

TEST REPORT

Reference No...... : WTS18S07116776-2W V1
FCC ID : 2AEPIBLACK
Applicant..... : COLOMBIANA DE COMERCIO S.A.
Address..... : Cra. 43E No 8-71 Medellin, Colombia
Manufacturer : KONKA SMART TECHNOLOGY CO., LTD.
Address..... : 1#-327 Enterprise Service Centre, No.17 Third Section of North
Changjiang Road, Lingang Economic Development Zone of Yibin,
Sichuan Province. P.R.China
Product..... : Smart Phone
Model(s) : BLACK
Brand Name..... : Kalley
Standards..... : FCC CFR47 Part 15.247:2017
Date of Receipt sample : 2018-07-02
Date of Test : 2018-07-03 to 2018-07-19
Date of Issue..... : 2018-08-05
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Ford Wang

Ford Wang / Project Engineer

Approved by:



Philo Zhong

Philo Zhong / Manager

2 Laboratories Introduction

Waltek Services (Shenzhen) Co., Ltd is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation) of USA, Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CEC(California energy efficiency), IC(Industry Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek(ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.



Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. Electro Magnetic Compatibility (EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

Test Facility:**A. Accreditations for Conformity Assessment (International)**

Country/Region	Accreditation Body	Scope	Note
USA	A2LA (Certificate No.: 4243.01)	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India	International Services	WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note:			
1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476.			
2. IC Canada Registration No.: 7760A			

B. TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

3 Contents

	Page
1 COVER PAGE.....	1
2 LABORATORIES INTRODUCTION.....	2
3 CONTENTS	4
4 REVISION HISTORY	6
5 GENERAL INFORMATION.....	7
5.1 GENERAL DESCRIPTION OF E.U.T.	7
5.2 DETAILS OF E.U.T.	7
5.3 CHANNEL LIST	9
5.4 TEST MODE	9
6 TEST SUMMARY	10
7 EQUIPMENT USED DURING TEST	11
7.1 EQUIPMENTS LIST	11
7.2 DESCRIPTION OF SUPPORT UNITS	12
7.3 MEASUREMENT UNCERTAINTY	12
7.4 TEST EQUIPMENT CALIBRATION	12
8 CONDUCTED EMISSION	13
8.1 E.U.T. OPERATION	13
8.2 EUT SETUP.....	13
8.3 MEASUREMENT DESCRIPTION	13
8.4 CONDUCTED EMISSION TEST RESULT	14
9 RADIATED SPURIOUS EMISSIONS.....	16
9.1 EUT OPERATION.....	16
9.2 TEST SETUP	17
9.3 SPECTRUM ANALYZER SETUP	18
9.4 TEST PROCEDURE	19
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	19
9.6 SUMMARY OF TEST RESULTS	20
10 CONDUCTED SPURIOUS EMISSIONS.....	23
10.1 TEST PROCEDURE.....	23
10.2 TEST RESULT	24
11 BAND EDGE MEASUREMENT	34
11.1 TEST PROCEDURE.....	34
11.2 TEST RESULT	35
12 20 DB BANDWIDTH MEASUREMENT	41
12.1 TEST PROCEDURE.....	41
12.2 TEST RESULT	41
13 MAXIMUM PEAK OUTPUT POWER	47
13.1 TEST PROCEDURE.....	47
13.2 TEST RESULT	47
14 HOPPING CHANNEL SEPARATION	53
14.1 TEST PROCEDURE.....	53

14.2	TEST RESULT	53
15	NUMBER OF HOPPING FREQUENCY.....	59
15.1	TEST PROCEDURE.....	59
15.2	TEST RESULT	59
16	DWELL TIME	61
16.1	TEST PROCEDURE.....	61
16.2	TEST RESULT	61
17	ANTENNA REQUIREMENT	67
18	RF EXPOSURE.....	68
19	PHOTOGRAPHS OF TEST SETUP AND EUT.....	69

4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS18S07116 776-2W	2018-07-02	2018-07-03 to 2018-07- 19	2018-07-20	original	-	Replaced
WTS18S07116 776-2W V1	2018-07-02	2018-07-03 to 2018-07- 19	2018-08-05	Version 1	Updated	Valid

5 General Information

5.1 General Description of E.U.T.

Product:	Smart Phone
Model(s):	BLACK
Model Description:	N/A
GSM Band(s):	GSM 850/900/1800/1900MHz
GPRS/EGPRS Class:	12
WCDMA Band(s):	FDD Band II/V
LTE Band(s):	FDD Band 4/7
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40
Bluetooth Version:	Bluetooth v4.0 with BLE
GPS:	Support
NFC:	N/A
Hardware Version:	M3708W_MB_V1.0_20170904
Software Version:	Kalley_BLACK_v01_20180621
Highest frequency (Exclude Radio):	1.25GHz
Storage Location:	Internal Storage
Note:	N/A

5.2 Details of E.U.T.

Operation Frequency:	GSM/GPRS/EDGE 850: 824~849MHz PCS/GPRS/EDGE 1900: 1850~1910MHz WCDMA Band II: 1850~1910MHz WCDMA Band V: 824~849MHz LTE Band 4: 1710~1755MHz LTE Band 7: 2500~2570MHz WiFi: 802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz Bluetooth: 2402~2480MHz
Max. RF output power:	GSM 850: 32.75dBm PCS1900: 30.31dBm WCDMA Band II: 22.43dBm WCDMA Band V: 22.70dBm LTE Band 4: 22.98dBm LTE Band 7: 23.99dBm WiFi(2.4G): 9.61dBm

	Bluetooth: 4.82dBm
Type of Modulation:	GSM,GPRS: GMSK EDGE: GMSK, 8PSK WCDMA: BPSK, 16QAM LTE: QPSK, 16QAM WiFi: CCK, OFDM
Antenna installation:	Bluetooth: GFSK, Pi/4 DQPSK, 8DPSK GSM/WCDMA/LTE: internal permanent antenna WiFi/Bluetooth: internal permanent antenna
Antenna Gain:	GSM 850: -0.7dBi PCS1900: -0.39dBi WCDMA Band II: -0.39dBi WCDMA Band V: -0.7dBi LTE Band 4: -0.22dBi LTE Band 7: -0.12dBi WiFi(2.4G): -0.2dBi Bluetooth: -0.2dBi
Ratings:	Battery DC 3.85V, 3000mAh DC 5V, 2.0A, charging from adapter (Adapter Input: 100-240V~50/60Hz 0.35A)
Adapter:	Manufacturer: DONGGUAN AOHAI POWER TECHNOLOGY CO.,LTD. Model No.: A8A-050200U-US1

5.3 Channel List

Normal

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

5.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests; the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz

6 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious emissions	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conducted Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	Complies
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

7 Equipment Used during Test

7.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2017-09-12	2018-09-11
2.	LISN	R&S	ENV216	101215	2017-09-12	2018-09-11
3.	Cable	Top	TYPE16(3.5M)	-	2017-09-12	2018-09-11
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2017-09-12	2018-09-11
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2017-09-12	2018-09-11
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2017-09-12	2018-09-11
4.	Cable	LARGE	RF300	-	2017-09-12	2018-09-11
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2018-04-29	2019-04-28
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2018-04-09	2019-04-08
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2018-04-09	2019-04-08
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2017-09-12	2018-09-11
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2018-04-09	2019-04-08
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2018-04-09	2019-04-08
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2018-04-13	2019-04-12
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2018-04-13	2019-04-12
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2018-04-13	2019-04-12
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2018-04-09	2019-04-08
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2018-04-13	2019-04-12
4	Cable	HUBER+SUHNER	CBL2	525178	2018-04-13	2019-04-12

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2017-09-12	2018-09-11
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2017-09-12	2018-09-11
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2017-09-12	2018-09-11

7.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

7.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64 dB(AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08 dB (Bilog antenna 30M~1000MHz)
	± 4.99 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 ⁻⁷ Hz
RF Power	± 0.42 dB
Dwell time	1.0%
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor:k=2	

7.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

8 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207

Test Method: ANSI C63.10:2013

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Class/Severity: Class B

Limit:

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 6*	56 to 46*
.5 to 5	56	46
5 to 30	60	50

8.1 E.U.T. Operation

Operating Environment :

Temperature: 22.8 °C

Humidity: 52.6 % RH


Atmospheric Pressure: 101.2kPa

EUT Operation :

The test was performed in TX Transmitting mode, the test data were shown in the report.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013.

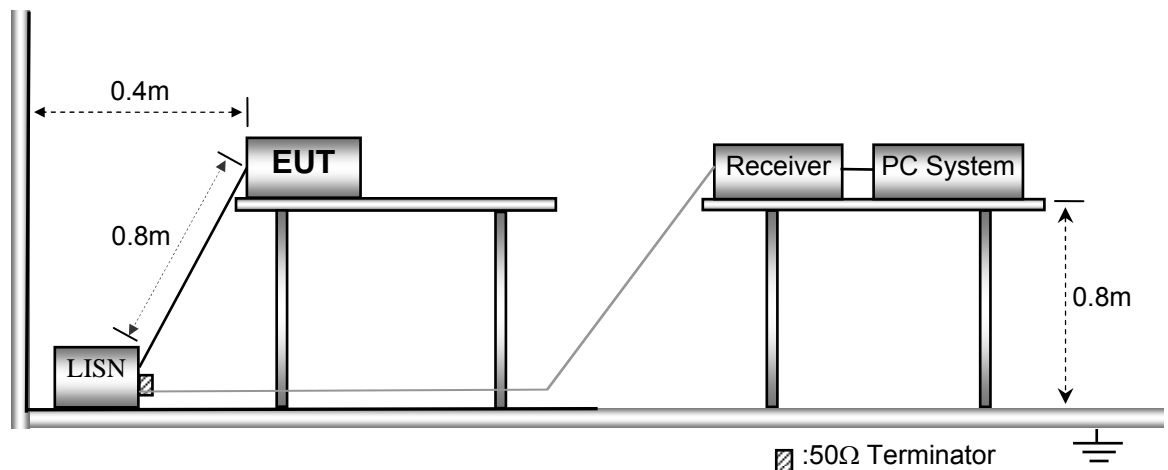


8.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

8.4 Conducted Emission Test Result


Remark: only the worst data (GFSK modulation Low channel mode) were reported

Live line:

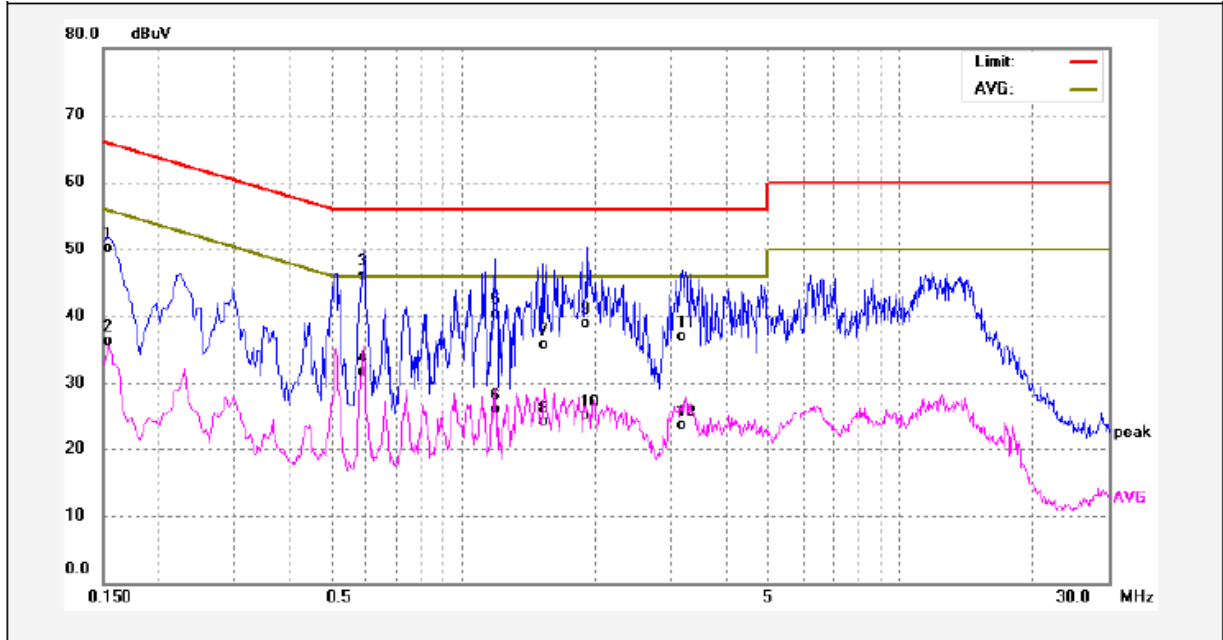

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	40.08	10.02	50.10	65.78	-15.68	QP	
2	0.1539	26.25	10.02	36.27	55.78	-19.51	AVG	
3	0.5940	36.13	10.06	46.19	56.00	-9.81	QP	
4	0.5940	21.68	10.06	31.74	46.00	-14.26	AVG	
5	1.1860	29.82	10.39	40.21	56.00	-15.79	QP	
6	1.1860	15.67	10.39	26.06	46.00	-19.94	AVG	
7	1.5140	25.53	10.15	35.68	56.00	-20.32	QP	
8	1.5140	13.88	10.15	24.03	46.00	-21.97	AVG	
9	1.9260	28.76	10.19	38.95	56.00	-17.05	QP	
10	1.9260	14.90	10.19	25.09	46.00	-20.91	AVG	
11	3.1619	26.57	10.24	36.81	56.00	-19.19	QP	
12	3.1619	13.36	10.24	23.60	46.00	-22.40	AVG	

Neutral line:

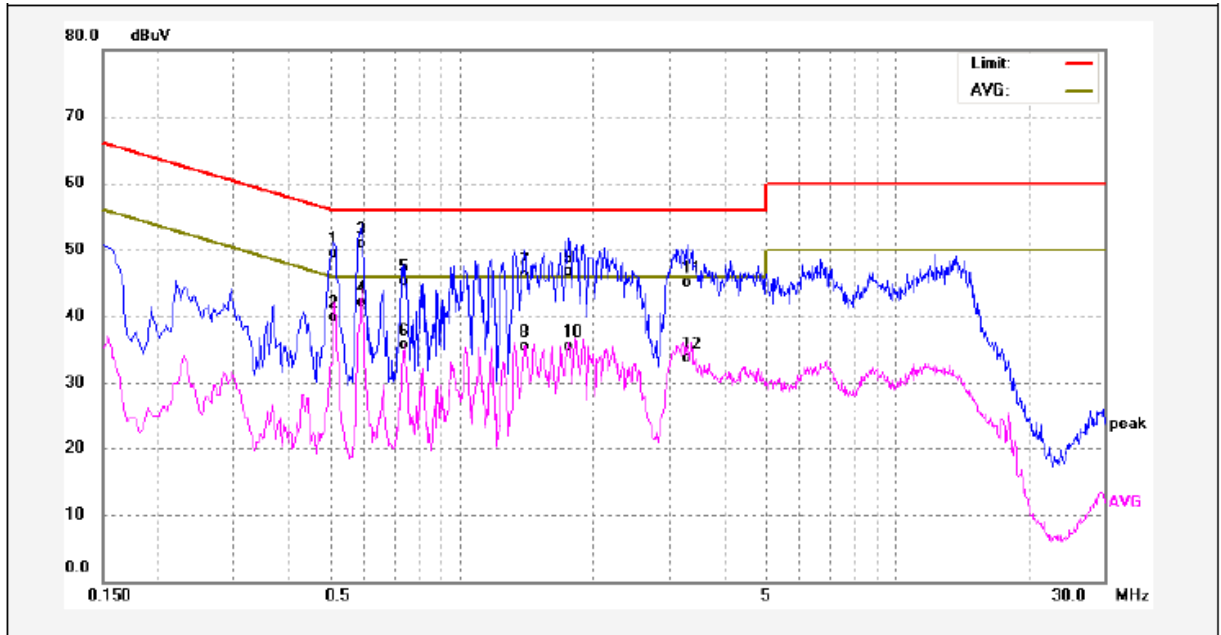

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.5100	39.36	10.08	49.44	56.00	-6.56	QP	
2	0.5100	29.86	10.08	39.94	46.00	-6.06	AVG	
3	0.5899	40.77	10.06	50.83	56.00	-5.17	QP	
4	0.5899	31.97	10.06	42.03	46.00	-3.97	AVG	
5	0.7420	35.15	10.11	45.26	56.00	-10.74	QP	
6	0.7420	25.52	10.11	35.63	46.00	-10.37	AVG	
7	1.4020	36.04	10.23	46.27	56.00	-9.73	QP	
8	1.4020	25.31	10.23	35.54	46.00	-10.46	AVG	
9	1.7620	36.60	10.18	46.78	56.00	-9.22	QP	
10	1.7620	25.24	10.18	35.42	46.00	-10.58	AVG	
11	3.2940	34.84	10.25	45.09	56.00	-10.91	QP	
12	3.2940	23.46	10.25	33.71	46.00	-12.29	AVG	

9 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.205 &15.209 & 15.247

Test Method: ANSI C63.10: 2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

9.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in TX Transmitting mode, the test data were shown in the report.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

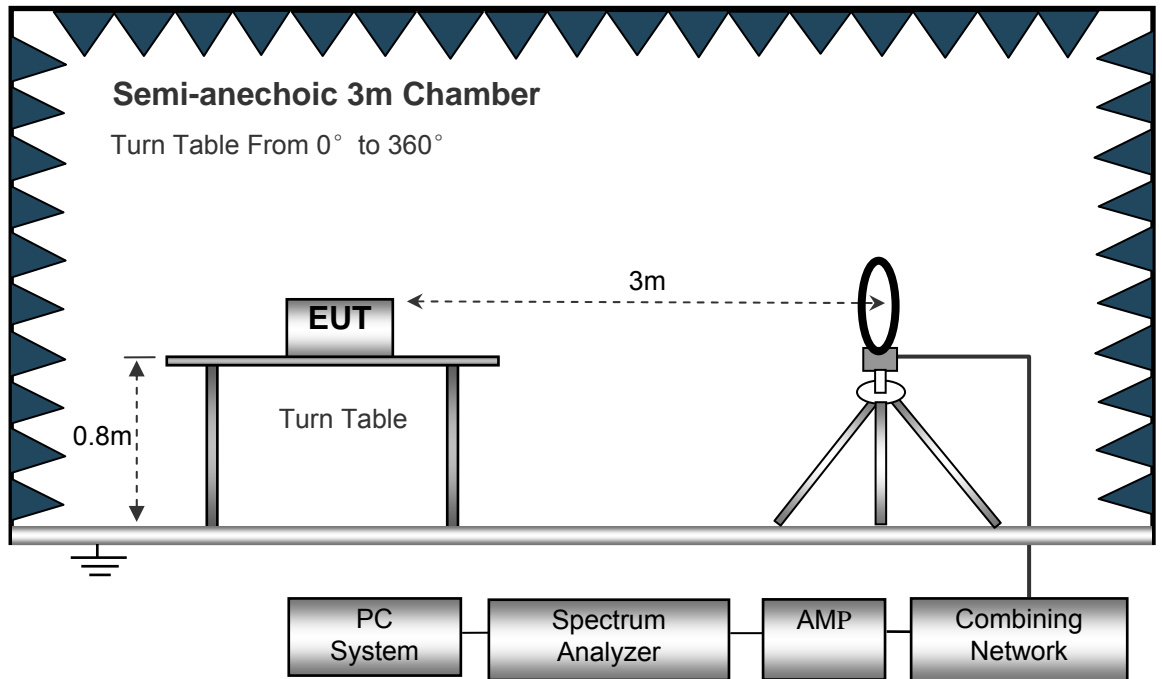

The test setup for emission measurement from 30 MHz to 1 GHz.

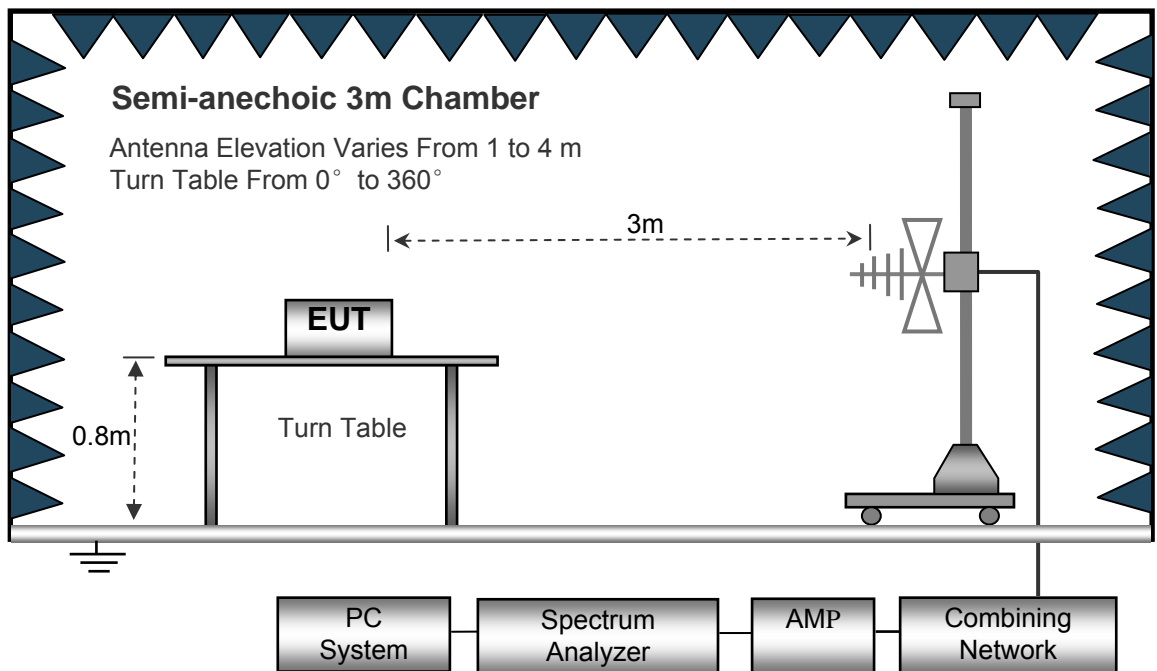

The test setup for emission measurement above 1 GHz.

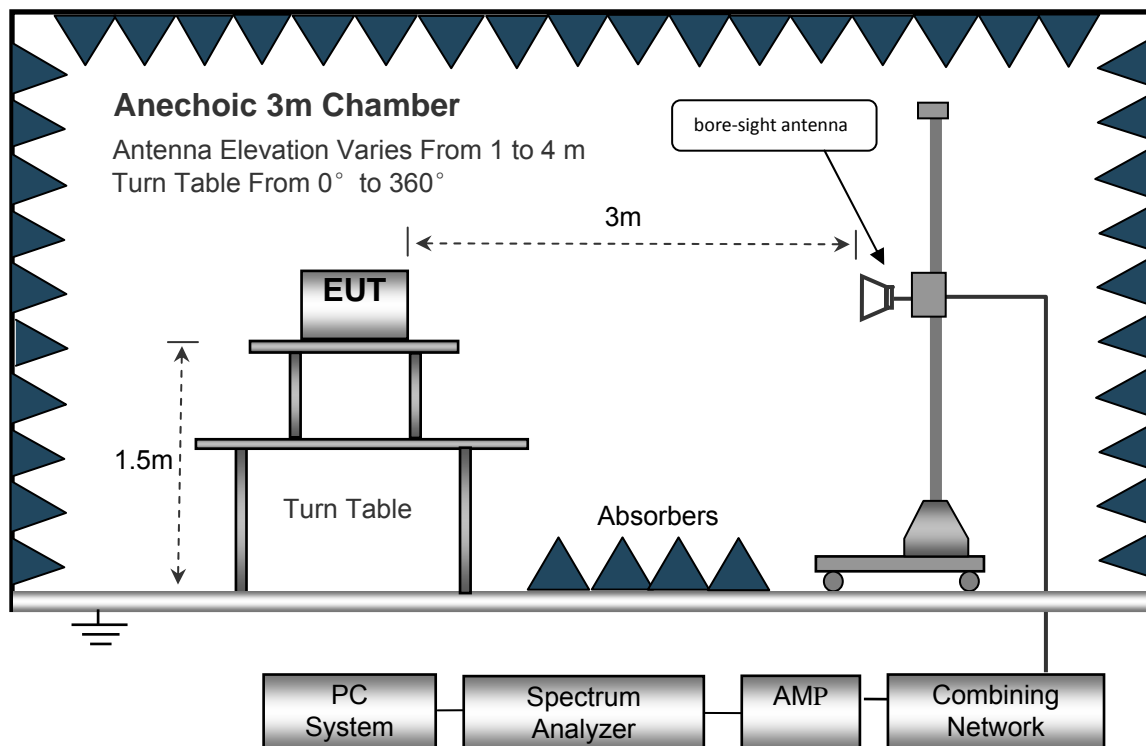

9.3 Spectrum Analyzer Setup

Below 30MHz

- Sweep Speed Auto
- IF Bandwidth..... 10kHz
- Video Bandwidth..... 10kHz
- Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

- Sweep Speed Auto
- Detector PK
- Resolution Bandwidth..... 100kHz
- Video Bandwidth..... 300kHz

Above 1GHz

- Sweep Speed Auto
- Detector PK
- Resolution Bandwidth..... 1MHz
- Video Bandwidth..... 3MHz
- Detector Ave.
- Resolution Bandwidth..... 1MHz
- Video Bandwidth..... 10Hz

9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

9.6 Summary of Test Results

Test Frequency: 9KHz~30MHz

Remark: only the worst data (GFSK modulation Low channel mode) were reported

Frequency	Measurement results dB μ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB μ V/m @30m	Limits dB μ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
6.021	25.30	QP	21.84	40.00	7.14	29.54	-22.40
15.730	25.17	QP	21.35	40.00	6.52	29.54	-23.02
25.680	24.86	QP	20.67	40.00	5.53	29.54	-24.01

Test Frequency: 30MHz ~ 18GHz

Remark: only the worst data (GFSK modulation mode) were reported.

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Low Channel									
268.32	36.21	QP	318	2.0	H	-13.35	22.86	46.00	-23.14
268.32	41.58	QP	307	1.9	V	-13.35	28.23	46.00	-17.77
4804.00	46.73	PK	129	1.6	V	-1.06	45.67	74.00	-28.33
4804.00	43.34	Ave	129	1.6	V	-1.06	42.28	54.00	-11.72
7206.00	41.13	PK	1	1.5	H	1.33	42.46	74.00	-31.54
7206.00	35.00	Ave	1	1.5	H	1.33	36.33	54.00	-17.67
2319.64	45.15	PK	244	1.8	V	-13.19	31.96	74.00	-42.04
2319.64	37.81	Ave	244	1.8	V	-13.19	24.62	54.00	-29.38
2368.52	43.01	PK	328	1.8	H	-13.14	29.87	74.00	-44.13
2368.52	36.07	Ave	328	1.8	H	-13.14	22.93	54.00	-31.07
2488.66	43.34	PK	223	1.6	V	-13.08	30.26	74.00	-43.74
2488.66	38.41	Ave	223	1.6	V	-13.08	25.33	54.00	-28.67

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Middle Channel									
268.32	35.52	QP	271	1.6	H	-13.35	22.17	46.00	-23.83
268.32	41.88	QP	159	1.1	V	-13.35	28.53	46.00	-17.47
4882.00	47.03	PK	260	1.3	V	-0.62	46.41	74.00	-27.59
4882.00	42.52	Ave	260	1.3	V	-0.62	41.90	54.00	-12.10
7323.00	40.75	PK	315	1.1	H	2.21	42.96	74.00	-31.04
7323.00	34.08	Ave	315	1.1	H	2.21	36.29	54.00	-17.71
2336.49	46.79	PK	31	1.4	V	-13.19	33.60	74.00	-40.40
2336.49	37.70	Ave	31	1.4	V	-13.19	24.51	54.00	-29.49
2372.73	42.05	PK	2	1.9	H	-13.14	28.91	74.00	-45.09
2372.73	38.75	Ave	2	1.9	H	-13.14	25.61	54.00	-28.39
2491.01	43.43	PK	16	1.5	V	-13.08	30.35	74.00	-43.65
2491.01	38.12	Ave	16	1.5	V	-13.08	25.04	54.00	-28.96

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK High Channel									
268.32	35.05	QP	176	1.9	H	-13.35	21.70	46.00	-24.30
268.32	43.17	QP	139	1.0	V	-13.35	29.82	46.00	-16.18
4960.00	48.37	PK	330	1.2	V	-0.24	48.13	74.00	-25.87
4960.00	42.12	Ave	330	1.2	V	-0.24	41.88	54.00	-12.12
7440.00	39.33	PK	40	1.9	H	2.84	42.17	74.00	-31.83
7440.00	33.33	Ave	40	1.9	H	2.84	36.17	54.00	-17.83
2324.97	45.86	PK	338	1.2	V	-13.19	32.67	74.00	-41.33
2324.97	38.58	Ave	338	1.2	V	-13.19	25.39	54.00	-28.61
2388.03	45.00	PK	340	1.8	H	-13.14	31.86	74.00	-42.14
2388.03	37.58	Ave	340	1.8	H	-13.14	24.44	54.00	-29.56
2497.36	43.03	PK	205	1.1	V	-13.08	29.95	74.00	-44.05
2497.36	36.47	Ave	205	1.1	V	-13.08	23.39	54.00	-30.61

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not recorded

10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10: 2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 30MHz:


RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

10.2 Test Result


9KHz - 30MHz GFSK

Low Channel

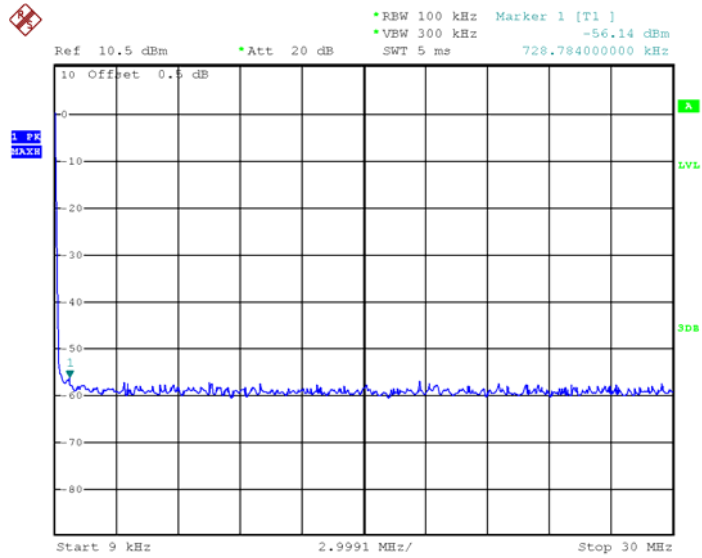


Date: 13.JUL.2018 01:53:24

Middle Channel

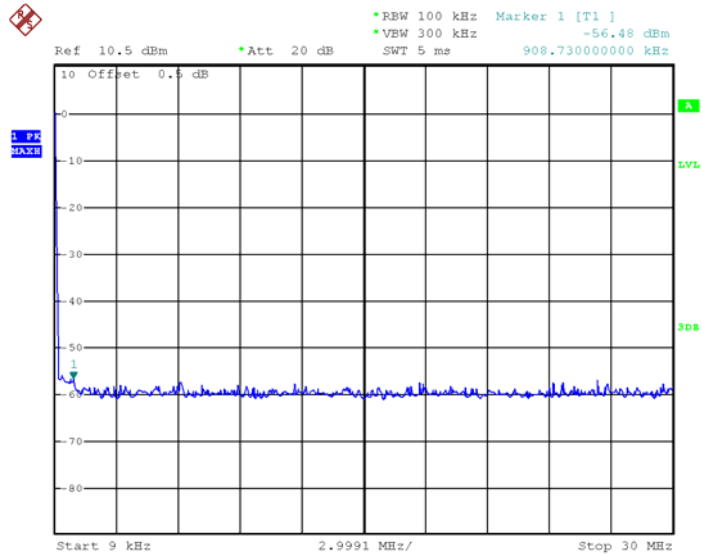

Date: 13.JUL.2018 01:53:44


High Channel

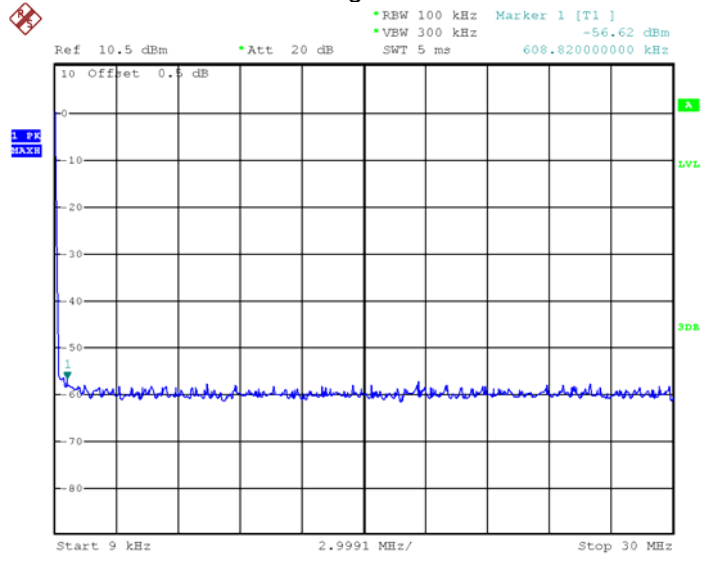


Date: 13.JUL.2018 01:54:12

Pi/4DQPSK


Low Channel

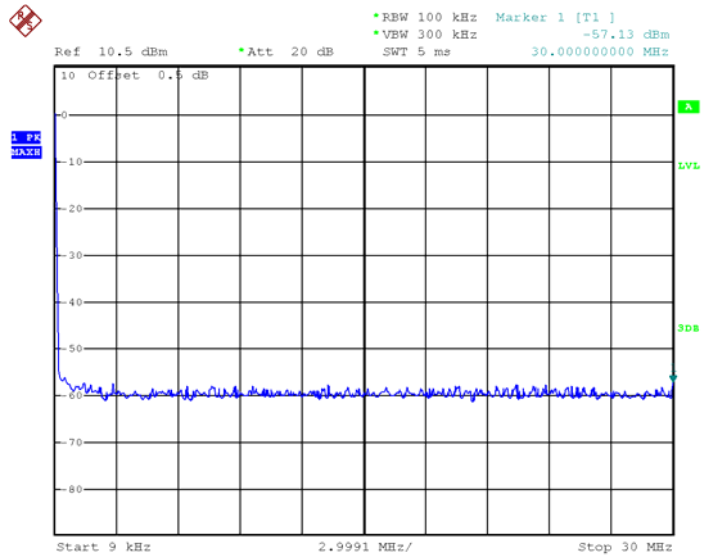

Date: 13.JUL.2018 01:55:22

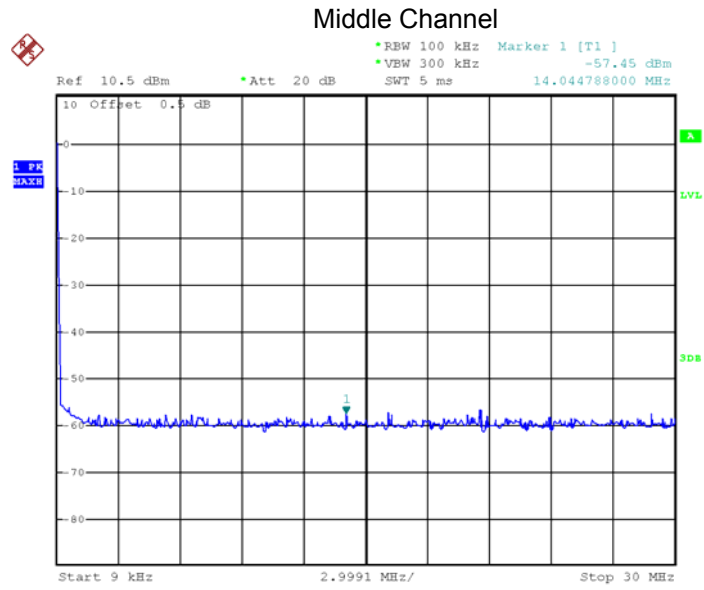


Date: 13.JUL.2018 01:55:01

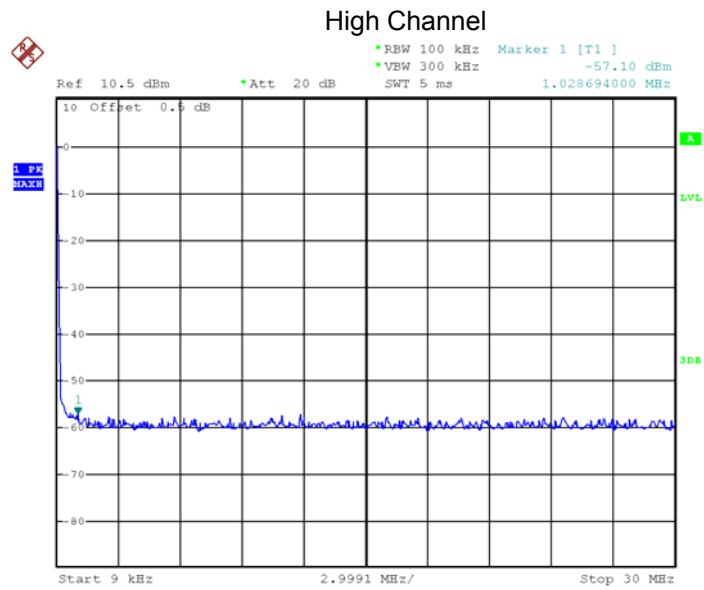

Date: 13.JUL.2018 01:54:39


8DPSK

Low Channel

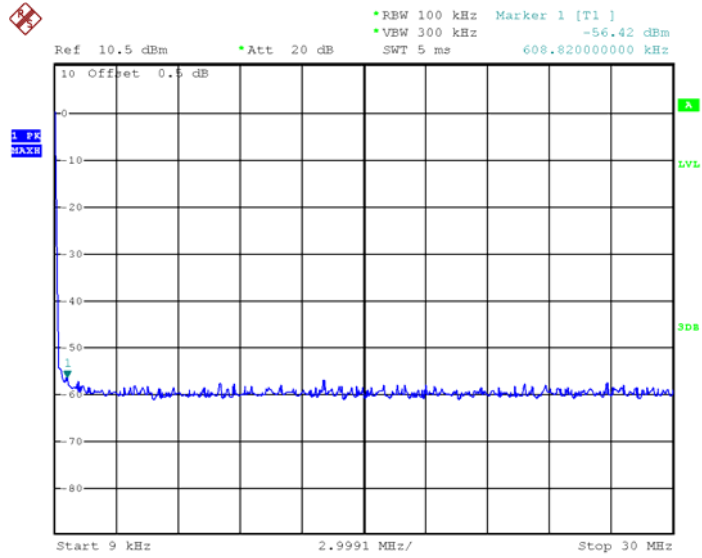


Date: 13.JUL.2018 01:55:42

Middle Channel

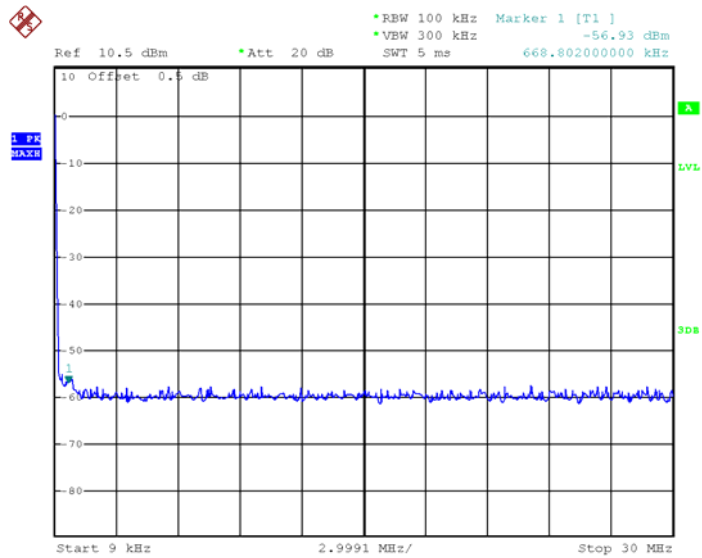

Date: 13.JUL.2018 01:56:00

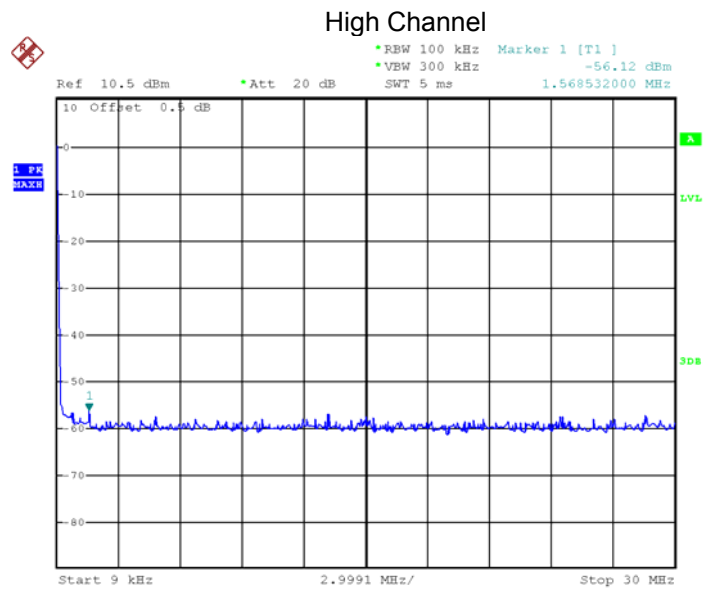

Date: 13.JUL.2018 01:56:22


30MHz – 25GHz
GFSK Low Channel

Fundamental



GFSK Middle Channel

Fundamental

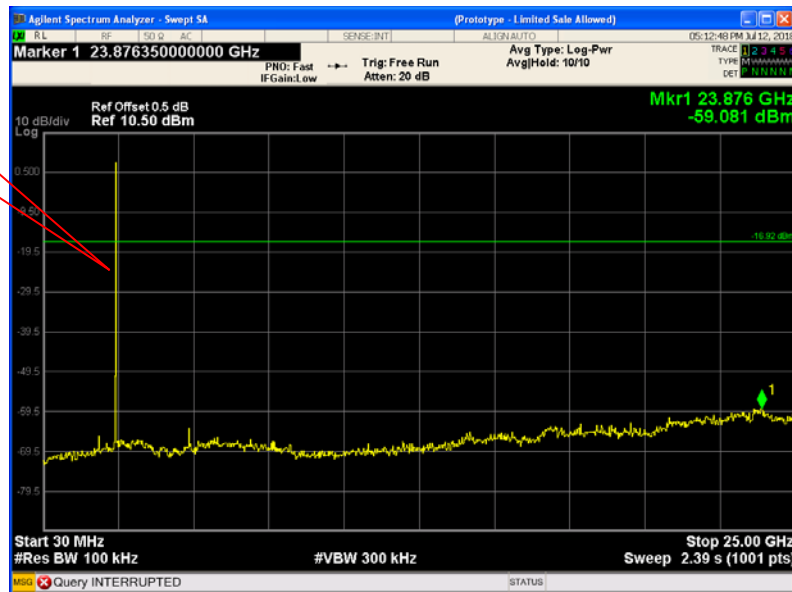


GFSK High Channel

Fundamental



Pi/4 DQPSK Low Channel

Fundamental

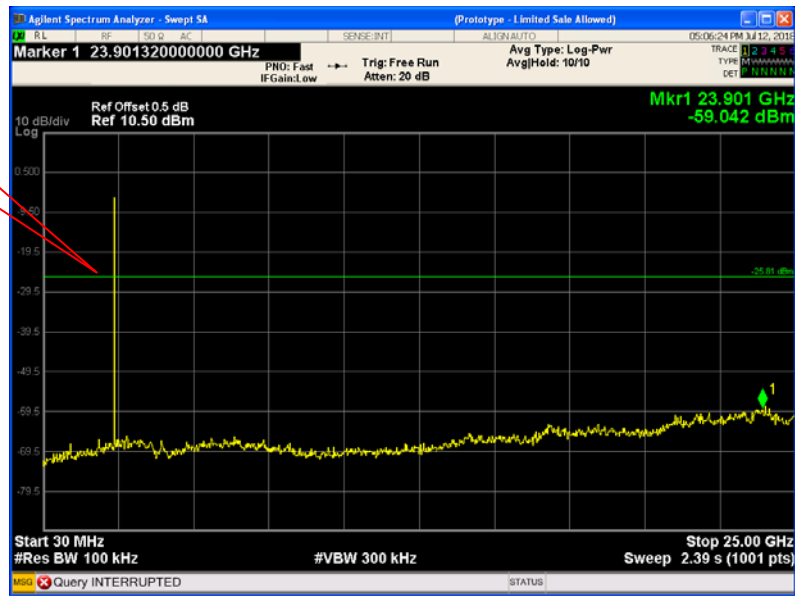

Pi/4 DQPSK Middle Channel

Fundamental



Pi/4 DQPSK High Channel

Fundamental



8DPSK Low Channel

Fundamental



8DPSK Middle Channel

Fundamental



8DPSK High Channel

Fundamental



11 Band Edge Measurement


Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold


11.2 Test Result

GFSK Transmitting Band edge-left side

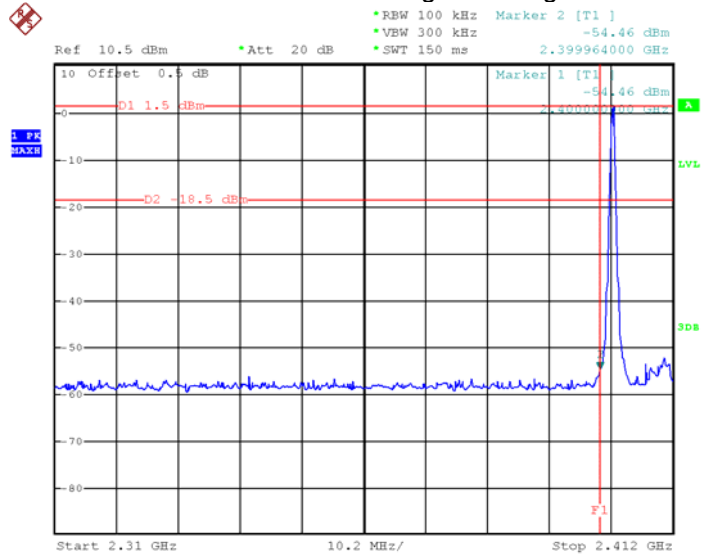


Date: 10.JUL.2018 22:34:33

GFSK Hopping Band edge-left side

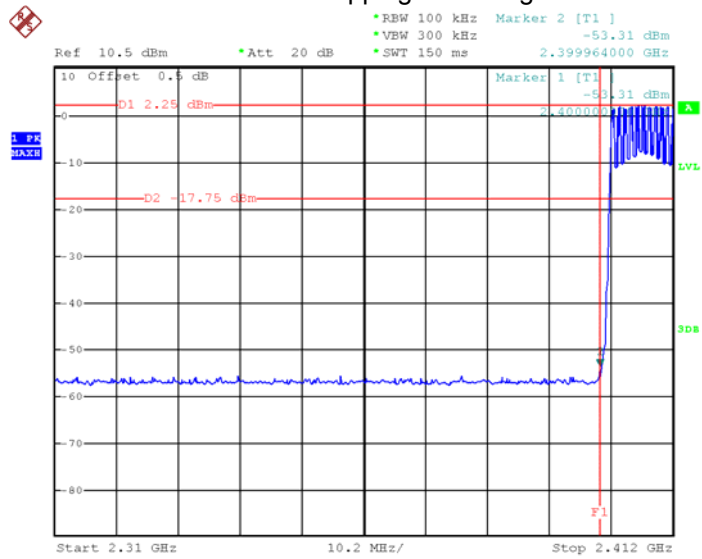


Date: 10.JUL.2018 22:29:21

GFSK Transmitting Band edge-right side

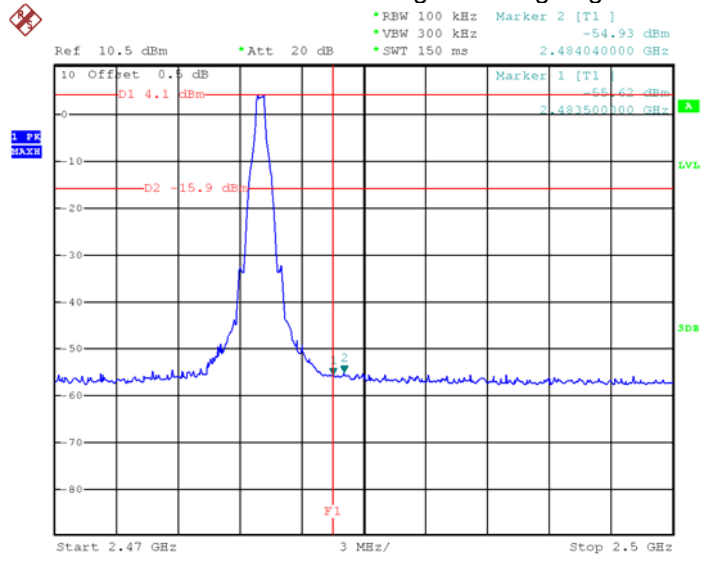


Date: 10.JUL.2018 22:01:11

GFSK Hopping Band edge-right side

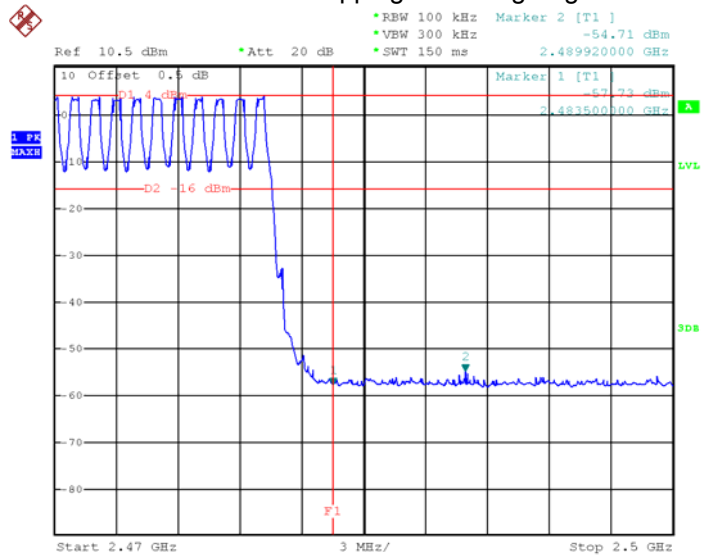


Date: 10.JUL.2018 22:05:37

Pi/4 DQPSK Transmitting Band edge-left side

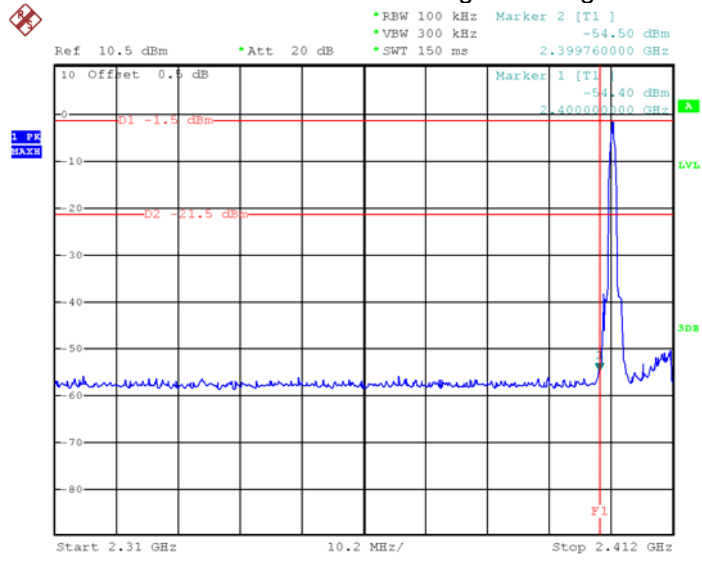


Date: 10.JUL.2018 22:37:20

Pi/4 DQPSK Hopping Band edge-left side

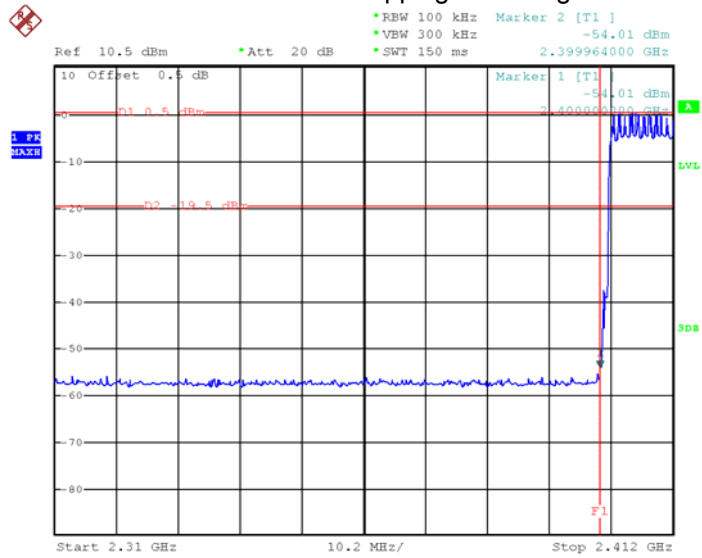


Date: 10.JUL.2018 22:42:52

Pi/4 DQPSK Transmitting Band edge-right side

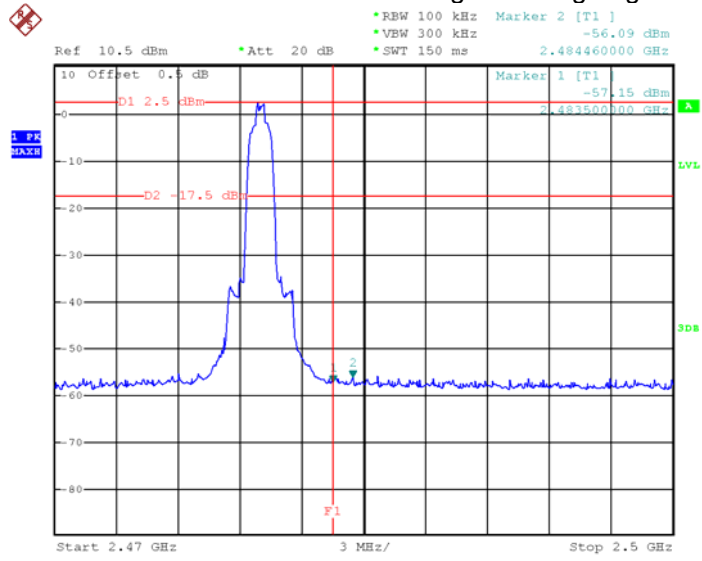


Date: 10.JUL.2018 22:48:31

Pi/4 DQPSK Hopping Band edge-right side

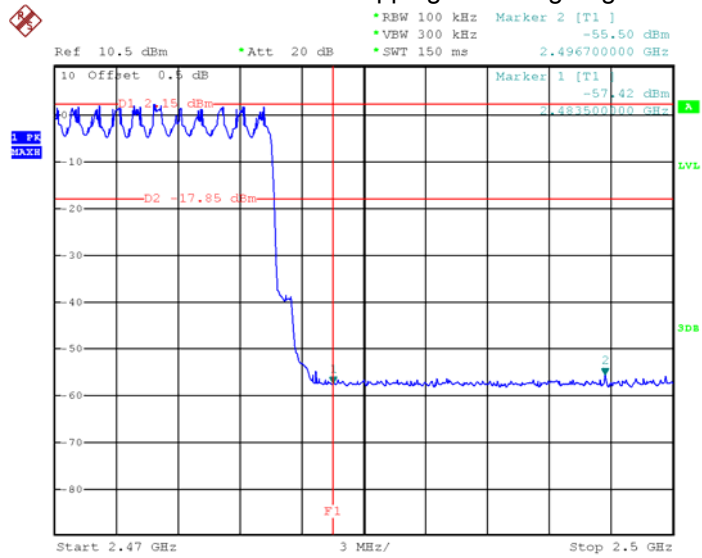


Date: 10.JUL.2018 22:47:30

8DPSK Transmitting Band edge-left side

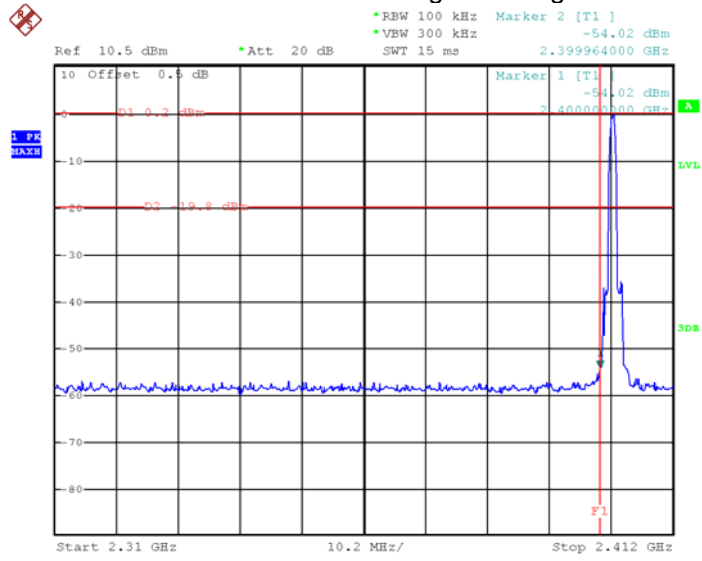


Date: 11.JUL.2018 01:06:09

8DPSK Hopping Band edge-left side

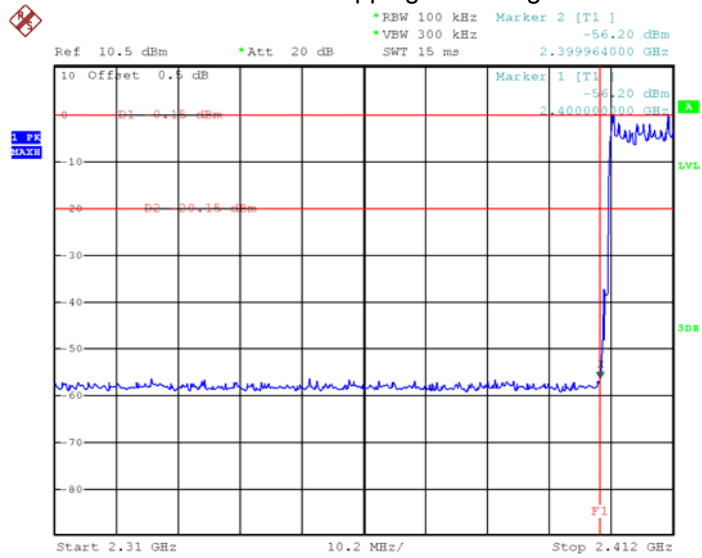


Date: 11.JUL.2018 01:08:04

8DPSK Transmitting Band edge-right side

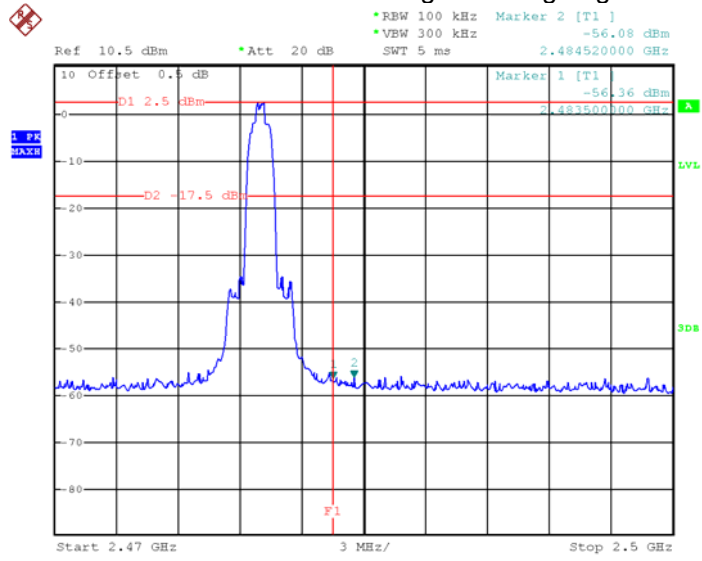

Date: 11.JUL.2018 01:11:14

8DPSK Hopping Band edge-right side

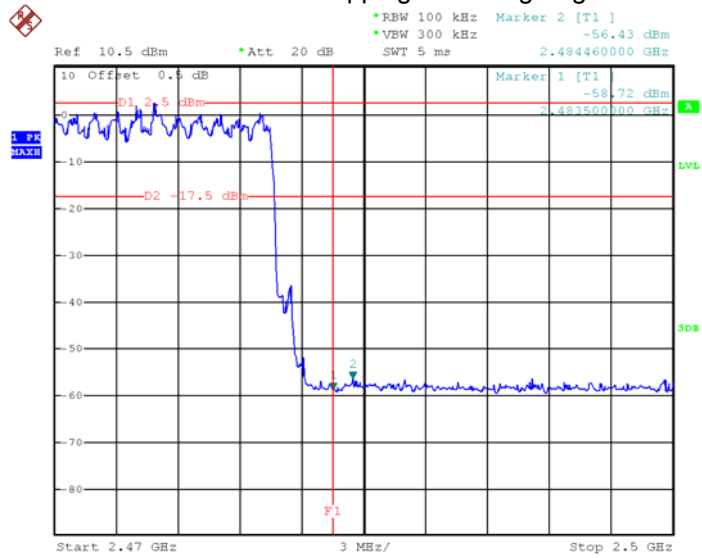

Date: 11.JUL.2018 01:10:00

12 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10: 2013

Test Mode: Test in fixing operating frequency at low, Middle, high channel.

12.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

12.2 Test Result

Modulation	Test Channel	Bandwidth(MHz)
GFSK	Low	1.026
GFSK	Middle	1.026
GFSK	High	1.026
Pi/4 DQPSK	Low	1.308
Pi/4 DQPSK	Middle	1.308
Pi/4 DQPSK	High	1.296
8DPSK	Low	1.296
8DPSK	Middle	1.284
8DPSK	High	1.290


Test plots

GFSK Low Channel

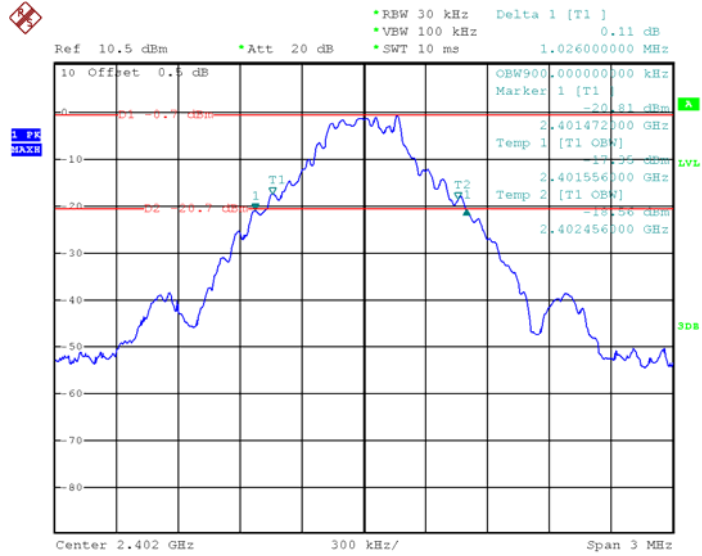


Date: 10.JUL.2018 21:42:04

GFSK Middle Channel

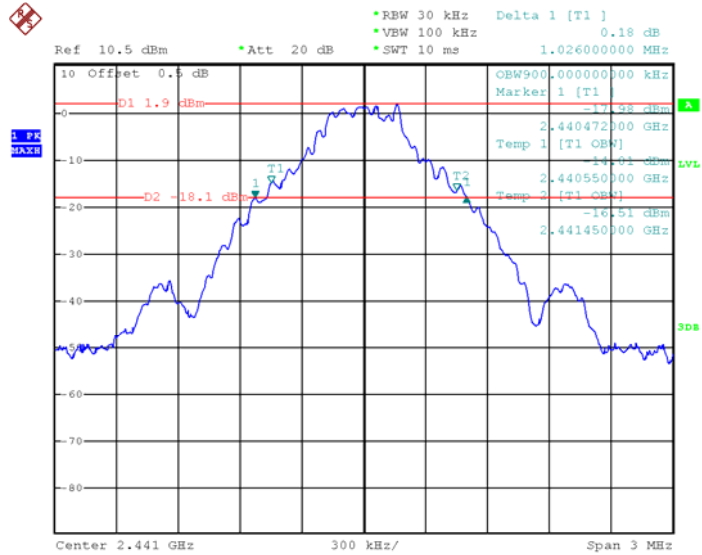


Date: 10.JUL.2018 21:43:11

GFSK High Channel

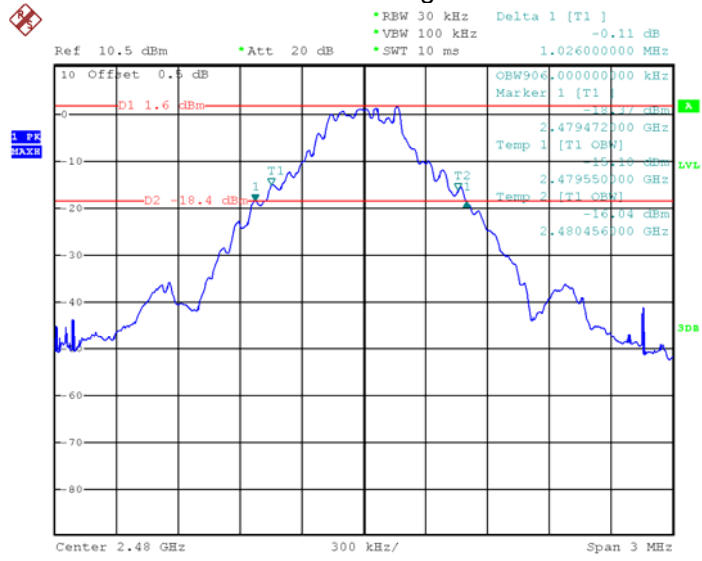


Date: 10.JUL.2018 21:47:50

Pi/4 DQPSK Low Channel

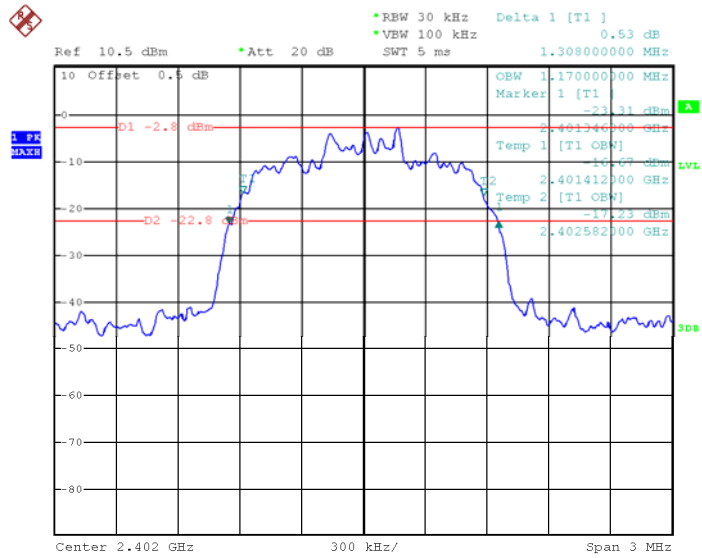


Date: 10.JUL.2018 22:51:56

Pi/4 DQPSK Middle Channel

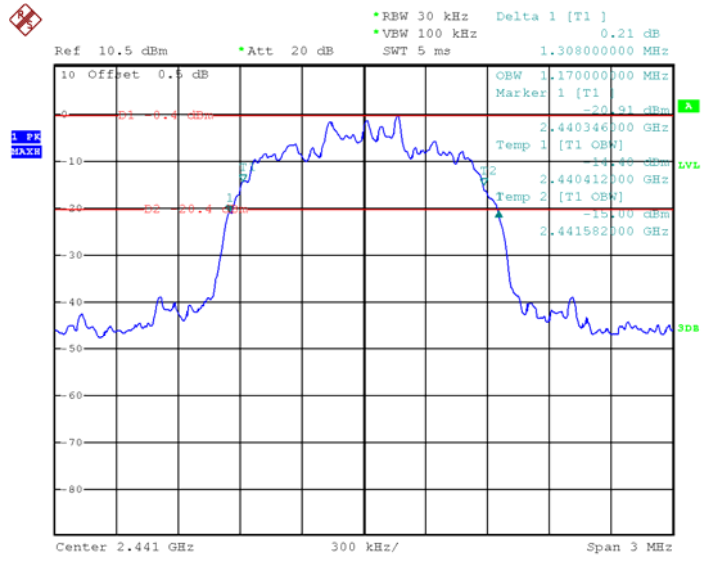


Date: 10.JUL.2018 22:52:51

Pi/4 DQPSK High Channel

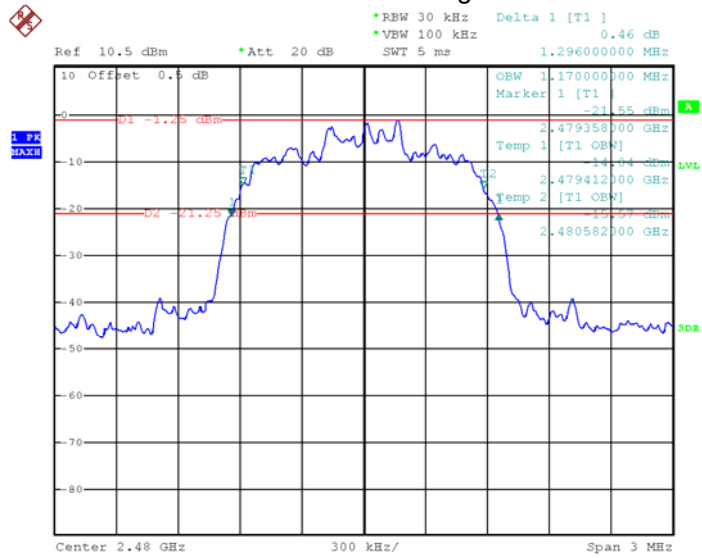


Date: 10.JUL.2018 22:54:07

8DPSK Low Channel

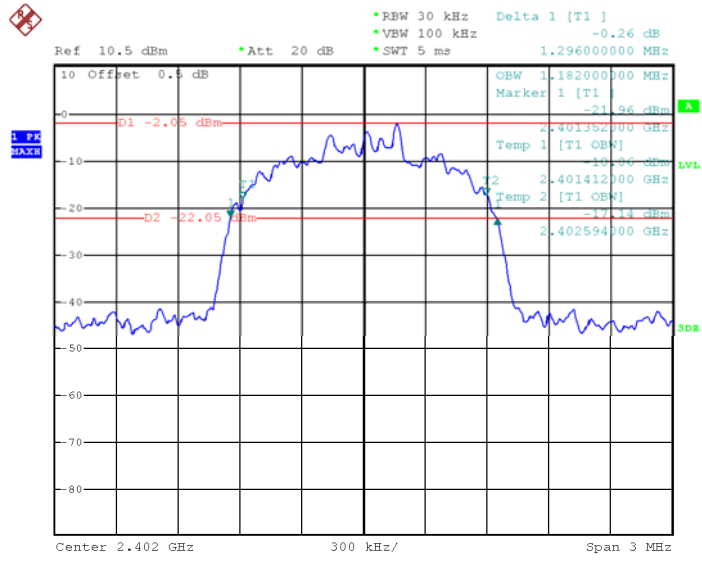


Date: 11.JUL.2018 00:56:24

8DPSK Middle Channel

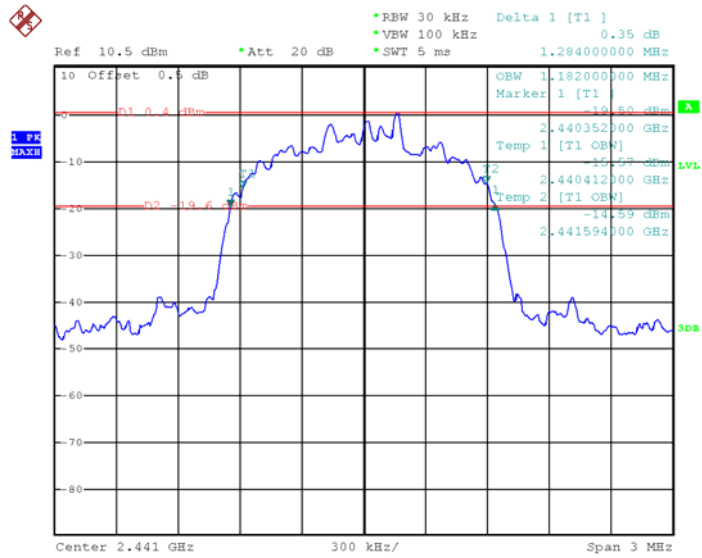

Date: 11.JUL.2018 00:55:05

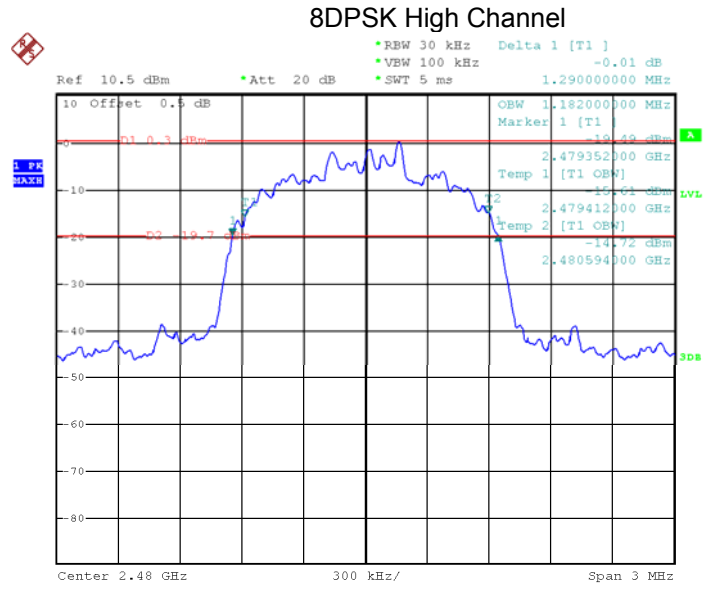

Date: 11.JUL.2018 00:53:51

13 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247 (a)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater: 0.125 watts..
Test mode:	Test in fixing frequency transmitting mode.

13.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

13.2 Test Result

Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	2.07	21
GFSK	Middle	4.82	21
GFSK	High	4.59	21
Pi/4 DQPSK	Low	1.06	21
Pi/4 DQPSK	Middle	3.60	21
Pi/4 DQPSK	High	3.31	21
8DPSK	Low	1.38	21
8DPSK	Middle	4.02	21
8DPSK	High	3.87	21


Test plots

GFSK Low Channel

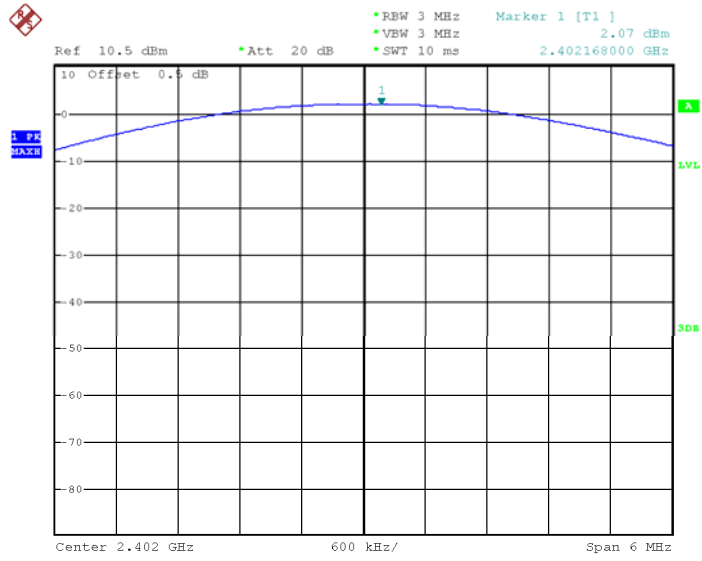


Date: 10.JUL.2018 21:39:44


GFSK Middle Channel

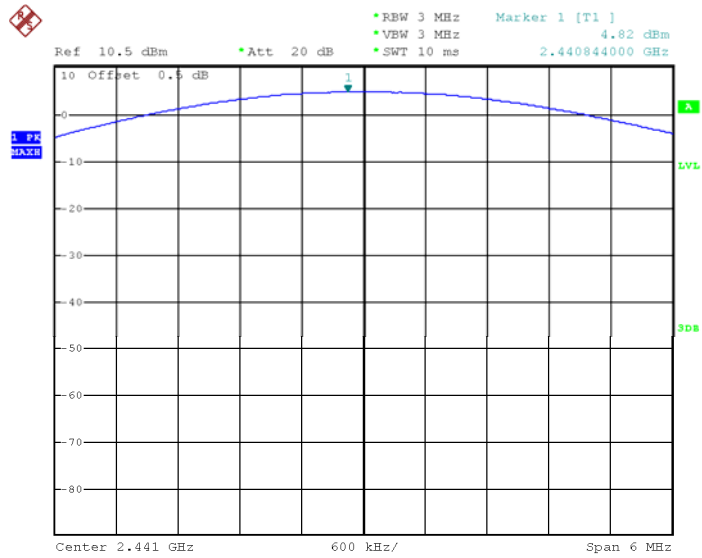


Date: 10.JUL.2018 21:40:04

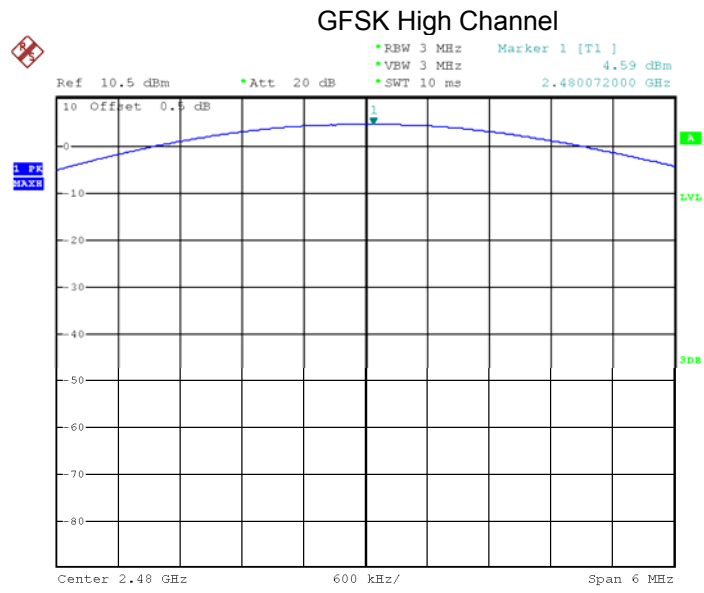


Date: 10.JUL.2018 21:40:20

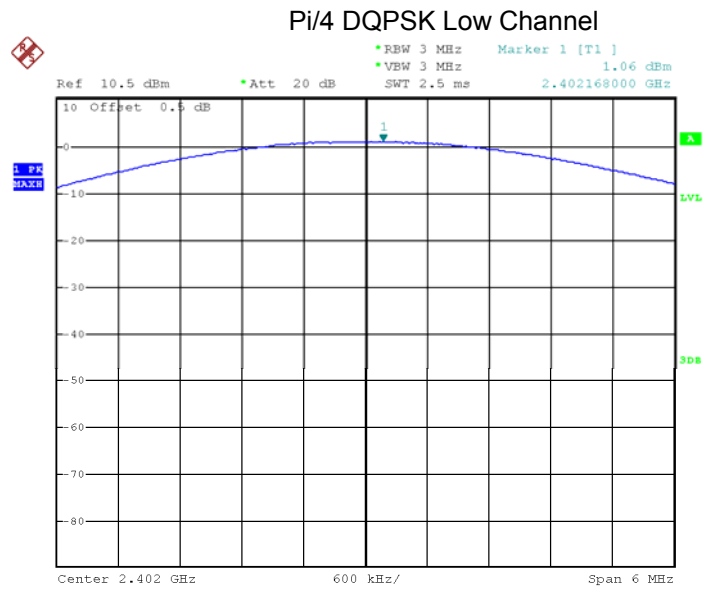


Date: 10.JUL.2018 22:50:08

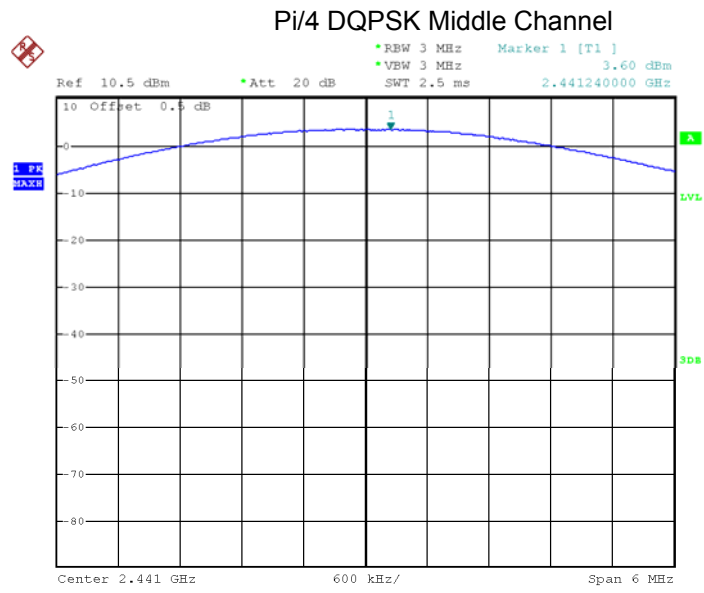


Date: 10.JUL.2018 22:49:47

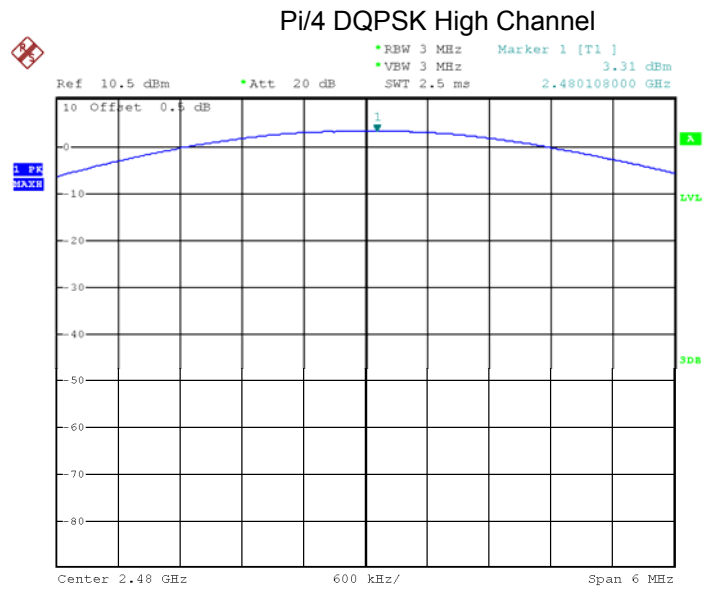


Date: 10.JUL.2018 22:49:30

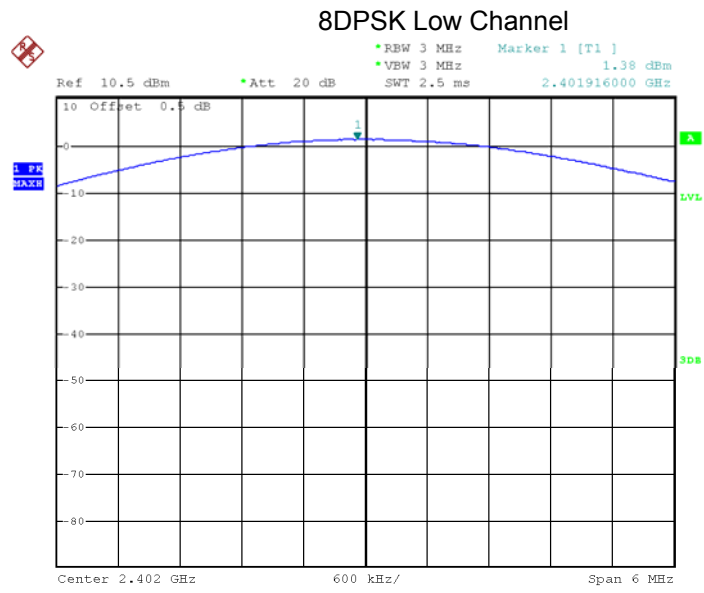

Date: 11.JUL.2018 00:50:44

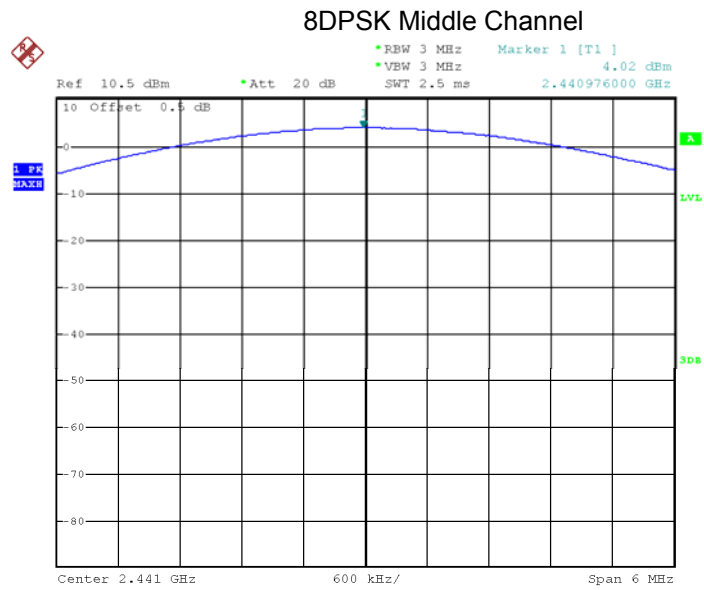

Date: 11.JUL.2018 00:51:09

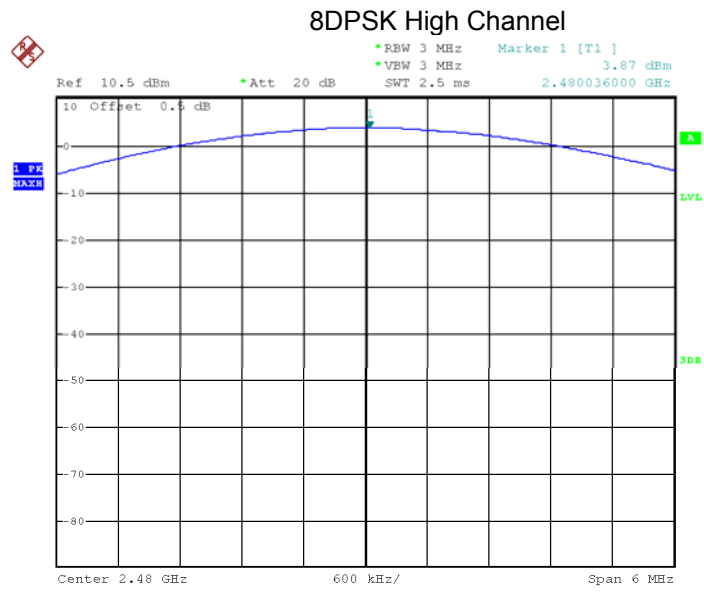

Date: 11.JUL.2018 00:51:44

14 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.
Test Mode:	Test in hopping transmitting operating mode.

14.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

14.2 Test Result

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.002	0.684	PASS
GFSK	Middle	1.002	0.684	PASS
GFSK	High	1.002	0.684	PASS
Pi/4 DQPSK	Low	1.002	0.872	PASS
Pi/4 DQPSK	Middle	1.002	0.872	PASS
Pi/4 DQPSK	High	1.002	0.864	PASS
8DPSK	Low	0.996	0.864	PASS
8DPSK	Middle	0.996	0.856	PASS
8DPSK	High	0.996	0.860	PASS


Test plots

GFSK Low Channel

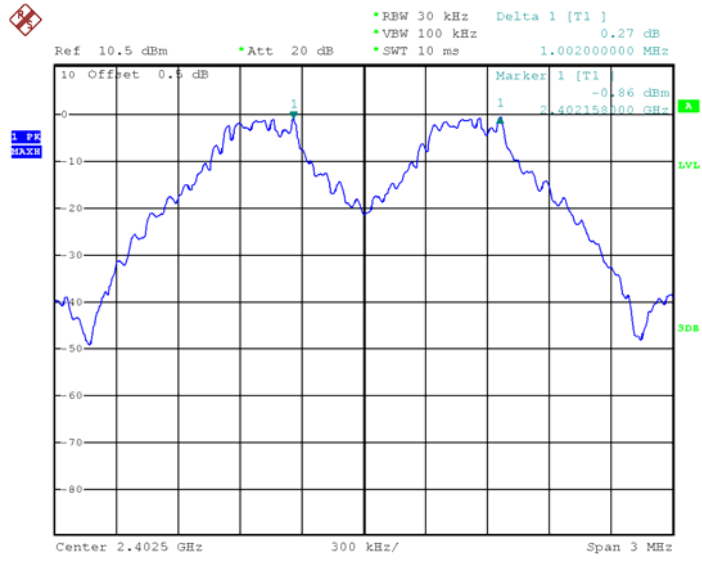


Date: 10.JUL.2018 21:52:10


GFSK Middle Channel

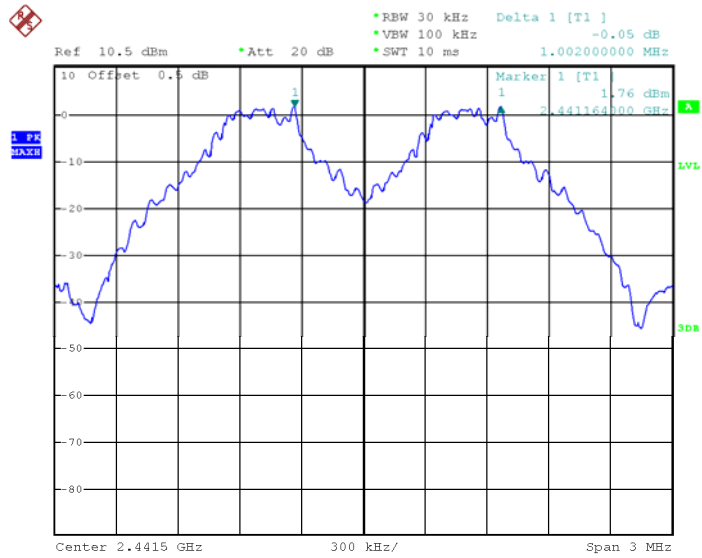


Date: 10.JUL.2018 21:51:05

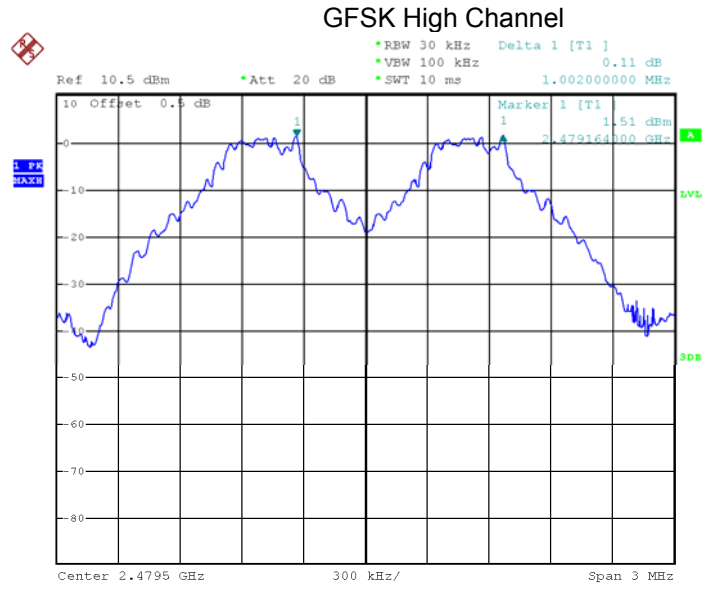


Date: 10.JUL.2018 21:49:16

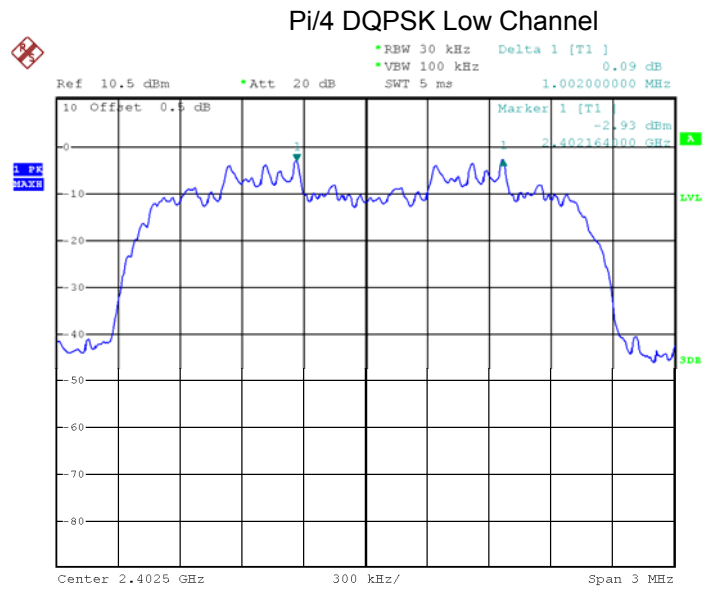


Date: 10.JUL.2018 23:05:20

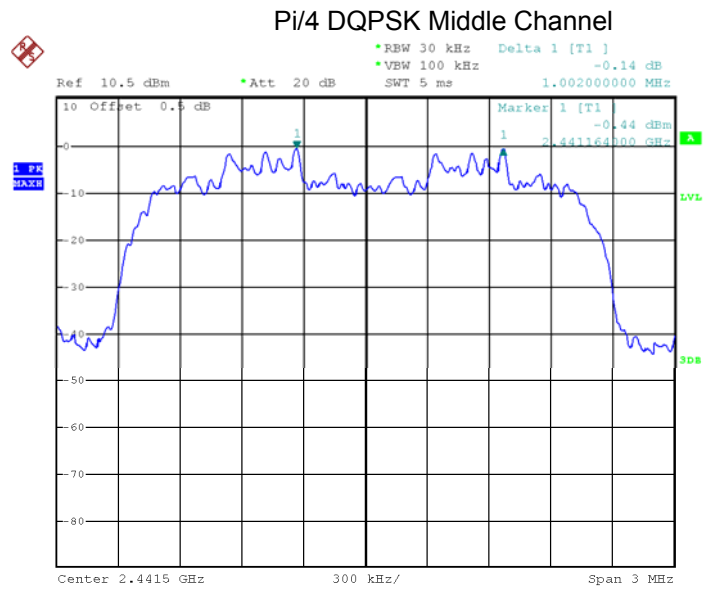


Date: 10.JUL.2018 23:03:19

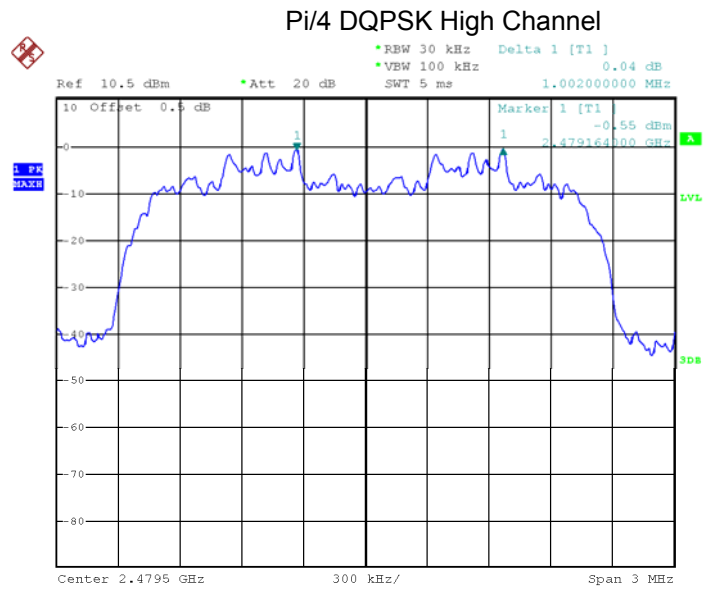


Date: 10.JUL.2018 23:01:39

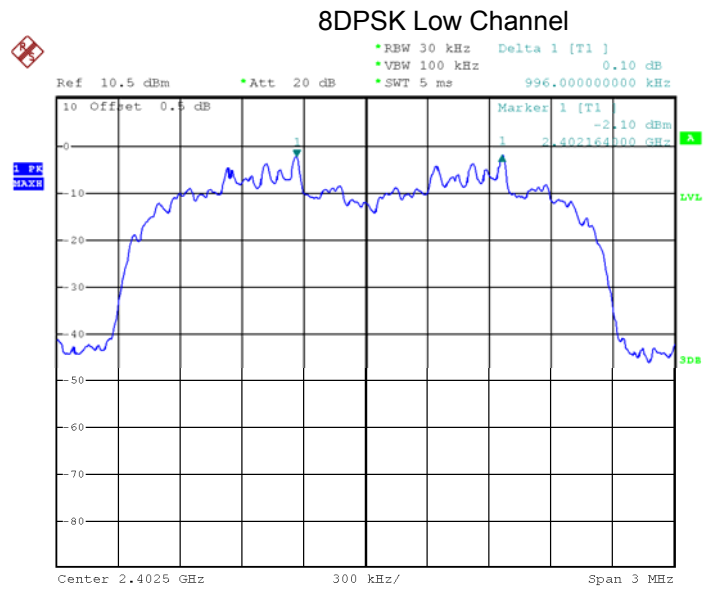

Date: 11.JUL.2018 00:57:55

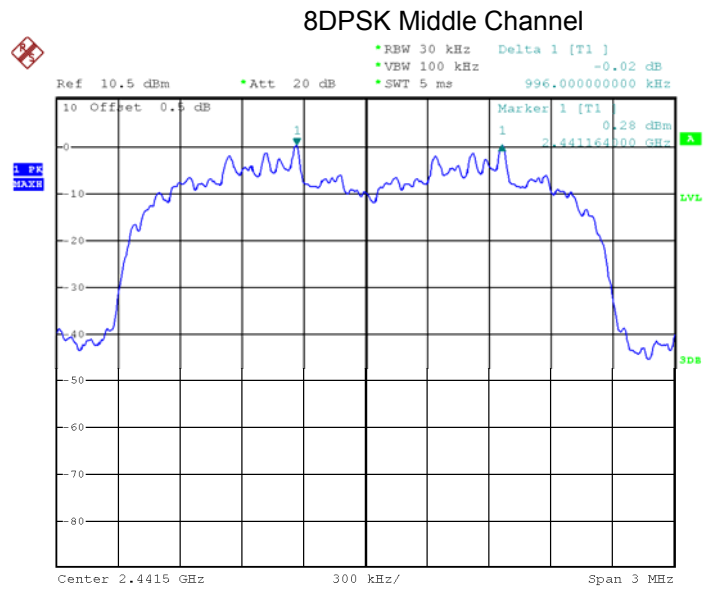

Date: 11.JUL.2018 00:58:59

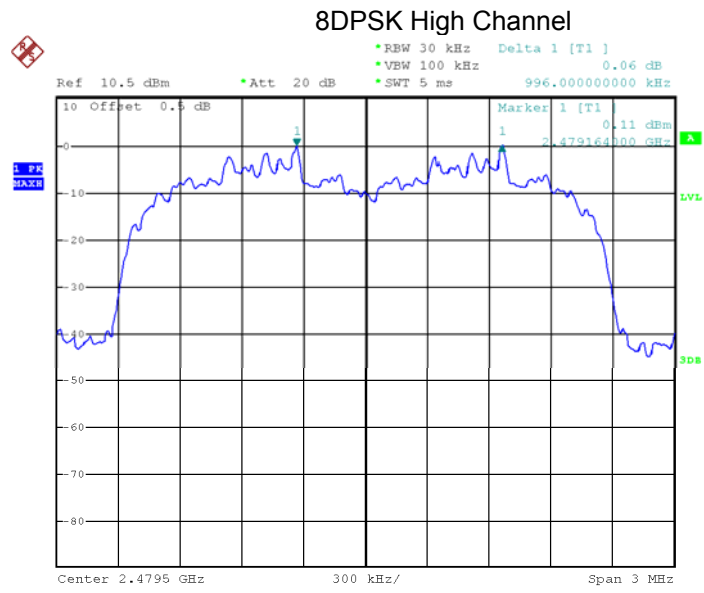

Date: 11.JUL.2018 00:59:56

15 Number of Hopping Frequency

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.


15.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


15.2 Test Result

Test Plots:


79 Channels in total

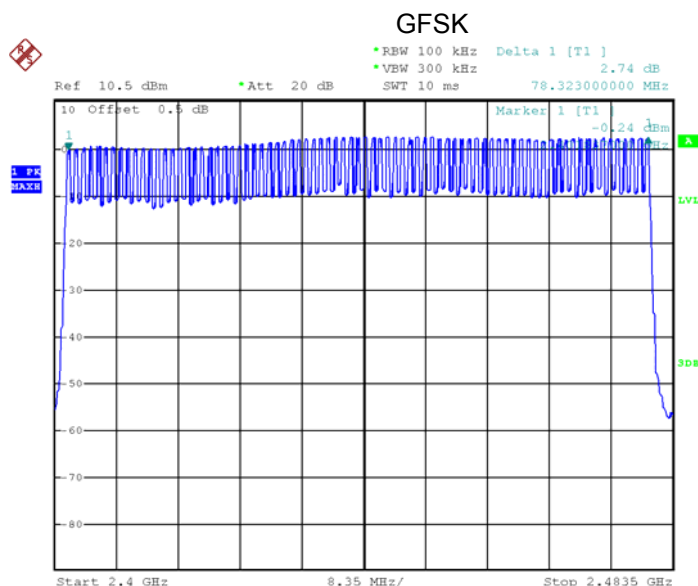

Date: 11.JUL.2018 01:54:00

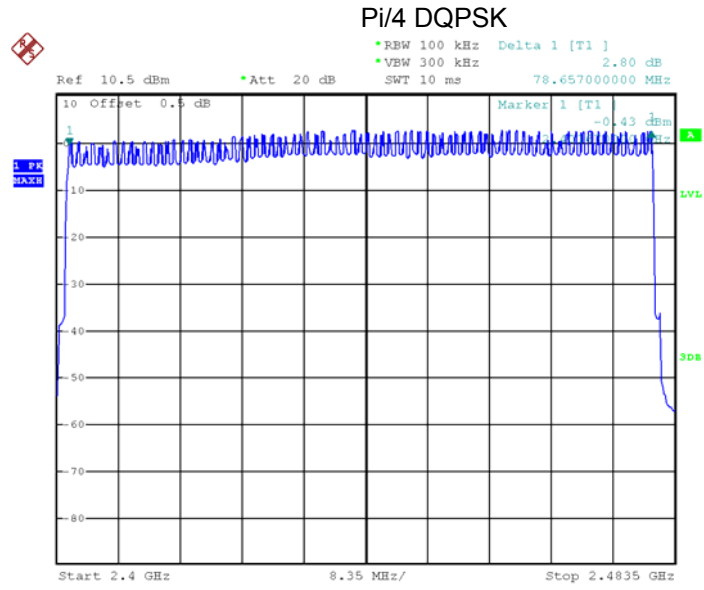

Date: 11.JUL.2018 01:26:29

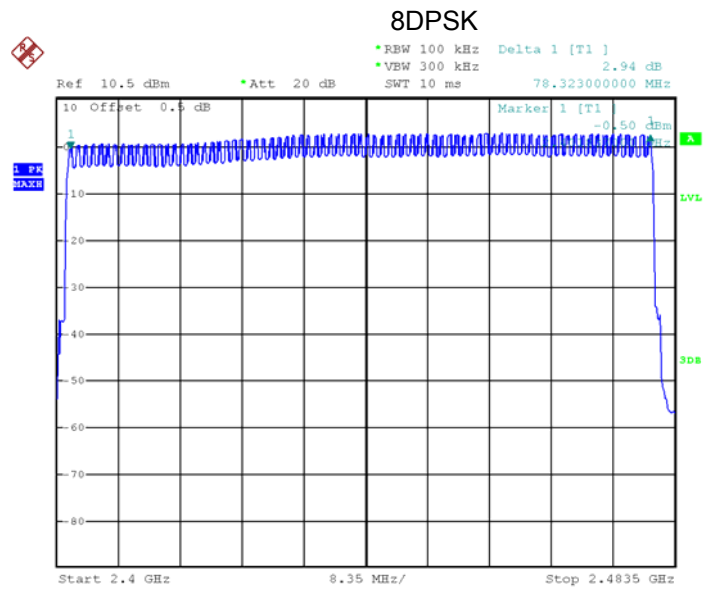

Date: 11.JUL.2018 00:49:20

16 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

16.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

16.2 Test Result

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).


DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

Data Packet	Dwell Time(s)
DH5	$1600/79/6*0.4*79*(MkrDelta)/1000$
DH3	$1600/79/4*0.4*79*(MkrDelta)/1000$
DH1	$1600/79/2*0.4*79*(MkrDelta)/1000$
Remark: Mkr Delta is once pulse time.	

Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.880	0.307	0.4
		middle	2.880	0.307	0.4
		High	2.880	0.307	0.4
Pi/4DQPSK	DH5	Low	2.870	0.306	0.4
		middle	2.870	0.306	0.4
		High	2.870	0.306	0.4
8DPSK	DH5	Low	2.880	0.307	0.4
		middle	2.880	0.307	0.4
		High	2.880	0.307	0.4


Remark: Only the worst-case mode DH5 is recorded.

Test Plots GFSK DH5 Low Channel

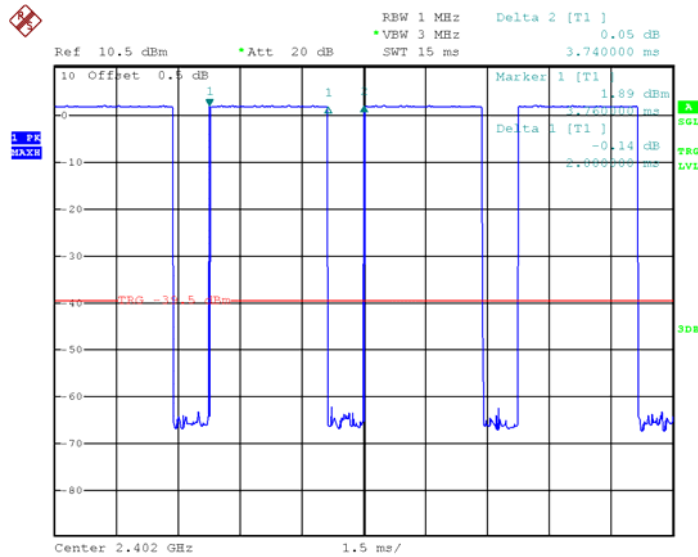


Date: 10.JUL.2018 21:53:47

GFSK DH5 Middle Channel

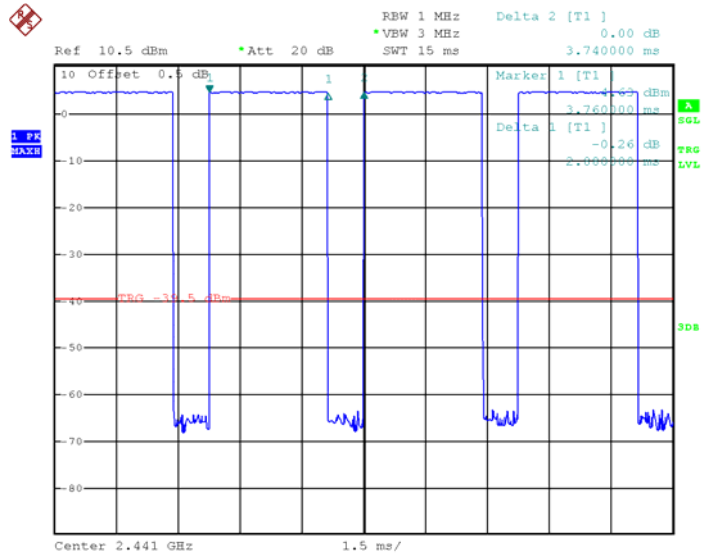


Date: 10.JUL.2018 21:54:09

GFSK DH5 High Channel

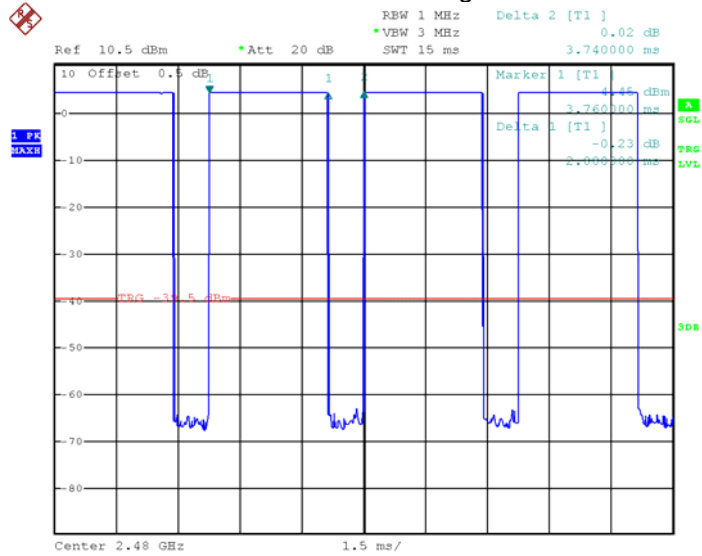


Date: 10.JUL.2018 21:54:28

Pi/4DQPSK DH5 Low Channel

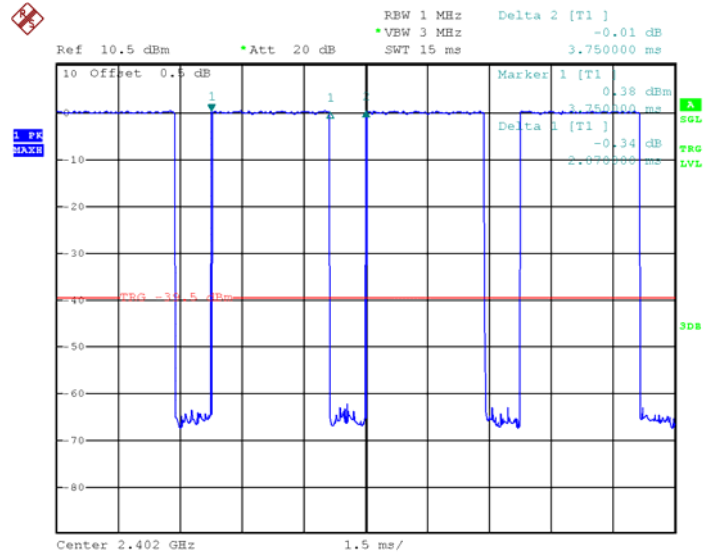


Date: 10.JUL.2018 23:06:28


Pi/4DQPSK DH5 Middle Channel

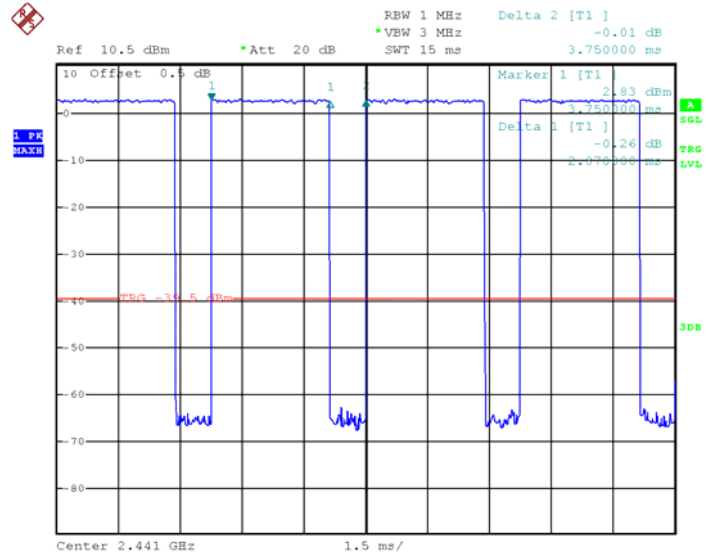

Date: 10.JUL.2018 23:06:49

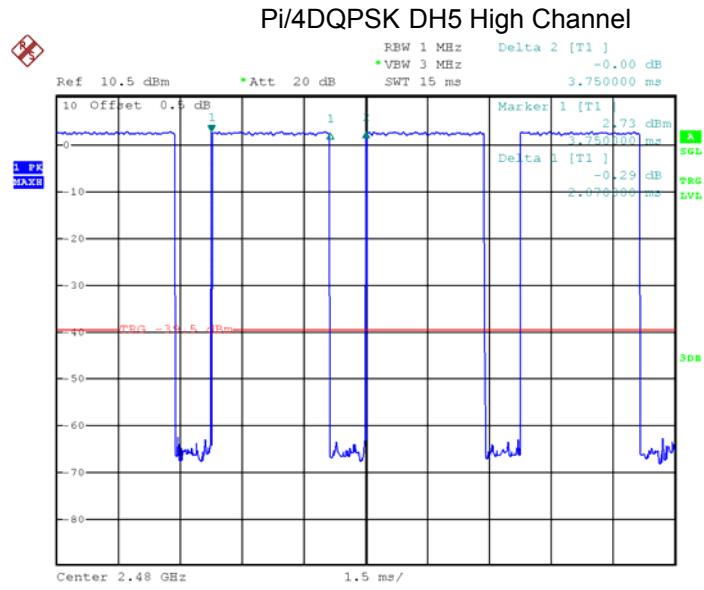


Date: 10.JUL.2018 23:07:08

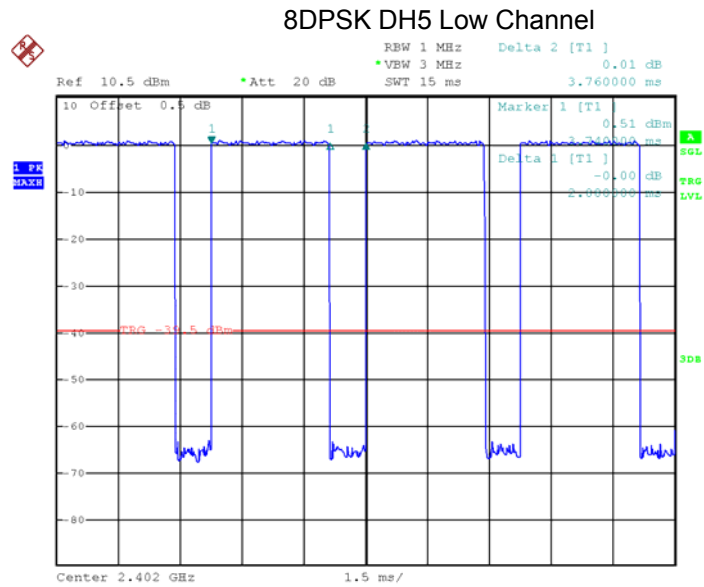


Date: 11.JUL.2018 01:02:10

8DPSK DH5 Middle Channel

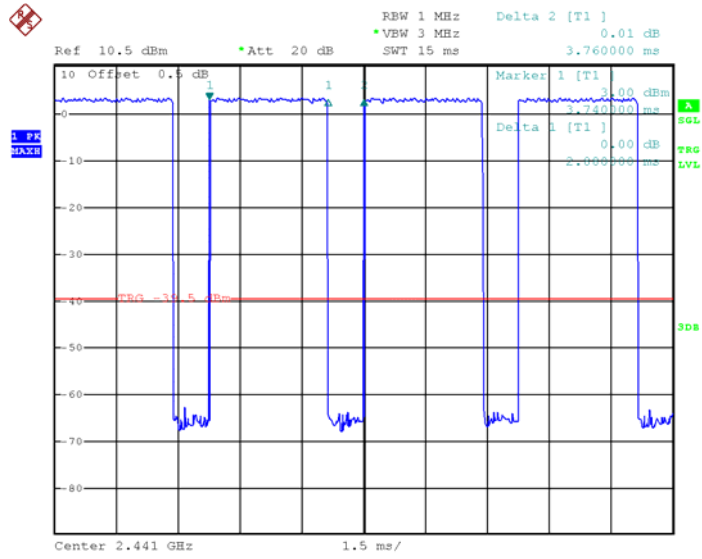

Date: 11.JUL.2018 01:01:50

8DPSK DH5 High Channel

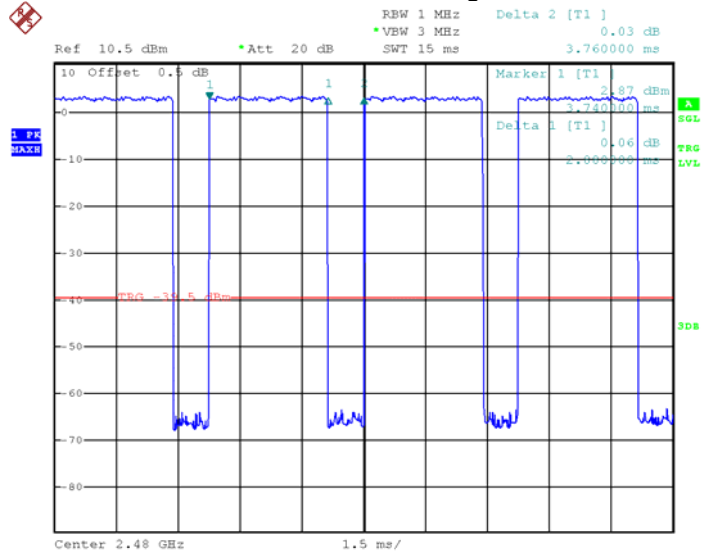

Date: 11.JUL.2018 01:01:19

17 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna, fulfil the requirement of this section.

18 RF Exposure

Remark: refer to SAR test report: WTS18S07116776-1W.

19 Photographs of test setup and EUT.

Note: Please refer to appendix: WTS18S07116776W_Photo.

=====**End of Report**=====