


2-3. VSWR ,Efficiency ,Matching and Active Data :

2-3.1 VSWR:

Frequency Band	1575	2400	2500	5150	5950
2-3-1. Typical Value:	≤ 2	≤ 2.5	≤ 2	≤ 2	≤ 3

2-3-2 Measuring Method	<ol style="list-style-type: none"> 1. A 50Ω coaxial cable is connected to the fpcb antenna. Then this cable is connected to a network analyzer to measure the VSWR. 2. Keeping this jig away from metal at least 20 cm.
------------------------	---

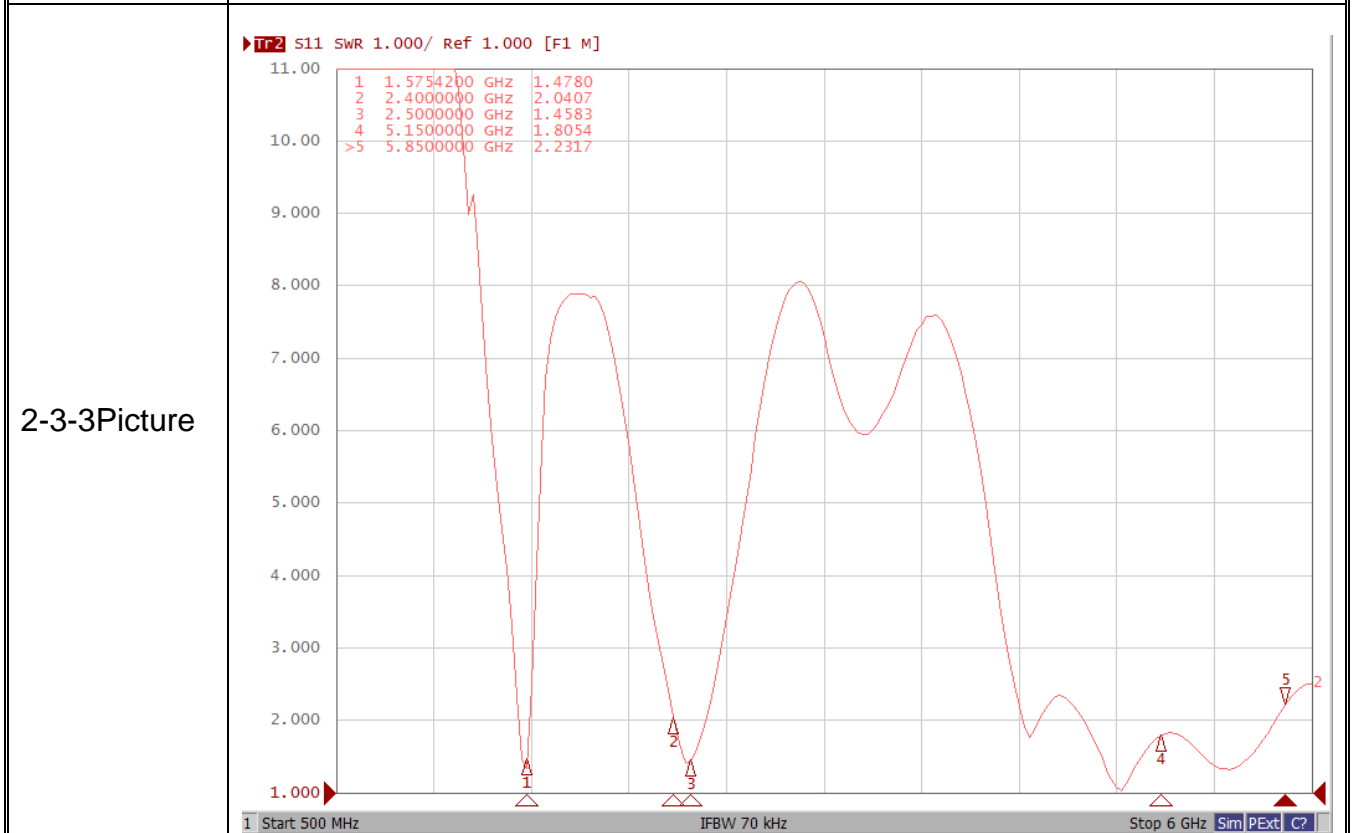

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±

SCALE :

UNIT : mm

DRAWN BY : 黄土勇

CHECKED BY : 肖坤雄

DESIGNED BY : 骆业辉

APPROVED BY : 王伟

TITLE : GH6321-4IN1ANT-V2.0Specification



深圳市可信华成通信科技有限公司

SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT NO.


PAGE REV.
A0

2-4-3 Antenna OTA


2-4-4 Antenna Efficiency

GPS				2.4G WIFI				5G WIFI			
Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)	Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)	Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
1550	1.77	-4.63	34%	2400	2.15	-4.67	34%	5150	2.29	-4.66	34%
1555	2.02	-4.38	36%	2410	2.43	-4.55	35%	5200	2.62	-4.72	34%
1560	1.97	-4.35	37%	2420	3.07	-4.18	38%	5250	2.16	-5.06	31%
1565	1.63	-4.49	36%	2430	2.79	-4.27	37%	5300	2.39	-5.15	31%
1570	1.41	-4.50	35%	2440	2.77	-4.31	37%	5350	2.78	-5.24	30%
1575	1.18	-4.54	35%	2450	3.30	-3.99	40%	5400	2.18	-5.44	29%
1580	0.87	-4.73	34%	2460	3.15	-4.01	40%	5450	1.42	-5.74	27%
1585	0.49	-4.97	32%	2470	2.89	-4.21	38%	5500	1.86	-5.76	27%
1590	0.15	-5.14	31%	2480	3.11	-4.13	39%	5550	1.35	-6.12	24%
1595	-0.32	-5.50	28%	2490	3.02	-4.19	38%	5600	0.81	-6.31	23%
1600	-0.89	-5.90	26%	2500	2.59	-4.63	34%	5650	1.01	-6.37	23%
								5700	-0.08	-7.15	19%
								5750	-1.21	-6.95	20%
								5800	0.23	-6.09	25%
								5850	-0.90	-7.44	18%


3. 3D Radiation Pattern

UNLESS OTHER SPECIFIED TOLERANCES ON :		 深圳市可信华成通信科技有限公司 SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD
X=±2	X.X=±0.1 X.XX=±0.05	
ANGLES=±		THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
HOLEDIA=±		
SCALE :	UNIT : mm	DOCUMENT NO. PAGE REV. A0
DRAWN BY : 黄土勇	CHECKED BY : 肖坤雄	
DESIGNED BY : 骆业辉	APPROVED BY : 王伟	
TITLE : GH6321-4IN1ANT-V2.0Specification		


GPS [1575MHz]

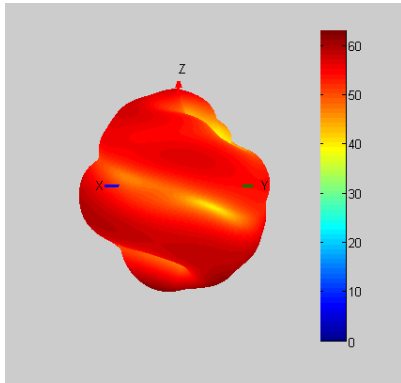


BT/WiFi 2.4GHz C0 [2400MHz]

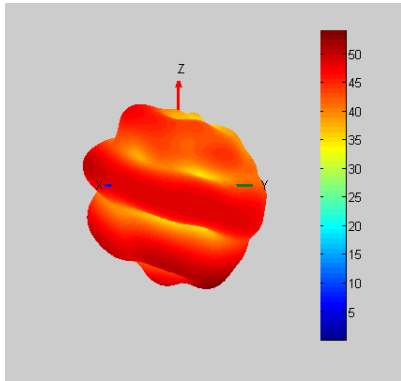


BT/WiFi 2.4GHz C0 [2500MHz]

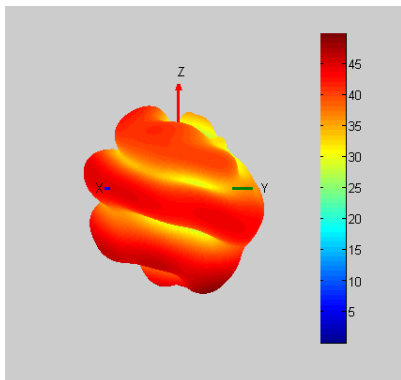


UNLESS OTHER SPECIFIED TOLERANCES ON : X=±2 X.X=±0.1 X.XX=±0.05 ANGLES=± HOLEDIA=±		 深圳市可信华成通信科技有限公司 SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY : 黄土勇	CHECKED BY : 肖坤雄		
DESIGNED BY : 骆业辉	APPROVED BY : 王伟		
TITLE : GH6321-4IN1ANT-V2.0Specification		DOCUMENT NO.	PAGE REV. A0

WiFi 5GHz [5150MHz]

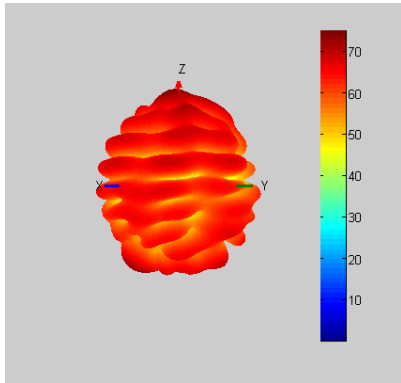

WiFi 5GHz [5850MHz]

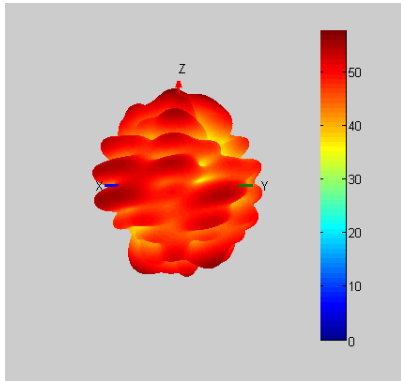

4. Antenna Dimensions:

UNLESS OTHER SPECIFIED TOLERANCES ON :		 深圳市可信华成通信科技有限公司 SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD
X=±2 X.X=±0.1 X.XX=±0.05 ANGLES=± HOLEDIA=±		
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DRAWN BY : 黄土勇	CHECKED BY : 肖坤雄	
DESIGNED BY : 骆业辉	APPROVED BY : 王伟	
TITLE : <u>GH6321-4IN1ANT-V2.0</u> Specification		DOCUMENT NO. PAGE REV. A0

