



Confirmation of Material

Supplier: Shenzhen Fubang Wireless
Technology Co. , Ltd.

Model NO: K6522Q4HX

Product Name: Lower main antenna

Spec/Type: _____

Material code: 01.02.05.02.16522.002

Colour: Black

Address: 3/F, Building 1, Dalang Joint
Construction Science and Technology
Industrial Park, Longhua District,
Shenzhen City


Contacts/phone: Zhang Haiyan 13691727201

Index


1. Specifications	3
2. Electric specifications	3
2-1 Matching circuit diagram	3
3. VSWR Testing	3
3-1 Testing connection	3
3-2 VSWR	3
3-3 Testing data	4
4. Test the efficiency of the antenna	4
4-1 Testing field	4
4-2 Testing results	4
4-3 Active testing	4
5. Environmental treatment	5
6. Engineering Draw	6
7. Measurement Report	7
8. Reliability Test Report	8
9. QC Engineering Chart	9
10. Gold thick Test Teport	10
11. Packing Specification	11

1、 Specification

This report mainly provides the testing conditions of various electric and structural performance parameters for cell phone antenna ----K6522Q4HX Picture 1 shows the antenna designed by FUBANG.

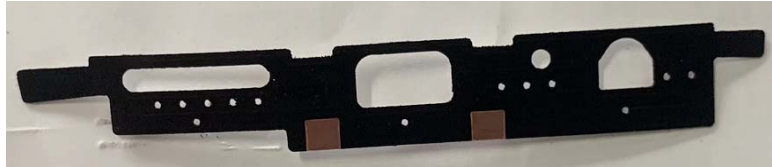

2 、 Matching circuit diagram

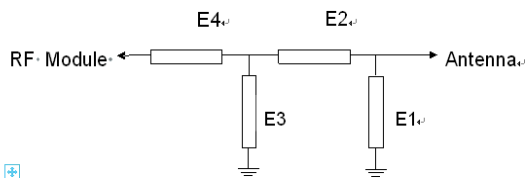

Element	Value
E1(0402)	5.1nh
E2(0402)	0 Ω
E3(0402)	
E4(0402)	0 Ω
Note: 公共端 12nh,RF1=0 Ω,RF2=6.8nh,RF3=27nh, FF4=NC	

3、 VSWR Testing

3.1 Testing connection

The VSWR testing devices are connected in sequence: Agilent5071C Network Analyzer → Testing Cable → Customer-providing Devices.

3.2 VSWR

The following table expresses the VSWR value of antenna's two edges of its frequency range. With regard to the relevant diagram of VSWR

3.3 Testing data



K6522Q4HX DANT VSWR/Return Loss

Main antenna VSWR									
Freq(MHz)	824	894	1710	1990	2170	2300	2400	2500	2700
Free Space	4.13	2.15	2.63	3.45	3.09	1.22	1.65	2.05	1.97

4、 Test the efficiency of the antenna Testing

4.1 Testing field

LR Microwave Anechoic Chamber : testing frequency ranges from 400MHz to 6GHz and the 40cm diameter spherical quiet zone, the chamber provides less than -90dB reflectivity from 400MHz—6GHz.

4.2 Testing results


The following table indicates the testing results related to Power and Sensitivity in Microwave Anechoic Chamber, concerning the relative diagram.

Band	TRP			TIS
GSM850	26.98	27.37	27.27	-102.98
GSM900	25.5	25.78	25.57	-102.88
DCS1800	25.52	25.11	25.17	-107.33
PCS1900	27	27.03	26.81	-106.53
W1	19.57	19.36	19.39	-106.41
W2	19.36	19.23	19.37	-109.7
W4	17.45	17.65	17.86	-107.55
W5	16.65	16.41	16.26	-106.85
W8	15.8	15.7	15.9	-106.86
1	20.17	20	19.95	-96.05
2	19.94	19.9	19.97	-97.44
4	18.33	18.51	18.75	-96.72
5	17.73	17.75	17.62	-93.94
7	19.93	19.89	19.59	-94.85
8	15.95	16.08	16.02	-94.01
12	14.73	14.99	15.16	-92.62
13	16.05	16.13	15.76	-96.04
28	16.48	16.61	16.94	-92.76
66	16.73	16.45	15.47	-91.56

Antenna Gain

Band	Gain (dBi)
------	------------


GSM850	-2.8
GSM900	-2.8
DCS1800	-2.4
PCS1900	-2.2
W1	-2.1
W2	-2.2
W4	-2.5
W5	-2.8
W8	-2.8
1	-2.1
2	-2.2
4	-2.5
5	-2.8
7	-2.3
8	-2.8
12	-3.0
13	-3.0
28	-3.0
66	-2.5

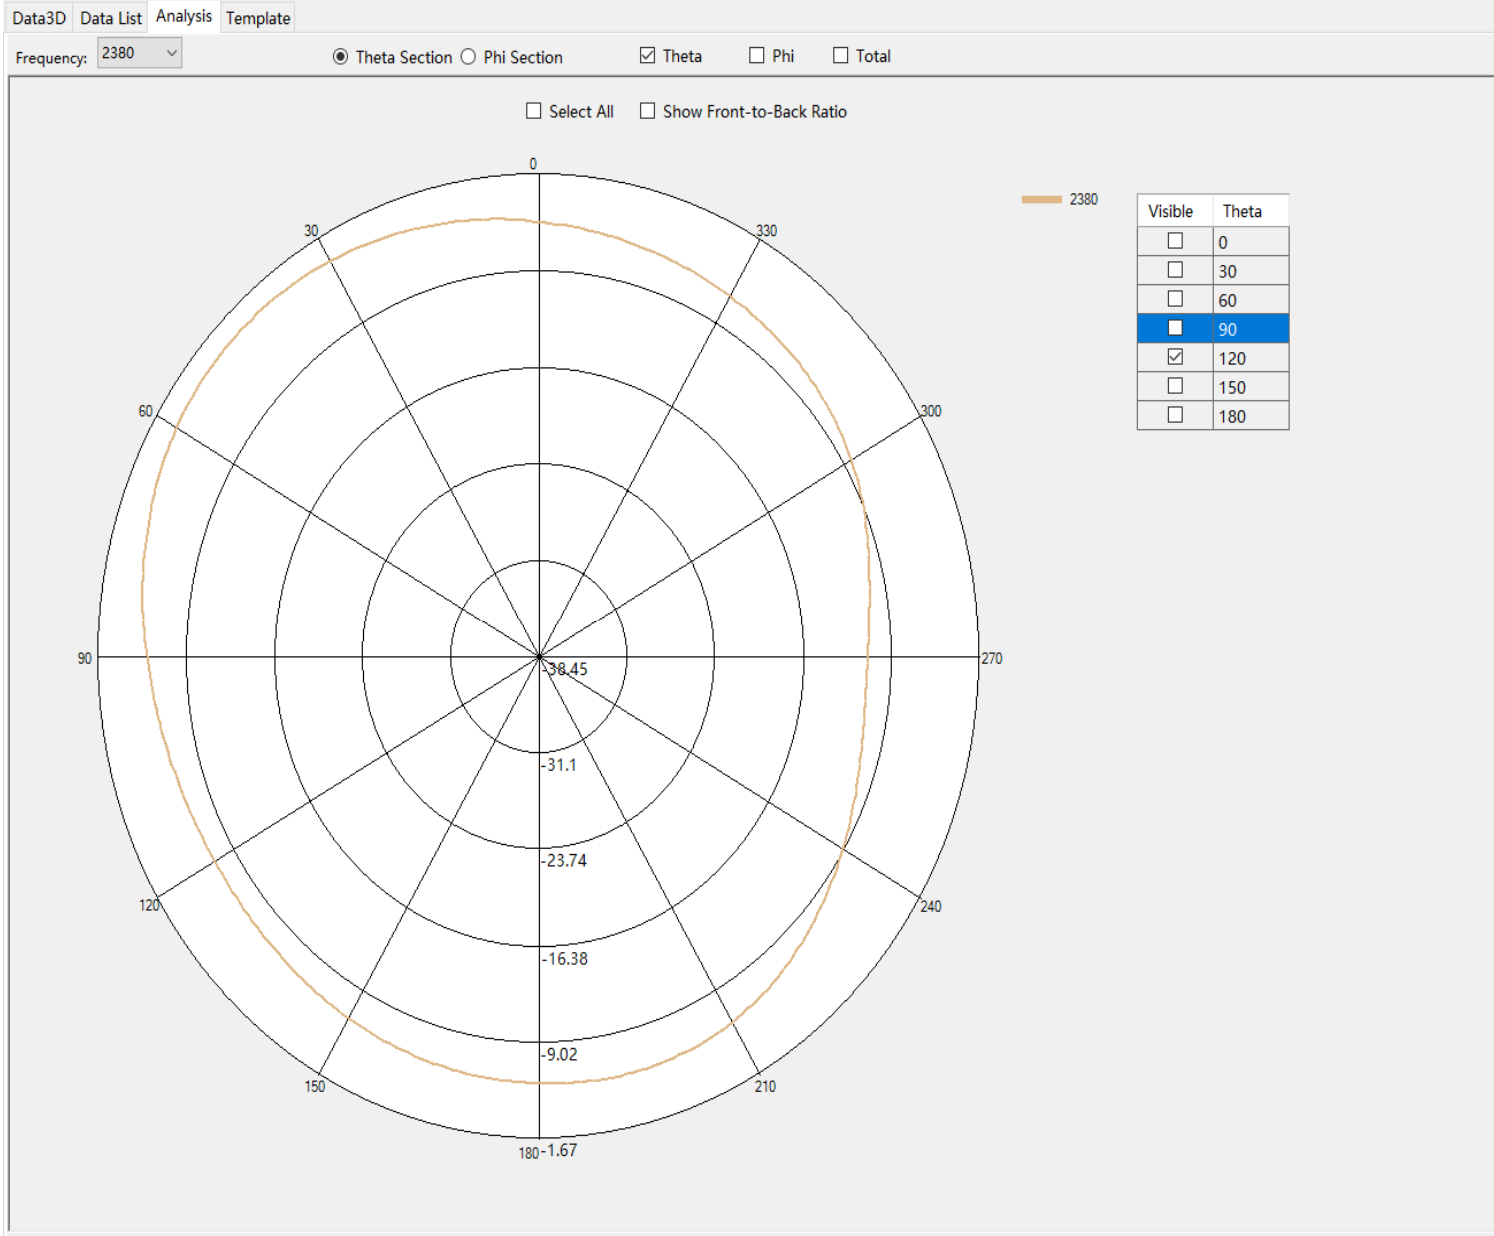

5、 Environmental treatment

Environment handling of the original machine.

6.Engineering Draw

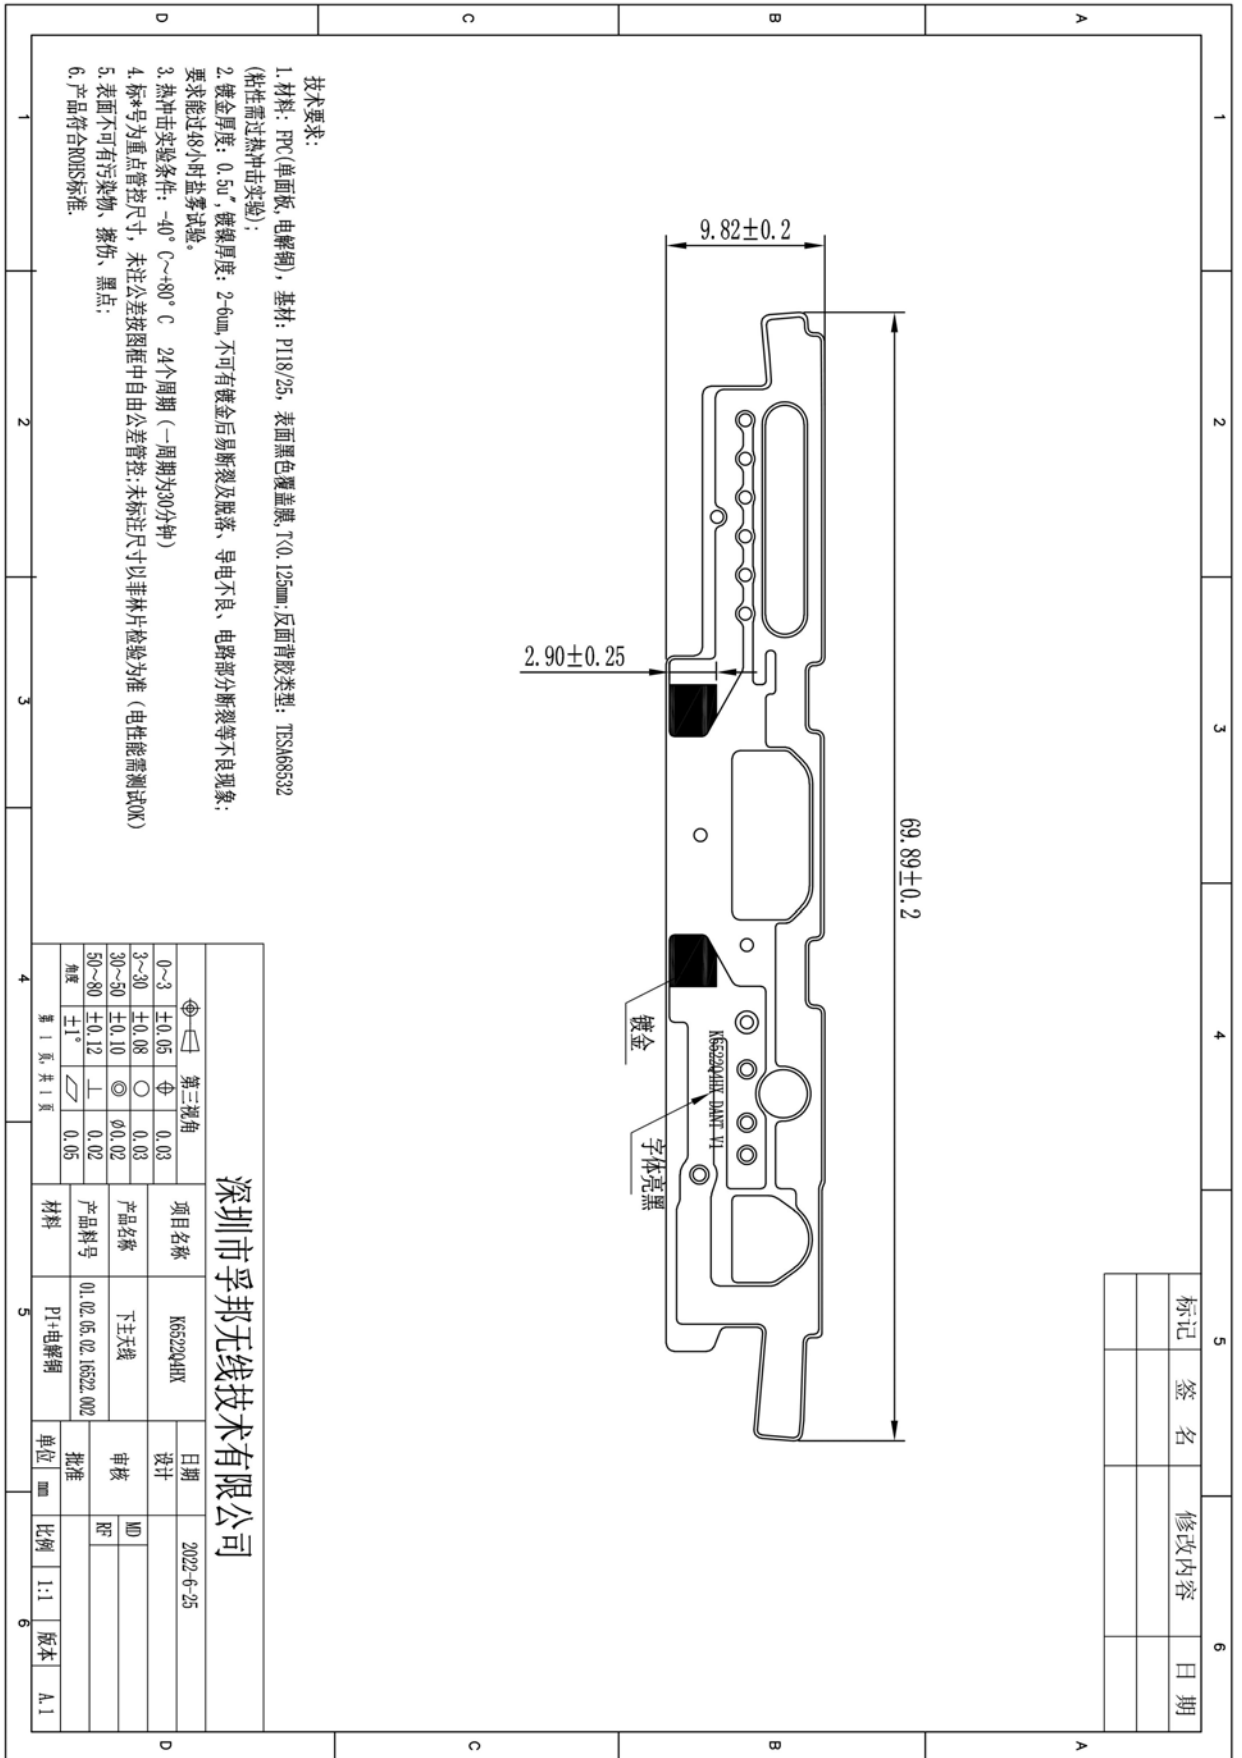

7.Measurement Report

深圳市孚邦无线技术有限公司
 SHENZHEN FUBANG Electronic TECHNOLOGY CO., LTD
全尺寸检测报告

报告编号:FUBQA20220629034

2022年6月29日

品名 Product name	K6522Q4HX 下主天线	订单号 Order NO.		类别 Category	<input type="checkbox"/> 模具零件 <input type="checkbox"/> 材料评估 <input checked="" type="checkbox"/> 送样评估 <input type="checkbox"/> 其他							
料号 Serial No	01.02.05.02.16522.002	批 量 Batch	5PCS									
序号 Number	图面规格 Specifications	量具 Tool	测试结果 Test results							判定Result		备注Remark
			1#	2#	3#	4#	5#	6#	7#	OK	NG	
1	69.89±0.20	P	69.93	69.86	69.90	69.88	69.85			OK		
2	9.82±0.20	P	9.76	9.82	9.80	9.83	9.78			OK		
3	2.9±0.25	P	3.05	3.02	3.07	2.98	2.97			OK		
	以下空白											
量具代号 Code	卡尺 C 千分尺 M 投影仪(二次元) P 钢尺 S									最终判定 Final results		
										OK		
备注 Remarks												

FUB-4-PG-062/A.1

核准:

审核:

检验员: Wind

8. Reliability Test Report

深圳市孚邦无线技术有限公司
SHENZHEN FUBANG ANTENNA TECHNOLOGY CO., LTD
盐水喷雾试验报告
salt spray test report

报告编号:FUBQA220629086

日期:6月29日

产品名称 Product name	K6522Q4HX 下主天线	送检部门 Inspection department	研发	料号 Serial No	01.02.05.02.16522.002	试样数量 Qty	5	
试验日期 Date	4月27日	试验时间 Test time	48H	开始START	4月27日10:00	客户Customer		
				结束OVER	4月29日10:00	供应商Supplier	/	
试验条件 Condition	项目 Item			标准 Standard		实测Actually measure		条件判定 Judge
						MAX	MIN	
	试验前产品清洗 Test before cleaning products			GB/T2423.17-2006		用清水清洗		OK
	产品放置方法 Location mode			GB/T2423.17-2006		15° ~30°		OK
	压缩空气动力 Compressed air power			(1.0±0.1)Kgf/cm		1.1	0.9	OK
	实验室温度 Laboratory temperature			35±1℃		36℃	34℃	OK
	实验室相对湿度 Test chamber relative humidity			85%RH		/		OK
	环境温度 Environment temperature			常温		/		OK
	压力桶温度 The pressure barrel temperature			47±1℃		48℃	46℃	OK
	盐水桶温度 Brine house temperature			35±2℃		37℃	33℃	OK
	盐水浓度 Brine density			1:20(5±1)%		5% NaCL溶液		OK
	盐雾沉降量 Spray volume			1~2ml/H/80cm²		1.7	1.4	OK
	NaCL品质 NaCL			工业盐		建新氯化钠		OK
	蒸馏水品质 Distilled water			饮用纯净水		纯净水		OK
其它 Other			/		/		OK	
试验结果 Experiment a result	白色腐蚀率			GB/T6461-02		无		OK
	样件试验后的外观			GB/T6461-02		/		OK
说明: 1. 盐雾试验作业标准依照中华人民共和国国家标准 GB/T2423.17-2006执行. 2. 试件外观判定标准依照中华人民共和国国家标准GB/T6461-02标准执行. 3. 判定方法: 试样表面白色腐蚀率为0%为保护级别10级; 白色腐蚀率为0~0.1% 为保护级别9级; 白色腐蚀率为0.1%~0.25%为保护级别8级				Explain: 1.Salt fog experiments homework standard according to the People's Republic of China national standard GB/T2423.17-2006 performances. 2.Judge standard according to the People's Republic of China national standard GB/T6461-02 standard a performance. 3.Judge a method:Try the kind surface white corrosion rate as 0% for protect Class 10 classes;The white corrosion rate is 0~0.1% is protect Class 9 classes;The white corrosion rate is 0.1% ~ 0.25% is to protect Class 8 classes				
批准 Grant			审核 Examine			试验员Test clerk		
刘丽萍			刘丽萍			Wind		

FUB-4-PG-051/A.1

9.QC Engineering Chart

QC Engineering Chart

Customer(客户)		酷比		付仁松		Orig. Date(制作日期)		2020.12.27		
Description(零件名称)		FPC天线		杨文杰		Revised Date(校订日期)		2020.12.27		
流程编号 Process Number		流程名称 Process Name <td colspan="2">莫思远</td> <td colspan="2">Approved Date(确认日期)</td> <td colspan="2">2020.12.27</td>		莫思远		Approved Date(确认日期)		2020.12.27		
制程描述 Process		产品 Product		检验方式 check mode		判定标准 Evaluation standard		担当 Inspector		
控制项目 control item		控制项目 control item		频率Freq		检验方法 Check method		记录 Record		
Approved By(校订)		Approved By(确认)								
1	IQC	来料检验 Incoming inspection	成品 finish goods	外观Appearance、颜色Color、材质Materials、版本Version	Batch inspection, RestrainingGB2828-2003 General II level, AQL: CR=0, MAJ=0.4, MIN=1.0Sampling	每批 Each Batch	目检Visual inspection, 依据《FPC检验标准》Basis《FPC Inspection standard》《零件图纸》《Part drawing》	《FPC检验标准》《FPC Inspection standard》《零件图纸》《Part drawing》《材质证明》《Material Certification》	IQC	IQC Test Report
				尺寸 Size	5PCS	每批 Each Batch	二次元进行量测 The quadratic element is measured	《零件图纸》《Part drawing》	IQC	IQC Test Report
				ROHS符合性 ROHS Conformity	标识全检labeling full inspection	每批 Each Batch	每个包装是否贴有环保标识? 标识是否符合要求? Is there an environmental label on each package? Does the logo meet the requirements?	《FPC检验标准》《FPC Inspection standard》《零件图纸》《Part drawing》《材质证明》《Material Certification》	IQC	IQC Test Report
				ROHS符合性 ROHS Conformity	标识全检labeling full inspection	每批 Each Batch	用直尺量测量相应尺寸/安装Use ruler to measure corresponding dimension/actual	《零件图纸》《Part drawing》	IQC	IQC Test Report
				ROHS符合性 ROHS Conformity	标识全检labeling full inspection	每批 Each Batch	每个包装是否贴有环保标识? 标识是否符合要求? Is there an environmental label on each package? Does the logo meet the requirements?	《零件图纸》《Part drawing》	IQC	IQC Test Report
				ROHS符合性 ROHS Conformity	标识全检labeling full inspection	每批 Each Batch	目检Visual inspection, 依据《FPC检验标准》Basis《FPC Inspection standard》《零件图纸》《Part drawing》	《FPC检验标准》《FPC Inspection standard》《零件图纸》《Part drawing》《材质证明》《Material Certification》	IQC	IQC Test Report
				ROHS符合性 ROHS Conformity	标识全检labeling full inspection	每批 Each Batch	每个包装是否贴有环保标识? 标识是否符合要求? Is there an environmental label on each package? Does the logo meet the requirements?	《零件图纸》《Part drawing》	IQC	IQC Test Report
				ROHS符合性 ROHS Conformity	标识全检labeling full inspection	每批 Each Batch	用直尺量测量相应尺寸/安装Use ruler to measure corresponding dimension/actual	《零件图纸》《Part drawing》	IQC	IQC Test Report
				ROHS符合性 ROHS Conformity	标识全检labeling full inspection	每批 Each Batch	每个包装是否贴有环保标识? 标识是否符合要求? Is there an environmental label on each package? Does the logo meet the requirements?	《零件图纸》《Part drawing》	IQC	IQC Test Report
				ROHS符合性 ROHS Conformity	标识全检labeling full inspection	每批 Each Batch	目检Visual inspection, 依据《FPC检验标准》Basis《FPC Inspection standard》《零件图纸》《Part drawing》	《FPC检验标准》《FPC Inspection standard》《零件图纸》《Part drawing》《材质证明》《Material Certification》	IQC	IQC Test Report
2	FQC	外观检验 外观检查	成品 finish goods	外观Appearance	Batch inspection, RestrainingGB2828-2003 General II level, AQL: CR=0, MAJ=0.4, MIN=1.0Sampling	每批 Each Batch	Visual inspection, Basis《Specification for product packaging identification》&《BOM》	《FPC检验标准》《FPC Inspection standard》《零件图纸》《Part drawing》《材质证明》《Material Certification》	FQC	FQC Test
				包装标识 Package label	全检full inspection	每批 Each Batch	Visual inspection, Basis《Specification for product packaging identification》&《BOM》	《FPC检验标准》《FPC Inspection standard》《零件图纸》《Part drawing》《材质证明》《Material Certification》	FQC	FQC Test
				重点尺寸 Important Size	5PCS	每批 Each Batch	二次元进行量测 The quadratic element is measured	《成品外观图》《Exterior drawing of finished product》	FQC	FQC Test
3	OQC	出货检验 Outgoing inspection	成品 finish goods	外观Appearance	Batch inspection, RestrainingGB2828-2003 General II level, AQL: CR=0, MAJ=0.4, MIN=1.0Sampling	每批 Each Batch	Visual inspection, Basis《Specification for product packaging identification》	《FPC检验标准》《FPC Inspection standard》	OQC	OQC Test Report
				重点尺寸 Important Size	5PCS	每批 Each Batch	二次元进行量测 The quadratic element is measured	《成品外观图》《Exterior drawing of finished product》	OQC	OQC Test Report
				ROHS符合性 ROHS Conformity	标识全检labeling full inspection	每批 Each Batch	每个包装是否贴有环保标识? 标识是否符合要求? Is there an environmental label on each package? Does the logo meet the requirements?	《成品外观图》《Exterior drawing of finished product》	OQC	OQC Test Report

10.Gold thick Test Report

深圳市孚邦无线技术有限公司
 SHENZHEN FUBANG Electronic TECHNOLOGY CO., LTD

镀金厚度检验报告
 Gold thick test report

报告编号: FUBQA220629088

日期: 6月29日

品名 Product name	K6522Q4HX 下主天线				料号 Serial No	01.02.05.02.16522.002					批 量 Batch	SPCS
厚度标准	AU: 0.5um, NI: 50-150um											
序号 Number	测试结果 Test results											备注 Remark
	CU um					NI um						
1	1#	2#	3#	4#	5#	1#	2#	3#	4#	5#		
	0.55	0.53	0.57	0.54	0.51	112.16	105.43	115.34	108.53	117.5		
以下空白												
量具代号 Code	牛津仪器 SmartLink											最终判定
备注 Remarks												OK


FUB-4-PG-067/A.1

核准: 刘丽萍

审核: 刘丽萍

检验员: Wind

11.Packing Specification

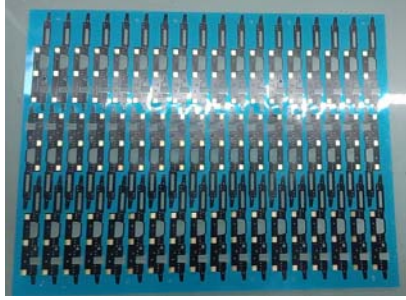

用 PE 膜打包
with PE film packaging



防潮防水 PET 袋封装
Moistureproof waterproof PET
bag packaging



放于纸箱内
Put in the cartons



纸箱用胶带封口
Carton sealing with duct tape



包装箱整箱外观
Cases appearance