

# TEST REPORT

**Reference No.**..... : WTD22X05093708W001  
**FCC ID** ..... : 2AEPIBLACKG-2  
**Applicant** ..... : COLOMBIANA DE COMERCIO S.A.  
**Address**..... : Car. 43E No 8-71, Medellin, Colombia  
**Manufacturer** ..... COOSEA GROUP (HK) COMPANY LIMITED LIMITED  
**Address**..... UNIT 5-6,16F.,MULTIFIELD PLAZA 3-7A PRAT AVENUE TSIM SHA TSUI  
KL, HONG KONG  
**Product Name** ..... : CELLPHONE  
**Model No.**..... : Black G 2  
FCC Part 2.1093  
**Standards** ..... : IEEE Std C95.1: 2019  
IEEE Std C95.3: 2002 + Rev. 2008  
IEEE 1528:2013  
**Date of Receipt sample** .... : 2022-05-13  
**Date of Test**..... : 2022-05-16 to 2022-05-17  
**Date of Issue** ..... : 2022-05-17  
**Test Report Form No.** ..... : WTX\_IEEE\_1528\_2013W  
**Test Result**..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Jack Sun

Jack Sun

Approved by:

Silin Chen

Silin Chen

**TABLE OF CONTENTS**

**1. General Information .....4**  
 1.1 Product Description for Equipment Under Test (EUT) .....4  
 1.2 Test Standards .....7  
 1.3 Test Methodology .....7  
 1.4 Test Facility .....7

**2. Summary of Test Results .....8**

**3. Specific Absorption Rate (SAR).....9**  
 3.1 Introduction.....9  
 3.2 SAR Definition .....9

**4. SAR Measurement System .....10**  
 4.1 The Measurement System .....10  
 4.2 Probe .....10  
 4.3 Probe Calibration Process .....12  
 4.4 Phantom .....13  
 4.5 Device Holder .....13  
 4.6 Test Equipment List .....14

**5. Tissue Simulating Liquids .....15**  
 5.1 Composition of Tissue Simulating Liquid .....15  
 5.2 Tissue Dielectric Parameters for Head and Body Phantoms .....16  
 5.3 Tissue Calibration Result .....17

**6. SAR Measurement Evaluation .....18**  
 6.1 Purpose of System Performance Check .....18  
 6.2 System Setup .....18  
 6.3 Validation Results .....20

**7. EUT Testing Position .....21**  
 7.1 Define Two Imaginary Lines on The Handset .....21  
 7.2 Cheek Position .....22  
 7.3 Tilted Position .....22  
 7.4 Body Position .....23  
 7.5 EUT Antenna Position .....23  
 7.6 EUT Testing Position .....24

**8. SAR Measurement Procedures .....25**  
 8.1 Measurement Procedures .....25  
 8.2 Spatial Peak SAR Evaluation .....25  
 8.3 Area & Zoom Scan Procedures .....26  
 8.4 Volume Scan Procedures .....26  
 8.5 SAR Averaged Methods .....26  
 8.6 Power Drift Monitoring .....26

**9. SAR Test Result .....27**  
 9.1 Conducted RF Output Power .....27  
 9.2 Test Results for Standalone SAR Test .....45  
 9.3 Simultaneous Multi-band Transmission SAR Analysis .....58

**10. Measurement Uncertainty .....65**  
 10.1 Uncertainty for SAR Test .....65

**Annex A. Plots of System Performance Check .....67**  
**Annex B. Plots of SAR Measurement .....87**  
**Annex C. EUT Photos .....139**  
**Annex D. Test Setup Photos .....141**  
**Annex E. Calibration Certificate .....146**

**Report version**

Version No.	Date of issue	Description
Rev.00	2022-05-17	Original
/	/	/

## 1. General Information

---

### 1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT:	
Product Name:	CELLPHONE
Brand Name:	/
Model No.:	Black G 2
Adding Model(s):	/
Rated Voltage:	DC 3.87V
Battery:	4900mAh
Software Version:	/
Hardware Version:	/
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

<b>Technical Characteristics of EUT:</b>	
<b>2G</b>	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS/EDGE 850: 869~894MHz GSM/GPRS/EDGE 1900: 1930~1990MHz
RF Output Power:	GSM850: 33.08dBm, GSM1900: 30.22dBm EDGE850: 27.56dBm, EDGE1900: 25.66dBm
Type of Modulation:	GMSK, 8PSK
Type of Antenna:	Integral Antenna
Antenna Gain:	GSM850: -2.1dBi; GSM1900: -1.8dBi
GPRS/EDGE Class:	Class 12
<b>3G</b>	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 22.84dBm, WCDMA Band 5: 22.74dBm
Type of Modulation:	BPSK
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 2: -1.8dBi, WCDMA Band 5: -2.1dBi
<b>4G</b>	
Support Networks:	FDD-LTE
Support Band:	FDD-LTE Band 4, 7
Uplink Frequency:	FDD-LTE Band 4: Tx: 1710-1755MHz, FDD-LTE Band 7: Tx: 2500-2570MHz,
Downlink Frequency:	FDD-LTE Band 4: Rx: 2110-2155MHz, FDD-LTE Band 7: Rx: 2620-2690MHz,
RF Output Power:	FDD-LTE Band 4: 23.36dBm, FDD-LTE Band 7: 23.19dBm,
Type of Modulation:	QPSK, 16QAM
Antenna Type:	Integral Antenna
Antenna Gain:	FDD-LTE Band 4: -1.7dBi, FDD-LTE Band 7: -1.8dBi,
<b>WIFI(2.4GHz)</b>	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 11b/g/n(HT20)

RF Output Power:	20.19dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Quantity of Channels:	11 for 802.11b/g/n(HT20)
Channel Separation:	5MHz
Antenna Type:	Integral Antenna
Antenna Gain:	-1.2dBi
<b>Bluetooth</b>	
Bluetooth Version:	V5.0
Frequency Range:	2402-2480MHz
RF Output Power:	8.66dBm(Conducted)
Data Rate:	1Mbps, 2Mbps, 3Mbps
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Quantity of Channels:	79/40
Channel Separation:	1MHz/2MHz
Antenna Type:	Integral Antenna
Antenna Gain:	-1.2dBi
<b>WIFI(5GHz)</b>	
Support Standards:	802.11a, 802.11n-HT20/40, 802.11ac-HT20/40/80
Frequency Range:	Band 1: 5180-5240MHz, Band 2: 5260-5320MHz, Band 3: 5500-5700MHz, Band 4: 5745-5825MHz
RF Output Power:	16.35dBm(Conducted)
Type of Modulation:	BPSK, QPSK, 16QAM, 64QAM, 256-QAM
Type of Antenna:	Integral Antenna
Antenna Gain:	-1.5dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

## 1.2 Test Standards

The following report is prepared on behalf of the Fortune Ship International Industrial Limited in accordance with FCC 47 CFR Part 2.1093, IEEE Std C95.1: 2019, IEEE Std C95.3: 2002 + Rev. 2008, IEEE 1528:2013, KDB 447498 D01 v06, KDB 648474 D04 v01r03, KDB 248227 D01 v02r02, KDB 941225 D01 v03r01, KDB 941225 D05 v02r05 , and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02.

The objective is to determine compliance with FCC Part 2.1093 of the Federal Communication Commissions rules.

*Maintenance of compliance* is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02. The public notice KDB 447498 D01 v06 for Mobile and Portable Devices RF Exposure Procedure also.

## 1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,Block 70 Bao'an District, Shenzhen, Guangdong, China

### **FCC – Registration No.: 125990**

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010. Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 2. Summary of Test Results

---

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Head SAR	Body-worn (10mm Gap)	Hotspot (10mm Gap)	SAR <sub>1g</sub> Limit (W/kg)
	Maximum SAR <sub>1g</sub> (W/kg)	Maximum SAR <sub>1g</sub> (W/kg)	Maximum SAR <sub>1g</sub> (W/kg)	
GSM	0.486	0.713	<b>0.857</b>	1.6
WCDMA	0.276	0.766	0.766	1.6
LTE	0.168	<b>0.796</b>	0.796	1.6
WLAN 2.4GHz	0.702	0.416	0.416	1.6
WLAN 5GHz	<b>0.839</b>	0.640	0.640	1.6
Bluetooth	0.251	0.278	0.278	1.6
Simultaneous Transmission	1.313	1.436	<b>1.497</b>	1.6

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2.1093 and IEEE Std C95.1: 2019, and had been tested in accordance with the measurement methods and procedure specified in IEEE 1528:2013 and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02.



### 3. Specific Absorption Rate (SAR)

---

#### 3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

#### 3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left( \frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 4. SAR Measurement System

---

### 4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

### 4.2 Probe

For the measurements the Specific Dosimetric E-Field Probe SSE2 SN 45/15 EPGO280 with following specifications is used


- Dynamic range: 0.01-100 W/kg
- Probe Length: 330 mm
- Length of Individual Dipoles: 4.5 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter : 5 mm

Waltek Testing Group (Shenzhen) Co., Ltd.

[Http://www.waltek.com.cn](http://www.waltek.com.cn)

- Distance between dipoles / probe extremity: 2.7mm
- Probe linearity: <0.25 dB
- Axial Isotropy: <0.25 dB
- Spherical Isotropy: <0.50 dB
- Calibration range: 700 to 3000MHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with EN 62209-1 and IEEE 1528 STD, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 62209-1 annexe technique using reference guide at the five frequencies.

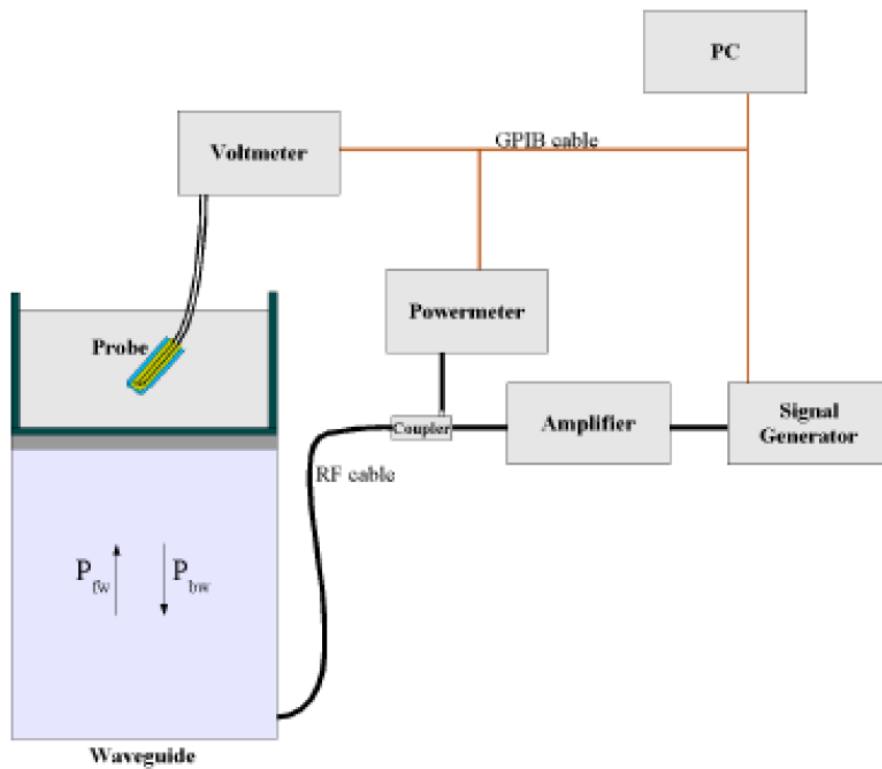

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-2z/\delta}$$

Where :

P<sub>fw</sub> = Forward Power

P<sub>bw</sub> = Backward Power

a and b = Waveguide dimensions

l = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

Waltek Testing Group (Shenzhen) Co., Ltd.

[Http://www.waltek.com.cn](http://www.waltek.com.cn)

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage  $V_{lin}(N)$  is obtained from the displayed output voltage  $V(N)$  using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

### 4.3 Probe Calibration Process

#### Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm<sup>2</sup>) using an with CALISAR, Antenna proprietary calibration system.

#### Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm<sup>2</sup>.

#### Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

$\Delta t$  = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

$\Delta T$  = temperature increase due to RF exposure.

SAR is proportional to  $\Delta T / \Delta t$ , the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

$\sigma$  = simulated tissue conductivity,


$\rho$  = Tissue density (1.25 g/cm<sup>3</sup> for brain tissue)

#### 4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

#### 4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 °.

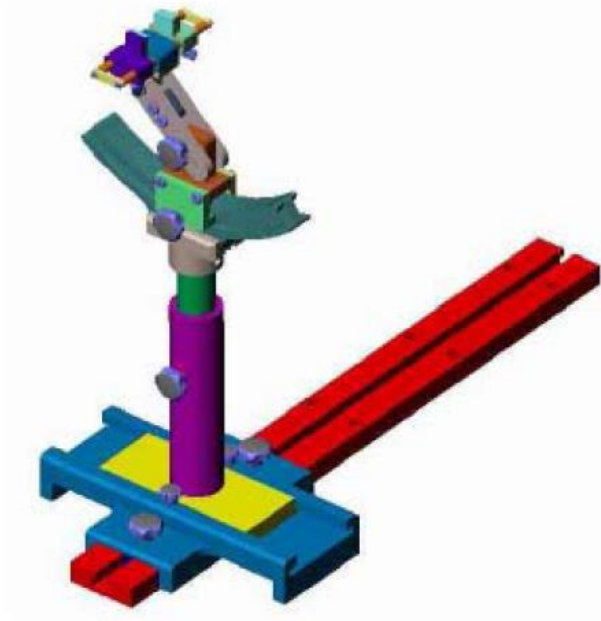

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005


**4.6 Test Equipment List**

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
E-Field Probe	MVG	SSE2	SN 18/21 EPGO356	2021-07-16	2022-07-15
750MHz Dipole	MVG	SID750	SN 47/12 DIP 0G750-203	2020-03-11	2023-03-10
835MHz Dipole	MVG	SID835	SN 47/12 DIP 0G835-204	2020-03-11	2023-03-10
900MHz Dipole	MVG	SID900	SN 47/12 DIP 0G900-205	2020-03-11	2023-03-10
1800MHz Dipole	MVG	SID1800	SN 47/12 DIP 1G800-206	2020-03-11	2023-03-10
1900MHz Dipole	MVG	SID1900	SN 47/12 DIP 1G900-207	2020-03-11	2023-03-10
2000MHz Dipole	MVG	SID2000	SN 47/12 DIP 2G000-208	2020-03-11	2023-03-10
2450MHz Dipole	MVG	SID2450	SN 13/15 DIP 2G450-364	2020-03-11	2023-03-10
2600MHz Dipole	MVG	SID2600	SN 28/21 DIP 2G600-590	2021-07-16	2024-07-15
5 GHz Dipole	MVG	SWG5500	SN 49/16 WGA45	2020-07-03	2023-07-02
Dielectric Probe	SATIMO	SCLMP	SN 47/12 OCPG49	2022-03-22	2023-03-21
SAM Phantom	SATIMO	SAM	SN/ 47/12 SAM95	N/A	N/A
Multi Meter	Keithley	Keithley 2000	4006367	2022-03-22	2023-03-21
Power meter	Keithley	3500	JC-2017-09-001	2022-03-22	2023-03-21
Power meter	Keithley	3500	JC-2017-09-001	2022-03-22	2023-03-21
Power Sensor	HP	11636B	JC-2017-10-002	2022-03-22	2023-03-21
MXG X-Series RF Vector Signal Generato	KEYSIGHT	N5182B	MY57300664	2022-03-22	2023-03-21
Universal Tester	Rohde & Schwarz	CMU200	112315	2022-03-22	2023-03-21
Universal Radio Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
Network Analyzer	HP	8753C	2901A00831	2022-03-22	2023-03-21

## 5. Tissue Simulating Liquids

### 5.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.

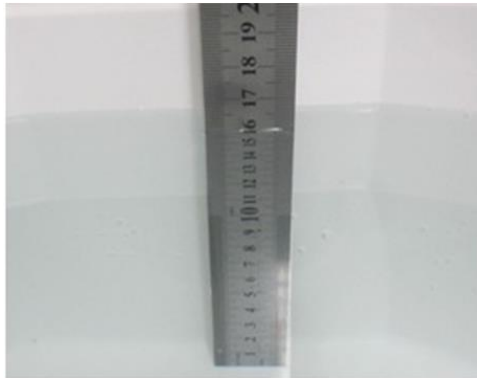

**Liquid Height for Head/Body SAR**

#### The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	Sugar (%)	HEC (%)	Preventol (%)	DGBE (%)
<b>Head/Body</b>						
750	41.1	1.4	57.0	0.2	0.3	0
835	40.3	1.4	57.9	0.2	0.2	0
1700-1900	55.2	0.3	0	0	0	44.5
2450	55.0	0.1	0	0	0	44.9
2600	54.9	0.1	0	0	0	45.0

Frequency (MHz)	Water (%)	Hexyl Carbitol (%)	Triton X-100 (%)
<b>Head/Body</b>			
5200-5800	78.6	10.7	10.7

## 5.2 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Target Frequency (MHz)	Head		Body	
	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
150	0.76	52.3	0.80	61.9
300	0.87	45.3	0.92	58.2
450	0.87	43.5	0.94	56.7
<b>750</b>	<b>0.89</b>	<b>41.9</b>	<b>0.96</b>	<b>55.5</b>
<b>835</b>	<b>0.90</b>	<b>41.5</b>	<b>0.97</b>	<b>55.2</b>
900	0.97	41.5	1.05	55.0
915	0.98	41.5	1.06	55.0
1450	1.20	40.5	1.30	54.0
1610	1.29	40.3	1.40	53.8
<b>1800-2000</b>	<b>1.40</b>	<b>40.0</b>	<b>1.52</b>	<b>53.3</b>
<b>2450</b>	<b>1.80</b>	<b>39.2</b>	<b>1.95</b>	<b>52.7</b>
<b>2600</b>	<b>1.96</b>	<b>39.0</b>	<b>2.16</b>	<b>52.5</b>
3000	2.40	38.5	2.73	52.0
<b>5200</b>	<b>4.66</b>	<b>36.0</b>	<b>5.30</b>	<b>49.0</b>
<b>5400</b>	<b>4.86</b>	<b>35.8</b>	<b>5.53</b>	<b>48.7</b>
<b>5600</b>	<b>5.07</b>	<b>35.5</b>	<b>5.77</b>	<b>48.5</b>
<b>5800</b>	<b>5.27</b>	<b>35.3</b>	<b>6.00</b>	<b>48.2</b>



### 5.3 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and an Agilent Network Analyzer.

#### Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Head Tissue Simulating Liquid									
Freq. MHz.	Temp. (°C)	Conductivity			Permittivity			Limit (%)	Date
		Reading ( $\sigma$ )	Target ( $\sigma$ )	Delta (%)	Reading ( $\epsilon_r$ )	Target ( $\epsilon_r$ )	Delta (%)		
750	22.2	0.87	0.89	-2.25	41.02	41.9	-2.10	±5	2022-06-15
835	22.2	0.91	0.90	1.11	42.75	41.5	3.01	±5	2022-06-15
1800	22.2	1.41	1.40	0.71	41.43	40.0	3.58	±5	2022-06-15
1900	22.2	1.41	1.40	0.71	42.06	40.0	5.15	±5	2022-06-15
2450	22.2	1.87	1.80	3.89	38.45	39.2	-1.91	±5	2022-06-15
2600	22.2	2.04	1.96	4.08	38.93	39.0	-0.18	±5	2022-06-15
5200	22.2	4.94	4.66	6.01	37.63	36.0	4.53	±5	2022-06-16
5400	22.2	5.37	4.86	10.49	36.96	35.8	3.24	±5	2022-06-16
5600	22.2	5.14	5.07	1.38	36.36	35.5	2.42	±5	2022-06-16
5800	22.2	5.13	5.27	-2.66	36.29	35.3	2.80	±5	2022-06-16


## 6. SAR Measurement Evaluation

### 6.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 6.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835MHz, 1800MHz, 1900MHz, 2450MHz, 2600MHz, and 5GHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

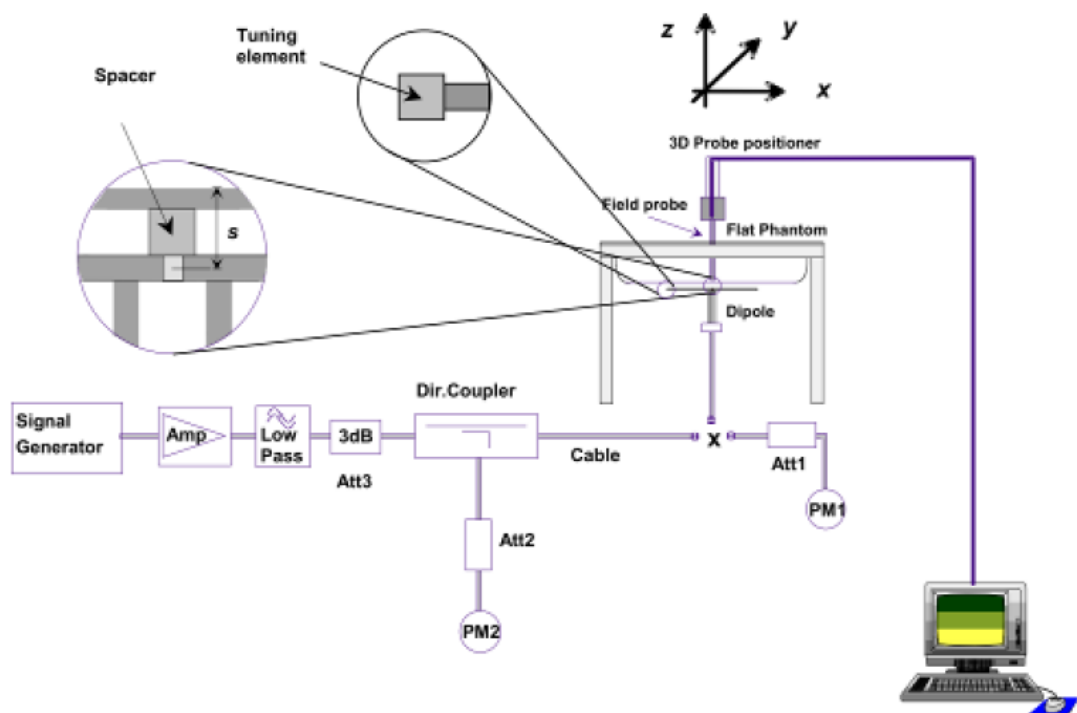

System Verification Setup Block Diagram



**Setup Photo of Dipole Antenna**

The output power on dipole port must be calibrated to 24 dBm(250 mW) before dipole is connected.  
The output power on 5 GHz Waveguide must be calibrated to 20 dBm (100mW) before 5 GHz Waveguide is connected.

### 6.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. Table 6.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency	Targeted SAR <sub>1g</sub>	Measured SAR <sub>1g</sub>	Normalized SAR <sub>1g</sub>	Tolerance	Date
MHz	(W/kg)	(W/kg)	(W/kg)	(%)	
Head					
750	8.40	2.18	8.72	3.81	2022-06-15
835	9.65	2.51	10.04	4.04	2022-06-15
1800	38.49	9.46	37.84	-1.69	2022-06-15
1900	39.59	9.91	39.64	0.13	2022-06-15
2450	53.76	13.75	55.00	2.31	2022-06-15
2600	56.81	13.54	54.16	-4.66	2022-06-15
5200	161.23	16.746	167.46	3.86	2022-06-16
5400	165.58	17.481	174.81	5.57	2022-06-16
5600	173.58	17.604	176.04	1.42	2022-06-16
5800	179.32	17.961	179.61	0.16	2022-06-16

**Remark:** Referring to IEEE 1528:2013, Section 8.2, The system check shall be performed at a test frequency that is within  $\pm 10\%$  or  $\pm 100$  MHz of the compliance test mid-band frequency, so the 1750 MHz system verification is made of 1800MHz Dipole.


#### Targeted and Measurement SAR

**Please refer to Annex A for the plots of system performance check.**

## 7. EUT Testing Position

### 7.1 Define Two Imaginary Lines on The Handset

- (a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width  $w_t$  of the handset at the level of the acoustic output, and the midpoint of the width  $w_b$  of the bottom of the handset.
- (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

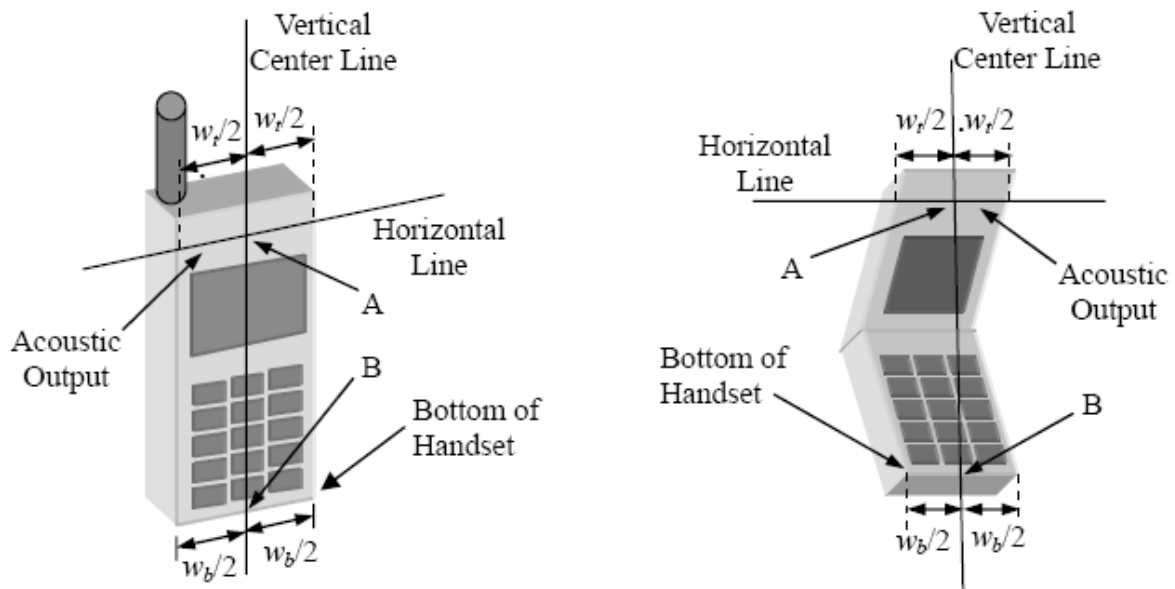

**Illustration for Handset Vertical and Horizontal Reference Lines**

## 7.2 Cheek Position

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 7.2).

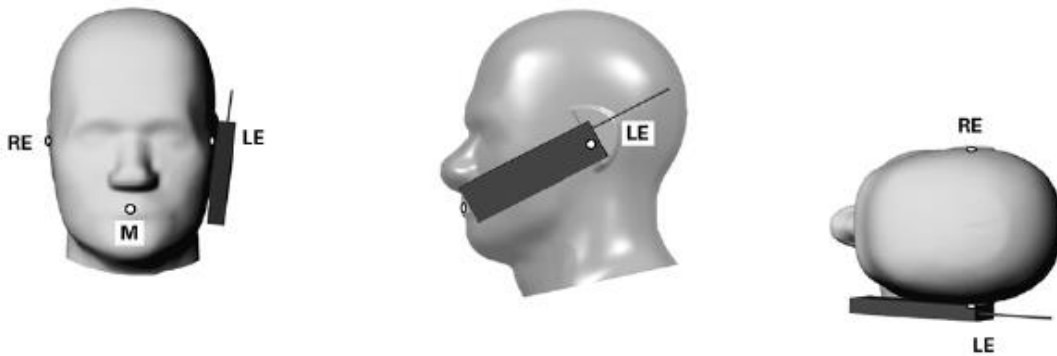


Illustration for Cheek Position

## 7.3 Tilted Position

- (a) To position the device in the “cheek” position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 7.3).

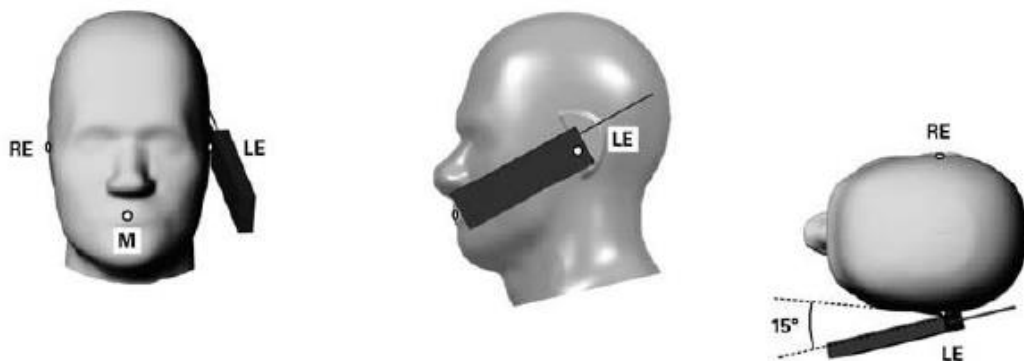


Illustration for Tilted Position

### 7.4 Body Position

- (a) To position the device parallel to the phantom surface with each side.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 10mm.


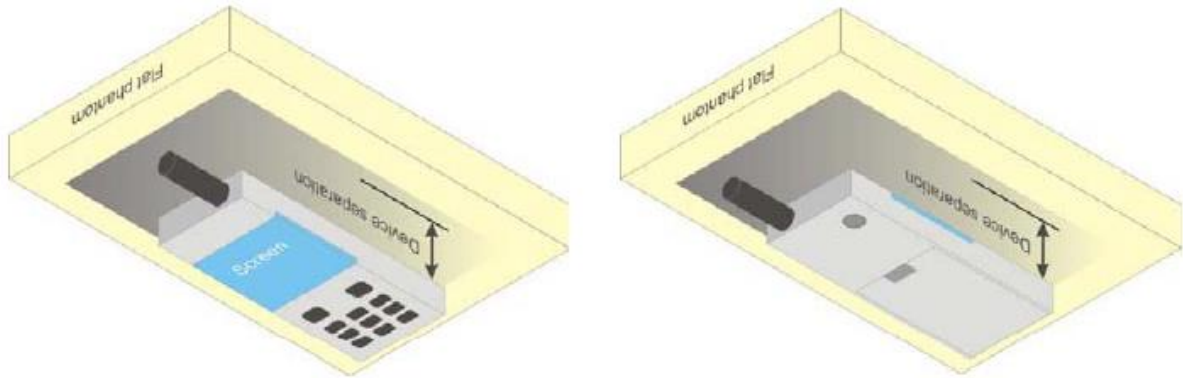


Illustration for Body Position

### 7.5 EUT Antenna Position

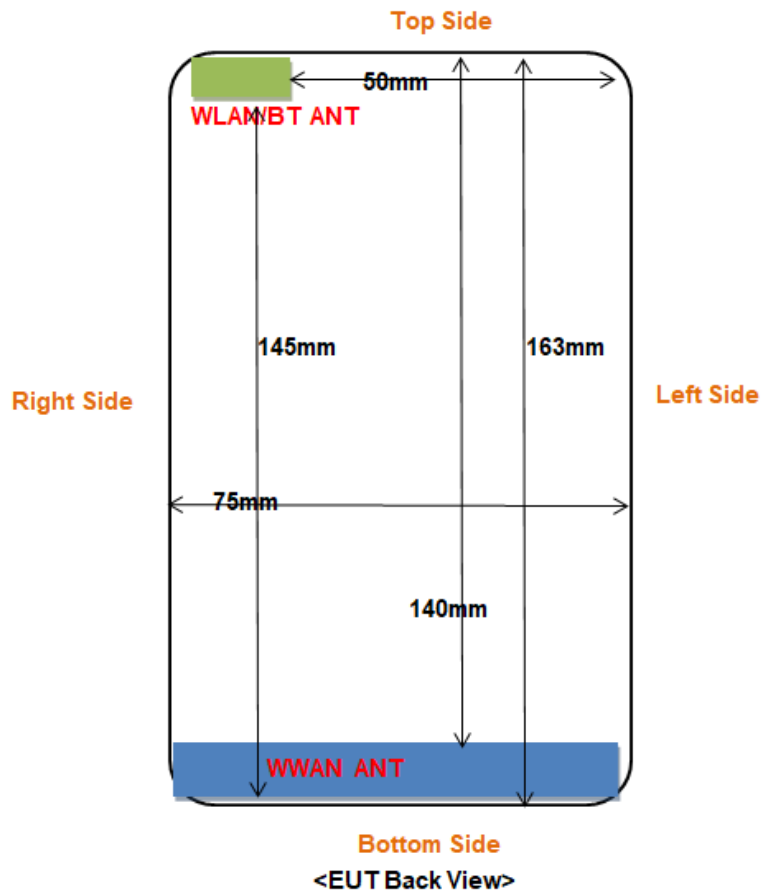

Block Diagram for EUT Antenna Position

Distance of EUT antenna-to-edge/surface(mm), Test distance:10mm						
Antennas	Back side	Front side	Left Edge	Right Edge	Top Edge	Bottom Edge
WWAN	<25	<25	<25	<25	140	<25
WLAN	<25	<25	50	<25	<25	145

## 7.6 EUT Testing Position

Head/Body mode SAR assessments are required for this device. This EUT was tested in different positions for different SAR test modes, more information as below:

Head SAR tests				
Antennas	Right Cheek	Left Cheek	Right Tilted	Left Tilted
WWAN	Yes	Yes	Yes	Yes
WLAN	Yes	Yes	Yes	Yes

Body SAR tests, Test distance: 10mm						
Antennas	Back side	Front side	Left Edge	Right Edge	Top Edge	Bottom Edge
WWAN	Yes	Yes	Yes	Yes	No	Yes
WLAN	Yes	Yes	No	Yes	Yes	No

### Remark:

- Referring to KDB 941225 D06, when the overall device length and width are  $\geq 9\text{cm} \times 5\text{cm}$ , the test separation distances is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
- Referring to KDB 648474 D04 Handset SAR v01r03, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2 \text{ W/kg}$

**Please refer to Annex D for the EUT test setup photos.**



## 8. SAR Measurement Procedures

---

### 8.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex D demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### 8.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### **8.3 Area & Zoom Scan Procedures**

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

### **8.4 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### **8.5 SAR Averaged Methods**

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

### **8.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

## 9. SAR Test Result

### 9.1 Conducted RF Output Power

GSM - Burst Average Power (dBm)								
Band	GSM850			Tune-up power (dBm)	PCS1900			Tune-up power (dBm)
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	32.92	<b>32.93</b>	32.77	33.0	29.92	<b>30.21</b>	30.03	30.5
GPRS (1 slot)	33.08	32.97	32.84	33.0	29.90	30.22	30.07	30.5
GPRS (2 slots)	32.15	31.85	31.67	32.5	28.84	29.31	29.12	29.5
GPRS (3 slots)	31.34	30.94	30.86	31.5	27.69	28.24	28.08	28.5
GPRS (4 slots)	<b>30.27</b>	29.68	29.97	30.5	<b>26.93</b>	27.36	26.98	27.5
EDGE (1 slot)	27.53	27.48	27.56	28.0	23.87	24.77	25.66	26.0
EDGE (2 slots)	26.44	26.58	26.72	27.0	22.94	23.56	24.15	24.5
EDGE (3 slots)	25.36	25.73	25.37	26.0	21.86	22.79	23.24	23.5
EDGE (4 slots)	24.64	24.53	24.46	25.0	20.93	21.68	22.12	22.5

GSM - Source-Based Time-Average Power (dBm)								
Band	GSM850			Tune-up power (dBm)	PCS1900			Tune-up power (dBm)
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	23.92	23.93	23.77	24.0	20.92	21.21	21.03	21.5
GPRS (1 slot)	24.08	23.97	23.84	24.0	20.90	21.22	21.07	21.5
GPRS (2 slots)	26.15	25.85	25.67	26.5	22.84	23.31	23.12	23.5
GPRS (3 slots)	27.09	26.69	26.61	27.5	23.44	23.99	23.83	24.0
GPRS (4 slots)	<b>27.27</b>	26.68	26.97	27.5	23.93	<b>24.36</b>	23.98	24.5
EDGE (1 slot)	18.53	18.48	18.56	19.0	14.87	15.77	16.66	17.0
EDGE (2 slots)	20.44	20.58	20.72	21.0	16.94	17.56	18.15	18.5
EDGE (3 slots)	21.11	21.48	21.12	21.5	17.61	18.54	18.99	19.0
EDGE (4 slots)	21.64	21.53	21.46	22.0	17.93	18.68	19.12	19.5

Note: The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:

Source based time-average power = Burst averaged power - Duty cycle factor in dB

Duty cycle factor = 9 dB for 1 Tx slot, 6 dB for 2 Tx slots, 4.25 dB for 3 Tx slots, 3 dB for 4 Tx slots

#### Remark:

1. For Head SAR testing, GSM should be evaluated; therefore the EUT was set in GSM for GSM850 and GSM1900 due to its highest source-based time-average power.
2. For Body SAR testing, GPRS should be evaluated; therefore the EUT was set in GPRS (4TX slots) for GSM850 and

GPRS (4TX slots) for GSM1900 due to its highest source-based time-average power.

3. Per KDB 447498 D01 v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
4. The DUT do not support DTM function.
5. The DUT do not support Hotspot function.

WCDMA - Average Power (dBm)								
Band	WCDMA Band II				WCDMA Band V			
Channel	9262	9400	9538	Tune-up	4132	4183	4233	Tune-up
Frequency (MHz)	1852.4	1880.0	1907.6	power (dBm)	826.4	836.4	846.6	power (dBm)
RMC 12.2k	22.23	22.59	<b>22.84</b>	23.0	<b>22.74</b>	22.68	22.69	23.0
HSDPA Subtest-1	21.17	21.48	21.72	22.0	21.40	21.44	21.41	21.5
HSDPA Subtest-2	21.03	21.35	21.63	22.0	21.34	21.31	21.38	21.5
HSDPA Subtest-3	20.96	21.29	21.58	22.0	21.28	21.23	21.26	21.5
HSDPA Subtest-4	20.83	21.18	21.49	21.5	21.13	21.19	21.16	21.5
HSUPA Subtest-1	20.77	21.78	21.32	22.0	20.76	20.87	20.97	21.0
HSUPA Subtest-2	20.63	21.65	21.28	22.0	20.63	20.79	20.83	21.0
HSUPA Subtest-3	20.58	21.57	21.16	22.0	20.54	20.68	20.76	21.0
HSUPA Subtest-4	20.49	21.43	21.05	21.5	20.48	20.53	20.61	21.0
HSUPA Subtest-5	20.42	21.39	20.97	21.5	20.36	20.49	20.52	21.0

**Remark:**

1. Per KDB 941225 D01 v03, the 12.2kbps RMC mode was selected for SAR testing (the primary mode).
2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode

**FDD-LTE Band 4**

UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Lower Limit (dBm)	Upper Limit (dBm)	Measured (dBm)	Verdict
19957	1.4	QPSK	1	LOW	0	30	23.14	Pass
19957	1.4	QPSK	1	MID	0	30	23.32	Pass
19957	1.4	QPSK	1	HIGH	0	30	23.09	Pass
19957	1.4	QPSK	3	LOW	0	30	23.23	Pass
19957	1.4	QPSK	3	MID	0	30	23.25	Pass
19957	1.4	QPSK	3	HIGH	0	30	23.2	Pass
19957	1.4	QPSK	6	LOW	0	30	22.21	Pass
19957	1.4	Q16	1	LOW	0	30	22.22	Pass
19957	1.4	Q16	1	MID	0	30	22.43	Pass
19957	1.4	Q16	1	HIGH	0	30	22.23	Pass
19957	1.4	Q16	3	LOW	0	30	22.25	Pass
19957	1.4	Q16	3	MID	0	30	22.25	Pass
19957	1.4	Q16	3	HIGH	0	30	22.21	Pass
19957	1.4	Q16	6	LOW	0	30	21.41	Pass
20175	1.4	QPSK	1	LOW	0	30	23.19	Pass
20175	1.4	QPSK	1	MID	0	30	23.29	Pass
20175	1.4	QPSK	1	HIGH	0	30	23.15	Pass
20175	1.4	QPSK	3	LOW	0	30	23.22	Pass
20175	1.4	QPSK	3	MID	0	30	23.27	Pass
20175	1.4	QPSK	3	HIGH	0	30	23.23	Pass
20175	1.4	QPSK	6	LOW	0	30	22.21	Pass
20175	1.4	Q16	1	LOW	0	30	22.5	Pass
20175	1.4	Q16	1	MID	0	30	22.7	Pass
20175	1.4	Q16	1	HIGH	0	30	22.49	Pass
20175	1.4	Q16	3	LOW	0	30	22.44	Pass
20175	1.4	Q16	3	MID	0	30	22.41	Pass
20175	1.4	Q16	3	HIGH	0	30	22.5	Pass
20175	1.4	Q16	6	LOW	0	30	21.15	Pass
20393	1.4	QPSK	1	LOW	0	30	23.04	Pass
20393	1.4	QPSK	1	MID	0	30	23.25	Pass
20393	1.4	QPSK	1	HIGH	0	30	23.03	Pass
20393	1.4	QPSK	3	LOW	0	30	23.11	Pass
20393	1.4	QPSK	3	MID	0	30	23.16	Pass
20393	1.4	QPSK	3	HIGH	0	30	23.16	Pass
20393	1.4	QPSK	6	LOW	0	30	22.09	Pass
20393	1.4	Q16	1	LOW	0	30	21.99	Pass
20393	1.4	Q16	1	MID	0	30	22.29	Pass

UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Lower Limit (dBm)	Upper Limit (dBm)	Measured (dBm)	Verdict
20393	1.4	Q16	1	HIGH	0	30	21.99	Pass
20393	1.4	Q16	3	LOW	0	30	22.2	Pass
20393	1.4	Q16	3	MID	0	30	22.25	Pass
20393	1.4	Q16	3	HIGH	0	30	22.2	Pass
20393	1.4	Q16	6	LOW	0	30	21.26	Pass
19965	3	QPSK	1	LOW	0	30	23.15	Pass
19965	3	QPSK	1	MID	0	30	23.11	Pass
19965	3	QPSK	1	HIGH	0	30	23.08	Pass
19965	3	QPSK	8	LOW	0	30	22.14	Pass
19965	3	QPSK	8	MID	0	30	22.18	Pass
19965	3	QPSK	8	HIGH	0	30	22.1	Pass
19965	3	QPSK	15	LOW	0	30	22.15	Pass
19965	3	Q16	1	LOW	0	30	22.05	Pass
19965	3	Q16	1	MID	0	30	22.02	Pass
19965	3	Q16	1	HIGH	0	30	22.03	Pass
19965	3	Q16	8	LOW	0	30	21.3	Pass
19965	3	Q16	8	MID	0	30	21.33	Pass
19965	3	Q16	8	HIGH	0	30	21.25	Pass
19965	3	Q16	15	LOW	0	30	21.2	Pass
20175	3	QPSK	1	LOW	0	30	23.17	Pass
20175	3	QPSK	1	MID	0	30	23.18	Pass
20175	3	QPSK	1	HIGH	0	30	23.18	Pass
20175	3	QPSK	8	LOW	0	30	22.17	Pass
20175	3	QPSK	8	MID	0	30	22.23	Pass
20175	3	QPSK	8	HIGH	0	30	22.15	Pass
20175	3	QPSK	15	LOW	0	30	22.14	Pass
20175	3	Q16	1	LOW	0	30	22.53	Pass
20175	3	Q16	1	MID	0	30	22.53	Pass
20175	3	Q16	1	HIGH	0	30	22.5	Pass
20175	3	Q16	8	LOW	0	30	21.29	Pass
20175	3	Q16	8	MID	0	30	21.35	Pass
20175	3	Q16	8	HIGH	0	30	21.28	Pass
20175	3	Q16	15	LOW	0	30	21.21	Pass
20385	3	QPSK	1	LOW	0	30	23.14	Pass
20385	3	QPSK	1	MID	0	30	23.08	Pass
20385	3	QPSK	1	HIGH	0	30	23.05	Pass
20385	3	QPSK	8	LOW	0	30	22.09	Pass
20385	3	QPSK	8	MID	0	30	22.06	Pass
20385	3	QPSK	8	HIGH	0	30	22.03	Pass

UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Lower Limit (dBm)	Upper Limit (dBm)	Measured (dBm)	Verdict
20385	3	QPSK	15	LOW	0	30	22.05	Pass
20385	3	Q16	1	LOW	0	30	22.06	Pass
20385	3	Q16	1	MID	0	30	21.97	Pass
20385	3	Q16	1	HIGH	0	30	21.96	Pass
20385	3	Q16	8	LOW	0	30	21.13	Pass
20385	3	Q16	8	MID	0	30	21.17	Pass
20385	3	Q16	8	HIGH	0	30	21.09	Pass
20385	3	Q16	15	LOW	0	30	21.05	Pass
19975	5	QPSK	1	LOW	0	30	23.01	Pass
19975	5	QPSK	1	MID	0	30	23.15	Pass
19975	5	QPSK	1	HIGH	0	30	23.04	Pass
19975	5	QPSK	12	LOW	0	30	22.16	Pass
19975	5	QPSK	12	MID	0	30	22.16	Pass
19975	5	QPSK	12	HIGH	0	30	22.13	Pass
19975	5	QPSK	25	LOW	0	30	22.12	Pass
19975	5	Q16	1	LOW	0	30	22.2	Pass
19975	5	Q16	1	MID	0	30	22.3	Pass
19975	5	Q16	1	HIGH	0	30	22.2	Pass
19975	5	Q16	12	LOW	0	30	21.24	Pass
19975	5	Q16	12	MID	0	30	21.25	Pass
19975	5	Q16	12	HIGH	0	30	21.22	Pass
19975	5	Q16	25	LOW	0	30	21.21	Pass
20175	5	QPSK	1	LOW	0	30	23.09	Pass
20175	5	QPSK	1	MID	0	30	23.21	Pass
20175	5	QPSK	1	HIGH	0	30	23.08	Pass
20175	5	QPSK	12	LOW	0	30	22.1	Pass
20175	5	QPSK	12	MID	0	30	22.18	Pass
20175	5	QPSK	12	HIGH	0	30	22.15	Pass
20175	5	QPSK	25	LOW	0	30	22.18	Pass
20175	5	Q16	1	LOW	0	30	22.58	Pass
20175	5	Q16	1	MID	0	30	22.68	Pass
20175	5	Q16	1	HIGH	0	30	22.56	Pass
20175	5	Q16	12	LOW	0	30	21.27	Pass
20175	5	Q16	12	MID	0	30	21.31	Pass
20175	5	Q16	12	HIGH	0	30	21.3	Pass
20175	5	Q16	25	LOW	0	30	21.34	Pass
20375	5	QPSK	1	LOW	0	30	22.97	Pass
20375	5	QPSK	1	MID	0	30	23.08	Pass
20375	5	QPSK	1	HIGH	0	30	22.92	Pass

UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Lower Limit (dBm)	Upper Limit (dBm)	Measured (dBm)	Verdict
20375	5	QPSK	12	LOW	0	30	22.08	Pass
20375	5	QPSK	12	MID	0	30	22.11	Pass
20375	5	QPSK	12	HIGH	0	30	22.01	Pass
20375	5	QPSK	25	LOW	0	30	22.03	Pass
20375	5	Q16	1	LOW	0	30	22.04	Pass
20375	5	Q16	1	MID	0	30	22.14	Pass
20375	5	Q16	1	HIGH	0	30	22.02	Pass
20375	5	Q16	12	LOW	0	30	21.15	Pass
20375	5	Q16	12	MID	0	30	21.14	Pass
20375	5	Q16	12	HIGH	0	30	21.08	Pass
20375	5	Q16	25	LOW	0	30	21.04	Pass
20000	10	QPSK	1	LOW	0	30	23.09	Pass
20000	10	QPSK	1	MID	0	30	23.28	Pass
20000	10	QPSK	1	HIGH	0	30	23.08	Pass
20000	10	QPSK	25	LOW	0	30	22.14	Pass
20000	10	QPSK	25	MID	0	30	22.14	Pass
20000	10	QPSK	25	HIGH	0	30	22.14	Pass
20000	10	QPSK	50	LOW	0	30	22.14	Pass
20000	10	Q16	1	LOW	0	30	21.99	Pass
20000	10	Q16	1	MID	0	30	22.19	Pass
20000	10	Q16	1	HIGH	0	30	22.06	Pass
20000	10	Q16	25	LOW	0	30	21.22	Pass
20000	10	Q16	25	MID	0	30	21.2	Pass
20000	10	Q16	25	HIGH	0	30	21.21	Pass
20000	10	Q16	50	LOW	0	30	21.23	Pass
20175	10	QPSK	1	LOW	0	30	23.15	Pass
20175	10	QPSK	1	MID	0	30	23.32	Pass
20175	10	QPSK	1	HIGH	0	30	23.12	Pass
20175	10	QPSK	25	LOW	0	30	22.12	Pass
20175	10	QPSK	25	MID	0	30	22.15	Pass
20175	10	QPSK	25	HIGH	0	30	22.15	Pass
20175	10	QPSK	50	LOW	0	30	22.21	Pass
20175	10	Q16	1	LOW	0	30	22.51	Pass
20175	10	Q16	1	MID	0	30	22.65	Pass
20175	10	Q16	1	HIGH	0	30	22.47	Pass
20175	10	Q16	25	LOW	0	30	21.23	Pass
20175	10	Q16	25	MID	0	30	21.27	Pass
20175	10	Q16	25	HIGH	0	30	21.28	Pass
20175	10	Q16	50	LOW	0	30	21.27	Pass



UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Lower Limit (dBm)	Upper Limit (dBm)	Measured (dBm)	Verdict
20350	10	QPSK	1	LOW	0	30	23.18	Pass
20350	10	QPSK	1	MID	0	30	23.29	Pass
20350	10	QPSK	1	HIGH	0	30	23.05	Pass
20350	10	QPSK	25	LOW	0	30	22.08	Pass
20350	10	QPSK	25	MID	0	30	22.1	Pass
20350	10	QPSK	25	HIGH	0	30	22.04	Pass
20350	10	QPSK	50	LOW	0	30	22.13	Pass
20350	10	Q16	1	LOW	0	30	22.04	Pass
20350	10	Q16	1	MID	0	30	22.12	Pass
20350	10	Q16	1	HIGH	0	30	21.93	Pass
20350	10	Q16	25	LOW	0	30	21.25	Pass
20350	10	Q16	25	MID	0	30	21.21	Pass
20350	10	Q16	25	HIGH	0	30	21.19	Pass
20350	10	Q16	50	LOW	0	30	21.18	Pass
20025	15	QPSK	1	LOW	0	30	23.02	Pass
20025	15	QPSK	1	MID	0	30	23.15	Pass
20025	15	QPSK	1	HIGH	0	30	23.06	Pass
20025	15	QPSK	36	LOW	0	30	22.24	Pass
20025	15	QPSK	36	MID	0	30	22.24	Pass
20025	15	QPSK	36	HIGH	0	30	22.26	Pass
20025	15	QPSK	75	LOW	0	30	22.26	Pass
20025	15	Q16	1	LOW	0	30	21.89	Pass
20025	15	Q16	1	MID	0	30	22.09	Pass
20025	15	Q16	1	HIGH	0	30	21.98	Pass
20025	15	Q16	36	LOW	0	30	21.22	Pass
20025	15	Q16	36	MID	0	30	21.26	Pass
20025	15	Q16	36	HIGH	0	30	21.22	Pass
20025	15	Q16	75	LOW	0	30	21.26	Pass
20175	15	QPSK	1	LOW	0	30	23.06	Pass
20175	15	QPSK	1	MID	0	30	23.21	Pass
20175	15	QPSK	1	HIGH	0	30	23.05	Pass
20175	15	QPSK	36	LOW	0	30	22.17	Pass
20175	15	QPSK	36	MID	0	30	22.26	Pass
20175	15	QPSK	36	HIGH	0	30	22.29	Pass
20175	15	QPSK	75	LOW	0	30	22.25	Pass
20175	15	Q16	1	LOW	0	30	22.43	Pass
20175	15	Q16	1	MID	0	30	22.54	Pass
20175	15	Q16	1	HIGH	0	30	22.34	Pass
20175	15	Q16	36	LOW	0	30	21.24	Pass

UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Lower Limit (dBm)	Upper Limit (dBm)	Measured (dBm)	Verdict
20175	15	Q16	36	MID	0	30	21.35	Pass
20175	15	Q16	36	HIGH	0	30	21.38	Pass
20175	15	Q16	75	LOW	0	30	21.27	Pass
20325	15	QPSK	1	LOW	0	30	23.11	Pass
20325	15	QPSK	1	MID	0	30	23.16	Pass
20325	15	QPSK	1	HIGH	0	30	22.97	Pass
20325	15	QPSK	36	LOW	0	30	22.28	Pass
20325	15	QPSK	36	MID	0	30	22.27	Pass
20325	15	QPSK	36	HIGH	0	30	22.18	Pass
20325	15	QPSK	75	LOW	0	30	22.27	Pass
20325	15	Q16	1	LOW	0	30	22.39	Pass
20325	15	Q16	1	MID	0	30	22.41	Pass
20325	15	Q16	1	HIGH	0	30	22.24	Pass
20325	15	Q16	36	LOW	0	30	21.2	Pass
20325	15	Q16	36	MID	0	30	21.2	Pass
20325	15	Q16	36	HIGH	0	30	21.12	Pass
20325	15	Q16	75	LOW	0	30	21.21	Pass
20050	20	QPSK	1	LOW	0	30	22.86	Pass
20050	20	QPSK	1	MID	0	30	23.3	Pass
20050	20	QPSK	1	HIGH	0	30	22.96	Pass
20050	20	QPSK	50	LOW	0	30	22.16	Pass
20050	20	QPSK	50	MID	0	30	22.21	Pass
20050	20	QPSK	50	HIGH	0	30	22.26	Pass
20050	20	QPSK	100	LOW	0	30	22.21	Pass
20050	20	Q16	1	LOW	0	30	22.39	Pass
20050	20	Q16	1	MID	0	30	22.81	Pass
20050	20	Q16	1	HIGH	0	30	22.45	Pass
20050	20	Q16	50	LOW	0	30	21.22	Pass
20050	20	Q16	50	MID	0	30	21.26	Pass
20050	20	Q16	50	HIGH	0	30	21.37	Pass
20050	20	Q16	100	LOW	0	30	21.3	Pass
20175	20	QPSK	1	LOW	0	30	22.95	Pass
20175	20	QPSK	1	MID	0	30	<b>23.36</b>	Pass
20175	20	QPSK	1	HIGH	0	30	22.92	Pass
20175	20	QPSK	50	LOW	0	30	22.02	Pass
20175	20	QPSK	50	MID	0	30	22.2	Pass
20175	20	QPSK	50	HIGH	0	30	22.2	Pass
20175	20	QPSK	100	LOW	0	30	22.11	Pass
20175	20	Q16	1	LOW	0	30	22.39	Pass

UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Lower Limit (dBm)	Upper Limit (dBm)	Measured (dBm)	Verdict
20175	20	Q16	1	MID	0	30	22.76	Pass
20175	20	Q16	1	HIGH	0	30	22.26	Pass
20175	20	Q16	50	LOW	0	30	21.13	Pass
20175	20	Q16	50	MID	0	30	21.28	Pass
20175	20	Q16	50	HIGH	0	30	21.26	Pass
20175	20	Q16	100	LOW	0	30	21.22	Pass
20300	20	QPSK	1	LOW	0	30	22.9	Pass
20300	20	QPSK	1	MID	0	30	23.35	Pass
20300	20	QPSK	1	HIGH	0	30	22.79	Pass
20300	20	QPSK	50	LOW	0	30	22.17	Pass
20300	20	QPSK	50	MID	0	30	22.17	Pass
20300	20	QPSK	50	HIGH	0	30	22.04	Pass
20300	20	QPSK	100	LOW	0	30	22.1	Pass
20300	20	Q16	1	LOW	0	30	22.21	Pass
20300	20	Q16	1	MID	0	30	22.64	Pass
20300	20	Q16	1	HIGH	0	30	22.11	Pass
20300	20	Q16	50	LOW	0	30	21.18	Pass
20300	20	Q16	50	MID	0	30	21.2	Pass
20300	20	Q16	50	HIGH	0	30	21.08	Pass
20300	20	Q16	100	LOW	0	30	21.12	Pass

**FDD-LTE Band 7**

UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Lower Limit (dBm)	Upper Limit (dBm)	Measured (dBm)	Verdict
20775	5	QPSK	1	LOW	0	33	23.01	Pass
20775	5	QPSK	1	MID	0	33	23.18	Pass
20775	5	QPSK	1	HIGH	0	33	23.06	Pass
20775	5	QPSK	12	LOW	0	33	22.08	Pass
20775	5	QPSK	12	MID	0	33	22.16	Pass
20775	5	QPSK	12	HIGH	0	33	22.13	Pass
20775	5	QPSK	25	LOW	0	33	22.12	Pass
20775	5	Q16	1	LOW	0	33	22.42	Pass
20775	5	Q16	1	MID	0	33	22.6	Pass
20775	5	Q16	1	HIGH	0	33	22.49	Pass
20775	5	Q16	12	LOW	0	33	21.26	Pass
20775	5	Q16	12	MID	0	33	21.34	Pass
20775	5	Q16	12	HIGH	0	33	21.34	Pass
20775	5	Q16	25	LOW	0	33	21.21	Pass

UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Lower Limit (dBm)	Upper Limit (dBm)	Measured (dBm)	Verdict
21100	5	QPSK	1	LOW	0	33	23.04	Pass
21100	5	QPSK	1	MID	0	33	23.15	Pass
21100	5	QPSK	1	HIGH	0	33	23.01	Pass
21100	5	QPSK	12	LOW	0	33	22.15	Pass
21100	5	QPSK	12	MID	0	33	22.18	Pass
21100	5	QPSK	12	HIGH	0	33	22.08	Pass
21100	5	QPSK	25	LOW	0	33	22.08	Pass
21100	5	Q16	1	LOW	0	33	22.08	Pass
21100	5	Q16	1	MID	0	33	22.18	Pass
21100	5	Q16	1	HIGH	0	33	22.1	Pass
21100	5	Q16	12	LOW	0	33	21.21	Pass
21100	5	Q16	12	MID	0	33	21.27	Pass
21100	5	Q16	12	HIGH	0	33	21.2	Pass
21100	5	Q16	25	LOW	0	33	21.12	Pass
21425	5	QPSK	1	LOW	0	33	23.01	Pass
21425	5	QPSK	1	MID	0	33	23.13	Pass
21425	5	QPSK	1	HIGH	0	33	23.03	Pass
21425	5	QPSK	12	LOW	0	33	22.14	Pass
21425	5	QPSK	12	MID	0	33	22.18	Pass
21425	5	QPSK	12	HIGH	0	33	22.09	Pass
21425	5	QPSK	25	LOW	0	33	22.12	Pass
21425	5	Q16	1	LOW	0	33	22.12	Pass
21425	5	Q16	1	MID	0	33	22.15	Pass
21425	5	Q16	1	HIGH	0	33	22.01	Pass
21425	5	Q16	12	LOW	0	33	21.26	Pass
21425	5	Q16	12	MID	0	33	21.26	Pass
21425	5	Q16	12	HIGH	0	33	21.16	Pass
21425	5	Q16	25	LOW	0	33	21.18	Pass
20800	10	QPSK	1	LOW	0	33	23.03	Pass
20800	10	QPSK	1	MID	0	33	<b>23.19</b>	Pass
20800	10	QPSK	1	HIGH	0	33	23.11	Pass
20800	10	QPSK	25	LOW	0	33	22.07	Pass
20800	10	QPSK	25	MID	0	33	22.08	Pass
20800	10	QPSK	25	HIGH	0	33	22.09	Pass
20800	10	QPSK	50	LOW	0	33	21.89	Pass
20800	10	Q16	1	LOW	0	33	21.39	Pass
20800	10	Q16	1	MID	0	33	21.64	Pass
20800	10	Q16	1	HIGH	0	33	21.52	Pass
20800	10	Q16	25	LOW	0	33	20.66	Pass

UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Lower Limit (dBm)	Upper Limit (dBm)	Measured (dBm)	Verdict
20800	10	Q16	25	MID	0	33	20.71	Pass
20800	10	Q16	25	HIGH	0	33	20.75	Pass
20800	10	Q16	50	LOW	0	33	20.68	Pass
21100	10	QPSK	1	LOW	0	33	23.03	Pass
21100	10	QPSK	1	MID	0	33	22.86	Pass
21100	10	QPSK	1	HIGH	0	33	22.49	Pass
21100	10	QPSK	25	LOW	0	33	21.68	Pass
21100	10	QPSK	25	MID	0	33	21.67	Pass
21100	10	QPSK	25	HIGH	0	33	21.68	Pass
21100	10	QPSK	50	LOW	0	33	21.68	Pass
21100	10	Q16	1	LOW	0	33	21.92	Pass
21100	10	Q16	1	MID	0	33	22.09	Pass
21100	10	Q16	1	HIGH	0	33	21.96	Pass
21100	10	Q16	25	LOW	0	33	20.78	Pass
21100	10	Q16	25	MID	0	33	20.75	Pass
21100	10	Q16	25	HIGH	0	33	20.76	Pass
21100	10	Q16	50	LOW	0	33	20.75	Pass
21400	10	QPSK	1	LOW	0	33	22.66	Pass
21400	10	QPSK	1	MID	0	33	22.76	Pass
21400	10	QPSK	1	HIGH	0	33	22.52	Pass
21400	10	QPSK	25	LOW	0	33	21.7	Pass
21400	10	QPSK	25	MID	0	33	21.68	Pass
21400	10	QPSK	25	HIGH	0	33	21.69	Pass
21400	10	QPSK	50	LOW	0	33	21.69	Pass
21400	10	Q16	1	LOW	0	33	21.65	Pass
21400	10	Q16	1	MID	0	33	21.77	Pass
21400	10	Q16	1	HIGH	0	33	21.51	Pass
21400	10	Q16	25	LOW	0	33	20.89	Pass
21400	10	Q16	25	MID	0	33	20.84	Pass
21400	10	Q16	25	HIGH	0	33	20.83	Pass
21400	10	Q16	50	LOW	0	33	20.78	Pass
20825	15	QPSK	1	LOW	0	33	22.4	Pass
20825	15	QPSK	1	MID	0	33	22.58	Pass
20825	15	QPSK	1	HIGH	0	33	22.47	Pass
20825	15	QPSK	36	LOW	0	33	21.62	Pass
20825	15	QPSK	36	MID	0	33	21.7	Pass
20825	15	QPSK	36	HIGH	0	33	21.77	Pass
20825	15	QPSK	75	LOW	0	33	21.68	Pass
20825	15	Q16	1	LOW	0	33	21.29	Pass

UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Lower Limit (dBm)	Upper Limit (dBm)	Measured (dBm)	Verdict
20825	15	Q16	1	MID	0	33	21.51	Pass
20825	15	Q16	1	HIGH	0	33	21.39	Pass
20825	15	Q16	36	LOW	0	33	20.55	Pass
20825	15	Q16	36	MID	0	33	20.69	Pass
20825	15	Q16	36	HIGH	0	33	20.72	Pass
20825	15	Q16	75	LOW	0	33	20.68	Pass
21100	15	QPSK	1	LOW	0	33	22.5	Pass
21100	15	QPSK	1	MID	0	33	22.54	Pass
21100	15	QPSK	1	HIGH	0	33	22.37	Pass
21100	15	QPSK	36	LOW	0	33	21.74	Pass
21100	15	QPSK	36	MID	0	33	21.67	Pass
21100	15	QPSK	36	HIGH	0	33	21.65	Pass
21100	15	QPSK	75	LOW	0	33	21.71	Pass
21100	15	Q16	1	LOW	0	33	21.83	Pass
21100	15	Q16	1	MID	0	33	21.94	Pass
21100	15	Q16	1	HIGH	0	33	21.81	Pass
21100	15	Q16	36	LOW	0	33	20.71	Pass
21100	15	Q16	36	MID	0	33	20.71	Pass
21100	15	Q16	36	HIGH	0	33	20.68	Pass
21100	15	Q16	75	LOW	0	33	20.71	Pass
21375	15	QPSK	1	LOW	0	33	22.55	Pass
21375	15	QPSK	1	MID	0	33	22.6	Pass
21375	15	QPSK	1	HIGH	0	33	22.36	Pass
21375	15	QPSK	36	LOW	0	33	21.74	Pass
21375	15	QPSK	36	MID	0	33	21.75	Pass
21375	15	QPSK	36	HIGH	0	33	21.71	Pass
21375	15	QPSK	75	LOW	0	33	21.75	Pass
21375	15	Q16	1	LOW	0	33	21.86	Pass
21375	15	Q16	1	MID	0	33	21.91	Pass
21375	15	Q16	1	HIGH	0	33	21.62	Pass
21375	15	Q16	36	LOW	0	33	20.71	Pass
21375	15	Q16	36	MID	0	33	20.68	Pass
21375	15	Q16	36	HIGH	0	33	20.66	Pass
21375	15	Q16	75	LOW	0	33	20.68	Pass
20850	20	QPSK	1	LOW	0	33	22.24	Pass
20850	20	QPSK	1	MID	0	33	22.67	Pass
20850	20	QPSK	1	HIGH	0	33	22.33	Pass
20850	20	QPSK	50	LOW	0	33	21.47	Pass
20850	20	QPSK	50	MID	0	33	21.61	Pass

UL Channel	Bandwidth (MHz)	UL Modulation	UL RB Number	UL RB Position	Lower Limit (dBm)	Upper Limit (dBm)	Measured (dBm)	Verdict
20850	20	QPSK	50	HIGH	0	33	21.6	Pass
20850	20	QPSK	100	LOW	0	33	21.56	Pass
20850	20	Q16	1	LOW	0	33	21.73	Pass
20850	20	Q16	1	MID	0	33	22.24	Pass
20850	20	Q16	1	HIGH	0	33	21.85	Pass
20850	20	Q16	50	LOW	0	33	20.58	Pass
20850	20	Q16	50	MID	0	33	20.63	Pass
20850	20	Q16	50	HIGH	0	33	20.69	Pass
20850	20	Q16	100	LOW	0	33	20.62	Pass
21100	20	QPSK	1	LOW	0	33	22.37	Pass
21100	20	QPSK	1	MID	0	33	<b>22.69</b>	Pass
21100	20	QPSK	1	HIGH	0	33	22.34	Pass
21100	20	QPSK	50	LOW	0	33	21.62	Pass
21100	20	QPSK	50	MID	0	33	21.65	Pass
21100	20	QPSK	50	HIGH	0	33	21.56	Pass
21100	20	QPSK	100	LOW	0	33	21.59	Pass
21100	20	Q16	1	LOW	0	33	21.71	Pass
21100	20	Q16	1	MID	0	33	22.03	Pass
21100	20	Q16	1	HIGH	0	33	21.68	Pass
21100	20	Q16	50	LOW	0	33	20.67	Pass
21100	20	Q16	50	MID	0	33	20.67	Pass
21100	20	Q16	50	HIGH	0	33	20.65	Pass
21100	20	Q16	100	LOW	0	33	20.65	Pass
21350	20	QPSK	1	LOW	0	33	22.3	Pass
21350	20	QPSK	1	MID	0	33	22.59	Pass
21350	20	QPSK	1	HIGH	0	33	22.15	Pass
21350	20	QPSK	50	LOW	0	33	21.64	Pass
21350	20	QPSK	50	MID	0	33	21.63	Pass
21350	20	QPSK	50	HIGH	0	33	21.53	Pass
21350	20	QPSK	100	LOW	0	33	21.59	Pass
21350	20	Q16	1	LOW	0	33	21.71	Pass
21350	20	Q16	1	MID	0	33	22.02	Pass
21350	20	Q16	1	HIGH	0	33	21.53	Pass
21350	20	Q16	50	LOW	0	33	20.66	Pass
21350	20	Q16	50	MID	0	33	20.67	Pass
21350	20	Q16	50	HIGH	0	33	20.56	Pass
21350	20	Q16	100	LOW	0	33	20.61	Pass

**Remark:**

1. Per KDB941225 D05 v02r05, Start with the largest channel bandwidth then measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle, and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. 6 When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.
2. Per KDB941225 D05 v02r05, The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.
3. Per KDB941225 D05 v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations, and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB941225 D05 v02r05, For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in 5.2.1, 5.2.2, and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> \frac{1}{2}$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.



WLAN(2.4GHz)					
Test Mode	Data Rate	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11b	1Mbps	CH 01	2412	18.24	18.5
		CH 06	2437	18.41	18.5
		CH 11	2462	18.26	18.5
802.11g	54Mbps	CH 01	2412	20.18	20.5
		CH 06	2437	19.89	20.0
		CH 11	2462	19.68	20.0
802.11n (20MHz)	MCS7	CH 01	2412	20.12	20.5
		CH 06	2437	<b>20.19</b>	20.5
		CH 11	2462	19.77	20.0
802.11n (40MHz)	MCS7	CH 03	2422	19.31	19.5
		CH 06	2437	19.33	19.5
		CH 09	2452	19.77	20.0

WLAN(5.2GHz)				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 36	5180	15.48	15.5
	CH 40	5200	14.51	15.0
	CH 48	5240	13.82	14.0
802.11n (HT20)	CH 36	5180	15.23	15.5
	CH 40	5200	14.32	14.5
	CH 48	5240	13.50	14.0
802.11n (HT40)	CH 38	5190	15.69	16.0
	CH 46	5230	14.64	15.0
802.11ac (20MHz)	CH 36	5180	14.82	15.0
	CH 40	5200	14.30	14.5
	CH 48	5240	13.80	14.0
802.11ac (40MHz)	CH 38	5190	<b>15.96</b>	16.0
	CH 46	5230	14.95	15.0
802.11ac (80MHz)	CH42	5210	15.87	16.0

WLAN(5.3GHz)				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 52	5260	13.76	14.0
	CH 56	5280	13.19	13.5
	CH 64	5320	13.72	14.0
802.11n (20MHz)	CH 52	5260	13.73	14.0
	CH 56	5280	13.42	13.5
	CH 64	5320	12.43	12.5
802.11n (40MHz)	CH 54	5270	<b>14.39</b>	14.5
	CH 62	5310	13.30	13.5
802.11ac (20MHz)	CH 52	5260	13.10	13.5
	CH 56	5280	12.64	13.0
	CH 64	5320	12.69	13.0
802.11ac (40MHz)	CH 54	5270	13.09	13.5
	CH 62	5310	12.65	13.0
802.11ac (80MHz)	CH58	5290	13.80	14.0

WLAN(5.6GHz)				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 100	5500	16.14	16.5
	CH 116	5580	15.79	16.0
	CH 140	5700	15.42	15.5
802.11n (20MHz)	CH 100	5500	14.76	15.0
	CH116	5580	15.56	16.0
	CH 140	5700	15.51	16.0
802.11n (40MHz)	CH 102	5510	15.06	15.5
	CH110	5550	15.56	16.0
	CH 134	5670	15.51	16.0
802.11ac (20MHz)	CH 100	5500	15.50	16.0
	CH 116	5580	15.67	16.0
	CH 140	5700	15.31	15.5
802.11ac (40MHz)	CH 102	5510	14.97	15.0
	CH 110	5550	15.50	16.0
	CH 134	5670	15.73	16.0
802.11ac (80MHz)	CH 106	5530	16.01	16.5
	CH 122	5610	<b>16.35</b>	16.5

WLAN(5.8GHz)				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 149	5745	15.01	15.5
	CH 157	5785	13.88	14.0
	CH 165	5825	12.93	13.0
802.11n (20MHz)	CH 149	5745	<b>15.05</b>	15.5
	CH 157	5785	13.66	14.0
	CH 165	5825	12.54	13.0
802.11n (40MHz)	CH 151	5755	14.29	14.5
	CH 159	5795	13.44	13.5
802.11ac (20MHz)	CH 149	5745	14.75	15.0
	CH 157	5785	13.31	13.5
	CH 165	5825	12.80	13.0
802.11ac (40MHz)	CH 151	5755	14.72	15.0
	CH 159	5795	13.23	13.5
802.11ac (80MHz)	CH 155	5775	14.30	14.5

**Remark:**

1. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.
2. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements, when the reported SAR of the highest measured maximum output power channel (see 3.1) for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.
3. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is  $\leq 1.2$  W/kg.
4. Per KDB 248227 D01 v02r02, When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined by applying the following steps sequentially.
  - 1) The largest channel bandwidth configuration is selected among the multiple configurations in a frequency band with the same specified maximum output power.
  - 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
  - 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
  - 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

Bluetooth					
Test Mode	Data Rate	CH00	CH39	CH78	Tune-up power (dBm)
GFSK	1Mbps	6.63	6.30	<b>8.66</b>	9.0
Pi/4 QDPSK	2Mbps	5.93	5.60	7.89	8.0
8DPSK	3Mbps	5.81	5.52	7.80	8.0

Bluetooth					
Test Mode	Data Rate	Channel	Frequency (MHz)	Conducted Power(dBm)	Tune-up power (dBm)
BLE	1Mbps	CH 00	2402	-3.67	-3.5
		CH 19	2440	-4.40	-4.0
		CH 39	2480	-4.19	-4.0

## 9.2 Test Results for Standalone SAR Test

### Head SAR

GSM850 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
1.	GSM	Right Cheek	190	836.6	32.93	33.0	1.016	0.478	<b>0.486</b>
	GSM	Right Tilted	190	836.6	32.93	33.0	1.016	0.256	0.260
	GSM	Left Cheek	190	836.6	32.93	33.0	1.016	0.340	0.346
	GSM	Left Tilted	190	836.6	32.93	33.0	1.016	0.178	0.181
	GPRS_4TX	Right Cheek	128	824.2	30.27	30.5	1.054	0.440	0.464
	GPRS_4TX	Right Tilted	128	824.2	30.27	30.5	1.054	0.231	0.244
	GPRS_4TX	Left Cheek	128	824.2	30.27	30.5	1.054	0.316	0.333
	GPRS_4TX	Left Tilted	128	824.2	30.27	30.5	1.054	0.169	0.178

GSM1900 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	M Hz					
	GSM	Right Cheek	661	1880	30.21	30.5	1.069	0.029	0.031
	GSM	Right Tilted	661	1880	30.21	30.5	1.069	0.018	0.019
	GSM	Left Cheek	661	1880	30.21	30.5	1.069	0.069	0.074
	GSM	Left Tilted	661	1880	30.21	30.5	1.069	0.031	0.033
	GPRS_4TX	Right Cheek	512	1850.2	26.93	27.5	1.140	0.026	0.030
	GPRS_4TX	Right Tilted	512	1850.2	26.93	27.5	1.140	0.018	0.021
2.	GPRS_4TX	Left Cheek	512	1850.2	26.93	27.5	1.140	0.076	<b>0.087</b>
	GPRS_4TX	Left Tilted	512	1850.2	26.93	27.5	1.140	0.039	0.044

WCDMA Band 2 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	RMC	Right Cheek	9538	1907.6	22.84	23.0	1.038	0.090	0.093
	RMC	Right Tilted	9538	1907.6	22.84	23.0	1.038	0.052	0.054
3.	RMC	Left Cheek	9538	1907.6	22.84	23.0	1.038	0.094	<b>0.098</b>
	RMC	Left Tilted	9538	1907.6	22.84	23.0	1.038	0.055	0.057

WCDMA Band 5 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	RMC	Right Cheek	4132	826.4	22.74	23.0	1.062	0.259	0.275
	RMC	Right Tilted	4132	826.4	22.74	23.0	1.062	0.147	0.156
4.	RMC	Left Cheek	4132	826.4	22.74	23.0	1.062	0.260	<b>0.276</b>
	RMC	Left Tilted	4132	826.4	22.74	23.0	1.062	0.151	0.160

LTE Band 4– Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency MHz	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)	
	Modulation, Bandwidth, RB								
	QPSK 20MHz 1RB	Right Cheek	1732.5	23.36	23.5	1.033	0.045	0.046	
	QPSK 20MHz 1RB	Right Tilted	1732.5	23.36	23.5	1.033	0.024	0.025	
5.	QPSK 20MHz 1RB	Left Cheek	1732.5	23.36	23.5	1.033	0.058	<b>0.060</b>	
	QPSK 20MHz 1RB	Left Tilted	1732.5	23.36	23.5	1.033	0.028	0.029	
	QPSK 20MHz 50%RB	Right Cheek	1732.5	23.36	23.5	1.033	0.035	0.036	
	QPSK 20MHz 50%RB	Right Tilted	1732.5	23.36	23.5	1.033	0.020	0.021	
	QPSK 20MHz 50%RB	Left Cheek	1732.5	23.36	23.5	1.033	0.049	0.051	
	QPSK 20MHz 50%RB	Left Tilted	1732.5	23.36	23.5	1.033	0.026	0.027	

LTE Band 7– Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency MHz	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)	
	Modulation, Bandwidth								
	QPSK 10MHz 1RB	Right Cheek	2505.0	23.19	23.5	1.074	0.101	0.108	
	QPSK 10MHz 1RB	Right Tilted	2505.0	23.19	23.5	1.074	0.063	0.068	
	QPSK 10MHz 1RB	Left Cheek	2505.0	23.19	23.5	1.074	0.095	0.102	
	QPSK 10MHz 1RB	Left Tilted	2505.0	23.19	23.5	1.074	0.048	0.052	
	QPSK 10MHz 50%RB	Right Cheek	2505.0	23.19	23.5	1.074	0.097	0.104	
	QPSK 10MHz 50%RB	Right Tilted	2505.0	23.19	23.5	1.074	0.056	0.060	
	QPSK 10MHz 50%RB	Left Cheek	2505.0	23.19	23.5	1.074	0.089	0.096	
	QPSK 10MHz 50%RB	Left Tilted	2505.0	23.19	23.5	1.074	0.044	0.047	
6.	QPSK 20MHz 1RB	Right Cheek	2535.0	22.69	23.0	1.074	0.156	<b>0.168</b>	
	QPSK 20MHz 1RB	Right Tilted	2535.0	22.69	23.0	1.074	0.088	0.095	
	QPSK 20MHz 1RB	Left Cheek	2535.0	22.69	23.0	1.074	0.147	0.158	
	QPSK 20MHz 1RB	Left Tilted	2535.0	22.69	23.0	1.074	0.076	0.082	
	QPSK 20MHz 50%RB	Right Cheek	2535.0	22.69	23.0	1.074	0.144	0.155	
	QPSK 20MHz 50%RB	Right Tilted	2535.0	22.69	23.0	1.074	0.083	0.089	
	QPSK 20MHz 50%RB	Left Cheek	2535.0	22.69	23.0	1.074	0.139	0.149	
	QPSK 20MHz 50%RB	Left Tilted	2535.0	22.69	23.0	1.074	0.071	0.076	

WLAN 2.4GHz – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11b	Right Cheek	06	2437	18.41	18.5	1.021	0.451	0.460
	802.11b	Right Tilted	06	2437	18.41	18.5	1.021	0.234	0.239
7.	802.11b	Left Cheek	06	2437	18.41	18.5	1.021	0.688	<b>0.702</b>
	802.11b	Left Tilted	06	2437	18.41	18.5	1.021	0.367	0.375
	802.11n (20MHz)	Right Cheek	06	2437	20.19	20.5	1.074	0.459	0.493
	802.11n (20MHz)	Right Tilted	06	2437	20.19	20.5	1.074	0.237	0.255
	802.11n (20MHz)	Left Cheek	06	2437	20.19	20.5	1.074	0.614	0.659
	802.11n (20MHz)	Left Tilted	06	2437	20.19	20.5	1.074	0.311	0.334

Bluetooth– Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	Bluetooth	Right Cheek		2480	8.66	9.0	1.081	0.155	0.168
	Bluetooth	Right Tilted		2480	8.66	9.0	1.081	0.071	0.077
8.	Bluetooth	Left Cheek		2480	8.66	9.0	1.081	0.232	<b>0.251</b>
	Bluetooth	Left Tilted		2480	8.66	9.0	1.081	0.152	0.164

WLAN 5.2GHz– Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
9.	802.11ac (40MHz)	Right Cheek	38	5190	15.96	16.0	1.009	0.643	<b>0.649</b>
	802.11ac (40MHz)	Right Tilted	38	5190	15.96	16.0	1.009	0.381	0.385
	802.11ac (40MHz)	Left Cheek	38	5190	15.96	16.0	1.009	0.550	0.555
	802.11ac (40MHz)	Left Tilted	38	5190	15.96	16.0	1.009	0.264	0.266

WLAN 5.3GHz– Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
10.	802.11n (40MHz)	Right Cheek	54	5270	14.39	14.5	1.026	0.670	<b>0.687</b>
	802.11n (40MHz)	Right Tilted	54	5270	14.39	14.5	1.026	0.398	0.408
	802.11n (40MHz)	Left Cheek	54	5270	14.39	14.5	1.026	0.560	0.574
	802.11n (40MHz)	Left Tilted	54	5270	14.39	14.5	1.026	0.275	0.282

WLAN 5.6GHz– Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11ac (80MHz)	Right Cheek	122	5610	16.35	16.5	1.035	0.560	0.580
	802.11ac (80MHz)	Right Tilted	122	5610	16.35	16.5	1.035	0.269	0.278
11.	802.11ac (80MHz)	Left Cheek	122	5610	16.35	16.5	1.035	0.698	<b>0.723</b>
	802.11ac (80MHz)	Left Tilted	122	5610	16.35	16.5	1.035	0.361	0.374



WLAN 5.8GHz– Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11n (20MHz)	Right Cheek	149	5745	15.05	15.5	1.109	0.746	0.827
	802.11n (20MHz)	Right Tilted	149	5745	15.05	15.5	1.109	0.389	0.431
	802.11n (20MHz)	Right Cheek	157	5785	13.66	14.0	1.081	0.751	0.812
	802.11n (20MHz)	Right Cheek	165	5825	12.54	13.0	1.112	0.738	0.820
12.	802.11n (20MHz)	Left Cheek	149	5745	15.05	15.5	1.109	0.756	<b>0.839</b>
	802.11n (20MHz)	Left Tilted	149	5745	15.05	15.5	1.109	0.394	0.437
	802.11n (20MHz)	Left Cheek	157	5785	13.66	14.0	1.081	0.725	0.784
	802.11n (20MHz)	Left Cheek	165	5825	12.54	13.0	1.112	0.731	0.813

**Remark:** Per KDB 447498 D01 v06, if the highest output channel SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.

**Body-worn SAR**

<b>GSM850 – Body SAR Test (Gap: 10mm)</b>									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
13.	GSM	Back	190	836.6	32.93	33.0	1.016	0.507	<b>0.515</b>
	GSM	Front	190	836.6	32.93	33.0	1.016	0.343	0.349

<b>GSM1900 – Body SAR Test (Gap: 10mm)</b>									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
14.	GSM	Back	661	1880	30.21	30.5	1.069	0.667	<b>0.713</b>
	GSM	Front	661	1880	30.21	30.5	1.069	0.469	0.501

<b>WCDMA Band 2 – Body SAR Test (Gap: 10mm)</b>									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
15.	RMC 12.2k	Back Side	9538	1907.6	22.84	23.0	1.038	0.738	<b>0.766</b>
	RMC 12.2k	Front Face	9538	1907.6	22.84	23.0	1.038	0.553	0.574

<b>WCDMA Band 5 – Body SAR Test (Gap: 10mm)</b>									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
16.	RMC 12.2k	Back Side	4132	826.4	22.74	23.0	1.062	0.344	<b>0.365</b>
	RMC 12.2k	Front Side	4132	826.4	22.74	23.0	1.062	0.233	0.247

LTE Band 4–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power	Rated Limit	Scaling Factor	SAR1g	Scaled SAR1g
	Modulation, Bandwidth, RB	Body	MHz	(dBm)	(dBm)		(W/kg)	(W/kg)
17.	QPSK 20MHz 1RB	Back Side	1732.5	23.36	23.5	1.033	0.771	<b>0.796</b>
	QPSK 20MHz 1RB	Front Side	1732.5	23.36	23.5	1.033	0.467	0.482
	QPSK 20MHz 50%RB	Back Side	1732.5	23.36	23.5	1.033	0.611	0.631
	QPSK 20MHz 50%RB	Front Side	1732.5	23.36	23.5	1.033	0.390	0.403

LTE Band 7–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power	Rated Limit	Scaling Factor	SAR1g	Scaled SAR1g
	Modulation, Bandwidth, RB	Body	MHz	(dBm)	(dBm)		(W/kg)	(W/kg)
18.	QPSK 10MHz 1RB	Back Face	2505.0	23.19	23.5	1.074	0.737	<b>0.792</b>
	QPSK 10MHz 1RB	Front Face	2505.0	23.19	23.5	1.074	0.698	0.750
	QPSK 10MHz 50%RB	Back Face	2505.0	23.19	23.5	1.074	0.685	0.736
	QPSK 10MHz 50%RB	Front Face	2505.0	23.19	23.5	1.074	0.641	0.688
	QPSK 20MHz 1RB	Back Side	2535.0	22.69	23.0	1.074	0.687	0.738
	QPSK 20MHz 1RB	Front Side	2535.0	22.69	23.0	1.074	0.567	0.609
	QPSK 20MHz 50%RB	Back Side	2535.0	22.69	23.0	1.074	0.658	0.707
	QPSK 20MHz 50%RB	Front Side	2535.0	22.69	23.0	1.074	0.543	0.583

WLAN 2.4GHz –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11b	Back Side	06	2437	18.41	18.5	1.021	0.380	0.388
	802.11b	Front Side	06	2437	18.41	18.5	1.021	0.160	0.163
19.	802.11n (20MHz)	Back Face	06	2437	20.19	20.5	1.074	0.387	<b>0.416</b>
	802.11n (20MHz)	Front Face	06	2437	20.19	20.5	1.074	0.124	0.133

Bluetooth–Body SAR Test(Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			MHz						
20.	Bluetooth	Back Face	2480		8.66	9.0	1.081	0.257	<b>0.278</b>
	Bluetooth	Front Face	2480		8.66	9.0	1.081	0.091	0.098

WLAN 5.2GHz –Body SAR Test(Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
21.	802.11ac (40MHz)	Back Side	38	5190	15.96	16.0	1.009	0.536	<b>0.541</b>
	802.11ac (40MHz)	Front Side	38	5190	15.96	16.0	1.009	0.328	0.331

WLAN 5.3GHz –Body SAR Test(Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
22.	802.11n (40MHz)	Back Side	54	5270	14.39	14.5	1.026	0.568	<b>0.583</b>
	802.11n (40MHz)	Front Side	54	5270	14.39	14.5	1.026	0.485	0.497

WLAN 5.6GHz–Body SAR Test(Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
23.	802.11ac (80MHz)	Back Side	122	5610	16.35	16.5	1.035	0.458	<b>0.474</b>
	802.11ac (80MHz)	Front Side	122	5610	16.35	16.5	1.035	0.387	0.401

WLAN 5.8GHz –Body SAR Test(Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
24.	802.11n (20MHz)	Back Side	149	5745	15.05	15.5	1.109	0.577	<b>0.640</b>
	802.11n (20MHz)	Front Side	149	5745	15.05	15.5	1.109	0.564	0.626

**Hotspot SAR**

<b>GSM850 – Body SAR Test (Gap: 10mm)</b>									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
25.	GPRS_4TX	Back Face	128	824.2	30.27	30.5	1.054	0.477	<b>0.503</b>
	GPRS_4TX	Front Face	128	824.2	30.27	30.5	1.054	0.305	0.322
	GPRS_4TX	Right Side	128	824.2	30.27	30.5	1.054	0.110	0.116
	GPRS_4TX	Left Side	128	824.2	30.27	30.5	1.054	0.063	0.066
	GPRS_4TX	Bottom Side	128	824.2	30.27	30.5	1.054	0.311	0.328

<b>GSM1900 – Body SAR Test (Gap: 10mm)</b>									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
26.	GPRS_4TX	Back Face	512	1850.2	26.93	27.5	1.140	0.752	<b>0.857</b>
	GPRS_4TX	Front Face	512	1850.2	26.93	27.5	1.140	0.464	0.529
	GPRS_4TX	Right Side	512	1850.2	26.93	27.5	1.140	0.133	0.152
	GPRS_4TX	Left Side	512	1850.2	26.93	27.5	1.140	0.051	0.058
	GPRS_4TX	Bottom Side	512	1850.2	26.93	27.5	1.140	0.660	0.753
	GPRS_4TX	Back Face	661	1880.0	27.36	27.5	1.033	0.684	0.706
	GPRS_4TX	Back Face	810	1909.8	26.98	27.5	1.127	0.697	0.786

<b>WCDMA Band 2 – Body SAR Test (Gap: 10mm)</b>									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
27.	RMC 12.2k	Back Face	9538	1907.6	22.84	23.0	1.038	0.738	<b>0.766</b>
	RMC 12.2k	Front Face	9538	1907.6	22.84	23.0	1.038	0.553	0.574
	RMC 12.2k	Right Side	9538	1907.6	22.84	23.0	1.038	0.187	0.194
	RMC 12.2k	Left Side	9538	1907.6	22.84	23.0	1.038	0.067	0.070
	RMC 12.2k	Bottom Side	9538	1907.6	22.84	23.0	1.038	0.589	0.611

WCDMA Band 5 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
28.	RMC 12.2k	Back Face	4132	826.4	22.74	23.0	1.062	0.344	<b>0.365</b>
	RMC 12.2k	Front Face	4132	826.4	22.74	23.0	1.062	0.233	0.247
	RMC 12.2k	Right Side	4132	826.4	22.74	23.0	1.062	0.185	0.196
	RMC 12.2k	Left Side	4132	826.4	22.74	23.0	1.062	0.043	0.046
	RMC 12.2k	Bottom Side	4132	826.4	22.74	23.0	1.062	0.259	0.275

LTE Band 4–Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)	
	Modulation, Bandwidth, RB		MHz						
29.	QPSK 20MHz 1RB	Back Face	1732.5	23.36	23.5	1.033	0.771	<b>0.796</b>	
	QPSK 20MHz 1RB	Front Face	1732.5	23.36	23.5	1.033	0.467	0.482	
	QPSK 20MHz 1RB	Right Side	1732.5	23.36	23.5	1.033	0.161	0.166	
	QPSK 20MHz 1RB	Left Side	1732.5	23.36	23.5	1.033	0.044	0.045	
	QPSK 20MHz 1RB	Bottom Side	1732.5	23.36	23.5	1.033	0.693	0.716	
	QPSK 20MHz 50%RB	Back Face	1732.5	23.36	23.5	1.033	0.611	0.631	
	QPSK 20MHz 50%RB	Front Face	1732.5	23.36	23.5	1.033	0.390	0.403	
	QPSK 20MHz 50%RB	Right Side	1732.5	23.36	23.5	1.033	0.139	0.144	
	QPSK 20MHz 50%RB	Left Side	1732.5	23.36	23.5	1.033	0.039	0.040	
	QPSK 20MHz 50%RB	Bottom Side	1732.5	23.36	23.5	1.033	0.526	0.543	

LTE Band 7–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
30.	QPSK 10MHz 1RB	Back Face	2505.0	23.19	23.5	1.074	0.737	<b>0.792</b>
	QPSK 10MHz 1RB	Front Face	2505.0	23.19	23.5	1.074	0.698	0.750
	QPSK 10MHz 1RB	Right Side	2505.0	23.19	23.5	1.074	0.282	0.303
	QPSK 10MHz 1RB	Left Side	2505.0	23.19	23.5	1.074	0.208	0.223
	QPSK 10MHz 1RB	Bottom side	2505.0	23.19	23.5	1.074	0.651	0.699
	QPSK 10MHz 50%RB	Back Face	2505.0	23.19	23.5	1.074	0.685	0.736
	QPSK 10MHz 50%RB	Front Face	2505.0	23.19	23.5	1.074	0.641	0.688
	QPSK 10MHz 50%RB	Right Side	2505.0	23.19	23.5	1.074	0.276	0.296
	QPSK 10MHz 50%RB	Left Side	2505.0	23.19	23.5	1.074	0.187	0.201
	QPSK 10MHz 50%RB	Bottom Side	2505.0	23.19	23.5	1.074	0.628	0.674
	QPSK 20MHz 1RB	Back Face	2535.0	22.69	23.0	1.074	0.687	0.738
	QPSK 20MHz 1RB	Front Face	2535.0	22.69	23.0	1.074	0.567	0.609
	QPSK 20MHz 1RB	Right Side	2535.0	22.69	23.0	1.074	0.269	0.289
	QPSK 20MHz 1RB	Left Side	2535.0	22.69	23.0	1.074	0.176	0.189
	QPSK 20MHz 1RB	Bottom side	2535.0	22.69	23.0	1.074	0.535	0.575
	QPSK 20MHz 50%RB	Back Face	2535.0	22.69	23.0	1.074	0.658	0.707
	QPSK 20MHz 50%RB	Front Face	2535.0	22.69	23.0	1.074	0.543	0.583
	QPSK 20MHz 50%RB	Right Side	2535.0	22.69	23.0	1.074	0.244	0.262
	QPSK 20MHz 50%RB	Left Side	2535.0	22.69	23.0	1.074	0.152	0.163
	QPSK 20MHz 50%RB	Bottom Side	2535.0	22.69	23.0	1.074	0.509	0.547

WLAN 2.4GHz –Body SAR Test(Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11b	Back Face	06	2437	18.41	18.5	1.021	0.380	0.388
	802.11b	Front Face	06	2437	18.41	18.5	1.021	0.160	0.163
	802.11b	Right Side	06	2437	18.41	18.5	1.021	0.182	0.186
	802.11b	Top Side	06	2437	18.41	18.5	1.021	0.069	0.070
31.	802.11n (20MHz)	Back Face	06	2437	20.19	20.5	1.074	0.387	<b>0.416</b>
	802.11n (20MHz)	Front Face	06	2437	20.19	20.5	1.074	0.124	0.133
	802.11n (20MHz)	Right Side	06	2437	20.19	20.5	1.074	0.188	0.202
	802.11n (20MHz)	Top Side	06	2437	20.19	20.5	1.074	0.112	0.120

Bluetooth–Body SAR Test(Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
32.	Bluetooth	Back Face		2480	8.66	9.0	1.081	0.257	<b>0.278</b>
	Bluetooth	Front Face		2480	8.66	9.0	1.081	0.091	0.098
	Bluetooth	Right Side		2480	8.66	9.0	1.081	0.248	0.268
	Bluetooth	Top Side		2480	8.66	9.0	1.081	0.106	0.115

WLAN 5.2GHz –Body SAR Test(Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
33.	802.11ac (40MHz)	Back Side	38	5190	15.96	16.0	1.009	0.536	<b>0.541</b>
	802.11ac (40MHz)	Front Side	38	5190	15.96	16.0	1.009	0.328	0.331
	802.11ac (40MHz)	Right side	38	5190	15.96	16.0	1.009	0.292	0.295
	802.11ac (40MHz)	Top Side	38	5190	15.96	16.0	1.009	0.373	0.376

WLAN 5.3GHz –Body SAR Test(Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
34.	802.11n (40MHz)	Back Side	54	5270	14.39	14.5	1.026	0.568	<b>0.583</b>
	802.11n (40MHz)	Front Side	54	5270	14.39	14.5	1.026	0.485	0.497
	802.11n (40MHz)	Right side	54	5270	14.39	14.5	1.026	0.298	0.306
	802.11n (40MHz)	Top Side	54	5270	14.39	14.5	1.026	0.358	0.367



WLAN 5.6GHz–Body SAR Test(Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
35.	802.11ac (80MHz)	Back Side	122	5610	16.35	16.5	1.035	0.458	<b>0.474</b>
	802.11ac (80MHz)	Front Side	122	5610	16.35	16.5	1.035	0.387	0.401
	802.11ac (80MHz)	Right side	122	5610	16.35	16.5	1.035	0.316	0.327
	802.11ac (80MHz)	Top Side	122	5610	16.35	16.5	1.035	0.389	0.403

WLAN 5.8GHz –Body SAR Test(Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
36.	802.11n (20MHz)	Back Side	149	5745	15.05	15.5	1.109	0.577	<b>0.640</b>
	802.11n (20MHz)	Front Side	149	5745	15.05	15.5	1.109	0.564	0.626
	802.11n (20MHz)	Right side	149	5745	15.05	15.5	1.109	0.404	0.448
	802.11n (20MHz)	Top Side	149	5745	15.05	15.5	1.109	0.471	0.522

**Remark:** Per KDB 447498 D01 v06, if the highest output channel SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.

### 9.3 Simultaneous Multi-band Transmission SAR Analysis

#### List of Mode for Simultaneous Multi-band Transmission

No.	Configurations	Head SAR	Body SAR
1	GSM(Voice/Data) + WLAN(2.4GHz)(Data)	Yes	Yes
2	WCDMA (Voice/Data)+ WLAN (2.4GHz)(Data)	Yes	Yes
3	LTE(Data) + WLAN(2.4GHz)(Data)	Yes	Yes
4	GSM(Voice/Data) + Bluetooth(Data)	Yes	Yes
5	WCDMA (Voice/Data) + Bluetooth(Data)	Yes	Yes
6	LTE(Data) + Bluetooth(Data)	Yes	Yes

#### Remark:

1. GSM ,WCDMA and LTE share the same antenna, and cannot transmit simultaneously.
2. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
3. According to the KDB 447498 D01 v06, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:  

$$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})}/x] \text{ W/kg}$$
for test separation distances  $\leq 50 \text{ mm}$ ;  
where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.  
For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01 v06 as below:
4. The maximum SAR summation is calculated based on the same configuration and test position.

**Head SAR****WWAN and WLAN**

Position	WWAN		WLAN(2.4G)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Right Cheek	GSM	<b>0.486</b>	0.493	0.979
Right Tilted	GSM	0.260	0.255	0.515
Left Cheek	GSM	0.346	<b>0.702</b>	<b>1.048</b>
Left Tilted	GSM	0.181	0.375	0.556
Right Cheek	WCDMA	0.275	0.493	0.768
Right Tilted	WCDMA	0.156	0.255	0.411
Left Cheek	WCDMA	<b>0.276</b>	<b>0.702</b>	0.978
Left Tilted	WCDMA	0.160	0.375	0.535
Right Cheek	LTE	<b>0.168</b>	0.493	0.661
Right Tilted	LTE	0.095	0.255	0.350
Left Cheek	LTE	0.158	<b>0.702</b>	0.860
Left Tilted	LTE	0.082	0.375	0.457

**WWAN and Bluetooth**

Position	WWAN		Bluetooth	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Right Cheek	GSM	<b>0.486</b>	0.168	<b>0.654</b>
Right Tilted	GSM	0.260	0.077	0.337
Left Cheek	GSM	0.346	<b>0.251</b>	0.597
Left Tilted	GSM	0.181	0.164	0.345
Right Cheek	WCDMA	0.275	0.168	0.443
Right Tilted	WCDMA	0.156	0.077	0.233
Left Cheek	WCDMA	<b>0.276</b>	<b>0.251</b>	0.527
Left Tilted	WCDMA	0.160	0.164	0.324
Right Cheek	LTE	<b>0.168</b>	0.168	0.336
Right Tilted	LTE	0.095	0.077	0.172
Left Cheek	LTE	0.158	<b>0.251</b>	0.409
Left Tilted	LTE	0.082	0.164	0.246

**WWAN and WLAN**

	WWAN		WLAN(5GHz)	Summed SAR (W/kg)
Position	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Right Cheek	GSM	<b>0.486</b>	0.827	<b>1.313</b>
Right Tilted	GSM	0.260	0.431	0.691
Left Cheek	GSM	0.346	<b>0.839</b>	1.185
Left Tilted	GSM	0.181	0.437	0.618
Right Cheek	WCDMA	0.275	0.827	1.102
Right Tilted	WCDMA	0.156	0.431	0.587
Left Cheek	WCDMA	<b>0.276</b>	<b>0.839</b>	1.115
Left Tilted	WCDMA	0.160	0.437	0.597
Right Cheek	LTE	<b>0.168</b>	0.827	0.995
Right Tilted	LTE	0.095	0.431	0.526
Left Cheek	LTE	0.158	<b>0.839</b>	0.997
Left Tilted	LTE	0.082	0.437	0.519

**Body-worn SAR****WWAN and WLAN**

Position	WWAN		WLAN(2.4GHz)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM	<b>0.713</b>	<b>0.416</b>	1.129
Front	GSM	0.501	0.163	0.664
Back	WCDMA	<b>0.766</b>	<b>0.416</b>	1.182
Front	WCDMA	0.574	0.163	0.737
Back	LTE	<b>0.796</b>	<b>0.416</b>	<b>1.212</b>
Front	LTE	0.750	0.163	0.913

**WWAN and Bluetooth**

Position	WWAN		Bluetooth	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM	<b>0.713</b>	<b>0.278</b>	0.991
Front	GSM	0.501	0.098	0.599
Back	WCDMA	<b>0.766</b>	<b>0.278</b>	1.044
Front	WCDMA	0.574	0.098	0.672
Back	LTE	<b>0.796</b>	<b>0.278</b>	<b>1.074</b>
Front	LTE	0.750	0.098	0.848

**WWAN and Bluetooth**

Position	WWAN		WLAN(5GHz)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM	<b>0.713</b>	<b>0.640</b>	1.353
Front	GSM	0.501	0.626	1.127
Back	WCDMA	<b>0.766</b>	<b>0.640</b>	1.406
Front	WCDMA	0.574	0.626	1.200
Back	LTE	<b>0.796</b>	<b>0.640</b>	<b>1.436</b>
Front	LTE	0.750	0.626	1.376

**Hotspot SAR****WWAN and WLAN**

Position	WWAN		WLAN(2.4GHz)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM	<b>0.857</b>	<b>0.416</b>	<b>1.273</b>
Front	GSM	0.529	0.163	0.692
Right side	GSM	0.152	0.202	0.354
Left side	GSM	0.058	--	0.058
Bottom side	GSM	0.753	--	0.753
Top side	GSM	--	0.120	0.120
Back	WCDMA	<b>0.766</b>	<b>0.416</b>	1.182
Front	WCDMA	0.574	0.163	0.737
Right side	WCDMA	0.196	0.202	0.398
Left side	WCDMA	0.070	--	0.070
Bottom side	WCDMA	0.611	--	0.611
Top side	WCDMA	--	0.120	0.120
Back	LTE	<b>0.796</b>	<b>0.416</b>	1.212
Front	LTE	0.750	0.163	0.913
Right side	LTE	0.303	0.202	0.505
Left side	LTE	0.223	--	0.223
Bottom side	LTE	0.716	--	0.716
Top side	LTE	--	0.120	0.120

**WWAN and Bluetooth**

Position	WWAN		Bluetooth	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM	<b>0.857</b>	<b>0.278</b>	<b>1.135</b>
Front	GSM	0.529	0.098	0.627
Right side	GSM	0.152	0.268	0.420
Left side	GSM	0.058	--	0.058
Bottom side	GSM	0.753	--	0.753
Top side	GSM	--	0.115	0.115
Back	WCDMA	<b>0.766</b>	<b>0.278</b>	1.044
Front	WCDMA	0.574	0.098	0.672
Right side	WCDMA	0.196	0.268	0.464
Left side	WCDMA	0.070	--	0.070
Bottom side	WCDMA	0.611	--	0.611
Top side	WCDMA	--	0.115	0.115
Back	LTE	<b>0.796</b>	<b>0.278</b>	1.074
Front	LTE	0.750	0.098	0.848
Right side	LTE	0.303	0.268	0.571
Left side	LTE	0.223	--	0.223
Bottom side	LTE	0.716	--	0.716
Top side	LTE	--	0.115	0.115

**WWAN and WLAN**

Position	WWAN		WLAN(5GHz)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM	<b>0.857</b>	<b>0.640</b>	<b>1.497</b>
Front	GSM	0.529	0.626	1.155
Right side	GSM	0.152	0.448	0.600
Left side	GSM	0.058	--	0.058
Bottom side	GSM	0.753	--	0.753
Top side	GSM	--	0.522	0.522
Back	WCDMA	<b>0.766</b>	<b>0.640</b>	1.406
Front	WCDMA	0.574	0.626	1.200
Right side	WCDMA	0.196	0.448	0.644
Left side	WCDMA	0.070	--	0.070
Bottom side	WCDMA	0.611	--	0.611
Top side	WCDMA	--	0.522	0.522
Back	LTE	<b>0.796</b>	<b>0.640</b>	1.436
Front	LTE	0.750	0.626	1.376
Right side	LTE	0.303	0.448	0.751
Left side	LTE	0.223	--	0.223
Bottom side	LTE	0.716	--	0.716
Top side	LTE	--	0.522	0.522



## 10. Measurement Uncertainty

### 10.1 Uncertainty for SAR Test

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
<b>Measurement System</b>									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	$\infty$
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_{-Cp})^{1/2}$	$(1_{-Cp})^{1/2}$	1.02	1.02	$\infty$
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	$\infty$
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	$\infty$
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
RF ambient Conditions – Noise	E.6.1	0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
RF ambient Conditions - Reflections	E.6.1	0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$
<b>Test Sample Related</b>									
Test sample positioning	E.4.2	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1	5.00	N	1	1	1	5.00	5.00	
Output power Variation - SAR drift measurement	E.2.9	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	$\infty$
SAR scaling	E6.5	0.0	R	$\sqrt{3}$	1	1	0.0	0.0	$\infty$
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Uncertainty in SAR correction for deviations in permittivity and conductivity	E3.2	1.9	R	$\sqrt{3}$	1	0.84	1.10	0.90	$\infty$

Liquid conductivity - deviation from target value	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	$\infty$
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	$\infty$
Liquid permittivity - deviation from target value	E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	$\infty$
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	$\infty$
Combined Standard Uncertainty			RSS				10.20	10.00	
Expanded Uncertainty (95% Confidence interval)			K=2				20.40	20.00	

## Annex A. Plots of System Performance Check

# MEASUREMENT 1

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 7 minutes 21 seconds


E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.67; Calibrated: 2021-07-16

### A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW750
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	750.000000
<b>Relative Permittivity (real part)</b>	41.020574
<b>Conductivity (S/m)</b>	0.870583
<b>Power Variation (%)</b>	0.038363
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

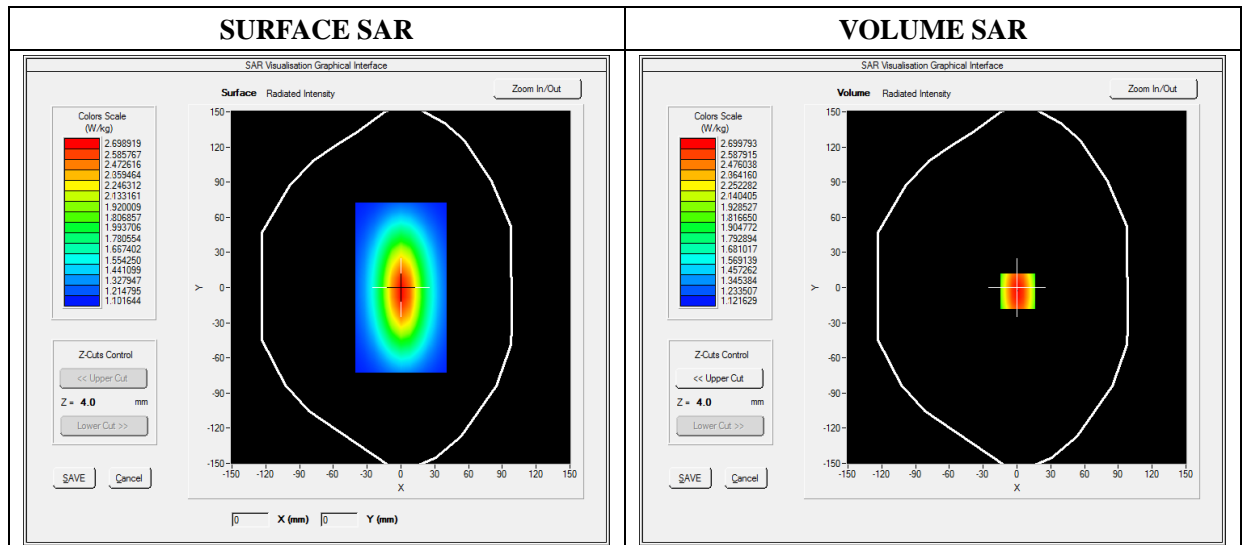


**Maximum location: X=0.00, Y=0.00**

<b>SAR 10g (W/Kg)</b>	<b>1.042744</b>
<b>SAR 1g (W/Kg)</b>	<b>2.180534</b>

**Z Axis Scan**

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>	<b>24.00</b>	<b>29.00</b>
<b>SAR (W/Kg)</b>	<b>0.0000</b>	<b>2.3634</b>	<b>1.8023</b>	<b>1.4523</b>	<b>1.2514</b>	<b>1.1005</b>	<b>1.0245</b>

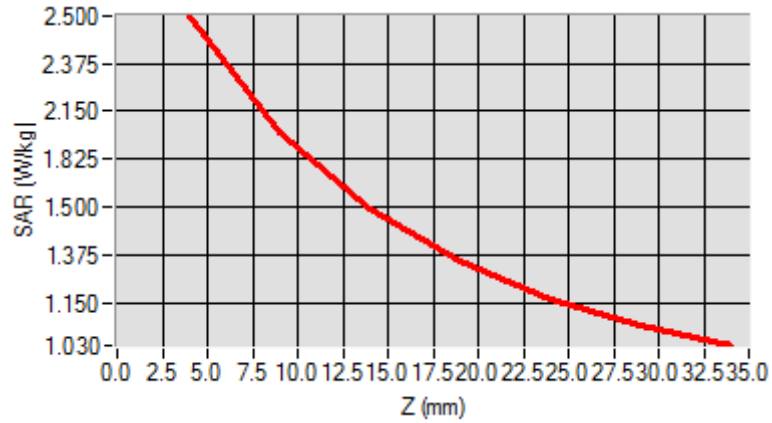

<b>3D screen shot</b>	<b>Hot spot position</b>

# MEASUREMENT 2

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 7 minutes 21 seconds


E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.71; Calibrated: 2021-07-16

## A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW835
<b>Signal</b>	Duty Cycle 1:1

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	835.000000
<b>Relative Permittivity (real part)</b>	42.750245
<b>Conductivity (S/m)</b>	0.911245
<b>Power Variation (%)</b>	0.428437
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

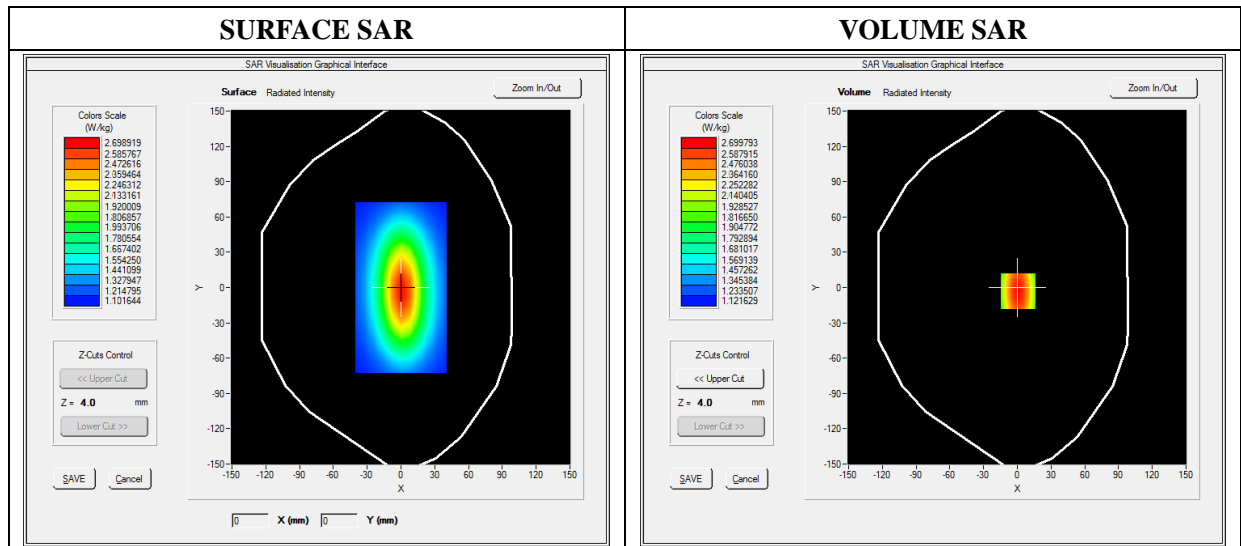




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	1.519489
SAR 1g (W/Kg)	2.511253

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.4900	1.8942	1.4811	1.3541	1.1123	1.0539

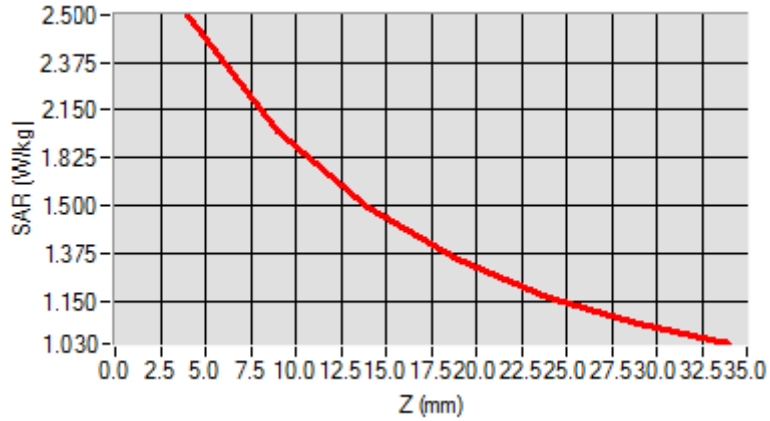

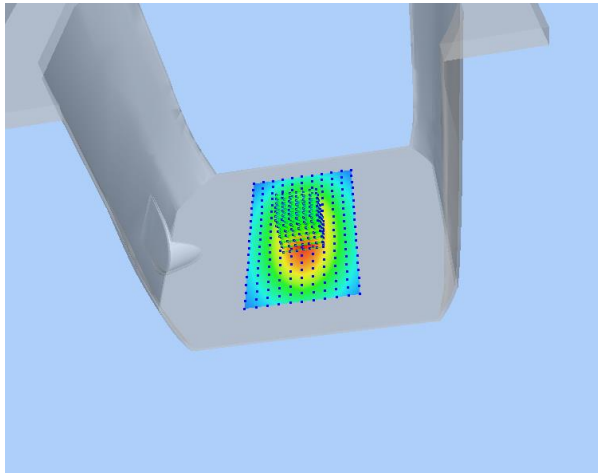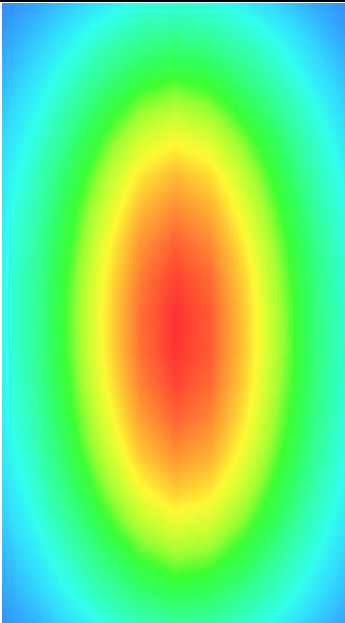3D screen shot	Hot spot position
	

# MEASUREMENT 3

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.11; Calibrated: 2021-07-16

## A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW1800
<b>Signal</b>	CW (Crest factor: 1.0)

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1800.000000
<b>Relative Permittivity (real part)</b>	41.431090
<b>Conductivity (S/m)</b>	1.412510
<b>Power Variation (%)</b>	1.041232
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

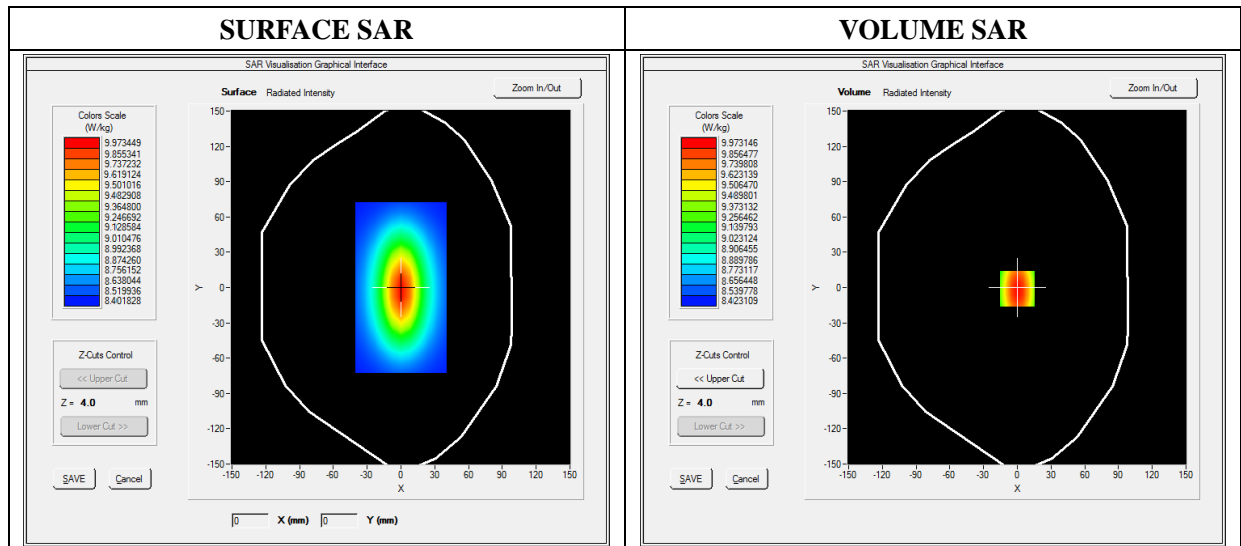


Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	5.081252
SAR 1g (W/Kg)	9.461217

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.3455	7.1125	5.1026	3.425	3.0242	2.1125

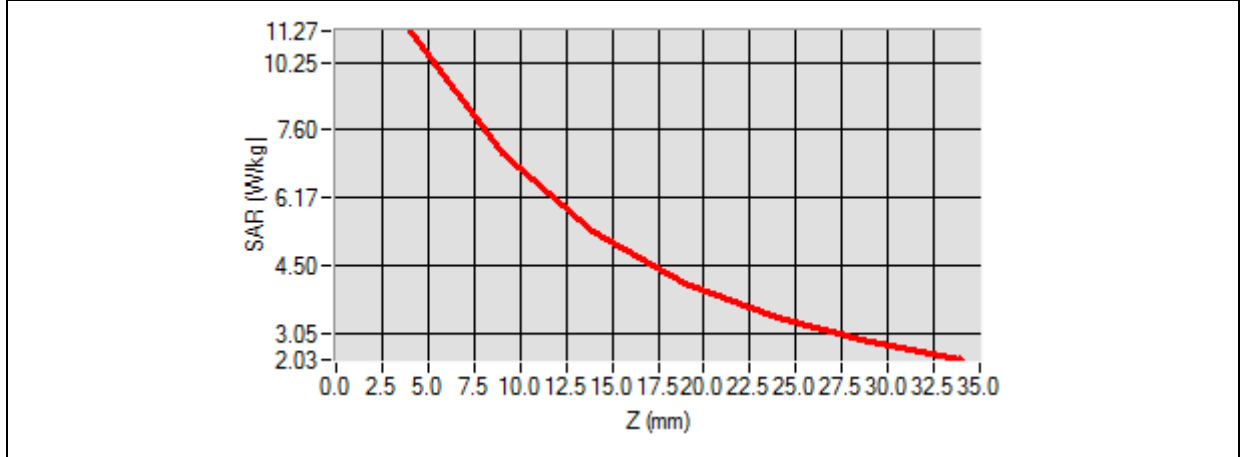

3D screen shot	Hot spot position



# MEASUREMENT 4

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.21; Calibrated: 2021-07-16

## A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW1900
<b>Signal</b>	Duty Cycle 1:1

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1900.000000
<b>Relative Permittivity (real part)</b>	42.060124
<b>Conductivity (S/m)</b>	1.413607
<b>Power Variation (%)</b>	1.022540
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

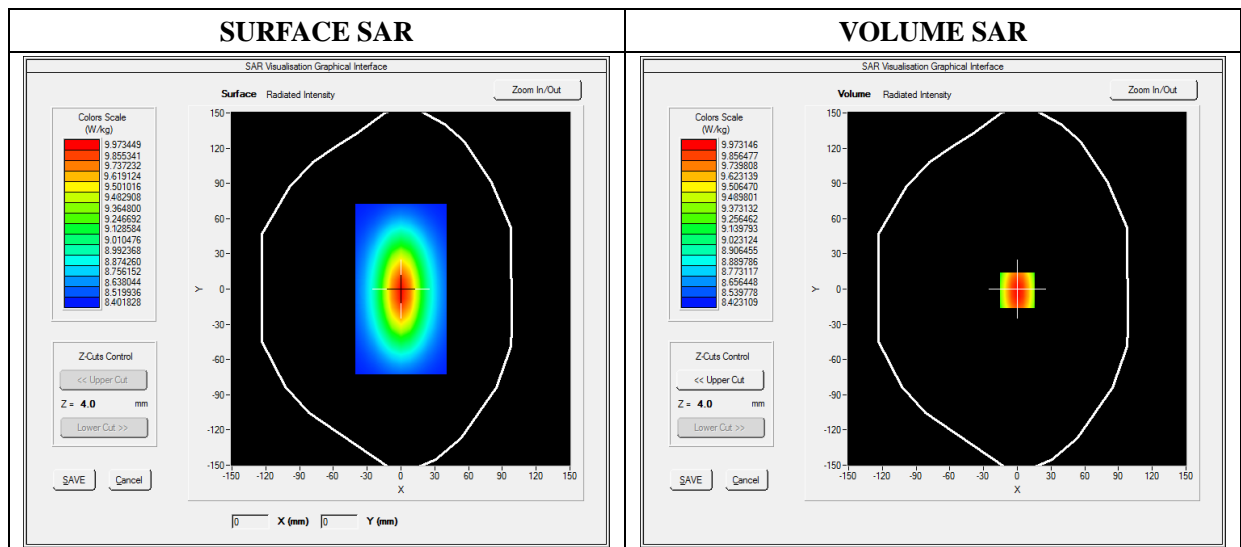


Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	5.174526
SAR 1g (W/Kg)	9.913214

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.2354	6.8400	5.0121	4.1189	3.0522	2.8424

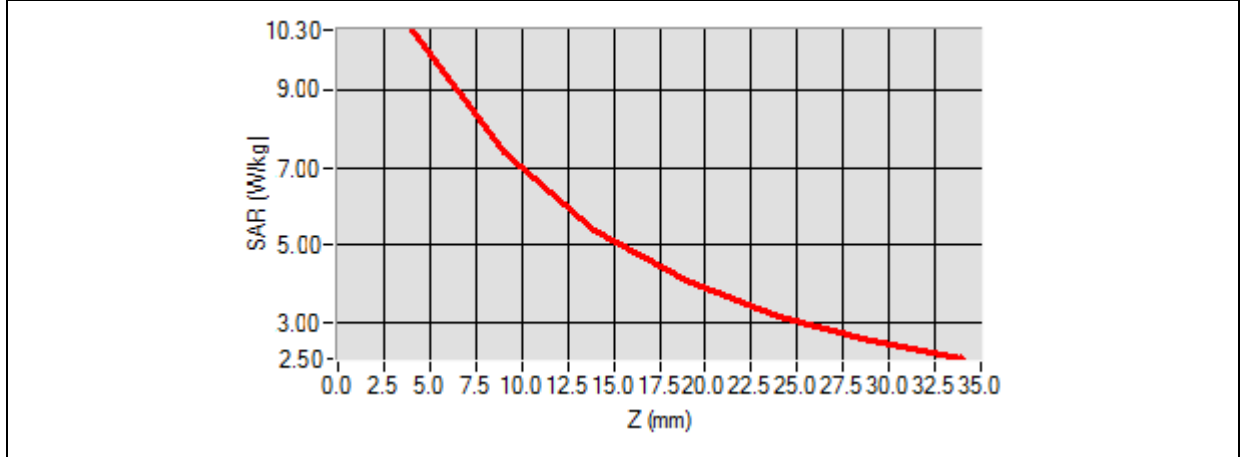

3D screen shot	Hot spot position

# MEASUREMENT 5

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.29; Calibrated: 2021-07-16

## A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW2450
<b>Signal</b>	Duty Cycle 1:1

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	2450.000000
<b>Relative Permittivity (real part)</b>	38.451086
<b>Conductivity (S/m)</b>	1.870236
<b>Power Variation (%)</b>	1.141452
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

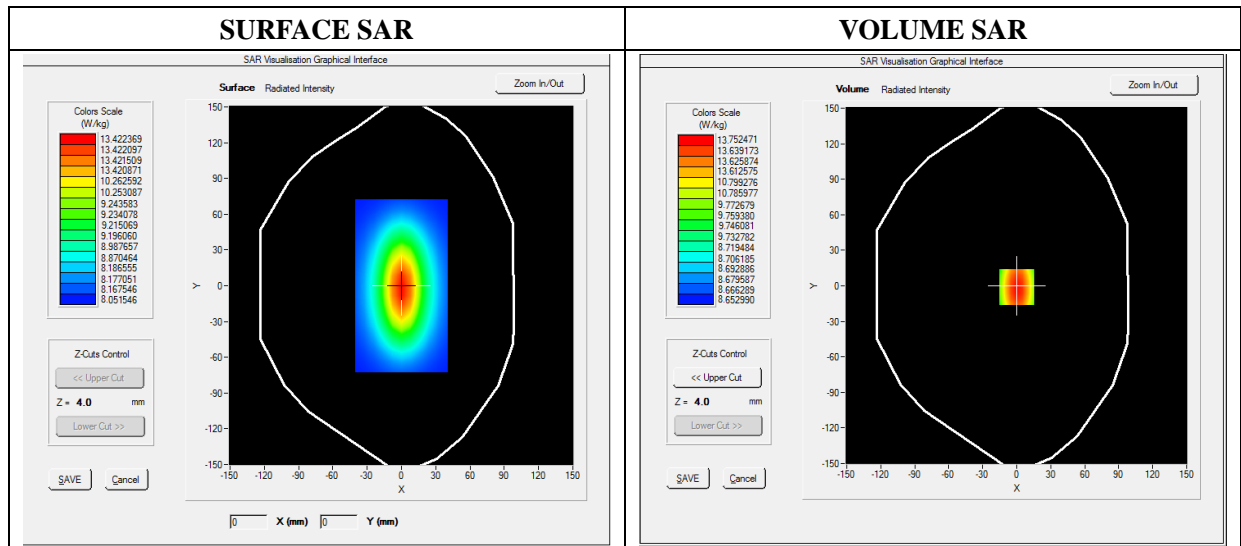


**Maximum location: X=0.00, Y=0.00**

<b>SAR 10g (W/Kg)</b>	<b>8.210711</b>
-----------------------	-----------------

<b>SAR 1g (W/Kg)</b>	<b>13.752408</b>
----------------------	------------------

**Z Axis Scan**

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>	<b>24.00</b>	<b>29.00</b>
<b>SAR (W/Kg)</b>	<b>0.0000</b>	<b>14.1034</b>	<b>12.0012</b>	<b>10.2624</b>	<b>7.4715</b>	<b>5.9022</b>	<b>4.5114</b>

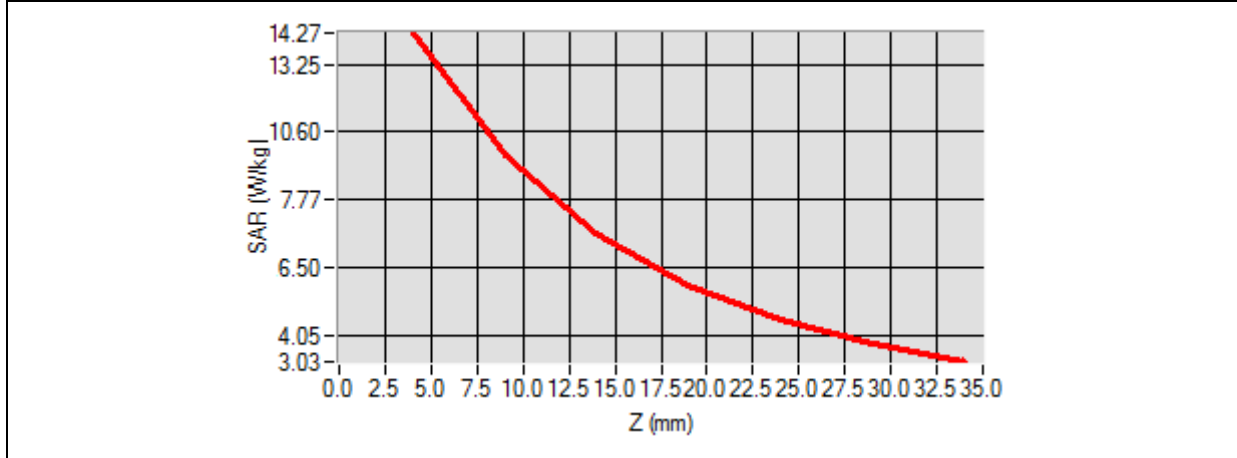

<b>3D screen shot</b>	<b>Hot spot position</b>

# MEASUREMENT 6

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.22; Calibrated: 2021-07-16

### A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW2600
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	2600.000000
<b>Relative Permittivity (real part)</b>	38.934092
<b>Conductivity (S/m)</b>	2.043182
<b>Power Variation (%)</b>	0.886021
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

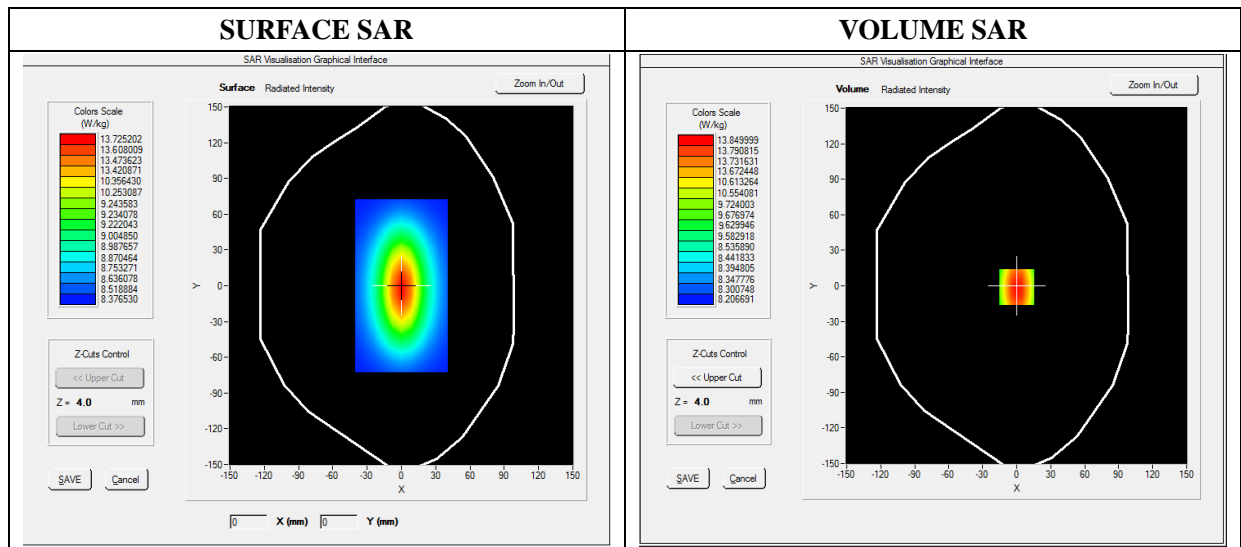


**Maximum location: X=0.00, Y=0.00**

<b>SAR 10g (W/Kg)</b>	<b>8.230801</b>
-----------------------	-----------------

<b>SAR 1g (W/Kg)</b>	<b>13.539282</b>
----------------------	------------------

**Z Axis Scan**

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>	<b>24.00</b>	<b>29.00</b>
<b>SAR (W/Kg)</b>	<b>0.0000</b>	<b>14.0426</b>	<b>12.1354</b>	<b>10.2965</b>	<b>7.4854</b>	<b>5.9354</b>	<b>4.5186</b>

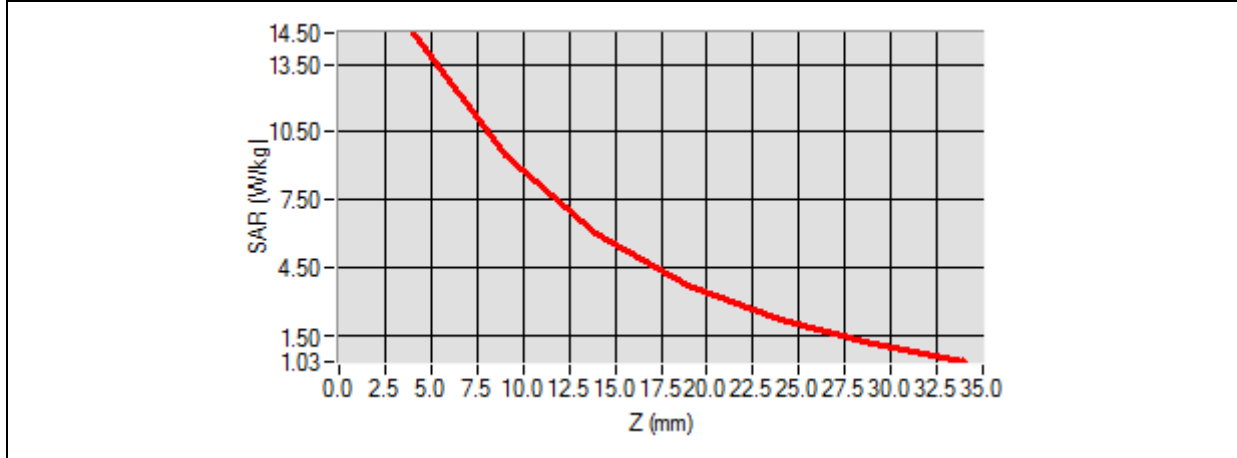

<b>3D screen shot</b>	<b>Hot spot position</b>

# MEASUREMENT 7

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.91; Calibrated: 2021-07-16

## A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Zoom Scan</b>	dx=4mm dy=4mm dz=2mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW5200
<b>Signal</b>	CW (Crest factor: 1.0)

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	5200.000000
<b>Relative Permittivity (real part)</b>	37.632911
<b>Conductivity (S/m)</b>	4.943426
<b>Power Variation (%)</b>	-0.940000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

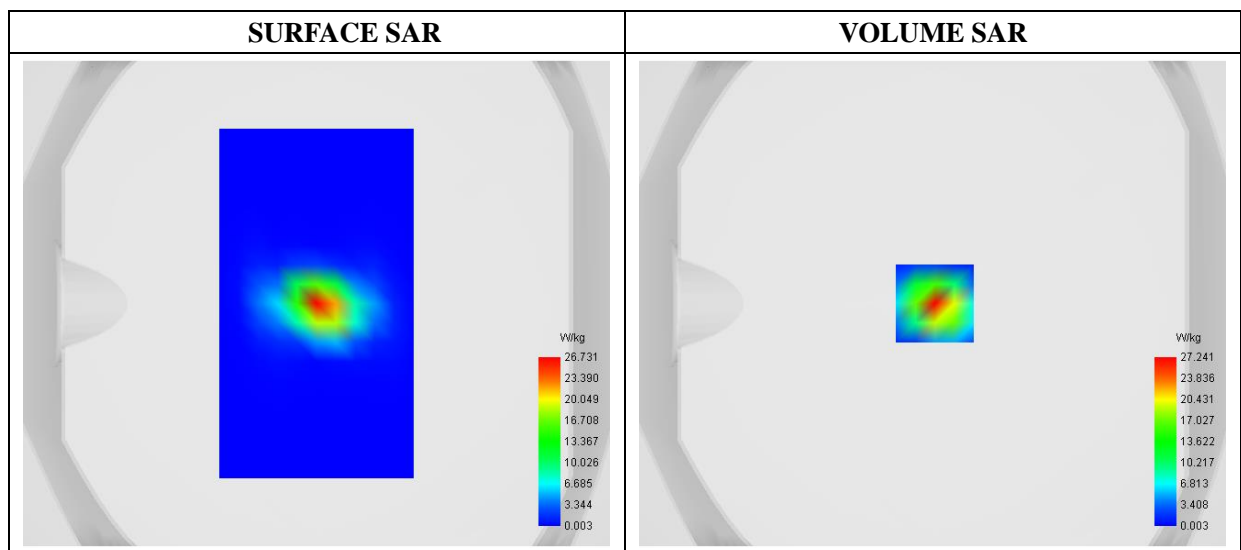

**Maximum location: X=1.00, Y=0.00**

<b>SAR 10g (W/Kg)</b>	<b>5.910334</b>
<b>SAR 1g (W/Kg)</b>	<b>16.746226</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>2.00</b>	<b>7.00</b>	<b>12.00</b>	<b>17.00</b>	<b>22.00</b>	<b>27.00</b>
<b>SAR (W/Kg)</b>	<b>41.7264</b>	<b>27.2408</b>	<b>6.5746</b>	<b>1.6234</b>	<b>0.3765</b>	<b>0.0793</b>	<b>0.0129</b>

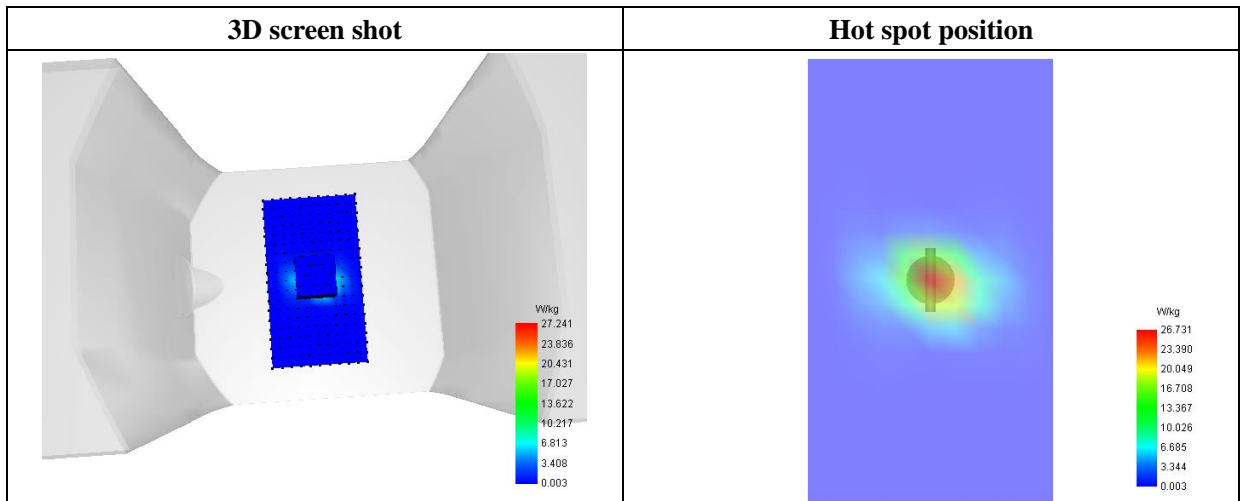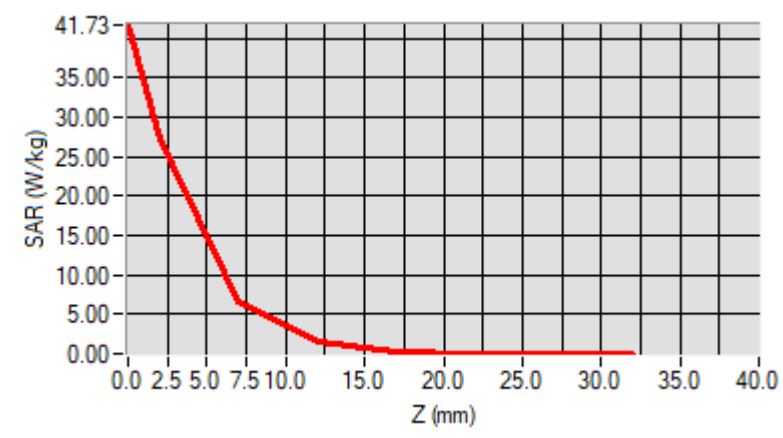



# MEASUREMENT 8

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.12; Calibrated: 2021-07-16

## A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Zoom Scan</b>	dx=4mm dy=4mm dz=2mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW5400
<b>Signal</b>	CW (Crest factor: 1.0)

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	5400.000000
<b>Relative Permittivity (real part)</b>	36.960839
<b>Conductivity (S/m)</b>	5.370192
<b>Power Variation (%)</b>	1.020000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

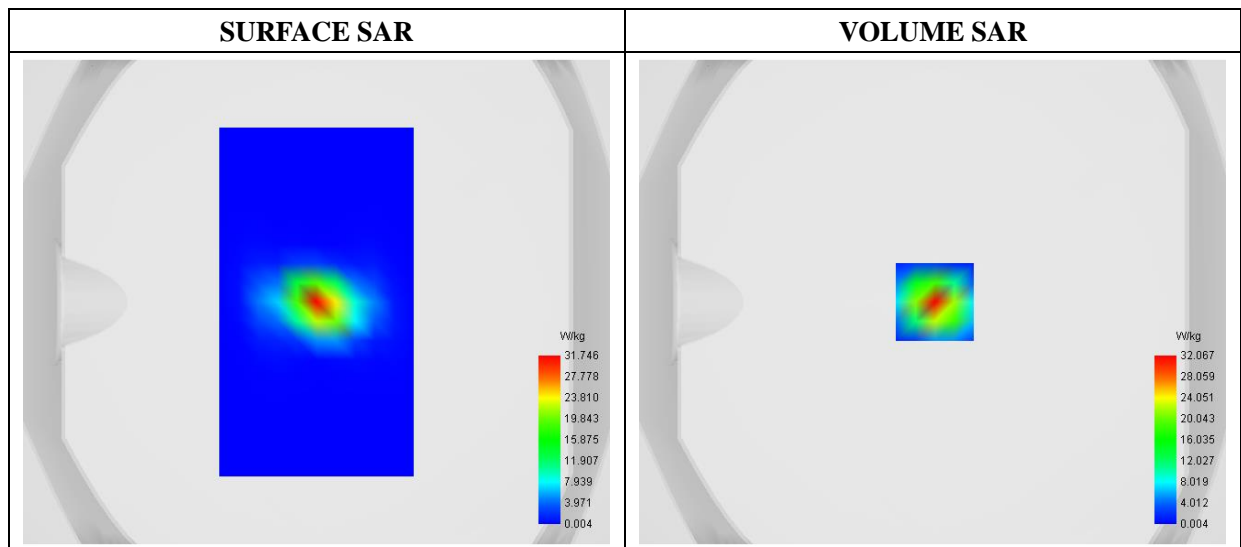

**Maximum location: X=1.00, Y=0.00**

<b>SAR 10g (W/Kg)</b>	<b>6.047588</b>
<b>SAR 1g (W/Kg)</b>	<b>17.481175</b>

Z (mm)	0.00	2.00	7.00	12.00	17.00	22.00	27.00
<b>SAR (W/Kg)</b>	<b>49.8193</b>	<b>32.0669</b>	<b>7.0244</b>	<b>1.5969</b>	<b>0.3410</b>	<b>0.0635</b>	<b>0.0070</b>

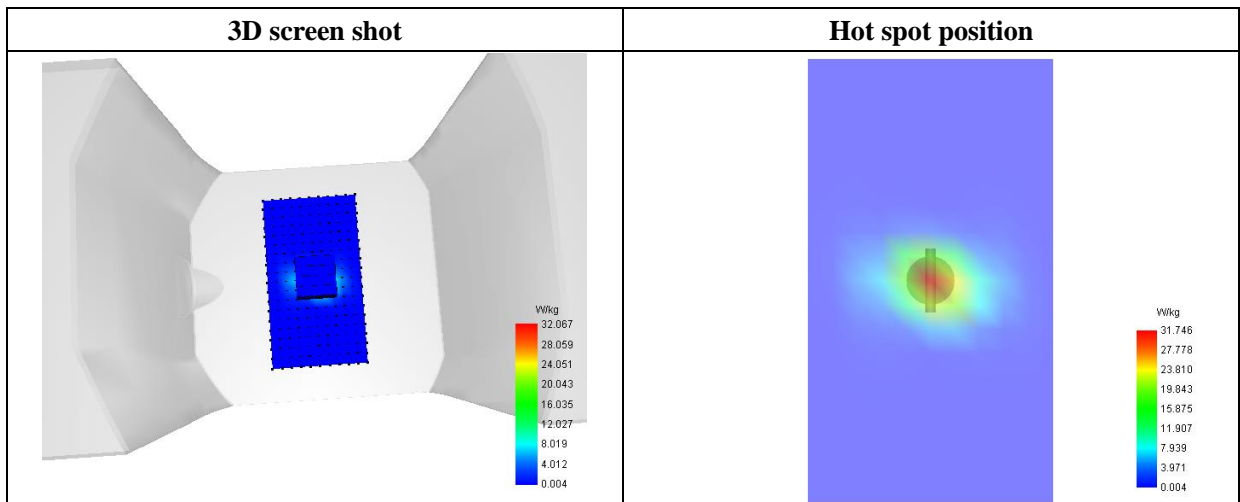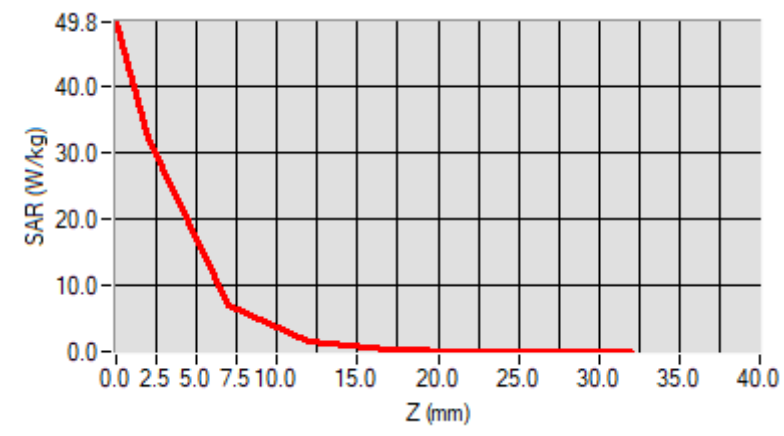

# MEASUREMENT 9

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.25; Calibrated: 2021-07-16

## A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Zoom Scan</b>	dx=4mm dy=4mm dz=2mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW5600
<b>Signal</b>	CW (Crest factor: 1.0)

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	5600.000000
<b>Relative Permittivity (real part)</b>	36.361205
<b>Conductivity (S/m)</b>	5.140357
<b>Power Variation (%)</b>	-0.640000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

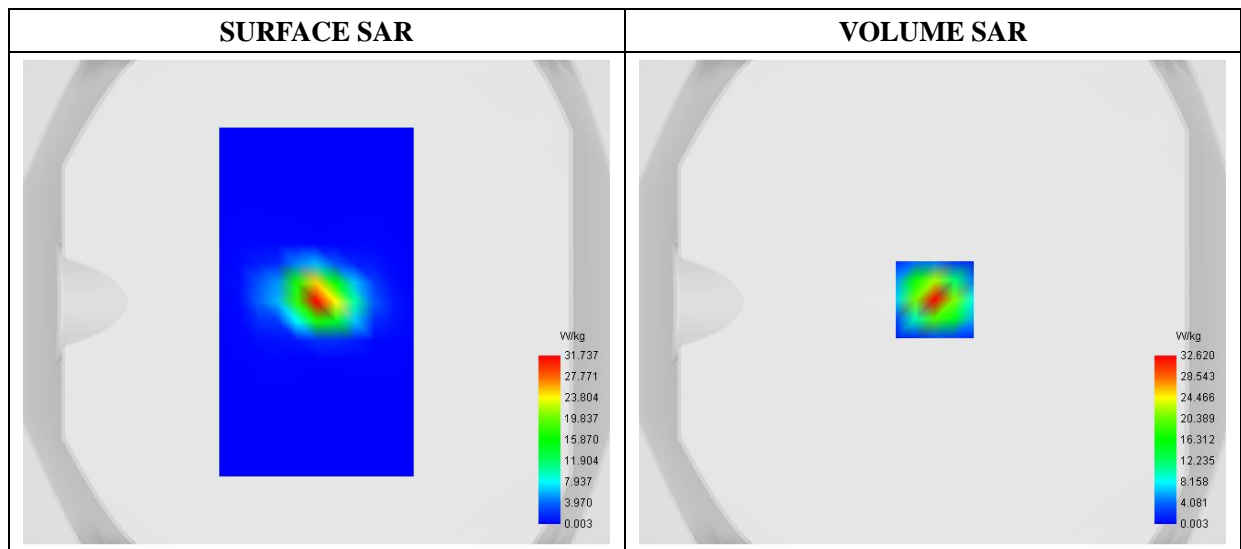

**Maximum location: X=1.00, Y=1.00**

SAR 10g (W/Kg)	5.922791
SAR 1g (W/Kg)	17.604052

Z (mm)	0.00	2.00	7.00	12.00	17.00	22.00	27.00
SAR (W/Kg)	51.2061	32.6198	6.6166	1.3486	0.2638	0.0509	0.0050

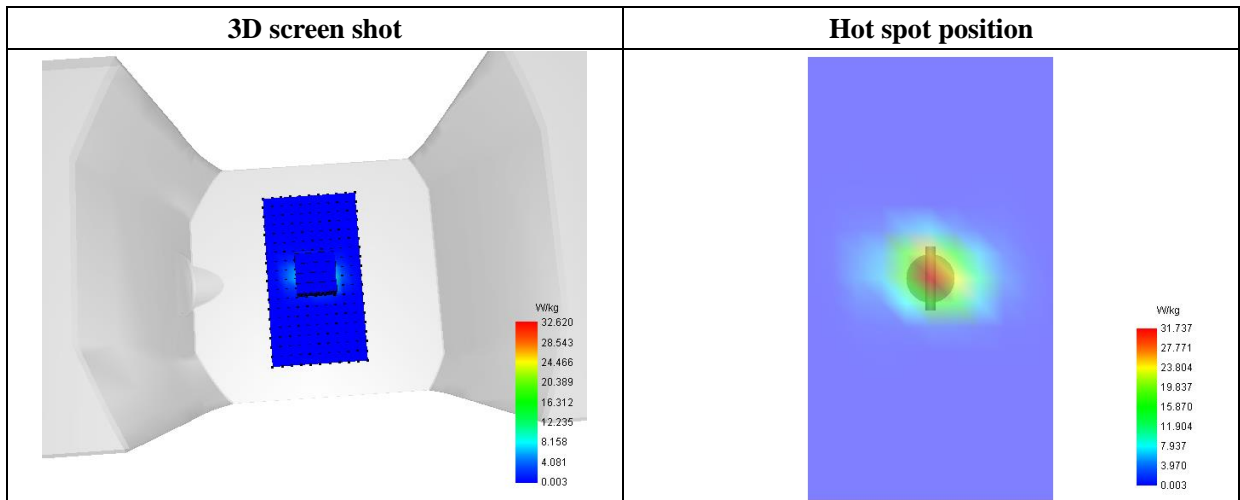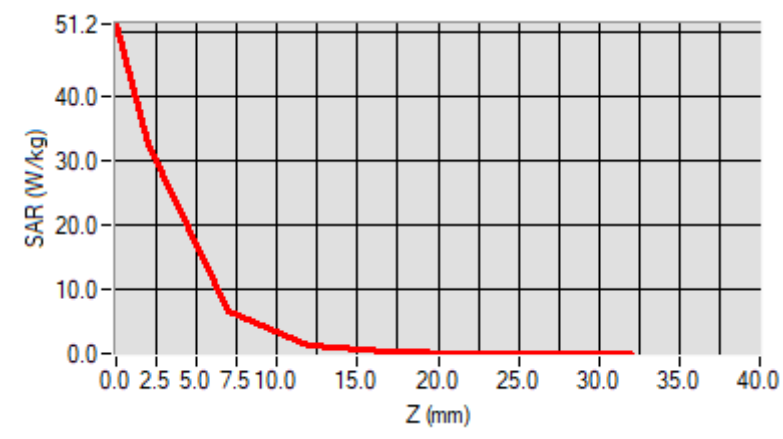

# MEASUREMENT 10

Type: Validation measurement (Fast, 75.00 %)

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.15; Calibrated: 2021-07-16

## A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Zoom Scan</b>	dx=4mm dy=4mm dz=2mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW5800
<b>Signal</b>	CW (Crest factor: 1.0)

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	5800.000000
<b>Relative Permittivity (real part)</b>	36.293814
<b>Conductivity (S/m)</b>	5.132705
<b>Power Variation (%)</b>	-1.640000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

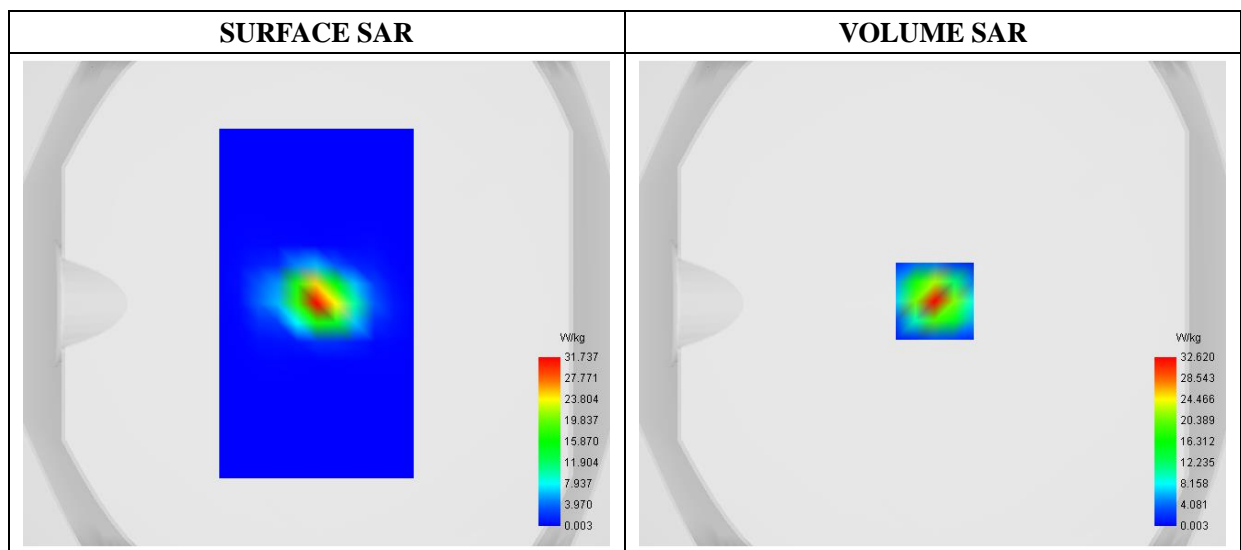

**Maximum location: X=1.00, Y=1.00**

<b>SAR 10g (W/Kg)</b>	<b>5.983506</b>
<b>SAR 1g (W/Kg)</b>	<b>17.960742</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>2.00</b>	<b>7.00</b>	<b>12.00</b>	<b>17.00</b>	<b>22.00</b>	<b>27.00</b>
<b>SAR (W/Kg)</b>	<b>51.2061</b>	<b>32.6198</b>	<b>6.6166</b>	<b>1.3486</b>	<b>0.2638</b>	<b>0.0509</b>	<b>0.0050</b>

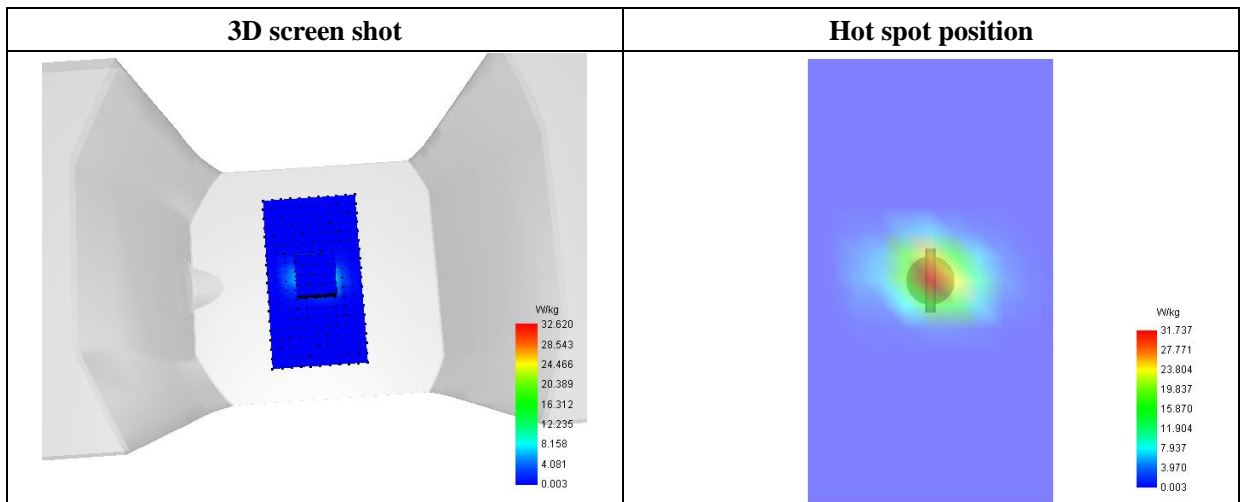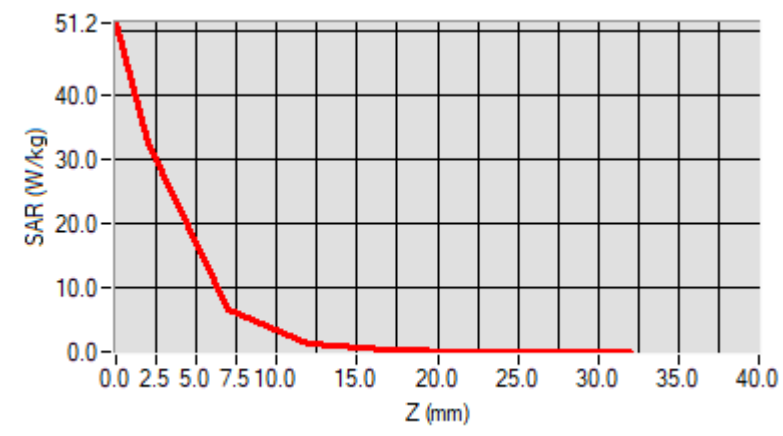

## Annex B. Plots of SAR Measurement

# MEASUREMENT 1

Type: Phone measurement (Complete)

Date of measurement: 2022-06-15


Measurement duration: 11 minutes 48 seconds

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Right head
<b>Device Position</b>	Cheek
<b>Band</b>	GSM850
<b>Channels</b>	Low
<b>Signal</b>	TDMA (Crest factor: 8.0)

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	836.600000
<b>Relative Permittivity (real part)</b>	42.750245
<b>Conductivity (S/m)</b>	0.911245
<b>Power Variation (%)</b>	1.074536
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

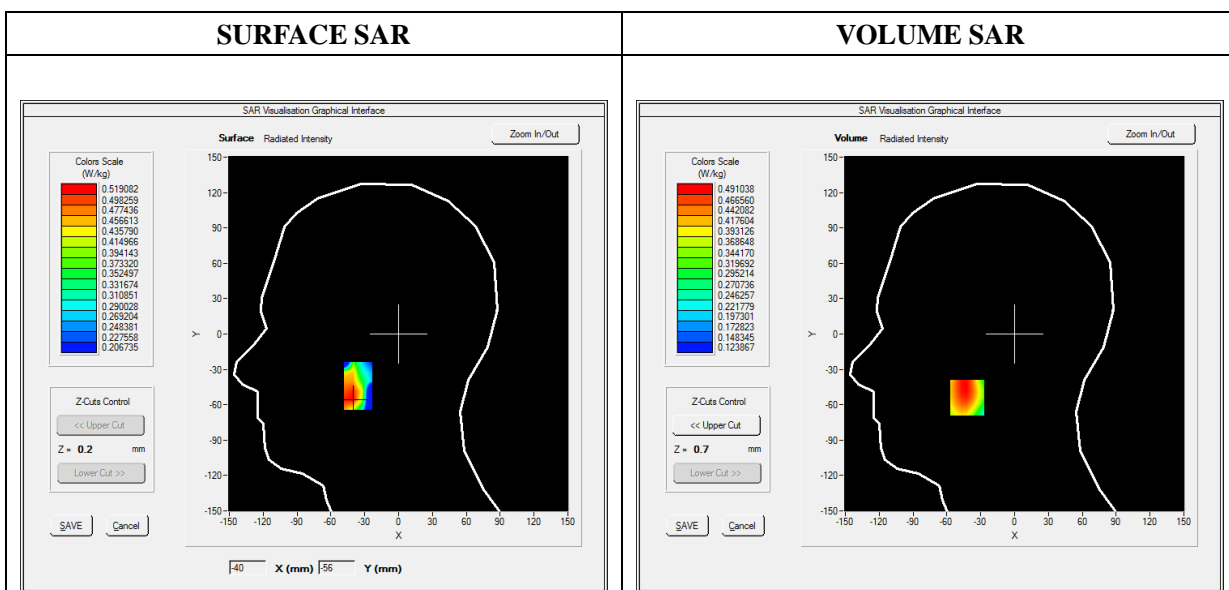


**Maximum location: X=-42.00, Y=-54.00**

**SAR Peak: 0.63 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.364363</b>
<b>SAR 1g (W/Kg)</b>	<b>0.477538</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.9994</b>	<b>0.4910</b>	<b>0.3367</b>	<b>0.3057</b>	<b>0.2284</b>

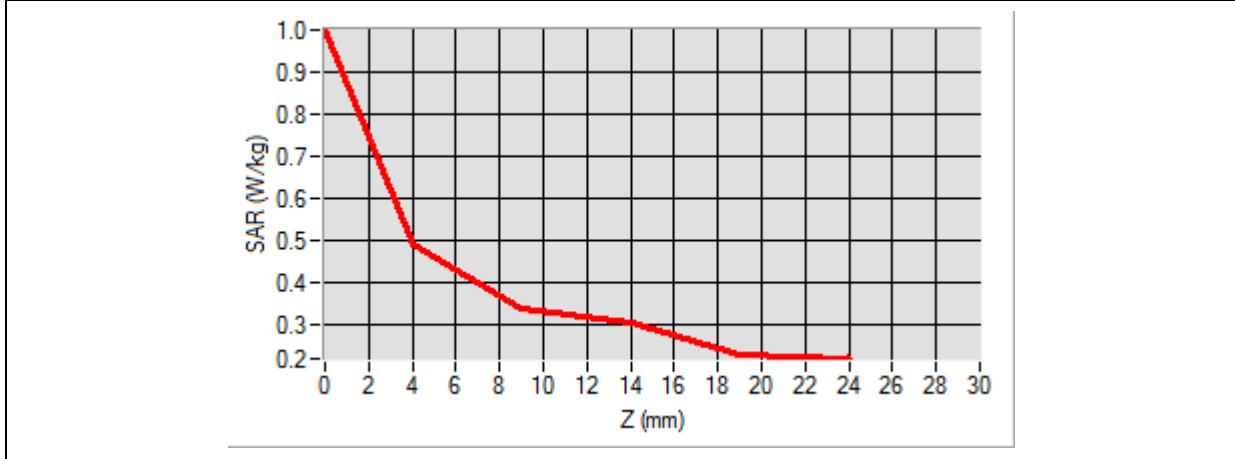

<b>3D screen shot</b>	<b>Hot spot position</b>



# MEASUREMENT 2


Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-15  
 Measurement duration: 11 minutes 48 seconds

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Cheek
<b>Band</b>	GPRS1900_4TX
<b>Channels</b>	Low
<b>Signal</b>	Duty Cycle: 1:2

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1850.200000
<b>Relative Permittivity (real part)</b>	41.430124
<b>Conductivity (S/m)</b>	1.410369
<b>Power Variation (%)</b>	-0.150000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

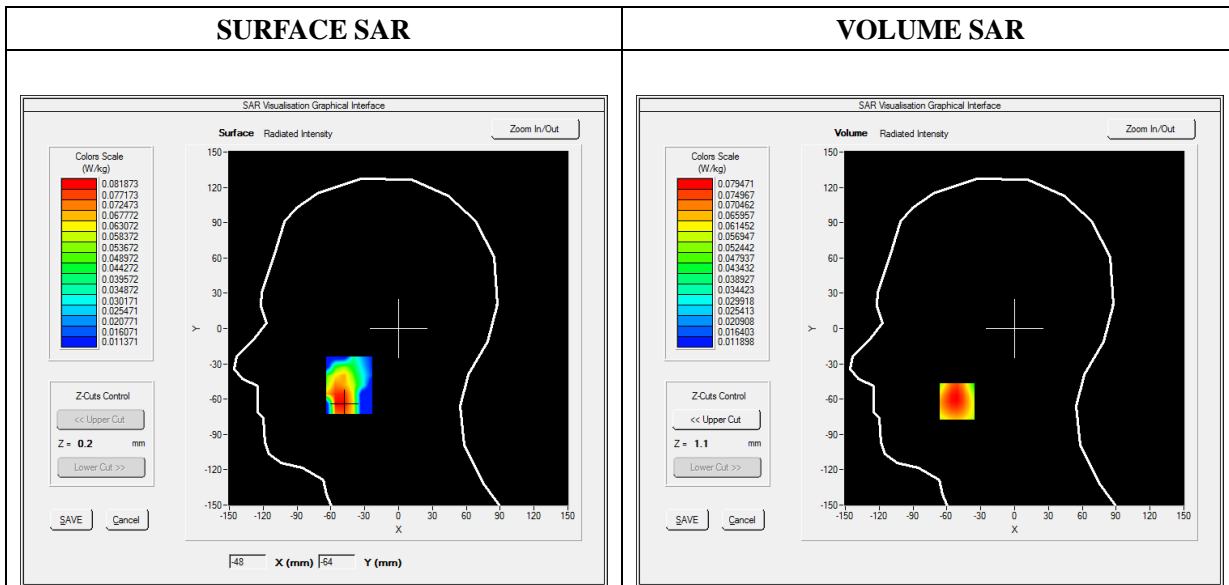




**Maximum location: X=-51.00, Y=-62.00**

**SAR Peak: 0.10 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.052494</b>
<b>SAR 1g (W/Kg)</b>	<b>0.076207</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.1067</b>	<b>0.0795</b>	<b>0.0577</b>	<b>0.0428</b>	<b>0.0306</b>

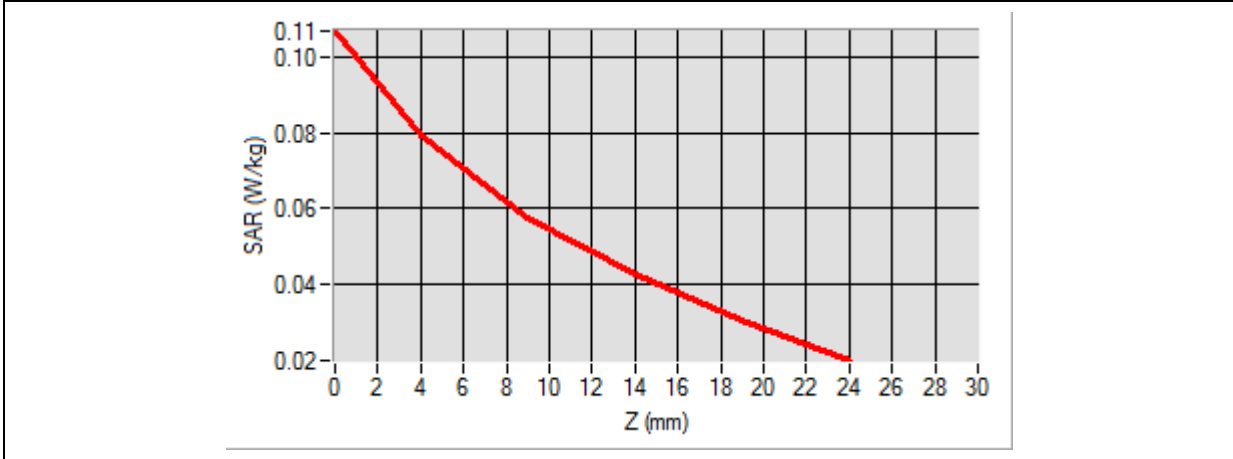

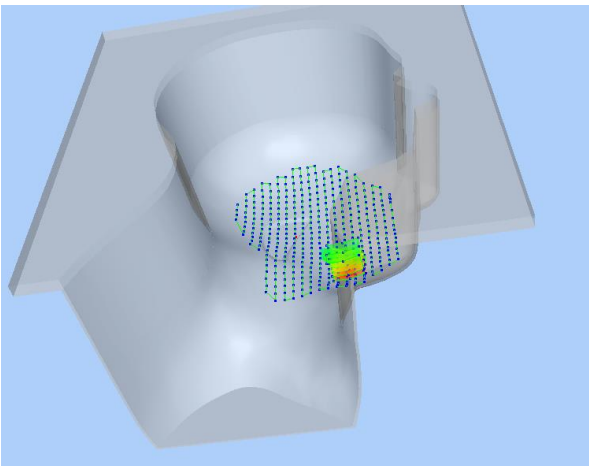3D screen shot	Hot spot position
	

# MEASUREMENT 3


Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-15  
 Measurement duration: 12 minutes 3 seconds

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Cheek
<b>Band</b>	WCDMA1900_RMC
<b>Channels</b>	High
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1907.600000
<b>Relative Permittivity (real part)</b>	42.060124
<b>Conductivity (S/m)</b>	1.413607
<b>Power Variation (%)</b>	0.820000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

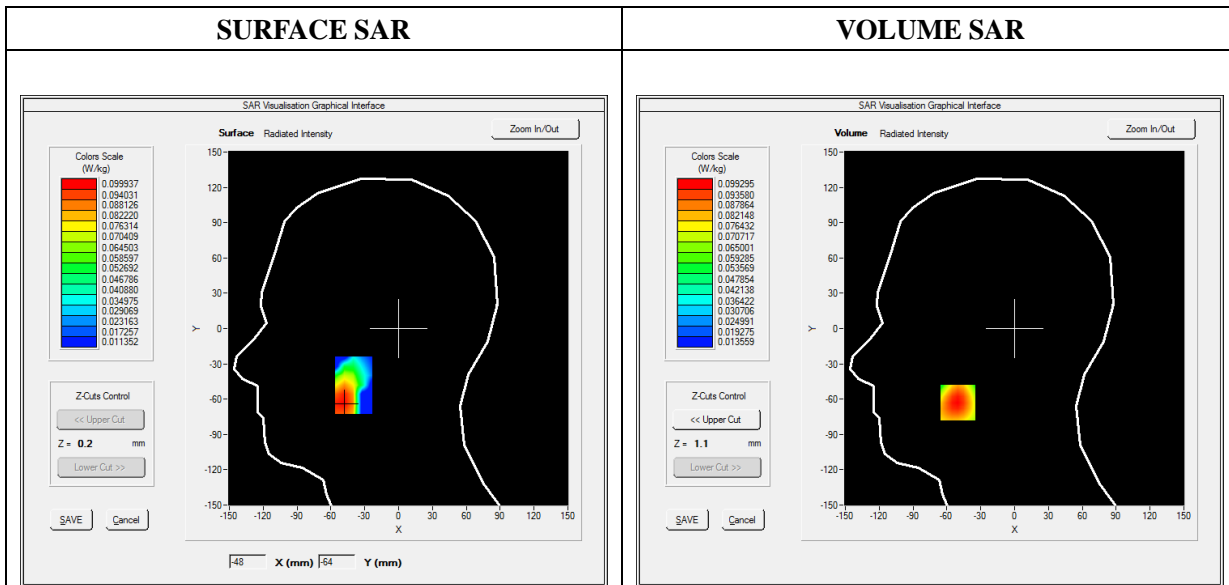


**Maximum location: X=-50.00, Y=-63.00**

**SAR Peak: 0.13 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.064596</b>
<b>SAR 1g (W/Kg)</b>	<b>0.094249</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.1287</b>	<b>0.0993</b>	<b>0.0716</b>	<b>0.0521</b>	<b>0.0382</b>

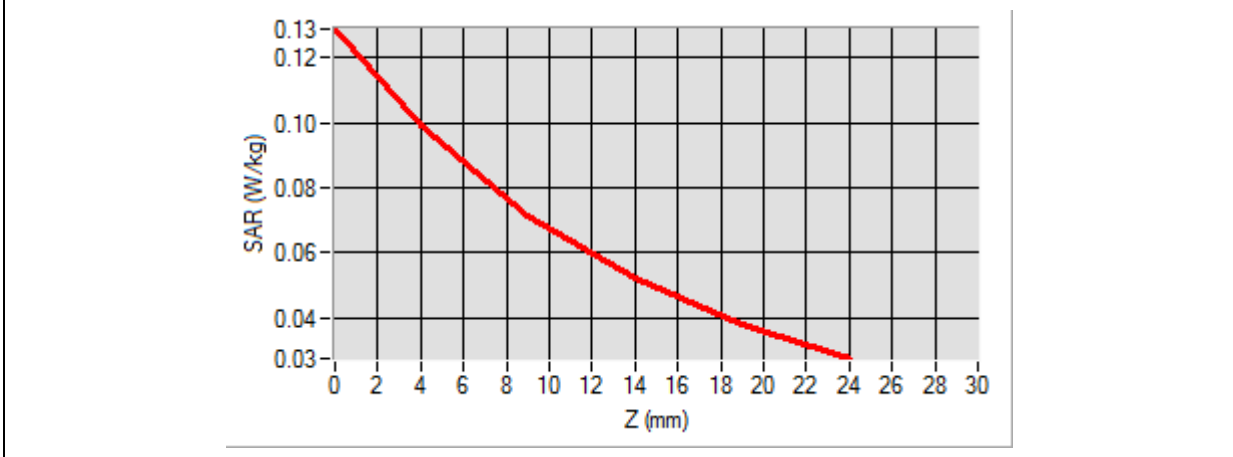

3D screen shot	Hot spot position
<p>A 3D model of a human head and neck, rendered in a light blue color. A grid of small blue dots is overlaid on the head's surface. A small, localized area of the grid is highlighted with a color gradient from red to green, indicating the hot spot position.</p>	<p>An isolated 3D visualization of the hot spot. It shows a small, irregularly shaped volume with a color gradient from red (high SAR) to green (lower SAR), representing the location and intensity of the maximum SAR exposure.</p>

# MEASUREMENT 4


Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-15  
 Measurement duration: 12 minutes 3 seconds

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Cheek
<b>Band</b>	WCDMA850_RMC
<b>Channels</b>	Low
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	826.400000
<b>Relative Permittivity (real part)</b>	42.751245
<b>Conductivity (S/m)</b>	0.911245
<b>Power Variation (%)</b>	-1.360000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

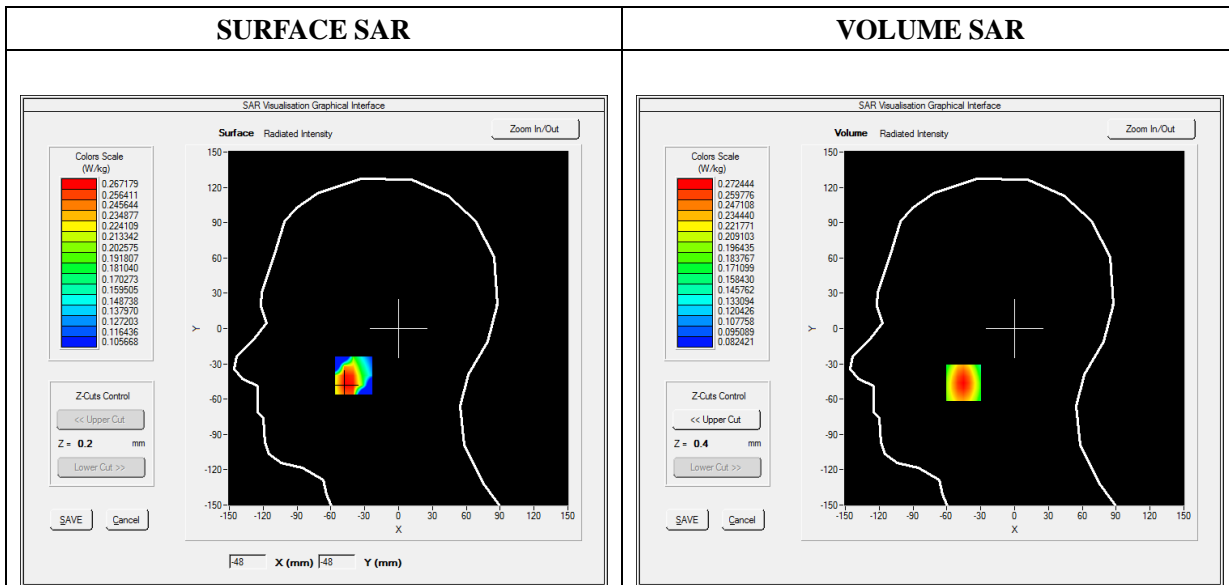


**Maximum location: X=-45.00, Y=-46.00**

**SAR Peak: 0.33 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.193517</b>
<b>SAR 1g (W/Kg)</b>	<b>0.259363</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.3324</b>	<b>0.2724</b>	<b>0.2141</b>	<b>0.1713</b>	<b>0.1398</b>

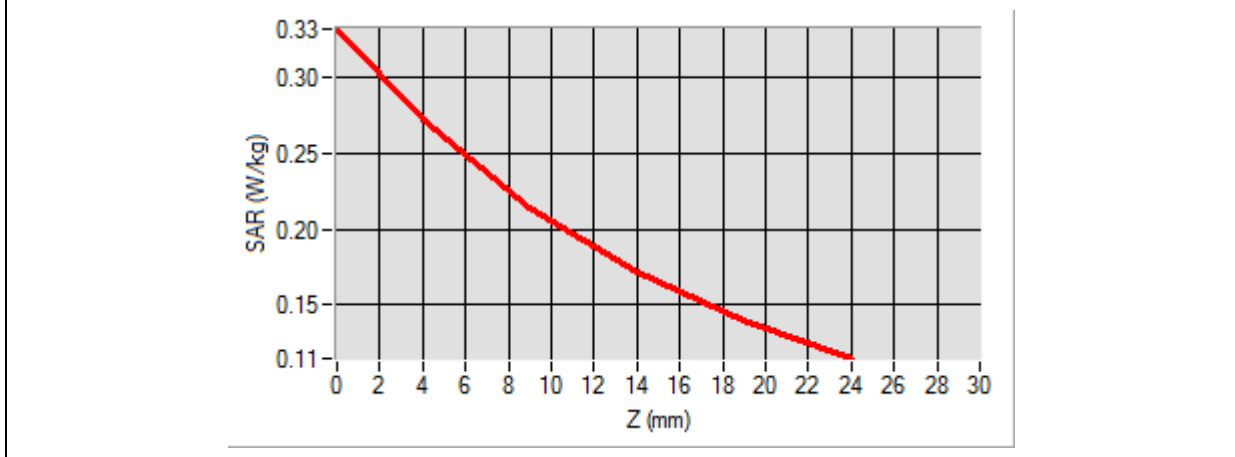

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey, bowl-shaped device. A grid of small blue dots is overlaid on the inner surface. A localized area of high SAR is highlighted with a color gradient from yellow to red, indicating the hot spot.</p>	<p>An isolated 3D visualization of the hot spot, showing a small, irregularly shaped volume with a color gradient from yellow to red, representing the maximum SAR exposure area.</p>

# MEASUREMENT 5


Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-15  
 Measurement duration: 12 minutes 3 seconds

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Cheek
<b>Band</b>	LTE Band 4
<b>Channels</b>	QPSK, 20MHz, 1RB,Middle
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1732.500000
<b>Relative Permittivity (real part)</b>	41.432275
<b>Conductivity (S/m)</b>	1.410987
<b>Power Variation (%)</b>	0.080000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

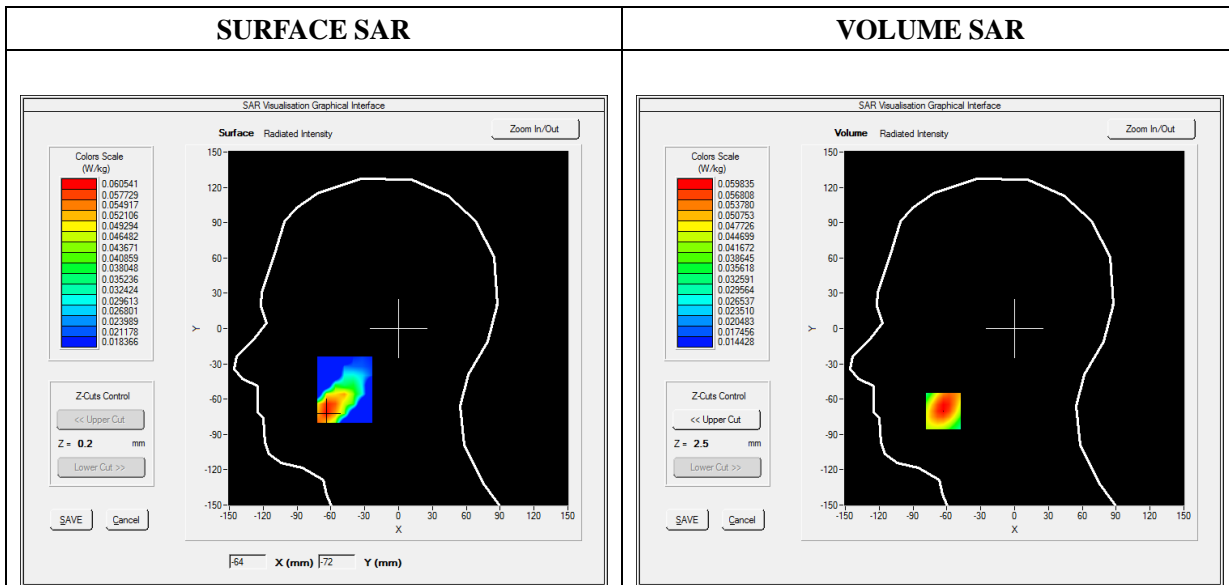


**Maximum location: X=-63.00, Y=-70.00**

**SAR Peak: 0.08 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.041511</b>
<b>SAR 1g (W/Kg)</b>	<b>0.057512</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.0740</b>	<b>0.0598</b>	<b>0.0457</b>	<b>0.0350</b>	<b>0.0269</b>

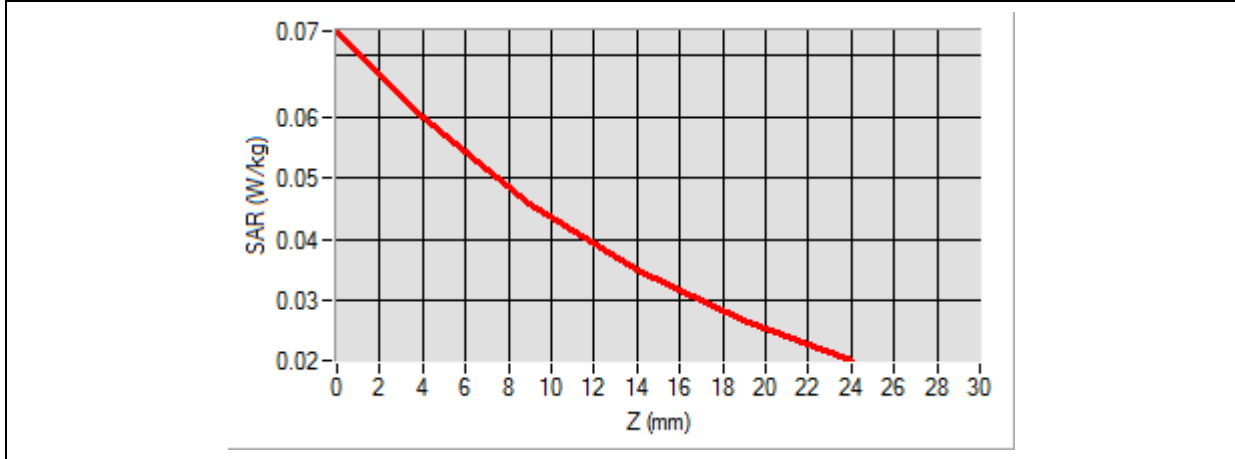

3D screen shot	Hot spot position
<p>A 3D perspective view of a human head model. A grid of blue dots is overlaid on the face, representing the measurement points. A localized area of high SAR is highlighted with a color gradient from yellow to red, indicating the hot spot.</p>	<p>A 3D visualization of the hot spot, showing a color gradient from red (highest SAR) to green (lower SAR) on a small, irregularly shaped volume.</p>



# MEASUREMENT 6


Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-15  
 Measurement duration: 12 minutes 3 seconds

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Right head
<b>Device Position</b>	Cheek
<b>Band</b>	LTE Band 7
<b>Channels</b>	QPSK, 20MHz, 1RB, Middle
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	2535.000000
<b>Relative Permittivity (real part)</b>	38.930666
<b>Conductivity (S/m)</b>	2.040182
<b>Power Variation (%)</b>	-0.700000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

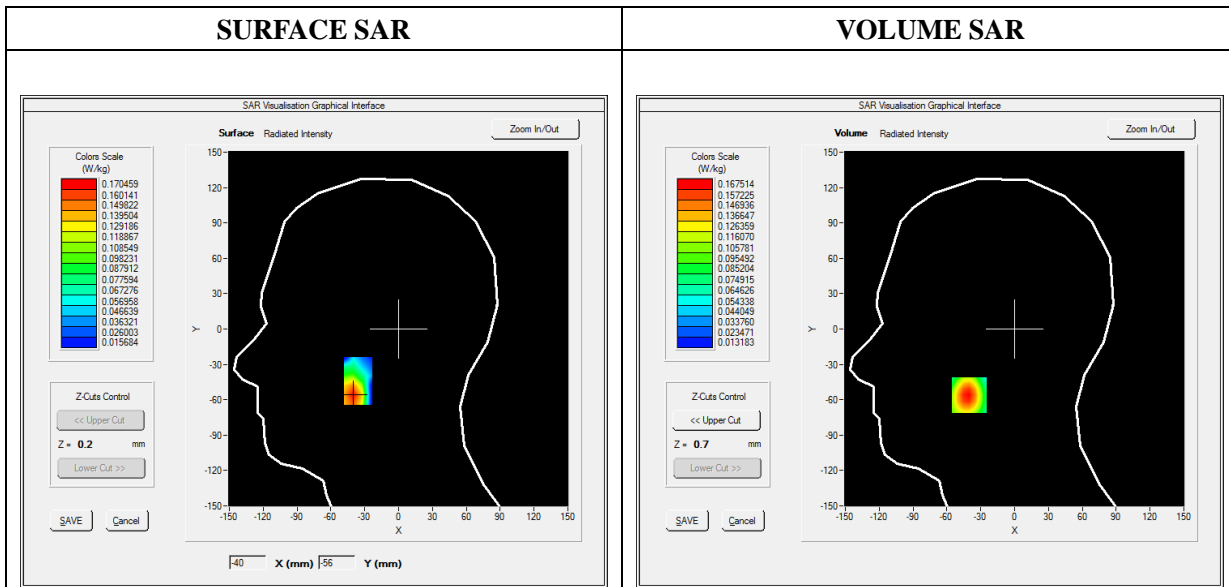


**Maximum location: X=-40.00, Y=-56.00**

**SAR Peak: 0.24 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.095321</b>
-----------------------	-----------------

<b>SAR 1g (W/Kg)</b>	<b>0.155669</b>
----------------------	-----------------

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.2342</b>	<b>0.1675</b>	<b>0.1100</b>	<b>0.0739</b>	<b>0.0516</b>

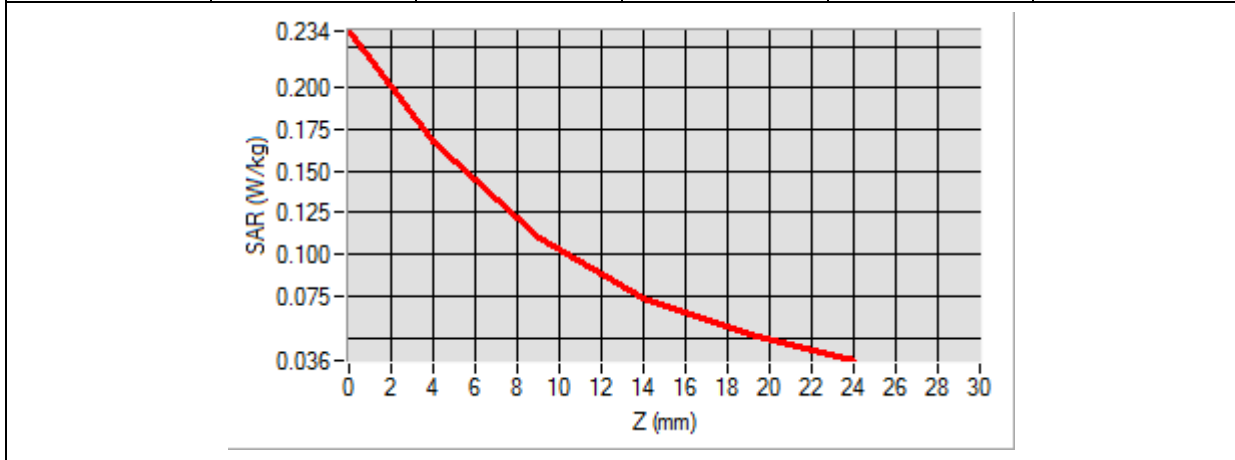

<b>3D screen shot</b>	<b>Hot spot position</b>

# MEASUREMENT 7


Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-15  
 Measurement duration: 12 minutes 3 seconds

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Cheek
<b>Band</b>	WiFi_802.11b
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	2437.000000
<b>Relative Permittivity (real part)</b>	38.450600
<b>Conductivity (S/m)</b>	1.870638
<b>Power Variation (%)</b>	-0.960000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

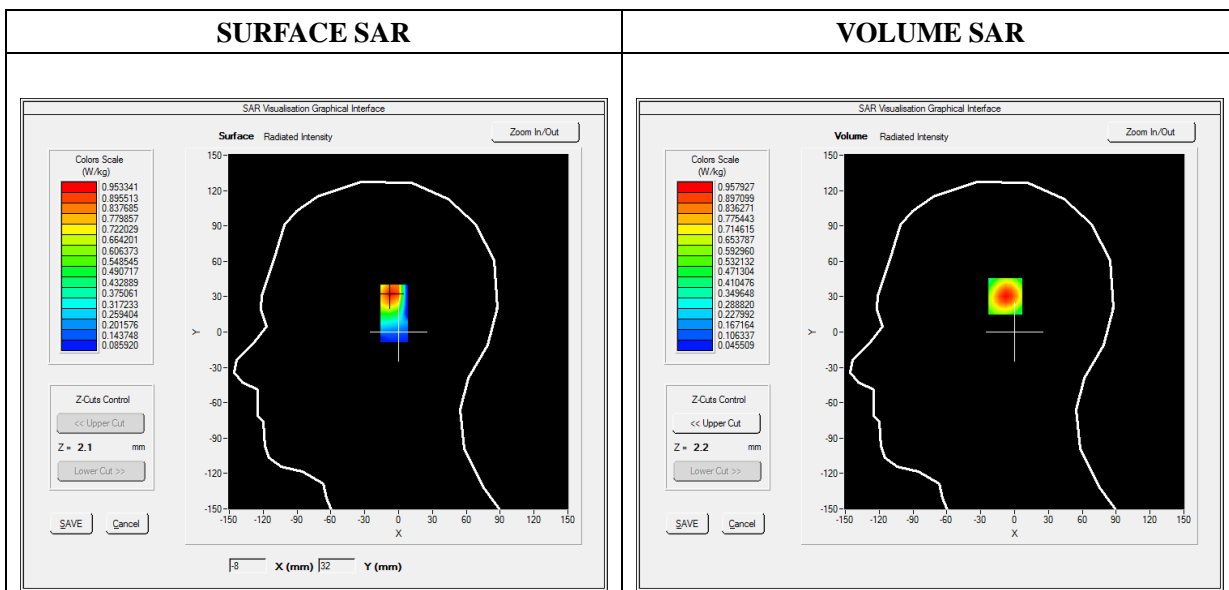


**Maximum location: X=-7.00, Y=32.00**

**SAR Peak: 1.51 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.486481</b>
-----------------------	-----------------

<b>SAR 1g (W/Kg)</b>	<b>0.687911</b>
----------------------	-----------------

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>1.5114</b>	<b>0.9579</b>	<b>0.5255</b>	<b>0.2879</b>	<b>0.1634</b>

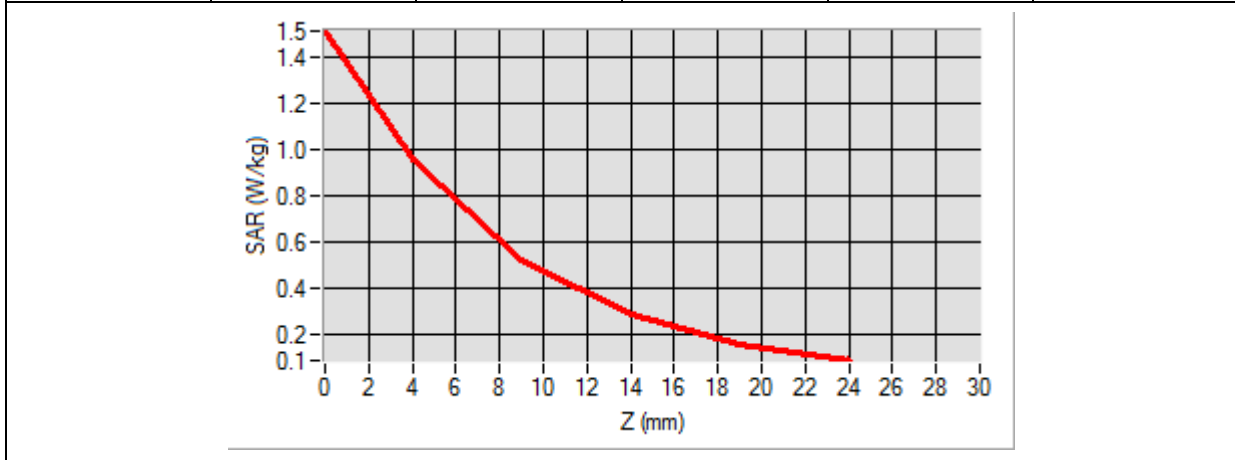

<b>3D screen shot</b>	<b>Hot spot position</b>

# MEASUREMENT 8


Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-15  
 Measurement duration: 12 minutes 3 seconds

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Cheek
<b>Band</b>	Bluetooth
<b>Channels</b>	High
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	2480.000000
<b>Relative Permittivity (real part)</b>	38.450600
<b>Conductivity (S/m)</b>	1.873880
<b>Power Variation (%)</b>	-0.960000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

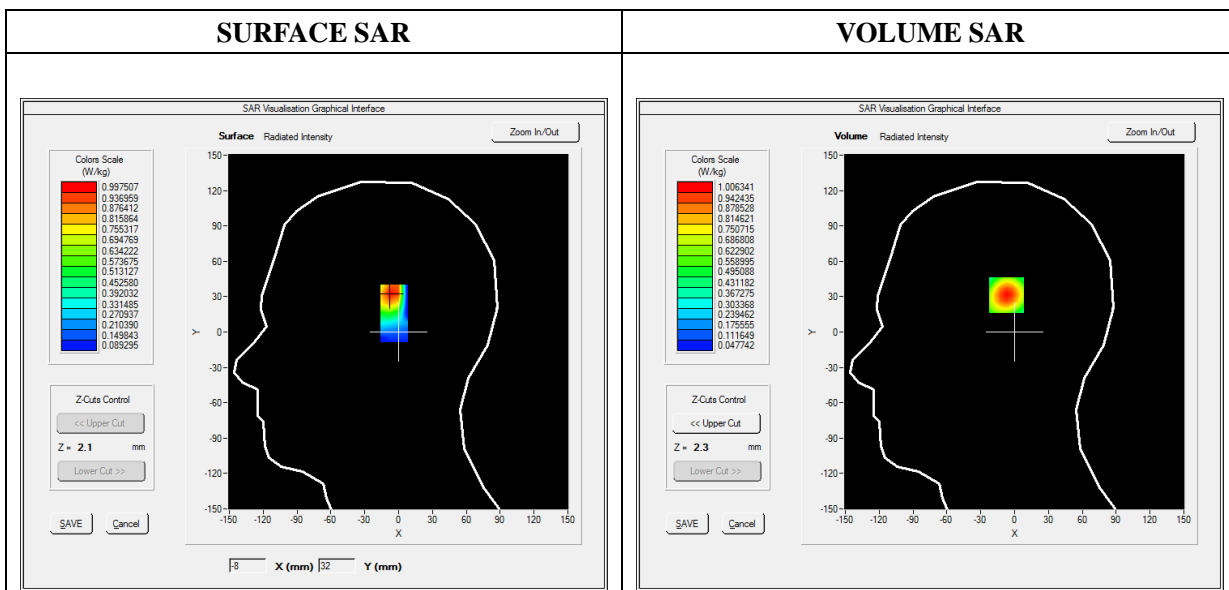


**Maximum location: X=-6.00, Y=33.00**

**SAR Peak: 0.59 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.512287</b>
-----------------------	-----------------

<b>SAR 1g (W/Kg)</b>	<b>0.232001</b>
----------------------	-----------------

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.5859</b>	<b>0.3063</b>	<b>0.2532</b>	<b>0.0540</b>	<b>0.0233</b>

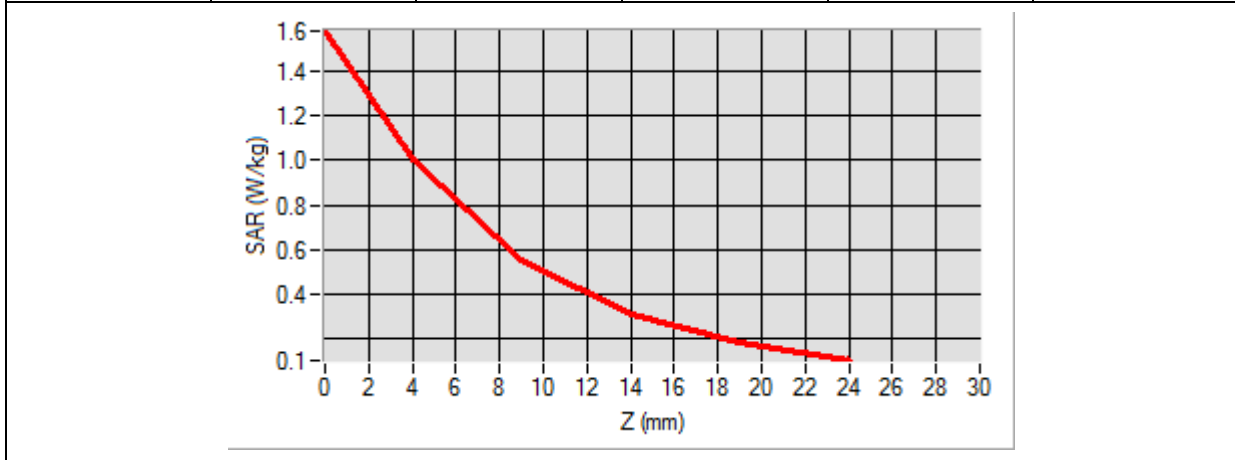

<b>3D screen shot</b>	<b>Hot spot position</b>

# MEASUREMENT 9

Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-16  
 Measurement duration: 12 minutes 3 seconds


**A. Experimental conditions**

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Right Head
<b>Device Position</b>	Cheek
<b>Band</b>	WiFi(5.2GHz)_802.11ac (40MHz)
<b>Channels</b>	Low
<b>Signal</b>	Duty Cycle: 1:1

**B. SAR Measurement Results**

<b>Frequency (MHz)</b>	5190.000000
<b>Relative Permittivity (real part)</b>	37.633869
<b>Conductivity (S/m)</b>	4.940761
<b>Power Variation (%)</b>	-1.150000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

**C. SAR Surface and Volume**

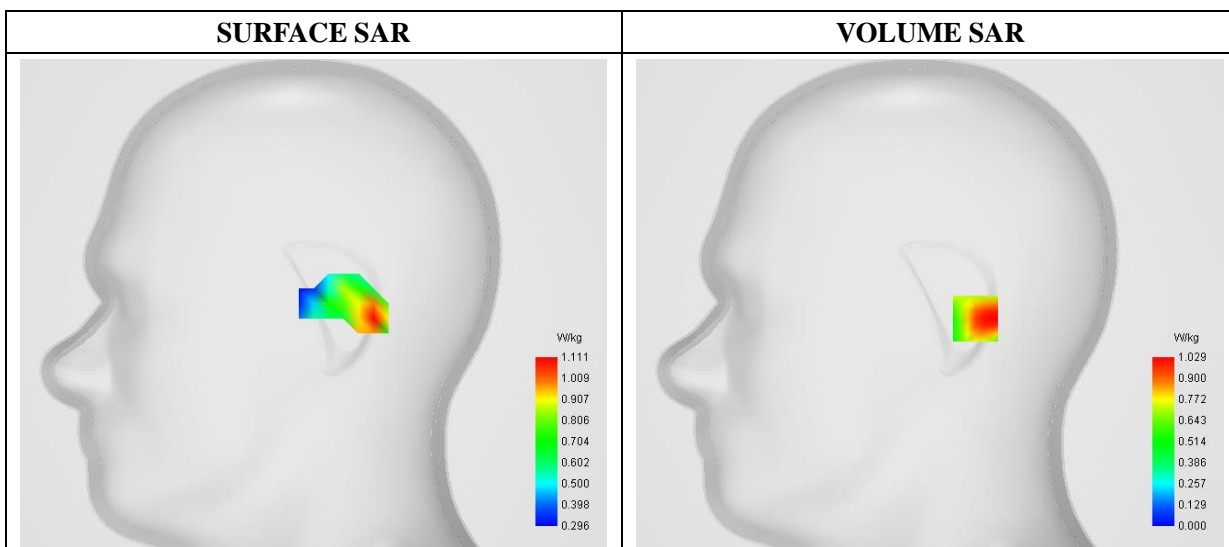


**Maximum location: X=24.00, Y=-8.00**

**D. SAR 1g & 10g**


<b>SAR 10g (W/Kg)</b>	<b>0.546383</b>
<b>SAR 1g (W/Kg)</b>	<b>0.642770</b>

**E. Z Axis Scan**

<b>Z (mm)</b>	<b>0.00</b>	<b>2.00</b>	<b>4.00</b>	<b>6.00</b>	<b>8.00</b>	<b>10.00</b>	<b>12.00</b>	<b>14.00</b>	<b>16.00</b>
<b>SAR (W/Kg)</b>	<b>1.7304</b>	<b>1.0287</b>	<b>0.4815</b>	<b>0.5956</b>	<b>0.2823</b>	<b>0.3704</b>	<b>0.2080</b>	<b>0.2516</b>	<b>0.1876</b>

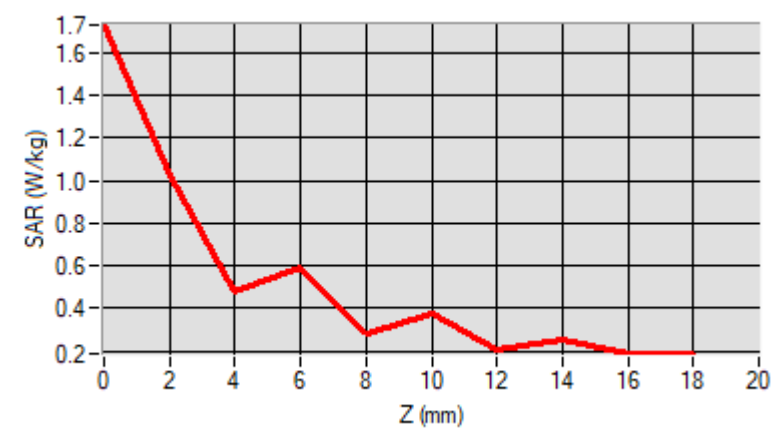

**F. 3D Image**

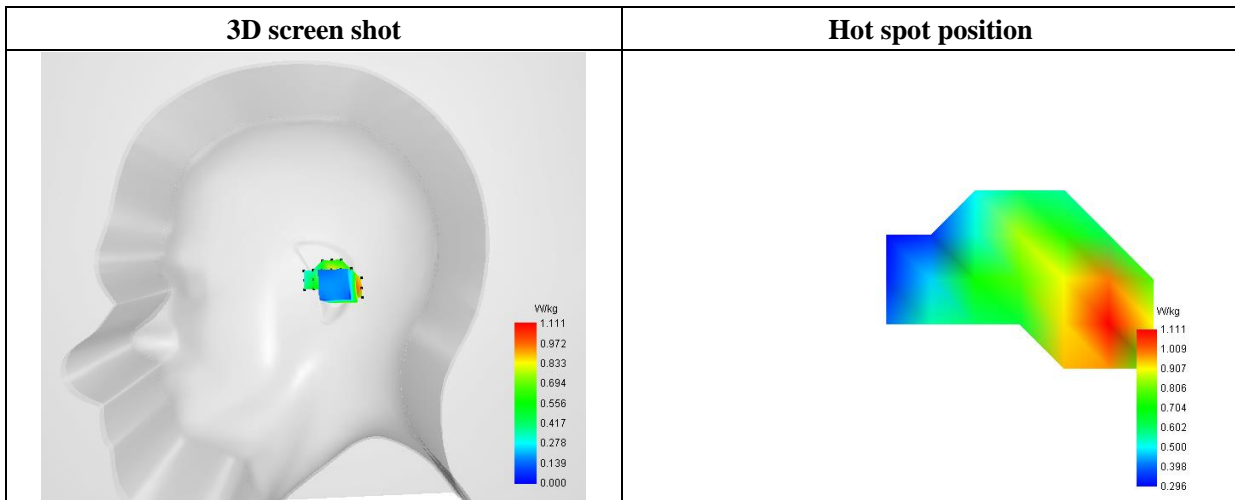



# MEASUREMENT 10

Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-16  
 Measurement duration: 12 minutes 3 seconds


**A. Experimental conditions**

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Right Head
<b>Device Position</b>	Cheek
<b>Band</b>	WiFi(5.3GHz)_802.11n (40MHz)
<b>Channels</b>	Low
<b>Signal</b>	Duty Cycle: 1:1

**B. SAR Measurement Results**

<b>Frequency (MHz)</b>	5270.000000
<b>Relative Permittivity (real part)</b>	36.960839
<b>Conductivity (S/m)</b>	5.370192
<b>Power Variation (%)</b>	0.460000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

**C. SAR Surface and Volume**

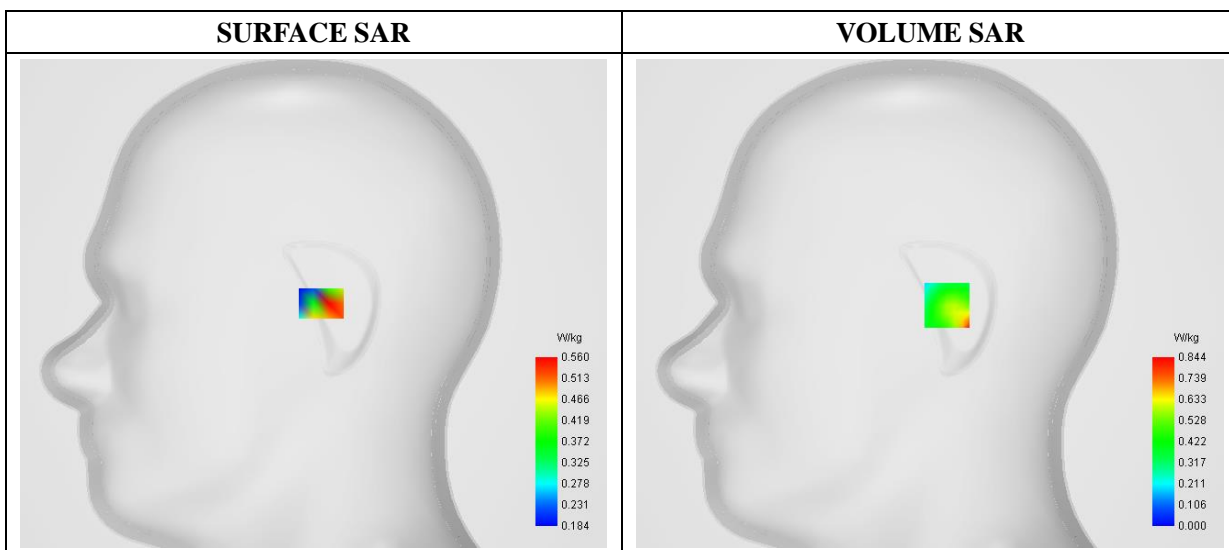


**Maximum location: X=9.00, Y=-1.00**

**D. SAR 1g & 10g**


<b>SAR 10g (W/Kg)</b>	<b>0.317405</b>
<b>SAR 1g (W/Kg)</b>	<b>0.670293</b>

**E. Z Axis Scan**

<b>Z (mm)</b>	<b>0.00</b>	<b>2.00</b>	<b>4.00</b>	<b>6.00</b>	<b>8.00</b>	<b>10.00</b>	<b>12.00</b>	<b>14.00</b>	<b>16.00</b>
<b>SAR (W/Kg)</b>	<b>1.7540</b>	<b>0.8440</b>	<b>0.1665</b>	<b>0.3779</b>	<b>0.1319</b>	<b>0.1979</b>	<b>0.1062</b>	<b>0.1365</b>	<b>0.1296</b>

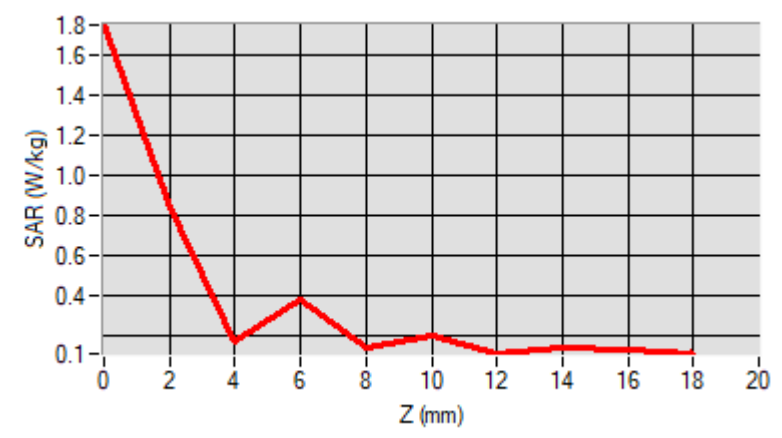

**F. 3D Image**

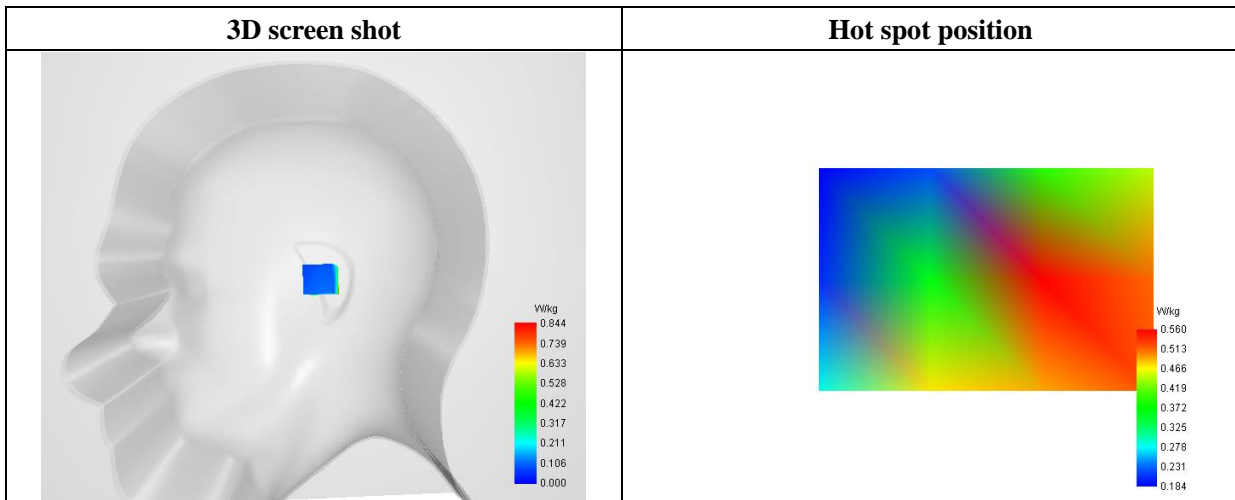

# MEASUREMENT 11

Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-16  
 Measurement duration: 12 minutes 21 seconds


**A. Experimental conditions**

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Left Head
<b>Device Position</b>	Cheek
<b>Band</b>	WiFi(5.6GHz)_802.11ac (80MHz)
<b>Channels</b>	High
<b>Signal</b>	Duty Cycle: 1:1

**B. SAR Measurement Results**

<b>Frequency (MHz)</b>	5610.000000
<b>Relative Permittivity (real part)</b>	36.360963
<b>Conductivity (S/m)</b>	5.142781
<b>Power Variation (%)</b>	-1.840000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

**C. SAR Surface and Volume**

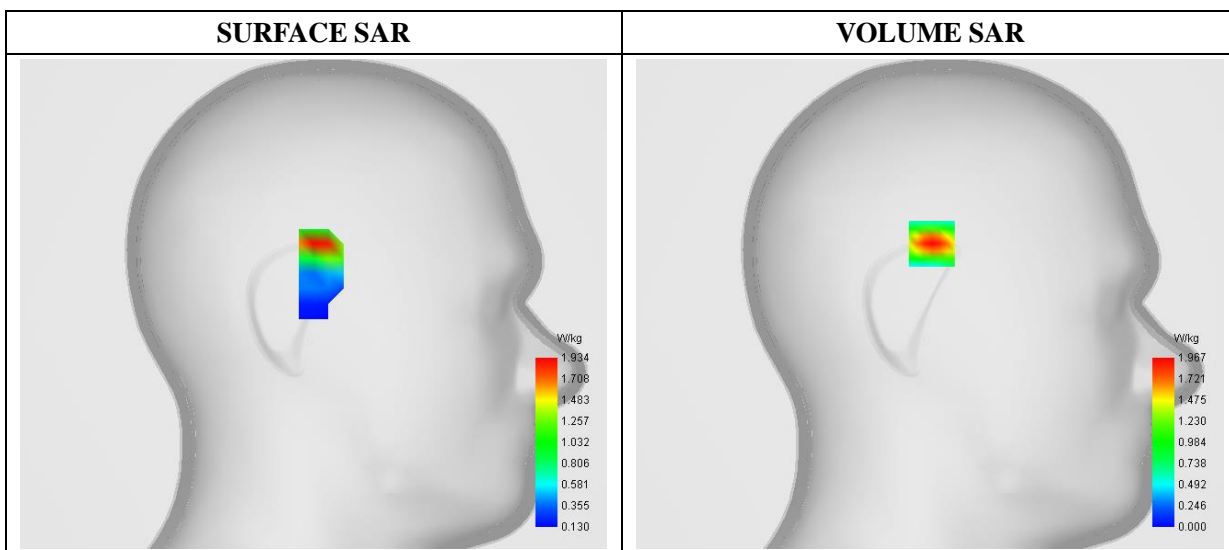


Maximum location: X=-1.00, Y=32.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.353516
SAR 1g (W/Kg)	0.698428

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	2.9385	1.9673	1.3012	0.8563	0.5766	0.4025	0.2943	0.2257	0.1770	

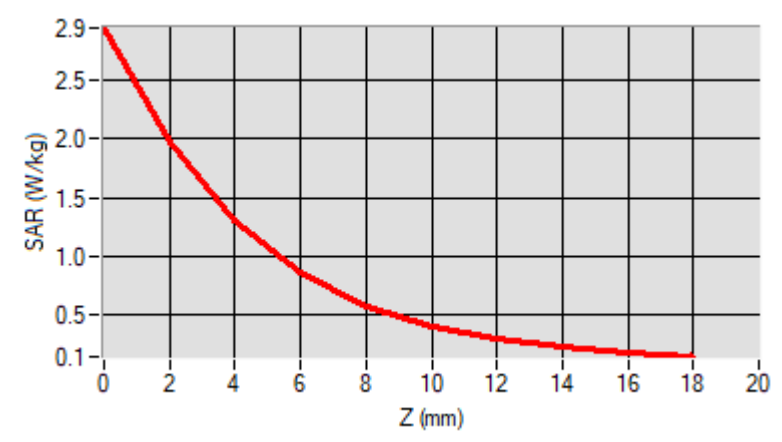

F. 3D Image

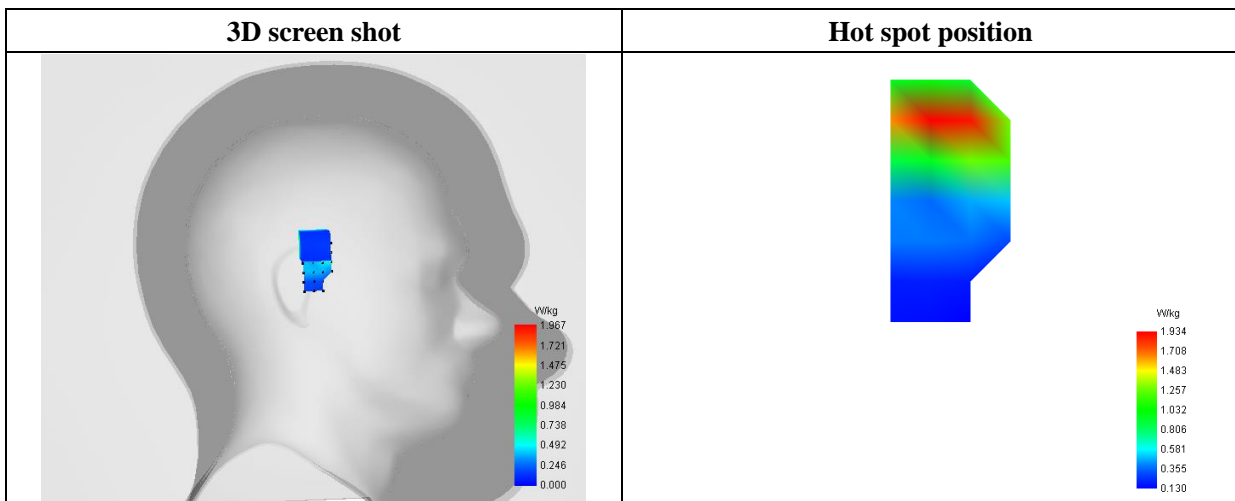

# MEASUREMENT 12

Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-16  
 Measurement duration: 12 minutes 21 seconds


### A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Left Head
<b>Device Position</b>	Cheek
<b>Band</b>	WiFi(5.8GHz)_802.11n (20MHz)
<b>Channels</b>	Low
<b>Signal</b>	Duty Cycle: 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	5745.000000
<b>Relative Permittivity (real part)</b>	36.292273
<b>Conductivity (S/m)</b>	5.130836
<b>Power Variation (%)</b>	-1.290000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

### C. SAR Surface and Volume

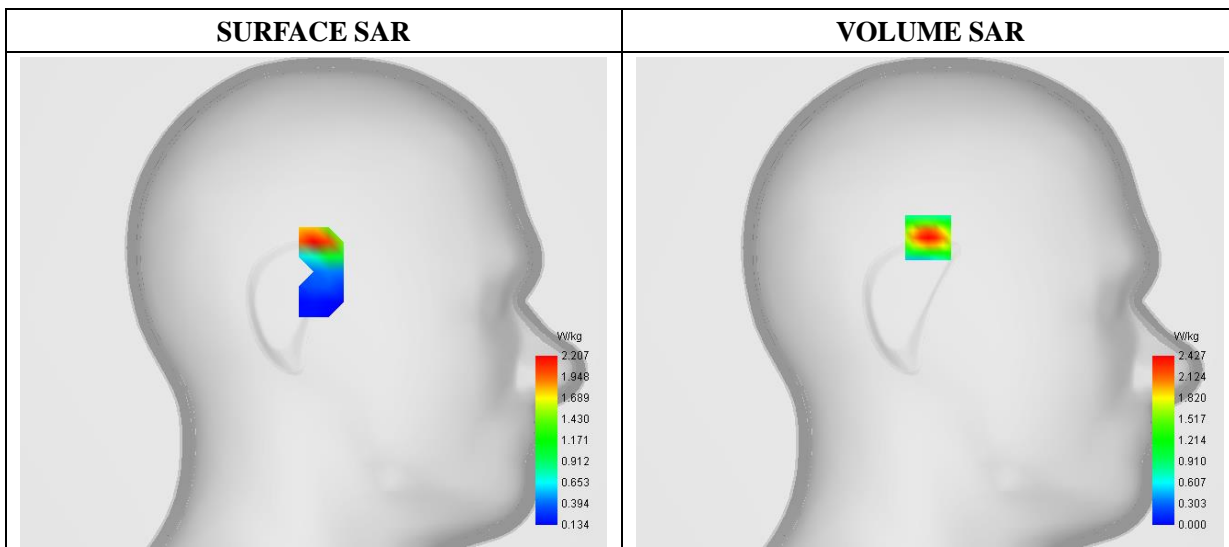


Maximum location: X=1.00, Y=34.00

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.313109
SAR 1g (W/Kg)	0.756444

**E. Z Axis Scan**

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	3.7828	2.4272	1.5286	0.9555	0.6162	0.4197	0.3080	0.2453	0.1930	

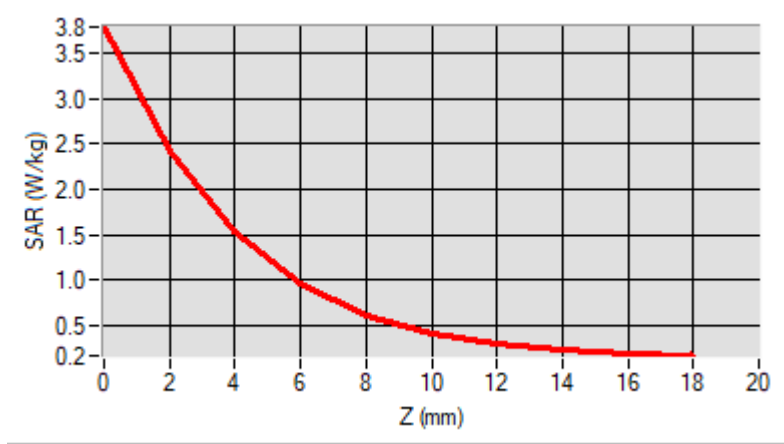

**F. 3D Image**

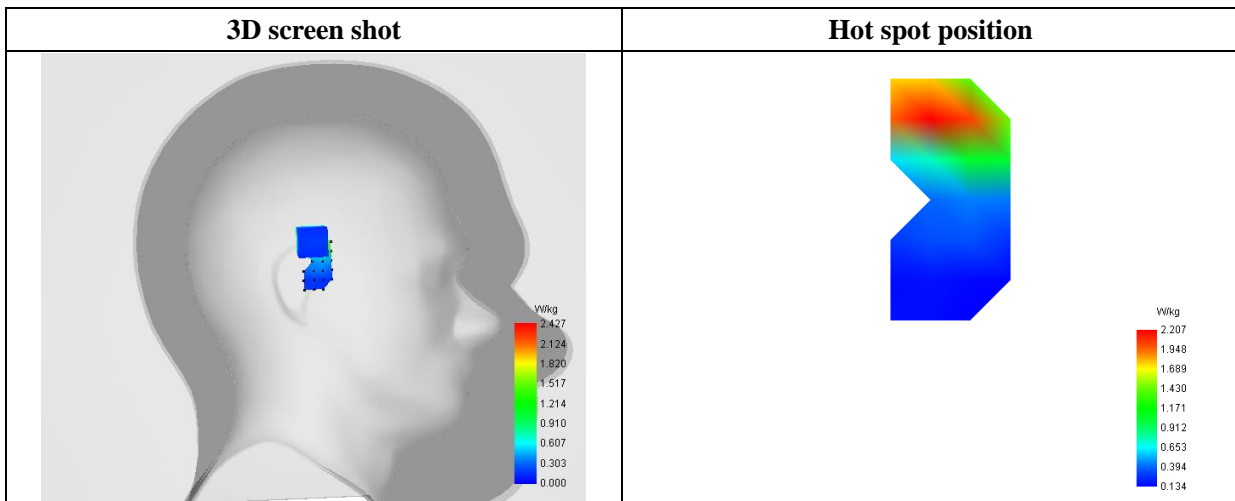

# MEASUREMENT 13


Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-15  
 Measurement duration: 12 minutes 3 seconds

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back
<b>Band</b>	GSM850
<b>Channels</b>	Middle
<b>Signal</b>	TDMA (Crest factor: 8.0)

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	836.600000
<b>Relative Permittivity (real part)</b>	42.750245
<b>Conductivity (S/m)</b>	0.911245
<b>Power Variation (%)</b>	0.721472
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

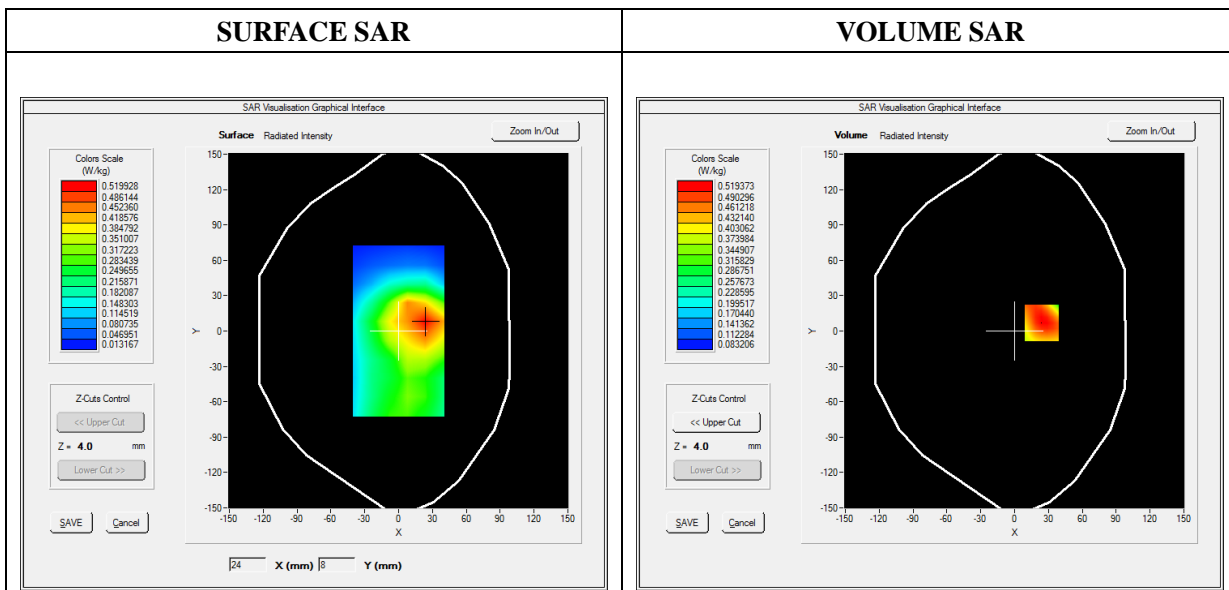




**Maximum location: X=24.00, Y=7.00**  
**SAR Peak: 0.76 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.356183</b>
-----------------------	-----------------

<b>SAR 1g (W/Kg)</b>	<b>0.507341</b>
----------------------	-----------------

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.6547</b>	<b>0.5194</b>	<b>0.3845</b>	<b>0.2816</b>	<b>0.2031</b>

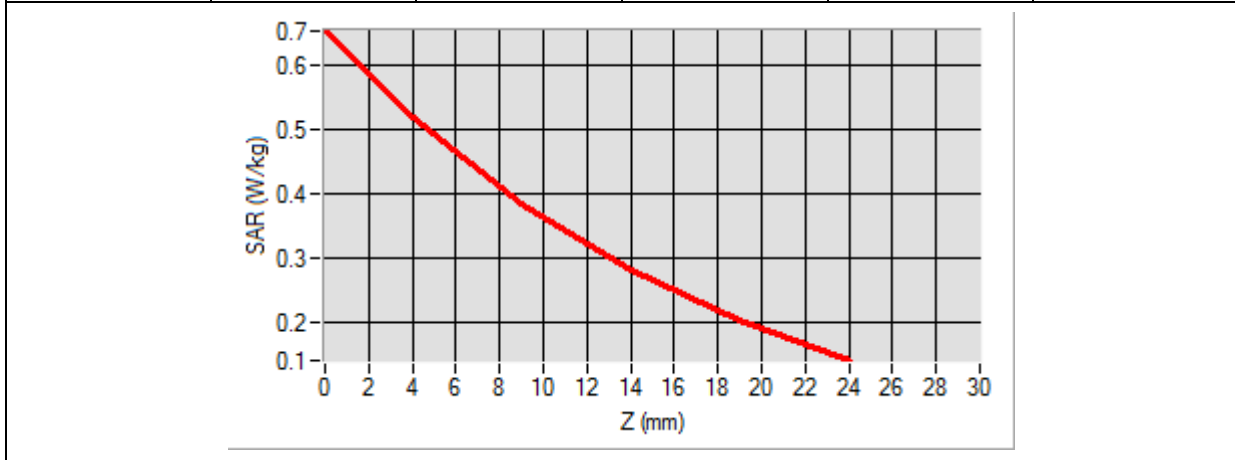

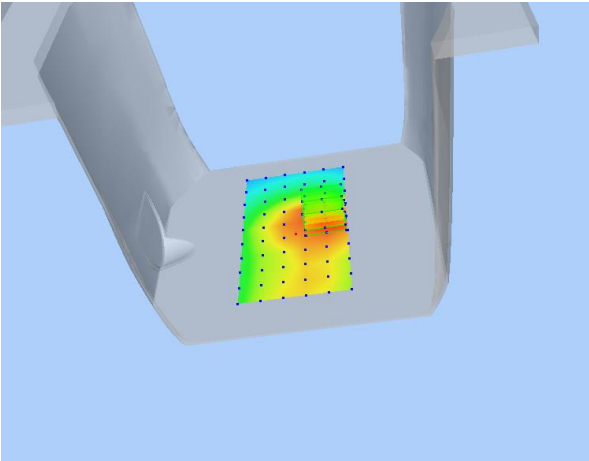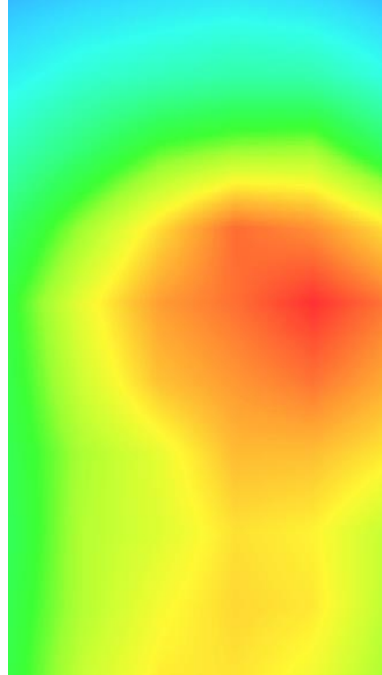3D screen shot	Hot spot position
	



# MEASUREMENT 14


Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-15  
 Measurement duration: 12 minutes 3 seconds

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back
<b>Band</b>	GSM1900
<b>Channels</b>	Low
<b>Signal</b>	TDMA (Crest factor: 8.0)

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1880.000000
<b>Relative Permittivity (real part)</b>	41.432415
<b>Conductivity (S/m)</b>	1.411966
<b>Power Variation (%)</b>	-1.100000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

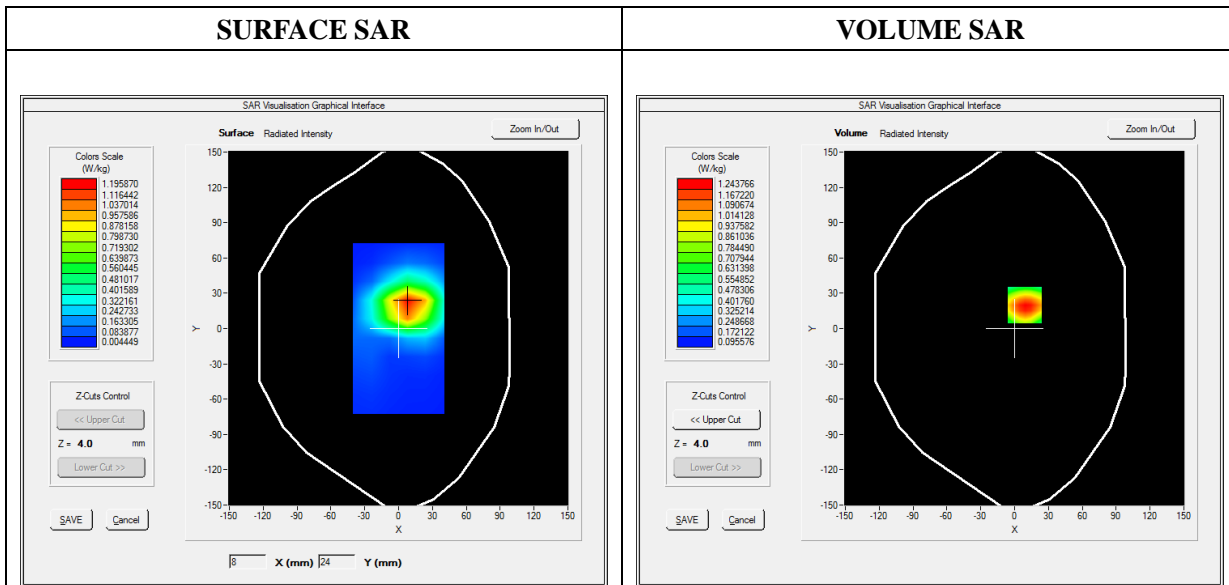


**Maximum location: X=9.00, Y=20.00**

**SAR Peak: 1.15 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.320261</b>
<b>SAR 1g (W/Kg)</b>	<b>0.666696</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>1.7315</b>	<b>1.2438</b>	<b>0.8143</b>	<b>0.5350</b>	<b>0.3558</b>

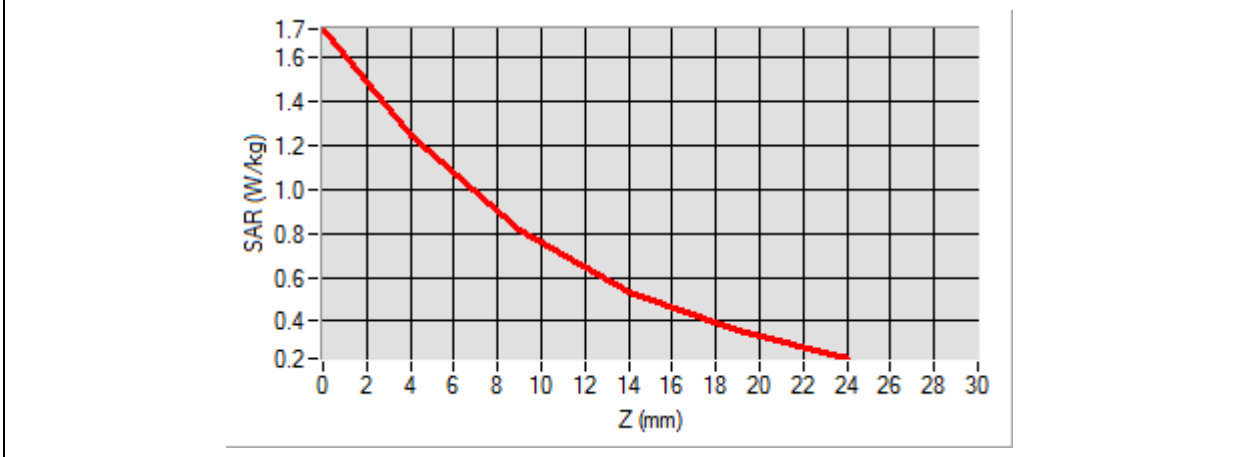

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device. A rectangular area on the front face is highlighted with a color-coded SAR distribution, showing a central red/orange hot spot that fades to blue at the edges.</p>	<p>A 2D heatmap showing the SAR distribution on the device's surface. The color scale ranges from blue (low SAR) to red (high SAR), with the highest intensity (red) concentrated in the center of the device's front face.</p>

# MEASUREMENT 15/27


Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-15  
 Measurement duration: 12 minutes 3 seconds

**A. Experimental conditions**

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back
<b>Band</b>	WCDMA1900_RMC
<b>Channels</b>	High
<b>Signal</b>	Duty Cycle 1:1

**B. SAR Measurement Results**

<b>Frequency (MHz)</b>	1907.600000
<b>Relative Permittivity (real part)</b>	42.060124
<b>Conductivity (S/m)</b>	1.413607
<b>Power Variation (%)</b>	-0.470000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

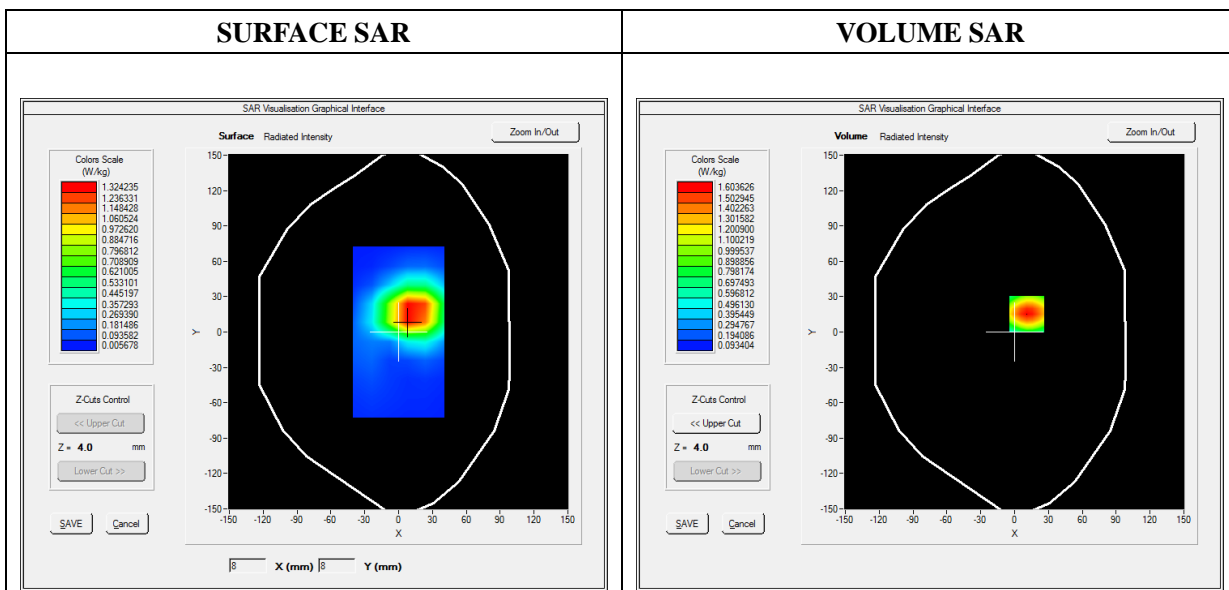


**Maximum location: X=11.00, Y=15.00**

**SAR Peak: 1.28 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.406038</b>
-----------------------	-----------------

<b>SAR 1g (W/Kg)</b>	<b>0.737884</b>
----------------------	-----------------

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>2.2818</b>	<b>1.6036</b>	<b>1.0216</b>	<b>0.6563</b>	<b>0.4313</b>

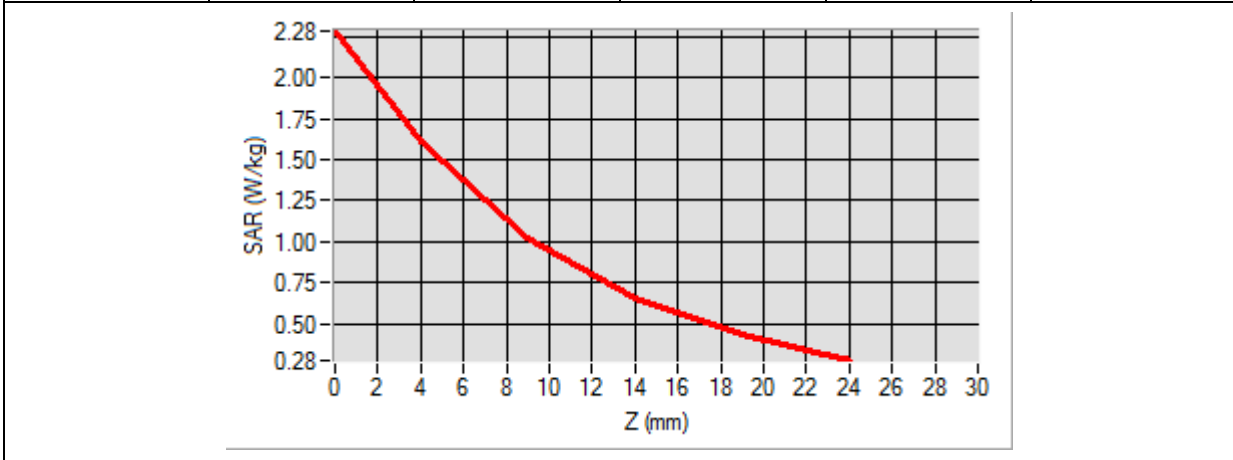

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey, L-shaped device. A small rectangular area on the inner surface of the 'L' is highlighted with a color gradient from blue to red, representing the SAR hot spot. The rest of the device is shown in a light blue color.</p>	<p>A 2D heatmap showing a central region of high intensity (red) surrounded by concentric rings of decreasing intensity (yellow, green, cyan, blue). The hot spot is centered in the upper-middle portion of the image.</p>

# MEASUREMENT 16/28


Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-15  
 Measurement duration: 12 minutes 3 seconds

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back
<b>Band</b>	WCDMA850_RMC
<b>Channels</b>	Low
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	826.400000
<b>Relative Permittivity (real part)</b>	42.751245
<b>Conductivity (S/m)</b>	0.911245
<b>Power Variation (%)</b>	-1.350000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

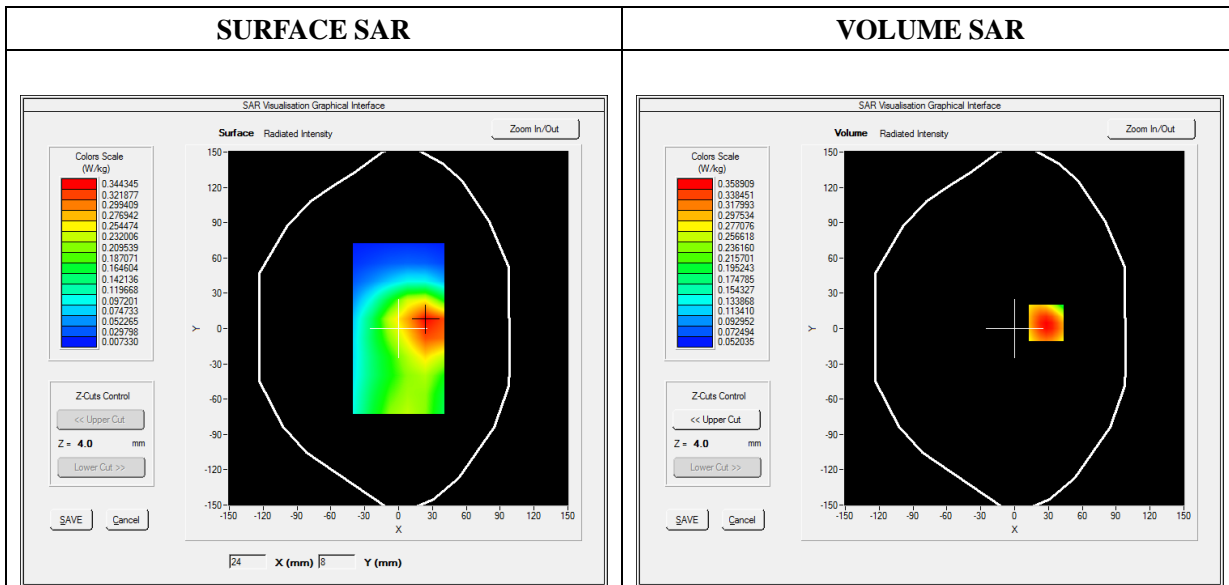


**Maximum location: X=28.00, Y=5.00**

**SAR Peak: 0.49 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.236485</b>
<b>SAR 1g (W/Kg)</b>	<b>0.343995</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.4909</b>	<b>0.3589</b>	<b>0.2439</b>	<b>0.1707</b>	<b>0.1250</b>

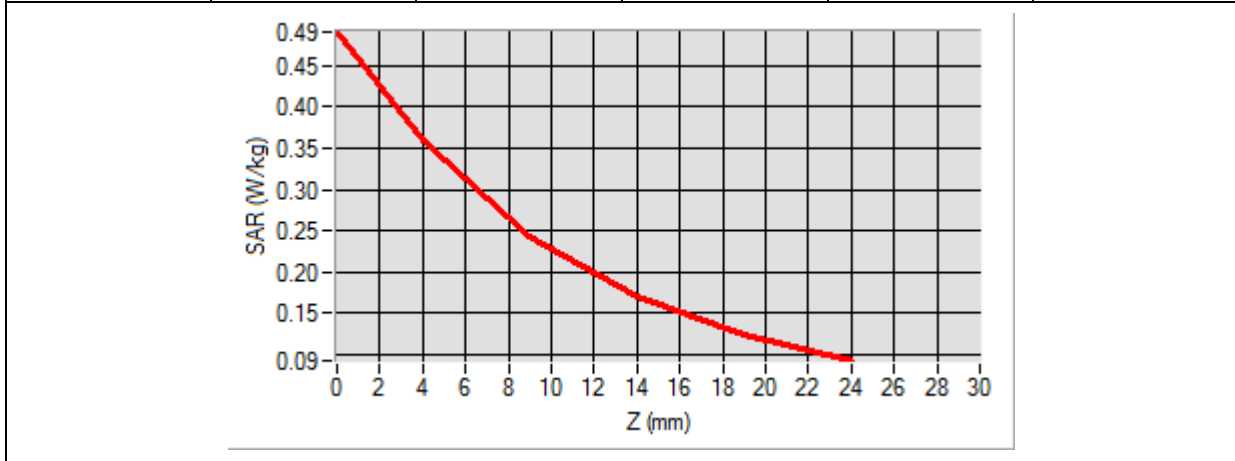

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a rectangular area on its top surface highlighted with a color-coded SAR distribution. The colors range from blue (low SAR) to red (high SAR), indicating the location of the maximum SAR value.</p>	<p>A 2D heatmap showing the SAR distribution on the device's surface. The color scale transitions from blue at the edges to red in the center, representing the highest SAR concentration (hot spot).</p>

# MEASUREMENT 17/29


Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-15  
 Measurement duration: 12 minutes 3 seconds

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back
<b>Band</b>	LTE Band 4
<b>Channels</b>	QPSK, 20MHz, 1RB, Middle
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1732.500000
<b>Relative Permittivity (real part)</b>	41.432275
<b>Conductivity (S/m)</b>	1.410987
<b>Power Variation (%)</b>	-0.860000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

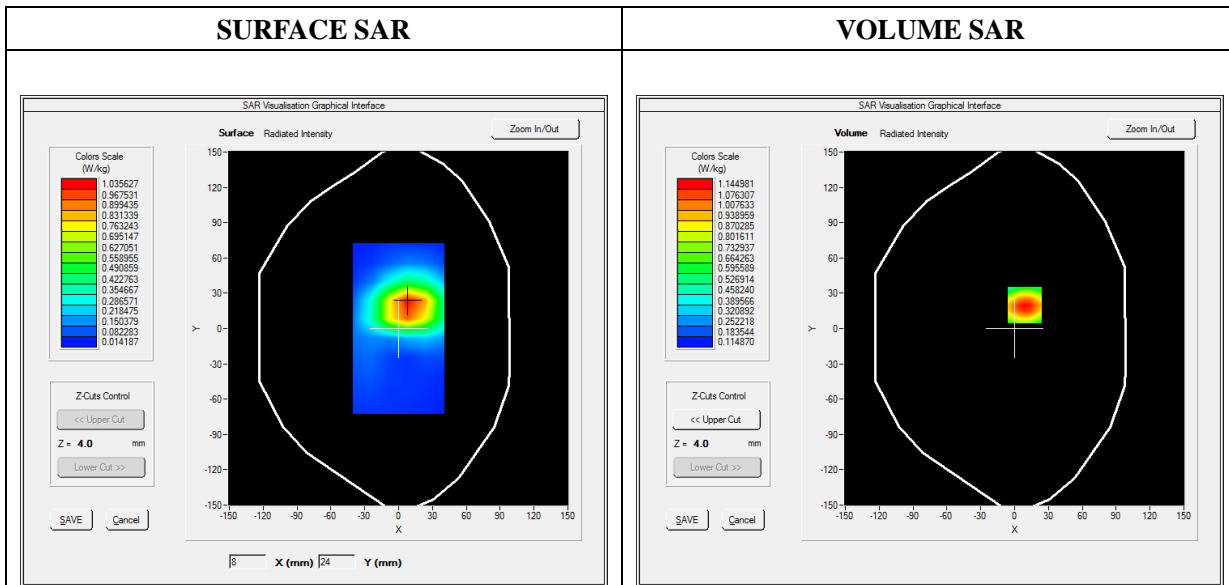




**Maximum location: X=9.00, Y=20.00**

**SAR Peak: 1.58 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.673623</b>
<b>SAR 1g (W/Kg)</b>	<b>0.770624</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>1.5751</b>	<b>1.1450</b>	<b>0.7643</b>	<b>0.5155</b>	<b>0.3547</b>

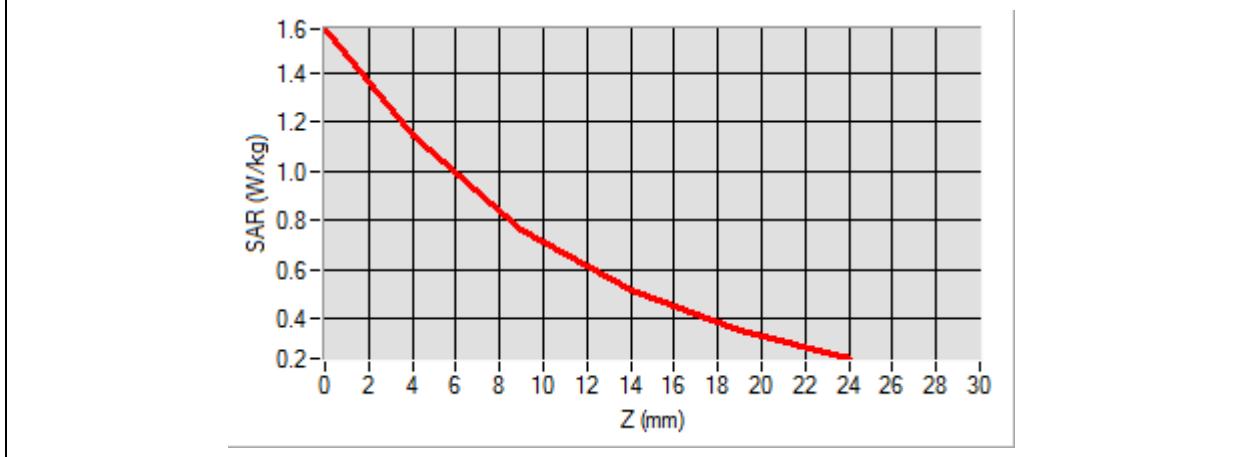

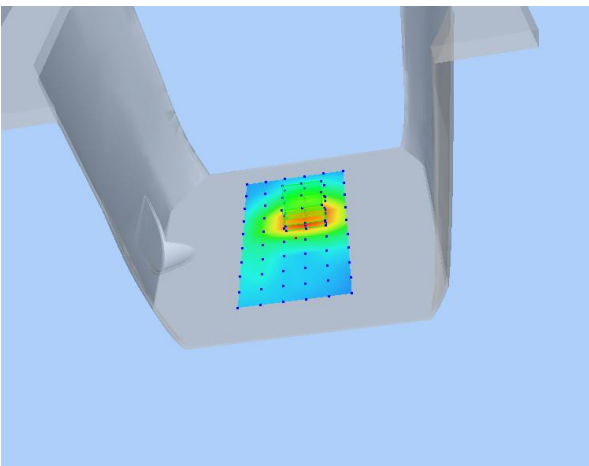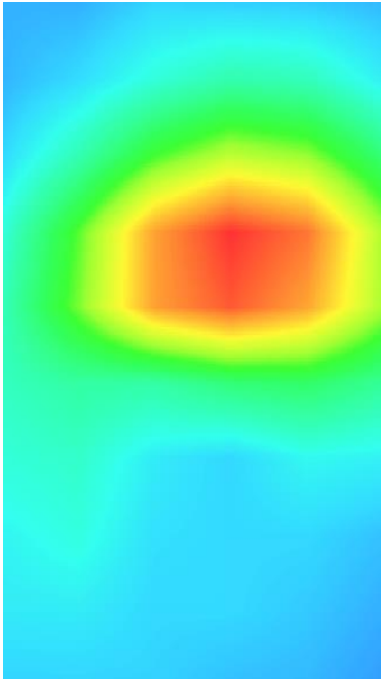3D screen shot	Hot spot position
 <p>A 3D perspective view of a grey-colored device. A rectangular area on the front face is highlighted with a color-coded heatmap, showing a central red/orange region (high SAR) transitioning to yellow, green, and blue (lower SAR) towards the edges.</p>	 <p>A 2D heatmap showing the spatial distribution of SAR. The central region is colored red and orange, indicating the highest SAR values. This is surrounded by concentric rings of yellow, green, and cyan, with the outermost regions being blue, indicating the lowest SAR values.</p>



# MEASUREMENT 18/30


Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-15  
 Measurement duration: 12 minutes 3 seconds

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back
<b>Band</b>	LTE Band 7
<b>Channels</b>	QPSK, 10MHz, 1RB, Low
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	2505.000000
<b>Relative Permittivity (real part)</b>	38.930001
<b>Conductivity (S/m)</b>	2.042787
<b>Power Variation (%)</b>	-1.010000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

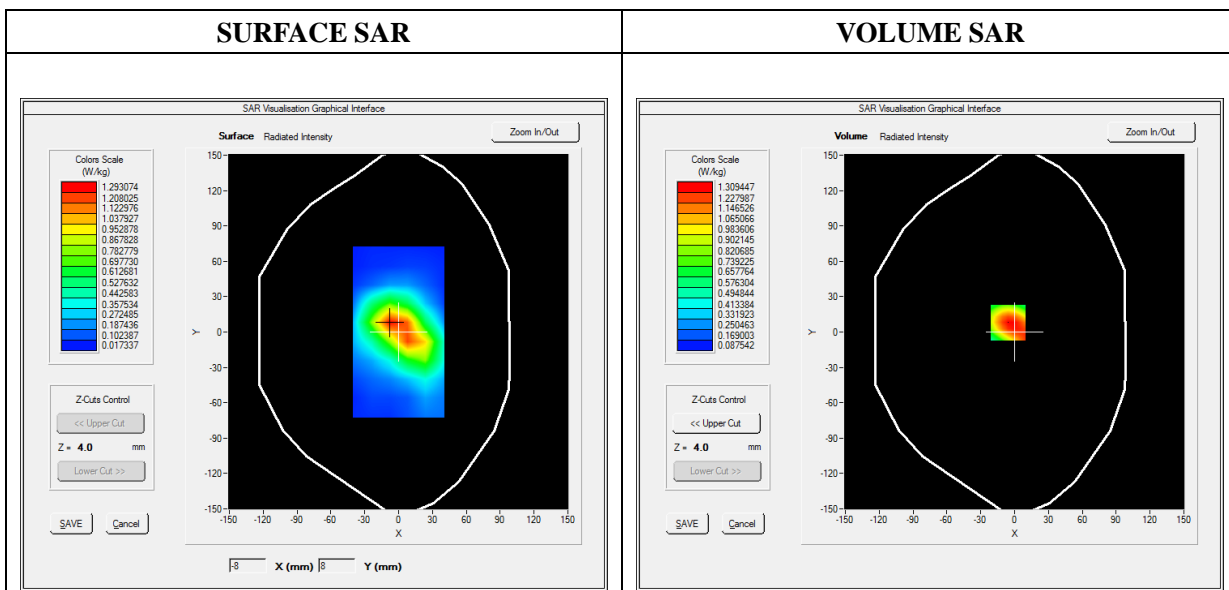



**Maximum location: X=-6.00, Y=8.00**

**SAR Peak: 1.98 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.534541</b>
-----------------------	-----------------

<b>SAR 1g (W/Kg)</b>	<b>0.737399</b>
----------------------	-----------------

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>1.9766</b>	<b>1.3094</b>	<b>0.7661</b>	<b>0.4491</b>	<b>0.2701</b>

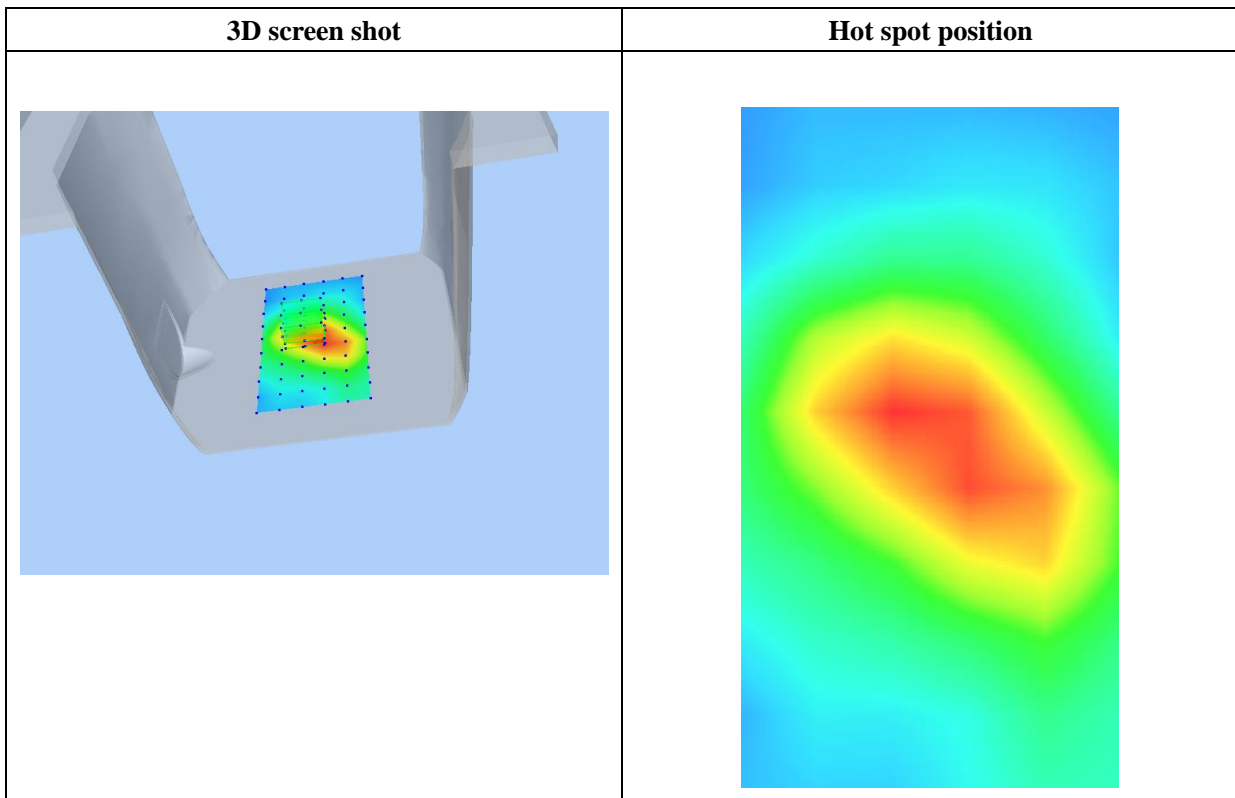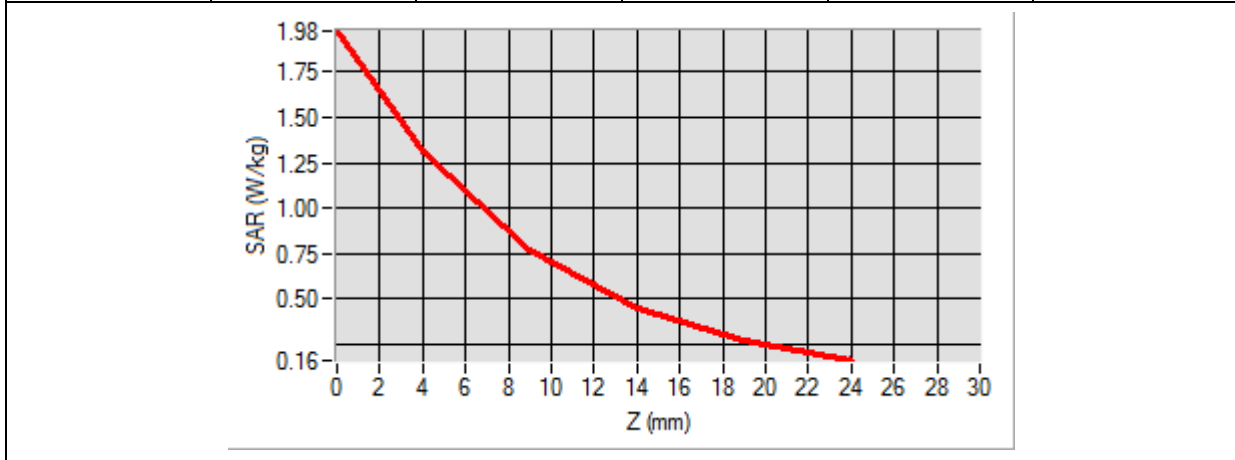

# MEASUREMENT 19/31


Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-15  
 Measurement duration: 12 minutes 3 seconds

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back
<b>Band</b>	WiFi_802.11n (20MHz)
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	2437.000000
<b>Relative Permittivity (real part)</b>	38.450600
<b>Conductivity (S/m)</b>	1.870638
<b>Power Variation (%)</b>	0.360000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

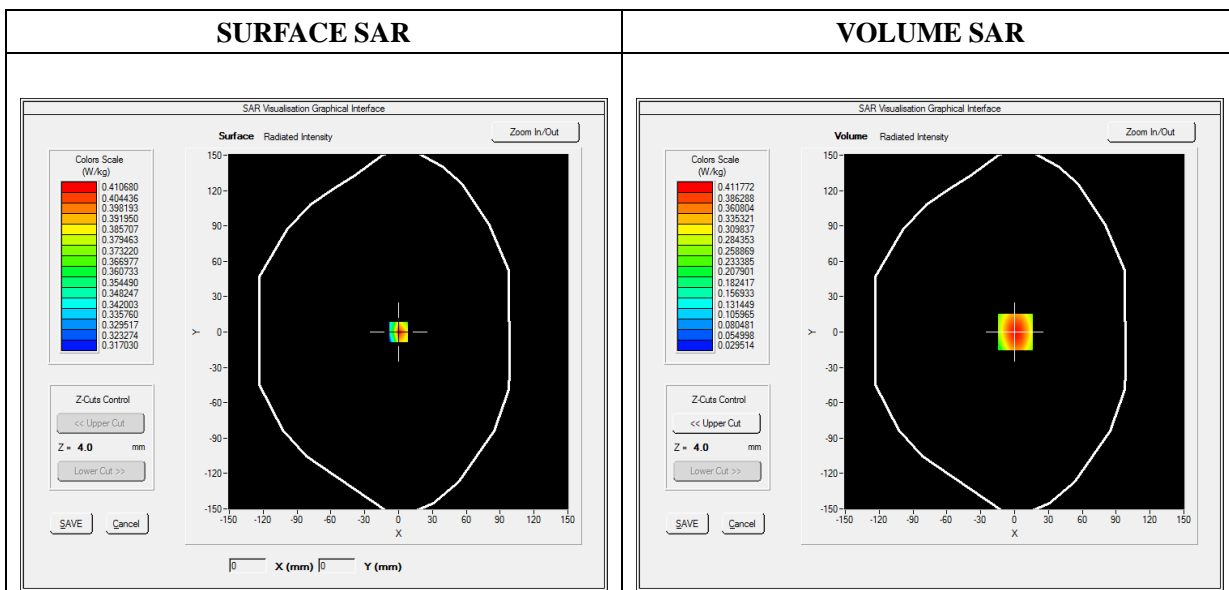



**Maximum location: X=1.00, Y=0.00**

**SAR Peak: 0.62 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.230426</b>
-----------------------	-----------------

<b>SAR 1g (W/Kg)</b>	<b>0.387550</b>
----------------------	-----------------

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.6118</b>	<b>0.4118</b>	<b>0.2460</b>	<b>0.1468</b>	<b>0.0890</b>

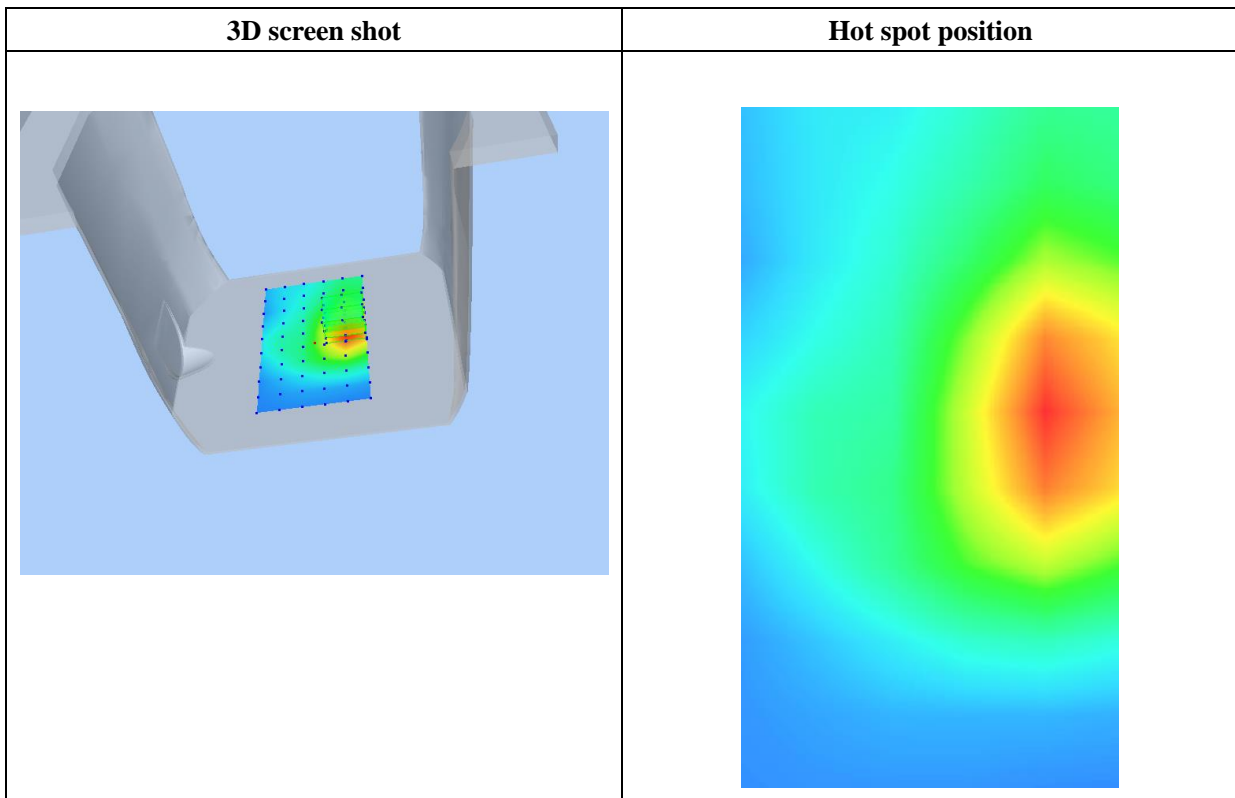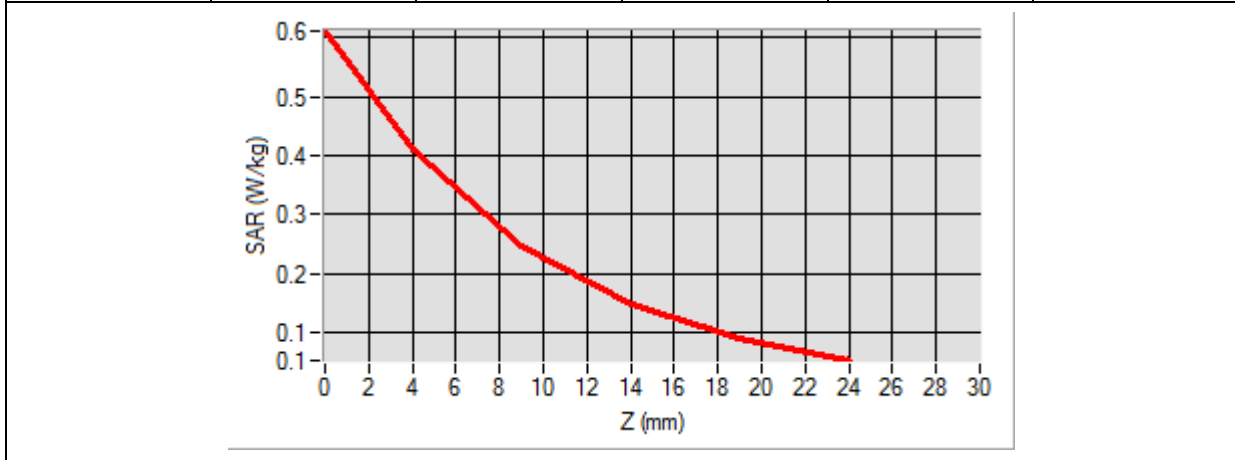

# MEASUREMENT 20/32


Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-15  
 Measurement duration: 12 minutes 3 seconds

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back
<b>Band</b>	Bluetooth
<b>Channels</b>	High
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	2480.000000
<b>Relative Permittivity (real part)</b>	38.450600
<b>Conductivity (S/m)</b>	1.873880
<b>Power Variation (%)</b>	0.360000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

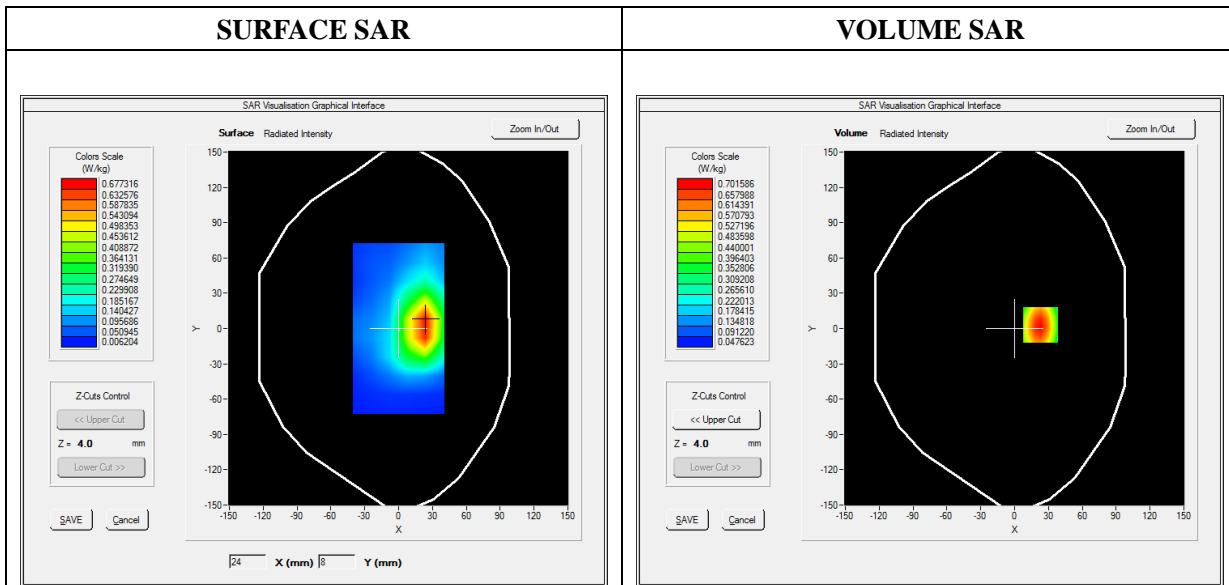


**Maximum location: X=23.00, Y=3.00**

**SAR Peak: 0.82 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.192059</b>
<b>SAR 1g (W/Kg)</b>	<b>0.256963</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.8120</b>	<b>0.5016</b>	<b>0.3356</b>	<b>0.2088</b>	<b>0.1163</b>

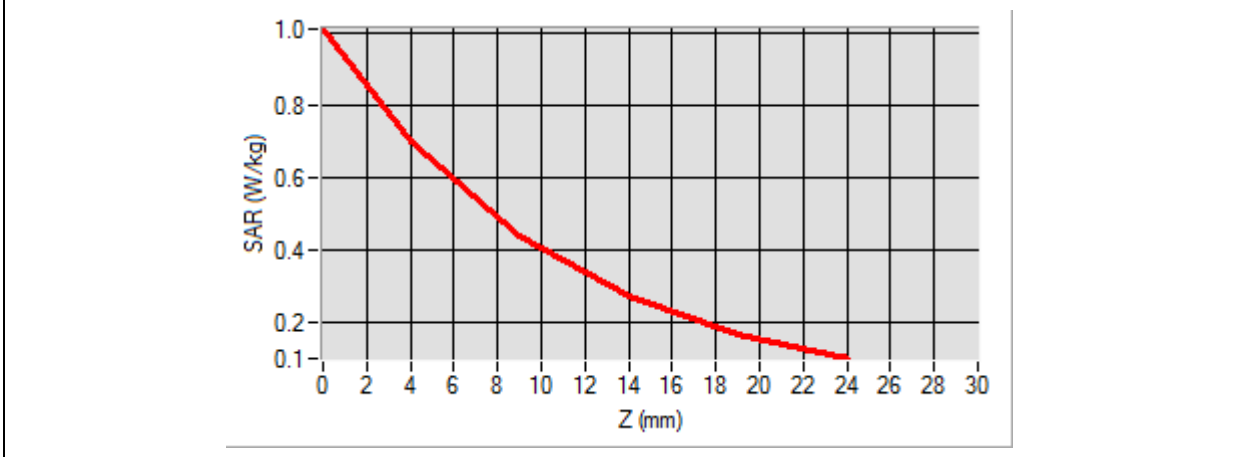

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a blue grid overlay. A color-coded hot spot is visible on the device's surface, with red indicating the highest SAR value and blue indicating the lowest.</p>	<p>A 2D heatmap showing the spatial distribution of SAR. The highest intensity (red) is concentrated in a central region, with intensity decreasing towards the edges (blue).</p>

# MEASUREMENT 21/33

Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-15  
 Measurement duration: 12 minutes 3 seconds


**A. Experimental conditions**

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back
<b>Band</b>	WiFi(5.2GHz)_802.11ac (40MHz)
<b>Channels</b>	Low
<b>Signal</b>	Duty Cycle: 1:1

**B. SAR Measurement Results**

<b>Frequency (MHz)</b>	5190.000000
<b>Relative Permittivity (real part)</b>	37.633869
<b>Conductivity (S/m)</b>	4.940761
<b>Power Variation (%)</b>	-1.150000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

**C. SAR Surface and Volume**

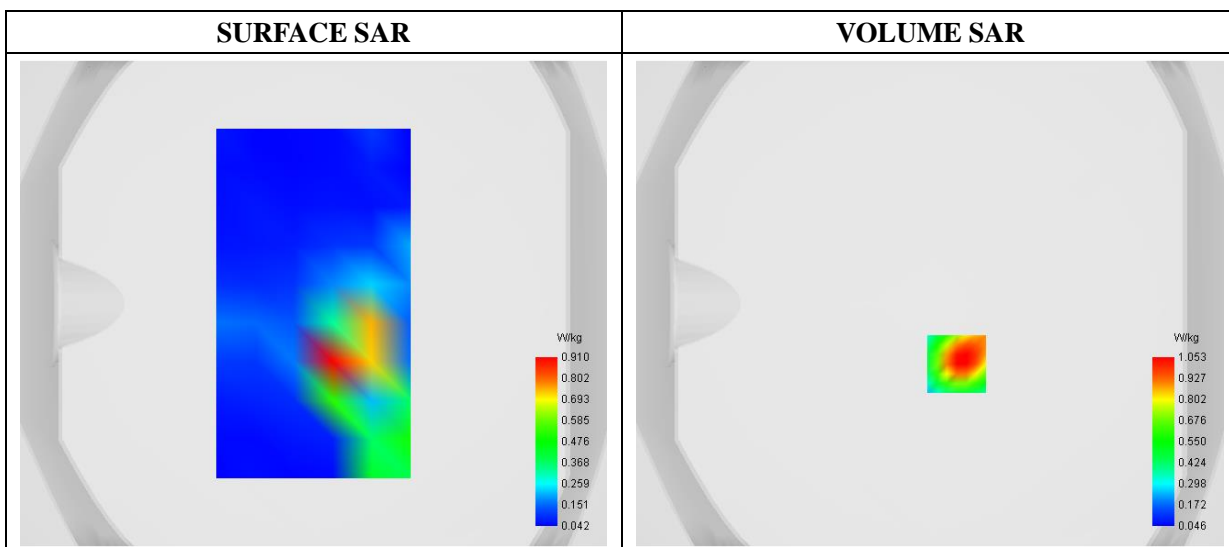


**Maximum location: X=11.00, Y=-25.00**

**D. SAR 1g & 10g**


<b>SAR 10g (W/Kg)</b>	<b>0.303065</b>
<b>SAR 1g (W/Kg)</b>	<b>0.535842</b>

**E. Z Axis Scan**

<b>Z (mm)</b>	<b>0.00</b>	<b>2.00</b>	<b>4.00</b>	<b>6.00</b>	<b>8.00</b>	<b>10.00</b>	<b>12.00</b>	<b>14.00</b>	<b>16.00</b>
<b>SAR (W/Kg)</b>	<b>1.5751</b>	<b>1.0133</b>	<b>0.5578</b>	<b>0.5227</b>	<b>0.3095</b>	<b>0.2796</b>	<b>0.1542</b>	<b>0.1472</b>	<b>0.1047</b>

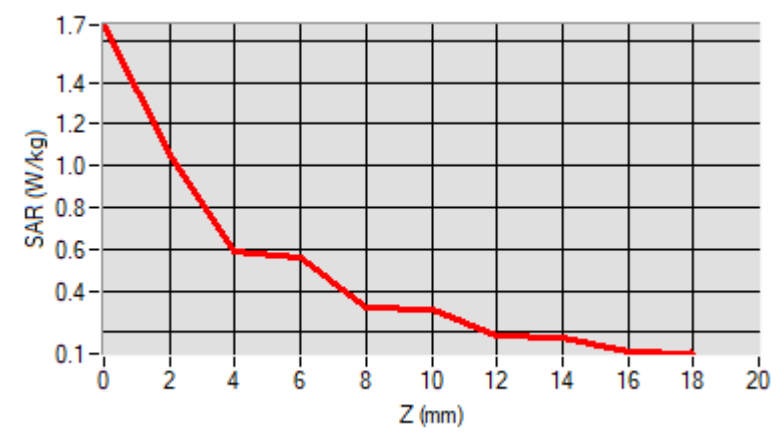

**F. 3D Image**

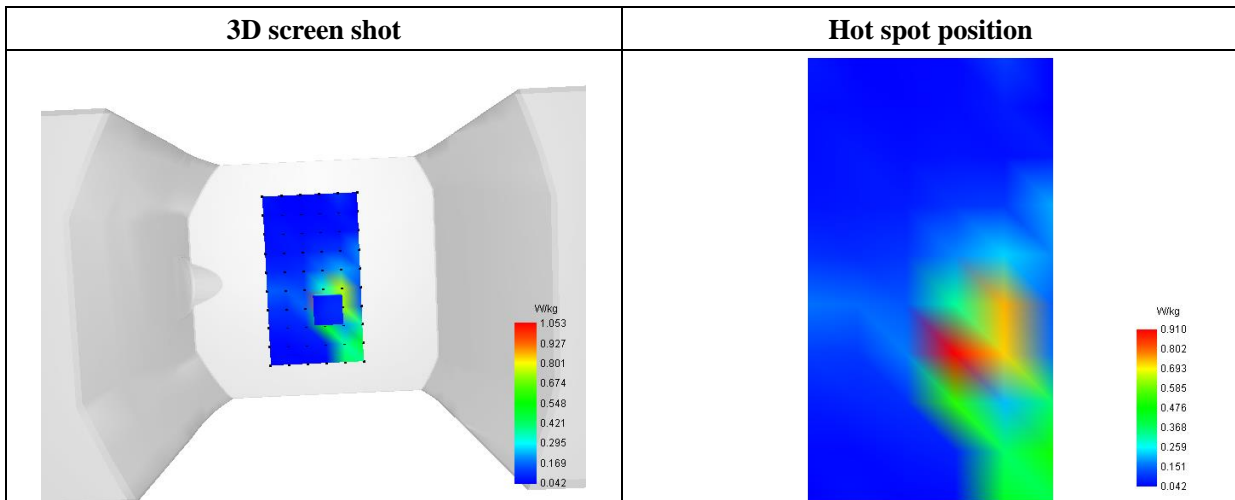



# MEASUREMENT 22/34

Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-16  
 Measurement duration: 12 minutes 3 seconds


**A. Experimental conditions**

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back
<b>Band</b>	WiFi(5.3GHz)_802.11n (40MHz)
<b>Channels</b>	Low
<b>Signal</b>	Duty Cycle: 1:1

**B. SAR Measurement Results**

<b>Frequency (MHz)</b>	5270.000000
<b>Relative Permittivity (real part)</b>	36.960839
<b>Conductivity (S/m)</b>	5.370192
<b>Power Variation (%)</b>	1.110000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

**C. SAR Surface and Volume**

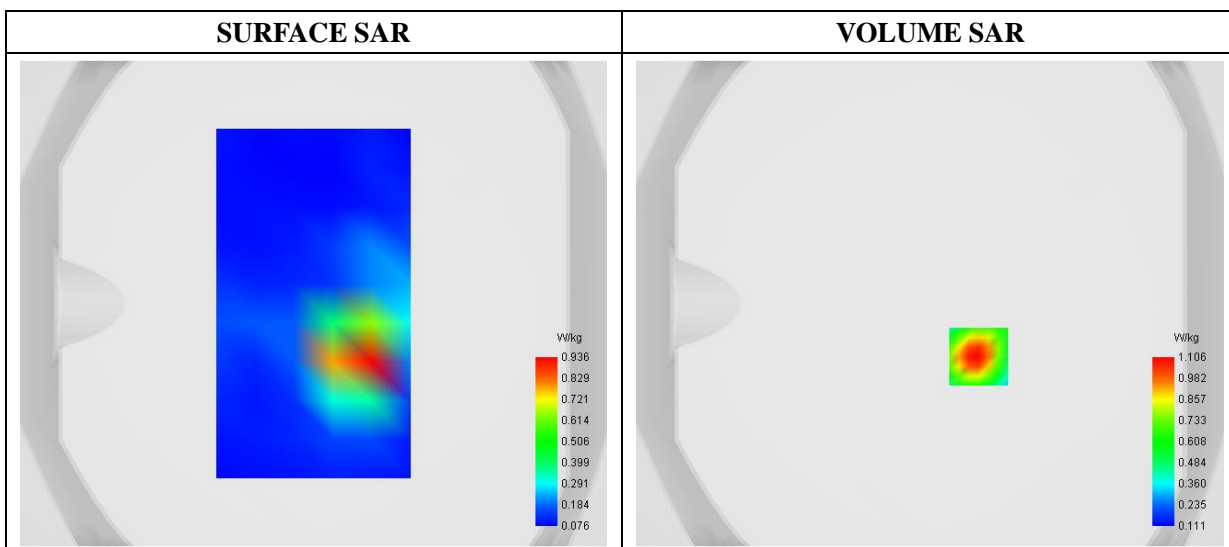


**Maximum location: X=20.00, Y=-22.00**

**D. SAR 1g & 10g**


<b>SAR 10g (W/Kg)</b>	<b>0.302881</b>
<b>SAR 1g (W/Kg)</b>	<b>0.567661</b>

**E. Z Axis Scan**

<b>Z (mm)</b>	<b>0.00</b>	<b>2.00</b>	<b>4.00</b>	<b>6.00</b>	<b>8.00</b>	<b>10.00</b>	<b>12.00</b>	<b>14.00</b>	<b>16.00</b>
<b>SAR (W/Kg)</b>	<b>1.4117</b>	<b>1.0061</b>	<b>0.7834</b>	<b>0.6008</b>	<b>0.4555</b>	<b>0.3408</b>	<b>0.3043</b>	<b>0.2068</b>	<b>0.1516</b>

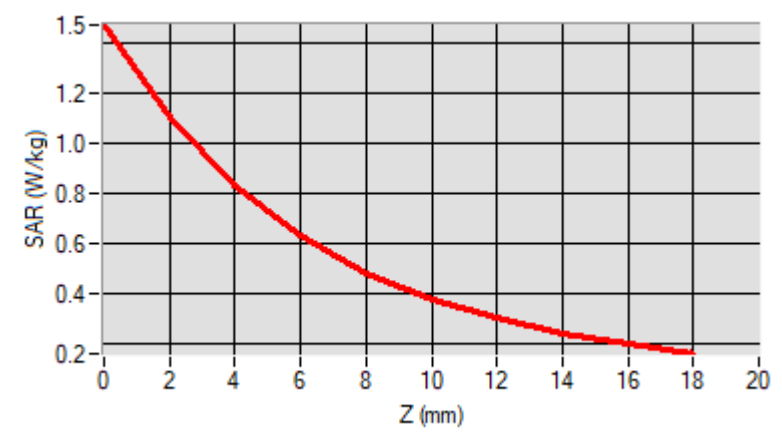

**F. 3D Image**

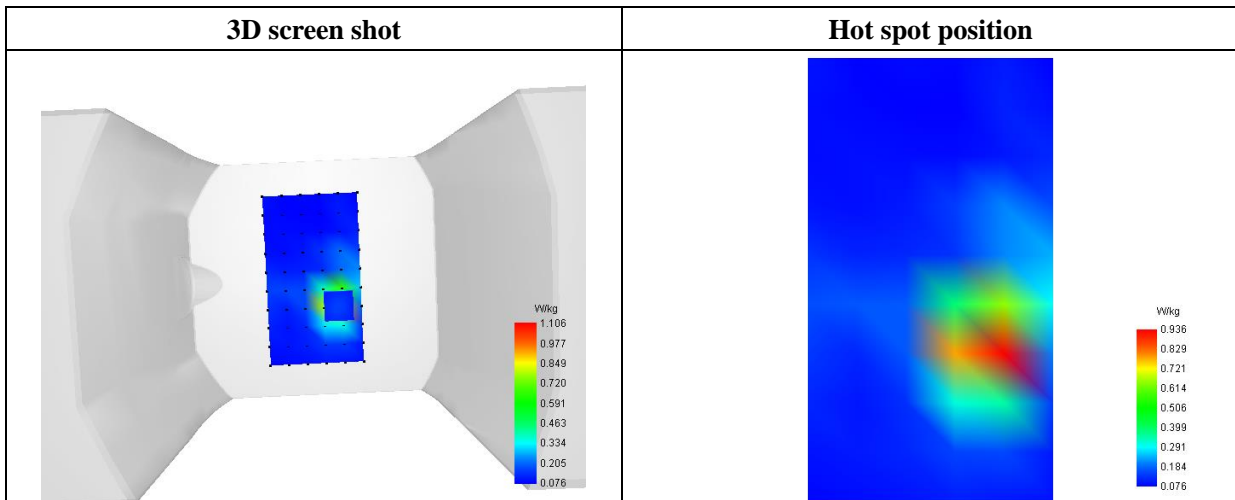

# MEASUREMENT 23/35

Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-16  
 Measurement duration: 12 minutes 21 seconds


**A. Experimental conditions**

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Top
<b>Band</b>	WiFi(5.6GHz)_802.11ac (80MHz)
<b>Channels</b>	High
<b>Signal</b>	Duty Cycle: 1:1

**B. SAR Measurement Results**

<b>Frequency (MHz)</b>	5610.000000
<b>Relative Permittivity (real part)</b>	36.360963
<b>Conductivity (S/m)</b>	5.142781
<b>Power Variation (%)</b>	0.750000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

**C. SAR Surface and Volume**

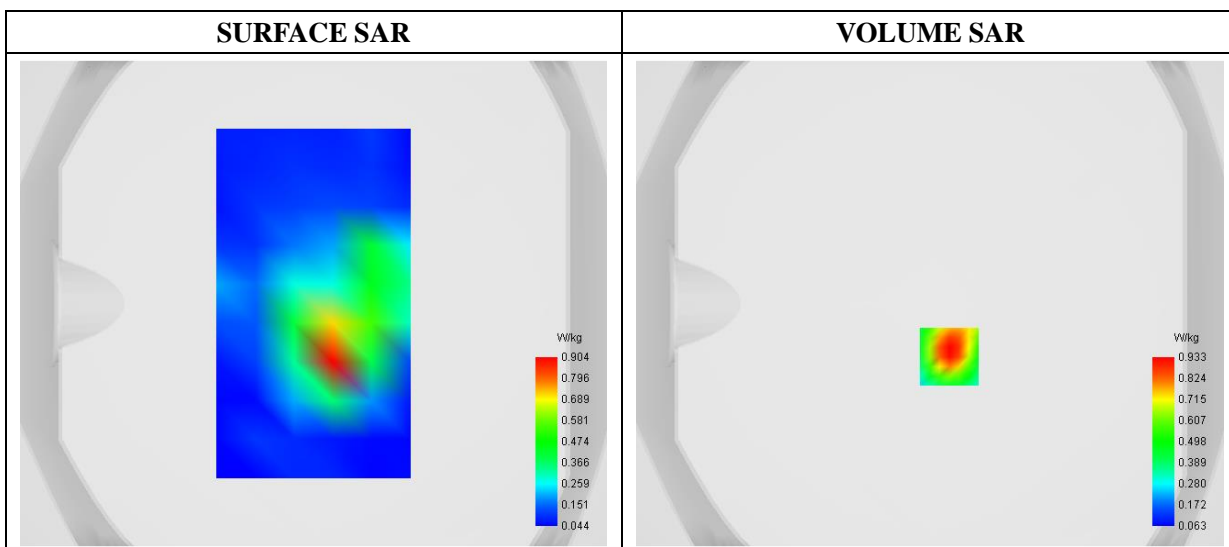


**Maximum location: X=8.00, Y=-22.00**

**D. SAR 1g & 10g**


<b>SAR 10g (W/Kg)</b>	<b>0.220697</b>
<b>SAR 1g (W/Kg)</b>	<b>0.458237</b>

**E. Z Axis Scan**

<b>Z (mm)</b>	<b>0.00</b>	<b>2.00</b>	<b>4.00</b>	<b>6.00</b>	<b>8.00</b>	<b>10.00</b>	<b>12.00</b>	<b>14.00</b>	<b>16.00</b>	<b>18.00</b>
<b>SAR (W/Kg)</b>	<b>1.0706</b>	<b>0.7327</b>	<b>0.5187</b>	<b>0.3946</b>	<b>0.2632</b>	<b>0.2066</b>	<b>0.1523</b>	<b>0.1065</b>	<b>0.0573</b>	<b>0.0573</b>

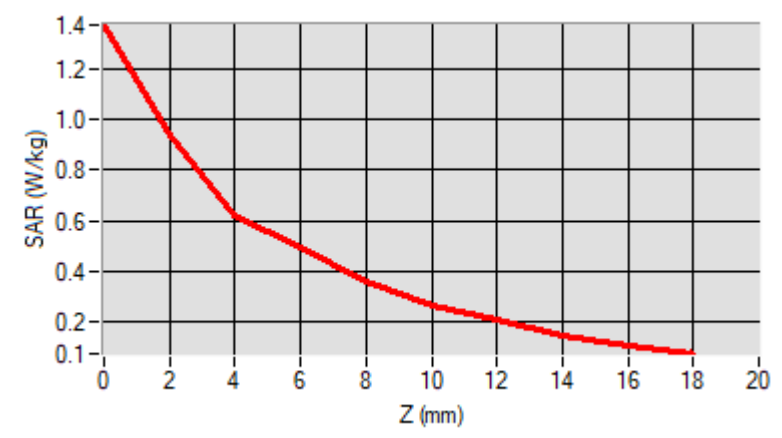

**F. 3D Image**

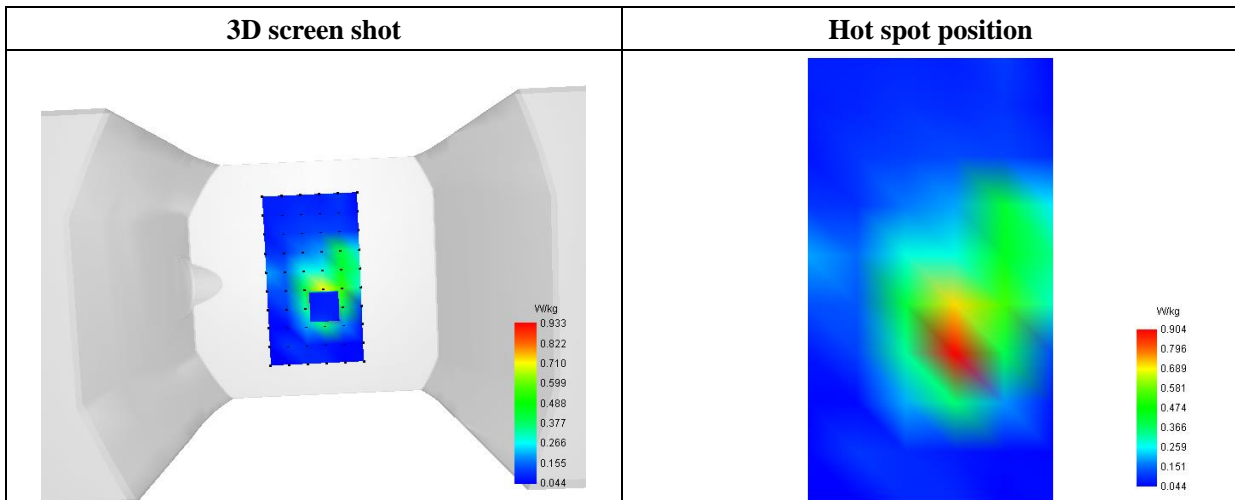

# MEASUREMENT 24/36

Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-16  
 Measurement duration: 12 minutes 21 seconds


**A. Experimental conditions**

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Top
<b>Band</b>	WiFi(5.8GHz)_802.11n (20MHz)
<b>Channels</b>	Low
<b>Signal</b>	Duty Cycle: 1:1

**B. SAR Measurement Results**

<b>Frequency (MHz)</b>	5745.000000
<b>Relative Permittivity (real part)</b>	36.292273
<b>Conductivity (S/m)</b>	5.130836
<b>Power Variation (%)</b>	-1.330000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

**C. SAR Surface and Volume**

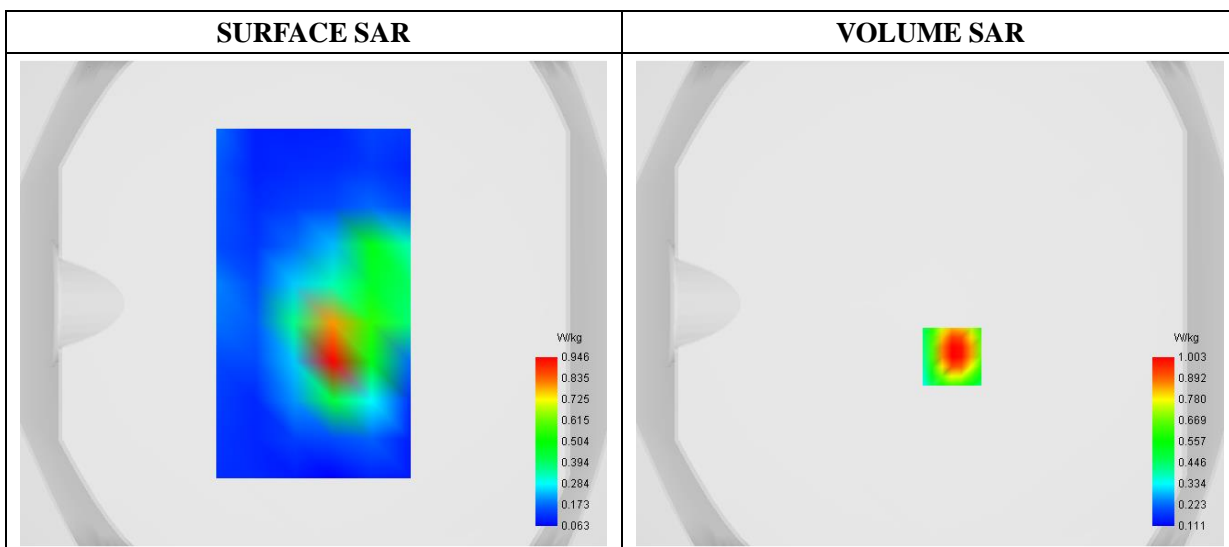


**Maximum location: X=9.00, Y=-22.00**

**D. SAR 1g & 10g**


<b>SAR 10g (W/Kg)</b>	<b>0.222710</b>
<b>SAR 1g (W/Kg)</b>	<b>0.577127</b>

**E. Z Axis Scan**

<b>Z (mm)</b>	<b>0.00</b>	<b>2.00</b>	<b>4.00</b>	<b>6.00</b>	<b>8.00</b>	<b>10.00</b>	<b>12.00</b>	<b>14.00</b>	<b>16.00</b>	<b>18.00</b>
<b>SAR (W/Kg)</b>	<b>1.0752</b>	<b>0.9031</b>	<b>0.6333</b>	<b>0.4398</b>	<b>0.3072</b>	<b>0.2563</b>	<b>0.2033</b>	<b>0.1506</b>	<b>0.1052</b>	<b>0.1052</b>

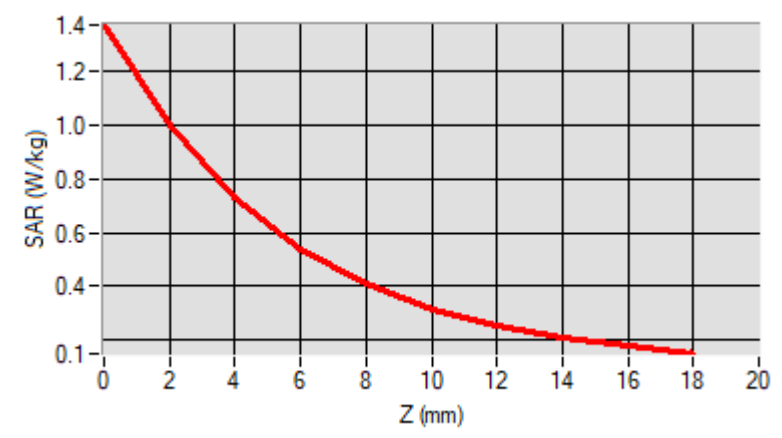

**F. 3D Image**

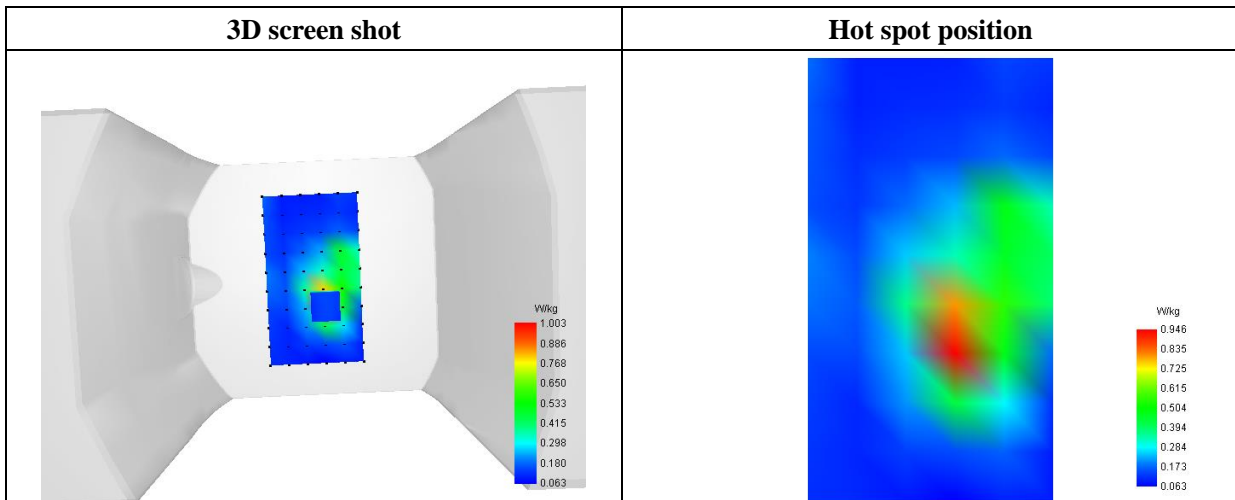

# MEASUREMENT 25


Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-15  
 Measurement duration: 12 minutes 3 seconds

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat plane
<b>Device Position</b>	Back
<b>Band</b>	GPRS850_4TX
<b>Channels</b>	Low
<b>Signal</b>	Duty Cycle: 1:2

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	824.200000
<b>Relative Permittivity (real part)</b>	42.751264
<b>Conductivity (S/m)</b>	0.910645
<b>Power Variation (%)</b>	1.108572
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

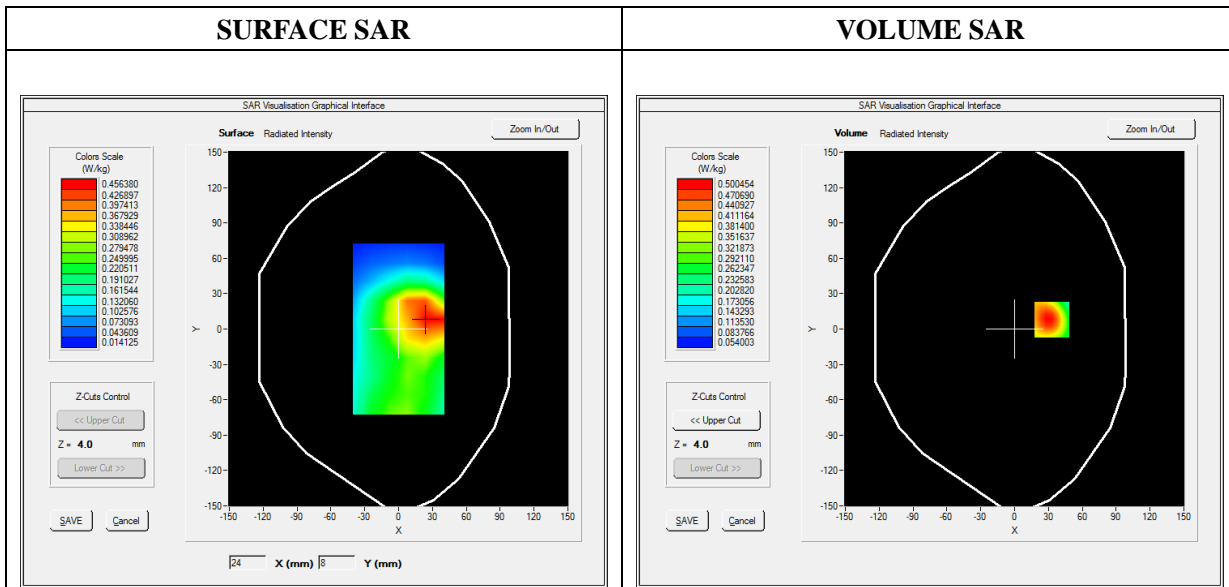


**Maximum location: X=33.00, Y=8.00**

**SAR Peak: 0.75 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.308350</b>
-----------------------	-----------------

<b>SAR 1g (W/Kg)</b>	<b>0.477159</b>
----------------------	-----------------

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>1.1011</b>	<b>0.5005</b>	<b>0.2749</b>	<b>0.2143</b>	<b>0.1328</b>

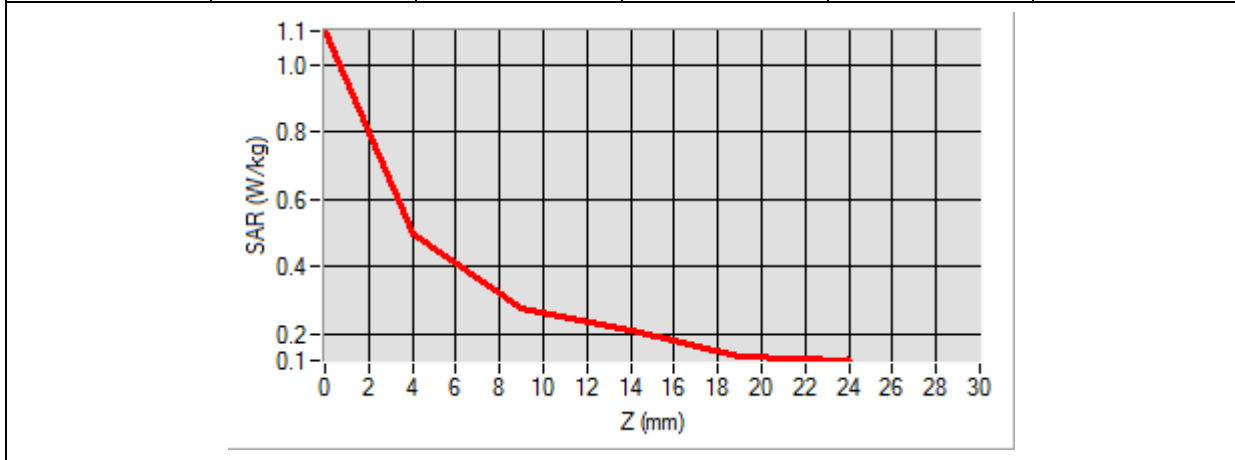

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device with a rectangular area on its top surface highlighted with a color gradient from blue to red, indicating the location of the maximum SAR exposure.</p>	<p>A 2D heatmap showing the spatial distribution of SAR exposure. The highest intensity (red) is concentrated in the center of the device's top surface, with intensity decreasing (yellow, green, cyan) towards the edges.</p>



# MEASUREMENT 26


Type: Phone measurement (Complete)  
 Date of measurement: 2022-06-15  
 Measurement duration: 12 minutes 3 seconds

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat plane
<b>Device Position</b>	Top
<b>Band</b>	GPRS1900_4TX
<b>Channels</b>	Low
<b>Signal</b>	Duty Cycle: 1:2

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1850.200000
<b>Relative Permittivity (real part)</b>	41.430415
<b>Conductivity (S/m)</b>	1.410966
<b>Power Variation (%)</b>	-0.730000
<b>Ambient Temperature</b>	22.2
<b>Liquid Temperature</b>	22.2

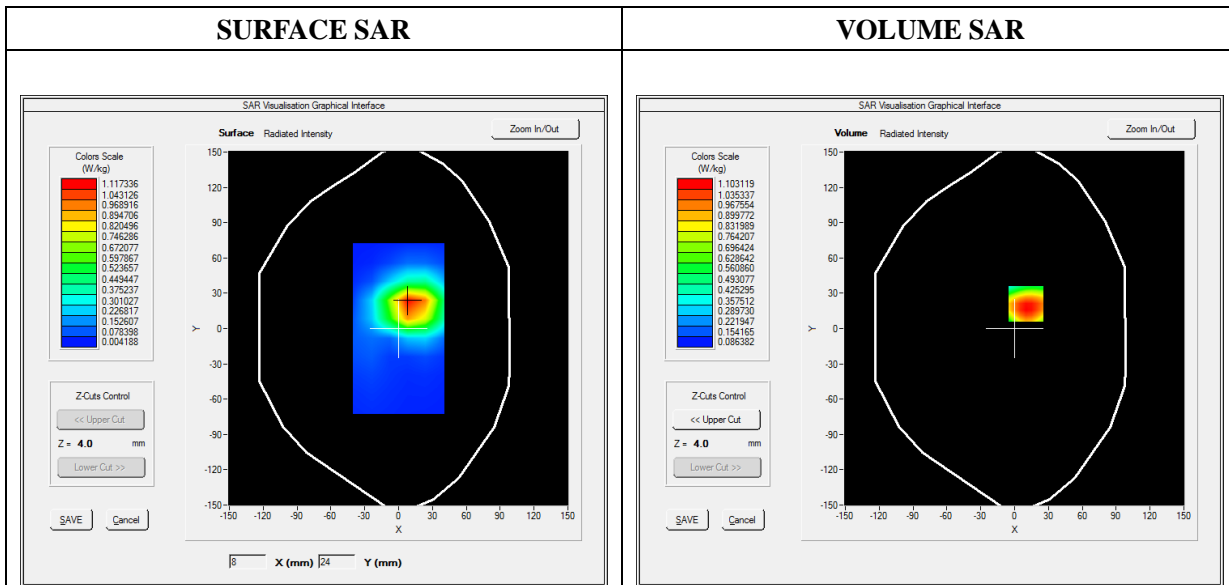


**Maximum location: X=10.00, Y=21.00**

**SAR Peak: 1.60 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.451944</b>
<b>SAR 1g (W/Kg)</b>	<b>0.752283</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>1.8844</b>	<b>1.1031</b>	<b>0.6468</b>	<b>0.4432</b>	<b>0.3032</b>

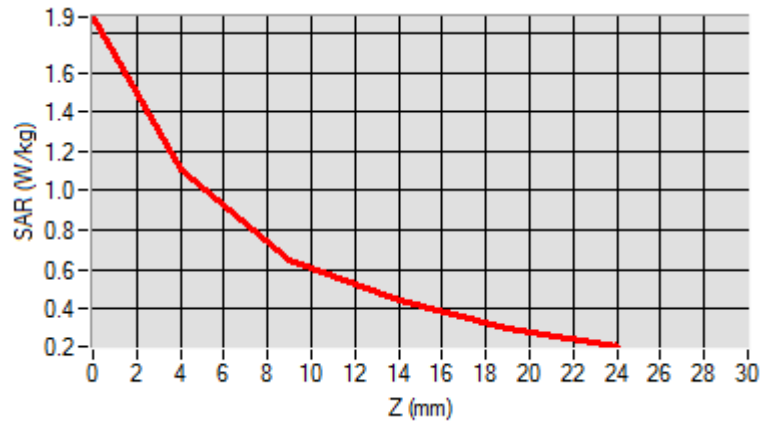

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device. A rectangular area on the front face is highlighted with a color gradient from blue (low SAR) to red (high SAR), indicating the location of the maximum SAR value.</p>	<p>A 2D heatmap showing the SAR distribution. The highest SAR value is represented by a red/orange circular region in the center, surrounded by concentric rings of yellow, green, and cyan, indicating decreasing SAR values towards the edges.</p>


## Annex C. EUT Photos

---


### EUT View 1



### EUT View Back

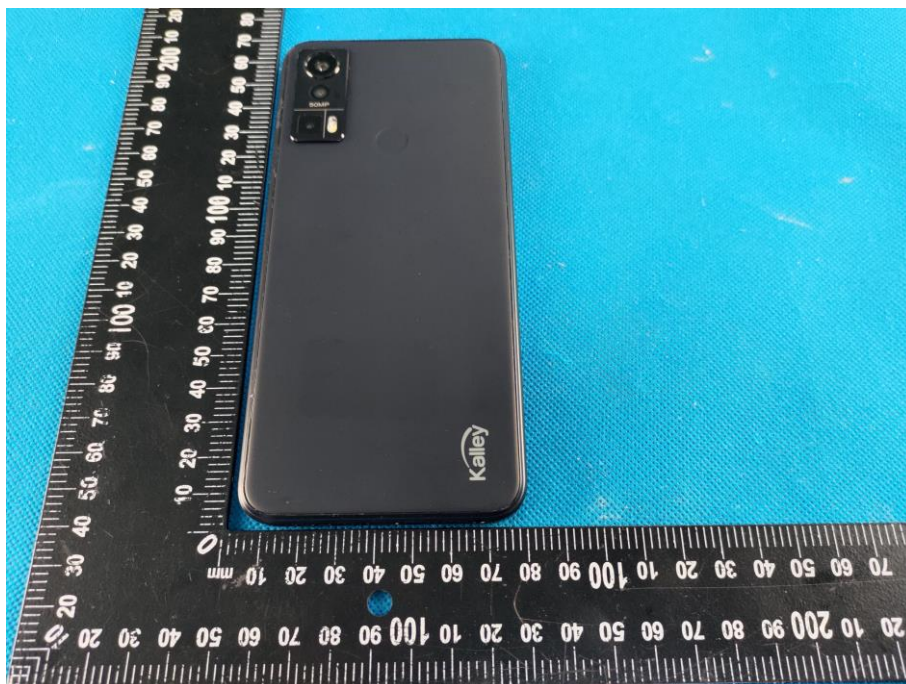

Antenna View

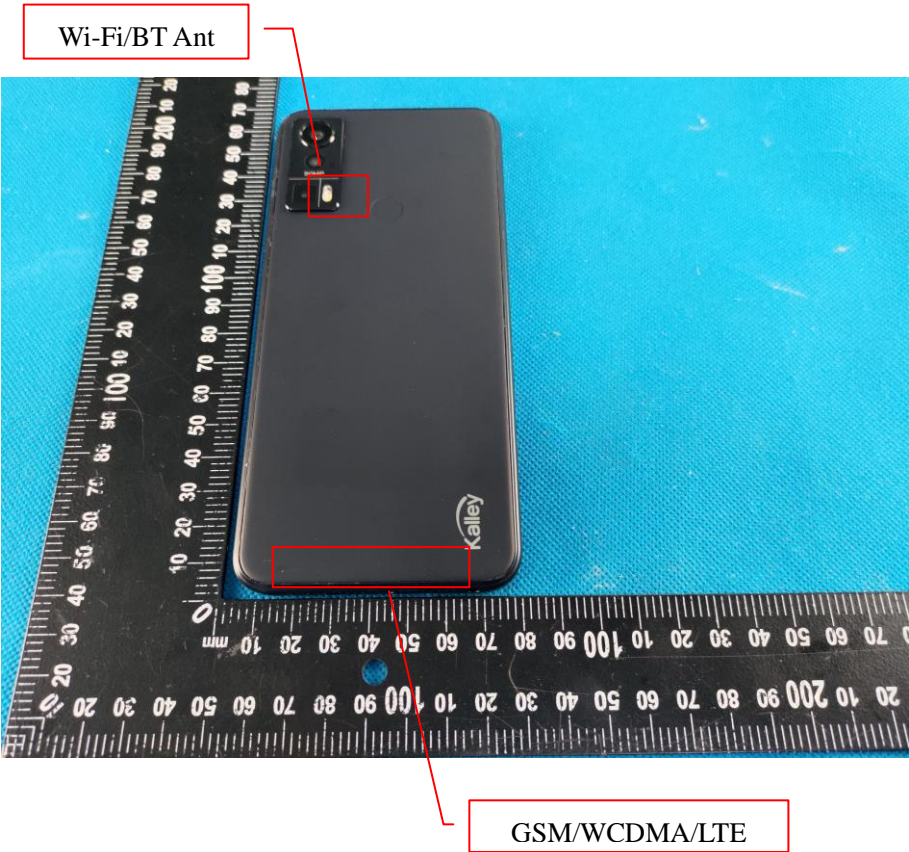


## Annex D. Test Setup Photos

---

### Head Exposure Conditions


**Right Cheek**

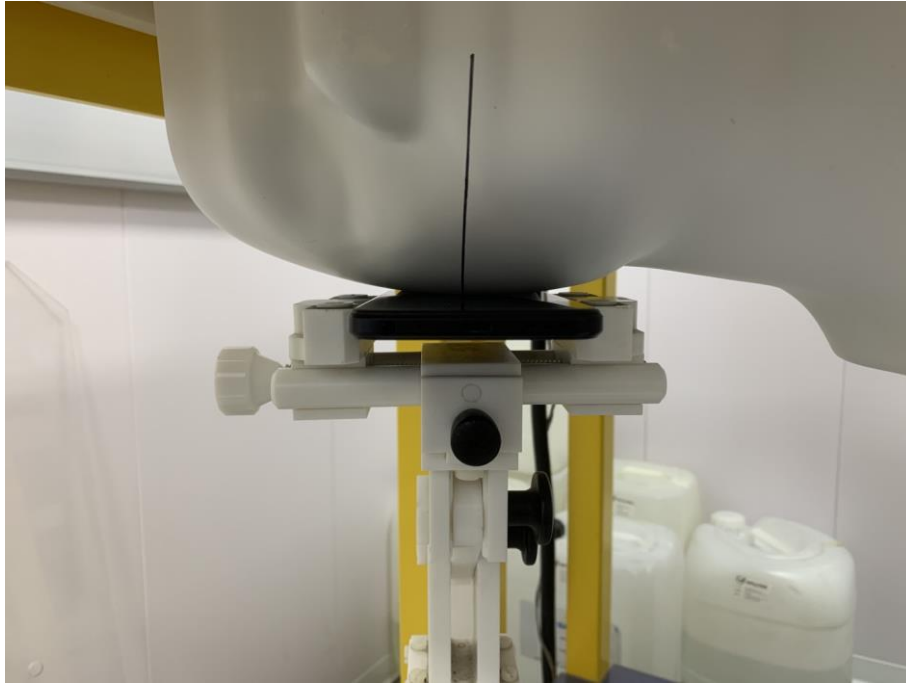

**Tilt**



**Left Cheek**

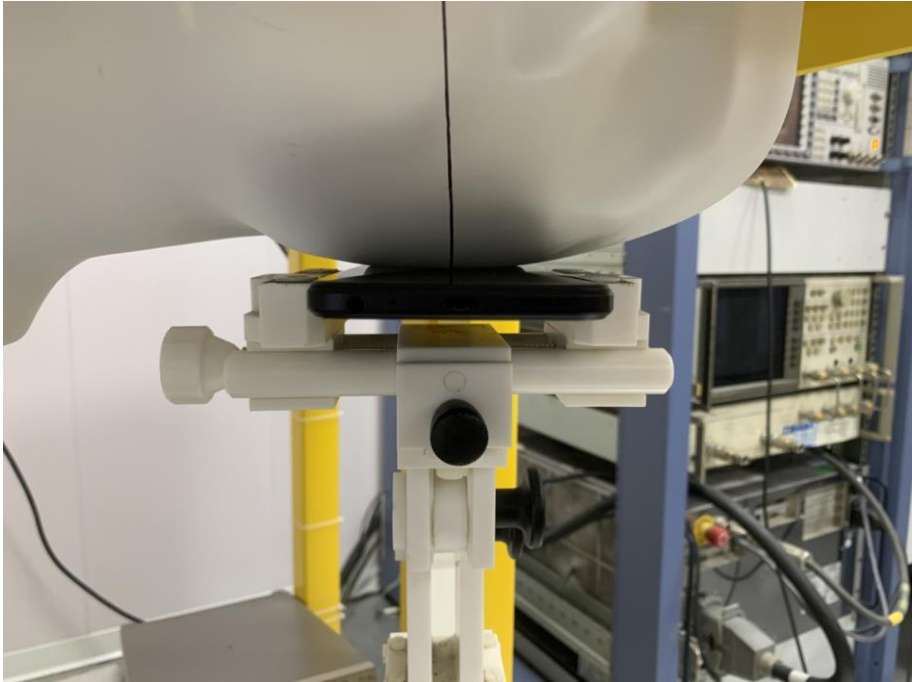

**Tilt**



**Body mode Exposure Conditions**

**Test distance: 10mm**

**Body Front**



**Body Back**



**Body Right**



**Body Left**





**Body Top**



**Body Bottom**



## **Annex E. Calibration Certificate**

---

*Please refer to the exhibit for the calibration certificate*

**\*\*\*\*\* END OF REPORT \*\*\*\*\***