

S

T

S

L

A

B



FCC TEST REPORT

Report No: STS1710071W01

Issued for

NextD Technologies, Inc.

101 W. Broadway, Suite 300, San Diego, CA 92101, USA

Product Name:	NextD Smart TV Player
Brand Name:	NextD
Model Name:	N2
Series Model:	N2S, N2C
FCC ID:	2AEPYN2
Test Standard:	FCC Part 15.407

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS. All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.
1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail: sts@stsapp.com





TEST RESULT CERTIFICATION

Applicant's name : NextD Technologies, Inc.

Address : 101 W. Broadway, Suite 300, San Diego, CA 92101, USA

Manufacture's Name : NextD Technologies, Inc.

Address : 101 W. Broadway, Suite 300, San Diego, CA 92101, USA

Product description

Product Name..... : NextD Smart TV Player

Brand Name : NextD

Model Name : N2

Series Model..... : N2S, N2C

Test Standards..... : FCC Part15.407

Test procedure..... ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC&IC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test..... :

Date (s) of performance of tests..... : 07 Nov. 2017~11 Nov. 2017

Date of Issue..... : 11 Nov. 2017

Test Result..... : **Pass**

Testing Engineer :

(Sean she)

Technical Manager :

(Hakim.hou)

Authorized Signatory :

(Vita Li)





Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	12
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
3 . EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 RADIATED EMISSION AND (BANDEGE) MEASUREMENT	18
4. CONDUCTED SPURIOUS EMISSIONS AND BANDEGE	29
4.1 APPLIED PROCEDURES / LIMIT	29
4.2 TEST PROCEDURE	29
4.3 DEVIATION FROM STANDARD	29
4.4 TEST SETUP	30
4.5 EUT OPERATION CONDITIONS	30
4.6 TEST RESULTS	30
5. POWER SPECTRAL DENSITY TEST	44
5.1 APPLIED PROCEDURES / LIMIT	44
5.2 TEST PROCEDURE	44
5.3 DEVIATION FROM STANDARD	45
5.4 TEST SETUP	45
5.5 EUT OPERATION CONDITIONS	45
5.6 TEST RESULTS	45
6. BANDWIDTH MEASUREMENT	53
6.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT	53
6.2 TEST PROCEDURE	53
6.3 DEVIATION FROM STANDARD	53
6.4 TEST SETUP	53
6.5 EUT OPERATION CONDITIONS	53
6.6 TEST RESULTS	54
7. OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT	62



Table of Contents	Page
7.1 TEST PROCEDURE	62
7.2 DEVIATION FROM STANDARD	62
7.3 TEST SETUP	62
7.4 EUT OPERATION CONDITIONS	62
7.5 TEST RESULTS	62
8. MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT	71
8.1 TEST PROCEDURE	71
8.2 DEVIATION FROM STANDARD	71
8.3 TEST SETUP	71
8.4 EUT OPERATION CONDITIONS	71
8.5 TEST RESULTS	71
9. MAXIMUM CONDUCTED OUTPUT POWER	80
9.2 TEST PROCEDURE	80
9.3 DEVIATION FROM STANDARD	80
9.4 TEST SETUP	80
9.5 EUT OPERATION CONDITIONS	80
9.6 TEST RESULTS	81
10. FREQUENCY STABILITY MEASUREMENT	82
10.1 LIMIT OF FREQUENCY STABILITY	82
10.2 MEASURING INSTRUMENTS	82
10.3 TEST PROCEDURES	82
10.4 TEST SETUP	82
10.5 TEST RESULTS	83
11. AUTOMATICALLY DISCONTINUE TRANSMISSION	84
11.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	84
11.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	84
12. ANTENNA REQUIREMENT	85
12.1 STANDARD REQUIREMENT	85
112 EUT ANTENNA	85
APPENDIX - PHOTOS OF TEST SETUP	86

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	11 Nov. 2017	STS1711083W01	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

§ 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v01r03

FCC Part 15.407		
FCC standard	Test Item	Results
15.207	AC Conducted Emission	PASS
§ 15.407 (2) (26 dB) / § 15.407 (e) (6 dB) / § 15.407 (a) (99%)	26dB/6dB & 99% Bandwidth	PASS
15.407(a) (1).(2).(3).(4).(5)	Maximum Conducted Output Power	PASS
15.407(b) & 15.209	Radiated Emission And (bandedge Emissions) Measurement	PASS
15.407(b)7	Conducted Emission And (bandedge Emissions) Measurement	PASS
15.407(a) (1).(2).(3).(4).(5)	Power Spectral Density	PASS
15.407(g)	Frequency Stability	PASS
15.407(c)	Automatically Discontinue Transmission	PASS
15.203/15.204	Antenna Requirement	PASS

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) all tests are according to ANSI C63.10-2013



1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,

Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

CNAS Registration No.: L7649; FCC Registration No.: 625569

IC Registration No.: 12108A; A2LA Certificate No.: 4338.01;

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	$\pm 2.88\text{dB}$
2	Conducted Emission (150KHz-30MHz)	$\pm 2.67\text{dB}$
3	RF power,conducted	$\pm 0.71\text{dB}$
4	Spurious emissions,conducted	$\pm 0.63\text{dB}$
5	All emissions,radiated(<1G) 30MHz-200MHz	$\pm 3.80\text{dB}$
6	All emissions,radiated(<1G) 200MHz-1000MHz	$\pm 3.97\text{dB}$
7	All emissions,radiated(>1G)	$\pm 3.03\text{dB}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name	NextD Smart TV Player	
Trade Name	NextD	
Model Name	N2	
Series Model	N2S, N2C	
Model Difference	All the models are the same circuit and RF module, except the model names and outlook color.	
Product Description	The EUT is a NextD Smart TV Player	
	Operation Frequency:	IEEE 802.11a/ n/ac(HT20)5.745GHz-5.825GHz IEEE 802.11a/ n/ac(HT40)5.755GHz-5.795GHz IEEE 802.11ac(HT80) 5.775GHz
	Modulation Type:	IEEE for 802.11a/n/ac: OFDM(BPSK/QPSK/16QAM)
	Antenna Designation:	See Note 3
	Max.Output Power(Conducted):	8.51dBm
	The duty cycle of WLAN 802.11a/n/ac were 98 %	
	More details of EUT technical specification, please refer to the User's Manual.	
Test Channel	Please refer to the Note 2.	
Adapter	DC 12V	
Hardware version number	N/A	
Software version number	N/A	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



1. 5.745GHz-5.825GHz			
Channel	Frequency	Channel	Frequency
149	5745	159	5795
151	5755	161	5805
153	5765	165	5825
157	5785		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

5GHz:

For 802.11a/n/ac (HT20)	
Channel	Freq.(MHz)
149	5745
157	5785
165	5825

For 802.11n/ac (HT40)	
Channel	Freq.(MHz)
151	5755
159	5795

For 802.11ac (HT80)	
Channel	Freq.(MHz)
155	5775

Ant	Brand	Model Name	Ant Type	Connector	Gain (dBi)	NOTE
A	NextD	N2	FPC Ant	N/A	0dBi	WLAN Ant



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11a HT20 CH149&CH157&CH165	6 Mbps
Mode 2	TX IEEE 802.11n HT20 CH149&CH157&CH165	MCS 0
Mode 3	TX IEEE 802.11ac HT20 CH149&CH157&CH165	NSS1 MCS0
Mode 4	TX IEEE 802.11n HT40 CH151&CH159	MCS 0
Mode 5	TX IEEE 802.11ac HT40 CH151&CH159	NSS1 MCS0
Mode 6	TX IEEE 802.11ac HT80 CH155	NSS1 MCS0


- Note: (1) The measurements are performed at the highest, middle, lowest available channels.
(2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
(3) We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation.

AC Conducted Emission


Test Case	
AC Conducted Emission	Mode 7: Keeping TX + WLAN Link

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Emission Test

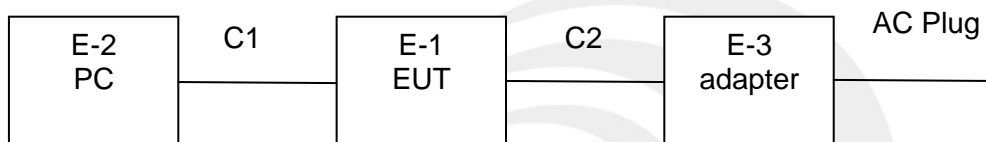



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-2	PC	HP	500-320cx		N/A
E-3	adapter	LITEON	PA-1650-86		N/A

Item	Shielded Type	Ferrite Core	Length	Note
C1	AC (PC Cable) (FTP)	NO	120cm	N/A
C2	HDMI	NO	120cm	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESW	101535	2017.06.01	2018.05.31
Bilog Antenna	TESEQ	CBL6111D	34678	2017.03.24	2018.03.23
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1343	2017.03.06	2018.03.05
Horn Antenna	Schwarzbeck	BBHA 9170	9170-0741	2016.03.06	2019.03.03
PreAmplifier	Agilent	8449B	60538	2017.10.15	2018.10.14
Operational Manual Passive Loop (9K--30MHz)	ETS	6512	00165355	2017.03.06	2018.03.05
Low frequency cable	EM	R01	N/A	NCR	NCR
High frequency cable	SCHWARZBECK	AK9515H	SN-96286/96287	NCR	NCR

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2017.10.15	2018.10.14
LISN	R&S	ENV216	101242	2017.10.15	2018.10.14
Conduction Cable	EM	C01	N/A	2017.03.12	2018.03.11

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2017.10.15	2018.10.14
Spectrum Analyzer	Agilent	E4407B	MY50140340	2017.03.11	2018.03.10
Signal Analyzer	Agilent	N9020A	MY49100060	2017.03.11	2018.03.10



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

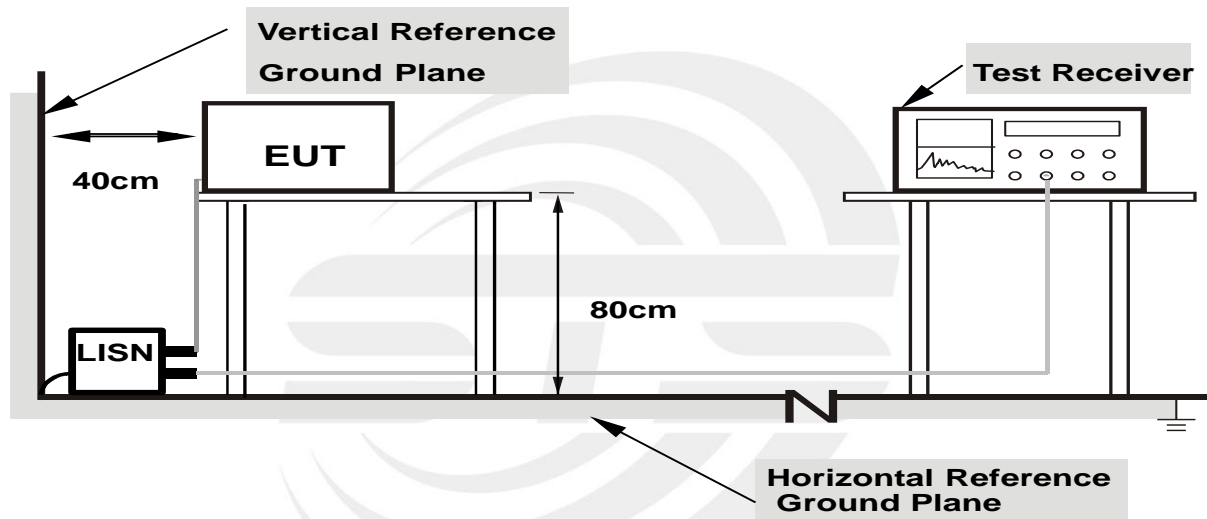

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.6 TEST RESULTS


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 7

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1500	50.85	9.79	60.64	66.00	-5.36	QP
0.1500	32.86	9.79	42.65	56.00	-13.35	AVG
0.2900	31.57	10.18	41.75	60.52	-18.77	QP
0.2900	12.79	10.18	22.97	50.52	-27.55	AVG
0.5020	26.51	10.03	36.54	56.00	-19.46	QP
0.5020	7.85	10.03	17.88	46.00	-28.12	AVG
3.4580	26.23	9.82	36.05	56.00	-19.95	QP
3.4580	8.28	9.82	18.10	46.00	-27.90	AVG
9.1700	32.91	10.12	43.03	60.00	-16.97	QP
9.1700	19.79	10.12	29.91	50.00	-20.09	AVG
15.6660	16.85	10.27	27.12	60.00	-32.88	QP
15.6660	4.86	10.27	15.13	50.00	-34.87	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV

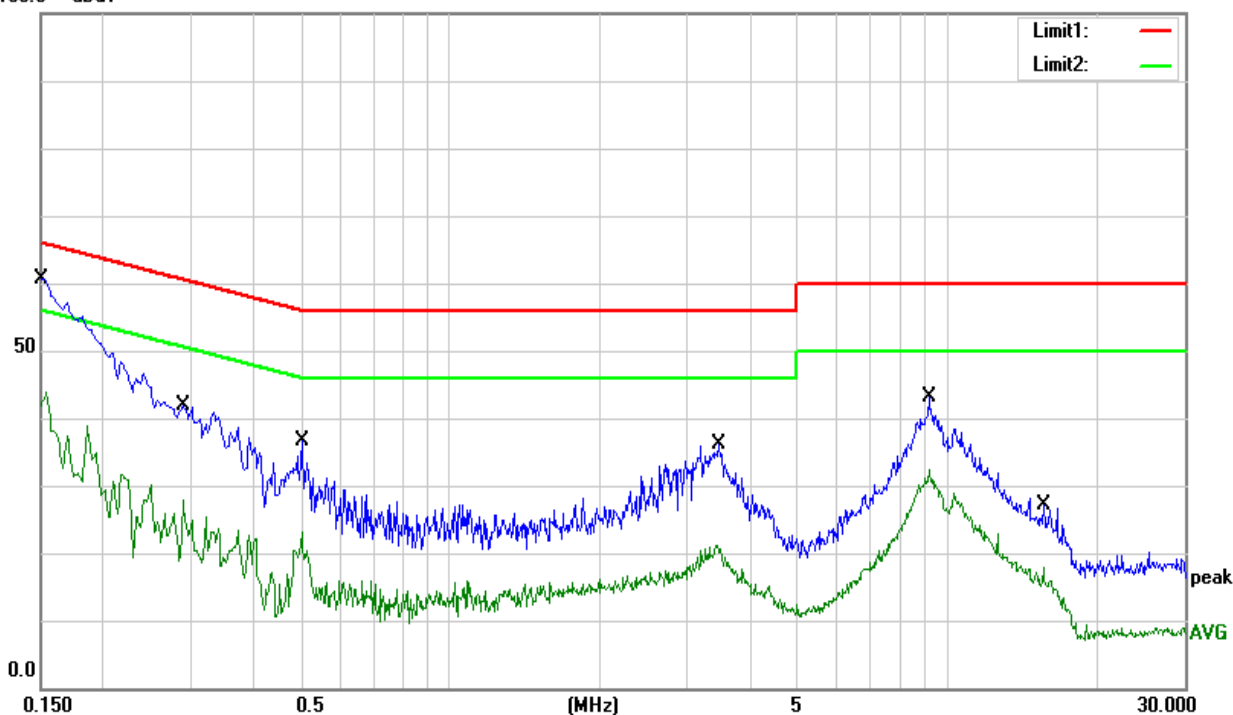




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	N
Test Voltage	AC 120V/60Hz	Test Mode	Mode 7

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1540	50.73	9.76	60.49	65.78	-5.29	QP
0.1540	30.21	9.76	39.97	55.78	-15.81	AVG
0.2540	35.25	10.09	45.34	61.63	-16.29	QP
0.2540	14.35	10.09	24.44	51.63	-27.19	AVG
0.4500	29.33	10.02	39.35	56.88	-17.53	QP
0.4500	5.20	10.02	15.22	46.88	-31.66	AVG
3.3660	25.45	9.92	35.37	56.00	-20.63	QP
3.3660	9.81	9.92	19.73	46.00	-26.27	AVG
9.1820	32.82	9.92	42.74	60.00	-17.26	QP
9.1820	21.45	9.92	31.37	50.00	-18.63	AVG
16.5020	17.92	10.20	28.12	60.00	-31.88	QP
16.5020	5.59	10.20	15.79	50.00	-34.21	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV

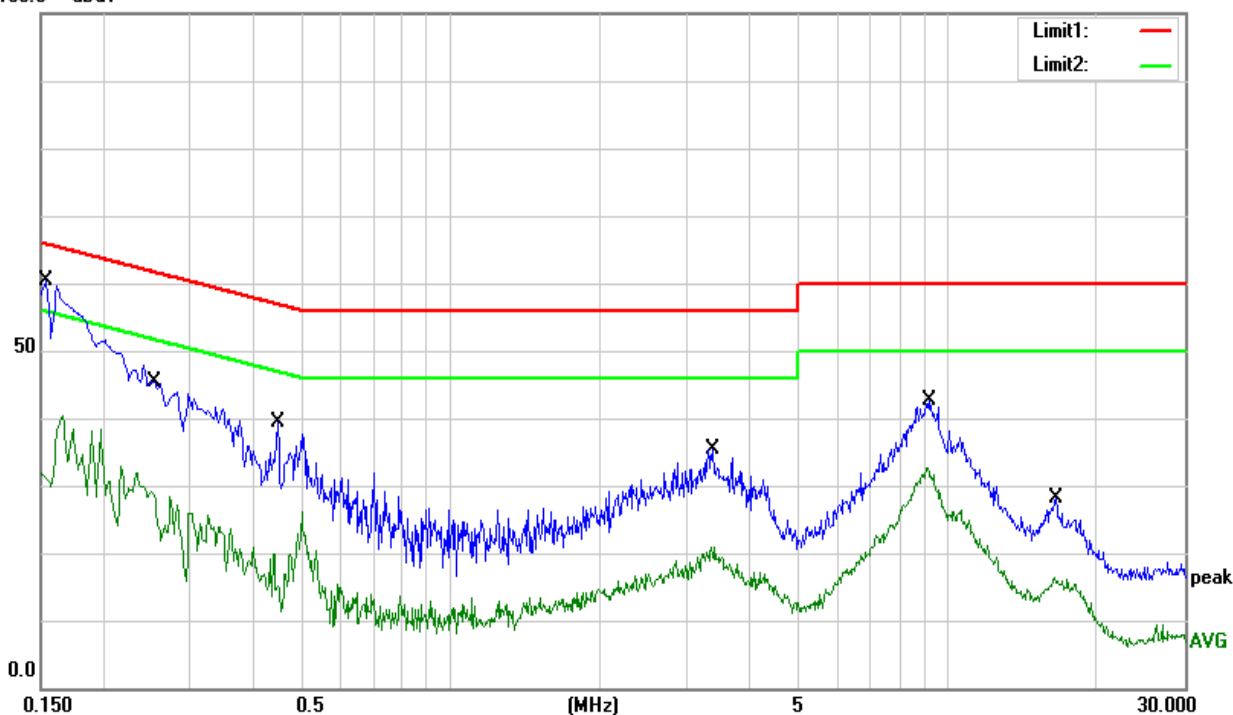



3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.407(b)7& 15.205/209(a), then the (a); limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15E.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters(above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarizations of the antenna are set to make the measurement
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed test to three orthogonal axis. The worst case emissions were reported

3.2.2 DEVIATION FROM TEST STANDARD


No deviation

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

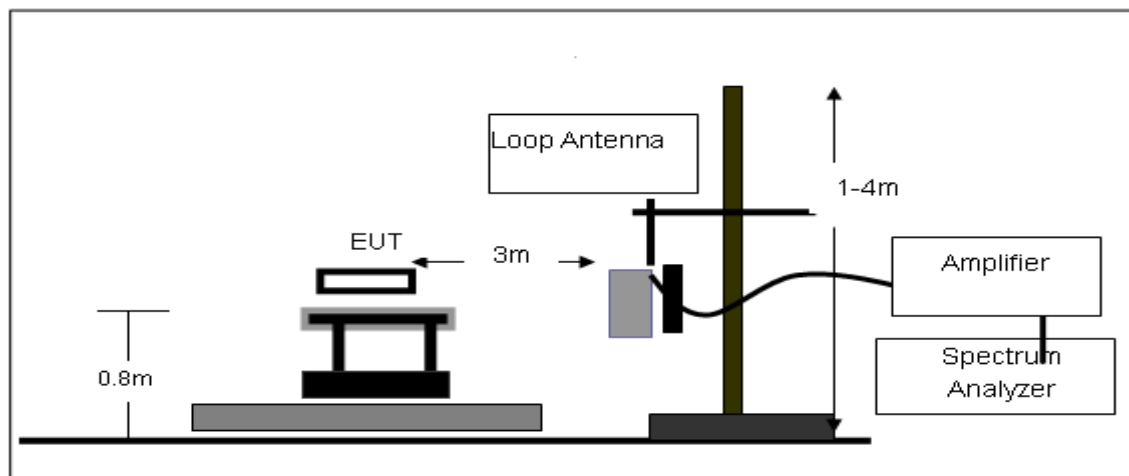

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

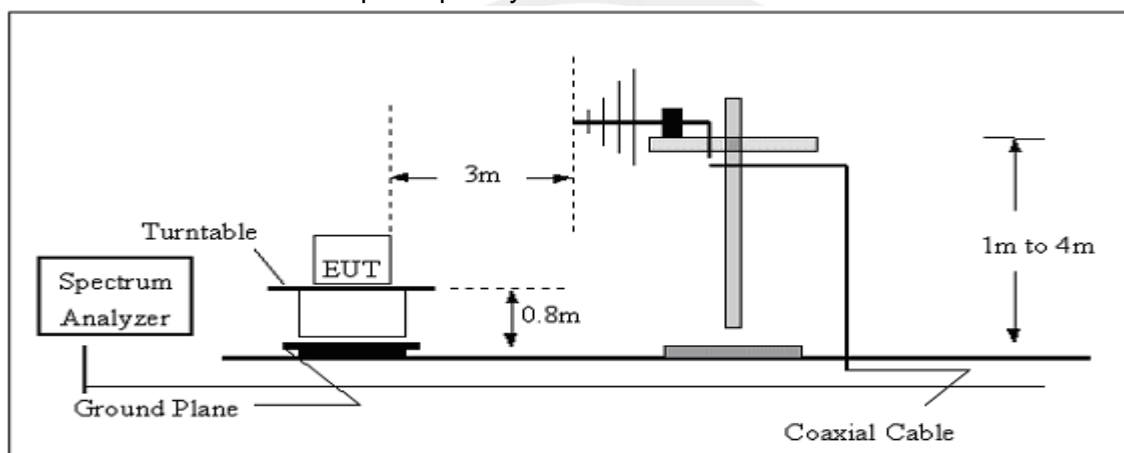

(C) Radiated Emission Test-Up Frequency Above 1GHz

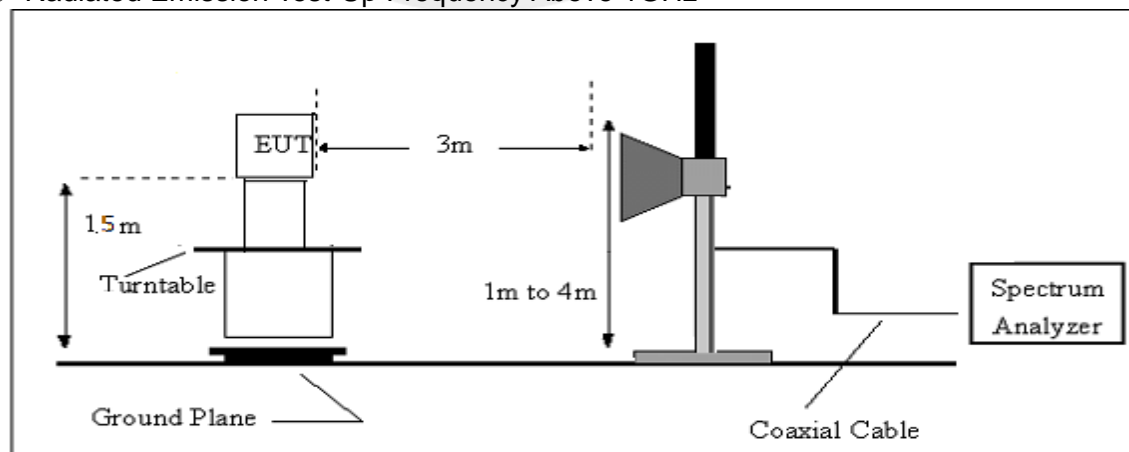



3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$

**3.2.6 TEST RESULTS (Between 9KHz – 30 MHz)**

Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 7.6V from Battery
Test Mode :	TX Mode	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.



3.2.7 TEST RESULTS (Between 30MHz – 1GHz)


Temperature	26 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Voltage	DC 12V from adapter
Test Mode	Mode 1-6(Mode 1-6M worst mode)	Polarization	Horizontal

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
30.5306	27.97	-11.47	16.50	40.00	-23.50	QP
68.8721	36.35	-24.13	12.22	40.00	-27.78	QP
142.3243	37.71	-17.62	20.09	43.50	-23.41	QP
195.1365	39.72	-20.21	19.51	43.50	-23.99	QP
399.0302	30.52	-11.28	19.24	46.00	-26.76	QP
793.3960	31.48	-3.34	28.14	46.00	-17.86	QP

Remark:

1. Margin = Result (Result = Reading + Factor) – Limit

80.0 dBuV/m

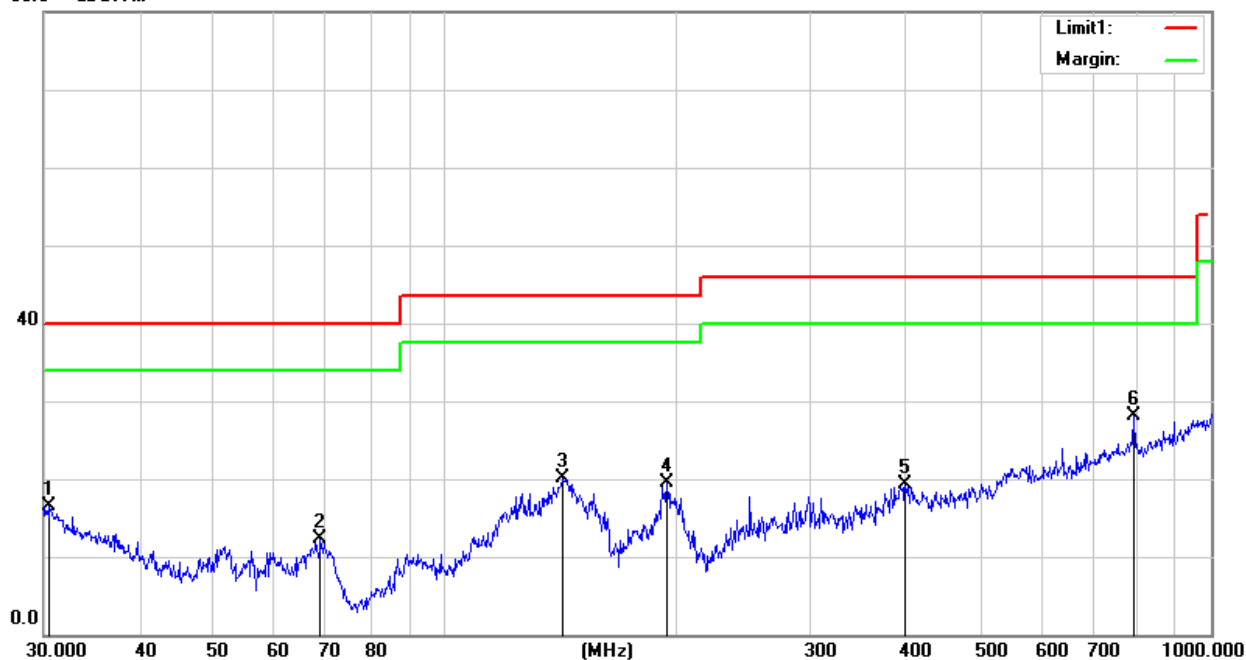




Temperature	26 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Voltage	DC 12V from adapter
Test Mode	Mode 1-6(Mode 1-6M worst mode)	Polarization	Vertical

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
38.3462	41.62	-15.47	26.15	40.00	-13.85	QP
49.8814	40.49	-21.42	19.07	40.00	-20.93	QP
133.1511	38.35	-17.54	20.81	43.50	-22.69	QP
164.9075	38.13	-18.91	19.22	43.50	-24.28	QP
552.8832	41.05	-6.71	34.34	46.00	-11.66	QP
793.3960	34.95	-3.34	31.61	46.00	-14.39	QP

Remark:

1. Margin = Result (Result = Reading + Factor) - Limit

80.0 dBuV/m

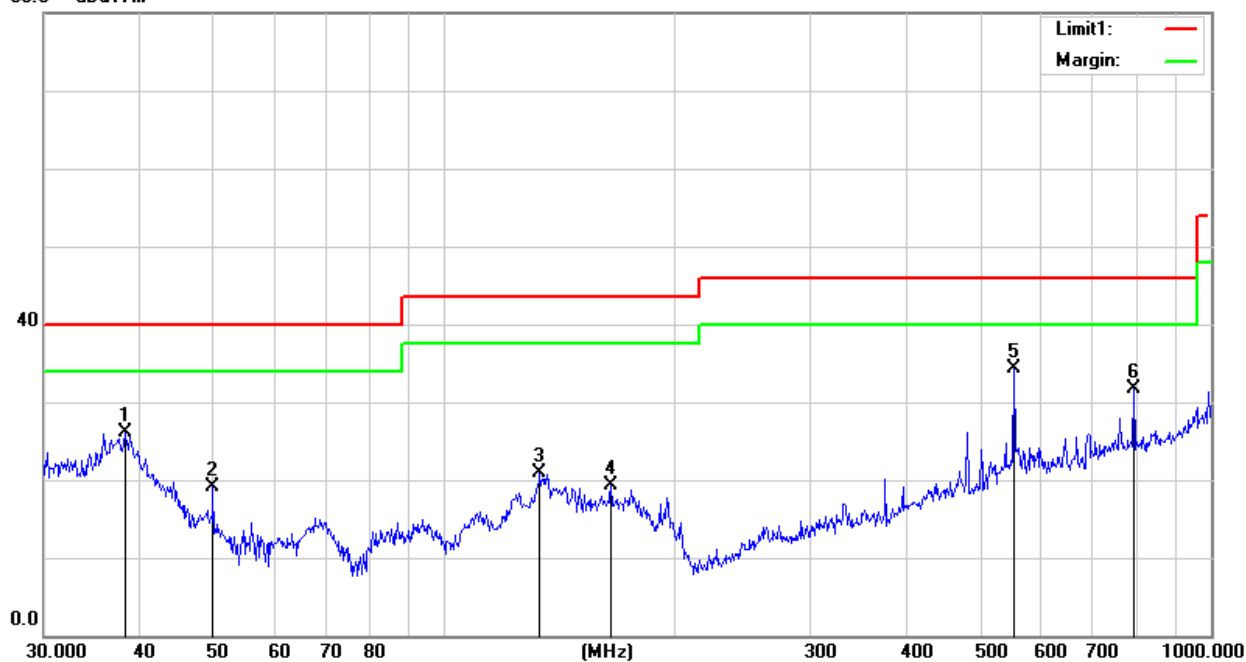

**3.2.8 TEST RESULTS (Above 1000 MHz)**

Band IV(5.725-5.85) GHz										
Frequency (MHz)	Reading	Amplifier	Loss	Antenna Factor	Corrected Factor	Emission Level	Limit (dBuV/m)	Margin	Detector	Comment
	(dBuV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)		(dB)		
Low Channel (802.11 a/ 5745 MHz)										
3251.09	44.44	44.70	6.70	28.20	-9.80	34.64	74.00	-39.36	Pk	Vertical
3251.09	40.85	44.70	6.70	28.20	-9.80	31.05	54.00	-22.95	AV	Vertical
3247.28	44.12	44.70	6.70	28.20	-9.80	34.32	74.00	-39.68	Pk	Horizontal
3247.28	41.97	44.70	6.70	28.20	-9.80	32.17	54.00	-21.83	AV	Horizontal
3990.64	38.78	44.20	7.90	29.70	-6.60	32.18	74.00	-41.82	Pk	Vertical
3990.64	36.52	44.20	7.90	29.70	-6.60	29.92	54.00	-24.08	AV	Vertical
3987.21	38.77	44.20	7.90	29.70	-6.60	32.17	74.00	-41.83	Pk	Horizontal
3987.21	36.58	44.20	7.90	29.70	-6.60	29.98	54.00	-24.02	AV	Horizontal
7233.07	36.76	43.50	11.40	35.50	3.40	40.16	74.00	-33.84	Pk	Vertical
7233.07	33.94	43.50	11.40	35.50	3.40	37.34	54.00	-16.66	AV	Vertical
7221.54	36.88	43.50	11.40	35.50	3.40	40.28	74.00	-33.72	Pk	Horizontal
7221.54	34.30	43.50	11.40	35.50	3.40	37.70	54.00	-16.30	AV	Horizontal
Mid Channel (802.11 a/ 5785 MHz)										
3263.25	44.75	44.70	6.70	28.20	-9.80	34.95	74.00	-39.05	Pk	Vertical
3263.25	40.98	44.70	6.70	28.20	-9.80	31.18	54.00	-22.82	AV	Vertical
3263.85	44.62	44.70	6.70	28.20	-9.80	34.82	74.00	-39.18	Pk	Horizontal
3263.85	42.03	44.70	6.70	28.20	-9.80	32.23	54.00	-21.77	AV	Horizontal
3980.38	40.06	44.20	7.90	29.70	-6.60	33.46	74.00	-40.54	Pk	Vertical
3980.38	36.90	44.20	7.90	29.70	-6.60	30.30	54.00	-23.70	AV	Vertical
3985.30	39.87	44.20	7.90	29.70	-6.60	33.27	74.00	-40.73	Pk	Horizontal
3985.30	36.18	44.20	7.90	29.70	-6.60	29.58	54.00	-24.42	AV	Horizontal
7218.65	37.39	43.50	11.40	35.50	3.40	40.79	74.00	-33.21	Pk	Vertical
7218.65	34.31	43.50	11.40	35.50	3.40	37.71	54.00	-16.29	AV	Vertical
7229.16	37.57	43.50	11.40	35.50	3.40	40.97	74.00	-33.03	Pk	Horizontal
7229.16	34.95	43.50	11.40	35.50	3.40	38.35	54.00	-15.65	AV	Horizontal



Mid Channel (802.11 a/ 5825 MHz)										
3248.71	43.91	44.70	6.70	28.20	-9.80	34.11	74.00	-39.89	Pk	Vertical
3248.71	40.94	44.70	6.70	28.20	-9.80	31.14	54.00	-22.86	AV	Vertical
3257.02	44.24	44.70	6.70	28.20	-9.80	34.44	74.00	-39.56	Pk	Horizontal
3257.02	40.97	44.70	6.70	28.20	-9.80	31.17	54.00	-22.83	AV	Horizontal
3983.43	38.76	44.20	7.90	29.70	-6.60	32.16	74.00	-41.84	Pk	Vertical
3983.43	36.50	44.20	7.90	29.70	-6.60	29.90	54.00	-24.10	AV	Vertical
3993.39	38.78	44.20	7.90	29.70	-6.60	32.18	74.00	-41.82	Pk	Horizontal
3993.39	36.11	44.20	7.90	29.70	-6.60	29.51	54.00	-24.49	AV	Horizontal
7220.13	37.00	43.50	11.40	35.50	3.40	40.40	74.00	-33.60	Pk	Vertical
7220.13	34.60	43.50	11.40	35.50	3.40	38.00	54.00	-16.00	AV	Vertical
7224.82	36.48	43.50	11.40	35.50	3.40	39.88	74.00	-34.12	Pk	Horizontal
7224.82	34.28	43.50	11.40	35.50	3.40	37.68	54.00	-16.32	AV	Horizontal

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (HT-20), 802.11ac (HT-40), 802.11ac (HT-80) the worst case is 802.11a.
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



3.2.9 Band Edge

Band IV(5.725-5.85 GHz)										
Frequency	Reading	Amplifier	Loss	Antenna Factor	Corrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
802.11a BW20MHz										
5725	39.82	44.20	10.00	32.00	-2.20	37.62	74	-36.38	Peak	Vertical
5725	27.53	44.20	10.00	32.00	-2.20	25.33	54	-28.67	AVG	Vertical
5725	39.87	44.20	10.00	32.00	-2.20	37.67	74	-36.33	Peak	Horizontal
5725	29.63	44.20	10.00	32.00	-2.20	27.43	54	-26.57	AVG	Horizontal
5850	46.30	44.20	10.20	32.00	-2.00	44.30	74	-29.70	Peak	Vertical
5850	28.23	44.20	10.20	32.00	-2.00	26.23	54	-27.77	AVG	Vertical
5850	38.57	44.20	10.20	32.00	-2.00	36.57	74	-37.43	Peak	Horizontal
5850	32.03	44.20	10.20	32.00	-2.00	30.03	54	-23.97	AVG	Horizontal
802.11n BW20MHz										
5725	39.10	44.20	10.00	32.00	-2.20	36.90	74	-37.10	Peak	Vertical
5725	27.02	44.20	10.00	32.00	-2.20	24.82	54	-29.18	AVG	Vertical
5725	39.01	44.20	10.00	32.00	-2.20	36.81	74	-37.19	Peak	Horizontal
5725	29.28	44.20	10.00	32.00	-2.20	27.08	54	-26.92	AVG	Horizontal
5850	45.39	44.20	10.20	32.00	-2.00	43.39	74	-30.61	Peak	Vertical
5850	28.03	44.20	10.20	32.00	-2.00	26.03	54	-27.97	AVG	Vertical
5850	38.44	44.20	10.20	32.00	-2.00	36.44	74	-37.56	Peak	Horizontal
5850	32.14	44.20	10.20	32.00	-2.00	30.14	54	-23.86	AVG	Horizontal
802.11n BW40MHz										
5725	39.38	44.20	10.00	32.00	-2.20	37.18	74	-36.82	Peak	Vertical
5725	27.12	44.20	10.00	32.00	-2.20	24.92	54	-29.08	AVG	Vertical
5725	39.85	44.20	10.00	32.00	-2.20	37.65	74	-36.35	Peak	Horizontal
5725	29.20	44.20	10.00	32.00	-2.20	27.00	54	-27.00	AVG	Horizontal
5850	46.01	44.20	10.20	32.00	-2.00	44.01	74	-29.99	Peak	Vertical
5850	27.82	44.20	10.20	32.00	-2.00	25.82	54	-28.18	AVG	Vertical
5850	38.21	44.20	10.20	32.00	-2.00	36.21	74	-37.79	Peak	Horizontal
5850	32.00	44.20	10.20	32.00	-2.00	30.00	54	-24.00	AVG	Horizontal



802.11ac BW20MHz										
5725	39.70	44.20	10.00	32.00	-2.20	37.50	74	-36.50	Peak	Vertical
5725	27.45	44.20	10.00	32.00	-2.20	25.25	54	-28.75	AVG	Vertical
5725	39.42	44.20	10.00	32.00	-2.20	37.22	74	-36.78	Peak	Horizontal
5725	29.31	44.20	10.00	32.00	-2.20	27.11	54	-26.89	AVG	Horizontal
5850	46.01	44.20	10.20	32.00	-2.00	44.01	74	-29.99	Peak	Vertical
5850	28.02	44.20	10.20	32.00	-2.00	26.02	54	-27.98	AVG	Vertical
5850	38.43	44.20	10.20	32.00	-2.00	36.43	74	-37.57	Peak	Horizontal
5850	31.53	44.20	10.20	32.00	-2.00	29.53	54	-24.47	AVG	Horizontal
802.11ac BW40MHz										
5725	39.38	44.20	10.00	32.00	-2.20	37.18	74	-36.82	Peak	Vertical
5725	27.08	44.20	10.00	32.00	-2.20	24.88	54	-29.12	AVG	Vertical
5725	39.39	44.20	10.00	32.00	-2.20	37.19	74	-36.81	Peak	Horizontal
5725	29.51	44.20	10.00	32.00	-2.20	27.31	54	-26.69	AVG	Horizontal
5850	45.96	44.20	10.20	32.00	-2.00	43.96	74	-30.04	Peak	Vertical
5850	27.89	44.20	10.20	32.00	-2.00	25.89	54	-28.11	AVG	Vertical
5850	38.51	44.20	10.20	32.00	-2.00	36.51	74	-37.49	Peak	Horizontal
5850	31.99	44.20	10.20	32.00	-2.00	29.99	54	-24.01	AVG	Horizontal
802.11ac BW80MHz										
5725	39.68	44.20	10.00	32.00	-2.20	37.48	74	-36.52	Peak	Vertical
5725	27.35	44.20	10.00	32.00	-2.20	25.15	54	-28.85	AVG	Vertical
5725	39.64	44.20	10.00	32.00	-2.20	37.44	74	-36.56	Peak	Horizontal
5725	29.43	44.20	10.00	32.00	-2.20	27.23	54	-26.77	AVG	Horizontal
5850	45.94	44.20	10.20	32.00	-2.00	43.94	74	-30.06	Peak	Vertical
5850	27.75	44.20	10.20	32.00	-2.00	25.75	54	-28.25	AVG	Vertical
5850	38.28	44.20	10.20	32.00	-2.00	36.28	74	-37.72	Peak	Horizontal
5850	31.54	44.20	10.20	32.00	-2.00	29.54	54	-24.46	AVG	Horizontal



4. CONDUCTED SPURIOUS EMISSIONS AND BANDEDGE

4.1 APPLIED PROCEDURES / LIMIT

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	1000 KHz/3000 KHz
Trace-Mode:	Max hold


For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 5700 to 5725 MHz Upper Band Edge: 5850 to 5870 MHz
RB / VB (emission in restricted band)	1000 KHz/3000 KHz
Trace-Mode:	Max hold

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP

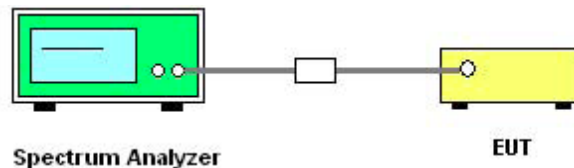

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1000 kHz. In order to make an accurate measurement, set the span greater than RBW.


4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS


The frequency emission of peak points that did not show below the plots are at least 10dB below the limit, the frequency emission is mainly from the environment noise

TX Spurious Emissions 802.11a Mode CH 149

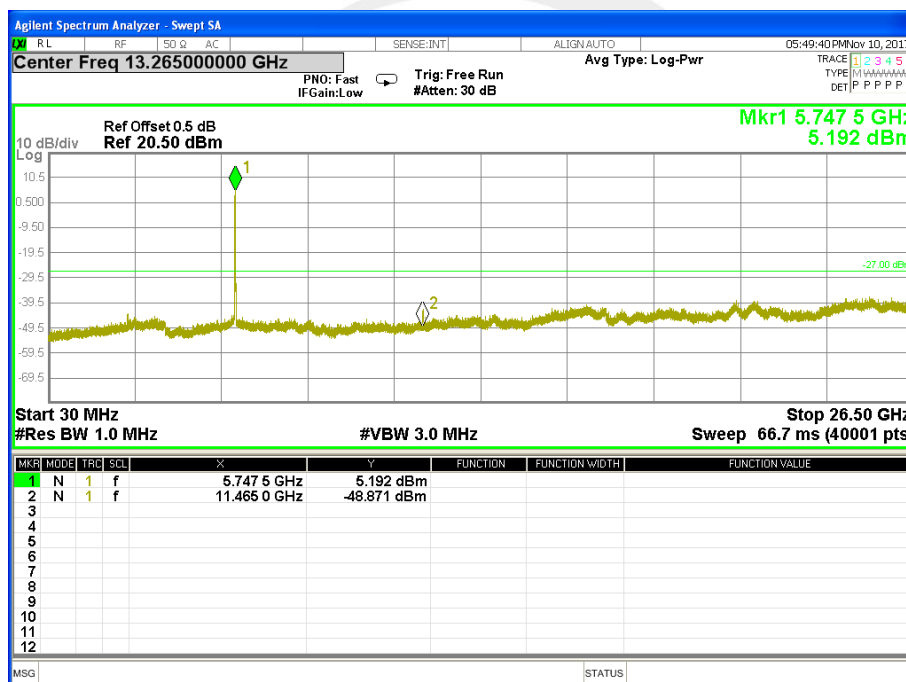




TX Spurious Emissions 802.11a Mode CH 157

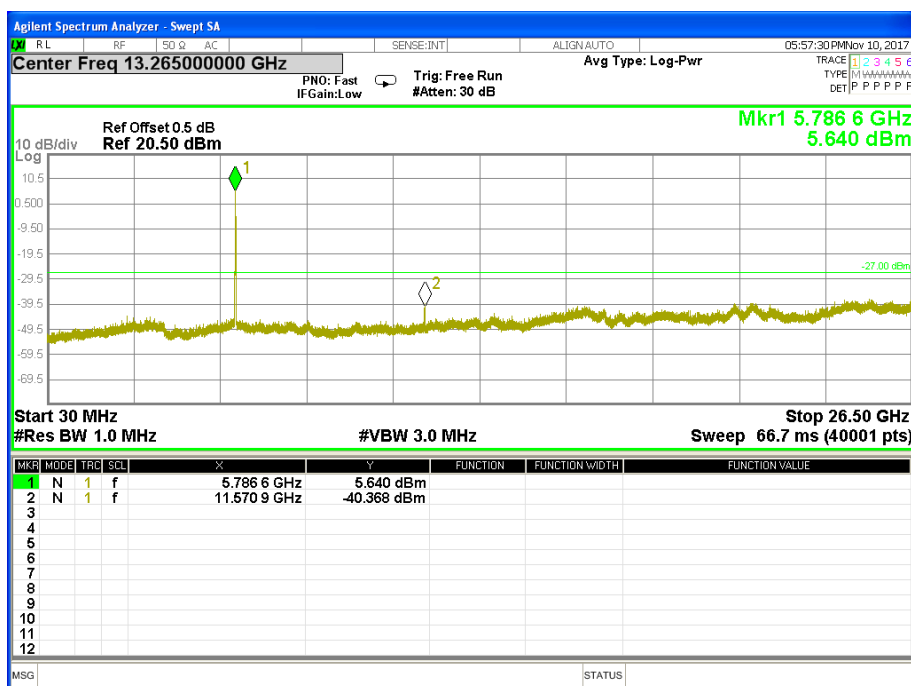


TX Spurious Emissions 802.11a Mode CH 165

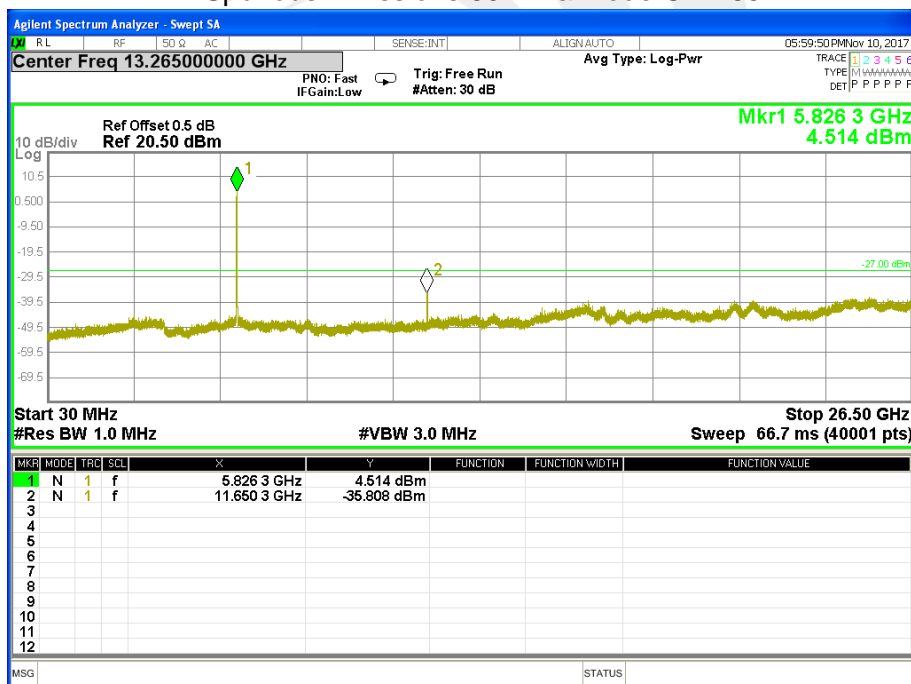




TX Spurious Emissions 802.11n(HT20) Mode CH 149

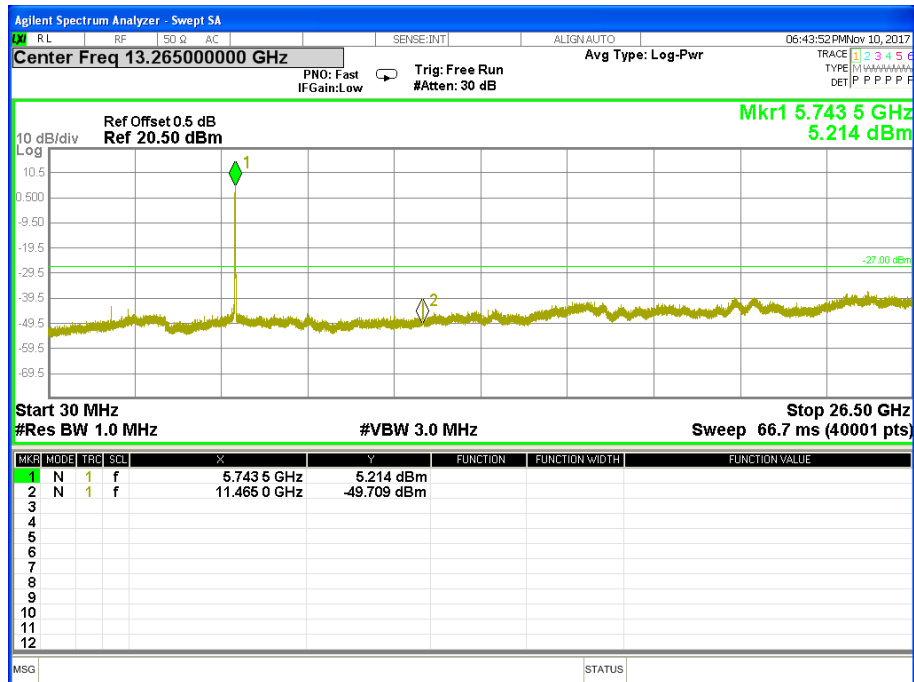


TX Spurious Emissions 802.11n(HT20) Mode CH 157

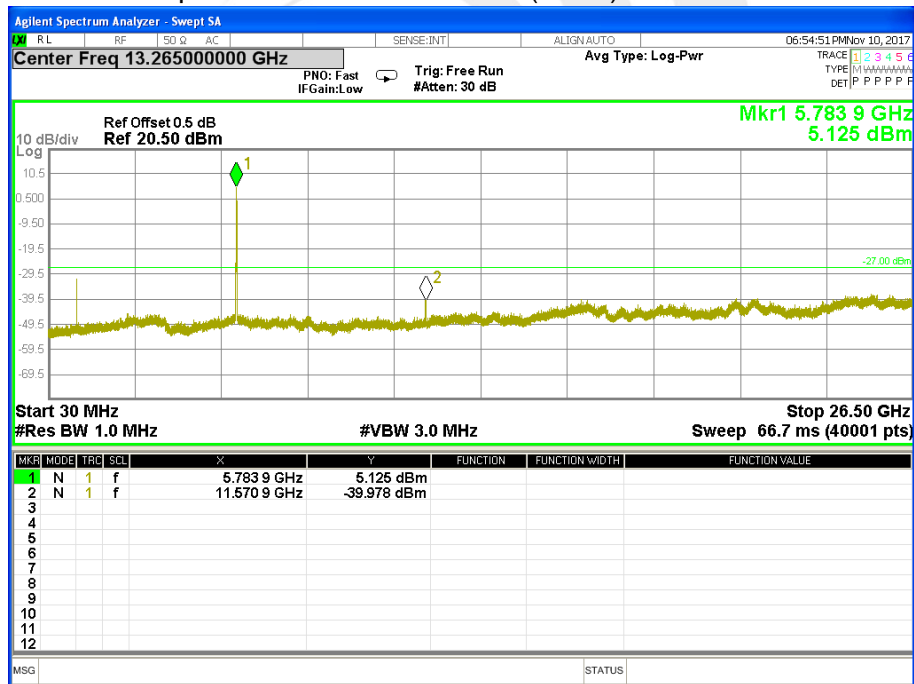




TX Spurious Emissions 802.11n(HT20) Mode CH 165

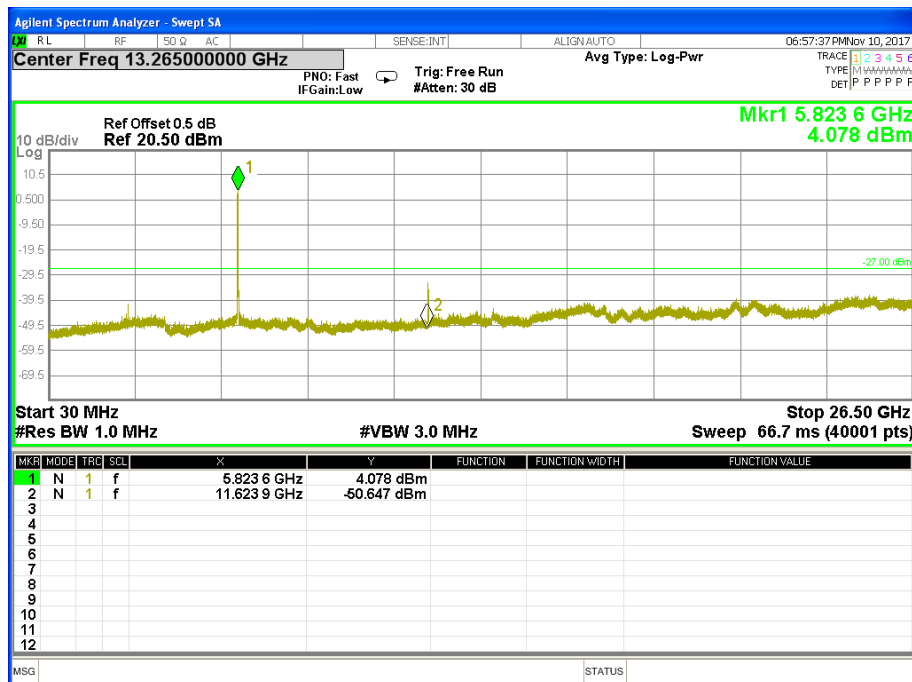


TX Spurious Emissions 802.11n(HT40) Mode CH 151

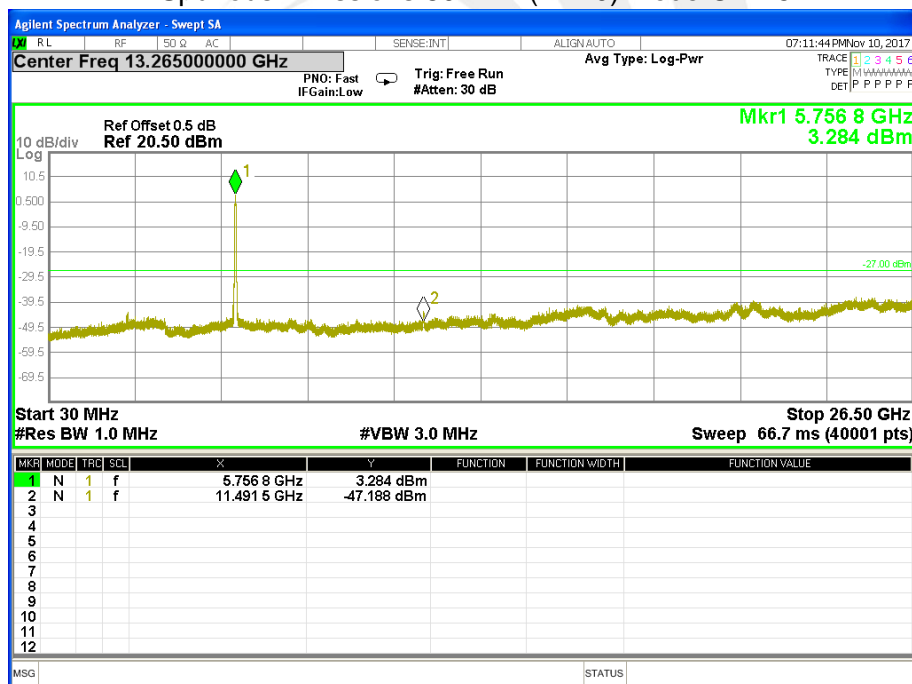




TX Spurious Emissions 802.11n(HT40) Mode CH 159

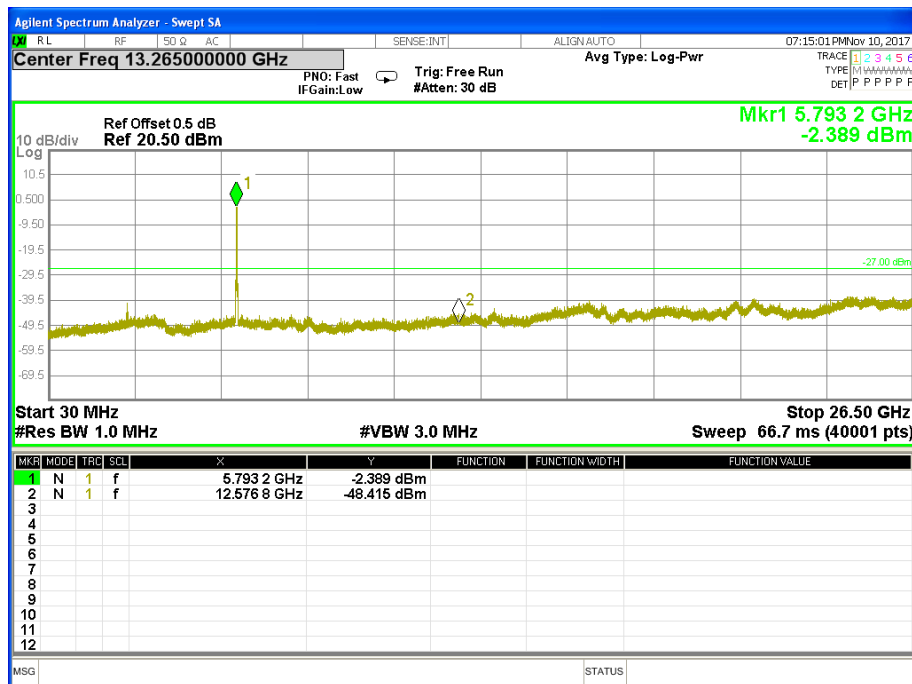


TX Spurious Emissions 802.11ac(HT20) Mode CH 149

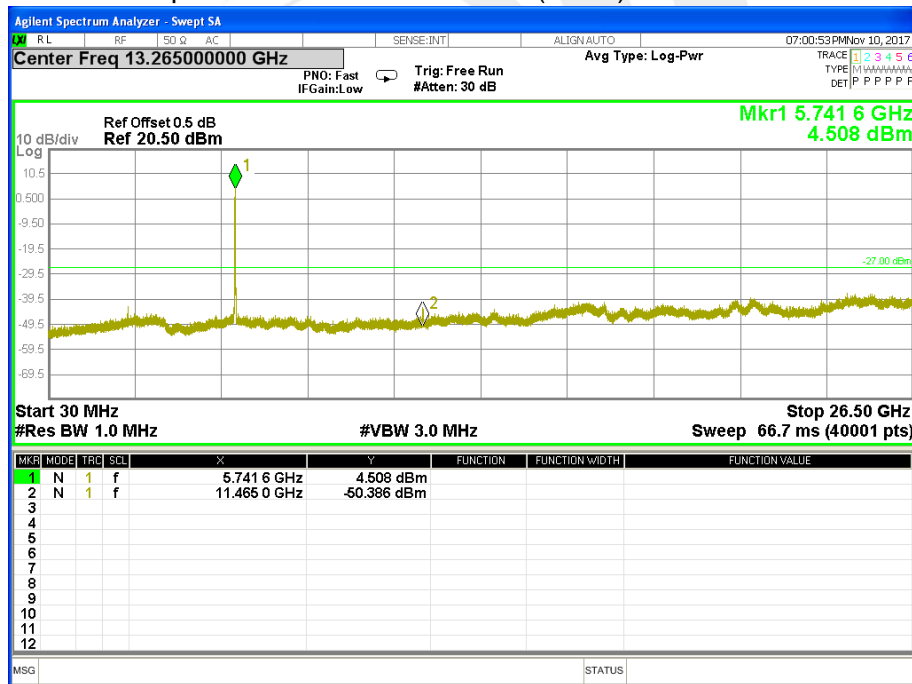




TX Spurious Emissions 802.11ac(HT20) Mode CH 157

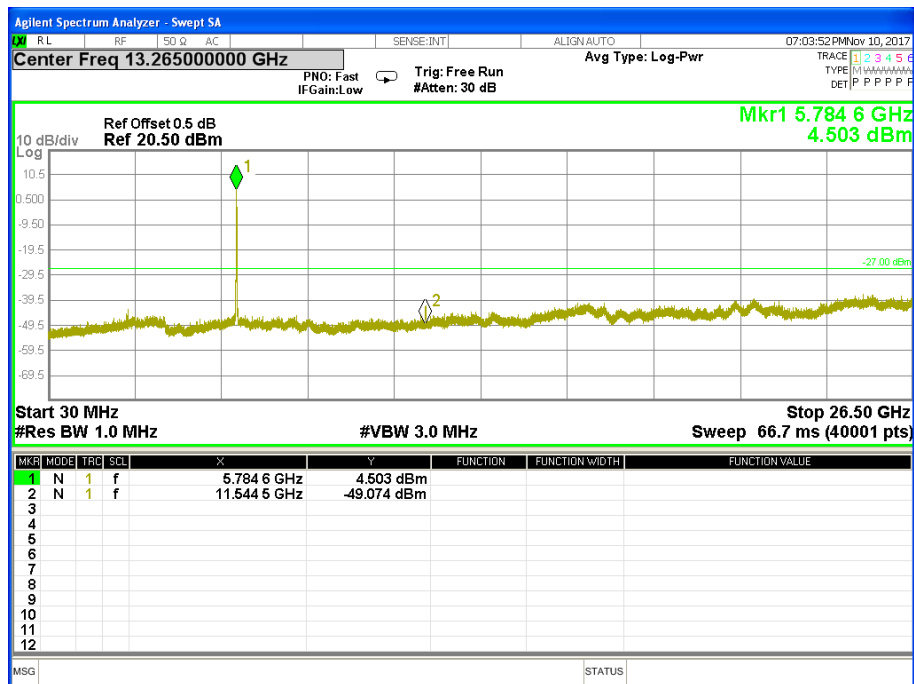


TX Spurious Emissions 802.11ac(HT20) Mode CH 165

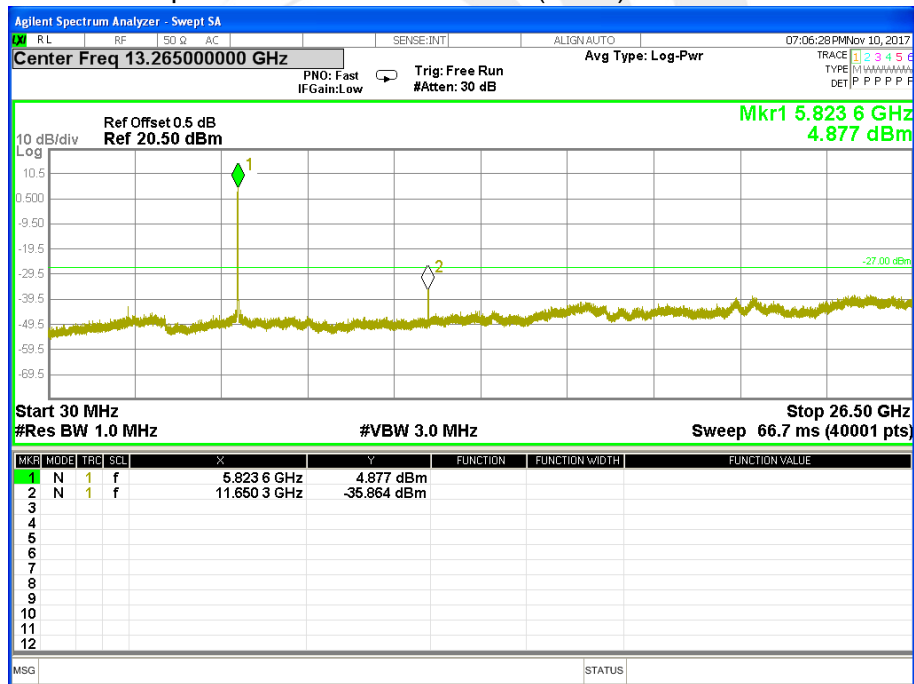




TX Spurious Emissions 802.11ac(HT40) Mode CH 151

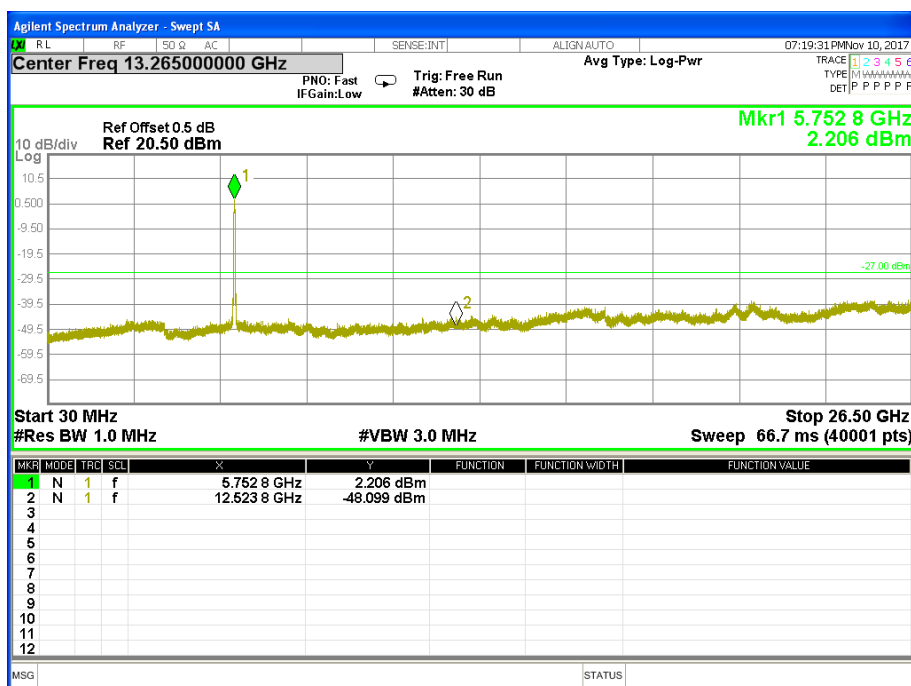


TX Spurious Emissions 802.11ac(HT40) Mode CH 159

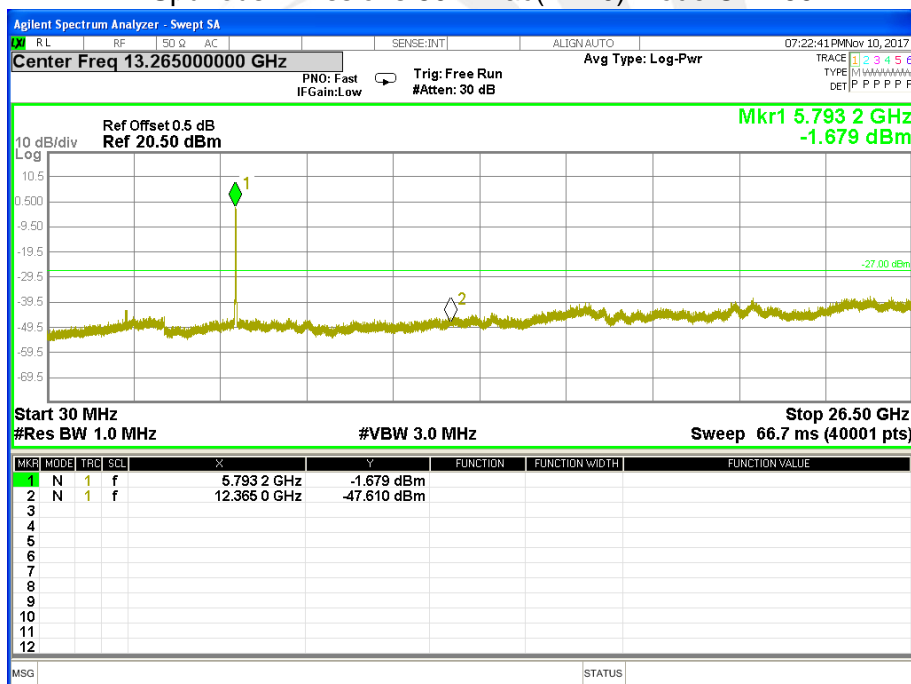




TX Spurious Emissions 802.11ac(HT80) Mode CH 155

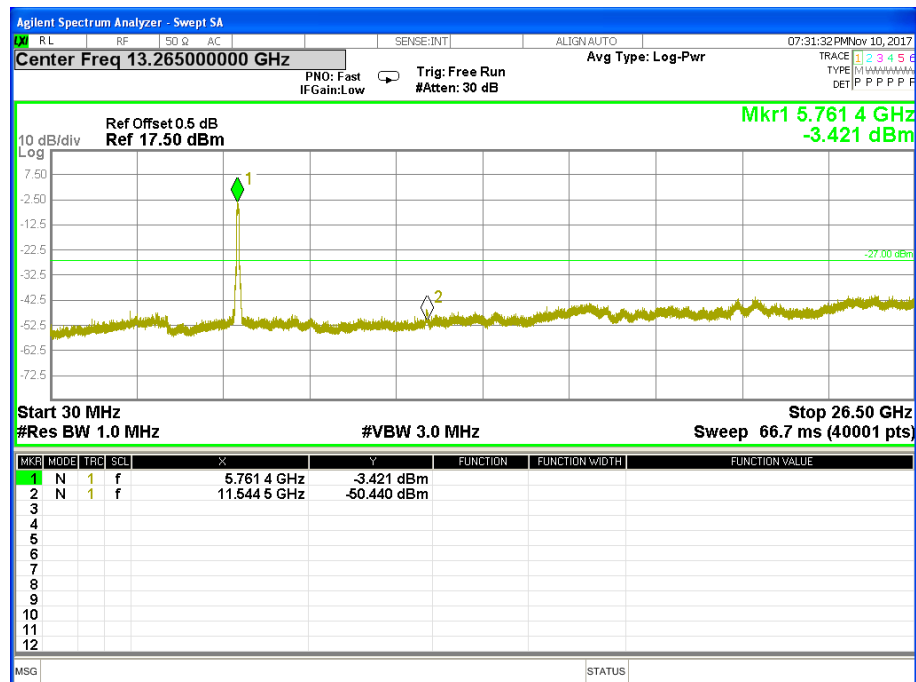




Band edge

TX Band edge 802.11a Mode CH 149

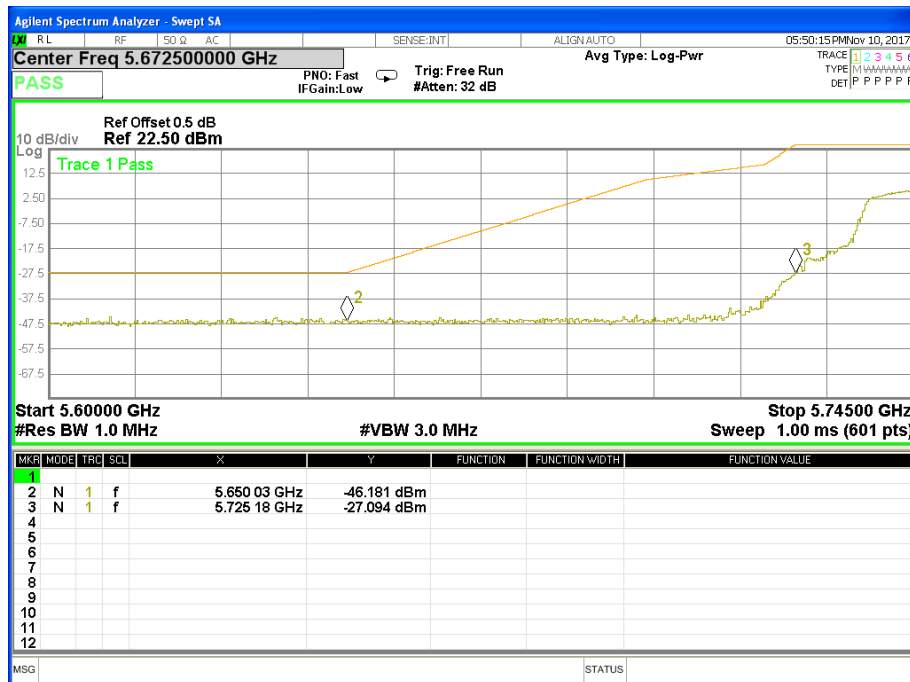

TX Band edge 802.11a Mode CH 165

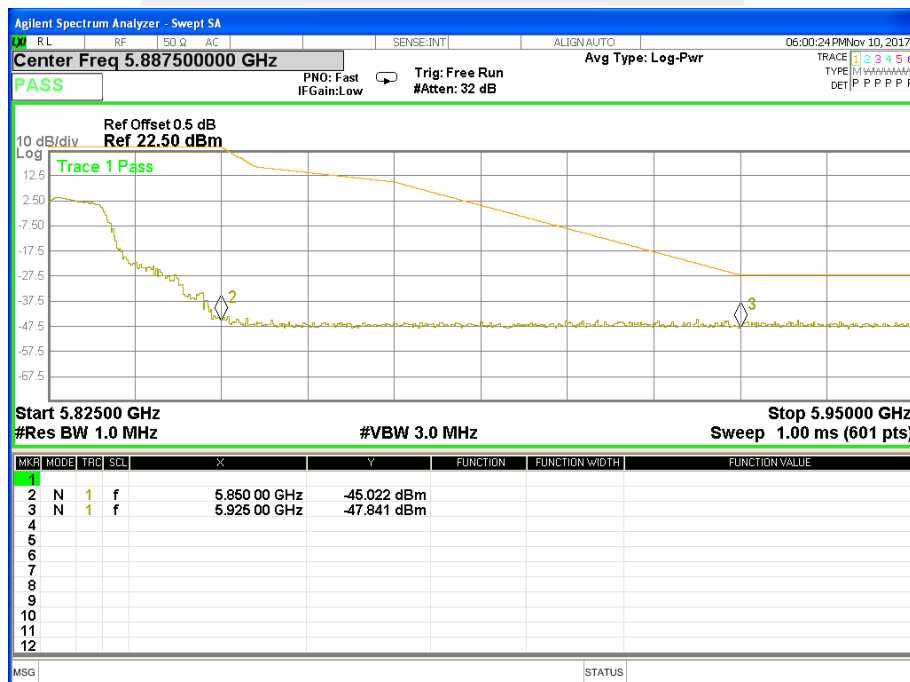




TX Band edge 802.11n(HT20) Mode CH 149




TX Band edge 802.11n(HT20) Mode CH 165

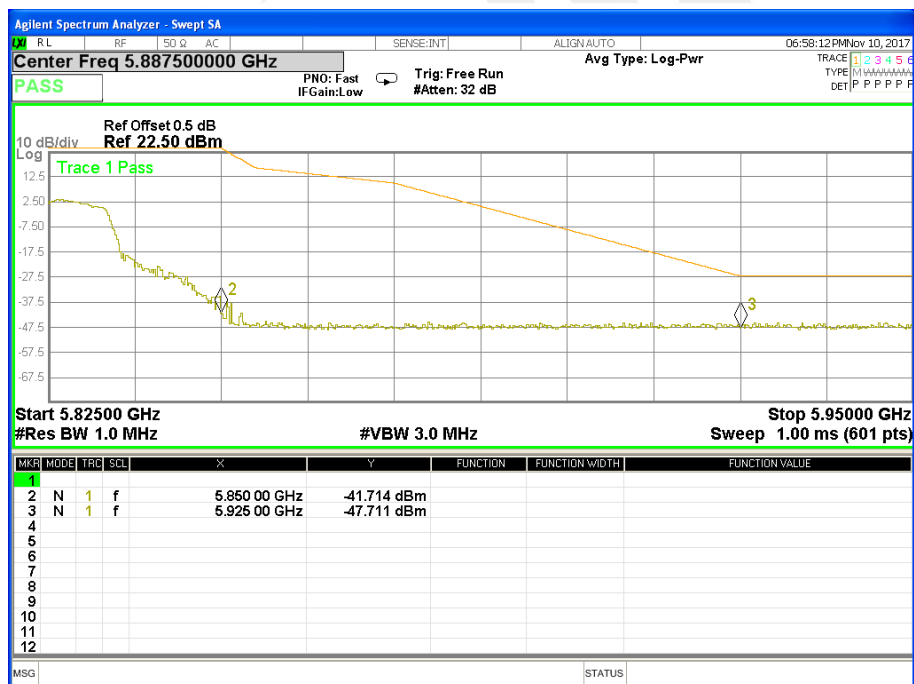




TX Band edge 802.11n(HT40) Mode CH 151

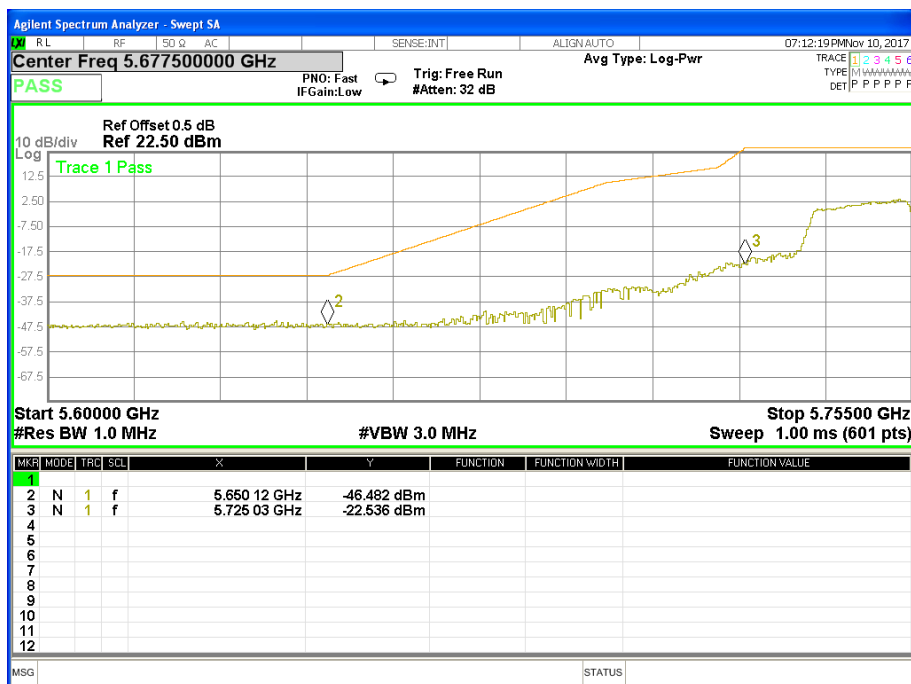


TX Band edge 802.11n(HT40) Mode CH 159

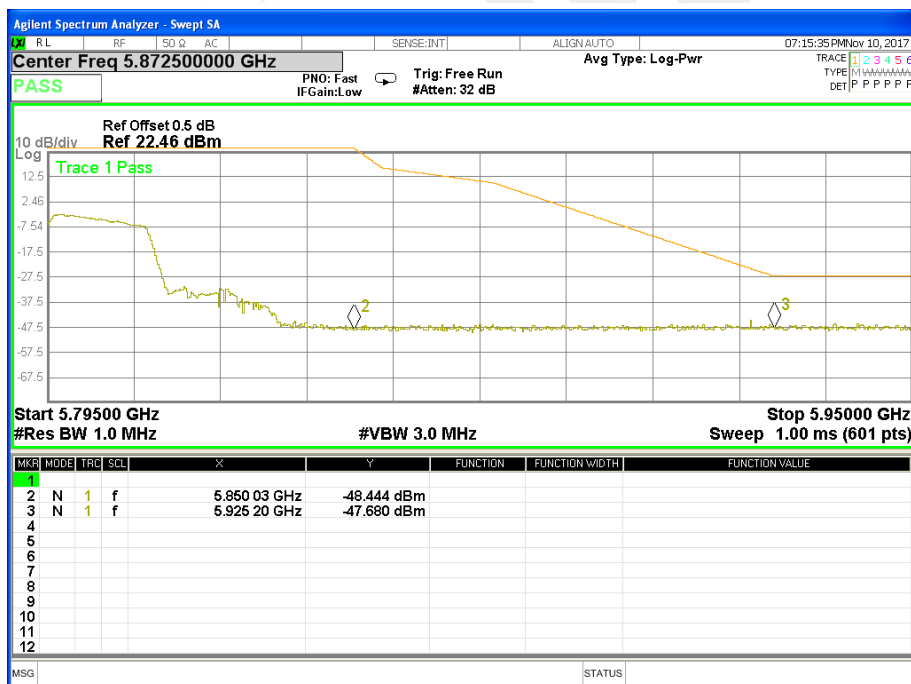




TX Band edge 802.11ac(HT20) Mode CH 149

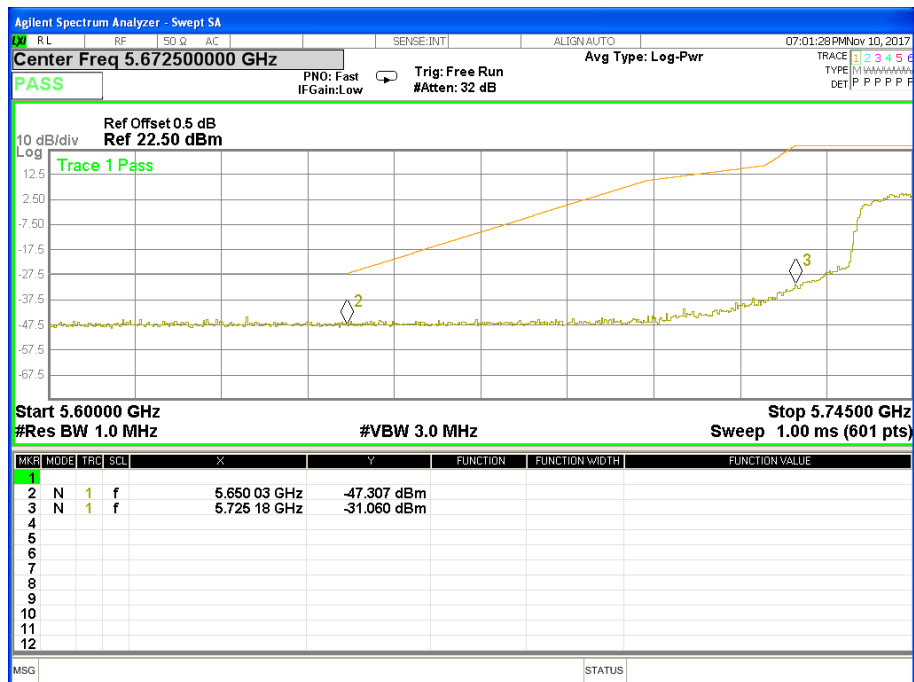


TX Band edge 802.11ac(HT20) Mode CH 165

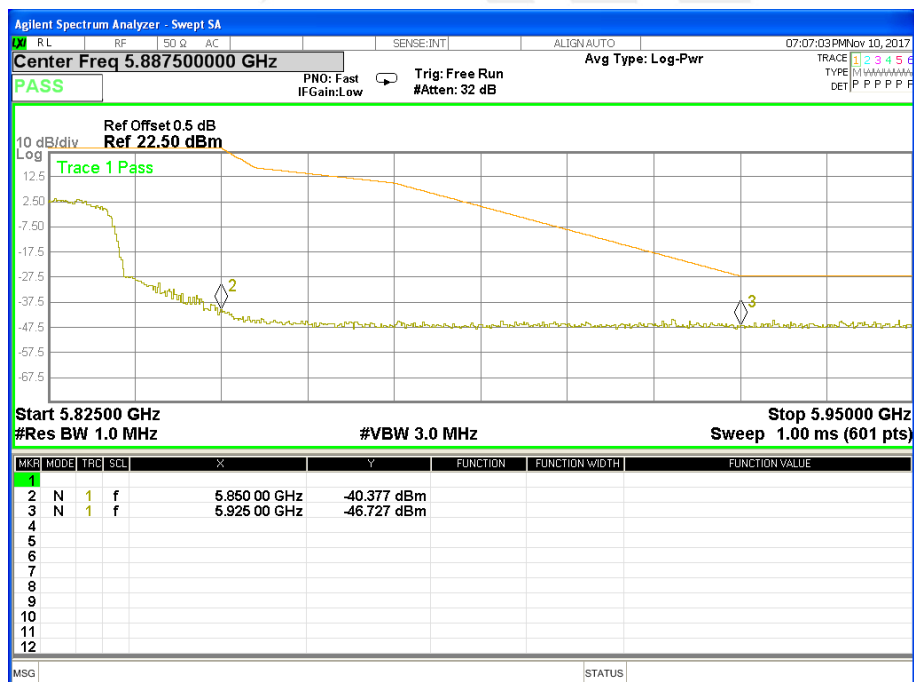




TX Band edge 802.11ac(HT40) Mode CH 151

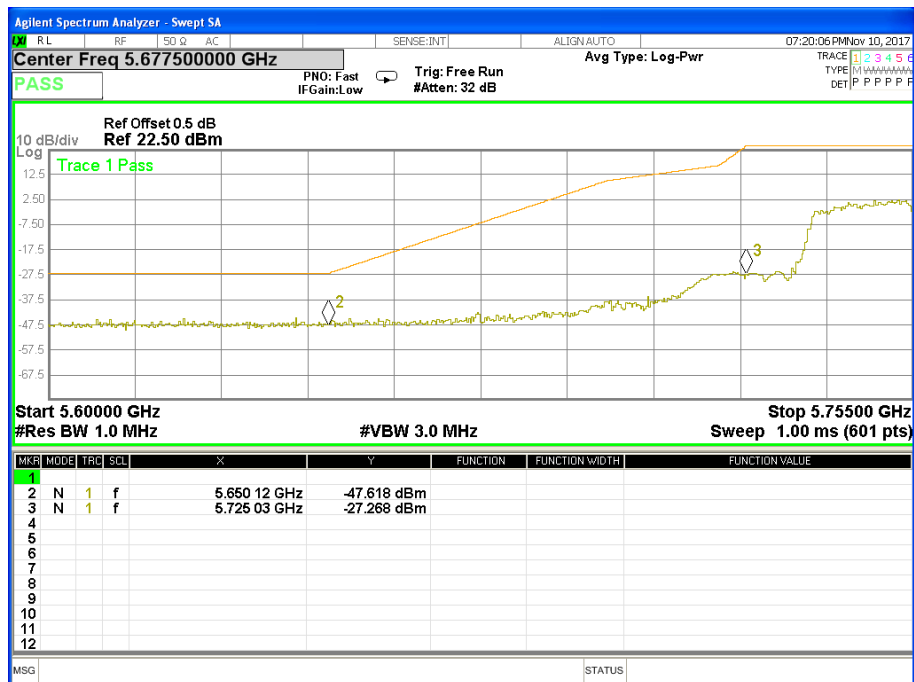


TX Band edge 802.11ac(HT40) Mode CH 159

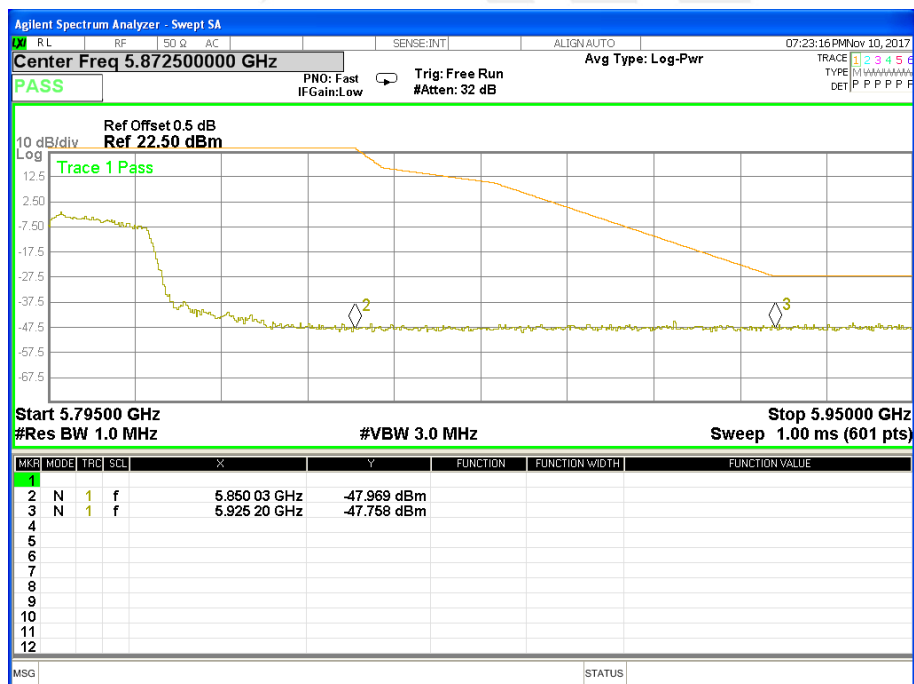




TX Band edge 802.11ac(HT80) CH 155 Left

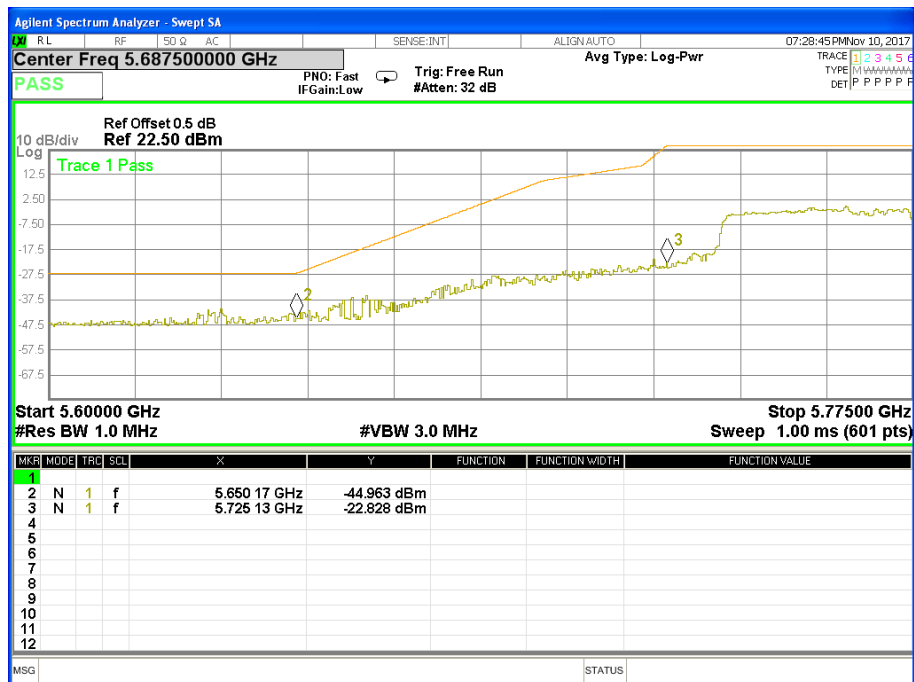

TX Band edge 802.11ac(HT80) CH 155 Right

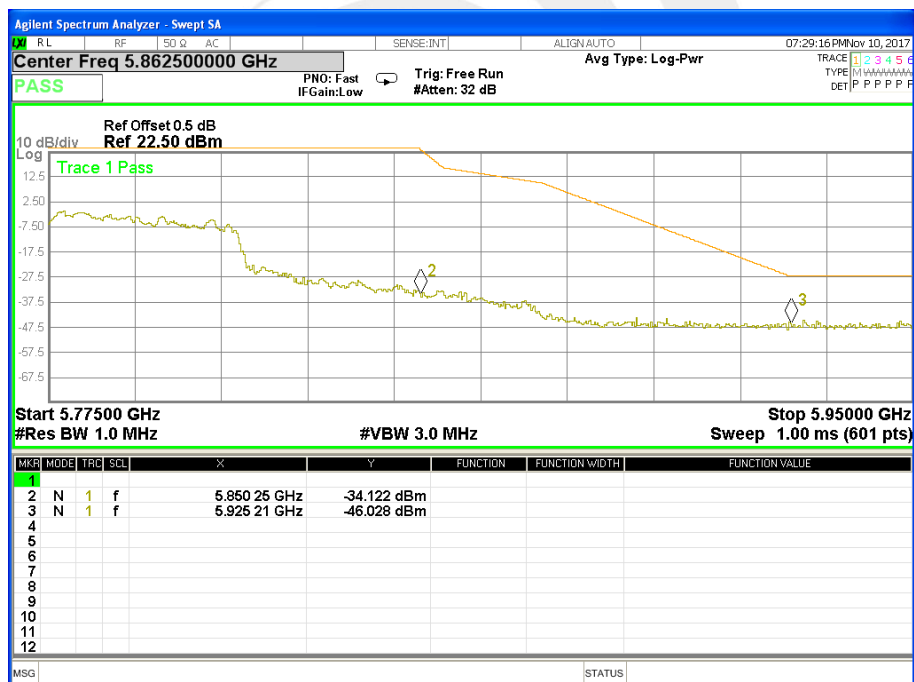



5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

1. For mobile and portable client devices in the 5.15-5.25 GHz band, , the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.850 GHz, the peak power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna directional gain is greater than 6 dBi, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2 TEST PROCEDURE

1. The setting follows Method SA-1 of FCC KDB D02 General UNII Test Procedures New Rules v01r03.

For devices operating in the band, the rules specify a measurement bandwidth of 500 kHz.

Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used.

The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (*i.e.*, 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHZ}$ is available on nearly all spectrum analyzers.



5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS


5725-5850MHz			
Frequency	Power Density Total(dBm)	Limit	Result
802.11a			
5745	2.476	30	PASS
5785	2.290	30	PASS
5825	1.139	30	PASS
802.11n20			
5745	2.320	30	PASS
5785	2.287	30	PASS
5825	1.272	30	PASS
802.11n40			
5755	-0.644	30	PASS
5795	-5.609	30	PASS
802.11ac20			
5745	1.672	30	PASS
5785	2.165	30	PASS
5825	1.680	30	PASS
802.11ac40			
5755	-0.600	30	PASS
5795	-4.737	30	PASS
802.11ac80			
5775	-3.484	30	PASS



PSD 802.11a Channel 149

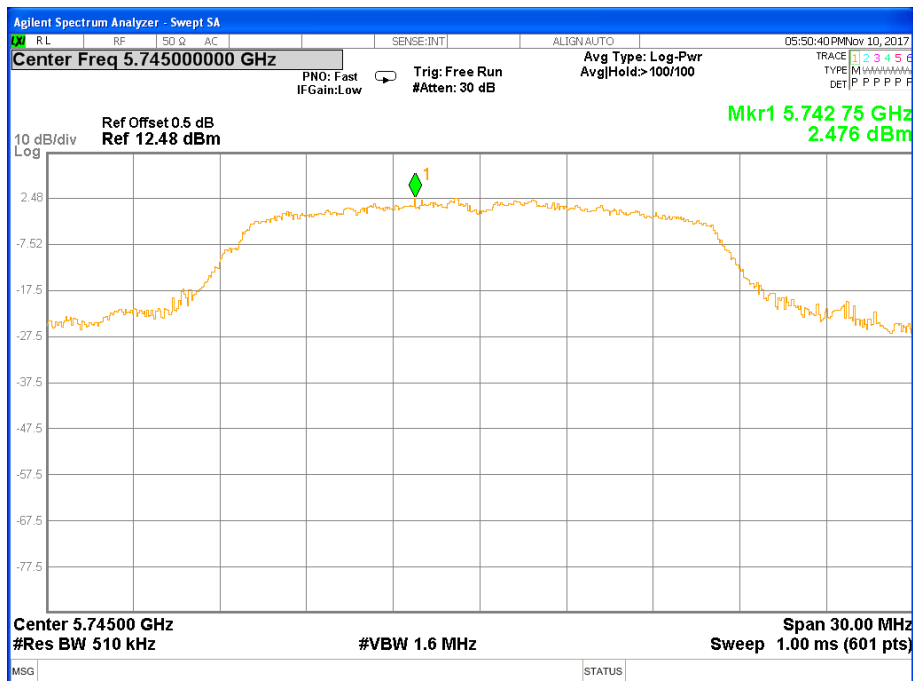


PSD 802.11a Channel 157

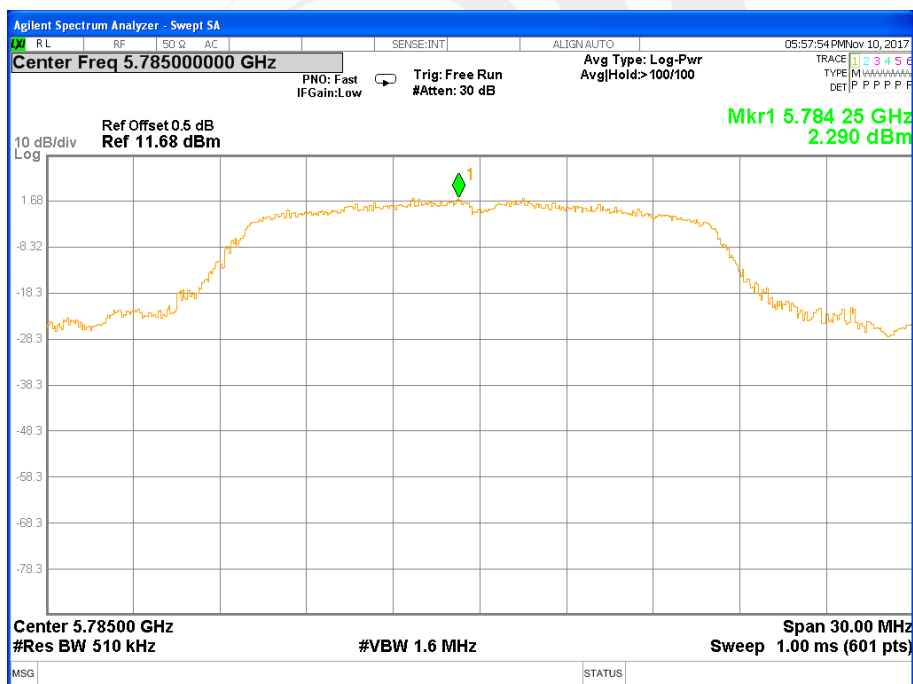




PSD 802.11a Channel 165

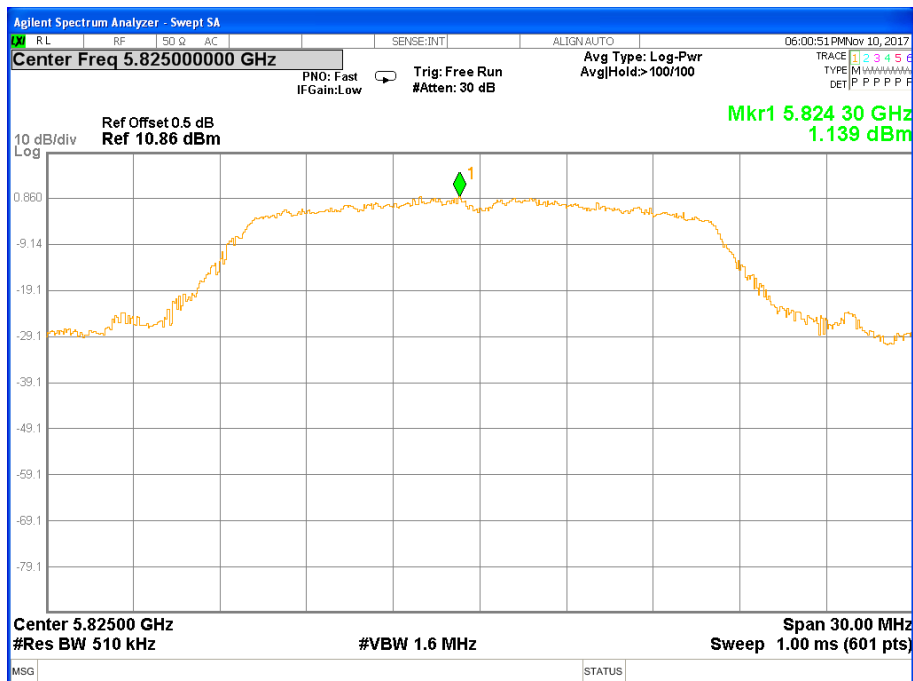


PSD 802.11n(HT20) Channel 149

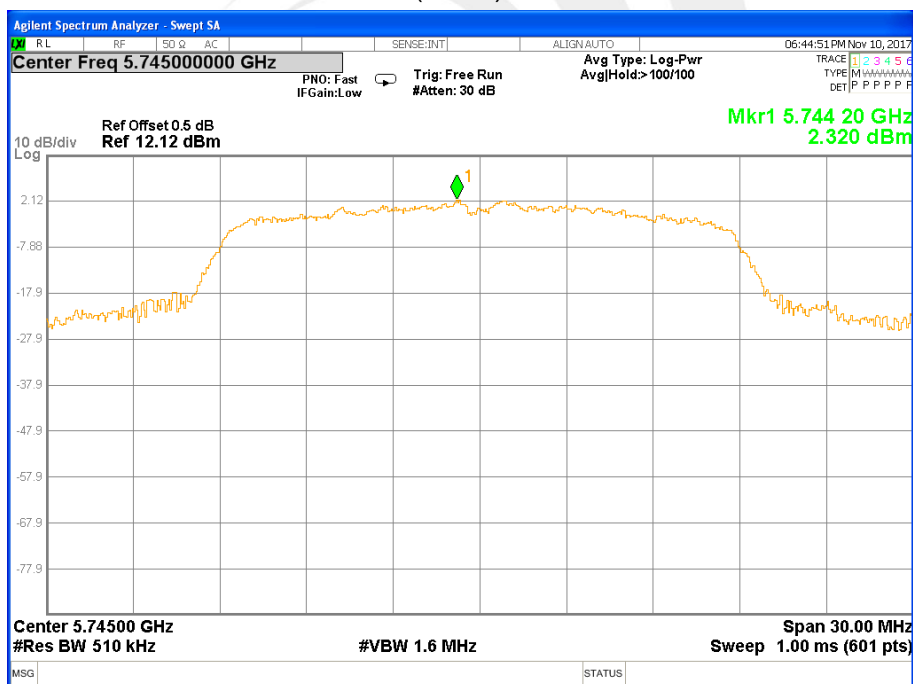




PSD 802.11n(HT20) Channel 157

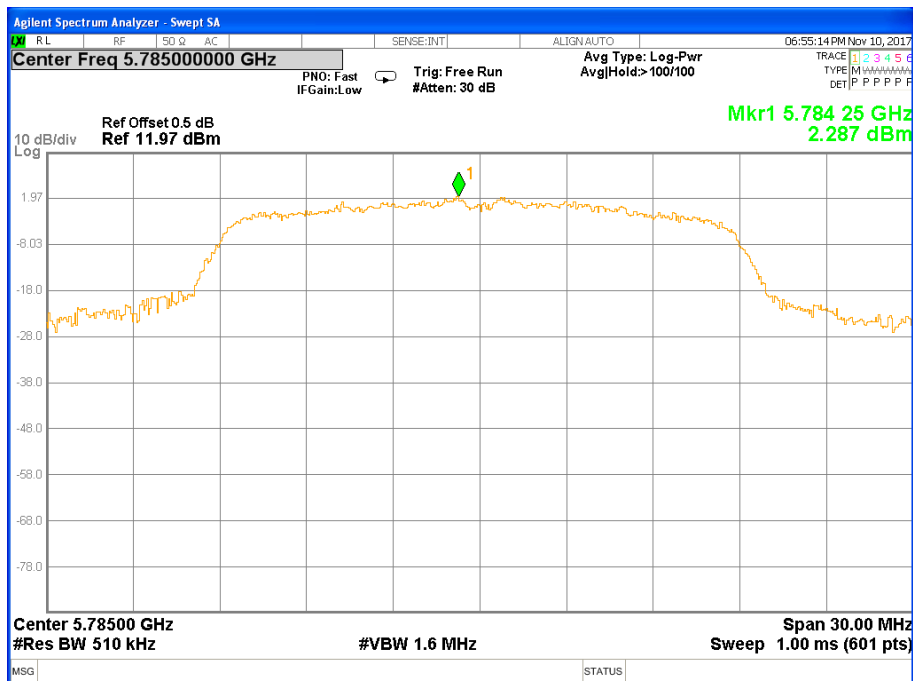


PSD 802.11n(HT20) Channel 165

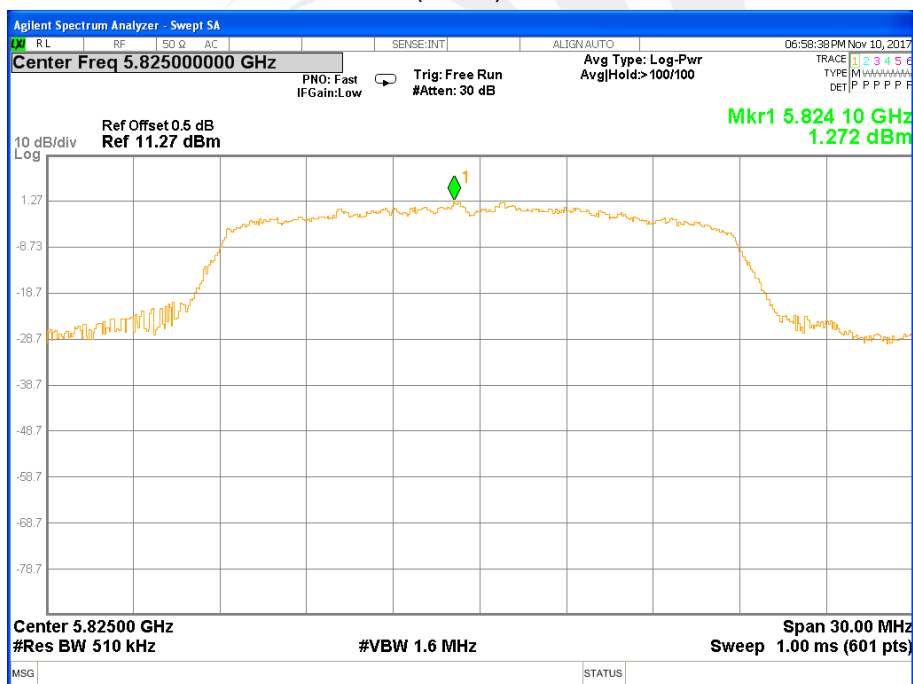




PSD 802.11n(HT40) Channel 151

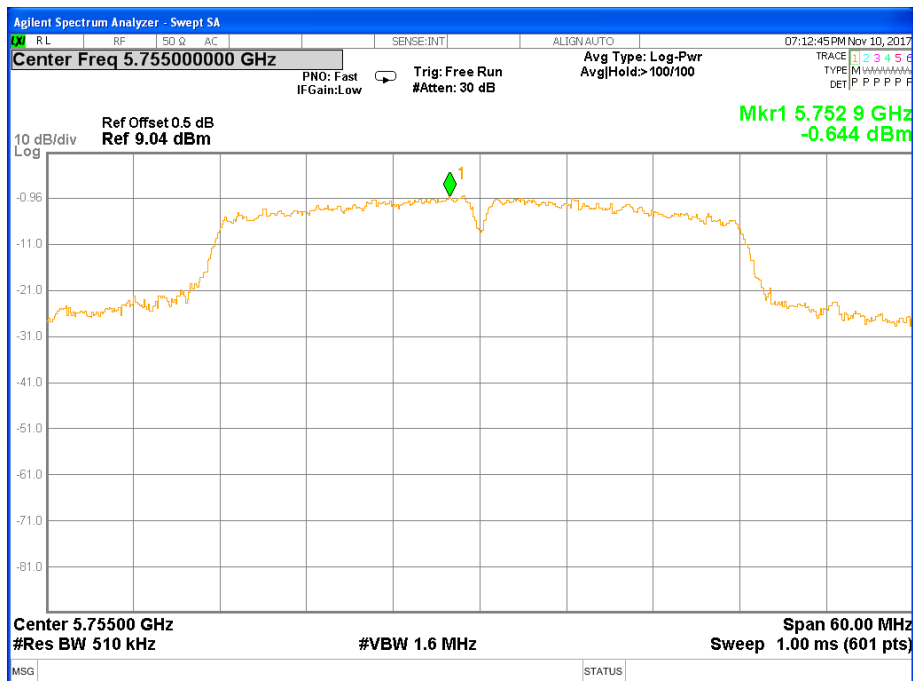


PSD 802.11n(HT40) Channel 159

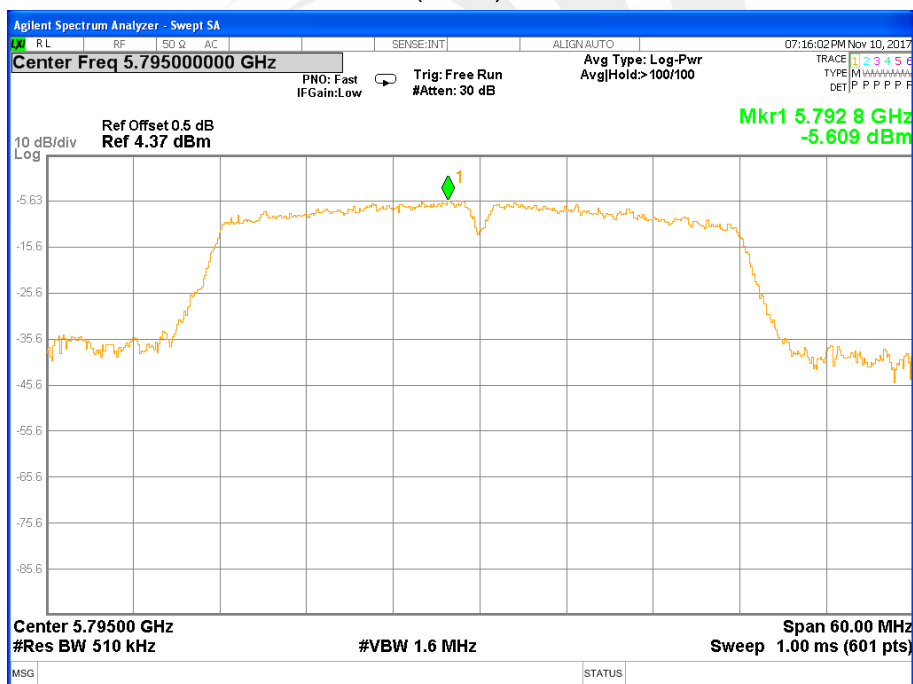




PSD 802.11ac(HT20) Channel 149

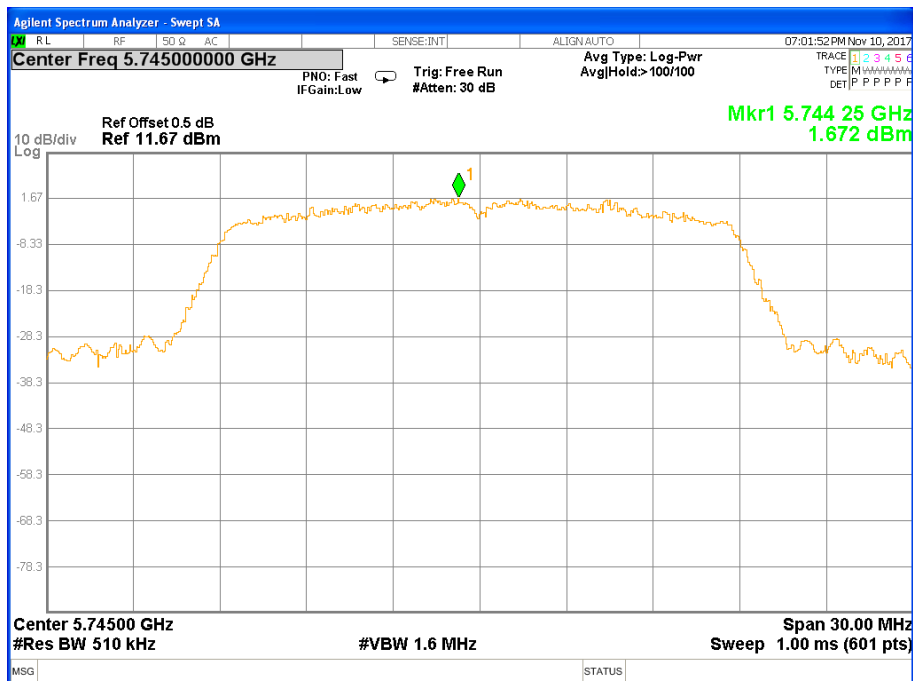


PSD 802.11ac(HT20) Channel 157

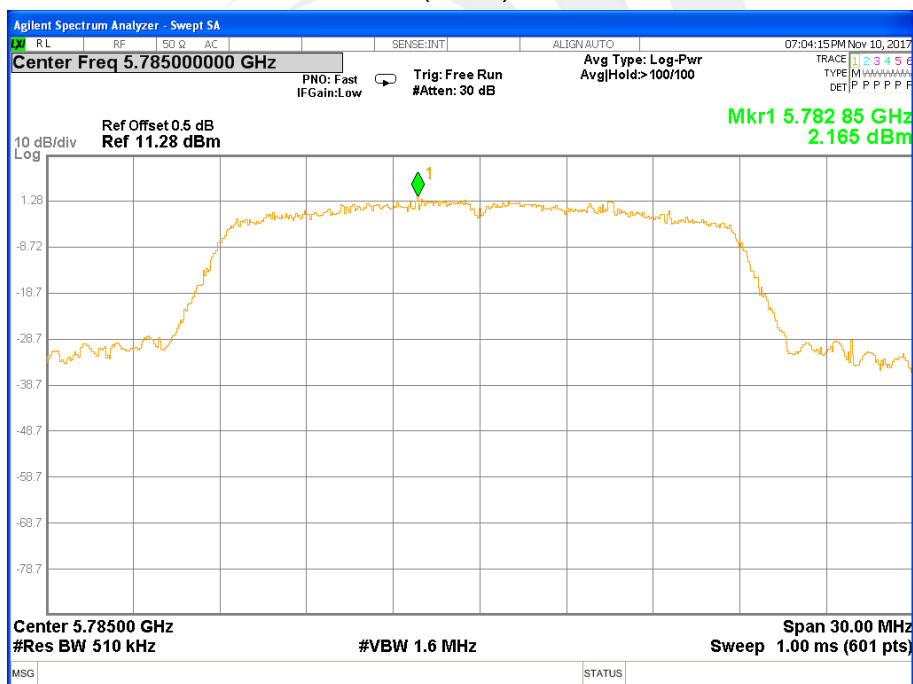




PSD 802.11ac(HT20) Channel 165

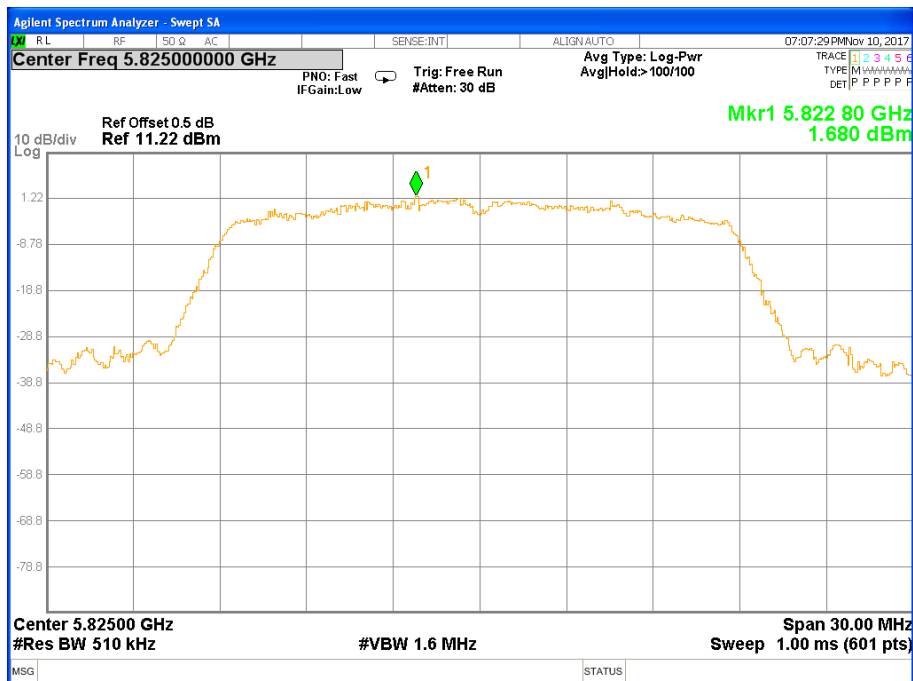


PSD 802.11ac(HT40) Channel 151

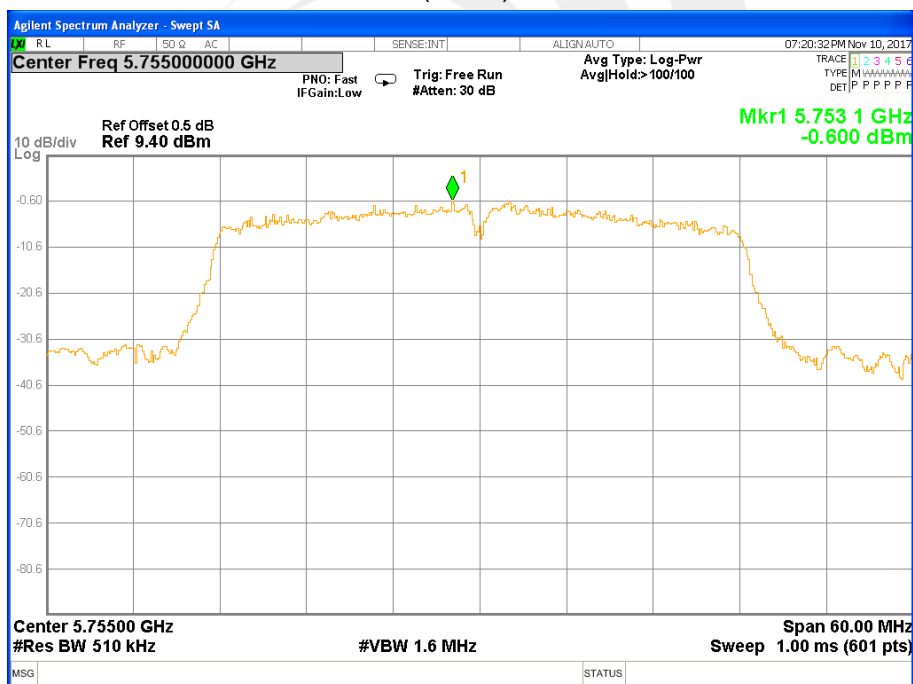




PSD 802.11ac(HT40) Channel 159

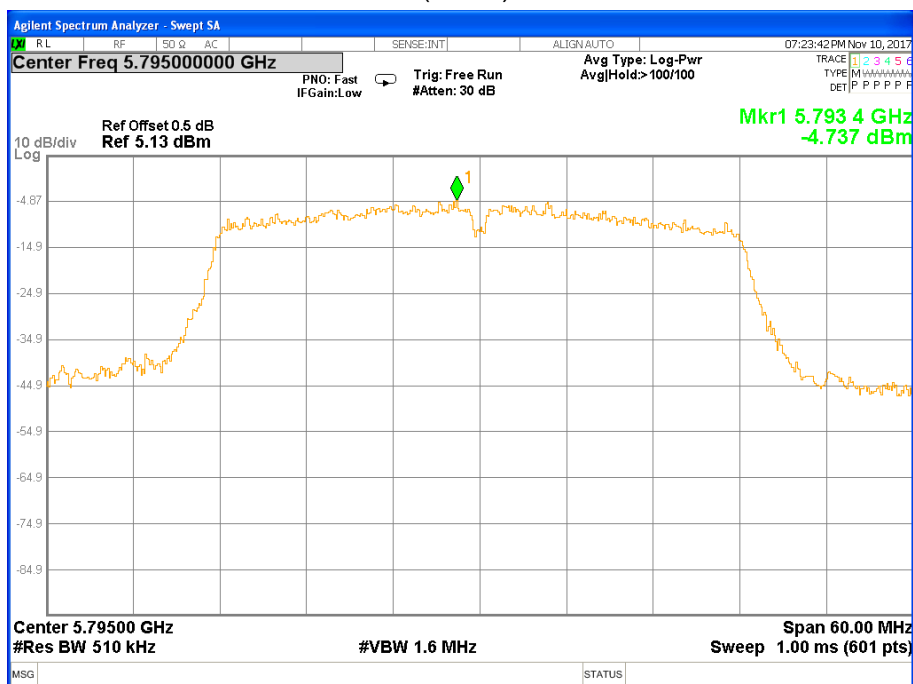

PSD 802.11ac(HT80) Channel 155

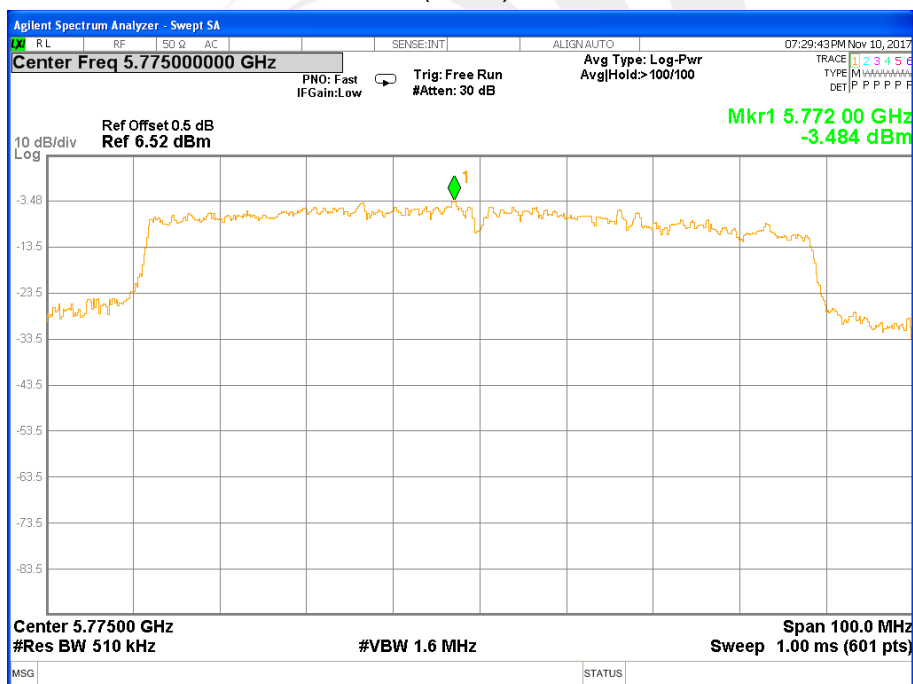

6. BANDWIDTH MEASUREMENT

6.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT

See list of measuring instruments of this test report.

6.2 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW \geq RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




6.6 TEST RESULTS


Frequency (MHz)	802.11a 26dBc Bandwidth(MHz)	Pass/Fail
5745	25.13	N/A
5785	22.65	N/A
5825	20.89	N/A
Frequency (MHz)	802.11n(HT20) 26dBc Bandwidth(MHz)	Pass/Fail
5745	23.90	N/A
5785	23.94	N/A
5825	20.39	N/A
Frequency (MHz)	802.11n(HT40) 26dBc Bandwidth(MHz)	Pass/Fail
5755	54.29	N/A
5795	40.80	N/A
Frequency (MHz)	802.11ac(HT20) 99% 26dBc Bandwidth(MHz)	Pass/Fail
5745	19.66	N/A
5785	19.79	N/A
5825	19.67	N/A
Frequency (MHz)	802.11ac(HT40) 26dBc Bandwidth(MHz)	Pass/Fail
5755	39.54	N/A
5795	39.43	N/A
Frequency (MHz)	802.11ac(HT80) 26dBc Bandwidth(MHz)	Pass/Fail
5775	101.6	N/A



26dBc Bandwidth 802.11a Channel 149

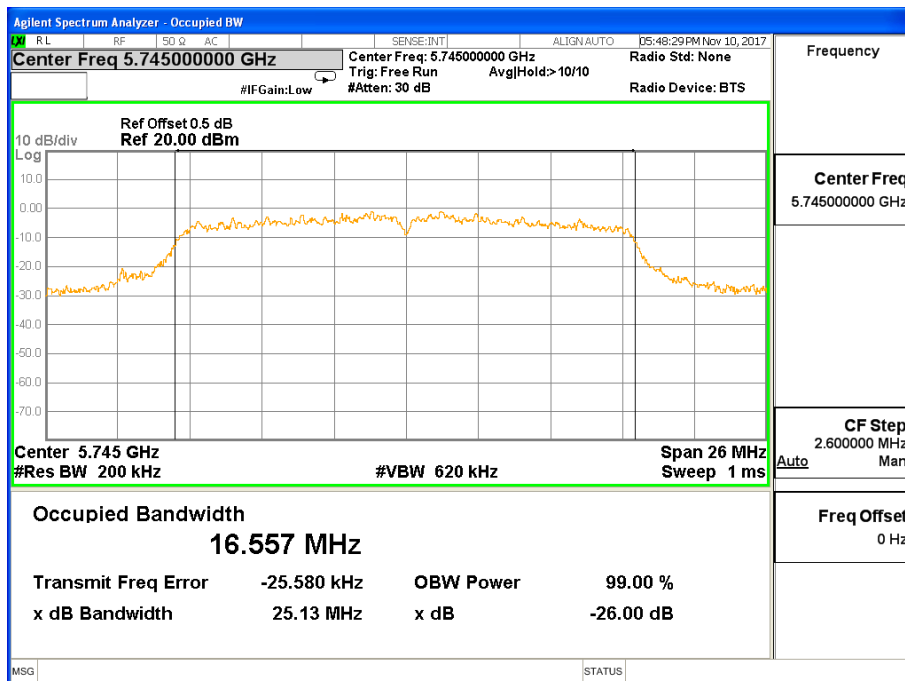


26dBc Bandwidth 802.11a Channel 157

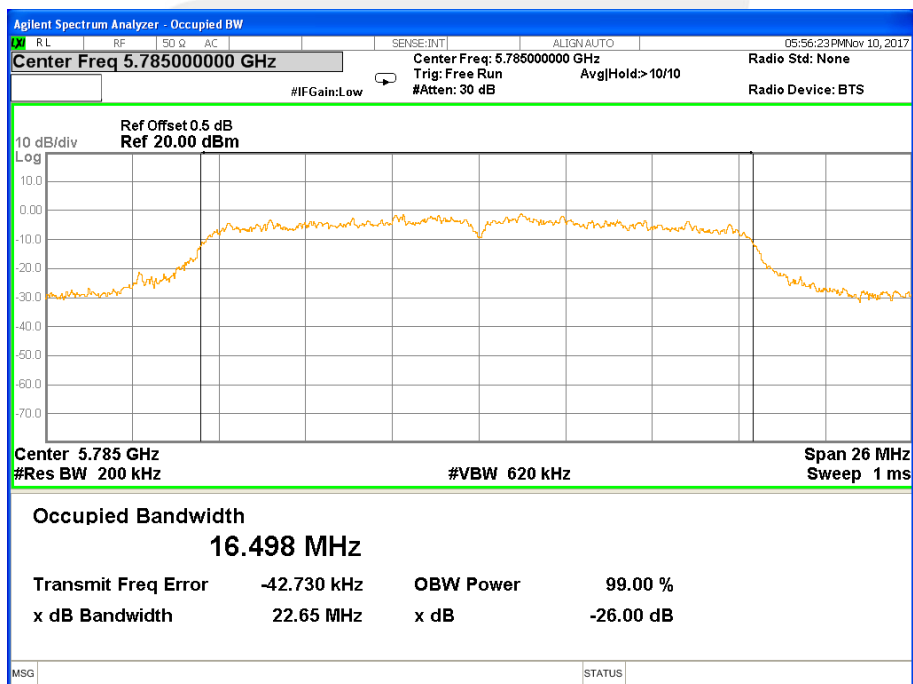




26dBc Bandwidth 802.11a Channel 165

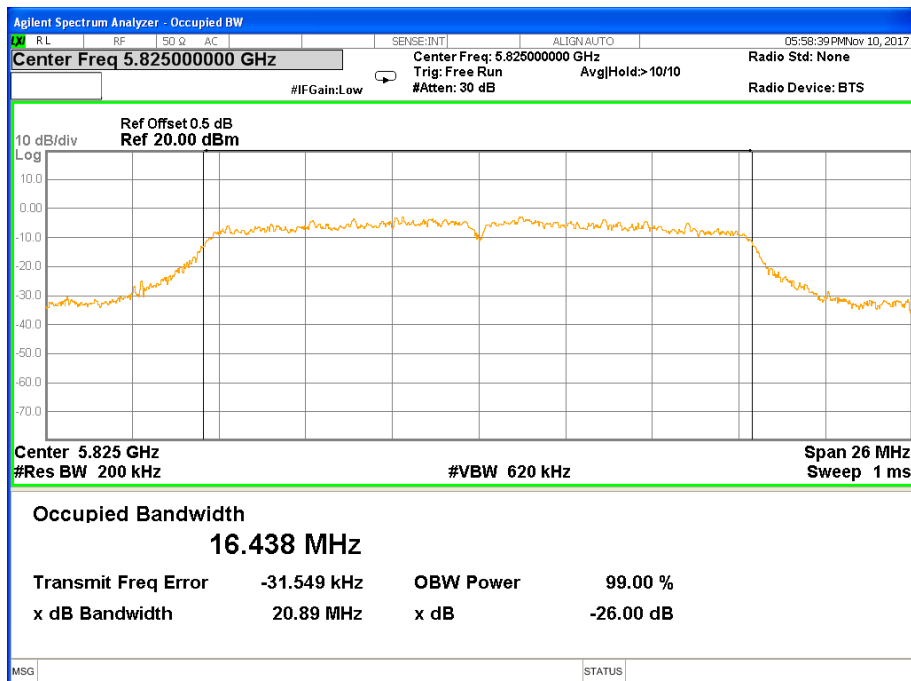


26dBc Bandwidth 802.11n(HT20) Channel 149

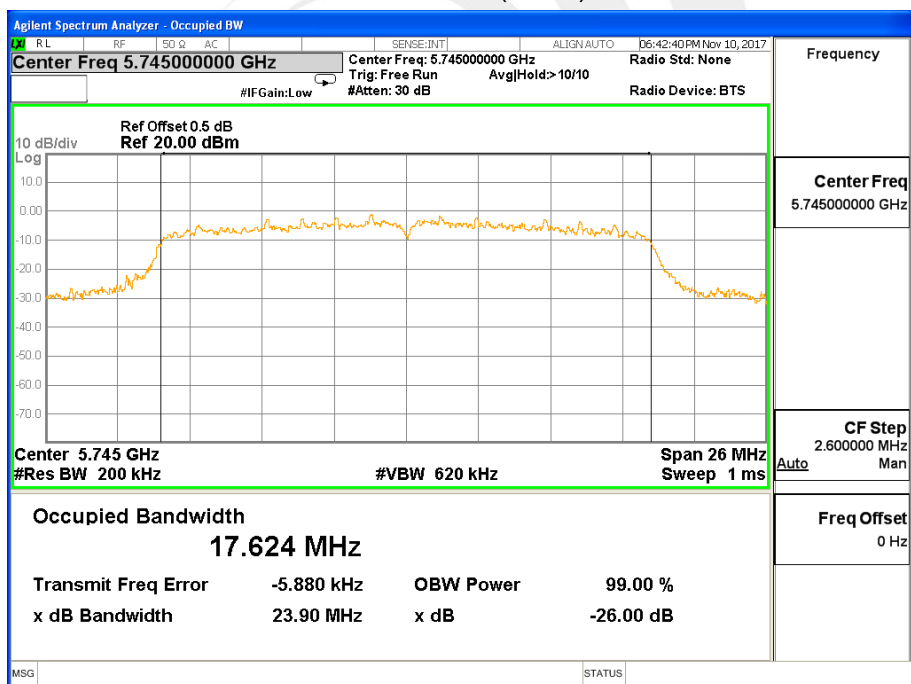




26dBc Bandwidth 802.11n(HT20) Channel 157

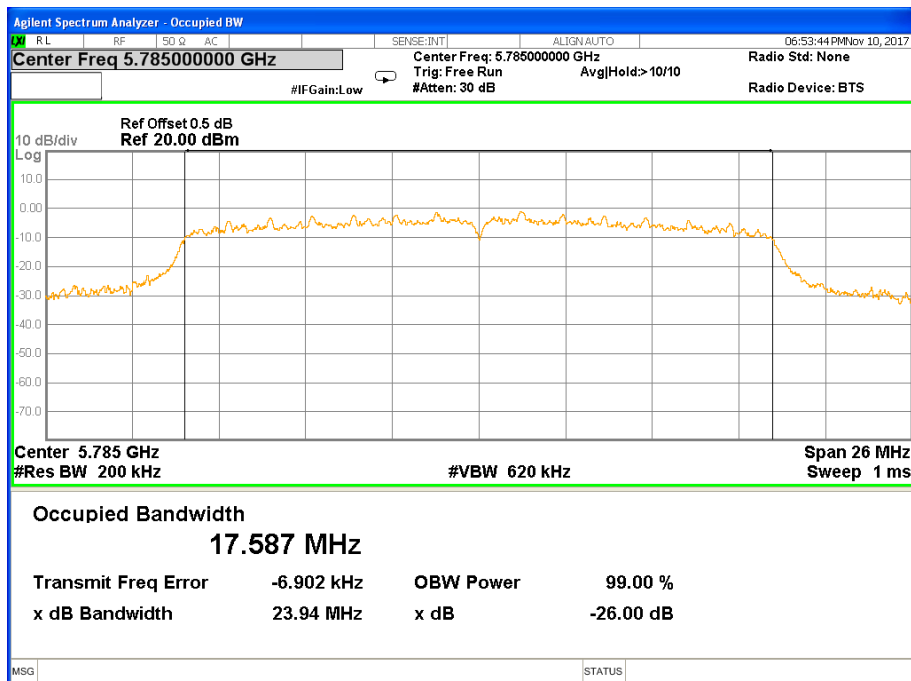


26dBc Bandwidth 802.11n(HT20) Channel 165

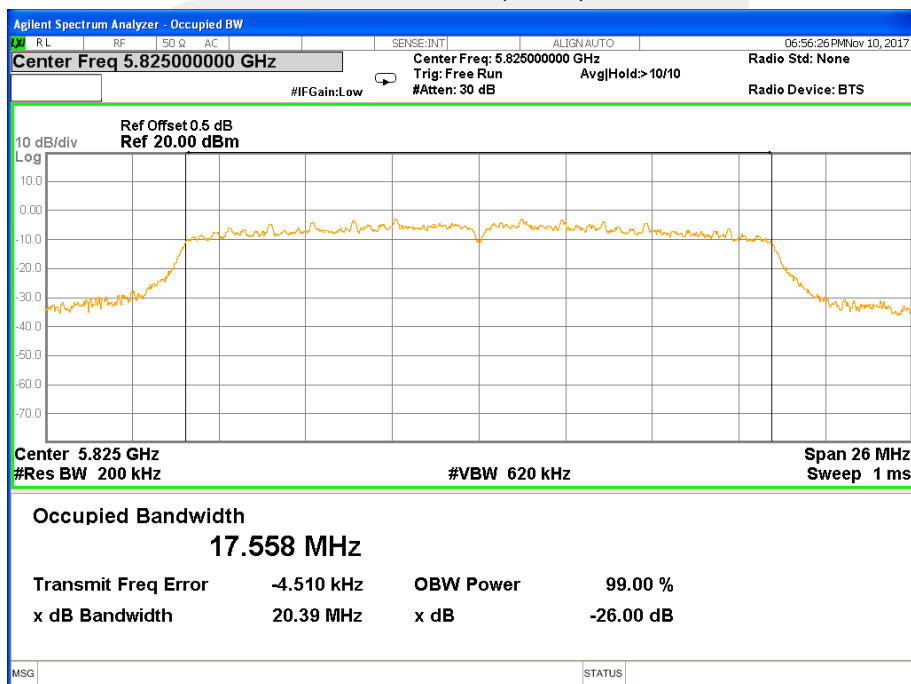




26dBc Bandwidth 802.11n(HT40) Channel 151

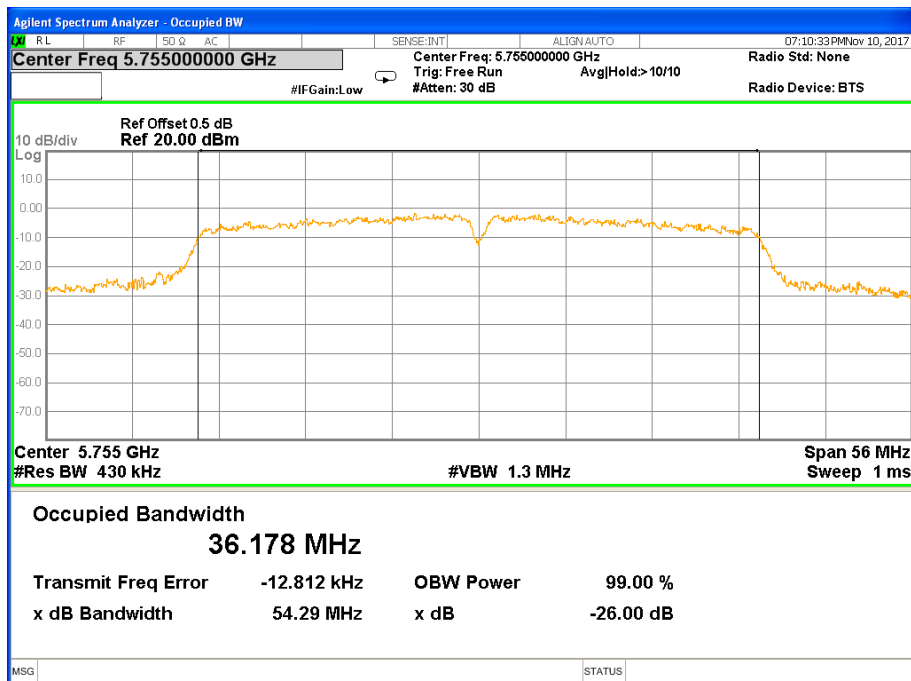


26dBc Bandwidth 802.11n(HT40) Channel 159

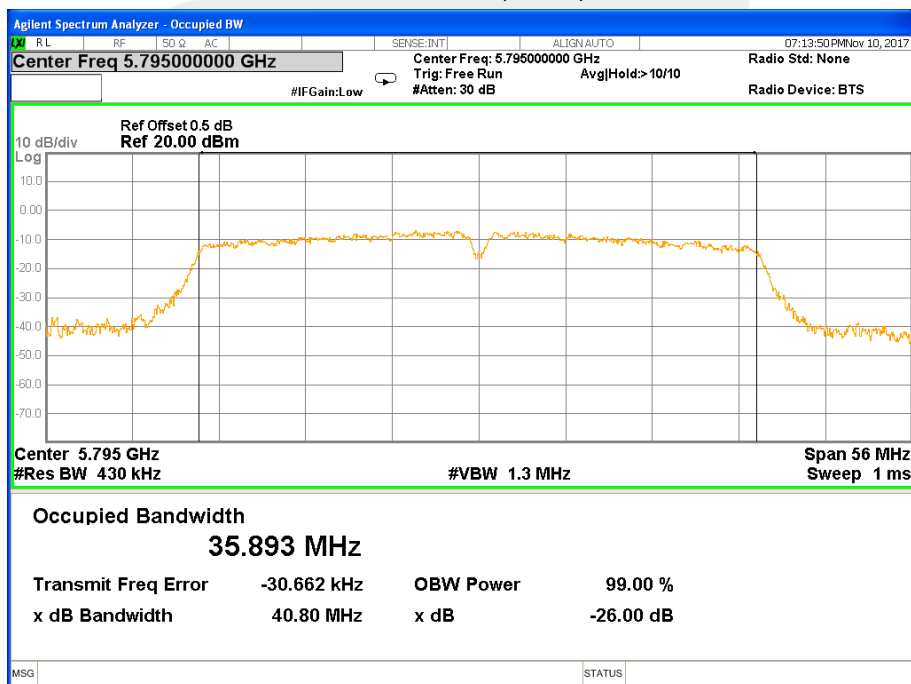




26dBc Bandwidth 802.11ac(HT20) Channel 149

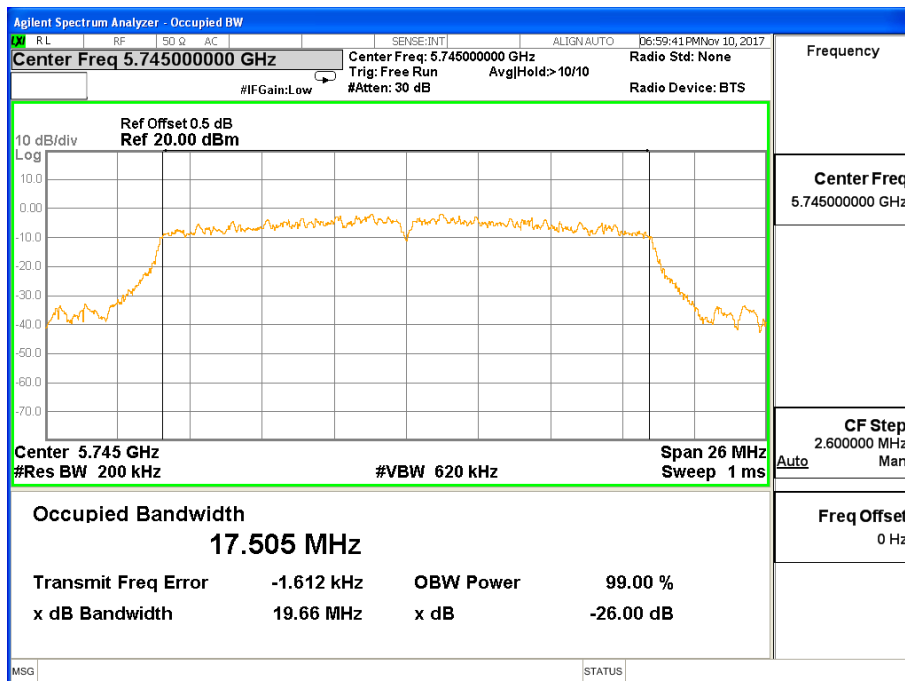


26dBc Bandwidth 802.11ac(HT20) Channel 157

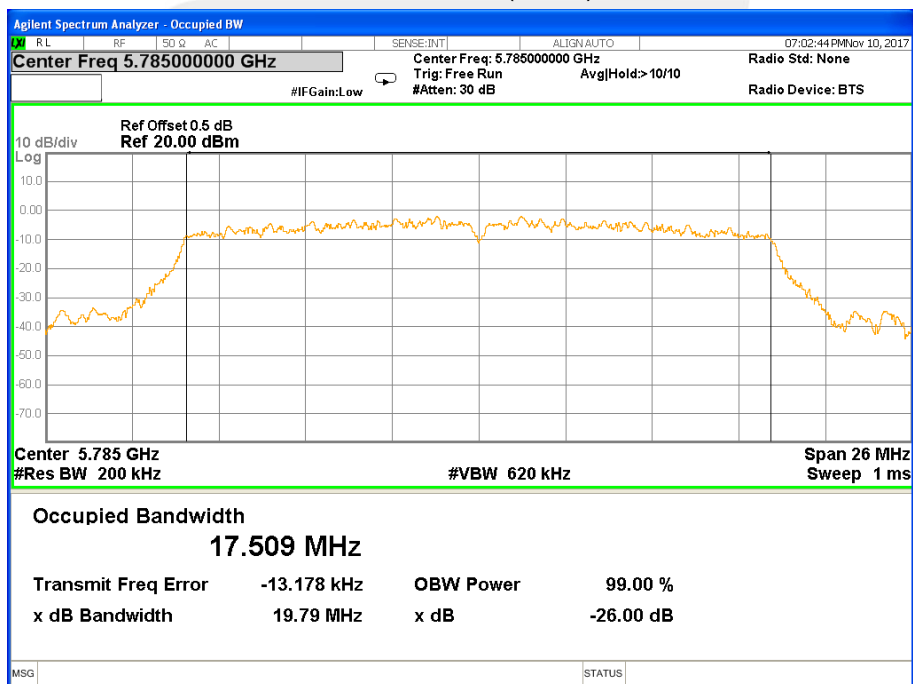




26dBc Bandwidth 802.11ac(HT20) Channel 165

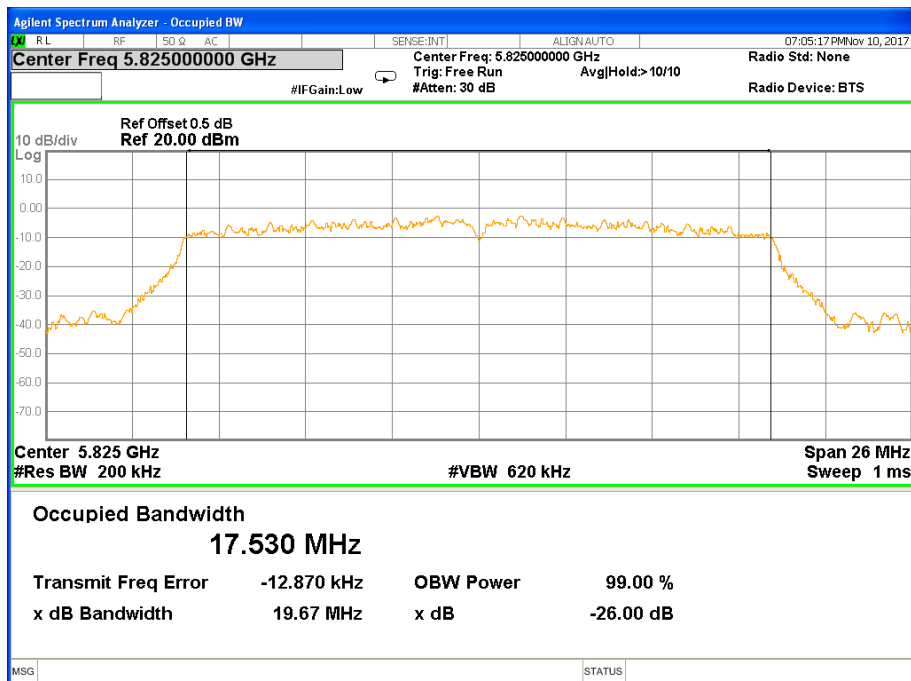


26dBc Bandwidth 802.11ac(HT40) Channel 151

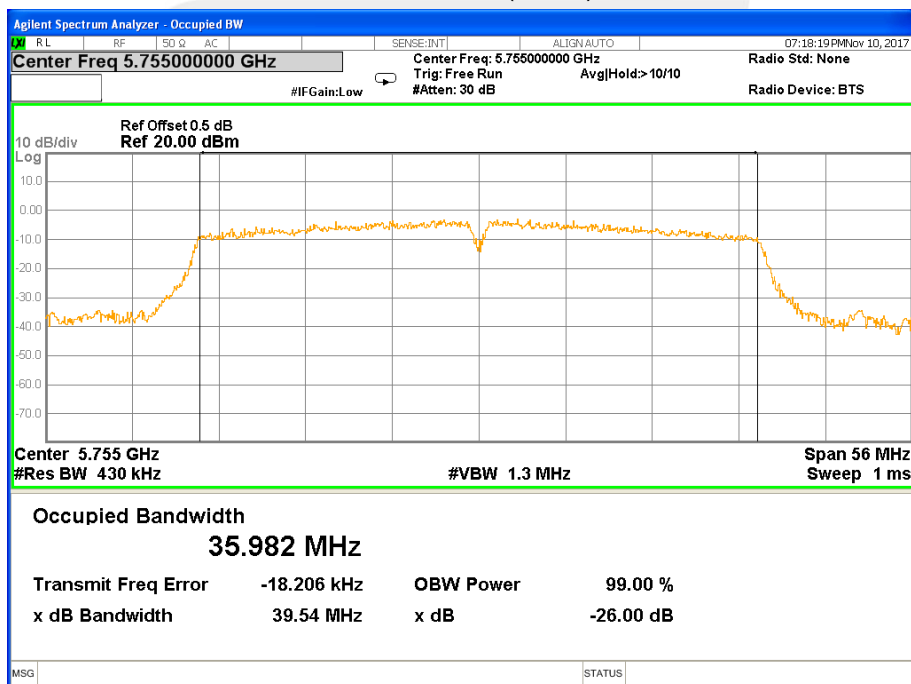




26dBc Bandwidth 802.11ac(HT40) Channel 159

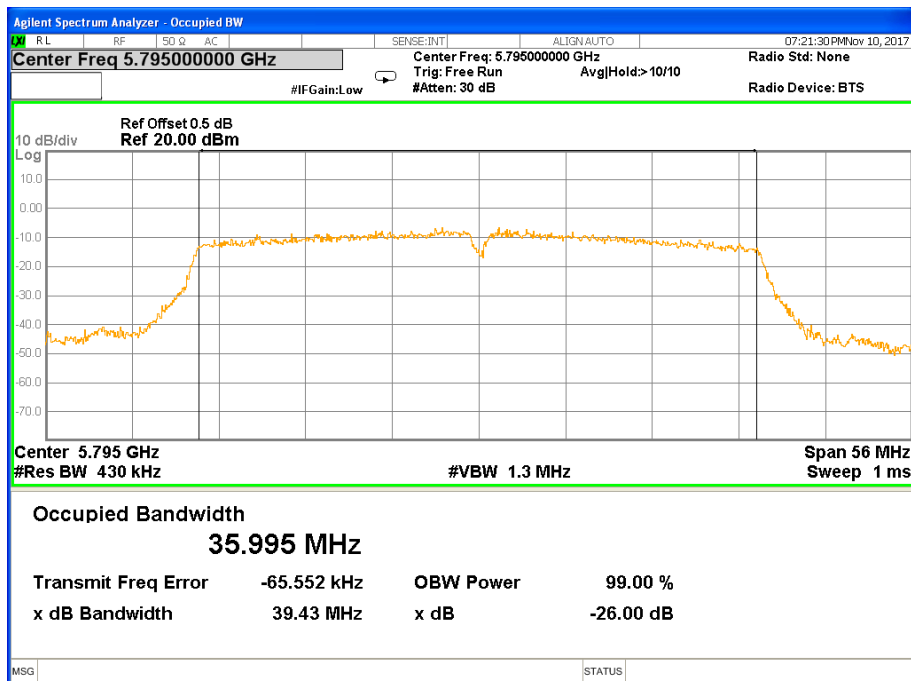

26dBc Bandwidth 802.11ac(HT80) Channel 155

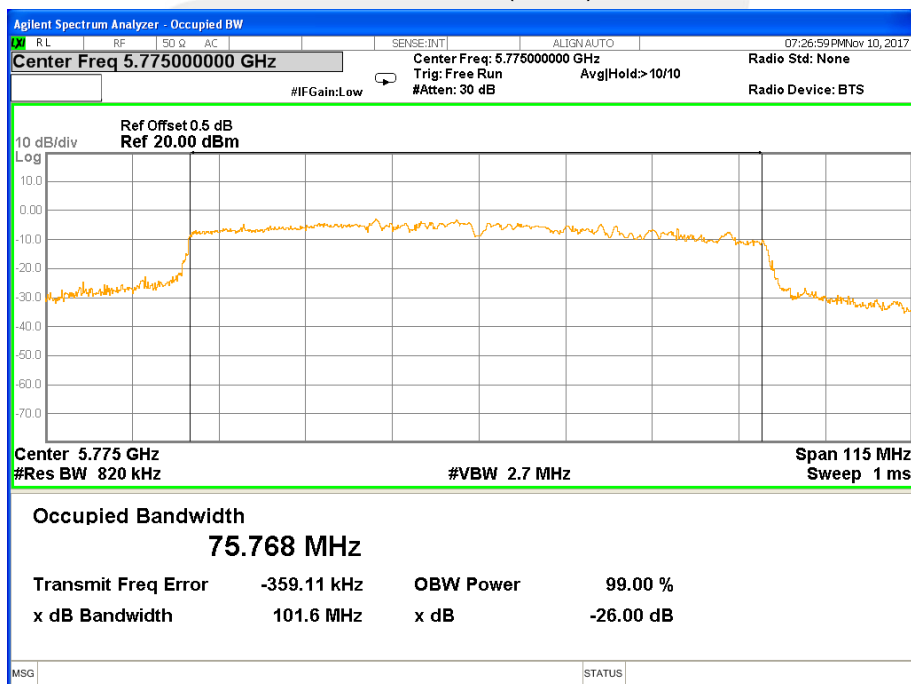



7. OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT

The following procedure shall be used for measuring (99 %) power bandwidth:

7.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v01r03.


The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

7.2 DEVIATION FROM STANDARD

No deviation.

7.3 TEST SETUP

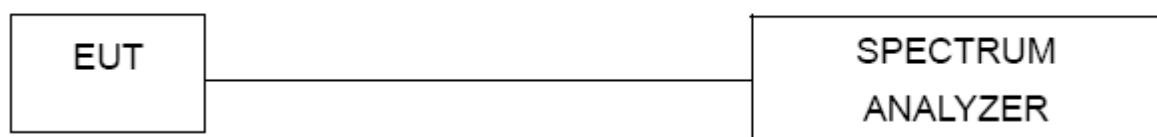

7.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


7.5 TEST RESULTS




Frequency (MHz)	802.11a 99%Bandwidth(MHz)	Pass/Fail
5745	16.557	N/A
5785	16.498	N/A
5825	16.438	N/A
Frequency (MHz)	802.11n(HT20) 99%Bandwidth(MHz)	Pass/Fail
5745	17.624	N/A
5785	17.587	N/A
5825	17.558	N/A
Frequency (MHz)	802.11n(HT40) 99%Bandwidth(MHz)	Pass/Fail
5755	36.178	N/A
5795	35.893	N/A
Frequency (MHz)	802.11ac(HT20) 99% Bandwidth(MHz)	Pass/Fail
5745	17.505	N/A
5785	17.509	N/A
5825	17.530	N/A
Frequency (MHz)	802.11ac(HT40) 99%Bandwidth(MHz)	Pass/Fail
5755	35.982	N/A
5795	35.995	N/A
Frequency (MHz)	802.11ac(HT80) 99%Bandwidth(MHz)	Pass/Fail
5775	75.768	N/A



99% Bandwidth 802.11a Channel 149

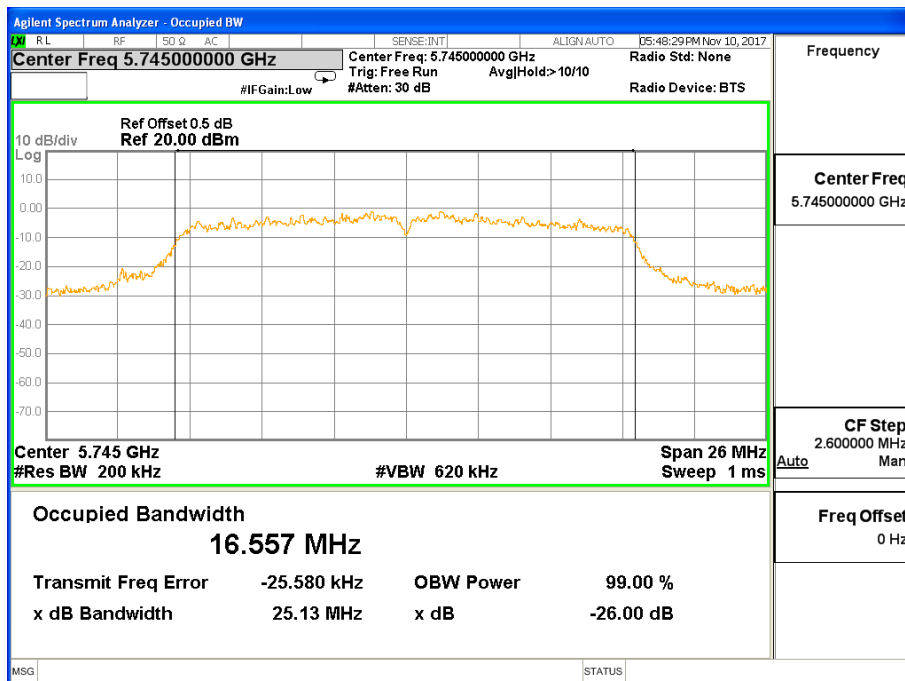


99% Bandwidth 802.11a Channel 157

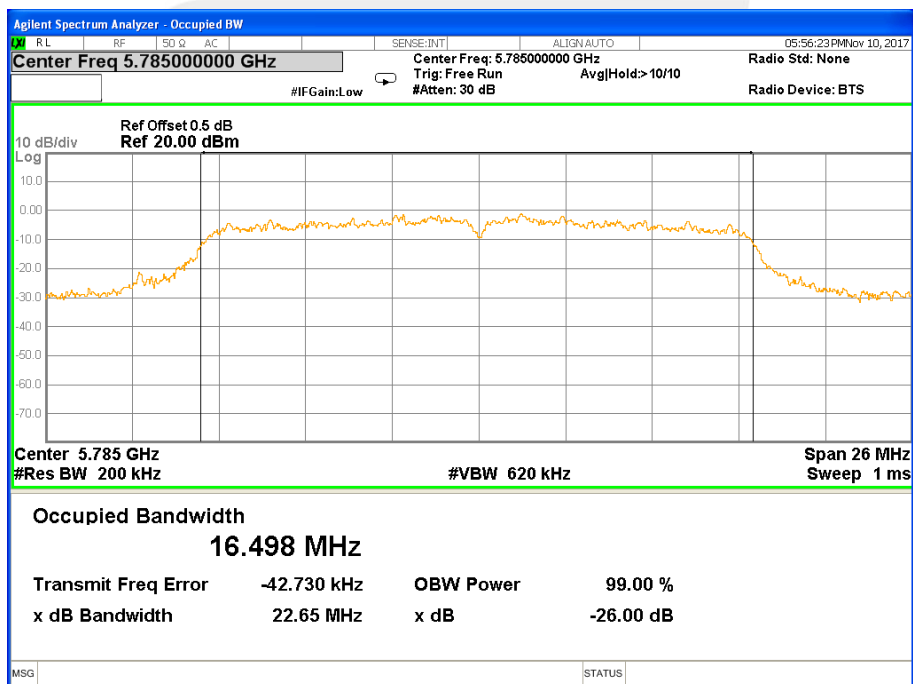




99% Bandwidth 802.11a Channel 165

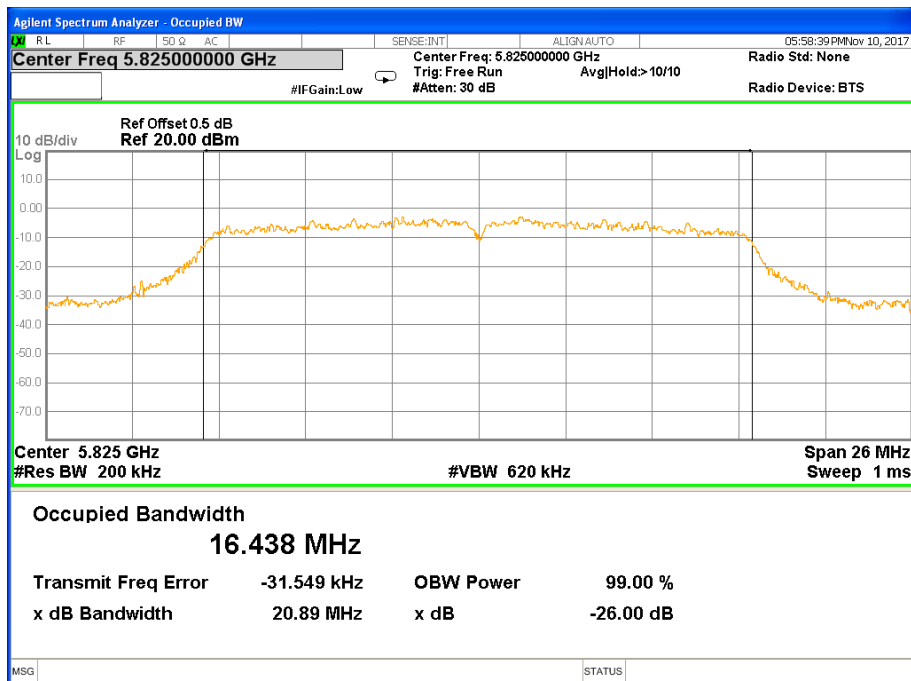


99% Bandwidth 802.11n(HT20) Channel 149

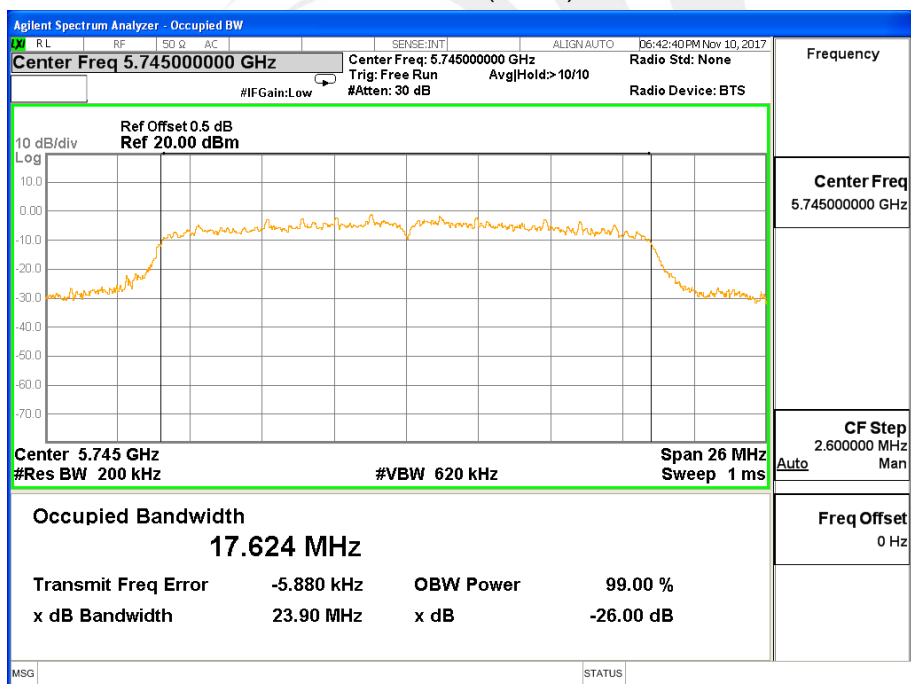




99% Bandwidth 802.11n(HT20) Channel 157

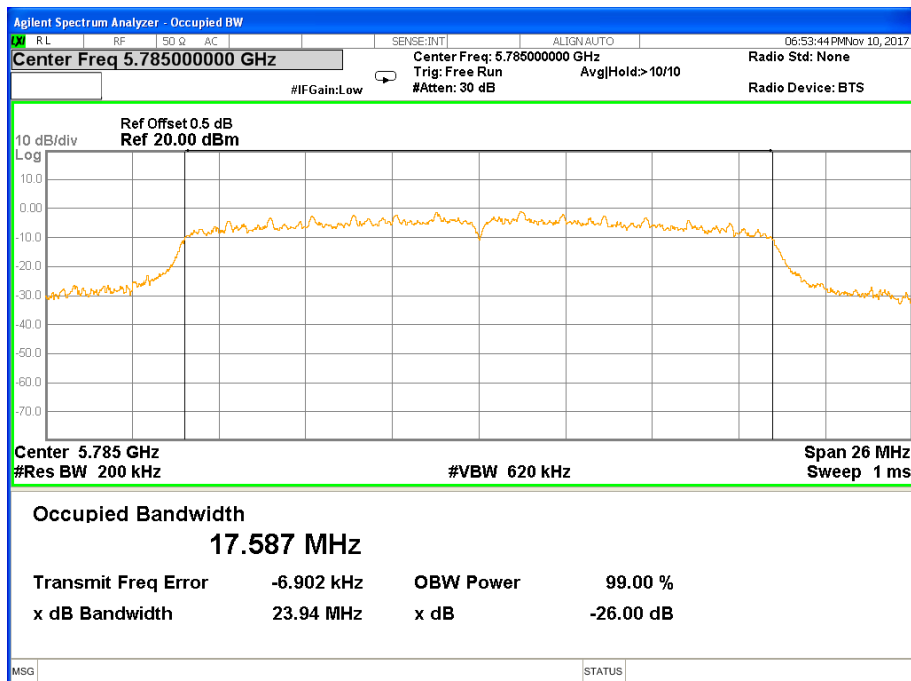


99% Bandwidth 802.11n(HT20) Channel 165

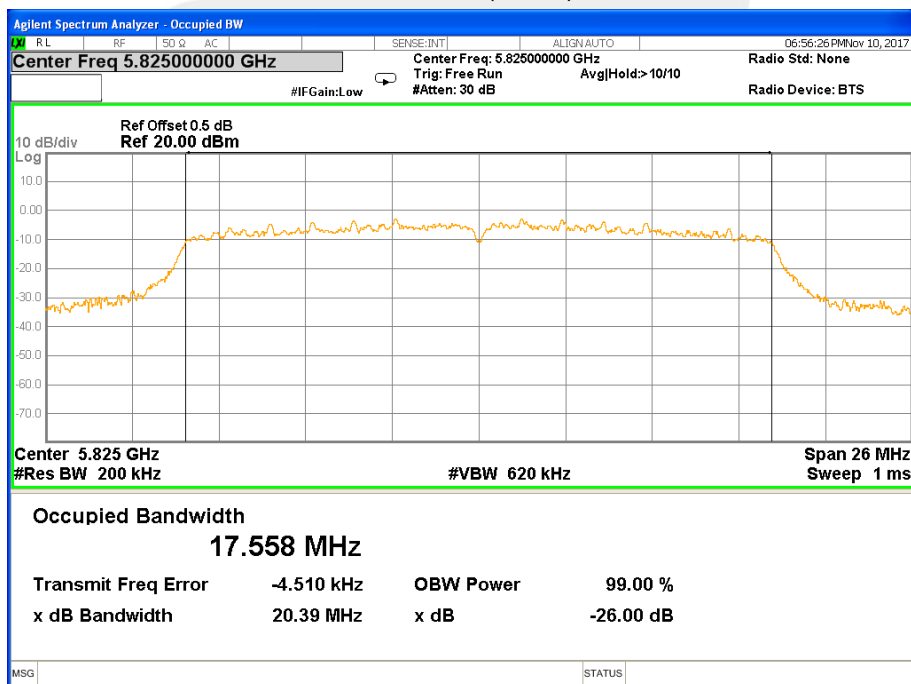




99% Bandwidth 802.11n(HT40) Channel 151

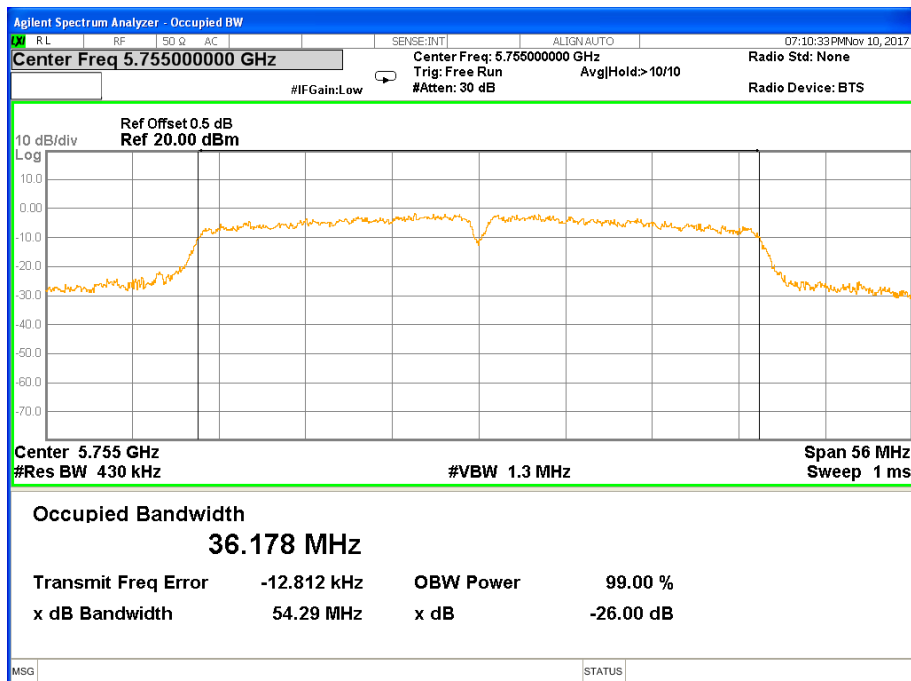


99% Bandwidth 802.11n(HT40) Channel 159

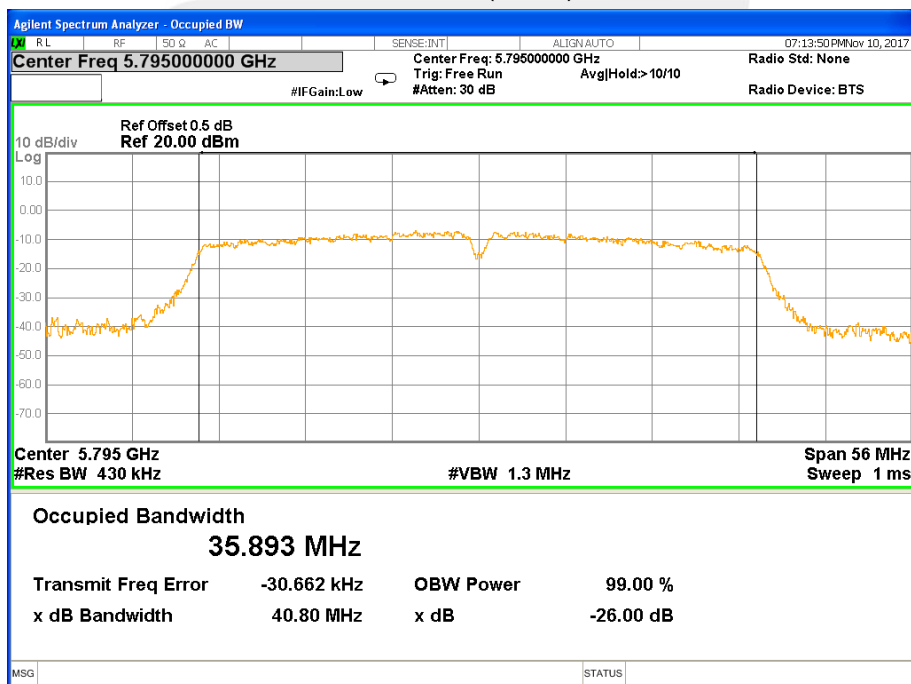




99% Bandwidth 802.11ac(HT20) Channel 149

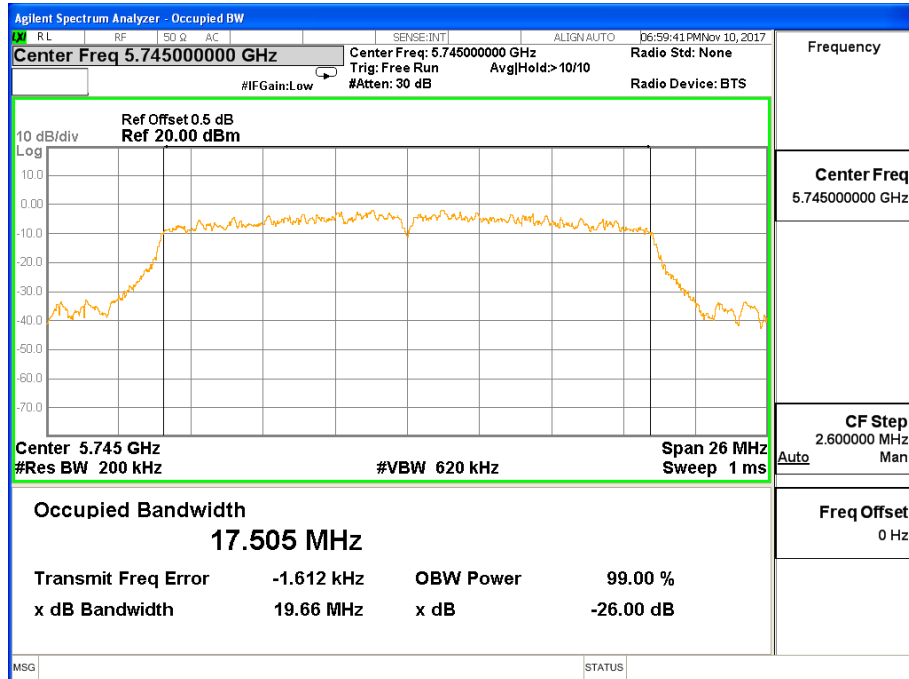


99% Bandwidth 802.11ac(HT20) Channel 157

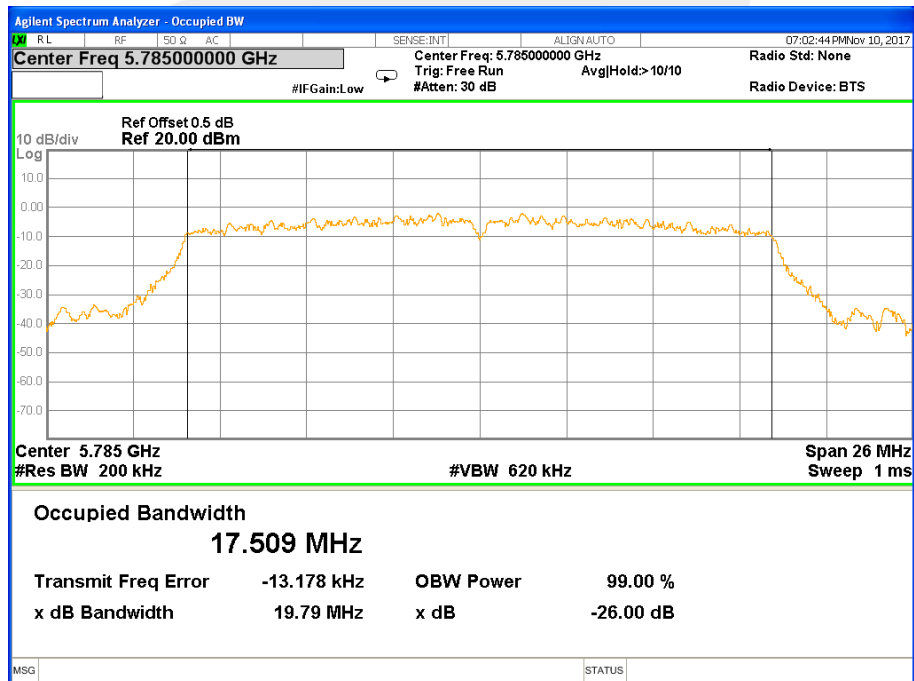




99% Bandwidth 802.11ac(HT20) Channel 165

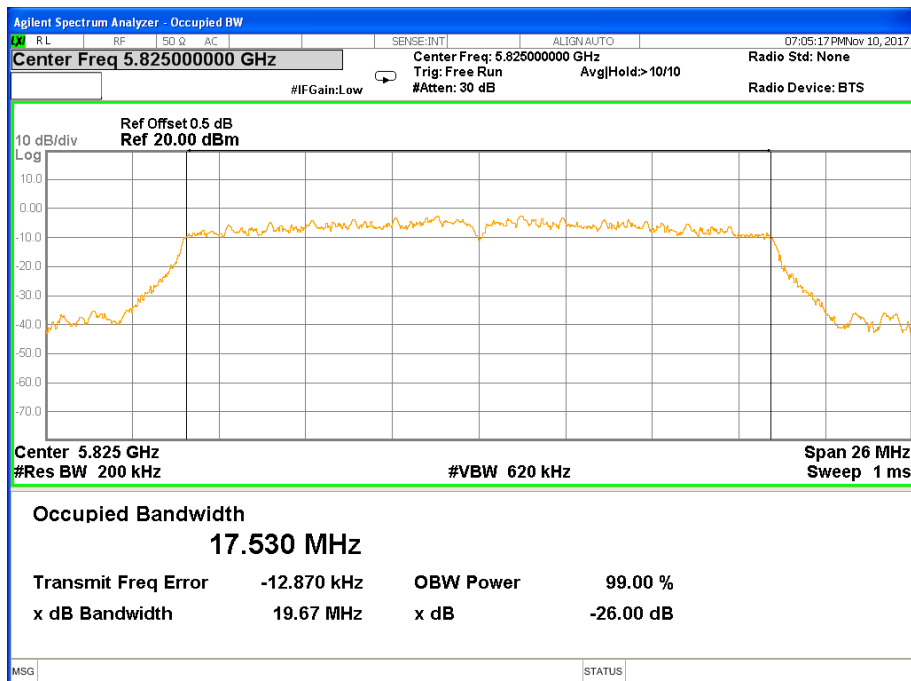


99% Bandwidth 802.11ac(HT40) Channel 151

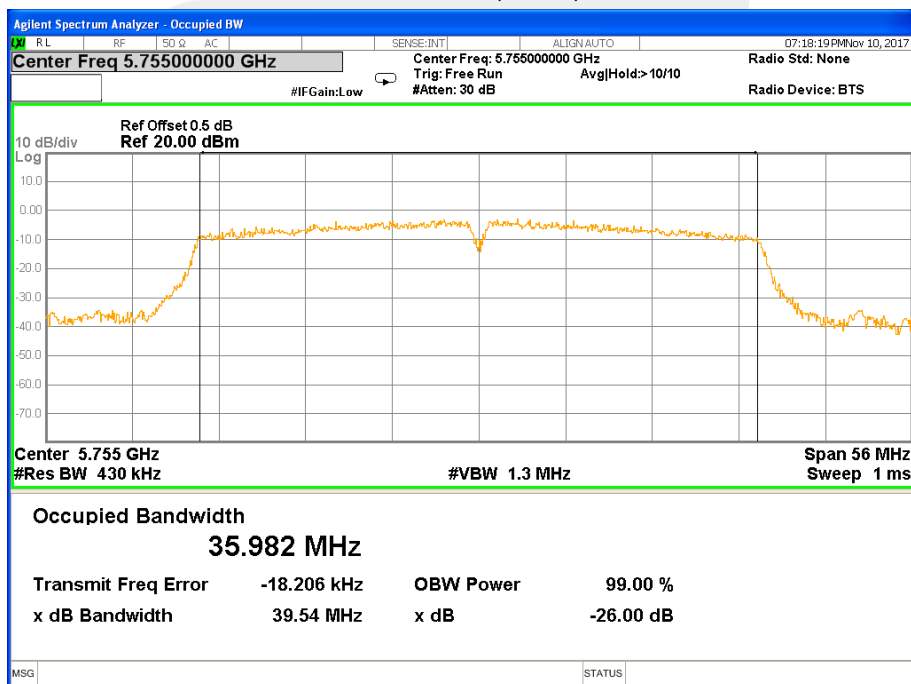




99% Bandwidth 802.11ac(HT40) Channel 159

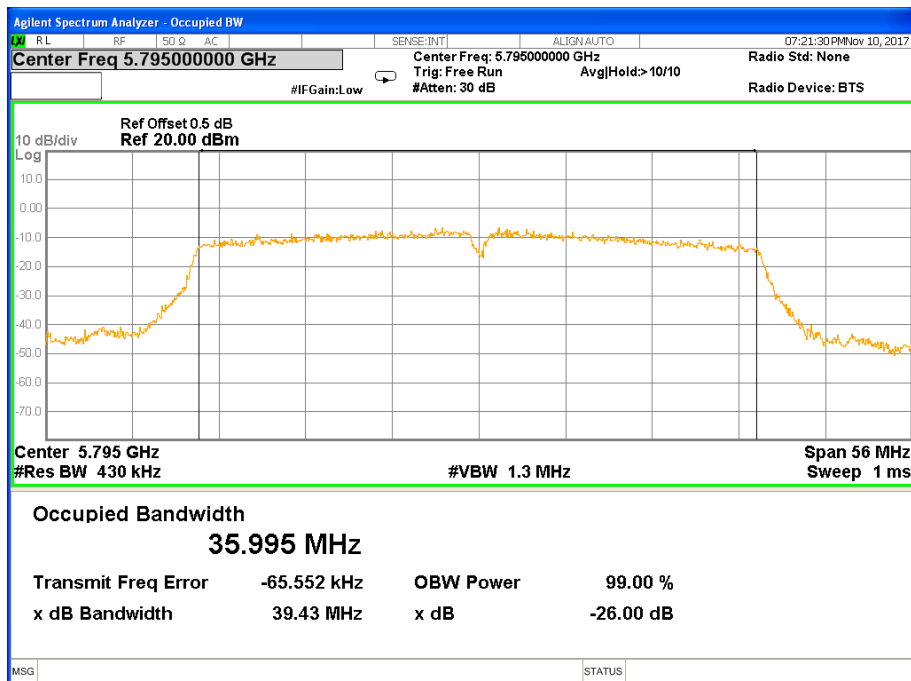

99% Bandwidth 802.11ac(HT80) Channel 155

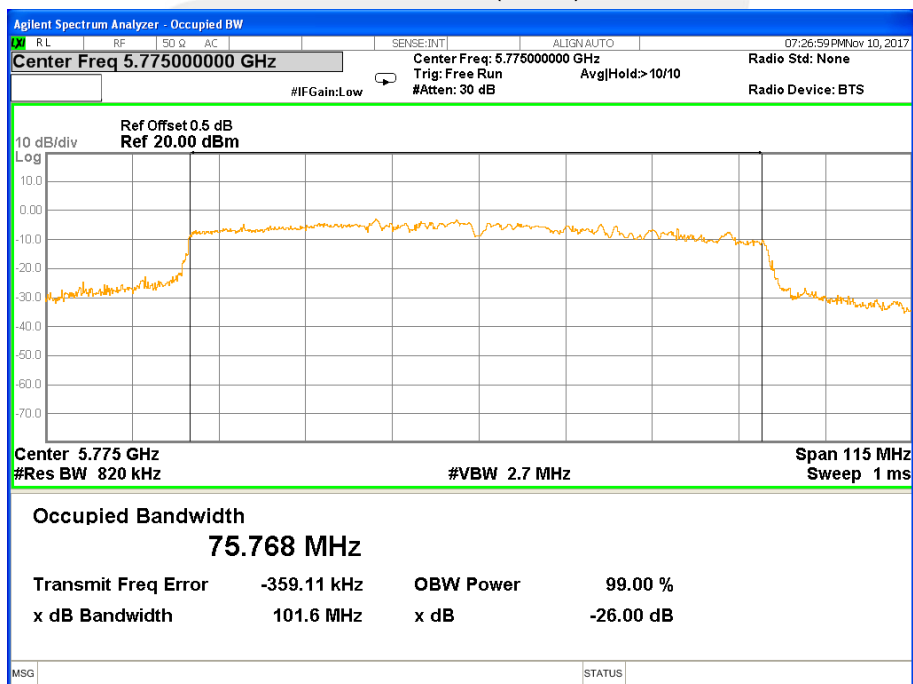



8. MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT

Section 15.407(e) specifies the minimum 6 db emission bandwidth of at least 500 khz for the band 5.725-5.85 ghz. The following procedure shall be used for measuring this bandwidth:

8.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v01r03.
 - a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

8.2 DEVIATION FROM STANDARD

No deviation.

8.3 TEST SETUP



8.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


8.5 TEST RESULTS




Frequency (MHz)	802.11a 6dBc Bandwidth(MHz)	Pass/Fail
5745	15.11	N/A
5785	15.10	N/A
5825	15.11	N/A
Frequency (MHz)	802.11n(HT20) 6dBc Bandwidth(MHz)	Pass/Fail
5745	15.12	N/A
5785	15.11	N/A
5825	15.05	N/A
Frequency (MHz)	802.11n(HT40) 6dBc Bandwidth(MHz)	Pass/Fail
5755	35.06	N/A
5795	35.02	N/A
Frequency (MHz)	802.11ac(HT20) 99% 6dBc Bandwidth(MHz)	Pass/Fail
5745	15.10	N/A
5785	15.12	N/A
5825	15.11	N/A
Frequency (MHz)	802.11ac(HT40) 6dBc Bandwidth(MHz)	Pass/Fail
5755	35.09	N/A
5795	35.35	N/A
Frequency (MHz)	802.11ac(HT80) 6dBc Bandwidth(MHz)	Pass/Fail
5775	67.68	N/A



6dBc Bandwidth 802.11a Channel 149

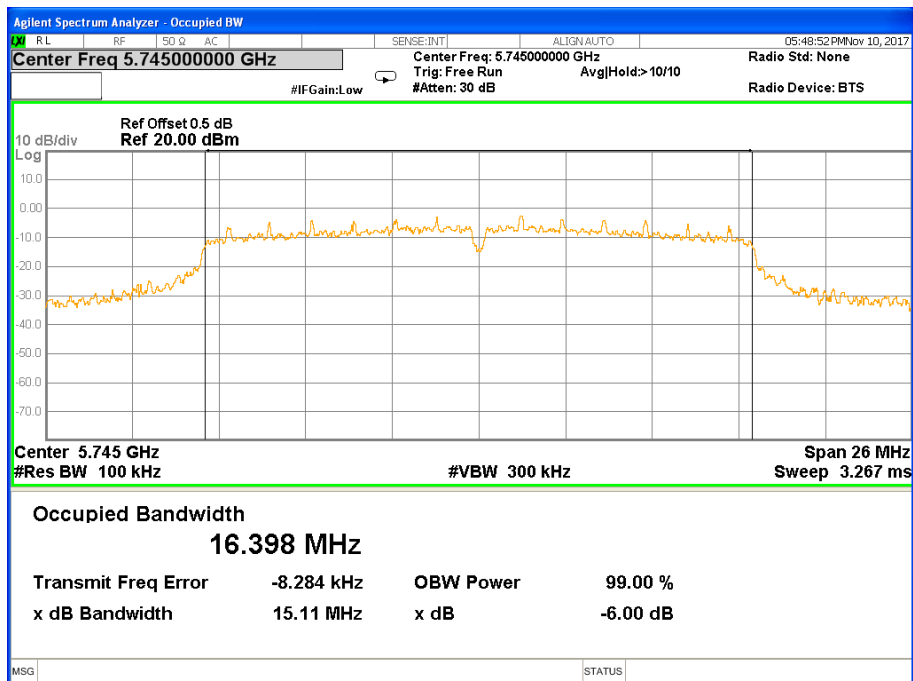


6dBc Bandwidth 802.11a Channel 157

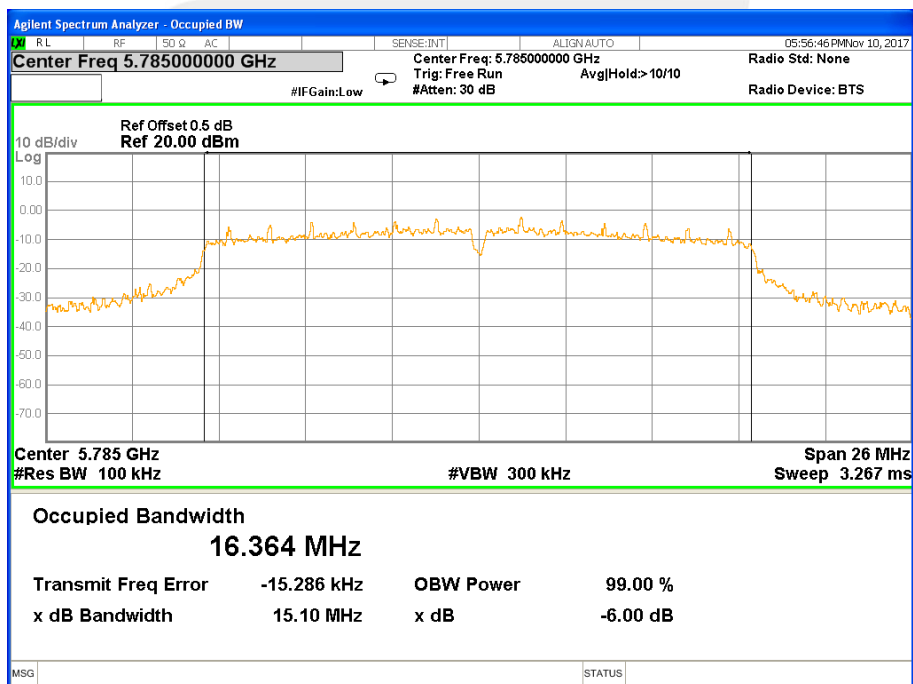




6dBc Bandwidth 802.11a Channel 165

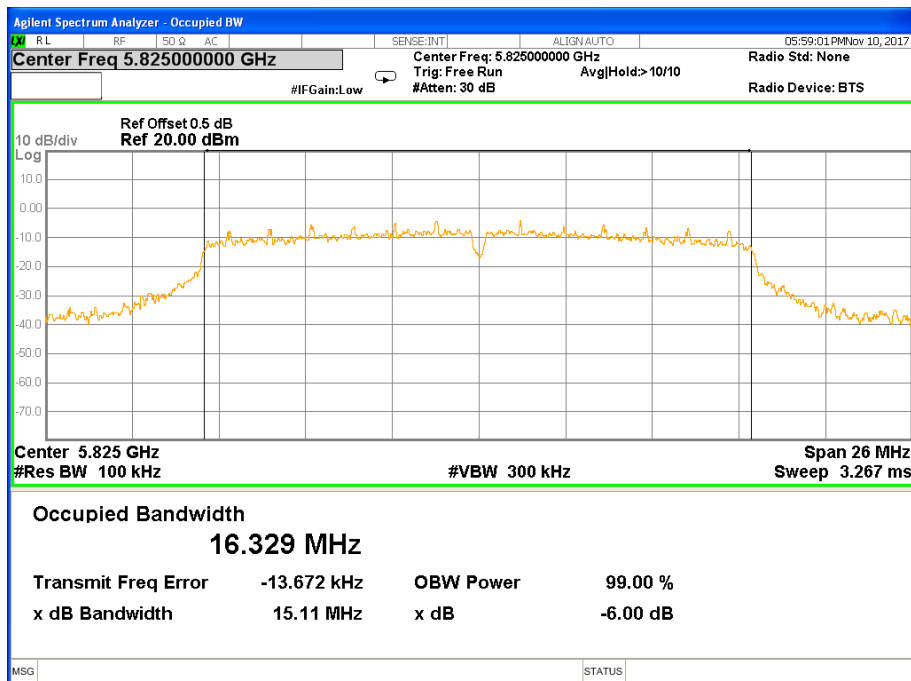


6dBc Bandwidth 802.11n(HT20) Channel 149

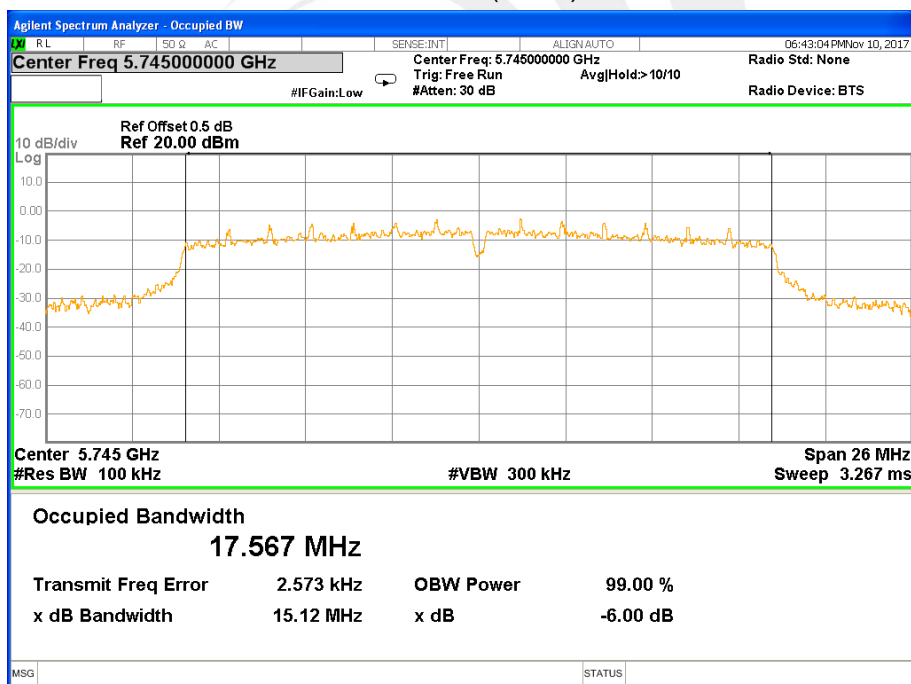




6dBc Bandwidth 802.11n(HT20) Channel 157

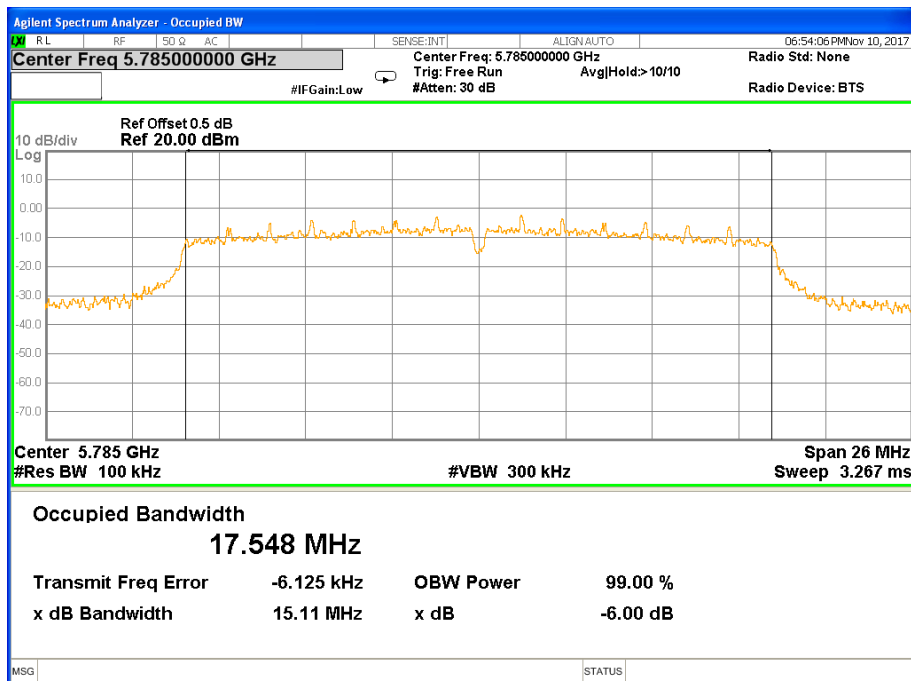


6dBc Bandwidth 802.11n(HT20) Channel 165

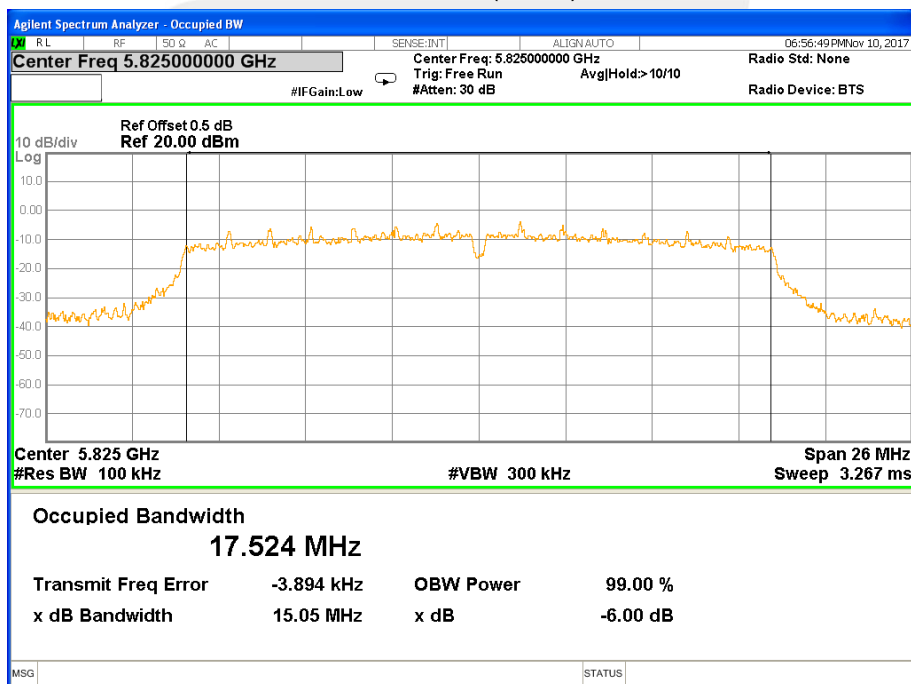




6dBc Bandwidth 802.11n(HT40) Channel 151

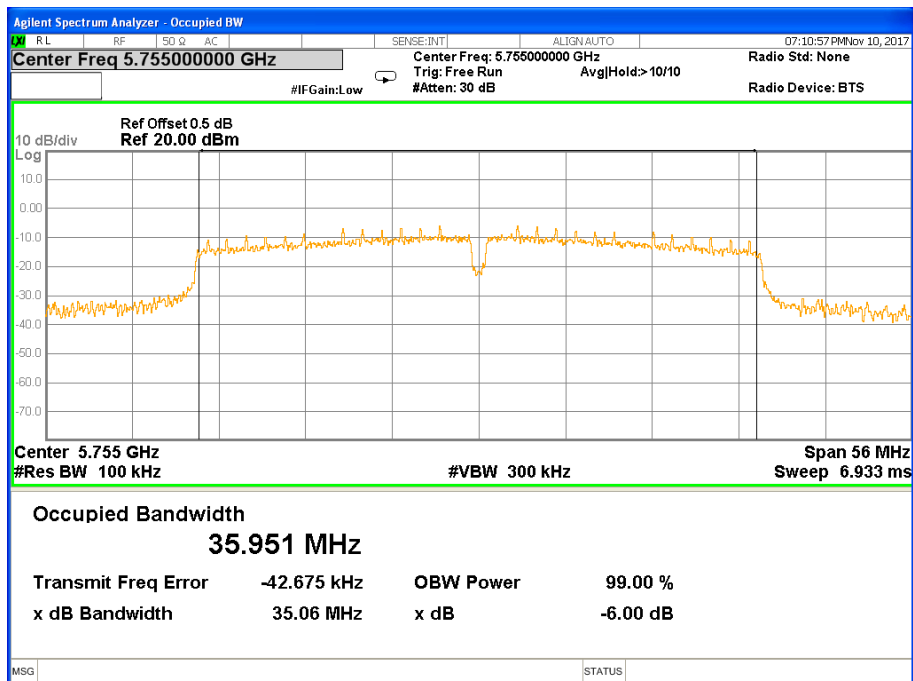


6dBc Bandwidth 802.11n(HT40) Channel 159

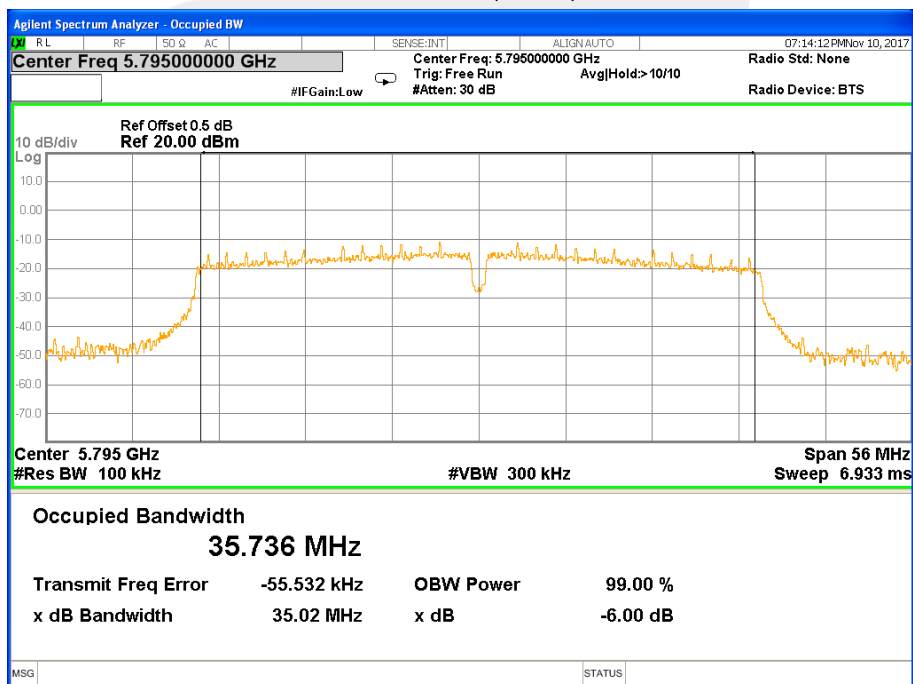




6dBc Bandwidth 802.11ac(HT20) Channel 149

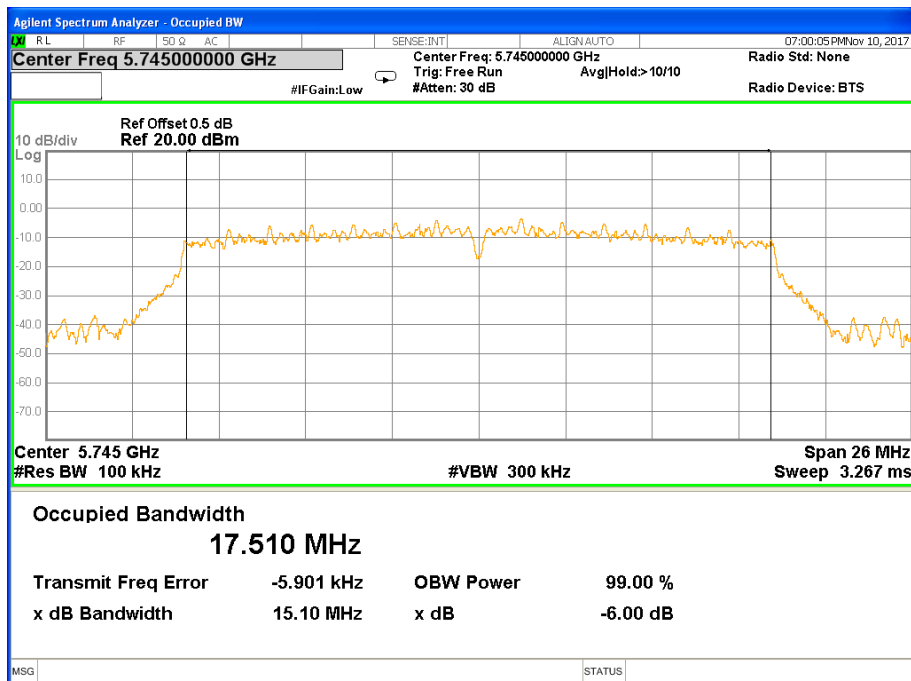


6dBc Bandwidth 802.11ac(HT20) Channel 157

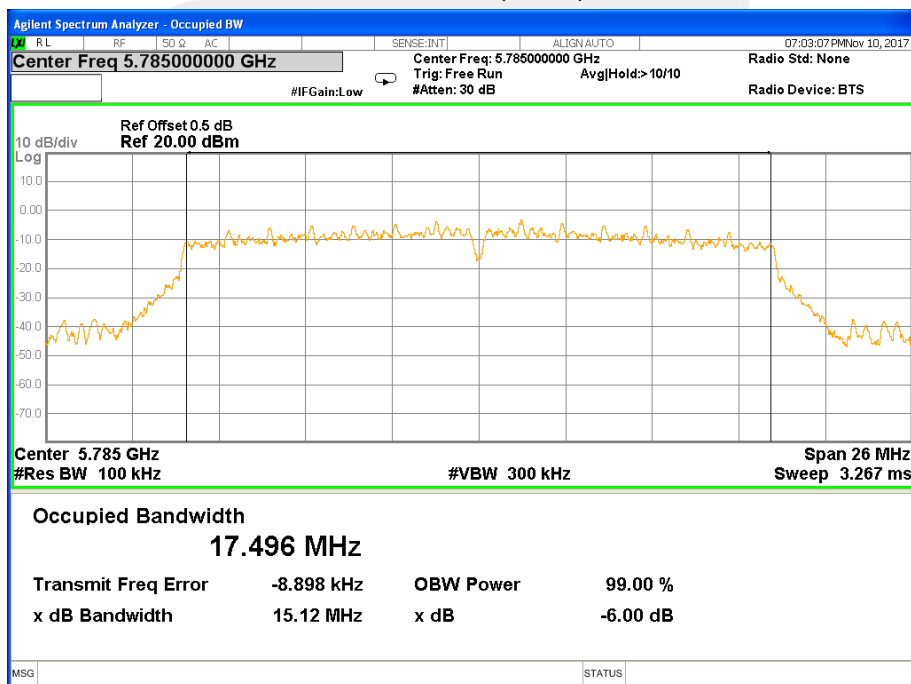




6dBc Bandwidth 802.11ac(HT20) Channel 165

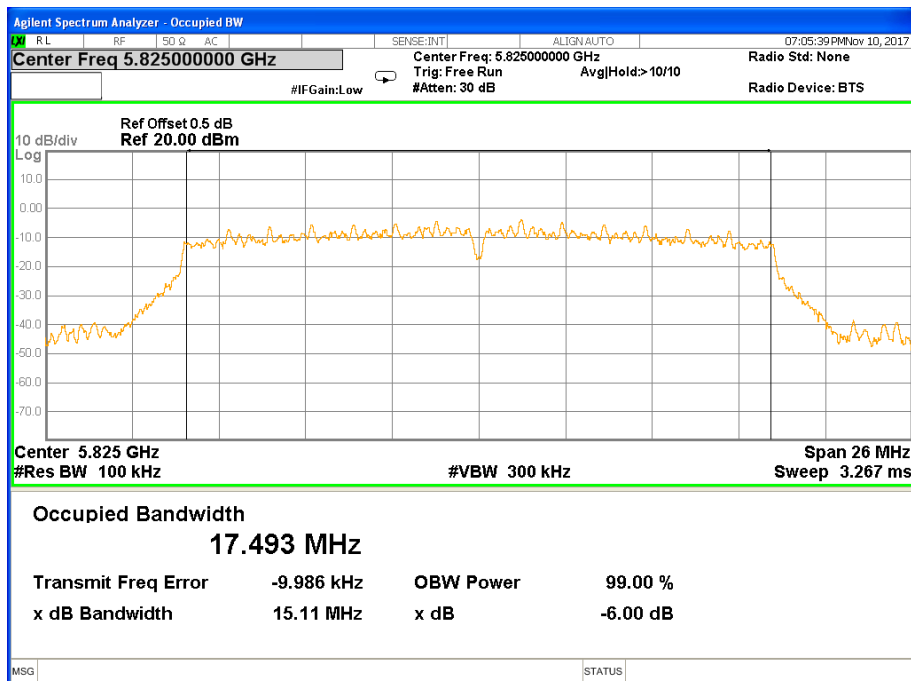


6dBc Bandwidth 802.11ac(HT40) Channel 151

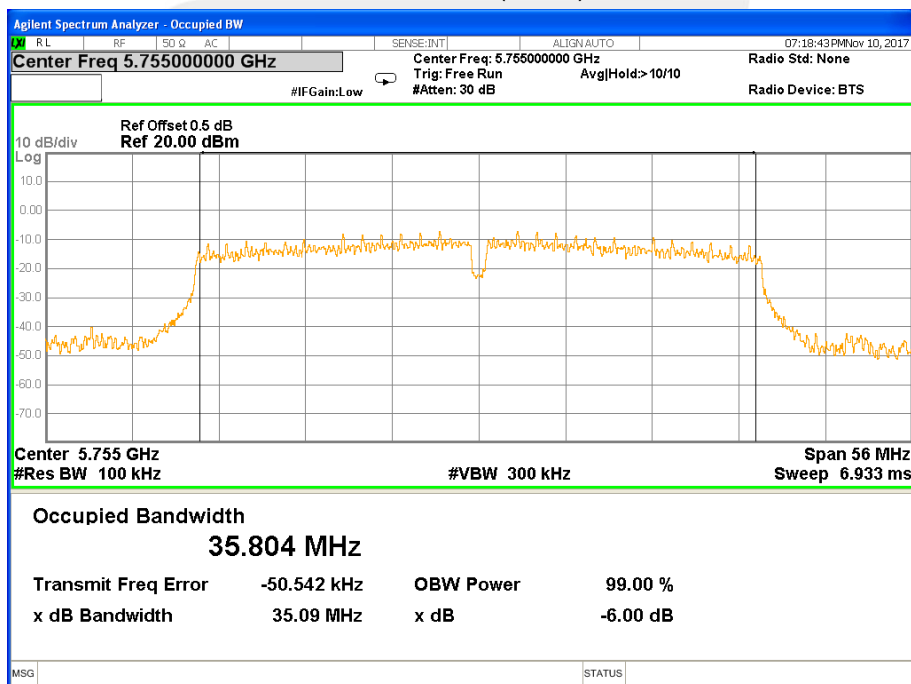




6dBc Bandwidth 802.11ac(HT40) Channel 159

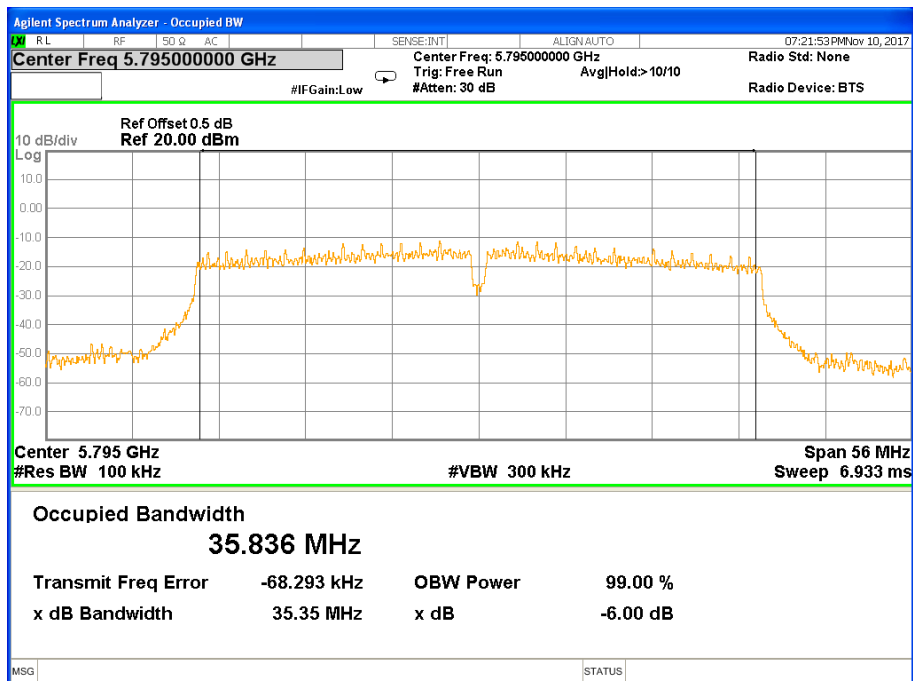

6dBc Bandwidth 802.11ac(HT80) Channel 155

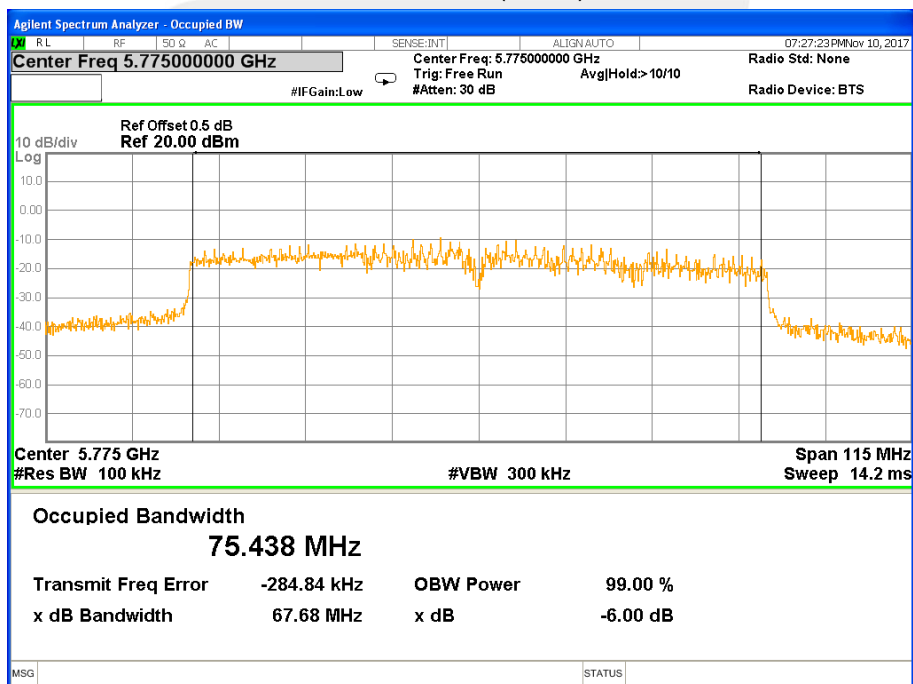



9. MAXIMUM CONDUCTED OUTPUT POWER

9.1 APPLIED PROCEDURES / LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz, If transmitting antennas of directional gain greater than 6 dBi are used.

For the band 5.725-5.85 ghz, the maximum conducted output power over the frequency band of operation shall not exceed 1 w. If transmitting antennas of directional gain greater than 6 dbi are used.

FCC Part15 (15.407) , Subpart E				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.407(a) (3)	Peak Output Power	1 watt	5725-5825	PASS

9.2 TEST PROCEDURE

The EUT was directly connected to the Power Sensor&PC

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.



9.6 TEST RESULTS

Band IV (5.725-5.85GHz)				
Test Channel	Frequency (MHz)	PK Power (dBm)	AV Power (dBm)	LIMIT (dBm)
802.11a				
149	5745	8.23	6.17	30
157	5785	8.10	6.02	30
165	5825	8.51	6.52	30
802.11n(HT20)				
149	5745	7.39	5.290	30
157	5785	7.25	5.530	30
165	5825	7.20	5.590	30
802.11n(HT40)				
151	5755	6.41	4.020	30
159	5795	6.22	3.780	30
802.11ac(HT20)				
149	5745	7.02	4.830	30
157	5785	7.00	4.870	30
165	5825	7.08	4.980	30
802.11ac(HT40)				
151	5755	5.41	3.630	30
159	5795	5.03	3.100	30
802.11ac(HT80)				
155	5775	3.48	1.760	30

Note:

1. For the band 5.745-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W.

10. FREQUENCY STABILITY MEASUREMENT

10.1 LIMIT OF FREQUENCY STABILITY

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an Emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

10.2 MEASURING INSTRUMENTS

See list of measuring instruments of this test report.

10.3 TEST PROCEDURES

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

10.4 TEST SETUP





10.5 TEST RESULTS

NOTE: 1. all bandwidth and mode been test, Only the worst data.

Voltage	Band IV (5.725-5.85GHz) Measurement Frequency(MHz)
AC (V)	5785
MAX	5784.9267
Nom	5784.9247
MIN	5784.9242
Max.Deviation(MHz)	0.0758
Max.Deviation(ppm)	14.58

Temperature Vs. Frequency Stability:

Temperature	Measurement Frequency(MHz)
(°C)	5785
-30	5784.9307
-20	5784.9303
-10	5784.9293
0	5784.9261
10	5784.9259
20	5784.9282
30	5784.9297
40	5784.9294
50	5784.9303
Max.Deviation(MHz)	0.0741
Max.Deviation(ppm)	12.81



11. AUTOMATICALLY DISCONTINUE TRANSMISSION

11.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

11.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission





12. ANTENNA REQUIREMENT

12.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


112 EUT ANTENNA

The EUT antenna is FPC Antenna. It comply with the standard requirement.



APPENDIX - PHOTOS OF TEST SETUP

Radiated Measurement Photos

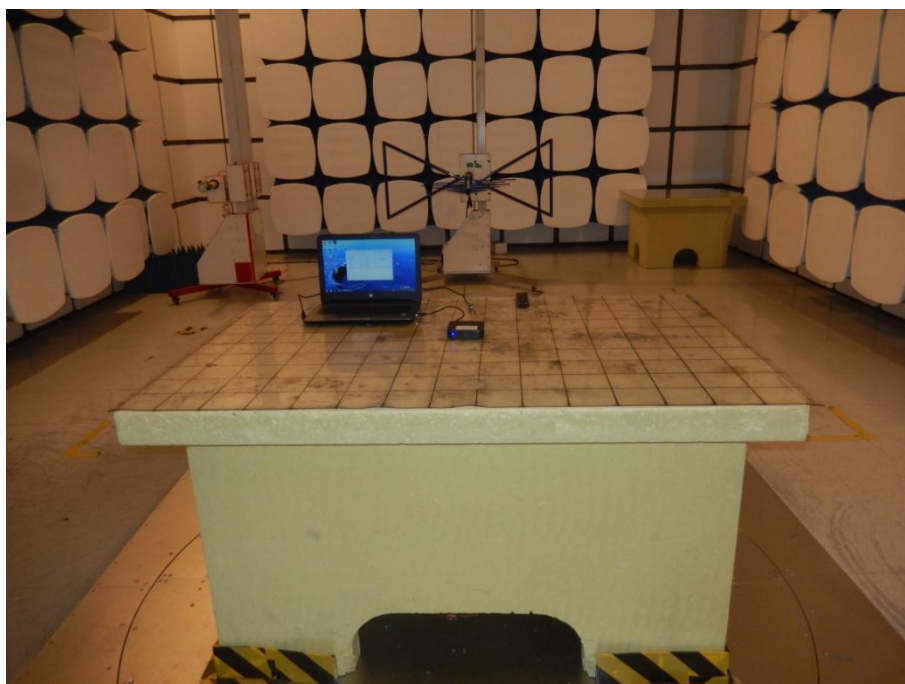

Conducted Measurement Photos



※※※※※END OF THE REPORT※※※※※