


1 COVER PAGE

## TEST REPORT

**Product** : Tracker  
**Trade mark** :   
**Model/Type reference** : MPIP-620  
**Serial Number** : N/A  
**FCC ID** : 2AEPZ-MPIP-620  
**Report Number** : EED32H000248-1  
**Date of Issue:** : May 07, 2015  
**Test Standards** : 47 CFR Part 2(2014)  
47 CFR Part 22 subpart H(2014)  
47 CFR Part 24 subpart E(2014)  
**Test result** : PASS


Prepared for:

**China Aerospace Telecommunications (ShenZhen) Limited**  
9th Floor, East Wing, Building A2, Longma Tech Industry City, Shixin  
Community, Shiyan Street, Baoan, Shenzhen, China


Prepared by:

**Centre Testing International (Shenzhen) Corporation**  
Hongwei Industrial Zone, 70 Area, Bao'an District,  
Shenzhen, Guangdong, China  
**TEL: +86-755-3368 3668**  
**FAX: +86-755-3368 3385**


Tested by:



Reviewed by:



Approved by:

  
Jimmy Li

Date:

May 07, 2015

Lab manager

Check No.: 1727856131



## 2 Version

Version No.	Date	Description
00	2015-03-01	Original

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
<b>GPRS 850</b>			
<b>Conducted output power</b>	Part 2.1046(a)/Part 22.913(a)	ITA-603-C-2004 & KDB 971168 D01v02r02	PASS
<b>Effective Radiated Power of Transmitter(ERP)</b>	Part 2.1046(a)/Part 22.913(a)	ITA-603-C-2004 & KDB 971168 D01v02r02	PASS
<b>99%&amp;26dB Occupied Bandwidth</b>	Part 2.1049(h)	Part 22.917(b) & KDB 971168 D01v02r02	PASS
<b>Band Edge at antenna terminals</b>	Part 2.1051/Part 22.917(a)	Part 22.917(b) & KDB 971168 D01v02r02	PASS
<b>Spurious emissions at antenna terminals</b>	Part 2.1051/ Part 2.1057/ Part 22.917(a)(b )	ITA-603-C-2004 & KDB 971168 D01v02r02	PASS
<b>Field strength of spurious radiation</b>	Part 2.1053/ Part 2.1057/ Part 22.917(a)(b )	ITA-603-C-2004 & KDB 971168 D01v02r02	PASS
<b>Frequency stability</b>	Part 2.1055/ Part 22.355	ITA-603-C-2004 & KDB 971168 D01v02r02	PASS
<b>GPRS 1900</b>			
<b>Conducted output power</b>	Part 2.1046(a) /Part 24.232(c)	ITA-603-C-2004& KDB 971168 D01v02r02	PASS
<b>Effective Radiated Power of Transmitter(EIRP)</b>	Part 2.1046(a) / Part 24.232(c)	ITA-603-C-2004 & KDB 971168 D01v02r02	PASS
<b>peak-to-average ratio</b>	Part 24.232(d)	KDB 971168 D01v02r02	PASS
<b>99% &amp;26dB Occupied Bandwidth</b>	Part 2.1049(h)	Part 24.238(b) & KDB 971168 D01v02r02	PASS
<b>Band Edge at antenna terminals</b>	Part 2.1051/ Part 24.238(a)	Part 24.238(b) & KDB 971168 D01v02r02	PASS
<b>Spurious emissions at antenna terminals</b>	Part 2.1051/ Part 2.1057/ Part 24.238(a)(b)	ITA-603-C-2004 & KDB 971168 D01v02r02	PASS
<b>Field strength of spurious radiation</b>	Part 2.1053 /Part 2.1057 / Part 24.238(a)(b)	ITA-603-C-2004 & KDB 971168 D01v02r02	PASS
<b>Frequency stability</b>	Part 2.1055/Part 24.235	ITA-603-C-2004 & KDB 971168 D01v02r02	PASS

Remark:

Tx: In this whole report Tx (or tx) means transmitter.

Rx: In this whole report Rx (or rx) means receiver.

LCH: In this whole report LCH means low channel.

MCH: In this whole report LCH means middle channel.

HCH: In this whole report LCH means high channel.

VL: In this whole report Volt means low voltage. (DC 9V)

VN: In this whole report Volt means normal voltage. (DC 12V)

VH: In this whole report Volt means high voltage. (DC 36V)

TN: In this whole report Temp means normal temperature. (25°C)

Humid: In this whole report Humid means humidity.

N/A: In this whole report not application.


## 4 Content

1	.....	1
2	VERSION .....	2
3	TEST SUMMARY .....	3
4	CONTENT .....	4
5	TEST REQUIREMENT .....	5
5.1	TEST SETUP .....	5
5.1.1	For Conducted test setup .....	5
5.1.2	For Radiated Emissions test setup .....	5
5.2	TEST ENVIRONMENT .....	6
5.3	TEST CONDITION .....	6
6	GENERAL INFORMATION .....	7
6.1	CLIENT INFORMATION .....	7
6.2	GENERAL DESCRIPTION OF EUT .....	7
6.3	PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD .....	7
6.4	DESCRIPTION OF SUPPORT UNITS .....	7
6.5	TEST LOCATION .....	7
6.6	TEST FACILITY .....	8
6.7	DEVIATION FROM STANDARDS .....	9
6.8	ABNORMALITIES FROM STANDARD CONDITIONS .....	9
6.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	9
7	EQUIPMENT LIST .....	10
8	RADIO TECHNICAL REQUIREMENTS SPECIFICATION .....	11
	Appendix A) RF Power Output .....	12
	Appendix B) Peak-to-Average Ratio .....	14
	Appendix C) BandWidth .....	15
	Appendix D) Band Edges Compliance .....	19
	Appendix E) Spurious Emission at Antenna Terminal .....	21
	Appendix F) Frequency Stability .....	36
	Appendix G) Effective Radiated Power of Transmitter (ERP/EIRP) .....	39
	Appendix H) Field strength of spurious radiation .....	41
	PHOTOGRAPHS OF TEST SETUP .....	44
	PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS .....	45

## 5 Test Requirement

### 5.1 Test setup

#### 5.1.1 For Conducted test setup

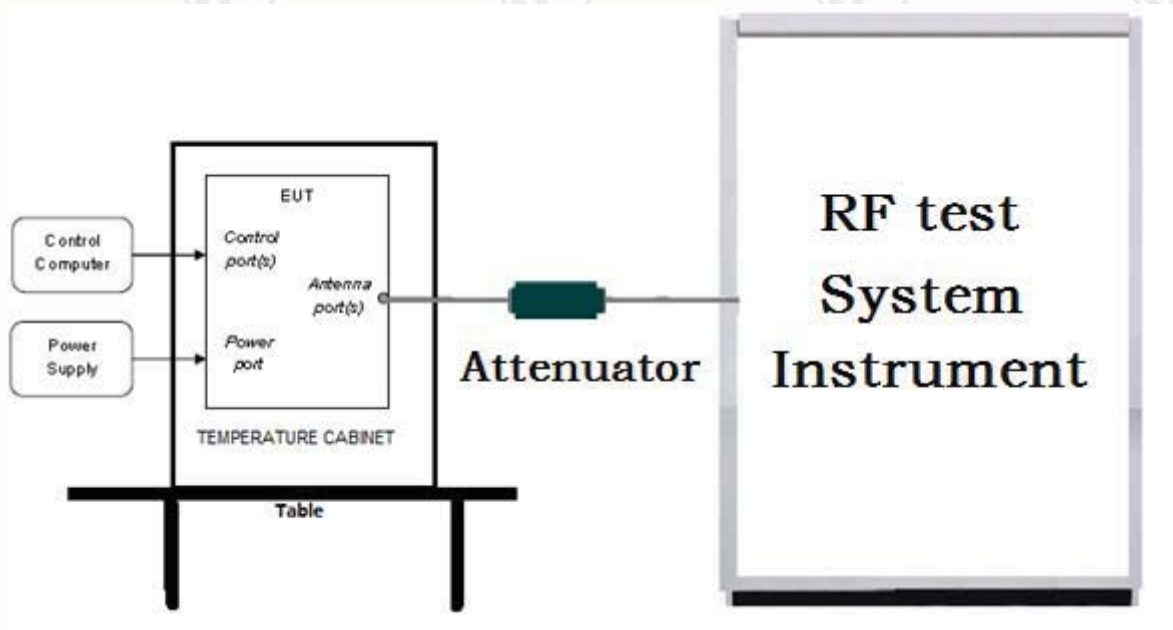

#### 5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

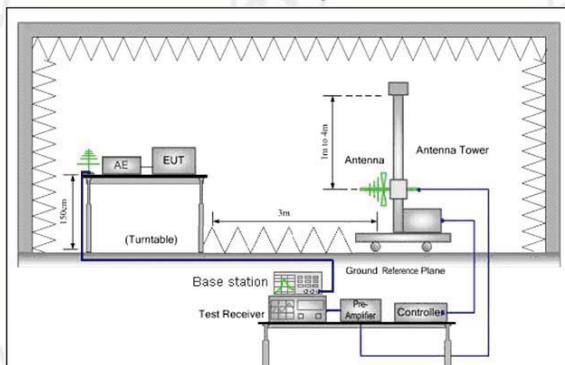


Figure 1. 30MHz to 1GHz

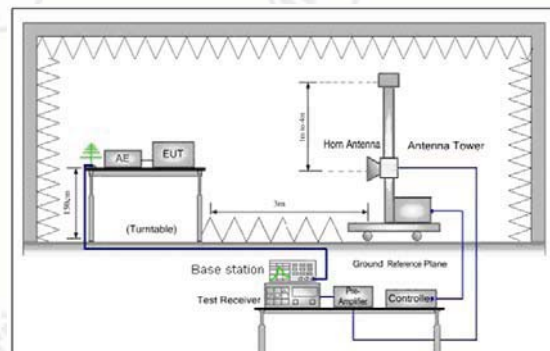


Figure 2. above 1GHz

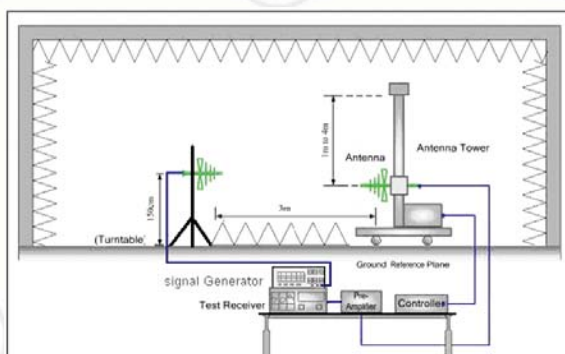


Figure 1. 30MHz to 1GHz

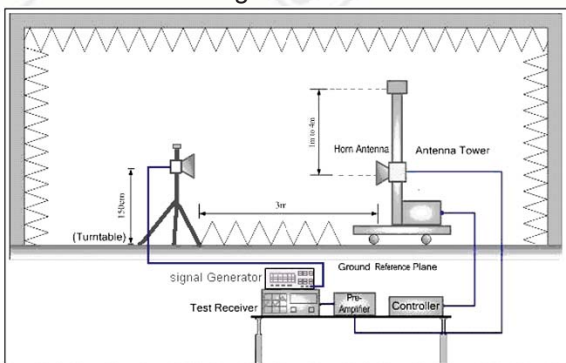


Figure 2. above 1GHz

## 5.2 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	53 % RH
Atmospheric Pressure:	995mbar

## 5.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GPRS850	Tx ( 824 MHz ~849 MHz )	Channel 128	Channel 190	Channel 251
		824.2MHz	836.6 MHz	848.8 MHz
	Rx ( 869 MHz ~894 MHz )	Channel 128	Channel 190	Channel 251
		869.2 MHz	881.6 MHz	893.8 MHz
GPRS1900	Tx ( 1850 MHz ~1910 MHz )	Channel 512	Channel 661	Channel 810
		1850.2MHz	1880.0 MHz	1909.8 MHz
	Rx ( 1930 MHz ~1990 MHz )	Channel 512	Channel 661	Channel 810
		1930.2 MHz	1960.0 MHz	1989.8 MHz

Test mode:

Pre-scan under all rate at lowest middle and highest channel, find the transmitter power as below:

Conducted transmitter power measurement result.

band	GPRS850			GPRS1900		
Channel	128	190	251	512	661	810
Frequency(MHz)	824.2MHz	836.6MHz	848.8MHz	1850.2MHz	1880MHz	1909.8MHz
GPRS Class 8	33.03dBm	32.95dBm	32.75dBm	27.52dBm	27.78dBm	27.99dBm
GPRS Class 10	32.53dBm	32.43dBm	32.51dBm	27.41dBm	27.57dBm	27.67dBm
GPRS Class 11	32.23dBm	32.21dBm	31.83dBm	27.39dBm	27.54dBm	27.56dBm
GPRS Class 12	32.03dBm	32.11dBm	31.93dBm	27.33dBm	27.50dBm	27.34dBm

Pre-scan all mode and data rates and positions, find worse case mode are chosen to the report ,the worse case mode as below:


band	Radiated	Conducted
GPRS850	GPRS 8 Link	GPRS 8 Link
GPRS1900	GPRS 8 Link	GPRS 8 Link

## 6 General Information

### 6.1 Client Information

Applicant:	China Aerospace Telecommunications (ShenZhen) Limited
Address of Applicant:	9th Floor, East Wing, Building A2, Longma Tech Industry City, Shixin Community, Shiyan Street, Baoan, Shenzhen, China
Manufacturer:	China Aerospace Telecommunications (ShenZhen) Limited
Address of Manufacturer:	9th Floor, East Wing, Building A2, Longma Tech Industry City, Shixin Community, Shiyan Street, Baoan, Shenzhen, China

### 6.2 General Description of EUT

Product Name:	Tracker
Model No.(EUT):	MPIP-620
Trade Mark:	
EUT Supports Radios application	GPRS900,GPRS1800
Power Supply:	Input: 9-36V --- 250mA, Class III, IPX0
Sample Received Date:	Mar. 13, 2015
Sample tested Date:	Mar. 13, 2015 to May 06, 2015

### 6.3 Product Specification subjective to this standard

Frequency Band:	GPRS850: Tx:824.20 -848.80MHz; Rx: 869.20 – 893.80MHz GPRS1900: Tx:1850.20 – 1909.80MHz; Rx:1930.20 – 1989.80MHz
Modulation Type:	GMSK
SIM	IEMI: 358888021162413
Power class	3
Sample Type:	fixed production
Antenna Type and Gain:	Type: temporary antenna Gain:0dBi
Test Voltage:	DC 12V

### 6.4 Description of Support Units

The EUT has been tested independently.

### 6.5 Test Location

All tests were performed at:

Centre Testing International (Shenzhen) Corporation Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 3368 3668 Fax:+86 (0) 755 3368 3385

No tests were sub-contracted.

## 6.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### **CNAS-Lab Code: L1910**

Centre Testing International (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories. .

### **A2LA-Lab Cert. No. 3061.01**

Centre Testing International (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### **FCC-Registration No.: 756231**

Centre Testing International (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 756231.

### **IC-Registration No.: 7408A**

The 3m Alternate Test Site of Centre Testing International (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A .

### **IC-Registration No.: 7408B**

The 10m Alternate Test Site of Centre Testing International (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B.

### **NEMKO-Aut. No.: ELA503**

Centre Testing International (Shenzhen) Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

### **VCCI**

The Radiation 3 & 10 meters site of Centre Testing International (Shenzhen) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Main Ports Conducted Interference Measurement of Centre Testing International (Shenzhen) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of Centre Testing International (Shenzhen) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International (Shenzhen) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

## 6.7 Deviation from Standards

None.

## 6.8 Abnormalities from Standard Conditions

None.

## 6.9 Other Information Requested by the Customer

None.

## 7 Equipment List

RF Test Equipments				
Equipment	Manufacturer	Model	Serial No.	Due Date
Spectrum Analyzer	Agilent	E4440A	MY46185649	08/03/2015
Signal Generator	Agilent	E4438C	MY45095744	08/03/2015
Communication test set	Agilent	E5515C	GB47050533	08/03/2015
Signal Generator	Keysight	E8257D	N/A	08/03/2015
Communication test set	Agilent	E5515C	GB47050533	08/03/2015
Temperature & Humidity Chamber	ESPEC	EL-04KA	N/A	08/03/2015
High-pass filter(3-18GHz)	Sinoscite	FL3CX03WG18NM 12-0398-002	N/A	08/03/2015
High-pass filter(5-18GHz)	MICRO-TRONICS	SPA-F-63029-4	N/A	08/03/2015
band rejection filter (GSM900)	Sinoscite	FL5CX01CA09CL1 2-0395-001	N/A	08/03/2015
band rejection filter (GSM850)	Sinoscite	FL5CX01CA08CL1 2-0393-001	N/A	08/03/2015
band rejection filter (GSM1800)	Sinoscite	FL5CX02CA04CL1 2-0396-002	N/A	08/03/2015
band rejection filter (GSM1900)	Sinoscite	FL5CX02CA03CL1 2-0394-001	N/A	08/03/2015
DC Power	Keysight	E3642A	N/A	08/03/2015
Communication Automatic control	JS Tonscend	JS0806-1	N/A	08/03/2015
LTE Automatic test software	JS Tonscend	JSTS1120-1	N/A	08/03/2015
WCDMA Automatic test software	JS Tonscend	JSTS1120-3	N/A	08/03/2015
GSM Automatic test software	JS Tonscend	JSTS1120-3	N/A	08/03/2015
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06/01/2016
Receiver	R&S	ESCI	100435	07/08/2015
Spectrum Analyzer	R&S	FSP40	100416	07/06/2015
Signal Generator	R&S	SMB 100A	3008A02145	01/15/2016
Vector Signal Generator	R&S	SMBV 100A	3636A01004	01/15/2016
Signal Analyzer	R&S	FSV	100263	01/15/2016
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	618	06/17/2015
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	617	07/13/2015
Multi device Controller	maturo	NCD/070/1071111 2	---	N/A
Horn Antenna	ETS-LINGREN	3117	00057407	07/07/2015
Horn Antenna	ETS-LINGREN	3117	00057362	07/07/2015
Microwave Preamplifier	Agilent	8449B	3008A02425	03/19/2016

## 8 Radio Technical Requirements Specification

### Reference documents for testing:

No.	Identity	Document Title
1	PART 22 (2014)	PART 22 – PUBLIC MOBILE SERVICES Subpart H – Cellular Radiotelephone Service
2	PART 24 (2014)	PART 24 – PERSONAL COMMUNICATIONS SERVICES Subpart E – Broadband PCS
3	PART 2 (2014)	Frequency allocations and radio treaty matters; general rules and regulations
4	TIA-603-C-2004	Land Mobile FM or PM - Communications Equipment -Measurement and Performance Standards
5	KDB971168 D01	KDB971168 D01 Power Meas License Digital Systems v02r02

### Test Results List:

Test Requirement	Test method	Test item	Verdict	Note
Part 2.1046(a)/Part 22.913(a)/ part 24.232(c)	ITA-603-C& KDB 971168 D01v02r02	Conducted output power	PASS	Appendix A)
Part 24.232(d)	KDB 971168 D01v02r02	peak-to-average ratio	PASS	Appendix B)
Part 2.1049(h)	Part 22.917(b)/ Part 24.238(b) & KDB 971168 D01v02r02	99% &26dB Occupied Bandwidth	PASS	Appendix C)
Part 2.1051/Part 22.917(a)/ Part 24.238(a)	Part 22.917(b)/ Part 24.238(b) & KDB 971168 D01v02r02	Band Edge at antenna terminals	PASS	Appendix D)
Part 2.1051/ Part 2.1057/ Part 22.917(a)(b)/ Part 24.238(a)(b)	ITA-603-C & KDB 971168 D01v02r02	Spurious emissions at antenna terminals	PASS	Appendix E)
Part 2.1055/ Part 22.355/ Part 24.235	ITA-603-C & KDB 971168 D01v02r02	Frequency stability	PASS	Appendix F)
Part 2.1053/ Part 2.1057/ Part 22.917(a)(b)/ Part 24.238(a)(b)	ITA-603-C & KDB 971168 D01v02r02	Field strength of spurious radiation	PASS	Appendix G)
Part 2.1046(a)/Part 22.913(a)/ Part 24.232(c)	ITA-603-C & KDB 971168 D01v02r02	Effective Radiated Power of Transmitter(ERP)	PASS	Appendix H)

Test Mode	Test Modes description
GPRS/TM2	GPRS,GMSK modulation

## Appendix A) RF Power Output

GPRS Class 8:

Test Band	Test Mode	Test Channel	Measured (dBm)	Limit (dBm)	Verdict
GPRS850	GPRS/TM2	LCH	33.03	38.45	PASS
		MCH	32.95	38.45	PASS
		HCH	32.75	38.45	PASS

Test Band	Test Mode	Test Channel	Measured (dBm)	Limit (dBm)	Verdict
GPRS1900	GPRS/TM2	LCH	27.52	33.01	PASS
		MCH	27.78	33.01	PASS
		HCH	27.99	33.01	PASS

GPRS Class 10:

Test Band	Test Mode	Test Channel	Measured (dBm)	Limit (dBm)	Verdict
GPRS850	GPRS/TM2	LCH	32.53	38.45	PASS
		MCH	32.43	38.45	PASS
		HCH	32.51	38.45	PASS

Test Band	Test Mode	Test Channel	Measured (dBm)	Limit (dBm)	Verdict
GPRS1900	GPRS/TM2	LCH	27.41	33.01	PASS
		MCH	27.57	33.01	PASS
		HCH	27.67	33.01	PASS

## GPRS Class 11:

Test Band	Test Mode	Test Channel	Measured (dBm)	Limit (dBm)	Verdict
GPRS850	GPRS/TM2	LCH	32.23	38.45	PASS
		MCH	32.21	38.45	PASS
		HCH	31.83	38.45	PASS

Test Band	Test Mode	Test Channel	Measured (dBm)	Limit (dBm)	Verdict
GPRS1900	GPRS/TM2	LCH	27.39	33.01	PASS
		MCH	27.54	33.01	PASS
		HCH	27.56	33.01	PASS

## GPRS Class 12:

Test Band	Test Mode	Test Channel	Measured (dBm)	Limit (dBm)	Verdict
GPRS850	GPRS/TM2	LCH	32.03	38.45	PASS
		MCH	32.11	38.45	PASS
		HCH	31.93	38.45	PASS

Test Band	Test Mode	Test Channel	Measured (dBm)	Limit (dBm)	Verdict
GPRS1900	GPRS/TM2	LCH	27.33	33.01	PASS
		MCH	27.50	33.01	PASS
		HCH	27.34	33.01	PASS

## Appendix B) Peak-to-Average Ratio

Test Band	Test Mode	Test Channel	Measured (dBm)	Limit (dBm)	Verdict
GPRS1900	GPRS/TM2	LCH	7.80	13	PASS
		MCH	7.73	13	PASS
		HCH	11.42	13	PASS

## Appendix C) BandWidth

Test Band	Test Mode	Test Channel	99% Bandwidth (kHz)	26dB Bandwidth (kHz)	Verdict
GPRS850	GPRS/TM2	LCH	248.14	318.90	PASS
		MCH	242.83	316.63	PASS
		HCH	241.58	318.61	PASS

Test Band	Test Mode	Test Channel	99% Bandwidth (kHz)	26dB Bandwidth (kHz)	Verdict
GPRS1900	GPRS/TM2	LCH	251.46	313.82	PASS
		MCH	260.93	320.40	PASS
		HCH	223.41	303.56	PASS

Test Band=GPRS850

Test Mode=GPRS/TM2

Test Channel=LCH



Test Channel=MCH




**Test Channel=HCH**



**Test Band=GPRS1900**

**Test Mode=GPRS/TM2**


**Test Channel=LCH**

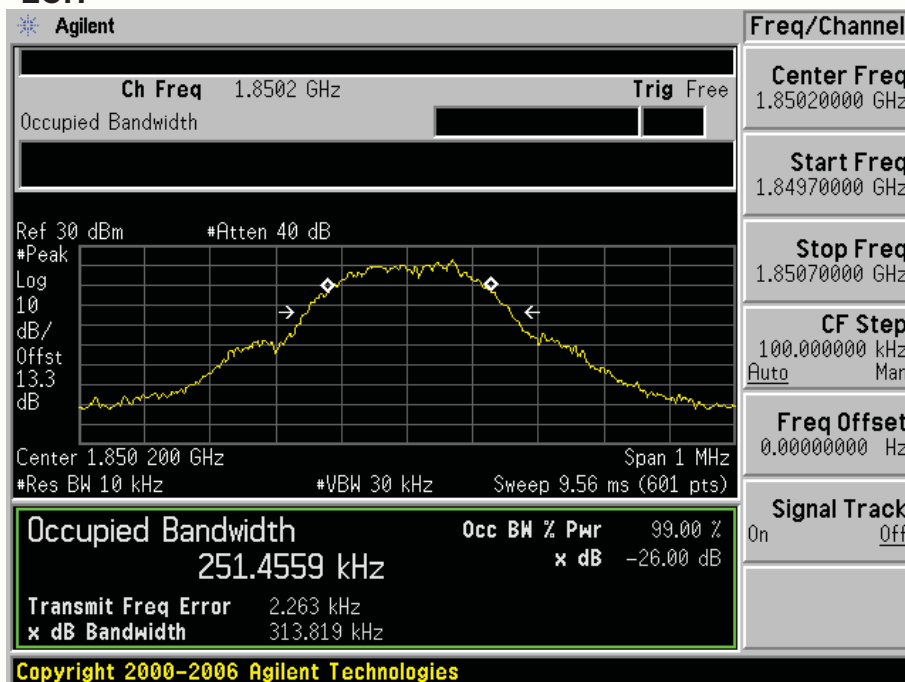

**Test Channel=MCH**



**Test Channel=HCH**

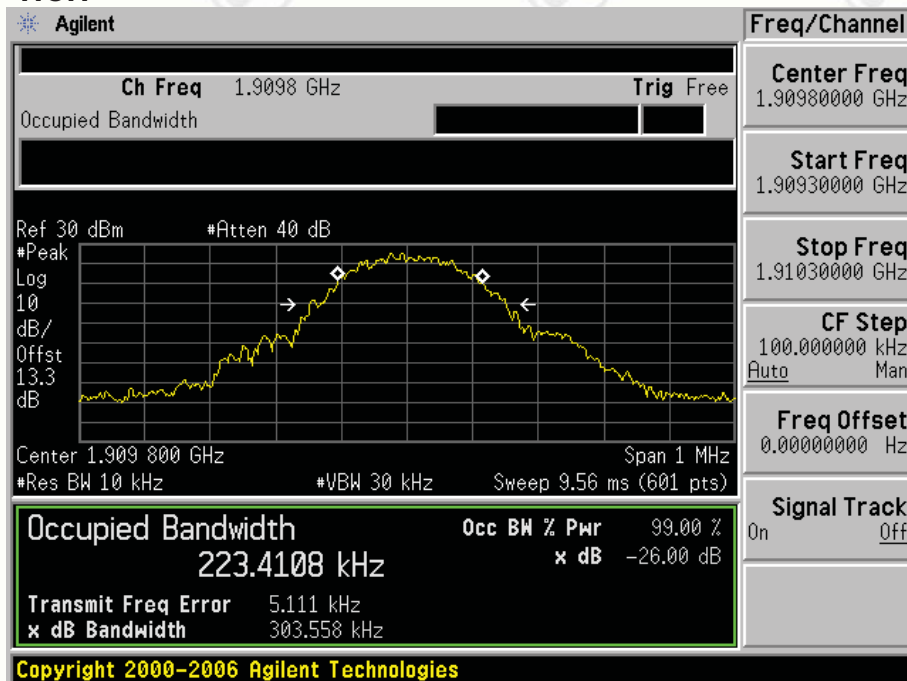


## Appendix D) Band Edges Compliance


Test Band=GPRS850

Test Mode=GPRS/TM2

Test Channel=LCH

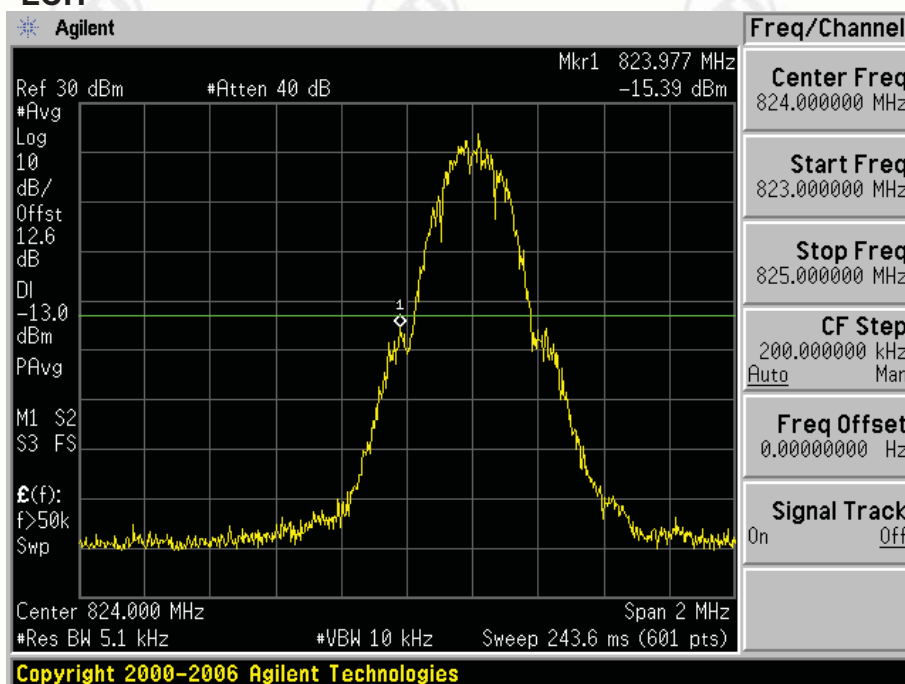


Test Channel=HCH

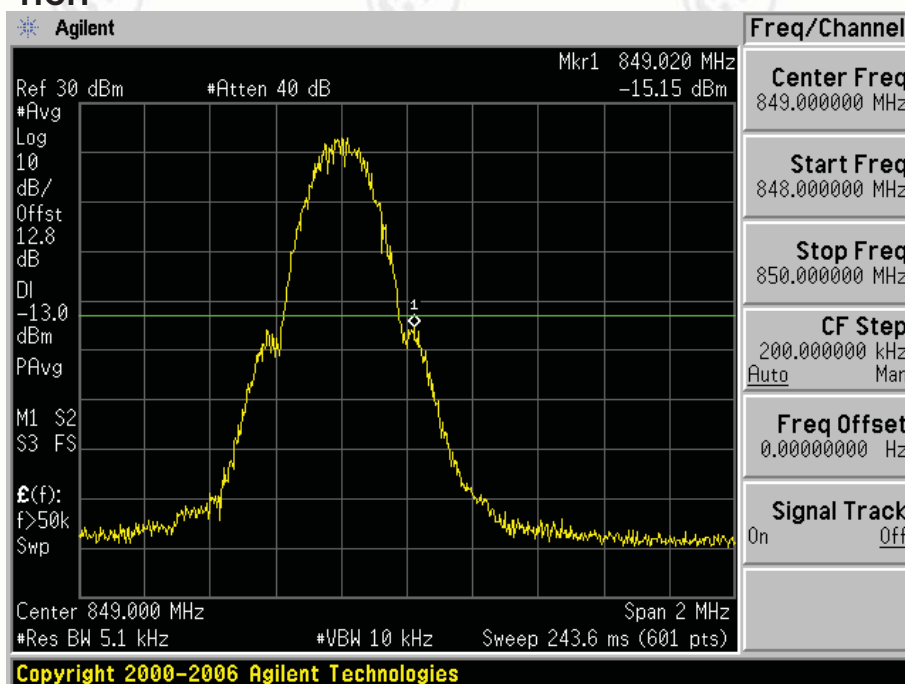


Test Band=GPRS1900

Test Mode=GPRS/TM2

Test Channel=LCH

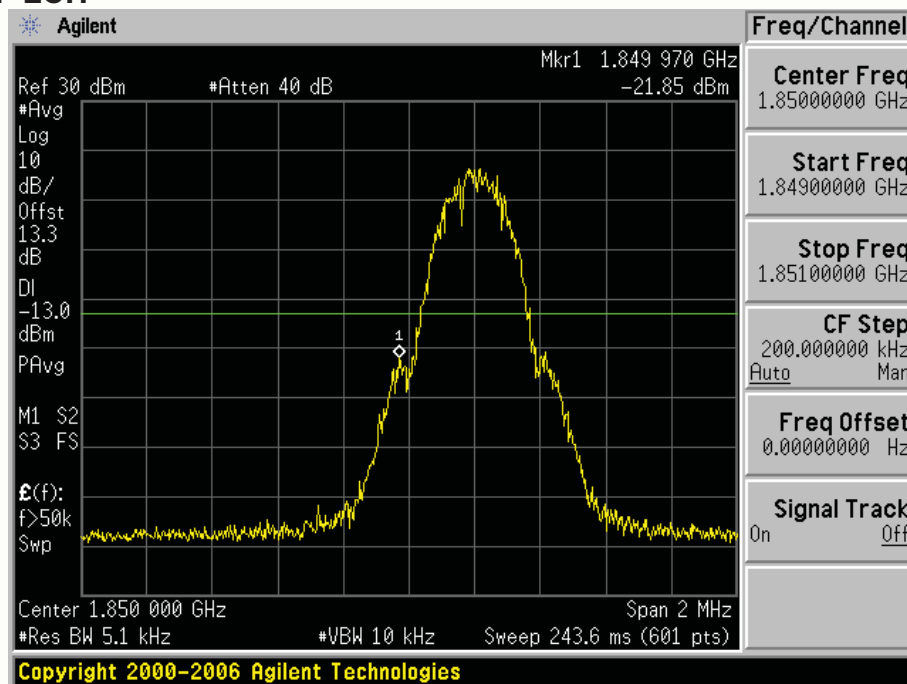

Test Channel=HCH


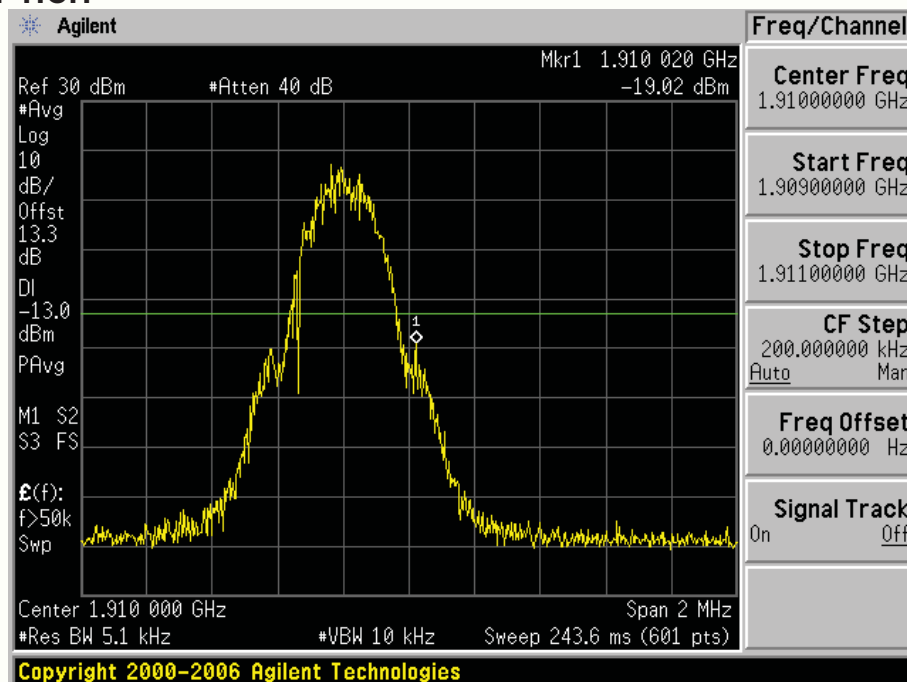




## Appendix E) Spurious Emission at Antenna Terminal

Test Band=GPRS850



Test Mode=GPRS/TM2



Test Channel=LCH

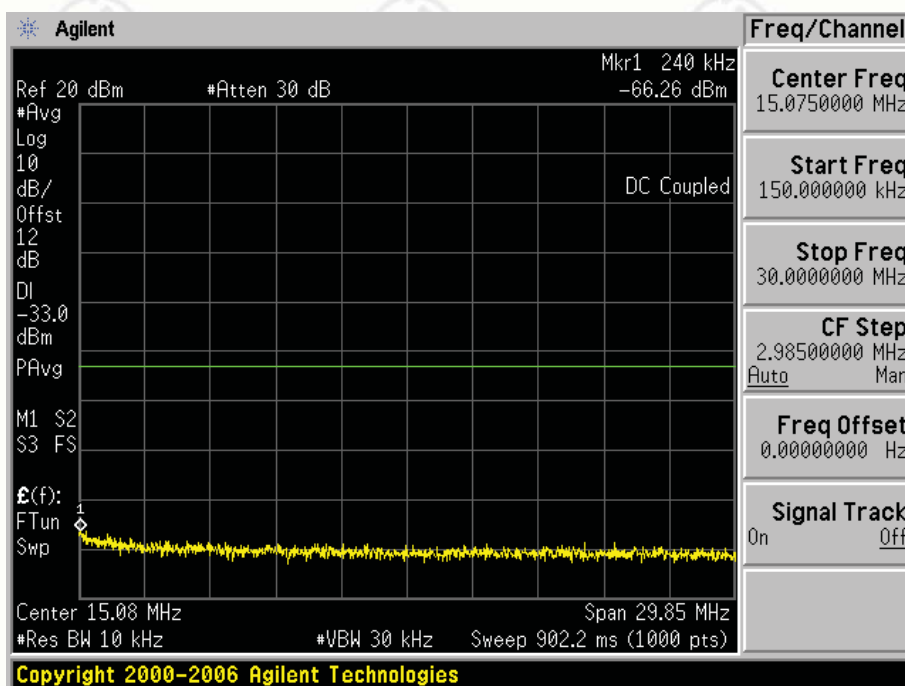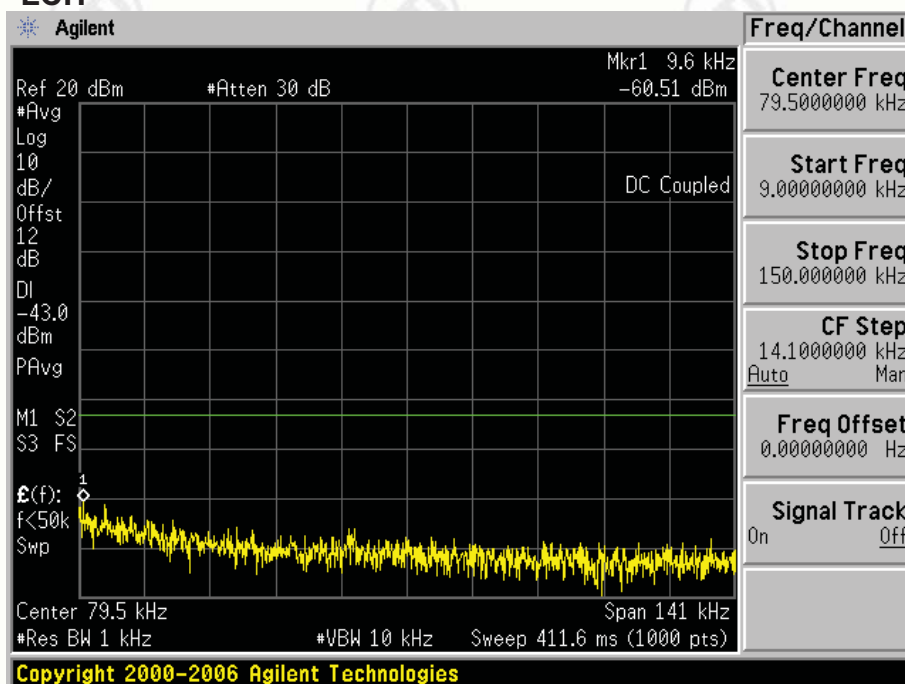

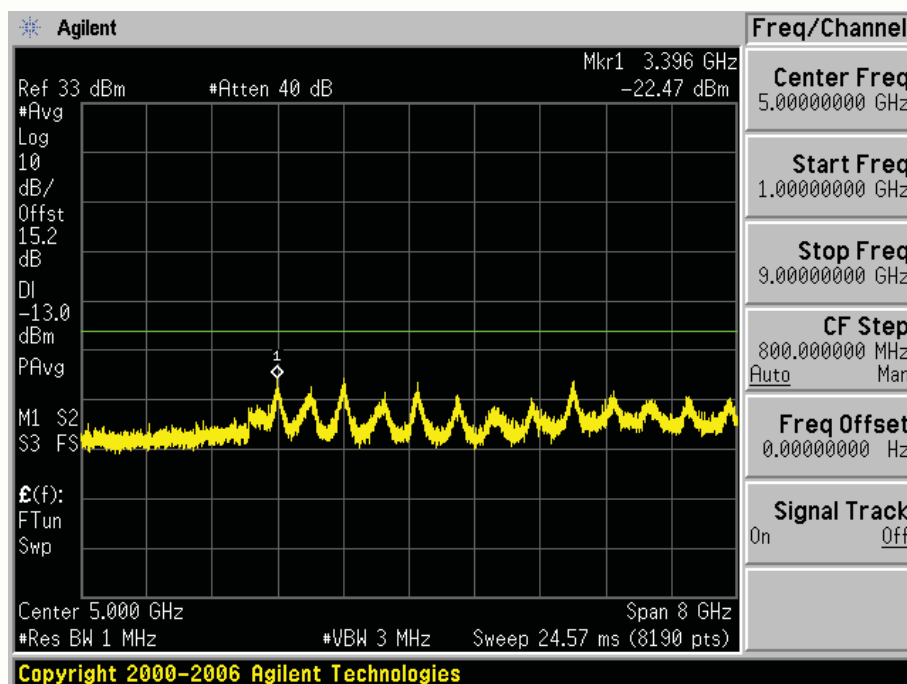
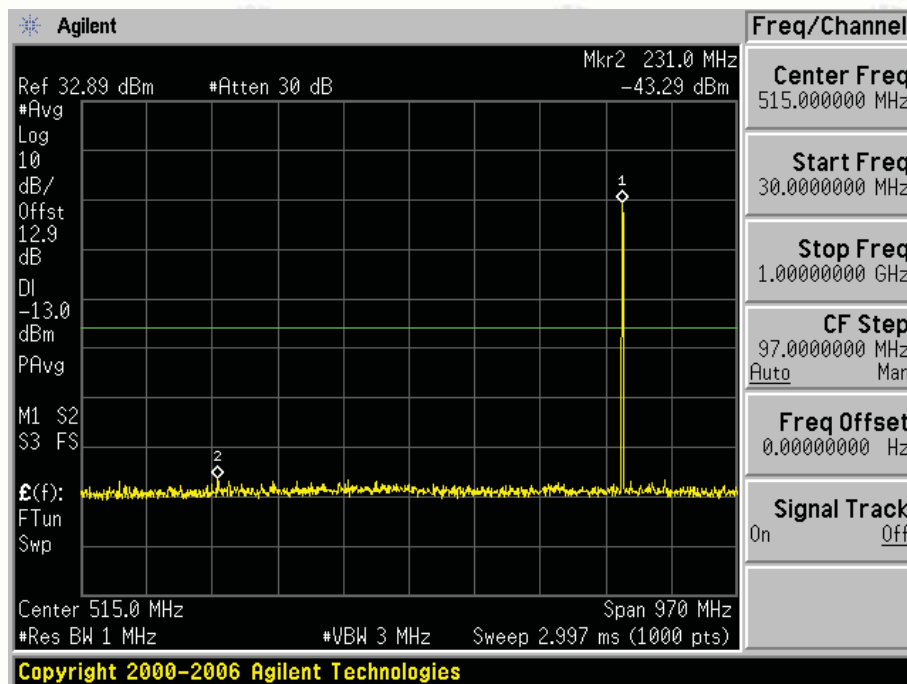




**Test Channel=MCH**

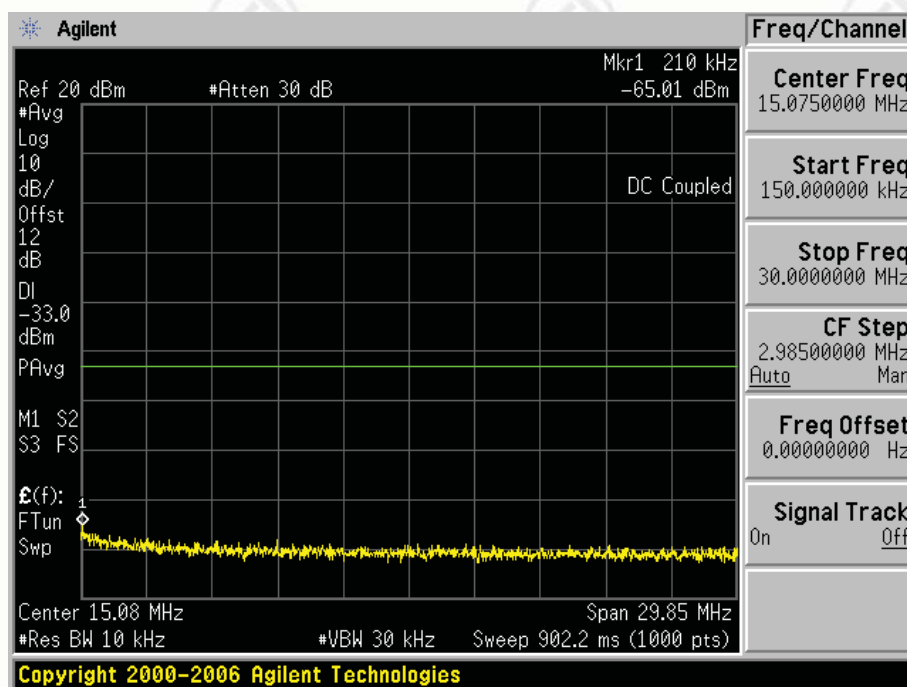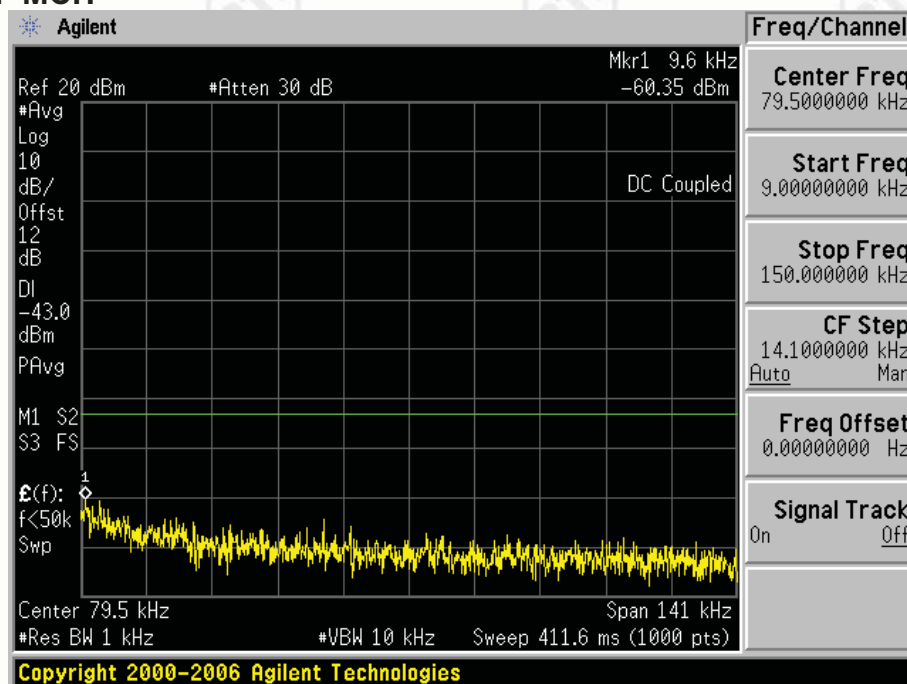

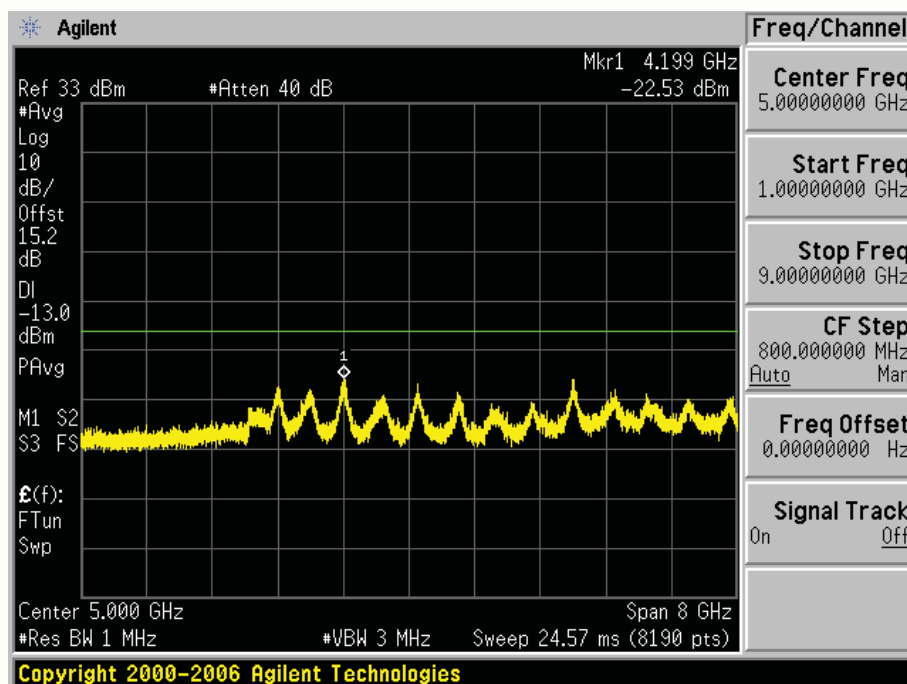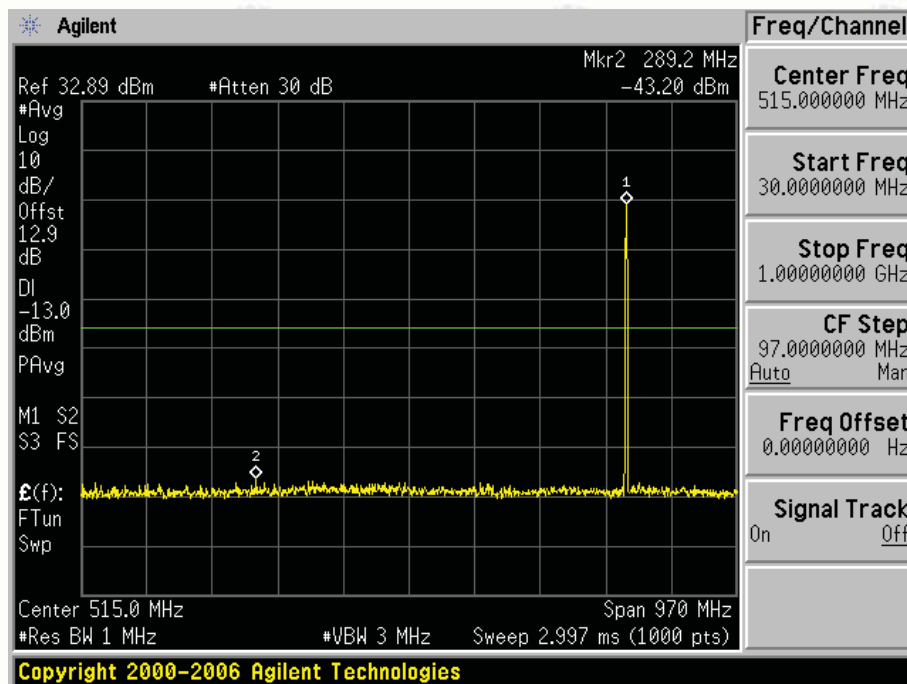

Test Channel=HCH

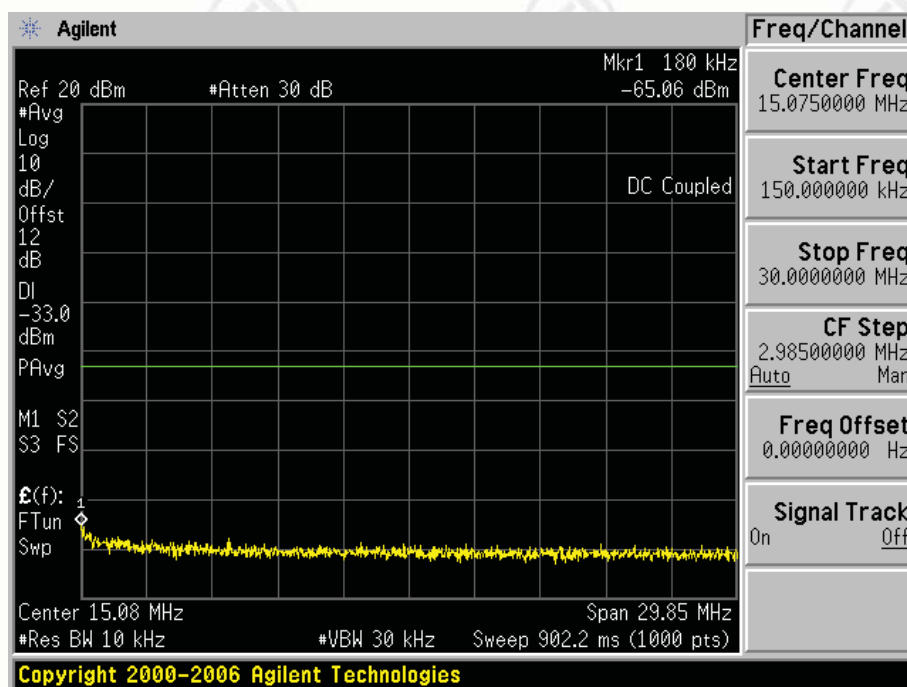
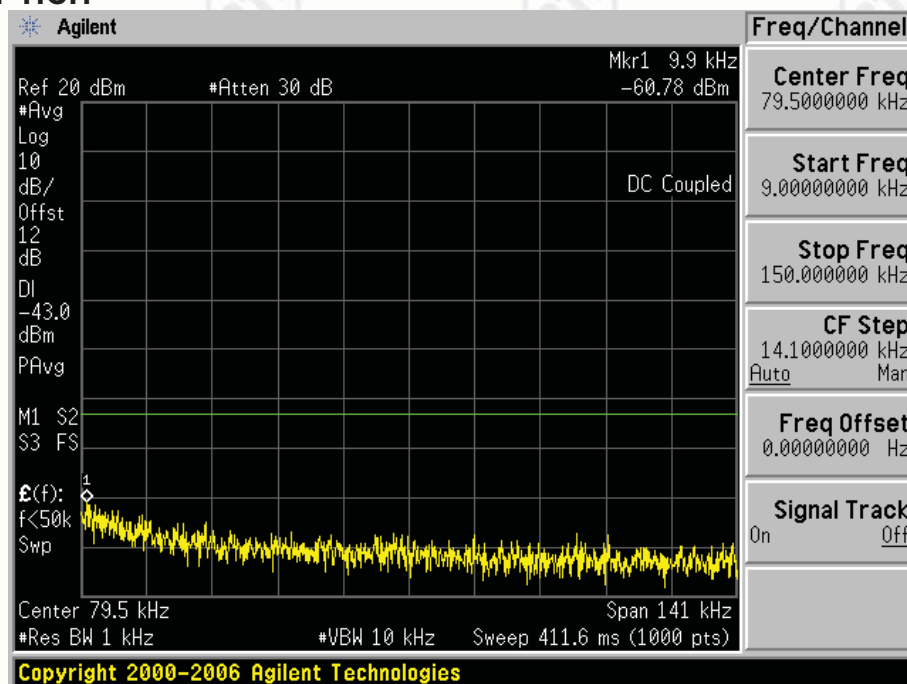


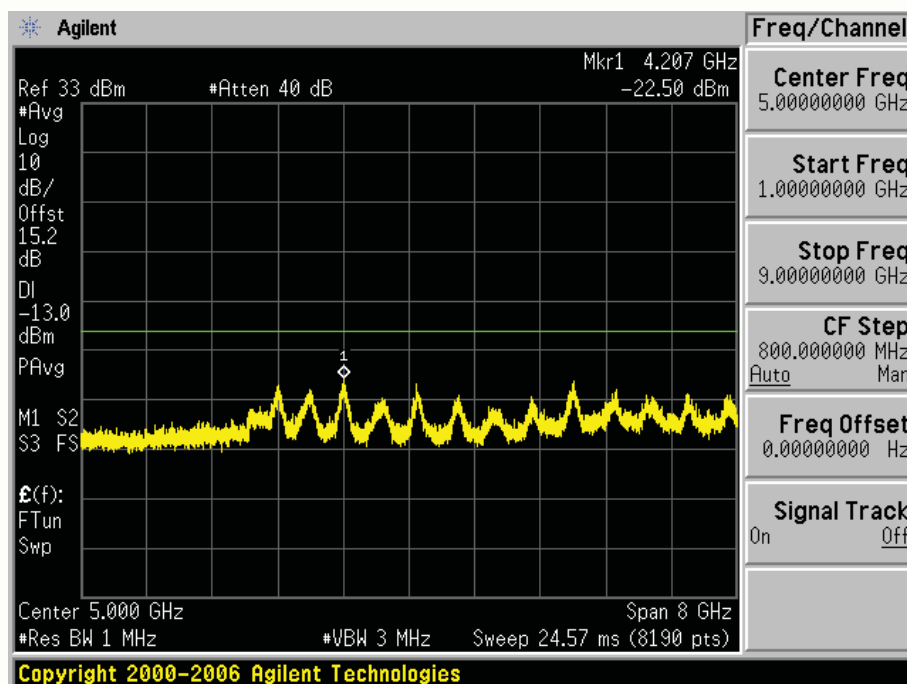
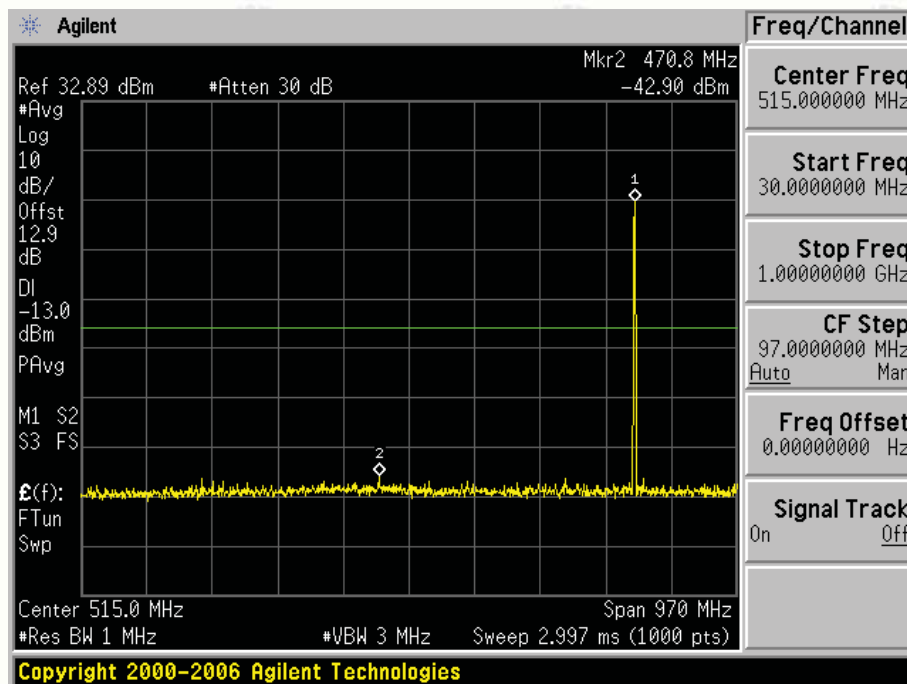




Test Band=GPRS1900

Test Mode=GPRS/TM2



Test Channel=LCH

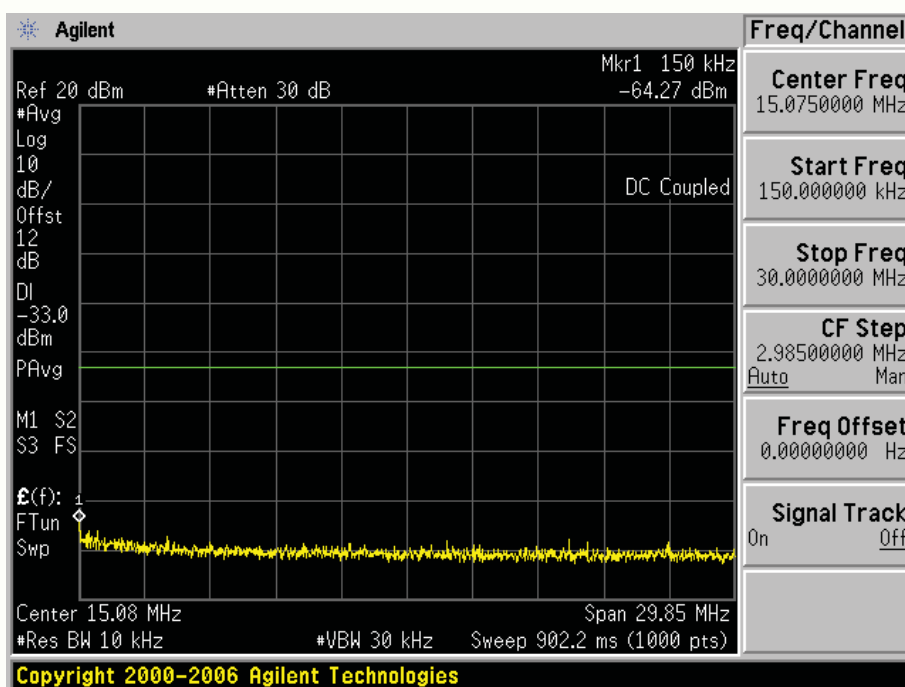
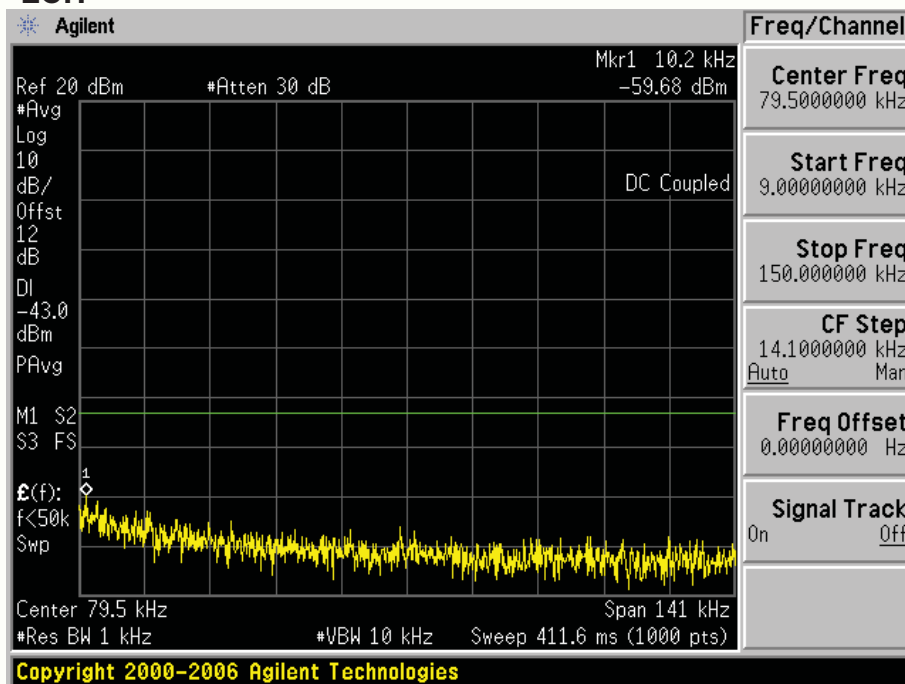


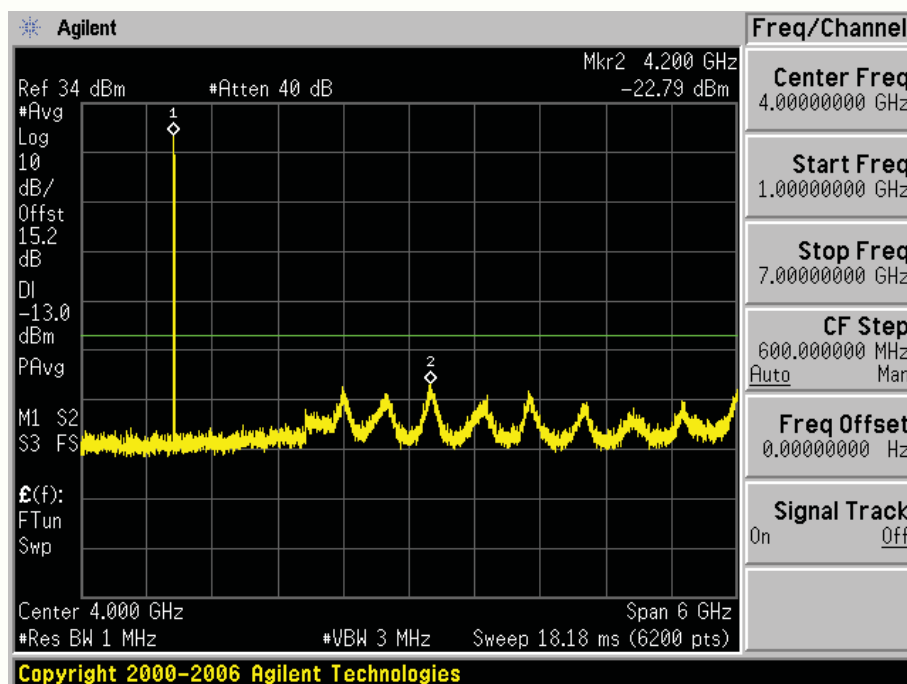
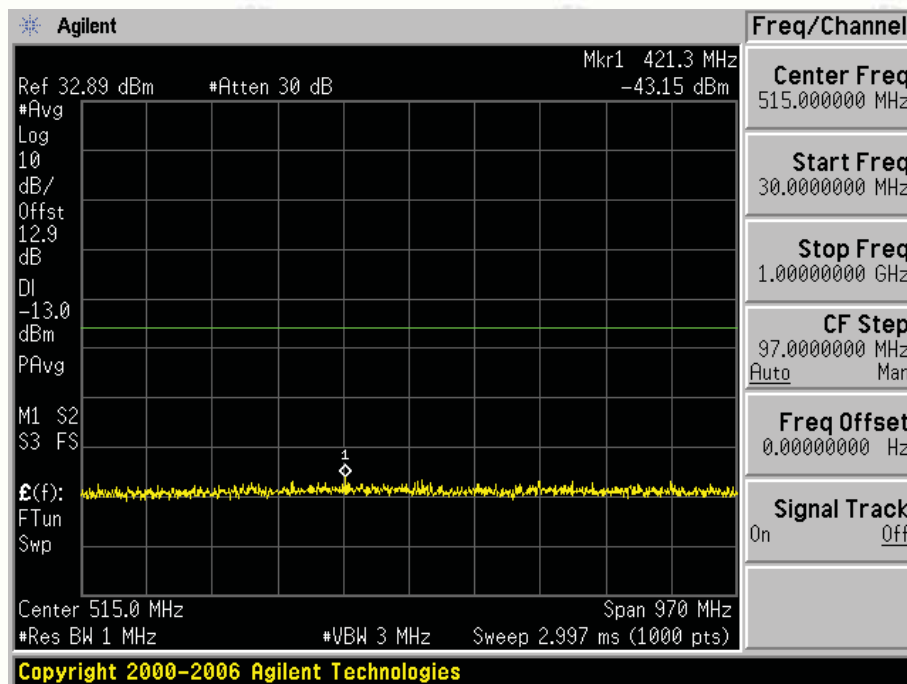


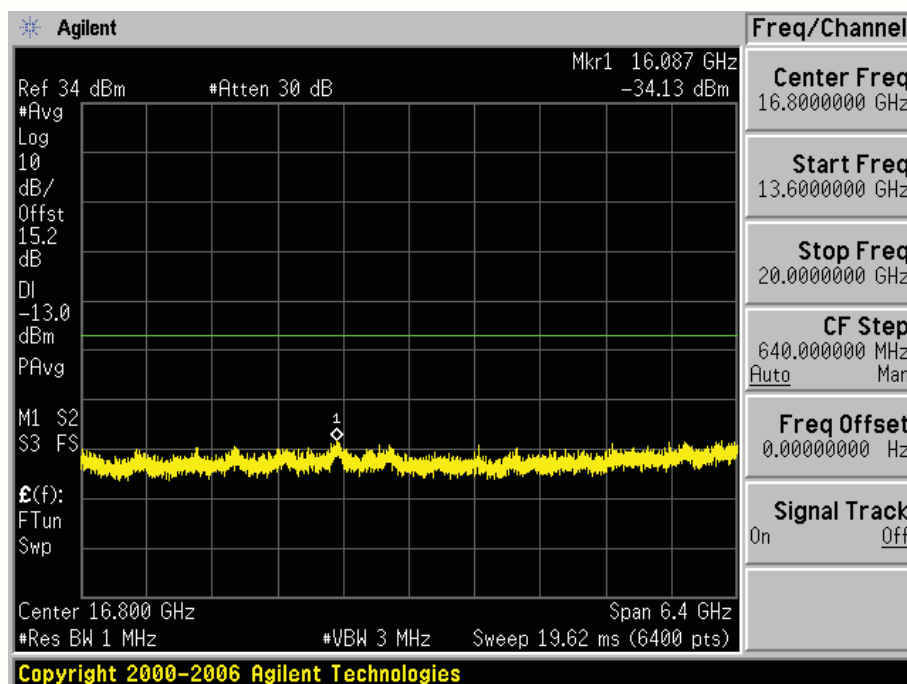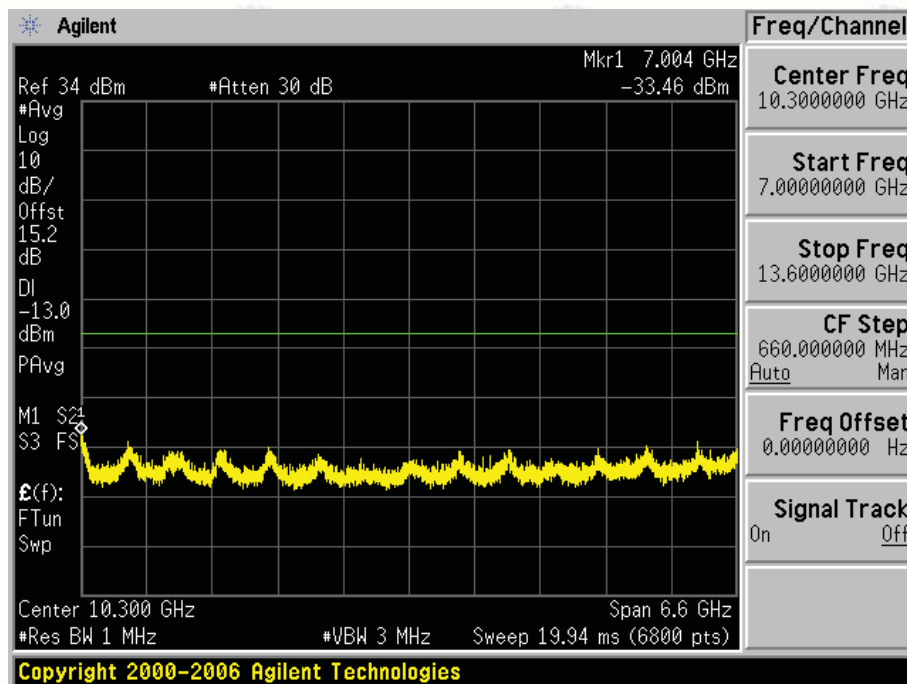



**Test Channel=MCH**

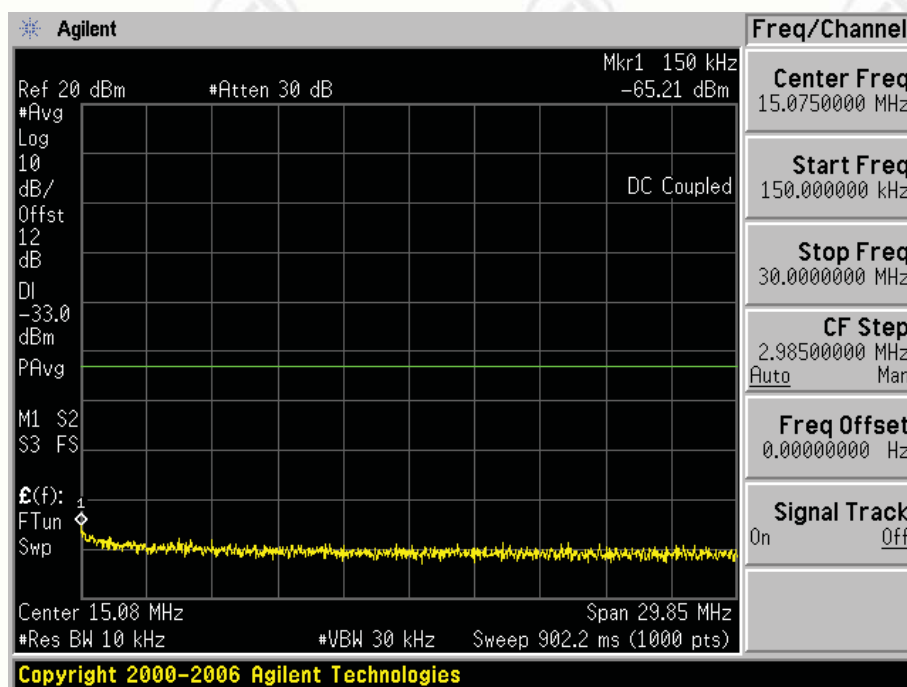
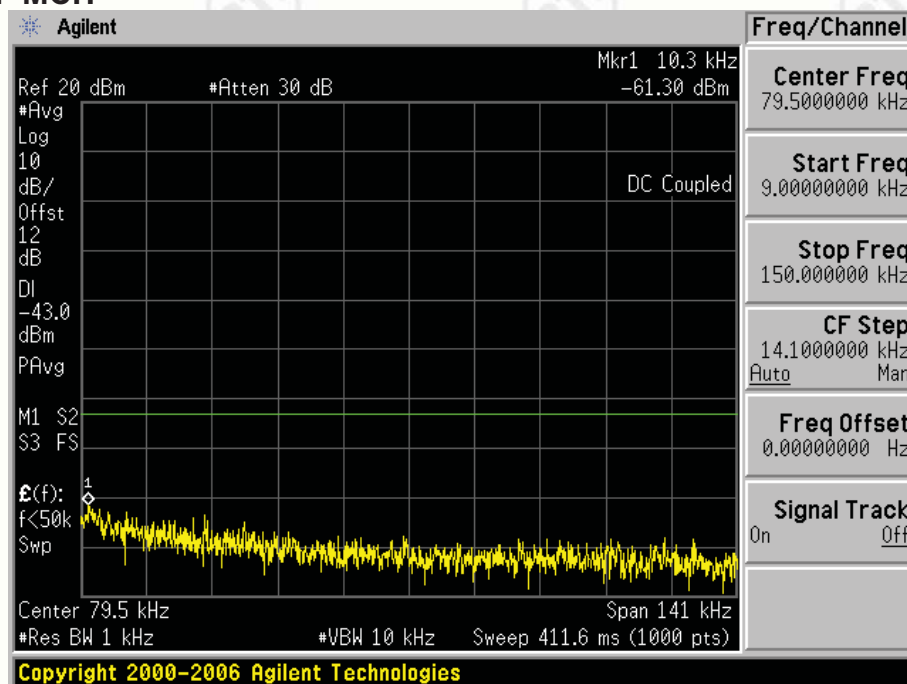


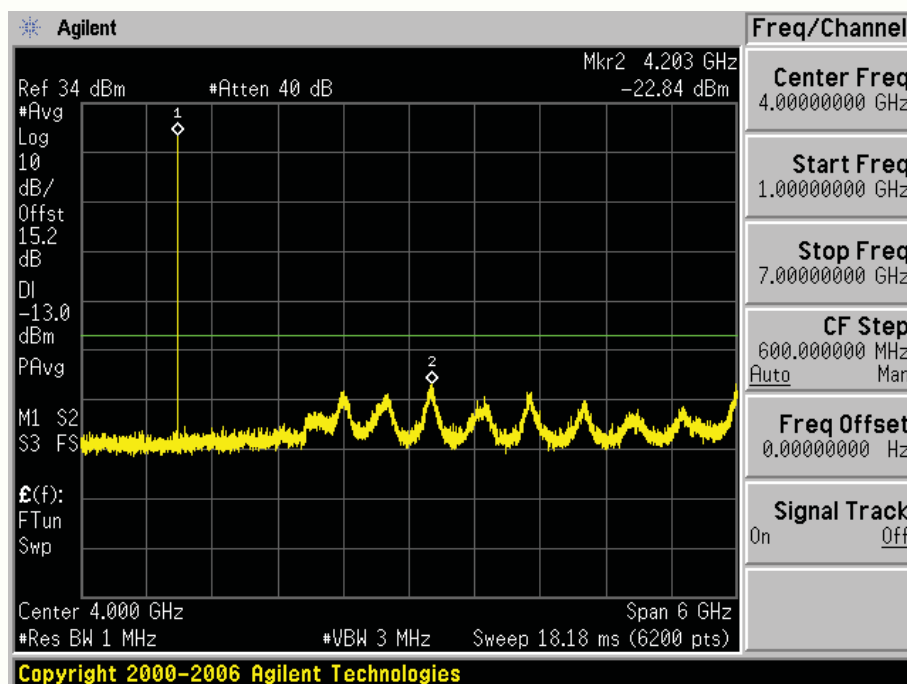
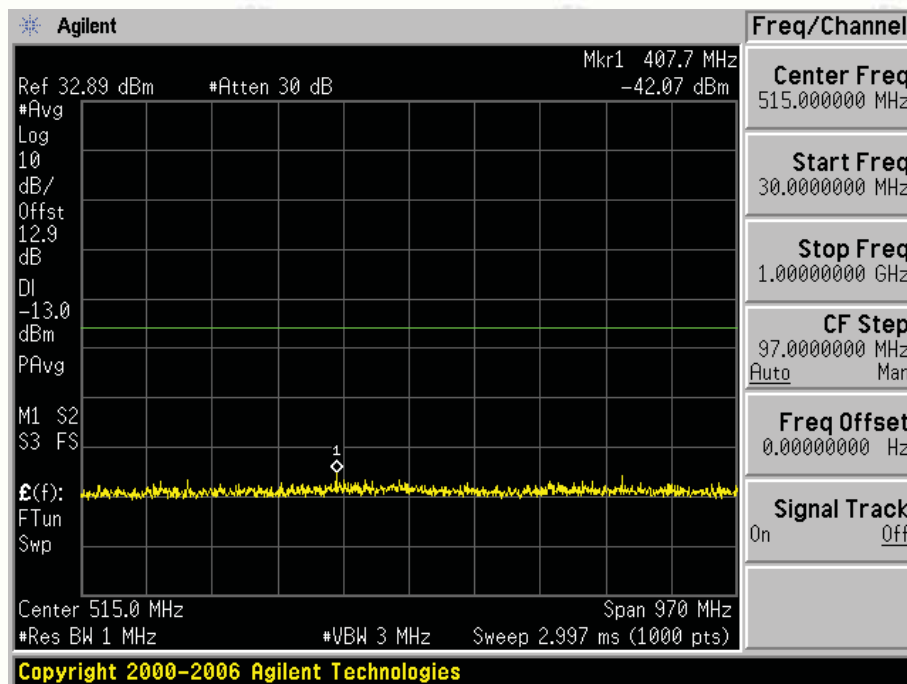


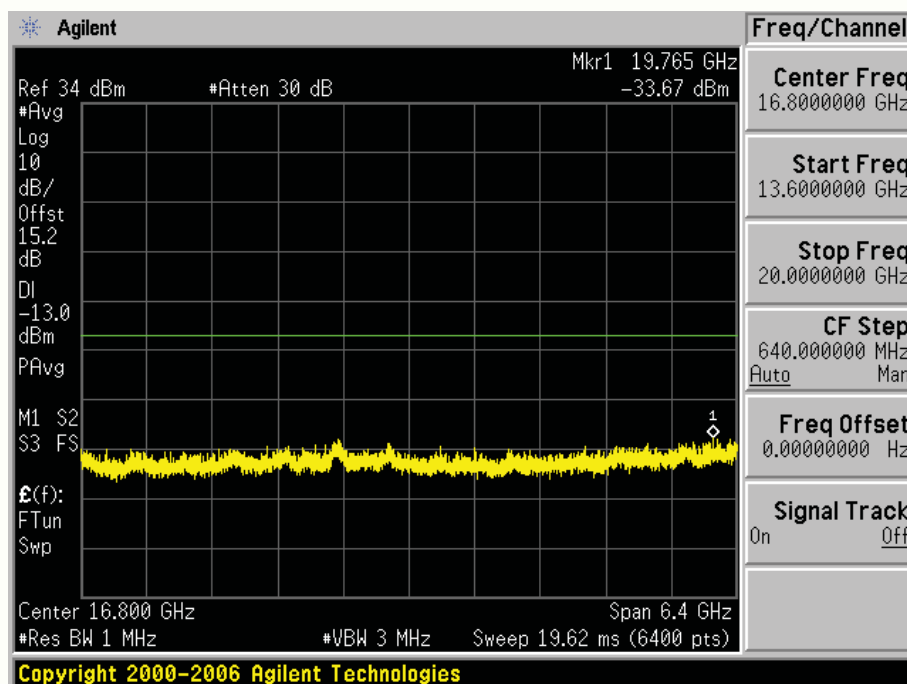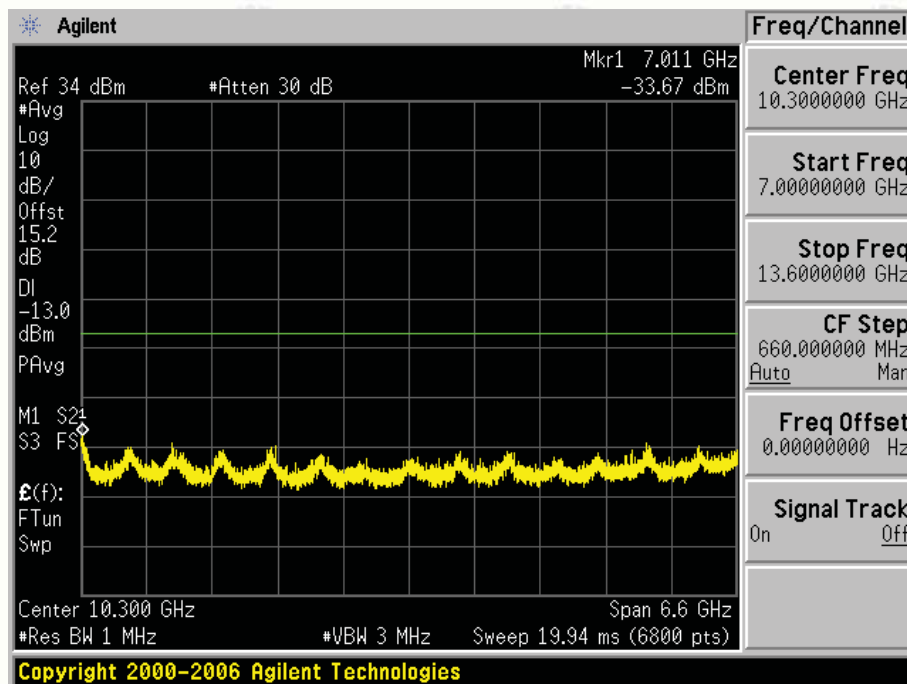

**Test Channel=HCH**

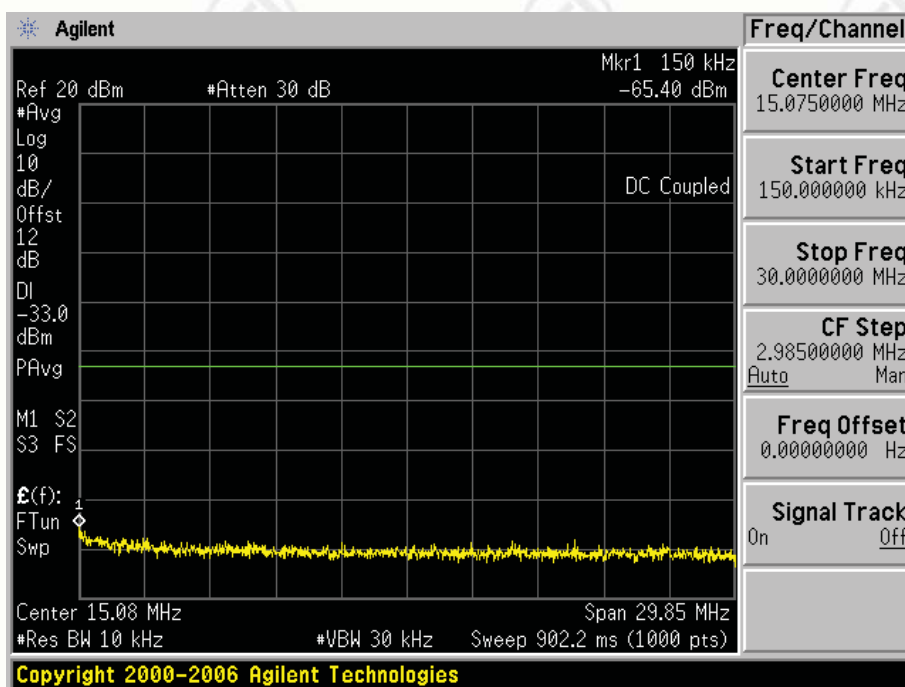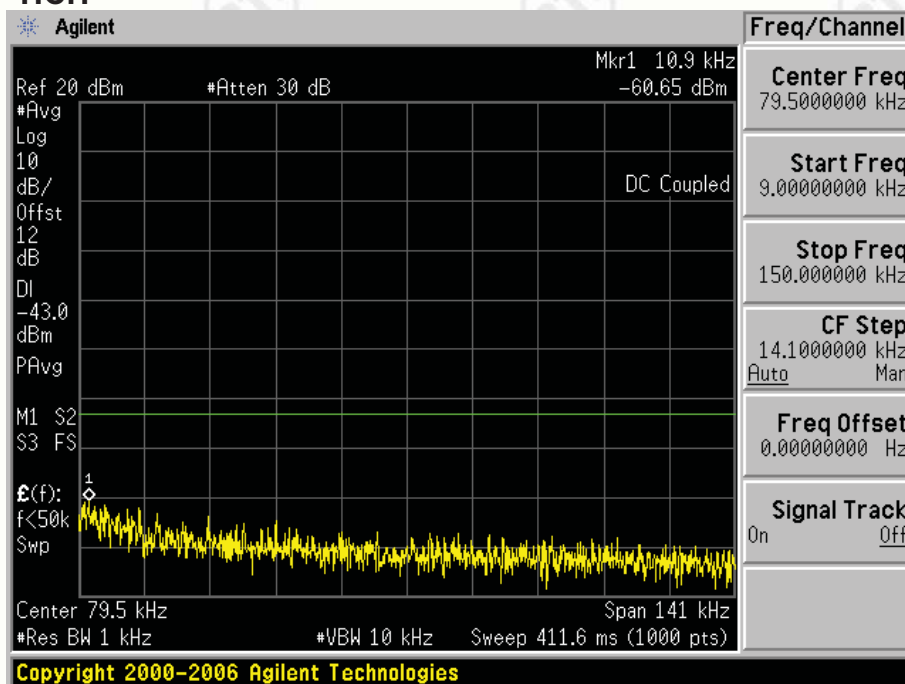

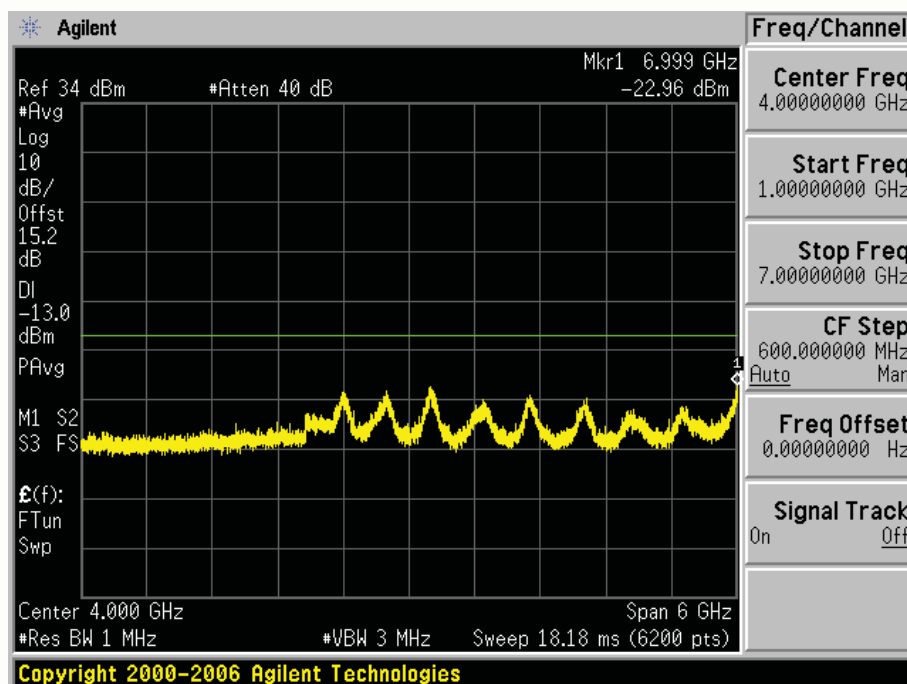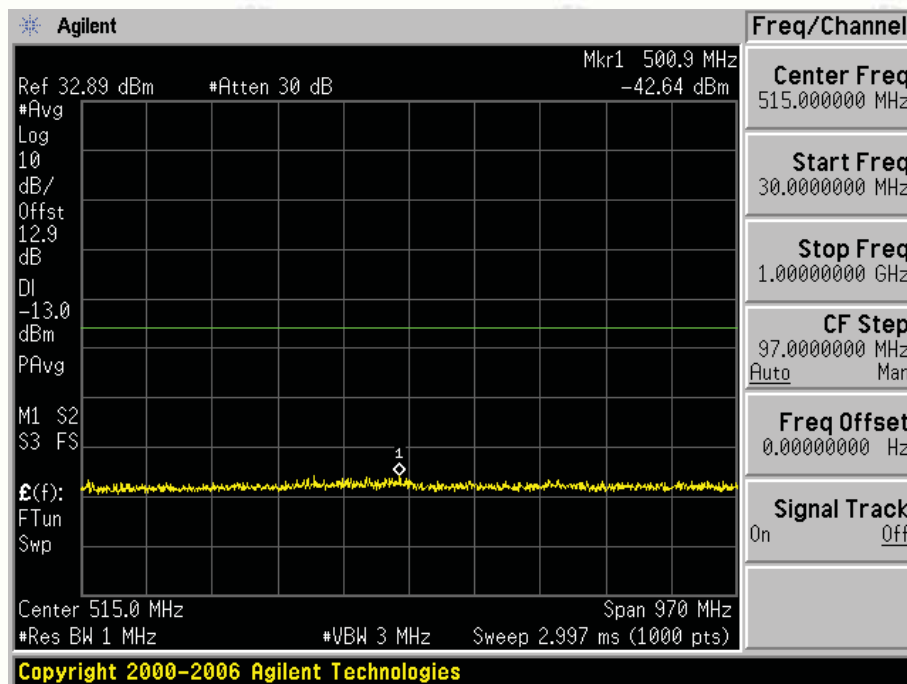

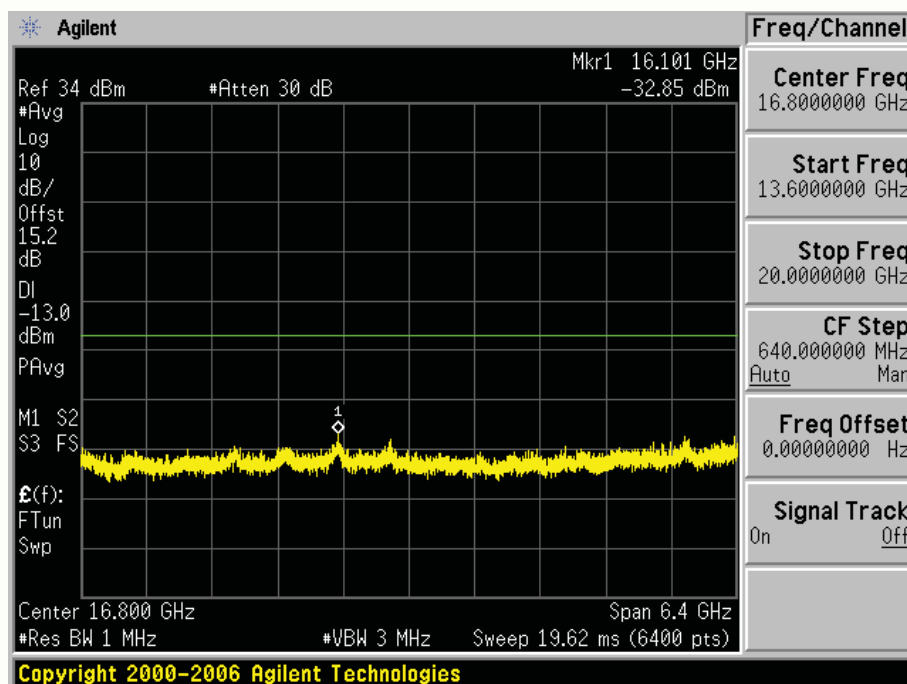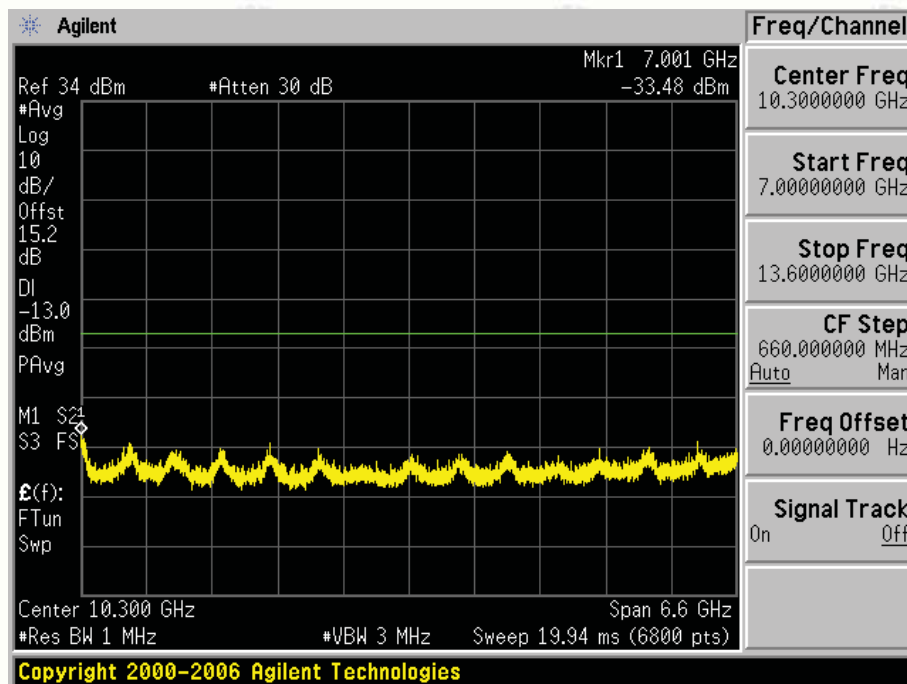

## Appendix F) Frequency Stability

### Frequency Error vs. Voltage:

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GPRS850	TM2	LCH	TN	VL	16.33	0.02	±2.5	PASS
			TN	VN	7.12	0.01	±2.5	PASS
			TN	VH	5.47	0.01	±2.5	PASS
		MCH	TN	VL	16.43	0.02	±2.5	PASS
			TN	VN	14.03	0.02	±2.5	PASS
			TN	VH	5.70	0.01	±2.5	PASS
		HCH	TN	VL	22.32	0.03	±2.5	PASS
			TN	VN	12.73	0.01	±2.5	PASS
			TN	VH	15.78	0.02	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GPRS1900	TM2	LCH	TN	VL	11.17	0.01	±2.5	PASS
			TN	VN	22.75	0.01	±2.5	PASS
			TN	VH	8.52	0.00	±2.5	PASS
		MCH	TN	VL	13.92	0.01	±2.5	PASS
			TN	VN	13.24	0.01	±2.5	PASS
			TN	VH	2.76	0.00	±2.5	PASS
		HCH	TN	VL	17.07	0.01	±2.5	PASS
			TN	VN	8.33	0.00	±2.5	PASS
			TN	VH	1.55	0.00	±2.5	PASS

**Frequency Error vs. Temperature:**

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp. (°C)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GPRS850	TM2	LCH	VN	-30	6.77	0.01	±2.5	PASS
			VN	-20	4.72	0.01	±2.5	PASS
			VN	-10	11.15	0.01	±2.5	PASS
			VN	0	11.39	0.01	±2.5	PASS
			VN	10	13.71	0.02	±2.5	PASS
			VN	20	9.63	0.01	±2.5	PASS
			VN	30	10.63	0.01	±2.5	PASS
			VN	40	10.52	0.01	±2.5	PASS
			VN	50	16.72	0.02	±2.5	PASS
GPRS850	TM2	MCH	VN	-30	12.80	0.02	±2.5	PASS
			VN	-20	15.53	0.02	±2.5	PASS
			VN	-10	16.05	0.02	±2.5	PASS
			VN	0	13.58	0.02	±2.5	PASS
			VN	10	18.89	0.02	±2.5	PASS
			VN	20	11.79	0.01	±2.5	PASS
			VN	30	19.03	0.02	±2.5	PASS
			VN	40	18.71	0.02	±2.5	PASS
			VN	50	17.39	0.02	±2.5	PASS
GPRS850	TM2	HCH	VN	-30	10.99	0.01	±2.5	PASS
			VN	-20	-6.09	-0.01	±2.5	PASS
			VN	-10	21.09	0.02	±2.5	PASS
			VN	0	14.97	0.02	±2.5	PASS
			VN	10	21.25	0.03	±2.5	PASS
			VN	20	18.37	0.02	±2.5	PASS
			VN	30	15.00	0.02	±2.5	PASS
			VN	40	15.95	0.02	±2.5	PASS
			VN	50	25.25	0.03	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Volt.	Test Temp. (°C)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GPRS1900	TM2	LCH	VN	-30	-8.90	0.00	±2.5	PASS
			VN	-20	17.07	0.01	±2.5	PASS
			VN	-10	-6.78	0.00	±2.5	PASS
			VN	0	8.47	0.00	±2.5	PASS
			VN	10	20.85	0.01	±2.5	PASS
			VN	20	62.66	0.03	±2.5	PASS
			VN	30	37.14	0.02	±2.5	PASS
			VN	40	27.94	0.02	±2.5	PASS
			VN	50	33.01	0.02	±2.5	PASS
GPRS1900	TM2	MCH	VN	-30	33.87	0.02	±2.5	PASS
			VN	-20	0.81	0.00	±2.5	PASS
			VN	-10	-21.24	-0.01	±2.5	PASS
			VN	0	-4.78	0.00	±2.5	PASS
			VN	10	17.02	0.01	±2.5	PASS
			VN	20	19.93	0.01	±2.5	PASS
			VN	30	18.92	0.01	±2.5	PASS
			VN	40	18.32	0.01	±2.5	PASS
			VN	50	15.90	0.01	±2.5	PASS
GPRS1900	TM2	HCH	VN	-30	1.63	0.00	±2.5	PASS
			VN	-20	15.84	0.01	±2.5	PASS
			VN	-10	-0.32	0.00	±2.5	PASS
			VN	0	19.68	0.01	±2.5	PASS
			VN	10	11.31	0.01	±2.5	PASS
			VN	20	-6.14	0.00	±2.5	PASS
			VN	30	8.18	0.00	±2.5	PASS
			VN	40	11.77	0.01	±2.5	PASS
			VN	50	11.13	0.01	±2.5	PASS

## Appendix G) Effective Radiated Power of Transmitter (ERP/EIRP)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark									
	30MHz-1GHz	peak	100 kHz	300kHz	Peak									
	Above 1GHz	Peak	1MHz	3MHz	Peak									
Measurement Procedure:	<p>Test procedure as below:</p> <p>1) The EUT was powered ON and placed on a 1.5m high table at a 3 meter fully Anechoic Chamber. The antenna of the transmitter was extended to its maximum length. modulation mode and the measuring receiver shall be tuned to the frequency of the transmitter under test.</p> <p>2) The EUT was set 3 meters(above 18GHz the distance is 1 meter) away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>3) The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.</p> <p>4) Steps 1) to 3) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.</p> <p>5) The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.</p> <p>6) A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 3) is obtained for this set of conditions.</p> <p>7) The output power into the substitution antenna was then measured.</p> <p>8) Steps 6) and 7)were repeated with both antennas polarized.</p> <p>9) Calculate power in dBm by the following formula: ERP(dBm) = Pg(dBm) – cable loss (dB) + antenna gain (dBd) EIRP(dBm) = Pg(dBm) – cable loss (dB) + antenna gain (dBi) EIRP=ERP+2.15dB where: Pg is the generator output power into the substitution antenna.</p> <p>10) Test the EUT in the lowest channel, the middle channel the Highest channel</p> <p>11) The radiation measurements are performed in X, Y, Z axis positioning for EUT operation mode,And found the X axis positioning which it is worse case.</p> <p>12) Repeat above procedures until all frequencies measured was complete.</p>													
Limit:	<table><tr><td>Mode</td><td>GPRS 850/WCDMA/HSDPA /HSUPA Band V</td><td>GPRS 1900/WCDMA/HSDPA /HSUPA Band V</td></tr><tr><td>Frequency</td><td>824 – 849MHz</td><td>1850 – 1910MHz</td></tr><tr><td>Limit</td><td>38.45dBm ( 7W )</td><td>33.01dBm ( 2W )</td></tr></table>					Mode	GPRS 850/WCDMA/HSDPA /HSUPA Band V	GPRS 1900/WCDMA/HSDPA /HSUPA Band V	Frequency	824 – 849MHz	1850 – 1910MHz	Limit	38.45dBm ( 7W )	33.01dBm ( 2W )
Mode	GPRS 850/WCDMA/HSDPA /HSUPA Band V	GPRS 1900/WCDMA/HSDPA /HSUPA Band V												
Frequency	824 – 849MHz	1850 – 1910MHz												
Limit	38.45dBm ( 7W )	33.01dBm ( 2W )												

**Measurement Data**

GPRS 850 Class 8							
Channel/fc (MHz)	Height (cm)	Azimuth (deg)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
128/824.2	150	98	33.98	38.45	-4.47	Pass	H
	150	128	33.45	38.45	-5.00	Pass	V
190/836.6	150	100	33.77	38.45	-4.68	Pass	H
	150	276	33.56	38.45	-4.89	Pass	V
251/848.8	150	165	33.39	38.45	-5.06	Pass	H
	150	198	33.28	38.45	-5.17	Pass	V

GPRS 1900 Class 8							
Channel/fc (MHz)	Height (cm)	Azimuth (deg)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
512/1850.2	150	100	28.87	33.01	-4.14	Pass	H
	150	126	28.56	33.01	-4.45	Pass	V
661/1880.0	150	268	28.67	33.01	-4.34	Pass	H
	150	300	28.49	33.01	-4.52	Pass	V
810/1909.8	150	125	28.98	33.01	-4.03	Pass	H
	150	100	28.78	33.01	-4.23	Pass	V

## Appendix H) Field strength of spurious radiation

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-30MHz	Peak	10kHz	30kHz	Peak
	30MHz-1GHz	Peak	100 kHz	300kHz	Peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Measurement Procedure:	<p>1. Scan up to 10<sup>th</sup> harmonic, find the maximum radiation frequency to measure.</p> <p>2. The technique used to find the Spurious Emissions of the transmitter was the antenna substitution method. Substitution method was performed to determine the actual ERP/EIRP emission levels of the EUT.</p> <p>Test procedure as below:</p> <ol style="list-style-type: none"> <li>1) The EUT was powered ON and placed on a 1.5m high table at a 3 meter fully Anechoic Chamber. The antenna of the transmitter was extended to its maximum length. modulation mode and the measuring receiver shall be tuned to the frequency of the transmitter under test.</li> <li>2) The EUT was set 3 meters (above 18GHz the distance is 1 meter) away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3) The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.</li> <li>4) Steps 1) to 3) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.</li> <li>5) The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.</li> <li>6) A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 3) is obtained for this set of conditions.</li> <li>7) The output power into the substitution antenna was then measured.</li> <li>8) Steps 6) and 7) were repeated with both antennas polarized.</li> <li>9) Calculate power in dBm by the following formula:  <math display="block">\text{ERP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBd)}</math> <math display="block">\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}</math> <math display="block">\text{EIRP} = \text{ERP} + 2.15\text{dB}</math> <p>where:</p> <p>Pg is the generator output power into the substitution antenna.</p> <li>10) Test the EUT in the lowest channel, the middle channel the Highest channel</li> <li>11) The radiation measurements are performed in X, Y, Z axis positioning for EUT operation mode, And found the X axis positioning which it is worse case.</li> <li>12) Repeat above procedures until all frequencies measured was complete.</li> </li></ol>				
Limit:	Attenuated at least 43+10log(P)				

**Measurement Data**

GPRS 850 (Class 8) 128 channel/824.2 MHz(lower channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1648.4	162	165	-36.77	-13	-23.77	Pass	H
2472.6	158	173	-38.01	-13	-25.01	Pass	H
3296.8	155	160	-38.72	-13	-25.72	Pass	H
1648.4	165	179	-36.82	-13	-23.82	Pass	V
2472.6	150	199	-37.93	-13	-24.93	Pass	V
3296.8	164	187	-38.69	-13	-25.69	Pass	V

GPRS 850 (Class 8) 190 channel/836.6MHz (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1673.2	153	188	-36.43	-13	-23.43	Pass	H
2509.8	157	201	-38.42	-13	-25.42	Pass	H
3346.4	162	179	-38.90	-13	-25.90	Pass	H
1673.2	155	191	-36.55	-13	-23.55	Pass	V
2509.8	160	193	-38.66	-13	-25.66	Pass	V
3346.4	153	162	-39.12	-13	-26.12	Pass	V

GPRS 850 (Class 8) 251 channel/848.8MHz(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1697.6	154	205	-37.33	-13	-24.33	Pass	H
2546.4	157	189	-38.48	-13	-25.48	Pass	H
3395.2	162	193	-39.89	-13	-26.89	Pass	H
1697.6	160	177	-37.92	-13	-24.92	Pass	V
2546.4	164	178	-39.01	-13	-26.01	Pass	V
3395.2	172	194	-39.97	-13	-26.97	Pass	V

GPRS 1900 (Class 8) 512 channel/1850.2MHz(lower channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
3701.4	156	232	-35.59	-13	-22.59	Pass	H
5550.6	160	248	-36.11	-13	-23.11	Pass	H
7400.8	159	229	-37.89	-13	-24.89	Pass	H
3701.4	162	249	-36.02	-13	-23.02	Pass	V
5550.6	151	236	-37.37	-13	-24.37	Pass	V
7400.8	154	242	-37.97	-13	-24.97	Pass	V

GPRS 1900(Class 8) 661 channel/1880.0MHz(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
3760	151	227	-35.92	-13	-22.92	Pass	H
5640	157	232	-36.11	-13	-23.11	Pass	H
7520	160	219	-37.41	-13	-24.41	Pass	H
3760	154	238	-36.46	-13	-23.46	Pass	V
5640	162	229	-37.09	-13	-24.09	Pass	V
7520	152	230	-37.98	-13	-24.98	Pass	V

GPRS 1900(Class 8) 810 channel/1909.8MHz(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
3819.6	164	198	-36.78	-13	-23.78	Pass	H
5729.4	150	224	-36.92	-13	-23.92	Pass	H
7639.2	158	239	-37.77	-13	-24.77	Pass	H
3819.6	160	220	-37.34	-13	-24.34	Pass	V
5729.4	156	218	-38.03	-13	-25.03	Pass	V
7639.2	162	225	-38.49	-13	-25.49	Pass	V

**Note:**


1) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

2) All class have been tested, Only worst case is reported.

## PHOTOGRAPHS OF TEST SETUP



**Radiated spurious emission Test Setup-1 (Below 1GHz)**

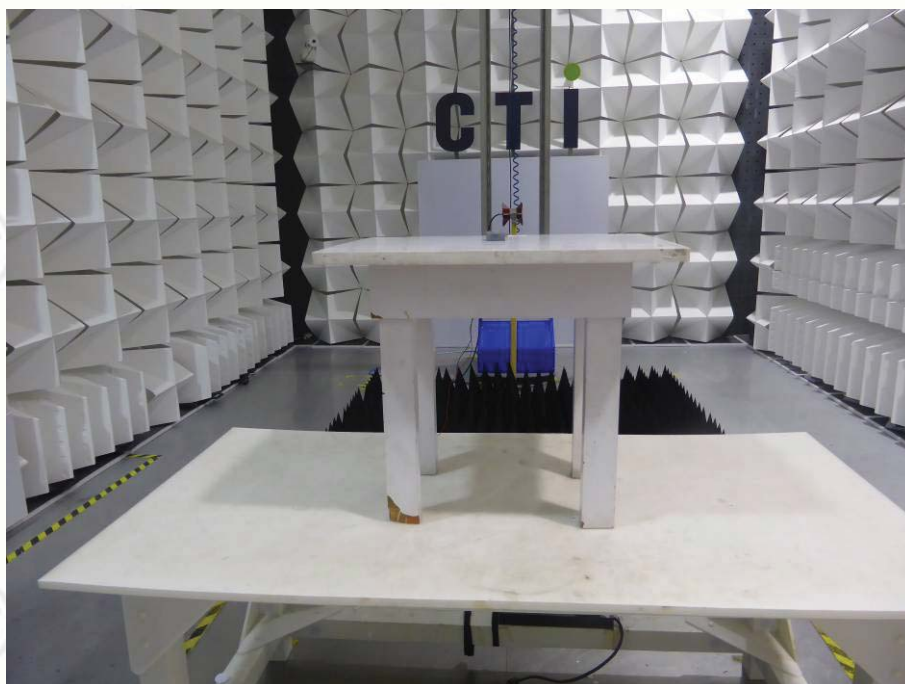

**Radiated spurious emission Test Setup-2(Above 1GHz)**

## PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS



View of external EUT-1



View of external EUT-2




View of internal EUT-1



View of internal EUT-2



View of internal EUT-3

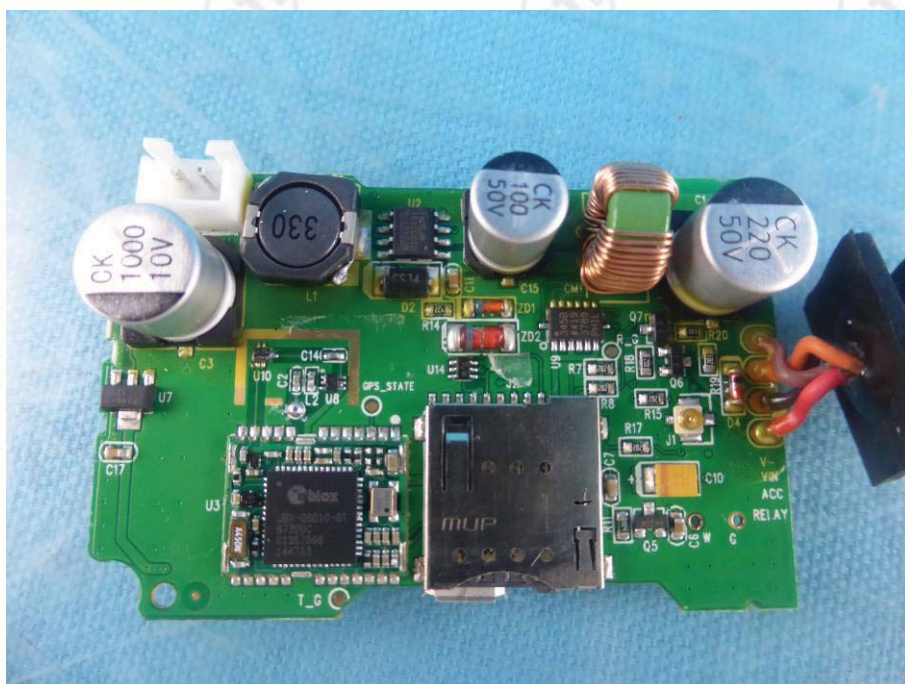


View of internal EUT-4



View of internal EUT-5



View of internal EUT-6

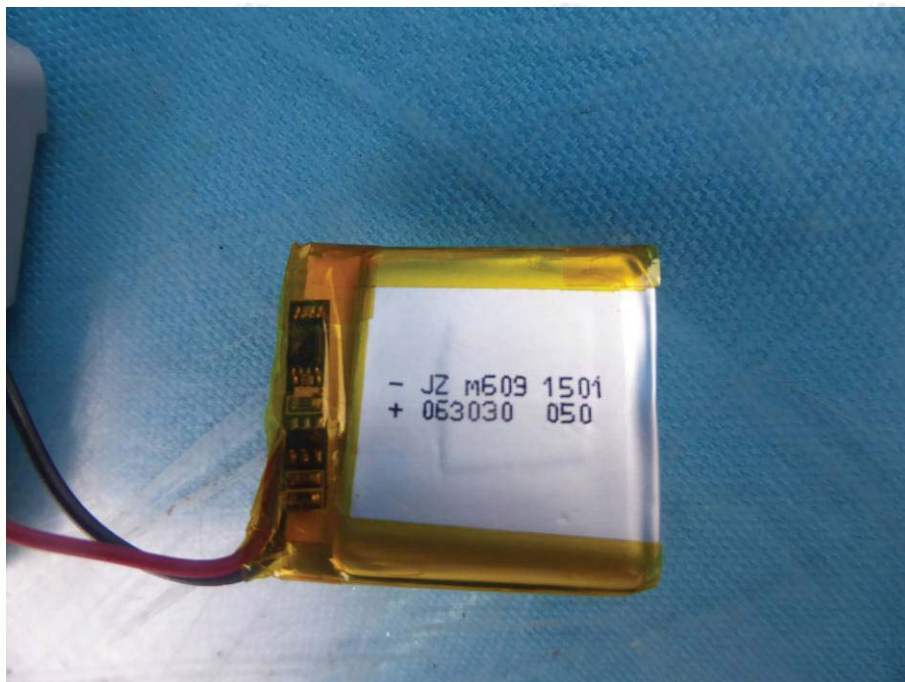

View of internal EUT-7

\*\*\* End of Report \*\*\*

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.