



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Huizhou Desay SV Automotive Co., Ltd.

Address: NO.103, Hechang 5th Road West, Zhongkai National Hi-tech Industrial Development Zone, Huizhou, Guangdong, P.R. China

Product Name: Millimeter Wave Corner Radar Sensor

**Standard(s): 47 CFR Part 95, Subpart M
ANSI C63.26-2015
KDB 653005 D01 76-81 GHz Radars v01r02**

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR230956480-00B

Date Of Issue: 2023/10/16

Reviewed By: Calvin Chen

Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	7
1.2.2 Support Equipment List and Details	7
1.2.3 Support Cable List and Details	7
1.2.4 Block Diagram of Test Setup.....	8
1.3 MEASUREMENT UNCERTAINTY	9
2. SUMMARY OF TEST RESULTS	10
3. REQUIREMENTS AND TEST PROCEDURES	11
3.1 RADIATED POWER	11
3.1.1 Applicable Standard.....	11
3.2.2 EUT Setup.....	11
3.2.3 Test Procedure	12
3.2 UNWANTED EMISSIONS	13
3.2.1 Applicable Standard.....	13
3.2.2 EUT Setup.....	14
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	16
3.2.4 Test Procedure	16
3.2.5 Corrected Amplitude & Margin Calculation.....	17
3.3 FREQUENCY STABILITY:	18
3.3.1 Applicable Standard.....	18
3.3.3 Test Procedure	18
3.4 OCCUPIED BANDWIDTH:	19
3.4.1 Applicable Standard.....	19
3.4.2 EUT Setup.....	19
3.4.3 Test Procedure	19
3.5 DUTY CYCLE:	20
3.5.1 EUT Setup.....	20
3.5.2 Test Procedure	20
4. Test DATA AND RESULTS	21
4.1 RADIATED POWER	21
4.2 RADIATION SPURIOUS EMISSIONS	23
4.3 FREQUENCY STABILITY:	41
4.4 OCCUPIED BANDWIDTH:	42
4.5 DUTY CYCLE:.....	44
5. RF EXPOSURE EVALUATION	46
5.1 MAXIMUM PERMISSIBLE EXPOSURE (MPE)	46

5.1.1 APPLICABLE STANDARD.....	46
5.1.2 PROCEDURE.....	46
6. EUT PHOTOGRAPHS	48
7. TEST SETUP PHOTOGRAPHS	49

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230956480-00B	Original Report	2023/10/16

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

1.1.1 General:

EUT Name:	Millimeter Wave Corner Radar Sensor
EUT Model:	SRD2913/18
Operation Frequency:	76.6GHz
Maximum Average Output Power (Radiated):	44.72 dBm
Modulation Type:	FMCW
Sweep Period:	66ms
Sweep Bandwidth ▲:	630MHz(76.3~76.93GHz)
Chirp Time ▲:	49.5μs
Antenna Number:	3TX4RX
Rated Input Voltage:	DC 9-16V
Serial Number:	2BOW-1
EUT Received Date:	2023/9/22
EUT Received Status:	Good

1.1.2 Antenna Information Detail ▲:

Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
Patch Antenna	Unknown	15 dBi/77~81GHz

1.1.3 Accessory Information:

No.

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer. The device has 3T4R, 3TX only simultaneously transmit.
Equipment Modifications:	No
EUT Exercise Software:	No
Engineering Mode was provided by manufacturer▲. The maximum power was configured default setting.	

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	T460S	60PDTEK8
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386
Unknown	CAN	Unknown	Unknown

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Power Cable	No	No	5	EUT	DC Power Supply
Power Cable	No	No	5	EUT	CAN
USB Cable	No	No	5	CAN	Laptop

1.2.4 Block Diagram of Test Setup

Spurious emissions:

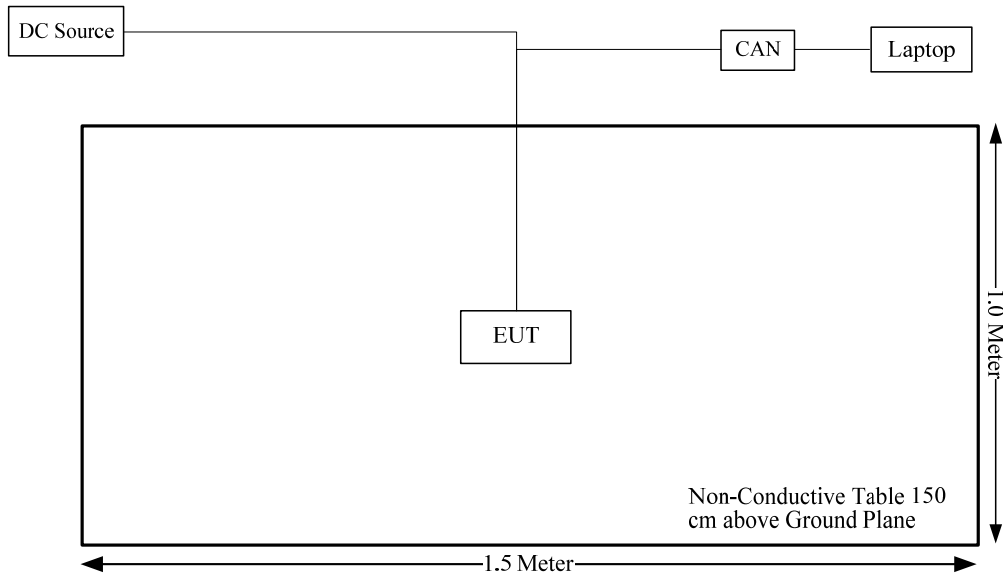

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
Radiated Emissions	9kHz~30MHz: 4.12dB 30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G: 5.47 dB, 26.5G~40G:5.63 dB, 40~60G: 4.83dB, 60G~90G: 4.94dB, 90G-140G: 5.46dB, 140G-220G: 6.00dB, 220G-325G: 7.35dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
FCC§2.1046, §95.3367	Radiated Power	Compliant
FCC§2.1053, §95.3379	Unwanted Emissions	Compliant
FCC§2.1055(d), §95.3379	Frequency Stability	Compliant
FCC§2.1049	Occupied Bandwidth	Compliant
FCC §1.1310, §2.1091, §95.3385	Maximum Permissible Exposure (MPE)	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 Radiated Power


3.1.1 Applicable Standard

FCC §2.1046, §95.3367;

The fundamental radiated emission limits within the 76-81 GHz band are expressed in terms of Equivalent Isotropically Radiated Power (EIRP) and are as follows:

- (a) The maximum power (EIRP) within the 76-81 GHz band shall not exceed 50 dBm based on measurements employing a power averaging detector with a 1 MHz Resolution Bandwidth (RBW).
- (b) The maximum peak power (EIRP) within the 76-81 GHz band shall not exceed 55 dBm based on measurements employing a peak detector with a 1 MHz RBW.

3.2.2 EUT Setup

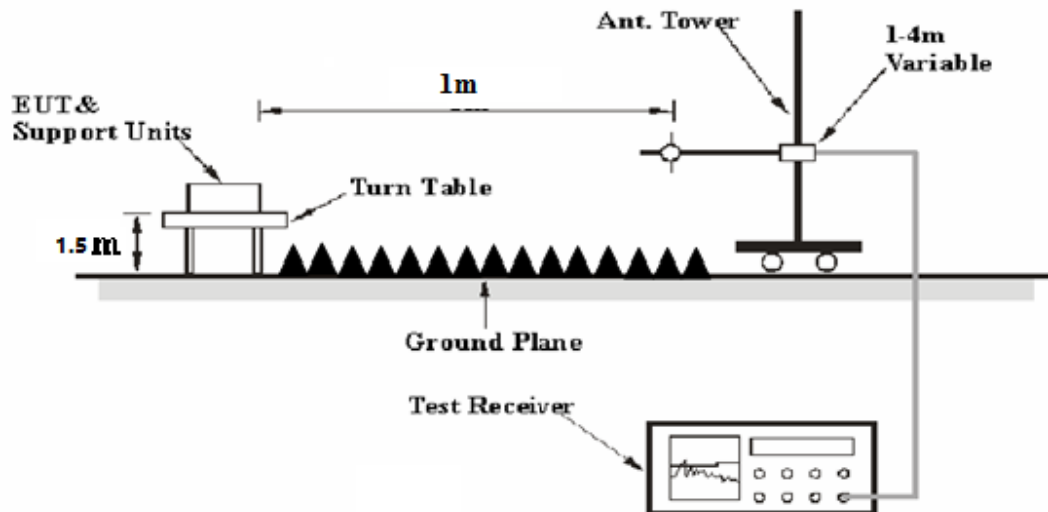

3.2.3 Test Procedure

Refer to ANSI C63.26-2015 Clause 5.2.7

Connect the test antenna for the fundamental frequency band to a spectrum analyzer via an external mixer.

Set spectrum analyzer RBW, VBW, detector, span, and so on, to the proper values.

Maximize the fundamental emission, noting that multiple peaks may be found at different beam orientations and/or polarizations

Calculate the EIRP from the measured field strength using equation as follows:

$$\text{EIRP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8$$

EIRP is the equivalent isotropically radiated power

E is the field strength of the emission at the measurement distance

D is the measurement distance

3.2 Unwanted Emissions

3.2.1 Applicable Standard

FCC §2.1053 and §95.3379;

(a) The power density of any emissions outside the 76-81 GHz band shall consist solely of spurious emissions and shall not exceed the following:

(1) Radiated emissions below 40 GHz shall not exceed the field strength as shown in the following emissions table.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

(i) In the emissions table in paragraph (a)(1) of this section, the tighter limit applies at the band edges.

(ii) The limits in the table in paragraph (a)(1) of this section are based on the frequency of the unwanted emissions and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.

(iii) The emissions limits shown in the table in paragraph (a)(1) of this section are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9.0-90.0 kHz, 110.0-490.0 kHz, and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector with a 1 MHz RBW.

(2) The power density of radiated emissions outside the 76-81 GHz band above 40.0 GHz shall not exceed the following, based on measurements employing an average detector with a 1 MHz RBW:


(i) For radiated emissions outside the 76-81 GHz band between 40 GHz and 200 GHz from field disturbance sensors and radar systems operating in the 76-81 GHz band: 600 pW/cm² at a distance of 3 meters from the exterior surface of the radiating structure.

(ii) For radiated emissions above 200 GHz from field disturbance sensors and radar systems operating in the 76-81 GHz band: 1000 pW/cm² at a distance of 3 meters from the exterior surface of the radiating structure.


(3) For field disturbance sensors and radar systems operating in the 76-81 GHz band, the spectrum shall be investigated up to 231.0 GHz.

3.2.2 EUT Setup


Below 1GHz:


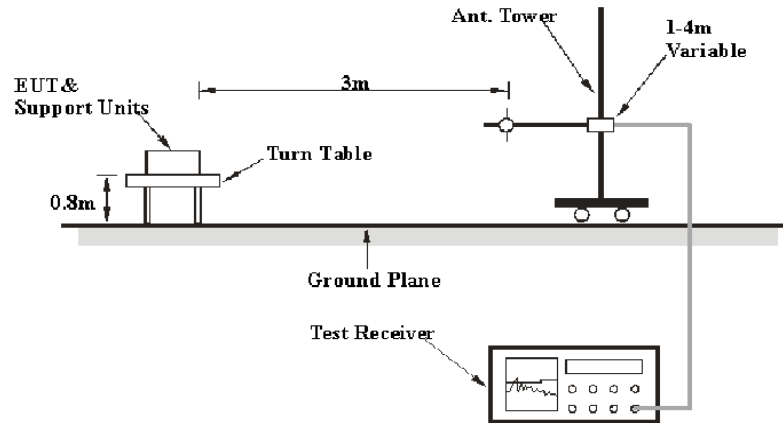


1-26.5 GHz:

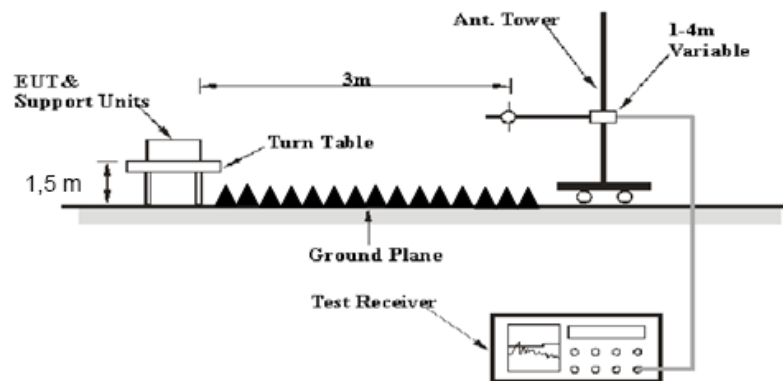

26.5-40 GHz:

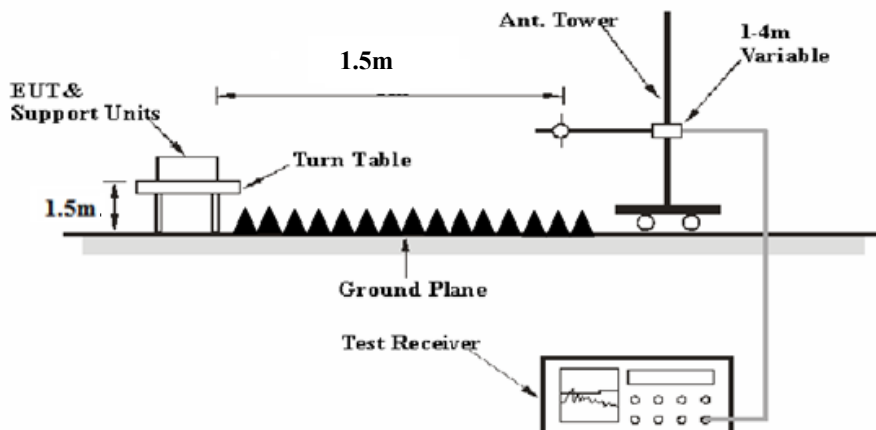

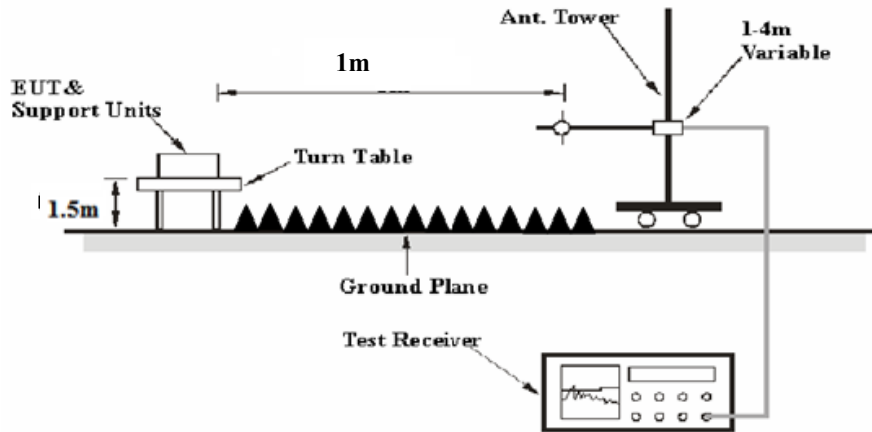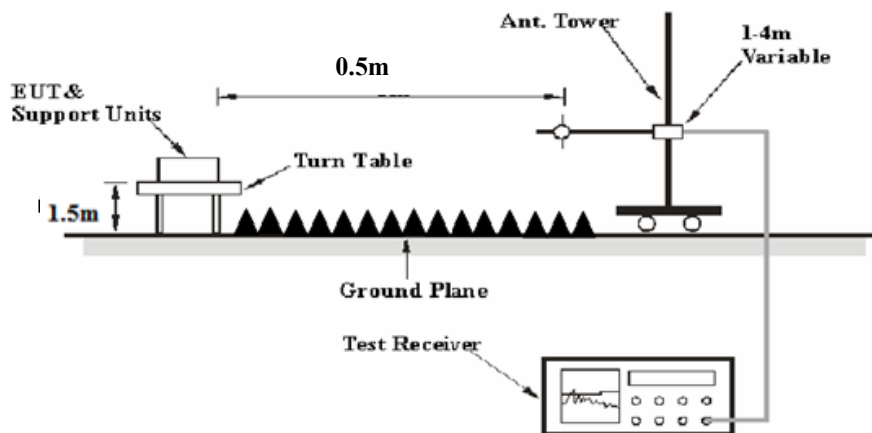40-90 GHz:**90-231 GHz:**

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.26-2015. The specification used was the FCC 95.3379 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 231 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	200 Hz	1 kHz	200 Hz	QP/Average
150 kHz – 30 MHz	9 kHz	30 kHz	9 kHz	QP/Average
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
1-40 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Average
Above 40 GHz	1MHz	3 MHz	/	Average

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The 26.5- 40GHz test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m

For 26.5-40GHz

Distance extrapolation factor = $20 \log(\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB=6.02dB

For above 40GHz, external harmonic mixers are utilized. The antenna is scanned around the entire perimeter surface of the EUT, in both horizontal and vertical polarizations. The Mixers and it's RF cables is compose a system for calibration, the conversion factor was added into the test Spectrum Analyzer in testing.

The far-field boundary is given in ANSI C63.26-2015:

$$R_m = 2D^2 / \lambda$$

Where:

D is the largest dimension of the antenna aperture in m and

λ is the free-space wavelength in m at the frequency of measurement.

The minimum test distance for the frequency range 40GHz-231GHz determine as below:

Model	Frequency Range (GHz)	Largest Dimension of the Horn Antenna (mm)	Minimum Test Distance R_m (m)
M19RH	40-60	46.3	0.57
M12RH	60-90	30.02	0.36
M08RH	90-140	19.7	0.23
M05RH	140-220	12.5	0.15
M03RH	220-325	8.36	0.10

Note: the test distances used were 1.0 m from 40 GHz to 90 GHz, and 0.5 m from 90 GHz to 231GHz, it can be seen that the EUT was always in the Far-field of the Receive Antenna during all Radiated Emissions Tests.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$\text{Result} = \text{Reading} + \text{Factor}$$

For 30MHz-26.5GHz:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

For 26.5GHz-40GHz

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Distance extrapolation Factor}$$

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Result}$$

3.3 Frequency Stability:

3.3.1 Applicable Standard

FCC §95.3379 (b)

(b) Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to +50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

3.3.3 Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external power supply and the RF output was connected to Test equipment via feed-through attenuators. The EUT was placed inside the temperature chamber. The power leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Frequency Counter.

Frequency Stability vs. Voltage:

- 1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

The output frequency was recorded for each voltage.


3.4 Occupied Bandwidth:

3.4.1 Applicable Standard

FCC §2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

3.4.2 EUT Setup

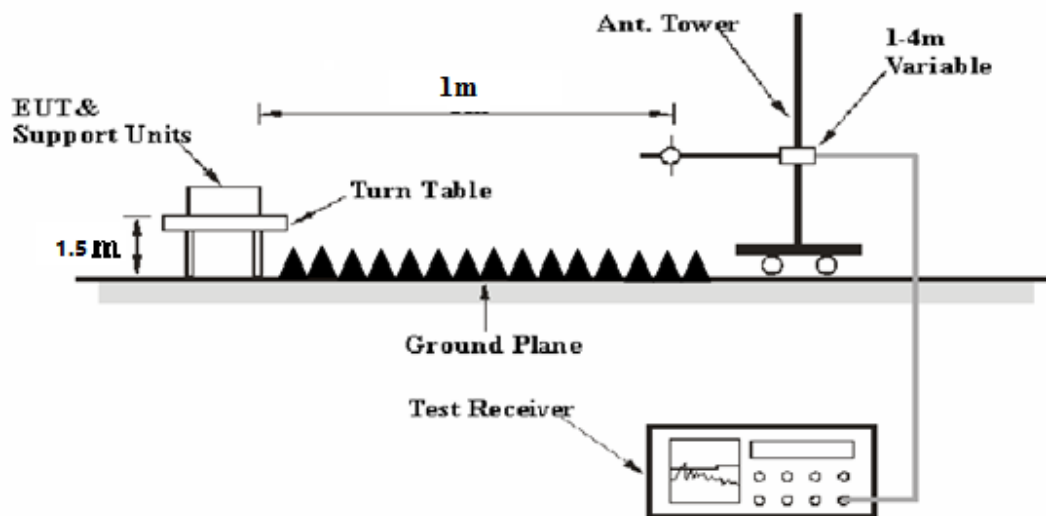

3.4.3 Test Procedure

The following procedure shall be used for measuring (99%) power bandwidth:


- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).
- The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.
- Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.

NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.

- Set the detection mode to peak, and the trace mode to max-hold.
- The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

3.5 Duty Cycle:

3.5.1 EUT Setup

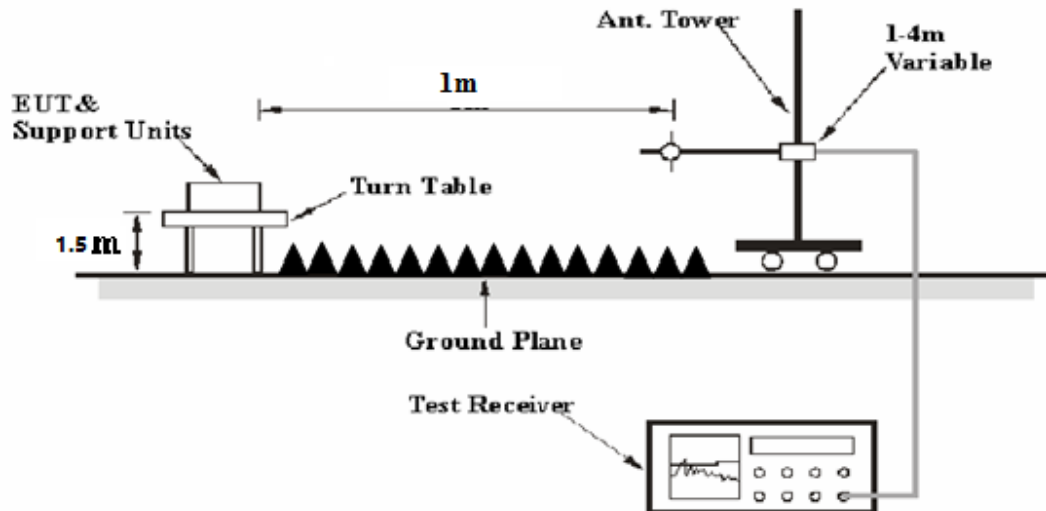

3.5.2 Test Procedure

According to ANSI C63.26-2015 Section 5.2.4.3.4

An oscilloscope with a diode detector that combined have sufficiently short response time to permit accurate measurements of the on and off times. A fundamental condition for all average power compliance measurements are that they be performed with the EUT transmitting continuously (duty cycle $\geq 98\%$) at maximum output power level. However, in those cases where this condition cannot be realized, then one of the alternative procedures must be selected based on whether the EUT transmitter exhibits a constant or a non-constant duty cycle. The measurement of transmitter duty cycle shall be performed using one of the following techniques:

- Off times of the transmitted signal.
- The zero-span mode on a spectrum analyzer if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

4. Test DATA AND RESULTS

4.1 Radiated Power

Serial Number:	2BOW-1	Test Date:	2023/10/12
Test Site:	966-1	Test Mode:	Transmitting
Tester:	Mack Huang	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	26.8	Relative Humidity: (%)	57	ATM Pressure: (kPa)	101.3

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
OML	Harmonic Mixer	WR12/M12HWD	E60119-1	2020/10/17	2023/10/16
OML	Horn Antenna	M12RH	E60119-2	2020/10/18	2023/10/17
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30

* **Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Frequency (GHz)	Receiver		Polar (H/V)	Factor (dB/m)	EIRP (dBm)
	Reading (dBμV)	Detector			
76.6	98.51	PK	V	43.45	37.16
76.6	100.47	AV	V	43.45	39.12

Factor = Antenna Factor

EIRP = Reading + Factor + 20log(Measurement distance) - 104.8

Measurement distance = 1m

Detector	EIRP (dBm)	Chirps Correction Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dBm)
Peak	37.16	7.56	44.72	55	10.28
Average	25.12	/	25.12	50	24.88

Result = EIRP + Chirps Correction Factor

The chirps correction factor was calculated using the formula:

$$CF_{\text{chirp}} = 5 * \log \left(1 + K * \left(\frac{\text{Span}}{t * RBW^2} \right)^2 \right)$$

K = a correction factor for the setting process of the gaussian shaped filter (0.1947)

t = the length of the chirp

4.2 Radiation Spurious Emissions

Serial Number:	2BOW-1	Test Date:	2023/10/11~2023/10/12
Test Site:	966-2, 966-1	Test Mode:	Operating
Tester:	Vic Du, Mack Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.3-26.8	Relative Humidity: (%)	52-57	ATM Pressure: (kPa)	101.1~101.3
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMCO	Passive Loop Antenna	6512	9706-1209	2023/2/15	2026/2/14
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2021/10/14	2024/10/13
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/9	2023/11/8
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/2/5	2024/2/4
AH	Preamplifier	PAM-1840VH	190	2022/11/9	2023/11/8
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2023/8/6	2024/8/5
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021/2/5	2024/2/4
OML	Harmonic Mixer	WR19/M19HWD	U60314-1	2020/10/16	2023/10/15
OML	Horn Antenna	M19RH	11648-03	2020/10/16	2023/10/15
OML	Harmonic Mixer	WR12/M12HWD	E60119-1	2020/10/17	2023/10/16
OML	Horn Antenna	M12RH	E60119-2	2020/10/18	2023/10/17
OML	Harmonic Mixer	WR08/M08HWD	F60315-1	2020/10/22	2023/10/21
OML	Horn Antenna	M08RH	F60315-2	2020/10/24	2023/10/23
OML	Harmonic Mixer	WR05/M05HWD	G60107-1	2020/10/25	2023/10/24
OML	Horn Antenna	M05RH	G60107-2	2020/10/26	2023/10/25
OML	Harmonic Mixer	WR03/M03HWD	H60122-1	2020/11/10	2023/11/9

OML	Horn Antenna	M03RH	H60122-2	2020/11/6	2023/11/5
-----	--------------	-------	----------	-----------	-----------

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:


Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

1) 9kHz-30MHz

Project No.: CR230956480-RF
 Tester: Vic Du
 Polarization: Parallel
 Note:


Date: 2023-10-12

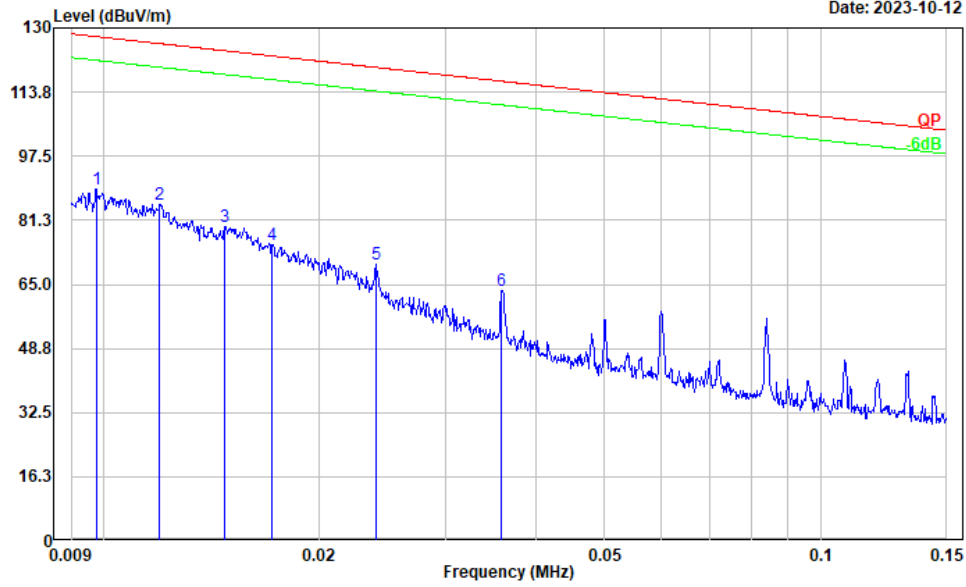

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.010	31.01	58.27	89.28	127.81	38.53	Peak
2	0.012	29.08	56.31	85.39	126.05	40.66	Peak
3	0.015	25.90	53.85	79.75	124.22	44.47	Peak
4	0.017	23.37	51.74	75.11	122.90	47.79	Peak
5	0.024	22.21	47.82	70.03	120.02	49.99	Peak
6	0.036	19.17	44.41	63.58	116.50	52.92	Peak


Project No.: CR230956480-RF
 Tester: Vic Du
 Polarization: Parallel
 Note:

Date: 2023-10-12

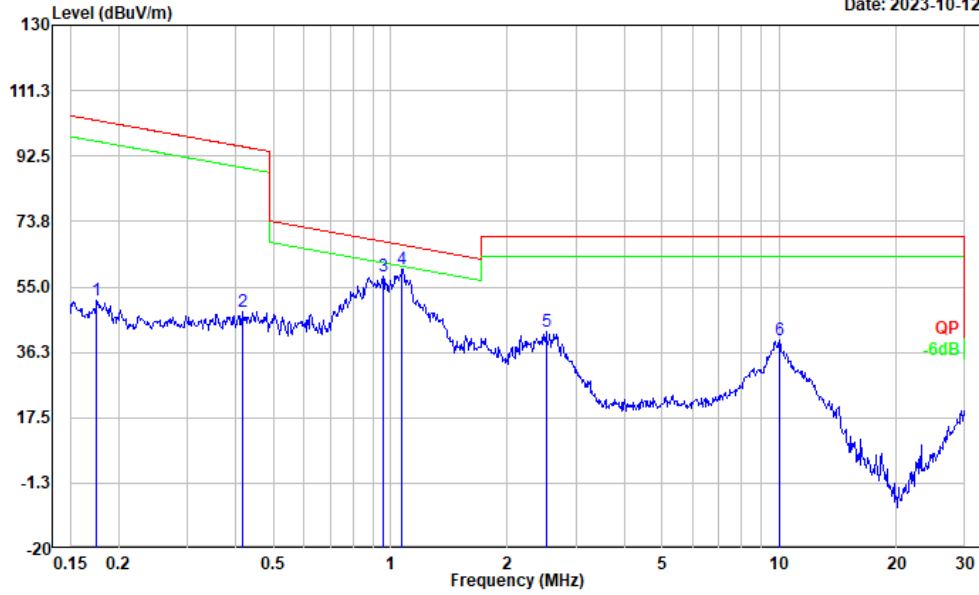

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.176	20.31	30.95	51.26	102.70	51.44	Peak
2	0.417	24.33	23.70	48.03	95.20	47.17	Peak
3	0.958	40.70	17.24	57.94	67.85	9.91	Peak
4	1.071	43.56	16.46	60.02	66.86	6.84	Peak
5	2.513	32.65	9.73	42.38	69.54	27.16	Peak
6	10.019	35.25	4.39	39.64	69.54	29.90	Peak


Project No.: CR230956480-RF
 Tester: Vic Du
 Polarization: Perpendicular
 Note:

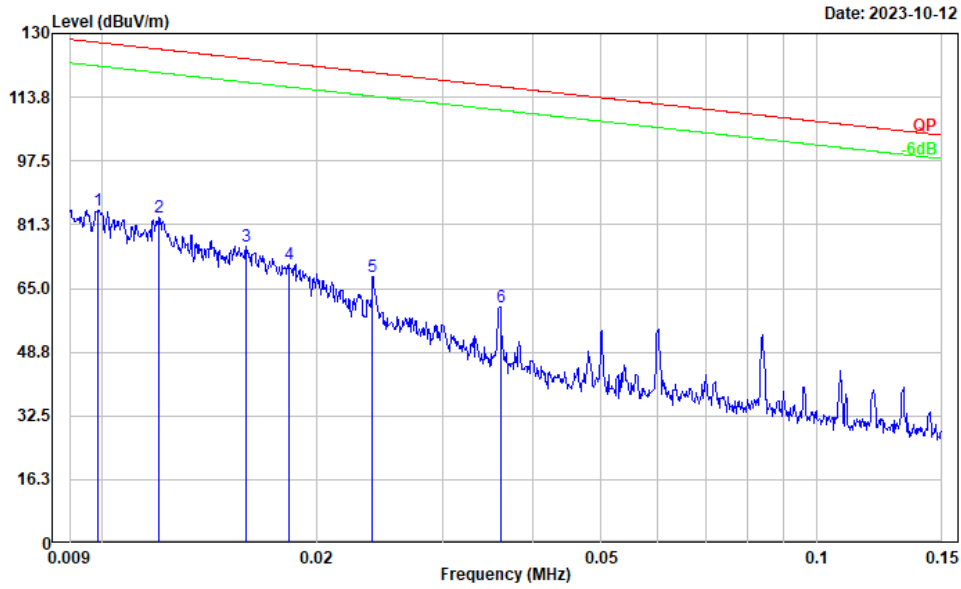

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.010	26.73	58.16	84.89	127.71	42.82	Peak
2	0.012	27.03	56.25	83.28	126.00	42.72	Peak
3	0.016	22.80	52.88	75.68	123.58	47.90	Peak
4	0.018	20.36	50.82	71.18	122.39	51.21	Peak
5	0.024	20.30	47.85	68.15	120.04	51.89	Peak
6	0.036	15.88	44.38	60.26	116.45	56.19	Peak


Project No.: CR230956480-RF
 Tester: Vic Du
 Polarization: Perpendicular
 Note:

Date: 2023-10-12

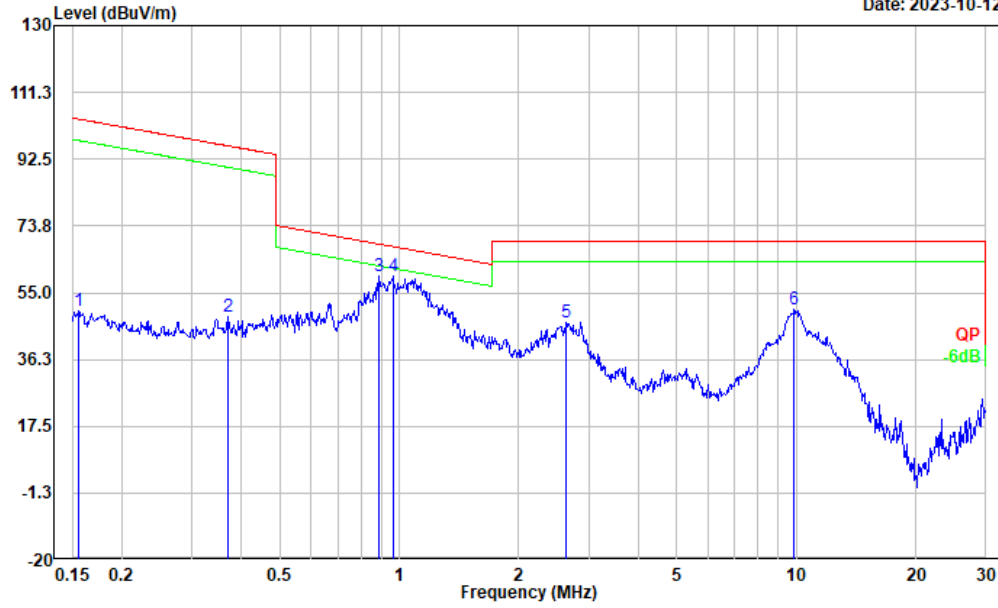

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	0.156	17.98	32.10	50.08	103.76	53.68	Peak
2	0.369	23.55	24.63	48.18	96.26	48.08	Peak
3	0.885	41.89	17.85	59.74	68.56	8.82	Peak
4	0.963	42.48	17.19	59.67	67.80	8.13	Peak
5	2.622	37.20	9.42	46.62	69.54	22.92	Peak
6	9.861	45.83	4.46	50.29	69.54	19.25	Peak


Project No.: CR230956480-RF
 Tester: Vic Du
 Polarization: Ground-parallel
 Note:

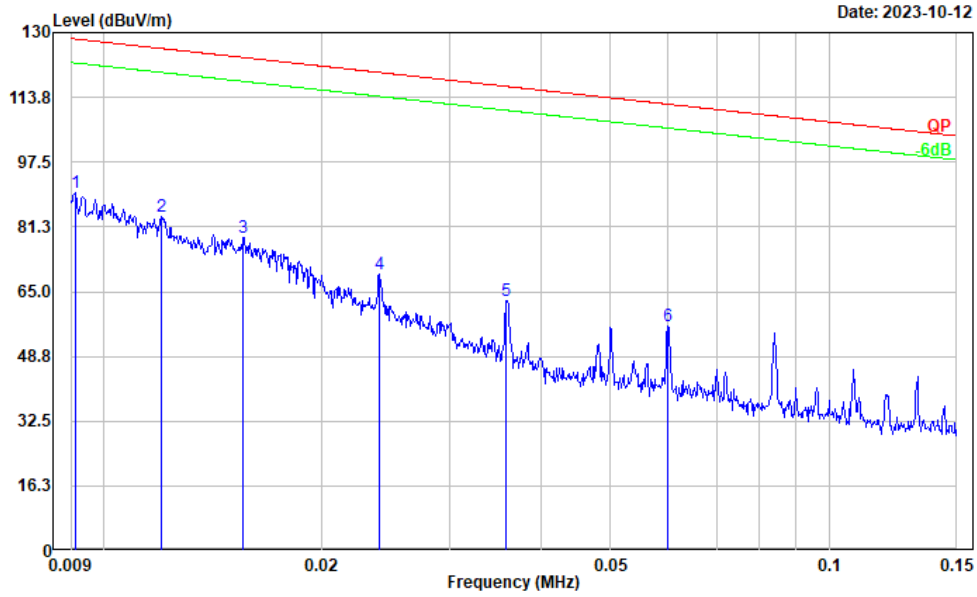

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.009	31.02	58.95	89.97	128.40	38.43	Peak
2	0.012	27.63	56.25	83.88	126.00	42.12	Peak
3	0.016	25.41	53.16	78.57	123.75	45.18	Peak
4	0.024	21.55	47.80	69.35	119.99	50.64	Peak
5	0.036	18.24	44.41	62.65	116.50	53.85	Peak
6	0.060	16.17	40.07	56.24	112.05	55.81	Peak

Project No.: CR230956480-RF
 Tester: Vic Du
 Polarization: Ground-parallel
 Note:

Date: 2023-10-12

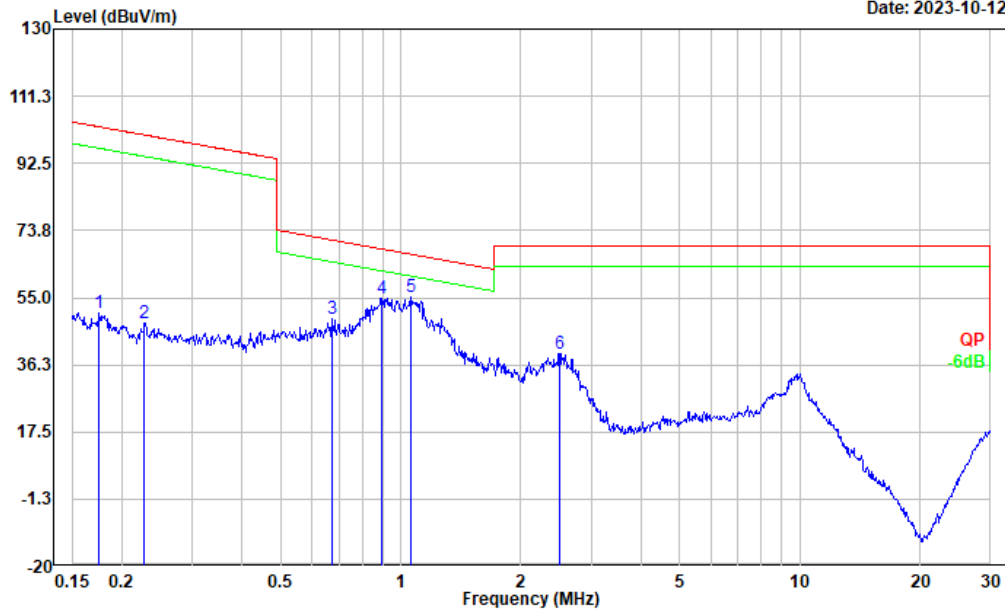


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.176	19.92	30.95	50.87	102.70	51.83	Peak
2	0.228	19.28	28.57	47.85	100.45	52.60	Peak
3	0.672	29.06	20.01	49.07	71.00	21.93	Peak
4	0.899	36.93	17.77	54.70	68.42	13.72	Peak
5	1.060	38.74	16.52	55.26	66.96	11.70	Peak
6	2.500	29.75	9.77	39.52	69.54	30.02	Peak

2) 30MHz-1GHz:

Project No.: CR230956480-RF
 Tester: Vic Du
 Polarization: horizontal
 Note:


Date: 2023-10-12

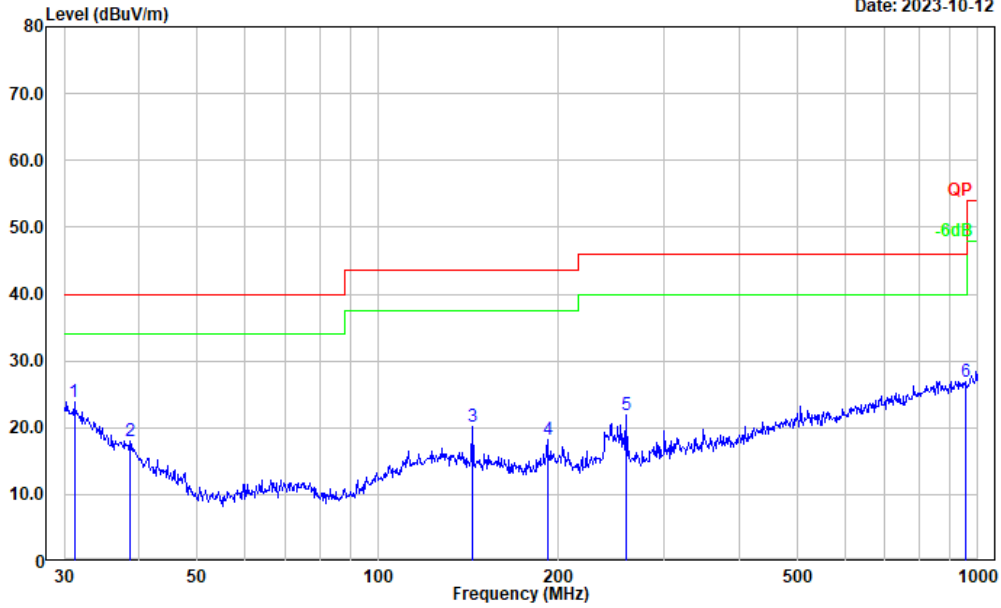

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.180	28.45	-4.50	23.95	40.00	16.05	Peak
2	38.616	28.29	-10.22	18.07	40.00	21.93	Peak
3	143.830	32.06	-11.96	20.10	43.50	23.40	Peak
4	191.745	31.38	-13.21	18.17	43.50	25.33	Peak
5	259.234	34.37	-12.48	21.89	46.00	24.11	Peak
6	955.438	27.03	-0.05	26.98	46.00	19.02	Peak

Project No.: CR230956480-RF
 Tester: Vic Du
 Polarization: vertical
 Note:

Date: 2023-10-12

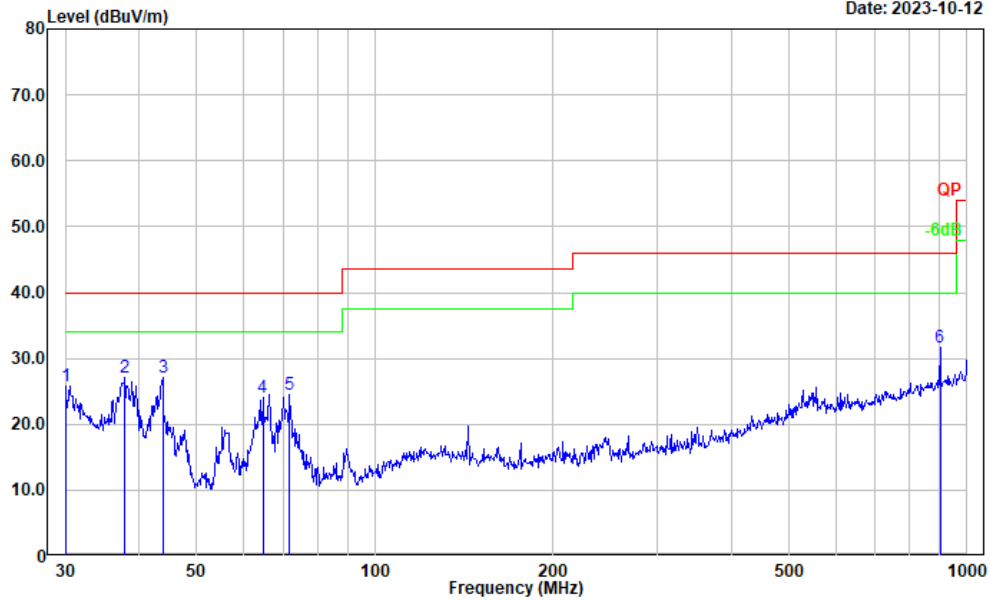

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	29.43	-3.60	25.83	40.00	14.17	Peak
2	37.812	36.65	-9.59	27.06	40.00	12.94	Peak
3	43.812	40.73	-13.56	27.17	40.00	12.83	Peak
4	64.659	41.08	-16.96	24.12	40.00	15.88	Peak
5	71.832	41.14	-16.66	24.48	40.00	15.52	Peak
6	900.147	32.71	-0.96	31.75	46.00	14.25	Peak

3) 1GHz-40GHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
16660.13	35.44	PK	H	23.65	59.09	74.00	14.91
16660.13	23.40	AV	H	23.65	47.05	54.00	6.95
14718.34	34.83	PK	V	24.73	59.56	74.00	14.44
14718.34	22.55	AV	V	24.73	47.28	54.00	6.72
24993.50	49.68	PK	H	6.78	56.46	74.00	17.54
24993.50	37.45	AV	H	6.78	44.23	54.00	9.77
25321.66	50.66	PK	V	6.68	57.34	74.00	16.66
25321.66	38.49	AV	V	6.68	45.17	54.00	8.83
39643.53	52.28	PK	H	9.60	61.88	74.00	12.14
39643.53	38.84	AV	H	9.60	48.44	54.00	5.58
39327.57	52.32	PK	V	10.19	62.51	74.00	11.51
39327.57	39.07	AV	V	10.19	49.26	54.00	4.76

3) 40GHz-231GHz:

Frequency (GHz)	Receiver		Polar (H/V)	Factor (dB/m)	Field Strength (dBμV/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)
	Reading (dBμV)						
48.590	60.43		H	40.13	100.56	333.08	600.00
48.590	58.81		V	40.13	98.94	229.38	600.00
72.590	59.69		H	43.87	103.56	664.58	600.00
72.590	56.76		V	43.87	100.63	338.49	600.00
92.050	51.53		H	45.36	96.89	35.77	600.00
92.050	51.00		V	45.36	96.36	31.66	600.00
219.280	58.20		H	52.36	110.56	832.70	1000.00
219.280	57.89		V	52.36	110.25	775.33	1000.00
221.520	46.47		H	52.46	98.93	57.21	1000.00
221.520	48.36		V	52.46	100.82	88.41	1000.00

Factor = Antenna Factor

Field Strength = Reading + Factor

EIRP (dBm) = Field Strength (dBμV/m) + 20log(D) - 104.8

D is the measurement distance

$$EIRP_{Linear} = 10^{[(EIRP_{Log} - 30)/10]}$$

where

$EIRP_{Linear}$ is the equivalent isotropically radiated power, in watts

$EIRP_{Log}$ is the equivalent isotropically radiated power, in dBm

$$PD = \frac{EIRP_{Linear}}{4\pi d^2}$$

where

PD is the power density at the distance specified by the limit, in W/m²

$EIRP_{Linear}$ is the equivalent isotropically radiated power, in watts


d is the distance at which the power density limit is specified, in m

The Specified distance is 3m.

Test plots
Horizontal:

Project No.: CR230956480-RF
 Tester: Mack Huang
 Polarization: horizontal
 Note:


Date: 2023-10-11

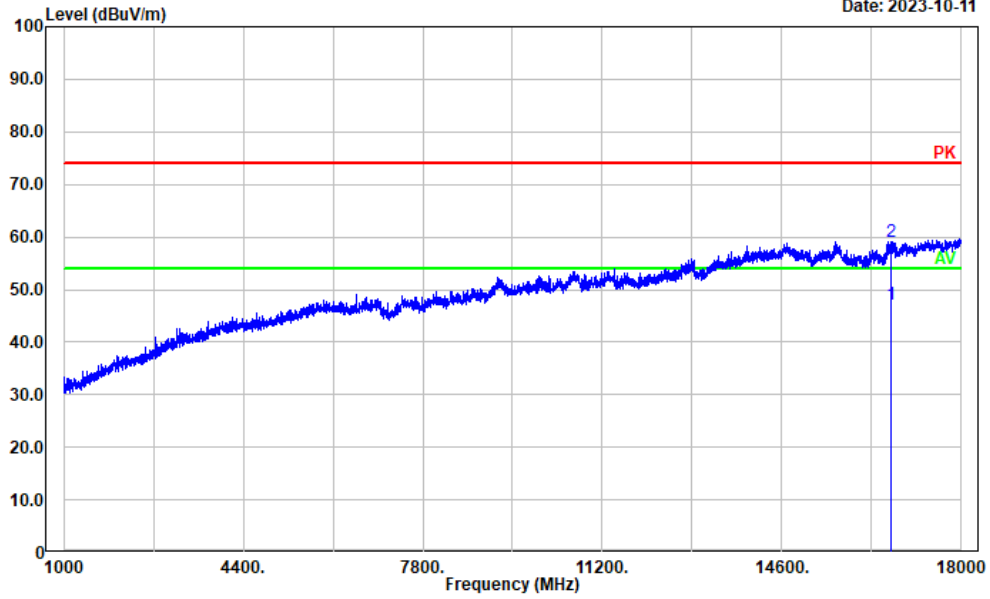

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	16660.130	23.40	23.65	47.05	54.00	6.95	Average
2	16660.130	35.44	23.65	59.09	74.00	14.91	Peak

Project No.: CR230956480-RF
 Tester: Mack Huang
 Polarization: horizontal
 Note:


Date: 2023-10-11

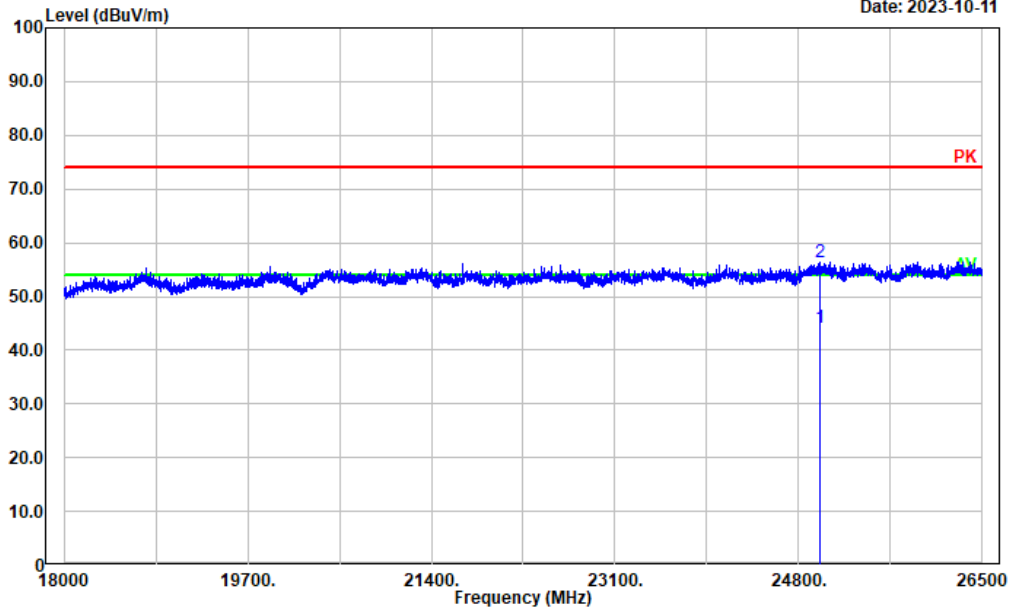

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	24993.500	37.45	6.78	44.23	54.00	9.77	Average
2	24993.500	49.68	6.78	56.46	74.00	17.54	Peak

Project No.: CR230956480-RF
 Tester: Mack Huang
 Polarization: horizontal
 Note:

Date: 2023-10-11

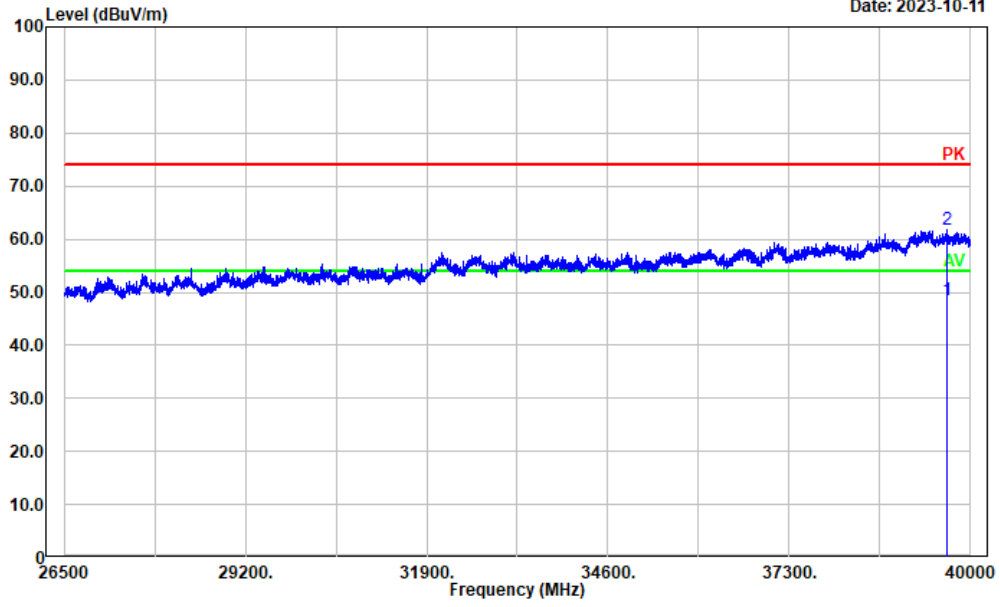


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	39643.530	38.84	9.60	48.44	54.00	5.56	Average
2	39643.530	52.28	9.60	61.88	74.00	12.12	Peak

Vertical:

Project No.: CR230956480-RF
 Tester: Mack Huang
 Polarization: vertical
 Note:


Date: 2023-10-11

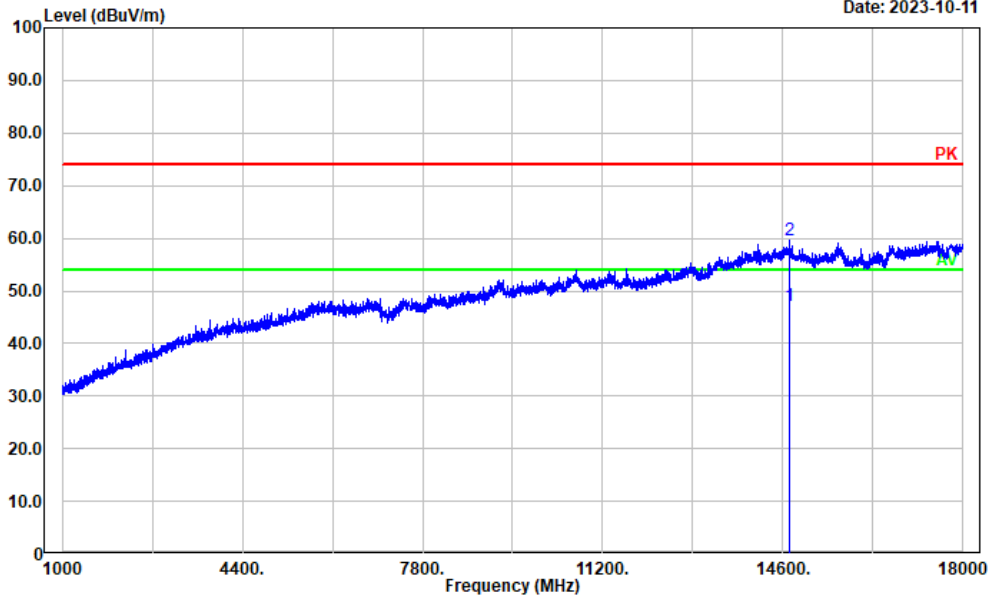

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	14718.340	22.55	24.73	47.28	54.00	6.72	Average
2	14718.340	34.83	24.73	59.56	74.00	14.44	Peak

Project No.: CR230956480-RF
 Tester: Mack Huang
 Polarization: vertical
 Note:


Date: 2023-10-11

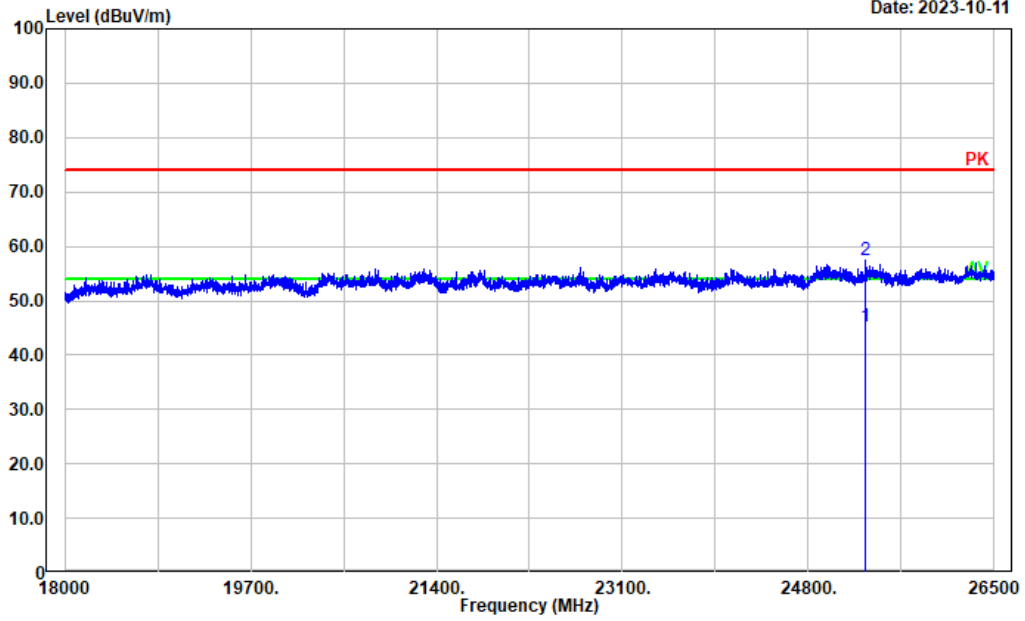

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	25321.660	38.49	6.68	45.17	54.00	8.83	Average
2	25321.660	50.66	6.68	57.34	74.00	16.66	Peak

Project No.: CR230956480-RF
 Tester: Mack Huang
 Polarization: vertical
 Note:

Date: 2023-10-11

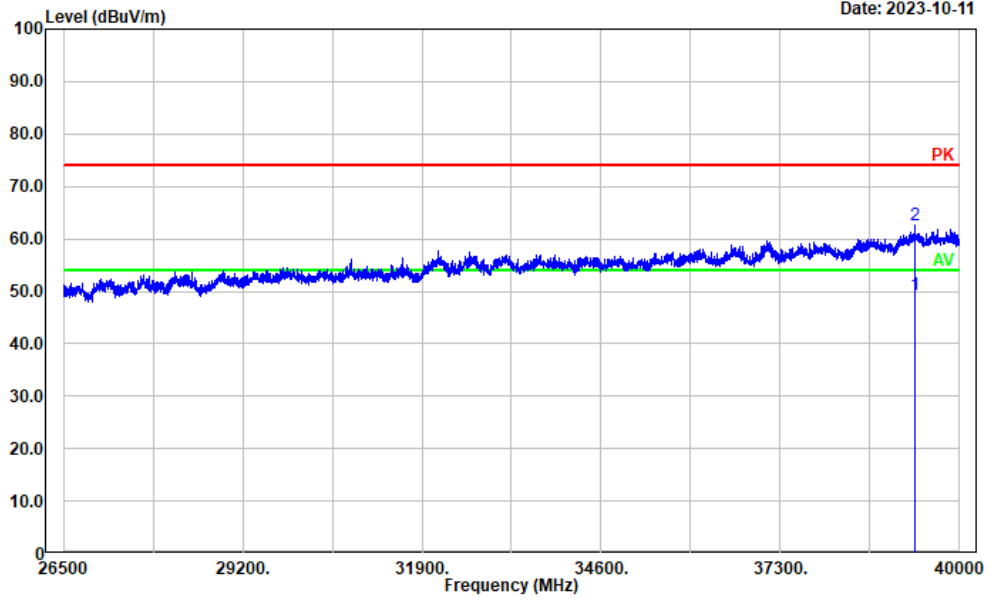

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	39327.570	39.07	10.19	49.26	54.00	4.74	Average
2	39327.570	52.32	10.19	62.51	74.00	11.49	Peak

4.3 Frequency Stability:

Serial Number:	2BOW-1	Test Date:	2023/10/12
Test Site:	RF	Test Mode:	Transmitting
Tester:	Mack Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.5	Relative Humidity: (%)	59	ATM Pressure: (kPa)	101.3
----------------------	------	---------------------------	----	---------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
OML	Harmonic Mixer	WR12/M12HWD	E60119-1	2020/10/17	2023/10/16
OML	Horn Antenna	M12RH	E60119-2	2020/10/18	2023/10/17
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

* **Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Temperature	Voltage	Frequency (GHz)			
		f _L	f _H	f _L Limit	f _H Limit
°C	V _{DC}				
-20	12	76.2978	76.9271	76	81
-10	12	76.2955	76.9311	76	81
0	12	76.2996	76.9335	76	81
10	12	76.2981	76.9332	76	81
20	12	76.2981	76.9298	76	81
30	12	76.2985	76.9299	76	81
40	12	76.2965	76.9293	76	81
50	12	76.3010	76.9275	76	81
20	9	76.3002	76.9285	76	81
20	16	76.3022	76.9280	76	81

4.4 Occupied Bandwidth:

Serial Number:	2BOW-1	Test Date:	2023/10/12
Test Site:	966-1	Test Mode:	Transmitting
Tester:	Mack Huang	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	26.8	Relative Humidity: (%)	57	ATM Pressure: (kPa)	101.3
----------------------	------	---------------------------	----	---------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
OML	Harmonic Mixer	WR12/M12HWD	E60119-1	2020/10/17	2023/10/16
OML	Horn Antenna	M12RH	E60119-2	2020/10/18	2023/10/17

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Frequency (GHz)	99% Occupied Bandwidth (MHz)
76.6	631.693

99% Emission Bandwidth

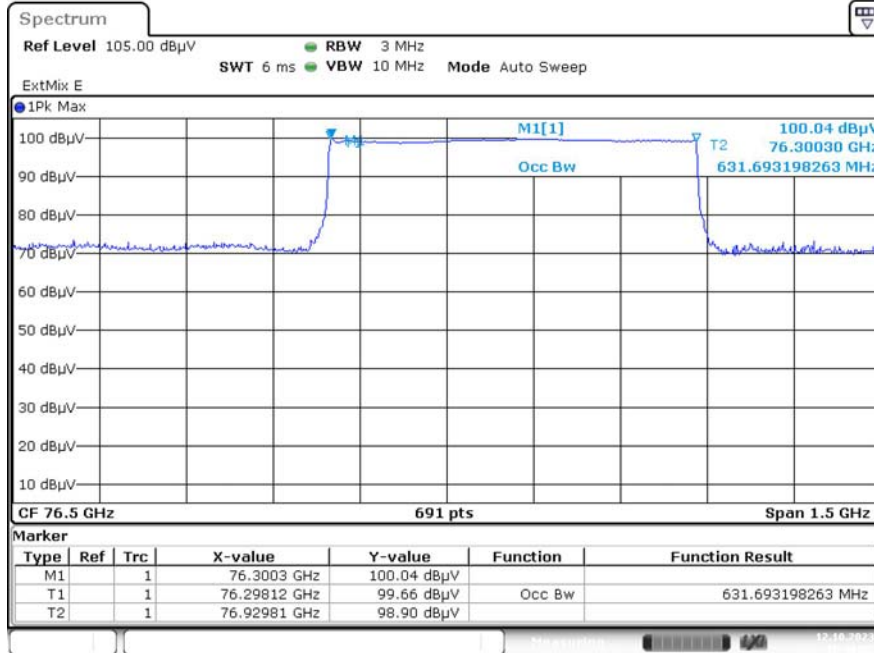

ProjectNo.:CR230956480-RFTester:Mack Huang
 Date: 12.OCT.2023 10:36:57

4.5 Duty Cycle:

Serial Number:	2BOW-1	Test Date:	2023/10/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Mack Huang	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	26.3	Relative Humidity: (%)	52	ATM Pressure: (kPa)	101.1
----------------------	------	---------------------------	----	---------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
OML	Harmonic Mixer	WR12/M12HWD	E60119-1	2020/10/17	2023/10/16
OML	Horn Antenna	M12RH	E60119-2	2020/10/18	2023/10/17

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Frequency (GHz)	Ton (ms)	Ton+off (ms)	Duty cycle (%)
76.6	7.88	66.03	11.94%

Duty Cycle

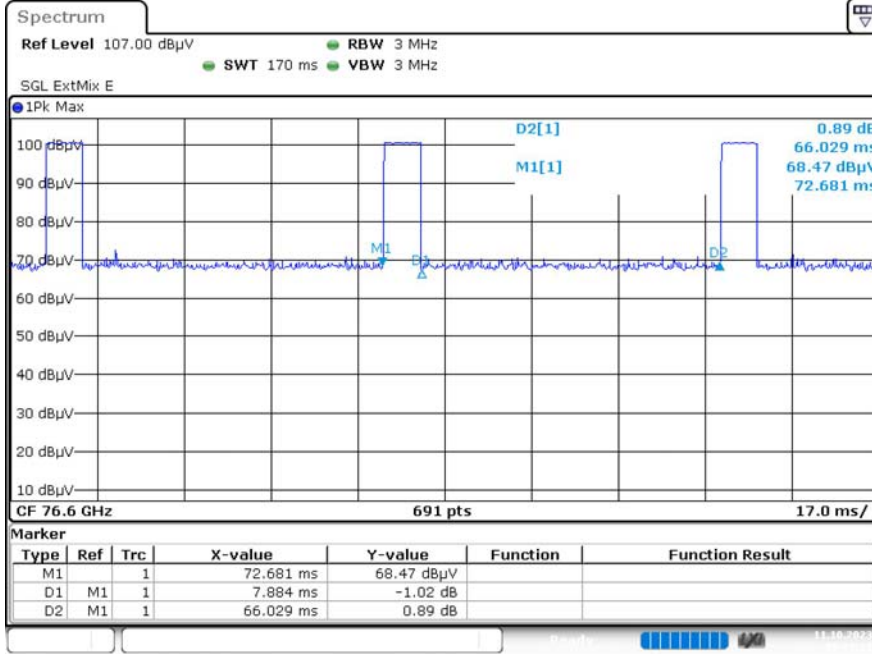

ProjectNo.:CR230956480-RF Tester:Mack Huang

Date: 11.OCT.2023 19:12:11

5. RF EXPOSURE EVALUATION

5.1 MAXIMUM PERMISSIBLE EXPOSURE (MPE)

5.1.1 Applicable Standard

FCC §95.3385 & §1.1310 & §2.1091

Regardless of the power density levels permitted under this subpart, devices operating under the provisions of this subpart are subject to the radiofrequency radiation exposure requirements specified in §§ 1.1307(b), 2.1091, and 2.1093 of this chapter, as appropriate. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §1.1307(b)(1) of this chapter.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

5.1.2 Procedure

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

5.2 Measurement Result

Frequency (GHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
76.3-76.93	15.00	31.62	30	1000	55	0.8318	1

Result: The device meet FCC MPE at 55 cm distance.

6. EUT PHOTOGRAPHS

Please refer to the attachment CR230956480-EXP EUT EXTERNAL PHOTOGRAPHS and CR230956480-INP EUT INTERNAL PHOTOGRAPHS

7. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR230956480-00B-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====