



CFR 47 FCC PART 15 SUBPART E

TEST REPORT

For

CAR MULTIMEDIA

MODEL NUMBER: M3GL06L, M3GL06R

FCC ID: 2AEQT-M3GL06L

REPORT NUMBER: 4790583817-RF-4

ISSUE DATE: March 24, 2023

Prepared for

**Huizhou Desay SV Automotive Co., Ltd.
NO.103, Hechang 5th Road West, Zhongkai National Hi-tech Industrial
Development Zone, Huizhou, Guangdong, P.R. China**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	March 24, 2023	Initial Issue	

**Summary of Test Results**

Test Item	Clause	Limit/Requirement	Result
ON TIME AND DUTY CYCLE	ANSI C63.10-2013, Clause 12.2	None; for reporting purposes only.	Pass
6dB AND 26dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH	KDB 789033 D02 v02r01 Section C.1	FCC Part 15.407 (a)/(e),	Pass
CONDUCTED OUTPUT POWER	KDB 789033 D02 v02r01 Section E.3.a (Method PM)	FCC 15.407 (a)	Pass
POWER SPECTRAL DENSITY	KDB 789033 D02 v02r01 Section F	FCC 15.407 (a)	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2.	FCC 15.207	Not Applicable (See Note ***)
Radiated Emissions and Band Edge Measurement	KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6	FCC 15.407 (b) FCC 15.209 FCC 15.205	Pass
FREQUENCY STABILITY	/	FCC 15.407 (g)	Pass
Antenna Requirement	N/A	FCC 47 CFR Part 15.203 15.407(a)(1) (2),	Pass

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

**The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART E and ISED RSS-247 ISSUE 2> when <Accuracy Method> decision rule is applied.

*** The EUT is an In-Vehicle devices.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	6
2. TEST METHODOLOGY.....	7
3. FACILITIES AND ACCREDITATION.....	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>CHANNEL LIST</i>	<i>9</i>
5.3. <i>MAXIMUM OUTPUT POWER.....</i>	<i>10</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>11</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>12</i>
5.7. <i>THE WORSE CASE CONFIGURATIONS.....</i>	<i>12</i>
5.8. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>13</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	14
7. ANTENNA PORT TEST RESULTS	16
7.1. <i>ON TIME AND DUTY CYCLE.....</i>	<i>16</i>
7.2. <i>6DB AND 26DB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH ...</i>	<i>17</i>
7.3. <i>CONDUCTED OUTPUT POWER.....</i>	<i>19</i>
7.4. <i>POWER SPECTRAL DENSITY</i>	<i>21</i>
7.5. <i>FREQUENCY STABILITY.....</i>	<i>23</i>
8. RADIATED TEST RESULTS.....	25
8.1. <i>RESTRICTED BANDEDGE</i>	<i>34</i>
8.2. <i>SPURIOUS EMISSIONS (1 GHZ ~ 7 GHZ)</i>	<i>55</i>
8.3. <i>SPURIOUS EMISSIONS (7 GHZ ~ 18 GHZ)</i>	<i>67</i>
8.4. <i>SPURIOUS EMISSIONS (9 KHZ ~ 30 MHZ).....</i>	<i>103</i>
8.5. <i>SPURIOUS EMISSIONS (18 GHZ ~ 26 GHZ)</i>	<i>106</i>
8.6. <i>SPURIOUS EMISSIONS (26 GHZ ~ 40 GHZ)</i>	<i>108</i>
8.7. <i>SPURIOUS EMISSIONS (30 MHZ ~ 1 GHZ)</i>	<i>110</i>
9. ANTENNA REQUIREMENT	112



10.	TEST DATA.....	113
10.1.	<i>APPENDIX A: EMISSION BANDWIDTH.....</i>	<i>113</i>
10.1.1.	Test Result.....	113
10.1.2.	Test Graphs.....	114
10.2.	<i>APPENDIX B: OCCUPIED CHANNEL BANDWIDTH.....</i>	<i>120</i>
10.2.1.	Test Result.....	120
10.2.2.	Test Graphs.....	121
10.3.	<i>APPENDIX C: MIN EMISSION BANDWIDTH.....</i>	<i>127</i>
10.3.1.	Test Result.....	127
10.3.2.	Test Graphs.....	128
10.4.	<i>APPENDIX D: MAXIMUM OUTPUT POWER.....</i>	<i>131</i>
10.4.1.	Test Result.....	131
10.5.	<i>APPENDIX E: MAXIMUM POWER SPECTRAL DENSITY.....</i>	<i>132</i>
10.5.1.	Test Result.....	132
10.5.2.	Test Graphs.....	133
10.6.	<i>APPENDIX F: FREQUENCY STABILITY.....</i>	<i>139</i>
10.6.1.	Test Result.....	139
10.7.	<i>APPENDIX G: DUTY CYCLE.....</i>	<i>140</i>
10.7.1.	Test Result.....	140
10.7.2.	Test Graphs.....	141
.....		142



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Huizhou Desay SV Automotive Co., Ltd.
 Address: NO.103, Hechang 5th Road West, Zhongkai National Hi-tech Industrial Development Zone, Huizhou, Guangdong, P.R. China

Manufacturer Information

Company Name: Huizhou Desay SV Automotive Co., Ltd.
 Address: NO.103, Hechang 5th Road West, Zhongkai National Hi-tech Industrial Development Zone, Huizhou, Guangdong, P.R. China

EUT Information

EUT Name: CAR MULTIMEDIA
 Model: M3GL06L, M3GL06R
 Model Difference: The difference lies only the touch screen buttons of the front panel of the host are opposite, and the front panel Layout is opposite for these two models.
 Brand: DESAY SV
 Sample Received Date: February 7, 2023
 Sample ID: 5766290
 Date of Tested: February 15, 2023 to March 24, 2023

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART E	PASS

Prepared By:

Denny Huang
 Senior Project Engineer

Checked By:

Kebo Zhang
 Senior Project Engineer

Approved By:

Stephen Guo
 Operations Manager



2. TEST METHODOLOGY

All tests were performed in accordance with the standard ANSI C63.10-2013, CFR 47 FCC Part 2, CFR 47 FCC Part 15, KDB 789033 D02 v02r01, KDB414788 D01 Radiated Test Site v01, KDB 662911 D01 Multiple Transmitter Output v02r01.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
Emission Bandwidth and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.766 dB
Maximum Power Spectral Density Level	±1.22 dB
Frequency Stability	±2.76%
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	CAR MULTIMEDIA
Model	M3GL06L, M3GL06R
Model Difference:	The difference lies only the touch screen buttons of the front panel of the host are opposite, and the front panel Layout is opposite for these two models. Pre-scan had been done for both the two models and only the worst case data (M3GL06L) was recorded in the report.
Radio Technology	WLAN (IEEE 802.11a/n HT20/n HT40/ac VHT20/VHT 40/VHT 80)
Operation Frequency	UNII-1: 5150 ~ 5250 MHz UNII-3: 5725 ~ 5850 MHz
Modulation	IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT20: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT40: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT80: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Ratings	DC 12 V

5.2. CHANNEL LIST

UNII-1 (For Bandwidth=20MHz)		UNII-1 (For Bandwidth=40MHz)		UNII-1 (For Bandwidth=80MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

UNII-3 (For Bandwidth=20MHz)		UNII-3 (For Bandwidth=40MHz)		UNII-3 (For Bandwidth=80MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				



5.3. MAXIMUM OUTPUT POWER

UNII-1 BAND

IEEE Std. 802.11	Frequency (MHz)	Maximum Average Conducted Power (dBm)	Max Average EIRP (dBm)
a	5150 ~ 5250	15.22	16.27
n HT20		14.91	15.96
n HT40		15.52	16.57
ac VHT80		14.58	15.63

UNII-3 BAND

IEEE Std. 802.11	Frequency (MHz)	Maximum Average Conducted Power (dBm)
a	5725 ~ 5850	15.24
n HT20		14.54
n HT40		15.04
ac VHT80		13.46

5.4. TEST CHANNEL CONFIGURATION

UNII-1 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 36(Low Channel), CH 40(MID Channel), CH 48(High Channel)	5180 MHz, 5200 MHz, 5240 MHz
802.11n HT20	CH 36(Low Channel), CH 40(MID Channel), CH 48(High Channel)	5180 MHz, 5200 MHz, 5240 MHz
802.11n HT40	CH 38(Low Channel), CH 46(High Channel)	5190 MHz, 5230 MHz
802.11ac VHT80	CH 42(Low Channel)	5210 MHz

UNII-3 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 149(Low Channel), CH 157(MID Channel), CH 165(High Channel)	5745 MHz, 5785 MHz, 5825 MHz
802.11n HT20	CH 149(Low Channel), CH 157(MID Channel), CH 165(High Channel)	5745 MHz, 5785 MHz, 5825 MHz
802.11n HT40	CH 151(Low Channel), CH 159(High Channel)	5755MHz, 5795MHz
802.11ac VHT80	CH 155(Low Channel)	5775 MHz

**5.5. THE WORSE CASE POWER SETTING PARAMETER**

The Worse Case Power Setting Parameter	
Test Software	adb

UNII-1

Mode	Rate	Channel	Soft set value
			ANT 1
11a	6M	36	20
		40	20
		48	20
11ac VHT20	MCS0	36	20
		40	20
		48	20
11ac VHT40	MCS0	38	18
		46	18
11ac VHT80	MCS0	42	19

UNII-3

Mode	Rate	Channel	Soft set value
			ANT1
11a	6M	149	20
		157	20
		165	20
11ac VHT20	MCS0	149	18
		157	20
		165	20
11ac VHT40	MCS0	151	16
		159	17
11ac VHT80	MCS0	155	20

Note: 802.11n HT20 mode and 802.11n HT40 were covered by 802.11ac VHT20.



5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna No.	Frequency Band	Antenna Type	Maximum Antenna Gain (dBi)
1	5150-5850	PCB	1.049

IEE Std. 802.11	Transmit and Receive Mode	Description
802.11a20	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
802.11n HT20	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
802.11n HT40	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
802.11ac VHT20	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
802.11ac VHT40	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
802.11ac VHT80	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.

Note: The value of the antenna gain was declared by customer.

5.7. THE WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.6.

Worst case Data Rates declared by the customer:

802.11a 20 mode: 6 Mbps

802.11n HT20 mode: MCS0

802.11n HT40 mode: MCS0

802.11ac VHT20 mode: MCS0

802.11ac VHT40 mode: MCS0

802.11ac VHT80 mode: MCS0

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	XIAOXIN 5000	/
2	UART	/	/	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	DC	/	/	1	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

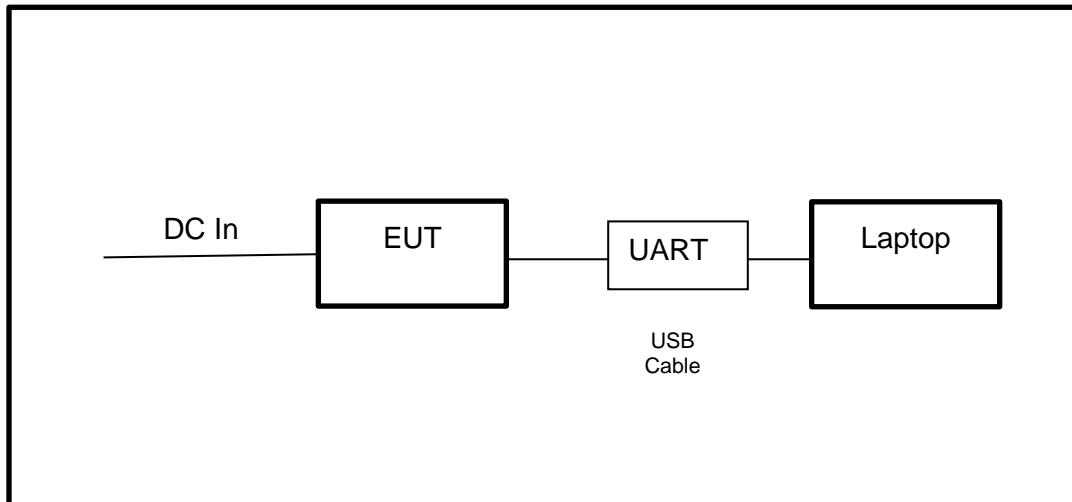

**6. MEASURING EQUIPMENT AND SOFTWARE USED**

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Apr.02,2022	Apr.01,2023
Vector Signal Generator	R&S	SMBV100A	261637	Oct.17, 2022	Oct.16, 2023
Signal Generator	R&S	SMB100A	178553	Oct.17, 2022	Oct.16, 2023
Signal Analyzer	R&S	FSV40	101118	Oct.17, 2022	Oct.16, 2023
Software					
Description	Manufacturer	Name		Version	
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32		10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.17, 2022	Oct.16, 2023
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.28, 2022	Sep.27, 2023
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.17, 2022	Oct.16, 2023
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.17, 2022	Oct.16, 2023
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.17, 2022	Oct.16, 2023
DC power supply	Keysight	E3642A	MY55159130	Oct.17, 2022	Oct.16, 2023
Attenuator	Agilent	8495B	2814a12853	Oct.18, 2022	Oct.17, 2023
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		2.6.77.0518	



Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.17, 2022	Oct.16, 2023
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.17, 2022	Oct.16, 2023
EMI Measurement Receiver	R&S	ESR26	101377	Oct.17, 2022	Oct.16, 2023
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.17, 2022	Oct.16, 2023
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.17, 2022	Oct.16, 2023
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.17, 2022	Oct.16, 2023
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.17, 2022	Oct.16, 2023
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01202035	Oct.17, 2022	Oct.16, 2023
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	/	/
Band Reject Filter	Wainwright	WRCJV12-5695-5725-5850-5880-40SS	4	/	/
Band Reject Filter	Wainwright	WRCJV20-5120-5150-5350-5380-60SS	2	/	/
Band Reject Filter	Wainwright	WRCJV20-5440-5470-5725-5755-60SS	1	/	/
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1



7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE

LIMITS


None; for reporting purposes only.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.B.

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq EBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST SETUP

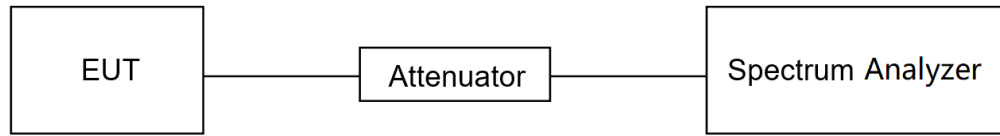

TEST ENVIRONMENT

Temperature	25.1 °C	Relative Humidity	51.2%
Atmosphere Pressure	101 kPa	Test Voltage	DC 12 V

TEST RESULTS

Please refer to section "Test Data" - Appendix G

7.2. 6DB AND 26DB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
26 dB Emission Bandwidth	For reporting purposes only.	5150 ~ 5250
26 dB Emission Bandwidth	For reporting purposes only.	5250 ~ 5350
26 dB Emission Bandwidth	For reporting purposes only.	5470 ~ 5725 (For FCC) 5470 ~ 5600 (For ISED) 5650 ~ 5725 (For ISED)
6 dB Emission Bandwidth	The minimum 6 dB emission bandwidth shall be 500 kHz.	5725 ~ 5850
99 % Occupied Bandwidth	For reporting purposes only.	5150 ~ 5825 (For ISED)

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.C1. for 26 dB Emission Bandwidth; section II.C2. for 6 dB Emission Bandwidth; section II.D. for 99 % Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Emission Bandwidth: RBW=100 kHz For 26 dB Emission bandwidth: approximately 1 % of the EBW. For 99 % Occupied Bandwidth: approximately 1 % ~ 5 % of the OBW.
VBW	For 6 dB Bandwidth: $\geq 3 \times \text{RBW}$ For 26 dB Bandwidth: $> 3 \times \text{RBW}$ For 99 % Bandwidth: $> 3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple

- Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.
- Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6/26 dB relative to the maximum level measured in the fundamental emission.

Calculation for 99 % Bandwidth of UNII-2C and UNII-3 Straddle Channel:

For Example: Fundamental Frequency: 5720 MHz

99 % OBW: 21.00 MHz

Turning Frequency: 5725 MHz

99 % Bandwidth of UNII-2C Band Portion = $(5725 - (5720 - (21.00/2))) = 15.50 \text{ MHz}$



99 % Bandwidth of UNII-3 Band Portion = $(5720+(21.00/2)-5725) = 5.50$ MHz

Calculation for 26 dB Bandwidth of UNII-2C Straddle Channel:

For Example: Fundamental frequency: 5720 MHz

26 dB BW: 20.00 MHz

FL: 5710.16 MHz

FH: 5730.16 MHz

Turning Frequency: 5725 MHz

26 dB Bandwidth of UNII-2C Band Portion = $5725-5710.16=14.84$ MHz

Calculation for 6dB Bandwidth of UNII-3 Straddle Channel:

For Example: Fundamental frequency: 5720 MHz

6 dB BW: 16.44 MHz


FL: 5711.76 MHz

FH: 5728.2 MHz

Turning Frequency: 5725 MHz

6 dB Bandwidth of UNII-3 band Portion = $5728.2-5725=3.2$ MHz

TEST SETUP

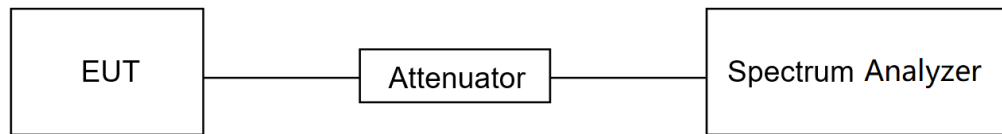

TEST ENVIRONMENT

Temperature	25.1 °C	Relative Humidity	51.2%
Atmosphere Pressure	101 kPa	Test Voltage	DC 12 V

TEST RESULTS

Please refer to section "Test Data" - Appendix A&B&C

7.3. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	<input type="checkbox"/> Outdoor Access Point: 1 W (30 dBm) <input type="checkbox"/> Indoor Access Point: 1 W (30 dBm) <input type="checkbox"/> Fixed Point-To-Point Access Points: 1 W (30 dBm) <input checked="" type="checkbox"/> Client Devices: 250 mW (24 dBm)	5150 ~ 5250
	Shall not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.	5250 ~ 5350 5470 ~ 5725
	Shall not exceed 1 Watt (30 dBm).	5725 ~ 5850

Note:

The above limits are based upon the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.E.

Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep):

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW \geq 3 MHz.
- (iv) Number of points in sweep $\geq 2 \times$ span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.
- (vi) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 %, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle \geq 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
- (viii) Trace average at least 100 traces in power averaging (rms) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

Method PM (Measurement using an RF average power meter):


(i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:

- a. The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
- b. At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
- c. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

(ii) If the transmitter does not transmit continuously, measure the duty cycle, x , of the transmitter output signal as described in II.B.

(iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

(iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25 %).

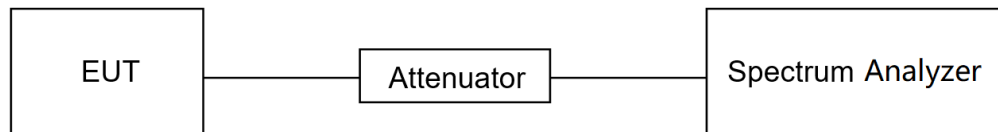TEST SETUP**TEST ENVIRONMENT**

Temperature	25.1 °C	Relative Humidity	51.2%
Atmosphere Pressure	101 kPa	Test Voltage	DC 12 V

TEST RESULTS

Please refer to section "Test Data" - Appendix D

7.4. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	<input type="checkbox"/> Outdoor Access Point: 17 dBm/MHz <input type="checkbox"/> Indoor Access Point: 17 dBm/MHz <input type="checkbox"/> Fixed Point-To-Point Access Points: 17 dBm/MHz <input checked="" type="checkbox"/> Client Devices: 11 dBm/MHz	5150 ~ 5250
	11 dBm/MHz	5250 ~ 5350 5470 ~ 5725
	30 dBm/500kHz	5725 ~ 5850

Note:

The above limits are based upon the maximum antenna gain does not exceed 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.F.

Connect the EUT to the spectrum analyzer and use the following settings:

For U-NII-1, U-NII-2A and U-NII-2C band:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	1 MHz
VBW	$\geq 3 \times$ RBW
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto


For U-NII-3:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	500 kHz
VBW	$\geq 3 \times$ RBW
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto



Allow trace to fully stabilize and Use the peak search function on the instrument to find the peak of the spectrum and record its value.
Add $10 \log (1/x)$, where x is the duty cycle, to the peak of the spectrum, the result is the Maximum PSD over 1 MHz / 500 kHz reference bandwidth.

TEST SETUP

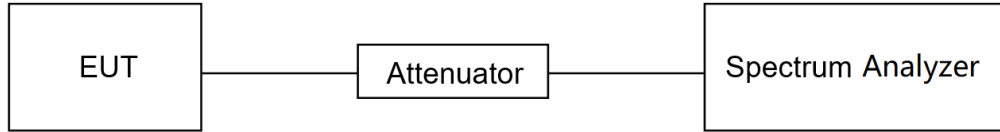

TEST ENVIRONMENT

Temperature	25.1 °C	Relative Humidity	51.2%
Atmosphere Pressure	101 kPa	Test Voltage	DC 12 V

TEST RESULTS

Please refer to section "Test Data" - Appendix E



7.5. FREQUENCY STABILITY

LIMITS

The frequency of the carrier signal shall be maintained within band of operation.

TEST PROCEDURE

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C ~ 40 °C (declared by customer).

2. The temperature was incremented by 10 °C intervals and the unit allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.

3. The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Connect the EUT to the spectrum analyzer and use the following settings:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	10 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

4. While maintaining a constant temperature inside the environmental chamber, turn the EUT on and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized.

5. Allow the trace to stabilize, find the peak value of the power envelope and record the frequency, then calculated the frequency drift.

TEST ENVIRONMENT

	Normal Test Conditions	Extreme Test Conditions
Relative Humidity	20 % - 75 %	/
Atmospheric Pressure	100 kPa ~102 kPa	/
Temperature	T_N (Normal Temperature): 25.1 °C	T_L (Low Temperature): 0 °C
		T_H (High Temperature): 40 °C
Supply Voltage	V_N (Normal Voltage): DC 12 V	V_L (Low Voltage): DC 10.2 V
		V_H (High Voltage): DC 13.8 V

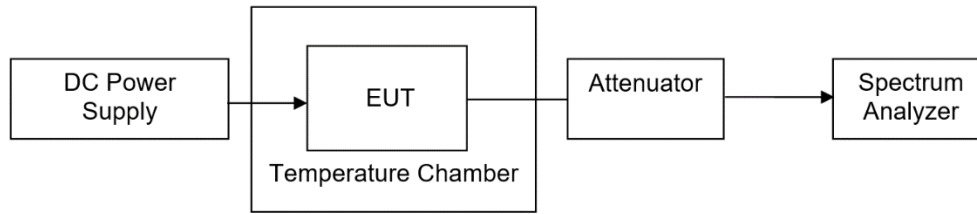TEST SETUP**TEST ENVIRONMENT**

Temperature	25.1 °C	Relative Humidity	51.2%
Atmosphere Pressure	101 kPa	Test Voltage	DC 12 V

TEST RESULTS

Please refer to section "Test Data" - Appendix F

8. RADIATED TEST RESULTS

LIMITS

Refer to CFR 47 FCC §15.205, §15.209 and §15.407 (b).

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c



Limits of unwanted/undesirable emission out of the restricted bands refer to CFR 47 FCC §15.407 (b) and ISED RSS-247 6.2.

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1GHz)		
Frequency Range (MHz)	EIRP Limit	Field Strength Limit (dBuV/m) at 3 m
5150~5250 MHz	PK: -27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz		
5470~5725 MHz		
5725~5850 MHz	PK: -27 (dBm/MHz) *1 PK: 10 (dBm/MHz) *2 PK: 15.6 (dBm/MHz) *3 PK: 27 (dBm/MHz) *4	PK: 68.2(dBμV/m) *1 PK: 105.2 (dBμV/m) *2 PK: 110.8(dBμV/m) *3 PK: 122.2 (dBμV/m) *4
<p>Note:</p> <p>*1 beyond 75 MHz or more above of the band edge.</p> <p>*2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.</p> <p>*3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.</p> <p>*4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.</p>		

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.



Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.



Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.G.3 ~ II.G.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes, channels and antennas have been tested, only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes, channels and antennas have been tested, only the worst data was recorded in the report.

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes, channels and antennas have been tested, only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 7 GHz):

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.
9. All modes, channels and antennas have been tested, only the worst data was recorded in the report.



For Radiate Spurious Emission (7 GHz ~ 18 GHz):

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.
9. All modes, channels and antennas have been tested, only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):

Note:


1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes, channels and antennas have been tested, only the worst data was recorded in the report.

For Radiate Spurious emission (26 GHz ~ 40 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes, channels and antennas have been tested, only the worst data was recorded in the report.


TEST SETUP

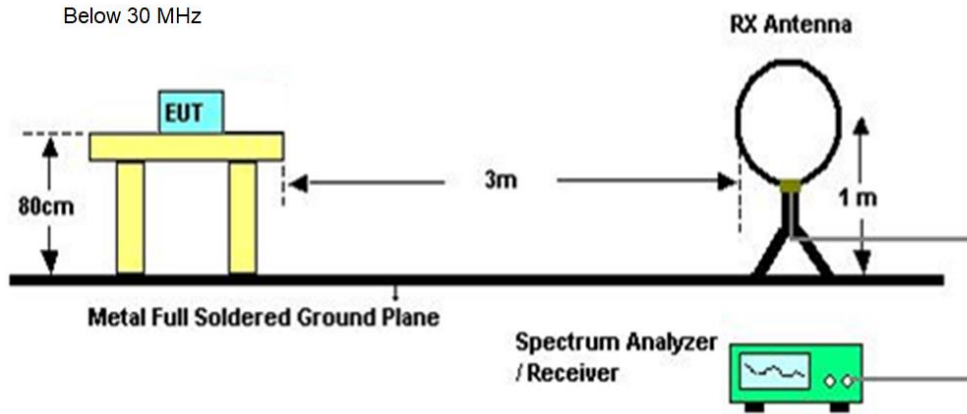

Below 1 GHz and above 30 MHz

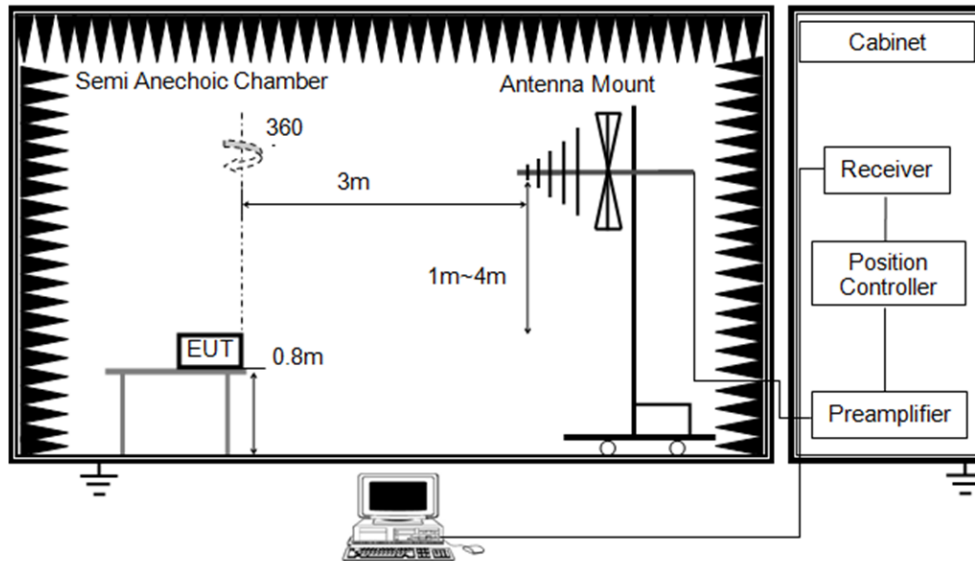

Above 1 GHz

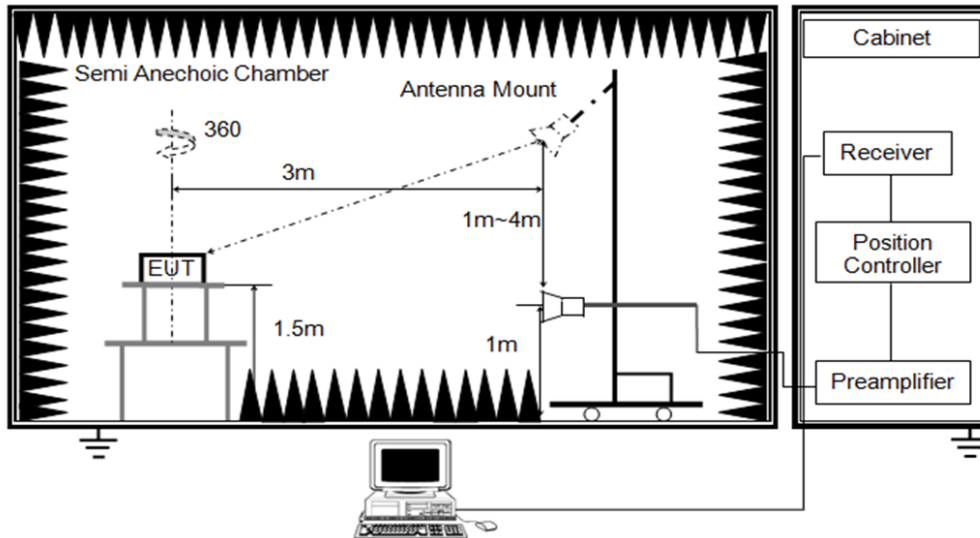



TEST ENVIRONMENT


Temperature	25.2°C	Relative Humidity	67%
Atmosphere Pressure	101kPa	Test Voltage	

TEST RESULTS



8.1. RESTRICTED BANDEDGE


Test Mode:	802.11a 20 Peak	Channel:	5180 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

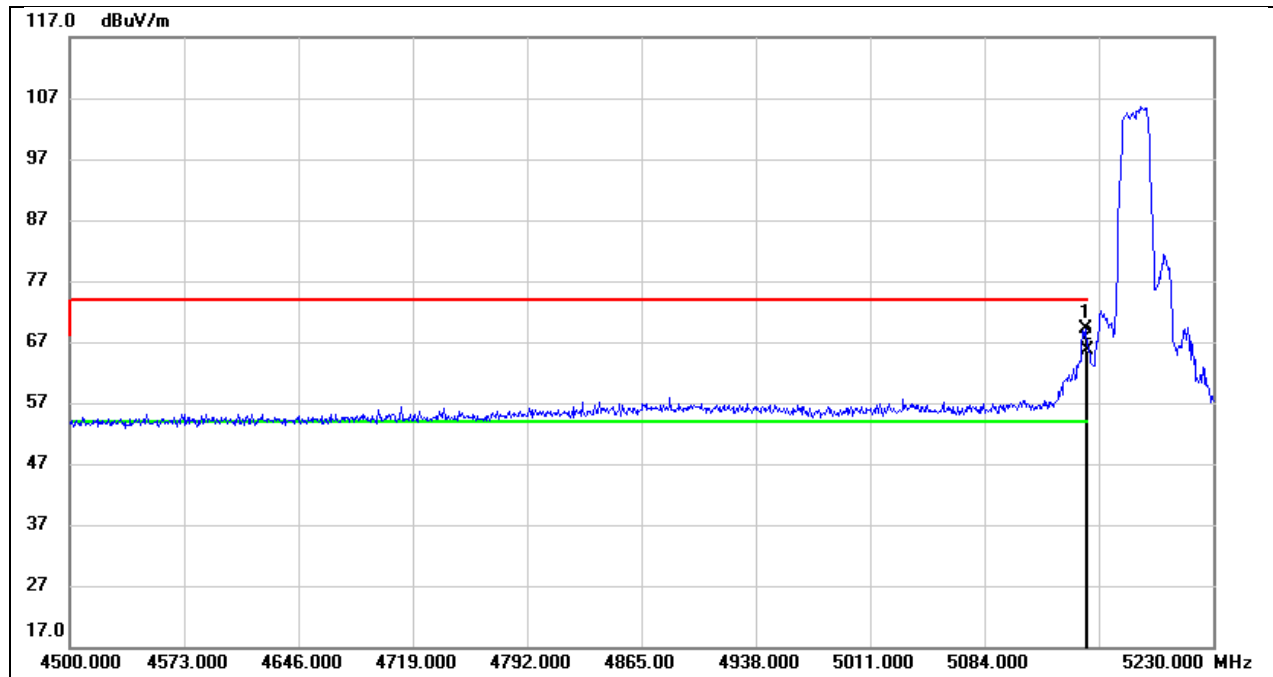

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.240	28.82	40.28	69.10	74.00	-4.90	peak
2	5150.000	25.43	40.27	65.70	74.00	-8.30	peak




Test Mode:	802.11a 20 Average	Channel:	5180 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

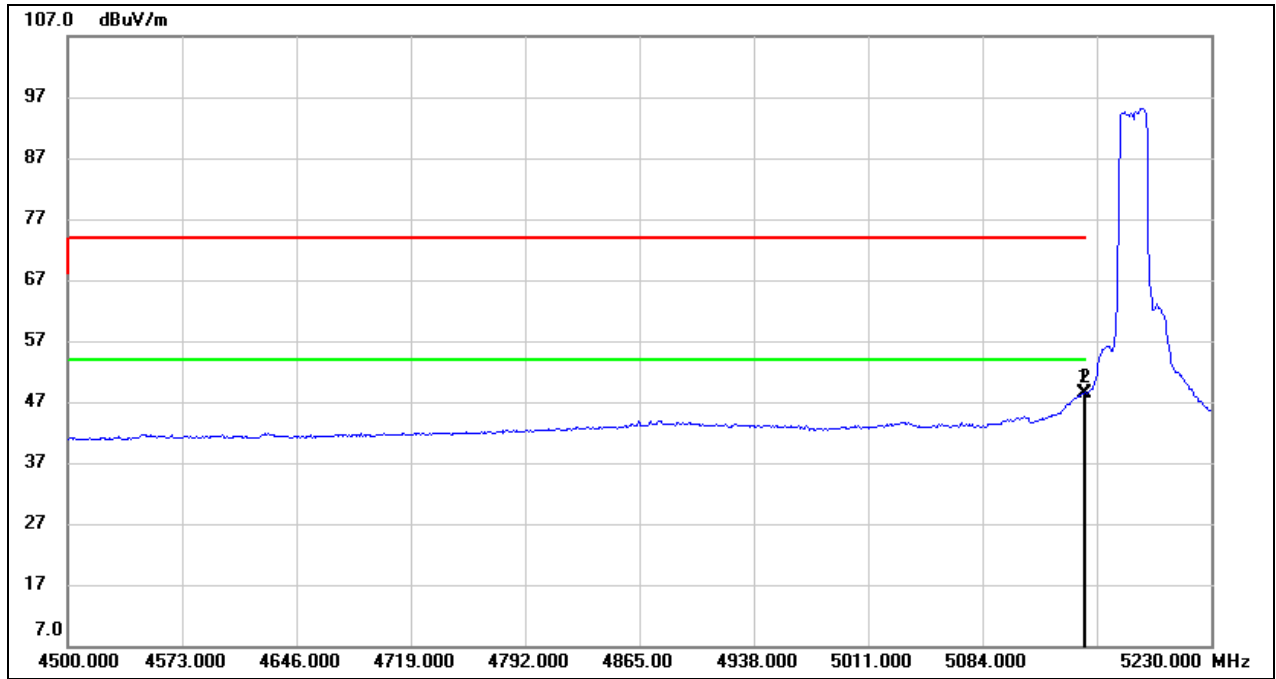

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.240	8.08	40.28	48.36	54.00	-5.64	AVG
2	5150.000	8.12	40.27	48.39	54.00	-5.61	AVG




Test Mode:	802.11a 20 Peak	Channel:	5240 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

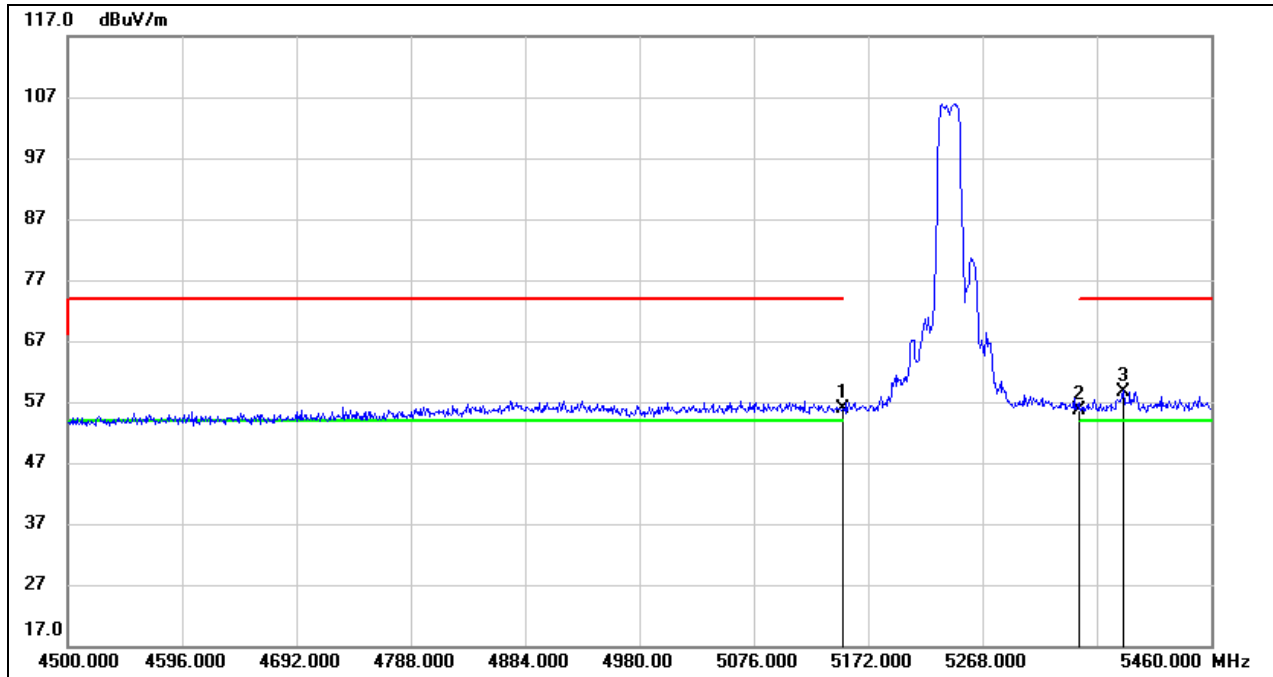

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	15.54	40.27	55.81	74.00	-18.19	peak
2	5350.000	15.05	40.49	55.54	74.00	-18.46	peak
3	5386.080	18.22	40.53	58.75	74.00	-15.25	peak




Test Mode:	802.11a 20 Average	Channel:	5240 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

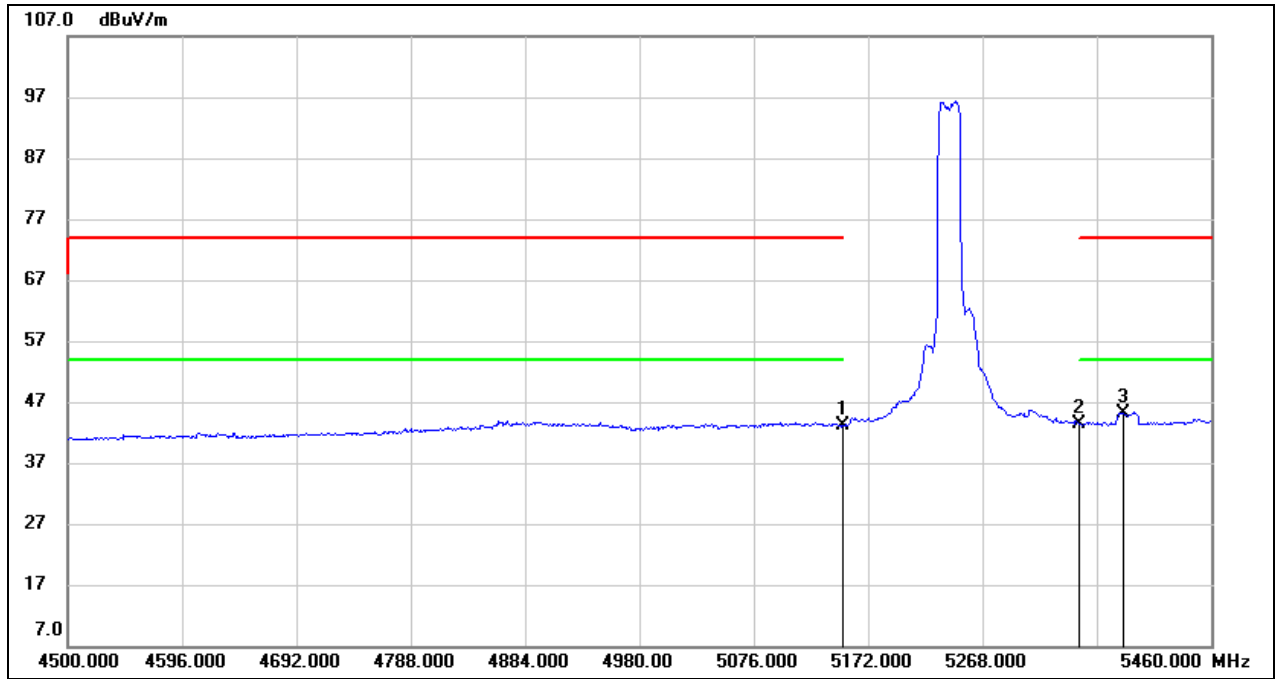

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	2.76	40.27	43.03	54.00	-10.97	AVG
2	5350.000	2.84	40.49	43.33	54.00	-10.67	AVG
3	5386.080	4.53	40.53	45.06	54.00	-8.94	AVG




Test Mode:	802.11a 20 Peak	Channel:	5745 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

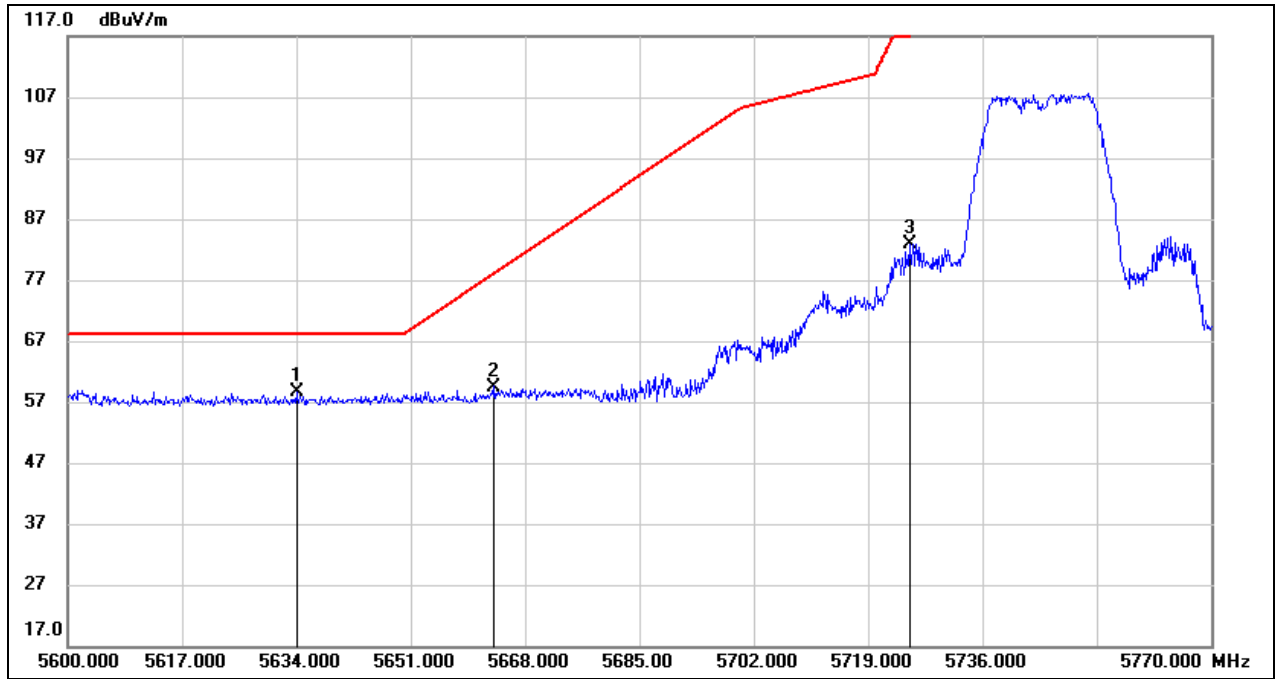

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5634.000	17.68	41.02	58.70	68.20	-9.50	peak
2	5663.410	18.41	41.09	59.50	78.16	-18.66	peak
3	5725.000	41.61	41.27	82.88	122.20	-39.32	peak




Test Mode:	802.11a 20 Peak	Channel:	5825 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

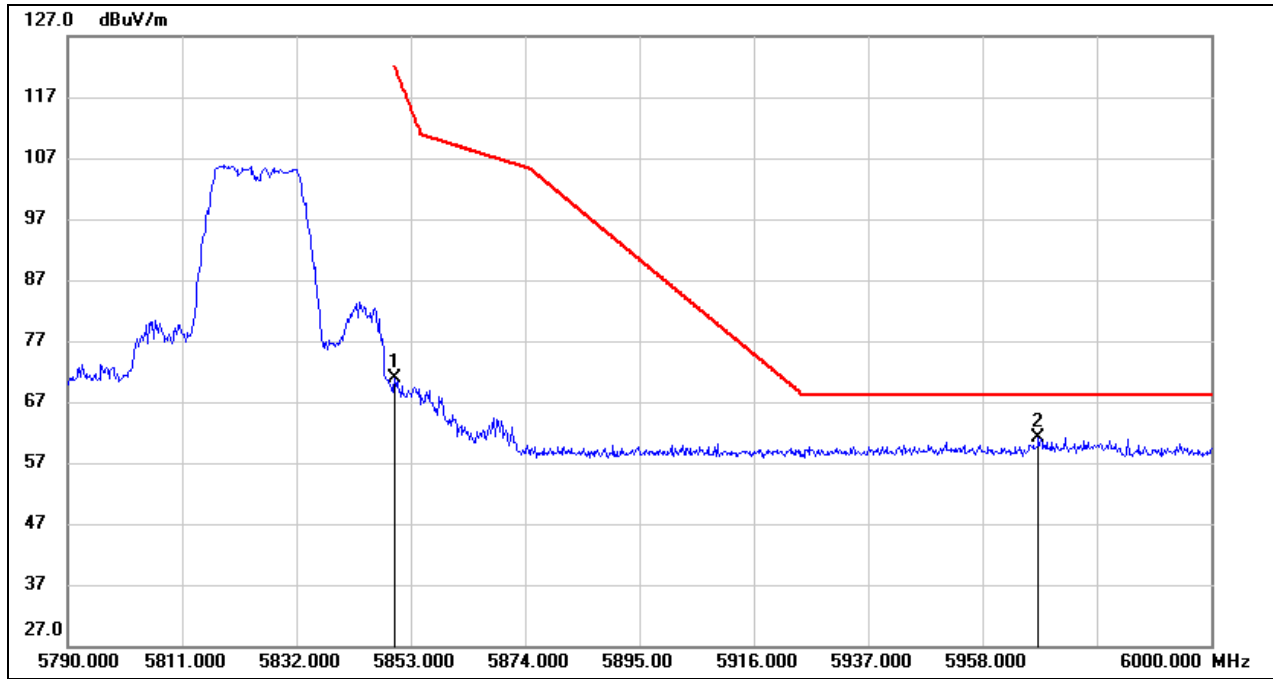

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	29.31	41.60	70.91	122.20	-51.29	peak
2	5968.290	19.15	41.92	61.07	68.20	-7.13	peak




Test Mode:	802.11n HT20 Peak	Channel:	5180 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

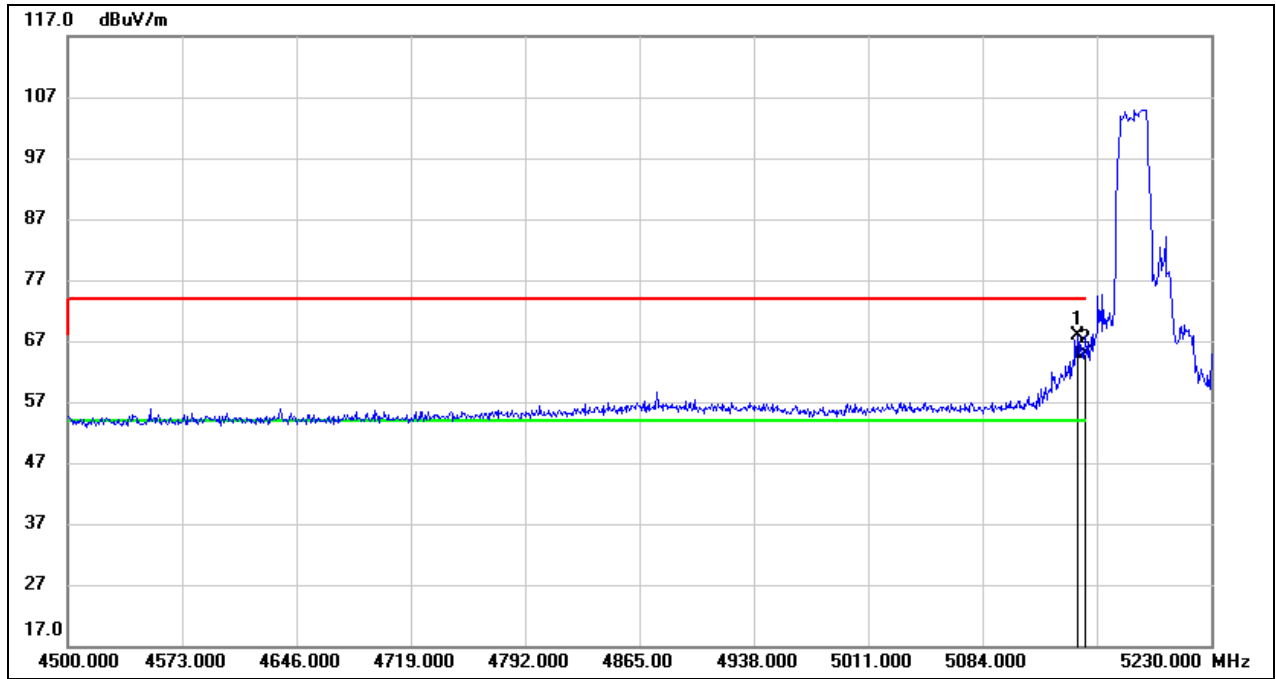

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.590	27.70	40.27	67.97	74.00	-6.03	peak
2	5150.000	24.65	40.27	64.92	74.00	-9.08	peak




Test Mode:	802.11n HT20 Average	Channel:	5180 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

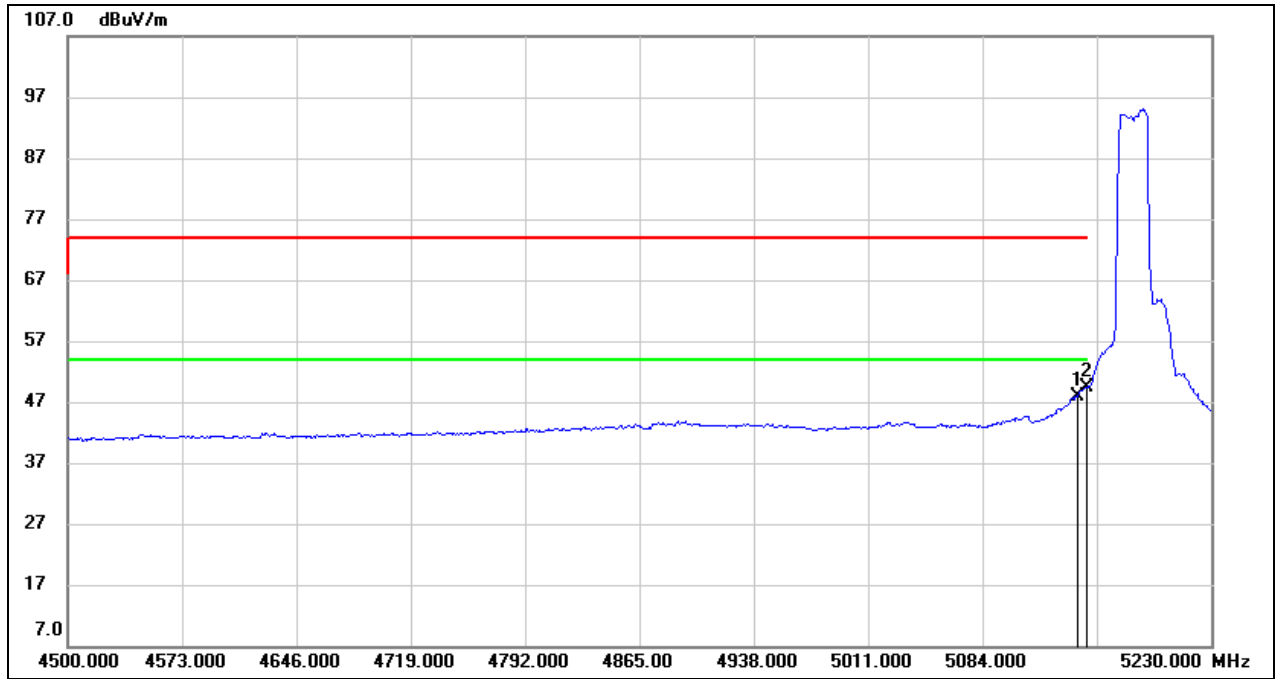

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.590	7.71	40.27	47.98	54.00	-6.02	AVG
2	5150.000	9.08	40.27	49.35	54.00	-4.65	AVG




Test Mode:	802.11n HT20 Peak	Channel:	5240 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

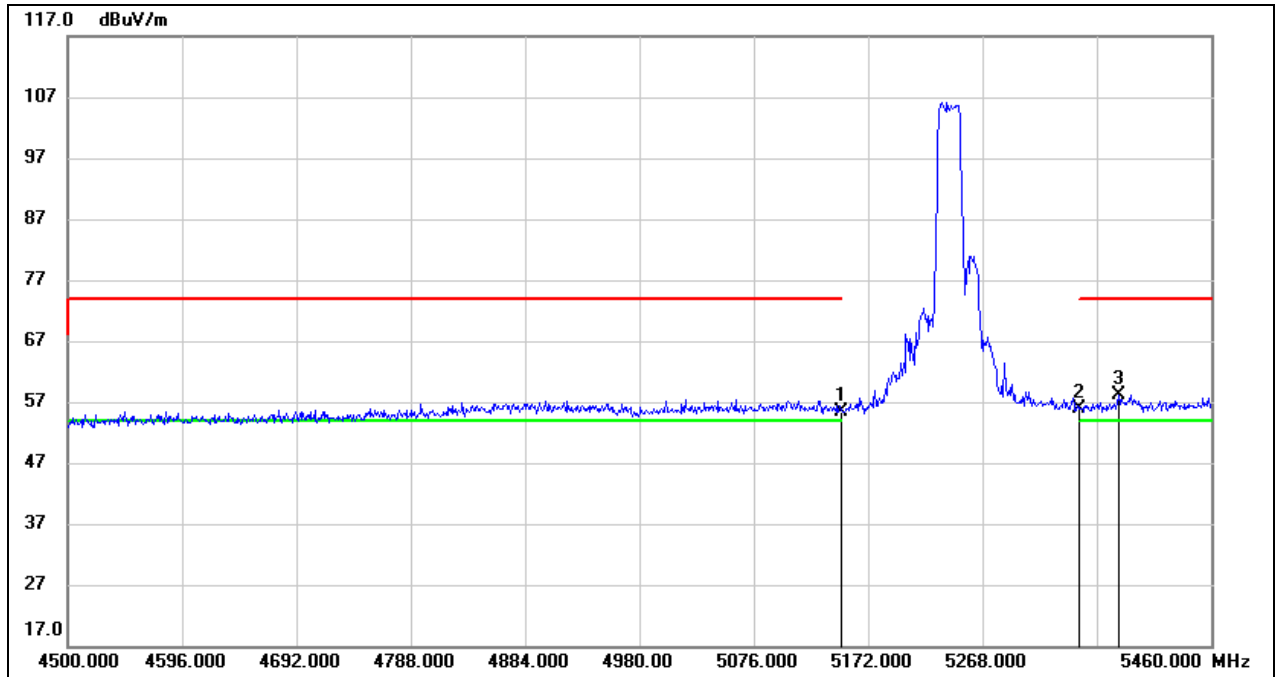

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	15.03	40.27	55.30	74.00	-18.70	peak
2	5350.000	15.37	40.49	55.86	74.00	-18.14	peak
3	5382.240	17.53	40.53	58.06	74.00	-15.94	peak




Test Mode:	802.11n HT20 Average	Channel:	5240 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

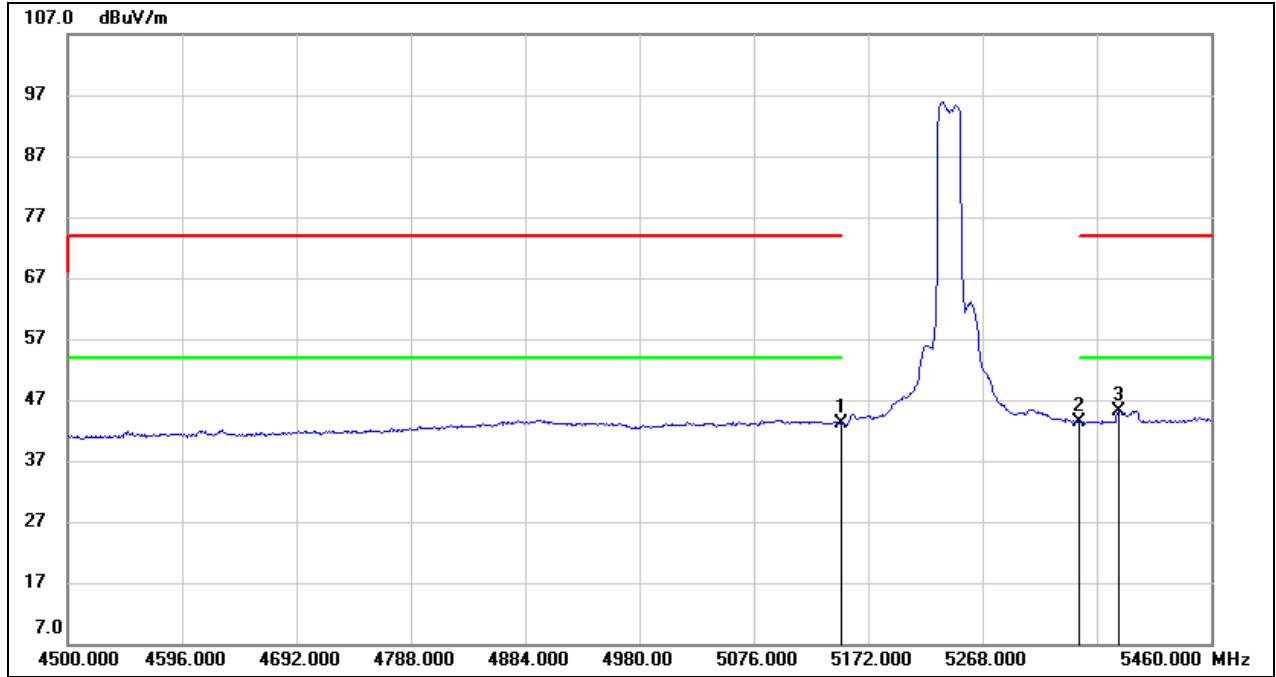

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	2.91	40.27	43.18	54.00	-10.82	AVG
2	5350.000	2.89	40.49	43.38	54.00	-10.62	AVG
3	5382.240	4.63	40.53	45.16	54.00	-8.84	AVG




Test Mode:	802.11n HT20 Peak	Channel:	5745 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

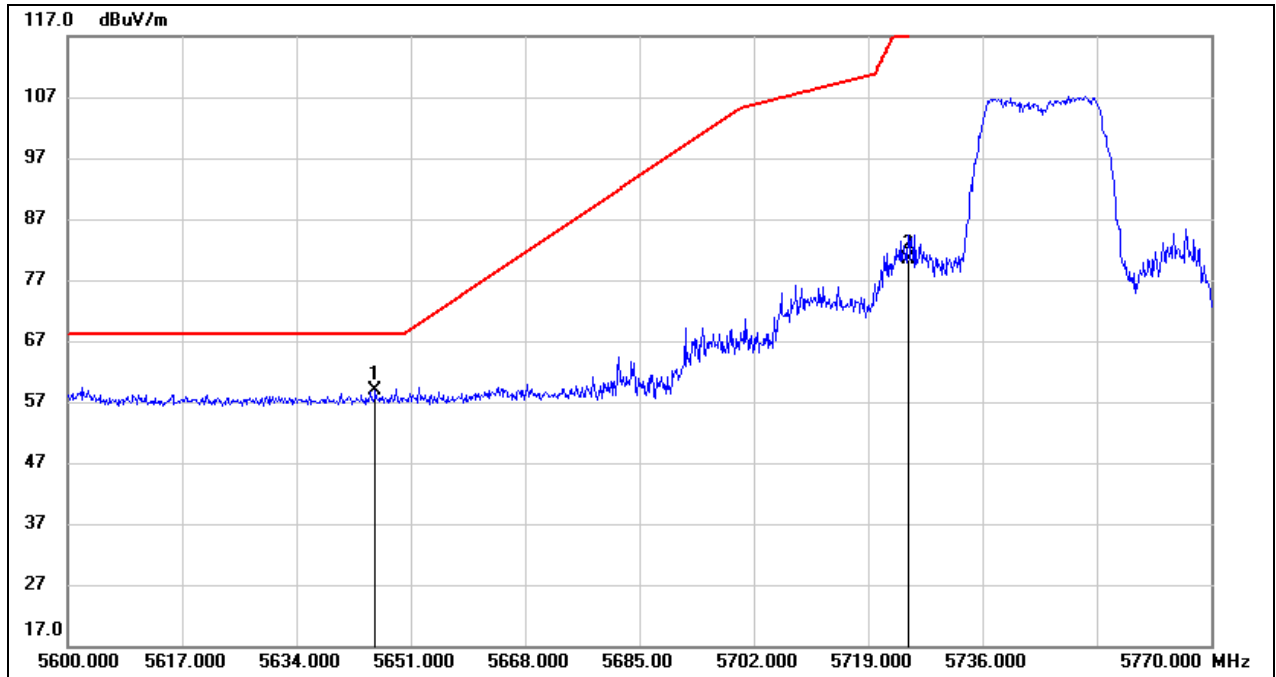

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5645.730	17.75	41.05	58.80	68.20	-9.40	peak
2	5725.000	39.03	41.27	80.30	122.20	-41.90	peak




Test Mode:	802.11n HT20 Peak	Channel:	5825 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

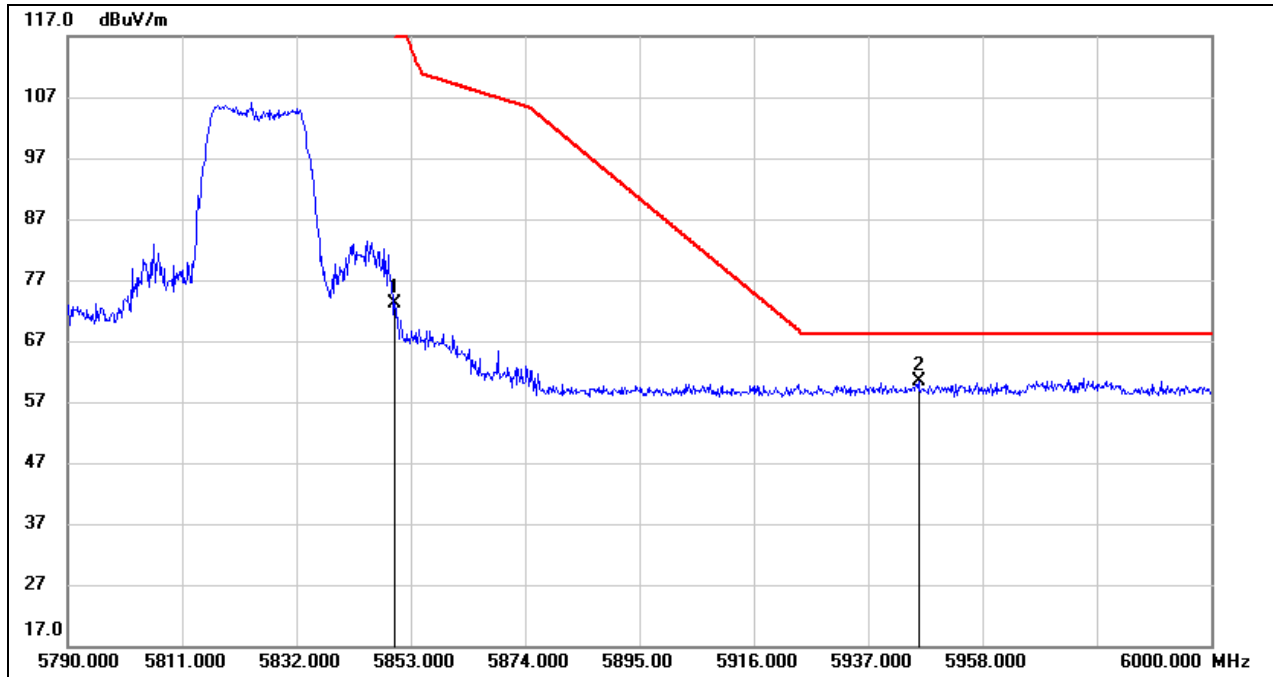

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	31.44	41.60	73.04	122.20	-49.16	peak
2	5946.240	18.45	41.86	60.31	68.20	-7.89	peak




Test Mode:	802.11n HT40 Peak	Channel:	5190 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

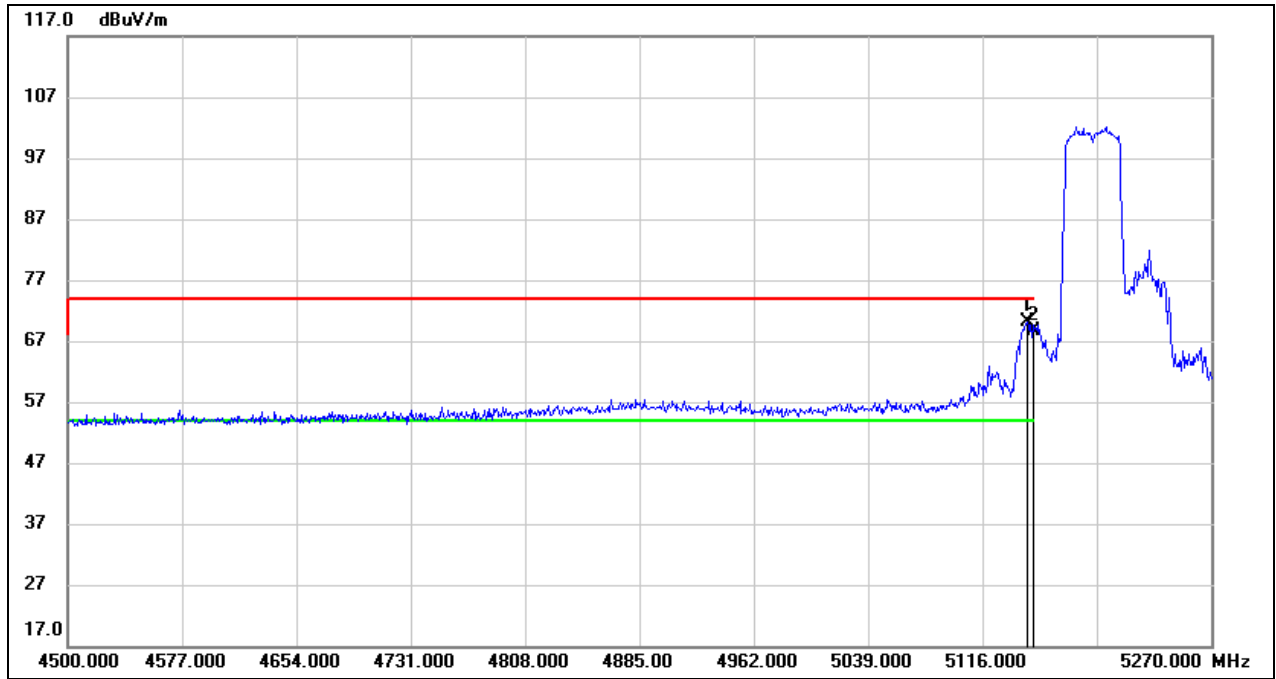

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.030	29.81	40.27	70.08	74.00	-3.92	peak
2	5150.000	28.29	40.27	68.56	74.00	-5.44	peak




Test Mode:	802.11n HT40 Average	Channel:	5190 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

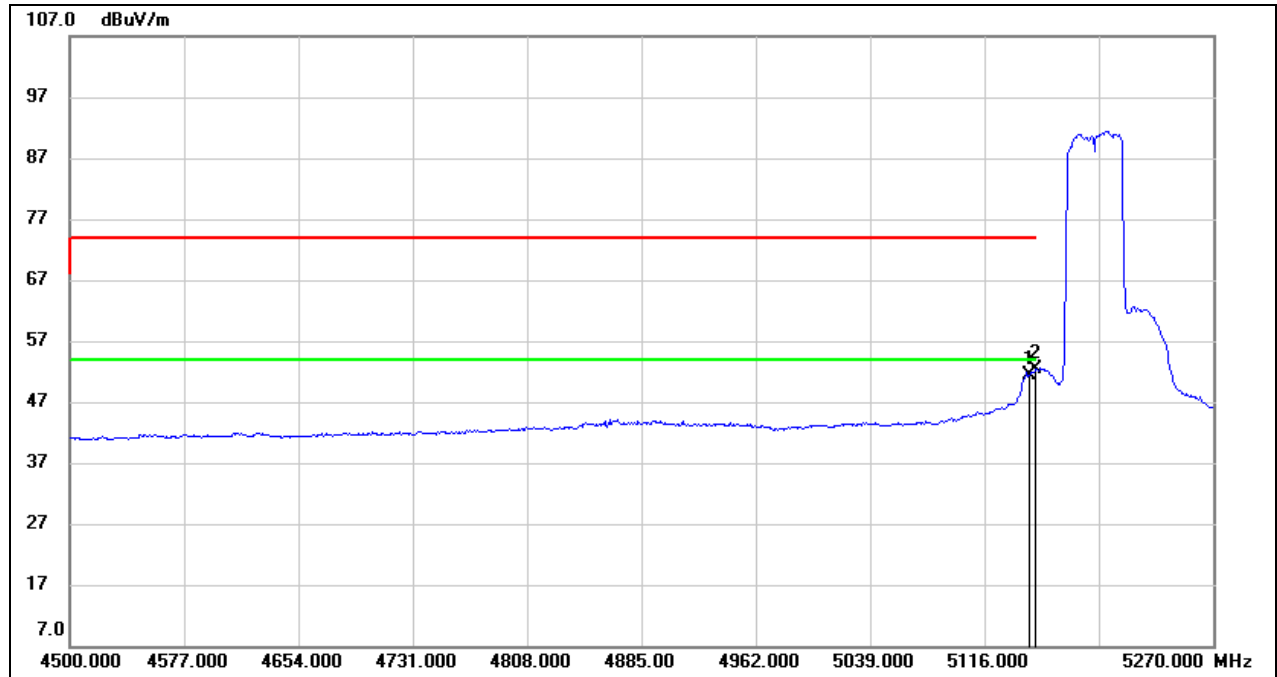

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.030	11.15	40.27	51.42	54.00	-2.58	AVG
2	5150.000	12.12	40.27	52.39	54.00	-1.61	AVG




Test Mode:	802.11n HT40 Peak	Channel:	5230 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

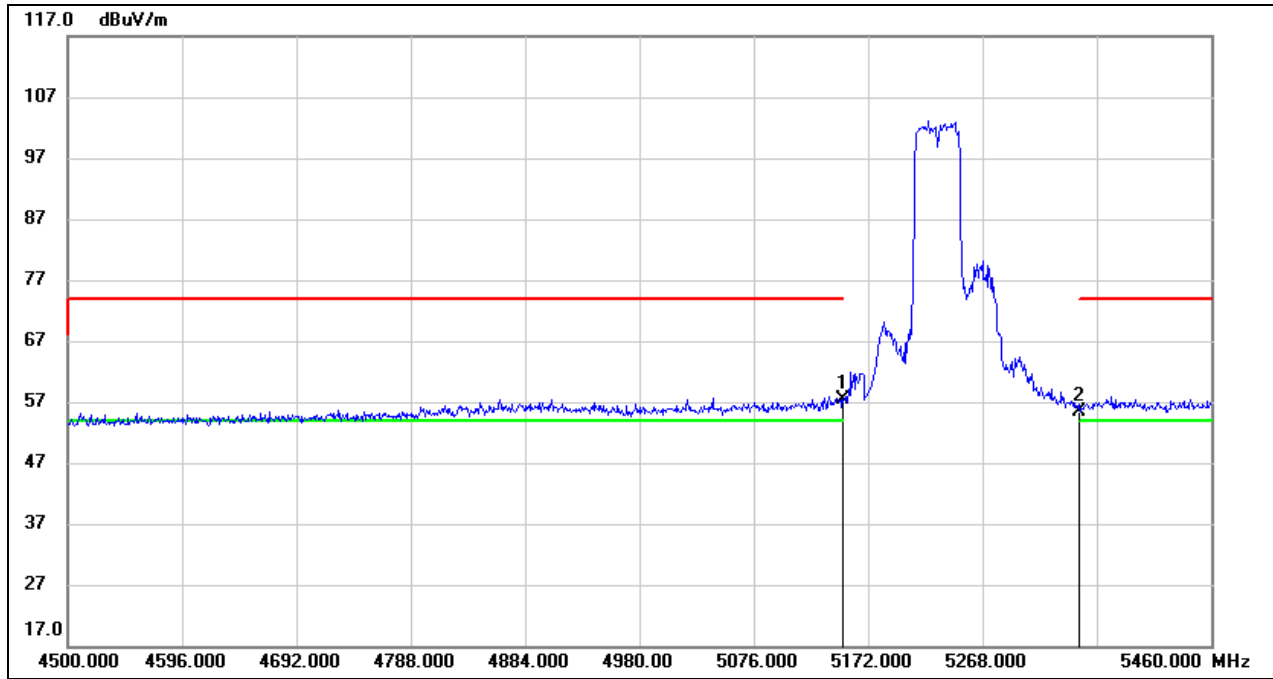

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	17.04	40.27	57.31	74.00	-16.69	peak
2	5350.000	14.79	40.49	55.28	74.00	-18.72	peak




Test Mode:	802.11n HT40 Average	Channel:	5230 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

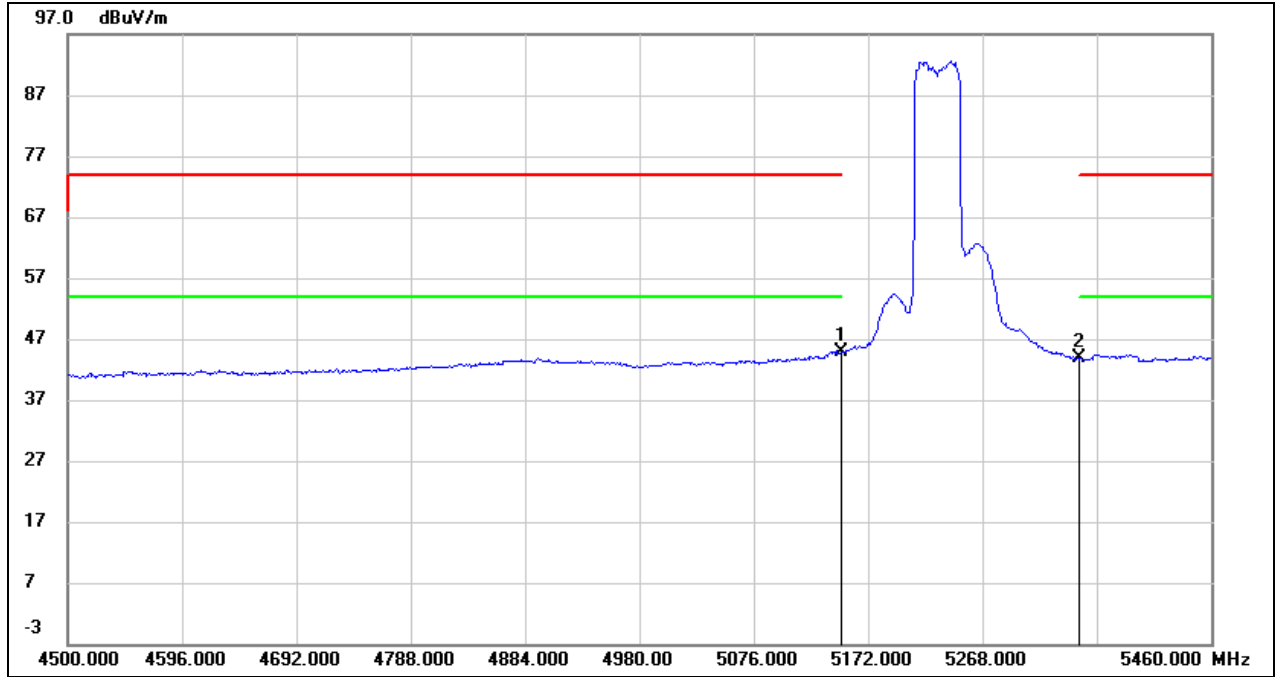

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	4.50	40.27	44.77	54.00	-9.23	AVG
2	5350.000	3.34	40.49	43.83	54.00	-10.17	AVG




Test Mode:	802.11n HT40 Peak	Channel:	5755 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

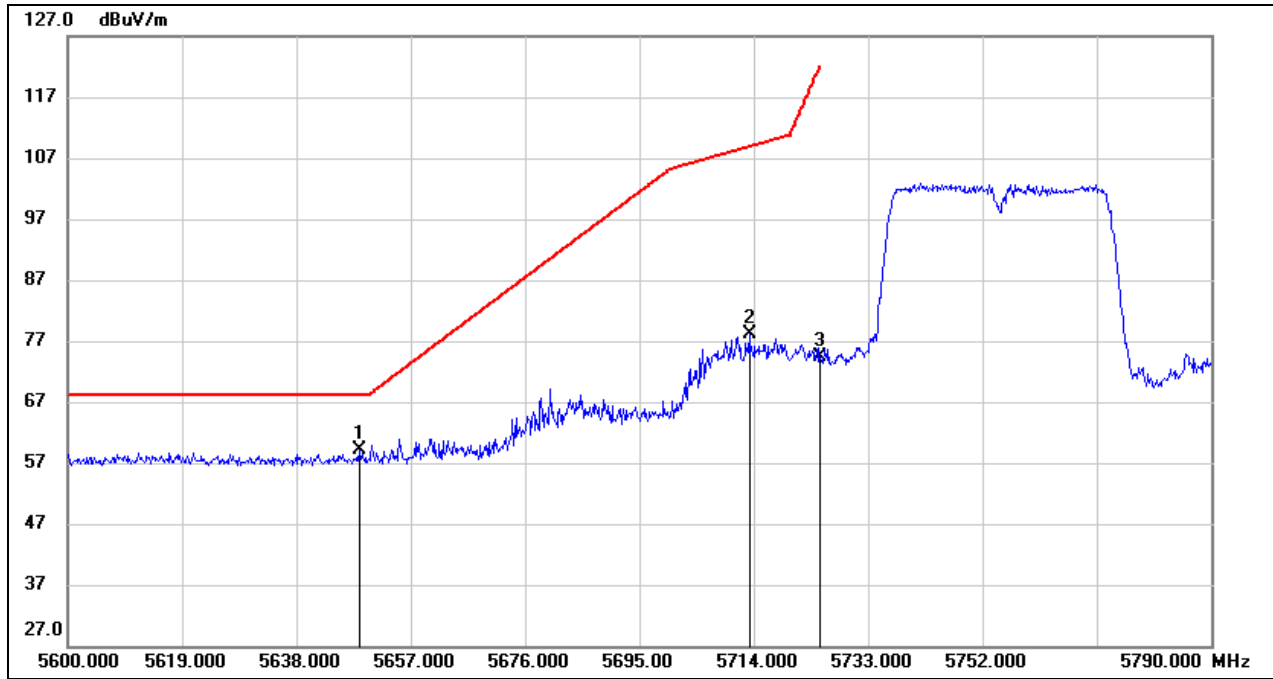

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5648.450	17.97	41.06	59.03	68.20	-9.17	peak
2	5713.240	36.84	41.23	78.07	108.91	-30.84	peak
3	5725.000	33.11	41.27	74.38	122.20	-47.82	peak




Test Mode:	802.11n HT40 Peak	Channel:	5795 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

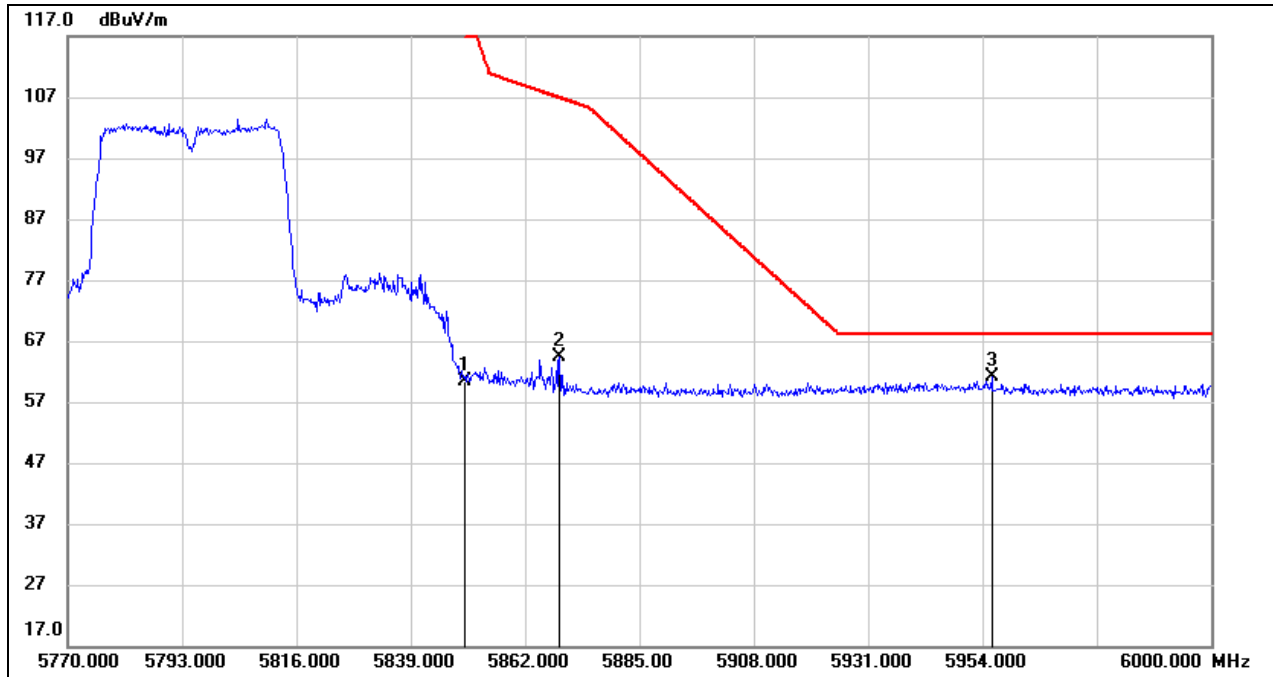

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	18.73	41.60	60.33	122.20	-61.87	peak
2	5868.900	22.65	41.65	64.30	106.91	-42.61	peak
3	5955.840	19.34	41.89	61.23	68.20	-6.97	peak




Test Mode:	802.11ac VHT80 Peak	Channel:	5210 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

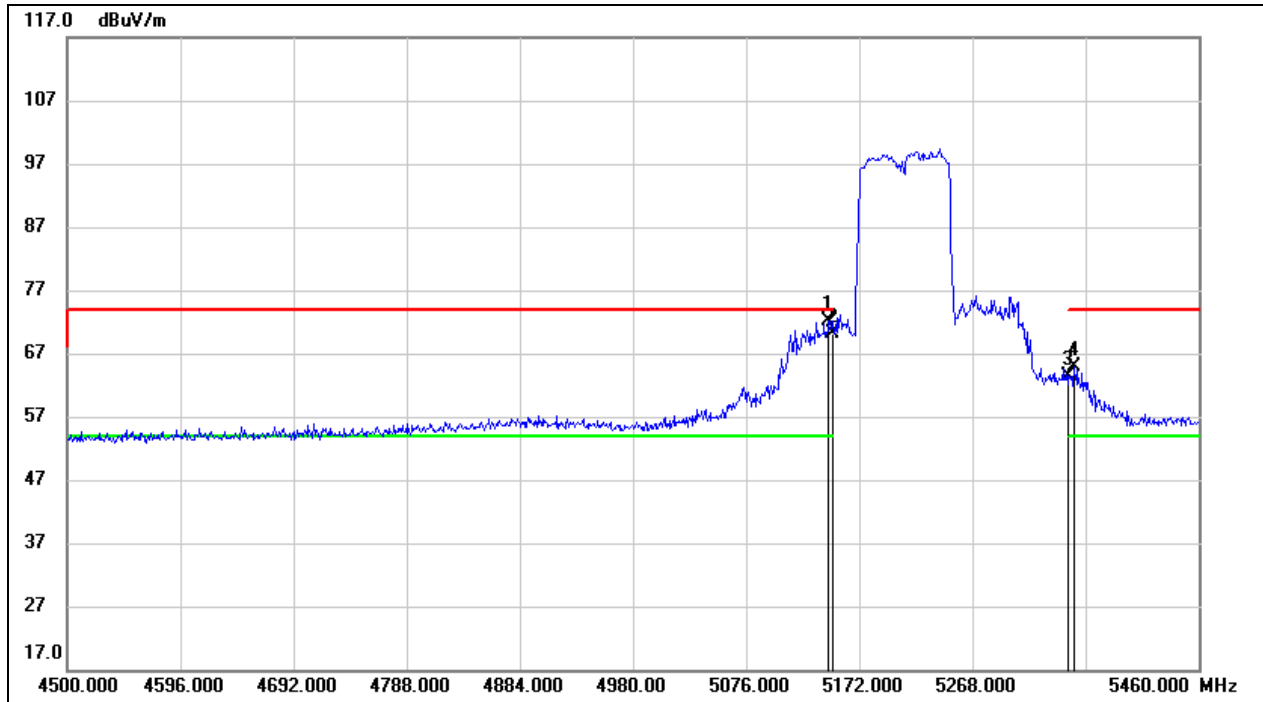

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.080	31.93	40.27	72.20	74.00	-1.80	peak
2	5150.000	29.75	40.27	70.02	74.00	-3.98	peak
3	5350.000	22.82	40.49	63.31	74.00	-10.69	peak
4	5354.400	24.46	40.50	64.96	74.00	-9.04	peak




Test Mode:	802.11ac VHT80 Average	Channel:	5210 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

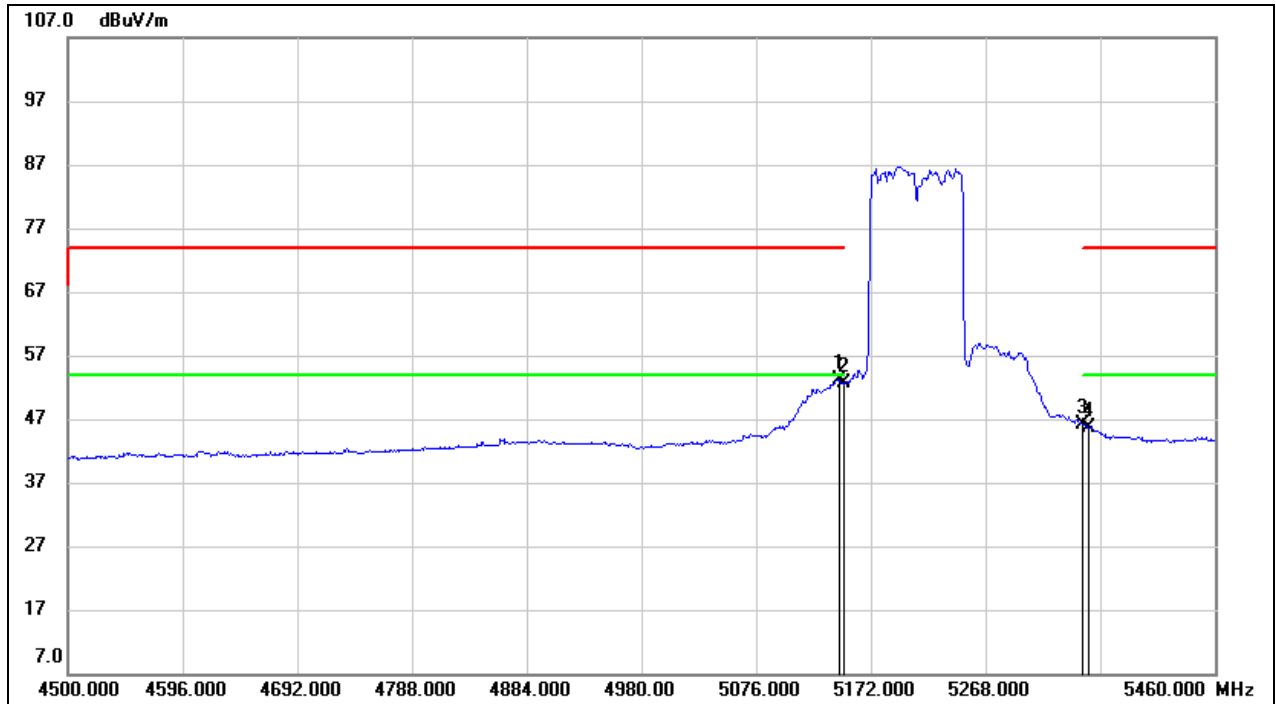

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.080	12.80	40.27	53.07	54.00	-0.93	AVG
2	5150.000	12.29	40.27	52.56	54.00	-1.44	AVG
3	5350.000	5.52	40.49	46.01	54.00	-7.99	AVG
4	5354.400	5.20	40.50	45.70	54.00	-8.30	AVG



Test Mode:	802.11ac VHT80 Peak	Channel:	5775 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

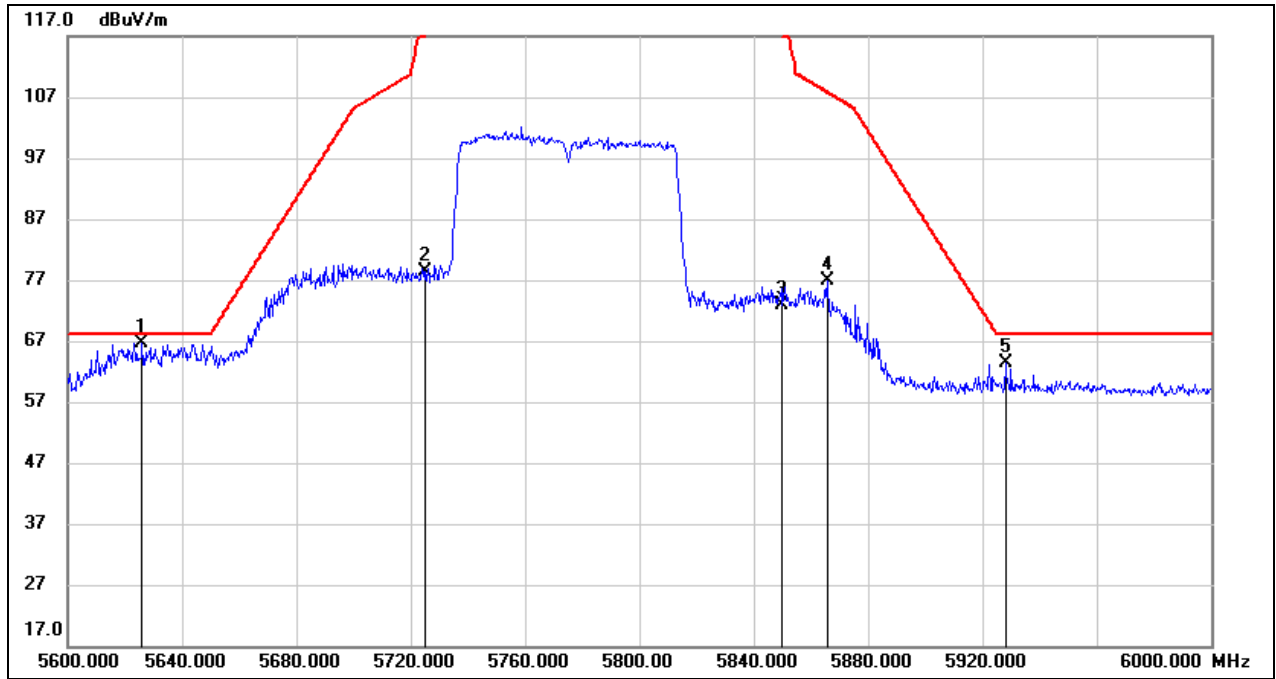


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5626.000	25.60	41.00	66.60	68.20	-1.60	peak
2	5725.000	37.17	41.27	78.44	122.20	-43.76	peak
3	5850.000	31.24	41.60	72.84	122.20	-49.36	peak
4	5865.600	35.29	41.64	76.93	107.83	-30.90	peak
5	5928.000	21.60	41.81	63.41	68.20	-4.79	peak



8.2. SPURIOUS EMISSIONS (1 GHZ ~ 7 GHZ)


Test Mode:	802.11a 20	Channel:	5180 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

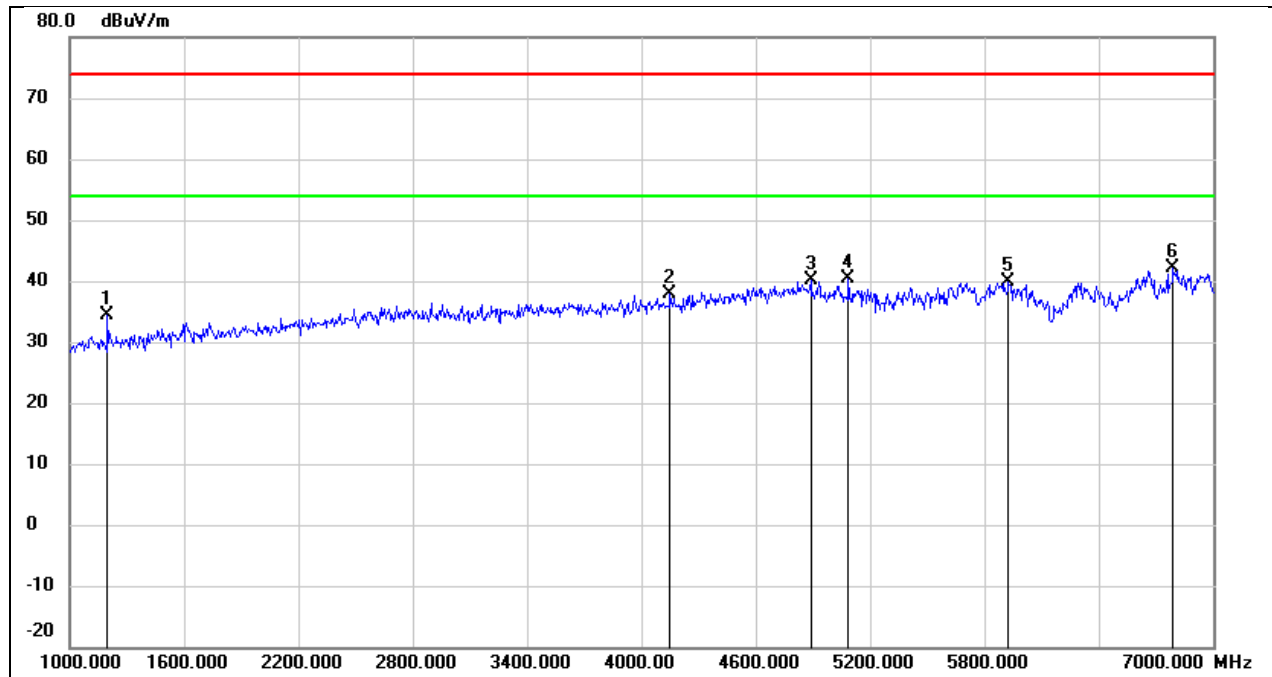

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1198.000	48.39	-14.11	34.28	74.00	-39.72	peak
2	4150.000	41.53	-3.77	37.76	74.00	-36.24	peak
3	4888.000	40.61	-0.60	40.01	74.00	-33.99	peak
4	5086.000	40.37	-0.05	40.32	74.00	-33.68	peak
5	5926.000	38.26	1.64	39.90	74.00	-34.10	peak
6	6790.000	36.97	5.15	42.12	74.00	-31.88	peak




Test Mode:	802.11a 20	Channel:	5180 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

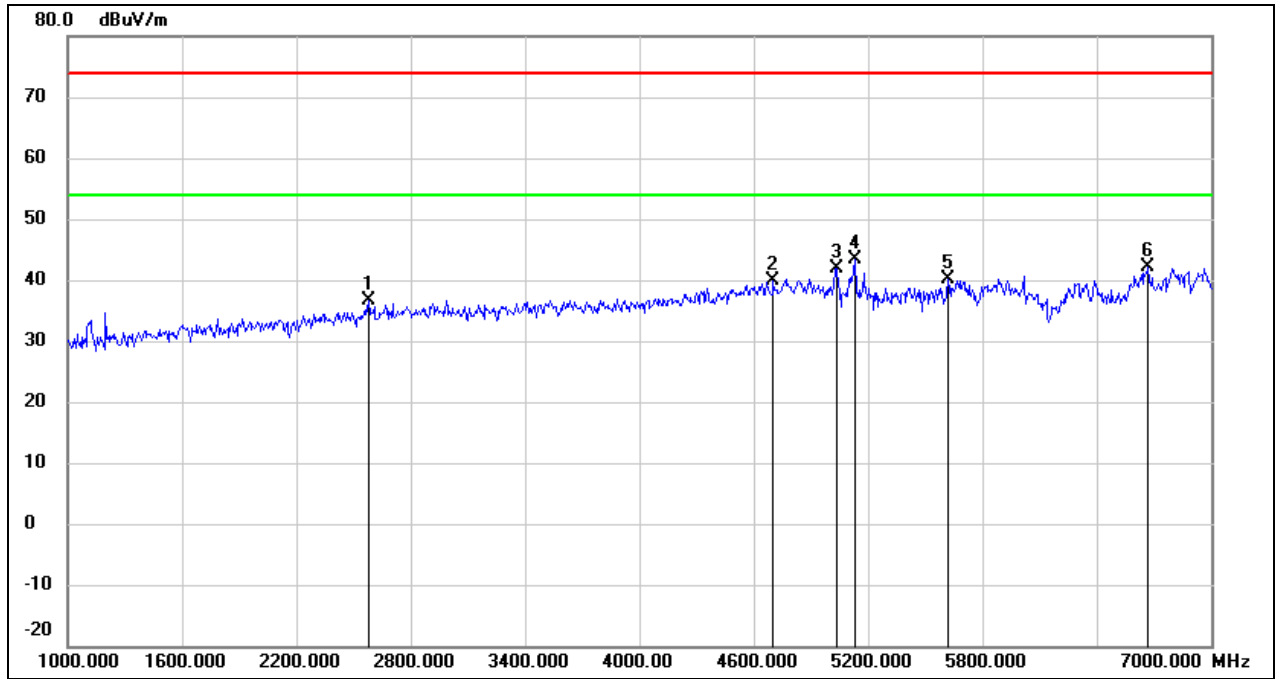

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2578.000	44.87	-8.26	36.61	74.00	-37.39	peak
2	4702.000	41.10	-1.34	39.76	74.00	-34.24	peak
3	5032.000	41.96	-0.12	41.84	74.00	-32.16	peak
4	5134.000	43.50	0.00	43.50	74.00	-30.50	peak
5	5620.000	39.30	0.76	40.06	74.00	-33.94	peak
6	6670.000	37.55	4.57	42.12	74.00	-31.88	peak




Test Mode:	802.11a 20	Channel:	5200 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

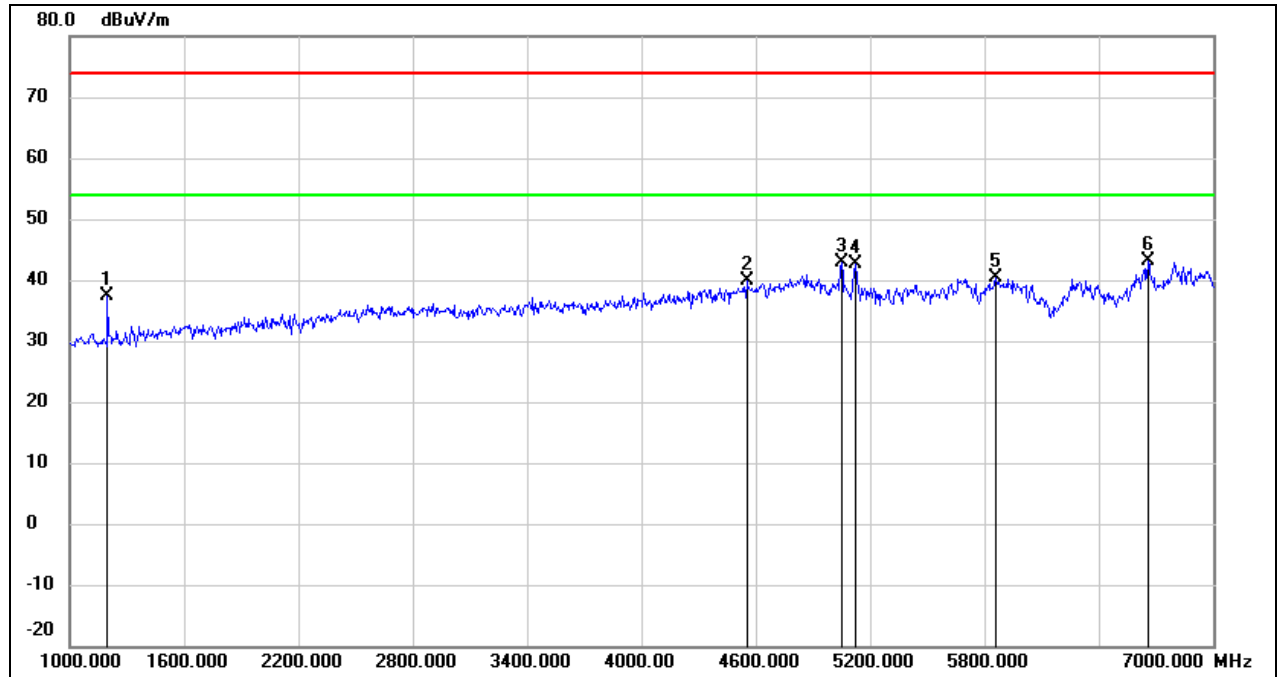

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1198.000	51.58	-14.11	37.47	74.00	-36.53	peak
2	4552.000	41.91	-1.93	39.98	74.00	-34.02	peak
3	5050.000	42.90	-0.09	42.81	74.00	-31.19	peak
4	5122.000	42.54	-0.02	42.52	74.00	-31.48	peak
5	5860.000	38.85	1.45	40.30	74.00	-33.70	peak
6	6658.000	38.69	4.49	43.18	74.00	-30.82	peak




Test Mode:	802.11a 20	Channel:	5200 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

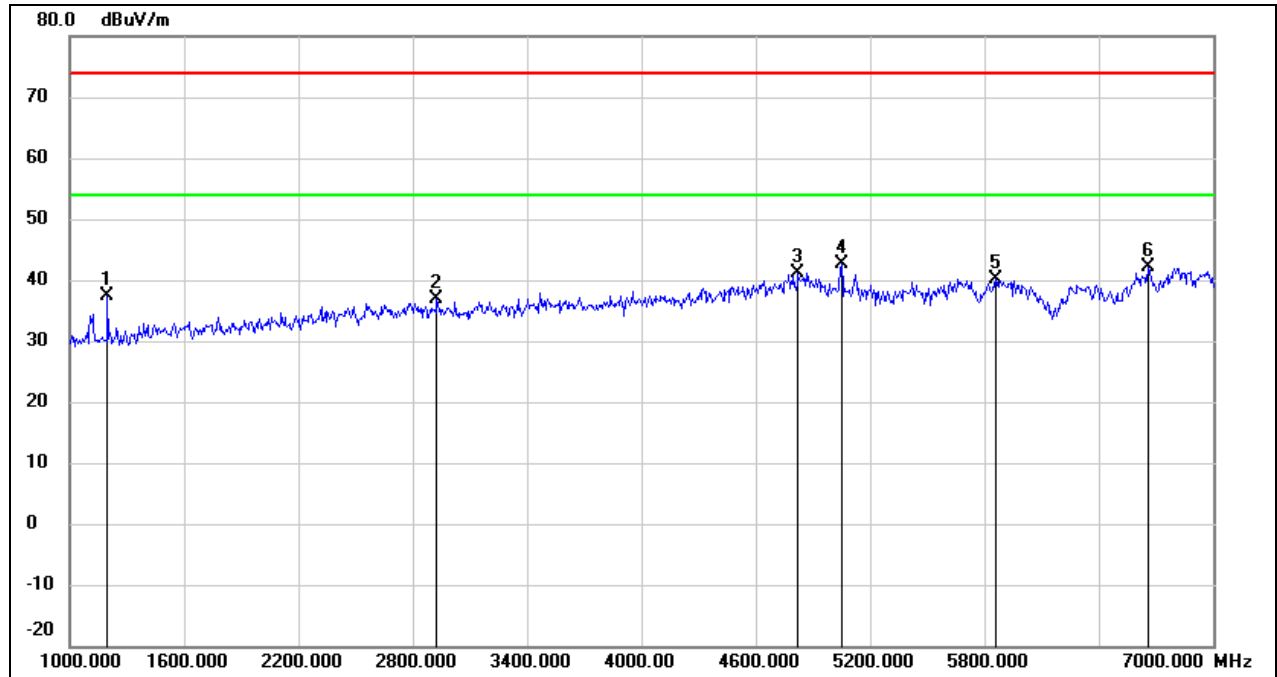

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1198.000	51.47	-14.11	37.36	74.00	-36.64	peak
2	2926.000	44.13	-7.20	36.93	74.00	-37.07	peak
3	4822.000	42.07	-0.85	41.22	74.00	-32.78	peak
4	5050.000	42.81	-0.09	42.72	74.00	-31.28	peak
5	5860.000	38.69	1.45	40.14	74.00	-33.86	peak
6	6658.000	37.56	4.49	42.05	74.00	-31.95	peak




Test Mode:	802.11a 20	Channel:	5240 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

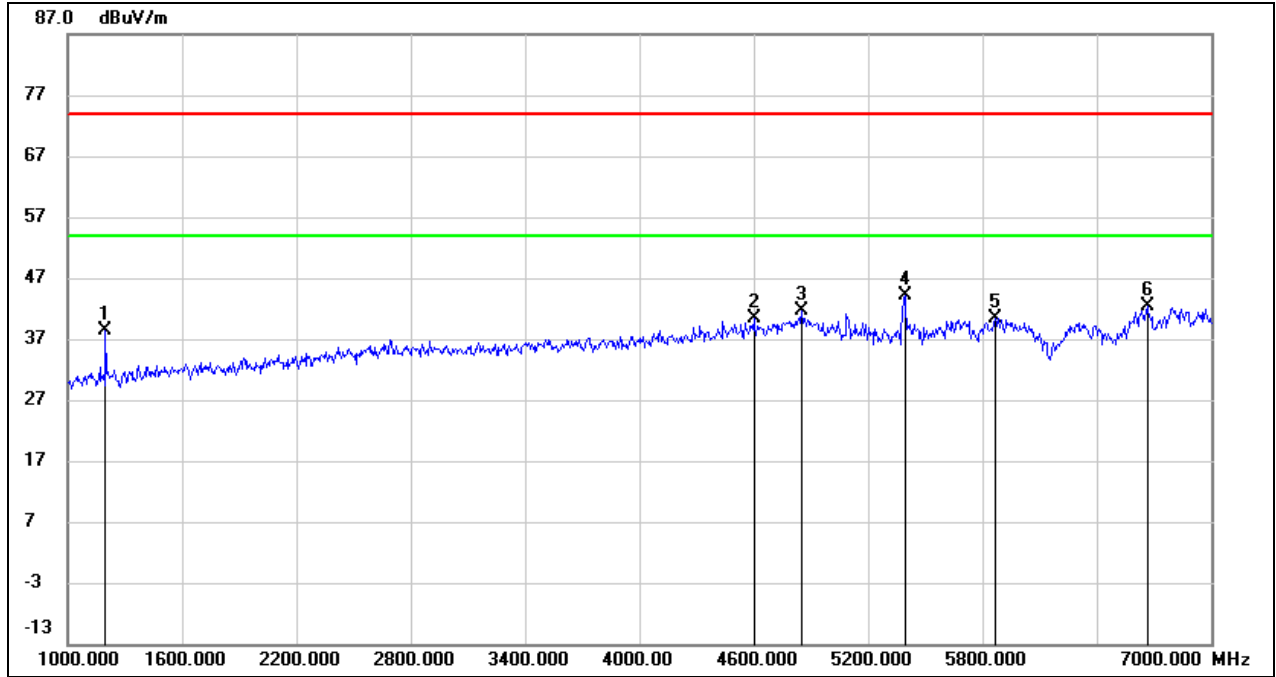

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1198.000	52.39	-14.11	38.28	74.00	-35.72	peak
2	4600.000	42.08	-1.74	40.34	74.00	-33.66	peak
3	4852.000	42.30	-0.74	41.56	74.00	-32.44	peak
4	5392.000	43.88	0.29	44.17	74.00	-29.83	peak
5	5866.000	39.00	1.47	40.47	74.00	-33.53	peak
6	6664.000	37.94	4.54	42.48	74.00	-31.52	peak




Test Mode:	802.11a 20	Channel:	5240 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

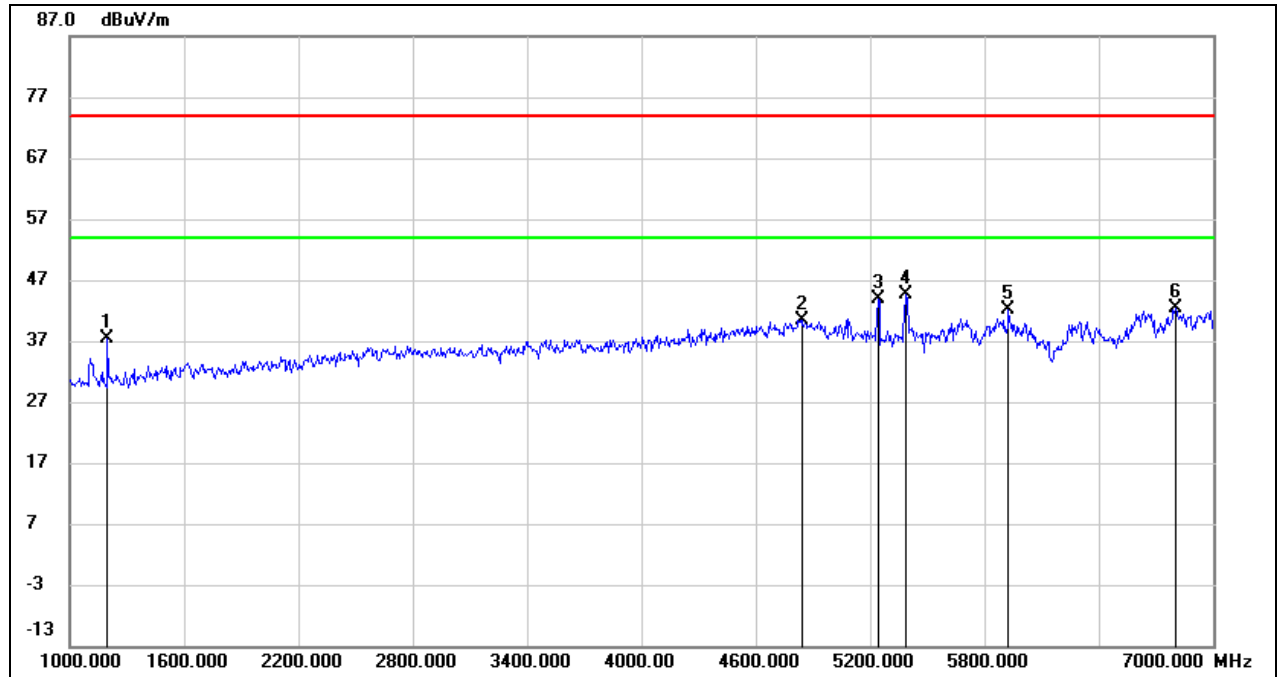

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1198.000	51.49	-14.11	37.38	74.00	-36.62	peak
2	4846.000	41.13	-0.77	40.36	74.00	-33.64	peak
3	5242.000	43.80	0.12	43.92	74.00	-30.08	peak
4	5386.000	44.27	0.29	44.56	74.00	-29.44	peak
5	5926.000	40.48	1.64	42.12	74.00	-31.88	peak
6	6802.000	37.20	5.21	42.41	74.00	-31.59	peak




Test Mode:	802.11a 20	Channel:	5745 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

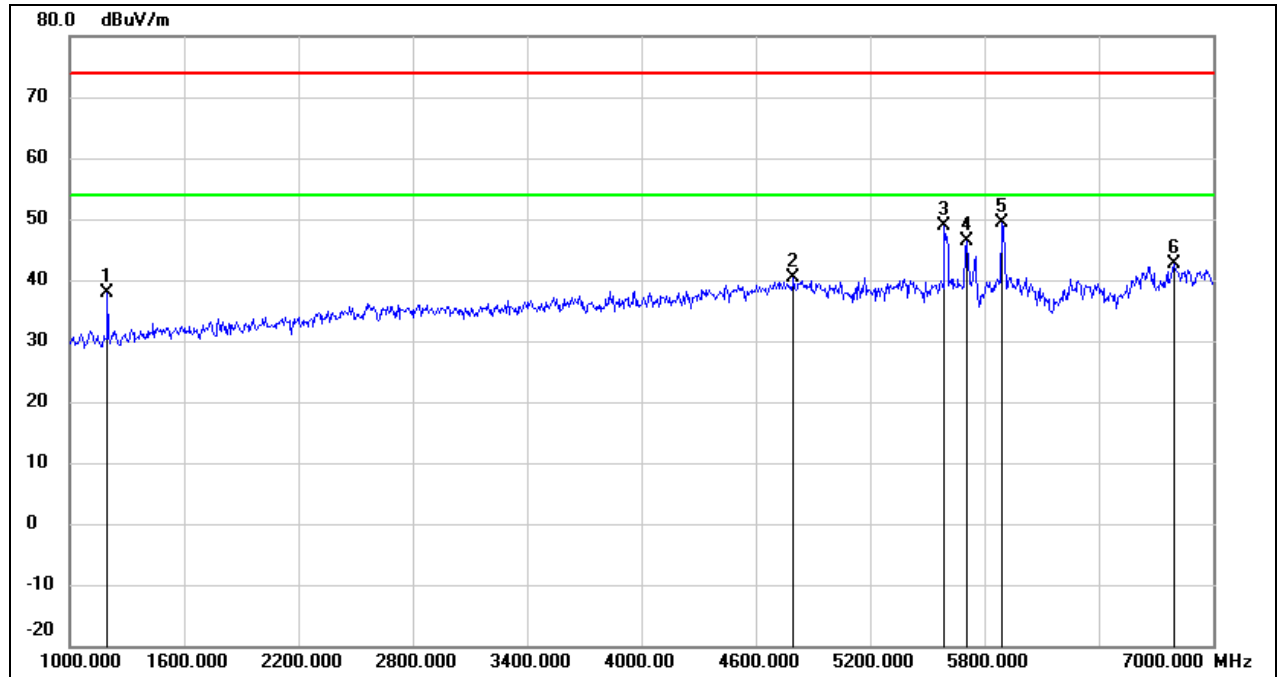

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1198.000	52.04	-14.11	37.93	74.00	-36.07	peak
2	4798.000	41.24	-0.95	40.29	74.00	-33.71	peak
3	5590.000	48.08	0.68	48.76	74.00	-25.24	peak
4	5704.000	45.43	1.00	46.43	74.00	-27.57	peak
5	5890.000	47.88	1.54	49.42	74.00	-24.58	peak
6	6796.000	37.39	5.19	42.58	74.00	-31.42	peak




Test Mode:	802.11a 20	Channel:	5745 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

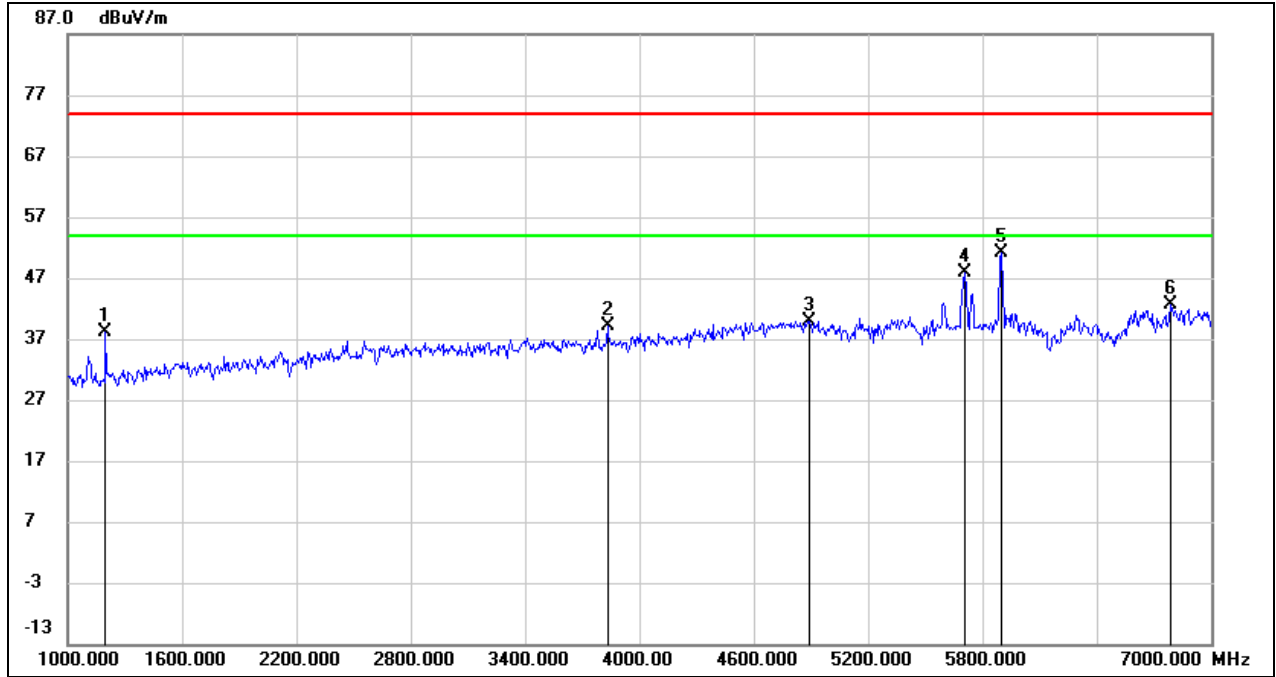

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1198.000	52.34	-14.11	38.23	74.00	-35.77	peak
2	3832.000	44.06	-4.94	39.12	74.00	-34.88	peak
3	4888.000	40.56	-0.60	39.96	74.00	-34.04	peak
4	5710.000	46.79	1.02	47.81	74.00	-26.19	peak
5	5896.000	49.45	1.56	51.01	74.00	-22.99	peak
6	6790.000	37.59	5.15	42.74	74.00	-31.26	peak




Test Mode:	802.11a 20	Channel:	5785 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

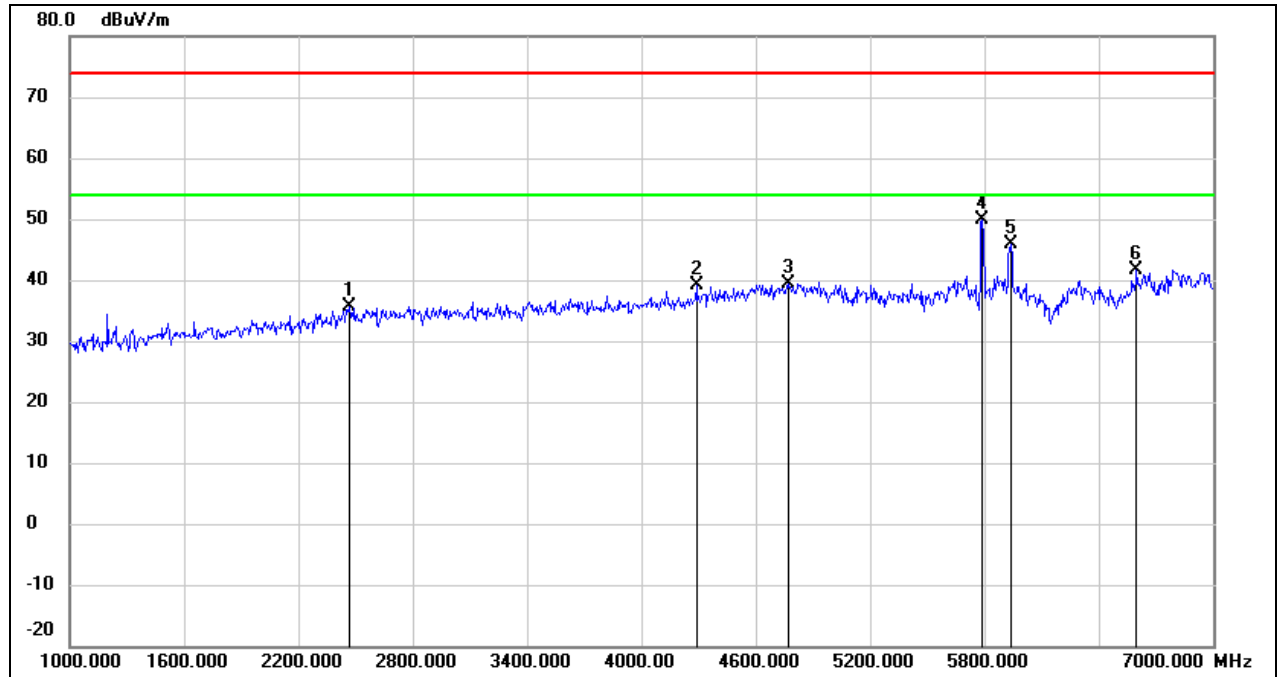

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.000	44.39	-8.68	35.71	74.00	-38.29	peak
2	4288.000	42.18	-3.13	39.05	74.00	-34.95	peak
3	4768.000	40.41	-1.07	39.34	74.00	-34.66	peak
4	5788.000	48.72	1.25	49.97	74.00	-24.03	peak
5	5938.000	44.13	1.67	45.80	74.00	-28.20	peak
6	6598.000	37.44	4.21	41.65	74.00	-32.35	peak




Test Mode:	802.11a 20	Channel:	5785 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

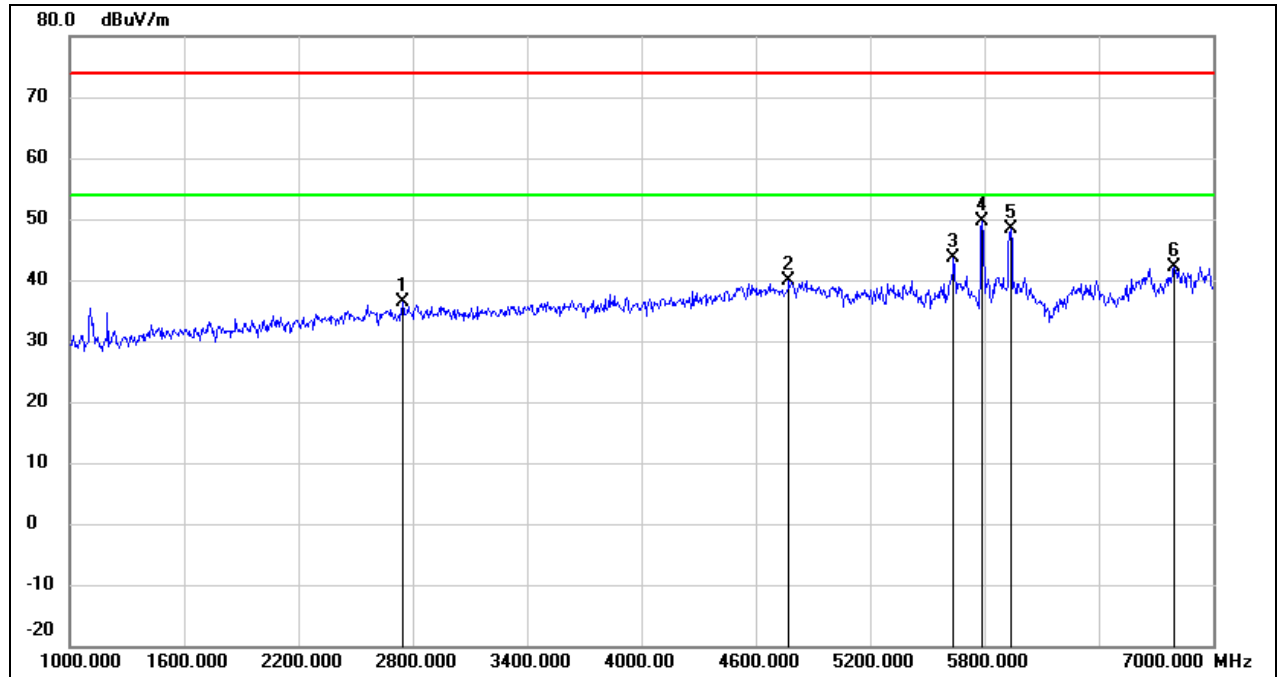

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2746.000	44.11	-7.75	36.36	74.00	-37.64	peak
2	4774.000	40.98	-1.05	39.93	74.00	-34.07	peak
3	5638.000	42.81	0.81	43.62	74.00	-30.38	peak
4	5788.000	48.35	1.25	49.60	74.00	-24.40	peak
5	5938.000	46.63	1.67	48.30	74.00	-25.70	peak
6	6796.000	36.91	5.19	42.10	74.00	-31.90	peak




Test Mode:	802.11a 20	Channel:	5825 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

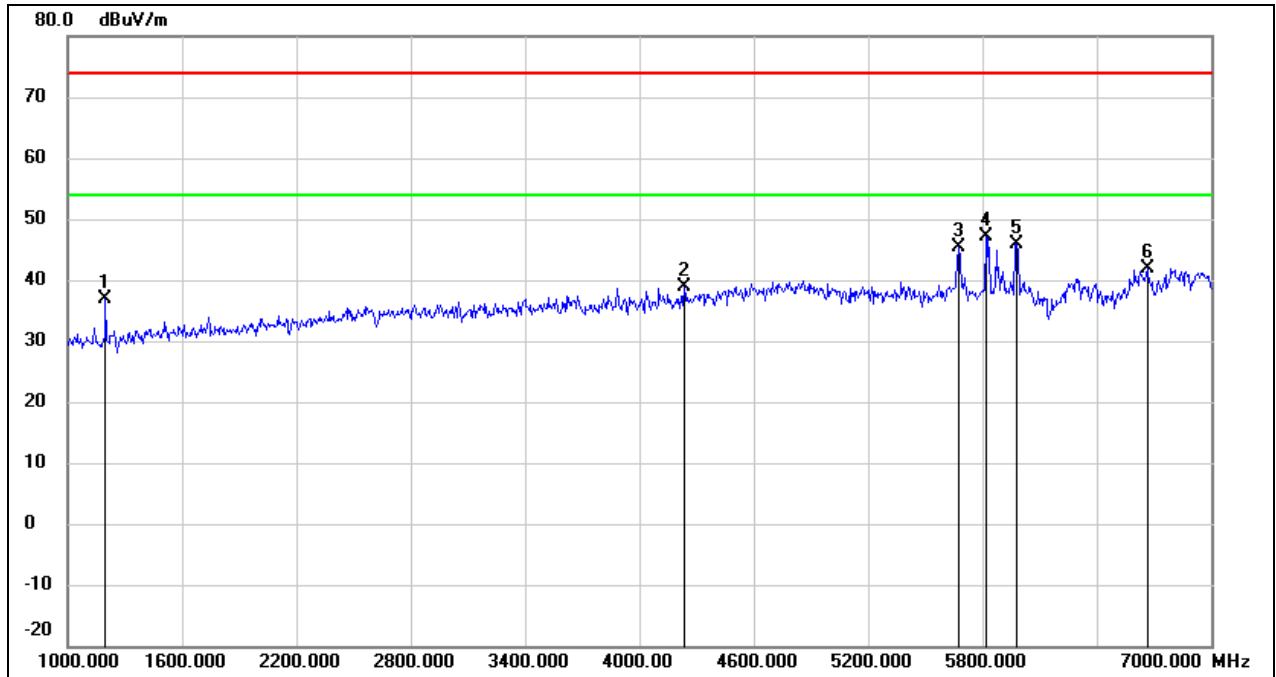

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1198.000	51.05	-14.11	36.94	74.00	-37.06	peak
2	4234.000	42.32	-3.39	38.93	74.00	-35.07	peak
3	5674.000	44.48	0.92	45.40	74.00	-28.60	peak
4	5818.000	45.88	1.33	47.21	74.00	-26.79	peak
5	5980.000	44.19	1.79	45.98	74.00	-28.02	peak
6	6664.000	37.37	4.54	41.91	74.00	-32.09	peak



Test Mode:	802.11a 20	Channel:	5825 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

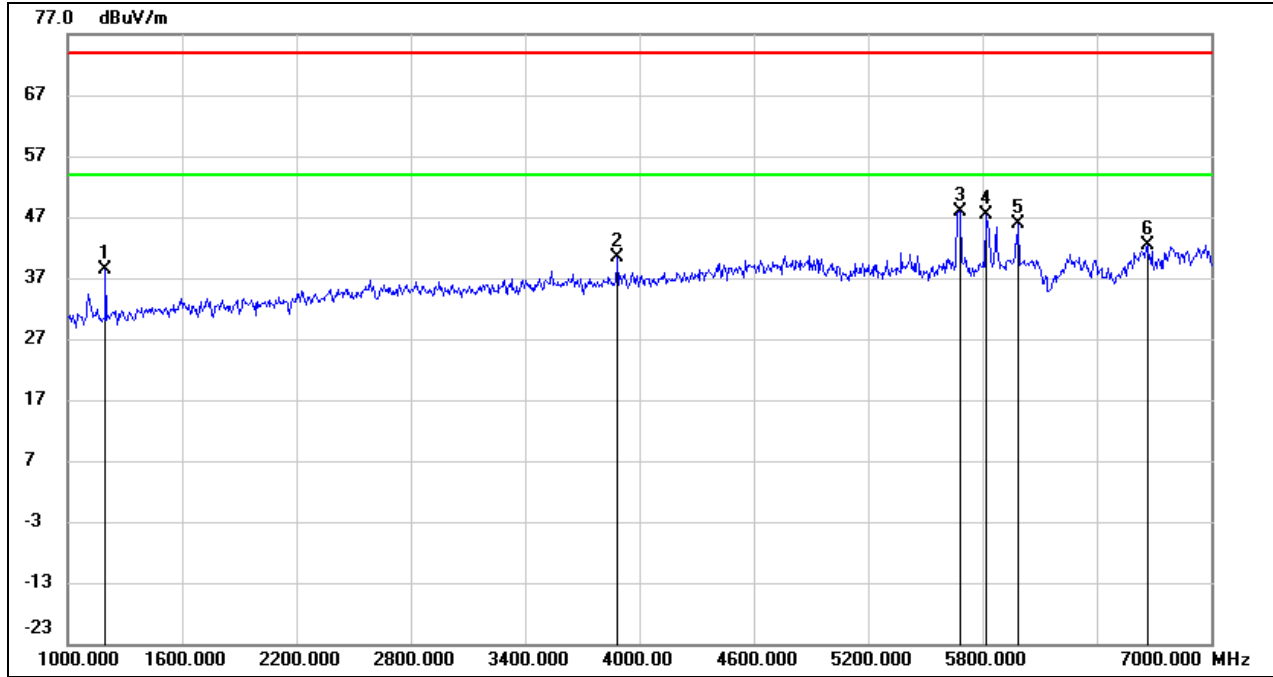


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1198.000	52.52	-14.11	38.41	74.00	-35.59	peak
2	3886.000	45.20	-4.79	40.41	74.00	-33.59	peak
3	5680.000	47.02	0.94	47.96	74.00	-26.04	peak
4	5818.000	46.04	1.33	47.37	74.00	-26.63	peak
5	5986.000	44.16	1.82	45.98	74.00	-28.02	peak
6	6664.000	37.82	4.54	42.36	74.00	-31.64	peak



8.3. SPURIOUS EMISSIONS (7 GHZ ~ 18 GHZ)


Test Mode:	802.11a 20	Channel:	5180 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

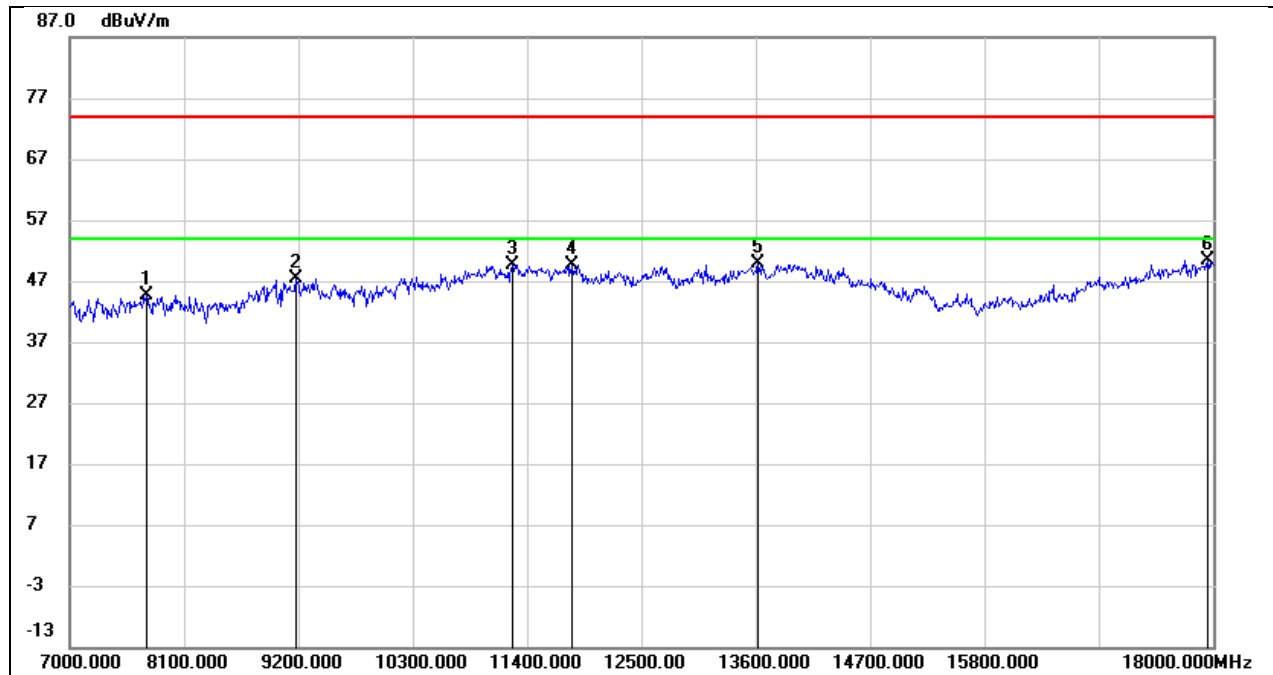

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7737.000	38.04	6.66	44.70	74.00	-29.30	peak
2	9178.000	36.90	10.45	47.35	74.00	-26.65	peak
3	11257.000	33.75	15.78	49.53	74.00	-24.47	peak
4	11829.000	32.29	17.38	49.67	74.00	-24.33	peak
5	13622.000	28.89	20.95	49.84	74.00	-24.16	peak
6	17945.000	24.63	25.75	50.38	74.00	-23.62	peak




Test Mode:	802.11a 20	Channel:	5180 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

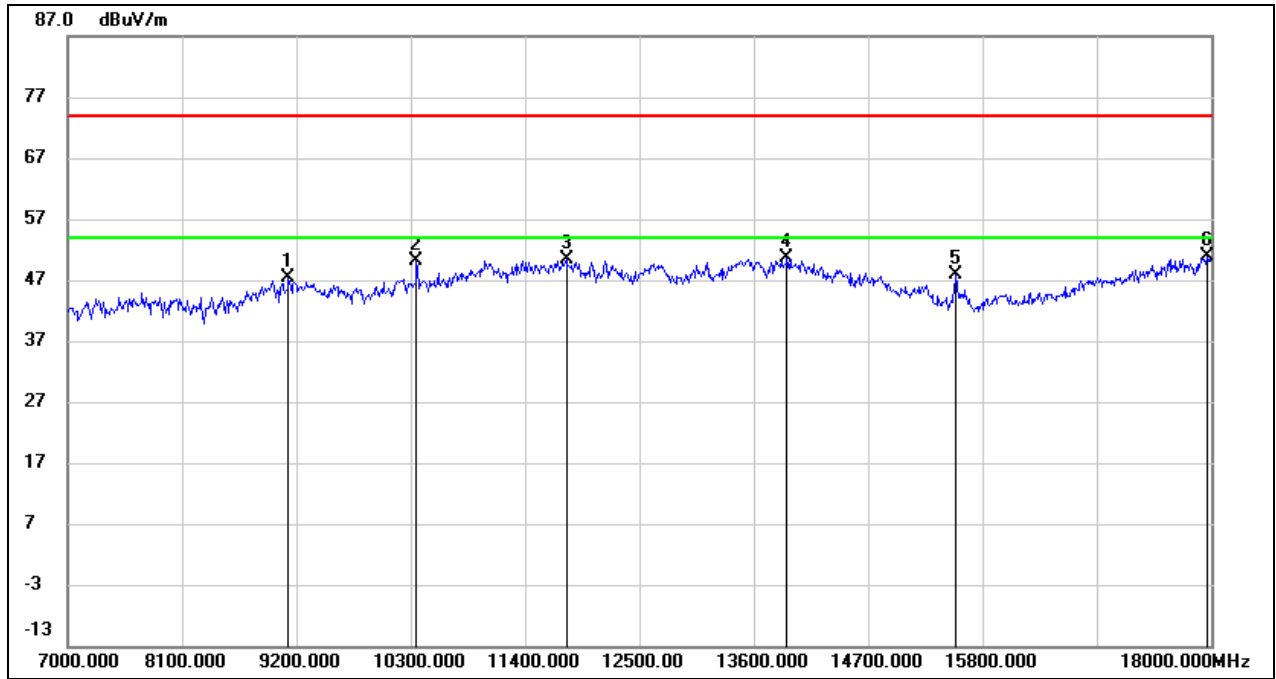

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	36.84	10.42	47.26	74.00	-26.74	peak
2	10355.000	37.49	12.52	50.01	74.00	-23.99	peak
3	11796.000	33.16	17.32	50.48	74.00	-23.52	peak
4	13919.000	29.05	21.68	50.73	74.00	-23.27	peak
5	15547.000	31.11	16.73	47.84	74.00	-26.16	peak
6	17967.000	24.89	25.89	50.78	74.00	-23.22	peak




Test Mode:	802.11a 20	Channel:	5200 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

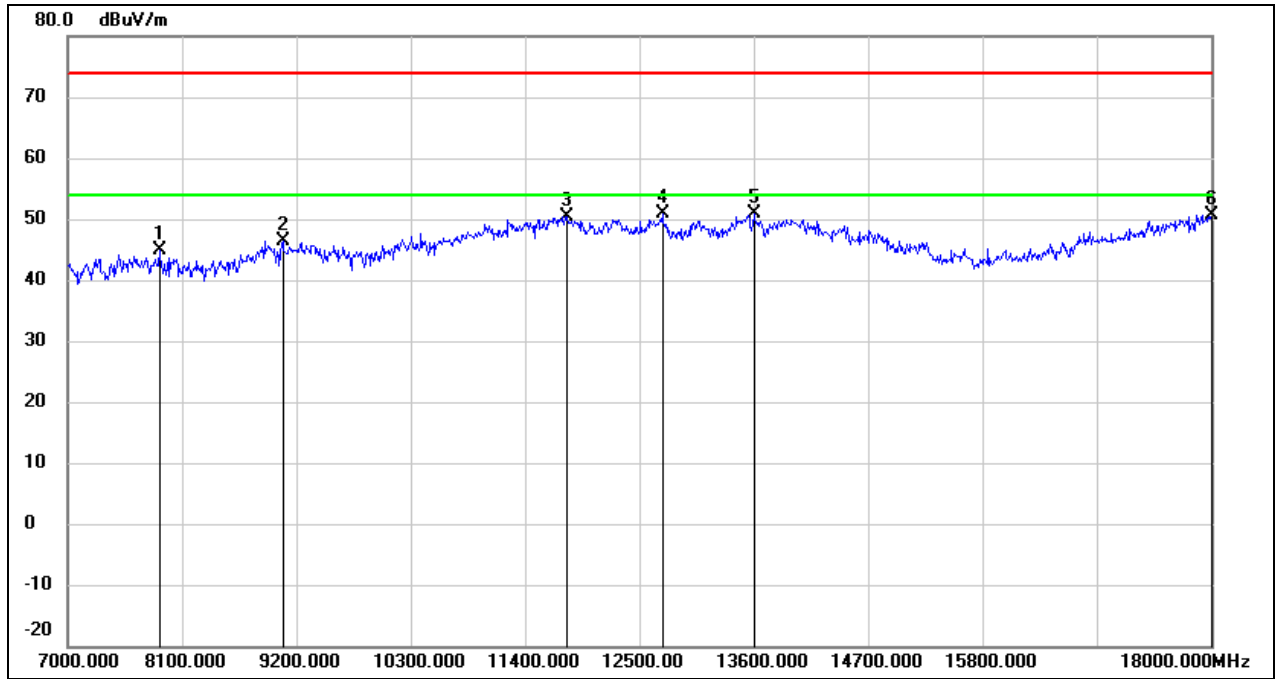

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7880.000	38.34	6.54	44.88	74.00	-29.12	peak
2	9068.000	35.94	10.39	46.33	74.00	-27.67	peak
3	11796.000	33.17	17.32	50.49	74.00	-23.51	peak
4	12720.000	32.74	18.09	50.83	74.00	-23.17	peak
5	13600.000	29.93	20.89	50.82	74.00	-23.18	peak
6	18000.000	24.62	26.12	50.74	74.00	-23.26	peak




Test Mode:	802.11a 20	Channel:	5200 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

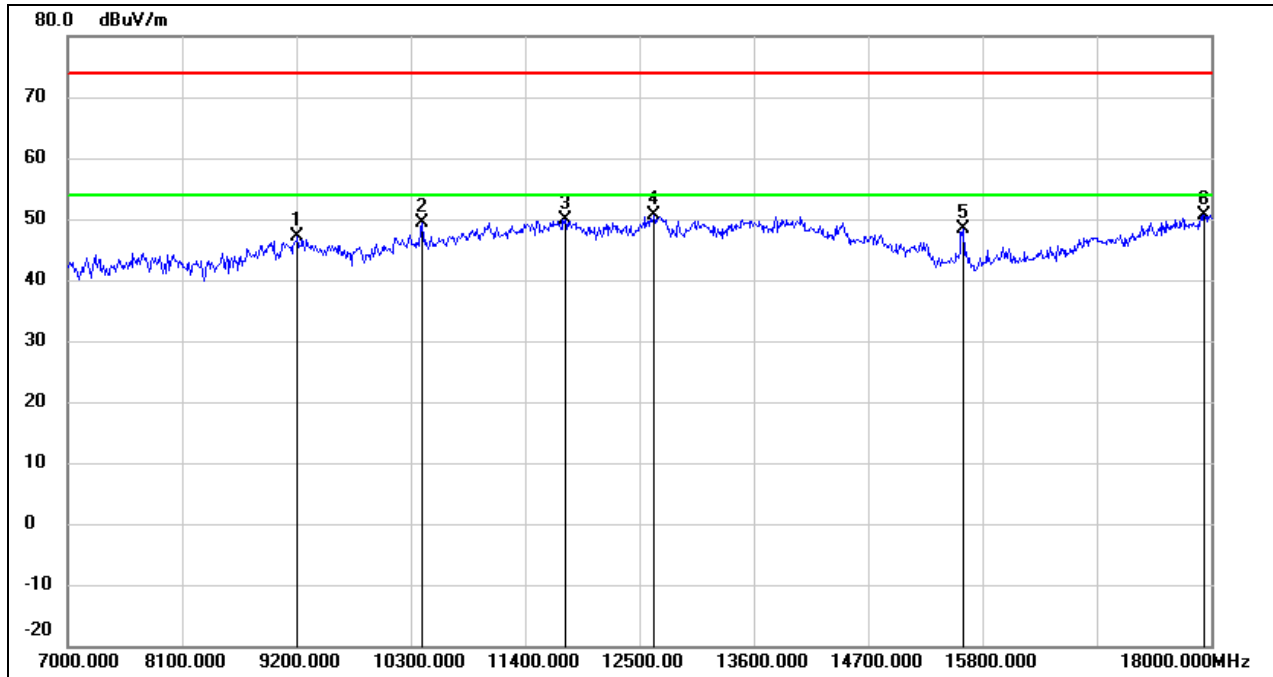

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	36.62	10.47	47.09	74.00	-26.91	peak
2	10410.000	36.85	12.62	49.47	74.00	-24.53	peak
3	11785.000	32.59	17.30	49.89	74.00	-24.11	peak
4	12643.000	32.73	18.01	50.74	74.00	-23.26	peak
5	15613.000	31.51	16.76	48.27	74.00	-25.73	peak
6	17934.000	25.01	25.67	50.68	74.00	-23.32	peak




Test Mode:	802.11a 20	Channel:	5240 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

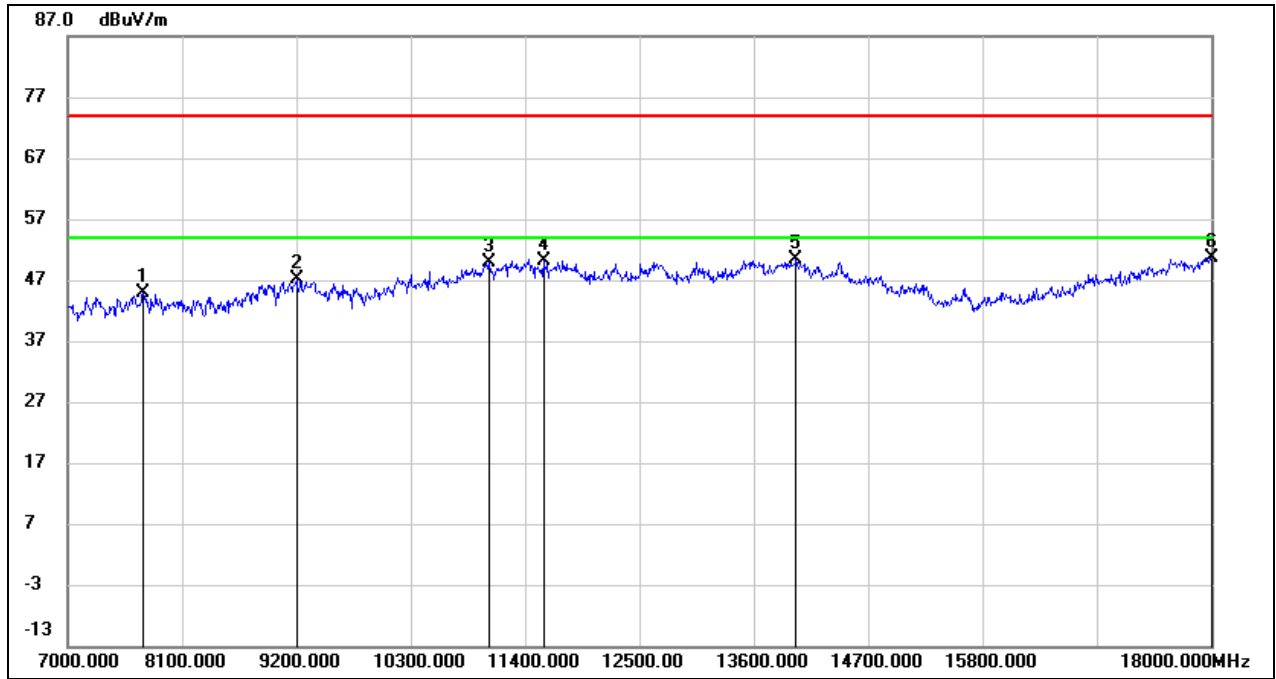

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7726.000	38.29	6.68	44.97	74.00	-29.03	peak
2	9200.000	36.58	10.46	47.04	74.00	-26.96	peak
3	11048.000	35.05	14.91	49.96	74.00	-24.04	peak
4	11576.000	33.32	16.91	50.23	74.00	-23.77	peak
5	14007.000	28.63	21.85	50.48	74.00	-23.52	peak
6	18000.000	24.43	26.12	50.55	74.00	-23.45	peak




Test Mode:	802.11a 20	Channel:	5240 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

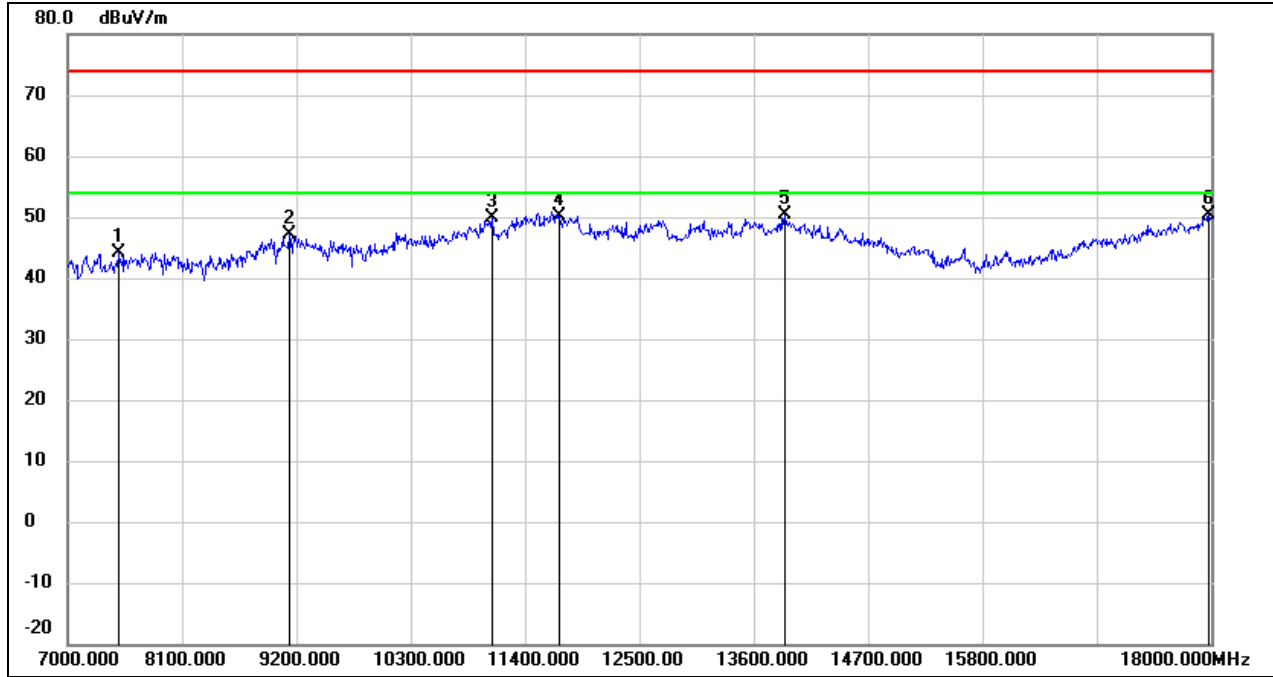

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7484.000	37.30	6.87	44.17	74.00	-29.83	peak
2	9134.000	36.74	10.41	47.15	74.00	-26.85	peak
3	11081.000	34.73	15.05	49.78	74.00	-24.22	peak
4	11730.000	33.01	17.19	50.20	74.00	-23.80	peak
5	13897.000	28.76	21.62	50.38	74.00	-23.62	peak
6	17978.000	24.35	25.97	50.32	74.00	-23.68	peak




Test Mode:	802.11a 20	Channel:	5745 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

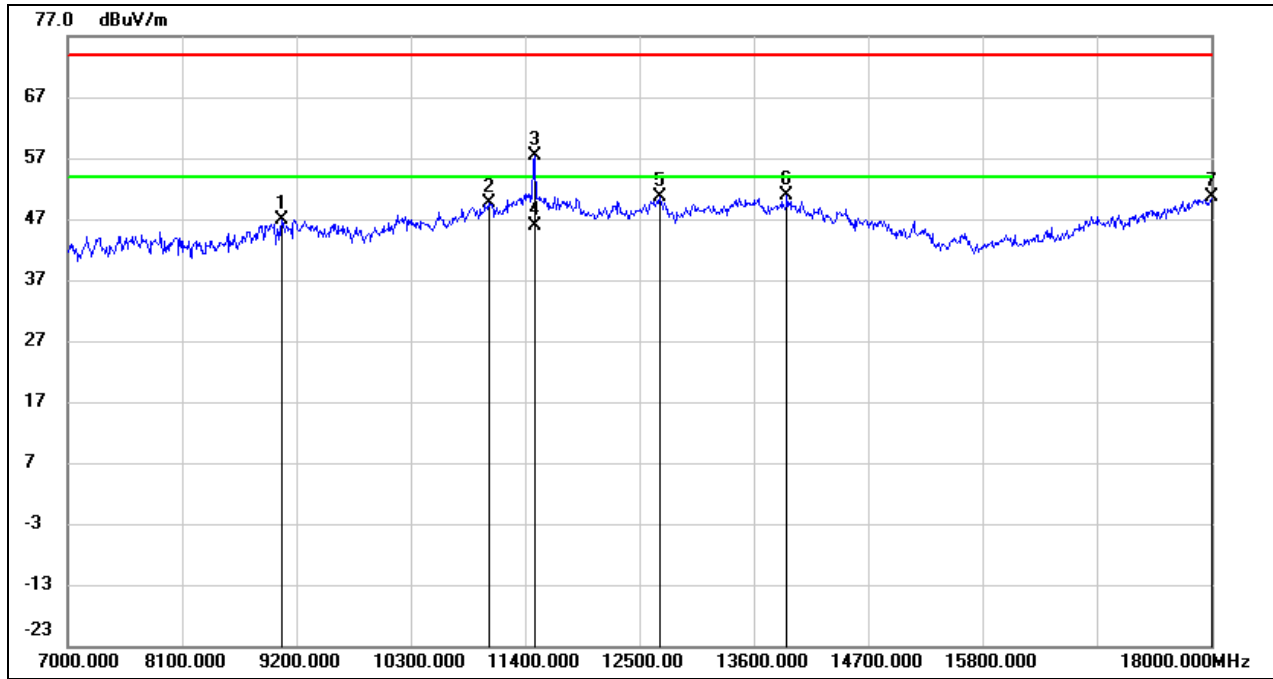

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	36.52	10.38	46.90	74.00	-27.10	peak
2	11048.000	34.83	14.91	49.74	74.00	-24.26	peak
3	11488.000	40.67	16.72	57.39	74.00	-16.61	peak
4	11488.000	29.17	16.72	45.89	54.00	-8.11	AVG
5	12698.000	32.65	18.08	50.73	74.00	-23.27	peak
6	13919.000	29.27	21.68	50.95	74.00	-23.05	peak
7	18000.000	24.48	26.12	50.60	74.00	-23.40	peak




Test Mode:	802.11a 20	Channel:	5745 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

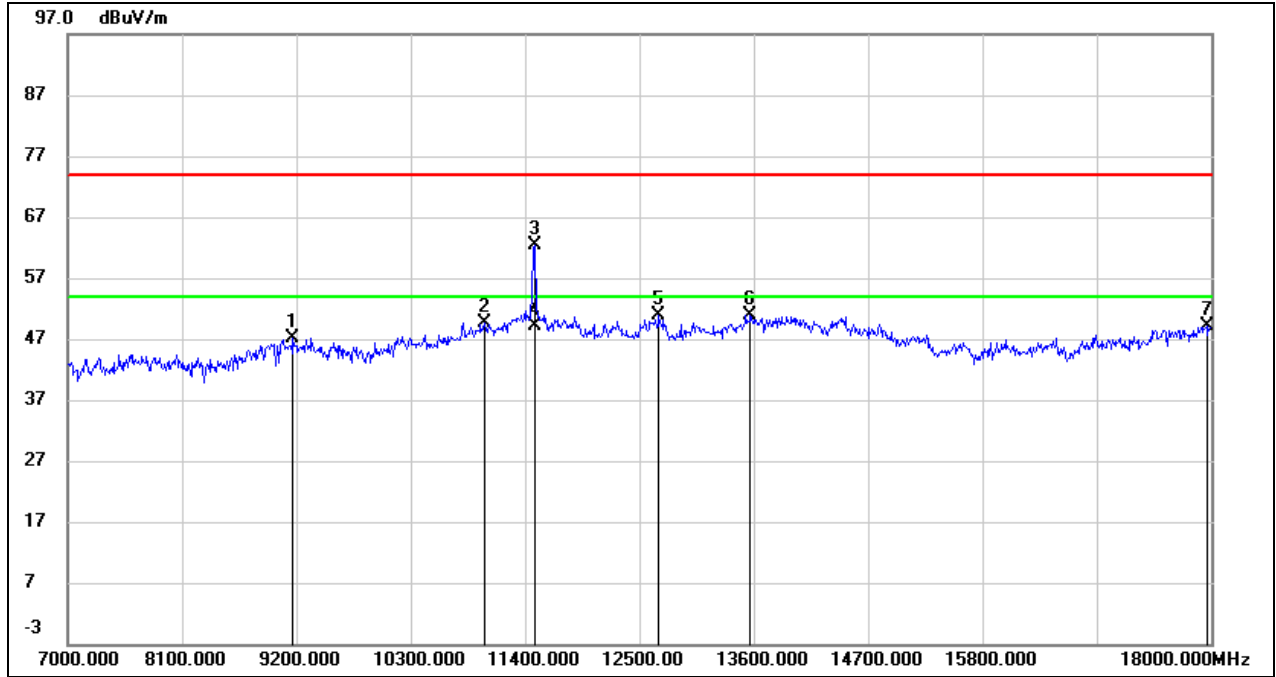

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9167.000	36.74	10.45	47.19	74.00	-26.81	peak
2	11004.000	34.86	14.74	49.60	74.00	-24.40	peak
3	11488.000	45.62	16.72	62.34	74.00	-11.66	peak
4	11488.000	32.48	16.72	49.20	54.00	-4.80	AVG
5	12687.000	32.93	18.05	50.98	74.00	-23.02	peak
6	13567.000	30.09	20.80	50.89	74.00	-23.11	peak
7	17956.000	23.43	25.82	49.25	74.00	-24.75	peak




Test Mode:	802.11a 20	Channel:	5785 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

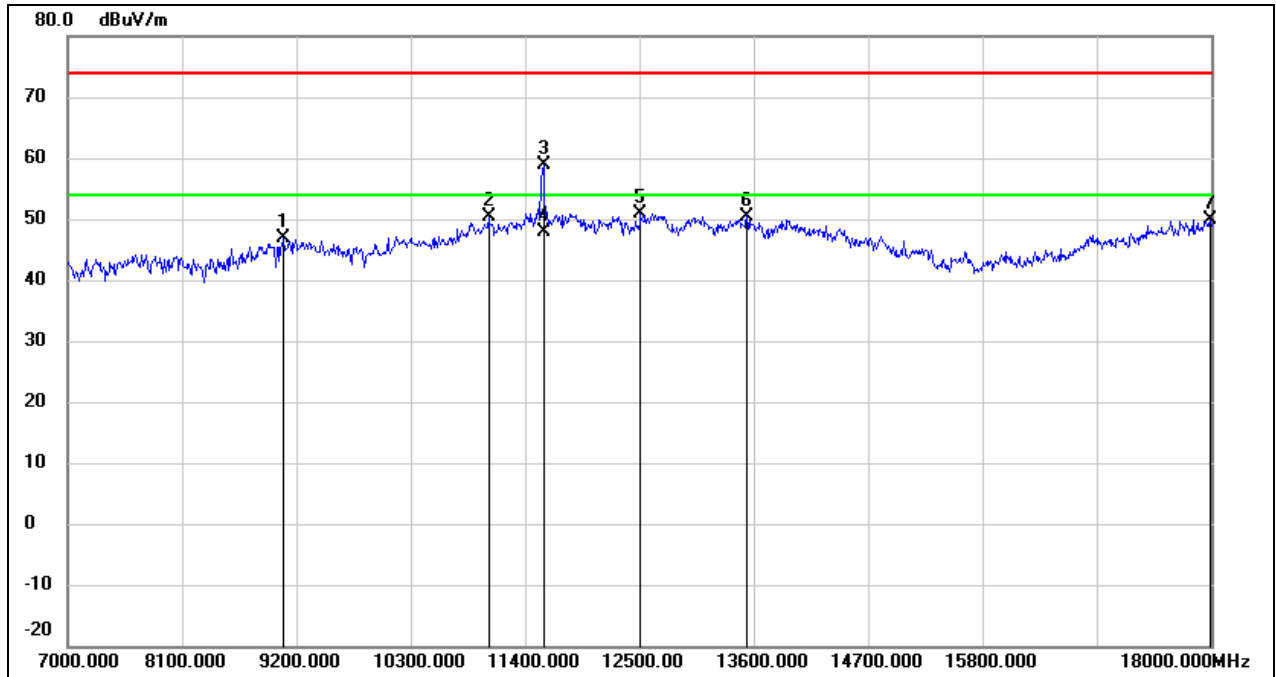

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9079.000	36.42	10.39	46.81	74.00	-27.19	peak
2	11048.000	35.37	14.91	50.28	74.00	-23.72	peak
3	11576.000	42.08	16.91	58.99	74.00	-15.01	peak
4	11576.000	30.86	16.91	47.77	54.00	-6.23	AVG
5	12511.000	33.15	17.84	50.99	74.00	-23.01	peak
6	13534.000	29.77	20.73	50.50	74.00	-23.50	peak
7	17989.000	23.89	26.04	49.93	74.00	-24.07	peak




Test Mode:	802.11a 20	Channel:	5785 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

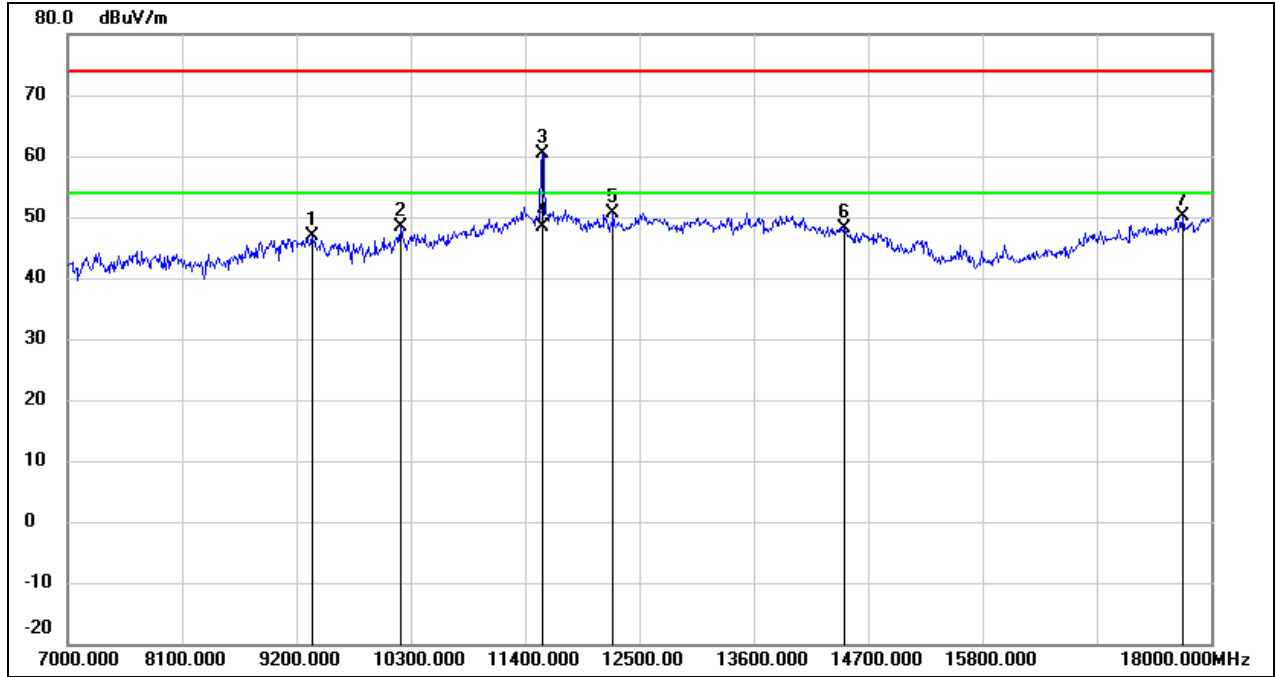

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9354.000	36.35	10.56	46.91	74.00	-27.09	peak
2	10201.000	36.26	12.19	48.45	74.00	-25.55	peak
3	11565.000	43.43	16.89	60.32	74.00	-13.68	peak
4	11565.000	31.38	16.89	48.27	54.00	-5.73	AVG
5	12247.000	32.89	17.77	50.66	74.00	-23.34	peak
6	14469.000	28.19	19.91	48.10	74.00	-25.90	peak
7	17725.000	25.91	24.24	50.15	74.00	-23.85	peak




Test Mode:	802.11a 20	Channel:	5825 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

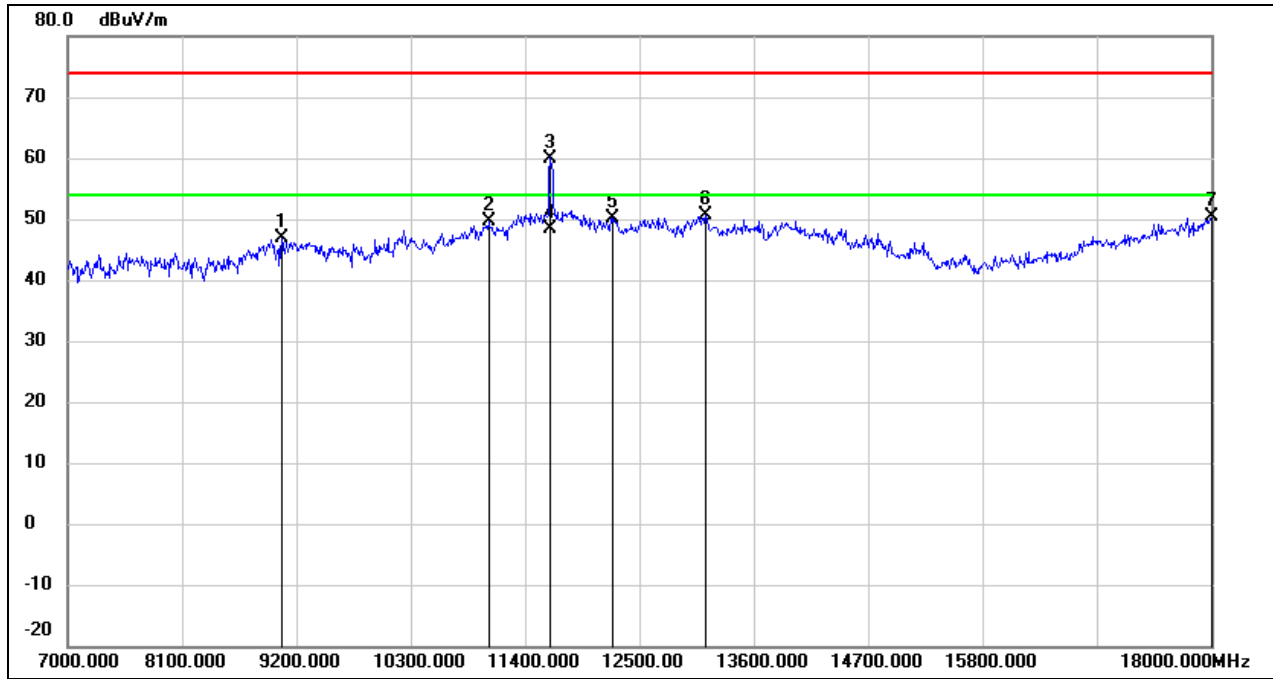

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	36.46	10.38	46.84	74.00	-27.16	peak
2	11048.000	34.65	14.91	49.56	74.00	-24.44	peak
3	11642.000	42.97	17.03	60.00	74.00	-14.00	peak
4	11642.000	31.30	17.03	48.33	54.00	-5.67	AVG
5	12236.000	32.49	17.76	50.25	74.00	-23.75	peak
6	13138.000	31.62	19.05	50.67	74.00	-23.33	peak
7	18000.000	24.24	26.12	50.36	74.00	-23.64	peak




Test Mode:	802.11a 20	Channel:	5825 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

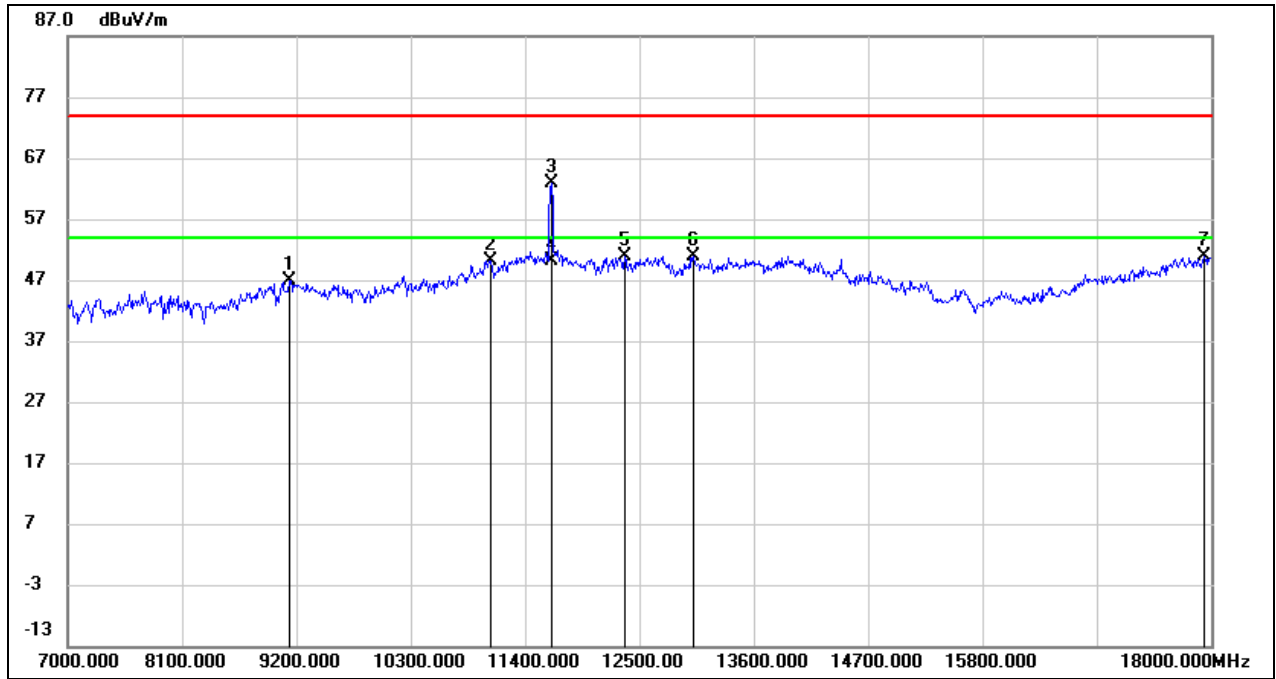

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	36.57	10.41	46.98	74.00	-27.02	peak
2	11070.000	35.19	15.01	50.20	74.00	-23.80	peak
3	11653.000	45.75	17.05	62.80	74.00	-11.20	peak
4	11653.000	33.18	17.05	50.23	54.00	-3.77	AVG
5	12357.000	32.97	17.79	50.76	74.00	-23.24	peak
6	13017.000	32.27	18.53	50.80	74.00	-23.20	peak
7	17934.000	25.17	25.67	50.84	74.00	-23.16	peak




Test Mode:	802.11n HT20	Channel:	5180 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

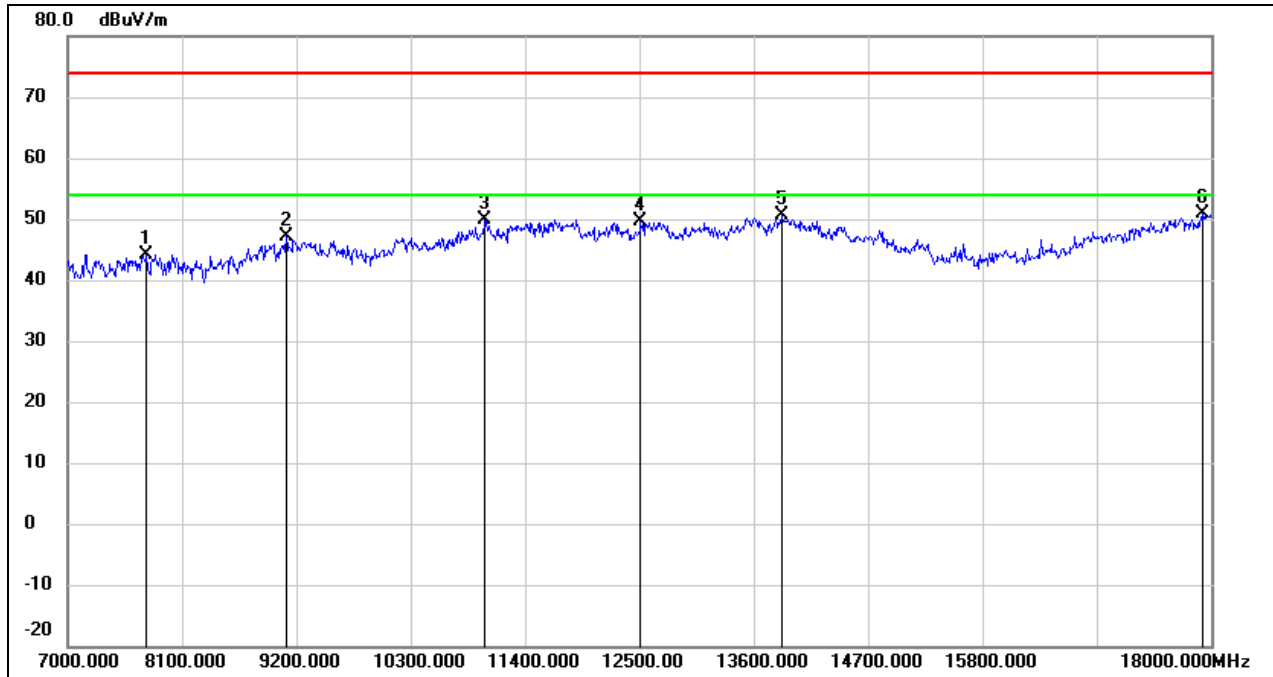

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7759.000	37.56	6.64	44.20	74.00	-29.80	peak
2	9101.000	36.63	10.40	47.03	74.00	-26.97	peak
3	11015.000	35.21	14.79	50.00	74.00	-24.00	peak
4	12511.000	31.81	17.84	49.65	74.00	-24.35	peak
5	13875.000	29.09	21.57	50.66	74.00	-23.34	peak
6	17923.000	25.27	25.60	50.87	74.00	-23.13	peak




Test Mode:	802.11n HT20	Channel:	5180 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

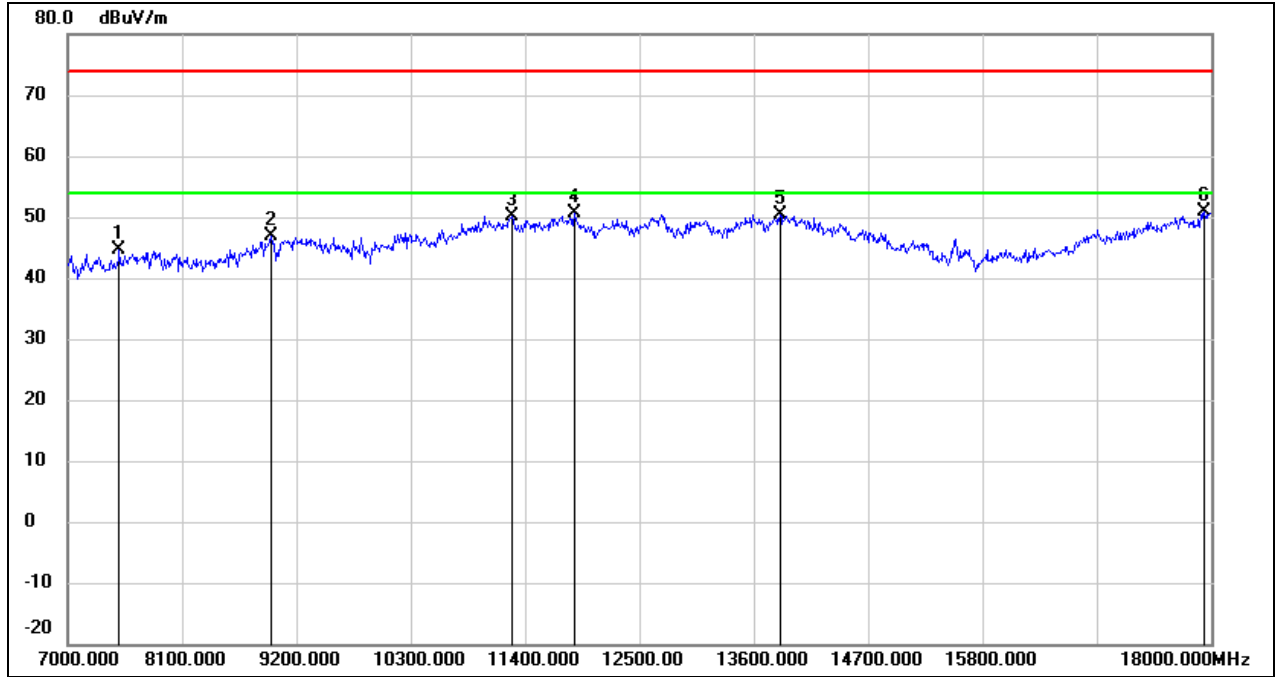

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	37.67	6.87	44.54	74.00	-29.46	peak
2	8958.000	36.86	10.05	46.91	74.00	-27.09	peak
3	11268.000	34.37	15.83	50.20	74.00	-23.80	peak
4	11873.000	33.10	17.46	50.56	74.00	-23.44	peak
5	13853.000	28.84	21.52	50.36	74.00	-23.64	peak
6	17934.000	25.18	25.67	50.85	74.00	-23.15	peak




Test Mode:	802.11n HT20	Channel:	5200 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

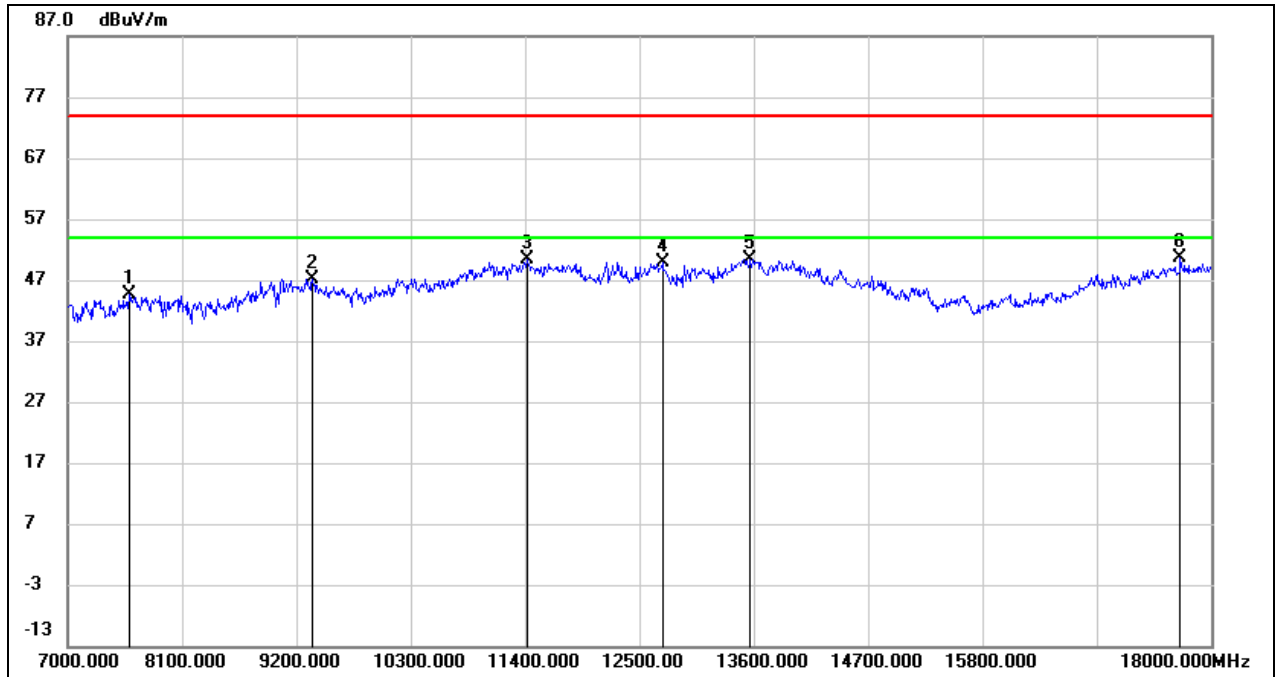

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7594.000	37.76	6.79	44.55	74.00	-29.45	peak
2	9354.000	36.65	10.56	47.21	74.00	-26.79	peak
3	11422.000	33.99	16.46	50.45	74.00	-23.55	peak
4	12720.000	31.81	18.09	49.90	74.00	-24.10	peak
5	13567.000	29.59	20.80	50.39	74.00	-23.61	peak
6	17703.000	26.60	24.09	50.69	74.00	-23.31	peak




Test Mode:	802.11n HT20	Channel:	5200 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

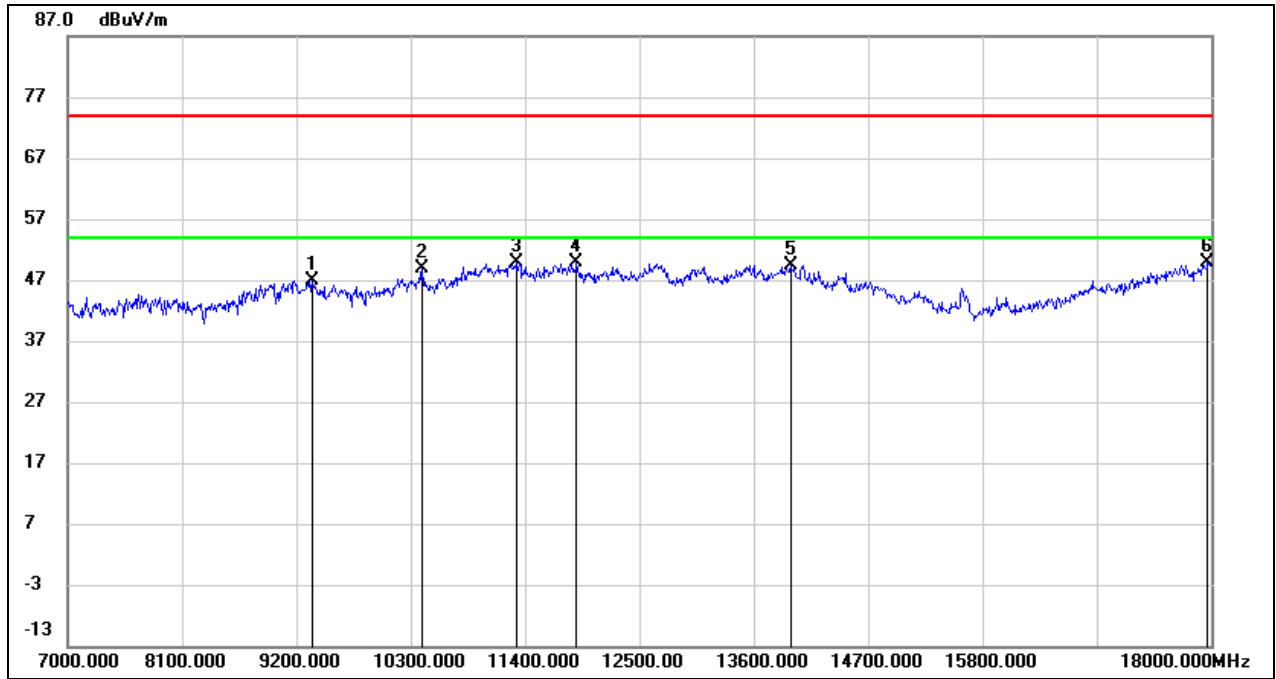

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9354.000	36.22	10.56	46.78	74.00	-27.22	peak
2	10410.000	36.35	12.62	48.97	74.00	-25.03	peak
3	11323.000	33.71	16.05	49.76	74.00	-24.24	peak
4	11895.000	32.31	17.51	49.82	74.00	-24.18	peak
5	13952.000	27.67	21.76	49.43	74.00	-24.57	peak
6	17967.000	24.01	25.89	49.90	74.00	-24.10	peak




Test Mode:	802.11n HT20	Channel:	5240 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

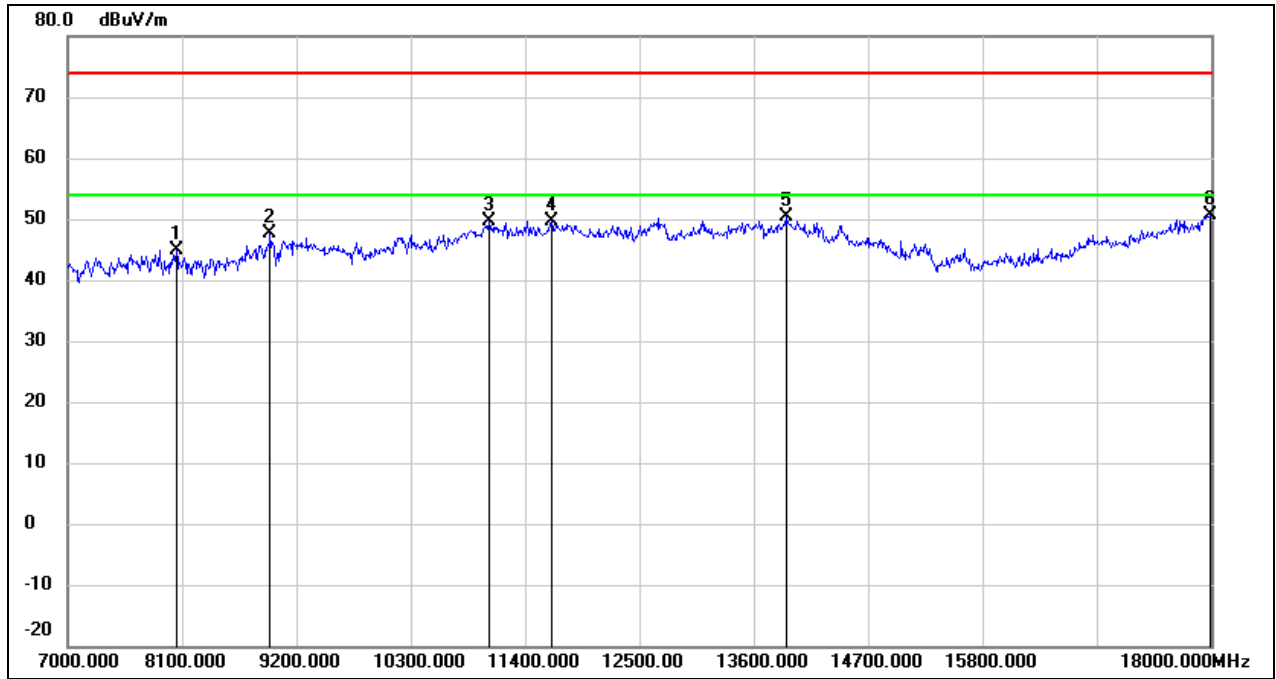

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8045.000	38.50	6.47	44.97	74.00	-29.03	peak
2	8947.000	37.61	9.98	47.59	74.00	-26.41	peak
3	11048.000	34.64	14.91	49.55	74.00	-24.45	peak
4	11653.000	32.60	17.05	49.65	74.00	-24.35	peak
5	13908.000	28.64	21.66	50.30	74.00	-23.70	peak
6	17989.000	24.62	26.04	50.66	74.00	-23.34	peak




Test Mode:	802.11n HT20	Channel:	5240 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

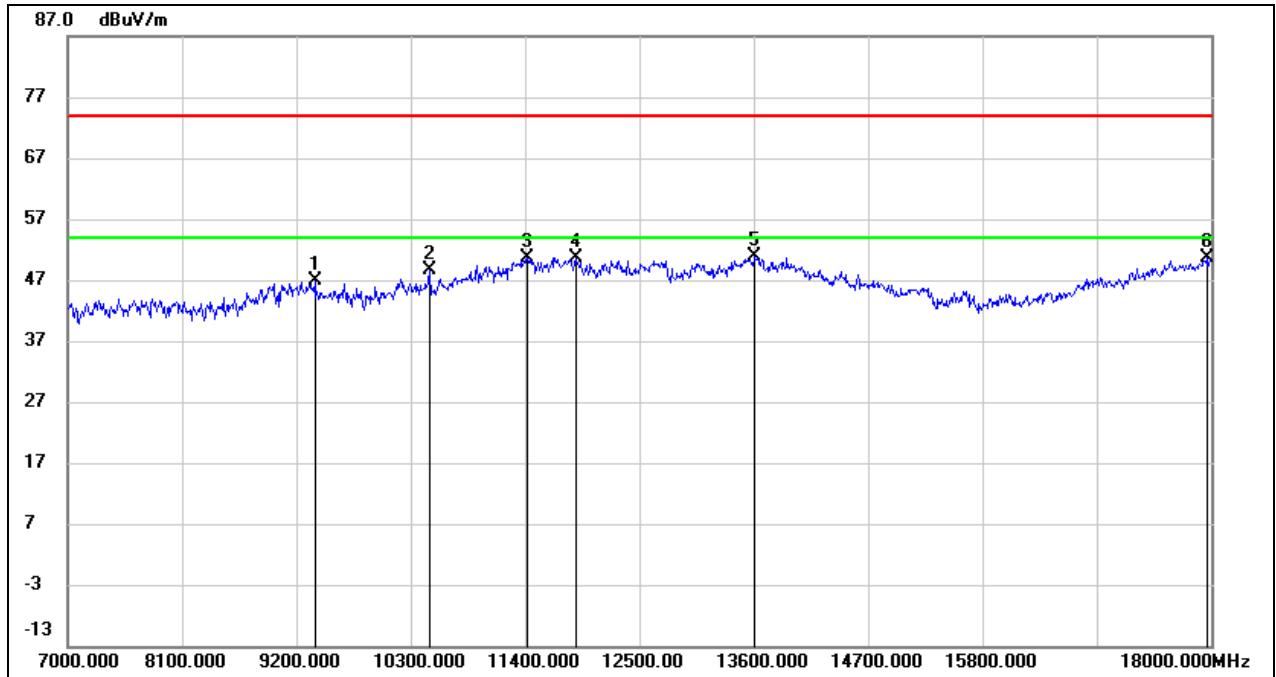

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9376.000	36.26	10.58	46.84	74.00	-27.16	peak
2	10476.000	35.97	12.77	48.74	74.00	-25.26	peak
3	11422.000	34.21	16.46	50.67	74.00	-23.33	peak
4	11884.000	33.22	17.48	50.70	74.00	-23.30	peak
5	13611.000	29.95	20.92	50.87	74.00	-23.13	peak
6	17956.000	24.72	25.82	50.54	74.00	-23.46	peak




Test Mode:	802.11n HT20	Channel:	5745 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

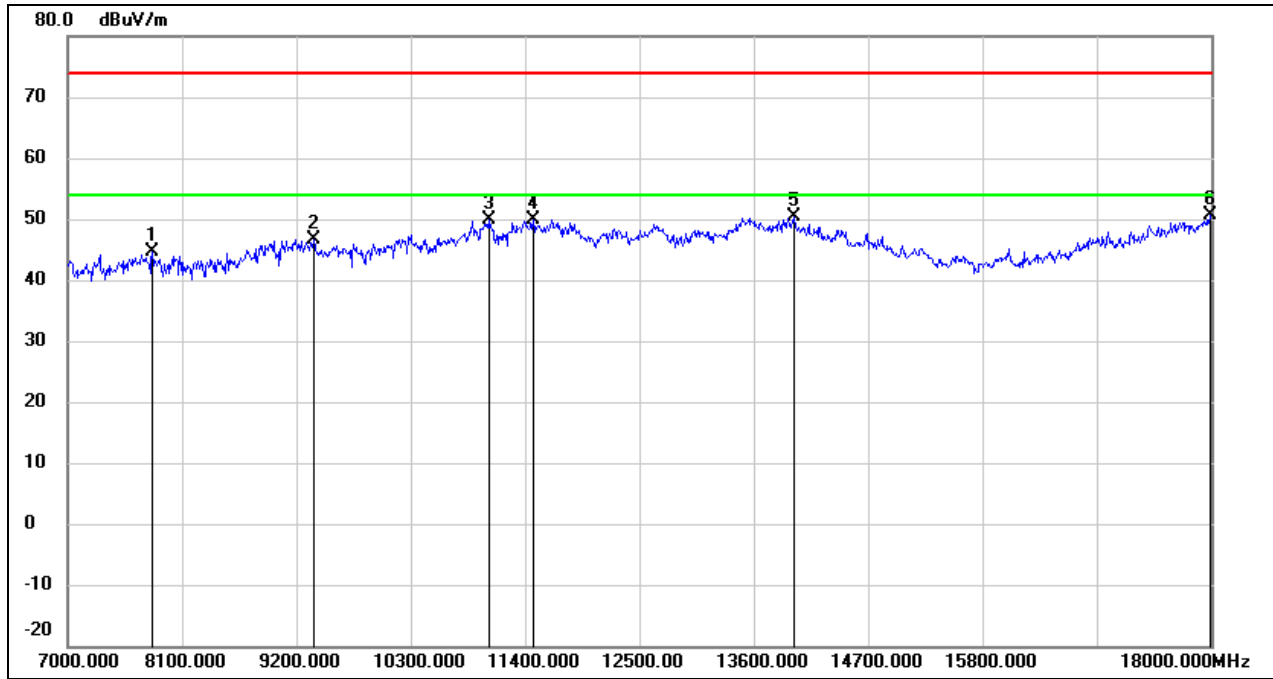

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7814.000	37.99	6.60	44.59	74.00	-29.41	peak
2	9365.000	36.11	10.57	46.68	74.00	-27.32	peak
3	11048.000	34.96	14.91	49.87	74.00	-24.13	peak
4	11477.000	33.21	16.67	49.88	74.00	-24.12	peak
5	13985.000	28.47	21.85	50.32	74.00	-23.68	peak
6	17989.000	24.64	26.04	50.68	74.00	-23.32	peak




Test Mode:	802.11n HT20	Channel:	5745 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

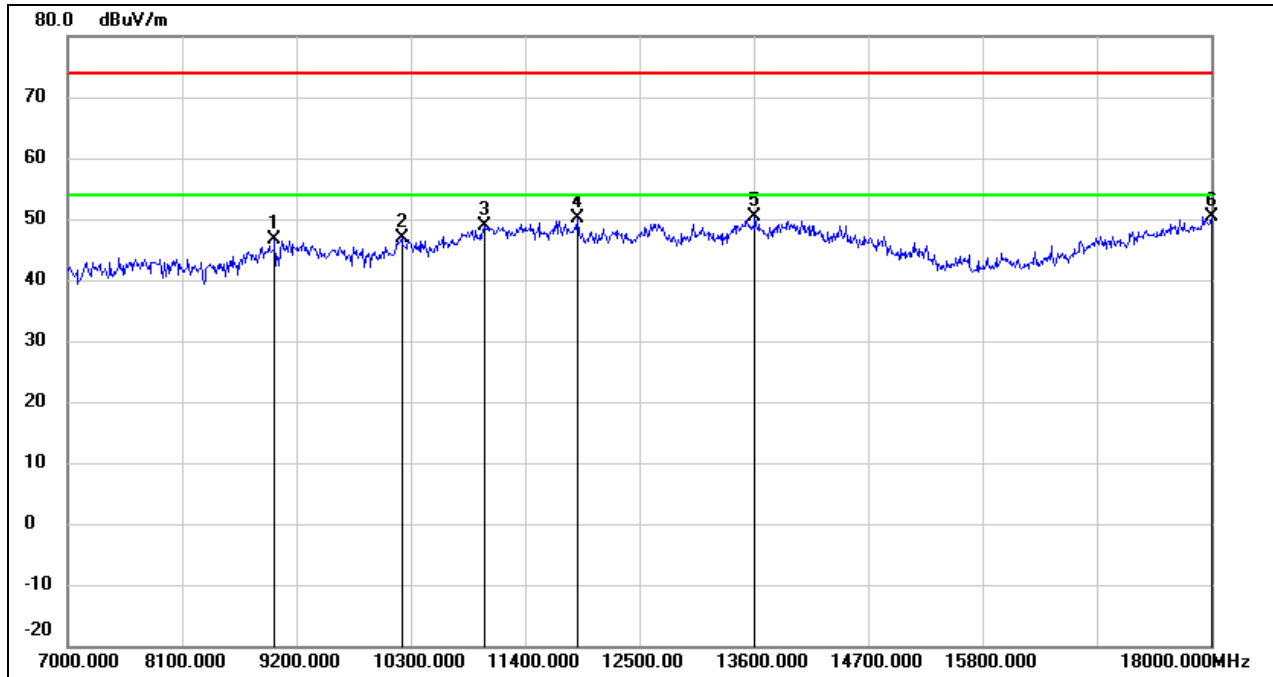

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8991.000	36.28	10.28	46.56	74.00	-27.44	peak
2	10212.000	34.57	12.21	46.78	74.00	-27.22	peak
3	11015.000	34.17	14.79	48.96	74.00	-25.04	peak
4	11906.000	32.66	17.52	50.18	74.00	-23.82	peak
5	13611.000	29.41	20.92	50.33	74.00	-23.67	peak
6	18000.000	24.23	26.12	50.35	74.00	-23.65	peak




Test Mode:	802.11n HT20	Channel:	5785 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

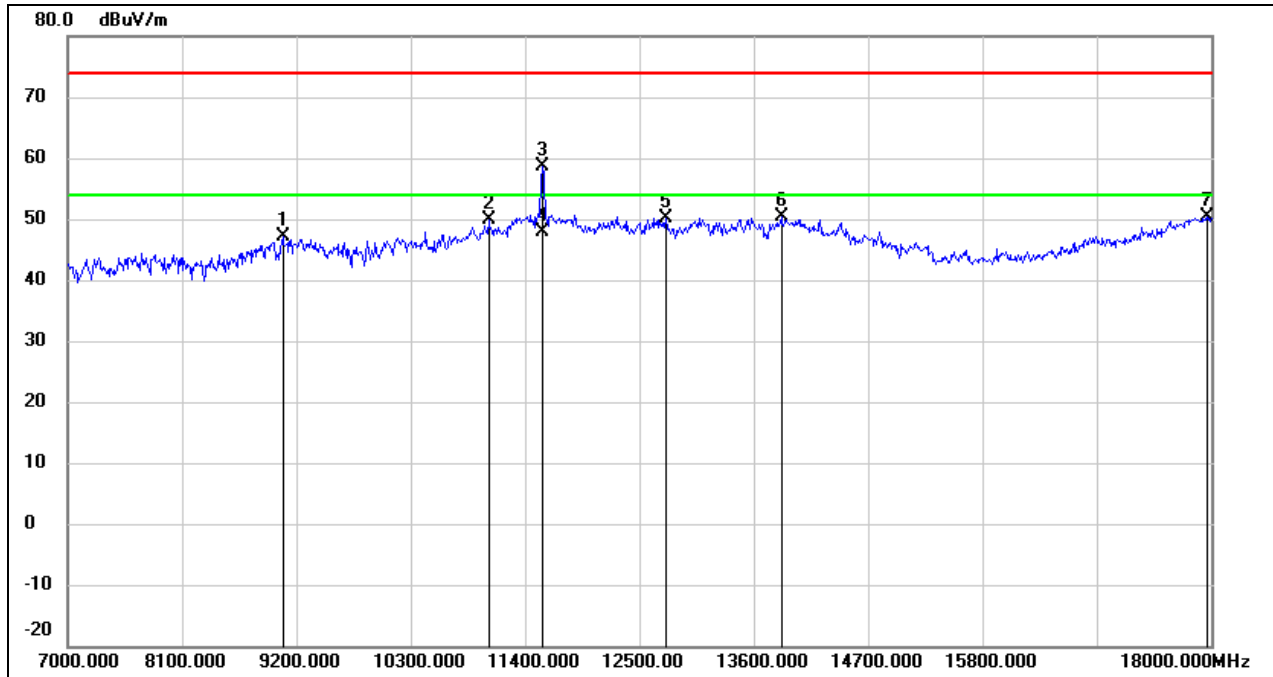

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9068.000	36.67	10.39	47.06	74.00	-26.94	peak
2	11048.000	34.92	14.91	49.83	74.00	-24.17	peak
3	11565.000	41.72	16.89	58.61	74.00	-15.39	peak
4	11565.000	30.92	16.89	47.81	54.00	-6.19	AVG
5	12753.000	32.06	18.14	50.20	74.00	-23.80	peak
6	13864.000	28.73	21.53	50.26	74.00	-23.74	peak
7	17956.000	24.62	25.82	50.44	74.00	-23.56	peak




Test Mode:	802.11n HT20	Channel:	5785 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

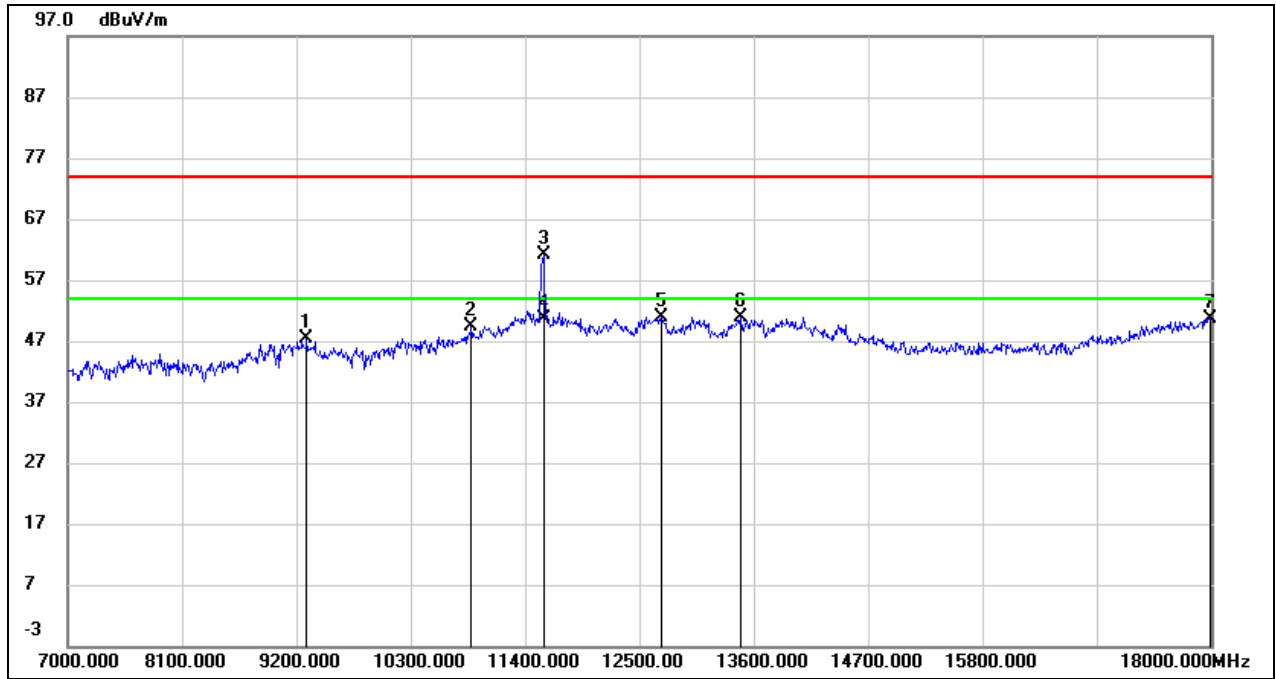

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9299.000	36.78	10.53	47.31	74.00	-26.69	peak
2	10883.000	35.15	14.27	49.42	74.00	-24.58	peak
3	11576.000	44.20	16.91	61.11	74.00	-12.89	peak
4	11576.000	33.81	16.91	50.72	54.00	-3.28	AVG
5	12709.000	32.82	18.09	50.91	74.00	-23.09	peak
6	13468.000	30.41	20.50	50.91	74.00	-23.09	peak
7	17989.000	24.69	26.04	50.73	74.00	-23.27	peak




Test Mode:	802.11n HT20	Channel:	5825 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

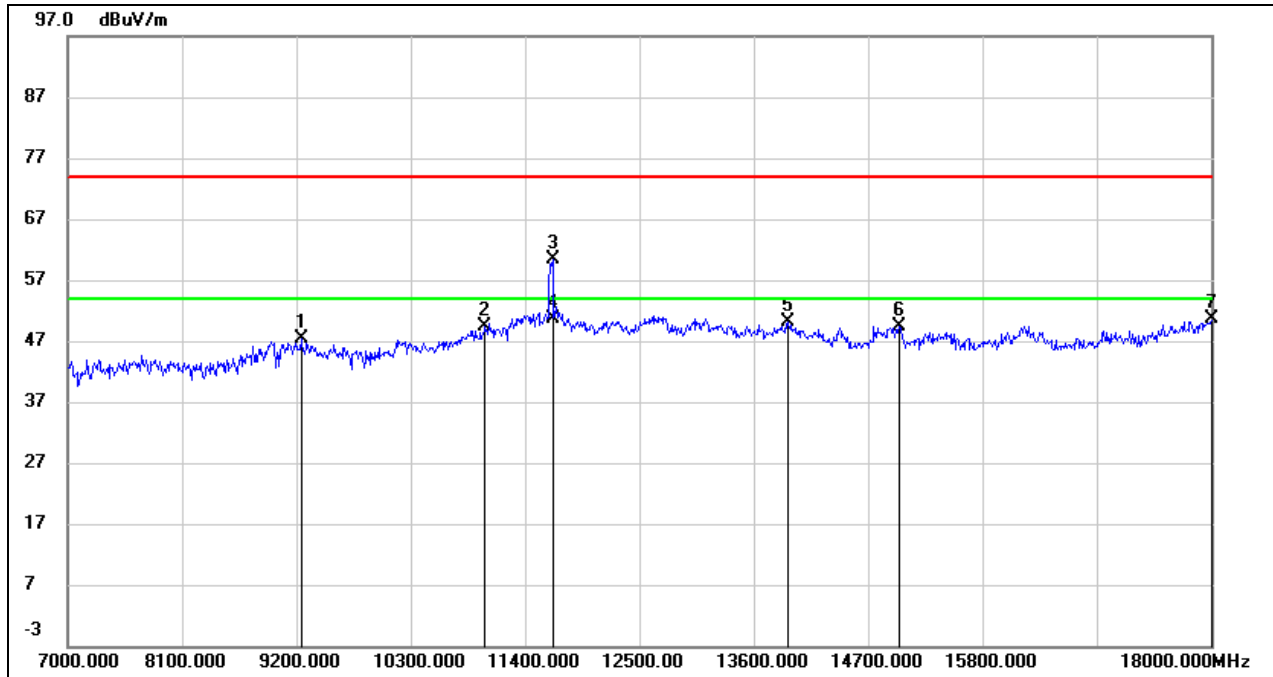

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	36.81	10.49	47.30	74.00	-26.70	peak
2	11015.000	34.54	14.79	49.33	74.00	-24.67	peak
3	11664.000	43.18	17.08	60.26	74.00	-13.74	peak
4	11664.000	33.55	17.08	50.63	54.00	-3.37	AVG
5	13930.000	28.51	21.71	50.22	74.00	-23.78	peak
6	14997.000	31.80	17.68	49.48	74.00	-24.52	peak
7	18000.000	24.60	26.12	50.72	74.00	-23.28	peak




Test Mode:	802.11n HT20	Channel:	5825 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

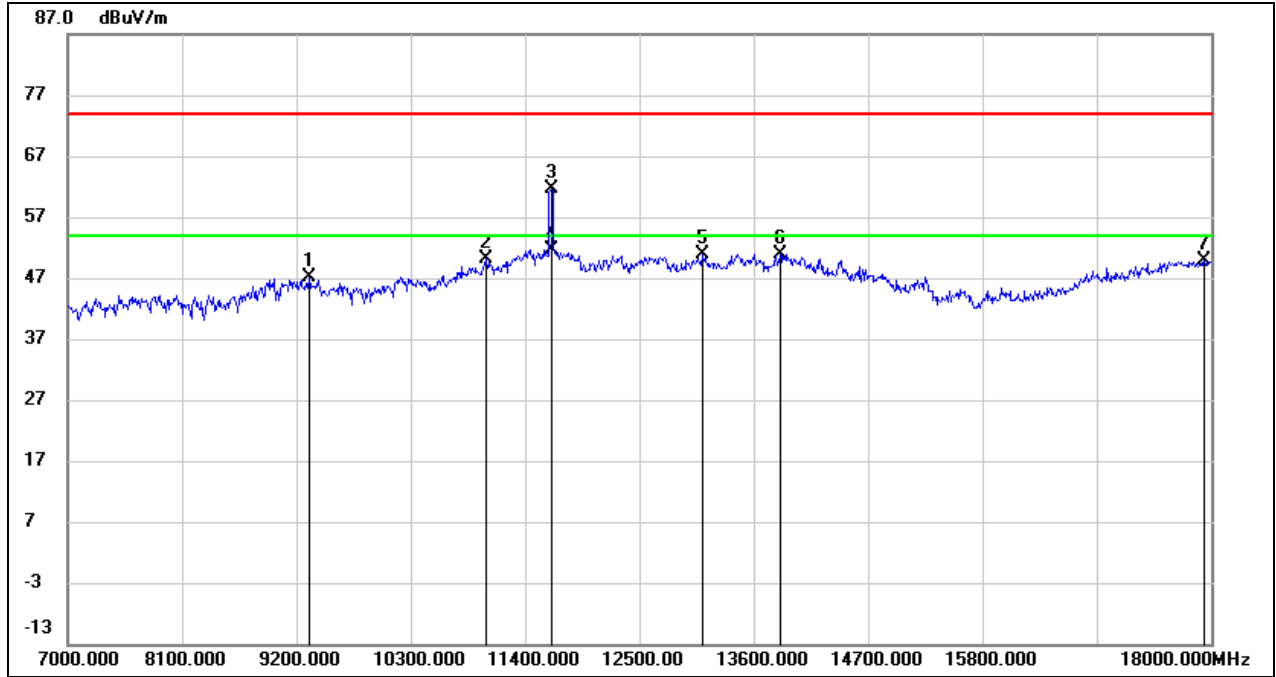

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9321.000	36.72	10.53	47.25	74.00	-26.75	peak
2	11026.000	35.20	14.82	50.02	74.00	-23.98	peak
3	11653.000	44.65	17.05	61.70	74.00	-12.30	peak
4	11653.000	34.57	17.05	51.62	54.00	-2.38	AVG
5	13105.000	32.03	18.91	50.94	74.00	-23.06	peak
6	13853.000	29.47	21.52	50.99	74.00	-23.01	peak
7	17934.000	24.24	25.67	49.91	74.00	-24.09	peak




Test Mode:	802.11n HT40	Channel:	5190 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

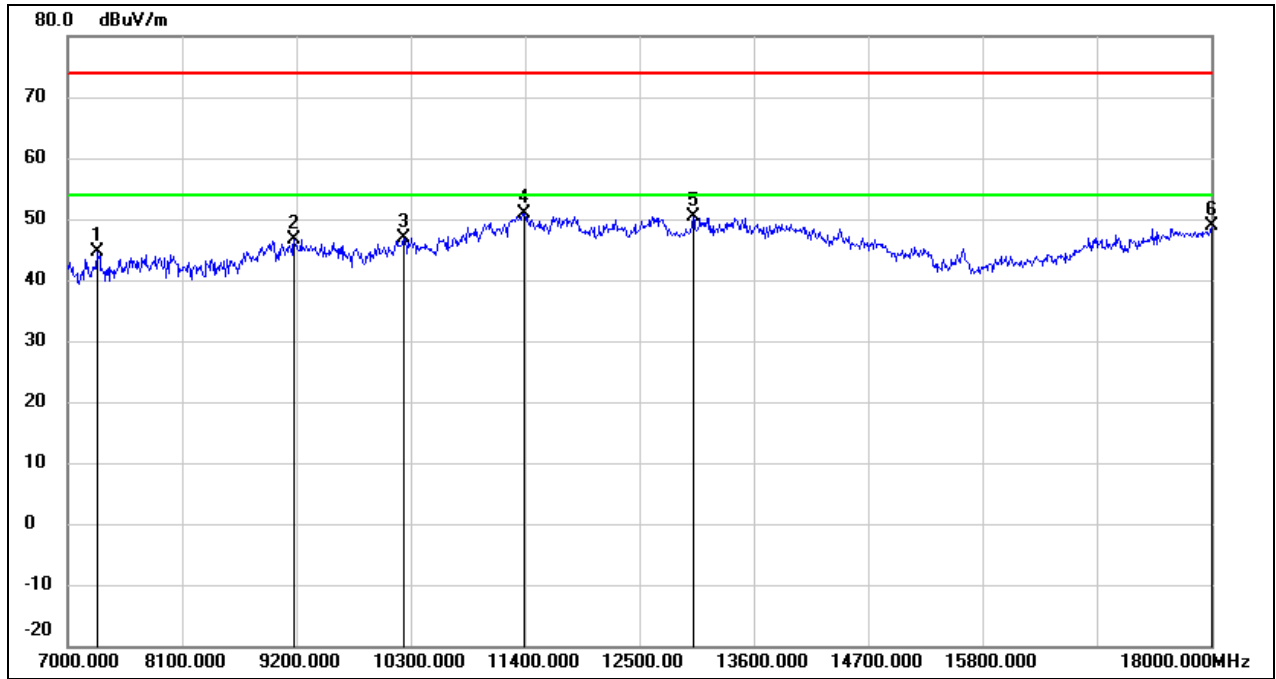

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	37.59	6.94	44.53	74.00	-29.47	peak
2	9178.000	36.21	10.45	46.66	74.00	-27.34	peak
3	10234.000	34.65	12.26	46.91	74.00	-27.09	peak
4	11389.000	34.63	16.31	50.94	74.00	-23.06	peak
5	13017.000	31.74	18.53	50.27	74.00	-23.73	peak
6	18000.000	22.80	26.12	48.92	74.00	-25.08	peak




Test Mode:	802.11n HT40	Channel:	5190 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

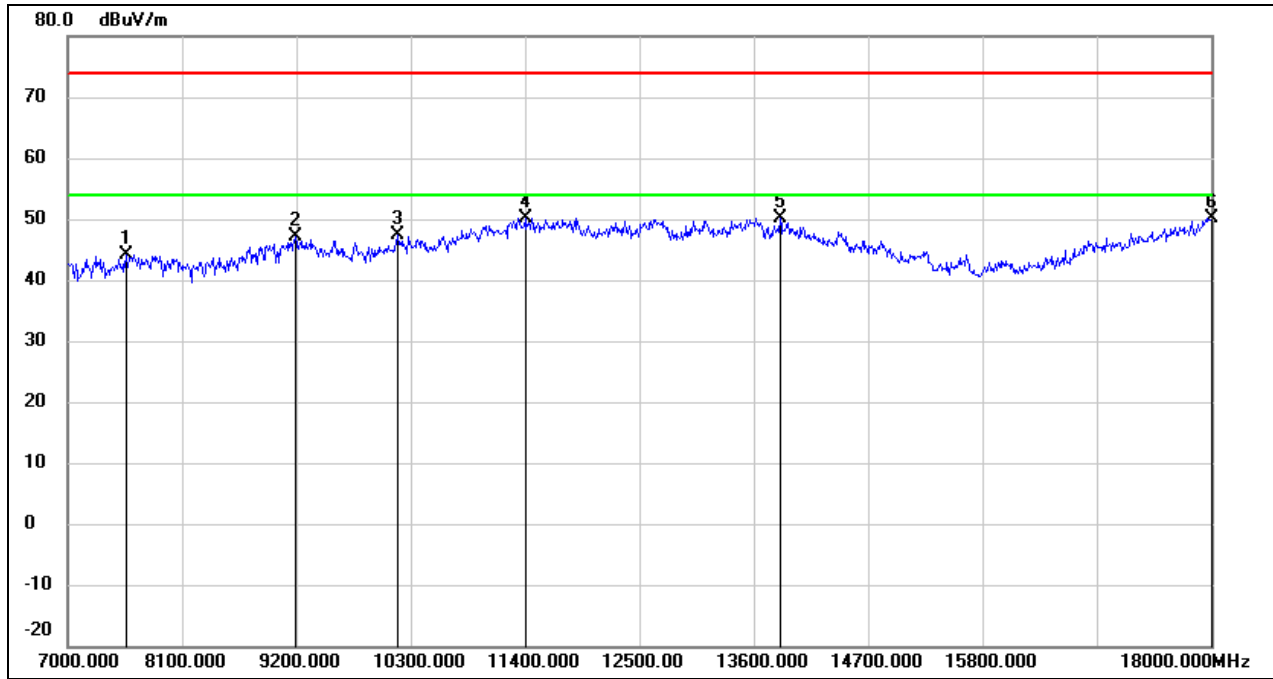

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7561.000	37.33	6.82	44.15	74.00	-29.85	peak
2	9189.000	36.62	10.46	47.08	74.00	-26.92	peak
3	10179.000	35.19	12.14	47.33	74.00	-26.67	peak
4	11400.000	33.76	16.36	50.12	74.00	-23.88	peak
5	13853.000	28.65	21.52	50.17	74.00	-23.83	peak
6	18000.000	24.12	26.12	50.24	74.00	-23.76	peak




Test Mode:	802.11n HT40	Channel:	5230 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

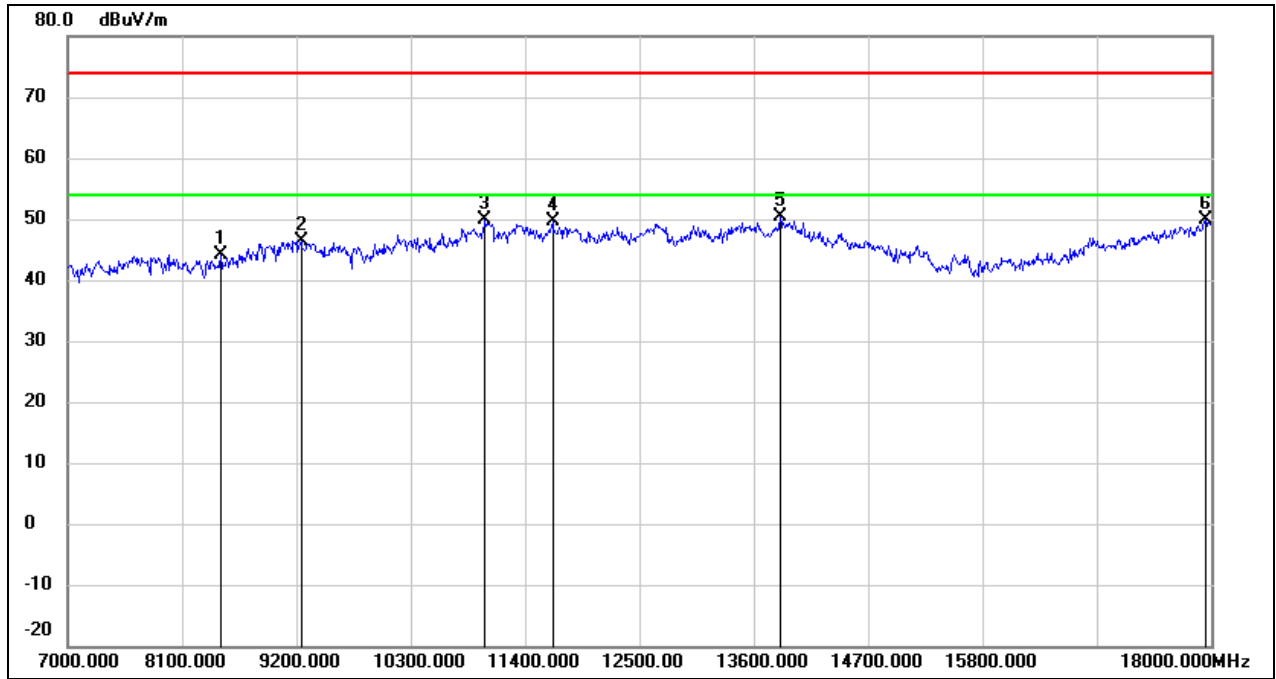

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8474.000	37.21	6.86	44.07	74.00	-29.93	peak
2	9244.000	35.88	10.49	46.37	74.00	-27.63	peak
3	11015.000	35.18	14.79	49.97	74.00	-24.03	peak
4	11664.000	32.49	17.08	49.57	74.00	-24.43	peak
5	13853.000	28.91	21.52	50.43	74.00	-23.57	peak
6	17945.000	24.22	25.75	49.97	74.00	-24.03	peak




Test Mode:	802.11n HT40	Channel:	5230 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

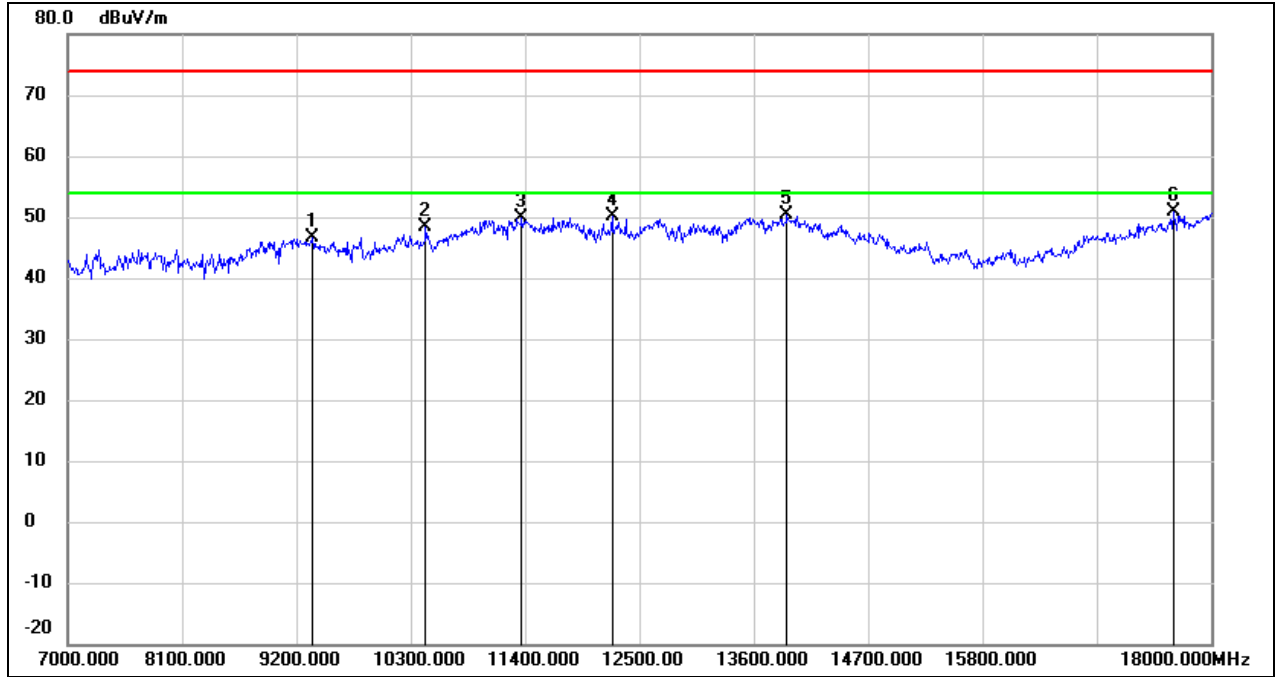

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9354.000	36.09	10.56	46.65	74.00	-27.35	peak
2	10443.000	35.63	12.70	48.33	74.00	-25.67	peak
3	11367.000	33.64	16.22	49.86	74.00	-24.14	peak
4	12236.000	32.40	17.76	50.16	74.00	-23.84	peak
5	13919.000	28.66	21.68	50.34	74.00	-23.66	peak
6	17637.000	27.26	23.64	50.90	74.00	-23.10	peak




Test Mode:	802.11n HT40	Channel:	5755 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

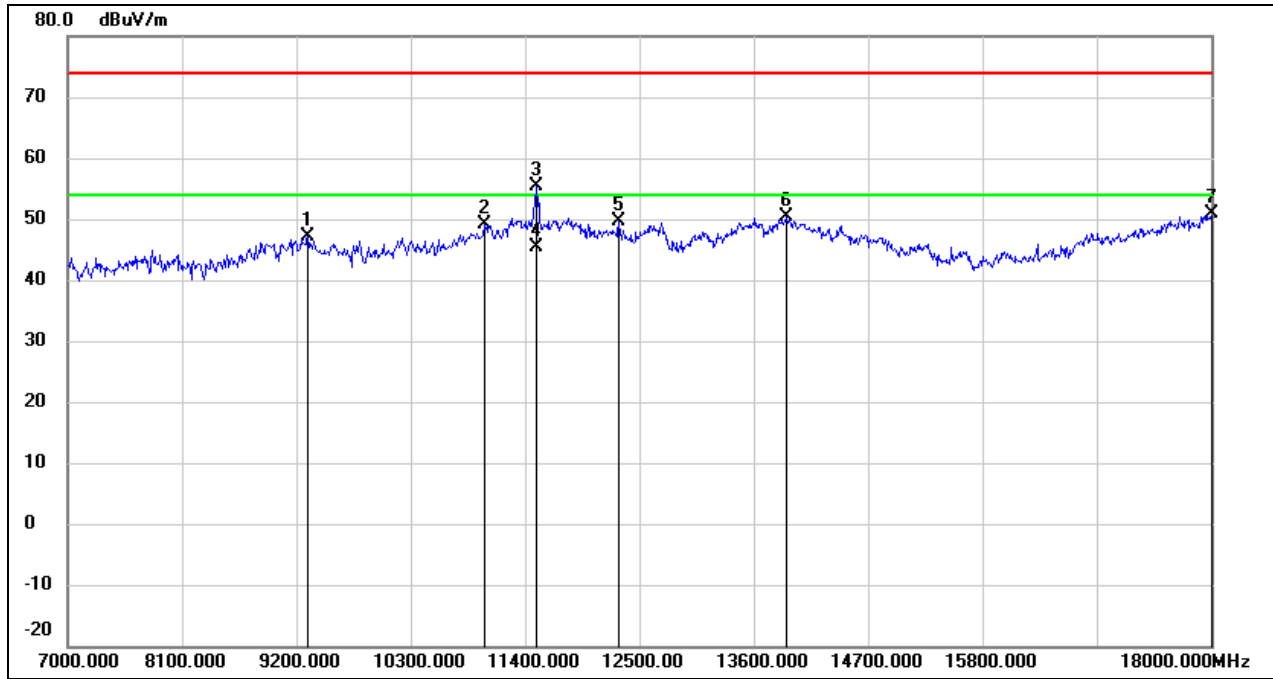

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9310.000	36.68	10.54	47.22	74.00	-26.78	peak
2	11015.000	34.34	14.79	49.13	74.00	-24.87	peak
3	11510.000	38.54	16.79	55.33	74.00	-18.67	peak
4	11510.000	28.59	16.79	45.38	54.00	-8.62	AVG
5	12302.000	31.90	17.78	49.68	74.00	-24.32	peak
6	13908.000	28.64	21.66	50.30	74.00	-23.70	peak
7	18000.000	24.86	26.12	50.98	74.00	-23.02	peak




Test Mode:	802.11n HT40	Channel:	5755 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

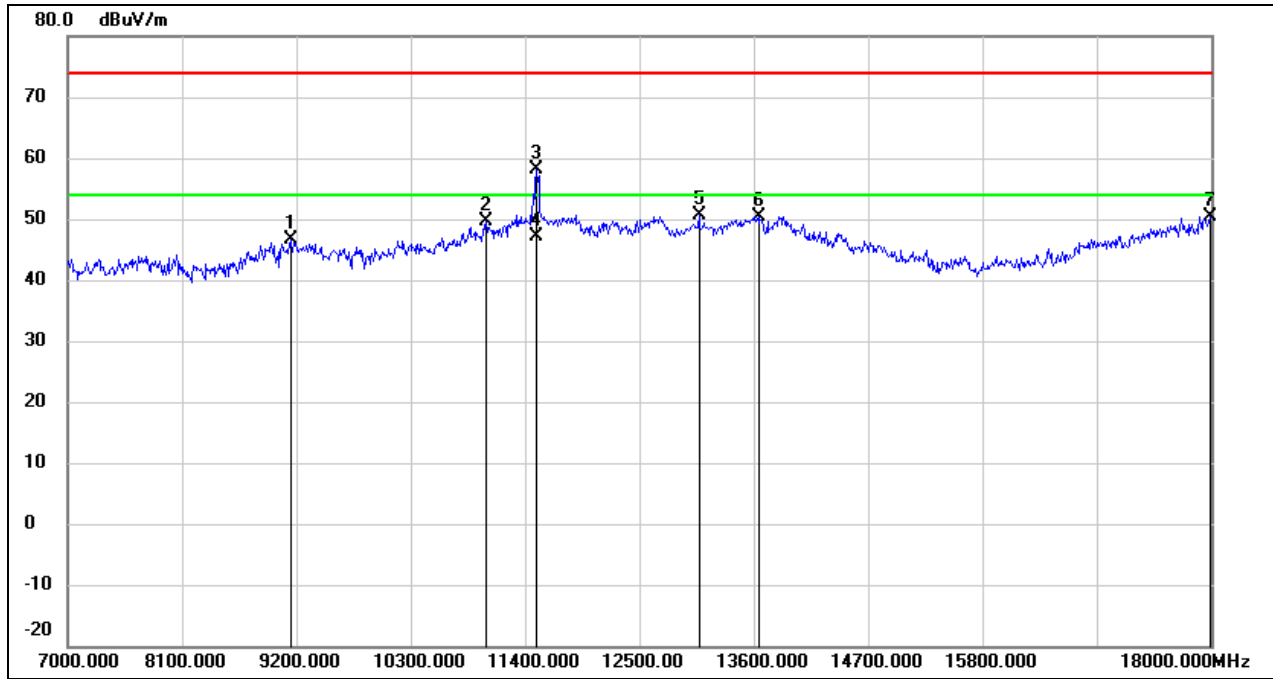

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	36.20	10.43	46.63	74.00	-27.37	peak
2	11026.000	34.73	14.82	49.55	74.00	-24.45	peak
3	11510.000	41.44	16.79	58.23	74.00	-15.77	peak
4	11510.000	30.32	16.79	47.11	54.00	-6.89	AVG
5	13072.000	31.81	18.77	50.58	74.00	-23.42	peak
6	13655.000	29.41	21.03	50.44	74.00	-23.56	peak
7	17989.000	24.36	26.04	50.40	74.00	-23.60	peak




Test Mode:	802.11n HT40	Channel:	5795 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

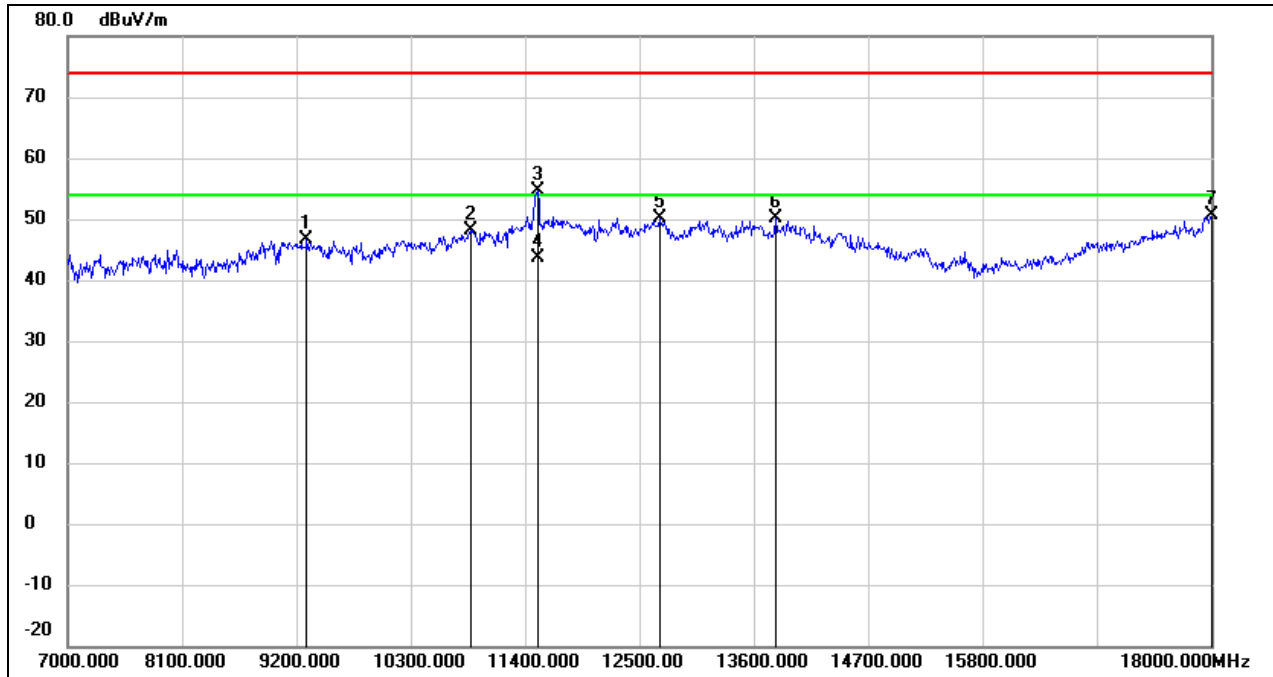

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9299.000	36.19	10.53	46.72	74.00	-27.28	peak
2	10883.000	33.75	14.27	48.02	74.00	-25.98	peak
3	11521.000	37.91	16.82	54.73	74.00	-19.27	peak
4	11521.000	26.89	16.82	43.71	54.00	-10.29	AVG
5	12698.000	31.97	18.08	50.05	74.00	-23.95	peak
6	13809.000	28.65	21.41	50.06	74.00	-23.94	peak
7	18000.000	24.58	26.12	50.70	74.00	-23.30	peak




Test Mode:	802.11n HT40	Channel:	5795 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

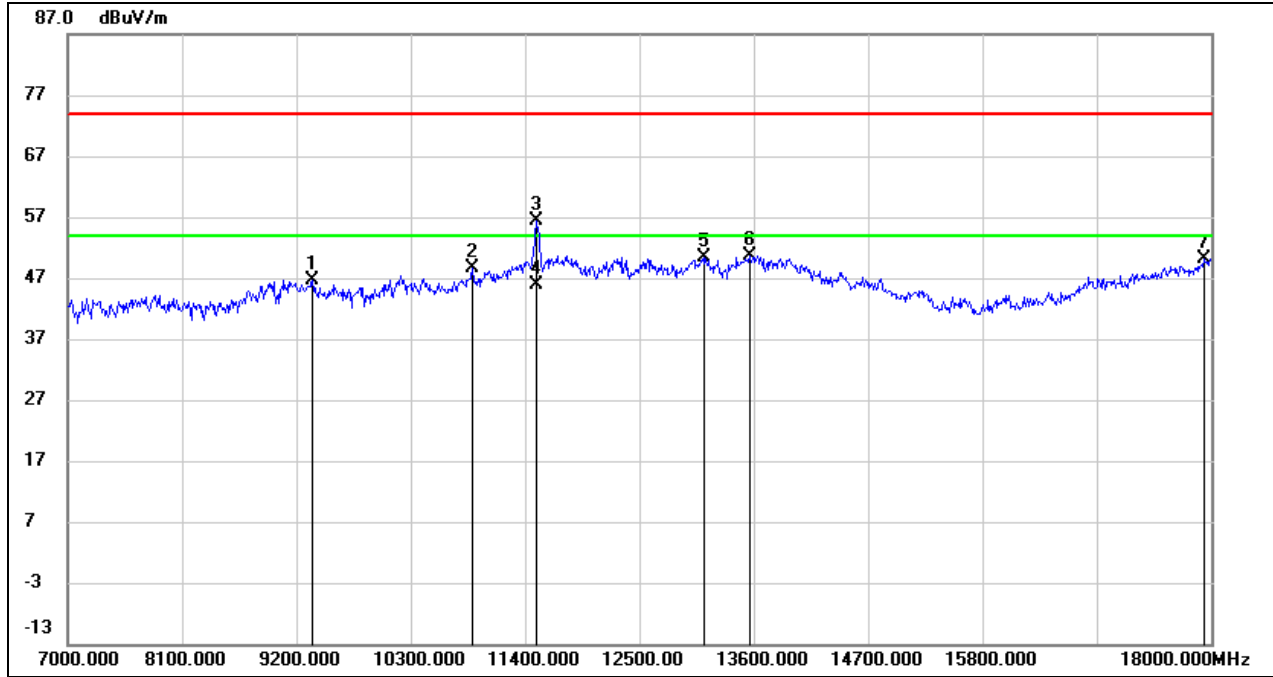

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9354.000	36.01	10.56	46.57	74.00	-27.43	peak
2	10894.000	34.24	14.32	48.56	74.00	-25.44	peak
3	11510.000	39.67	16.79	56.46	74.00	-17.54	peak
4	11510.000	29.12	16.79	45.91	54.00	-8.09	AVG
5	13116.000	31.46	18.96	50.42	74.00	-23.58	peak
6	13556.000	29.87	20.78	50.65	74.00	-23.35	peak
7	17934.000	24.48	25.67	50.15	74.00	-23.85	peak




Test Mode:	802.11ac VHT80	Channel:	5210 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

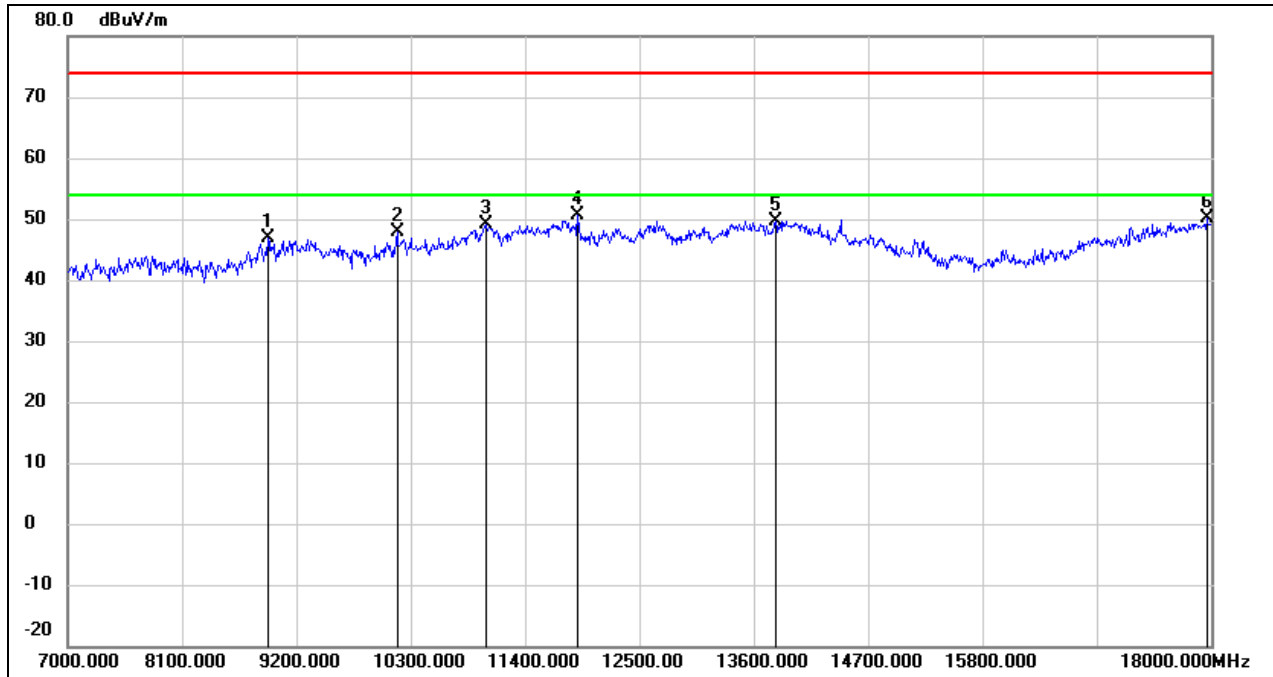

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8925.000	36.94	9.82	46.76	74.00	-27.24	peak
2	10168.000	35.68	12.13	47.81	74.00	-26.19	peak
3	11026.000	34.32	14.82	49.14	74.00	-24.86	peak
4	11906.000	33.03	17.52	50.55	74.00	-23.45	peak
5	13809.000	28.20	21.41	49.61	74.00	-24.39	peak
6	17956.000	24.40	25.82	50.22	74.00	-23.78	peak




Test Mode:	802.11ac VHT80	Channel:	5210 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

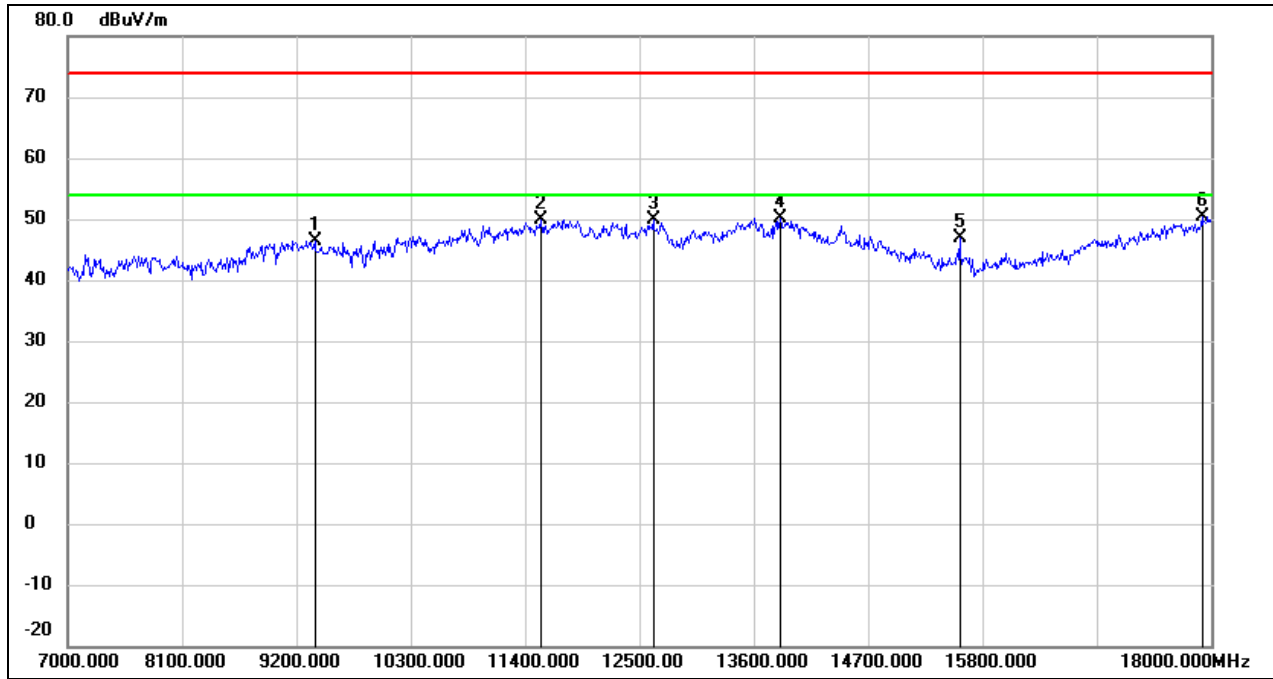

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9376.000	35.80	10.58	46.38	74.00	-27.62	peak
2	11554.000	32.98	16.87	49.85	74.00	-24.15	peak
3	12632.000	31.79	17.99	49.78	74.00	-24.22	peak
4	13853.000	28.54	21.52	50.06	74.00	-23.94	peak
5	15580.000	30.08	16.75	46.83	74.00	-27.17	peak
6	17912.000	24.90	25.52	50.42	74.00	-23.58	peak




Test Mode:	802.11ac VHT80	Channel:	5775 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

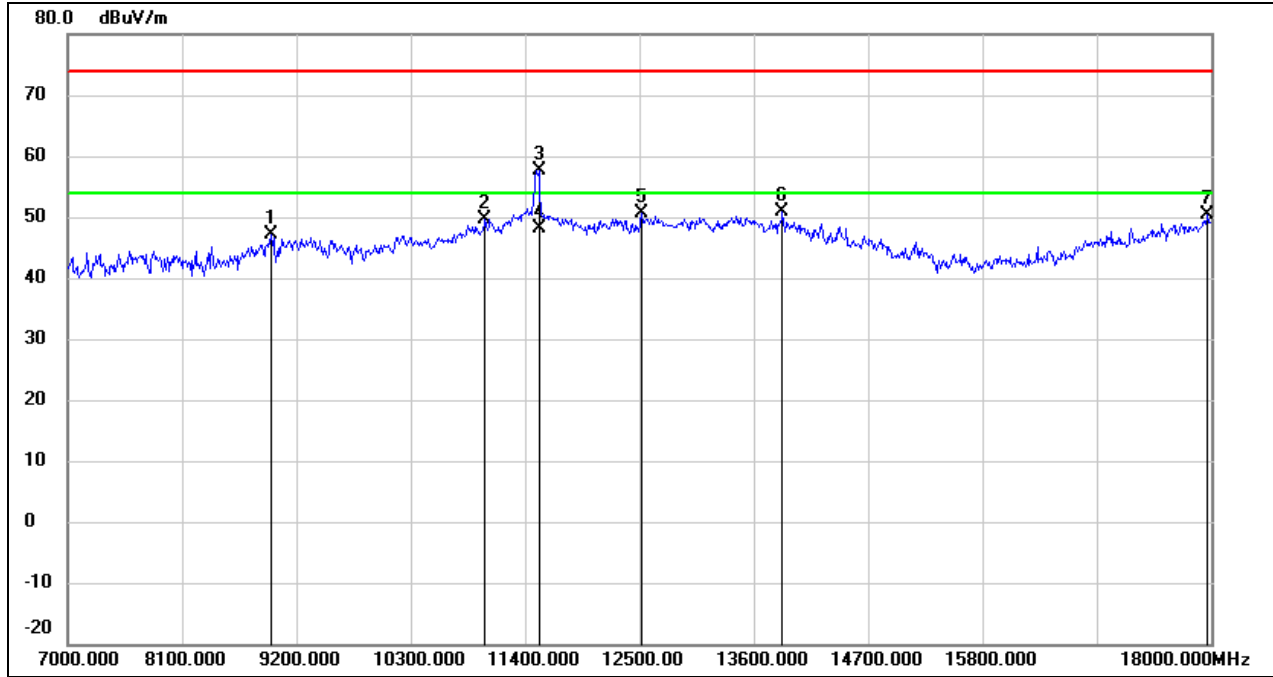

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8958.000	37.11	10.05	47.16	74.00	-26.84	peak
2	11015.000	34.74	14.79	49.53	74.00	-24.47	peak
3	11532.000	40.91	16.83	57.74	74.00	-16.26	peak
4	11532.000	31.19	16.83	48.02	54.00	-5.98	AVG
5	12522.000	32.70	17.86	50.56	74.00	-23.44	peak
6	13875.000	29.30	21.57	50.87	74.00	-23.13	peak
7	17967.000	24.52	25.89	50.41	74.00	-23.59	peak



Test Mode:	802.11ac VHT80	Channel:	5775 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

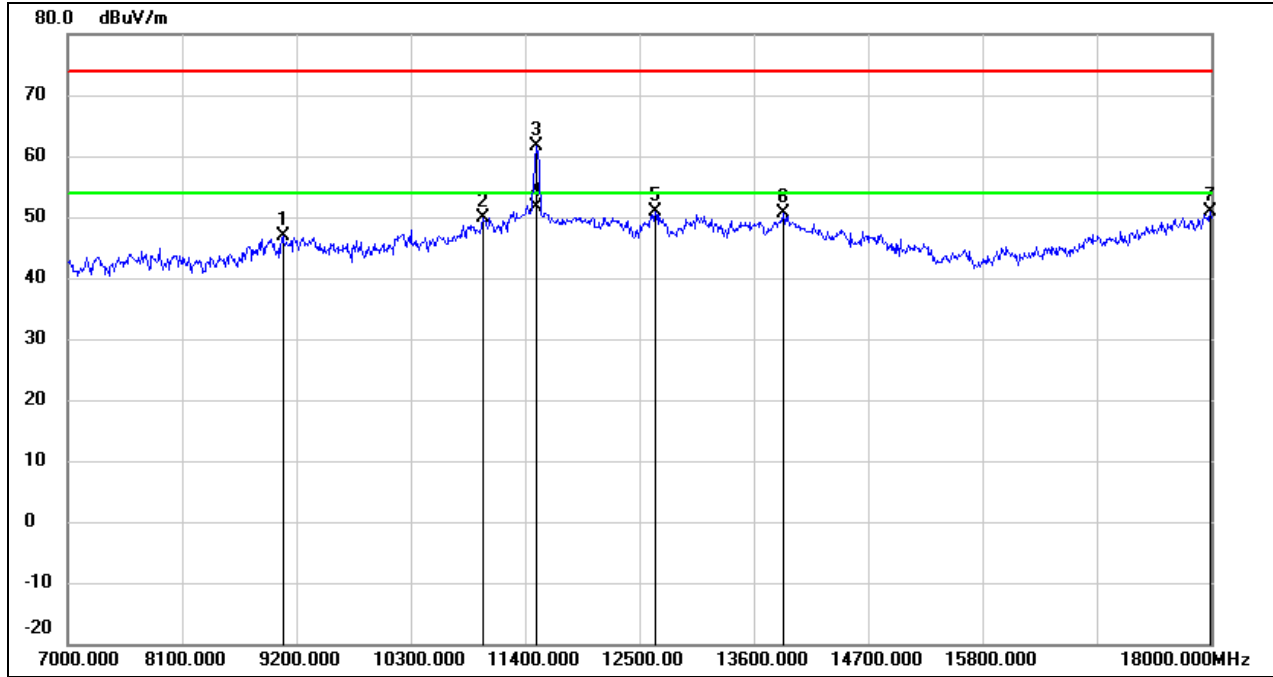


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9068.000	36.43	10.39	46.82	74.00	-27.18	peak
2	10993.000	35.28	14.70	49.98	74.00	-24.02	peak
3	11510.000	44.88	16.79	61.67	74.00	-12.33	peak
4	11510.000	34.73	16.79	51.52	54.00	-2.48	AVG
5	12654.000	32.78	18.01	50.79	74.00	-23.21	peak
6	13886.000	29.06	21.60	50.66	74.00	-23.34	peak
7	17989.000	24.92	26.04	50.96	74.00	-23.04	peak



8.4. SPURIOUS EMISSIONS (9 KHZ ~ 30 MHZ)


Test Mode:	802.11n HT40	Channel:	5230 MHz
Polarity:	Loop Antenna Face On To The EUT	Test Voltage	DC 12 V

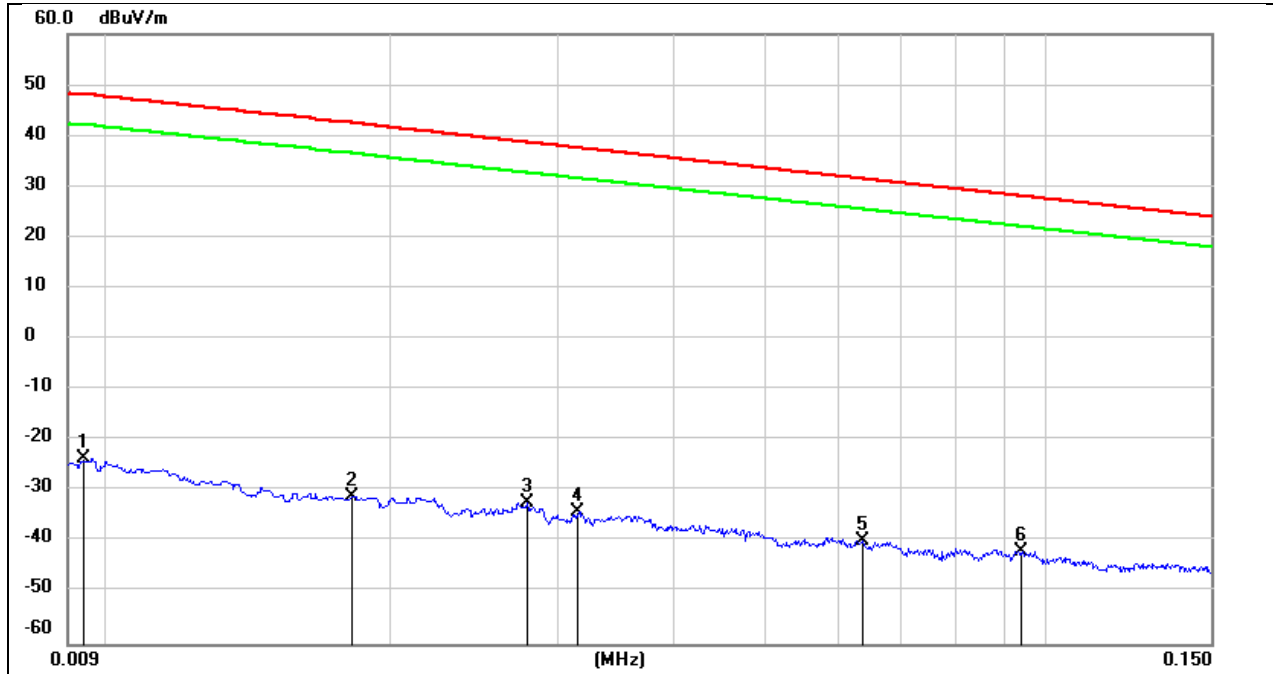

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0094	77.66	-101.35	-23.69	48.05	-71.74	peak
2	0.0181	70.35	-101.36	-31.01	42.45	-73.46	peak
3	0.0279	69.17	-101.38	-32.21	38.69	-70.90	peak
4	0.0316	67.24	-101.40	-34.16	37.61	-71.77	peak
5	0.0636	61.81	-101.54	-39.73	31.53	-71.26	peak
6	0.0942	59.92	-101.75	-41.83	28.12	-69.95	peak




Test Mode:	802.11n HT40	Channel:	5230 MHz
Polarity:	Loop Antenna Face On To The EUT	Test Voltage	DC 12 V

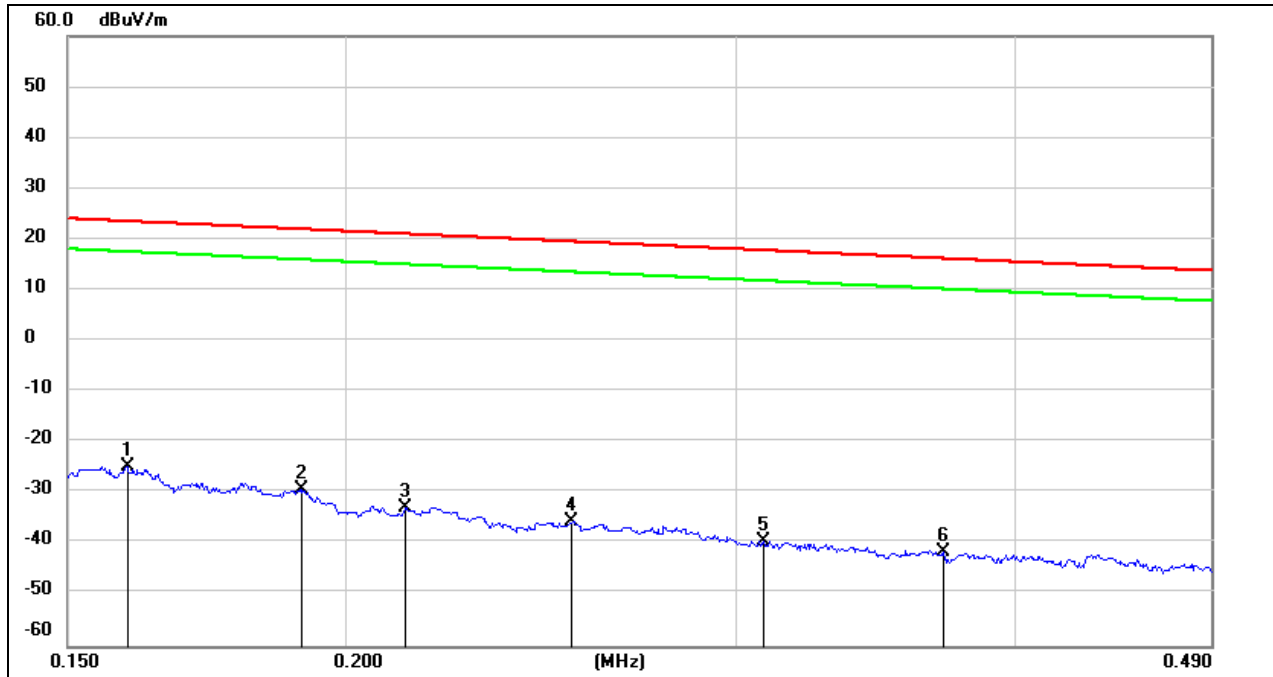

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1595	76.86	-101.65	-24.79	23.55	-48.34	peak
2	0.1912	72.47	-101.70	-29.23	21.97	-51.20	peak
3	0.2127	68.95	-101.74	-32.79	21.04	-53.83	peak
4	0.2530	66.14	-101.80	-35.66	19.54	-55.20	peak
5	0.3084	62.45	-101.86	-39.41	17.82	-57.23	peak
6	0.3714	60.28	-101.93	-41.65	16.20	-57.85	peak



Test Mode:	802.11n HT40	Channel:	5230 MHz
Polarity:	Loop Antenna Face On To The EUT	Test Voltage	DC 12 V

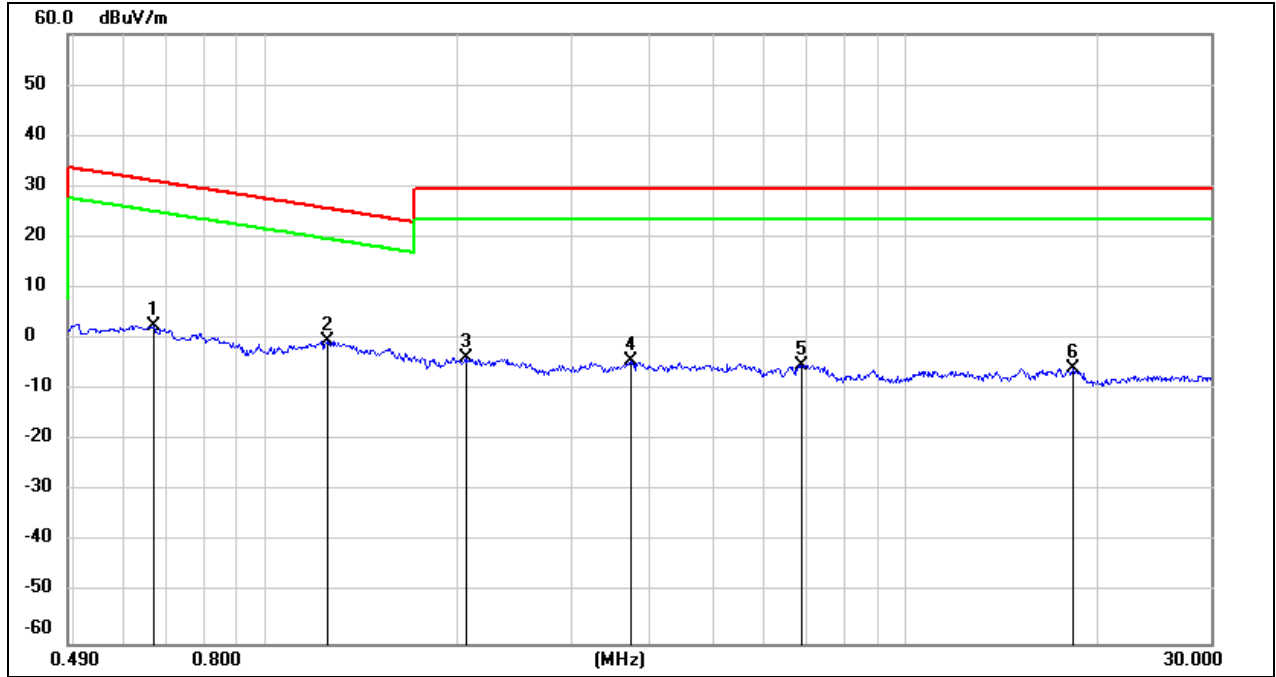


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.6671	64.75	-62.10	2.65	31.12	-28.47	peak
2	1.2459	61.75	-62.16	-0.41	25.70	-26.11	peak
3	2.0539	58.20	-61.81	-3.61	29.54	-33.15	peak
4	3.7100	57.20	-61.41	-4.21	29.54	-33.75	peak
5	6.8936	56.09	-61.22	-5.13	29.54	-34.67	peak
6	18.2545	54.93	-60.90	-5.97	29.54	-35.51	peak



8.5. SPURIOUS EMISSIONS (18 GHZ ~ 26 GHZ)


Test Mode:	802.11n HT40	Channel:	5230 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

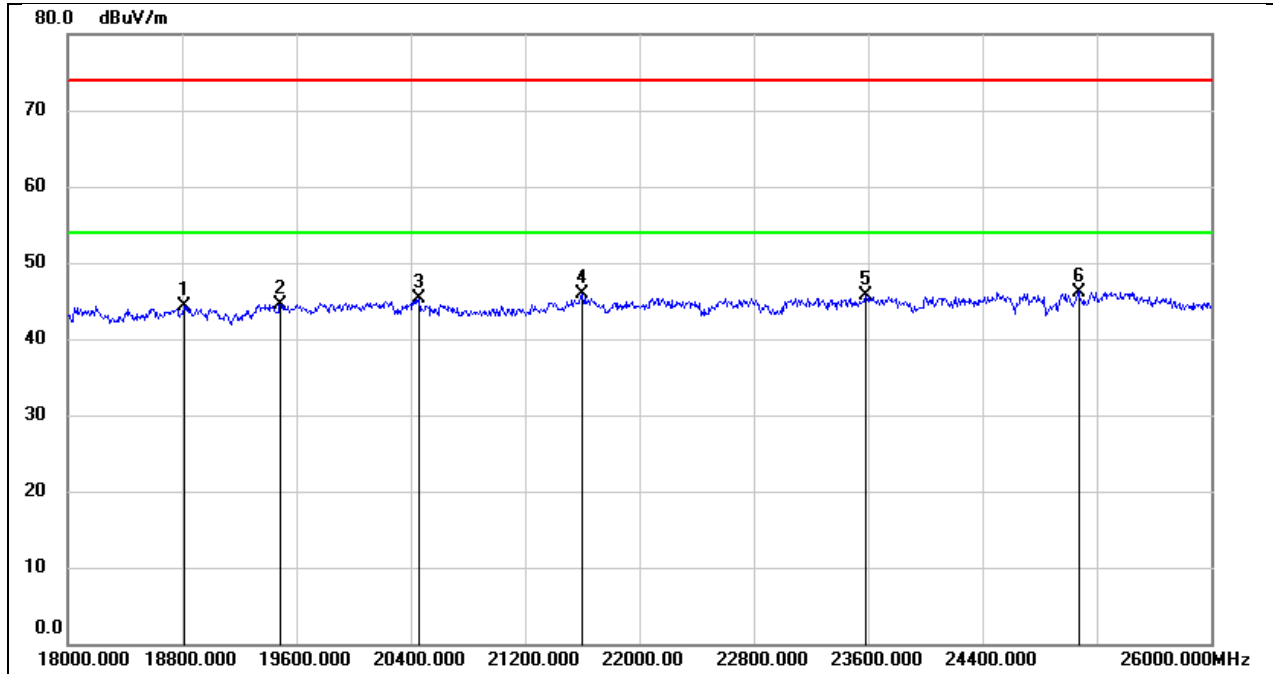

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18816.000	49.71	-5.38	44.33	74.00	-29.67	peak
2	19488.000	50.05	-5.56	44.49	74.00	-29.51	peak
3	20456.000	50.63	-5.39	45.24	74.00	-28.76	peak
4	21600.000	50.52	-4.54	45.98	74.00	-28.02	peak
5	23584.000	48.92	-3.15	45.77	74.00	-28.23	peak
6	25072.000	48.17	-1.97	46.20	74.00	-27.80	peak



Test Mode:	802.11n HT40	Channel:	5230 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

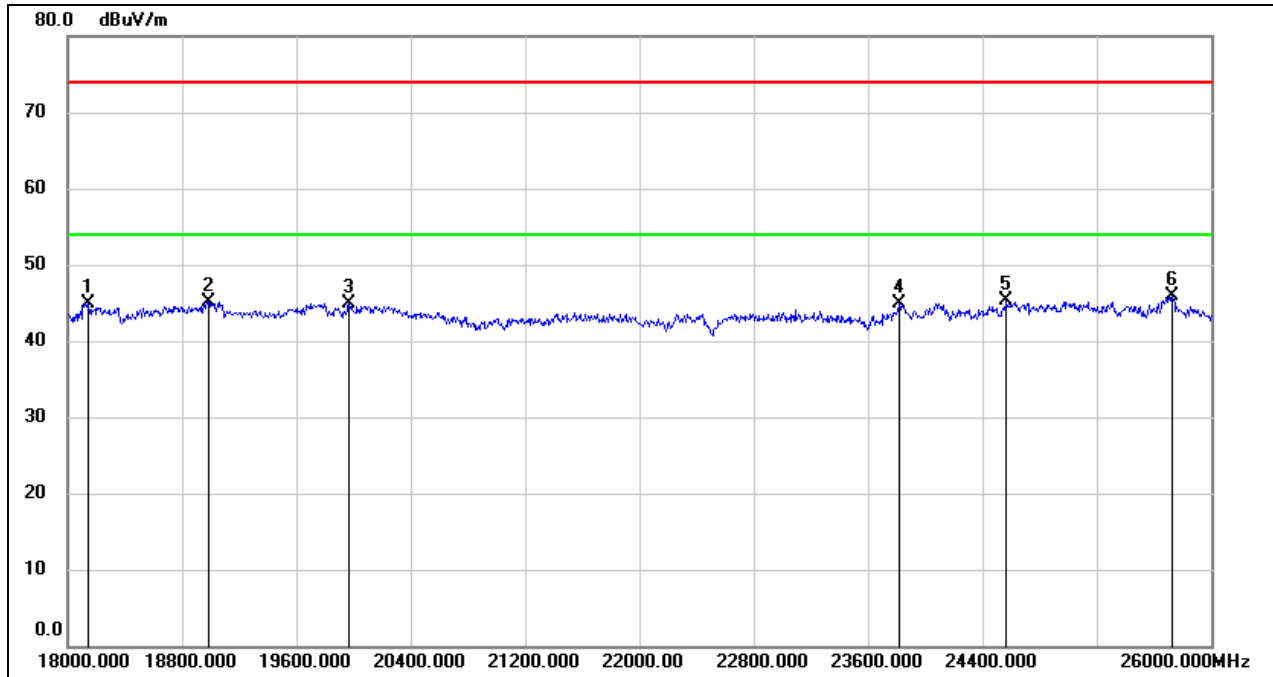


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18144.000	50.38	-5.48	44.90	74.00	-29.10	peak
2	18984.000	50.29	-5.23	45.06	74.00	-28.94	peak
3	19968.000	50.36	-5.42	44.94	74.00	-29.06	peak
4	23816.000	47.95	-3.08	44.87	74.00	-29.13	peak
5	24568.000	47.60	-2.33	45.27	74.00	-28.73	peak
6	25728.000	46.61	-0.72	45.89	74.00	-28.11	peak



8.6. SPURIOUS EMISSIONS (26 GHZ ~ 40 GHZ)


Test Mode:	802.11n HT40	Channel:	5230 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

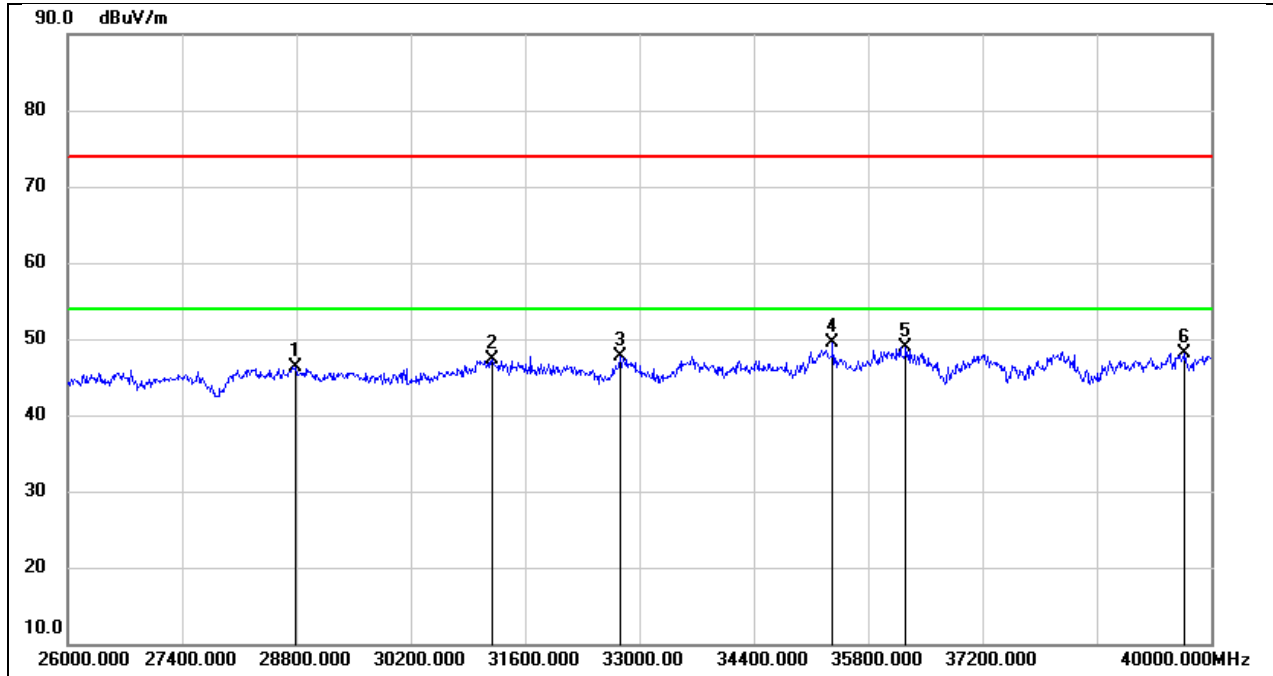

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	28786.000	46.99	-0.64	46.35	74.00	-27.65	peak
2	31194.000	48.04	-0.80	47.24	74.00	-26.76	peak
3	32762.000	48.95	-1.21	47.74	74.00	-26.26	peak
4	35366.000	46.90	2.59	49.49	74.00	-24.51	peak
5	36262.000	45.60	3.28	48.88	74.00	-25.12	peak
6	39678.000	43.27	4.87	48.14	74.00	-25.86	peak



Test Mode:	802.11n HT40	Channel:	5230 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

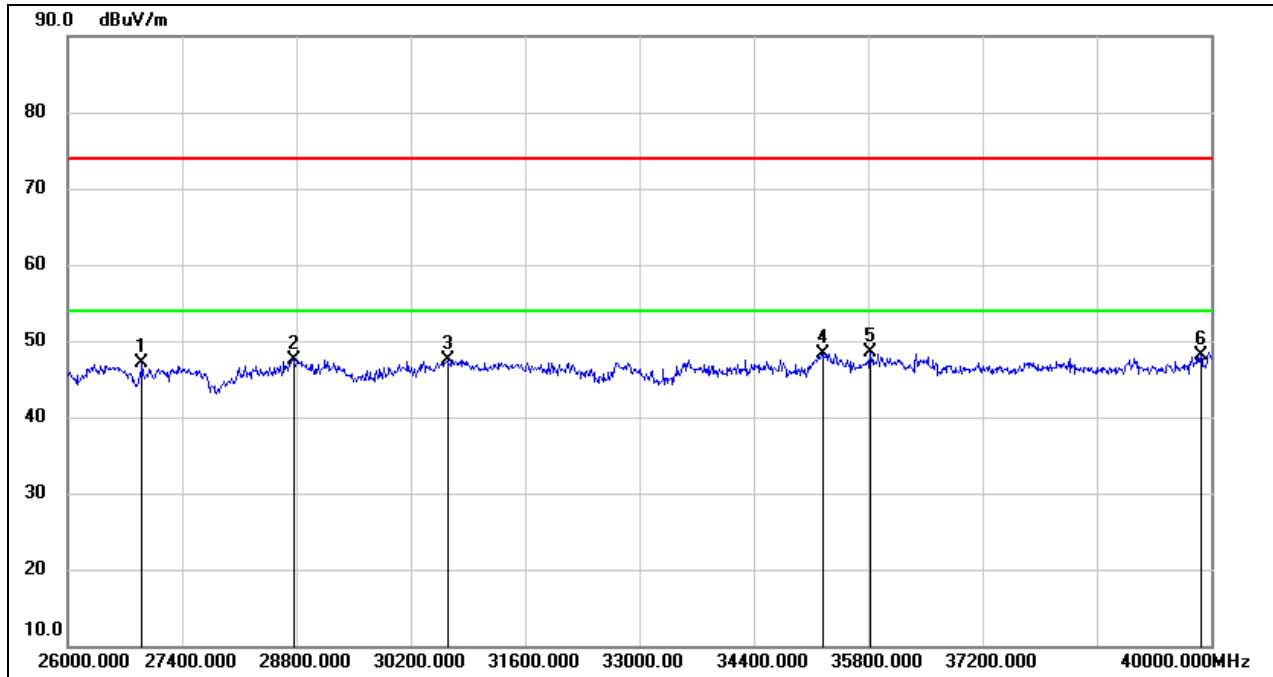


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26910.000	51.14	-4.11	47.03	74.00	-26.97	peak
2	28772.000	48.16	-0.59	47.57	74.00	-26.43	peak
3	30648.000	48.65	-1.07	47.58	74.00	-26.42	peak
4	35254.000	45.62	2.65	48.27	74.00	-25.73	peak
5	35828.000	44.75	3.67	48.42	74.00	-25.58	peak
6	39874.000	43.15	4.98	48.13	74.00	-25.87	peak



8.7. SPURIOUS EMISSIONS (30 MHZ ~ 1 GHZ)


Test Mode:	802.11n HT40	Channel:	5230 MHz
Polarity:	Horizontal	Test Voltage:	DC 12 V

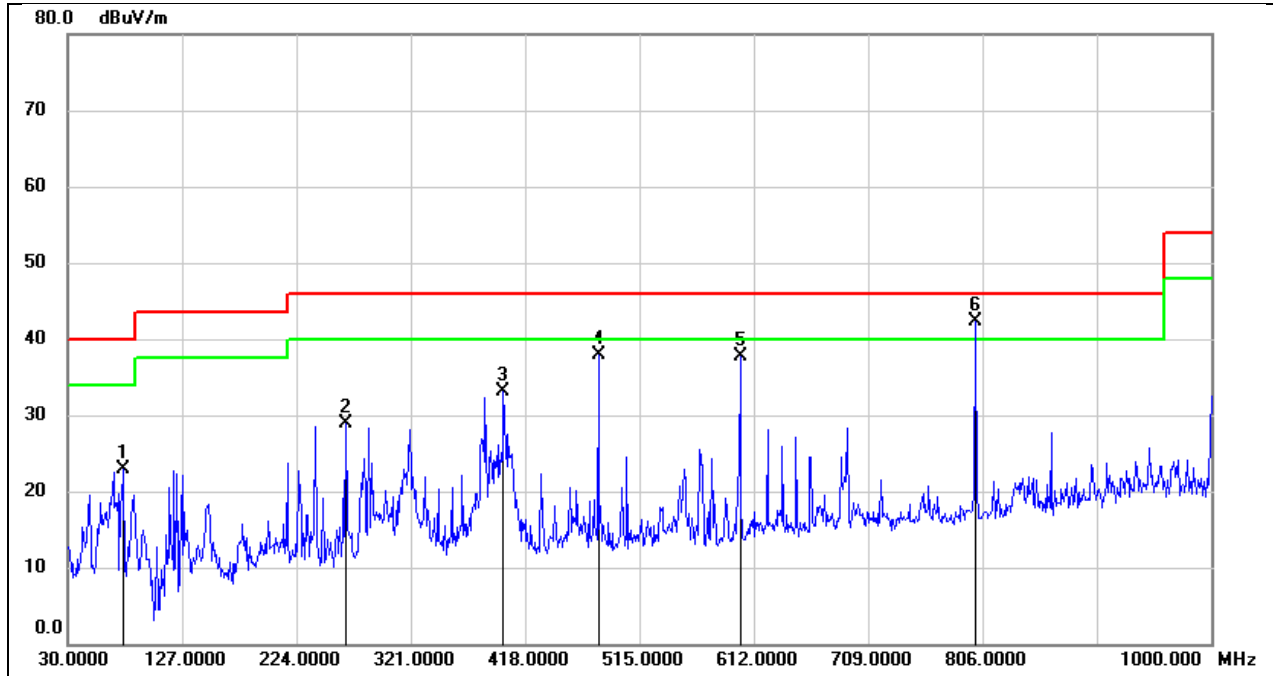

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	76.5600	44.01	-21.07	22.94	40.00	-17.06	QP
2	265.7100	46.97	-18.09	28.88	46.00	-17.12	QP
3	399.5700	46.50	-13.37	33.13	46.00	-12.87	QP
4	480.0800	49.67	-11.79	37.88	46.00	-8.12	QP
5	600.3600	47.27	-9.54	37.73	46.00	-8.27	QP
6	800.1800	49.67	-7.33	42.34	46.00	-3.66	QP



Test Mode:	802.11n HT40	Channel:	5230 MHz
Polarity:	Vertical	Test Voltage:	DC 12 V

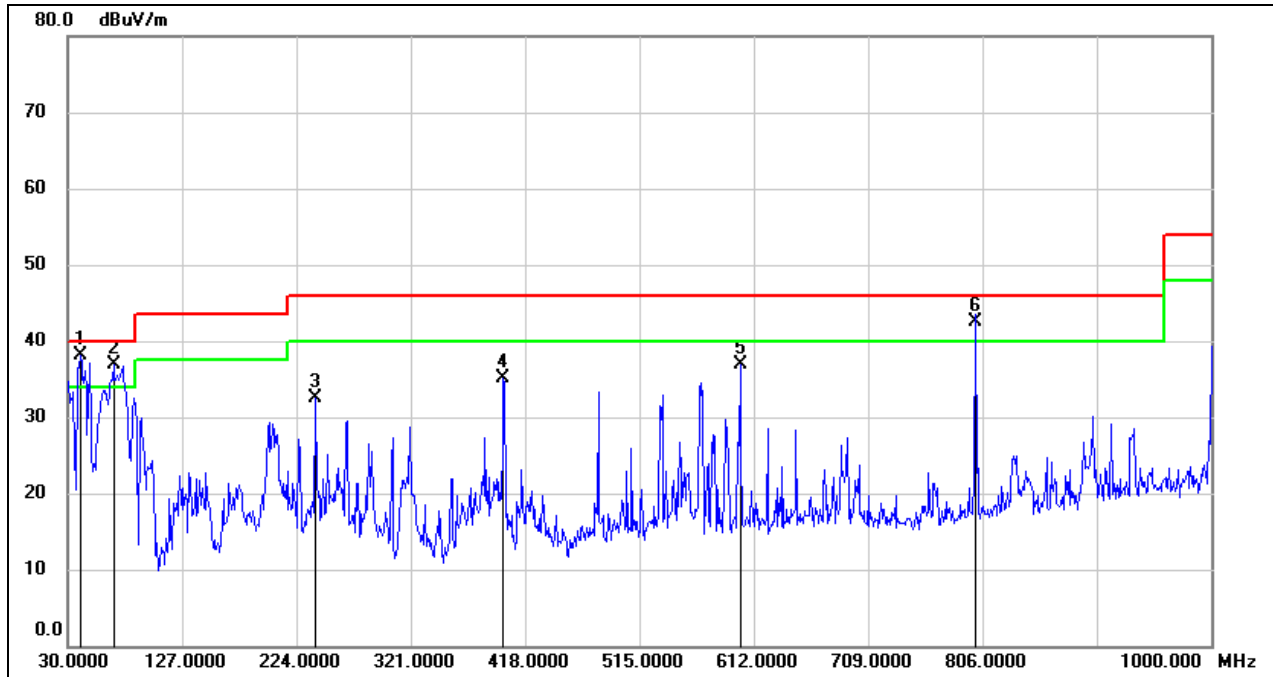

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	40.6699	58.21	-20.05	38.16	40.00	-1.84	QP
2	68.8000	57.43	-20.56	36.87	40.00	-3.13	QP
3	239.5200	51.70	-19.16	32.54	46.00	-13.46	QP
4	399.5700	48.39	-13.37	35.02	46.00	-10.98	QP
5	600.3600	46.50	-9.54	36.96	46.00	-9.04	QP
6	800.1800	49.91	-7.33	42.58	46.00	-3.42	QP



9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass



10. TEST DATA


10.1. APPENDIX A: EMISSION BANDWIDTH


10.1.1. Test Result

Test Mode	Antenna	Channel	26db EBW [MHz]	FL[MHz]	FH[MHz]	Verdict
11A	Ant1	5180	20.84	5169.48	5190.32	PASS
		5200	21.56	5189.48	5211.04	PASS
		5240	21.80	5229.44	5251.24	PASS
		5745	20.96	5734.40	5755.36	PASS
		5785	20.92	5774.36	5795.28	PASS
		5825	21.16	5814.48	5835.64	PASS
11N20SISO	Ant1	5180	21.76	5169.12	5190.88	PASS
		5200	21.48	5189.20	5210.68	PASS
		5240	21.48	5229.12	5250.60	PASS
		5745	21.84	5733.96	5755.80	PASS
		5785	21.56	5774.00	5795.56	PASS
		5825	21.48	5814.24	5835.72	PASS
11N40SISO	Ant1	5190	40.40	5169.76	5210.16	PASS
		5230	40.72	5209.52	5250.24	PASS
		5755	40.56	5734.60	5775.16	PASS
		5795	40.80	5774.36	5815.16	PASS
11AC80SISO	Ant1	5210	82.40	5168.56	5250.96	PASS
		5775	82.40	5733.40	5815.80	PASS




10.1.2. Test Graphs

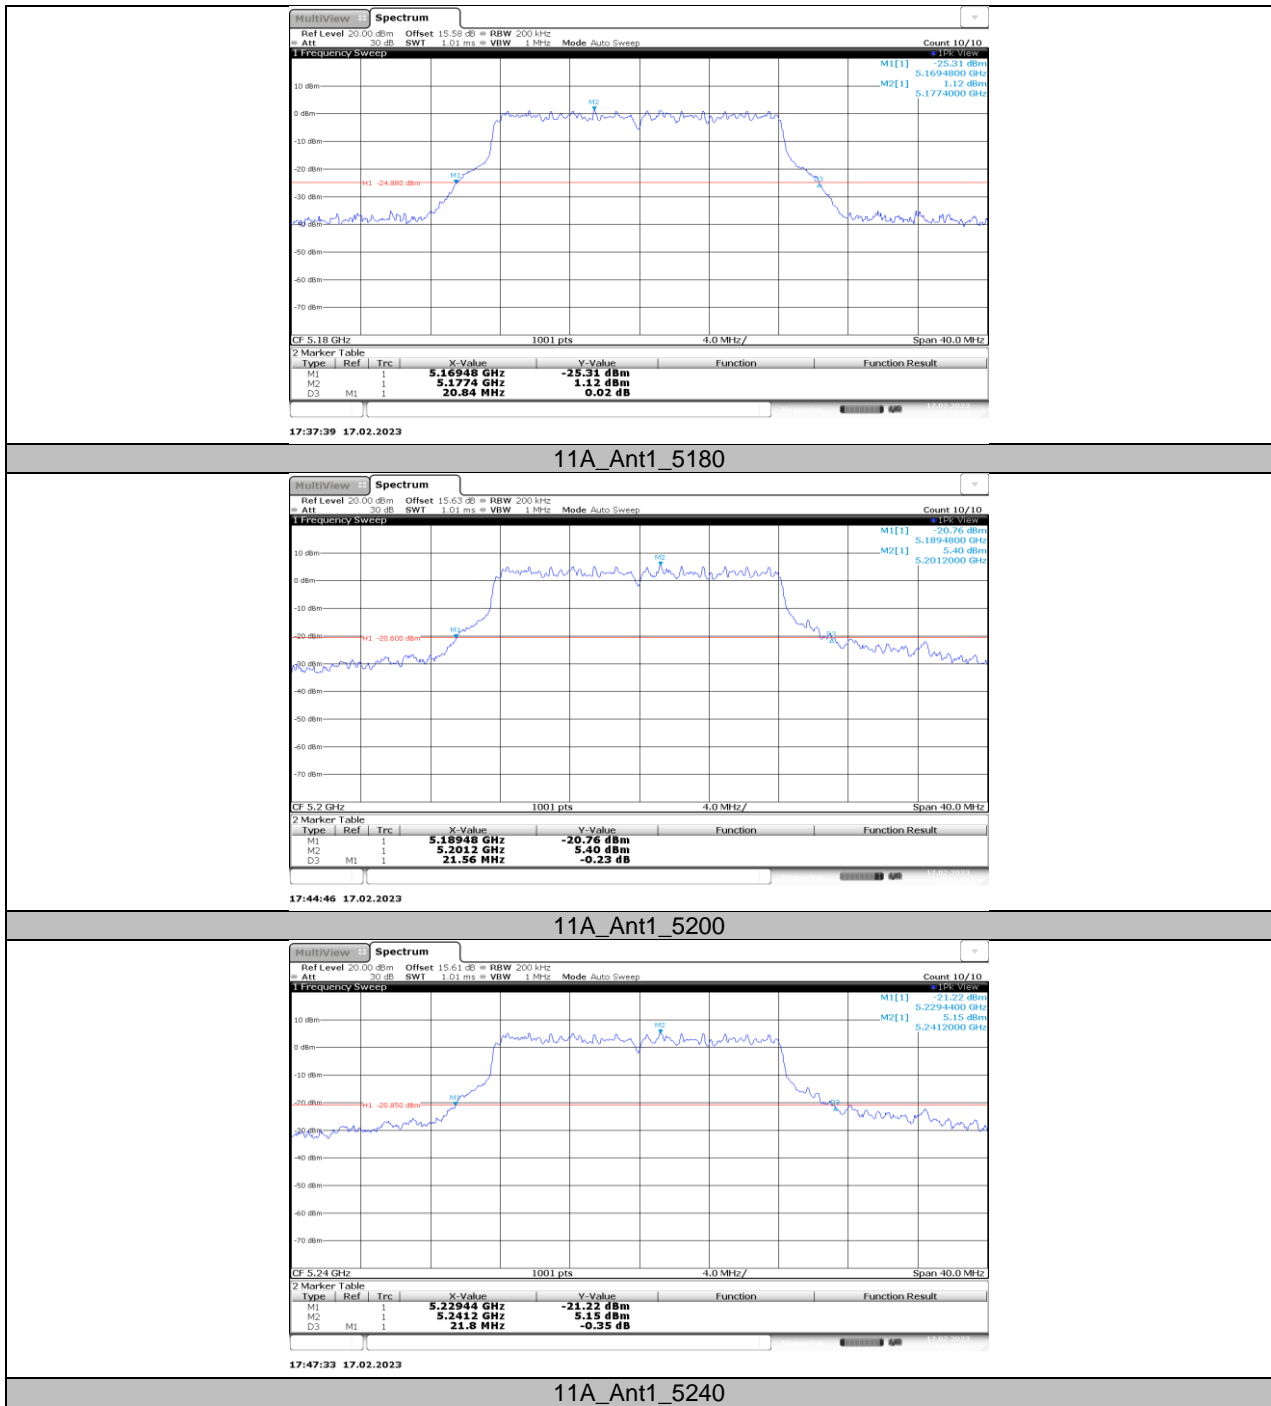


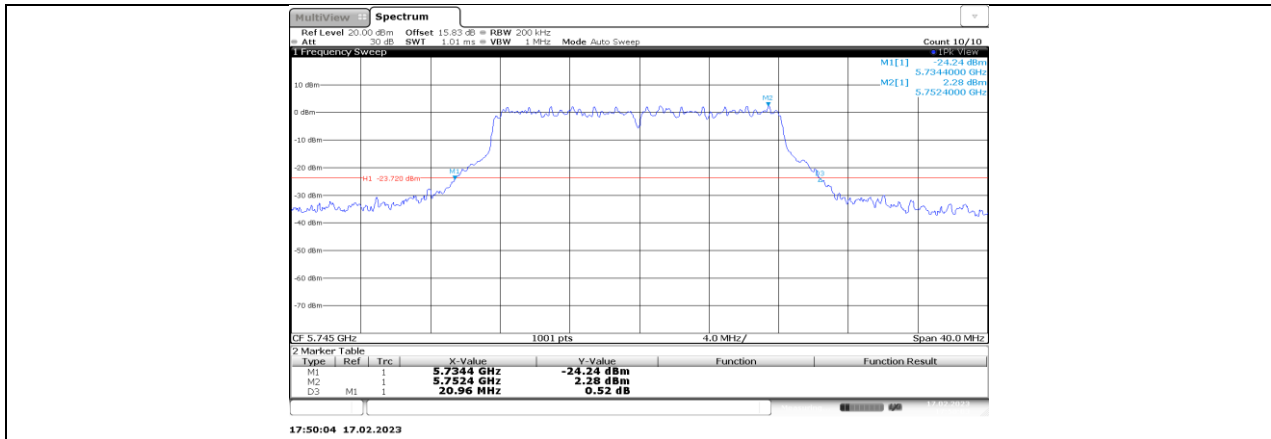


11A_Ant1_5745

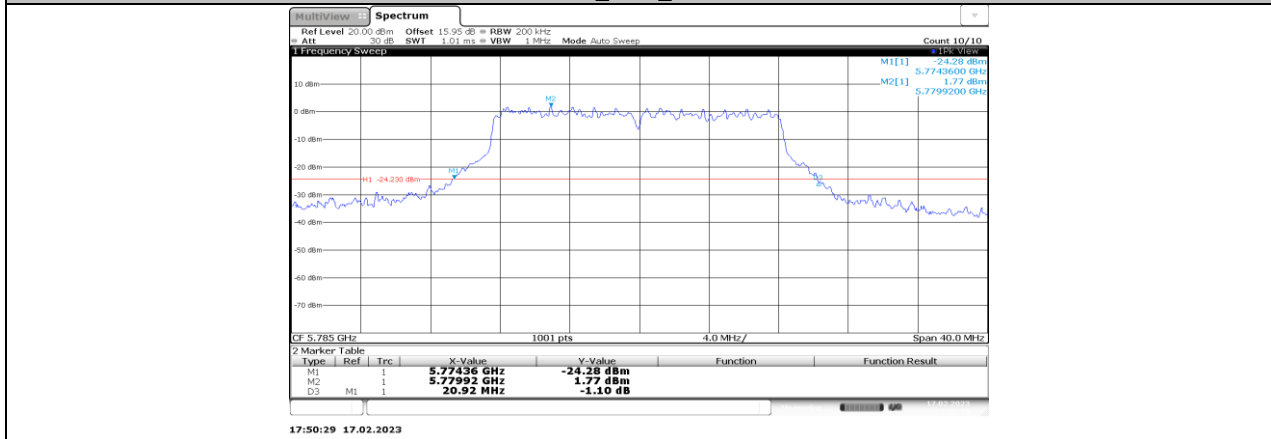


11A_Ant1_5785

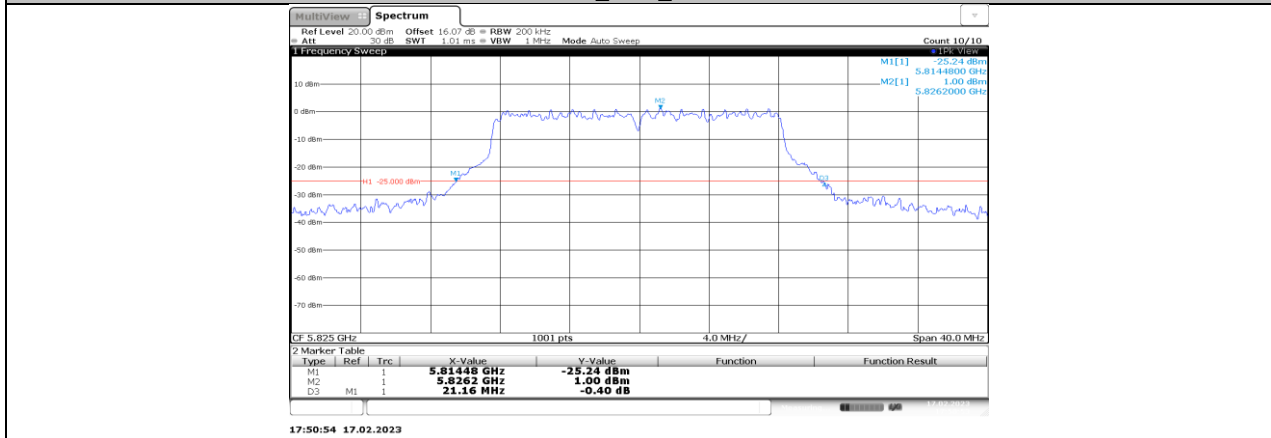


11A_Ant1_5825

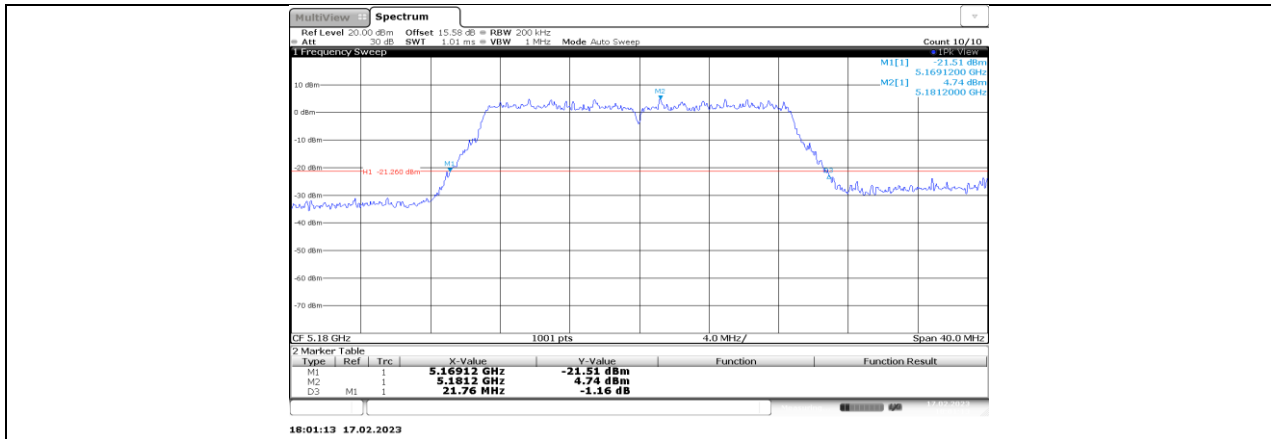


11N20SISO_Ant1_5180

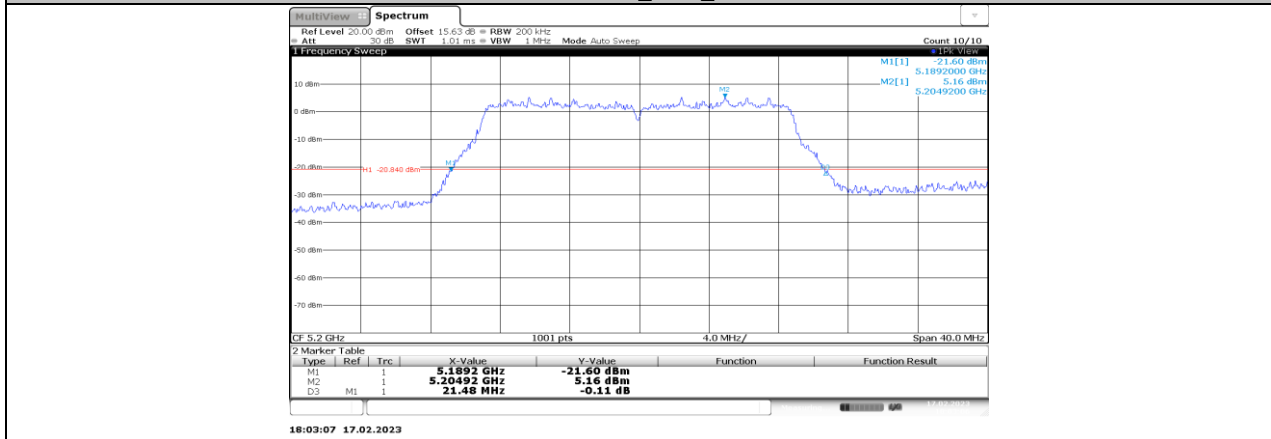


11N20SISO_Ant1_5200

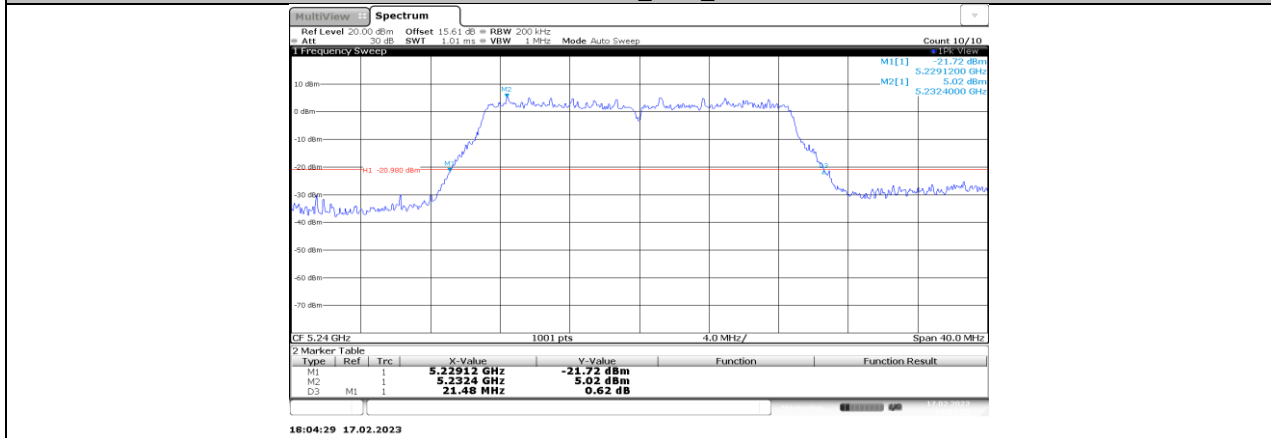


11N20SISO_Ant1_5240

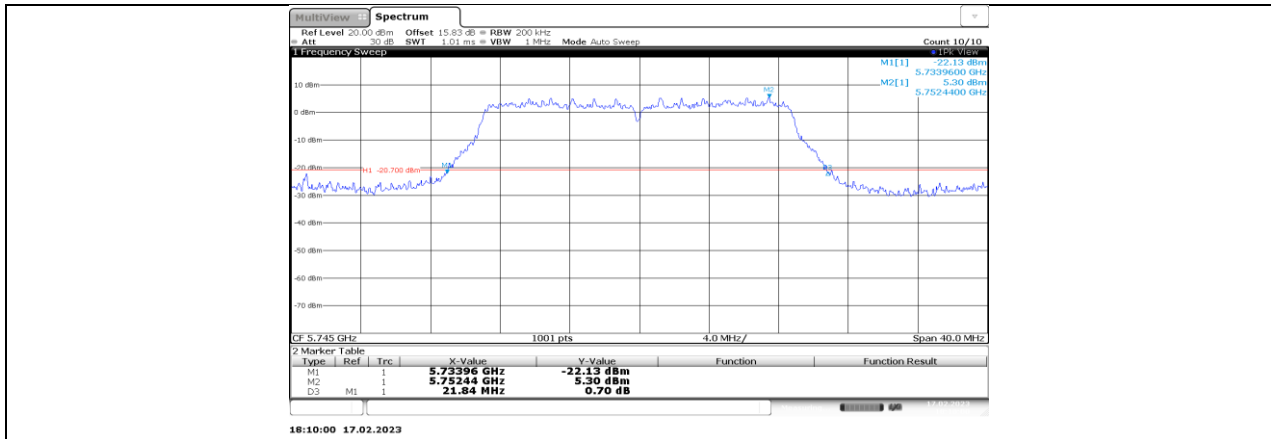




11N20SISO_Ant1_5745

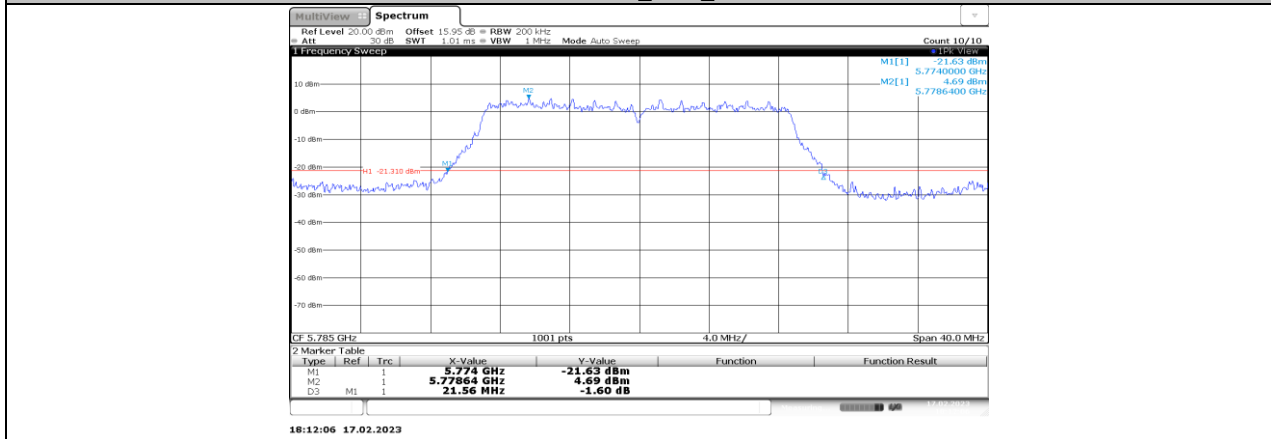




11N20SISO_Ant1_5785

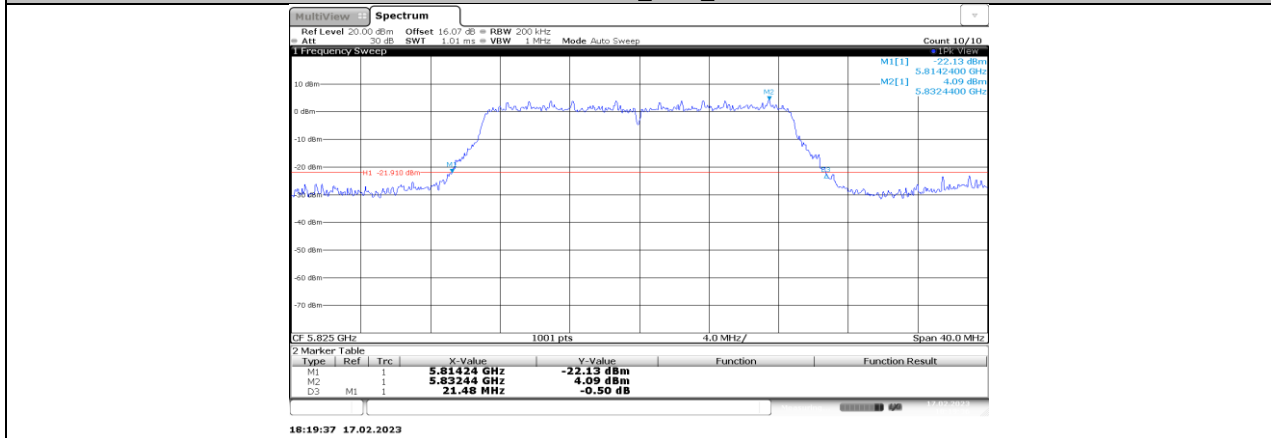

11N20SISO_Ant1_5825

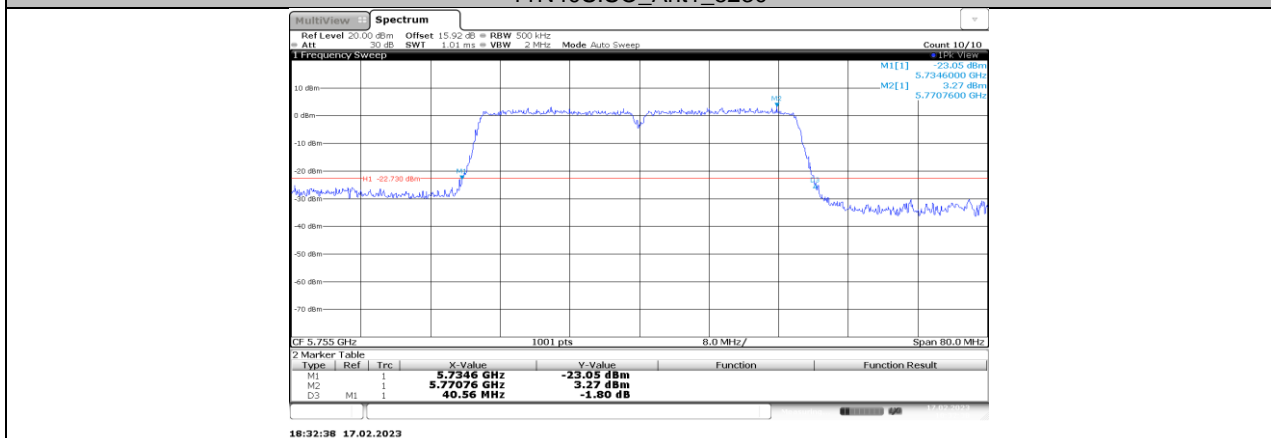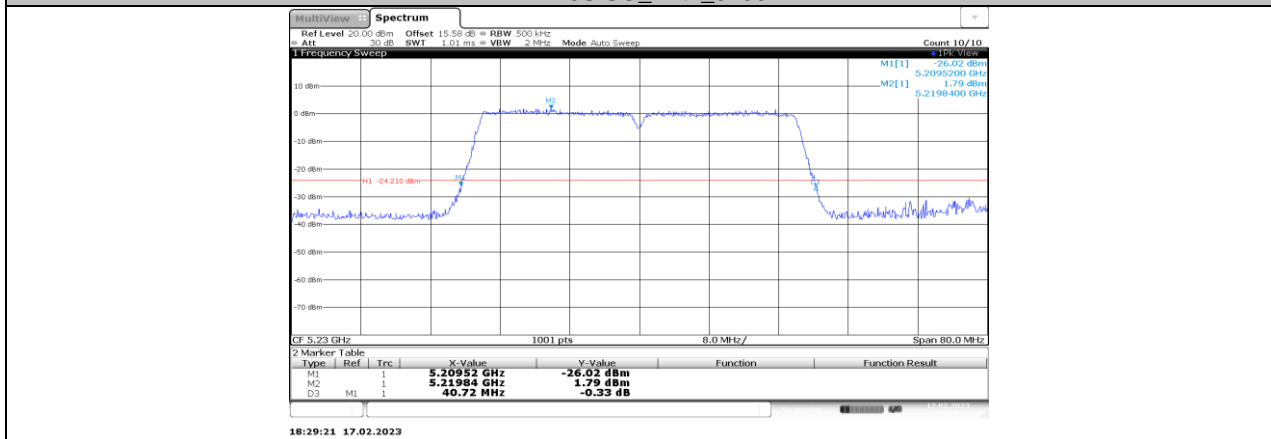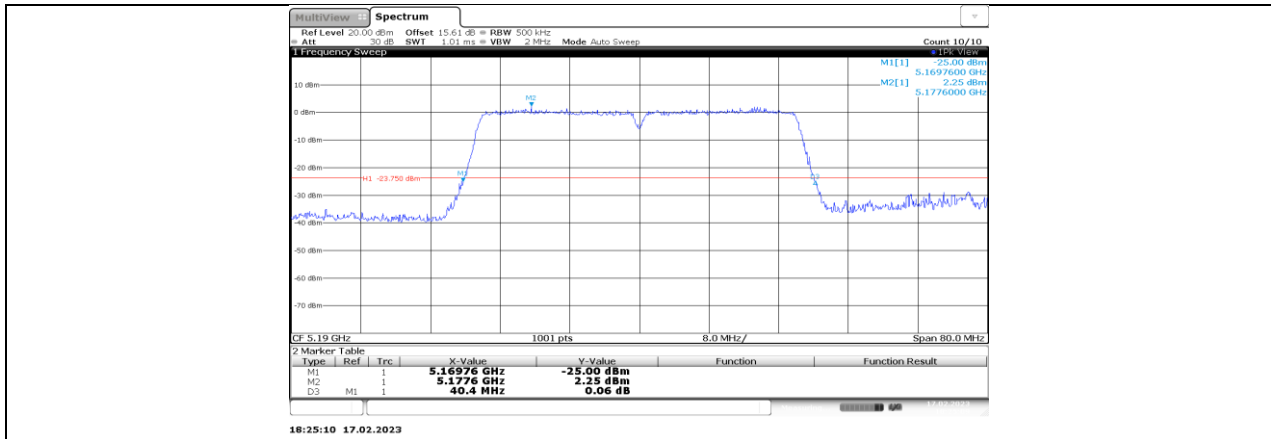

11N40SISO_Ant1_5755

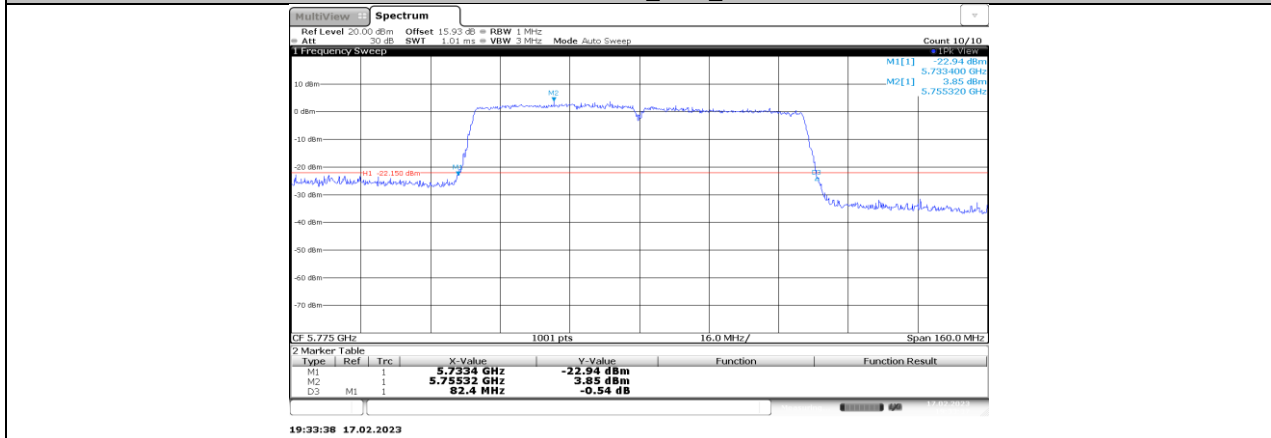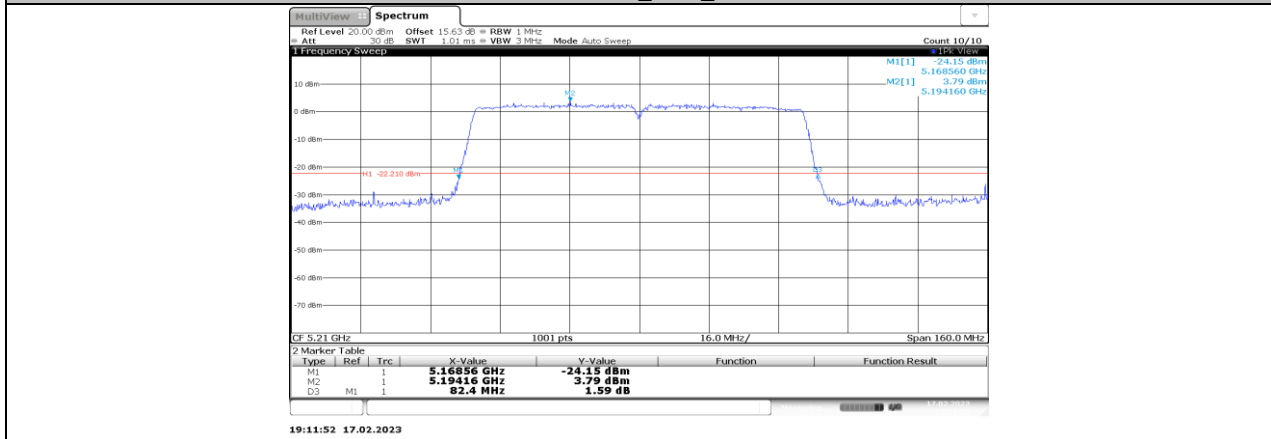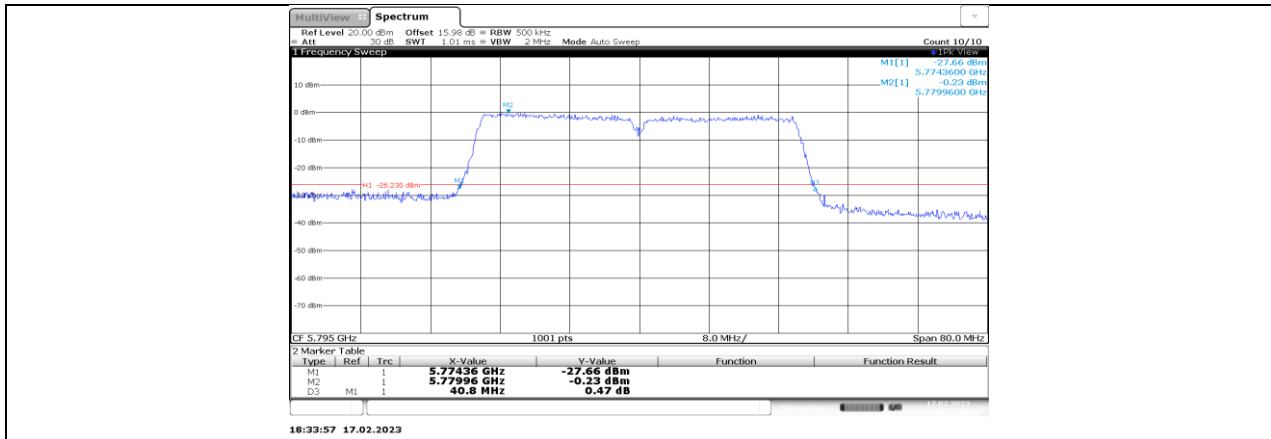




10.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH


10.2.1. Test Result

Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11A	Ant1	5180	17.098	5171.4107	5188.5084	PASS
		5200	17.315	5191.3265	5208.6417	PASS
		5240	17.363	5231.2493	5248.6124	PASS
		5745	17.218	5736.3660	5753.5841	PASS
		5785	17.255	5776.2216	5793.4764	PASS
		5825	17.206	5816.3814	5833.5873	PASS
11N20SISO	Ant1	5180	18.831	5170.5080	5189.3387	PASS
		5200	18.814	5190.5308	5209.3444	PASS
		5240	18.858	5230.4667	5249.3245	PASS
		5745	18.976	5735.4165	5754.3930	PASS
		5785	19.01	5775.2911	5794.3011	PASS
		5825	18.984	5815.4677	5834.4520	PASS
11N40SISO	Ant1	5190	37.159	5171.4662	5208.6252	PASS
		5230	36.835	5211.4115	5248.2468	PASS
		5755	36.826	5736.4273	5773.2532	PASS
		5795	37.008	5776.2635	5813.2710	PASS
11AC80SISO	Ant1	5210	76.314	5171.6699	5247.9842	PASS
		5775	76.306	5736.4774	5812.7832	PASS




10.2.2. Test Graphs

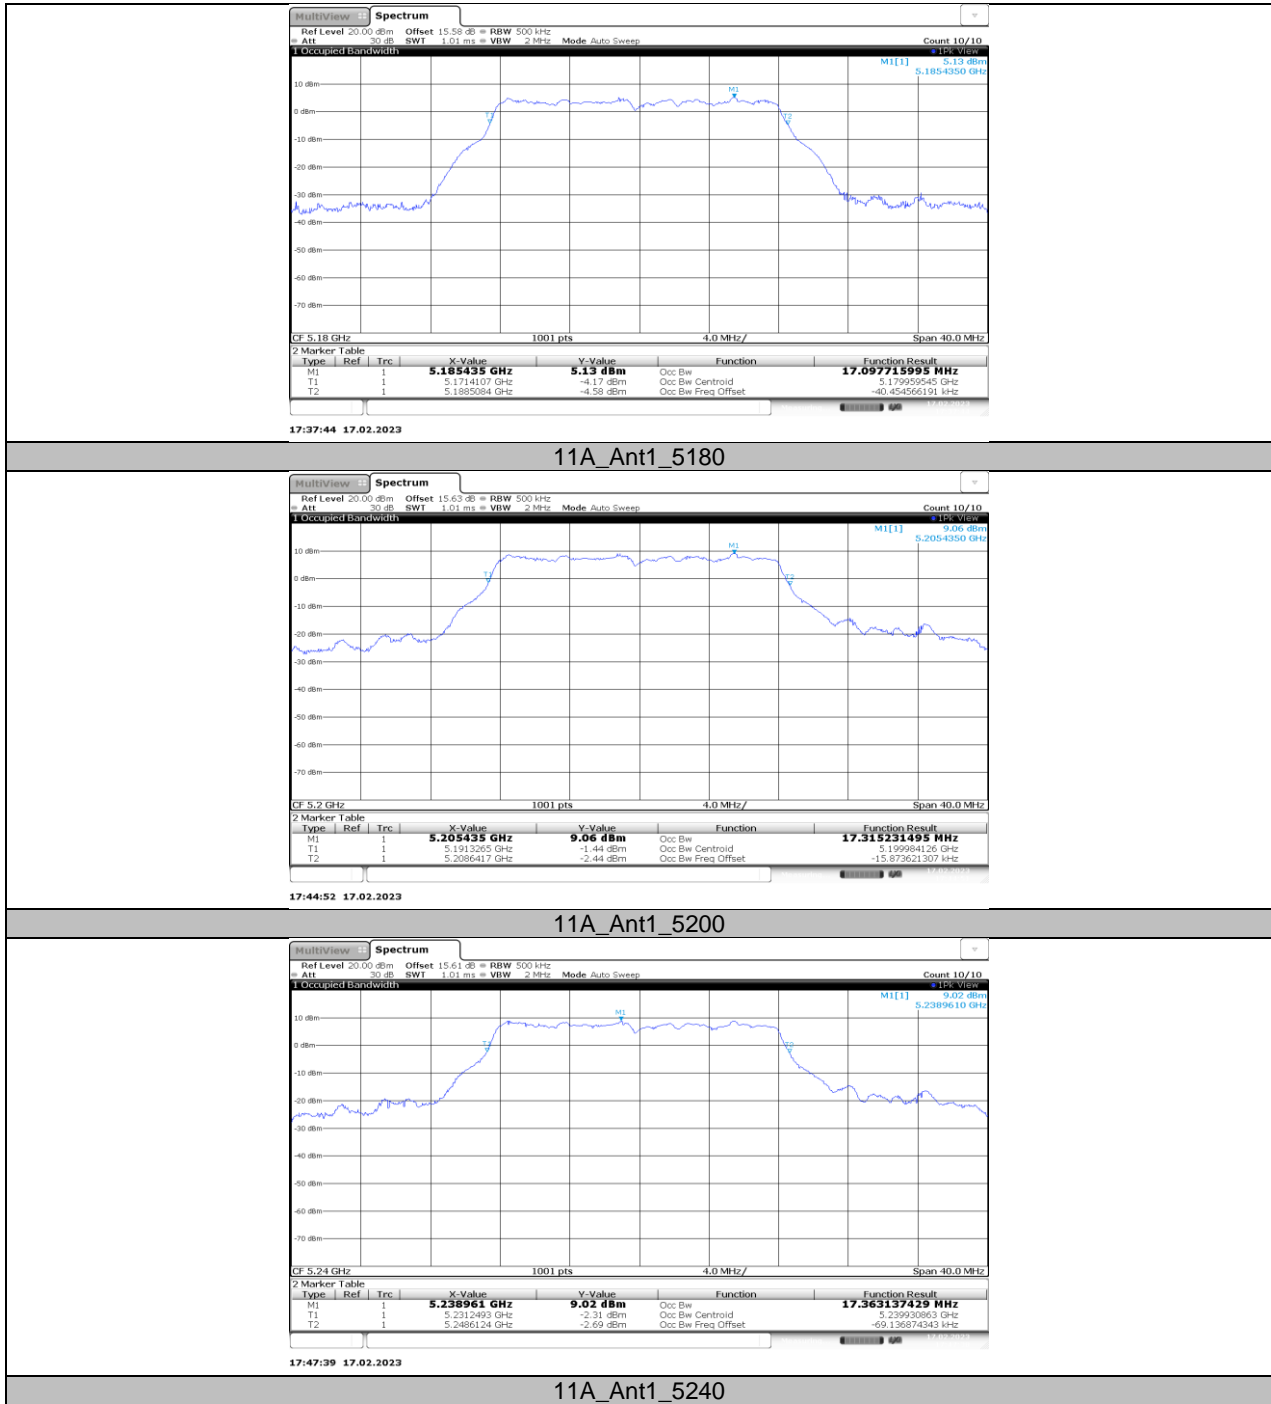


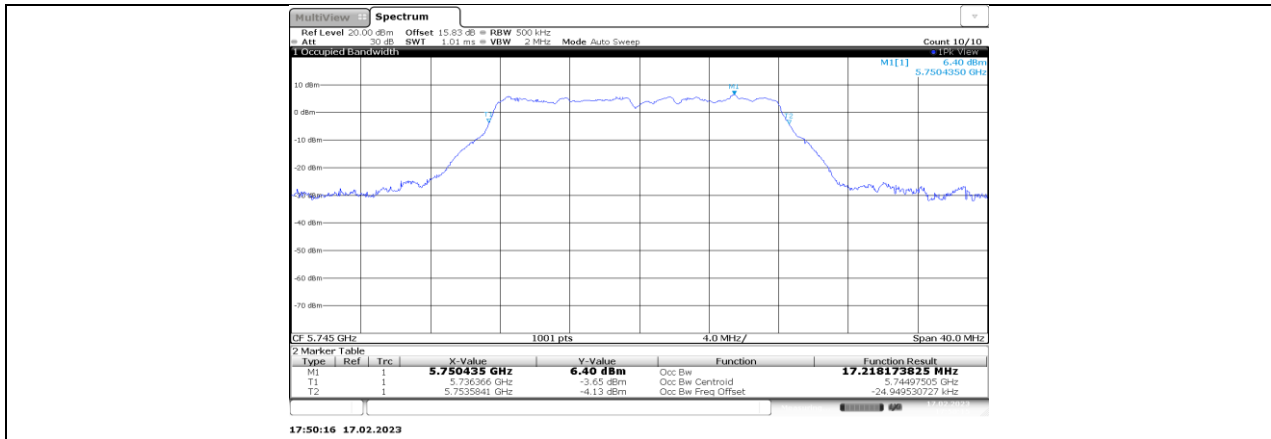


11A_Ant1_5745

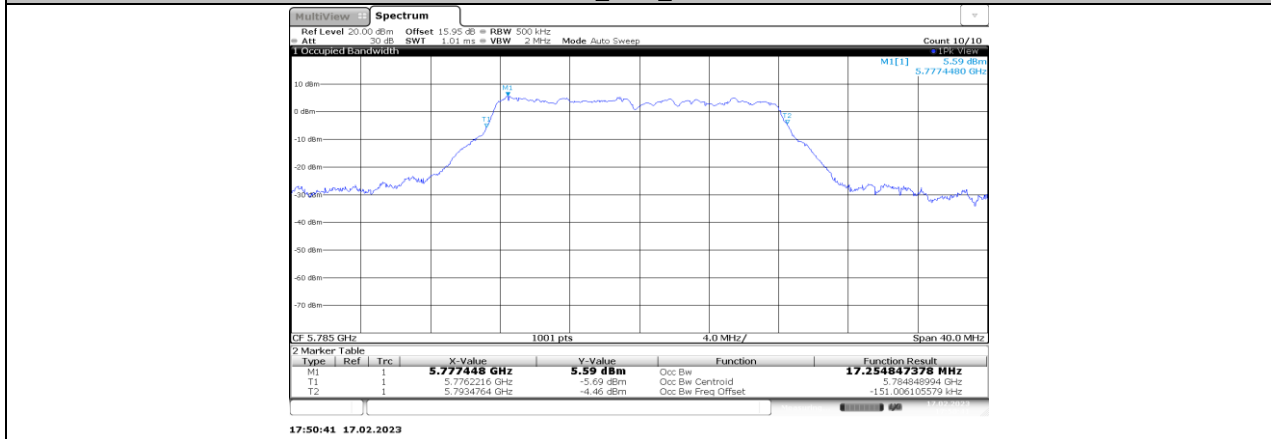


11A_Ant1_5785

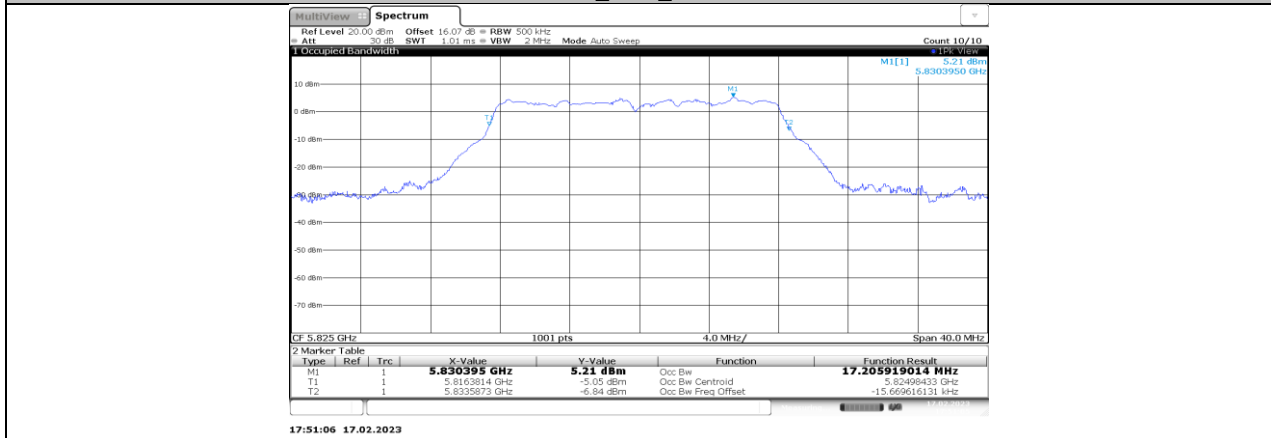


11A_Ant1_5825

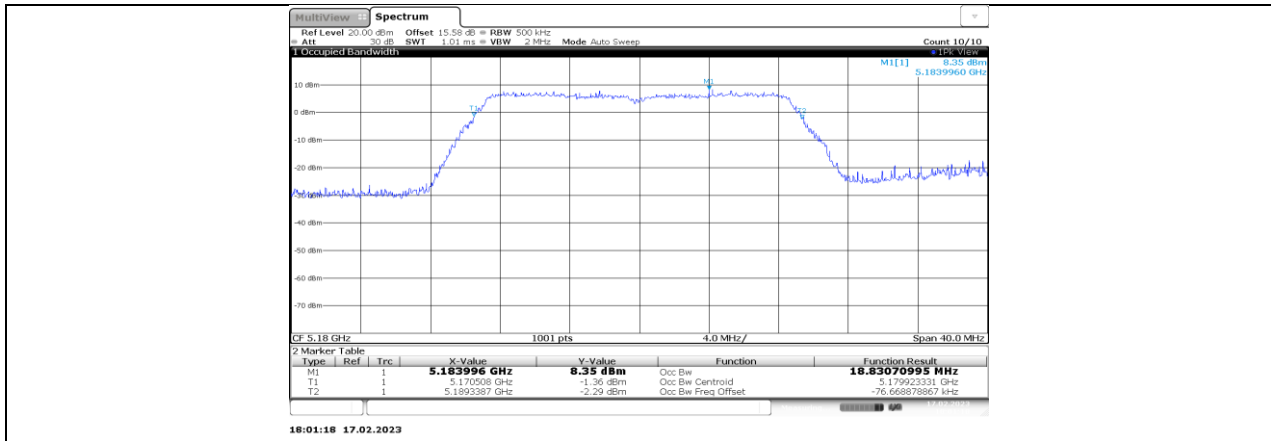


11N20SISO_Ant1_5180

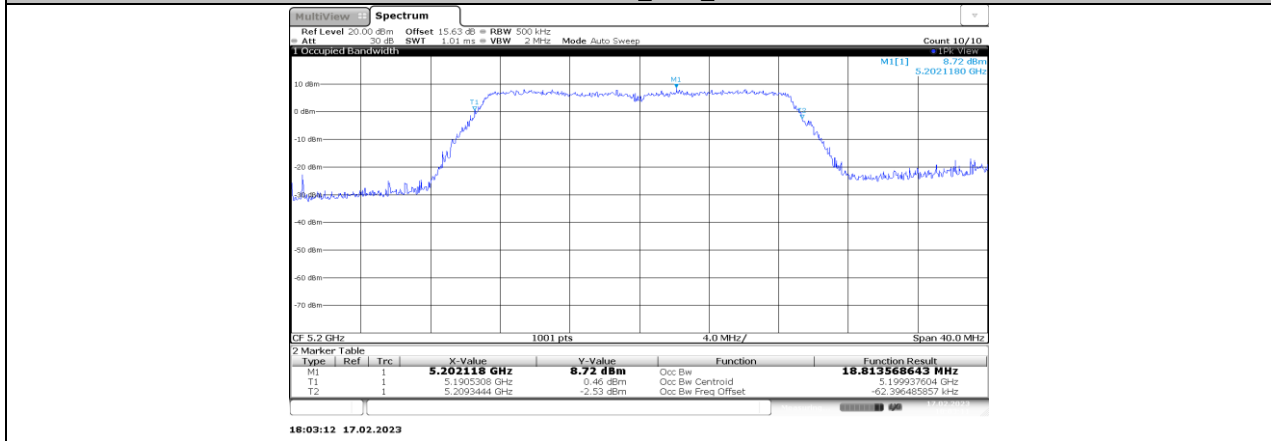


11N20SISO_Ant1_5200

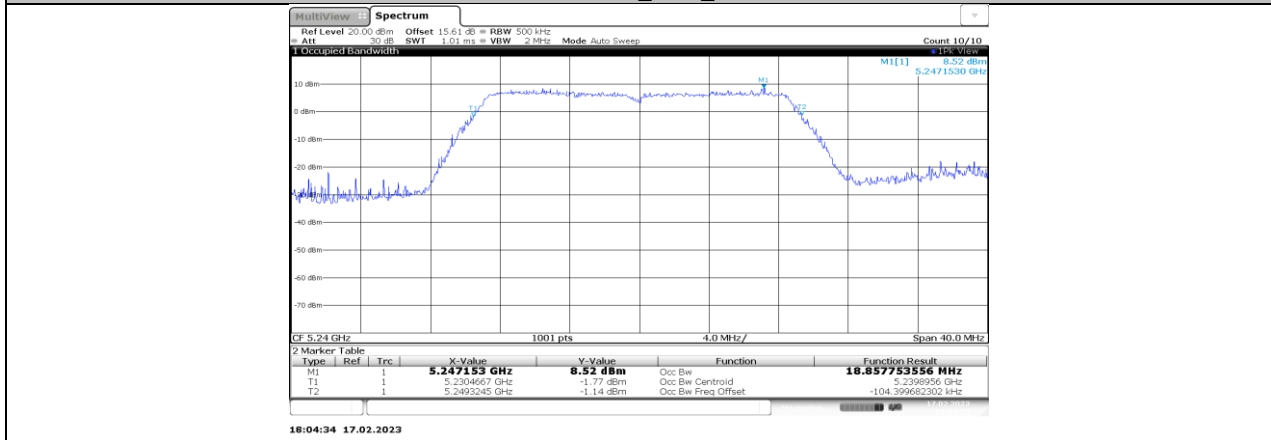


11N20SISO_Ant1_5240

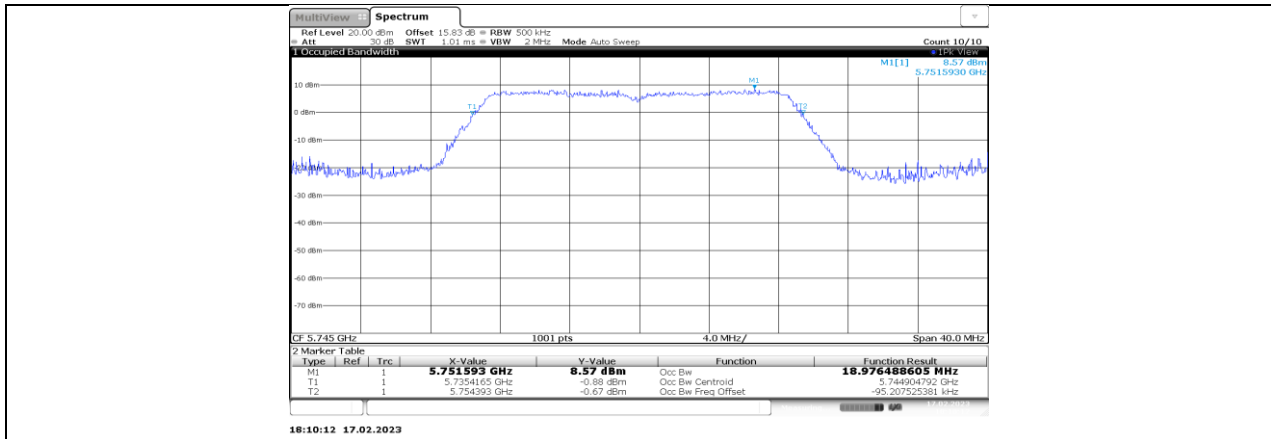


11N20SISO_Ant1_5745

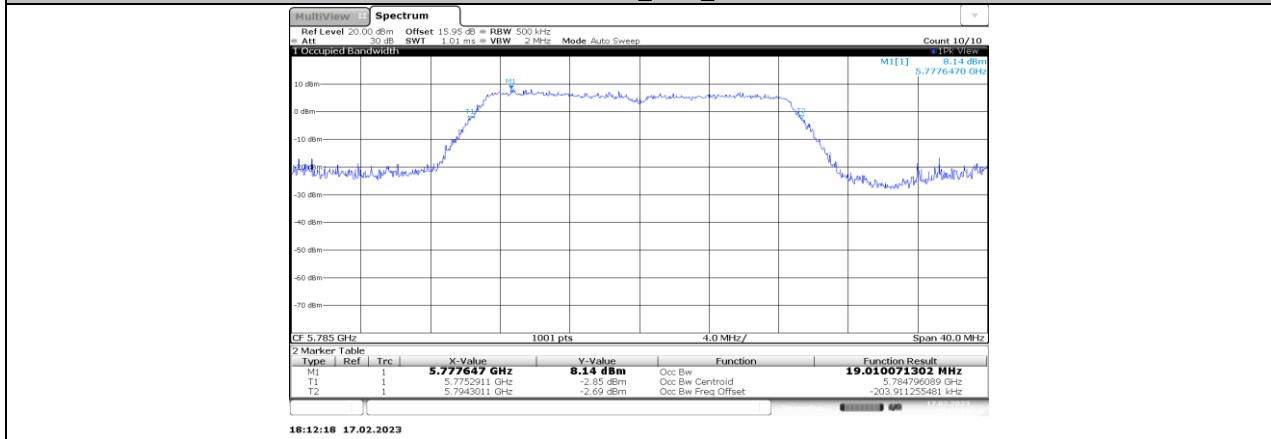


11N20SISO_Ant1_5785

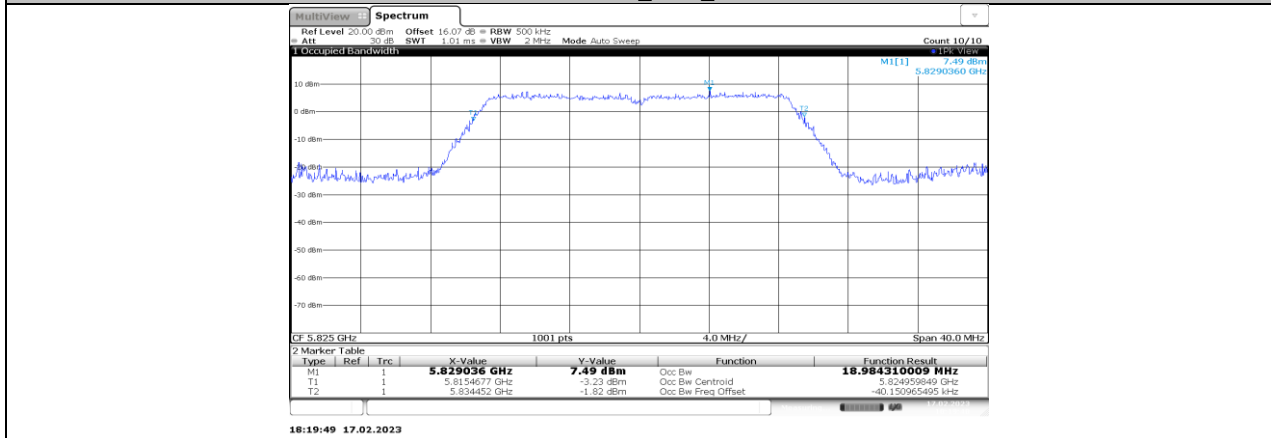


11N20SISO_Ant1_5825

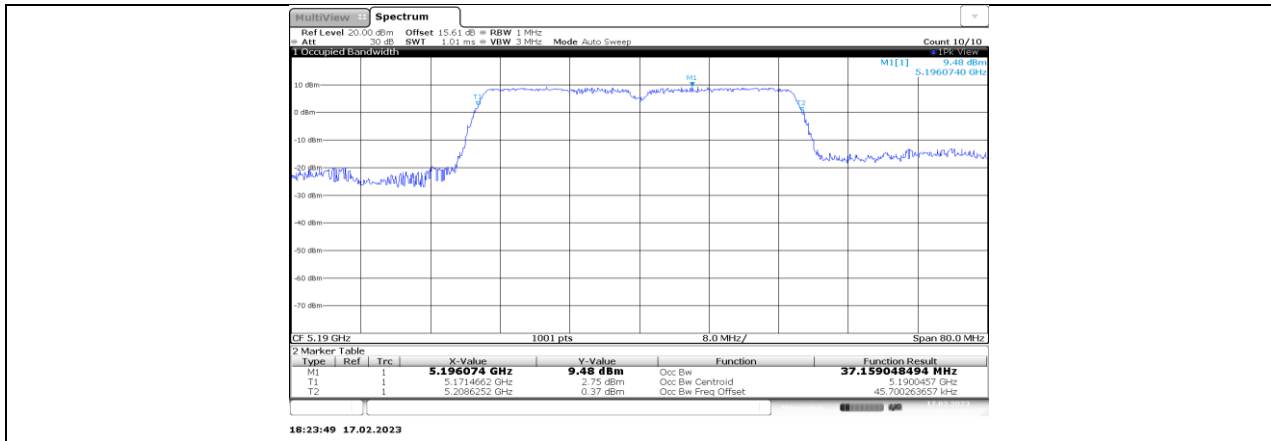




11N40SISO_Ant1_5190

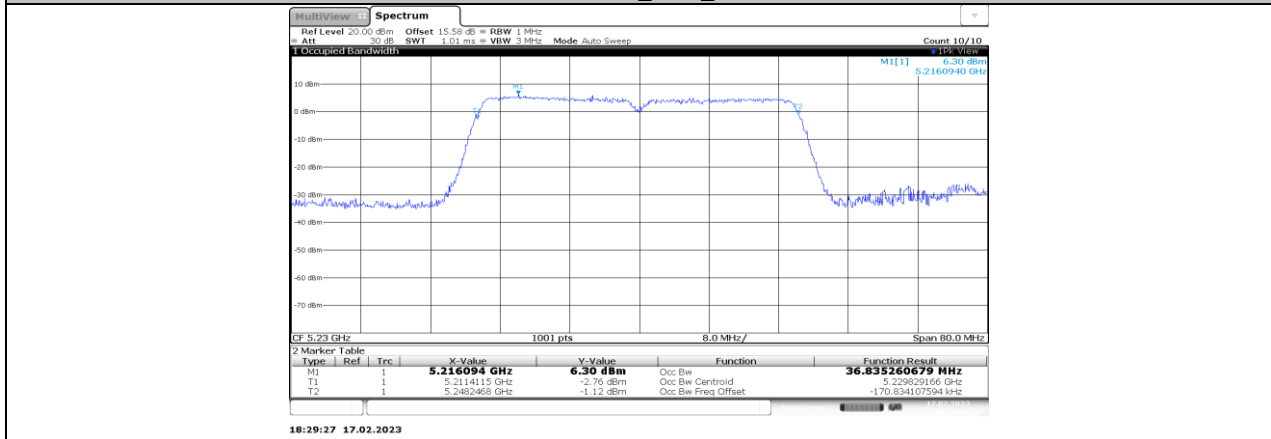

11N40SISO_Ant1_5230

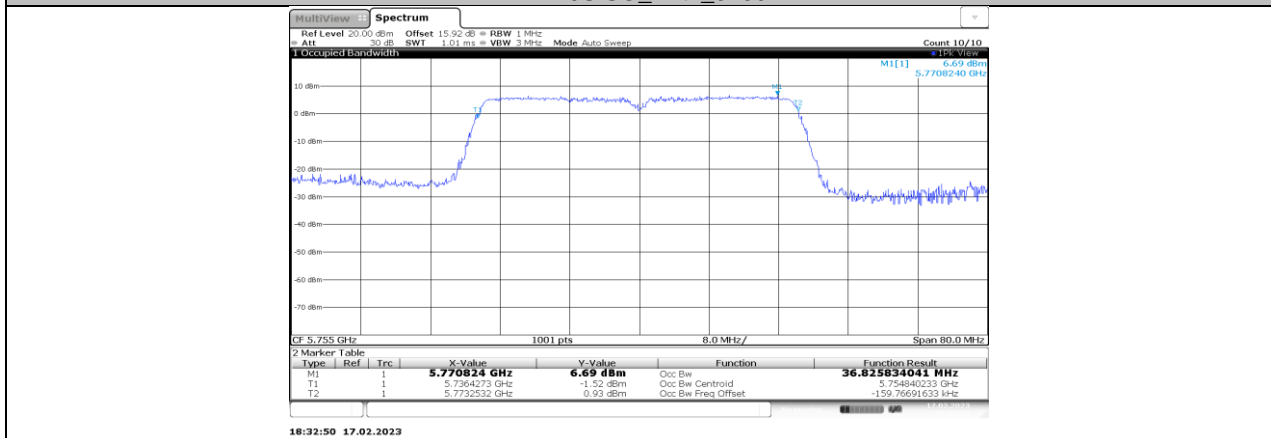

11N40SISO_Ant1_5755

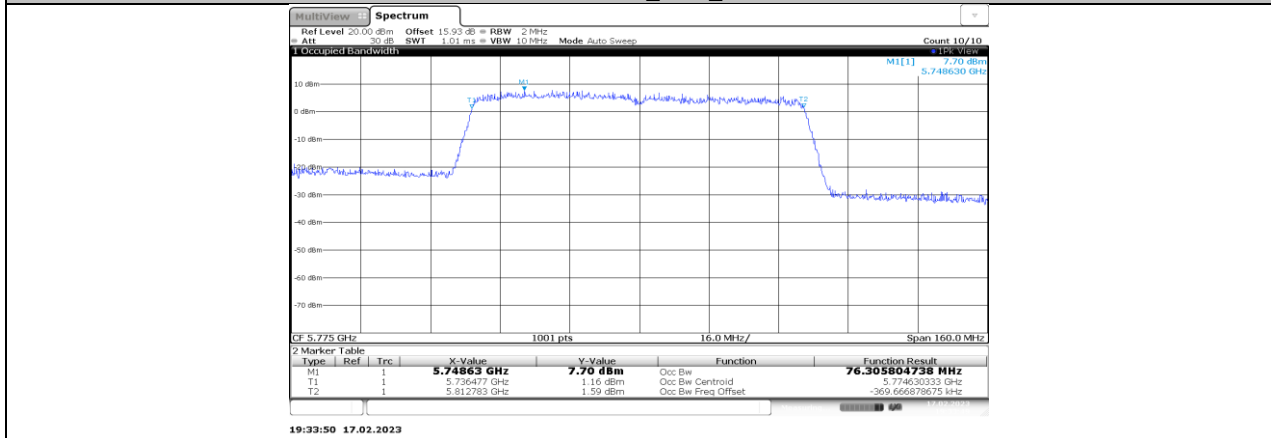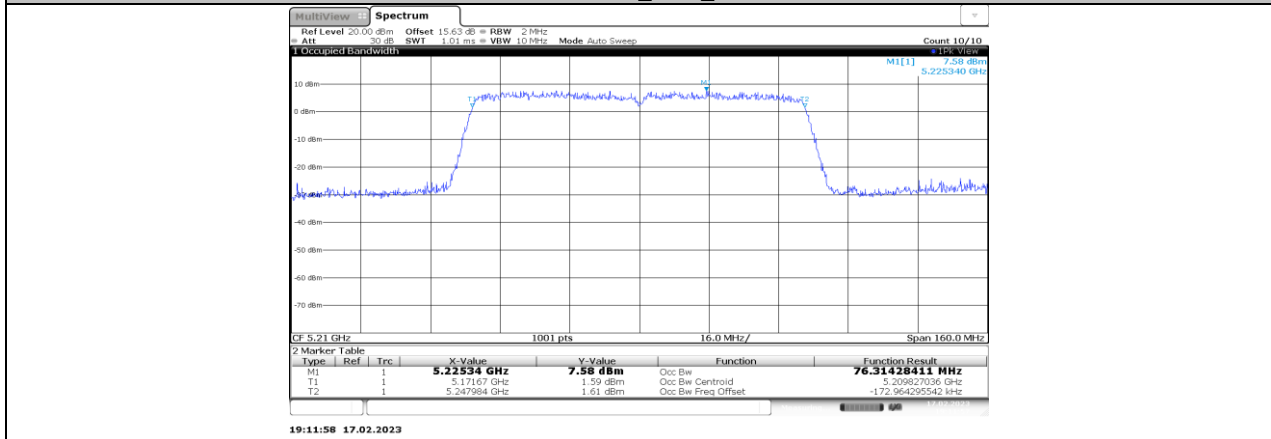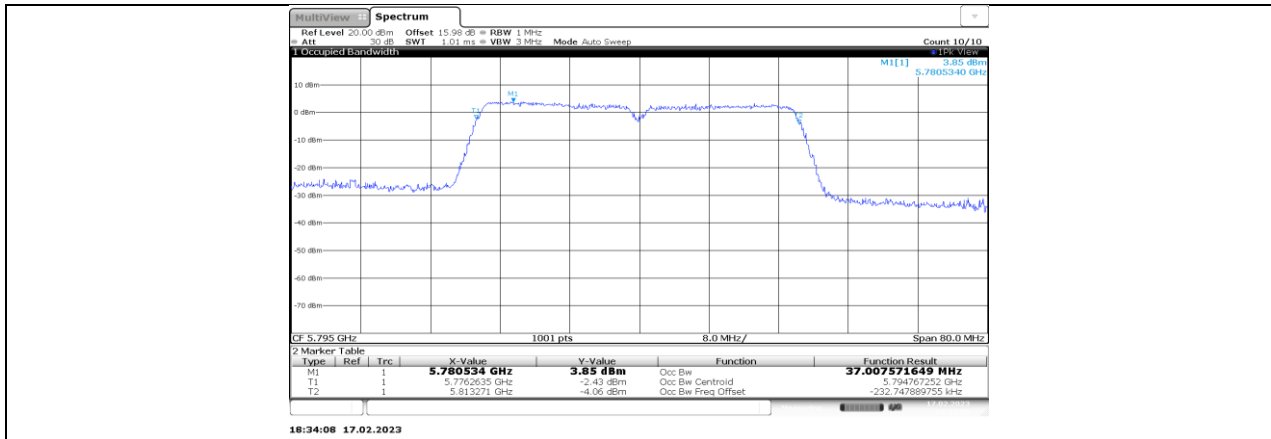




10.3. APPENDIX C: MIN EMISSION BANDWIDTH


10.3.1. Test Result

Test Mode	Antenna	Channel	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.40	5736.72	5753.12	0.5	PASS
		5785	16.40	5776.68	5793.08	0.5	PASS
		5825	16.40	5816.72	5833.12	0.5	PASS
11N20SISO	Ant1	5745	17.56	5736.12	5753.68	0.5	PASS
		5785	17.56	5776.12	5793.68	0.5	PASS
		5825	17.60	5816.12	5833.72	0.5	PASS
11N40SISO	Ant1	5755	36.32	5736.76	5773.08	0.5	PASS
		5795	35.76	5776.76	5812.52	0.5	PASS
11AC80SISO	Ant1	5775	75.20	5737.24	5812.44	0.5	PASS




10.3.2. Test Graphs

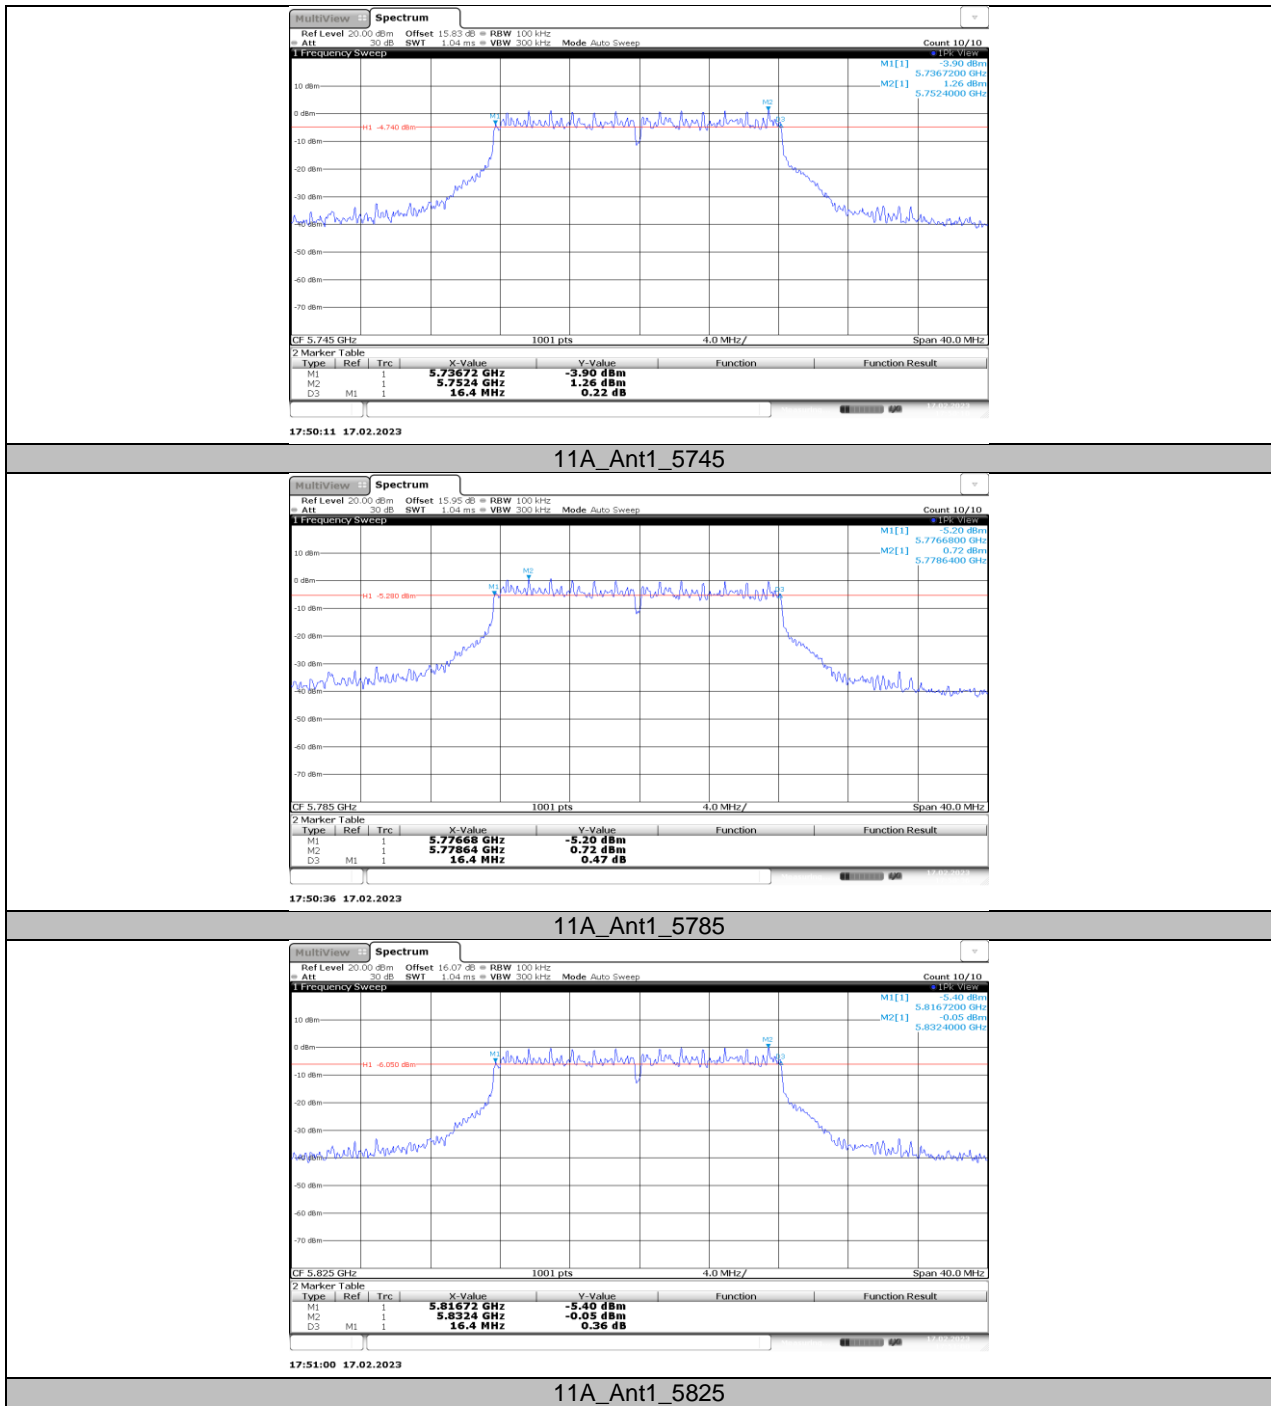


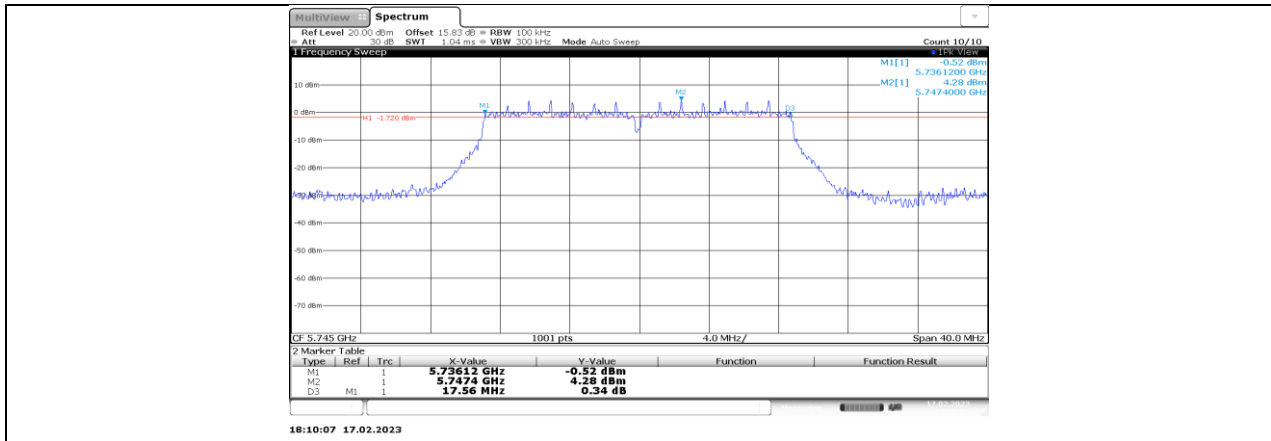


11N20SISO_Ant1_5745

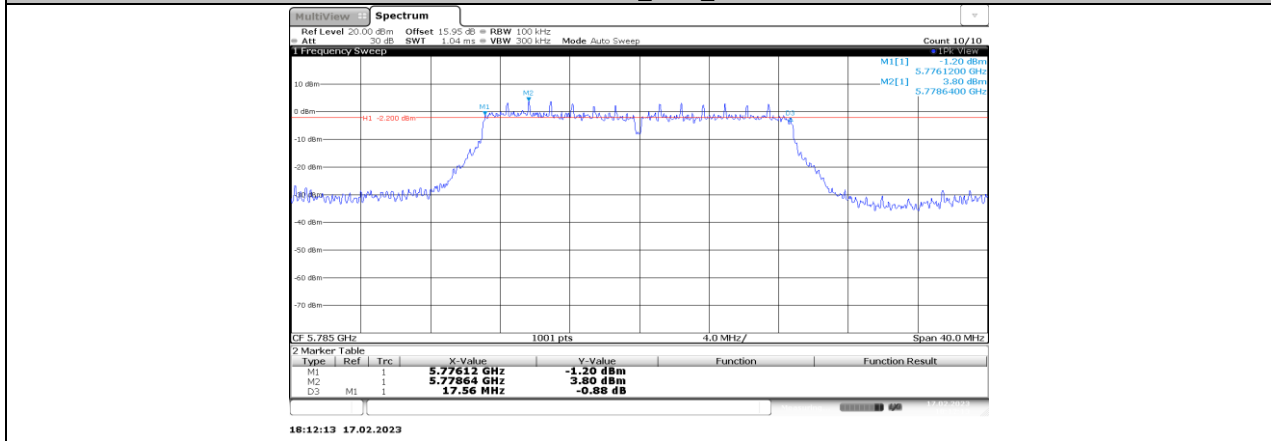


11N20SISO_Ant1_5785

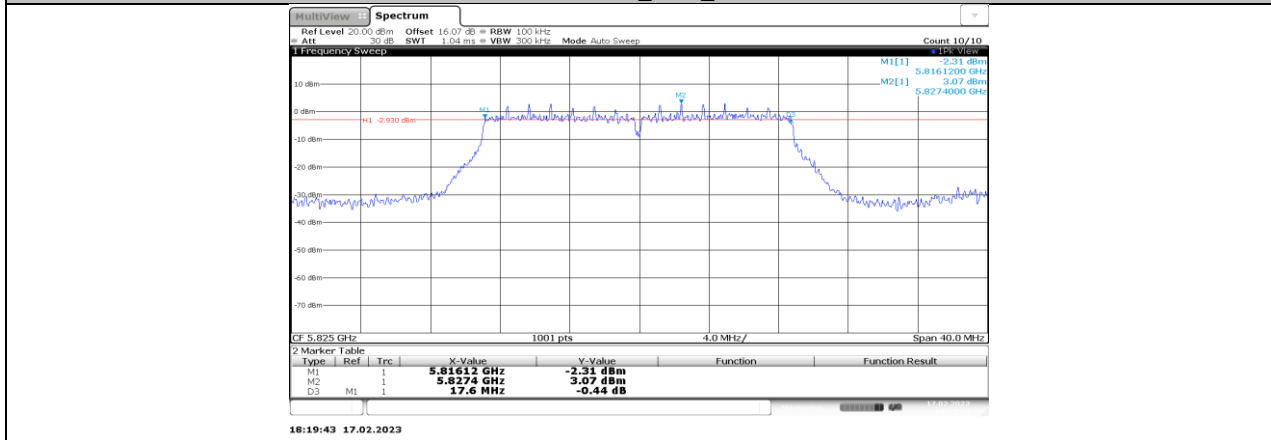


11N20SISO_Ant1_5825

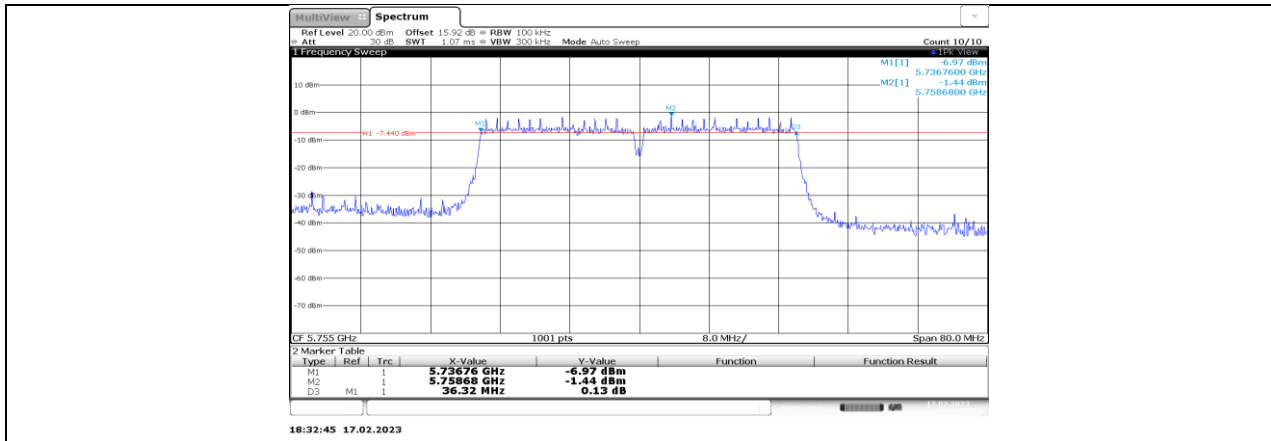

11N40SISO_Ant1_5755

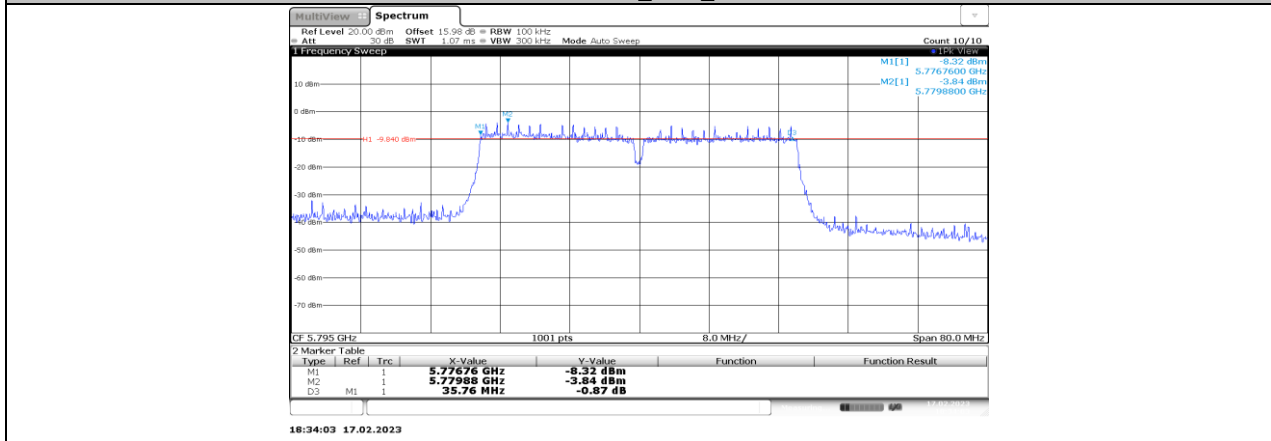

11N40SISO_Ant1_5795

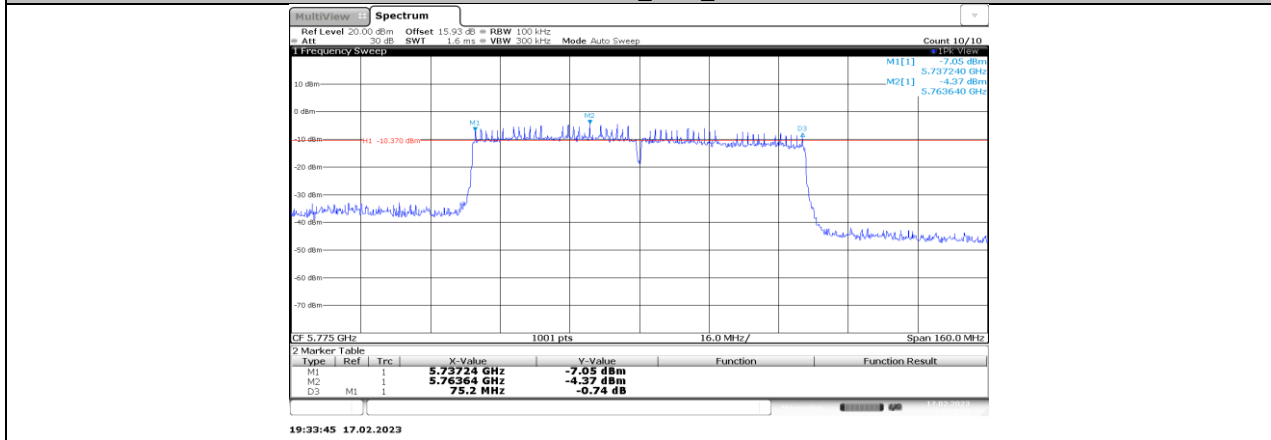

11AC80SISO_Ant1_5775

**10.4. APPENDIX D: MAXIMUM OUTPUT POWER****10.4.1. Test Result**

Test Mode	Antenna	Channel	Power [dBm]	FCC Limit [dBm]	Verdict
11A	Ant1	5180	14.75	≤23.98	PASS
		5200	15.22	≤23.98	PASS
		5240	15.15	≤23.98	PASS
		5745	15.24	≤30.00	PASS
		5785	14.32	≤30.00	PASS
		5825	13.84	≤30.00	PASS
11N20SISO	Ant1	5180	14.91	≤23.98	PASS
		5200	14.63	≤23.98	PASS
		5240	14.63	≤23.98	PASS
		5745	14.54	≤30.00	PASS
		5785	13.53	≤30.00	PASS
		5825	13.73	≤30.00	PASS
11N40SISO	Ant1	5190	15.17	≤23.98	PASS
		5230	15.52	≤23.98	PASS
		5755	15.04	≤30.00	PASS
		5795	14.82	≤30.00	PASS
11AC80SISO	Ant1	5210	14.58	≤23.98	PASS
		5775	13.46	≤30.00	PASS

Note: 1. Conducted Power=Meas. Level+ Correction Factor

2. The Duty Cycle Factor (refer to section 7.1) had already compensated to the test data.

**10.5. APPENDIX E: MAXIMUM POWER SPECTRAL DENSITY****10.5.1. Test Result**


Test Mode	Antenna	Channel	Power [dBm/MHz]	Limit [dBm/MHz]	Verdict
11A	Ant1	5180	3.77	≤11.00	PASS
		5200	4.43	≤11.00	PASS
		5240	4.31	≤11.00	PASS
		5745	1.54	≤30.00	PASS
		5785	1.11	≤30.00	PASS
		5825	0.39	≤30.00	PASS
11N20SISO	Ant1	5180	4.21	≤11.00	PASS
		5200	4.61	≤11.00	PASS
		5240	4.61	≤11.00	PASS
		5745	1.47	≤30.00	PASS
		5785	0.67	≤30.00	PASS
		5825	0.62	≤30.00	PASS
11N40SISO	Ant1	5190	1.67	≤11.00	PASS
		5230	2.21	≤11.00	PASS
		5755	-2.14	≤30.00	PASS
		5795	-1.52	≤30.00	PASS
11AC80SISO	Ant1	5210	-2.49	≤11.00	PASS
		5775	-5.18	≤30.00	PASS




Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.

2.The Duty Cycle Factor and RBW Factor is compensated in the graph.




10.5.2. Test Graphs

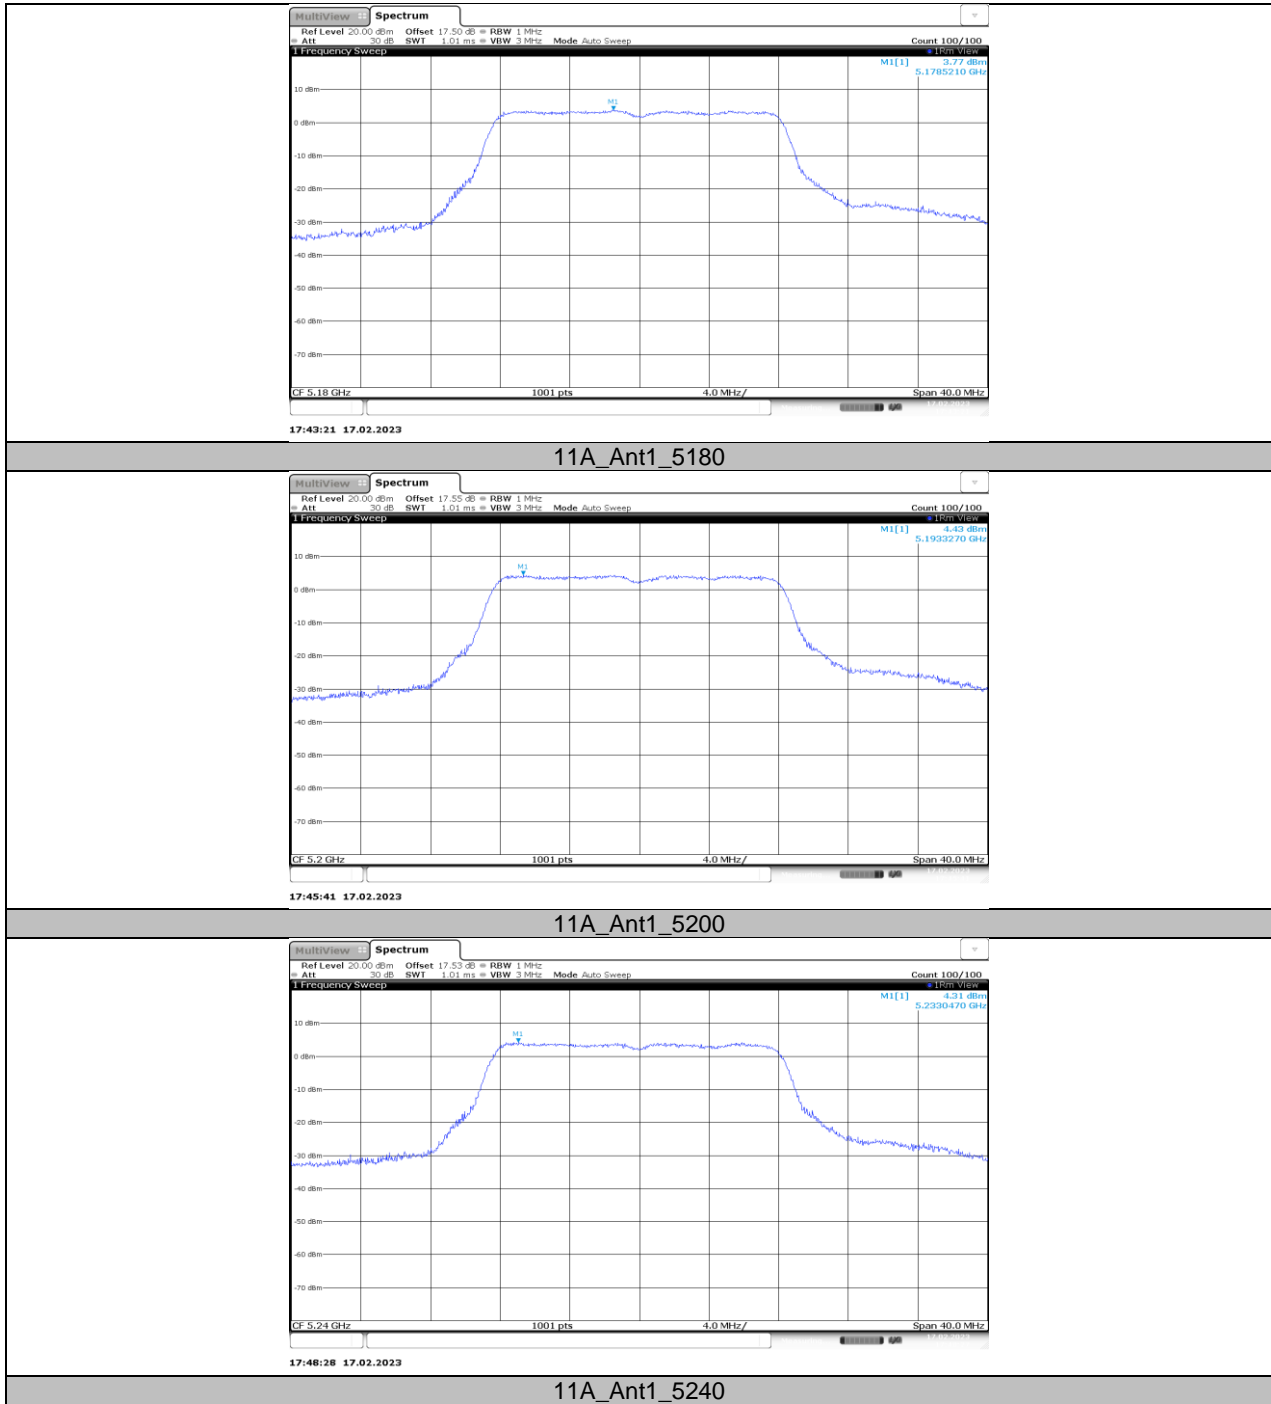


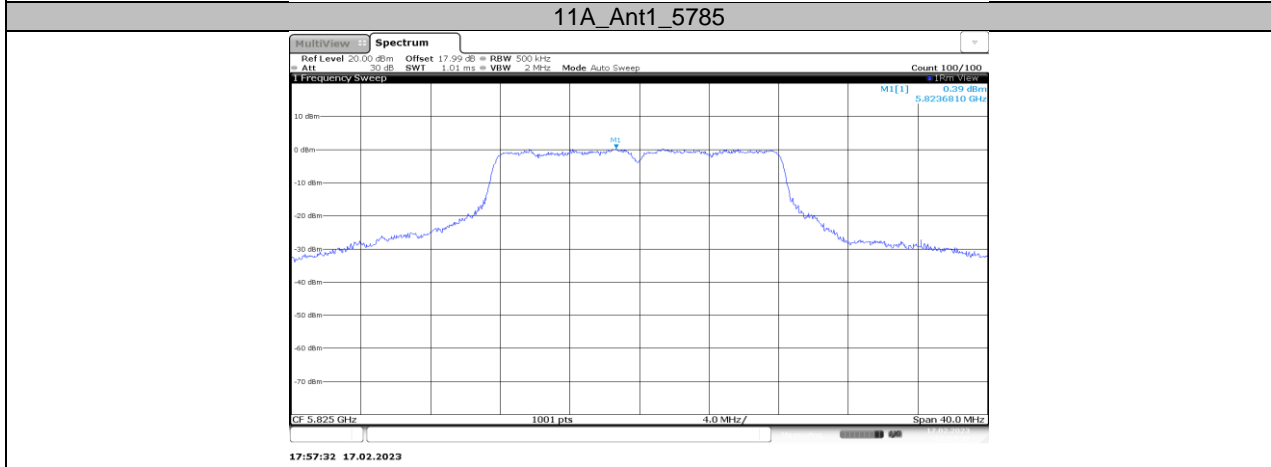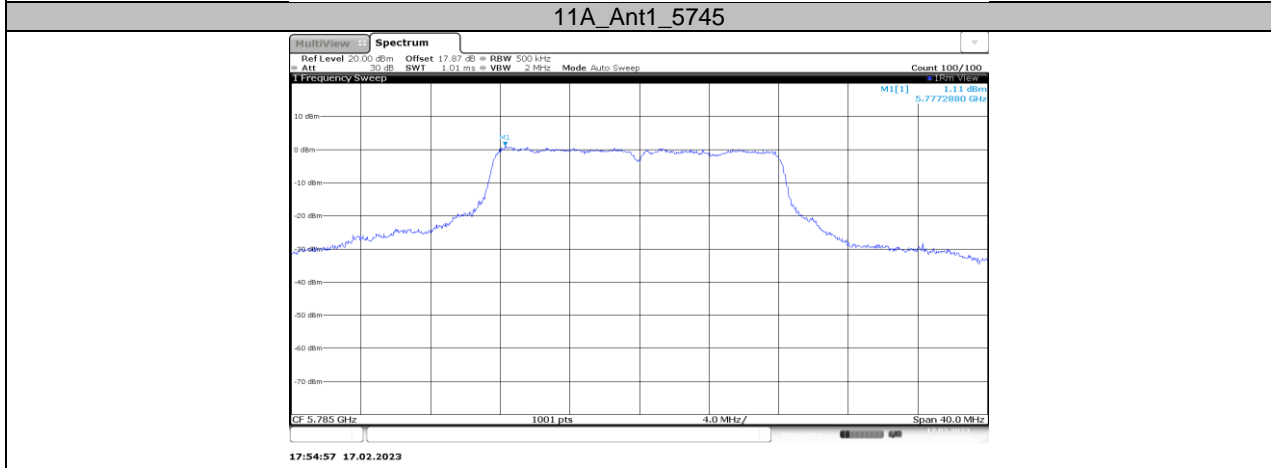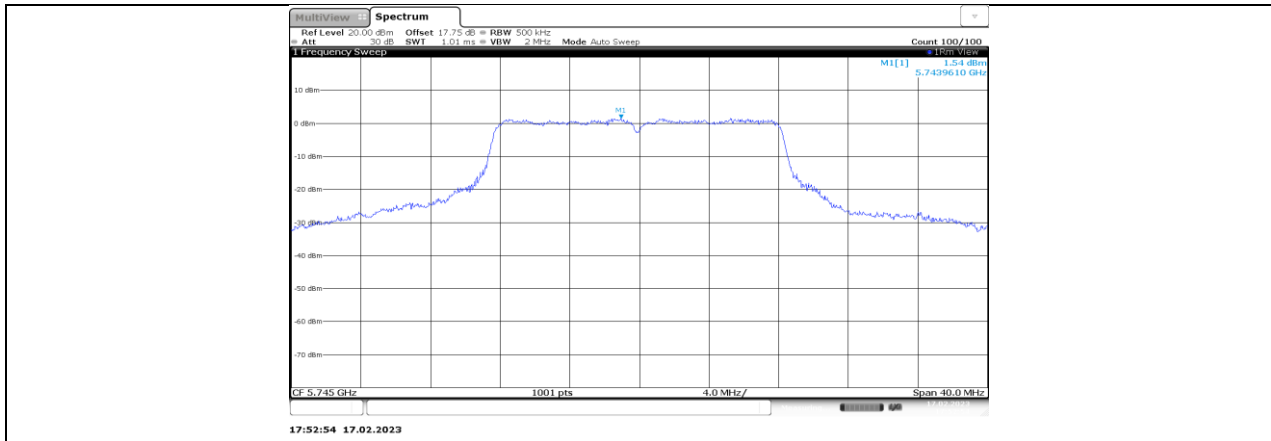


11A_Ant1_5825

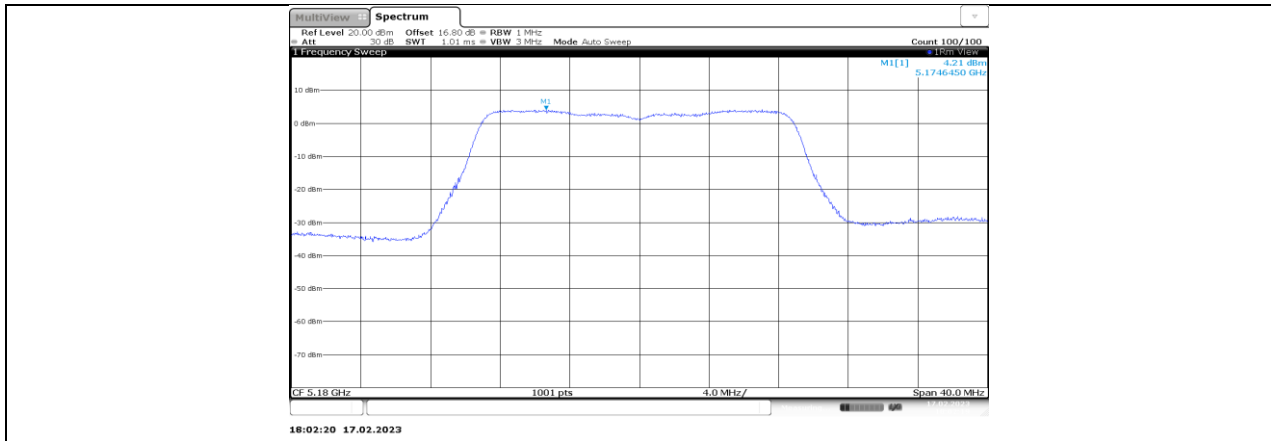


11N20SISO_Ant1_5180

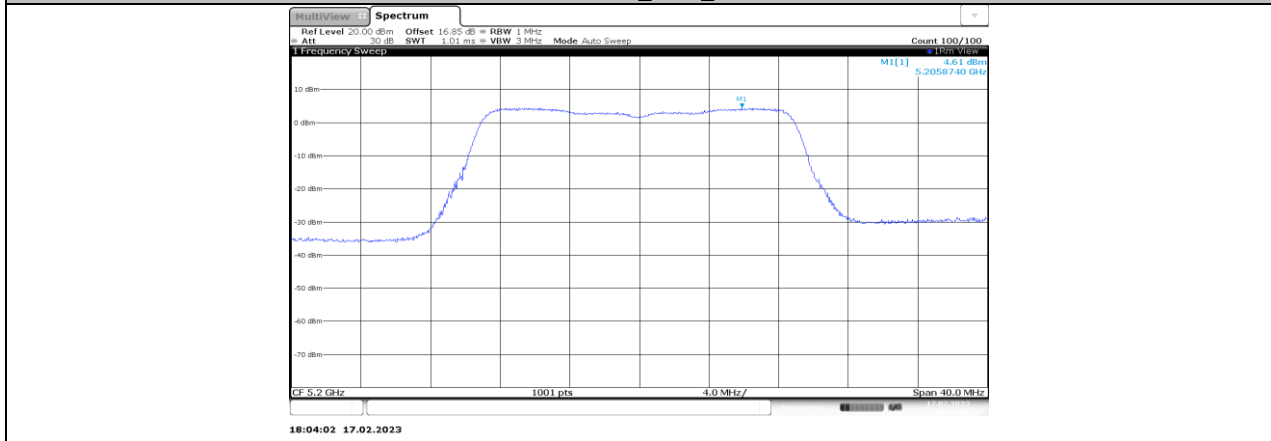


11N20SISO_Ant1_5200

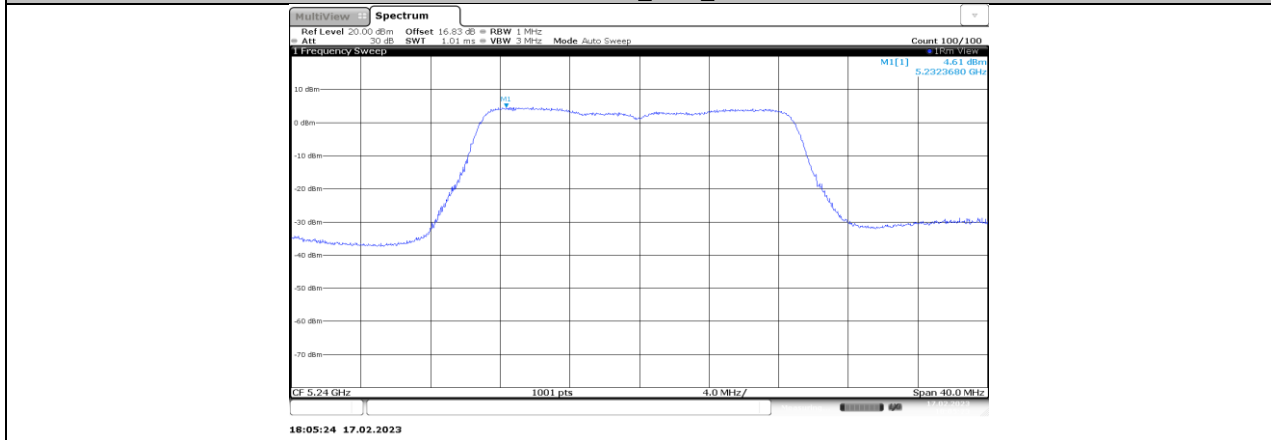


11N20SISO_Ant1_5240

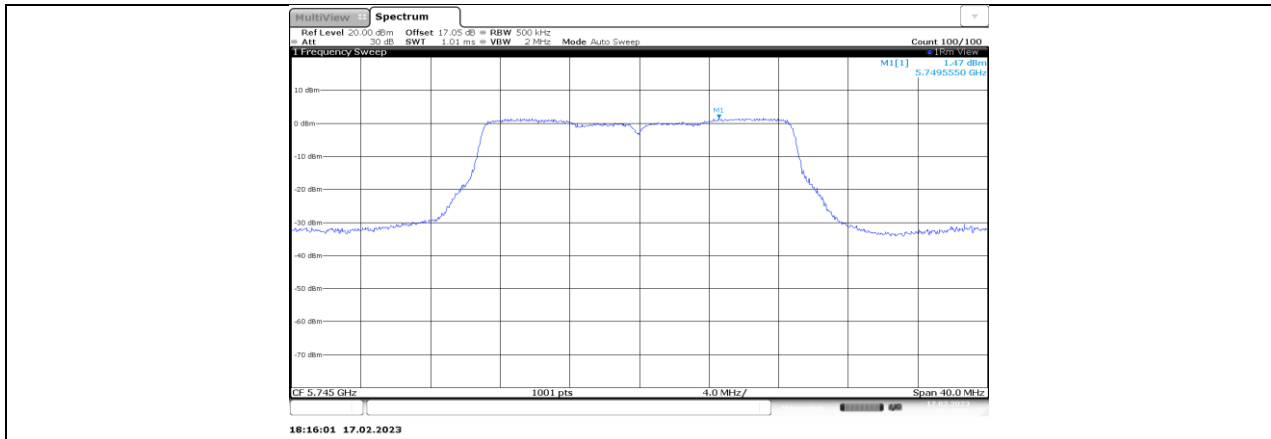


11N20SISO_Ant1_5745

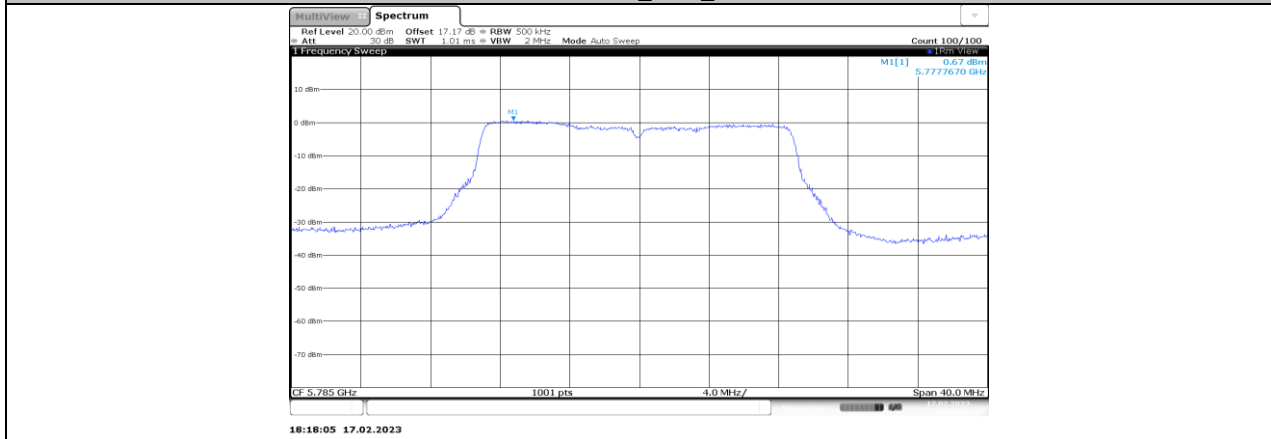


11N20SISO_Ant1_5785

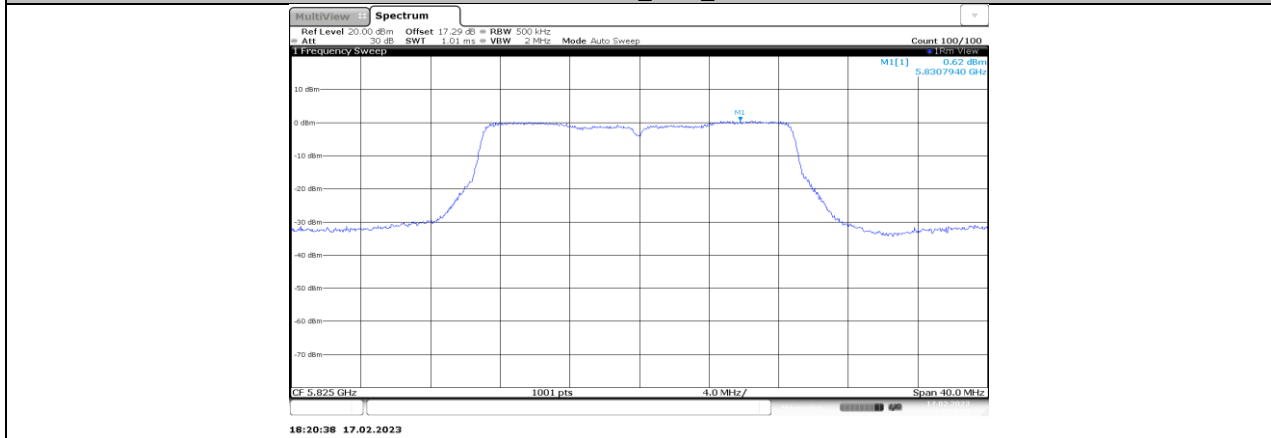


11N20SISO_Ant1_5825

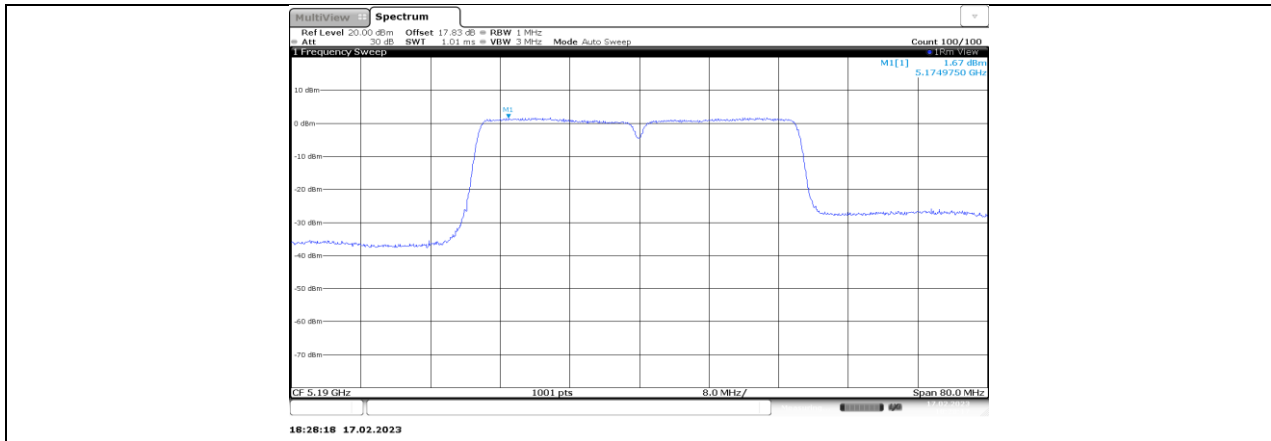


11N40SISO_Ant1_5190

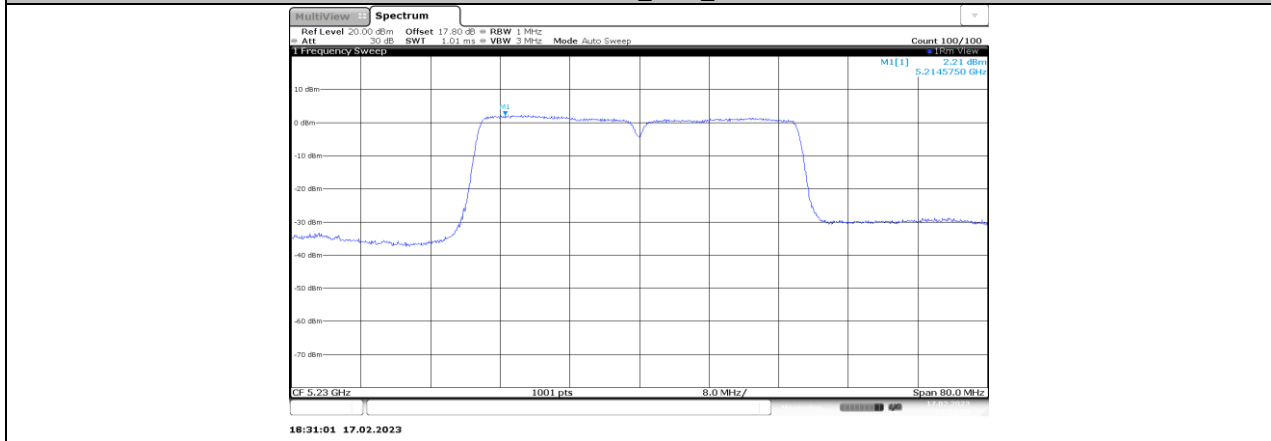


11N40SISO_Ant1_5230

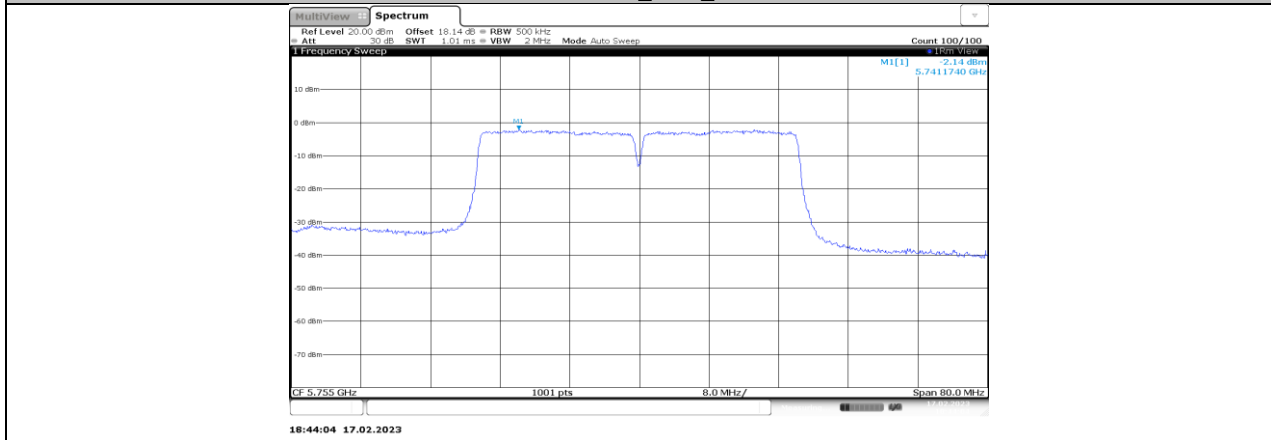


11N40SISO_Ant1_5755

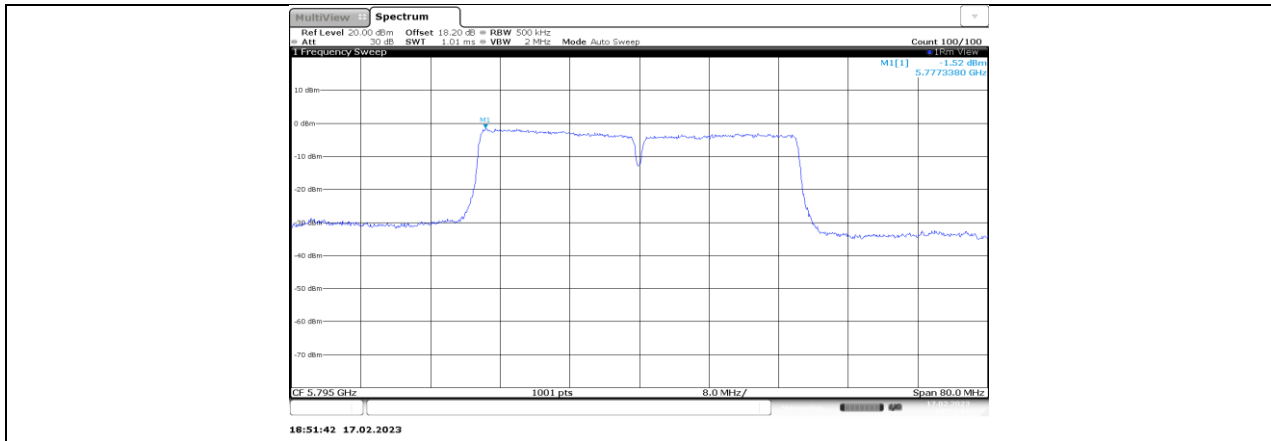

11N40SISO_Ant1_5795

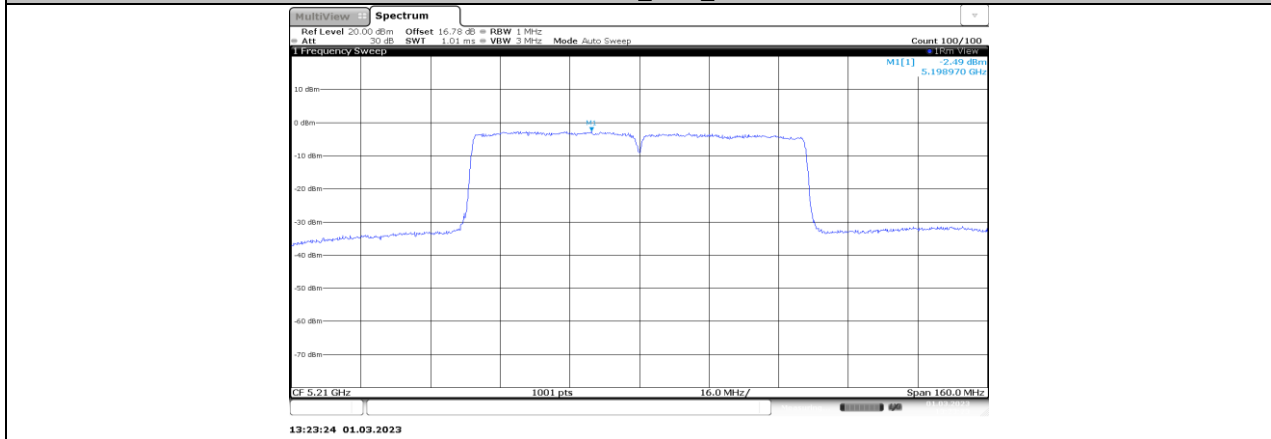

11AC80SISO_Ant1_5210

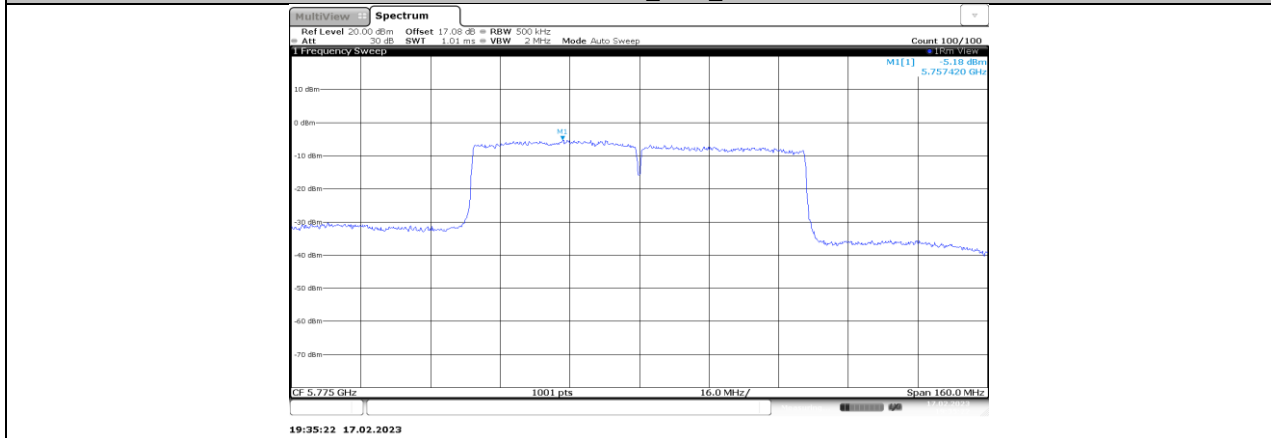

11AC80SISO_Ant1_5775



10.6. APPENDIX F: FREQUENCY STABILITY
10.6.1. Test Result

Frequency Error vs. Voltage									
802.11a 20: 5200MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
TN	VL	5199.9915	-1.64	5199.9911	-1.71	5200.0134	2.57	5200.0190	3.66
TN	VN	5200.0144	2.77	5199.9876	-2.38	5200.0175	3.37	5199.9795	-3.94
TN	VH	5199.9788	-4.08	5200.0003	0.07	5199.9921	-1.52	5200.0110	2.12
Frequency Error vs. Temperature									
802.11a 20: 5200MHz									
Temp.	Volt.	0 Minute		2 Minute		5 Minute		10 Minute	
		Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)	Freq.Error (MHz)	Tolerance (ppm)
65	VN	5199.9871	-2.48	5200.0230	4.42	5200.0131	2.53	5199.9973	-0.52
60	VN	5199.9851	-2.87	5200.0083	1.59	5200.0199	3.83	5200.0097	1.87
50	VN	5200.0222	4.27	5200.0095	1.83	5199.9991	-0.18	5199.9969	-0.60
40	VN	5200.0117	2.25	5199.9771	-4.40	5200.0227	4.36	5200.0133	2.57
30	VN	5200.0189	3.63	5200.0104	1.99	5199.9861	-2.68	5200.0079	1.52
20	VN	5200.0150	2.89	5200.0019	0.36	5199.9924	-1.46	5200.0019	0.36
10	VN	5200.0217	4.17	5199.9894	-2.04	5199.9895	-2.01	5199.9940	-1.15
0	VN	5200.0038	0.73	5200.0187	3.59	5200.0004	0.08	5199.9955	-0.86
-10	VN	5200.0139	2.67	5199.9781	-4.22	5199.9862	-2.66	5200.0047	0.90
-20	VN	5200.0218	4.19	5199.9851	-2.87	5200.0165	3.18	5200.0049	0.94
-30	VN	5199.9990	-0.19	5199.9981	-0.37	5199.9897	-1.97	5199.9882	-2.27

Note:

1. All modes have been tested, only the worst data record in the report.
2. For the detail Test Conditions, please refer to section 7.5.



10.7. APPENDIX G: DUTY CYCLE

10.7.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11A	0.18	0.28	0.6429	64.29	1.92	5.56	6
11N20SISO	1.32	1.75	0.7543	75.43	1.22	0.76	1
11N40SISO	0.66	0.76	0.8684	86.84	0.61	1.52	2
11AC80SISO	0.67	1.02	0.6569	65.69	1.83	1.49	2

Note:

Duty Cycle Correction Factor=10log (1/x).


Where: x is Duty Cycle (Linear)


Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.



10.7.2. Test Graphs

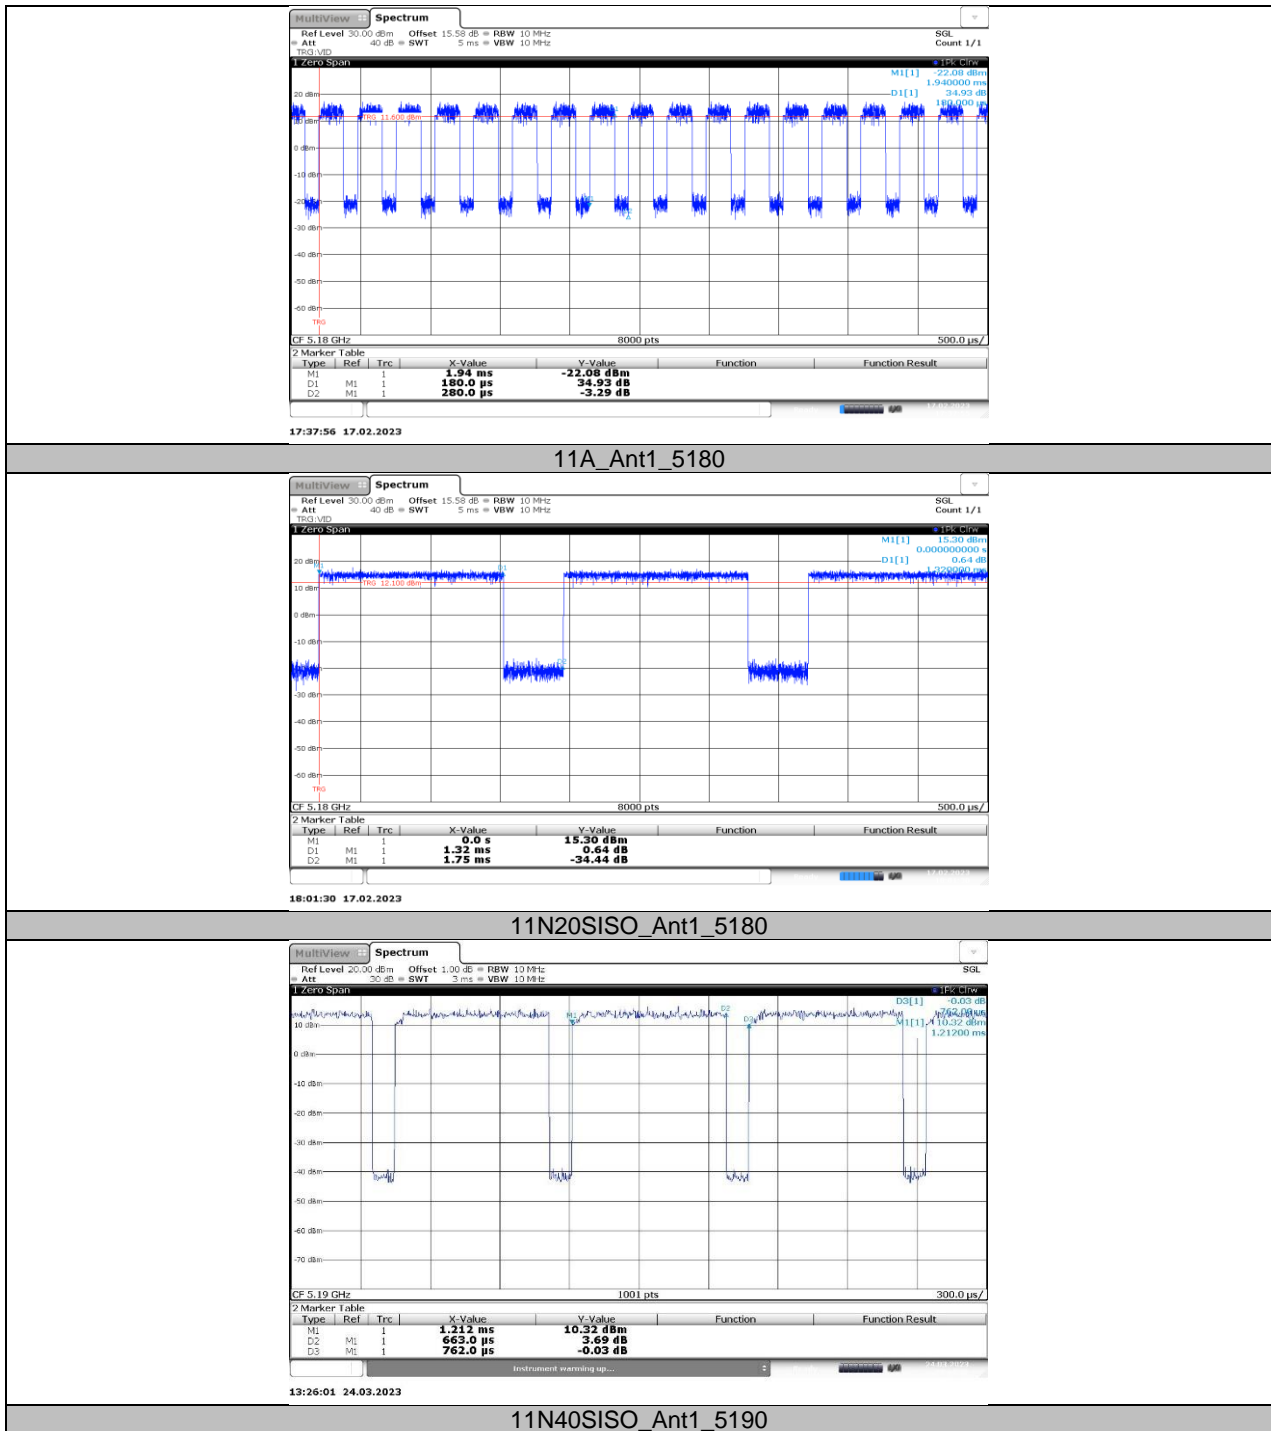

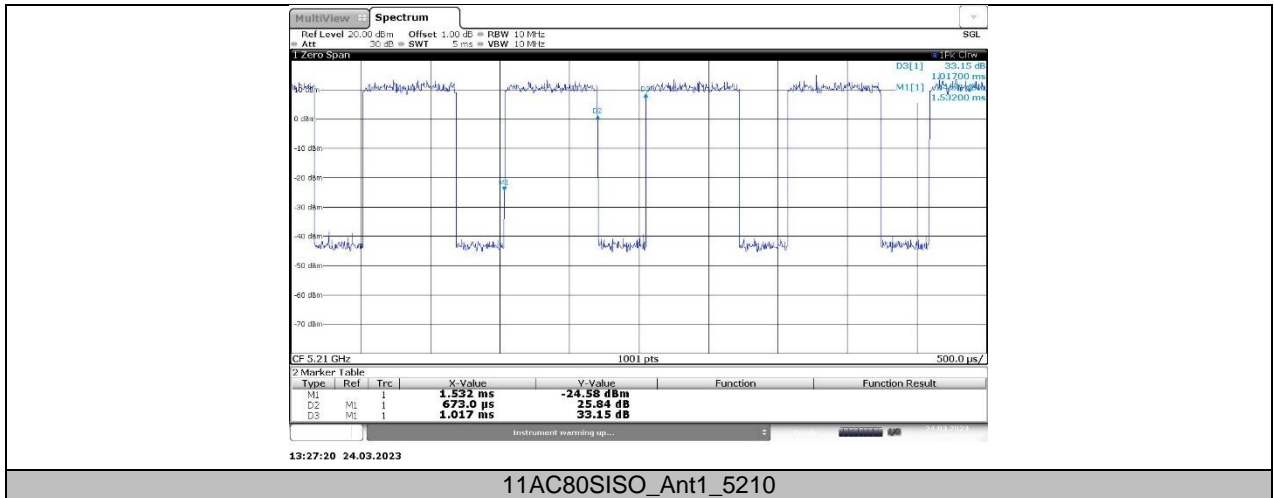

END OF REPORT