



**FCC Certification Test Report
For the
Applied Micro Design, Inc.
1456 FFDPA-700 Booster Amplifier**

FCC ID: 2AES2-1456FFDPA-700

**WLL JOB# 14422-01 Rev 2
Revised August 25, 2016**

Prepared for:

**Applied Micro Design Inc.
19516 Amaranth Drive
Germantown, MD, 20874**

Prepared By:

**Washington Laboratories, Ltd.
7560 Lindbergh Drive
Gaithersburg, Maryland 20879**



Testing Certificate AT-1448

**FCC Certification Test Report
for the
Applied Micro Design Inc.
1456 FFDPA-700 Booster Amplifier
FCC ID: 2AES2-1456FFDPA-700**


**Revised August 25, 2016
WLL JOB# 14422-01 Rev 2**

Prepared by:



James Ritter
EMC Compliance Engineer

Reviewed by:



Steven D. Koster
President

Abstract

This report has been prepared on behalf of Applied Micro Design Inc. to support the attached Application for Equipment Authorization. The test report and application are submitted for a Class B Industrial Signal Booster under Part 90.219 (2013) of the FCC Rules and Regulations of the FCC rules. The test report was constructed with guidance from KDB 935210 D05 Industrial Booster Basic Measurement v01 V01R01.

Testing was performed at Washington Laboratories, Ltd, 7560 Lindbergh Drive, Gaithersburg, MD 20879.

Washington Laboratories, Ltd. has been accepted by the FCC and approved by ANAB under Certificate AT-1448 as an independent FCC test laboratory.

These tests are accredited and meet the requirements of ISO/IEC 17025:2005 as verified by the ANSI-ASQ National Accreditation Board/ANAB. Refer to certificate and scope of accreditation AT-1448.

Revision History	Description of Change	Date
Rev 0	Initial Release	May 09, 2016
Rev 1	Added clarification on test setup and added definitive statements for FCC part219(e) requirements	June 17, 2016
Rev 2	Added testing for P25 Modulation s under sections 4.1,4.3,& 4.4.	August 25, 2016

Table of Contents

Abstract	iii
1 Introduction	1
1.1 Compliance Statement	1
1.2 Test Scope	1
1.3 Contract Information	1
1.4 Test Dates	1
1.5 Test and Support Personnel	1
1.6 Abbreviations	2
2 Equipment Under Test	3
2.1 EUT Identification & Description	3
2.2 Test Configuration	3
2.3 Test Location	5
2.4 Measurement Uncertainty	6
3 Test Equipment	8
4 Test Results	9
4.1 EUT AGC Threshold (935210 DO5 section 4.2)	9
4.2 Out of Band Rejection (935210 DO5 section 4.3)	12
4.3 EUT input-versus-output signal comparison (935210 DO5 section 4.4)	15
4.4 EUT input/output power and amplifier gain (935210 DO5 section 4.5)	59
4.4.1 Results:	60
4.5 EUT noise figure measurement (935210 DO5 section 4.6)	92
4.5.1 Results	93
4.6 Out-of-band/block (including intermodulation) & spurious emissions (935210 DO5 section 4.7)	94
4.6.1 Results	94
4.6.2 KDB 935210 D05 Section 4.7.3 EUT spurious emissions conducted measurement	
107	
4.7 EUT frequency stability measurements (935210 DO5 section 4.8)	138
4.7.1 Summary	138
4.8 EUT spurious emissions radiated measurements (935210 DO5 section 4.9)	138
4.8.1 Test Method	138
4.8.2 Radiate Spurious Summary	138

List of Tables

Table 1: Device Summary	3
Table 2: Expanded Uncertainty List	7
Table 3: Test Equipment List	8
Table 4: AGC Threshold Level	10
Table 5: Out of Band Rejection	12
Table 6: Test Signals	15
Table 7: Input/ Output Power and Amplifier Gain	61

Table 8: Noise Figure.....	93
Table 9: Intermodulation products.....	94
Table 10: Radiated Spurious Results	139

List of Figures

Figure 1: Simplified Top Level Block Diagram	4
Figure 2: Test Block Diagram.....	5
Figure 3: 769-775MHz Primary Amp Out of Band Rejection	13
Figure 4: 769-775MHz Secondary Amp Out of Band Rejection	14
Figure 5: 769-775MHz signal comparison CW input.....	17
Figure 6: 769-775MHz comparison CW Output-Primary Amp	18
Figure 7: 769-775MHz comparison CW Output-Secondary Amp	19
Figure 8: 769-775MHz comparison 11K3F3E input	20
Figure 9: 769-775MHz comparison 11K3F3E Output-Primary Amp.....	21
Figure 10: 769-775MHz comparison 11K3F3E Output-Secondary Amp.....	22
Figure 11: 769-775MHz comparison 16K0F3E input	23
Figure 12: 769-775MHz comparison 16K0F3E Output- Primary Amp	24
Figure 13: 769-775MHz comparison 16K0F3E Output- Secondary amp	25
Figure 14: 769-775MHz comparison CW input, Level 3dB over AGC	26
Figure 15: 769-775MHz comparison, CW Output, Mask C- Primary Amp, 3dB over AGC	27
Figure 16: 769-775MHz comparison, CW Output, Mask C- Secondary Amp, 3dB over AGC ..	28
Figure 17: 769-775MHz comparison 11K3F3E input, Mask C, Level 3dB over AGC	29
Figure 18: 769-775MHz comparison 11K3F3E input, Mask C- Primary Amp, 3dB over AGC ..	30
Figure 19: 769-775MHz comparison 11K3F3E input, Mask C- Secondary Amp, 3dB over AGC	31
Figure 20: 769-775MHz comparison 16K0F3E input, Mask C, Level 3dB over AGC	32
Figure 21: 769-775MHz comparison, 16K0F3E Output, Mask C- Primary Amp, 3dB over AGC	33
Figure 22: 769-775MHz comparison, 16K0F3E Output, Mask C- Secondary Amp, 3dB over AGC	34
Figure 23: 769-775MHz, P25 Ph1 LSM, Input Amp, 0.5dB under AGC	35
Figure 24: 769-775MHz, P25 Ph1 LSM Output, Mask C- Primary Amp, 0.5dB under AGC.....	36
Figure 25: 769-775MHz, P25 Ph1 LSM Output, Mask C- Secondary Amp, 0.5db under AGC ..	37
Figure 26: 769-775MHz, P25 Ph1 LSM, Input Amp, 3dB over AGC	38
Figure 27: 769-775MHz, P25 Ph1 LSM Output, Mask C- Primary Amp, 3dB over AGC.....	39
Figure 28: 769-775MHz, P25 Ph1 LSM Output, Mask C- Secondary Amp, 3db over AGC ..	40
Figure 29: 769-775MHz, P25 Ph1 C4FM, Input Amp, 0.5dB under AGC.....	41
Figure 30: 769-775MHz, P25 Ph1 C4FM Output, Mask C- Primary Amp, 0.5dB under AGC ..	42
Figure 31: 769-775MHz, P25 Ph1 C4FM Output, Mask C- Secondary Amp, 0.5db under AGC	43
Figure 32: 769-775MHz, P25 Ph1 C4FM, Input Amp, 3dB over AGC	44
Figure 33: 769-775MHz, P25 Ph1C4FM Output, Mask C- Primary Amp, 3dB over AGC	45
Figure 34: 769-775MHz, P25 Ph1 C4FM Output, Mask C- Secondary Amp, 3db over AGC ..	46
Figure 35: 769-775MHz, P25 Ph1 CQPSK, Input Amp, 0.5dB under AGC	47
Figure 36: 769-775MHz, P25 Ph1 CQPSK Output, Mask C- Primary Amp, 0.5dB under AGC	48

Figure 37: 769-775MHz, P25 Ph1 CQPSK Output, Mask C- Secondary Amp, 0.5db under AGC	49
Figure 38: 769-775MHz, P25 Ph1 CQPSK, Input Amp, 3dB over AGC	50
Figure 39: 769-775MHz, P25 Ph1 CQPSK Output, Mask C- Primary Amp, 3dB over AGC	51
Figure 40: 769-775MHz, P25 Ph1 CQPSK Output, Mask C- Secondary Amp, 3db over AGC..	52
Figure 41: 769-775MHz, P25 Ph2 HDQPSK, Input Amp, 0.5dB under AGC	53
Figure 42: 769-775MHz, P25 Ph2 HDQPSK Output, Mask C- Primary Amp, 0.5dB under AGC	54
Figure 43: 769-775MHz, P25 Ph2 HDQPSK Output, Mask C- Secondary Amp, 0.5db under AGC	55
Figure 44: 769-775MHz, P25 Ph2 HDQPSK, Input Amp, 3dB over AGC	56
Figure 45: 769-775MHz, P25 Ph2 HDQPSK Output, Mask C- Primary Amp, 3dB over AGC..	57
Figure 46: 769-775MHz, P25 Ph2 HDQPSK Output, Mask C- Secondary Amp, 3db over AGC	58
Figure 50: Power/Gain-769-775MHz Input set below AGC threshold	62
Figure 51: Power/Gain-769-775MHz Output set below AGC threshold-Primary Amp	63
Figure 52 Power/Gain-769-775MHz Output set below AGC threshold-Secondary Amp	64
Figure 53: Power/Gain-769-775MHz Input set 3dB above AGC threshold.....	65
Figure 54: Power/Gain-769-775MHz Output set 3dB above threshold-Primary Amp	66
Figure 55 Power/Gain-769-775MHz Output set 3dB above threshold-Secondary Amp	67
Figure 55 Power/Gain-P25 Ph1 LSM input set below threshold.....	68
Figure 55 Power/Gain- P25 Ph1 LSM Output set below threshold-Primary Amp.....	69
Figure 55 Power/Gain- P25 Ph1 LSM Output set below threshold-Secondary Amp.....	70
Figure 55 Power/Gain-P25 Ph1 LSM input set above threshold.....	71
Figure 55 Power/Gain- P25 Ph1 LSM Output set above threshold-Primary Amp.....	72
Figure 55 Power/Gain- P25 Ph1 LSM Output set above threshold-Secondary Amp.....	73
Figure 55 Power/Gain-P25 Ph1 C4FM input set below threshold	74
Figure 55 Power/Gain- P25 Ph1 C4FM Output set below threshold-Primary Amp	75
Figure 55 Power/Gain- P25 Ph1 C4FM Output set below threshold-Secondary Amp	76
Figure 55 Power/Gain-P25 Ph1 C4FM input set above threshold.....	77
Figure 55 Power/Gain- P25 Ph1 C4FM Output set above threshold-Primary Amp.....	78
Figure 55 Power/Gain- P25 Ph1 C4FM Output set above threshold-Secondary Amp	79
Figure 55 Power/Gain-P25 Ph1 CQPSK input set below threshold	80
Figure 55 Power/Gain- P25 Ph1 CQPSK Output set below threshold-Primary Amp	81
Figure 55 Power/Gain- P25 Ph1 CQPSK Output set below threshold-Secondary Amp	82
Figure 55 Power/Gain-P25 Ph1 CQPSK input set above threshold	83
Figure 55 Power/Gain- P25 Ph1 CQPSK Output set above threshold-Primary Amp	84
Figure 55 Power/Gain- P25 Ph1 CQPSK Output set above threshold-Secondary Amp	85
Figure 55 Power/Gain-P25 Ph2 HDQPSK input set below threshold	86
Figure 55 Power/Gain- P25 Ph2 HDQPSK Output set below threshold-Primary Amp.....	87
Figure 55 Power/Gain- P25 Ph2 HDQPSK Output set below threshold-Secondary Amp	88
Figure 55 Power/Gain-P25 Ph2 HDQPSK input set above threshold	89
Figure 55 Power/Gain- P25 Ph2 HDQPSK Output set above threshold-Primary Amp	90
Figure 55 Power/Gain- P25 Ph2 HDQPSK Output set above threshold-Secondary Amp	91
Figure 56: Intermod, 769-775MHz Band, 12.5kHz, Input below AGC	95
Figure 57: Intermod, 769-775MHz Band, 12.5kHz, Primary Amp, Input below AGC	96

Figure 58: Intermod, 769-775MHz Band, 12.5kHz, Secondary Amp, Input below AGC	97
Figure 59: Intermod, 769-775MHz Band, 12.5kHz, Input above AGC	98
Figure 60: Intermod, 769-775MHz Band, 12.5kHz, Primary Amp, Input above AGC	99
Figure 61: Intermod, 769-775MHz Band, 12.5kHz, Secondary Amp, Input above AGC	100
Figure 62: Intermod, 769-775MHz Band, 25kHz, Input below AGC	101
Figure 63: Intermod, 769-775MHz Band, 25kHz, Primary Amp, Input below AGC	102
Figure 64: Intermod, 769-775MHz Band, 25kHz, Secondary Amp, Input below AGC	103
Figure 65: Intermod, 769-775MHz Band, 25kHz, Input above AGC	104
Figure 66: Intermod, 769-775MHz Band, 25kHz, Primary Amp, Input above AGC	105
Figure 67: Intermod, 769-775MHz Band, 25kHz, Secondary Amp, Input above AGC	106
Figure 68: Conducted Spurious 769-775MHz, Primary Amp, Low Channel 30-400MHz.....	108
Figure 69: Conducted Spurious 769-775MHz, Primary Amp, Low Channel 400-800MHz.....	109
Figure 70: Conducted Spurious 769-775MHz, Primary Amp, Low Channel 800-1000MHz....	110
Figure 71: Conducted Spurious 769-775MHz, Primary Amp, Low Channel 1-4GHz	111
Figure 72: Conducted Spurious 769-775MHz, Primary Amp, Low Channel 4-8GHz	112
Figure 73: Conducted Spurious 769-775MHz, Primary Amp, Center Channel 30-400MHz	113
Figure 74: Conducted Spurious 769-775MHz, Primary Amp, Center Channel 400-800MHz ..	114
Figure 75: Conducted Spurious 769-775MHz, Primary Amp, Center Channel 800-1000MHz	115
Figure 76: Conducted Spurious 769-775MHz, Primary Amp, Center Channel 1-4GHz	116
Figure 77: Conducted Spurious 769-775MHz, Primary Amp, Center Channel 4-8GHz	117
Figure 78: Conducted Spurious 769-775MHz, Primary Amp, High Channel 30-400MHz	118
Figure 79: Conducted Spurious 769-775MHz, Primary Amp, High Channel 400-800MHz	119
Figure 80: Conducted Spurious 769-775MHz, Primary Amp, High Channel 800-1000MHz ...	120
Figure 81: Conducted Spurious 769-775MHz, Primary Amp, High Channel 1-4GHz.....	121
Figure 82: Conducted Spurious 769-775MHz, Primary Amp, High Channel 4-8GHz.....	122
Figure 83: Conducted Spurious 769-775MHz, Secondary Amp, Low Channel 30-400MHz....	123
Figure 84: Conducted Spurious 769-775MHz, Secondary Amp, Low Channel 400-800MHz..	124
Figure 85: Conducted Spurious 769-775MHz, Secondary Amp, Low Channel 800-1000MHz	125
Figure 86: Conducted Spurious 769-775MHz, Secondary Amp, Low Channel 1-4GHz	126
Figure 87: Conducted Spurious 769-775MHz, Secondary Amp, Low Channel 4-8GHz	127
Figure 88: Conducted Spurious 769-775MHz, Secondary Amp, Center Channel 30-400MHz	128
Figure 89: Conducted Spurious 769-775MHz, Secondary Amp, Center Channel 400-800MHz	129
Figure 90: Conducted Spurious 769-775MHz, Secondary Amp, Center Channel 800-1000MHz	130
Figure 91: Conducted Spurious 769-775MHz, Secondary Amp, Center Channel 1-4GHz	131
Figure 92: Conducted Spurious 769-775MHz, Secondary Amp, Center Channel 4-8GHz	132
Figure 93: Conducted Spurious 769-775MHz, Secondary Amp, High Channel 30-400MHz ...	133
Figure 94: Conducted Spurious 769-775MHz, Secondary Amp, High Channel 400-800MHz .	134
Figure 95: Conducted Spurious 769-775MHz, Secondary Amp, High Channel 800-1000MHz	135
Figure 96: Conducted Spurious 769-775MHz, Secondary Amp, High Channel 1-4GHz.....	136
Figure 97: Conducted Spurious 769-775MHz, Secondary Amp, High Channel 4-8GHz.....	137

1 Introduction

1.1 Compliance Statement

The Applied Micro Design Inc. 1456 FFDPA-700 amplifier was tested to the requirements of Part 90.219 Private Land Mobile Radio Services Subpart I--Private Land Mobile Radio Services general technical requirements section of the FCC Rules and Regulations (10/2014). The device is a class B booster.

1.2 Test Scope

The following tests were performed using the applicable parts of the FCC rules and KDB 935210 D05 Indus Booster Basic Meas V01R01 (February 12, 2016) as guidance:

§ 90.219 General Technical Standards :Use of Signal Boosters

§ 90.210 General Technical Standards: Emission Masks

§ 90.543 Regulations Governing the Licensing and Use of Frequencies in the 763-775 and 793-805 MHz Bands

KDB 935210 DO5

Test Methods for PLMRS/PSRS Repeater/Amplifier and Industrial Booster Devices

1.3 Contract Information

Customer: Applied Micro Design Inc.
19516 Amaranth Drive
Germantown, MD, 20874

Purchase Order Number: 26100

Quotation Number: 69252A

1.4 Test Dates

Testing was performed on the following date(s): 2/17/2016- 8/17/2016

1.5 Test and Support Personnel

Washington Laboratories, LTD James Ritter

Customer Representative Stan Mantel

1.6 Abbreviations

A	Ampere
ac	alternating current
AM	Amplitude Modulation
Amps	Ampères
b/s	bits per second
BW	BandWidth
CE	Conducted Emission
cm	centimeter
CW	Continuous Wave
dB	deciBel
dc	direct current
EMI	Electromagnetic Interference
EUT	Equipment Under Test
FM	Frequency Modulation
G	giga - prefix for 10^9 multiplier
Hz	Hertz
IF	Intermediate Frequency
k	kilo - prefix for 10^3 multiplier
LISN	Line Impedance Stabilization Network
M	Mega - prefix for 10^6 multiplier
m	meter
μ	micro - prefix for 10^{-6} multiplier
NB	Narrowband
QP	Quasi-Peak
RE	Radiated Emissions
RF	Radio Frequency
rms	root-mean-square
SN	Serial Number
S/A	Spectrum Analyzer
V	Volt

2 Equipment Under Test

2.1 EUT Identification & Description

The Applied Micro Design 1456 FFDPA-700 is a 700MHz band Amplifier used in an Industrial Booster system operating Class B for an in Tunnel wireless communications for Public Safety distribution. It consists of the frequency band 769 – 775MHz. This frequency range has a primary amplifier and a backup secondary amplifier. The amplifier output connects to a leaky coax antenna system. This device is only for the downlink part of the system (base station to inside tunnel). Only 1 system will be made for the City of San Francisco. The input to this amplifier is RF. The amplifier is limited not to exceed 40dBm.


Table 1: Device Summary

ITEM	DESCRIPTION
Manufacturer:	Applied Micro Design Inc.
FCC ID:	2AES2-1456FFDPA-700
Model:	1456 FFDPA-700
FCC Rule Parts:	§90.219
Frequency Range:	769-775MHz
Measured Maximum Output Power:	4.8W (36.84dBm)
Channel Occupied Bandwidth:	12.5 kHz, 25 kHz
Maximum number of input channel	50
Type of Information:	Voice
Antenna Connector	N
Antenna Type	Leaky Coax
Power Source & Voltage:	120Vac

2.2 Test Configuration

The 1456 FFDPA-700 was configured via a laptop/server that enabled/disabled the primary and secondary amp. These amps are contained in a single enclosure and are NOT enabled simultaneously. The AGC threshold was set in this program to 3200. An RF signal was sent to the input of the amplifier

The Test setup only tests the amplifiers in this system.

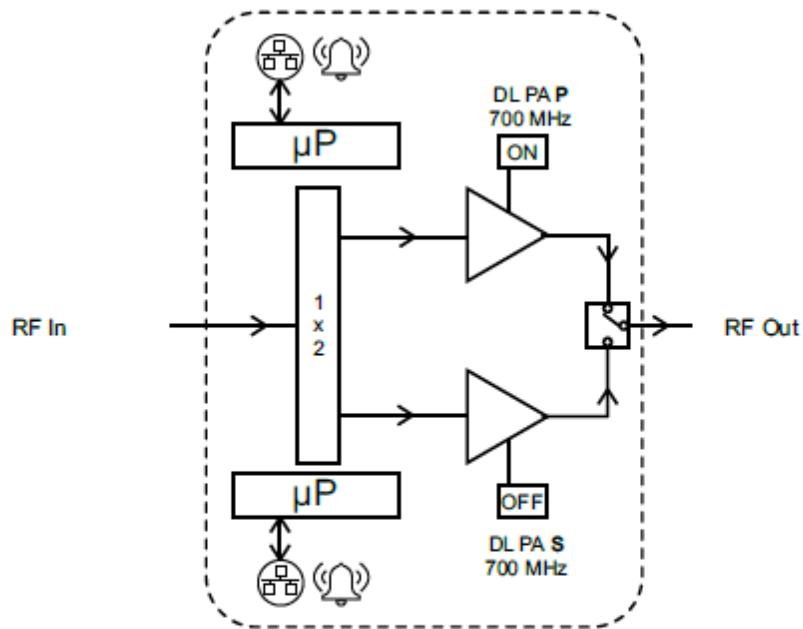

Model 1456FFDPA Product Block Diagram

Figure 1: Simplified Top Level Block Diagram

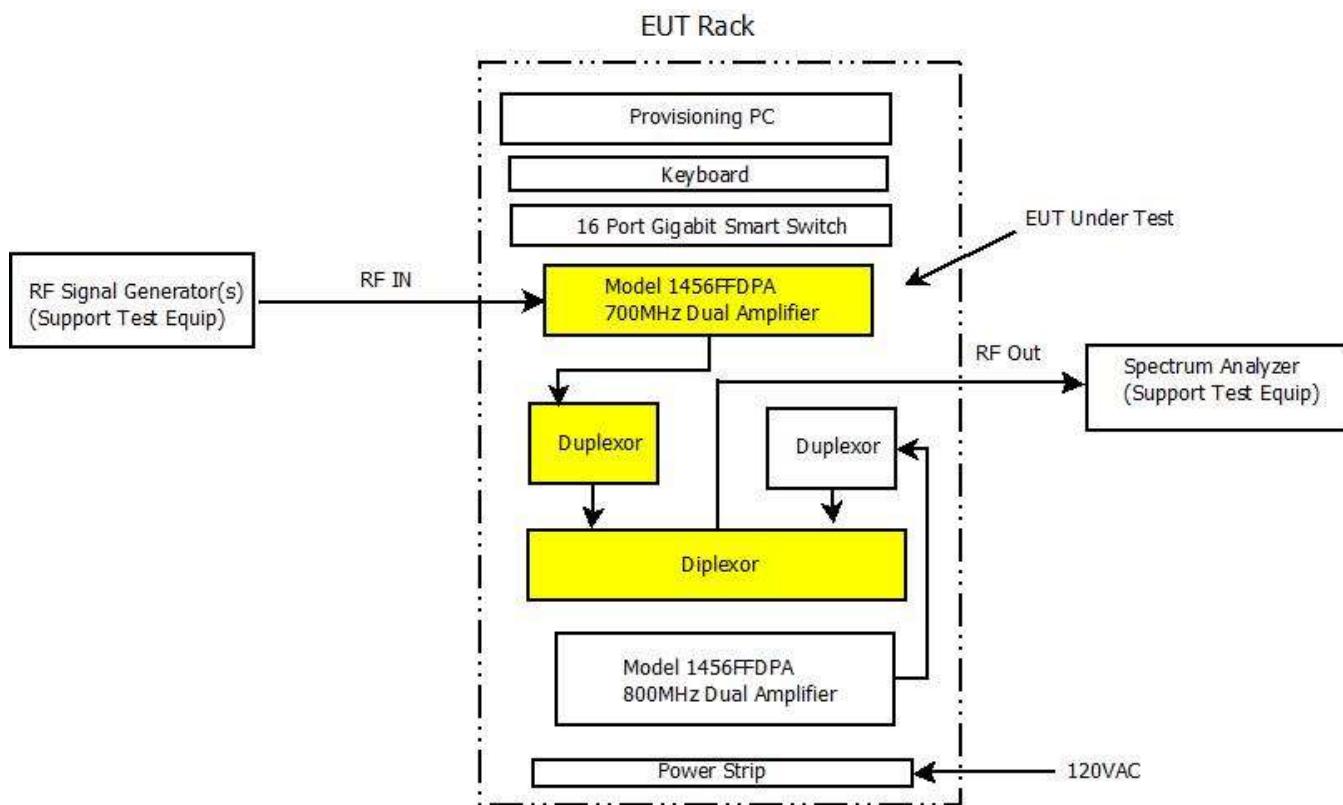


Figure 2: Test Block Diagram

2.3 Test Location

All measurements herein were performed at Washington Laboratories, Ltd. test center in Gaithersburg, MD. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. The Industry Canada OATS numbers are 3035A-1 and 3035A-2 for Washington Laboratories, Ltd. Site 1 and Site 2, respectively. Washington Laboratories, Ltd. has been accepted by the FCC and approved by ANAB under Certificate AT-1448 as an independent FCC test laboratory.

2.4 Measurement Uncertainty

All results reported herein relate only to the equipment tested. The basis for uncertainty calculation uses ANSI/NCSL Z540-2-1997 (R2002) with a type B evaluation of the standard uncertainty. Elements contributing to the standard uncertainty are combined using the method described in Equation 1 to arrive at the total standard uncertainty. The standard uncertainty is multiplied by the coverage factor to determine the expanded uncertainty which is generally accepted for use in commercial, industrial, and regulatory applications and when health and safety are concerned (see Equation 2). A coverage factor was selected to yield a 95% confidence in the uncertainty estimation.

Equation 1: Standard Uncertainty

$$u_c = \pm \sqrt{\frac{a^2}{div_a^2} + \frac{b^2}{div_b^2} + \frac{c^2}{div_c^2} + \dots}$$

Where u_c = standard uncertainty

a, b, c, \dots = individual uncertainty elements

$Div_{a, b, c}$ = the individual uncertainty element divisor based on the probability distribution

Divisor = 1.732 for rectangular distribution

Divisor = 2 for normal distribution

Divisor = 1.414 for trapezoid distribution

Equation 2: Expanded Uncertainty

$$U = k u_c$$

Where U = expanded uncertainty

k = coverage factor

$k \leq 2$ for 95% coverage (ANSI/NCSL Z540-2 Annex G)

u_c = standard uncertainty

The measurement uncertainty complies with the maximum allowed uncertainty from CISPR 16-4-2. Measurement uncertainty is not used to adjust the measurements to determine compliance. The expanded uncertainty values for the various scopes in the WLL accreditation are provided in Table 2 below.

Table 2: Expanded Uncertainty List

Scope	Standard(s)	Expanded Uncertainty
Conducted Emissions	CISPR11, CISPR22, CISPR14, FCC Part 15	± 2.63 dB
Radiated Emissions	CISPR11, CISPR22, CISPR14, FCC Part 15	± 4.55 dB

3 Test Equipment

Table 3 shows a list of the test equipment used for measurements along with the calibration information.

Table 3: Test Equipment List

Test Name: Bench & Radiated Emissions			
Asset #	Manufacturer/Model	Description	Cal. Due
528	AGILENT - E4446A	3HZ - 44GHZ ANALYZER SPECTRUM	7/15/2016
276	ELECTROMETRICS - BPA-1000	PRE-AMPLIFIER RF 50KHZ-1GHZ	9/18/2016
478	RHODE SCHWARZ - SMT 06	SIGNAL GENERATOR	7/22/2016
382	SUNOL SCIENCES CORPORATION - JB1	ANTENNA BICONLOG	8/31/2017
7	ARA - LPB-2520	ANTENNA BICONILOG ANTENNA	10/20/2017
4	ARA - DRG-118/A	ANTENNA DRG 1-18GHZ	10/8/2016
425	ARA - DRG-118/A	ANTENNA DRG 1-18GHZ	11/23/2017
522	HP - 8449B	PRE-AMPLIFIER 1-26.5GHZ	6/30/2016
803	R&S - SMR 40	SIGNAL GENERATOR 1 - 40GHZ	7/15/2017
823	AGILENT – N9010A	10HZ – 26.5GHZ ANALYZER SPECTRUM	8/23/2016
--	AEROFLEX 3920B	DIGITAL RADIO TEST SET	5/26/16
75	HP - 8648C	GENERATOR RF SIGNAL	9/16/2016

4 Test Results

4.1 EUT AGC Threshold (935210 DO5 section 4.2)

Procedure: KDB 935210 D05 Indus Booster Basic Meas V01R01: Section 4.2

Testing at and above the AGC threshold is required. The AGC threshold shall be determined by applying the procedure defined in 3.2 with the signal generator configured to produce either a test signal defined in Table 1 or a CW input signal, as appropriate. In Addition The following P25 modulations were tested: Phase 1 LSM, Phase 1 CQPSK, Phase 1 C4FM, & Phase 2 HDQPSK. The AGC was set to 3200 for testing.

Section 3.2 states:

- a) Connect a signal generator to the input of the EUT.
- b) Connect a spectrum analyzer or power meter to the output of the EUT using appropriate attenuation as necessary.
- c) The signal generator should initially be configured to produce either of the required test signals (i.e., broadband or narrowband).
- d) Set the signal generator frequency to the center frequency of the EUT operating band.
- e) While monitoring the output power of the EUT, measured using the methods of 3.5.3 or 3.5.4, increase the input level until a 1 dB increase in the input signal power no longer causes a 1 dB increase in the output signal power.
- f) Record this level as the AGC threshold level.

Each amplifier was connected to a signal generator set to the low, center, and high frequencies producing a CW (or P25) signal of the frequency under test. The output of the system was connected to the input of the spectrum analyzer through appropriate attenuation, with offsets set in the spectrum analyzer to compensate for the attenuation. The above procedure was followed. The results can be found in Table 4.

Table 4: AGC Threshold Level

769-775MHz Band

Amplifier	Frequency (MHz)	Measured AGC input (dBm)	Power Out (dBm)
Primary	769.26875	-4	35.41
Primary	771.66875	-4	35.55
Primary	774.64375	-4	35.51
Secondary	769.26875	-4	36.40
Secondary	771.66875	-4	36.35
Secondary	774.64375	-4	36.30

P25 Phase 1

LSM

Amplifier	Frequency (MHz)	Measured AGC input (dBm)	Power Out (dBm)
Primary	769.26875	-4	35.86
Primary	770.10625	-4	36.29
Primary	773.68125	-4	36.60
Secondary	769.26875	-4	36.20
Secondary	770.10625	-4	36.24
Secondary	773.68125	-4	36.60

P25 Phase 1

C4FM

Amplifier	Frequency (MHz)	Measured AGC input (dBm)	Power Out (dBm)
Primary	769.26875	-4	35.16
Primary	770.10625	-4	35.06
Primary	773.68125	-4	35.28
Secondary	769.26875	-4	36.60
Secondary	770.10625	-4	35.66
Secondary	773.68125	-4	35.85

P25 Phase 1

CQPSK

Amplifier	Frequency (MHz)	Measured AGC input (dBm)	Power Out (dBm)
Primary	769.26875	-4	36.84
Primary	770.10625	-4	36.64
Primary	773.68125	-4	36.81
Secondary	769.26875	-4	36.52
Secondary	770.10625	-4	36.68
Secondary	773.68125	-4	36.84

P25 Phase 2

HDQPSK

Amplifier	Frequency (MHz)	Measured AGC input (dBm)	Power Out (dBm)
Primary	769.26875	-4	36.10
Primary	770.10625	-4	36.44
Primary	773.68125	-4	36.90
Secondary	769.26875	-4	36.63
Secondary	770.10625	-4	36.03
Secondary	773.68125	-4	36.30

4.2 Out of Band Rejection (935210 DO5 section 4.3)

Section 4.3 Specifies the following procedure:

- a) Connect a signal generator to the input of the EUT.
- b) Configure a swept CW signal with the following parameters:
- c) Frequency range = $\pm 250\%$ of the manufacturer's pass band.
- d) The CW amplitude will be 3 dB below the AGC threshold (see 4.2) and but not activate the AGC threshold throughout the test.
- e) Dwell time = approx. 10 ms.
- f) Frequency step = 50 kHz.
- g) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- h) Set the resolution bandwidth of the spectrum analyzer between 1 % and 5 % of the manufacturer's pass band with the video bandwidth set to $3 \times$ RBW.
- i) Set the detector to Peak and the trace to Max-Hold.
- j) After the trace is completely filled, place a marker at the peak amplitude, which is designated as F_0 , and with two additional markers (use the marker-delta method) at the 20 dB bandwidth (i.e., at the points where the gain has fallen by 20 dB)

Table 5 provides the peak amplitude (F_0) as well as center frequency of the window (F_c), the low end of the frequency band (F_L), the high end of the frequency band (F_H) and the overall bandwidth of the window (B_w). See Figure 2 through Figure 12 for plots of the measurements.

Table 5: Out of Band Rejection

Amplifier	F_0 (MHz)	F_L (MHz)	F_H (MHz)	20 dB BW (MHz)
769-775MHz Primary	772.94000	762.47000	780.42000	17.95
769-775MHz Secondary	769.85000	762.82000	780.24000	17.42

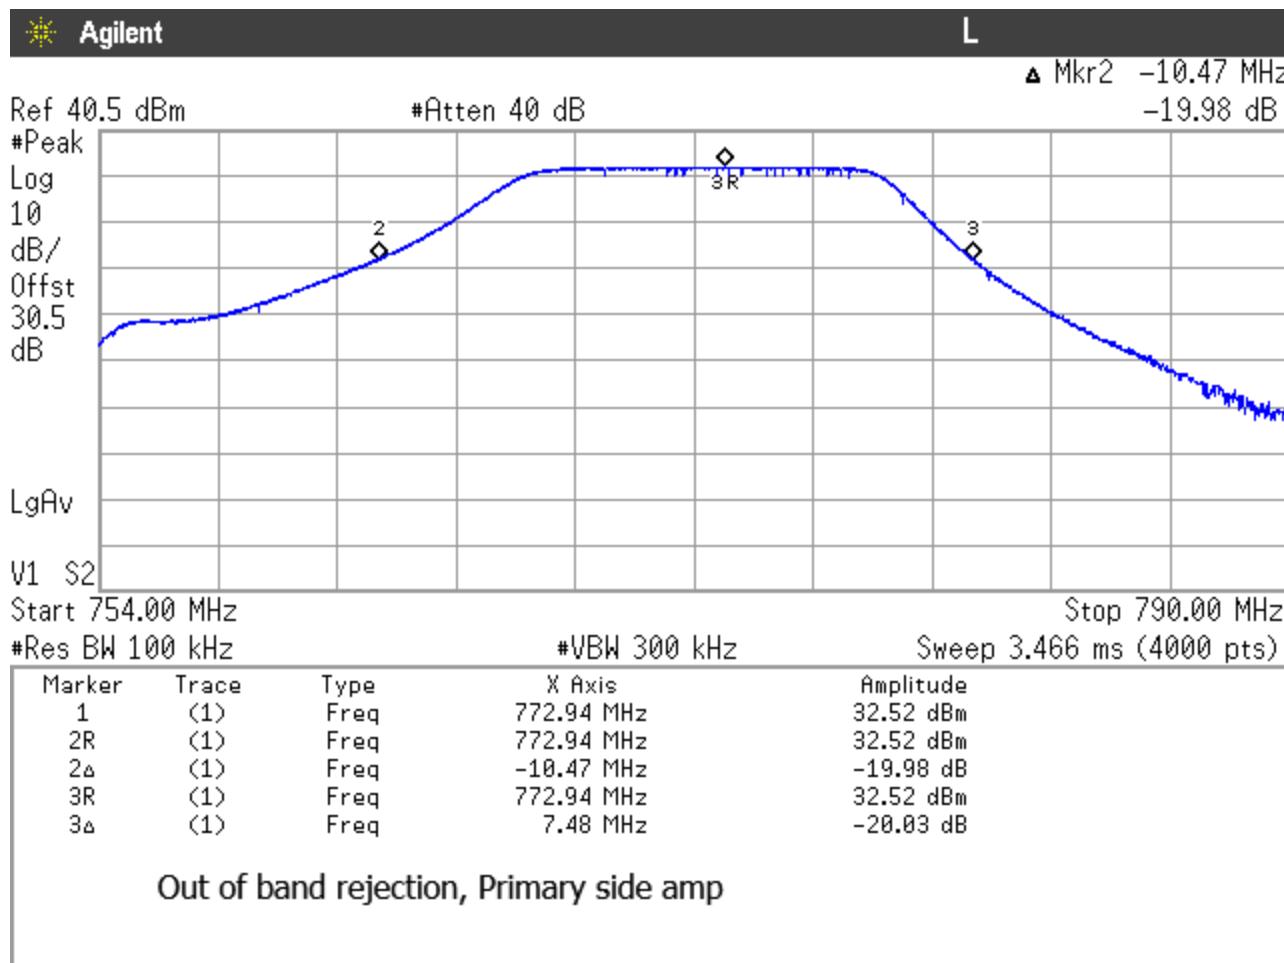


Figure 3: 769-775MHz Primary Amp Out of Band Rejection

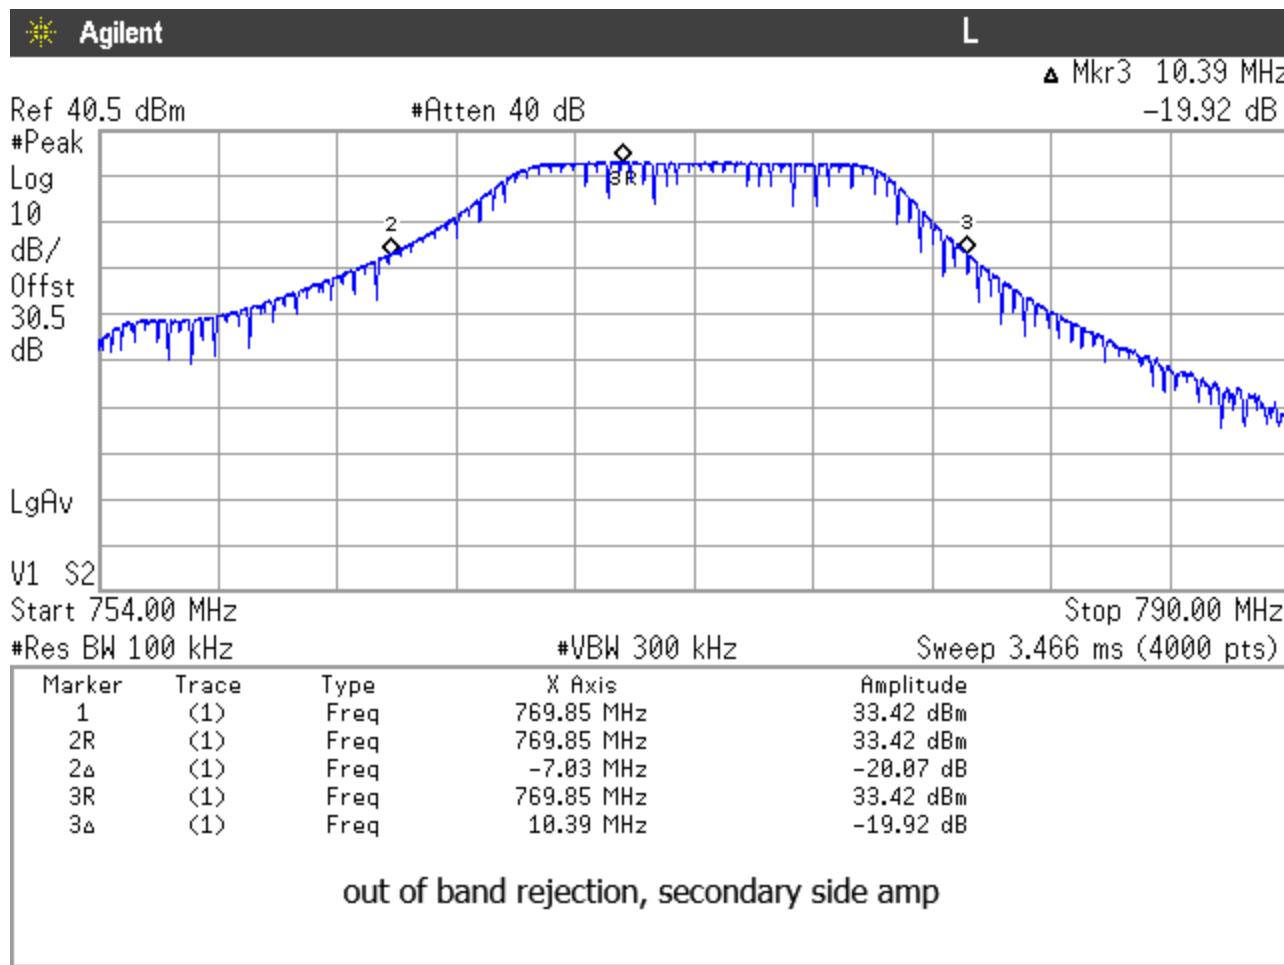


Figure 4: 769-775MHz Secondary Amp Out of Band Rejection

4.3 EUT input-versus-output signal comparison (935210 DO5 section 4.4)

Section 4.4 Specifies that the emissions mask of the EUT output shall be measured for the following public safety signal types

Table 6: Test Signals

Emission Designator	Modulation	Occupied Bandwidth	Channel Bandwidth	Audio Frequency
16K0F3E	FM	16 kHz	25 kHz	1 kHz
11K3F3E	FM	11.3 kHz	12.5 kHz	1 kHz
4K00F1E	FM	4 kHz	6.25 kHz	1 kHz
NA	CW	NA	NA	NA
NA	P25Ph1 LSM	NA	NA	NA
NA	P25 Ph1 C4FM	NA	NA	NA
NA	P25 Ph1 CQPSK	NA	NA	NA
NA	P25 Ph2 HDQPSK	NA	25 kHz	NA

The signal generator was configured to produce a FM (or P25) signal with the appropriate deviation that created a signal with the occupied bandwidths listed in Table 6.

Per Part 90.210 table for Applicable Emission Masks the following emissions masks apply:

Frequency Band (MHz)	Emission mask
769-775	C

This device does not have an audio low pass filter

The following procedure was used:

- a) Connect a signal generator to the input of the EUT.
- b) Configure the signal generator to transmit the appropriate test signal associated with the public safety emission designation (see Table 1).
- c) Configure the signal level to be just below the AGC threshold (see results from 4.2).
- d) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.
- e) Set the spectrum analyzer center frequency to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between 2 times to 5 times the EBW (or OBW).
- f) The nominal resolution bandwidth (RBW) shall 300 Hz for 16K0F3E and 100 Hz for all other emissions types.

- g) Set the reference level of the spectrum analyzer to accommodate the maximum input amplitude level.
- h) Set spectrum analyzer detection mode to peak, and trace mode to max hold. i) Allow the trace to fully stabilize.
- j) Confirm that the signal is contained within the appropriate emissions mask.
- k) Use the marker function to determine the maximum emission level and record the associated frequency as f_0 .
- l) Capture the emissions mask plot for inclusion in the test report (output signal spectra).
- m) Measure the EUT input signal power (signal generator output signal) directly from the signal generator using power measurement guidance provided in KDB Publication 971168 (input signal spectra).
- n) Compare the spectral plot of the output signal (determined in step k), to the input signal (determined in step l) to affirm they are similar.
- o) Repeat steps b) to n) for all authorized operational bands and emissions types (see applicable regulatory specifications, e.g., §90.210).
- p) Include all accumulated spectral plots depicting EUT input signal and EUT output signal in the test report and note any observed dissimilarities.

4.3.1 Results:

In all cases, the output matched the input with the exception of amplitude as would be expect in a booster. See Figure 5 through Figure 46 for the plots that support this conclusion.

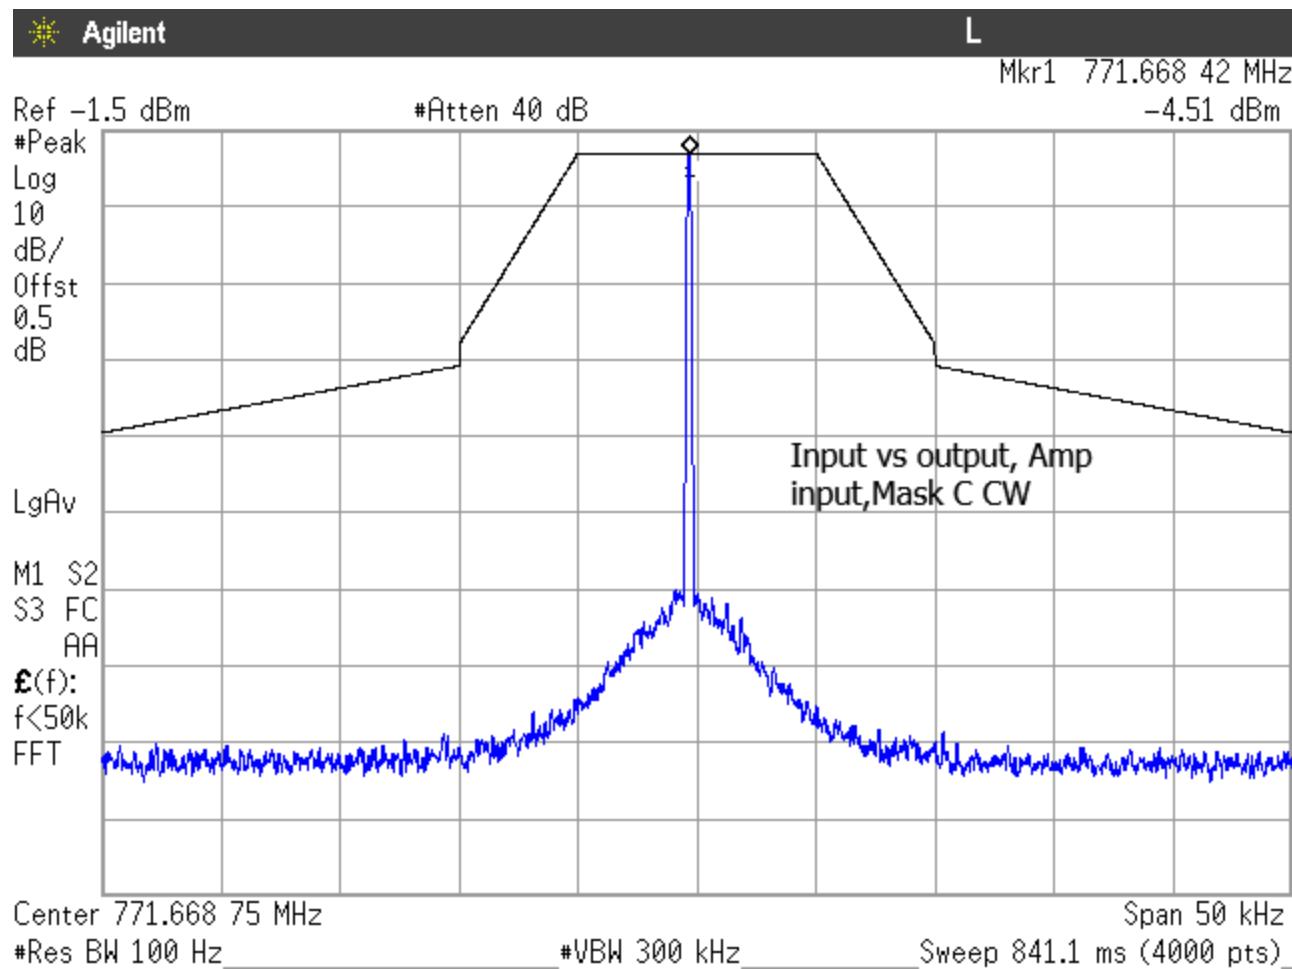


Figure 5: 769-775MHz signal comparison CW input

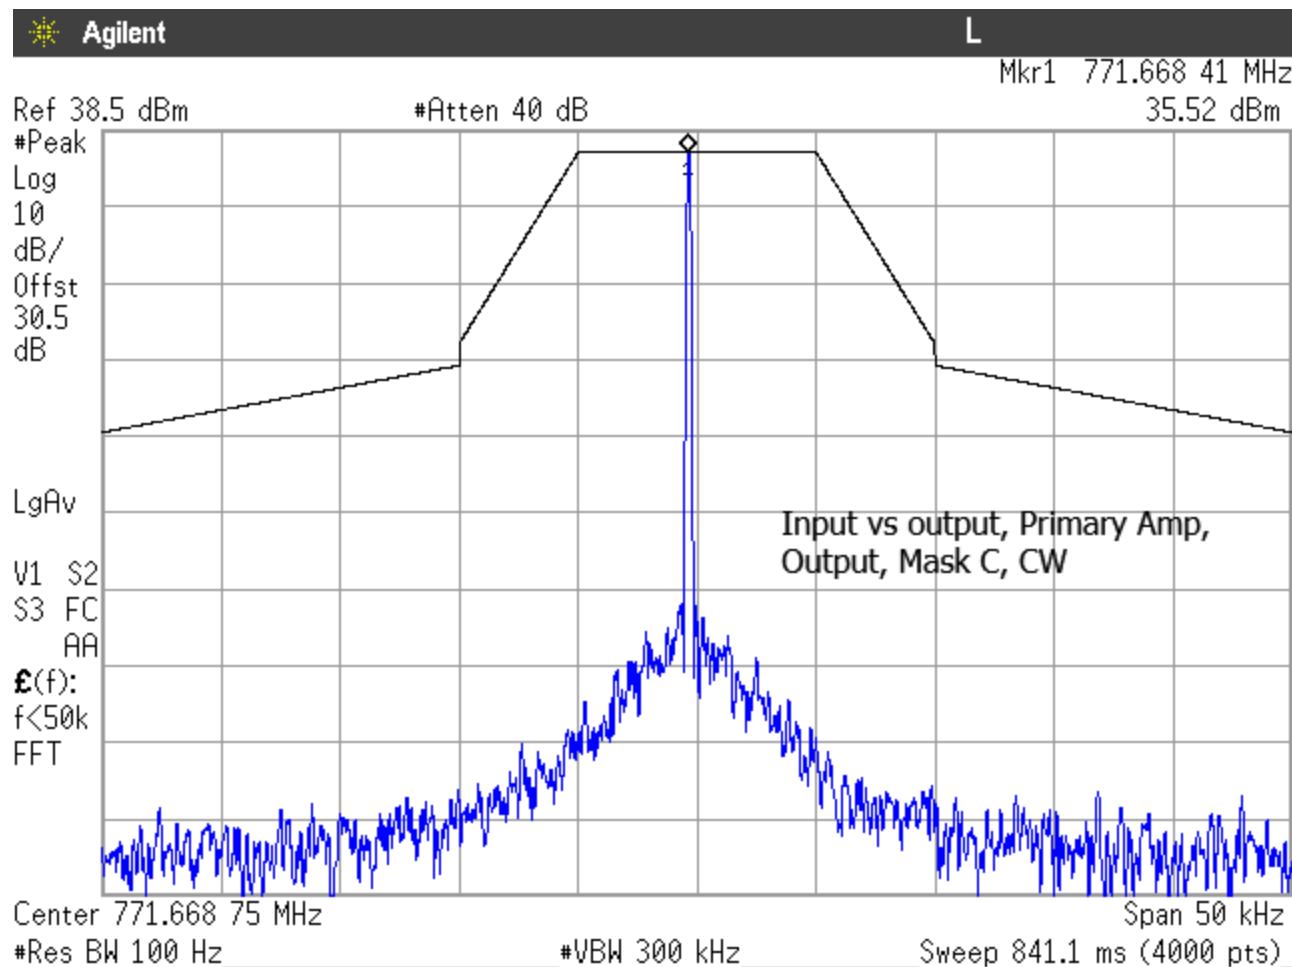


Figure 6: 769-775MHz comparison CW Output-Primary Amp

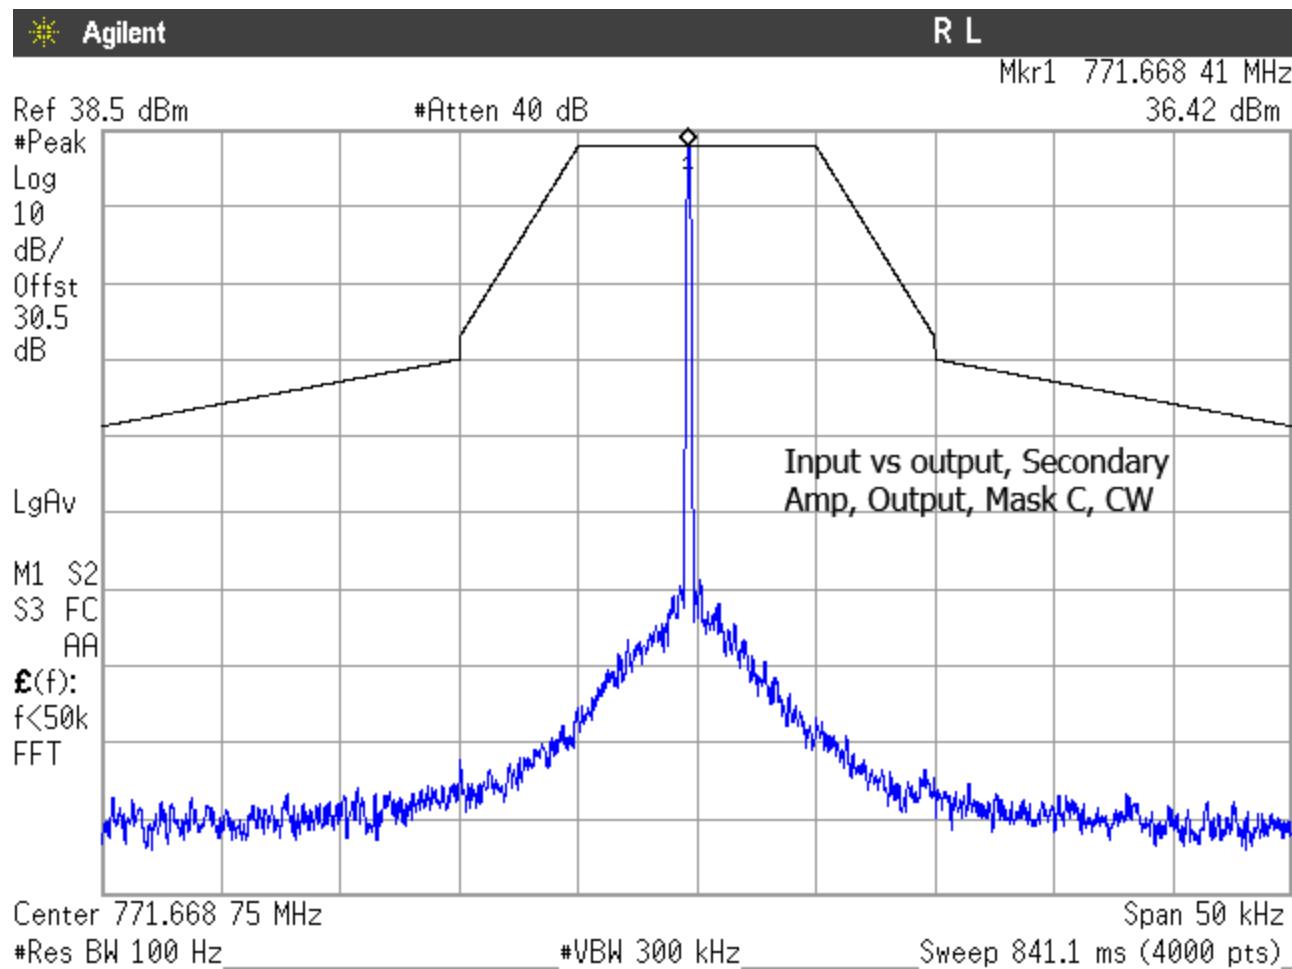


Figure 7: 769-775MHz comparison CW Output-Secondary Amp

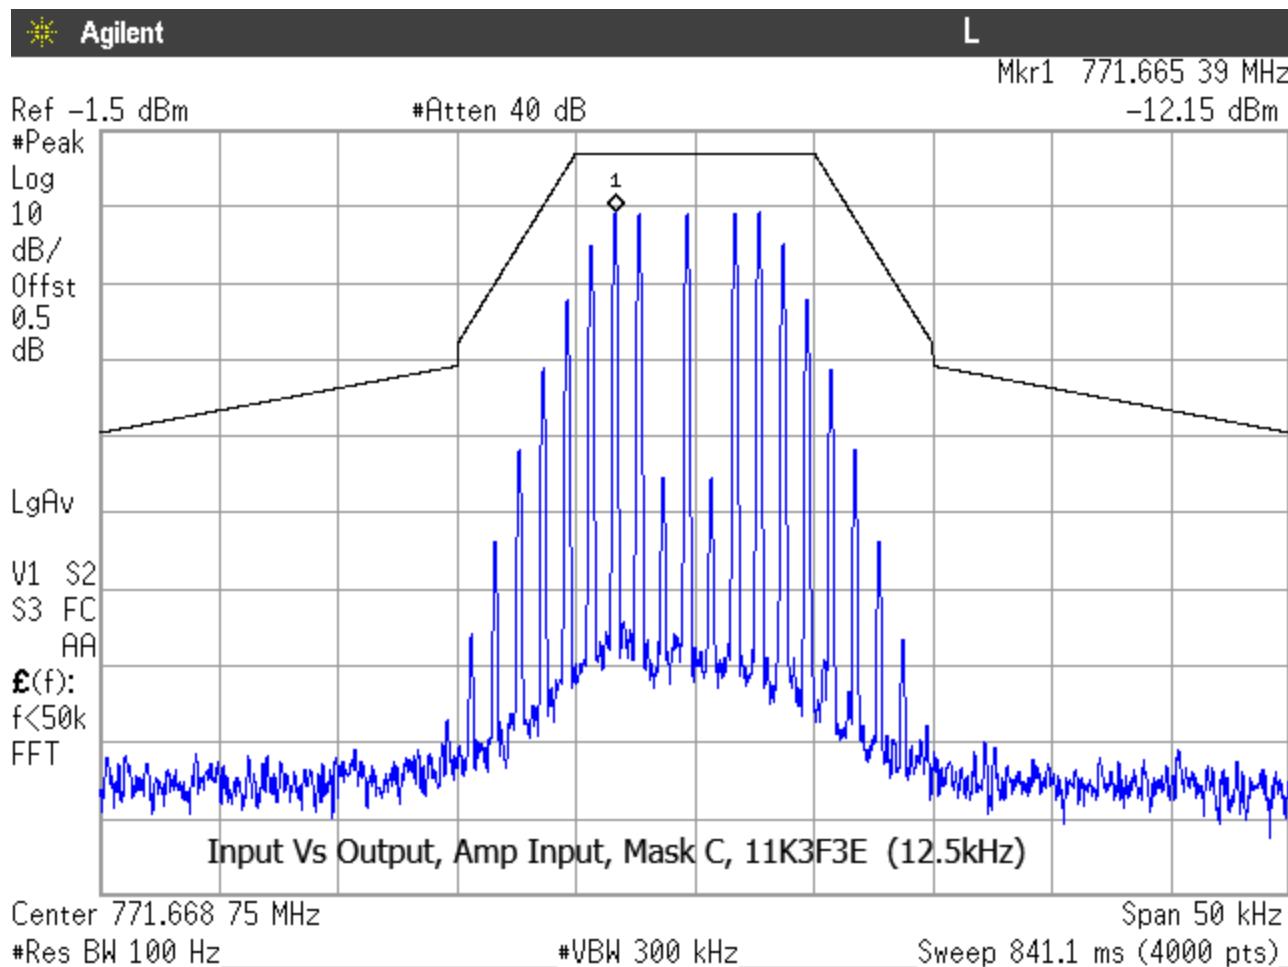


Figure 8: 769-775MHz comparison 11K3F3E input

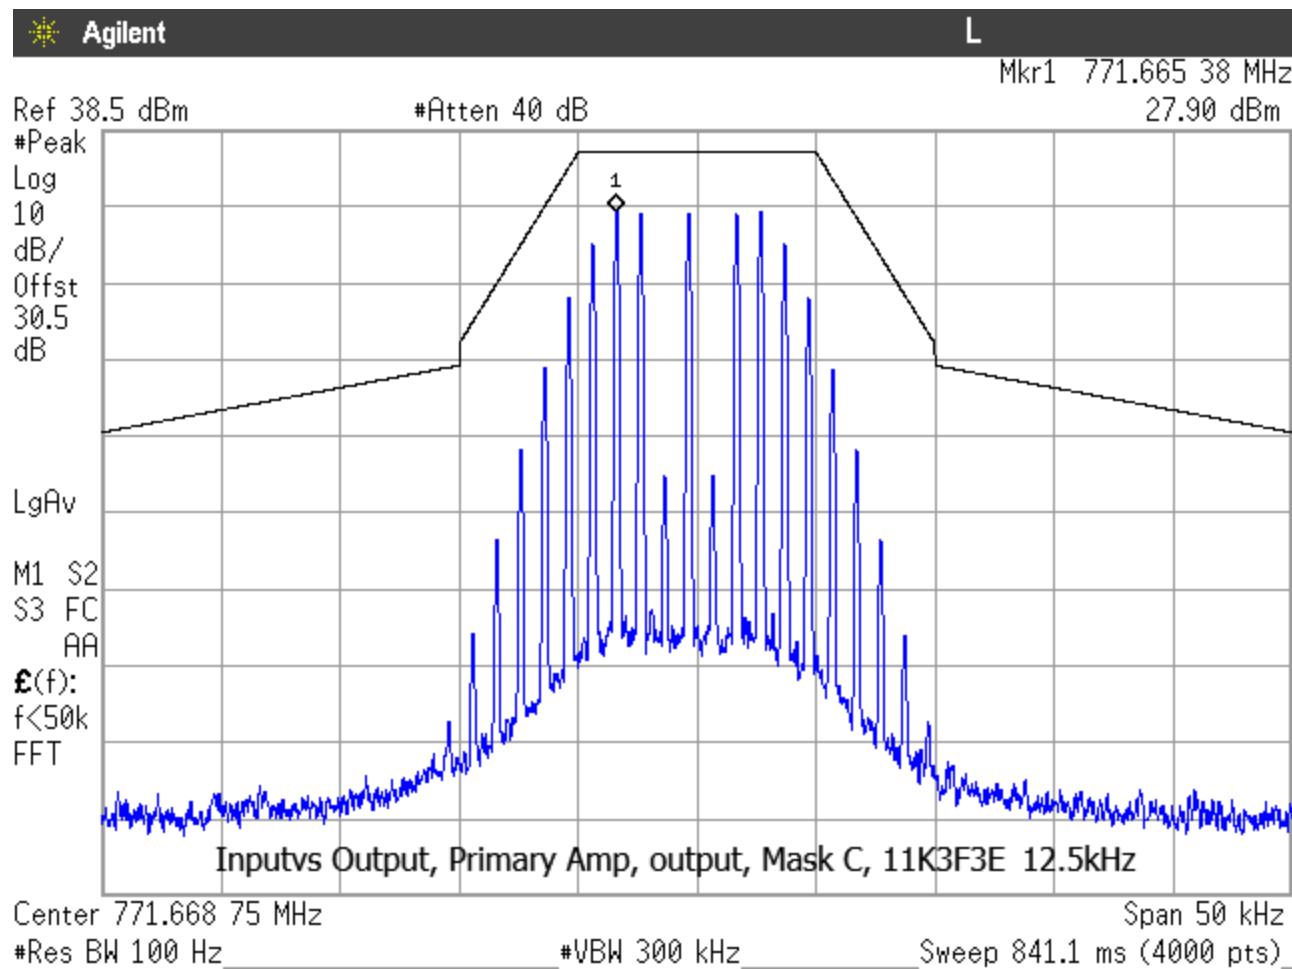


Figure 9: 769-775MHz comparison 11K3F3E Output-Primary Amp

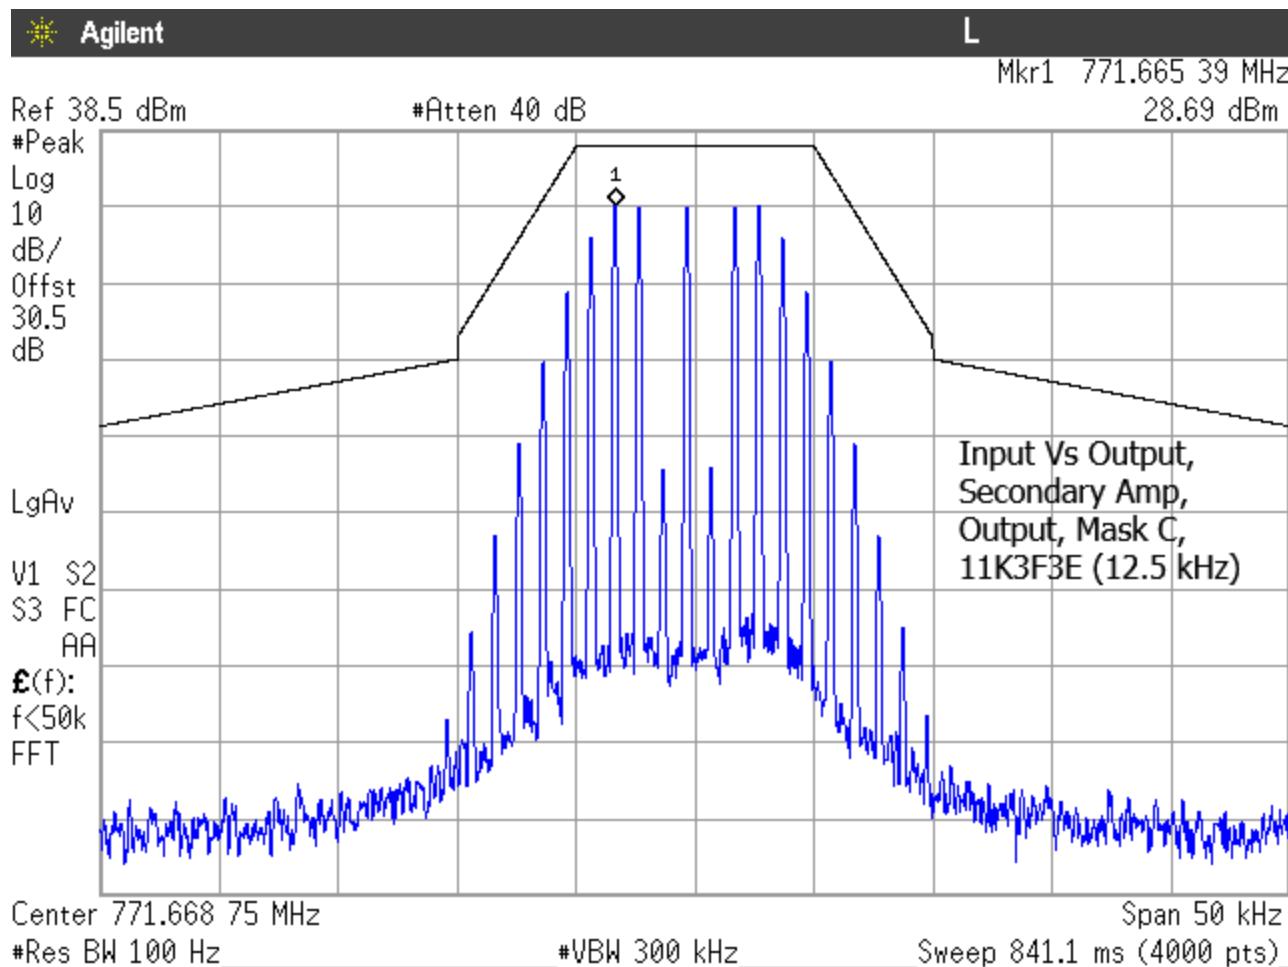


Figure 10: 769-775MHz comparison 11K3F3E Output-Secondary Amp

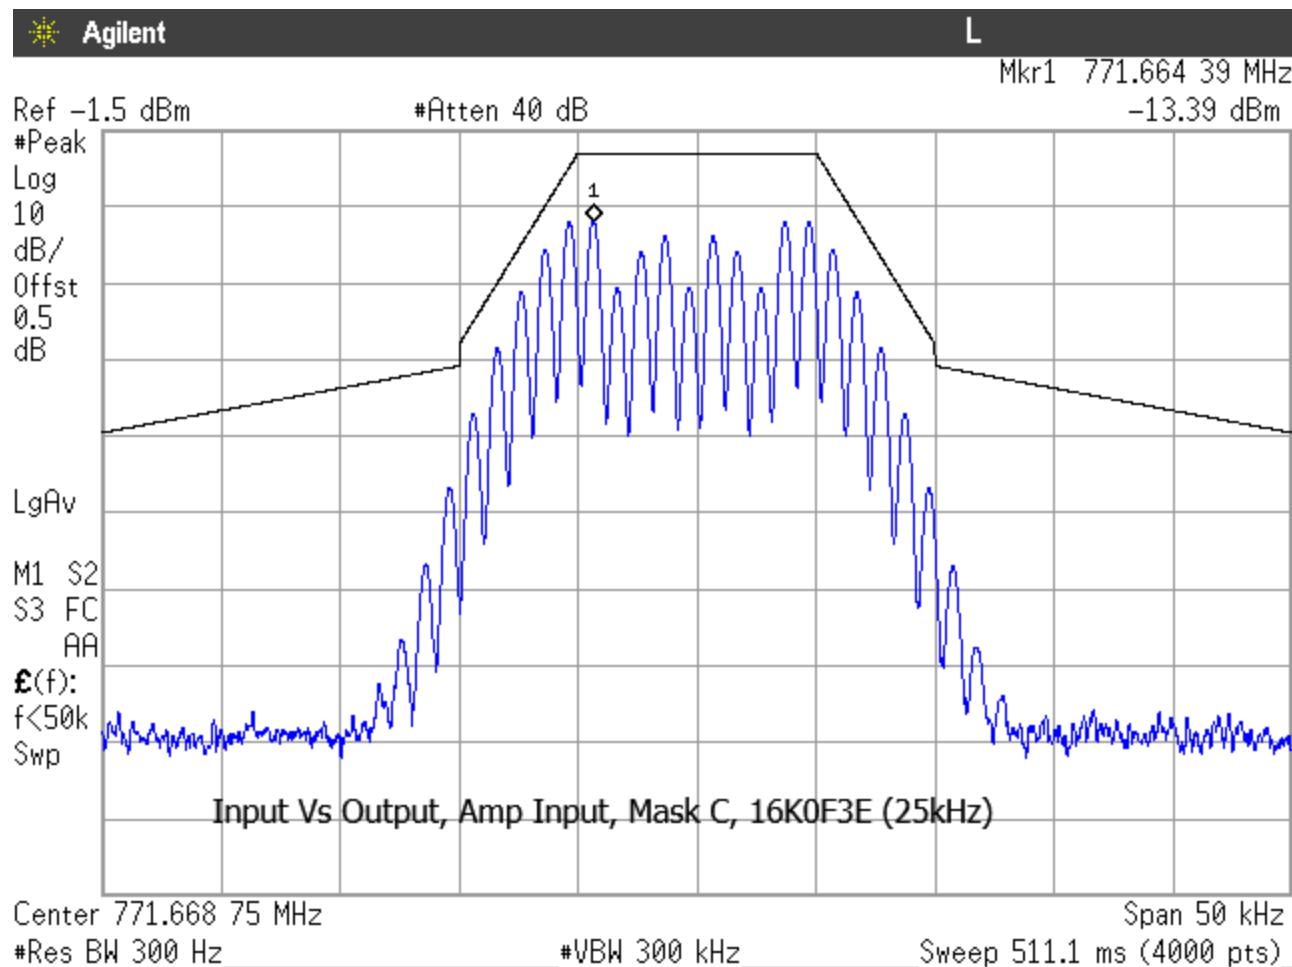


Figure 11: 769-775MHz comparison 16K0F3E input

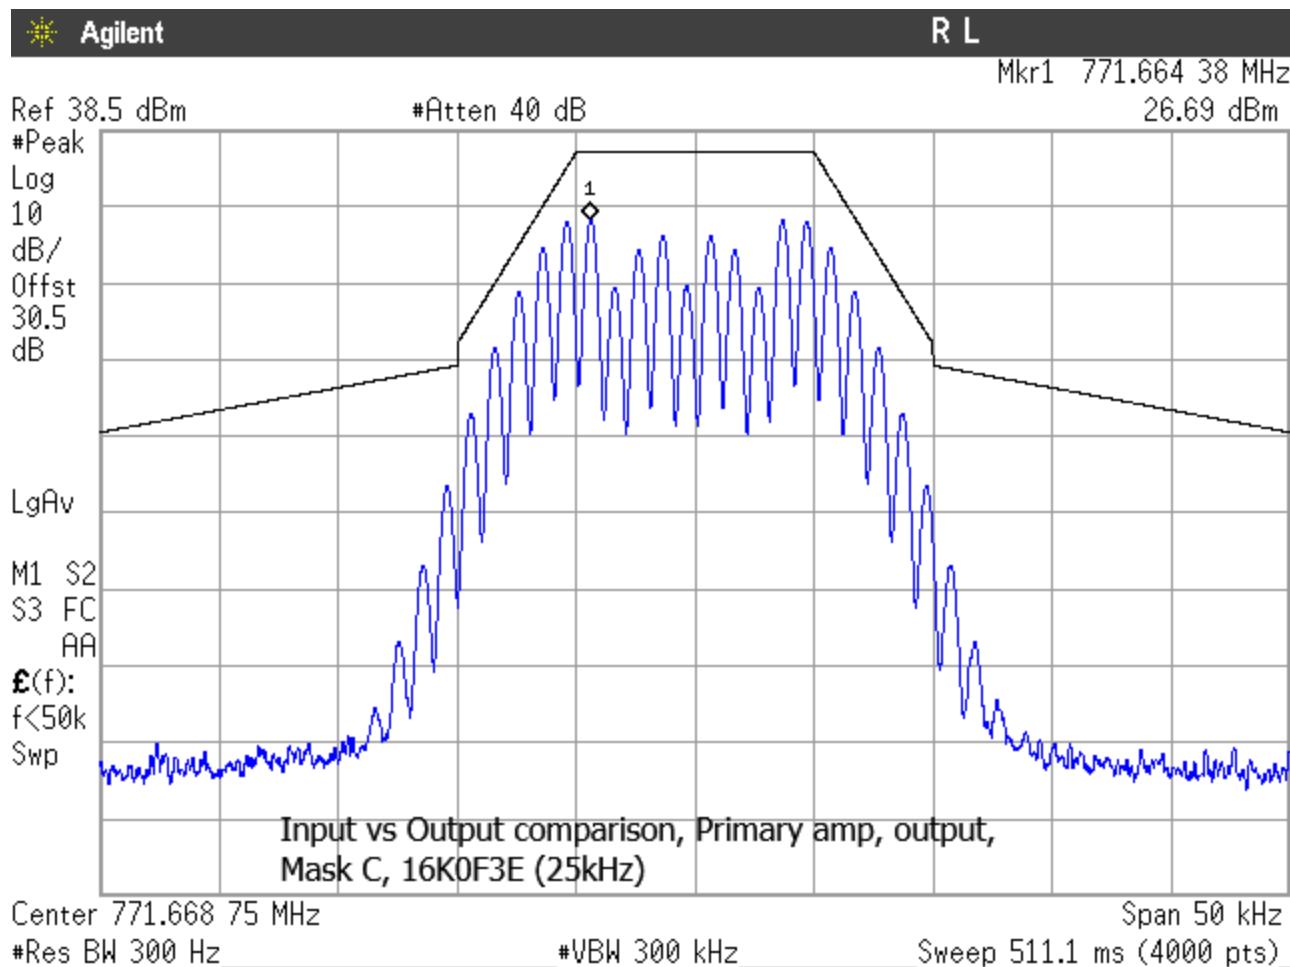


Figure 12: 769-775MHz comparison 16K0F3E Output- Primary Amp

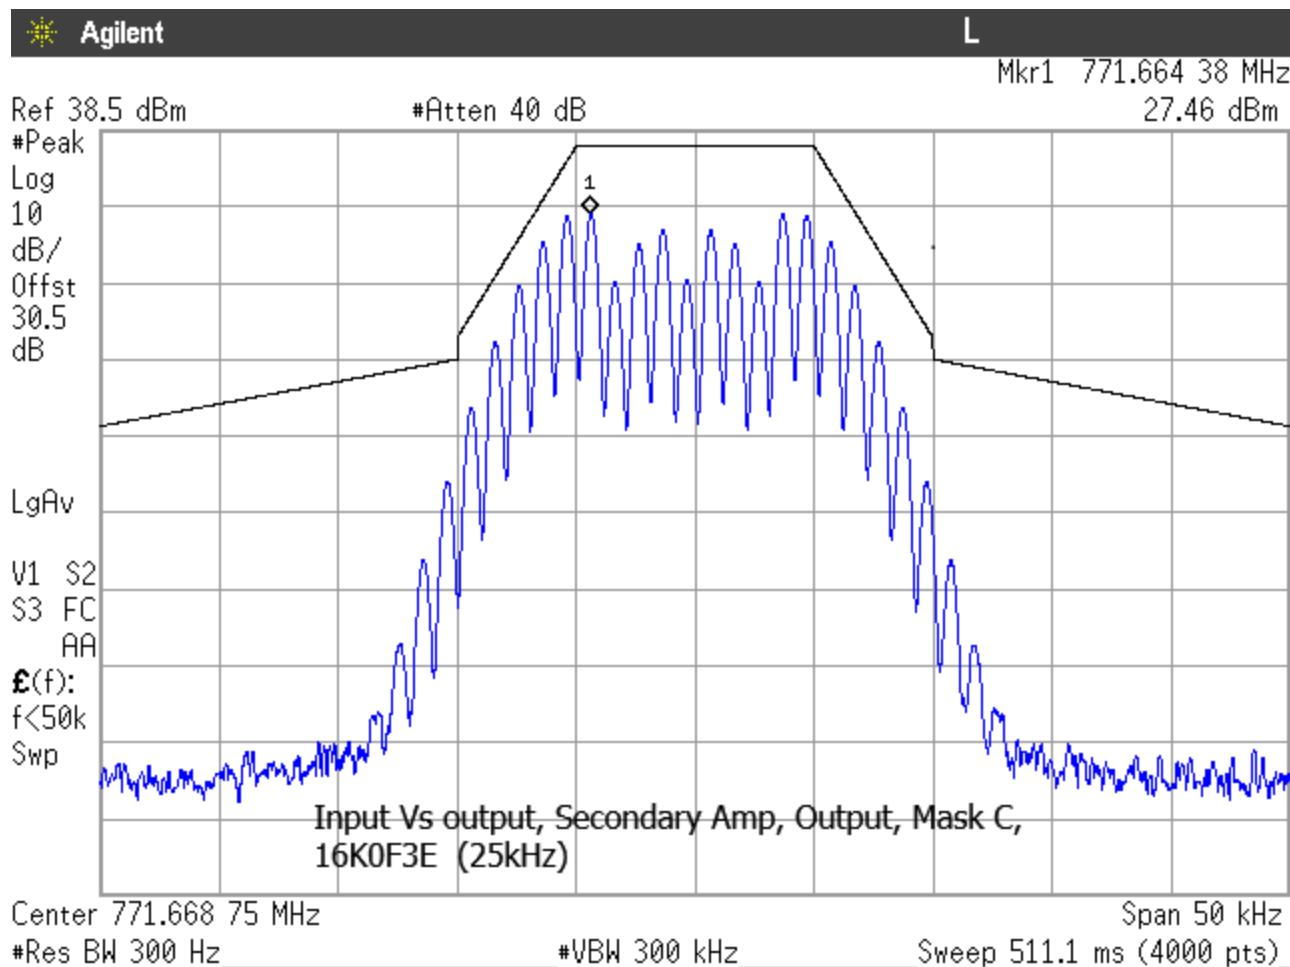


Figure 13: 769-775MHz comparison 16K0F3E Output- Secondary amp

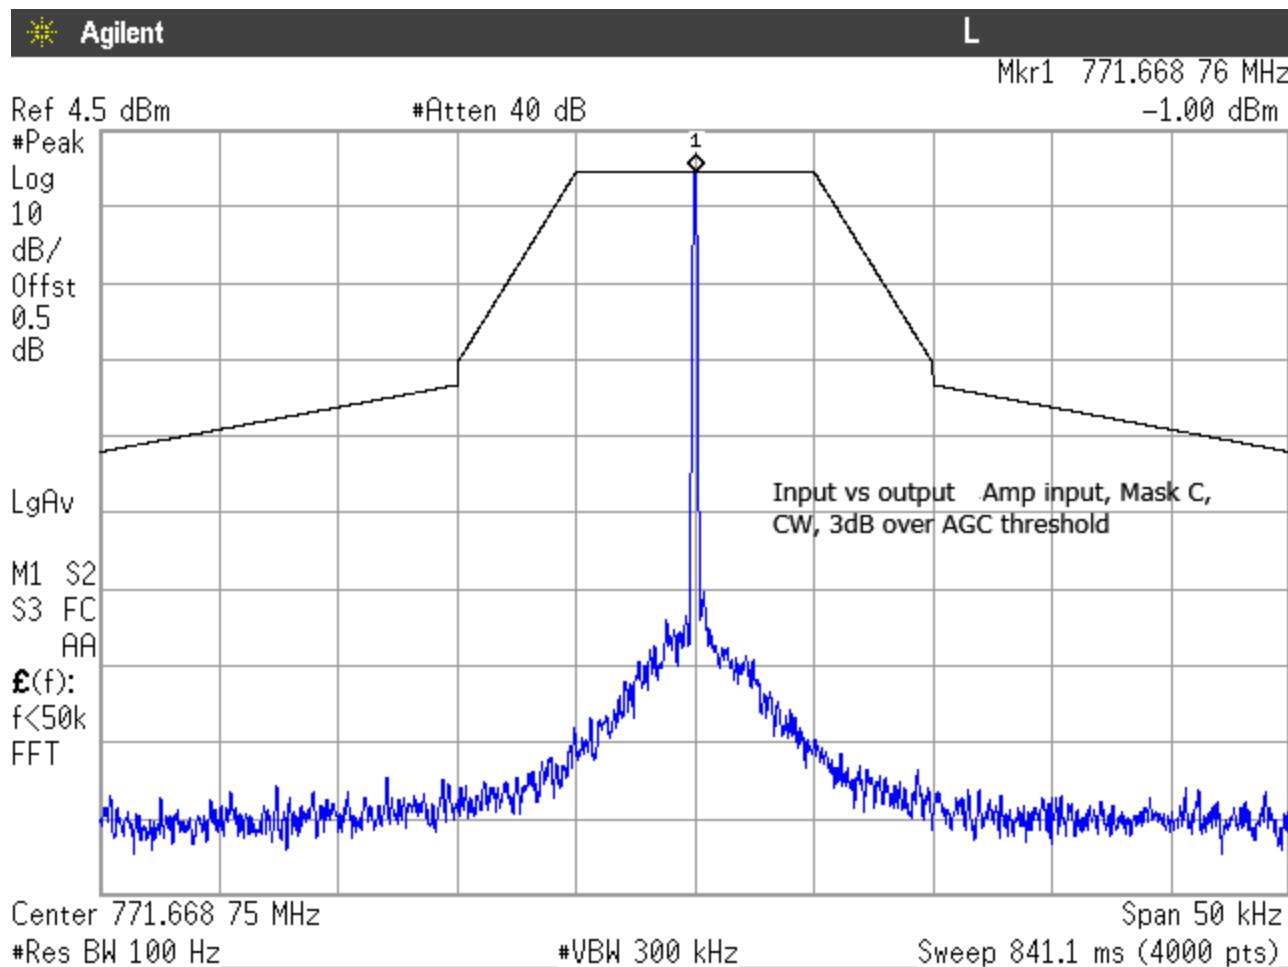


Figure 14: 769-775MHz comparison CW input, Level 3dB over AGC

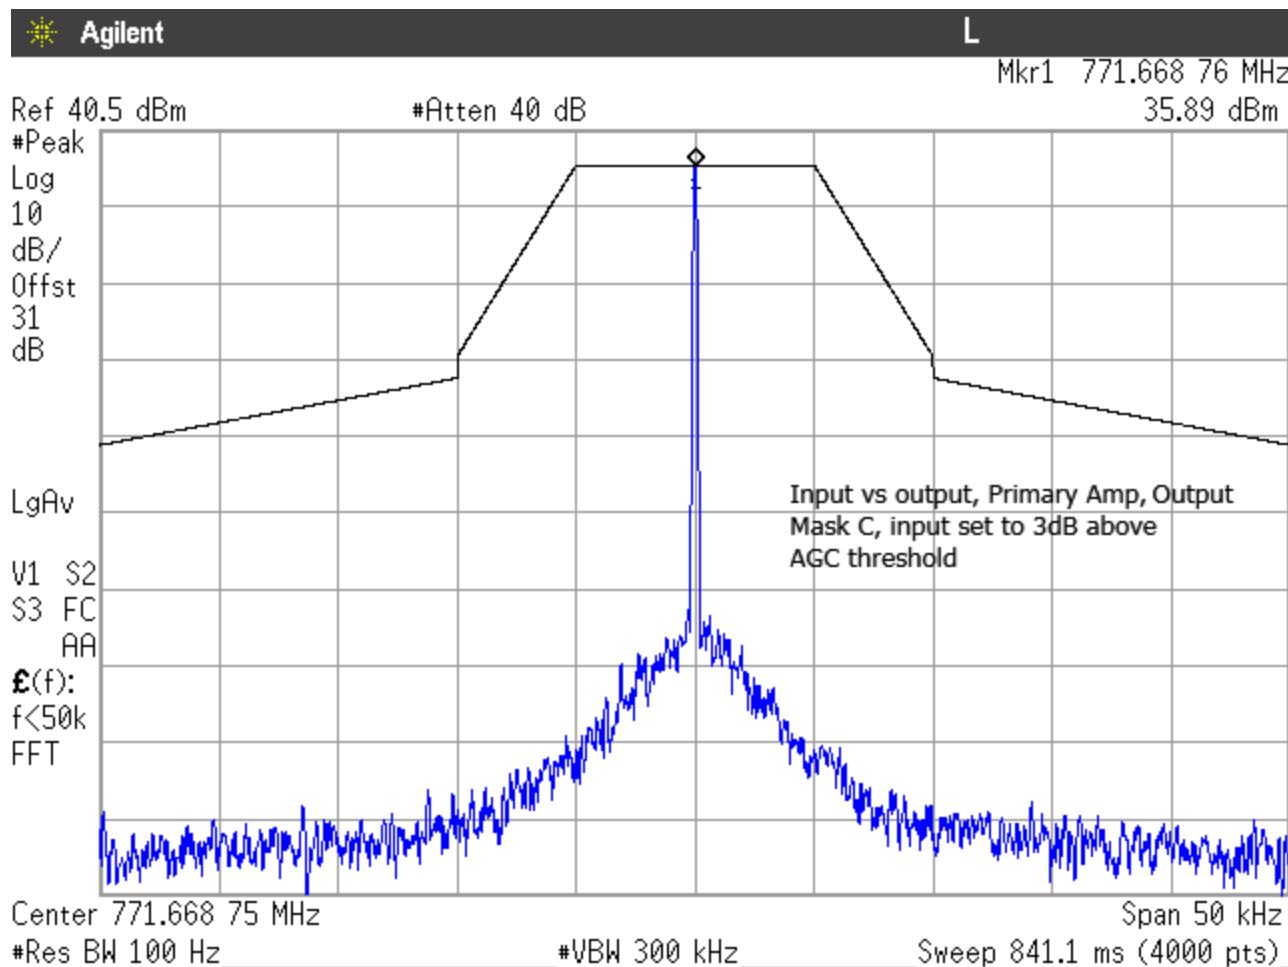


Figure 15: 769-775MHz comparison, CW Output, Mask C- Primary Amp, 3dB over AGC

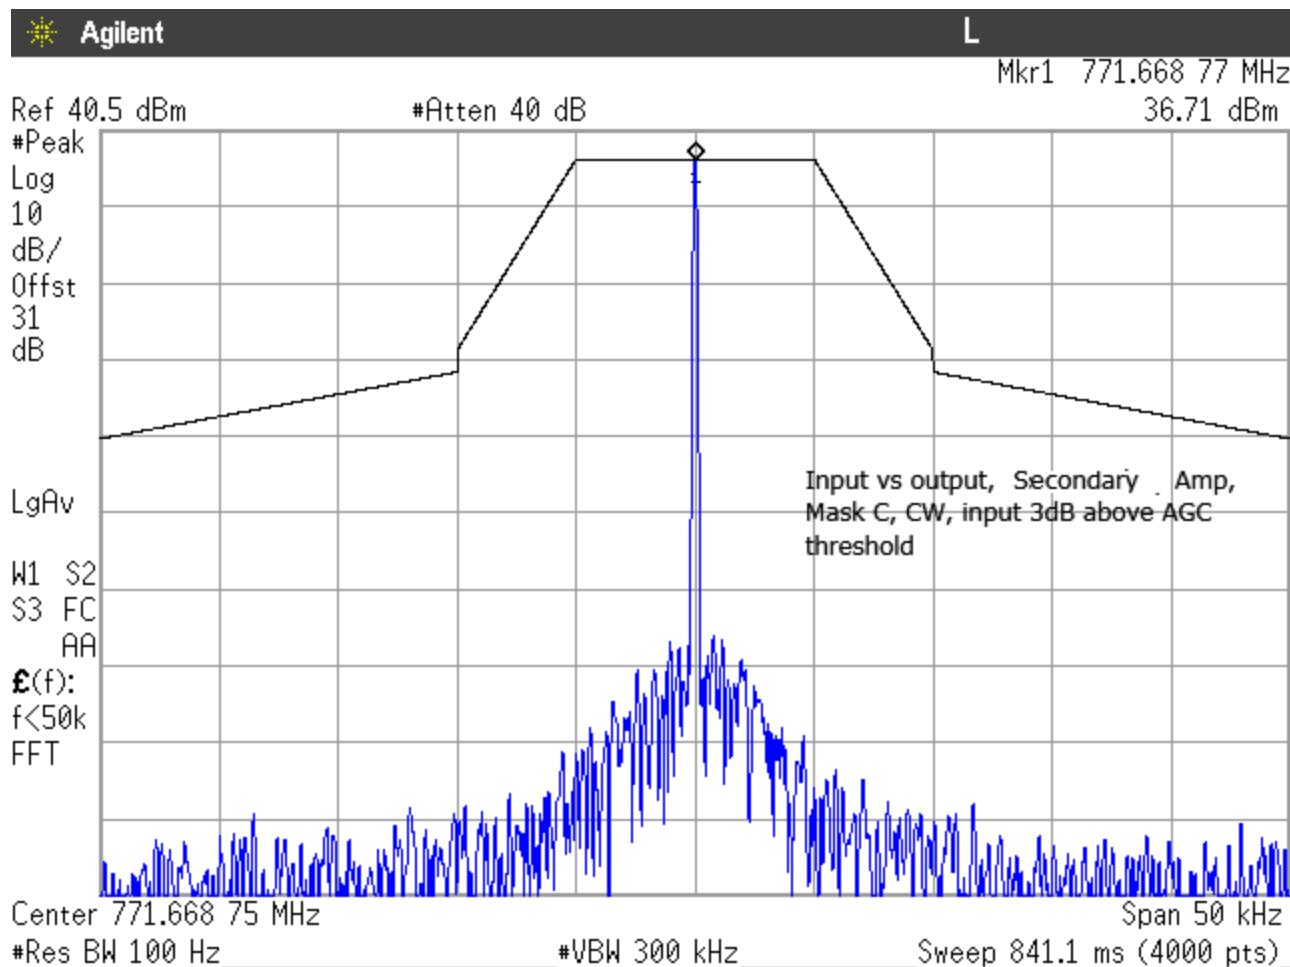


Figure 16: 769-775MHz comparison, CW Output, Mask C- Secondary Amp, 3dB over AGC

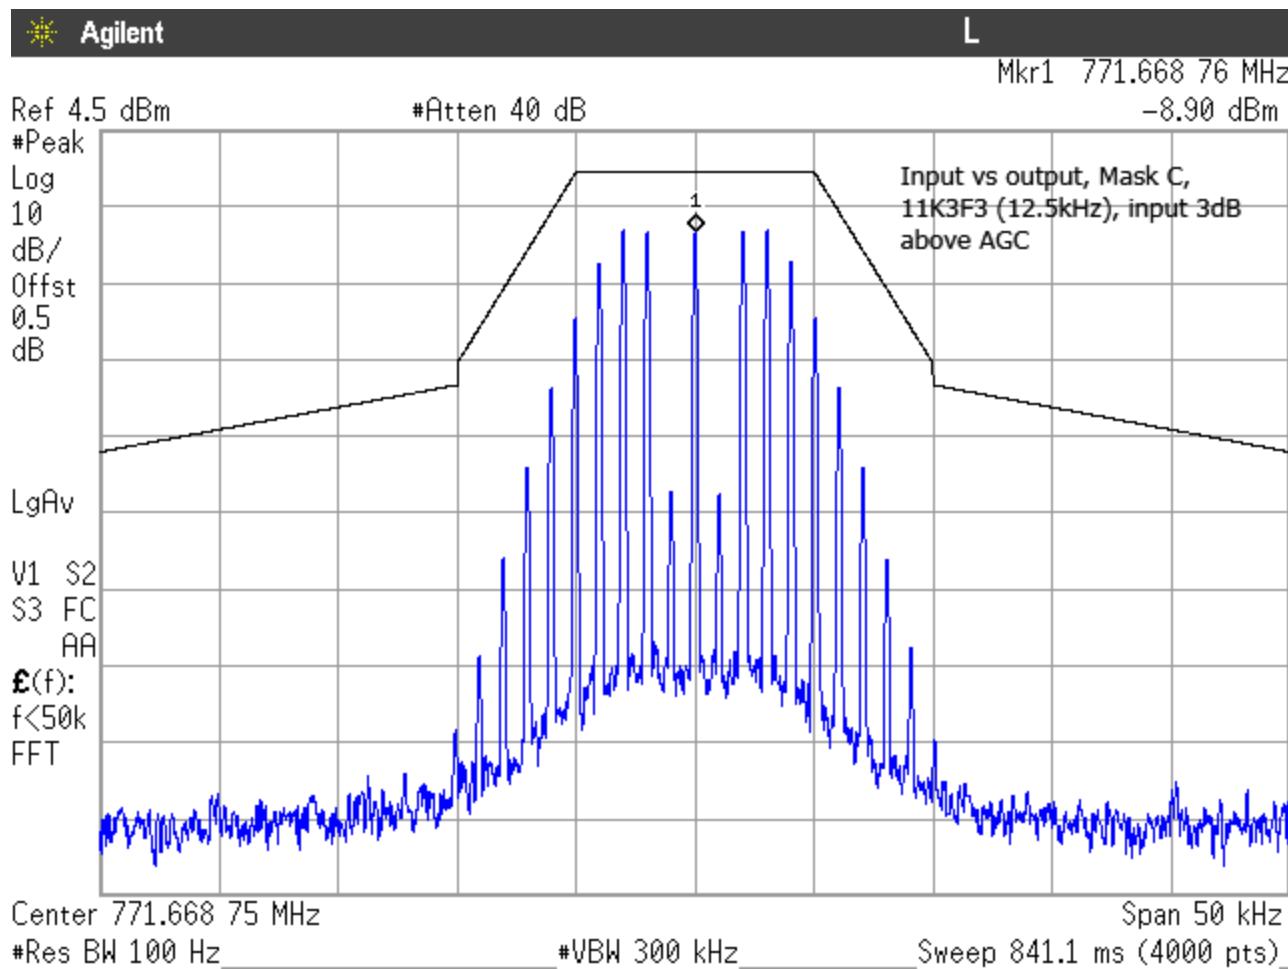


Figure 17: 769-775MHz comparison 11K3F3E input, Mask C, Level 3dB over AGC

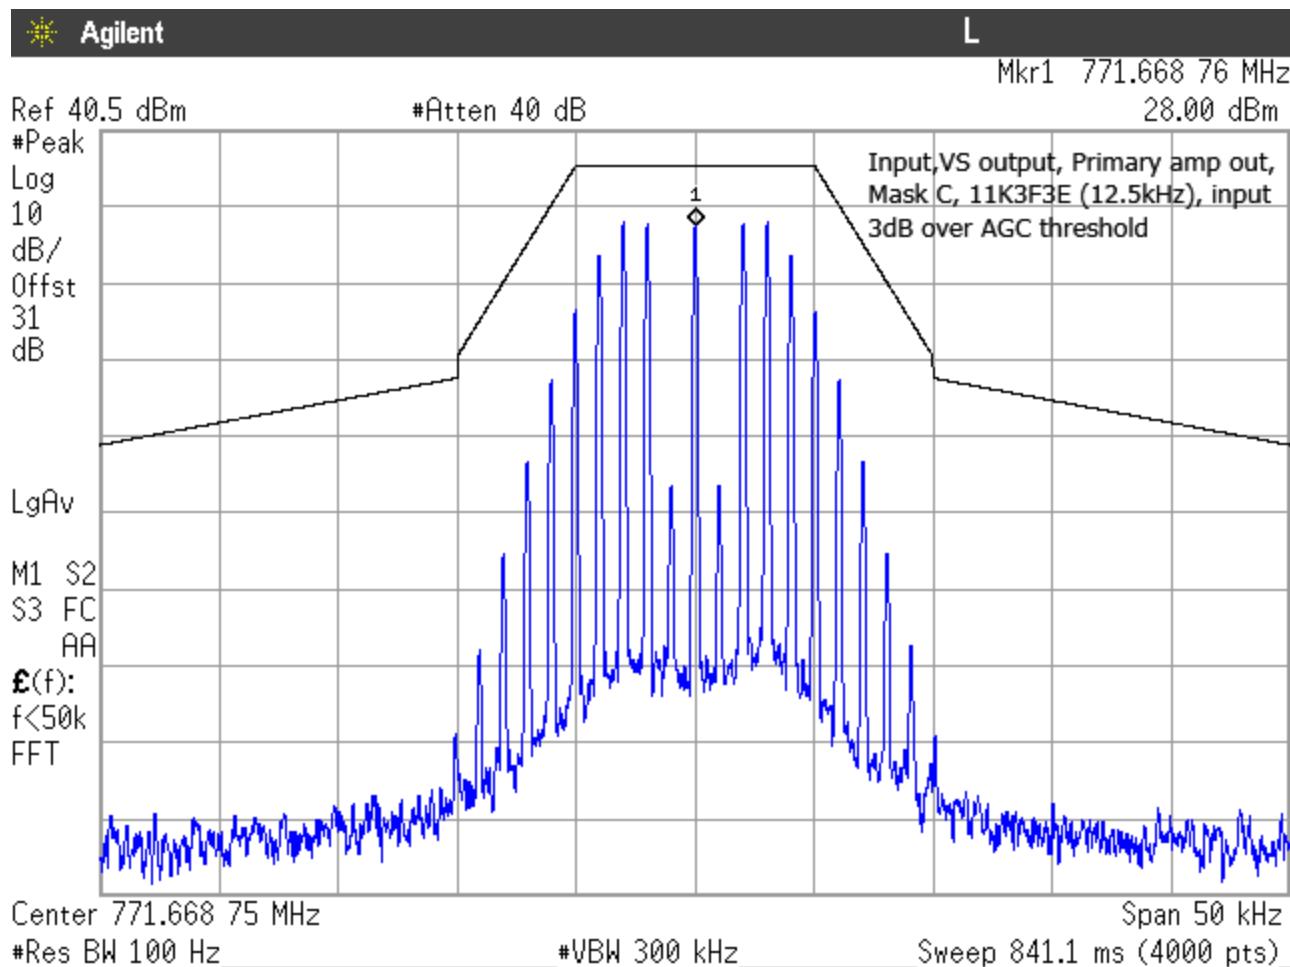


Figure 18: 769-775MHz comparison 11K3F3E input, Mask C- Primary Amp, 3dB over AGC

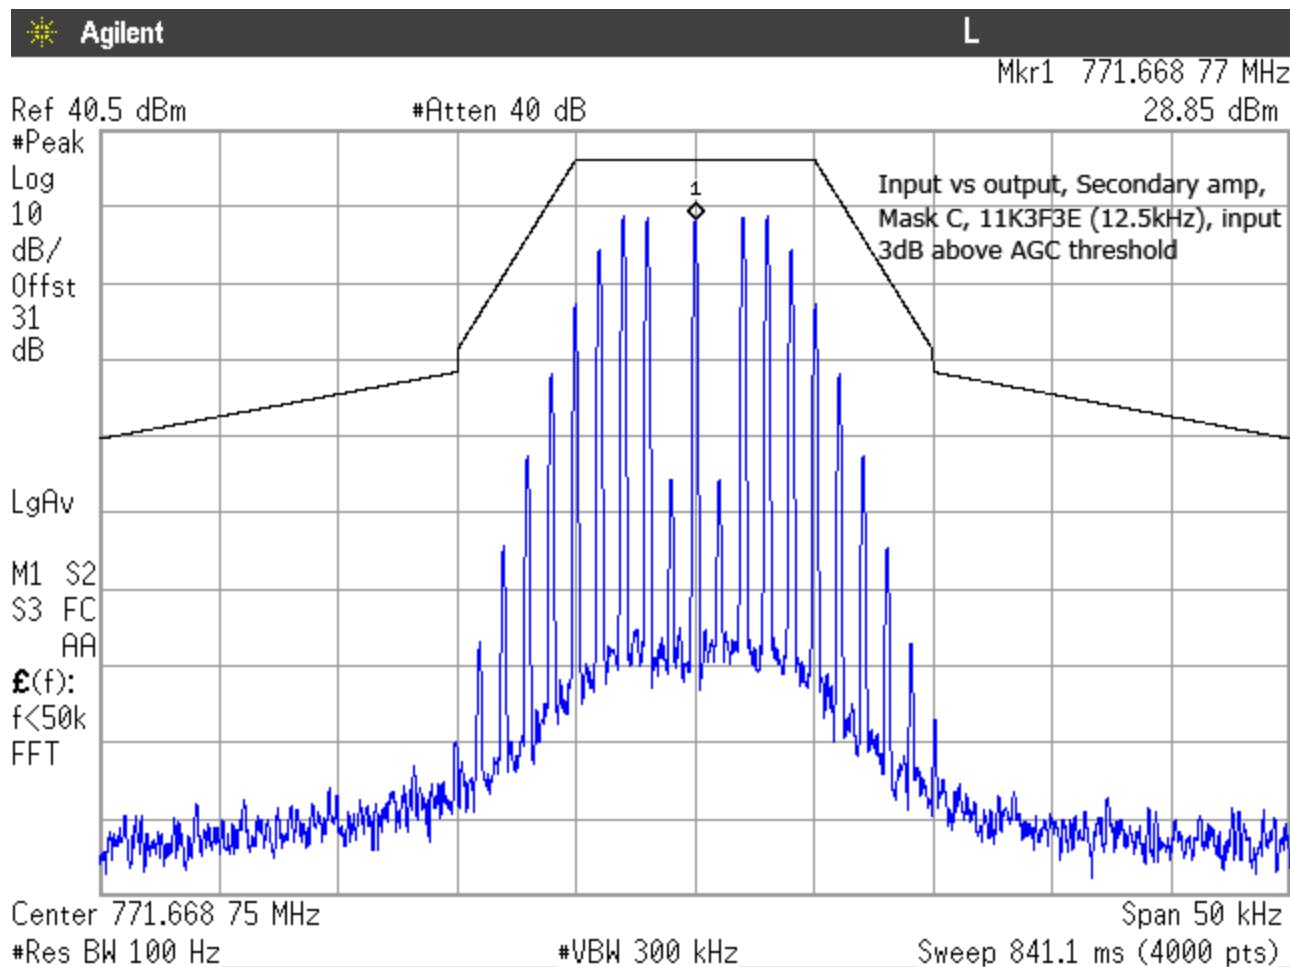


Figure 19: 769-775MHz comparison 11K3F3E input, Mask C- Secondary Amp, 3dB over AGC

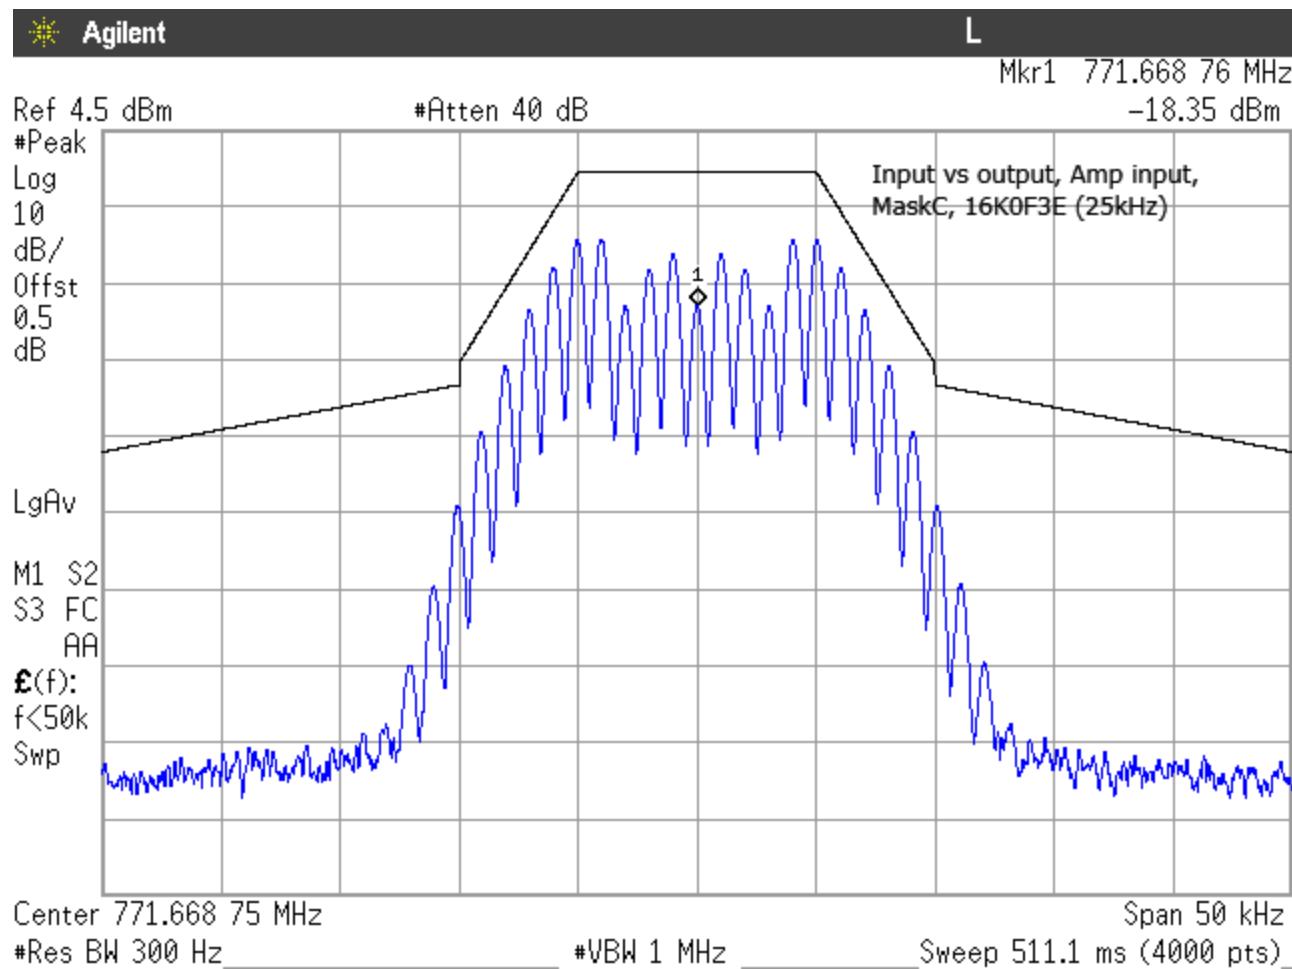


Figure 20: 769-775MHz comparison 16K0F3E input, Mask C, Level 3dB over AGC

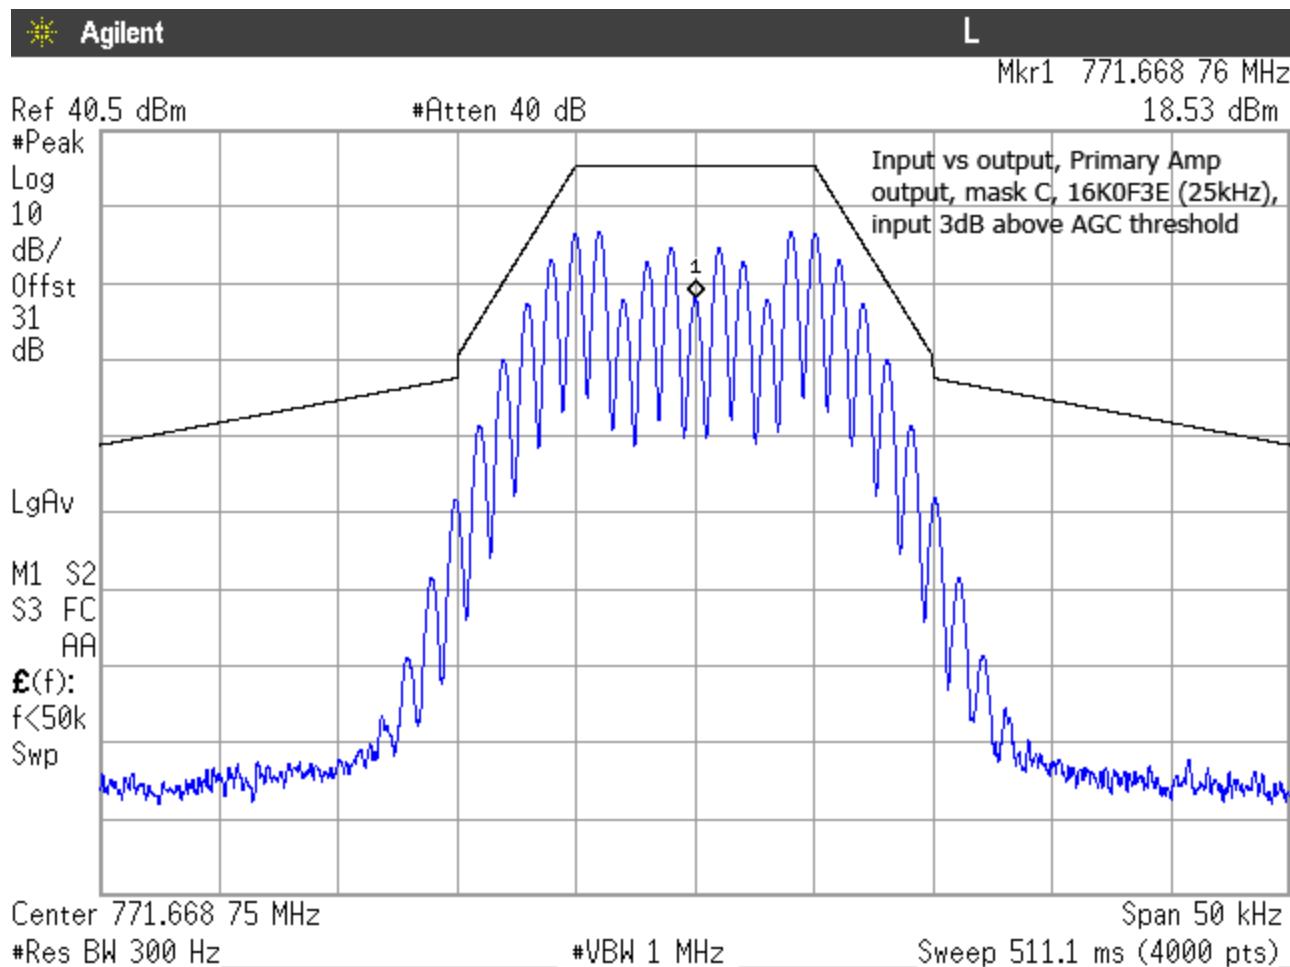


Figure 21: 769-775MHz comparison, 16K0F3E Output, Mask C- Primary Amp, 3dB over AGC

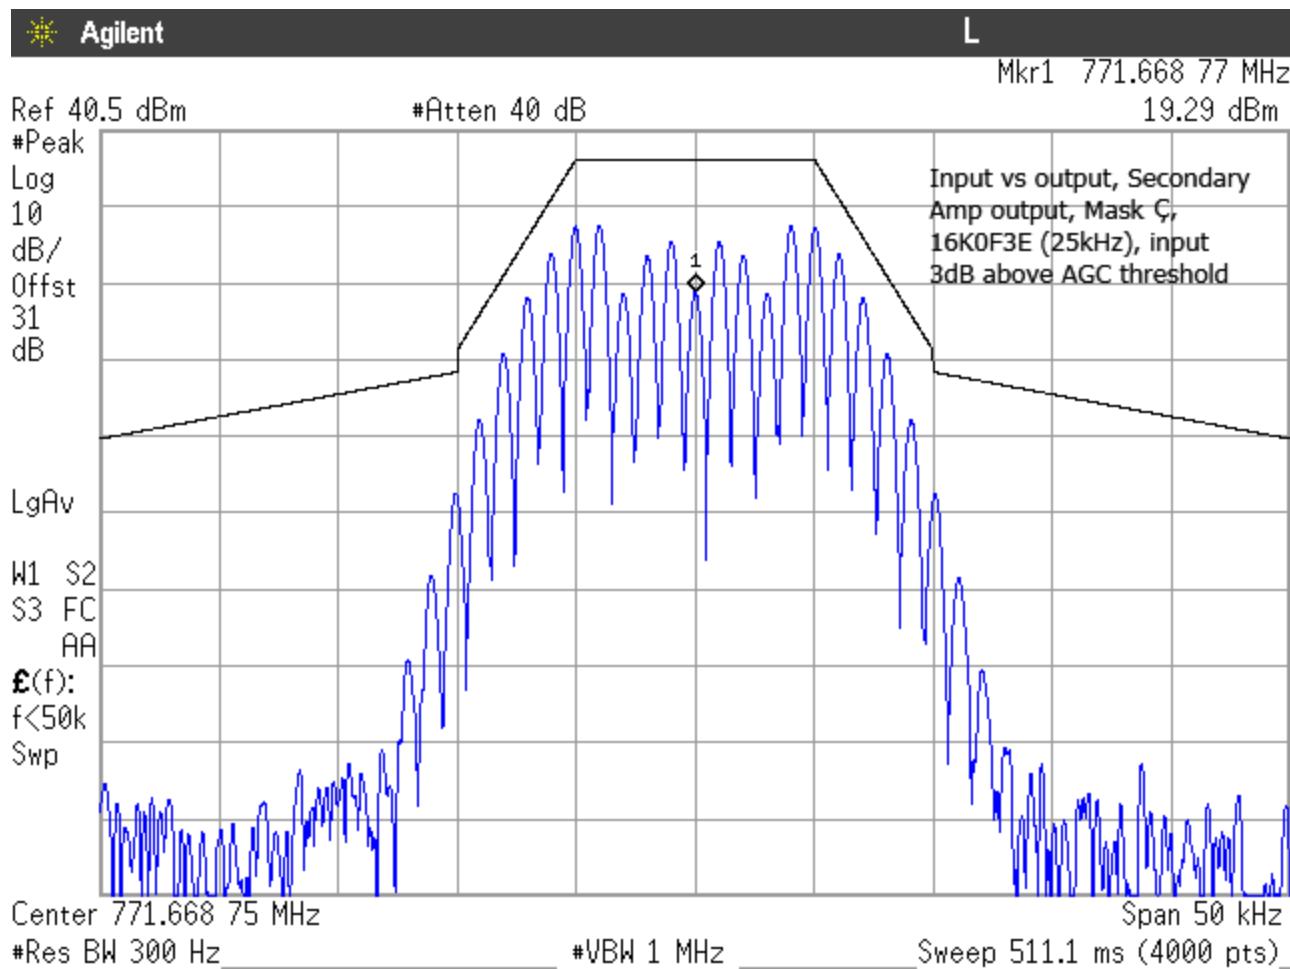


Figure 22: 769-775MHz comparison, 16K0F3E Output, Mask C- Secondary Amp, 3dB over AGC

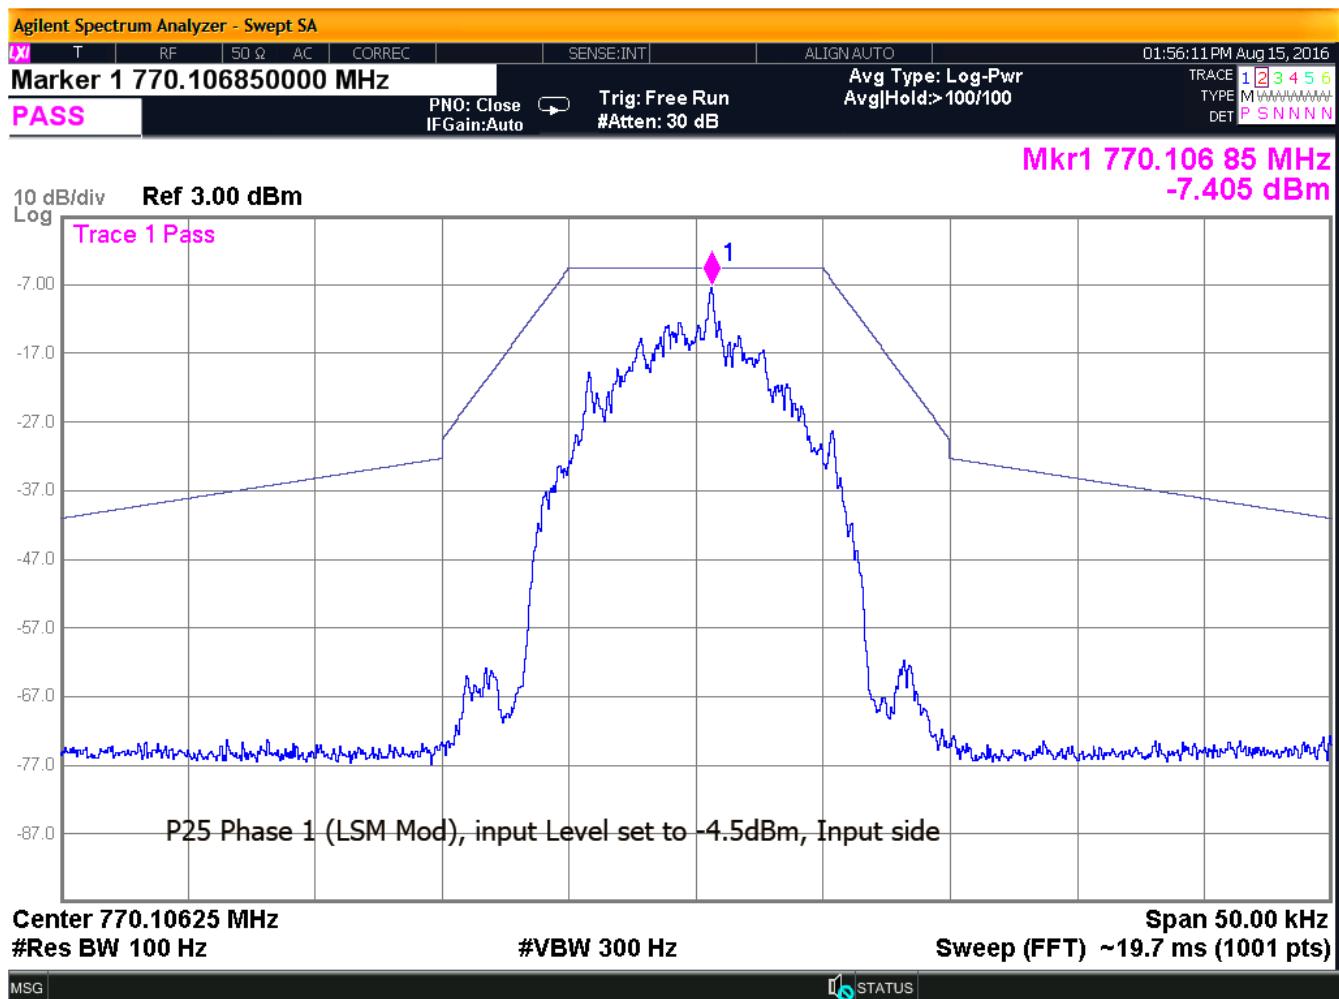


Figure 23: 769-775MHz, P25 Ph1 LSM, Input Amp, 0.5dB under AGC



Figure 24: 769-775MHz, P25 Ph1 LSM Output, Mask C- Primary Amp, 0.5dB under AGC

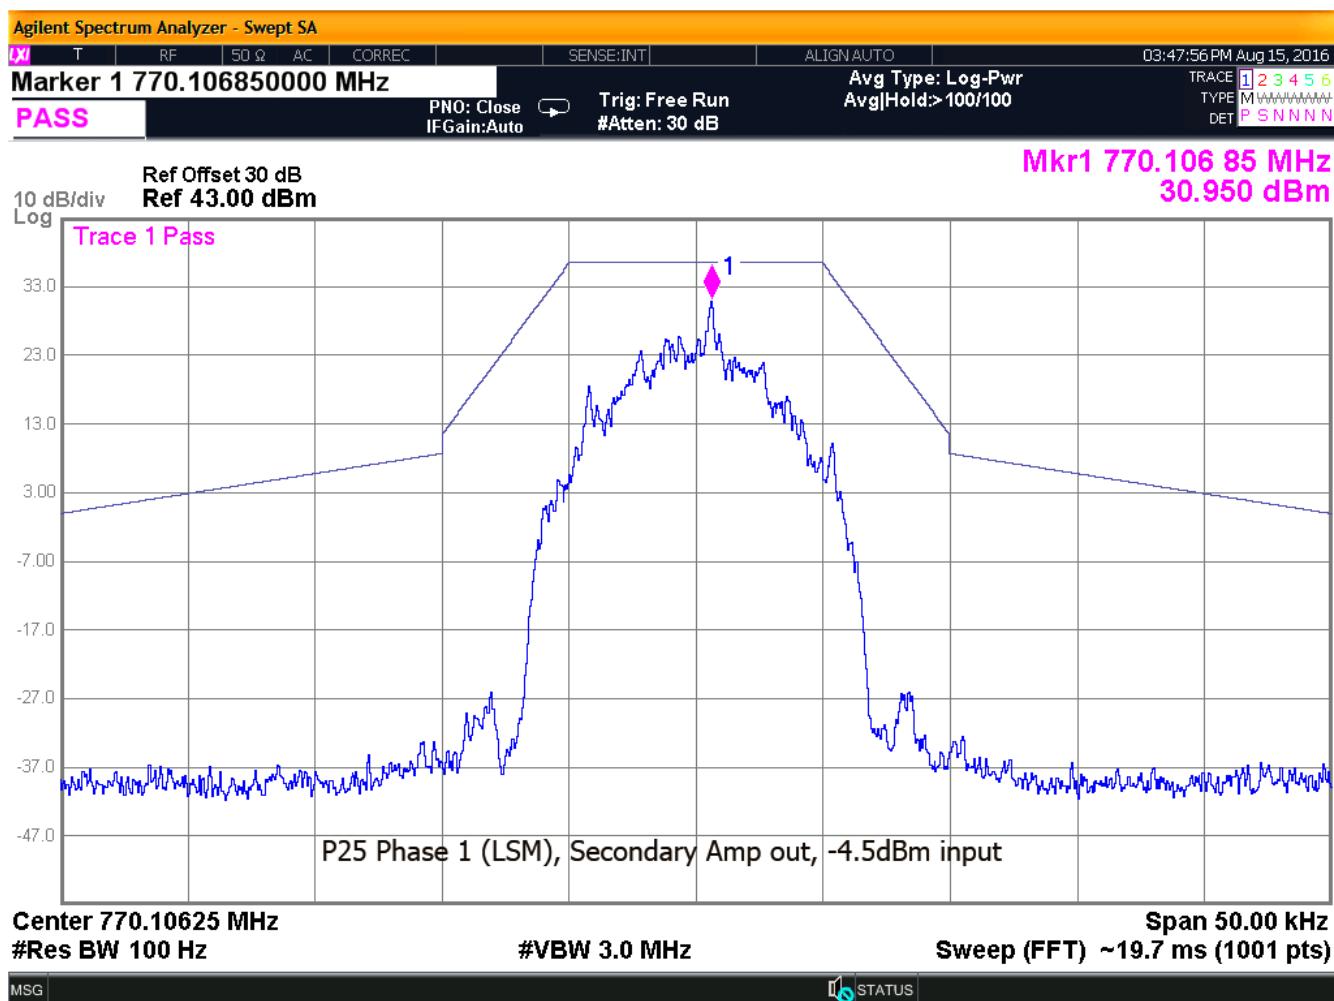


Figure 25: 769-775MHz, P25 Ph1 LSM Output, Mask C- Secondary Amp, 0.5db under AGC

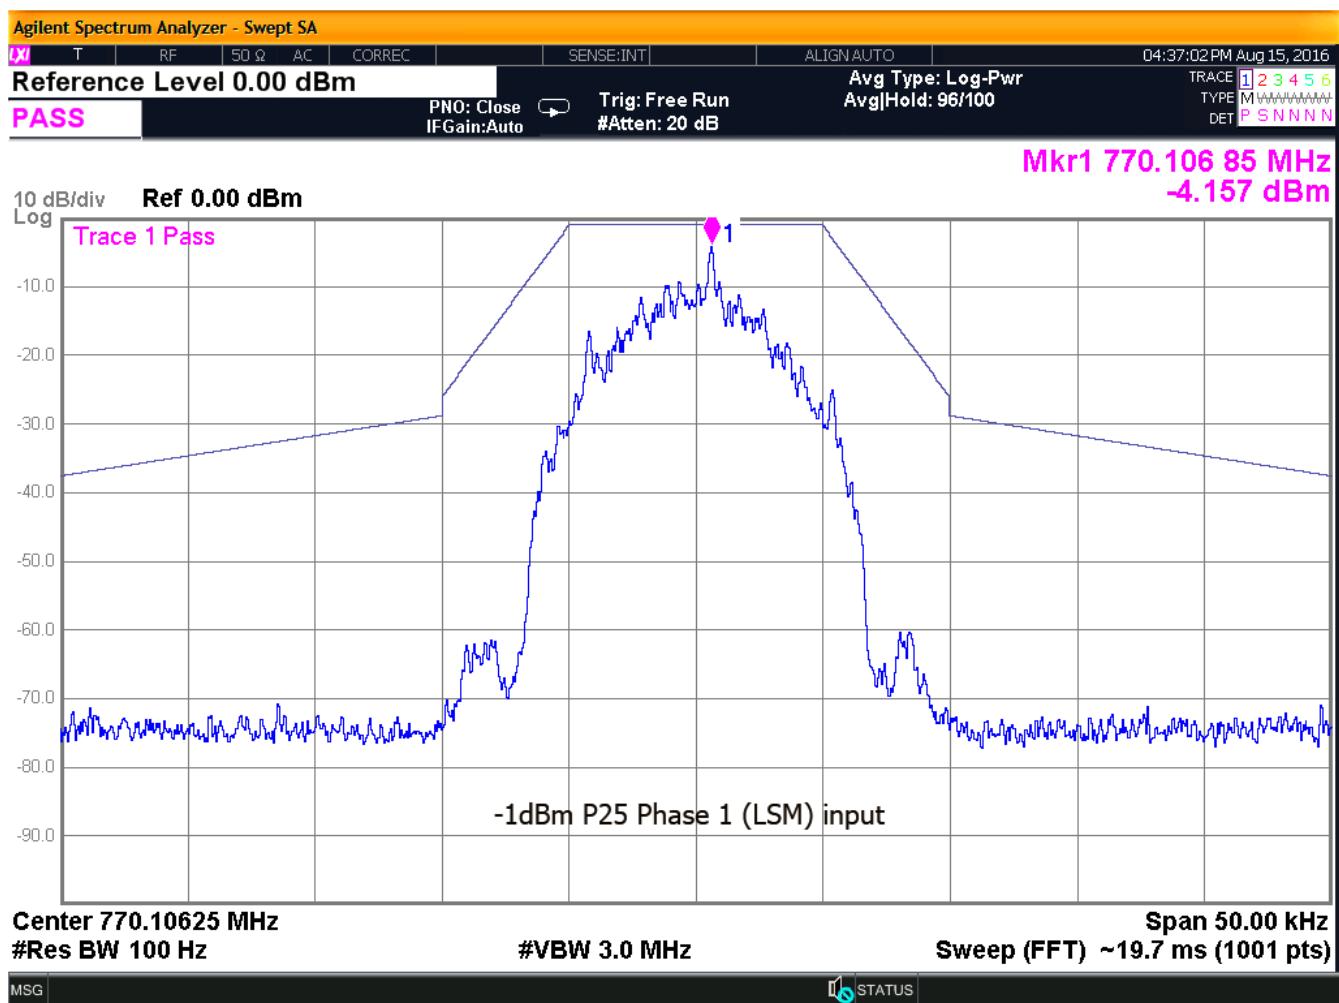


Figure 26: 769-775MHz, P25 Ph1 LSM, Input Amp, 3dB over AGC

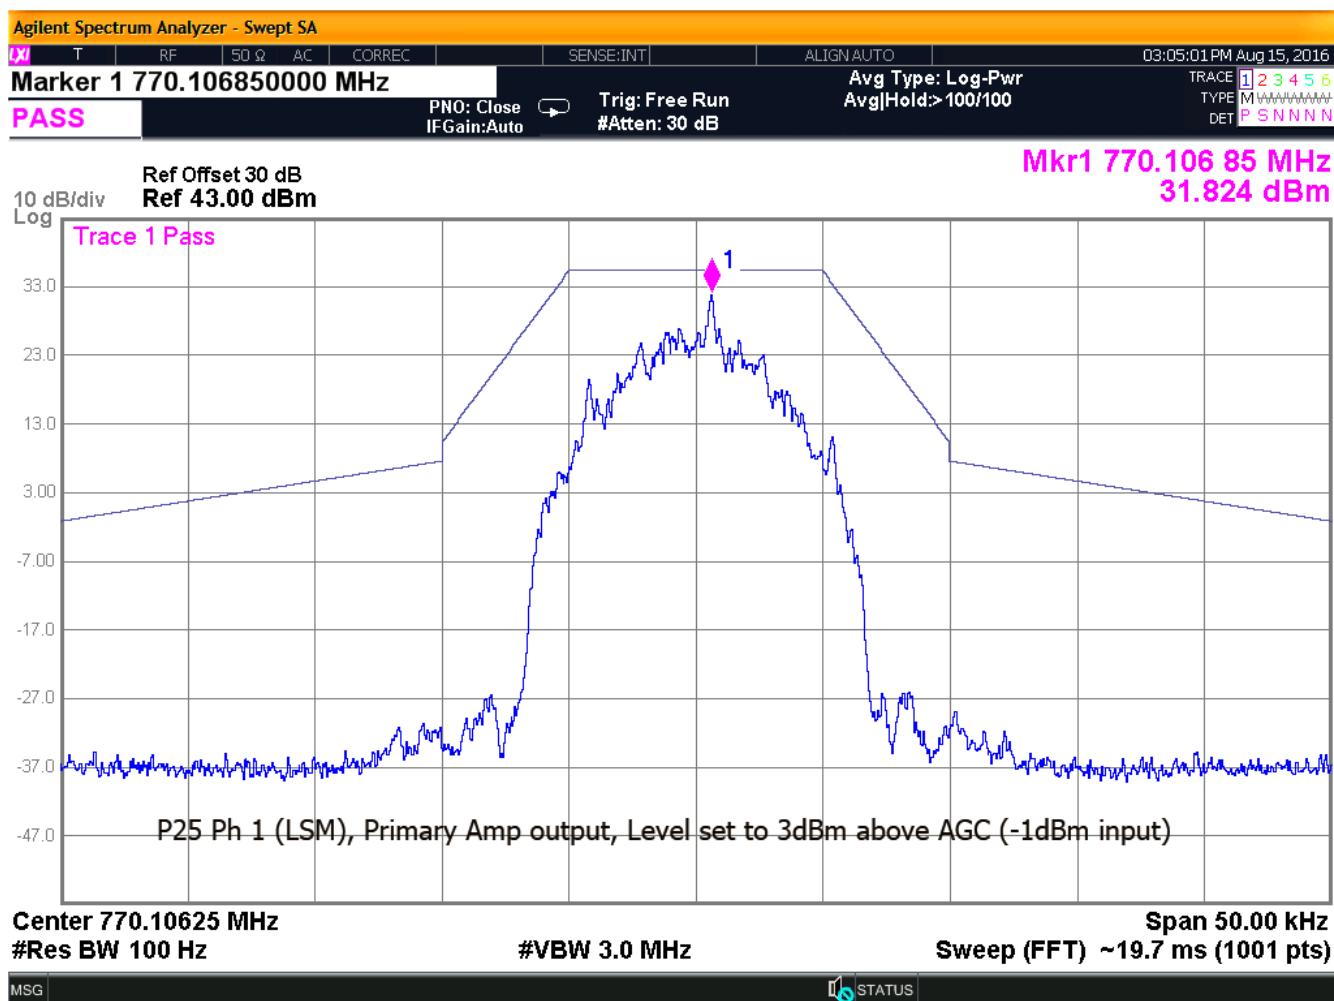


Figure 27: 769-775MHz, P25 Ph1 LSM Output, Mask C- Primary Amp, 3dB over AGC

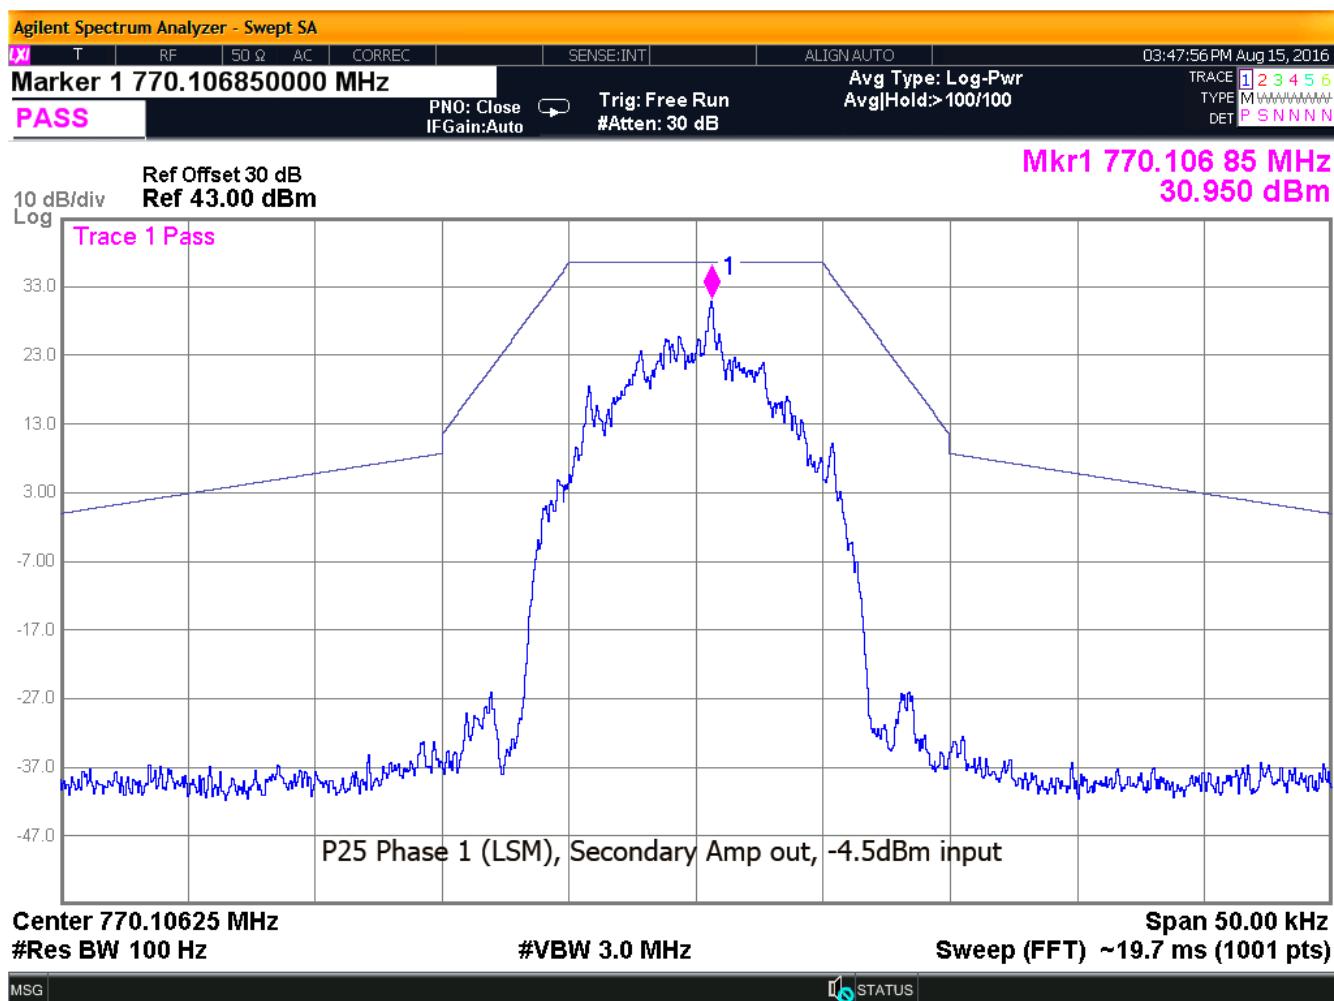


Figure 28: 769-775MHz, P25 Ph1 LSM Output, Mask C- Secondary Amp, 3db over AGC

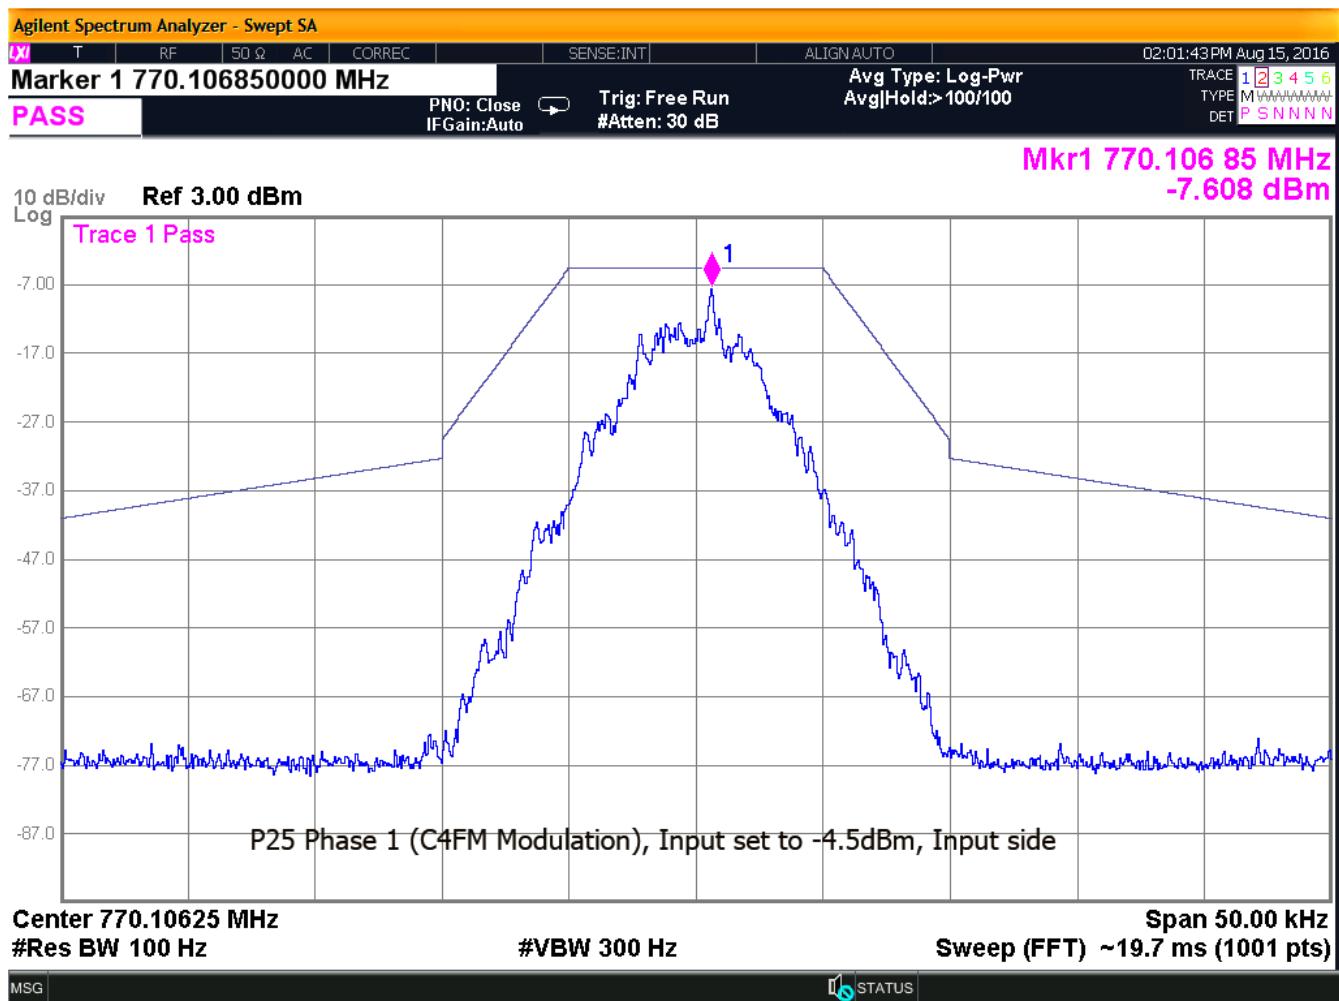


Figure 29: 769-775MHz, P25 Ph1 C4FM, Input Amp, 0.5dB under AGC

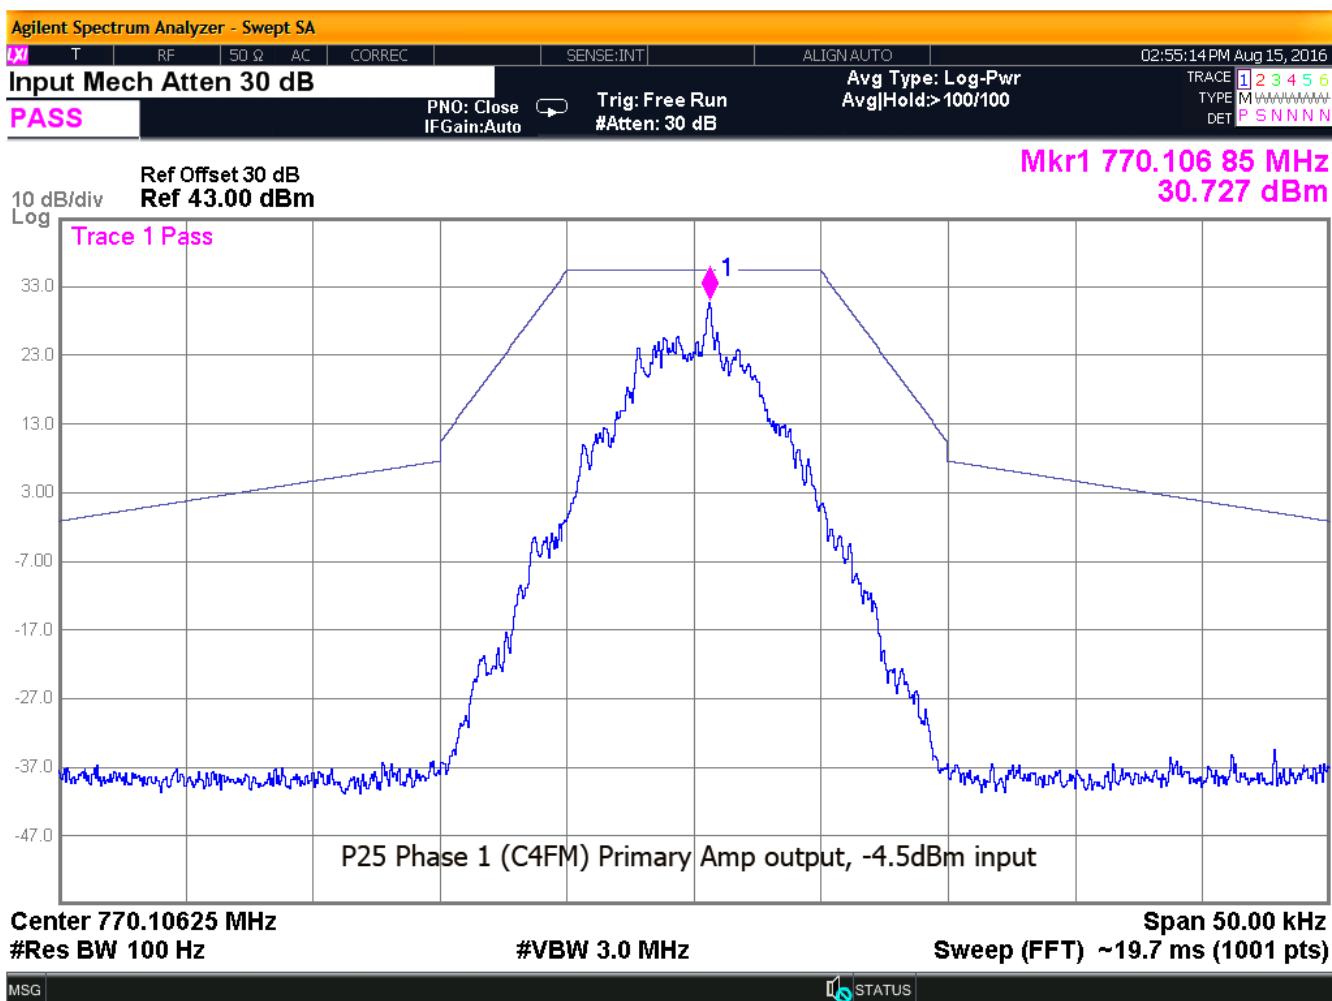


Figure 30: 769-775MHz, P25 Ph1 C4FM Output, Mask C- Primary Amp, 0.5dB under AGC

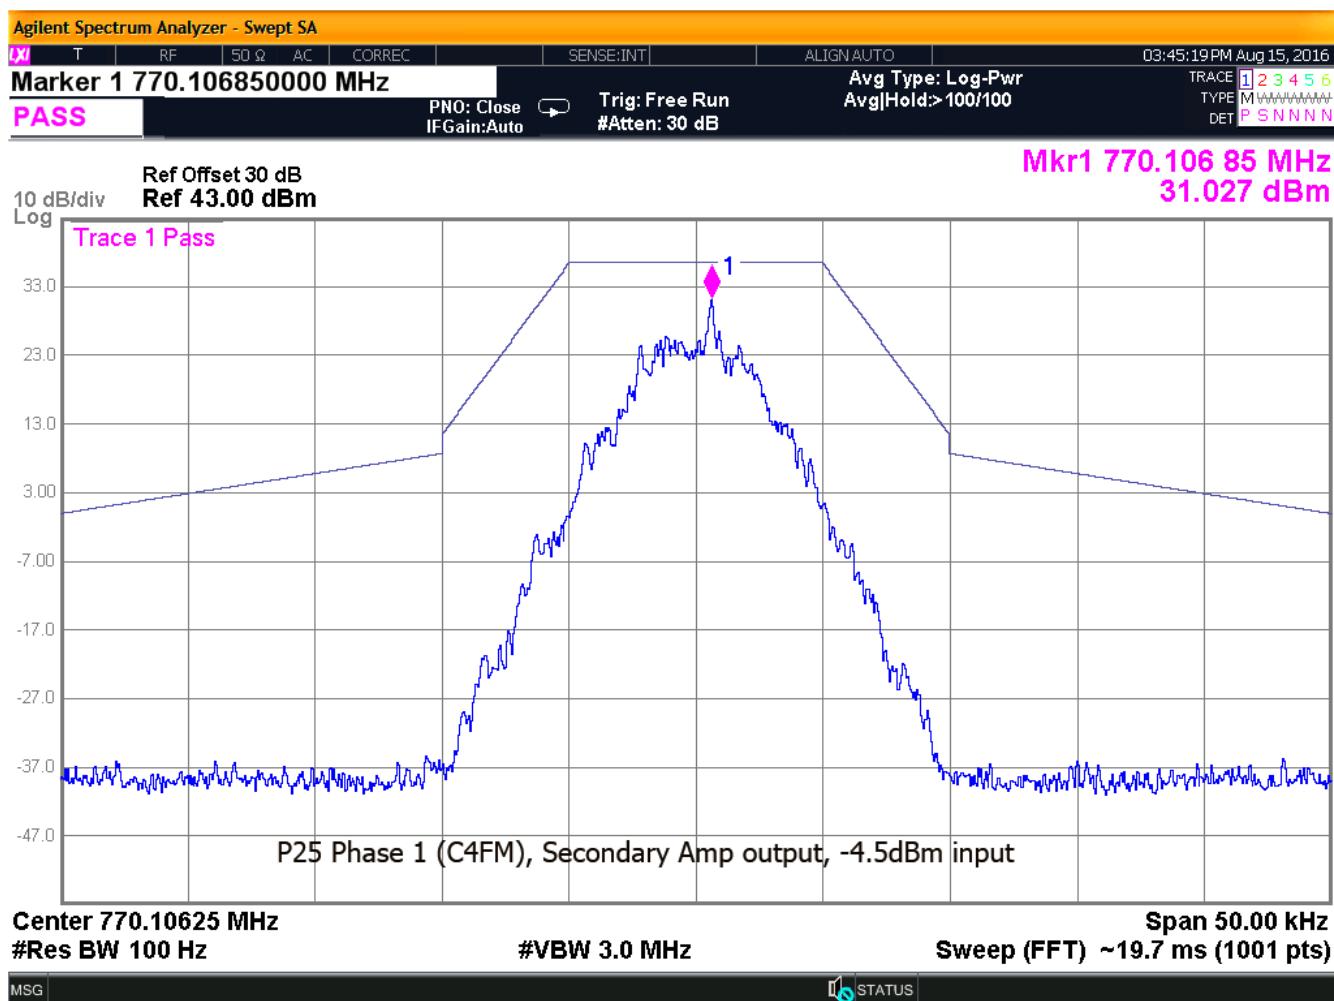


Figure 31: 769-775MHz, P25 Ph1 C4FM Output, Mask C- Secondary Amp, 0.5db under AGC

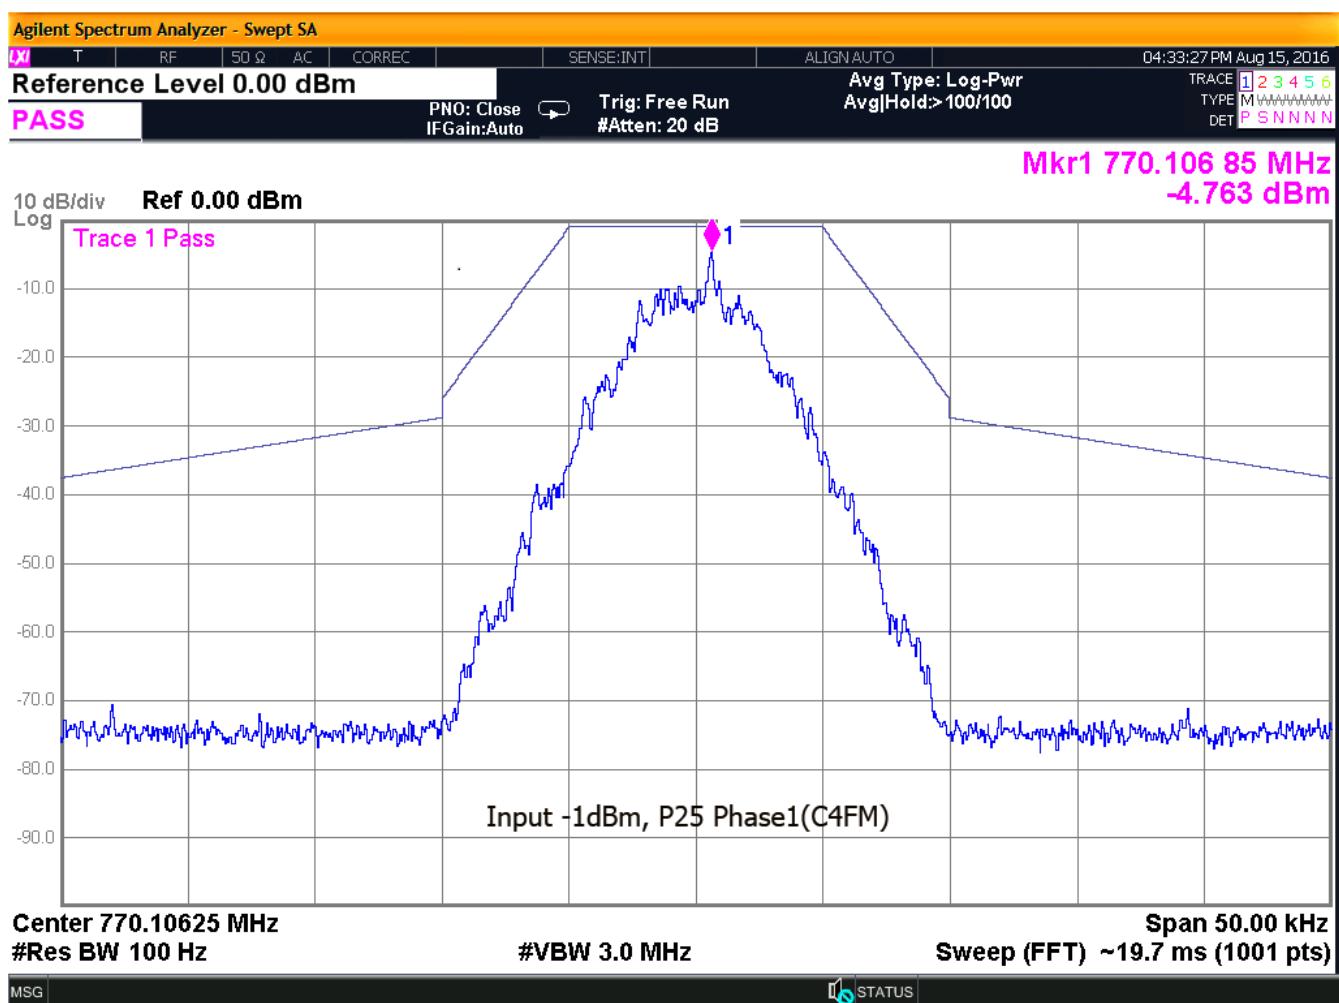


Figure 32: 769-775MHz, P25 Ph1 C4FM, Input Amp, 3dB over AGC

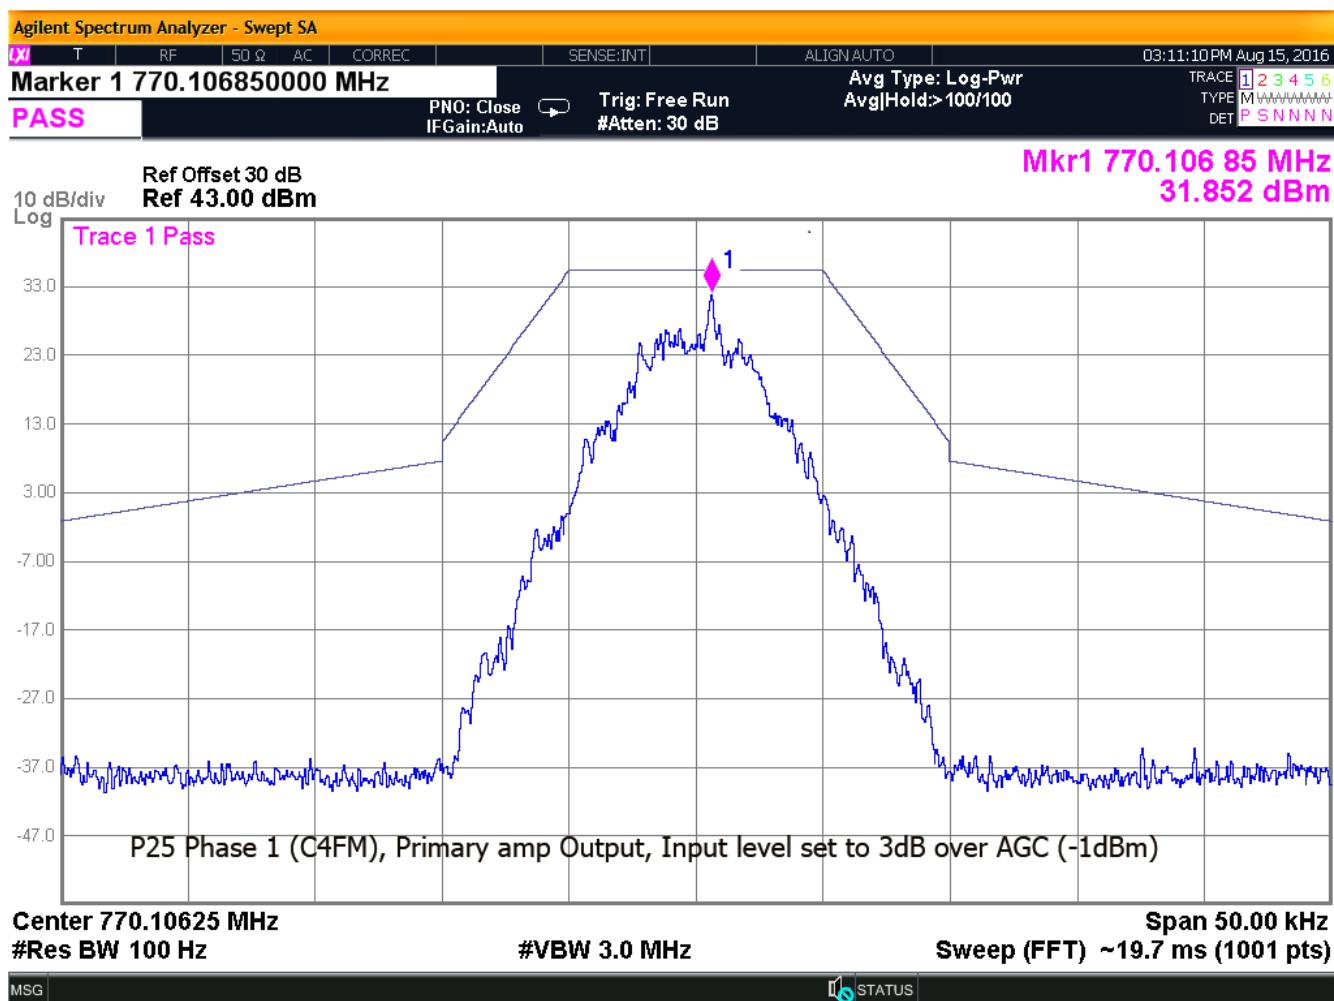


Figure 33: 769-775MHz, P25 Ph1C4FM Output, Mask C- Primary Amp, 3dB over AGC

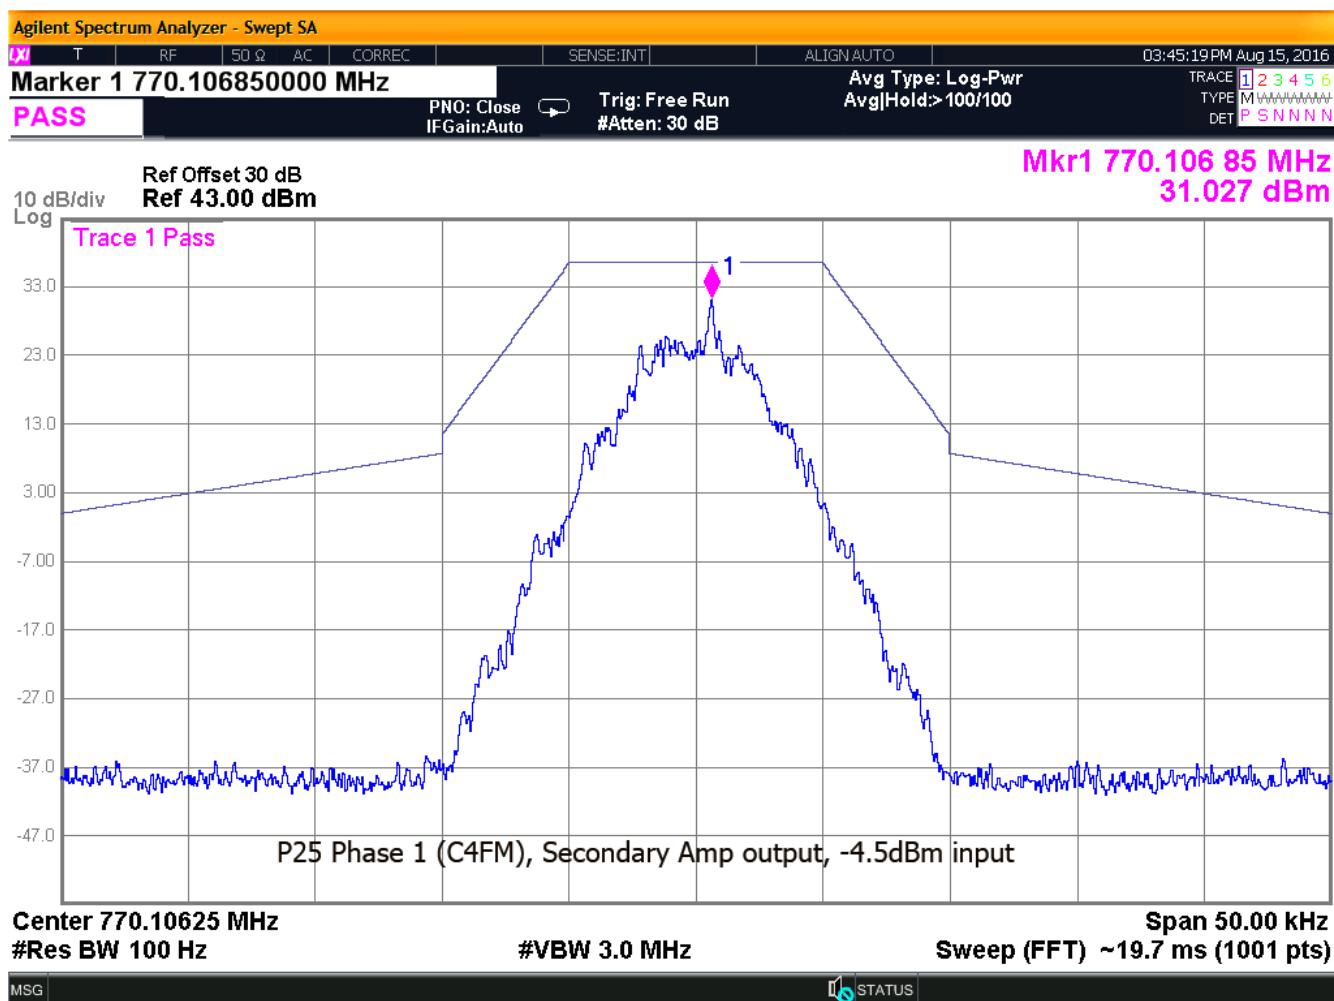


Figure 34: 769-775MHz, P25 Ph1 C4FM Output, Mask C- Secondary Amp, 3db over AGC

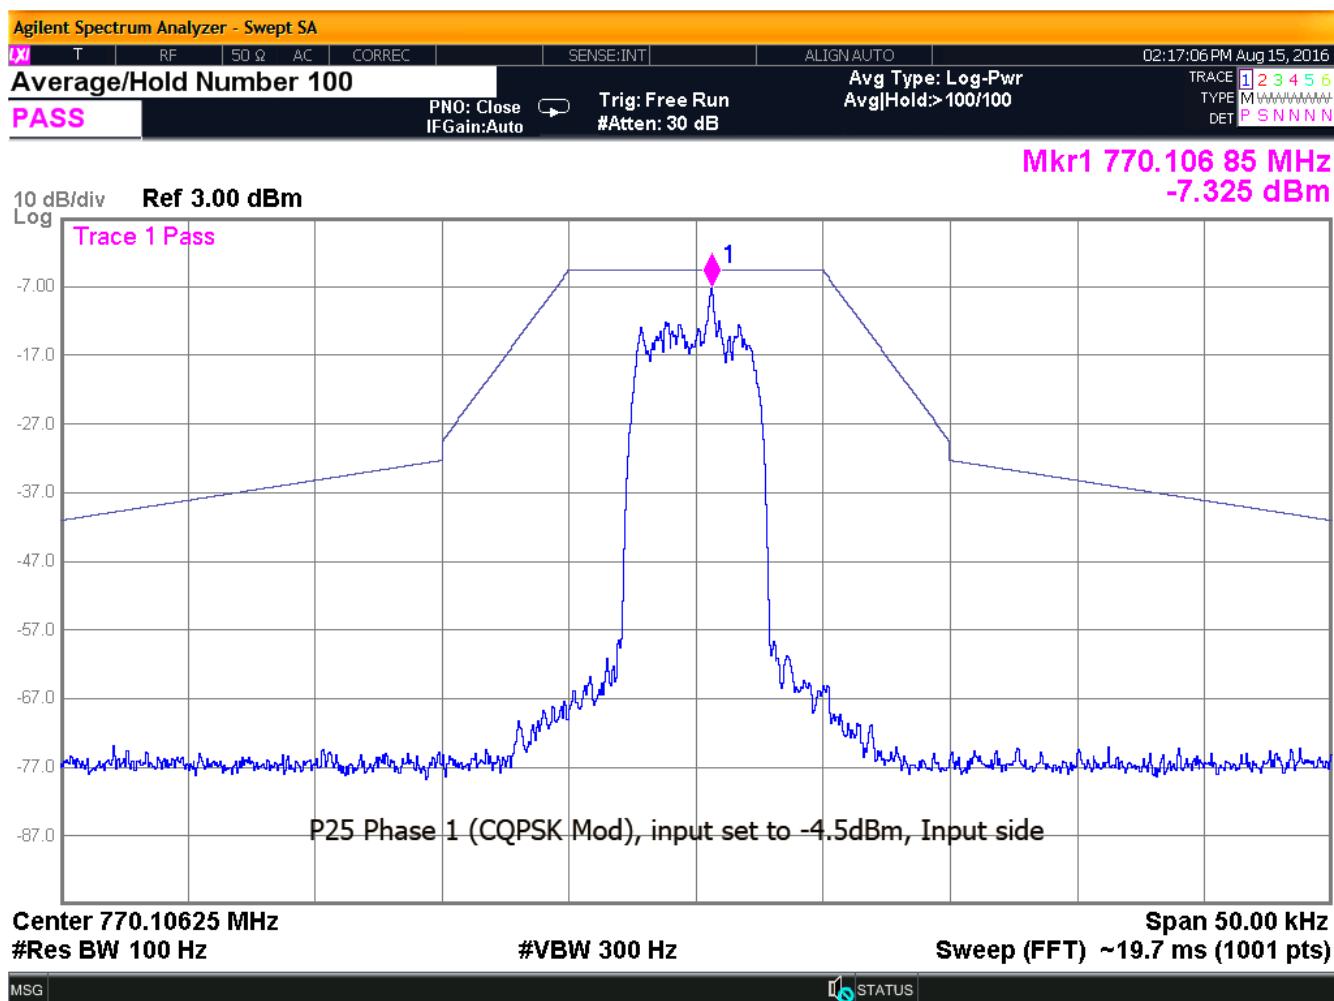


Figure 35: 769-775MHz, P25 Ph1 CQPSK, Input Amp, 0.5dB under AGC

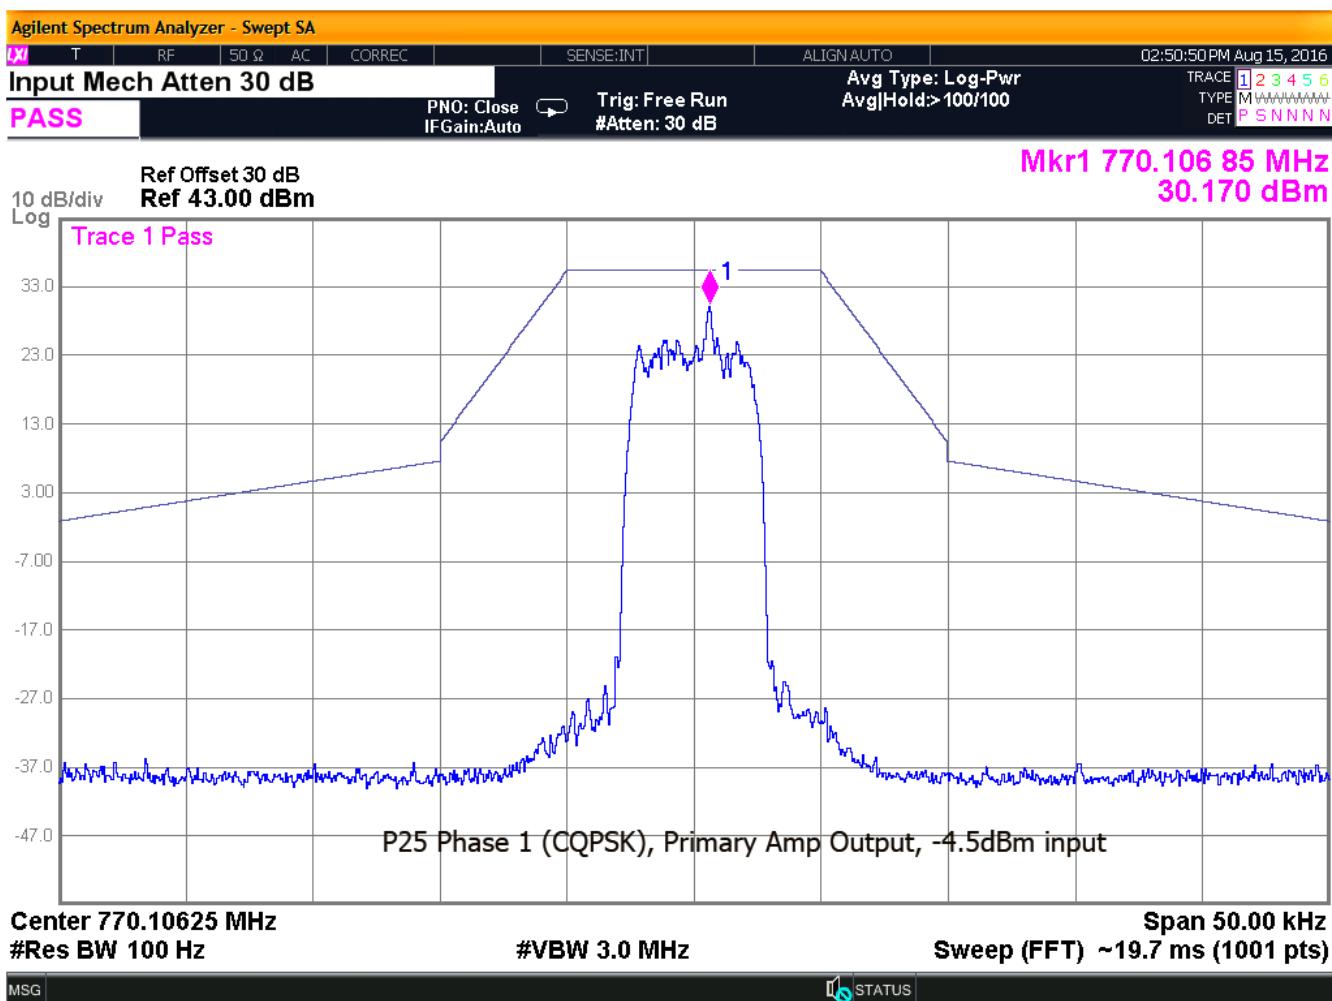


Figure 36: 769-775MHz, P25 Ph1 CQPSK Output, Mask C- Primary Amp, 0.5dB under AGC

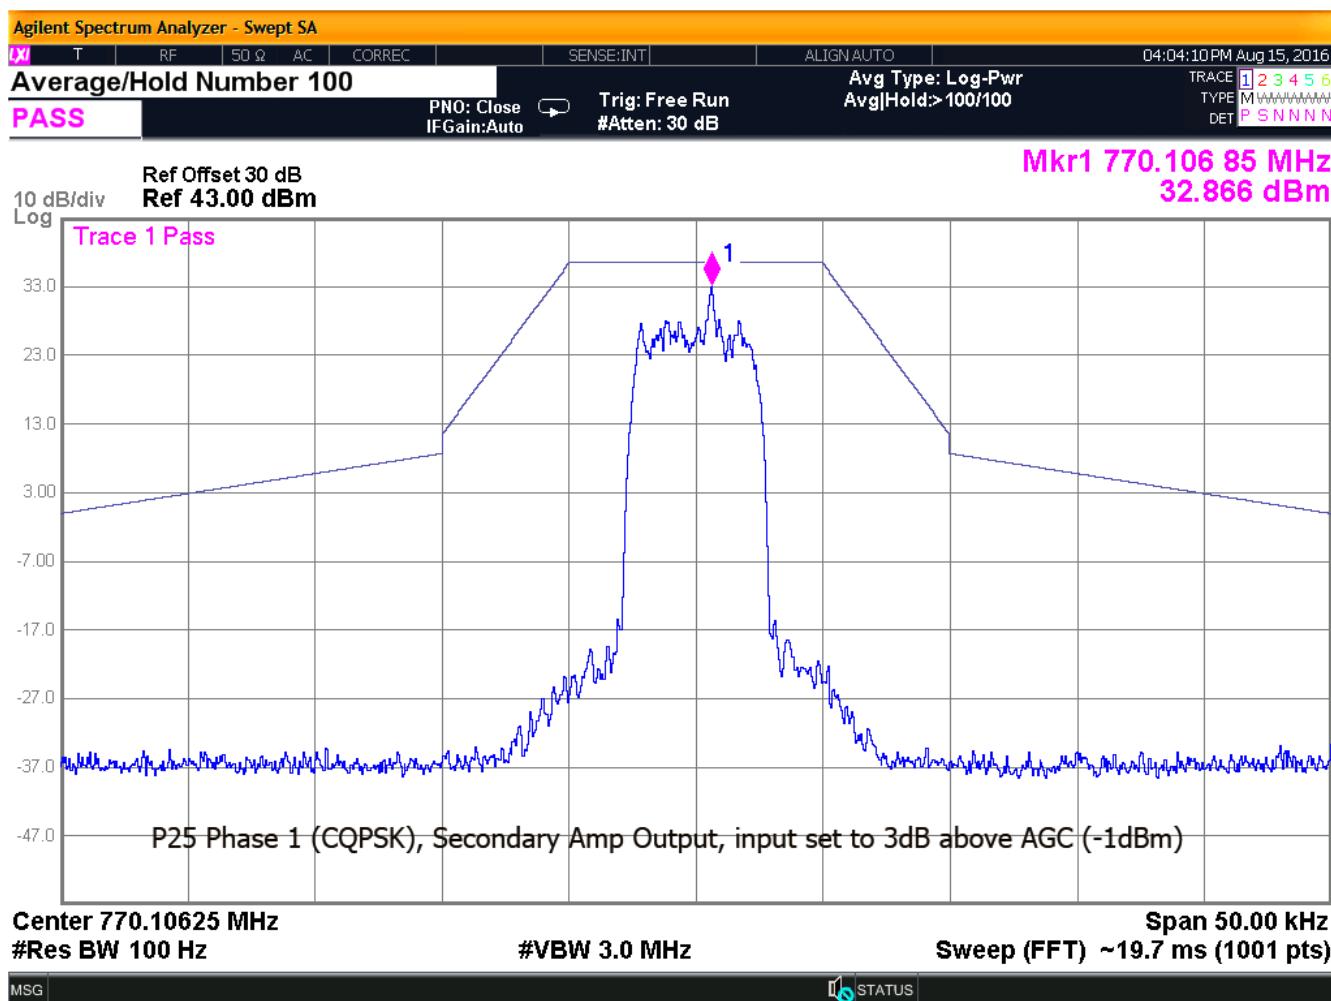


Figure 37: 769-775MHz, P25 Ph1 CQPSK Output, Mask C- Secondary Amp, 0.5db under AGC

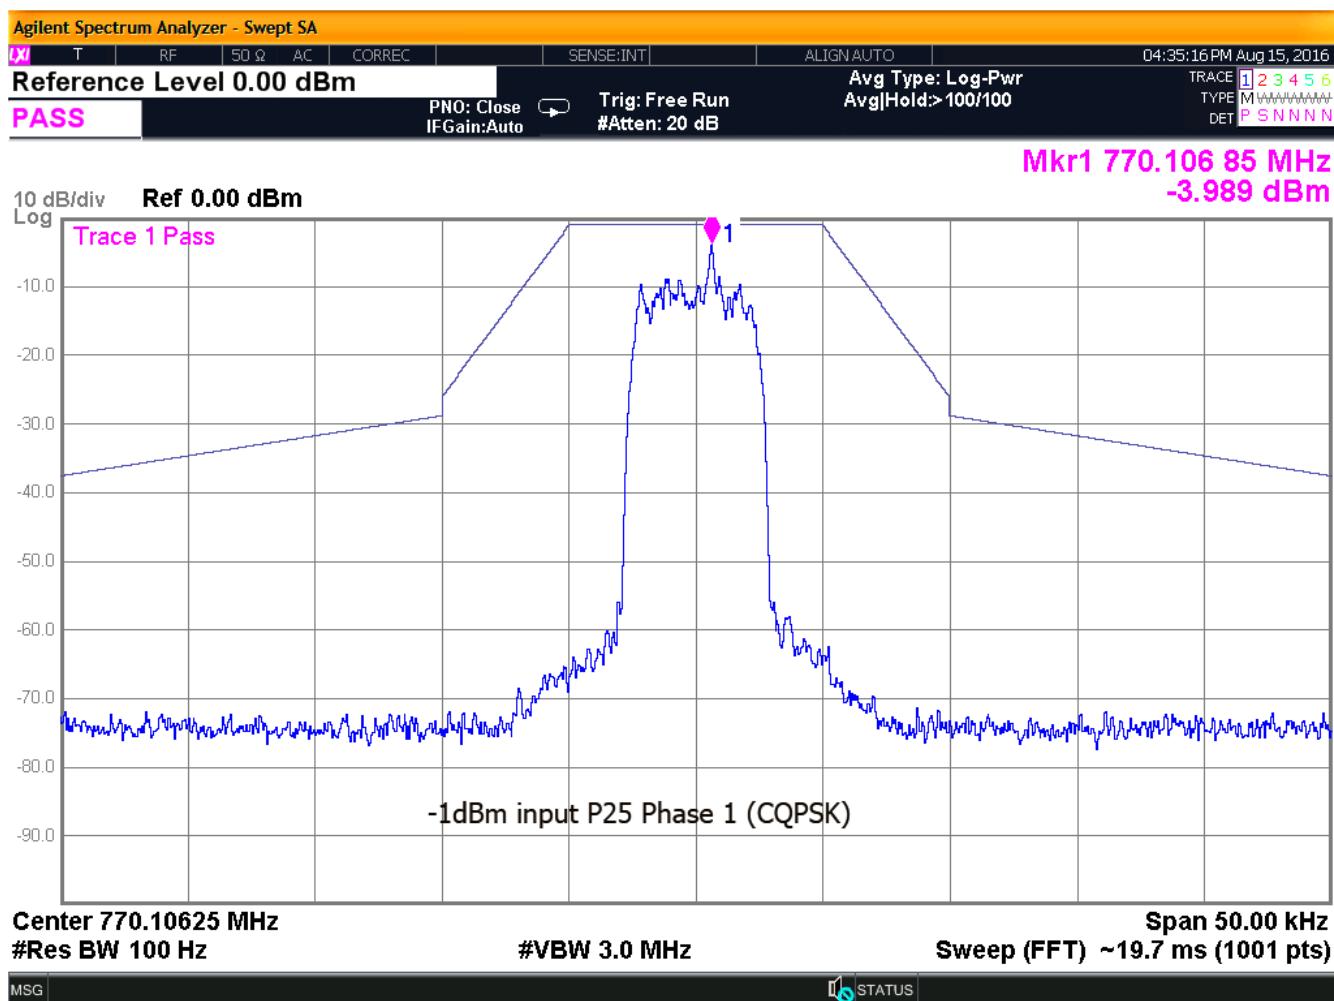


Figure 38: 769-775MHz, P25 Ph1 CQPSK, Input Amp, 3dB over AGC

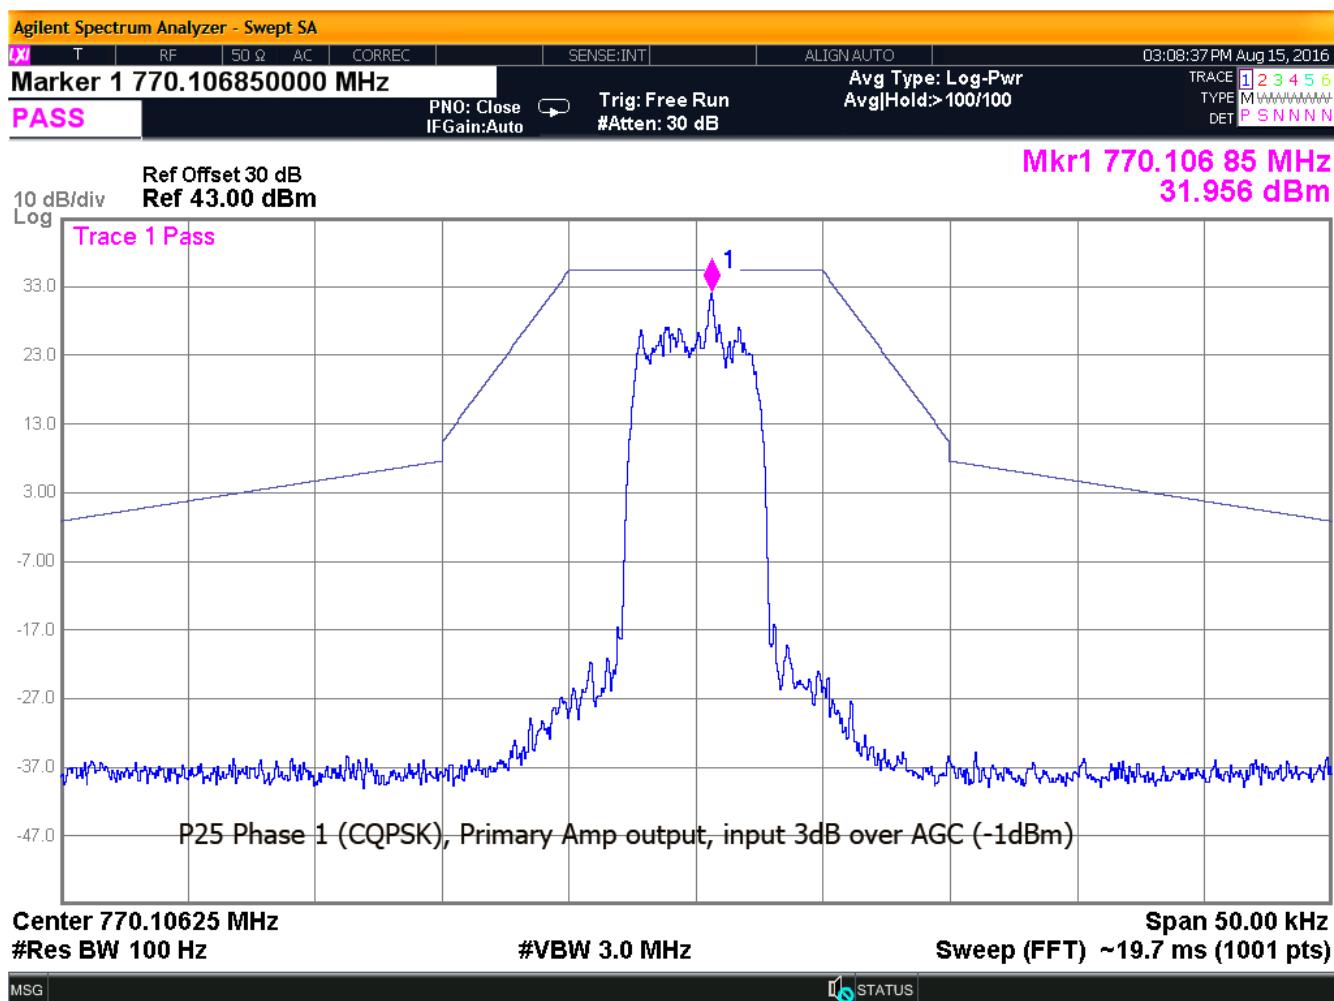


Figure 39: 769-775MHz, P25 Ph1 CQPSK Output, Mask C- Primary Amp, 3dB over AGC

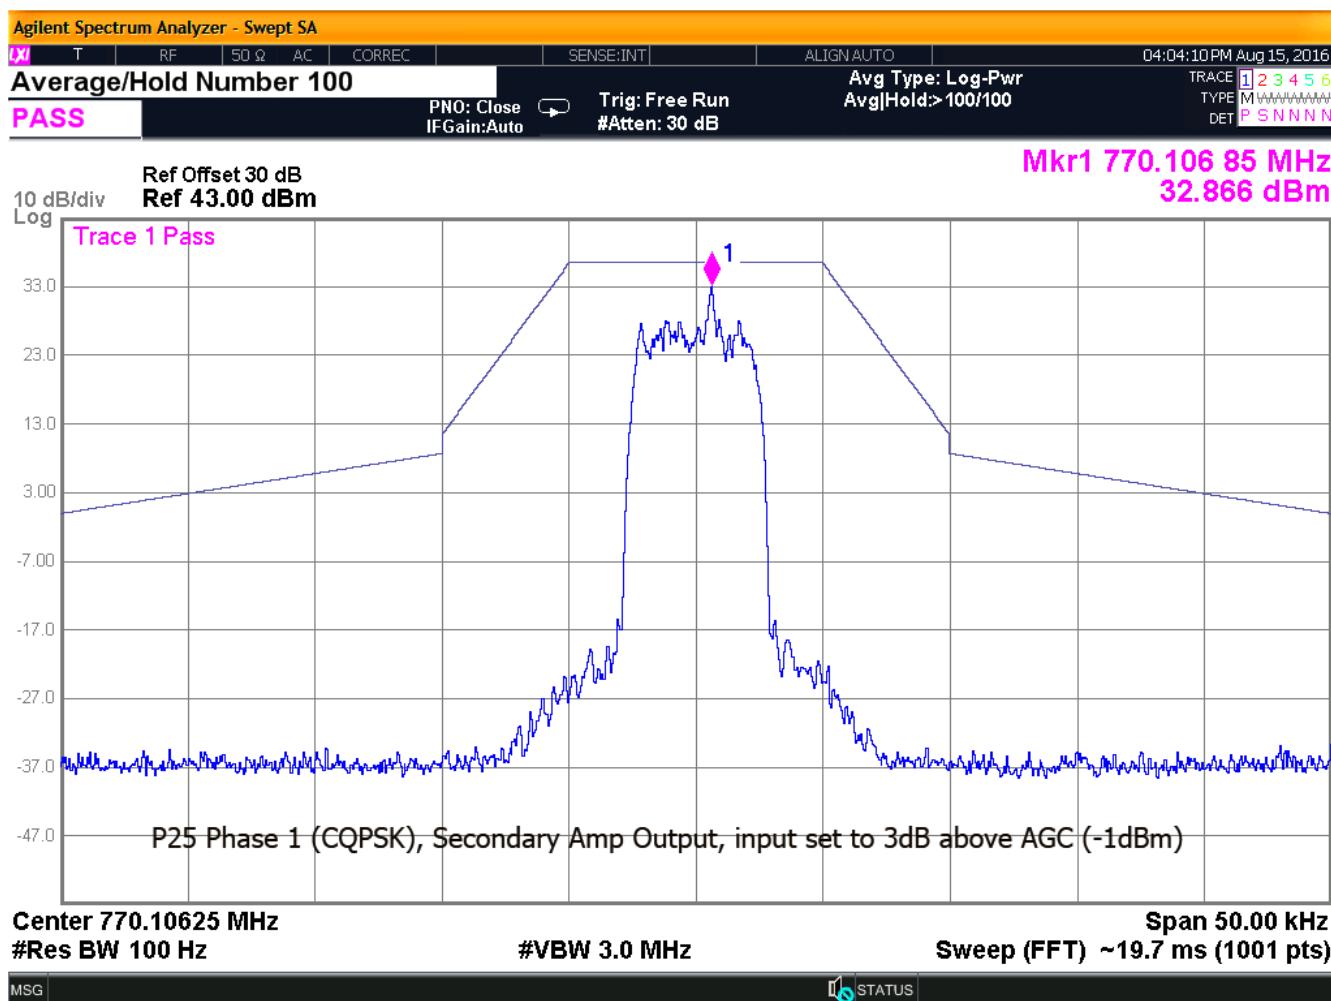


Figure 40: 769-775MHz, P25 Ph1 CQPSK Output, Mask C- Secondary Amp, 3db over AGC

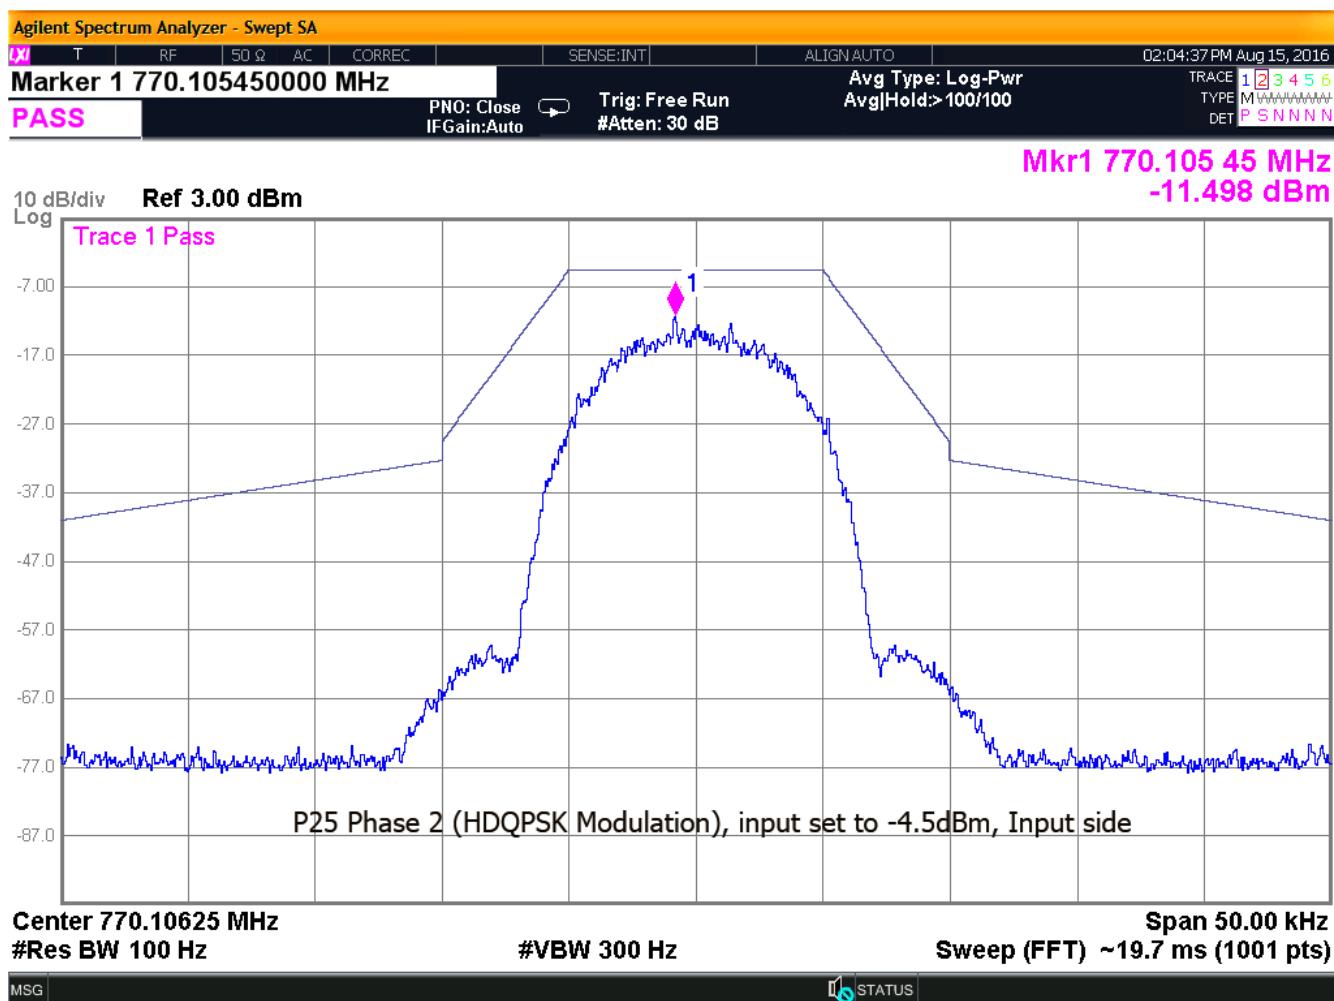


Figure 41: 769-775MHz, P25 Ph2 HDQPSK, Input Amp, 0.5dB under AGC

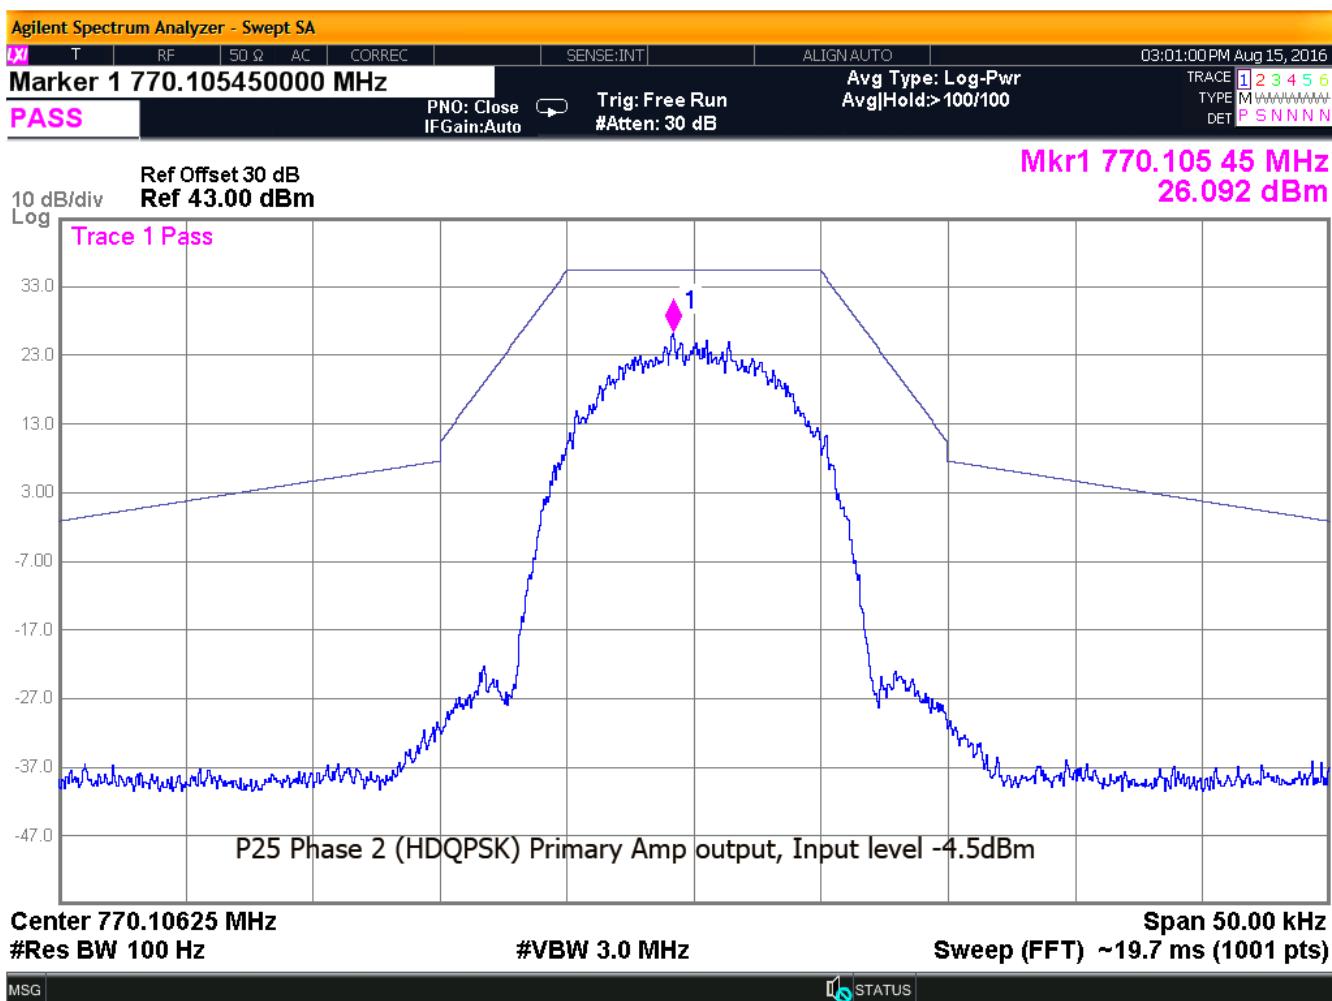


Figure 42: 769-775MHz, P25 Ph2 HDQPSK Output, Mask C- Primary Amp, 0.5dB under AGC

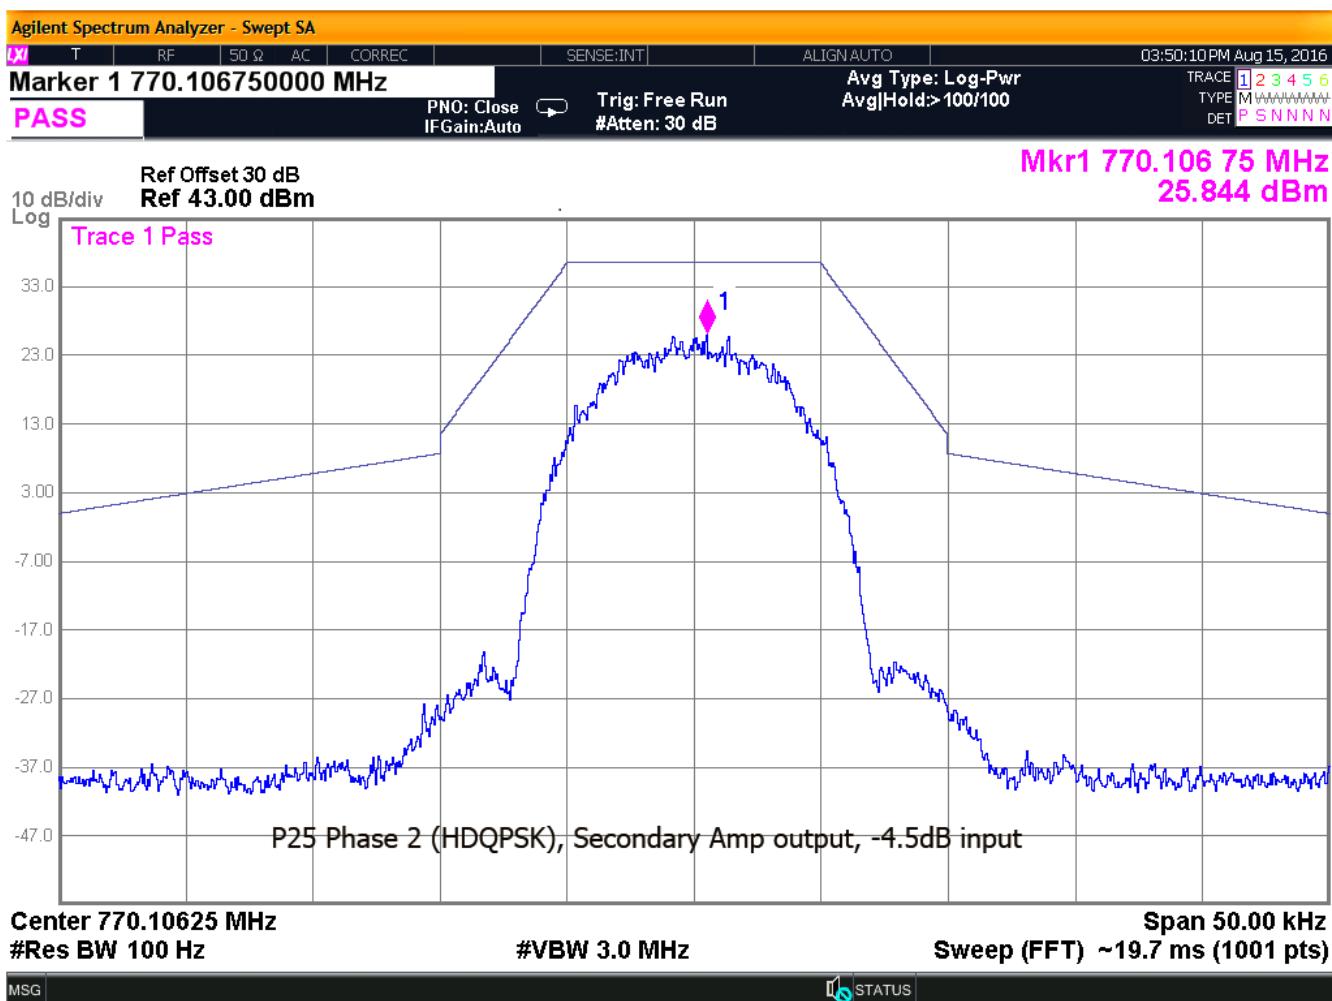


Figure 43: 769-775MHz, P25 Ph2 HDQPSK Output, Mask C- Secondary Amp, 0.5db under AGC

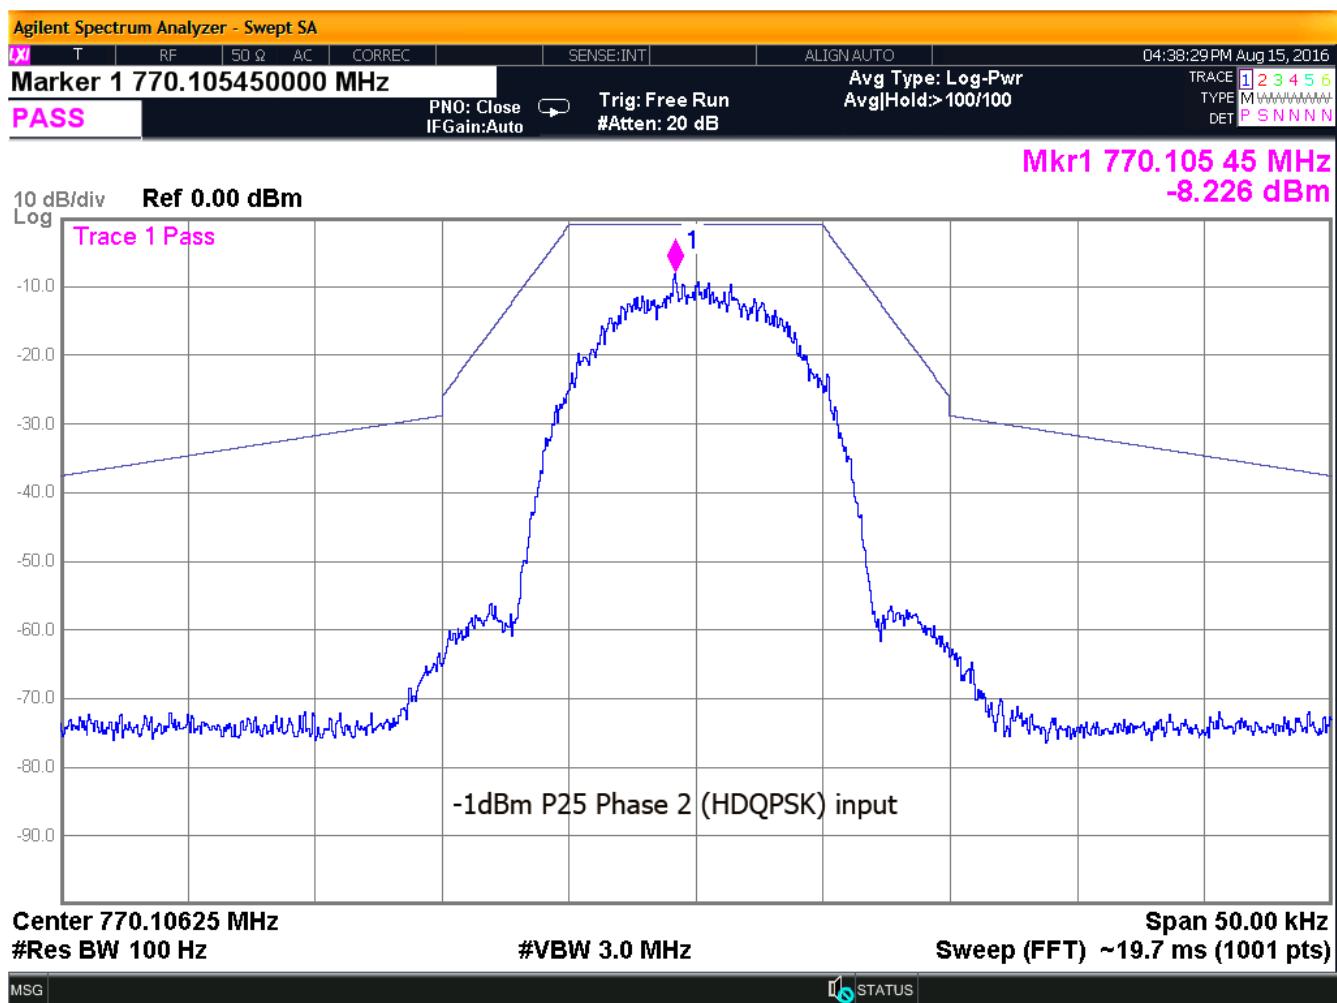


Figure 44: 769-775MHz, P25 Ph2 HDQPSK, Input Amp, 3dB over AGC

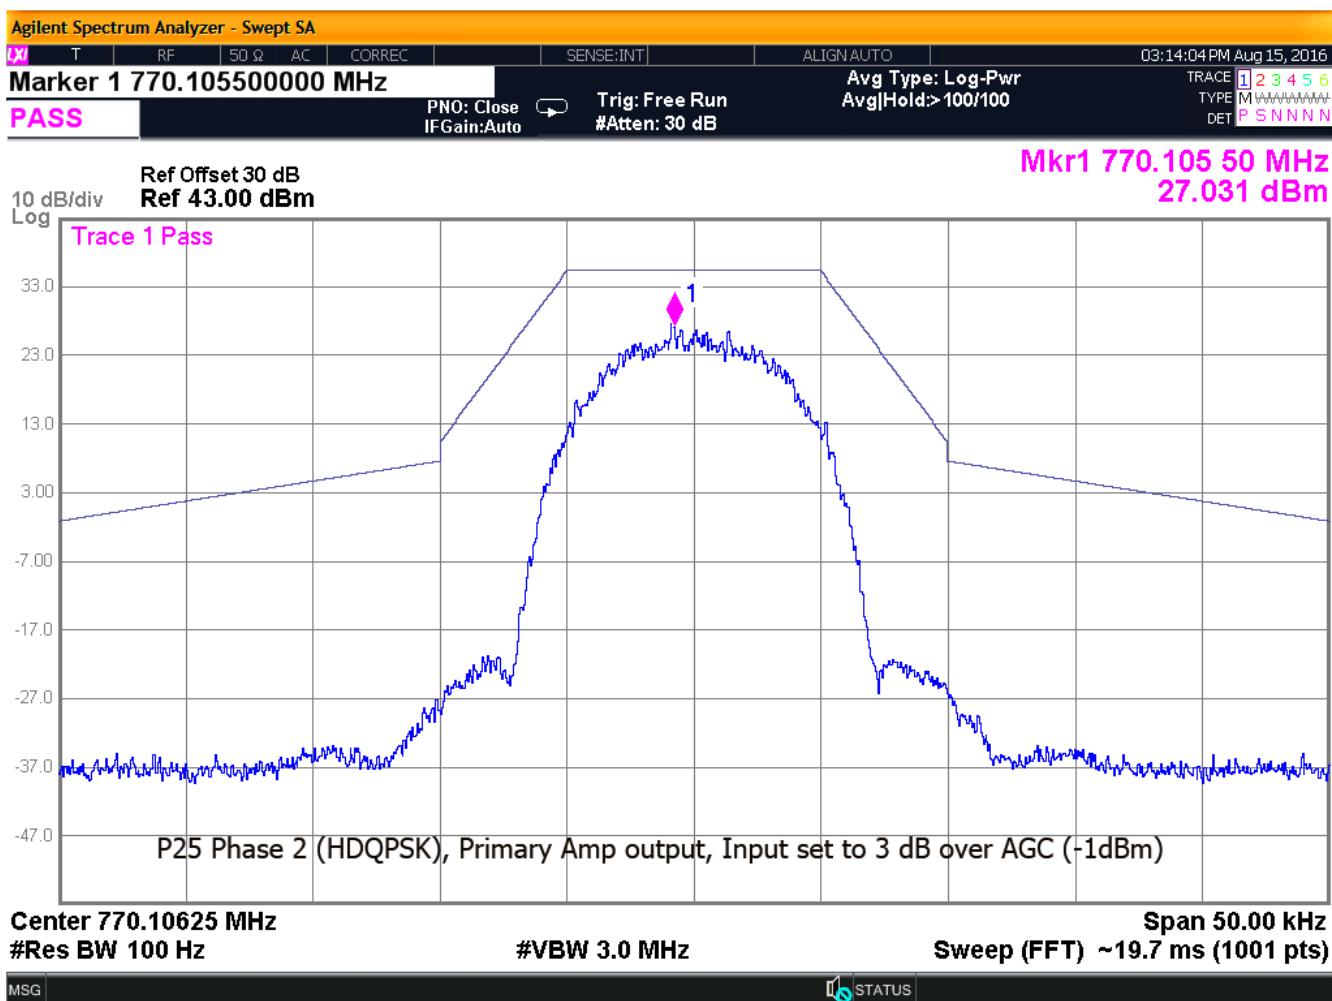


Figure 45: 769-775MHz, P25 Ph2 HDQPSK Output, Mask C- Primary Amp, 3dB over AGC

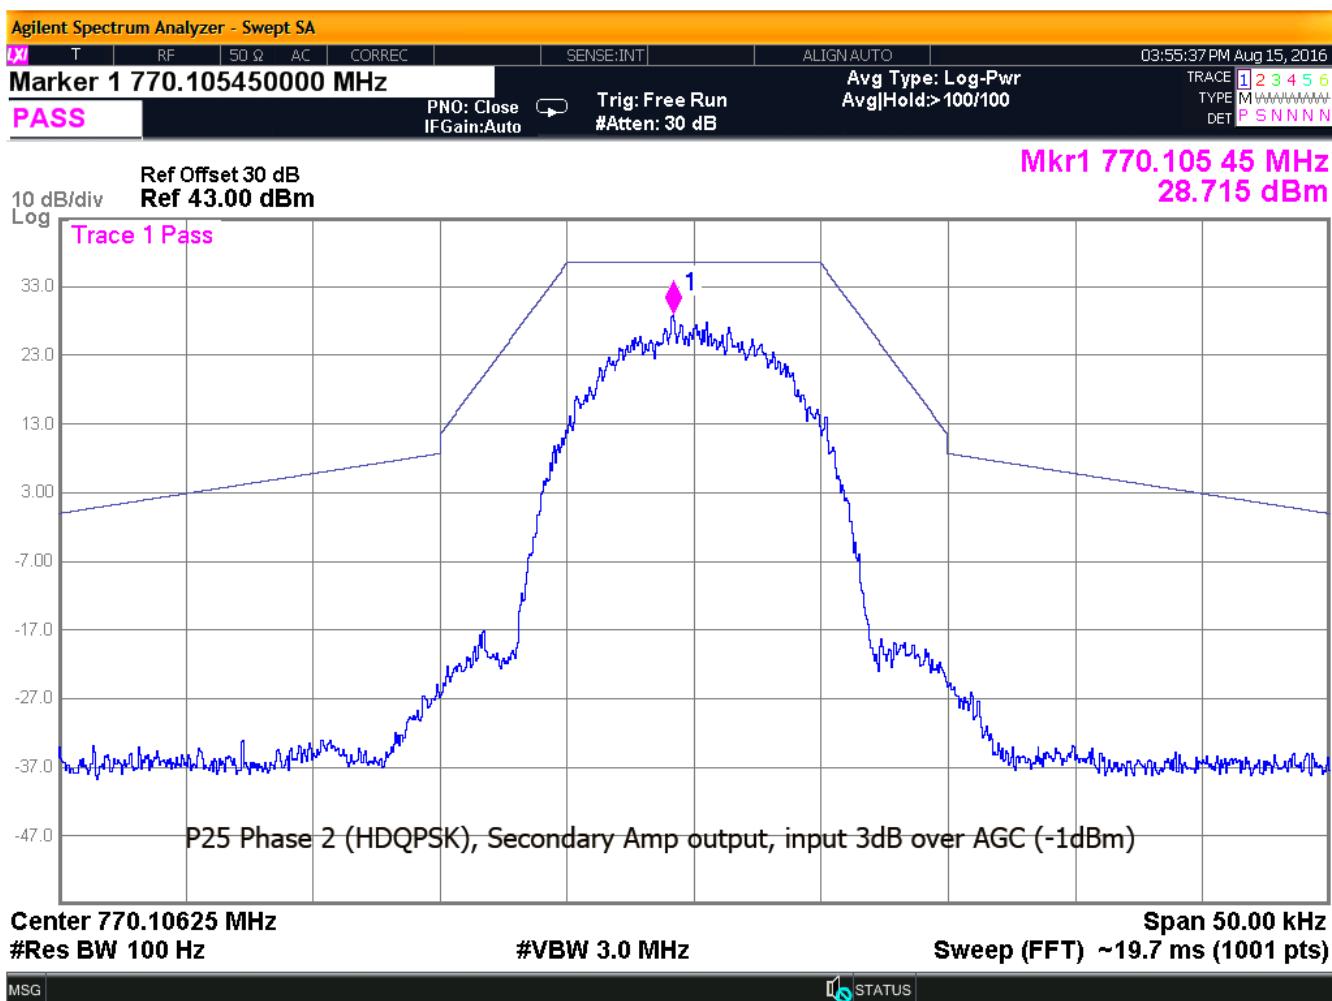


Figure 46: 769-775MHz, P25 Ph2 HDQPSK Output, Mask C- Secondary Amp, 3db over AGC

4.4 EUT input/output power and amplifier gain (935210 DO5 section 4.5)

Section 4.5 specifies the following measurement of mean input and output power of a PLMRS and/or PSRS amplifier, booster, or repeater, to compute the gain of the device.

Adjust the internal gain control of the equipment under test to the maximum gain for which the equipment certification is being sought. Any attenuation settings shall be set to their minimum setting. Input power levels (uplink and downlink) should be set to maximum input ratings while confirming that the device is not capable of operating in saturation (non-linear mode) at the rated input levels, including during the performance of the input/output power measurements.

Note: The EUT has no user attenuation or gain controls.

In addition to a CW signal the Gain was also tested with the following P25 modulations: Phase 1 LSM, Phase 1 CQPSK, Phase 1 C4FM, & Phase 2 HDQPSK. The AGC was set to 3200 for testing.

DO5-4.5.2 Measuring the EUT input and output power levels for determining amplifier/booster gain

The guidance of section 3.5.2 was used with the modifications listed in 4.5.2 a) through d):

DO5-3.5.2 Measuring the EUT mean input and output power

- a) Connect a signal generator to the input of the EUT.
- b) Configure to generate the AWGN (broadband) test signal.
- c) The frequency of the signal generator shall be set to the frequency of (f0) as determined from 3.4.
- d) Connect a spectrum analyzer or power meter to the output of the EUT using appropriate attenuation as necessary.
- e) Set the signal generator output power to a level that produces an EUT output level that is just below the AGC threshold (see 3.2), but not more than 0.5 dB below.
- f) Measure the output power of the EUT and record (see 3.5.3 or 3.5.4 for power measurement guidance).
- g) Remove the EUT from the measurement setup and using the same signal generator settings, repeat the power measurement on the input signal to the EUT and record as input power.
- h) Repeat the procedure with the narrowband test signal.
- i) Repeat the procedure for both test signals with input signal amplitude set to 3 dB above the AGC threshold level.

j) Repeat for all frequency bands authorized for use by the EUT.

Required Modifications per Guidance:

- a) Configure the signal generator for CW operation instead of AWGN,
- b) Select the analyzer positive peak detector instead of the power averaging (rms) detector,
- c) Activate the max hold function instead of the trace average function,
- d) Use in conjunction with guidance provided in 4.5.3.

DO5-4.5.3 Method 1: Power measurement with a spectrum or signal analyzer

- a) Set the frequency span to at least 1 MHz.
- b) Set the resolution bandwidth to 100 kHz
- c) Set the video bandwidth to $\geq 3 \times \text{RBW}$.
- d) Set the detector to PEAK and trace mode to MAX HOLD.
- e) Place a marker on the peak of the signal and record the value as the maximum power.

DO5-4.5.5 Calculating the amplifier, booster, or repeater gain

After the input and output power levels have been measured as described above, the gain of the EUT can be determined from:

$$\text{Gain (dB)} = \text{output power (dBm)} - \text{input power (dBm)}.$$

4.4.1 Results:

See Table 7 for tabular gain results. See Figure 47 through Figure 52 for the plots which support the tabular data.

The EUT is AGC limited and cannot operate in a non-linear saturated mode.

In accordance with FCC part 90.219(e) (1) the maximum power out is less than 5Watts ERP as the conducted maximum is 36.84dBm (4.8Watts), In addition the antenna to be used is a lossy cable that will have a negative gain.

Table 7: Input/ Output Power and Amplifier Gain

CW Mode

Amplifier	Output (dBm)	Input (dBm)	Gain (dB)
769-775MHz Primary	35.570	-4.490 (below AGC)	40.060
769-775MHz Secondary	36.410	-4.490 (below AGC)	40.900
769-775MHz Primary	35.690	-1.04 (above AGC)	36.730
769-775MHz Secondary	36.520	-1.04 (above AGC)	37.560

P25 P1 C4FM

Amplifier	Output (dBm)	Input (dBm)	Gain (dB)
700MHz Primary	34.194	-4.482	38.676
700 MHz Secondary	34.800	-4.482	39.282
700MHz Primary	34.196	-1.069	35.265
700 MHz Secondary	36.67	-1.069	37.739

P25 P1 CQPSK

Amplifier	Output (dBm)	Input (dBm)	Gain (dB)
700MHz Primary	36.624	-4.462	41.086
700 MHz Secondary	36.673	-4.462	41.135
700MHz Primary	36.917	-0.990	37.907
700 MHz Secondary	36.97	-0.990	37.960

P25 P1 LSM

Amplifier	Output (dBm)	Input (dBm)	Gain (dB)
700MHz Primary	36.010	-4.429	40.439
700 MHz Secondary	36.595	-4.429	41.024
700MHz Primary	36.949	-0.914	37.863
700 MHz Secondary	36.921	-0.914	37.835

P25 P2 HD QPSK

Amplifier	Output (dBm)	Input (dBm)	Gain (dB)
700MHz Primary	35.934	-4.478	40.412
700 MHz Secondary	36.516	-4.478	40.994
700MHz Primary	36.843	-0.999	37.842
700 MHz Secondary	36.674	-0.999	37.673

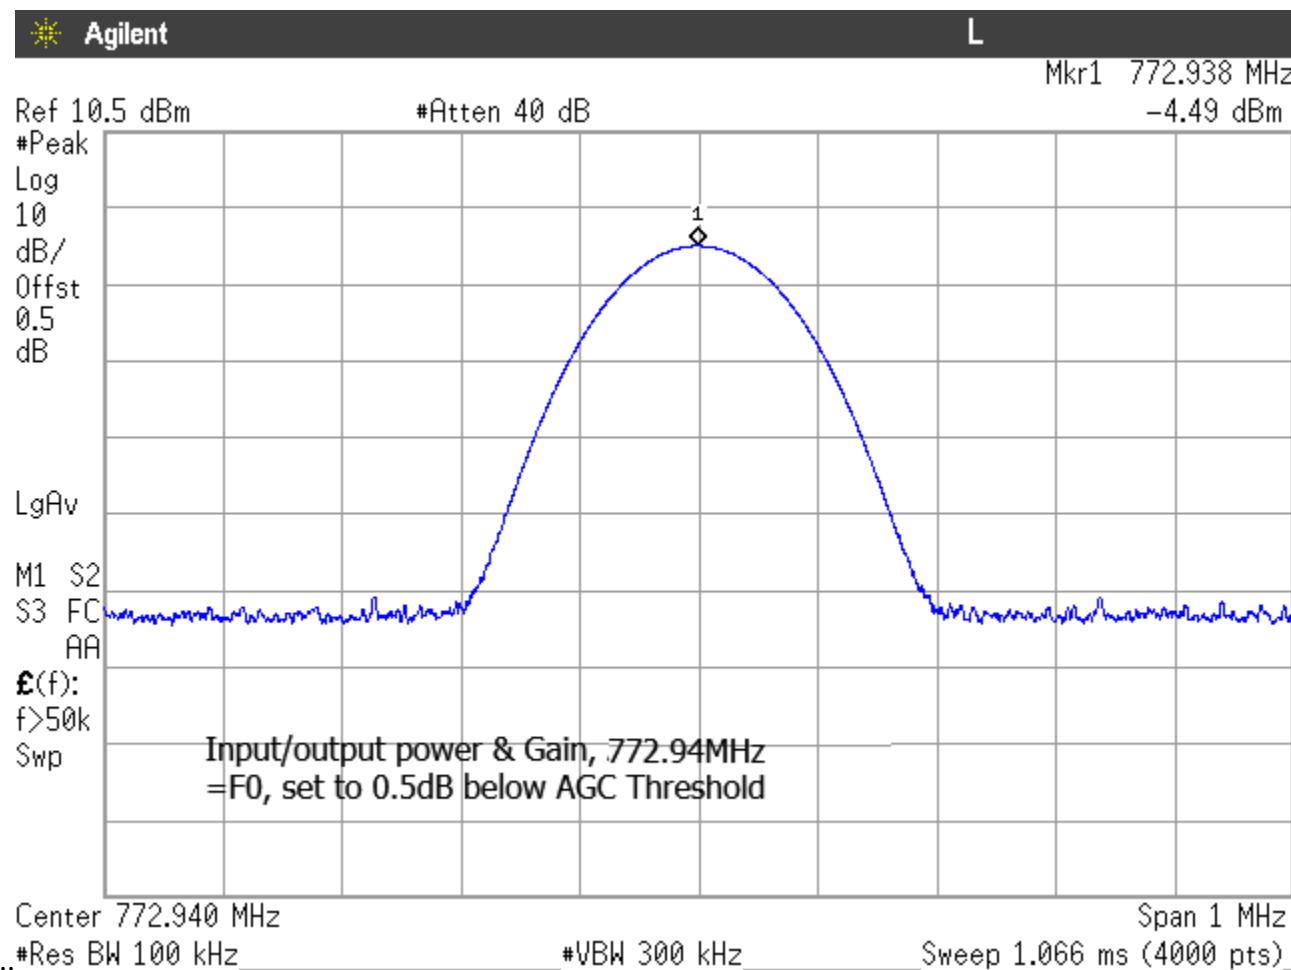


Figure 47: Power/Gain-769-775MHz Input set below AGC threshold

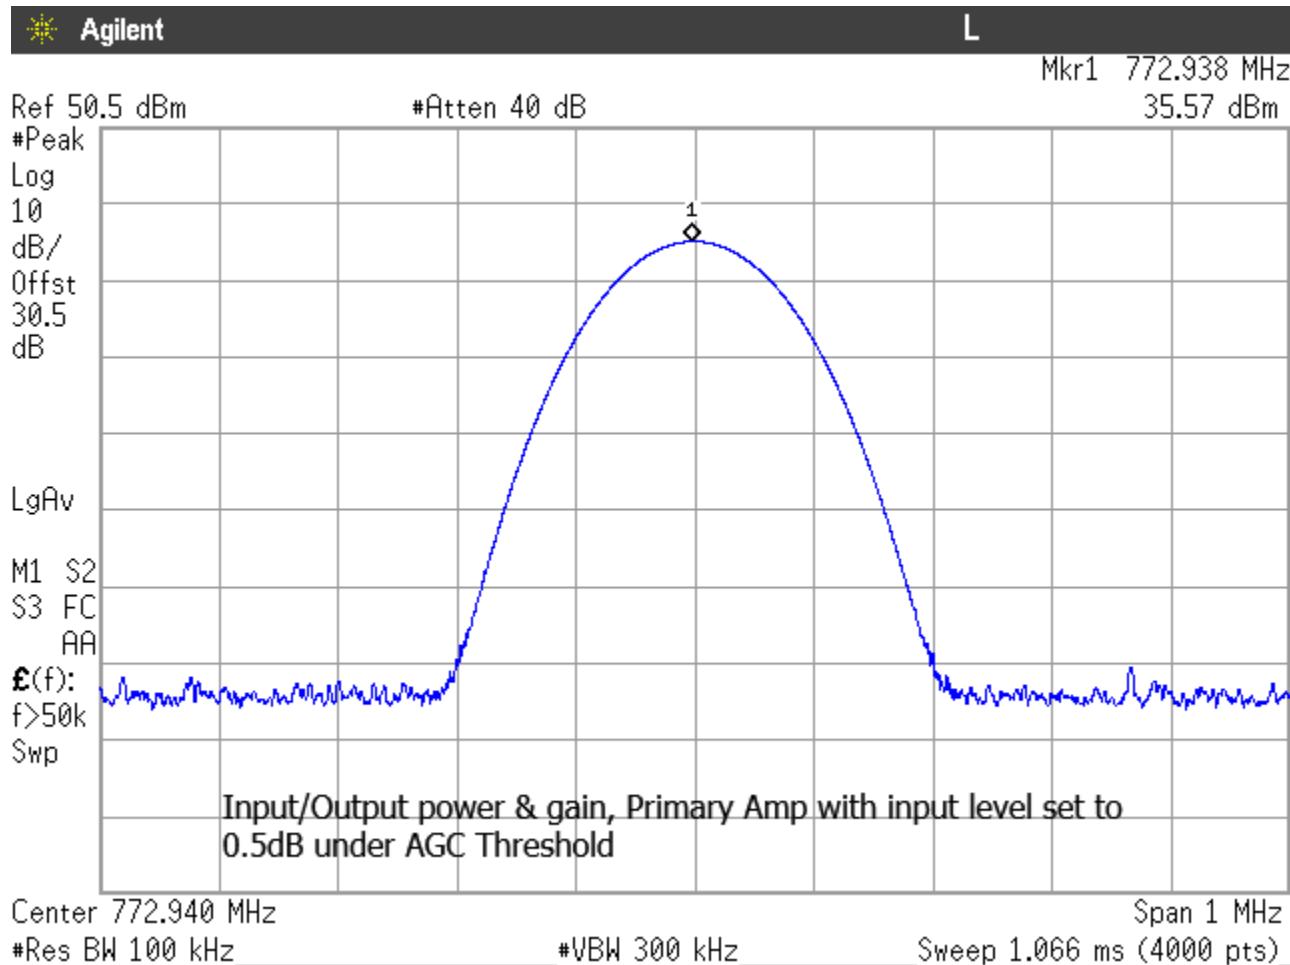


Figure 48: Power/Gain-769-775MHz Output set below AGC threshold-Primary Amp

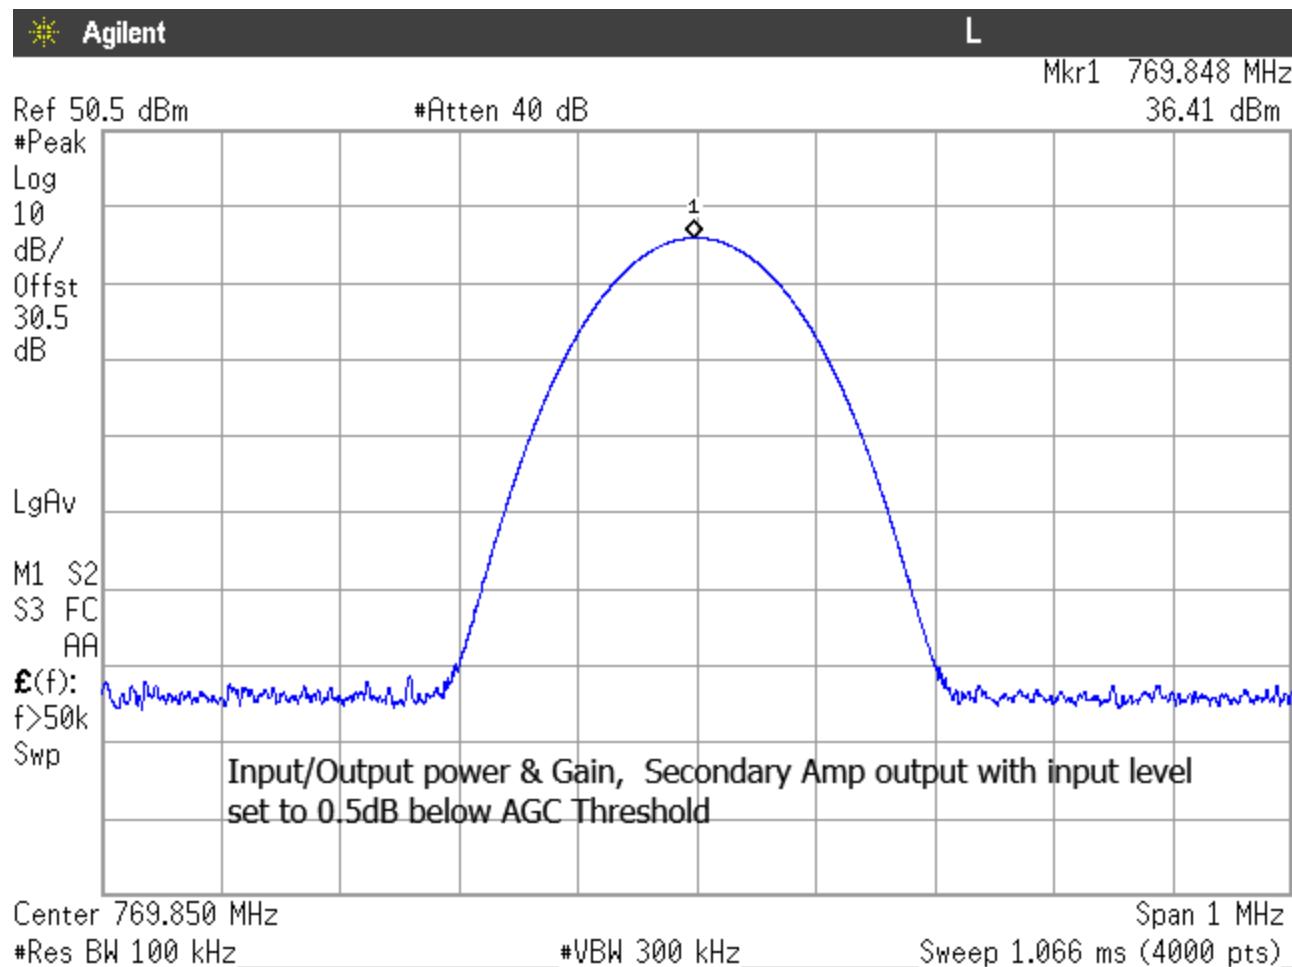


Figure 49 Power/Gain-769-775MHz Output set below AGC threshold-Secondary Amp

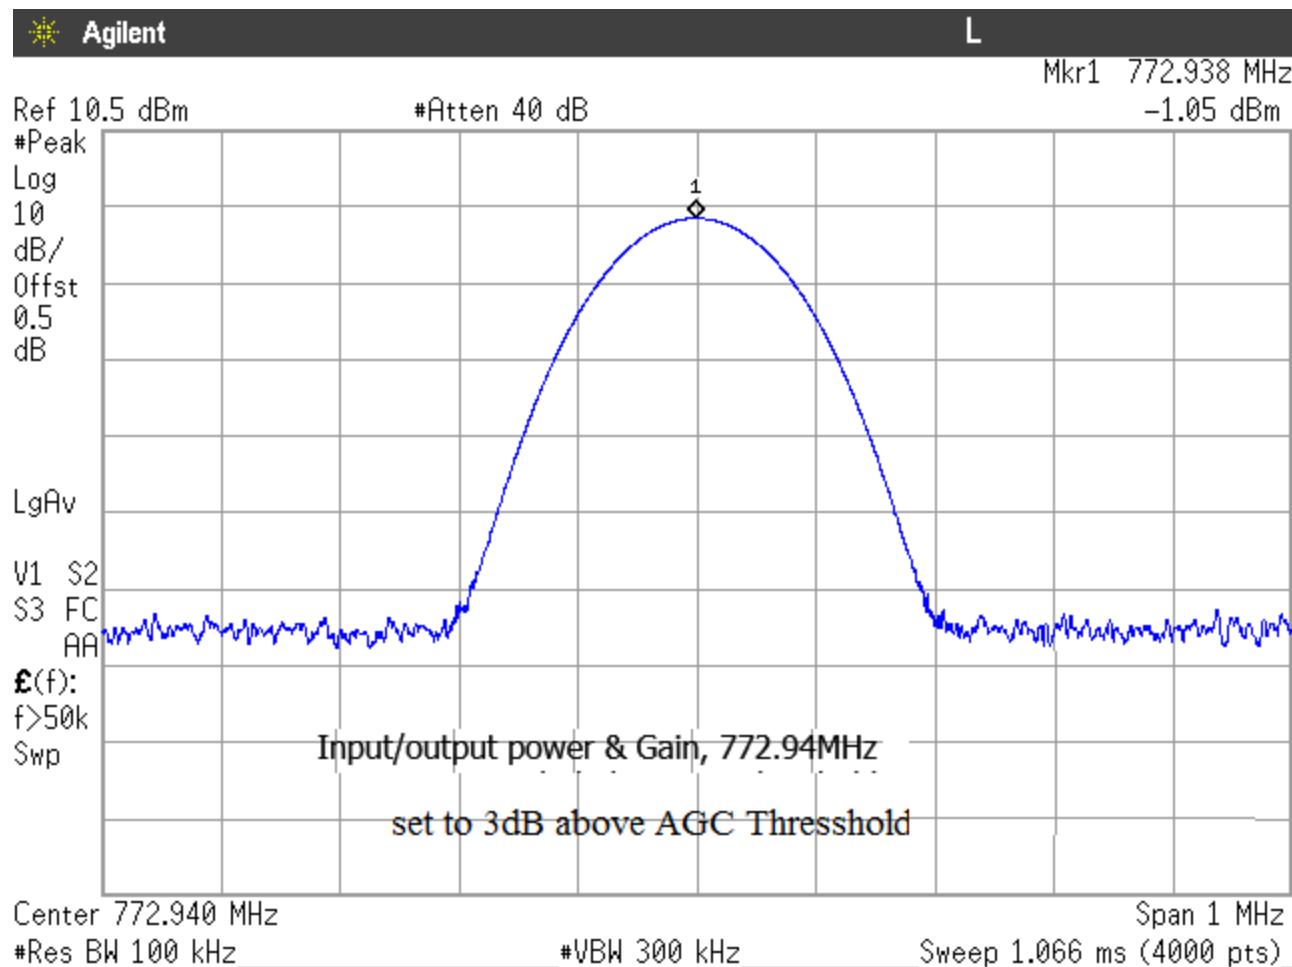


Figure 50: Power/Gain-769-775MHz Input set 3dB above AGC threshold

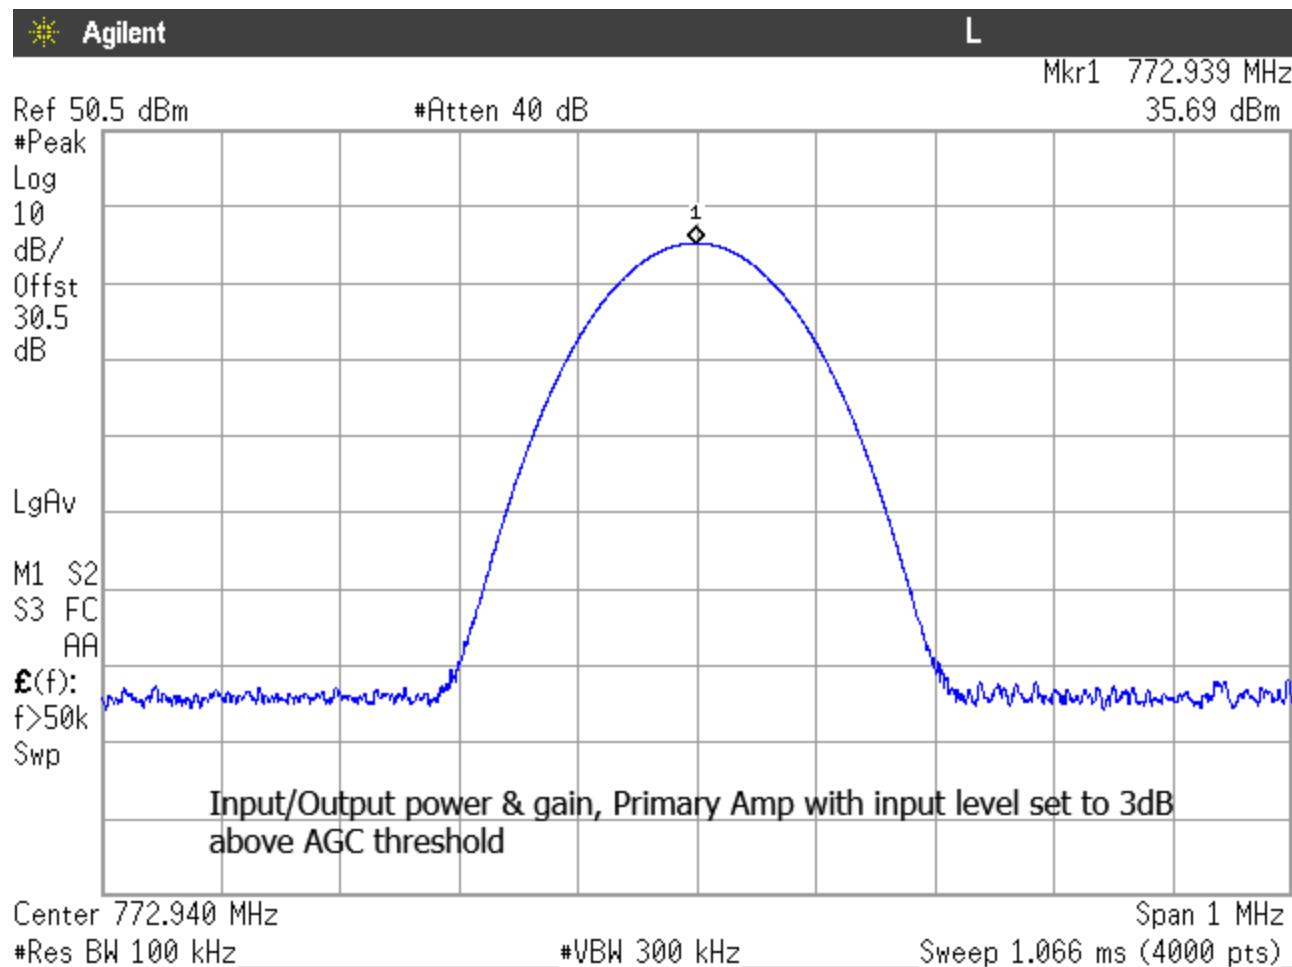


Figure 51: Power/Gain-769-775MHz Output set 3dB above threshold-Primary Amp

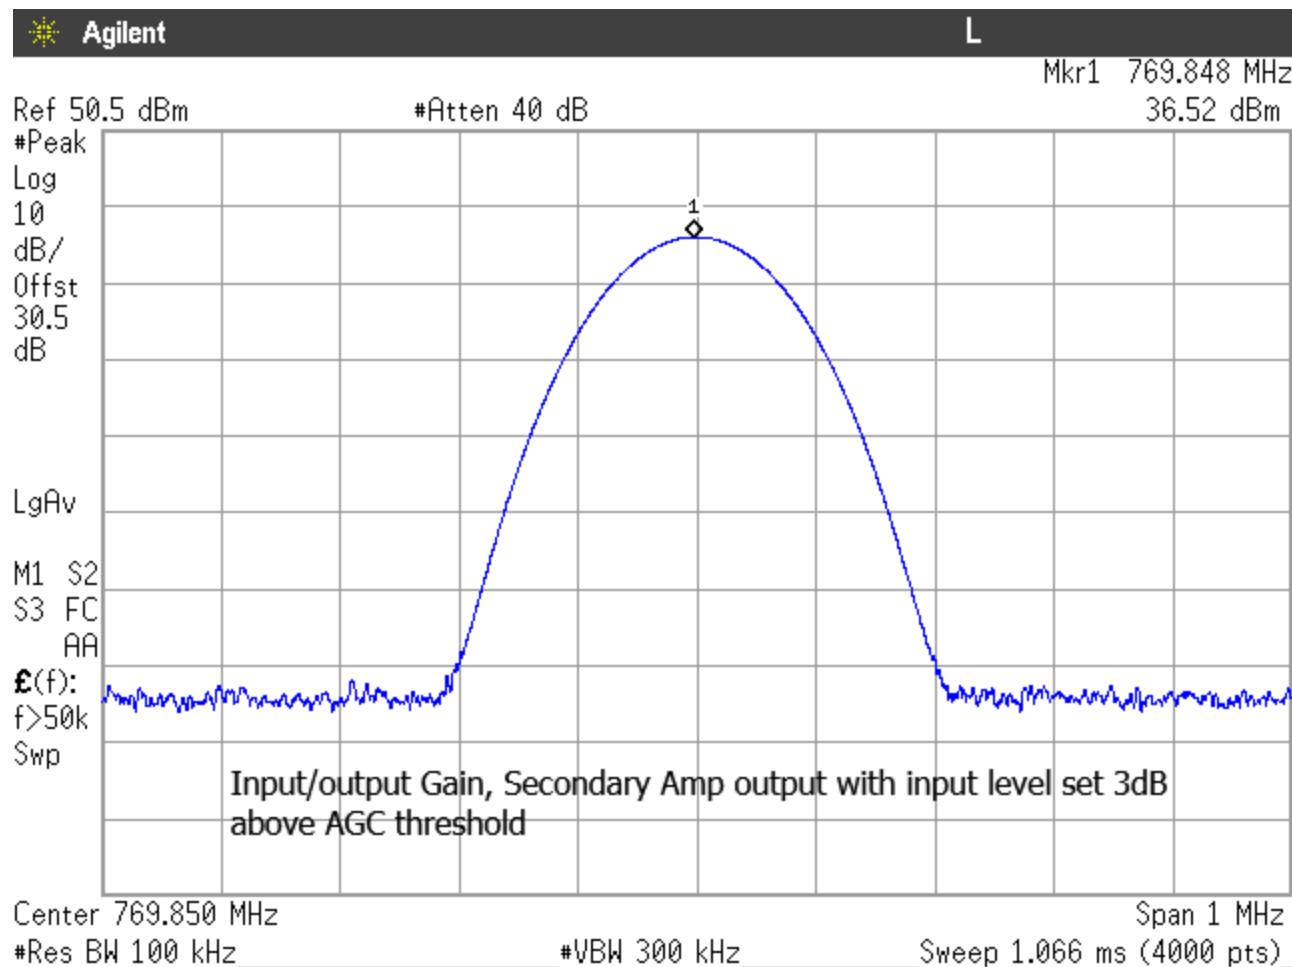


Figure 52 Power/Gain-769-775MHz Output set 3dB above threshold-Secondary Amp

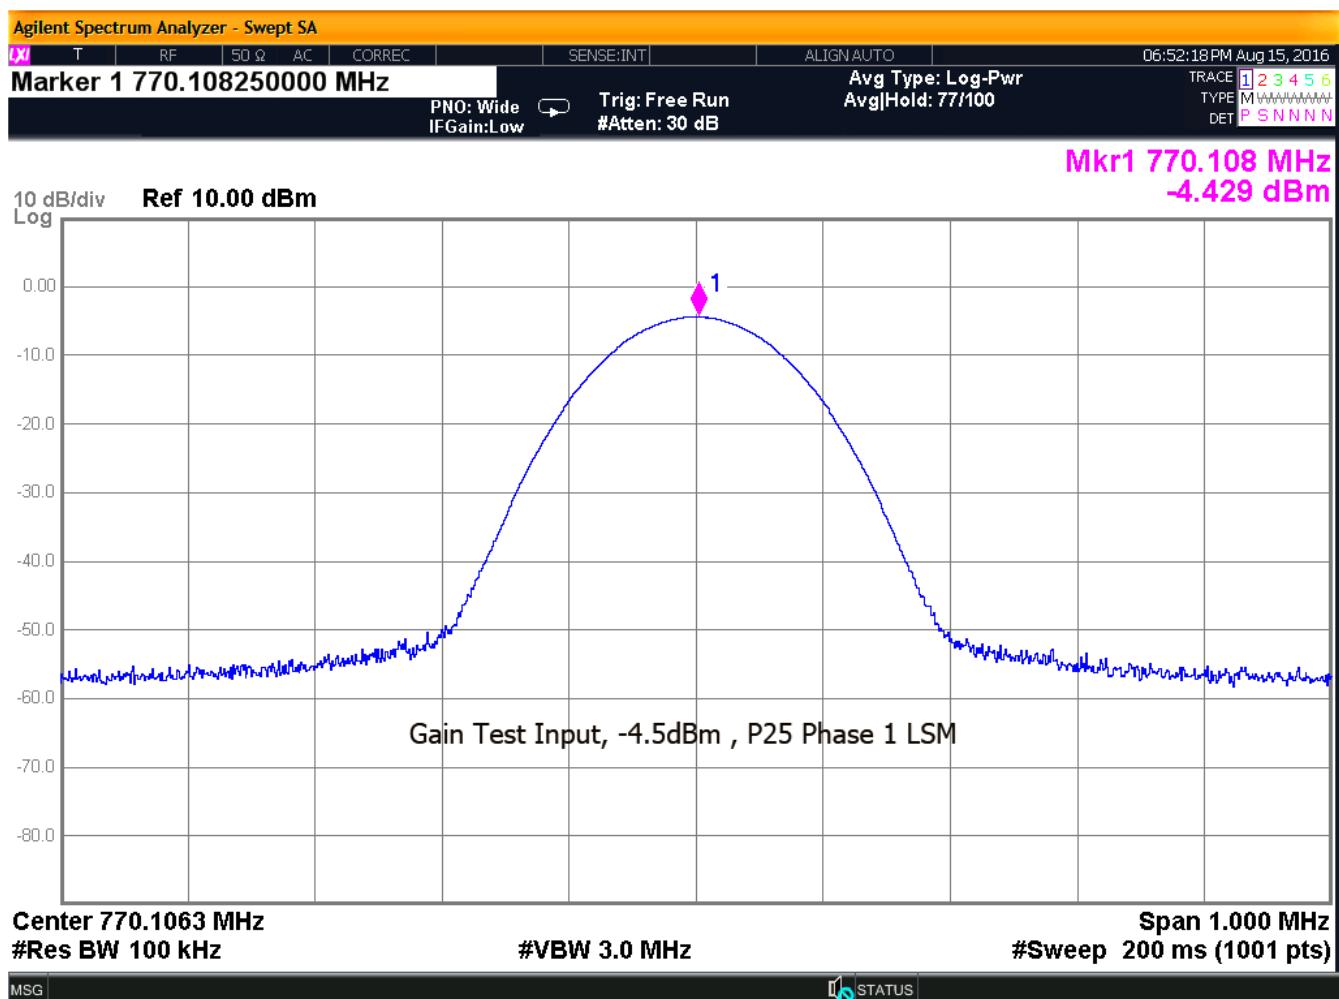


Figure 53 Power/Gain-P25 Ph1 LSM input set below threshold

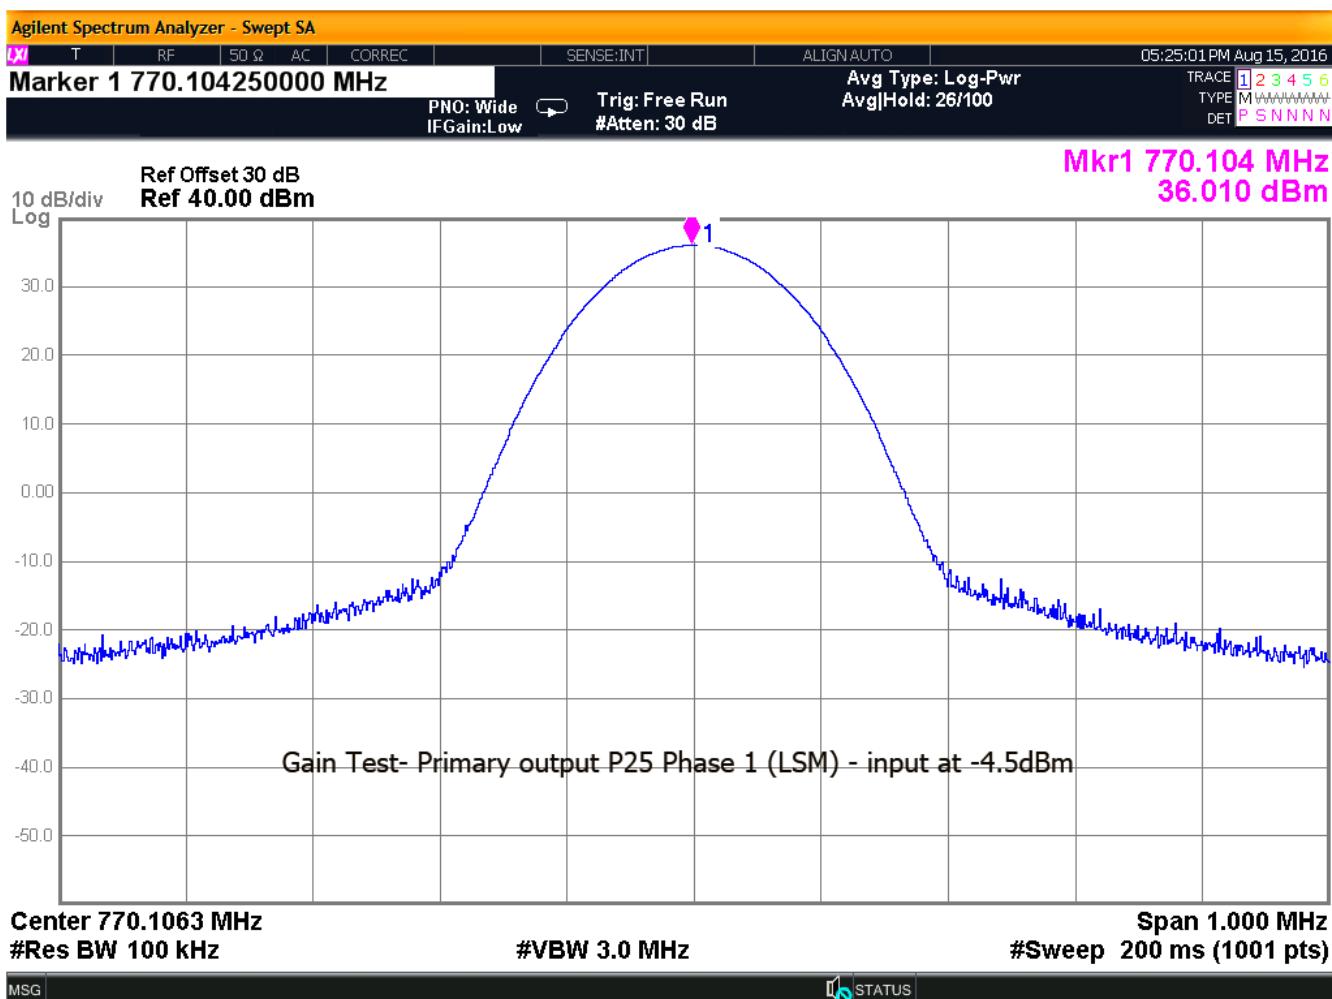


Figure 54 Power/Gain- P25 Ph1 LSM Output set below threshold-Primary Amp

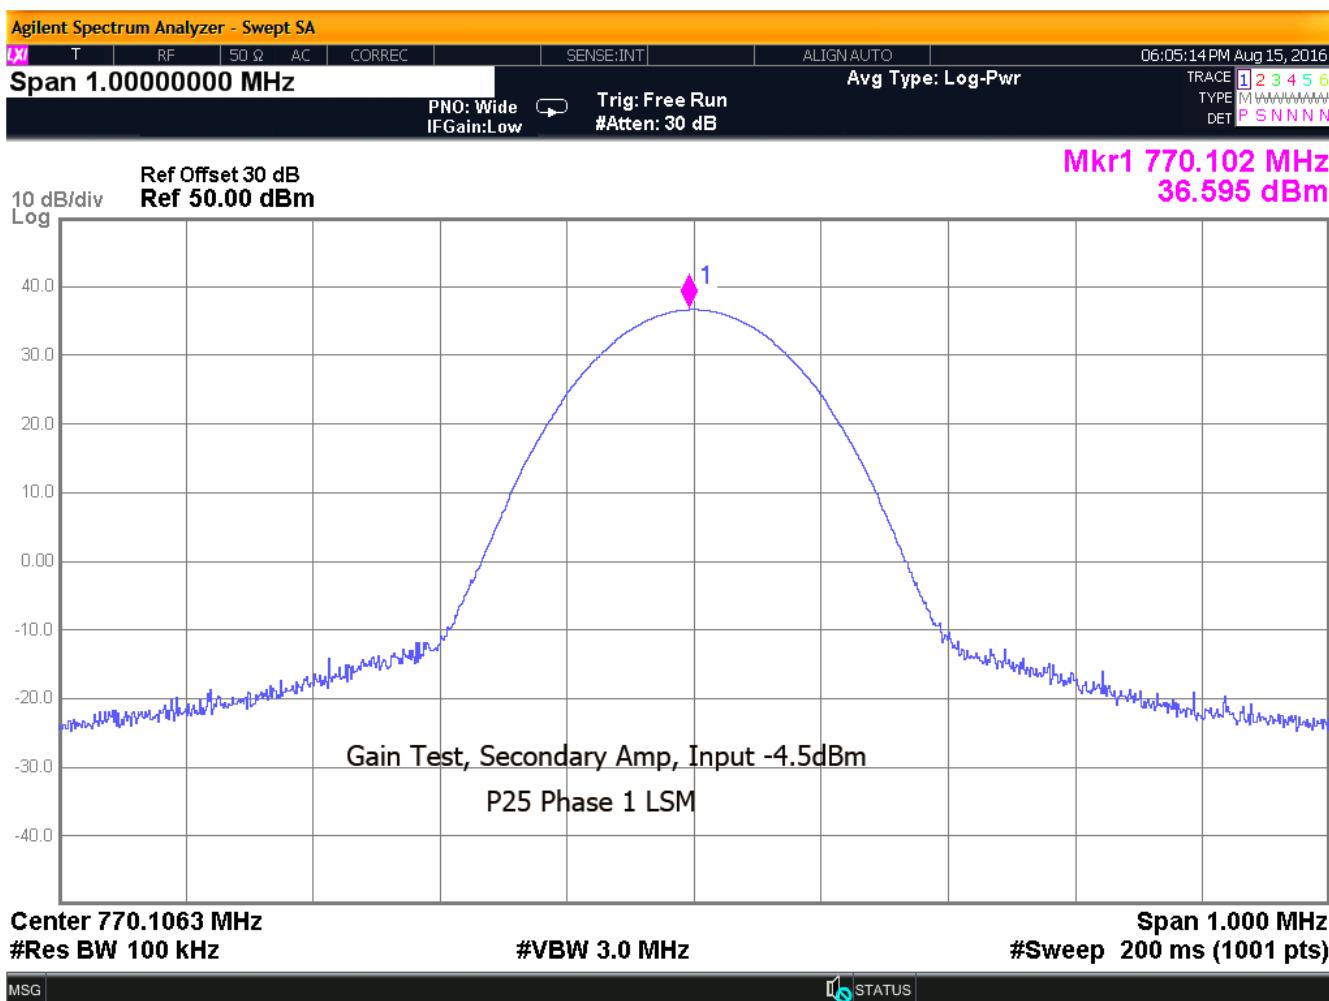


Figure 55 Power/Gain- P25 Ph1 LSM Output set below threshold-Secondary Amp

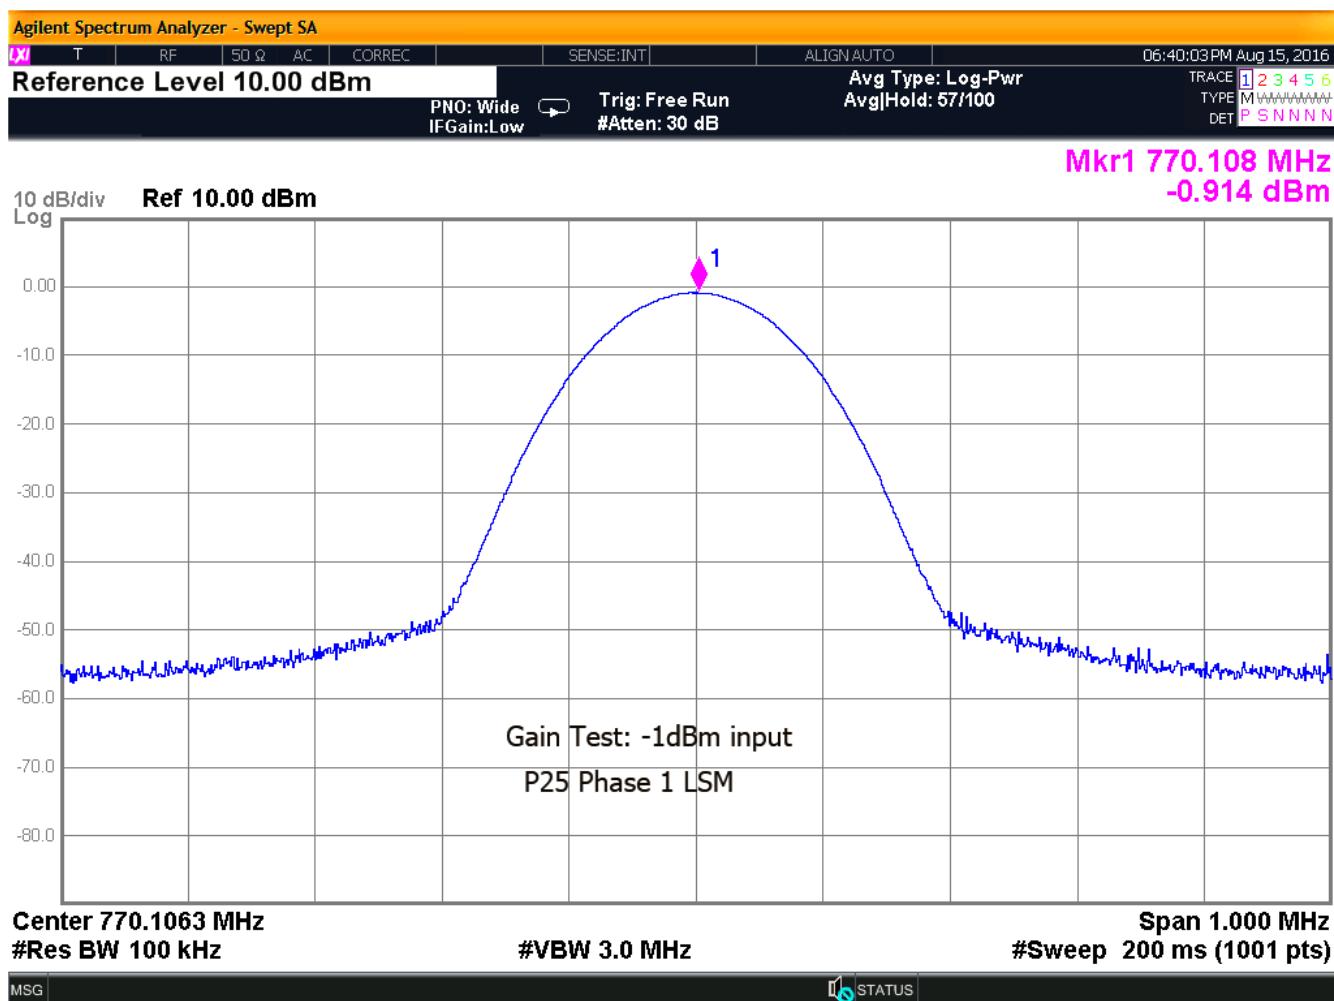


Figure 56 Power/Gain-P25 Ph1 LSM input set above threshold

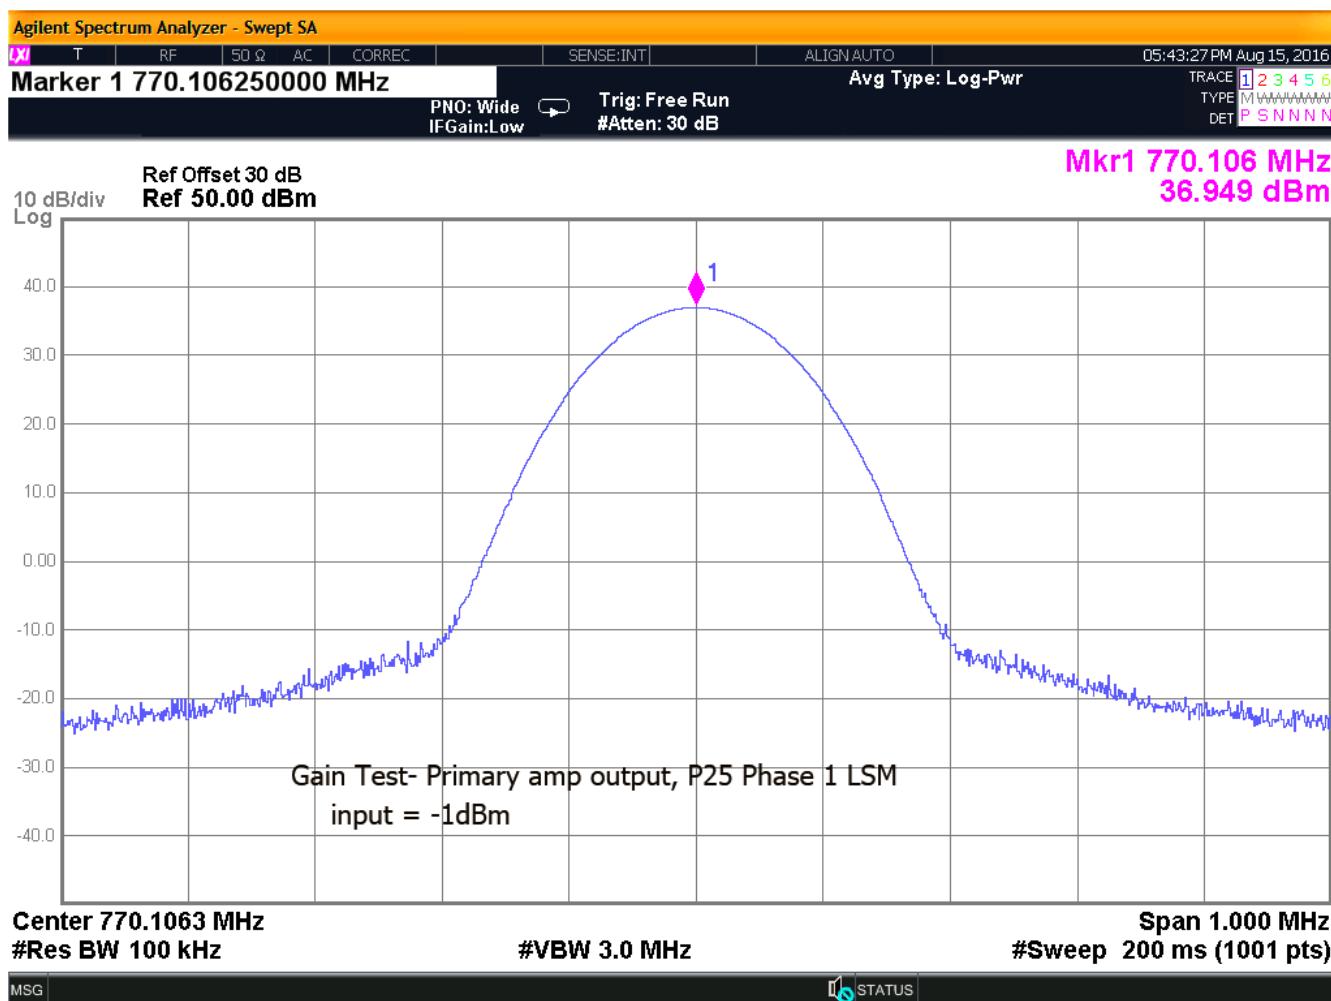


Figure 57 Power/Gain- P25 Ph1 LSM Output set above threshold-Primary Amp

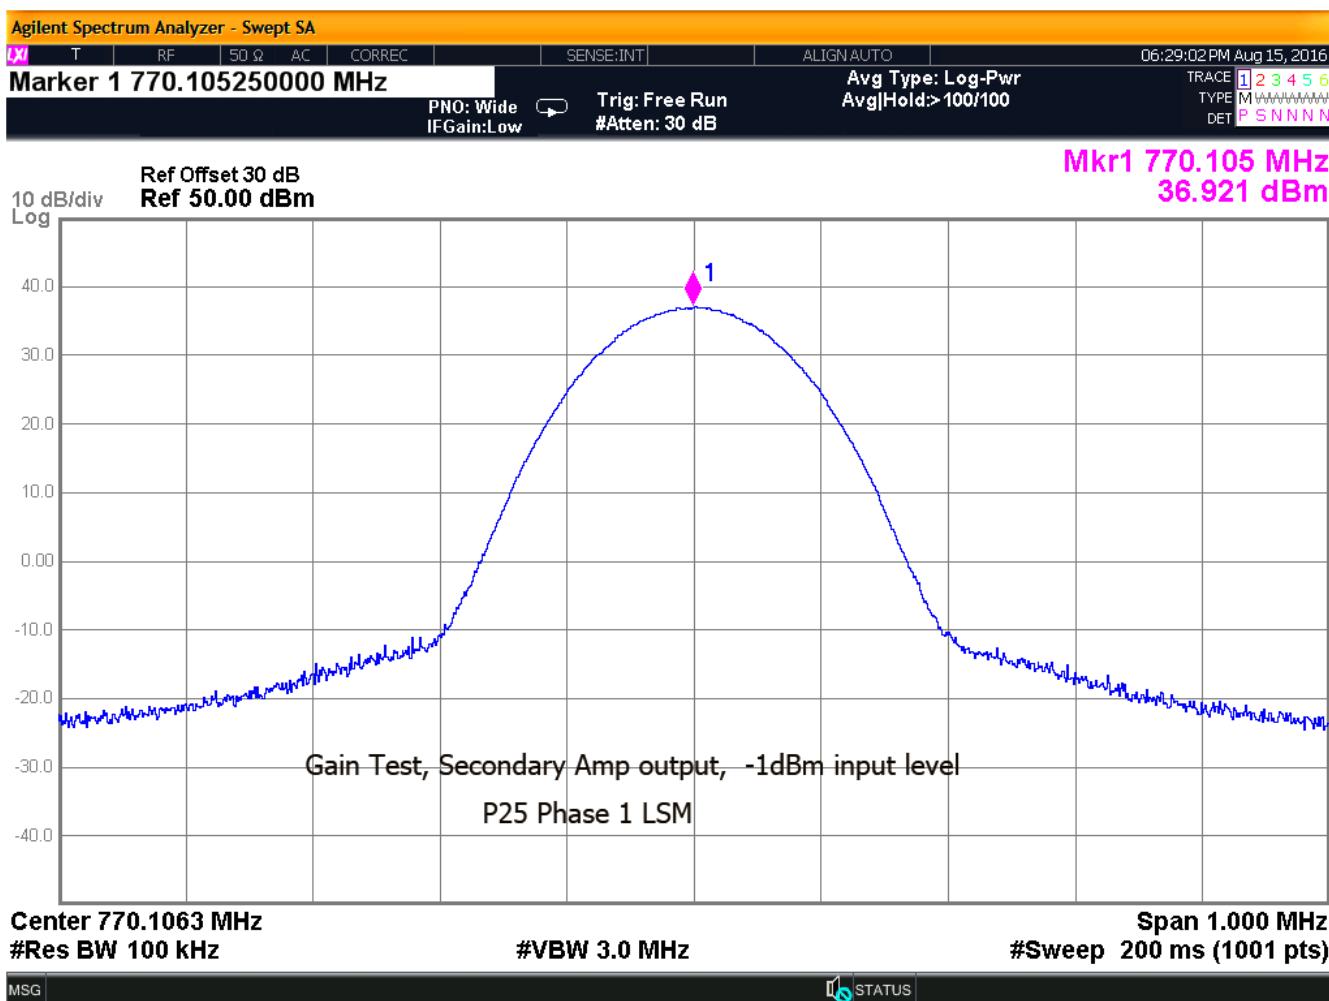


Figure 58 Power/Gain- P25 Ph1 LSM Output set above threshold-Secondary Amp

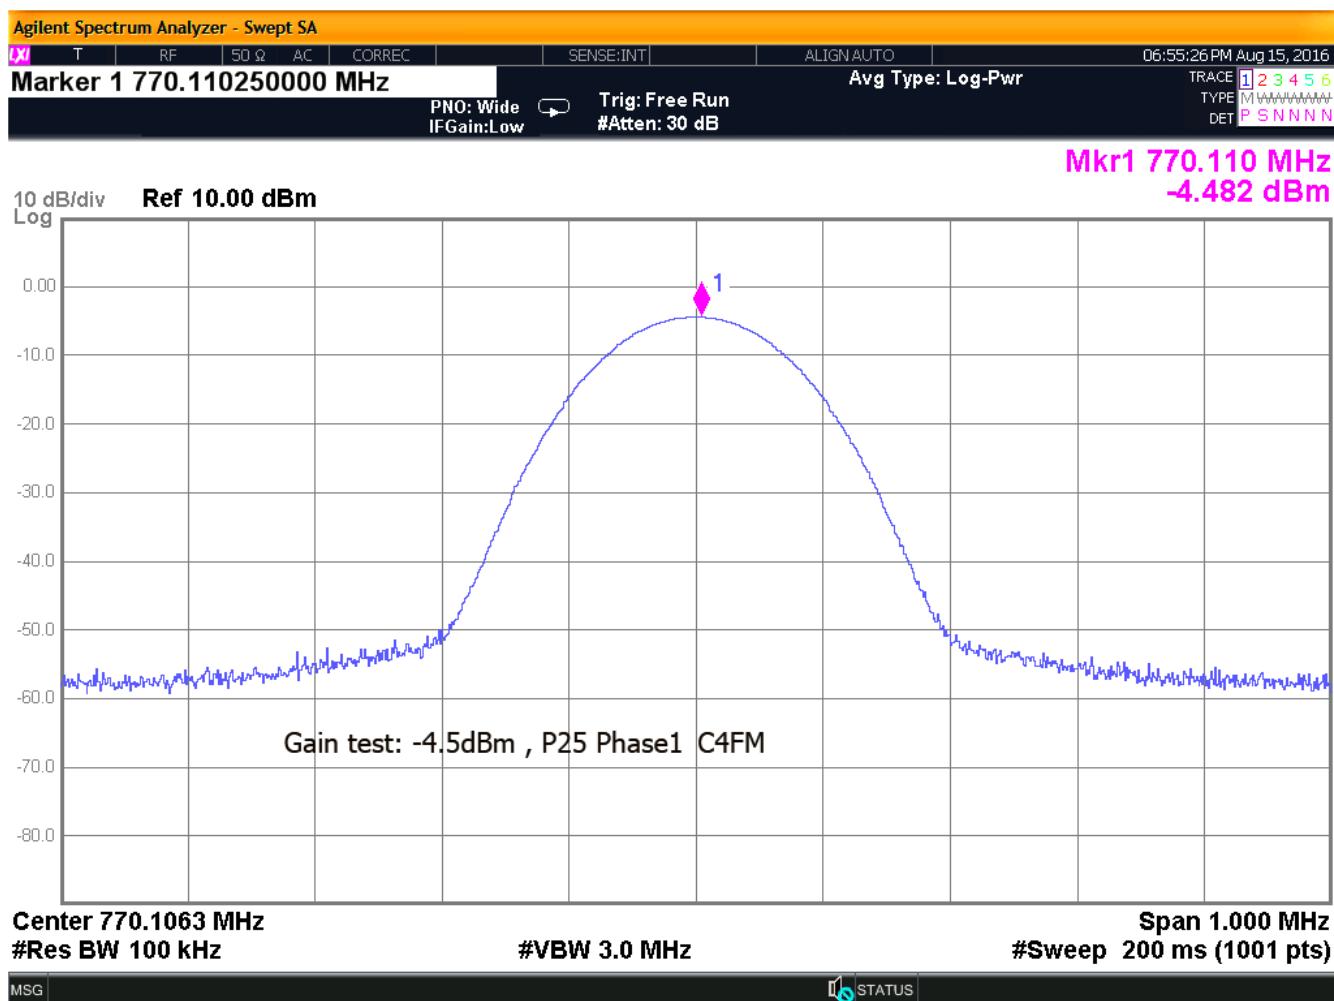


Figure 59 Power/Gain-P25 Ph1 C4FM input set below threshold

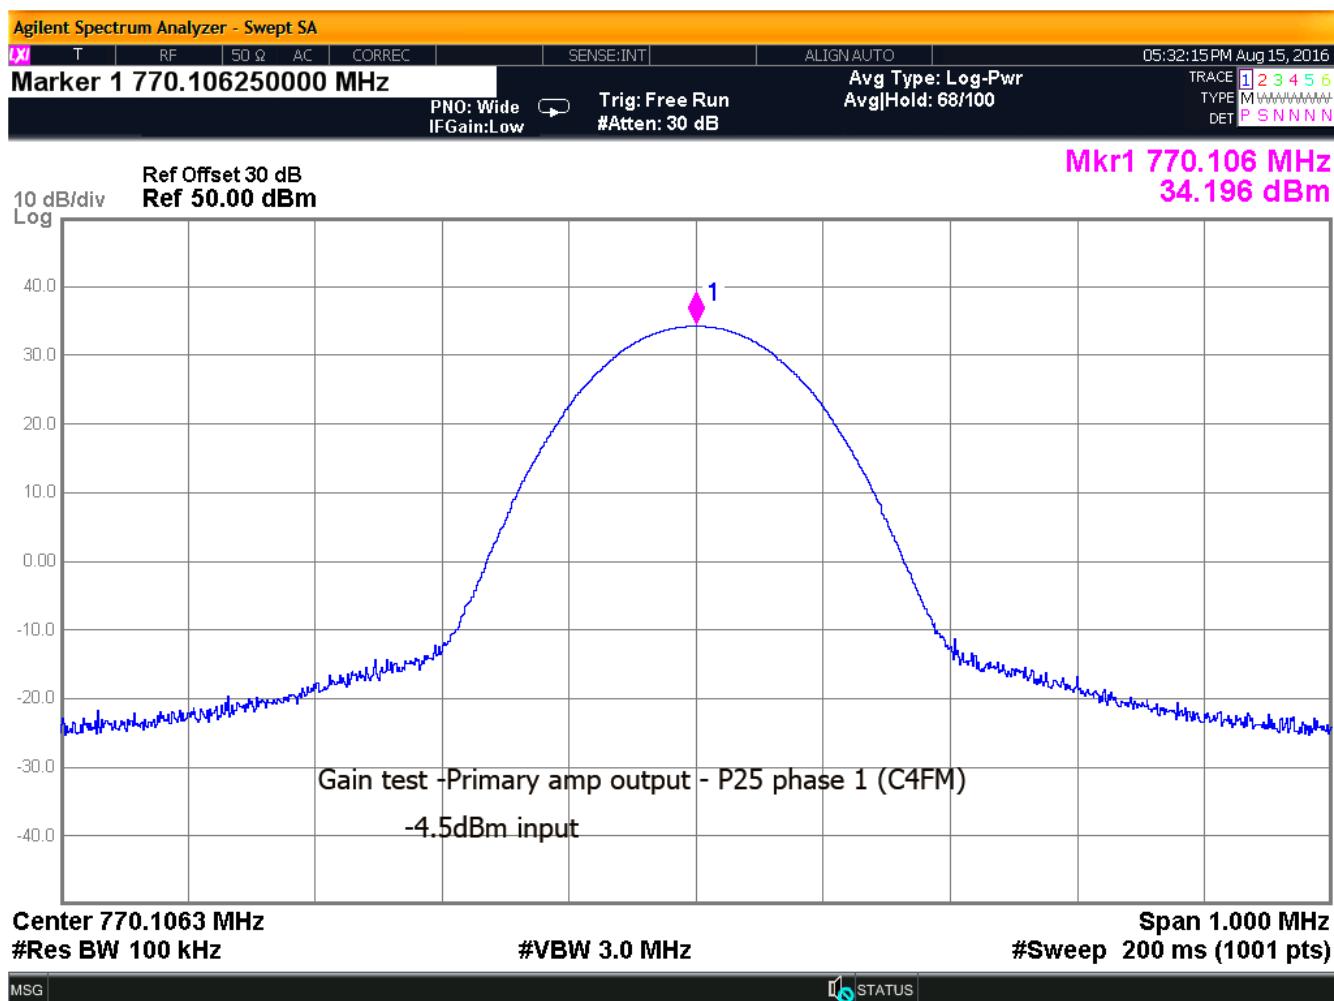


Figure 60 Power/Gain- P25 Ph1 C4FM Output set below threshold-Primary Amp

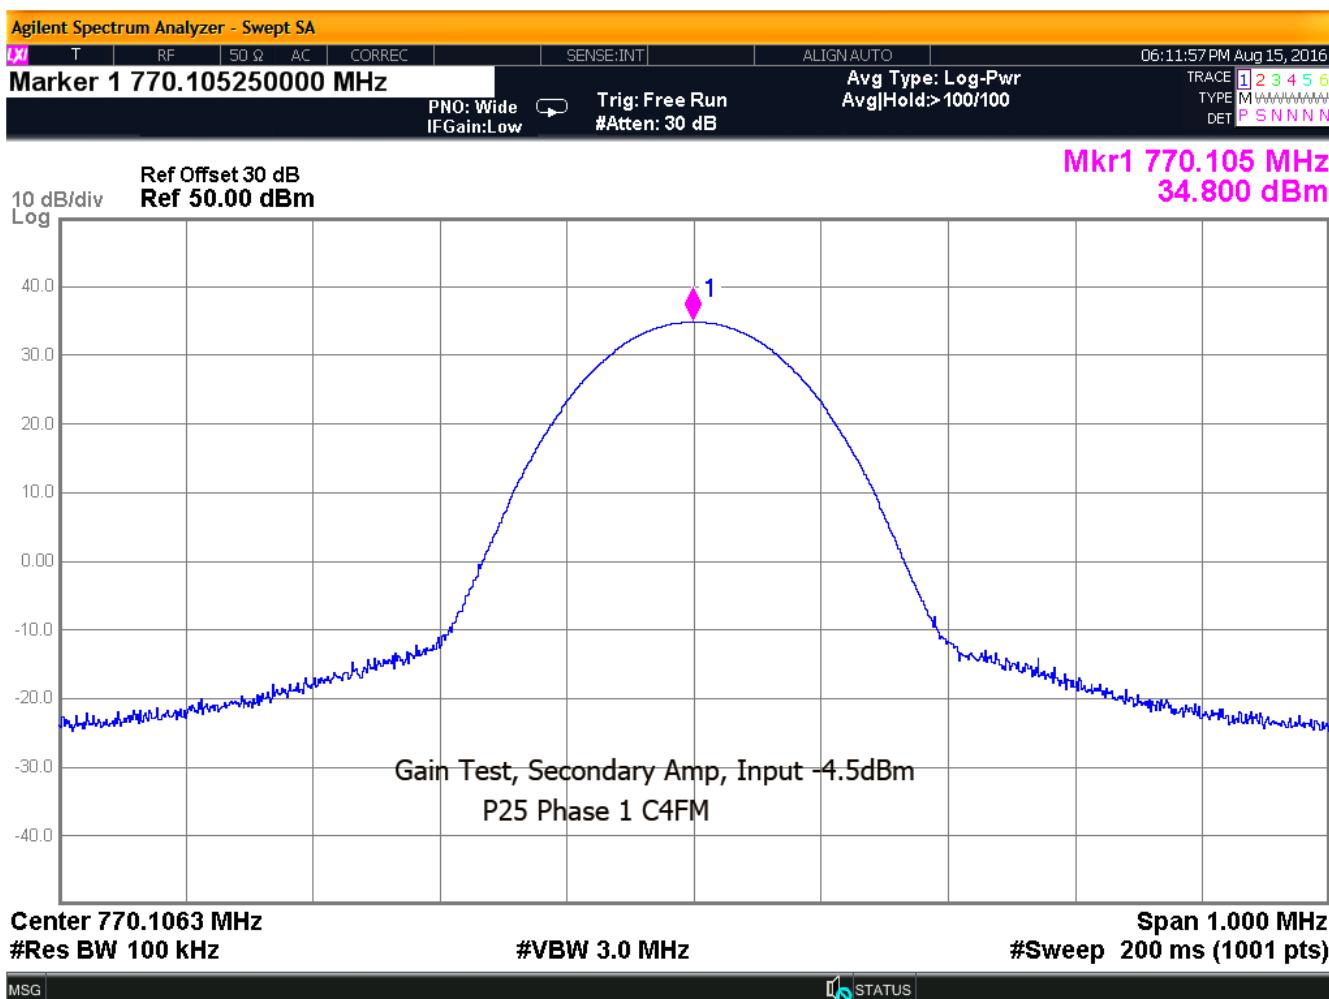


Figure 61 Power/Gain- P25 Ph1 C4FM Output set below threshold-Secondary Amp

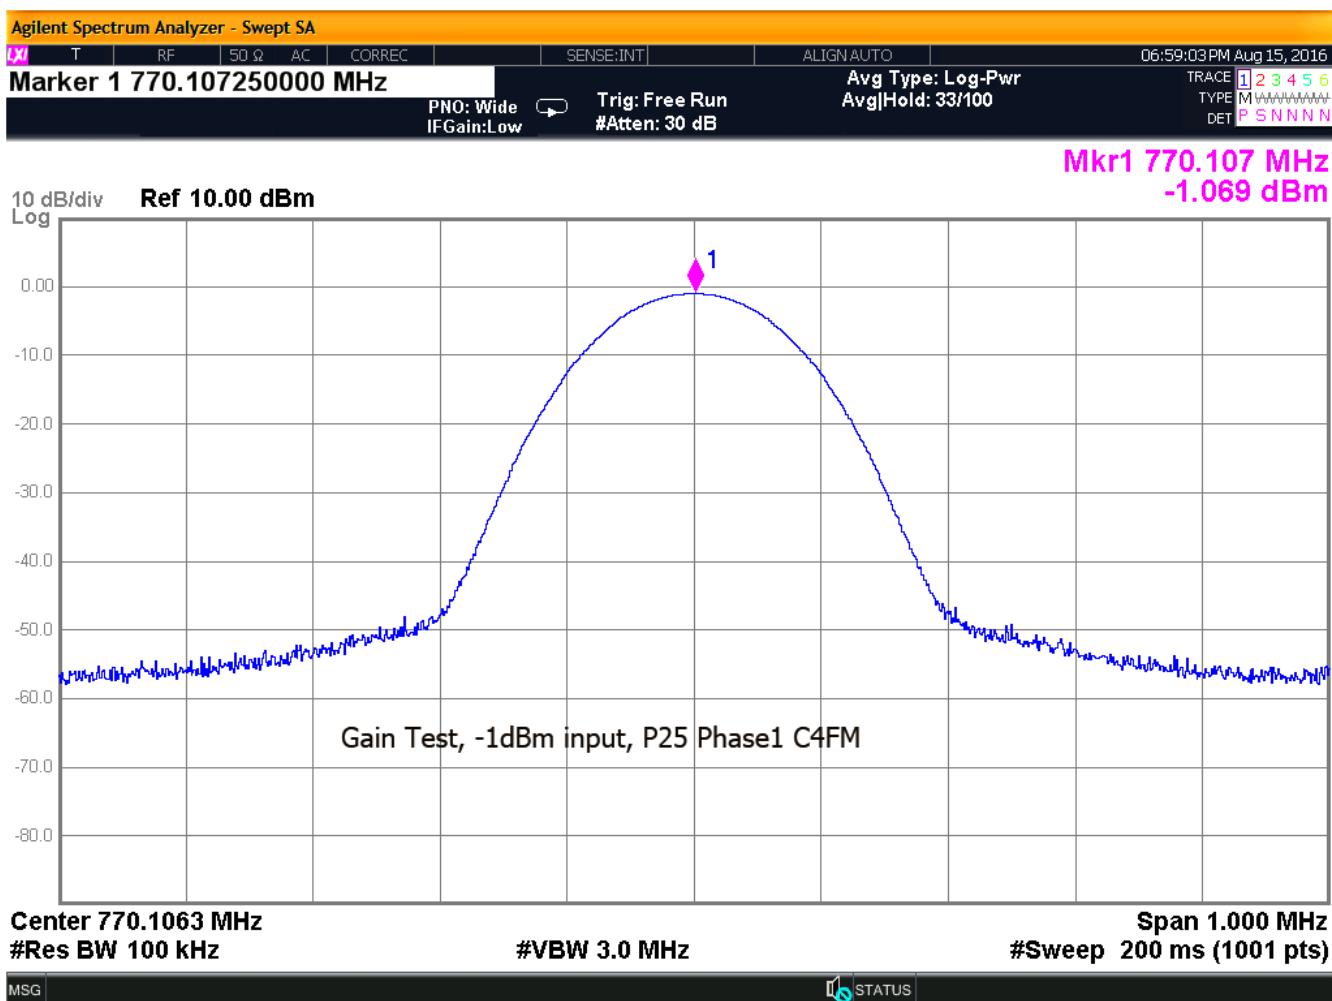


Figure 62 Power/Gain-P25 Ph1 C4FM input set above threshold

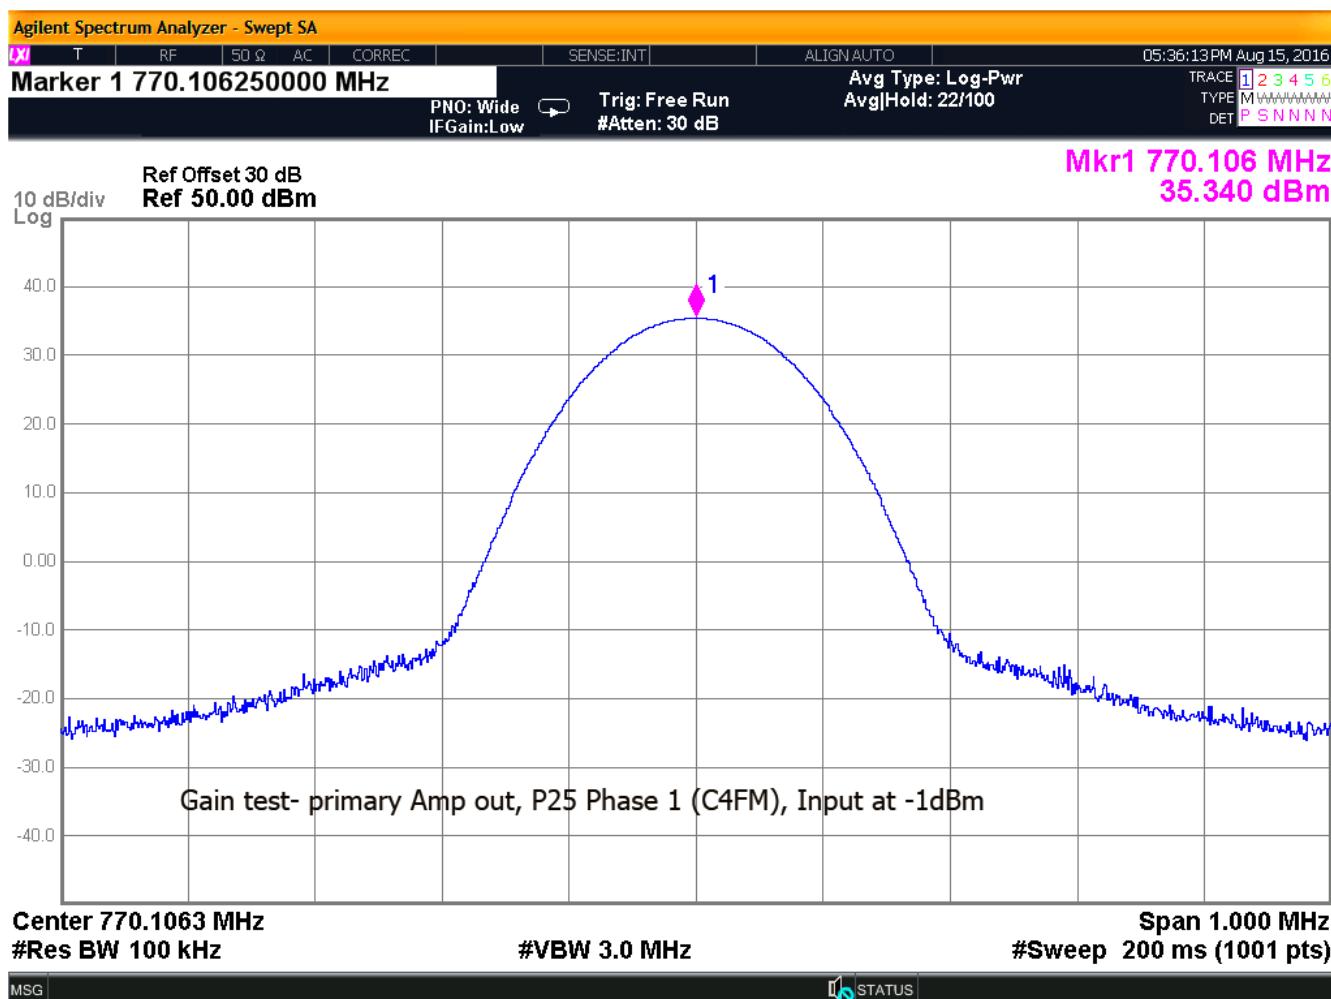


Figure 63 Power/Gain- P25 Ph1 C4FM Output set above threshold-Primary Amp

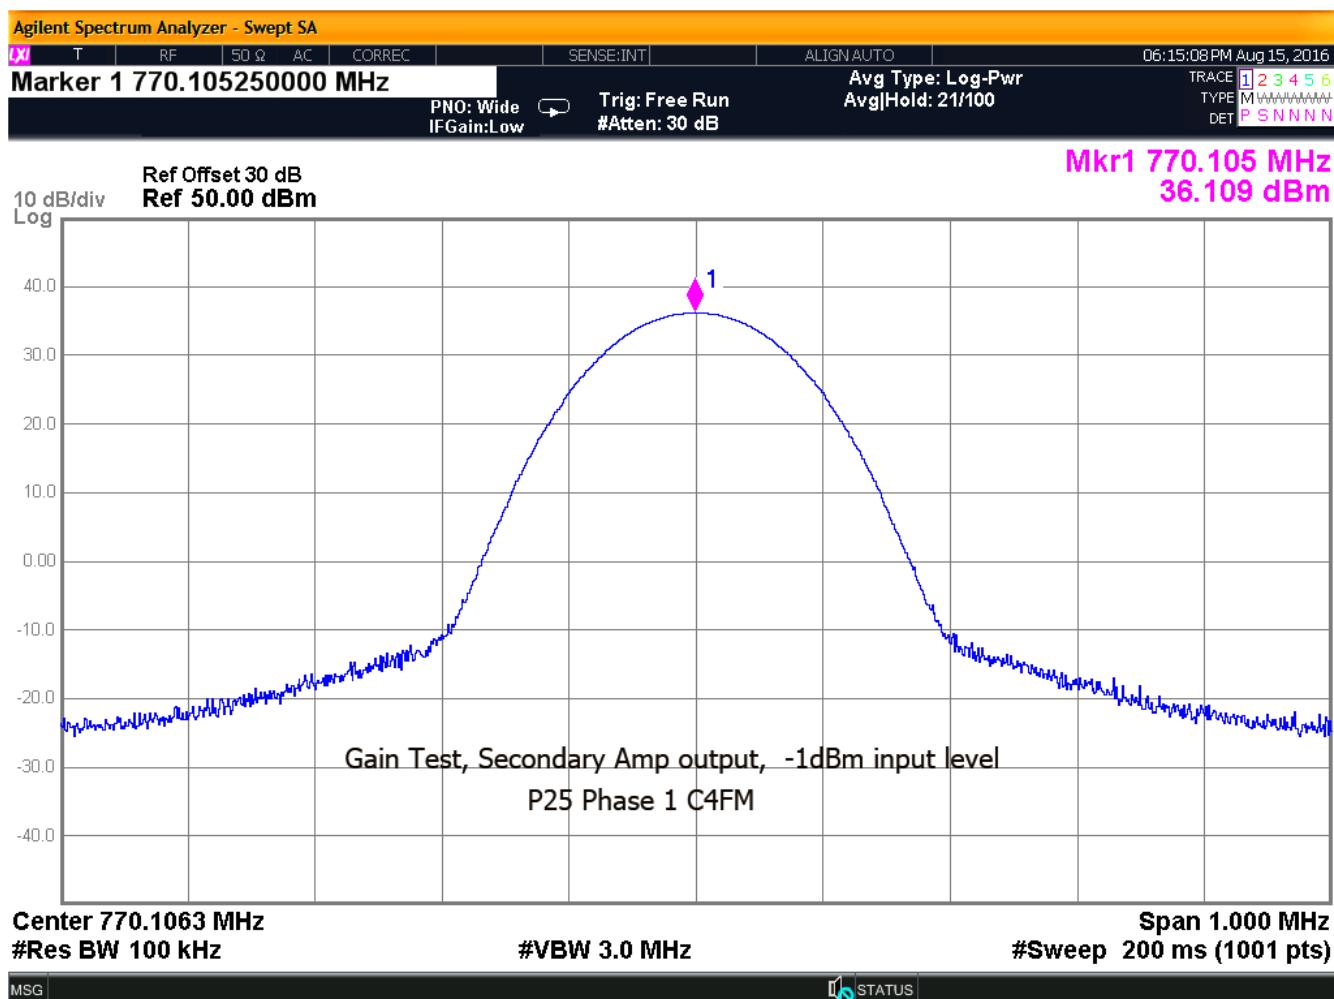


Figure 64 Power/Gain- P25 Ph1 C4FM Output set above threshold-Secondary Amp

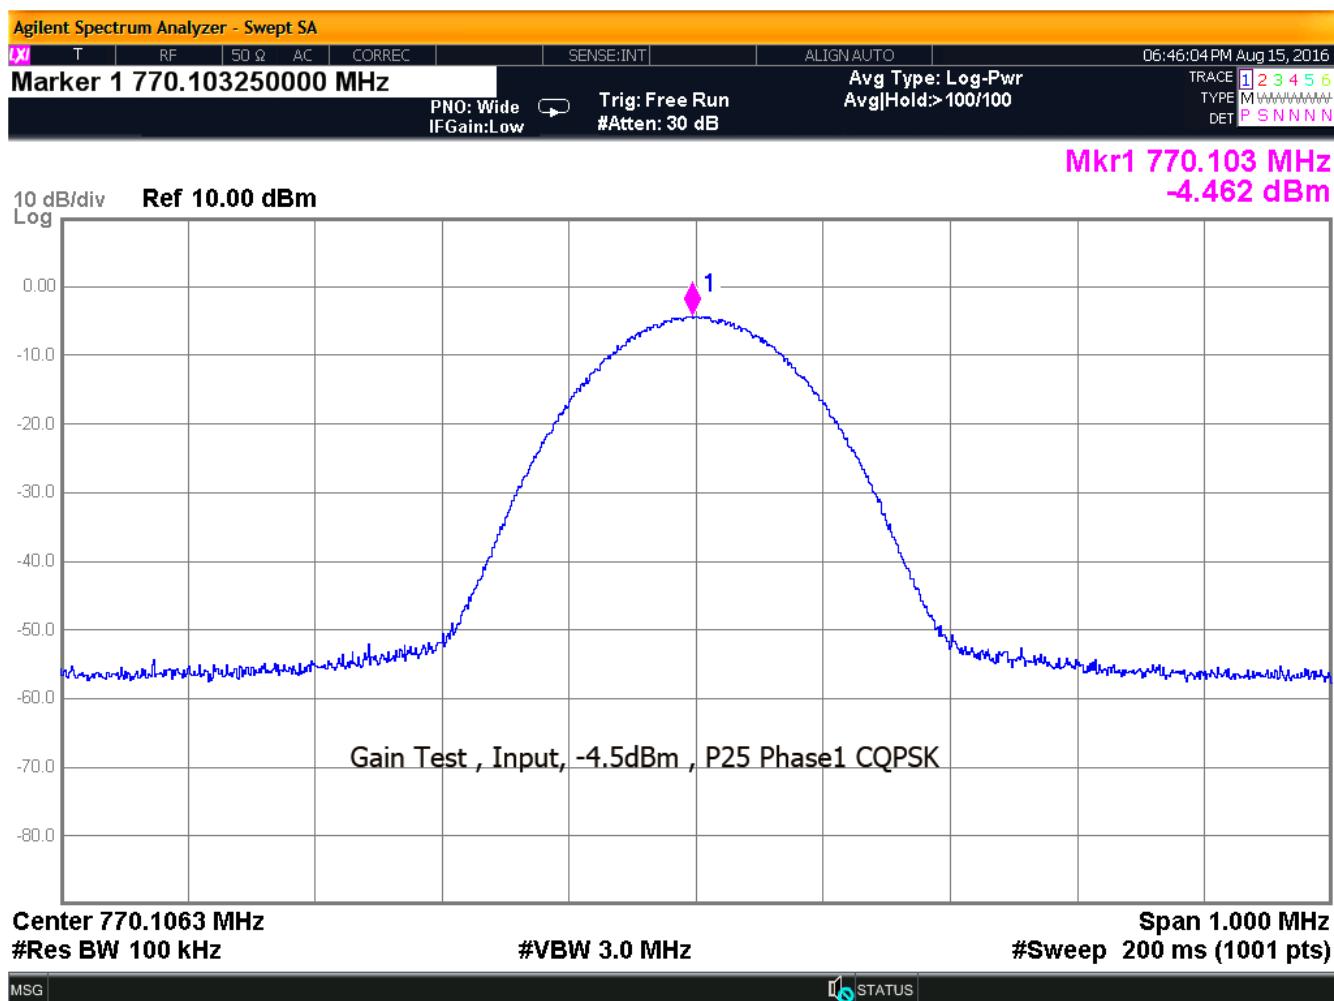


Figure 65 Power/Gain-P25 Ph1 CQPSK input set below threshold

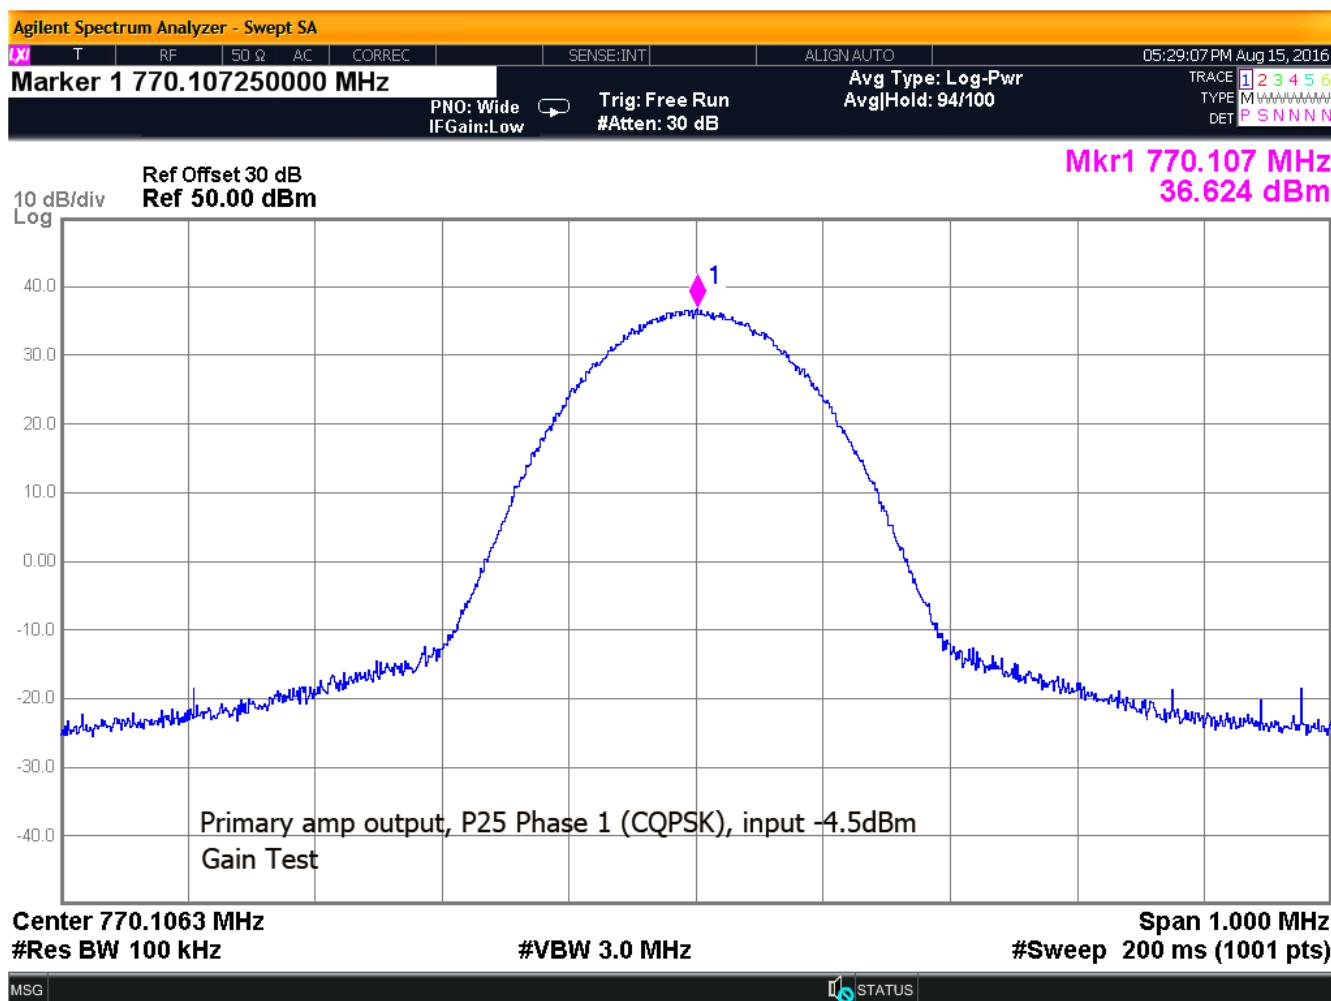


Figure 66 Power/Gain- P25 Ph1 CQPSK Output set below threshold-Primary Amp

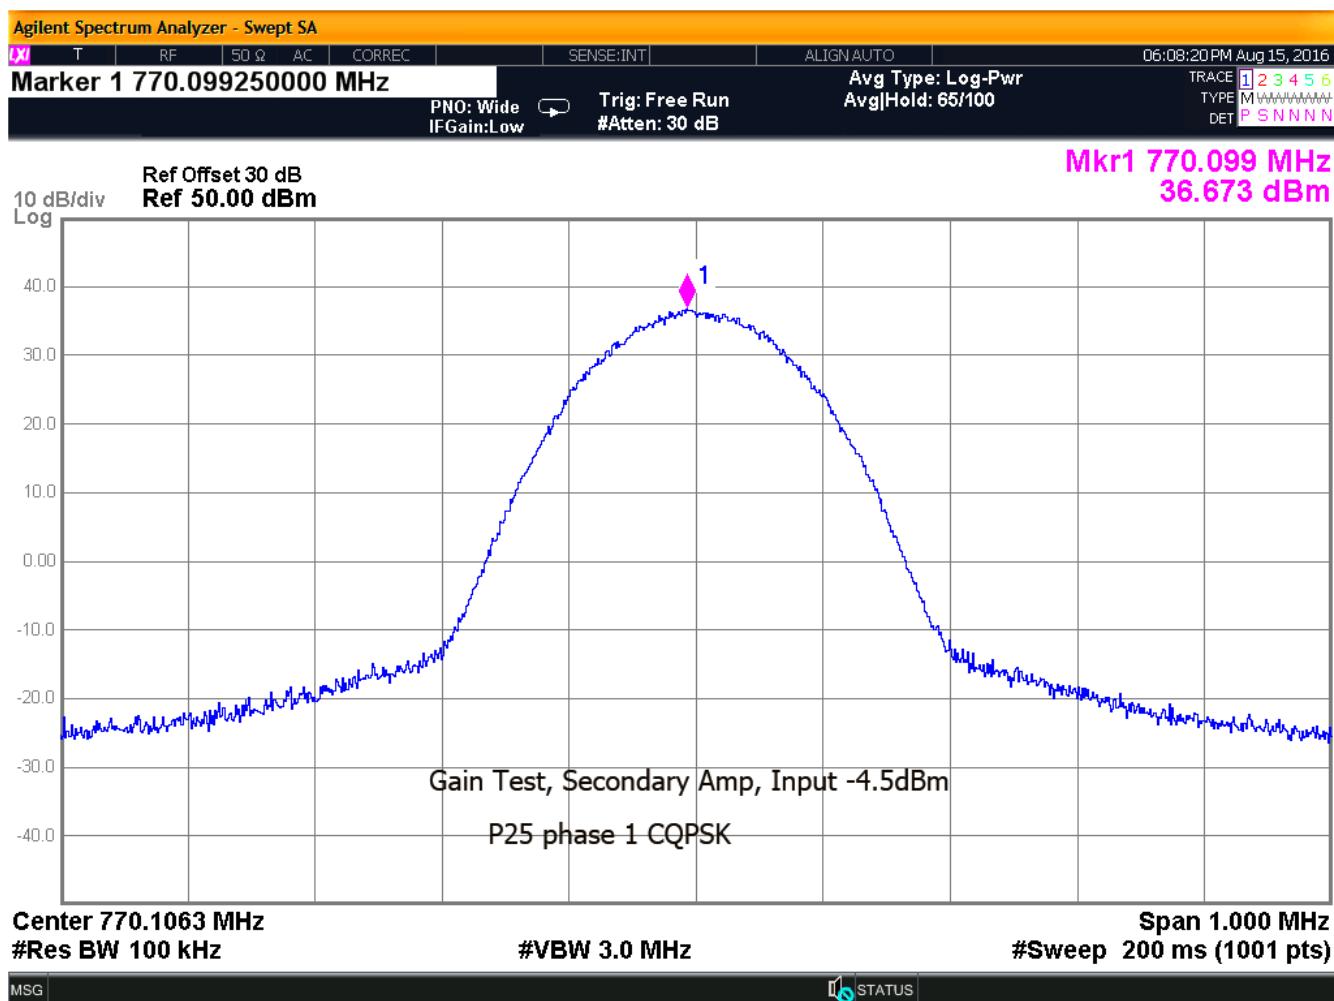


Figure 67 Power/Gain- P25 Ph1 CQPSK Output set below threshold-Secondary Amp

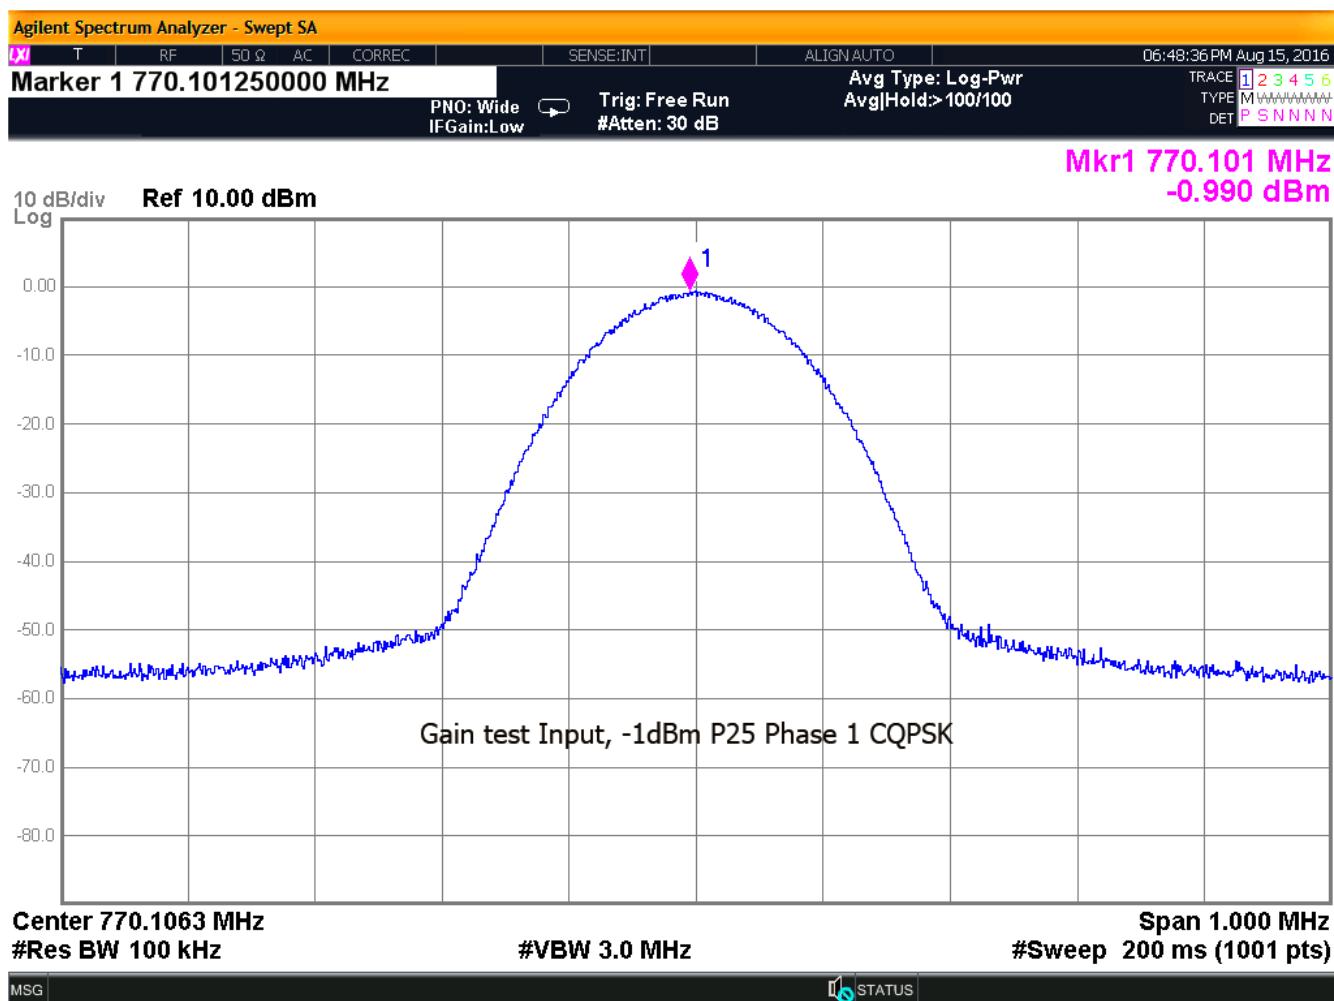


Figure 68 Power/Gain-P25 Ph1 CQPSK input set above threshold

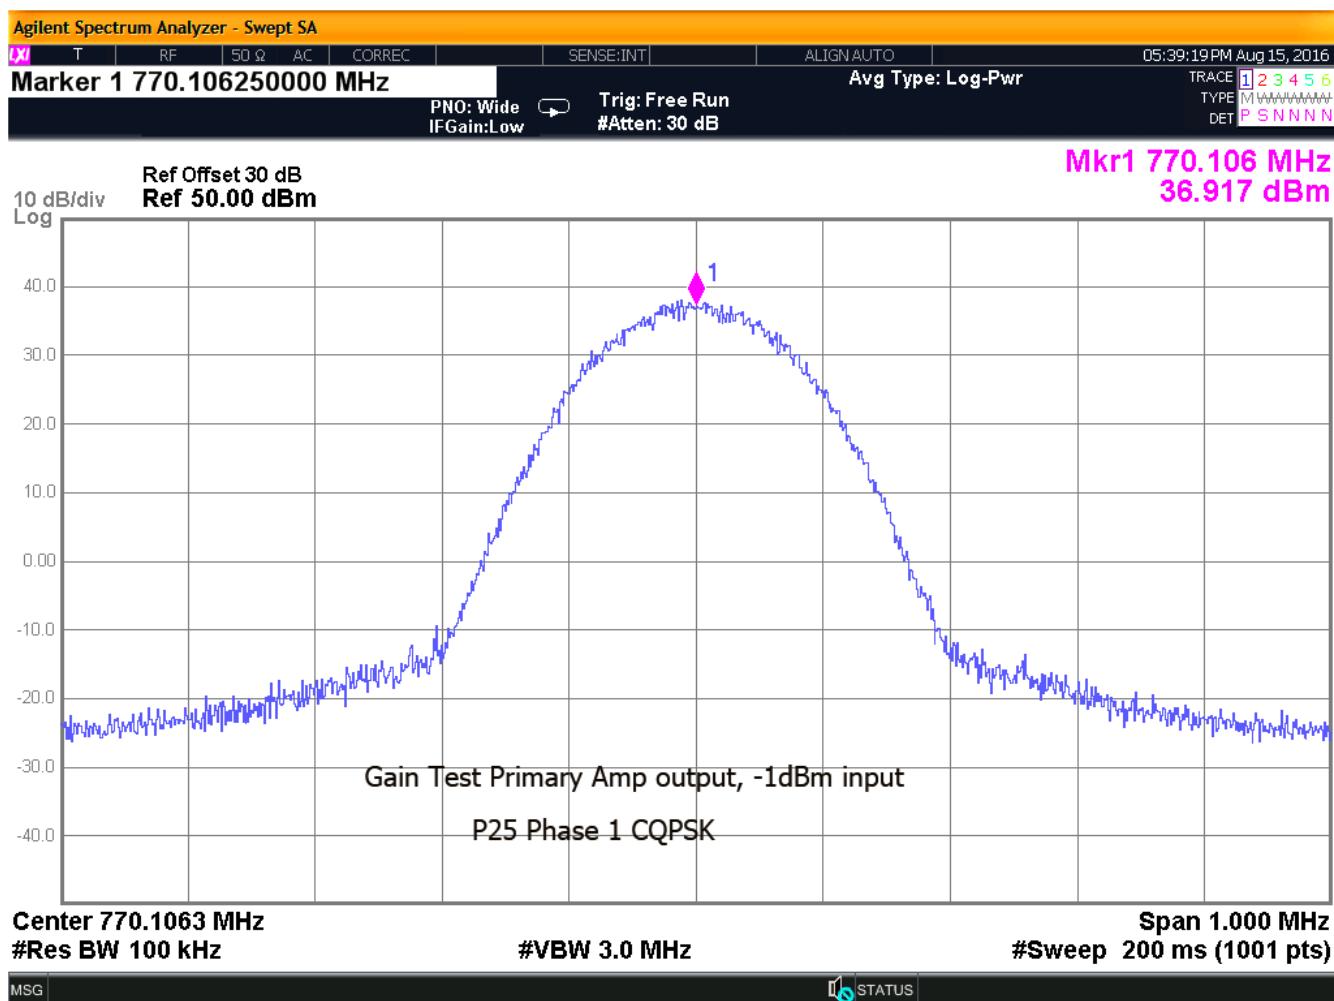


Figure 69 Power/Gain- P25 Ph1 CQPSK Output set above threshold-Primary Amp

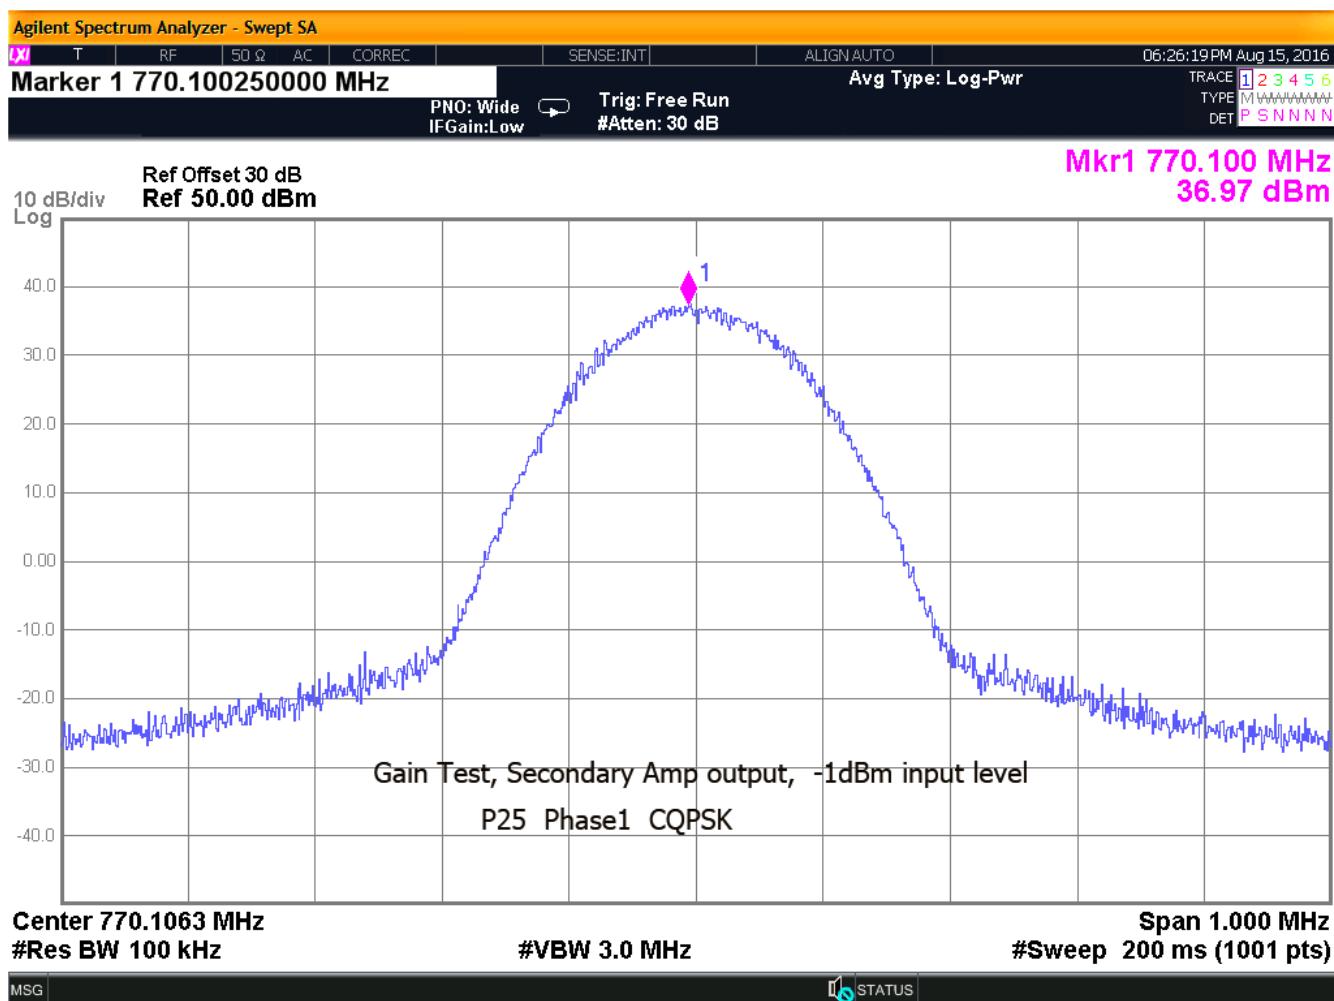


Figure 70 Power/Gain- P25 Ph1 CQPSK Output set above threshold-Secondary Amp

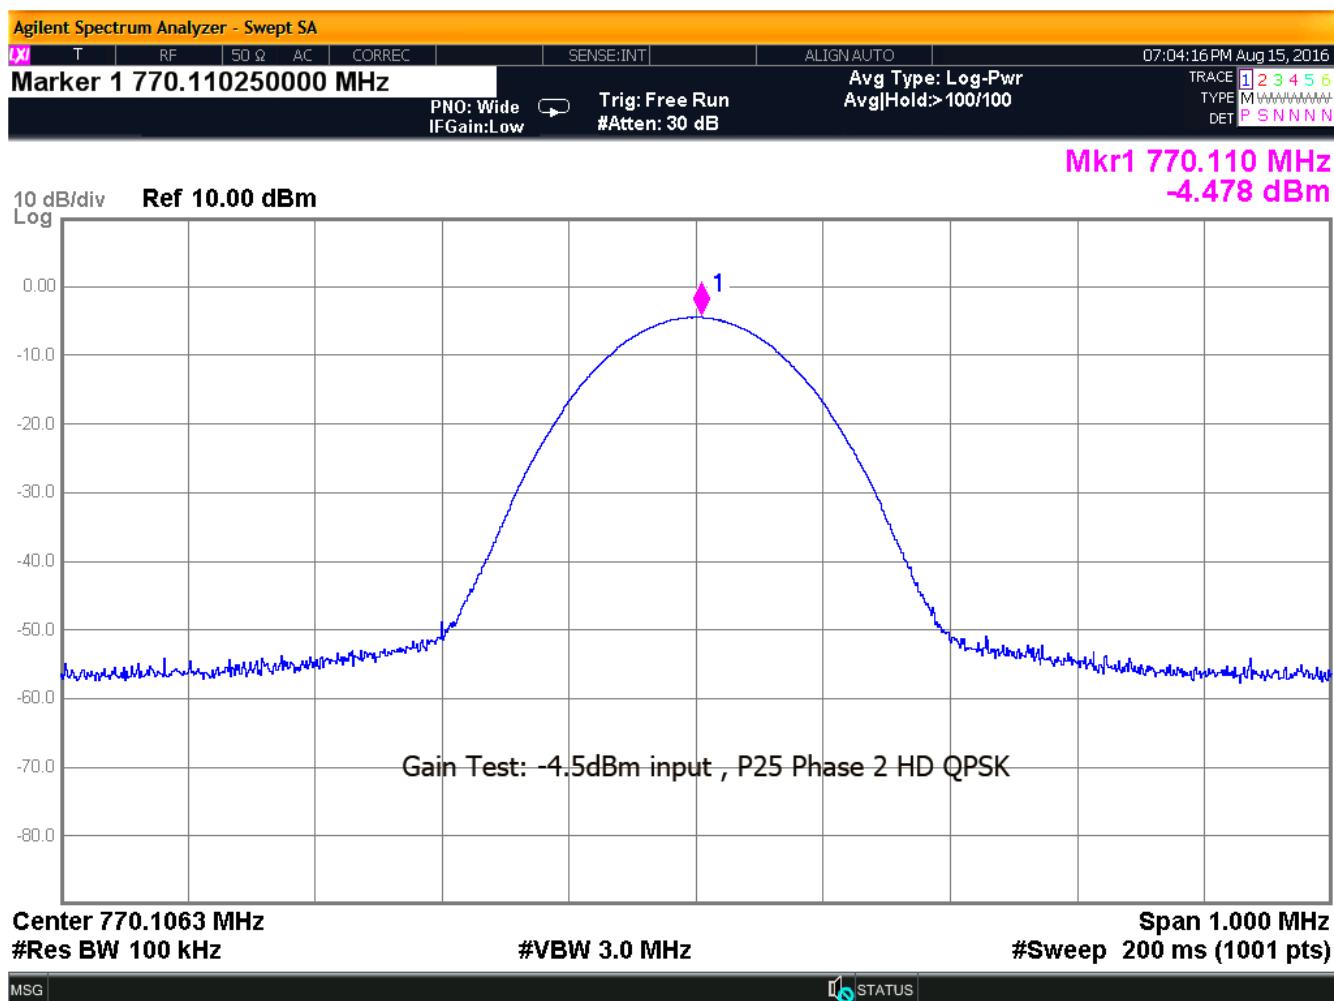


Figure 71 Power/Gain-P25 Ph2 HDQPSK input set below threshold

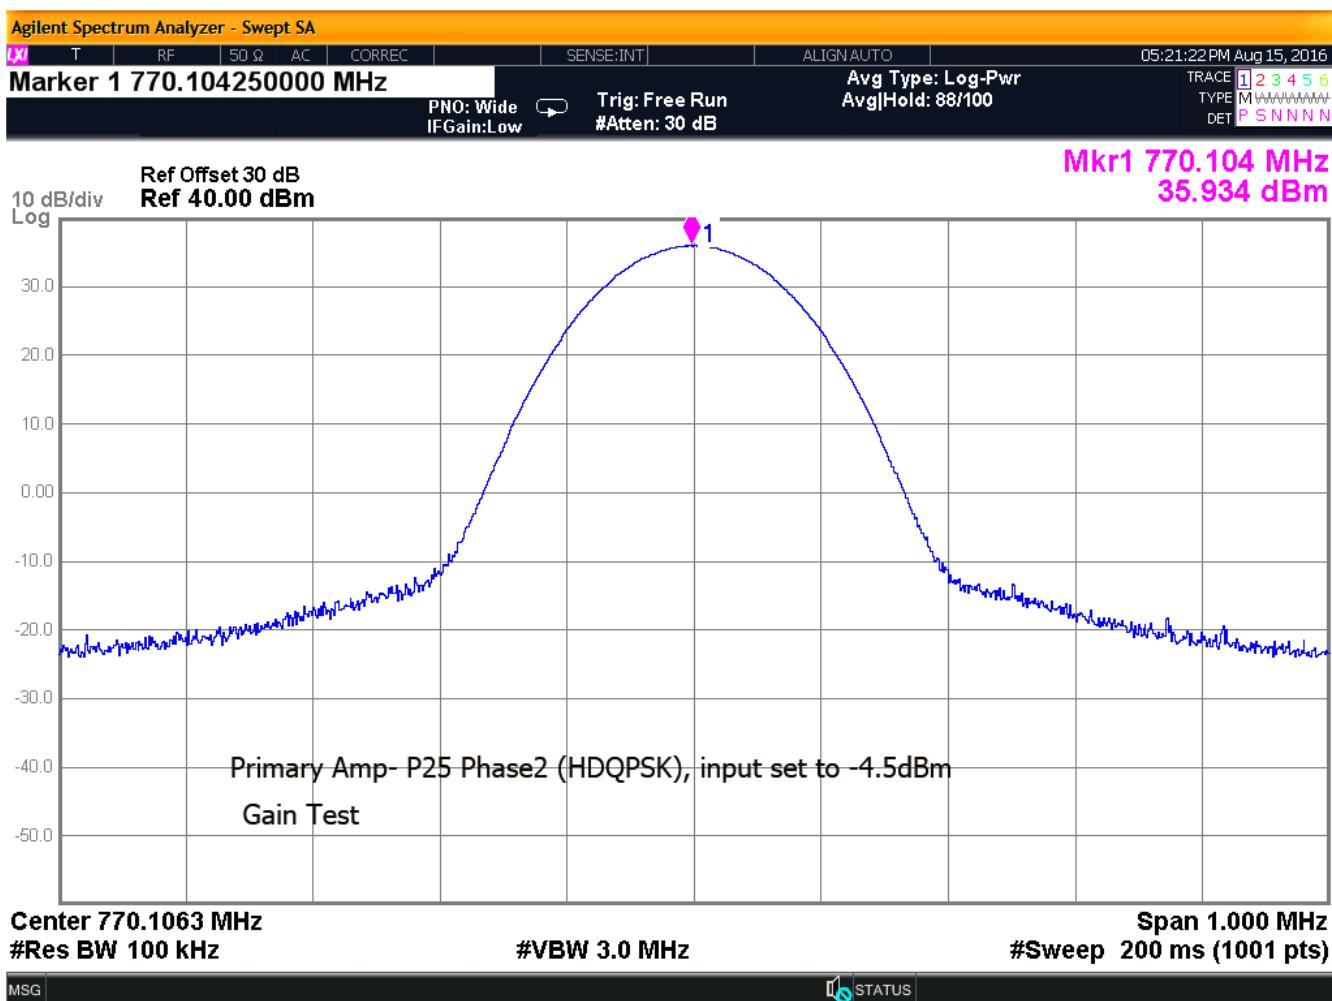


Figure 72 Power/Gain- P25 Ph2 HDQPSK Output set below threshold-Primary Amp

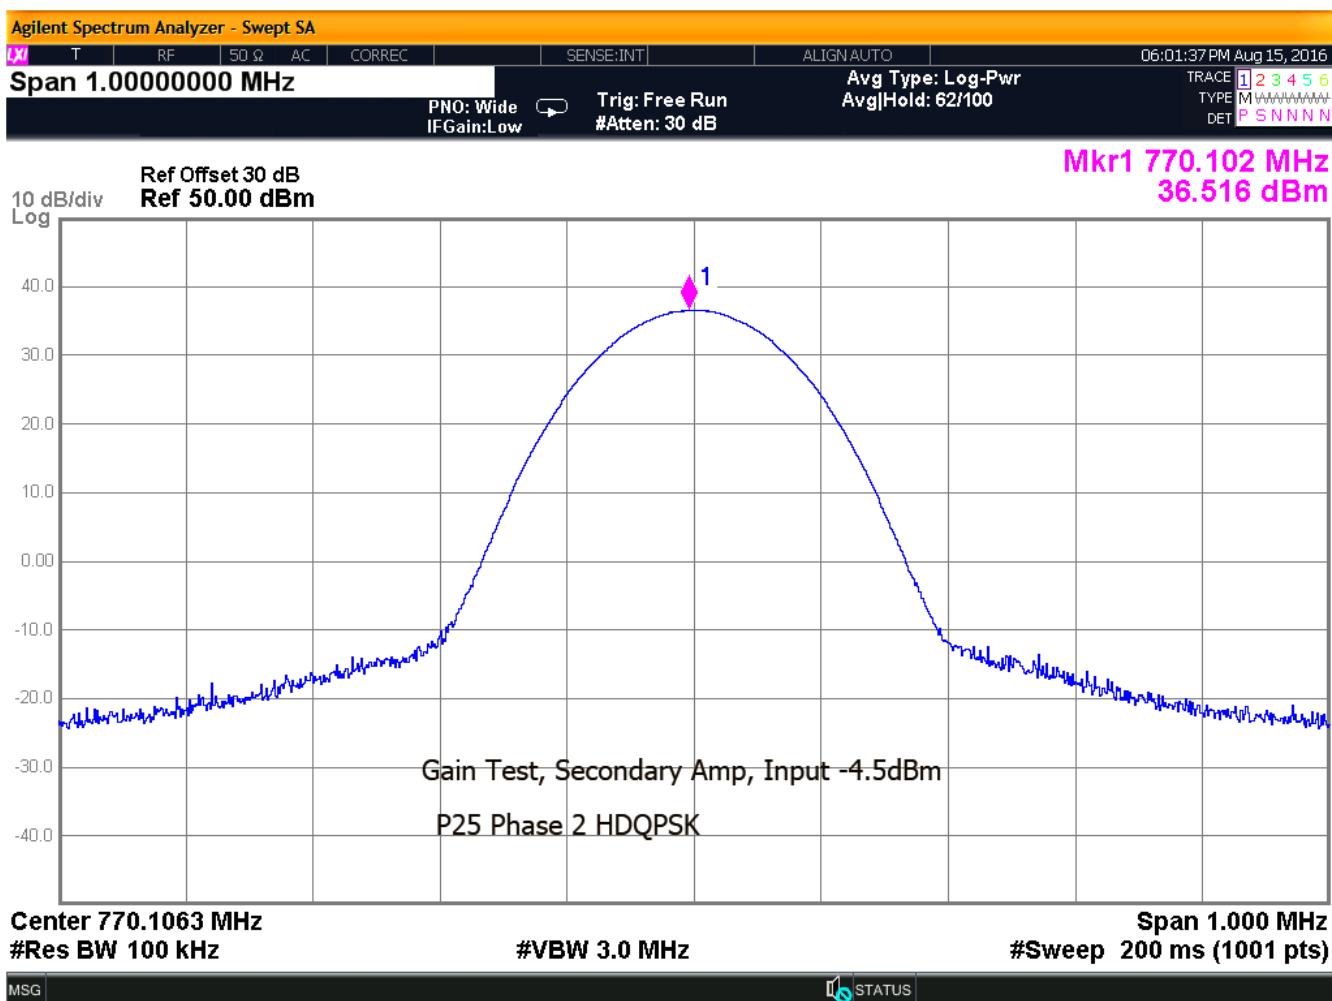


Figure 73 Power/Gain- P25 Ph2 HDQPSK Output set below threshold-Secondary Amp

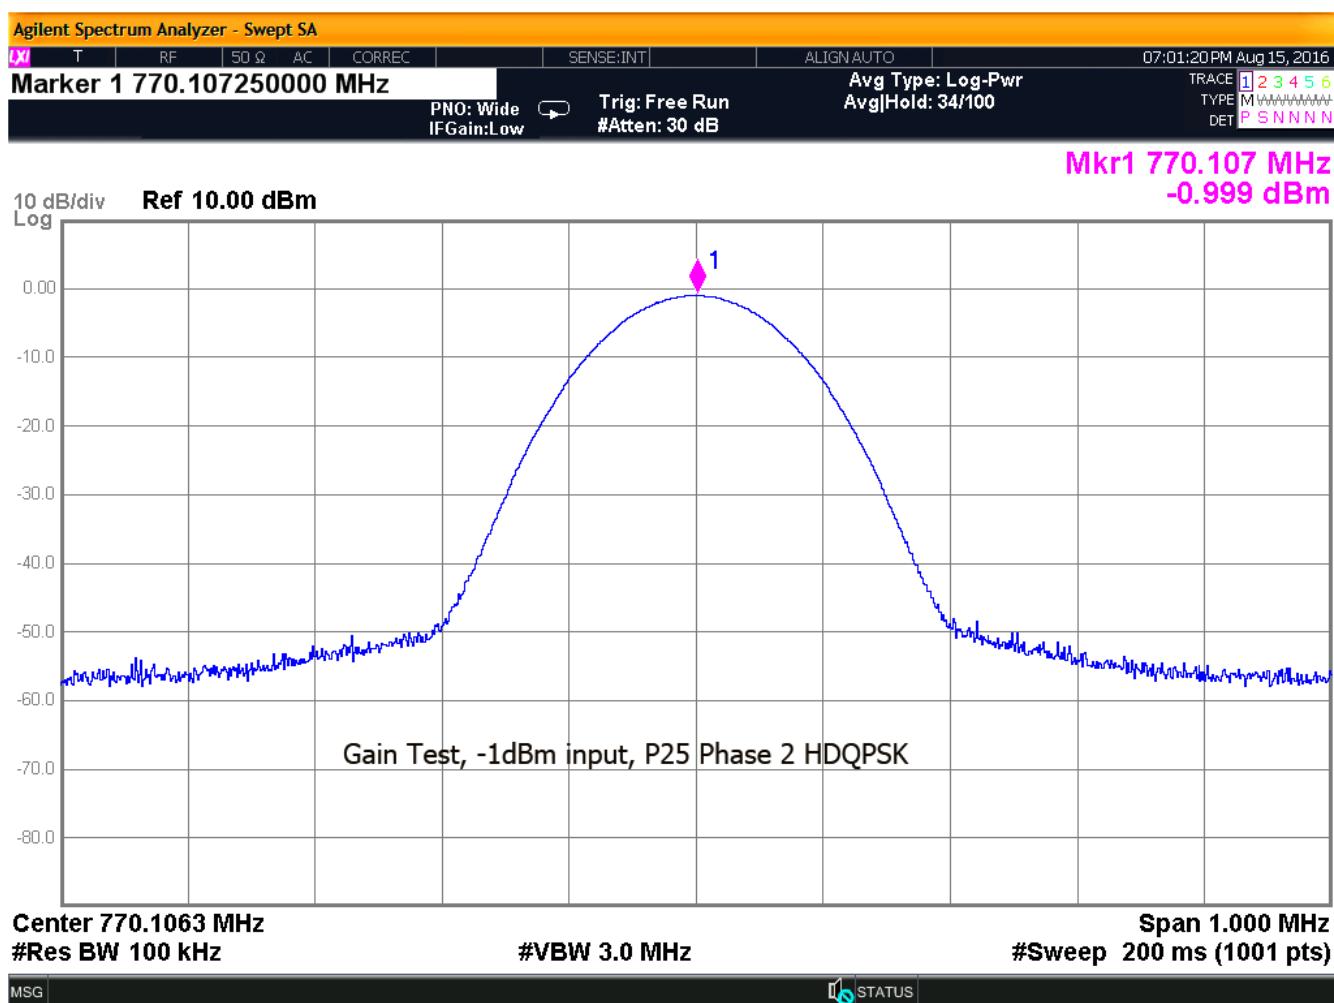


Figure 74 Power/Gain-P25 Ph2 HDQPSK input set above threshold

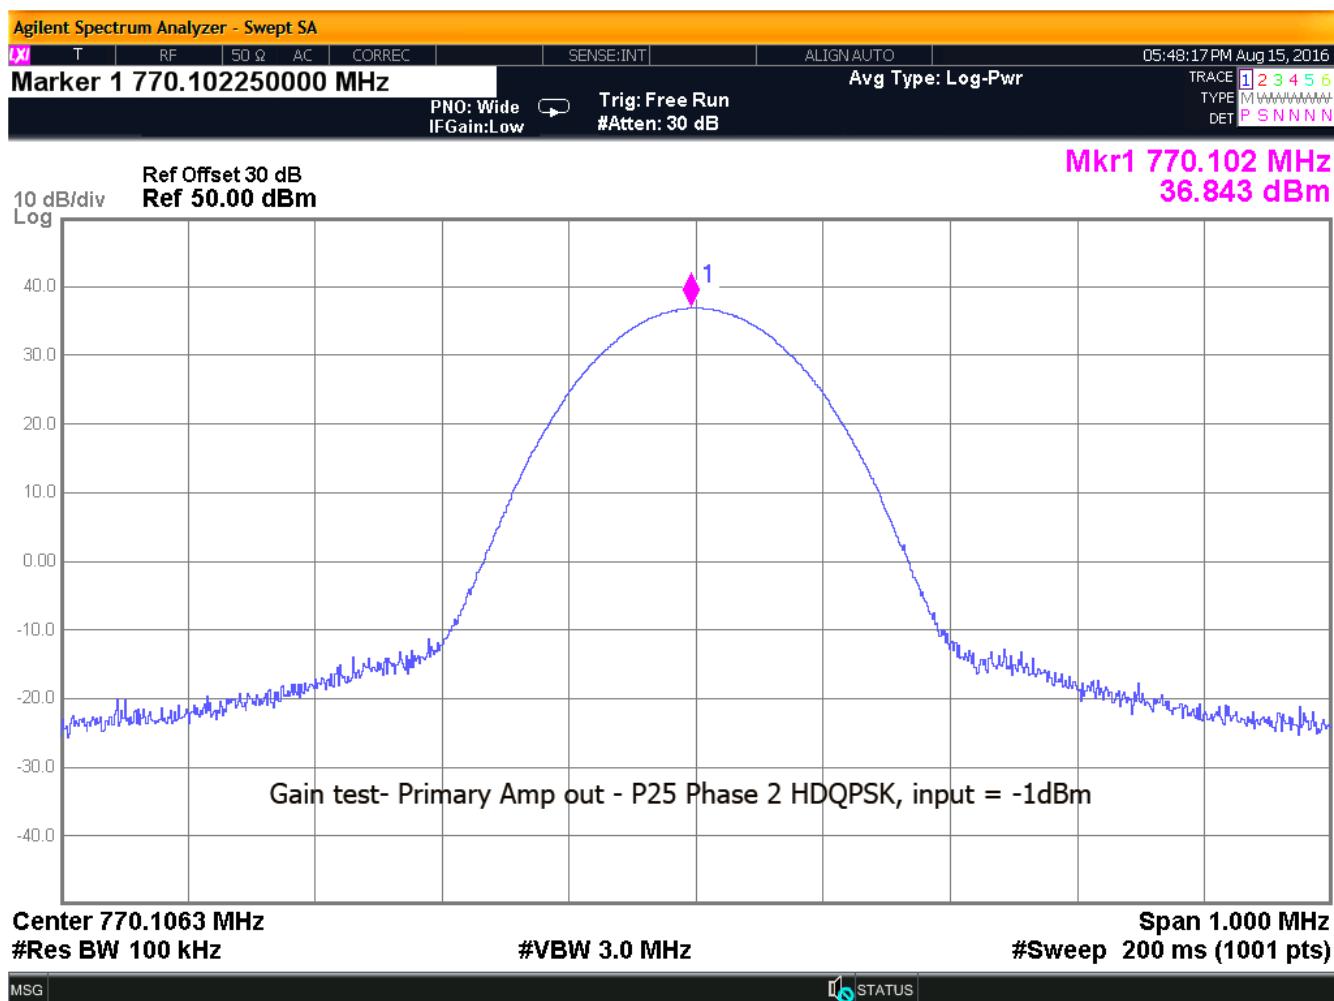


Figure 75 Power/Gain- P25 Ph2 HDQPSK Output set above threshold-Primary Amp

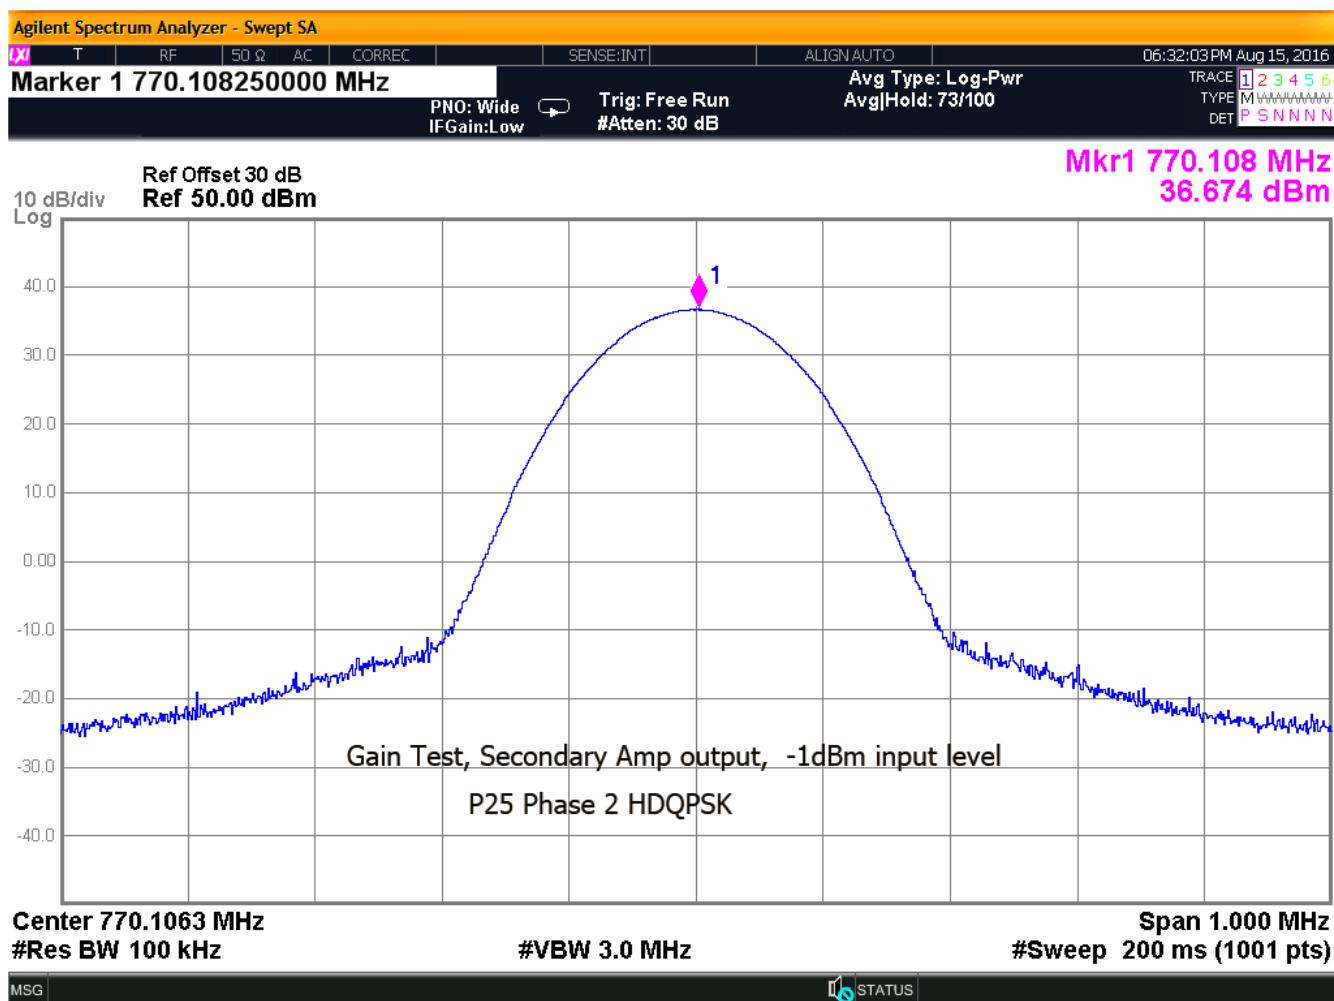


Figure 76 Power/Gain- P25 Ph2 HDQPSK Output set above threshold-Secondary Amp

4.5 EUT noise figure measurement (935210 DO5 section 4.6)

Section 4.6: 90.219(e)(2) limits the noise figure of a signal booster to ≤ 9 dB in either direction. The following guidance is offered with regards to measuring the noise figure to demonstrate compliance to this limitation.

There are several widely recognized methods for performing noise figure measurements. Some require the use of specialized equipment such as a noise figure analyzer and/or an excess noise ratio (ENR) calibrated noise source, while others involve the use of conventional measurement instrumentation such as a spectrum analyzer. The methodology that requires the use of a noise figure analyzer is generally accepted as producing the most accurate results, and thus is considered to be the primary method within this document, while other methods are considered to be acceptable alternatives. Consult the relevant instrumentation application notes for detailed guidance regarding the selection and application of an appropriate methodology for performing noise figure measurements. It should also be noted that noise figure measurements will require that any AGC circuitry be disabled over the duration of the measurement.

Since a Noise figure analyzer was not available, an alternate method utilizing the definition of Noise Figure was utilized.

$$F_n = P_n / (kT_oBG)$$

Noise Factor Equation

Where:

F_n =Noise Factor

P_n =Power of the channel noise

k =Boltzmann's constant 1.38E-23 J/K

T_0 =290k

B = the channel bandwidth

G = the gain of the amplifier

$$NF = 10 \log F_n$$

Noise Figure Equation

Where:

F_n = the Noise Factor

NF = the Noise Figure

To perform the measurement, each window input was terminated with 50 ohms. The window and amplifier were enabled and the spectrum analyzer was tuned to the center frequency of window.

The analyzer was configured to make a channel power measurement with an integration bandwidth of 12.5kHz since this is the typical channel bandwidth and we are interested in the amount of noise introduced to the channel by the amplifier.

4.5.1 Results

Each window met the requirements of ≤ 9 dB noise figure. See Table 8 for tabulated results.

Table 8: Noise Figure

Amplifier	Gain (dB)	Bandwidth (kHz)	Noise Power {P _n } (Watts)	Noise Figure {F _n } (dB)
769-775MHz Primary	40.060	12.5	2.38E-12	4.7
769-775MHz Secondary	40.900	12.5	3.74E-12	6.1

4.6 Out-of-band/block (including intermodulation)& spurious emissions (935210 DO5 section 4.7)

Section 4.7 Specifies the limits of §90.210 apply on unwanted (out-of-band/block and spurious) emissions.

There are two requirements in this section: Intermodulation products and Spurious emissions.

KDB 935210 D05 Section 4.7.2 EUT out-of-band/block emissions conducted measurement
Intermodulation products shall be measured while applying two CW tones spaced in frequency ± 12.5 kHz relative to the center frequency (f_0) as determined from 4.4.

a) Connect a signal generator to the input of the EUT.

NOTE—If the signal generator is not capable of producing two independent modulated carriers simultaneously, then two discrete signal generators can be connected with an appropriate combining network to support the two-tone test.

b) Configure the two signal generators to produce CW tones on frequencies spaced at ± 12.5 kHz relative to f_0 with amplitude levels set just below the AGC threshold (see 4.2).

c) Connect a spectrum analyzer to the EUT output.

d) Set the span to 100 kHz.

e) Set the resolution bandwidth to 300 Hz with a video bandwidth $\geq 3 \times$

RBW. f) Set the detector to power average (rms).

g) Place a marker on highest intermodulation product

amplitude. h) Capture the plot for inclusion in the test report.

4.6.1 Results

No intermodulation products exceed the limits. See Table 9 for tabular results. See Figure 77 through Figure 88 for the plots.

Table 9: Intermodulation products

Frequency Band (MHz)	Input level (AGC Threshold at -4 dBm)	Channel Spacing (KHz)	Maximum Intermodulation Level (dBm)	Limit (dBm)	Margin (db)
769-775	-4.5dBm	12.5	-21.97	-13	-8.97
769-775	-4.5dBm	25	-23.20	-13	-10.2
769-775	-1.0dBm	12.5	-17.89	-13	-4.89
769-775	-1.0dBm	25	-20.41	-13	-7.41

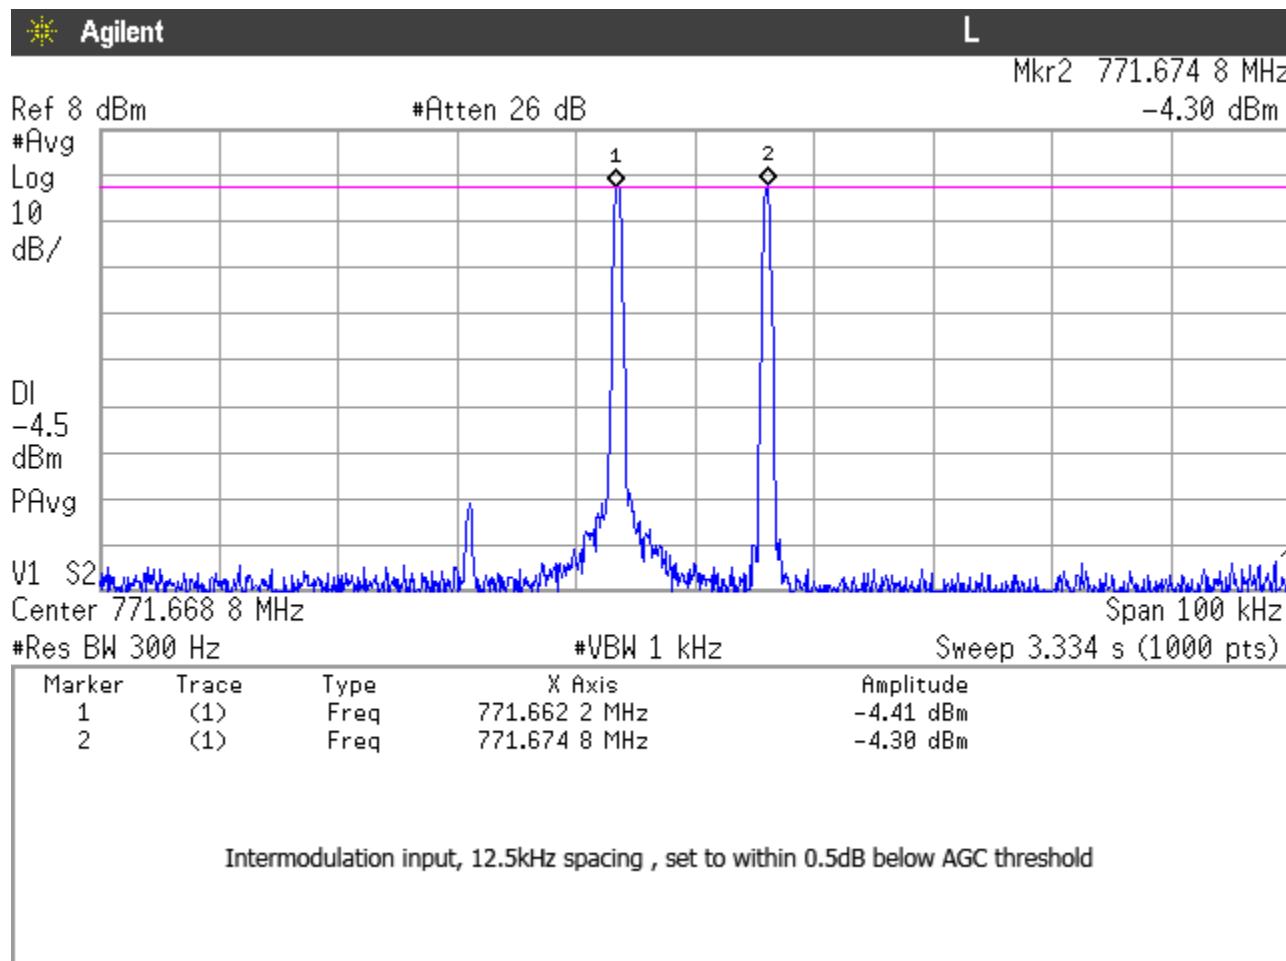


Figure 77: Intermod, 769-775MHz Band, 12.5kHz, Input below AGC

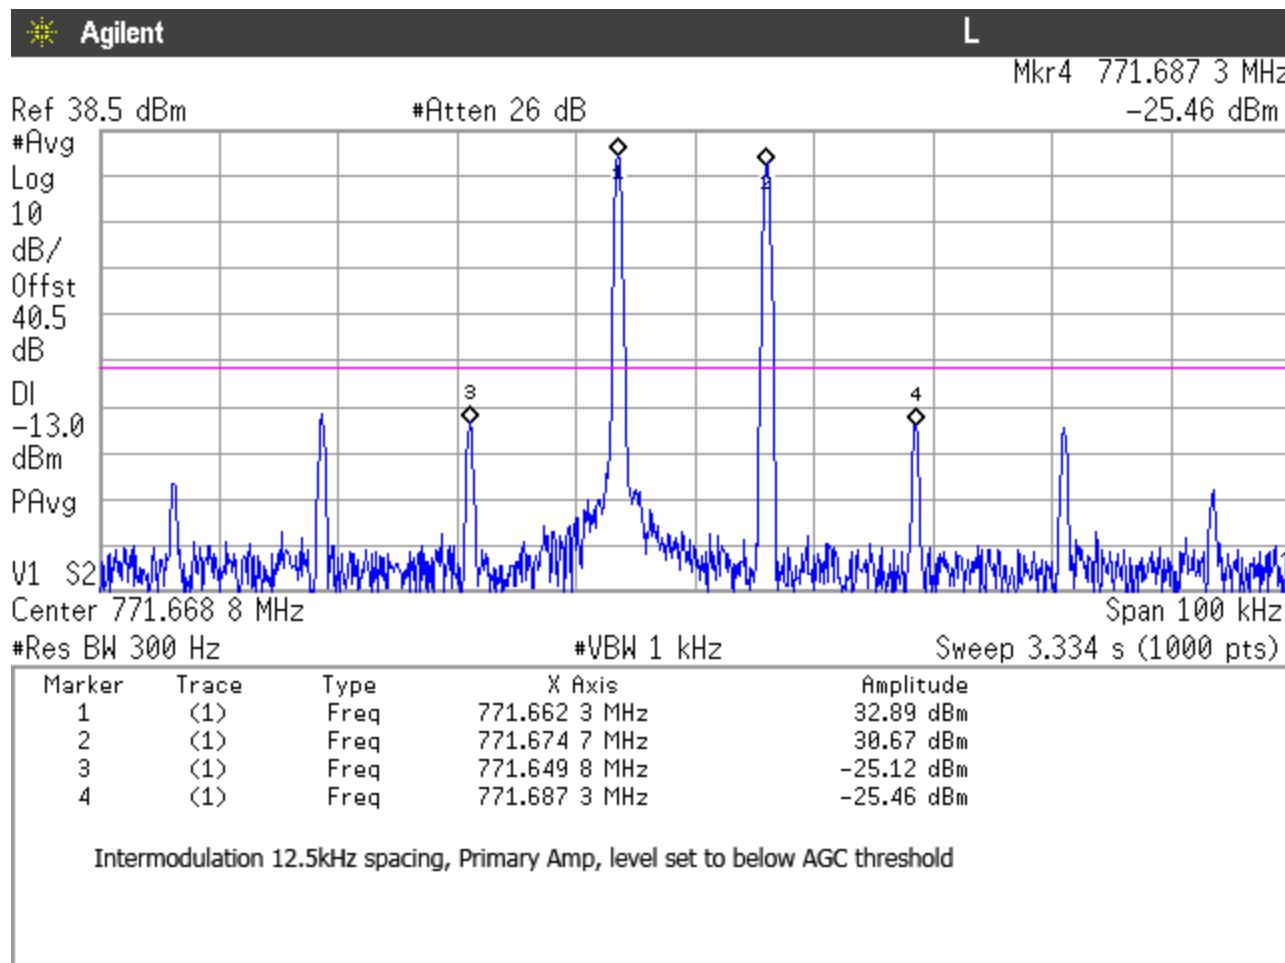


Figure 78: Intermod, 769-775MHz Band, 12.5kHz, Primary Amp, Input below AGC

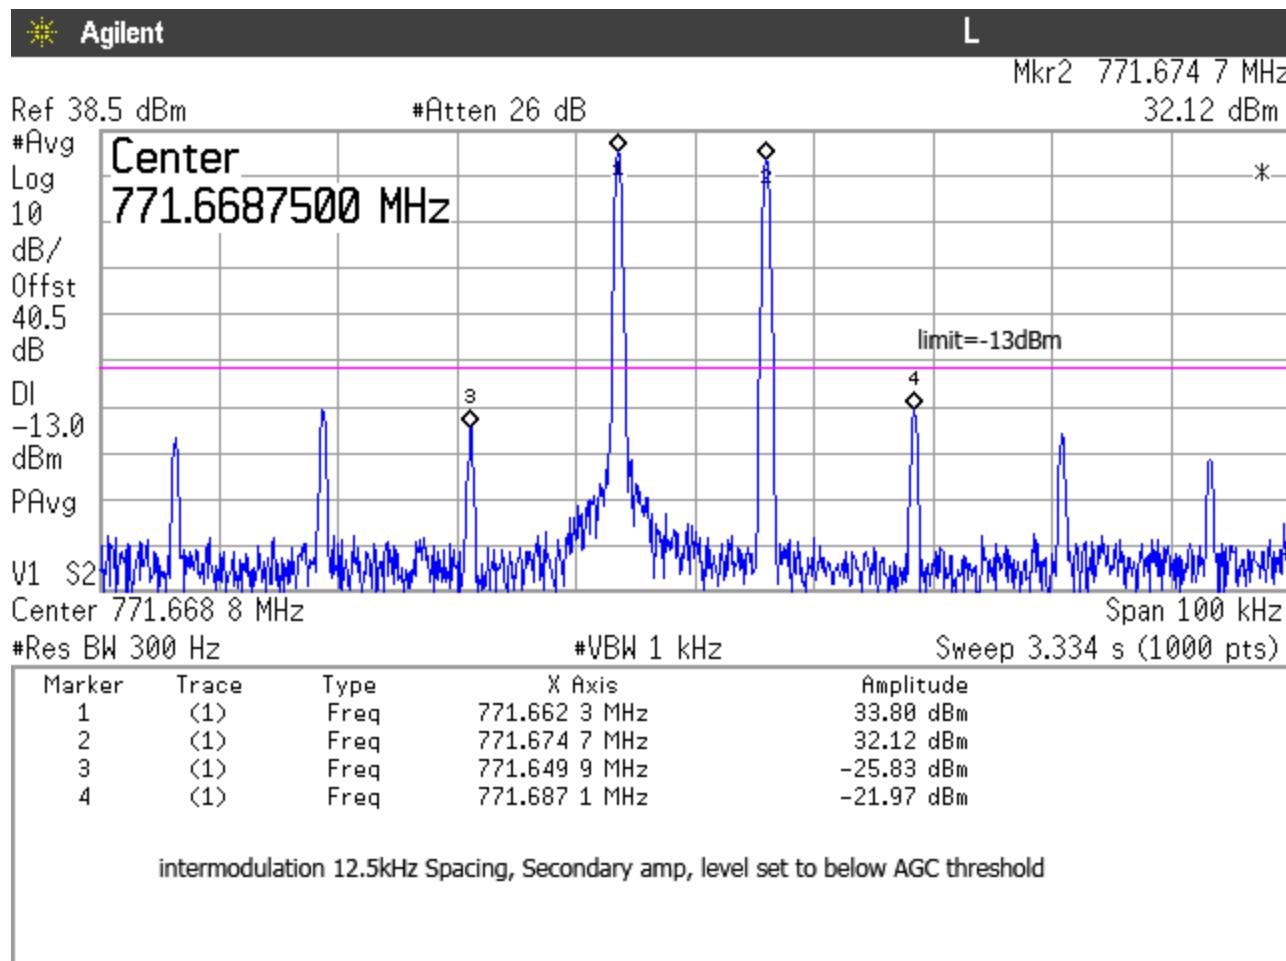


Figure 79: Intermod, 769-775MHz Band, 12.5kHz, Secondary Amp, Input below AGC

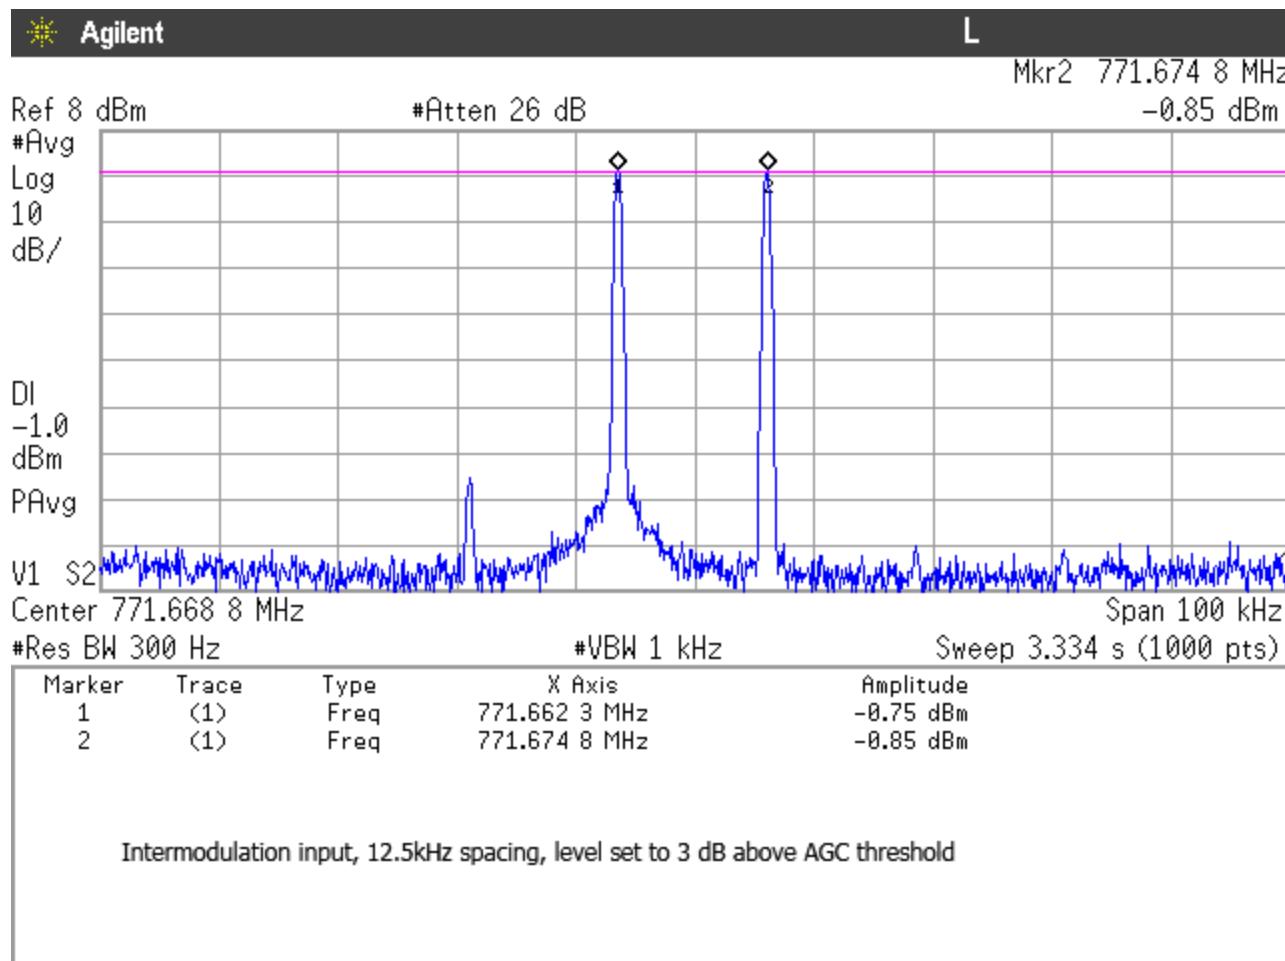


Figure 80: Intermod, 769-775MHz Band, 12.5kHz, Input above AGC

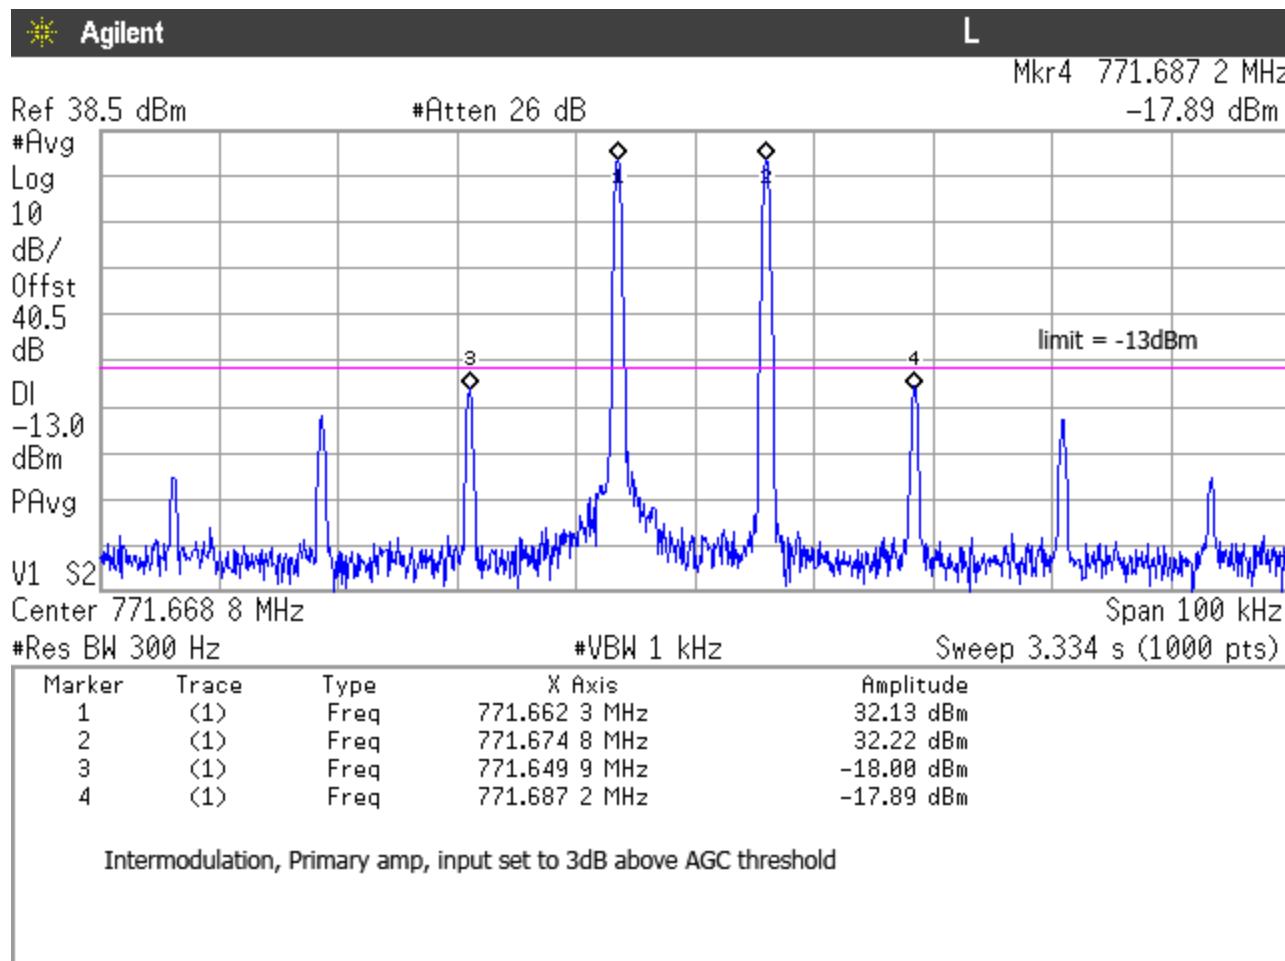


Figure 81: Intermod, 769-775MHz Band, 12.5kHz, Primary Amp, Input above AGC

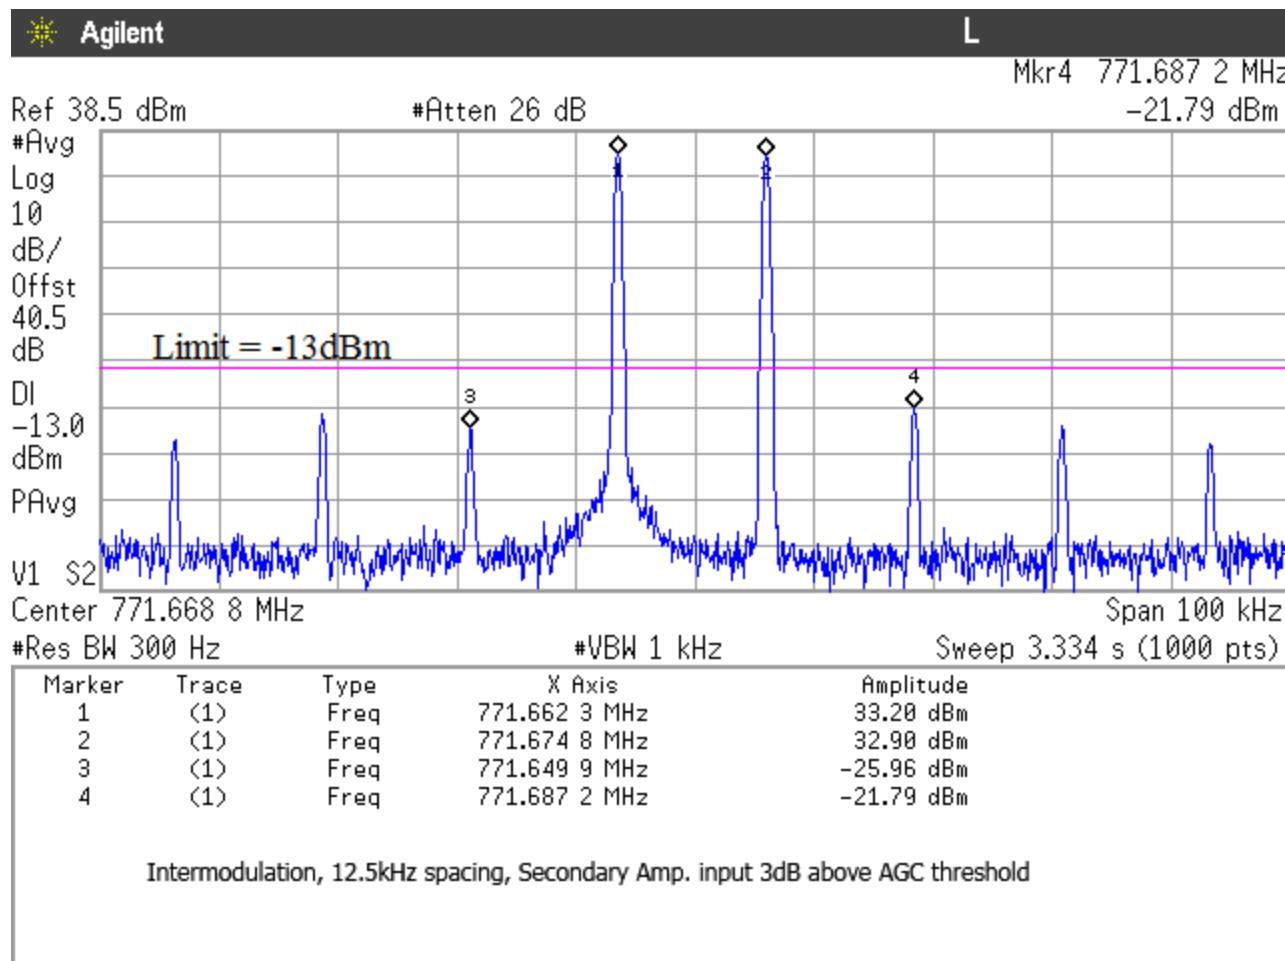


Figure 82: Intermod, 769-775MHz Band, 12.5kHz, Secondary Amp, Input above AGC

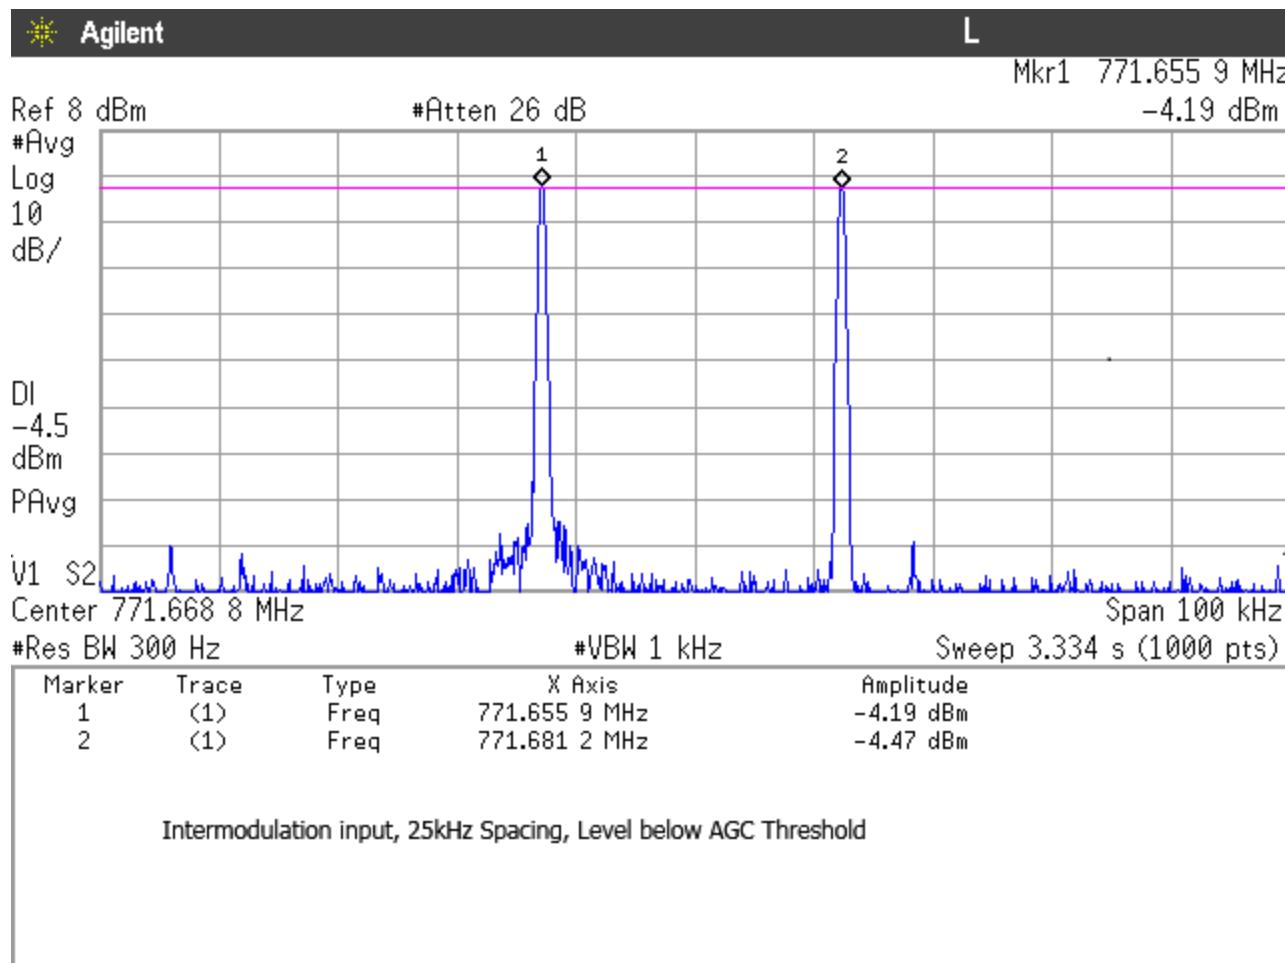


Figure 83: Intermod, 769-775MHz Band, 25kHz, Input below AGC

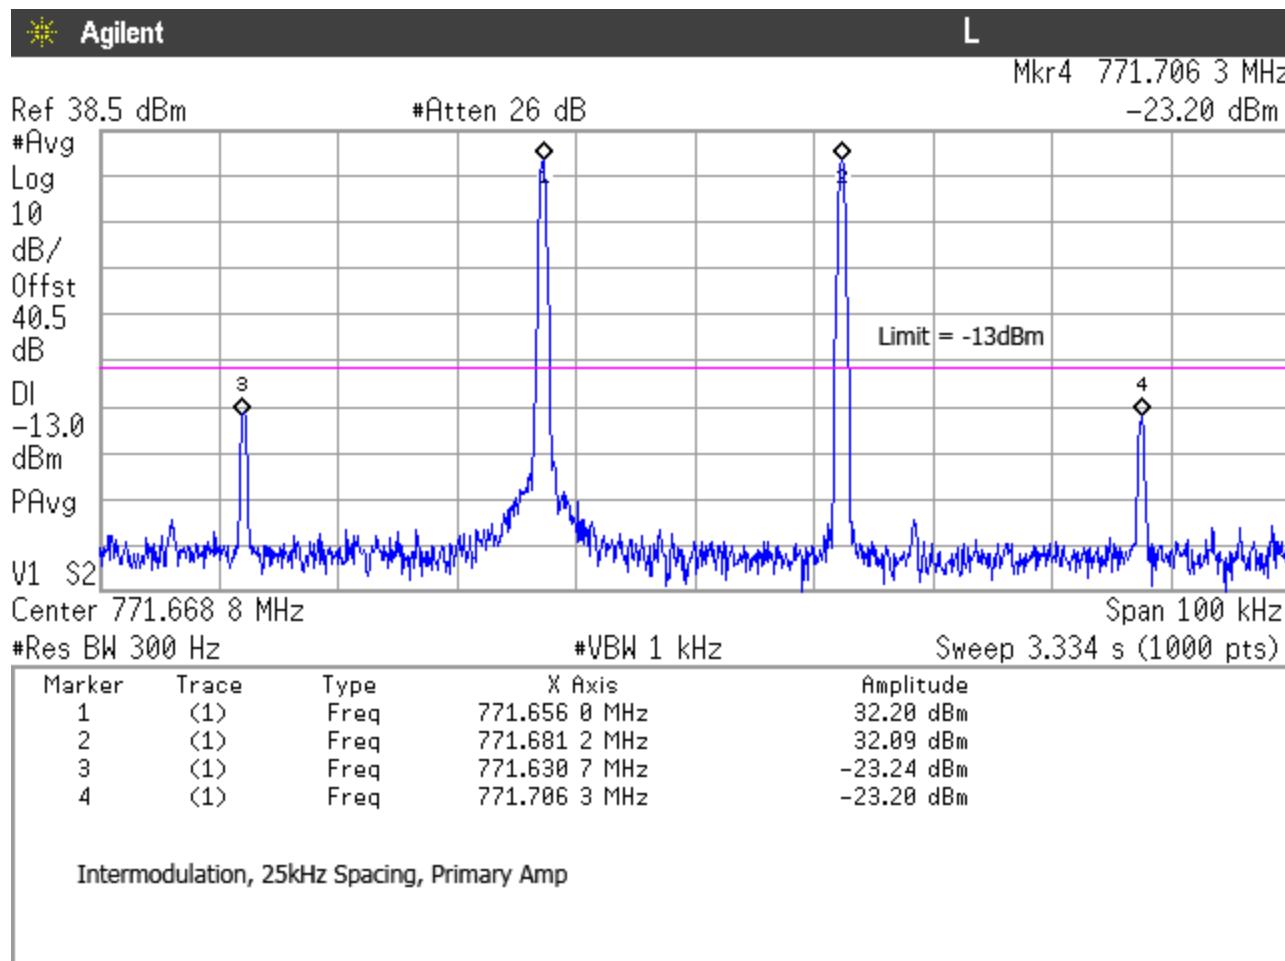


Figure 84: Intermod, 769-775MHz Band, 25kHz, Primary Amp, Input below AGC

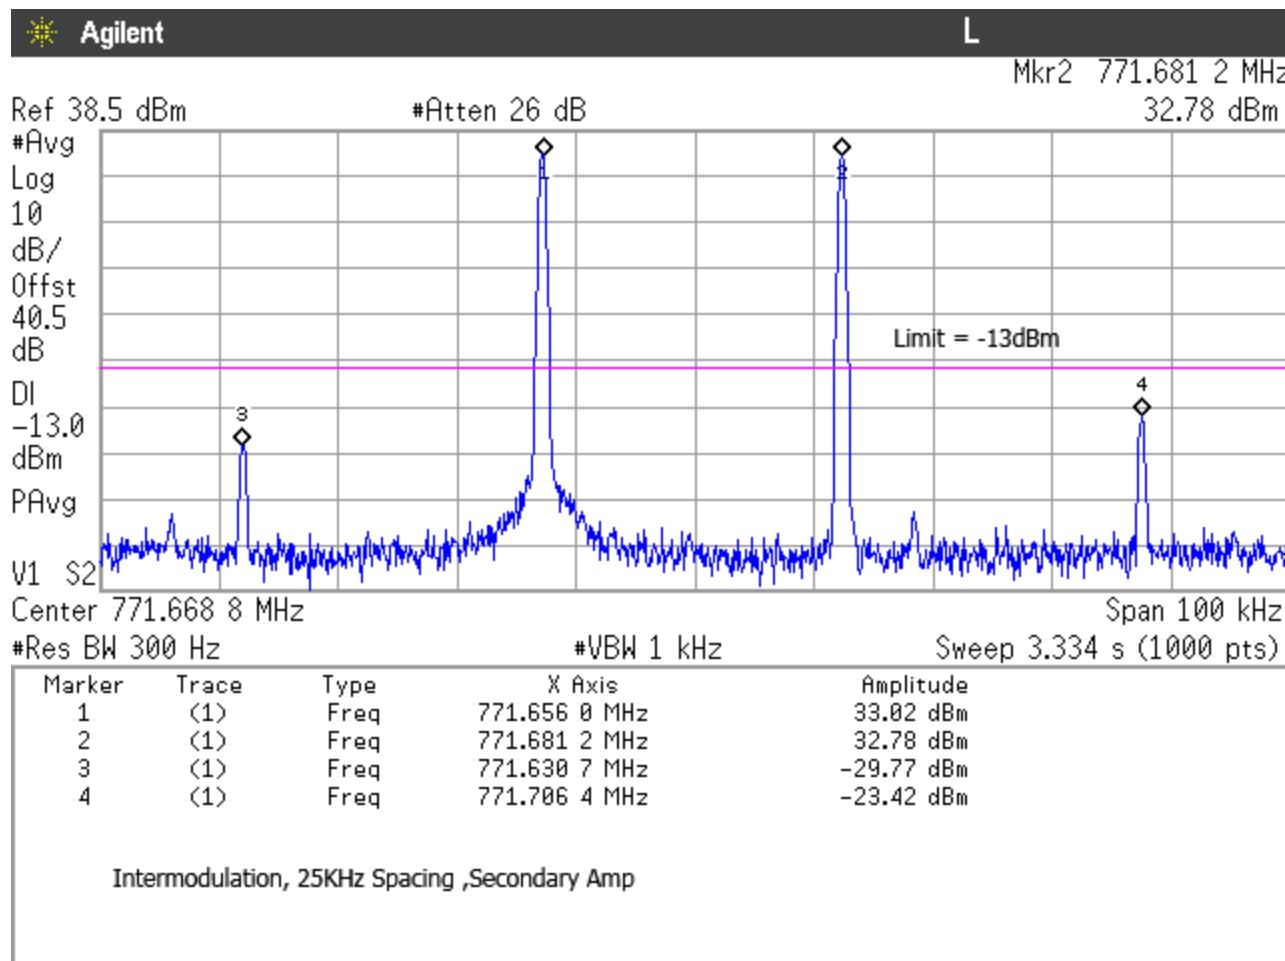


Figure 85: Intermod, 769-775MHz Band, 25kHz, Secondary Amp, Input below AGC

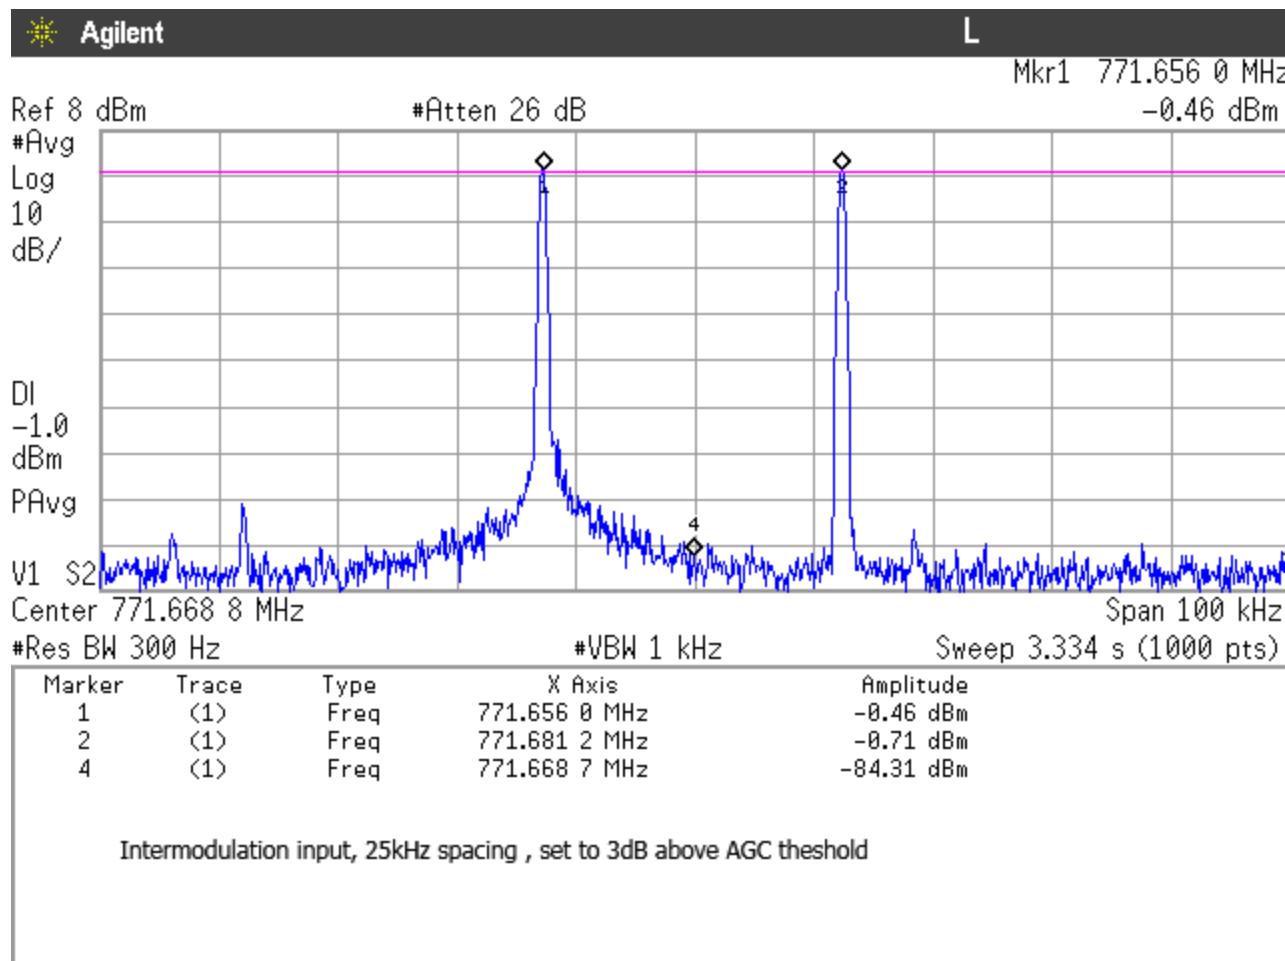


Figure 86: Intermod, 769-775MHz Band, 25kHz, Input above AGC

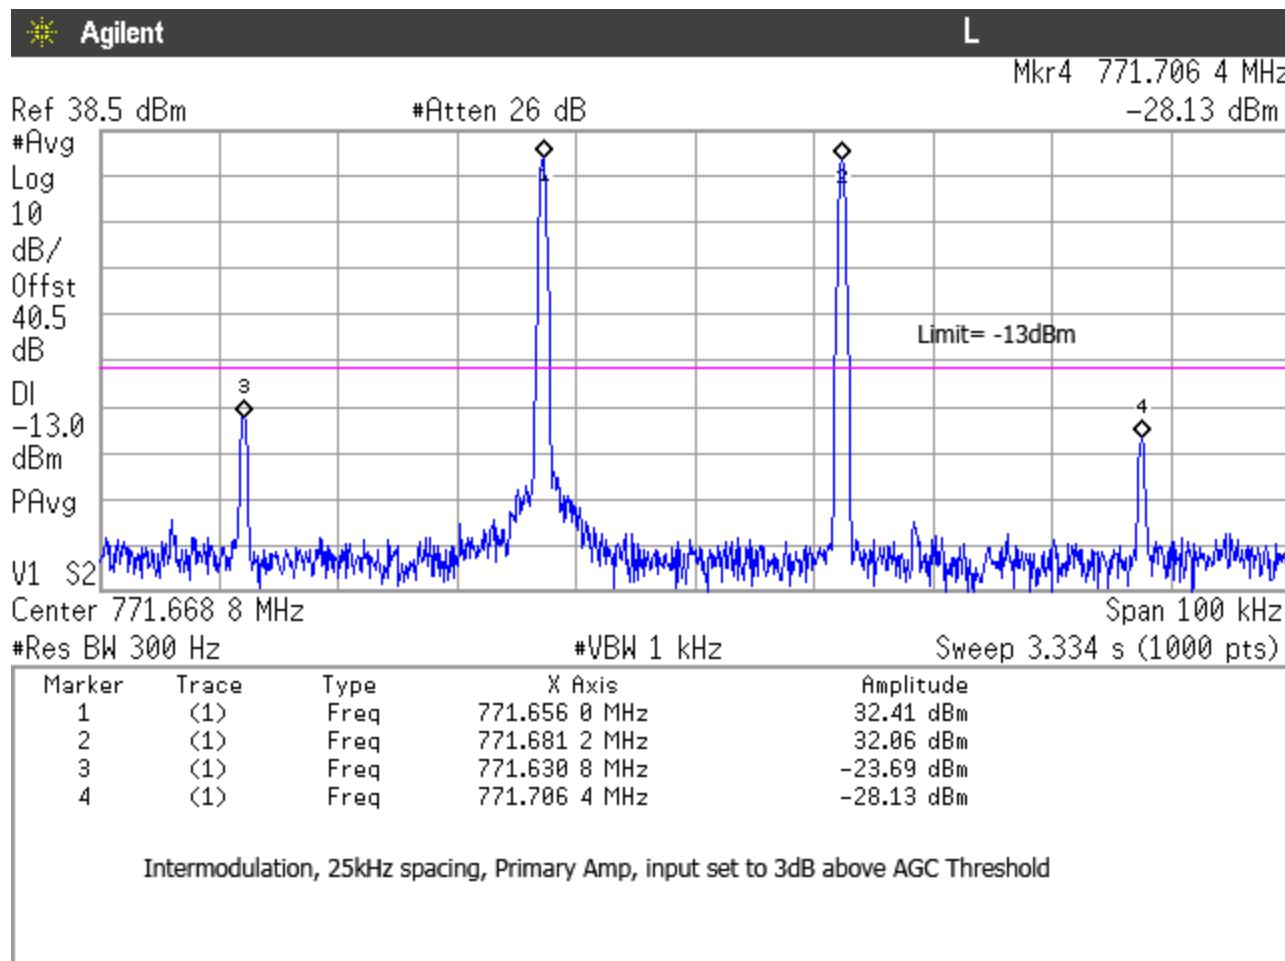


Figure 87: Intermod, 769-775MHz Band, 25kHz, Primary Amp, Input above AGC

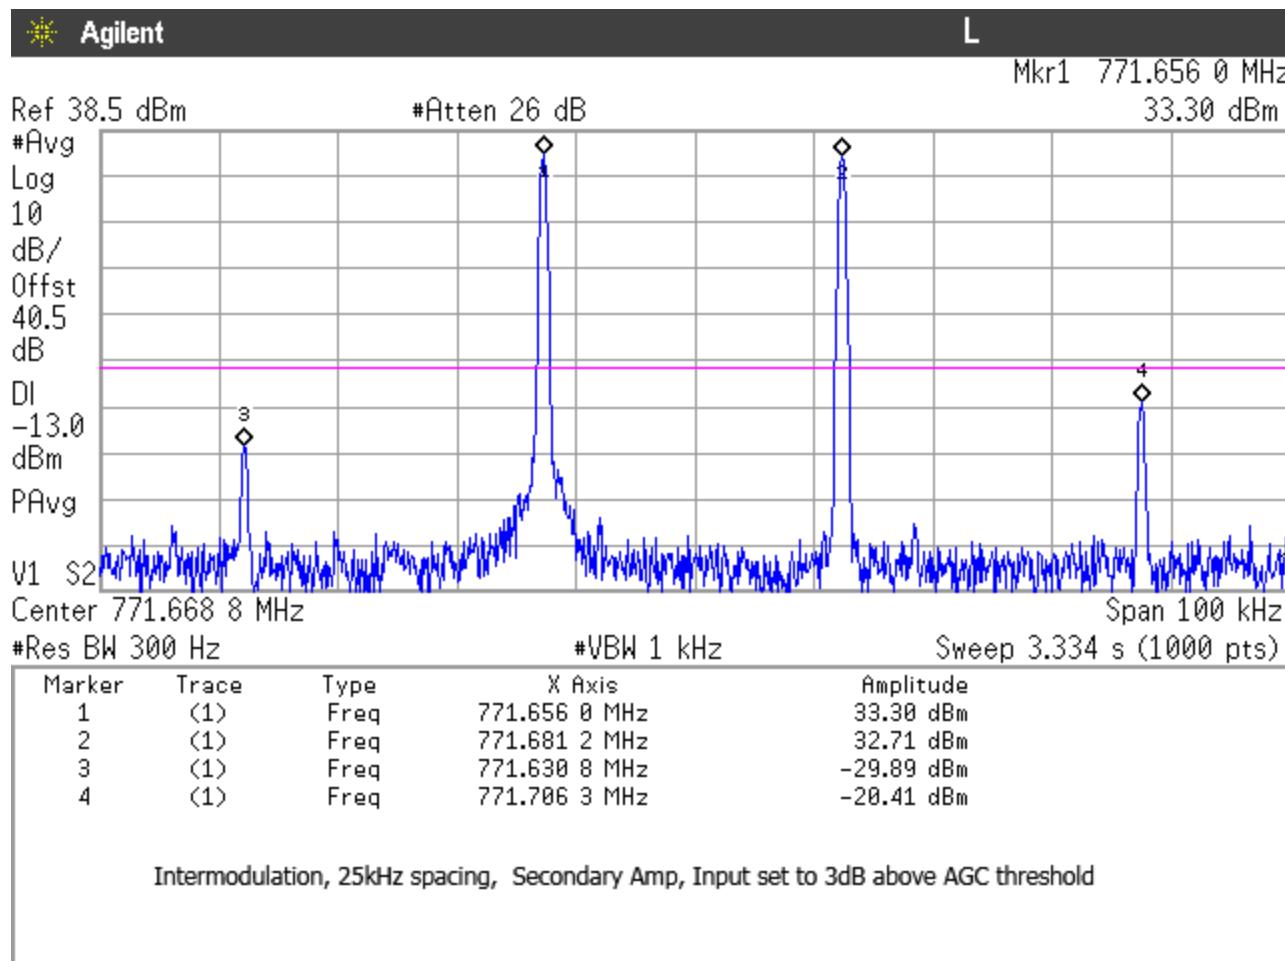


Figure 88: Intermod, 769-775MHz Band, 25kHz, Secondary Amp, Input above AGC

4.6.2 KDB 935210 D05 Section 4.7.3 EUT spurious emissions conducted measurement

- a) Connect a signal generator to the input of the EUT.
- b) Configure the signal generator to produce a CW signal.
- c) Set the frequency of the CW signal to the center channel of the pass band.
- d) Set the output power level so that the resultant signal is just below the AGC threshold (see 4.2).
- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.
- f) Set the RBW to 100 kHz.
- g) Set the VBW = $3 \times$ RBW.
- h) Set the Sweep time = auto-couple. i) Set the detector to PEAK.
- j) Set the analyzer start frequency to 30 MHz (or the lowest radio frequency signal generated in the equipment, without going below 9 kHz if the EUT has internal clock frequencies) and the stop frequency to $10 \times$ the highest allowable frequency of the pass band.
- k) Select MAX HOLD and use the marker peak function to find the highest emission(s) outside the pass band. (This could be either at a frequency lesser or greater than the pass band.)
- l) Capture a plot for inclusion in the test report.
- m) Repeat steps c) to l) for each authorized frequency band/block of operation.

4.6.2.1 Results

No out of band spurious emissions exceeded the limits in any band of operation. See Figure 89 through Figure 100 for the plots of the spurious emissions

The EUT complies with FCC 219(e)(3) that a booster must not exceed -13dBm in any 100kHz bandwidth.

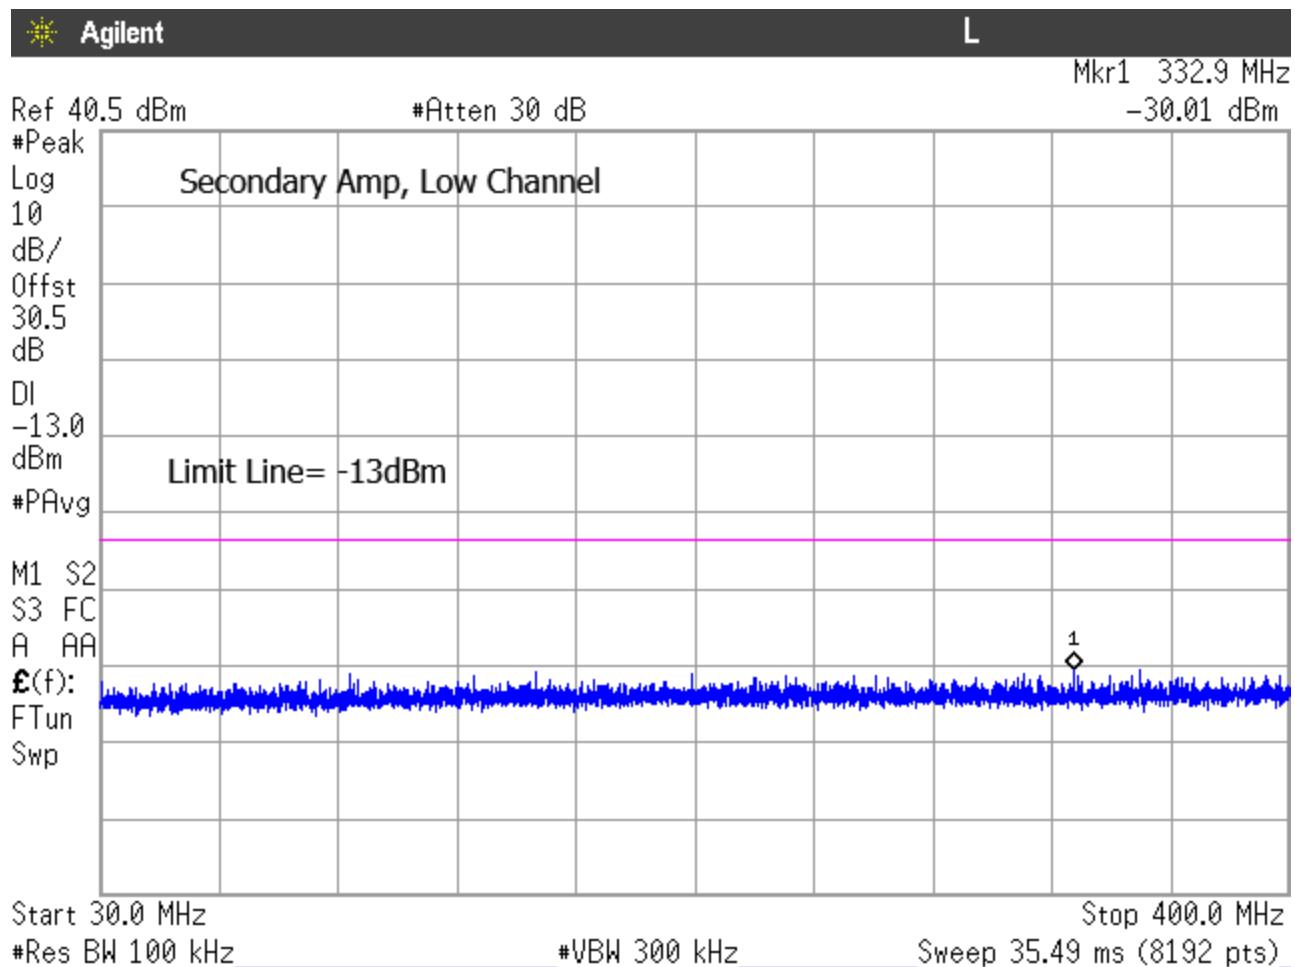


Figure 89: Conducted Spurious 769-775MHz, Primary Amp, Low Channel 30-400MHz

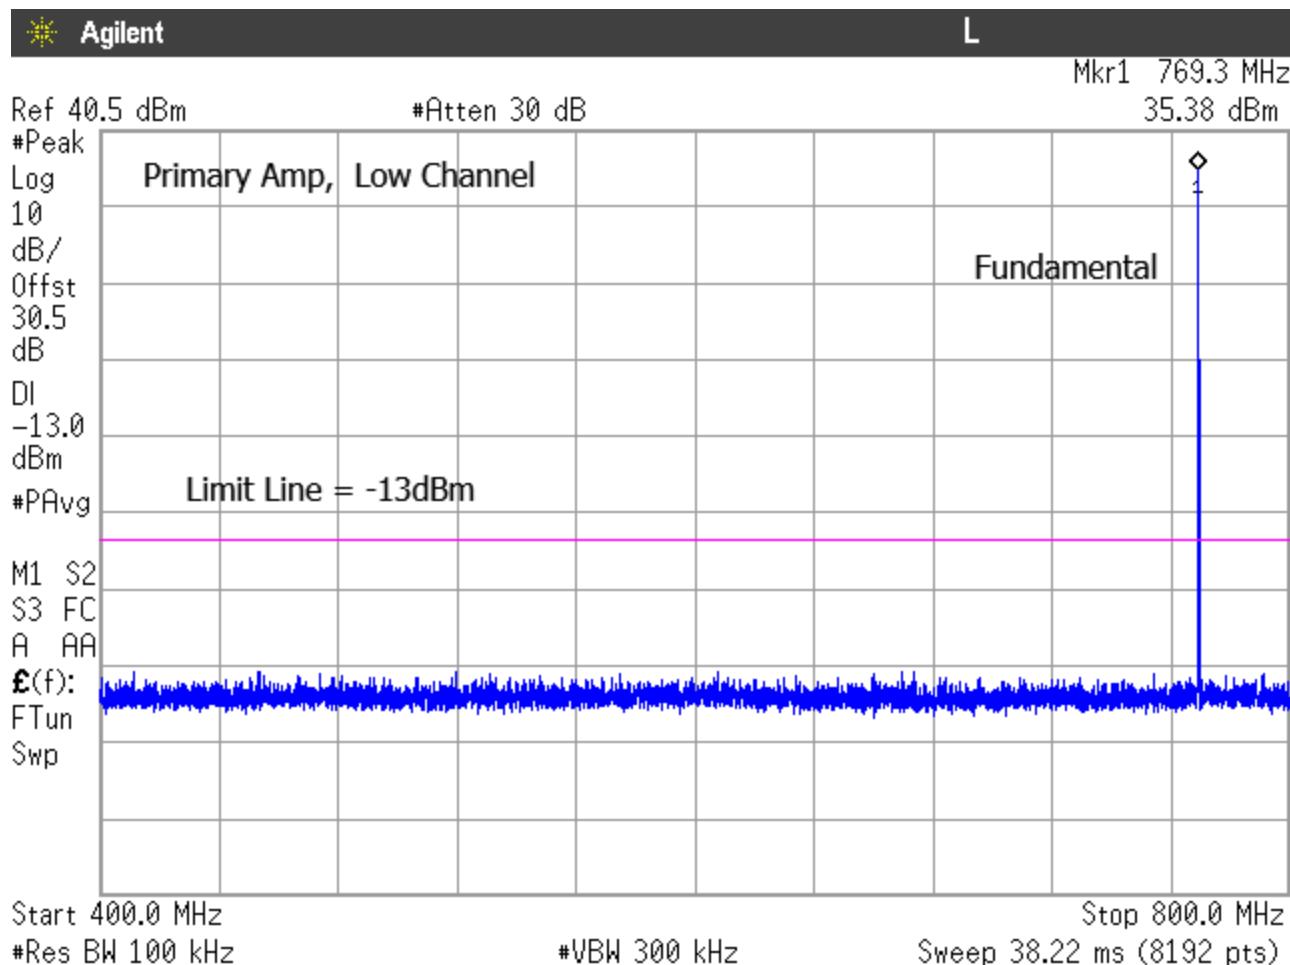


Figure 90: Conducted Spurious 769-775MHz, Primary Amp, Low Channel 400-800MHz

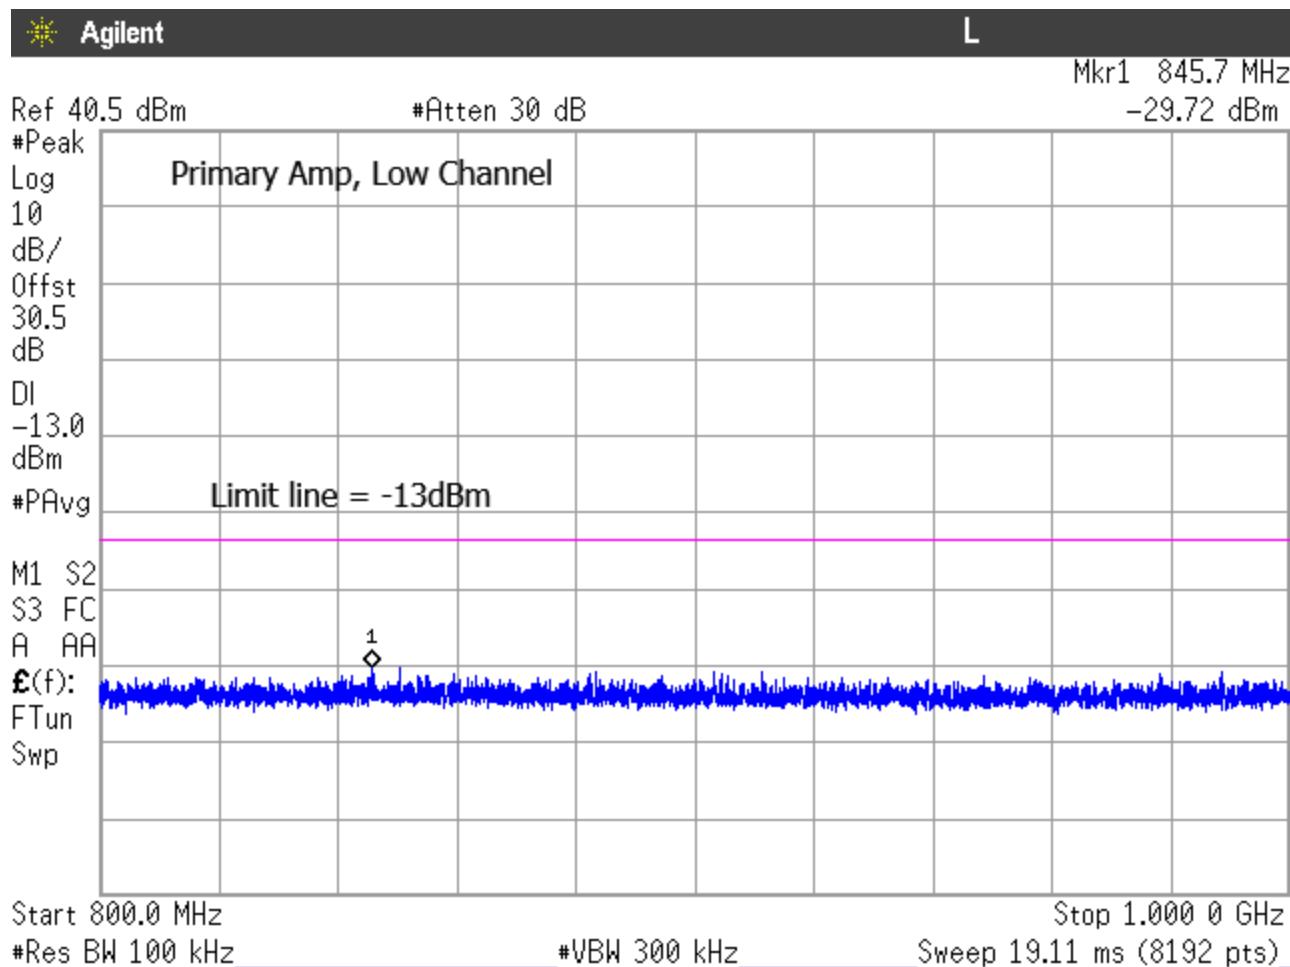


Figure 91: Conducted Spurious 769-775MHz, Primary Amp, Low Channel 800-1000MHz

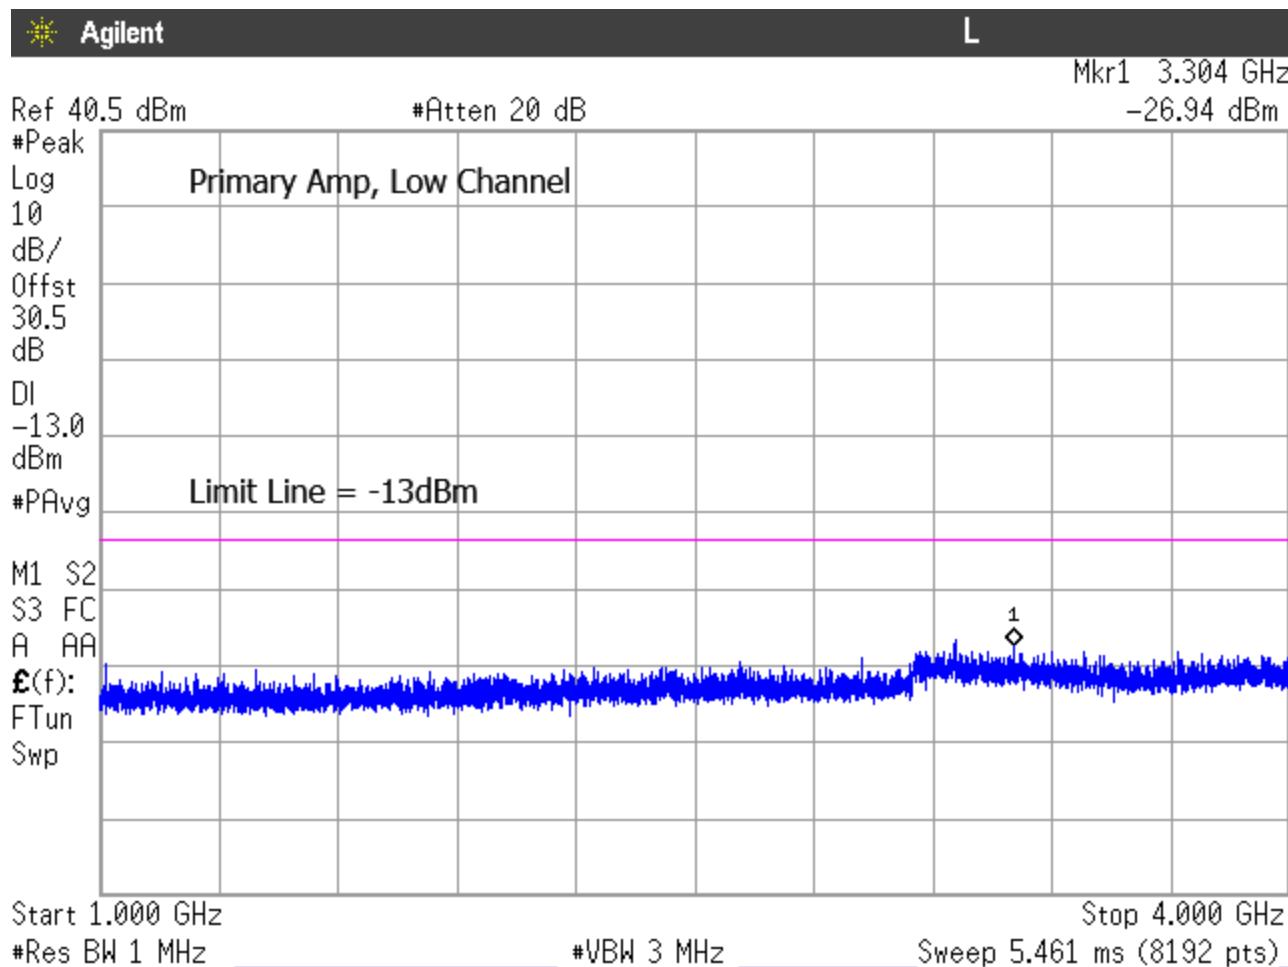


Figure 92: Conducted Spurious 769-775MHz, Primary Amp, Low Channel 1-4GHz

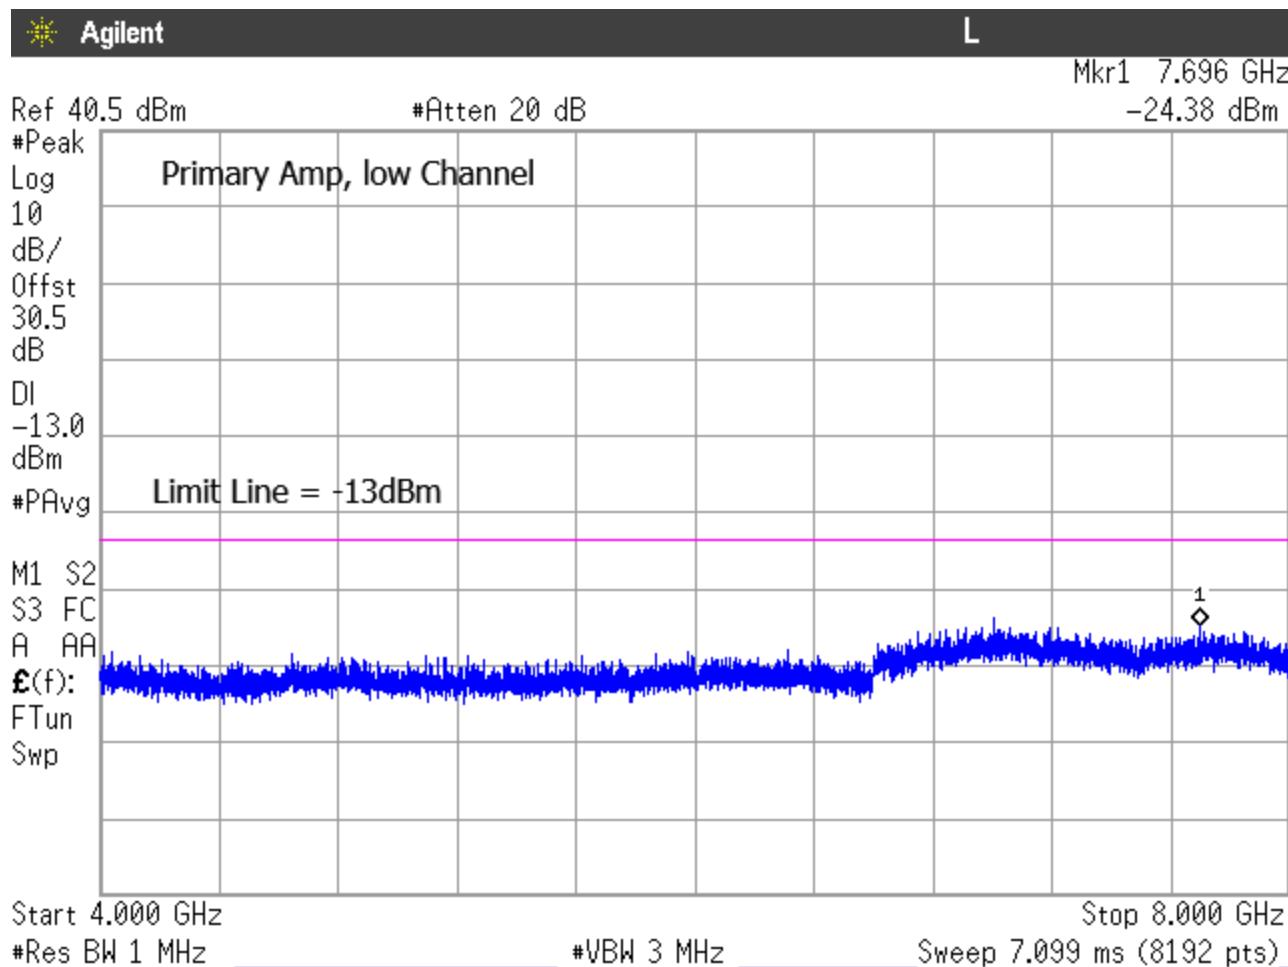


Figure 93: Conducted Spurious 769-775MHz, Primary Amp, Low Channel 4-8GHz

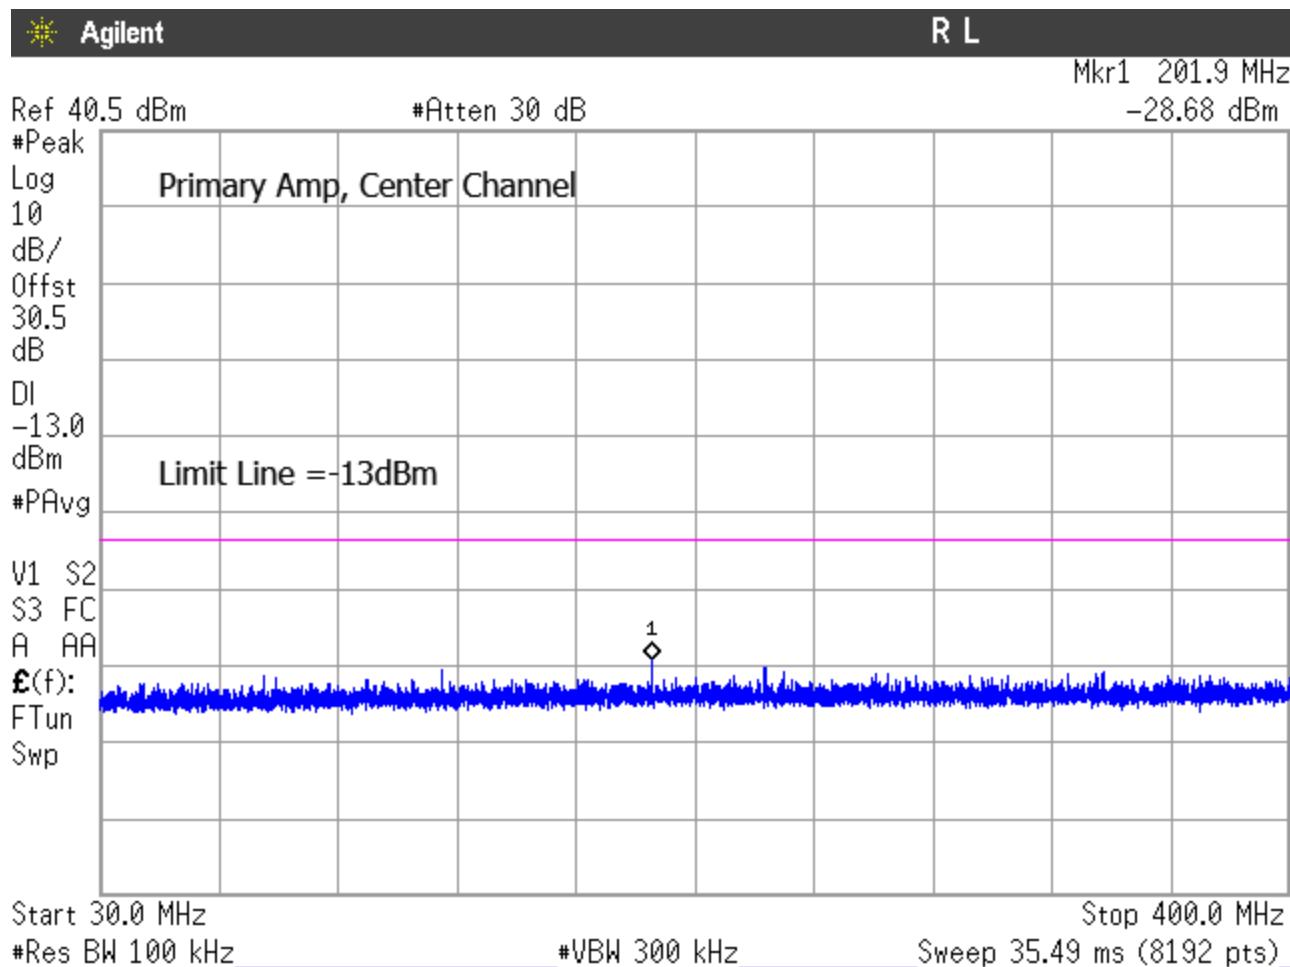


Figure 94: Conducted Spurious 769-775MHz, Primary Amp, Center Channel 30-400MHz

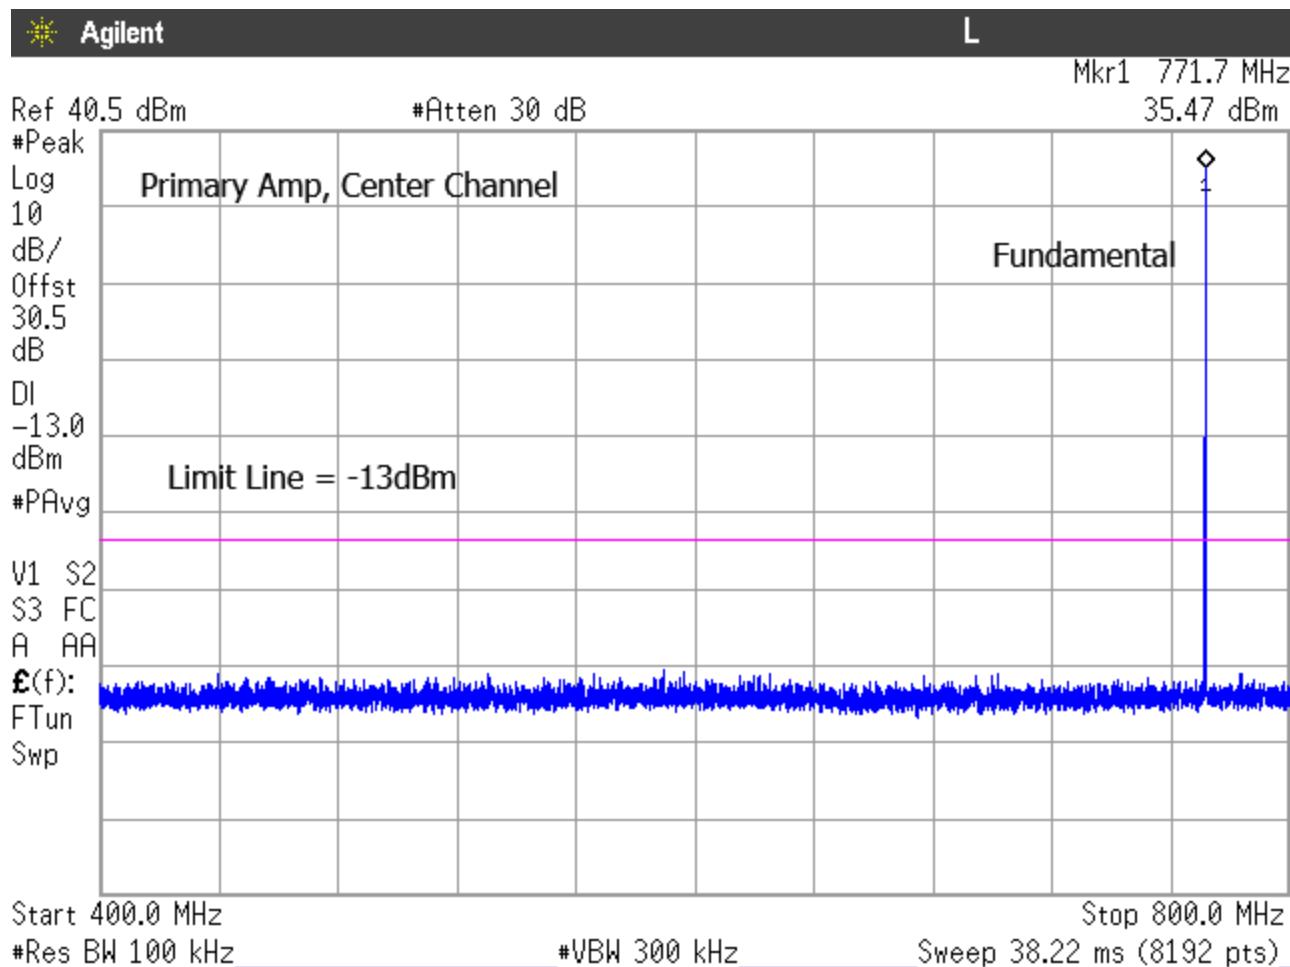


Figure 95: Conducted Spurious 769-775MHz, Primary Amp, Center Channel 400-800MHz

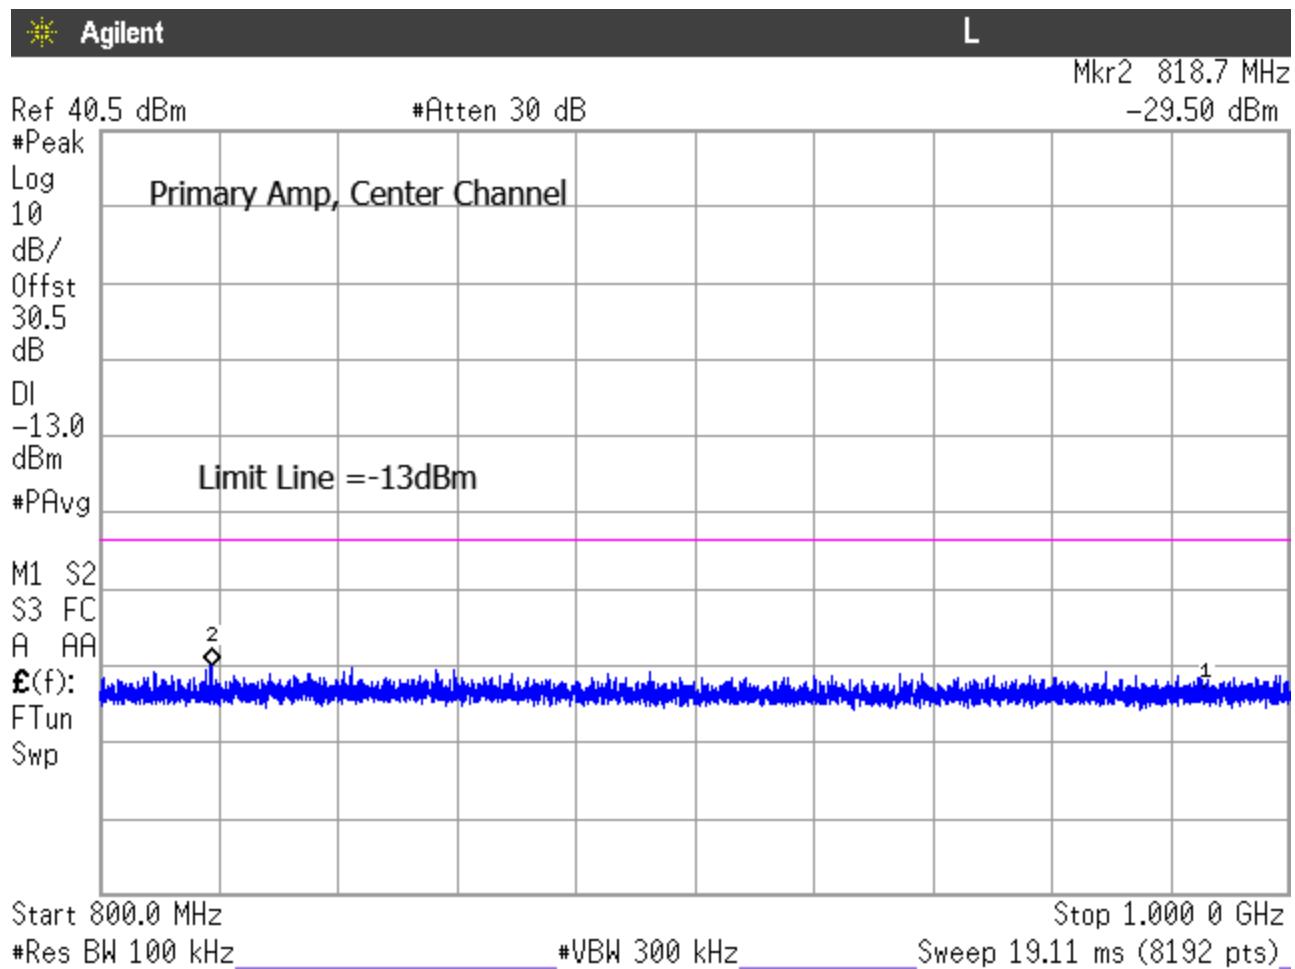


Figure 96: Conducted Spurious 769-775MHz, Primary Amp, Center Channel 800-1000MHz

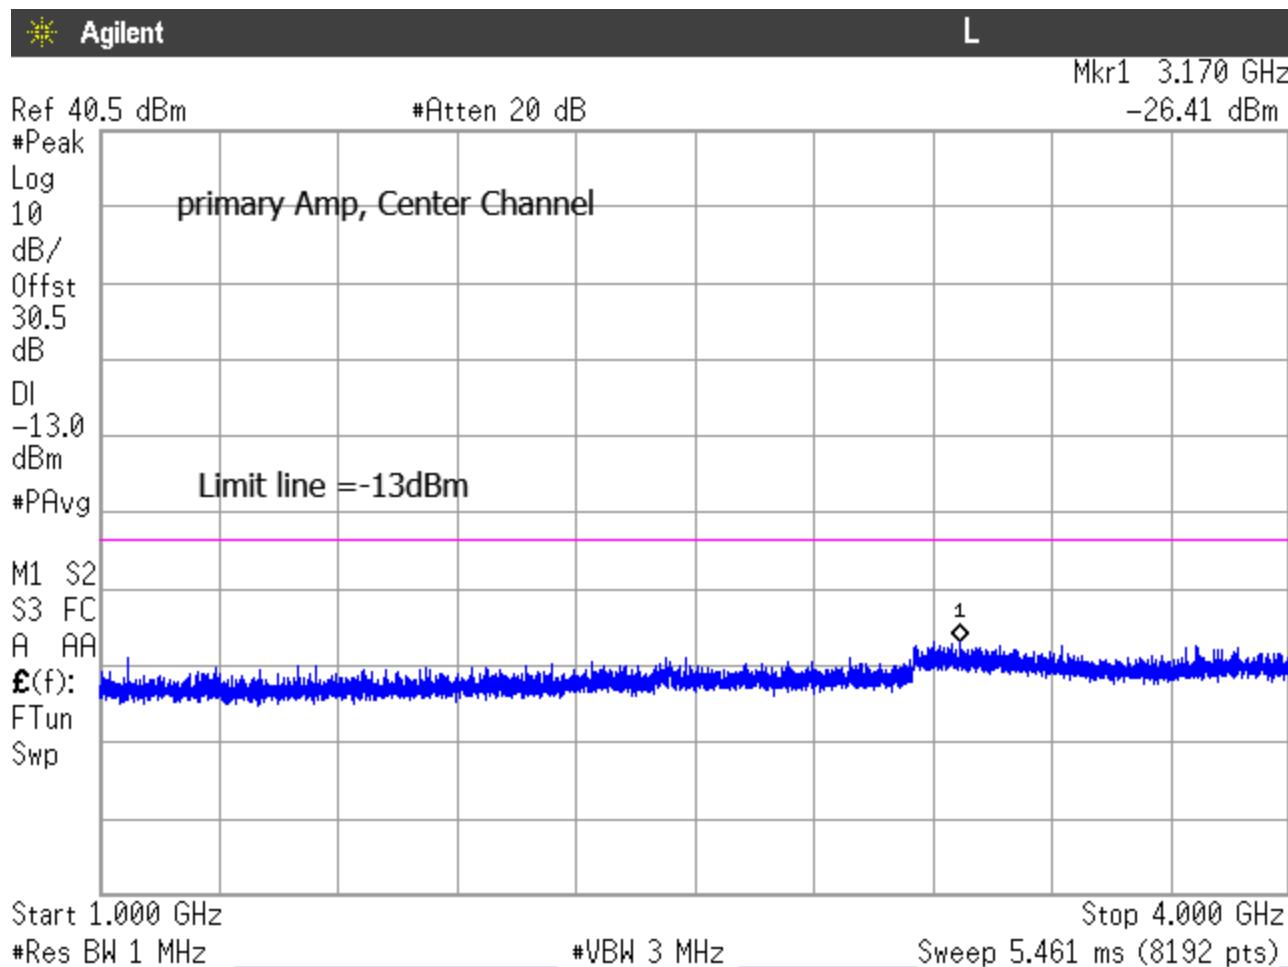


Figure 97: Conducted Spurious 769-775MHz, Primary Amp, Center Channel 1-4GHz

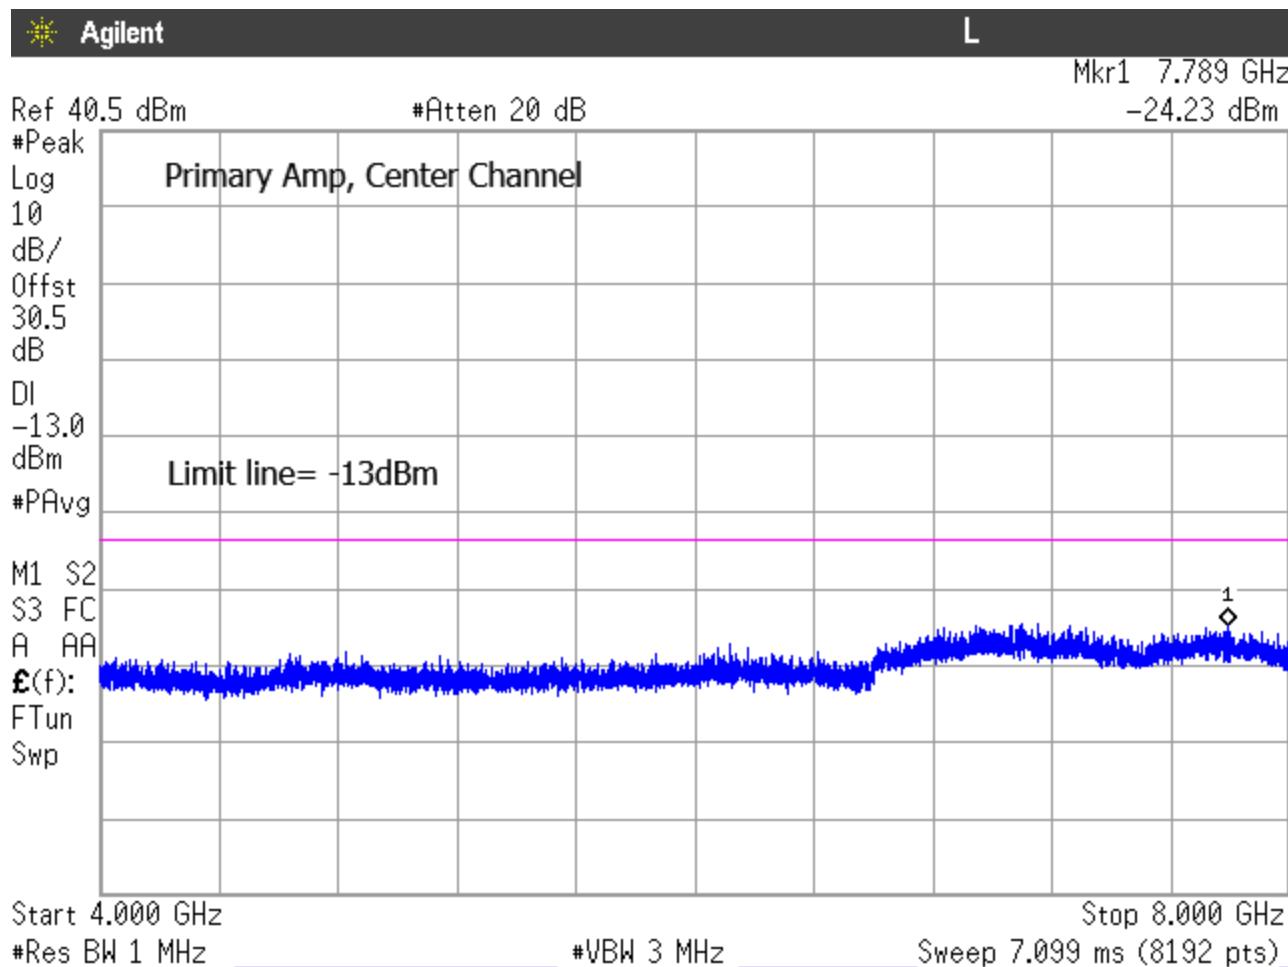


Figure 98: Conducted Spurious 769-775MHz, Primary Amp, Center Channel 4-8GHz

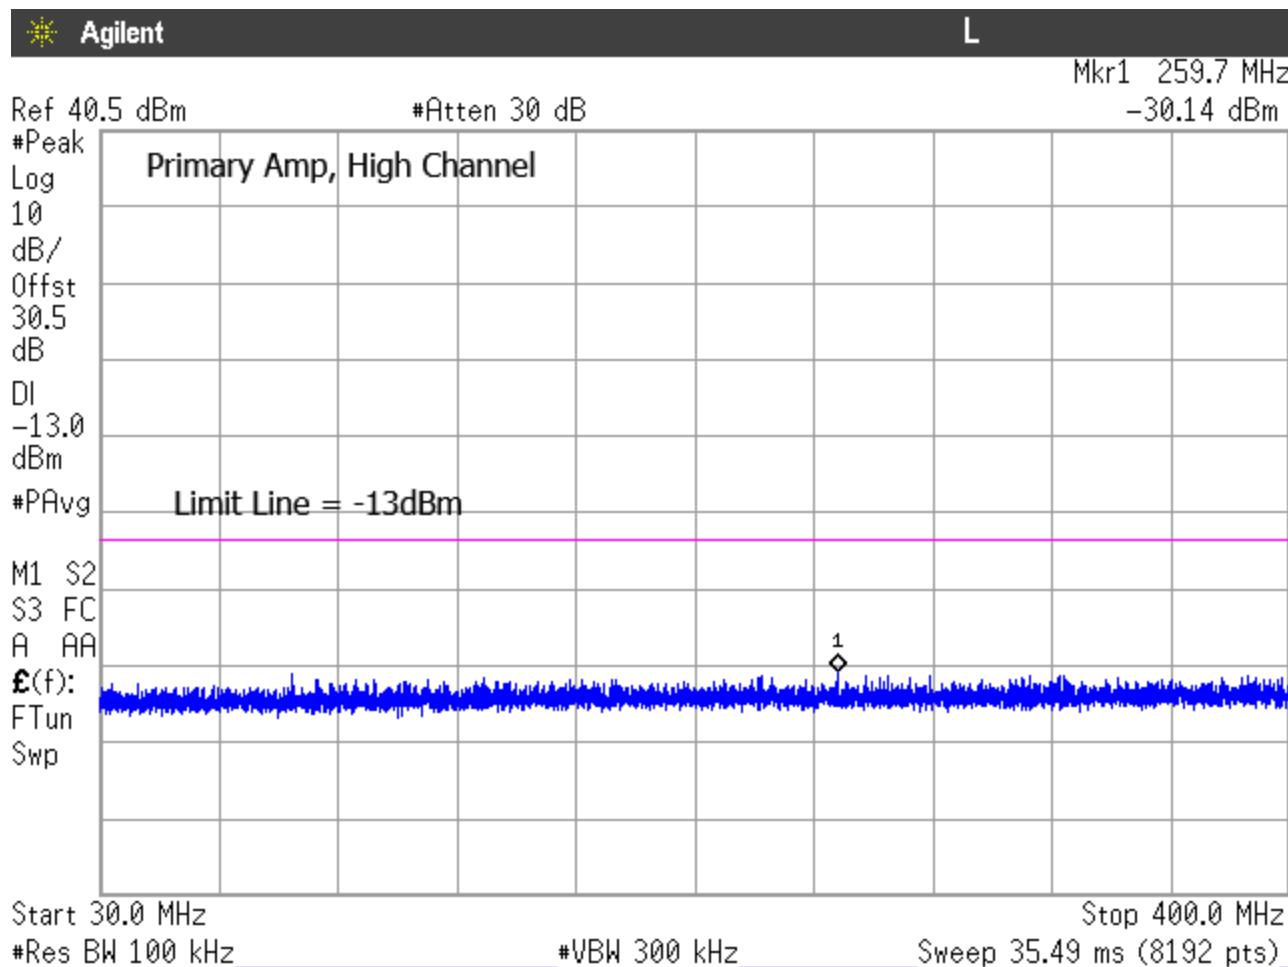


Figure 99: Conducted Spurious 769-775MHz, Primary Amp, High Channel 30-400MHz

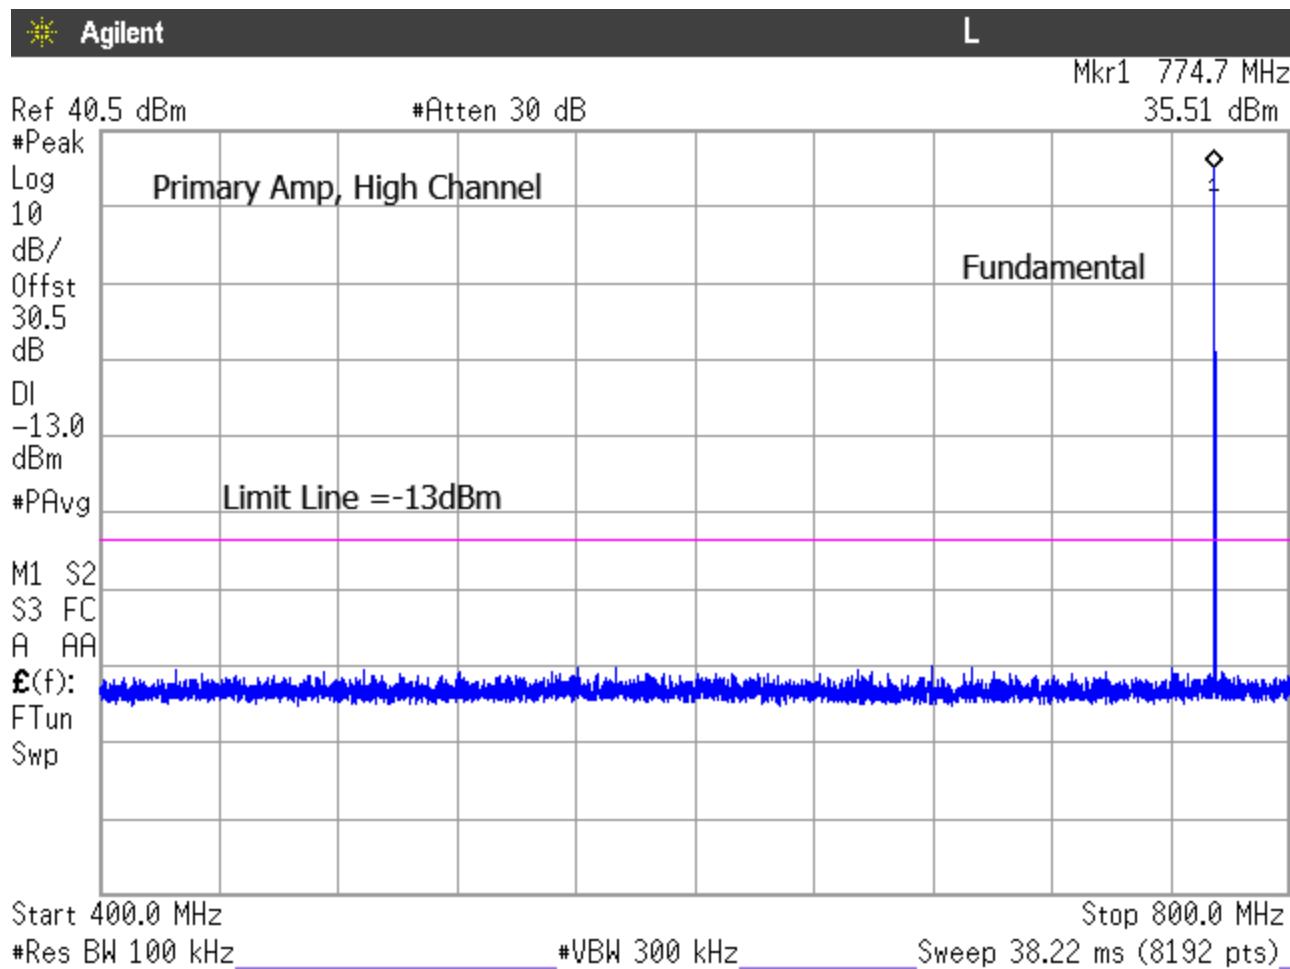


Figure 100: Conducted Spurious 769-775MHz, Primary Amp, High Channel 400-800MHz

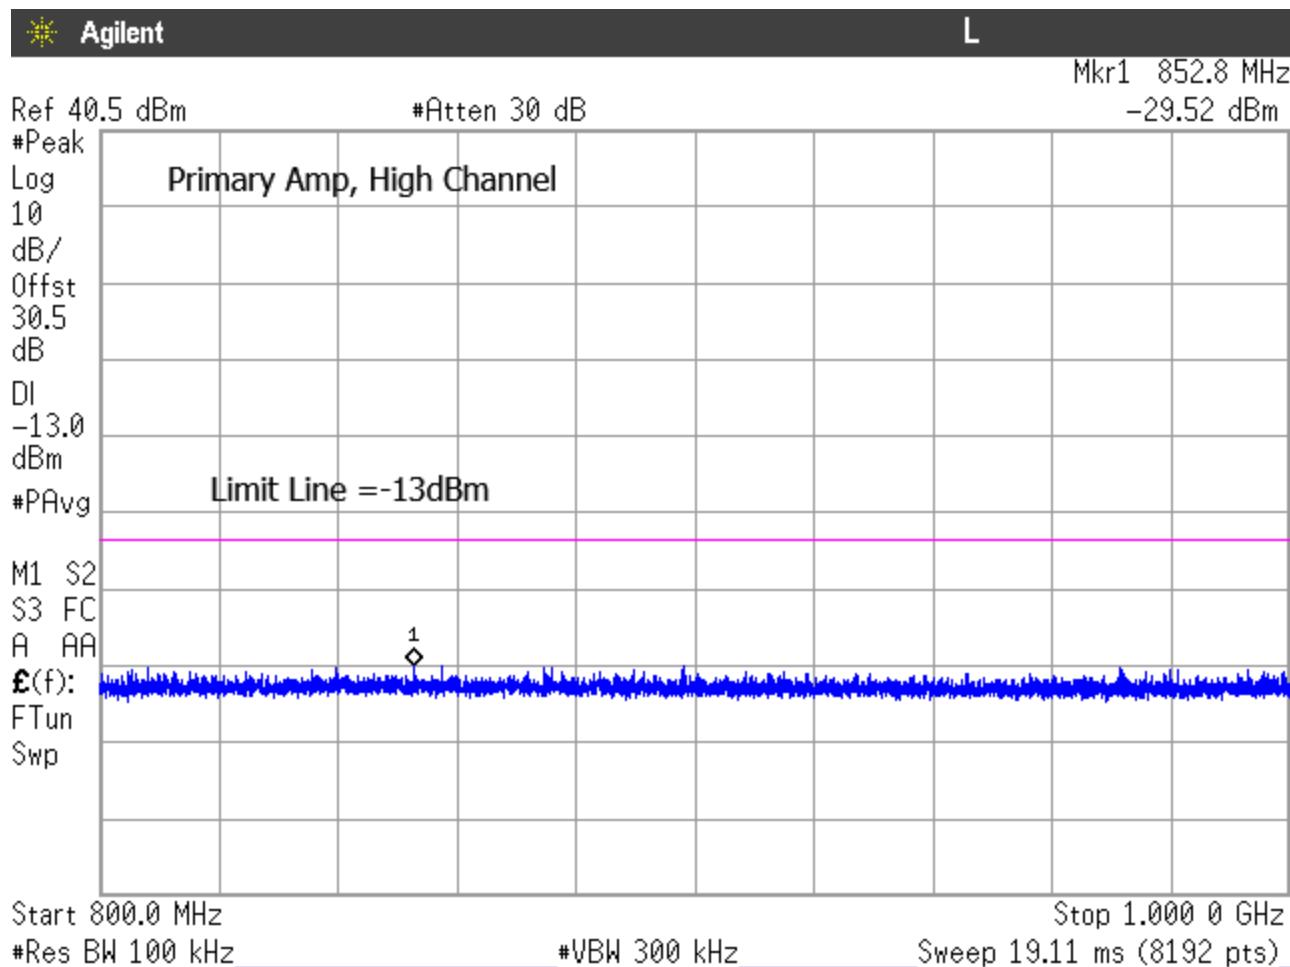


Figure 101: Conducted Spurious 769-775MHz, Primary Amp, High Channel 800-1000MHz

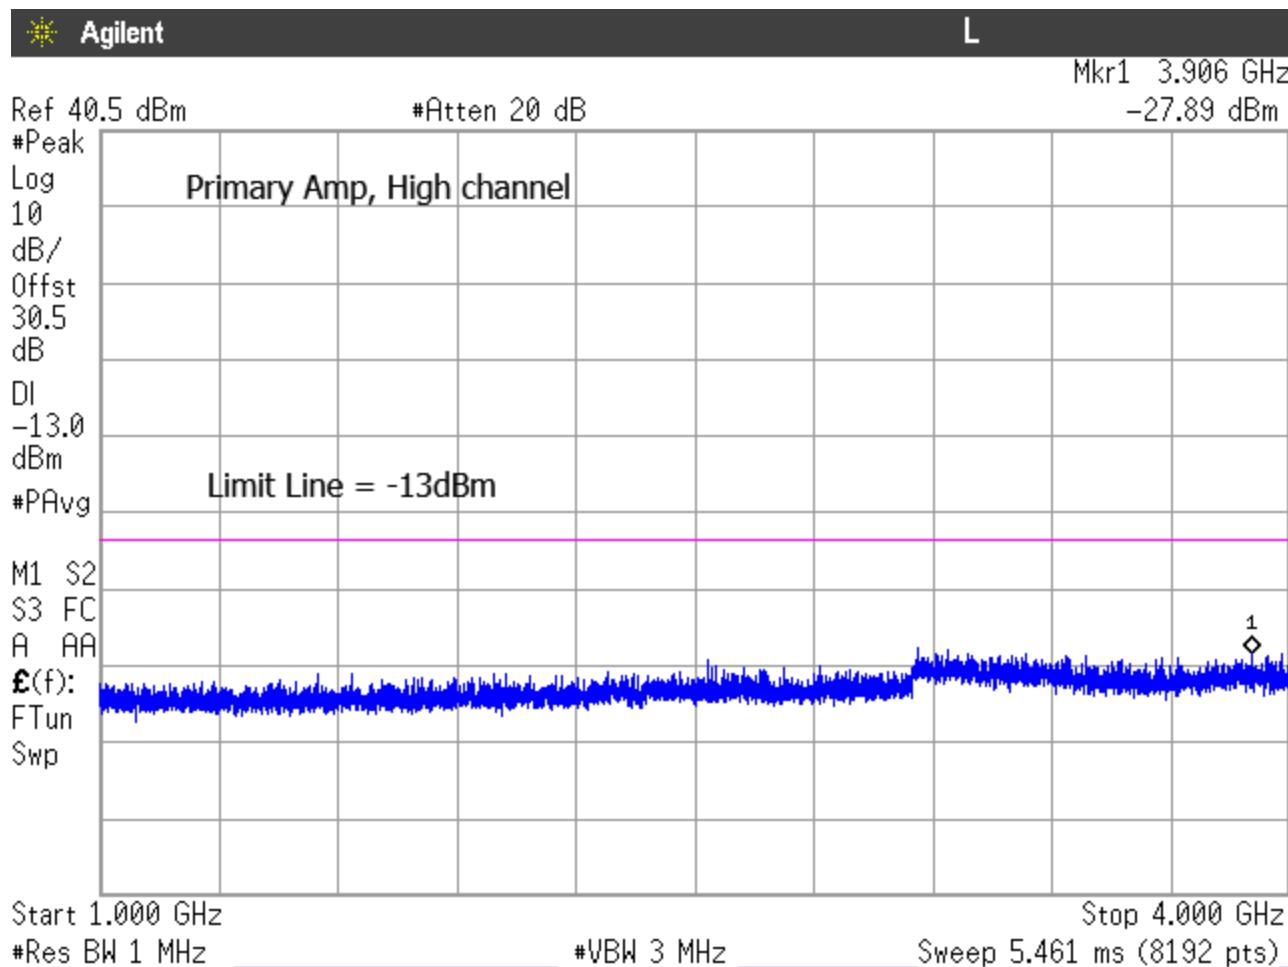


Figure 102: Conducted Spurious 769-775MHz, Primary Amp, High Channel 1-4GHz

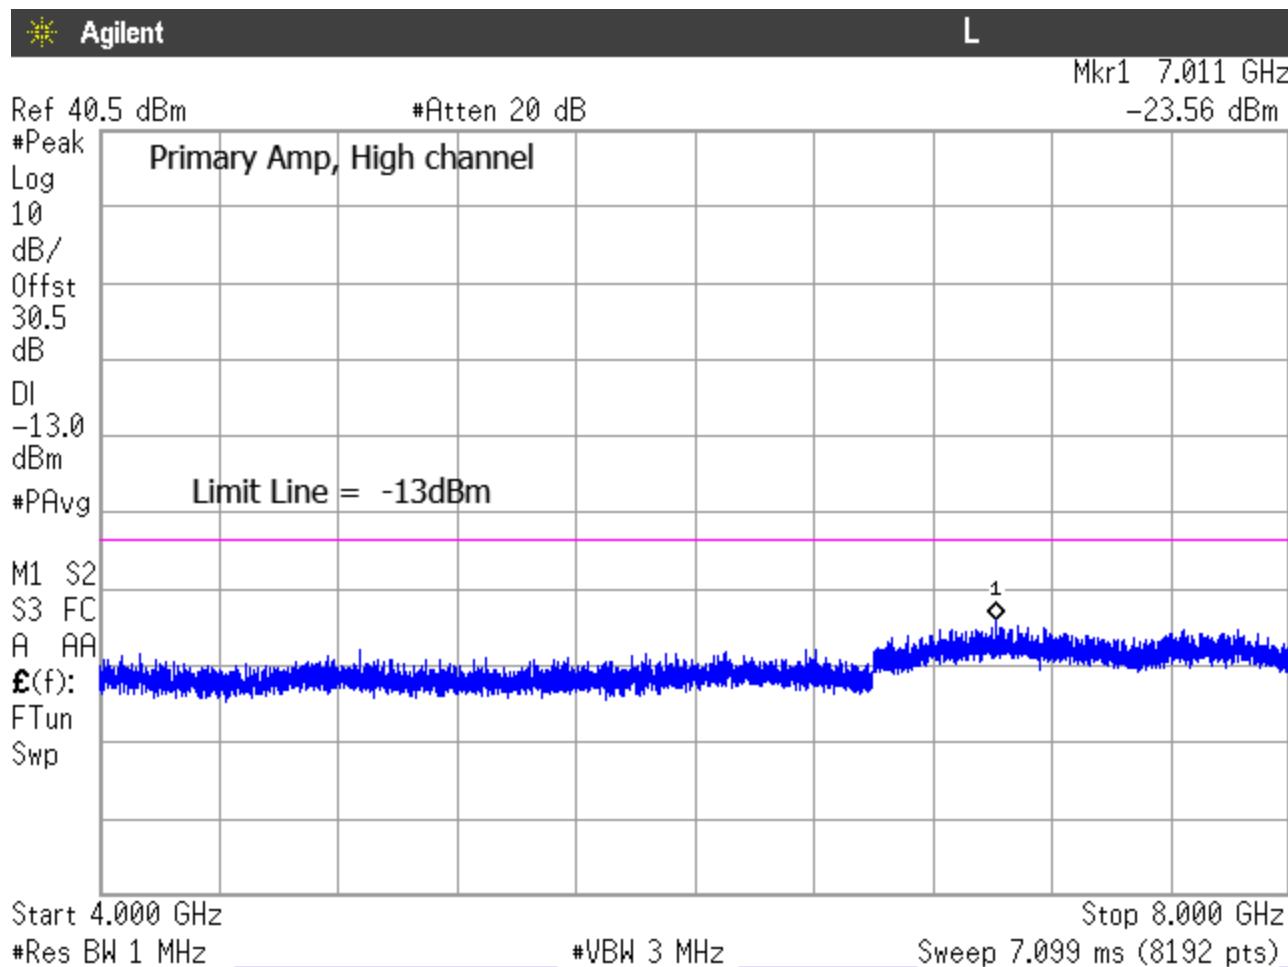


Figure 103: Conducted Spurious 769-775MHz, Primary Amp, High Channel 4-8GHz

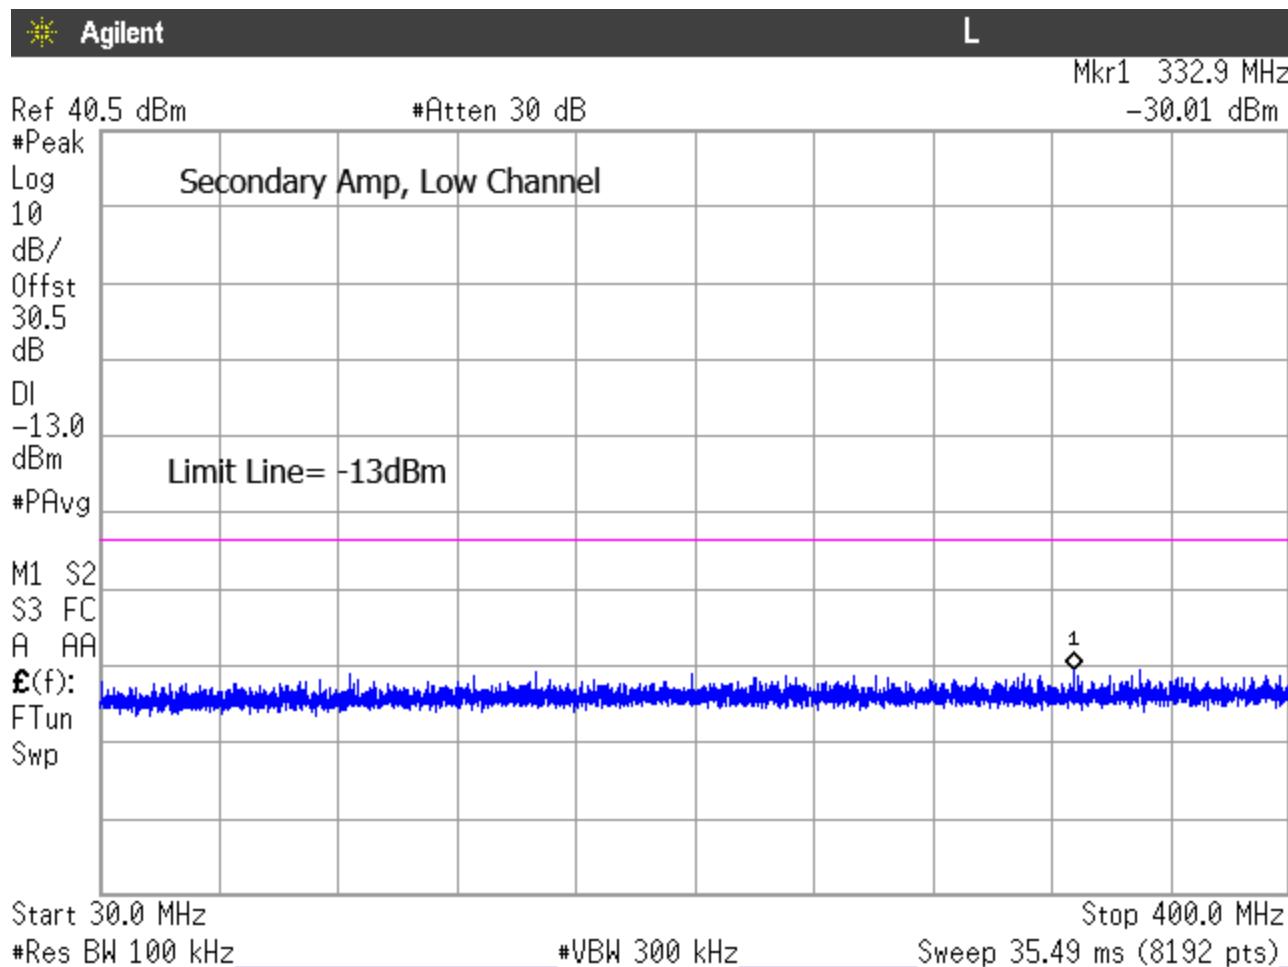


Figure 104: Conducted Spurious 769-775MHz, Secondary Amp, Low Channel 30-400MHz

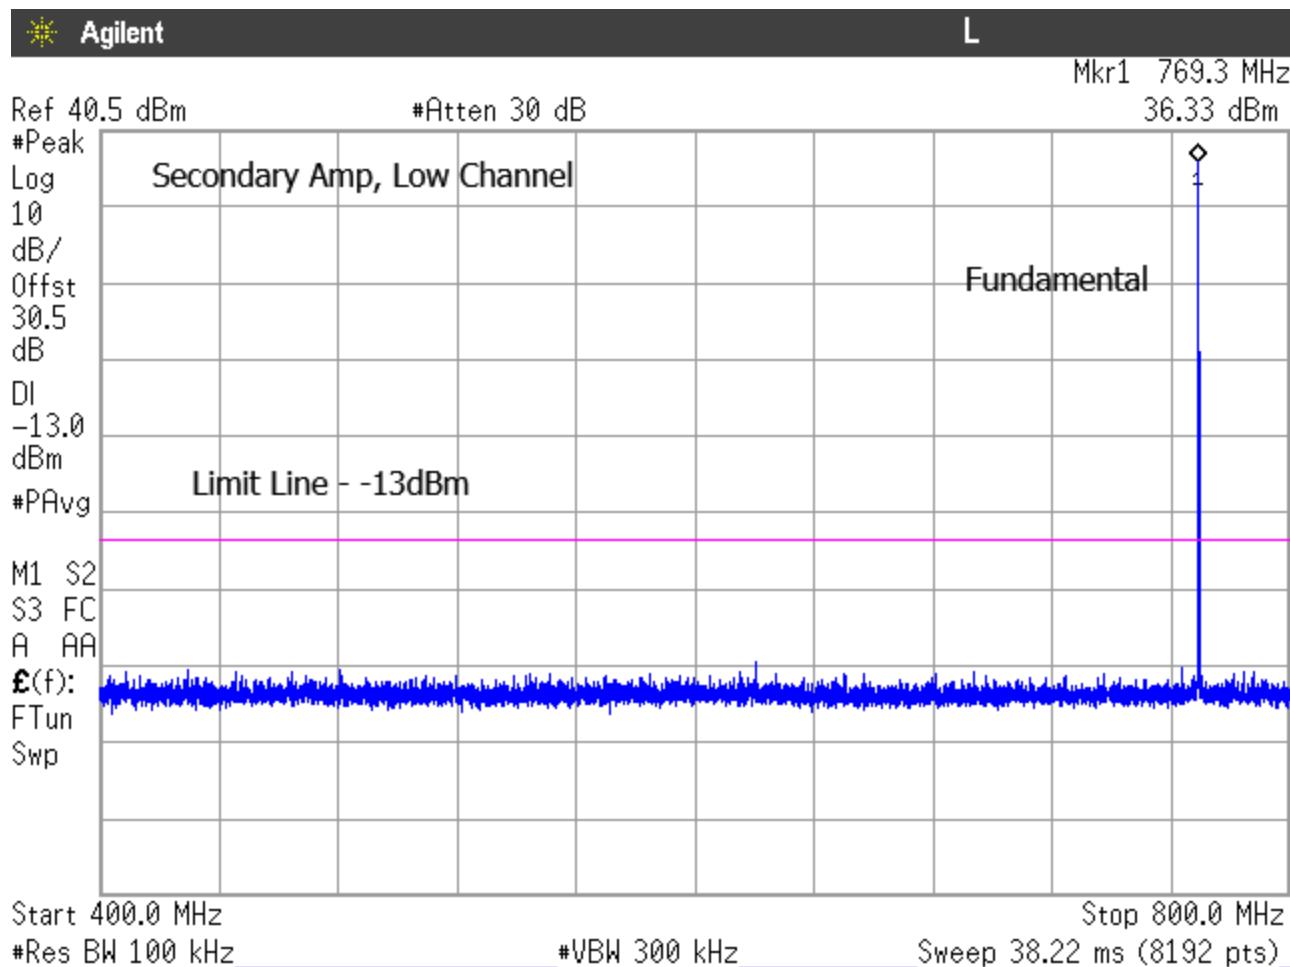


Figure 105: Conducted Spurious 769-775MHz, Secondary Amp, Low Channel 400-800MHz

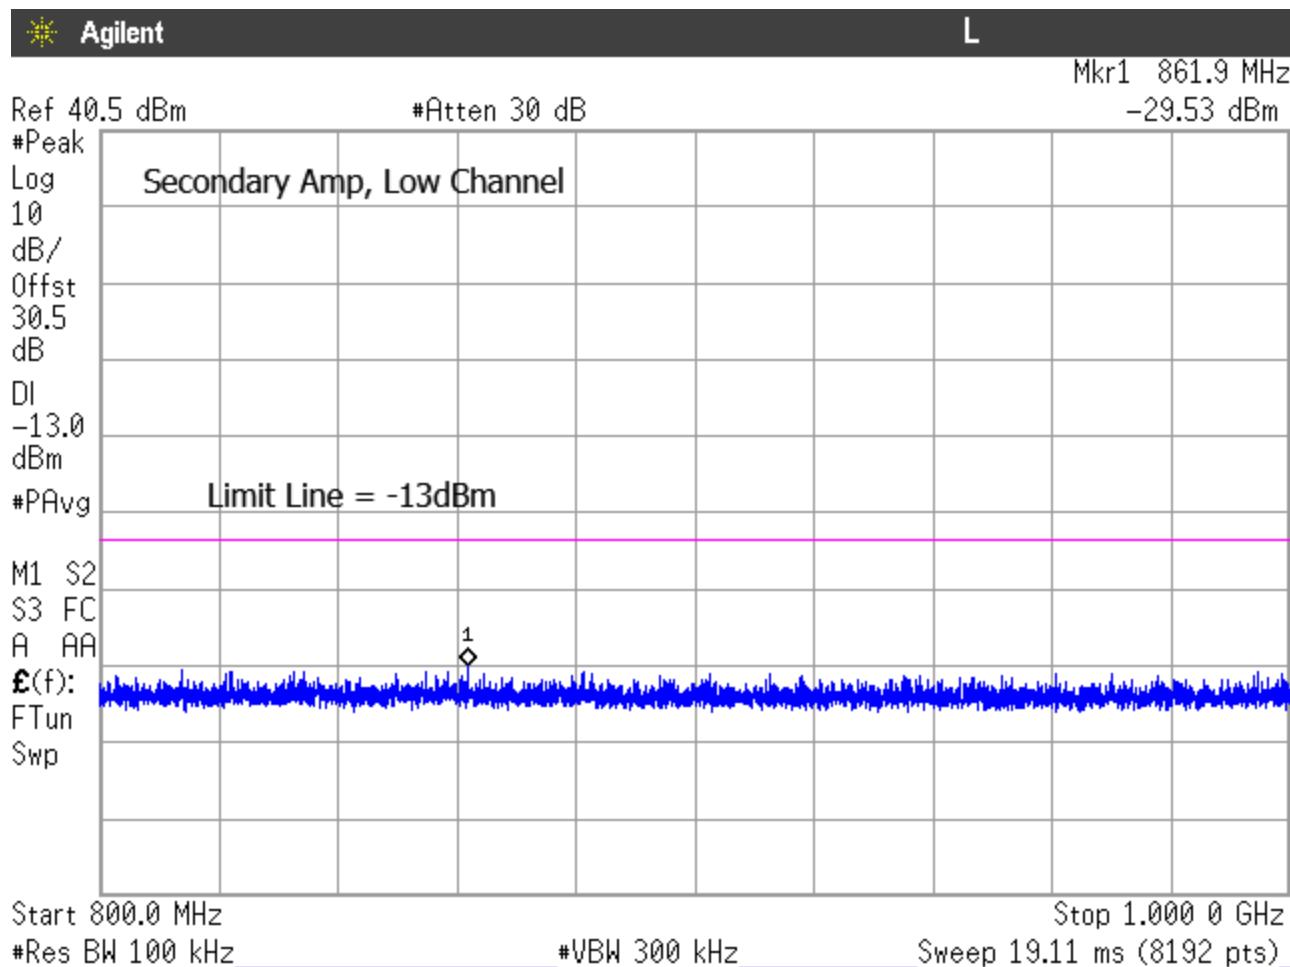


Figure 106: Conducted Spurious 769-775MHz, Secondary Amp, Low Channel 800-1000MHz

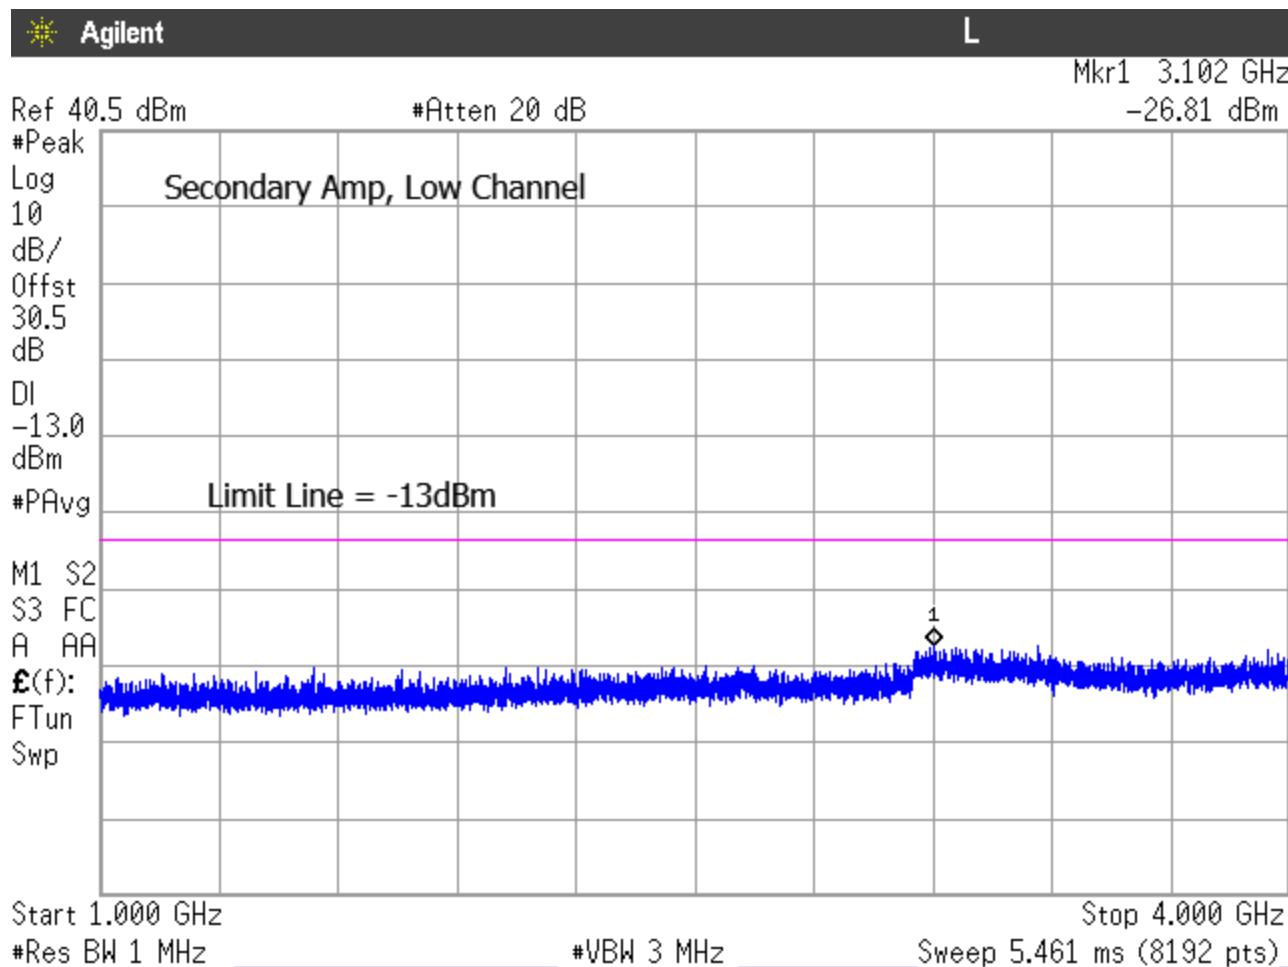


Figure 107: Conducted Spurious 769-775MHz, Secondary Amp, Low Channel 1-4GHz

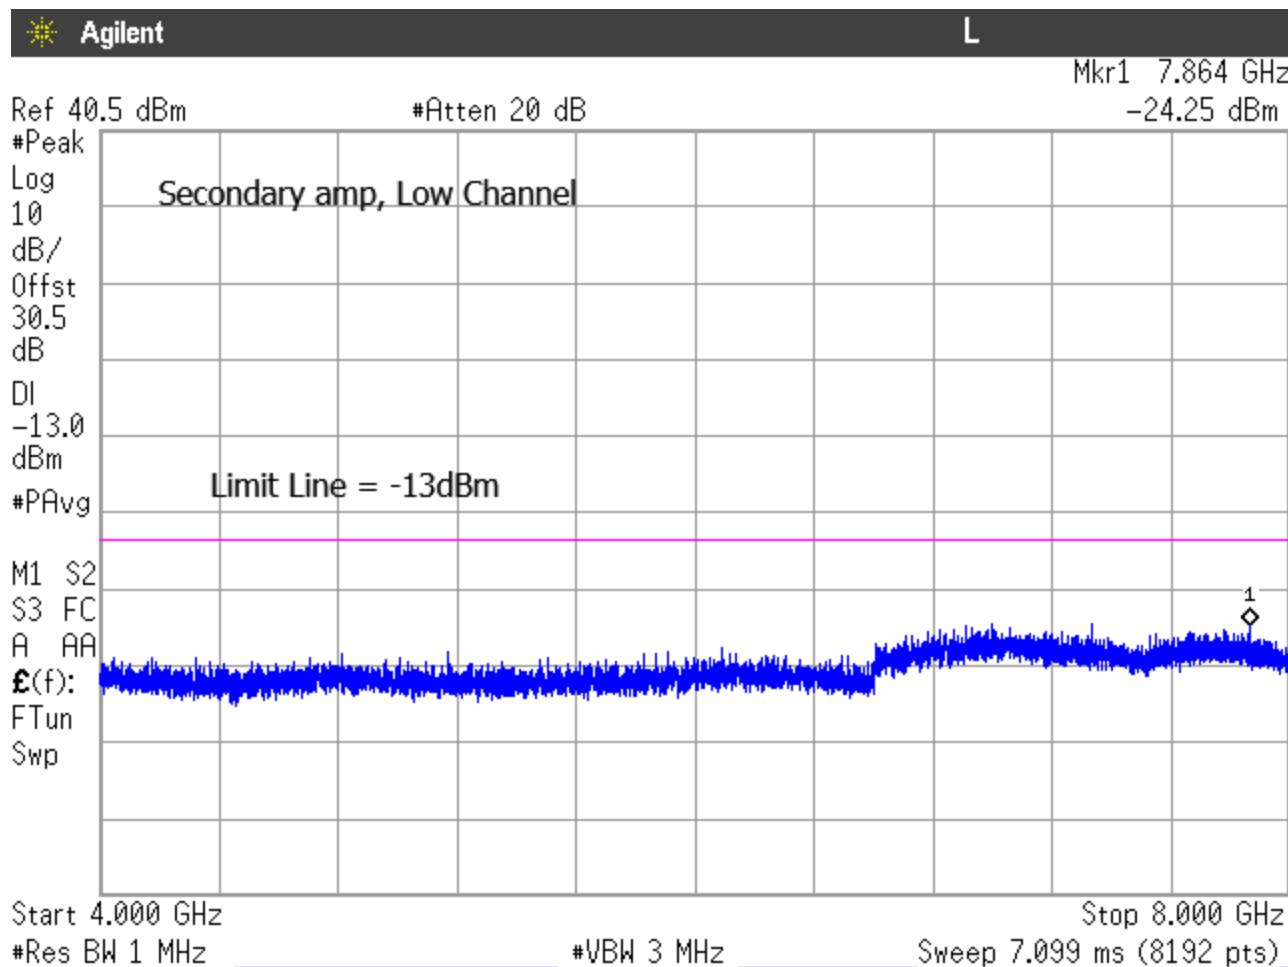


Figure 108: Conducted Spurious 769-775MHz, Secondary Amp, Low Channel 4-8GHz

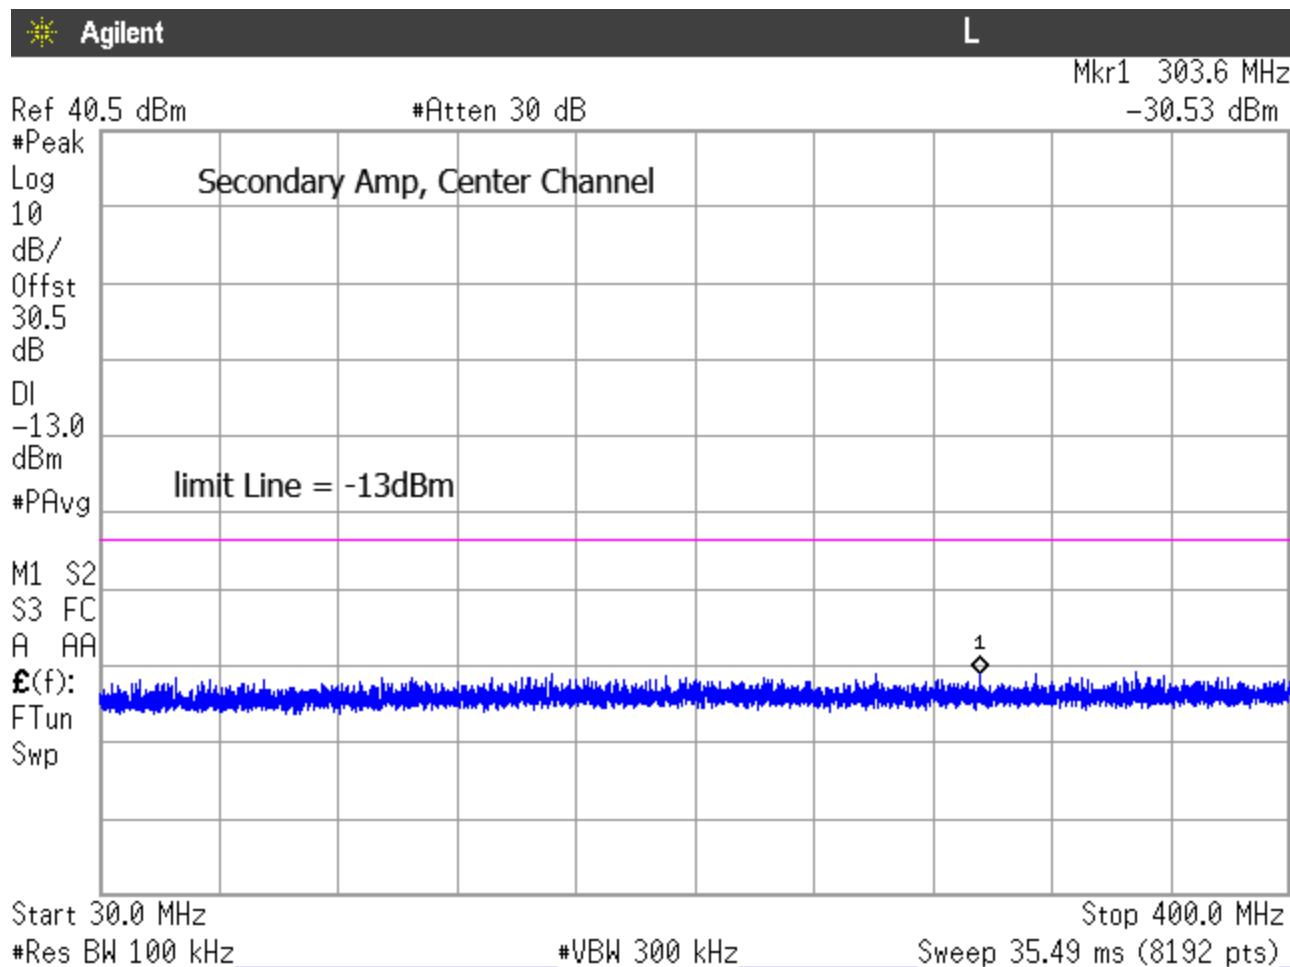


Figure 109: Conducted Spurious 769-775MHz, Secondary Amp, Center Channel 30-400MHz

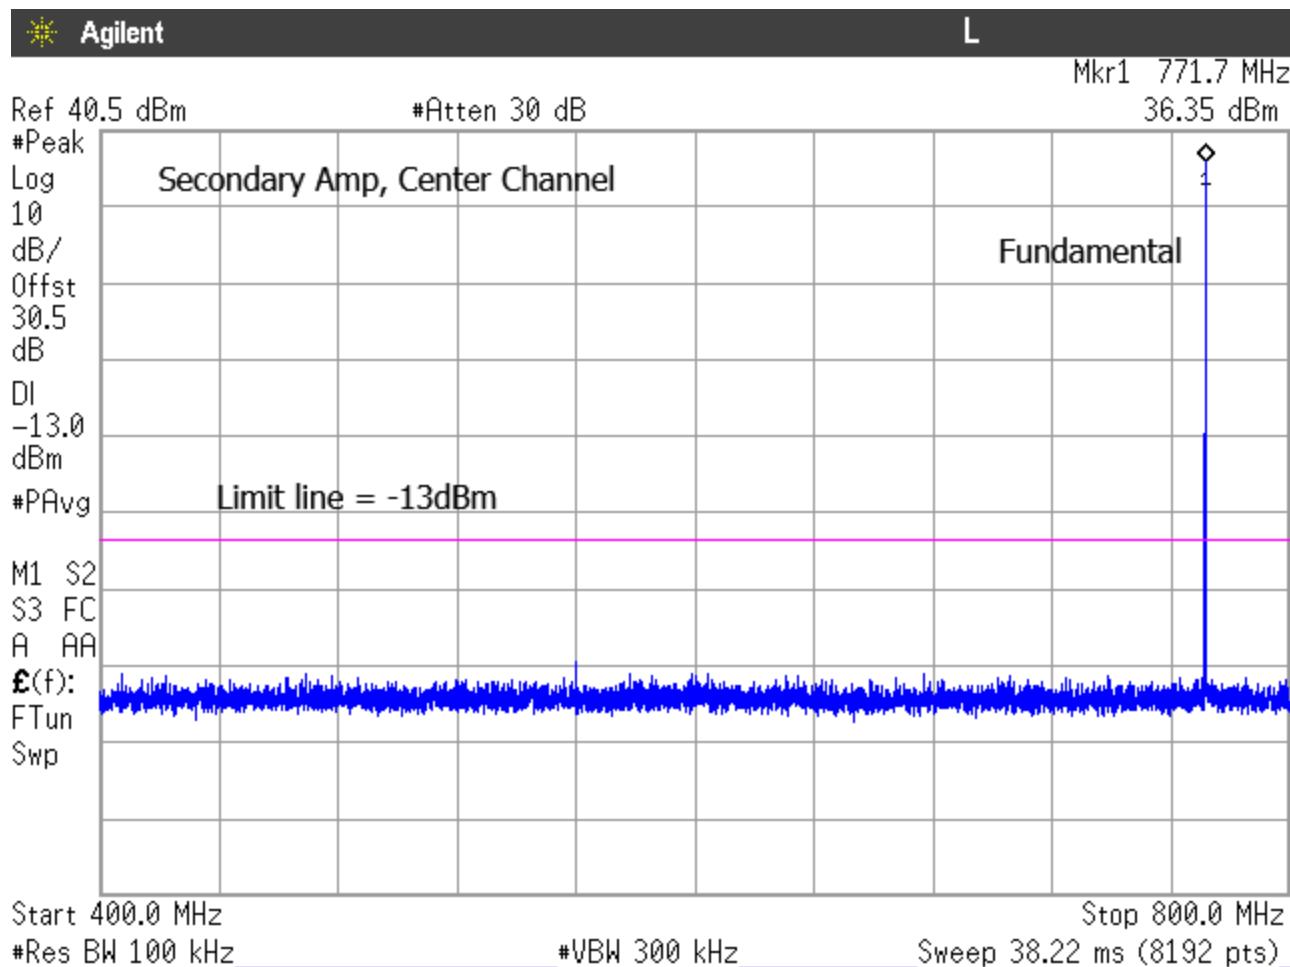


Figure 110: Conducted Spurious 769-775MHz, Secondary Amp, Center Channel 400-800MHz

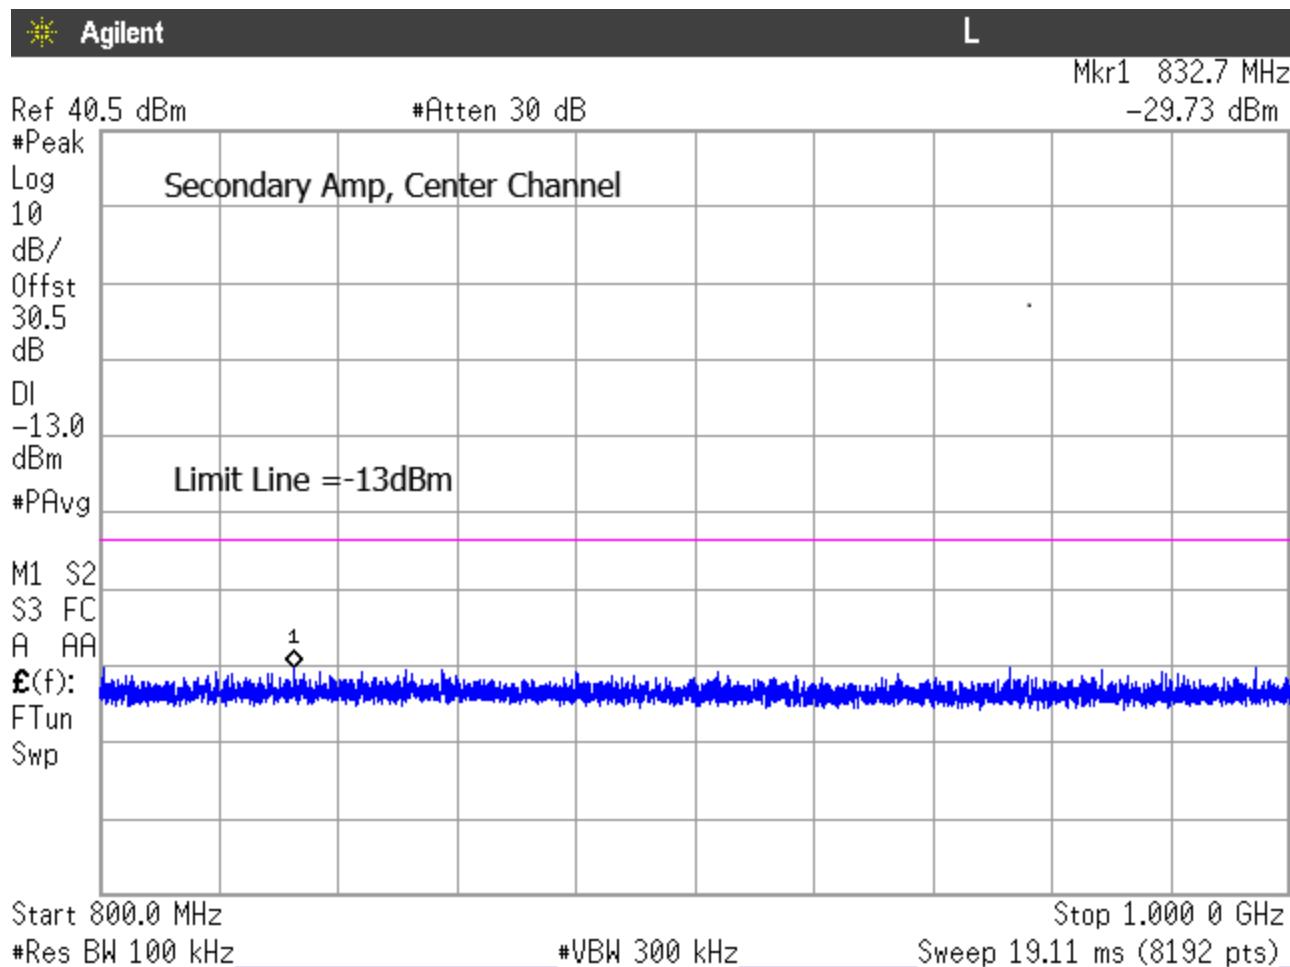


Figure 111: Conducted Spurious 769-775MHz, Secondary Amp, Center Channel 800-1000MHz

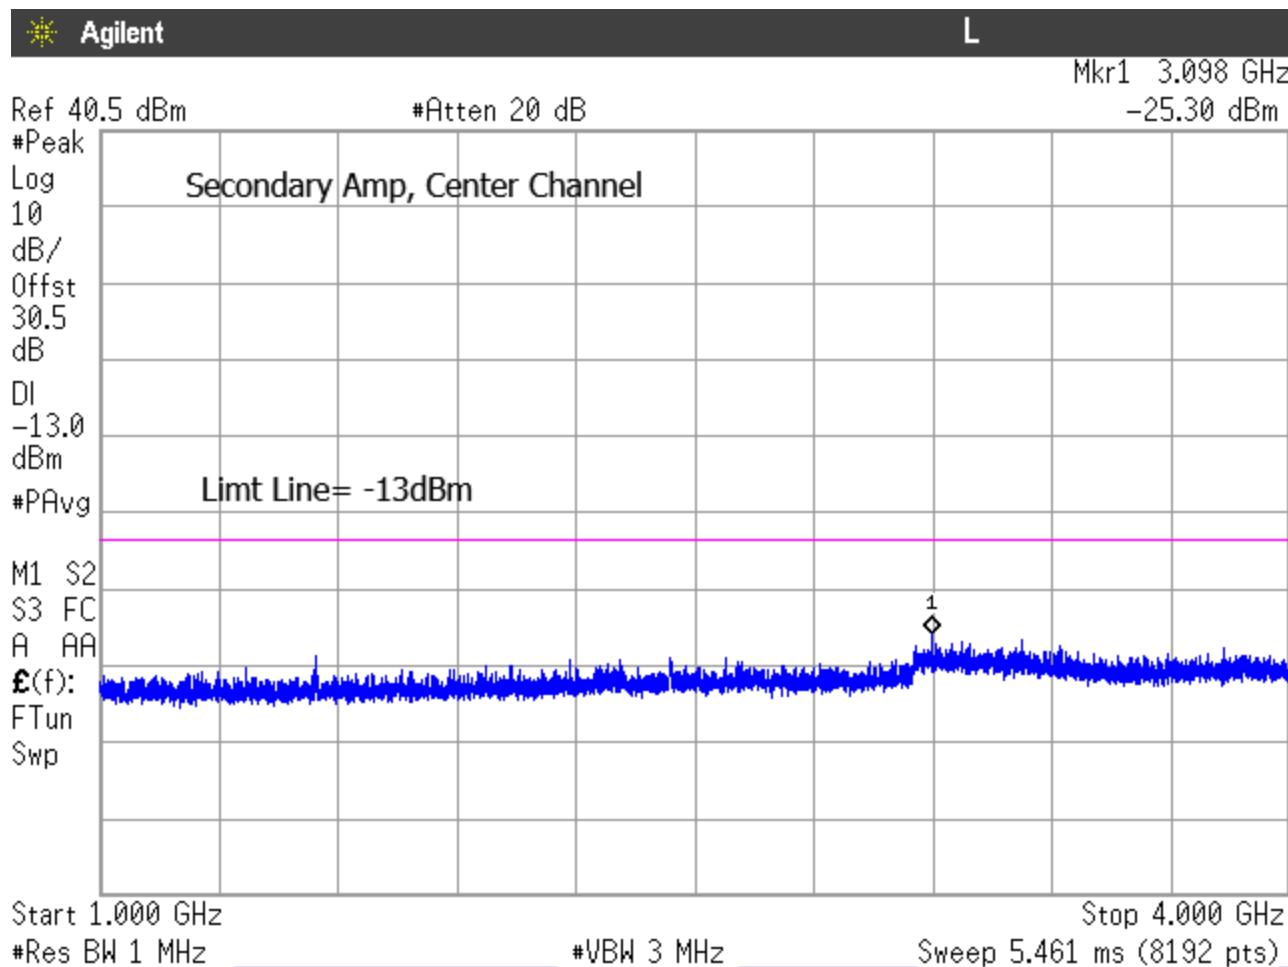


Figure 112: Conducted Spurious 769-775MHz, Secondary Amp, Center Channel 1-4GHz

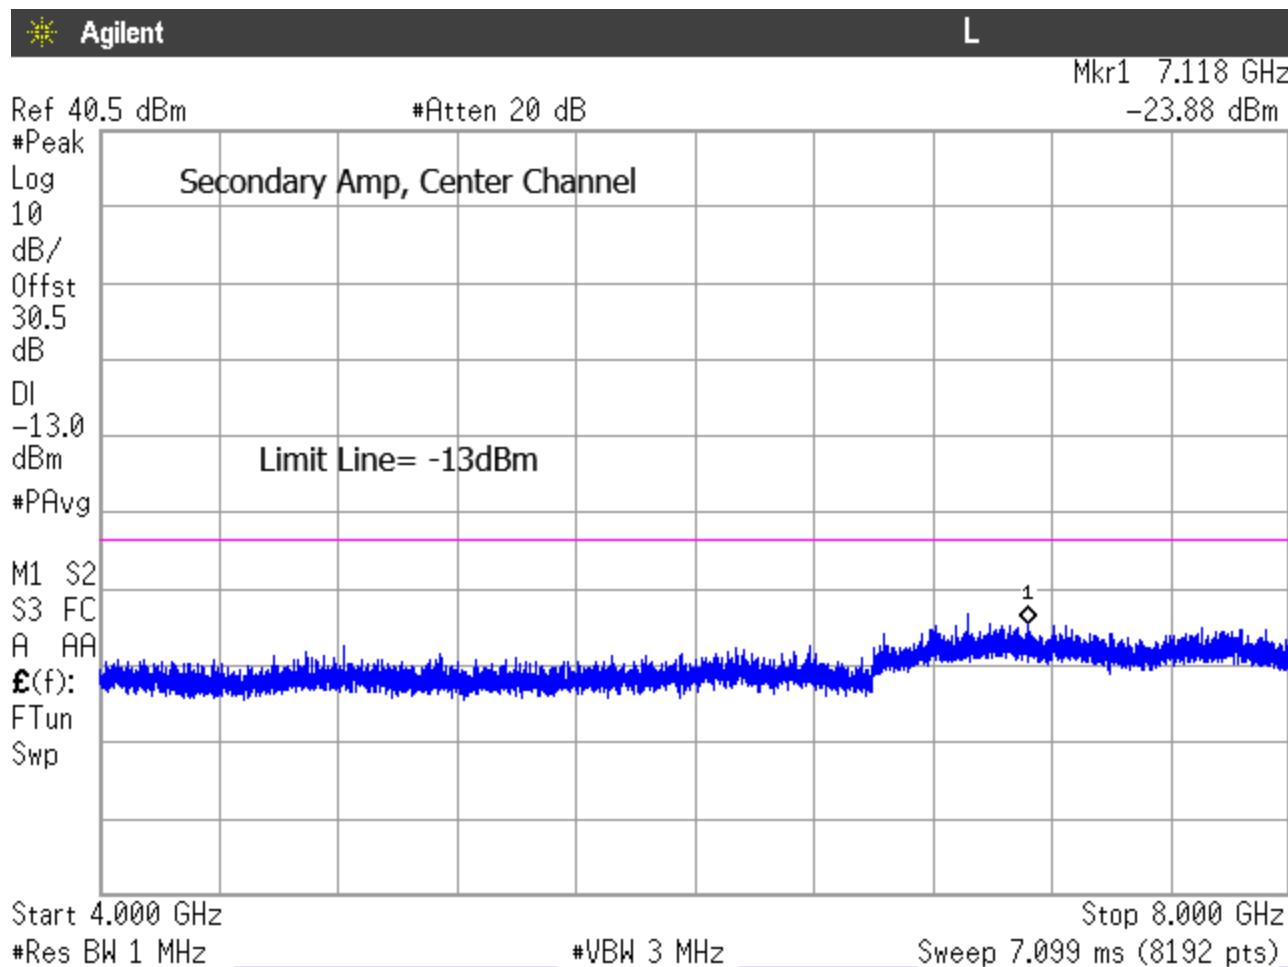


Figure 113: Conducted Spurious 769-775MHz, Secondary Amp, Center Channel 4-8GHz

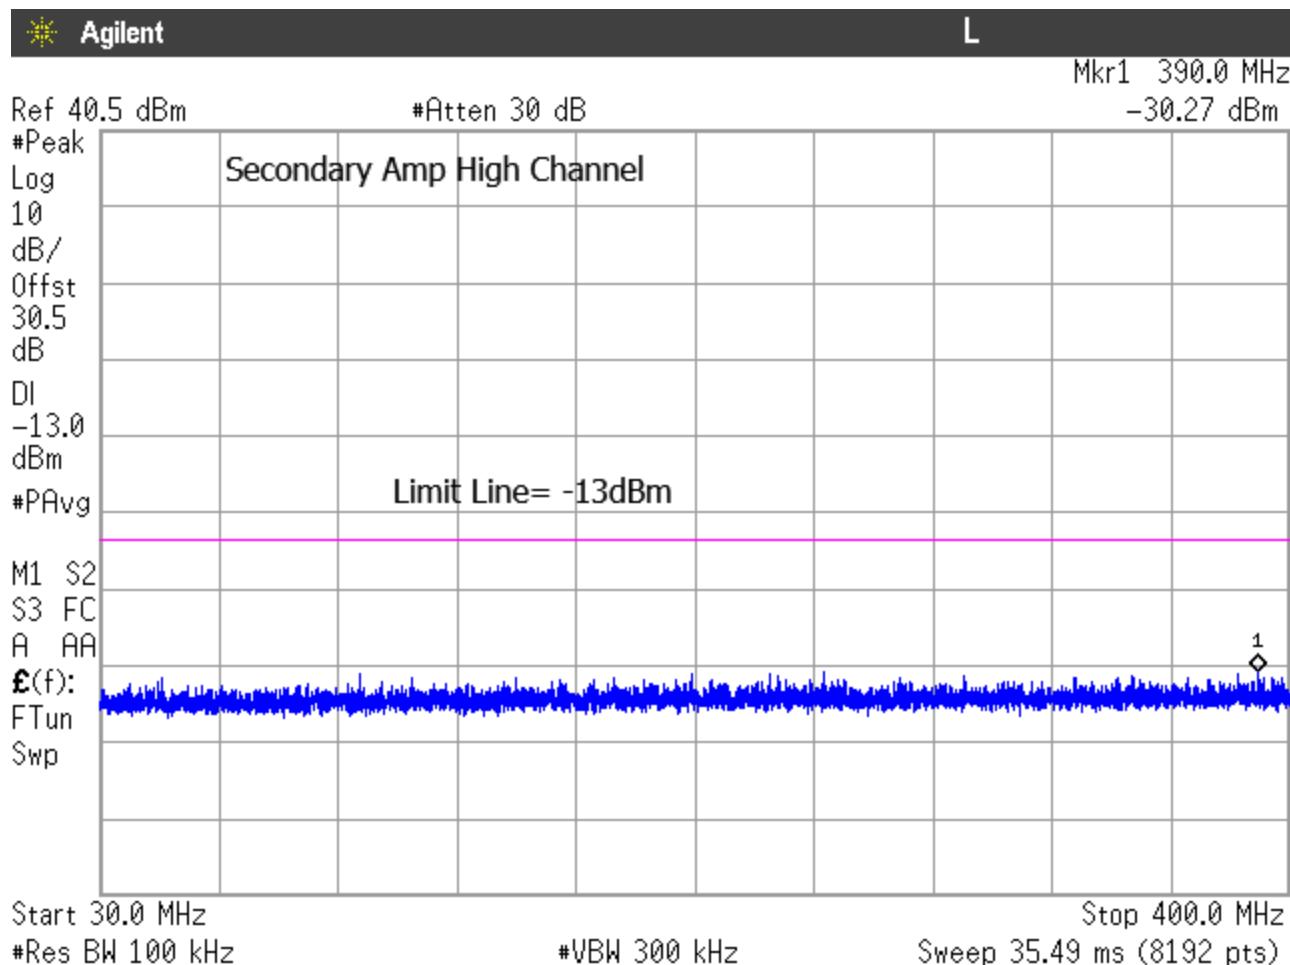


Figure 114: Conducted Spurious 769-775MHz, Secondary Amp, High Channel 30-400MHz

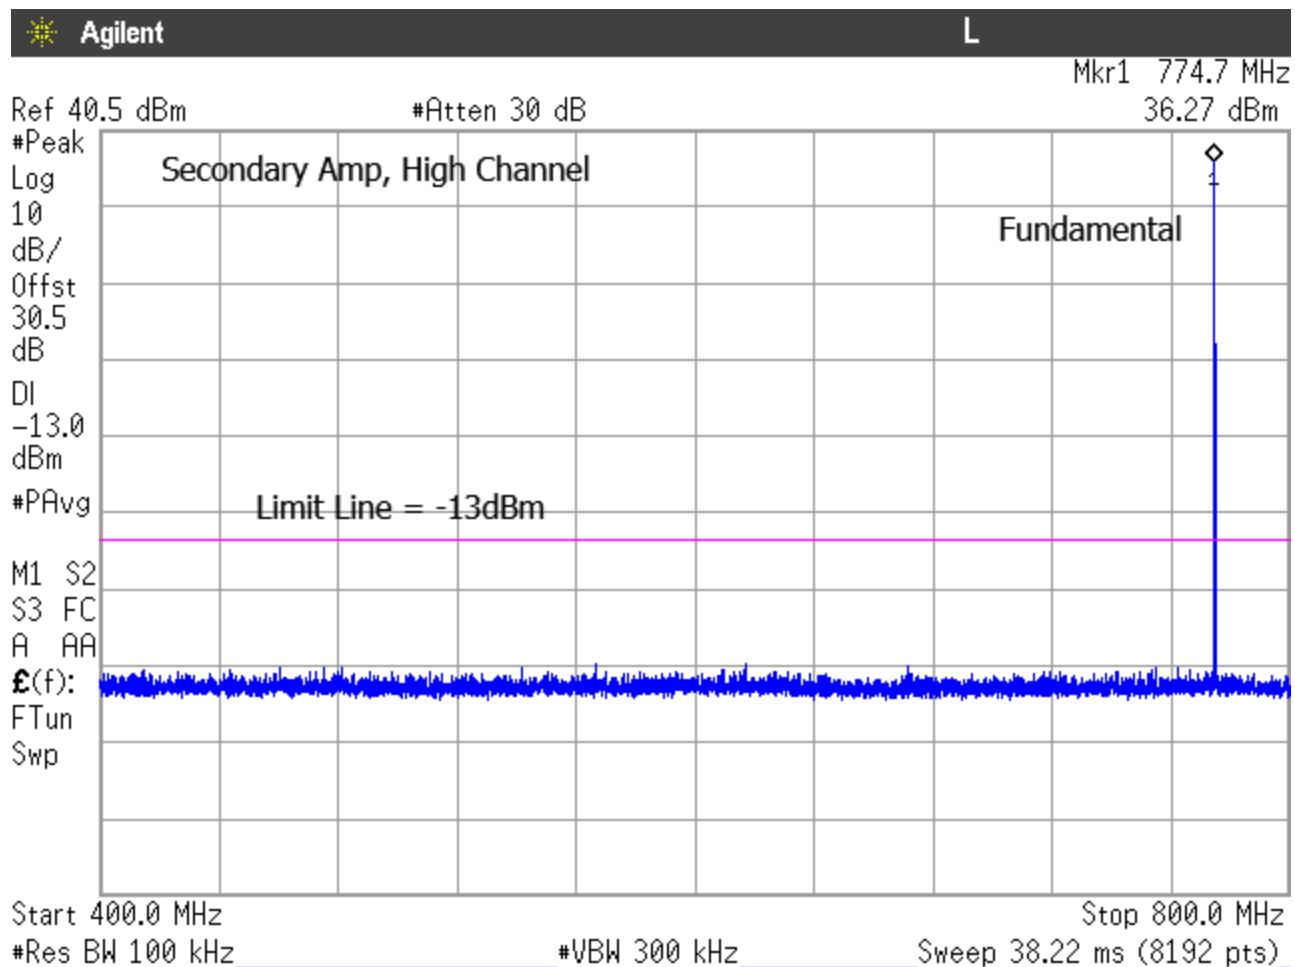


Figure 115: Conducted Spurious 769-775MHz, Secondary Amp, High Channel 400-800MHz

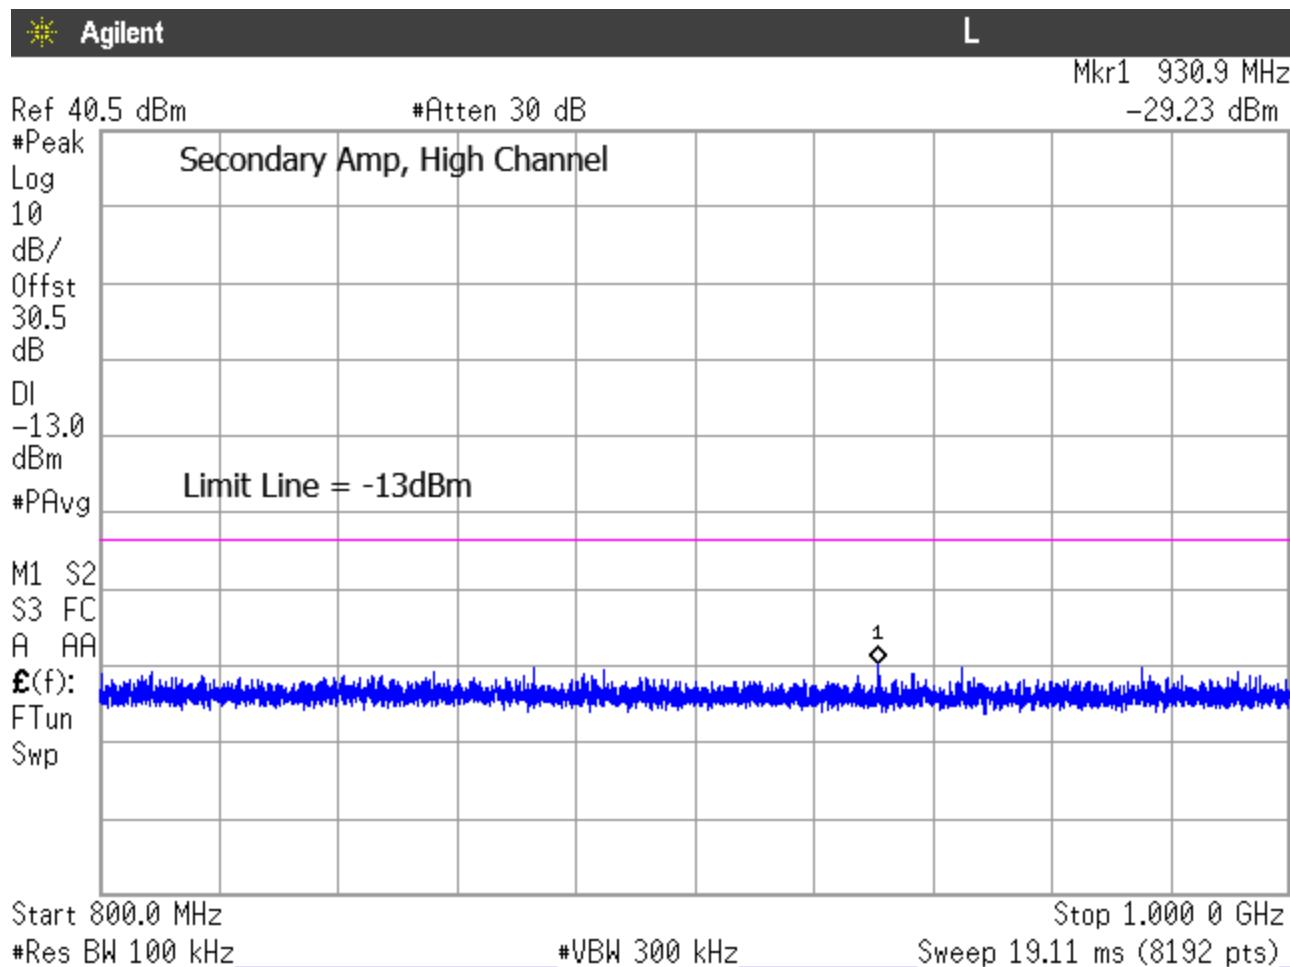


Figure 116: Conducted Spurious 769-775MHz, Secondary Amp, High Channel 800-1000MHz

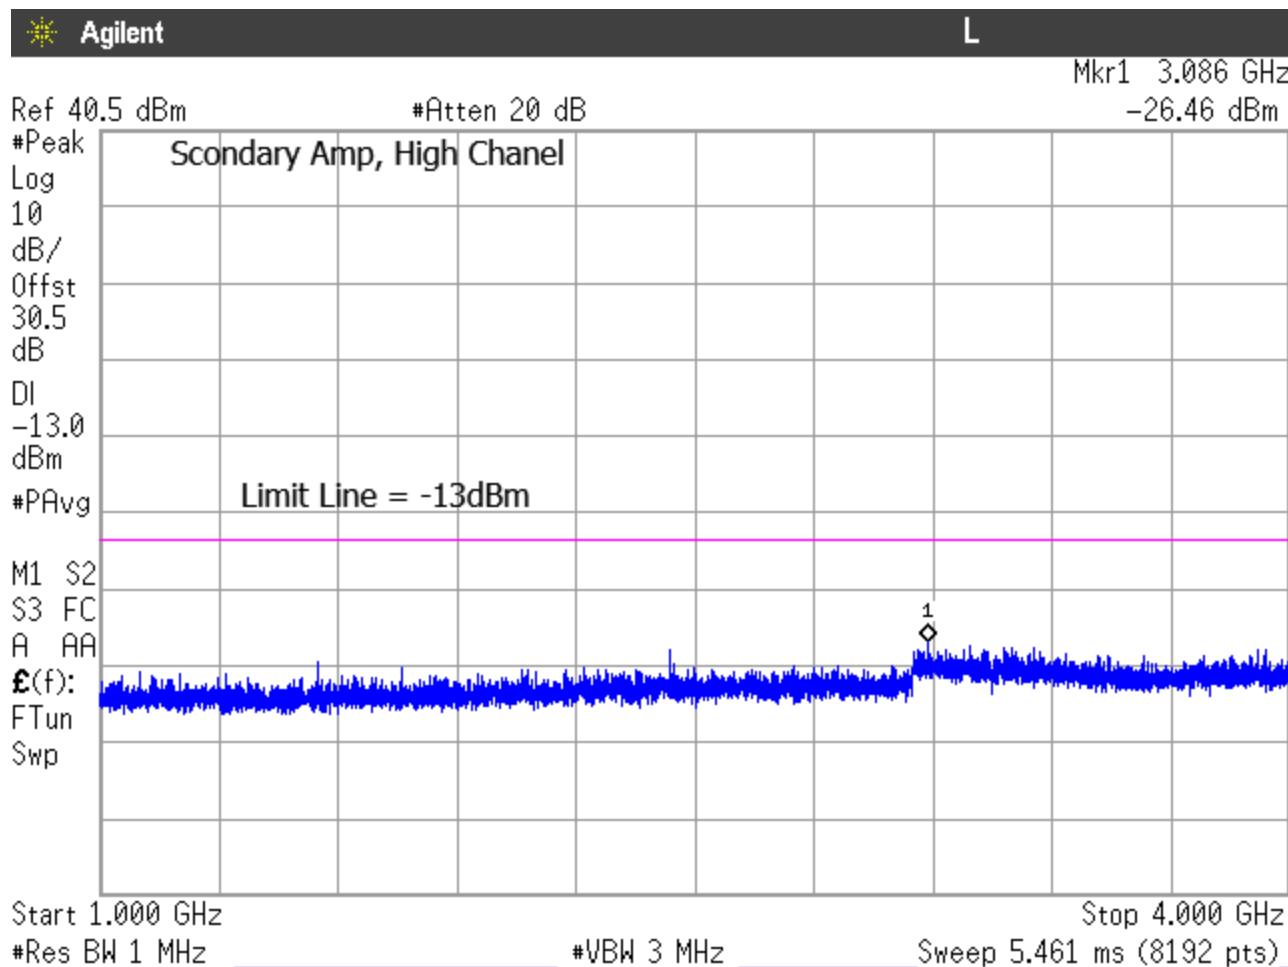


Figure 117: Conducted Spurious 769-775MHz, Secondary Amp, High Channel 1-4GHz

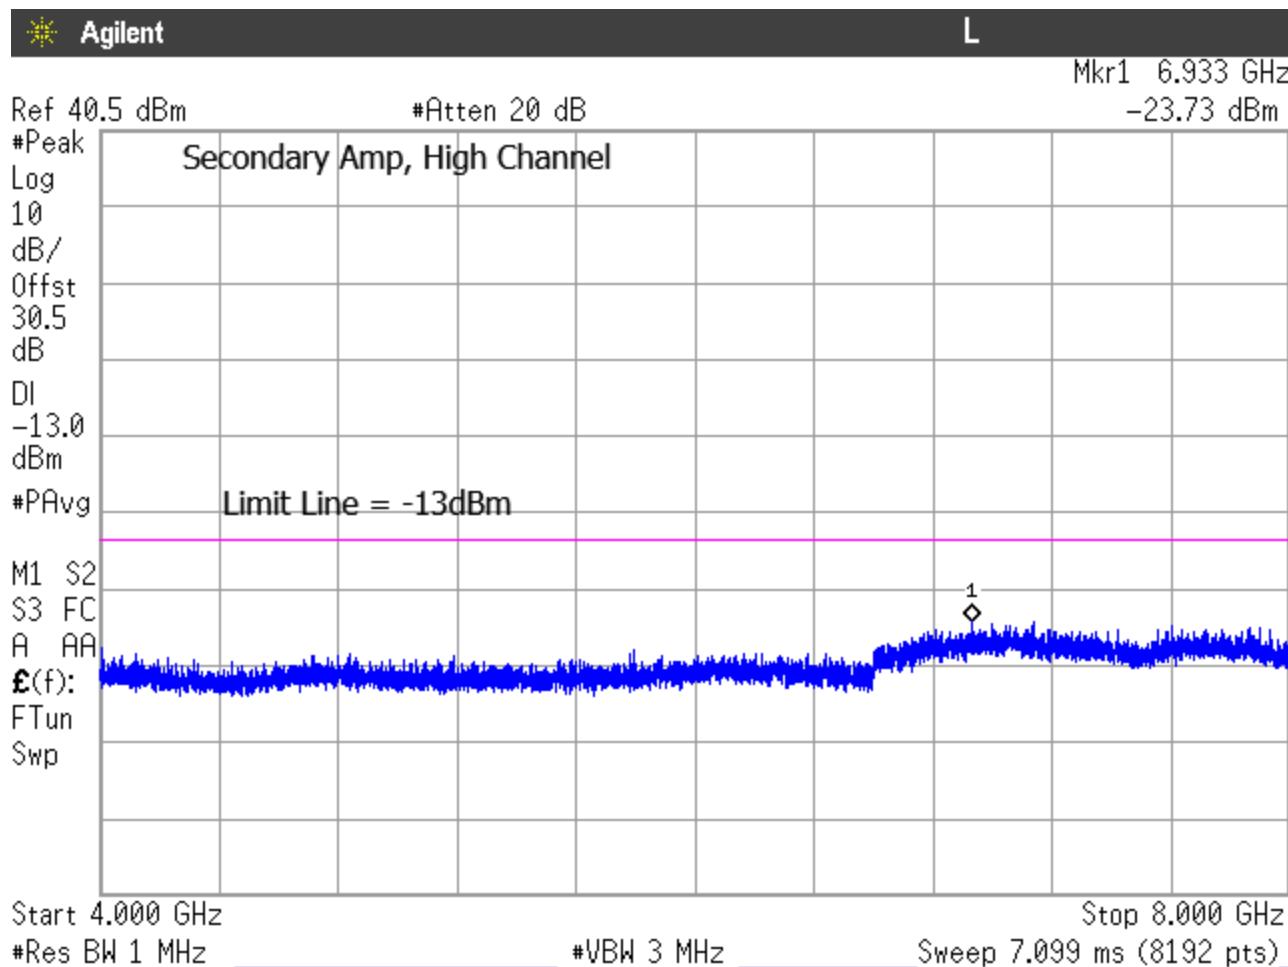


Figure 118: Conducted Spurious 769-775MHz, Secondary Amp, High Channel 4-8GHz

4.7 EUT frequency stability measurements (935210 DO5 section 4.8)

90.219(e)(4)(i) requires that a signal being retransmitted by an amplifier, booster, or repeater meet the frequency stability requirements of 90.213. However, this requirement presumes that the EUT processes an input signal in a manner that can influence the output signal frequency/frequencies (i.e., most signal boosters do not incorporate an oscillator). If this is not the case (i.e., the amplifier, booster, or repeater does not alter the input signal in any way), then a frequency stability test may not be required.

4.7.1 Summary

As this amplifier does not alter or influence the signal and does not include an oscillator, frequency stability tests do not apply.

4.8 EUT spurious emissions radiated measurements (935210 DO5 section 4.9)

4.8.1 Test Method

The EUT was tested out of band (>250 % of authorized bandwidth) for radiated emissions on an open air test site (OATS) using a substitution method. The EUT was placed on motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The EUT was tested in 3 orthogonal positions for compliance. A resolution bandwidth of 100 kHz was used for radiated measurements < 1GHz and a resolution bandwidth of 1MHz for measurements > 1GHz. The EUT antenna port was terminated for these readings. Readings were taken from 30MHz to 9GHz.

The EUT was excited with a CW signal at 771.66875MHz. Levels were set just below the AGC threshold.

4.8.2 Radiate Spurious Summary

The EUT complied with the requirements for radiated emissions per FCC part 90.210 mask C.

Table 10: Radiated Spurious Results

Frequency (MHz)	Polarity	Azimuth	Ant. Height (m)	Spurious Level (dBuV)	Sub. Sig. Gen. Level (dBm)	Sub. Power Level (dBm)	Sub. Ant. Factor (dB)	Sub. Ant. Gain (dB)	EIRP Level (dBm)	Limit (dBm)	Margin (dB)
583.34	V	200.0	1.5	45.4	-39.1	-42.1	19.0	6.5	-35.6	-13	-22.6
625.00	V	225.0	1.3	42.7	-47.1	-50.2	19.2	6.9	-43.3	-13	-30.3
900.00	V	200.0	2.1	35.1	-47.7	-51.4	21.8	7.5	-43.9	-13	-30.9
1000.00	V	225.0	2.4	38.5	-42.6	-46.8	24.1	6.1	-40.7	-13	-27.7
1543.33	V	0.0	2.5	53.8	-46.1	-51.5	25.2	8.8	-42.7	-13	-29.7
2562.60	V	40.0	1.9	51.3	-43.6	-50.7	29.5	8.8	-41.9	-13	-28.9
1050.04	V	170.0	2.5	55.9	-49.9	-54.2	24.3	6.3	-47.9	-13	-34.9
1250.11	V	45.0	2.3	59.5	-47.0	-51.8	25.2	7.0	-44.8	-13	-31.8
1666.51	V	0.0	2.7	64.2	-41.0	-46.6	25.4	9.2	-37.4	-13	-24.4
1499.71	V	0.0	3.5	61.2	-44.0	-49.3	25.2	8.6	-40.7	-13	-27.7
1583.18	V	45.0	3.5	59.6	-45.0	-50.5	25.2	9.0	-41.5	-13	-28.5
1750.00	V	10.0	3.0	60.6	-42.0	-47.8	25.7	9.4	-38.4	-13	-25.4
2000.00	V	0.0	3.0	51.7	-45.0	-51.2	27.9	8.4	-42.9	-13	-29.9
2500.00	V	45.0	3.7	50.9	-43.0	-50.0	29.1	9.0	-41.0	-12	-29.0
3000.00	V	180.0	3.8	51.5	-41.0	-48.8	30.0	9.8	-39.1	-13	-26.1
6000.00	V	190.0	3.4	47.0	-31.0	-43.0	34.6	11.2	-31.8	-13	-18.8
325.00	H	225.0	1.1	52.3	-47.7	-50.1	14.0	6.4	-43.6	-13	-30.6
375.00	H	90.0	1.3	54.1	-45.3	-47.8	15.6	6.1	-41.7	-13	-28.7
425.00	H	45.0	1.2	49.5	-48.4	-51.0	16.9	5.9	-45.1	-13	-32.1
500.00	H	100.0	1.2	48.0	-46.0	-48.7	16.7	7.5	-41.2	-13	-28.2
583.19	H	225.0	1.4	47.3	-46.2	-49.2	19.0	6.5	-42.7	-13	-29.7
625.00	H	45.0	1.3	45.5	-47.2	-50.3	19.2	6.9	-43.4	-13	-30.4
833.36	H	45.0	1.1	48.4	-39.1	-42.7	22.1	6.5	-36.2	-13	-23.2
916.58	H	90.0	1.1	39.3	-45.6	-49.4	22.4	7.1	-42.3	-13	-29.3
1056.00	H	0.0	2.5	62.3	-44.2	-48.5	24.4	6.3	-42.2	-13	-29.2
1250.11	H	360.0	4.0	58.0	-45.9	-50.7	25.2	7.0	-43.7	-13	-30.7
1333.55	H	0.0	2.5	58.2	-45.9	-50.9	25.3	7.4	-43.5	-13	-30.5
1499.71	H	45.0	2.3	61.2	-43.1	-48.4	25.2	8.6	-39.8	-13	-26.8
1583.18	H	0.0	1.7	58.9	-44.1	-49.6	25.2	9.0	-40.6	-13	-27.6
1666.51	H	360.0	3.0	62.9	-41.9	-47.5	25.4	9.2	-38.3	-13	-25.3
1750.00	H	45.0	2.5	57.9	-45.2	-51.0	25.7	9.4	-41.6	-13	-28.6
2000.00	H	270.0	2.0	50.7	-48.5	-54.7	27.9	8.4	-46.4	-13	-33.4
2500.00	H	0.0	3.8	53.5	-41.0	-48.0	29.1	9.0	-39.0	-13	-26.0
2562.60	H	360.0	3.4	50.2	-42.9	-50.0	29.5	8.8	-41.2	-13	-28.2
3000.00	H	260.0	3.8	50.1	-41.0	-48.8	30.0	9.8	-39.1	-13	-26.1
6000.00	H	90.0	3.0	46.0	-27.5	-39.5	34.6	11.2	-28.3	-13	-15.3