

SAR EVALUATION REPORT

For

WOO GLOBAL MARKETS, S.L.

Camino de Vinateros, 10. Bajo (Oficinas) 28030, MADRID, Spain

FCC ID: 2AETN5045GS

Report Type: Revised Report	Product Type: Smart Phone
Prepared By: Terry XiaHou	<i>Terry XiaHou</i>
Report Number: RSZ150918003-20A Rev	
Report Date: 2016-11-09	
Reviewed By: Wilson Chen	<i>Wilson Chen</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Attestation of Test Results		
EUT Information	Company Name	WOO GLOBAL MARKETS, S.L.
	EUT Description	4G Mobile Phone
	FCC ID	2AETN5045GS
	Model Number	5045GS
	Test Date	2016-10-14, 2016-10-15 and 2016-10-16
Frequency	Max. SAR Level(s) Reported	Limit(W/Kg)
GSM 850	0.383 W/kg 1g Head SAR 0.617 W/kg 1g Body SAR	1.6
PCS 1900	0.159 W/kg 1g Head SAR 0.311 W/kg 1g Body SAR	
WCDMA 850	0.176 W/kg 1g Head SAR 0.237 W/kg 1g Body SAR	
WCDMA 1900	0.184 W/kg 1g Head SAR 0.319 W/kg 1g Body SAR	
LTE Band 2	0.207 W/kg 1g Head SAR 0.432 W/kg 1g Body SAR	
LTE Band 4	0.149 W/kg 1g Head SAR 0.264 W/kg 1g Body SAR	
LTE Band 7	0.275 W/kg 1g Head SAR 0.473 W/kg 1g Body SAR	
LTE Band 17	0.199 W/kg 1g Head SAR 0.370 W/kg 1g Body SAR	
Simultaneous	0.748 W/kg 1g Head SAR 0.800 W/kg 1g Body SAR	
Hotspot	0.800 W/kg 1g Body SAR	
Applicable Standards	FCC 47 CFR part 2.1093 Radiofrequency radiation exposure evaluation: portable devices	
	IEEE1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques	
	IEC 62209-2:2010 Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices-Human models, instrumentation, and procedures-Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)	
	KDB procedures KDB 447498 D01 General RF Exposure Guidance v06. KDB 648474 D04 Handset SAR v01r03. KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02 KDB 941225 D01 3G SAR Procedures v03r01 KDB 941225 D05 SAR for LTE Devices v02r03 KDB 941225 D06 Hotspot Mode v02r01	
Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in ANSI/IEEE Standards and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures. The results and statements contained in this report pertain only to the device(s) evaluated.		

Note: for LTE Band 7, please refer to RSZ150918003-20B Rev

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
EUT DESCRIPTION	5
TECHNICAL SPECIFICATION	5
REFERENCE, STANDARDS, AND GUIDELINES	6
SAR LIMITS	7
FACILITIES.....	8
DESCRIPTION OF TEST SYSTEM	9
EQUIPMENT LIST AND CALIBRATION	16
EQUIPMENTS LIST & CALIBRATION INFORMATION	16
SAR MEASUREMENT SYSTEM VERIFICATION	17
LIQUID VERIFICATION	17
SYSTEM ACCURACY VERIFICATION	19
SAR SYSTEM VALIDATION DATA	20
EUT TEST STRATEGY AND METHODOLOGY	36
TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON’S EAR.....	36
CHEEK/TOUCH POSITION	37
EAR/TILT POSITION	37
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS	38
SAR EVALUATION PROCEDURE.....	39
TEST METHODOLOGY	39
CONDUCTED OUTPUT POWER MEASUREMENT	40
PROVISION APPLICABLE	40
TEST PROCEDURE	40
MAXIMUM OUTPUT POWER AMONG PRODUCTION UNITS	46
TEST RESULTS:	47
SAR MEASUREMENT RESULTS	61
SAR TEST DATA.....	61
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION	72
SAR PLOTS.....	77
APPENDIX A MEASUREMENT UNCERTAINTY	153
APPENDIX B – PROBE CALIBRATION CERTIFICATES.....	155
APPENDIX C DIPOLE CALIBRATION CERTIFICATES	164
APPENDIX D EUT TEST POSITION PHOTOS	200
LIQUID DEPTH ≥ 15CM.....	200
BODY-WORN BACK SETUP PHOTO (10MM)	200
BODY-WORN LEFT SETUP PHOTO (10MM)	201
BODY-WORN BOTTOM SETUP PHOTO (10MM)	201
LEFT HEAD TOUCH SETUP PHOTO	202
LEFT HEAD TILT SETUP PHOTO	202
RIGHT HEAD TOUCH SETUP PHOTO	203
RIGHT HEAD TILT SETUP PHOTO	203
APPENDIX E EUT PHOTOS.....	204
APPENDIX F INFORMATIVE REFERENCES	208

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RSZ150918003-20 Rev	Original Report	2015-09-30
1	RSZ150918003-20A Rev	Revised Report	2016-11-09

Note: for LTE Band 7, please refer to RSZ150918003-20B Rev

EUT DESCRIPTION

This report has been prepared on behalf of WOO GLOBAL MARKETS, S.L. and their product, FCC ID: 2AETN5045GS, Model: 5045GS or the EUT (Equipment under Test) as referred to in the rest of this report.

Technical Specification

Product Type	Portable
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Internal Antenna
Body-Worn Accessories:	Headset
Face-Head Accessories:	None
Multi-slot Class:	Class 12
Operation Mode :	GSM Voice, EGPRS/GPRS Data, WCDMA(Rel99, HSUPA, HSDPA, HSPA+),LTE, Wi-Fi and Bluetooth
Frequency Band:	GSM 850 : 824-849 MHz(TX) ; 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX) ; 1930-1990 MHz(RX) WCDMA 850: 824-849 MHz(TX) ; 869-894 MHz(RX) WCDMA 1900: 1850-1910 MHz(TX) ; 1930-1990 MHz(RX) LTE Band 2: 1850-1910MHz(TX) ; 1930-1990MHz(RX) LTE Band 4: 1710-1755MHz(TX) ; 2110-2155MHz(RX) LTE Band 7: 2500-2570MHz(TX) ; 2620-2690MHz(RX) LTE Band 17: 704-716MHz(TX) ;734-746MHz(RX) Wi-Fi(802.11b/g/n20): 2412 MHz-2462 MHz Wi-Fi(802.11n40): 2422 MHz-2452 MHz Bluetooth3.0 : 2402 MHz-2480 MHz BLE:2402 MHz-2480 MHz
Conducted RF Power:	GSM 850 : 32.67 dBm PCS 1900: 29.46 dBm WCDMA 850: 22.34 dBm WCDMA 1900: 22.59 dBm LTE Band 2: 22.32 dBm LTE Band 4: 21.48 dBm LTE Band 7: 22.04 dBm LTE Band 17: 21.96 dBm Wi-Fi: 9.38 dBm Bluetooth3.0: 4.45 dBm BLE: -2.07 dBm
Dimensions (L*W*H):	142mm (L) × 71 mm (W) × 8 mm (H)
Power Source:	3.7 V _{DC} Rechargeable Battery
Normal Operation:	Head and Body-worn

Note: For the data of LTE Band 7, please refer to the RSZ150918003-20B Rev.

REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For portable devices, the RF radiation exposure evaluation requirement was provided in part 2.1093. According to KDB447498 D01 “General RF Exposure Guidance”, the device should be evaluated at maximum output power (radiated from the antenna) under “worst-case” conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices.

CE:

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For portable devices, the limitation of exposure of the general public to electromagnetic fields was recommended on Council Recommendation 1999/519/EC. According to the Standard IEC62209-1/2, the device should be evaluated at maximum output power (radiated from the antenna) under “worst-case” conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body portable devices.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

SAR Limits

FCC Limit (1g Tissue)

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

CE Limit (10g Tissue)

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 10 g of tissue)	2.0	10
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

FACILITIES

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect data is located at 6/F, the 3rd Phase of WanLi Industrial Building, Shi Hua Road, Fu Tian Free Trade Zone, Shenzhen, Guangdong, P.R. of China

DESCRIPTION OF TEST SYSTEM

These measurements were performed with ALSAS 10 Universal Integrated SAR Measurement system from APREL Laboratories.

ALSAS-10U System Description

ALSAS-10-U is fully compliant with the technical and scientific requirements of IEEE 1528, IEC 62209, CENELEC, ARIB, ACA, and the Federal Communications Commission. The system comprises of a six axes articulated robot which utilizes a dedicated controller.

ALSAS-10U uses the latest methodologies. And FDTD modeling to provide a platform which is repeatable with minimum uncertainty.

Applications

Predefined measurement procedures compliant with the guidelines of CENELEC, IEEE, IEC, FCC, etc are utilized during the assessment for the device. Automatic detection for all SAR maxima are embedded within the core architecture for the system, ensuring that peak locations used for centering the zoom scan are within a 1mm resolution and a 0.05mm repeatable position. System operation range currently available up-to 6 GHz in simulated tissue.

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm² step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the ALSAS-10U software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 5x5x8 (8mmx8mmx5mm) providing a volume of 32mm³ in the X & Y axis, and 35mm in the Z axis.



ALSAS-10U Interpolation and Extrapolation Uncertainty


The overall uncertainty for the methodology and algorithms the used during the SAR calculation was evaluated using the data from IEEE 1528 based on the example f3 algorithm:

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \cdot \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

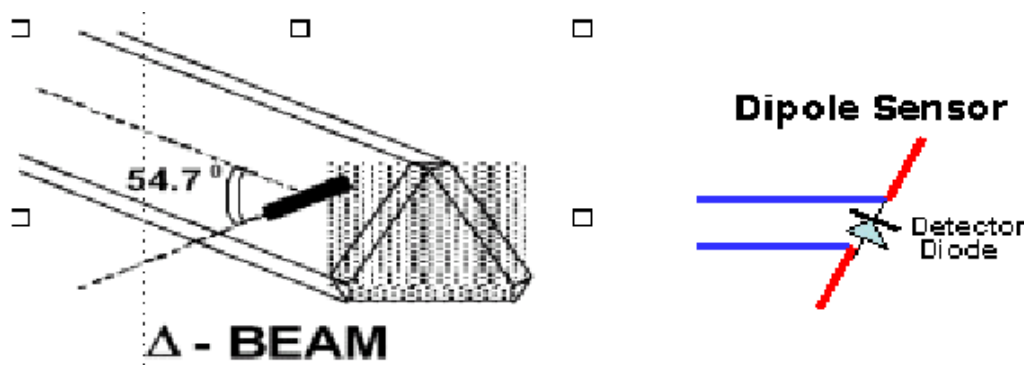

SAR is assessed with a calibrated probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (in the Z Axis). The 5mm offset height has been selected so as to minimize any resultant boundary effect due to the probe being in close proximity to the phantom surface.

The following algorithm is an example of the function used by the system for linearization of the output from the probe when measuring complex modulation schemes.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Isotropic E-Field Probe Specification

Calibration Method	Frequency Dependent Below 1 GHz Calibration in air performed in a TEM Cell Above 1 GHz Calibration in air performed in waveguide
Sensitivity	0.70 $\mu\text{V}/(\text{V}/\text{m})^2$ to 0.85 $\mu\text{V}/(\text{V}/\text{m})^2$
Dynamic Range	0.0005 W/kg to 100 W/kg
Isotropic Response	Better than 0.1 dB
Diode Compression Point (DCP)	Calibration for Specific Frequency
Probe Tip Diameter	< 2.9 mm
Sensor Offset	1.56 (+/- 0.02 mm)
Probe Length	289 mm
Video Bandwidth	@ 500 Hz: 1 dB @ 1.02 kHz: 3 dB
Boundary Effect	Less than 2.1% for distance greater than 0.58 mm
Spatial Resolution	The spatial resolution uncertainty is less than 1.5% for 4.9mm diameter probe. The spatial resolution uncertainty is less than 1.0% for 2.5mm diameter probe

Boundary Detection Unit and Probe Mounting Device

ALSAS-10U incorporates a boundary detection unit with a sensitivity of 0.05mm for detecting all types of surfaces. The robust design allows for detection during probe tilt (probe normalize) exercises, and utilizes a second stage emergency stop. The signal electronics are fed directly into the robot controller for high accuracy surface detection in lateral and axial detection modes (X, Y, & Z).

The probe is mounted directly onto the Boundary Detection unit for accurate tooling and displacement calculations controlled by the robot kinematics. The probe is connect to an isolated probe interconnect where the output stage of the probe is fed directly into the amplifier stage of the Daq-Paq.

Daq-Paq (Analog to Digital Electronics)

ALSAS-10U incorporates a fully calibrated Daq-Paq (analog to digital conversion system) which has a 4 channel input stage, sent via a 2 stage auto-set amplifier module. The input signal is amplified accordingly so as to offer a dynamic range from 5 μV to 800mV. Integration of the fields measured is carried out at board level utilizing a Co-Processor which then sends the measured fields down into the main computational module in digitized form via an RS232 communications port. Probe linearity and duty cycle compensation is carried out within the main Daq-Paq module.

ADC	12 Bit
Amplifier Range	20 mV to 200 mV and 150 mV to 800 mV
Field Integration	Local Co-Processor utilizing proprietary integration algorithms
Number of Input Channels	4 in total 3 dedicated and 1 spare
Communication	Packet data via RS232

Axis Articulated Robot

ALSAS-10U utilizes a six axis articulated robot, which is controlled using a Pentium based real-time movement controller. The movement kinematics engine utilizes proprietary (Thermo CRS) interpolation and extrapolation algorithms, which allow full freedom of movement for each of the six joints within the working envelope. Utilization of joint 6 allows for full probe rotation with a tolerance better than 0.05mm around the central axis.



Robot/Controller Manufacturer	Thermo CRS
Number of Axis	Six independently controlled axis
Positioning Repeatability	0.05 mm
Controller Type	Single phase Pentium based C500C
Robot Reach	710 mm
Communication	RS232 and LAN compatible

ALSAS Universal Workstation

ALSAS Universal workstation allows for repeatability and fast adaptability. It allows users to do calibration, testing and measurements using different types of phantoms with one set up, which significantly speeds up the measurement process.

Universal Device Positioner

The universal device positioner allows complete freedom of movement of the EUT. Developed to hold a EUT in a free-space scenario any additional loading attributable to the material used in the construction of the positioner has been eliminated. Repeatability has been enhanced through the linear scales which form the design used to indicate positioning for any given test scenario in all major axes. A 15° tilt indicator is included for the of aid cheek to tilt movements for head SAR analysis. Overall uncertainty for measurements have been reduced due to the design of the Universal device positioner, which allows positioning of a device in as near to a free-space scenario as possible, and by providing the means for complete repeatability.



Phantom Types

The ALSAS-10U allows the integration of multiple phantom types. SAM Phantoms fully compliant with IEEE 1528, Universal Phantom, and Universal Flat.

APREL SAM Phantoms

The SAM phantoms developed using the IEEE SAM CAD file. They are fully compliant with the requirements for both IEEE 1528 and FCC Supplement C. Both the left and right SAM phantoms are interchangeable, transparent and include the IEEE 1528 grid with visible NF and MB lines.



APREL Laboratories Universal Phantom

The Universal Phantom is used on the ALSAS-10U as a system validation phantom. The Universal Phantom has been fully validated both experimentally from 800MHz to 6GHz and numerically using XFDTD numerical software.

The shell thickness is 2mm overall, with a 4mm spacer located at the NF/MB intersection providing an overall thickness of 6mm in line with the requirements of IEEE-1528.

The design allows for fast and accurate measurements, of handsets, by allowing the conservative SAR to be evaluated at on frequency for both left and right head experiments in one measurement.



Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton x-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (s/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Recommended Tissue Dielectric Parameters for Head and Body

Frequency (MHz)	Head Tissue		Body Tissue	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00


EQUIPMENT LIST AND CALIBRATION

Equipments List & Calibration Information

Equipment	Model	Calibration Date	Calibration Due Date	S/N
CRS F3 robot	ALS-F3	N/A	N/A	RAF0805352
CRS F3 Software	ALS-F3-SW	N/A	N/A	N/A
CRS C500C controller	ALS-C500	N/A	N/A	RCF0805379
Probe mounting device & Boundary Detection Sensor System	ALS-PMDPS-3	N/A	N/A	120-00270
Universal Work Station	ALS-UWS	N/A	N/A	100-00157
Data Acquisition Package	ALS-DAQ-PAQ-3	2015-12-14	2016-12-14	110-00212
Miniature E-Field Probe	ALS-E-020	2015-12-14	2016-12-14	500-00283
Dipole, 750MHz	ALS-D-750-S-2	2013-10-08	2017-10-08	177-00505
Dipole, 835MHz	ALS-D-835-S-2	2014-10-08	2017-10-08	180-00558
Dipole, 1750MHz	ALS-D-1750-S-2	2013-10-08	2016-10-08	198-00304
Dipole, 1900MHz	ALS-D-1900-S-2	2014-10-09	2017-10-09	210-00710
Dipole Spacer	ALS-DS-U	N/A	N/A	250-00907
Device holder/Positioner	ALS-H-E-SET-2	N/A	N/A	170-00510
Left ear SAM phantom	ALS-P-SAM-L	N/A	N/A	130-00311
Right ear SAM phantom	ALS-P-SAM-R	N/A	N/A	140-00359
UniPhantom	ALS-P-UP-1	N/A	N/A	150-00413
Simulated Tissue 750 MHz Head	ALS-TS-750-H	Each Time	/	269-01008
Simulated Tissue 750 MHz Body	ALS-TS-750-B	Each Time	/	269-02107
Simulated Tissue 835 MHz Head	ALS-TS-835-H	Each Time	/	270-01002
Simulated Tissue 835 MHz Body	ALS-TS-835-B	Each Time	/	270-02101
Simulated Tissue 1750 MHz Head	ALS-TS-1750-H	Each Time	/	295-01103
Simulated Tissue 1750 MHz Body	ALS-TS-1750-B	Each Time	/	295-02102
Simulated Tissue 1900 MHz Head	ALS-TS-1900-H	Each Time	/	295-01103
Simulated Tissue 1900 MHz Body	ALS-TS-1900-B	Each Time	/	295-02102
Power Amplifier	5S1G4	N/A	N/A	71377
Directional couple	DC6180A	N/A	N/A	0325849
Attenuator	3dB	N/A	N/A	5402
Network analyzer	8752C	2016-06-03	2017-06-03	3410A02356
Dielectric probe kit	HP85070B	2016-06-13	2017-06-13	US33020324
Synthesized Sweeper	HP 8341B	2016-06-03	2017-06-03	2624A00116
UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	2015-11-23	2016-11-23	106891
WIDEBAND RADIO COMMUNICATION TESTER	CMW500	2016-04-19	2017-04-19	114772
EMI Test Receiver	ESCI	2016-06-13	2017-06-13	101746

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

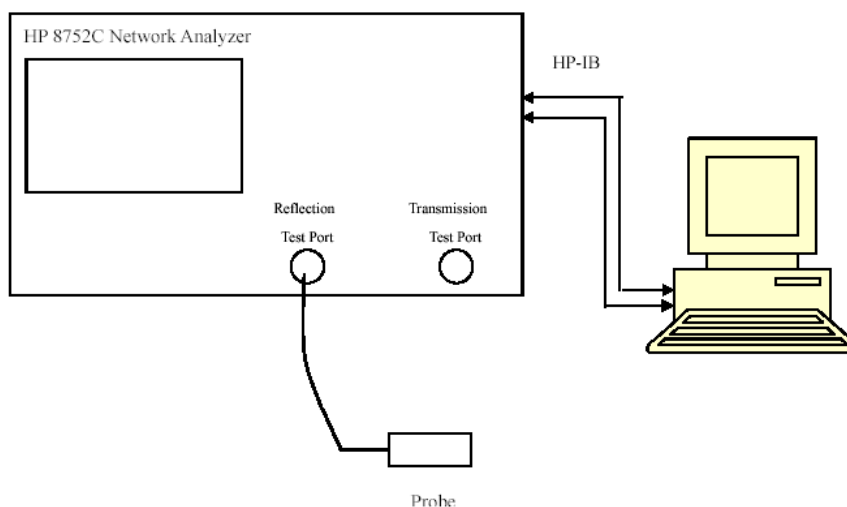

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
709.0	Head	41.12	0.85	41.95	0.89	-1.979	-4.494	± 5
	Body	54.02	0.92	55.50	0.96	-2.667	-4.167	± 5
710.0	Head	41.15	0.86	41.95	0.89	-1.907	-3.371	± 5
	Body	54.07	0.93	55.50	0.96	-2.577	-3.125	± 5
711.0	Head	41.23	0.87	41.95	0.89	-1.716	-2.247	± 5
	Body	54.12	0.94	55.50	0.96	-2.486	-2.083	± 5

*Liquid Verification was performed on 2016-10-14 and 2016-10-15.

Frequency	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
824.2	Head	40.33	0.86	41.56	0.90	-2.960	-4.444	± 5
	Body	54.18	0.95	55.24	0.97	-1.919	-2.062	± 5
826.4	Head	40.38	0.87	41.54	0.90	-2.792	-3.333	± 5
	Body	54.27	0.96	55.23	0.97	-1.738	-1.031	± 5
836.6	Head	40.45	0.88	41.50	0.90	-2.530	-2.222	± 5
	Body	54.32	0.97	55.20	0.97	-1.594	0.000	± 5
846.6	Head	40.52	0.89	41.50	0.91	-2.361	-2.198	± 5
	Body	54.47	0.98	55.20	0.98	-1.322	0.000	± 5
848.8	Head	40.68	0.90	41.50	0.91	-1.976	-1.099	± 5
	Body	54.53	0.99	55.20	0.98	-1.214	1.020	± 5

*Liquid Verification was performed on 2016-10-14 and 2016-10-15.

Frequency	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1850.2	Head	39.87	1.35	40.00	1.40	-0.325	-3.571	± 5
	Body	52.39	1.47	53.30	1.52	-1.707	-3.289	± 5
1852.4	Head	39.89	1.36	40.00	1.40	-0.275	-2.857	± 5
	Body	52.42	1.48	53.30	1.52	-1.651	-2.632	± 5
1860.0	Head	39.93	1.37	40.00	1.40	-0.175	-2.143	± 5
	Body	52.57	1.49	53.30	1.52	-1.370	-1.974	± 5
1880.0	Head	39.97	1.38	40.00	1.40	-0.075	-1.429	± 5
	Body	52.69	1.50	53.30	1.52	-1.144	-1.316	± 5
1900.0	Head	39.99	1.39	40.00	1.40	-0.025	-0.714	± 5
	Body	52.78	1.51	53.30	1.52	-0.976	-0.658	± 5
1907.6	Head	40.12	1.40	40.00	1.40	0.300	0.000	± 5
	Body	52.89	1.52	53.30	1.52	-0.769	0.000	± 5
1909.8	Head	40.18	1.41	40.00	1.40	0.450	0.714	± 5
	Body	52.99	1.53	53.30	1.52	-0.582	0.658	± 5

*Liquid Verification was performed on 2016-10-14 and 2016-10-15.


Frequency	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1720.0	Head	39.63	1.32	40.08	1.37	-1.123	-3.650	± 5
	Body	52.66	1.44	53.44	1.49	-1.460	-3.356	± 5
1732.5	Head	39.65	1.33	40.07	1.37	-1.048	-2.920	± 5
	Body	52.69	1.45	53.42	1.49	-1.367	-2.685	± 5
1745.0	Head	39.74	1.34	40.06	1.38	-0.799	-2.899	± 5
	Body	52.79	1.46	53.39	1.50	-1.124	-2.667	± 5

*Liquid Verification was performed on 2016-10-16

System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

System Verification Setup Block Diagram

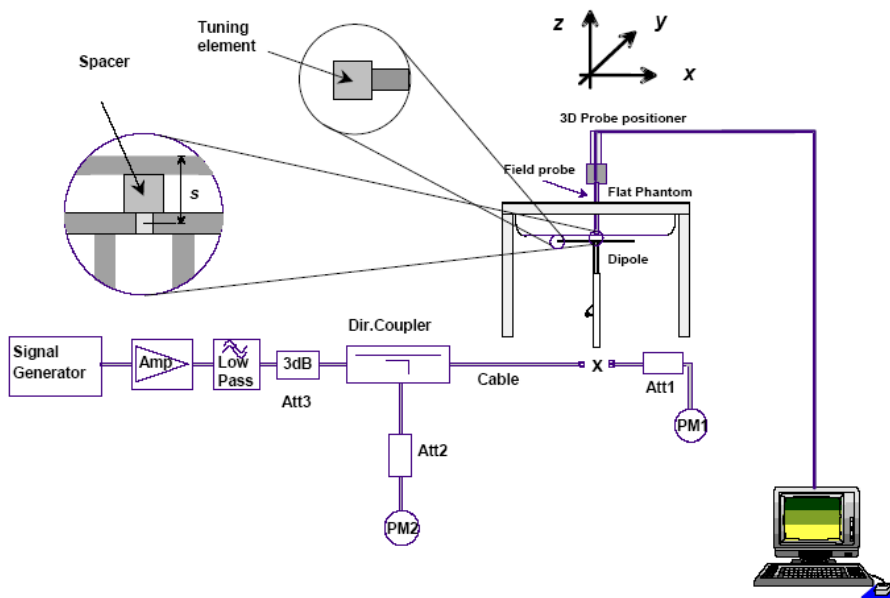

System Accuracy Check Results

Date	Frequency Band	Liquid Type	Measured SAR (W/Kg)		Target Value (W/Kg)	Delta (%)	Tolerance (%)
2016-10-14	750	Head	1g	8.755	8.5	3.000	± 10
	835	Head	1g	9.852	9.773	0.808	± 10
	1900	Head	1g	39.595	39.481	0.289	± 10
2016-10-15	750	Body	1g	8.672	8.54	1.546	± 10
	835	Body	1g	9.899	9.736	1.674	± 10
	1900	Body	1g	39.972	39.715	0.647	± 10
2016-10-16	1750	Head	1g	37.529	37.02	1.375	± 10
		Body	1g	36.295	36.65	-0.969	± 10

*All SAR values are normalized to 1 Watt forward power.

SAR SYSTEM VALIDATION DATA**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****System Performance Check 750 MHz Head Liquid****Dipole 750 MHz; Type: ALS-D-750-S-2; S/N: 177-00505**

Product Data

Device Name : Dipole 750 MHz
Serial No. : 177-00505
Type : Dipole
Model : ALS-D-750-S-2
Frequency Band : 750
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 7.223 W/kg
Power Drift-Finish : 7.269 W/kg
Power Drift (%) : 0.637

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default
Phantom Data

Tissue Data

Type : Head
Serial No. : 269-01008
Frequency : 750.0 MHz
Last Calib. Date : 14-Oct-2016
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 42.08 F/m
Sigma : 0.90 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Dec-2015
Frequency Band : 750
Duty Cycle Factor : 1
Conversion Factor : 6.0
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 21.00 °C
Ambient Temp. : 21.00 °C
Area Scan : 8x13x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 8.755 W/kg
10 gram SAR value : 5.892 W/kg
Area Scan Peak SAR : 11.077 W/kg
Zoom Scan Peak SAR : 14.378 W/kg

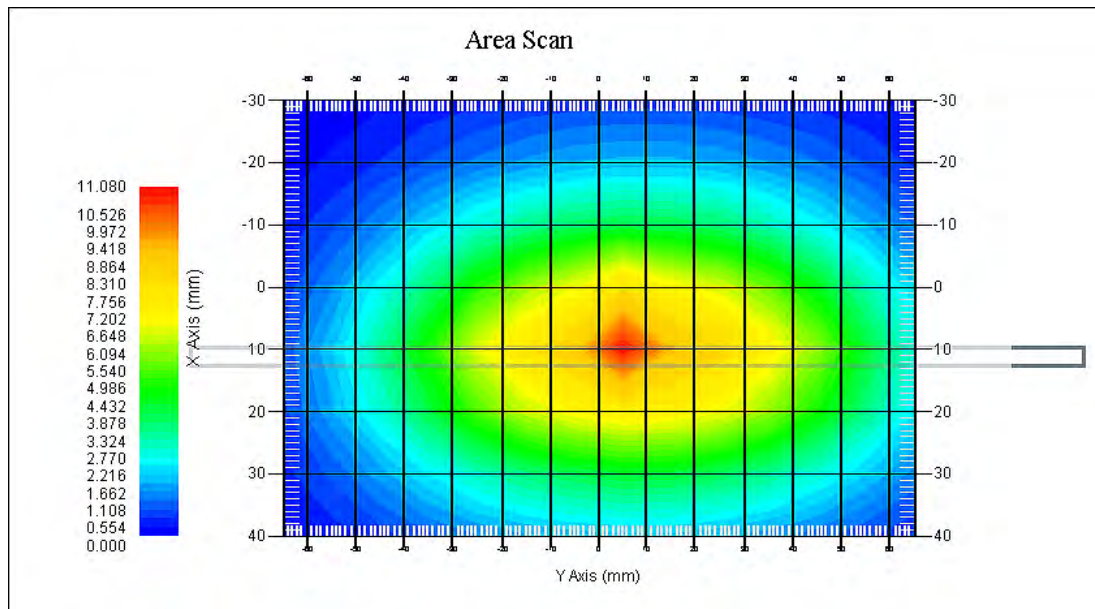

750 MHz System Validation with Head Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 750 MHz Body Liquid****Dipole 750 MHz; Type: ALS-D-750-S-2; S/N: 177-00505**

Product Data

Device Name : Dipole 750 MHz
Serial No. : 177-00505
Type : Dipole
Model : ALS-D-750-S-2
Frequency Band : 750
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 7.532 W/kg
Power Drift-Finish : 7.239 W/kg
Power Drift (%) : -3.890

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default
Phantom Data

Tissue Data

Type : Body
Serial No. : 269-02107
Frequency : 750.0 MHz
Last Calib. Date : 15-Oct-2016
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 54.29 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Dec-2015
Frequency Band : 750
Duty Cycle Factor : 1
Conversion Factor : 5.5
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 21.00 °C
Ambient Temp. : 21.00 °C
Area Scan : 8x13x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 8.672 W/kg
10 gram SAR value : 5.729 W/kg
Area Scan Peak SAR : 12.719 W/kg
Zoom Scan Peak SAR : 15.294 W/kg

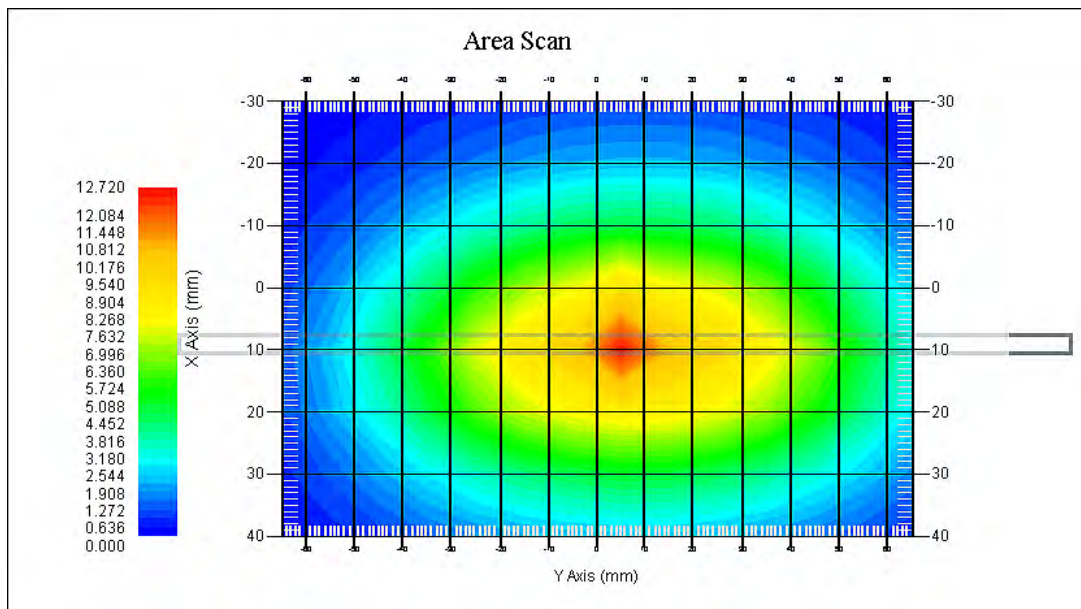

750 MHz System Validation with Body Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 835 MHz Head Liquid****Dipole 835 MHz; Type: ALS-D-835-S-2; S/N: 180-00558**

Product Data

Device Name : Dipole 835 MHz
Serial No. : 180-00558
Type : Dipole
Model : ALS-D-835-S-2
Frequency Band : 835
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 8.382 W/kg
Power Drift-Finish : 8.497 W/kg
Power Drift (%) : 1.372

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default
Phantom Data

Tissue Data

Type : Head
Serial No. : 270-01002
Frequency : 835.0 MHz
Last Calib. Date : 14-Oct-2016
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 40.45 F/m
Sigma : 0.90 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Dec-2015
Frequency Band : 835
Duty Cycle Factor : 1
Conversion Factor : 5.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 21.00 °C
Ambient Temp. : 21.00 °C
Area Scan : 8x14x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 9.852 W/kg
10 gram SAR value : 6.239 W/kg
Area Scan Peak SAR : 11.037 W/kg
Zoom Scan Peak SAR : 16.787 W/kg

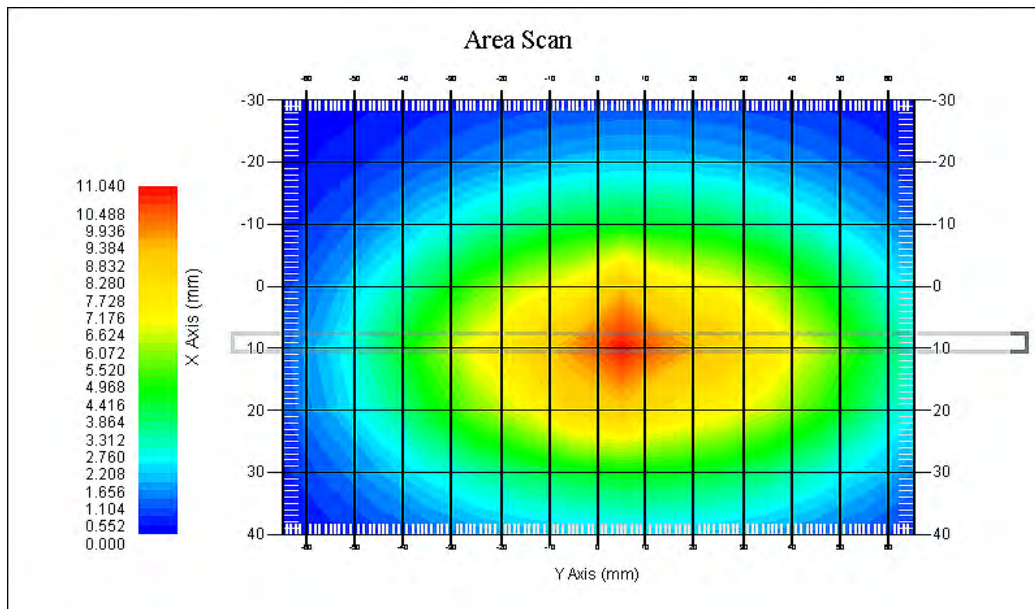

835 MHz System Validation with Head Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 835 MHz Body Liquid****Dipole 835 MHz; Type: ALS-D-835-S-2; S/N: 180-00558**

Product Data

Device Name : Dipole 835 MHz
Serial No. : 180-00558
Type : Dipole
Model : ALS-D-835-S-2
Frequency Band : 835
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 8.775 W/kg
Power Drift-Finish : 8.529 W/kg
Power Drift (%) : -2.803

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default
Phantom Data

Tissue Data

Type : Body
Serial No. : 270-02101
Frequency : 835.0 MHz
Last Calib. Date : 15-Oct-2016
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 54.29 F/m
Sigma : 0.97 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Dec-2015
Frequency Band : 835
Duty Cycle Factor : 1
Conversion Factor : 5.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 21.00 °C
Ambient Temp. : 21.00 °C
Area Scan : 8x14x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 9.899 W/kg
10 gram SAR value : 6.175 W/kg
Area Scan Peak SAR : 11.920 W/kg
Zoom Scan Peak SAR : 16.239 W/kg

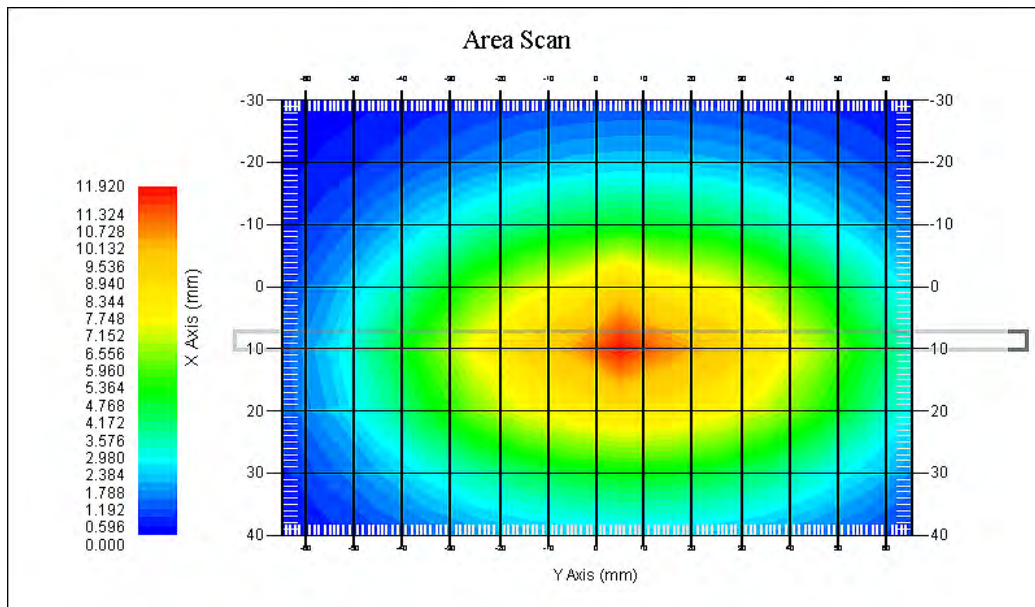

835 MHz System Validation with Body Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 1750 MHz Head Liquid****Dipole 1750 MHz; Type: ALS-D-1750-S-2; S/N: 198-00304**

Product Data

Device Name : Dipole 1750MHz
Serial No. : 198-00304
Type : Dipole
Model : ALS-D-1750-S-2
Frequency Band : 1700
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 41.359 W/kg
Power Drift-Finish : 41.220 W/kg
Power Drift (%) : -0.336

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : Head
Serial No. : 295-01101
Frequency : 1750.00 MHz
Last Calib. Date : 16-Oct-2016
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 39.83 F/m
Sigma : 1.36 S/m
Density : 1000.00 kg/cu. M


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Dec-2015
Frequency Band : 1750
Duty Cycle Factor : 1
Conversion Factor : 5.4
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 20.00 °C
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 37.529 W/kg
10 gram SAR value : 19.882 W/kg
Area Scan Peak SAR : 44.918 W/kg
Zoom Scan Peak SAR : 61.359 W/kg

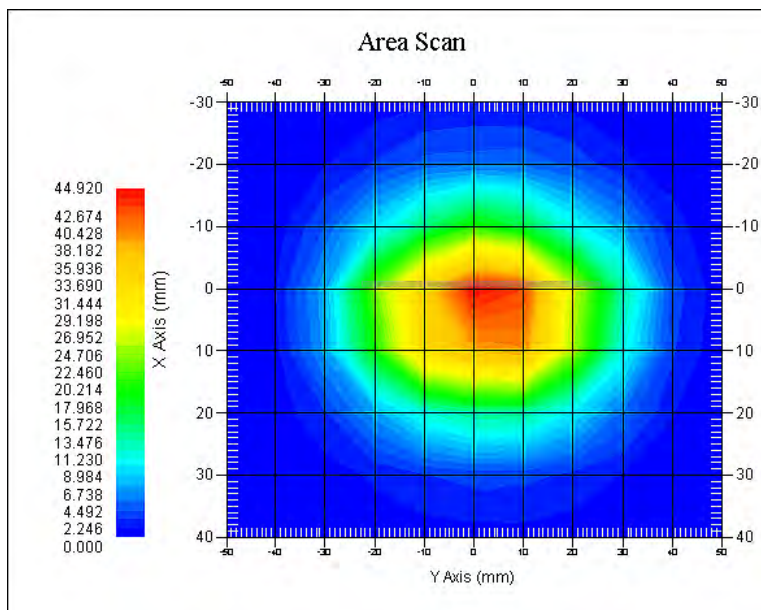

1750 MHz System Validation with Head Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 1750 MHz Body Liquid****Dipole 1750 MHz; Type: ALS-D-1750-S-2; S/N: 198-00304**

Product Data

Device Name : Dipole 1750MHz
Serial No. : 198-00304
Type : Dipole
Model : ALS-D-1750-S-2
Frequency Band : 1700
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 43.568 W/kg
Power Drift-Finish : 43.328 W/kg
Power Drift (%) : -0.551

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : Body
Serial No. : 295-02105
Frequency : 1750.00 MHz
Last Calib. Date : 16-Oct-2016
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 52.82 F/m
Sigma : 1.47 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Dec-2015
Frequency Band : 1750
Duty Cycle Factor : 1
Conversion Factor : 5.3
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 21.00 °C
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 36.295 W/kg
10 gram SAR value : 19.187 W/kg
Area Scan Peak SAR : 45.200 W/kg
Zoom Scan Peak SAR : 62.593 W/kg

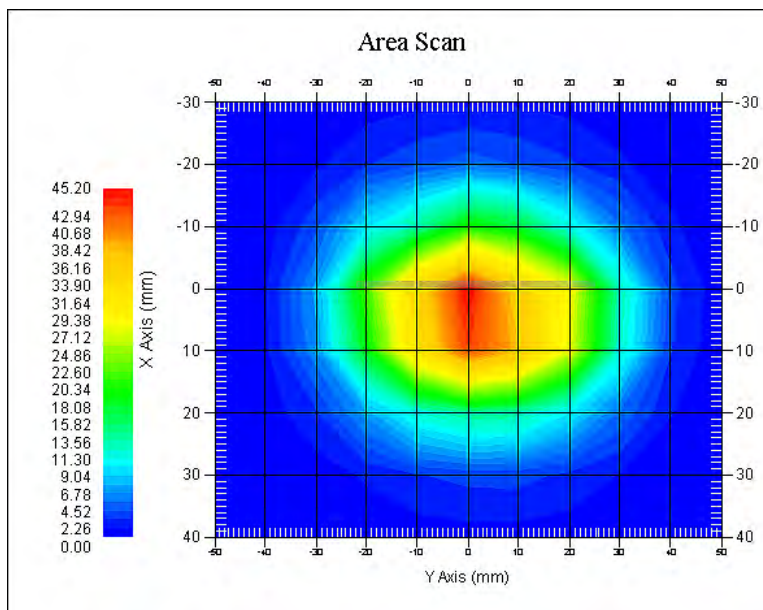

1750 MHz System Validation with Body Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 1900 MHz Head Liquid****Dipole 1900 MHz; Type: ALS-D-1900-S-2; S/N: 210-00710**

Product Data

Device Name : Dipole 1900MHz
Serial No. : 210-00710
Type : Dipole
Model : ALS-D-1900-S-2
Frequency Band : 1900
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 38.358 W/kg
Power Drift-Finish : 38.579 W/kg
Power Drift (%) : 0.576

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : Head
Serial No. : 295-01103
Frequency : 1900.00 MHz
Last Calib. Date : 14-Oct-2016
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 39.99 F/m
Sigma : 1.39 S/m
Density : 1000.00 kg/cu. M


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Dec-2015
Frequency Band : 1900
Duty Cycle Factor : 1
Conversion Factor : 4.8
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 20.00 °C
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 39.595 W/kg
10 gram SAR value : 20.083 W/kg
Area Scan Peak SAR : 42.600 W/kg
Zoom Scan Peak SAR : 68.054 W/kg

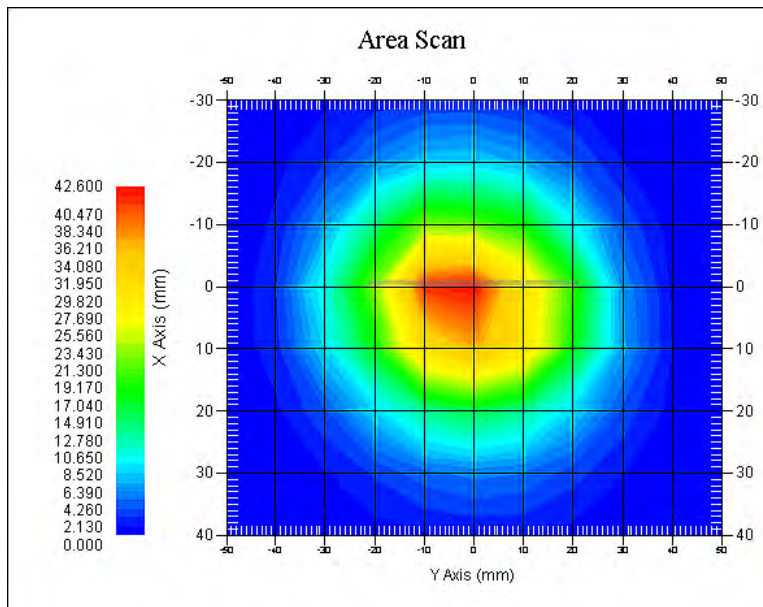

1900 MHz System Validation with Head Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 1900 MHz Body Liquid****Dipole 1900 MHz; Type: ALS-D-1900-S-2; S/N: 210-00710**

Product Data

Device Name : Dipole 1900MHz
Serial No. : 210-00710
Type : Dipole
Model : ALS-D-1900-S-2
Frequency Band : 1900
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 42.335 W/kg
Power Drift-Finish : 42.597 W/kg
Power Drift (%) : 0.619

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : Body
Serial No. : 295-02102
Frequency : 1900.00 MHz
Last Calib. Date : 15-Oct-2016
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 52.78 F/m
Sigma : 1.51 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Dec-2015
Frequency Band : 1900
Duty Cycle Factor : 1
Conversion Factor : 4.8
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 21.00 °C
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 39.972 W/kg
10 gram SAR value : 20.585 W/kg
Area Scan Peak SAR : 43.932 W/kg
Zoom Scan Peak SAR : 75.085 W/kg

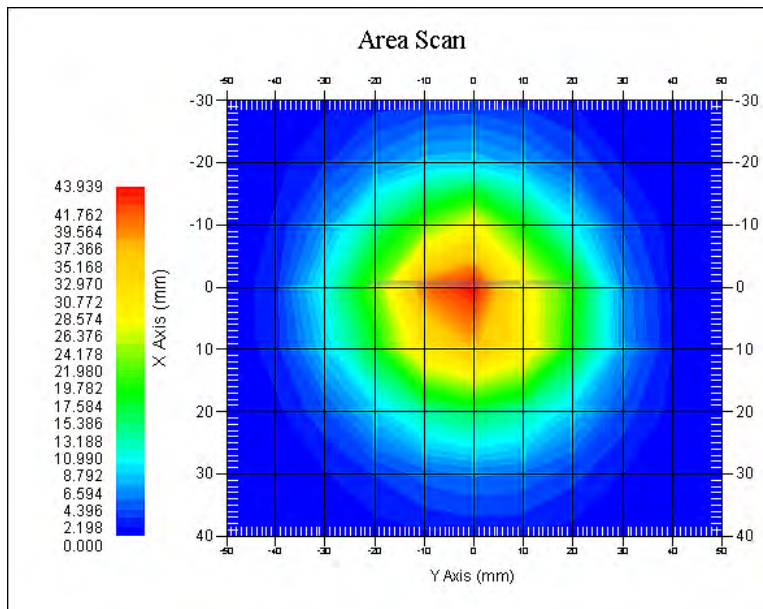

1900 MHz System Validation with Body Tissue

Cheek/Touch Position


The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line for the SCC-34/SC-2 head phantom.

This test position is established:

- When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
- (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek /Touch Position

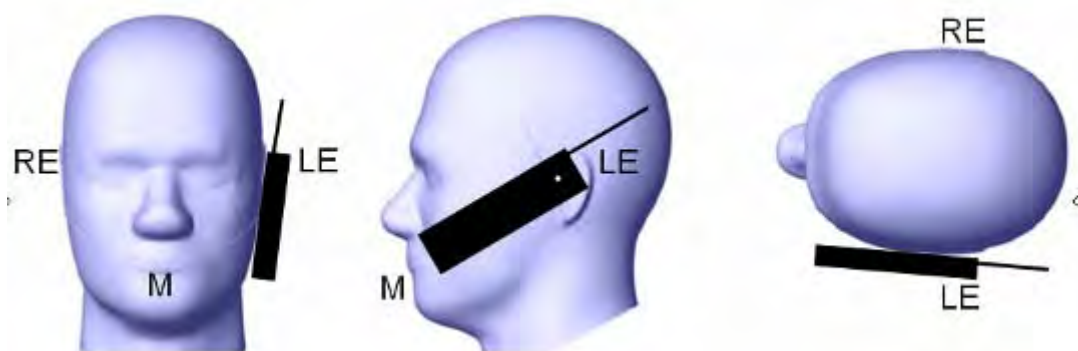

Ear/Tilt Position


With the handset aligned in the “Cheek/Touch Position”:

1) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.

2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, Middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the Middle channel for each test configuration (left, right, Cheek/Touch, Tile/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

Ear /Tilt 15° Position

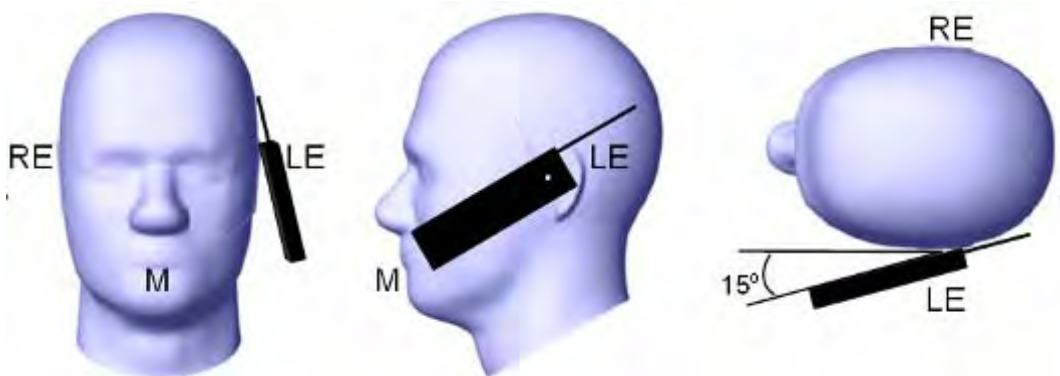

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

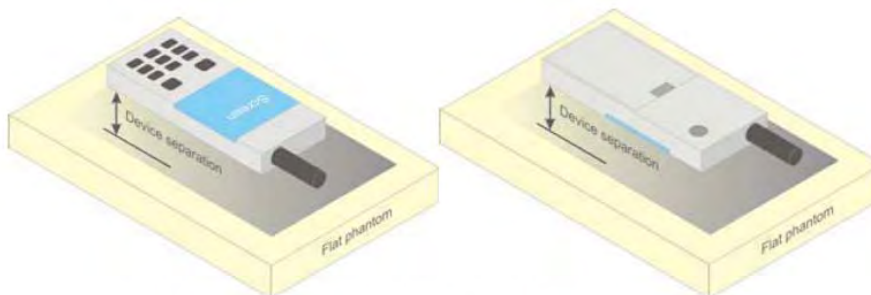


Figure 5 – Test positions for body-worn devices

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or EUT and the horizontal grid spacing was 10 mm x 10 mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

Test methodology

KDB 447498 D01 General RF Exposure Guidance v06.
KDB 648474 D04 Handset SAR v01r03.
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02 RF Exposure Reporting v01r02
KDB 941225 D01 3G SAR Procedures v03r01
KDB 941225 D05 SAR for LTE Devices v02r03
KDB 941225 D06 Hotspot Mode v02r01


CONDUCTED OUTPUT POWER MEASUREMENT

Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

Test Procedure

The RF output of the transmitter was connected to the input of the EMI Test Receiver through sufficient attenuation.

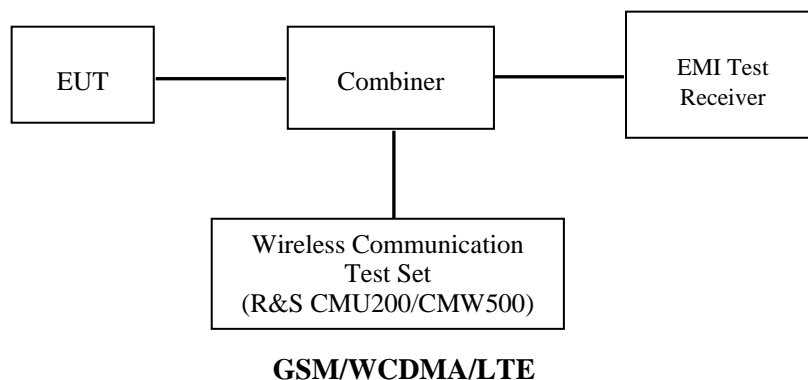

Radio Configuration

The power measurement was configured by the Wireless Communication Test Set CMU200 & CMW500 for all Radio configurations.

GSM

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection: Press Signal Off to turn off the signal and change settings

Network Support > GSM + only

MS Signal

> 33 dBm for GSM 850

> 30 dBm for PCS 1900

BS Signal: Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset >+ 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desired test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

TCH > choose desired test channel

Hopping > Off

AF/RF: Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection: Press Signal on to turn on the signal and change settings

GPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection: Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal: Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

BS Signal: Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset >+ 0 Hz

Mode >BCCH and TCH

BCCH Level >-85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desired test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping >Off

Main Timeslot >3

Network: Coding Scheme >CS4 (GPRS)

Bit Stream >2E9-1 PSR Bit Stream

AF/RF: Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection: Press Signal on to turn on the signal and change settings

EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection: Press Signal Off to turn off the signal and change settings

Network Support > GSM + EGPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal: Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 27 dBm for EGPRS 850

> 25 dBm for EGPRS 1900

BS Signal: Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset >+ 0 Hz

Mode >BCCH and TCH

BCCH Level >-85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desired test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping >Off

Main Timeslot >3

Network: Coding Scheme >MCS5 (EGPRS)

Bit Stream >2E9-1 PSR Bit Stream

AF/RF: Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection: Press Signal on to turn on the signal and change settings

WCDMA Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c / β_d	8/15

HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode Subset	HSDPA 1	HSDPA 2	HSDPA 3	HSDPA 4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c / β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	A _{hs} = β_{hs} / β_c	30/15			

HSPA+

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

Sub-test	β_c (Note3)	β_d	β_{hs} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

- Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.
- Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).
- Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.
- Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.
- Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
MPR(dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCIs	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	

LTE

For UE Power Class 1 and 3, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

For UE Power Class 1 and 3 the specific requirements and identified subclauses are specified in Table 6.2.4-1 along with the allowed A-MPR values that may be used to meet these requirements. The allowed A-MPR values specified below in Table 6.2.4.-1 to 6.2.4-15 are in addition to the allowed MPR requirements specified in subclause 6.2.3.

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
				Table 6.2.4-3	
NS_11	6.6.2.2.1	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9 Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2	23	5, 10, 15, 20	Table 6.2.4-15	
	6.6.2.2.1				
	6.6.3.2				
NS_32	-	-	-	-	-

Wi-Fi

For 802.11b, 802.11g and 802.11n-HT20 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442	/	/

For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 7 and 13.

For 802.11n-HT40 mode, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	6	2447
2	2427	7	2452
3	2432	8	2457
4	2437	9	2462
5	2442	/	/

EUT was tested with Channel 1, 5 and 9.

Maximum Output Power among production units

Max Target Power for Production Unit (dBm)				
Mode/Band	Channel			
	Low	Middle	High	
GSM 850	32.60	32.70	32.70	
GPRS 1 slot	32.60	32.60	32.60	
GPRS 2 slot	32.10	32.10	32.10	
GPRS 3 slot	30.70	30.70	30.70	
GPRS 4 slot	29.60	29.70	29.70	
EGPRS 1 slot	27.60	27.60	27.60	
EGPRS 2 slot	26.70	26.70	26.70	
EGPRS 3 slot	24.90	24.90	24.90	
EGPRS 4 slot	24.10	24.10	24.10	
PCS 1900	29.50	29.50	29.30	
GPRS 1 slot	29.50	29.50	29.50	
GPRS 2 slot	29.10	29.10	29.10	
GPRS 3 slot	27.50	27.40	27.50	
GPRS 4 slot	25.80	25.80	25.80	
EGPRS 1 slot	26.70	26.70	26.70	
EGPRS 2 slot	25.10	25.10	25.10	
EGPRS 3 slot	23.20	23.20	23.20	
EGPRS 4 slot	22.80	22.80	22.80	
WCDMA850	RMC	22.30	22.40	22.20
	HSDPA	21.70	21.70	21.70
	HSUPA	21.60	21.60	21.60
	DC-HSDPA	21.00	21.00	21.00
	HSPA+	20.90	20.90	20.90
WCDMA1900	RMC	22.50	22.60	22.40
	HSDPA	20.80	20.80	20.80
	HSUPA	20.80	20.80	20.80
	DC-HSDPA	20.80	20.80	20.80
	HSPA+	20.60	20.60	20.60
LTE Band2	22.40	22.40	22.40	
LTE Band4	21.50	21.50	21.50	
LTE Band7	22.10	22.10	22.10	
LTE Band17	22.00	22.00	22.00	
Wi-Fi	9.40	9.40	9.40	
Bluetooth	4.50	4.50	4.50	

Test Results:

GSM:

Band	Frequency (MHz)	Conducted Output Power (dBm)
GSM 850	824.2	32.54
	836.6	32.67
	848.8	32.63
PCS 1900	1850.2	29.44
	1880.0	29.46
	1909.8	29.25

GPRS:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	32.52	32.02	30.51	29.55
	190	836.6	32.53	32.05	30.63	29.67
	251	848.8	32.54	32.01	30.62	29.61
PCS 1900	512	1850.2	29.45	29.06	27.46	25.24
	661	1880.0	29.47	28.88	27.37	25.23
	810	1909.8	29.28	28.84	27.41	25.75

EGPRS:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	27.41	26.57	24.77	23.98
	190	836.6	27.52	26.66	24.84	24.05
	251	848.8	27.44	26.42	24.71	23.92
PCS 1900	512	1850.2	26.16	24.39	23.03	22.77
	661	1880.0	26.67	24.57	23.16	22.64
	810	1909.8	26.53	25.02	22.89	22.53

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

The time based average power for GPRS

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	23.52	26.02	26.26	26.55
	190	836.6	23.53	26.05	26.38	26.67
	251	848.8	23.54	26.01	26.37	26.61
PCS 1900	512	1850.2	20.45	23.06	23.21	22.24
	661	1880.0	20.47	22.88	23.12	22.23
	810	1909.8	20.28	22.84	23.16	22.75

The time based average power for EGPRS

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	18.41	20.57	20.52	20.98
	190	836.6	18.52	20.66	20.59	21.05
	251	848.8	18.44	20.42	20.46	20.92
PCS 1900	512	1850.2	17.16	18.39	18.78	19.77
	661	1880.0	17.67	18.57	18.91	19.64
	810	1909.8	17.53	19.02	18.64	19.53

Note:

1. Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GSM peak and average output power for active timeslots.
2. For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
3. For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).
4. For EGPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 6(850 MHz band) and 5(1900 MHz band).

Results (12.2kbps RMC)

WCDMA 850

Test Mode	3GPP Sub Test	Averaged Mean Power (dBm)		
		Low Frequency	Middle Frequency	High Frequency
RMC12.2k		22.23	22.34	22.18
HSDPA	1	21.67	21.34	21.34
	2	21.23	21.16	21.19
	3	20.95	20.83	20.55
	4	20.92	20.87	20.63
HSUPA	1	21.47	21.55	21.39
	2	21.23	21.26	21.12
	3	20.95	21.04	20.79
	4	20.96	21.08	20.88
	5	20.97	21.09	20.87
DC-HSDPA	1	20.92	20.93	20.95
	2	20.93	20.99	20.96
	3	20.95	20.84	20.86
	4	20.87	20.83	20.82
HSPA+	1	20.83	20.86	20.81

WCDMA 1900

Test Mode	3GPP Sub Test	Averaged Mean Power (dBm)			
		Low Frequency	Middle Frequency	High Frequency	
Test Condition	RMC12.2k		22.44	22.59	22.32
	HSDPA	1	20.65	20.72	20.69
		2	20.47	20.55	20.42
		3	20.33	20.46	20.37
		4	20.49	20.35	20.23
	HSUPA	1	20.71	20.52	20.42
		2	20.63	20.57	20.47
		3	20.65	20.59	20.43
		4	20.67	20.46	20.38
		5	20.56	20.54	20.22
	DC-HSDPA	1	20.72	20.63	20.63
		2	20.77	20.65	20.64
		3	20.75	20.56	20.58
		4	20.69	20.49	20.52
	HSPA+	1	20.56	20.45	20.40

Note:

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/HSPA+/DC-HSDPA when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

LTE Band 2:

BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Middle Channel	High Channel
					1850.7MHz	1880MHz	1909.3MHz
1.4M	QPSK	RB Size=1, RB Offset=0	0	0	22.00	22.04	22.05
		RB Size=1, RB Offset=2	0	0	22.05	21.98	22.07
		RB Size=1, RB Offset=5	0	0	22.05	22.15	21.97
		RB Size=3, RB Offset=0	1	1	21.86	21.87	21.98
		RB Size=3, RB Offset=1	1	1	22.01	21.91	21.92
		RB Size=3, RB Offset=2	1	1	21.86	21.92	21.98
		RB Size=6, RB Offset=0	1	1	21.61	21.64	21.74
	16QAM	RB Size=1, RB Offset=0	1	1	21.54	21.63	21.7
		RB Size=1, RB Offset=2	1	1	22.04	22.02	22.07
		RB Size=1, RB Offset=5	1	1	21.57	21.86	21.92
		RB Size=3, RB Offset=0	2	2	21.84	22.08	22.12
		RB Size=3, RB Offset=1	2	2	21.56	21.82	21.93
		RB Size=3, RB Offset=2	2	2	21.89	22.01	22.07
		RB Size=6, RB Offset=0	2	2	21.6	21.86	21.97
BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Middle Channel	High Channel
					1851.5MHz	1880MHz	1908.5MHz
3M	QPSK	RB Size=1, RB Offset=0	0	0	21.72	21.61	21.68
		RB Size=1, RB Offset=7	0	0	21.09	21.33	21.42
		RB Size=1, RB Offset=14	0	0	21.74	21.99	22.03
		RB Size=8, RB Offset=0	1	1	21.54	21.69	21.83
		RB Size=8, RB Offset=4	1	1	21.08	21.28	21.34
		RB Size=8, RB Offset=7	1	1	21.49	21.75	21.77
		RB Size=15, RB Offset=0	1	1	21.34	21.77	21.72
	16QAM	RB Size=1, RB Offset=0	1	1	21.42	21.84	21.8
		RB Size=1, RB Offset=7	1	1	22.29	22.09	21.67
		RB Size=1, RB Offset=14	1	1	21.66	21.96	21.73
		RB Size=8, RB Offset=0	2	2	21.69	21.75	21.75
		RB Size=8, RB Offset=4	2	2	21.97	22.19	22.03
		RB Size=8, RB Offset=7	2	2	21.79	22.16	21.95
		RB Size=15, RB Offset=0	2	2	21.64	21.78	21.72

BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Middle Channel	High Channel
					1852.5MHz	1880MHz	1907.5MHz
5M	QPSK	RB Size=1, RB Offset=0	0	0	21.99	21.77	22.18
		RB Size=1, RB Offset=12	0	0	21.98	21.78	22.11
		RB Size=1, RB Offset=24	0	0	21.66	21.71	21.63
		RB Size=12, RB Offset=0	1	1	21.57	21.84	21.69
		RB Size=12, RB Offset=6	1	1	21.61	21.82	21.65
		RB Size=12, RB Offset=11	1	1	21.50	21.81	21.59
		RB Size=25, RB Offset=0	1	1	21.62	21.78	21.74
	16QAM	RB Size=1, RB Offset=0	1	1	21.63	20.92	21.72
		RB Size=1, RB Offset=12	1	1	21.58	20.70	21.77
		RB Size=1, RB Offset=24	1	1	21.61	21.79	21.67
		RB Size=12, RB Offset=0	2	2	20.69	21.65	20.85
		RB Size=12, RB Offset=6	2	2	20.48	22.11	20.64
		RB Size=12, RB Offset=11	2	2	21.61	22.06	21.75
		RB Size=25, RB Offset=0	2	2	21.50	22.20	21.56
BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Middle Channel	High Channel
					1855MHz	1880MHz	1905MHz
10M	QPSK	RB Size=1, RB Offset=0	0	0	21.89	22.19	22.06
		RB Size=1, RB Offset=24	0	0	21.93	21.94	21.93
		RB Size=1, RB Offset=49	0	0	22.05	22.08	22.01
		RB Size=25, RB Offset=0	1	1	21.96	22.06	22.00
		RB Size=25, RB Offset=12	1	1	21.93	22.02	21.97
		RB Size=25, RB Offset=24	1	1	21.69	21.69	21.68
		RB Size=50, RB Offset=0	1	1	21.88	21.93	21.86
	16QAM	RB Size=1, RB Offset=0	1	1	22.03	22.13	22.12
		RB Size=1, RB Offset=24	1	1	21.99	22.06	22.00
		RB Size=1, RB Offset=49	1	1	21.75	21.78	21.8
		RB Size=25, RB Offset=0	2	2	21.56	21.62	21.57
		RB Size=25, RB Offset=12	2	2	21.63	21.66	21.67
		RB Size=25, RB Offset=24	2	2	21.60	21.69	21.63
		RB Size=50, RB Offset=0	2	2	21.66	21.75	21.77

BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Middle Channel	High Channel
					1857.5MHz	1880MHz	1902.5MHz
15M	QPSK	RB Size=1, RB Offset=0	0	0	21.84	21.68	21.69
		RB Size=1, RB Offset=37	0	0	21.54	21.62	21.64
		RB Size=1, RB Offset=74	0	0	21.58	21.69	21.68
		RB Size=36, RB Offset=0	1	1	21.88	22.00	21.98
		RB Size=36, RB Offset=18	1	1	21.72	21.76	21.78
		RB Size=36, RB Offset=37	1	1	21.57	21.65	21.61
	16QAM	RB Size=75, RB Offset=0	1	1	21.93	22.06	22.03
		RB Size=1, RB Offset=0	1	1	21.66	21.78	21.83
		RB Size=1, RB Offset=37	1	1	21.58	21.70	21.73
		RB Size=1, RB Offset=74	1	1	21.65	21.77	21.80
		RB Size=36, RB Offset=0	2	2	21.91	21.98	22.07
		RB Size=36, RB Offset=18	2	2	21.95	22.04	22.07
		RB Size=36, RB Offset=37	2	2	21.99	22.07	22.14
RB Size=75, RB Offset=0	2	2	22.31	22.11	22.05		
BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Middle Channel	High Channel
					1860MHz	1880MHz	1900MHz
20M	QPSK	RB Size=1, RB Offset=0	0	0	21.93	21.92	21.99
		RB Size=1, RB Offset=49	0	0	22.20	22.25	22.32
		RB Size=1, RB Offset=99	0	0	21.67	21.68	21.78
		RB Size=50, RB Offset=0	1	1	22.00	21.71	21.80
		RB Size=50, RB Offset=24	1	1	21.38	21.45	21.53
		RB Size=50, RB Offset=49	1	1	21.97	21.97	22.09
		RB Size=100, RB Offset=0	1	1	21.76	21.79	21.91
	16QAM	RB Size=1, RB Offset=0	1	1	21.28	21.34	21.42
		RB Size=1, RB Offset=49	1	1	21.69	21.76	21.86
		RB Size=1, RB Offset=99	1	1	21.59	21.67	21.78
		RB Size=50, RB Offset=0	2	2	21.68	21.71	21.79
		RB Size=50, RB Offset=24	2	2	21.84	22.04	21.72
		RB Size=50, RB Offset=49	2	2	21.61	21.69	21.78
RB Size=100, RB Offset=0	2	2	20.73	20.76	20.84		

LTE Band 4:

BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Middle Channel	High Channel
					1710.7MHz	1732.5MHz	1754.3MHz
1.4M	QPSK	RB Size=1, RB Offset=0	0	0	21.28	21.37	21.28
		RB Size=1, RB Offset=2	0	0	21.26	21.28	21.31
		RB Size=1, RB Offset=5	0	0	21.28	21.36	21.23
		RB Size=3, RB Offset=0	1	1	21.11	21.47	21.24
		RB Size=3, RB Offset=1	1	1	21.18	21.19	21.14
		RB Size=3, RB Offset=2	1	1	21.14	21.23	21.15
		RB Size=6, RB Offset=0	1	1	20.89	21.24	21.09
	16QAM	RB Size=1, RB Offset=0	1	1	20.89	20.96	21.15
		RB Size=1, RB Offset=2	1	1	21.32	20.95	20.91
		RB Size=1, RB Offset=5	1	1	21.06	21.34	20.87
		RB Size=3, RB Offset=0	2	2	21.33	21.18	21.24
		RB Size=3, RB Offset=1	2	2	21.05	21.4	21.09
		RB Size=3, RB Offset=2	2	2	21.38	21.14	21.29
		RB Size=6, RB Offset=0	2	2	21.09	21.33	21.1
BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Middle Channel	High Channel
					1711.5MHz	1732.5MHz	1753.5MHz
3M	QPSK	RB Size=1, RB Offset=0	0	0	21.17	21.19	21.23
		RB Size=1, RB Offset=7	0	0	20.54	20.95	21.13
		RB Size=1, RB Offset=14	0	0	21.19	21.3	20.85
		RB Size=8, RB Offset=0	1	1	20.99	21.07	20.59
		RB Size=8, RB Offset=4	1	1	20.53	20.59	21.2
		RB Size=8, RB Offset=7	1	1	20.94	21	21
		RB Size=15, RB Offset=0	1	1	20.79	20.92	20.51
	16QAM	RB Size=1, RB Offset=0	1	1	20.87	20.99	20.94
		RB Size=1, RB Offset=7	1	1	21.53	20.93	20.89
		RB Size=1, RB Offset=14	1	1	20.9	20.95	20.97
		RB Size=8, RB Offset=0	2	2	20.93	21.02	20.99
		RB Size=8, RB Offset=4	2	2	21.21	21.27	21.27
		RB Size=8, RB Offset=7	2	2	21.03	21.14	21.19
		RB Size=15, RB Offset=0	2	2	20.88	20.93	20.96

BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Middle Channel	High Channel
					1712.5MHz	1732.5MHz	1752.5MHz
5M	QPSK	RB Size=1, RB Offset=0	0	0	20.83	20.86	20.91
		RB Size=1, RB Offset=12	0	0	21.2	21.3	21.38
		RB Size=1, RB Offset=24	0	0	21.19	21.27	21.31
		RB Size=12, RB Offset=0	1	1	20.87	20.89	20.92
		RB Size=12, RB Offset=6	1	1	20.78	20.86	20.89
		RB Size=12, RB Offset=11	1	1	20.82	20.87	20.85
		RB Size=25, RB Offset=0	1	1	20.71	20.8	20.79
	16QAM	RB Size=1, RB Offset=0	1	1	20.83	20.93	20.94
		RB Size=1, RB Offset=12	1	1	20.84	20.91	20.92
		RB Size=1, RB Offset=24	1	1	20.79	20.9	20.97
		RB Size=12, RB Offset=0	2	2	20.82	20.87	20.87
		RB Size=12, RB Offset=6	2	2	19.9	20.01	20.05
		RB Size=12, RB Offset=11	2	2	19.69	19.79	19.84
		RB Size=25, RB Offset=0	2	2	20.82	20.88	20.95
BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Middle Channel	High Channel
					1715MHz	1732.5MHz	1750MHz
10M	QPSK	RB Size=1, RB Offset=0	0	0	20.67	20.72	20.74
		RB Size=1, RB Offset=24	0	0	21.05	21.18	21.25
		RB Size=1, RB Offset=49	0	0	21.29	21.35	21.28
		RB Size=25, RB Offset=0	1	1	21.2	21.33	21.27
		RB Size=25, RB Offset=12	1	1	21.17	21.29	21.29
		RB Size=25, RB Offset=24	1	1	20.93	20.96	21
		RB Size=50, RB Offset=0	1	1	21.19	21.29	21.28
	16QAM	RB Size=1, RB Offset=0	1	1	20.95	21.01	21.08
		RB Size=1, RB Offset=24	1	1	20.76	20.85	20.85
		RB Size=1, RB Offset=49	1	1	20.83	20.89	20.95
		RB Size=25, RB Offset=0	2	2	20.8	20.92	20.91
		RB Size=25, RB Offset=12	2	2	20.86	20.98	21.05
		RB Size=25, RB Offset=24	2	2	21.07	20.9	20.95
		RB Size=50, RB Offset=0	2	2	20.77	20.84	20.9

BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Middle Channel	High Channel
					1717.5MHz	1732.5MHz	1747.5MHz
15M	QPSK	RB Size=1, RB Offset=0	0	0	20.86	20.89	20.96
		RB Size=1, RB Offset=37	0	0	21.16	21.2	21.26
		RB Size=1, RB Offset=74	0	0	21	20.96	21.06
		RB Size=36, RB Offset=0	1	1	20.85	20.85	20.89
		RB Size=36, RB Offset=18	1	1	21.04	21	21.1
		RB Size=36, RB Offset=37	1	1	20.89	20.89	20.93
	16QAM	RB Size=75, RB Offset=0	1	1	21.25	21.3	21.29
		RB Size=1, RB Offset=0	1	1	20.99	21.03	21.04
		RB Size=1, RB Offset=37	1	1	20.91	20.95	20.94
		RB Size=1, RB Offset=74	1	1	21.17	21.16	21.21
		RB Size=36, RB Offset=0	2	2	21.21	21.22	21.21
		RB Size=36, RB Offset=18	2	2	21.25	21.25	21.28
		RB Size=36, RB Offset=37	2	2	21.57	21.29	21.19
		RB Size=75, RB Offset=0	2	2	21.16	21.13	21.12
BW	Modulation	Resource Block Size& Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Middle Channel	High Channel
					1720MHz	1732.5MHz	1745MHz
20M	QPSK	RB Size=1, RB Offset=0	0	0	21.42	21.48	21.43
		RB Size=1, RB Offset=49	0	0	20.89	20.91	20.89
		RB Size=1, RB Offset=99	0	0	21.29	20.94	20.91
		RB Size=50, RB Offset=0	1	1	20.6	20.68	20.64
		RB Size=50, RB Offset=24	1	1	21.19	21.20	21.13
		RB Size=50, RB Offset=49	1	1	20.98	21.02	21.02
	16QAM	RB Size=100, RB Offset=0	1	1	20.5	20.57	20.59
		RB Size=1, RB Offset=0	1	1	20.9	20.98	21.03
		RB Size=1, RB Offset=49	1	1	20.8	20.89	20.95
		RB Size=1, RB Offset=99	1	1	20.85	20.89	20.92
		RB Size=50, RB Offset=0	2	2	21.01	21.22	20.85
		RB Size=50, RB Offset=24	2	2	20.83	20.87	20.87
		RB Size=50, RB Offset=49	2	2	20.85	20.94	20.98
		RB Size=100, RB Offset=0	2	2	20.01	20.05	20.08

LTE Band 7:

BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Middle Channel	High Channel
					2502.5MHz	2535MHz	2567.5MHz
5M	QPSK	RB Size=1, RB Offset=0	0	0	21.19	21.44	21.35
		RB Size=1, RB Offset=12	0	0	21.27	21.38	21.41
		RB Size=1, RB Offset=24	0	0	21.66	21.62	21.74
		RB Size=12, RB Offset=0	1	1	21.57	21.53	21.66
		RB Size=12, RB Offset=6	1	1	21.68	21.68	21.76
		RB Size=12, RB Offset=11	1	1	21.68	21.7	21.84
		RB Size=25, RB Offset=0	1	1	21.62	21.56	21.65
	16QAM	RB Size=1, RB Offset=0	1	1	21.65	21.6	21.7
		RB Size=1, RB Offset=12	1	1	20.77	20.8	20.91
		RB Size=1, RB Offset=24	1	1	20.54	20.54	20.61
		RB Size=12, RB Offset=0	2	2	21.66	21.67	21.76
		RB Size=12, RB Offset=6	2	2	21.8	21.92	21.92
		RB Size=12, RB Offset=11	2	2	21.72	21.67	21.77
		RB Size=25, RB Offset=0	2	2	21.67	21.64	21.81
BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Middle Channel	High Channel
					2505MHz	2535MHz	2565MHz
10M	QPSK	RB Size=1, RB Offset=0	0	0	21.37	21.29	21.43
		RB Size=1, RB Offset=24	0	0	21.73	21.71	21.79
		RB Size=1, RB Offset=49	0	0	21.41	21.33	21.46
		RB Size=25, RB Offset=0	1	1	21.41	21.47	21.54
		RB Size=25, RB Offset=12	1	1	21.48	21.52	21.5
		RB Size=25, RB Offset=24	1	1	21.3	21.3	21.37
		RB Size=50, RB Offset=0	1	1	21.28	21.33	21.37
	16QAM	RB Size=1, RB Offset=0	1	1	21.75	21.73	21.74
		RB Size=1, RB Offset=24	1	1	21.65	21.69	21.73
		RB Size=1, RB Offset=49	1	1	21.78	21.78	21.85
		RB Size=25, RB Offset=0	2	2	21.7	21.74	21.77
		RB Size=25, RB Offset=12	2	2	21.69	21.75	21.79
		RB Size=25, RB Offset=24	2	2	21.72	21.77	21.88
		RB Size=50, RB Offset=0	2	2	20.82	20.89	20.93

BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Middle Channel	High Channel
					2507.5MHz	2535MHz	2562.5MHz
15M	QPSK	RB Size=1, RB Offset=0	0	0	21.89	21.92	21.99
		RB Size=1, RB Offset=37	0	0	21.76	21.74	21.84
		RB Size=1, RB Offset=74	0	0	21.73	21.67	21.89
		RB Size=36, RB Offset=0	1	1	21.6	21.78	21.79
		RB Size=36, RB Offset=18	1	1	21.66	21.91	21.82
		RB Size=36, RB Offset=37	1	1	21.64	21.38	21.52
		RB Size=75, RB Offset=0	1	1	21.86	21.56	21.62
	16QAM	RB Size=1, RB Offset=0	1	1	21.29	21.35	21.43
		RB Size=1, RB Offset=37	1	1	21.48	21.36	21.5
		RB Size=1, RB Offset=74	1	1	21.2	21.64	21.78
		RB Size=36, RB Offset=0	2	2	21.21	21.48	21.57
		RB Size=36, RB Offset=18	2	2	21.58	21.44	21.51
		RB Size=36, RB Offset=37	2	2	21.33	21.95	22.08
		RB Size=75, RB Offset=0	2	2	21.3	21.78	21.9
BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Middle Channel	High Channel
					2510MHz	2535MHz	2560MHz
20M	QPSK	RB Size=1, RB Offset=0	0	0	22.04	21.43	21.5
		RB Size=1, RB Offset=49	0	0	21.72	21.4	21.45
		RB Size=1, RB Offset=99	0	0	21.36	21.43	21.47
		RB Size=50, RB Offset=0	1	1	21.34	21.33	21.38
		RB Size=50, RB Offset=24	1	1	21.39	21.3	21.35
		RB Size=50, RB Offset=49	1	1	21.22	21.77	21.83
		RB Size=100, RB Offset=0	1	1	21.24	21.33	21.38
	16QAM	RB Size=1, RB Offset=0	1	1	21.68	21.8	21.86
		RB Size=1, RB Offset=49	1	1	21.63	21.72	21.71
		RB Size=1, RB Offset=99	1	1	21.62	21.78	21.79
		RB Size=50, RB Offset=0	2	2	21.59	21.68	21.67
		RB Size=50, RB Offset=24	2	2	21.63	21.74	21.72
		RB Size=50, RB Offset=49	2	2	20.76	20.88	20.93
		RB Size=100, RB Offset=0	2	2	20.88	20.91	20.91

LTE Band 17:

BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Middle Channel	High Channel
					706.5 MHz	710 MHz	713.5 MHz
5M	QPSK	RB Size=1, RB Offset=0	0	0	21.83	21.9	21.97
		RB Size=1, RB Offset=12	0	0	21.51	21.48	21.58
		RB Size=1, RB Offset=24	0	0	21.42	21.45	21.55
		RB Size=12, RB Offset=0	1	1	21.46	21.49	21.59
		RB Size=12, RB Offset=6	1	1	21.44	21.47	21.55
		RB Size=12, RB Offset=11	1	1	21.48	21.48	21.49
		RB Size=25, RB Offset=0	1	1	21.37	21.41	21.46
	16QAM	RB Size=1, RB Offset=0	1	1	21.49	21.54	21.4
		RB Size=1, RB Offset=12	1	1	21.5	21.52	21.55
		RB Size=1, RB Offset=24	1	1	21.45	21.51	21.53
		RB Size=12, RB Offset=0	2	2	21.48	21.48	21.58
		RB Size=12, RB Offset=6	2	2	20.56	20.62	21.48
		RB Size=12, RB Offset=11	2	2	20.35	20.4	20.66
		RB Size=25, RB Offset=0	2	2	21.48	21.49	20.45
BW	Modulation	Resource Block Size & Resource Block Offset	Target MPR	Meas MPR	Ave Tx Power (dBm)		
					Low Channel	Middle Channel	High Channel
					709 MHz	710 MHz	711 MHz
10M	QPSK	RB Size=1, RB Offset=0	0	0	21.37	21.39	21.51
		RB Size=1, RB Offset=24	0	0	21.81	21.82	21.32
		RB Size=1, RB Offset=49	0	0	21.93	21.96	21.83
		RB Size=25, RB Offset=0	1	1	21.84	21.94	21.7
		RB Size=25, RB Offset=12	1	1	21.81	21.9	21.78
		RB Size=25, RB Offset=24	1	1	21.57	21.57	21.77
		RB Size=50, RB Offset=0	1	1	21.83	21.93	21.95
	16QAM	RB Size=1, RB Offset=0	1	1	21.79	21.86	21.83
		RB Size=1, RB Offset=24	1	1	21.55	21.58	21.63
		RB Size=1, RB Offset=49	1	1	21.36	21.42	21.4
		RB Size=25, RB Offset=0	2	2	21.43	21.46	21.5
		RB Size=25, RB Offset=12	2	2	21.4	21.49	21.46
		RB Size=25, RB Offset=24	2	2	21.48	21.57	21.54
		RB Size=50, RB Offset=0	2	2	21.54	21.63	21.68

Note:

1. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
2. The CMW500 Wideband Radio Communication tester is used for LTE output power measurements and SAR testing. Closed loop power control is used to keep the radio transmitters the max output power during the test.
3. KDB941225D05v02- SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is > ½ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg

Bluetooth:

Mode	Channel No.	Channel frequency (MHz)	Conducted Output Power	
			(dBm)	(mW)
BDR(GFSK)	0	2402	4.43	2.773
	39	2441	4.41	2.761
	78	2480	4.45	2.786
EDR(4-DQPSK)	0	2402	3.92	2.466
	39	2441	3.94	2.477
	78	2480	3.93	2.472
EDR(8-DPSK)	0	2402	4.05	2.541
	39	2441	4.01	2.518
	78	2480	4.03	2.529
BLE	0	2402	-2.17	0.607
	19	2440	-3.35	0.462
	39	2480	-2.07	0.621

Wi-Fi:

Band	Channel No.	Channel frequency (MHz)	Conducted Output Power	
			(dBm)	(mW)
802.11b	1	2412	8.13	6.501
	7	2442	8.72	7.447
	13	2472	7.95	6.237
802.11g	1	2412	8.95	7.852
	7	2442	9.38	8.551
	13	2472	8.54	7.145
802.11n HT20	1	2412	8.62	7.278
	7	2442	9.27	8.453
	13	2472	8.66	7.345
802.11n HT40	1	2422	8.32	6.792
	5	2437	8.33	6.808
	9	2462	8.57	7.194

Note:

1. The output power was tested under data rate 1Mbps for 802.11b, 6Mbps for 802.11g, MCS0 for 802.11n HT20, MCS0 for 802.11n HT40.

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

SAR Test Data

Environmental Conditions

Temperature:	21-24 °C
Relative Humidity:	50-53 %
ATM Pressure:	1001-1002 mbar

Testing was performed by Lance Li, Hans Zhao, Sandy Zhang and River Rao on 2016-10-14 to 2016-10-16.

For the SAR data of the LTE Band 7, please refer to report RSZ150918003-20B Rev.

GSM 850:

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	824.2	GSM	/	/	/	/	/	/	/
	836.6	GSM	-0.297	32.67	32.70	1.007	0.326	0.328	1#
	848.8	GSM	/	/	/	/	/	/	/
Left Head Tilt	824.2	GSM	/	/	/	/	/	/	/
	836.6	GSM	-1.529	32.67	32.70	1.007	0.195	0.196	2#
	848.8	GSM	/	/	/	/	/	/	/
Right Head Cheek	824.2	GSM	1.984	32.54	32.60	1.014	0.320	0.324	3#
	836.6	GSM	0.894	32.67	32.70	1.007	0.380	0.383	4#
	848.8	GSM	0.594	32.63	32.70	1.016	0.340	0.346	5#
Right Head Tilt	824.2	GSM	/	/	/	/	/	/	/
	836.6	GSM	1.225	32.67	32.70	1.007	0.192	0.193	6#
	848.8	GSM	/	/	/	/	/	/	/

Note:

1. When the 1-g SAR is ≤ 0.8 W/Kg, testing for other channels are optional.
2. The EUT transmit and receive through the same antenna while testing SAR.

PCS Band:

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	1850.2	GSM	/	/	/	/	/		/
	1880.0	GSM	1.279	29.46	29.50	1.009	0.145	0.146	7#
	1909.8	GSM	/	/	/	/	/	/	/
Left Head Tilt	1850.2	GSM	/	/	/	/	/	/	/
	1880.0	GSM	0.204	29.46	29.50	1.009	0.092	0.093	8#
	1909.8	GSM	/	/	/	/	/	/	/
Right Head Cheek	1850.2	GSM	-0.877	29.44	29.50	1.014	0.139	0.141	9#
	1880.0	GSM	-1.877	29.46	29.50	1.009	0.158	0.159	10#
	1909.8	GSM	-0.777	29.25	29.30	1.012	0.151	0.153	11#
Right Head Tilt	1850.2	GSM	/	/	/	/	/	/	/
	1880.0	GSM	-0.258	29.46	29.50	1.009	0.086	0.087	12#
	1909.8	GSM	/	/	/	/	/	/	/

Note:

- 1 .When the 1-g SAR is $\leq 0.8W/Kg$, testing for other channels are optional.
2. The EUT transmit and receive through the same antenna while testing SAR.

WCDMA 850:

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	0.238	22.34	22.40	1.014	0.156	0.158	13#
	846.6	RMC	/	/	/	/	/	/	/
Left Head Tilt	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	-2.557	22.34	22.40	1.014	0.078	0.079	14#
	846.6	RMC	/	/	/	/	/	/	/
Right Head Cheek	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	0.715	22.34	22.40	1.014	0.174	0.176	15#
	846.6	RMC	/	/	/	/	/	/	/
Right Head Tilt	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	4.325	22.34	22.40	1.014	0.072	0.073	16#
	846.6	RMC	/	/	/	/	/	/	/

WCDMA1900:

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	1852.4	RMC	/	/	/	/	/	/	/
	1880.0	RMC	-0.128	22.59	22.60	1.002	0.184	0.184	17#
	1907.6	RMC	/	/	/	/	/	/	/
Left Head Tilt	1852.4	RMC	/	/	/	/	/	/	/
	1880.0	RMC	0.428	22.59	22.60	1.002	0.081	0.081	18#
	1907.6	RMC	/	/	/	/	/	/	/
Right Head Cheek	1852.4	RMC	/	/	/	/	/	/	/
	1880.0	RMC	0.897	22.59	22.60	1.002	0.149	0.149	19#
	1907.6	RMC	/	/	/	/	/	/	/
Right Head Tilt	1852.4	RMC	/	/	/	/	/	/	/
	1880.0	RMC	0.205	22.59	22.60	1.002	0.088	0.088	20#
	1907.6	RMC	/	/	/	/	/	/	/

Note:

1. When the 1-g SAR is $\leq 0.8W/Kg$, testing for other channels are optional.
2. The EUT transmit and receive through the same antenna while testing SAR.
3. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.

LTE Band 2:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	1860	20	1RB, Offset=49	/	/	/	/	/	/	/
	1880	20	1RB, Offset=49	/	/	/	/	/	/	/
	1900	20	1RB, Offset=49	1.143	22.32	22.40	1.019	0.203	0.207	21#
	1900	20	50%RB, Offset=49	1.282	22.09	22.40	1.074	0.189	0.203	22#
Left Head Tilt	1860	20	1RB, Offset=49	/	/	/	/	/	/	/
	1880	20	1RB, Offset=49	/	/	/	/	/	/	/
	1900	20	1RB, Offset=49	4.255	22.32	22.40	1.019	0.107	0.109	23#
	1900	20	50%RB, Offset=49	-1.818	22.09	22.40	1.074	0.095	0.102	24#
Right Head Cheek	1860	20	1RB, Offset=49	/	/	/	/	/	/	/
	1880	20	1RB, Offset=49	/	/	/	/	/	/	/
	1900	20	1RB, Offset=49	1.322	22.32	22.40	1.019	0.177	0.180	25#
	1900	20	50%RB, Offset=49	-2.564	22.09	22.40	1.074	0.161	0.173	26#
Right Head Tilt	1860	20	1RB, Offset=49	/	/	/	/	/	/	/
	1880	20	1RB, Offset=49	/	/	/	/	/	/	/
	1900	20	1RB, Offset=49	2.128	22.32	22.40	1.019	0.097	0.099	27#
	1900	20	50%RB, Offset=49	3.077	22.09	22.40	1.074	0.087	0.093	28#

LTE Band 4:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	1720	20	1RB, Offset=0	/	/	/	/	/	/	/
	1732.5	20	1RB, Offset=0	1.173	21.48	21.50	1.005	0.147	0.148	29#
	1745	20	1RB, Offset=0	/	/	/	/	/	/	/
	1732.5	20	50%RB, Offset=24	-3.659	21.20	21.50	1.072	0.139	0.149	30#
Left Head Tilt	1720	20	1RB, Offset=0	/	/	/	/	/	/	/
	1732.5	20	1RB, Offset=0	0.856	21.48	21.50	1.005	0.089	0.089	31#
	1745	20	1RB, Offset=0	/	/	/	/	/	/	/
	1732.5	20	50%RB, Offset=24	4.215	21.20	21.50	1.072	0.075	0.080	32#
Right Head Cheek	1720	20	1RB, Offset=0	/	/	/	/	/	/	/
	1732.5	20	1RB, Offset=0	1.332	21.48	21.50	1.005	0.132	0.133	33#
	1745	20	1RB, Offset=0	/	/	/	/	/	/	/
	1732.5	20	50%RB, Offset=24	-1.538	21.20	21.50	1.072	0.124	0.133	34#
Right Head Tilt	1720	20	1RB, Offset=0	/	/	/	/	/	/	/
	1732.5	20	1RB, Offset=0	-0.789	21.48	21.50	1.005	0.075	0.075	35#
	1745	20	1RB, Offset=0	/	/	/	/	/	/	/
	1732.5	20	50%RB, Offset=24	0.335	21.20	21.50	1.072	0.068	0.073	36#

LTE Band 17:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	709	10	1RB, Offset=49	/	/	/	/	/	/	/
	710	10	1RB, Offset=49	3.158	21.96	22.00	1.009	0.197	0.199	37#
	711	10	1RB, Offset=49	/	/	/	/	/	/	/
	710	10	50%RB, Offset=0	-1.124	21.94	22.00	1.014	0.173	0.175	38#
Left Head Tilt	709	10	1RB, Offset=49	/	/	/	/	/	/	/
	710	10	1RB, Offset=49	-1.087	21.96	22.00	1.009	0.107	0.108	39#
	711	10	1RB, Offset=49	/	/	/	/	/	/	/
	710	10	50%RB, Offset=0	1.223	21.94	22.00	1.014	0.096	0.097	40#
Right Head Cheek	709	10	1RB, Offset=49	/	/	/	/	/	/	/
	710	10	1RB, Offset=49	3.025	21.96	22.00	1.009	0.167	0.169	41#
	711	10	1RB, Offset=49	/	/	/	/	/	/	/
	710	10	50%RB, Offset=0	1.053	21.94	22.00	1.014	0.158	0.160	42#
Right Head Tilt	709	10	1RB, Offset=49	/	/	/	/	/	/	/
	710	10	1RB, Offset=49	-1.370	21.96	22.00	1.009	0.081	0.082	43#
	711	10	1RB, Offset=49	/	/	/	/	/	/	/
	710	10	50%RB, Offset=0	1.493	21.94	22.00	1.014	0.085	0.086	44#

Note:

1. When the 1-g SAR is ≤ 0.8 W/Kg, testing for other channels are optional.
2. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
3. KDB941225D05- SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg
4. The procedures required for 1 RB allocation are applied to measure the SAR for QPSK with 50% RB allocation
5. KDB941225D05- For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is < 1.45 W/kg, tests for the remaining required test channels are optional.
6. KDB941225D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
7. KDB941225D05- Start with the largest channel bandwidth (20M) and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, Middle and lower edge of each required test channel.

Mobile Hot-Spot Test Result

The DUT is capable of functioning as a Wi-Fi to Cellular Mobile hotspot. Additional SAR testing was performed according to KDB 941225 D06. Testing was performed with a separation of 1cm between the DUT and the flat phantom. The DUT was positioned for SAR tests with the front and back surfaces facing the phantom, and also with the edges facing the phantom in which the transmitting antenna is <2.5 cm from the edge. Each transmit band was utilized for SAR testing. The tested mode has been selected within each band that exhibits the highest time average output power.

Hot spot-GPRS and Body-Worn with Headset – GSM 850

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Worn-Headset (5 mm)	824.2	GSM	/	/	/	/	/	/	/
	836.6	GSM	0.483	32.67	32.70	1.007	0.307	0.309	45#
	848.8	GSM	/	/	/	/	/	/	/
Body-Back (10 mm)	824.2	GPRS	/	/	/	/	/	/	/
	836.6	GPRS	1.073	29.67	29.70	1.007	0.613	0.617	46#
	848.8	GPRS	/	/	/	/	/	/	/
Body-Left (10 mm)	824.2	GPRS	/	/	/	/	/	/	/
	836.6	GPRS	0.531	29.67	29.70	1.007	0.389	0.392	47#
	848.8	GPRS	/	/	/	/	/	/	/
Body-Bottom (10 mm)	824.2	GPRS	/	/	/	/	/	/	/
	836.6	GPRS	0.952	29.67	29.70	1.007	0.315	0.317	48#
	848.8	GPRS	/	/	/	/	/	/	/

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. The EUT transmit and receive through the same antenna while testing SAR.
3. The EUT is a Capability Class B Mobile Phone which can be attached to both GPRS and GSM services.
4. The Multi-slot Classes of EUT is Class12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.

Hot spot-GPRS and Body-Worn with Headset – PCS 1900

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Worn-Headset (5 mm)	1850.2	GSM	/	/	/	/	/	/	/
	1880.0	GSM	-0.326	29.03	29.10	1.016	0.177	0.180	49#
	1909.8	GSM	/	/	/	/	/	/	/
Body-Back (10 mm)	1850.2	GPRS	0.425	24.56	24.60	1.009	0.308	0.311	50#
	1880.0	GPRS	/	/	/	/	/	/	/
	1909.8	GPRS	/	/	/	/	/	/	/
Body-Left (10 mm)	1850.2	GPRS	0.833	24.56	24.60	1.009	0.112	0.113	51#
	1880.0	GPRS	/	/	/	/	/	/	/
	1909.8	GPRS	/	/	/	/	/	/	/
Body-Bottom (10 mm)	1850.2	GPRS	-0.375	24.56	24.60	1.009	0.275	0.278	52#
	1880.0	GPRS	/	/	/	/	/	/	/
	1909.8	GPRS	/	/	/	/	/	/	/

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. The EUT transmit and receive through the same antenna while testing SAR.
3. The EUT is a Capability Class B Mobile Phone which can be attached to both GPRS and GSM services.
4. The Multi-slot Classes of EUT is Class12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 2DL+3UL is the worst case.

Hot Spot and Body-Worn with Headset – WCDMA 850

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10 mm)	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	0.645	22.22	22.30	1.019	0.233	0.237	53#
	846.6	RMC	/	/	/	/	/	/	/
Body-Left (10 mm)	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	1.075	22.22	22.30	1.019	0.135	0.138	54#
	846.6	RMC	/	/	/	/	/	/	/
Body-Bottom (10 mm)	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	-1.203	22.22	22.30	1.019	0.085	0.087	55#
	846.6	RMC	/	/	/	/	/	/	/

Hot Spot and Body-Worn with Headset – WCDMA 1900

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10 mm)	1852.4	RMC	/	/	/	/	/	/	/
	1880.0	RMC	-0.264	22.65	22.70	1.012	0.315	0.319	56#
	1907.6	RMC	/	/	/	/	/	/	/
Body-Left (10 mm)	1852.4	RMC	/	/	/	/	/	/	/
	1880.0	RMC	0.415	22.65	22.70	1.012	0.138	0.140	57#
	1907.6	RMC	/	/	/	/	/	/	/
Body-Bottom (10 mm)	1852.4	RMC	/	/	/	/	/	/	/
	1880.0	RMC	0.513	22.65	22.70	1.012	0.252	0.255	58#
	1907.6	RMC	/	/	/	/	/	/	/

Note:

1. When the 1-g SAR is $\leq 0.8W/Kg$, testing for other channels are optional.
2. The EUT transmit and receive through the same antenna while testing SAR.
3. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.

Hot Spot-LTE Band 2

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10mm)	1860	1RB, Offset=49	/	/	/	/	/	/	/
	1880	1RB, Offset=49	/	/	/	/	/	/	/
	1900	1RB, Offset=49	0.166	22.32	22.40	1.019	0.409	0.417	59#
	1900	50%RB, Offset=49	0.395	22.09	22.40	1.074	0.402	0.432	60#
Body-Left (10mm)	1860	1RB, Offset=49	/	/	/	/	/	/	/
	1880	1RB, Offset=49	/	/	/	/	/	/	/
	1900	1RB, Offset=49	1.724	22.32	22.40	1.019	0.173	0.176	61#
	1900	50%RB, Offset=49	-1.905	22.09	22.40	1.074	0.182	0.195	62#
Body-Bottom (10mm)	1860	1RB, Offset=49	/	/	/	/	/	/	/
	1880	1RB, Offset=49	/	/	/	/	/	/	/
	1900	1RB, Offset=49	0.388	22.32	22.40	1.019	0.301	0.307	63#
	1900	50%RB, Offset=49	-0.727	22.09	22.40	1.074	0.271	0.291	64#

Hot Spot-LTE Band 4

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10mm)	1720	1RB, Offset=0	/	/	/	/	/	/	/
	1732.5	1RB, Offset=0	-1.176	21.48	21.5	1.005	0.263	0.264	65#
	1745	1RB, Offset=0	/	/	/	/	/	/	/
	1732.5	50%RB, Offset=24	1.493	21.2	21.5	1.072	0.243	0.260	66#
Body-Left (10mm)	1720	1RB, Offset=0	/	/	/	/	/	/	/
	1732.5	1RB, Offset=0	2.381	21.48	21.5	1.005	0.117	0.118	67#
	1745	1RB, Offset=0	/	/	/	/	/	/	/
	1732.5	50%RB, Offset=24	-2.632	21.2	21.5	1.072	0.114	0.122	68#
Body-Bottom (10mm)	1720	1RB, Offset=0	/	/	/	/	/	/	/
	1732.5	1RB, Offset=0	1.141	21.48	21.5	1.005	0.237	0.238	69#
	1745	1RB, Offset=0	/	/	/	/	/	/	/
	1732.5	50%RB, Offset=24	-0.778	21.2	21.5	1.072	0.217	0.233	70#

Hot Spot-LTE Band 17


EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10mm)	709	1RB, Offset=49	/	/	/	/	/	/	/
	710	1RB, Offset=49	0.694	21.96	22	1.009	0.367	0.370	71#
	711	1RB, Offset=49	/	/	/	/	/	/	/
	710	50%RB, Offset=0	-4.348	21.94	22	1.014	0.348	0.353	72#
Body-Left (10mm)	709	1RB, Offset=49	/	/	/	/	/	/	/
	710	1RB, Offset=49	1.389	21.96	22	1.009	0.179	0.181	73#
	711	1RB, Offset=49	/	/	/	/	/	/	/
	710	50%RB, Offset=0	1.274	21.94	22	1.014	0.172	0.174	74#
Body-Bottom (10mm)	709	1RB, Offset=49	/	/	/	/	/	/	/
	710	1RB, Offset=49	0.763	21.96	22	1.009	0.147	0.148	75#
	711	1RB, Offset=49	/	/	/	/	/	/	/
	710	50%RB, Offset=0	0.812	21.94	22	1.014	0.135	0.137	76#

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
3. KDB941225D05- SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is $> 1.45\text{ W/kg}$
4. The procedures required for 1 RB allocation are applied to measure the SAR for QPSK with 50% RB allocation
5. KDB941225D05- For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is $< 1.45\text{ W/kg}$, tests for the remaining required test channels are optional.
6. KDB941225D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are $\leq 0.8\text{ W/kg}$.
7. KDB941225D05- Start with the largest channel bandwidth (20M) and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, Middle and lower edge of each required test channel.

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

BT& Wi-Fi and LTE&GSM&3G Antennas Location:

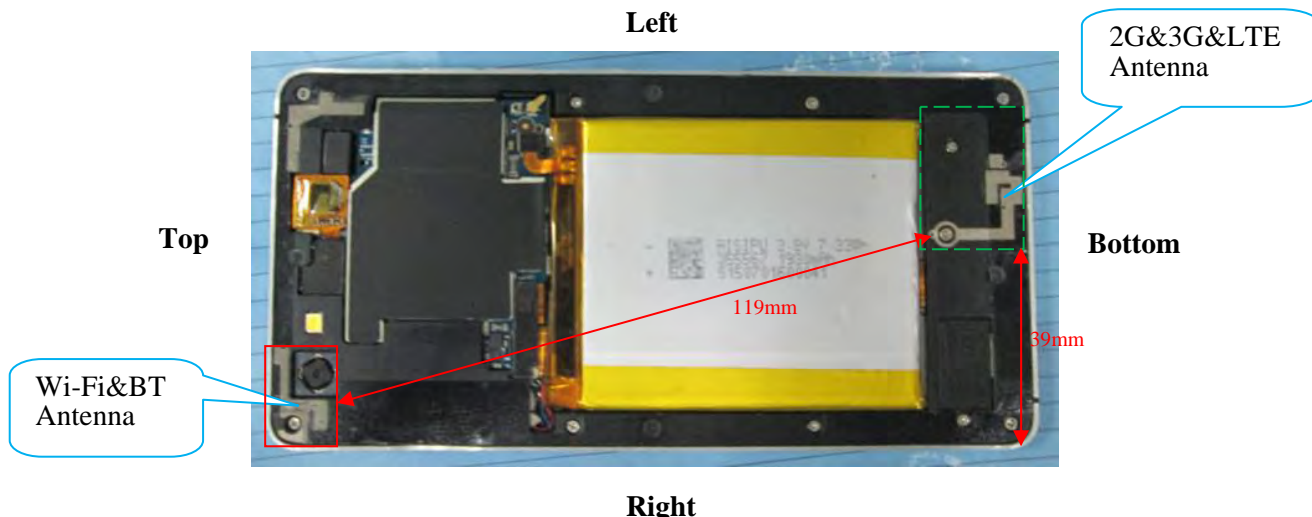

Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities			Antennas Distance (mm)
Transmitter Combination	Simultaneous?	Hotspot?	
GSM + WCDMA	×	×	0
GSM + LTE	×	×	0
GSM + Bluetooth	√	×	119
GSM + Wi-Fi	√	√	119
WCDMA + LTE	×	×	0
WCDMA + Bluetooth	√	×	119
WCDMA + Wi-Fi	√	√	119
LTE+ Bluetooth	√	×	119
LTE+ Wi-Fi	√	√	119

Standalone SAR test exclusion considerations

Mode	Position	Max tune up power		Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
		(dBm)	(mW)				
Wi-Fi	Head	9.40	8.71	0	2.7	3.0	Yes
Bluetooth		4.50	2.82	0	0.9		
Wi-Fi	Body	9.40	8.71	10	1.4		
Bluetooth		4.50	2.82	10	0.5		

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Standalone SAR estimation:

Mode	Frequency (GHz)	Distance (mm)	Max tune up power		Estimated 1-g (W/kg)
			(dBm)	(mW)	
BT Head	2.48	0	4.50	2.82	0.118
BT Body	2.48	10	4.50	2.82	0.059
Wi-Fi Head	2.472	0	9.40	8.71	0.365
Wi-Fi Body	2.472	10	9.40	8.71	0.183

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

Simultaneous SAR test exclusion considerations:

GSM with BT:

Mode	Position	Reported SAR (W/kg)		Σ SAR $< 1.6 \text{ W/kg}$
		GSM	BT	
GSM850	Left Head Cheek	0.328	0.118	0.446
	Left Head Tilt	0.196	0.118	0.314
	Right Head Cheek	0.383	0.118	0.501
	Right Head Tilt	0.193	0.118	0.311
	Body-Headset-Back	0.309	0.059	0.368
PCS1900	Left Head Cheek	0.187	0.118	0.264
	Left Head Tilt	0.108	0.118	0.211
	Right Head Cheek	0.200	0.118	0.277
	Right Head Tilt	0.097	0.118	0.205
	Body-Headset-Back	0.180	0.059	0.239

WCDMA with BT:

Mode	Position	Reported SAR (W/kg)		ΣSAR
		WCDMA	BT	< 1.6W/kg
WCDMA 850	Left Head Cheek	0.158	0.118	0.276
	Left Head Tilt	0.079	0.118	0.197
	Right Head Cheek	0.176	0.118	0.294
	Right Head Tilt	0.073	0.118	0.191
WCDMA1900	Left Head Cheek	0.184	0.118	0.302
	Left Head Tilt	0.081	0.118	0.199
	Right Head Cheek	0.149	0.118	0.267
	Right Head Tilt	0.088	0.118	0.206

LTE with BT:

Mode	Position	Reported SAR (W/kg)		ΣSAR	Remark
		LTE	BT	< 1.6W/kg	
LTE Band 2	Left Head Cheek	0.207	0.118	0.325	/
	Left Head Tilt	0.109	0.118	0.227	/
	Right Head Cheek	0.180	0.118	0.298	/
	Right Head Tilt	0.099	0.118	0.217	/
LTE Band 4	Left Head Cheek	0.149	0.118	0.267	/
	Left Head Tilt	0.089	0.118	0.207	/
	Right Head Cheek	0.133	0.118	0.251	/
	Right Head Tilt	0.075	0.118	0.193	/
LTE Band 7	Left Head Cheek	0.271	0.118	0.389	Originated from Report RSZ150918003 -20B Rev
	Left Head Tilt	0.164	0.118	0.282	
	Right Head Cheek	0.275	0.118	0.393	
	Right Head Tilt	0.137	0.118	0.255	
LTE Band 17	Left Head Cheek	0.199	0.118	0.317	/
	Left Head Tilt	0.108	0.118	0.226	/
	Right Head Cheek	0.169	0.118	0.287	/
	Right Head Tilt	0.086	0.118	0.204	/

GSM with Wi-Fi:

Mode	Position	Reported SAR (W/kg)		ΣSAR
		GSM	Wi-Fi	< 1.6W/kg
GSM850	Left Head Cheek	0.328	0.365	0.693
	Left Head Tilt	0.196	0.365	0.561
	Right Head Cheek	0.383	0.365	0.748
	Right Head Tilt	0.193	0.365	0.558
	Body-Headset-Back	0.309	0.183	0.492
PCS1900	Left Head Cheek	0.187	0.365	0.552
	Left Head Tilt	0.108	0.365	0.473
	Right Head Cheek	0.200	0.365	0.565
	Right Head Tilt	0.097	0.365	0.462
	Body-Headset-Back	0.180	0.183	0.363

WCDMA with Wi-Fi:

Mode	Position	Reported SAR (W/kg)		ΣSAR
		WCDMA	Wi-Fi	< 1.6W/kg
WCDMA 850	Left Head Cheek	0.158	0.365	0.523
	Left Head Tilt	0.079	0.365	0.444
	Right Head Cheek	0.176	0.365	0.541
	Right Head Tilt	0.073	0.365	0.438
WCDMA1900	Left Head Cheek	0.184	0.365	0.549
	Left Head Tilt	0.081	0.365	0.446
	Right Head Cheek	0.149	0.365	0.514
	Right Head Tilt	0.088	0.365	0.453

LTE with Wi-Fi:

Mode	Position	Reported SAR (W/kg)		ΣSAR	Remark
		LTE	Wi-Fi	< 1.6W/kg	
LTE Band 2	Left Head Cheek	0.207	0.365	0.572	
	Left Head Tilt	0.109	0.365	0.474	
	Right Head Cheek	0.180	0.365	0.545	
	Right Head Tilt	0.099	0.365	0.464	
LTE Band 4	Left Head Cheek	0.149	0.365	0.514	
	Left Head Tilt	0.089	0.365	0.454	
	Right Head Cheek	0.133	0.365	0.498	
	Right Head Tilt	0.075	0.365	0.44	
LTE Band 7	Left Head Cheek	0.271	0.365	0.636	Originated from Report RSZ150918003-20B Rev
	Left Head Tilt	0.164	0.365	0.529	
	Right Head Cheek	0.275	0.365	0.64	
	Right Head Tilt	0.137	0.365	0.502	
LTE Band 17	Left Head Cheek	0.199	0.365	0.564	
	Left Head Tilt	0.108	0.365	0.473	
	Right Head Cheek	0.169	0.365	0.534	
	Right Head Tilt	0.086	0.365	0.451	

Conclusion:

ΣSAR < 1.6 W/kg therefore simultaneous transmission SAR with Volume Scans is **not** required.

Evaluations for Simultaneous SAR, BT+WWAN					
Test Position	Body-Back (1.0cm)	Body-Left (1.0cm)	Body-Right (1.0cm)	Body-Bottom (1.0cm)	Body-Top (1.0cm)
Mode	Stand Alone 1-g SAR (W/Kg)				
GPRS 850	0.617	0.392	0.317	/	/
GPRS 1900	0.311	0.113	0.278	/	/
WCDMA850	0.237	0.138	0.087	/	/
WCDMA 1900	0.319	0.140	0.255	/	/
LTE Band 2	0.432	0.195	0.307	/	/
LTE Band 4	0.264	0.122	0.238	/	/
LTE Band 7	0.473	0.276	0.452	/	/
LTE Band 17	0.37	0.181	0.148	/	/
BT	0.059	0.059	0.059	0.059	0.059
	Σ 1-g SAR(W/Kg)				
GPRS850 + BT	0.676	0.451	0.376	/	/
GPRS1900 + BT	0.370	0.172	0.337	/	/
WCDMA850 + BT	0.296	0.197	0.146	/	/
WCDMA 1900+ BT	0.378	0.199	0.314	/	/
LTE Band 2+ BT	0.491	0.254	0.366	/	/
LTE Band 4+ BT	0.323	0.181	0.297	/	/
LTE Band 7+ BT	0.532	0.335	0.511	/	/
LTE Band 17+ Wi-Fi	0.429	0.24	0.207	/	/

Evaluations for Simultaneous SAR, Mobile Hot Spot Positions					
Test Position	Body-Back (1.0cm)	Body-Left (1.0cm)	Body-Right (1.0cm)	Body-Bottom (1.0cm)	Body-Top (1.0cm)
Mode	Stand Alone 1-g SAR (W/Kg)				
GPRS 850	0.617	0.392	0.317	/	/
GPRS 1900	0.311	0.113	0.278	/	/
WCDMA850	0.237	0.138	0.087	/	/
WCDMA 1900	0.319	0.140	0.255	/	/
LTE Band 2	0.432	0.195	0.307	/	/
LTE Band 4	0.264	0.122	0.238	/	/
LTE Band 7	0.473	0.276	0.452	/	/
LTE Band 17	0.37	0.181	0.148	/	/
Wi-Fi	0.183	0.183	0.183	0.183	0.183
	Σ 1-g SAR(W/Kg)				
GPRS850 + Wi-Fi	0.800	0.575	0.500	/	/
GPRS1900 + Wi-Fi	0.494	0.296	0.461	/	/
WCDMA850 + Wi-Fi	0.420	0.321	0.270	/	/
WCDMA 1900+ Wi-Fi	0.502	0.323	0.438	/	/
LTE Band 2+ Wi-Fi	0.615	0.378	0.490	/	/
LTE Band 4+ Wi-Fi	0.447	0.305	0.421	/	/
LTE Band 7+ Wi-Fi	0.656	0.459	0.635	/	/
LTE Band 17+ Wi-Fi	0.553	0.364	0.331	/	/

Note:

1. If the sum of the 1g SAR measured for the simultaneously transmitting antennas is less than the SAR limit, SAR measurement for simultaneous transmission is not required.
2. SAR value for LTE band 7 originated from Report RSZ150918003-20B Rev

SAR Plots

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Left Head Cheek (836.6 MHz Middle Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.006 W/kg
 Power Drift-Finish : 0.006 W/kg
 Power Drift (%) : -0.297

Tissue Data


Type : Head
 Frequency : 836.6 MHz
 Epsilon : 40.45 F/m
 Sigma : 0.88 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 8
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.326 W/kg
 10 gram SAR value : 0.217 W/kg
 Area Scan Peak SAR : 0.349 W/kg
 Zoom Scan Peak SAR : 0.436 W/kg

Plot 1#

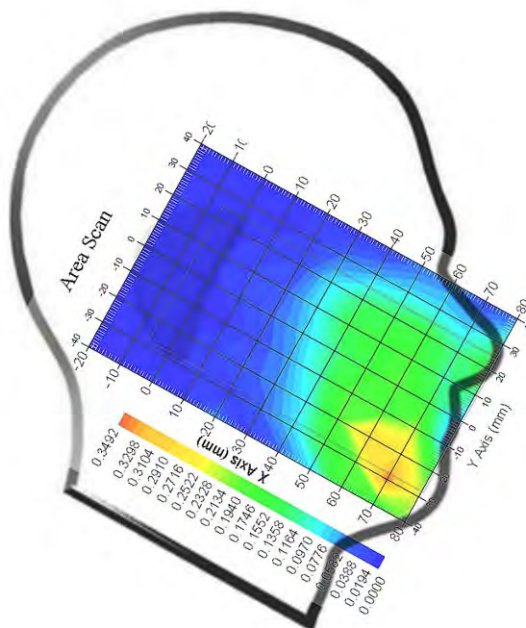

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Left Head 15° Tilt (836.6 MHz Middle Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.065 W/kg
 Power Drift-Finish : 0.064 W/kg
 Power Drift (%) : -1.529

Tissue Data


Type : Head
 Frequency : 836.6 MHz
 Epsilon : 40.45 F/m
 Sigma : 0.88 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 8
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.195 W/kg
 10 gram SAR value : 0.113 W/kg
 Area Scan Peak SAR : 0.207 W/kg
 Zoom Scan Peak SAR : 0.348 W/kg

Plot 2#

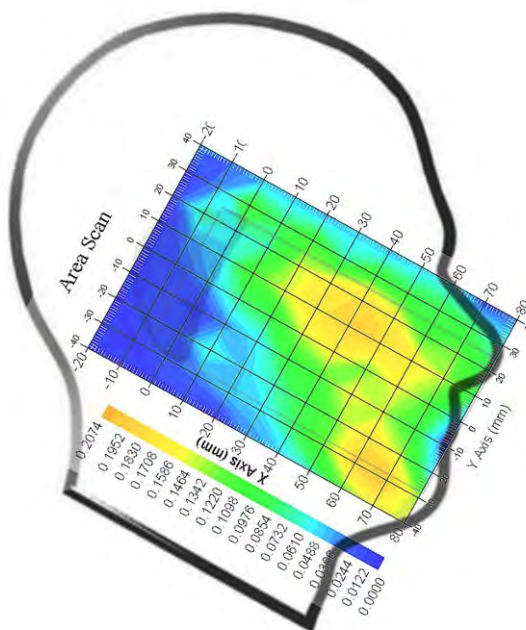

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Right Head Cheek (824.2 MHz Low Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.007 W/kg
 Power Drift-Finish : 0.007 W/kg
 Power Drift (%) : 1.984

Tissue Data


Type : Head
 Frequency : 824.2 MHz
 Epsilon : 40.33 F/m
 Sigma : 0.86 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 8
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.320 W/kg
 10 gram SAR value : 0.203 W/kg
 Area Scan Peak SAR : 0.356 W/kg
 Zoom Scan Peak SAR : 0.491 W/kg

Plot 3#

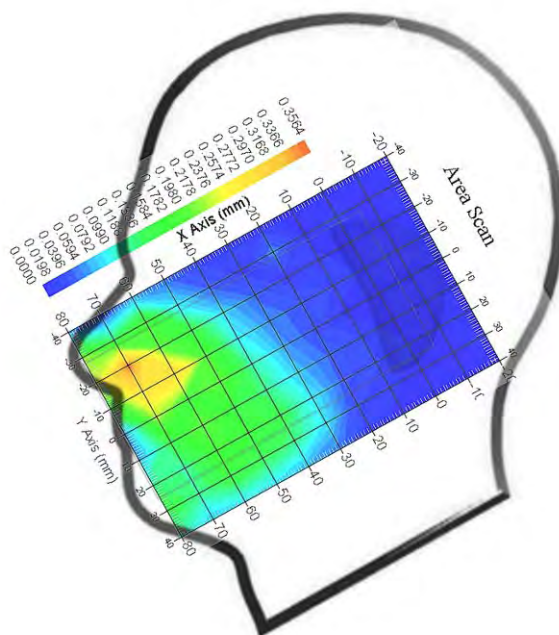

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Right Head Cheek (836.6 MHz Middle Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.005 W/kg
 Power Drift-Finish : 0.005 W/kg
 Power Drift (%) : 0.894

Tissue Data


Type : Head
 Frequency : 836.6 MHz
 Epsilon : 40.45 F/m
 Sigma : 0.88 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 8
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.380 W/kg
 10 gram SAR value : 0.211 W/kg
 Area Scan Peak SAR : 0.392 W/kg
 Zoom Scan Peak SAR : 0.451 W/kg

Plot 4#

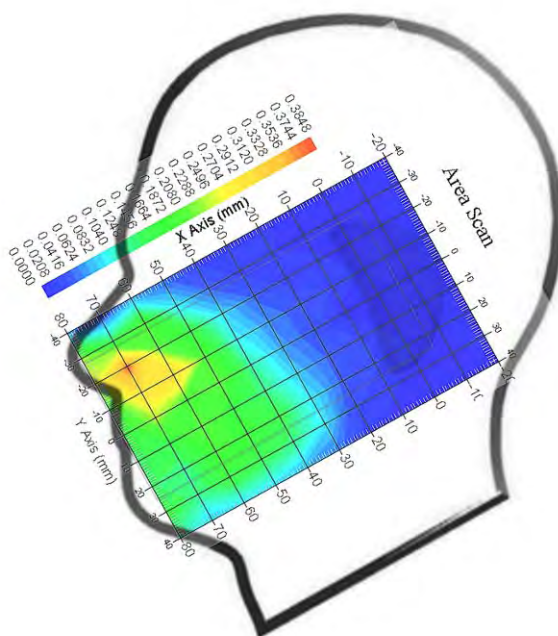

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Right Head Cheek (848.8 MHz High Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.005 W/kg
 Power Drift-Finish : 0.005 W/kg
 Power Drift (%) : 0.594

Tissue Data


Type : Head
 Frequency : 848.8 MHz
 Epsilon : 40.68 F/m
 Sigma : 0.90 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 8
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.340 W/kg
 10 gram SAR value : 0.213 W/kg
 Area Scan Peak SAR : 0.356 W/kg
 Zoom Scan Peak SAR : 0.491 W/kg

Plot 5#

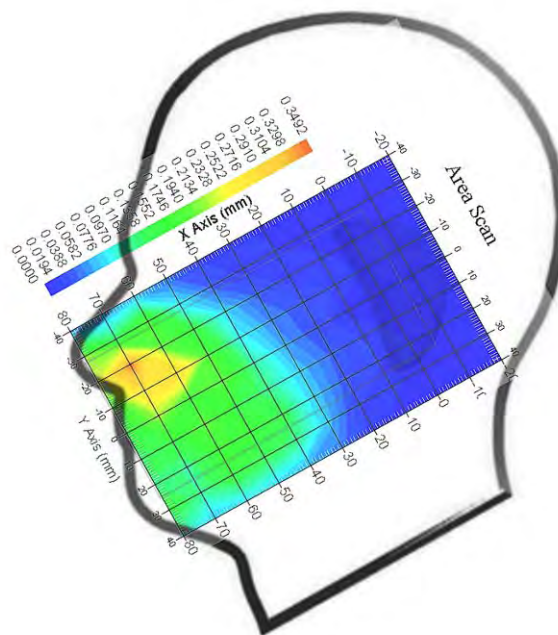

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Right Head 15° Tilt (836.6 MHz Middle Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.062 W/kg
 Power Drift-Finish : 0.063 W/kg
 Power Drift (%) : 1.225

Tissue Data


Type : Head
 Frequency : 836.6 MHz
 Epsilon : 40.45 F/m
 Sigma : 0.88 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 8
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.192 W/kg
 10 gram SAR value : 0.113 W/kg
 Area Scan Peak SAR : 0.200 W/kg
 Zoom Scan Peak SAR : 0.374 W/kg

Plot 6#

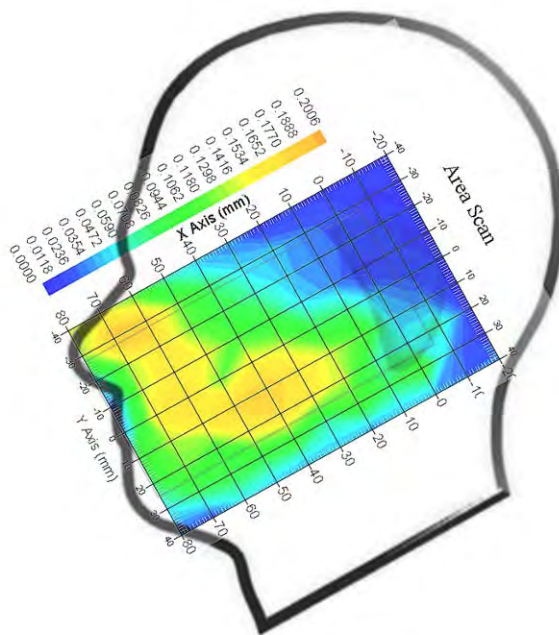

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Left Head Cheek(1880.0 MHz Middle Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 10x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.002 W/kg
 Power Drift-Finish : 0.002 W/kg
 Power Drift (%) : 1.279

Tissue Data


Type : Head
 Frequency : 1880.0 MHz
 Epsilon : 39.97 F/m
 Sigma : 1.38 S/m
 Density : 1000.00 kg/cu. M

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 8
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.145 W/kg
 10 gram SAR value : 0.072 W/kg
 Area Scan Peak SAR : 0.191 W/kg
 Zoom Scan Peak SAR : 0.287 W/kg

Plot 7#

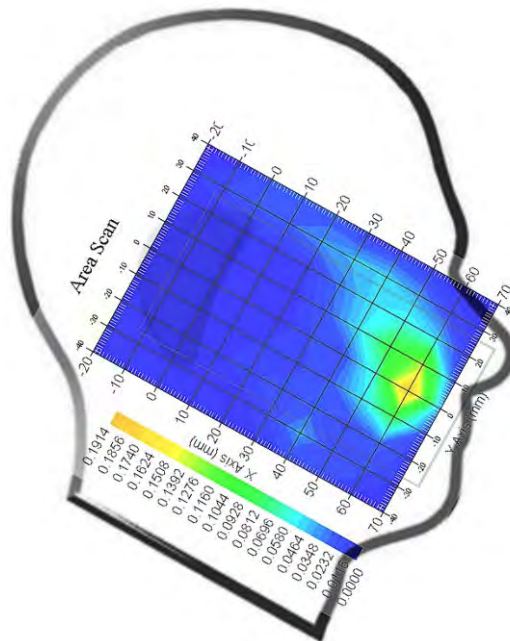

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Left Head 15° Tilt (1880.0 MHz Middle Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 10x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.002 W/kg
 Power Drift-Finish : 0.002 W/kg
 Power Drift (%) : 0.204

Tissue Data


Type : Head
 Frequency : 1880.0 MHz
 Epsilon : 39.97 F/m
 Sigma : 1.38 S/m
 Density : 1000.00 kg/cu. M

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 8
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.092 W/kg
 10 gram SAR value : 0.043 W/kg
 Area Scan Peak SAR : 0.114 W/kg
 Zoom Scan Peak SAR : 0.226 W/kg

Plot 8#

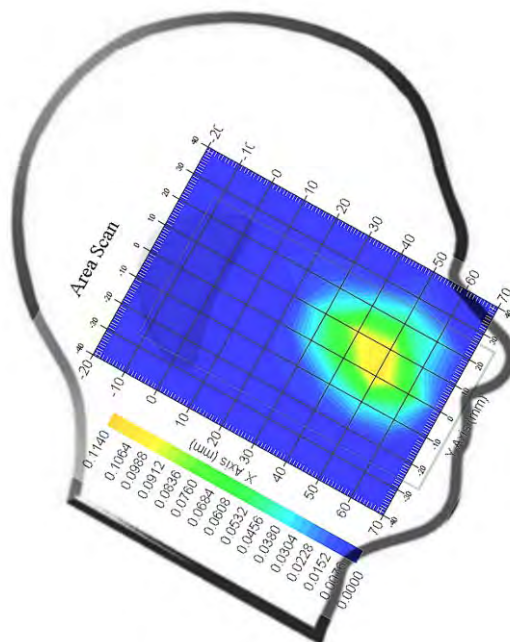

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Right Head Cheek(1850.2 MHz Low Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 10x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.005 W/kg
 Power Drift-Finish : 0.005 W/kg
 Power Drift (%) : -0.877

Tissue Data


Type : Head
 Frequency : 1850.2 MHz
 Epsilon : 39.87 F/m
 Sigma : 1.35 S/m
 Density : 1000.00 kg/cu. M

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 8
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.139 W/kg
 10 gram SAR value : 0.067 W/kg
 Area Scan Peak SAR : 0.174 W/kg
 Zoom Scan Peak SAR : 0.326 W/kg

Plot 9#

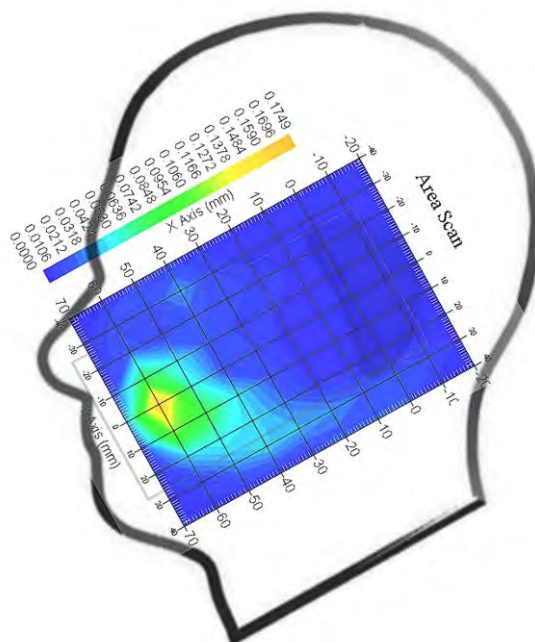

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Right Head Cheek(1880.0 MHz Middle Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 10x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.008 W/kg
 Power Drift-Finish : 0.008 W/kg
 Power Drift (%) : -1.877

Tissue Data


Type : Head
 Frequency : 1880.0 MHz
 Epsilon : 39.97 F/m
 Sigma : 1.38 S/m
 Density : 1000.00 kg/cu. M

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 8
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.158 W/kg
 10 gram SAR value : 0.087 W/kg
 Area Scan Peak SAR : 0.231 W/kg
 Zoom Scan Peak SAR : 0.386 W/kg

Plot 10#

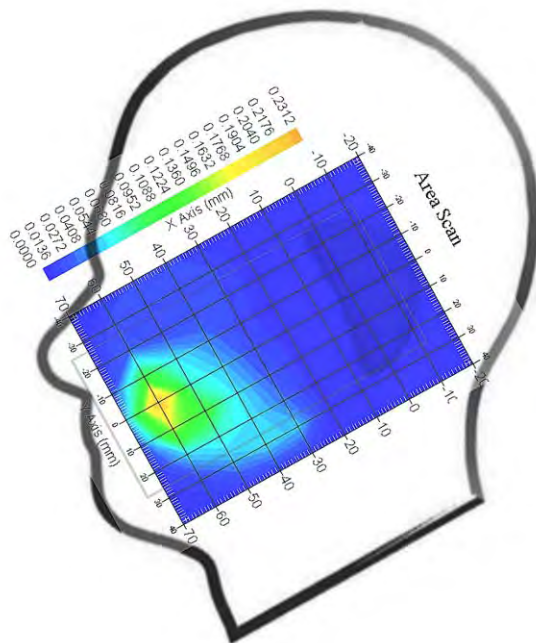

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Right Head Cheek(1909.8 MHz High Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.013 W/kg
 Power Drift-Finish : 0.013 W/kg
 Power Drift (%) : -0.777

Tissue Data


Type : Head
 Frequency : 1909.8 MHz
 Epsilon : 40.18 F/m
 Sigma : 1.41 S/m
 Density : 1000.00 kg/cu. M

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 8
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.151 W/kg
 10 gram SAR value : 0.077 W/kg
 Area Scan Peak SAR : 0.204 W/kg
 Zoom Scan Peak SAR : 0.326 W/kg

Plot 11#

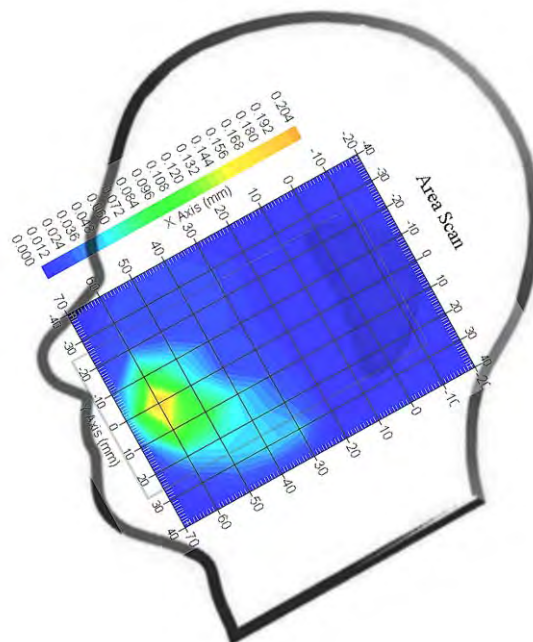

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Right Head 15° Tilt (1880.0 MHz Middle Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.012 W/kg
 Power Drift-Finish : 0.012 W/kg
 Power Drift (%) : -0.258

Tissue Data


Type : Head
 Frequency : 1880.0 MHz
 Epsilon : 39.97 F/m
 Sigma : 1.38 S/m
 Density : 1000.00 kg/cu. M

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 8
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.086 W/kg
 10 gram SAR value : 0.042 W/kg
 Area Scan Peak SAR : 0.101 W/kg
 Zoom Scan Peak SAR : 0.156 W/kg

Plot 12#

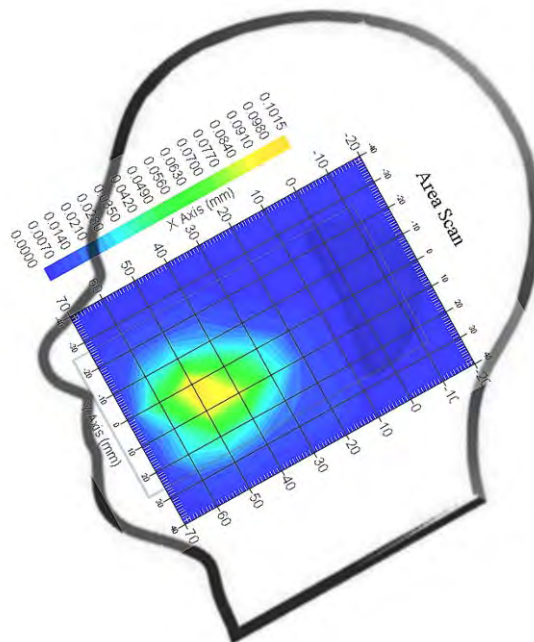

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA850; Left Head Cheek (836.6 MHz Middle Channel)

Measurement Data

Test mode : WCDMA850
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.006 W/kg
 Power Drift-Finish : 0.006 W/kg
 Power Drift (%) : 0.238

Tissue Data


Type : Head
 Frequency : 836.6 MHz
 Epsilon : 40.45 F/m
 Sigma : 0.88 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 1
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.156 W/kg
 10 gram SAR value : 0.098 W/kg
 Area Scan Peak SAR : 0.163 W/kg
 Zoom Scan Peak SAR : 0.252 W/kg

Plot 13#

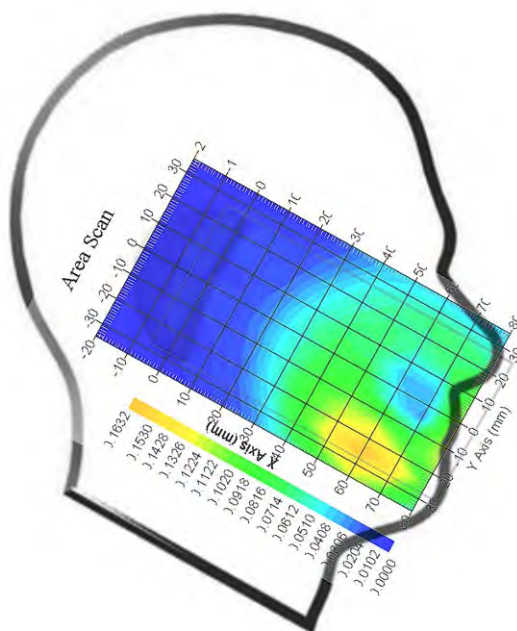

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA850; Left Head 15° Tilt (836.6 MHz Middle Channel)

Measurement Data

Test mode : WCDMA850
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.035 W/kg
 Power Drift-Finish : 0.034 W/kg
 Power Drift (%) : -2.557

Tissue Data


Type : Head
 Frequency : 836.6 MHz
 Epsilon : 40.45 F/m
 Sigma : 0.88 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 1
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.078 W/kg
 10 gram SAR value : 0.052 W/kg
 Area Scan Peak SAR : 0.083 W/kg
 Zoom Scan Peak SAR : 0.151 W/kg

Plot 14#

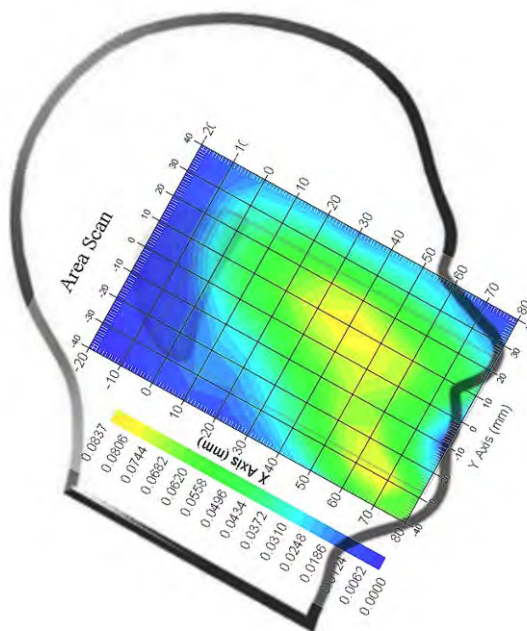

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA850; Right Head Cheek (836.6 MHz Middle Channel)

Measurement Data

Test mode : WCDMA850
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.007 W/kg
 Power Drift-Finish : 0.007 W/kg
 Power Drift (%) : 0.715

Tissue Data


Type : Head
 Frequency : 836.6 MHz
 Epsilon : 40.45 F/m
 Sigma : 0.88 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 1
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.174 W/kg
 10 gram SAR value : 0.097 W/kg
 Area Scan Peak SAR : 0.188 W/kg
 Zoom Scan Peak SAR : 0.234 W/kg

Plot 15#

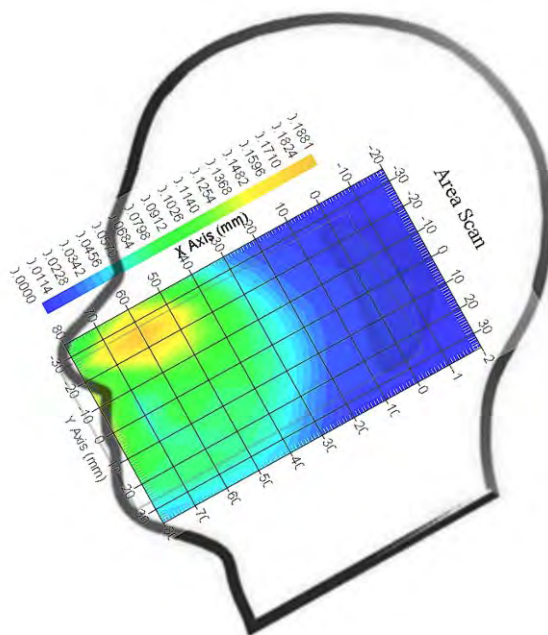

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA850; Right Head 15° Tilt (836.6 MHz Middle Channel)

Measurement Data

Test mode : WCDMA850
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.023 W/kg
 Power Drift-Finish : 0.024 W/kg
 Power Drift (%) : 4.325

Tissue Data


Type : Head
 Frequency : 836.6 MHz
 Epsilon : 40.45 F/m
 Sigma : 0.88 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 1
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.072 W/kg
 10 gram SAR value : 0.047 W/kg
 Area Scan Peak SAR : 0.075 W/kg
 Zoom Scan Peak SAR : 0.137 W/kg

Plot 16#

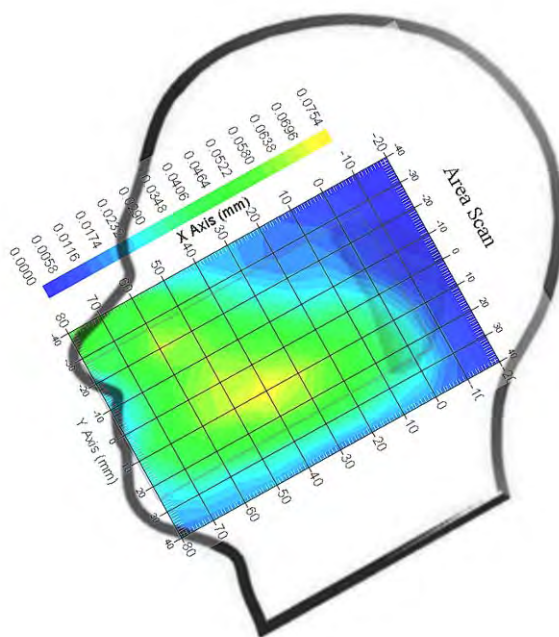

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA1900; Left Head Cheek (1880.0 MHz Middle Channel)

Measurement Data

Test mode : WCDMA1900
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.005 W/kg
 Power Drift-Finish : 0.005 W/kg
 Power Drift (%) : -0.128

Tissue Data


Type : Head
 Frequency : 1880.0 MHz
 Epsilon : 39.97 F/m
 Sigma : 1.38 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.184 W/kg
 10 gram SAR value : 0.091 W/kg
 Area Scan Peak SAR : 0.207 W/kg
 Zoom Scan Peak SAR : 0.382 W/kg

Plot 17#

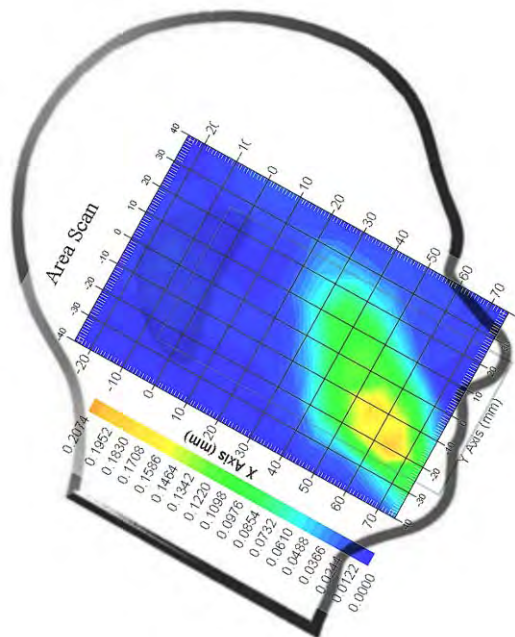

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA1900; Left Head 15° Tilt (1880.0 MHz Middle Channel)

Measurement Data

Test mode : WCDMA1900
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.005 W/kg
 Power Drift-Finish : 0.005 W/kg
 Power Drift (%) : 0.428

Tissue Data


Type : Head
 Frequency : 1880.0 MHz
 Epsilon : 39.97 F/m
 Sigma : 1.38 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.081 W/kg
 10 gram SAR value : 0.039 W/kg
 Area Scan Peak SAR : 0.105 W/kg
 Zoom Scan Peak SAR : 0.162 W/kg

Plot 18#

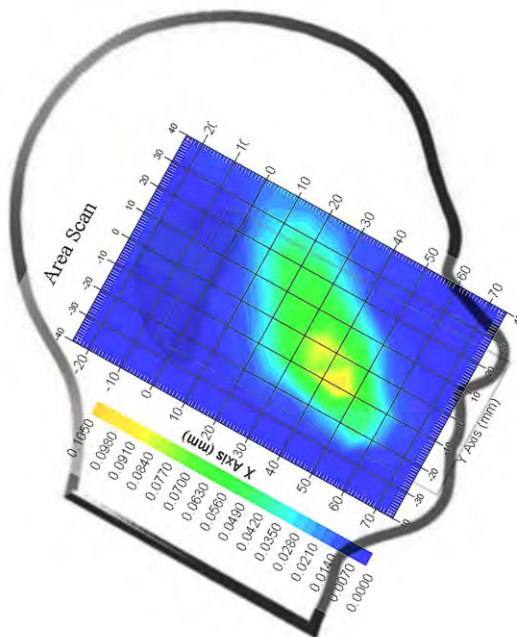

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA1900; Right Head Cheek (1880.0 MHz Middle Channel)

Measurement Data

Test mode : WCDMA1900
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.009 W/kg
 Power Drift-Finish : 0.009 W/kg
 Power Drift (%) : 0.897

Tissue Data


Type : Head
 Frequency : 1880.0 MHz
 Epsilon : 39.97 F/m
 Sigma : 1.38 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.149 W/kg
 10 gram SAR value : 0.073 W/kg
 Area Scan Peak SAR : 0.188 W/kg
 Zoom Scan Peak SAR : 0.324 W/kg

Plot 19#

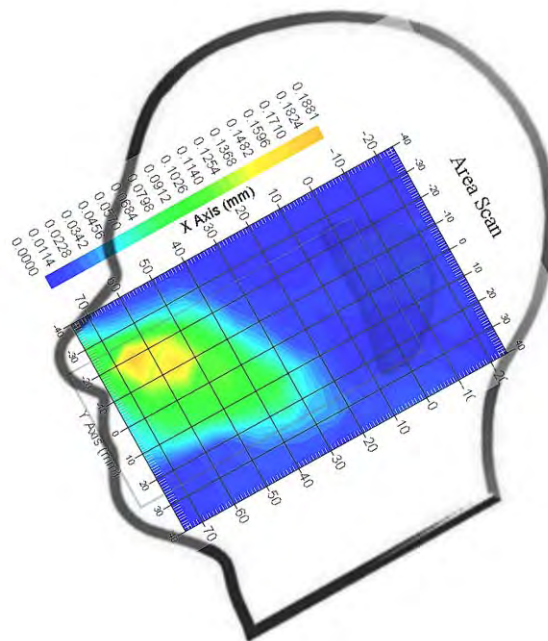

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA1900; Right Head 15° Tilt (1880.0 MHz Middle Channel)

Measurement Data

Test mode : WCDMA1900
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.001 W/kg
 Power Drift-Finish : 0.001 W/kg
 Power Drift (%) : 0.205

Tissue Data


Type : Head
 Frequency : 1880.0 MHz
 Epsilon : 39.97 F/m
 Sigma : 1.38 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.088 W/kg
 10 gram SAR value : 0.046 W/kg
 Area Scan Peak SAR : 0.114 W/kg
 Zoom Scan Peak SAR : 0.158 W/kg

Plot 20#

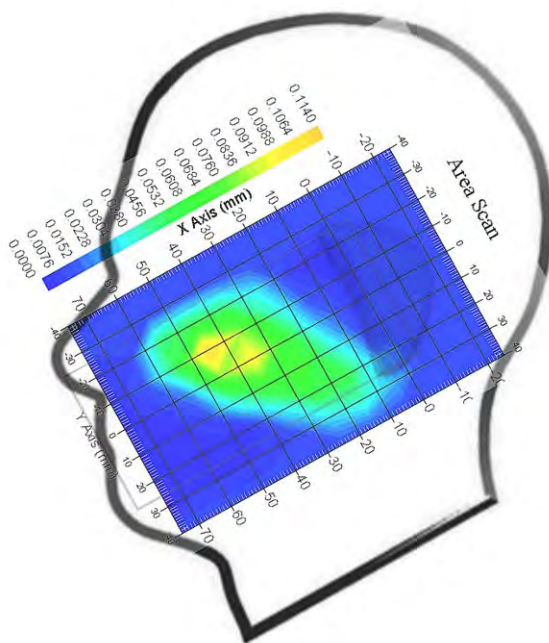

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 2; Left Head Cheek (1900.0 MHz High Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.087 W/kg
 Power Drift-Finish : 0.088 W/kg
 Power Drift (%) : 1.143

Tissue Data


Type : Head
 Frequency : 1900.0 MHz
 Epsilon : 39.99 F/m
 Sigma : 1.39 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.203 W/kg
 10 gram SAR value : 0.109 W/kg
 Area Scan Peak SAR : 0.217 W/kg
 Zoom Scan Peak SAR : 0.325 W/kg

Plot 21#

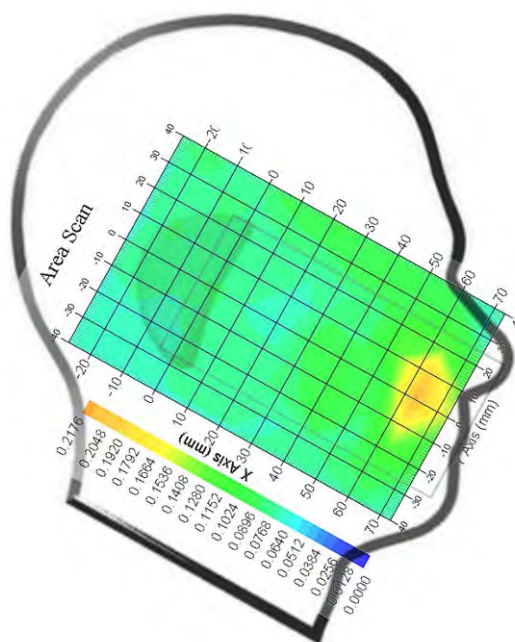

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 2; Left Head Cheek (1900.0 MHz High Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.078 W/kg
 Power Drift-Finish : 0.079 W/kg
 Power Drift (%) : 1.282

Tissue Data


Type : Head
 Frequency : 1900.0 MHz
 Epsilon : 39.99 F/m
 Sigma : 1.39 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.189 W/kg
 10 gram SAR value : 0.103 W/kg
 Area Scan Peak SAR : 0.197 W/kg
 Zoom Scan Peak SAR : 0.259 W/kg

Plot 22#

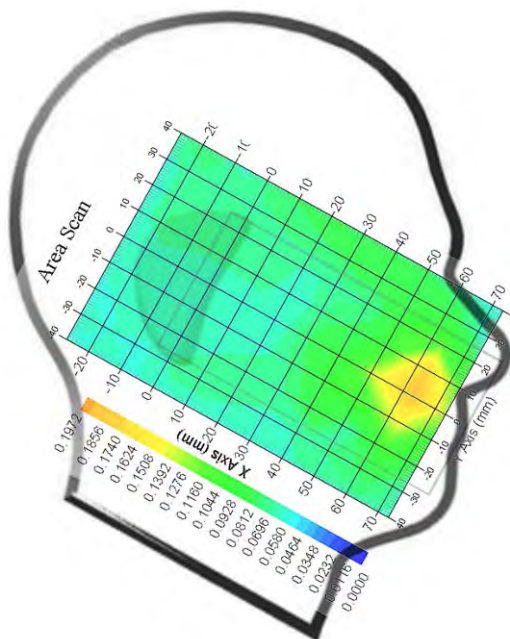

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 2; Left Head Tilt (1900.0 MHz High Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.047 W/kg
 Power Drift-Finish : 0.049 W/kg
 Power Drift (%) : 4.255

Tissue Data


Type : Head
 Frequency : 1900.0 MHz
 Epsilon : 39.99 F/m
 Sigma : 1.39 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.107 W/kg
 10 gram SAR value : 0.067 W/kg
 Area Scan Peak SAR : 0.117 W/kg
 Zoom Scan Peak SAR : 0.257 W/kg

Plot 23#

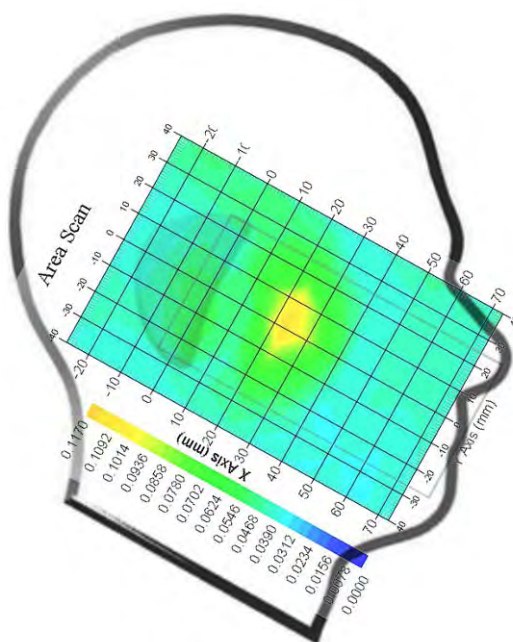

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 2; Left Head Tilt (1900.0 MHz High Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.055 W/kg
 Power Drift-Finish : 0.054 W/kg
 Power Drift (%) : -1.818

Tissue Data


Type : Head
 Frequency : 1900.0 MHz
 Epsilon : 39.99 F/m
 Sigma : 1.39 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.095 W/kg
 10 gram SAR value : 0.076 W/kg
 Area Scan Peak SAR : 0.101 W/kg
 Zoom Scan Peak SAR : 0.209 W/kg

Plot 24#

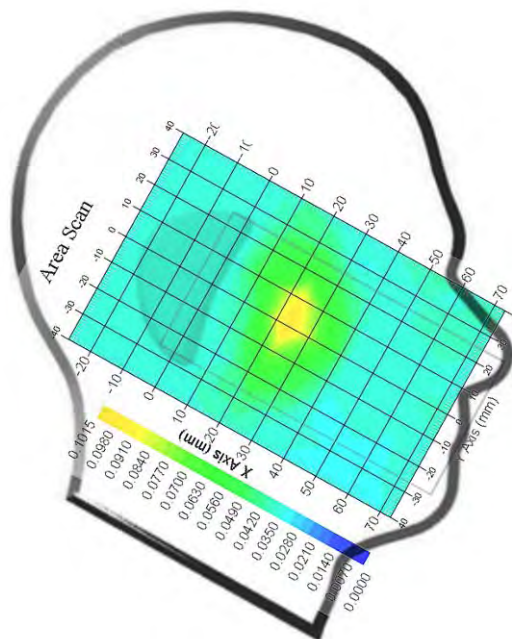

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 2; Right Head Cheek (1900.0 MHz High Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.066 W/kg
 Power Drift-Finish : 0.067 W/kg
 Power Drift (%) : 1.322

Tissue Data


Type : Head
 Frequency : 1900.0 MHz
 Epsilon : 39.99 F/m
 Sigma : 1.39 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.177 W/kg
 10 gram SAR value : 0.082 W/kg
 Area Scan Peak SAR : 0.204 W/kg
 Zoom Scan Peak SAR : 0.272 W/kg

Plot 25#

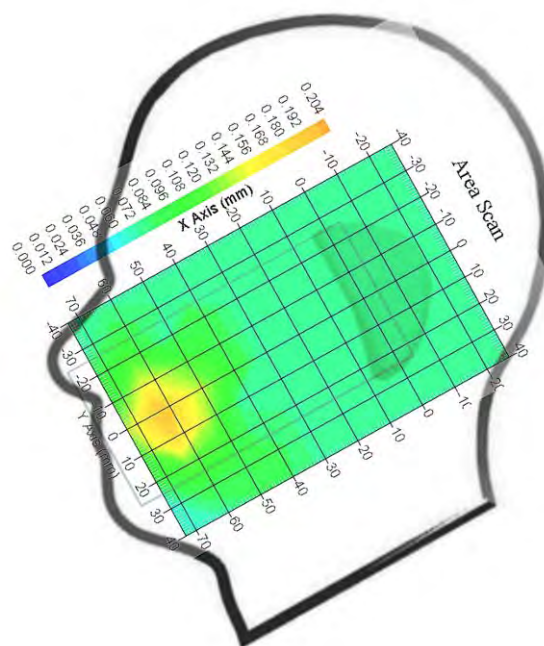

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 2; Right Head Cheek (1900.0 MHz High Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.039 W/kg
 Power Drift-Finish : 0.038 W/kg
 Power Drift (%) : -2.564

Tissue Data


Type : Head
 Frequency : 1900.0 MHz
 Epsilon : 39.99 F/m
 Sigma : 1.39 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.161 W/kg
 10 gram SAR value : 0.096 W/kg
 Area Scan Peak SAR : 0.174 W/kg
 Zoom Scan Peak SAR : 0.227 W/kg

Plot 26#

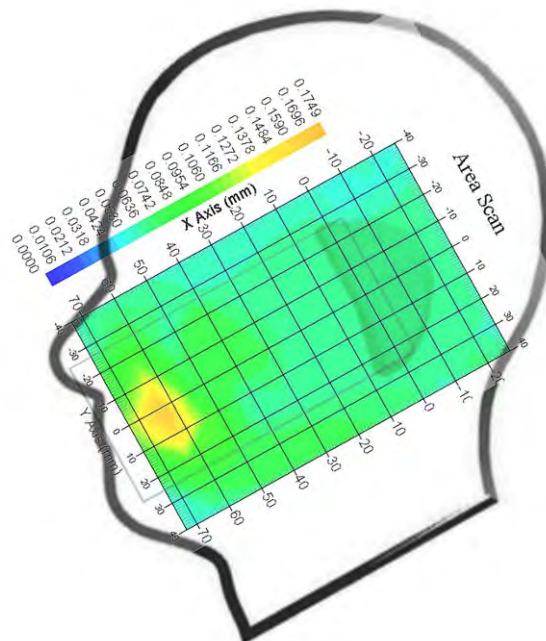

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 2; Right Head Tilt (1900.0 MHz High Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.047 W/kg
 Power Drift-Finish : 0.048 W/kg
 Power Drift (%) : 2.128

Tissue Data


Type : Head
 Frequency : 1900.0 MHz
 Epsilon : 39.99 F/m
 Sigma : 1.39 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.097 W/kg
 10 gram SAR value : 0.066 W/kg
 Area Scan Peak SAR : 0.098 W/kg
 Zoom Scan Peak SAR : 0.172 W/kg

Plot 27#

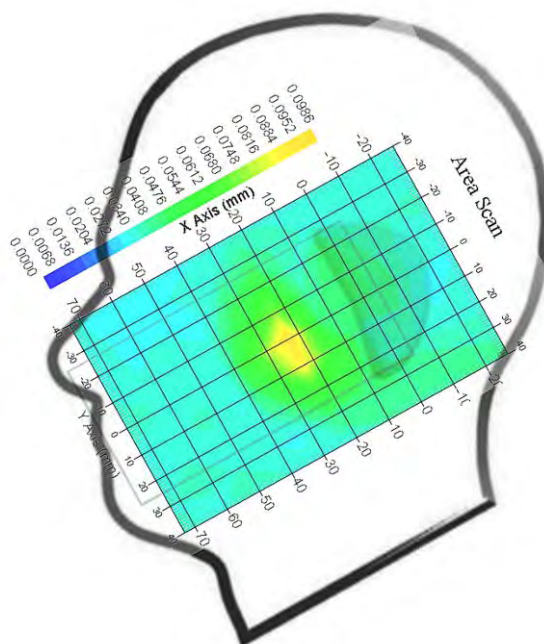

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 2; Right Head Tilt (1900.0 MHz High Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.065 W/kg
 Power Drift-Finish : 0.067 W/kg
 Power Drift (%) : 3.077

Tissue Data


Type : Head
 Frequency : 1900.0 MHz
 Epsilon : 39.99 F/m
 Sigma : 1.39 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.087 W/kg
 10 gram SAR value : 0.057 W/kg
 Area Scan Peak SAR : 0.089 W/kg
 Zoom Scan Peak SAR : 0.122 W/kg

Plot 28#

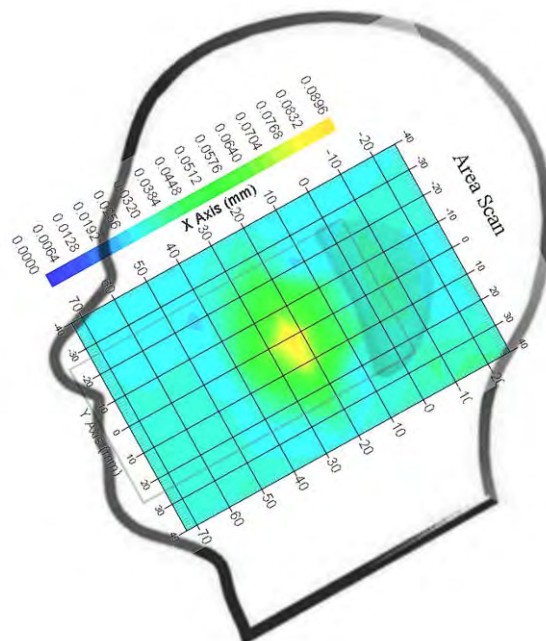

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 4; Left Head Cheek (1732.5 MHz Middle Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.085 W/kg
 Power Drift-Finish : 0.086 W/kg
 Power Drift (%) : 1.173

Tissue Data


Type : Head
 Frequency : 1732.5 MHz
 Epsilon : 39.65 F/m
 Sigma : 1.33 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1750
 Duty Cycle Factor : 1
 Conversion Factor : 5.4
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.147 W/kg
 10 gram SAR value : 0.083 W/kg
 Area Scan Peak SAR : 0.153 W/kg
 Zoom Scan Peak SAR : 0.265 W/kg

Plot 29#

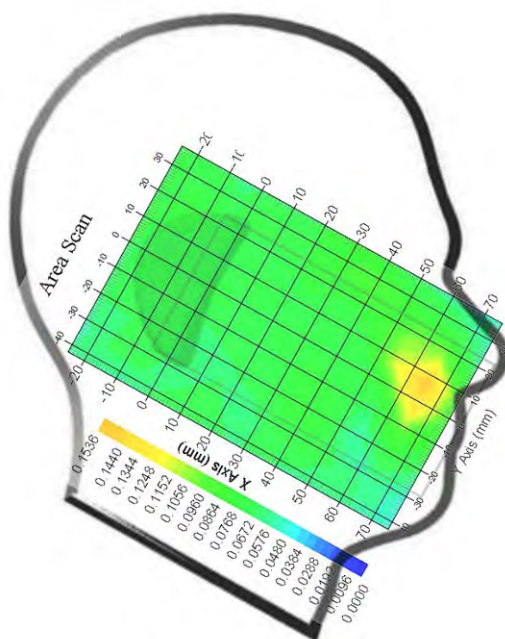

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 4; Left Head Cheek (1732.5 MHz Middle Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.082 W/kg
 Power Drift-Finish : 0.079 W/kg
 Power Drift (%) : -3.659

Tissue Data


Type : Head
 Frequency : 1732.5 MHz
 Epsilon : 39.65 F/m
 Sigma : 1.33 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1750
 Duty Cycle Factor : 1
 Conversion Factor : 5.4
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.139 W/kg
 10 gram SAR value : 0.084 W/kg
 Area Scan Peak SAR : 0.147 W/kg
 Zoom Scan Peak SAR : 0.259 W/kg

Plot 30#

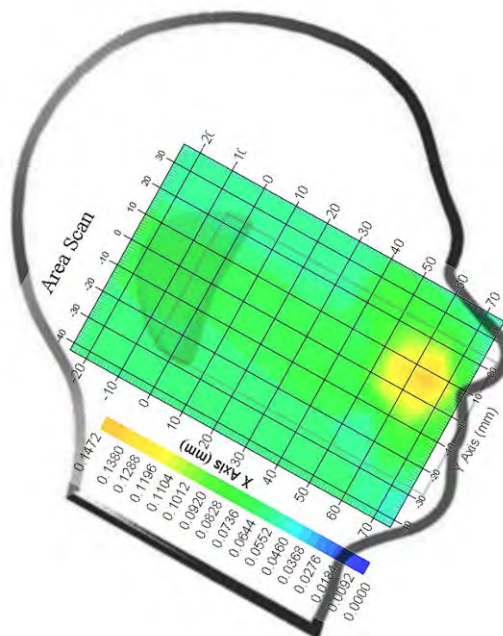

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 4; Left Head Tilt (1732.5 MHz Middle Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.015 W/kg
 Power Drift-Finish : 0.015 W/kg
 Power Drift (%) : 0.856

Tissue Data


Type : Head
 Frequency : 1732.5 MHz
 Epsilon : 39.65 F/m
 Sigma : 1.33 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1750
 Duty Cycle Factor : 1
 Conversion Factor : 5.4
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.089 W/kg
 10 gram SAR value : 0.059 W/kg
 Area Scan Peak SAR : 0.095 W/kg
 Zoom Scan Peak SAR : 0.152 W/kg

Plot 31#

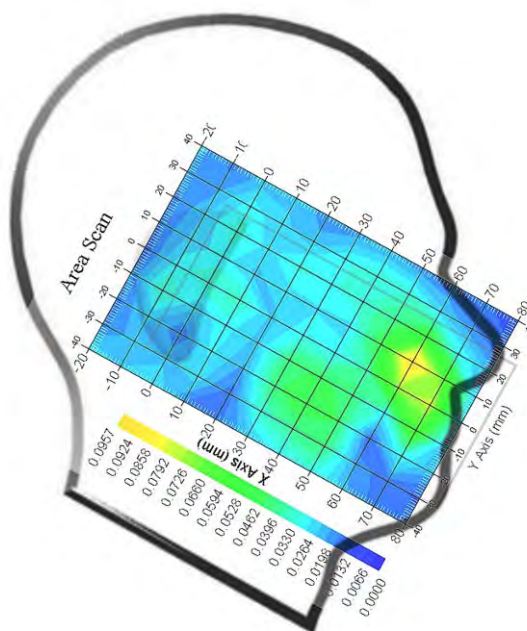

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 4; Left Head Tilt (1732.5 MHz Middle Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.025 W/kg
 Power Drift-Finish : 0.026 W/kg
 Power Drift (%) : 4.215

Tissue Data


Type : Head
 Frequency : 1732.5 MHz
 Epsilon : 39.65 F/m
 Sigma : 1.33 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1750
 Duty Cycle Factor : 1
 Conversion Factor : 5.4
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.075 W/kg
 10 gram SAR value : 0.053 W/kg
 Area Scan Peak SAR : 0.083 W/kg
 Zoom Scan Peak SAR : 0.157 W/kg

Plot 32#

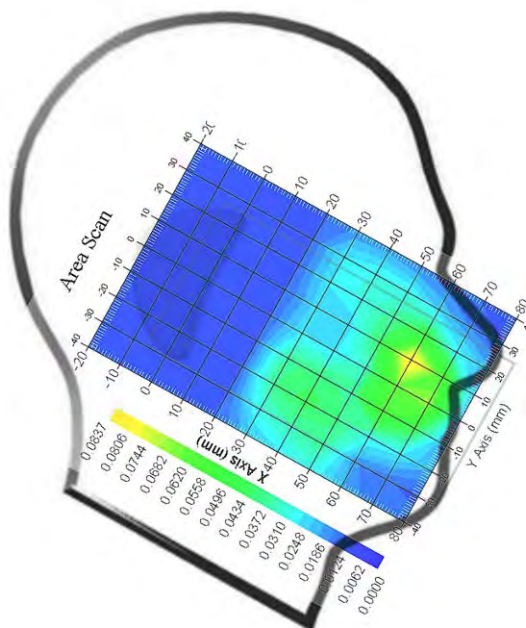

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 4; Right Head Cheek (1732.5 MHz Middle Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.075 W/kg
 Power Drift-Finish : 0.076 W/kg
 Power Drift (%) : 1.332

Tissue Data


Type : Head
 Frequency : 1732.5 MHz
 Epsilon : 39.65 F/m
 Sigma : 1.33 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1750
 Duty Cycle Factor : 1
 Conversion Factor : 5.4
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.132 W/kg
 10 gram SAR value : 0.087 W/kg
 Area Scan Peak SAR : 0.153 W/kg
 Zoom Scan Peak SAR : 0.272 W/kg

Plot 33#

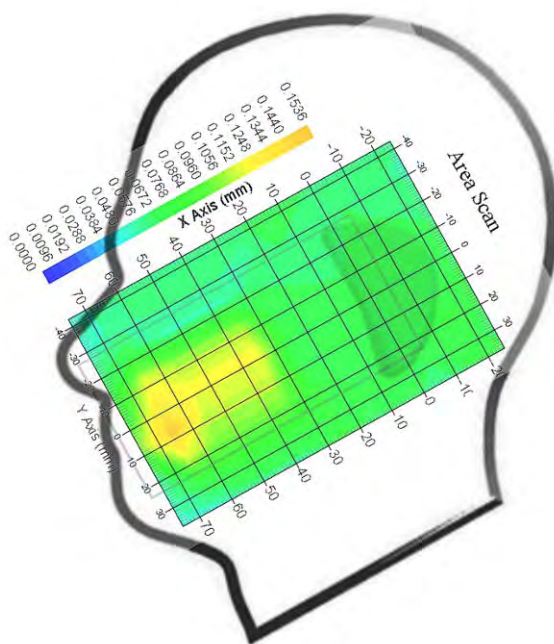

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 4; Right Head Cheek (1732.5 MHz Middle Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.065 W/kg
 Power Drift-Finish : 0.064 W/kg
 Power Drift (%) : -1.538

Tissue Data


Type : Head
 Frequency : 1732.5 MHz
 Epsilon : 39.65 F/m
 Sigma : 1.33 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1750
 Duty Cycle Factor : 1
 Conversion Factor : 5.4
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.124 W/kg
 10 gram SAR value : 0.079 W/kg
 Area Scan Peak SAR : 0.147 W/kg
 Zoom Scan Peak SAR : 0.248 W/kg

Plot 34#

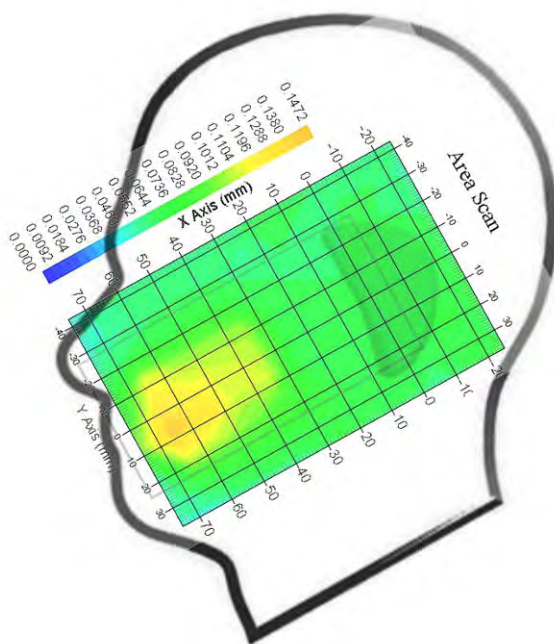

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 4; Right Head Tilt (1732.5 MHz Middle Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.023 W/kg
 Power Drift-Finish : 0.023 W/kg
 Power Drift (%) : -0.789

Tissue Data


Type : Head
 Frequency : 1732.5 MHz
 Epsilon : 39.65 F/m
 Sigma : 1.33 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1750
 Duty Cycle Factor : 1
 Conversion Factor : 5.4
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.075 W/kg
 10 gram SAR value : 0.046 W/kg
 Area Scan Peak SAR : 0.101 W/kg
 Zoom Scan Peak SAR : 0.122 W/kg

Plot 35#

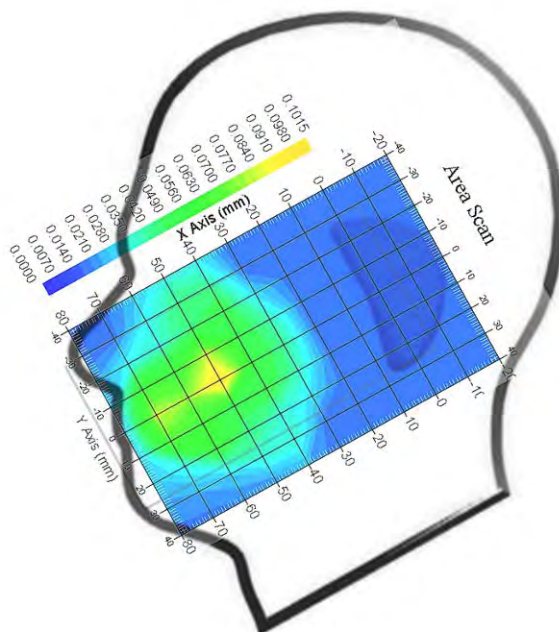

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 4; Right Head Tilt (1732.5 MHz Middle Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.022 W/kg
 Power Drift-Finish : 0.022 W/kg
 Power Drift (%) : 0.335

Tissue Data


Type : Head
 Frequency : 1732.5 MHz
 Epsilon : 39.65 F/m
 Sigma : 1.33 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1750
 Duty Cycle Factor : 1
 Conversion Factor : 5.4
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.068 W/kg
 10 gram SAR value : 0.036 W/kg
 Area Scan Peak SAR : 0.086 W/kg
 Zoom Scan Peak SAR : 0.122 W/kg

Plot 36#

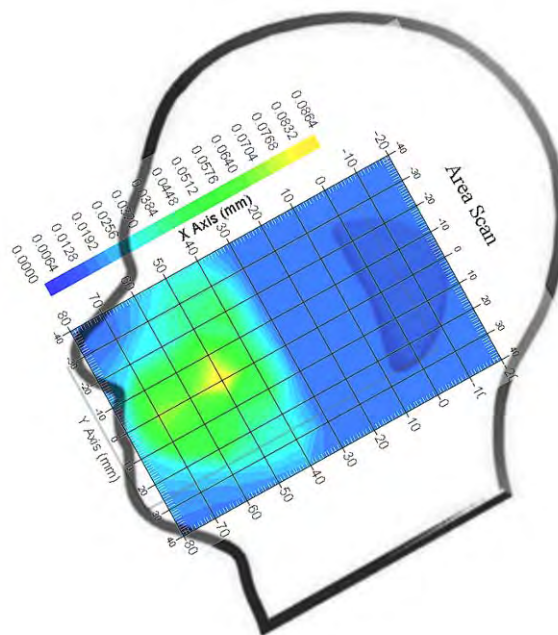

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 17; Left Head Cheek (710.0 MHz Middle Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.125 W/kg
 Power Drift-Finish : 0.129 W/kg
 Power Drift (%) : 3.158

Tissue Data


Type : Head
 Frequency : 710.0 MHz
 Epsilon : 41.15 F/m
 Sigma : 0.86 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 750
 Duty Cycle Factor : 1
 Conversion Factor : 6.0
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.197 W/kg
 10 gram SAR value : 0.127 W/kg
 Area Scan Peak SAR : 0.221 W/kg
 Zoom Scan Peak SAR : 0.375 W/kg

Plot 37#

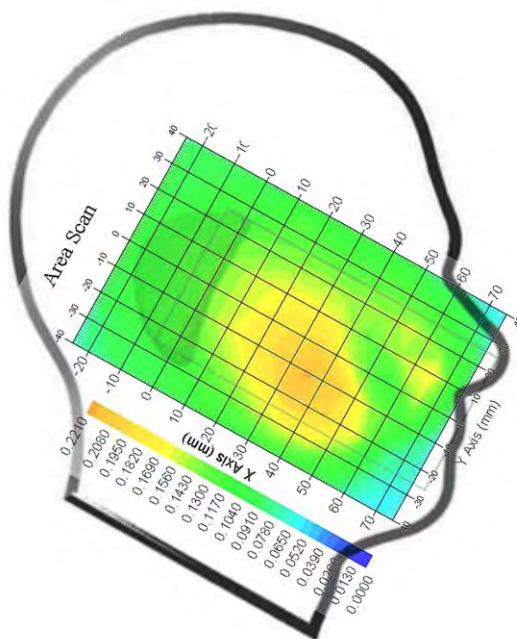

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 17; Left Head Cheek (710.0 MHz Middle Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.089 W/kg
 Power Drift-Finish : 0.088 W/kg
 Power Drift (%) : -1.124

Tissue Data


Type : Head
 Frequency : 710.0 MHz
 Epsilon : 41.15 F/m
 Sigma : 0.86 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 750
 Duty Cycle Factor : 1
 Conversion Factor : 6.0
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.173 W/kg
 10 gram SAR value : 0.099 W/kg
 Area Scan Peak SAR : 0.188 W/kg
 Zoom Scan Peak SAR : 0.229 W/kg

Plot 38#

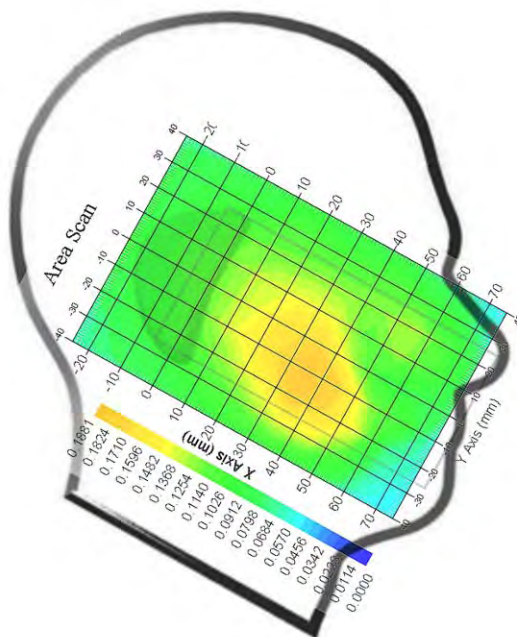

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 17; Left Head Tilt (710.0 MHz Middle Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 10x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.092 W/kg
 Power Drift-Finish : 0.091 W/kg
 Power Drift (%) : -1.087

Tissue Data


Type : Head
 Frequency : 710.0 MHz
 Epsilon : 41.15 F/m
 Sigma : 0.86 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 750
 Duty Cycle Factor : 1
 Conversion Factor : 6.0
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.107 W/kg
 10 gram SAR value : 0.073 W/kg
 Area Scan Peak SAR : 0.111 W/kg
 Zoom Scan Peak SAR : 0.227 W/kg

Plot 39#

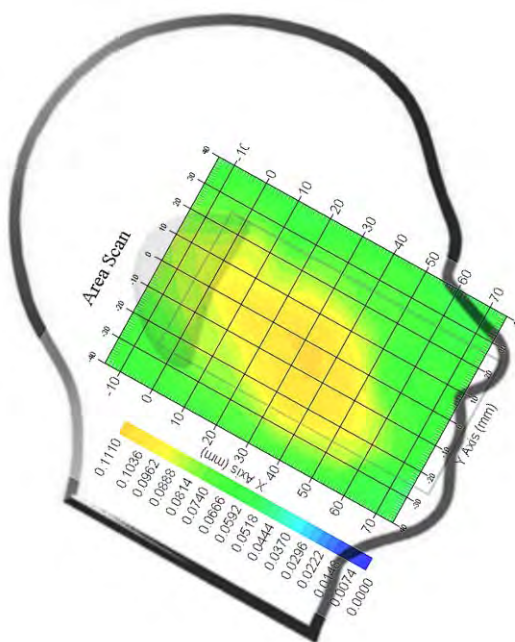

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 17; Left Head Tilt (710.0 MHz Middle Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 10x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.082 W/kg
 Power Drift-Finish : 0.083 W/kg
 Power Drift (%) : 1.223

Tissue Data


Type : Head
 Frequency : 710.0 MHz
 Epsilon : 41.15 F/m
 Sigma : 0.86 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 750
 Duty Cycle Factor : 1
 Conversion Factor : 6.0
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.096 W/kg
 10 gram SAR value : 0.057 W/kg
 Area Scan Peak SAR : 0.098 W/kg
 Zoom Scan Peak SAR : 0.149 W/kg

Plot 40#

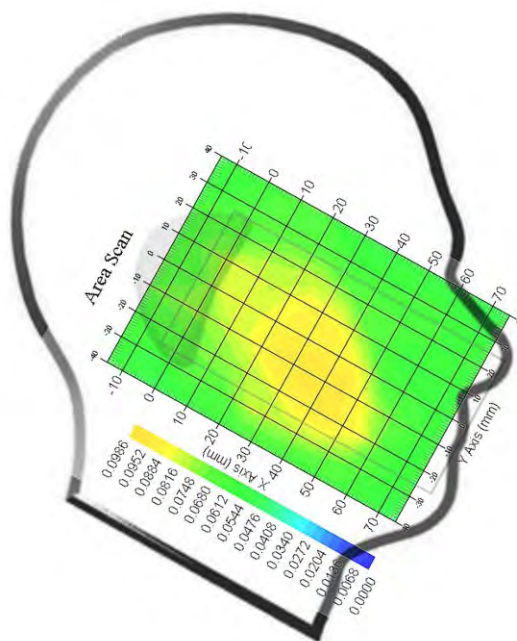

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 17; Right Head Cheek (710.0 MHz Middle Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.099 W/kg
 Power Drift-Finish : 0.102 W/kg
 Power Drift (%) : 3.025

Tissue Data


Type : Head
 Frequency : 710.0 MHz
 Epsilon : 41.15 F/m
 Sigma : 0.86 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 750
 Duty Cycle Factor : 1
 Conversion Factor : 6.0
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.167 W/kg
 10 gram SAR value : 0.099 W/kg
 Area Scan Peak SAR : 0.193 W/kg
 Zoom Scan Peak SAR : 0.292 W/kg

Plot 41#

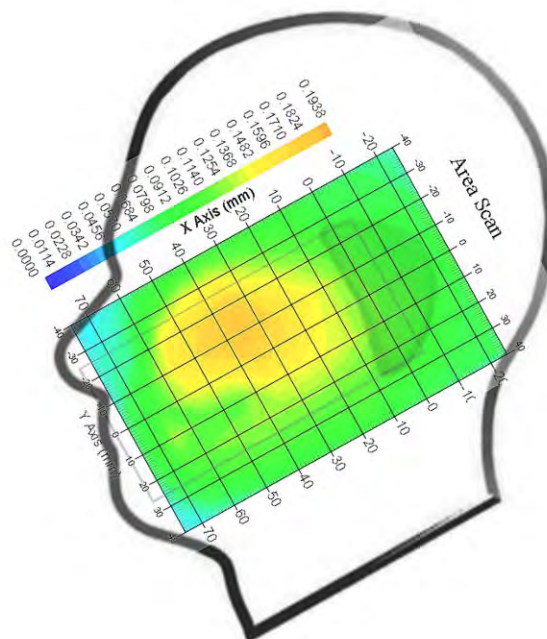

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 17; Right Head Cheek (710.0 MHz Middle Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.095 W/kg
 Power Drift-Finish : 0.09 W/kg
 Power Drift (%) : 1.053

Tissue Data


Type : Head
 Frequency : 710.0 MHz
 Epsilon : 41.15 F/m
 Sigma : 0.86 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 750
 Duty Cycle Factor : 1
 Conversion Factor : 6.0
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.158 W/kg
 10 gram SAR value : 0.089 W/kg
 Area Scan Peak SAR : 0.171 W/kg
 Zoom Scan Peak SAR : 0.258 W/kg

Plot 42#

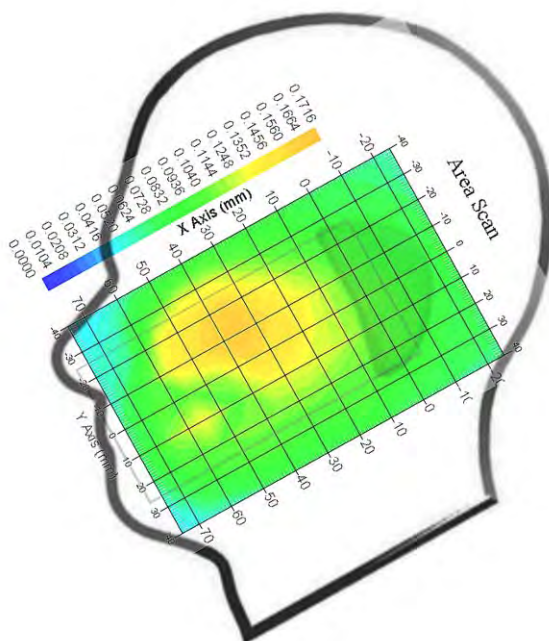

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 17; Right Head Tilt (710.0 MHz Middle Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 10x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.073 W/kg
 Power Drift-Finish : 0.072 W/kg
 Power Drift (%) : -1.370

Tissue Data


Type : Head
 Frequency : 710.0 MHz
 Epsilon : 41.15 F/m
 Sigma : 0.86 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 750
 Duty Cycle Factor : 1
 Conversion Factor : 6.0
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.081 W/kg
 10 gram SAR value : 0.053 W/kg
 Area Scan Peak SAR : 0.089 W/kg
 Zoom Scan Peak SAR : 0.152 W/kg

Plot 43#

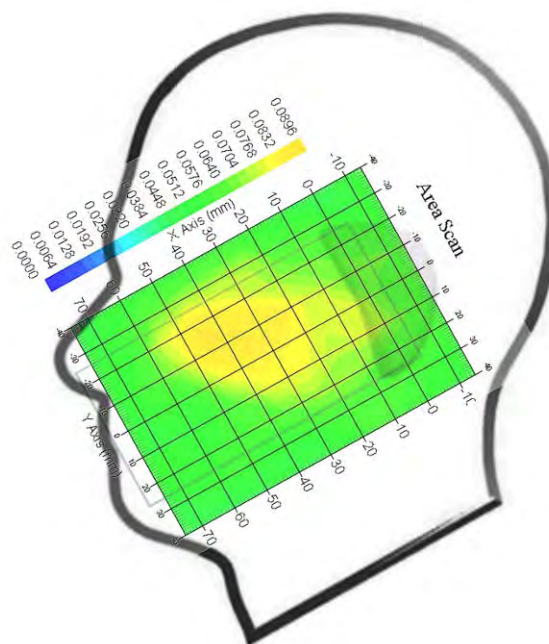

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 17; Right Head Tilt (710.0 MHz Middle Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 10x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.067 W/kg
 Power Drift-Finish : 0.068 W/kg
 Power Drift (%) : 1.493

Tissue Data


Type : Head
 Frequency : 710.0 MHz
 Epsilon : 41.15 F/m
 Sigma : 0.86 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 750
 Duty Cycle Factor : 1
 Conversion Factor : 6.0
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.085 W/kg
 10 gram SAR value : 0.062 W/kg
 Area Scan Peak SAR : 0.086 W/kg
 Zoom Scan Peak SAR : 0.132 W/kg

Plot 44#

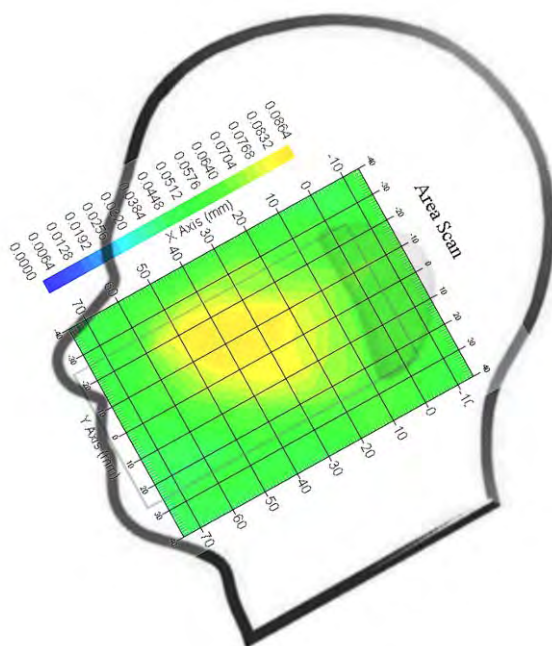

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Body-Back-Headset (836.6 MHz Middle Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 9x12x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.207 W/kg
 Power Drift-Finish : 0.208 W/kg
 Power Drift (%) : 0.483

Tissue Data


Type : Body
 Frequency : 836.6 MHz
 Epsilon : 54.32 F/m
 Sigma : 0.97 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 8
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.307 W/kg
 10 gram SAR value : 0.203 W/kg
 Area Scan Peak SAR : 0.331 W/kg
 Zoom Scan Peak SAR : 0.641 W/kg

Plot 45#

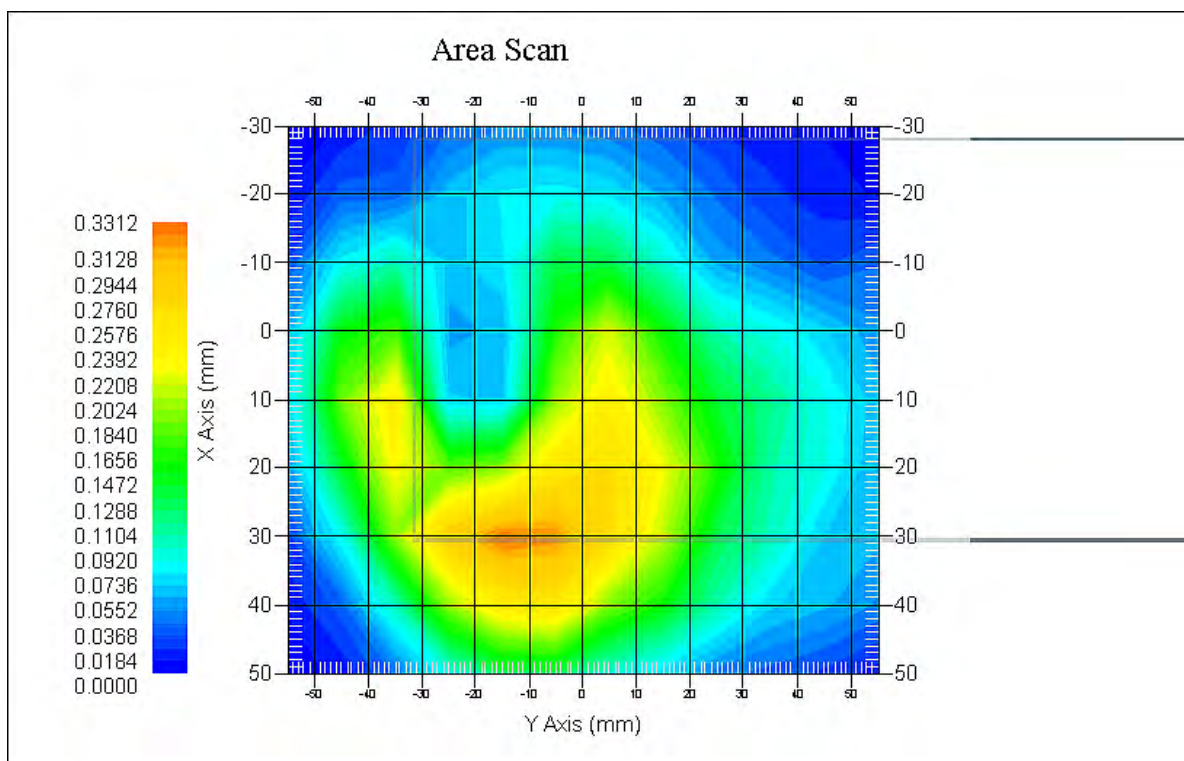

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Body-worn-Back (836.6 MHz Middle Channel)

Measurement Data

Test mode : GPRS
 Crest Factor : 2
 Scan Type : Complete
 Area Scan : 9x12x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.187 W/kg
 Power Drift-Finish : 0.189 W/kg
 Power Drift (%) : 1.073

Tissue Data


Type : Body
 Frequency : 836.6 MHz
 Epsilon : 54.32 F/m
 Sigma : 0.97 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 2
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.613 W/kg
 10 gram SAR value : 0.383 W/kg
 Area Scan Peak SAR : 0.661 W/kg
 Zoom Scan Peak SAR : 0.851 W/kg

Plot 46#

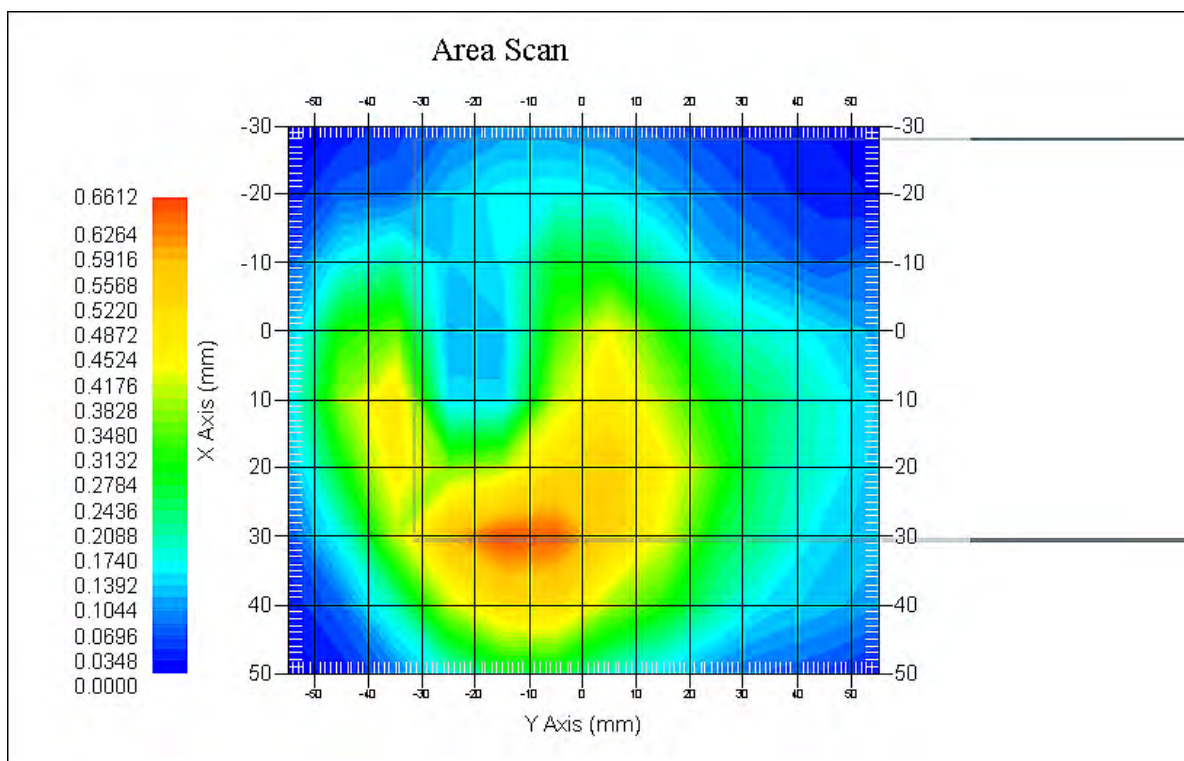

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Body-worn-Left (836.6 MHz Middle Channel)

Measurement Data

Test mode : GPRS
 Crest Factor : 2
 Scan Type : Complete
 Area Scan : 8x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.377 W/kg
 Power Drift-Finish : 0.379W/kg
 Power Drift (%) : 0.531

Tissue Data


Type : Body
 Frequency : 836.6 MHz
 Epsilon : 54.32 F/m
 Sigma : 0.97 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 2
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.389 W/kg
 10 gram SAR value : 0.213 W/kg
 Area Scan Peak SAR : 0.410 W/kg
 Zoom Scan Peak SAR : 0.687 W/kg

Plot 47#

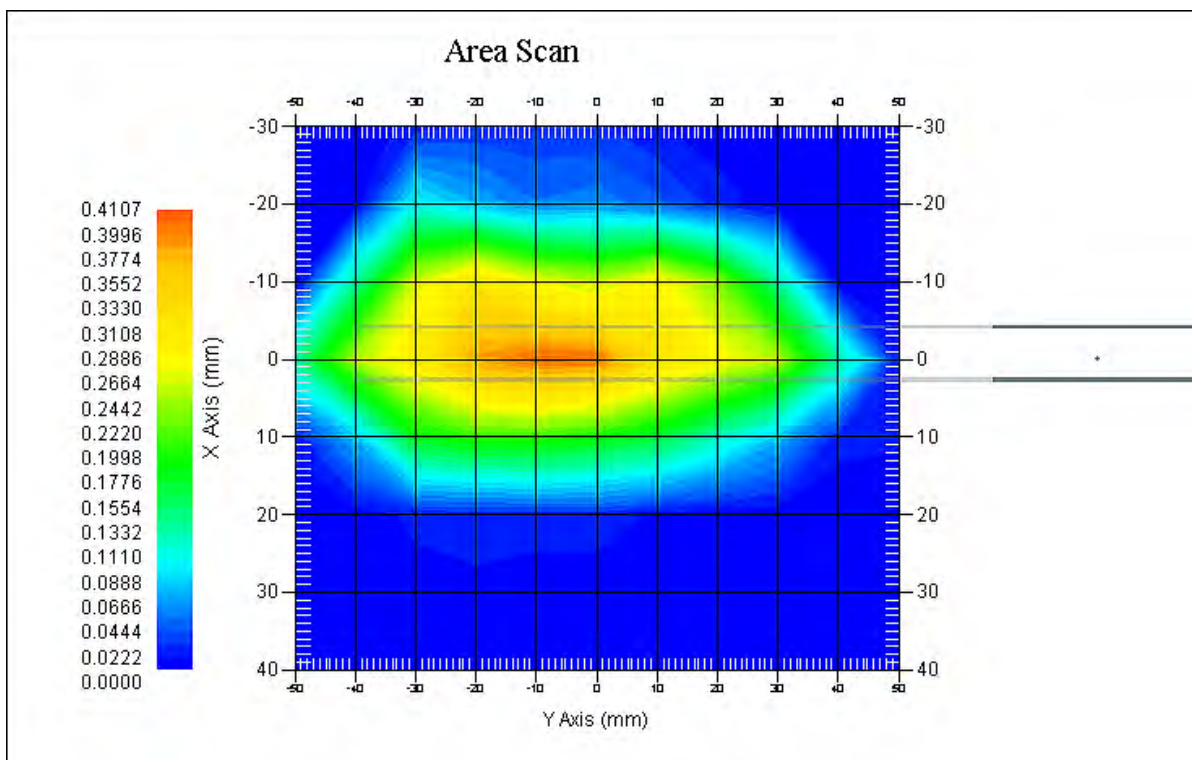

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Body-worn-Bottom (836.6 MHz Middle Channel)

Measurement Data

Test mode : GPRS
 Crest Factor : 2
 Scan Type : Complete
 Area Scan : 8x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.315 W/kg
 Power Drift-Finish : 0.318 W/kg
 Power Drift (%) : 0.952

Tissue Data


Type : Body
 Frequency : 836.6 MHz
 Epsilon : 54.32 F/m
 Sigma : 0.97 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 2
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.315 W/kg
 10 gram SAR value : 0.221 W/kg
 Area Scan Peak SAR : 0.320W/kg
 Zoom Scan Peak SAR : 0.575 W/kg

Plot 48#

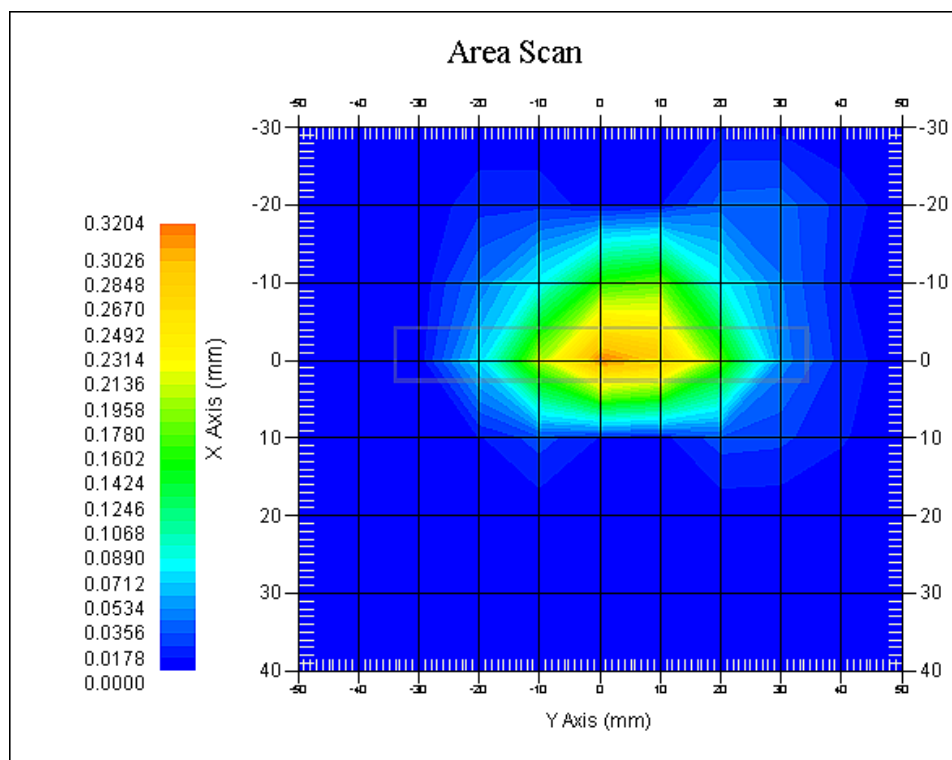

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Body-Back-Headset (1880.0 MHz Middle Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 9x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.003 W/kg
 Power Drift-Finish : 0.003 W/kg
 Power Drift (%) : -0.326

Tissue Data


Type : Body
 Frequency : 1880.0 MHz
 Epsilon : 52.69 F/m
 Sigma : 1.50 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 8
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.177 W/kg
 10 gram SAR value : 0.098 W/kg
 Area Scan Peak SAR : 0.214 W/kg
 Zoom Scan Peak SAR : 0.259 W/kg

Plot 49#

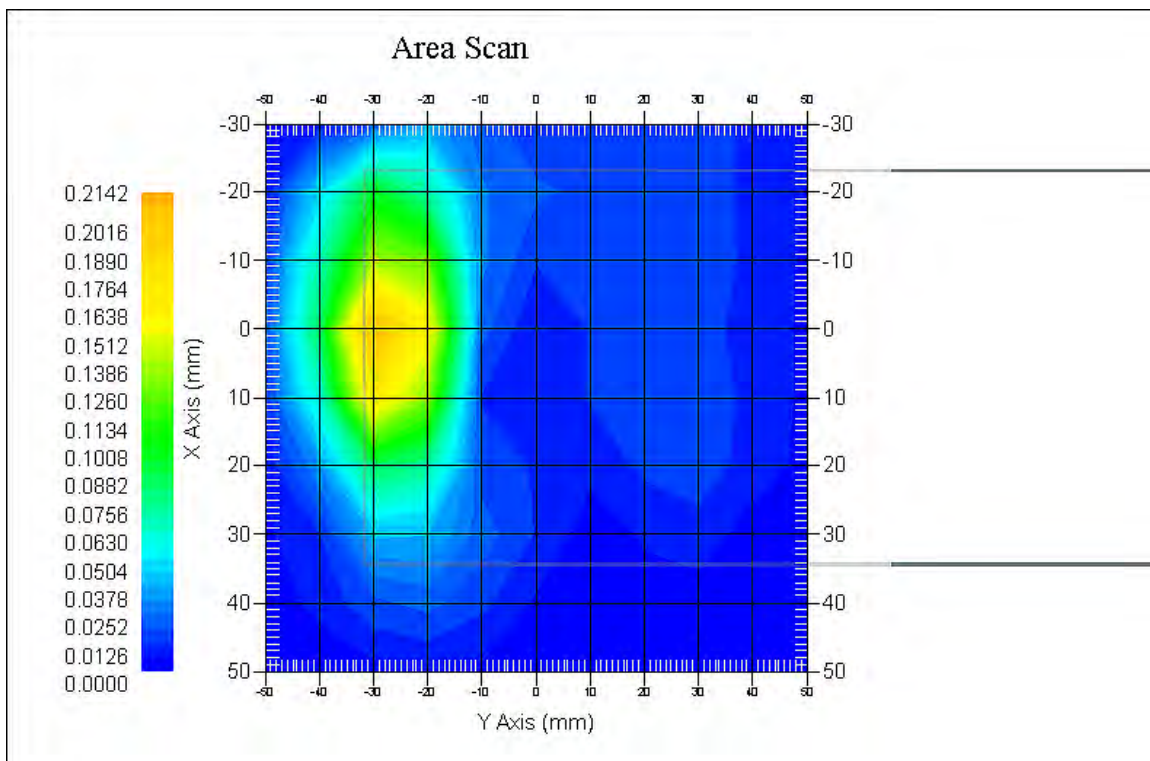

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Body-worn-Back (1850.2 MHz Low Channel)

Measurement Data

Test mode : GPRS
 Crest Factor : 2.67
 Scan Type : Complete
 Area Scan : 9x11x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.008 W/kg
 Power Drift-Finish : 0.008 W/kg
 Power Drift (%) : 0.425

Tissue Data


Type : Body
 Frequency : 1850.2 MHz
 Epsilon : 52.39F/m
 Sigma : 1.47 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 2.67
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.308 W/kg
 10 gram SAR value : 0.199 W/kg
 Area Scan Peak SAR : 0.334 W/kg
 Zoom Scan Peak SAR : 0.521 W/kg

Plot 50#

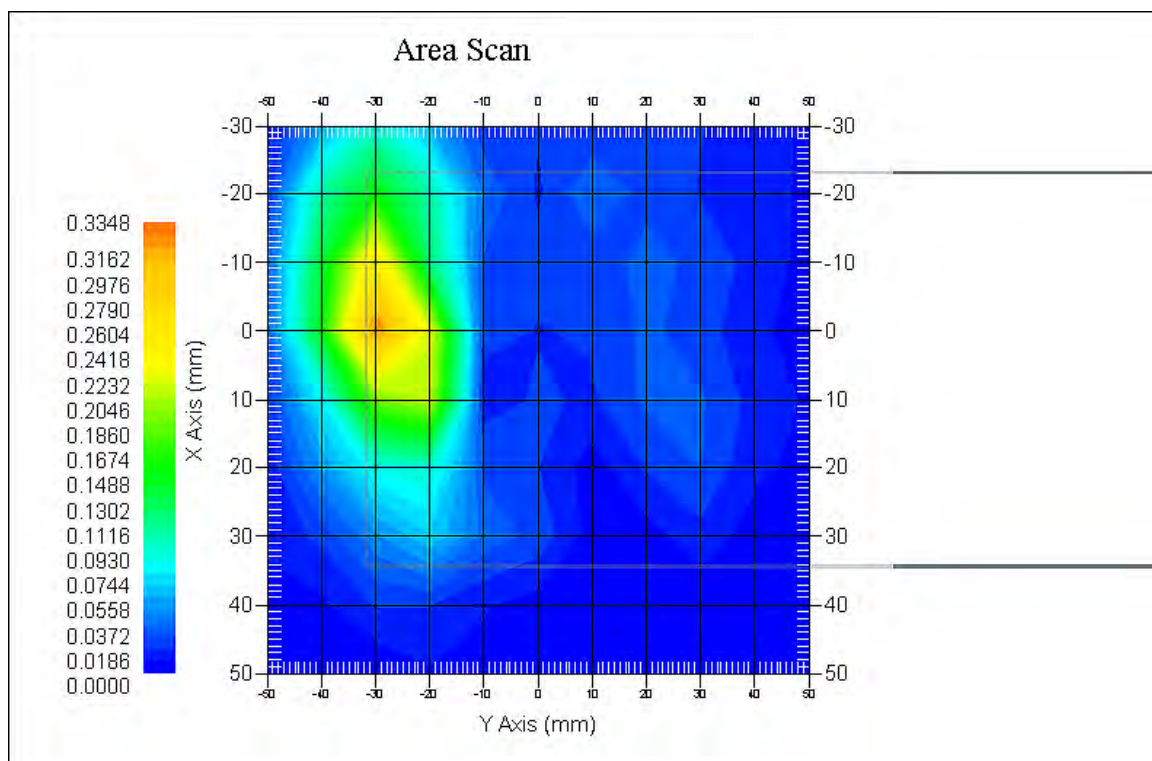

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Body-worn-Left (1850.2 MHz Low Channel)

Measurement Data

Test mode : GPRS
 Crest Factor : 2.67
 Scan Type : Complete
 Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.119 W/kg
 Power Drift-Finish : 0.120 W/kg
 Power Drift (%) : 0.833

Tissue Data


Type : Body
 Frequency : 1850.2 MHz
 Epsilon : 52.39 F/m
 Sigma : 1.47 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 2.67
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.112 W/kg
 10 gram SAR value : 0.075 W/kg
 Area Scan Peak SAR : 0.130 W/kg
 Zoom Scan Peak SAR : 0.425 W/kg

Plot 51#

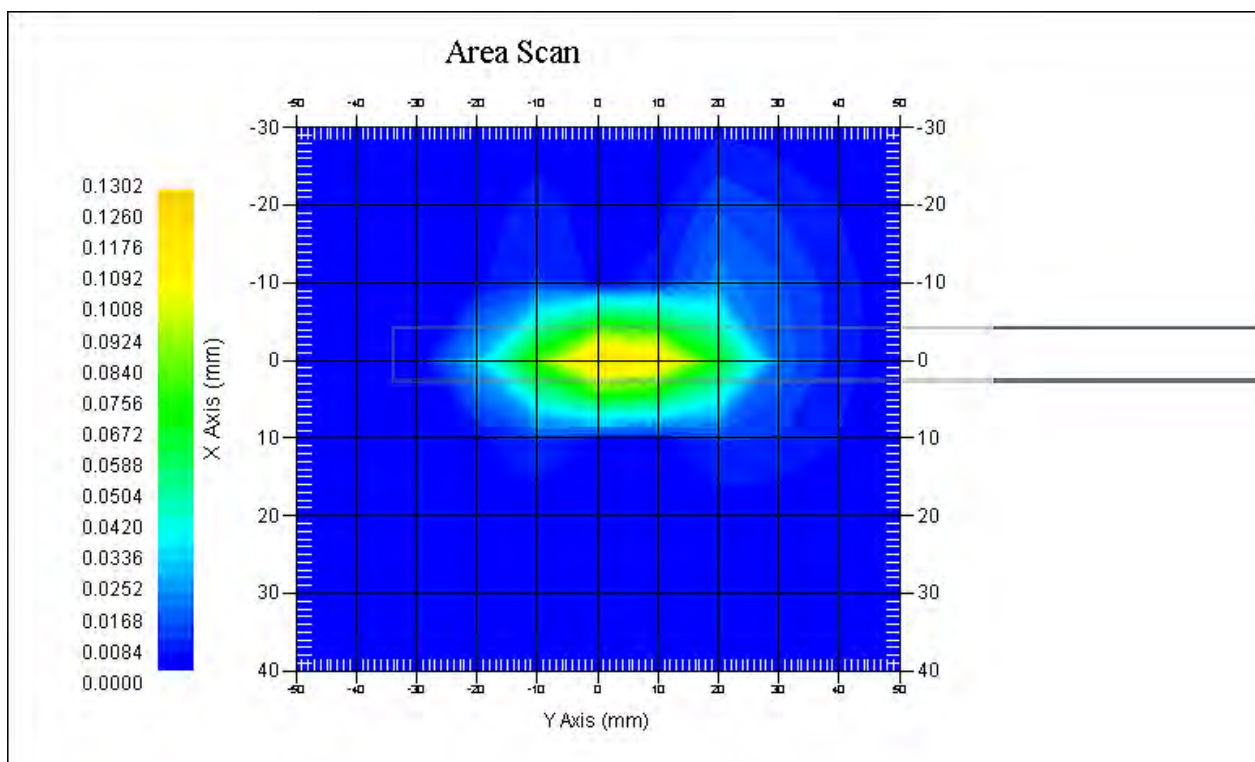

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Body-worn-Bottom (1850.2 MHz Low Channel)

Measurement Data

Test mode : GPRS
 Crest Factor : 2.67
 Scan Type : Complete
 Area Scan : 8x12x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.267 W/kg
 Power Drift-Finish : 0.266 W/kg
 Power Drift (%) : -0.375

Tissue Data


Type : Body
 Frequency : 1850.2 MHz
 Epsilon : 52.39 F/m
 Sigma : 1.47 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 2.67
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.275 W/kg
 10 gram SAR value : 0.166 W/kg
 Area Scan Peak SAR : 0.309 W/kg
 Zoom Scan Peak SAR : 0.453 W/kg

Plot 52#

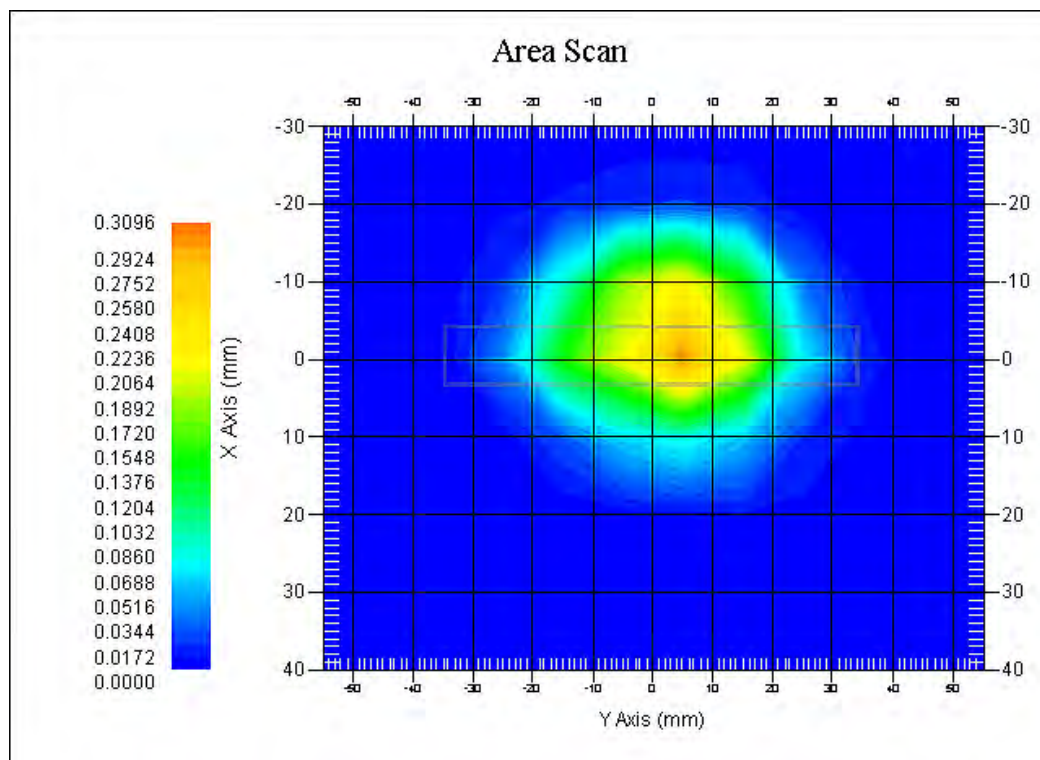

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA850; Body-Worn-Back (836.6MHz Middle Channel)

Measurement Data

Test mode : WCDMA850
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x12x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.155 W/kg
 Power Drift-Finish : 0.156 W/kg
 Power Drift (%) : 0.645

Tissue Data


Type : Body
 Frequency : 836.6 MHz
 Epsilon : 54.32 F/m
 Sigma : 0.97 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 1
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.233 W/kg
 10 gram SAR value : 0.175 W/kg
 Area Scan Peak SAR : 0.241 W/kg
 Zoom Scan Peak SAR : 0.653 W/kg

Plot 53#

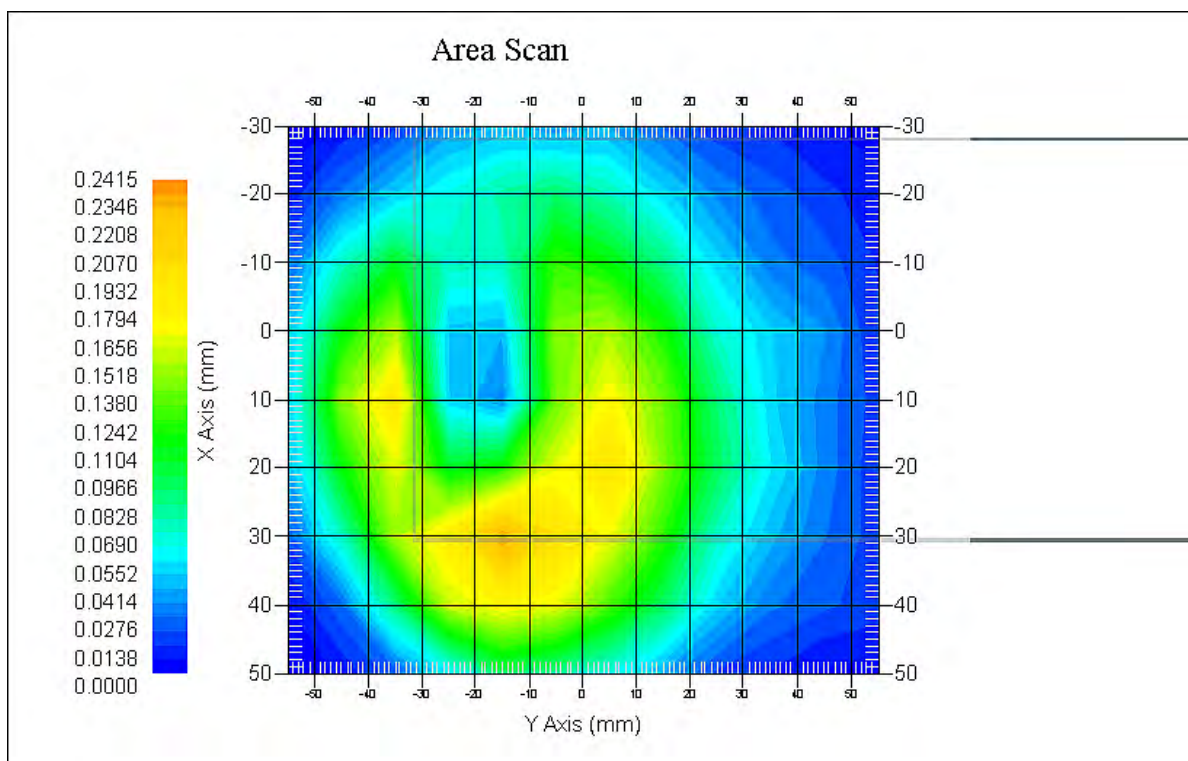

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA850; Body-Worn-Left (836.6MHz Middle Channel)

Measurement Data

Test mode : WCDMA850
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.093 W/kg
 Power Drift-Finish : 0.094 W/kg
 Power Drift (%) : 1.075

Tissue Data


Type : Body
 Frequency : 836.6 MHz
 Epsilon : 54.32 F/m
 Sigma : 0.97 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 1
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.135 W/kg
 10 gram SAR value : 0.093 W/kg
 Area Scan Peak SAR : 0.160 W/kg
 Zoom Scan Peak SAR : 0.286 W/kg

Plot 54#

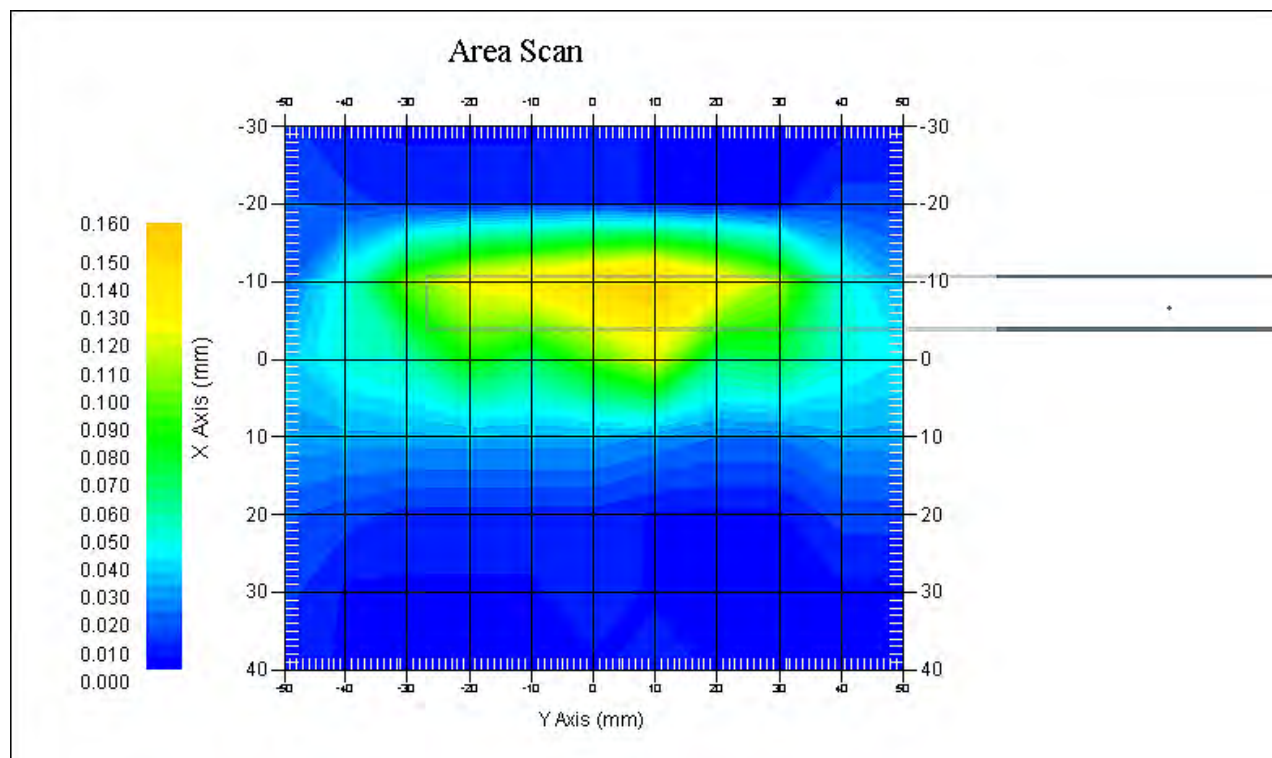

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA850; Body-Worn-Bottom (836.6MHz Middle Channel)

Measurement Data

Test mode : WCDMA850
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.083 W/kg
 Power Drift-Finish : 0.082 W/kg
 Power Drift (%) : -1.203

Tissue Data


Type : Body
 Frequency : 836.6 MHz
 Epsilon : 54.32 F/m
 Sigma : 0.97 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 835
 Duty Cycle Factor : 1
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.085 W/kg
 10 gram SAR value : 0.066 W/kg
 Area Scan Peak SAR : 0.086 W/kg
 Zoom Scan Peak SAR : 0.100 W/kg

Plot 55#

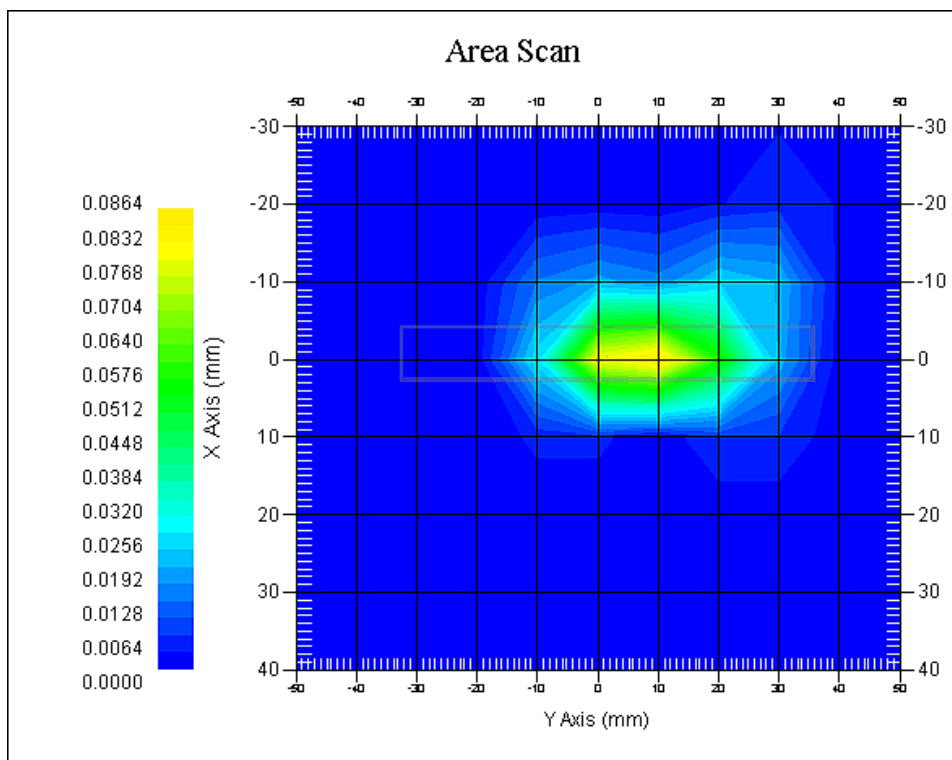

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA1900; Body-Worn-Back (1880.0 MHz Middle Channel)

Measurement Data

Test mode : WCDMA1900
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 9x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.003 W/kg
 Power Drift-Finish : 0.003 W/kg
 Power Drift (%) : -0.264

Tissue Data


Type : Body
 Frequency : 1880.0 MHz
 Epsilon : 52.69 F/m
 Sigma : 1.50 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.315W/kg
 10 gram SAR value : 0.219 W/kg
 Area Scan Peak SAR : 0.320 W/kg
 Zoom Scan Peak SAR : 0.485 W/kg

Plot 56#

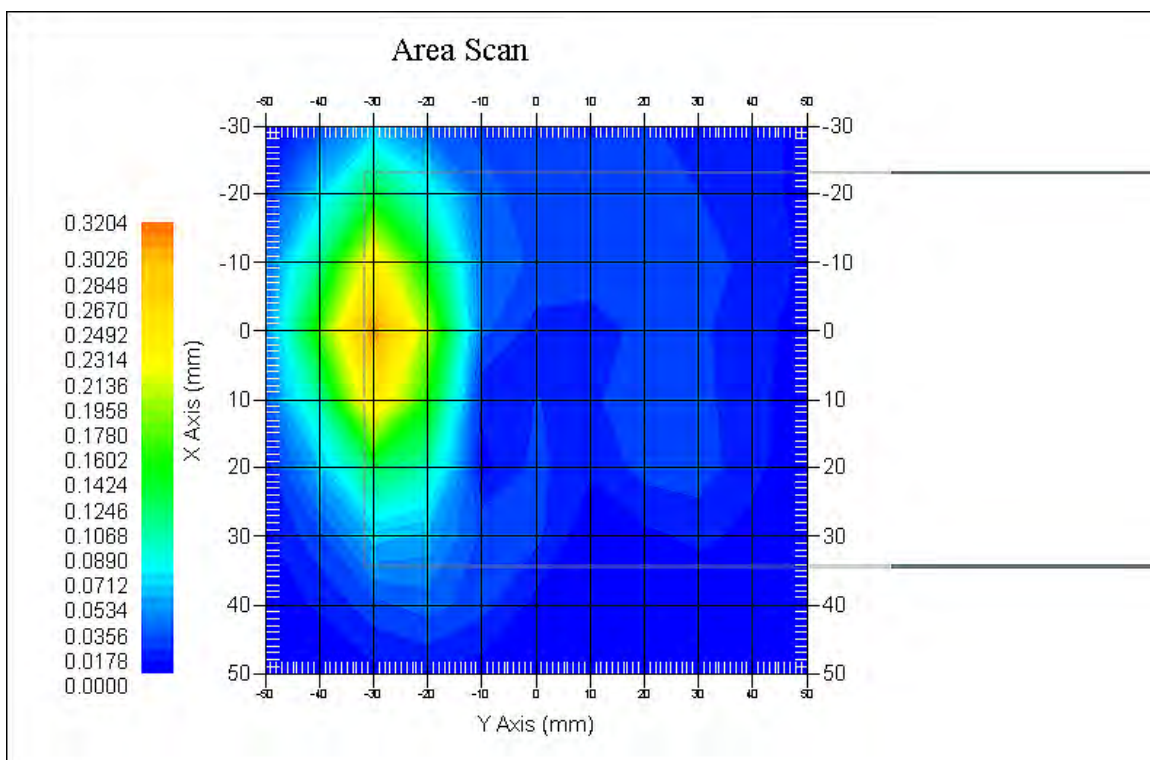

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA1900; Body-Worn-Left (1880.0 MHz Middle Channel)

Measurement Data

Test mode : WCDMA1900
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.012 W/kg
 Power Drift-Finish : 0.012 W/kg
 Power Drift (%) : 0.415

Tissue Data


Type : Body
 Frequency : 1880.0 MHz
 Epsilon : 52.69 F/m
 Sigma : 1.50 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.138 W/kg
 10 gram SAR value : 0.087 W/kg
 Area Scan Peak SAR : 0.156 W/kg
 Zoom Scan Peak SAR : 0.238 W/kg

Plot 57#

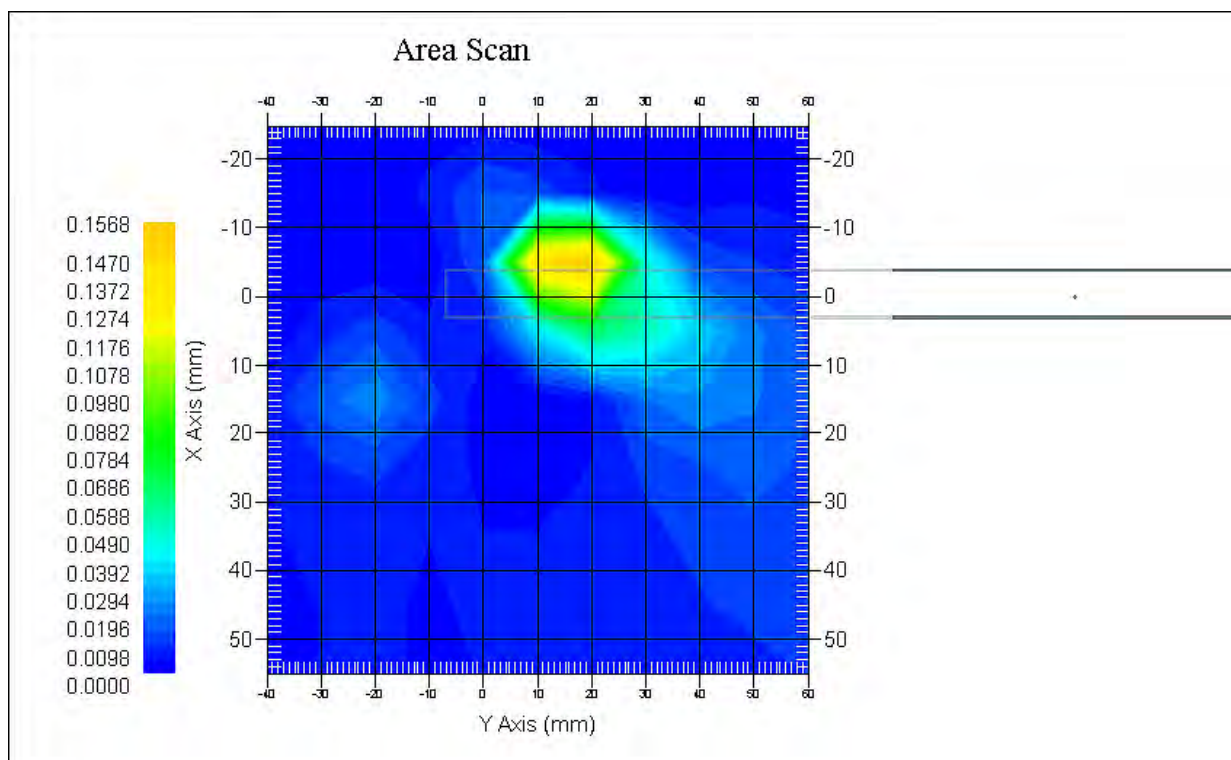

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

WCDMA1900; Body-Worn-Bottom (1880.0 MHz Middle Channel)

Measurement Data

Test mode : WCDMA1900
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.195 W/kg
 Power Drift-Finish : 0.196 W/kg
 Power Drift (%) : 0.513

Tissue Data


Type : Body
 Frequency : 1880.0 MHz
 Epsilon : 52.69 F/m
 Sigma : 1.50 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.252 W/kg
 10 gram SAR value : 0.157 W/kg
 Area Scan Peak SAR : 0.306 W/kg
 Zoom Scan Peak SAR : 0.587 W/kg

Plot 58#

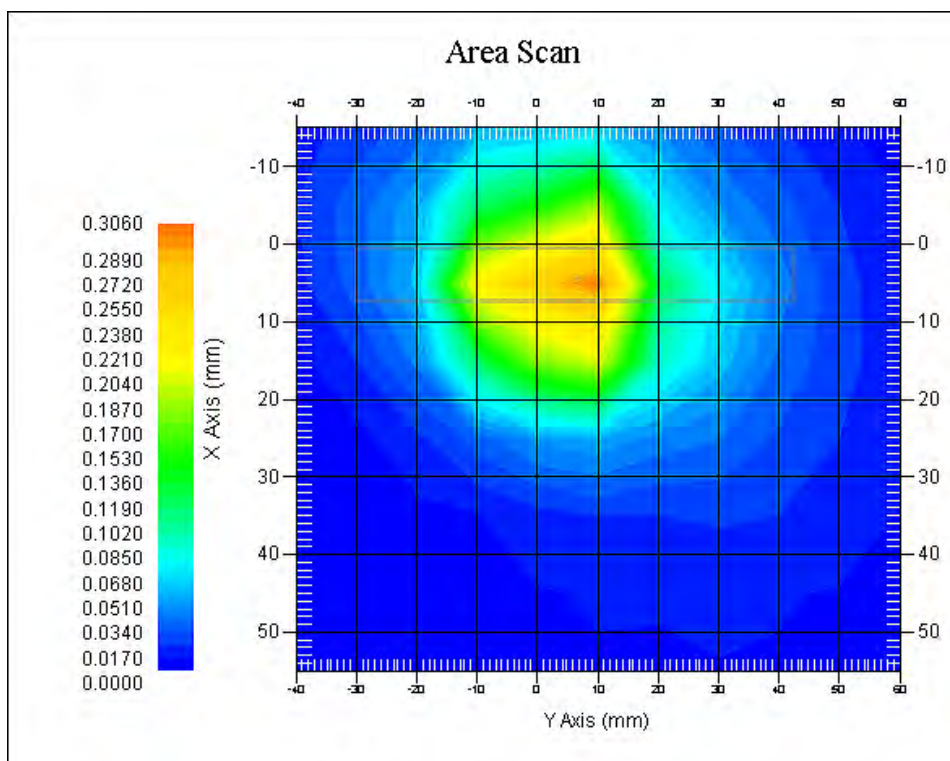

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 2; Body-Back (1900.0 MHz High Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 9x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.013 W/kg
 Power Drift-Finish : 0.013 W/kg
 Power Drift (%) : 0.166

Tissue Data


Type : Body
 Frequency : 1900.0 MHz
 Epsilon : 52.78 F/m
 Sigma : 1.51 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.409 W/kg
 10 gram SAR value : 0.328 W/kg
 Area Scan Peak SAR : 0.488 W/kg
 Zoom Scan Peak SAR : 0.657 W/kg

Plot 59#

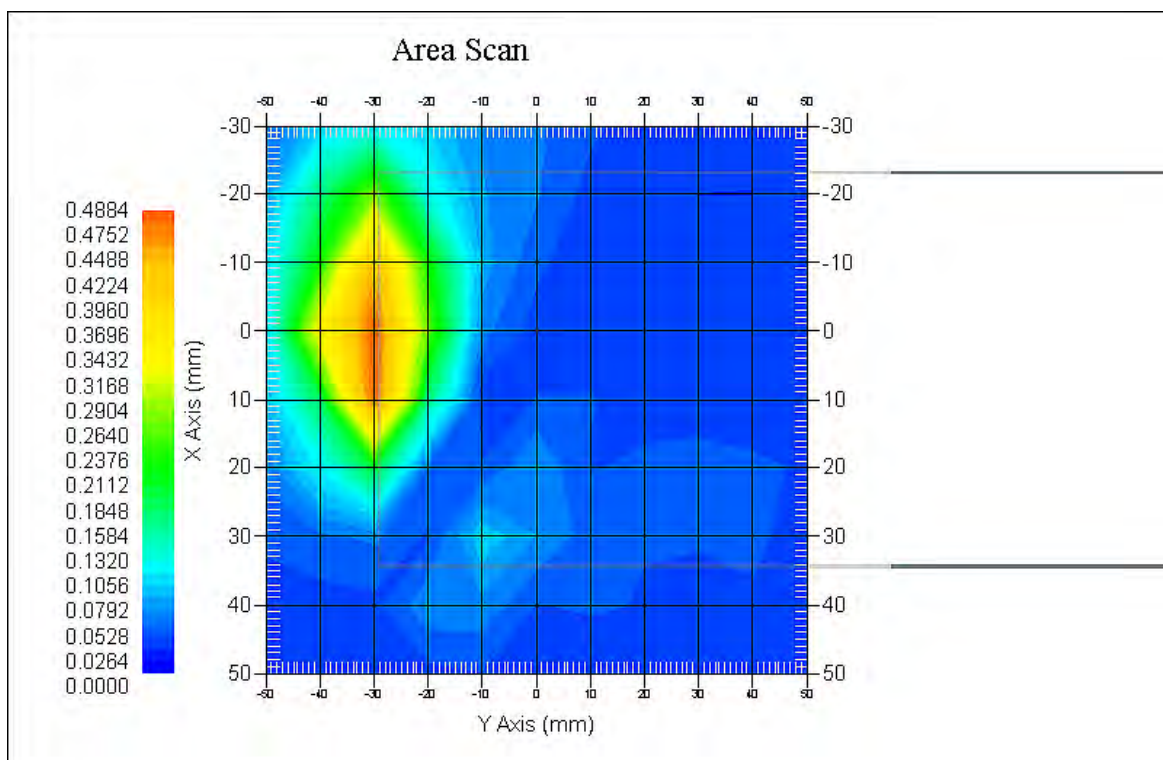

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 2; Body-Back (1900.0 MHz Low Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 9x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.022 W/kg
 Power Drift-Finish : 0.022 W/kg
 Power Drift (%) : 0.395

Tissue Data


Type : Body
 Frequency : 1900.0 MHz
 Epsilon : 52.78 F/m
 Sigma : 1.51 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.402 W/kg
 10 gram SAR value : 0.328 W/kg
 Area Scan Peak SAR : 0.481 W/kg
 Zoom Scan Peak SAR : 0.688 W/kg

Plot 60#

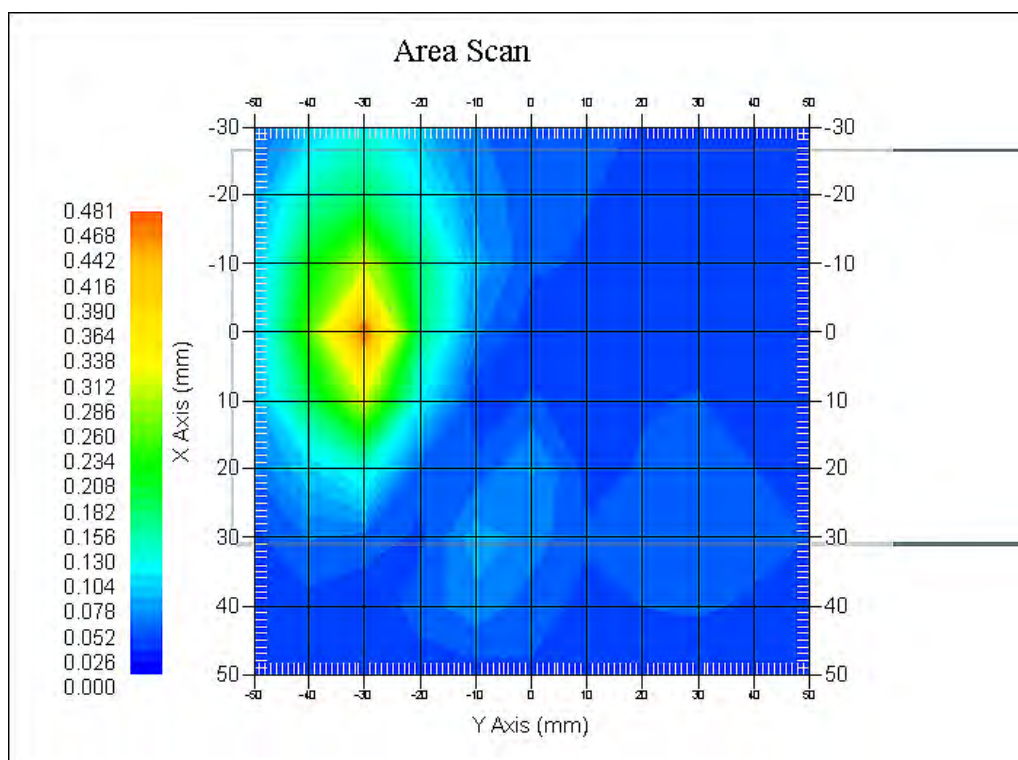

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 2; Body-Left (1900.0 MHz High Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 9x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.116 W/kg
 Power Drift-Finish : 0.118 W/kg
 Power Drift (%) : 1.724

Tissue Data


Type : Body
 Frequency : 1900.0 MHz
 Epsilon : 52.78 F/m
 Sigma : 1.51 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.173 W/kg
 10 gram SAR value : 0.108 W/kg
 Area Scan Peak SAR : 0.200 W/kg
 Zoom Scan Peak SAR : 0.387 W/kg

Plot 61#

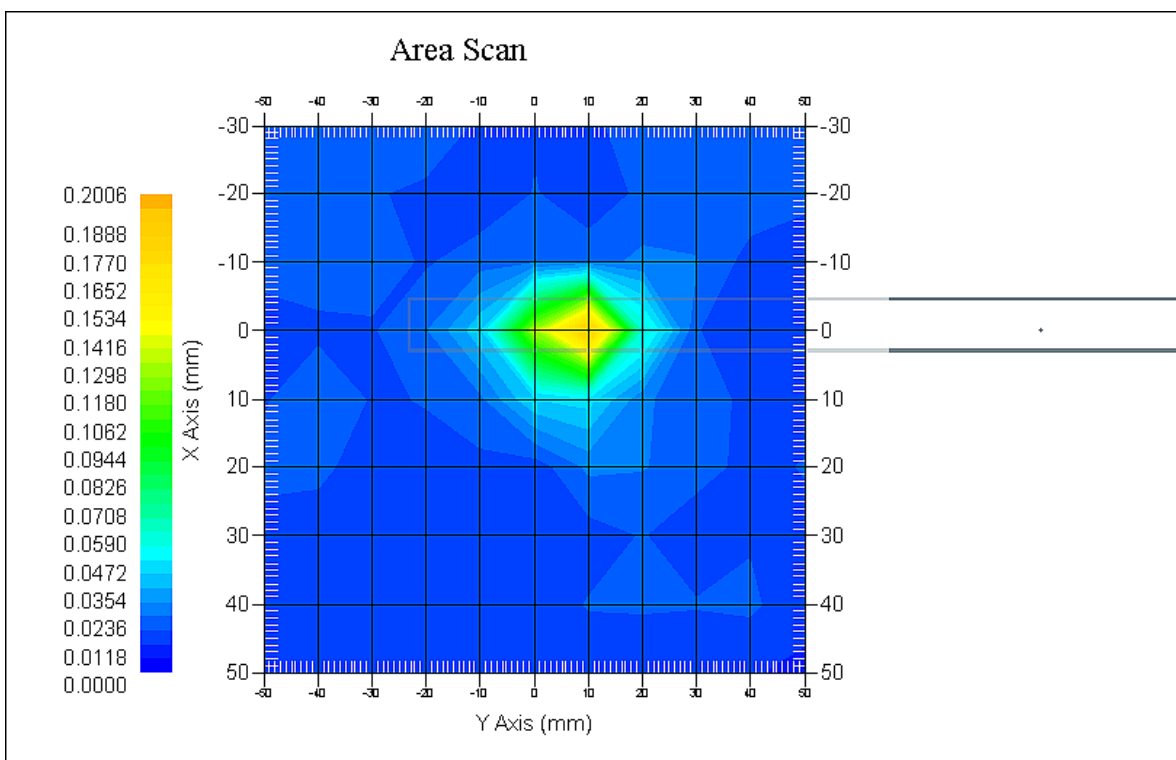

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 2; Body-Left (1900.0 MHz Low Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 9x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.105 W/kg
 Power Drift-Finish : 0.103 W/kg
 Power Drift (%) : -1.905

Tissue Data


Type : Body
 Frequency : 1900.0 MHz
 Epsilon : 52.78 F/m
 Sigma : 1.51 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.182 W/kg
 10 gram SAR value : 0.089 W/kg
 Area Scan Peak SAR : 0.190 W/kg
 Zoom Scan Peak SAR : 0.357 W/kg

Plot 62#

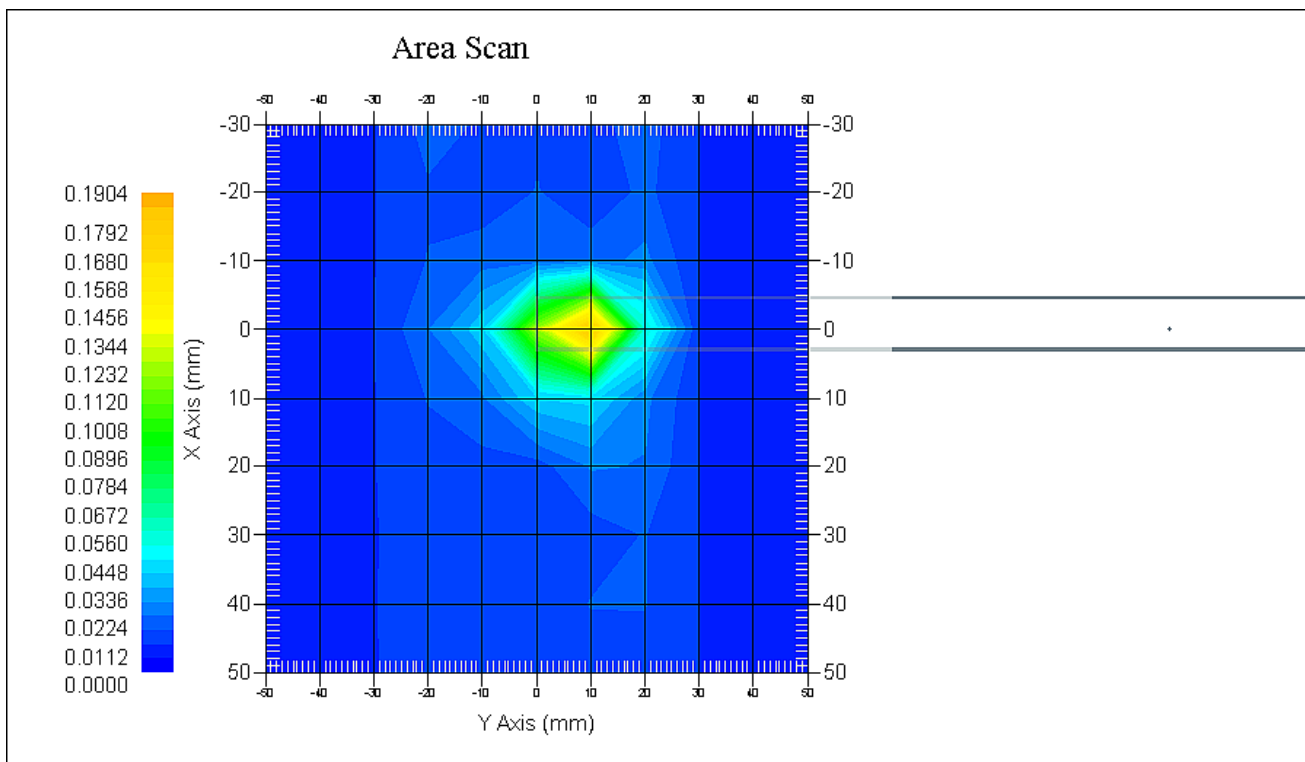

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 2; Body-Bottom (1900.0 MHz High Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x12x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.258 W/kg
 Power Drift-Finish : 0.259 W/kg
 Power Drift (%) : 0.388

Tissue Data


Type : Body
 Frequency : 1900.0 MHz
 Epsilon : 52.78 F/m
 Sigma : 1.51 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.301 W/kg
 10 gram SAR value : 0.193 W/kg
 Area Scan Peak SAR : 0.324 W/kg
 Zoom Scan Peak SAR : 0.557 W/kg

Plot 63#

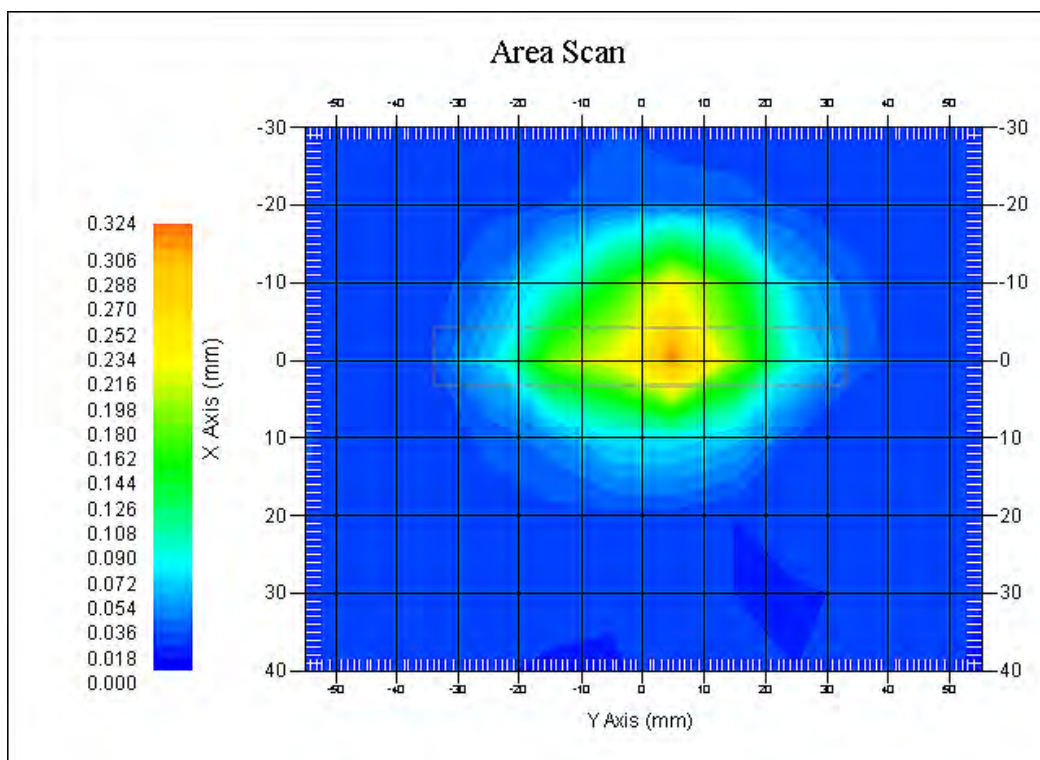

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 2; Body-Bottom (1900.0 MHz Low Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x12x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.275 W/kg
 Power Drift-Finish : 0.273 W/kg
 Power Drift (%) : -0.727

Tissue Data


Type : Body
 Frequency : 1900.0 MHz
 Epsilon : 52.78 F/m
 Sigma : 1.51 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1900
 Duty Cycle Factor : 1
 Conversion Factor : 4.8
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.271 W/kg
 10 gram SAR value : 0.193 W/kg
 Area Scan Peak SAR : 0.316 W/kg
 Zoom Scan Peak SAR : 0.482 W/kg

Plot 64#

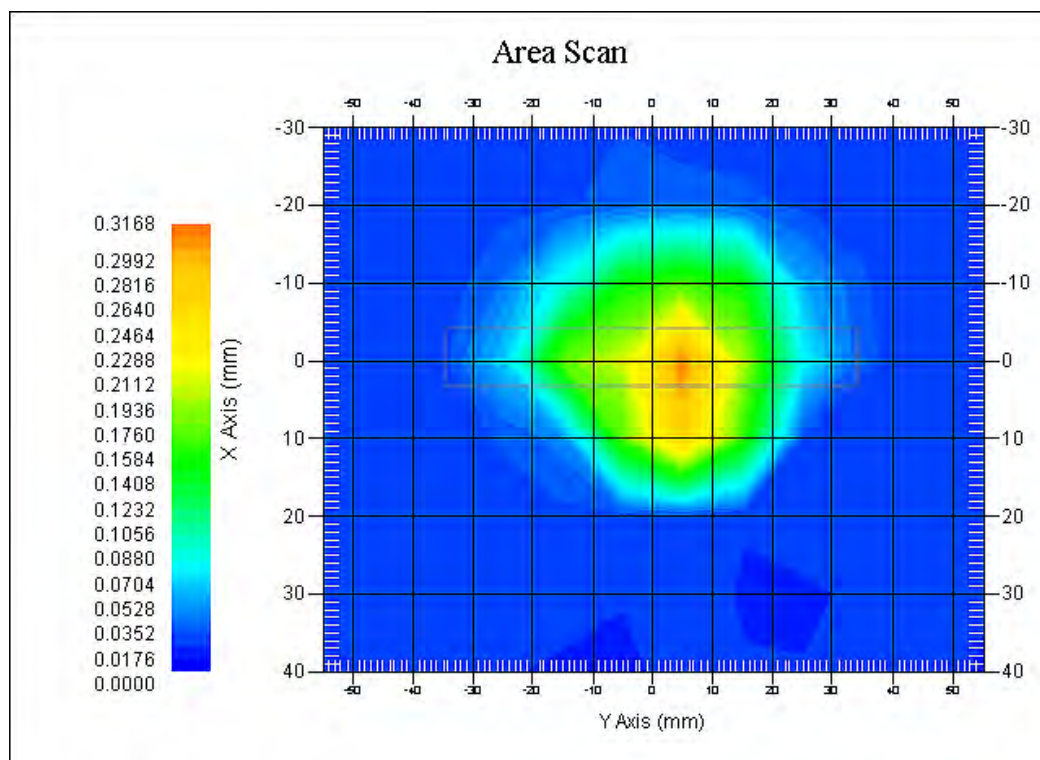

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 4; Body-Back (1732.5 MHz Middle Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 10x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.085 W/kg
 Power Drift-Finish : 0.084 W/kg
 Power Drift (%) : -1.176

Tissue Data


Type : Body
 Frequency : 1732.5 MHz
 Epsilon : 52.69 F/m
 Sigma : 1.45 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1750
 Duty Cycle Factor : 1
 Conversion Factor : 5.3
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.263 W/kg
 10 gram SAR value : 0.352 W/kg
 Area Scan Peak SAR : 0.273 W/kg
 Zoom Scan Peak SAR : 0.453 W/kg

Plot 65#

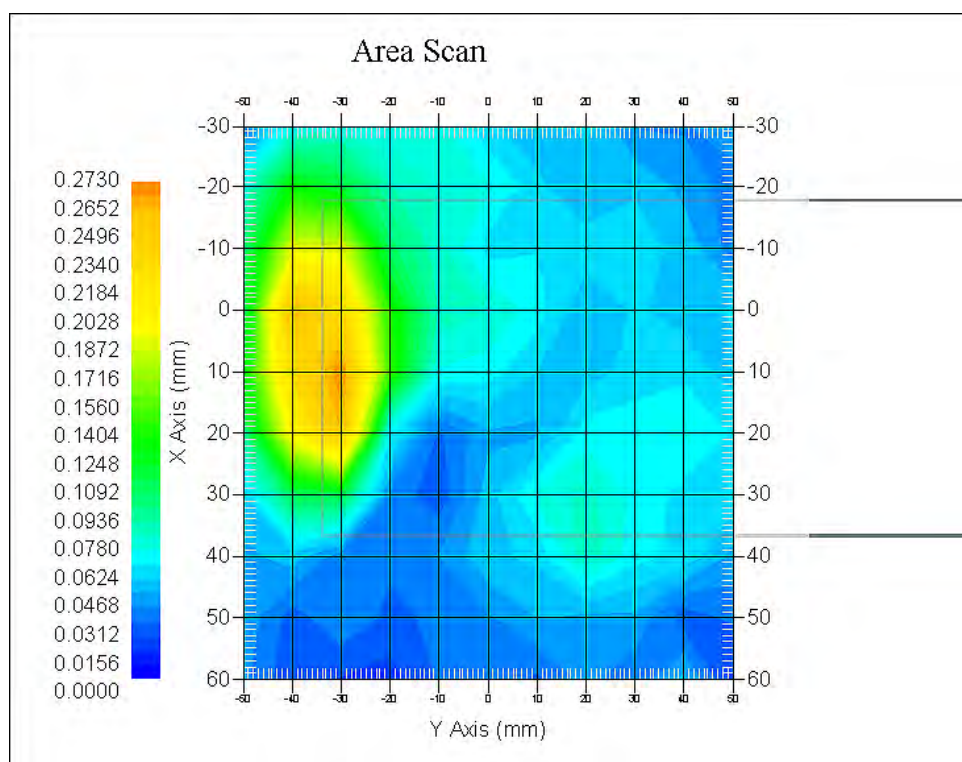

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 4; Body-Back (1732.5 MHz Middle Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 10x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.067 W/kg
 Power Drift-Finish : 0.068 W/kg
 Power Drift (%) : 1.493

Tissue Data


Type : Body
 Frequency : 1732.5 MHz
 Epsilon : 52.69 F/m
 Sigma : 1.45 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1750
 Duty Cycle Factor : 1
 Conversion Factor : 5.3
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.243 W/kg
 10 gram SAR value : 0.168 W/kg
 Area Scan Peak SAR : 0.259 W/kg
 Zoom Scan Peak SAR : 0.386 W/kg

Plot 66#

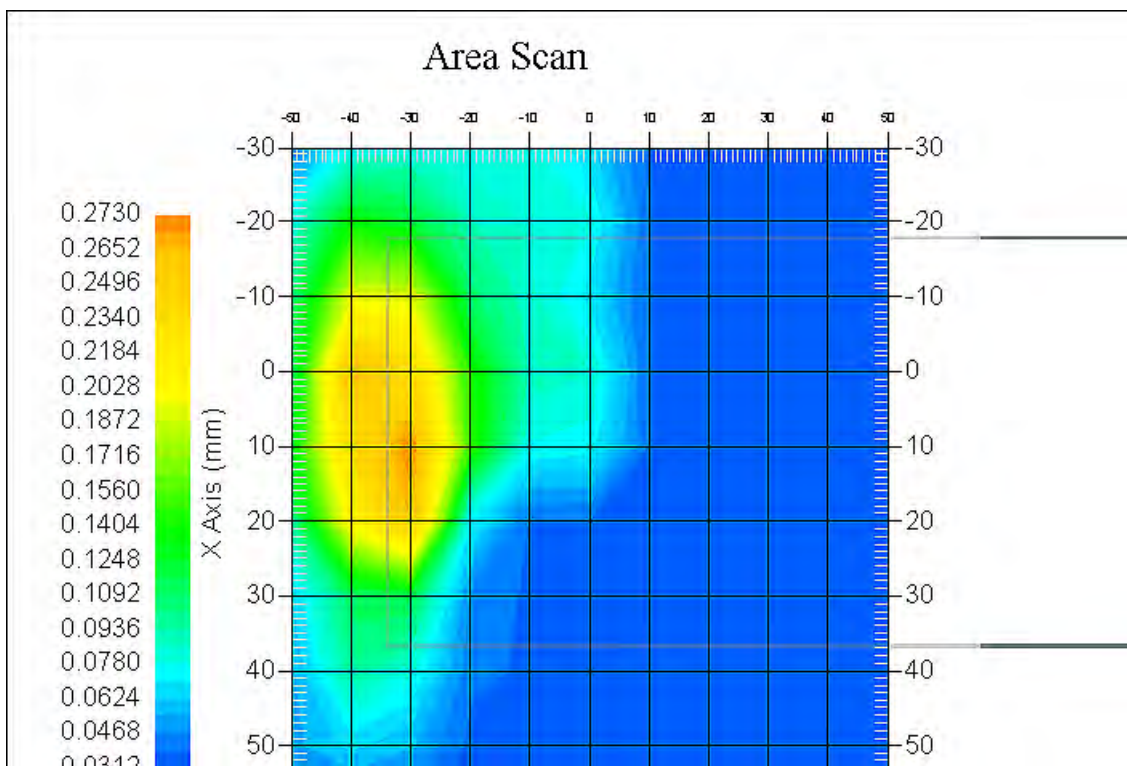

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 4; Body-Left (1732.5 MHz Middle Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 9x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.042 W/kg
 Power Drift-Finish : 0.043 W/kg
 Power Drift (%) : 2.381

Tissue Data


Type : Body
 Frequency : 1732.5 MHz
 Epsilon : 52.69 F/m
 Sigma : 1.45 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1750
 Duty Cycle Factor : 1
 Conversion Factor : 5.3
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.117 W/kg
 10 gram SAR value : 0.068 W/kg
 Area Scan Peak SAR : 0.120 W/kg
 Zoom Scan Peak SAR : 0.321 W/kg

Plot 67#

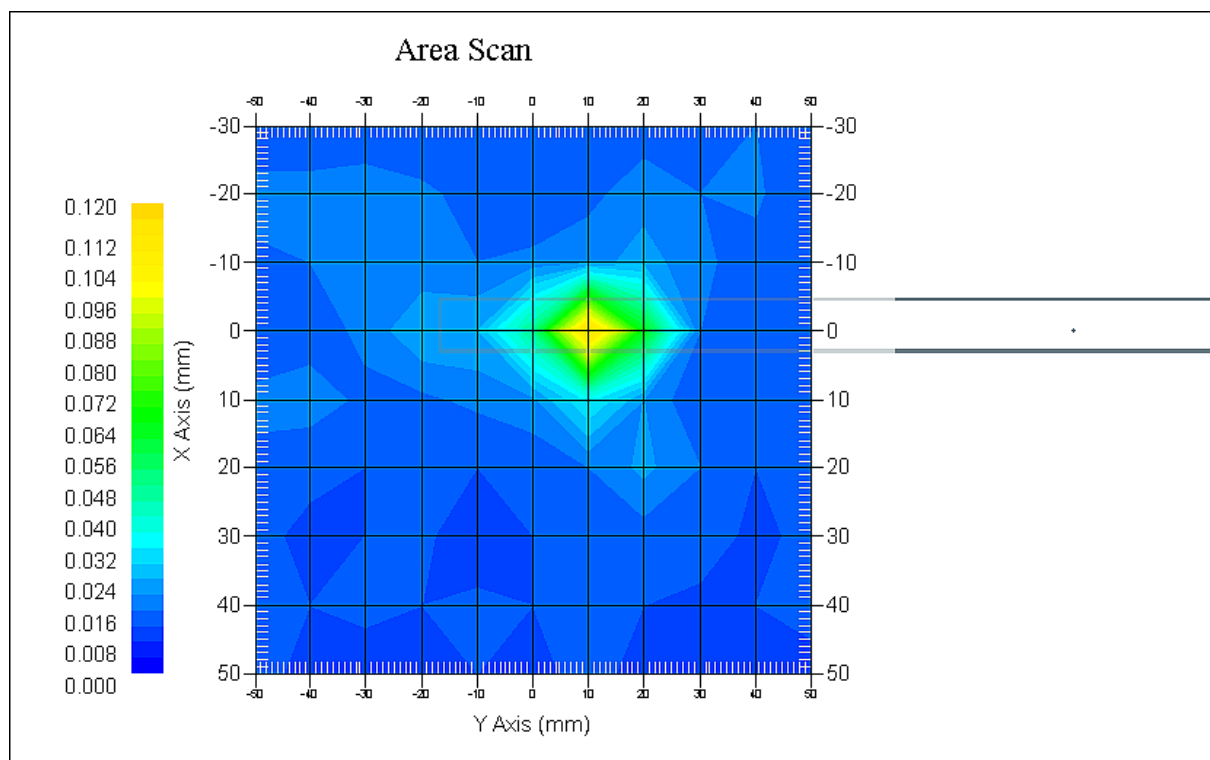

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 4; Body-Left (1732.5 MHz Middle Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 9x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.038 W/kg
 Power Drift-Finish : 0.037 W/kg
 Power Drift (%) : -2.632

Tissue Data


Type : Body
 Frequency : 1732.5 MHz
 Epsilon : 52.69 F/m
 Sigma : 1.45 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1750
 Duty Cycle Factor : 1
 Conversion Factor : 5.3
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.114 W/kg
 10 gram SAR value : 0.068 W/kg
 Area Scan Peak SAR : 0.117 W/kg
 Zoom Scan Peak SAR : 0.314 W/kg

Plot 68#

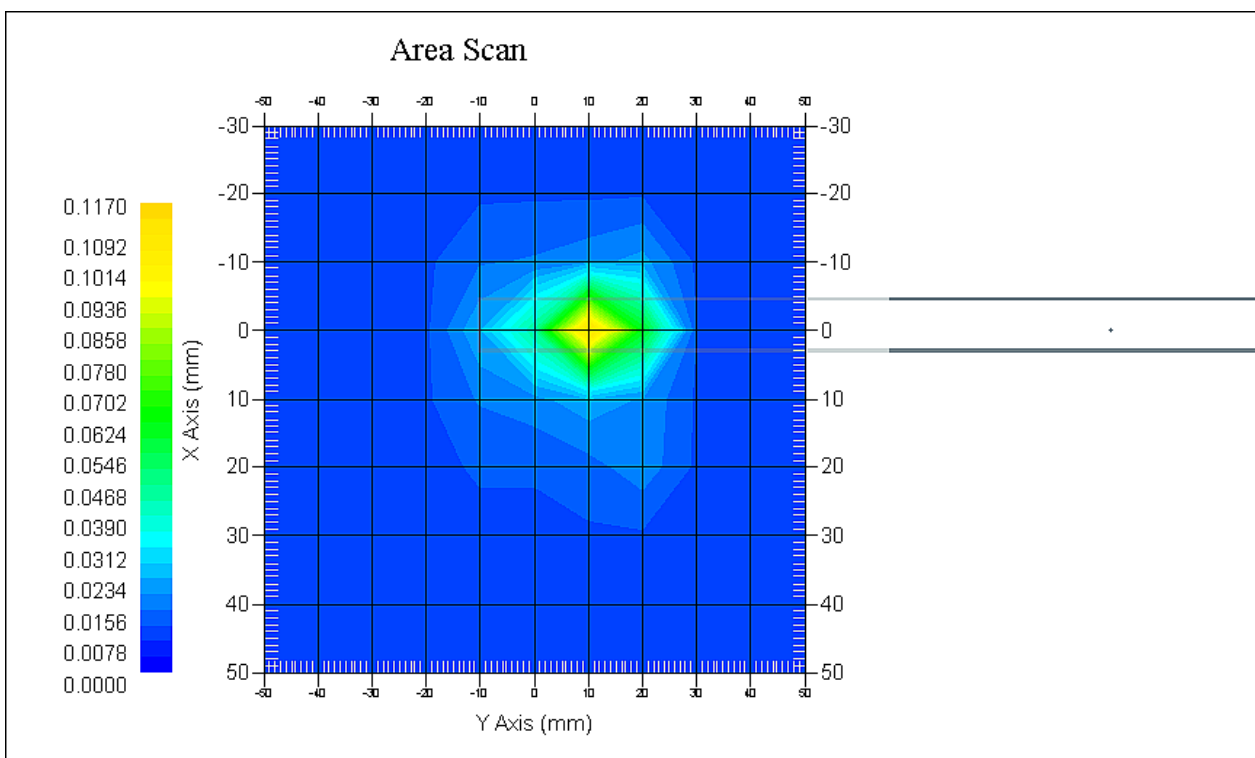

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 4; Body-Bottom (1732.5 MHz Middle Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x12x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.263 W/kg
 Power Drift-Finish : 0.266 W/kg
 Power Drift (%) : 1.141

Tissue Data


Type : Body
 Frequency : 1732.5 MHz
 Epsilon : 52.69 F/m
 Sigma : 1.45 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1750
 Duty Cycle Factor : 1
 Conversion Factor : 5.3
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.237 W/kg
 10 gram SAR value : 0.128 W/kg
 Area Scan Peak SAR : 0.287 W/kg
 Zoom Scan Peak SAR : 0.554 W/kg

Plot 69#

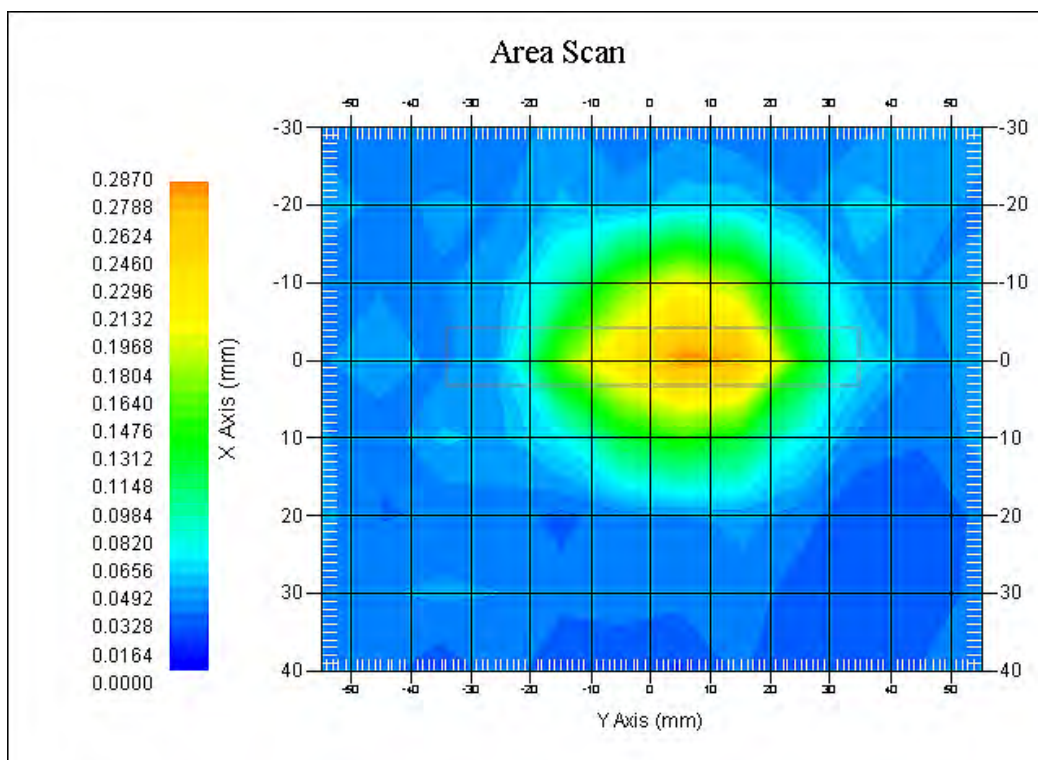

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 4; Body-Bottom (1732.5 MHz Middle Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x12x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.257 W/kg
 Power Drift-Finish : 0.255 W/kg
 Power Drift (%) : -0.778

Tissue Data


Type : Body
 Frequency : 1732.5 MHz
 Epsilon : 52.69 F/m
 Sigma : 1.45 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 1750
 Duty Cycle Factor : 1
 Conversion Factor : 5.3
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.217 W/kg
 10 gram SAR value : 0.185 W/kg
 Area Scan Peak SAR : 0.266 W/kg
 Zoom Scan Peak SAR : 0.379 W/kg

Plot 70#

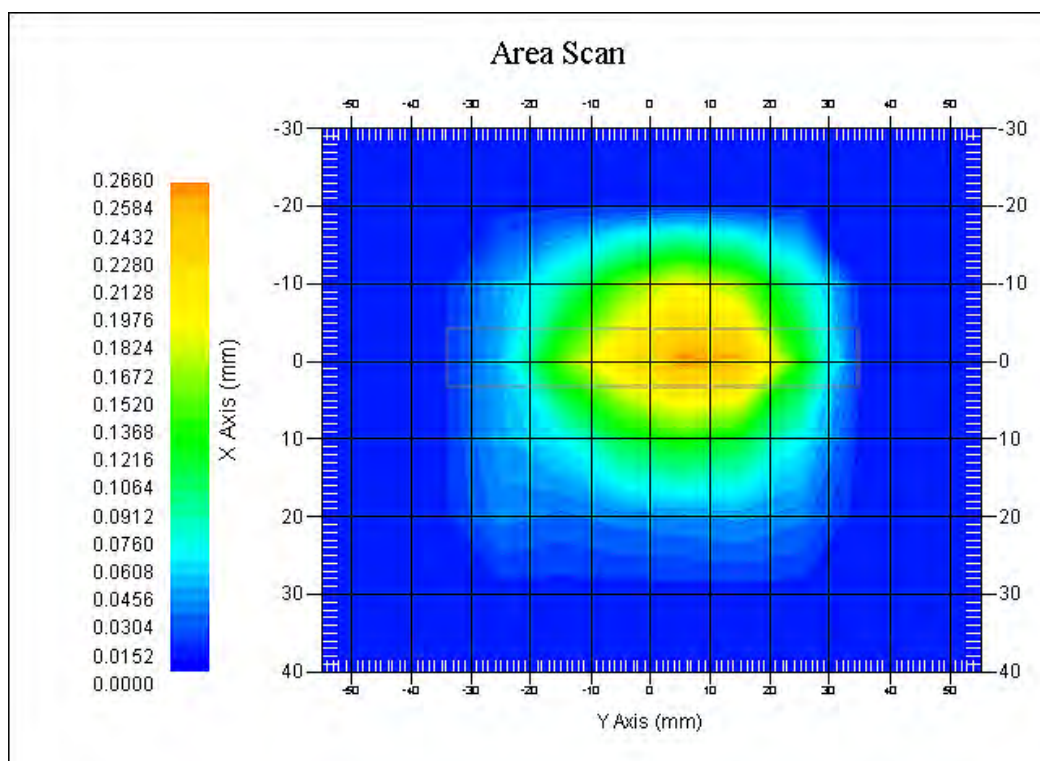

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 17; Body-Back (710 MHz Middle Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 10x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.144 W/kg
 Power Drift-Finish : 0.145 W/kg
 Power Drift (%) : 0.694

Tissue Data


Type : Body
 Frequency : 710 MHz
 Epsilon : 54.07 F/m
 Sigma : 0.93 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 750
 Duty Cycle Factor : 1
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.367 W/kg
 10 gram SAR value : 0.236 W/kg
 Area Scan Peak SAR : 0.392 W/kg
 Zoom Scan Peak SAR : 0.827 W/kg

Plot 71#

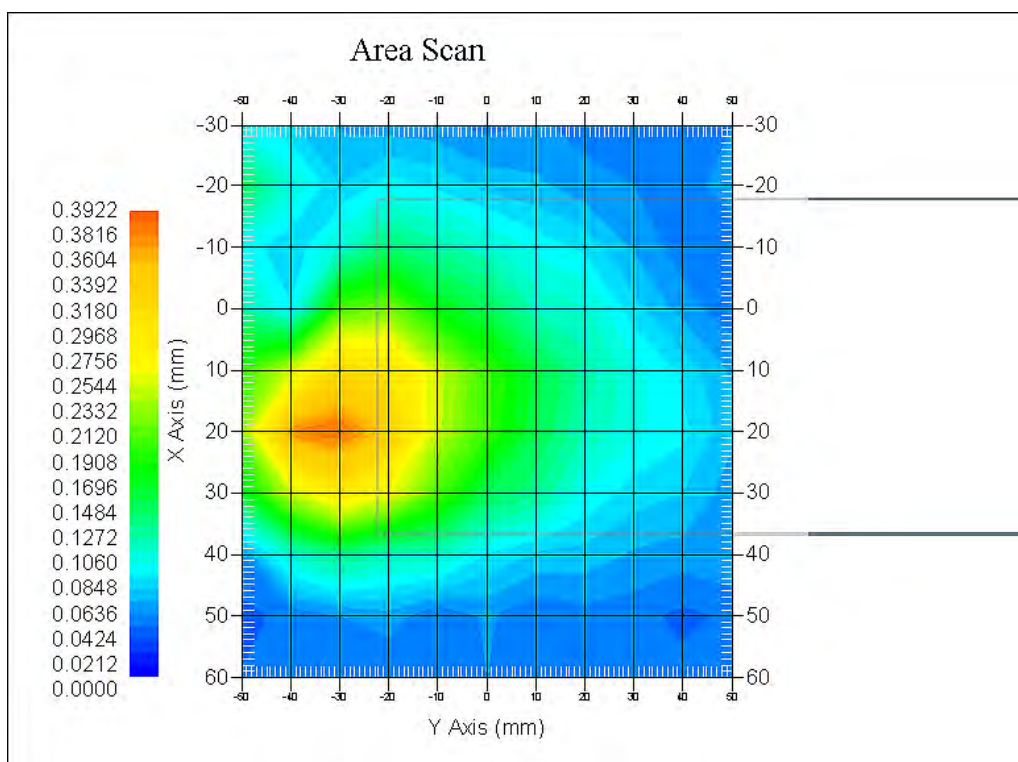

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 17; Body-Back (710 MHz Middle Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 10x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.138 W/kg
 Power Drift-Finish : 0.132 W/kg
 Power Drift (%) : -4.348

Tissue Data


Type : Body
 Frequency : 710 MHz
 Epsilon : 54.07 F/m
 Sigma : 0.93 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 750
 Duty Cycle Factor : 1
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.348 W/kg
 10 gram SAR value : 0.227 W/kg
 Area Scan Peak SAR : 0.370 W/kg
 Zoom Scan Peak SAR : 0.689 W/kg

Plot 72#

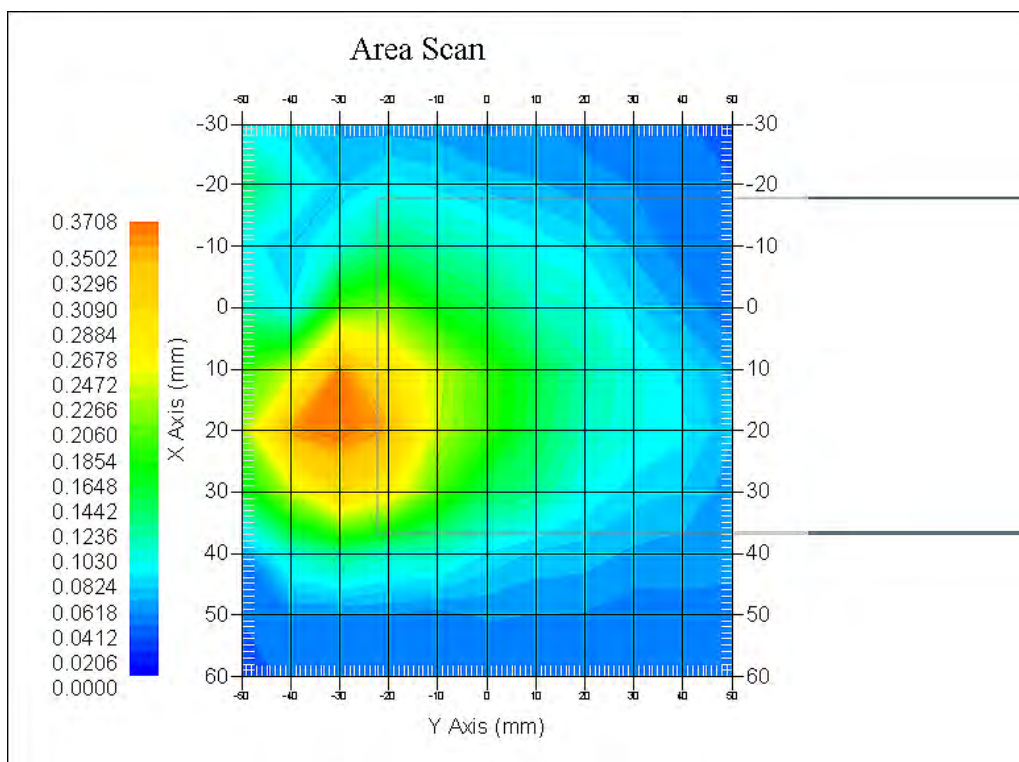

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 17; Body-Left (710 MHz Middle Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 9x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.144 W/kg
 Power Drift-Finish : 0.146 W/kg
 Power Drift (%) : 1.389

Tissue Data


Type : Body
 Frequency : 710 MHz
 Epsilon : 54.07 F/m
 Sigma : 0.93 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 750
 Duty Cycle Factor : 1
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.179 W/kg
 10 gram SAR value : 0.099 W/kg
 Area Scan Peak SAR : 0.181 W/kg
 Zoom Scan Peak SAR : 0.387 W/kg

Plot 73#

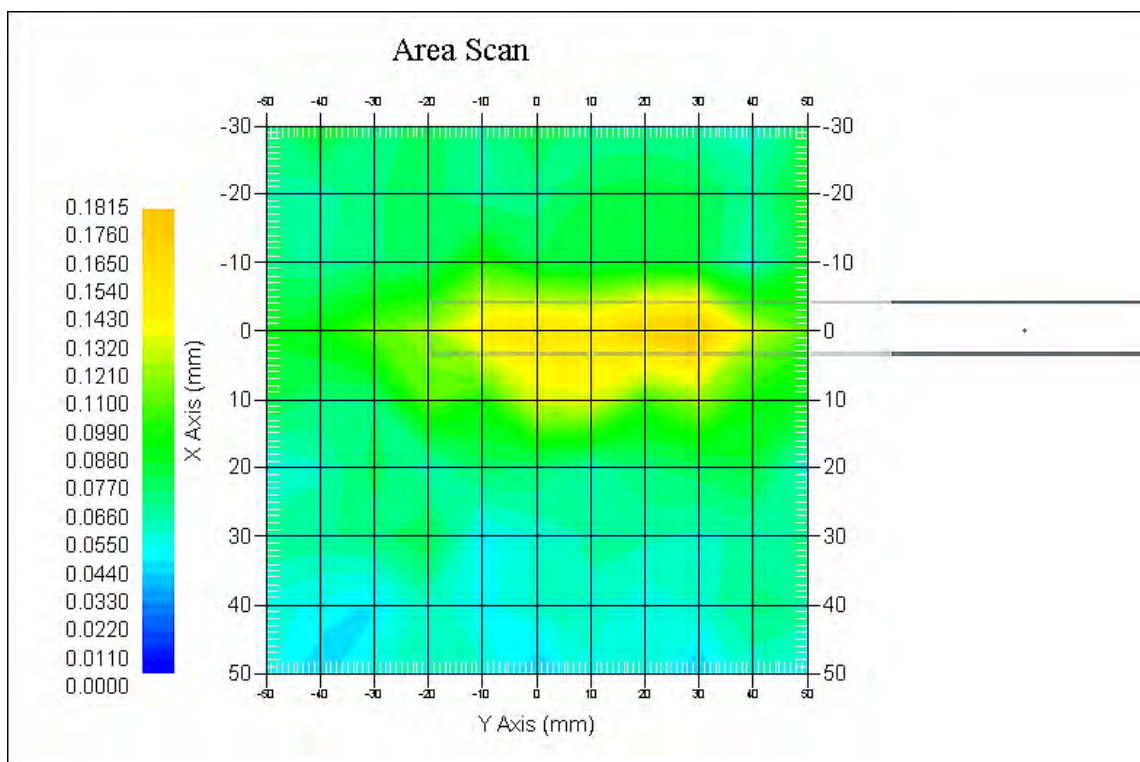

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 17; Body-Left (710 MHz Middle Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 9x11x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.157 W/kg
 Power Drift-Finish : 0.159 W/kg
 Power Drift (%) : 1.274

Tissue Data


Type : Body
 Frequency : 710 MHz
 Epsilon : 54.07 F/m
 Sigma : 0.93 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 750
 Duty Cycle Factor : 1
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.172 W/kg
 10 gram SAR value : 0.108 W/kg
 Area Scan Peak SAR : 0.178 W/kg
 Zoom Scan Peak SAR : 0.354 W/kg

Plot 74#

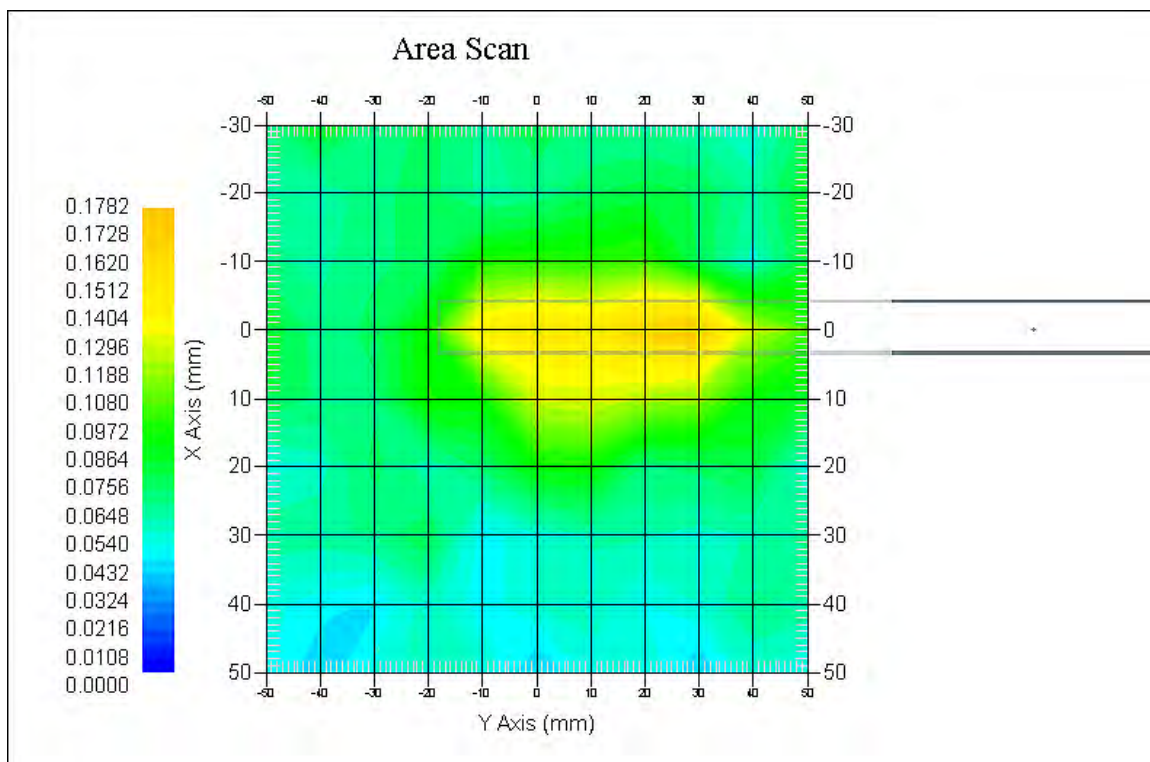

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 17; Body-Bottom (710 MHz Middle Channel)

Measurement Data

Test mode : 1RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x12x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.131 W/kg
 Power Drift-Finish : 0.132 W/kg
 Power Drift (%) : 0.763

Tissue Data


Type : Body
 Frequency : 710 MHz
 Epsilon : 54.07 F/m
 Sigma : 1.50 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 750
 Duty Cycle Factor : 1
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.147 W/kg
 10 gram SAR value : 0.088 W/kg
 Area Scan Peak SAR : 0.150 W/kg
 Zoom Scan Peak SAR : 0.213 W/kg

Plot 75#

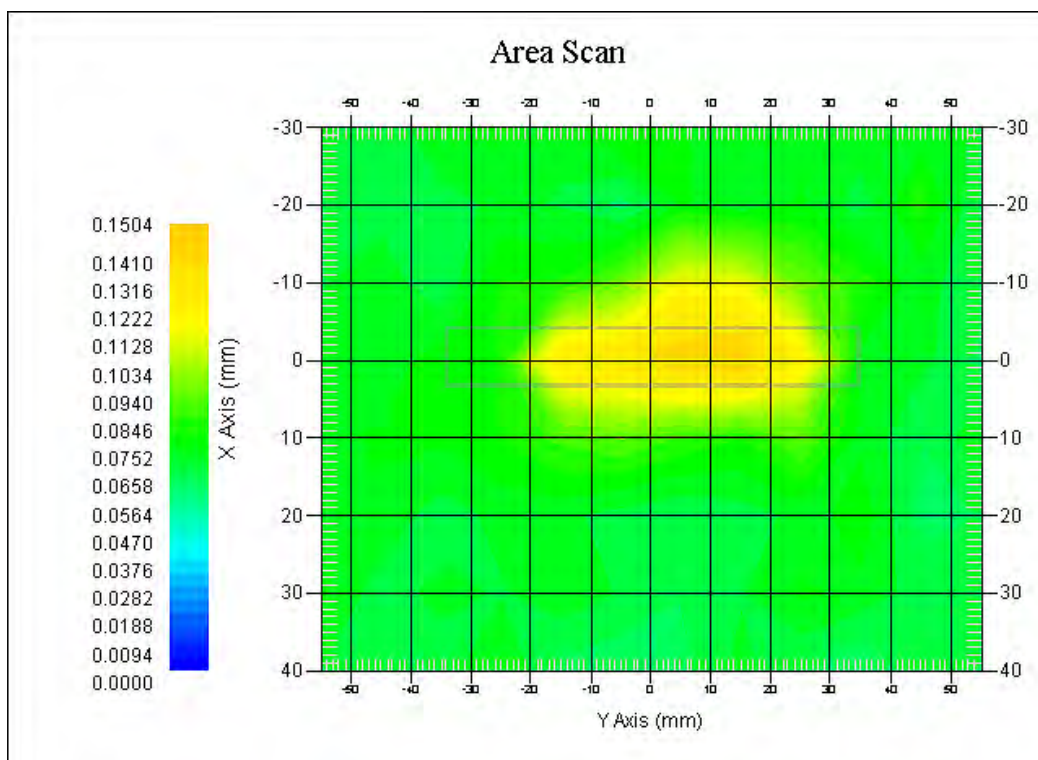

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

LTE Band 17; Body-Bottom (710 MHz Middle Channel)

Measurement Data

Test mode : 50RB
 Crest Factor : 1
 Scan Type : Complete
 Area Scan : 8x12x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.125 W/kg
 Power Drift-Finish : 0.126 W/kg
 Power Drift (%) : 0.812

Tissue Data


Type : Body
 Frequency : 710 MHz
 Epsilon : 53.93 F/m
 Sigma : 1.50 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency Band : 750
 Duty Cycle Factor : 1
 Conversion Factor : 5.9
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.135 W/kg
 10 gram SAR value : 0.075 W/kg
 Area Scan Peak SAR : 0.144 W/kg
 Zoom Scan Peak SAR : 0.254 W/kg

Plot 76#

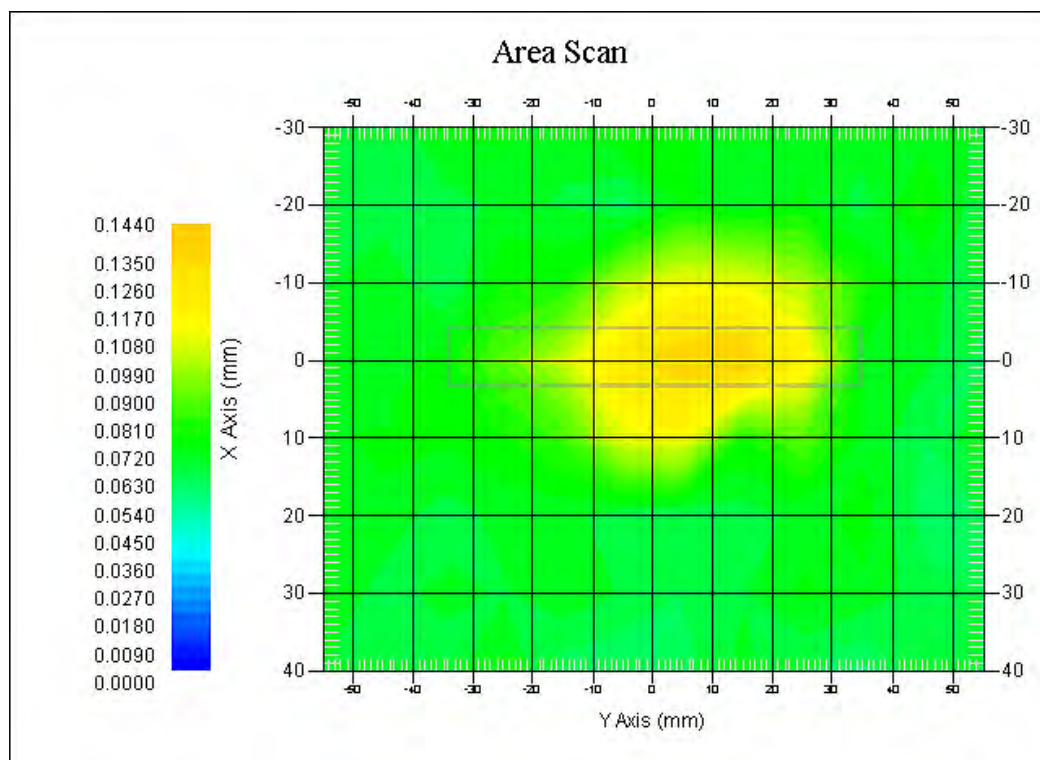

APPENDIX A MEASUREMENT UNCERTAINTY

According to **IEEE1528:2013**, the uncertainty budget has been determined for the Head SAR measurement system and is given in the following Table.

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	c_i^1 (1-g)	c_i^1 (10-g)	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	$\sqrt{3}$	$(1-cp)^{1/2}$	$(\frac{1-cp}{2})^1$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	$\sqrt{3}$	\sqrt{cp}	\sqrt{cp}	4.4	4.4
Boundary Effect	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	rectangular	$\sqrt{3}$	1	1	2.7	2.7
Detection Limit	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	$\sqrt{3}$	1	1	0.5	0.5
Integration Time	1.7	rectangular	$\sqrt{3}$	1	1	1.0	1.0
RF Ambient Condition -Noise	0.6	rectangular	$\sqrt{3}$	1	1	0.3	0.3
RF Ambient Condition - Reflections	3.0	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Probe Positioner Mech. Restrictions	0.4	rectangular	$\sqrt{3}$	1	1	0.2	0.2
Probe Positioning with respect to Phantom Shell	2.9	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	$\sqrt{3}$	1	1	2.1	2.1
Test sample related							
Test sample positioning	2.0	normal	1	1	1	2.0	2.0
Device Holder Uncertainty	4.0	normal	1	1	1	6.215	6.215
Drift of Output Power	5.0	rectangular	$\sqrt{3}$	1	1	2.67	2.67
Phantom and Setup							
Phantom Uncertainty	3.4	rectangular	$\sqrt{3}$	1	1	2.0	2.0
SAR correction in permittivity and conductivity	1.2	normal	1	1	0.85	1.2	1.0
Liquid conductivity measurement	5.0	normal	1	0.78	0.71	3.9	3.6
Liquid permittivity measurement	5.0	normal	1	0.25	0.29	1.3	1.5
conductivity—temperature	1.1	rectangular	$\sqrt{3}$	0.78	0.71	0.5	0.5
permittivity—temperature	1.3	rectangular	$\sqrt{3}$	0.23	0.23	0.2	0.2
Combined Uncertainty		RSS				10.78	10.55
Expanded uncertainty (coverage factor=2)		Normal(k=2)				21.56	21.10

According to **IEC62209-2:2010**, the uncertainty budget has been determined for the Body SAR measurement system and is given in the following Table.

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	c_i^1 (1-g)	c_i^1 (10-g)	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	$\sqrt{3}$	1	1	1.5	1.5
Boundary Effect	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	rectangular	$\sqrt{3}$	1	1	2.7	2.7
Detection Limit	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	$\sqrt{3}$	1	1	0.5	0.5
Integration Time	1.7	rectangular	$\sqrt{3}$	1	1	1.0	1.0
RF Ambient Condition -Noise	0.6	rectangular	$\sqrt{3}$	1	1	0.3	0.3
RF Ambient Condition - Reflections	3.0	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Probe Positioner Mech. Restrictions	0.4	rectangular	$\sqrt{3}$	1	1	0.2	0.2
Probe Positioning with respect to Phantom Shell	2.9	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	$\sqrt{3}$	1	1	2.1	2.1
Test sample related							
Test sample positioning	2.0	normal	1	1	1	2.0	2.0
Device Holder Uncertainty	4.0	normal	1	1	1	6.215	6.215
Drift of Output Power	5.0	rectangular	$\sqrt{3}$	1	1	2.67	2.67
Phantom and Setup							
Phantom Uncertainty	3.4	rectangular	$\sqrt{3}$	1	1	2.0	2.0
SAR correction in permittivity and conductivity	1.2	normal	1	1	0.84	1.2	1.0
Liquid conductivity measurement	5.0	normal	1	0.78	0.71	3.9	3.6
Liquid permittivity measurement	5.0	normal	1	0.23	0.26	1.3	1.5
conductivity—temperature	1.1	rectangular	$\sqrt{3}$	0.78	0.71	0.5	0.5
permittivity—temperature	1.3	rectangular	$\sqrt{3}$	0.23	0.26	0.2	0.2
Combined Uncertainty		RSS				9.58	9.49
Expanded uncertainty (coverage factor=2)		Normal(k=2)				19.16	18.98

APPENDIX B – PROBE CALIBRATION CERTIFICATES

NCL CALIBRATION LABORATORIES

Calibration File No.: PC-1654

Task No: BACL-5805

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the **NCL CALIBRATION LABORATORIES** by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe

Record of Calibration

Head and Body

Manufacturer: APREL Inc.

Model No.: ALS-E020

Serial No.: 500-00283

Calibration Procedure: D01-032-E020-V2, D22-012-Tissue, D28-002-Dipole
Project No: BACL-5805

Calibrated: 12th December 2015
Released on: 14th December 2015

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:



Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

Suite 102, 303 Terry Fox Dr,
OTTAWA, ONTARIO
CANADA K2K 3J1

Division of APREL Lab.
TEL: (613) 435-8300
FAX: (613) 435-8306

NCL Calibration Laboratories

Division of APREL, Inc.

Introduction

This Calibration Report reproduces the results of the calibration performed in line with the references listed below. Calibration is performed using accepted methodologies as per the references listed below. Probes are calibrated for air, and tissue and the values reported are the results from the physical quantification.

Calibration Method

Probes are calibrated using the following methods.

<800 MHz

TEM Cell for sensitivity in air

Standard phantom using temperature transfer method for sensitivity in tissue

>800 MHz

Waveguide* method to determine sensitivity in air and tissue

*Waveguide is numerically (simulation) assessed to determine the field distribution and power

The boundary effect for the probe is assessed using a standard flat phantom where the probe output is compared against a numerically simulated series of data points

References

- IEEE Standard 1528:2013
IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- IEC 62209-1:2006
Human Exposure to RF Fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to measure the Specific Absorption Rate (SAR) for hand-held mobile wireless devices
- IEC 62209-2:2010
Human exposure to RF fields from hand-held and body-mounted wireless devices - Human models, instrumentation, and procedures - Part 2: specific absorption rate (SAR) for wireless communication devices (30 MHz - 6 GHz)
- TP-D01-032-E020-V2 E-Field probe calibration procedure
- D22-012-Tissue dielectric tissue calibration procedure
- D28-002-Dipole procedure for validation of SAR system using a dipole
- IEEE 1309 Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

NCL Calibration Laboratories

Division of APREL Inc.

Conditions

Probe 500-00283 was a recalibration.

Ambient Temperature of the Laboratory: 20 °C +/- 1.5°C
Temperature of the Tissue: 21 °C +/- 1.5°C
Relative Humidity: < 60%

Primary Measurement Standards

Instrument	Serial Number	Cal due date
Power Meter Tektronix USB	11C940	Apr 2, 2017
Signal Generator Agilent E4438C	MY45094463	Dec 11, 2017

Secondary Measurement Standards

Network Analyzer Anritsu 37347C	002106	Feb. 4, 2017
---------------------------------	--------	--------------


Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.



Art Brennan, Quality Manager



Dan Brooks, Test Engineer

NCL Calibration Laboratories

Division of APREL, Inc.

Probe Summary

Probe Type: E-Field Probe E-020
Serial Number: 500-00283
Frequency: As presented on page 5
Sensor Offset: 1.56
Sensor Length: 2.5
Tip Enclosure: Composite*
Tip Diameter: < 2.9 mm
Tip Length: 55 mm
Total Length: 289 mm
Diode Compression Point: 95 mV

Sensitivity in Air

Frequency Range	Channel X, $\mu\text{V}/(\text{V}/\text{m})^2$	Channel Y, $\mu\text{V}/(\text{V}/\text{m})^2$	Channel Z, $\mu\text{V}/(\text{V}/\text{m})^2$	Tolerance, $\mu\text{V}/(\text{V}/\text{m})^2$
450 MHz	1.212	1.205	1.199	± 0.004
750 MHz, 835 MHz 900 MHz	1.212	1.21	1.209	± 0.004
1 GHz – 4 GHz	1.21	1.21	1.207	± 0.004
5 GHz – 6 GHz	1.2	1.192	1.19	± 0.005

*Resistive to recommended tissue recipes per IEEE-1528

NCL Calibration Laboratories

Division of APREL, Inc.

Calibration for Tissue (Head H, Body B)

Frequency	Tissue Type	Measured Epsilon	Measured Sigma	Standard Uncertainty (%)	Calibration Frequency Range (MHz)	Conversion Factor
450 H	Head	43.5	0.84	3.5	±50	5.7
450 B	Body	56.77	0.93	3.5	±50	5.8
750 H	Head	42.92	0.92	3.5	±50	6.0
750 B	Body	55.57	0.93	3.5	±50	5.9
835 H	Head	43.44	0.94	3.5	±50	5.9
835 B	Body	54.91	1.00	3.5	±50	5.9
900 H	Head	41.05	1.01	3.5	±50	6.0
900 B	Body	54.86	1.04	3.5	±50	5.9
1450 H	Head	X	X	X	X	X
1450 B	Body	X	X	X	X	X
1500 H	Head	X	X	X	X	X
1500 B	Body	X	X	X	X	X
1640 H	Head	X	X	X	X	X
1640 B	Body	X	X	X	X	X
1750 H	Head	38.58	1.36	3.5	±75	5.4
1750 B	Body	51.5	1.52	3.5	±75	5.3
1800 H	Head	X	X	X	X	X
1800 B	Body	X	X	X	X	X
1900 H	Head	40.72	1.37	3.5	±75	4.8
1900 B	Body	52.29	1.58	3.5	±75	4.8
2000 H	Head	X	X	X	X	X
2000 B	Body	X	X	X	X	X
2100 H	Head	X	X	X	X	X
2100 B	Body	X	X	X	X	X
2300 H	Head	X	X	X	X	X
2300 B	Body	X	X	X	X	X
2450 H	Head	37.35	1.85	3.5	±75	4.8
2450 B	Body	53.26	1.96	3.5	±75	4.3
3000 H	Head	X	X	X	X	X
3000 B	Body	X	X	X	X	X
3600 H	Head	37.24	3.14	3.5	±100	4.4
3600 B	Body	50.23	3.81	3.5	±100	4.1
5250 H	Head	35.05	4.65	3.5	±100	3.1
5250 B	Body	46.24	5.11	3.5	±100	2.9
5600 H	Head	34.95	5.06	3.5	±100	3.0
5600 B	Body	45.95	5.73	3.5	±100	2.4
5800 H	Head	34.57	5.27	3.5	±100	3.1
5800 B	Body	46.01	6.10	3.5	±100	2.6

NCL Calibration Laboratories

Division of APREL, Inc.

Boundary Effect:

Uncertainty resulting from the boundary effect is less than 2.1% for the distance between the tip of the probe and the tissue boundary, when less than 0.58mm.

Spatial Resolution:

The spatial resolution uncertainty is less than 1.5% for 4.9mm diameter probe.
 The spatial resolution uncertainty is less than 1.0% for 2.5mm diameter probe.

DAQ-PAQ Contribution

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 MΩ.

Probe Calibration Uncertainty

Uncertainty component	Tolerance (± %)	Probability distribution	Divisor	Standard uncertainty (± %)
Incident or forward power	2.5	R	√3	1.44
Reflected power	2	R	√3	1.15
Liquid conductivity measurement	1	R	√3	0.58
Liquid permittivity measurement	1	R	√3	0.58
Liquid conductivity deviation	1.5	R	√3	0.87
Liquid permittivity deviation	1.5	R	√3	0.87
Frequency deviation	2.25	R	√3	1.30
Field homogeneity	2.5	R	√3	1.44
Field-probe positioning	2.5	R	√3	1.44
Field-probe linearity	1.55	R	√3	0.89
Combined standard uncertainty		RSS		3.50