



Test report No:  
 NIE: 63721RRF.001A2

## Test report

USA FCC Part 15.247, 15.209  
 CANADA RSS-247, RSS-Gen

Radio Frequency Devices. Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz.

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

General Requirements and Information for the Certification of Radio Apparatus.

(*) Identification of item tested	A gateway device collecting data from sensors connected to the same Wirepas protocol mesh network as itself. The data is delivered from the device via cellular connection to a data center / cloud.
(*) Trademark	Thingsee Gateway Global
(*) Model and /or type reference tested	MTXG
Other identification of the product	FCC ID: 2AEU3TSGWGBL IC: 20236-TSGWGBL HW version: 0201 SW version: 2020.01.20.1
(*) Features	Passing sensor data to the internet. LED indicates operation mode. Device has a power button. Bluetooth, GPRS; EGPRS; LTE M1 band 2, 3, 4, 5, 8, 12, 13, 20, 26, 28; LTE NB1 band 2, 3, 4, 5, 8, 12, 13, 20, 26, 28
Manufacturer	HALTIAN PRODUCTS OY Yrttipellontie 1 D, 90230 Oulu, Finland
Test method requested, standard	USA FCC Part 15.247 (10-1-18 Edition): Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209 (10-1-18 Edition): Radiated emission limits; general requirements. CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 5 (April 2018). Guidance for Performing Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid Systems Devices Operating Under Section 15.247 of the FCC Rules. 558074 D01 Meas Guidance v05r02 dated April 2, 2019. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Summary	IN COMPLIANCE
Approved by (name / position & signature)	José Carlos Luque RF Lab. Supervisor
Date of issue	2020-04-03
Report template No	FDT08_22 (* "Data provided by the client")

## Index

Competences and guarantees .....	4
General conditions .....	4
Uncertainty .....	4
Data provided by the client .....	4
Usage of samples .....	5
Test sample description .....	6
Identification of the client .....	7
Testing period and place .....	7
Document history .....	7
Environmental conditions .....	8
Remarks and comments .....	8
Testing verdicts .....	10
Summary .....	10
Appendix A: Test results. Bluetooth Low Energy .....	11

## Competences and guarantees

---

DEKRA Testing and Certification is a testing laboratory accredited by the National Accreditation Body (ENAC - Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

## General conditions

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

## Uncertainty

---

Uncertainty (factor  $k=2$ ) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

## Data provided by the client

---

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample of MTXG is used as a gateway device collecting data from sensors connected to the same Wirepas protocol mesh network as itself. The data is delivered from MTXG via Cat M1/2G/NB-Io1 cellular connection to a data center / cloud.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

## Usage of samples

---

Samples undergoing test have been selected by: The client.

- Sample S/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
63721/002	Gateway	MTXG	--	2020/01/24
63721/007	AC/DC Adapter	SYS1561-1105	--	2020/01/24

---

Sample S/01 has undergone the following test(s): All CONDUCTED tests indicated in Appendix A.

- Sample S/02 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
63721/001	Gateway	MTXG	--	2020/01/24
63721/008	AC/DC Adapter	SYS1561-1105	--	2020/01/24

---

Sample S/02 has undergone the following test(s): All RADIATED tests indicated in Appendix A.

## Test sample description

Ports.....:	Port name and description	Cable			
		Specified max length [m]	Attached during test	Shielded	Coupled to patient <sup>(3)</sup>
	micro USB power supply		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Supplementary information to the ports.....:	-				
Rated power supply .....	Voltage and Frequency				
	<input checked="" type="checkbox"/>	DC: USB power supply Sunny SYS1561-1105 (micro USB) rc			
Rated Power .....	2,5W				
Clock frequencies.....:	32768Hz, 25MHz, 32MHz				
Other parameters .....	-				
Software version .....	2020.01.20.1				
Hardware version .....	0201				
Dimensions in cm (W x H x D) .....	105,8 x 62,9 x 16,2				
Mounting position .....	<input checked="" type="checkbox"/>	Wall/Ceiling mounted equipment			
Modules/parts.....:	Module/parts of test item		Type	Manufacturer	
	-				
Accessories (not part of the test item) .....	Description		Type	Manufacturer	
	-				
Documents as provided by the applicant.....:	Description		File name	Issue date	
	-				

<sup>(3)</sup> Only for Medical Equipment

## Identification of the client

HALTIAN PRODUCTS OY  
Yrttipellontie 1 D, 90230 Oulu, Finland

## Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2020-01-24
Date (finish)	2020-01-27

## Document history

Report number	Date	Description
63721RRF.001	2020-03-06	First release
63721RRF.001A1	2020-03-16	First modification: correction of HW version on front page. This modification of test report cancels and replaces the test report 63721RRF.001
63721RRF.001A2	2020-04-03	Second modification: correction of IC on front page. This modification of test report cancels and replaces the test report 63721RRF.001A1

## Environmental conditions

---

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar



## Remarks and comments

The tests have been performed by the technical personnel: Francisco José Alcaide and Nicolás Salguero.

Used instrumentation:

### Conducted Measurements:

	Last Calibration	Due Calibration
1. Shielded Room ETS LINDGREN S101	N.A.	N.A.
2. Signal and Spectrum Analyzer ROHDE AND SCHWARZ FSV40	2019/09	2021/09

### Radiated Measurements:

	Last Calibration	Due Calibration
1. Semianechoic Absorber Lined Chamber ETS LINDGREN FACT 3 200 STP	N.A.	N.A.
2. Shielded Room ETS LINDGREN S101	N.A.	N.A.
3. EMI Test Receiver 7 GHz ROHDE AND SCHWARZ ESR7	2019/10	2021/10
4. RF Pre-amplifier, G>38dB 30MHz-6GHz BONN ELEKTRONIK BLNA 0360-01N	2019/09	2020/09
5. Biconical/Log Antenna 30 MHz - 6 GHz ETS LINDGREN 3142E	2017/04	2020/04
6. AC Power Supply 135/270 V, 5/10/20/40 A ELGAR CS-AC35(351SL)	2019/09	2022/09
7. Spectrum Analyzer ROHDE AND SCHWARZ FSW50	2018/02	2020/02
8. RF Pre-amplifier, 40 dB ,1-18 GHz BONN ELEKTRONIK BLMA 0118-1M	2019/04	2020/04
9. Low Noise Amplifier G>30dB, 18 - 40 GHz BONN ELEKTRONIK BLMA 1840-1M	2018/02	2020/02
10. Broadband Horn antenna 1-18 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9120 D	2019/11	2022/11
11. Broadband Horn Antenna 18 - 40 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9170	2018/07	2021/07

## Testing verdicts

Not applicable:	N/A
Pass:	P
Fail:	F
Not measured:	N/M

## Summary

### 1. Bluetooth Low Energy

FCC PART 15.247 PARAGRAPH			
Requirement – Test case		Verdict	Remark
15.247 (a) (2) / RSS-247 5.2. (a)	6 dB Bandwidth	P	
15.247 (b) / RSS-247 5.4. (d)	Maximum output power and antenna gain	P	
15.247 (d) / RSS-247 5.5	Emission limitations conducted (Transmitter)	P	
15.247 (d) / RSS-247 5.5.	Band-edge emissions compliance (Transmitter)	P	
15.247 (e) / RSS-247 5.2. (b)	Power spectral density	P	
15.247 (d) / RSS-247 5.5.	Emission limitations radiated (Transmitter)	P	
<u>Supplementary information and remarks:</u>			
None.			

## Appendix A: Test results. Bluetooth Low Energy

## INDEX

TEST CONDITIONS .....	13
Occupied Bandwidth .....	15
FCC 15.247 (a)(2) / RSS-247 5.2 (a) 6 dB Bandwidth .....	17
FCC 15.247 (b) / RSS-247 5.4 (d) Maximum output power and antenna gain .....	19
FCC 15.247 (d) / RSS-247 5.5 Band-edge emissions compliance (Transmitter) .....	22
FCC 15.247 (e) / RSS-247 5.2 (b) Power spectral density.....	24
FCC 15.247 (d) / RSS-247 5.5 Emission limitations radiated (Transmitter).....	27

## TEST CONDITIONS

### POWER SUPPLY (V):

V nominal:	5 Vdc
Type of Power Supply:	USB.
Type of Antenna:	Internal.
Maximum Declared Antenna Gain:	+3 dBi

### TEST FREQUENCIES:

Low Channel:	2402 MHz
Middle Channel:	2440 MHz
High Channel:	2480 MHz

### CONDUCTED MEASUREMENTS

The equipment under test was set up in a shielded room and it is directly connected to the spectrum analyzer.



### RADIATED MEASUREMENTS


All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Bilog antenna for the range between 30 MHz to 1000 MHz) is situated at a distance of 3 m and at a distance of 1m for the frequency range 1 GHz-26 GHz (1 GHz-18 GHz Double ridge horn antenna and 18 GHz-40 GHz horn antenna).

For radiated emissions in the range 1 GHz-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.


The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height (Bilog antenna and Double ridge horn antenna) was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

Radiated measurements setup from 30 MHz to 1 GHz:

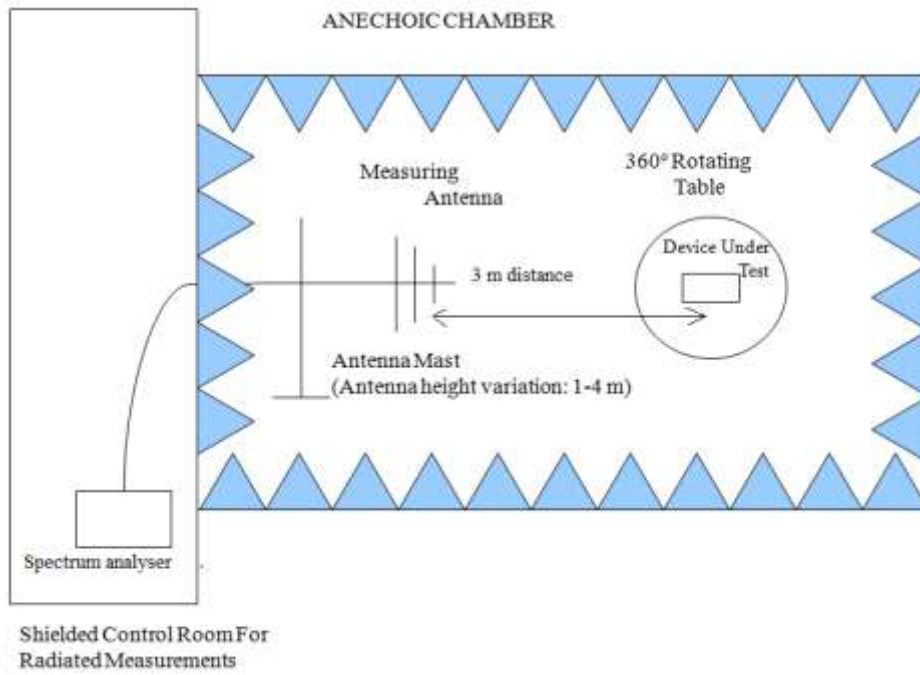

Radiated measurements setup  $f > 1$  GHz:

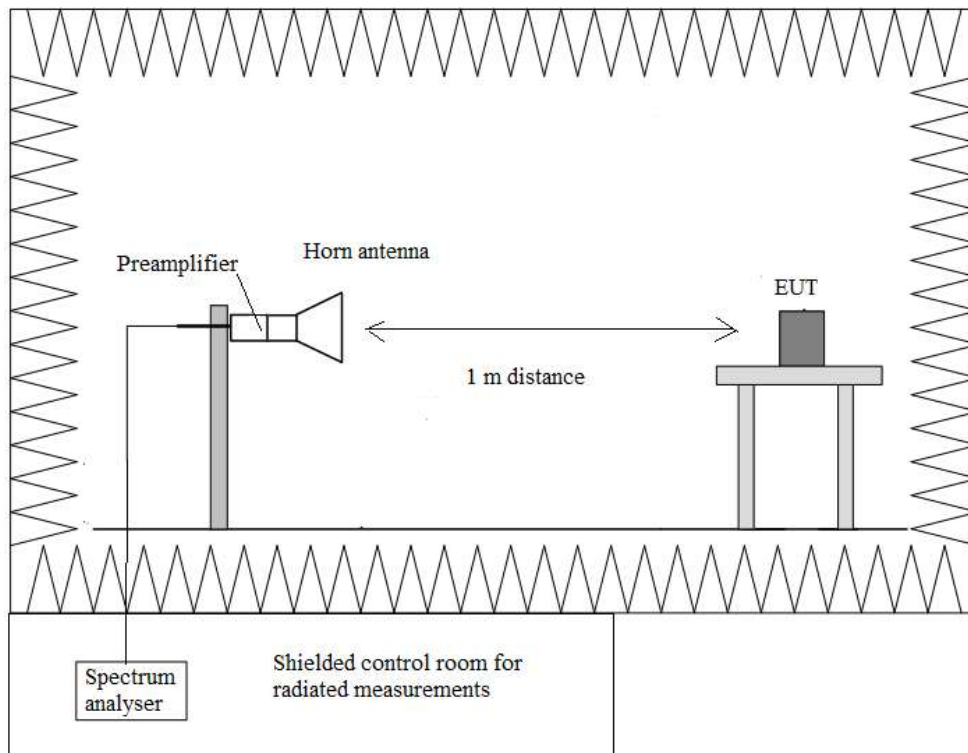


## Occupied Bandwidth


### RESULTS:

	Low Channel 2402 MHz	Middle Channel 2440 MHz	High Channel 2480 MHz
99% bandwidth (MHz)	1.0467	1.0497	1.0521
-26 dB bandwidth (MHz)	1.25712	1.26233	1.26369
Measurement uncertainty (kHz)	<± 1.80		


### - Low Channel:

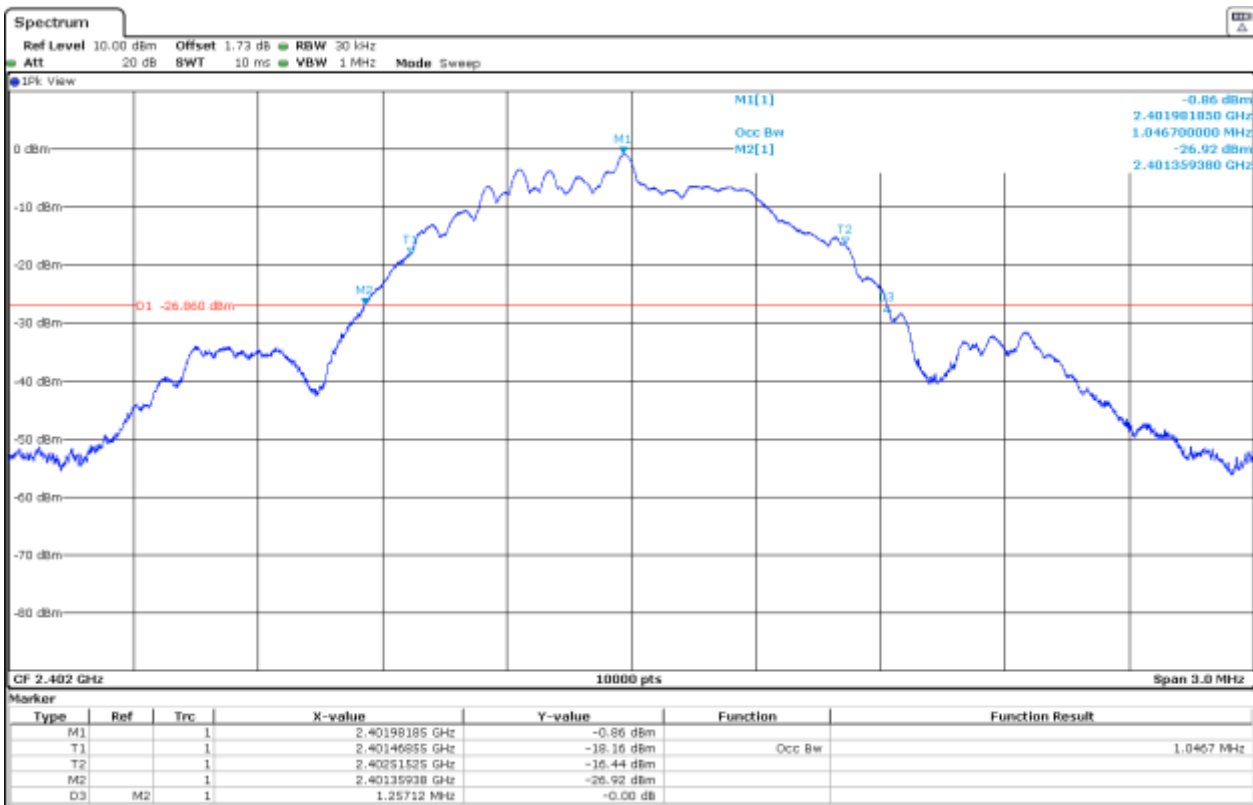

- Middle Channel:

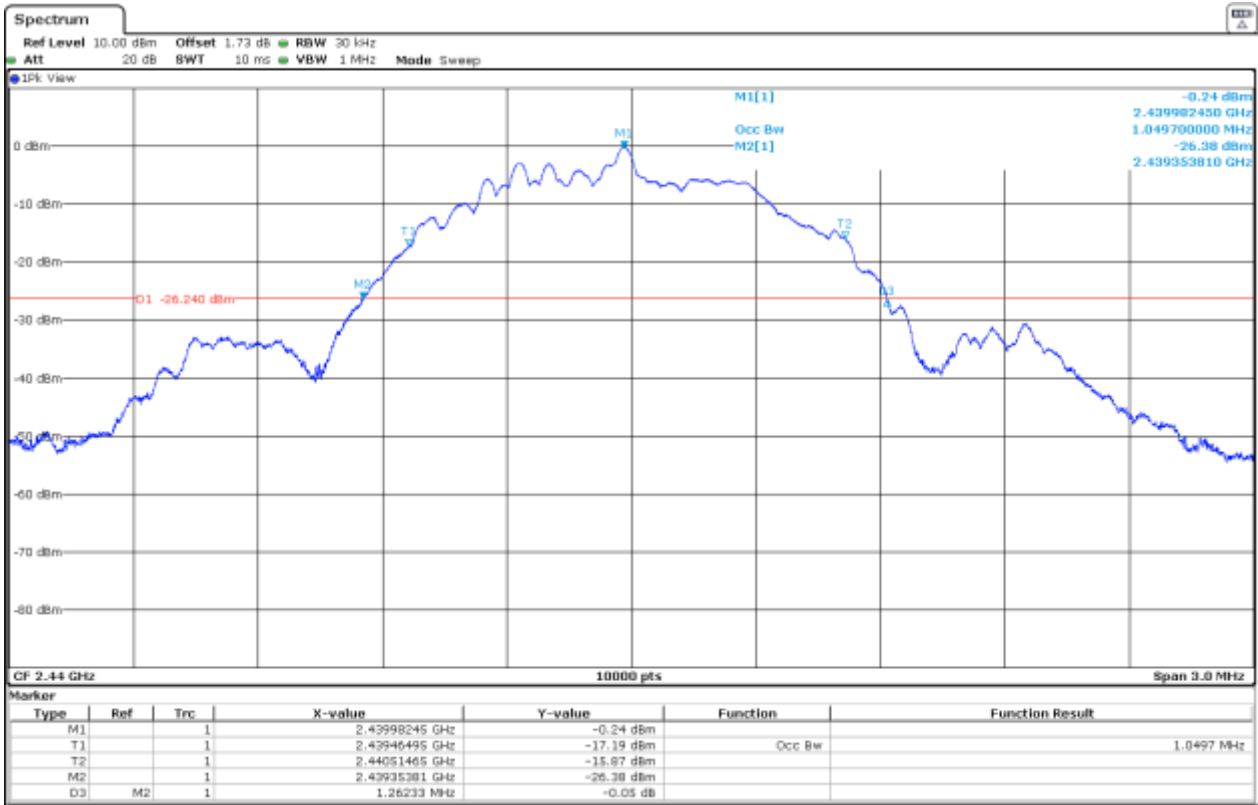

- High Channel:

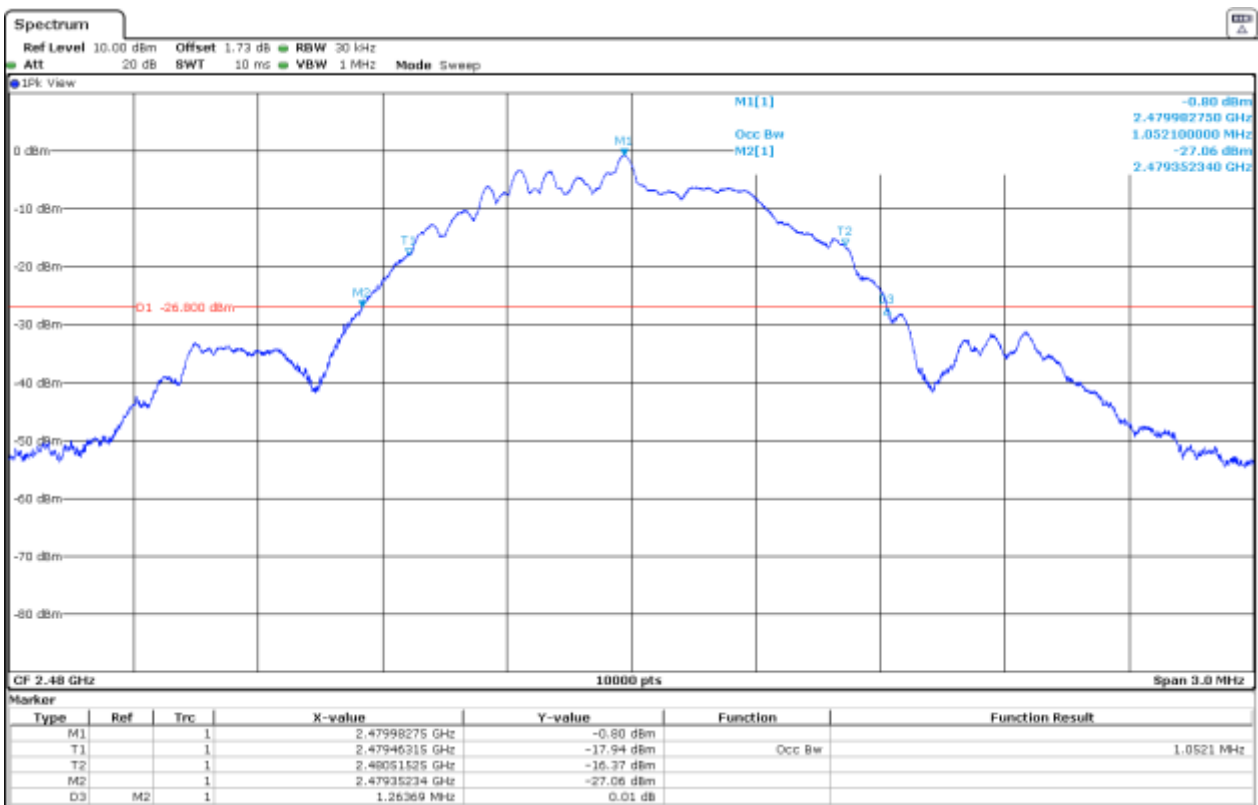



## FCC 15.247 (a)(2) / RSS-247 5.2 (a) 6 dB Bandwidth

**SPECIFICATION:**


The minimum 6 dB bandwidth shall be at least 500 kHz.

**RESULTS:**


	Low Channel 2402 MHz	Middle Channel 2440 MHz	High Channel 2480 MHz
6 dB Spectrum bandwidth (kHz)	718.02	722.76	720.37
Measurement uncertainty (kHz)	<±2.50		

Verdict: PASS


- Low Channel:

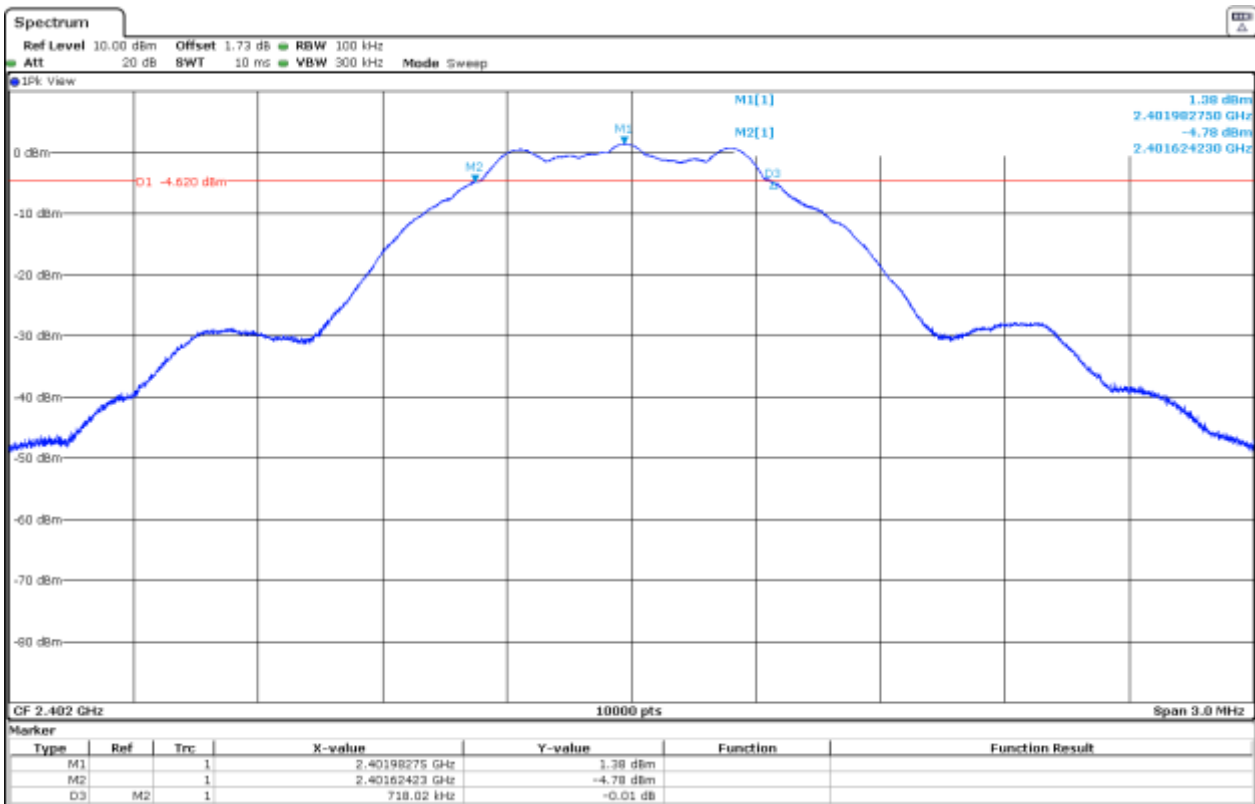

- Middle Channel:

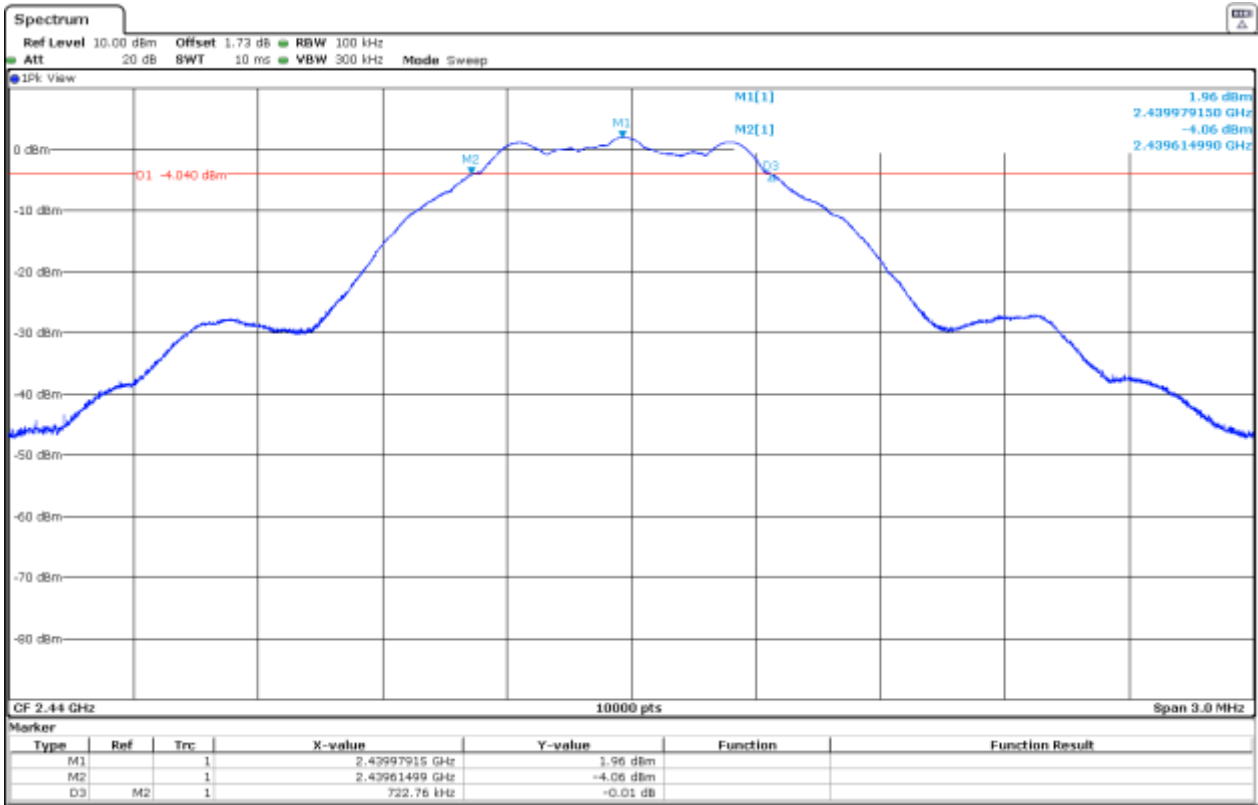

- High Channel:

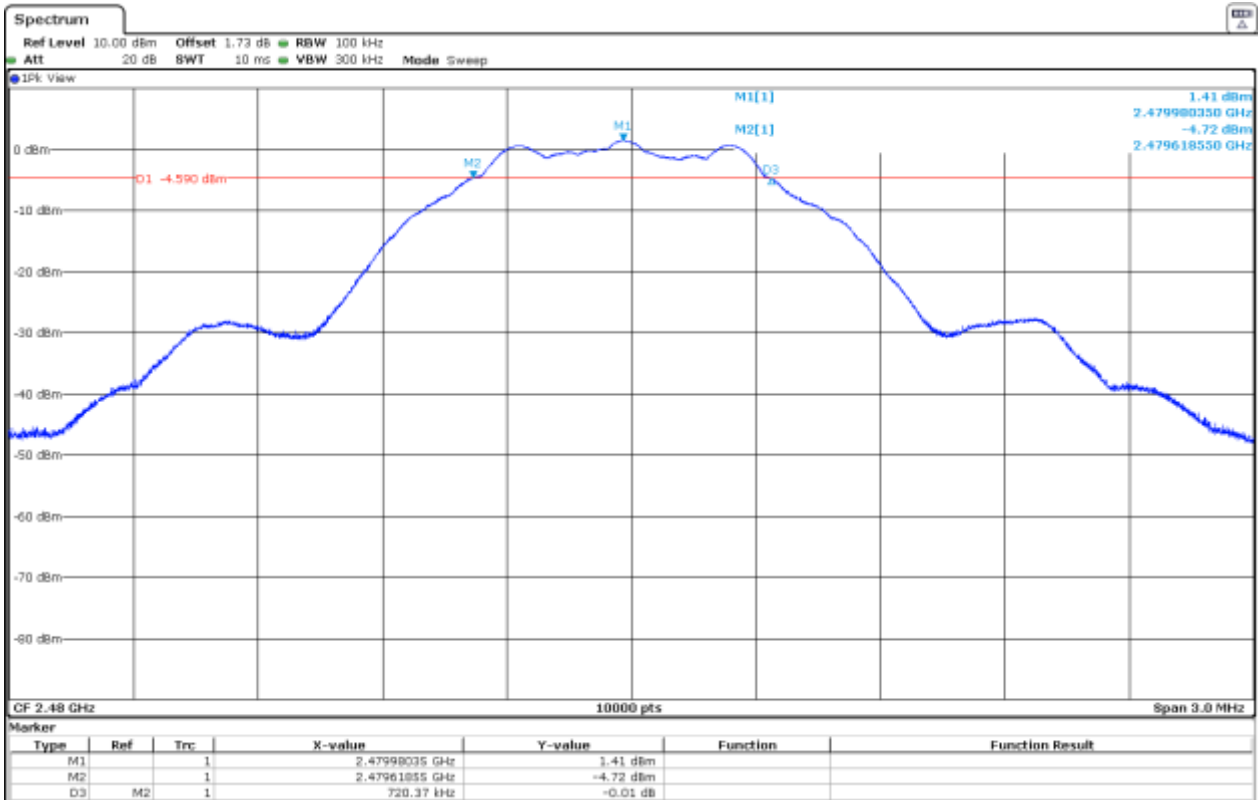

## FCC 15.247 (b) / RSS-247 5.4 (d) Maximum output power and antenna gain

### SPECIFICATION:

For systems using digital modulation in the 2400-2483.5 MHz band: 1 watt (30 dBm).

The e.i.r.p. shall not exceed 4 W (36 dBm) (Canada).

### RESULTS:

The maximum peak conducted output power level in the fundamental emission was measured using the method according to point 11.9.1.1 "RBW  $\geq$  DTS bandwidth" of ANSI C.63.10-2013.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.


Maximum Declared Antenna Gain: +3 dBi

	Low Channel 2402 MHz	Middle Channel 2440 MHz	High Channel 2480 MHz
Maximum Conducted Power (dBm)	1.45	2.27	1.57
Maximum EIRP Power (dBm)	4.45	5.27	4.57
Measurement uncertainty (dB)	< $\pm$ 1.20		


The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Verdict: PASS


- Low Channel:

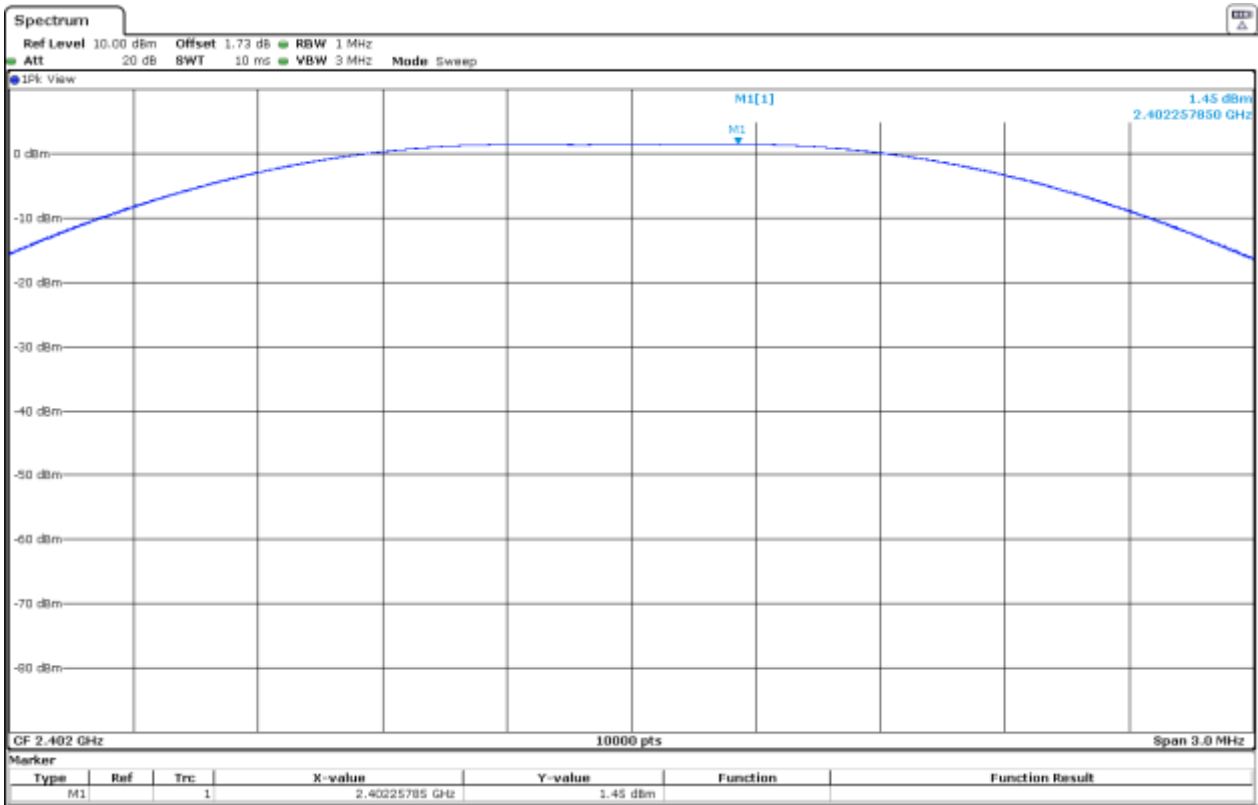

- Middle Channel:

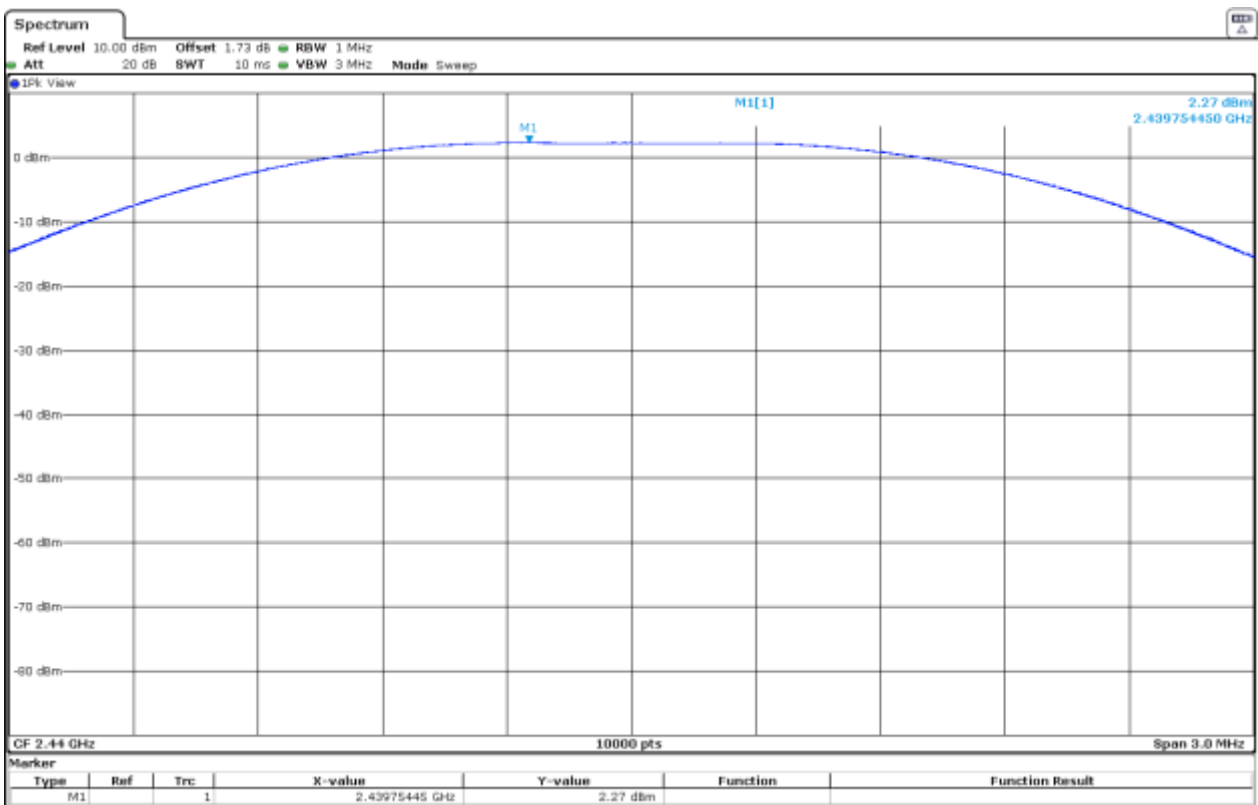

- High Channel:

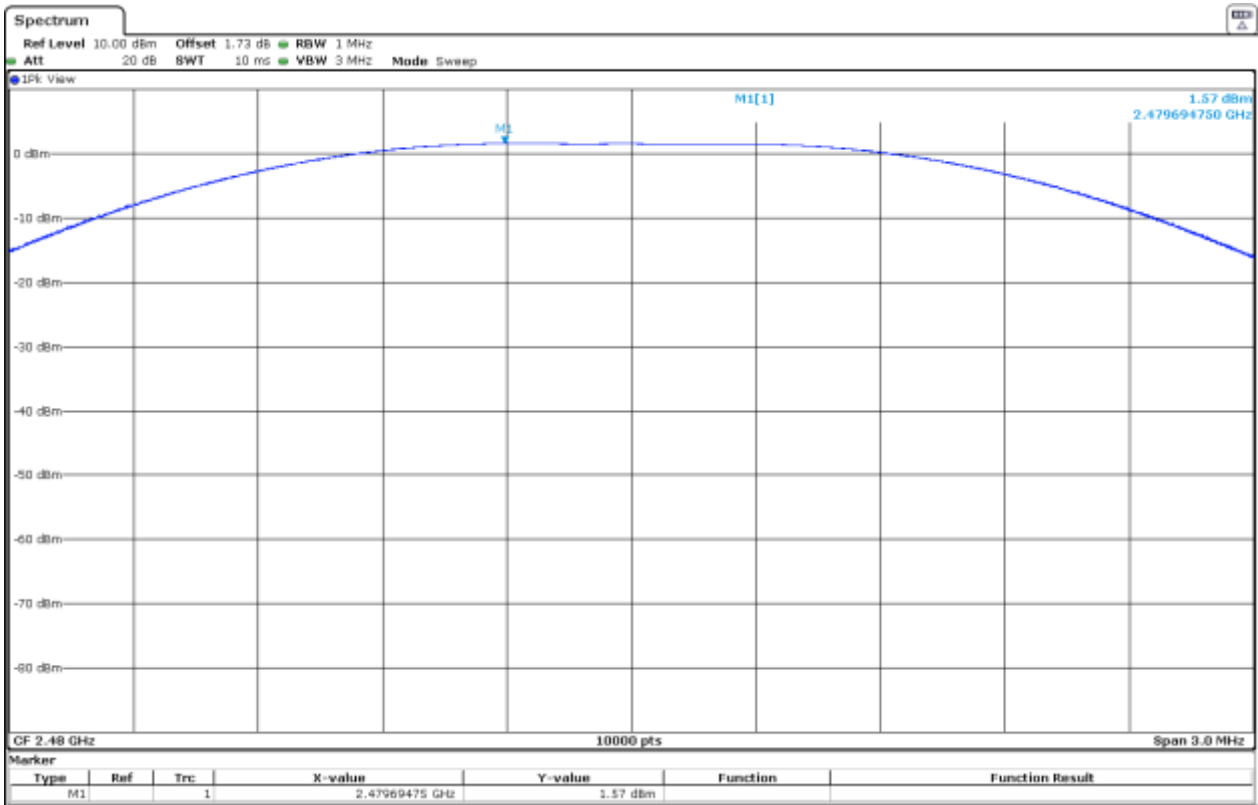


## FCC 15.247 (d) / RSS-247 5.5 Band-edge emissions compliance (Transmitter)

### SPECIFICATION:

In any 100 kHz bandwidths outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


### RESULTS:

- Low Channel:

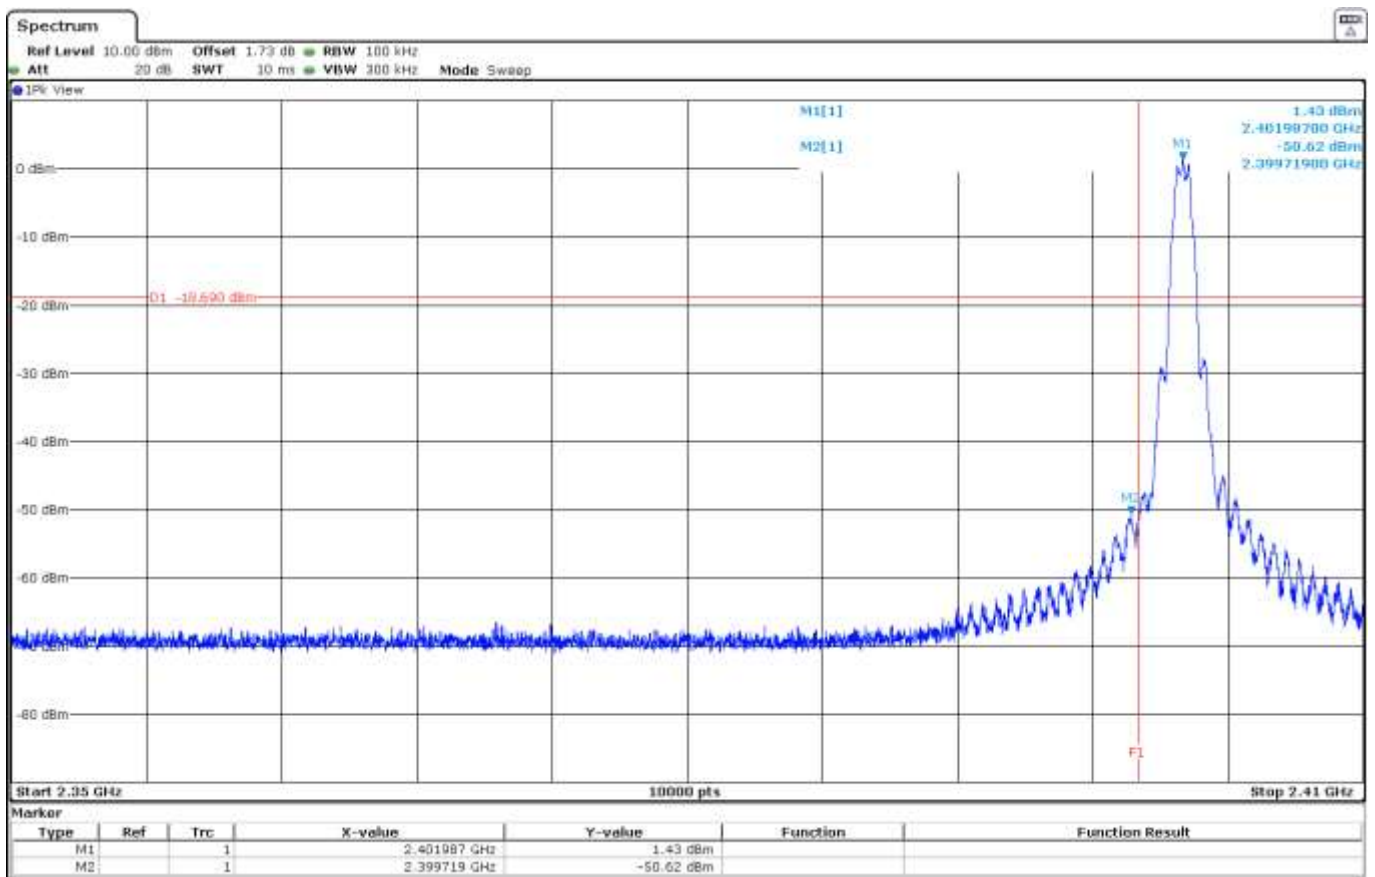

Verdict: PASS

- High Channel:

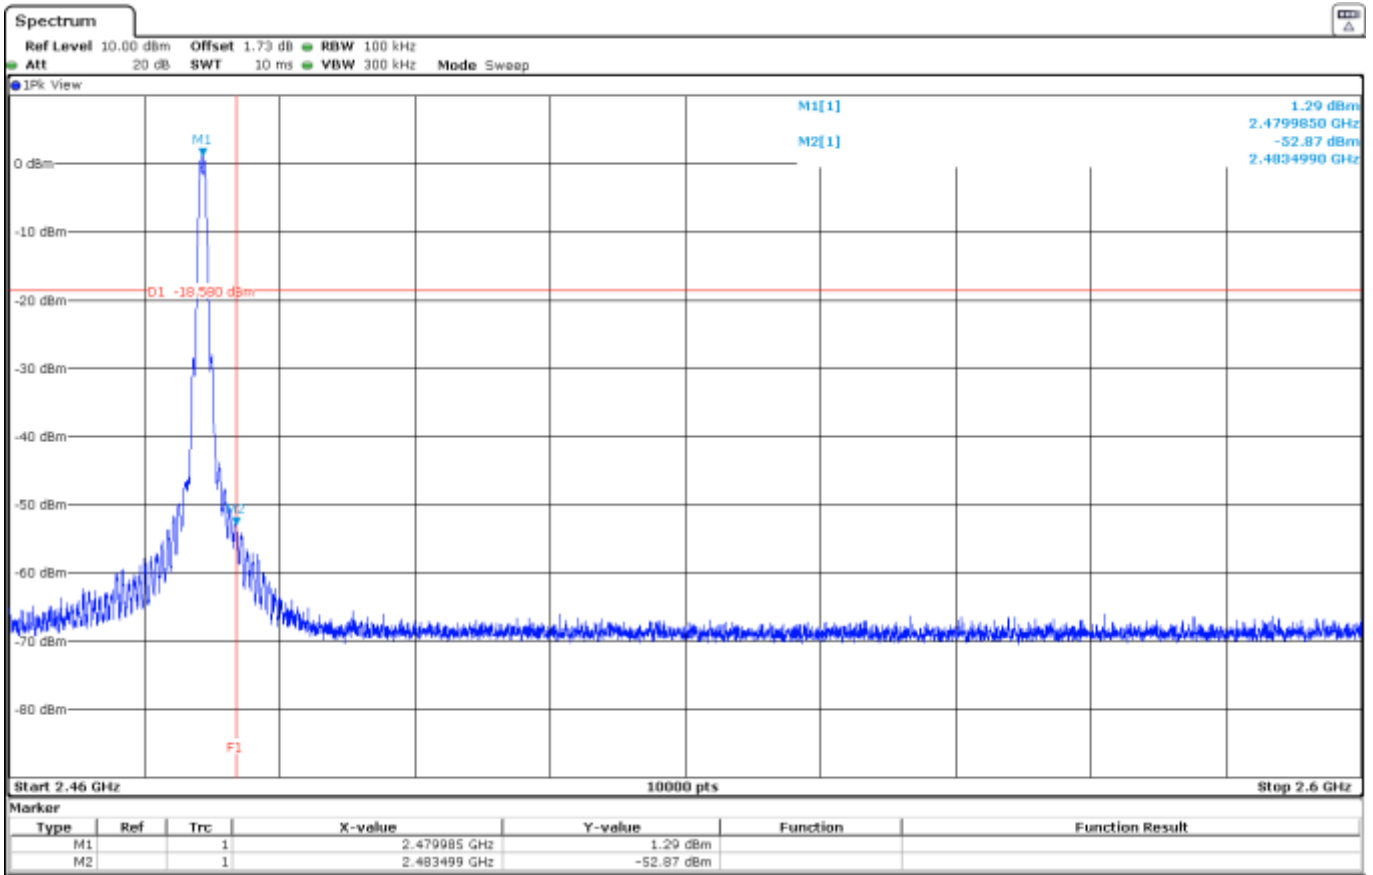

Verdict: PASS

Measurement uncertainty (dB)	<±1.20
------------------------------	--------

## FCC 15.247 (e) / RSS-247 5.2 (b) Power spectral density

### SPECIFICATION:

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### RESULTS:


The maximum power spectral density level in the fundamental emission was measured using the method according to point 11.10.2." Method PKPSD (peak PSD)" of ANSI C.63.10-2013.

	Low Channel 2402 MHz	Middle Channel 2440 MHz	High Channel 2480 MHz
Power Spectral Density (dBm)	1.31	1.92	1.42
Measurement uncertainty (dB)	<±1.20		


Verdict: PASS




- Low Channel:

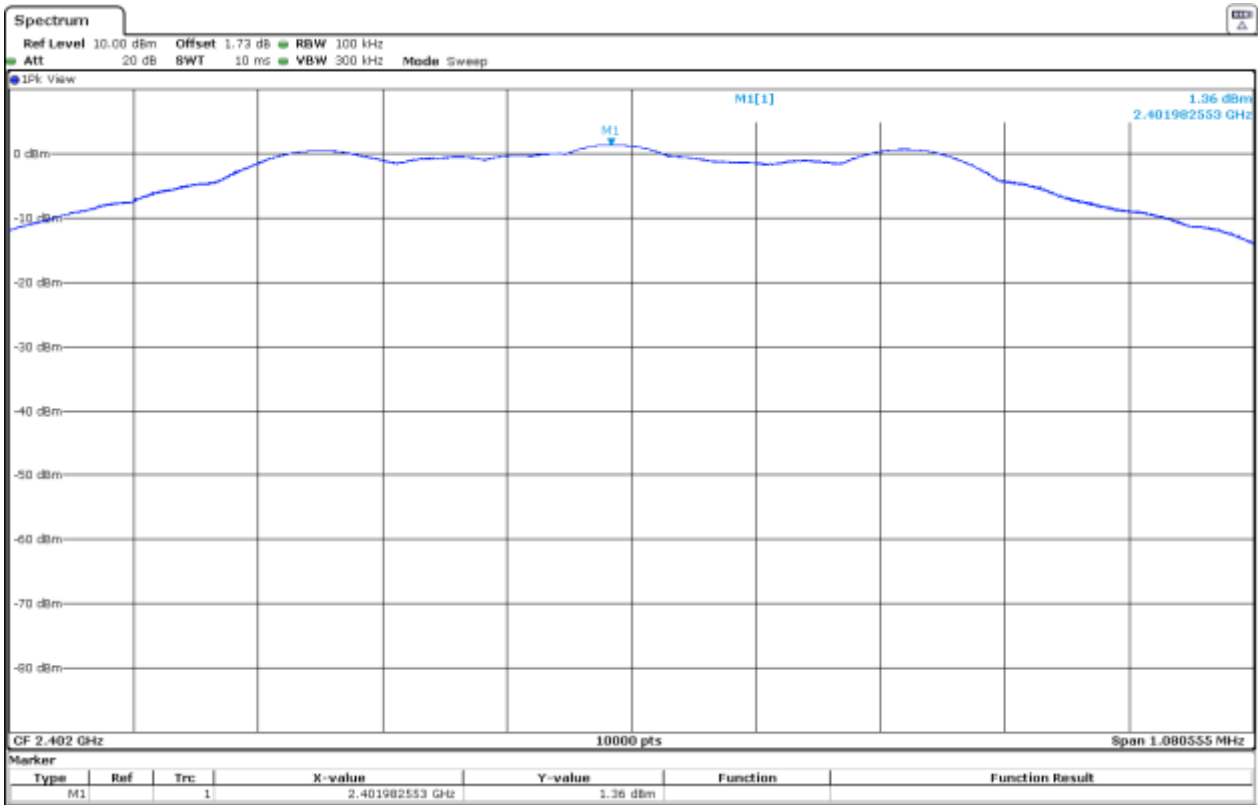

- Middle Channel:

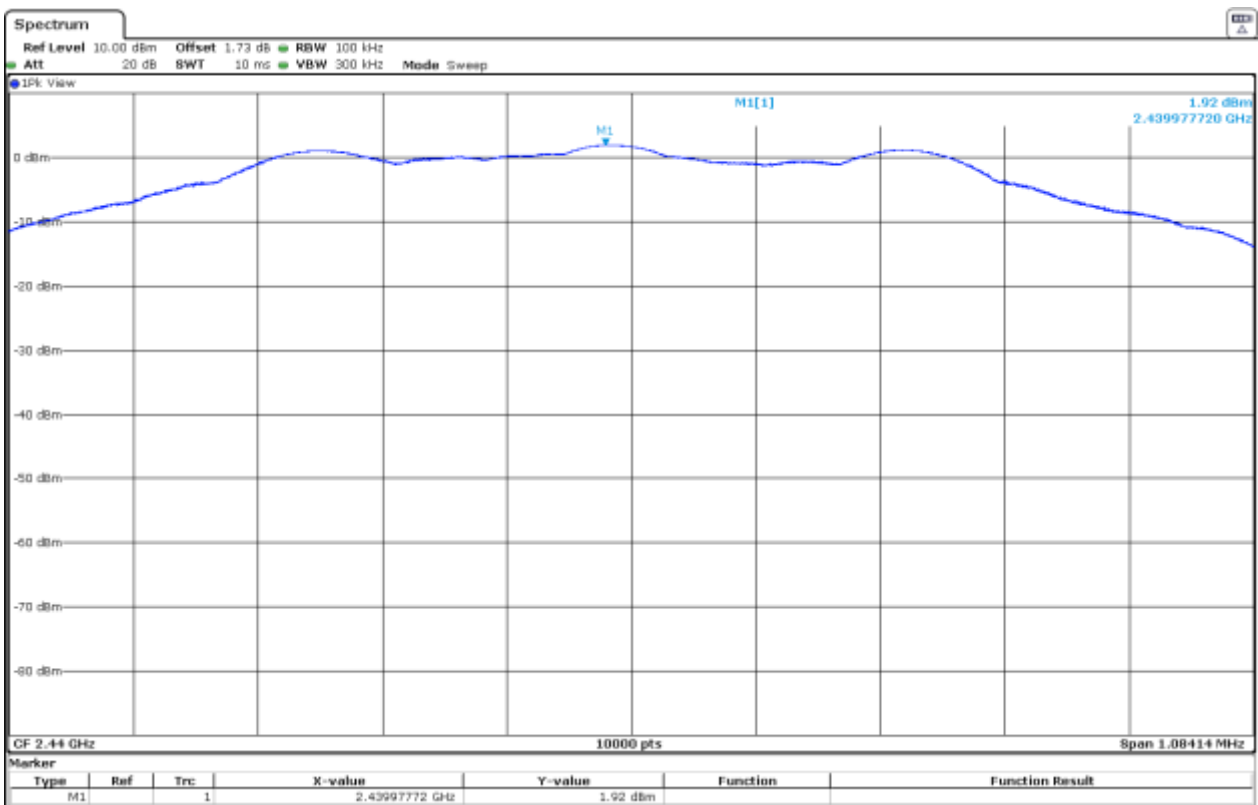

- High Channel:

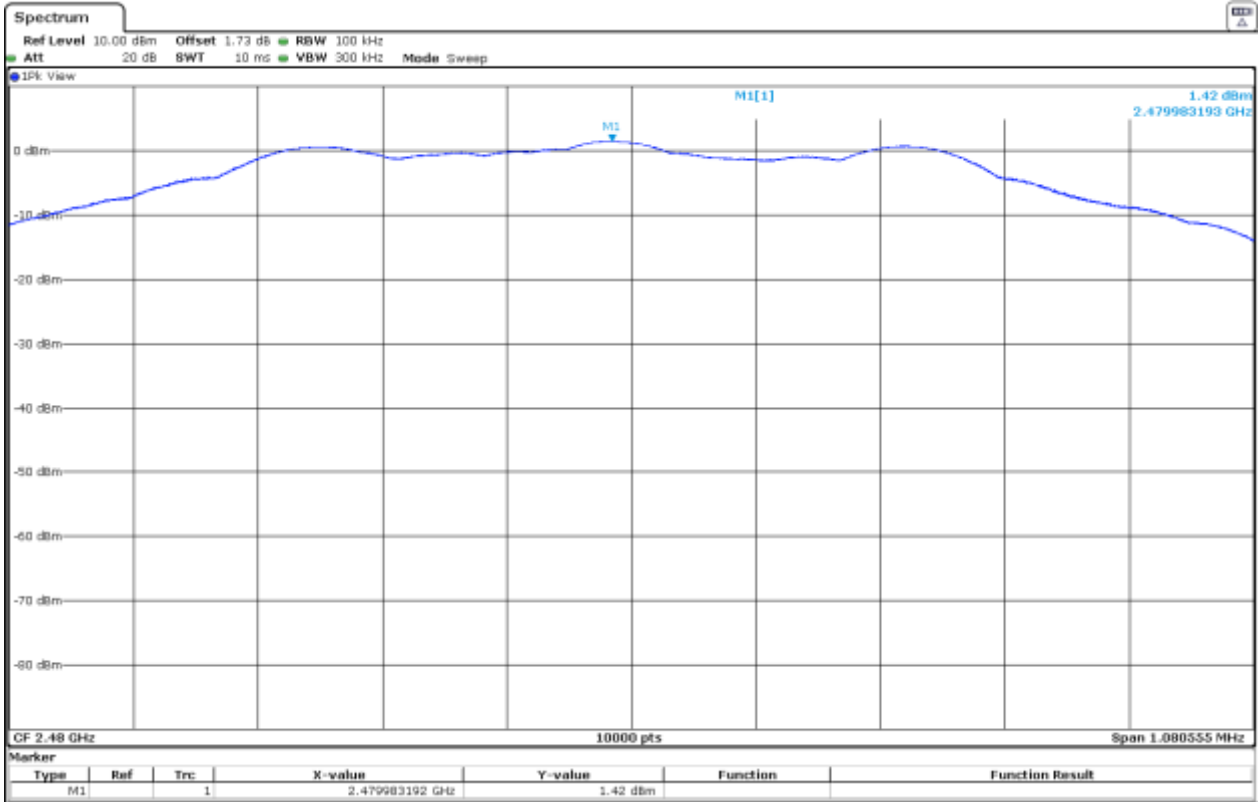

## FCC 15.247 (d) / RSS-247 5.5 Emission limitations radiated (Transmitter)

### SPECIFICATION:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)/RSS-Gen):

Frequency Range (MHz)	Field strength ( $\mu\text{V/m}$ )	Field strength (dB $\mu\text{V/m}$ )	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 10000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247: Attenuation below the general field strength limits specified in RSS-Gen is not required.

### RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-1000 MHz and at distance of 1m for the frequency range 1 GHz-26 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

### **Frequency range 30 MHz - 1 GHz:**

The spurious frequencies do not depend on the operating channel.

Spurious frequencies detected at less than 20 dB below the limit:

Spurious frequency (MHz)	Detector	Emission Level (dB $\mu\text{V/m}$ )	Polarization	Measurement Uncertainty (dB)
32.021	Quasi peak	28.2	H	< $\pm$ 3.88
66.909	Quasi peak	26.9	H	< $\pm$ 3.88

**Frequency range 1 - 26 GHz:**

The results in the next tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

Spurious signals with peak levels above the average limit (54 dBµV/m at 3 m) are measured with average detector for checking compliance with the average limit.

- LOW CHANNEL. Spurious frequencies detected at less than 20 dB below the limit:

Spurious frequency (GHz)	Detector	Emission Level (dBµV/m)	Polarization	Measurement Uncertainty (dB)
2.36554	Peak	46.87	H	<± 4.88

- MIDDLE CHANNEL.

No spurious frequencies detected at less than 20 dB below the limit.

- HIGH CHANNEL. Spurious frequencies detected at less than 20 dB below the limit:


Spurious frequency (GHz)	Detector	Emission Level (dBµV/m)	Polarization	Measurement Uncertainty (dB)
2.48354373	Peak	60.61	V	<± 3.04
	Average	39.44		<± 3.04

Verdict: PASS

**FREQUENCY RANGE 30 MHz - 1 GHz:**


The spurious frequencies do not depend on the operating channel.

This plot is valid for the Low, Middle and High Channels.

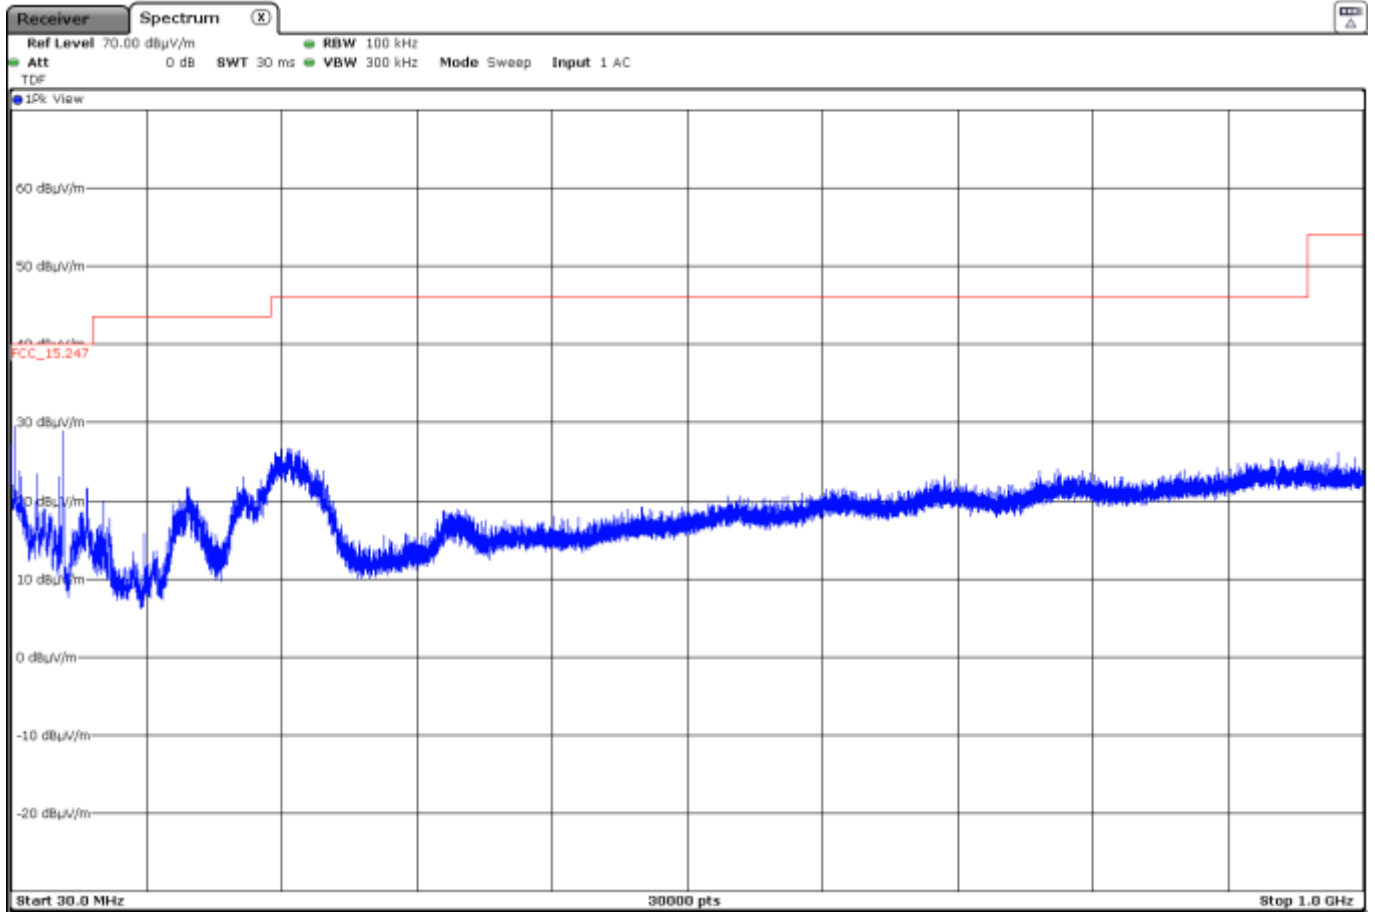


### FREQUENCY RANGE 1 - 3 GHz:

- Low Channel:

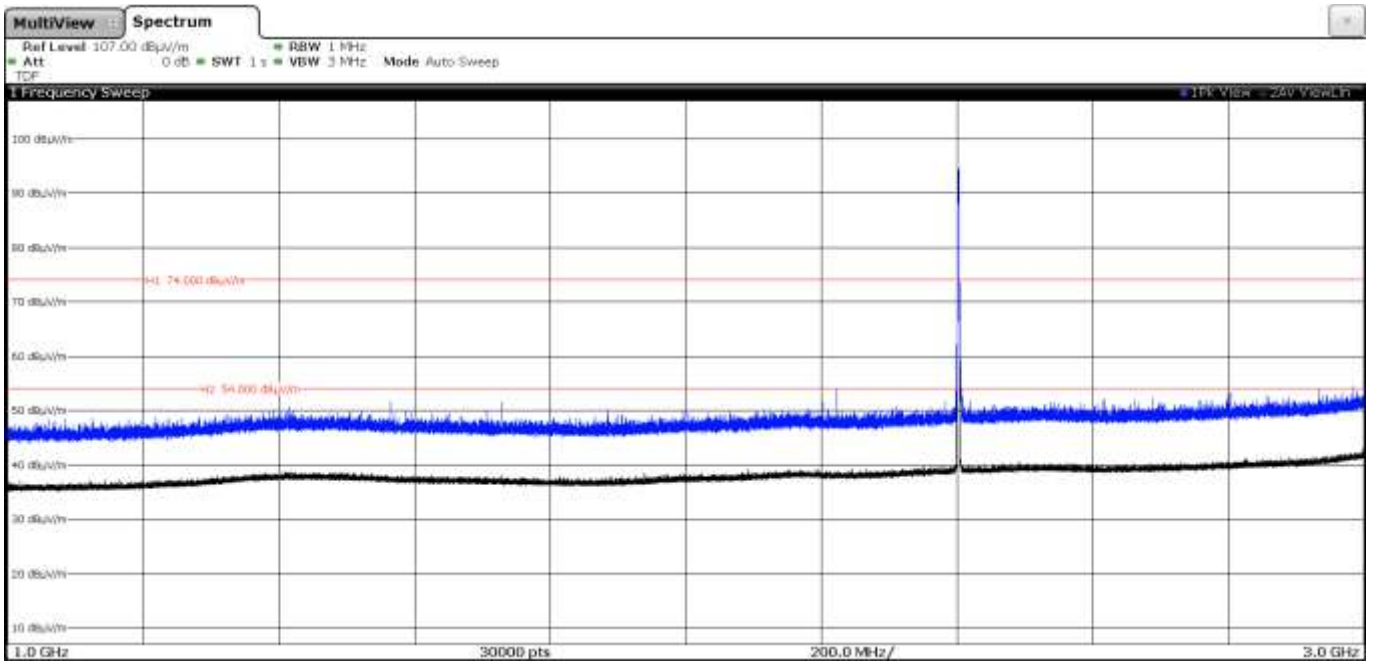


The peak above the limit is the carrier frequency.

- Middle Channel:

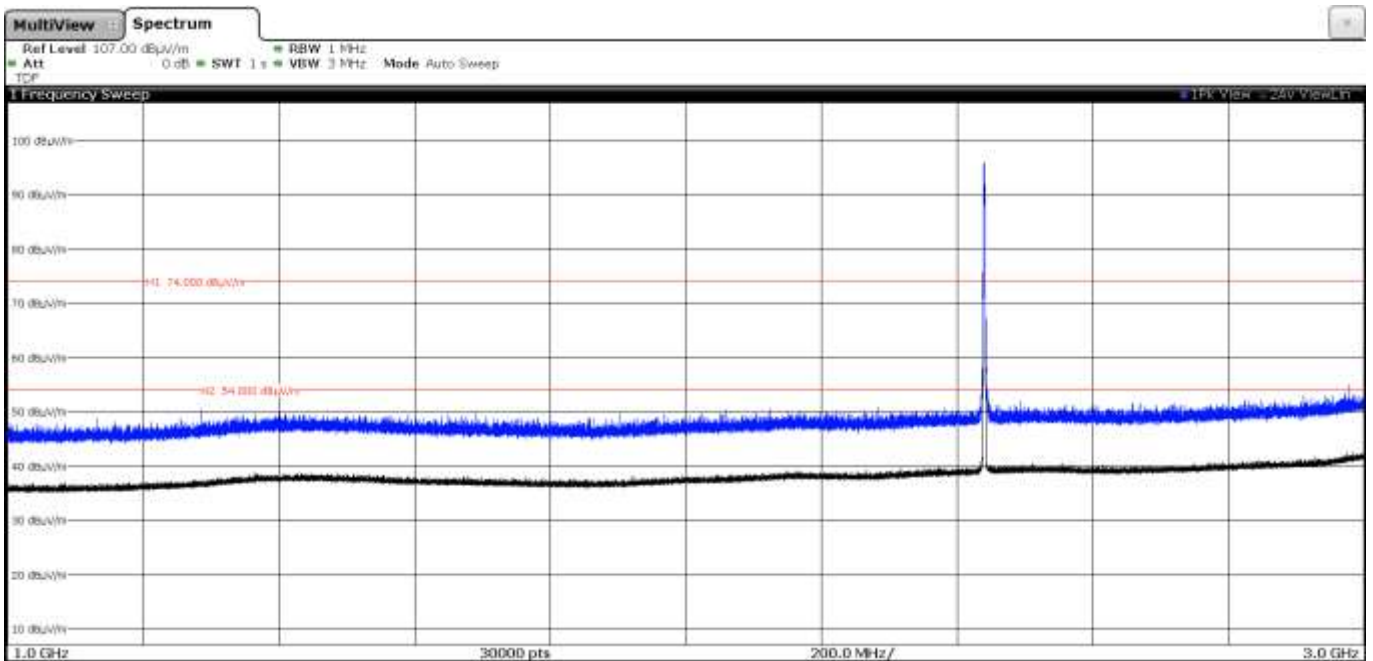

The peak above the limit is the carrier frequency.


- High Channel:

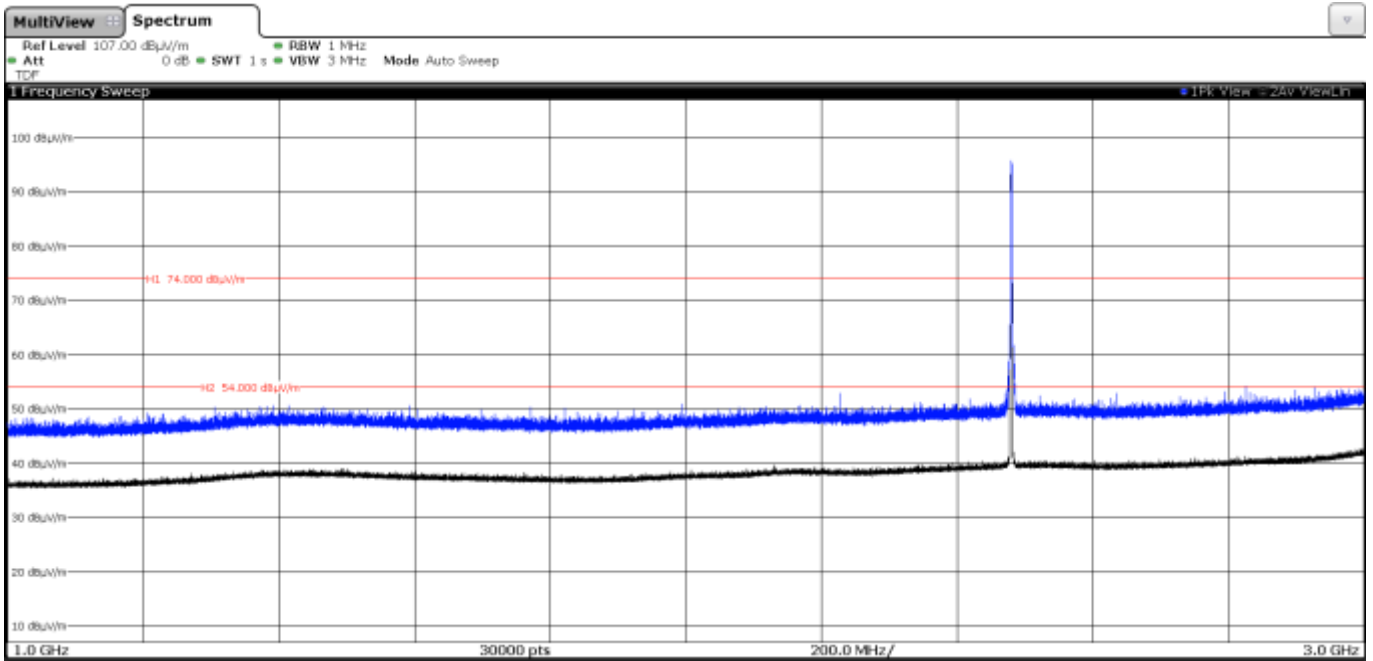


The peak above the limit is the carrier frequency.

### FREQUENCY RANGE 3 - 17 GHz:

- Low Channel:

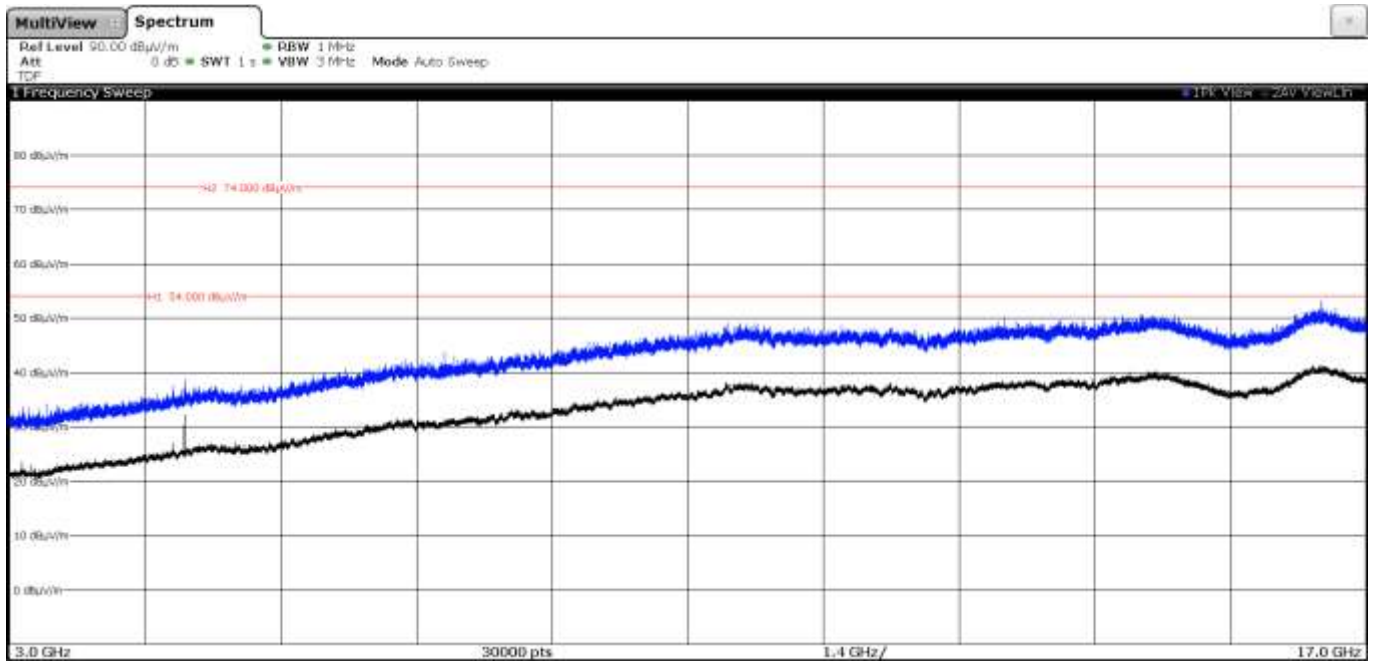


- Middle Channel:

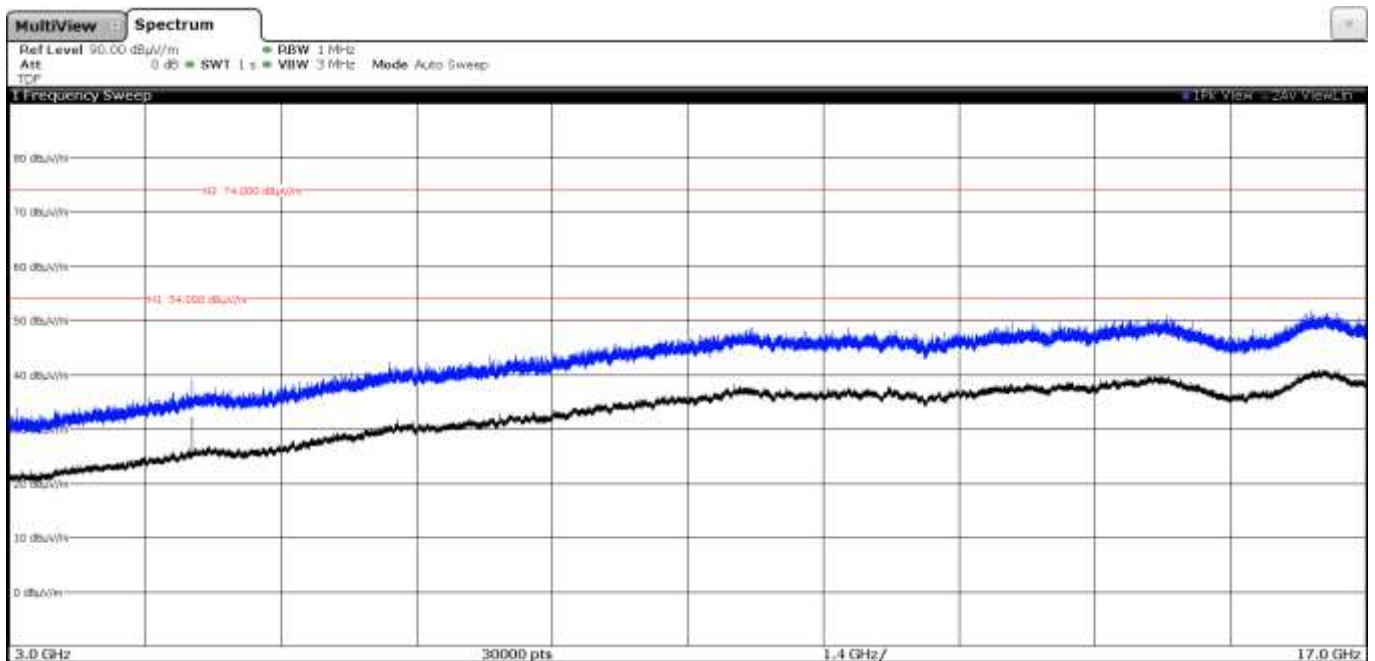




- High Channel:

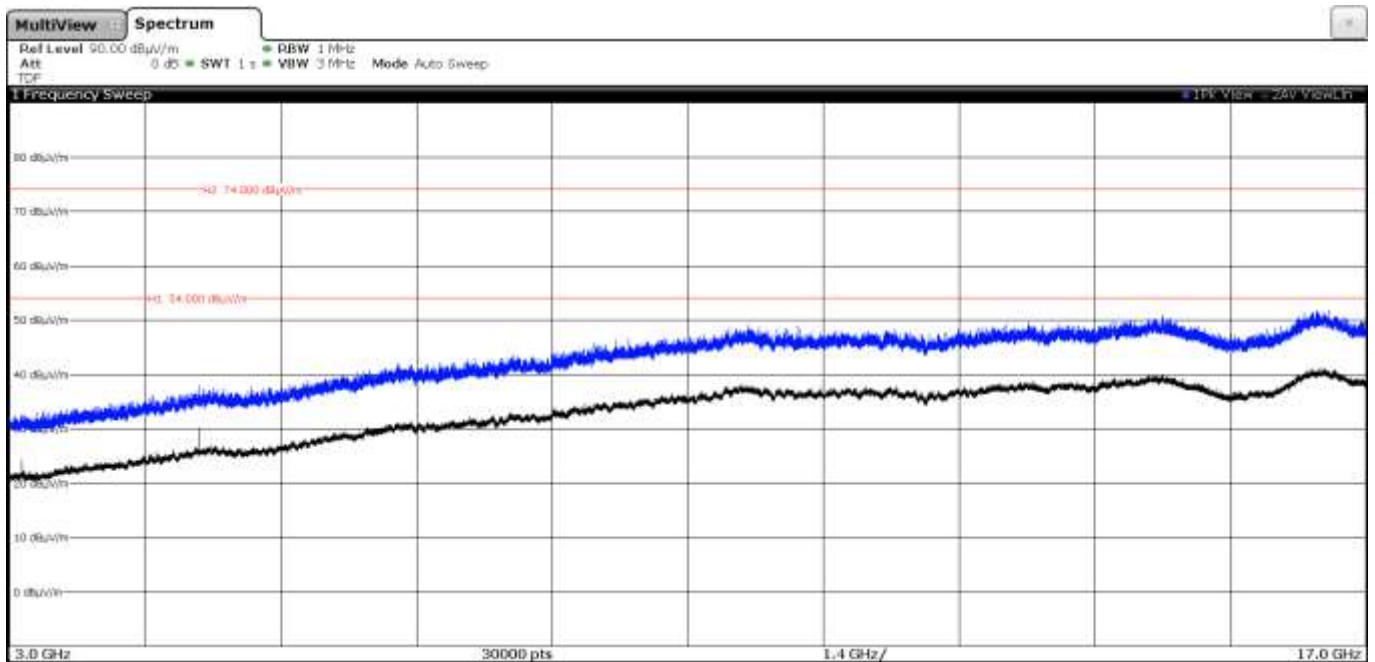

### FREQUENCY RANGE 17 - 26 GHz:


The spurious frequencies do not depend on the operating channel.

This plot is valid for the Low, Middle and High Channels.

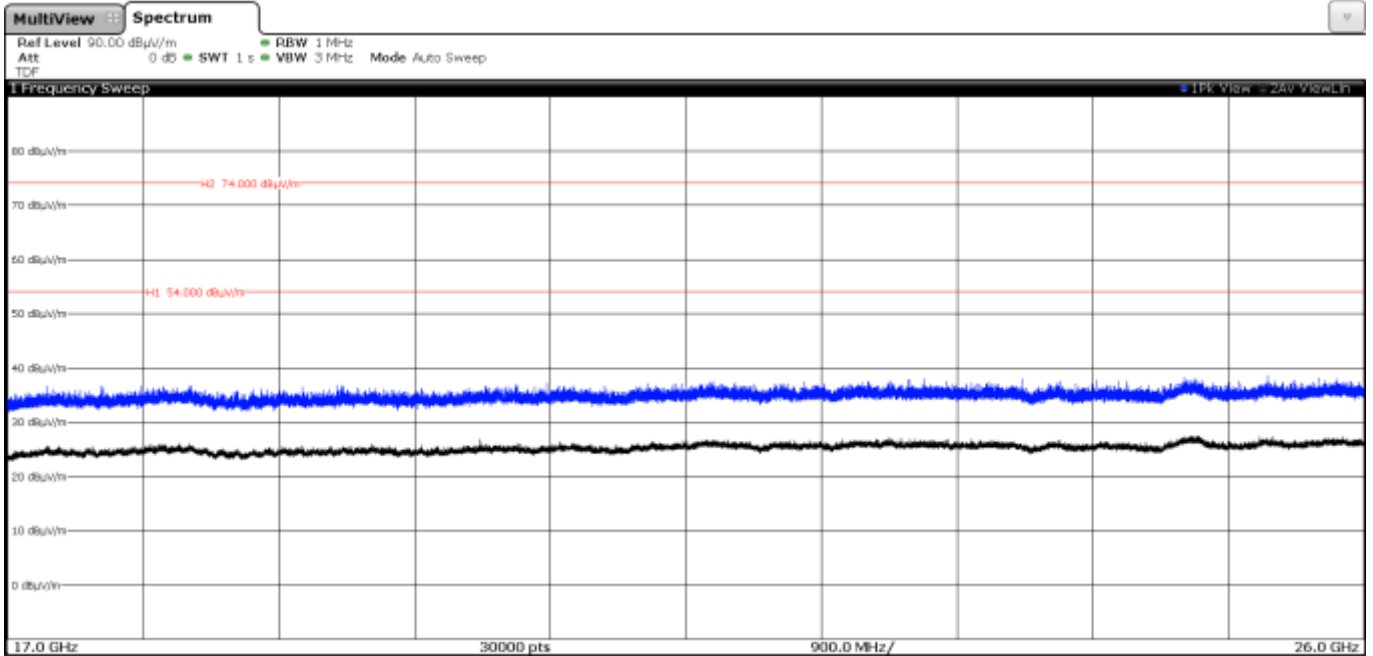


### FREQUENCY RANGE 2.31-2.39 GHz (Restricted Band):


- Low Channel:

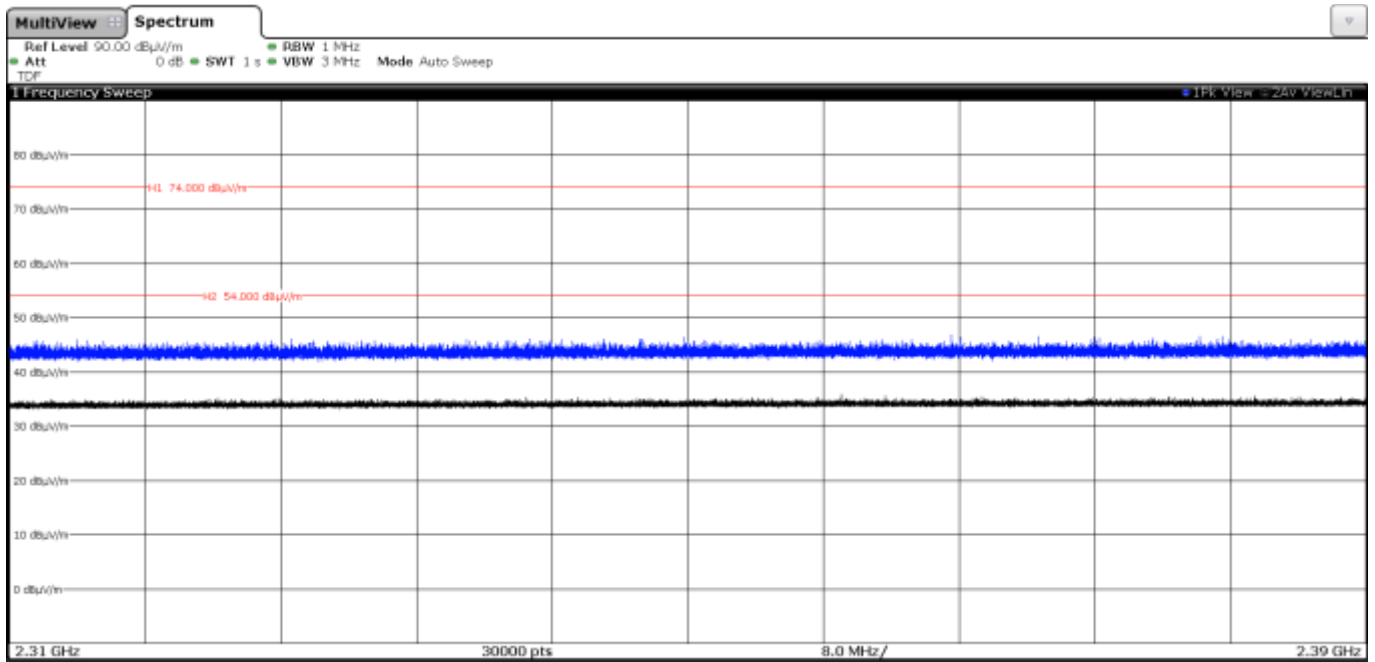

- Middle Channel:

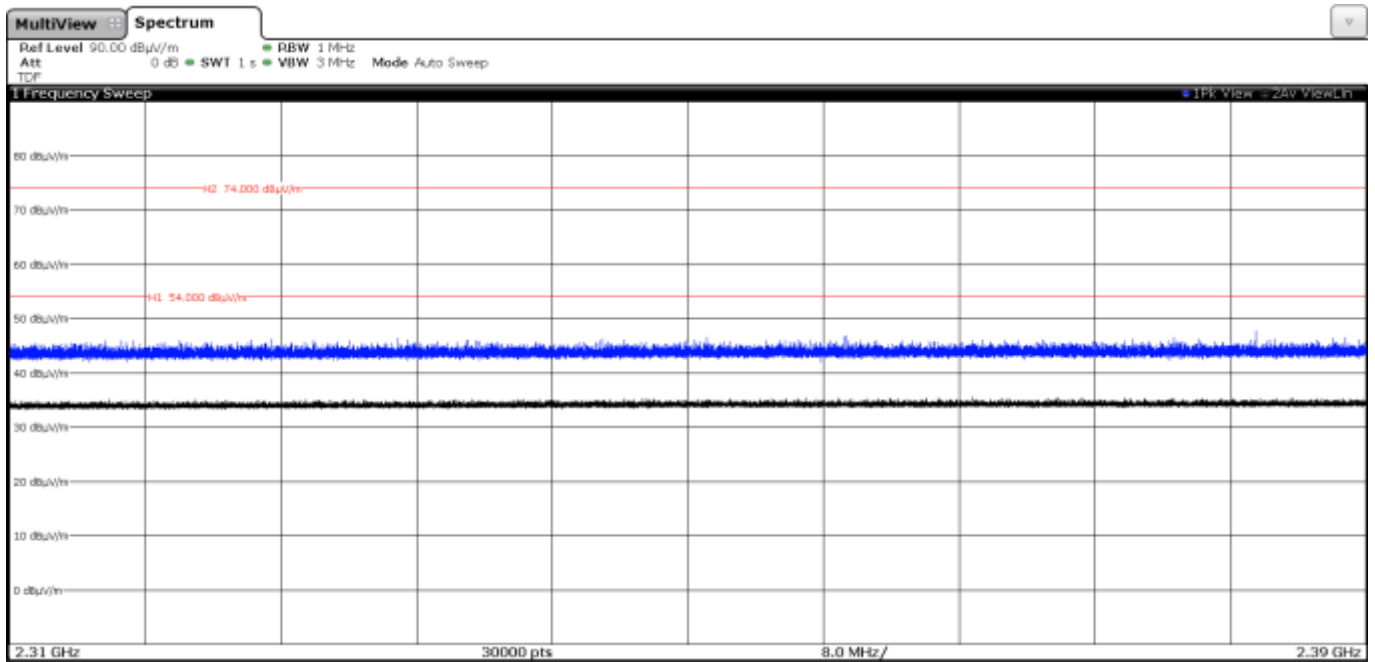


- High Channel:

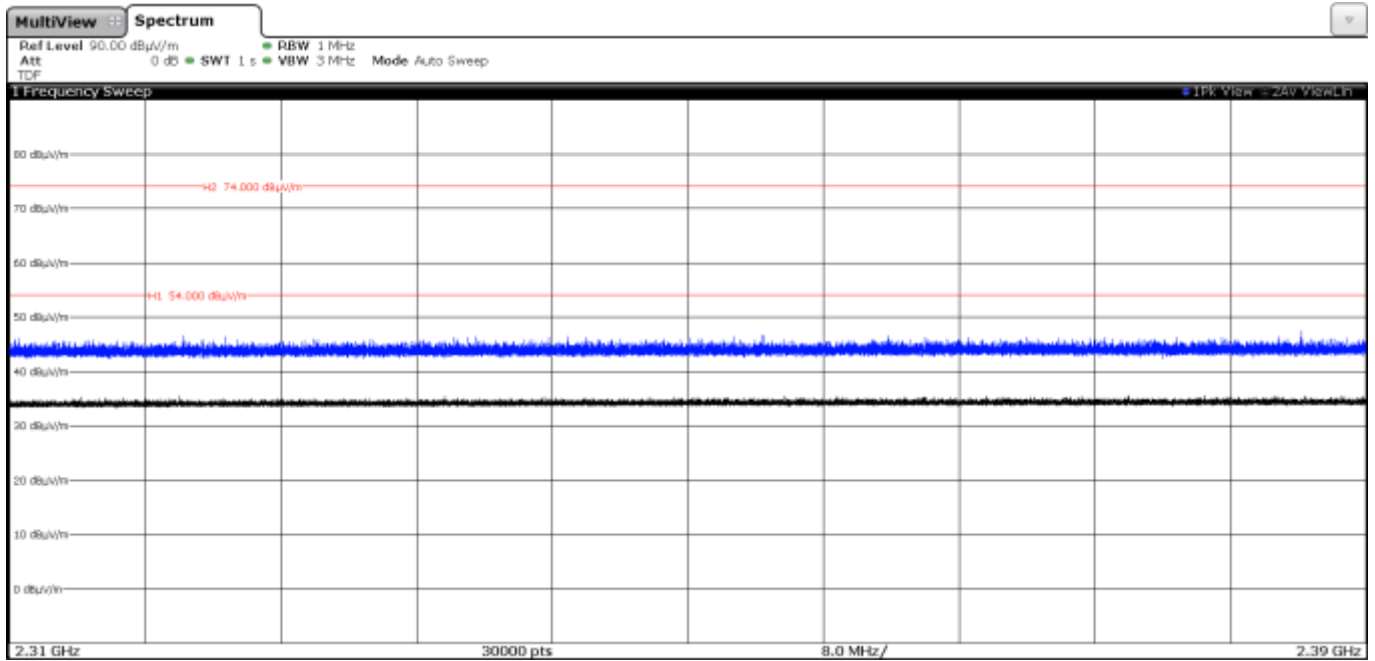


### FREQUENCY RANGE 2.4835-2.5 GHz (Restricted Band):

- Low Channel:

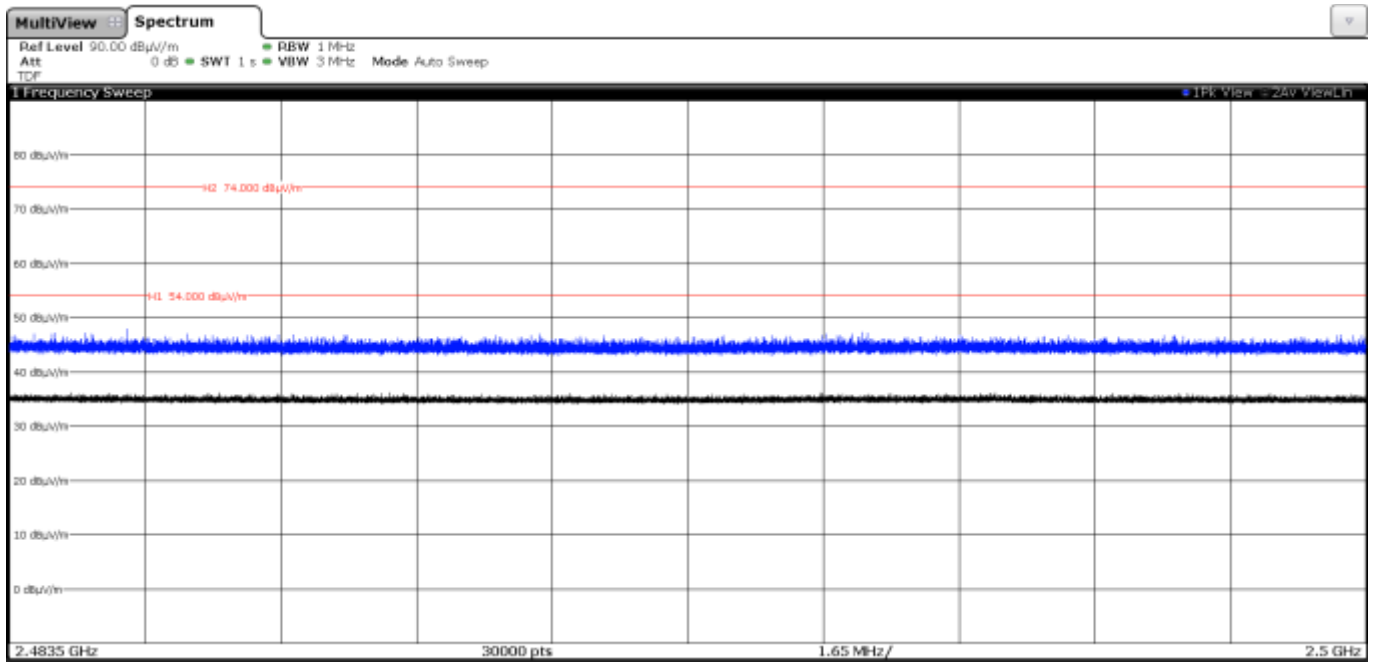

- Middle Channel:

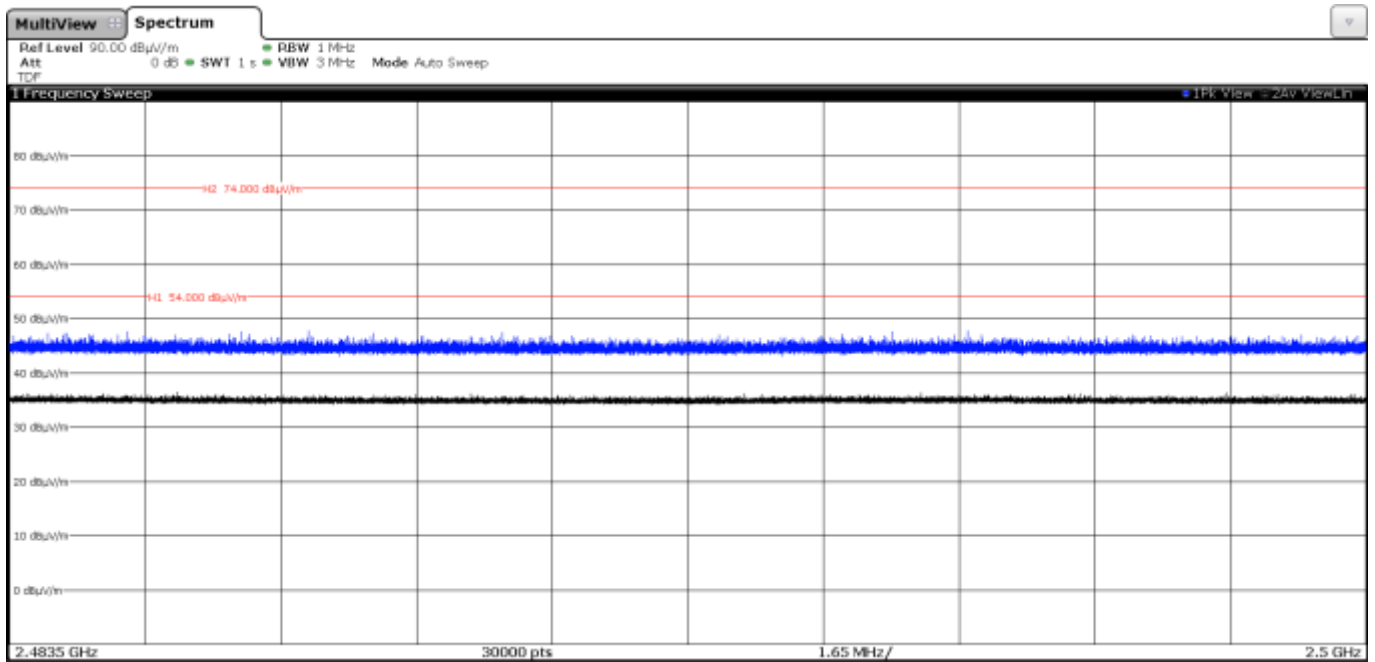

- High Channel:

