



# Variant FCC RF Test Report

**APPLICANT** : Texas Instruments Incorporated  
**EQUIPMENT** : WiFi and Bluetooth Module  
**BRAND NAME** : Texas Instruments  
**MODEL NAME** : WL18MODGB  
**FCC ID** : Z64-WL18SBMOD  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Oct. 23, 2014 and testing was completed on Aug. 14, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL INC.**

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



# TABLE OF CONTENTS

**REVISION HISTORY ..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test ..... 5

    1.4 Product Specification subjective to this standard ..... 6

    1.5 Modification of EUT ..... 6

    1.6 Testing Location ..... 7

    1.7 Applicable Standards ..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1 Carrier Frequency and Channel ..... 8

    2.2 Pre-Scanned RF Power ..... 9

    2.3 Test Mode ..... 10

    2.4 Connection Diagram of Test System ..... 11

    2.5 Support Unit used in test configuration and system ..... 11

    2.6 EUT Operation Test Setup ..... 11

    2.7 Measurement Results Explanation Example ..... 12

**3 TEST RESULT ..... 13**

    3.1 Peak Output Power Measurement ..... 13

    3.2 Radiated Band Edges and Spurious Emission Measurement ..... 15

    3.3 Antenna Requirements ..... 19

**4 LIST OF MEASURING EQUIPMENT ..... 20**

**5 UNCERTAINTY OF EVALUATION ..... 21**

**APPENDIX A. TEST RESULT OF CONDUCTED POWER**

**APPENDIX B. TEST RESULT OF CONDUCTED SPURIOUS EMISSION**

**APPENDIX C. TEST RESULT OF RADIATED SPURIOUS EMISSION**

**APPENDIX D. SETUP PHOTOGRAPHS**



## REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION  | ISSUED DATE   |
|------------|---------|--|---------------|
| FR4O2349C  | Rev. 01 | This is a variant report by adding 6 new antennas.<br>All the test cases were performed on original report which can be referred to Sporton Report Number FR3N2752-01CTX. Based on the original report, only the peak output power and conducted spurious emission and cabinet radiation were performed. | Sep. 04, 2015 |
|            |         |  |               |
|            |         |  |               |
|            |         |  |               |
|            |         |  |               |
|            |         |  |               |
|            |         |  |               |
|            |         |  |               |
|            |         |  |               |
|            |         |  |               |
|            |         |  |               |
|            |         |  |               |
|            |         |  |               |
|            |         |  |               |
|            |         |  |               |
|            |         |  |               |
|            |         |  |               |
|            |         |  |               |



### SUMMARY OF TEST RESULT

| Report Section | FCC Rule           | Description  | Limit                 | Result | Remark                            |
|----------------|--------------------|--|-----------------------|--------|-----------------------------------|
| 3.1            | 15.247(b)          | Power Output Measurement                           | $\leq 30\text{dBm}$   | Pass   | -                                 |
| 3.2            | 15.247(d)          | Radiated Band Edges and Radiated Spurious Emission | 15.209(a) & 15.247(d) | Pass   | Under limit 4.02 dB at 51.330 MHz |
| 3.3            | 15.203 & 15.247(b) | Antenna Requirement                                | N/A                   | Pass   | -                                 |



# 1 General Description

## 1.1 Applicant

**Texas Instruments Incorporated**  
12500 TI Boulevard, M/S 8751, Dallas, TX 75243, USA

## 1.2 Manufacturer

**Jorjin Technologies Inc**  
17F, No.239, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

## 1.3 Product Feature of Equipment Under Test

| Product Feature                        |   |
|--|---|
| <b>Equipment</b>                       | WiFi and Bluetooth Module                       |
| <b>Brand Name</b>                      | Texas Instruments                               |
| <b>Model Name</b>                      | WL18MODGB                                       |
| <b>FCC ID</b>                          | Z64-WL18SBMOD                                   |
| <b>EUT supports Radios application</b> | WLAN 11b/g/n HT20/HT40<br>Bluetooth v4.0 EDR/LE |
| <b>EUT Stage</b>                       | Identical Prototype                             |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification subjective to this standard

| Product Specification subjective to this standard |  |                     |  |                     |                     |          |   |   |          |   |   |               |   |   |               |   |   |
|---|--|---------------------|--|---------------------|---------------------|----------|---|---|----------|---|---|---------------|---|---|---------------|---|---|
| <b>Tx/Rx Channel Frequency Range</b>              | 802.11b/g/n : 2412 MHz ~ 2462 MHz  |                     |  |                     |                     |          |   |   |          |   |   |               |   |   |               |   |   |
| <b>Maximum Output Power to antenna</b>            | <b>&lt;Ant. 1&gt;</b><br>802.11b : 17.93 dBm (0.0607 W)<br>802.11g : 20.58 dBm (0.1143 W)<br>802.11n HT40 : 20.18 dBm (0.1042 W)<br><b>SISO&lt;Ant. 1&gt;</b><br>802.11n HT20 : 20.55 dBm (0.1135 W)<br><b>MIMO&lt;Ant. 1 + 2&gt;</b><br>802.11n HT20 : 23.52 dBm (0.2249 W)   |                     |  |                     |                     |          |   |   |          |   |   |               |   |   |               |   |   |
| <b>Type of Modulation</b>                         | 802.11b : DSSS (DBPSK / DQPSK / CCK)<br>802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)   |                     |  |                     |                     |          |   |   |          |   |   |               |   |   |               |   |   |
| <b>Antenna Function for Transmitter</b>           | <table border="1"> <thead> <tr> <th></th> <th>Chain Port 0 Ant. 1</th> <th>Chain Port 1 Ant. 2</th> </tr> </thead> <tbody> <tr> <td>802.11 b</td> <td>V</td> <td>-</td> </tr> <tr> <td>802.11 g</td> <td>V</td> <td>-</td> </tr> <tr> <td>802.11 n SISO</td> <td>V</td> <td>-</td> </tr> <tr> <td>802.11 n MIMO</td> <td>V</td> <td>V</td> </tr> </tbody> </table> |                     |  | Chain Port 0 Ant. 1 | Chain Port 1 Ant. 2 | 802.11 b | V | - | 802.11 g | V | - | 802.11 n SISO | V | - | 802.11 n MIMO | V | V |
|   | Chain Port 0 Ant. 1  | Chain Port 1 Ant. 2 |  |                     |                     |          |   |   |          |   |   |               |   |   |               |   |   |
| 802.11 b  | V  | -                   |  |                     |                     |          |   |   |          |   |   |               |   |   |               |   |   |
| 802.11 g  | V  | -                   |  |                     |                     |          |   |   |          |   |   |               |   |   |               |   |   |
| 802.11 n SISO                                     | V  | -                   |  |                     |                     |          |   |   |          |   |   |               |   |   |               |   |   |
| 802.11 n MIMO                                     | V  | V                   |  |                     |                     |          |   |   |          |   |   |               |   |   |               |   |   |

| Antenna Information |              |               |
|---------------------|--------------|---------------|
| Antenna Type        | Brand        | 2.4GHz~2.5GHz |
| PCB                 | Ethertronics | -0.6          |
| Dipole              | LSR          | 2             |
| PCB                 | Laird        | 2             |
| Chip                | Pulse        | 3.2           |
| PIFA                | LSR          | 2             |
| Chip                | TDK          | 2.4           |

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

|                           |  |
|---------------------------|--|
| <b>Test Site</b>          | SPORTON INTERNATIONAL INC.   |
| <b>Test Site Location</b> | No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park,<br>Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.<br>TEL: +886-3-327-3456<br>FAX: +886-3-328-4978 |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b><br>TH05-HY   |

|                           |   |
|---------------------------|---|
| <b>Test Site</b>          | SPORTON INTERNATIONAL INC.  |
| <b>Test Site Location</b> | No. 58 , Aly. 75, Ln. 564, Wenhua 3rd Rd.,<br>Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.<br>TEL: +886-3-327-0855 |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b><br>03CH10   |

**Note:** The test site complies with ANSI C63.4 2009 requirement.

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2009

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table for frequency above 1GHz as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency and Channel

| Frequency Band  | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|-----------------|---------|-------------|---------|-------------|
| 2400-2483.5 MHz | 1       | 2412        | 7       | 2442        |
|                 | 2       | 2417        | 8       | 2447        |
|                 | 3       | 2422        | 9       | 2452        |
|                 | 4       | 2427        | 10      | 2457        |
|                 | 5       | 2432        | 11      | 2462        |
|                 | 6       | 2437        |         |             |





## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

<Ant. 1>

| 802.11b          |        |       |       |
|------------------|--------|-------|-------|
| Data Rate (MHz)  | 1M bps |       |       |
| Channel          | CH 01  | CH 06 | CH 11 |
| Peak Power (dBm) | 17.93  | 17.73 | 17.51 |

| 802.11g          |       |       |       |
|------------------|-------|-------|-------|
| Data Rate (MHz)  | 6Mbps |       |       |
| Channel          | CH 01 | CH 06 | CH 11 |
| Peak Power (dBm) | 20.17 | 20.58 | 19.82 |

| 2.4GHz 802.11n HT40 |       |       |       |
|---------------------|-------|-------|-------|
| Data Rate (MHz)     | MCS0  |       |       |
| Channel             | CH 03 | CH 06 | CH 09 |
| Peak Power (dBm)    | 19.21 | 20.18 | 18.91 |

SISO<Ant. 1>

| 2.4GHz 802.11n HT20 |       |       |       |
|---------------------|-------|-------|-------|
| Data Rate (MHz)     | MCS0  |       |       |
| Channel             | CH 01 | CH 06 | CH 11 |
| Peak Power (dBm)    | 20.15 | 20.55 | 19.66 |

MIMO<Ant. 1 + 2>

| 2.4GHz 802.11n HT20 |       |       |       |
|---------------------|-------|-------|-------|
| Data Rate (MHz)     | MCS12 |       |       |
| Channel             | CH 01 | CH 06 | CH 11 |
| Peak Power (dBm)    | 23.33 | 23.52 | 23.14 |

Note: MIMO Ant. 1+2 is a calculated result from sum of the power MIMO Ant. 1 and MIMO Ant. 2.



## 2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

### Single Antenna

<2.4GHz>

| Modulation   | Data Rate |
|--------------|-----------|
| 802.11b      | 1 Mbps    |
| 802.11g      | 6 Mbps    |
| 802.11n HT20 | MCS0      |
| 802.11n HT40 | MCS0      |


### MIMO Antenna

<2.4GHz>

| Modulation   | Data Rate |
|--------------|-----------|
| 802.11n HT20 | MCS12     |

## 2.4 Connection Diagram of Test System

<WLAN Tx Mode>

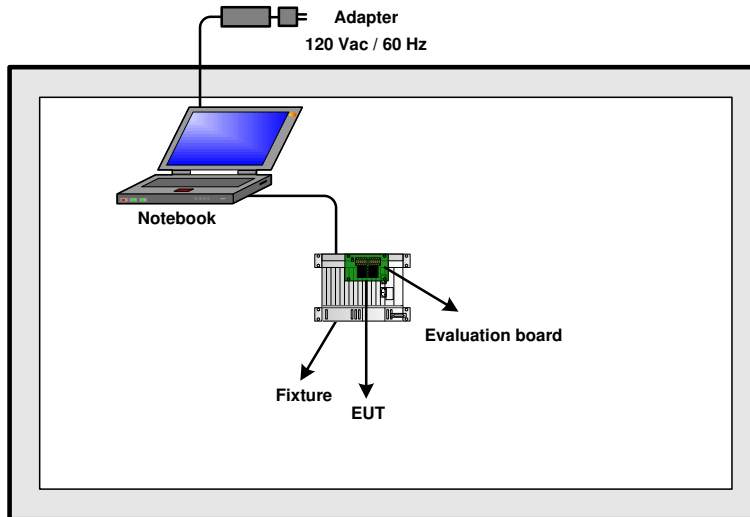

## 2.5 Support Unit used in test configuration and system

| Item | Equipment | Trade Name | Model Name                       | FCC ID                                      | Data Cable | Power Cord   |
|------|-----------|------------|----------------------------------|---|------------|--|
| 1.   | Notebook  | Lenovo     | E335 (with WiFi module TP00034A) | FCC DoC/<br>Contains FCC<br>ID:QDS-BRCM1058 | N/A        | AC I/P:<br>Unshielded, 1.2 m<br>DC O/P:<br>Shielded, 1.8 m |

## 2.6 EUT Operation Test Setup

For WLAN function, programmed RF utility, "Rttt" installed in the EUT make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.



## **2.7 Measurement Results Explanation Example**

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 Peak Output Power Measurement

##### 3.1.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r03 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

##### 3.1.4 Test Setup

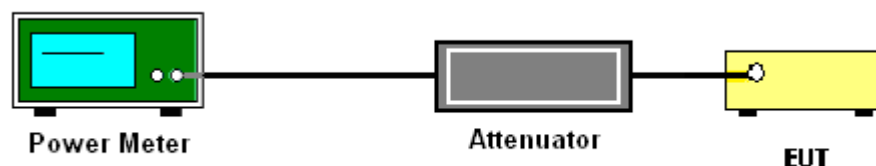



**3.1.5 Test Result of Peak Output Power**

Please refer to Appendix A.

**3.1.6 Test Result of Average output Power (Reporting Only)**

Please refer to Appendix A.



### 3.2 Radiated Band Edges and Spurious Emission Measurement

#### 3.2.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009 – 0.490   | 2400/F(kHz)                       | 300                           |
| 0.490 – 1.705   | 24000/F(kHz)                      | 30                            |
| 1.705 – 30.0    | 30                                | 30                            |
| 30 – 88         | 100                               | 3                             |
| 88 – 216        | 150                               | 3                             |
| 216 - 960       | 200                               | 3                             |
| Above 960       | 500                               | 3                             |

#### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.2.3 Test Procedure


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1 \text{ GHz}$ ;  $\text{VBW} \geq \text{RBW}$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1 \text{ GHz}$  for peak measurement.  
 For average measurement:
    - $\text{VBW} = 10 \text{ Hz}$ , when duty cycle is no less than 98 percent.
    - $\text{VBW} \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

| Antenna | Band                          | Duty Cycle(%) | T(us) | 1/T(kHz) | VBW Setting |
|---------|-------------------------------|---------------|-------|----------|-------------|
| 1       | 802.11b                       | 40.76         | 640   | 1.5625   | 3kHz        |
| 1       | 802.11g                       | 32.69         | 340   | 2.94     | 3kHz        |
| 1       | 2.4GHz 802.11n HT20           | 33.02         | 350   | 2.86     | 3kHz        |
| 1       | 2.4GHz 802.11n HT40           | 30.39         | 310   | 3.23     | 10kHz       |
| 1+2     | 2.4GHz 802.11n HT20 for Ant 1 | 30.88         | 210   | 4.76     | 10kHz       |
| 1+2     | 2.4GHz 802.11n HT20 for Ant 2 | 30.88         | 210   | 4.76     | 10kHz       |




### 3.2.4 Test Setup


For Conducted Measurement Setup:

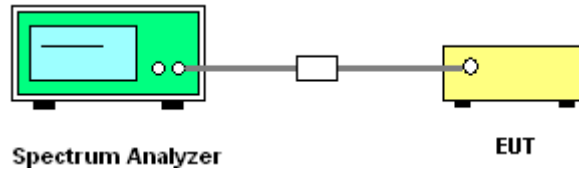


For radiated emissions below 30MHz

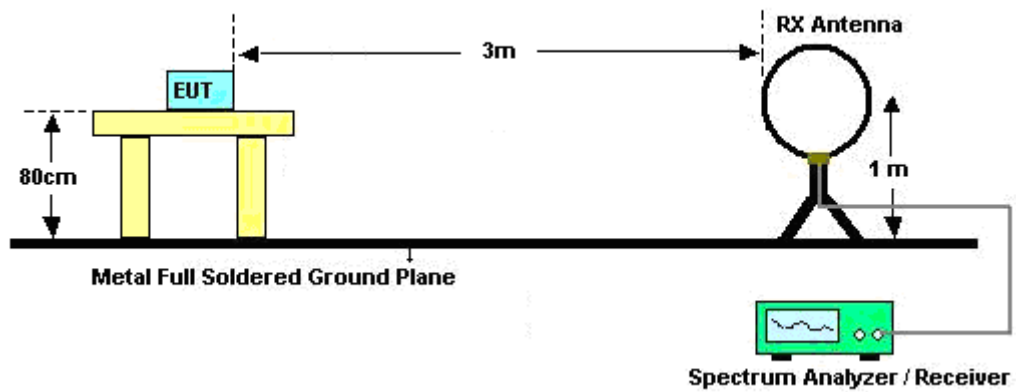

For radiated emissions from 30MHz to 1GHz

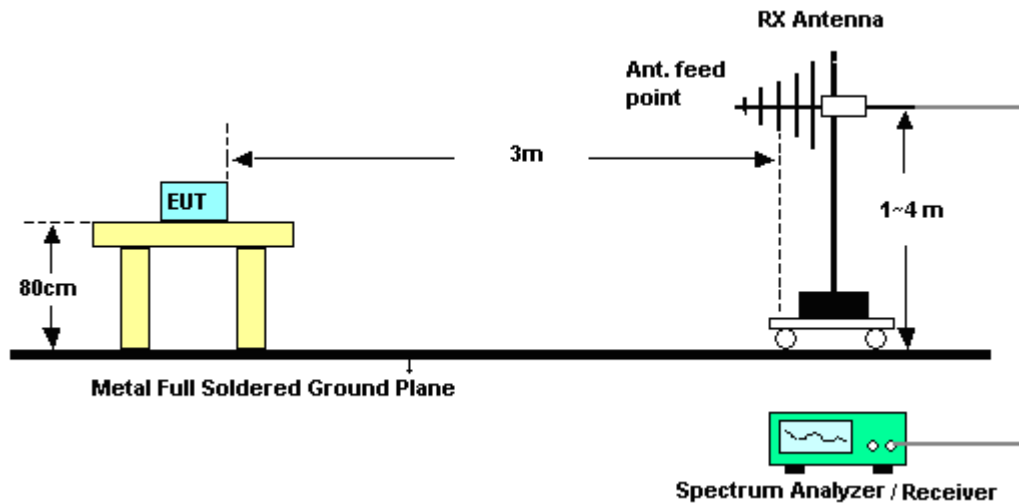

For radiated emissions above 1GHz

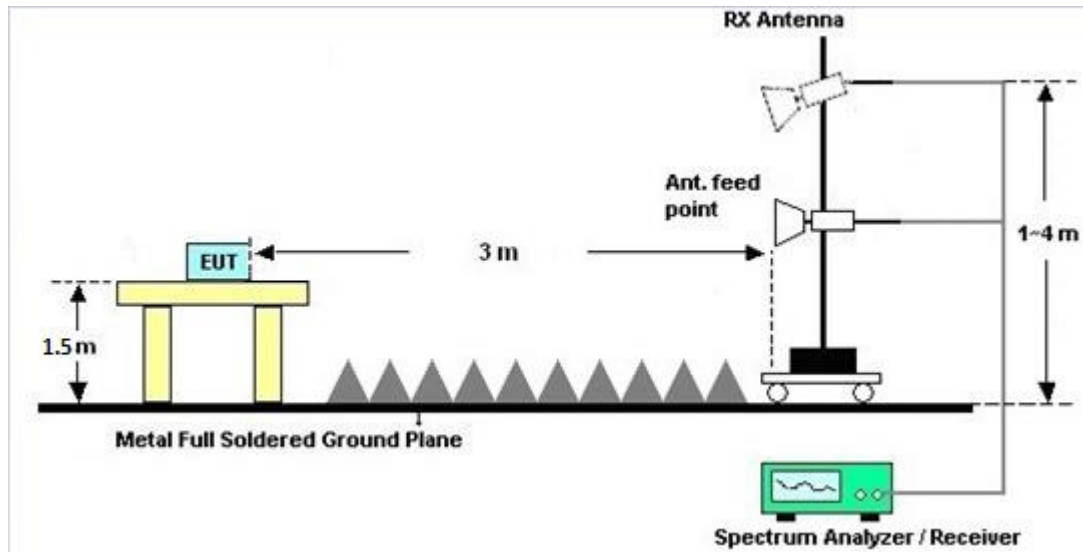

### 3.2.5 Test Results of Radiated Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.2.6 Test Result of Conducted Spurious at Band Edges in the Restricted Band

Please refer to Appendix B.

### 3.2.7 Test Result of Conducted Spurious Emission in the Restricted Band

Please refer to Appendix B.

### 3.2.8 Test Result of Cabinet Radiated Spurious at Band Edges

Please refer to Appendix C.

### 3.2.9 Test Result of Cabinet Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix C.



### 3.3 Antenna Requirements

#### 3.3.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the Antenna exceeds 6 dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

#### 3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.3.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

For CDD transmissions, directional gain is calculated as

Directional gain =  $G_{ANT} + \text{Array Gain}$ , where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain =  $10 \log(N_{ANT}/N_{SS}=1)$  dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ .

The EUT supports only MCS 12-15 for MIMO mode, hence  $N_{ss}=2$ .

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

|         |        |        | DG    | DG    | Power     | PSD       |
|---------|--------|--------|-------|-------|-----------|-----------|
|         | Ant. 1 | Ant. 2 | for   | for   | Limit     | Limit     |
|         | (dBi)  | (dBi)  | Power | PSD   | Reduction | Reduction |
|         |        |        | (dBi) | (dBi) | (dB)      | (dB)      |
| 2.4 GHz | 3.20   | 3.20   | 3.20  | 3.20  | 0.00      | 0.00      |

Power Limit Reduction =  $DG(\text{Power}) - 6\text{dBi}$ , ( min = 0 )

PSD Limit Reduction =  $DG(\text{PSD}) - 6\text{dBi}$ , ( min = 0 )



## 4 List of Measuring Equipment

| Instrument        | Manufacturer    | Model No.               | Serial No.      | Characteristics                  | Calibration Date | Test Date                       | Due Date      | Remark                   |
|-------------------|-----------------|-------------------------|-----------------|----------------------------------|------------------|---------------------------------|---------------|--------------------------|
| Power Meter       | Anritsu         | ML2495A                 | 1218006         | 300MHz~40GHz                     | Oct. 18, 2014    | Aug. 07, 2015~<br>Aug. 13, 2015 | Oct. 17, 2015 | Conducted<br>(TH05-HY)   |
| Power Sensor      | Anritsu         | MA2411B                 | 1126017         | 300MHz~40GHz                     | Oct. 18, 2014    | Aug. 07, 2015~<br>Aug. 13, 2015 | Oct. 17, 2015 | Conducted<br>(TH05-HY)   |
| Spectrum Analyzer | Rohde & Schwarz | FSP40                   | 100055          | 9kHz-40GHz                       | Jun. 18, 2015    | Aug. 07, 2015~<br>Aug. 13, 2015 | Jun. 17, 2016 | Conducted<br>(TH05-HY)   |
| Horn Antenna      | SCHWARZBECK     | BBHA 9170               | BBHA9170<br>584 | 18GHz- 40GHz                     | Nov. 03, 2014    | Aug. 13, 2015~<br>Aug. 14, 2015 | Nov. 02, 2015 | Radiation<br>(03CH10-HY) |
| Loop Antenna      | TESEQ           | HLA 6120                | 31244           | 9kHz~30MHz                       | Feb. 02, 2015    | Aug. 13, 2015~<br>Aug. 14, 2015 | Feb. 01, 2016 | Radiation<br>(03CH10-HY) |
| Amplifier         | SONOMA          | 310N                    | 187311          | 9kHz~1GHz                        | Nov. 24, 2014    | Aug. 13, 2015~<br>Aug. 14, 2015 | Nov. 23, 2015 | Radiation<br>(03CH10-HY) |
| Bilog Antenna     | TESEQ           | CBL 6111D               | 35413           | 30MHz~1GHz                       | Oct. 24, 2014    | Aug. 13, 2015~<br>Aug. 14, 2015 | Oct. 23, 2015 | Radiation<br>(03CH10-HY) |
| EMI Test Receiver | Keysight        | N9038A                  | MY541300<br>85  | 20Hz ~ 8.4GHz                    | Nov. 05, 2014    | Aug. 13, 2015~<br>Aug. 14, 2015 | Nov. 04, 2015 | Radiation<br>(03CH10-HY) |
| Horn Antenna      | SCHWARZBECK     | BBHA 9120 D             | 9120D-132<br>5  | 1GHz ~ 18GHz                     | Oct. 03, 2014    | Aug. 13, 2015~<br>Aug. 14, 2015 | Oct. 02, 2015 | Radiation<br>(03CH10-HY) |
| Preamplifier      | Keysight        | 83017A                  | MY532700<br>78  | 1GHz~26.5GHz                     | Nov. 20, 2014    | Aug. 13, 2015~<br>Aug. 14, 2015 | Nov. 19, 2015 | Radiation<br>(03CH10-HY) |
| Spectrum Analyzer | Keysight        | N9010A                  | MY542004<br>85  | 10Hz ~ 44GHZ                     | Oct. 14, 2014    | Aug. 13, 2015~<br>Aug. 14, 2015 | Oct. 13, 2015 | Radiation<br>(03CH10-HY) |
| Controller        | EMEC            | EM 1000                 | N/A             | Control Turn table<br>& Ant Mast | N/A              | Aug. 13, 2015~<br>Aug. 14, 2015 | N/A           | Radiation<br>(03CH10-HY) |
| Antenna Mast      | EMEC            | AM-BS-4500-<br>B        | N/A             | 1~4m                             | N/A              | Aug. 13, 2015~<br>Aug. 14, 2015 | N/A           | Radiation<br>(03CH10-HY) |
| Turn Table        | EMEC            | TT 2200                 | N/A             | 0-360 degree                     | N/A              | Aug. 13, 2015~<br>Aug. 14, 2015 | N/A           | Radiation<br>(03CH10-HY) |
| Preamplifier      | MITEQ           | JS44-180040<br>00-33-8P | 1840917         | 18GHz ~ 40GHz                    | Jun. 02, 2015    | Aug. 13, 2015~<br>Aug. 14, 2015 | Jun. 01, 2016 | Radiation<br>(03CH10-HY) |



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|   |      |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 4.90 |
|---|------|



## **APPENDIX A. TEST RESULT OF CONDUCTED POWER**