



FCC RF Test Report

APPLICANT : Ring LLC
EQUIPMENT : Video Doorbell Pro 2
BRAND NAME : Ring
MODEL NAME : 5AT2S2
FCC ID : 2AEUPBHALP031
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Sep. 08, 2020 and testing was completed on Jan. 08, 2021. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 5

 1.5 Modification of EUT 6

 1.6 Testing Location 6

 1.7 Test Software..... 6

 1.8 Applicable Standards..... 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7

 2.1 Carrier Frequency Channel 7

 2.2 Test Mode..... 8

 2.3 Connection Diagram of Test System..... 9

 2.4 Support Unit used in test configuration and system 10

 2.5 EUT Operation Test Setup 10

 2.6 Measurement Results Explanation Example..... 10

3 TEST RESULT 11

 3.1 Number of Channel Measurement 11

 3.2 Hopping Channel Separation Measurement 14

 3.3 Dwell Time Measurement..... 20

 3.4 20dB and 99% Bandwidth Measurement 24

 3.5 Output Power Measurement..... 35

 3.6 Conducted Band Edges Measurement..... 36

 3.7 Conducted Spurious Emission Measurement 43

 3.8 Radiated Band Edges and Spurious Emission Measurement 53

 3.9 AC Conducted Emission Measurement..... 57

 3.10 Antenna Requirements 59

4 LIST OF MEASURING EQUIPMENT..... 60

5 UNCERTAINTY OF EVALUATION..... 61

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR090815F	Rev. 01	Initial issue of report	Jan. 11, 2021
FR090815F	Rev. 02	Reduce the power of 250kbps	Feb. 19, 2021



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)(i)	Number of Channels	≥ 50Chs/25CHs	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	20dB Bandwidth	Pass	-
3.3	15.247(a)(1)(i)	Dwell Time of Each Channel	≤ 0.4sec in 20sec period	Pass	-
3.4	15.247(a)(1)(i)	20dB Bandwidth	≤ 500 kHz	Pass	-
3.4	-	99% Bandwidth	-	Pass	-
3.5	15.247(b)(2)	Peak Output Power	≤ 1 W	Pass	-
3.6	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 32.73 dB at 2710.00 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 22.39 dB at 16.839 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Ring LLC
1523 26th St, Santa Monica, CA 90404, USA

1.2 Manufacturer

Goertek Inc.
No.268 Dongfang Road High-Tech Industrial Development District, Weifang Shandong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Video Doorbell Pro 2
Brand Name	Ring
Model Name	5AT2S2
FCC ID	2AEUPBHALP031
EUT supports Radios application	WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE LoRa DTS/LoRa FHSS/FSK FHSS Radar
HW Version	R6
SW Version	7.1.61
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	902 MHz ~ 928 MHz
Number of Channels / Data Rate	129 chs for 50kbps 64 chs for 150kbps 49 chs for 250kbps
Maximum Output Power to Antenna	Data Rate 50kbps : 25.05 dBm (0.3199 W) Data Rate 150kbps : 24.93 dBm (0.3112 W) Data Rate 250kbps : 23.93 dBm (0.2472 W)
99% Occupied Bandwidth	Data Rate 50kbps : 0.103MHz Data Rate 150kbps : 0.155MHz Data Rate 250kbps : 0.253MHz
Antenna Type / Gain	IFA Antenna with gain -1.01 dBi
Type of Modulation	FSK



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH06-KS CO01-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Data Rate 50kbps :

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
902-928 MHz	1	902.2	44	910.8	87	919.4
	2	902.4	45	911	88	919.6
	3	902.6	46	911.2	89	919.8
	4	902.8	47	911.4	90	920
	5	903	48	911.6	91	920.2
	6	903.2	49	911.8	92	920.4
	7	903.4	50	912	93	920.6
	8	903.6	51	912.2	94	920.8
	9	903.8	52	912.4	95	921
	10	904	53	912.6	96	921.2
	11	904.2	54	912.8	97	921.4
	12	904.4	55	913	98	921.6
	13	904.6	56	913.2	99	921.8
	14	904.8	57	913.4	100	922
	15	905	58	913.6	101	922.2
	16	905.2	59	913.8	102	922.4
	17	905.4	60	914	103	922.6
	18	905.6	61	914.2	104	922.8
	19	905.8	62	914.4	105	923
	20	906	63	914.6	106	923.2
	21	906.2	64	914.8	107	923.4
	22	906.4	65	915	108	923.6
	23	906.6	66	915.2	109	923.8
	24	906.8	67	915.4	110	924
	25	907	68	915.6	111	924.2
	26	907.2	69	915.8	112	924.4
	27	907.4	70	916	113	924.6
	28	907.6	71	916.2	114	924.8
	29	907.8	72	916.4	115	925
	30	908	73	916.6	116	925.2
	31	908.2	74	916.8	117	925.4
	32	908.4	75	917	118	925.6
	33	908.6	76	917.2	119	925.8
	34	908.8	77	917.4	120	926
	35	909	78	917.6	121	926.2
	36	909.2	79	917.8	122	926.4
	37	909.4	80	918	123	926.6
	38	909.6	81	918.2	124	926.8
	39	909.8	82	918.4	125	927
	40	910	83	918.6	126	927.2
	41	910.2	84	918.8	127	927.4
	42	910.4	85	919	128	927.6
	43	910.6	86	919.2	129	927.8

Note: The above EUT's information was declared by manufacturer.



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Modulation / Data Rate		
	FSK FHSS / 50kbps	FSK FHSS / 150kbps	FSK FHSS / 250kbps
Conducted Test Cases	Low: 902.2 MHz Mid: 915 MHz High: 927.8 MHz	Low: 902.4 MHz Mid: 914.8 MHz High: 927.6 MHz	Low: 903 MHz Mid: 915 MHz High: 927 MHz
Radiated Test Cases	Low: 902.2 MHz Mid: 915 MHz High: 927.8 MHz	Low: 902.4 MHz Mid: 914.8 MHz High: 927.6 MHz	Low: 903 MHz Mid: 915 MHz High: 927 MHz
AC Conducted Emission	Mode 1 : Lora Tx + BT Link + WLAN Link(2.4G) + 2.4G Radar Tx + Adaptor		
Remark: Sample2 perform all test cases.			

2.3 Connection Diagram of Test System

For Conducted Emission:

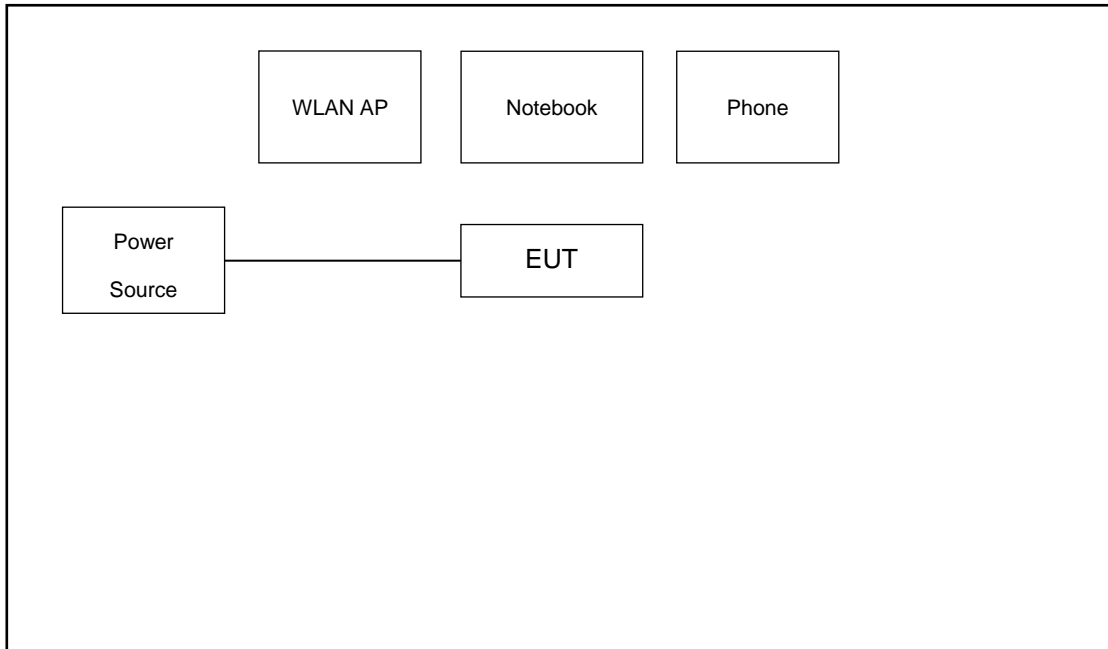

For Radiated Emission:

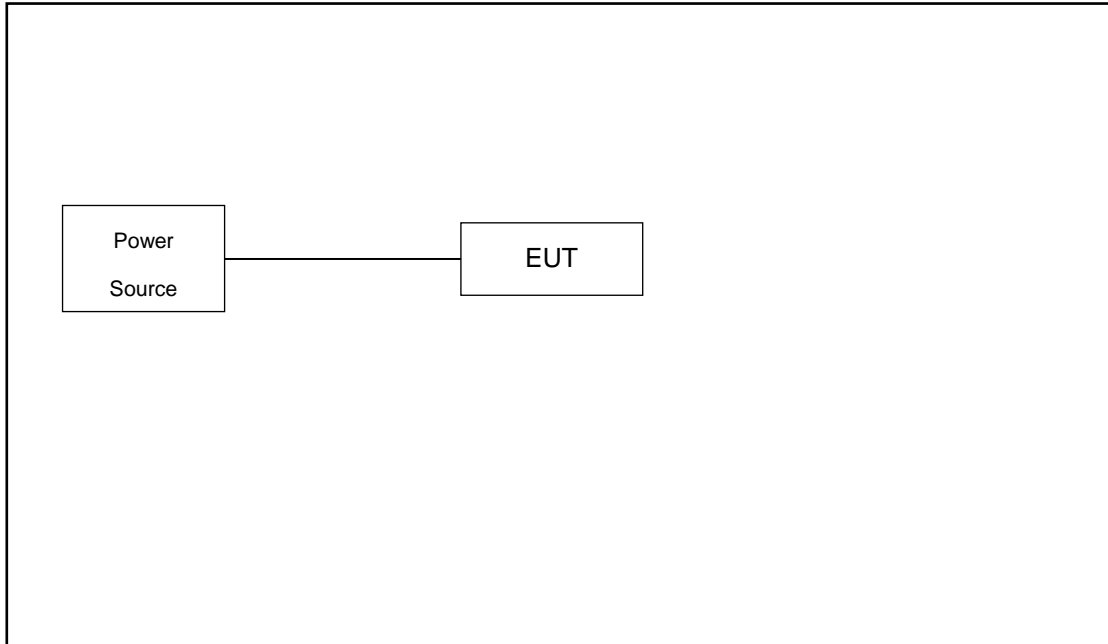

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	Phone	MOTO	XT1952-1	XXXX	N/A	N/A

2.5 EUT Operation Test Setup

For FSK FHSS function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.8 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.8 + 10 = 14.8 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
RBW = 50kHz, VBW = 200kHz (for 50kbps);
RBW = 100kHz, VBW = 300kHz (for 150kbps);
RBW = 100kHz, VBW = 300kHz (for 250kbps);
Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup






3.1.5 Test Result of Number of Hopping Frequency


Please refer to Appendix A.

Number of Hopping Channel Plot (Data Rate 50kbps)

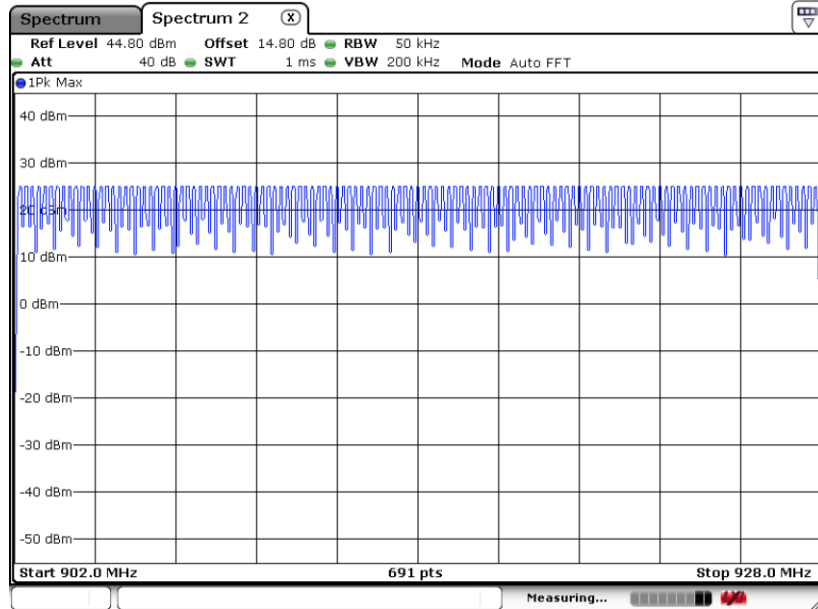

Date: 18 SEP. 2020 16:24:58

Number of Hopping Channel Plot (Data Rate 150kbps)

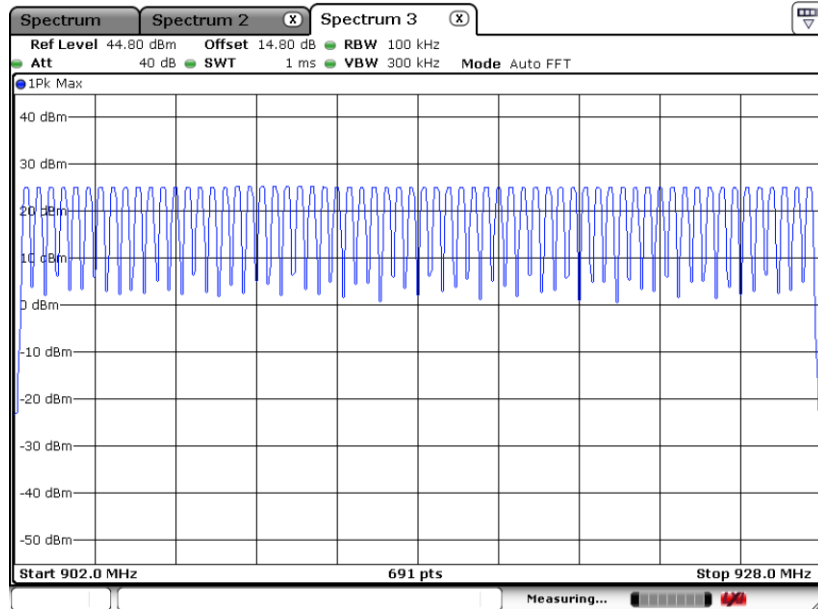


Date: 18 SEP. 2020 16:55:06



:

Number of Hopping Channel Plot (Data Rate 250kbps)

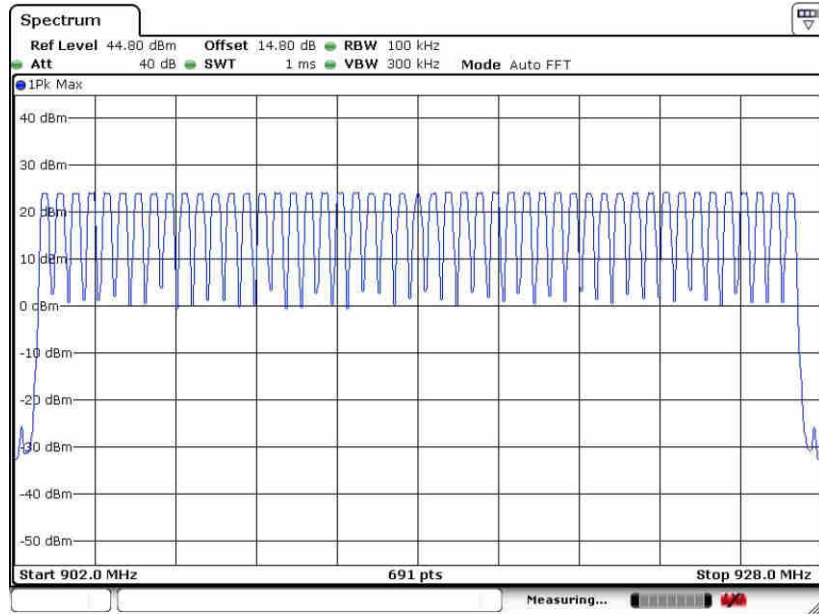

Date: 5 JAN.2021 14:08:31

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
 - Span = wide enough to capture the peaks of two adjacent channels;
 - RBW = 50kHz, VBW = 200kHz (for 50kbps);
 - RBW = 100kHz, VBW = 300kHz (for 150kbps);
 - RBW = 200kHz, VBW = 500kHz (for 250kbps);
 - Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

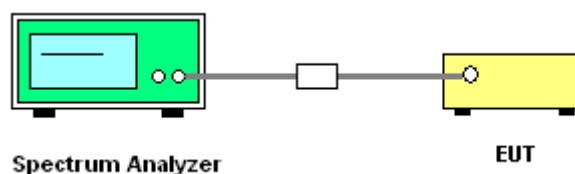

3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.




<Data Rate 50kbps>

Channel Separation Plot on Low CH




Channel Separation Plot on Mid CH

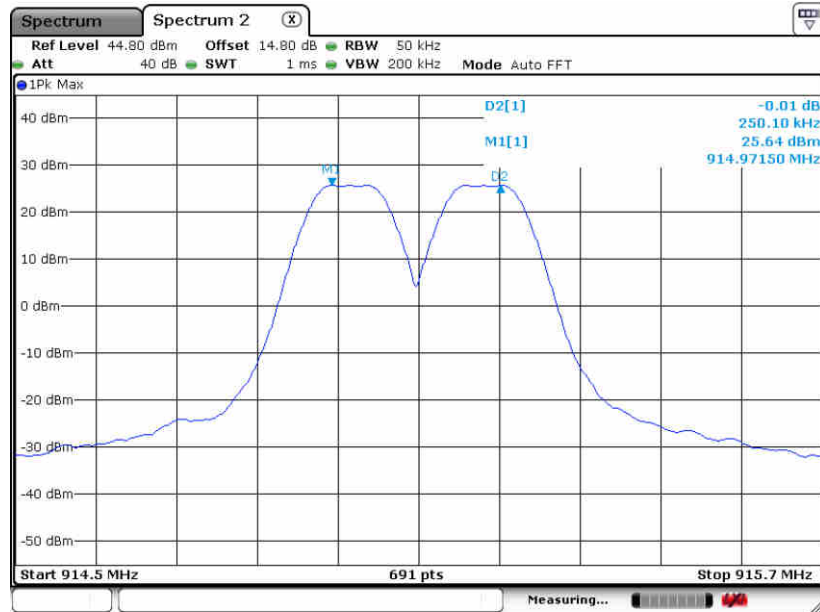




Channel Separation Plot on High CH

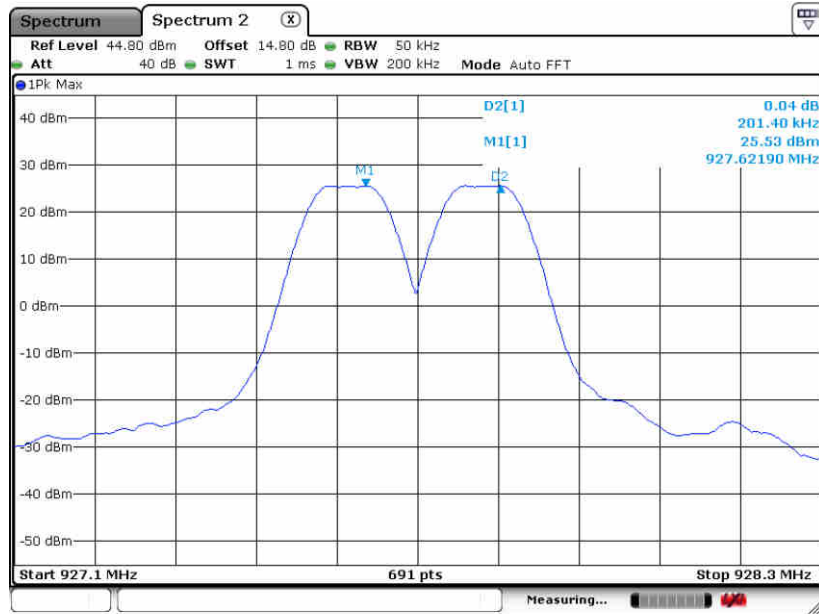

Date: 18 SEP.2020 15:20:17

<Data Rate 150kbps>


Channel Separation Plot on Low CH

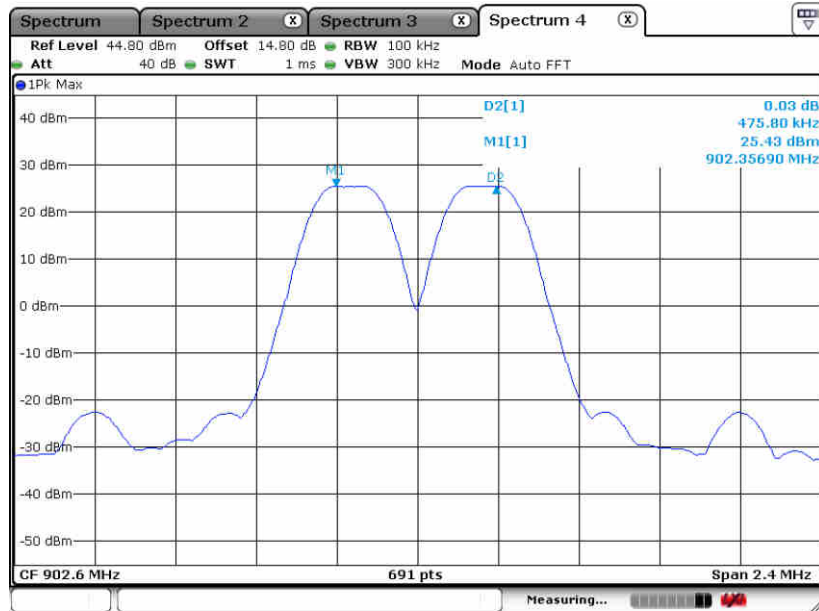

Date: 18 SEP.2020 17:58:19




Channel Separation Plot on Mid CH

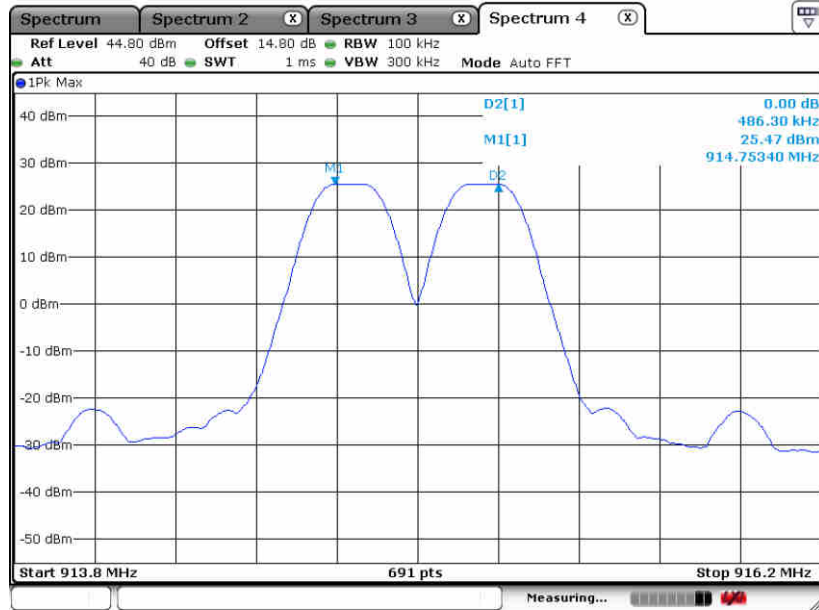

Date: 18 SEP.2020 18:00:30

Channel Separation Plot on High CH

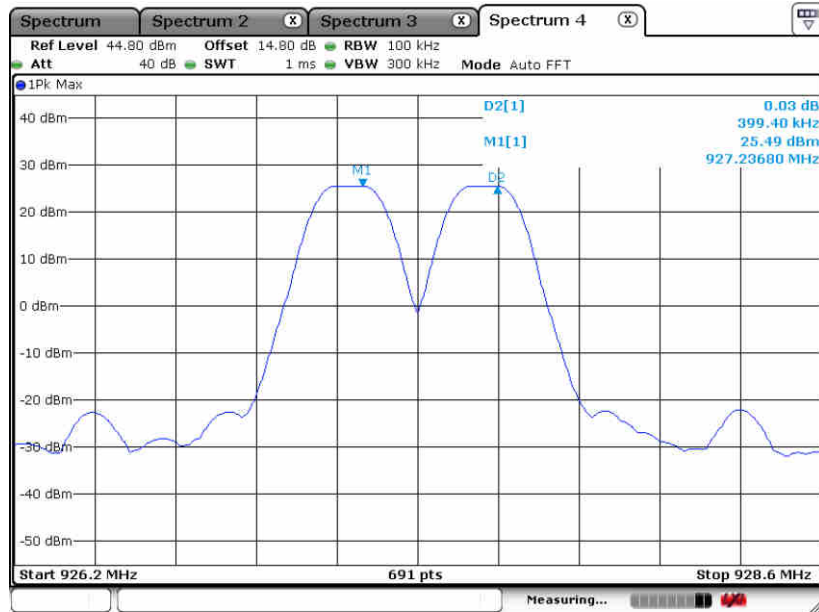


Date: 18 SEP.2020 18:02:50




<Data Rate 250kbps>

Channel Separation Plot on Low CH

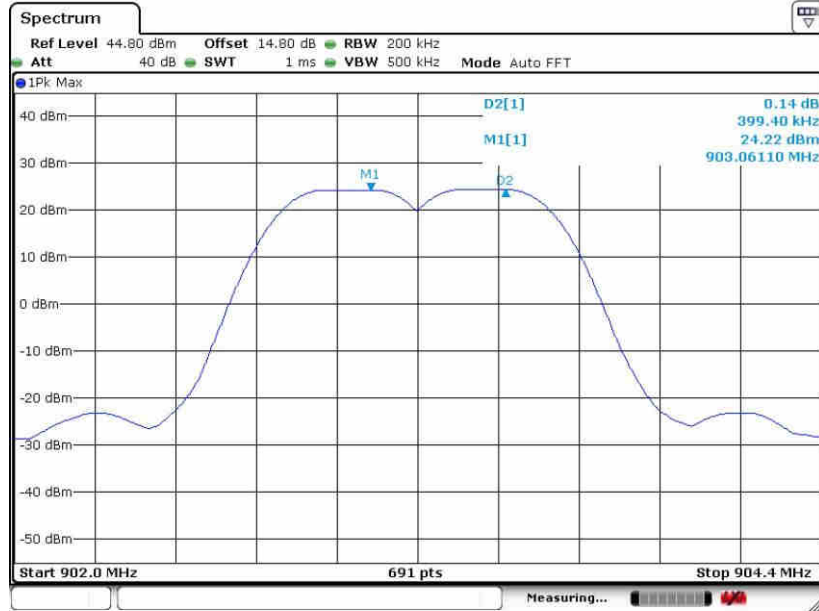


Channel Separation Plot on Mid CH

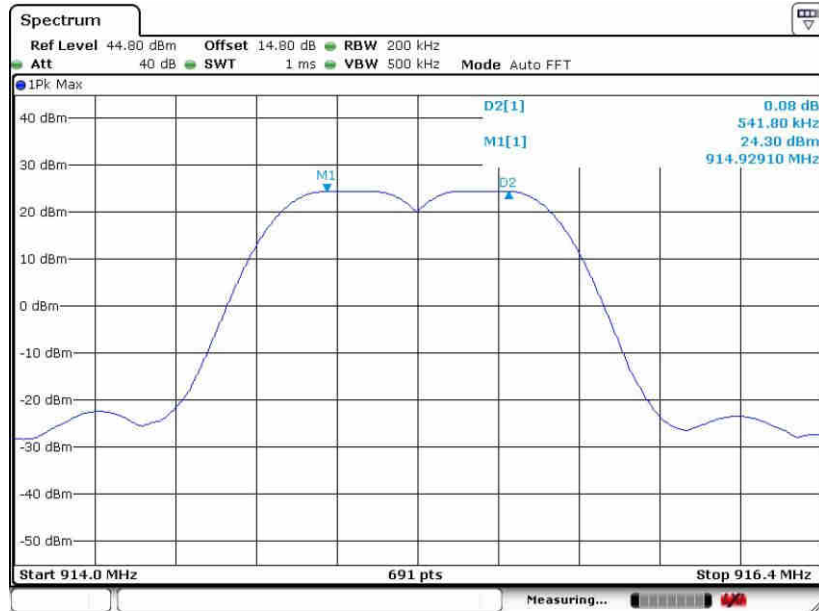



Channel Separation Plot on High CH

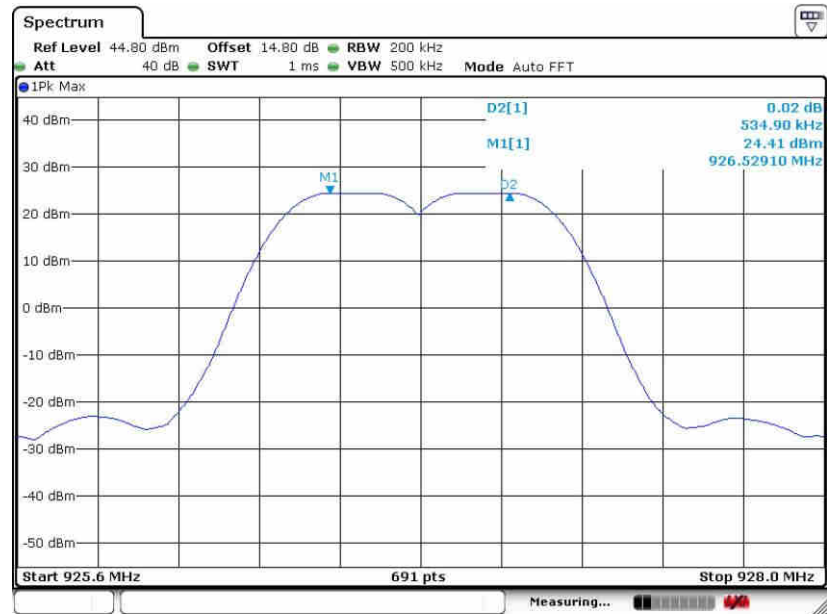

Date: 5 JAN 2021 14:05:48

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 20 KHz; VBW = 20 KHz; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

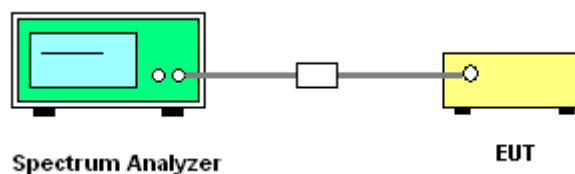




3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

DT on-time and Hops over 20 sec period for Data Rate 50kbps

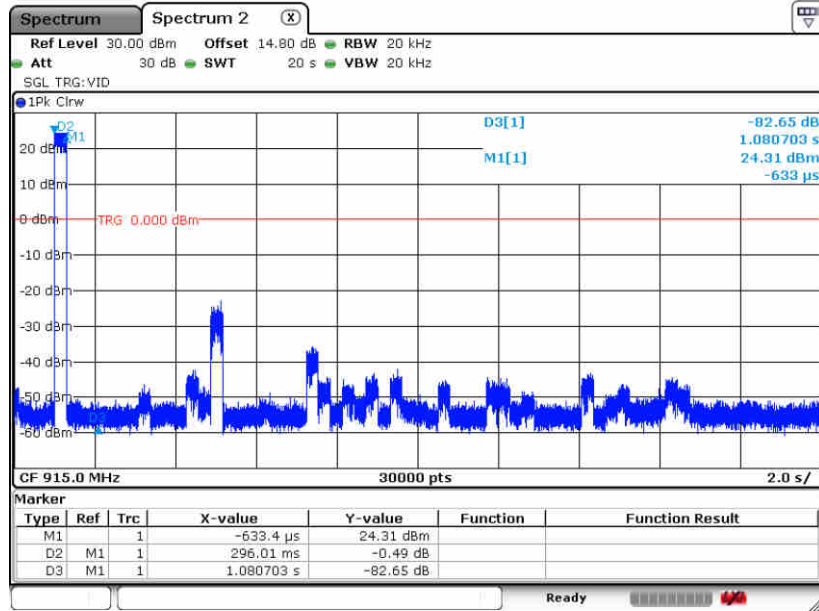


Date: 18 SEP. 2020 16:43:15

Remark:

$$\begin{aligned}
 \text{Dwell Time(s)} &= \text{Hops Over Occupancy Time (hops)} \times \text{Package Transfer Time} \\
 &= 1 \text{ (hop)} \times 296.01 \text{ (ms)} \\
 &= 0.296 \text{ (sec)}
 \end{aligned}$$



DT on-time and Hops over 20 sec period for Data Rate 150kbps

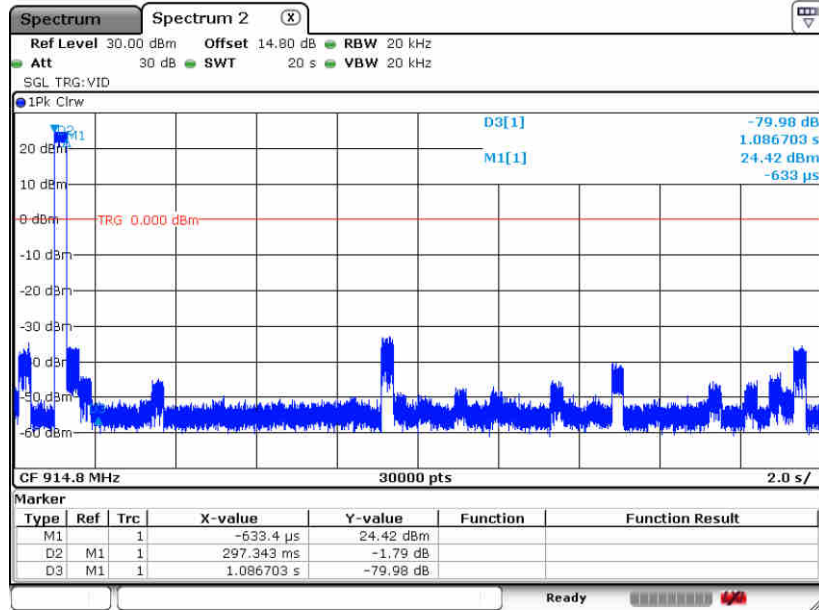


Date: 18 SEP 2020 16:39:08

Remark:

Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time
= 1 (hop) x 297.343 (ms)
= 0.297 (sec)



DT on-time and Hops over 20 sec period for Data Rate 250kbps

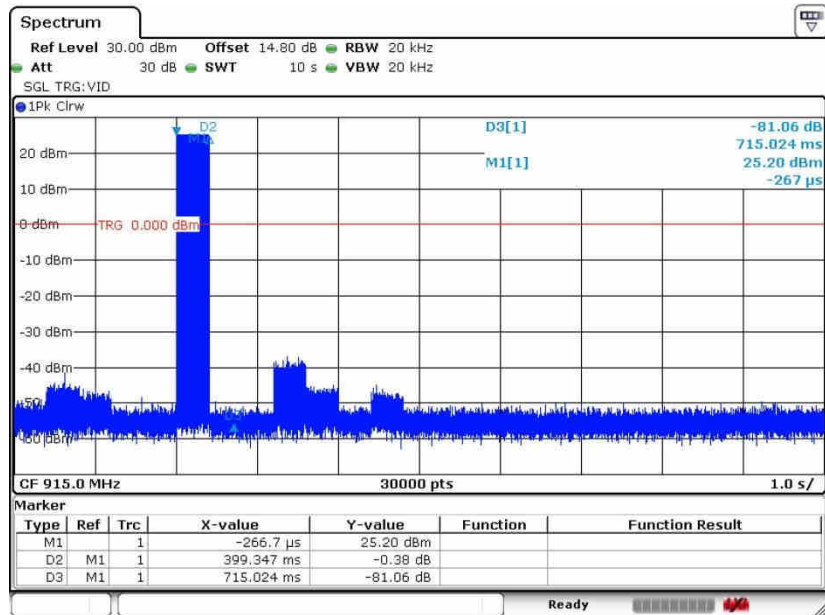

Date: 6.NOV.2020 07:52:24

Remark:

Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time
 = 1 (hop) x 399.347 (ms)
 = 0.399 (sec)

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW \geq 1% of the 99% bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup




3.4.5 Test Result of 20dB Bandwidth

Please refer to Appendix A.




<Data Rate 50kbps>

20 dB Bandwidth Plot on Low Channel

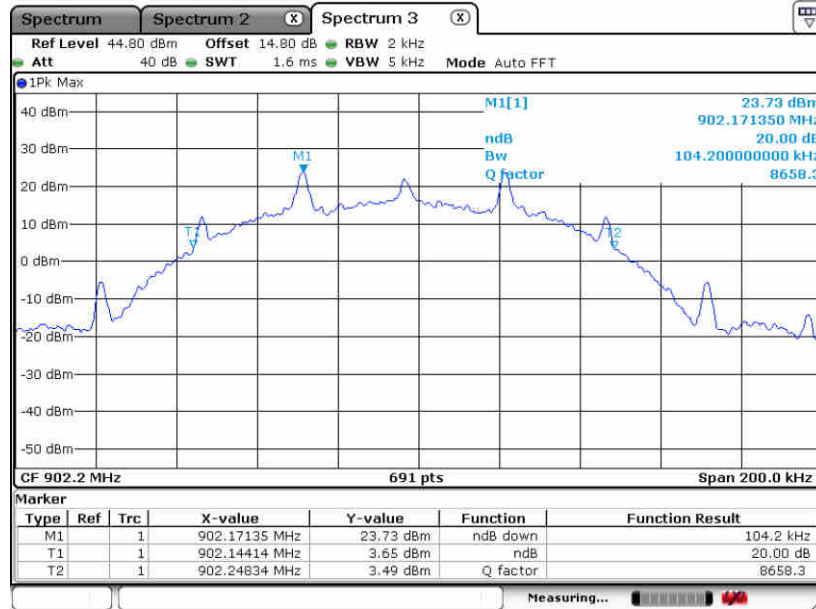

Date: 18 SEP.2020 15:11:04


20 dB Bandwidth Plot on Mid Channel

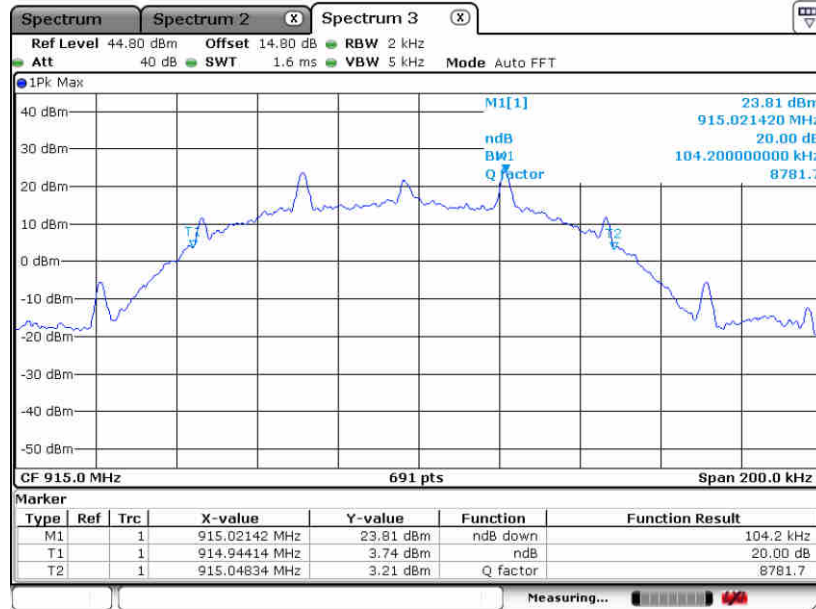

Date: 18 SEP.2020 15:09:59




20 dB Bandwidth Plot on High Channel

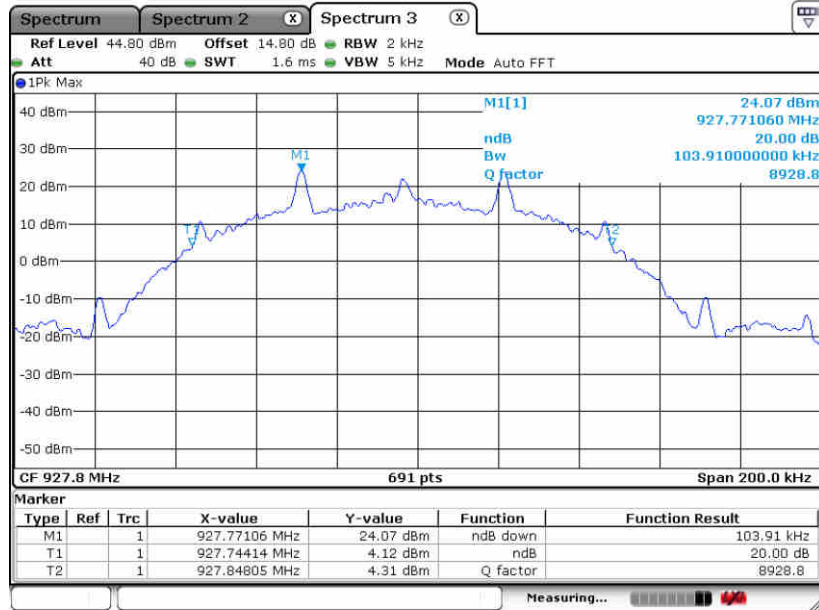

Date: 18 SEP.2020 15:12:04

<Data Rate 150kbps>


20 dB Bandwidth Plot on Low Channel

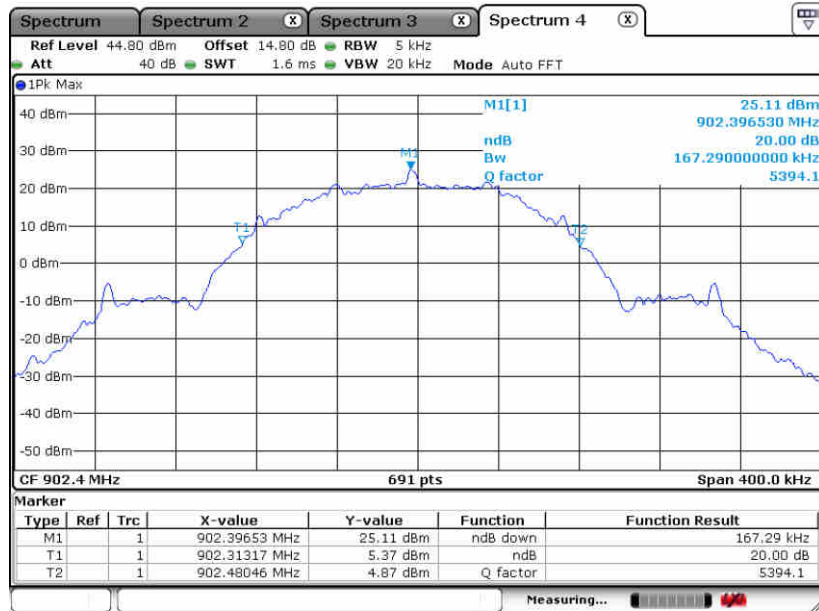

Date: 18 SEP.2020 17:11:24




20 dB Bandwidth Plot on Mid Channel

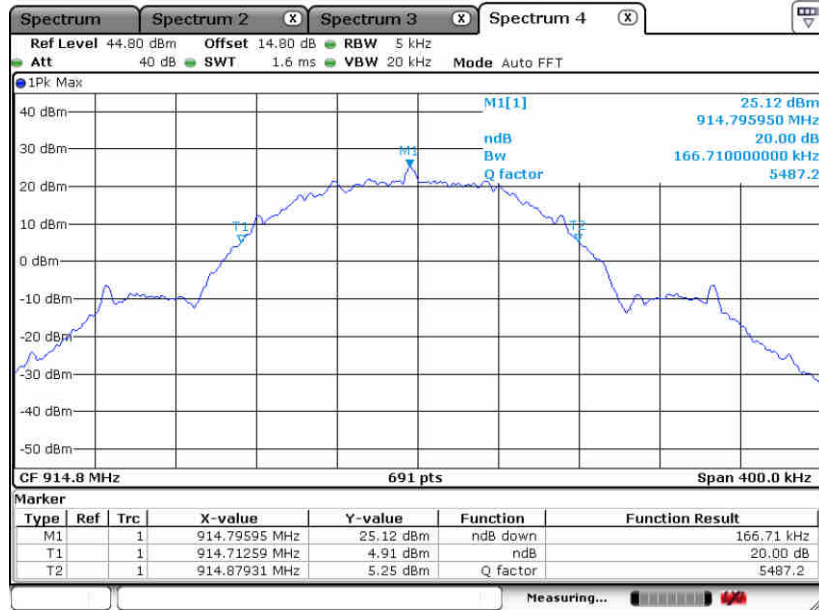

Date: 18 SEP.2020 17:13:19

20 dB Bandwidth Plot on High Channel

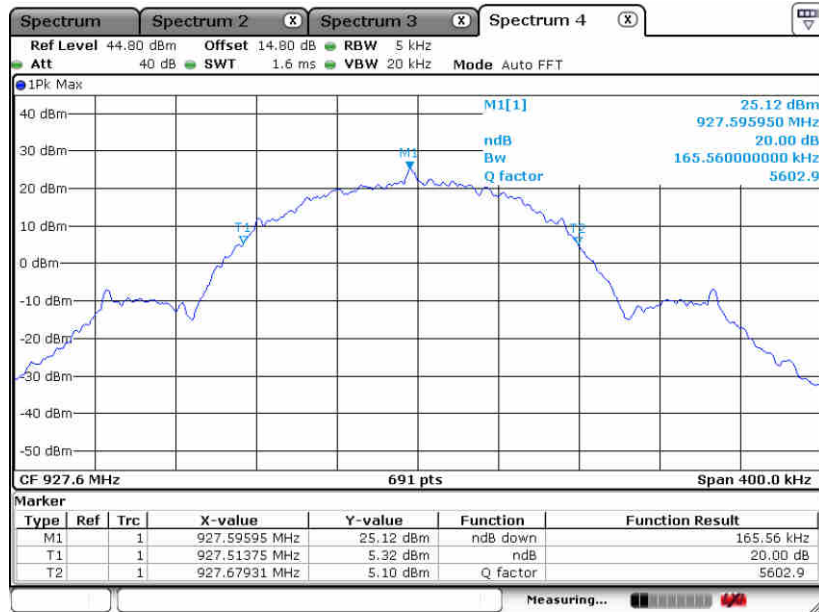


Date: 18 SEP.2020 17:14:20




<Data Rate 250kbps>

20 dB Bandwidth Plot on Low Channel

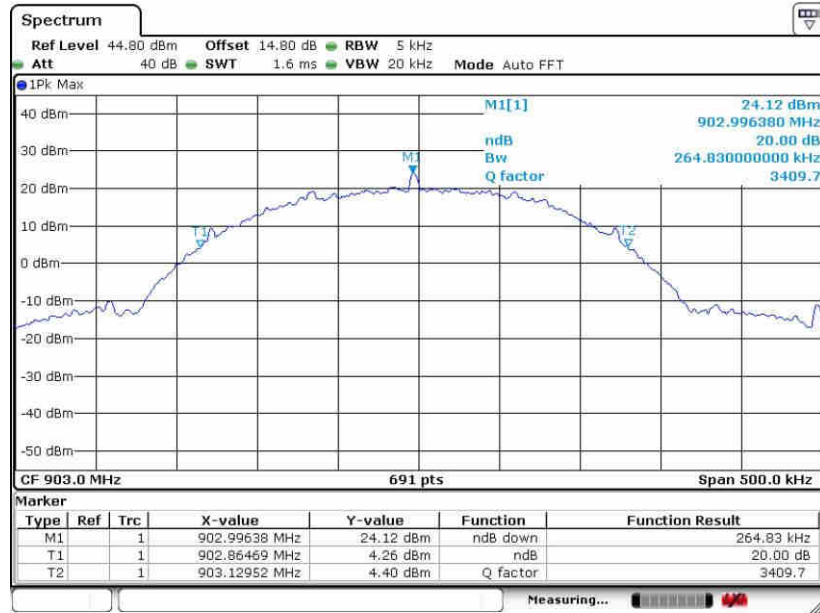

Date: 5 JAN 2021 13:42:20


20 dB Bandwidth Plot on Mid Channel

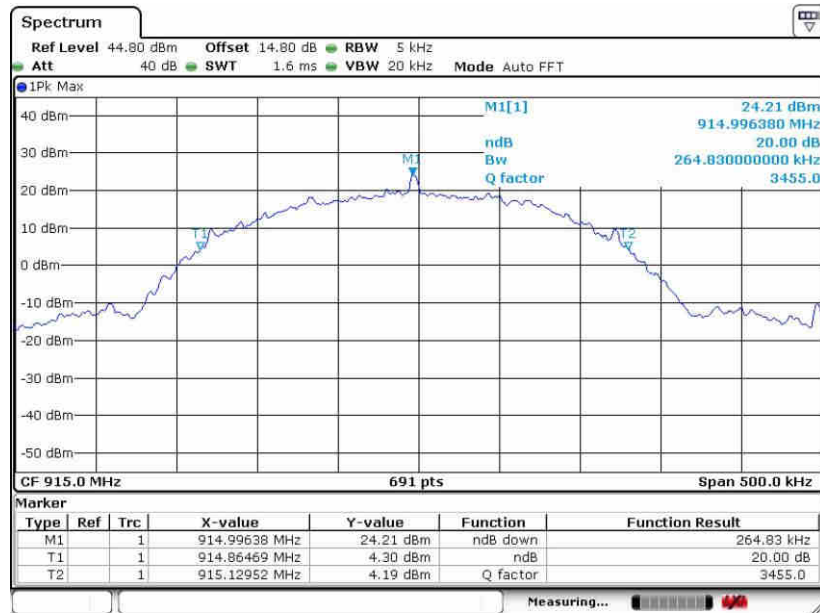

Date: 5 JAN 2021 13:39:40



20 dB Bandwidth Plot on High Channel

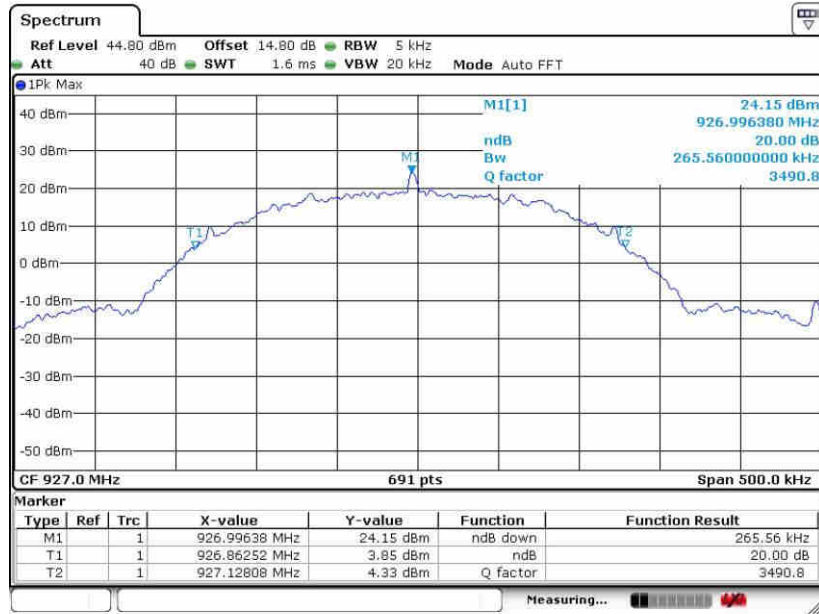

Date: 5 JAN 2021 13:43:25




3.4.6 Test Result of 99% Occupied Bandwidth


Please refer to Appendix A.

<Data Rate 50kbps>

99% Occupied Bandwidth Plot on Low Channel

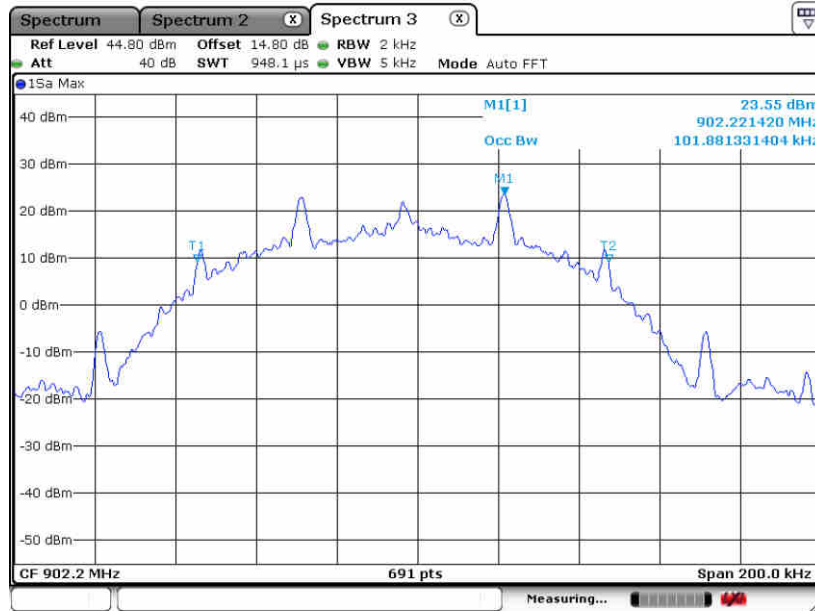


99% Occupied Bandwidth Plot on Mid Channel

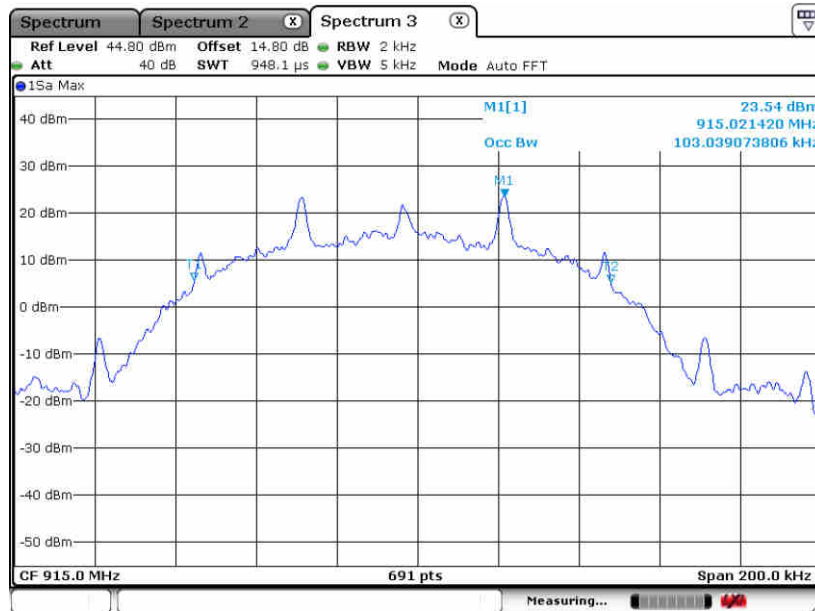




99% Occupied Bandwidth Plot on High Channel

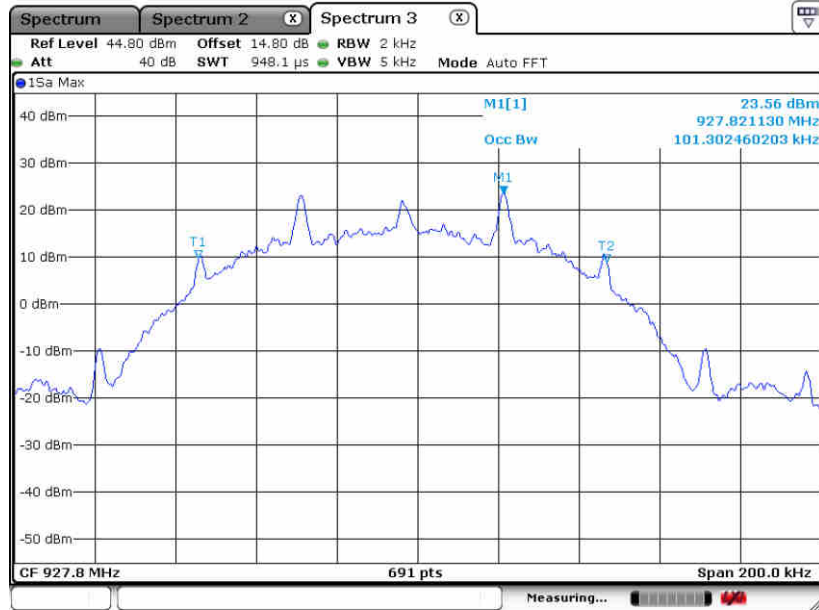

Date: 18 SEP.2020 15:05:42

<Data Rate 150kbps>


99% Occupied Bandwidth Plot on Low Channel

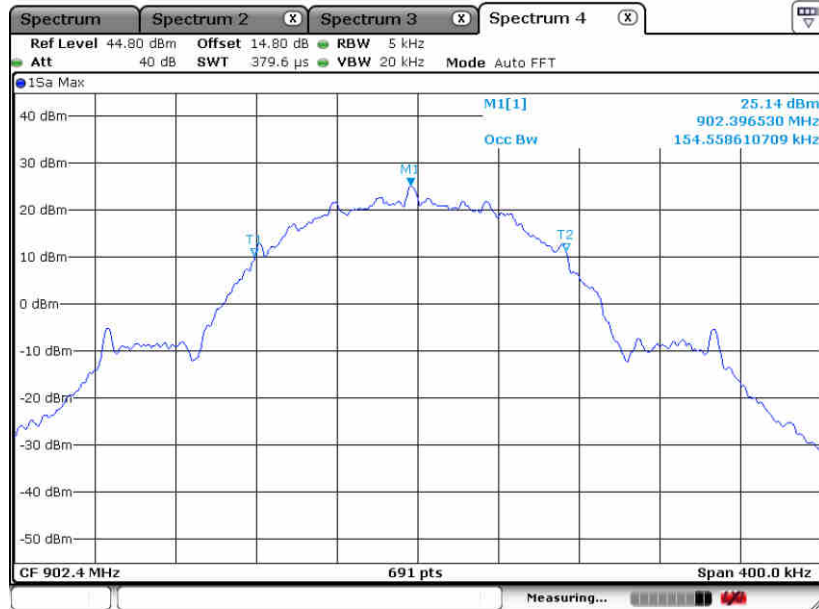

Date: 18 SEP.2020 17:20:49




99% Occupied Bandwidth Plot on Mid Channel

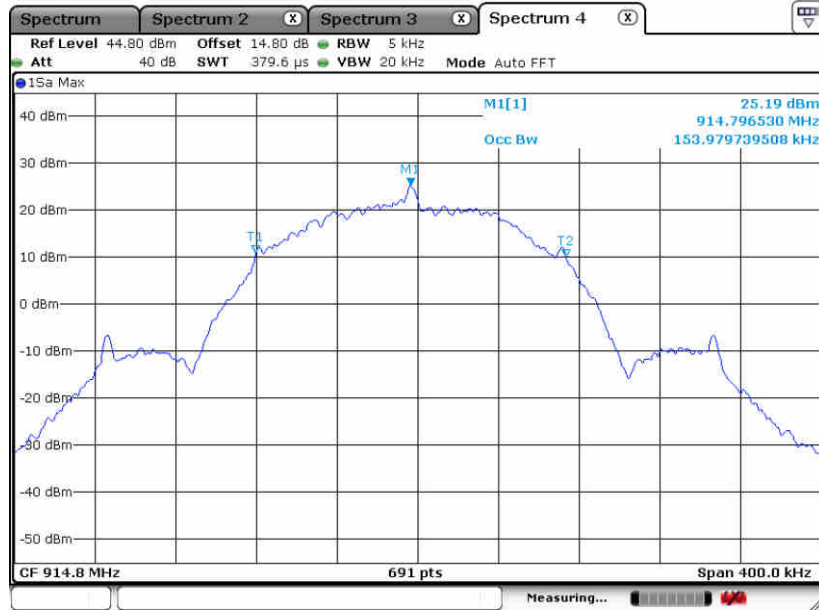

Date: 18 SEP. 2020 17:17:55

99% Occupied Bandwidth Plot on High Channel

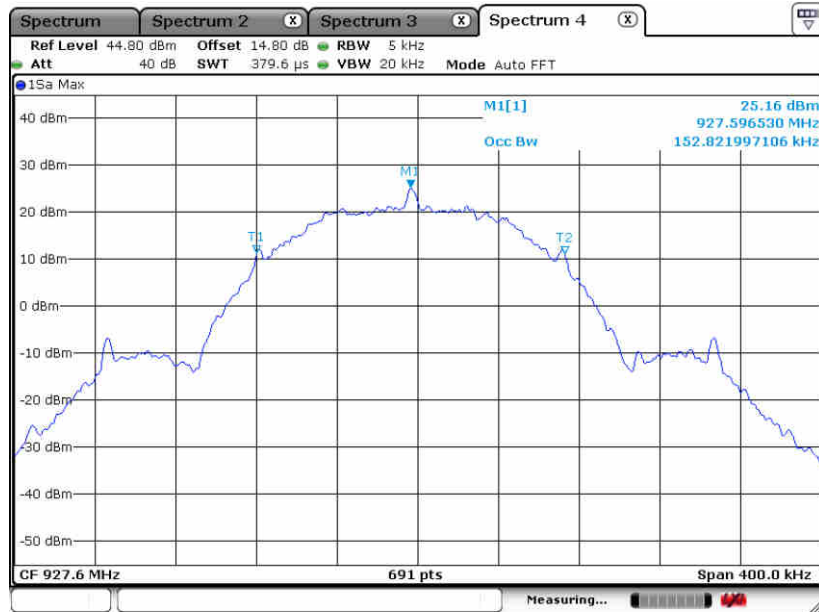


Date: 18 SEP. 2020 17:16:15




<Data Rate 250kbps>

99% Occupied Bandwidth Plot on Low Channel

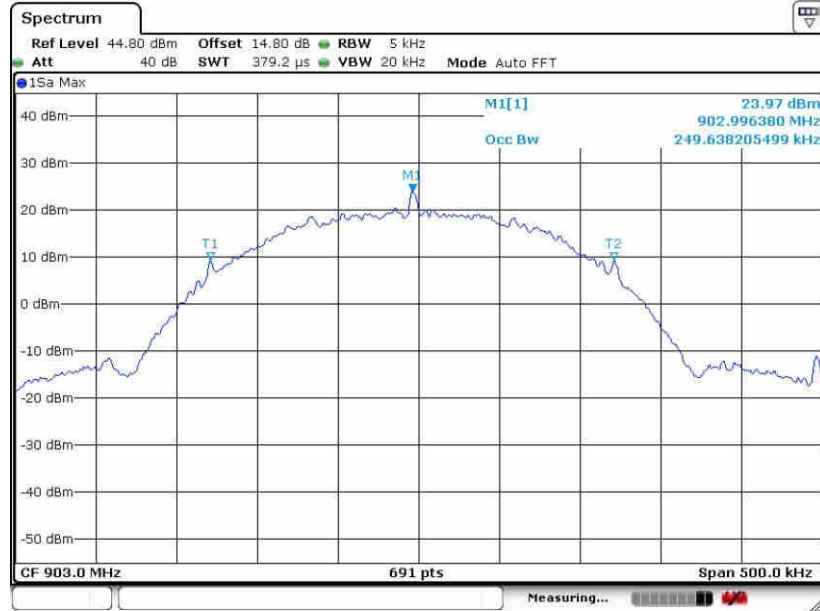


99% Occupied Bandwidth Plot on Mid Channel

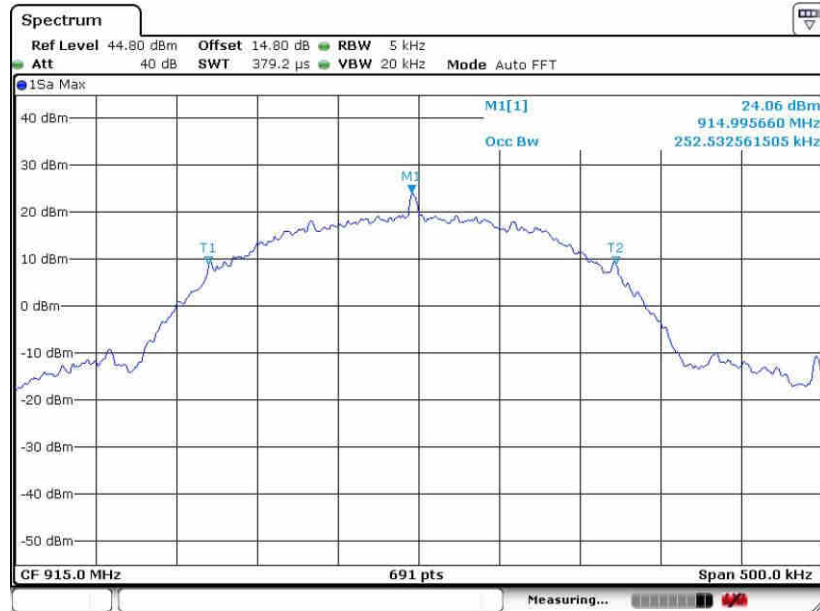



99% Occupied Bandwidth Plot on High Channel

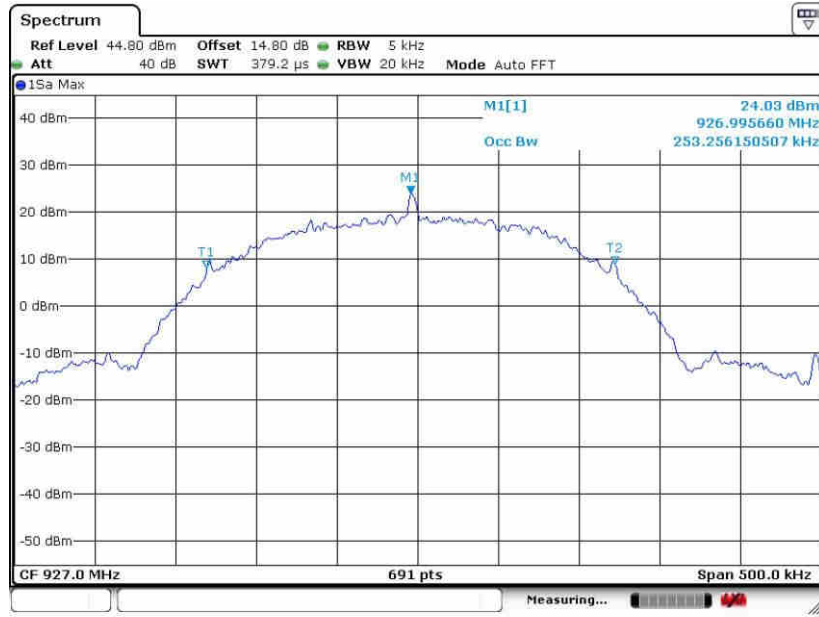

Date: 5 JAN 2021 13:46:07

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:
For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

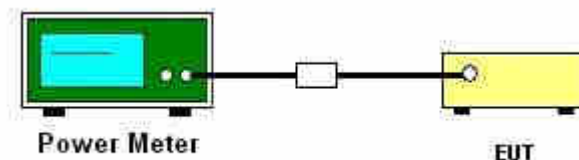

3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup







3.6.5 Test Result of Conducted Band Edges

<Data Rate 50kbps>

Low Band Edge Plot

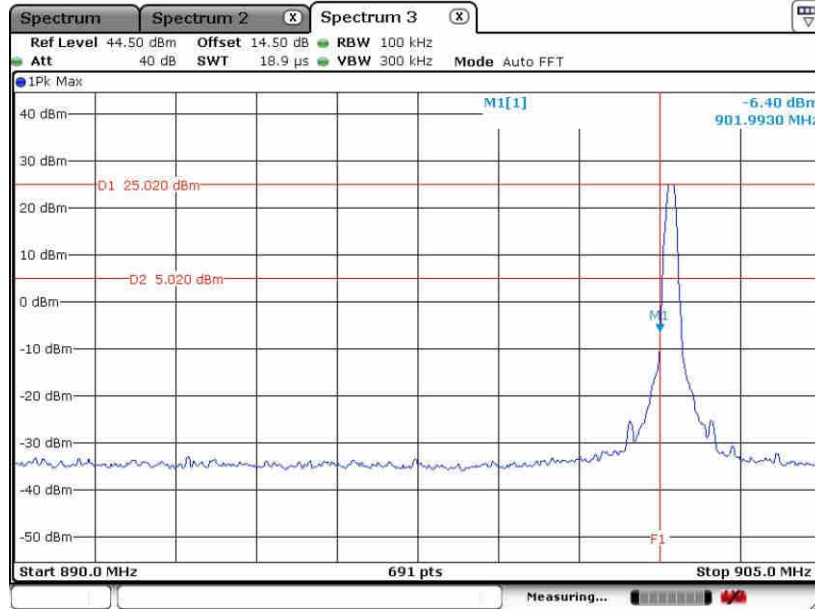


High Band Edge Plot

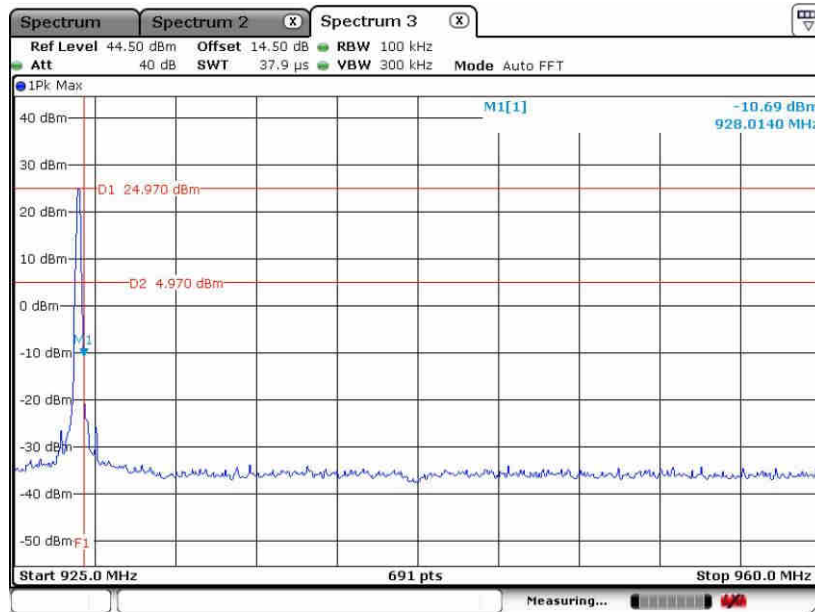




<Data Rate 150kbps>

Low Band Edge Plot

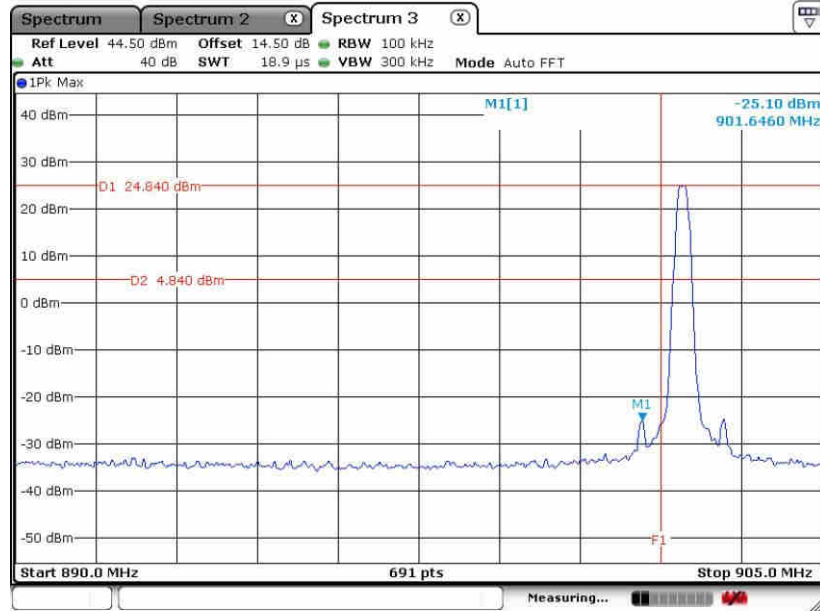

Date: 6 JAN 2021 13:23:58

High Band Edge Plot

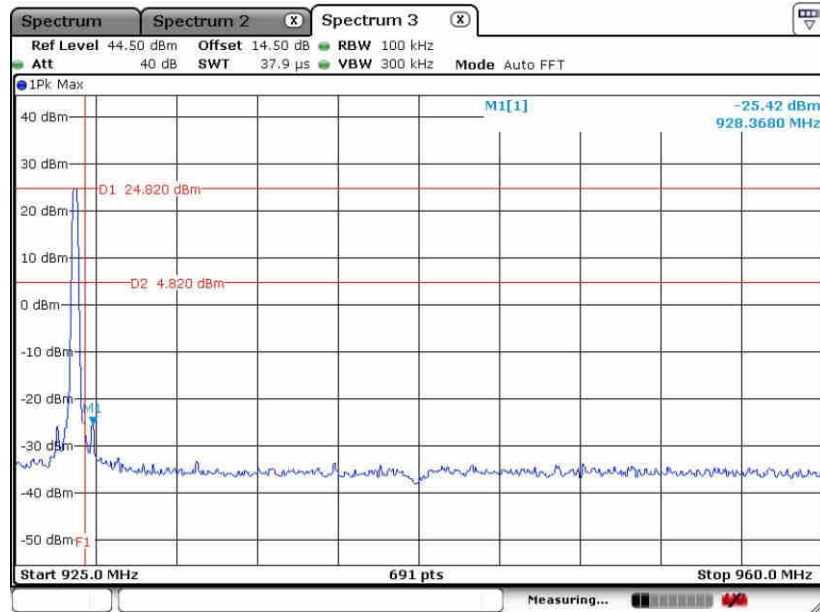


Date: 6 JAN 2021 13:30:12




<Data Rate 250kbps>

Low Band Edge Plot

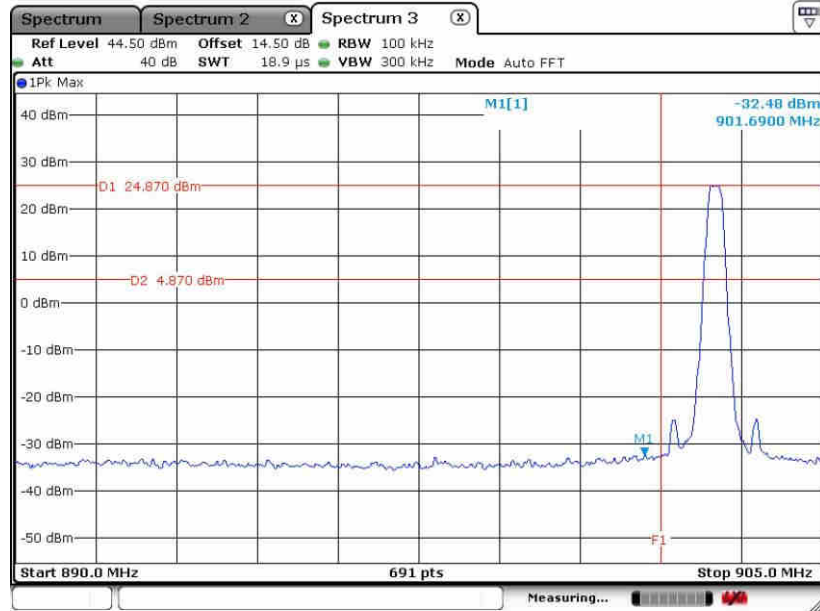

Date: 8 JAN 2021 13:42:01

High Band Edge Plot

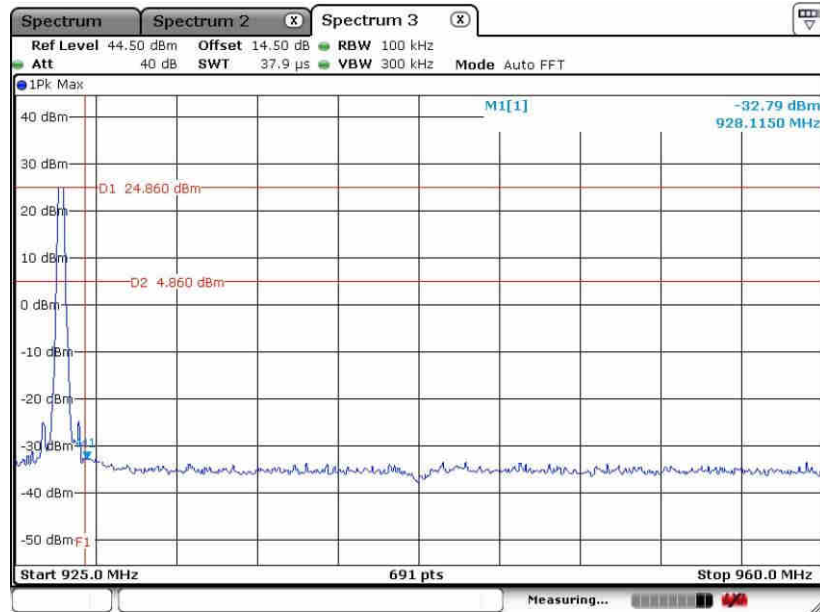


Date: 8 JAN 2021 13:50:45



3.6.6 Test Result of Conducted Hopping Mode Band Edges


<Data Rate 50kbps>

Hopping Mode Low Band Edge Plot

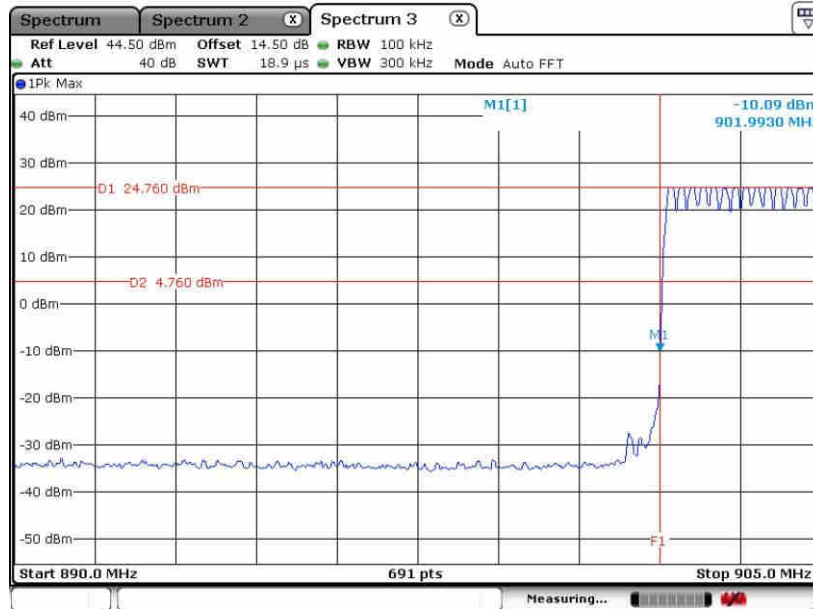

Date: 8 JAN 2021 12:07:34

Hopping Mode High Band Edge Plot

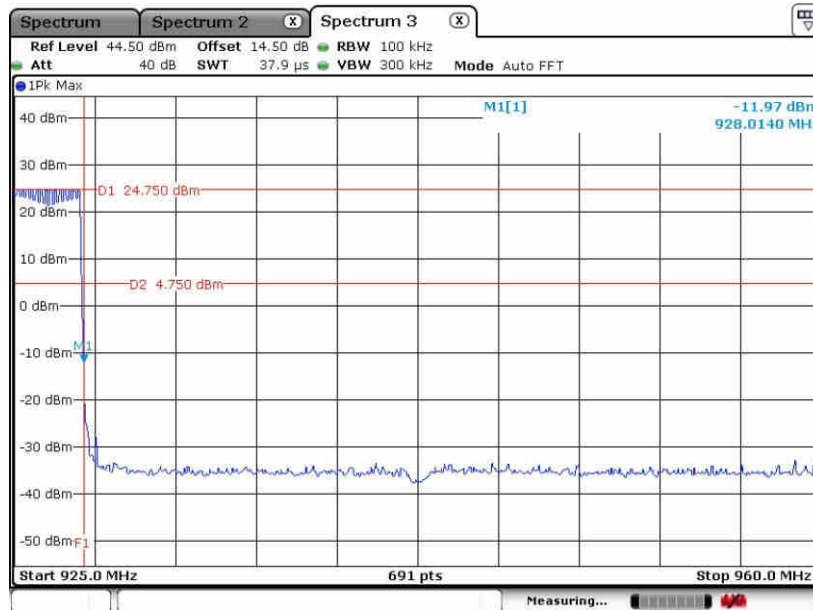


Date: 8 JAN 2021 12:13:01




<Data Rate 150kbps>

Hopping Mode Low Band Edge Plot

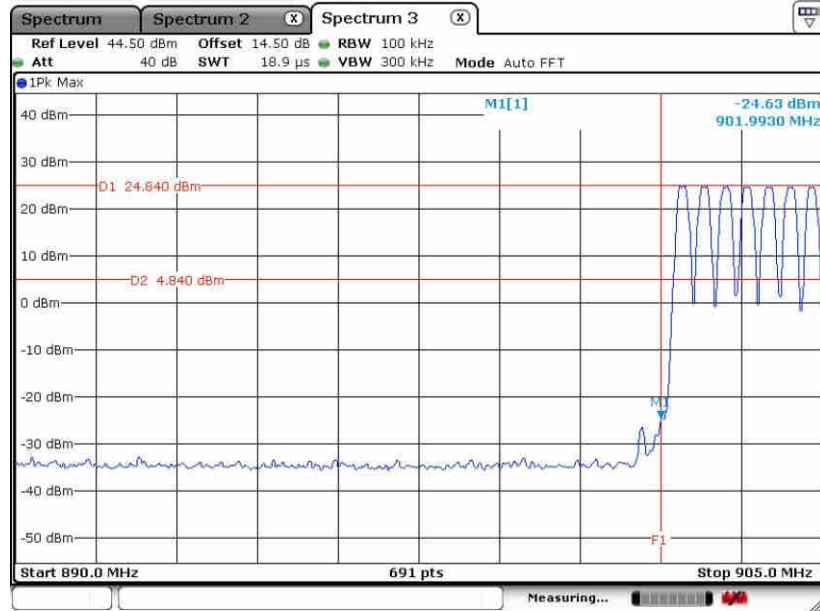

Date: 6 JAN 2021 13:25:30

Hopping Mode High Band Edge Plot

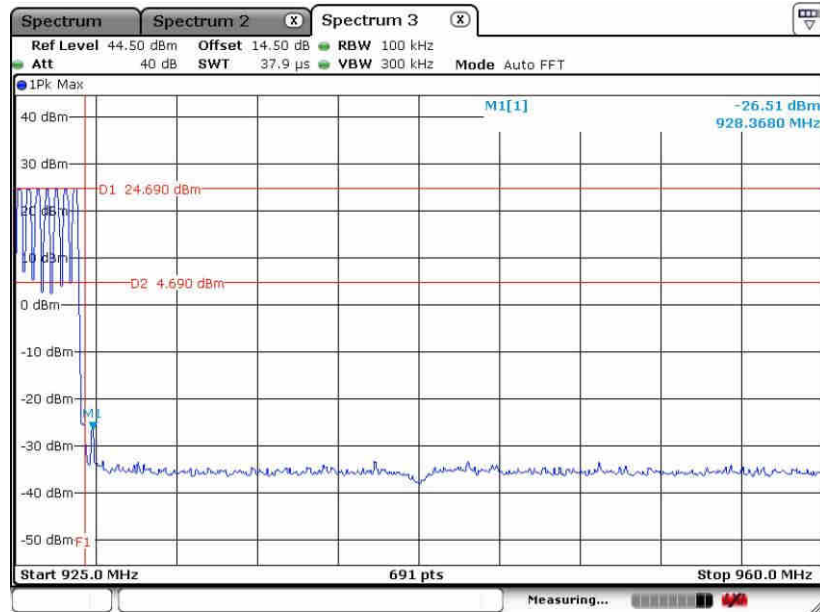


Date: 6 JAN 2021 13:31:05




<Data Rate 250kbps>

Hopping Mode Low Band Edge Plot

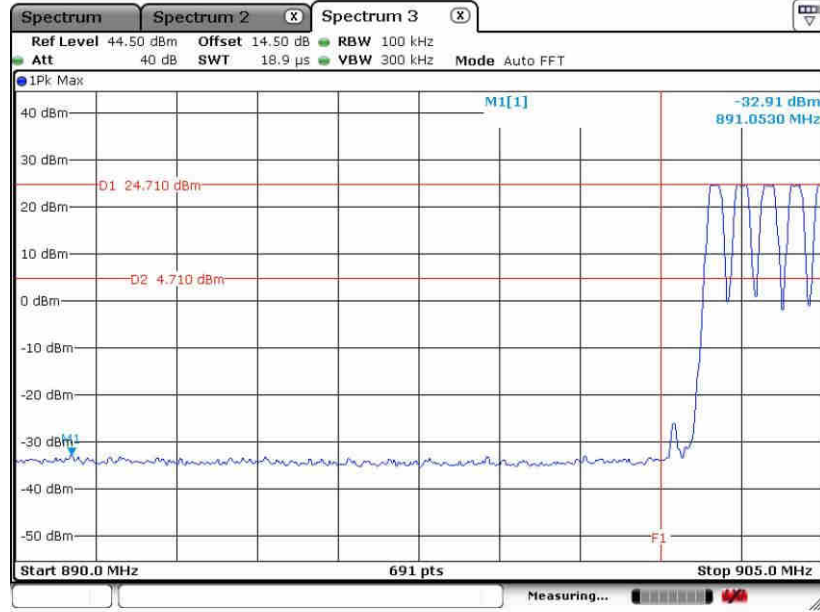

Date: 6 JAN 2021 13:45:30

Hopping Mode High Band Edge Plot

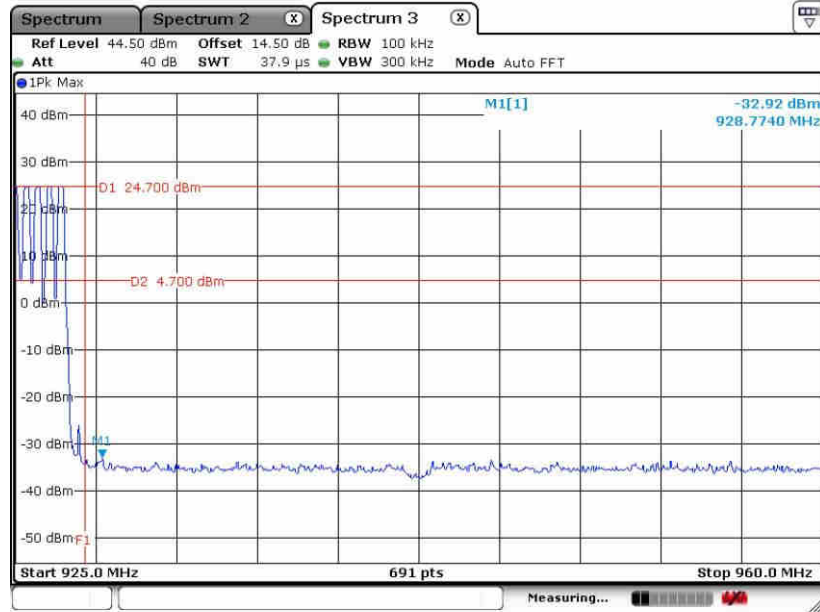

Date: 6 JAN 2021 13:52:19

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

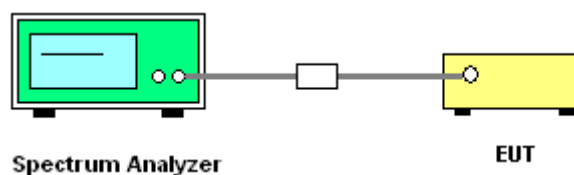





3.7.5 Test Result of Conducted Spurious Emission

<Data Rate 50kbps>

Low CH CSE Plot between 30MHz ~ 1 GHz

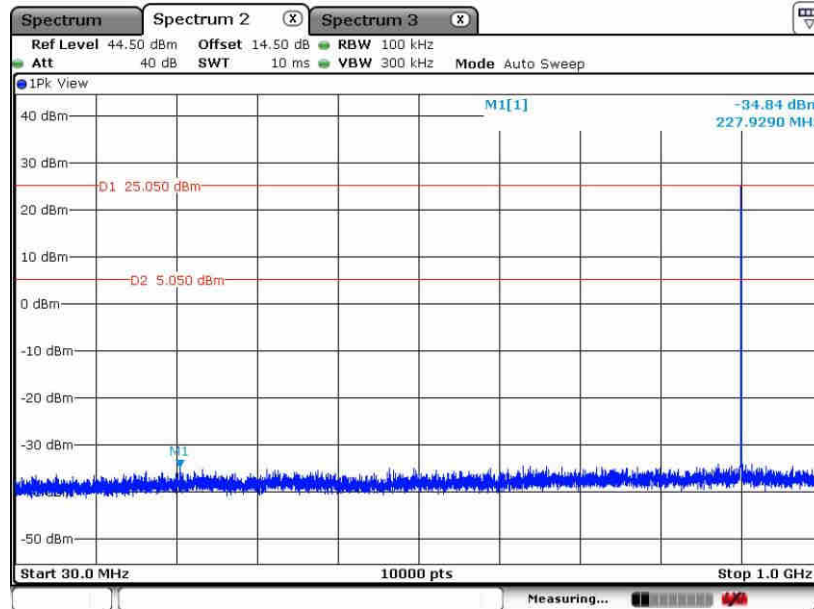


Low CH CSE Plot between 800 MHz ~ 10 GHz

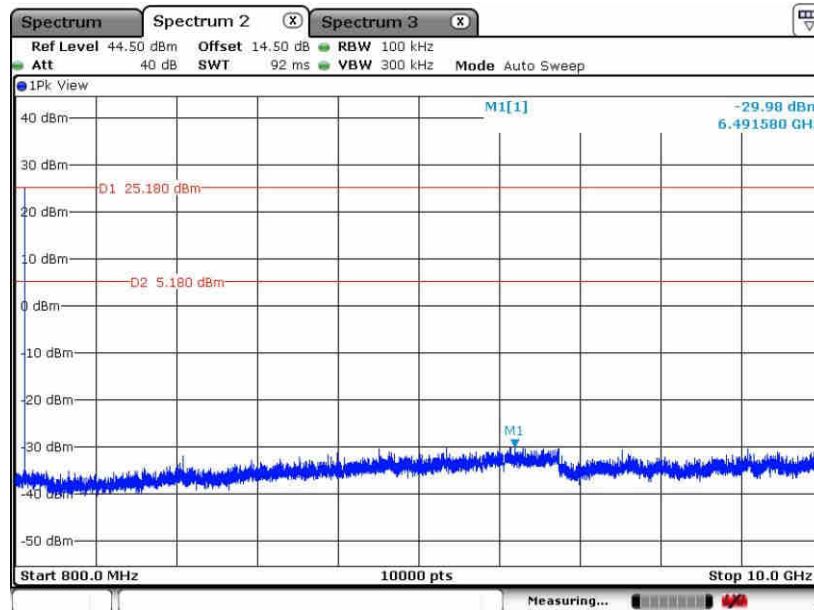




Mid CH CSE Plot between 30MHz ~ 1 GHz

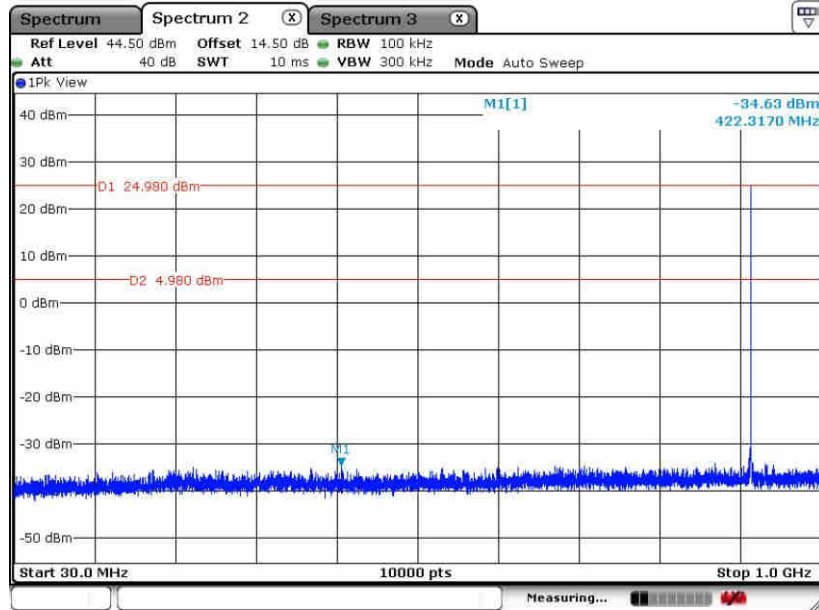

Date: 6 JAN.2021 12:08:42


Mid CH CSE Plot between 800 MHz ~ 10 GHz

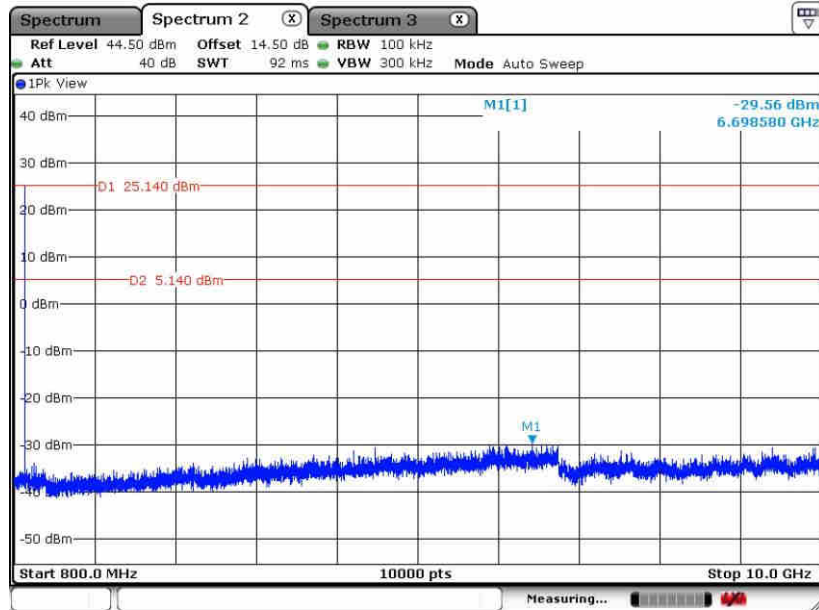


Date: 6 JAN.2021 12:09:18



High CH CSE Plot between 30MHz ~ 1 GHz

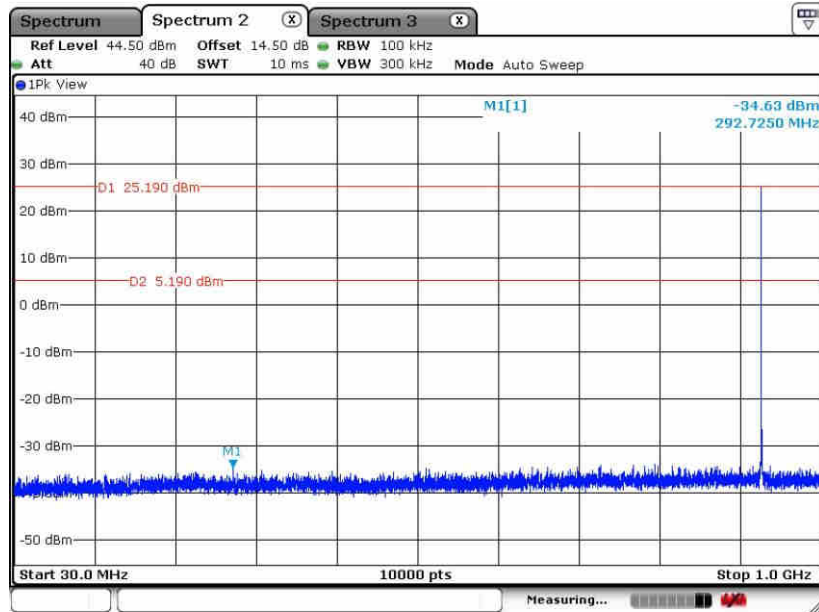


High CH CSE Plot between 800 MHz ~ 10 GHz

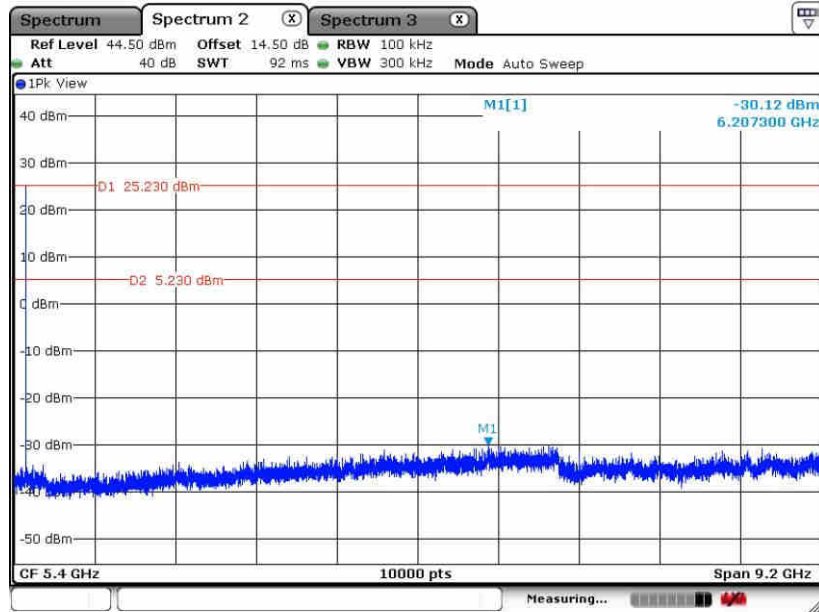




<Data Rate 150kbps>

Low CH CSE Plot between 30MHz ~ 1 GHz

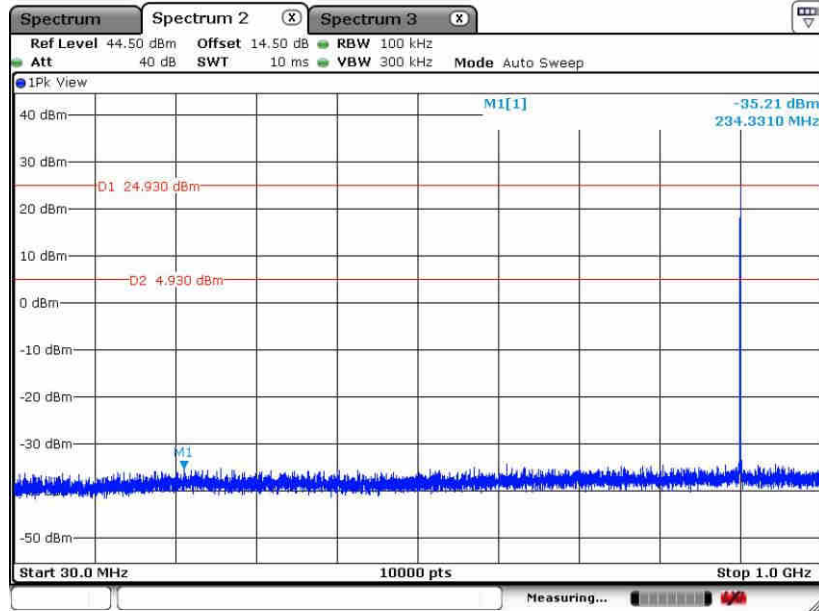


Low CH CSE Plot between 800 MHz ~ 10 GHz

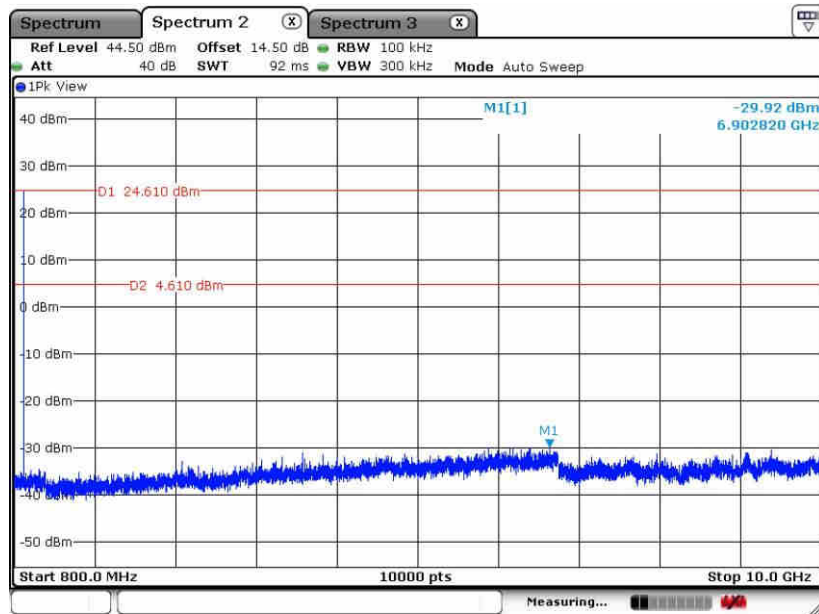




Mid CH CSE Plot between 30MHz ~ 1 GHz

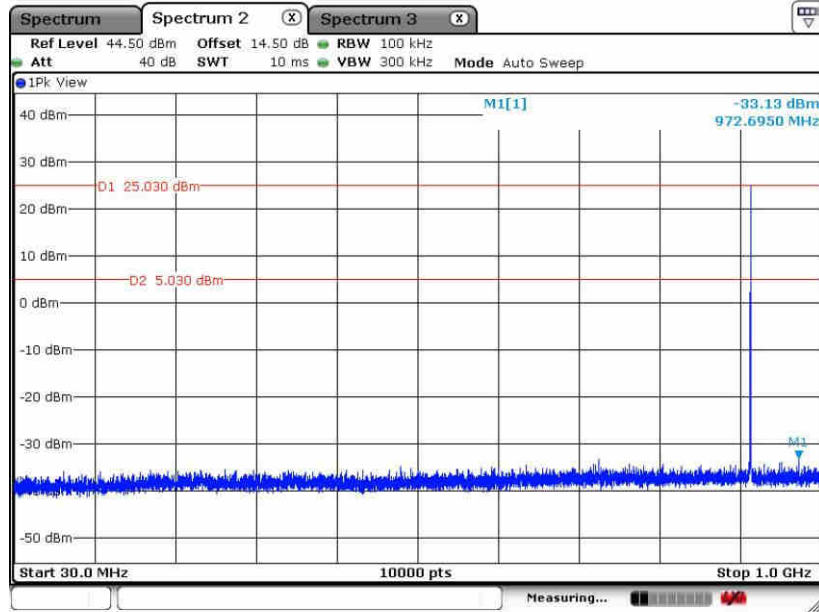

Date: 6 JAN 2021 13:27:23


Mid CH CSE Plot between 800 MHz ~ 10 GHz

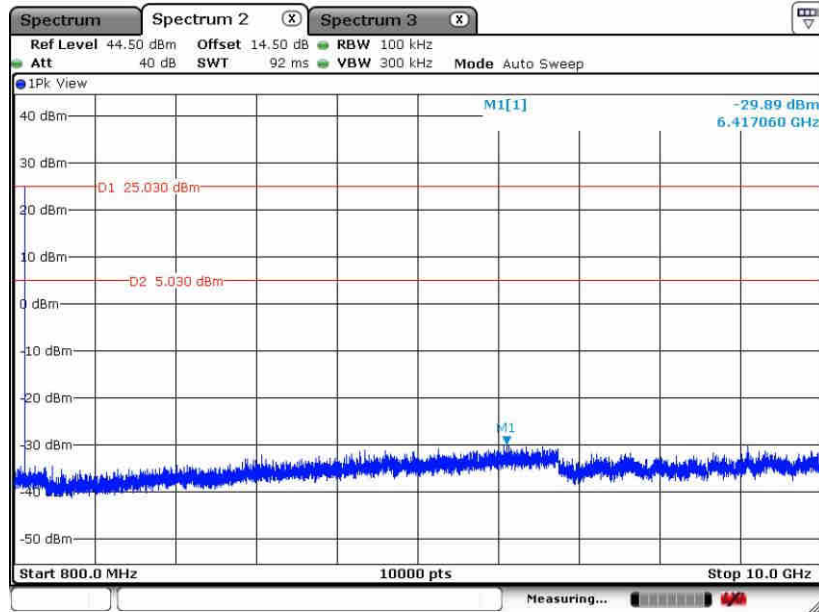

Date: 6 JAN 2021 13:26:46




High CH CSE Plot between 30MHz ~ 1 GHz

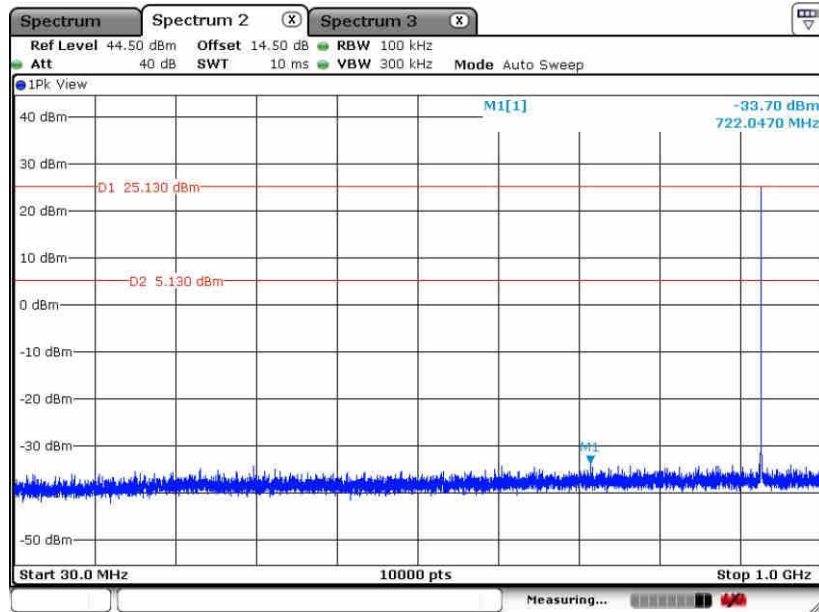

Date: 6 JAN 2021 13:28:46

High CH CSE Plot between 800 MHz ~ 10 GHz

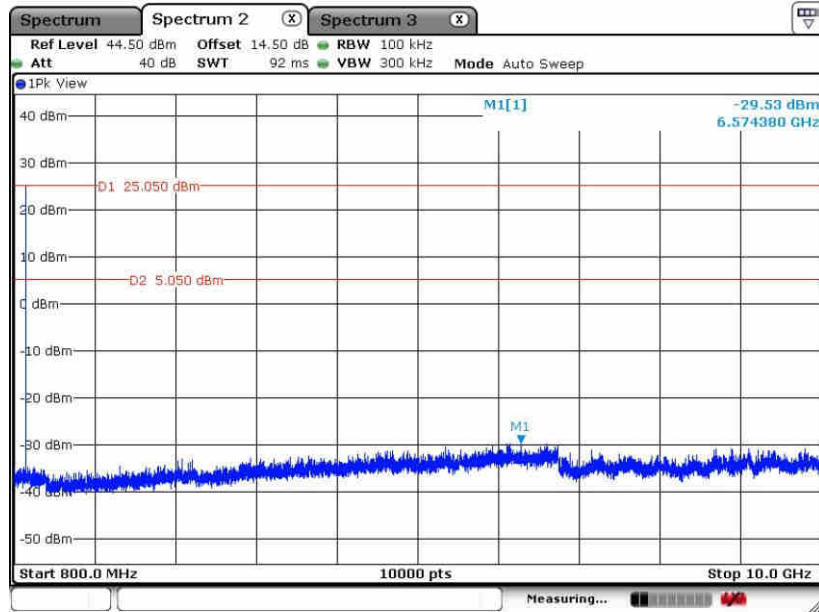


Date: 6 JAN 2021 13:29:25




<Data Rate 250kbps>

Low CH CSE Plot between 30MHz ~ 1 GHz

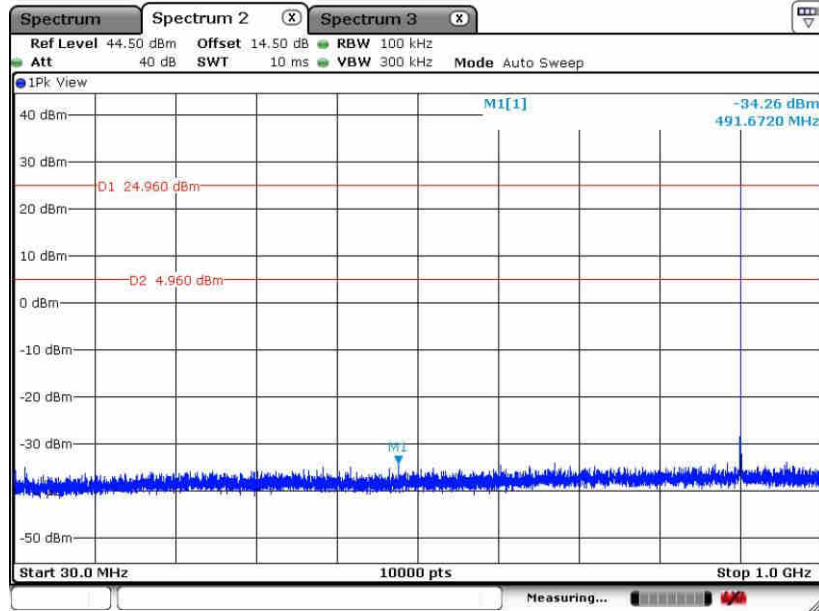

Date: 6 JAN 2021 13:40:38


Low CH CSE Plot between 800 MHz ~ 10 GHz

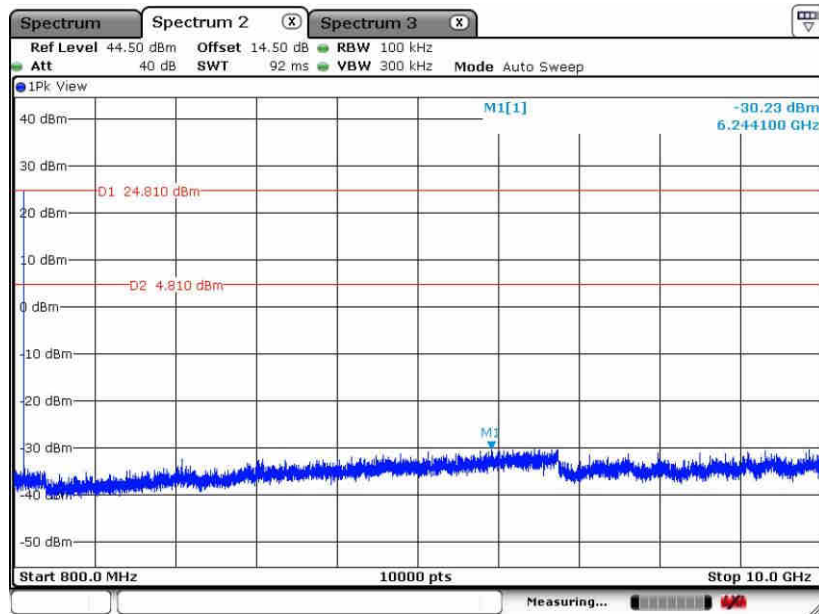

Date: 6 JAN 2021 13:40:06




Mid CH CSE Plot between 30MHz ~ 1 GHz

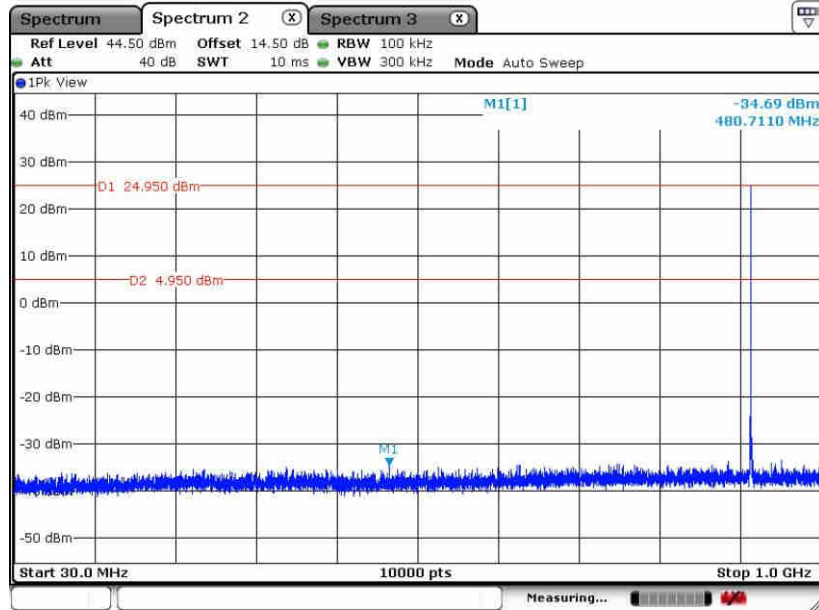

Date: 6 JAN 2021 13:46:45


Mid CH CSE Plot between 800 MHz ~ 10 GHz

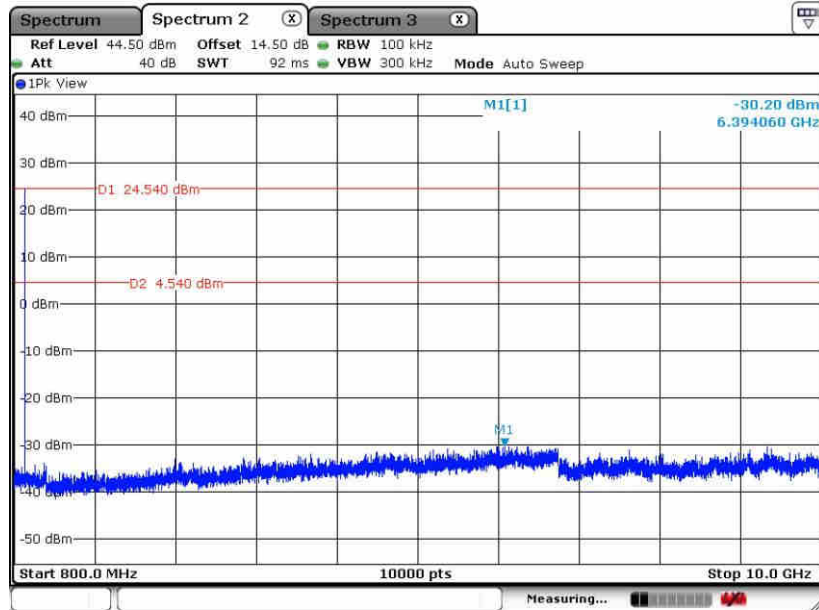

Date: 6 JAN 2021 13:47:20




High CH CSE Plot between 30MHz ~ 1 GHz

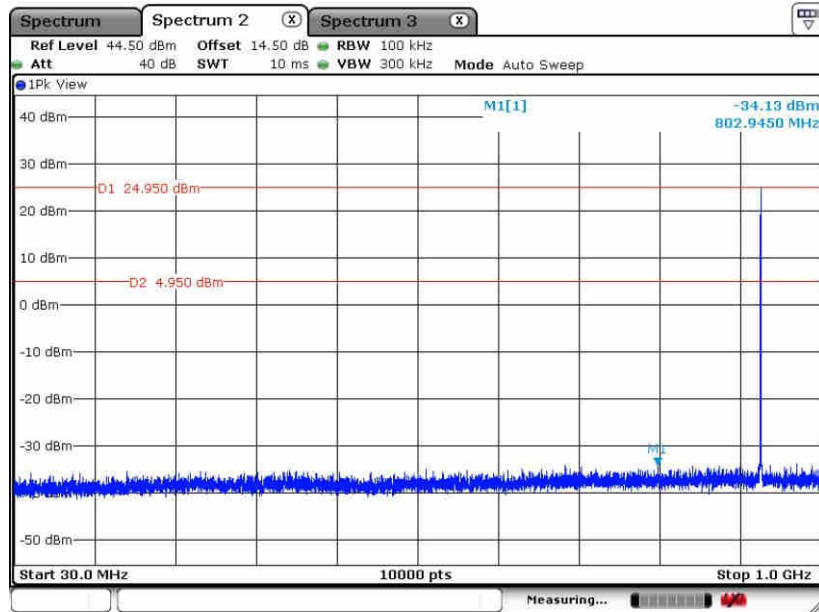

Date: 6 JAN 2021 13:49:23

High CH CSE Plot between 800 MHz ~ 10 GHz

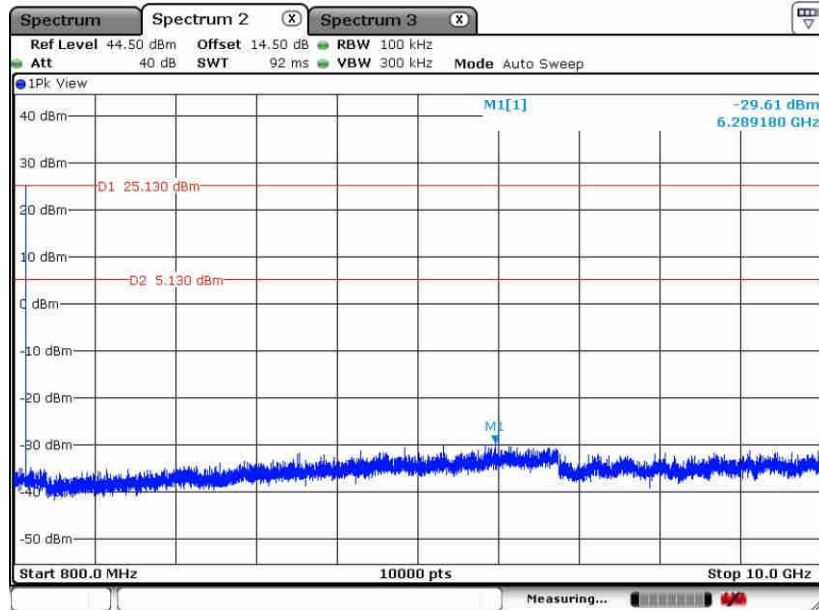

Date: 6 JAN 2021 13:48:53



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.8.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.8.4 Test Setup


For radiated emissions below 30MHz

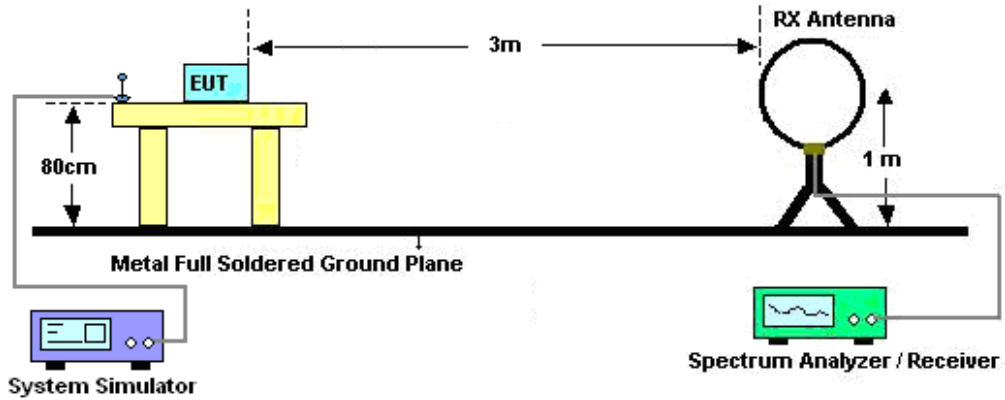

For radiated emissions from 30MHz to 1GHz

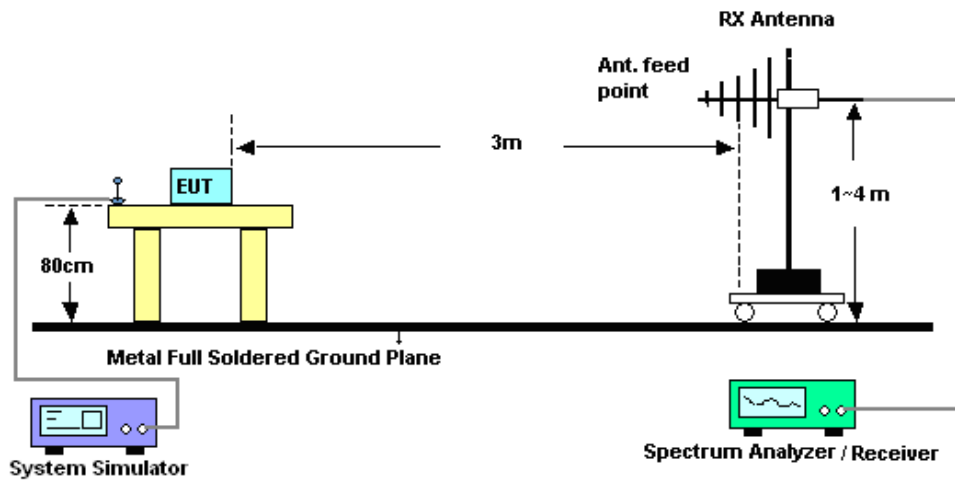

For radiated emissions above 1GHz

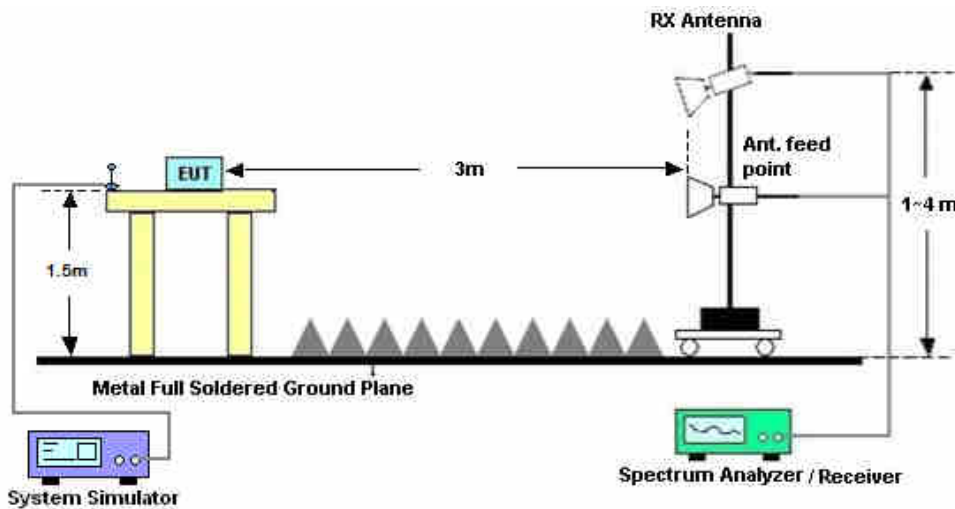



3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

9. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
10. Connect EUT to the power mains through a line impedance stabilization network (LISN).
11. All the support units are connecting to the other LISN.
12. The LISN provides 50 ohm coupling impedance for the measuring instrument.
13. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
14. Both sides of AC line were checked for maximum conducted interference.
15. The frequency range from 150 kHz to 30 MHz was searched.
16. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

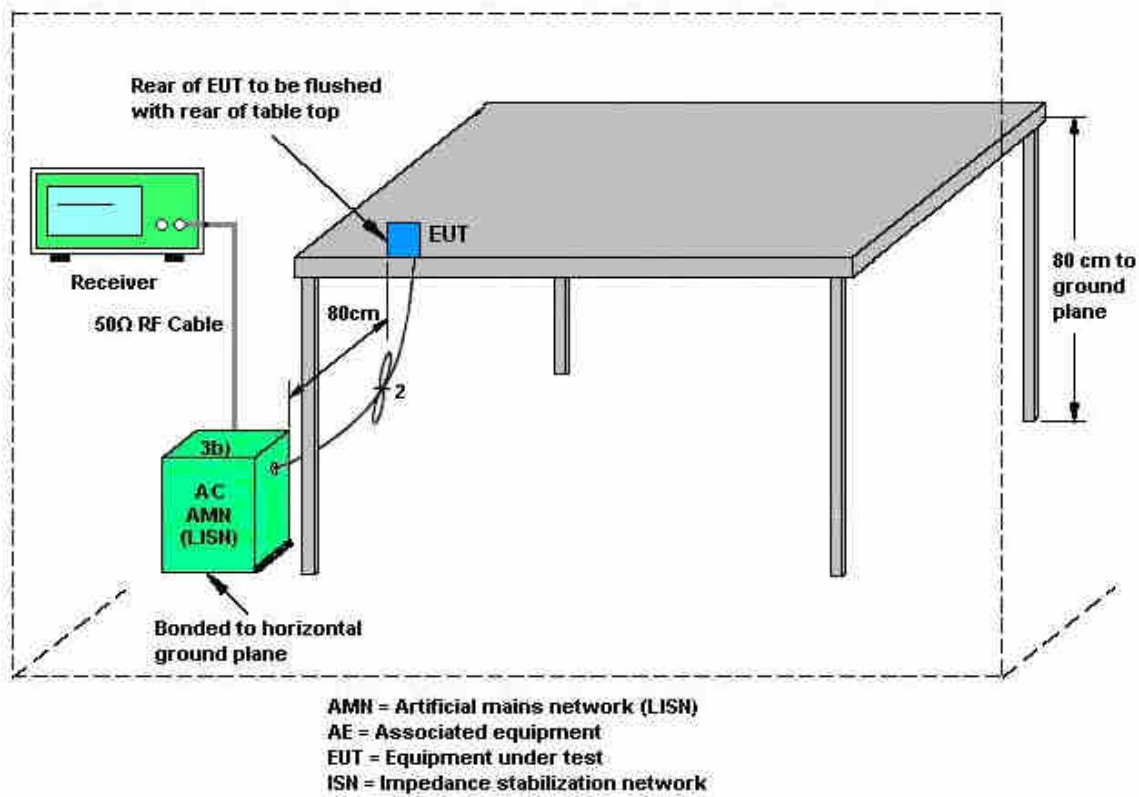

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2019	Sep. 18, 2020~ Jan. 08, 2021	Nov. 01, 2020	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 01, 2020		Oct. 31, 2021	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 15, 2020	Sep. 18, 2020~ Jan. 08, 2021	Jan. 14, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 08, 2020	Sep. 18, 2020~ Jan. 08, 2021	Jan. 07, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 07, 2021		Jan. 06, 2022	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 17, 2020	Dec. 19, 2020	Oct. 16, 2021	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz	Apr. 14, 2020	Dec. 19, 2020	Apr. 13, 2021	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 09, 2020	Dec. 19, 2020	Nov. 08, 2021	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 29, 2020	Dec. 19, 2020	May 28, 2021	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 27, 2020	Dec. 19, 2020	Apr. 26, 2021	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Apr. 14, 2020	Dec. 19, 2020	Apr. 13, 2021	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Jan. 02, 2020	Dec. 19, 2020	Jan. 01, 2021	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 15, 2020	Dec. 19, 2020	Apr. 14, 2021	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 19, 2020	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 19, 2020	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 19, 2020	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 14, 2020	Nov. 02, 2020	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	Nov. 02, 2020	Oct. 16, 2021	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2020	Nov. 02, 2020	Oct. 27, 2021	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	Nov. 02, 2020	Oct. 16, 2021	Conduction (CO01-KS)

NCR: No Calibration Required.



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------



Appendix A. Conducted Test Results

FSK-FHSS-50kbps

Test Engineer:	Aly Cao	Temperature:	20~26	°C
Test Date:	2020/9/18~2021/01/08	Relative Humidity:	40~51	%

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
FSK	50kbps	1	1	902.2	0.104	0.102	0.200	0.104	Pass
FSK	50kbps	1	65	915	0.104	0.103	0.250	0.104	Pass
FSK	50kbps	1	129	927.8	0.104	0.101	0.201	0.104	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	CH.	DT On-time per hop (ms)	Total hops over 20sec	Dwell Time (sec)	Limits (sec)	Pass/Fail
FSK	hopping	296.01	1.00	0.296	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

mode	Freq. (MHz)	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
FSK	902.2	1	24.96	30.00	Pass
	915	1	24.85	30.00	Pass
	927.8	1	25.05	30.00	Pass

TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Limits (Channel)	Pass/Fail
129	> 50	Pass

FSK-FHSS-150kbps**TEST RESULTS DATA****20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
FSK	150kbps	1	902.4	0.167	0.155	0.476	0.167	Pass
FSK	150kbps	1	914.8	0.167	0.154	0.486	0.167	Pass
FSK	150kbps	1	927.6	0.166	0.153	0.399	0.166	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	CH.	DT On-time per hop (ms)	Total hops over 20sec	Dwell Time (sec)	Limits (sec)	Pass/Fail
FSK	hopping	297.343	1.00	0.297	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

mode	Freq. (MHz)	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
FSK	902.4	1	24.72	30.00	Pass
	914.8	1	24.77	30.00	Pass
	927.6	1	24.93	30.00	Pass

TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Limits (Channel)	Pass/Fail
64	> 50	Pass

FSK-FHSS-250kbps**TEST RESULTS DATA****20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
FSK	250kbps	1	903	0.265	0.250	0.399	0.265	Pass
FSK	250kbps	1	915	0.265	0.253	0.542	0.265	Pass
FSK	250kbps	1	927	0.266	0.253	0.535	0.266	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	CH.	DT On-time per hop (ms)	Total hops over 10sec	Dwell Time (sec)	Limits (sec)	Pass/Fail
FSK	hopping	399.347	1.00	0.399	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

mode	Freq. (MHz)	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
FSK	903	1	23.87	23.979	Pass
	915	1	23.88	23.979	Pass
	927	1	23.93	23.979	Pass


TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Limits (Channel)	Pass/Fail
49	> 25	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line

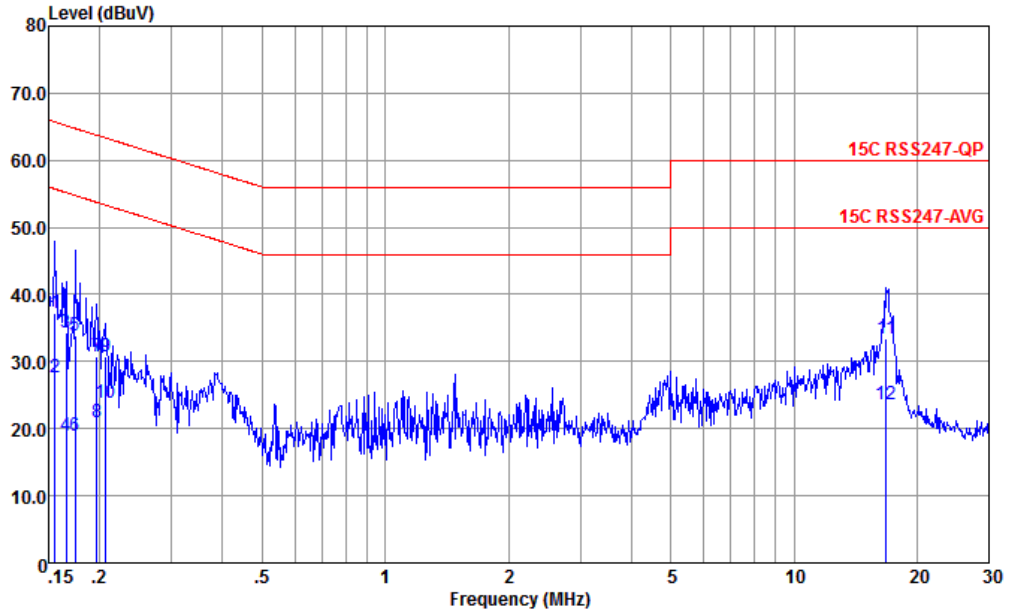


Site : CO01-KS
 Condition : 15C RSS247-QP LISN-L-191028-CN02 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.156	37.14	-28.55	65.69	26.60	0.07	10.47	QP
2	0.156	27.74	-27.95	55.69	17.20	0.07	10.47	Average
3	0.166	34.32	-30.84	65.16	23.80	0.08	10.44	QP
4	0.166	19.02	-36.14	55.16	8.50	0.08	10.44	Average
5	0.174	33.80	-30.97	64.77	23.30	0.08	10.42	QP
6	0.174	19.00	-35.77	54.77	8.50	0.08	10.42	Average
7	0.197	30.66	-33.10	63.76	20.20	0.09	10.37	QP
8	0.197	21.06	-32.70	53.76	10.60	0.09	10.37	Average
9	0.207	30.85	-32.47	63.32	20.40	0.09	10.36	QP
10	0.207	23.75	-29.57	53.32	13.30	0.09	10.36	Average
11	16.839	33.43	-26.57	60.00	21.19	1.80	10.44	QP
12 *	16.839	23.73	-26.27	50.00	11.49	1.80	10.44	Average



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

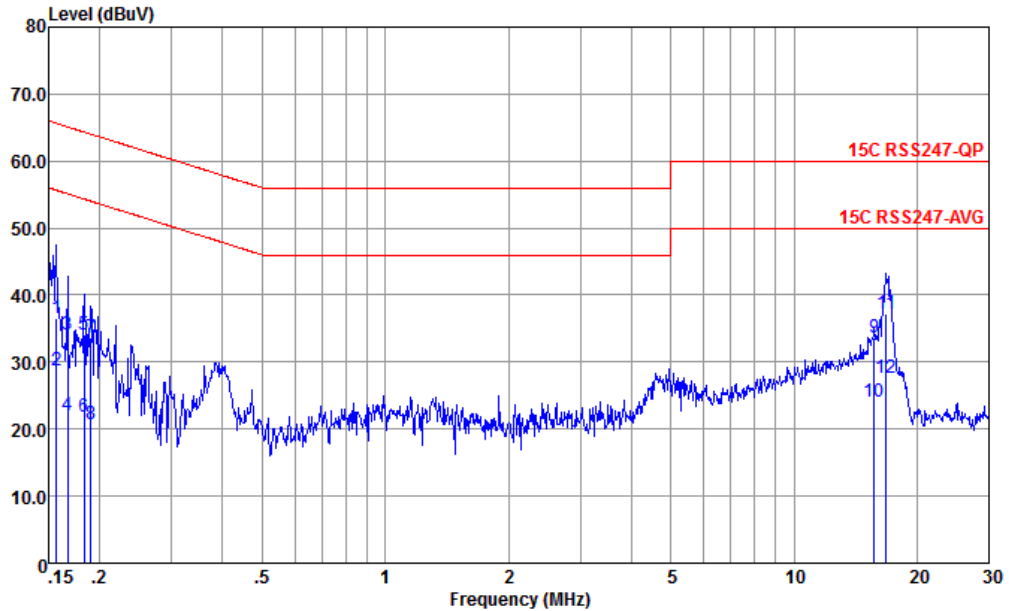

Site : CO01-KS
 Condition : 15C RSS247-QP LISN-N-191028-CN02 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.156	36.52	-29.13	65.65	25.91	0.15	10.46	QP
2	0.156	28.82	-26.83	55.65	18.21	0.15	10.46	Average
3	0.167	34.19	-30.93	65.12	23.59	0.16	10.44	QP
4	0.167	22.09	-33.03	55.12	11.49	0.16	10.44	Average
5	0.183	34.06	-30.27	64.33	23.50	0.16	10.40	QP
6	0.183	21.76	-32.57	54.33	11.20	0.16	10.40	Average
7	0.190	33.65	-30.37	64.02	23.11	0.16	10.38	QP
8	0.190	20.75	-33.27	54.02	10.21	0.16	10.38	Average
9	15.718	33.67	-26.33	60.00	21.20	2.06	10.41	QP
10	15.718	24.07	-25.93	50.00	11.60	2.06	10.41	Average
11	16.839	37.31	-22.69	60.00	24.59	2.28	10.44	QP
12 *	16.839	27.61	-22.39	50.00	14.89	2.28	10.44	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

FSK FHSS 50kbps (Band Edge @ 3m)

FSK FHSS	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
902.2MHz		870.02	41.43	-52.45	93.88	41.85	27.28	4.56	32.26	300	0	P	H
		902.03	113.88	-	-	114.01	27.42	4.65	32.2	300	0	P	H
		934.04	39.03	-54.85	93.88	38.68	27.74	4.74	32.13	300	0	P	H
		870.02	42.76	-52.45	95.21	43.18	27.28	4.56	32.26	100	0	P	V
		902.03	115.21	-	-	115.34	27.42	4.65	32.2	100	0	P	V
		934.04	42.35	-52.86	95.21	42	27.74	4.74	32.13	100	0	P	V
915MHz		882.63	40.76	-51.73	92.49	41.07	27.33	4.59	32.23	300	0	P	H
		914.64	112.49	-	-	112.43	27.55	4.68	32.17	300	0	P	H
		946.65	37.42	-55.07	92.49	36.88	27.87	4.78	32.11	300	0	P	H
		882.63	42.01	-52.94	94.95	42.32	27.33	4.59	32.23	100	0	P	V
		914.64	114.95	-	-	114.89	27.55	4.68	32.17	100	0	P	V
		946.65	41.27	-53.68	94.95	40.73	27.87	4.78	32.11	100	0	P	V
927.8MHz		896.21	40.94	-50.33	91.27	41.14	27.38	4.63	32.21	300	0	P	H
		928.22	111.27	-	-	111.01	27.68	4.72	32.14	300	0	P	H
		947.62	35.11	-56.16	91.27	34.55	27.88	4.78	32.1	300	0	P	H
		896.21	43.57	-51.62	95.19	43.77	27.38	4.63	32.21	100	0	P	V
		928.22	115.19	-	-	114.93	27.68	4.72	32.14	100	0	P	V
		960.23	42.2	-52.99	95.19	41.46	28	4.82	32.08	100	0	P	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. Non-restricted band limit is 100kHz-PSD down 20dB. 												



FSK FHSS 50kbps (Harmonic @ 3m)

FSK FHSS	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
902.2MHz		1801	44.96	-48.92	93.88	71.28	29.62	6.41	62.35	300	0	P	H
		2710	39.84	-34.16	74	61.87	32.04	7.94	62.01	300	0	P	H
		9928	56.2	-37.68	93.88	63.64	39.33	15.5	62.27	300	0	P	H
		1801	45.06	-50.15	95.21	71.38	29.62	6.41	62.35	100	0	P	V
		2706.6	38.8	-35.2	74	60.86	32.03	7.91	62	100	0	P	V
		9928	52.52	-42.69	95.21	59.96	39.33	15.5	62.27	100	0	P	V
915MHz		1828	50.45	-42.04	92.49	76.61	29.77	6.47	62.4	300	0	P	H
		2746	39.92	-34.08	74	61.9	32.06	7.99	62.03	300	0	P	H
		1828	51.5	-43.45	94.95	77.66	29.77	6.47	62.4	100	0	P	V
		2745	39.16	-34.84	74	61.14	32.06	7.99	62.03	100	0	P	V
927.8MHz		1855	53.25	-38.02	91.27	79.32	29.85	6.5	62.42	300	0	P	H
		2783.4	39.69	-34.31	74	61.61	32.09	8.04	62.05	300	0	P	H
		1855	55.85	-39.34	95.19	81.92	29.85	6.5	62.42	100	0	P	V
		2782	39.4	-34.6	74	61.32	32.09	8.04	62.05	100	0	P	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. Non-restricted band limit is 100kHz-PSD down 20dB. 												



FSK FHSS 150kbps (Band Edge @ 3m)

FSK FHSS	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
902.4MHz		870.02	41.72	-51.91	93.63	42.14	27.28	4.56	32.26	300	0	P	H
		902.03	113.63	-	-	113.76	27.42	4.65	32.2	300	0	P	H
		934.04	39.89	-53.74	93.63	39.54	27.74	4.74	32.13	300	0	P	H
		870.02	41.82	-53.74	95.56	42.24	27.28	4.56	32.26	100	0	P	V
		902.03	115.56	-	-	115.69	27.42	4.65	32.2	100	0	P	V
		934.04	41.26	-54.3	95.56	40.91	27.74	4.74	32.13	100	0	P	V
914.8MHz		882.63	39.41	-55.36	94.77	39.72	27.33	4.59	32.23	300	0	P	H
		914.64	114.77	-	-	114.71	27.55	4.68	32.17	300	0	P	H
		946.65	37.33	-57.44	94.77	36.79	27.87	4.78	32.11	300	0	P	H
		882.63	42.07	-53.72	95.79	42.38	27.33	4.59	32.23	100	0	P	V
		914.64	115.79	-	-	115.73	27.55	4.68	32.17	100	0	P	V
		946.65	41.25	-54.54	95.79	40.71	27.87	4.78	32.11	100	0	P	V
927.6MHz		895.24	40.9	-54.21	95.11	41.1	27.38	4.63	32.21	300	0	P	H
		927.25	115.11	-	-	114.87	27.67	4.72	32.15	300	0	P	H
		959.26	37.78	-57.33	95.11	37.06	27.99	4.81	32.08	300	0	P	H
		895.24	42.06	-53.79	95.85	42.26	27.38	4.63	32.21	100	0	P	V
		927.25	115.85	-	-	115.61	27.67	4.72	32.15	100	0	P	V
		959.26	41.89	-53.96	95.85	41.17	27.99	4.81	32.08	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. Non-restricted band limit is 100kHz-PSD down 20dB.												



FSK FHSS 150kbps (Harmonic @ 3m)

FSK FHSS	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
902.4MHz		1801	50.38	-43.25	93.63	76.7	29.62	6.41	62.35	300	0	P	H
		2710	40.07	-33.93	74	62.1	32.04	7.94	62.01	300	0	P	H
		9928	59.34	-34.29	93.63	66.78	39.33	15.5	62.27	300	0	P	H
		1801	49.3	-46.26	95.56	75.62	29.62	6.41	62.35	100	0	P	V
		2707.2	38.96	-35.04	74	61.02	32.03	7.91	62	100	0	P	V
		9928	55.16	-40.4	95.56	62.6	39.33	15.5	62.27	100	0	P	
914.8MHz		1828	51.04	-43.73	94.77	77.2	29.77	6.47	62.4	300	0	P	H
		2746	39.54	-34.46	74	61.52	32.06	7.99	62.03	300	0	P	H
		1828	52.23	-43.56	95.79	78.39	29.77	6.47	62.4	100	0	P	V
		2744.4	37.76	-36.24	74	59.74	32.06	7.99	62.03	100	0	P	V
927.6MHz		1855	53.48	-41.63	95.11	79.55	29.85	6.5	62.42	300	0	P	H
		2782.8	39.26	-34.74	74	61.18	32.09	8.04	62.05	300	0	P	H
		1855	55.89	-39.96	95.85	81.96	29.85	6.5	62.42	100	0	P	V
		2782	39.22	-34.78	74	61.14	32.09	8.04	62.05	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. Non-restricted band limit is 100kHz-PSD down 20dB.												



FSK FHSS 250kbps (Band Edge @ 3m)

FSK FHSS	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
903MHz		870.99	40.86	-53.33	94.19	41.28	27.28	4.56	32.26	300	0	P	H
		903	114.19	-	-	114.3	27.43	4.65	32.19	300	0	P	H
		935.01	38.66	-55.53	94.19	38.3	27.75	4.74	32.13	300	0	P	H
		870.99	41.53	-53.88	95.41	41.95	27.28	4.56	32.26	100	0	P	V
		903	115.41	-	-	115.52	27.43	4.65	32.19	100	0	P	V
		935.01	41.28	-54.13	95.41	40.92	27.75	4.74	32.13	100	0	P	V
915MHz		882.63	38.95	-55.8	94.75	39.26	27.33	4.59	32.23	300	0	P	H
		914.64	114.75	-	-	114.69	27.55	4.68	32.17	300	0	P	H
		946.65	38.74	-56.01	94.75	38.2	27.87	4.78	32.11	300	0	P	H
		882.63	40.53	-54.97	95.5	40.84	27.33	4.59	32.23	100	0	P	V
		914.64	115.5	-	-	115.44	27.55	4.68	32.17	100	0	P	V
		946.65	41.96	-53.54	95.5	41.42	27.87	4.78	32.11	100	0	P	V
927MHz		895.24	41.94	-51.52	93.46	42.14	27.38	4.63	32.21	300	0	P	H
		927.25	113.46	-	-	113.22	27.67	4.72	32.15	300	0	P	H
		959.26	35.31	-58.15	93.46	34.59	27.99	4.81	32.08	300	0	P	H
		895.24	41.59	-54.1	95.69	41.79	27.38	4.63	32.21	100	0	P	V
		927.25	115.69	-	-	115.45	27.67	4.72	32.15	100	0	P	V
		959.26	41.76	-53.93	95.69	41.04	27.99	4.81	32.08	100	0	P	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. Non-restricted band limit is 100kHz-PSD down 20dB. 												



FSK FHSS 250kbps (Harmonic @ 3m)

FSK FHSS	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
903MHz		1810	49.26	-44.93	94.19	75.49	29.7	6.44	62.37	300	0	P	H
		2710	41.27	-32.73	74	63.3	32.04	7.94	62.01	300	0	P	H
		9937	60.02	-34.17	94.19	67.41	39.35	15.52	62.26	300	0	P	H
		1810	49.14	-46.27	95.41	75.37	29.7	6.44	62.37	100	0	P	V
		2709	39.34	-34.66	74	61.37	32.04	7.94	62.01	100	0	P	V
		9937	55.04	-40.37	95.41	62.43	39.35	15.52	62.26	100	0	P	V
915MHz		1828	49.55	-45.2	94.75	75.71	29.77	6.47	62.4	300	0	P	H
		2746	40.55	-33.45	74	62.53	32.06	7.99	62.03	300	0	P	H
		1828	50.33	-45.17	95.5	76.49	29.77	6.47	62.4	100	0	P	V
		2745	38.68	-35.32	74	60.66	32.06	7.99	62.03	100	0	P	V
927MHz		1855	50.18	-43.28	93.46	76.25	29.85	6.5	62.42	300	0	P	H
		2781	39.96	-34.04	74	61.88	32.09	8.04	62.05	300	0	P	H
		1855	55.63	-40.06	95.69	81.7	29.85	6.5	62.42	100	0	P	V
		2782	37.98	-36.02	74	59.9	32.09	8.04	62.05	100	0	P	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. Non-restricted band limit is 100kHz-PSD down 20dB. 												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- 1. Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- 2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- 1. Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- 2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- 1. Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- 2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.