



# FCC Test Report

APPLICANT : Ring LLC  
EQUIPMENT : Video Doorbell Pro 2  
BRAND NAME : Ring  
MODEL NAME : 5AT2S2  
FCC ID : 2AEUPBHALP031  
STANDARD : 47 CFR Part 15 Subpart B  
CLASSIFICATION : Certification

The product was received on Sep. 08, 2020 and testing was completed on Nov. 02, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

*Jason Jia*

Reviewed by: Jason Jia / Supervisor

*James Huang*

Approved by: James Huang / Manager



**Sporton International (Kunshan) Inc.**

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1. GENERAL DESCRIPTION ..... 5**

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Product Feature of Equipment Under Test ..... 5

    1.4. Product Specification of Equipment Under Test ..... 6

    1.5. Modification of EUT ..... 6

    1.6. Test Location..... 7

    1.7. Test Software ..... 7

    1.8. Applicable Standards ..... 7

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8**

    2.1. Test Mode ..... 8

    2.2. Connection Diagram of Test System ..... 9

    2.3. Support Unit used in test configuration and system..... 9

    2.4. EUT Operation Test Setup..... 9

**3. TEST RESULT..... 10**

    3.1. Test of AC Conducted Emission Measurement ..... 10

    3.2. Test of Radiated Emission Measurement ..... 14

**4. LIST OF MEASURING EQUIPMENT..... 18**

**5. UNCERTAINTY OF EVALUATION..... 19**

**APPENDIX A. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 14.40 dB at 0.363 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 4.22 dB at 946.650 MHz for Quasi-Peak

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1. General Description

## 1.1. Applicant

Ring LLC  
1523 26th St, Santa Monica, CA 90404, USA

## 1.2. Manufacturer

Goertek Inc.  
No.268 Dongfang Road High-Tech Industrial Development District, Weifang Shandong, China

## 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Video Doorbell Pro 2
Brand Name	Ring
Model Name	5AT2S2
FCC ID	2AEUPBHALP031
EUT supports Radios application	WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE LoRa DTS/LoRa FHSS/FSK FHSS Radar
HW Version	R6
SW Version	7.1.61
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz LoRa DTS: 902.5 MHz ~ 926.5 MHz LoRa FHSS: 902.2 MHz ~ 927.8 MHz FSK FHSS: 902.2 MHz ~ 927.8 MHz Radar : 24.075GHz ~ 24.175GHz
<b>Rx Frequency</b>	802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz LoRa DTS: 902.5 MHz ~ 926.5 MHz LoRa FHSS: 902.2 MHz ~ 927.8 MHz FSK FHSS: 902.2 MHz ~ 927.8 MHz Radar : 24.075GHz ~ 24.175GHz
<b>Antenna Type</b>	WLAN : Loop Antenna Bluetooth : Loop Antenna LoRa : IFA Antenna FSK : IFA Antenna Radar: patch Antenna
<b>Type of Modulation</b>	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac : OFDM (BPSK / QPSK / 16QAM / 64QAM /256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) :π/4-DQPSK Bluetooth (3Mbps) : 8-DPSK LoRa FSK Radar : FMCW

### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH02-KS	CN1257	314309

### 1.7. Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode


The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: Lora Rx( Middle ) + Bluetooth Idle + WLAN (2.4G) Idle + Camera + 24G Radar Rx + Adapter + Battery 1 for Sample 1 Mode 2: Lora Rx ( Middle ) + Bluetooth Idle + WLAN (5G) Idle + Camera + 24G Radar Rx + Adapter + Battery 1 for Sample 1 Mode 3: Lora Rx( Middle ) + Bluetooth Idle + WLAN (2.4G) Idle + Camera + 24G Radar Rx + Charging from 24vac + Battery 1 for Sample 1 Mode 4: Lora Rx( Middle ) + Bluetooth Idle + WLAN (2.4G) Idle + Camera + 24G Radar Rx + Charging from 16vac + Battery 1 for Sample 1 Mode 5: Lora Rx( Middle ) + Bluetooth Idle + WLAN (2.4G) Idle + Camera + 24G Radar Rx + Charging from 16vac + Battery 2 for Sample 2
Radiated Emissions	Mode 1: Lora Rx( Middle ) + Bluetooth Idle + WLAN (2.4G) Idle + Camera + 24G Radar Rx + Adapter + Battery 1 for Sample 1 Mode 2: Lora Rx ( Middle ) + Bluetooth Idle + WLAN (5G) Idle + Camera + 24G Radar Rx + Adapter + Battery 1 for Sample 1 Mode 3: Lora Rx ( Middle ) + Bluetooth Idle + WLAN (5G) Idle + Camera + 24G Radar Rx + Charging from 24vac + Battery 1 for Sample 1 Mode 4: Lora Rx ( Middle ) + Bluetooth Idle + WLAN (5G) Idle + Camera + 24G Radar Rx + Charging from 16vac + Battery 1 for Sample 1 Mode 5: Lora Rx ( Middle ) + Bluetooth Idle + WLAN (5G) Idle + Camera + 24G Radar Rx + Adapter + Battery 2 for Sample 2
<b>Remark:</b> <ol style="list-style-type: none"> <li>The worst case of AC is mode 5; only the test data of this mode is reported.</li> <li>The worst case of RE is mode 2; only the test data of this mode is reported.</li> <li>Pre-scanned Low/Middle/High channel for Lora, the worst channel was recorded in this report</li> <li>There are two types of EUT. The difference between the two samples is that the battery and E-CAP (capacitance) is different, the others are the same. So we chose sample1 to perform all tests, and sample2 verify the worst mode of sample1.</li> </ol>	



## 2.2. Connection Diagram of Test System

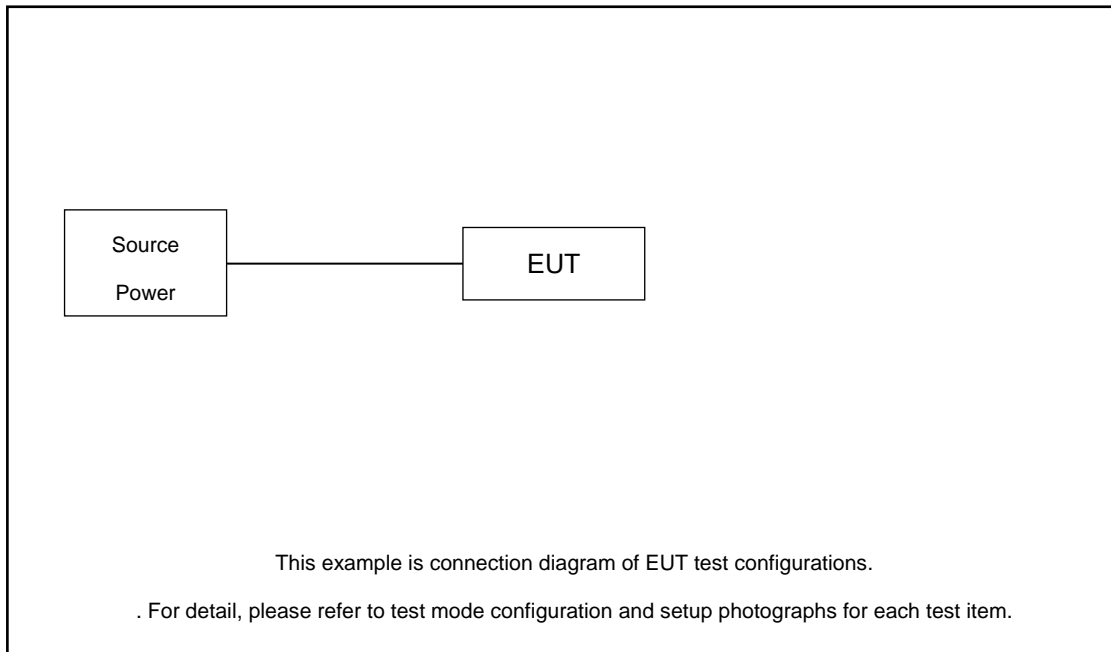

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

## 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Phone	MOTO	XT1952-1	XXXX	N/A	N/A
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m

## 2.4. EUT Operation Test Setup

The EUT was set in engineer test mode by software controlled via Notebook, and make the Bluetooth/WLAN/Lora/Radar in idle mode.

1. Turn on camera to capture images.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.1.4 Test Setup

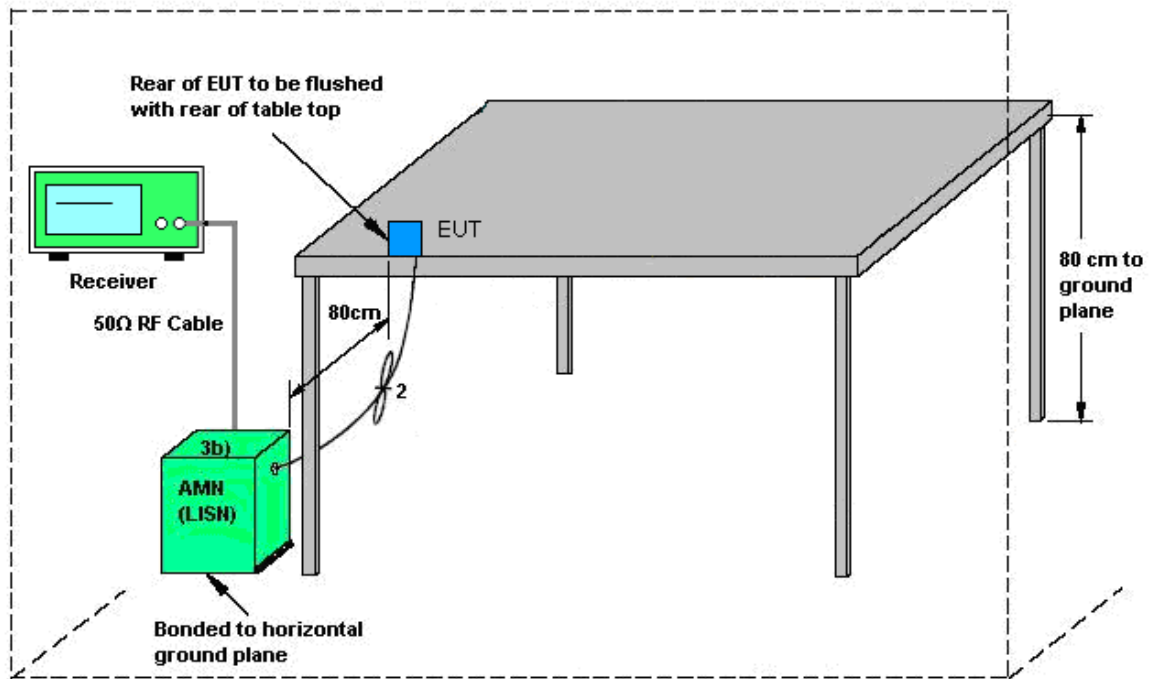

AMN = Artificial mains network (LISN)  
AE = Associated equipment  
EUT = Equipment under test  
ISN = Impedance stabilization network




3.1.5 Test Result of AC Conducted Emission

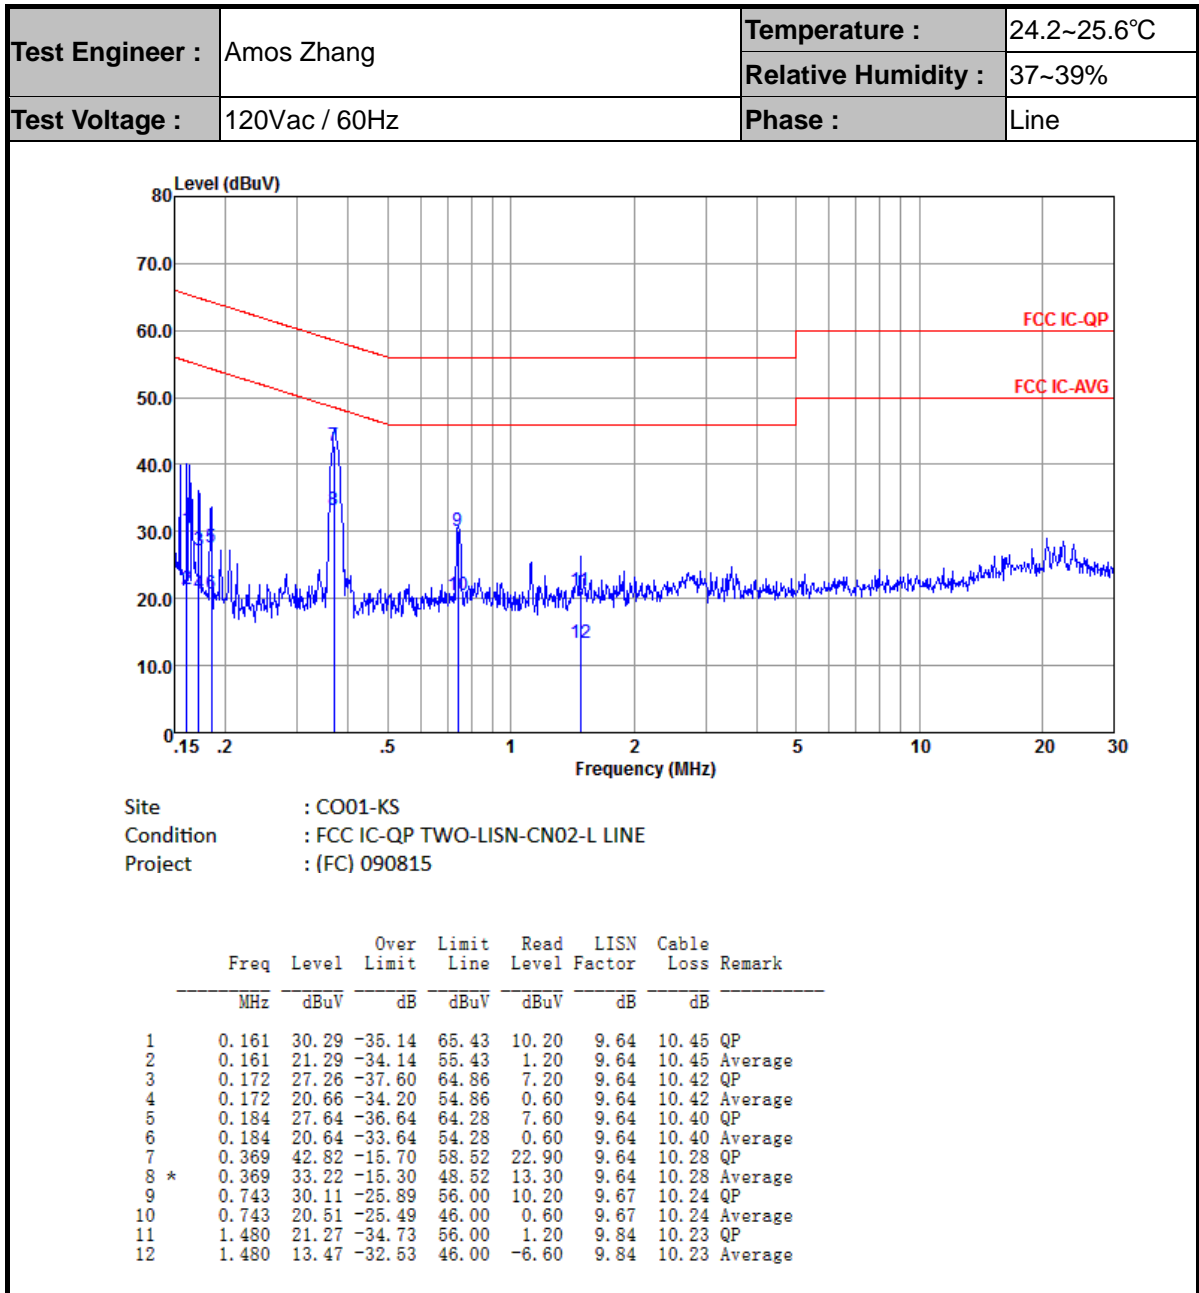



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

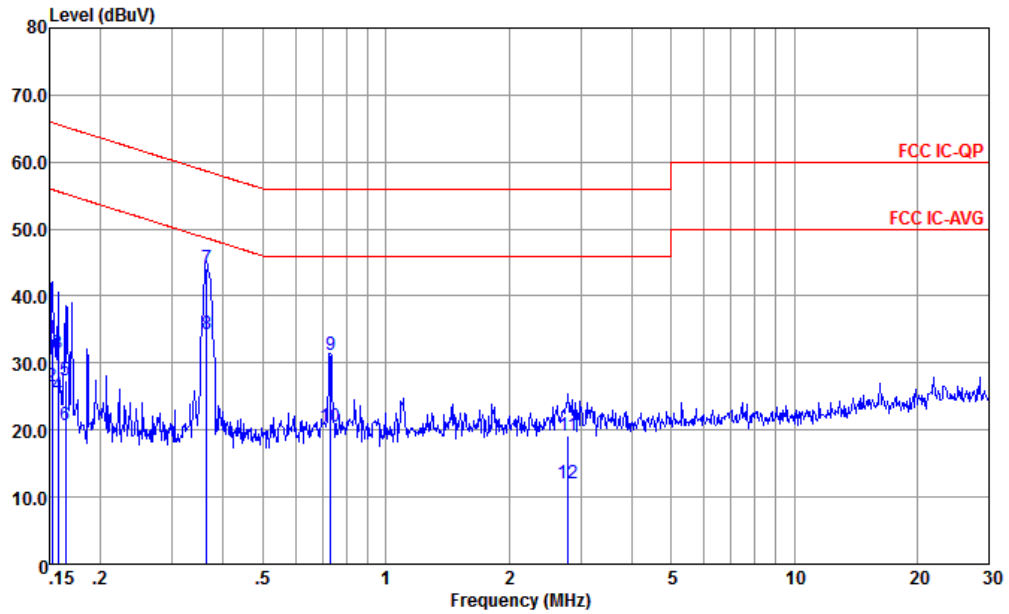

Site : CO01-KS  
 Condition : FCC IC-QP TWO-LISN-CN02-N NEUTRAL  
 Project : (FC) 090815

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.152	33.57	-32.30	65.87	13.30	9.80	10.47	QP
2	0.152	26.57	-29.30	55.87	6.30	9.80	10.47	Average
3	0.157	31.47	-34.13	65.60	11.20	9.81	10.46	QP
4	0.157	25.07	-30.53	55.60	4.80	9.81	10.46	Average
5	0.164	27.47	-37.78	65.25	7.20	9.83	10.44	QP
6	0.164	20.77	-34.48	55.25	0.50	9.83	10.44	Average
7	0.363	44.15	-14.50	58.65	24.10	9.77	10.28	QP
8 *	0.363	34.25	-14.40	48.65	14.20	9.77	10.28	Average
9	0.731	31.26	-24.74	56.00	11.30	9.72	10.24	QP
10	0.731	20.46	-25.54	46.00	0.50	9.72	10.24	Average
11	2.794	19.08	-36.92	56.00	-1.21	10.05	10.24	QP
12	2.794	11.98	-34.02	46.00	-8.31	10.05	10.24	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

## 3.2. Test of Radiated Emission Measurement

### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

### 3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBµV/m) = 20 log Emission level (µV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

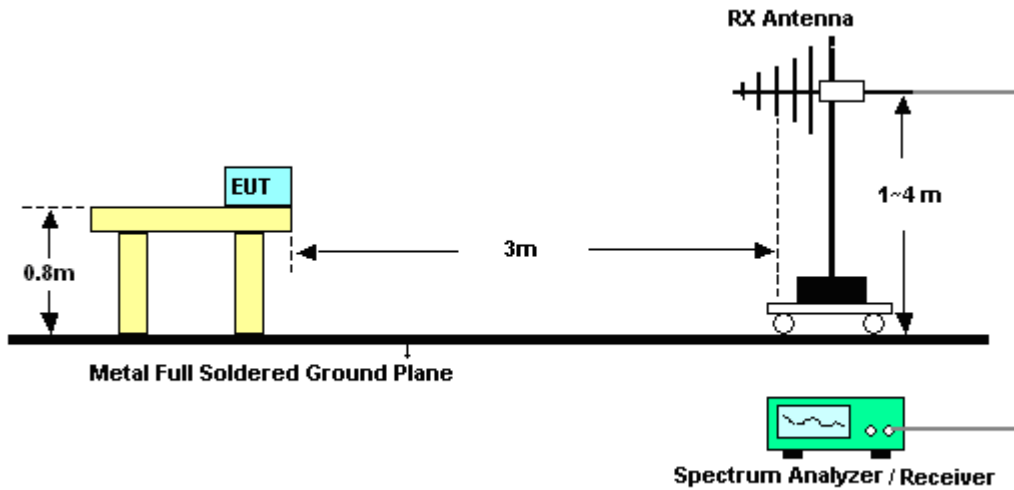


For radiated emissions above 1GHz

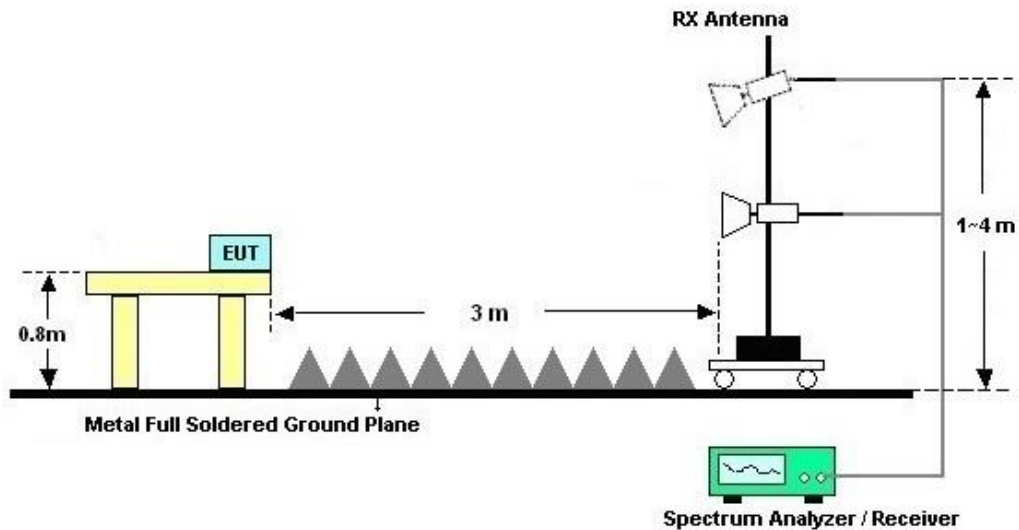



3.2.5. Test Result of Radiated Emission

Test Engineer :	Winter Zhao	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#6 is system simulator signal which can be ignored.		

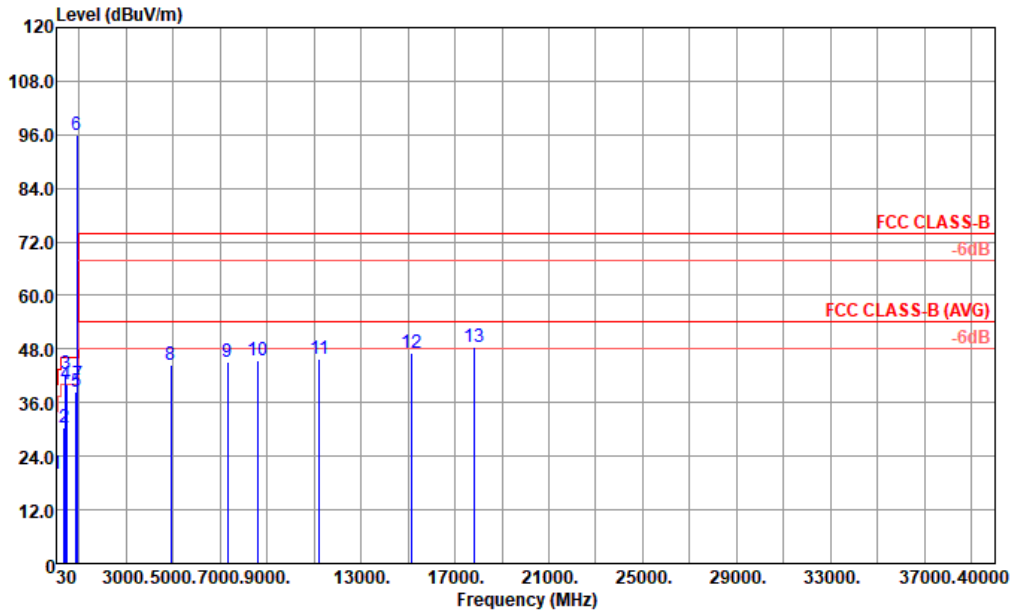


Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m LF 6111D SN44483 HORIZONTAL  
 Project : (FC)090815

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	31.94	19.94	-20.06	40.00	26.82	24.04	1.28	32.20	---	---	Peak
2	377.26	30.34	-15.66	46.00	37.07	21.14	4.38	32.25	---	---	Peak
3	437.40	42.52	-3.48	46.00	47.24	22.80	4.71	32.23	---	---	Peak
4	450.98	40.11	-5.89	46.00	44.40	23.12	4.79	32.20	100	158	QP
5	882.63	38.57	-7.43	46.00	34.99	29.17	6.68	32.27	---	---	Peak
6	915.61	95.85			91.55	29.70	6.80	32.20	---	---	Peak
7	946.65	40.21	-5.79	46.00	34.61	30.89	6.91	32.20	---	---	Peak
8	4920.00	44.47	-29.53	74.00	27.72	35.57	13.47	32.29	---	---	Peak
9	7336.00	45.08	-28.92	74.00	25.78	35.91	16.66	33.27	---	---	Peak
10	8592.00	45.59	-28.41	74.00	26.70	35.10	18.04	34.25	---	---	Peak
11	11232.00	45.79	-28.21	74.00	20.96	39.10	20.98	35.25	---	---	Peak
12	15156.00	47.24	-26.76	74.00	16.47	41.18	24.69	35.10	---	---	Peak
13	17847.00	48.61	-25.39	74.00	15.38	41.37	27.27	35.41	---	---	Peak





Test Engineer :	Winter Zhao	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Remark :	#6 is system simulator signal which can be ignored.		

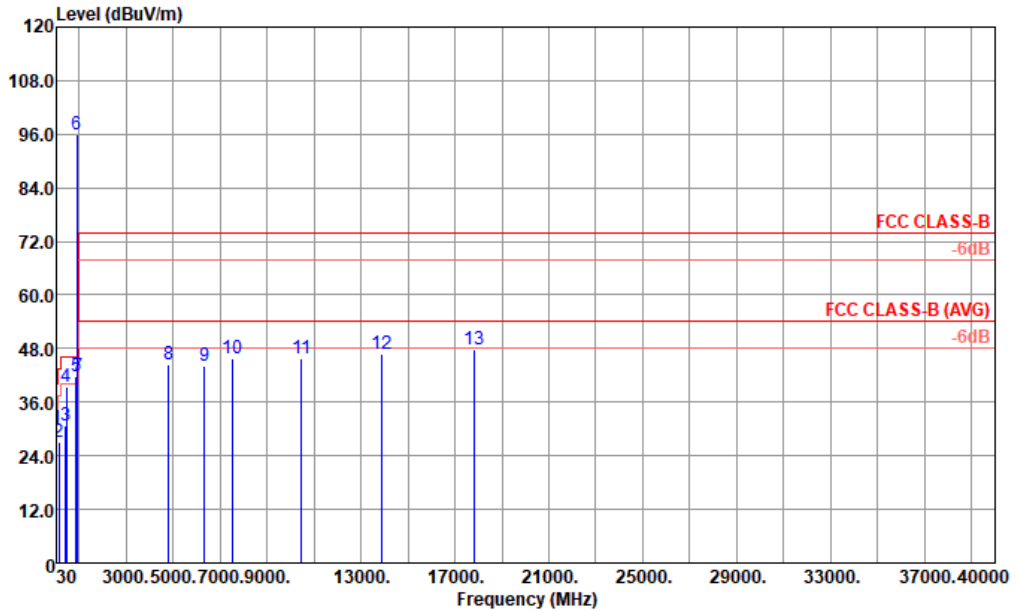

Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m LF 6111D SN44483 VERTICAL  
 Project : (FC)090815

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	45.52	30.01	-9.99	40.00	43.83	16.85	1.53	32.20	---	---	Peak
2	136.70	27.22	-16.28	43.50	39.18	17.53	2.64	32.13	---	---	Peak
3	426.73	30.87	-15.13	46.00	35.91	22.55	4.66	32.25	---	---	Peak
4	452.92	39.53	-6.47	46.00	43.79	23.15	4.80	32.21	---	---	Peak
5	882.63	41.78	-4.22	46.00	38.20	29.17	6.68	32.27	---	---	Peak
6	914.64	95.97			91.72	29.66	6.79	32.20	---	---	Peak
7	946.65	41.78	-4.22	46.00	36.18	30.89	6.91	32.20	200	324	QP
8	4800.00	44.47	-29.53	74.00	27.45	35.66	13.81	32.45	---	---	Peak
9	6352.00	44.20	-29.80	74.00	26.29	34.86	15.46	32.41	---	---	Peak
10	7520.00	45.70	-28.30	74.00	26.34	35.97	16.86	33.47	---	---	Peak
11	10476.00	45.70	-28.30	74.00	22.14	38.55	20.12	35.11	---	---	Peak
12	13914.00	46.94	-27.06	74.00	17.93	40.25	23.91	35.15	---	---	Peak
13	17802.00	47.64	-26.36	74.00	14.44	41.36	27.21	35.37	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



### 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 14, 2020	Nov. 02, 2020	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	Nov. 02, 2020	Oct. 16, 2021	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2020	Nov. 02, 2020	Oct. 27, 2021	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	Nov. 02, 2020	Oct. 16, 2021	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 17, 2020	Nov. 02, 2020	Oct. 16,2021	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct. 17, 2020	Nov. 02, 2020	Oct. 16,2021	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 30, 2019	Nov. 02, 2020	Dec. 29, 2020	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 10, 2019	Nov. 02, 2020	Nov. 09, 2020	Radiation (03CH02-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Nov. 02, 2020	Jan. 07, 2021	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 03, 2020	Nov. 02, 2020	Jan. 02, 2021	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Nov. 02, 2020	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Nov. 02, 2020	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Nov. 02, 2020	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required.



## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.94dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.9dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1dB
---	-------