



FCC RF Test Report

For

Ring LLC

Test Standards:	<u>Part 15C Subpart C §15.247</u>
Product Description:	<u>Transformer</u>
Tested Model:	<u>5AT1S9</u>
Additional Model No.:	<u>N/A</u>
Brand Name:	<u>Ring</u>
FCC ID:	2AEUPBHALV002
ISED:	20271-BHALV002
Classification	(DTS) Digital Transmission System
Report No.:	<u>EC1903011F01</u>
Tested Date:	<u>2019-03-06 to 2019-03-12</u>
Issued Date:	<u>2019-03-12</u>
Prepared By:	 Damon Zhang/ Engineer
Approved By:	 Bacon Wu / RF Manager

Hunan Ecloud Testing Technology Co., Ltd.

Building A1, Changsha E Center, No. 18 Xiangtai Avenue, Liuyang Economic and
Technological Development Zone, Hunan, P.R.C

Tel.: +86-731-89634887 Fax.: +86-731-89634887

www.hn-ecloud.com

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Hunan Ecloud Testing Technology Co., Ltd., the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	2019.03.12	Valid	Original Report

TABLE OF CONTENTS

1. TEST LABORATORY	5
1.1 Test facility	5
2. GENERAL DESCRIPTION.....	6
2.1 Applicant	6
2.2 Manufacturer.....	6
2.3 General Description Of EUT	6
2.4 Modification of EUT	7
2.5 Applicable Standards.....	7
3. TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
3.1 Descriptions of Test Mode	8
3.2 Test Mode.....	9
3.3 Support Equipment.....	10
3.4 Test Setup	10
3.5 Measurement Results Explanation Example.....	12
4. TEST RESULT	错误!未定义书签。
4.1 6dB and 99% Bandwidth Measurement	错误!未定义书签。
4.2 Peak Output Power Measurement	错误!未定义书签。
4.3 Power Spectral Density Measurement	错误!未定义书签。
4.4 Conducted Band Edges and Spurious Emission Measurement	错误!未定义书签。
4.5 Radiated Band Edges and Spurious Emission Measurement	29
4.6 AC Conducted Emission Measurement.....	59
4.7 Antenna Requirements.....	62
5. LIST OF MEASURING EQUIPMENT.....	63
6. UNCERTAINTY OF EVALUATION.....	64
 APPENDIX A. SETUP PHOTOGRAPHS	
 APPENDIX B. EUT EXTERNAL PHOTOGRAPHS	
 APPENDIX C. EUT INTERNAL PHOTOGRAPHS	

Summary of Test RESULT

FCC Rule	IC Rule	Description	Limit	Result	Remark
15.247(a)(2)	RSS-247 5.2(1)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
-	RSS-Gen 6.6	99% Bandwidth	-	Pass	-
15.247(b)(1)	RSS-247 A5.4(4)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
15.247(e)	RSS-247 5.2(2)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
15.247(d)	RSS-247 5.5	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
15.247(d)	RSS-247 5.5	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 5.46 dB at 30.97 MHz
15.207	RSS-Gen 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 19.42 dB at 0.186 MHz
15.203 & 15.247(b)	N/A	Antenna Requirement	N/A	Pass	-

1. Test Laboratory

1.1 Test facility

CNAS (accreditation number: L11138)

Hunan Ecloud Testing Technology Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1244 , Test Firm Registration Number: 793308)

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

ISED(CAB identifier: CN0012)

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the Wireless Device Testing Laboratories list of innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements.

A2LA (Certificate Code: 4895.01)

Hunan Ecloud Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

2. General Description

2.1 Applicant

Ring LLC

1523 26th St, Santa Monica, CA 90404

2.2 Manufacturer

Guangdong Bestek Technology Co., Ltd

No.1, B Road, Longling industrial Zone, YuanCheng District, HeYuan City. China

2.3 General Description Of EUT

Product	Transformer
Model No.	5AT1S9
Additional No.	N/A
Difference Description	N/A
FCC ID	2AEUPBHALV002
IC ID	20271-BHALV002
Power Supply	120Vac
Modulation Technology	BLE/ LoRa
Modulation Type	GFSK/ LoRa 500KHz DTS
Operating Frequency	2402MHz ~ 2480MHz - BLE 902.5MHz ~ 926.5MHz - DTS 903.0MHz ~ 914.2MHz - DTS 923.3MHz ~ 926.9MHz - DTS
Max. Output Power	-0.442 dBm (0.903 mW)
Antenna Type	BLE: PCB Antenna type with -2.5dBi gain Lora: PCB Antenna type with -3.8dBi gain
I/O Ports	Refer to user's manual

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

2.4 Modification of EUT

No modifications are made to the EUT during all test items.

2.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013
- ♦ IC RSS-247 Issue 2
- ♦ IC RSS-Gen Issue 5
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r01

Remark:

1. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, ICES-005 recorded in a separate test report.

3. Test Configuration of Equipment Under Test

3.1 Descriptions of Test Mode

The transmitter has a maximum peak conducted output power as follows:

Channel	Frequency	Mode	Bluetooth RF Output Power
Ch00	2402MHz	GFSK	-1.42
Ch19	2440MHz	GFSK	-0.796
Ch39	2480MHz	GFSK	-0.442

- a. Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

3.2 Test Mode

3.2.1 Antenna Port Conducted Measurement

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.2 – LE GFSK
Conducted Test Cases	Mode 1: CH00_2402 MHz Mode 2: CH19_2440 MHz Mode 3: CH39_2480 MHz

3.2.2 Radiated Emission Test (Below 1GHz)

Radiated Test Cases	Bluetooth 4.2 - LE	
	Transmitting	Mode 1: CH00_2402 MHz Mode 2: CH19_2440 MHz Mode 3: CH39_2480 MHz

- Note : 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture) and packet type.
2. All above modes were tested, but only the worst case test mode 1 was reported .

3.2.3 Radiated Emission Test (Above 1GHz)

Radiated Test Cases	Bluetooth 4.2 - LE	
	Transmitting	Mode 1: CH00_2402 MHz Mode 2: CH19_2440 MHz Mode 3: CH39_2480 MHz

- Note : 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture) and packet type.
2. Following channel(s) was (were) selected for the final test as listed above

3.2.4 Power Line Conducted Emission Test:

AC Conducted Emission	Mode 1 : Bluetooth Link Mode
-----------------------	------------------------------


3.3 Support Equipment

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	E470C	FCC DoC	N/A	shielded cable DC O/P 1.8 m unshielded AC I/P cable 1.2 m
2.	Cement resistance	NA	50W1RJ	N/A	N/A	50W, 1Ω


3.4 Test Setup

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.


Setup diagram for Conducted Test

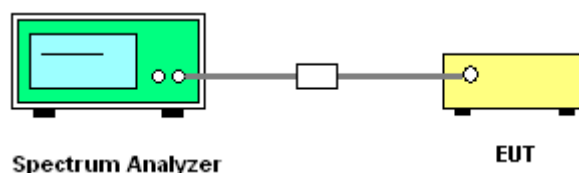


Setup diagram for Raidation(9KHz~30MHz) Test

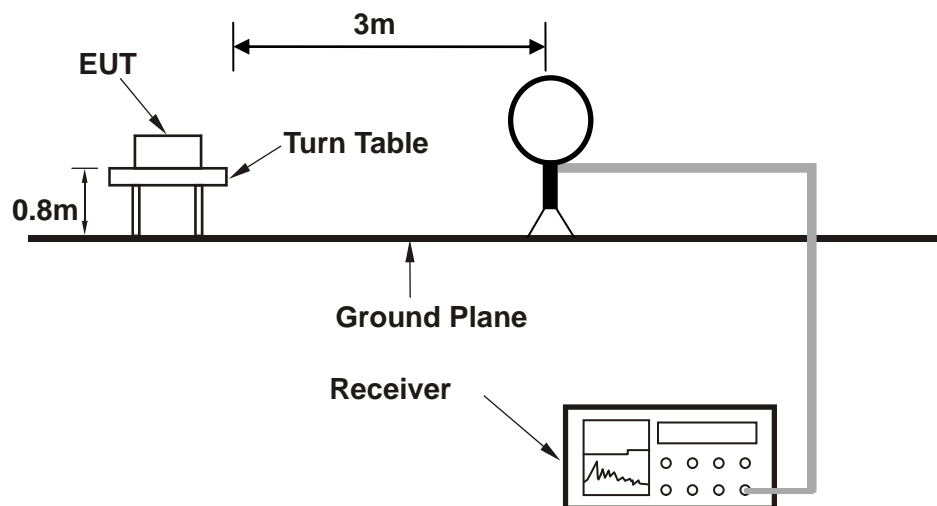


Setup diagram for Raidation(Below 1G) Test

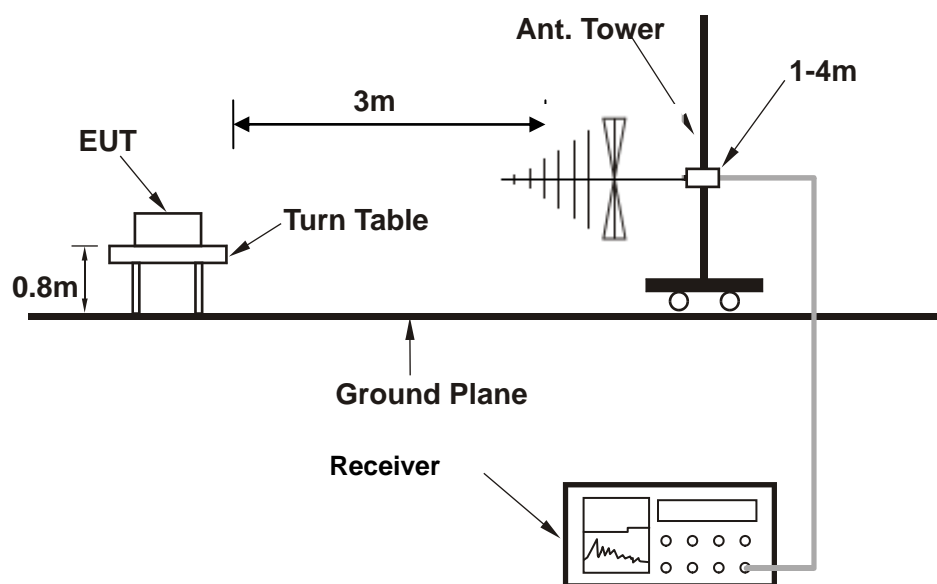

Setup diagram for Raidation(Above1G) Test

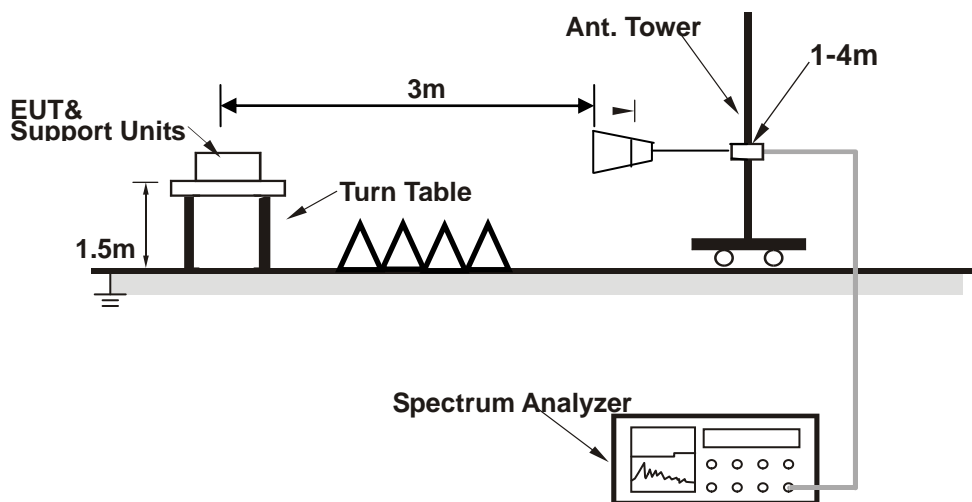

Setup diagram for AC Conducted Emission Test

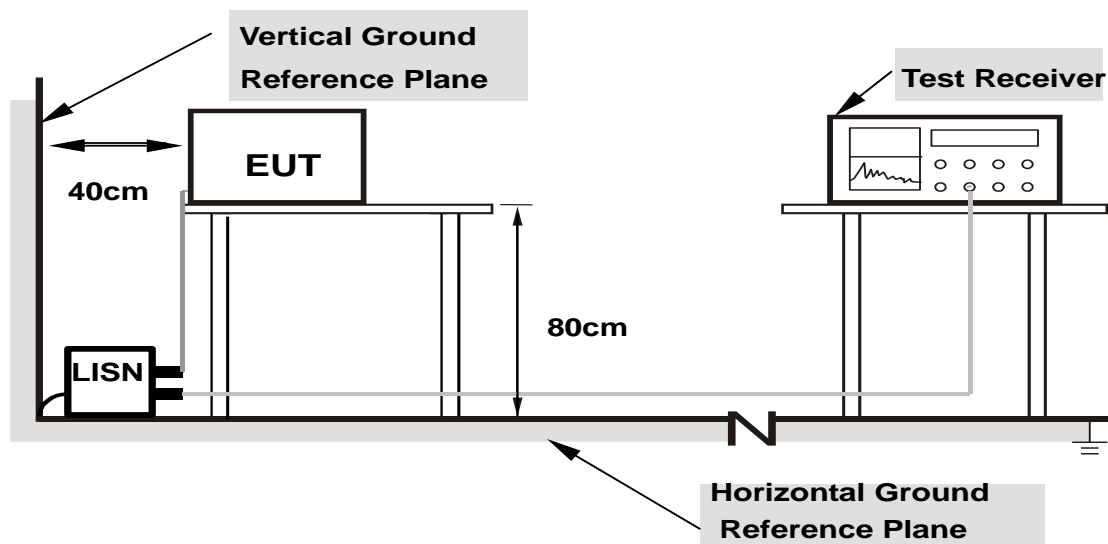

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5 + 10 = 15 \text{ (dB)} \end{aligned}$$

4. Test Result

4.1 6dB and 99% Bandwidth Measurement

4.1.1 Limit of 6dB and 99% Bandwidth

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.


4.1.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set to the maximum power setting and enable the EUT transmit continuously
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.

4.1.3 Test Result of 6dB and 99% Bandwidth

Test Mode :		Transmitting		Temperature :	24~26°C
Test Engineer :		Damon Zhang		Relative Humidity :	50~53%
Data Rate	Modulation	Channel	6dB Bandwidth [MHz]	99% OBW[MHz]	Verdict
1Mbps	GFSK	LCH	0.5436	1.0843	PASS
1Mbps	GFSK	MCH	0.5144	1.0875	PASS
1Mbps	GFSK	HCH	0.5137	1.0856	PASS

6dB and 99% Bandwidth Plot

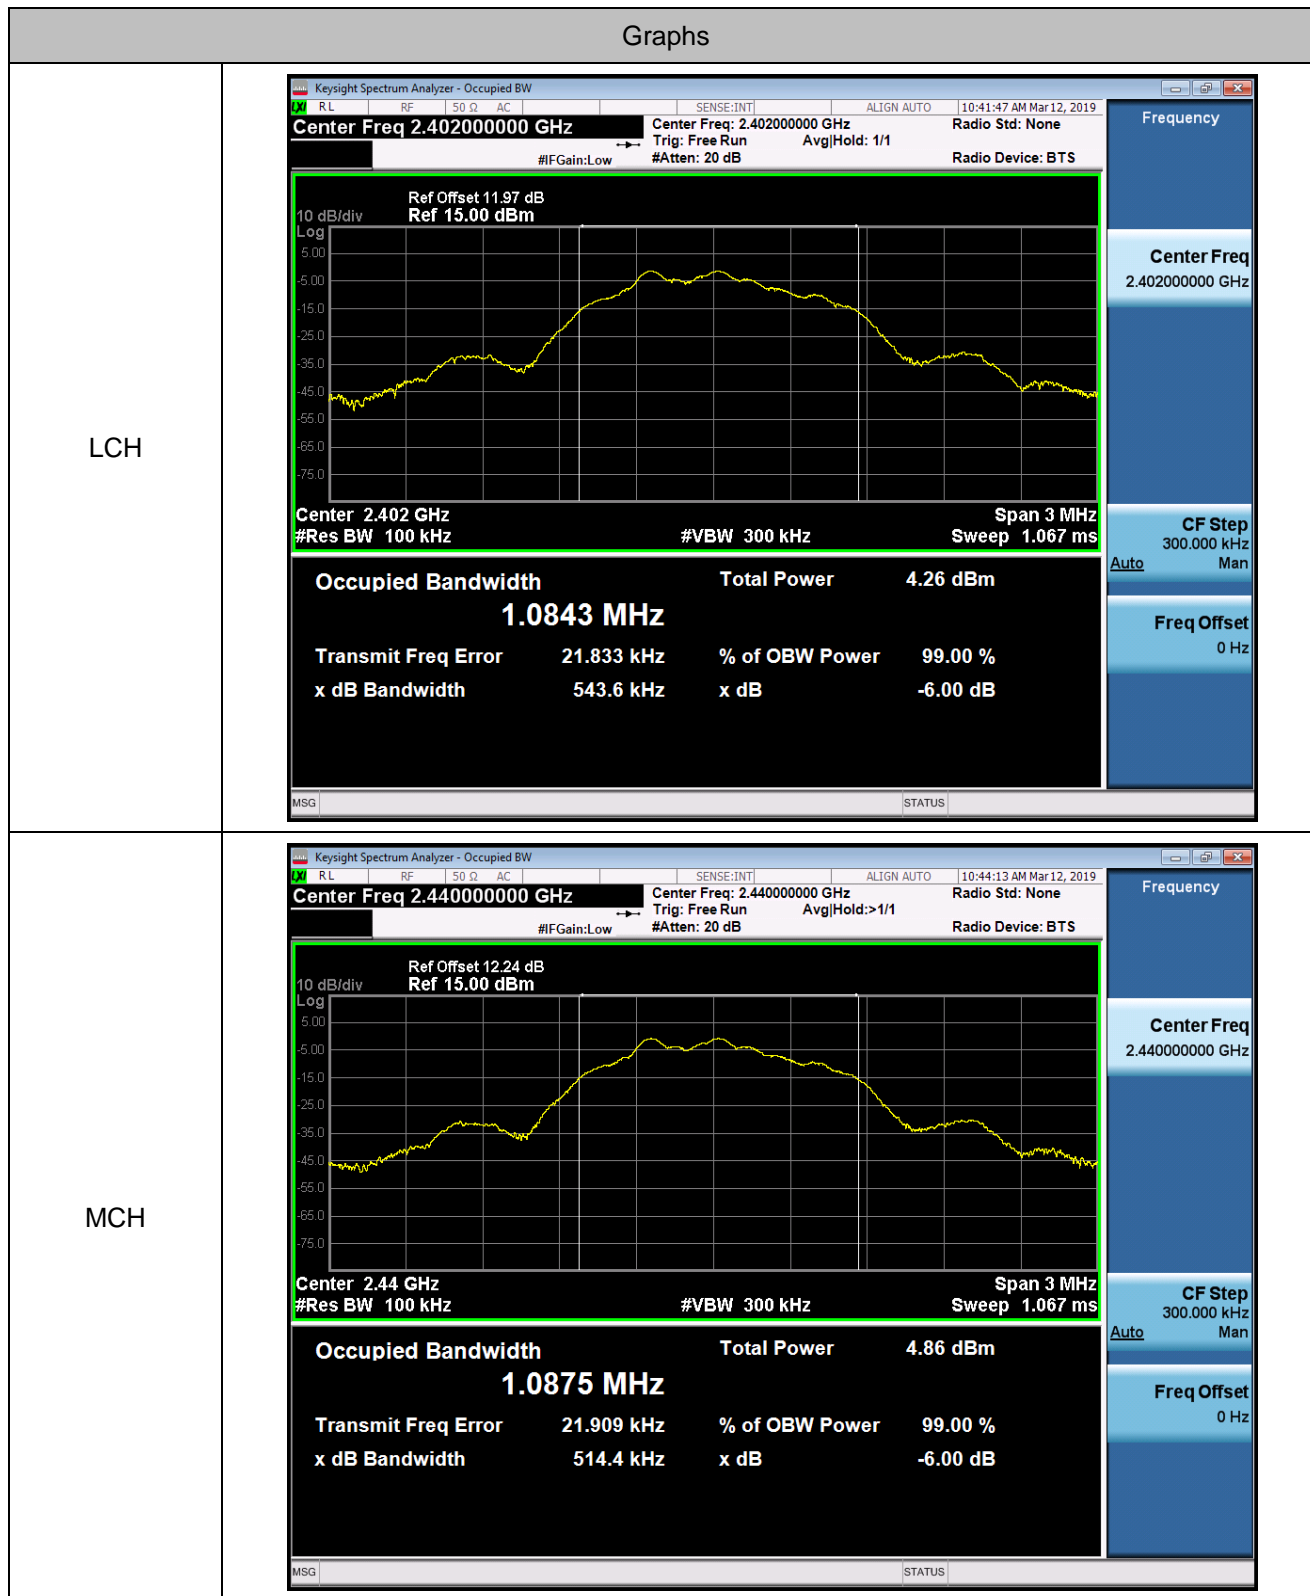

HCH



4.2 Peak Output Power Measurement

4.2.1 Limit of Peak Output Power

FCC §15.247 (b)(3)

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


4.2.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to spectrum analyzer.
3. Set to the maximum power setting and enable the EUT transmit continuously
4. Set the RBW=DTS Bandwidth,VBW \geq 3*RBW,Span \geq 1.5*DTS Bandwidth,Detector=Peak,Sweep time=auto couple,Trace mode=max holde.
5. Allow trace to fully stabilize, Use peak marker function to determine the peak amplitude level.
6. Measure the conducted output power


4.2.3 Test Result of Peak Output Power

Test Mode :		Transmitting	Temperature :	24~26°C
Test Engineer :		Damon Zhang	Relative Humidity :	50~53%
Data Rate	Modulation	Channel	Conduct Peak Power[dBm]	Verdict
1Mbps	GFSK	LCH	-1.42	PASS
1Mbps	GFSK	MCH	-0.796	PASS
1Mbps	GFSK	HCH	-0.442	PASS

Peak Output Power Plot

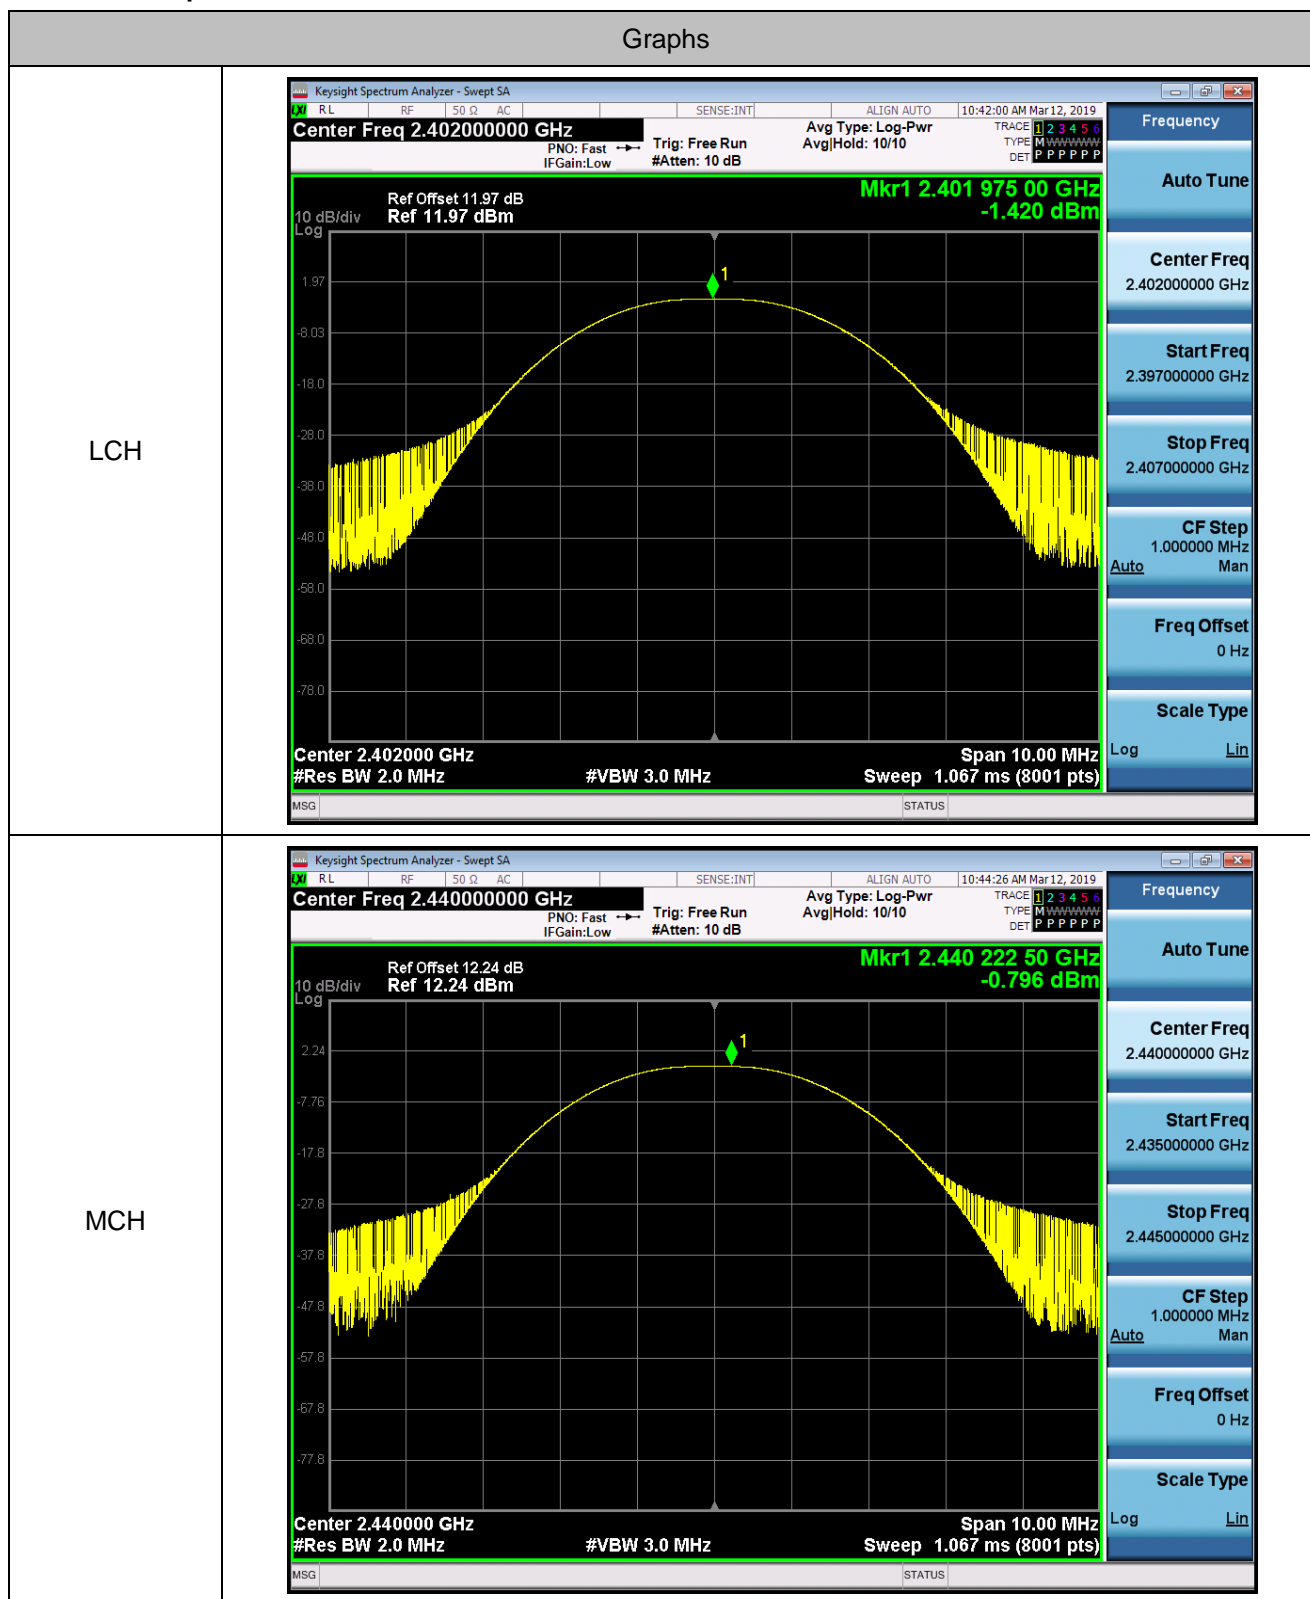

HCH

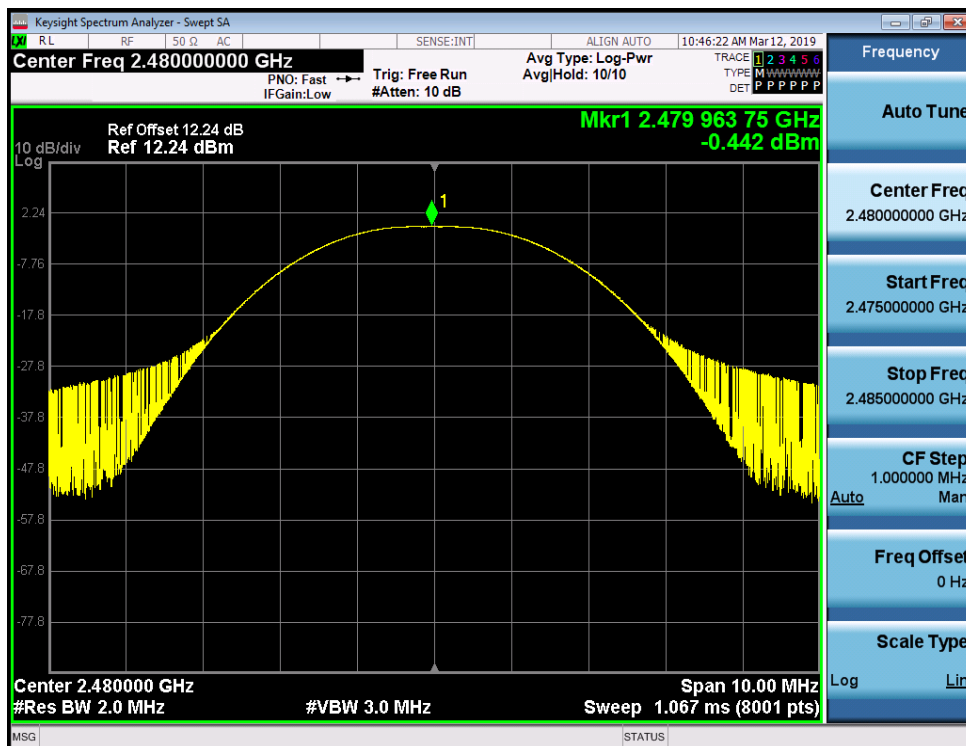

4.3 Power Spectral Density Measurement

4.3.1 Limits of Power Spectral Density

FCC§15.247(e)

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

4.3.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
5. Measure and record the results in the test report.
6. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.


4.3.3 Test Result of Power Spectral Density

Test Mode :		Transmitting	Temperature :	24~26℃
Test Engineer :		Damon Zhang	Relative Humidity :	50~53%
Data Rate	Modulation	Channel	PSD [dBm]	Verdict
1Mbps	GFSK	LCH	-18.137	PASS
1Mbps	GFSK	MCH	-17.487	PASS
1Mbps	GFSK	HCH	-17.134	PASS


Power Spectral Density Plot

Graphs


LCH

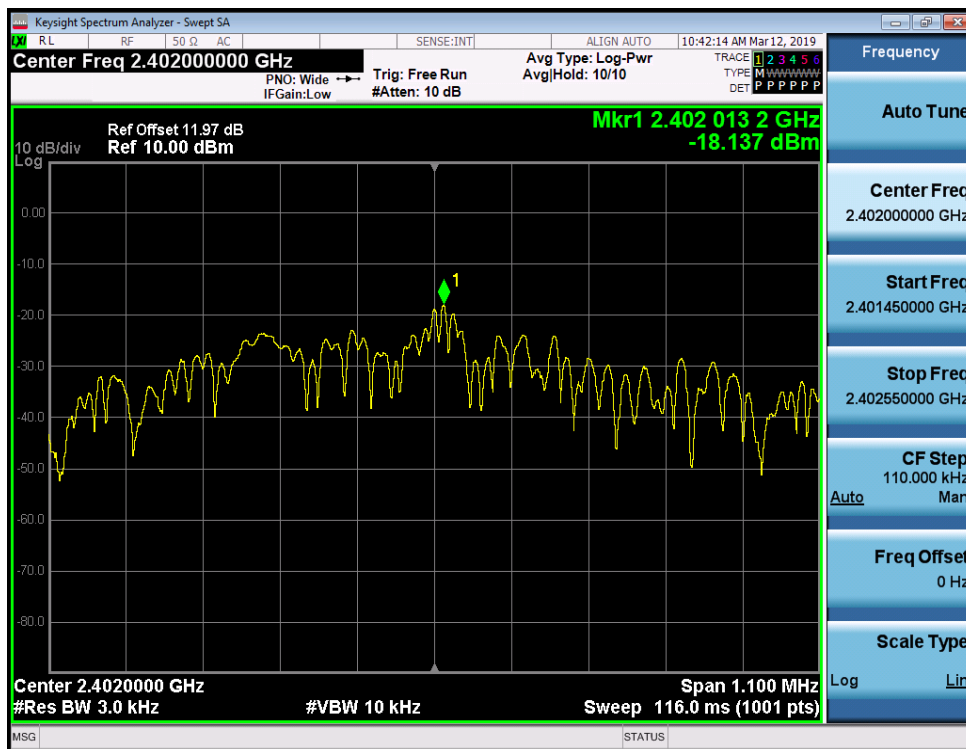

MCH

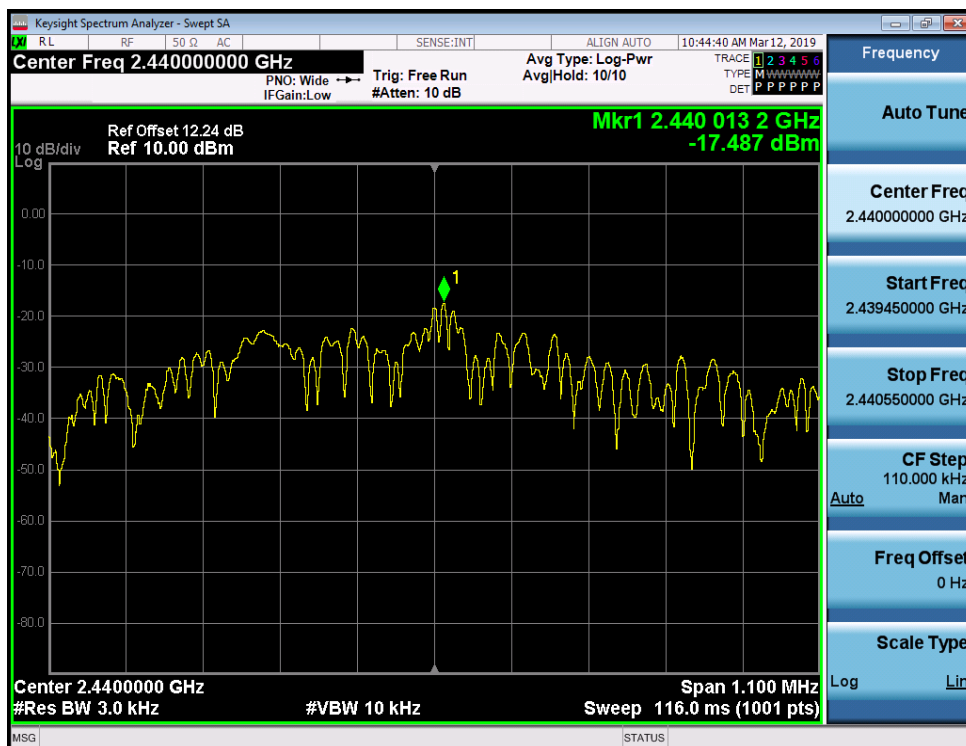

HCH

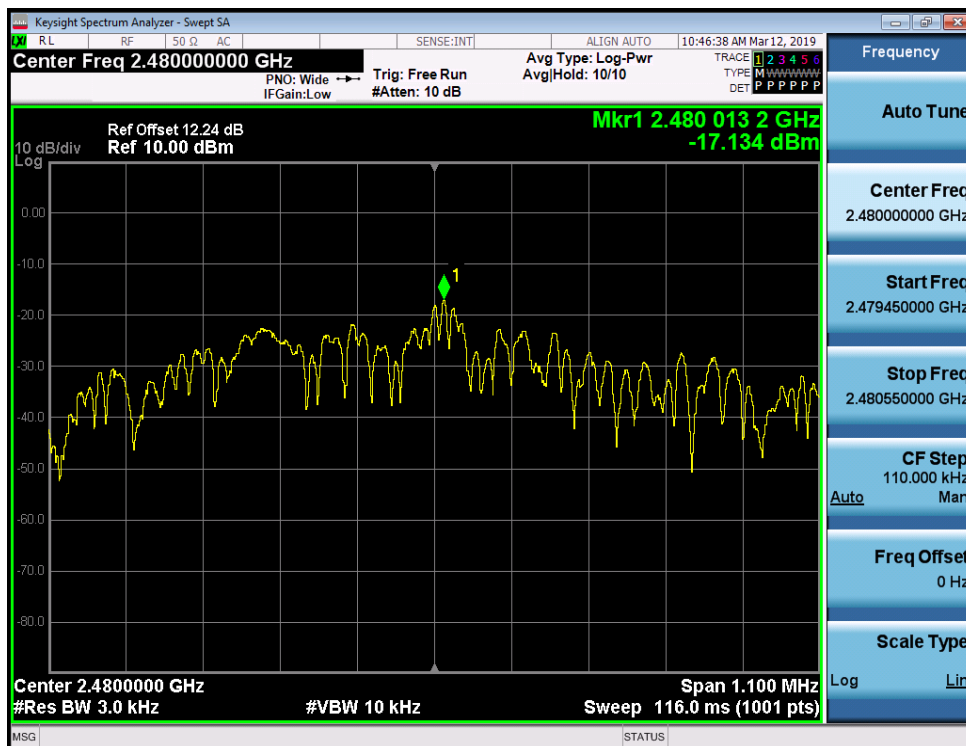

4.4 Conducted Band Edges and Spurious Emission Measurement

4.4.1 Limit of Conducted Band Edges and Spurious Emission

FCC §15.247 (d)

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


4.4.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
4. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


4.4.3 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :		Transmitting		Temperature :	24~26°C
Test Engineer :		Damon Zhang		Relative Humidity :	50~53%
Data Rate	Modulation	Channel	Pref [dBm]	Puw[dBm]	Verdict
1Mbps	GFSK	LCH	-1.469	<Limit	PASS
1Mbps	GFSK	MCH	-0.841	<Limit	PASS
1Mbps	GFSK	HCH	-0.443	<Limit	PASS

Conducted Band Edges and Spurious Emission Plot

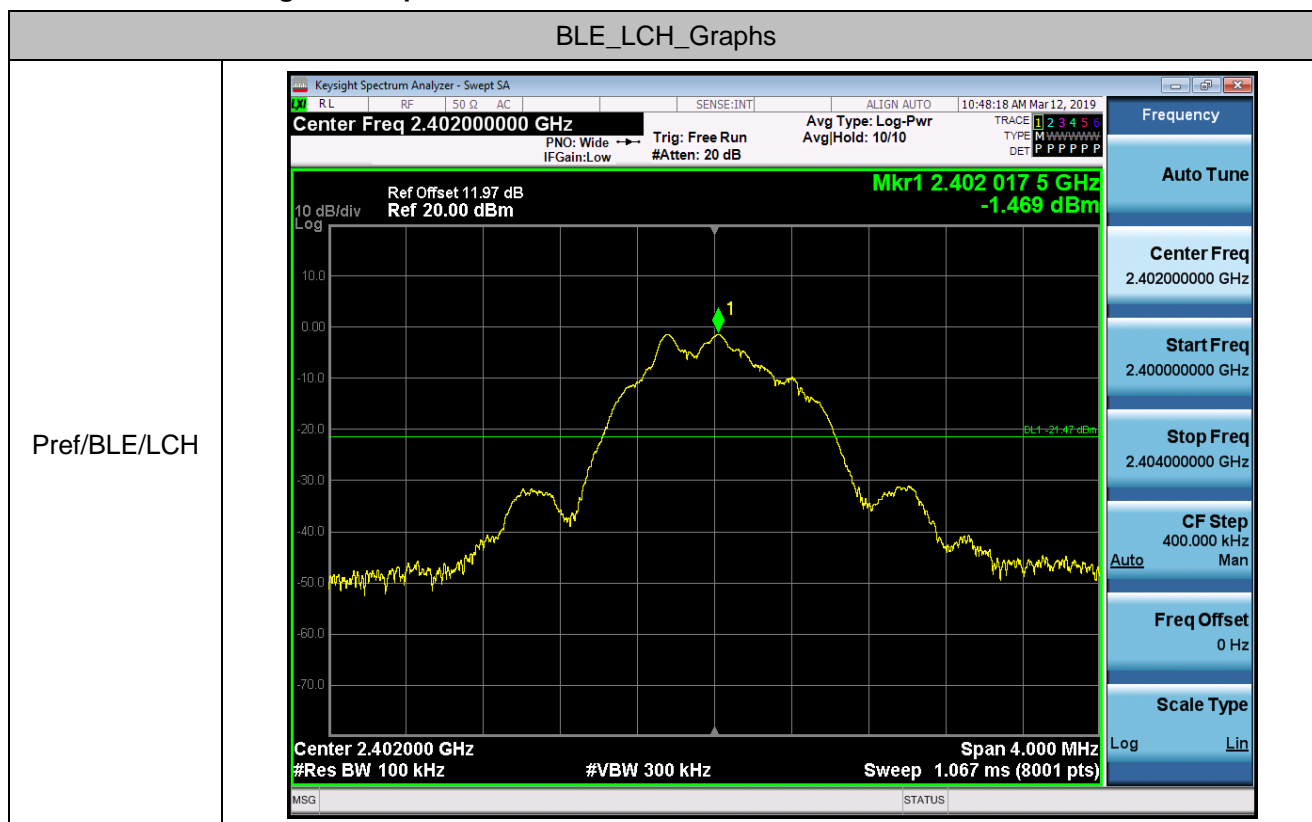

Puw/BLE/LCH

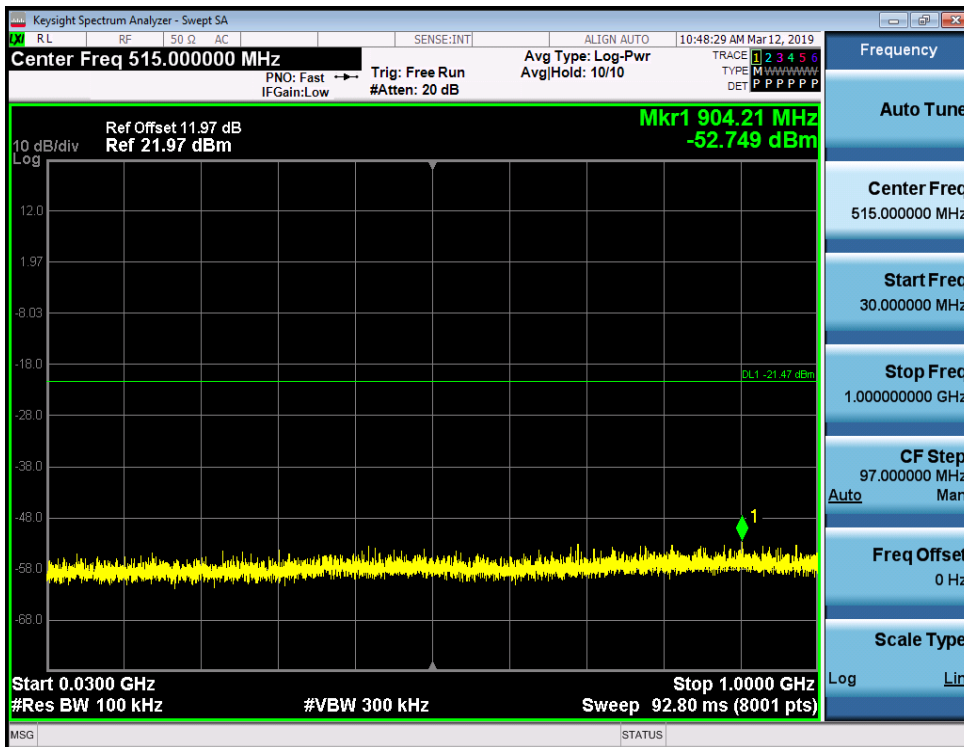



BLE_MCH_Graphs

Pref/BLE/MCH



Puw/BLE/MCH

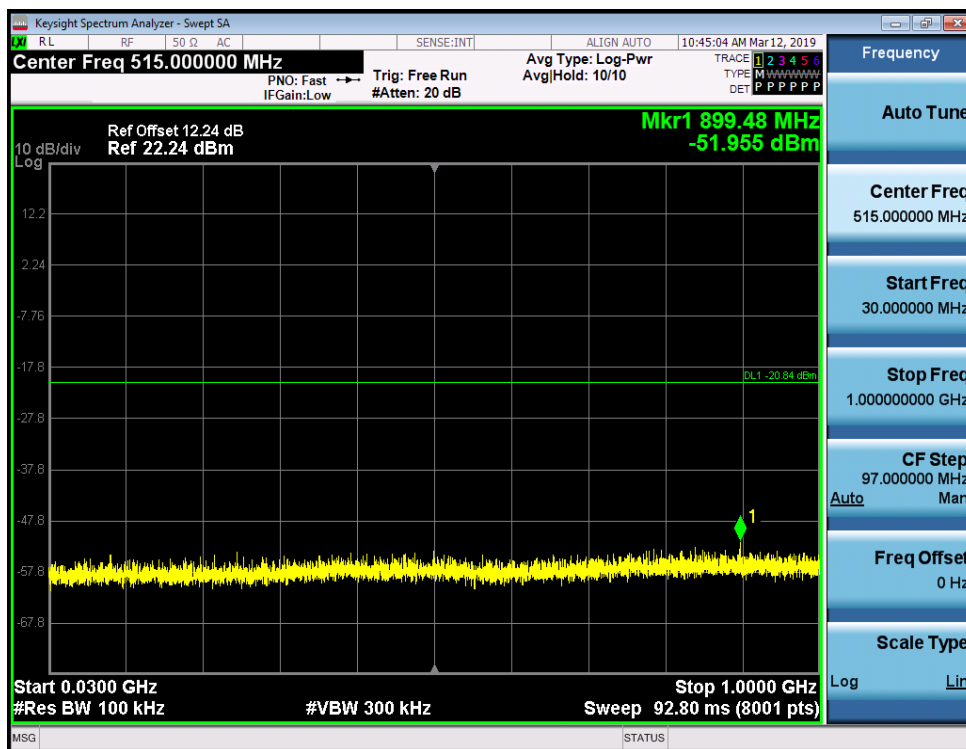

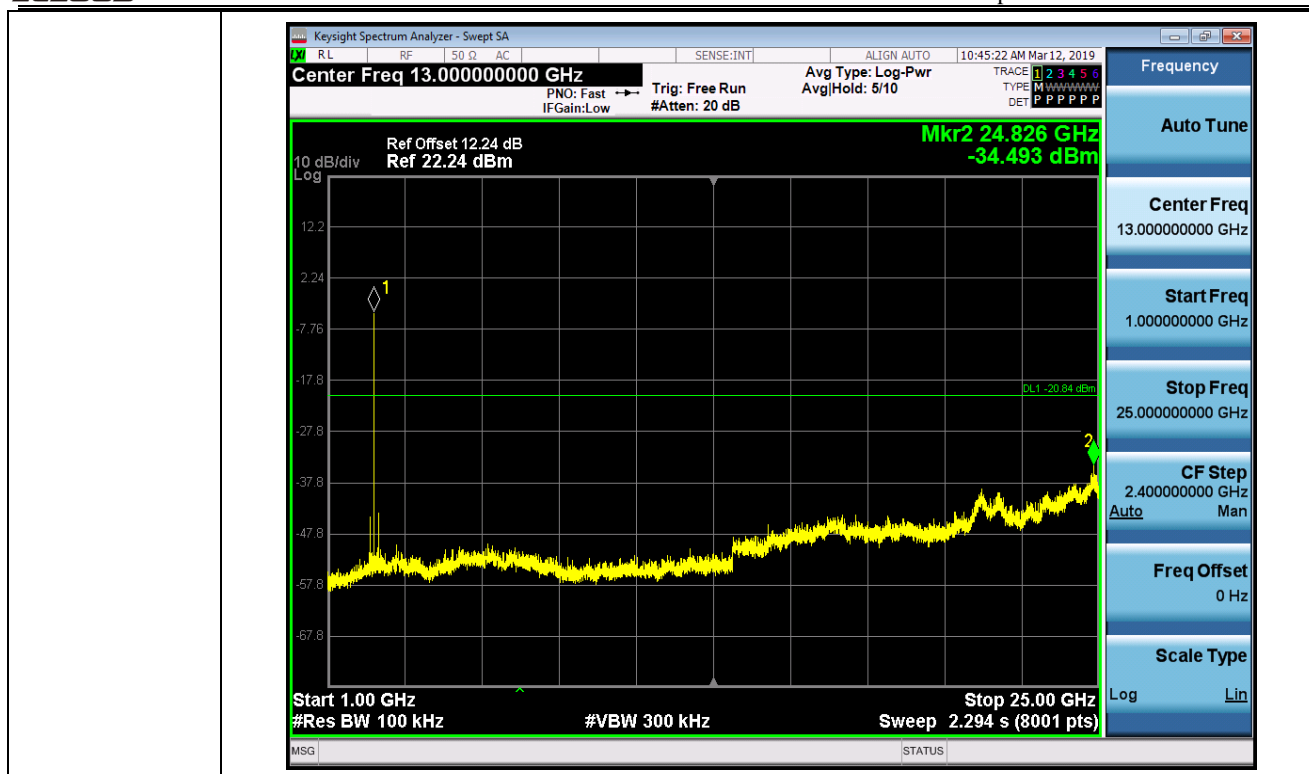



BLE_HCH_Graphs

Pref/BLE/HCH



Puw/BLE/HCH

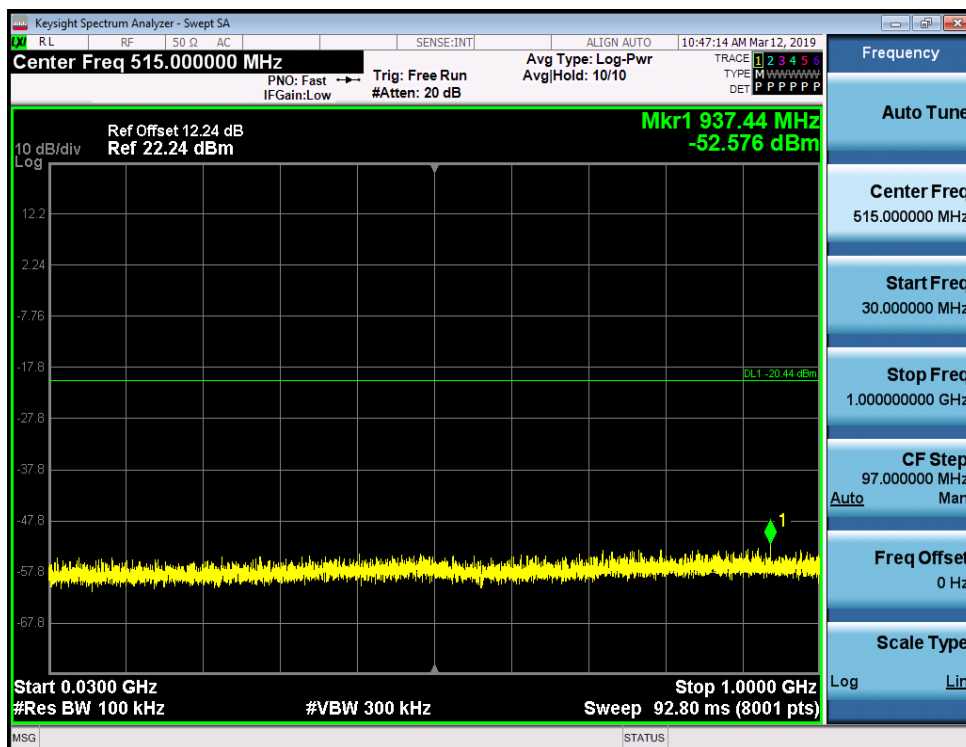

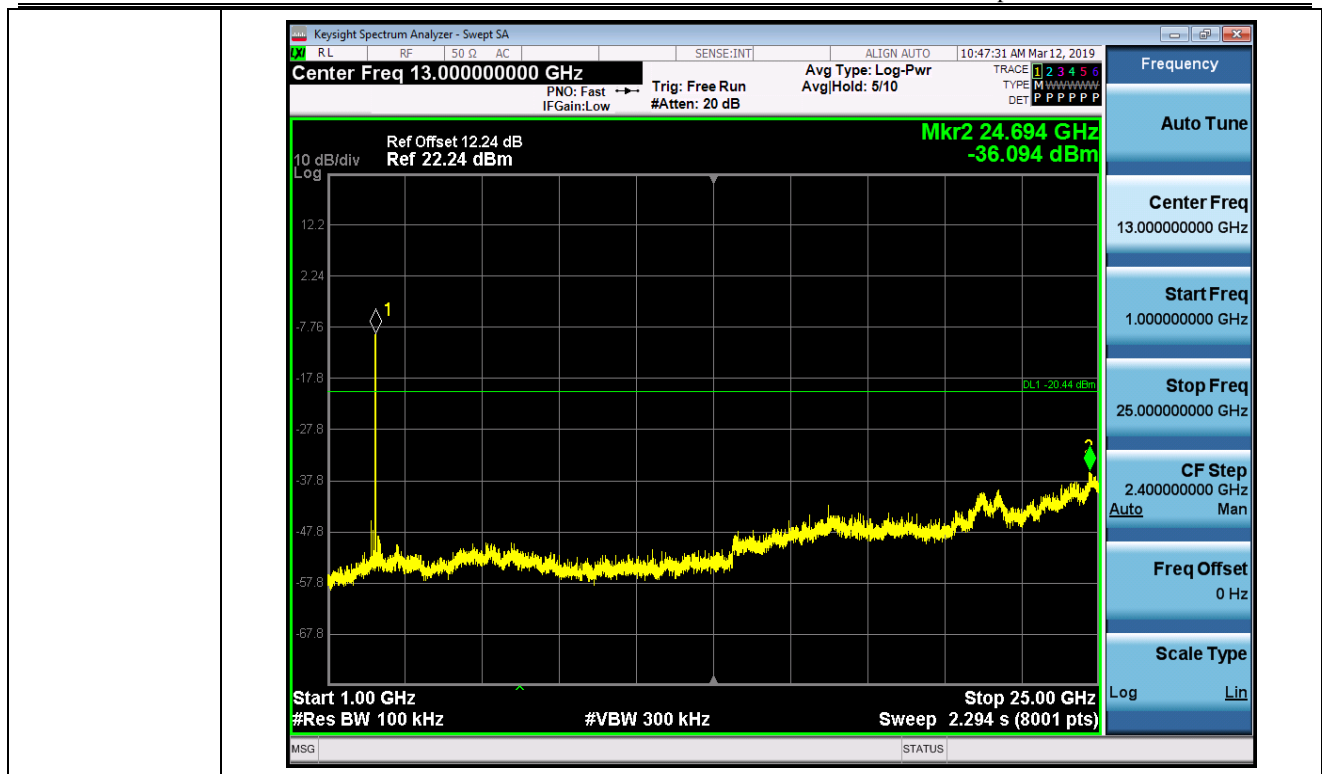

4.5 Radiated Band Edges and Spurious Emission Measurement

4.5.1 Limit of Radiated Band Edges and Spurious Emission

FCC §15.247 (d)

IC RSS-247 5.5


In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The frequency range from 9KHz to 10th harmonic (25GHz) are checked, and no any emissions were found from 18GHz to 25GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.5.2 Test Procedures

6. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
7. The measurement distance is 3 meter.
8. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
9. Set to the maximum power setting and enable the EUT transmit continuously.
10. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement:
VBW = 10 Hz, when duty cycle is no less than 98 percent.
 $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

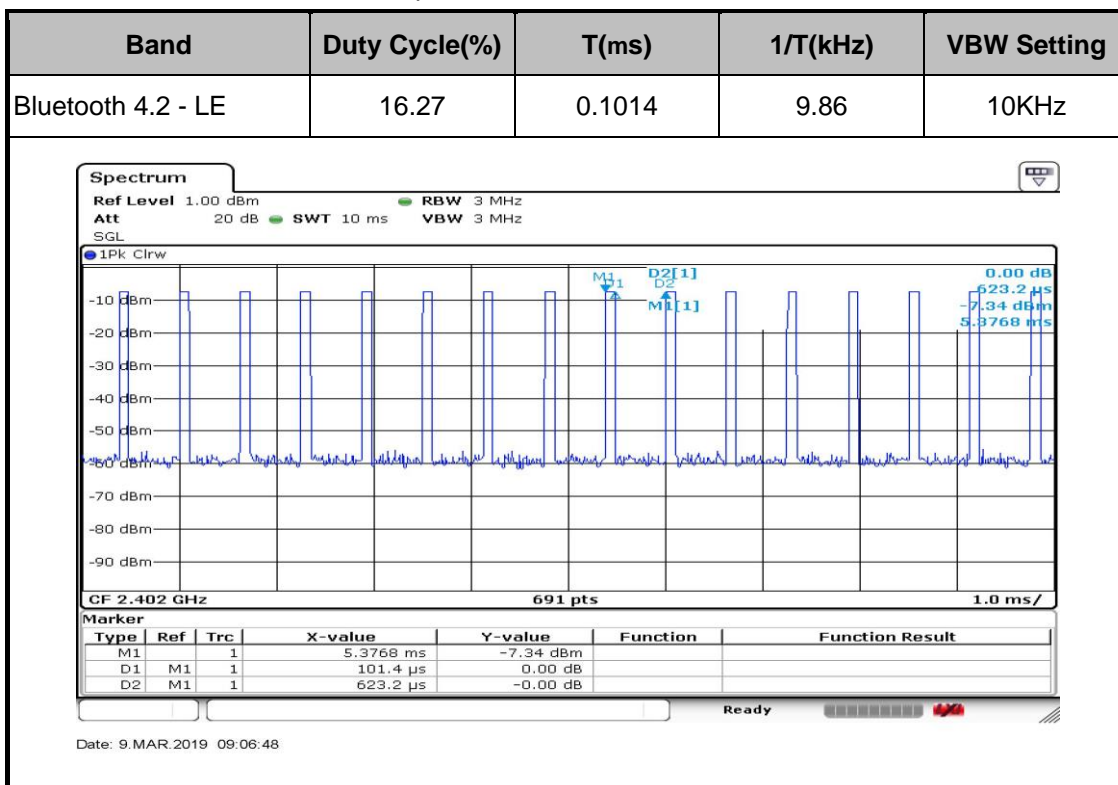

4.5.3 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

4.5.4 Test Result of Radiated Spurious at Band Edges

Low Channel Horizontal:


Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating	: AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: HORIZONTAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

Data: 1 File: F:\data\project\2019\3月\1903011\FCC PART 15C -B.TEM6 (31) Date: 2019-03-10

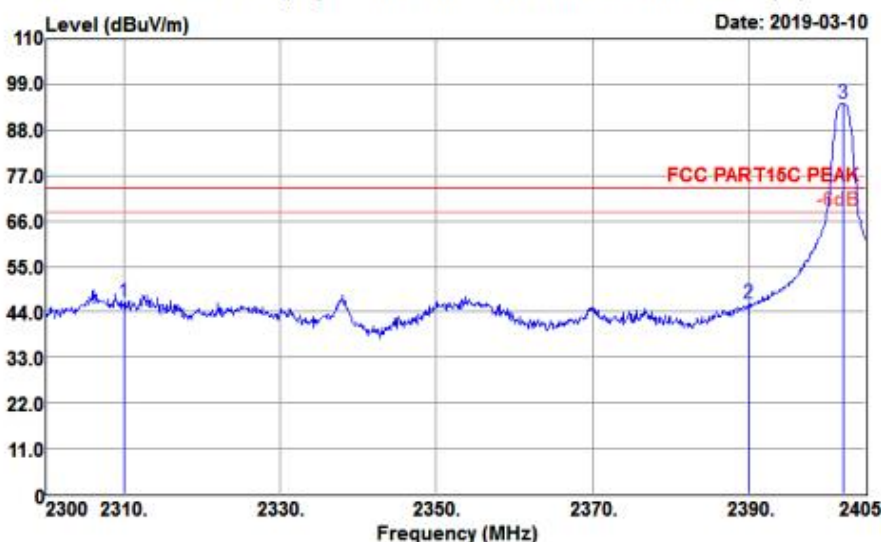

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2310.000	51.82	26.91	3.56	35.87	46.42	74.00	-27.58	Peak	**	**
2390.000	51.50	27.11	3.64	36.08	46.17	74.00	-27.83	Peak	**	**
2402.060	99.74	27.15	3.65	36.11	94.43	74.00	20.43	Peak	**	**


Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: HORIZONTAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

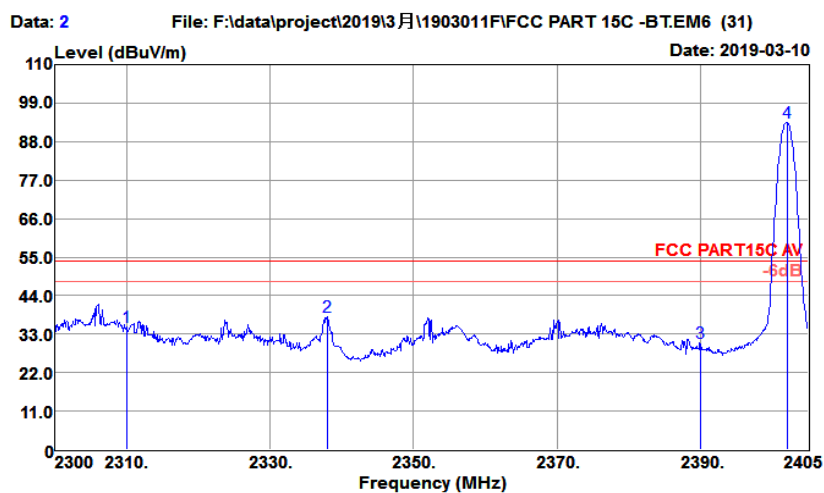

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2310.000	40.47	26.91	3.56	35.87	35.07	54.00	-18.93	Average	353	90
2338.010	43.30	26.98	3.58	35.94	37.92	54.00	-16.08	Average	353	90
2390.000	35.75	27.11	3.64	36.08	30.42	54.00	-23.58	Average	353	90
2402.060	98.88	27.15	3.65	36.11	93.57	54.00	39.57	Average	353	90


Low Channel Vertical:

Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating	: AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: VERTICAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

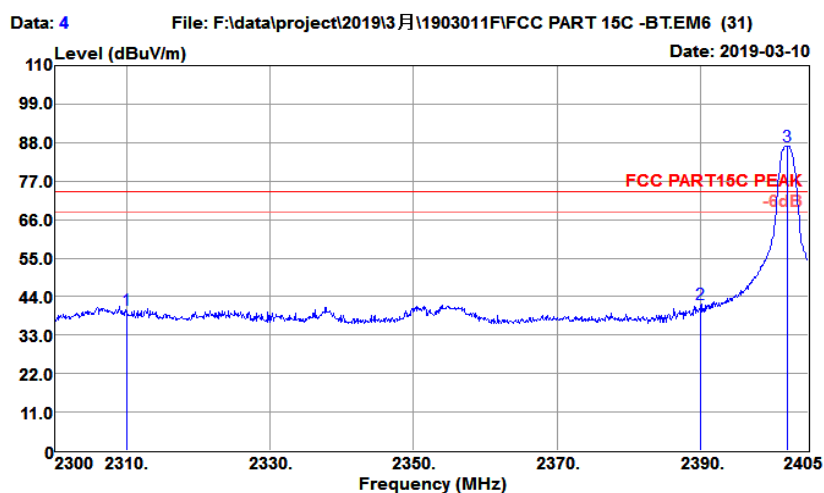

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2310.000	45.57	26.91	3.56	35.87	40.17	74.00	-33.83	Peak	**	**
2390.000	47.08	27.11	3.64	36.08	41.75	74.00	-32.25	Peak	**	**
2402.060	92.35	27.15	3.65	36.11	87.04	74.00	13.04	Peak	**	**


Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: VERTICAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

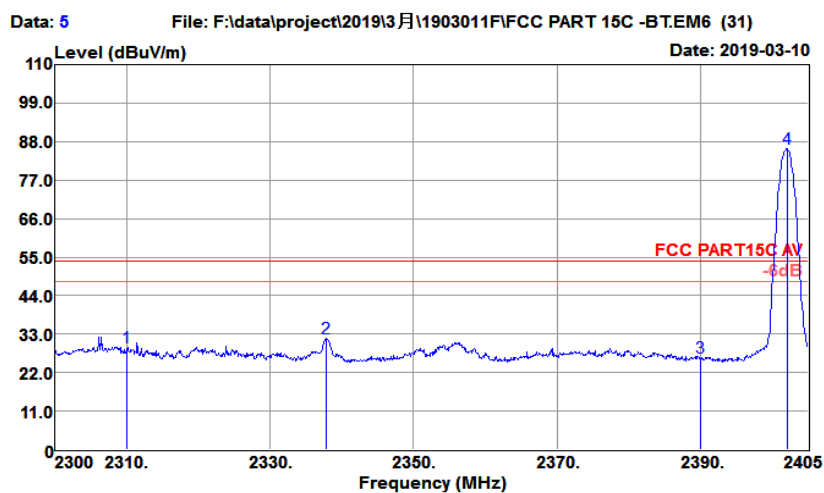

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2310.000	34.63	26.91	3.56	35.87	29.23	54.00	-24.77	Average	225	225
2337.905	37.24	26.98	3.58	35.94	31.86	54.00	-22.14	Average	225	225
2390.000	31.58	27.11	3.64	36.08	26.25	54.00	-27.75	Average	225	225
2402.060	91.23	27.15	3.65	36.11	85.92	54.00	31.92	Average	225	225


High Channel Horizontal:

Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: HORIZONTAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		

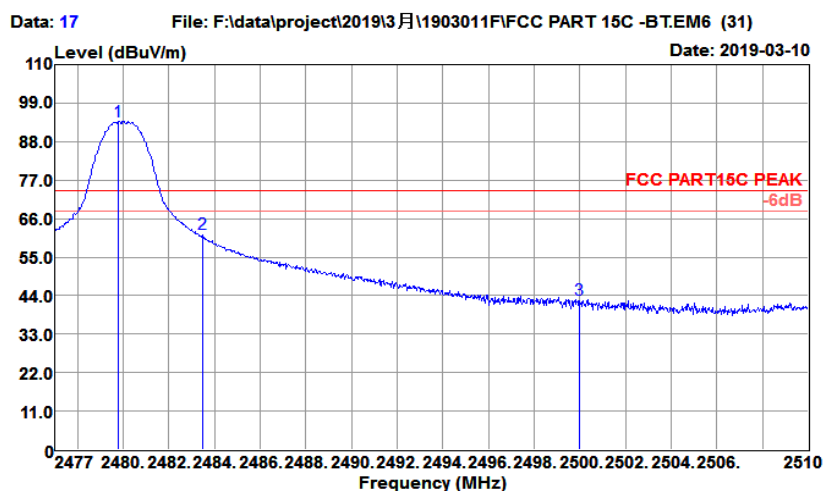

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2479.805	99.00	27.35	3.68	36.32	93.71	74.00	19.71	Peak	**	**
2483.500	67.07	27.36	3.68	36.33	61.78	74.00	-12.22	Peak	**	**
2500.000	48.15	27.40	3.68	36.37	42.86	74.00	-31.14	Peak	**	**


Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: HORIZONTAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		

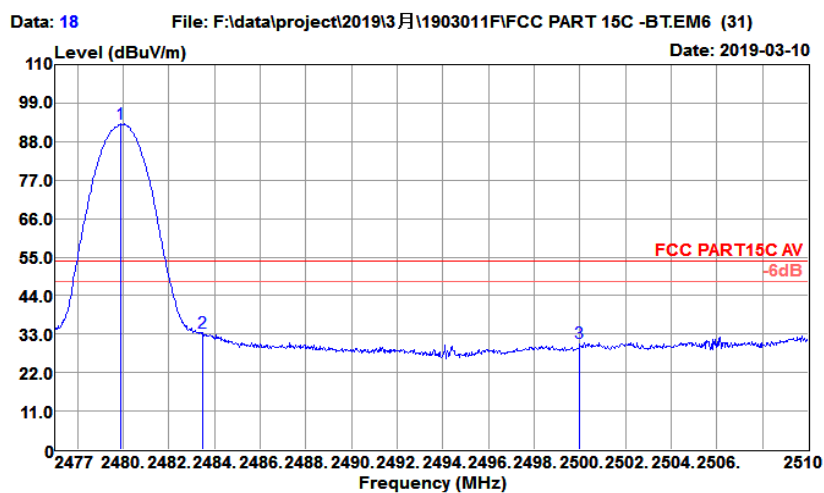

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2479.871	98.29	27.35	3.68	36.32	93.00	54.00	39.00	Average	237	110
2483.500	38.88	27.36	3.68	36.33	33.59	54.00	-20.41	Average	237	110
2500.000	35.77	27.40	3.68	36.37	30.48	54.00	-23.52	Average	237	110


High Channel Vertical:

Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating	: AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: VERTICAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		

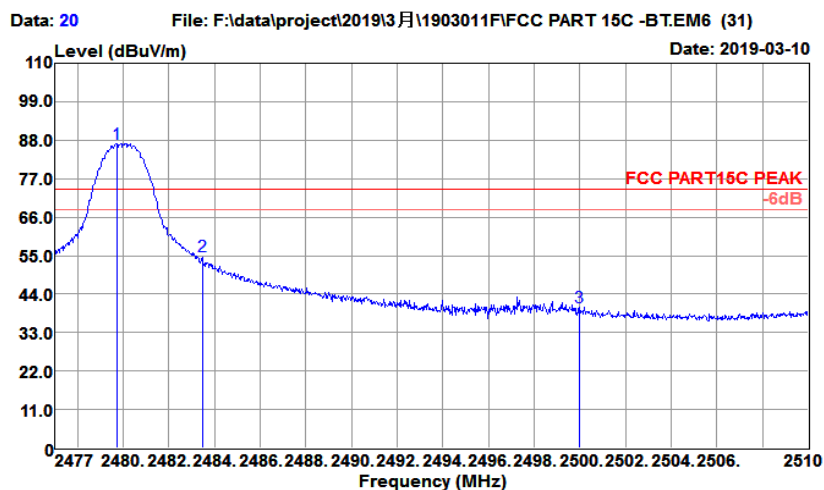

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2479.706	92.29	27.35	3.68	36.32	87.00	74.00	13.00	Peak	**	**
2483.500	60.00	27.36	3.68	36.33	54.71	74.00	-19.29	Peak	**	**
2500.000	45.58	27.40	3.68	36.37	40.29	74.00	-33.71	Peak	**	**

Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating	: AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: VERTICAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		

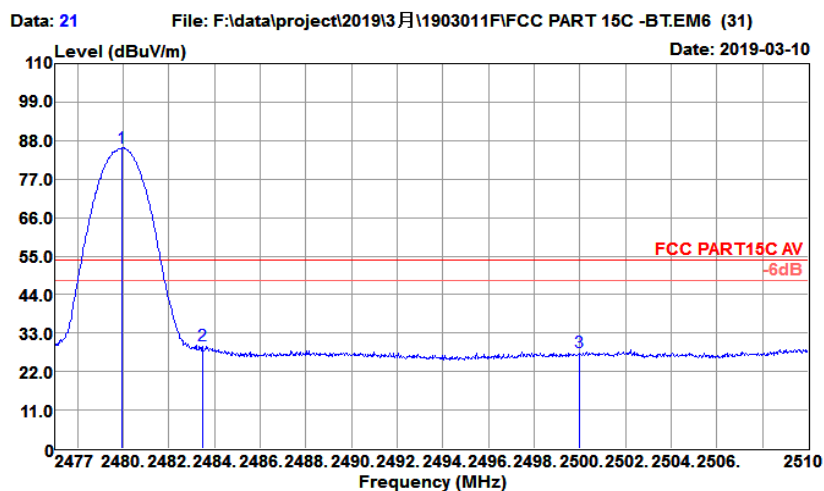


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2479.970	91.19	27.35	3.68	36.32	85.90	54.00	31.90	Average	204	241
2483.500	34.84	27.36	3.68	36.33	29.55	54.00	-24.45	Average	204	241
2500.000	32.99	27.40	3.68	36.37	27.70	54.00	-26.30	Average	204	241

4.5.5 Test Result of Radiated Spurious Emission (1GHz ~ 10th Harmonic)


Low Channel Horizontal:

Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating	: AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: HORIZONTAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

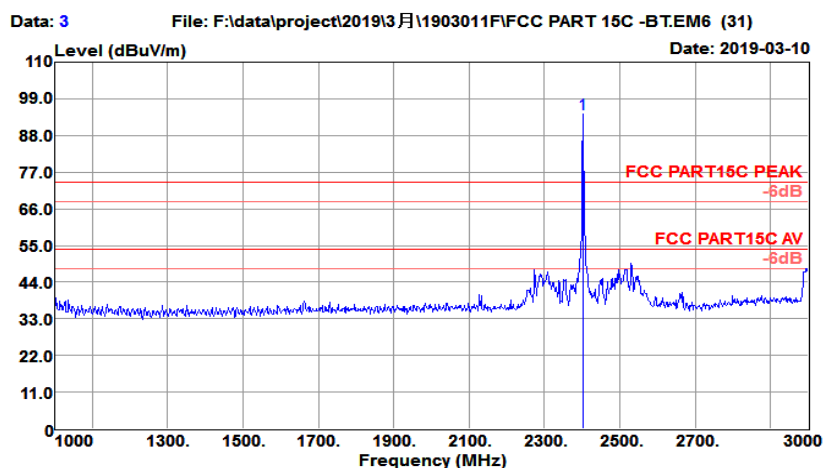


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2402.000	99.76	27.15	3.65	36.11	94.45	74.00	20.45	Peak	**	**

Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: HORIZONTAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

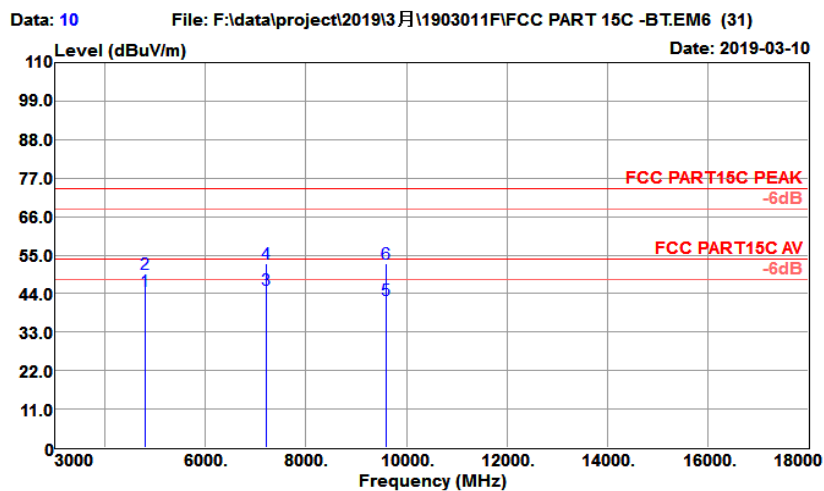


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
4804.000	44.38	31.23	5.45	36.27	44.79	54.00	-9.21	Average	186	333
4804.000	49.24	31.23	5.45	36.27	49.65	74.00	-24.35	Peak	186	333
7206.000	36.45	35.87	6.94	34.25	45.01	54.00	-8.99	Average	185	331
7206.000	43.96	35.87	6.94	34.25	52.52	74.00	-21.48	Peak	185	331
9608.000	30.81	37.79	7.77	34.13	42.24	54.00	-11.76	Average	185	275
9608.000	41.17	37.79	7.77	34.13	52.60	74.00	-21.40	Peak	185	275

Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating	: AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: HORIZONTAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

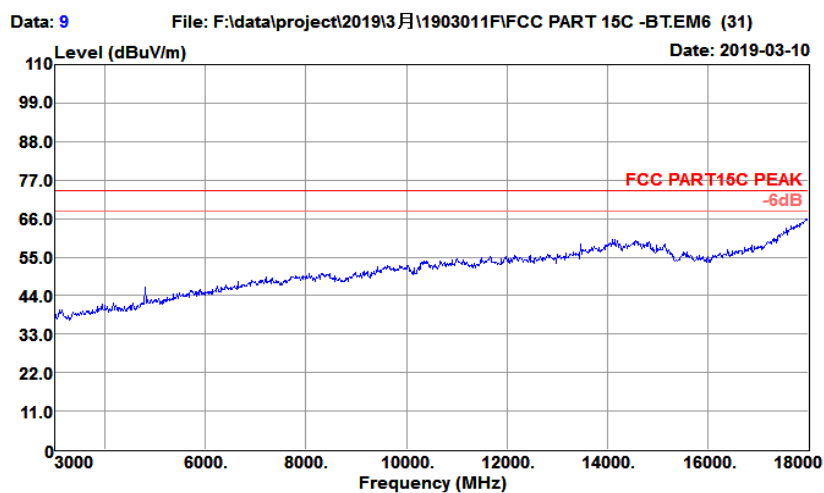


Low Channel Vertical:

Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: VERTICAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

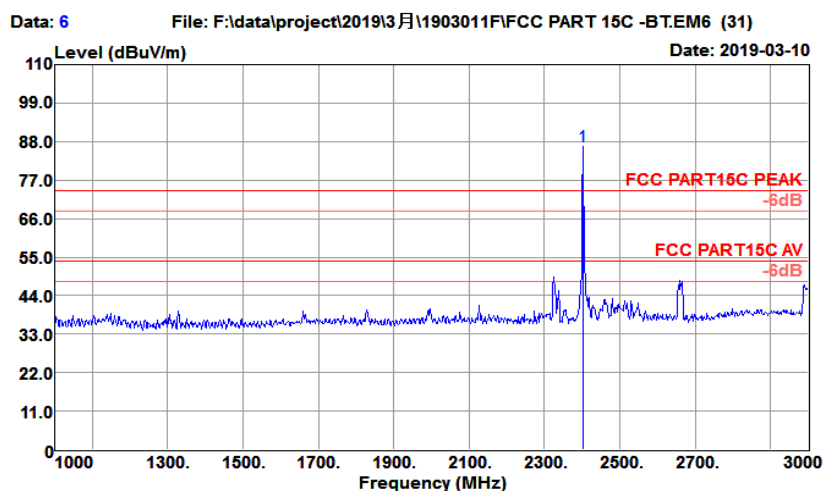


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2402.000	91.88	27.15	3.65	36.11	86.57	74.00	12.57	Peak	**	**

Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: VERTICAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

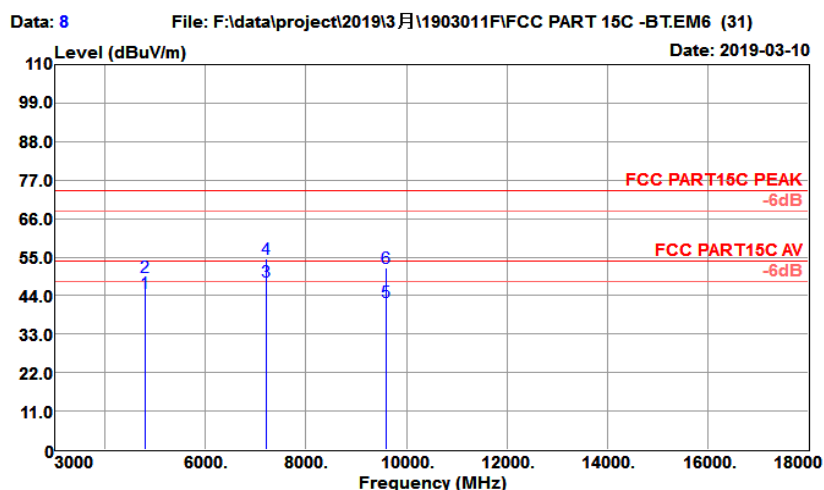


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
4804.000	44.28	31.23	5.45	36.27	44.69	54.00	-9.31	Average	285	311
4804.000	48.85	31.23	5.45	36.27	49.26	74.00	-24.74	Peak	285	311
7206.000	39.47	35.87	6.94	34.25	48.03	54.00	-5.97	Average	256	326
7206.000	46.11	35.87	6.94	34.25	54.67	74.00	-19.33	Peak	256	326
9608.000	30.86	37.79	7.77	34.13	42.29	54.00	-11.71	Average	258	323
9608.000	40.64	37.79	7.77	34.13	52.07	74.00	-21.93	Peak	258	323

Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: VERTICAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

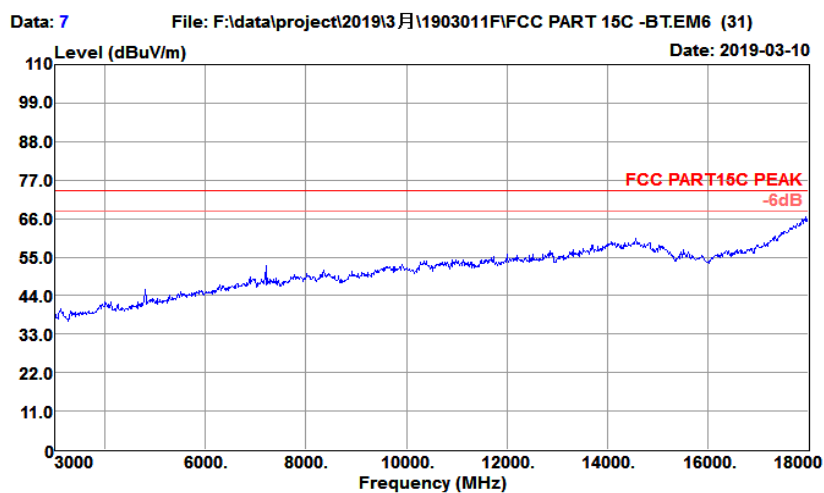


Middle Channel Horizontal:

Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: HORIZONTAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH19(2440MHz)		

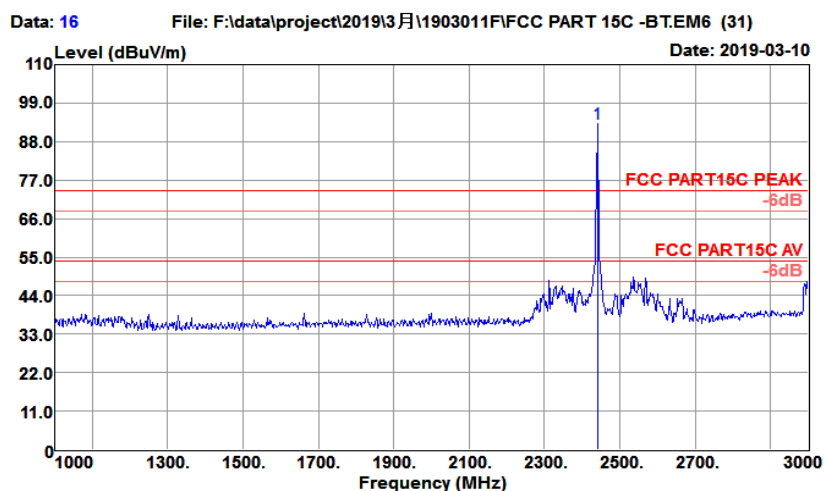


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2440.000	98.52	27.24	3.66	36.21	93.21	74.00	19.21	Peak	**	**

Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: HORIZONTAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH19(2440MHz)		

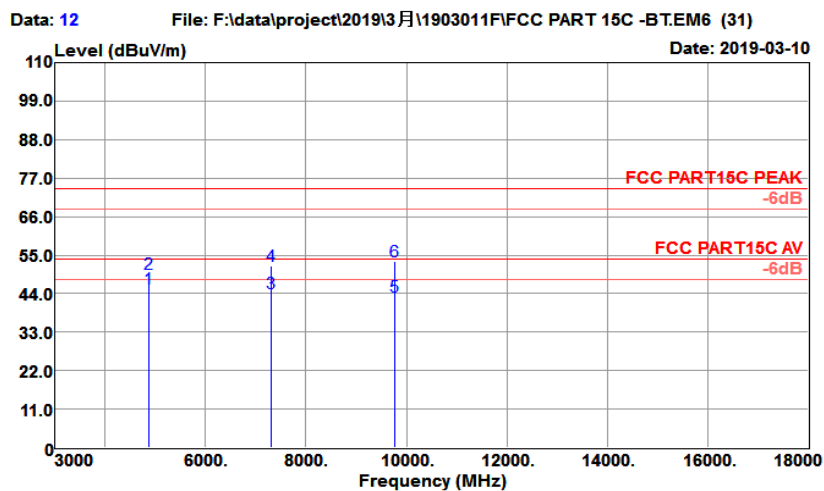

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
4880.000	44.95	31.41	5.41	36.24	45.53	54.00	-8.47	Average	276	308
4880.000	49.09	31.41	5.41	36.24	49.67	74.00	-24.33	Peak	276	308
7320.000	35.10	36.14	7.27	34.35	44.16	54.00	-9.84	Average	169	317
7320.000	42.96	36.14	7.27	34.35	52.02	74.00	-21.98	Peak	169	317
9760.000	31.28	38.07	7.98	34.19	43.14	54.00	-10.86	Average	169	332
9760.000	41.52	38.07	7.98	34.19	53.38	74.00	-20.62	Peak	169	332

Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: HORIZONTAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH19(2440MHz)		

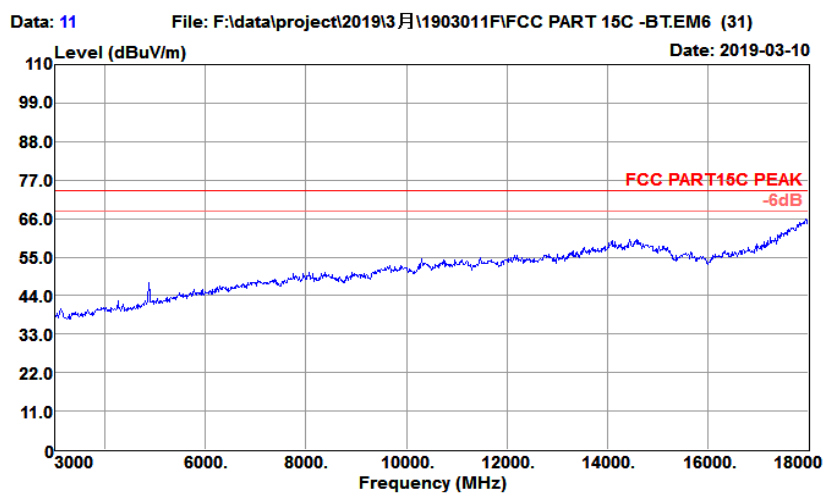


Middle Channel Vertical:

Building A1, Changsha E Center, No. 18 Xiangtai Avenue,
Liuyang Economic and Technological Development Zone, Hunan, P.R.C
FCC ID : 2AEUPBHALV002
IC ID: 20271-BHALV002
www.hn-ecloud.com

Tel.: +86-731-89634887
Fax.: +86-731-89634887


Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: VERTICAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH19(2440MHz)		

Data: 15 File: F:\data\project\2019\3月\1903011F\FCC PART 15C -B.EM6 (31)

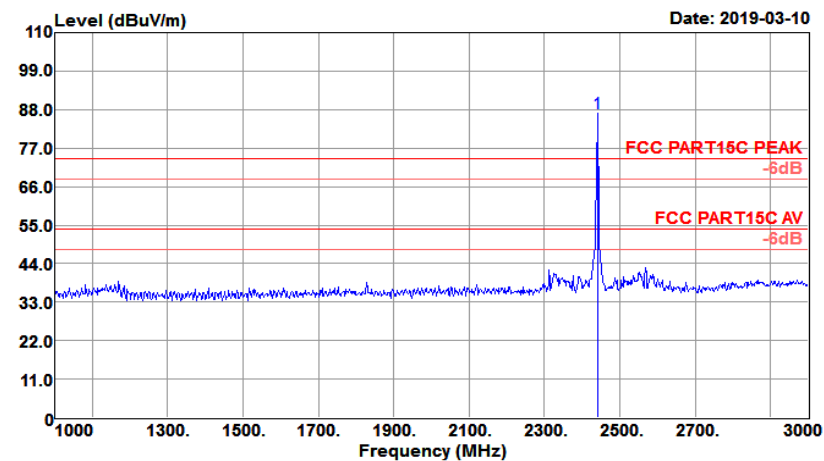


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2440.000	92.38	27.24	3.66	36.21	87.07	74.00	13.07	Peak	**	**

Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: VERTICAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH19(2440MHz)		

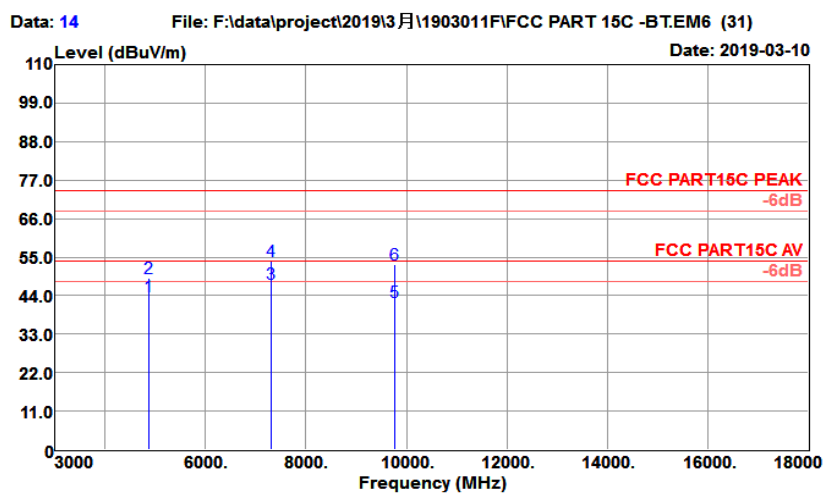

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
4880.000	43.18	31.41	5.41	36.24	43.76	54.00	-10.24	Average	225	300
4880.000	48.53	31.41	5.41	36.24	49.11	74.00	-24.89	Peak	225	300
7320.000	38.29	36.14	7.27	34.35	47.35	54.00	-6.65	Average	226	329
7320.000	44.84	36.14	7.27	34.35	53.90	74.00	-20.10	Peak	226	329
9760.000	30.26	38.07	7.98	34.19	42.12	54.00	-11.88	Average	256	258
9760.000	40.98	38.07	7.98	34.19	52.84	74.00	-21.16	Peak	256	258

Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: VERTICAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH19(2440MHz)		

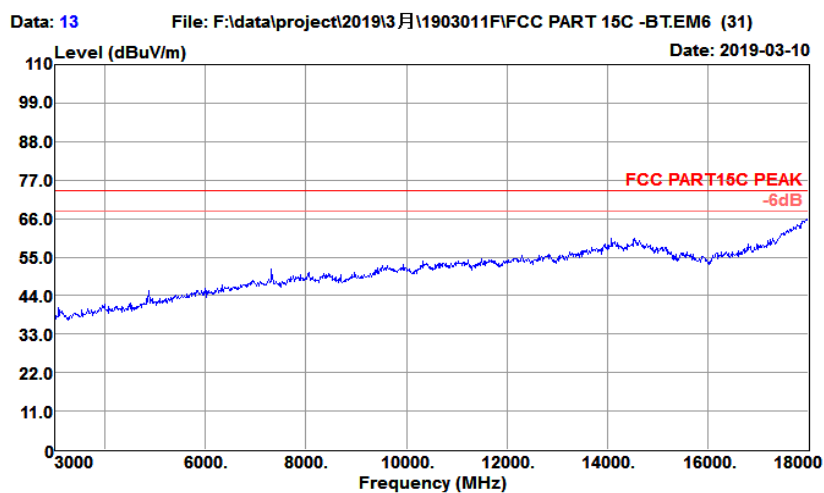


High Channel Horizontal:

Building A1, Changsha E Center, No. 18 Xiangtai Avenue,
Liuyang Economic and Technological Development Zone, Hunan, P.R.C
FCC ID : 2AEUPBHALV002
IC ID: 20271-BHALV002
www.hn-ecloud.com

Tel.: +86-731-89634887
Fax.: +86-731-89634887

Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: HORIZONTAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		


Data: 19 File: F:\data\project\2019\3月\1903011F\FCC PART 15C -B.EM6 (31) Date: 2019-03-10

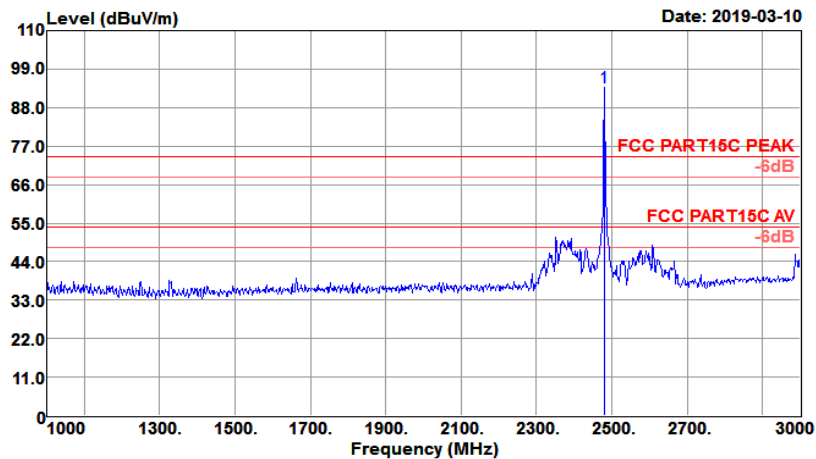

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2480.000	98.95	27.35	3.68	36.32	93.66	74.00	19.66	Peak	**	**


Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: HORIZONTAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		

Data: 26 File: F:\data\project\2019\3月\1903011F\FCC PART 15C -BTEM6 (31)

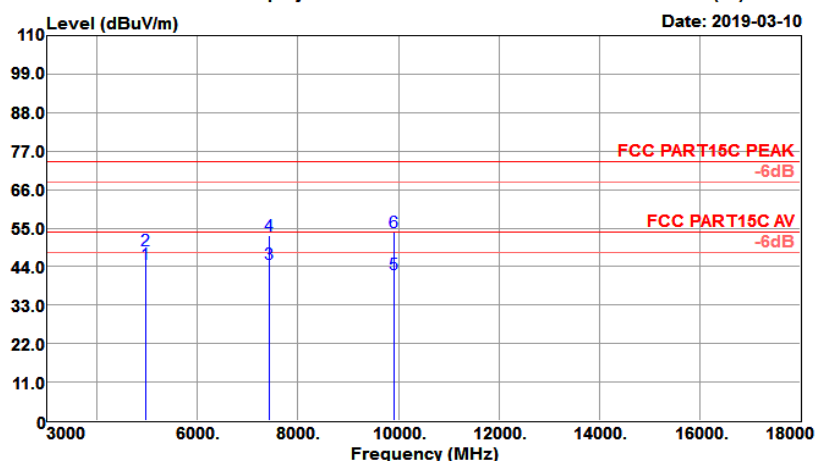

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
4960.000	44.03	31.60	5.36	36.21	44.78	54.00	-9.22	Average	252	300
4960.000	48.04	31.60	5.36	36.21	48.79	74.00	-25.21	Peak	252	300
7440.000	35.53	36.41	7.44	34.47	44.91	54.00	-9.09	Average	230	314
7440.000	43.50	36.41	7.44	34.47	52.88	74.00	-21.12	Peak	230	314
9920.000	29.79	38.36	8.05	34.26	41.94	54.00	-12.06	Average	232	259
9920.000	41.71	38.36	8.05	34.26	53.86	74.00	-20.14	Peak	232	259

Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BENØ	Pol/Phase	: HORIZONTAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		

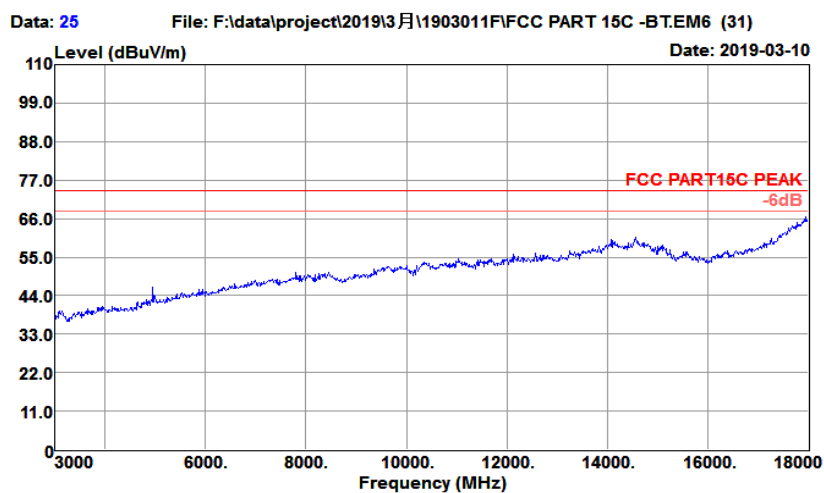


High Channel Vertical:

Building A1, Changsha E Center, No. 18 Xiangtai Avenue,
Liuyang Economic and Technological Development Zone, Hunan, P.R.C
FCC ID : 2AEUPBHALV002
IC ID: 20271-BHALV002
www.hn-ecloud.com

Tel.: +86-731-89634887
Fax.: +86-731-89634887


Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: VERTICAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		

Data: 22 File: F:\data\project\2019\3月\1903011F\FCC PART 15C -B.EM6 (31)

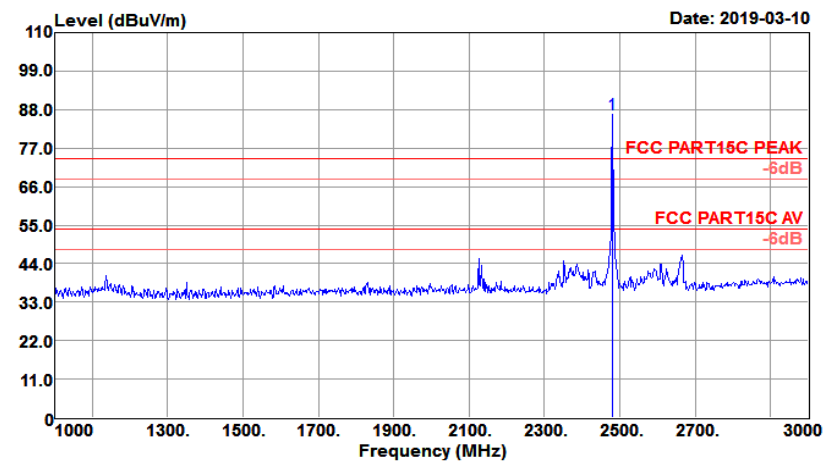


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
2480.000	92.04	27.35	3.68	36.32	86.75	74.00	12.75	Peak	**	**

Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: VERTICAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		

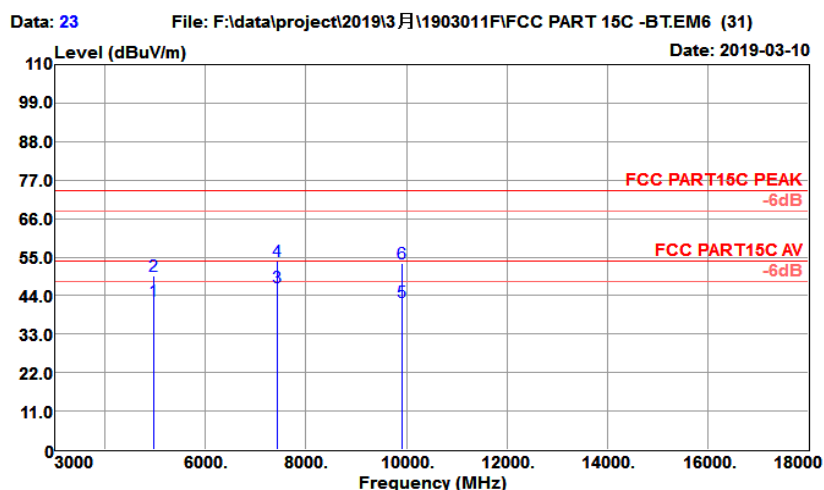

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
4960.000	41.86	31.60	5.36	36.21	42.61	54.00	-11.39	Average	162	87
4960.000	48.86	31.60	5.36	36.21	49.61	74.00	-24.39	Peak	162	87
7440.000	37.16	36.41	7.44	34.47	46.54	54.00	-7.46	Average	168	337
7440.000	44.43	36.41	7.44	34.47	53.81	74.00	-20.19	Peak	168	337
9920.000	29.93	38.36	8.05	34.26	42.08	54.00	-11.92	Average	150	296
9920.000	41.21	38.36	8.05	34.26	53.36	74.00	-20.64	Peak	158	296


Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: VERTICAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH39(2480MHz)		

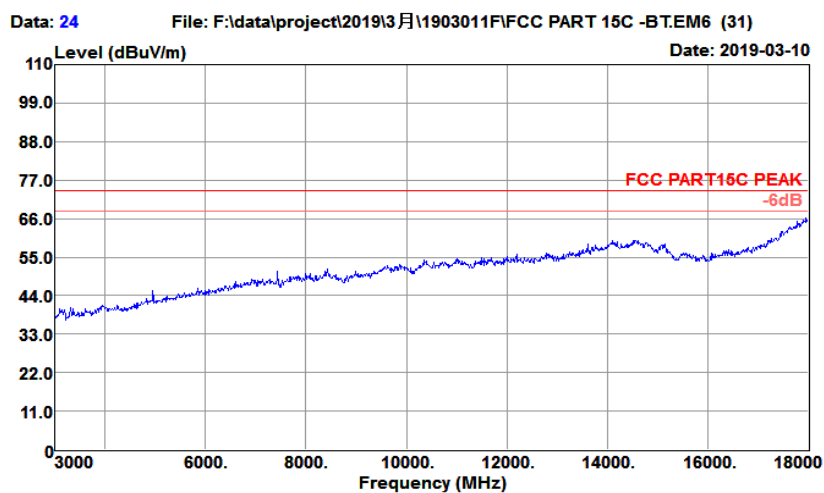

4.5.6 Test Result of Radiated Spurious Emission (30MHz ~ 1GHz)


Horizontal:

Test Site	: 3m Chamber	Temp/Humi	: 17°C/53%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: HORIZONTAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

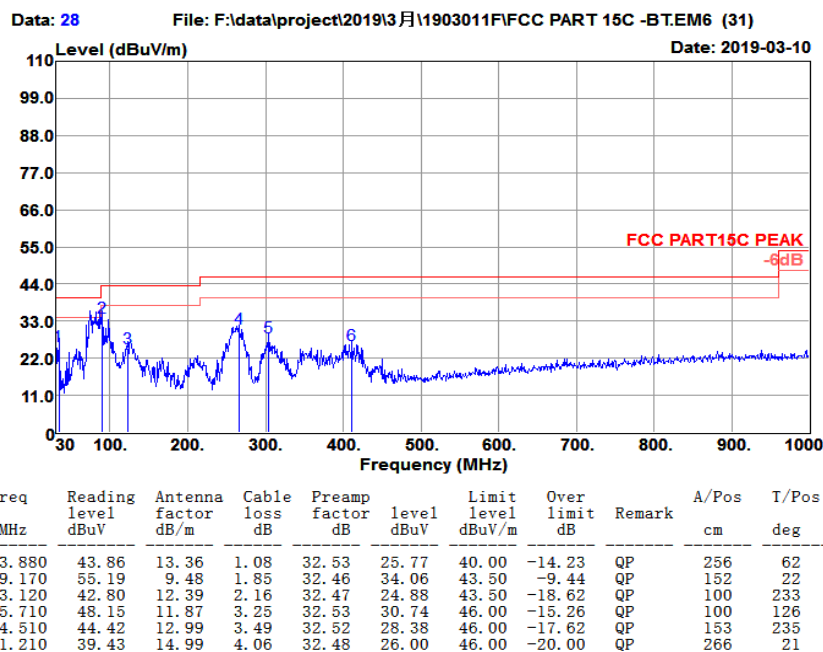

Vertical:

Test Site	: 3m Chamber	Temp/Humi	: 18°C/59%
Tested by	: Damon	Power rating:	AC 120V/60Hz
Model No.	: 5AT1S9-BEN0	Pol/Phase	: VERTICAL
EUT	: Transformer		
Test Mode	: Bluetooth 4.2-LE CH00(2402MHz)		

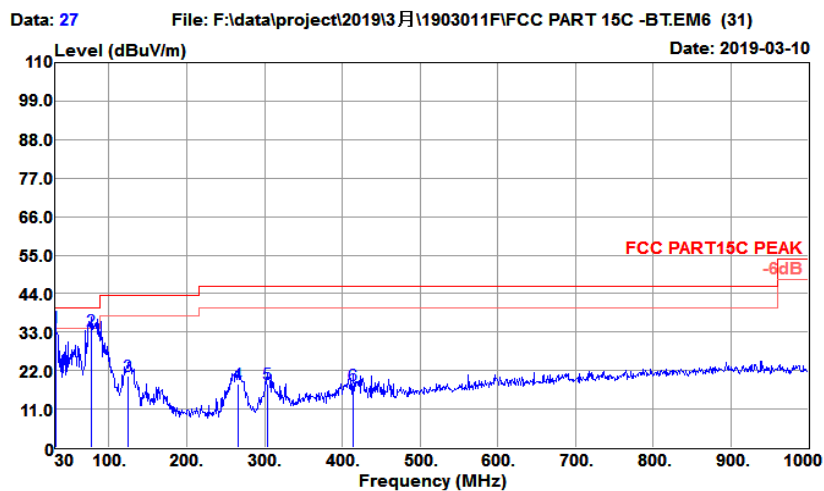

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark	A/Pos cm	T/Pos deg
30.970	52.86	13.24	0.96	32.52	34.54	40.00	-5.46	QP	100	152
76.560	54.37	9.82	1.72	32.50	33.41	40.00	-6.59	QP	153	122
125.060	38.26	12.50	2.18	32.48	20.46	43.50	-23.04	QP	100	25
265.710	35.61	11.87	3.25	32.53	18.20	46.00	-27.80	QP	189	254
304.510	34.26	12.99	3.49	32.52	18.22	46.00	-27.78	QP	152	23
414.120	31.37	15.04	4.08	32.48	18.01	46.00	-27.99	QP	145	346

4.6 AC Conducted Emission Measurement

4.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.


Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

4.6.2 Test Procedures


11. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
12. Connect EUT to the power mains through a line impedance stabilization network (LISN).
13. All the support units are connecting to the other LISN.
14. The LISN provides 50 ohm coupling impedance for the measuring instrument.
15. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
16. Both sides of AC line were checked for maximum conducted interference.
17. The frequency range from 150 kHz to 30 MHz was searched.
18. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

4.6.3 Test Result of AC Conducted Emission

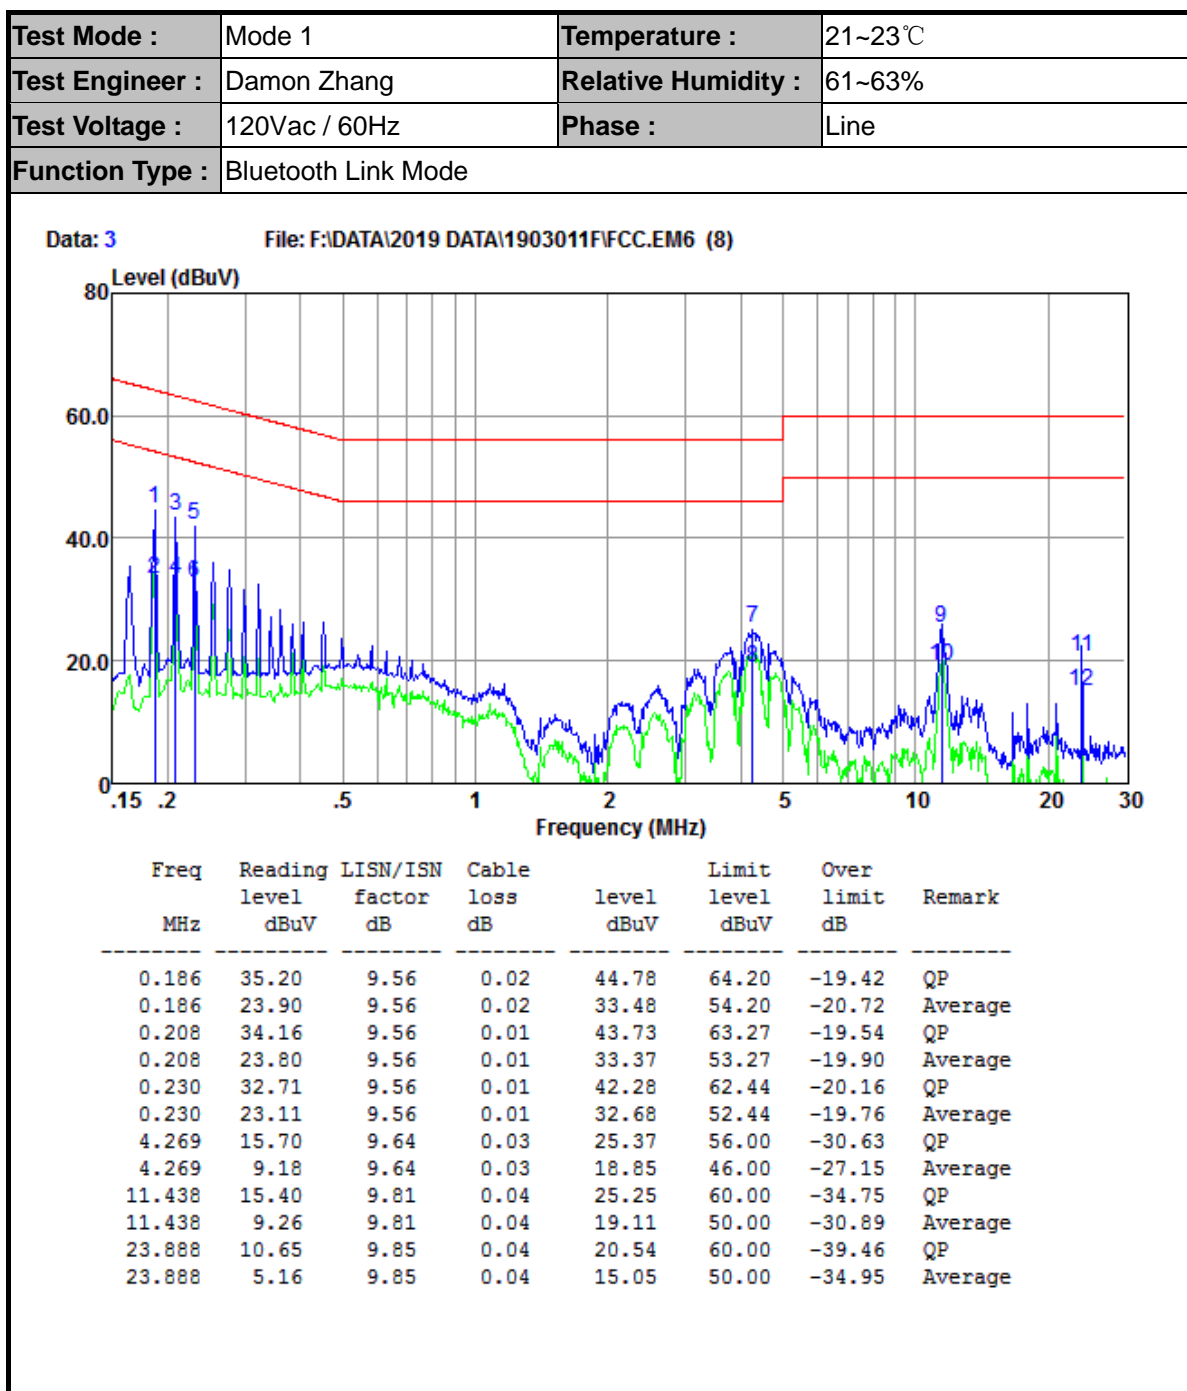

Test Mode :	Mode 1	Temperature :	21~23℃
Test Engineer :	Damon Zhang	Relative Humidity :	61~63%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link Mode		

Data: 1 File: F:\DATA\2019 DATA\1903011F\FCC.EM6 (8)

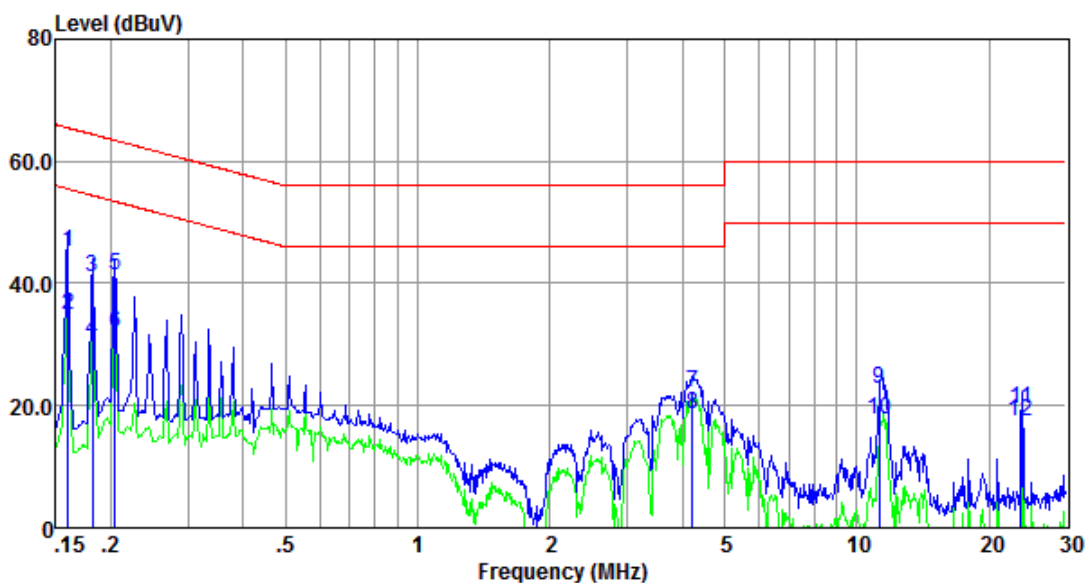

Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.160	35.69	9.55	0.06	45.30	65.46	-20.16	QP
0.160	25.19	9.55	0.06	34.80	55.46	-20.66	Average
0.182	31.30	9.56	0.03	40.89	64.42	-23.53	QP
0.182	21.10	9.56	0.03	30.69	54.42	-23.73	Average
0.204	31.60	9.57	0.01	41.18	63.45	-22.27	QP
0.204	22.20	9.57	0.01	31.78	53.45	-21.67	Average
4.224	12.30	9.69	0.03	22.02	56.00	-33.98	QP
4.224	8.80	9.69	0.03	18.52	46.00	-27.48	Average
11.220	12.91	9.87	0.04	22.82	60.00	-37.18	QP
11.220	7.91	9.87	0.04	17.82	50.00	-32.18	Average
23.620	9.50	9.93	0.04	19.47	60.00	-40.53	QP
23.620	7.30	9.93	0.04	17.27	50.00	-32.73	Average

4.7 Antenna Requirements

4.7.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 Antenna Connected Construction

An embedded-in antenna design is used.

4.7.3 Antenna Gain

The antenna peak gain of EUT is -2.5 dBi for BLE and -3.8 dBi for Lora less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	Keysight	N9010A	MY56070788	2019/1/23	2020/1/22	Conducted
Power Sensor	Keysight	U2021XA	MY56510025	2019/1/23	2020/1/22	Conducted
Power Sensor	Keysight	U2021XA	MY57030005	2019/1/23	2020/1/22	Conducted
Power Sensor	Keysight	U2021XA	MY56510018	2019/1/23	2020/1/22	Conducted
Power Sensor	Keysight	U2021XA	MY56480002	2019/1/23	2020/1/22	Conducted
Thermal Chamber	Sanmtest	SMC-408-CD	2435	2018/7/5	2019/7/4	Conducted
Base Station	R&S	CMW 270	101231	2019/1/23	2020/1/22	Conducted
Signal Generator (Interferer)	Keysight	N5182B	MY56200384	2018/04/10	2019/04/09	Conducted
Signal Generator (Blocker)	Keysight	N5171B	MY56200661	2019/1/23	2020/1/22	Conducted

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV 40	101433	2019/2/18	2020/2/17	Radiation
Amplifier	Sonoma	310	363917	2019/1/22	2020/1/21	Radiation
Amplifier	Schwarzbeck	BBV 9718	327	2019/1/22	2020/1/21	Radiation
Amplifier	Narda	TTA1840-35-HG	2034380	2018/7/18	2019/7/17	Radiation
Broadband Antenna	Schwarzbeck	VULB 9168	9168-757	2017-03-03	2020-03-02	Radiation
Horn Antenna	Schwarzbeck	BBHA 9120 D	1677	2017-03-03	2020-03-02	Radiation
Horn Antenna	COM-POWER	AH-1840	101117	2018-06-20	2021-06-19	Radiation
Test Software	Auidx	E3	6.111221a	N/A	N/A	Radiation
Filter	Micro-Tronics	BRM 50702	G266	N/A	N/A	Radiation

N/A: No Calibration Required

6. Uncertainty of Evaluation

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.64dB
Radiated emission	30MHz ~ 1GMHz	5.05dB
	1GHz ~ 18GHz	5.06 dB
	18GHz ~ 40GHz	3.65dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

-----End of the report-----