



ring

Transformer	Input: 120V AC, 60Hz
Model No:5AT1S9	Output: 12-15V AC, 200 watts max
FCC ID:2AEUPBHALV002	Ring Santa Monica, CA
IC:20271-BHALV002	Made in China
www.ring.com/patents	CAN ICES-005(B)/NMB-005(B)

AB555

RBLV11852BK000001

**Suitable for Indoor or Outdoor Use**  
**WARNING:**Risk of Fire. If installation involves running wiring through a building structure, special wiring methods are needed. Consult a qualified electrician.  
Read Installation Instructions Before Wiring.  
Suitable for Use with Submersible Luminaires. Do not immerse in water.  
For use with low voltage landscape luminaires and fittings.  
Caution – Use only with maximum 200 watt lamp load.  
**WARNING:**Not for use with receptacles that are weatherproof only when the receptacle cover is closed and the power unit is not inserted.  
Not for use with dimmers.  
Install more than 1ft (30cm) above the ground


**Do not connect two or more power supplies in parallel**

Conforms To UL STD 1838  
Certified To CSA STD C22.2 # 250.7

EFFICIENCY LEVEL VI

Intertek 5013789

CT200 Label\_Template  
Size : 109.5\*64.5mm  
Material: PET

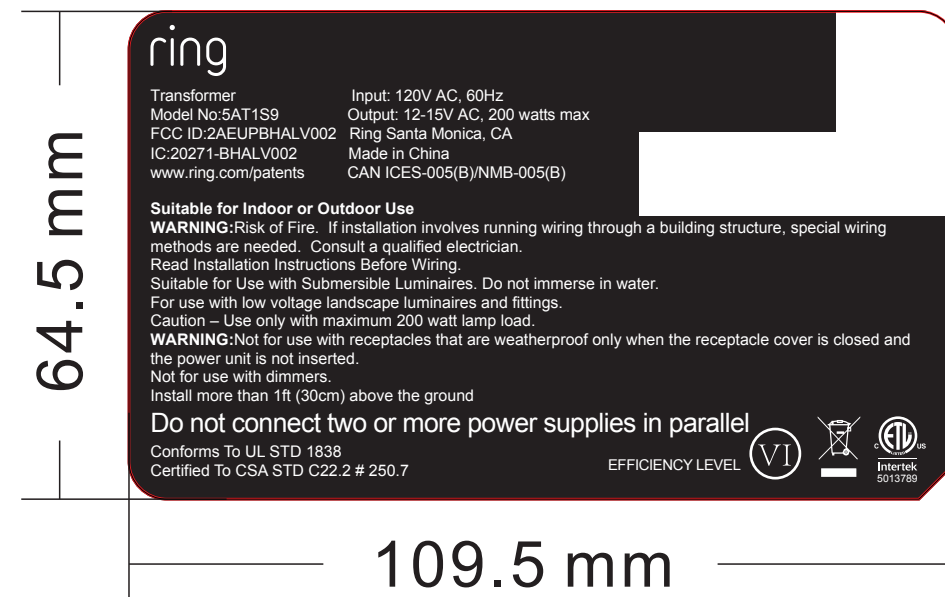

ring

Transformer	Input: 120V AC, 60Hz
Model No:5AT1S9	Output: 12-15V AC, 200 watts max
FCC ID:2AEUPBHALV002	Ring Santa Monica, CA
IC:20271-BHALV002	Made in China
www.ring.com/patents	CAN ICES-005(B)/NMB-005(B)

**Suitable for Indoor or Outdoor Use**  
**WARNING:**Risk of Fire. If installation involves running wiring through a building structure, special wiring methods are needed. Consult a qualified electrician.  
Read Installation Instructions Before Wiring.  
Suitable for Use with Submersible Luminaires. Do not immerse in water.  
For use with low voltage landscape luminaires and fittings.  
Caution – Use only with maximum 200 watt lamp load.  
**WARNING:**Not for use with receptacles that are weatherproof only when the receptacle cover is closed and the power unit is not inserted.  
Not for use with dimmers.  
Install more than 1ft (30cm) above the ground

**Do not connect two or more power supplies in parallel**

Conforms To UL STD 1838  
Certified To CSA STD C22.2 # 250.7

EFFICIENCY LEVEL VI

Intertek 5013789