

# FCC&ISED Radio Test Report


## FCC ID: 2AEUPBHARG042


## IC: 20271-BHARG042


This report concerns (check one): Original Grant Class I Change Class II Change

**Project No.** : 1803001  
**Equipment** : Ring  
**Test Model** : Video-Doorbell 2  
**Series Model** : N/A  
**Applicant** : Ring, Inc.  
**Address** : 1523 26th St, Santa Monica, CA 90404,USA

**Date of Receipt** : Apr. 02, 2018  
**Date of Test** : Apr. 02, 2018 ~ Jul. 03, 2018  
**Issued Date** : Jul. 05, 2018  
**Tested by** : BTL Inc.

**Testing Engineer** :   
(Kehji Lin)

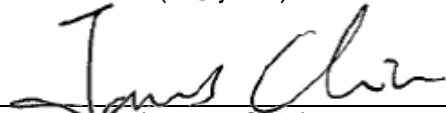**Technical Manager** :   
(James Chiu)

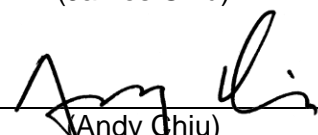**Authorized Signatory** :   
(Andy Chiu)

# **B T L I N C .**

No.18, Ln. 171, Sec. 2, Jiuzong Rd.,  
Neihu Dist., Taipei City, Taiwan (R.O.C.)  
TEL:+886-2-2657-3299 FAX: +886-2-2657-3331



**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

**Table of Contents**

**Page**

<b>1 . CERTIFICATION</b>	<b>6</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>7</b>
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
<b>3 . GENERAL INFORMATION</b>	<b>9</b>
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	11
3.4 DUTY CYCLE	12
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.6 DESCRIPTION OF SUPPORT UNITS	13
<b>4 . EMC EMISSION TEST</b>	<b>14</b>
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
4.1.2 TEST PROCEDURE	14
4.1.3 DEVIATION FROM TEST STANDARD	14
4.1.4 TEST SETUP	15
4.1.5 EUT OPERATING CONDITIONS	15
4.1.6 EUT TEST CONDITIONS	15
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS	16
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 EUT TEST CONDITIONS	19
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	19
4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)	19
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	19
<b>5 . BANDWIDTH TEST</b>	<b>20</b>
5.1 APPLIED PROCEDURES	20
5.1.1 TEST PROCEDURE	20
5.1.2 DEVIATION FROM STANDARD	20
5.1.3 TEST SETUP	20
5.1.4 EUT OPERATION CONDITIONS	20
5.1.5 EUT TEST CONDITIONS	20
5.1.6 TEST RESULTS	20

<b>Table of Contents</b>	<b>Page</b>
<b>6 . MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST</b>	<b>21</b>
<b>6.1 APPLIED PROCEDURES / LIMIT</b>	<b>21</b>
6.1.1 TEST PROCEDURE	21
6.1.2 DEVIATION FROM STANDARD	21
6.1.3 TEST SETUP	21
6.1.4 EUT OPERATION CONDITIONS	21
6.1.5 EUT TEST CONDITIONS	21
6.1.6 TEST RESULTS	21
<b>7 . ANTENNA CONDUCTED SPURIOUS EMISSION</b>	<b>22</b>
<b>7.1 APPLIED PROCEDURES / LIMIT</b>	<b>22</b>
7.1.1 TEST PROCEDURE	22
7.1.2 DEVIATION FROM STANDARD	22
7.1.3 TEST SETUP	22
7.1.4 EUT OPERATION CONDITIONS	22
7.1.5 EUT TEST CONDITIONS	22
7.1.6 TEST RESULTS	22
<b>8 . POWER SPECTRAL DENSITY TEST</b>	<b>23</b>
<b>8.1 APPLIED PROCEDURES / LIMIT</b>	<b>23</b>
8.1.1 TEST PROCEDURE	23
8.1.2 DEVIATION FROM STANDARD	23
8.1.3 TEST SETUP	23
8.1.4 EUT OPERATION CONDITIONS	23
8.1.5 EUT TEST CONDITIONS	23
8.1.6 TEST RESULTS	23
<b>9 . MEASUREMENT INSTRUMENTS LIST</b>	<b>24</b>
<b>10 . EUT TEST PHOTO</b>	<b>25</b>
<b>APPENDIX A - CONDUCTED EMISSION</b>	<b>28</b>
<b>APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)</b>	<b>29</b>
<b>APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)</b>	<b>38</b>
<b>APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)</b>	<b>43</b>
<b>APPENDIX E - BANDWIDTH</b>	<b>116</b>
<b>APPENDIX F - MAXIMUM PEAK CONDUCTED OUTPUT POWER</b>	<b>120</b>
<b>APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION</b>	<b>123</b>
<b>APPENDIX H - POWER SPECTRAL DENSITY</b>	<b>127</b>

### REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FICP-1-1803001	Original Issue.	Jul. 05, 2018

## 1. CERTIFICATION

Equipment : Ring  
Brand Name : ring  
Test Model : Video-Doorbell 2  
Series Model : N/A  
Applicant : Ring, Inc.  
Manufacturer : Goldtek Technology CO.,LTD.  
Address : 16F., No166, Jian 1st Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)  
Factory : Goldtek Technology CO.,LTD.  
Address : 16F., No166, Jian 1st Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)  
Date of Test : Apr. 02, 2018 ~ Jul. 03, 2018  
Test Sample : Engineering Sample  
Standard(s) : FCC Part15, Subpart C:(15.247) / ANSI C63.10-2013  
RSS-247 Issue 2, Feb. 2017  
RSS-GEN Issue 4, Nov. 2014

The above equipment has been tested and found in compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FICP-1-1803001) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

**Test results included in this report is only for the WIFI 2.4GHz part.**

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C Canada RSS-247 Issue 2, Feb. 2017, RSS-GEN Issue 4, Nov. 2014				
Standard(s) Section		Test Item	Judgment	Remark
FCC	IC			
15.207	RSS-GEN 8.8	Conducted Emission	N/A	NOTE (1) NOTE (2)
15.247(d)	RSS-247 5.5	Antenna conducted Spurious Emission	PASS	-----
15.247(a)(2)	RSS-247 5.2 (a)	6dB Bandwidth	PASS	-----
15.247(b)(3)	RSS-247 5.4 (d)	Peak Output Power	PASS	-----
15.247(e)	RSS-247 5.2 (b)	Power Spectral Density	PASS	-----
15.203	RSS-247 5.4 (f)(ii)	Antenna Requirement	PASS	-----
15.247(d)/ 15.205/ 15.209	RSS-247 5.5	Transmitter Radiated Emissions	PASS	-----

**NOTE:**

- (1) "N/A" denotes test is not applicable in this test report.
- (2) Input power is supplied by battery.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

### Radiated emission Test (Below 1 GHz):

**CB15:** (FCC RN:674415; FCC DN:TW0659; ISED Assigned Code:20088-5)

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)

### Radiated emission Test (Above 1 GHz):

**CB15:** (FCC RN:674415; FCC DN:TW0659; ISED Assigned Code:20088-5)

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{CISPR}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

### A. Radiated emission test:

Test Site	Method	Measurement Frequency Range	U,(dB)
CB15 (3m)	CISPR	9kHz ~ 150kHz	2.82
		150kHz ~ 30MHz	2.58

Test Site	Method	Measurement Frequency Range	Ant.	U,(dB)
CB15 (3m)	CISPR	30MHz ~ 200MHz	V	4.20
		30MHz ~ 200MHz	H	3.64
		200MHz ~ 1,000MHz	V	4.56
		200MHz ~ 1,000MHz	H	3.90

Test Site	Method	Measurement Frequency Range	Ant.	U,(dB)
CB15 (3m)	CISPR	1GHz ~ 6GHz	V	4.46
		1GHz ~ 6GHz	H	4.40
		6GHz ~ 18GHz	V	3.88
		6GHz ~ 18GHz	H	4.00

Test Site	Method	Measurement Frequency Range	U,(dB)
CB15 (1m)	CISPR	18 ~ 26.5 GHz	4.62
		26.5 ~ 40 GHz	5.12

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above.

These are our  $U_{lab}$  values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called  $U_{CISPR}$ , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz: 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz: 5.2 dB

It can be seen that our  $U_{lab}$  values are smaller than  $U_{CISPR}$ .

Note: unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.



### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Ring
Brand Name	ring
Test Model	Video-Doorbell 2
Series Model	N/A
Model Difference	N/A
Power Source	Battery supplied. (Battery is charged independently by USB power supply)
Power Rating	Battery charge input: DC 5V Battery output: (1) FUJI/V4: DC 3.65V 6040mAh 22.046Wh (2) WTELG/V4: DC 3.65V 6040mAh 22.046Wh (3) WTEPanasonic/V4: DC 3.65V 6040mAh 22.046Wh
Products Covered	3 * Battery: (1) FUJI/V4 (2) WTELG/V4 (3) WTEPanasonic /V4
Operation Frequency	2412~2462 MHz
Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM
Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 72.2 Mbps
Output Power (Max.)	802.11b: 15.11dBm 802.11g: 19.63dBm 802.11n(20MHz): 19.47dBm

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Channel List:

CH01 – CH11 for 802.11b, 802.11g, 802.11n(20MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna:

Group I:

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)
1	WIESON	GY196HT0264L-010	Dipole Antenna	SMA	1.38

Group II:

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)
1	WIESON	GY196IT007-007)	PCB Antenna	N/A	1.42

### 3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Following mode(s) as (were) found to be the worst case(s) and selected for the final test.

Test Items	Test mode	Channel	Note
Transmitter Radiated Emissions (BELOW 1GHz)	TX B MODE	06	PCB Antenna
	TX B MODE	11	Dipole Antenna
Transmitter Radiated Emissions (ABOVE 1GHz)	TX B MODE	01/06/11	PCB Antenna Dipole Antenna
	TX G MODE	01/06/11	
	TX N-20M MODE	01/06/11	
6dB Bandwidth	TX B MODE	01/06/11	PCB Antenna
	TX G MODE	01/06/11	PCB Antenna
	TX N-20M MODE	01/06/11	PCB Antenna
Peak Output Power	TX B MODE	01/06/11	PCB Antenna
	TX G MODE	01/06/11	PCB Antenna
	TX N-20M MODE	01/06/11	PCB Antenna
Antenna conducted Spurious Emission	TX B MODE	01/06/11	PCB Antenna
	TX G MODE	01/06/11	PCB Antenna
	TX N-20M MODE	01/06/11	PCB Antenna
Power Spectral Density	TX B MODE	01/06/11	PCB Antenna
	TX G MODE	01/06/11	PCB Antenna
	TX N-20M MODE	01/06/11	PCB Antenna

Note:

- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1Mbps)  
 802.11g mode: OFDM (6Mbps)  
 802.11n HT20 mode : BPSK (MCS 0)  
 For radiated emission tests, the highest output powers were set for final test.

### 3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	RadioToolGUI Version 0.8.5973.20907		
Frequency (MHz)	2412	2437	2462
802.11b	0	0	0
802.11g	0	0	0
802.11n (20MHz)	0	0	0


### 3.4 DUTY CYCLE

If duty cycle is  $\geq 98\%$ , duty factor is not required.  
 If duty cycle is  $< 98\%$ , duty factor shall be considered.

IEEE 802.11b	IEEE 802.11g
<p>Date: 8.MAY.2018 16:14:31</p>	<p>Date: 8.MAY.2018 16:19:33</p>
<p>Duty cycle = 11.460 ms / 11.940 ms = 95.98 %                  Duty Factor = <math>10 * \log(1 / 0.9598) = 0.18</math></p>	<p>Duty cycle = 1.890 ms / 2.040 ms = 92.65 %                  Duty Factor = <math>10 * \log(1 / 0.9265) = 0.33</math></p>
IEEE 802.11n (20 MHz)	
<p>Date: 8.MAY.2018 16:21:28</p>	<p>Duty cycle = 1.750 ms / 1.880 ms = 93.09 %                  Duty Factor = <math>10 * \log(1 / 0.9309) = 0.31</math></p>

Note:  
 For IEEE 802.11b, IEEE 802.11g and IEEE 802.11n (20 MHz):  
 For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle  $< 98\%$ ).

**3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**



**3.6 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	-

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 -0.50	66 to 56*	56 to 46*
0. 0 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " \* " decreases with the logarithm of the frequency
- (2) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


#### 4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

**4.1.4 TEST SETUP**

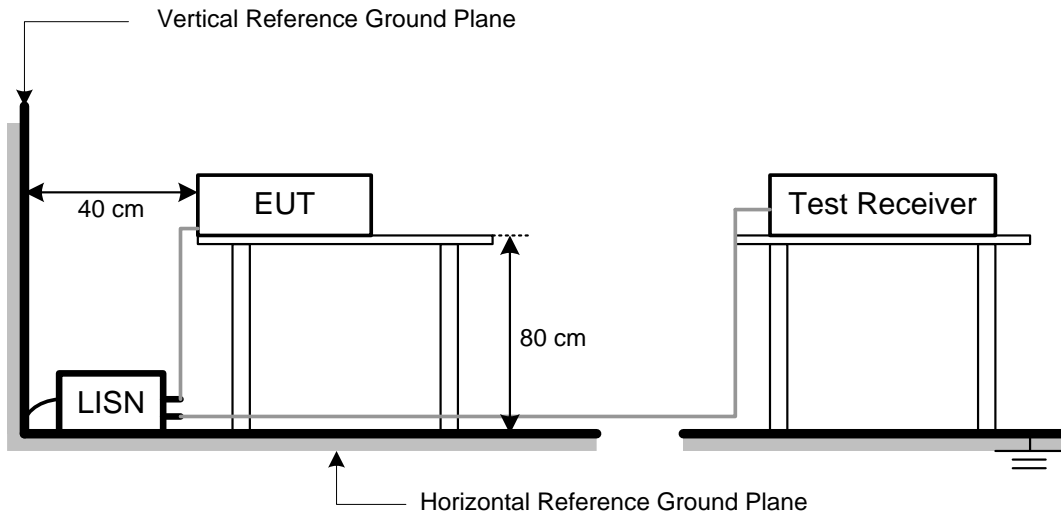

**4.1.5 EUT OPERATING CONDITIONS**

The EUT was placed on the test table and programmed in normal function.

**4.1.6 EUT TEST CONDITIONS**

Temperature: N/A    Relative Humidity: N/A    Test Voltage: N/A

**4.1.7 TEST RESULTS**

Please refer to the Appendix A.

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a) & RSS-247 5.5, then the 15.209(a) & RSS-Gen limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

**Notes:**

- (1) The limit for radiated test was performed according to FCC PART 15C/RSS-247.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
 Margin Level = Measurement Value - Limit Value



Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

**4.2.2 TEST PROCEDURE**


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**4.2.3 DEVIATION FROM TEST STANDARD**


No deviation

**4.2.4 TEST SETUP**


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

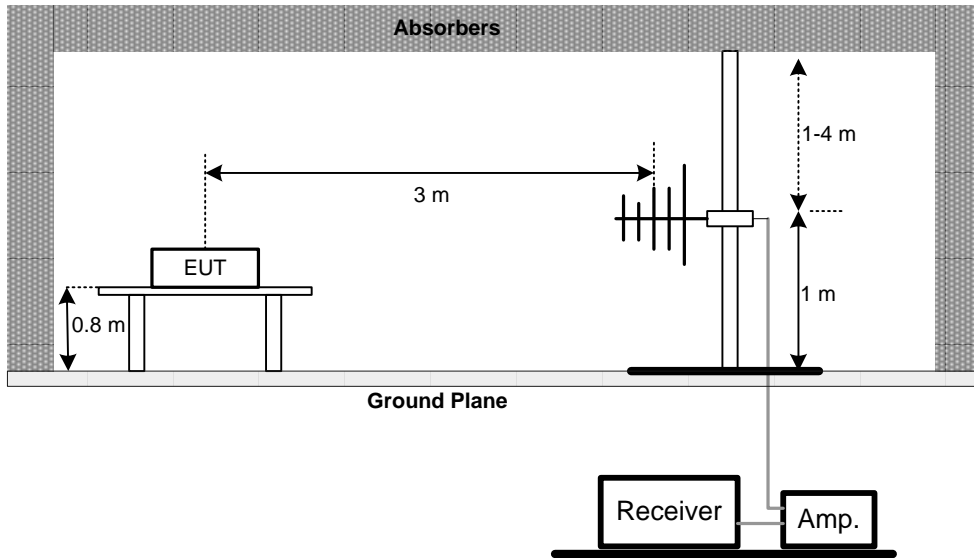

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz  
Band edge

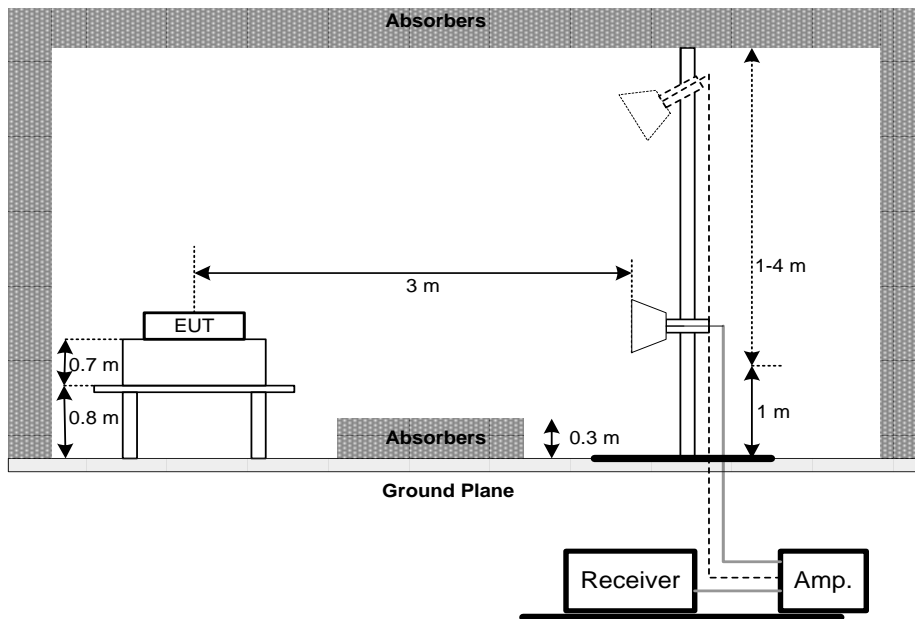

(C) For Radiated Emissions Below 30MHz

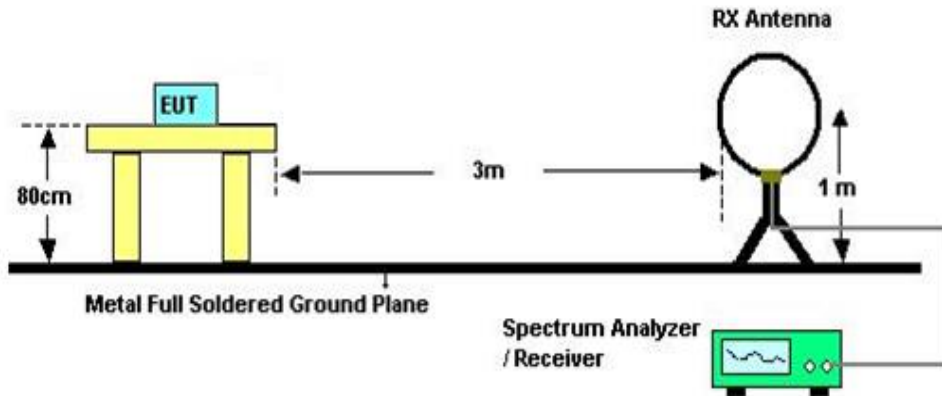

**4.2.5 EUT OPERATING CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

**4.2.6 EUT TEST CONDITIONS**

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: DC 3.6V

**4.2.7 TEST RESULTS (9KHZ TO 30MHZ)**

Please refer to the Appendix B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

**4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)**

Please refer to the Appendix C.

**4.2.9 TEST RESULTS (ABOVE 1000 MHZ)**

Please refer to the Appendix D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable. For fundamental signal judgment was referred to Peak output test.

**5. BANDWIDTH TEST**

**5.1 APPLIED PROCEDURES**

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-247			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2) RSS-GEN section 6.6 RSS-247 5.2 (a)	Bandwidth	2400-2483.5	PASS

**5.1.1 TEST PROCEDURE**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

**5.1.2 DEVIATION FROM STANDARD**

No deviation.

**5.1.3 TEST SETUP**



**5.1.4 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

**5.1.5 EUT TEST CONDITIONS**

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: DC 3.6V

**5.1.6 TEST RESULTS**

Please refer to the Appendix E.

## 6. MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST

### 6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C/ RSS-247				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3) RSS-247 5.4 (d)	Maximum Output Power	1 Watt or 30dBm	2400-2483.5	PASS

#### 6.1.1 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance.

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP



#### 6.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

#### 6.1.5 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: DC 3.6V

#### 6.1.6 TEST RESULTS

Please refer to the Appendix F.

## 7. ANTENNA CONDUCTED SPURIOUS EMISSION

### 7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.


#### 7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.
- c. Offset=antenna gain+cable loss

#### 7.1.2 DEVIATION FROM STANDARD

No deviation.

#### 7.1.3 TEST SETUP

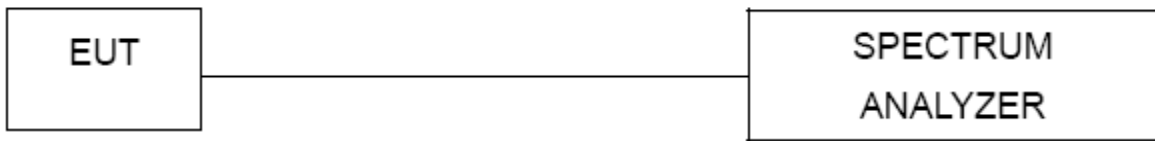

#### 7.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

#### 7.1.5 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: DC 3.6V

#### 7.1.6 TEST RESULTS

Please refer to the Appendix G.

## 8. POWER SPECTRAL DENSITY TEST

### 8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C / RSS-247				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e) RSS-247 5.2 (b)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


#### 8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

#### 8.1.2 DEVIATION FROM STANDARD

No deviation.

#### 8.1.3 TEST SETUP

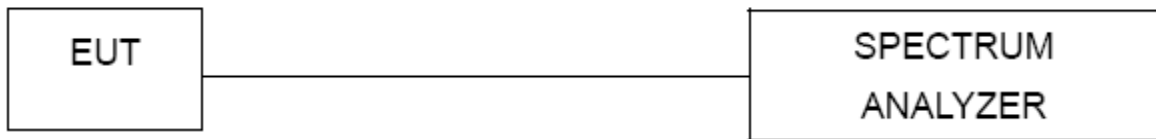

#### 8.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

#### 8.1.5 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 55%    Test Voltage: DC 3.6V

#### 8.1.6 TEST RESULTS

Please refer to the Appendix H.

## 9. MEASUREMENT INSTRUMENTS LIST

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Preamplifier	EMCI	012645B	980267	Feb. 27, 2019
2	Preamplifier	EMCI	EMC02325	980217	Dec. 27, 2019
3	Preamplifier	EMCI	EMC2654045	980030	Feb. 13, 2019
4	Test Cable	EMCI	EMC104-SM-S M-8000	8m	Jan. 03, 2019
5	Test Cable	EMCI	EMC104-SM-S M-800	150207	Jan. 03, 2019
6	Test Cable	EMCI	EEMC104-SM-S M-3000	151205	Jan. 03, 2019
7	MXE EMI Receiver	Agilent	N9038A	MY5542012 7	Jan. 08, 2019
8	Signal Analyzer	Agilent	N9010A	MY5222099 0	Feb. 21, 2019
9	Loop Ant	EMCI	LPA600	274	May 03, 2019
10	Horn Ant	SCHWARZBECK	BBHA 9120D	9120D-1342	Feb. 27, 2019
11	Horn Ant	Schwarzbeck	BBHA 9170	187	Dec. 05, 2018
12	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-548	Jan. 15, 2019
13	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0623	Jan. 15, 2019

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 24, 2019

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2495A	1128008	Aug. 16, 2018
2	Power Sensor	Anritsu	MA2411B	1126001	Aug. 16, 2018

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 24, 2019

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 24, 2019

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.



## APPENDIX A - CONDUCTED EMISSION


**Test Mode: N/A**

Note: "N/A" denotes test is not applicable to this device.

## APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX B MODE 2437MHz \_ Antenna Type: PCB

Ant 90°

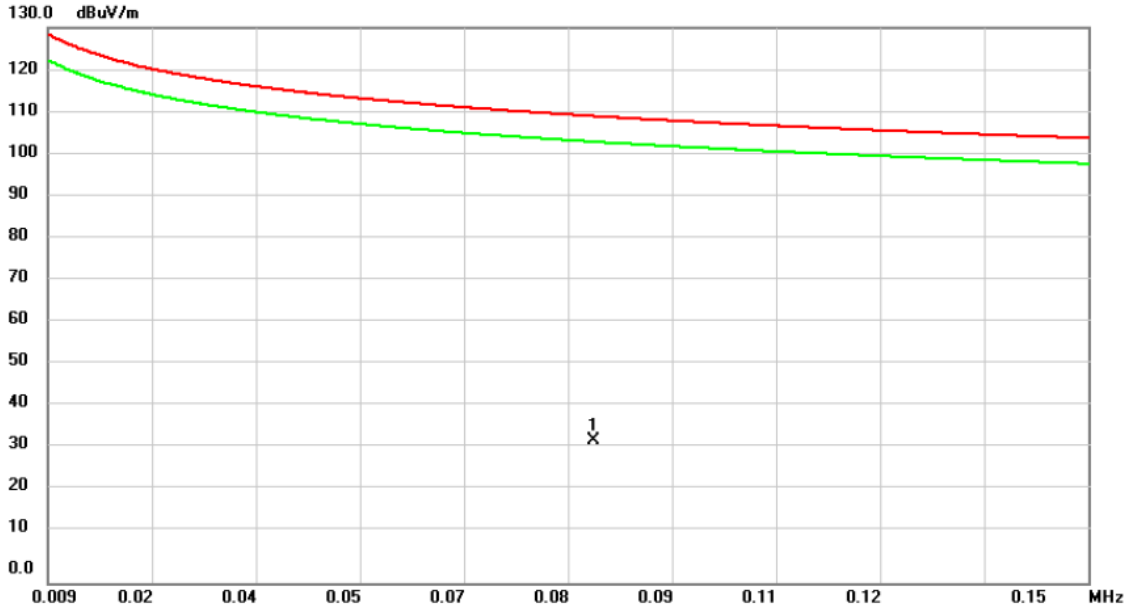

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.0830	15.47	17.94	33.41	109.22	-75.81	peak	

Test Mode: TX B MODE 2437MHz \_ Antenna Type: PCB


Ant 90°



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		0.5080	30.86	3.43	34.29	73.49	-39.20	peak	
2	*	1.4932	30.69	-1.62	29.07	64.12	-35.05	peak	
3		3.9708	30.48	-3.79	26.69	69.54	-42.85	peak	
4		6.2393	30.54	-4.05	26.49	69.54	-43.05	peak	
5		9.3734	30.95	-4.71	26.24	69.54	-43.30	peak	
6		11.7911	29.77	-4.82	24.95	69.54	-44.59	peak	

Test Mode: TX B MODE 2437MHz \_ Antenna Type: PCB


Ant 0°

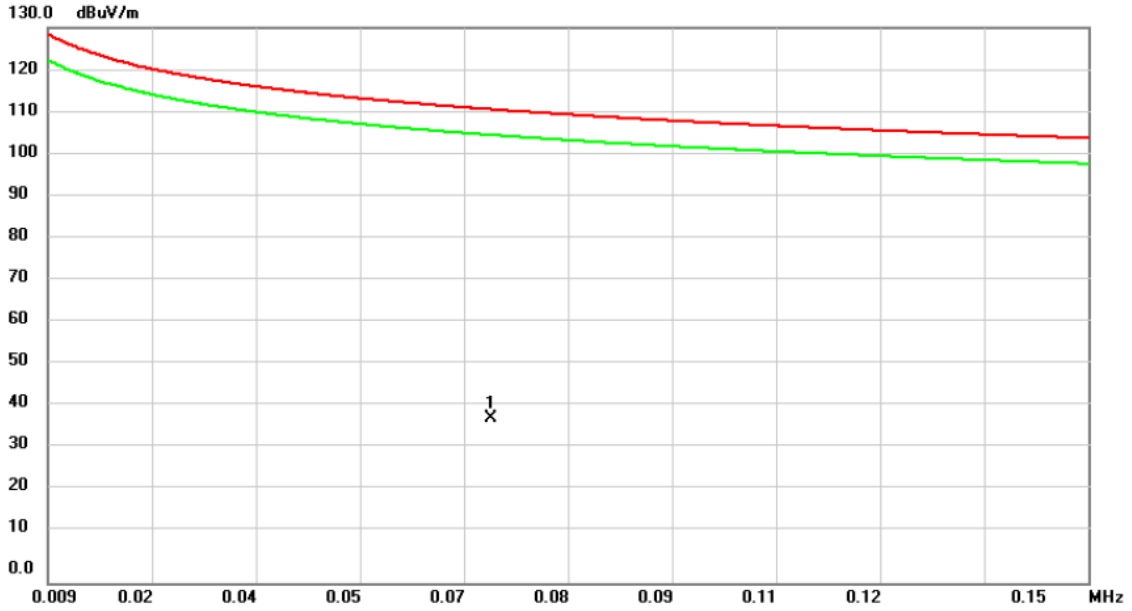

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.0690	19.11	19.45	38.56	110.83	-72.27	peak	

Test Mode: TX B MODE 2437MHz \_ Antenna Type: PCB


Ant 0°

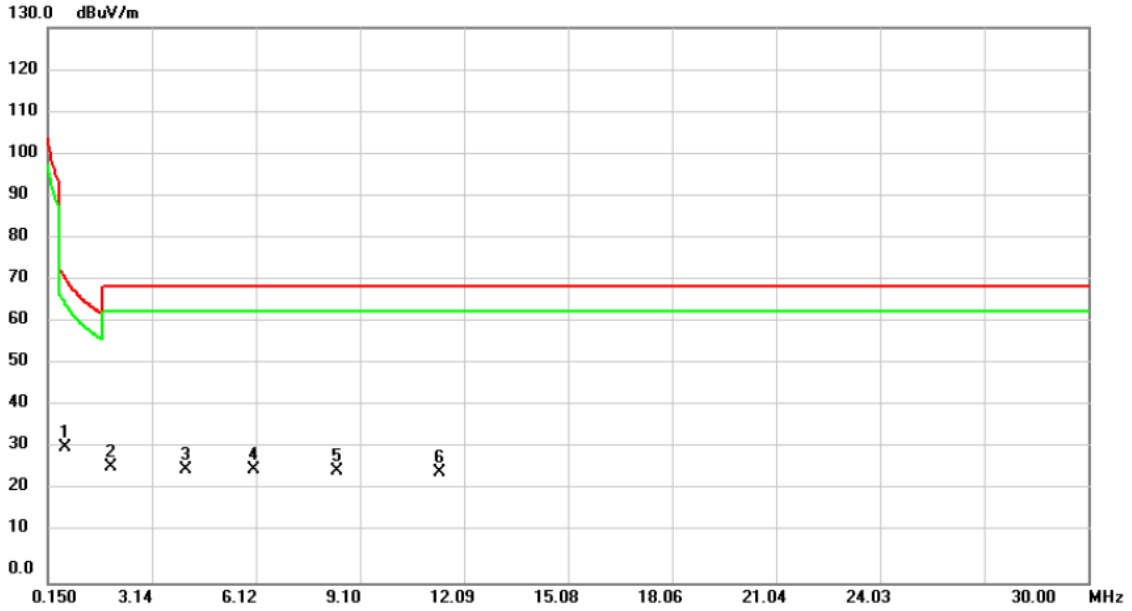

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	0.6276	29.32	2.25	31.57	71.65	-40.08	peak	
2		1.9708	30.06	-2.86	27.20	69.54	-42.34	peak	
3		4.1200	30.27	-3.81	26.46	69.54	-43.08	peak	
4		6.0602	30.43	-4.03	26.40	69.54	-43.14	peak	
5		8.4481	30.56	-4.49	26.07	69.54	-43.47	peak	
6		11.4032	30.50	-4.81	25.69	69.54	-43.85	peak	

Test Mode: TX B MODE 2462MHz \_ Antenna Type: Dipole


Ant 90°

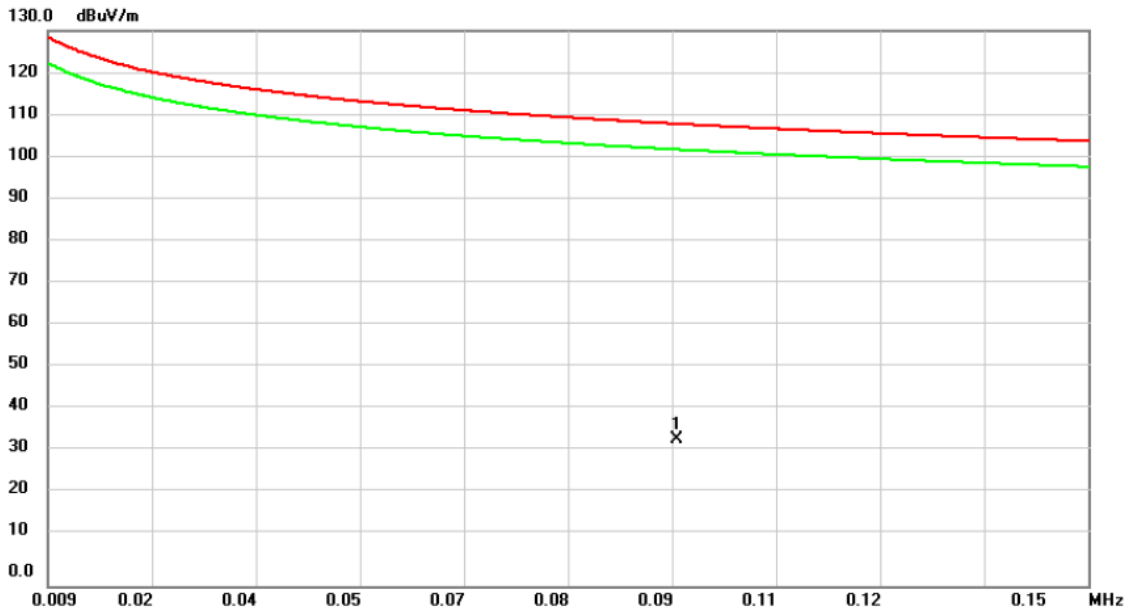

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	0.0942	17.38	16.77	34.15	108.12	-73.97	peak	

Test Mode: TX B MODE 2462MHz \_ Antenna Type: Dipole

Ant 90°

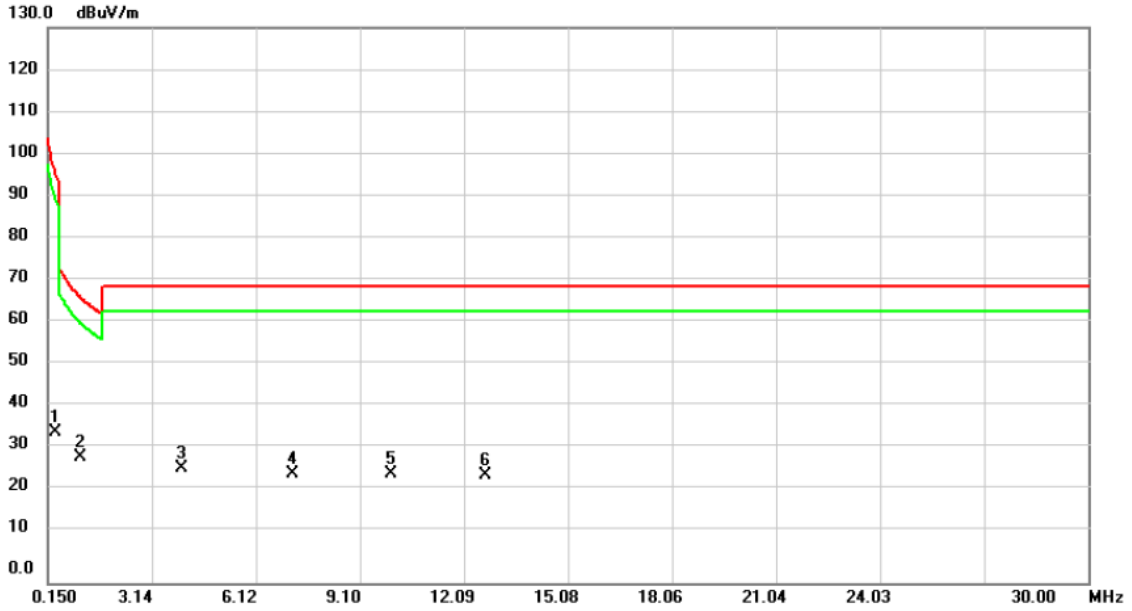


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		0.3886	30.12	5.10	35.22	95.81	-60.59	peak	
2	*	1.0750	30.07	-0.54	29.53	66.98	-37.45	peak	
3		3.9708	30.48	-3.79	26.69	69.54	-42.85	peak	
4		7.1646	29.83	-4.16	25.67	69.54	-43.87	peak	
5		10.0004	30.32	-4.71	25.61	69.54	-43.93	peak	
6		12.6870	30.13	-4.82	25.31	69.54	-44.23	peak	



Test Mode: TX B MODE 2462MHz \_ Antenna Type: Dipole


Ant 0°

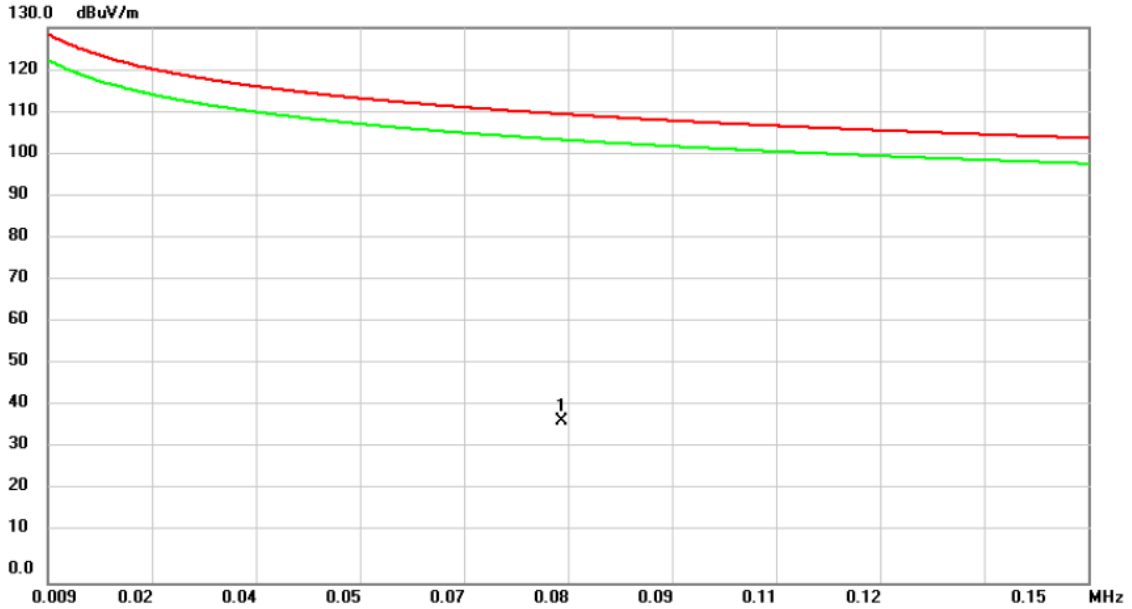

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	0.0786	19.43	18.35	37.78	109.70	-71.92	peak	

Test Mode: TX B MODE 2462MHz \_ Antenna Type: Dipole


Ant 0°

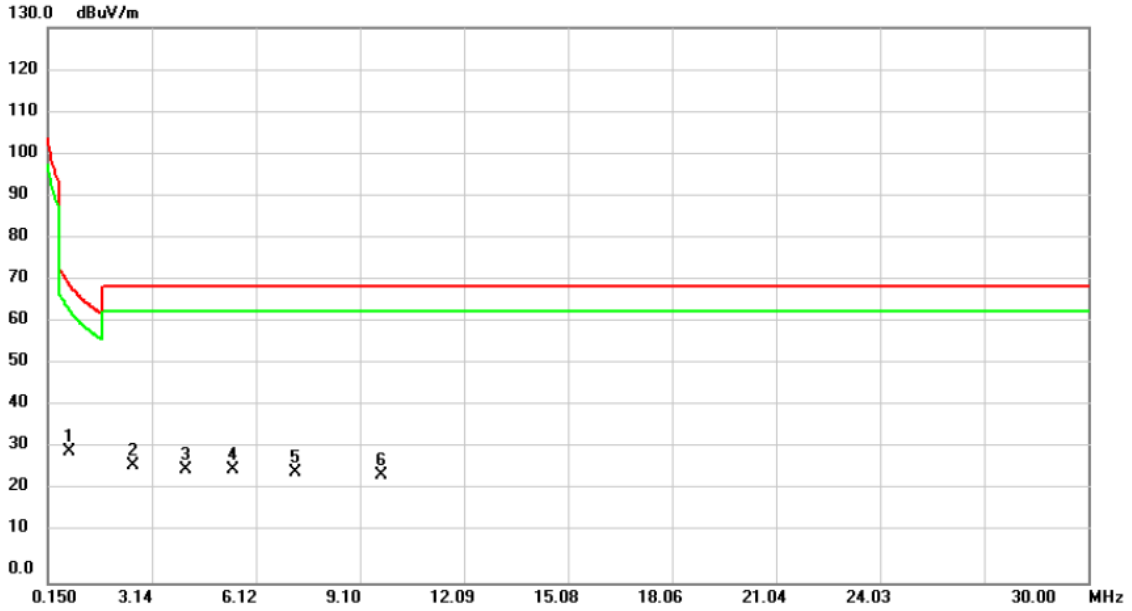

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	0.7770	30.00	0.71	30.71	69.80	-39.09	peak	
2		2.5977	30.70	-3.37	27.33	69.54	-42.21	peak	
3		4.1200	30.27	-3.81	26.46	69.54	-43.08	peak	
4		5.4633	30.50	-3.97	26.53	69.54	-43.01	peak	
5		7.2541	30.10	-4.18	25.92	69.54	-43.62	peak	
6		9.7317	29.85	-4.71	25.14	69.54	-44.40	peak	


## APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode	TX B MODE 2437MHz _ Antenna Type: PCB	Polarization	Vertical
-----------	---------------------------------------	--------------	----------

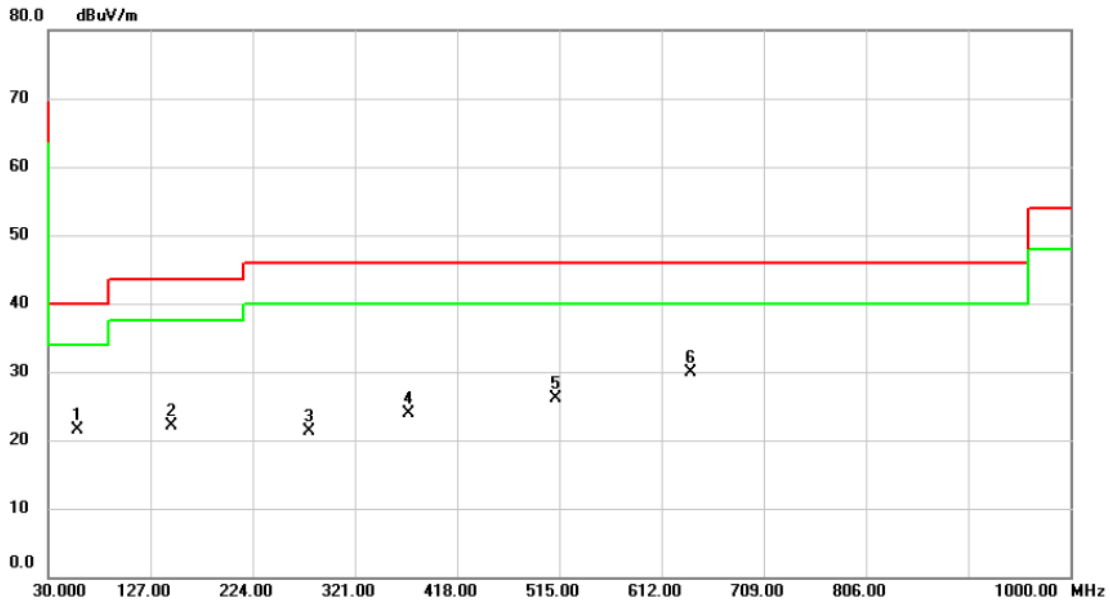


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		58.1300	30.19	-8.61	21.58	40.00	-18.42	peak	
2		147.3700	30.70	-8.67	22.03	43.50	-21.47	peak	
3		277.3500	29.17	-7.86	21.31	46.00	-24.69	peak	
4		371.4400	29.70	-5.72	23.98	46.00	-22.02	peak	
5		512.0900	28.89	-2.71	26.18	46.00	-19.82	peak	
6	*	639.1600	29.76	0.05	29.81	46.00	-16.19	peak	

Test Mode	TX B MODE 2437MHz _ Antenna Type: PCB	Polarization	Horizontal
-----------	---------------------------------------	--------------	------------

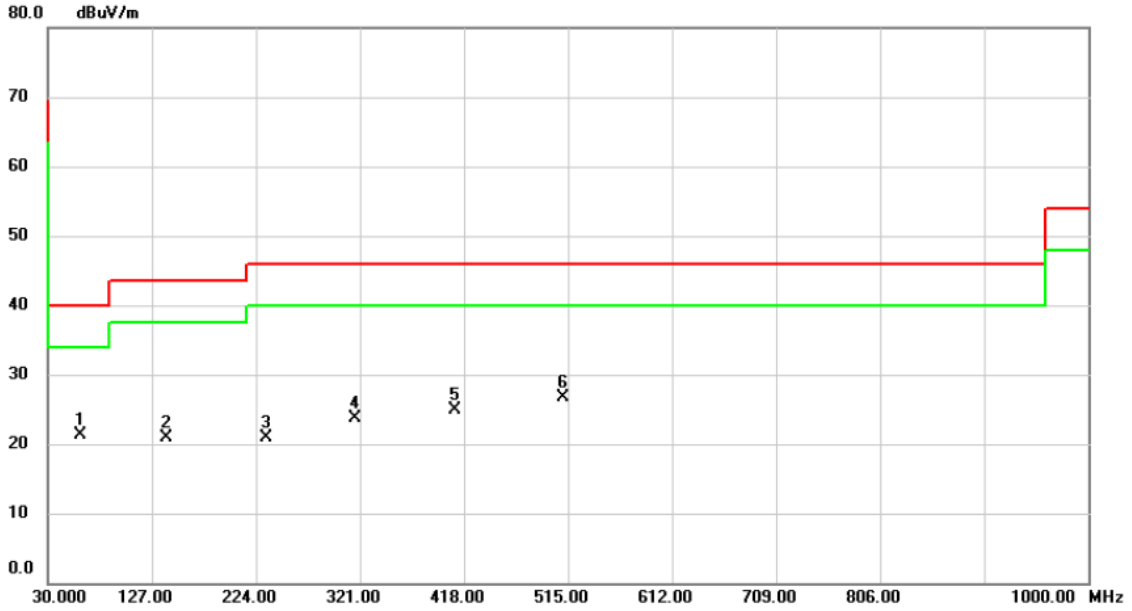


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	60.0700	30.07	-8.76	21.31	40.00	-18.69	peak	
2		140.5800	29.64	-8.81	20.83	43.50	-22.67	peak	
3		233.7000	30.32	-9.39	20.93	46.00	-25.07	peak	
4		316.1500	30.81	-7.09	23.72	46.00	-22.28	peak	
5		409.2700	29.68	-4.83	24.85	46.00	-21.15	peak	
6		510.1500	29.49	-2.74	26.75	46.00	-19.25	peak	

Test Mode	TX B MODE 2462MHz _ Antenna Type: Dipole	Polarization	Vertical
-----------	--	--------------	----------

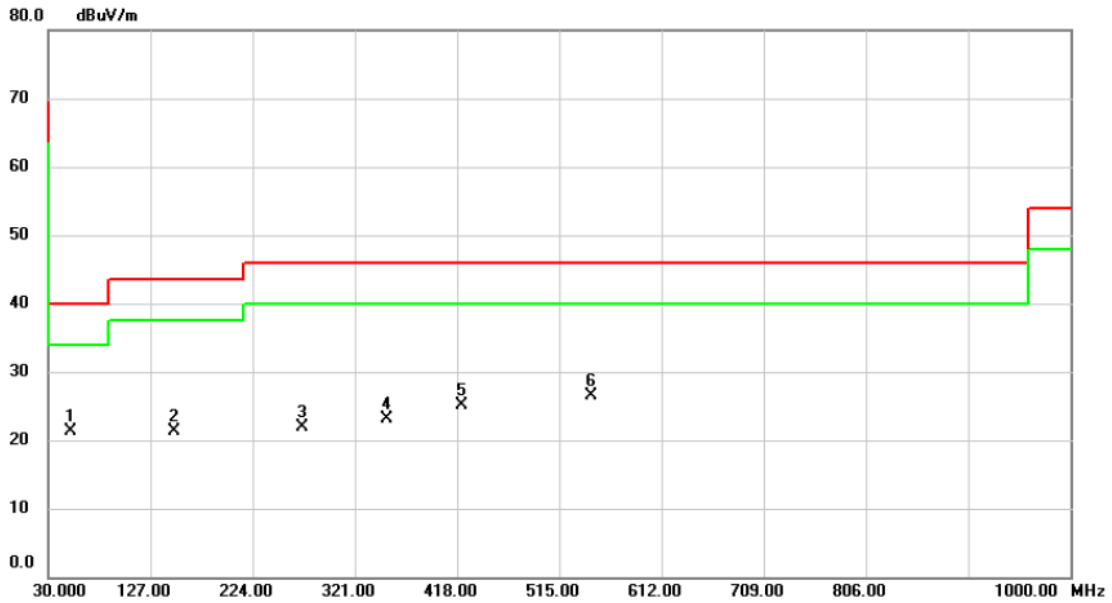

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	51.3400	29.35	-8.13	21.22	40.00	-18.78	peak	
2		149.3100	29.97	-8.63	21.34	43.50	-22.16	peak	
3		270.5600	29.83	-8.00	21.83	46.00	-24.17	peak	
4		351.0700	29.36	-6.18	23.18	46.00	-22.82	peak	
5		421.8800	29.60	-4.51	25.09	46.00	-20.91	peak	
6		545.0700	28.68	-2.11	26.57	46.00	-19.43	peak	

Test Mode TX B MODE 2462MHz \_ Antenna Type: Dipole Polarization Horizontal

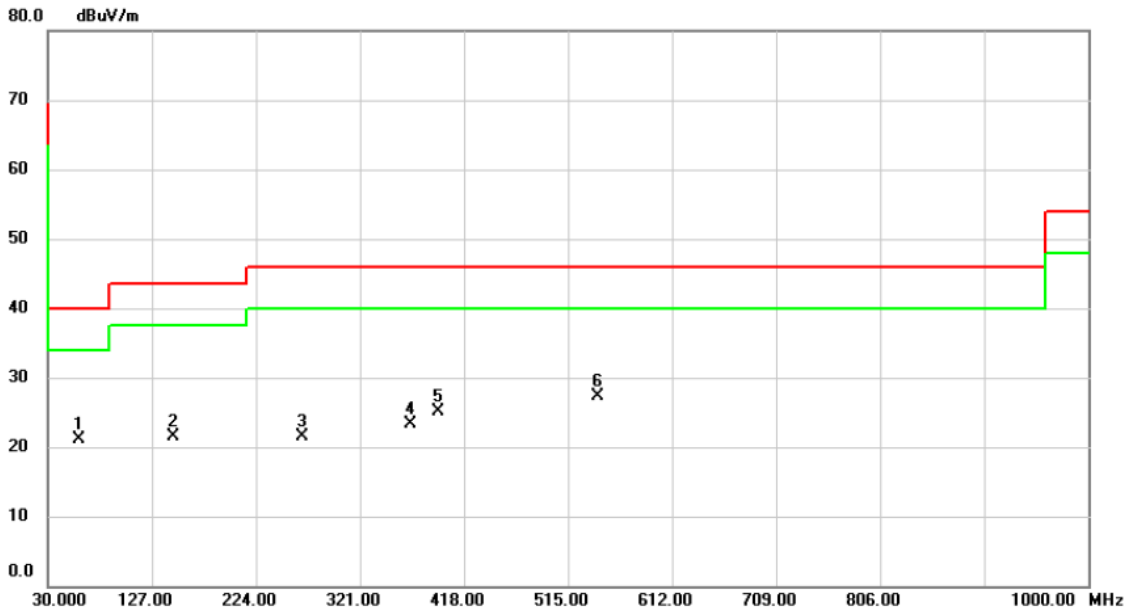


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		59.1000	29.73	-8.69	21.04	40.00	-18.96	peak	
2		146.4000	30.19	-8.69	21.50	43.50	-22.00	peak	
3		267.6500	29.66	-8.17	21.49	46.00	-24.51	peak	
4		368.5300	29.14	-5.78	23.36	46.00	-22.64	peak	
5		393.7500	30.37	-5.21	25.16	46.00	-20.84	peak	
6	*	543.1300	29.49	-2.14	27.35	46.00	-18.65	peak	

## APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)



Test Mode	TX B MODE _2412 MHz_ Antenna Type: PCB	Polarization	Vertical
-----------	--	--------------	----------


**Orthogonal Axis: Z**

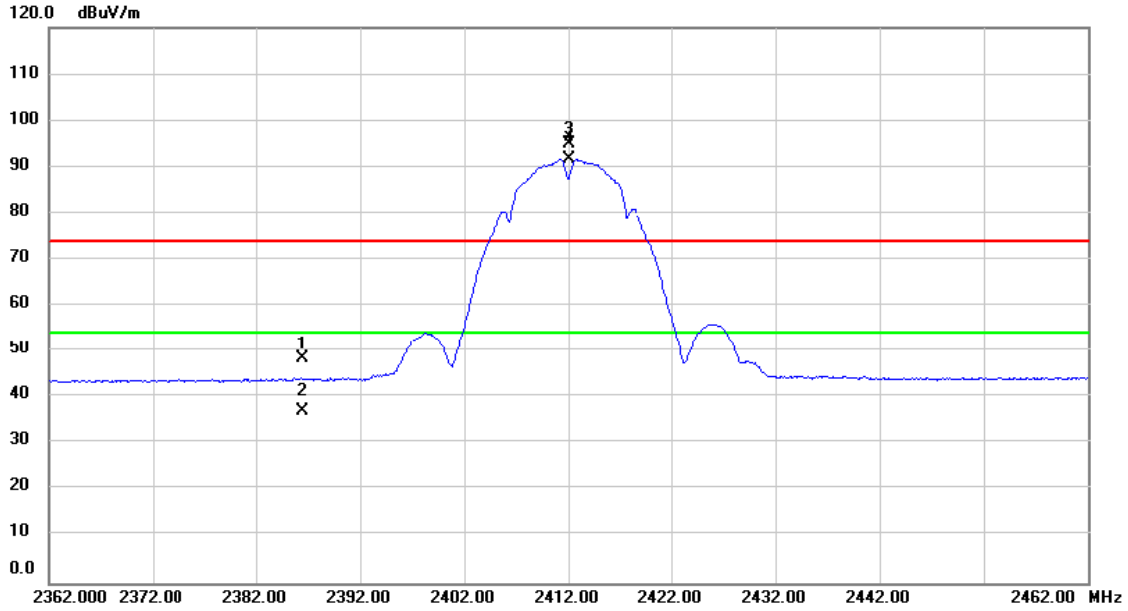

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2386.444	17.74	30.83	48.57	74.00	-25.43	peak	
2		2386.444	6.23	30.83	37.06	54.00	-16.94	AVG	
3	X	2412.000	64.01	30.92	94.93	74.00	20.93	peak	No Limit
4	*	2412.000	60.68	30.92	91.60	54.00	37.60	AVG	No Limit

Test Mode	TX B MODE _2412 MHz_ Antenna Type: PCB	Polarization	Vertical
-----------	--	--------------	----------


Orthogonal Axis: Z

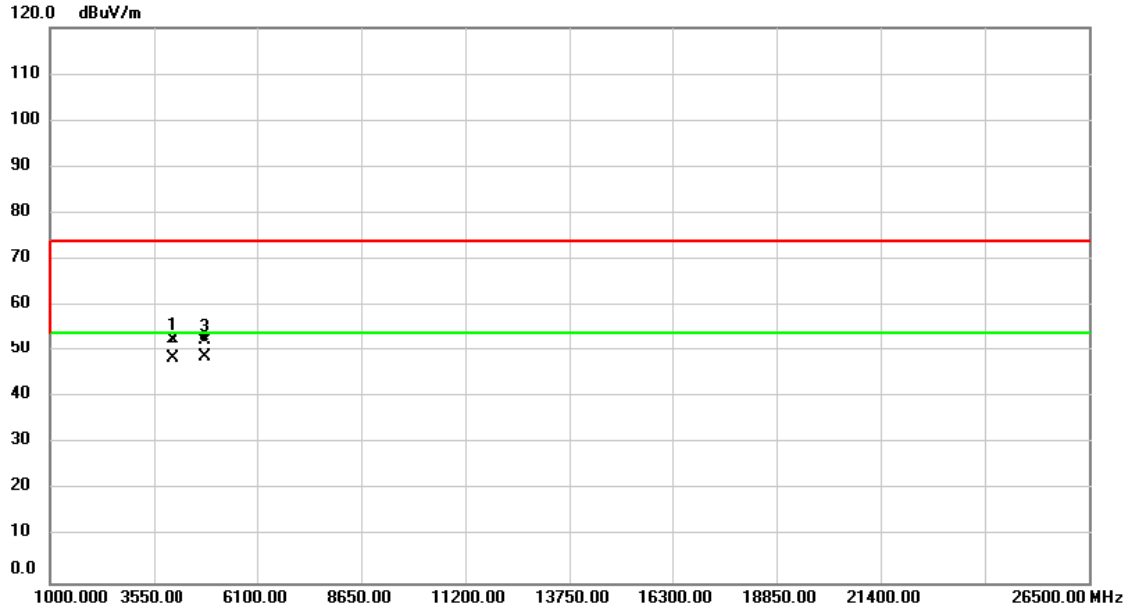

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4020.000	65.85	-13.07	52.78	74.00	-21.22	peak	
2		4020.000	61.56	-13.07	48.49	54.00	-5.51	AVG	
3		4824.000	63.77	-11.48	52.29	74.00	-21.71	peak	
4	*	4824.000	60.13	-11.48	48.65	54.00	-5.35	AVG	

Test Mode	TX B MODE _2412 MHz_ Antenna Type: PCB	Polarization	Horizontal
-----------	--	--------------	------------


Orthogonal Axis: Z

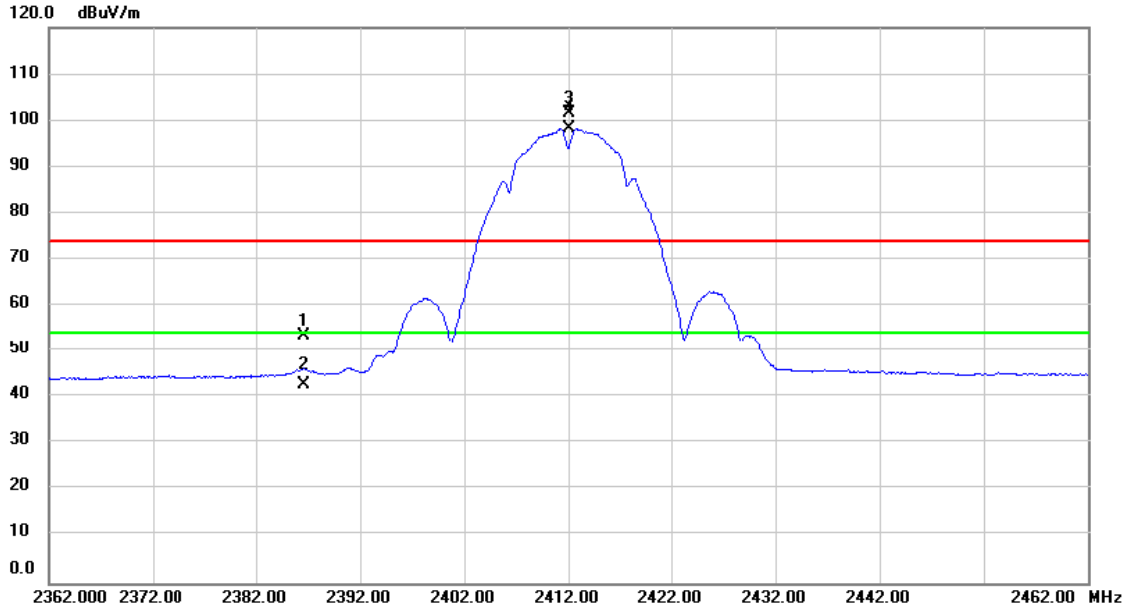

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2386.584	22.69	30.83	53.52	74.00	-20.48	peak	
2		2386.584	11.92	30.83	42.75	54.00	-11.25	AVG	
3	X	2412.000	70.59	30.92	101.51	74.00	27.51	peak	No Limit
4	*	2412.000	67.22	30.92	98.14	54.00	44.14	AVG	No Limit

Test Mode	TX B MODE _2412 MHz_ Antenna Type: PCB	Polarization	Horizontal
-----------	--	--------------	------------


**Orthogonal Axis: Z**

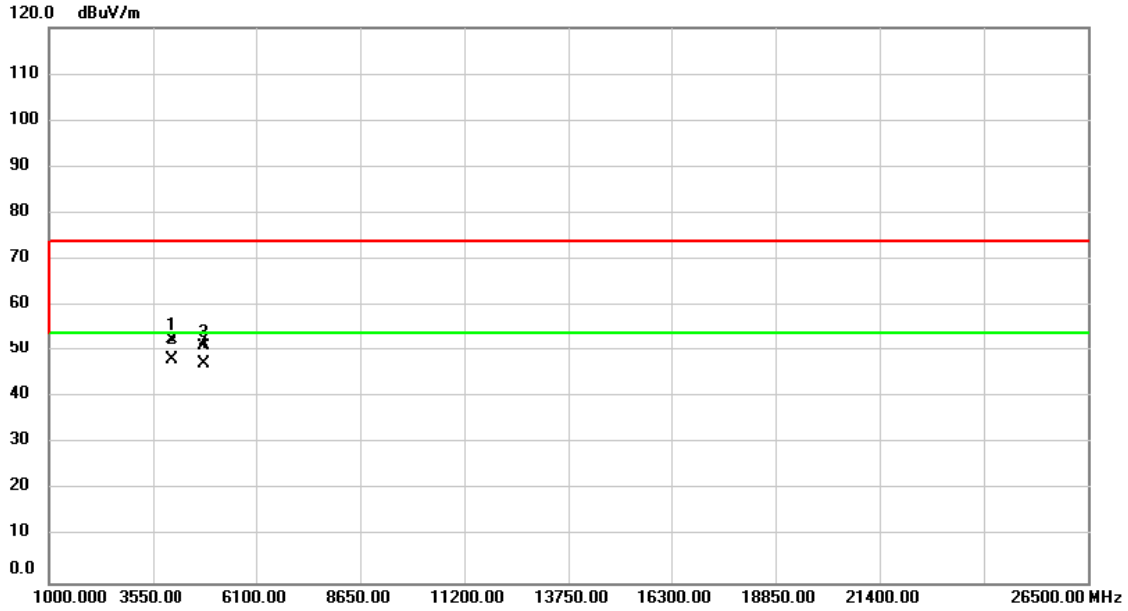

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4020.000	65.67	-13.07	52.60	74.00	-21.40	peak	
2	*	4020.000	61.18	-13.07	48.11	54.00	-5.89	AVG	
3		4824.000	62.68	-11.48	51.20	74.00	-22.80	peak	
4		4824.000	58.70	-11.48	47.22	54.00	-6.78	AVG	

Test Mode	TX B MODE _2437 MHz_ Antenna Type: PCB	Polarization	Vertical
-----------	--	--------------	----------


**Orthogonal Axis: Z**

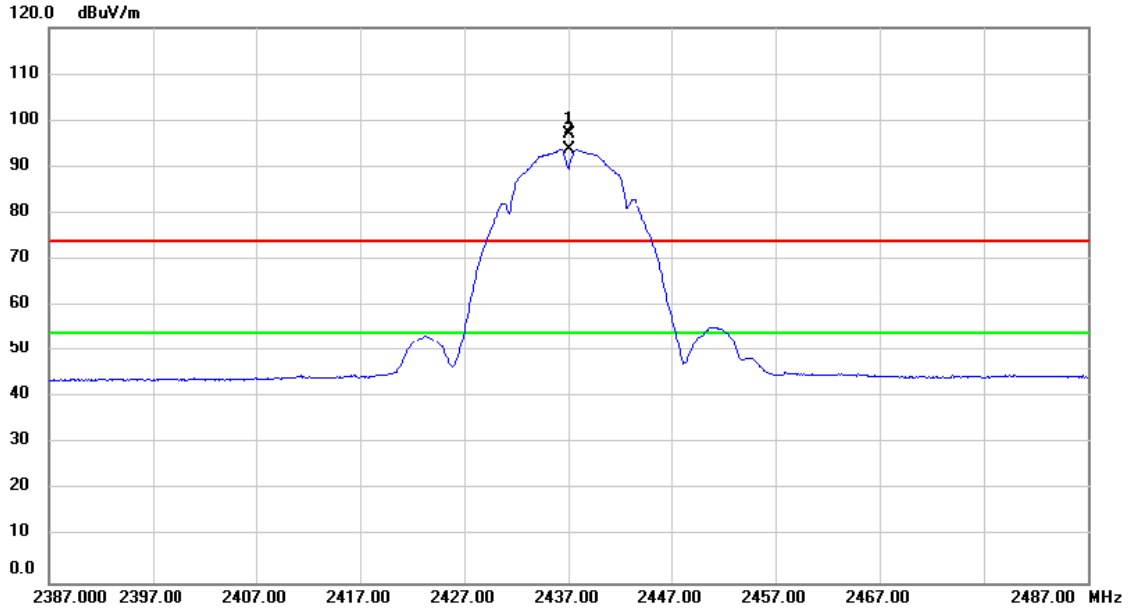

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2437.000	66.07	31.01	97.08	74.00	23.08	peak	No Limit
2	*	2437.000	62.80	31.01	93.81	54.00	39.81	AVG	No Limit

Test Mode	TX B MODE _2437 MHz_ Antenna Type: PCB	Polarization	Vertical
-----------	--	--------------	----------


**Orthogonal Axis: Z**

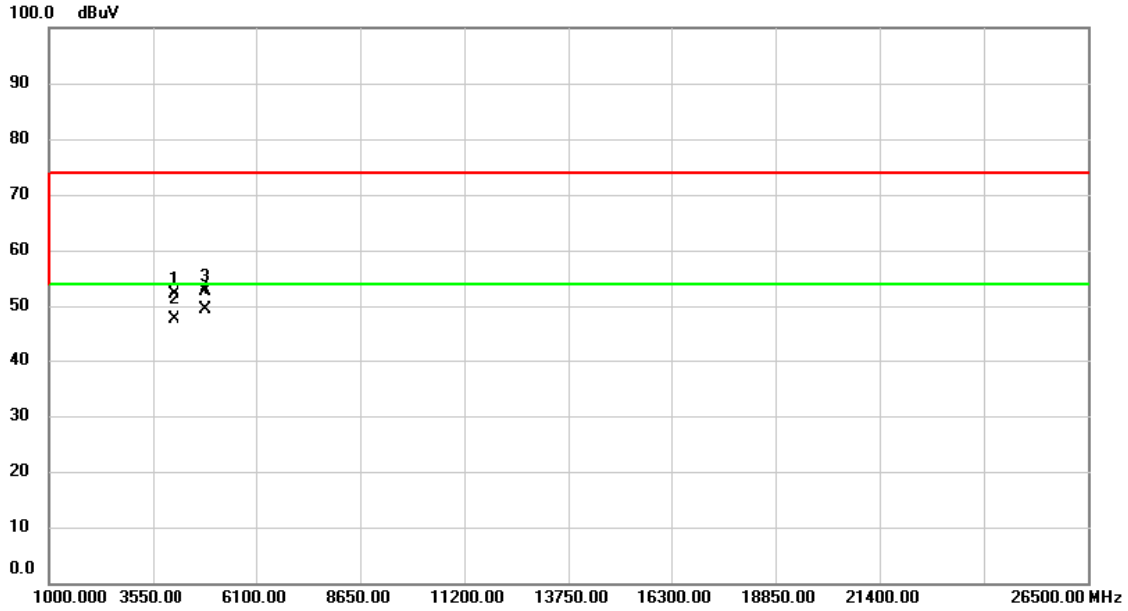

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4061.000	65.19	-12.96	52.23	74.00	-21.77	peak	
2		4061.000	60.56	-12.96	47.60	54.00	-6.40	AVG	
3		4874.000	64.12	-11.42	52.70	74.00	-21.30	peak	
4	*	4874.000	60.84	-11.42	49.42	54.00	-4.58	AVG	

Test Mode	TX B MODE _2437 MHz_ Antenna Type: PCB	Polarization	Horizontal
-----------	--	--------------	------------


**Orthogonal Axis: Z**

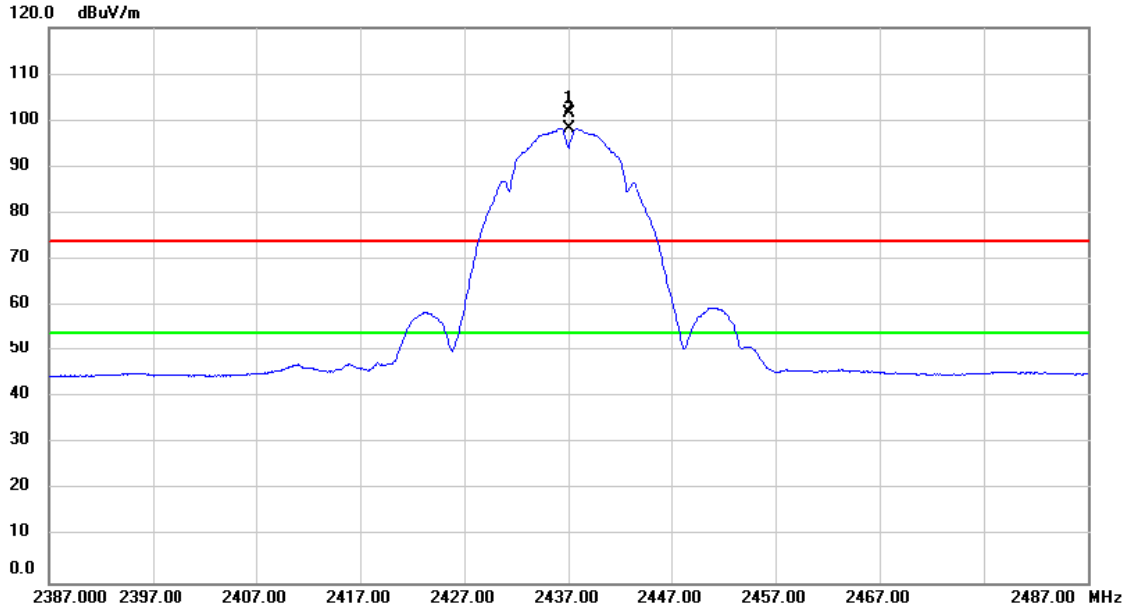

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2437.000	70.50	31.01	101.51	74.00	27.51	peak	No Limit
2	*	2437.000	67.34	31.01	98.35	54.00	44.35	AVG	No Limit

Test Mode	TX B MODE _2437 MHz_ Antenna Type: PCB	Polarization	Horizontal
-----------	--	--------------	------------

**Orthogonal Axis: Z**

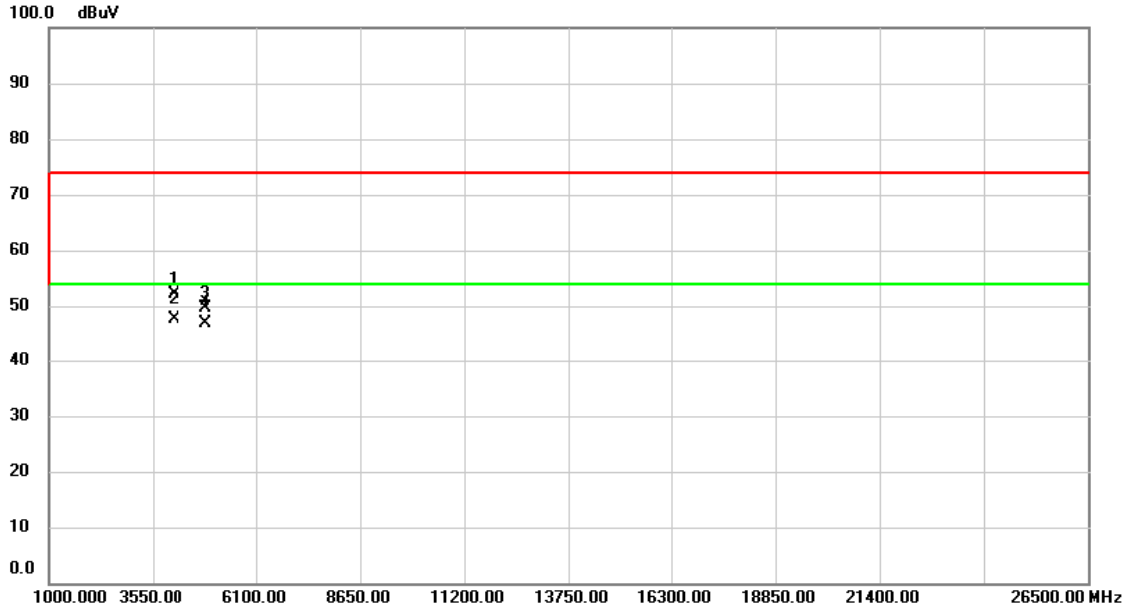


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4061.000	65.12	-12.96	52.16	74.00	-21.84	peak	
2	*	4061.000	60.48	-12.96	47.52	54.00	-6.48	AVG	
3		4874.000	61.05	-11.42	49.63	74.00	-24.37	peak	
4		4874.000	58.20	-11.42	46.78	54.00	-7.22	AVG	



Test Mode	TX B MODE _2462 MHz_ Antenna Type: PCB	Polarization	Vertical
-----------	--	--------------	----------


**Orthogonal Axis: Z**

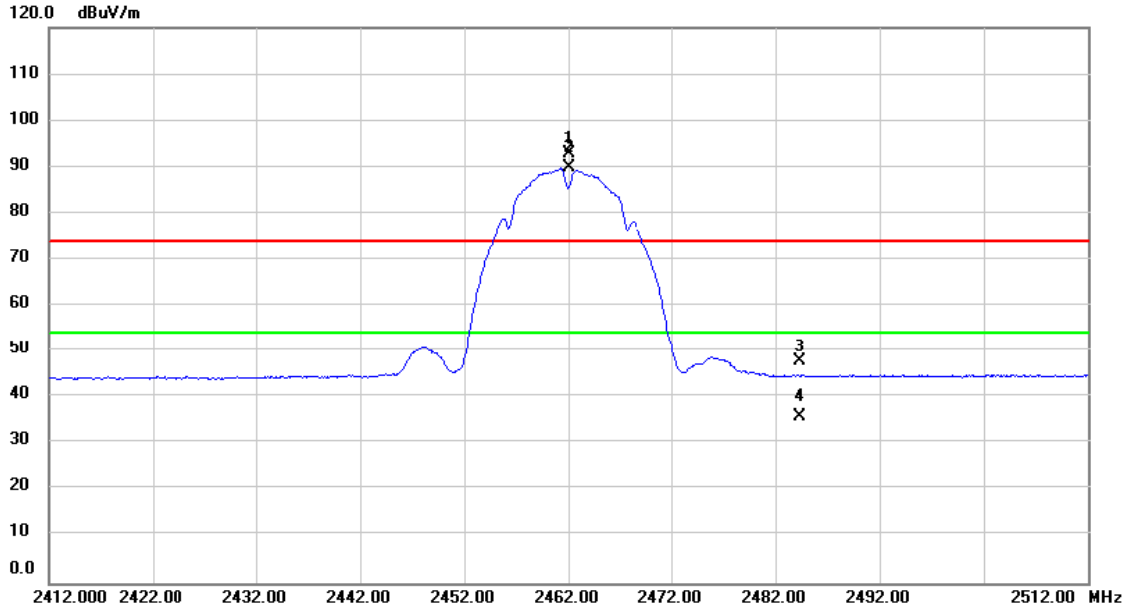

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2462.000	61.80	31.09	92.89	74.00	18.89	peak	No Limit
2	*	2462.000	58.62	31.09	89.71	54.00	35.71	AVG	No Limit
3		2484.292	16.64	31.18	47.82	74.00	-26.18	peak	
4		2484.292	4.77	31.18	35.95	54.00	-18.05	AVG	

Test Mode	TX B MODE _2462 MHz_ Antenna Type: PCB	Polarization	Vertical
-----------	--	--------------	----------


**Orthogonal Axis: Z**

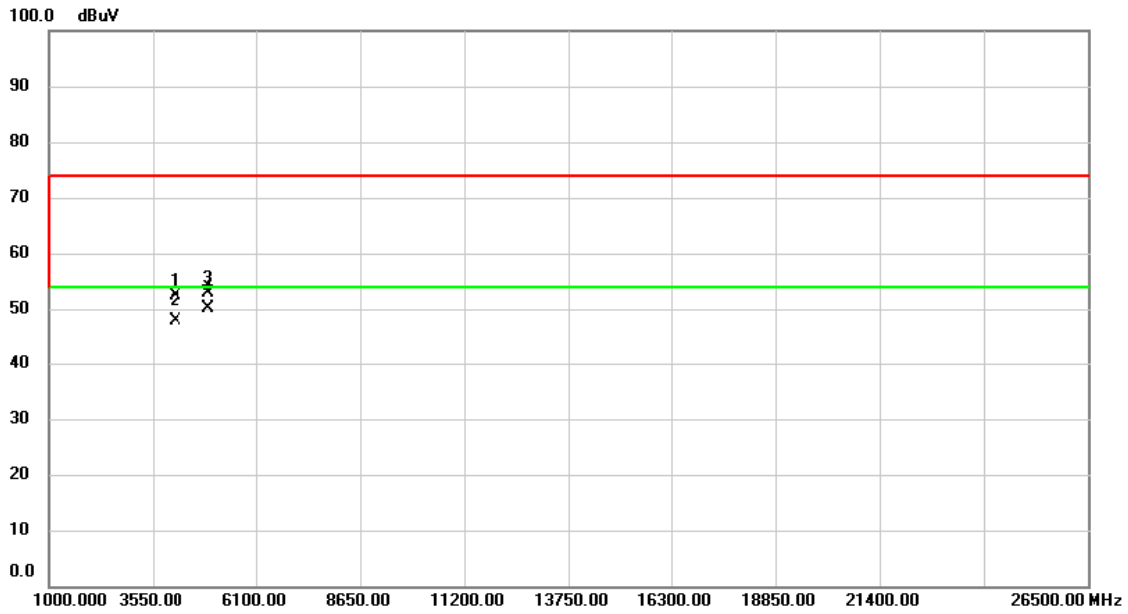

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4103.000	65.30	-12.84	52.46	74.00	-21.54	peak	
2		4103.000	60.79	-12.84	47.95	54.00	-6.05	AVG	
3		4924.000	64.31	-11.37	52.94	74.00	-21.06	peak	
4	*	4924.000	61.49	-11.37	50.12	54.00	-3.88	AVG	

Test Mode	TX B MODE _2462 MHz_ Antenna Type: PCB	Polarization	Horizontal
-----------	--	--------------	------------


**Orthogonal Axis: Z**

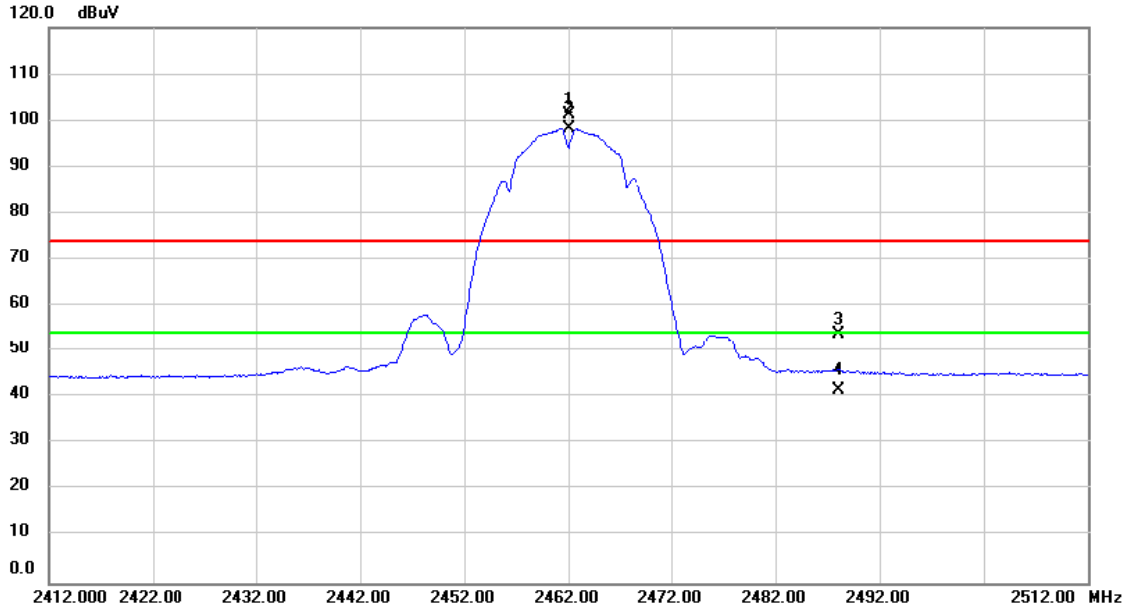

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	X	2462.000	70.13	31.09	101.22	74.00	27.22	peak	No Limit
2	*	2462.000	67.22	31.09	98.31	54.00	44.31	AVG	No Limit
3		2488.082	22.61	31.19	53.80	74.00	-20.20	peak	
4		2488.082	10.34	31.19	41.53	54.00	-12.47	AVG	

Test Mode	TX B MODE _2462 MHz_ Antenna Type: PCB	Polarization	Horizontal
-----------	--	--------------	------------


**Orthogonal Axis: Z**

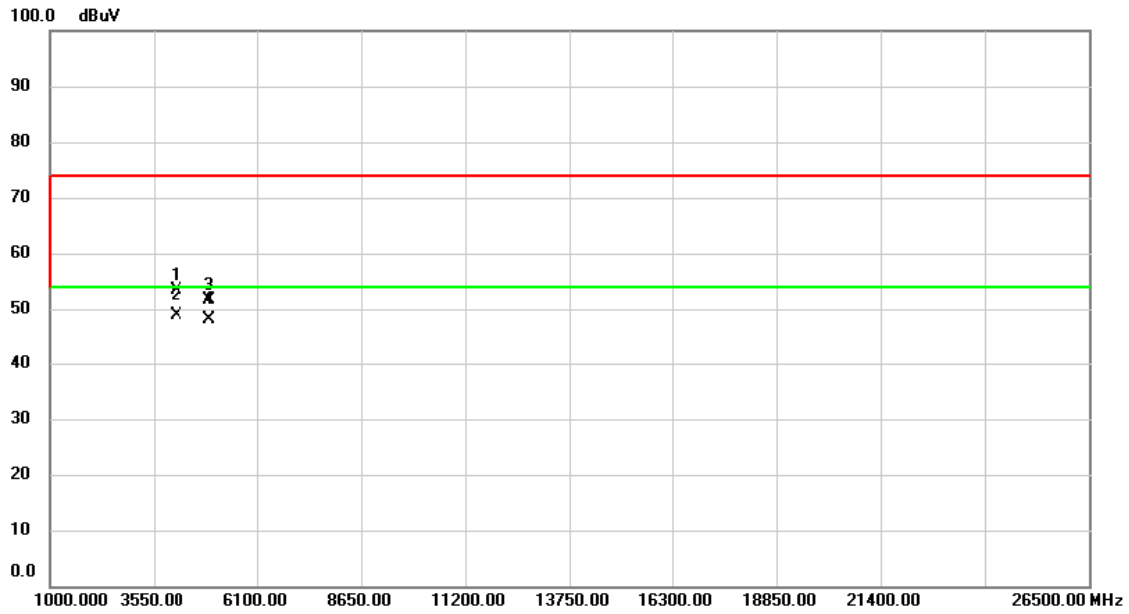

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4103.000	66.27	-12.84	53.43	74.00	-20.57	peak	
2	*	4103.000	61.70	-12.84	48.86	54.00	-5.14	AVG	
3		4924.000	63.01	-11.37	51.64	74.00	-22.36	peak	
4		4924.000	59.43	-11.37	48.06	54.00	-5.94	AVG	

Test Mode	TX G MODE _2412 MHz_ Antenna Type: PCB	Polarization	Vertical
-----------	--	--------------	----------


**Orthogonal Axis: Z**

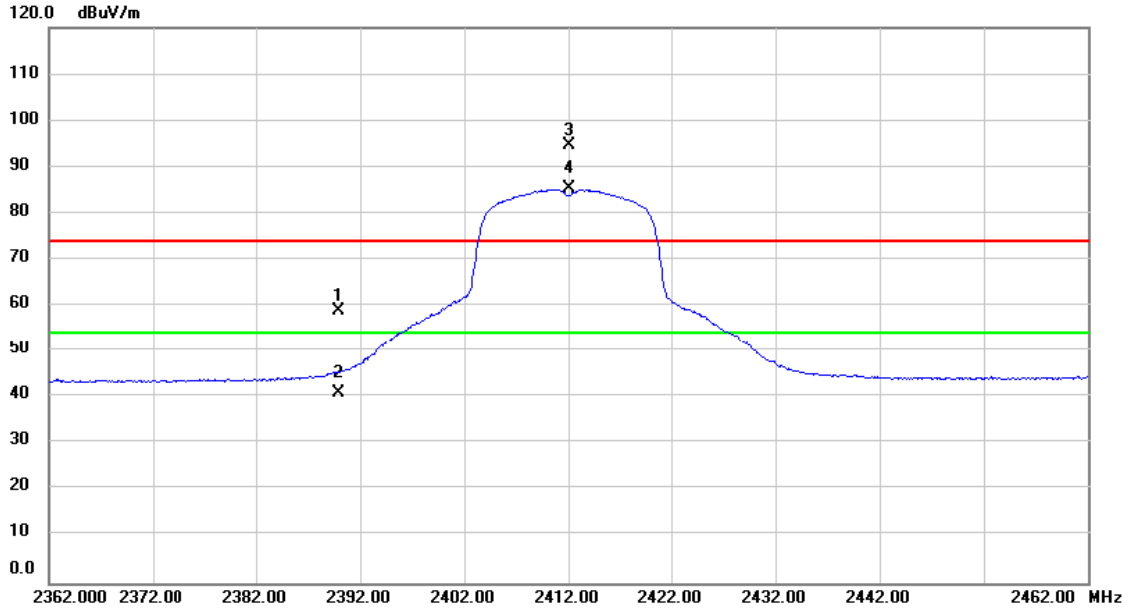

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2389.903	28.05	30.84	58.89	74.00	-15.11	peak	
2		2389.903	10.18	30.84	41.02	54.00	-12.98	AVG	
3	X	2412.000	63.72	30.92	94.64	74.00	20.64	peak	No Limit
4	*	2412.000	54.30	30.92	85.22	54.00	31.22	AVG	No Limit

Test Mode	TX G MODE _2412 MHz_ Antenna Type: PCB	Polarization	Vertical
-----------	--	--------------	----------


Orthogonal Axis: Z

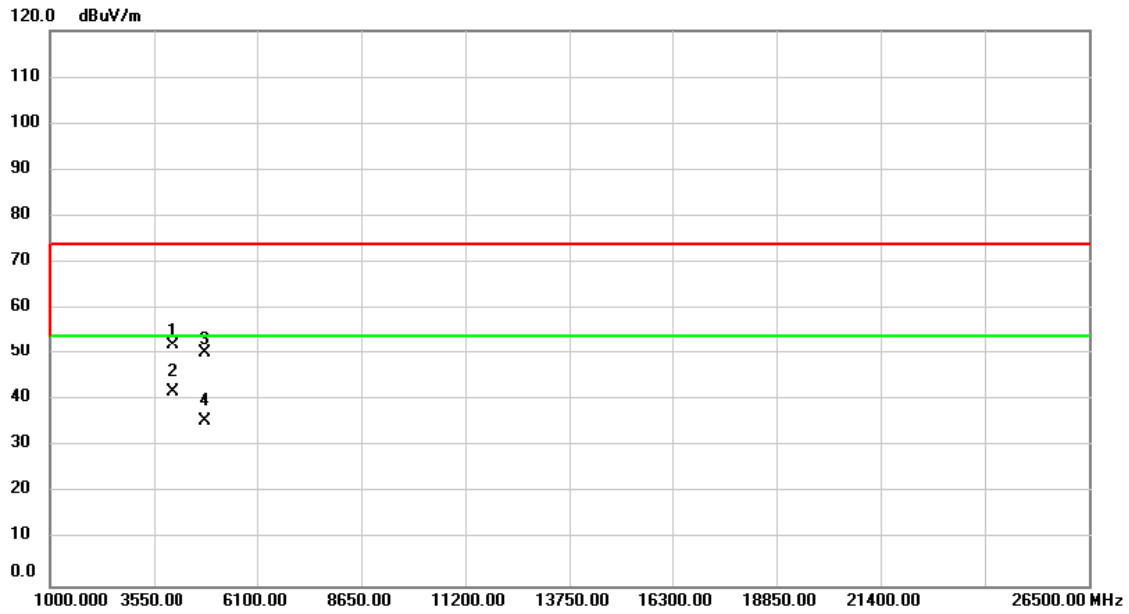

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4020.000	65.15	-13.07	52.08	74.00	-21.92	peak	
2	*	4020.000	55.05	-13.07	41.98	54.00	-12.02	AVG	
3		4824.000	61.60	-11.48	50.12	74.00	-23.88	peak	
4		4824.000	47.14	-11.48	35.66	54.00	-18.34	AVG	

Test Mode	TX G MODE _2412 MHz_ Antenna Type: PCB	Polarization	Horizontal
-----------	--	--------------	------------


Orthogonal Axis: Z

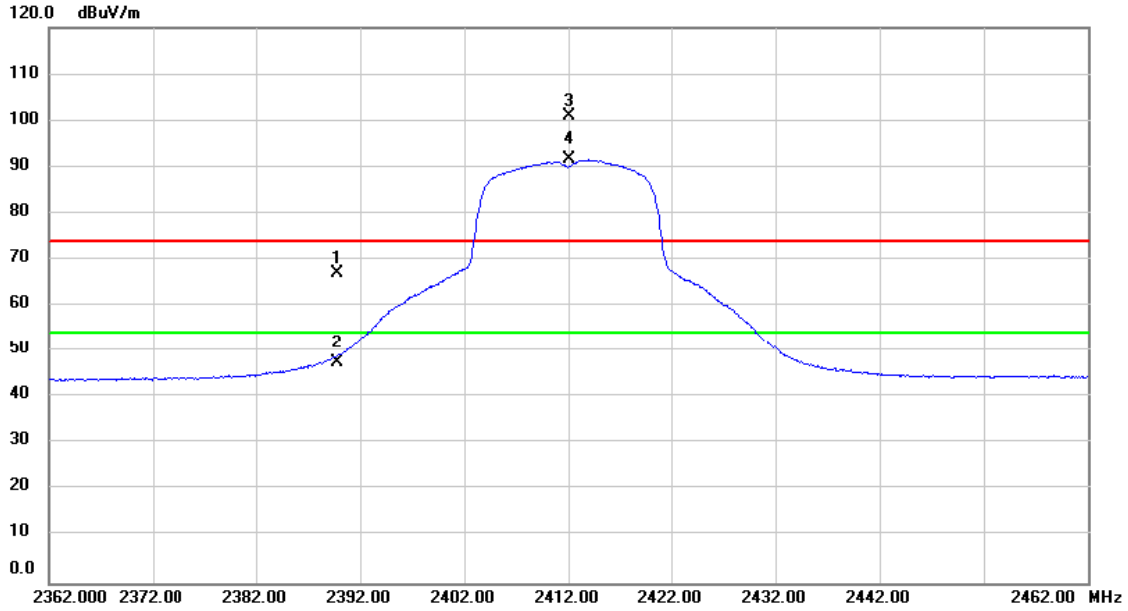

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2389.769	36.27	30.84	67.11	74.00	-6.89	peak	
2		2389.769	16.77	30.84	47.61	54.00	-6.39	AVG	
3	X	2412.000	70.00	30.92	100.92	74.00	26.92	peak	No Limit
4	*	2412.000	60.63	30.92	91.55	54.00	37.55	AVG	No Limit

Test Mode	TX G MODE _2412 MHz_ Antenna Type: PCB	Polarization	Horizontal
-----------	--	--------------	------------

**Orthogonal Axis: Z**

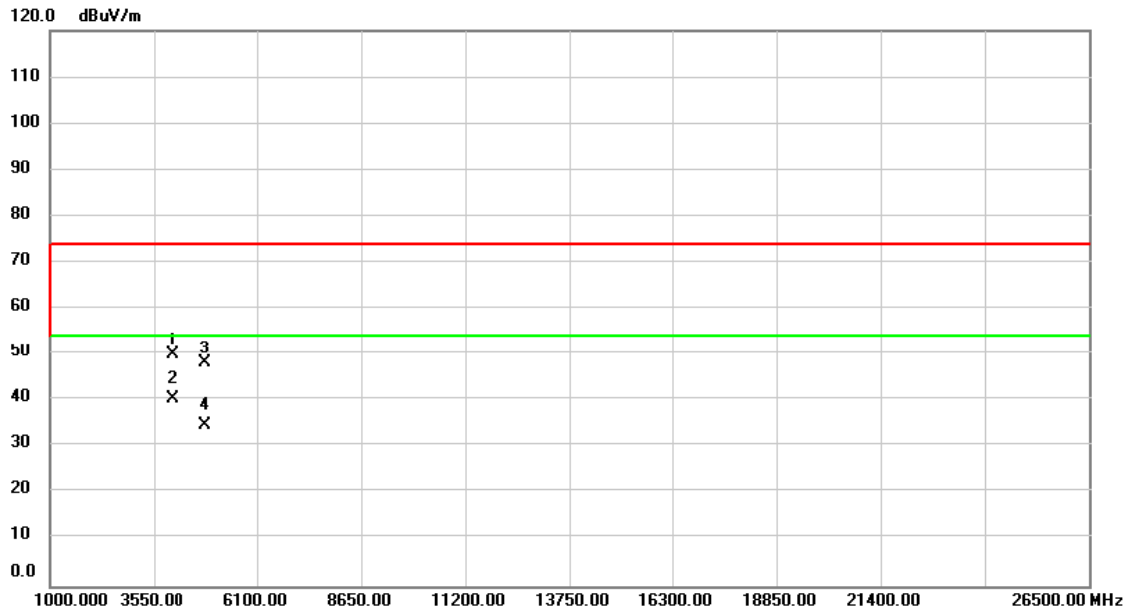


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4020.000	63.01	-13.07	49.94	74.00	-24.06	peak	
2	*	4020.000	53.51	-13.07	40.44	54.00	-13.56	AVG	
3		4824.000	59.70	-11.48	48.22	74.00	-25.78	peak	
4		4824.000	46.22	-11.48	34.74	54.00	-19.26	AVG	



Test Mode	TX G MODE _2437 MHz_ Antenna Type: PCB	Polarization	Vertical
-----------	--	--------------	----------


**Orthogonal Axis: Z**

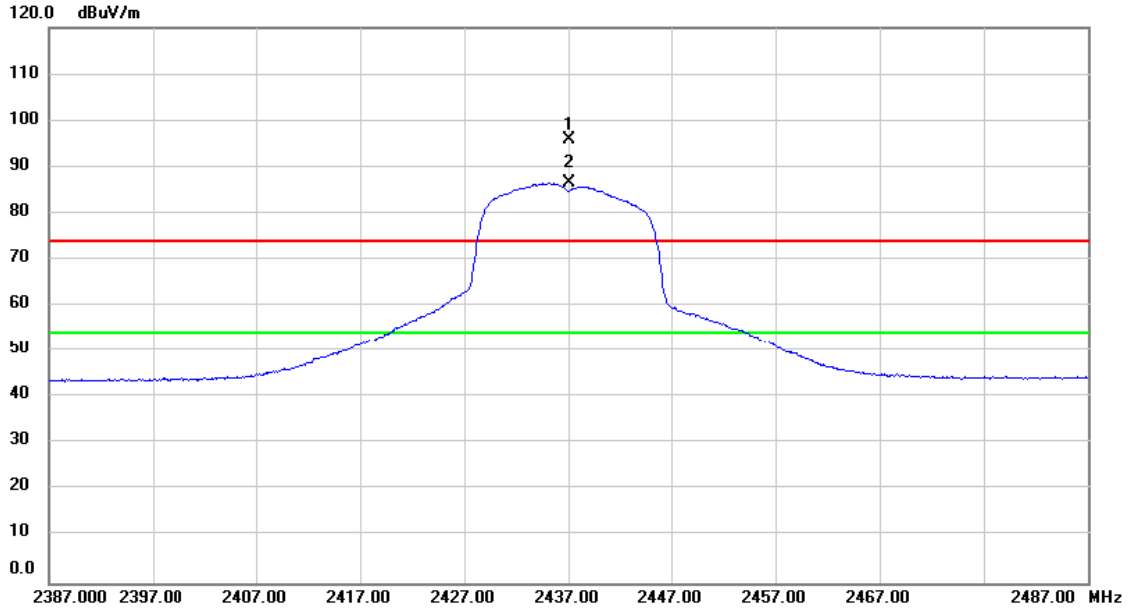

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2437.000	64.97	31.01	95.98	74.00	21.98	peak	No Limit
2	*	2437.000	55.39	31.01	86.40	54.00	32.40	AVG	No Limit

Test Mode	TX G MODE _2437 MHz_ Antenna Type: PCB	Polarization	Vertical
-----------	--	--------------	----------


**Orthogonal Axis: Z**

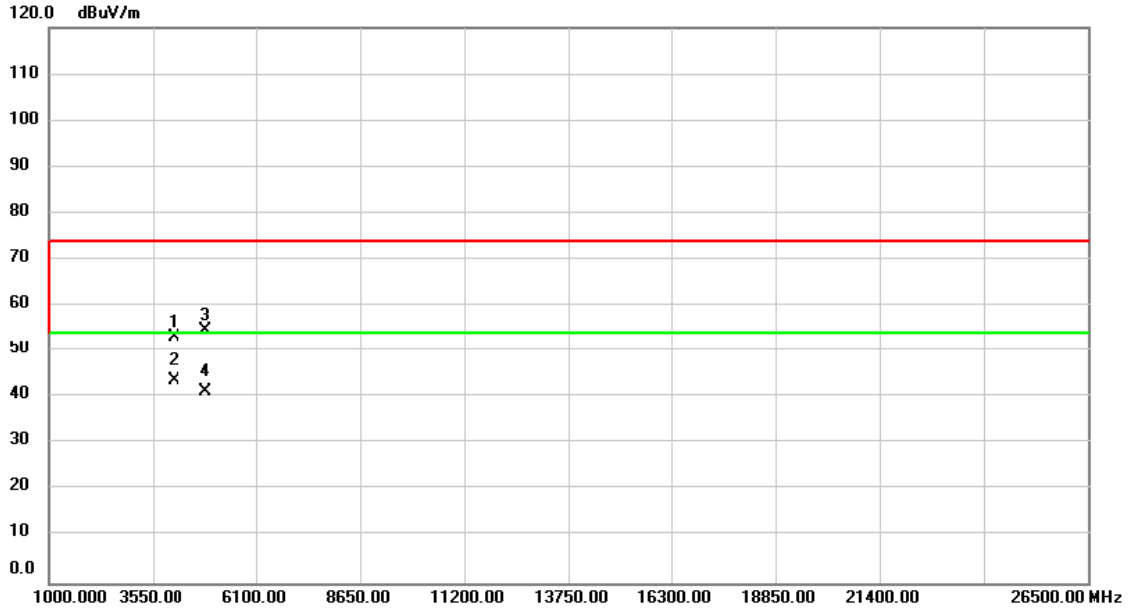

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4061.000	66.35	-12.96	53.39	74.00	-20.61	peak	
2	*	4061.000	56.64	-12.96	43.68	54.00	-10.32	AVG	
3		4874.000	66.16	-11.42	54.74	74.00	-19.26	peak	
4		4874.000	52.56	-11.42	41.14	54.00	-12.86	AVG	

Test Mode	TX G MODE _2437 MHz_ Antenna Type: PCB	Polarization	Horizontal
-----------	--	--------------	------------


**Orthogonal Axis: Z**

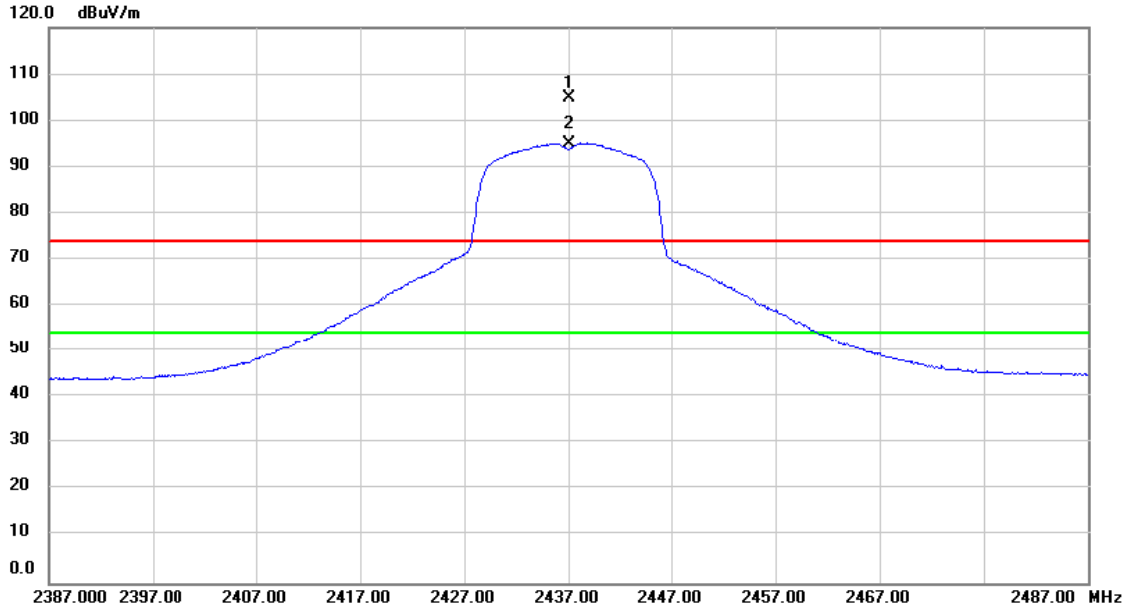

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2437.000	73.82	31.01	104.83	74.00	30.83	peak	No Limit
2	*	2437.000	64.09	31.01	95.10	54.00	41.10	AVG	No Limit

Test Mode	TX G MODE _2437 MHz_ Antenna Type: PCB	Polarization	Horizontal
-----------	--	--------------	------------


**Orthogonal Axis: Z**

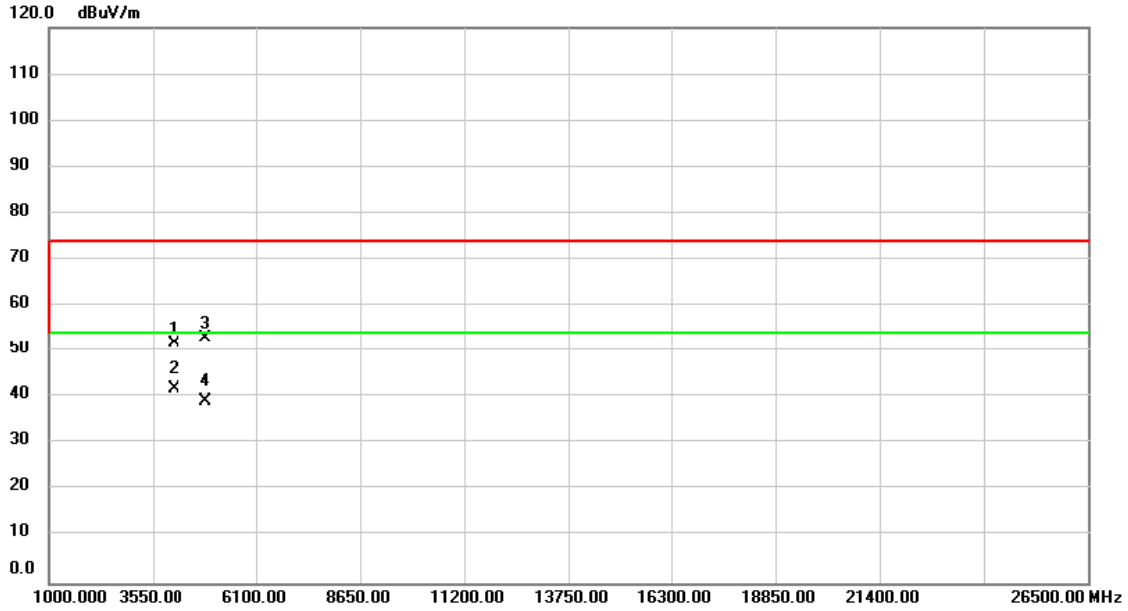

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4061.000	64.73	-12.96	51.77	74.00	-22.23	peak	
2	*	4061.000	54.94	-12.96	41.98	54.00	-12.02	AVG	
3		4874.000	64.35	-11.42	52.93	74.00	-21.07	peak	
4		4874.000	50.45	-11.42	39.03	54.00	-14.97	AVG	

Test Mode	TX G MODE _2462 MHz_ Antenna Type: PCB	Polarization	Vertical
-----------	--	--------------	----------


Orthogonal Axis: Z

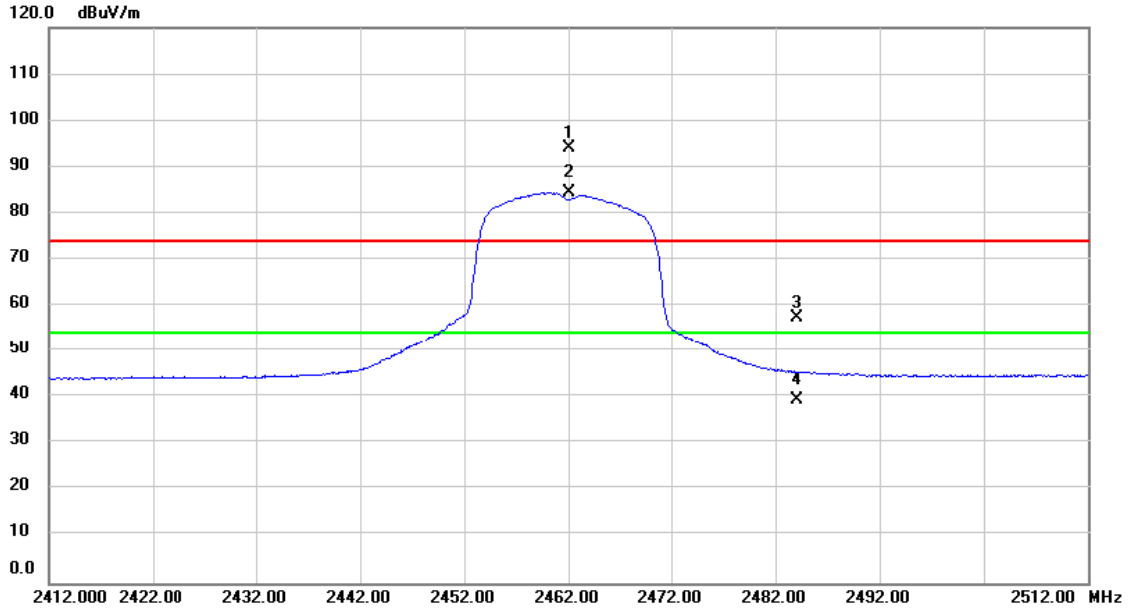

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2462.000	63.02	31.09	94.11	74.00	20.11	peak	No Limit
2	*	2462.000	53.27	31.09	84.36	54.00	30.36	AVG	No Limit
3		2484.030	26.24	31.18	57.42	74.00	-16.58	peak	
4		2484.030	8.25	31.18	39.43	54.00	-14.57	AVG	

Test Mode	TX G MODE _2462 MHz_ Antenna Type: PCB	Polarization	Vertical
-----------	--	--------------	----------


**Orthogonal Axis: Z**

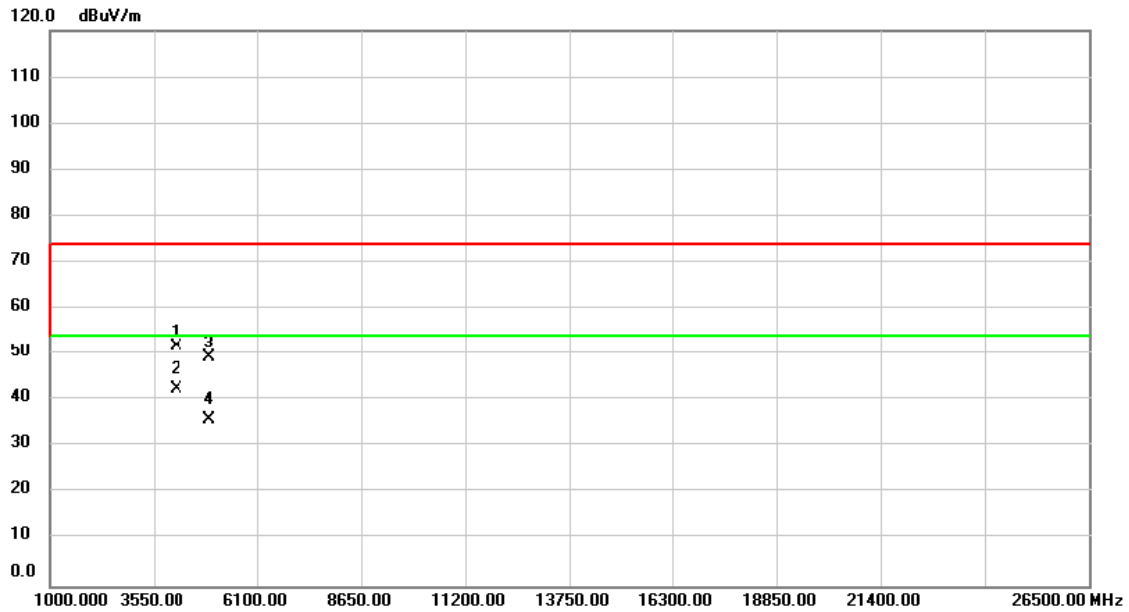

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4103.000	64.51	-12.84	51.67	74.00	-22.33	peak	
2	*	4103.000	55.19	-12.84	42.35	54.00	-11.65	AVG	
3		4924.000	60.81	-11.37	49.44	74.00	-24.56	peak	
4		4924.000	47.17	-11.37	35.80	54.00	-18.20	AVG	

Test Mode	TX G MODE _2462 MHz_ Antenna Type: PCB	Polarization	Horizontal
-----------	--	--------------	------------


**Orthogonal Axis: Z**

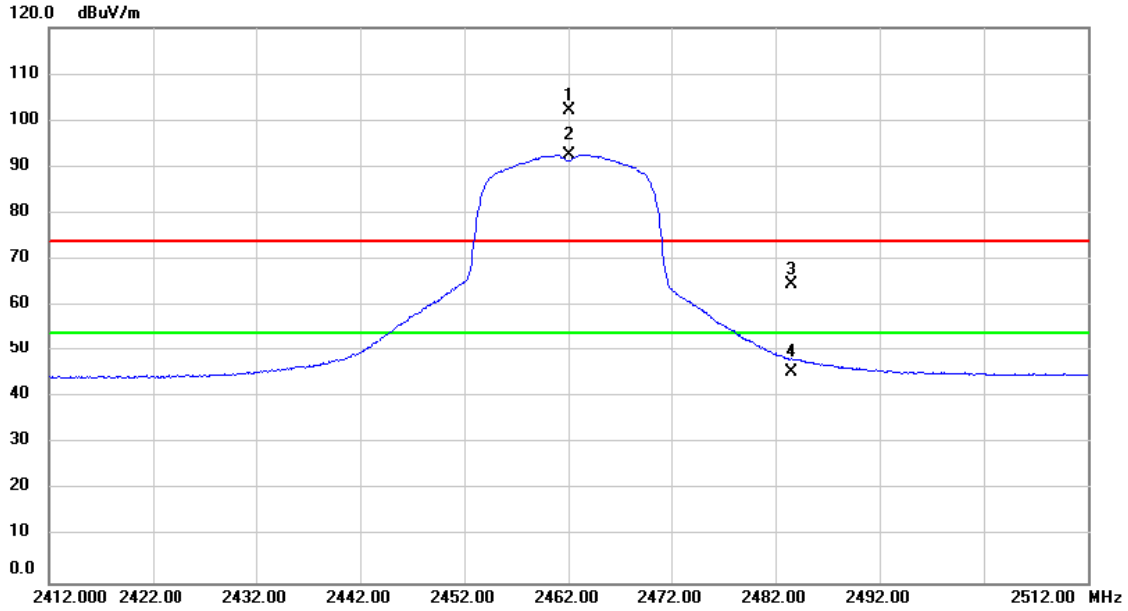

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2462.000	71.16	31.09	102.25	74.00	28.25	peak	No Limit
2	*	2462.000	61.55	31.09	92.64	54.00	38.64	AVG	No Limit
3		2483.533	33.52	31.17	64.69	74.00	-9.31	peak	
4		2483.533	14.27	31.17	45.44	54.00	-8.56	AVG	

Test Mode	TX G MODE _2462 MHz_ Antenna Type: PCB	Polarization	Horizontal
-----------	--	--------------	------------

**Orthogonal Axis: Z**

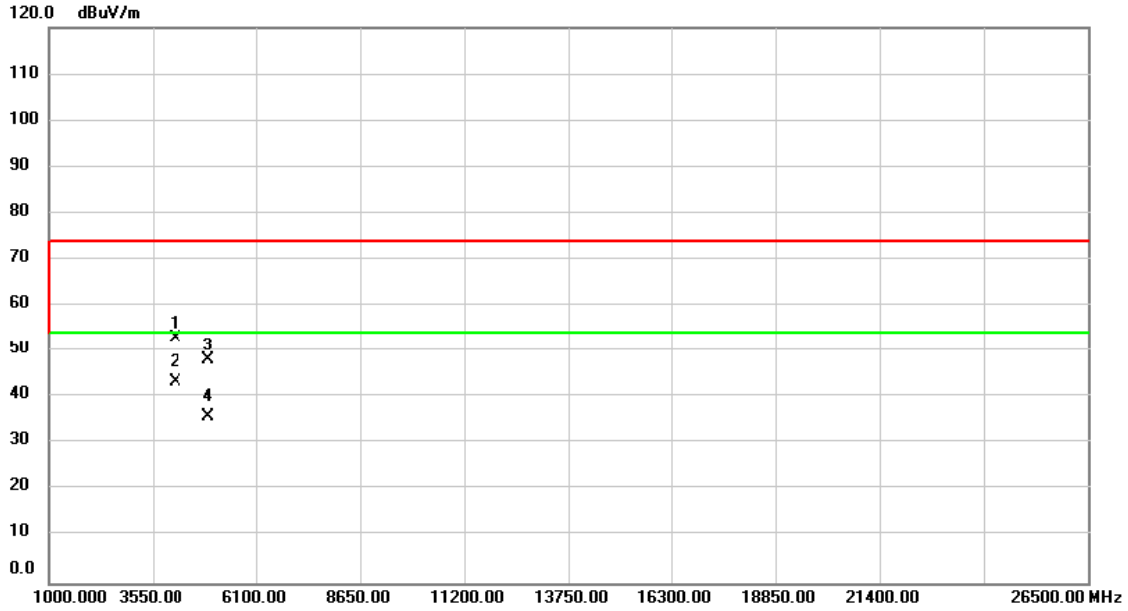


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4103.000	65.92	-12.84	53.08	74.00	-20.92	peak	
2	*	4103.000	56.23	-12.84	43.39	54.00	-10.61	AVG	
3		4924.000	59.60	-11.37	48.23	74.00	-25.77	peak	
4		4924.000	47.27	-11.37	35.90	54.00	-18.10	AVG	



Test Mode	TX N-20M MODE 2412MHz_ Antenna Type: PCB	Polarization	Vertical
-----------	--	--------------	----------


Orthogonal Axis: Z

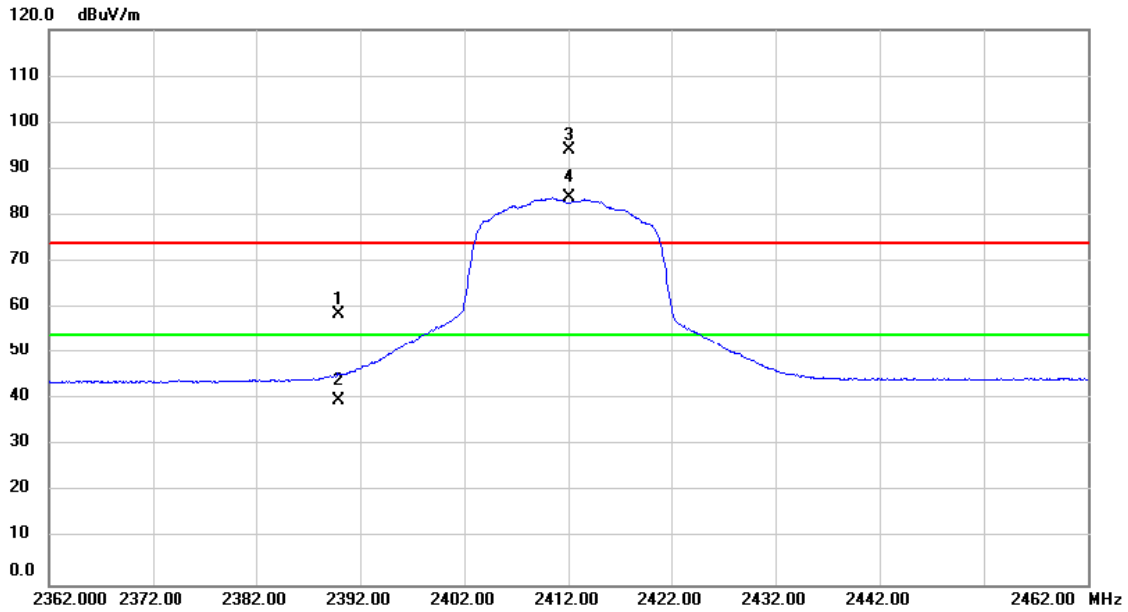

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2389.889	27.93	30.84	58.77	74.00	-15.23	peak	
2		2389.889	8.93	30.84	39.77	54.00	-14.23	AVG	
3	X	2412.000	62.98	30.92	93.90	74.00	19.90	peak	No Limit
4	*	2412.000	52.90	30.92	83.82	54.00	29.82	AVG	No Limit

Test Mode	TX N-20M MODE 2412MHz_ Antenna Type: PCB	Polarization	Vertical
-----------	--	--------------	----------


**Orthogonal Axis: Z**

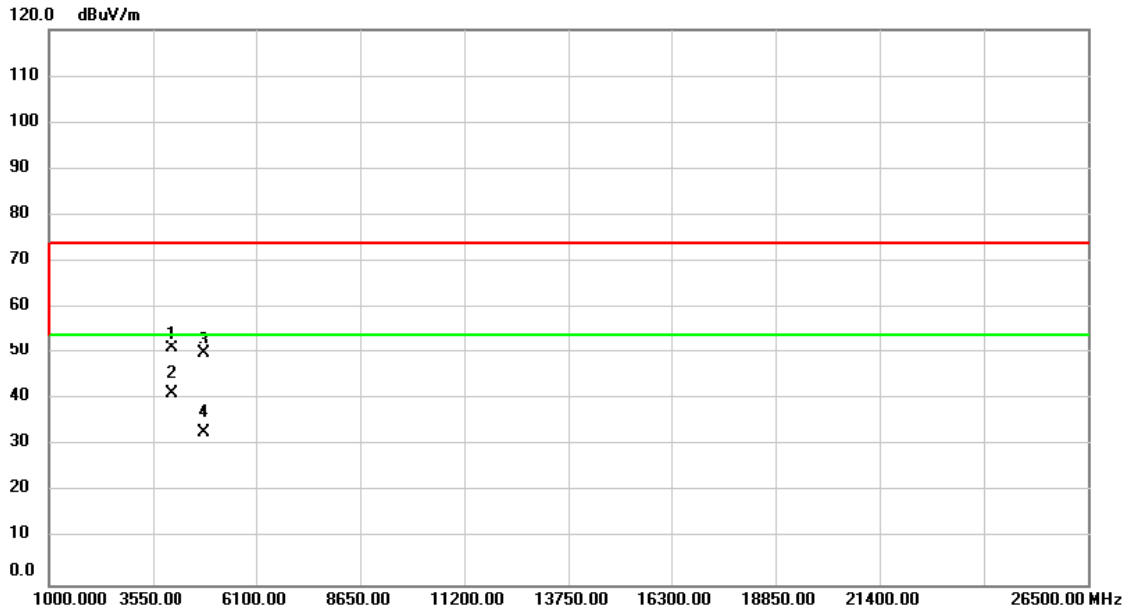

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	4020.000	64.13	-13.07	51.06	74.00	-22.94	peak	
2 *	4020.000	54.20	-13.07	41.13	54.00	-12.87	AVG	
3	4824.000	61.40	-11.48	49.92	74.00	-24.08	peak	
4	4824.000	44.34	-11.48	32.86	54.00	-21.14	AVG	

Test Mode	TX N-20M MODE 2412MHz_ Antenna Type: PCB	Polarization	Horizontal
-----------	--	--------------	------------


**Orthogonal Axis: Z**

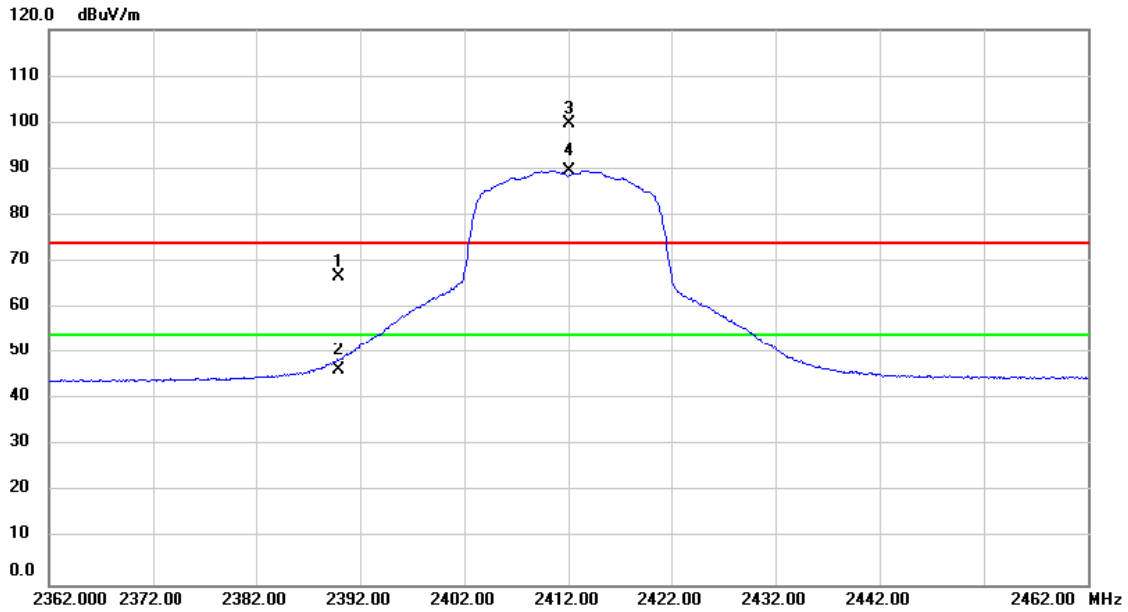

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2389.954	35.93	30.84	66.77	74.00	-7.23	peak	
2		2389.954	15.62	30.84	46.46	54.00	-7.54	AVG	
3	X	2412.000	68.80	30.92	99.72	74.00	25.72	peak	No Limit
4	*	2412.000	58.75	30.92	89.67	54.00	35.67	AVG	No Limit

Test Mode	TX N-20M MODE 2412MHz_ Antenna Type: PCB	Polarization	Horizontal
-----------	--	--------------	------------


**Orthogonal Axis: Z**

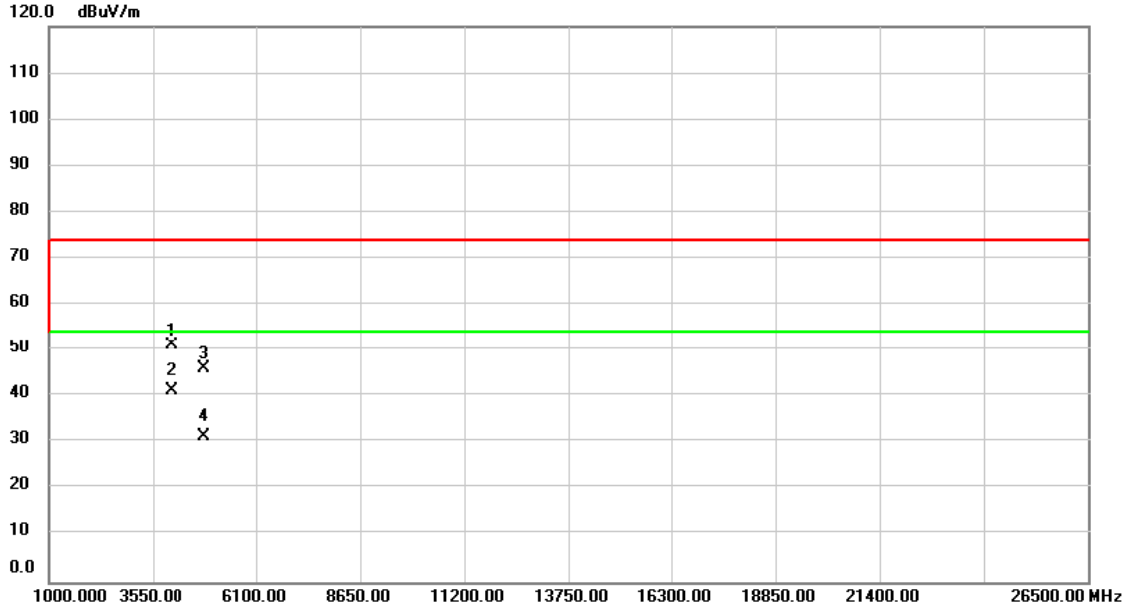

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	4020.000	64.26	-13.07	51.19	74.00	-22.81	peak	
2 *	4020.000	54.20	-13.07	41.13	54.00	-12.87	AVG	
3	4824.000	57.63	-11.48	46.15	74.00	-27.85	peak	
4	4824.000	42.73	-11.48	31.25	54.00	-22.75	AVG	

Test Mode	TX N-20M MODE 2437MHz_ Antenna Type: PCB	Polarization	Vertical
-----------	--	--------------	----------


Orthogonal Axis: Z

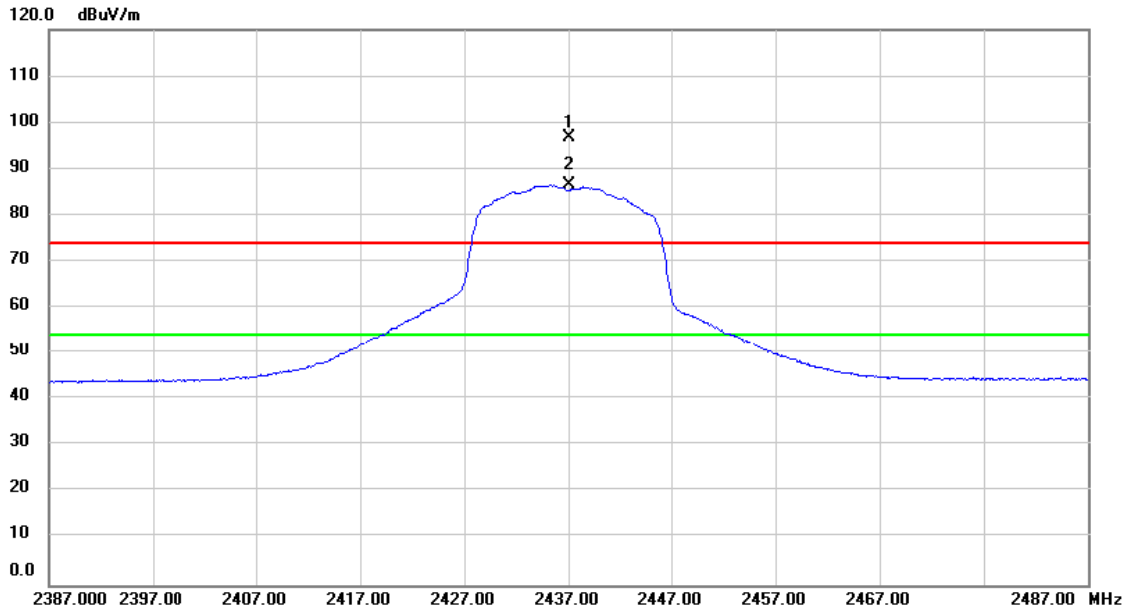

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2437.000	65.69	31.01	96.70	74.00	22.70	peak	No Limit
2	*	2437.000	55.50	31.01	86.51	54.00	32.51	AVG	No Limit

Test Mode	TX N-20M MODE 2437MHz_ Antenna Type: PCB	Polarization	Vertical
-----------	--	--------------	----------


**Orthogonal Axis: Z**

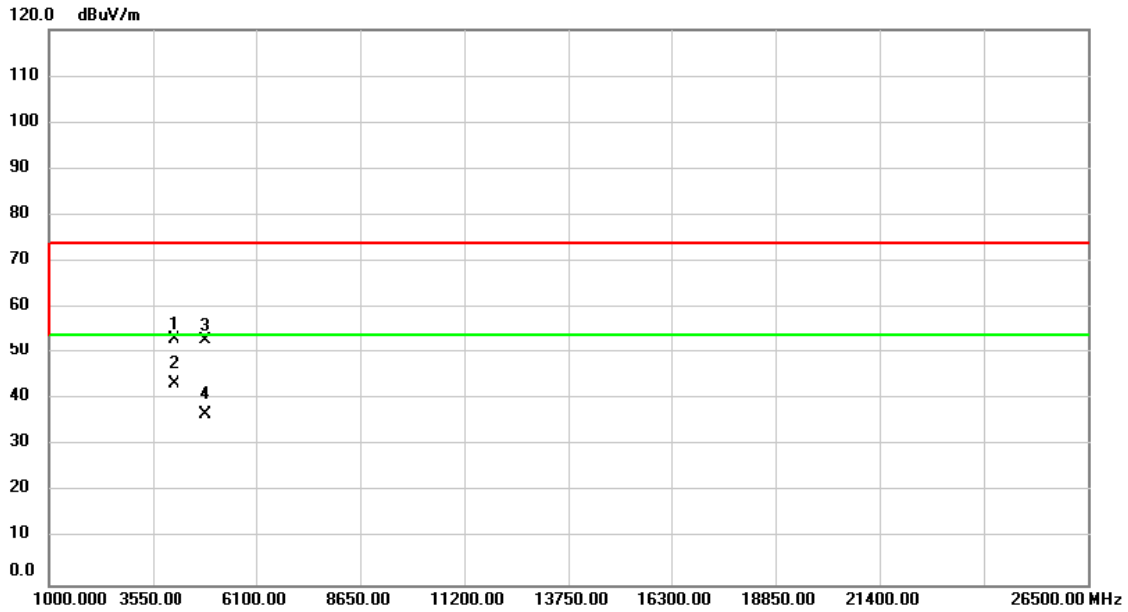

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	4061.000	66.14	-12.96	53.18	74.00	-20.82	peak	
2 *	4061.000	56.25	-12.96	43.29	54.00	-10.71	AVG	
3	4874.000	64.35	-11.42	52.93	74.00	-21.07	peak	
4	4874.000	48.29	-11.42	36.87	54.00	-17.13	AVG	

Test Mode	TX N-20M MODE 2437MHz_ Antenna Type: PCB	Polarization	Horizontal
-----------	--	--------------	------------


**Orthogonal Axis: Z**

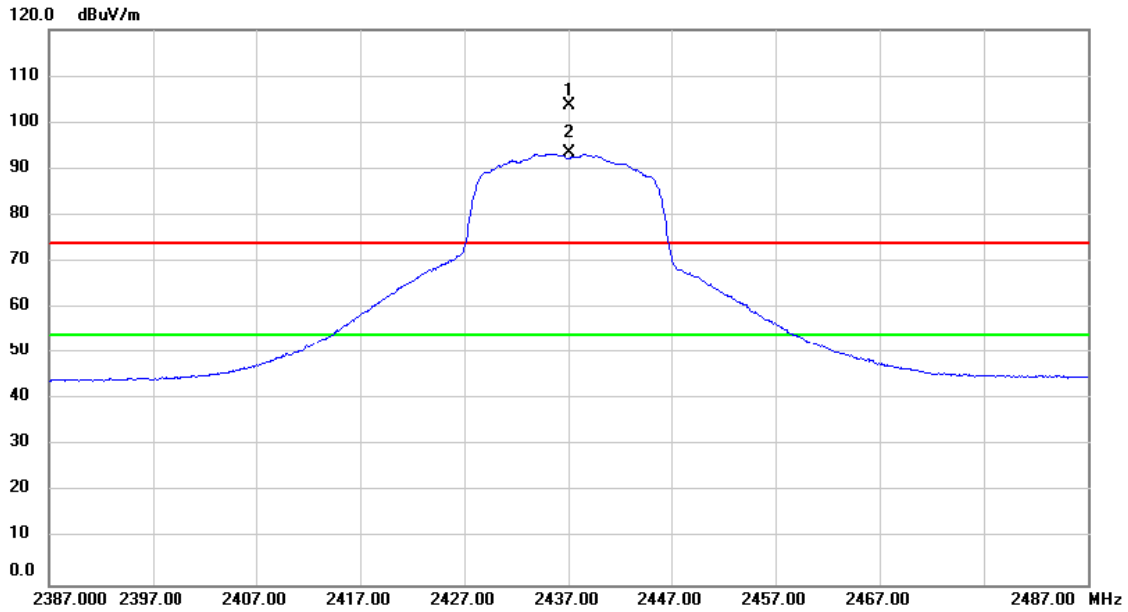

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2437.000	72.69	31.01	103.70	74.00	29.70	peak	No Limit
2	*	2437.000	62.37	31.01	93.38	54.00	39.38	AVG	No Limit

Test Mode	TX N-20M MODE 2437MHz_ Antenna Type: PCB	Polarization	Horizontal
-----------	--	--------------	------------

**Orthogonal Axis: Z**

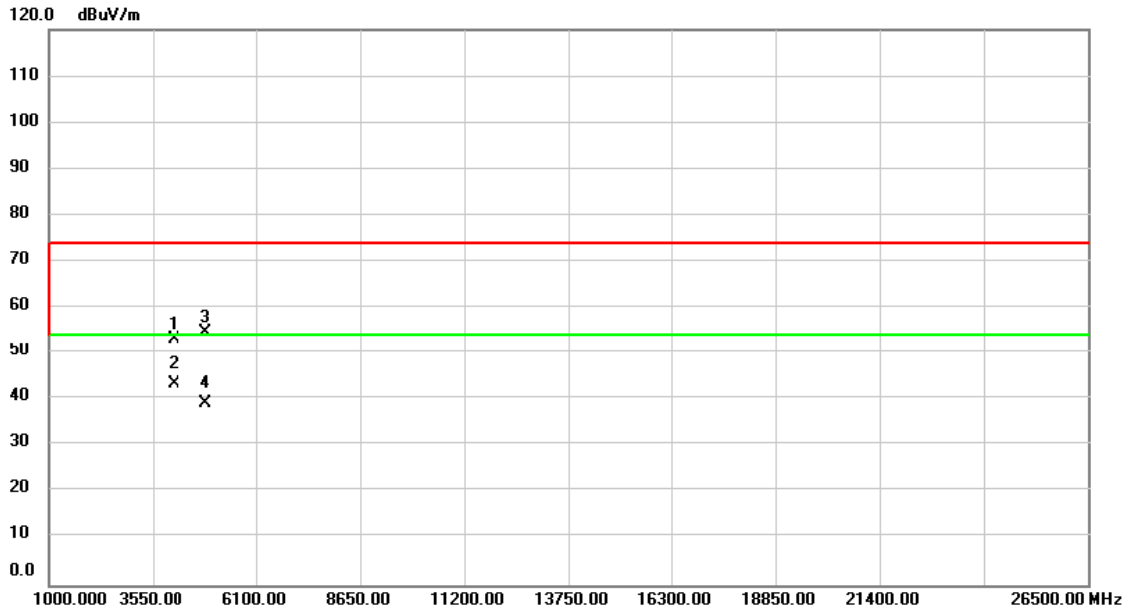


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	4061.000	66.14	-12.96	53.18	74.00	-20.82	peak	
2 *	4061.000	56.28	-12.96	43.32	54.00	-10.68	AVG	
3	4874.000	66.03	-11.42	54.61	74.00	-19.39	peak	
4	4874.000	50.50	-11.42	39.08	54.00	-14.92	AVG	



Test Mode	TX N-20M MODE 2462MHz_ Antenna Type: PCB	Polarization	Vertical
-----------	--	--------------	----------


Orthogonal Axis: Z

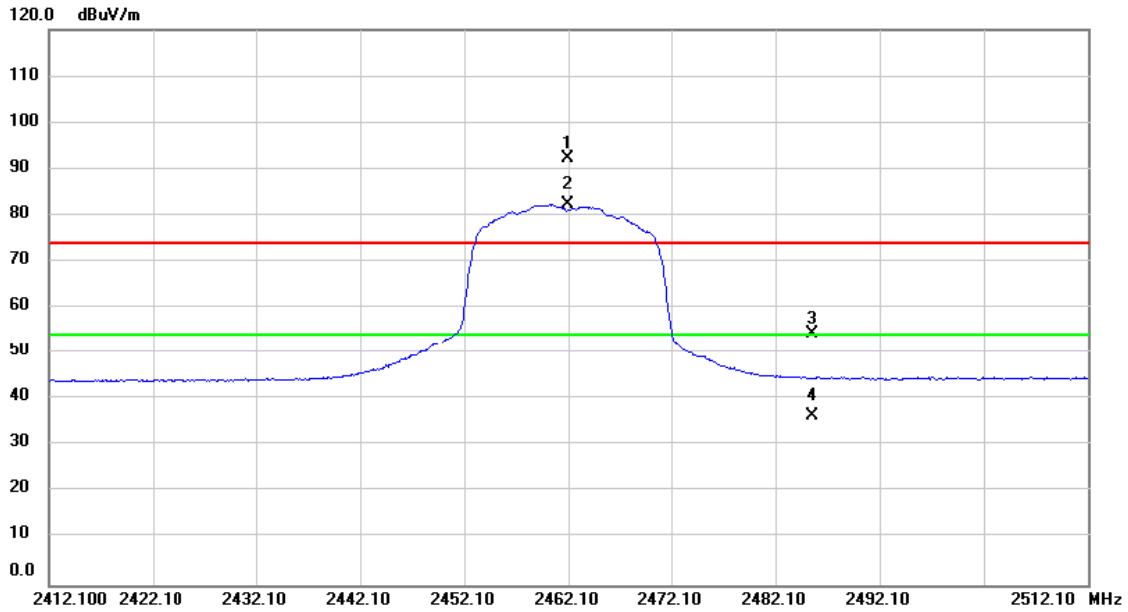

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2462.000	61.24	31.09	92.33	74.00	18.33	peak	No Limit
2	*	2462.000	51.27	31.09	82.36	54.00	28.36	AVG	No Limit
3		2485.614	23.17	31.18	54.35	74.00	-19.65	peak	
4		2485.614	5.34	31.18	36.52	54.00	-17.48	AVG	

Test Mode	TX N-20M MODE 2462MHz_ Antenna Type: PCB	Polarization	Vertical
-----------	--	--------------	----------


**Orthogonal Axis: Z**

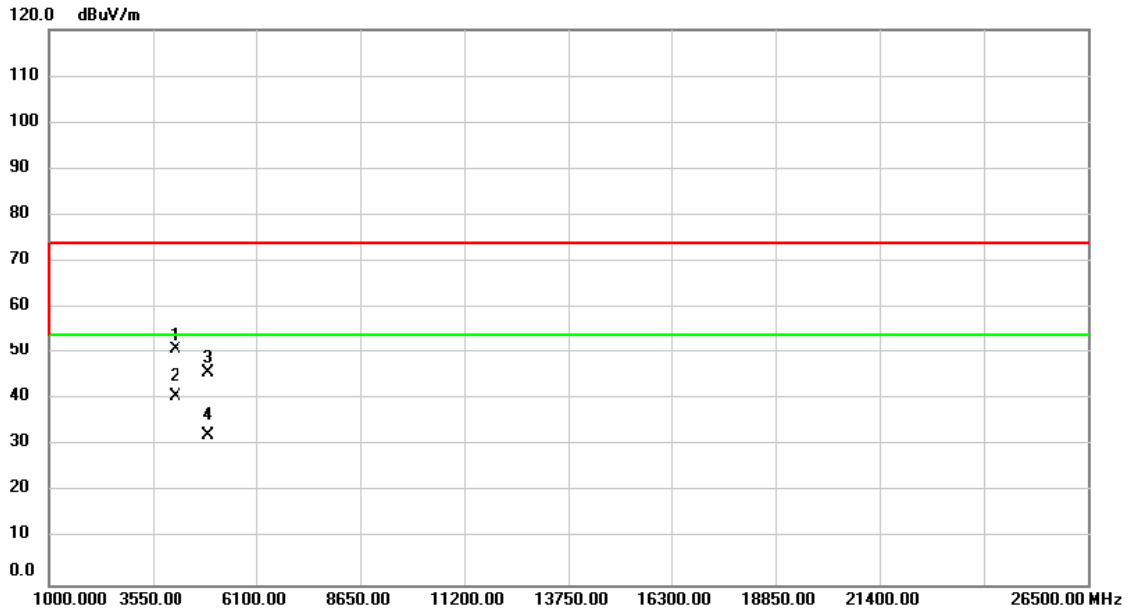

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	4103.000	63.80	-12.84	50.96	74.00	-23.04	peak	
2 *	4103.000	53.35	-12.84	40.51	54.00	-13.49	AVG	
3	4924.000	57.05	-11.37	45.68	74.00	-28.32	peak	
4	4924.000	43.67	-11.37	32.30	54.00	-21.70	AVG	

Test Mode	TX N-20M MODE 2462MHz_ Antenna Type: PCB	Polarization	Horizontal
-----------	--	--------------	------------


Orthogonal Axis: Z

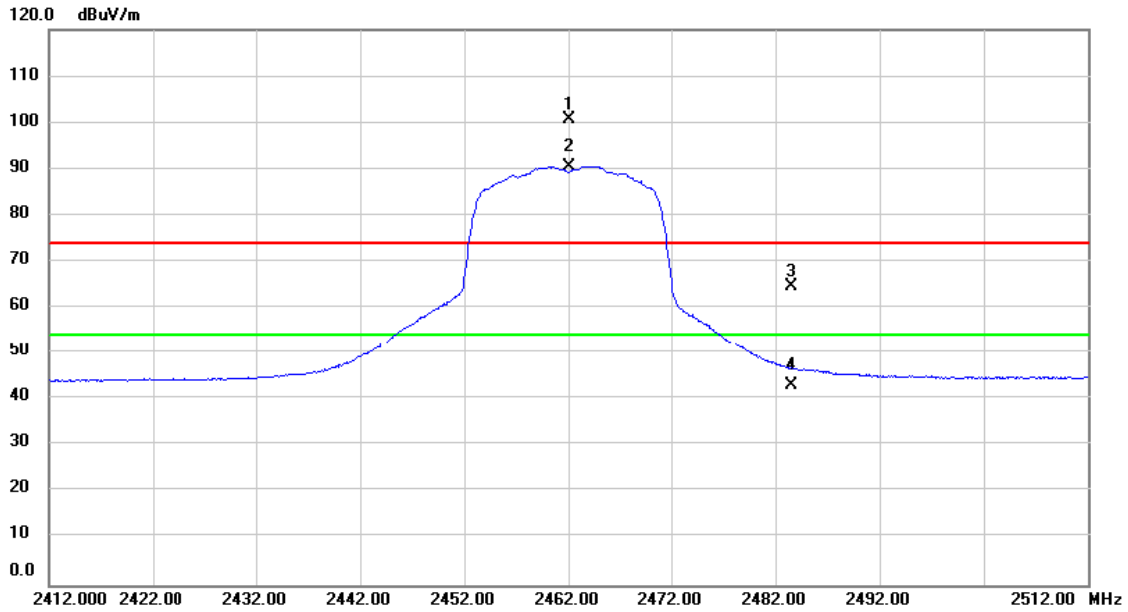

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2462.000	69.65	31.09	100.74	74.00	26.74	peak	No Limit
2	*	2462.000	59.49	31.09	90.58	54.00	36.58	AVG	No Limit
3		2483.523	33.46	31.17	64.63	74.00	-9.37	peak	
4		2483.523	11.98	31.17	43.15	54.00	-10.85	AVG	

Test Mode	TX N-20M MODE 2462MHz_ Antenna Type: PCB	Polarization	Horizontal
-----------	--	--------------	------------


**Orthogonal Axis: Z**

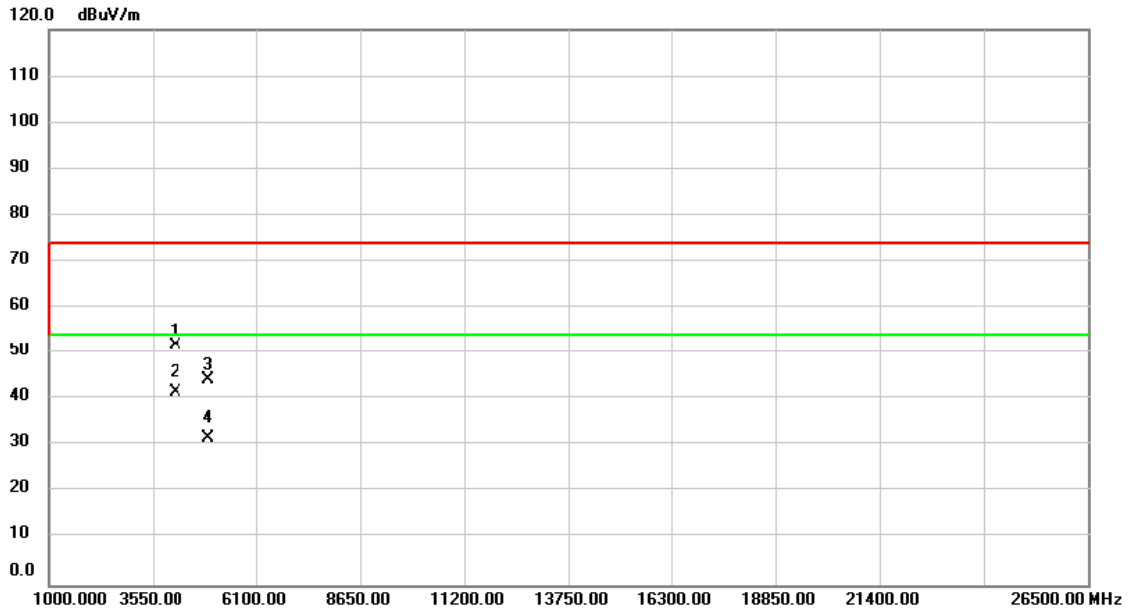

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	4106.000	64.68	-12.84	51.84	74.00	-22.16	peak	
2 *	4106.000	54.42	-12.84	41.58	54.00	-12.42	AVG	
3	4924.000	55.54	-11.37	44.17	74.00	-29.83	peak	
4	4924.000	42.93	-11.37	31.56	54.00	-22.44	AVG	

Test Mode	TX B MODE _2412 MHz_ Antenna Type: Dipole	Polarization	Vertical
-----------	---	--------------	----------


**Orthogonal Axis: Z**

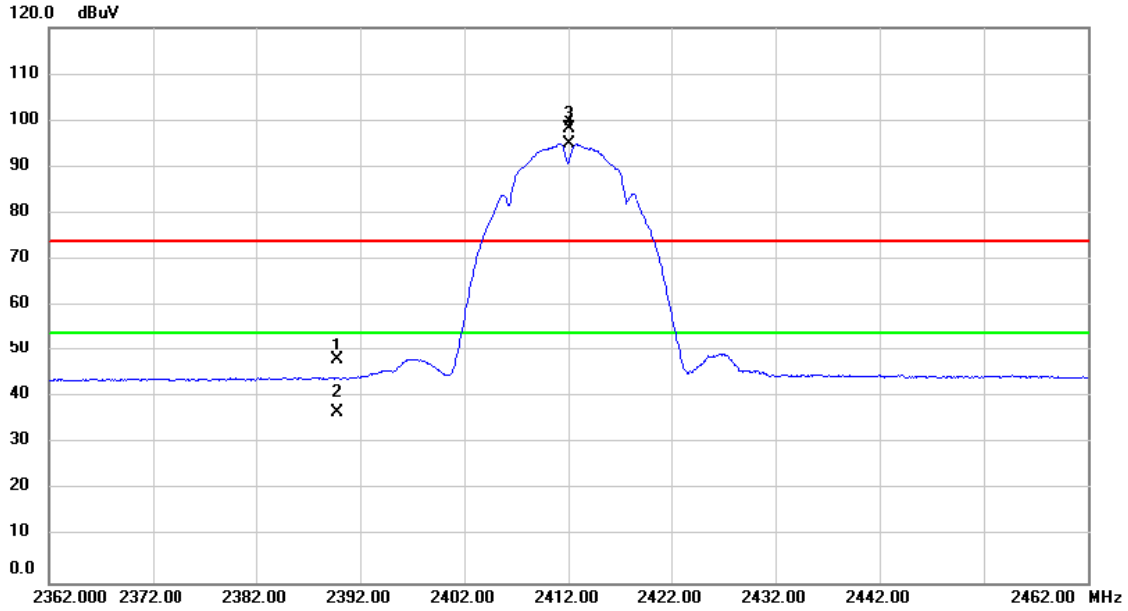

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		2389.748	17.28	30.84	48.12	74.00	-25.88	peak	
2		2389.748	5.82	30.84	36.66	54.00	-17.34	AVG	
3	X	2412.000	67.23	30.92	98.15	74.00	24.15	peak	No Limit
4	*	2412.000	64.09	30.92	95.01	54.00	41.01	AVG	No Limit

Test Mode	TX B MODE _2412 MHz_ Antenna Type: Dipole	Polarization	Vertical
-----------	---	--------------	----------


**Orthogonal Axis: Z**

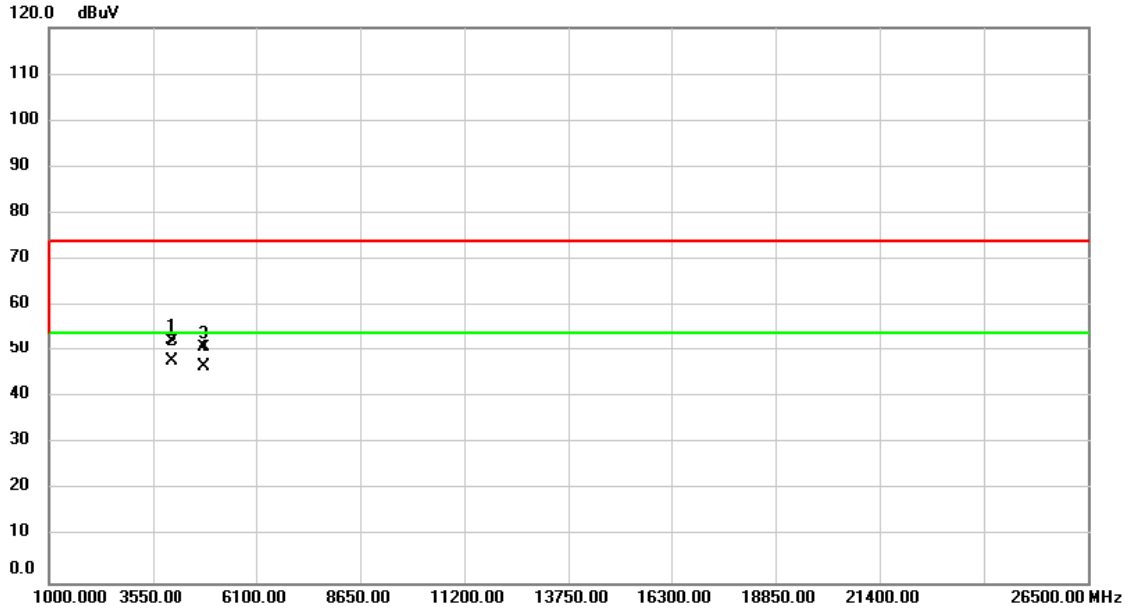

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4020.000	65.41	-13.07	52.34	74.00	-21.66	peak	
2	*	4020.000	60.84	-13.07	47.77	54.00	-6.23	AVG	
3		4824.000	62.31	-11.48	50.83	74.00	-23.17	peak	
4		4824.000	58.28	-11.48	46.80	54.00	-7.20	AVG	

Test Mode	TX B MODE _2412 MHz_ Antenna Type: Dipole	Polarization	Horizontal
-----------	---	--------------	------------


Orthogonal Axis: Z

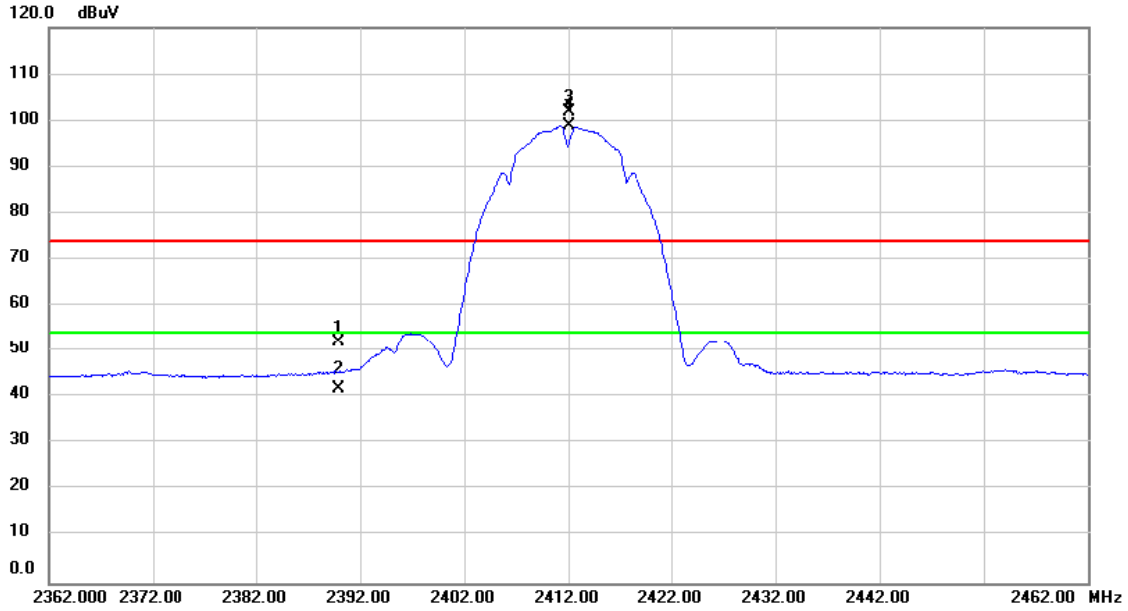

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		2389.916	21.31	30.84	52.15	74.00	-21.85	peak	
2		2389.916	11.11	30.84	41.95	54.00	-12.05	AVG	
3	X	2412.000	71.05	30.92	101.97	74.00	27.97	peak	No Limit
4	*	2412.000	67.87	30.92	98.79	54.00	44.79	AVG	No Limit

Test Mode	TX B MODE _2412 MHz_ Antenna Type: Dipole	Polarization	Horizontal
-----------	---	--------------	------------

Orthogonal Axis: Z

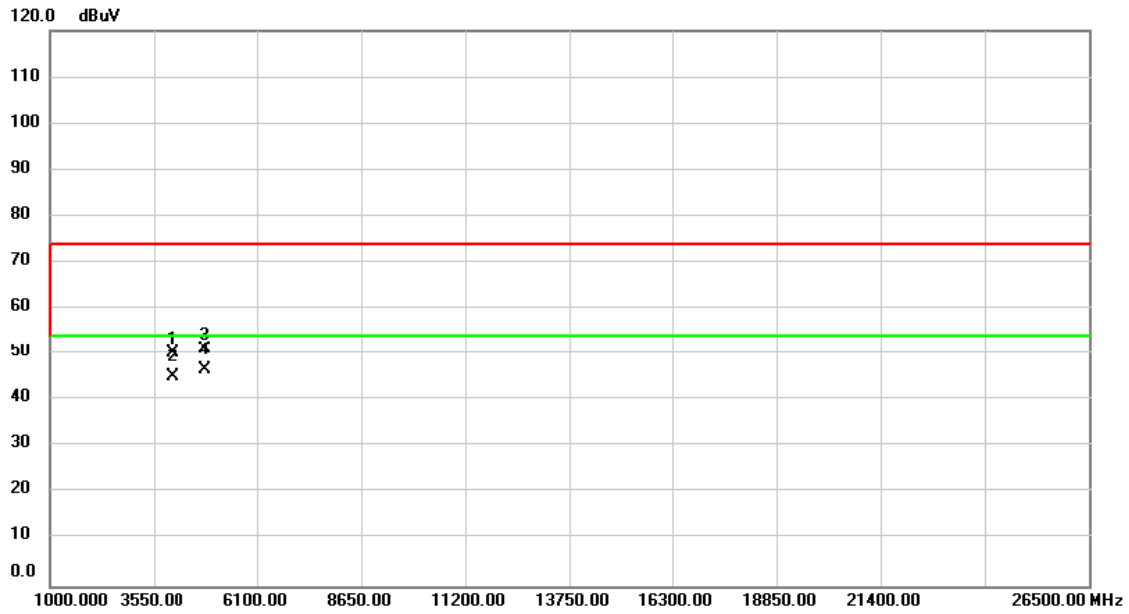


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4020.000	63.25	-13.07	50.18	74.00	-23.82	peak	
2		4020.000	58.31	-13.07	45.24	54.00	-8.76	AVG	
3		4824.000	62.50	-11.48	51.02	74.00	-22.98	peak	
4	*	4824.000	58.13	-11.48	46.65	54.00	-7.35	AVG	



Test Mode	TX B MODE _2437 MHz_ Antenna Type: Dipole	Polarization	Vertical
-----------	---	--------------	----------


**Orthogonal Axis: Z**

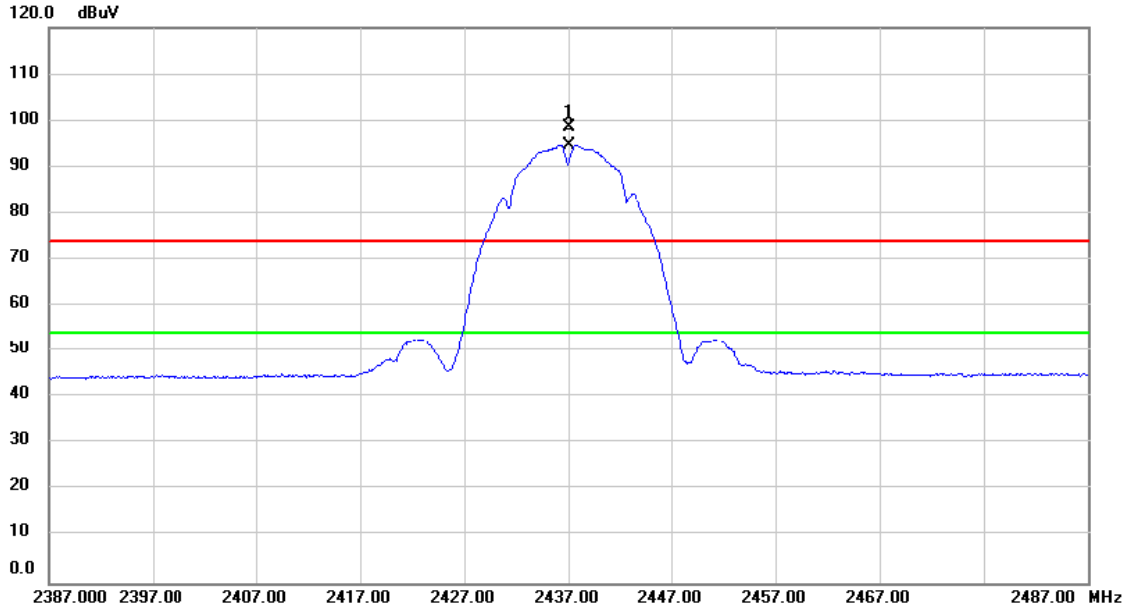

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	X	2437.000	67.39	31.01	98.40	74.00	24.40	peak	No Limit
2	*	2437.000	63.69	31.01	94.70	54.00	40.70	AVG	No Limit

Test Mode	TX B MODE _2437 MHz_ Antenna Type: Dipole	Polarization	Vertical
-----------	---	--------------	----------


**Orthogonal Axis: Z**

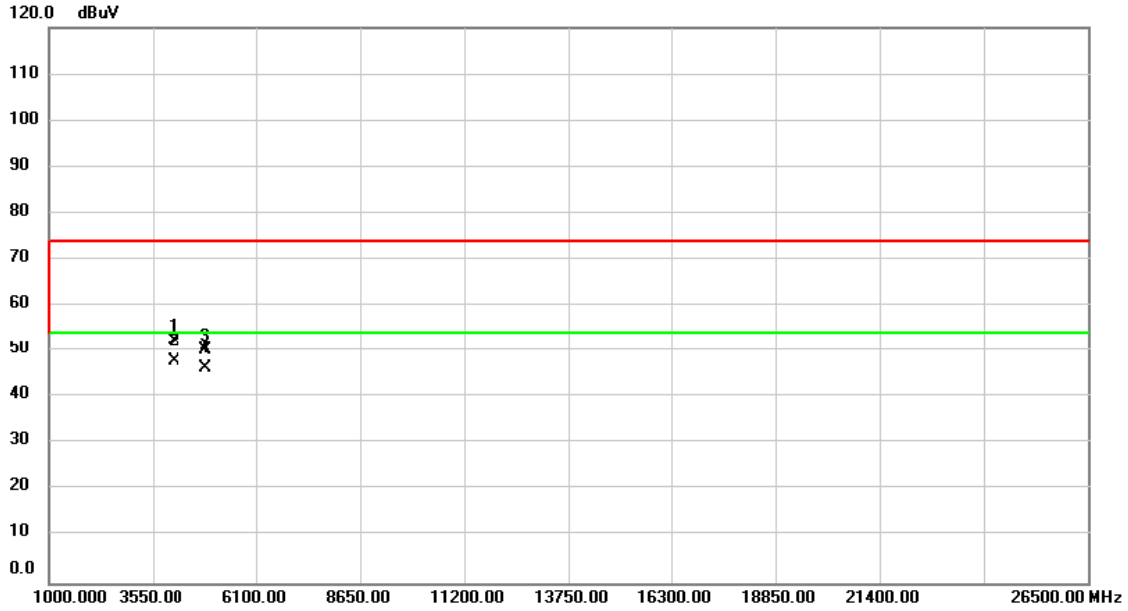

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4061.000	65.38	-12.96	52.42	74.00	-21.58	peak	
2	*	4061.000	60.96	-12.96	48.00	54.00	-6.00	AVG	
3		4874.000	61.79	-11.42	50.37	74.00	-23.63	peak	
4		4874.000	57.90	-11.42	46.48	54.00	-7.52	AVG	

Test Mode	TX B MODE _2437 MHz_ Antenna Type: Dipole	Polarization	Horizontal
-----------	---	--------------	------------


**Orthogonal Axis: Z**

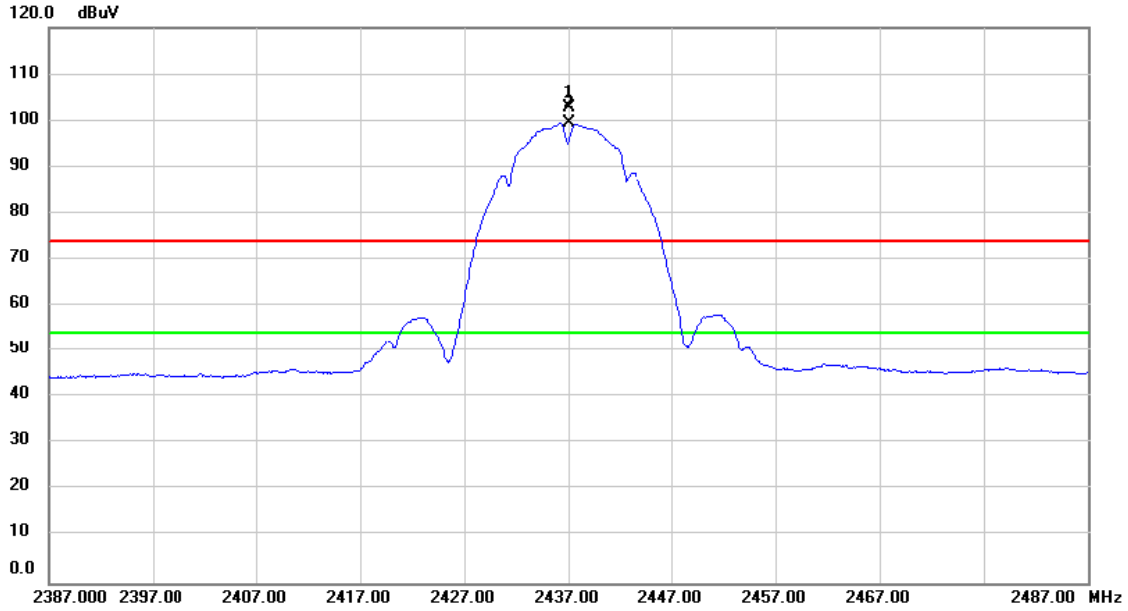

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	X	2437.000	71.62	31.01	102.63	74.00	28.63	peak	No Limit
2	*	2437.000	68.34	31.01	99.35	54.00	45.35	AVG	No Limit

Test Mode	TX B MODE _2437 MHz_ Antenna Type: Dipole	Polarization	Horizontal
-----------	---	--------------	------------


**Orthogonal Axis: Z**

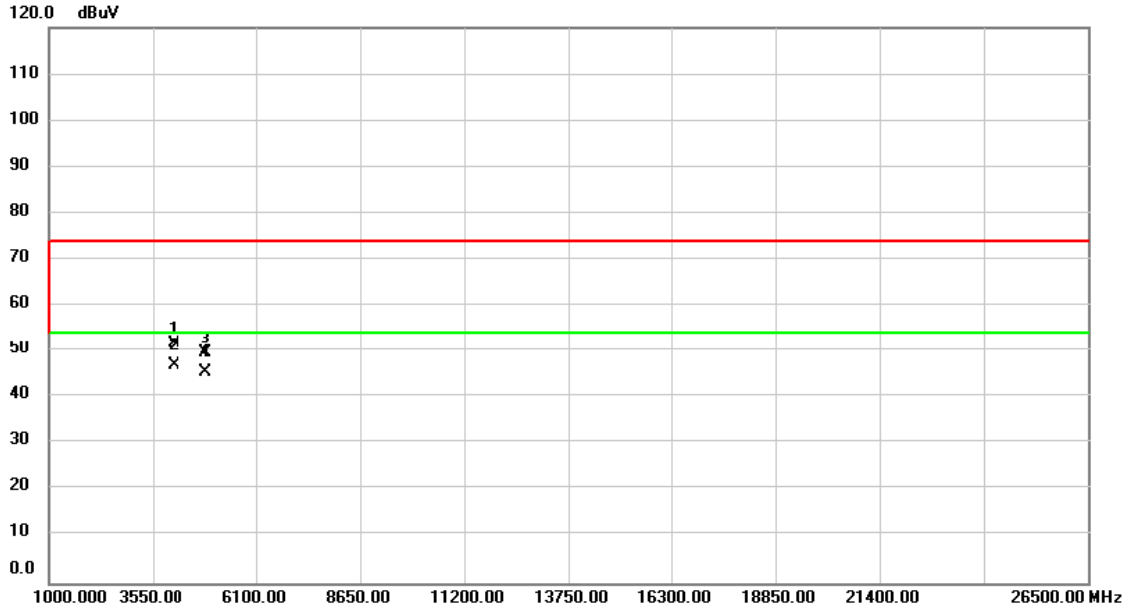

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4061.000	64.66	-12.96	51.70	74.00	-22.30	peak	
2	*	4061.000	59.98	-12.96	47.02	54.00	-6.98	AVG	
3		4874.000	60.97	-11.42	49.55	74.00	-24.45	peak	
4		4874.000	56.96	-11.42	45.54	54.00	-8.46	AVG	

Test Mode	TX B MODE _2462 MHz_ Antenna Type: Dipole	Polarization	Vertical
-----------	---	--------------	----------


**Orthogonal Axis: Z**

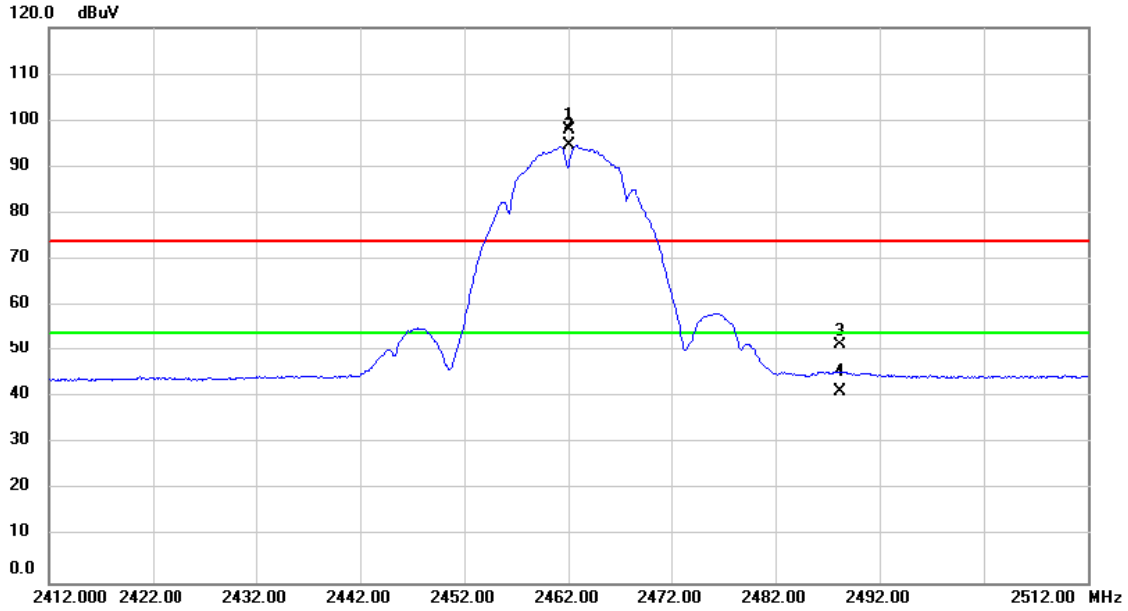

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	X	2462.000	66.90	31.09	97.99	74.00	23.99	peak	No Limit
2	*	2462.000	63.48	31.09	94.57	54.00	40.57	AVG	No Limit
3		2488.169	20.37	31.19	51.56	74.00	-22.44	peak	
4		2488.169	10.13	31.19	41.32	54.00	-12.68	AVG	

Test Mode	TX B MODE _2462 MHz_ Antenna Type: Dipole	Polarization	Vertical
-----------	---	--------------	----------


**Orthogonal Axis: Z**

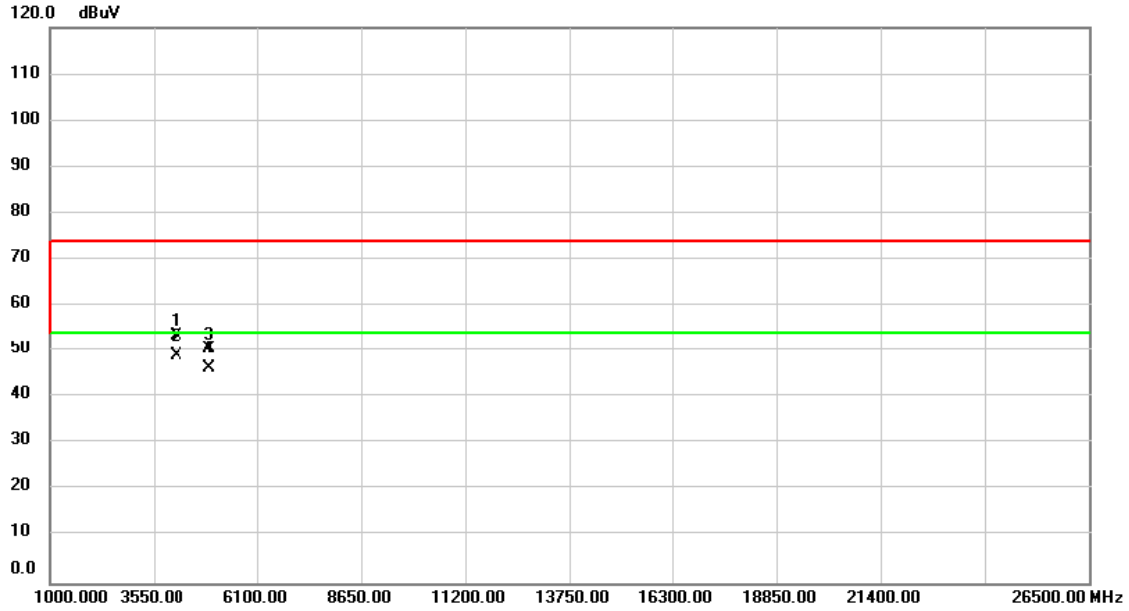

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4103.000	66.28	-12.84	53.44	74.00	-20.56	peak	
2	*	4103.000	61.75	-12.84	48.91	54.00	-5.09	AVG	
3		4924.000	61.99	-11.37	50.62	74.00	-23.38	peak	
4		4924.000	57.77	-11.37	46.40	54.00	-7.60	AVG	

Test Mode TX B MODE \_2462 MHz\_ Antenna Type: Dipole Polarization Horizontal


**Orthogonal Axis: Z**

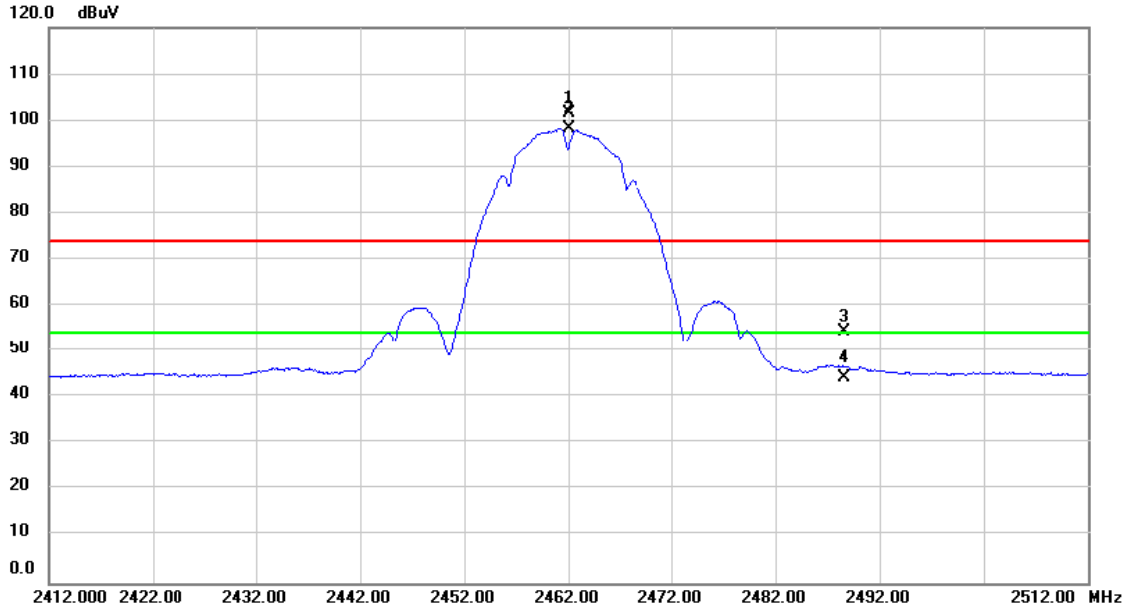

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	X	2462.000	70.52	31.09	101.61	74.00	27.61	peak	No Limit
2	*	2462.000	67.17	31.09	98.26	54.00	44.26	AVG	No Limit
3		2488.599	23.27	31.19	54.46	74.00	-19.54	peak	
4		2488.599	12.94	31.19	44.13	54.00	-9.87	AVG	

Test Mode	TX B MODE _2462 MHz_ Antenna Type: Dipole	Polarization	Horizontal
-----------	---	--------------	------------

**Orthogonal Axis: Z**

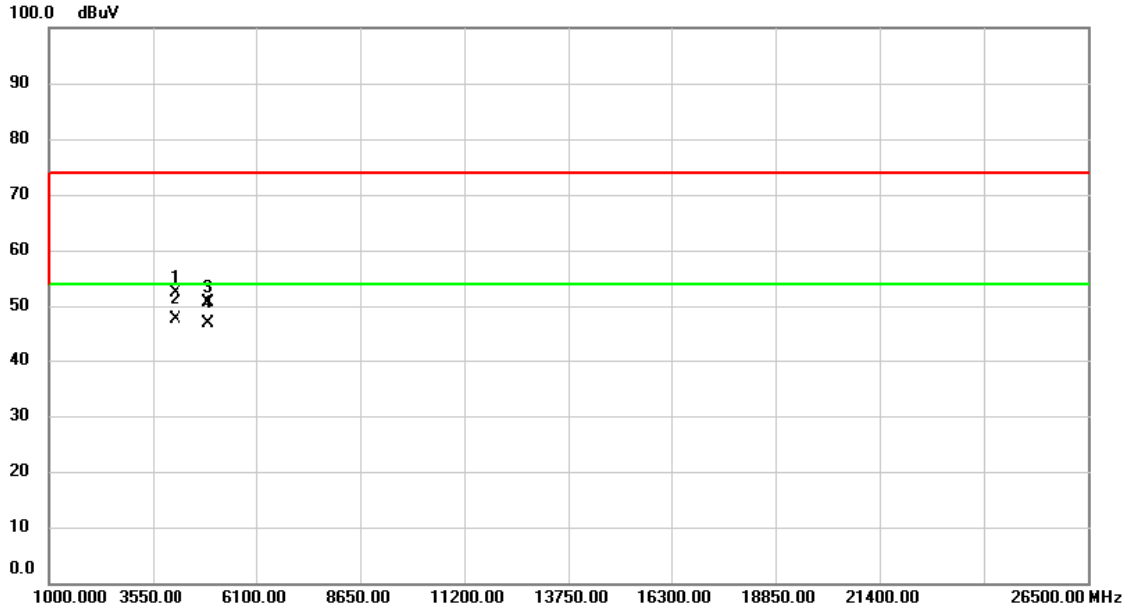


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4103.000	65.31	-12.84	52.47	74.00	-21.53	peak	
2	*	4103.000	60.40	-12.84	47.56	54.00	-6.44	AVG	
3		4924.000	62.01	-11.37	50.64	74.00	-23.36	peak	
4		4924.000	58.17	-11.37	46.80	54.00	-7.20	AVG	



Test Mode	TX G MODE _2412 MHz_ Antenna Type: Dipole	Polarization	Vertical
-----------	---	--------------	----------


Orthogonal Axis: Z

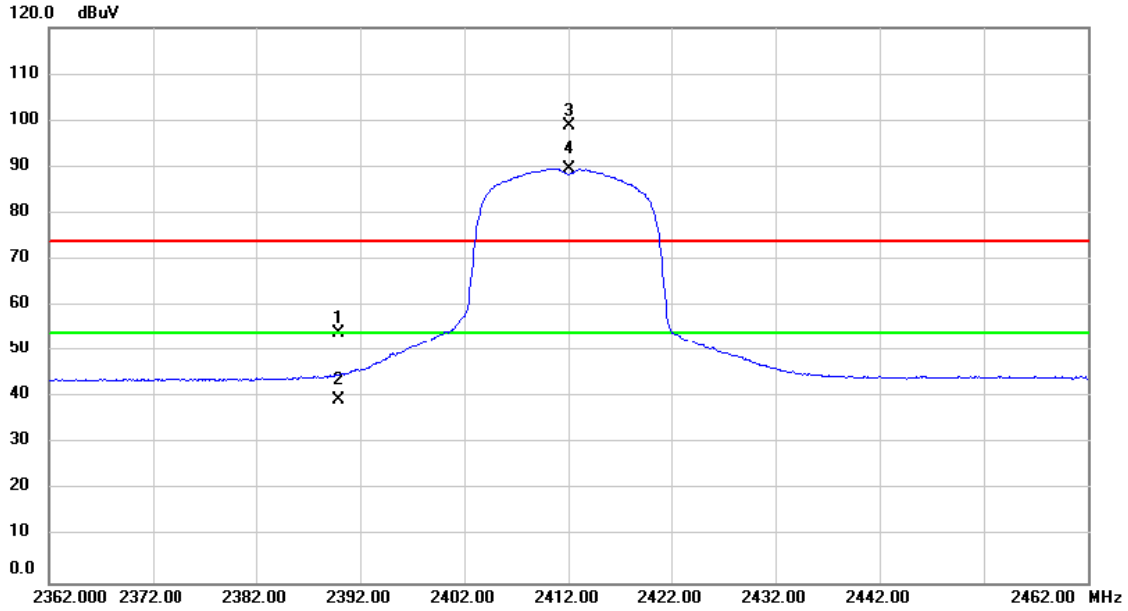

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		2389.972	23.26	30.84	54.10	74.00	-19.90	peak	
2		2389.972	8.57	30.84	39.41	54.00	-14.59	AVG	
3	X	2412.000	68.04	30.92	98.96	74.00	24.96	peak	No Limit
4	*	2412.000	58.60	30.92	89.52	54.00	35.52	AVG	No Limit

Test Mode	TX G MODE _2412 MHz_ Antenna Type: Dipole	Polarization	Vertical
-----------	---	--------------	----------


**Orthogonal Axis: Z**

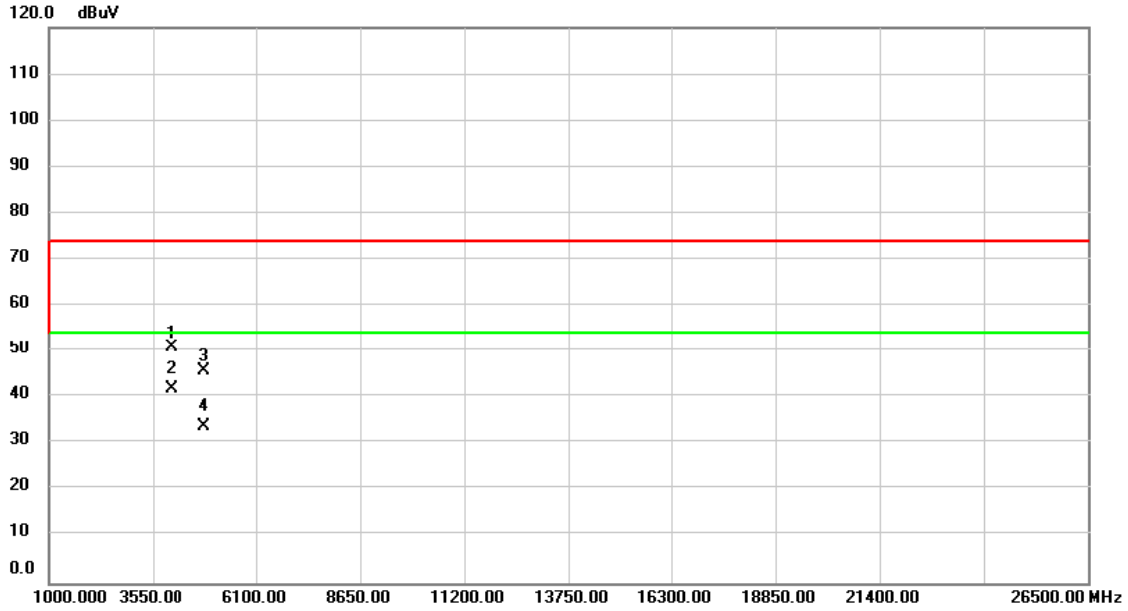

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4020.000	64.06	-13.07	50.99	74.00	-23.01	peak	
2	*	4020.000	54.80	-13.07	41.73	54.00	-12.27	AVG	
3		4824.000	57.30	-11.48	45.82	74.00	-28.18	peak	
4		4824.000	45.21	-11.48	33.73	54.00	-20.27	AVG	

Test Mode TX G MODE \_2412 MHz\_ Antenna Type: Dipole Polarization Horizontal


**Orthogonal Axis: Z**

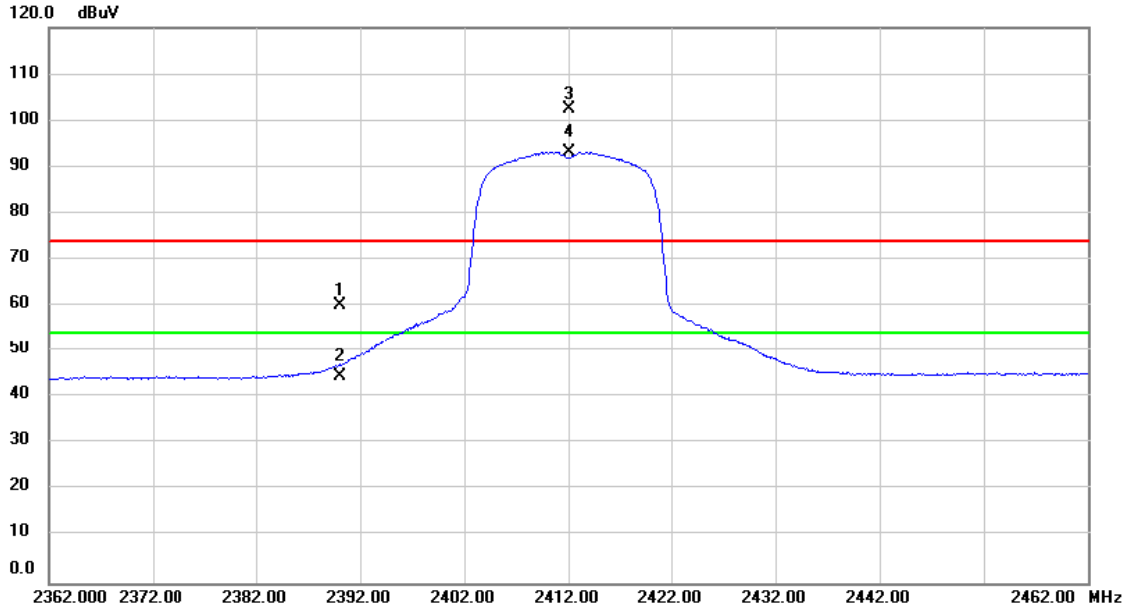

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		2390.000	29.24	30.84	60.08	74.00	-13.92	peak	
2		2390.000	13.78	30.84	44.62	54.00	-9.38	AVG	
3	X	2412.000	71.66	30.92	102.58	74.00	28.58	peak	No Limit
4	*	2412.000	62.24	30.92	93.16	54.00	39.16	AVG	No Limit

Test Mode	TX G MODE _2412 MHz_ Antenna Type: Dipole	Polarization	Horizontal
-----------	---	--------------	------------


**Orthogonal Axis: Z**

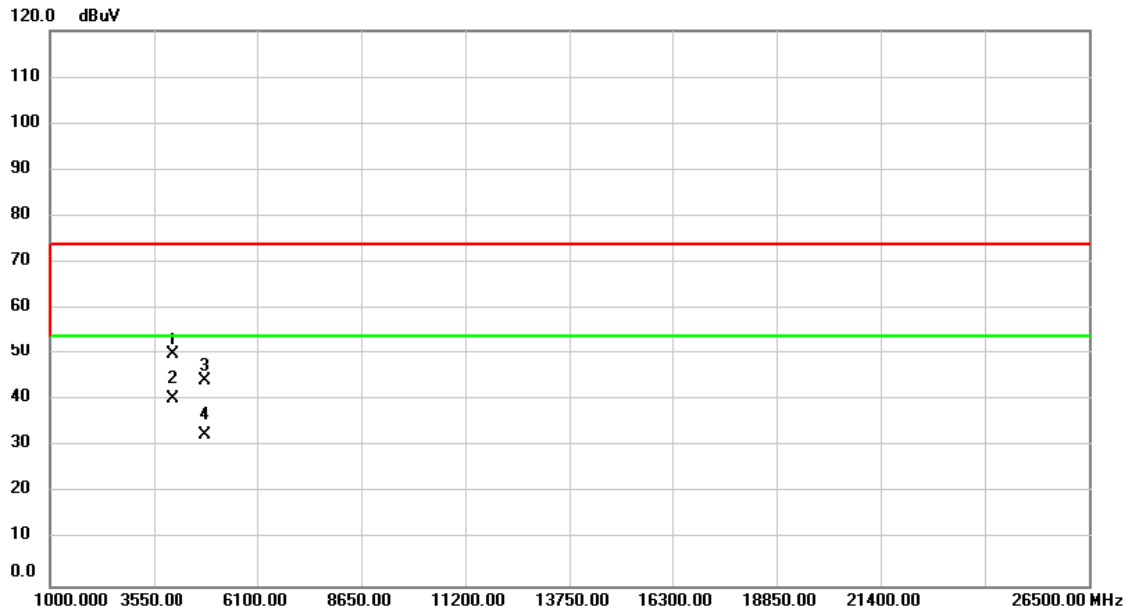

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4020.000	63.09	-13.07	50.02	74.00	-23.98	peak	
2	*	4020.000	53.55	-13.07	40.48	54.00	-13.52	AVG	
3		4824.000	55.80	-11.48	44.32	74.00	-29.68	peak	
4		4824.000	44.00	-11.48	32.52	54.00	-21.48	AVG	

Test Mode	TX G MODE _2437 MHz_ Antenna Type: Dipole	Polarization	Vertical
-----------	---	--------------	----------


**Orthogonal Axis: Z**

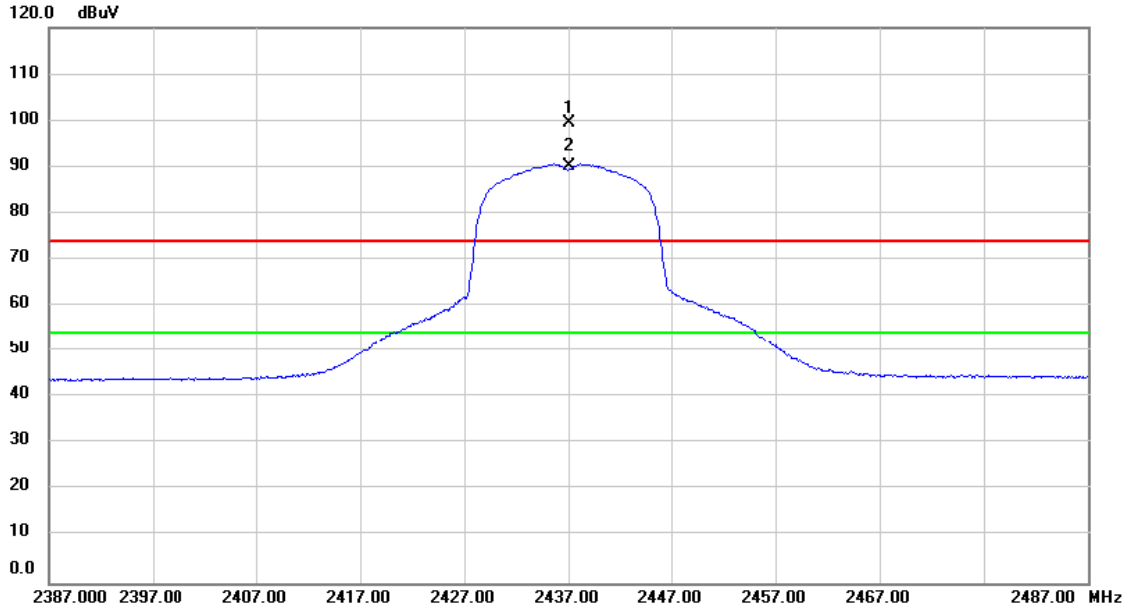

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	X	2437.000	68.53	31.01	99.54	74.00	25.54	peak	No Limit
2	*	2437.000	59.14	31.01	90.15	54.00	36.15	AVG	No Limit

Test Mode	TX G MODE _2437 MHz_ Antenna Type: Dipole	Polarization	Vertical
-----------	---	--------------	----------


**Orthogonal Axis: Z**

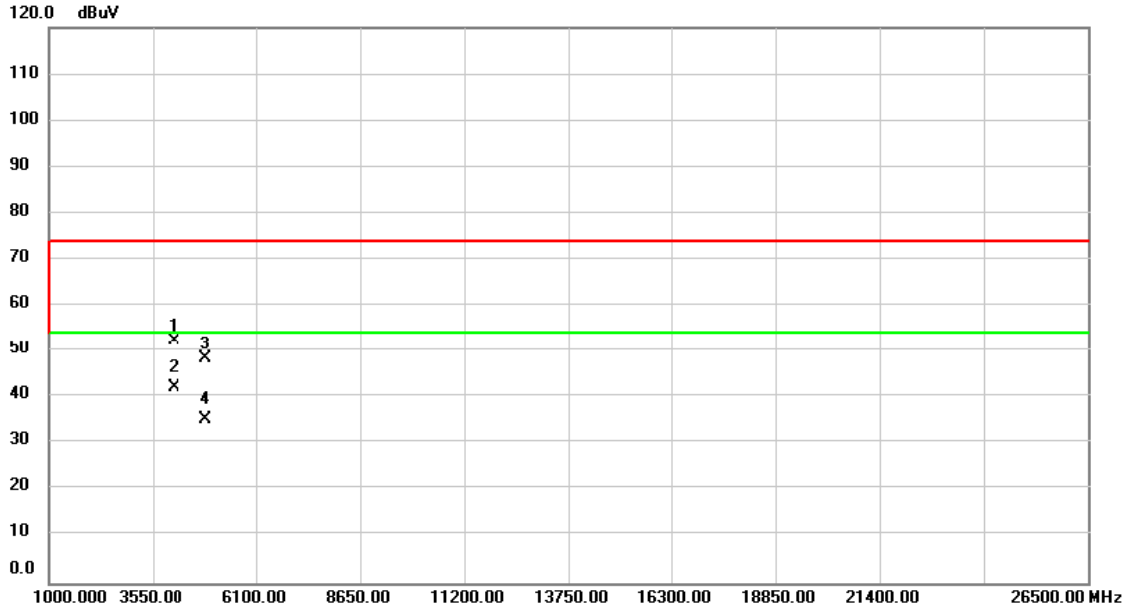

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4061.000	65.34	-12.96	52.38	74.00	-21.62	peak	
2	*	4061.000	55.19	-12.96	42.23	54.00	-11.77	AVG	
3		4874.000	59.74	-11.42	48.32	74.00	-25.68	peak	
4		4874.000	46.80	-11.42	35.38	54.00	-18.62	AVG	

Test Mode TX G MODE \_2437 MHz\_ Antenna Type: Dipole Polarization Horizontal


**Orthogonal Axis: Z**

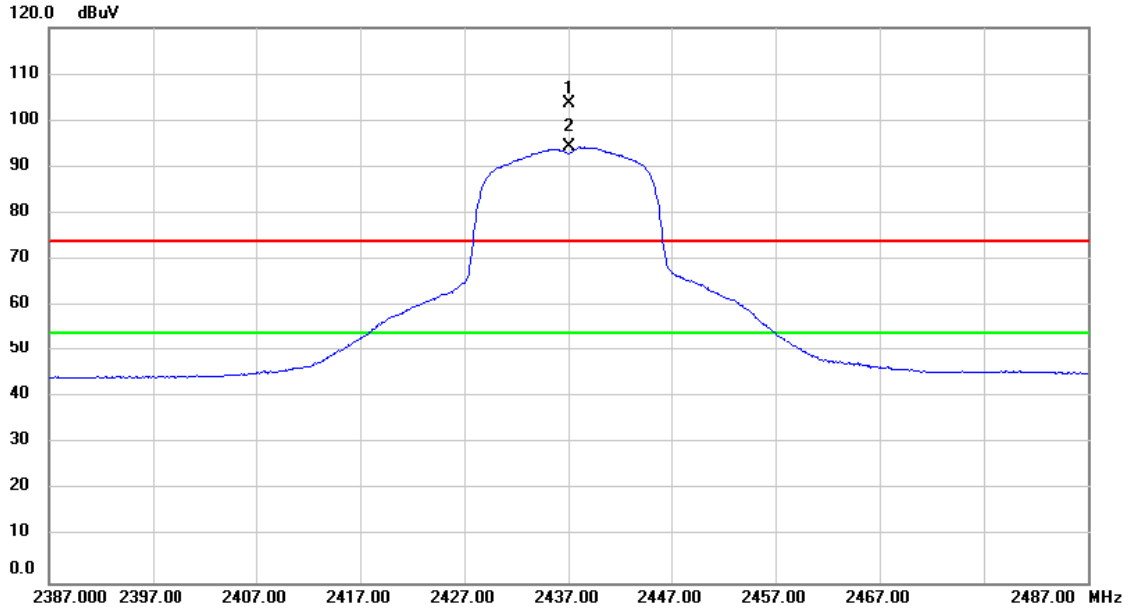

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	X	2437.000	72.52	31.01	103.53	74.00	29.53	peak	No Limit
2	*	2437.000	63.23	31.01	94.24	54.00	40.24	AVG	No Limit

Test Mode	TX G MODE _2437 MHz_ Antenna Type: Dipole	Polarization	Horizontal
-----------	---	--------------	------------

**Orthogonal Axis: Z**

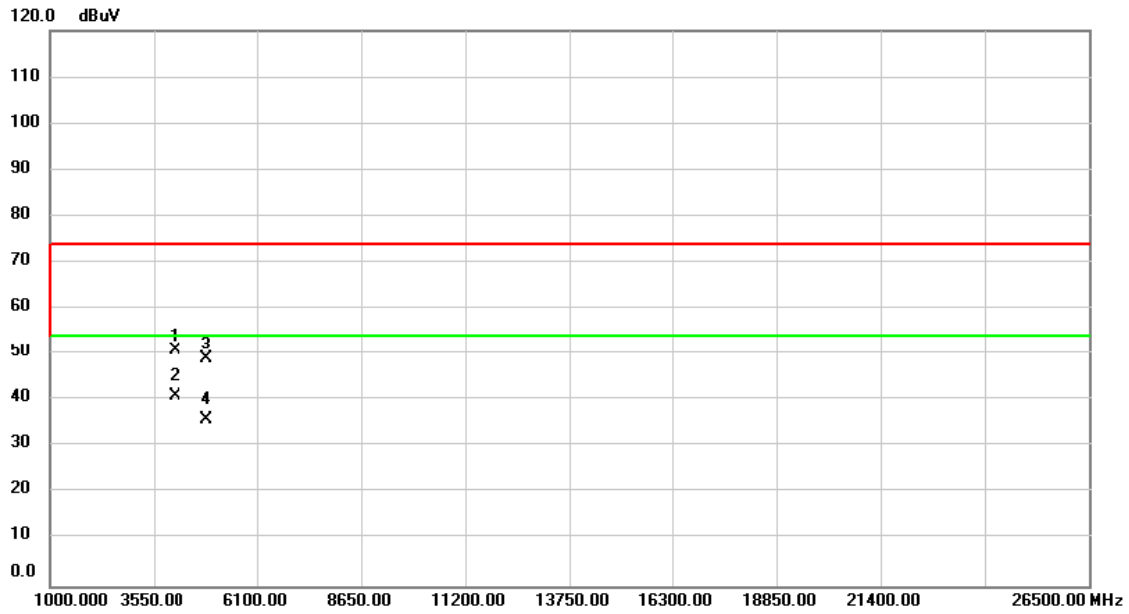


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4061.000	63.75	-12.96	50.79	74.00	-23.21	peak	
2	*	4061.000	53.88	-12.96	40.92	54.00	-13.08	AVG	
3		4874.000	60.52	-11.42	49.10	74.00	-24.90	peak	
4		4874.000	47.18	-11.42	35.76	54.00	-18.24	AVG	



Test Mode	TX G MODE _2462 MHz_ Antenna Type: Dipole	Polarization	Vertical
-----------	---	--------------	----------


Orthogonal Axis: Z

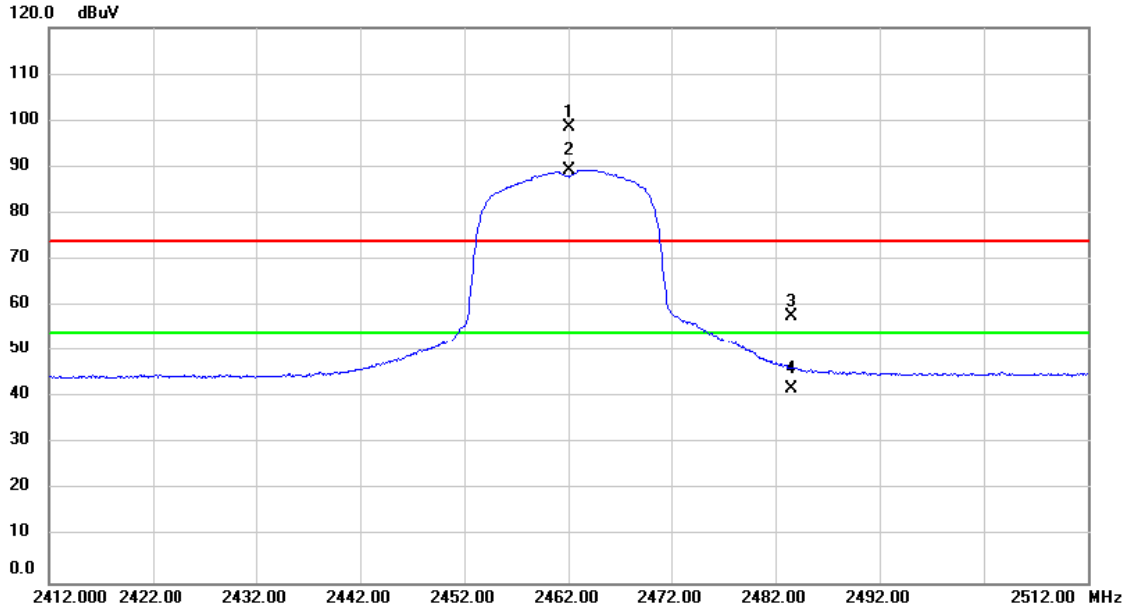

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	X	2462.000	67.42	31.09	98.51	74.00	24.51	peak	No Limit
2	*	2462.000	58.26	31.09	89.35	54.00	35.35	AVG	No Limit
3		2483.517	26.59	31.17	57.76	74.00	-16.24	peak	
4		2483.517	10.67	31.17	41.84	54.00	-12.16	AVG	

Test Mode	TX G MODE _2462 MHz_ Antenna Type: Dipole	Polarization	Vertical
-----------	---	--------------	----------


**Orthogonal Axis: Z**

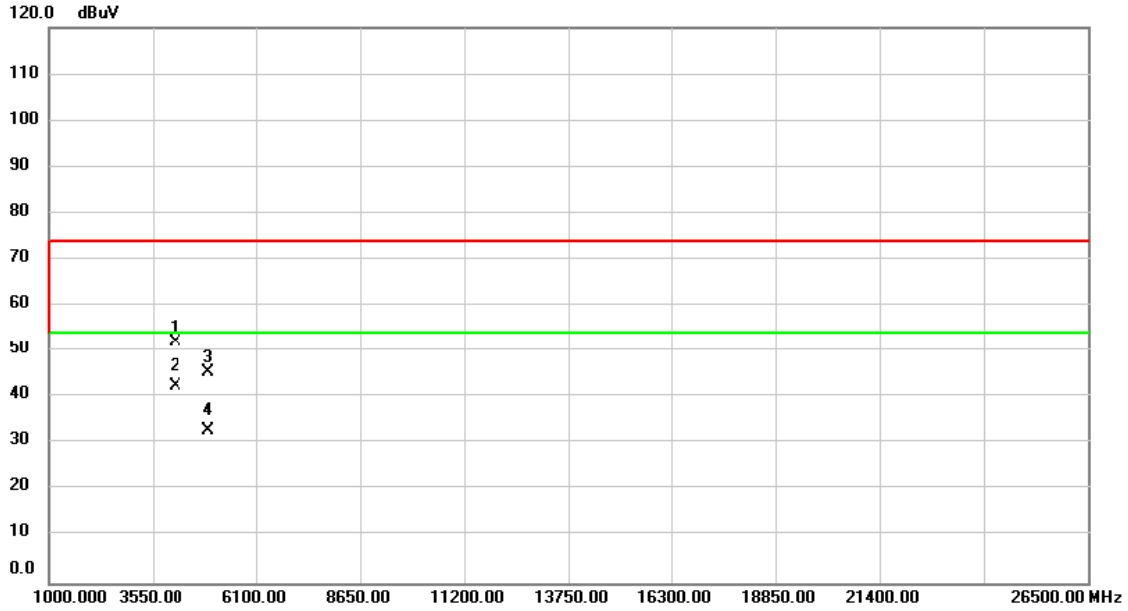

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4103.000	64.80	-12.84	51.96	74.00	-22.04	peak	
2	*	4103.000	55.44	-12.84	42.60	54.00	-11.40	AVG	
3		4924.000	56.73	-11.37	45.36	74.00	-28.64	peak	
4		4924.000	44.10	-11.37	32.73	54.00	-21.27	AVG	

Test Mode	TX G MODE _2462 MHz_ Antenna Type: Dipole	Polarization	Horizontal
-----------	---	--------------	------------


**Orthogonal Axis: Z**

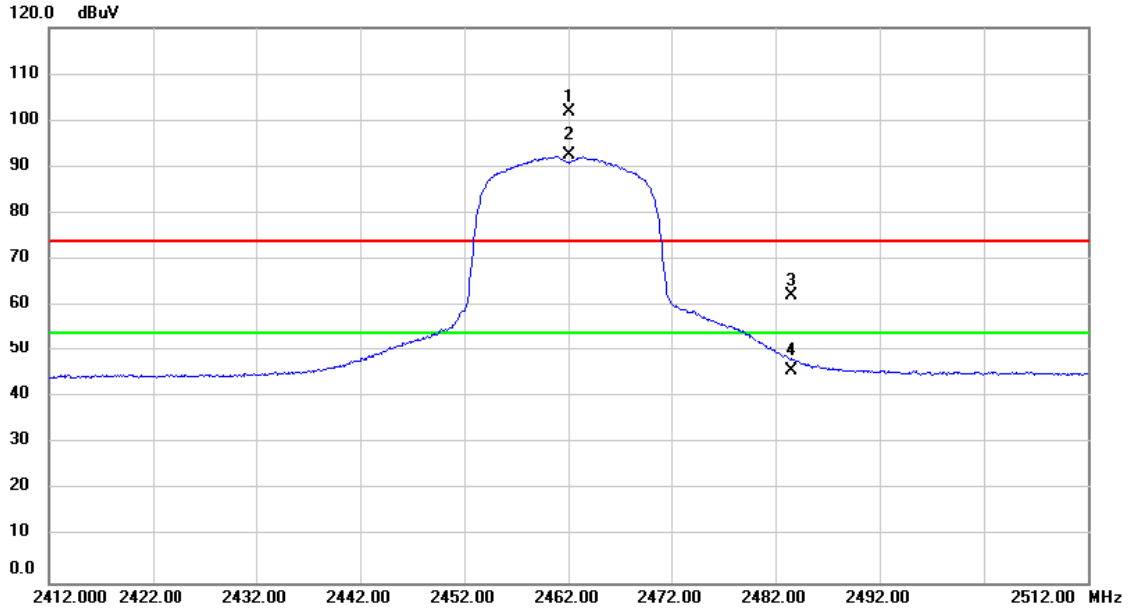

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	X	2462.000	70.62	31.09	101.71	74.00	27.71	peak	No Limit
2	*	2462.000	61.52	31.09	92.61	54.00	38.61	AVG	No Limit
3		2483.517	31.19	31.17	62.36	74.00	-11.64	peak	
4		2483.517	14.62	31.17	45.79	54.00	-8.21	AVG	

Test Mode	TX G MODE _2462 MHz_ Antenna Type: Dipole	Polarization	Horizontal
-----------	---	--------------	------------


**Orthogonal Axis: Z**

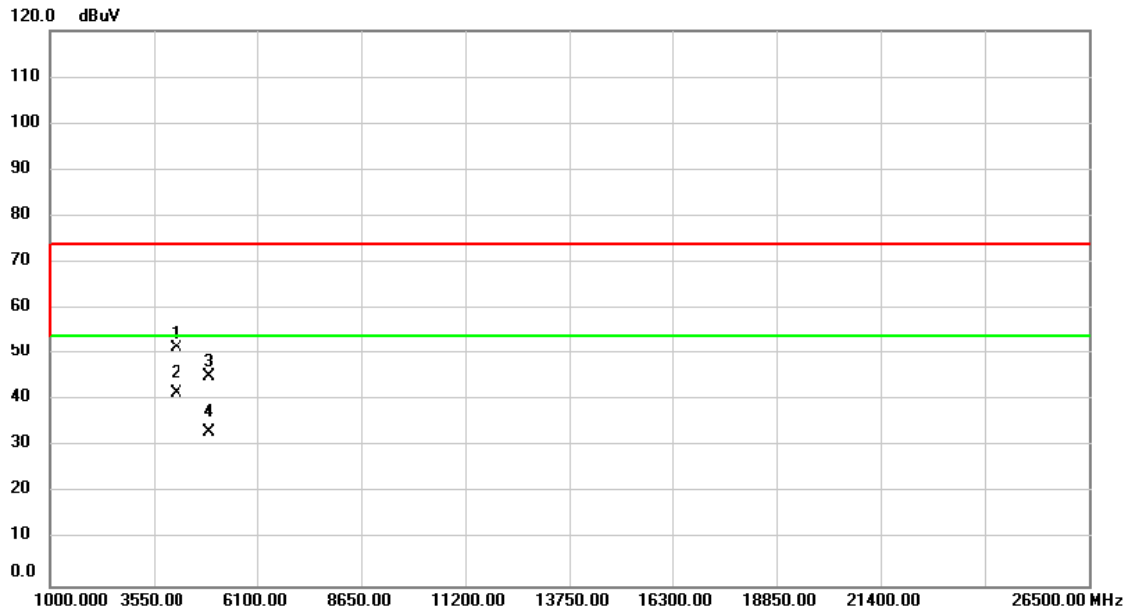

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4103.000	64.21	-12.84	51.37	74.00	-22.63	peak	
2	*	4103.000	54.45	-12.84	41.61	54.00	-12.39	AVG	
3		4924.000	56.53	-11.37	45.16	74.00	-28.84	peak	
4		4924.000	44.62	-11.37	33.25	54.00	-20.75	AVG	

Test Mode	TX N-20M MODE 2412MHz_ Antenna Type: Dipole	Polarization	Vertical
-----------	--	--------------	----------


Orthogonal Axis: Z

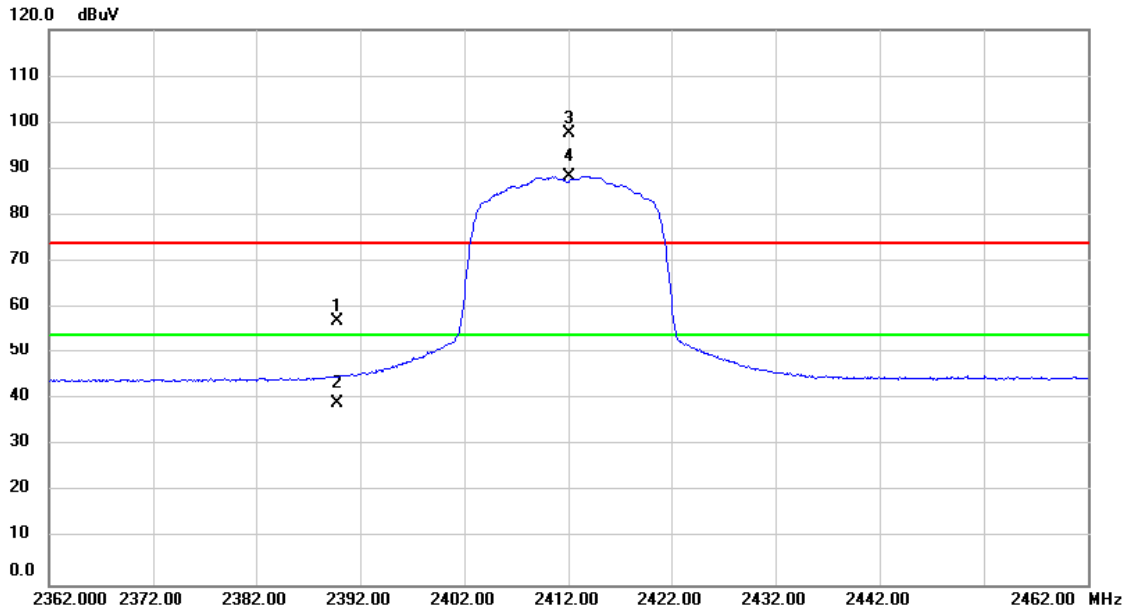

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		2389.860	26.36	30.84	57.20	74.00	-16.80	peak	
2		2389.860	8.32	30.84	39.16	54.00	-14.84	AVG	
3	X	2412.000	66.77	30.92	97.69	74.00	23.69	peak	No Limit
4	*	2412.000	57.32	30.92	88.24	54.00	34.24	AVG	No Limit

Test Mode	TX N-20M MODE 2412MHz_ Antenna Type: Dipole	Polarization	Vertical
-----------	--	--------------	----------


**Orthogonal Axis: Z**

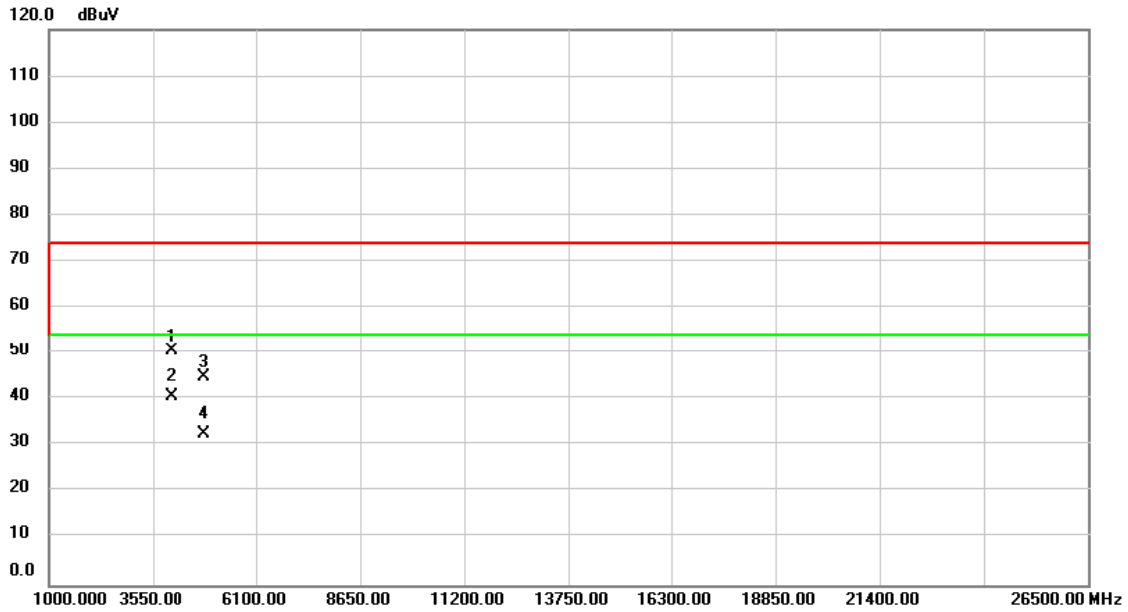

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	4020.000	63.67	-13.07	50.60	74.00	-23.40	peak	
2 *	4020.000	53.83	-13.07	40.76	54.00	-13.24	AVG	
3	4824.000	56.34	-11.48	44.86	74.00	-29.14	peak	
4	4824.000	44.11	-11.48	32.63	54.00	-21.37	AVG	

Test Mode	TX N-20M MODE 2412MHz_ Antenna Type: Dipole	Polarization	Horizontal
-----------	--	--------------	------------


**Orthogonal Axis: Z**

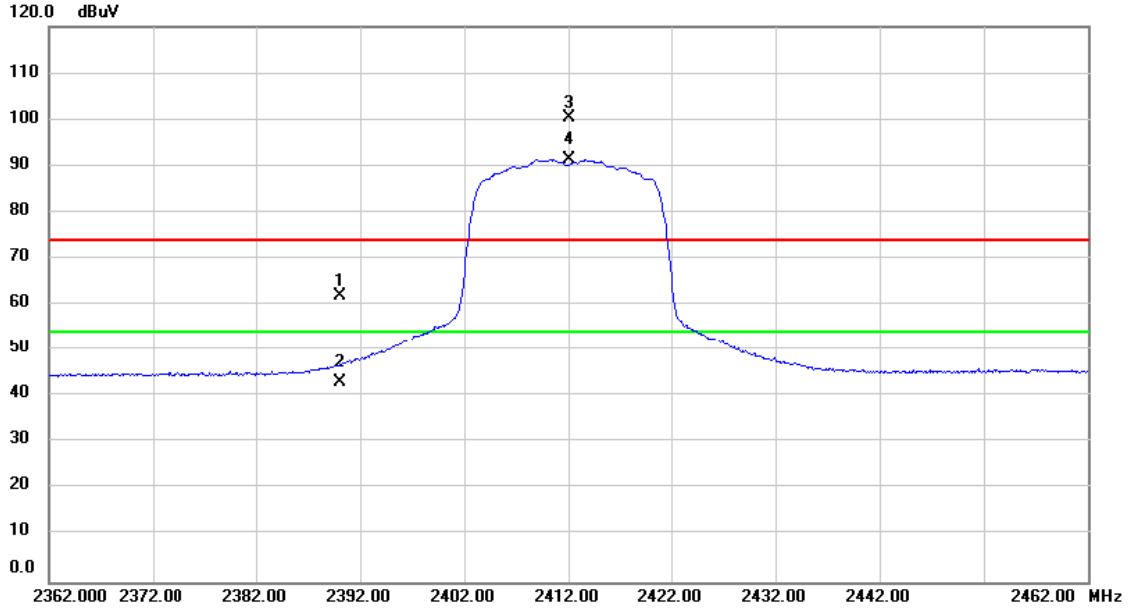

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	2390.000	31.14	30.84	61.98	74.00	-12.02	peak	
2	2390.000	12.33	30.84	43.17	54.00	-10.83	AVG	
3 X	2412.000	69.52	30.92	100.44	74.00	26.44	peak	No Limit
4 *	2412.000	60.47	30.92	91.39	54.00	37.39	AVG	No Limit

Test Mode	TX N-20M MODE 2412MHz_ Antenna Type: Dipole	Polarization	Horizontal
-----------	--	--------------	------------

**Orthogonal Axis: Z**

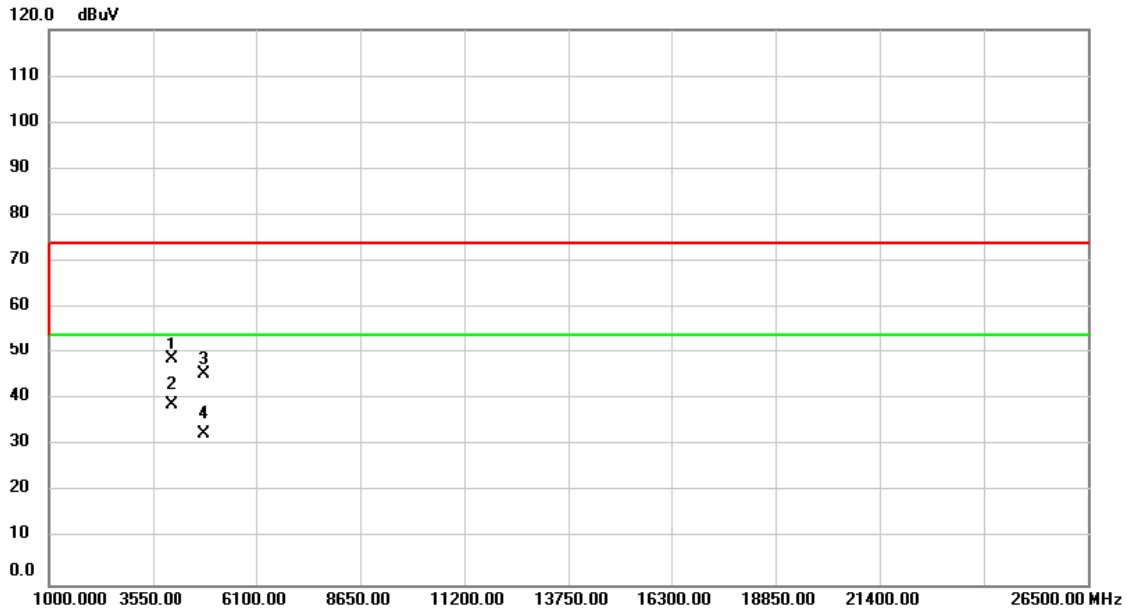


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	4020.000	61.96	-13.07	48.89	74.00	-25.11	peak	
2 *	4020.000	51.94	-13.07	38.87	54.00	-15.13	AVG	
3	4824.000	56.94	-11.48	45.46	74.00	-28.54	peak	
4	4824.000	43.94	-11.48	32.46	54.00	-21.54	AVG	



Test Mode	TX N-20M MODE 2437MHz_ Antenna Type: Dipole	Polarization	Vertical
-----------	--	--------------	----------


**Orthogonal Axis: Z**

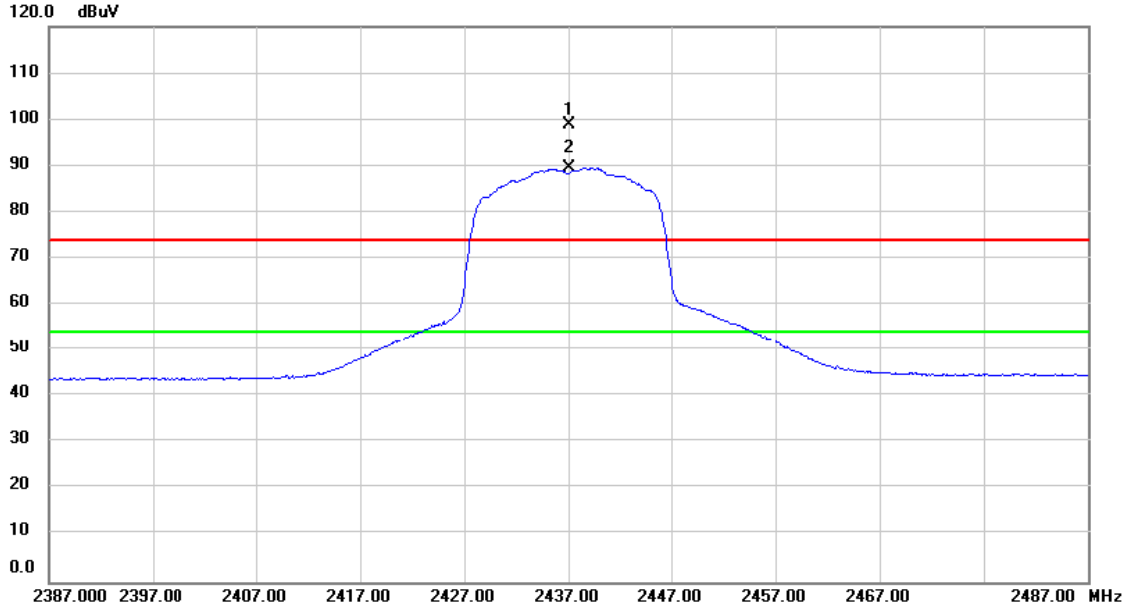

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	X	2437.000	67.99	31.01	99.00	74.00	25.00	peak	No Limit
2	*	2437.000	58.42	31.01	89.43	54.00	35.43	AVG	No Limit

Test Mode	TX N-20M MODE 2437MHz_ Antenna Type: Dipole	Polarization	Vertical
-----------	--	--------------	----------


**Orthogonal Axis: Z**

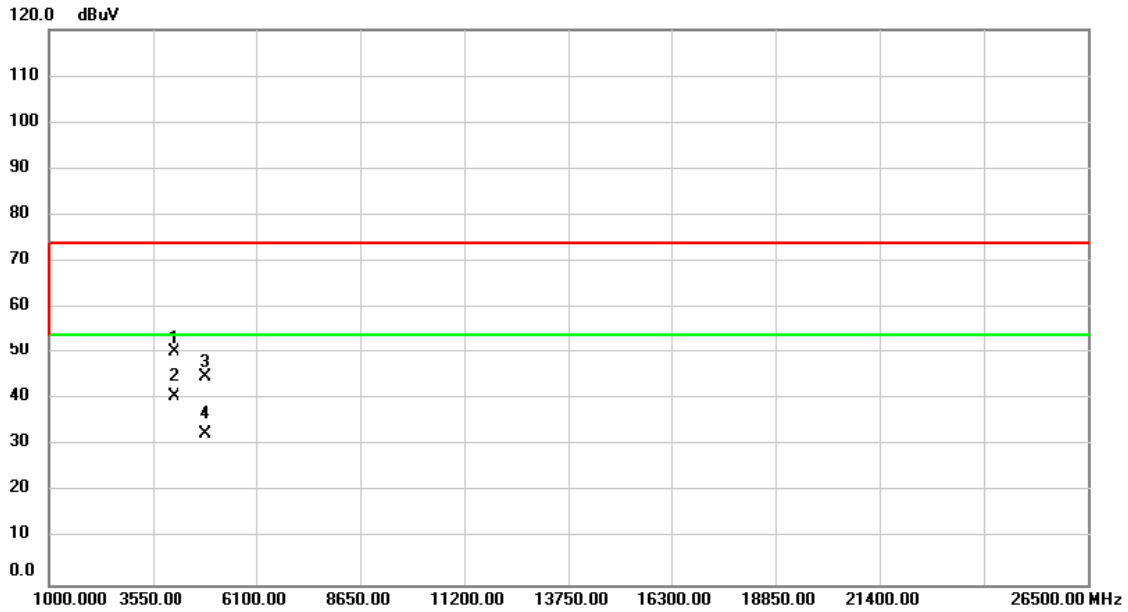

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	4061.000	63.21	-12.96	50.25	74.00	-23.75	peak	
2 *	4061.000	53.69	-12.96	40.73	54.00	-13.27	AVG	
3	4874.000	56.38	-11.42	44.96	74.00	-29.04	peak	
4	4874.000	43.96	-11.42	32.54	54.00	-21.46	AVG	

Test Mode	TX N-20M MODE 2437MHz_ Antenna Type: Dipole	Polarization	Horizontal
-----------	--	--------------	------------


**Orthogonal Axis: Z**

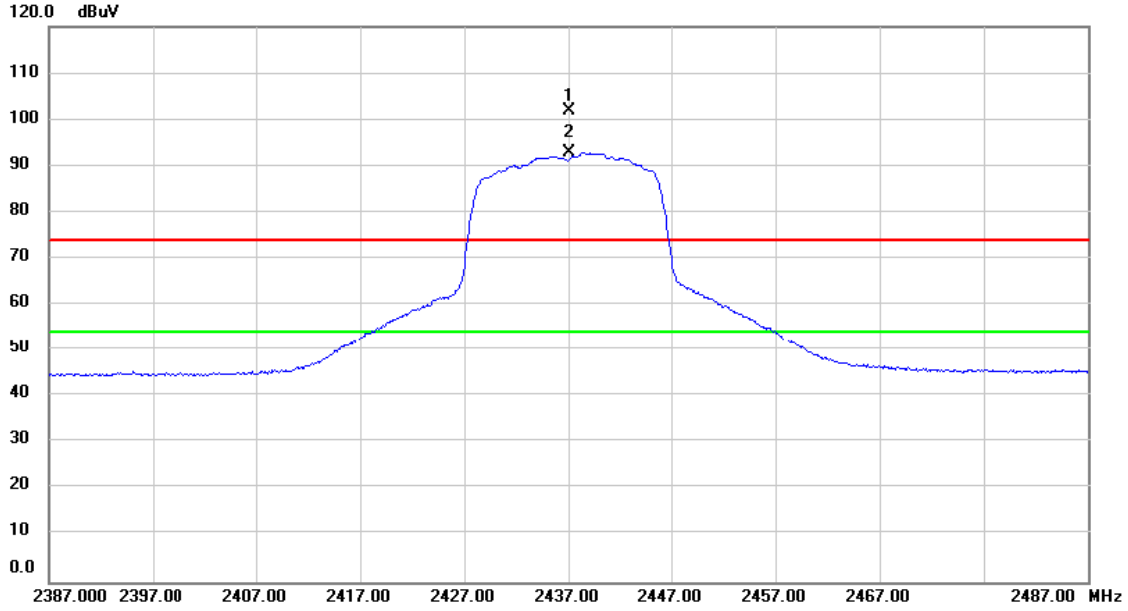

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	X	2437.000	70.77	31.01	101.78	74.00	27.78	peak	No Limit
2	*	2437.000	61.85	31.01	92.86	54.00	38.86	AVG	No Limit

Test Mode	TX N-20M MODE 2437MHz_ Antenna Type: Dipole	Polarization	Horizontal
-----------	--	--------------	------------


**Orthogonal Axis: Z**

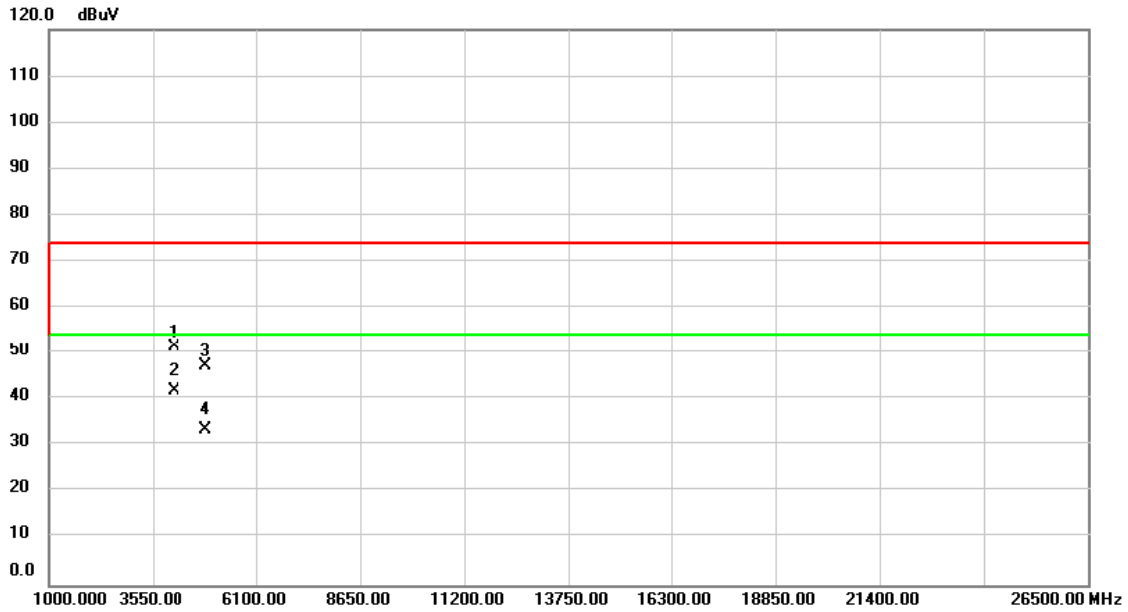

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	4061.000	64.42	-12.96	51.46	74.00	-22.54	peak	
2 *	4061.000	54.67	-12.96	41.71	54.00	-12.29	AVG	
3	4874.000	58.69	-11.42	47.27	74.00	-26.73	peak	
4	4874.000	44.87	-11.42	33.45	54.00	-20.55	AVG	

Test Mode	TX N-20M MODE 2462MHz_ Antenna Type: Dipole	Polarization	Vertical
-----------	--	--------------	----------


Orthogonal Axis: Z

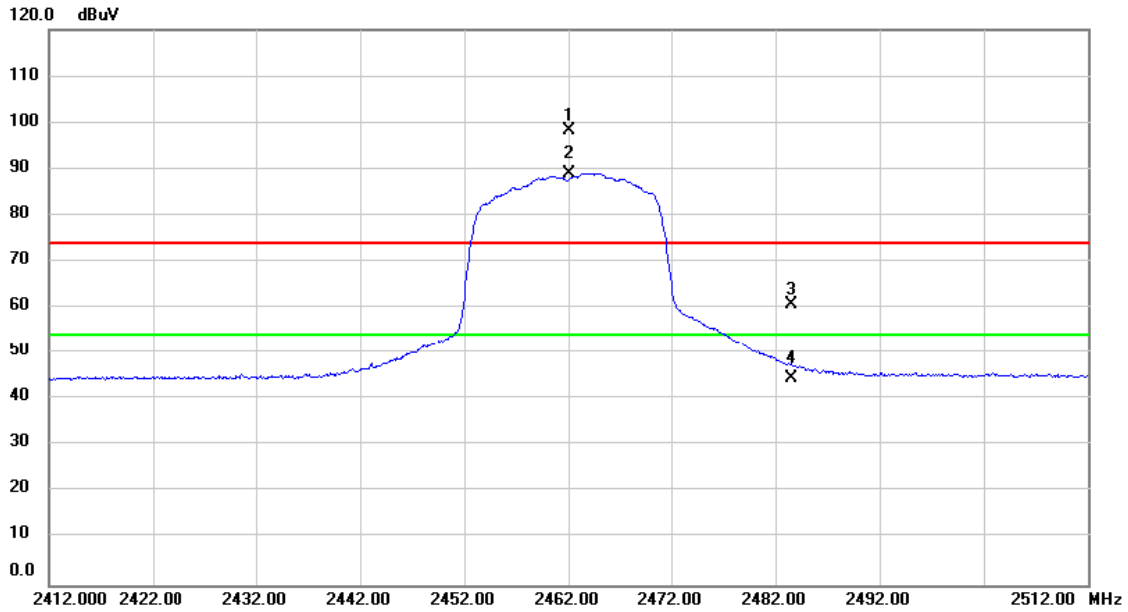

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	X	2462.000	67.03	31.09	98.12	74.00	24.12	peak	No Limit
2	*	2462.000	57.93	31.09	89.02	54.00	35.02	AVG	No Limit
3		2483.517	29.61	31.17	60.78	74.00	-13.22	peak	
4		2483.517	13.27	31.17	44.44	54.00	-9.56	AVG	

Test Mode	TX N-20M MODE 2462MHz_ Antenna Type: Dipole	Polarization	Vertical
-----------	--	--------------	----------


**Orthogonal Axis: Z**

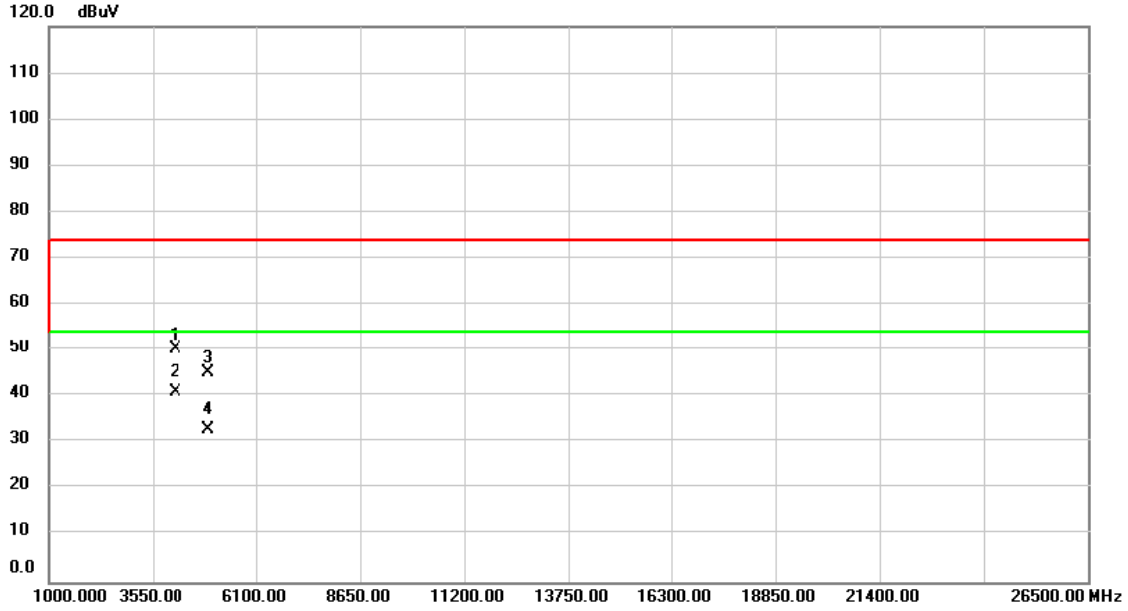

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	4103.000	63.13	-12.84	50.29	74.00	-23.71	peak	
2 *	4103.000	53.92	-12.84	41.08	54.00	-12.92	AVG	
3	4924.000	56.58	-11.37	45.21	74.00	-28.79	peak	
4	4924.000	44.36	-11.37	32.99	54.00	-21.01	AVG	

Test Mode	TX N-20M MODE 2462MHz_ Antenna Type: Dipole	Polarization	Horizontal
-----------	--	--------------	------------


Orthogonal Axis: Z

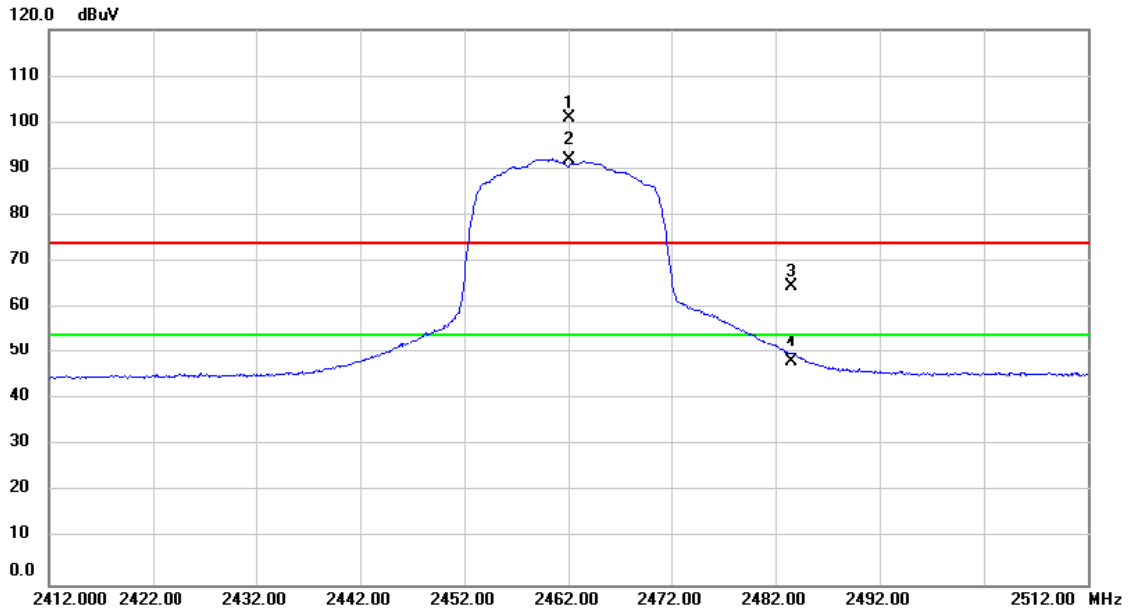

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	X	2462.000	69.99	31.09	101.08	74.00	27.08	peak	No Limit
2	*	2462.000	60.93	31.09	92.02	54.00	38.02	AVG	No Limit
3		2483.550	33.58	31.17	64.75	74.00	-9.25	peak	
4		2483.550	17.02	31.17	48.19	54.00	-5.81	AVG	

Test Mode	TX N-20M MODE 2462MHz_ Antenna Type: Dipole	Polarization	Horizontal
-----------	--	--------------	------------

**Orthogonal Axis: Z**

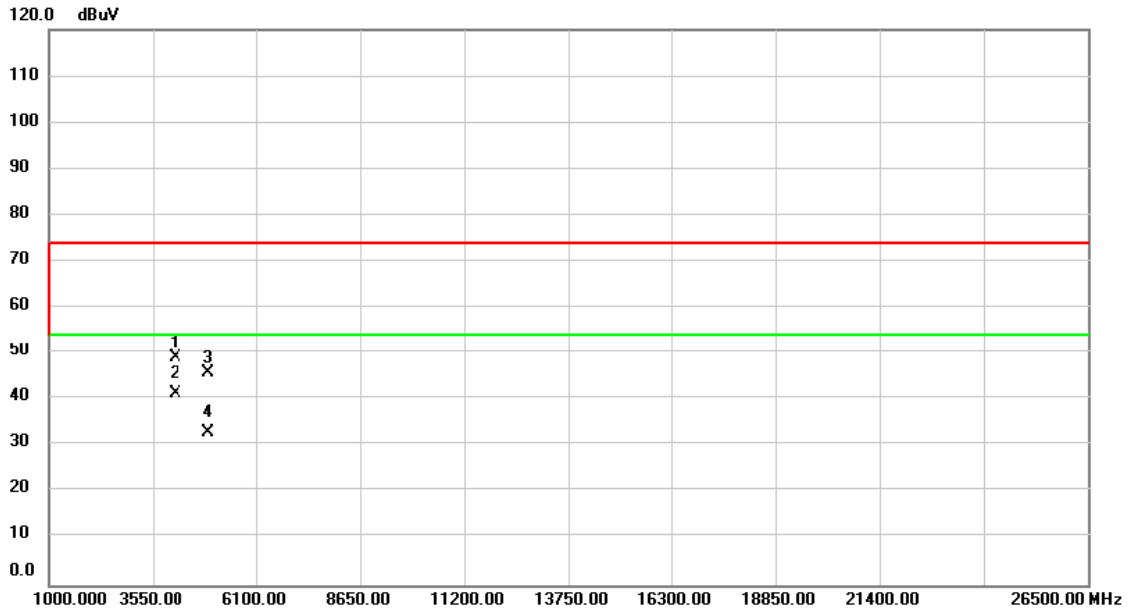


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	4103.000	61.92	-12.84	49.08	74.00	-24.92	peak	
2 *	4103.000	54.11	-12.84	41.27	54.00	-12.73	AVG	
3	4924.000	57.26	-11.37	45.89	74.00	-28.11	peak	
4	4924.000	44.28	-11.37	32.91	54.00	-21.09	AVG	



## APPENDIX E - BANDWIDTH


**Test Mode : TX B Mode\_CH01/06/11**

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	9.15	14.00	500	Complies
2437	9.15	13.84	500	Complies
2462	9.14	13.64	500	Complies

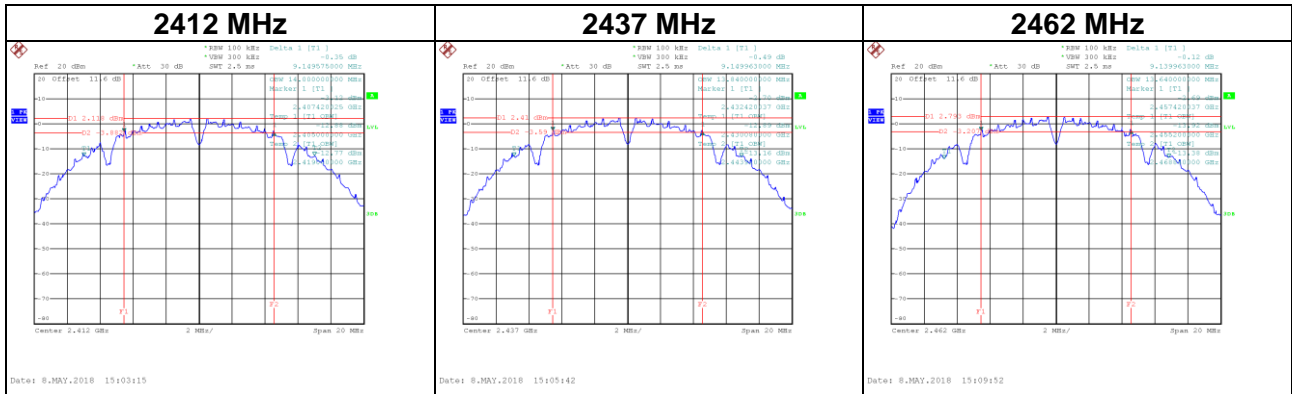




**Test Mode: TX G Mode\_CH01/06/11**

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	15.14	16.36	500	Complies
2437	15.10	16.40	500	Complies
2462	15.32	16.32	500	Complies

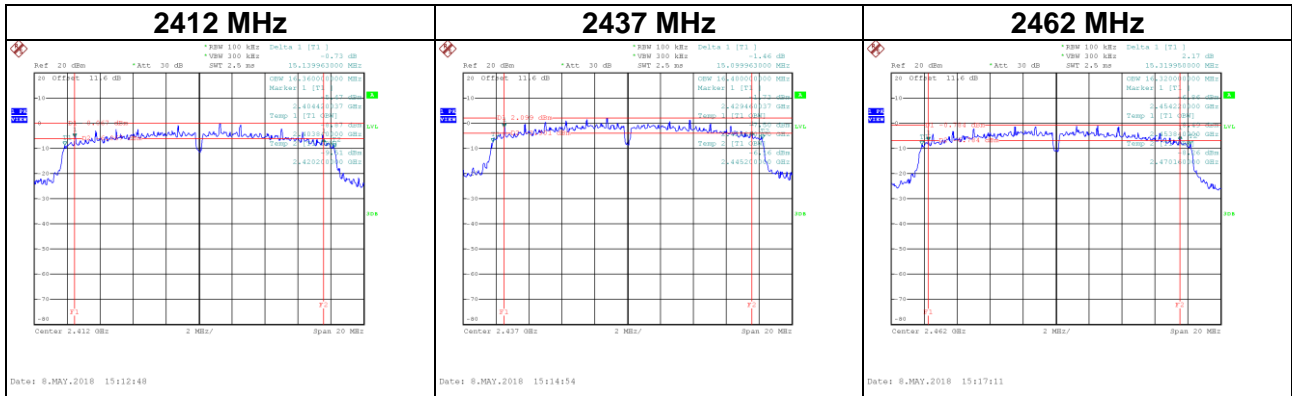

**Test Mode : TX N-20MHz Mode\_CH01/06/11**

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	15.16	17.48	500	Complies
2437	15.06	17.52	500	Complies
2462	15.10	17.44	500	Complies

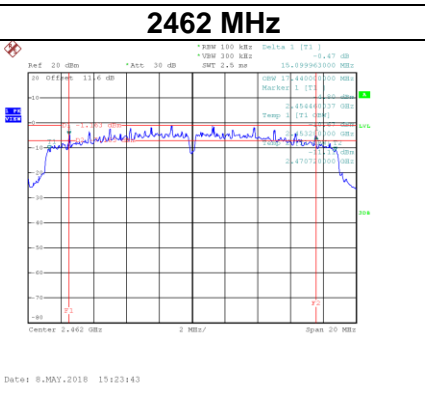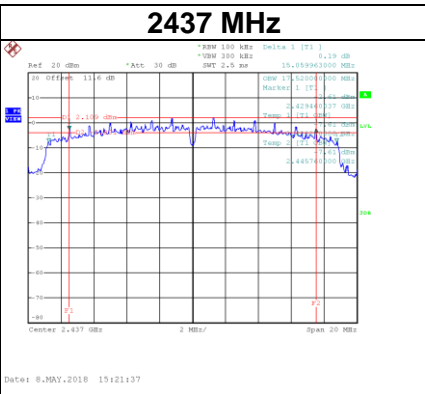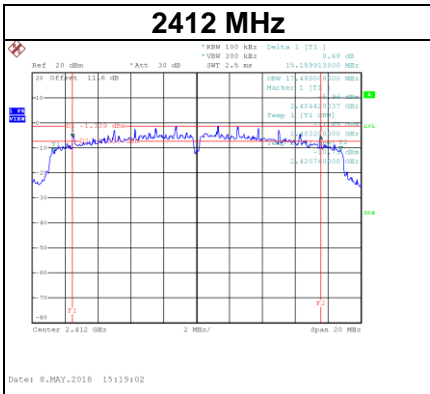

## APPENDIX F - MAXIMUM PEAK CONDUCTED OUTPUT POWER

Test Mode :TX B Mode_CH01/06/11					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	14.32	0.0270	30.00	1.00	Complies
2437	14.52	0.0283	30.00	1.00	Complies
2462	15.11	0.0324	30.00	1.00	Complies

Test Mode :TX G Mode_CH01/06/11					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	19.34	0.0859	30.00	1.00	Complies
2437	19.63	0.0918	30.00	1.00	Complies
2462	19.43	0.0877	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	19.21	0.0834	30.00	1.00	Complies
2437	19.47	0.0885	30.00	1.00	Complies
2462	19.21	0.0834	30.00	1.00	Complies

Test Mode :TX B Mode_CH01/06/11					
Frequency (MHz)	Average Power (dBm)	Average Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	12.07	0.0161	30.00	1.00	Complies
2437	12.21	0.0166	30.00	1.00	Complies
2462	12.82	0.0191	30.00	1.00	Complies





Test Mode :TX G Mode_CH01/06/11					
Frequency (MHz)	Average Power (dBm)	Average Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	9.63	0.0092	30.00	1.00	Complies
2437	12.67	0.0185	30.00	1.00	Complies
2462	10.21	0.0105	30.00	1.00	Complies

Test Mode :TX N20 Mode_CH01/06/11					
Frequency (MHz)	Average Power (dBm)	Average Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	8.98	0.0079	30.00	1.00	Complies
2437	12.03	0.0160	30.00	1.00	Complies
2462	9.35	0.0086	30.00	1.00	Complies


## APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION




Test Mode :TX B Mode\_CH01/06/11

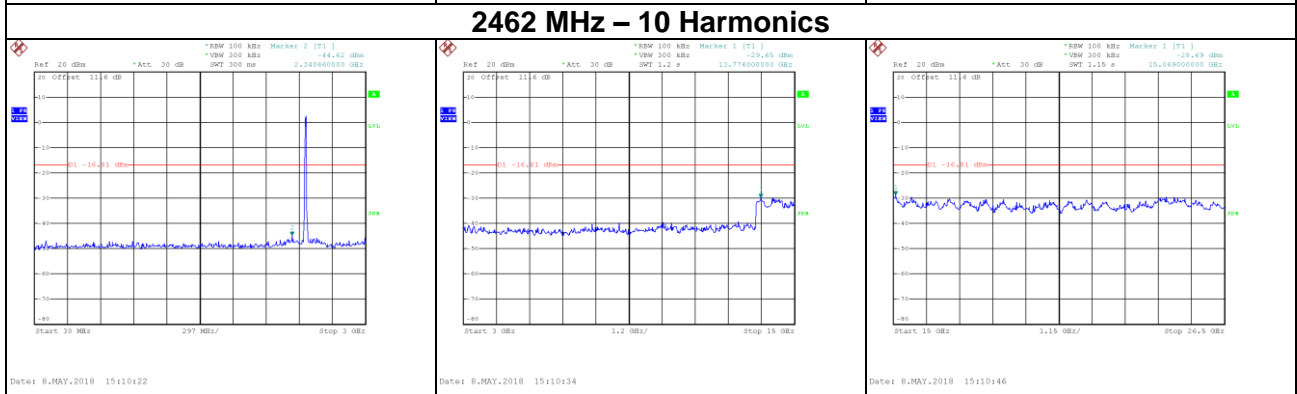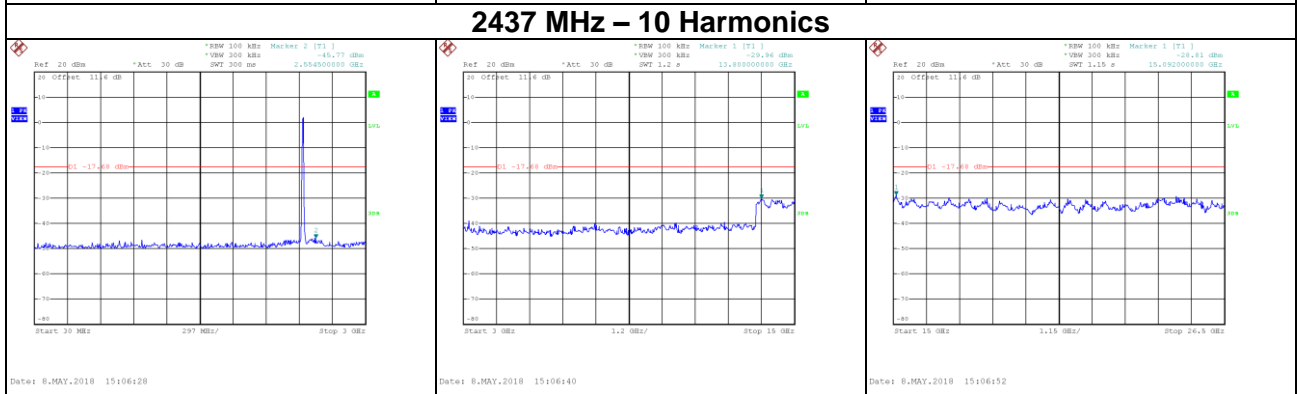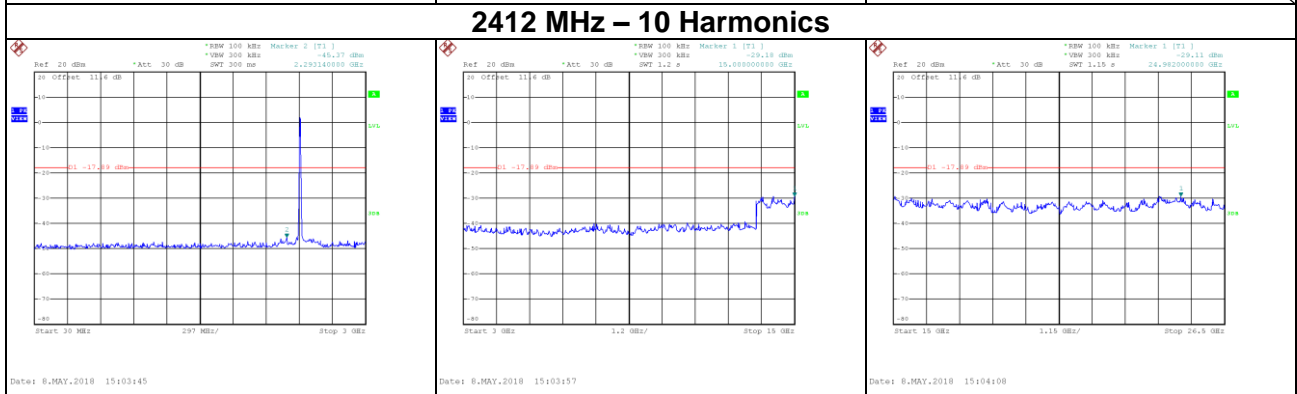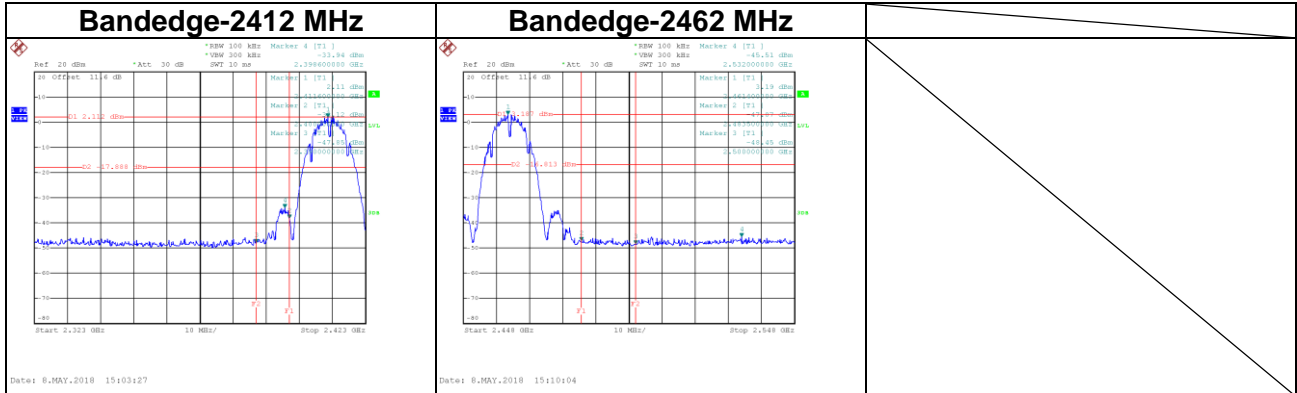


Test Mode :TX G Mode\_CH01/06/11

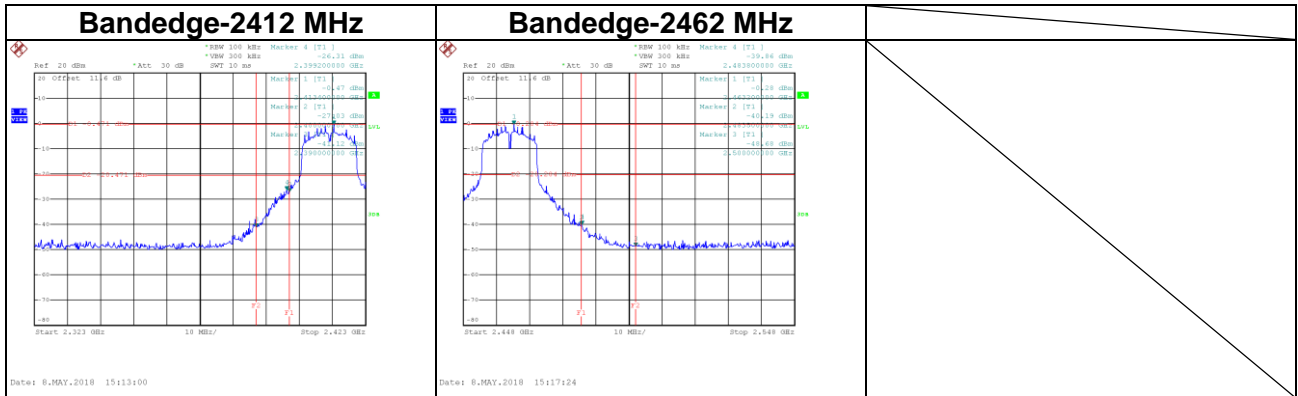


2412 MHz – 10 Harmonics

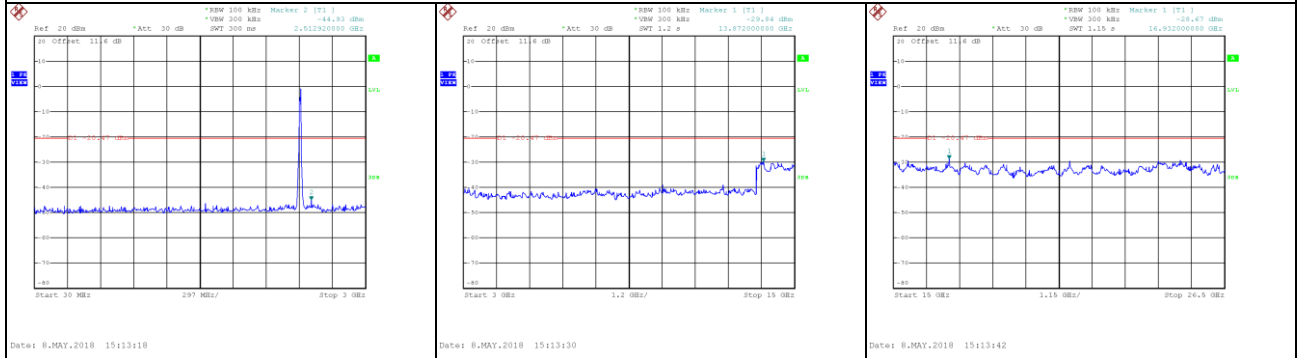





2437 MHz – 10 Harmonics

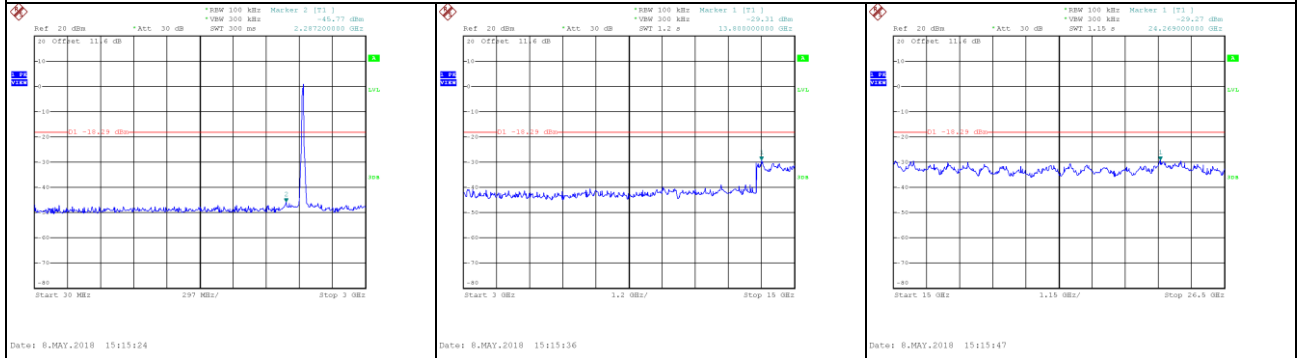

2462 MHz – 10 Harmonics

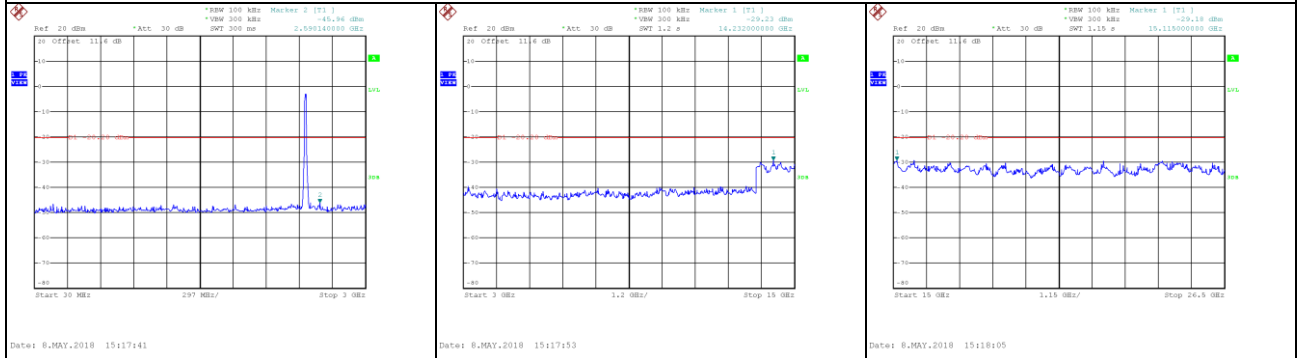


**Test Mode :TX N-20M Mode\_CH01/06/11**

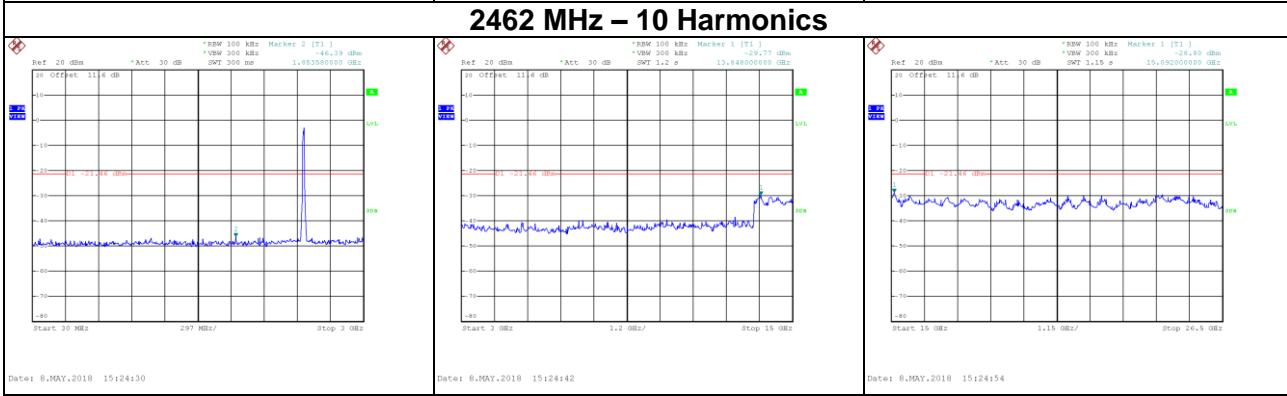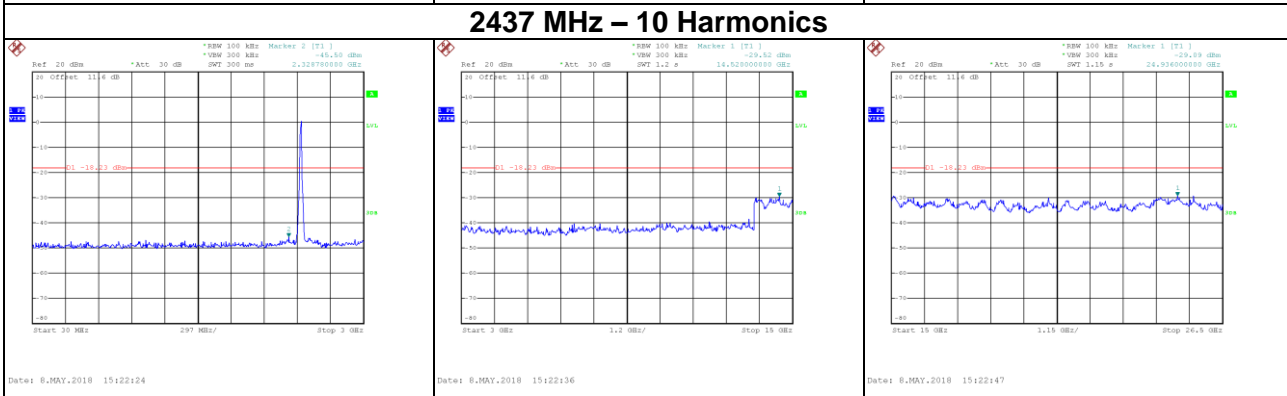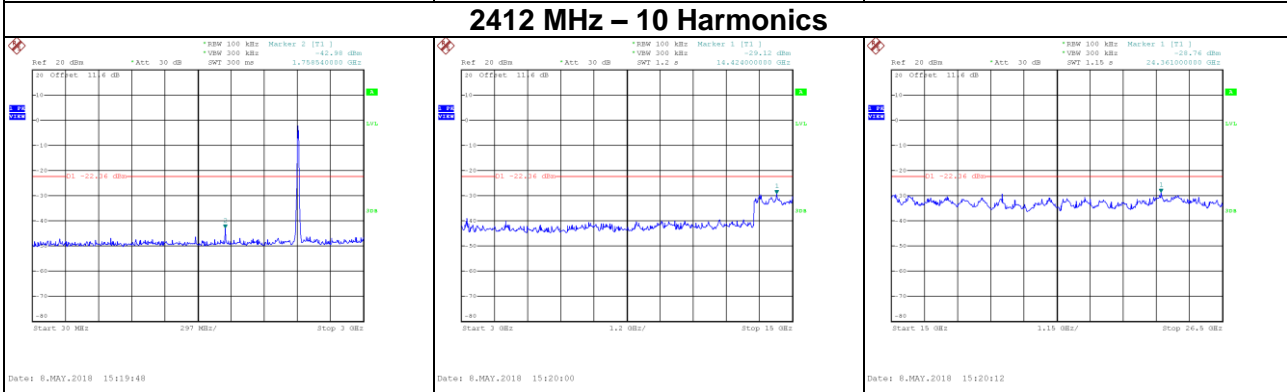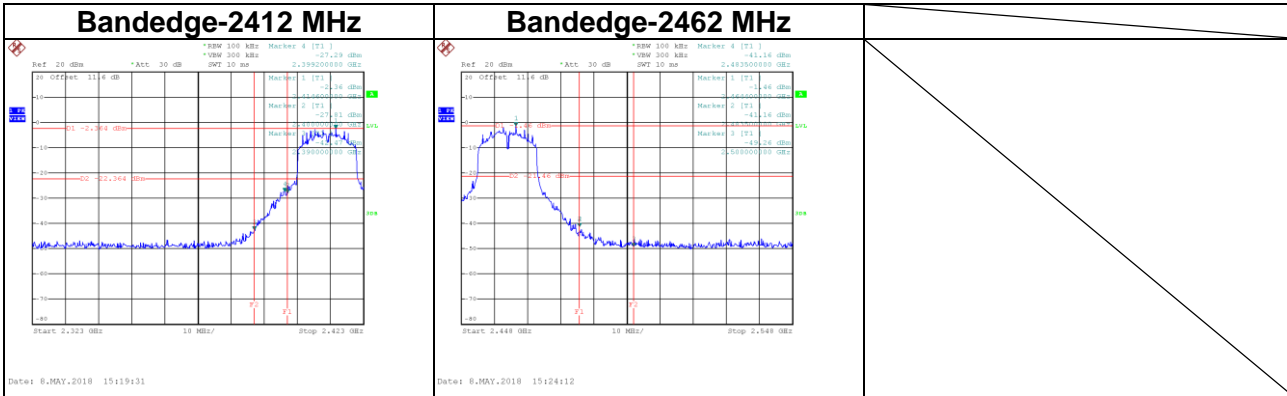

## APPENDIX H - POWER SPECTRAL DENSITY


**Test Mode :TX B Mode\_CH01/06/11**

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-12.54	0.06	8.00	Complies
2437	-12.07	0.06	8.00	Complies
2462	-11.89	0.06	8.00	Complies

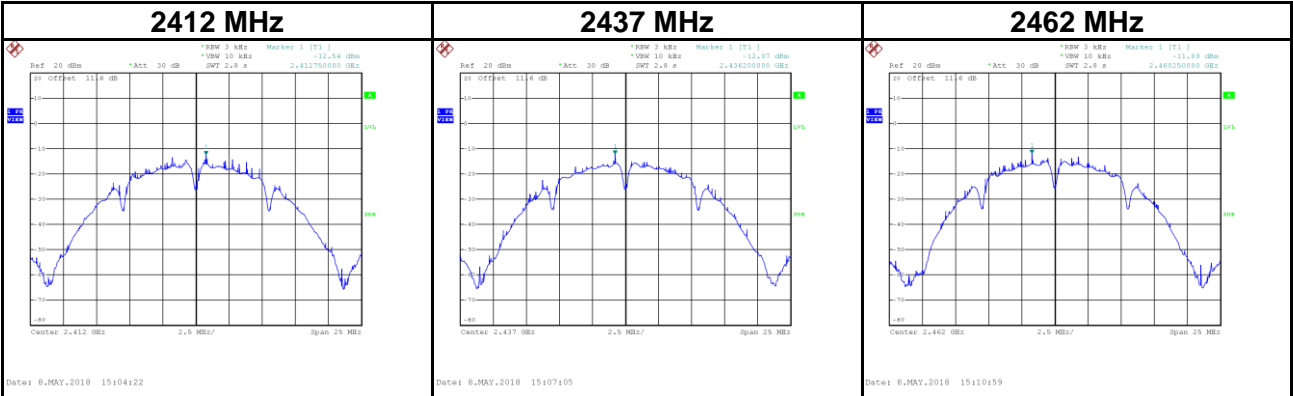

**Test Mode :TX G Mode\_CH01/06/11**

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-16.77	0.02	8.00	Complies
2437	-14.29	0.04	8.00	Complies
2462	-15.52	0.03	8.00	Complies

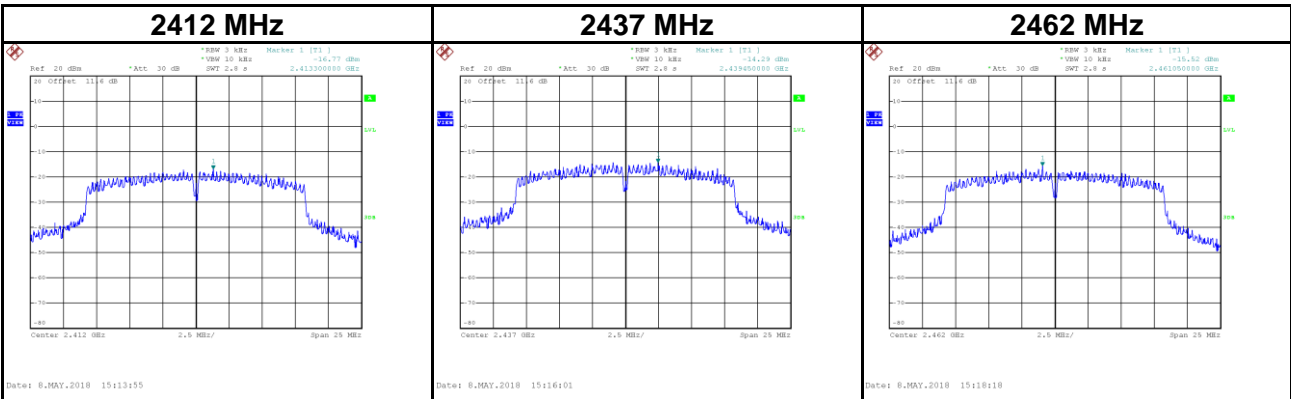

**Test Mode : TX N-20M Mode\_CH01/06/11**

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-17.48	0.02	8.00	Complies
2437	-14.39	0.04	8.00	Complies
2462	-17.07	0.02	8.00	Complies

