

# FCC Test Report

**FCC ID** : 2AEUPBHASC051  
**Equipment** : Stick Up Cam Wired  
**Brand Name** : Ring  
**Model Name** : Stick Up Cam Wired  
**Applicant** : Ring, Inc  
1523 26th St, Santa Monica, CA 90404, USA  
**Manufacturer** : Chicony Electronics (Dong Guan ) Co.,Ltd.  
San Zhong Guan Li Qu, Qingxi Town, Dongguan City  
Guangdong 523651 China  
**Standard** : 47 CFR FCC Part 15.247

The product was received on Jun. 01, 2018, and testing was started from Jun. 18, 2018 and completed on Aug. 15, 2018. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Allen Lin

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



# Table of Contents

**HISTORY OF THIS TEST REPORT .....3**

**SUMMARY OF TEST RESULT .....4**

**1 GENERAL DESCRIPTION .....5**

1.1 Information.....5

1.2 Testing Applied Standards .....7

1.3 Testing Location Information .....7

1.4 Measurement Uncertainty .....7

**2 TEST CONFIGURATION OF EUT.....8**

2.1 Test Condition .....8

2.2 Test Channel Mode .....8

2.3 The Worst Case Measurement Configuration.....9

2.4 Accessories and Support Equipment .....10

2.5 Test Setup Diagram .....10

**3 TRANSMITTER TEST RESULT .....12**

3.1 AC Power-line Conducted Emissions .....12

3.2 DTS Bandwidth.....14

3.3 Maximum Conducted Output Power .....15

3.4 Power Spectral Density .....17

3.5 Emissions in Non-restricted Frequency Bands .....18

3.6 Emissions in Restricted Frequency Bands.....19

**4 TEST EQUIPMENT AND CALIBRATION DATA.....23**

**APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS**

**APPENDIX B. TEST RESULTS OF DTS BANDWIDTH**

**APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER**

**APPENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY**

**APPENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS**

**APPENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS**

**APPENDIX G. TEST PHOTOS**

**PHOTOGRAPHS OF EUT V01**





### Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	FCC 15.203
3.1	15.207	AC Power-line Conducted Emissions	PASS	FCC 15.207
3.2	15.247(a)	DTS Bandwidth	PASS	≥500kHz
3.3	15.247(b)	Maximum Conducted Output Power	PASS	Power [dBm]:30
3.4	15.247(e)	Power Spectral Density	PASS	PSD [dBm/3kHz]:8
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	Non-Restricted Bands: >30 dBc
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	Restricted Bands: FCC 15.209

Reviewed by: Sam Tsai

Report Producer: Debby Hung

# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(1Mbps)	1.0	1TX

Note:

- ♦ Bluetooth LE uses a GFSK (1Mbps) modulation for DSSS.
- ♦ BWch is the nominal channel bandwidth.

### 1.1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector
1	1	-	Orion Wifi Antenna	PIFA Antenna	Fixed on board

2.4G		5G		BT	
Frequency (MHz)	Gain (dBi)	Frequency (MHz)	Gain (dBi)	Frequency (MHz)	Gain (dBi)
2412	0.94	5180	2.68	2402	0.94
2417	0.94	5200	2.68	2440	0.69
2422	0.94	5240	2.77	2480	0.10
2427	0.69	5190	2.68	-	-
2432	0.69	5230	2.77	-	-
2437	0.69	5745	3.12	-	-
2442	0.69	5785	2.65	-	-
2447	0.69	5825	1.67	-	-
2452	0.69	5755	3.12	-	-
2457	0.69	5795	2.65	-	-
2462	0.69	-	-	-	-

**For 2.4 GHz function:**

For IEEE 802.11b/g/n mode (1TX/1RX)

Only Ant. 1 (port 1) can be used as transmitting/receiving antenna.

**For 5 GHz function:**

For IEEE 802.11a/n mode (1TX/1RX)

Only Ant. 1 (port 1) can be used as transmitting/receiving antenna.

**For Bluetooth function:**

For Bluetooth mode (1TX/1RX)

Only Ant. 1 (port 1) can be used as transmitting/receiving antenna.



1.1.3 EUT Information

Operational Condition	
EUT Power Type	From AC Adapter
EUT Function	<input checked="" type="checkbox"/> Point-to-multipoint <input type="checkbox"/> Point-to-point
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device)
	Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems)
	Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

1.1.4 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
BT-LE(1Mbps)	0.626	2.034	391.25u	3k

## 1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ KDB 558074 D01 v04

## 1.3 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)		
		TEL : 886-3-327-3456	FAX : 886-3-327-0973	
Test site Designation No. TW1190 with FCC.				
<input type="checkbox"/>	JHUBEI	ADD : No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County, Taiwan (R.O.C.)		
		TEL : 886-3-656-9065	FAX : 886-3-656-9085	
Test site Designation No. TW0006 with FCC.				

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-HY	Andy	23.5°C / 65%	21/Jun/2018
Radiated <9k~30M>	03CH02-HY	Jeff	23.5°C / 60%	15/Aug/2018
Radiated <30M~1G>	03CH02-HY	Terry	23.1°C / 59%	18/Jun/2018
AC Conduction	CO04-HY	Andy	23.5°C / 53.8%	25/Jul/2018

## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.9 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.3 dB	Confidence levels of 95%
Temperature	0.7 °C	Confidence levels of 95%
Humidity	4 %	Confidence levels of 95%



## 2 Test Configuration of EUT

### 2.1 Test Condition

RF Conducted	Abbreviation	Remark
TnomVnom	Tnom	20°C
-	Vnom	120V

### 2.2 Test Channel Mode

Test Software	DoS
---------------	-----




Mode	Power Setting
BT-LE(1Mbps)	-
2402MHz	Default
2440MHz	Default
2480MHz	Default



### 2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral
<b>Operating Mode</b>	CTX
1	Adapter mode

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
<b>Test Condition</b>	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
<b>Tests Item</b>	Emissions in Restricted Frequency Bands		
<b>Test Condition</b>	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
<b>Operating Mode &lt; 1GHz</b>	CTX		
1	Adapter mode		
<b>Operating Mode &gt; 1GHz</b>	CTX		
<b>Orthogonal Planes of EUT</b>	<b>X Plane</b>	<b>Y Plane</b>	<b>Z Plane</b>
			
<b>Worst Planes of EUT</b>			V


## 2.4 Accessories and Support Equipment


Accessories				
Indoor Adapter	Brand Name	DEE VAN ENTERPRISE	Model Name	DSA-15CAB-05 050250
	Power Rating	I/P: <u>100</u> - <u>240</u> Vac, <u>0.5</u> A, O/P: <u>5</u> Vdc, <u>2.5</u> A		
USB cable	Power Cord	<u>2.45</u> meter, non-shielded cable, w/o ferrite core		

Reminder: Regarding to more detail and other information, please refer to user manual.

Support Equipment - RF Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5410	DoC
2	Adapter for NB	DELL	HA65NM130	DoC
3	AC Power Source	G.W	APS-9102	-

## 2.5 Test Setup Diagram

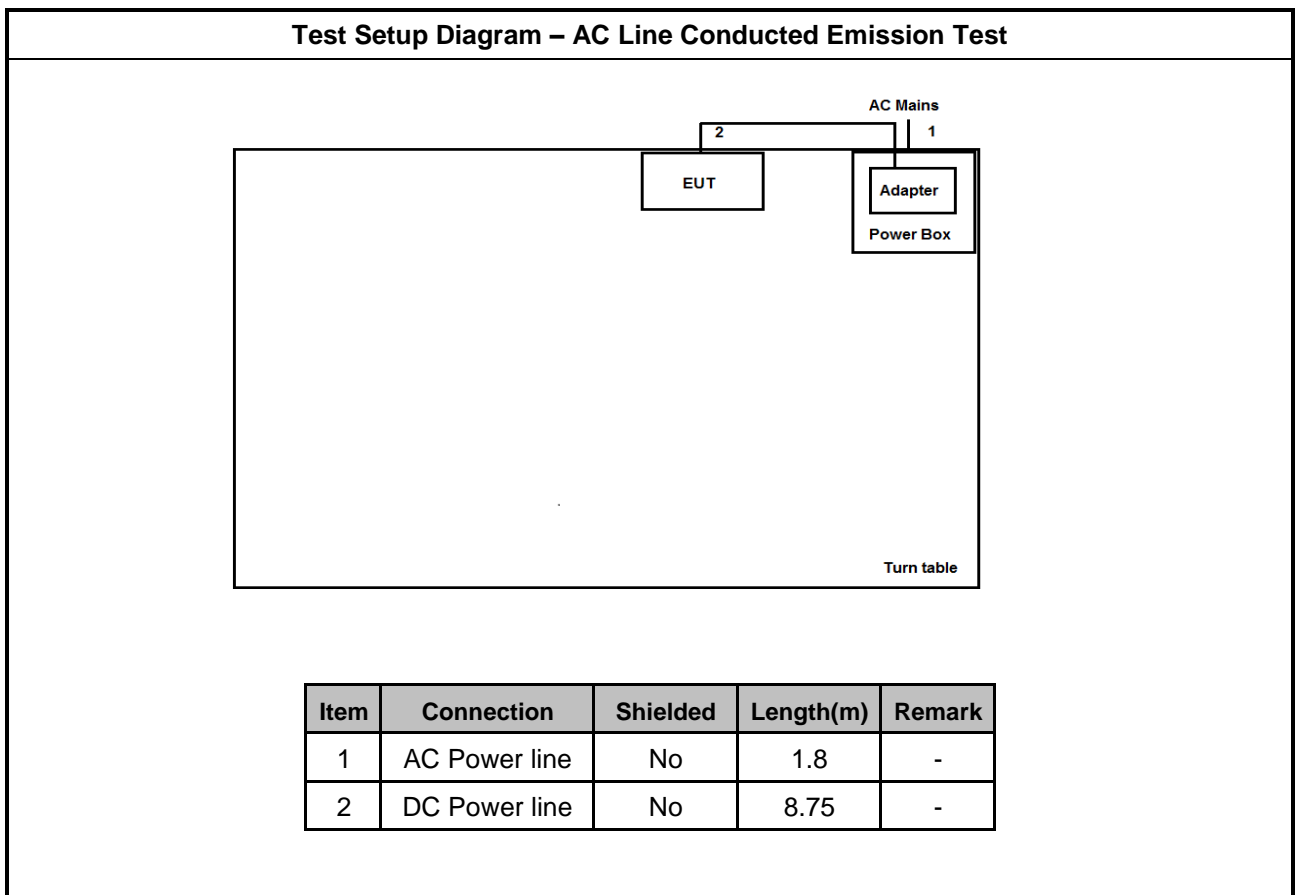

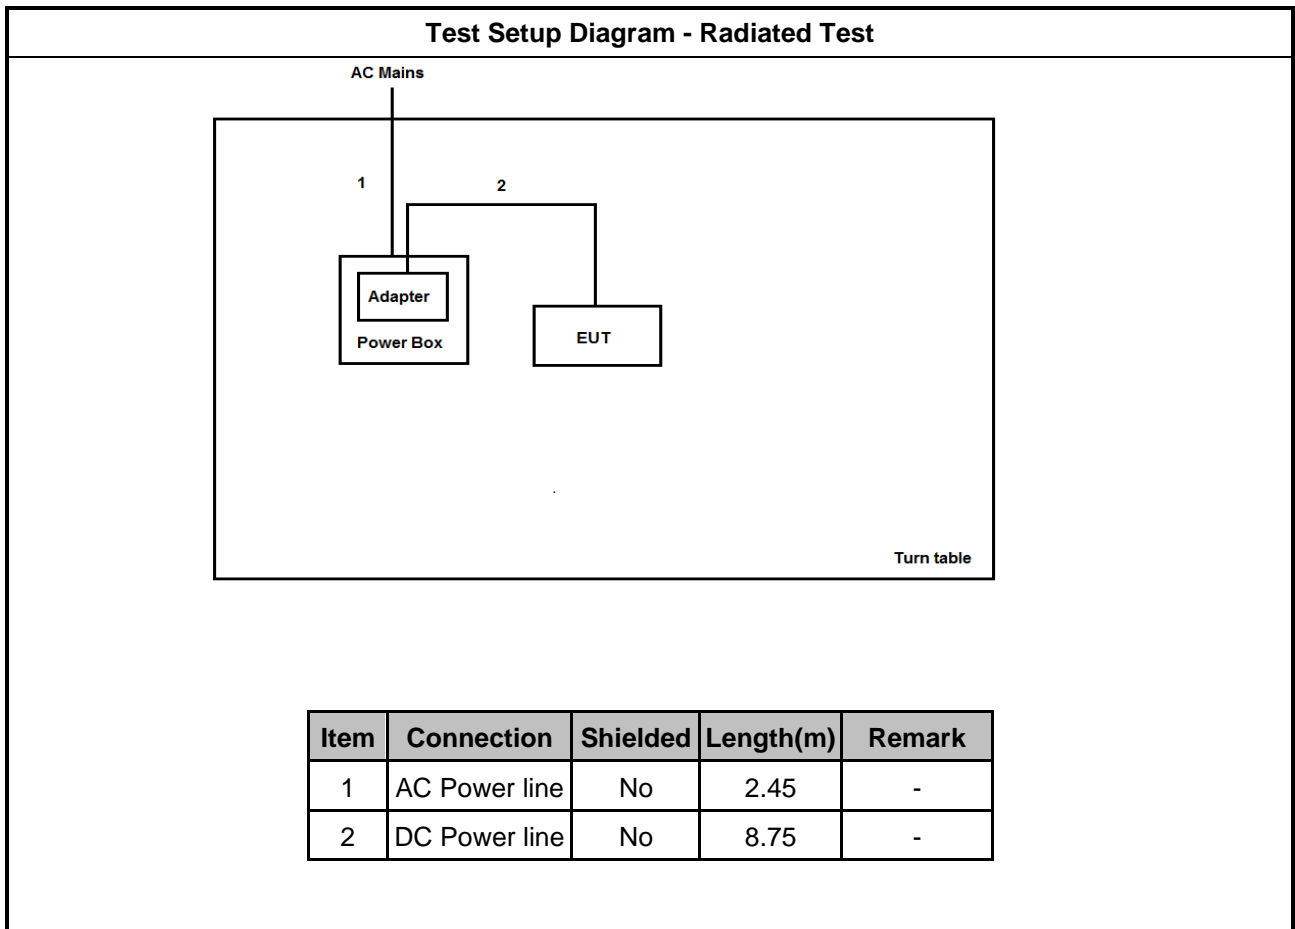

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Refer as ANSI C63.10-2013, clause 6.2 foray power-line conducted emissions.</li> </ul>

##### 3.1.4 Test Setup

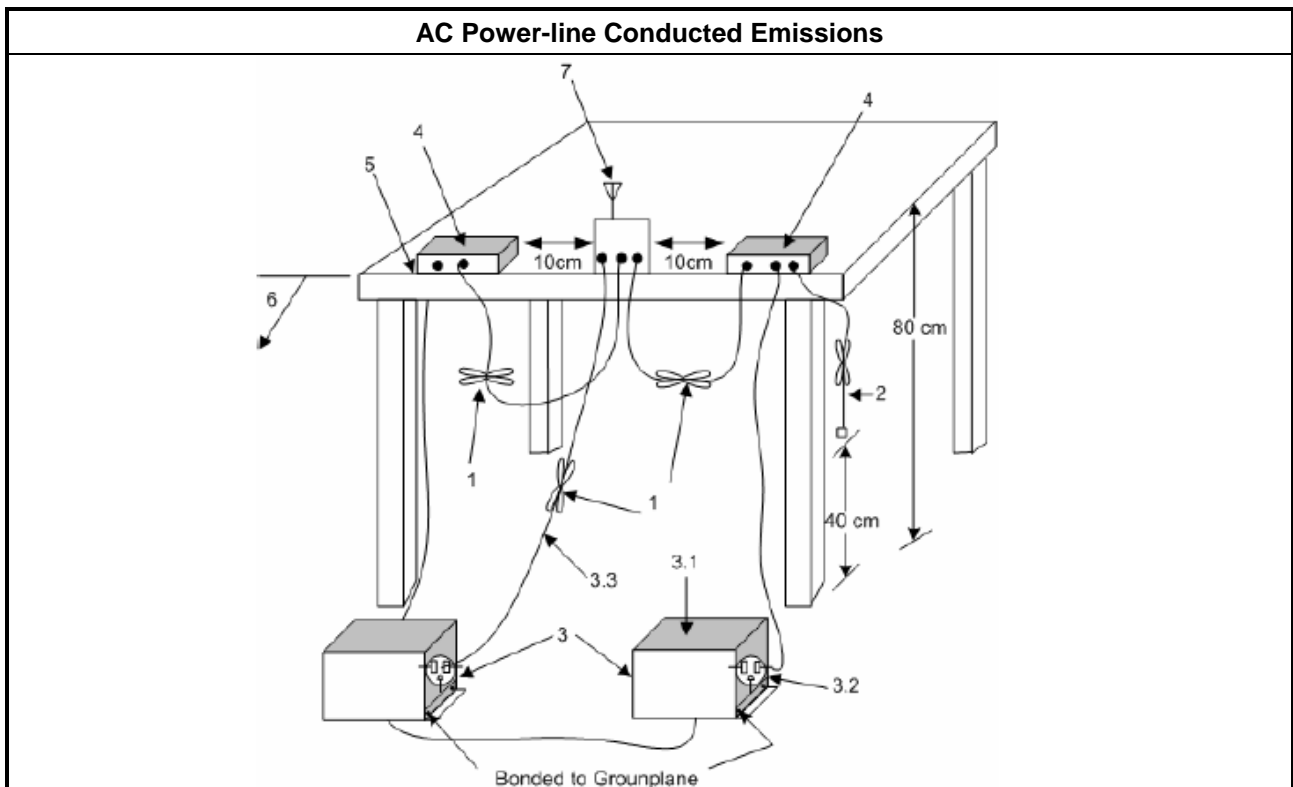



### **3.1.5 Test Result of AC Power-line Conducted Emissions**

Refer as Appendix A

### 3.2 DTS Bandwidth

#### 3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
<b>Systems using digital modulation techniques:</b>
<ul style="list-style-type: none"> <li>▪ 6 dB bandwidth <math>\geq</math> 500 kHz.</li> </ul>


#### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.2.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>▪ For the emission bandwidth shall be measured using one of the options below:</li> </ul>
<input checked="" type="checkbox"/> Refer as KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as RSS-Gen, clause 6.7 for for occupied bandwidth testing.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.

#### 3.2.4 Test Setup

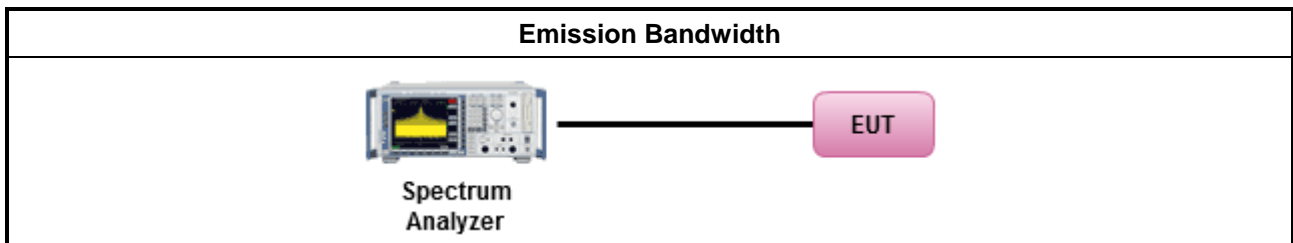

#### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

### 3.3 Maximum Conducted Output Power

#### 3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	<ul style="list-style-type: none"> <li>▪ If <math>G_{TX} \leq 6</math> dBi, then <math>P_{Out} \leq 30</math> dBm (1 W)</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-point systems (P2P): If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Smart antenna system (SAS):</li> </ul>
	<ul style="list-style-type: none"> <li>- Single beam: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Overlap beam: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Aggregate power on all beams: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3 + 8</math> dB dBm</li> </ul>
<b>e.i.r.p. Power Limit:</b>	
	<ul style="list-style-type: none"> <li>▪ 2400-2483.5 MHz Band</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): <math>P_{eirp} \leq 36</math> dBm (4 W)</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-point systems (P2P): <math>P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Smart antenna system (SAS)</li> </ul>
	<ul style="list-style-type: none"> <li>- Single beam: <math>P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Overlap beam: <math>P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Aggregate power on all beams: <math>P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])</math> dBm</li> </ul>
$P_{Out}$ = maximum peak conducted output power or maximum conducted output power in dBm, $G_{TX}$ = the maximum transmitting antenna directional gain in dBi.	


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>▪ Maximum Peak Conducted Output Power</li> </ul>	
<input type="checkbox"/>	Refer as KDB 558074, clause 9.1.1 Option 1 (RBW ≥ EBW method).
<input type="checkbox"/>	Refer as KDB 558074, clause 9.1.2 Option 2 (integrated band power method)
<input type="checkbox"/>	Refer as KDB 558074, clause 9.1.3 Option 3 (peak power meter for VBW ≥ DTS BW)
<ul style="list-style-type: none"> <li>▪ Maximum Average Conducted Output Power</li> </ul>	
Duty cycle ≥ 98%	
<input type="checkbox"/>	Refer as KDB 558074, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging).
Duty cycle < 98%	
<input type="checkbox"/>	Refer as KDB 558074, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
RF power meter and average over on/off periods with duty factor or gated trigger	
<input checked="" type="checkbox"/>	Refer as KDB 558074, clause 9.2.3.1 Method AVGPM (using an RF average power meter).
<ul style="list-style-type: none"> <li>▪ For conducted measurement.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ If multiple transmit chains, EIRP calculation could be following as methods:  <math>P_{total} = P_1 + P_2 + \dots + P_n</math>                      (calculated in linear unit [mW] and transfer to log unit [dBm])  <math>EIRP_{total} = P_{total} + DG</math> </li> </ul>	

### 3.3.4 Test Setup

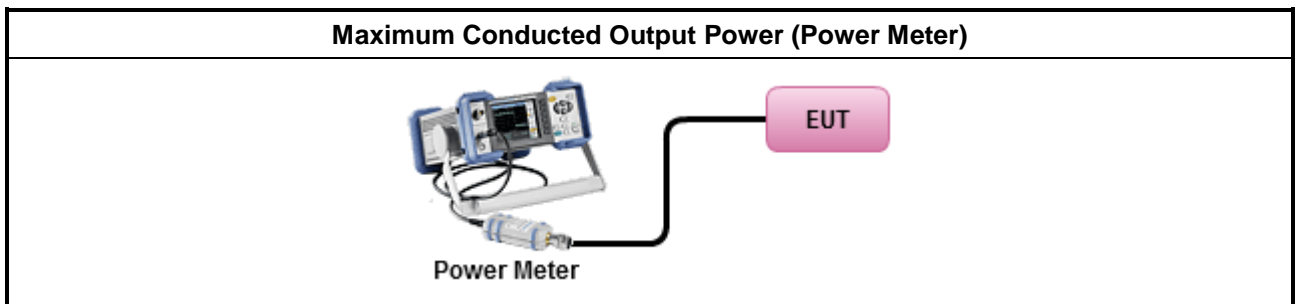

### 3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



### 3.4 Power Spectral Density

#### 3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<ul style="list-style-type: none"> <li>Power Spectral Density (PSD) ≤ 8 dBm/3kHz</li> </ul>


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).</li> </ul>
<input checked="" type="checkbox"/> Refer as KDB 558074, clause 10.2 Method PKPSD (RBW=3-100kHz; Detector=peak).
<ul style="list-style-type: none"> <li>For conducted measurement.             <ul style="list-style-type: none"> <li>If The EUT supports multiple transmit chains using options given below:                 <ul style="list-style-type: none"> <li>Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.</li> </ul> </li> </ul> </li> </ul>

#### 3.4.4 Test Setup

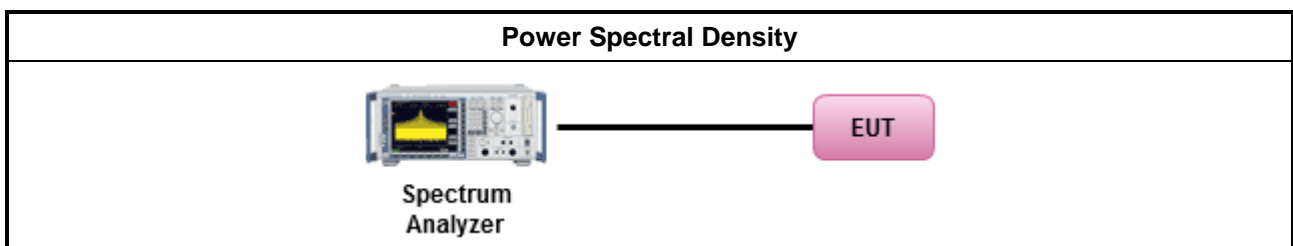

#### 3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

### 3.5 Emissions in Non-restricted Frequency Bands

#### 3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Refer as KDB 558074, clause 11 for unwanted emissions into non-restricted bands.</li> </ul>

#### 3.5.4 Test Setup

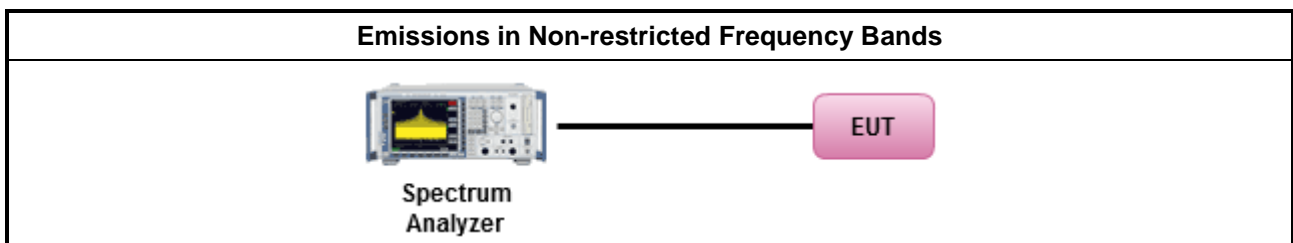

#### 3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

### 3.6 Emissions in Restricted Frequency Bands

#### 3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.


#### 3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

### 3.6.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>▪ The average emission levels shall be measured in [duty cycle <math>\geq</math> 98 or duty factor].</li> </ul>	
<ul style="list-style-type: none"> <li>▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ For the transmitter unwanted emissions shall be measured using following options below:</li> </ul>	
<ul style="list-style-type: none"> <li>▪ Refer as KDB 558074, clause 12 for unwanted emissions into restricted bands.</li> </ul>	
	<input checked="" type="checkbox"/> Refer as KDB 558074, clause 12.2.5.3 (ANSI C63.10, clause 4.1.4.2.3), Reduced VBW $\geq$ 1/T.
	<input checked="" type="checkbox"/> Refer as KDB 558074, clause 12.2.4 measurement procedure peak limit.
<ul style="list-style-type: none"> <li>▪ For the transmitter band-edge emissions shall be measured using following options below:</li> </ul>	
	<ul style="list-style-type: none"> <li>▪ Refer as KDB 558074 clause 13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Refer as KDB 558074, clause 13.2 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Refer as KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).</li> </ul>
<ul style="list-style-type: none"> <li>▪ For conducted and cabinet radiation measurement, refer as KDB 558074, clause 12.2.2.</li> </ul>	
	<ul style="list-style-type: none"> <li>▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB</li> </ul>
	<ul style="list-style-type: none"> <li>▪ For KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.</li> </ul>

### 3.6.4 Test Setup

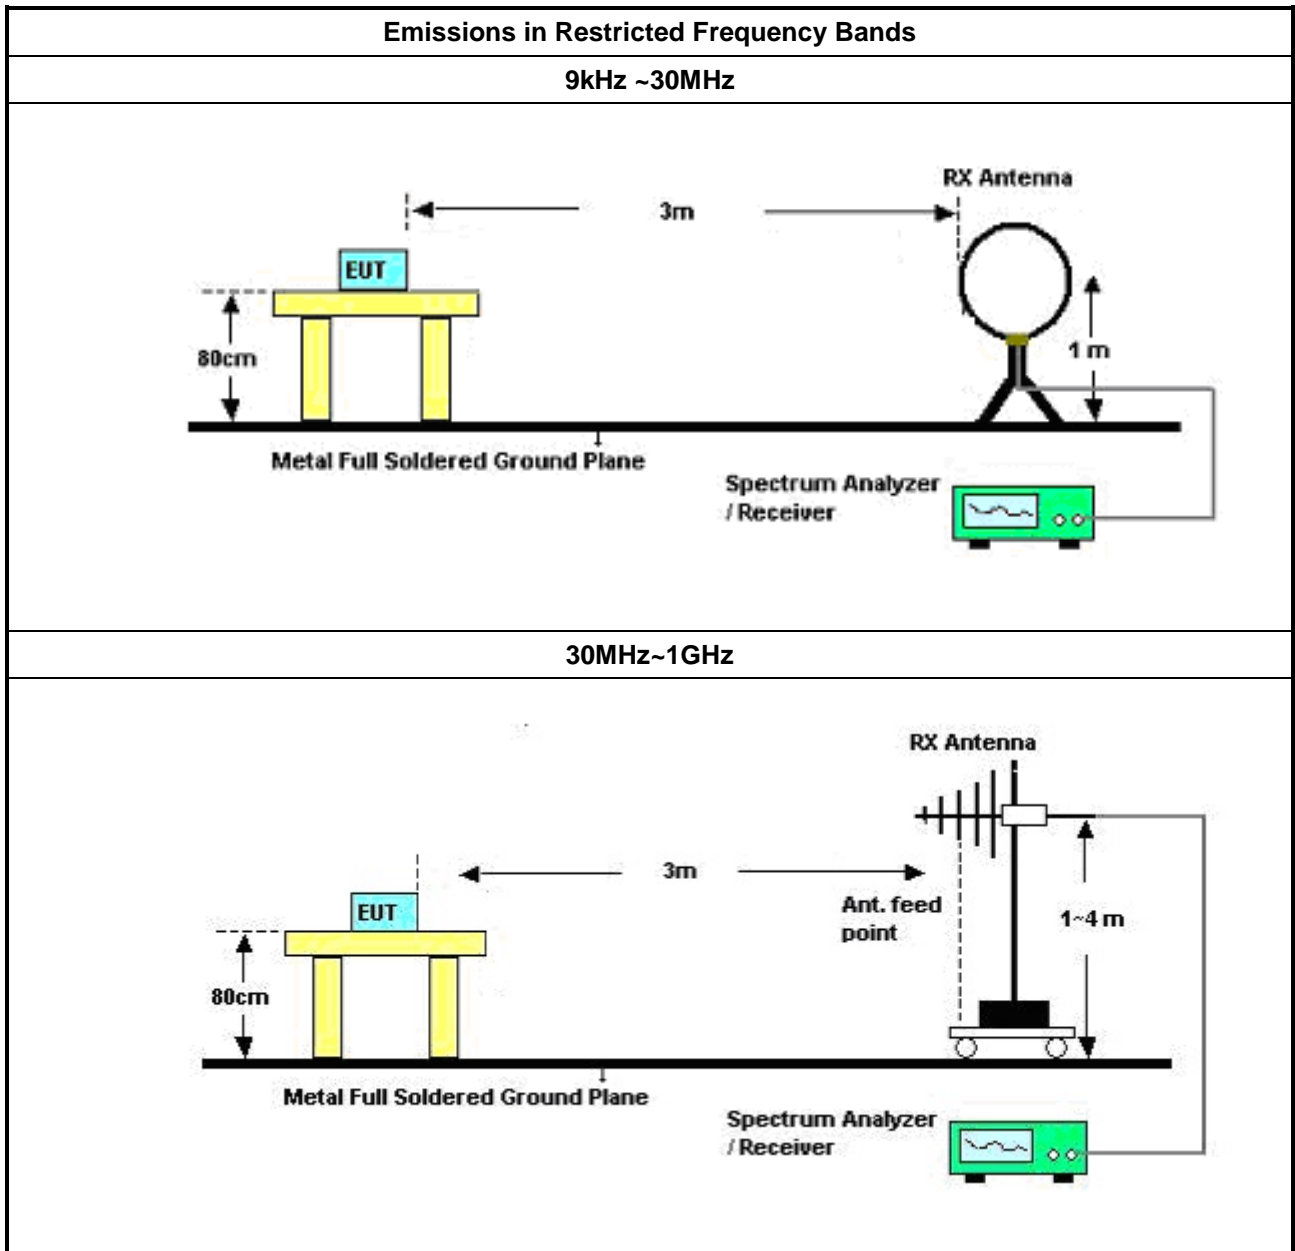

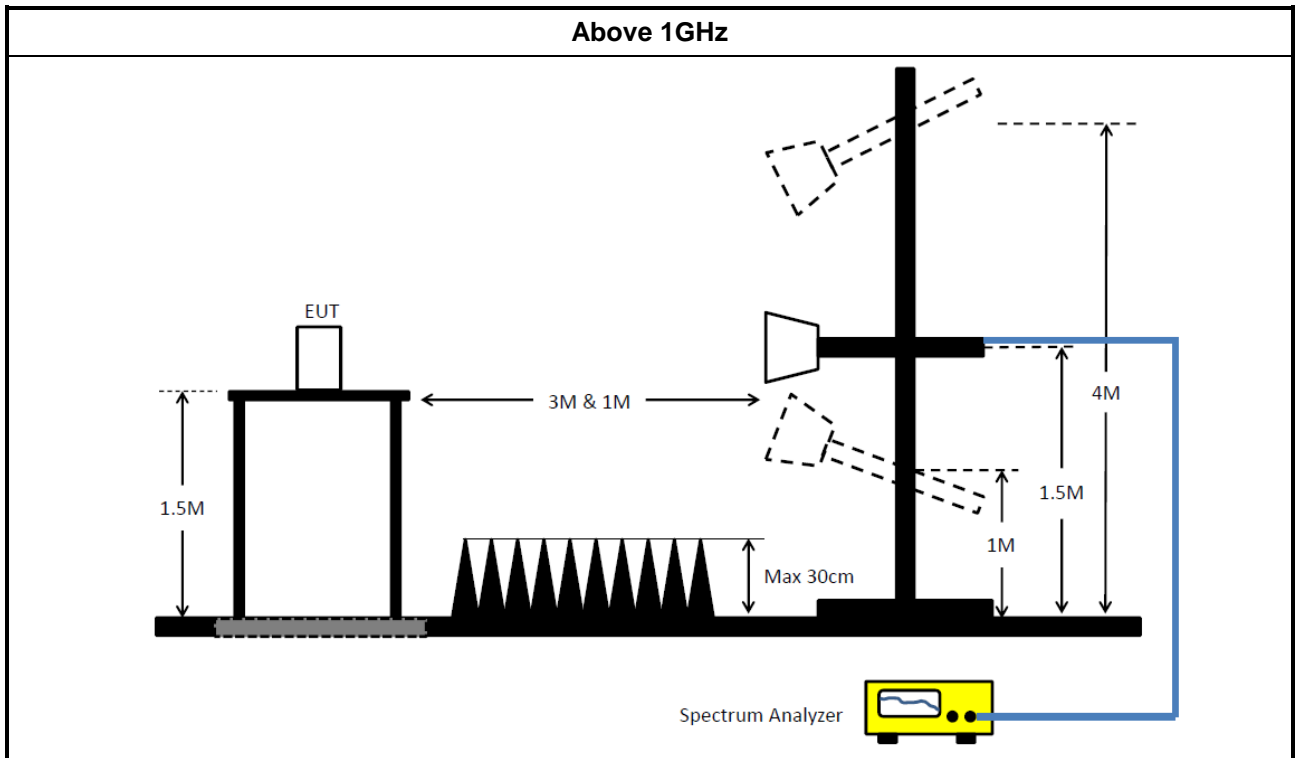

### 3.6.5 Test Result of Emissions in Restricted Frequency Bands (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

### 3.6.6 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F

## 4 Test Equipment and Calibration Data

### Instrument for AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMC Receiver	R&S	ESR	102051	9KHz ~ 3.6GHz	03/May/2018	02/May/2019
LISN	R&S	ENV216	101295	9kHz ~ 30MHz	17/Nov/2017	16/Nov/2018
RF Cable-CON	HUBER+SUHNER	RG213/U	0761183202000 1	9kHz ~ 30MHz	06/Oct/2017	05/Oct/2018
AC POWER	APC	AFC-11005G	F310050055	47Hz~63Hz 5~300V	NCR	NCR
Impuls Begrenzer Puls e Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9 kHz ~ 30 MHz	12/Oct/2017	11/Oct/2018

NCR : Non-Calibration Require

### Instrument for Radiated Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	20/Oct/2017	19/Oct/2018
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	1GHz ~ 18GHz 3m	27/Oct/2017	26/Oct/2018
Amplifier	Agilent	8447D	2944A11149	100kHz ~ 1.3GHz	29Jun/2017	28/Jun/2018
Microwave Preamplifier	Agilent	8449B	3008A02373	1GHz ~ 26.5GHz	28/Sep/2017	27/Sep/2018
Spectrum Analyzer	Rohde & Schwarz	FSP40	100593	9KHz - 40GHz	12/Dec/2017	11/Dec/2018
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100354	9kHz ~ 2.75GHz	08/Dec/2017	07/Dec/2018
RF Cable-R03m	Jye Bao	RG142	CB017	9kHz ~ 1GHz	19/Jan/2018	18/Jan/2019
RF Cable-high	SUHNER	SUCOFLEX104	MY34918/4	1GHz ~ 40GHz	19/Jan/2018	18/Jan/2019
Bilog Antenna	SCHAFFNER	CBL 6112B	2723	30MHz ~ 1GHz	09/Sep/2017	08/Sep/2018
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170154	18GHz ~ 40GHz	06/Feb/2018	05/Feb/2019
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120D	BBHA 9120 D 1543	1GHz ~ 18GHz	11/May/ 2018	10/May/2019
Preamplifier	MITEQ	TTA1840-35-HG	1864481	18GHz ~ 40GHz	31/Aug/2017	30/Aug/2018
Loop Antenna	TESEQ	HLA 6120	31244	9k-30MHz	29/Mar/2018	28/Mar/2019



Instrument for Conducted Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101515	9kHz~40GHz	08/Dec/2017	07/Dec/2018
Power Sensor	Anritsu	MA2411B	1339407	300MHz ~ 40GHz	06/Nov/2017	05/Nov/2018
Power Meter	Anritsu	ML2495A	1517010	300MHz ~ 40GHz	06/Nov/2017	05/Nov/2018
RF Cable-0.2m	HUBER+SUHNER	SUCOFLEX_104	MY10710/4	30MHz ~ 26.5GHz	25/Aug/2017	24/Aug/2018
RF Cable-0.2m	HUBER+SUHNER	SUCOFLEX_104	MY10709/4	30MHz ~ 26.5GHz	25/Aug/2017	24/Aug/2018
RF Cable-1m	HUBER+SUHNER	SUCOFLEX_104	MY37333/4	30MHz ~ 26.5GHz	26/Jan/2018	25/Jan/2019
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	27/Jul/2017	26/Jul/2018






AC Power-line Conducted Emissions Result																																																																																																																								
Operating Mode	1	Power Phase	Neutral																																																																																																																					
Operating Function	Adapter mode - TX																																																																																																																							
<div style="text-align: right;">Date: 2018-07-25</div> <p>The graph displays the AC power-line conducted emissions. The y-axis represents Level in dBuV, ranging from 0 to 80. The x-axis represents Frequency in MHz, ranging from 0.150.2 to 30. Two red lines indicate the limits: NCC/IC/FCC-B (upper) and NCC/IC/FCC-B-AV (lower). A blue line shows the measured emission levels, with several peaks marked by vertical blue lines and numbered 1 through 12. The peak at 0.48 MHz is the highest, exceeding the NCC/IC/FCC-B-AV limit.</p> <table border="1"> <thead> <tr> <th>Peak No.</th> <th>Freq (MHz)</th> <th>Level (dBuV)</th> <th>Over Limit (dB)</th> <th>Limit Line (dBuV)</th> <th>Read Level (dBuV)</th> <th>LISN Factor (dB)</th> <th>Cable Loss (dB)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>0.42</td><td>26.96</td><td>-20.55</td><td>47.51</td><td>17.25</td><td>9.61</td><td>0.10</td><td>Average</td></tr> <tr><td>2</td><td>0.42</td><td>38.54</td><td>-18.97</td><td>57.51</td><td>28.83</td><td>9.61</td><td>0.10</td><td>QP</td></tr> <tr><td>3 MAX</td><td>0.48</td><td>34.39</td><td>-11.93</td><td>46.32</td><td>24.70</td><td>9.61</td><td>0.08</td><td>Average</td></tr> <tr><td>4</td><td>0.48</td><td>43.38</td><td>-12.94</td><td>56.32</td><td>33.69</td><td>9.61</td><td>0.08</td><td>QP</td></tr> <tr><td>5</td><td>1.37</td><td>26.68</td><td>-19.32</td><td>46.00</td><td>17.06</td><td>9.62</td><td>0.00</td><td>Average</td></tr> <tr><td>6</td><td>1.37</td><td>36.60</td><td>-19.40</td><td>56.00</td><td>26.98</td><td>9.62</td><td>0.00</td><td>QP</td></tr> <tr><td>7</td><td>1.97</td><td>26.19</td><td>-19.81</td><td>46.00</td><td>16.56</td><td>9.63</td><td>0.00</td><td>Average</td></tr> <tr><td>8</td><td>1.97</td><td>37.45</td><td>-18.55</td><td>56.00</td><td>27.82</td><td>9.63</td><td>0.00</td><td>QP</td></tr> <tr><td>9</td><td>2.68</td><td>24.09</td><td>-21.91</td><td>46.00</td><td>14.42</td><td>9.63</td><td>0.04</td><td>Average</td></tr> <tr><td>10</td><td>2.68</td><td>36.15</td><td>-19.85</td><td>56.00</td><td>26.48</td><td>9.63</td><td>0.04</td><td>QP</td></tr> <tr><td>11</td><td>4.31</td><td>23.97</td><td>-22.03</td><td>46.00</td><td>14.23</td><td>9.64</td><td>0.10</td><td>Average</td></tr> <tr><td>12</td><td>4.31</td><td>35.02</td><td>-20.98</td><td>56.00</td><td>25.28</td><td>9.64</td><td>0.10</td><td>QP</td></tr> </tbody> </table>				Peak No.	Freq (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Read Level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Remark	1	0.42	26.96	-20.55	47.51	17.25	9.61	0.10	Average	2	0.42	38.54	-18.97	57.51	28.83	9.61	0.10	QP	3 MAX	0.48	34.39	-11.93	46.32	24.70	9.61	0.08	Average	4	0.48	43.38	-12.94	56.32	33.69	9.61	0.08	QP	5	1.37	26.68	-19.32	46.00	17.06	9.62	0.00	Average	6	1.37	36.60	-19.40	56.00	26.98	9.62	0.00	QP	7	1.97	26.19	-19.81	46.00	16.56	9.63	0.00	Average	8	1.97	37.45	-18.55	56.00	27.82	9.63	0.00	QP	9	2.68	24.09	-21.91	46.00	14.42	9.63	0.04	Average	10	2.68	36.15	-19.85	56.00	26.48	9.63	0.04	QP	11	4.31	23.97	-22.03	46.00	14.23	9.64	0.10	Average	12	4.31	35.02	-20.98	56.00	25.28	9.64	0.10	QP
Peak No.	Freq (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Read Level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Remark																																																																																																																
1	0.42	26.96	-20.55	47.51	17.25	9.61	0.10	Average																																																																																																																
2	0.42	38.54	-18.97	57.51	28.83	9.61	0.10	QP																																																																																																																
3 MAX	0.48	34.39	-11.93	46.32	24.70	9.61	0.08	Average																																																																																																																
4	0.48	43.38	-12.94	56.32	33.69	9.61	0.08	QP																																																																																																																
5	1.37	26.68	-19.32	46.00	17.06	9.62	0.00	Average																																																																																																																
6	1.37	36.60	-19.40	56.00	26.98	9.62	0.00	QP																																																																																																																
7	1.97	26.19	-19.81	46.00	16.56	9.63	0.00	Average																																																																																																																
8	1.97	37.45	-18.55	56.00	27.82	9.63	0.00	QP																																																																																																																
9	2.68	24.09	-21.91	46.00	14.42	9.63	0.04	Average																																																																																																																
10	2.68	36.15	-19.85	56.00	26.48	9.63	0.04	QP																																																																																																																
11	4.31	23.97	-22.03	46.00	14.23	9.64	0.10	Average																																																																																																																
12	4.31	35.02	-20.98	56.00	25.28	9.64	0.10	QP																																																																																																																
<p>Note 1: "&gt;20dB" means emission levels that exceed the level of 20 dB below the applicable limit.            Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)</p>																																																																																																																								



AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Adapter mode - TX		

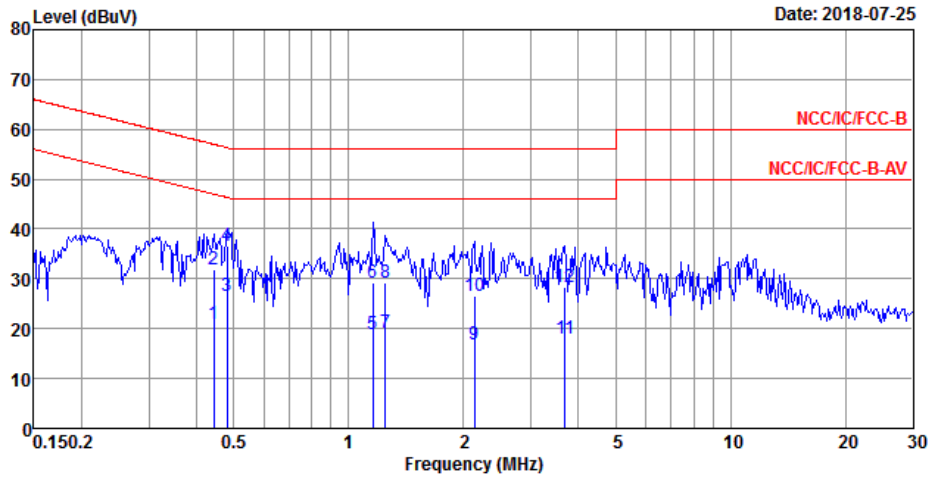

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.44	21.08	-25.90	46.98	11.38	9.61	0.09	Average
2	0.44	31.75	-25.23	56.98	22.05	9.61	0.09	QP
3	0.48	26.54	-19.78	46.32	16.85	9.61	0.08	Average
4 MAX	0.48	36.54	-19.78	56.32	26.85	9.61	0.08	QP
5	1.16	18.92	-27.08	46.00	9.31	9.61	0.00	Average
6	1.16	29.37	-26.63	56.00	19.76	9.61	0.00	QP
7	1.25	19.33	-26.67	46.00	9.72	9.61	0.00	Average
8	1.25	29.29	-26.71	56.00	19.68	9.61	0.00	QP
9	2.13	16.82	-29.18	46.00	7.19	9.62	0.01	Average
10	2.13	26.62	-29.38	56.00	16.99	9.62	0.01	QP
11	3.68	17.91	-28.09	46.00	8.20	9.63	0.08	Average
12	3.68	28.30	-27.70	56.00	18.59	9.63	0.08	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)



**Summary**


Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	713.75k	1.053M	1M05F1D	710k	1.053M

**Max-N dB** = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;  
**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

**Result**

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz_TnomVnom	Pass	500k	710k	1.053M
2440MHz_TnomVnom	Pass	500k	713.75k	1.053M
2480MHz_TnomVnom	Pass	500k	712.5k	1.053M

**Port X-N dB** = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

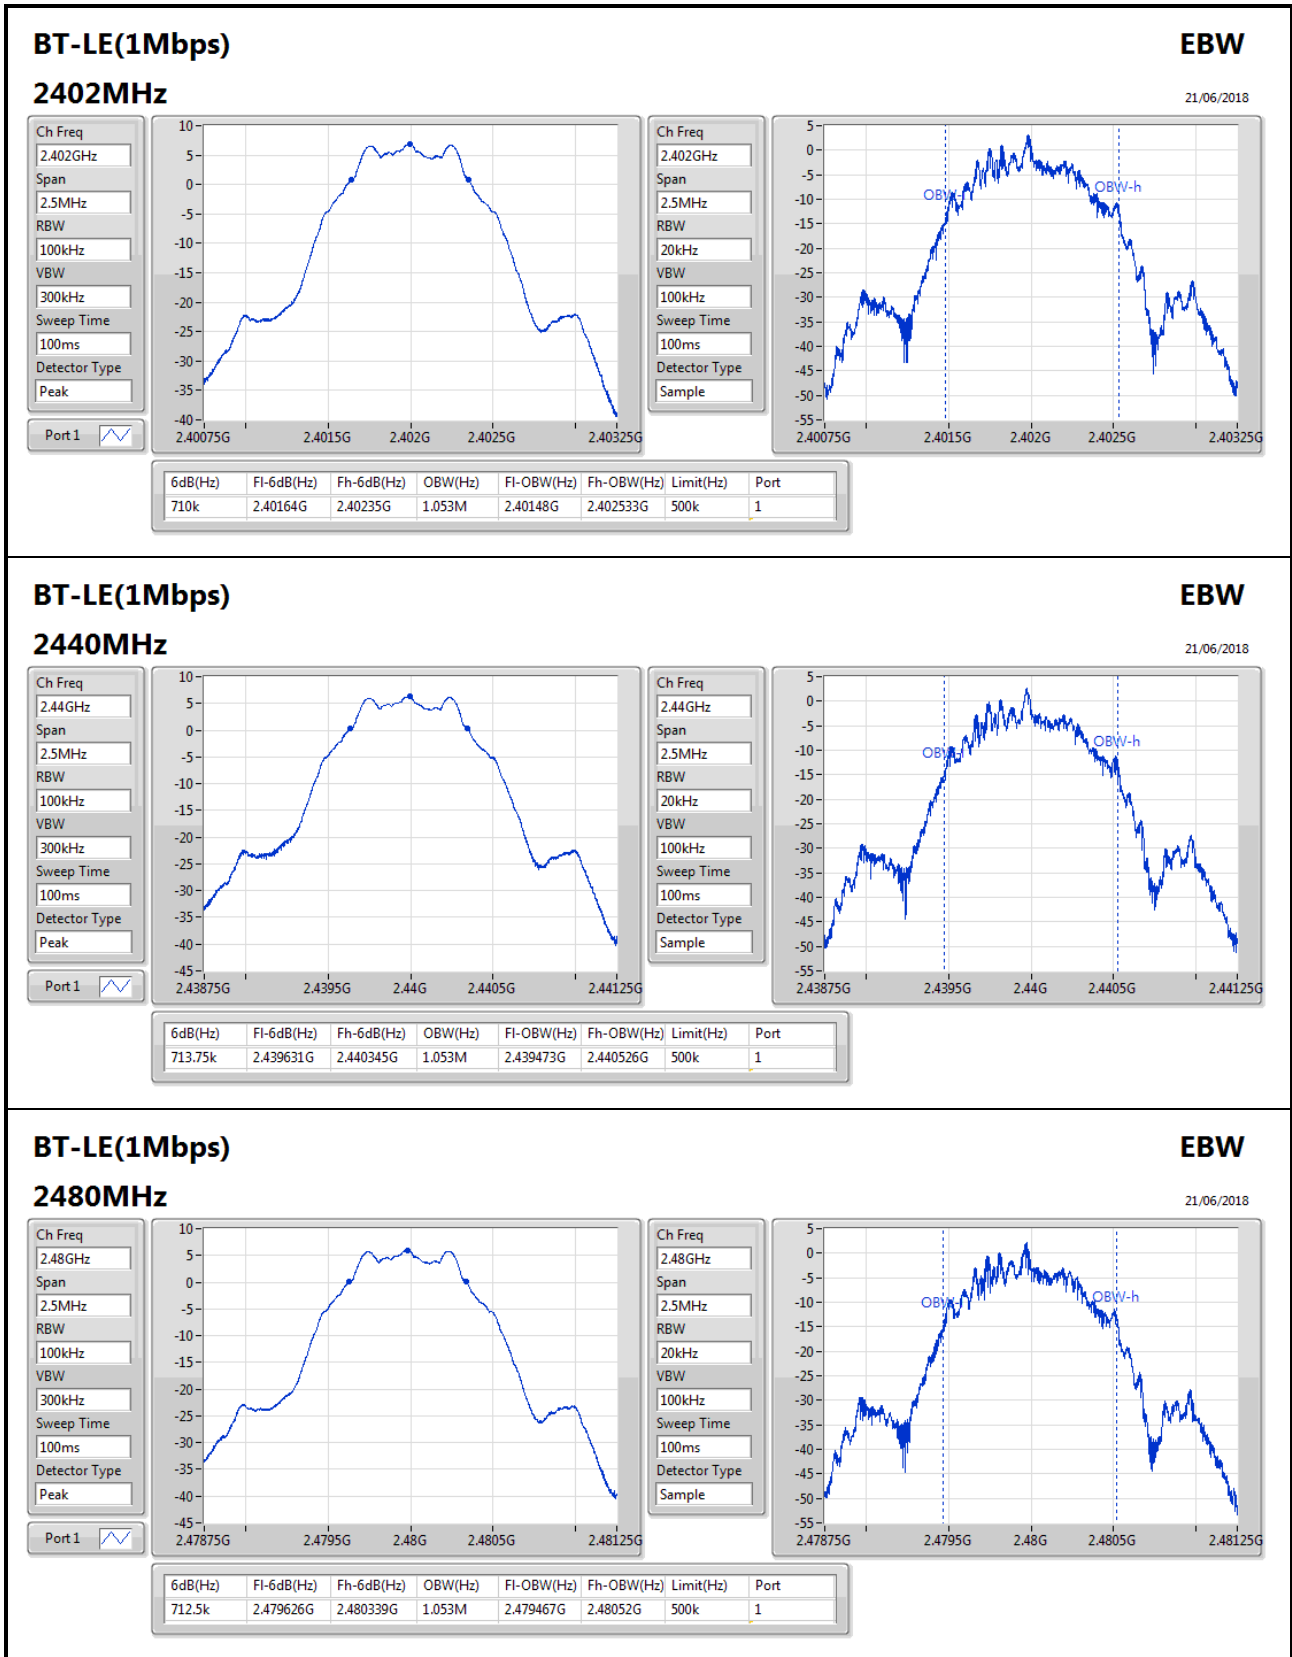
**BT-LE(1Mbps)**
**EBW**

21/06/2018

**2480MHz**

Ch Freq: 2.48GHz  
Span: 2.5MHz  
RBW: 100kHz  
VBW: 300kHz  
Sweep Time: 100ms  
Detector Type: Peak

Port 1

Ch Freq: 2.48GHz  
Span: 2.5MHz  
RBW: 20kHz  
VBW: 100kHz  
Sweep Time: 100ms  
Detector Type: Sample



Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	6.84	0.00483

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz_TnomVnom	Pass	0.94	6.84	30.00
2440MHz_TnomVnom	Pass	0.69	6.51	30.00
2480MHz_TnomVnom	Pass	0.10	6.13	30.00



Summary


Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-8.65

RBW=3kHz.

Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz_TnomVnom	Pass	0.94	-8.65	8.00
2440MHz_TnomVnom	Pass	0.69	-9.87	8.00
2480MHz_TnomVnom	Pass	0.10	-9.52	8.00

RBW=3kHz.

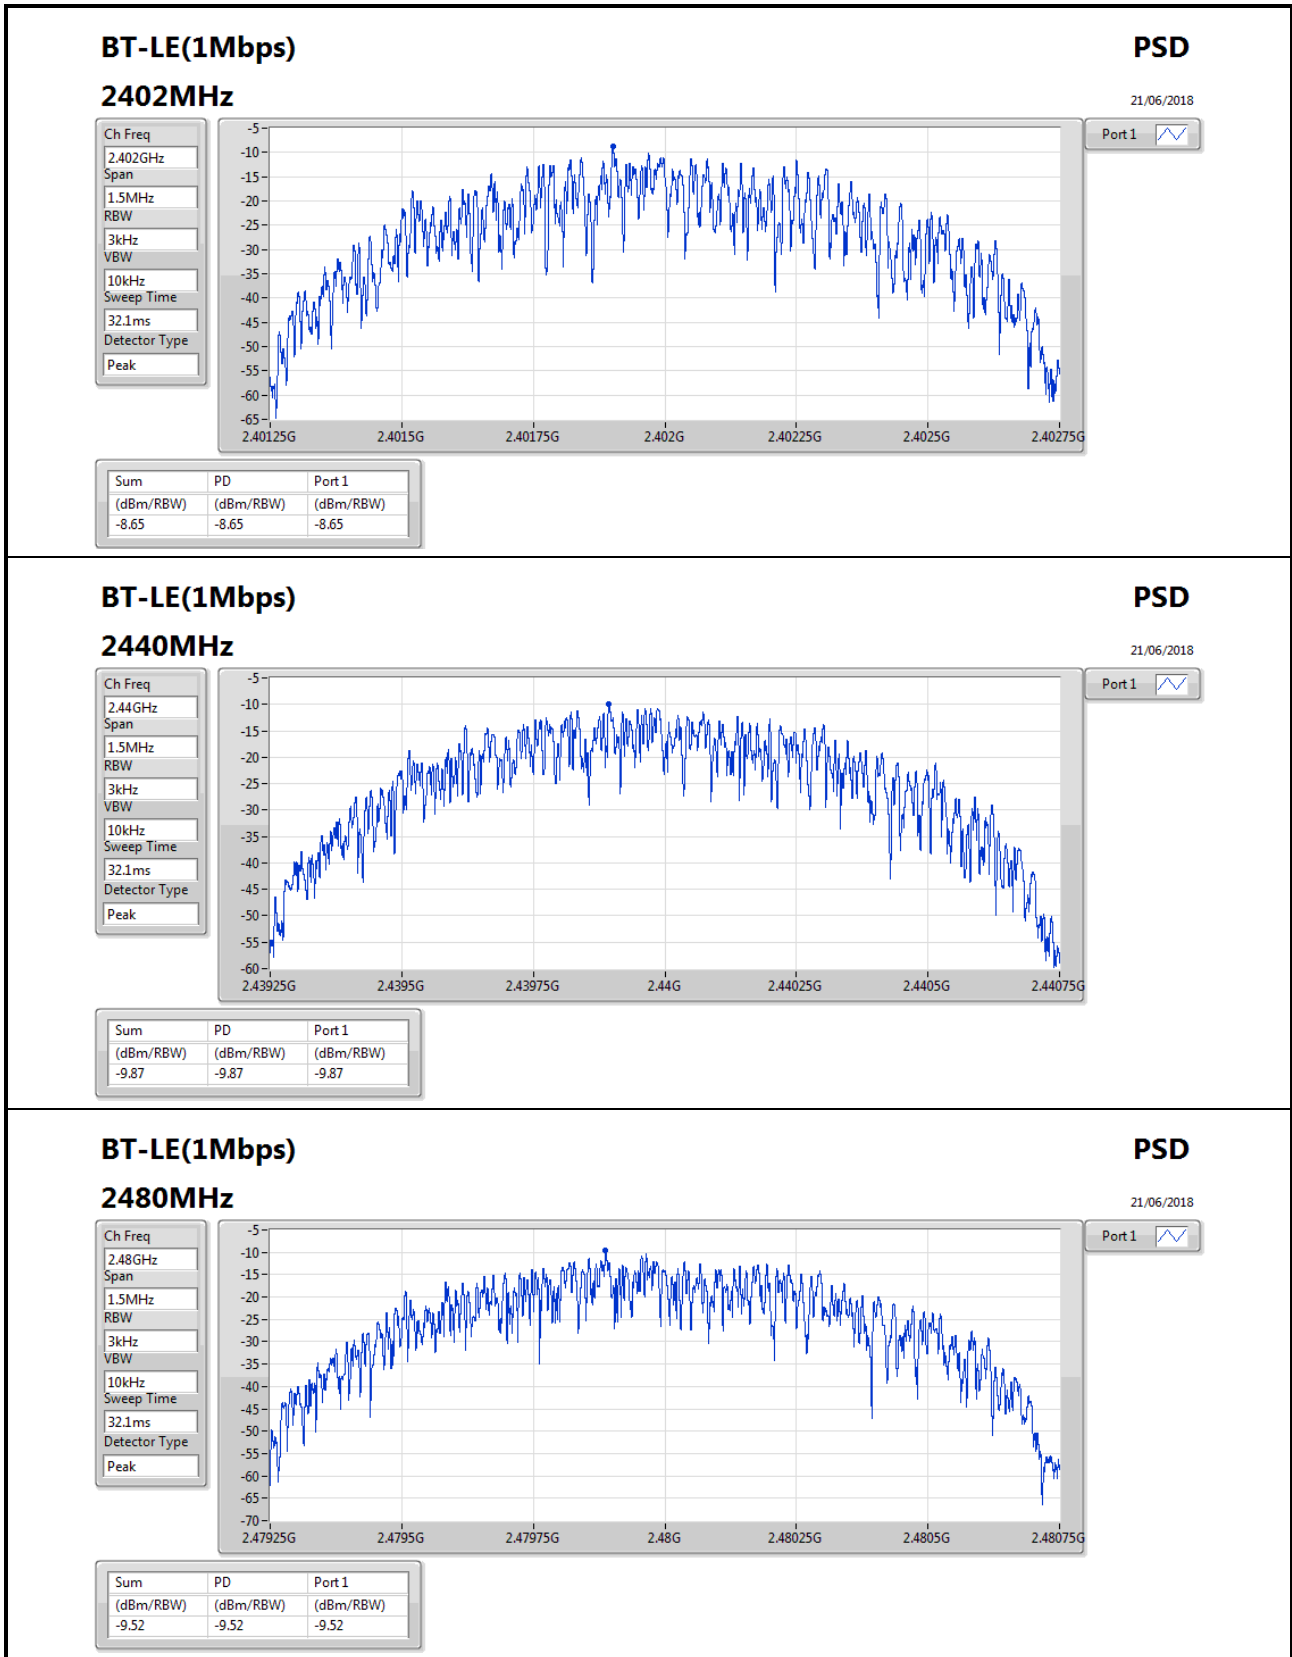




Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.402004G	6.65	-23.35	147.216M	-37.67	2.399996G	-62.23	2.483672G	-59.41	24.51031G	-53.35	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz_TnomVnom	Pass	2.402004G	6.65	-23.35	147.216M	-37.99	2.399992G	-52.57	2.483956G	-62.87	15.321579G	-51.56	1
2440MHz_TnomVnom	Pass	2.402004G	6.65	-23.35	147.216M	-37.76	2.398436G	-61.47	2.484244G	-61.91	15.082363G	-52.97	1
2480MHz_TnomVnom	Pass	2.402004G	6.65	-23.35	147.216M	-37.67	2.399996G	-62.23	2.483672G	-59.41	24.51031G	-53.35	1



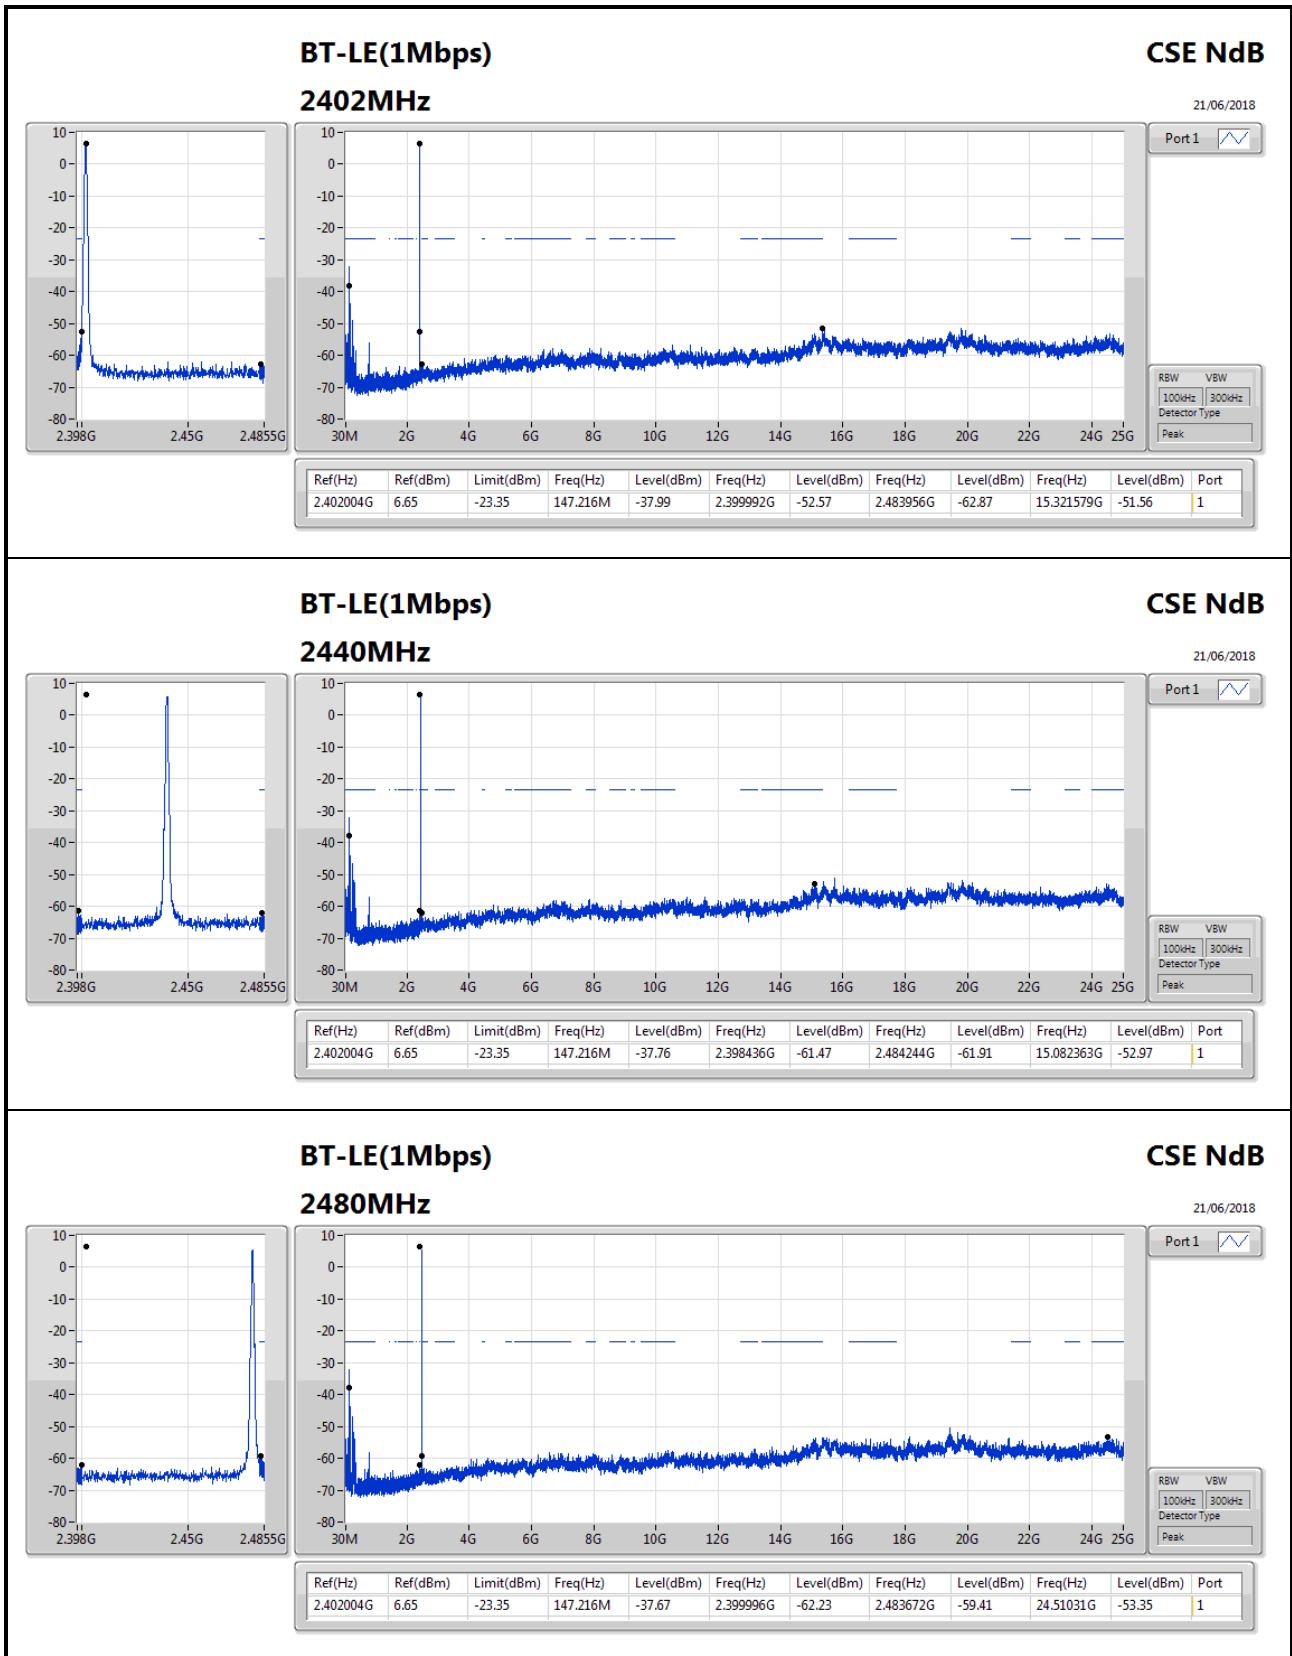



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	PK	749.74M	41.49	46.00	-4.51	0.95	3	Horizontal	360	1.00	-




Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-
2440MHz	Pass	PK	47.07k	55.37	114.13	-58.76	21.29	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	93.882k	46.50	108.13	-61.63	20.83	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	112.212k	45.36	106.59	-61.23	20.77	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	19.9107M	39.52	69.50	-29.98	23.21	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	9.5826M	38.85	69.50	-30.65	22.01	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	3.3141M	40.59	69.50	-28.91	20.83	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	70.74M	27.76	40.00	-12.24	-15.07	3	Vertical	360	1.00	-
2440MHz	Pass	PK	90.14M	31.36	43.50	-12.14	-12.35	3	Vertical	360	1.00	-
2440MHz	Pass	PK	270.56M	41.00	46.00	-5.00	-6.37	3	Vertical	360	1.00	-
2440MHz	Pass	PK	530.52M	34.07	46.00	-11.93	-2.02	3	Vertical	360	1.00	-
2440MHz	Pass	PK	650.8M	32.49	46.00	-13.51	-0.42	3	Vertical	360	1.00	-
2440MHz	Pass	PK	749.74M	34.53	46.00	-11.47	0.95	3	Vertical	360	1.00	-
2440MHz	Pass	PK	31.94M	24.52	40.00	-15.48	-5.36	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	115.36M	26.63	43.50	-16.87	-8.93	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	650.8M	36.01	46.00	-9.99	-0.42	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	749.74M	41.49	46.00	-4.51	0.95	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	850.62M	39.70	46.00	-6.30	1.99	3	Horizontal	360	1.00	-
2440MHz	Pass	QP	276.38M	36.66	46.00	-9.34	-6.32	3	Horizontal	146	1.00	-

**BT-LE(1Mbps)**  
**2440MHz\_Adapter**


15/08/2018

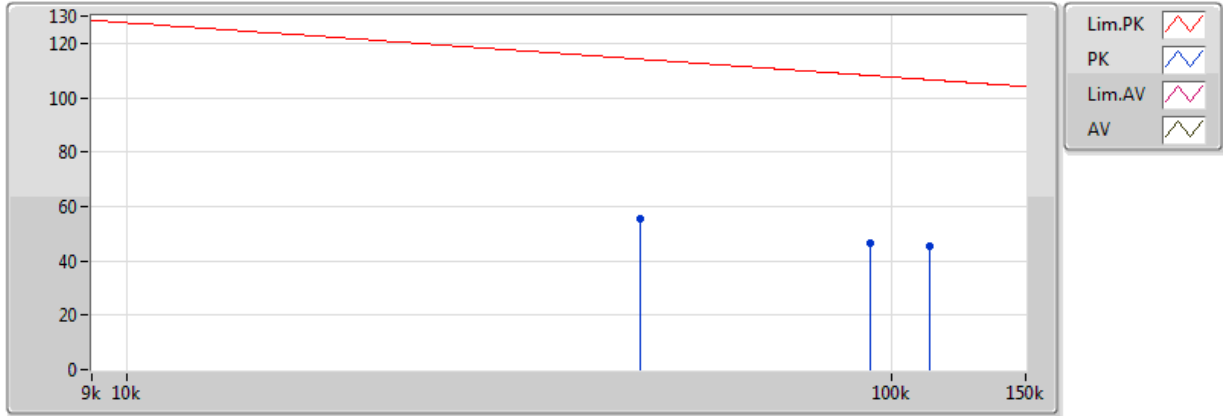

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	47.07k	55.37	114.13	-58.76	21.29	3	Horizontal	0	1.00	-
PK	93.882k	46.50	108.13	-61.63	20.83	3	Horizontal	0	1.00	-
PK	112.212k	45.36	106.59	-61.23	20.77	3	Horizontal	0	1.00	-

**BT-LE(1Mbps)**  
**2440MHz\_Adapter**


15/08/2018

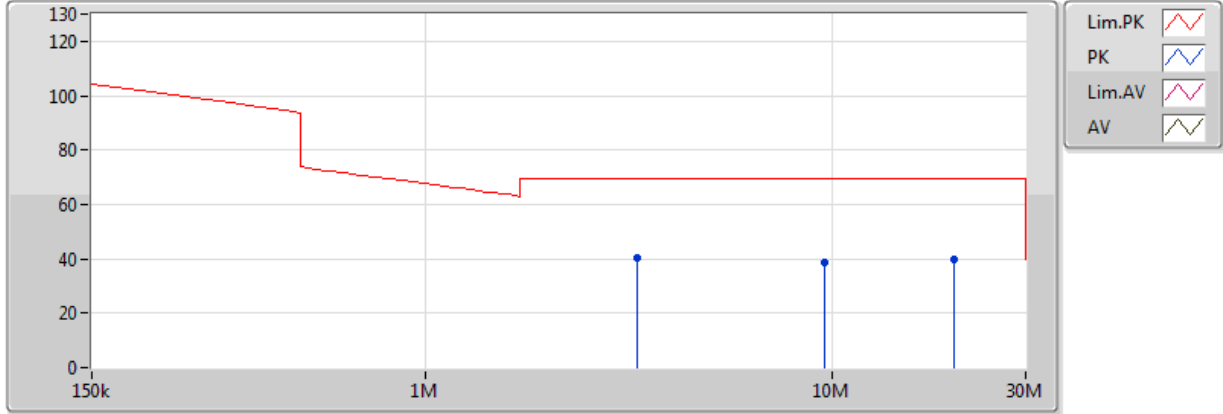

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	19.9107M	39.52	69.50	-29.98	23.21	3	Horizontal	360	1.00	-
PK	9.5826M	38.85	69.50	-30.65	22.01	3	Horizontal	360	1.00	-
PK	3.3141M	40.59	69.50	-28.91	20.83	3	Horizontal	360	1.00	-

**BT-LE(1Mbps)**  
**2440MHz\_Adapter**

15/08/2018

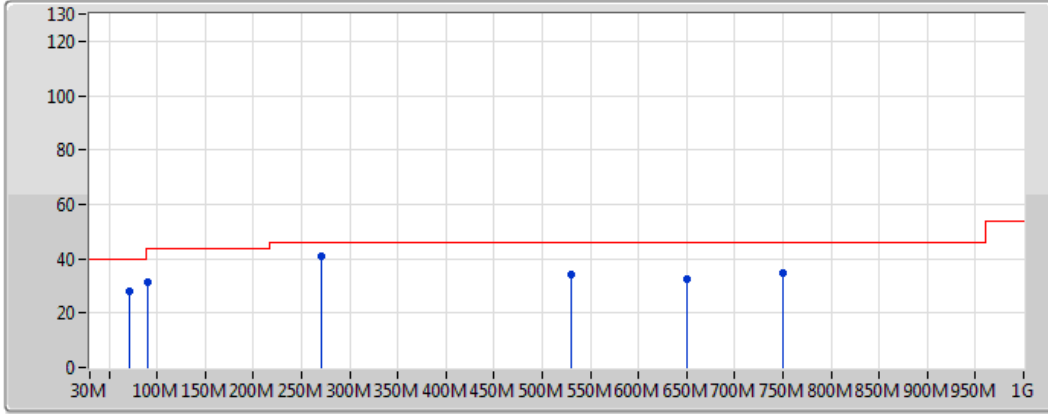


Legend for the spectrum plot:

- Lim.PK: Red line with a sawtooth pattern
- PK: Blue line with a sawtooth pattern
- Lim.AV: Pink line with a sawtooth pattern
- AV: Black line with a sawtooth pattern

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	70.74M	27.76	40.00	-12.24	-15.07	3	Vertical	360	1.00	-
PK	90.14M	31.36	43.50	-12.14	-12.35	3	Vertical	360	1.00	-
PK	270.56M	41.00	46.00	-5.00	-6.37	3	Vertical	360	1.00	-
PK	530.52M	34.07	46.00	-11.93	-2.02	3	Vertical	360	1.00	-
PK	650.8M	32.49	46.00	-13.51	-0.42	3	Vertical	360	1.00	-
PK	749.74M	34.53	46.00	-11.47	0.95	3	Vertical	360	1.00	-

### BT-LE(1Mbps) 2440MHz\_Adapter

15/08/2018

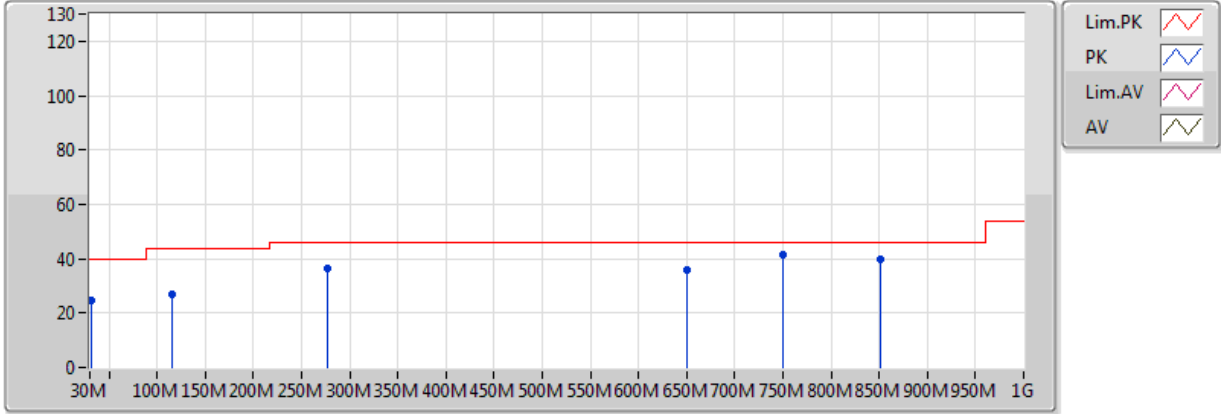

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	31.94M	24.52	40.00	-15.48	-5.36	3	Horizontal	360	1.00	-
PK	115.36M	26.63	43.50	-16.87	-8.93	3	Horizontal	360	1.00	-
PK	650.8M	36.01	46.00	-9.99	-0.42	3	Horizontal	360	1.00	-
PK	749.74M	41.49	46.00	-4.51	0.95	3	Horizontal	360	1.00	-
PK	850.62M	39.70	46.00	-6.30	1.99	3	Horizontal	360	1.00	-
QP	276.38M	36.66	46.00	-9.34	-6.32	3	Horizontal	146	1.00	-



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	PK	749.74M	41.49	46.00	-4.51	0.95	3	Horizontal	360	1.00	-







**Result**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-
2440MHz	Pass	PK	70.74M	27.76	40.00	-12.24	-15.07	3	Vertical	0	1.00	-
2440MHz	Pass	PK	90.14M	31.36	43.50	-12.14	-12.35	3	Vertical	0	1.00	-
2440MHz	Pass	PK	270.56M	41.00	46.00	-5.00	-6.37	3	Vertical	0	1.00	-
2440MHz	Pass	PK	530.52M	34.07	46.00	-11.93	-2.02	3	Vertical	0	1.00	-
2440MHz	Pass	PK	650.8M	32.49	46.00	-13.51	-0.42	3	Vertical	0	1.00	-
2440MHz	Pass	PK	749.74M	34.53	46.00	-11.47	0.95	3	Vertical	0	1.00	-
2440MHz	Pass	PK	31.94M	24.52	40.00	-15.48	-5.36	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	115.36M	26.63	43.50	-16.87	-8.93	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	650.8M	36.01	46.00	-9.99	-0.42	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	749.74M	41.49	46.00	-4.51	0.95	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	850.62M	39.70	46.00	-6.30	1.99	3	Horizontal	360	1.00	-
2440MHz	Pass	QP	276.38M	36.66	46.00	-9.34	-6.32	3	Horizontal	146	1.00	-

**BT-LE(1Mbps)**  
**2440MHz\_Adapter**


19/07/2018

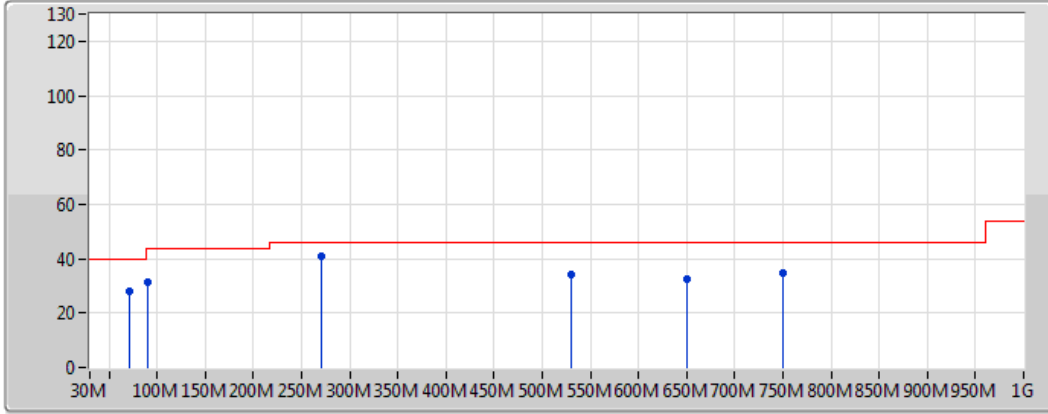

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	70.74M	27.76	40.00	-12.24	-15.07	3	Vertical	0	1.00	-
PK	90.14M	31.36	43.50	-12.14	-12.35	3	Vertical	0	1.00	-
PK	270.56M	41.00	46.00	-5.00	-6.37	3	Vertical	0	1.00	-
PK	530.52M	34.07	46.00	-11.93	-2.02	3	Vertical	0	1.00	-
PK	650.8M	32.49	46.00	-13.51	-0.42	3	Vertical	0	1.00	-
PK	749.74M	34.53	46.00	-11.47	0.95	3	Vertical	0	1.00	-

**BT-LE(1Mbps)**  
**2440MHz\_Adapter**

19/07/2018

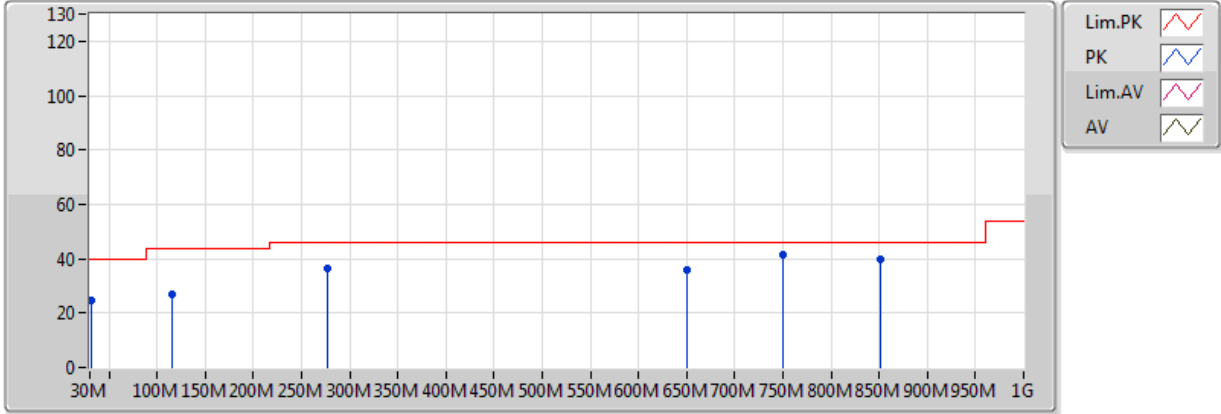

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	31.94M	24.52	40.00	-15.48	-5.36	3	Horizontal	360	1.00	-
PK	115.36M	26.63	43.50	-16.87	-8.93	3	Horizontal	360	1.00	-
PK	650.8M	36.01	46.00	-9.99	-0.42	3	Horizontal	360	1.00	-
PK	749.74M	41.49	46.00	-4.51	0.95	3	Horizontal	360	1.00	-
PK	850.62M	39.70	46.00	-6.30	1.99	3	Horizontal	360	1.00	-
QP	276.38M	36.66	46.00	-9.34	-6.32	3	Horizontal	146	1.00	-



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	AV	2.498G	50.13	54.00	-3.87	32.67	3	Vertical	257	3.19	-




Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	AV	2.3874G	49.31	54.00	-4.69	32.26	3	Vertical	252	1.04	-
2402MHz	Pass	AV	2.402G	97.07	Inf	-Inf	32.31	3	Vertical	252	1.04	-
2402MHz	Pass	PK	2.3836G	60.25	74.00	-13.75	32.25	3	Vertical	252	1.04	-
2402MHz	Pass	PK	2.4018G	97.59	Inf	-Inf	32.31	3	Vertical	252	1.04	-
2402MHz	Pass	AV	2.382G	49.27	54.00	-4.73	32.25	3	Horizontal	182	1.03	-
2402MHz	Pass	AV	2.402G	98.72	Inf	-Inf	32.31	3	Horizontal	182	1.03	-
2402MHz	Pass	PK	2.3774G	60.44	74.00	-13.56	32.23	3	Horizontal	182	1.03	-
2402MHz	Pass	PK	2.4018G	99.26	Inf	-Inf	32.31	3	Horizontal	182	1.03	-
2402MHz	Pass	AV	4.80396G	42.40	54.00	-11.60	2.99	3	Vertical	277	1.02	-
2402MHz	Pass	PK	4.80452G	51.25	74.00	-22.75	2.99	3	Vertical	277	1.02	-
2402MHz	Pass	AV	4.8039G	41.08	54.00	-12.92	2.99	3	Horizontal	178	1.01	-
2402MHz	Pass	PK	4.80436G	50.81	74.00	-23.19	2.99	3	Horizontal	178	1.01	-
2440MHz	Pass	AV	2.38998G	49.10	54.00	-4.90	32.28	3	Vertical	257	3.19	-
2440MHz	Pass	AV	2.44G	97.57	Inf	-Inf	32.46	3	Vertical	257	3.19	-
2440MHz	Pass	AV	2.498G	50.13	54.00	-3.87	32.67	3	Vertical	257	3.19	-
2440MHz	Pass	PK	2.3428G	59.45	74.00	-14.55	32.10	3	Vertical	257	3.19	-
2440MHz	Pass	PK	2.4404G	98.14	Inf	-Inf	32.46	3	Vertical	257	3.19	-
2440MHz	Pass	PK	2.4972G	60.36	74.00	-13.64	32.66	3	Vertical	257	3.19	-
2440MHz	Pass	AV	2.34G	49.34	54.00	-4.66	32.10	3	Horizontal	147	1.15	-
2440MHz	Pass	AV	2.44G	96.01	Inf	-Inf	32.46	3	Horizontal	147	1.15	-
2440MHz	Pass	AV	2.4984G	50.13	54.00	-3.87	32.67	3	Horizontal	147	1.15	-
2440MHz	Pass	PK	2.3432G	59.67	74.00	-14.33	32.10	3	Horizontal	147	1.15	-
2440MHz	Pass	PK	2.4404G	96.55	Inf	-Inf	32.46	3	Horizontal	147	1.15	-
2440MHz	Pass	PK	2.483502G	60.76	74.00	-13.24	32.61	3	Horizontal	147	1.15	-
2440MHz	Pass	AV	4.87994G	40.51	54.00	-13.49	3.16	3	Vertical	170	2.10	-
2440MHz	Pass	PK	4.87946G	50.20	74.00	-23.80	3.16	3	Vertical	170	2.10	-
2440MHz	Pass	AV	4.87972G	38.32	54.00	-15.68	3.16	3	Horizontal	180	1.01	-
2440MHz	Pass	PK	4.87952G	48.49	74.00	-25.51	3.16	3	Horizontal	180	1.01	-
2480MHz	Pass	AV	2.48G	95.75	Inf	-Inf	32.60	3	Vertical	261	2.82	-
2480MHz	Pass	AV	2.4988G	50.13	54.00	-3.87	32.67	3	Vertical	261	2.82	-
2480MHz	Pass	PK	2.4802G	96.32	Inf	-Inf	32.60	3	Vertical	261	2.82	-
2480MHz	Pass	PK	2.4964G	60.80	74.00	-13.20	32.66	3	Vertical	261	2.82	-
2480MHz	Pass	AV	2.48G	95.06	Inf	-Inf	32.60	3	Horizontal	191	2.11	-
2480MHz	Pass	AV	2.4988G	50.13	54.00	-3.87	32.67	3	Horizontal	191	2.11	-
2480MHz	Pass	PK	2.4798G	95.60	Inf	-Inf	32.60	3	Horizontal	191	2.11	-
2480MHz	Pass	PK	2.4904G	61.14	74.00	-12.86	32.64	3	Horizontal	191	2.11	-
2480MHz	Pass	AV	4.9598G	42.74	54.00	-11.26	3.33	3	Vertical	172	2.17	-
2480MHz	Pass	PK	4.95964G	51.84	74.00	-22.16	3.33	3	Vertical	172	2.17	-
2480MHz	Pass	AV	4.95995G	39.73	54.00	-14.27	3.33	3	Horizontal	186	1.06	-
2480MHz	Pass	PK	4.96044G	50.52	74.00	-23.48	3.33	3	Horizontal	186	1.06	-

### BT-LE(1Mbps)

### 2402MHz\_TX

18/06/2018

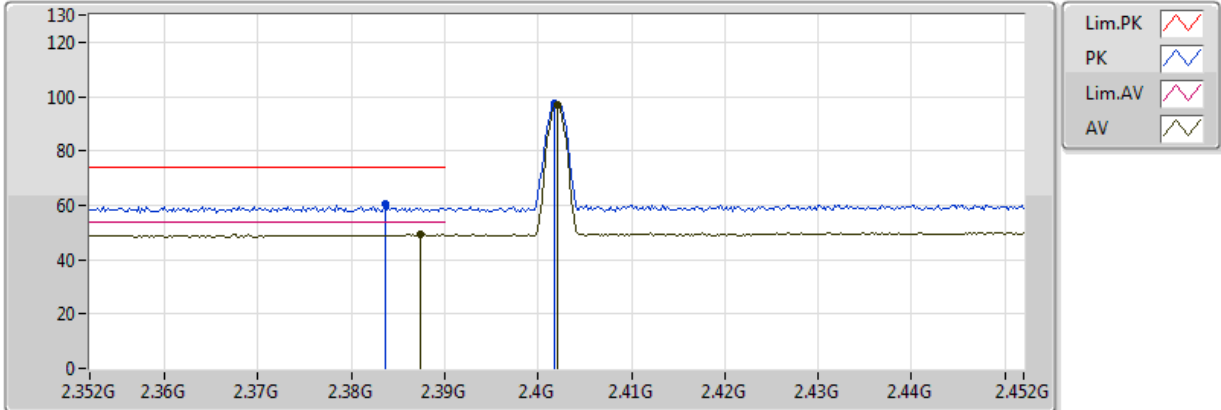


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	2.3874G	49.31	54.00	-4.69	32.26	3	Vertical	252	1.04	-
AV	2.402G	97.07	Inf	-Inf	32.31	3	Vertical	252	1.04	-
PK	2.3836G	60.25	74.00	-13.75	32.25	3	Vertical	252	1.04	-
PK	2.4018G	97.59	Inf	-Inf	32.31	3	Vertical	252	1.04	-

### BT-LE(1Mbps)

### 2402MHz\_TX

18/06/2018

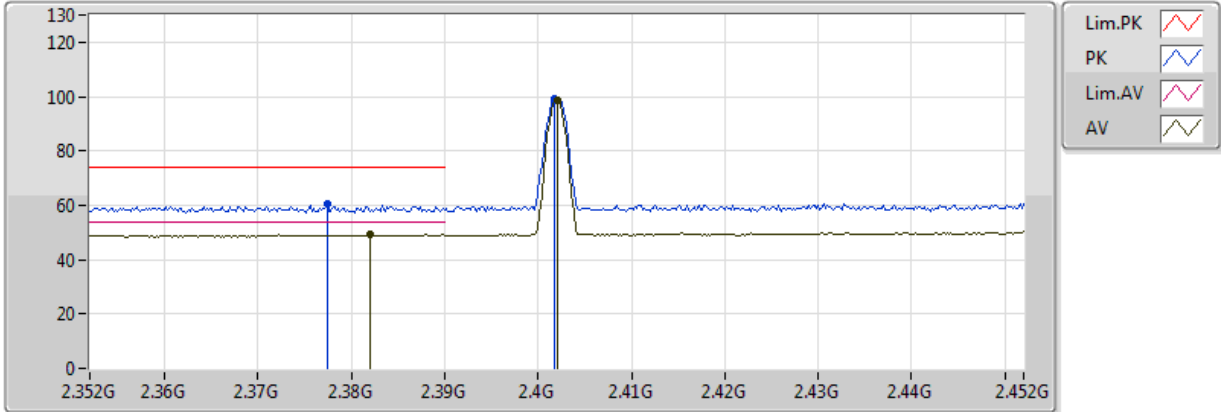






Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	2.382G	49.27	54.00	-4.73	32.25	3	Horizontal	182	1.03	-
AV	2.402G	98.72	Inf	-Inf	32.31	3	Horizontal	182	1.03	-
PK	2.3774G	60.44	74.00	-13.56	32.23	3	Horizontal	182	1.03	-
PK	2.4018G	99.26	Inf	-Inf	32.31	3	Horizontal	182	1.03	-

### BT-LE(1Mbps)
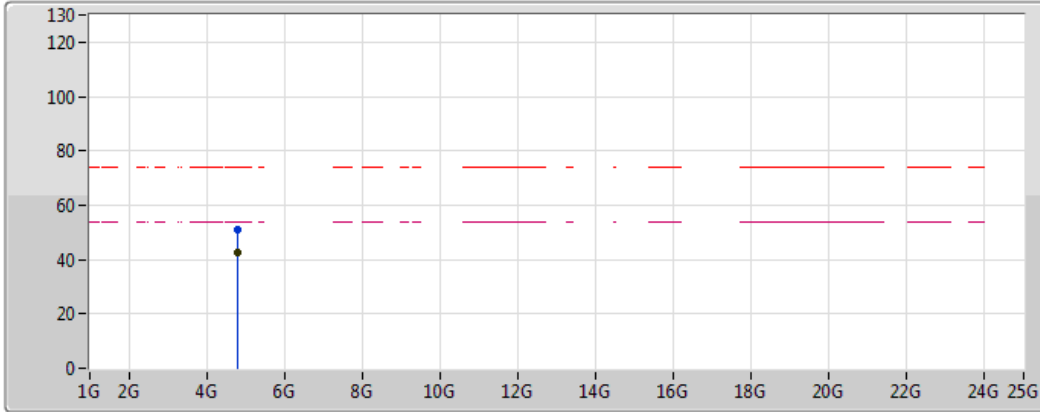
### 2402MHz\_TX

18/06/2018



Lim.PK	
PK	
Lim.AV	
AV	


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	4.80396G	42.40	54.00	-11.60	2.99	3	Vertical	277	1.02	-
PK	4.80452G	51.25	74.00	-22.75	2.99	3	Vertical	277	1.02	-







### BT-LE(1Mbps)
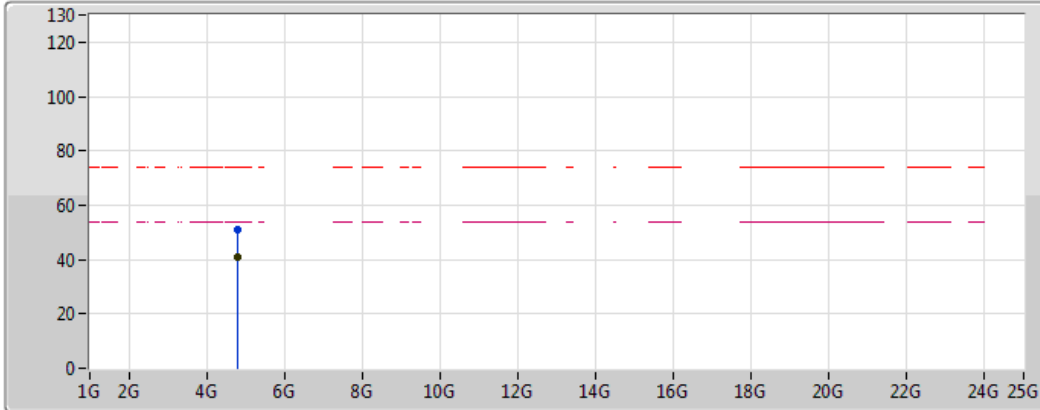
### 2402MHz\_TX

18/06/2018




Lim.PK	
PK	
Lim.AV	
AV	

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	4.8039G	41.08	54.00	-12.92	2.99	3	Horizontal	178	1.01	-
PK	4.80436G	50.81	74.00	-23.19	2.99	3	Horizontal	178	1.01	-

### BT-LE(1Mbps)

### 2440MHz\_TX

18/06/2018

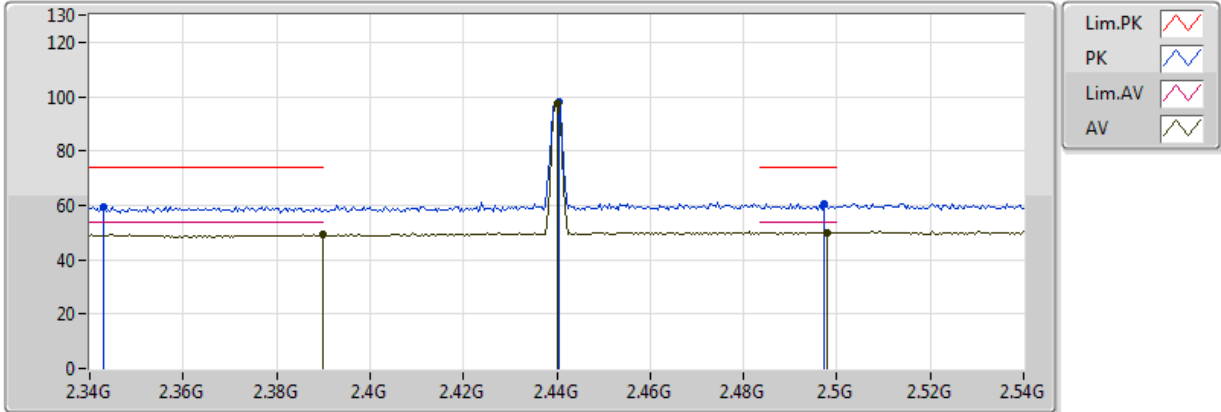


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	2.389998G	49.10	54.00	-4.90	32.28	3	Vertical	257	3.19	-
AV	2.44G	97.57	Inf	-Inf	32.46	3	Vertical	257	3.19	-
AV	2.498G	50.13	54.00	-3.87	32.67	3	Vertical	257	3.19	-
PK	2.3428G	59.45	74.00	-14.55	32.10	3	Vertical	257	3.19	-
PK	2.4404G	98.14	Inf	-Inf	32.46	3	Vertical	257	3.19	-
PK	2.4972G	60.36	74.00	-13.64	32.66	3	Vertical	257	3.19	-

### BT-LE(1Mbps)

### 2440MHz\_TX

18/06/2018

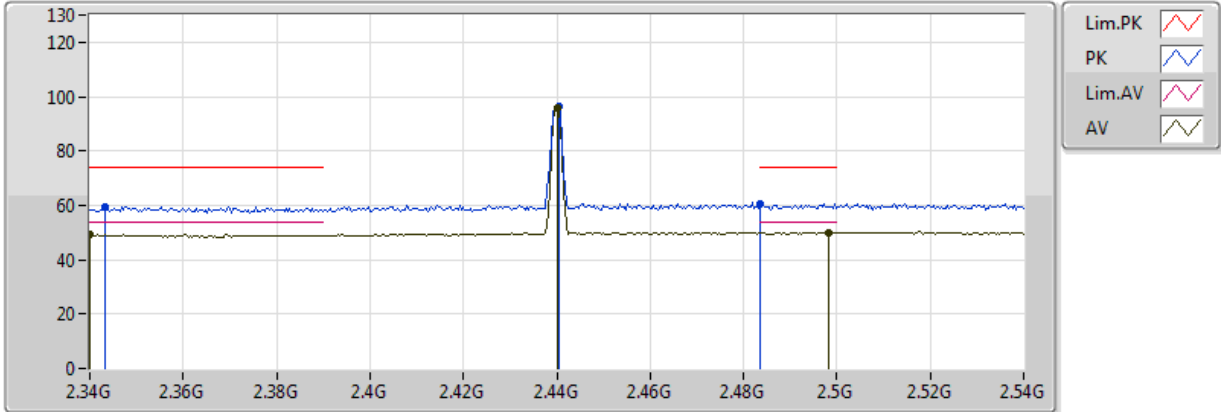






Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	2.34G	49.34	54.00	-4.66	32.10	3	Horizontal	147	1.15	-
AV	2.44G	96.01	Inf	-Inf	32.46	3	Horizontal	147	1.15	-
AV	2.4984G	50.13	54.00	-3.87	32.67	3	Horizontal	147	1.15	-
PK	2.3432G	59.67	74.00	-14.33	32.10	3	Horizontal	147	1.15	-
PK	2.4404G	96.55	Inf	-Inf	32.46	3	Horizontal	147	1.15	-
PK	2.483502G	60.76	74.00	-13.24	32.61	3	Horizontal	147	1.15	-

### BT-LE(1Mbps)
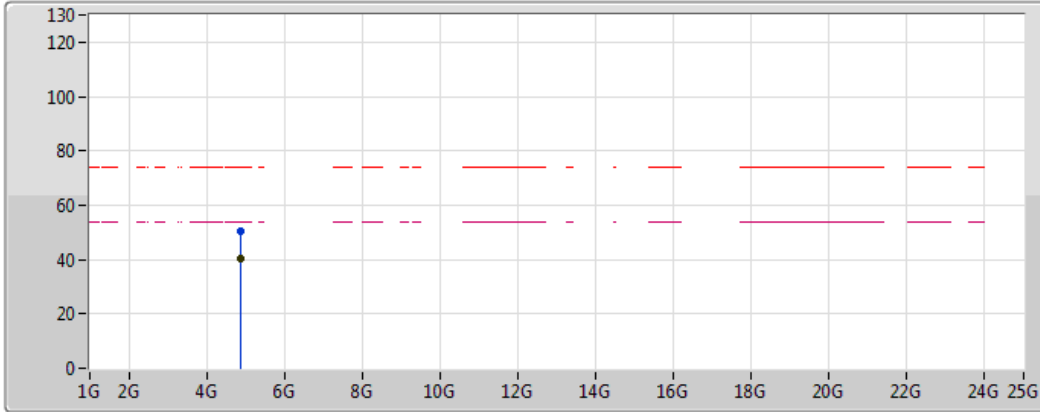
### 2440MHz\_TX

18/06/2018




Lim.PK	
PK	
Lim.AV	
AV	





Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	4.87994G	40.51	54.00	-13.49	3.16	3	Vertical	170	2.10	-
PK	4.87946G	50.20	74.00	-23.80	3.16	3	Vertical	170	2.10	-

### BT-LE(1Mbps)
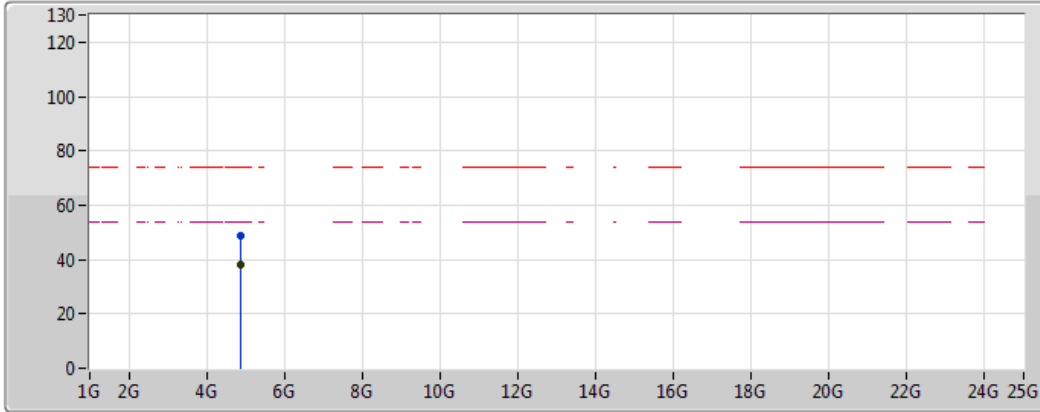
### 2440MHz\_TX

18/06/2018




Lim.PK	
PK	
Lim.AV	
AV	

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	4.87972G	38.32	54.00	-15.68	3.16	3	Horizontal	180	1.01	-
PK	4.87952G	48.49	74.00	-25.51	3.16	3	Horizontal	180	1.01	-

### BT-LE(1Mbps)

### 2480MHz\_TX

18/06/2018

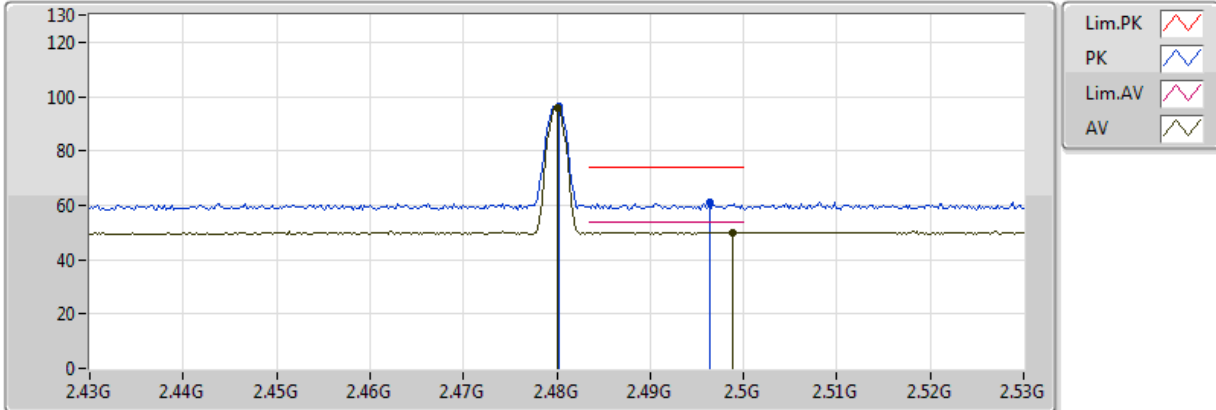


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	2.48G	95.75	Inf	-Inf	32.60	3	Vertical	261	2.82	-
AV	2.4988G	50.13	54.00	-3.87	32.67	3	Vertical	261	2.82	-
PK	2.4802G	96.32	Inf	-Inf	32.60	3	Vertical	261	2.82	-
PK	2.4964G	60.80	74.00	-13.20	32.66	3	Vertical	261	2.82	-

### BT-LE(1Mbps)

### 2480MHz\_TX

18/06/2018

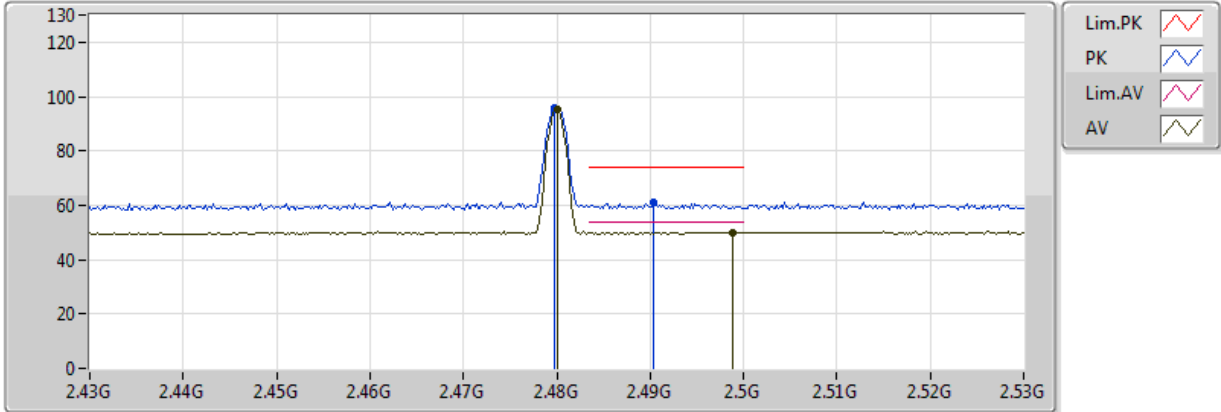






Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	2.48G	95.06	Inf	-Inf	32.60	3	Horizontal	191	2.11	-
AV	2.4988G	50.13	54.00	-3.87	32.67	3	Horizontal	191	2.11	-
PK	2.4798G	95.60	Inf	-Inf	32.60	3	Horizontal	191	2.11	-
PK	2.4904G	61.14	74.00	-12.86	32.64	3	Horizontal	191	2.11	-

### BT-LE(1Mbps)
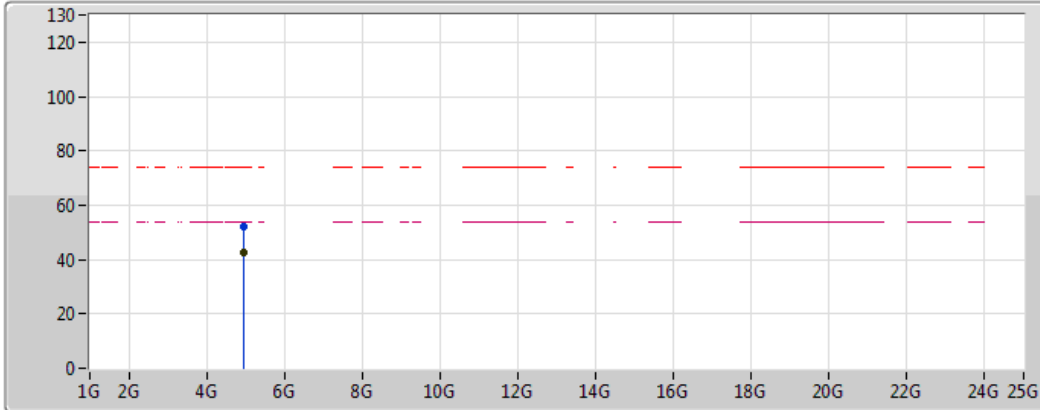
### 2480MHz\_TX

18/06/2018



Lim.PK	
PK	
Lim.AV	
AV	


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	4.9598G	42.74	54.00	-11.26	3.33	3	Vertical	172	2.17	-
PK	4.95964G	51.84	74.00	-22.16	3.33	3	Vertical	172	2.17	-







### BT-LE(1Mbps)
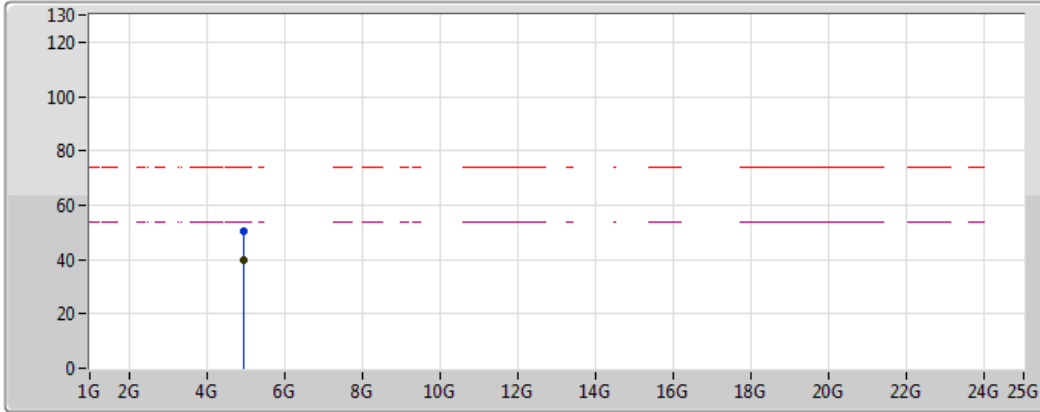
### 2480MHz\_TX

18/06/2018



Lim.PK	
PK	
Lim.AV	
AV	

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	4.95995G	39.73	54.00	-14.27	3.33	3	Horizontal	186	1.06	-
PK	4.96044G	50.52	74.00	-23.48	3.33	3	Horizontal	186	1.06	-