



# FCC RADIO TEST REPORT

**FCC ID** : 2AEUPBHASC081  
**Equipment** : Stick Up Cam Pro  
**Brand Name** : ring  
**Model Name** : 5E72E9  
**Applicant** : Ring LLC  
12515 Cerise Ave, Hawthorne, CA 90250, USA  
**Manufacturer** : Ring LLC  
12515 Cerise Ave, Hawthorne, CA 90250, USA  
**Standard** : FCC Part 15 Subpart C §15.247

The product was received on Apr. 28, 2022 and testing was performed from Jun. 16, 2022 to Sep. 07, 2022. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	5
1.3 Testing Location .....	5
1.4 Applicable Standards.....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Carrier Frequency and Channel .....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system .....	10
2.5 EUT Operation Test Setup .....	10
2.6 Measurement Results Explanation Example.....	10
<b>3 Test Result .....</b>	<b>11</b>
3.1 6dB and 99% Bandwidth Measurement .....	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement .....	13
3.4 Conducted Band Edges and Spurious Emission Measurement .....	14
3.5 Radiated Band Edges and Spurious Emission Measurement .....	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements .....	21
<b>4 List of Measuring Equipment.....</b>	<b>22</b>
<b>5 Uncertainty of Evaluation .....</b>	<b>24</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission</b>	
<b>Appendix D. Radiated Spurious Emission Plots</b>	
<b>Appendix E. Duty Cycle Plots</b>	
<b>Appendix F. Setup Photographs</b>	





### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3)	Power Output Measurement	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges	Pass	-
		Conducted Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	6.06 dB under the limit at 30.000 MHz
3.6	15.207	AC Conducted Emission	Pass	16.97 dB under the limit at 0.538 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

**Declaration of Conformity:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

**Comments and Explanations:**

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Keven Cheng**

**Report Producer: Ruby Zou**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Bluetooth-LE, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n, LoRa, and 24G Radar.

Product Feature	
Antenna Type	WLAN: PIFA Antenna Bluetooth-LE: PIFA Antenna LoRa: PIFA Antenna 24GHz Radar: Patch Antenna
SW Version	1.12.21
HW Version	B6

Antenna information		
902 MHz ~ 928 MHz	Peak Gain (dBi)	-0.3

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

## 1.2 Modification of EUT

No modifications made to the EUT during the testing.

## 1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	<b>Sporton Site No.</b> TH05-HY, CO07-HY, 03CH11-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786



## **1.4 Applicable Standards**

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
902 – 928 MHz	1	902.5	17	915.3
	2	903.3	18	916.1
	3	904.1	19	916.9
	4	904.9	20	917.7
	5	905.7	21	918.5
	6	906.5	22	919.3
	7	907.3	23	920.1
	8	908.1	24	920.9
	9	908.9	25	921.7
	10	909.7	26	922.5
	11	910.5	27	923.3
	12	911.3	28	924.1
	13	912.1	29	924.9
	14	912.9	30	925.7
	15	913.7	31	926.5
		16	914.5	




## 2.2 Test Mode

Summary table of Test Cases		
Test Item	Feature	LoRa
<b>Conducted &amp; Radiated Test Cases</b>	<b>LoRa 500 KHz DTS_SF7</b>	Mode 1: CH01 Tx_902.50 MHz Mode 2: CH16 Tx_914.50 MHz Mode 3: CH31 Tx_926.50 MHz
	<b>LoRa 500 KHz DTS_SF8</b>	Mode 4: CH01 Tx_902.50 MHz Mode 5: CH16 Tx_914.50 MHz Mode 6: CH31 Tx_926.50 MHz
	<b>LoRa 500 KHz DTS_SF9</b>	Mode 7: CH01 Tx_902.50 MHz Mode 8: CH16 Tx_914.50 MHz Mode 9: CH31 Tx_926.50 MHz
	<b>LoRa 500 KHz DTS_SF10</b>	Mode 10: CH01 Tx_902.50 MHz Mode 11: CH16 Tx_914.50 MHz Mode 12: CH31 Tx_926.50 MHz
	<b>LoRa 500 KHz DTS_SF11</b>	Mode 13: CH01 Tx_902.50 MHz Mode 14: CH16 Tx_914.50 MHz Mode 15: CH31 Tx_926.50 MHz
<b>AC Conducted Emission</b>	Mode 1: IR LED On + PIR Sensor On + LoRa Tx + WLAN (2.4GHz) Link + Camera On + Mounting Plate (Base) + Charging Battery 1 + Adapter + Bluetooth-LE Link + Speaker + 24G Radar On	
<b>Remark:</b> For Radiated Test Cases, the tests were performed with Battery 1.		



## 2.3 Connection Diagram of Test System

### <AC Conducted Emission Mode>

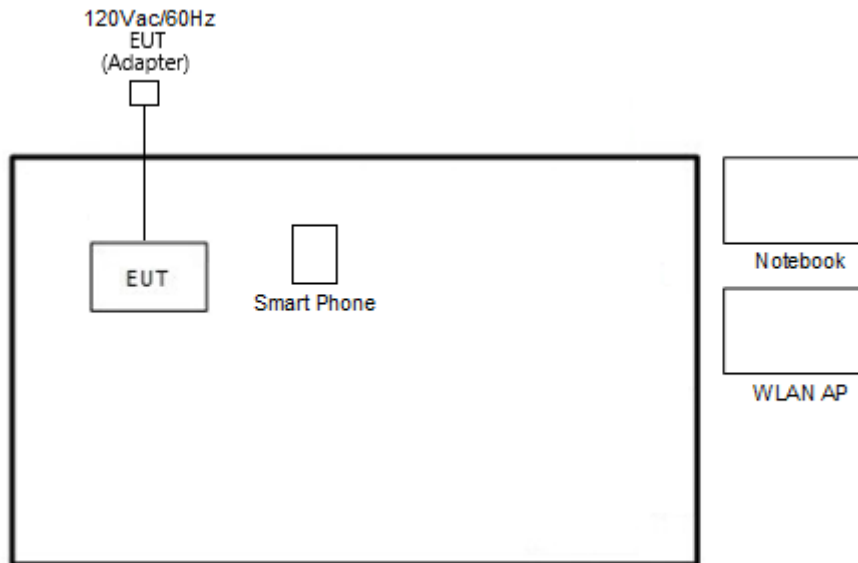

### <LoRa Tx Mode>





## 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC52	N/A	N/A	Unshielded, 1.8m
2.	Notebook	Dell	P79G	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Smartphone	HTC	M9pw	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

The RF test items, utility “Tera Term 4.104[SVN# 8043]” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset}(dB) &= \text{RF cable loss}(dB) + \text{attenuator factor}(dB). \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup



##### 3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

Section 15.247(b)(3) For systems using digital modulation in the 902-928 MHz, the limit for peak output power is 1 watt.


### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

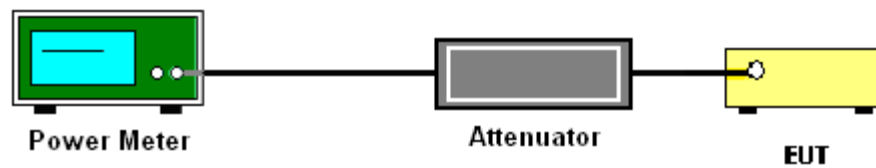

### 3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.3 Method AVGPSD-1.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = RMS, Sweep time = auto couple, Trace mode = Average, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 30dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup



#### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

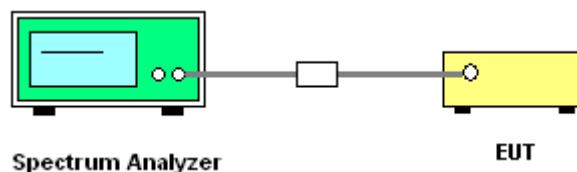

### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




### 3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW = 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3 MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




### 3.5.4 Test Setup


For radiated emissions below 30MHz

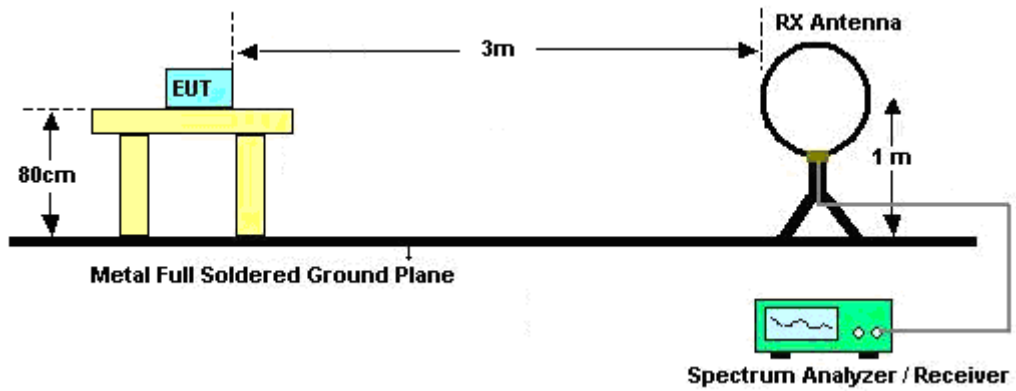

For radiated emissions from 30MHz to 1GHz

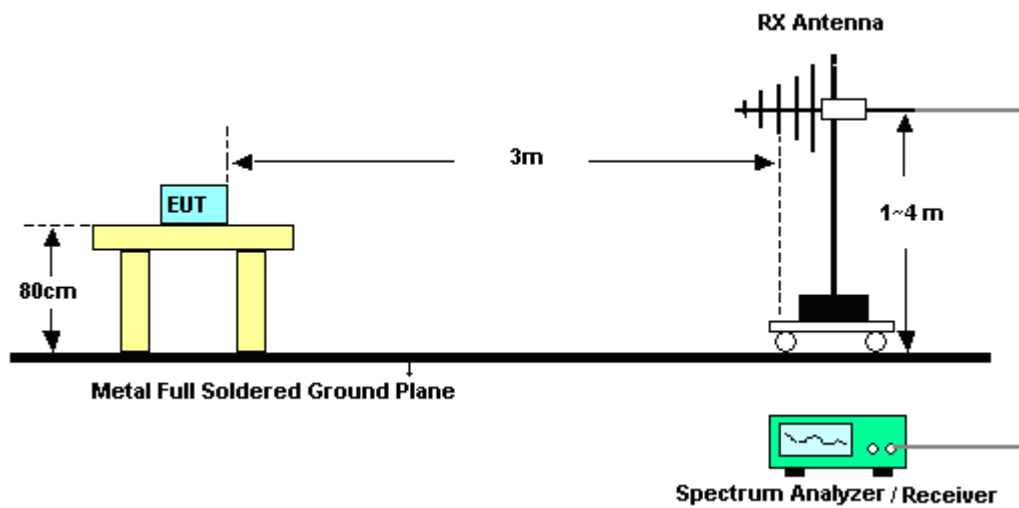

For radiated emissions test above 1GHz

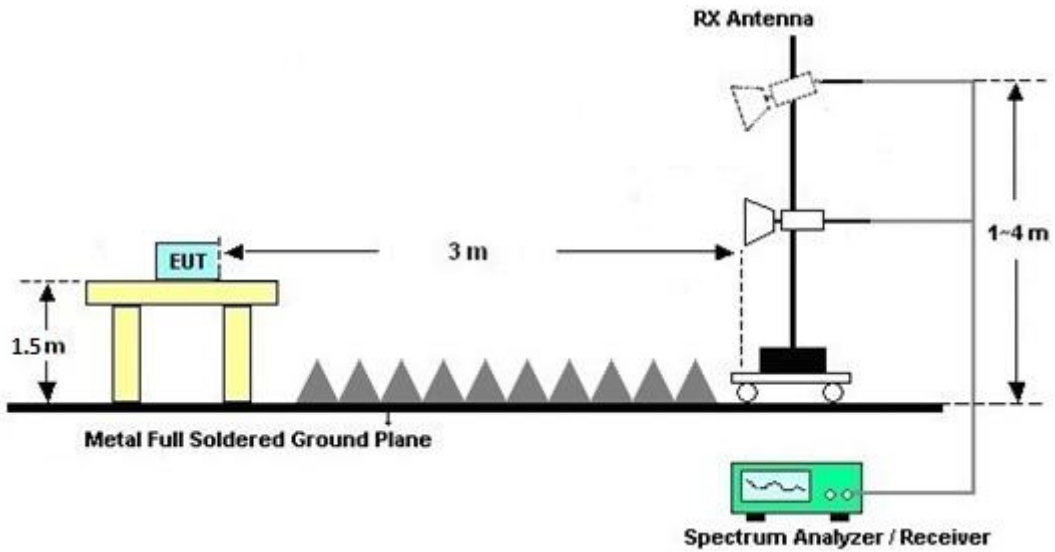

### 3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

### 3.5.7 Duty Cycle

Please refer to Appendix E.

### 3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix C and D.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

### 3.6.4 Test Setup

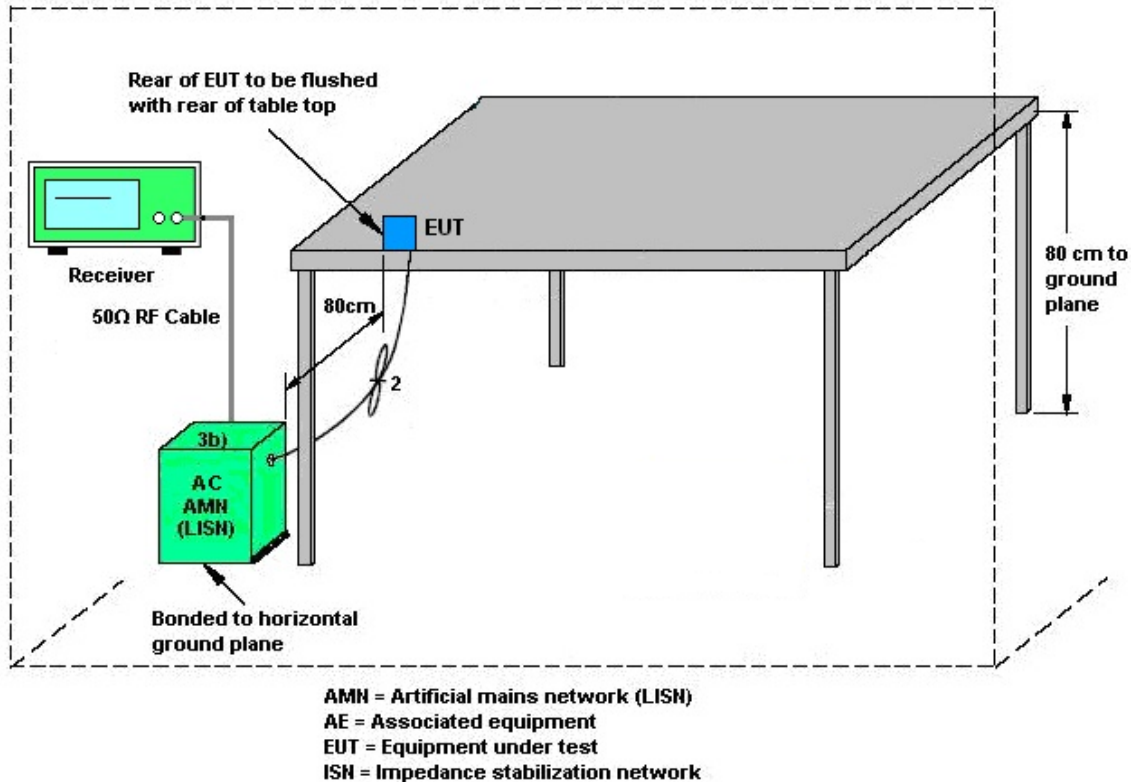

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting Antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz~30 MHz	Mar. 18, 2022	Aug. 17, 2022~ Sep. 07, 2022	Mar. 17, 2023	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 09, 2021	Aug. 17, 2022~ Sep. 07, 2022	Oct. 08, 2022	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1212	1GHz ~ 18GHz	Mar. 10, 2022	Aug. 17, 2022~ Sep. 07, 2022	Mar. 09, 2023	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 10, 2021	Aug. 17, 2022~ Sep. 07, 2022	Dec. 09, 2022	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 10, 2021	Aug. 17, 2022~ Sep. 07, 2022	Nov. 09, 2022	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55- 303	171000180005 5007	1GHz~18GHz	Jun. 15, 2022	Aug. 17, 2022~ Sep. 07, 2022	Jun. 14, 2023	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 15, 2021	Aug. 17, 2022~ Sep. 07, 2022	Oct. 14, 2022	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MX E)	MY54130085	20MHz~8.4GHz	Oct. 21, 2021	Aug. 17, 2022~ Sep. 07, 2022	Oct. 20, 2022	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Aug. 17, 2022~ Sep. 07, 2022	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500 -B	N/A	1~4m	N/A	Aug. 17, 2022~ Sep. 07, 2022	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Aug. 17, 2022~ Sep. 07, 2022	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Aug. 17, 2022~ Sep. 07, 2022	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 10, 2022	Aug. 17, 2022~ Sep. 07, 2022	Mar. 09, 2023	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz-30MHz	Mar. 10, 2022	Aug. 17, 2022~ Sep. 07, 2022	Mar. 09, 2023	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	30MHz-18GHz	Mar. 10, 2022	Aug. 17, 2022~ Sep. 07, 2022	Mar. 09, 2023	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	811852/4	30MHz-18GHz	Mar. 10, 2022	Aug. 17, 2022~ Sep. 07, 2022	Mar. 09, 2023	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000- 1530-8000-4 0SS	SN11	1.53G Low Pass	Sep. 13, 2021	Aug. 17, 2022~ Sep. 07, 2022	Sep. 12, 2022	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-90 0-1000-1500 0-60SS	SN12	1GHz High Pass	Nov. 04, 2021	Aug. 17, 2022~ Sep. 07, 2022	Nov. 03, 2022	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-27 00-3000-180 00-60SS	SN3	3GHz High Pass Filter	Sep. 13, 2021	Aug. 17, 2022~ Sep. 07, 2022	Sep. 12, 2022	Radiation (03CH11-HY)
Hygrometer	TECEPEL	DTM-303B	TP140325	N/A	Nov. 26, 2021	Aug. 17, 2022~ Sep. 07, 2022	Nov. 25, 2022	Radiation (03CH11-HY)
Hygrometer	TECEPEL	DTM-303B	TP200880	N/A	Sep. 30, 2021	Aug. 17, 2022~ Sep. 07, 2022	Sep. 29, 2022	Radiation (03CH11-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Jul. 06, 2022	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jul. 06, 2022	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 29, 2021	Jul. 06, 2022	Oct. 28, 2022	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 16, 2022	Jul. 06, 2022	Mar. 15, 2023	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Feb. 16, 2022	Jul. 06, 2022	Feb. 15, 2023	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI7	100724	9kHz~7GHz	Feb. 24, 2022	Jul. 06, 2022	Feb. 23, 2023	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 16, 2021	Jun. 16, 2022~ Jul. 21, 2022	Nov. 15, 2022	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054SNO12 (NO:113)	10MHz~6GHz	Dec. 16, 2021	Jun. 16, 2022~ Jul. 21, 2022	Dec. 15, 2022	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 30, 2021	Jun. 16, 2022~ Jul. 21, 2022	Aug. 29, 2022	Conducted (TH05-HY)
Switch Control Mainframe	E-IUSTRUMENT	ETF-1405-0	EC1900067 (BOX7)	N/A	Aug. 12, 2021	Jun. 16, 2022~ Jul. 21, 2022	Aug. 11, 2022	Conducted (TH05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.8 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.4 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.9 dB
---	--------



**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Shiming Liu	Temperature:	23~25	°C
Test Date:	2022/6/16~2022/7/21	Relative Humidity:	54~58	%

&lt;LoRa 500kHz&gt;

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
LoRa	SF7	1	1	902.5	0.505	0.607	0.50	Pass
LoRa	SF7	1	16	914.5	0.533	0.629	0.50	Pass
LoRa	SF7	1	31	926.5	0.531	0.629	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
LoRa	SF7	1	1	902.5	22.40	30.00	-0.30	22.10	36.00	Pass
LoRa	SF7	1	16	914.5	22.00	30.00	-0.30	21.70	36.00	Pass
LoRa	SF7	1	31	926.5	21.70	30.00	-0.30	21.40	36.00	Pass

**TEST RESULTS DATA**  
**Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Average PSD (dBm /3kHz)	DG (dBi)	Average PSD Limit (dBm /3kHz)	Pass/Fail
LoRa	SF7	1	1	902.5	22.57	5.57	-0.30	8.00	Pass
LoRa	SF7	1	16	914.5	22.16	3.11	-0.30	8.00	Pass
LoRa	SF7	1	31	926.5	21.87	2.52	-0.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
LoRa	SF8	1	1	902.5	0.521	0.623	0.50	Pass
LoRa	SF8	1	16	914.5	0.539	0.637	0.50	Pass
LoRa	SF8	1	31	926.5	0.535	0.637	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
LoRa	SF8	1	1	902.5	22.40	30.00	-0.30	22.10	36.00	Pass
LoRa	SF8	1	16	914.5	22.00	30.00	-0.30	21.70	36.00	Pass
LoRa	SF8	1	31	926.5	21.70	30.00	-0.30	21.40	36.00	Pass

**TEST RESULTS DATA**  
**Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Average PSD (dBm /3kHz)	DG (dBi)	Average PSD Limit (dBm /3kHz)	Pass/Fail
LoRa	SF8	1	1	902.5	22.55	4.42	-0.30	8.00	Pass
LoRa	SF8	1	16	914.5	22.32	3.36	-0.30	8.00	Pass
LoRa	SF8	1	31	926.5	22.05	2.20	-0.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
LoRa	SF9	1	1	902.5	0.529	0.635	0.50	Pass
LoRa	SF9	1	16	914.5	0.541	0.641	0.50	Pass
LoRa	SF9	1	31	926.5	0.539	0.641	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
LoRa	SF9	1	1	902.5	22.40	30.00	-0.30	22.10	36.00	Pass
LoRa	SF9	1	16	914.5	22.00	30.00	-0.30	21.70	36.00	Pass
LoRa	SF9	1	31	926.5	21.70	30.00	-0.30	21.40	36.00	Pass

**TEST RESULTS DATA**  
**Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Average PSD (dBm /3kHz)	DG (dBi)	Average PSD Limit (dBm /3kHz)	Pass/Fail
LoRa	SF9	1	1	902.5	22.72	4.72	-0.30	8.00	Pass
LoRa	SF9	1	16	914.5	22.34	2.93	-0.30	8.00	Pass
LoRa	SF9	1	31	926.5	22.07	2.49	-0.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
LoRa	SF10	1	1	902.5	0.525	0.639	0.50	Pass
LoRa	SF10	1	16	914.5	0.539	0.645	0.50	Pass
LoRa	SF10	1	31	926.5	0.541	0.645	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
LoRa	SF10	1	1	902.5	22.40	30.00	-0.30	22.10	36.00	Pass
LoRa	SF10	1	16	914.5	22.00	30.00	-0.30	21.70	36.00	Pass
LoRa	SF10	1	31	926.5	21.70	30.00	-0.30	21.40	36.00	Pass

**TEST RESULTS DATA**  
**Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Average PSD (dBm /3kHz)	DG (dBi)	Average PSD Limit (dBm /3kHz)	Pass/Fail
LoRa	SF10	1	1	902.5	22.73	3.66	-0.30	8.00	Pass
LoRa	SF10	1	16	914.5	22.33	3.44	-0.30	8.00	Pass
LoRa	SF10	1	31	926.5	22.05	3.74	-0.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
LoRa	SF11	1	1	902.5	0.539	0.643	0.50	Pass
LoRa	SF11	1	16	914.5	0.543	0.645	0.50	Pass
LoRa	SF11	1	31	926.5	0.541	0.647	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
LoRa	SF11	1	1	902.5	22.40	30.00	-0.30	22.10	36.00	Pass
LoRa	SF11	1	16	914.5	22.00	30.00	-0.30	21.70	36.00	Pass
LoRa	SF11	1	31	926.5	21.70	30.00	-0.30	21.40	36.00	Pass

**TEST RESULTS DATA**  
**Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Average PSD (dBm /3kHz)	DG (dBi)	Average PSD Limit (dBm /3kHz)	Pass/Fail
LoRa	SF11	1	1	902.5	22.72	5.43	-0.30	8.00	Pass
LoRa	SF11	1	16	914.5	22.32	3.87	-0.30	8.00	Pass
LoRa	SF11	1	31	926.5	22.05	4.37	-0.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




<LoRa 500kHz DTS>

<Data Rate: SF7>


**6dB Bandwidth**

**LoRa 500KHz SF7**


**6 dB Bandwidth Plot on Channel 1**

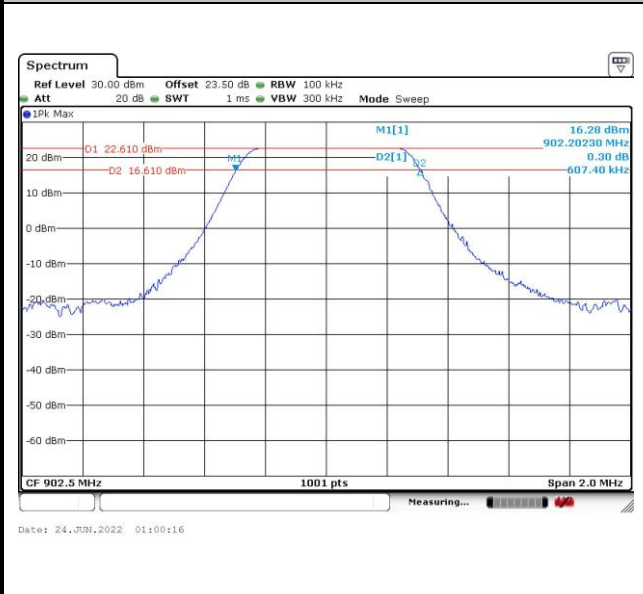

**6 dB Bandwidth Plot on Channel 16**

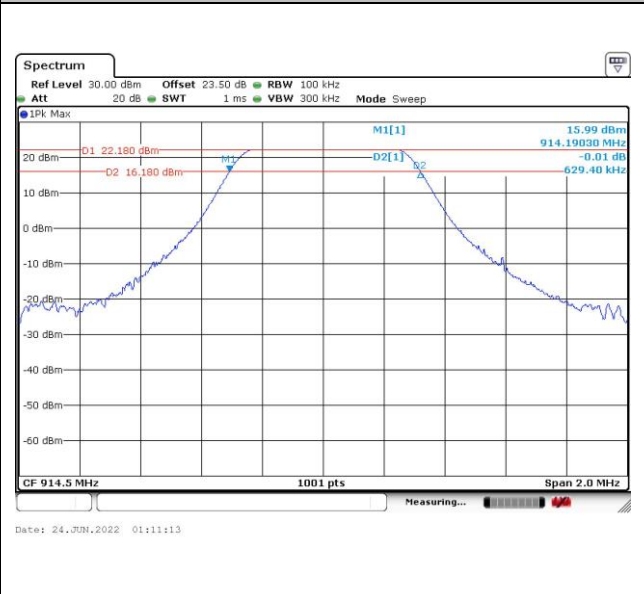

**6 dB Bandwidth Plot on Channel 31**

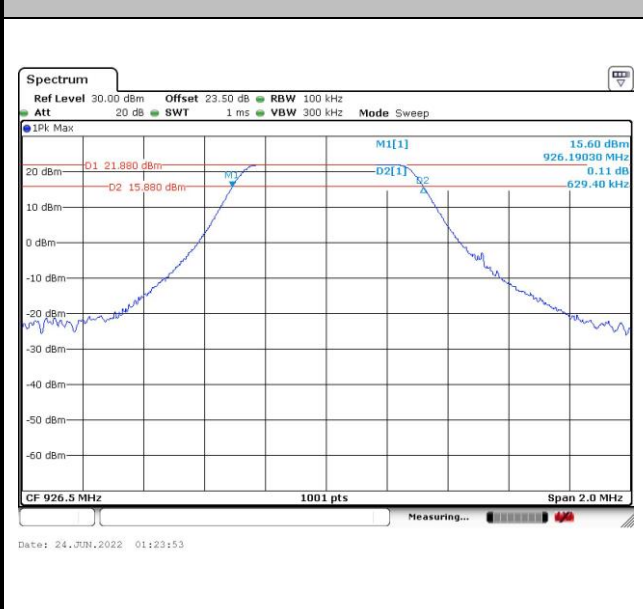




# 99% Occupied Bandwidth

## LoRa 500KHz SF7


### 99% Occupied Bandwidth Plot on Channel 1

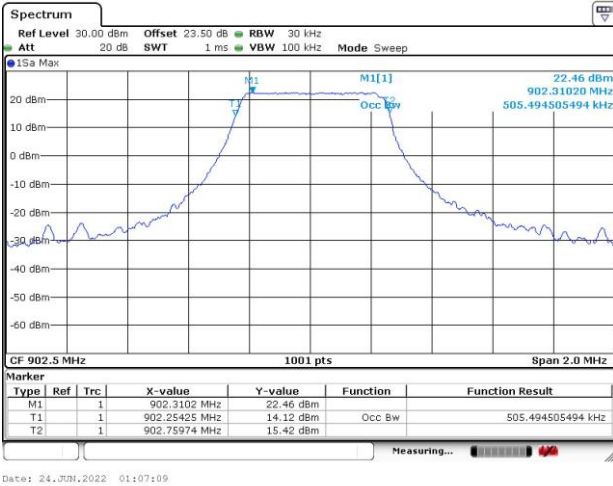

### 99% Occupied Plot Bandwidth on Channel 16



### 99% Occupied Bandwidth Plot on Channel 31

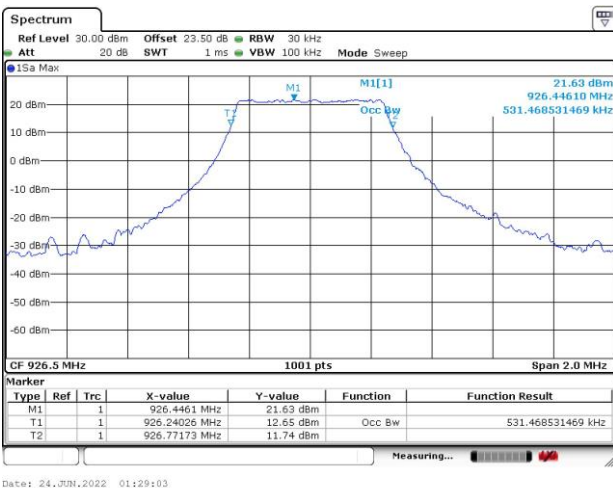


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



# Power Spectral Density (dBm/3kHz)


## LoRa 500KHz SF7

Power Density (dBm/3kHz) Plot Channel 1

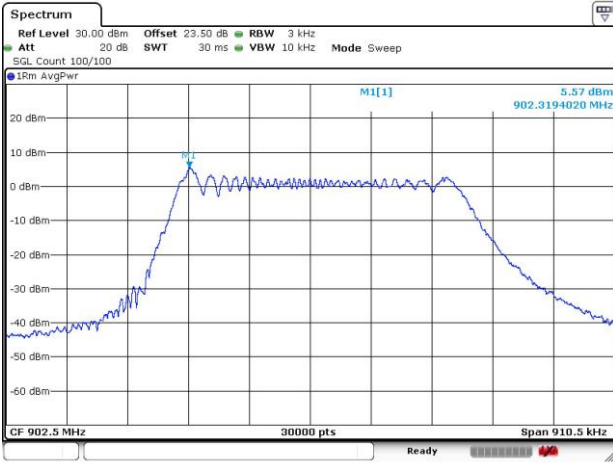


Date: 24 JUN 2022 01:02:30

Power Density (dBm/3kHz) Plot Channel 16

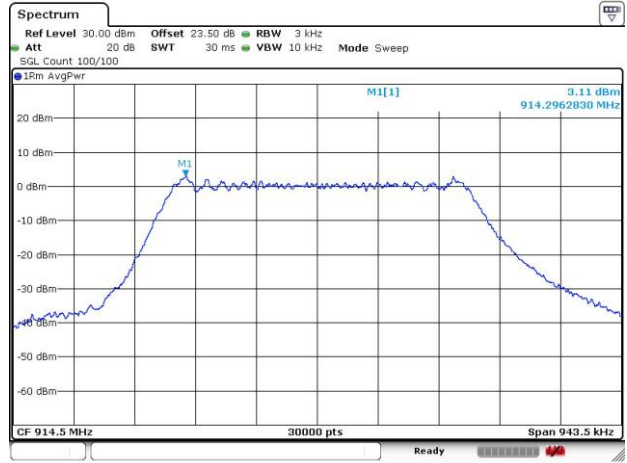

Date: 24 JUN 2022 01:13:25

Power Density (dBm/3kHz) Plot Channel 31

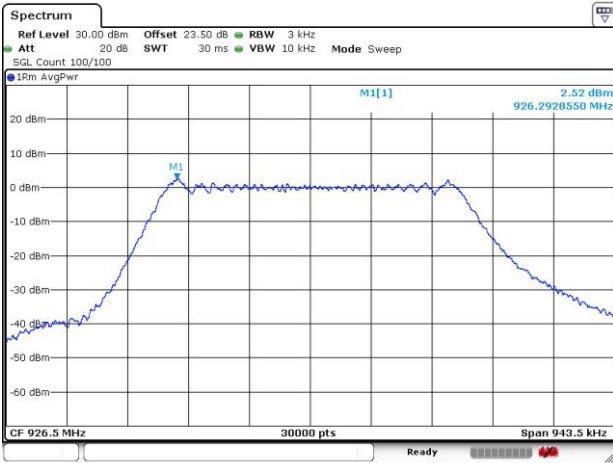


Date: 24 JUN 2022 01:26:10

N/A






# Band Edge and Spurious Emission

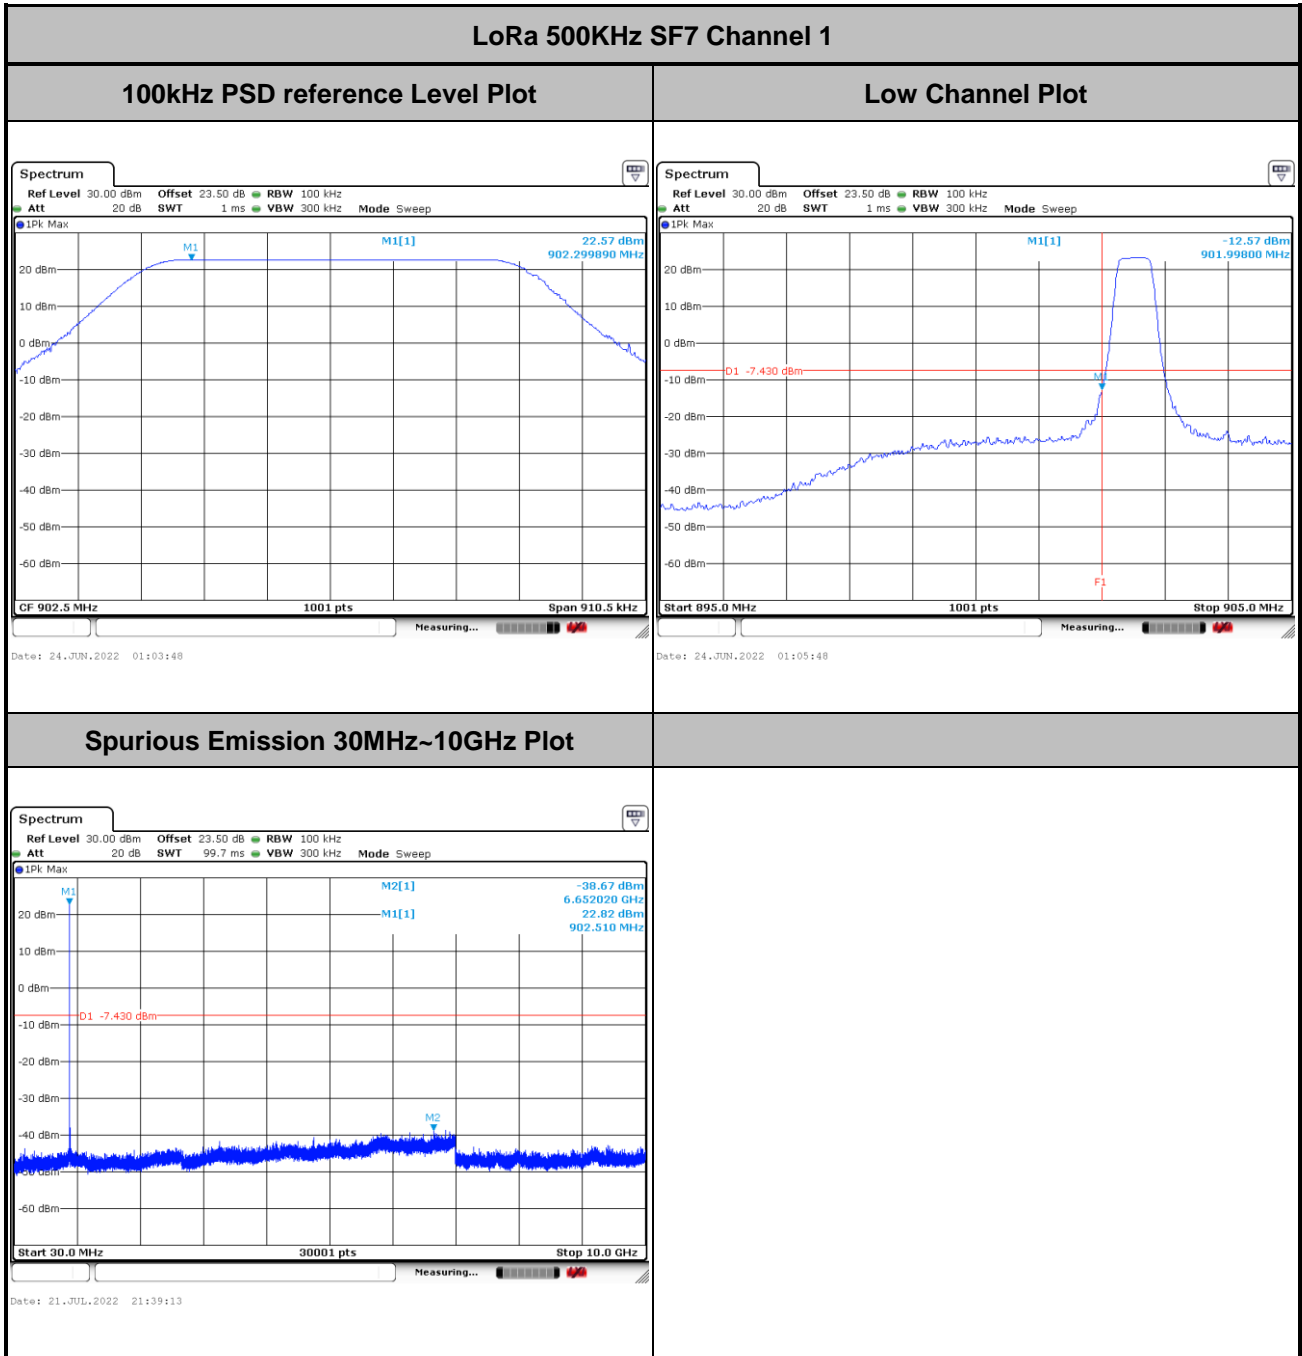



LoRa 500KHz SF7 Channel 16


100kHz PSD reference Level Plot

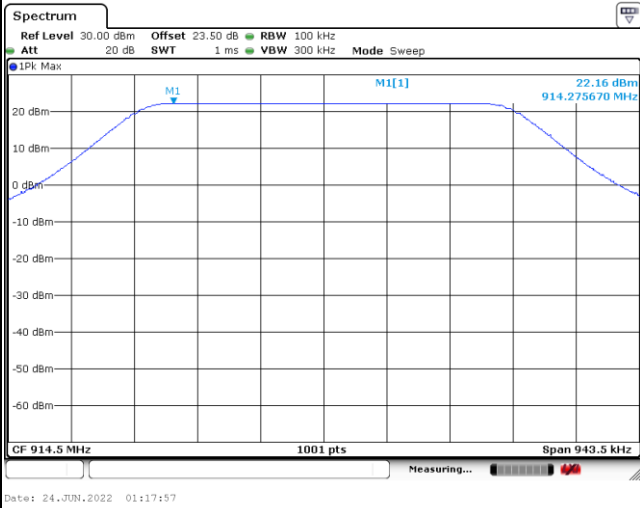

Middle Channel Plot

N/A


Spurious Emission 30MHz~10GHz Plot

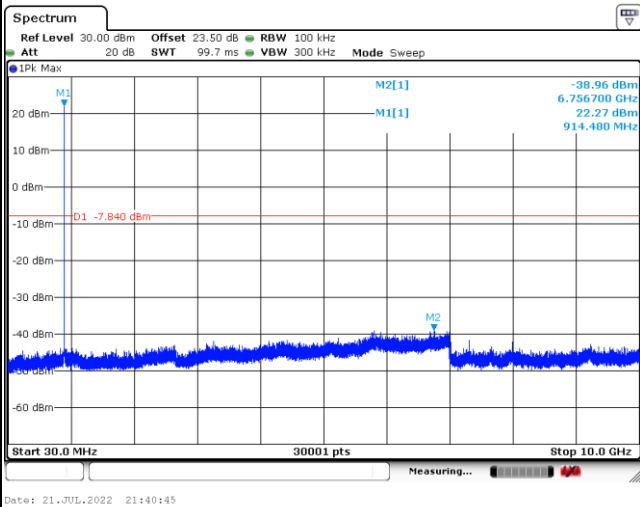




LoRa 500KHz SF7 Channel 31


100kHz PSD reference Level Plot

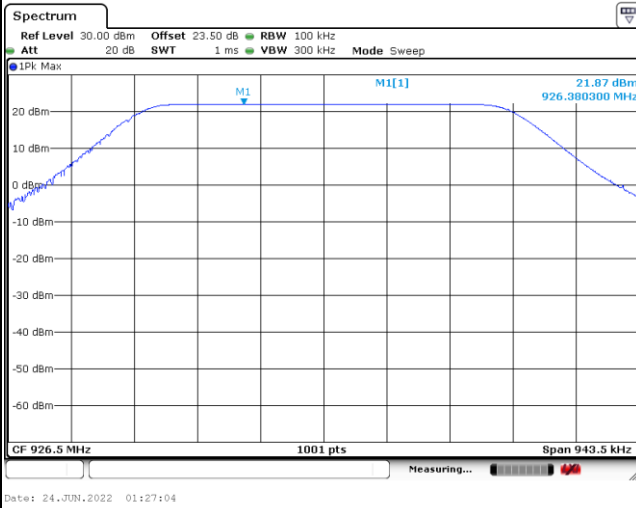

High Channel Plot

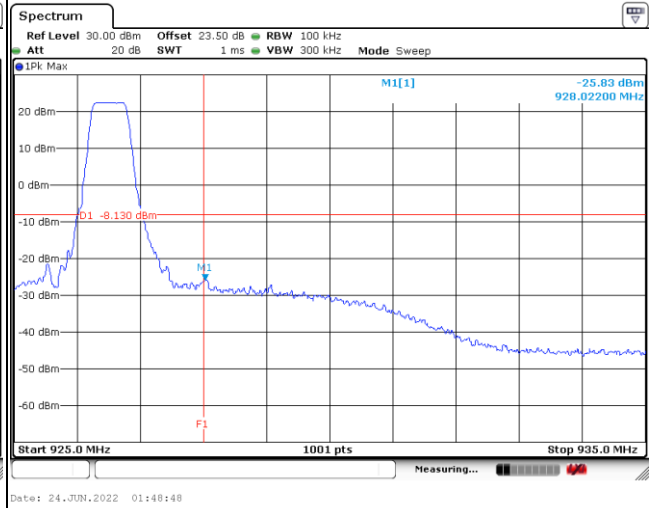

Spurious Emission 30MHz~10GHz Plot

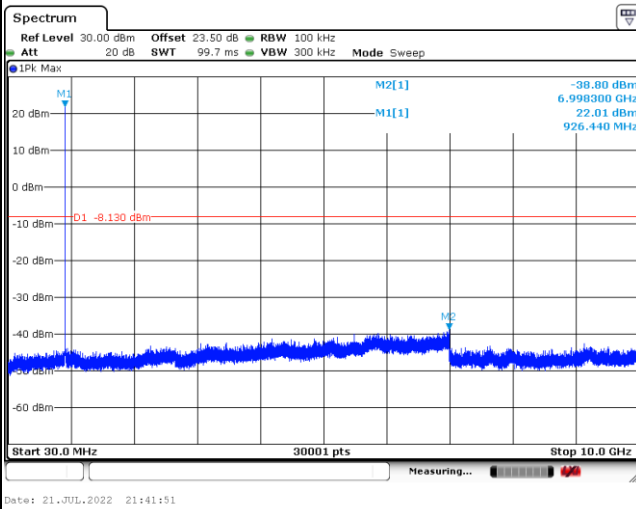




<Data Rate: SF8>

### 6dB Bandwidth

#### LoRa 500KHz SF8


6 dB Bandwidth Plot on Channel 1

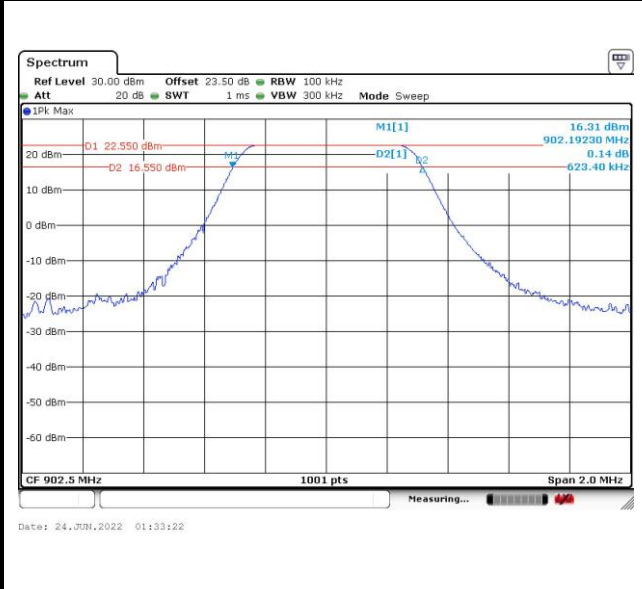

6 dB Bandwidth Plot on Channel 16



6 dB Bandwidth Plot on Channel 31

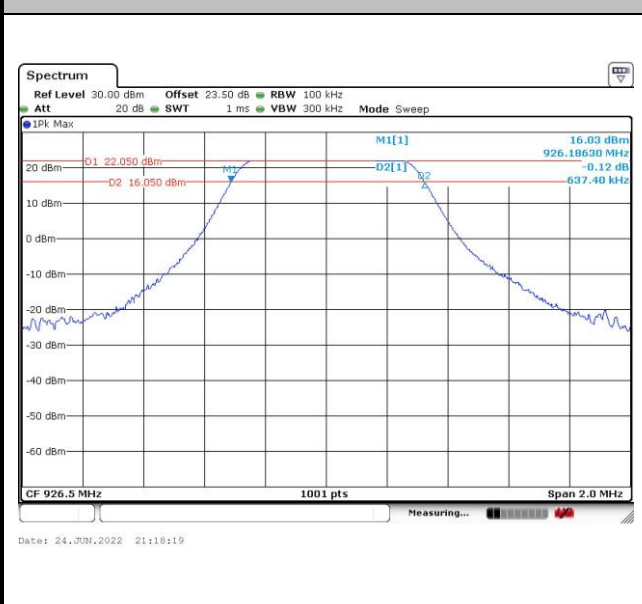




# 99% Occupied Bandwidth


## LoRa 500KHz SF8

### 99% Occupied Bandwidth Plot on Channel 1

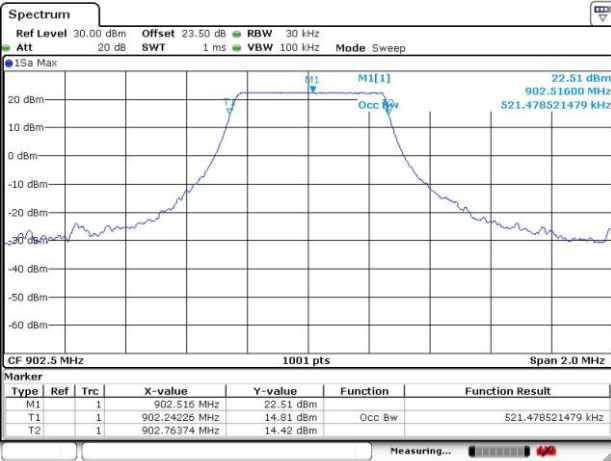

Date: 24.JUN.2022 01:42:32

### 99% Occupied Plot Bandwidth on Channel 16

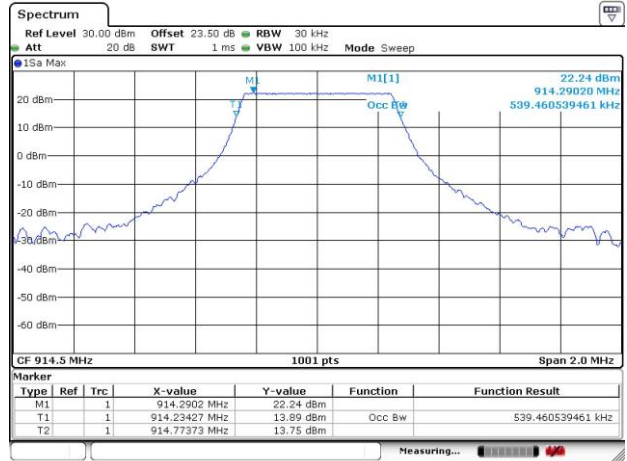

Date: 24.JUN.2022 21:11:32

### 99% Occupied Bandwidth Plot on Channel 31



Date: 24.JUN.2022 21:24:07


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




# Power Spectral Density (dBm/3kHz)

## LoRa 500KHz SF8


Power Density (dBm/3kHz) Plot Channel 1

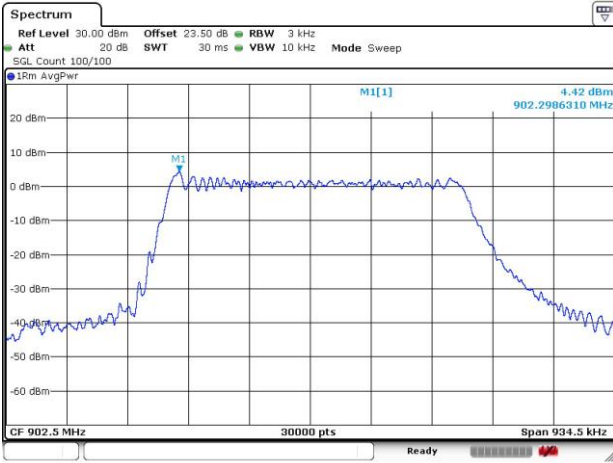

Power Density (dBm/3kHz) Plot Channel 16

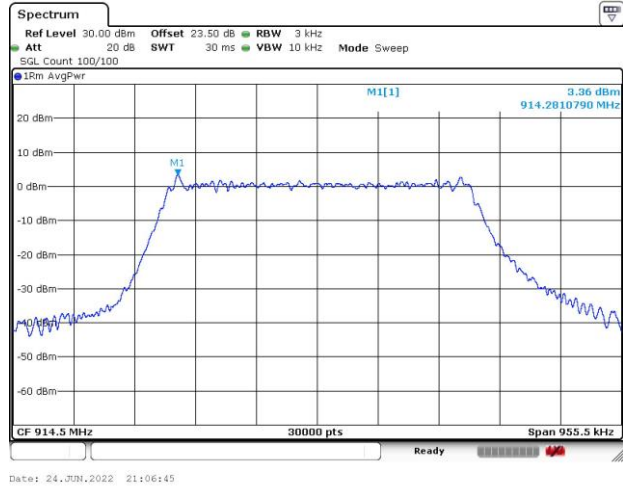


Power Density (dBm/3kHz) Plot Channel 31

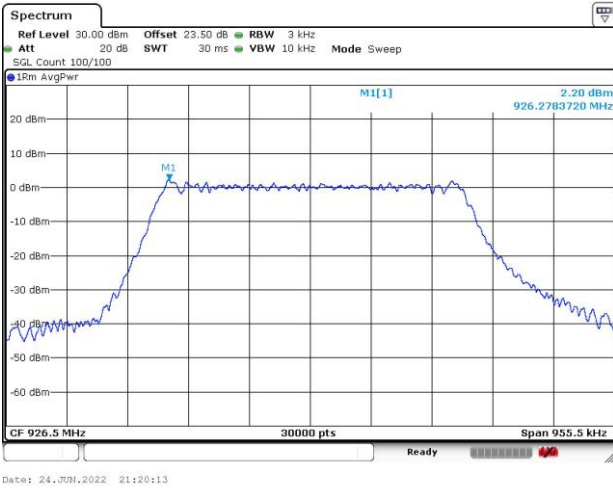




# Band Edge and Spurious Emission

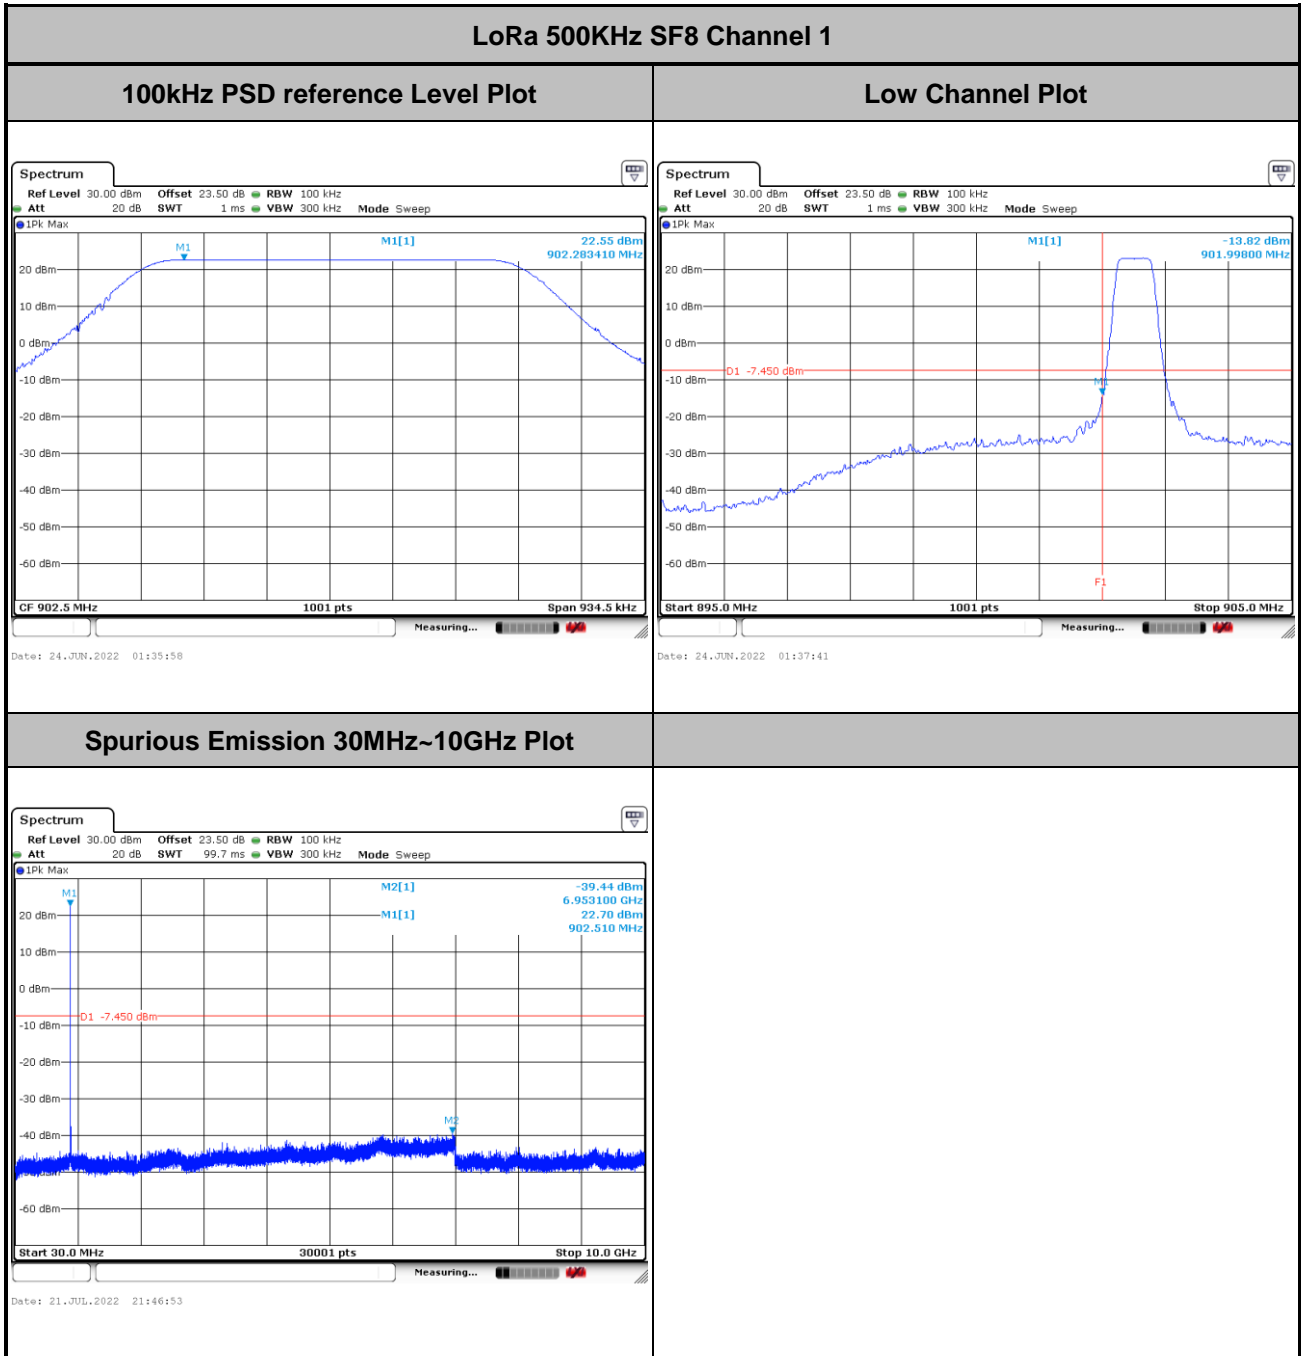



LoRa 500KHz SF8 Channel 16


100kHz PSD reference Level Plot

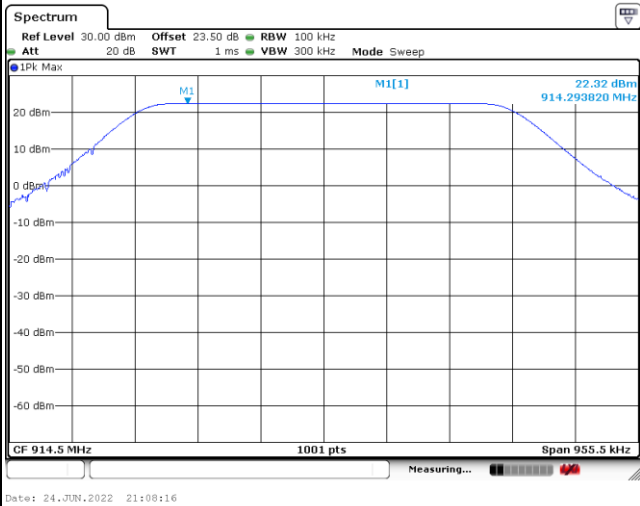

Middle Channel Plot

N/A

Spurious Emission 30MHz~10GHz Plot

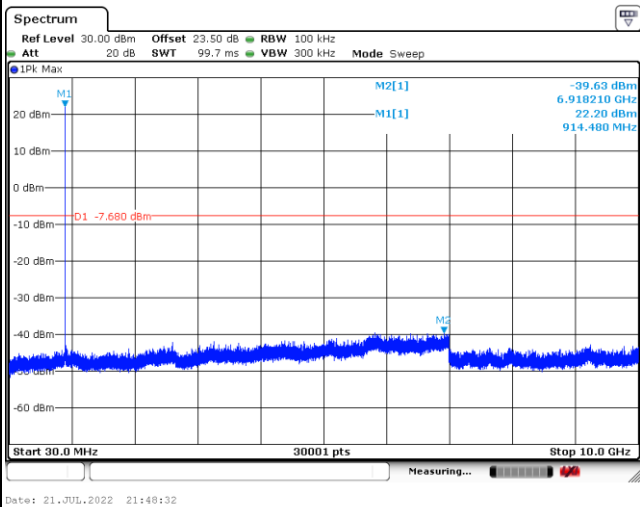







LoRa 500KHz SF8 Channel 31


100kHz PSD reference Level Plot

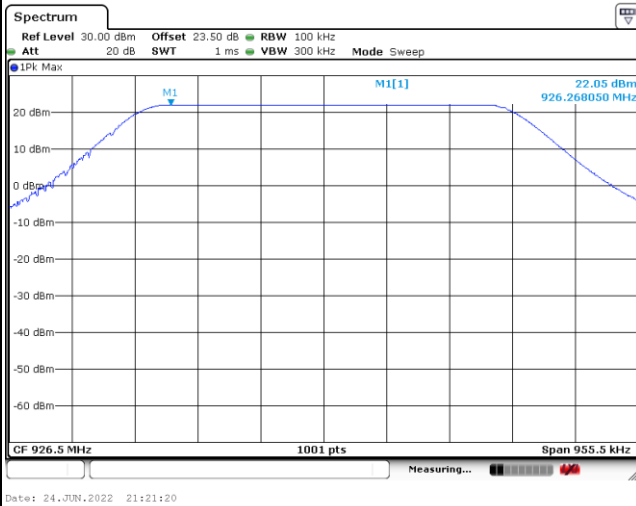

High Channel Plot

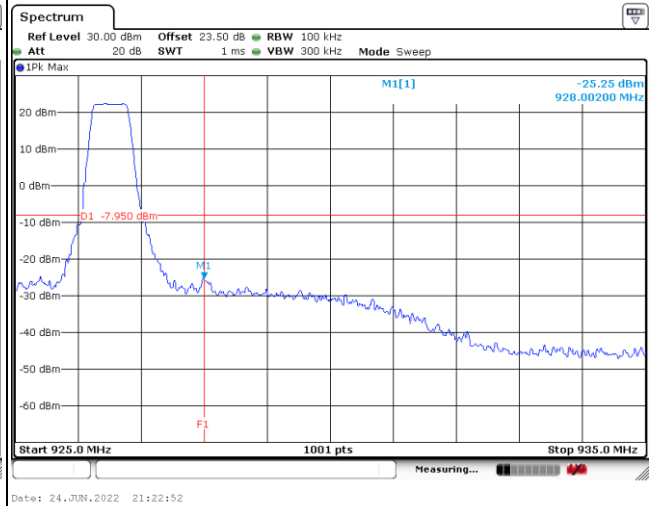

Spurious Emission 30MHz~10GHz Plot

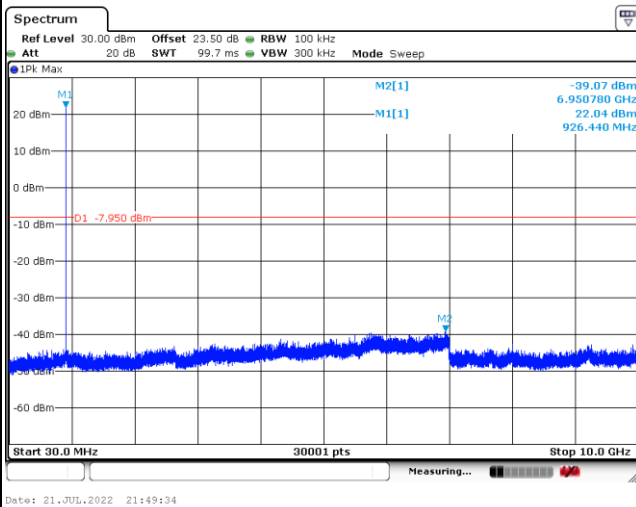



<Data Rate: SF9>


### 6dB Bandwidth

#### LoRa 500KHz SF9


6 dB Bandwidth Plot on Channel 1



6 dB Bandwidth Plot on Channel 16

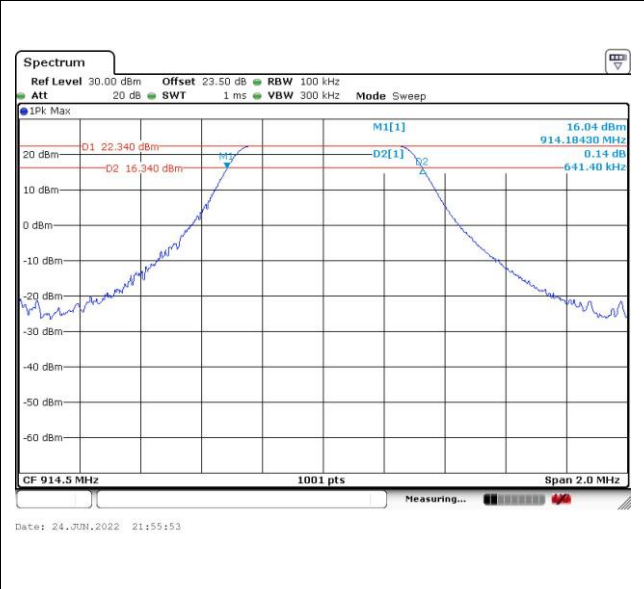

6 dB Bandwidth Plot on Channel 31

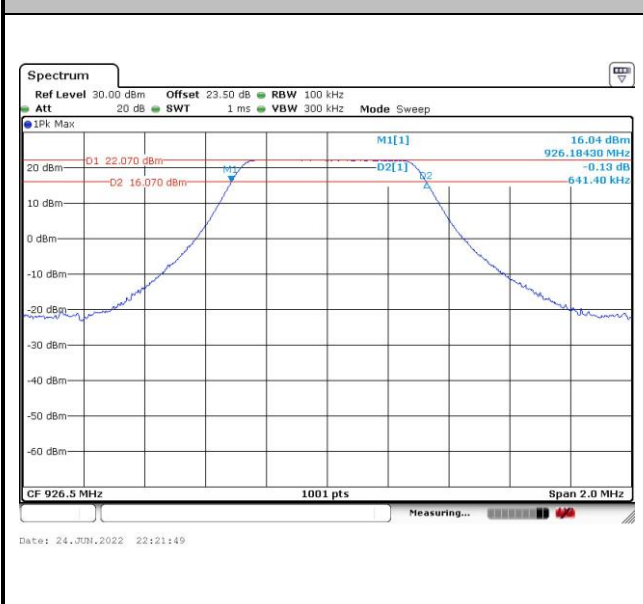





**99% Occupied Bandwidth**

**LoRa 500KHz SF9**


**99% Occupied Bandwidth Plot on Channel 1**

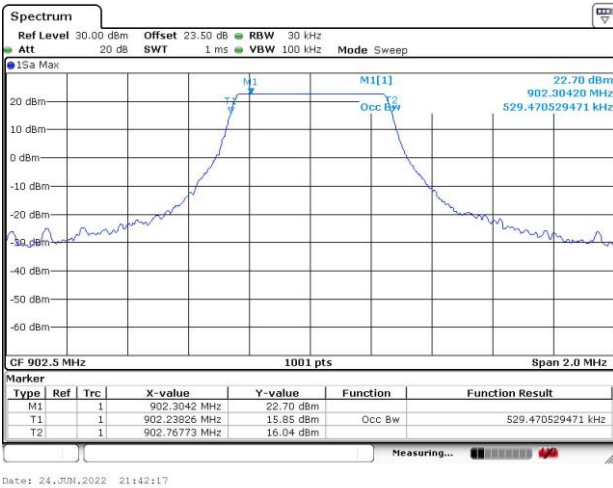

**99% Occupied Plot Bandwidth on Channel 16**

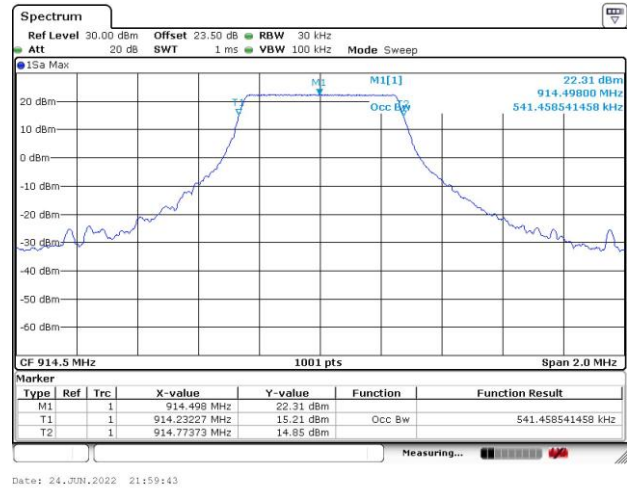

**99% Occupied Bandwidth Plot on Channel 31**

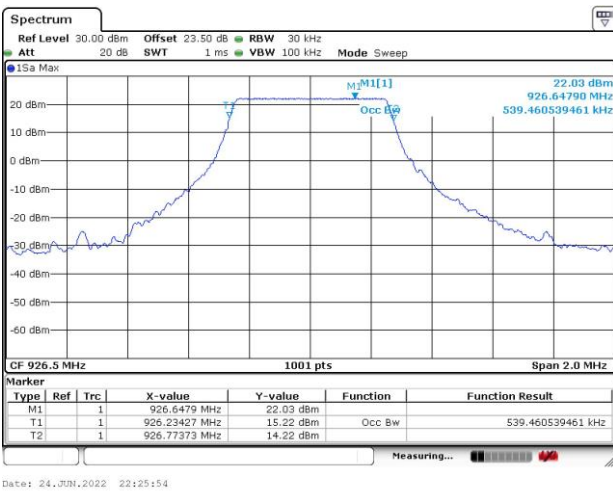


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




# Power Spectral Density (dBm/3kHz)

## LoRa 500KHz SF9


Power Density (dBm/3kHz) Plot Channel 1

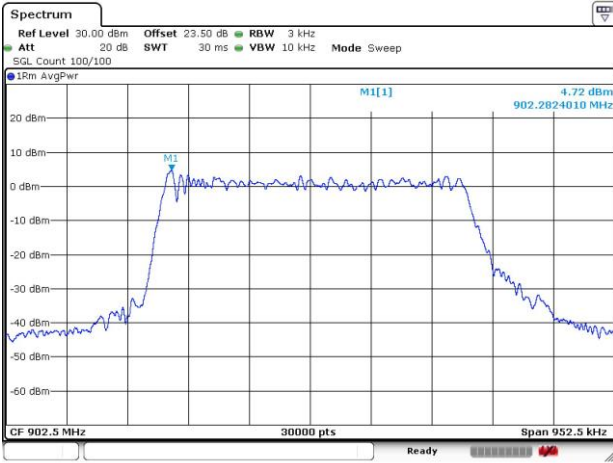

Power Density (dBm/3kHz) Plot Channel 16

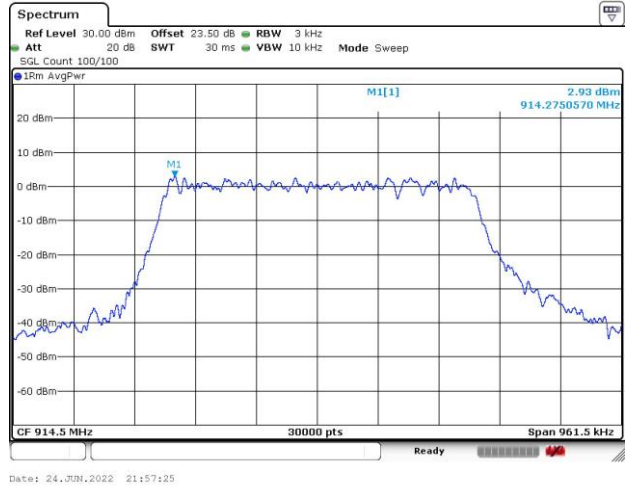


Power Density (dBm/3kHz) Plot Channel 31

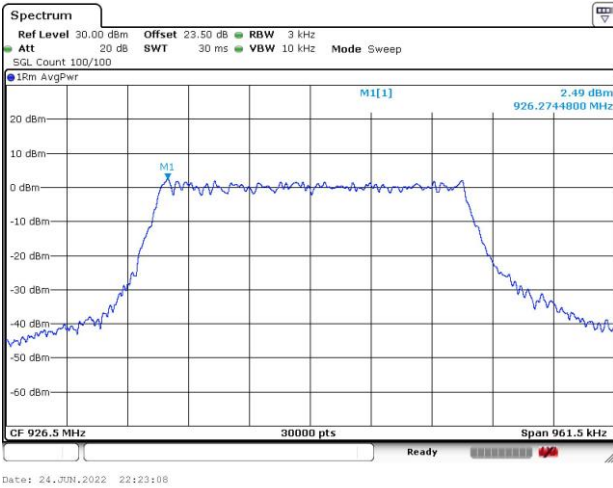




# Band Edge and Spurious Emission

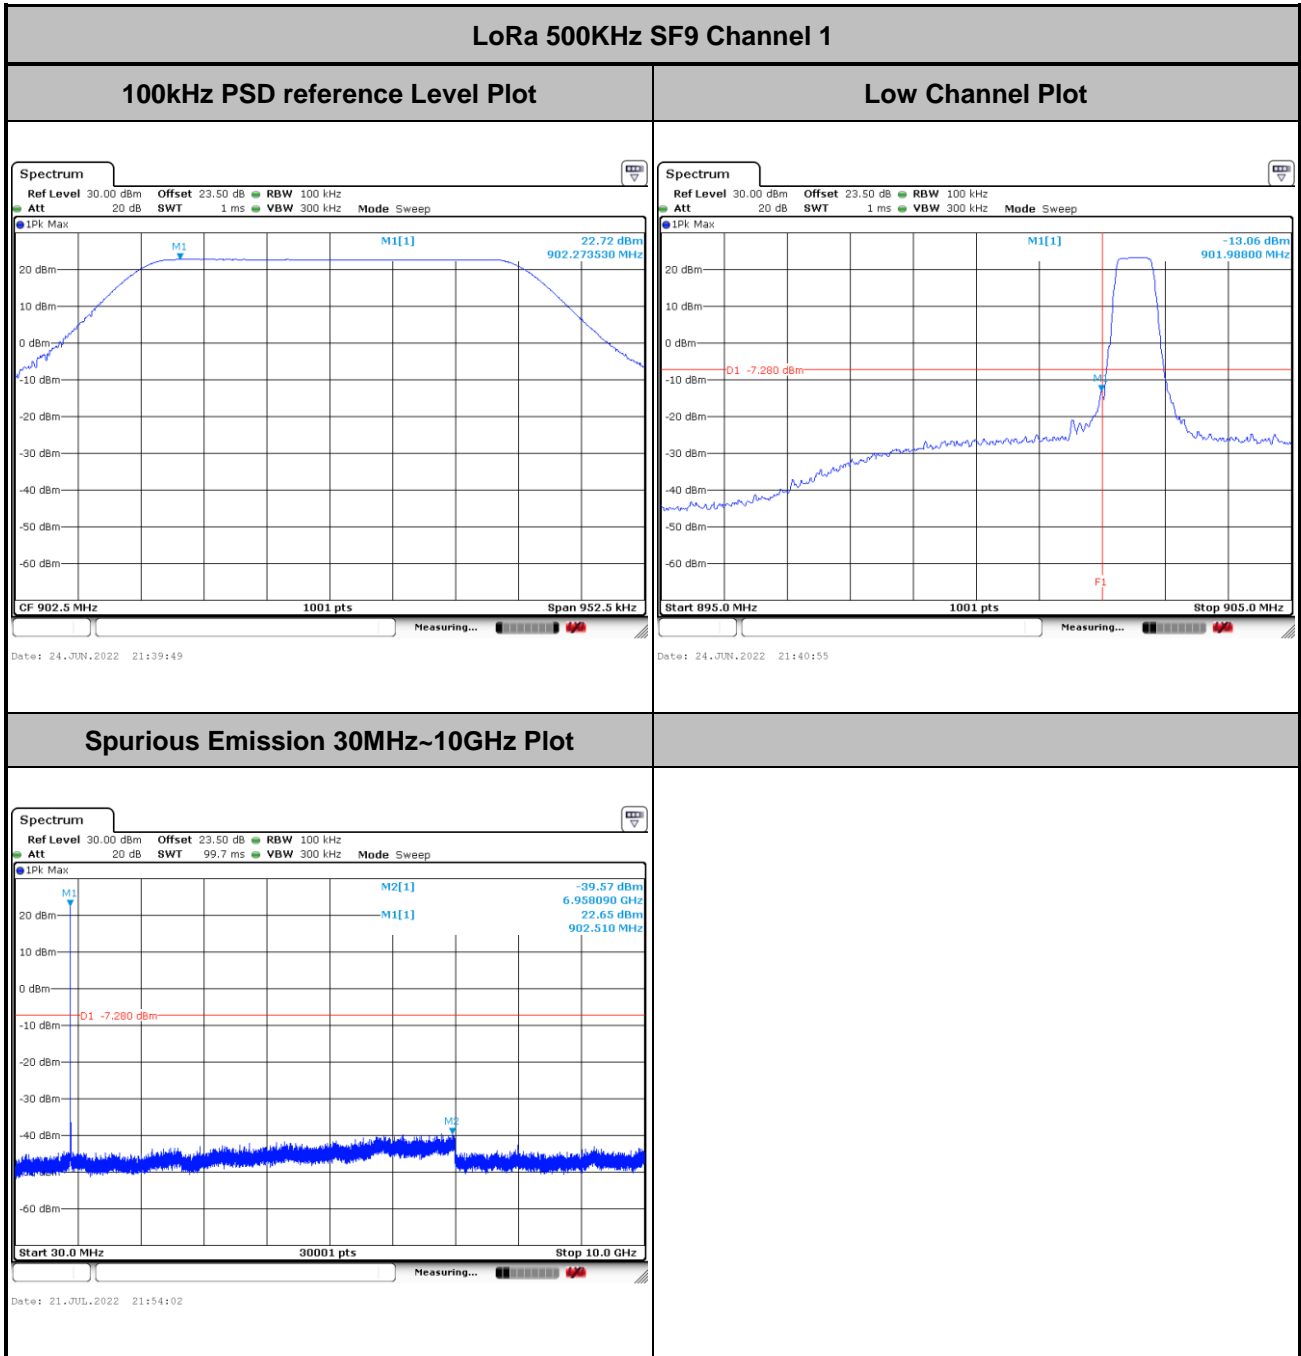



LoRa 500KHz SF9 Channel 16

100kHz PSD reference Level Plot

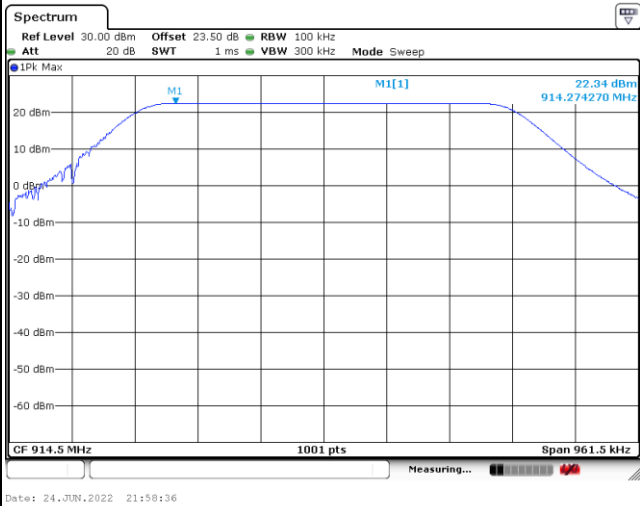


Date: 24.JUN.2022 21:59:36

Middle Channel Plot

N/A

Spurious Emission 30MHz~10GHz Plot

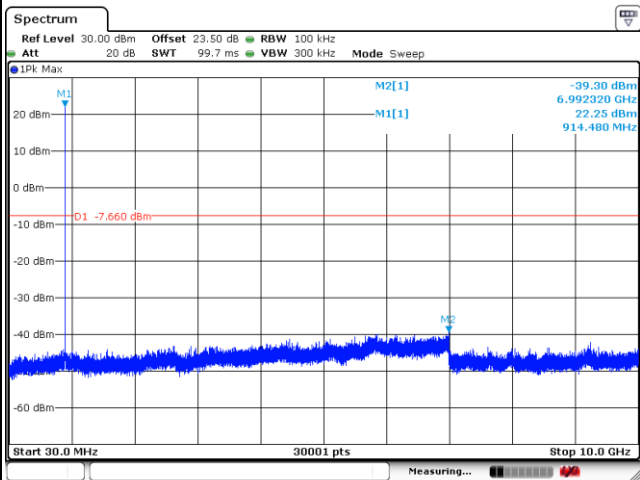


Date: 21.JUL.2022 21:55:18




LoRa 500KHz SF9 Channel 31

100kHz PSD reference Level Plot

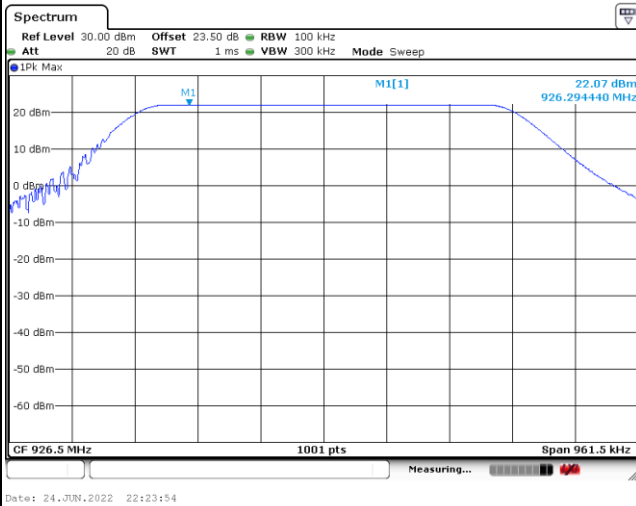


Date: 24.JUN.2022 22:23:54

High Channel Plot

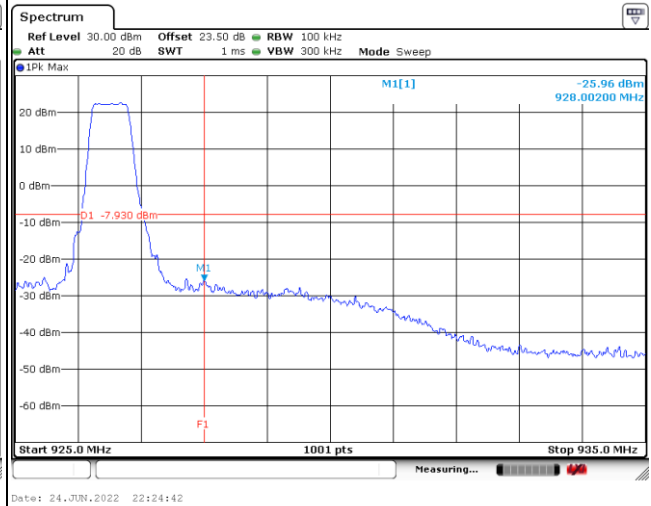

Date: 24.JUN.2022 22:24:42

Spurious Emission 30MHz~10GHz Plot

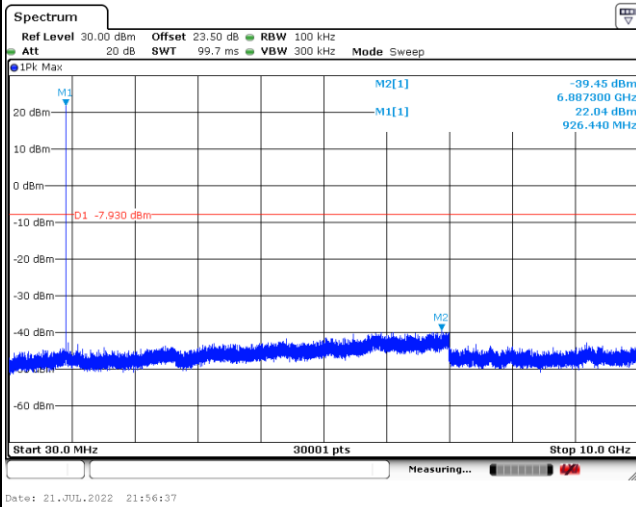

Date: 21.JUL.2022 21:56:37




<Data Rate: SF10>


### 6dB Bandwidth

#### LoRa 500KHz SF10


6 dB Bandwidth Plot on Channel 1

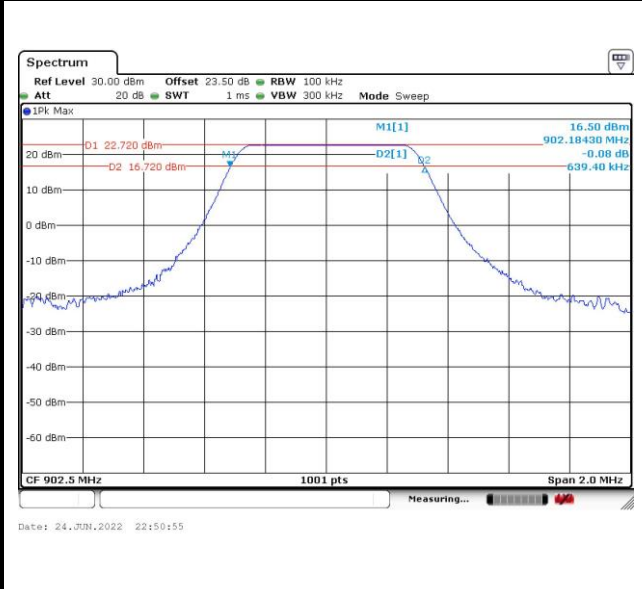

6 dB Bandwidth Plot on Channel 16

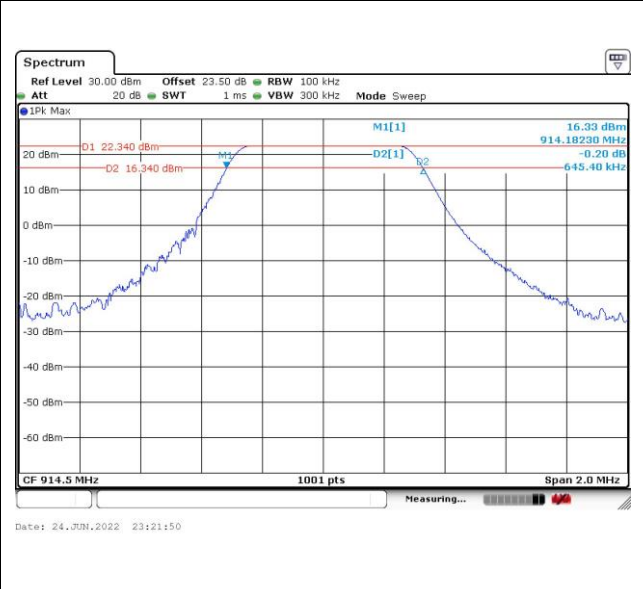

6 dB Bandwidth Plot on Channel 31

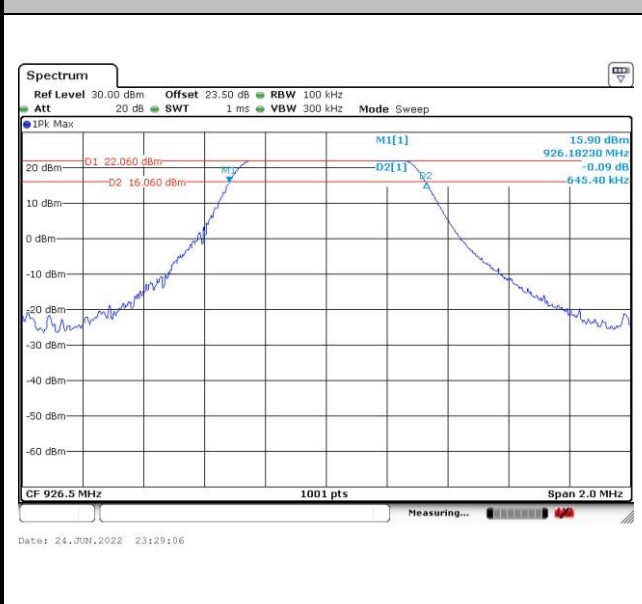






# 99% Occupied Bandwidth

## LoRa 500KHz SF10


### 99% Occupied Bandwidth Plot on Channel 1

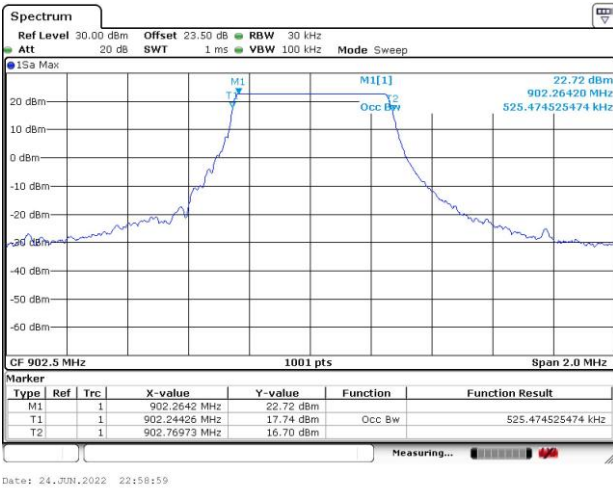

### 99% Occupied Plot Bandwidth on Channel 16



### 99% Occupied Bandwidth Plot on Channel 31

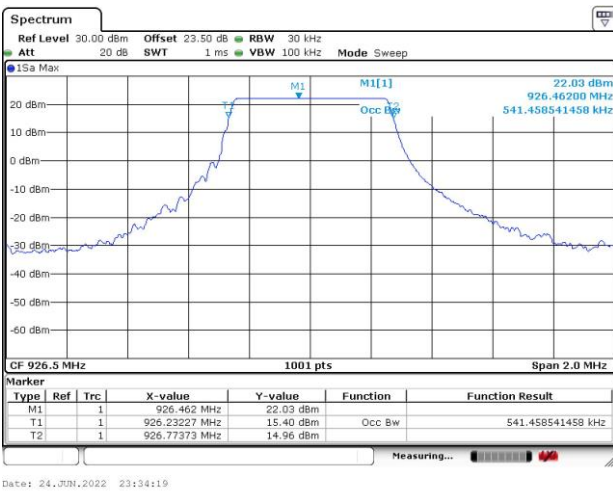


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




# Power Spectral Density (dBm/3kHz)

## LoRa 500KHz SF10


Power Density (dBm/3kHz) Plot Channel 1

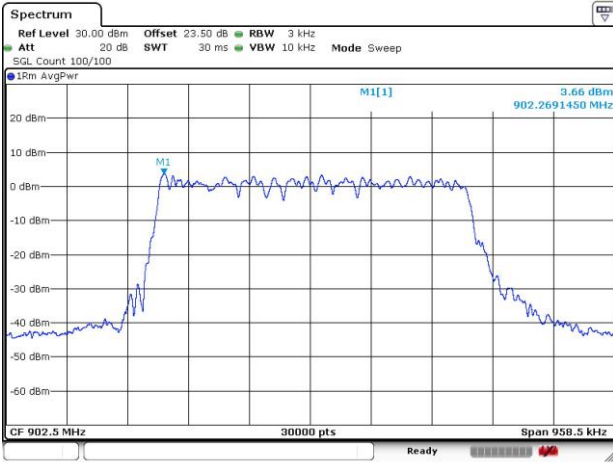

Power Density (dBm/3kHz) Plot Channel 16

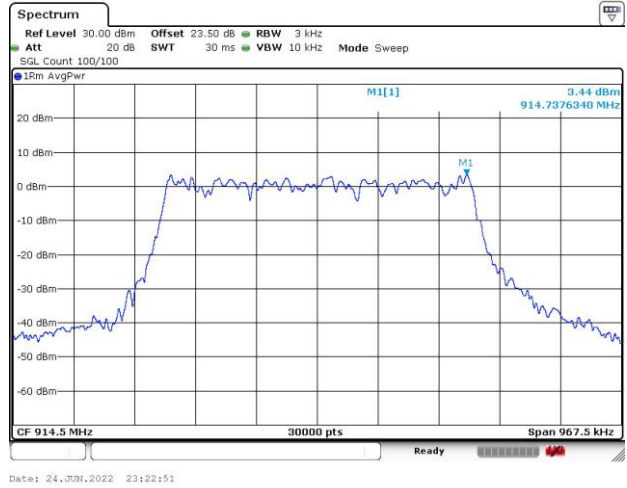

Power Density (dBm/3kHz) Plot Channel 31

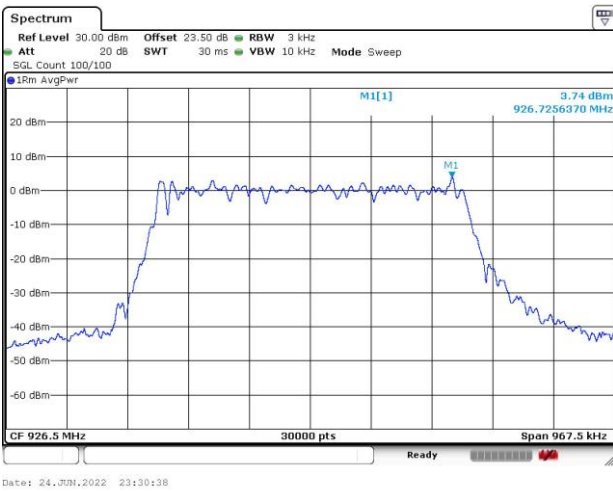




# Band Edge and Spurious Emission


## LoRa 500KHz SF10 Channel 1

### 100kHz PSD reference Level Plot

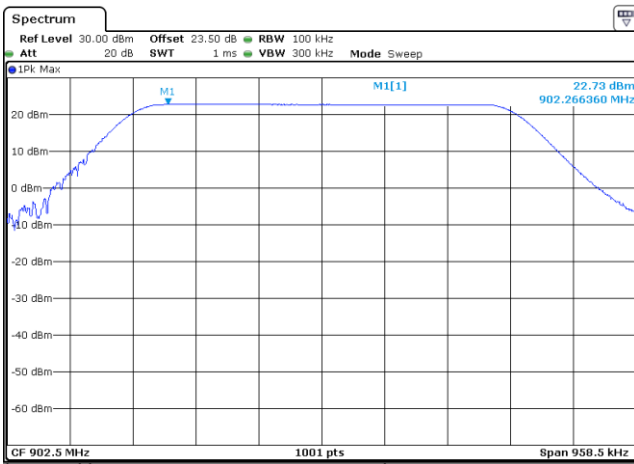


Date: 24.JUN.2022 22:53:47

### Low Channel Plot

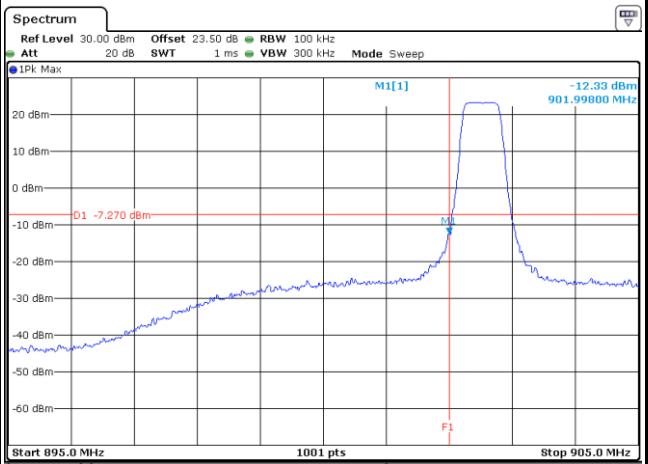

Date: 24.JUN.2022 22:58:07

### Spurious Emission 30MHz~10GHz Plot

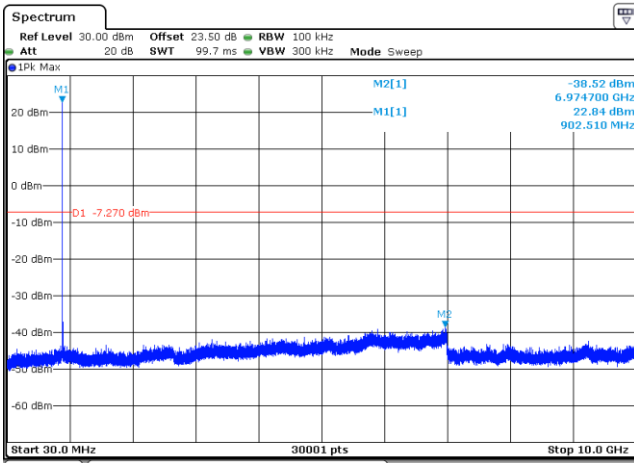


Date: 21.JUL.2022 22:00:20






LoRa 500KHz SF10 Channel 31


100kHz PSD reference Level Plot

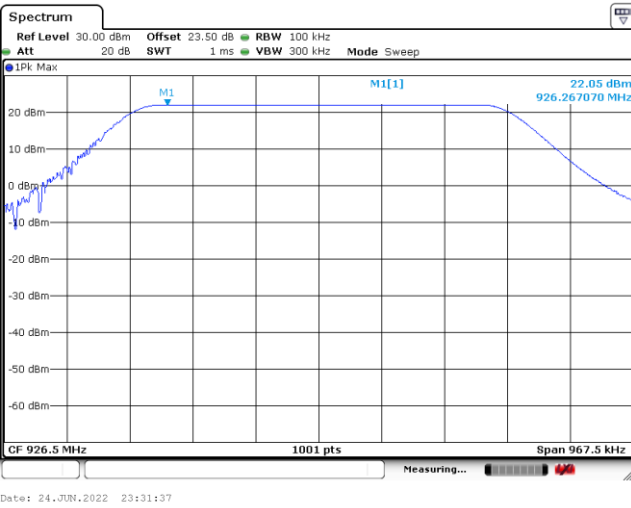

High Channel Plot

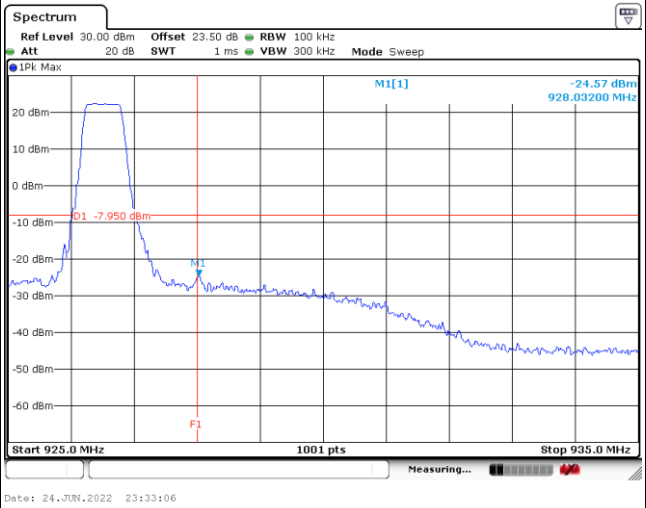

Spurious Emission 30MHz~10GHz Plot

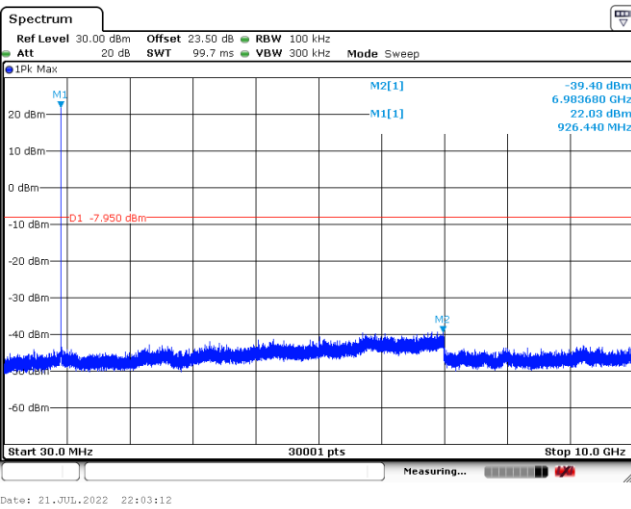




<Data Rate: SF11>

### 6dB Bandwidth

#### LoRa 500KHz SF11


6 dB Bandwidth Plot on Channel 1

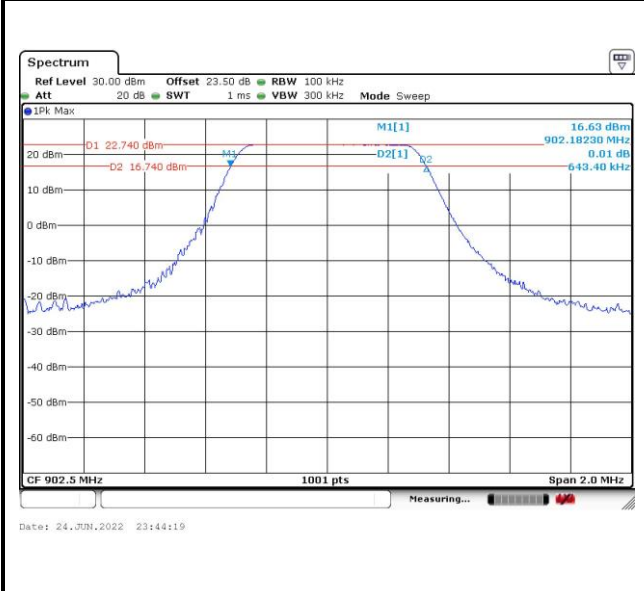

6 dB Bandwidth Plot on Channel 16



6 dB Bandwidth Plot on Channel 31

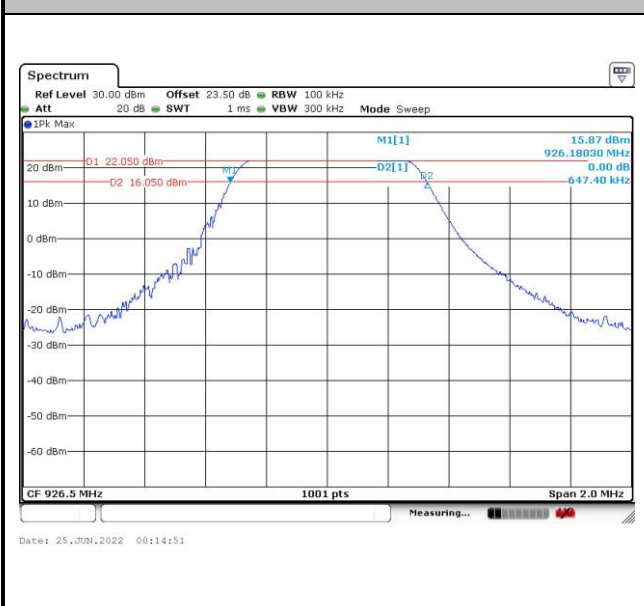





# 99% Occupied Bandwidth

## LoRa 500KHz SF11


### 99% Occupied Bandwidth Plot on Channel 1

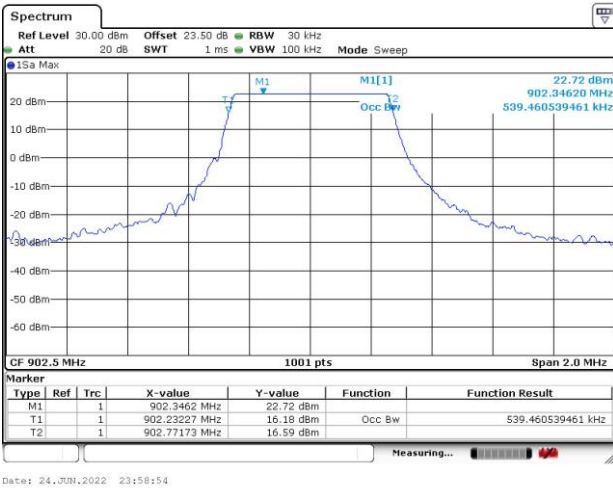

### 99% Occupied Plot Bandwidth on Channel 16

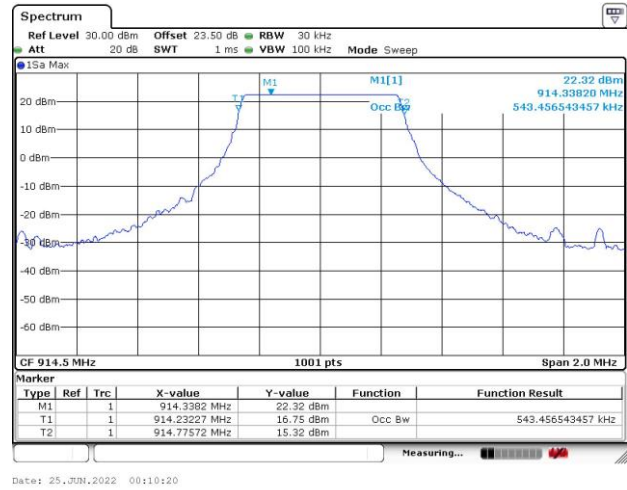

### 99% Occupied Bandwidth Plot on Channel 31

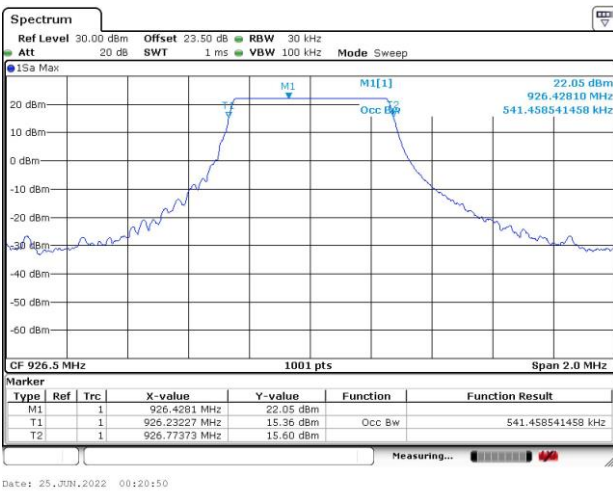


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




# Power Spectral Density (dBm/3kHz)

## LoRa 500KHz SF11


Power Density (dBm/3kHz) Plot Channel 1

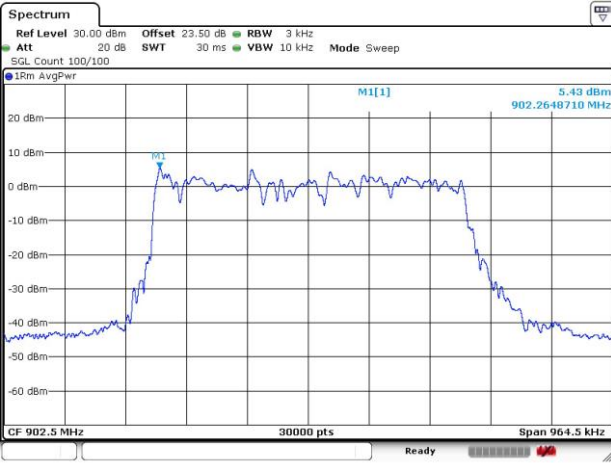

Power Density (dBm/3kHz) Plot Channel 16

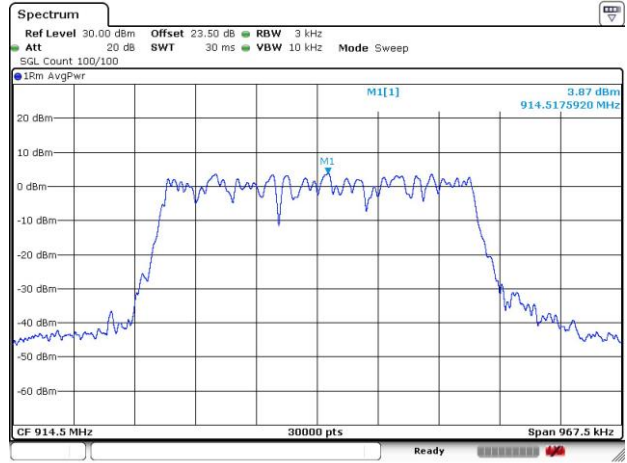


Power Density (dBm/3kHz) Plot Channel 31

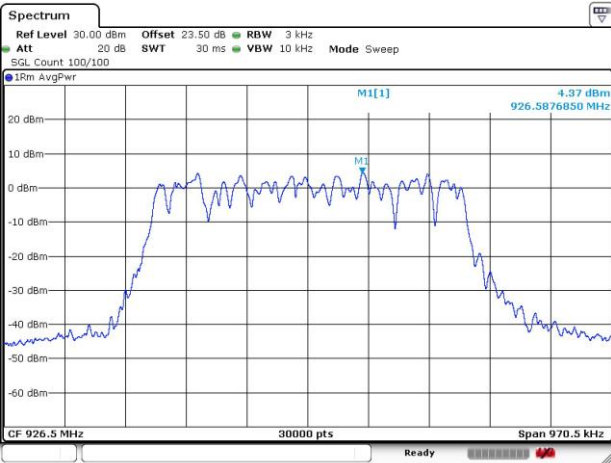





# Band Edge and Spurious Emission

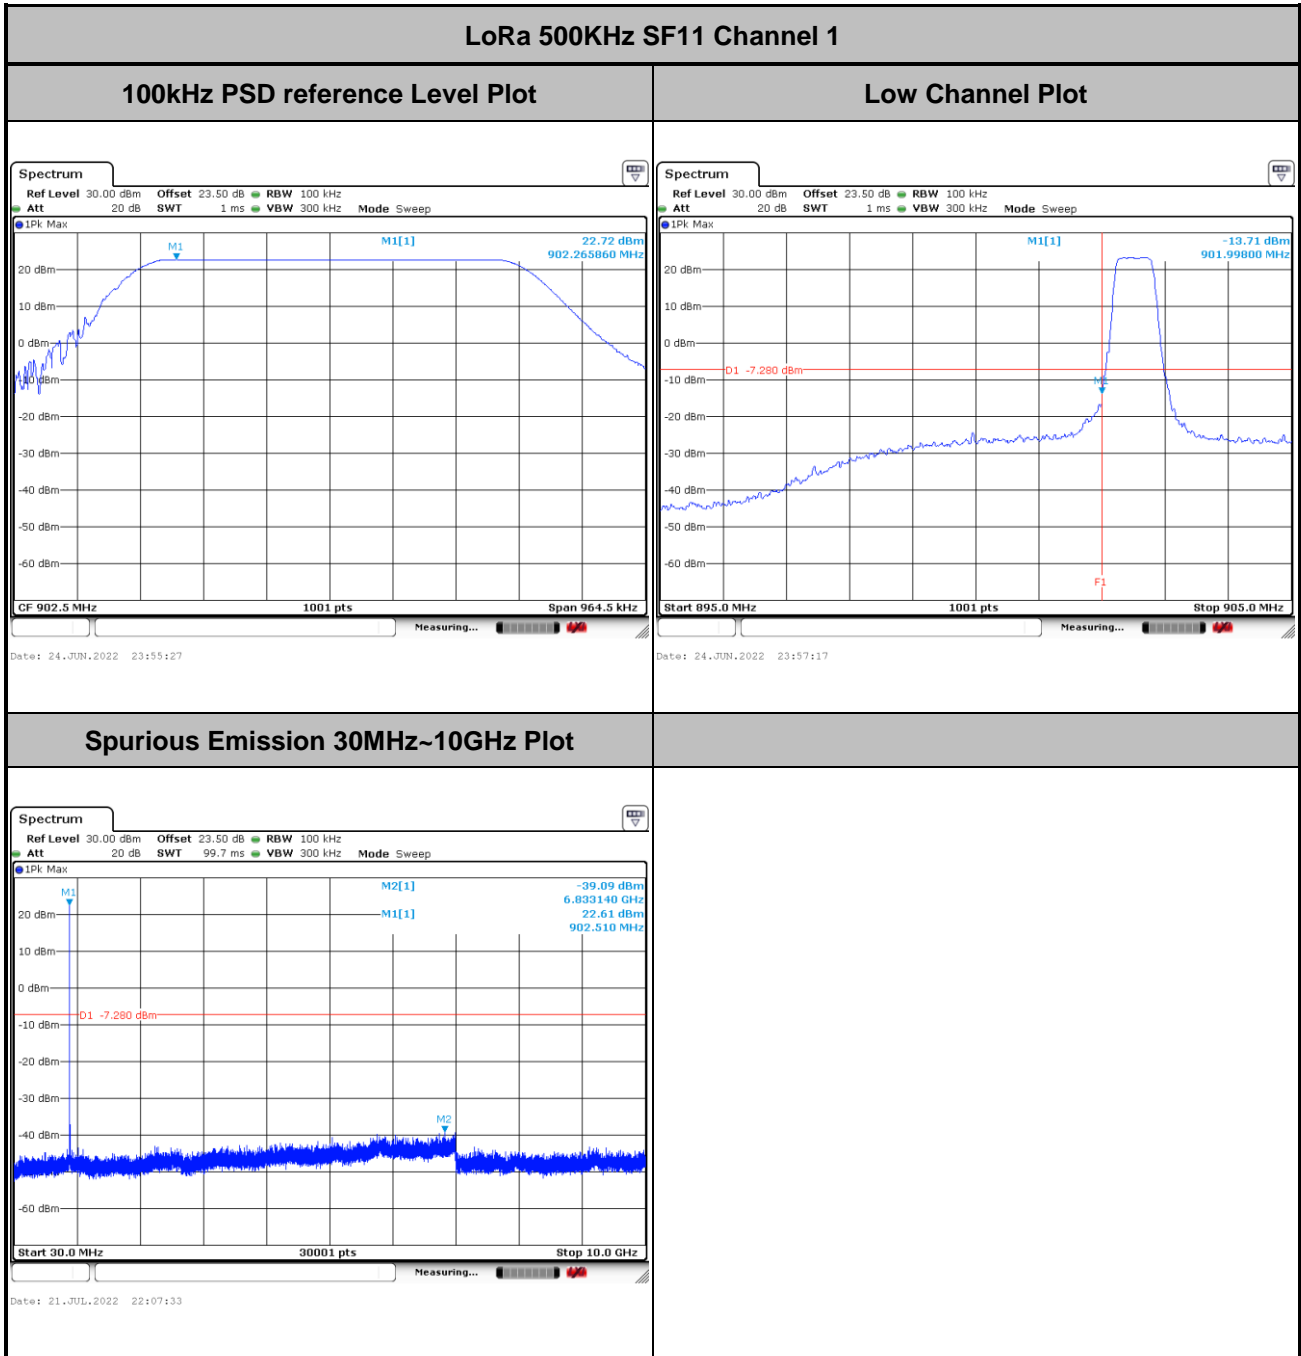




LoRa 500KHz SF11 Channel 16


100kHz PSD reference Level Plot

Middle Channel Plot

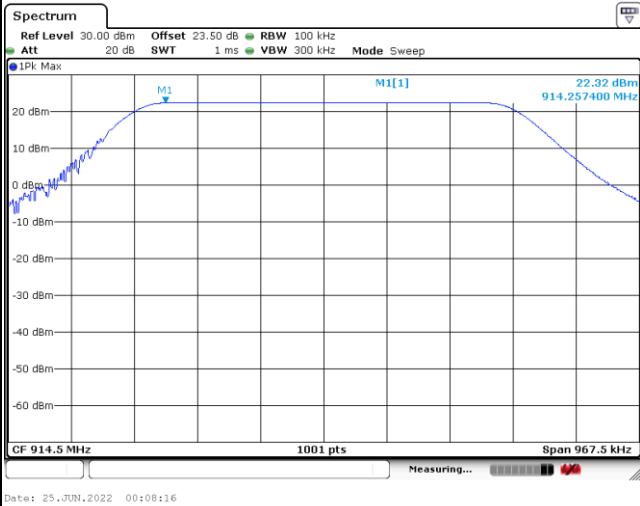

N/A


Spurious Emission 30MHz~10GHz Plot

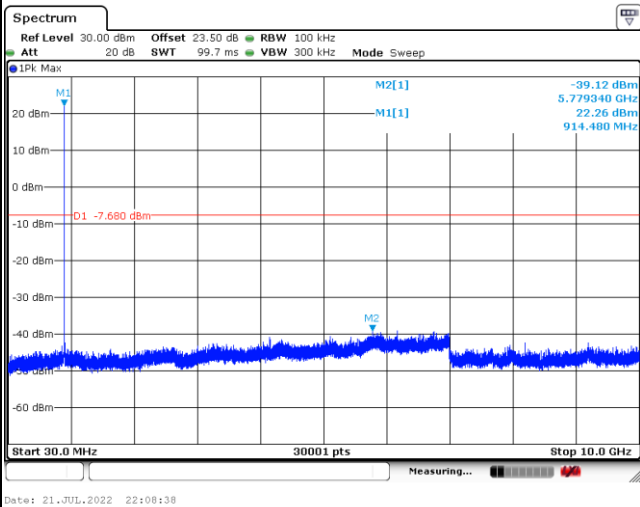




LoRa 500KHz SF11 Channel 31


100kHz PSD reference Level Plot

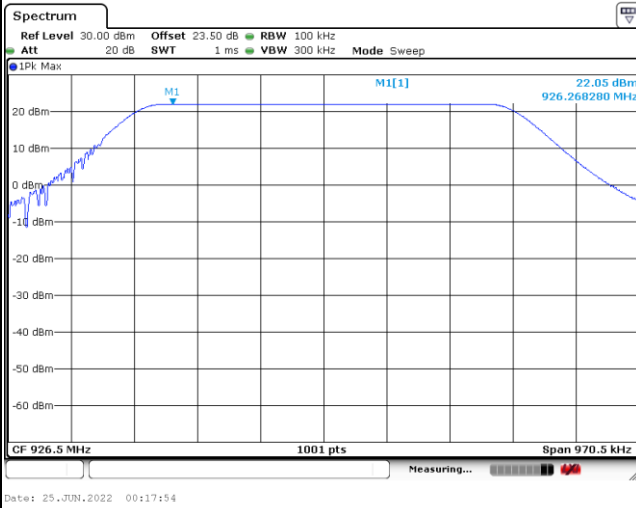

High Channel Plot

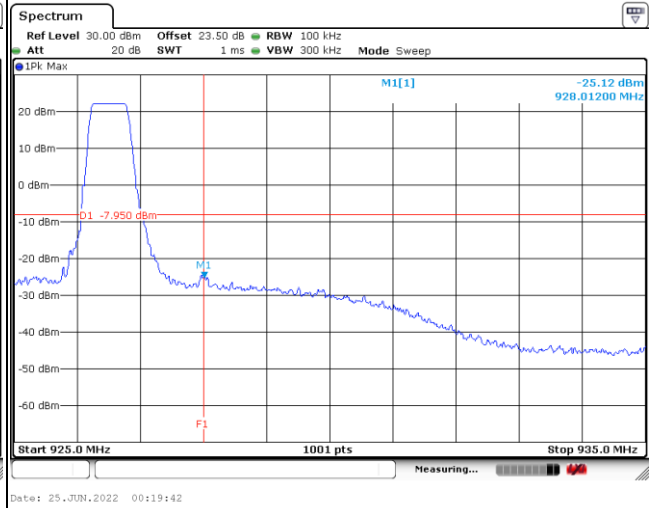

Spurious Emission 30MHz~10GHz Plot

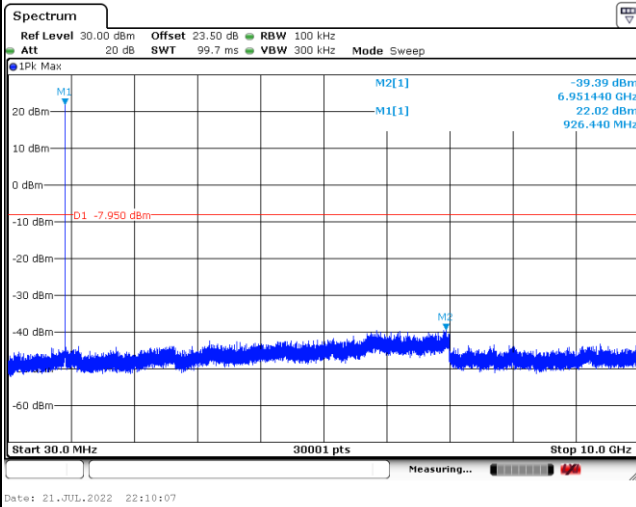




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	22.4~25.6°C
		Relative Humidity :	48.2~57.1%

## EUT Information

Report NO : 242615  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

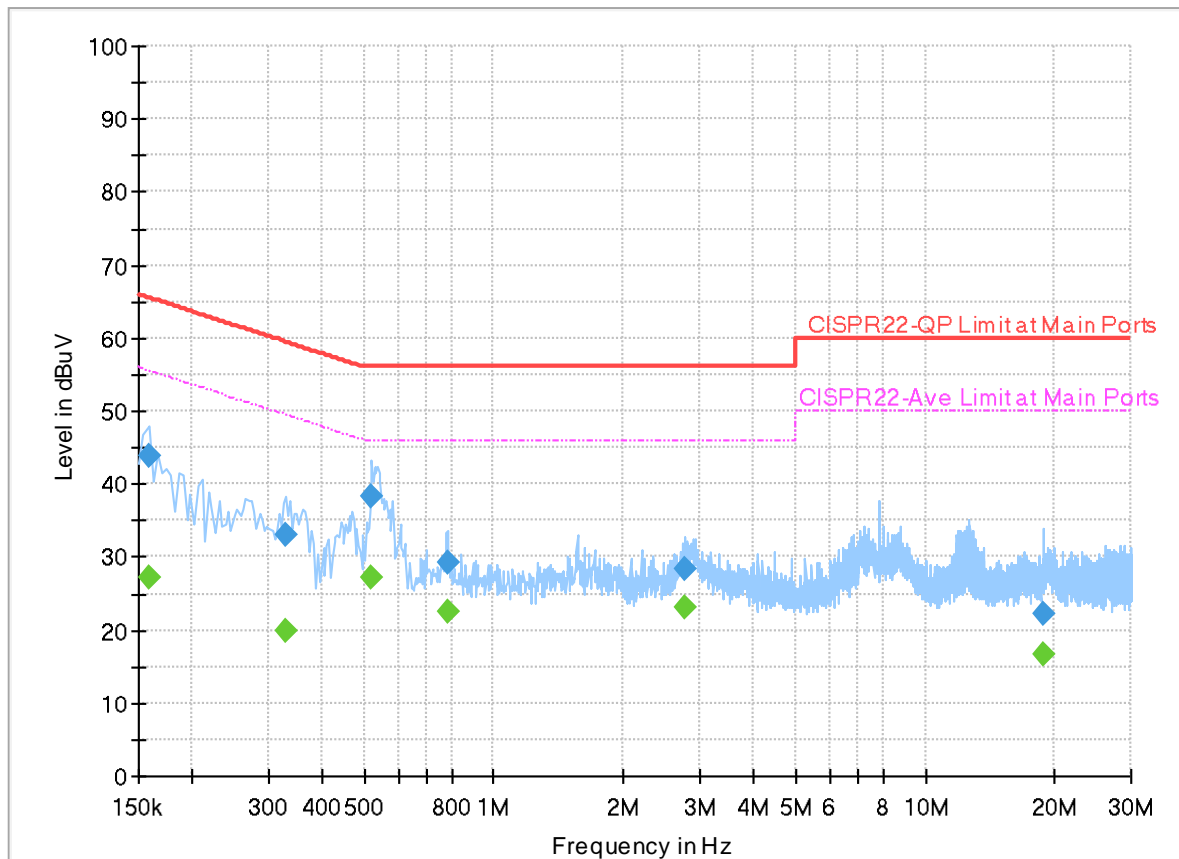


## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.158000	---	27.24	55.57	28.33	L1	OFF	20.0
0.158000	43.78	---	65.57	21.79	L1	OFF	20.0
0.330000	---	19.90	49.45	29.55	L1	OFF	20.0
0.330000	32.90	---	59.45	26.55	L1	OFF	20.0
0.522000	---	27.13	46.00	18.87	L1	OFF	20.0
0.522000	38.39	---	56.00	17.61	L1	OFF	20.0
0.782000	---	22.38	46.00	23.62	L1	OFF	20.0
0.782000	29.11	---	56.00	26.89	L1	OFF	20.0
2.778000	---	23.24	46.00	22.76	L1	OFF	20.0
2.778000	28.35	---	56.00	27.65	L1	OFF	20.0
18.826000	---	16.71	50.00	33.29	L1	OFF	20.2
18.826000	22.14	---	60.00	37.86	L1	OFF	20.2

## EUT Information

Report NO : 242615  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

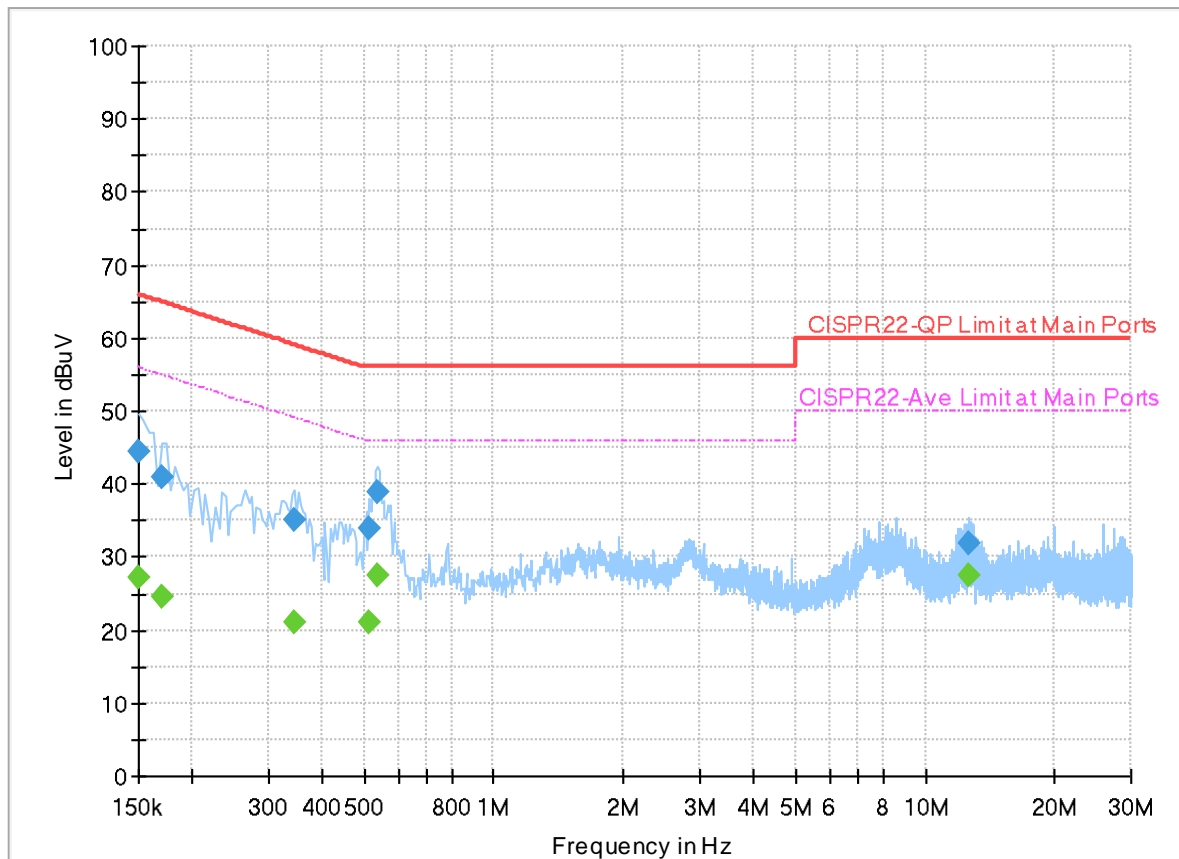

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	27.25	56.00	28.75	N	OFF	20.0
0.150000	44.49	---	66.00	21.51	N	OFF	20.0
0.170000	---	24.66	54.96	30.30	N	OFF	20.0
0.170000	40.91	---	64.96	24.05	N	OFF	20.0
0.346000	---	21.01	49.06	28.05	N	OFF	20.0
0.346000	34.96	---	59.06	24.10	N	OFF	20.0
0.514000	---	21.10	46.00	24.90	N	OFF	20.0
0.514000	34.05	---	56.00	21.95	N	OFF	20.0
0.538000	---	27.36	46.00	18.64	N	OFF	20.0
0.538000	39.03	---	56.00	16.97	N	OFF	20.0
12.686000	---	27.60	50.00	22.40	N	OFF	20.2
12.686000	32.01	---	60.00	27.99	N	OFF	20.2



### Appendix C. Radiated Spurious Emission

Test Engineer :	Yuan Lee and Troye Hsieh	Temperature :	20~21.5°C
		Relative Humidity :	56.4~67.6%

LoRa 902~928MHz

LoRa DTS 500KHz\_SF7 (Band Edge @ 3m)

LoRa	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
LoRa DTS 500KHz CH 01 902.5MHz		30	32.8	-7.2	40	30.06	24.27	10.83	32.36	-	-	P	H	
		125.06	26.17	-17.33	43.5	29.66	17.34	11.59	32.42	-	-	P	H	
		264.74	29.25	-16.75	46	29.45	19.61	12.43	32.24	-	-	P	H	
		379.2	31.61	-14.39	46	29.63	20.89	12.87	31.78	-	-	P	H	
		463.59	34.87	-11.13	46	30.48	23.21	13.16	31.98	-	-	P	H	
		593.57	37.21	-8.79	46	31	25.39	13.65	32.83	-	-	P	H	
	*	902.5	121.03	-	-	108.8	28.85	14.59	31.21	100	147	P	H	
														H
														H
			30	33.26	-6.74	40	30.52	24.27	10.83	32.36	-	-	P	V
			97.9	26.84	-16.66	43.5	32.43	15.41	11.38	32.38	-	-	P	V
			262.8	29.4	-16.6	46	29.64	19.59	12.42	32.25	-	-	P	V
			427.7	34.52	-11.48	46	30.63	22.66	13.05	31.82	-	-	P	V
			496.57	36.19	-9.81	46	31.25	23.78	13.28	32.12	-	-	P	V
			557.68	36.92	-9.08	46	30.1	25.83	13.56	32.57	-	-	P	V
	*		902.5	111.43	-	-	99.2	28.85	14.59	31.21	102	74	P	V
													V	
													V	

Remark	1. No other spurious found.
	2. All results are PASS against limit line.
	3. Non restricted band limit is radio frequency level down 20db
	4. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.



LoRa	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
LoRa DTS 500KHz CH 16 914.5MHz		30	31.85	-8.15	40	29.11	24.27	10.83	32.36	-	-	P	H	
		135.73	26.88	-16.62	43.5	30.28	17.32	11.71	32.43	-	-	P	H	
		262.8	28.99	-17.01	46	29.23	19.59	12.42	32.25	-	-	P	H	
		311.3	30.15	-15.85	46	30.31	19.24	12.64	32.04	-	-	P	H	
		492.69	35.43	-10.57	46	30.54	23.73	13.27	32.11	-	-	P	H	
		550.89	36.59	-9.41	46	30.42	25.15	13.54	32.52	-	-	P	H	
	*	914.5	121.03	-	-	108.6	28.95	14.61	31.13	100	149	P	H	
														H
														H
														H
														H
														H
			30.97	33	-7	40	31.04	23.53	10.8	32.37	-	-	P	V
			97.9	27.52	-15.98	43.5	33.11	15.41	11.38	32.38	-	-	P	V
			118.27	26.33	-17.17	43.5	30.01	17.18	11.55	32.41	-	-	P	V
			310.33	29.91	-16.09	46	30.1	19.22	12.63	32.04	-	-	P	V
			492.69	35.49	-10.51	46	30.6	23.73	13.27	32.11	-	-	P	V
			559.62	36.86	-9.14	46	29.92	25.95	13.57	32.58	-	-	P	V
	*		914.5	111.6	-	-	99.17	28.95	14.61	31.13	102	72	P	V
														V
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>Non restricted band limit is radio frequency level down 20db</li> <li>The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.</li> </ol>													





LoRa	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
LoRa DTS 500KHz CH 31 926.5MHz		30	32.06	-7.94	40	29.32	24.27	10.83	32.36	-	-	P	H	
		120.21	27.18	-16.32	43.5	30.69	17.34	11.56	32.41	-	-	P	H	
		262.8	28.6	-17.4	46	28.84	19.59	12.42	32.25	-	-	P	H	
		403.45	33.44	-12.56	46	30.36	21.83	12.97	31.72	-	-	P	H	
		482.99	35.16	-10.84	46	30.43	23.57	13.23	32.07	-	-	P	H	
		562.53	38.38	-7.62	46	31.46	25.95	13.57	32.6	-	-	P	H	
	*	926.5	120.89	-	-	108.04	29.25	14.65	31.05	100	149	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
			30	32.56	-7.44	40	29.82	24.27	10.83	32.36	-	-	P	V
			97.9	26.89	-16.61	43.5	32.48	15.41	11.38	32.38	-	-	P	V
			134.76	26.62	-16.88	43.5	29.99	17.35	11.71	32.43	-	-	P	V
			259.89	28.82	-17.18	46	29.12	19.55	12.41	32.26	-	-	P	V
			424.79	33.79	-12.21	46	29.92	22.64	13.04	31.81	-	-	P	V
			583.87	36.97	-9.03	46	30.59	25.51	13.63	32.76	-	-	P	V
	*		926.5	111.39	-	-	98.54	29.25	14.65	31.05	103	72	P	V
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>Non restricted band limit is radio frequency level down 20db</li> <li>The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.</li> </ol>													



**LoRa DTS 500KHz (Harmonic @ 3m)**

LoRa	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
LoRa DTS 500KHz CH 01 902.5MHz		2707.5	45.86	-28.14	74	42.9	28.23	8.63	33.9	-	-	P	H	
		3610	39.85	-34.15	74	58.26	29.72	10.78	58.91	-	-	P	H	
		4512.5	39.98	-34.02	74	54.92	31.7	11.08	57.72	-	-	P	H	
		5415	40.83	-33.17	74	54.16	32.9	12.08	58.31	-	-	P	H	
		8122.5	47.61	-26.39	74	54.55	37.1	14.37	58.41	-	-	P	H	
		9025	47.57	-26.43	74	51.93	38.05	15.83	58.24	-	-	P	H	
														H
			2707.5	45.19	-28.81	74	42.23	28.23	8.63	33.9	-	-	P	V
			3610	39.56	-34.44	74	57.97	29.72	10.78	58.91	-	-	P	V
			4512.5	39.53	-34.47	74	54.47	31.7	11.08	57.72	-	-	P	V
			5415	39.66	-34.34	74	52.99	32.9	12.08	58.31	-	-	P	V
			8122.5	43.34	-30.66	74	50.28	37.1	14.37	58.41	-	-	P	V
			9025	46.84	-27.16	74	51.2	38.05	15.83	58.24	-	-	P	V
														V



LoRa DTS 500KHz CH 16 914.5MHz		2743.5	46.31	-27.69	74	43.15	28.37	8.69	33.9	-	-	P	H	
		3658	38.58	-35.42	74	56.71	29.82	10.85	58.8	-	-	P	H	
		4572.5	39.4	-34.6	74	54.71	31.7	10.76	57.77	-	-	P	H	
		7316	43.54	-30.46	74	51.8	37.04	13.43	58.73	-	-	P	H	
		8230.5	43.49	-30.51	74	50.22	37.22	14.4	58.35	-	-	P	H	
		9145	45.32	-28.68	74	49.72	38.18	15.83	58.41	-	-	P	H	
														H
		2743.5	46.06	-27.94	74	42.9	28.37	8.69	33.9	-	-	P	V	
		3658	38.3	-35.7	74	56.43	29.82	10.85	58.8	-	-	P	V	
		4572.5	38.97	-35.03	74	54.28	31.7	10.76	57.77	-	-	P	V	
		7316	41.96	-32.04	74	50.22	37.04	13.43	58.73	-	-	P	V	
		8230.5	43.34	-30.66	74	50.07	37.22	14.4	58.35	-	-	P	V	
		9145	45.54	-28.46	74	49.94	38.18	15.83	58.41	-	-	P	V	
													V	
LoRa DTS 500KHz CH 31 926.5MHz		2779.5	45.63	-28.37	74	42.31	28.46	8.75	33.89	-	-	P	H	
		3706	38.94	-35.06	74	56.77	29.94	10.91	58.68	-	-	P	H	
		4632.5	38.82	-35.18	74	54.13	31.76	10.74	57.81	-	-	P	H	
		7412	42.43	-31.57	74	50.87	36.55	13.72	58.71	-	-	P	H	
		8338.5	44.07	-29.93	74	50.47	37.28	14.61	58.29	-	-	P	H	
														H
														H
		2779.5	45.22	-28.78	74	41.9	28.46	8.75	33.89	-	-	P	V	
		3706	38.92	-35.08	74	56.75	29.94	10.91	58.68	-	-	P	V	
		4632.5	40.94	-33.06	74	56.25	31.76	10.74	57.81	-	-	P	V	
		7412	43.29	-30.71	74	51.73	36.55	13.72	58.71	-	-	P	V	
		8338.5	43.38	-30.62	74	49.78	37.28	14.61	58.29	-	-	P	V	
														V
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>1. No other spurious found.</li> <li>2. All results are PASS against Peak and Average limit line.</li> <li>3. Non restricted band limit is radio frequency level down 20db</li> <li>4. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



LoRa 902~928MHz

LoRa DTS 500KHz\_SF8 (Band Edge @ 3m)

LoRa	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
LoRa DTS 500KHz CH 01 902.5MHz		30	33.71	-6.29	40	30.97	24.27	10.83	32.36	-	-	P	H	
		140.58	26.15	-17.35	43.5	29.67	17.18	11.74	32.44	-	-	P	H	
		259.89	29.11	-16.89	46	29.41	19.55	12.41	32.26	-	-	P	H	
		371.44	31.5	-14.5	46	29.83	20.64	12.84	31.81	-	-	P	H	
		496.57	34.85	-11.15	46	29.91	23.78	13.28	32.12	-	-	P	H	
		559.62	36.6	-9.4	46	29.66	25.95	13.57	32.58	-	-	P	H	
	*	902.5	120.98	-	-	108.75	28.85	14.59	31.21	100	146	P	H	
													H	
													H	
													H	
													H	
			30	33.52	-6.48	40	30.78	24.27	10.83	32.36	-	-	P	V
			97.9	27.03	-16.47	43.5	32.62	15.41	11.38	32.38	-	-	P	V
			130.88	27.12	-16.38	43.5	30.41	17.46	11.68	32.43	-	-	P	V
			413.15	34.02	-11.98	46	30.6	22.17	13.01	31.76	-	-	P	V
			486.87	35.44	-10.56	46	30.64	23.64	13.24	32.08	-	-	P	V
			553.8	36.49	-9.51	46	29.96	25.52	13.55	32.54	-	-	P	V
	*		902.5	111.63	-	-	99.4	28.85	14.59	31.21	102	72	P	V
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>Non restricted band limit is radio frequency level down 20db</li> <li>The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.</li> </ol>													



LoRa	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
LoRa DTS 500KHz CH 16 914.5MHz		30	31.83	-8.17	40	29.09	24.27	10.83	32.36	-	-	P	H	
		132.82	26.65	-16.85	43.5	30.02	17.37	11.69	32.43	-	-	P	H	
		259.89	28.97	-17.03	46	29.27	19.55	12.41	32.26	-	-	P	H	
		311.3	29.28	-16.72	46	29.44	19.24	12.64	32.04	-	-	P	H	
		404.42	33.56	-12.44	46	30.43	21.87	12.98	31.72	-	-	P	H	
		554.77	36.87	-9.13	46	30.23	25.64	13.55	32.55	-	-	P	H	
	*	914.5	121.05	-	-	108.62	28.95	14.61	31.13	100	149	P	H	
													H	
													H	
													H	
													H	
													H	
			30	32.27	-7.73	40	29.53	24.27	10.83	32.36	-	-	P	V
			97.9	26.66	-16.84	43.5	32.25	15.41	11.38	32.38	-	-	P	V
			143.49	26.2	-17.3	43.5	29.76	17.13	11.76	32.45	-	-	P	V
			262.8	28.91	-17.09	46	29.15	19.59	12.42	32.25	-	-	P	V
			462.62	35.23	-10.77	46	30.85	23.2	13.16	31.98	-	-	P	V
			561.56	36.28	-9.72	46	29.35	25.96	13.57	32.6	-	-	P	V
	*		914.5	111.4	-	-	98.97	28.95	14.61	31.13	102	72	P	V
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>Non restricted band limit is radio frequency level down 20db</li> <li>The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.</li> </ol>													



LoRa	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
LoRa DTS 500KHz CH 31 926.5MHz		30	32.44	-7.56	40	29.7	24.27	10.83	32.36	-	-	P	H	
		140.58	26.9	-16.6	43.5	30.42	17.18	11.74	32.44	-	-	P	H	
		265.71	29.52	-16.48	46	29.81	19.51	12.43	32.23	-	-	P	H	
		347.19	30.95	-15.05	46	29.91	20.19	12.75	31.9	-	-	P	H	
		450.98	34.66	-11.34	46	30.5	22.97	13.11	31.92	-	-	P	H	
		563.5	36.96	-9.04	46	30.05	25.94	13.58	32.61	-	-	P	H	
	*	926.5	120.73	-	-	107.88	29.25	14.65	31.05	100	150	P	H	
														H
														H
														H
														H
														H
			30	33.94	-6.06	40	31.2	24.27	10.83	32.36	-	-	P	V
			97.9	26.45	-17.05	43.5	32.04	15.41	11.38	32.38	-	-	P	V
			133.79	26.66	-16.84	43.5	30.05	17.34	11.7	32.43	-	-	P	V
			261.83	29.1	-16.9	46	29.36	19.58	12.41	32.25	-	-	P	V
			427.7	34.02	-11.98	46	30.13	22.66	13.05	31.82	-	-	P	V
			568.35	37.09	-8.91	46	30.34	25.81	13.59	32.65	-	-	P	V
*		926.5	111.39	-	-	98.54	29.25	14.65	31.05	100	72	P	V	
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>Non restricted band limit is radio frequency level down 20db</li> <li>The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.</li> </ol>													



**LoRa DTS 500KHz (Harmonic @ 3m)**

LoRa	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
LoRa DTS 500KHz CH 01 902.5MHz		2707.5	46.54	-27.46	74	43.58	28.23	8.63	33.9	-	-	P	H	
		3610	38.88	-35.12	74	57.29	29.72	10.78	58.91	-	-	P	H	
		4512.5	39.38	-34.62	74	54.32	31.7	11.08	57.72	-	-	P	H	
		5415	40.39	-33.61	74	53.72	32.9	12.08	58.31	-	-	P	H	
		8122.5	47.03	-26.97	74	53.97	37.1	14.37	58.41	-	-	P	H	
		9025	46.25	-27.75	74	50.61	38.05	15.83	58.24	-	-	P	H	
														H
			2707.5	45.85	-28.15	74	42.89	28.23	8.63	33.9	-	-	P	V
			3610	38.95	-35.05	74	57.36	29.72	10.78	58.91	-	-	P	V
			4512.5	39.95	-34.05	74	54.89	31.7	11.08	57.72	-	-	P	V
			5415	39.81	-34.19	74	53.14	32.9	12.08	58.31	-	-	P	V
			8122.5	47.55	-26.45	74	54.49	37.1	14.37	58.41	-	-	P	V
			9025	46.94	-27.06	74	51.3	38.05	15.83	58.24	-	-	P	V
														V



LoRa DTS 500KHz CH 16 914.5MHz		2743.5	45.72	-28.28	74	42.56	28.37	8.69	33.9	-	-	P	H	
		3658	38.24	-35.76	74	56.37	29.82	10.85	58.8	-	-	P	H	
		4572.5	39.91	-34.09	74	55.22	31.7	10.76	57.77	-	-	P	H	
		7316	42.75	-31.25	74	51.01	37.04	13.43	58.73	-	-	P	H	
		8230.5	43.92	-30.08	74	50.65	37.22	14.4	58.35	-	-	P	H	
		9145	45.29	-28.71	74	49.69	38.18	15.83	58.41	-	-	P	H	
														H
		2743.5	45.97	-28.03	74	42.81	28.37	8.69	33.9	-	-	P	V	
		3658	39.52	-34.48	74	57.65	29.82	10.85	58.8	-	-	P	V	
		4572.5	40.13	-33.87	74	55.44	31.7	10.76	57.77	-	-	P	V	
		7316	43.12	-30.88	74	51.38	37.04	13.43	58.73	-	-	P	V	
		8230.5	43.68	-30.32	74	50.41	37.22	14.4	58.35	-	-	P	V	
		9145	45.79	-28.21	74	50.19	38.18	15.83	58.41	-	-	P	V	
													V	
LoRa DTS 500KHz CH 31 926.5MHz		2779.5	46.68	-27.32	74	43.36	28.46	8.75	33.89	-	-	P	H	
		3706	38.91	-35.09	74	56.74	29.94	10.91	58.68	-	-	P	H	
		4632.5	38.12	-35.88	74	53.43	31.76	10.74	57.81	-	-	P	H	
		7412	42.15	-31.85	74	50.59	36.55	13.72	58.71	-	-	P	H	
		8338.5	45.3	-28.7	74	51.7	37.28	14.61	58.29	-	-	P	H	
														H
														H
		2779.5	46.27	-27.73	74	42.95	28.46	8.75	33.89	-	-	P	V	
		3706	38.28	-35.72	74	56.11	29.94	10.91	58.68	-	-	P	V	
		4632.5	39.75	-34.25	74	55.06	31.76	10.74	57.81	-	-	P	V	
		7412	42.74	-31.26	74	51.18	36.55	13.72	58.71	-	-	P	V	
		8338.5	43.97	-30.03	74	50.37	37.28	14.61	58.29	-	-	P	V	
														V
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>1. No other spurious found.</li> <li>2. All results are PASS against Peak and Average limit line.</li> <li>3. Non restricted band limit is radio frequency level down 20db</li> <li>4. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													





LoRa 902~928MHz

LoRa DTS 500KHz\_SF9 (Band Edge @ 3m)

LoRa	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
LoRa DTS 500KHz CH 01 902.5MHz		30	33.17	-6.83	40	30.43	24.27	10.83	32.36	-	-	P	H	
		127	26.33	-17.17	43.5	29.74	17.4	11.61	32.42	-	-	P	H	
		265.71	29.37	-16.63	46	29.66	19.51	12.43	32.23	-	-	P	H	
		340.4	31.5	-14.5	46	30.74	19.96	12.73	31.93	-	-	P	H	
		435.46	35.14	-10.86	46	31.18	22.76	13.06	31.86	-	-	P	H	
		594.54	37.37	-8.63	46	31.18	25.37	13.66	32.84	-	-	P	H	
	*	902.5	121.03	-	-	108.8	28.85	14.59	31.21	100	148	P	H	
													H	
													H	
													H	
													H	
			30	31.69	-8.31	40	28.95	24.27	10.83	32.36	-	-	P	V
			97.9	26.68	-16.82	43.5	32.27	15.41	11.38	32.38	-	-	P	V
			147.37	26.83	-16.67	43.5	30.55	16.98	11.75	32.45	-	-	P	V
			289.96	29.45	-16.55	46	30.11	18.92	12.55	32.13	-	-	P	V
			438.37	34.04	-11.96	46	30.07	22.77	13.07	31.87	-	-	P	V
			559.62	37.13	-8.87	46	30.19	25.95	13.57	32.58	-	-	P	V
	*		902.5	111.48	-	-	99.25	28.85	14.59	31.21	102	73	P	V
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>Non restricted band limit is radio frequency level down 20db</li> <li>The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.</li> </ol>													



LoRa	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
LoRa DTS 500KHz CH 16 914.5MHz		30	31.97	-8.03	40	29.23	24.27	10.83	32.36	-	-	P	H	
		151.25	26.49	-17.01	43.5	30.32	16.86	11.77	32.46	-	-	P	H	
		264.74	29.11	-16.89	46	29.31	19.61	12.43	32.24	-	-	P	H	
		385.99	32.28	-13.72	46	29.97	21.15	12.91	31.75	-	-	P	H	
		511.12	35.02	-10.98	46	30.01	23.88	13.35	32.22	-	-	P	H	
		557.68	36.76	-9.24	46	29.94	25.83	13.56	32.57	-	-	P	H	
	*	914.5	120.85	-	-	108.42	28.95	14.61	31.13	100	147	P	H	
													H	
													H	
													H	
													H	
													H	
			30	33.89	-6.11	40	31.15	24.27	10.83	32.36	-	-	P	V
			97.9	26.19	-17.31	43.5	31.78	15.41	11.38	32.38	-	-	P	V
			131.85	26.03	-17.47	43.5	29.33	17.44	11.69	32.43	-	-	P	V
			261.83	29.15	-16.85	46	29.41	19.58	12.41	32.25	-	-	P	V
			419.94	33.2	-12.8	46	29.44	22.53	13.02	31.79	-	-	P	V
			563.5	37.16	-8.84	46	30.25	25.94	13.58	32.61	-	-	P	V
*		914.5	111.4	-	-	98.97	28.95	14.61	31.13	103	72	P	V	
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>Non restricted band limit is radio frequency level down 20db</li> <li>The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.</li> </ol>													



LoRa	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
LoRa DTS 500KHz CH 31 926.5MHz		30	33.12	-6.88	40	30.38	24.27	10.83	32.36	-	-	P	H	
		143.49	27.3	-16.2	43.5	30.86	17.13	11.76	32.45	-	-	P	H	
		263.77	28.9	-17.1	46	29.12	19.6	12.42	32.24	-	-	P	H	
		305.48	29.49	-16.51	46	29.81	19.12	12.62	32.06	-	-	P	H	
		457.77	34.79	-11.21	46	30.47	23.13	13.14	31.95	-	-	P	H	
		564.47	36.64	-9.36	46	29.75	25.93	13.58	32.62	-	-	P	H	
	*	926.5	120.65	-	-	107.8	29.25	14.65	31.05	100	148	P	H	
														H
														H
														H
														H
														H
														H
														H
			30	33.09	-6.91	40	30.35	24.27	10.83	32.36	-	-	P	V
			141.55	26.86	-16.64	43.5	30.38	17.17	11.75	32.44	-	-	P	V
			263.77	29.13	-16.87	46	29.35	19.6	12.42	32.24	-	-	P	V
		356.89	31.34	-14.66	46	29.95	20.46	12.79	31.86	-	-	P	V	
		431.58	33.72	-12.28	46	29.8	22.7	13.06	31.84	-	-	P	V	
		570.29	36.71	-9.29	46	30.04	25.74	13.59	32.66	-	-	P	V	
*		926.5	110.81	-	-	97.96	29.25	14.65	31.05	103	71	P	V	
													V	
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>Non restricted band limit is radio frequency level down 20db</li> <li>The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.</li> </ol>													



LoRa DTS 500KHz (Harmonic @ 3m)

LoRa	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
LoRa DTS 500KHz CH 01 902.5MHz		2707.5	46.07	-27.93	74	43.11	28.23	8.63	33.9	-	-	P	H	
		3610	38.02	-35.98	74	56.43	29.72	10.78	58.91	-	-	P	H	
		4512.5	39.44	-34.56	74	54.38	31.7	11.08	57.72	-	-	P	H	
		5415	39.17	-34.83	74	52.5	32.9	12.08	58.31	-	-	P	H	
		8122.5	45.93	-28.07	74	52.87	37.1	14.37	58.41	-	-	P	H	
		9025	45.1	-28.9	74	49.46	38.05	15.83	58.24	-	-	P	H	
														H
			2707.5	45.96	-28.04	74	43	28.23	8.63	33.9	-	-	P	V
			3610	38.25	-35.75	74	56.66	29.72	10.78	58.91	-	-	P	V
			4512.5	40.3	-33.7	74	55.24	31.7	11.08	57.72	-	-	P	V
			5415	39.57	-34.43	74	52.9	32.9	12.08	58.31	-	-	P	V
			8122.5	46.61	-27.39	74	53.55	37.1	14.37	58.41	-	-	P	V
			9025	46.96	-27.04	74	51.32	38.05	15.83	58.24	-	-	P	V
														V



LoRa DTS 500KHz CH 16 914.5MHz		2743.5	46.38	-27.62	74	43.22	28.37	8.69	33.9	-	-	P	H	
		3658	38.02	-35.98	74	56.15	29.82	10.85	58.8	-	-	P	H	
		4572.5	39.01	-34.99	74	54.32	31.7	10.76	57.77	-	-	P	H	
		7316	42.19	-31.81	74	50.45	37.04	13.43	58.73	-	-	P	H	
		8230.5	43.66	-30.34	74	50.39	37.22	14.4	58.35	-	-	P	H	
		9145	45.19	-28.81	74	49.59	38.18	15.83	58.41	-	-	P	H	
														H
		2743.5	46.03	-27.97	74	42.87	28.37	8.69	33.9	-	-	P	V	
		3658	38.3	-35.7	74	56.43	29.82	10.85	58.8	-	-	P	V	
		4572.5	38.59	-35.41	74	53.9	31.7	10.76	57.77	-	-	P	V	
		7316	43.23	-30.77	74	51.49	37.04	13.43	58.73	-	-	P	V	
		8230.5	42.71	-31.29	74	49.44	37.22	14.4	58.35	-	-	P	V	
		9145	44.87	-29.13	74	49.27	38.18	15.83	58.41	-	-	P	V	
													V	
LoRa DTS 500KHz CH 31 926.5MHz		2779.5	46.27	-27.73	74	42.95	28.46	8.75	33.89	-	-	P	H	
		3706	39.09	-34.91	74	56.92	29.94	10.91	58.68	-	-	P	H	
		4632.5	38.29	-35.71	74	53.6	31.76	10.74	57.81	-	-	P	H	
		7412	42.11	-31.89	74	50.55	36.55	13.72	58.71	-	-	P	H	
		8338.5	43.3	-30.7	74	49.7	37.28	14.61	58.29	-	-	P	H	
														H
														H
		2779.5	46.37	-27.63	74	43.05	28.46	8.75	33.89	-	-	P	V	
		3706	38.55	-35.45	74	56.38	29.94	10.91	58.68	-	-	P	V	
		4632.5	38.83	-35.17	74	54.14	31.76	10.74	57.81	-	-	P	V	
		7412	42.24	-31.76	74	50.68	36.55	13.72	58.71	-	-	P	V	
		8338.5	43.47	-30.53	74	49.87	37.28	14.61	58.29	-	-	P	V	
														V
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>1. No other spurious found.</li> <li>2. All results are PASS against Peak and Average limit line.</li> <li>3. Non restricted band limit is radio frequency level down 20db</li> <li>4. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



LoRa 902~928MHz

LoRa DTS 500KHz\_SF10 (Band Edge @ 3m)

LoRa	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
LoRa DTS 500KHz CH 01 902.5MHz		30	33	-7	40	30.26	24.27	10.83	32.36	-	-	P	H	
		121.18	26.31	-17.19	43.5	29.84	17.31	11.57	32.41	-	-	P	H	
		264.74	29.47	-16.53	46	29.67	19.61	12.43	32.24	-	-	P	H	
		422.85	34.02	-11.98	46	30.2	22.59	13.03	31.8	-	-	P	H	
		485.9	35.91	-10.09	46	31.12	23.63	13.24	32.08	-	-	P	H	
		582.9	36.86	-9.14	46	30.46	25.52	13.63	32.75	-	-	P	H	
	*	902.5	120.92	-	-	108.69	28.85	14.59	31.21	100	148	P	H	
													H	
													H	
													H	
													H	
			30	32.53	-7.47	40	29.79	24.27	10.83	32.36	-	-	P	V
			97.9	27.82	-15.68	43.5	33.41	15.41	11.38	32.38	-	-	P	V
			130.88	27.34	-16.16	43.5	30.63	17.46	11.68	32.43	-	-	P	V
			308.39	29.32	-16.68	46	29.56	19.18	12.63	32.05	-	-	P	V
			470.38	34.68	-11.32	46	30.15	23.36	13.18	32.01	-	-	P	V
			555.74	37.2	-8.8	46	30.49	25.71	13.55	32.55	-	-	P	V
	*		902.5	111.53	-	-	99.3	28.85	14.59	31.21	103	73	P	V
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>Non restricted band limit is radio frequency level down 20db</li> <li>The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.</li> </ol>													



LoRa	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
LoRa DTS 500KHz CH 16 914.5MHz		30	31.98	-8.02	40	29.24	24.27	10.83	32.36	-	-	P	H	
		137.67	26.25	-17.25	43.5	29.74	17.23	11.72	32.44	-	-	P	H	
		254.07	29.25	-16.75	46	30.44	18.72	12.38	32.29	-	-	P	H	
		361.74	31.04	-14.96	46	29.59	20.5	12.8	31.85	-	-	P	H	
		502.39	34.92	-11.08	46	29.94	23.84	13.3	32.16	-	-	P	H	
		611.03	36.68	-9.32	46	30.39	25.41	13.7	32.82	-	-	P	H	
	*	914.5	121.1	-	-	108.67	28.95	14.61	31.13	100	147	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
			30	32.88	-7.12	40	30.14	24.27	10.83	32.36	-	-	P	V
			149.31	26.62	-16.88	43.5	30.48	16.83	11.76	32.45	-	-	P	V
			265.71	29.42	-16.58	46	29.71	19.51	12.43	32.23	-	-	P	V
			372.41	31.21	-14.79	46	29.49	20.67	12.85	31.8	-	-	P	V
			490.75	35.26	-10.74	46	30.39	23.71	13.26	32.1	-	-	P	V
			567.38	36.61	-9.39	46	29.82	25.84	13.59	32.64	-	-	P	V
*		914.5	111.6	-	-	99.17	28.95	14.61	31.13	102	74	P	V	
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>Non restricted band limit is radio frequency level down 20db</li> <li>The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.</li> </ol>													







**LoRa DTS 500KHz (Harmonic @ 3m)**

LoRa	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
LoRa DTS 500KHz CH 01 902.5MHz		2707.5	45.7	-28.3	74	42.74	28.23	8.63	33.9	-	-	P	H	
		3610	39.13	-34.87	74	57.54	29.72	10.78	58.91	-	-	P	H	
		4512.5	39.43	-34.57	74	54.37	31.7	11.08	57.72	-	-	P	H	
		5415	38.87	-35.13	74	52.2	32.9	12.08	58.31	-	-	P	H	
		8122.5	46.04	-27.96	74	52.98	37.1	14.37	58.41	-	-	P	H	
		9025	45.66	-28.34	74	50.02	38.05	15.83	58.24	-	-	P	H	
														H
			2707.5	45.71	-28.29	74	42.75	28.23	8.63	33.9	-	-	P	V
			3610	37.31	-36.69	74	55.72	29.72	10.78	58.91	-	-	P	V
			4512.5	39.79	-34.21	74	54.73	31.7	11.08	57.72	-	-	P	V
			5415	40.19	-33.81	74	53.52	32.9	12.08	58.31	-	-	P	V
			8122.5	47	-27	74	53.94	37.1	14.37	58.41	-	-	P	V
			9025	46.16	-27.84	74	50.52	38.05	15.83	58.24	-	-	P	V
														V



LoRa DTS 500KHz CH 16 914.5MHz		2743.5	44.96	-29.04	74	41.8	28.37	8.69	33.9	-	-	P	H	
		3658	39.09	-34.91	74	57.22	29.82	10.85	58.8	-	-	P	H	
		4572.5	38.25	-35.75	74	53.56	31.7	10.76	57.77	-	-	P	H	
		7316	42.17	-31.83	74	50.43	37.04	13.43	58.73	-	-	P	H	
		8230.5	44.34	-29.66	74	51.07	37.22	14.4	58.35	-	-	P	H	
		9145	44.99	-29.01	74	49.39	38.18	15.83	58.41	-	-	P	H	
														H
		2743.5	45.6	-28.4	74	42.44	28.37	8.69	33.9	-	-	P	V	
		3658	38.05	-35.95	74	56.18	29.82	10.85	58.8	-	-	P	V	
		4572.5	38.62	-35.38	74	53.93	31.7	10.76	57.77	-	-	P	V	
		7316	43.11	-30.89	74	51.37	37.04	13.43	58.73	-	-	P	V	
		8230.5	44.38	-29.62	74	51.11	37.22	14.4	58.35	-	-	P	V	
		9145	45.52	-28.48	74	49.92	38.18	15.83	58.41	-	-	P	V	
													V	
LoRa DTS 500KHz CH 31 926.5MHz		2779.5	46	-28	74	42.68	28.46	8.75	33.89	-	-	P	H	
		3706	38.48	-35.52	74	56.31	29.94	10.91	58.68	-	-	P	H	
		4632.5	38.74	-35.26	74	54.05	31.76	10.74	57.81	-	-	P	H	
		7412	42.31	-31.69	74	50.75	36.55	13.72	58.71	-	-	P	H	
		8338.5	44.19	-29.81	74	50.59	37.28	14.61	58.29	-	-	P	H	
														H
														H
		2779.5	45.45	-28.55	74	42.13	28.46	8.75	33.89	-	-	P	V	
		3706	37.8	-36.2	74	55.63	29.94	10.91	58.68	-	-	P	V	
		4632.5	38.28	-35.72	74	53.59	31.76	10.74	57.81	-	-	P	V	
		7412	42.43	-31.57	74	50.87	36.55	13.72	58.71	-	-	P	V	
		8338.5	43.61	-30.39	74	50.01	37.28	14.61	58.29	-	-	P	V	
														V
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>Non restricted band limit is radio frequency level down 20db</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



LoRa 902~928MHz

LoRa DTS 500KHz\_SF11 (Band Edge @ 3m)

LoRa	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
LoRa DTS 500KHz CH 01 902.5MHz		30	33.02	-6.98	40	30.28	24.27	10.83	32.36	-	-	P	H	
		135.73	26.41	-17.09	43.5	29.81	17.32	11.71	32.43	-	-	P	H	
		261.83	29	-17	46	29.26	19.58	12.41	32.25	-	-	P	H	
		366.59	31.14	-14.86	46	29.62	20.53	12.82	31.83	-	-	P	H	
		495.6	35.19	-10.81	46	30.26	23.77	13.28	32.12	-	-	P	H	
		580.96	37.16	-8.84	46	30.74	25.54	13.62	32.74	-	-	P	H	
	*	902.5	121.07	-	-	108.84	28.85	14.59	31.21	100	147	P	H	
													H	
													H	
													H	
													H	
			30	33.51	-6.49	40	30.77	24.27	10.83	32.36	-	-	P	V
			141.55	26.71	-16.79	43.5	30.23	17.17	11.75	32.44	-	-	P	V
			258.92	29.68	-16.32	46	30.13	19.41	12.4	32.26	-	-	P	V
			395.69	32.69	-13.31	46	29.96	21.51	12.94	31.72	-	-	P	V
			503.36	34.7	-11.3	46	29.72	23.84	13.3	32.16	-	-	P	V
			557.68	38.24	-7.76	46	31.42	25.83	13.56	32.57	-	-	P	V
	*		902.5	111.6	-	-	99.37	28.85	14.59	31.21	102	71	P	V
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>Non restricted band limit is radio frequency level down 20db</li> <li>The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.</li> </ol>													



LoRa	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
LoRa DTS 500KHz CH 16 914.5MHz		30	31.5	-8.5	40	28.76	24.27	10.83	32.36	-	-	P	H	
		127	26.46	-17.04	43.5	29.87	17.4	11.61	32.42	-	-	P	H	
		273.47	29.02	-16.98	46	30.03	18.71	12.48	32.2	-	-	P	H	
		383.08	31.37	-14.63	46	29.2	21.03	12.9	31.76	-	-	P	H	
		473.29	34.09	-11.91	46	29.52	23.4	13.19	32.02	-	-	P	H	
		579.99	37.25	-8.75	46	30.81	25.55	13.62	32.73	-	-	P	H	
	*	914.5	121.13	-	-	108.7	28.95	14.61	31.13	100	149	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
			30	32.63	-7.37	40	29.89	24.27	10.83	32.36	-	-	P	V
			97.9	26.62	-16.88	43.5	32.21	15.41	11.38	32.38	-	-	P	V
			134.76	26.65	-16.85	43.5	30.02	17.35	11.71	32.43	-	-	P	V
			263.77	29.25	-16.75	46	29.47	19.6	12.42	32.24	-	-	P	V
			441.28	34.73	-11.27	46	30.73	22.8	13.08	31.88	-	-	P	V
			592.6	36.55	-9.45	46	30.31	25.42	13.65	32.83	-	-	P	V
	*		914.5	111.7	-	-	99.27	28.95	14.61	31.13	102	73	P	V
													V	
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>Non restricted band limit is radio frequency level down 20db</li> <li>The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.</li> </ol>													



LoRa	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
LoRa DTS 500KHz CH 31 926.5MHz		30	33.39	-6.61	40	30.65	24.27	10.83	32.36	-	-	P	H	
		133.79	26.54	-16.96	43.5	29.93	17.34	11.7	32.43	-	-	P	H	
		260.86	29.6	-16.4	46	29.87	19.58	12.41	32.26	-	-	P	H	
		394.72	32.75	-13.25	46	30.06	21.47	12.94	31.72	-	-	P	H	
		509.18	35.31	-10.69	46	30.3	23.88	13.34	32.21	-	-	P	H	
		560.59	36.97	-9.03	46	30.02	25.97	13.57	32.59	-	-	P	H	
	*	926.5	120.95	74.95	46	108.1	29.25	14.65	31.05	100	148	P	H	
														H
														H
														H
														H
														H
			30.97	33.27	-6.73	40	31.31	23.53	10.8	32.37	-	-	P	V
			97.9	27.36	-16.14	43.5	32.95	15.41	11.38	32.38	-	-	P	V
			124.09	26.68	-16.82	43.5	30.14	17.37	11.59	32.42	-	-	P	V
			267.65	29.04	-16.96	46	29.6	19.23	12.44	32.23	-	-	P	V
			402.48	33.79	-12.21	46	30.74	21.79	12.97	31.71	-	-	P	V
			580.96	36.84	-9.16	46	30.42	25.54	13.62	32.74	-	-	P	V
	*		926.5	111.53	65.53	46	98.68	29.25	14.65	31.05	103	73	P	V
														V
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>Non restricted band limit is radio frequency level down 20db</li> <li>The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.</li> </ol>													



LoRa DTS 500KHz (Harmonic @ 3m)

LoRa	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
LoRa DTS 500KHz CH 01 902.5MHz		2707.5	44.78	-29.22	74	41.82	28.23	8.63	33.9	-	-	P	H	
		3610	38.3	-35.7	74	56.71	29.72	10.78	58.91	-	-	P	H	
		4512.5	40.98	-33.02	74	55.92	31.7	11.08	57.72	-	-	P	H	
		5415	38.93	-35.07	74	52.26	32.9	12.08	58.31	-	-	P	H	
		8122.5	46.69	-27.31	74	53.63	37.1	14.37	58.41	-	-	P	H	
		9025	46.02	-27.98	74	50.38	38.05	15.83	58.24	-	-	P	H	
														H
			2707.5	44.73	-29.27	74	41.77	28.23	8.63	33.9	-	-	P	V
			3610	38.96	-35.04	74	57.37	29.72	10.78	58.91	-	-	P	V
			4512.5	39.57	-34.43	74	54.51	31.7	11.08	57.72	-	-	P	V
			5415	40.37	-33.63	74	53.7	32.9	12.08	58.31	-	-	P	V
			8122.5	47.42	-26.58	74	54.36	37.1	14.37	58.41	-	-	P	V
			9025	46.88	-27.12	74	51.24	38.05	15.83	58.24	-	-	P	V
														V



LoRa DTS 500KHz CH 16 914.5MHz		2743.5	44.86	-29.14	74	41.7	28.37	8.69	33.9	-	-	P	H	
		3658	38.38	-35.62	74	56.51	29.82	10.85	58.8	-	-	P	H	
		4572.5	38.67	-35.33	74	53.98	31.7	10.76	57.77	-	-	P	H	
		7316	42.76	-31.24	74	51.02	37.04	13.43	58.73	-	-	P	H	
		8230.5	43.86	-30.14	74	50.59	37.22	14.4	58.35	-	-	P	H	
		9145	45.81	-28.19	74	50.21	38.18	15.83	58.41	-	-	P	H	
														H
		2743.5	45.38	-28.62	74	42.22	28.37	8.69	33.9	-	-	P	V	
		3658	38.72	-35.28	74	56.85	29.82	10.85	58.8	-	-	P	V	
		4572.5	38.95	-35.05	74	54.26	31.7	10.76	57.77	-	-	P	V	
		7316	42.44	-31.56	74	50.7	37.04	13.43	58.73	-	-	P	V	
		8230.5	42.86	-31.14	74	49.59	37.22	14.4	58.35	-	-	P	V	
		9145	45.19	-28.81	74	49.59	38.18	15.83	58.41	-	-	P	V	
														V
LoRa DTS 500KHz CH 31 926.5MHz		2779.5	45.42	-28.58	74	42.1	28.46	8.75	33.89	-	-	P	H	
		3706	39.76	-34.24	74	57.59	29.94	10.91	58.68	-	-	P	H	
		4632.5	38.89	-35.11	74	54.2	31.76	10.74	57.81	-	-	P	H	
		7412	42.87	-31.13	74	51.31	36.55	13.72	58.71	-	-	P	H	
		8338.5	45.21	-28.79	74	51.61	37.28	14.61	58.29	-	-	P	H	
														H
														H
		2779.5	44.8	-29.2	74	41.48	28.46	8.75	33.89	-	-	P	V	
		3706	38.72	-35.28	74	56.55	29.94	10.91	58.68	-	-	P	V	
		4632.5	38.72	-35.28	74	54.03	31.76	10.74	57.81	-	-	P	V	
		7412	42.69	-31.31	74	51.13	36.55	13.72	58.71	-	-	P	V	
		8338.5	44.53	-29.47	74	50.93	37.28	14.61	58.29	-	-	P	V	
														V
														V
<b>Remark</b>	<ol style="list-style-type: none"> <li>1. No other spurious found.</li> <li>2. All results are PASS against Peak and Average limit line.</li> <li>3. Non restricted band limit is radio frequency level down 20db</li> <li>4. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>





A calculation example for radiated spurious emission is shown as below:

LoRa	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
LoRa DTS 500KHz CH 01 902.5MHz		2707.5	45.86	-28.14	74	42.9	28.23	8.63	33.9	-	-	P	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2707.5MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 28.23(dB/m) + 8.63(dB) + 42.9(dBμV) – 33.9 (dB)  
= 45.86 (dBμV/m)
2. Margin(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 45.86(dBμV/m) – 74(dBμV/m)  
= -28.14(dB)

**Peak measured complies with the limit line, so test result is “PASS”.**



## Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Yuan Lee and Troye Hsieh	Temperature :	20~21.5°C
		Relative Humidity :	56.4~67.6%

### LoRa 902~928MHz

### LoRa 500KHz DTS\_SF7 (Band Edge @ 3m)

LoRa	LoRa 902~928MHz	
	LoRa 500KHz DTS Ch01 902.5MHz	
	Horizontal	Vertical
QP / Peak	<p>Site : 03CH11-HY Condition : QP 3m BE-LO6 35414-211009 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition : QP 3m BE-LO6 35414-211009 VERTICAL</p>

**Remark:** The unwanted signal of mark #7.8.10 in Horizontal plot falls within the non-restricted band and meet the requirements of 15.247 (d).



LoRa	LoRa 902~928MHz	
	LoRa 500KHz DTS Ch16 914.5MHz	
	Horizontal	Vertical
QP / Peak	<p>Horizontal plot showing Level (dBm/1m) vs Frequency (MHz). The y-axis ranges from 10.0 to 140.0 dBm/1m. The x-axis ranges from 0 to 1000 MHz. A prominent peak is visible at 914.5 MHz, marked with a red 'QP' label. The plot includes a blue signal line and a red reference line. The date is 2022-08-30. Site: 03CH11-HY, Condition: QP 3m BE-LOS 35414-211009 HORIZONTAL.</p>	<p>Vertical plot showing Level (dBm/1m) vs Frequency (MHz). The y-axis ranges from 10.0 to 140.0 dBm/1m. The x-axis ranges from 0 to 1000 MHz. A prominent peak is visible at 914.5 MHz, marked with a red 'QP' label. The plot includes a blue signal line and a red reference line. The date is 2022-08-30. Site: 03CH11-HY, Condition: QP 3m BE-LOS 35414-211009 VERTICAL.</p>

**Remark:** The unwanted signal of mark #7.8.10 in Horizontal plot falls within the non-restricted band and meet the requirements of 15.247 (d).



LoRa	LoRa 902~928MHz	
	LoRa 500KHz DTS Ch31 926.5MHz	
	Horizontal	Vertical
QP / Peak	<p>Horizontal plot showing Level (dBm/1m) vs Frequency (MHz). The x-axis ranges from 50 to 1000 MHz, and the y-axis ranges from 0 to 140 dBm/1m. A prominent peak is observed at 926.5 MHz, marked with a red box and labeled 'QP'. The plot also shows a baseline level around 30-40 dBm/1m with several smaller peaks marked with numbers 1 through 6. The date is 2022-08-30.</p> <p>Site : 03CH11-HY Condition : QP 3m BE-LOS 35414-211009 HORIZONTAL</p>	<p>Vertical plot showing Level (dBm/1m) vs Frequency (MHz). The x-axis ranges from 50 to 1000 MHz, and the y-axis ranges from 0 to 140 dBm/1m. A prominent peak is observed at 926.5 MHz, marked with a red box and labeled 'QP'. The plot also shows a baseline level around 30-40 dBm/1m with several smaller peaks marked with numbers 1 through 6. The date is 2022-08-30.</p> <p>Site : 03CH11-HY Condition : QP 3m BE-LOS 35414-211009 VERTICAL</p>

**Remark:** The unwanted signal of mark #7.8.10 in Horizontal plot falls within the non-restricted band and meet the requirements of 15.247 (d).





LoRa 902~928MHz

LoRa 500KHz DTS\_SF8 (Band Edge @ 3m)

LoRa	LoRa 902~928MHz	
	LoRa 500KHz DTS Ch01 902.5MHz	
	Horizontal	Vertical
QP / Peak		

Remark: The unwanted signal of mark #7.8.10 in Horizontal plot falls within the non-restricted band and meet the requirements of 15.247 (d).

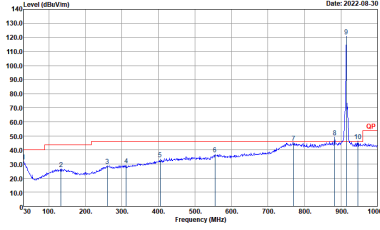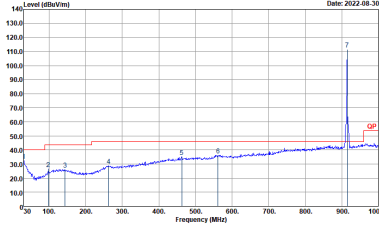

LoRa	LoRa 902~928MHz	
	LoRa 500KHz DTS Ch16 914.5MHz	
	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH11-HY Condition : QP 3m BE-LOS 35414-211009 HORIZONTAL</p>	 <p>Site : 03CH11-HY Condition : QP 3m BE-LOS 35414-211009 VERTICAL</p>

Remark: The unwanted signal of mark #7.8.10 in Horizontal plot falls within the non-restricted band and meet the requirements of 15.247 (d).



LoRa	LoRa 902~928MHz	
	LoRa 500KHz DTS Ch31 926.5MHz	
	Horizontal	Vertical
QP / Peak	<p>Horizontal plot showing Level (dBm/1m) vs Frequency (MHz). The y-axis ranges from 10.0 to 140.0 dBm/1m. The x-axis ranges from 50 to 1000 MHz. A prominent peak is observed at 926.5 MHz, marked with a red box and labeled 'QP'. The plot also shows a baseline signal level around 30-40 dBm/1m. The date is 2022.08.30.</p> <p>Site : 03CH11-HY Condition : QP 3m BE-LOS 35414-211009 HORIZONTAL</p>	<p>Vertical plot showing Level (dBm/1m) vs Frequency (MHz). The y-axis ranges from 10.0 to 140.0 dBm/1m. The x-axis ranges from 50 to 1000 MHz. A prominent peak is observed at 926.5 MHz, marked with a red box and labeled 'QP'. The plot also shows a baseline signal level around 30-40 dBm/1m. The date is 2022.08.30.</p> <p>Site : 03CH11-HY Condition : QP 3m BE-LOS 35414-211009 VERTICAL</p>

**Remark:** The unwanted signal of mark #7.8.10 in Horizontal plot falls within the non-restricted band and meet the requirements of 15.247 (d).