



FCC RF Test Report

APPLICANT : Ring LLC
EQUIPMENT : Spotlight Cam Pro
BRAND NAME : Ring
MODEL NAME : 5E62E9
FCC ID : 2AEUPBHASP001
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter
TEST DATE(S) : Jul. 27, 2022 ~ Aug. 05, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 5

 1.5 Modification of EUT 5

 1.6 Testing Location 6

 1.7 Test Software 6

 1.8 Applicable Standards..... 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7

 2.1 Carrier Frequency Channel 7

 2.2 Test Mode 9

 2.3 Connection Diagram of Test System 9

 2.4 EUT Operation Test Setup 10

 2.5 Measurement Results Explanation Example..... 10

3 TEST RESULT 11

 3.1 Output Power Measurement..... 11

 3.2 Conducted Band Edges Measurement..... 12

 3.3 Conducted Spurious Emission Measurement 15

 3.4 Radiated Band Edges and Spurious Emission Measurement 19

 3.5 Antenna Requirements 23

4 LIST OF MEASURING EQUIPMENT..... 24

5 UNCERTAINTY OF EVALUATION..... 25

APPENDIX A. RADIATED SPURIOUS EMISSION

APPENDIX B. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR1D0812-01E	Rev. 01	Initial issue of report	Oct. 12, 2022



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(b)(2)	Peak Output Power	15.247(b)(2)	Pass	-
3.2	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
3.3	15.247(d)	Conducted Spurious Emission	≤ 20dBc	Pass	-
3.4	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 10.70 dB at 960.23 MHz
3.5	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Note:

This is a variant report for 5E62E9. The change note could be referred to 5E62E9_Operational Description of Product Equality Declaration which is exhibit separately. Based on the similarity between current and previous project, only the related test cases of Conducted Power/Band Edge/RSE from original test report (Sporton Report Number FR1D0812E) were verified for the difference.

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Ring LLC
12515 Cerise Ave, Hawthorne, CA 90250 USA

1.2 Manufacturer

Goertek Inc.
No.268 Dongfang Road High-Tech Industrial Development District, Weifang Shandong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Spotlight Cam Pro
Brand Name	Ring
Model Name	5E62E9
FCC ID	2AEUPBHASP001
HW Version	DVT2
SW Version	1.5.17
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	902 MHz ~ 928 MHz
Number of Channels / Data Rate	129 chs for 50kbps 64 chs for 150kbps 51 chs for 250kbps
Maximum Output Power to Antenna	Data Rate 250kbps : 21.54 dBm (0.1426 W)
Antenna Type / Gain	PIFA Antenna with gain 0.95 dBi
Type of Modulation	FSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH06-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24al

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
902-928 MHz (50Kbps)	1	902.2	44	910.8	87	919.4
	2	902.4	45	911	88	919.6
	3	902.6	46	911.2	89	919.8
	4	902.8	47	911.4	90	920
	5	903	48	911.6	91	920.2
	6	903.2	49	911.8	92	920.4
	7	903.4	50	912	93	920.6
	8	903.6	51	912.2	94	920.8
	9	903.8	52	912.4	95	921
	10	904	53	912.6	96	921.2
	11	904.2	54	912.8	97	921.4
	12	904.4	55	913	98	921.6
	13	904.6	56	913.2	99	921.8
	14	904.8	57	913.4	100	922
	15	905	58	913.6	101	922.2
	16	905.2	59	913.8	102	922.4
	17	905.4	60	914	103	922.6
	18	905.6	61	914.2	104	922.8
	19	905.8	62	914.4	105	923
	20	906	63	914.6	106	923.2
	21	906.2	64	914.8	107	923.4
	22	906.4	65	915	108	923.6
	23	906.6	66	915.2	109	923.8
	24	906.8	67	915.4	110	924
	25	907	68	915.6	111	924.2
	26	907.2	69	915.8	112	924.4
	27	907.4	70	916	113	924.6
	28	907.6	71	916.2	114	924.8
	29	907.8	72	916.4	115	925
	30	908	73	916.6	116	925.2
	31	908.2	74	916.8	117	925.4
	32	908.4	75	917	118	925.6
	33	908.6	76	917.2	119	925.8
	34	908.8	77	917.4	120	926
	35	909	78	917.6	121	926.2
	36	909.2	79	917.8	122	926.4
	37	909.4	80	918	123	926.6
	38	909.6	81	918.2	124	926.8
	39	909.8	82	918.4	125	927
	40	910	83	918.6	126	927.2
	41	910.2	84	918.8	127	927.4
	42	910.4	85	919	128	927.6
	43	910.6	86	919.2	129	927.8

Note: The above EUT's information was declared by manufacturer.



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
902-928 MHz (150Kbps)	1	902.4	23	911.2	45	920
	2	902.8	24	911.6	46	920.4
	3	903.2	25	912	47	920.8
	4	903.6	26	912.4	48	921.2
	5	904	27	912.8	49	921.6
	6	904.4	28	913.2	50	922
	7	904.8	29	913.6	51	922.4
	8	905.2	30	914	52	922.8
	9	905.6	31	914.4	53	923.2
	10	906	32	914.8	54	923.6
	11	906.4	33	915.2	55	924
	12	906.8	34	915.6	56	924.4
	13	907.2	35	916	57	924.8
	14	907.6	36	916.4	58	925.2
	15	908	37	916.8	59	925.6
	16	908.4	38	917.2	60	926
	17	908.8	39	917.6	61	926.4
	18	909.2	40	918	62	926.8
	19	909.6	41	918.4	63	927.2
	20	910	42	918.8	64	927.6
	21	910.4	43	919.2		
	22	910.8	44	919.6		

Note: The above EUT's information was declared by manufacturer.

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
902-928 MHz (250Kbps)	1	902.5	18	911.0	35	919.5
	2	903.0	19	911.5	36	920.0
	3	903.5	20	912.0	37	920.5
	4	904.0	21	912.5	38	921.0
	5	904.5	22	913.0	39	921.5
	6	905.0	23	913.5	40	922.0
	7	905.5	24	914.0	41	922.5
	8	906.0	25	914.5	42	923.0
	9	906.5	26	915.0	43	923.5
	10	907.0	27	915.5	44	924.0
	11	907.5	28	916.0	45	924.5
	12	908.0	29	916.5	46	925.0
	13	908.5	30	917.0	47	925.5
	14	909.0	31	917.5	48	926.0
	15	909.5	32	918.0	49	926.5
	16	910.0	33	918.5	50	927.0
	17	910.5	34	919.0	51	927.5

Note: The above EUT's information was declared by manufacturer.



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower) For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report,

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases			
Test Item	Modulation / Data Rate		
	FSK FHSS / 50kbps	FSK FHSS / 150kbps	FSK FHSS / 250kbps
Conducted Test Cases	-	-	Low: 902.5 MHz Mid: 915 MHz High: 927.5 MHz
Radiated Test Cases	-	High: 927.6 MHz	-

2.3 Connection Diagram of Test System

For Radiated Emission:

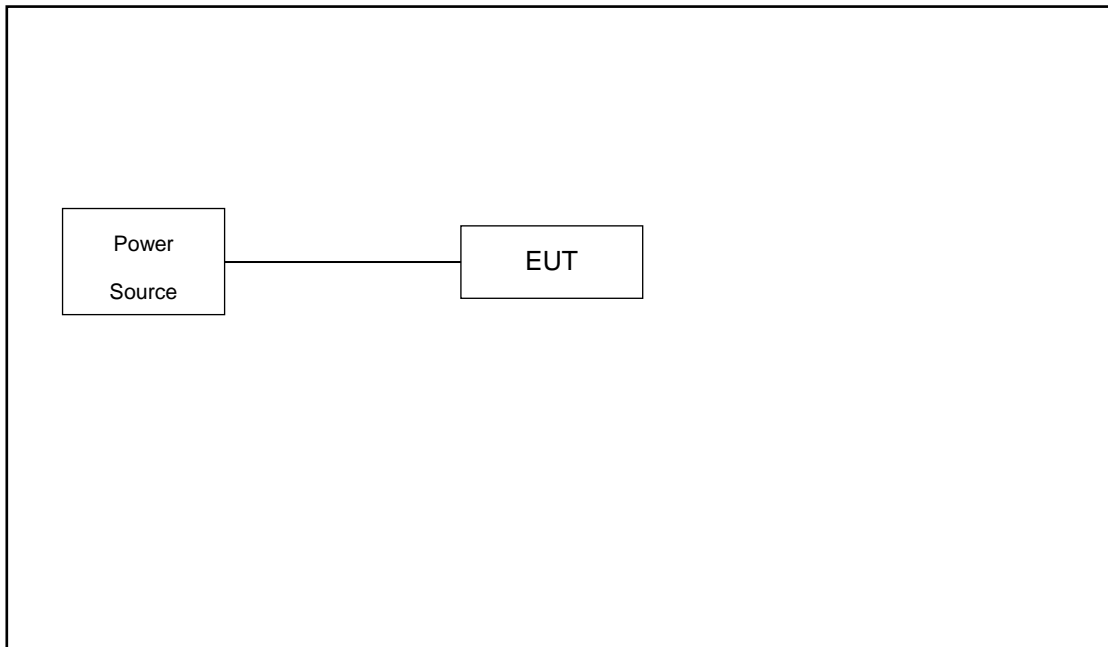



2.4 EUT Operation Test Setup

For FSK FHSS function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.0 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.0 + 10 = 15.0 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following: For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
1. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power with cable loss and record the results in the test report.
4. Measure and record the results in the test report.

3.1.4 Test Setup

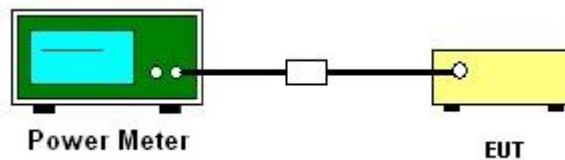

3.1.5 Test Result of Peak Output Power

mode	Freq. (MHz)	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
FSK250	902.5	1	21.35	30.00	Pass
	915	1	21.44	30.00	Pass
	927.5	1	21.54	30.00	Pass

3.2 Conducted Band Edges Measurement

3.2.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.2.4 Test Setup

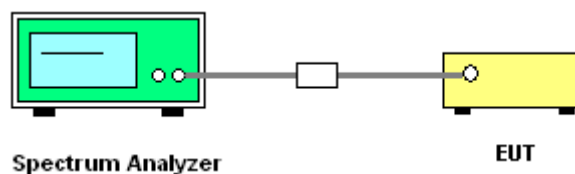





3.2.5 Test Result of Conducted Band Edges

<Data Rate 250kbps>

Low Band Edge Plot

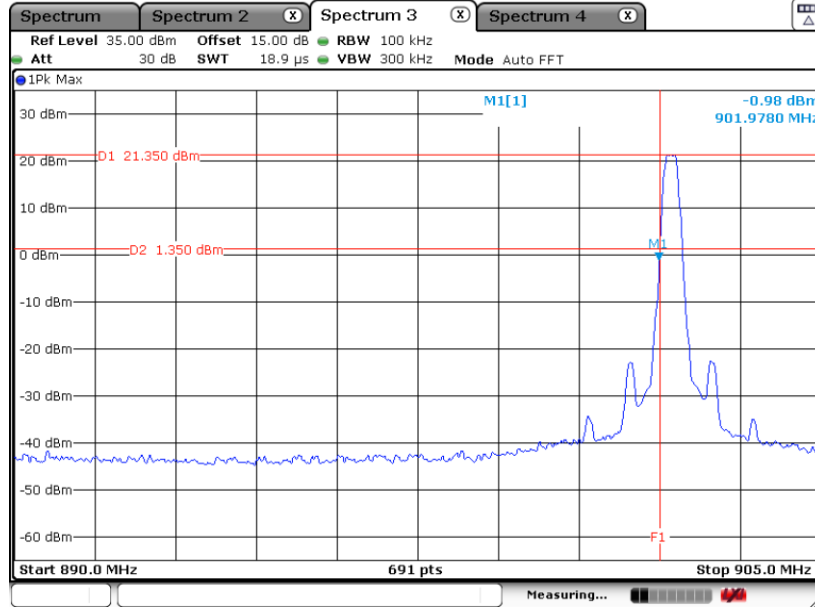

High Band Edge Plot

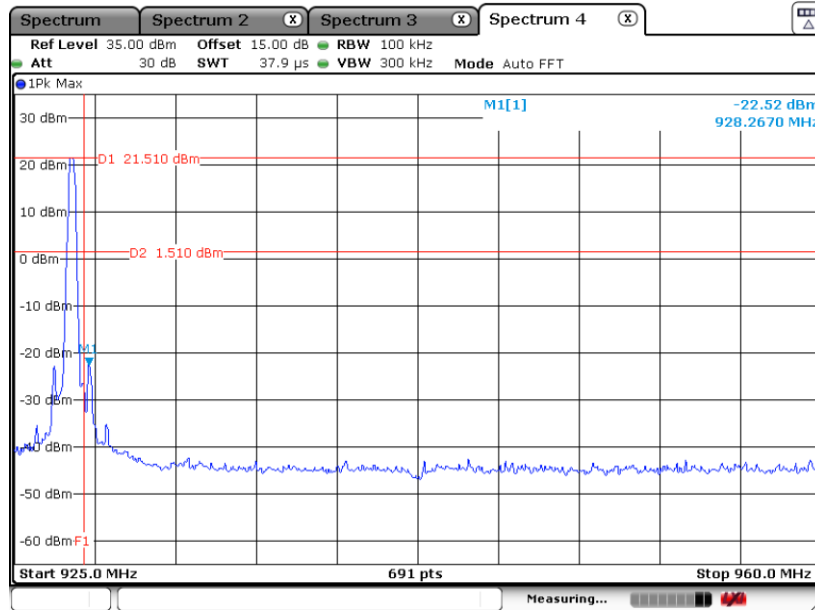




3.2.6 Test Result of Conducted Hopping Mode Band Edges


<Data Rate 250kbps>

Hopping Mode Low Band Edge Plot

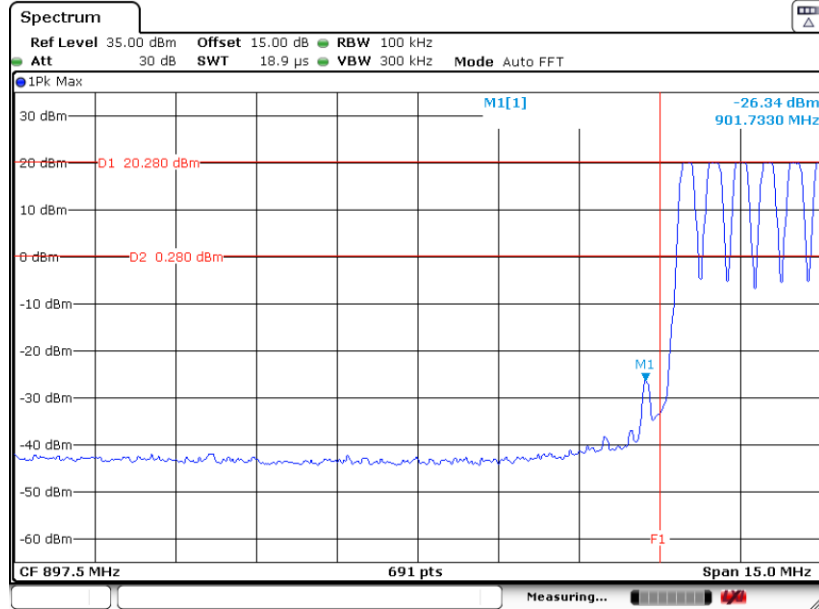

Date: 5.AUG.2022 09:34:06

Hopping Mode High Band Edge Plot

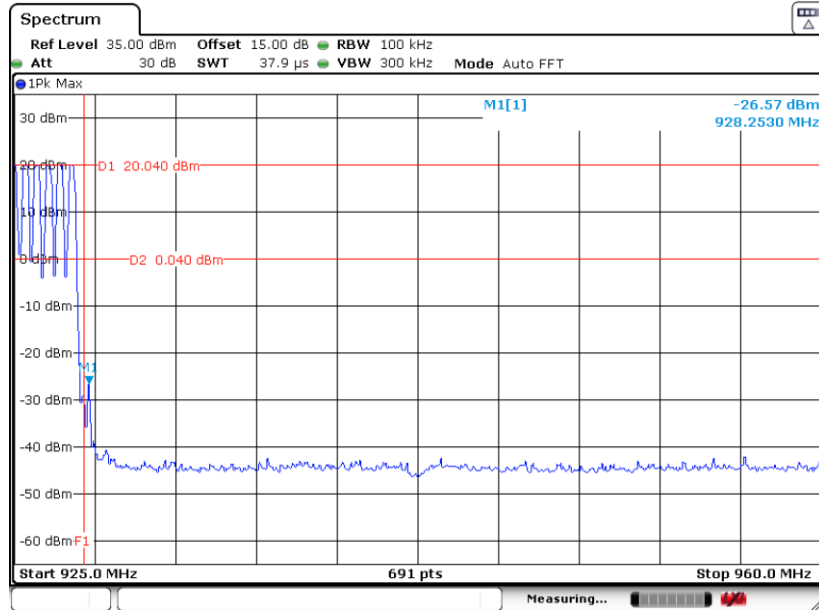

Date: 5.AUG.2022 09:15:35

3.3 Conducted Spurious Emission Measurement

3.3.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.3.4 Test Setup

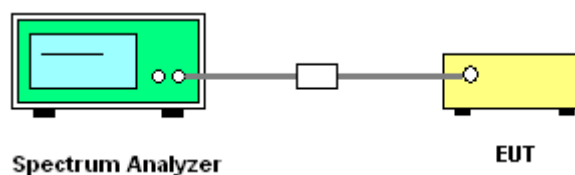





3.3.5 Test Result of Conducted Spurious Emission

<Data Rate 250kbps>

Low CH CSE Plot between 30MHz ~ 1 GHz

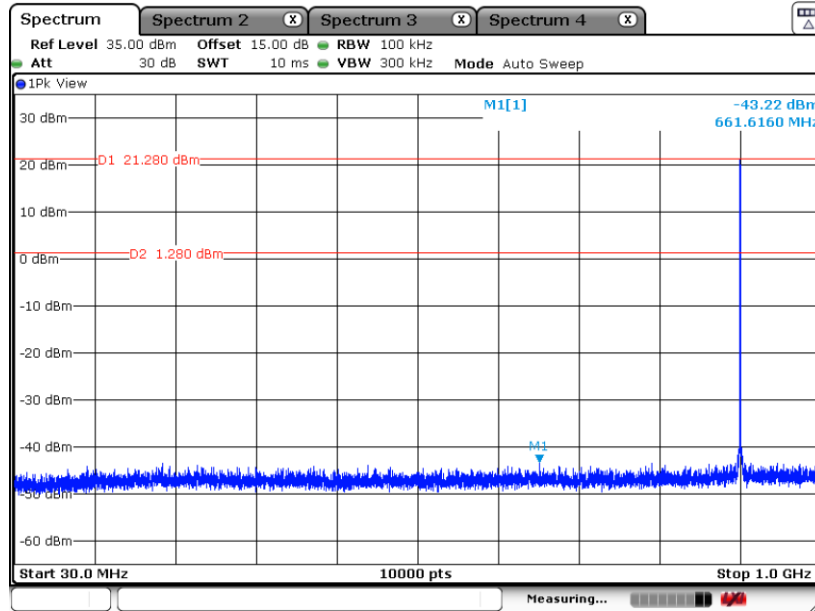


Low CH CSE Plot between 800 MHz ~ 10 GHz

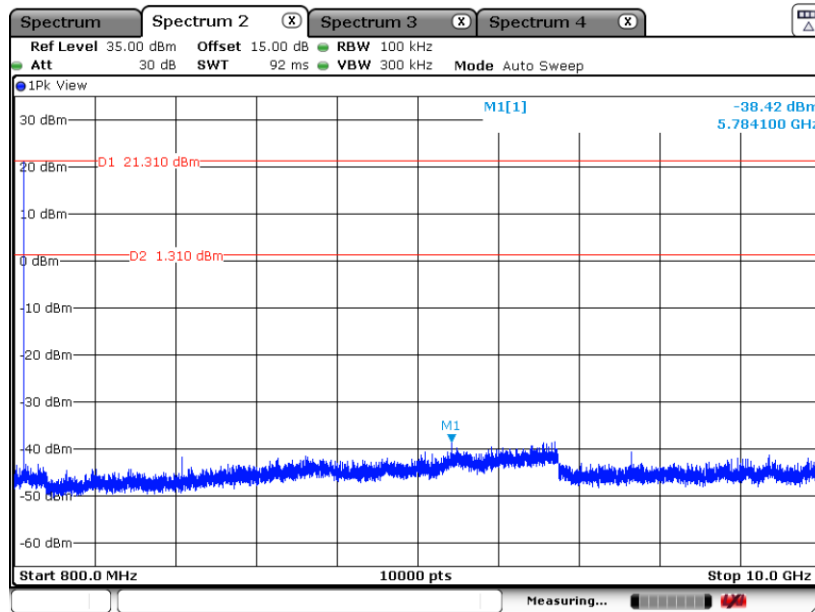




Mid CH CSE Plot between 30MHz ~ 1 GHz

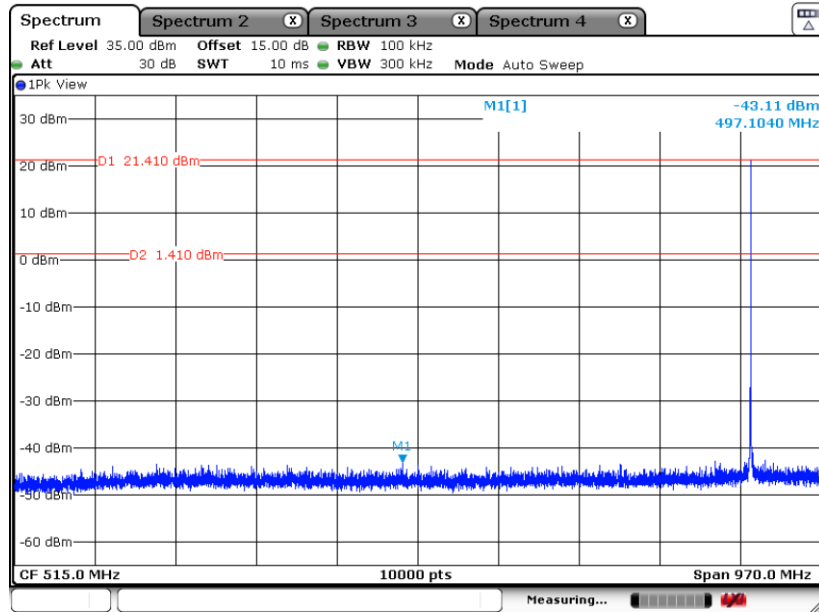

Date: 4.AUG.2022 19:11:47


Mid CH CSE Plot between 800 MHz ~ 10 GHz

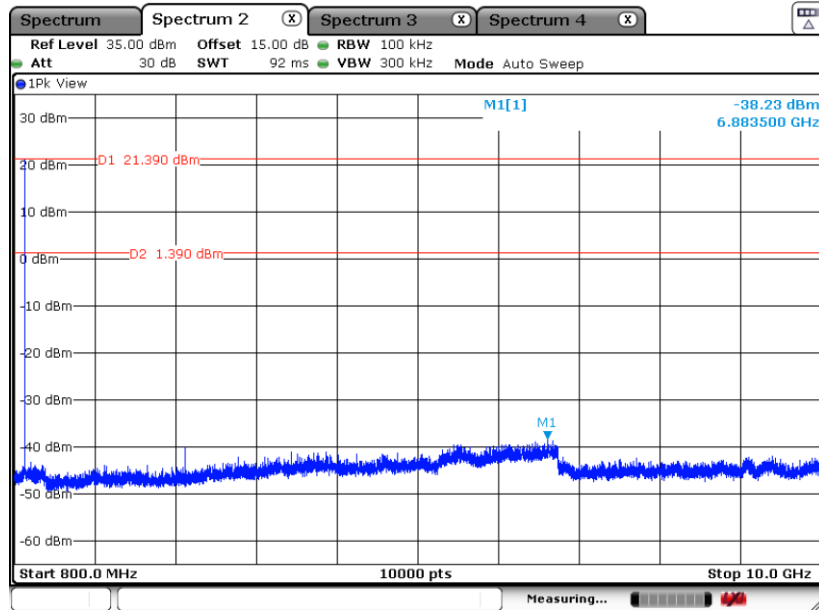


Date: 4.AUG.2022 19:12:33



High CH CSE Plot between 30MHz ~ 1 GHz

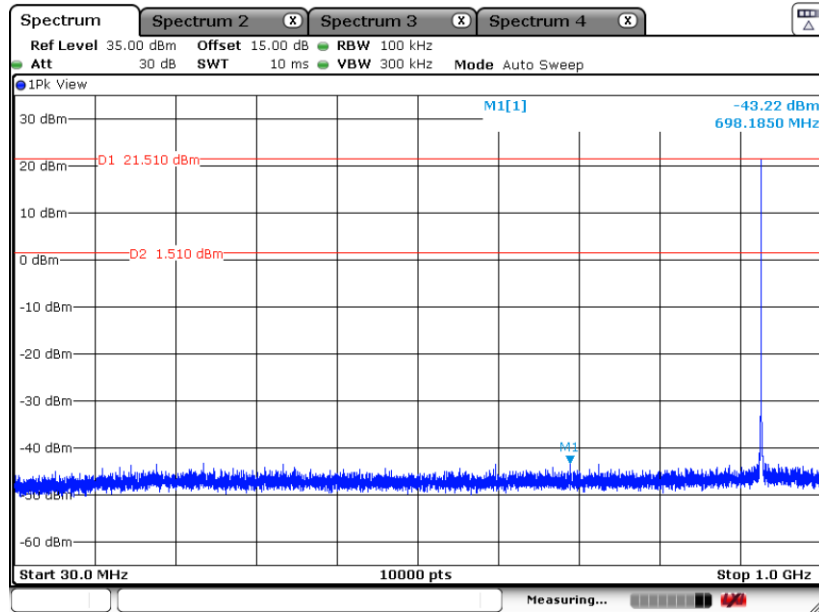

High CH CSE Plot between 800 MHz ~ 10 GHz

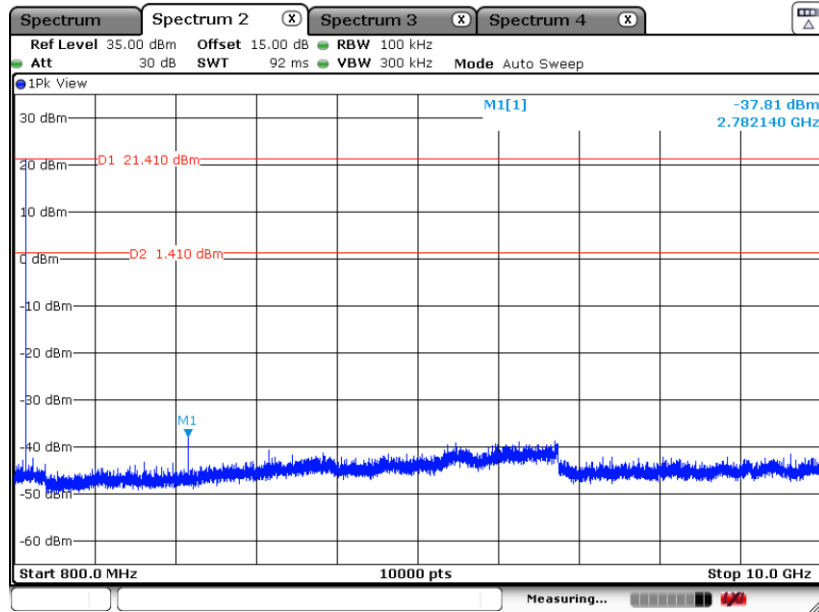



3.4 Radiated Band Edges and Spurious Emission Measurement

3.4.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

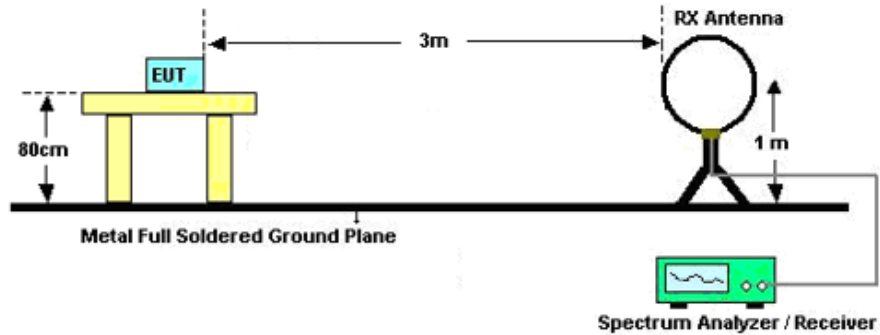

For radiated emissions from 30MHz to 1GHz

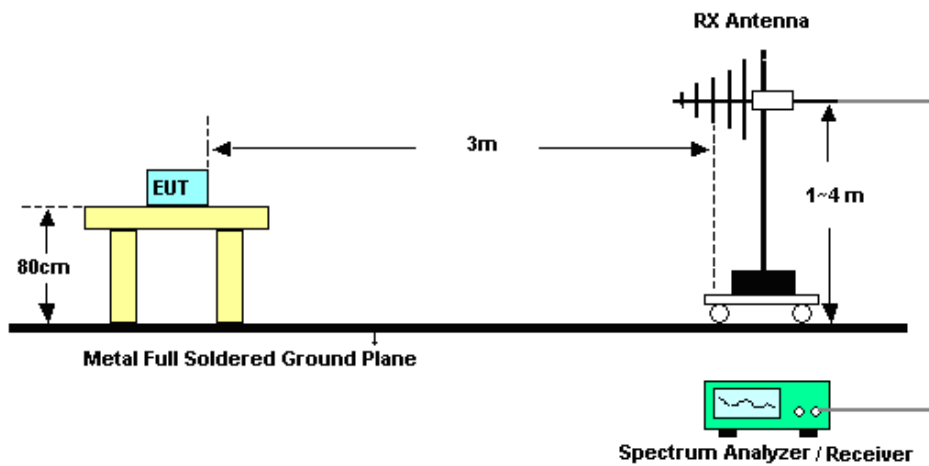

For radiated emissions above 1GHz

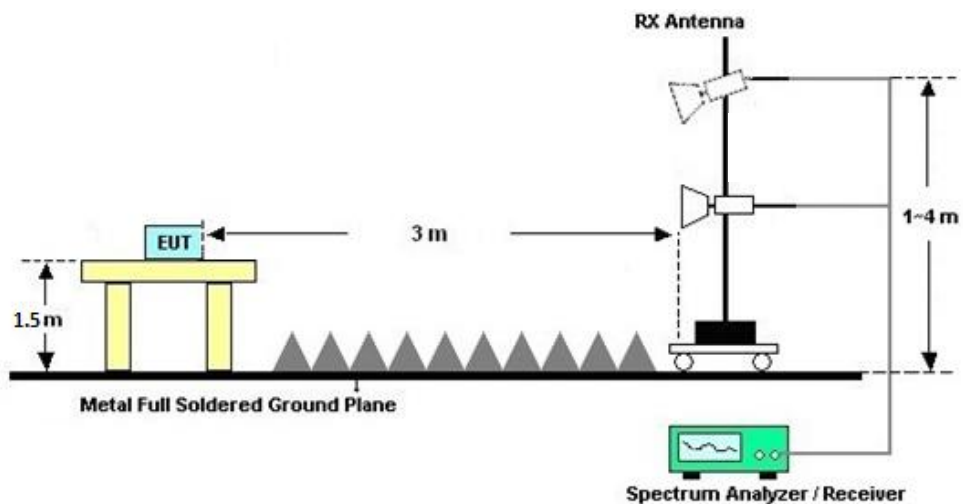



3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.4.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.



3.5 Antenna Requirements

3.5.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.5.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.5.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Aug. 04, 2022~ Aug. 05, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Aug. 04, 2022~ Aug. 05, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Aug. 04, 2022~ Aug. 05, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 16, 2021	Jul. 27, 2022~ Jul. 28, 2022	Oct. 15, 2022	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz-44GHz	Oct. 26, 2021	Jul. 27, 2022~ Jul. 28, 2022	Oct. 25, 2022	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Jul. 27, 2022~ Jul. 28, 2022	Oct. 29, 2022	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz-1GHz	May 24, 2022	Jul. 27, 2022~ Jul. 28, 2022	May 23, 2023	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Jul. 18, 2022	Jul. 27, 2022~ Jul. 28, 2022	Jul. 17, 2023	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 30, 2021	Jul. 27, 2022~ Jul. 28, 2022	Jul. 29, 2022	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Jul. 27, 2022~ Jul. 28, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 14, 2021	Jul. 27, 2022~ Jul. 28, 2022	Oct. 13, 2022	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 27, 2022~ Jul. 28, 2022	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 27, 2022~ Jul. 28, 2022	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 27, 2022~ Jul. 28, 2022	NCR	Radiation (03CH06-KS)

NCR: No Calibration Required.



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.56 dB
Conducted Emissions	±0.92 dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

Appendix A. Radiated Spurious Emission

902~928MHz

FSK 150K (Band Edge @ 3m)

	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
927.6MHz		927.25	116.8	-	-	116.42	26.97	4.1	30.69	100	360	P	H
		960.23	43.28	-10.72	54	42.18	27.27	4.18	30.35	100	360	P	H
		927.25	115.16	-	-	114.08	27.67	4.1	30.69	100	0	P	V
		960.23	43.3	-10.7	54	41.47	28	4.18	30.35	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. Non-restricted band limit is 100kHz-PSD down 20dB.												

FSK 150K (Harmonic @ 3m)

	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
927.6MHz		1855	42.51	-54.29	96.8	67.82	30.3	5.79	61.4	300	0	P	H
		2782	39.19	-34.81	74	61.32	32.13	7.16	61.42	300	0	P	H
		1855	41	-54.16	95.16	66.31	30.3	5.79	61.4	100	0	P	V
		2782	38.25	-35.75	74	60.38	32.13	7.16	61.42	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. Non-restricted band limit is 100kHz-PSD down 20dB.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
2402MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.