



<b>Prüfbericht-Nr.:</b> <i>Test report No.:</i>	50316655 001	<b>Auftrags-Nr.:</b> <i>Order No.:</i>	168141103	<b>Seite 1 von 36</b> <i>Page 1 of 36</i>	
<b>Kunden-Referenz-Nr.:</b> <i>Client reference No.:</i>	N/A	<b>Auftragsdatum:</b> <i>Order date.:</i>	20.11.2019		
<b>Auftraggeber:</b> <i>Client:</i>	<b>Ring LLC</b> 1523 26th Street, Santa Monica, California 90404, United States				
<b>Prüfgegenstand:</b> <i>Test item:</i>	Solar Pathlight				
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type No.:</i>	5AT1S6 (Trademark: Ring)				
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	FCC and IC approval				
<b>Prüfgrundlage:</b> <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 CFR47 FCC Part 15: Subpart B Section 15.107 CFR47 FCC Part 15: Subpart B Section 15.109 CFR47 FCC Part 2: Section 2.1091				
<b>Wareneingangsdatum:</b> <i>Date of receipt:</i>	20.11.2019	Please refer to photo documents			
<b>Prüfmuster-Nr.:</b> <i>Test sample No.:</i>	A001028342-001 to 003				
<b>Prüfzeitraum:</b> <i>Testing period:</i>	21.11.2019 - 10.12.2019				
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.				
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.				
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass				
<b>geprüft von / tested by:</b>		<b>kontrolliert von / reviewed by:</b>			
					
13.12.2019	Jackson Yang / Project Engineer	13.12.2019	Winnie Hou / Technical Certifier		
<b>Datum</b> <i>Date</i>	<b>Name/Stellung</b> <i>Name/Position</i>	<b>Unterschrift</b> <i>Signature</i>	<b>Datum</b> <i>Date</i>	<b>Name/Stellung</b> <i>Name/Position</i>	<b>Unterschrift</b> <i>Signature</i>
<b>Sonstiges / Other:</b>					
FCC ID: 2AEUPRBPS001 IC: 20271-RBPS001                          HVIN: 5AT1S6					
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>			<b>Prüfmuster vollständig und unbeschädigt</b> <i>Test item complete and undamaged:</i>		
* Legende: 1 = sehr gut                          2 = gut                          3 = befriedigend                          4 = ausreichend                          5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n)                          F(ail) = entspricht nicht o.g. Prüfgrundlage(n)                          N/A = nicht anwendbar                          N/T = nicht getestet Legend: 1 = very good                          2 = good                          3 = satisfactory                          4 = sufficient                          5 = poor P(ass) = passed a.m. test specifications(s)                          F(ail) = failed a.m. test specifications(s)                          N/A = not applicable                          N/T = not tested					
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					
V04					

## Test Summary

**5.1.1 ANTENNA REQUIREMENT***RESULT: Pass***5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER (FOR DTSS AND FHSS)***RESULT: Pass***5.1.3 CONDUCTED POWER SPECTRAL DENSITY (FOR DTSS)***RESULT: Pass***5.1.4 99% BANDWIDTH (FOR DTSS AND FHSS)***RESULT: Pass***5.1.5 CONDUCTED SPURIOUS EMISSIONS (FOR DTSS AND FHSS)***RESULT: Pass***5.1.6 RADIATED SPURIOUS EMISSION (FOR DTSS AND FHSS)***RESULT: Pass***5.1.7 20DB BANDWIDTH (FOR FHSS)***RESULT: Pass***5.1.8 6DB BANDWIDTH (FOR DTSS)***RESULT: Pass***5.1.9 CARRIER FREQUENCY SEPARATION (FOR FHSS)***RESULT: Pass***5.1.10 NUMBER OF HOPPING FREQUENCY (FOR FHSS)***RESULT: Pass***5.1.11 TIME OF OCCUPANCY (FOR FHSS)***RESULT: Pass***5.1.12 CONDUCTED EMISSION ON AC MAINS (FOR DTSS AND FHSS)***RESULT: Pass***5.1.13 RADIATED EMISSION***RESULT: Pass***6.1.1 ELECTROMAGNETIC FIELDS***RESULT: Pass*

## Contents

<b>1</b>	<b>GENERAL REMARKS .....</b>	<b>5</b>
<b>1.1</b>	<b>COMPLEMENTARY MATERIALS .....</b>	<b>5</b>
<b>2</b>	<b>TEST SITES .....</b>	<b>6</b>
<b>2.1</b>	<b>TEST FACILITIES .....</b>	<b>6</b>
<b>2.2</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS.....</b>	<b>6</b>
<b>2.3</b>	<b>TRACEABILITY .....</b>	<b>8</b>
<b>2.4</b>	<b>CALIBRATION .....</b>	<b>8</b>
<b>2.5</b>	<b>MEASUREMENT UNCERTAINTY.....</b>	<b>8</b>
<b>2.6</b>	<b>LOCATION OF ORIGINAL DATA.....</b>	<b>9</b>
<b>2.7</b>	<b>STATUS OF FACILITY USED FOR TESTING.....</b>	<b>9</b>
<b>3</b>	<b>GENERAL PRODUCT INFORMATION .....</b>	<b>10</b>
<b>3.1</b>	<b>PRODUCT FUNCTION AND INTENDED USE.....</b>	<b>10</b>
<b>3.2</b>	<b>RATINGS AND SYSTEM DETAILS .....</b>	<b>10</b>
<b>3.3</b>	<b>INDEPENDENT OPERATION MODES .....</b>	<b>13</b>
<b>3.4</b>	<b>NOISE GENERATING AND NOISE SUPPRESSING PARTS.....</b>	<b>13</b>
<b>3.5</b>	<b>SUBMITTED DOCUMENTS.....</b>	<b>13</b>
<b>4</b>	<b>TEST SET-UP AND OPERATION MODES .....</b>	<b>14</b>
<b>4.1</b>	<b>PRINCIPLE OF CONFIGURATION SELECTION .....</b>	<b>14</b>
<b>4.2</b>	<b>TEST OPERATION AND TEST SOFTWARE.....</b>	<b>14</b>
<b>4.3</b>	<b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....</b>	<b>14</b>
<b>4.4</b>	<b>COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....</b>	<b>14</b>
<b>4.5</b>	<b>TEST SETUP DIAGRAM.....</b>	<b>15</b>
<b>5</b>	<b>TEST RESULTS .....</b>	<b>17</b>
<b>5.1</b>	<b>TRANSMITTER REQUIREMENT &amp; TEST SUITES .....</b>	<b>17</b>
<i>5.1.1</i>	<i>Antenna Requirement.....</i>	<i>17</i>
<i>5.1.2</i>	<i>Maximum Peak Conducted Output Power (for DTSS and FHSs).....</i>	<i>18</i>
<i>5.1.3</i>	<i>Conducted Power Spectral Density (for DTSS).....</i>	<i>20</i>
<i>5.1.4</i>	<i>99% Bandwidth (for DTSS and FHSs).....</i>	<i>21</i>
<i>5.1.5</i>	<i>Conducted Spurious Emissions (for DTSS and FHSs) .....</i>	<i>23</i>
<i>5.1.6</i>	<i>Radiated Spurious Emission (for DTSS and FHSs) .....</i>	<i>24</i>
<i>5.1.7</i>	<i>20dB Bandwidth (for FHSs) .....</i>	<i>25</i>
<i>5.1.8</i>	<i>6dB Bandwidth (for DTSS) .....</i>	<i>26</i>
<i>5.1.9</i>	<i>Carrier Frequency Separation (for FHSs).....</i>	<i>27</i>
<i>5.1.10</i>	<i>Number of Hopping Frequency (for FHSs).....</i>	<i>29</i>
<i>5.1.11</i>	<i>Time of Occupancy (for FHSs).....</i>	<i>30</i>
<i>5.1.12</i>	<i>Conducted Emission on AC Mains (for DTSS and FHSs).....</i>	<i>31</i>
<i>5.1.13</i>	<i>Radiated Emission.....</i>	<i>32</i>
<b>6</b>	<b>SAFETY HUMAN EXPOSURE .....</b>	<b>33</b>
<b>6.1</b>	<b>RADIO FREQUENCY EXPOSURE COMPLIANCE .....</b>	<b>33</b>
<i>6.1.1</i>	<i>Electromagnetic Fields.....</i>	<i>33</i>

**Prüfbericht - Nr.: 50316655 001**  
*Test Report No.*

Seite 4 von 36  
Page 4 of 36

<b>7</b>	<b>PHOTOGRAPHS OF THE TEST SET-UP .....</b>	<b>36</b>
<b>8</b>	<b>LIST OF TABLES.....</b>	<b>36</b>

# 1 General Remarks

## 1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results of DTSS

Appendix C: Test Results of FHSs

Appendix D: Test Results of Radiated

Appendix E: Test Results of Part 15B and ICES 003

## 2 Test Sites

### 2.1 Test Facilities

**TÜV Rheinland (Shenzhen) Co., Ltd.**

1F East & 2-4F, Cybio Technology Building No. 1, No. 16 Kejibei 2nd Road, High-Tech Industrial Park North Nanshan District, Shenzhen, 518057

FCC accredited testing laboratory: CN1260

ISED wireless device testing laboratory: 25069

### 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

**TÜV Rheinland (Shenzhen) Co., Ltd.**

<b>Radio Spectrum Testing (TS8997)</b>					
<b>Equip. No.</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal. until</b>
1825795	Signal Analyzer	Rohde & Schwarz	FSV 40	101441	20.08.2020
1825798	OSP	Rohde & Schwarz	OSP 150	101017	20.12.2019
1825799	Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
1825800	Test Software	Rohde & Schwarz	WMS32 (V10.40.10)	N/A	N/A
1825801	Power Meter	Rohde & Schwarz	NRP2	107105	20.12.2019
1825802	Wideband Power Sensor	Rohde & Schwarz	NRP-Z81	105350	20.12.2019
1826431	Shielding Room 8#	Albatross	SR8	APC17151-SR8	23.07.2020
<b>Unwanted Emission Testing (TS9975)</b>					
<b>Equip. No.</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal. until</b>
1826021	EMI Test Receiver	Rohde & Schwarz	ESR 7	102021	19.08.2020
1826023	Signal Analyzer	Rohde & Schwarz	FSV 40	101439	21.08.2020
1826024	System Controller Interface	Rohde & Schwarz	SCI-100	S10010038	N/A
1826025	Filterbank	Rohde & Schwarz	Wlan	100759	21.08.2020
1826026	OSP	Rohde & Schwarz	OSP 120	102040	N/A
1826028	Pre-amplifier	Rohde & Schwarz	SCU08F1	08320031	20.08.2020
1826029	Amplifier	Rohde & Schwarz	SCU-18F	180070	20.08.2020
1826030	Amplifier	Rohde & Schwarz	SCU40A	100475	20.09.2020
1826031	Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	02.09.2020
1826032	Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	02.09.2020
1826033	Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	02.09.2020

1826034	Active Loop Antenna	Schwarzbeck	FMZB 1513	302	01.09.2020
1826035	Wideband Ridged Horn Antenna (12-18 GHz)	Steatite	QMS-00208	18313	02.09.2020
1826036	Test software	Rohde & Schwarz	V10.40.10-EMC32	N/A	N/A
1826037	Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
1826433	3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	06.07.2020

**Conducted Emission on AC Mains**

Equip. No.	Equipment	Manufacturer	Model	Serial No.	Cal. until
1822625	EMI Test Receiver	R&S	ESR3	102428	03.09.2020
1822627	Artificial Mains Network	R&S	ENV216	102333	19.08.2020

**Radiated Emission (3m chamber)**

Equip. No.	Equipment	Manufacturer	Model No.	Serial No.	Cali. until
1822620	3m SAC	ETS	SAC3	CT001632-Q1362	23.08.2021
1825044	EMI Test Receiver	R&S	ESR7	102111	23.01.2020
1825004	Horn Antenna	R&S	HF907	102706	01.09.2020
1825005	Preamplifier	FIT	SCU-18F	180077	19.08.2020
1825042	Trilog-Broadband antenna	SCHWARZBECK	VULB9168	0945	12.09.2020
1825090	EMC Measurement Software	R&S	EMC32(Ver.10.30.01)	N/A	N/A

## 2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	$\pm 2.5$ dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	$\pm 6$ dB
Radiated Emission of Receiver, valid up to 26.5 GHz	$\pm 6$ dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	$\pm 3.70$ dB / $\pm 3.30$ dB
Radiated Emission (3m SAC), 30MHz to 1000MHz	$\pm 4.52$ dB
Radiated Emission (3m SAC), above 1000MHz	$\pm 4.37$ dB
Temperature	$\pm 1$ °C
Humidity	$\pm 5$ %
Voltage (DC)	$\pm 1$ %
Voltage (AC, <10kHz)	$\pm 2$ %



## 2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B & C & D & E of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

## 2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 1F East & 2-4F, Cybio Technology Building No. 1, No. 16 Kejibei 2nd Road, High-Tech Industrial Park North Nanshan District, Shenzhen, 518057 is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

### 3 General Product Information

#### 3.1 Product Function and Intended Use

The EUT is a Solar Pathlight which supports Bluetooth Low Energy and 902-928MHz ISM Band (DTSS + FHSs) wireless technologies.

For details refer to the User Manual, Technical Description and Circuit Diagram.

#### 3.2 Ratings and System Details

**Table 2: Technical Specification of EUT**

General Information of EUT	Value
Kind of Equipment	Solar Pathlight
Type Designation	5AT1S6
Trademark	Ring
FCC ID	2AEUPRBPS001
IC	20271-RBPS001
HVIN	5AT1S6
Operating Voltage	DC 5V@1A by USB port DC 3.7V@3200mAh via internal battery
Testing Voltage	AC 120V@60Hz Fully charged battery
<b>Technical Specification of DTSS#1 (Bluetooth Low Energy)</b>	
Operating Frequency	2402 MHz to 2480 MHz
Type of Modulation	GFSK
Channel Number	40 channels
Channel Separation	2MHz
Antenna Type	Meandered Printed Monopole Antenna
Antenna Gain1 of Bluetooth	2.3 dBi
<b>Technical Specification of DTSS#2</b>	
Operating Frequency	902.5 MHz to 926.5 MHz
Type of Modulation	LoRa DTS
Channel Number	31 channels
Channel Bandwidth	500 KHz
Channel Separation	800 KHz
Antenna Type	Stamped Metal Inverted-F Antenna
Antenna Gain2	-0.5 dBi

<b>Technical Specification of DTSS#3</b>	
Operating Frequency	903.0 MHz to 914.2 MHz
Type of Modulation	LoRa DTS
Channel Number	7 channels
Channel Bandwidth	500 KHz
Channel Separation	1.6 MHz
Antenna Type	Stamped Metal Inverted-F Antenna
Antenna Gain2	-0.5 dBi
<b>Technical Specification of DTSS#4</b>	
Operating Frequency	923.3 MHz to 926.9 MHz
Type of Modulation	LoRa DTS
Channel Number	7 channels
Channel Bandwidth	500 KHz
Channel Separation	600 KHz
Antenna Type	Stamped Metal Inverted-F Antenna
Antenna Gain2	-0.5 dBi
<b>Technical Specification of FHSs#1</b>	
Operating Frequency	902.3 MHz to 926.7 MHz
Type of Modulation	LoRa FHSS
Channel Number	62 channels
Channel Bandwidth	250 KHz
Channel Separation	400 KHz
Antenna Type	Stamped Metal Inverted-F Antenna
Antenna Gain2	-0.5 dBi
<b>Technical Specification of FHSs#2</b>	
Operating Frequency	902.3 MHz to 914.9 MHz
Type of Modulation	LoRa FHSS
Channel Number	64 channels
Channel Bandwidth	125 KHz
Channel Separation	200 KHz
Antenna Type	Stamped Metal Inverted-F Antenna
Antenna Gain2	-0.5 dBi
<b>Technical Specification of FHSs#3</b>	
Operating Frequency	902.4 MHz to 927.6 MHz
Type of Modulation	FSK FHSS
Channel Number	64 channels
Data Rate	150 Kbps
Channel Separation	400 KHz
Antenna Type	Stamped Metal Inverted-F Antenna
Antenna Gain2	-0.5 dBi

<b>Technical Specification of FHSs#4</b>	
Operating Frequency	902.2 MHz to 927.8 MHz
Type of Modulation	FSK FHSS
Channel Number	129 channels
Data Rate	50 Kbps
Channel Separation	200 KHz
Antenna Type	Stamped Metal Inverted-F Antenna
Antenna Gain2	-0.5 dBi
<b>Technical Specification of FHSs#5</b>	
Operating Frequency	902.2 MHz to 927.8 MHz
Type of Modulation	FSK FHSS
Channel Number	129 channels
Data Rate	5 Kbps
Channel Separation	200 KHz
Antenna Type	Stamped Metal Inverted-F Antenna
Antenna Gain2	-0.5 dBi

**Table 3: Operating Frequencies/Channels of EUT**

Technology	Modulation	Channel Number	Channel Separation (MHz)	Channel Bandwidth (MHz)	Data Rate (Kbps)	Low CH (MHz)	Middle CH (MHz)	High CH (MHz)
DTSS #1 (BLE)	GFSK	40	2.0	1	1000	2402.0	2440.0	2480.0
DTSS #2	LoRa DTS	31	0.8	0.5	--	902.5	914.5	926.5
DTSS #3	LoRa DTS	7	1.6	0.5	--	903.0	907.8	914.2
DTSS #4	LoRa DTS	7	0.6	0.5	--	923.3	925.1	926.9
FHSs #1	LoRa FHSS	62	0.4	0.25	--	902.3	914.3	926.7
FHSs #2	LoRa FHSS	64	0.2	0.125	--	902.3	908.5	914.9
FHSs #3	FSK FHSS	64	0.4	--	150	902.4	914.8	927.6
FHSs #4	FSK FHSS	129	0.2	--	50	902.2	915.0	927.8
FHSs #5	FSK FHSS	129	0.2	--	5	902.2	915.0	927.8

### 3.3 Independent Operation Modes

The basic operation modes are:

- A. On
  - 1. Bluetooth Low Energy transmitting mode
    - 1) Low Channel
    - 2) Middle Channel
    - 3) High Channel
  - 2. DTSs transmitting mode
    - 1) Low Channel
    - 2) Middle Channel
    - 3) High Channel
  - 3. FHSs transmitting mode
    - 1) Low Channel
    - 2) Middle Channel
    - 3) High Channel
- B. On, Transmitting on Hopping channel
- C. On, Bluetooth connecting mode
- D. On, DTSs connecting mode
- E. On, FHSs connecting mode
- F. On, Lighting mode (with adapter)
- G. On, Lighting mode (without adapter)

### 3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

### 3.5 Submitted Documents

- Block Diagram
- Schematics
- FCC/IC Label and Location Info
- User Manual

## 4 Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

**Radio Spectrum:** The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### 4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013 and ANSI C63.4: 2014.

### 4.3 Special Accessories and Auxiliary Equipment

**Table 4: Cables Used during Test**

Description	Manufacturer	Model	Quantity	Length (m)
USB cable	N/A	N/A	1	0.5

**Table 5: Auxiliary Equipment Used during Test**

Description	Manufacturer	Model	S/N	Rating
Adapter	N/A	SA68-050200U	N/A	DC 5V@1A

### 4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

## 4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

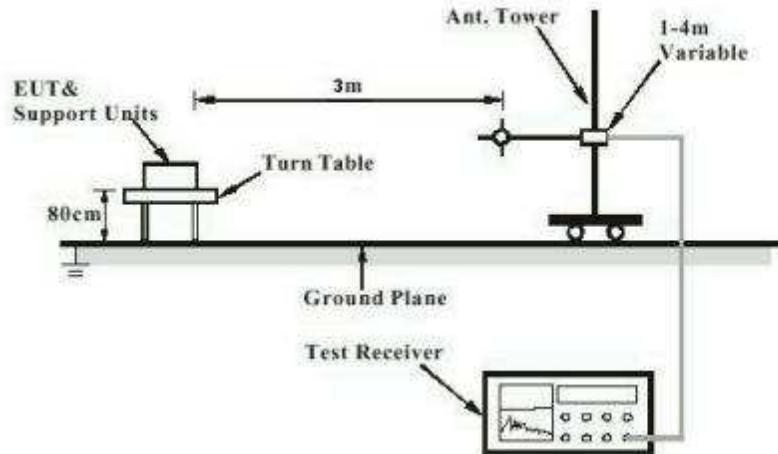


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

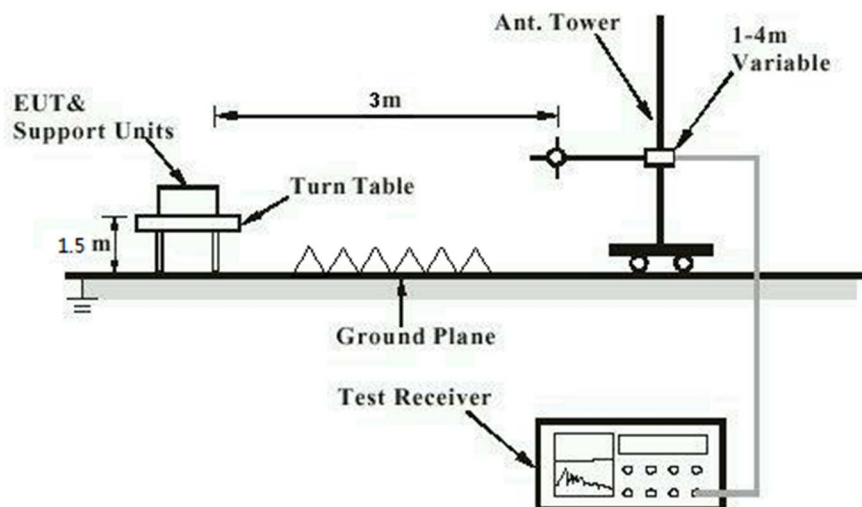


Diagram of Measurement Configuration for Mains Conduction Measurement


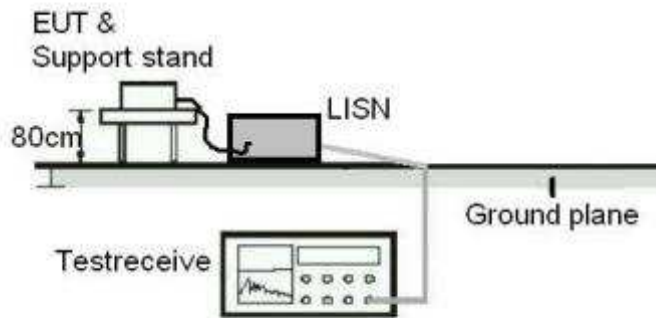


Diagram of Measurement Configuration for Conducted Transmitter Measurement



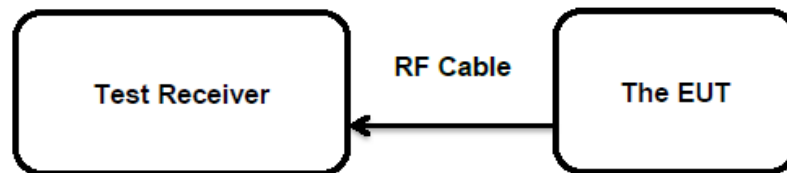

## 5 Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

**RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.247(b)(4) and Part 15.203

According to the manufacturer declared, the EUT has two internal antennas, the directional gain of antenna are 2.3 and -0.5 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

## 5.1.2 Maximum Peak Conducted Output Power (for DTSs and FHSs)

**RESULT:**
**Pass**
**Test Specification**

Test standard : FCC Part 15.247(b)(1), (2) and (3)  
                   : RSS-247 Clause 5.4(a), (b) and (d)  
 Basic standard : ANSI C63.10: 2013  
 Limits : DTSs < 1.0 Watts, FHSs < 0.25 Watts

Test standard	Technology	Frequency (MHz)	Limit (W)	Channel No.
FCC 15.247	DTSs	902-928 2400-2483.5	1.0	--
	FHSs	902-928	1.0	≥ 50
			0.25	25 ≤ channels < 50
RSS-247	DTSs	902-928 2400-2483.5	1.0(e.i.r.p<4.0)	--
	FHSs	902-928	1.0(e.i.r.p<4.0)	≥ 50
			0.25(e.i.r.p<1.0)	25 ≤ channels < 50

Kind of test site : Shielded Room

**Test Setup**

Date of testing : 07.12.2019  
 Input voltage : Fully charged battery  
 Operation mode : A  
 Test channel : Low / Middle / High  
 Ambient temperature : 25 °C  
 Relative humidity : 56 %  
 Atmospheric pressure : 101 kPa

For details refer to following test result.

**Table 6: Test Result of Maximum Peak Conducted Output Power**

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
DTs#1 (BLE)	Low CH	6.40	0.0044	< 1
	Middle CH	4.70	0.0030	
	High CH	4.70	0.0030	
DTs#2	Low CH	19.13	0.0818	< 1
	Middle CH	19.08	0.0809	
	High CH	18.89	0.0774	
DTs#3	Low CH	19.16	0.0824	< 1
	Middle CH	19.08	0.0809	
	High CH	19.01	0.0796	
DTs#4	Low CH	18.93	0.0782	< 1
	Middle CH	18.94	0.0783	
	High CH	18.87	0.0771	
FHSs#1	Low CH	19.58	0.0908	< 1
	Middle CH	19.53	0.0897	
	High CH	19.39	0.0869	
FHSs#2	Low CH	19.21	0.0834	< 1
	Middle CH	19.15	0.0822	
	High CH	19.06	0.0805	
FHSs#3	Low CH	18.96	0.0787	< 1
	Middle CH	18.89	0.0774	
	High CH	18.78	0.0755	
FHSs#4	Low CH	18.93	0.0782	< 1
	Middle CH	18.84	0.0766	
	High CH	18.66	0.0735	
FHSs#5	Low CH	18.47	0.0703	< 1
	Middle CH	18.65	0.0733	
	High CH	18.47	0.0703	

**Note:**

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G) of BLE: 2.3 dBi,
- 3) Antenna gain(G) of DTs: -0.5 dBi,
- 4) Antenna gain(G) of FHSs: -0.5 dBi,

The Maximum peak conducted output power (e.i.r.p.)= $P_{(\text{Peak power})} + G$ , which is far below the 4 W

### 5.1.3 Conducted Power Spectral Density (for DTSSs)

**RESULT:**
**Pass**
**Test Specification**

Test standard : FCC Part 15.247(e)  
                   : RSS-247 Clause 5.2(b)  
 Basic standard : ANSI C63.10: 2013  
 Limits : < 8 dBm / 3kHz  
 Kind of test site : Shielded Room

**Test Setup**

Date of testing : Refer to test data  
 Input voltage : Fully charged battery  
 Operation mode : A.1, A.2  
 Test channel : Low / Middle / High  
 Ambient temperature : 25 °C  
 Relative humidity : 56 %  
 Atmospheric pressure : 101 kPa

For details refer to following test result.

**Table 7: Test Result of Power Spectral Density**

Test Mode	Test Channel (MHz)	Measured Peak Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
DTSS#1 (BLE)	Low CH	-11.45	8 dBm / 3kHz
	Middle CH	-11.31	
	High CH	-11.42	
DTSS#2	Low CH	-1.85	
	Middle CH	-1.77	
	High CH	-1.82	
DTSS#3	Low CH	-1.90	
	Middle CH	-1.66	
	High CH	-2.24	
DTSS#4	Low CH	-1.97	
	Middle CH	-1.79	
	High CH	-1.86	

Note: The cable loss is taken into account in results.

For the measurement records, refer to the appendix B.

**5.1.4 99% Bandwidth (for DTSS and FHSs)****RESULT:****Pass****Test Specification**

Test standard : RSS-Gen Clause 6.7  
Basic standard : ANSI C63.10: 2013  
Kind of test site : Shielded Room

**Test Setup**

Date of testing : Refer to test data  
Input voltage : Fully charged battery  
Operation mode : A  
Test channel : Low / Middle / High  
Ambient temperature : 25 °C  
Relative humidity : 56 %  
Atmospheric pressure : 101 kPa

For details refer to following test result.

**Table 8: Test Result of 99% Bandwidth**

Test Mode	Test Channel (MHz)	99% Bandwidth (MHz)	Limit
DTSs#1 (BLE)	Low CH	1.042	/
	Middle CH	1.042	
	High CH	1.042	
DTSs#2	Low CH	0.524	
	Middle CH	0.519	
	High CH	0.517	
DTSs#3	Low CH	0.512	
	Middle CH	0.512	
	High CH	0.527	
DTSs#4	Low CH	0.514	
	Middle CH	0.514	
	High CH	0.514	
FHSs#1	Low CH	0.271	
	Middle CH	0.271	
	High CH	0.273	
FHSs#2	Low CH	0.130	
	Middle CH	0.130	
	High CH	0.130	
FHSs#3	Low CH	0.156	
	Middle CH	0.158	
	High CH	0.155	
FHSs#4	Low CH	0.103	
	Middle CH	0.103	
	High CH	0.103	
FHSs#5	Low CH	0.010	
	Middle CH	0.010	
	High CH	0.010	

For the measurement records, refer to the appendix B and C.

### 5.1.5 Conducted Spurious Emissions (for DTSS and FHSs)

**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(d) RSS-247 Clause 5.5
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: Refer to test data
Input voltage	: Fully charged battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix B and C.

### 5.1.6 Radiated Spurious Emission (for DTSs and FHSs)

**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.247(d) & FCC Part 15.205 RSS-247 Clause 3.3
Basic standard	:	ANSI C63.10: 2013
Limits	:	FCC Part 15.209(a) RSS-Gen Table 5
Kind of test site	:	3m Semi-anechoic Chamber

**Test Setup**

Date of testing	:	Refer to test data
Input voltage	:	Fully charged battery
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	23 °C
Relative humidity	:	42 %
Atmospheric pressure	:	101 kPa

**Remark:**

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix D.



### 5.1.7 20dB Bandwidth (for FHSs)

**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.247(a)(1)(i) RSS-247 Clause 5.1(c)
Basic standard	:	ANSI C63.10: 2013
Limits	:	< 500KHz
Kind of test site	:	Shielded Room

**Test Setup**

Date of testing	:	Refer to test data
Input voltage	:	Fully charged battery
Operation mode	:	A.3
Test channel	:	Low / Middle / High
Ambient temperature	:	25 °C
Relative humidity	:	56 %
Atmospheric pressure	:	101 kPa

For details refer to following test result.

**Table 9: Test Result of 20dB Bandwidth**

Test Mode	Test Channel (MHz)	20dB Bandwidth (kHz)	Limit
FHSs#1	Low CH	316.70	< 500KHz
	Middle CH	308.70	
	High CH	315.70	
FHSs#2	Low CH	154.05	
	Middle CH	155.24	
	High CH	153.45	
FHSs#3	Low CH	170.83	
	Middle CH	171.43	
	High CH	172.03	
FHSs#4	Low CH	108.39	
	Middle CH	111.39	
	High CH	109.89	
FHSs#5	Low CH	10.40	
	Middle CH	9.47	
	High CH	9.95	

For the measurement records, refer to the appendix C.

### 5.1.8 6dB Bandwidth (for DTSSs)

**RESULT:**
**Pass**
**Test Specification**

Test standard : FCC Part 15.247(a)(2)  
RSS-247 Clause 5.2(a)

Basic standard : ANSI C63.10: 2013

Limits : > 500 KHz

Kind of test site : Shielded Room

**Test Setup**

Date of testing : Refer to test data

Input voltage : Fully charged battery

Operation mode : A.1, A.2

Test channel : Low / Middle / High

Ambient temperature : 25 °C

Relative humidity : 56 %

Atmospheric pressure : 101 kPa

For details refer to following test result.

**Table 10: Test Result of 6dB Bandwidth**

Test Mode	Test Channel (MHz)	6dB Bandwidth (kHz)	Limit
DTSS#1 (BLE)	Low CH	594.1	> 500KHz
	Middle CH	594.1	
	High CH	594.1	
DTSS#2	Low CH	622.3	
	Middle CH	622.3	
	High CH	619.4	
DTSS#3	Low CH	625.2	
	Middle CH	619.4	
	High CH	622.3	
DTSS#4	Low CH	619.4	
	Middle CH	622.3	
	High CH	622.3	

For the measurement records, refer to the appendix B.

### 5.1.9 Carrier Frequency Separation (for FHSs)

**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(a)(1) RSS-247 Clause 5.1(b)
Basic standard	: ANSI C63.10: 2013
Limits	: $\geq 25\text{kHz}$ or 20dB bandwidth, whichever is greater
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: Refer to test data
Input voltage	: Fully charged battery
Operation mode	: B
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For details refer to following test result.

**Table 11: Test Result of Carrier Frequency Separation**

Test Mode	Test Channel	Measured Channel Separation (KHz)	Limit (kHz)
FHSs#1	Low Channel	399.6	≥ 316.7
	Adjacency Channel		
	Middle Channel	399.8	
	Adjacency Channel		
	High Channel	399.8	
	Adjacency Channel		
FHSs#2	Low Channel	199.9	≥ 155.24
	Adjacency Channel		
	Middle Channel	199.9	
	Adjacency Channel		
	High Channel	199.9	
	Adjacency Channel		
FHSs#3	Low Channel	400.3	≥ 172.03
	Adjacency Channel		
	Middle Channel	399.8	
	Adjacency Channel		
	High Channel	399.8	
	Adjacency Channel		
FHSs#4	Low Channel	199.9	≥ 111.39
	Adjacency Channel		
	Middle Channel	199.9	
	Adjacency Channel		
	High Channel	200.0	
	Adjacency Channel		
FHSs#5	Low Channel	199.9	≥ 25.0
	Adjacency Channel		
	Middle Channel	199.9	
	Adjacency Channel		
	High Channel	200.0	
	Adjacency Channel		

For the measurement records, refer to the appendix C.

### 5.1.10 Number of Hopping Frequency (for FHSs)

**RESULT:**
**Pass**
**Test Specification**

Test standard	: FCC part 15.247(a)(1)(i) RSS-247 Clause 5.1(c)
Basic standard	: ANSI C63.10: 2013
Limits	: $\geq 50$ hopping frequencies for 20dB BW less than 250kHz : $\geq 25$ hopping frequencies for 20dB BW greater than 250kHz
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: Refer to test data
Input voltage	: Fully charged battery
Operation mode	: B
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For details refer to following test result.

**Table 12: Test Result of Number of Hopping Frequency**

Test Mode	Frequency Range	Measured Quantity of Hopping Channel	Limit
FHSs#1	902.3 MHz to 926.7 MHz	62	$\geq 25$
FHSs#2	902.3 MHz to 914.9 MHz	64	$\geq 50$
FHSs#3	902.4 MHz to 927.6 MHz	64	$\geq 50$
FHSs#4	902.2 MHz to 927.8 MHz	129	$\geq 50$
FHSs#5	902.2 MHz to 927.8 MHz	129	$\geq 50$

For the measurement records, refer to the appendix C.

### 5.1.11 Time of Occupancy (for FHSs)

**RESULT:**
**Pass**
**Test Specification**

Test standard : FCC part 15.247(a)(1)(i)  
RSS-247 Clause 5.1(c)

Basic standard : ANSI C63.10: 2013

Limits : < 0.4s

Kind of test site : Shielded Room

**Test Setup**

Date of testing : Refer to test data

Input voltage : Fully charged battery

Operation mode : B

Test channel : Low / Middle / High

Ambient temperature : 25 °C

Relative humidity : 56 %

Atmospheric pressure : 101 kPa

Note:

Dwell time = Pulse width x Number of channels in Period

For details refer to following test result.

**Table 13: Test Result of Time of Occupancy**

Test Mode	Test Channel (MHz)	Pulse Width(ms)	Number of Channels	Period (S)	Measured Dwell Time(s)	Limit (s)
FHSs#1	Middle CH	300.0	1	10s	0.300	0.4s
FHSs#2	Middle CH	340.0	1	20s	0.340	0.4s
FHSs#3	Middle CH	310.0	1	20s	0.310	0.4s
FHSs#4	Middle CH	270.0	1	20s	0.270	0.4s
FHSs#5	Middle CH	50.0	2	20s	0.100	0.4s

For the measurement records, refer to the appendix C.

**5.1.12 Conducted Emission on AC Mains (for DTs and FHSs)****RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.207(a) & FCC Part 15.107(a) RSS-Gen Clause 8.8 & ICES-003
Basic standard	: ANSI C63.10: 2013 & ANSI C63.4: 2014
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a) & FCC Part 15.107(a) RSS-Gen Clause 8.8 Table 4 & ICES-003 Table 2
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: Refer to test data
Input voltage	: AC 120V@60Hz
Operation mode	: C, D, E, F
Earthing	: Not connected
Ambient temperature	: 24 °C
Relative humidity	: 53 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B and C and E.

### 5.1.13 Radiated Emission

**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.109(a) ICES-003
Basic standard	:	ANSI C63.4: 2014
Frequency range	:	30 - 6000MHz
Classification	:	Class B
Limits	:	FCC Part 15.109(a) ICES-003 Table 5 & Table 7
Kind of test site	:	3m Semi-anechoic Chamber

**Test Setup**

Date of testing	:	Refer to test data
Input voltage	:	AC 120V@60Hz Fully charged battery
Operation mode	:	F, G
Earthing	:	Not connected
Ambient temperature	:	24 °C
Relative humidity	:	53 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix E.



## 6 Safety Human Exposure

### 6.1 Radio Frequency Exposure Compliance

#### 6.1.1 Electromagnetic Fields

RESULT:

Pass

**Test Specification**

Test standard

: CFR47 FCC Part 2: Section 2.1091  
CFR47 FCC Part 1: Section 1.1310  
FCC KDB Publication 447498 v06  
FCC KDB Publication 865664 D01 v01r04  
FCC KDB Publication 865664 D02 v01r02  
RSS-102 Issue 5 March 2015

**➤ FCC requirements**

**FCC requirement:** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 20cm normally can be maintained between the user and the device.

**MPE Calculation Method according to KDB 447498 v06**Power Density:  $S_{(mW/cm^2)} = PG/4\pi R^2$  or  $EIRP/4\pi R^2$ 

Where:

S = power density (mW/cm<sup>2</sup>)

P = power input to the antenna (mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (cm)

From the peak RF output power, the minimum mobile separation distance, d=20 cm, as well as the antenna gain (Max. 2.3 dBi for BLE, Max -0.5 dBi for DTSSs and FHSs), the RF power density can be calculated as below:

$$S_{(mW/cm^2)} = PG/4\pi R^2$$

**a) EUT RF Exposure Evaluation standalone operations**

Test Mode	Measured Peak Power		Antenna Gain (dBi)	Measured e.i.r.p (mW)		$S_{(mW/cm^2)} = \frac{PG}{4\pi R^2}$
	(dBm)	(W)		(dBm)	(W)	
DTSS#1(BLE)	6.40	0.0044	2.3	8.70	0.0074	0.0015
DTSS#2	19.13	0.0818	-0.5	18.63	0.0729	0.0145
DTSS#3	19.16	0.0824	-0.5	18.66	0.0735	0.0146
DTSS#4	18.94	0.0783	-0.5	18.44	0.0698	0.0139
FHSS#1	19.58	0.0908	-0.5	19.08	0.0809	0.0161
FHSS#2	19.21	0.0834	-0.5	18.71	0.0743	0.0148
FHSS#3	18.96	0.0787	-0.5	18.46	0.0701	0.0140
FHSS#4	18.93	0.0782	-0.5	18.43	0.0697	0.0139
FHSS#5	18.65	0.0733	-0.5	18.15	0.0653	0.0130

**b) EUT RF Exposure Evaluation simultaneous transmission operations**

Simultaneous transmission mode	The sum of the ratios	Result
BLE + DTSSs	$0.0015/1 + 0.0146/1 < 1$	Pass
BLE + FHSSs	$0.0015/1 + 0.0161/1 < 1$	Pass

**Limits for Maximum Permissible Exposure (MPE) according to FCC Part 1.1310:**

 1.0 mW/cm<sup>2</sup>

➤ **IC requirements:** The EUT shall comply with the requirement of RSS-102 section 2.5.2.

#### Exemption from Routine Evaluation Limits – RF Exposure Evaluation

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $1.31 \times 10^{-2} f^{0.6834}$  W (adjusted for tune-up tolerance), where  $f$  is in MHz;

- RF exposure evaluation exempted power for BLE: 2.670 W
- RF exposure evaluation exempted power for DTSSs and FHSs: 1.37 W

#### a) EUT RF Exposure Evaluation standalone operations:

Test Mode	Measured Peak Power		Antenna Gain (dBi)	Measured e.i.r.p (mW)	
	(dBm)	(W)		(dBm)	(W)
DTSSs#1(BLE)	6.40	0.0044	2.3	8.70	0.0074
DTSSs#2	19.13	0.0818	-0.5	18.63	0.0729
DTSSs#3	19.16	0.0824	-0.5	18.66	0.0735
DTSSs#4	18.94	0.0783	-0.5	18.44	0.0698
FHSs#1	19.58	0.0908	-0.5	19.08	0.0809
FHSs#2	19.21	0.0834	-0.5	18.71	0.0743
FHSs#3	18.96	0.0787	-0.5	18.46	0.0701
FHSs#4	18.93	0.0782	-0.5	18.43	0.0697
FHSs#5	18.65	0.0733	-0.5	18.15	0.0653

#### b) EUT RF Exposure Evaluation simultaneous transmission operations

Simultaneous transmission mode	The sum of the ratios	Result
BLE + DTSSs	$0.0074/2.67 + 0.0735/1.37 < 1$	Pass
BLE + FHSs	$0.0074/2.67 + 0.0809/1.37 < 1$	Pass

The e.i.r.p. for BLE, DTSSs and FHSs are less than the RF exposure evaluation exempted power. So RF exposure evaluation is not required.

**“RF Radiation Exposure Statement Caution: This Transmitter must be installed to provide a separation distance of at least 20 cm from all persons.”**

## 7 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

## 8 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Technical Specification of EUT .....	10
Table 3: Operating Frequencies/Channels of EUT .....	12
Table 4: Cables Used during Test .....	14
Table 5: Auxiliary Equipment Used during Test .....	14
Table 6: Test Result of Maximum Peak Conducted Output Power.....	19
Table 7: Test Result of Power Spectral Density .....	20
Table 8: Test Result of 99% Bandwidth .....	22
Table 9: Test Result of 20dB Bandwidth.....	25
Table 10: Test Result of 6dB Bandwidth.....	26
Table 11: Test Result of Carrier Frequency Separation .....	28
Table 12: Test Result of Number of Hopping Frequency .....	29
Table 13: Test Result of Time of Occupancy .....	30