

<b>Prüfbericht-Nr.:</b> <i>Test report No.:</i>	<b>50316655 002</b>	<b>Auftrags-Nr.:</b> <i>Order No.:</i>	168145437	<b>Seite 1 von 25</b> <i>Page 1 of 25</i>	
<b>Kunden-Referenz-Nr.:</b> <i>Client reference No.:</i>	N/A	<b>Auftragsdatum:</b> <i>Order date.:</i>	17.12.2019		
<b>Auftraggeber:</b> <i>Client:</i>	<b>Ring LLC</b> 1523 26th Street, Santa Monica, California 90404, United States				
<b>Prüfgegenstand:</b> <i>Test item:</i>	Solar Pathlight				
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type No.:</i>	5AT1S6 (Trademark: Ring)				
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	FCC and IC approval				
<b>Prüfgrundlage:</b> <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 CFR47 FCC Part 2: Section 2.1091				
<b>Wareneingangsdatum:</b> <i>Date of receipt:</i>	18.12.2019	Please refer to photo documents			
<b>Prüfmuster-Nr.:</b> <i>Test sample No.:</i>	A001028342-001 to 003				
<b>Prüfzeitraum:</b> <i>Testing period:</i>	18.12.2019 - 20.12.2019				
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.				
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.				
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass				
<b>geprüft von / tested by:</b>  Jackson Yang		<b>kontrolliert von / reviewed by:</b>  Winnie Hou			
06.01.2020	Jackson Yang / Project Engineer	06.01.2020	Winnie Hou / Technical Certifier		
<b>Datum</b> <i>Date</i>	<b>Name/Stellung</b> <i>Name/Position</i>	<b>Unterschrift</b> <i>Signature</i>	<b>Datum</b> <i>Date</i>	<b>Name/Stellung</b> <i>Name/Position</i>	<b>Unterschrift</b> <i>Signature</i>
<b>Sonstiges / Other:</b>					
This test report is for approval of removing one FHSS technology and adding two different FHSS technologies by software and optimize circuit (remove CC13, L9 change to 12nH from 15nH) based on test report 50316655 001. It is Class II permissive change for FCC and Class III permissive change for IC.					
FCC ID: 2AEUPRBPS001					
IC: 20271-RBPS001    HVIN: 5AT1S6    FVIN: Ver1.7.16-56					
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>			<b>Prüfmuster vollständig und unbeschädigt</b> <i>Test item complete and undamaged:</i>		
* Legende: 1 = sehr gut    2 = gut    3 = befriedigend    4 = ausreichend    5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n)    F(ail) = entspricht nicht o.g. Prüfgrundlage(n)    N/A = nicht anwendbar    N/T = nicht getestet					
Legend: 1 = very good    2 = good    3 = satisfactory    4 = sufficient    5 = poor P(ass) = passed a.m. test specifications(s)    F(ail) = failed a.m. test specifications(s)    N/A = not applicable    N/T = not tested					
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b>					
<i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

V04

## Test Summary

**5.1.1 ANTENNA REQUIREMENT***RESULT: Pass***5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER***RESULT: Pass***5.1.3 99% BANDWIDTH***RESULT: Pass***5.1.4 CONDUCTED SPURIOUS EMISSIONS***RESULT: Pass***5.1.5 RADIATED SPURIOUS EMISSION***RESULT: Pass***5.1.6 20dB BANDWIDTH***RESULT: Pass***5.1.7 CARRIER FREQUENCY SEPARATION***RESULT: Pass***5.1.8 NUMBER OF HOPPING FREQUENCY***RESULT: Pass***5.1.9 TIME OF OCCUPANCY***RESULT: Pass***6.1.1 ELECTROMAGNETIC FIELDS***RESULT: Pass*

## Contents

<b>1</b>	<b>GENERAL REMARKS .....</b>	<b>4</b>
<b>1.1</b>	<b>COMPLEMENTARY MATERIALS .....</b>	<b>4</b>
<b>2</b>	<b>TEST SITES .....</b>	<b>5</b>
<b>2.1</b>	<b>TEST FACILITIES .....</b>	<b>5</b>
<b>2.2</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS.....</b>	<b>5</b>
<b>2.3</b>	<b>TRACEABILITY .....</b>	<b>6</b>
<b>2.4</b>	<b>CALIBRATION .....</b>	<b>6</b>
<b>2.5</b>	<b>MEASUREMENT UNCERTAINTY.....</b>	<b>6</b>
<b>2.6</b>	<b>LOCATION OF ORIGINAL DATA.....</b>	<b>7</b>
<b>2.7</b>	<b>STATUS OF FACILITY USED FOR TESTING.....</b>	<b>7</b>
<b>3</b>	<b>GENERAL PRODUCT INFORMATION .....</b>	<b>8</b>
<b>3.1</b>	<b>PRODUCT FUNCTION AND INTENDED USE.....</b>	<b>8</b>
<b>3.2</b>	<b>RATINGS AND SYSTEM DETAILS .....</b>	<b>8</b>
<b>3.3</b>	<b>INDEPENDENT OPERATION MODES .....</b>	<b>10</b>
<b>3.4</b>	<b>NOISE GENERATING AND NOISE SUPPRESSING PARTS.....</b>	<b>10</b>
<b>3.5</b>	<b>SUBMITTED DOCUMENTS.....</b>	<b>10</b>
<b>4</b>	<b>TEST SET-UP AND OPERATION MODES .....</b>	<b>11</b>
<b>4.1</b>	<b>PRINCIPLE OF CONFIGURATION SELECTION .....</b>	<b>11</b>
<b>4.2</b>	<b>TEST OPERATION AND TEST SOFTWARE.....</b>	<b>11</b>
<b>4.3</b>	<b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....</b>	<b>11</b>
<b>4.4</b>	<b>COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....</b>	<b>11</b>
<b>4.5</b>	<b>TEST SETUP DIAGRAM.....</b>	<b>12</b>
<b>5</b>	<b>TEST RESULTS .....</b>	<b>14</b>
<b>5.1</b>	<b>TRANSMITTER REQUIREMENT &amp; TEST SUITES .....</b>	<b>14</b>
<i>5.1.1</i>	<i>Antenna Requirement .....</i>	<i>14</i>
<i>5.1.2</i>	<i>Maximum Peak Conducted Output Power.....</i>	<i>15</i>
<i>5.1.3</i>	<i>99% Bandwidth .....</i>	<i>16</i>
<i>5.1.4</i>	<i>Conducted Spurious Emissions .....</i>	<i>17</i>
<i>5.1.5</i>	<i>Radiated Spurious Emission .....</i>	<i>18</i>
<i>5.1.6</i>	<i>20dB Bandwidth.....</i>	<i>19</i>
<i>5.1.7</i>	<i>Carrier Frequency Separation.....</i>	<i>20</i>
<i>5.1.8</i>	<i>Number of Hopping Frequency.....</i>	<i>21</i>
<i>5.1.9</i>	<i>Time of Occupancy .....</i>	<i>22</i>
<b>6</b>	<b>SAFETY HUMAN EXPOSURE .....</b>	<b>23</b>
<b>6.1</b>	<b>RADIO FREQUENCY EXPOSURE COMPLIANCE .....</b>	<b>23</b>
<i>6.1.1</i>	<i>Electromagnetic Fields.....</i>	<i>23</i>
<b>7</b>	<b>PHOTOGRAPHS OF THE TEST SET-UP.....</b>	<b>25</b>
<b>8</b>	<b>LIST OF TABLES.....</b>	<b>25</b>

# 1 General Remarks

## 1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results of FHSs

## 2 Test Sites

### 2.1 Test Facilities

**TÜV Rheinland (Shenzhen) Co., Ltd.**

1F East & 2-4F, Cybio Technology Building No. 1, No. 16 Kejibei 2nd Road, High-Tech Industrial Park North Nanshan District, Shenzhen, 518057

FCC accredited testing laboratory: CN1260

ISED wireless device testing laboratory: 25069

### 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**
**TÜV Rheinland (Shenzhen) Co., Ltd.**

<b>Radio Spectrum Testing (TS8997)</b>					
<b>Equip. No.</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal. until</b>
1825795	Signal Analyzer	Rohde & Schwarz	FSV 40	101441	20.08.2020
1825798	OSP	Rohde & Schwarz	OSP 150	101017	17.12.2020
1825799	Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
1825800	Test Software	Rohde & Schwarz	WMS32 (V10.40.10)	N/A	N/A
1825801	Power Meter	Rohde & Schwarz	NRP2	107105	17.12.2020
1825802	Wideband Power Sensor	Rohde & Schwarz	NRP-Z81	105350	17.12.2020
1826431	Shielding Room 8#	Albatross	SR8	APC17151-SR8	23.07.2020
<b>Unwanted Emission Testing (TS9975)</b>					
<b>Equip. No.</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal. until</b>
1826021	EMI Test Receiver	Rohde & Schwarz	ESR 7	102021	19.08.2020
1826023	Signal Analyzer	Rohde & Schwarz	FSV 40	101439	21.08.2020
1826024	System Controller Interface	Rohde & Schwarz	SCI-100	S10010038	N/A
1826025	Filterbank	Rohde & Schwarz	Wlan	100759	21.08.2020
1826026	OSP	Rohde & Schwarz	OSP 120	102040	N/A
1826028	Pre-amplifier	Rohde & Schwarz	SCU08F1	08320031	20.08.2020
1826029	Amplifier	Rohde & Schwarz	SCU-18F	180070	20.08.2020
1826030	Amplifier	Rohde & Schwarz	SCU40A	100475	20.09.2020
1826031	Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	02.09.2020
1826032	Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	02.09.2020
1826033	Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	02.09.2020

1826034	Active Loop Antenna	Schwarzbeck	FMZB 1513	302	01.09.2020
1826035	Wideband Ridged Horn Antenna (12-18 GHz)	Steatite	QMS-00208	18313	02.09.2020
1826036	Test software	Rohde & Schwarz	V10.40.10-EMC32	N/A	N/A
1826037	Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
1826433	3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	06.07.2020

## 2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	$\pm 2.5$ dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	$\pm 6$ dB
Radiated Emission of Receiver, valid up to 26.5 GHz	$\pm 6$ dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	$\pm 3.70$ dB / $\pm 3.30$ dB
Radiated Emission (3m SAC), 30MHz to 1000MHz	$\pm 4.52$ dB
Radiated Emission (3m SAC), above 1000MHz	$\pm 4.37$ dB
Temperature	$\pm 1$ °C
Humidity	$\pm 5$ %
Voltage (DC)	$\pm 1$ %
Voltage (AC, <10kHz)	$\pm 2$ %

## 2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

## 2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 1F East & 2-4F, Cybio Technology Building No. 1, No. 16 Kejibei 2nd Road, High-Tech Industrial Park North Nanshan District, Shenzhen, 518057 is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

### 3 General Product Information

#### 3.1 Product Function and Intended Use

The EUT is a Solar Pathlight which supports Bluetooth Low Energy and 902-928MHz ISM Band (DTSs + FHSS) wireless technologies.

This test report is for approval of removing one FHSS technology and adding two different FHSS technologies by software and optimize circuit (remove CC13, L9 change to 12nH from 15nH) based on test report 50316655 001. It is Class II permissive change for FCC and Class III permissive change for IC. See below table for details:

Technology	Modulation	Operating Frequency (MHz)	Channel Number	Report No.
DTS #1 (BLE)	GFSK	2402.0 to 2480.0	40	50316655 001
DTS #2	LoRa DTS	902.5 to 926.5	31	50316655 001
DTS #3	LoRa DTS	903.0 to 914.2	7	50316655 001
DTS #4	LoRa DTS	923.3 to 926.9	7	50316655 001
FHSS #1	LoRa FHSS	902.3 to 926.7	62	50316655 001
FHSS #2	LoRa FHSS	902.2 to 927.8	129	50316655 002
FHSS #3	FSK FHSS	902.4 to 927.6	64	50316655 001
FHSS #4	FSK FHSS	902.2 to 927.8	129	50316655 001
FHSS #5	FSK FHSS	902.2 to 927.8	129	50316655 001
FHSS #6	FSK FHSS	902.5 to 927.5	51	50316655 002

For details refer to the User Manual, Technical Description and Circuit Diagram.

#### 3.2 Ratings and System Details

**Table 2: Technical Specification of EUT**

General Information of EUT	Value
Kind of Equipment	Solar Pathlight
Type Designation	5AT1S6
Trademark	Ring
FCC ID	2AEUPRBPS001
IC	20271-RBPS001
HVIN	5AT1S6
Operating Voltage	DC 5V@1A by USB port DC 3.7V@3200mAh via internal battery
Testing Voltage	AC 120V@60Hz Fully charged battery
Technical Specification of FHSS#2	
Operating Frequency	902.2 MHz to 927.8 MHz
Type of Modulation	LoRa FHSS
Channel Number	129 channels
Channel Bandwidth	125 KHz



Channel Separation	200 KHz
Antenna Type	Stamped Metal Inverted-F Antenna
Antenna Gain	-0.5 dBi
<b>Technical Specification of FHSs#6</b>	
Operating Frequency	902.5 MHz to 927.5 MHz
Type of Modulation	FSK FHSS
Channel Number	51 channels
Data Rate	250 Kbps
Channel Separation	500 KHz
Antenna Type	Stamped Metal Inverted-F Antenna
Antenna Gain	-0.5 dBi

**Table 3: Operating Frequencies/Channels of EUT**

Technology	Modulation	Channel Number	Channel Separation (MHz)	Channel Bandwidth (MHz)	Data Rate (Kbps)	Low CH (MHz)	Middle CH (MHz)	High CH (MHz)
FHSs #2	LoRa FHSS	129	0.2	0.125	--	902.2	915	927.8
FHSs #6	FSK FHSS	51	0.5	--	250	902.5	915	927.5

### 3.3 Independent Operation Modes

The basic operation modes are:

- A. On, FHSs transmitting mode
  - 1) Low Channel
  - 2) Middle Channel
  - 3) High Channel
- B. On, Transmitting on Hopping channel
- C. Off

### 3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

### 3.5 Submitted Documents

- Block Diagram

- User Manual

## 4 Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

**Radio Spectrum:** The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### 4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all additional tests were performed on FHSS#2 & #6 in this report.

### 4.3 Special Accessories and Auxiliary Equipment

Table 4: Cables Used during Test

Description	Manufacturer	Model	Quantity	Length (m)
USB cable	N/A	N/A	1	0.5

Table 5: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N	Rating
-	-	-	-	-

### 4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

## 4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

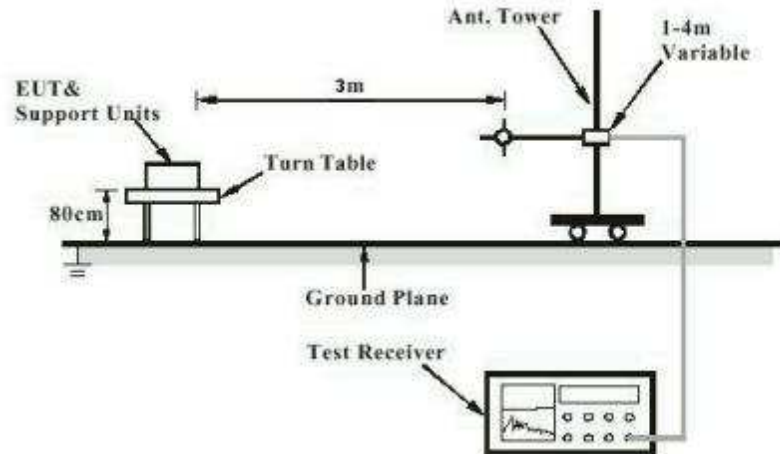


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

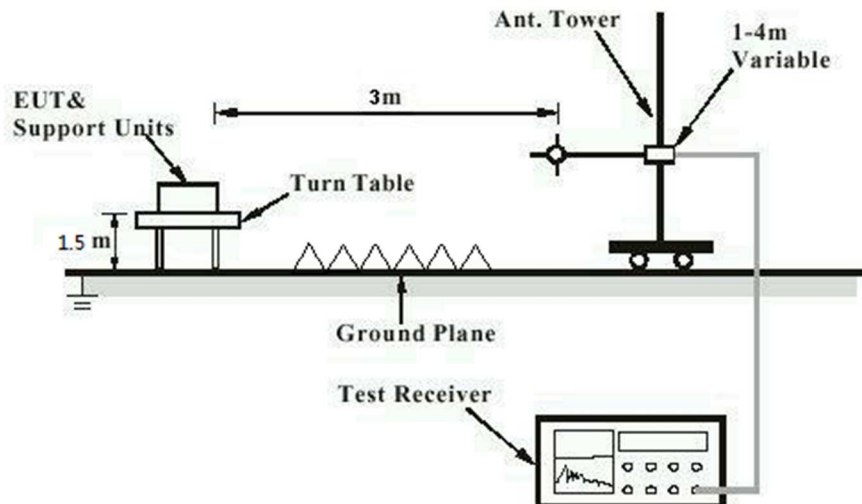


Diagram of Measurement Configuration for Mains Conduction Measurement


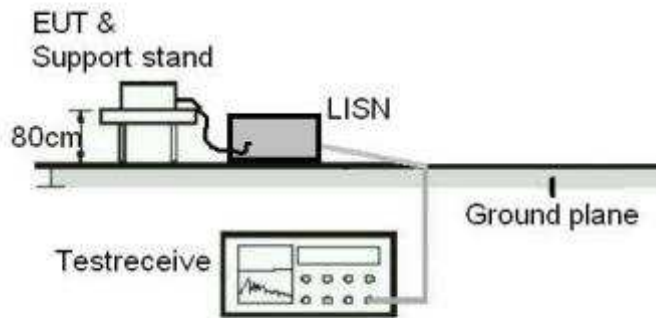


Diagram of Measurement Configuration for Conducted Transmitter Measurement

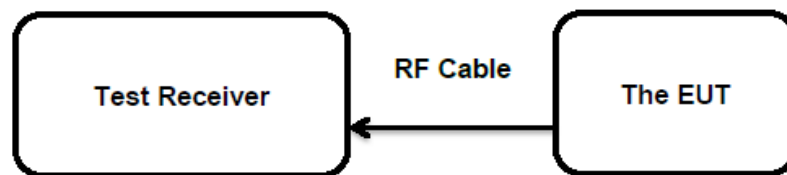

## 5 Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

RESULT:

Pass

**Test Specification**

Test standard : FCC Part 15.247(b)(4) and Part 15.203

According to the manufacturer declared, the EUT has a internal antenna, the directional gain of antenna is -0.5 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

### 5.1.2 Maximum Peak Conducted Output Power

**RESULT:**
**Pass**
**Test Specification**

Test standard : FCC Part 15.247(b)(1), (2) and (3)  
                   : RSS-247 Clause 5.4(a), (b) and (d)  
 Basic standard : ANSI C63.10: 2013  
 Limits : FHSs < 0.25 Watts

Test standard	Technology	Frequency (MHz)	Limit (W)	Channel No.
FCC 15.247	FHSs	902-928	1.0	≥ 50
			0.25	25 ≤ channels < 50
RSS-247	FHSs	902-928	1.0(e.i.r.p.<4.0)	≥ 50
			0.25(e.i.r.p.<1.0)	25 ≤ channels < 50

Kind of test site : Shielded Room

**Test Setup**

Date of testing : 20.12.2019  
 Input voltage : Fully charged battery  
 Operation mode : A  
 Test channel : Low / Middle / High  
 Ambient temperature : 25 °C  
 Relative humidity : 56 %  
 Atmospheric pressure : 101 kPa

For details refer to following test result.

**Table 6: Test Result of Maximum Peak Conducted Output Power**

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
FHSs#2	Low CH	19.11	0.0815	< 1
	Middle CH	19.09	0.0811	
	High CH	18.89	0.0774	
FHSs#6	Low CH	18.44	0.0698	< 1
	Middle CH	18.64	0.0731	
	High CH	18.51	0.0710	

Note:

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G) of FHSs: -0.5 dBi,  
 The Maximum peak conducted output power (e.i.r.p.) =  $P_{(Peak\ power)} + G$ , which is far below the 4 W

### 5.1.3 99% Bandwidth

**RESULT:**
**Pass**
**Test Specification**

Test standard : RSS-Gen Clause 6.7  
 Basic standard : ANSI C63.10: 2013  
 Kind of test site : Shielded Room

**Test Setup**

Date of testing : Refer to test data  
 Input voltage : Fully charged battery  
 Operation mode : A  
 Test channel : Low / Middle / High  
 Ambient temperature : 25 °C  
 Relative humidity : 56 %  
 Atmospheric pressure : 101 kPa

For details refer to following test result.

**Table 7: Test Result of 99% Bandwidth**

Test Mode	Test Channel (MHz)	99% Bandwidth (MHz)	Limit
FHSs#2	Low CH	0.131	/
	Middle CH	0.131	
	High CH	0.131	
FHSs#6	Low CH	0.251	
	Middle CH	0.251	
	High CH	0.250	

For the measurement records, refer to the appendix B.



## 5.1.4 Conducted Spurious Emissions

**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(d) RSS-247 Clause 5.5
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: Refer to test data
Input voltage	: Fully charged battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix B.

## 5.1.5 Radiated Spurious Emission

**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.247(d) & FCC Part 15.205 RSS-247 Clause 3.3
Basic standard	:	ANSI C63.10: 2013
Limits	:	FCC Part 15.209(a) RSS-Gen Table 5
Kind of test site	:	3m Semi-anechoic Chamber

**Test Setup**

Date of testing	:	Refer to test data
Input voltage	:	Fully charged battery
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	22 °C
Relative humidity	:	54 %
Atmospheric pressure	:	101 kPa

**Remark:**

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix B.

### 5.1.6 20dB Bandwidth

**RESULT:**
**Pass**
**Test Specification**

Test standard : FCC Part 15.247(a)(1)(i)  
RSS-247 Clause 5.1(c)

Basic standard : ANSI C63.10: 2013

Limits : < 500KHz

Kind of test site : Shielded Room

**Test Setup**

Date of testing : Refer to test data

Input voltage : Fully charged battery

Operation mode : A

Test channel : Low / Middle / High

Ambient temperature : 25 °C

Relative humidity : 56 %

Atmospheric pressure : 101 kPa

For details refer to following test result.

**Table 8: Test Result of 20dB Bandwidth**

Test Mode	Test Channel (MHz)	20dB Bandwidth (kHz)	Limit
FHSs#2	Low CH	153.69	< 500KHz
	Middle CH	152.82	
	High CH	152.82	
FHSs#6	Low CH	273.70	
	Middle CH	275.70	
	High CH	274.70	

For the measurement records, refer to the appendix B.

### 5.1.7 Carrier Frequency Separation

**RESULT:**
**Pass**
**Test Specification**

Test standard	: FCC Part 15.247(a)(1) RSS-247 Clause 5.1(b)
Basic standard	: ANSI C63.10: 2013
Limits	: $\geq 25\text{kHz}$ or 20dB bandwidth, whichever is greater
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: Refer to test data
Input voltage	: Fully charged battery
Operation mode	: B
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For details refer to following test result.

**Table 9: Test Result of Carrier Frequency Separation**

Test Mode	Test Channel	Measured Channel Separation (KHz)	Limit (kHz)
FHSs#2	Low Channel	199.70	$\geq 153.69$
	Adjacency Channel		
	Middle Channel	199.70	
	Adjacency Channel		
	High Channel	199.70	
	Adjacency Channel		
FHSs#6	Low Channel	499.50	$\geq 275.70$
	Adjacency Channel		
	Middle Channel	499.50	
	Adjacency Channel		
	High Channel	499.50	
	Adjacency Channel		

For the measurement records, refer to the appendix B.

### 5.1.8 Number of Hopping Frequency

**RESULT:****Pass****Test Specification**

Test standard	:	FCC part 15.247(a)(1)(i) RSS-247 Clause 5.1(c)
Basic standard	:	ANSI C63.10: 2013
Limits	:	≥ 50 hopping frequencies for 20dB BW less than 250kHz ≥ 25 hopping frequencies for 20dB BW greater than 250kHz
Kind of test site	:	Shielded Room

**Test Setup**

Date of testing	:	Refer to test data
Input voltage	:	Fully charged battery
Operation mode	:	B
Ambient temperature	:	25 °C
Relative humidity	:	56 %
Atmospheric pressure	:	101 kPa

For details refer to following test result.

**Table 10: Test Result of Number of Hopping Frequency**

Test Mode	Frequency Range	Measured Quantity of Hopping Channel	Limit
FHSs#2	902.2 MHz to 927.8 MHz	129	≥50
FHSs#6	902.5 MHz to 927.5 MHz	51	≥25

For the measurement records, refer to the appendix B.

### 5.1.9 Time of Occupancy

**RESULT:**
**Pass**
**Test Specification**

Test standard : FCC part 15.247(a)(1)(i)  
                   : RSS-247 Clause 5.1(c)  
 Basic standard : ANSI C63.10: 2013  
 Limits : < 0.4s  
 Kind of test site : Shielded Room

**Test Setup**

Date of testing : Refer to test data  
 Input voltage : Fully charged battery  
 Operation mode : B  
 Test channel : Low / Middle / High  
 Ambient temperature : 25 °C  
 Relative humidity : 56 %  
 Atmospheric pressure : 101 kPa

Note:

$$\text{Dwell time} = \text{Pulse width} \times \text{Number of channels in Period}$$

For details refer to following test result.

**Table 11: Test Result of Time of Occupancy**

Test Mode	Test Channel (MHz)	Pulse Width(ms)	Number of Channels	Period (S)	Measured Dwell Time(s)	Limit (s)
FHSs#2	Middle CH	340.0	1	20s	0.340	0.4s
FHSs#6	Middle CH	310.0	1	10s	0.310	0.4s

For the measurement records, refer to the appendix B.

## 6 Safety Human Exposure

### 6.1 Radio Frequency Exposure Compliance

#### 6.1.1 Electromagnetic Fields

**RESULT:**
**Pass**
**Test Specification**

Test standard : CFR47 FCC Part 2: Section 2.1091  
CFR47 FCC Part 1: Section 1.1310  
FCC KDB Publication 447498 v06  
FCC KDB Publication 865664 D01 v01r04  
FCC KDB Publication 865664 D02 v01r02  
RSS-102 Issue 5 March 2015

➤ **FCC requirements**

**FCC requirement:** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 20cm normally can be maintained between the user and the device.

**MPE Calculation Method according to KDB 447498 v06**

Power Density:  $S_{(mW/cm^2)} = PG/4\pi R^2$  or  $EIRP/4\pi R^2$

Where:

S = power density (mW/cm<sup>2</sup>)

P = power input to the antenna (mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (cm)

From the peak RF output power, the minimum mobile separation distance, d=20 cm, as well as the antenna gain (Max -0.5dBi for FHSs), the RF power density can be calculated as below:

$$S_{(mW/cm^2)} = PG/4\pi R^2$$

a) **EUT RF Exposure Evaluation standalone operations**

Test Mode	Measured Peak Power		Antenna Gain (dBi)	Measured e.i.r.p (mW)		$S_{(mW/cm^2)} = PG/4\pi R^2$
	(dBm)	(W)		(dBm)	(W)	
FHSs#2	19.11	0.0815	-0.5	18.61	0.0726	0.0145
FHSs#6	18.64	0.0731	-0.5	18.14	0.0652	0.0130

**Limits for Maximum Permissible Exposure (MPE) according to FCC Part 1.1310:**

1.0 mW/cm<sup>2</sup>

➤ **IC requirements:** The EUT shall comply with the requirement of RSS-102 section 2.5.2.

#### Exemption from Routine Evaluation Limits – RF Exposure Evaluation

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $1.31 \times 10^{-2} f^{0.6834}$  W (adjusted for tune-up tolerance), where  $f$  is in MHz;

- RF exposure evaluation exempted power for FHSs: 1.37 W

#### a) EUT RF Exposure Evaluation standalone operations:

Test Mode	Measured Peak Power		Antenna Gain (dBi)	Measured e.i.r.p (mW)	
	(dBm)	(W)		(dBm)	(W)
FHSs#2	19.11	0.0815	-0.5	18.61	0.0726
FHSs#6	18.64	0.0731	-0.5	18.14	0.0652

The e.i.r.p. for FHSs is less than the RF exposure evaluation exempted power. So RF exposure evaluation is not required.

**“RF Radiation Exposure Statement Caution: This Transmitter must be installed to provide a separation distance of at least 20 cm from all persons.”**



## 7 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

## 8 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Technical Specification of EUT .....	8
Table 3: Operating Frequencies/Channels of EUT .....	10
Table 4: Cables Used during Test .....	11
Table 5: Auxiliary Equipment Used during Test .....	11
Table 6: Test Result of Maximum Peak Conducted Output Power.....	15
Table 7: Test Result of 99% Bandwidth .....	16
Table 8: Test Result of 20dB Bandwidth.....	19
Table 9: Test Result of Carrier Frequency Separation .....	20
Table 10: Test Result of Number of Hopping Frequency .....	21
Table 11: Test Result of Time of Occupancy .....	22