

SAR EVALUATION REPORT

For

Smartisan Technology Co.,Ltd.

Floor 7, Motorola Building, No. 1 WangJing East Road, Chaoyang District

FCC ID: 2AEUYSM801

Report Type: Original Report	Product Type: TD-LTE Digital Mobile Phone
Test Engineer: Rocky Xiao	<i>Rocky Xiao</i>
Report Number: RBJ151019050-20B	
Report Date: 2015-11-10	
Reviewed By: RF Leader	<i>Sula Huang</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Attestation of Test Results			
EUT Information	Company Name	Smartisan Technology Co.,Ltd.	
	EUT Description	TD-LTE Digital Mobile Phone	
	Product Type	SM801	
	FCC ID	2AEUYSM801	
	Serial Number	151019050	
	Test Date	2015-10-26,2015-10-27,2015-10-30,2015-11-1,2015-11-2,2015-11-3	
MODE		Max. SAR Level(s) Reported(W/Kg)	Limit(W/Kg)
GSM 850	1g Head SAR	0.138	1.6
	1g Body SAR	0.583	
PCS 1900	1g Head SAR	0.145	
	1g Body SAR	0.307	
WCDMA Band 5	1g Head SAR	0.133	
	1g Body SAR	0.374	
WCDMA Band 2	1g Head SAR	0.195	
	1g Body SAR	0.393	
CDMA 850	1g Head SAR	0.153	
	1g Body SAR	0.350	
CDMA 1900	1g Head SAR	0.239	
	1g Body SAR	0.292	
LTE Band 2	1g Head SAR	0.209	
	1g Body SAR	0.223	
LTE Band 4	1g Head SAR	0.209	
	1g Body SAR	0.430	
LTE Band 12	1g Head SAR	0.108	
	1g Body SAR	0.18	
LTE Band 17	1g Head SAR	0.109	
	1g Body SAR	0.213	
LTE Band 41	1g Head SAR	0.105	
	1g Body SAR	0.141	
WLAN(2.4G)	1g Head SAR	0.438	
	1g Body SAR	0.328	
5G U-NII Band 1	1g Head SAR	0.368	
	1g Body SAR	0.156	
5G U-NII Band 3	1g Head SAR	0.432	
	1g Body SAR	0.178	
Simultaneous	1g Head SAR	0.666	
	1g Body SAR	0.939	
Hotspot	1g Body SAR	0.939	
Applicable Standards	ANSI / IEEE C95.1 : 2005 IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields,3 kHz to 300 GHz.		
	ANSI / IEEE C95.3 : 2002 IEEE Recommended Practice for Measurements and Computations of Radio Frequency Electromagnetic Fields With Respect to Human Exposure to Such Fields,100 kHz—300 GHz.		
	FCC 47 CFR part 2.1093 Radiofrequency radiation exposure evaluation: portable devices		
	IEEE1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques		
	IEC 62209-2:2010 Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices-Human models, instrumentation, and procedures-Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in		

	close proximity to the human body (frequency range of 30 MHz to 6 GHz)
	<p>KDB procedures KDB 248227 D01 802.11 Wi-Fi SAR v02r02 KDB 447498 D01 General RF Exposure Guidance v06. KDB 648474 D04 Handset SAR v01r03. KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02 KDB 941225 D01 3G SAR Procedures v03r01 KDB 941225 D05 SAR for LTE Devices v02r04 KDB 941225 D06 Hotspot Mode v02r01</p>
<p>Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in ANSI/IEEE Standards and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures.</p> <p>The results and statements contained in this report pertain only to the device(s) evaluated.</p>	

Note: For LTE band 12/17/41 and WLAN(5G) SAR, please refer to the SAR report: RBJ151019050-20A, which was issued by Bay Area Compliance Laboratories Corp. (Shenzhen)

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	5
EUT DESCRIPTION	6
TECHNICAL SPECIFICATION	6
REFERENCE, STANDARDS, AND GUIDELINES	7
SAR LIMITS	8
FACILITIES.....	9
DESCRIPTION OF TEST SYSTEM	10
EQUIPMENT LIST AND CALIBRATION	15
EQUIPMENTS LIST & CALIBRATION INFORMATION	15
SAR MEASUREMENT SYSTEM VERIFICATION	16
LIQUID VERIFICATION	16
SYSTEM ACCURACY VERIFICATION	19
SAR SYSTEM VALIDATION DATA.....	20
EUT TEST STRATEGY AND METHODOLOGY	34
TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON’S EAR.....	34
CHEEK/TOUCH POSITION	35
EAR/TILT POSITION	35
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS.....	36
SAR EVALUATION PROCEDURE.....	37
TEST METHODOLOGY	37
CONDUCTED OUTPUT POWER MEASUREMENT	38
PROVISION APPLICABLE	38
TEST PROCEDURE	38
RADIO CONFIGURATION	38
MAXIMUM TARGET OUTPUT POWER	45
TEST RESULTS:	46
SAR MEASUREMENT RESULTS	60
SAR TEST DATA.....	60
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION	71
SAR PLOTS (SUMMARY OF THE HIGHEST SAR VALUES).....	81
APPENDIX A MEASUREMENT UNCERTAINTY	99
APPENDIX B CALIBRATION CERTIFICATES	101
APPENDIX C EUT TEST POSITION PHOTOS	102

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RBJ151019050-20B	Original Report	2015-11-10

EUT DESCRIPTION

This report has been prepared on behalf of *Smartisan Technology Co.,Ltd.* and their product *TD-LTE Digital Mobile Phone*, Model: *SM801*, FCC ID: 2AEUYSM801 or the EUT (Equipment under Test) as referred to in the rest of this report.

Technical Specification

Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Internal Antenna
Body-Worn Accessories:	Headset
Face-Head Accessories:	None
Operation Mode :	GSM Voice, GPRS/EGPRS class 12, WCDMA R99 (Voice+Data),HSUPA Rel 6,HSDPA Rel 7, DC-HSDPA Rel 8, HSPA+ Rel 6 CDMA 1xRTT, 1xEVDO Rev.0, 1xEVDO Rev.A,1xEVDO Rev.B FDD-LTE,TDD-LTE WLAN(2.4G), WLAN(5G) Bluetooth
Frequency Band:	GSM 850: 824-849 MHz(TX); 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX) WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) CDMA 850(BC0): 824-849 MHz(TX) ; 869-894 MHz(RX) CDMA1900(BC1): 1850-1910 MHz(TX) ; 1930-1990 MHz(RX) LTE Band 2: 1850-1910 MHz(TX) ; 1930-1990 MHz(RX) LTE Band 4: 1710-1785 MHz(TX) ; 2110-2155 MHz(RX) LTE Band 12: 699-716 MHz(TX) ; 729-746 MHz(RX) LTE Band 17: 704-716 MHz(TX) ; 734-746 MHz(RX) LTE Band 41: 2555-2655 MHz(TX/RX) WLAN 2.4 GHz: 2412MHz-2462 MHz WLAN 5 GHz U-NII Band 1: 5150MHz-5250 MHz WLAN 5 GHz U-NII Band 3: 5725MHz-5850 MHz Bluetooth : 2402MHz-2480 MHz
Conducted RF Power:	GSM 850 : 32.94 dBm PCS 1900: 29.8 dBm WCDMA Band 5: 22.68 dBm WCDMA Band 2: 22.87 dBm CDMA BC0:23.94 dBm CDMA BC1:23.2 dBm LTE Band 2:23.09 dBm LTE Band 4: 22.9dBm LTE Band 12:23.16 dBm LTE Band 17:22.77 dBm LTE Band 41: 22.95dBm WLAN (2.4G): 15.66 dBm WLAN (5G) Band 1: 14.66 dBm WLAN(5G) Band 3: 14.83 dBm Bluetooth: 9.11 dBm BLE: 6.73 dBm
Dimensions (L*W*H):	144.55mm (L) x 70.84mm (W) x 7.525mm (H)
Power Source:	3.8 VDC Rechargeable Battery
Normal Operation:	Head and Body-worn

REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

CE:

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

SAR Limits

FCC Limit

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

CE Limit

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 10 g of tissue)	2.0	10
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) & 2 W/kg (CE) applied to the EUT.

FACILITIES

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China


DESCRIPTION OF TEST SYSTEM

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:



DASY5 System Description

The DASY5 system for performing compliance tests consists of the following items:

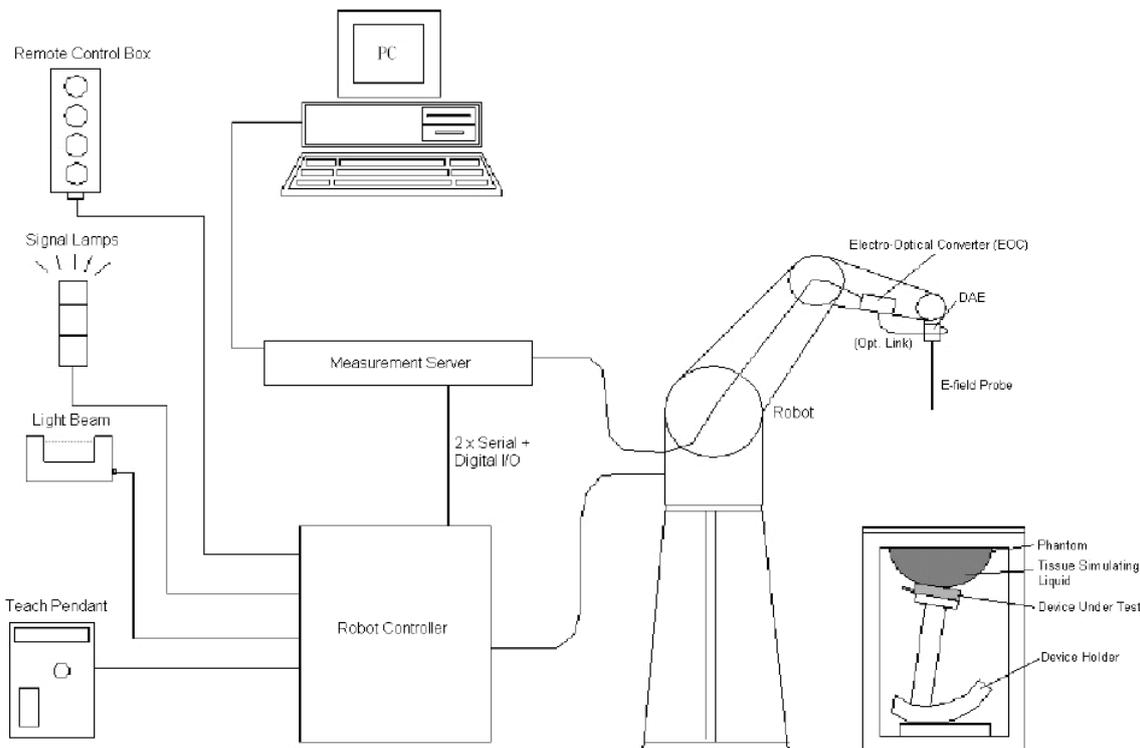

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

DASY5 Measurement Server

The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz Intel ULV Celeron, 128MB chip-disk and 128MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16 bit AD-converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.



The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized point out, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.

Data Acquisition Electronics

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

EX3DV4 E-Field Probes

Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 µW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 µW/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness

increases to 6 mm). The phantom has three measurement areas:

- _ Left hand
- _ Right hand
- _ Flat phantom

The phantom table for the DASY systems based on the TX90XL and RX160L robots have the size of 100 x 50 x 85 cm (L x W x H).

The phantom table for the compact DASY systems based on the RX60L robot have the size of 100 x 75 x 91 cm (L x W x H); these tables are reinforced for mounting of the robot onto the table.

For easy dislocation these tables have fork lift cut outs at the bottom.

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different liquids)

A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.



Robots

The DASY5 system uses the high precision industrial robots TX90XL from Staubli SA (France). The TX robot family is the successor of the well known RX robot family and offers the same features important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The above mentioned robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is contained on the CDs delivered along with the robot. Paper manuals are available upon request direct from Staubli.

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm 2 step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side length of the 10g cube is 21.5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x 7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Recommended Tissue Dielectric Parameters for Head and Body

Frequency (MHz)	Head Tissue		Body Tissue	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00


EQUIPMENT LIST AND CALIBRATION

Equipments List & Calibration Information

Equipment	Model	S/N	Calibration Date	Calibration Due Date
Robot	RX90	D03636	N/A	N/A
DASY5 Test Software	DASY52.8	N/A	N/A	N/A
DASY5 Measurement Server	DASY5 4.5.12	1470	N/A	N/A
Data Acquisition Electronics	DAE4	1459	2015/9/18	2016/9/18
E-Field Probe	EX3DV4	7329	2015/2/5	2016/2/5
Dipole, 835MHz	D835V1	453	2015/8/17	2018/8/17
Dipole, 1750 MHz	D1750V2	1141	2015/7/9	2018/7/9
Dipole, 1900MHz	D1900V2	5d206	2015/7/14	2018/7/14
Dipole, 2450MHz	D2450V3	971	2015/7/8	2018/7/8
R&S, universal Radio Communication Tester	CMU200	105047	2014/11/20	2015/11/20
8960 Series 10 Wireless Communication Test Set	E5515C	MY50266471	2015-01-13	2016-01-13
Wideband Radio Communication Tester	CMW500	1201.0002K50-146520-wh	2014/11/19	2015/11/19
Mounting Device	MD4HHTV5	SD 000 H01 KA	N/A	N/A
Twin SAM	Twin SAM V5.0	1874	N/A	N/A
Simulated Tissue 835 MHz Head	TS-835-H	201504	Each Time	/
Simulated Tissue 835 MHz Body	TS-835-B	201505	Each Time	/
Simulated Tissue 1750 MHz Head	TS-1750-H	201508	Each Time	/
Simulated Tissue 1750 MHz Body	TS-1750-B	201509	Each Time	/
Simulated Tissue 1900 MHz Head	TS-1900-H	201506	Each Time	/
Simulated Tissue 1900 MHz Body	TS-1900-B	201507	Each Time	/
Simulated Tissue 2450 MHz Head	TS-2450-H	201512	Each Time	/
Simulated Tissue 2450 MHz Body	TS-2450-B	201513	Each Time	/
Network Analyzer	8752C	3140A02356	2015/6/3	2016/6/3
Dielectric probe kit	85070B	US33020324	2015/6/13	2016/6/13
Signal Generator	E4422B	MY41000355	2015/10/27	2016/10/27
Power Meter	EPM-441A	GB37481494	2015/11/3	2016/11/3
Power Meter Sensor	8481A	T-03-EM-127	2015/11/3	2016/11/3
Power Amplifier	5205PE	1015	N/A	N/A
Directional Coupler	488Z	N/A	N/A	N/A
Attenuator	20dB, 100W	N/A	N/A	N/A

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

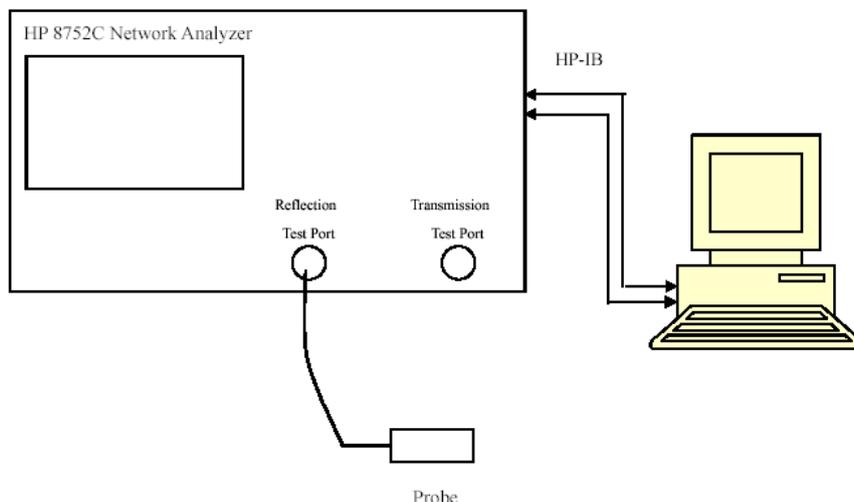

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
824.2	Head	42.93	0.878	41.5	0.9	3.45	-2.44	± 5
	Body	55.152	0.963	55.2	0.97	-0.09	-0.72	± 5
826.4	Head	42.895	0.88	41.5	0.9	3.36	-2.22	± 5
	Body	55.142	0.965	55.2	0.97	-0.11	-0.52	± 5
836.6	Head	42.881	0.891	41.5	0.9	3.33	-1	± 5
	Body	55.099	0.976	55.2	0.97	-0.18	0.62	± 5
846.6	Head	42.824	0.895	41.5	0.9	3.19	-0.56	± 5
	Body	55.017	0.985	55.2	0.97	-0.33	1.55	± 5
848.8	Head	42.707	0.895	41.5	0.9	2.91	-0.56	± 5
	Body	55.012	0.987	55.2	0.97	-0.34	1.75	± 5
2412	Head	39.35	1.796	39.2	1.8	0.38	-0.22	± 5
	Body	53.23	1.945	52.7	1.95	1.01	-0.26	± 5
2437	Head	39.18	1.819	39.2	1.8	-0.05	1.06	± 5
	Body	51.625	1.979	52.7	1.95	-2.04	1.49	± 5
2462	Head	39.003	1.843	39.2	1.8	-0.5	2.39	± 5
	Body	52.202	1.98	52.7	1.95	-0.94	1.54	± 5

*Liquid Verification above was performed on 2015/10/26

Frequency	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1850.2	Head	39.854	1.359	40	1.4	-0.37	-2.93	±5
	Body	55.261	1.479	53.3	1.52	3.68	-2.7	±5
1852.4	Head	39.867	1.357	40	1.4	-0.33	-3.07	±5
	Body	55.209	1.476	53.3	1.52	3.58	-2.89	±5
1880	Head	39.725	1.384	40	1.4	-0.69	-1.14	±5
	Body	53.725	1.541	53.3	1.52	0.8	1.38	±5
1907.6	Head	39.572	1.412	40	1.4	-1.07	0.86	±5
	Body	53.587	1.492	53.3	1.52	0.54	-1.84	±5
1909.8	Head	39.611	1.414	40	1.4	-0.97	1	±5
	Body	53.374	1.492	53.3	1.52	0.14	-1.84	±5

*Liquid Verification above was performed on 2015/10/27.

Frequency	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1860	Head	39.811	1.37	40	1.4	-0.47	-2.14	±5
	Body	54.456	1.466	53.3	1.52	2.17	-3.55	±5
1880	Head	39.739	1.386	40	1.4	-0.65	-1	±5
	Body	53.748	1.541	53.3	1.52	0.84	1.38	±5
1900	Head	39.676	1.411	40	1.4	-0.81	0.79	±5
	Body	54.193	1.512	53.3	1.52	1.68	-0.53	±5

*Liquid Verification above was performed on 2015/10/30.

Frequency	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1720	Head	40.444	1.368	40.8	1.37	-0.87	-0.15	±5
	Body	53.473	1.472	53.43	1.49	0.08	-1.21	±5
1732.5	Head	40.413	1.379	40.8	1.37	-0.95	0.66	±5
	Body	53.421	1.481	53.43	1.49	-0.02	-0.6	±5
1745	Head	40.33	1.383	40.8	1.37	-1.15	0.95	±5
	Body	53.292	1.488	53.43	1.49	-0.26	-0.13	±5

*Liquid Verification above was performed on 2015/11/1.

Frequency	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
824.7	Head	42.953	0.878	41.5	0.9	3.5	-2.44	±5
	Body	55.144	0.962	55.2	0.97	-0.1	-0.82	±5
836.52	Head	42.874	0.892	41.5	0.9	3.31	-0.89	±5
	Body	55.129	0.975	55.2	0.97	-0.13	0.52	±5
848.31	Head	42.749	0.897	41.5	0.9	3.01	-0.33	±5
	Body	54.986	0.988	55.2	0.97	-0.39	1.86	±5

*Liquid Verification above was performed on 2015/11/2.


Frequency	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1851.25	Head	39.868	1.358	40	1.4	-0.33	-3	± 5
	Body	55.351	1.479	53.3	1.52	3.85	-2.7	± 5
1880	Head	39.762	1.385	40	1.4	-0.59	-1.07	± 5
	Body	53.73	1.542	53.3	1.52	0.81	1.45	± 5
1908.75	Head	39.563	1.414	40	1.4	-1.09	1	± 5
	Body	53.488	1.49	53.3	1.52	0.35	-1.97	± 5

*Liquid Verification above was performed on 2015/11/3.

System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

System Verification Setup Block Diagram

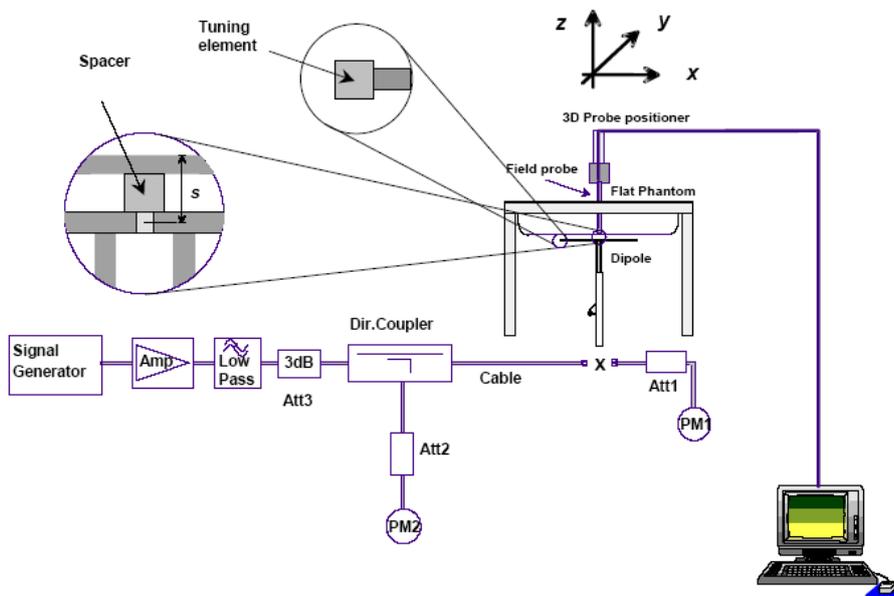

System Accuracy Check Results

Date	Frequency Band	Liquid Type	Measured SAR (W/Kg)	Target Value	Delta (%)	Tolerance (%)
2015/10/26	835	Head	1g 9.52	9.43	0.95	± 10
		Body	1g 9.41	9.55	-1.47	± 10
	2450	Head	1g 54.5	53.3	2.25	± 10
		Body	1g 52.8	50.6	4.35	± 10
2015/10/27	1900	Head	1g 39.5	40.7	-2.95	± 10
		Body	1g 41.8	40.8	2.45	± 10
2015/10/30	1900	Head	1g 38.1	40.7	-6.39	± 10
		Body	1g 40	40.8	-1.96	± 10
2015/11/1	1750	Head	1g 39.9	36.8	8.42	± 10
		Body	1g 35.7	37.4	-4.55	± 10
2015/11/2	835	Head	1g 9.82	9.43	4.14	± 10
		Body	1g 9.28	9.55	-2.83	± 10
2015/11/3	1900	Head	1g 40.4	40.7	-0.74	± 10
		Body	1g 41.6	40.8	1.96	± 10

*All SAR values are normalized to 1 Watt forward power.

SAR SYSTEM VALIDATION DATA

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

System Performance 835 MHz Head Test Date:2015/10/26

DUT:D835V1; Type: 835 MHz; Serial:453

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.893 \text{ S/m}$; $\epsilon_r = 42.937$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.52, 9.52, 9.52); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

System Performance 835 MHz Head /Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 10.5 W/kg


System Performance 835 MHz Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 108.6 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 15.7 W/kg

SAR(1 g) = 9.52 W/kg; SAR(10 g) = 6.28 W/kg

Maximum value of SAR (measured) = 11.2 W/kg

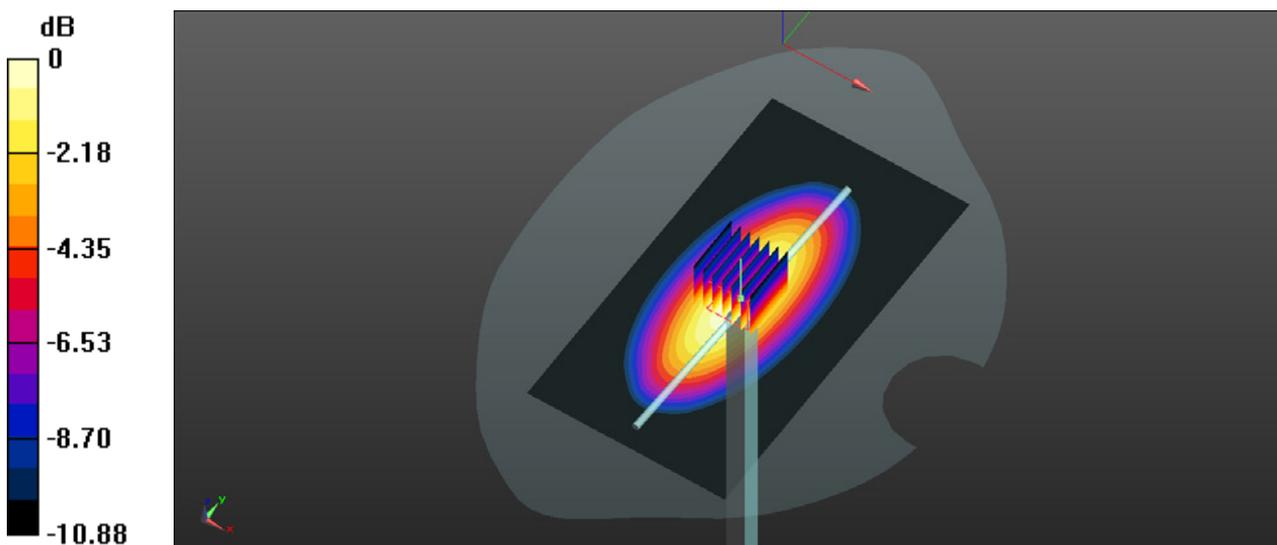

0 dB = 11.2W/kg = 10.49 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

System Performance 835 MHz Body Test Date:2015/10/26

DUT:D835V1; Type: 835 MHz; Serial:453

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.973 \text{ S/m}$; $\epsilon_r = 55.097$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.17, 9.17, 9.17); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

System Performance 835 MHz Body /Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 10.7 W/kg


System Performance 835 MHz Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 107.9 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 15.4 W/kg

SAR(1 g) = 9.41 W/kg; SAR(10 g) = 6.26 W/kg

Maximum value of SAR (measured) = 10.9 W/kg

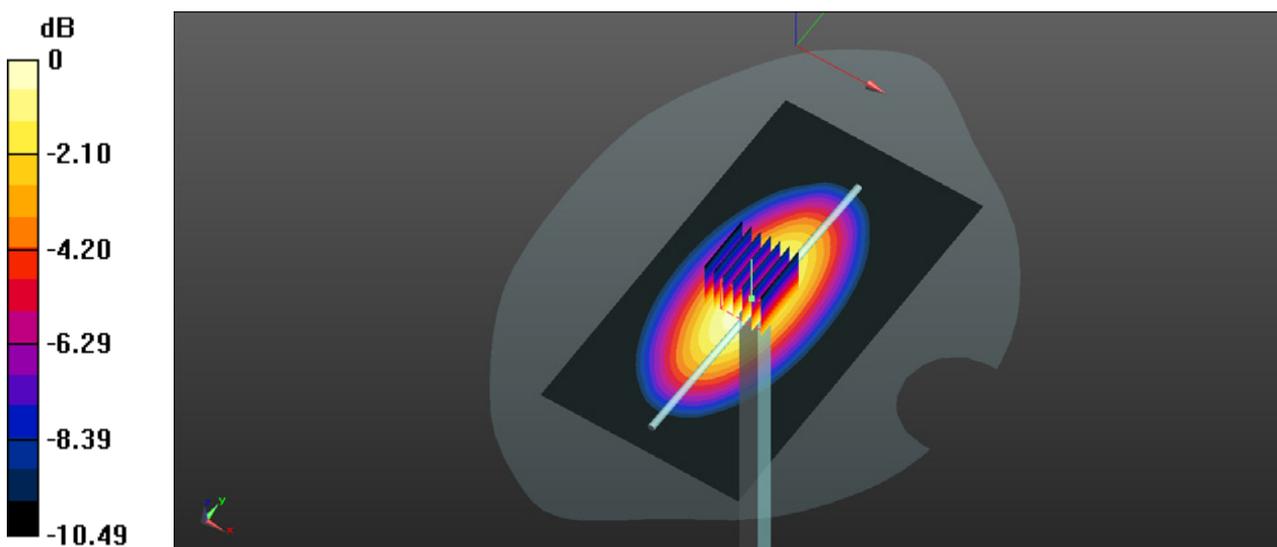

0 dB = 10.9 W/kg = 10.37 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

System Performance 835 MHz Head Test Date:2015/11/02

DUT:D835V1; Type: 835 MHz; Serial:453

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.892 \text{ S/m}$; $\epsilon_r = 42.956$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.52, 9.52, 9.52); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

System Performance 835MHz Head /Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 10.7W/kg


System Performance 835MHz Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 107.5 V/m; Power Drift = 0.09dB

Peak SAR (extrapolated) = 15.3 W/kg

SAR(1 g) = 9.82 W/kg; SAR(10 g) = 6.32 W/kg

Maximum value of SAR (measured) = 10.8 W/kg

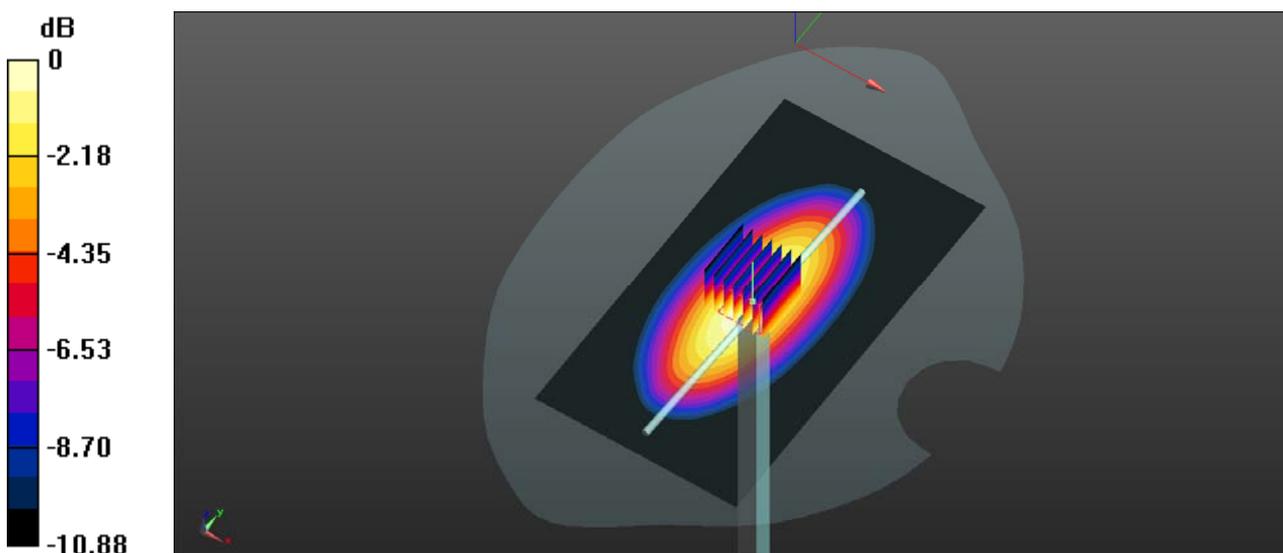

0 dB = 10.8 W/kg = 10.33 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

System Performance 835 MHz Body Test Date:2015/11/02

DUT: D835V1; Type: 835 MHz; Serial: 453

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.974 \text{ S/m}$; $\epsilon_r = 55.079$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.17, 9.17, 9.17); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

System Performance 835 MHz Body /Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 9.96 W/kg


System Performance 835 MHz Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 99.49 V/m; Power Drift = 0.04B

Peak SAR (extrapolated) = 14.2 W/kg

SAR(1 g) = 9.28 W/kg; SAR(10 g) = 6.09 W/kg

Maximum value of SAR (measured) = 10.1 W/kg

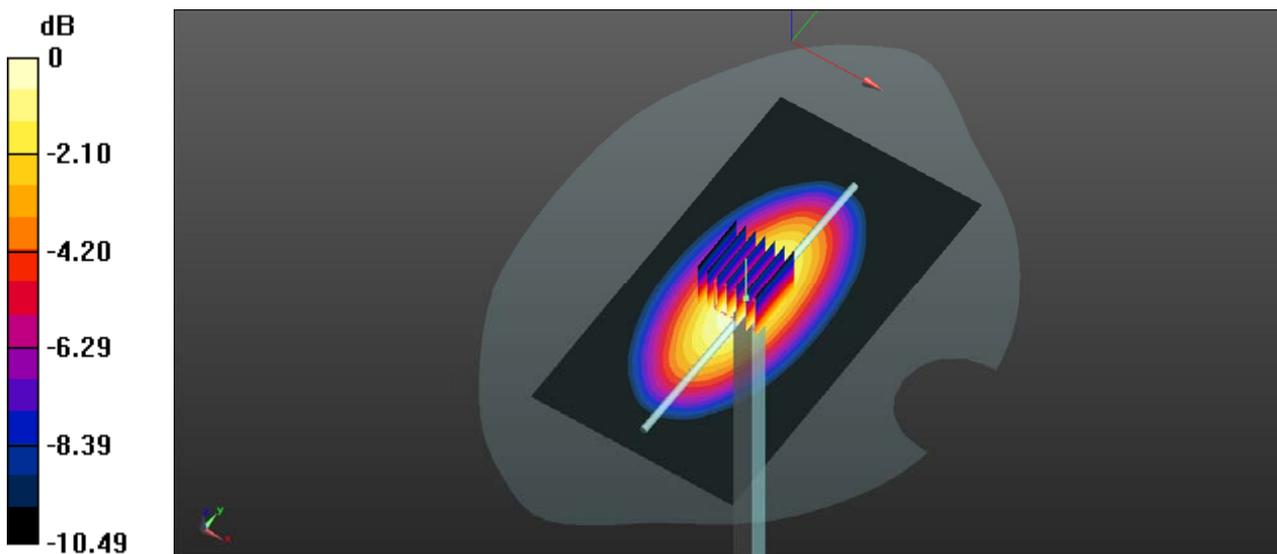

0 dB = 10.1 W/kg = 10.04 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

System Performance 1750 MHz Head Test Date:2015/11/01

DUT: D1750V2; Type: 1750 MHz; Serial: 1141

Communication System: CW; Frequency: 1750 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1750$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.12, 8.12, 8.12); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

System Performance 1750 MHz Head /Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 45.6 W/kg


System Performance 1750 MHz Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 162.5 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 72.8 W/kg

SAR(1 g) = 39.9 W/kg; SAR(10 g) = 21.3 W/kg

Maximum value of SAR (measured) = 45.1 W/kg

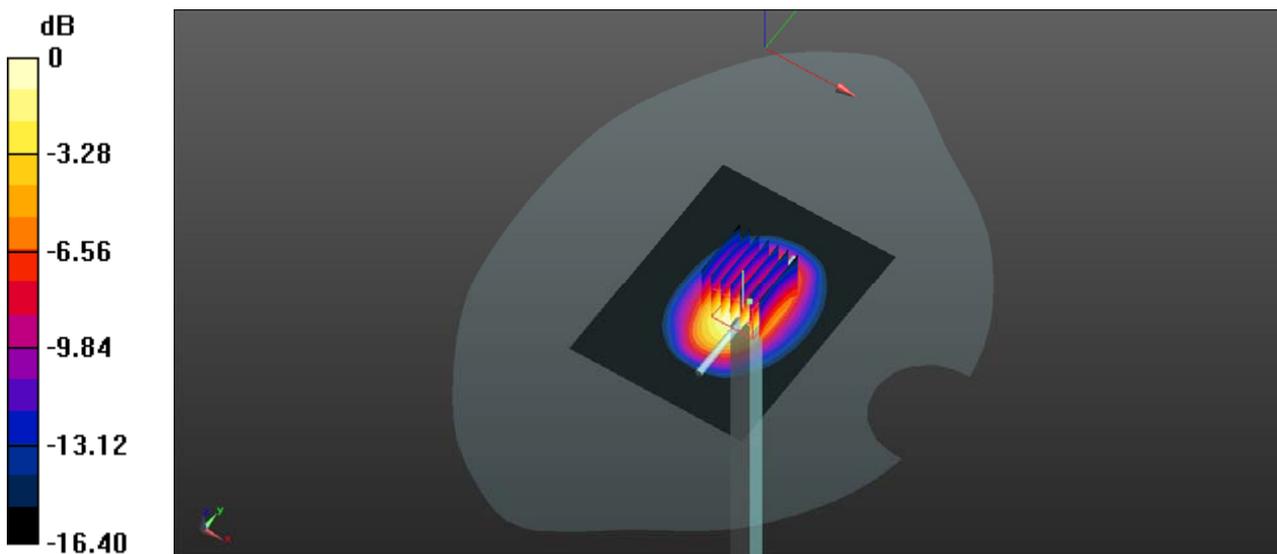

0 dB = 45.1 W/kg = 16.54 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

System Performance 1750 MHz Body Test Date:2015/11/01

DUT: D1750V2; Type: 1750 MHz; Serial: 1141

Communication System: CW; Frequency: 1750 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1750$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 53.351$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.85, 7.85, 7.85); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

System Performance 1750 MHz Body /Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 41.7 W/kg


System Performance 1750 MHz Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 162.4 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 65.9 W/kg

SAR(1 g) = 35.7 W/kg; SAR(10 g) = 18.8 W/kg

Maximum value of SAR (measured) = 39.6 W/kg

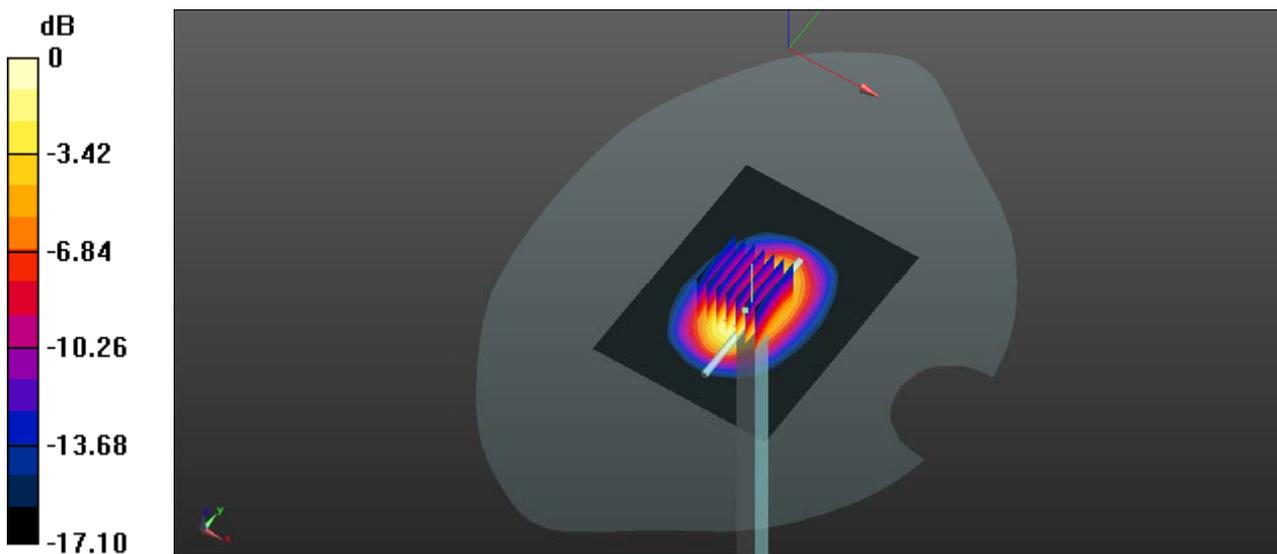

0 dB = 39.6 W/kg = 15.98 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

System Performance 1900 MHz Head Test Date:2015/10/27

DUT: D1900V2; Type: 1900 MHz; Serial: 5d206

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 39.657$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.88, 7.88, 7.88); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

System Performance 1900 MHz Head /Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 46.9 W/kg


System Performance 1900 MHz Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 174.7V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 74.2 W/kg

SAR(1 g) = 39.5 W/kg; SAR(10 g) = 20.6W/kg

Maximum value of SAR (measured) = 44.5 W/kg

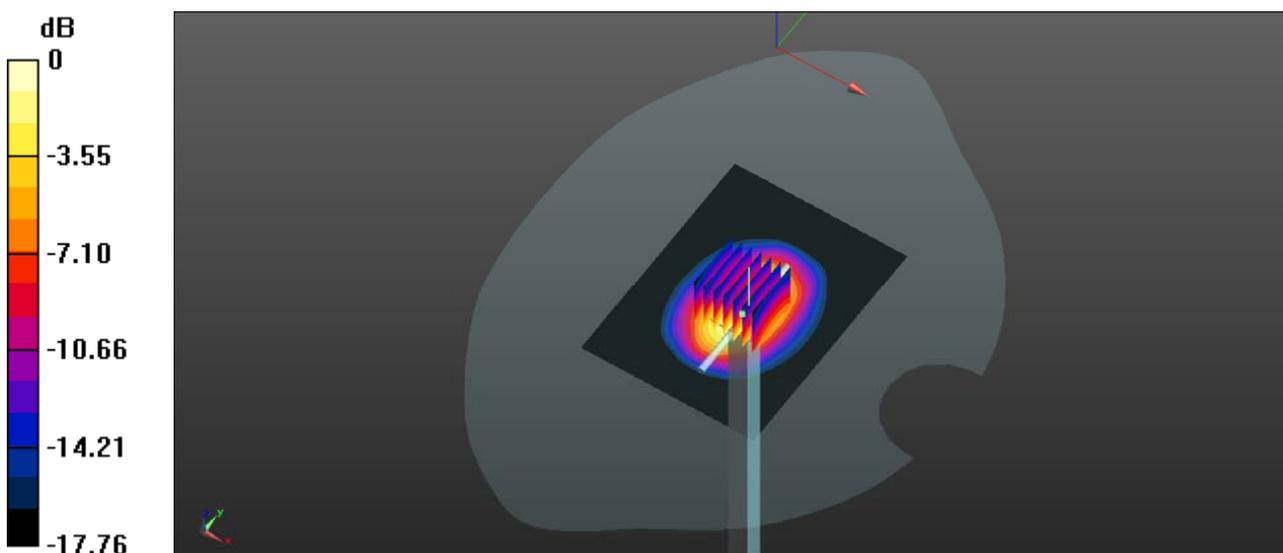

0 dB = 44.5 W/kg = 16.48 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

System Performance 1900 MHz Body Test Date:2015/10/27

DUT: D1900V2; Type: 1900 MHz; Serial: 5d206

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.514 \text{ S/m}$; $\epsilon_r = 54.211$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 7.56, 7.56); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

System Performance 1900 MHz Body /Area Scan (61x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 48.8W/kg


System Performance 1900 MHz Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 171.9 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 79.2 W/kg

SAR(1 g) = 41.8 W/kg; SAR(10 g) = 22 W/kg

Maximum value of SAR (measured) = 47.2W/kg

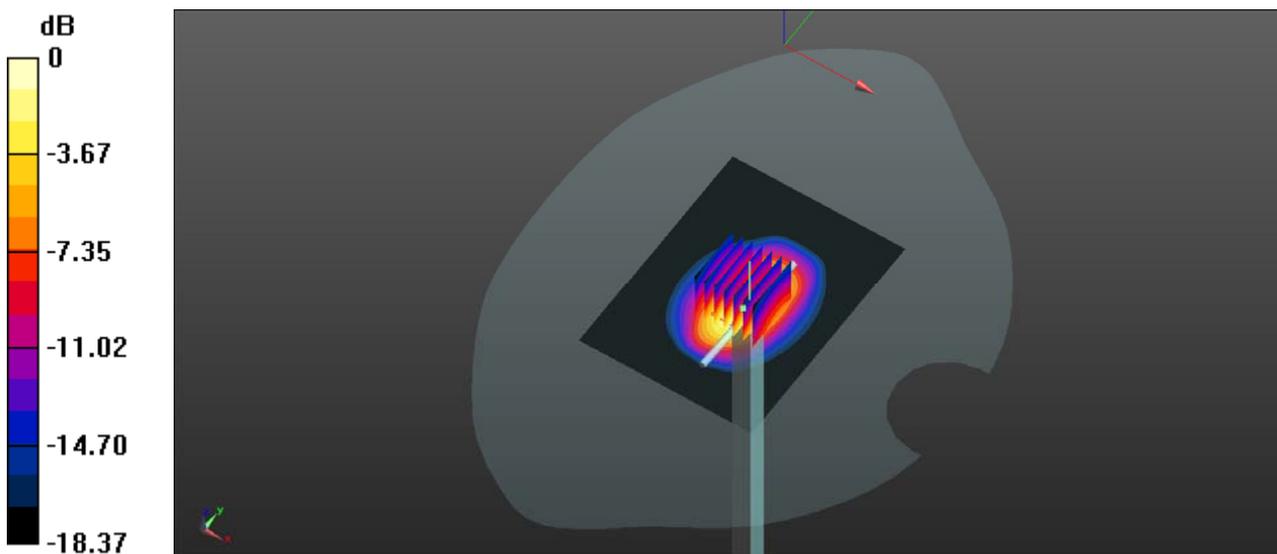

0 dB = 47.2 W/kg = 16.73 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

System Performance 1900 MHz Head Test Date:2015/10/30

DUT: D1900V2; Type: 1900 MHz; Serial: 5d206

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.411 \text{ S/m}$; $\epsilon_r = 39.676$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.88, 7.88, 7.88); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

System Performance 1900 MHz Head /Area Scan (61x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 44.9W/kg


System Performance 1900 MHz Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 168.5 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 71.3 W/kg

SAR(1 g) = 38.1 W/kg; SAR(10 g) = 19.7 W/kg

Maximum value of SAR (measured) = 42.6 W/kg

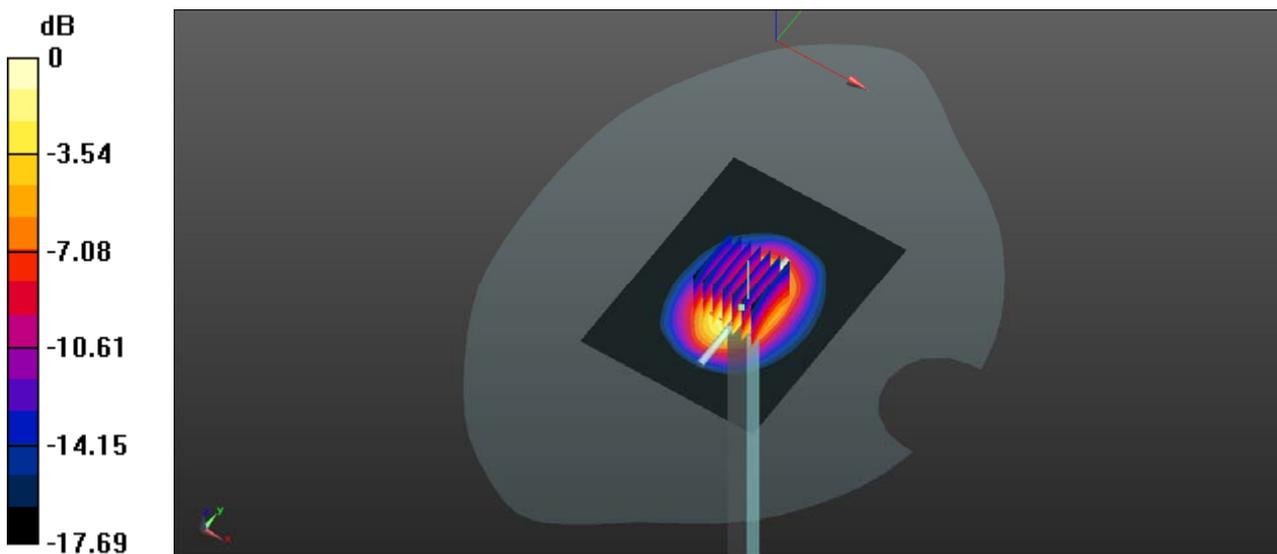

0 dB = 42.6 W/kg = 16.29 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

System Performance 1900 MHz Body Test Date:2015/10/30

DUT: D1900V2; Type: 1900 MHz; Serial: 5d206

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.512 \text{ S/m}$; $\epsilon_r = 54.193$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 7.56, 7.56); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

System Performance 1900 MHz Body /Area Scan (61x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 47.5 W/kg


System Performance 1900 MHz Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 163.6 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 74.2 W/kg

SAR(1 g) = 40W/kg; SAR(10 g) = 19.9 W/kg

Maximum value of SAR (measured) = 43.8W/kg

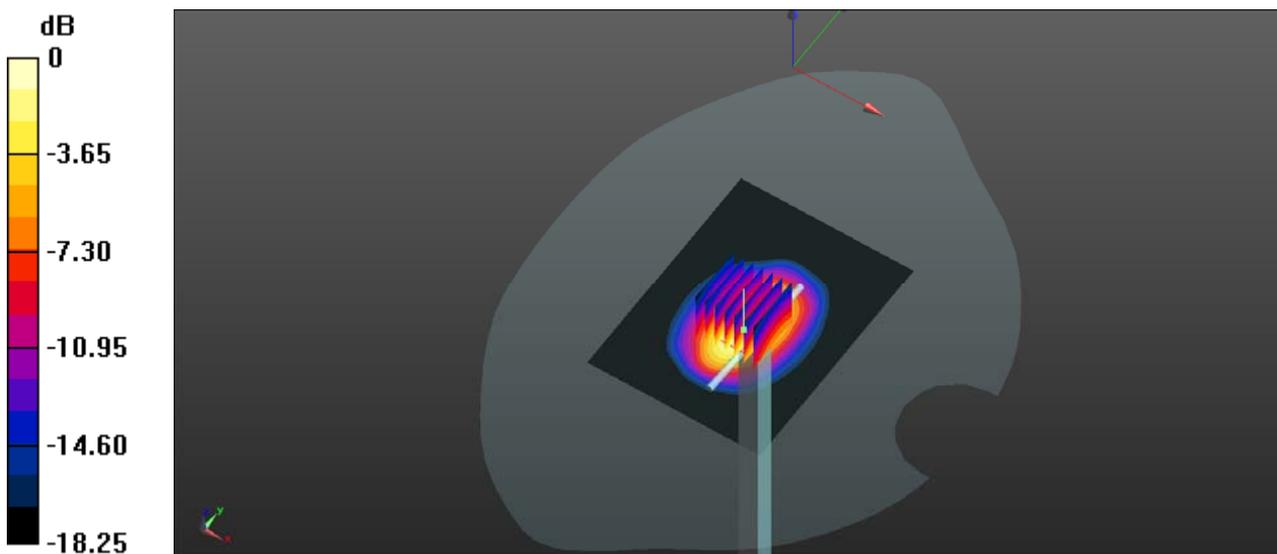

0 dB = 43.8 W/kg = 16.41 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

System Performance 1900 MHz Head Test Date:2015/11/03

DUT: D1900V2; Type: 1900 MHz; Serial: 5d206

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.411 \text{ S/m}$; $\epsilon_r = 39.688$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.88, 7.88, 7.88); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

System Performance 1900 MHz Head /Area Scan (61x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 46.7 W/kg


System Performance 1900 MHz Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 168.8 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 72.9 W/kg

SAR(1 g) = 40.4 W/kg; SAR(10 g) = 21.1 W/kg

Maximum value of SAR (measured) = 45.3 W/kg

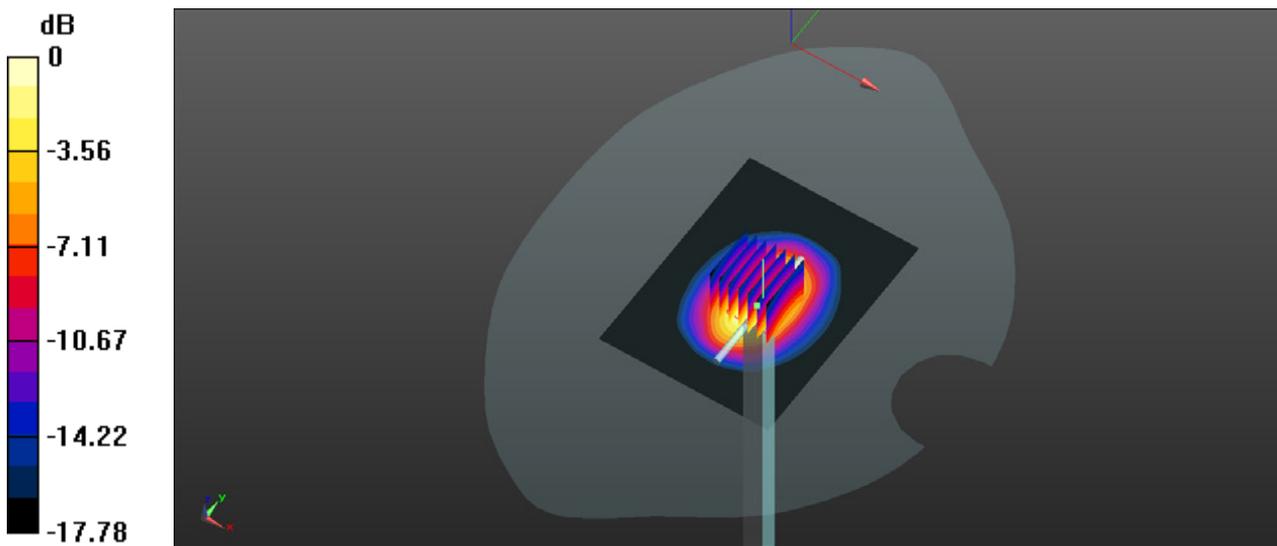

0 dB = 45.3 W/kg = 16.56 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

System Performance 1900 MHz Body Test Date:2015/11/03

DUT: D1900V2; Type: 1900 MHz; Serial: 5d206

Communication System: CW; Frequency: 1900 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.516 \text{ S/m}$; $\epsilon_r = 54.189$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 7.56, 7.56); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

System Performance 1900 MHz Body /Area Scan (61x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 49.4 W/kg


System Performance 1900 MHz Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 173.9 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 78.9W/kg

SAR(1 g) = 41.6 W/kg; SAR(10 g) = 21.2 W/kg

Maximum value of SAR (measured) = 47.4 W/kg

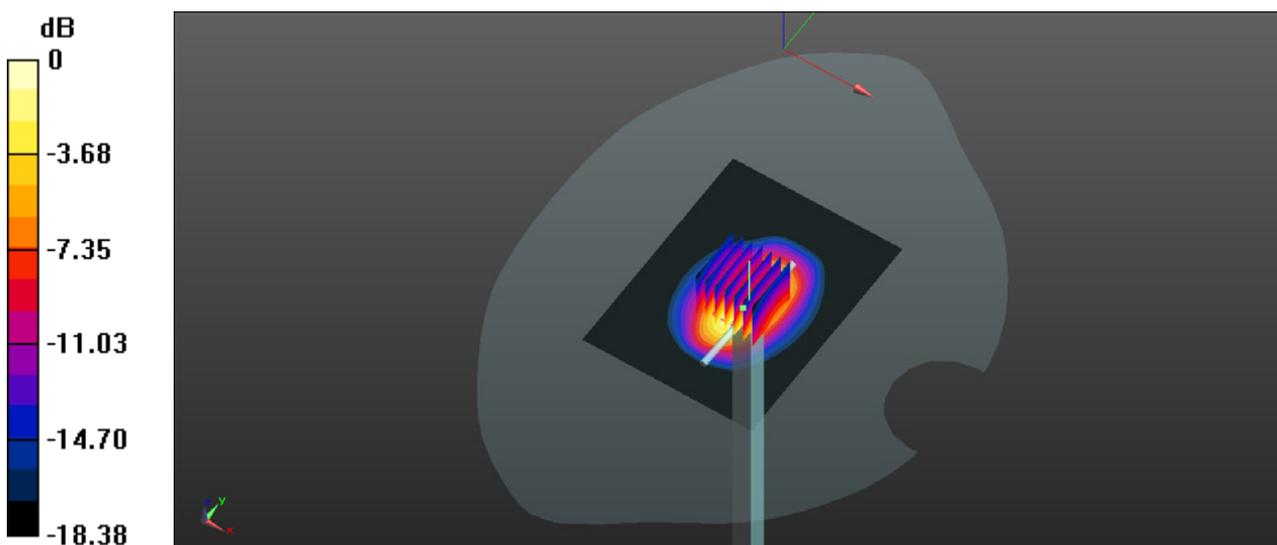

0 dB = 47.4 W/kg = 16.76 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

System Performance 2450 MHz Head Test Date:2015/10/26

DUT: D2450V3; Type: 2450 MHz; Serial: 971

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.827 \text{ S/m}$; $\epsilon_r = 39.108$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.06, 7.06, 7.06); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

System Performance 2450 MHz Head /Area Scan (61x81x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 65.3 W/kg


System Performance 2450 MHz Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 189.4 V/m; Power Drift = -0.02dB

Peak SAR (extrapolated) = 114 W/kg

SAR(1 g) = 54.5 W/kg; SAR(10 g) = 24.9W/kg

Maximum value of SAR (measured) = 62.1W/kg

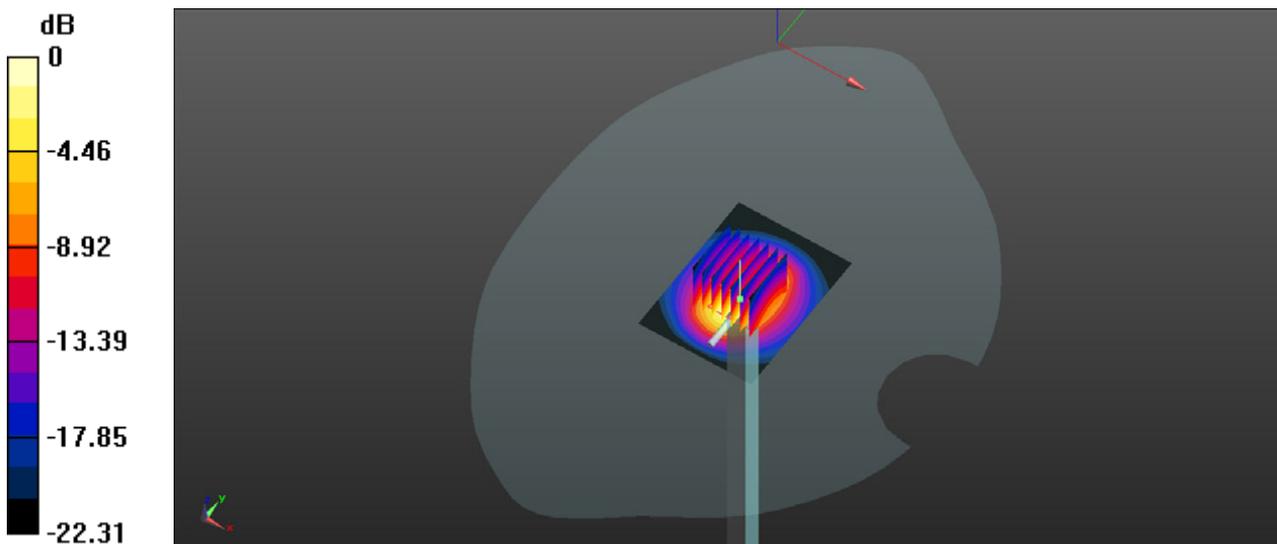

0 dB = 62.1 W/kg = 17.93 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

System Performance 2450 MHz Body Test Date:2015/10/26

DUT: D2450V3; Type: 2450 MHz; Serial: 971

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 2.027 \text{ S/m}$; $\epsilon_r = 52.211$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.2, 7.2, 7.2); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

System Performance 2450 MHz Body /Area Scan (61x81x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 64.2 W/kg


System Performance 2450 MHz Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 182.9 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 110 W/kg

SAR(1 g) = 52.8 W/kg; SAR(10 g) = 24.4W/kg

Maximum value of SAR (measured) = 60.3 W/kg

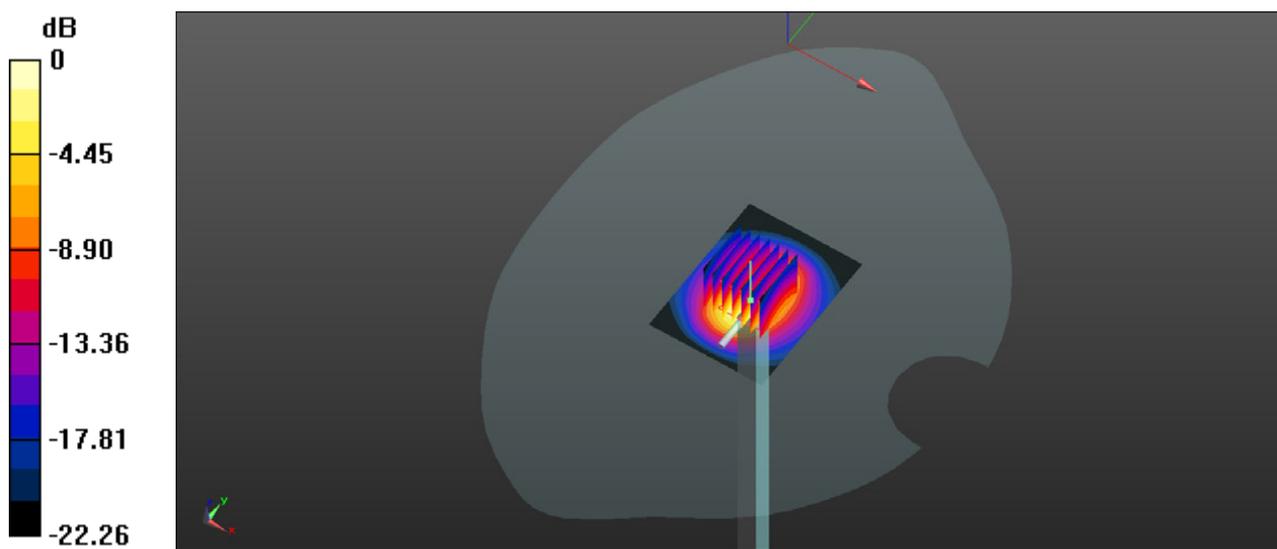


0 dB = 60.3 W/kg = 17.80 dBW/kg

EUT TEST STRATEGY AND METHODOLOGY

Test Positions for Device Operating Next to a Person’s Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point”. The “test device reference point” should be located at the same level as the center of the earpiece region. The “vertical centerline” should bisect the front surface of the handset at its top and bottom edges. A “ear reference point” is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the “phantom reference plane” defined by the three lines joining the center of each “ear reference point” (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the “N-F” line defined along the base of the ear spacer that contains the “ear reference point”. For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The “test device reference point” is aligned to the “ear reference point” on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”. This is called the “initial ear position”. While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

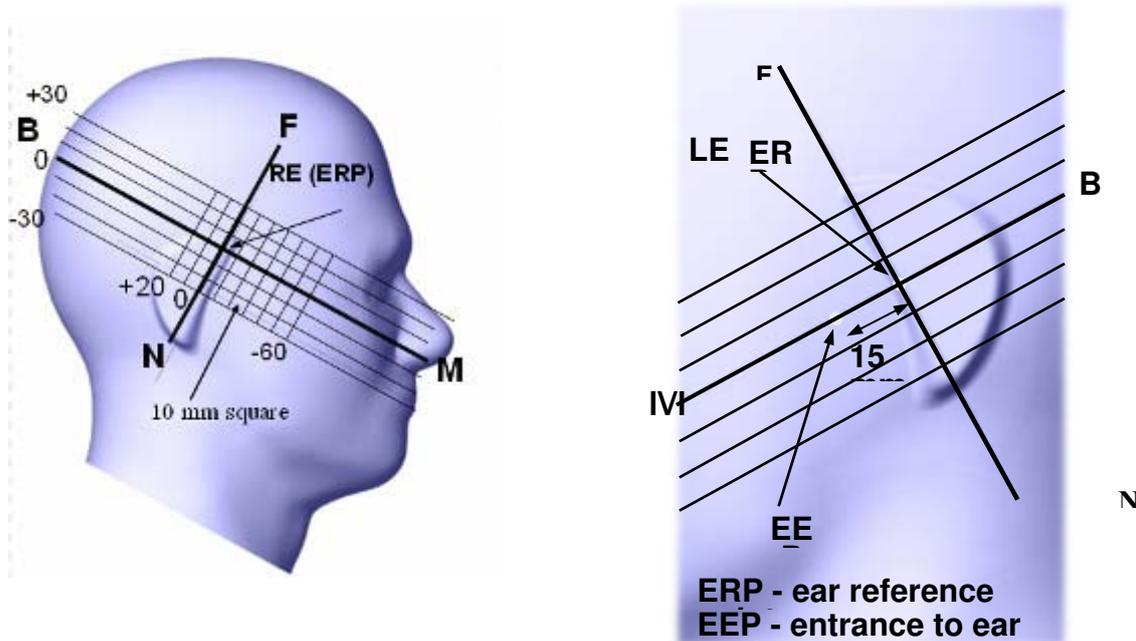

Cheek/Touch Position

The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line for the SCC-34/SC-2 head phantom.


This test position is established:

When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.

(or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek /Touch Position

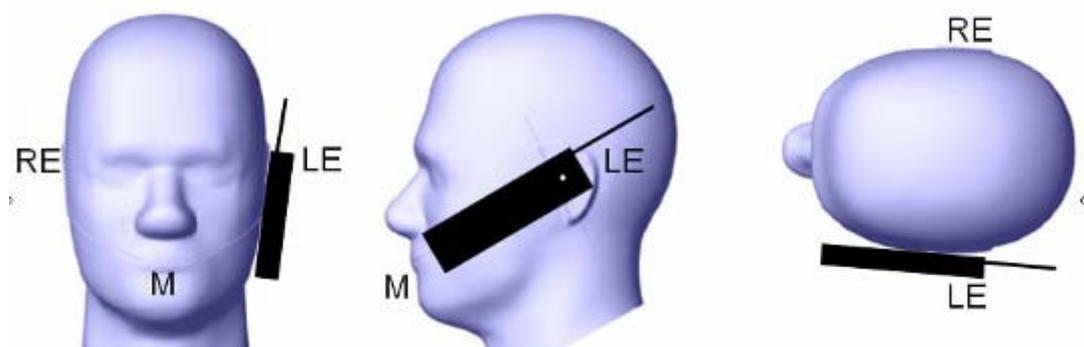

Ear/Tilt Position


With the handset aligned in the “Cheek/Touch Position”:

1) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.

2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15° to 80° . After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tilt/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

Ear /Tilt 15° Position

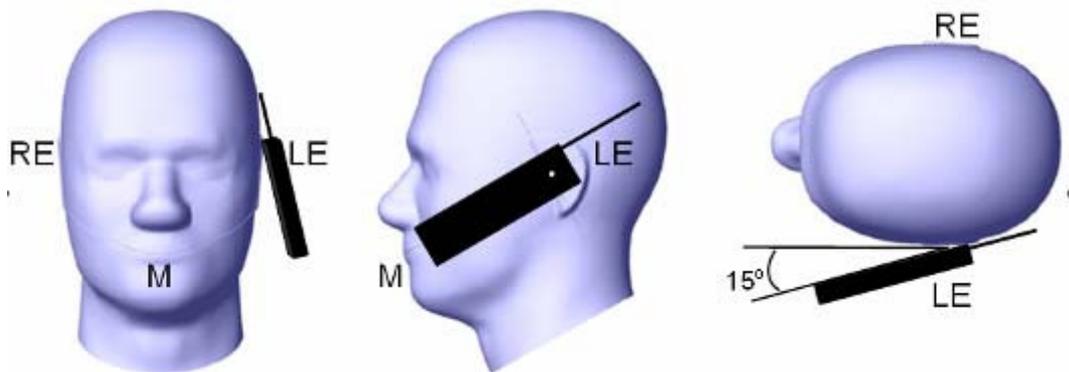

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

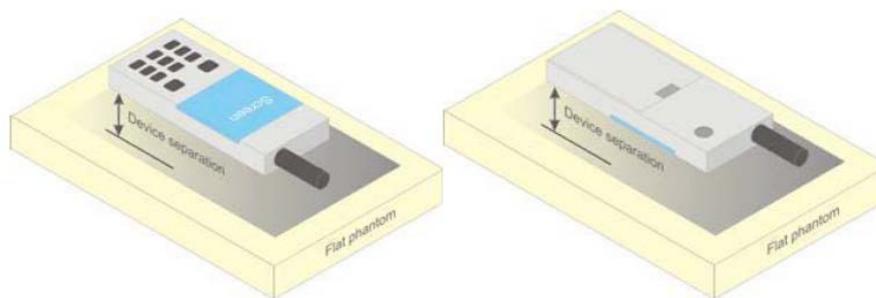


Figure 5 – Test positions for body-worn devices

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

Test methodology

KDB 248227 D01 802.11 Wi-Fi SAR v02r02
KDB 447498 D01 General RF Exposure Guidance v06.
KDB 648474 D04 Handset SAR v01r03.
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02 RF Exposure Reporting v01r02
KDB 941225 D01 3G SAR Procedures v03r01
KDB 941225 D05 SAR for LTE Devices v02r04
KDB 941225 D06 Hotspot Mode v02r01


CONDUCTED OUTPUT POWER MEASUREMENT

Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

Test Procedure

The RF output of the transmitter was connected to the input of the EMI Test Receiver through sufficient attenuation.

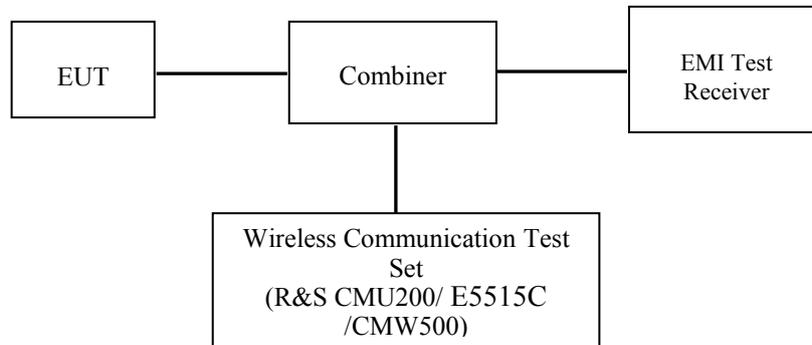

GSM/WCDMA/CDMA/LTE

Radio Configuration

The power measurement was configured by the Wireless Communication Test Set.

GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900
 Press Connection control to choose the different menus
 Press RESET > choose all the reset all settings
 Connection Press Signal Off to turn off the signal and change settings
 Network Support > GSM + GPRS or GSM + EGSM
 Main Service > Packet Data
 Service selection > Test Mode A – Auto Slot Config. off
 MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting
 > Slot configuration > Uplink/Gamma
 > 33 dBm for GPRS 850
 > 30 dBm for GPRS 1900
 > 27 dBm for EGPRS 850
 > 26 dBm for EGPRS 1900
 BS Signal channel Enter the same channel number for TCH channel (test channel) and BCCH
 Frequency Offset > + 0 Hz
 Mode > BCCH and TCH
 BCCH Level > -85 dBm (May need to adjust if link is not stable)
 BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]
 Channel Type > Off
 P0 > 4 dB
 Slot Config > Unchanged (if already set under MS signal)
 TCH > choose desired test channel
 Hopping > Off
 Main Timeslot > 3
 Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)
 Bit Stream > 2E9-1 PSR Bit Stream
 AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
 Connection Press Signal on to turn on the signal and change settings

WCDMA Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	$\beta_d(SF)$	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
MPR(dB)	0	0	0.5	0.5	
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{cc}	209/225	12/15	30/15	2/15	5/15
	β_c / β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
MPR(dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs} = \beta_{hs} / \beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCIs	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	

HSPA+

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

DC-HSDPA

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
<p>Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.</p> <p>Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.</p>		

CDMA 1x RTT

Maximum output power is verified on the high, middle and low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. Steps 3 and 4 are measured using Loopback Service Option SO55 with power control bits in “All Up” condition. Step 10 is measured using TDSO/SO32 with power control bits in the “Bits Hold” condition (i.e. alternative Up/Down Bits).

Table 4.4.5.2-1. Test Parameters for Maximum RF Output Power with a Single Traffic Code Channel, Spreading Rate 1

Parameter	Units	Value
\bar{I}_{or}	dBm/1.23 MHz	-104
$\frac{\text{Pilot } E_c}{I_{or}}$	dB	-7
$\frac{\text{Traffic } E_c}{I_{or}}$	dB	-7.4

Table 4.4.5.2-2. Test Parameters for Maximum RF Output Power with Multiple Traffic Code Channels, Spreading Rate 1

Parameter	Units	Value
$\frac{\text{Pilot } E_c}{I_{or}}$	dB	-7
$\frac{\text{Traffic } E_c}{I_{or}}$	dB	-7.4

EVDO

Maximum output power is verified on the high, middle and low channels according to procedures in section 3.1.2.3.4 of 3GPP2 C.S0033-0/TIA-866 for Rev. 0, section 4.3.4 of 3GPP2 C.S0033-A for Rev. A.

Maximum output power is measured for Rev. 0 and Rev. A in Subtype 0/1 and Subtype 2 Physical Layer configurations, respectively.

LTE(FDD)

For UE Power Class 1 and 3, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

For UE Power Class 1 and 3 the specific requirements and identified sub clauses are specified in Table 6.2.4-1 along with the allowed A-MPR values that may be used to meet these requirements. The allowed A-MPR values specified below in Table 6.2.4-1 to 6.2.4-15 are in addition to the allowed MPR requirements specified in sub clause 6.2.3.

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
NS_04	6.6.2.2.2	41	20	>10	≤ 1
			5	>6	≤ 1
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9 Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2 6.6.2.2.1 6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
...					
NS_32	-	-	-	-	-

LTE(TDD):

LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink				Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS		
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	
1	$19760 \cdot T_s$			$20480 \cdot T_s$			
2	$21952 \cdot T_s$			$23040 \cdot T_s$			
3	$24144 \cdot T_s$			$25600 \cdot T_s$			
4	$26336 \cdot T_s$			$7680 \cdot T_s$			
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	
6	$19760 \cdot T_s$			$23040 \cdot T_s$			
7	$21952 \cdot T_s$			$12800 \cdot T_s$			
8	$24144 \cdot T_s$			-			
9	$13168 \cdot T_s$			-			

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink x (T_s) x # of S + # of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

T_s = 1/(15000 x 2048) seconds

Maximum Target Output Power

Max Target Power(dBm)			
Mode/Band	Channel		
	Low	Middle	High
GSM 850	33	33	33
GPRS 1 TX Slot	32.8	32.8	32.8
GPRS 2 TX Slot	31.8	31.8	31.8
GPRS 3 TX Slot	30.3	30.3	30.3
GPRS 4 TX Slot	29.3	29.3	29.3
EDGE 1 TX Slot	26.3	26.3	26.3
EDGE 2 TX Slot	25.3	25.3	25.3
EDGE 3 TX Slot	22.9	22.9	22.9
EDGE 4 TX Slot	21.3	21.3	21.3
PCS 1900	29.9	29.9	29.9
GPRS 1 TX Slot	29.4	29.4	29.4
GPRS 2 TX Slot	28	28	28
GPRS 3 TX Slot	26.5	26.5	26.5
GPRS 4 TX Slot	25.1	25.1	25.1
EDGE 1 TX Slot	25.4	25.4	25.4
EDGE 2 TX Slot	23.9	23.9	23.9
EDGE 3 TX Slot	22.4	22.4	22.4
EDGE 4 TX Slot	21.1	21.1	21.1
WCDMA Band 5	22.8	22.8	22.8
HSDPA	21.7	21.7	21.7
HSUPA	21.7	21.7	21.7
DC-HSDPA	21.7	21.7	21.7
HSPA+	21.5	21.5	21.5
WCDMA Band 2	23	23	23
HSDPA	21.8	21.8	21.8
HSUPA	21.9	21.9	21.9
DC-HSDPA	21.7	21.7	21.7
HSPA+	21.6	21.6	21.6
CDMA 850	24	24	24
CDMA1900	23.3	23.3	23.3
LTE Band 2	23.2	23.2	23.2
LTE Band 4	23	23	23
LTE Band 12	23.2	23.2	23.2
LTE Band 17	22.9	22.9	22.9
LTE Band 41	23	23	23
WLAN(2.4G)	15.8	15.8	15.8
WLAN(5G)	15	15	15
Bluetooth BDR/EDR	4.0	9.2	8.0
Bluetooth LE	3.0	6.8	6.0

Test Results:

GSM:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)
GSM 850	128	824.2	32.77
	190	836.6	32.94
	251	848.8	32.69
PCS 1900	512	1850.2	29.41
	661	1880	29.49
	810	1909.8	29.80

GPRS:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	32.66	31.66	30.23	29.17
	190	836.6	32.19	31.20	29.67	28.67
	251	848.8	32.49	31.47	29.80	28.86
PCS 1900	512	1850.2	28.85	27.49	26.09	24.37
	661	1880	28.82	27.59	26.02	24.40
	810	1909.8	29.30	27.94	26.40	24.97

EGPRS:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	26.24	24.86	22.41	20.94
	190	836.6	25.74	25.20	22.83	21.17
	251	848.8	26.21	24.83	22.54	21.10
PCS 1900	512	1850.2	25.23	23.73	22.18	20.88
	661	1880	24.67	23.24	21.84	20.50
	810	1909.8	25.34	23.79	22.34	20.97

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

The time based average power for GPRS

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	23.66	25.66	25.98	26.17
	190	836.6	23.19	25.2	25.42	25.67
	251	848.8	23.49	25.47	25.55	25.86
PCS 1900	512	1850.2	19.85	21.49	21.84	21.37
	661	1880	19.82	21.59	21.77	21.4
	810	1909.8	20.3	21.94	22.15	21.97

The time based average power for EGPRS

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	17.24	18.86	18.16	17.94
	190	836.6	16.74	19.2	18.58	18.17
	251	848.8	17.21	18.83	18.29	18.1
PCS 1900	512	1850.2	16.23	17.73	17.93	17.88
	661	1880	15.67	17.24	17.59	17.5
	810	1909.8	16.34	17.79	18.09	17.97

Note:

1. Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GSM peak and average output power for active timeslots.
2. For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
3. For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).

**WCDMA:
Results (12.2kbps RMC)**

Band	Frequency (MHz)	RF Output Power (dBm)
WCDMA Band 5	826.4	22.41
	836.6	22.55
	846.6	22.68
WCDMA Band 2	1852.4	22.65
	1880	22.87
	1907.6	22.69

Results (HSDPA)

Band	Frequency (MHz)	RF Output Power (dBm)			
		Subset 1	Subset 2	Subset 3	Subset 4
WCDMA Band 5	826.4	21.37	21.31	21.43	21.4
	836.6	21.62	21.62	21.57	21.57
	846.6	21.46	21.41	21.49	21.54
WCDMA Band 2	1852.4	21.41	21.38	21.41	21.47
	1880	21.7	21.66	21.62	21.71
	1907.6	21.53	21.6	21.56	21.65

Results (HSUPA)

Band	Frequency (MHz)	RF Output Power (dBm)				
		Subset 1	Subset 2	Subset 3	Subset 4	Subset 5
WCDMA Band 5	826.4	21.5	21.43	21.41	21.37	21.32
	836.6	21.64	21.64	21.55	21.62	21.56
	846.6	21.6	21.58	21.54	21.45	21.5
WCDMA Band 2	1852.4	21.56	21.49	21.49	21.46	21.46
	1880	21.83	21.74	21.73	21.78	21.71
	1907.6	21.7	21.61	21.63	21.51	21.59

Results (DC-HSDPA):

Band	Frequency (MHz)	RF Output Power (dBm)			
		Subset 1	Subset 2	Subset 3	Subset 4
WCDMA Band 5	826.4	21.35	21.27	21.23	21.28
	836.6	21.6	21.51	21.47	21.48
	846.6	21.38	21.35	21.39	21.33
WCDMA Band 2	1852.4	21.42	21.33	21.39	21.37
	1880	21.6	21.57	21.58	21.54
	1907.6	21.48	21.51	21.45	21.47

Results (HSPA+)

Band	Frequency (MHz)	RF Output Power (dBm)
WCDMA Band 5	826.4	21.19
	836.6	21.39
	846.6	21.27
WCDMA Band 2	1852.4	21.32
	1880	21.45
	1907.6	21.4

Note:

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/HSPA+/DC-HSDPA when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

CDMA 2000:

Band	Channel No.	CDMA 1x RTT					EVDO	
		Frequency (MHz)	RC1+SO55	RC3+SO55	RC3+SO32 (FCH)	RC3+SO32 (SCH)	RTAP 153.6kbps Subtype 0	RETAP 4096pbs Subtype 2
BC0	1013	824.7	23.83	23.74	23.27	23.6	23.71	23.61
	384	836.52	23.76	23.77	23.66	23.63	23.64	23.63
	777	848.31	23.94	23.71	23.74	23.37	23.83	23.57
BC1	25	1851.25	22.87	22.92	22.95	23.2	22.73	22.8
	600	1880	22.98	22.89	22.82	22.88	22.84	22.76
	1175	1908.75	22.85	22.82	22.83	22.62	22.74	22.68

LTE Band 2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	0	0	22.53	22.61	22.41
		1#3	0	0	22.62	22.59	22.41
		1#5	0	0	22.63	22.58	22.33
		3#0	1	1	22.14	22.59	21.72
		3#1	1	1	22.03	22.50	21.81
		3#3	1	1	21.87	22.54	21.82
		6#0	1	1	21.17	21.46	21.13
	16-QAM	1#0	1	1	22.22	22.36	21.91
		1#3	1	1	22.41	22.18	21.75
		1#5	1	1	22.31	22.36	21.65
		3#0	2	2	21.71	22.40	21.32
		3#1	2	2	21.46	22.39	21.58
		3#3	2	2	21.68	22.30	21.53
		6#0	2	2	20.90	20.57	20.95
3M	QPSK	1#0	0	0	22.36	22.15	22.43
		1#7	0	0	22.31	22.35	22.08
		1#14	0	0	22.22	22.31	21.92
		8#0	1	1	21.92	21.89	21.80
		8#4	1	1	21.85	21.93	21.80
		8#7	1	1	21.73	21.71	21.65
		15#0	1	1	20.89	20.93	20.85
	16-QAM	1#0	1	1	22.26	21.82	21.77
		1#7	1	1	22.30	21.73	21.58
		1#14	1	1	22.30	21.67	21.74
		8#0	2	2	21.53	21.36	21.35
		8#4	2	2	21.80	21.11	21.31
		8#7	2	2	21.52	21.46	21.47
		15#0	2	2	20.78	20.77	20.59

5M	QPSK	1#0	0	0	22.77	22.08	22.45
		1#12	0	0	22.56	21.94	21.95
		1#24	0	0	22.37	19.98	22.11
		12#0	1	1	21.45	21.45	21.44
		12#6	1	1	21.74	21.24	21.67
		12#11	1	1	21.43	21.22	21.44
		25#0	1	1	20.78	20.77	20.70
	16-QAM	1#0	1	1	21.67	21.36	21.73
		1#12	1	1	21.71	21.19	21.61
		1#24	1	1	21.05	21.06	21.71
		12#0	2	2	21.46	21.20	21.00
		12#6	2	2	21.26	21.34	21.04
		12#11	2	2	21.27	20.84	20.99
		25#0	2	2	20.55	20.54	20.39
10M	QPSK	1#0	0	0	22.38	22.03	22.03
		1#24	0	0	22.65	21.88	21.98
		1#49	0	0	22.22	22.02	22.15
		25#0	1	1	21.74	21.43	21.36
		25#12	1	1	21.88	21.41	21.53
		25#24	1	1	21.75	21.37	21.57
		50#0	1	1	21.25	20.76	20.74
	16-QAM	1#0	1	1	22.20	21.88	21.65
		1#24	1	1	22.01	21.78	21.70
		1#49	1	1	20.97	21.53	21.53
		25#0	2	2	21.54	21.34	20.93
		25#12	2	2	21.39	21.45	21.07
		25#24	2	2	20.48	20.60	20.99
		50#0	2	2	20.42	20.24	20.05
15M	QPSK	1#0	0	0	22.15	22.19	22.24
		1#37	0	0	22.15	22.29	22.26
		1#74	0	0	21.98	22.16	22.44
		36#0	1	1	21.69	21.71	21.72
		36#17	1	1	21.61	21.82	21.71
		36#35	1	1	21.36	21.80	21.90
		75#0	1	1	21.40	20.68	20.74
	16-QAM	1#0	1	1	22.03	21.56	21.72
		1#37	1	1	22.01	21.28	21.45
		1#74	1	1	21.90	21.23	21.60
		36#0	2	2	21.31	20.32	20.69
		36#17	2	2	21.44	20.72	20.86
		36#35	2	2	21.35	20.57	20.78
		75#0	2	2	20.57	20.08	19.91

20M	QPSK	1#0	0	0	22.11	21.72	21.93
		1#49	0	0	22.25	21.90	22.27
		1#99	0	0	22.20	22.11	23.09
		50#0	1	1	21.52	21.12	21.73
		50#24	1	1	21.35	21.24	21.86
		50#49	1	1	21.56	21.49	21.55
		100#0	1	1	21.36	20.69	20.74
	16-QAM	1#0	1	1	21.79	21.66	21.81
		1#49	1	1	22.00	21.49	21.68
		1#99	1	1	21.83	21.49	21.87
		50#0	2	2	21.21	20.80	20.90
		50#24	2	2	21.14	21.02	20.99
		50#49	2	2	21.08	20.94	20.84
		100#0	2	2	20.14	20.33	20.31

LTE Band 4:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	0	0	22.34	22.42	22.22
		1#3	0	0	22.43	22.40	22.22
		1#5	0	0	22.46	22.41	22.16
		3#0	1	1	21.97	22.42	21.55
		3#1	1	1	21.86	22.33	21.64
		3#3	1	1	21.64	22.31	21.59
		6#0	1	1	21.00	21.29	20.96
	16-QAM	1#0	1	1	21.99	22.13	21.68
		1#3	1	1	22.21	21.98	21.55
		1#5	1	1	22.11	22.16	21.45
		3#0	2	2	21.49	22.18	21.10
		3#1	2	2	21.25	22.18	21.37
		3#3	2	2	21.49	22.11	21.34
		6#0	2	2	20.69	20.36	20.74
3M	QPSK	1#0	0	0	22.15	21.94	22.22
		1#7	0	0	22.11	22.15	21.88
		1#14	0	0	22.05	22.14	21.75
		8#0	1	1	21.71	21.68	21.59
		8#4	1	1	21.65	21.73	21.60
		8#7	1	1	21.51	21.49	21.43
		15#0	1	1	20.72	20.76	20.68
	16-QAM	1#0	1	1	22.05	21.61	21.56
		1#7	1	1	22.12	21.55	21.40
		1#14	1	1	22.10	21.47	21.54
		8#0	2	2	21.33	21.16	21.15
		8#4	2	2	21.60	20.91	21.11
		8#7	2	2	21.33	21.27	21.28
		15#0	2	2	20.58	20.57	20.39

5M	QPSK	1#0	0	0	22.57	21.88	22.25
		1#12	0	0	22.38	21.76	21.77
		1#24	0	0	22.16	19.77	21.90
		12#0	1	1	21.24	21.24	21.23
		12#6	1	1	21.56	21.06	21.49
		12#11	1	1	21.23	21.02	21.24
		25#0	1	1	20.59	20.58	20.51
	16-QAM	1#0	1	1	21.44	21.13	21.50
		1#12	1	1	21.55	21.03	21.45
		1#24	1	1	20.87	20.88	21.53
		12#0	2	2	21.24	20.98	20.78
		12#6	2	2	21.07	21.15	20.85
		12#11	2	2	21.05	20.62	20.77
		25#0	2	2	20.38	20.37	20.22
10M	QPSK	1#0	0	0	22.15	21.80	21.80
		1#24	0	0	22.47	21.70	21.80
		1#49	0	0	21.99	21.79	21.92
		25#0	1	1	21.53	21.22	21.15
		25#12	1	1	21.72	21.25	21.37
		25#24	1	1	21.54	21.16	21.36
		50#0	1	1	21.06	20.57	20.55
	16-QAM	1#0	1	1	22.00	21.68	21.45
		1#24	1	1	21.83	21.60	21.52
		1#49	1	1	20.81	21.37	21.37
		25#0	2	2	21.35	21.15	20.74
		25#12	2	2	21.14	21.20	20.82
		25#24	2	2	20.24	20.36	20.75
		50#0	2	2	20.23	20.05	19.86
15M	QPSK	1#0	0	0	21.97	22.01	22.06
		1#37	0	0	21.93	22.07	22.04
		1#74	0	0	21.82	22.00	22.28
		36#0	1	1	21.47	21.49	21.50
		36#17	1	1	21.42	21.63	21.52
		36#35	1	1	21.19	21.63	21.73
		75#0	1	1	21.20	20.48	20.54
	16-QAM	1#0	1	1	21.81	21.34	21.50
		1#37	1	1	21.81	21.08	21.25
		1#74	1	1	21.70	21.03	21.40
		36#0	2	2	21.11	20.12	20.49
		36#17	2	2	21.26	20.54	20.68
		36#35	2	2	21.17	20.39	20.60
		75#0	2	2	20.39	19.90	19.73

20M	QPSK	1#0	0	0	21.92	21.53	21.74
		1#49	0	0	22.05	21.70	22.07
		1#99	0	0	22.01	21.92	22.90
		50#0	1	1	21.35	20.95	21.56
		50#24	1	1	21.16	21.05	21.86
		50#49	1	1	21.35	21.28	21.34
		100#0	1	1	21.15	20.48	20.53
	16-QAM	1#0	1	1	21.57	21.44	21.59
		1#49	1	1	21.78	21.27	21.46
		1#99	1	1	21.63	21.29	21.67
		50#0	2	2	21.01	20.60	20.70
		50#24	2	2	20.93	20.81	20.78
		50#49	2	2	20.85	20.71	20.61
		100#0	2	2	19.96	20.15	20.13

LTE Band 12:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	0	0	23.16	22.96	22.93
		1#3	0	0	23.11	23.02	22.89
		1#5	0	0	22.88	23.05	22.79
		3#0	1	1	22.35	22.10	22.37
		3#1	1	1	22.42	22.42	21.88
		3#3	1	1	22.24	22.35	22.16
		6#0	1	1	21.80	21.84	21.63
	16-QAM	1#0	1	1	22.39	22.43	22.35
		1#3	1	1	22.44	22.33	22.02
		1#5	1	1	22.26	22.62	22.08
		3#0	2	2	21.67	21.39	21.43
		3#1	2	2	21.23	21.29	21.18
		3#3	2	2	21.36	21.54	21.15
		6#0	2	2	21.79	20.71	20.68
3M	QPSK	1#0	0	0	22.92	23.05	22.66
		1#7	0	0	22.82	22.81	22.62
		1#14	0	0	22.76	22.98	22.81
		8#0	1	1	22.77	22.44	21.82
		8#4	1	1	22.57	22.35	22.17
		8#7	1	1	22.44	22.34	22.00
		15#0	1	1	21.83	22.00	21.43
	16-QAM	1#0	1	1	22.42	22.23	22.26
		1#7	1	1	22.08	22.43	22.38
		1#14	1	1	22.27	22.44	22.18
		8#0	2	2	21.41	21.60	21.07
		8#4	2	2	21.47	21.26	21.00
		8#7	2	2	21.50	21.36	21.01
		15#0	2	2	20.60	20.83	20.51

5M	QPSK	1#0	0	0	23.00	22.86	22.71
		1#12	0	0	23.04	22.70	22.52
		1#24	0	0	22.93	22.71	22.85
		12#0	1	1	22.28	22.41	21.99
		12#6	1	1	22.53	22.15	22.14
		12#11	1	1	22.27	22.23	21.95
		25#0	1	1	21.76	21.70	21.40
	16-QAM	1#0	1	1	22.33	22.32	22.07
		1#12	1	1	22.52	22.24	22.16
		1#24	1	1	22.51	22.70	21.99
		12#0	2	2	21.50	21.43	21.01
		12#6	2	2	21.18	21.60	21.15
		12#11	2	2	21.29	21.66	20.92
		25#0	2	2	20.75	20.94	20.69
10M	QPSK	1#0	0	0	22.90	22.65	22.10
		1#24	0	0	22.92	23.01	22.31
		1#49	0	0	22.93	22.75	22.01
		25#0	1	1	22.12	22.40	21.68
		25#12	1	1	22.41	22.53	21.84
		25#24	1	1	22.19	22.52	21.80
		50#0	1	1	21.72	21.69	21.21
	16-QAM	1#0	1	1	22.53	22.16	22.05
		1#24	1	1	22.37	22.04	21.88
		1#49	1	1	22.31	22.22	22.06
		25#0	2	2	21.53	21.77	21.30
		25#12	2	2	21.75	21.74	21.41
		25#24	2	2	21.72	21.92	21.52
		50#0	2	2	20.38	20.83	20.63

LTE Band 17:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	0	0	22.77	22.65	22.46
		1#12	0	0	22.76	22.45	22.29
		1#24	0	0	22.69	22.45	22.59
		12#0	1	1	22.03	22.14	21.72
		12#6	1	1	22.30	21.89	21.90
		12#11	1	1	22.03	22.00	21.69
		25#0	1	1	21.50	21.43	21.15
	16-QAM	1#0	1	1	22.08	22.04	21.83
		1#12	1	1	22.29	22.01	21.89
		1#24	1	1	22.23	22.46	21.76
		12#0	2	2	21.25	21.18	20.78
		12#6	2	2	20.91	21.35	20.88
		12#11	2	2	21.07	21.41	20.70
		25#0	2	2	20.51	20.68	20.44
10M	QPSK	1#0	0	0	22.64	22.37	21.84
		1#24	0	0	22.68	22.77	22.06
		1#49	0	0	22.66	22.47	21.78
		25#0	1	1	21.89	22.12	21.42
		25#12	1	1	22.14	22.25	21.59
		25#24	1	1	21.92	22.24	21.55
		50#0	1	1	21.50	21.41	20.97
	16-QAM	1#0	1	1	22.29	21.95	21.80
		1#24	1	1	22.10	21.82	21.61
		1#49	1	1	22.06	21.96	21.79
		25#0	2	2	21.27	21.56	21.06
		25#12	2	2	21.49	21.49	21.13
		25#24	2	2	21.48	21.67	21.30
		50#0	2	2	20.14	20.59	20.39

LTE Band 41:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	0	0	22.70	22.57	22.39
		1#12	0	0	22.76	22.41	22.24
		1#24	0	0	22.64	22.41	22.52
		12#0	1	1	21.99	22.13	21.69
		12#6	1	1	22.23	21.86	21.86
		12#11	1	1	21.97	21.94	21.66
		25#0	1	1	21.48	21.40	21.12
	16-QAM	1#0	1	1	22.01	22.01	21.76
		1#12	1	1	22.22	21.97	21.85
		1#24	1	1	22.22	22.41	21.73
		12#0	2	2	21.20	21.13	20.73
		12#6	2	2	20.87	21.27	20.84
		12#11	2	2	21.00	21.37	20.61
		25#0	2	2	20.48	20.65	20.38
10M	QPSK	1#0	0	0	22.60	22.33	21.82
		1#24	0	0	22.64	22.74	22.02
		1#49	0	0	22.62	22.44	21.71
		25#0	1	1	21.86	22.08	21.40
		25#12	1	1	22.12	22.24	21.54
		25#24	1	1	21.88	22.18	21.50
		50#0	1	1	21.45	21.40	20.93
	16-QAM	1#0	1	1	22.28	21.87	21.78
		1#24	1	1	22.05	21.76	21.60
		1#49	1	1	22.01	21.91	21.76
		25#0	2	2	21.21	21.47	21.00
		25#12	2	2	21.44	21.44	21.08
		25#24	2	2	21.40	21.60	21.25
		50#0	2	2	20.08	20.51	20.33
15M	QPSK	1#0	0	0	22.89	22.95	22.02
		1#37	0	0	22.89	22.95	22.15
		1#74	0	0	22.93	22.85	22.36
		36#0	1	1	22.00	22.12	21.12
		36#17	1	1	22.23	21.93	21.02
		36#35	1	1	22.31	22.02	21.26
		75#0	1	1	21.55	21.42	20.71
	16-QAM	1#0	1	1	22.04	21.71	21.88
		1#37	1	1	22.17	22.01	21.68
		1#74	1	1	22.01	21.66	21.43
		36#0	2	2	21.11	21.26	21.17
		36#17	2	2	21.03	21.29	20.95
		36#35	2	2	20.95	21.36	20.94
		75#0	2	2	20.05	20.70	20.35

20M	QPSK	1#0	0	0	22.48	22.75	22.05
		1#49	0	0	22.63	22.80	22.00
		1#99	0	0	22.77	22.80	22.16
		50#0	1	1	22.36	22.13	21.30
		50#24	1	1	22.02	21.68	21.46
		50#49	1	1	22.04	21.32	21.53
		100#0	1	1	21.46	20.56	20.63
	16-QAM	1#0	1	1	22.12	21.66	21.54
		1#49	1	1	22.08	21.93	21.65
		1#99	1	1	21.85	21.77	21.87
		50#0	2	2	21.23	21.04	20.69
		50#24	2	2	21.04	20.93	20.60
		50#49	2	2	21.15	20.93	21.01
		100#0	2	2	20.42	20.74	19.96

Note:

- 1.SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
- 2.The CMW500 Wideband Radio Communication tester is used for LTE output power measurements and SAR testing. Closed loop power control is used to keep the radio transmitters the max output power during the test.
- 3.KDB941225D05v02- SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is > ½ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg

Bluetooth:

Mode	Channel frequency (MHz)	RF Output Power (dBm)
BDR(GFSK)	2402	3.86
	2441	9.11
	2480	7.24
EDR(4-DQPSK)	2402	1.94
	2441	5.65
	2480	4.87
EDR(8-DPSK)	2402	2.29
	2441	6.21
	2480	5.29
Bluetooth LE	2402	2.29
	2440	6.73
	2480	5.4

WLAN(2.4G):

Mode	Channel	frequency (MHz)	RF Output Power (dBm)
802.11b	Low	2412	14.82
	Middle	2437	15.66
	High	2462	15.10
802.11g	Low	2412	14.76
	Middle	2437	14.65
	High	2462	13.98
802.11n HT20	Low	2412	14.62
	Middle	2437	14.69
	High	2462	14.00

WLAN(5G)Band 1

Mode	Channel No.	Channel frequency (MHz)	RF Output Power (dBm)
802.11a	36	5180	10.90
	40	5200	14.18
	48	5240	14.66
802.11n20	36	5180	9.89
	40	5200	13.94
	48	5240	14.38
802.11n40	38	5190	9.54
	46	5230	13.92
802.11ac80	42	5210	11.67

Note:

The output power was tested under data rate 6Mbps for 802.11a, 6.5Mbps for 802.11n20, 13.5Mbps for 802.11n 40, 29.3Mbps for 802.11ac80.

WLAN(5G)Band 4

Mode	Channel No.	Channel frequency (MHz)	RF Output Power (dBm)
802.11a	149	5745	13.93
	157	5785	14.83
	165	5825	14.66
802.11n20	149	5745	10.52
	157	5785	14.19
	165	5825	14.67
802.11n40	151	5755	10.26
	159	5795	14.72
802.11ac80	155	5775	12.06

Note:

The output power was tested under data rate 6Mbps for 802.11a, 6.5Mbps for 802.11n20, 13.5Mbps for 802.11n 40, 29.3Mbps for 802.11ac80.

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

The EUT is capable of function as a WLAN to cellular mobile hotspot. Additional SAR test was performed according to KDB941225 D06. Test was performed with a separation of 1cm between the EUT and the flat phantom. The EUT was positioned for SAR tests with the front and back surfaces facing the edge. Each transmit band was utilized for SAR testing. The tested mode has been selected within each band that exhibits the highest time average output power.

SAR Test Data

Environmental Conditions

Temperature:	22-24 °C	22-23 °C	22-23°C	22-23°C	22-23°C	22-24°C
Relative Humidity:	30 %	31 %	30%	30%	30%	32%
ATM Pressure:	1011 mbar	1010 mbar	1012mbar	1012mbar	1016mbar	1015mbar
Test Date:	2015/10/26	2015/10/27	2015/10/30	2015/11/1	2015/11/2	2015/11/3

Testing was performed by Rocky Xiao

GSM 850:

EUT Position	Frequency (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	824.2	GSM	/	/	/	/	/	/	/
	836.6	GSM	-0.1	32.94	33	1.014	0.122	0.124	/
	848.8	GSM	/	/	/	/	/	/	/
Left Head Tilt	824.2	GSM	/	/	/	/	/	/	/
	836.6	GSM	0.08	32.94	33	1.014	0.082	0.083	/
	848.8	GSM	/	/	/	/	/	/	/
Right Head Cheek	824.2	GSM	0.08	32.77	33	1.054	0.128	0.135	/
	836.6	GSM	0.12	32.94	33	1.014	0.138	0.14	1#
	848.8	GSM	0.1	32.69	33	1.074	0.124	0.133	/
Right Head Tilt	824.2	GSM	/	/	/	/	/	/	/
	836.6	GSM	-0.01	32.94	33	1.014	0.096	0.097	/
	848.8	GSM	/	/	/	/	/	/	/
Body-Back-Headset (10mm)	824.2	GSM	/	/	/	/	/	/	/
	836.6	GSM	0.15	32.94	33	1.014	0.415	0.421	/
	848.8	GSM	/	/	/	/	/	/	/
Body-Back (10mm)	824.2	GPRS	-0.03	29.17	29.3	1.03	0.583	0.6	2#
	836.6	GPRS	0.12	28.67	29.3	1.156	0.503	0.581	/
	848.8	GPRS	0	28.86	29.3	1.107	0.53	0.587	/
Body-Left (10mm)	824.2	GPRS	/	/	/	/	/	/	/
	836.6	GPRS	-0.14	28.67	29.3	1.156	0.157	0.181	/
	848.8	GPRS	/	/	/	/	/	/	/
Body-Right (10mm)	824.2	GPRS	/	/	/	/	/	/	/
	836.6	GPRS	0.13	28.67	29.3	1.156	0.103	0.119	/
	848.8	GPRS	/	/	/	/	/	/	/
Body-Bottom (10mm)	824.2	GPRS	/	/	/	/	/	/	/
	836.6	GPRS	-0.13	28.67	29.3	1.156	0.25	0.275	/
	848.8	GPRS	/	/	/	/	/	/	/

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.

PCS 1900:

EUT Position	Frequency (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	1850.2	GSM	/	/	/	/	/	/	/
	1880	GSM	-0.01	29.49	29.9	1.099	0.114	0.125	/
	1909.8	GSM	/	/	/	/	/	/	/
Left Head Tilt	1850.2	GSM	/	/	/	/	/	/	/
	1880	GSM	-0.05	29.49	29.9	1.099	0.07	0.077	/
	1909.8	GSM	/	/	/	/	/	/	/
Right Head Cheek	1850.2	GSM	0	29.41	29.9	1.119	0.127	0.142	/
	1880	GSM	0.15	29.49	29.9	1.099	0.128	0.141	/
	1909.8	GSM	0.15	29.8	29.9	1.023	0.145	0.148	3#
Right Head Tilt	1850.2	GSM	/	/	/	/	/	/	/
	1880	GSM	-0.16	29.49	29.9	1.099	0.08	0.088	/
	1909.8	GSM	/	/	/	/	/	/	/
Body-Back-Headset (10mm)	1850.2	GSM	/	/	/	/	/	/	/
	1880	GSM	0.16	29.49	29.9	1.099	0.215	0.236	/
	1909.8	GSM	/	/	/	/	/	/	/
Body-Back (10mm)	1850.2	GPRS	0.07	26.09	26.5	1.099	0.278	0.306	/
	1880.0	GPRS	0.2	26.02	26.5	1.117	0.268	0.299	/
	1909.8	GPRS	0.02	26.4	26.5	1.023	0.307	0.314	4#
Body-Left (10mm)	1850.2	GPRS	/	/	/	/	/	/	/
	1880.0	GPRS	-0.01	26.02	26.5	1.117	0.073	0.082	/
	1909.8	GPRS	/	/	/	/	/	/	/
Body-Right (10mm)	1850.2	GPRS	/	/	/	/	/	/	/
	1880.0	GPRS	0.18	26.02	26.5	1.117	0.061	0.068	/
	1909.8	GPRS	/	/	/	/	/	/	/
Body-Bottom (10mm)	1850.2	GPRS	/	/	/	/	/	/	/
	1880.0	GPRS	0.08	26.02	26.5	1.117	0.124	0.143	/
	1909.8	GPRS	/	/	/	/	/	/	/

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 2DL+3UL is the worst case.

WCDMA Band 5:

EUT Position	Frequency (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	-0.02	22.55	22.8	1.059	0.104	0.11	/
	846.6	RMC	/	/	/	/	/	/	/
Left Head Tilt	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	-0.07	22.55	22.8	1.059	0.069	0.073	/
	846.6	RMC	/	/	/	/	/	/	/
Right Head Cheek	826.4	RMC	0.03	22.41	22.8	1.094	0.121	0.132	/
	836.6	RMC	0.08	22.55	22.8	1.059	0.124	0.131	/
	846.6	RMC	0.17	22.68	22.8	1.028	0.133	0.137	5#
Right Head Tilt	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	-0.01	22.55	22.8	1.059	0.075	0.079	/
	846.6	RMC	/	/	/	/	/	/	/
Body-Back (10mm)	826.4	RMC	0.09	22.41	22.8	1.094	0.34	0.372	/
	836.6	RMC	0.1	22.55	22.8	1.059	0.346	0.366	/
	846.6	RMC	-0.14	22.68	22.8	1.028	0.374	0.384	6#
Body-Left (10mm)	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	-0.01	22.55	22.8	1.059	0.089	0.094	/
	846.6	RMC	/	/	/	/	/	/	/
Body-Right (10mm)	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	-0.12	22.55	22.8	1.059	0.071	0.075	/
	846.6	RMC	/	/	/	/	/	/	/
Body-Bottom (10mm)	826.4	RMC	/	/	/	/	/	/	/
	836.6	RMC	-0.15	22.55	22.8	1.059	0.165	0.173	/
	846.6	RMC	/	/	/	/	/	/	/

Note:

1. When the 1-g SAR is ≤ 0.8 W/Kg, testing for other channels are optional.
2. The EUT transmit and receive through the same antenna while testing SAR.
3. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
4. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/HSPA+/DC-HSDPA when the maximum average output of each RF channel is less than 1/4 dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

WCDMA Band 2:

EUT Position	Frequency (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	1852.4	RMC	/	/	/	/	/	/	/
	1880	RMC	0.11	22.87	23	1.03	0.175	0.18	/
	1907.6	RMC	/	/	/	/	/	/	/
Left Head Tilt	1852.4	RMC	/	/	/	/	/	/	/
	1880	RMC	0.12	22.87	23	1.03	0.105	0.108	/
	1907.6	RMC	/	/	/	/	/	/	/
Right Head Cheek	1852.4	RMC	0.1	22.65	23	1.084	0.181	0.196	/
	1880	RMC	0.01	22.87	23	1.03	0.195	0.201	7#
	1907.6	RMC	0.01	22.69	23	1.074	0.183	0.197	/
Right Head Tilt	1852.4	RMC	/	/	/	/	/	/	/
	1880	RMC	0.18	22.87	23	1.03	0.135	0.139	/
	1907.6	RMC	/	/	/	/	/	/	/
Body-Back (10mm)	1852.4	RMC	0.12	22.65	23	1.084	0.358	0.388	/
	1880	RMC	-0.03	22.87	23	1.03	0.393	0.405	8#
	1907.6	RMC	0.14	22.69	23	1.074	0.359	0.386	/
Body-Left (10mm)	1852.4	RMC	/	/	/	/	/	/	/
	1880	RMC	-0.09	22.87	23	1.03	0.106	0.109	/
	1907.6	RMC	/	/	/	/	/	/	/
Body-Right (10mm)	1852.4	RMC	/	/	/	/	/	/	/
	1880	RMC	-0.15	22.87	23	1.03	0.075	0.077	/
	1907.6	RMC	/	/	/	/	/	/	/
Body-Bottom (10mm)	1852.4	RMC	/	/	/	/	/	/	/
	1880	RMC	-0.12	22.87	23	1.03	0.192	0.187	/
	1907.6	RMC	/	/	/	/	/	/	/

Note:

1. When the 1-g SAR is ≤ 0.8 W/Kg, testing for other channels are optional.
2. The EUT transmit and receive through the same antenna while testing SAR.
3. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
4. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/HSPA+/DC-HSDPA when the maximum average output of each RF channel is less than $\frac{1}{4}$ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is $< 75\%$ of SAR limit.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

CDMA 2000 Band BC0:

EUT Position	Frequency (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	824.7	RC3+SO55	/	/	/	/	/	/	/
	836.52	RC3+SO55	-0.19	23.77	24	1.054	0.137	0.144	/
	848.31	RC3+SO55	/	/	/	/	/	/	/
Left Head Tilt	824.7	RC3+SO55	/	/	/	/	/	/	/
	836.52	RC3+SO55	-0.01	23.77	24	1.054	0.092	0.097	/
	848.31	RC3+SO55	/	/	/	/	/	/	/
Right Head Cheek	824.7	RC3+SO55	0.04	23.74	24	1.062	0.145	0.154	/
	836.52	RC3+SO55	0.03	23.77	24	1.054	0.153	0.161	9#
	848.31	RC3+SO55	0.19	23.71	24	1.069	0.146	0.156	/
Right Head Tilt	824.7	RC3+SO55	/	/	/	/	/	/	/
	836.52	RC3+SO55	-0.17	23.77	24	1.054	0.107	0.113	/
	848.31	RC3+SO55	/	/	/	/	/	/	/
Body-Back-Headset (10mm)	824.7	RC3+SO55	/	/	/	/	/	/	/
	836.52	RC3+SO55	-0.03	23.77	24	1.054	0.29	0.306	/
	848.31	RC3+SO55	/	/	/	/	/	/	/
Body-Back (10mm)	824.7	RTAP 153.6	0.12	23.71	24	1.023	0.336	0.344	/
	836.52	RTAP 153.6	0.02	23.64	24	1.023	0.333	0.341	/
	848.31	RTAP 153.6	-0.01	23.83	24	1.023	0.35	0.358	10#
Body-Left (10mm)	824.7	RTAP 153.6	/	/	/	/	/	/	/
	836.52	RTAP 153.6	-0.13	23.64	24	1.023	0.099	0.101	/
	848.31	RTAP 153.6	/	/	/	/	/	/	/
Body-Right (10mm)	824.7	RTAP 153.6	/	/	/	/	/	/	/
	836.52	RTAP 153.6	-0.08	23.64	24	1.023	0.078	0.08	/
	848.31	RTAP 153.6	/	/	/	/	/	/	/
Body-Bottom (10mm)	824.7	RTAP 153.6	/	/	/	/	/	/	/
	836.52	RTAP 153.6	0.17	23.64	24	1.023	0.153	0.158	/
	848.31	RTAP 153.6	/	/	/	/	/	/	/

CDMA 2000 Band BC1:

EUT Position	Frequency (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	1851.25	RC3+SO55	/	/	/	/	/	/	/
	1880	RC3+SO55	0.18	22.89	23.3	1.099	0.197	0.217	/
	1908.75	RC3+SO55	/	/	/	/	/	/	/
Left Head Tilt	1851.25	RC3+SO55	/	/	/	/	/	/	/
	1880	RC3+SO55	-0.16	22.89	23.3	1.099	0.136	0.149	/
	1908.75	RC3+SO55	/	/	/	/	/	/	/
Right Head Cheek	1851.25	RC3+SO55	0.17	22.92	23.3	1.091	0.239	0.261	11#
	1880	RC3+SO55	0.18	22.89	23.3	1.099	0.227	0.249	/
	1908.75	RC3+SO55	0.04	22.82	23.3	1.117	0.228	0.255	/
Right Head Tilt	1851.25	RC3+SO55	/	/	/	/	/	/	/
	1880	RC3+SO55	-0.07	22.89	23.3	1.099	0.158	0.174	/
	1908.75	RC3+SO55	/	/	/	/	/	/	/
Body-Back-Headset (10mm)	1851.25	RC3+SO55	/	/	/	/	/	/	/
	1880	RC3+SO55	-0.04	22.89	23.3	1.099	0.242	0.266	/
	1908.75	RC3+SO55	/	/	/	/	/	/	/
Body-Back (10mm)	1851.25	RTAP 153.6	0.1	22.73	23.3	1.023	0.282	0.288	/
	1880	RTAP 153.6	-0.08	22.84	23.3	1.023	0.292	0.299	12#
	1908.75	RTAP 153.6	0.2	22.74	23.3	1.023	0.286	0.293	/
Body-Left (10mm)	1851.25	RTAP 153.6	/	/	/	/	/	/	/
	1880	RTAP 153.6	0.02	22.84	23.3	1.023	0.094	0.096	/
	1908.75	RTAP 153.6	/	/	/	/	/	/	/
Body-Right (10mm)	1851.25	RTAP 153.6	/	/	/	/	/	/	/
	1880	RTAP 153.6	0.1	22.84	23.3	1.023	0.06	0.061	/
	1908.75	RTAP 153.6	/	/	/	/	/	/	/
Body-Bottom (10mm)	1851.25	RTAP 153.6	/	/	/	/	/	/	/
	1880	RTAP 153.6	0.17	22.84	23.3	1.023	0.14	0.142	/
	1908.75	RTAP 153.6	/	/	/	/	/	/	/

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. The EUT transmit and receive through the same antenna while testing SAR.
4. KDB 941225 D01- SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55, the 3G SAR test reduction procedure is applied to RC1 with RC3 as the primary mode. Body-worn accessory and other body SAR are measured using Subtype 0/1 Physical Layer configurations for Rev. 0. The 3G SAR test reduction procedure is applied to Rev. A, Subtype 2 Physical layer configuration, with Rev. 0 as the primary mode;
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

LTE Band 2:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	1720	20	1RB	/	/	/	/	/	/	/
	1732.5	20	1RB	/	/	/	/	/	/	/
	1745	20	1RB	-0.07	23.09	23.2	1.026	0.152	0.156	
	1745	20	50%RB	0	21.86	23.2	1.361	0.098	0.133	/
Left Head Tilt	1720	20	1RB	/	/	/	/	/	/	/
	1732.5	20	1RB	/	/	/	/	/	/	/
	1745	20	1RB	0.02	23.09	23.2	1.026	0.097	0.1	/
	1745	20	50%RB	0.09	21.86	23.2	1.361	0.0832	0.113	/
Right Head Cheek	1720	20	1RB	0.11	22.2	23.2	1.259	0.162	0.204	/
	1732.5	20	1RB	0.16	22.11	23.2	1.285	0.162	0.208	/
	1745	20	1RB	0.17	23.09	23.2	1.026	0.209	0.214	13#
	1745	20	50%RB	0.14	21.86	23.2	1.361	0.144	0.196	/
Right Head Tilt	1720	20	1RB	/	/	/	/	/	/	/
	1732.5	20	1RB	/	/	/	/	/	/	/
	1745	20	1RB	0.15	23.09	23.2	1.026	0.133	0.136	/
	1745	20	50%RB	0.09	21.86	23.2	1.361	0.074	0.101	/
Body-Back (10mm)	1720	20	1RB	0.09	22.2	23.2	1.259	0.176	0.221	/
	1732.5	20	1RB	0.08	22.11	23.2	1.285	0.174	0.223	/
	1745	20	1RB	-0.12	23.09	23.2	1.026	0.222	0.228	14#
	1745	20	50%RB	0.07	21.86	23.2	1.361	0.143	0.194	/
Body-Left (10mm)	1720	20	1RB	/	/	/	/	/	/	/
	1732.5	20	1RB	/	/	/	/	/	/	/
	1745	20	1RB	0.02	23.09	23.2	1.026	0.056	0.057	/
	1745	20	50%RB	0.11	21.86	23.2	1.361	0.035	0.047	/
Body-Right (10mm)	1720	20	1RB	/	/	/	/	/	/	/
	1732.5	20	1RB	/	/	/	/	/	/	/
	1745	20	1RB	-0.09	23.09	23.2	1.026	0.033	0.034	/
	1745	20	50%RB	0.12	21.86	23.2	1.361	0.021	0.029	/
Body-Bottom (10mm)	1720	20	1RB	/	/	/	/	/	/	/
	1732.5	20	1RB	/	/	/	/	/	/	/
	1745	20	1RB	0.19	23.09	23.2	1.026	0.101	0.104	/
	1745	20	50%RB	0.14	21.86	23.2	1.361	0.062	0.085	/

LTE Band 4:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
							Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	1860	20	1RB	0.06	22.01	23	1.256	0.163	0.205	
	1880	20	1RB	0.19	21.92	23	1.282	0.163	0.209	/
	1900	20	1RB	0.17	22.9	23	1.023	0.209	0.214	15#
	1900	20	50%RB	0.03	21.86	23	1.3	0.133	0.173	/
Left Head Tilt	1860	20	1RB	/	/	/	/	/	/	/
	1880	20	1RB	/	/	/	/	/	/	/
	1900	20	1RB	0.13	22.9	23	1.023	0.123	0.126	/
	1900	20	50%RB	0.18	21.86	23	1.3	0.082	0.106	/
Right Head Cheek	1860	20	1RB	/	/	/	/	/	/	/
	1880	20	1RB	/	/	/	/	/	/	/
	1900	20	1RB	-0.09	22.9	23	1.023	0.168	0.172	/
	1900	20	50%RB	0.19	21.86	23	1.3	0.112	0.146	/
Right Head Tilt	1860	20	1RB	/	/	/	/	/	/	/
	1880	20	1RB	/	/	/	/	/	/	/
	1900	20	1RB	0.12	22.9	23	1.023	0.11	0.113	/
	1900	20	50%RB	0.1	21.86	23	1.3	0.066	0.086	
Body-Back (10mm)	1860	20	1RB	0.14	22.01	23	1.256	0.343	0.431	/
	1880	20	1RB	0.1	21.92	23	1.282	0.328	0.421	/
	1900	20	1RB	-0.01	22.9	23	1.023	0.431	0.441	16#
	1900	20	50%RB	0.02	21.86	23	1.3	0.32	0.416	/
Body-Left (10mm)	1860	20	1RB	/	/	/	/	/	/	/
	1880	20	1RB	/	/	/	/	/	/	/
	1900	20	1RB	-0.05	22.9	23	1.023	0.101	0.103	/
	1900	20	50%RB	0.16	21.86	23	1.3	0.092	0.119	/
Body-Right (10mm)	1860	20	1RB	/	/	/	/	/	/	/
	1880	20	1RB	/	/	/	/	/	/	/
	1900	20	1RB	-0.03	22.9	23	1.023	0.054	0.055	/
	1900	20	50%RB	0.11	21.86	23	1.3	0.043	0.056	/
Body-Bottom (10mm)	1860	20	1RB	/	/	/	/	/	/	/
	1880	20	1RB	/	/	/	/	/	/	/
	1900	20	1RB	-0.13	22.9	23	1.023	0.166	0.17	/
	1900	20	50%RB	0.04	21.86	23	1.3	0.128	0.167	/

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
3. KDB941225D05- SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is $> 1.45\text{ W/kg}$
4. KDB941225D05- For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is $< 1.45\text{ W/kg}$, tests for the remaining required test channels are optional.
5. KDB941225D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are $\leq 0.8\text{ W/kg}$.
6. KDB941225D05- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
7. KDB941225D05- other channel bandwidths SAR test is required when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is $> 1.45\text{ W/kg}$.
8. Worst case SAR for 50% RB allocation is selected to be tested.

WIFI 2.4G:


EUT Position	Frequency (MHz)	Test Mode	Power Drift (dB)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	2412	802.11b	0.12	14.82	15.8	1.253	0.345	0.432	/
	2437	802.11b	-0.16	15.66	15.8	1.033	0.438	0.452	17#
	2462	802.11b	0.06	15.1	15.8	1.175	0.371	0.436	/
Left Head Tilt	2412	802.11b	0.17	14.82	15.8	1.253	/	/	/
	2437	802.11b	-0.11	15.66	15.8	1.033	0.421	0.435	/
	2462	802.11b	-0.11	15.1	15.8	1.175	/	/	/
Right Head Cheek	2412	802.11b	0.17	14.82	15.8	1.253	/	/	/
	2437	802.11b	0	15.66	15.8	1.033	0.385	0.398	/
	2462	802.11b	0.13	15.1	15.8	1.175	/	/	/
Right Head Tilt	2412	802.11b	0.12	14.82	15.8	1.253	/	/	/
	2437	802.11b	-0.11	15.66	15.8	1.033	0.36	0.372	/
	2462	802.11b	0.12	15.1	15.8	1.175	/	/	/
Body-Back (10mm)	2412	802.11b	0.15	14.82	15.8	1.253	0.265	0.332	/
	2437	802.11b	0.17	15.66	15.8	1.033	0.328	0.339	18#
	2462	802.11b	0.18	15.1	15.8	1.175	0.28	0.329	/
Body-Left (10mm)	2412	802.11b	-0.12	14.82	15.8	1.253	/	/	/
	2437	802.11b	0.08	15.66	15.8	1.033	0.102	0.105	/
	2462	802.11b	-0.06	15.1	15.8	1.175	/	/	/
Body-Right (10mm)	2412	802.11b	-0.06	14.82	15.8	1.253	/	/	/
	2437	802.11b	-0.08	15.66	15.8	1.033	0.13	0.134	/
	2462	802.11b	0.14	15.1	15.8	1.175	/	/	/
Body-Top (10mm)	2412	802.11b	0.02	14.82	15.8	1.253	/	/	/
	2437	802.11b	0.1	15.66	15.8	1.033	0.249	0.257	/
	2462	802.11b	0.1	15.1	15.8	1.175	/	/	/

Note:

1. When the 1-g SAR is $\leq 0.8W/Kg$, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. KDB248227-SAR is not required for 802.11g channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

BT&WLAN and GSM&3G&4G Antennas Location:

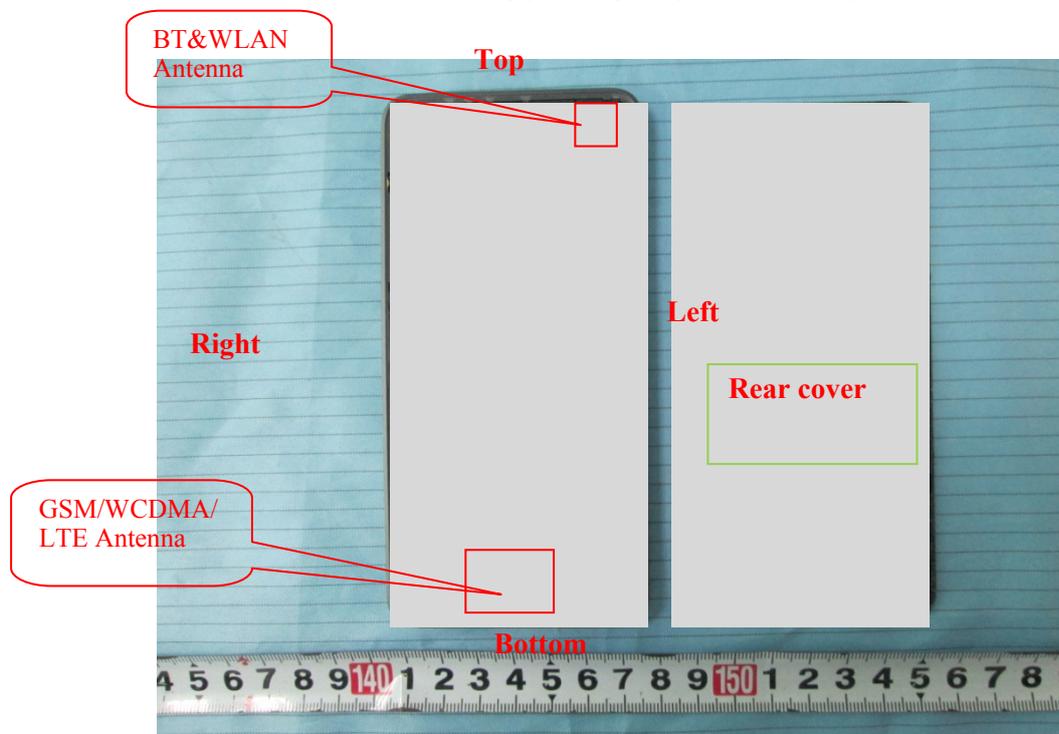

Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities			Antennas Distance (mm)
Transmitter Combination	Simultaneous?	Hotspot?	
GSM + WCDMA	×	×	0
GSM+LTE	×	×	0
GSM + Bluetooth	√	×	118
GSM + WLAN(2.4G)	√	√	118
GSM + WLAN(5G Band 1)	√	√	118
GSM + WLAN(5G Band 4)	√	√	118
WCDMA+LTE	×	×	0
WCDMA + Bluetooth	√	×	118
WCDMA + WLAN(2.4G)	√	√	118
WCDMA + WLAN(5G Band 1)	√	√	118
WCDMA + WLAN(5G Band 4)	√	√	118
LTE + Bluetooth	√	×	118
LTE + WLAN(2.4G)	√	√	118
LTE + WLAN(5G Band 1)	√	√	118
LTE + WLAN(5G Band 4)	√	√	118

Standalone SAR test exclusion considerations

Mode	Frequency (MHz)	Pavg (dBm)	Pavg (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
Bluetooth	2441	9.2	8.32	0	2.6	3	YES

NOTE:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. f(GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Standalone SAR estimation:

Mode	Frequency (GHz)	Pavg (dBm)	Pavg (mW)	Distance (mm)	Estimated 1-g (W/kg)
BT Head	2441	9.2	8.32	0	0.347
BT Body	2441	9.2	8.32	10	0.173

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})/x}]$$

W/kg for test separation distances ≤ 50 mm;

where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

Simultaneous and Hotspot SAR test exclusion considerations:

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		ΣSAR < 1.6W/kg
		SAR1	SAR2	
GSM 850+Bluetooth	Left Head Cheek	0.124	0.347	0.471
	Left Head Tilt	0.083	0.347	0.43
	Right Head Cheek	0.14	0.347	0.487
	Right Head Tilt	0.097	0.347	0.444
	Body-Back-Headset	0.421	0.173	0.594
	Body-Back	0.6	0.173	0.773
	Body- Left	0.181	0.173	0.354
	Body- Right	0.119	0.173	0.292
	Body-Bottom	0.275	0.173	0.448
PCS1900 +Bluetooth	Left Head Cheek	0.125	0.347	0.472
	Left Head Tilt	0.077	0.347	0.424
	Right Head Cheek	0.148	0.347	0.495
	Right Head Tilt	0.088	0.347	0.435
	Body-Back-Headset	0.236	0.173	0.409
	Body-Back	0.314	0.173	0.487
	Body- Left	0.082	0.173	0.255
	Body- Right	0.068	0.173	0.241
	Body-Bottom	0.143	0.173	0.316
WCDMA Band 5+Bluetooth	Left Head Cheek	0.11	0.347	0.457
	Left Head Tilt	0.073	0.347	0.42
	Right Head Cheek	0.137	0.347	0.484
	Right Head Tilt	0.079	0.347	0.426
	Body-Back	0.384	0.173	0.557
	Body- Left	0.094	0.173	0.267
	Body- Right	0.075	0.173	0.248
	Body-Bottom	0.173	0.173	0.346
WCDMA Band 2+Bluetooth	Left Head Cheek	0.18	0.347	0.527
	Left Head Tilt	0.108	0.347	0.455
	Right Head Cheek	0.201	0.347	0.548
	Right Head Tilt	0.139	0.347	0.486
	Body-Back	0.405	0.173	0.578
	Body- Left	0.109	0.173	0.282
	Body- Right	0.077	0.173	0.25
	Body-Bottom	0.187	0.173	0.36
CDMA 2000 BC0+Bluetooth	Left Head Cheek	0.128	0.347	0.475
	Left Head Tilt	0.085	0.347	0.432
	Right Head Cheek	0.158	0.347	0.505
	Right Head Tilt	0.108	0.347	0.455
	Body-Back-Headset	0.29	0.173	0.463
	Body-Back	0.356	0.173	0.529
	Body- Left	0.118	0.173	0.291
	Body- Right	0.067	0.173	0.24
	Body-Bottom	0.166	0.173	0.339
CDMA 2000 BC1 +Bluetooth	Left Head Cheek	0.197	0.347	0.544
	Left Head Tilt	0.126	0.347	0.473
	Right Head Cheek	0.244	0.347	0.591

	Right Head Tilt	0.157	0.347	0.504
	Body-Back-Headset	0.253	0.173	0.426
	Body-Back	0.296	0.173	0.469
	Body- Left	0.095	0.173	0.268
	Body- Right	0.067	0.173	0.24
	Body-Bottom	0.141	0.173	0.314
LTE Band 2+Bluetooth	Left Head Cheek	0.214	0.347	0.561
	Left Head Tilt	0.136	0.347	0.483
	Right Head Cheek	0.156	0.347	0.503
	Right Head Tilt	0.113	0.347	0.46
	Body-Back	0.441	0.173	0.614
	Body- Left	0.119	0.173	0.292
	Body- Right	0.056	0.173	0.229
LTE Band 4+Bluetooth	Body-Bottom	0.17	0.173	0.343
	Left Head Cheek	0.172	0.347	0.519
	Left Head Tilt	0.113	0.347	0.46
	Right Head Cheek	0.214	0.347	0.561
	Right Head Tilt	0.126	0.347	0.473
	Body-Back	0.228	0.173	0.401
	Body- Left	0.057	0.173	0.23
LTE Band 12+Bluetooth	Body- Right	0.034	0.173	0.207
	Body-Bottom	0.104	0.173	0.277
	Left Head Cheek	0.103	0.347	0.45
	Left Head Tilt	0.059	0.347	0.406
	Right Head Cheek	0.108	0.347	0.455
	Right Head Tilt	0.057	0.347	0.404
	Body-Back	0.18	0.173	0.353
LTE Band 17+Bluetooth	Body- Left	0.118	0.173	0.291
	Body- Right	0.11	0.173	0.283
	Body-Bottom	0.06	0.173	0.233
	Left Head Cheek	0.109	0.347	0.456
	Left Head Tilt	0.063	0.347	0.41
	Right Head Cheek	0.106	0.347	0.453
	Right Head Tilt	0.059	0.347	0.406
LTE Band 41+Bluetooth	Body-Back	0.213	0.173	0.386
	Body- Left	0.139	0.173	0.312
	Body- Right	0.121	0.173	0.294
	Body-Bottom	0.088	0.173	0.261
	Left Head Cheek	0.095	0.347	0.442
	Left Head Tilt	0.037	0.347	0.384
	Right Head Cheek	0.105	0.347	0.452
LTE Band 41+Bluetooth	Right Head Tilt	0.038	0.347	0.385
	Body-Back	0.141	0.173	0.314
	Body- Left	0.072	0.173	0.245
	Body- Right	0.055	0.173	0.228
	Body-Bottom	0.107	0.173	0.28

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		ΣSAR < 1.6W/kg
		SAR1	SAR2	
GSM 850+WLAN(2.4G)	Left Head Cheek	0.124	0.452	0.576
	Left Head Tilt	0.083	0.435	0.518
	Right Head Cheek	0.14	0.398	0.538
	Right Head Tilt	0.097	0.372	0.469
	Body-Back-Headset	0.421	0.339	0.76
	Body-Back	0.6	0.339	0.939
	Body- Left	0.181	0.105	0.286
	Body- Right	0.119	0.134	0.253
PCS1900 +WLAN(2.4G)	Left Head Cheek	0.125	0.452	0.577
	Left Head Tilt	0.077	0.435	0.512
	Right Head Cheek	0.148	0.398	0.546
	Right Head Tilt	0.088	0.372	0.46
	Body-Back-Headset	0.236	0.339	0.575
	Body-Back	0.314	0.339	0.653
	Body- Left	0.082	0.105	0.187
	Body- Right	0.068	0.134	0.202
WCDMA Band 5+WLAN(2.4G)	Left Head Cheek	0.11	0.452	0.562
	Left Head Tilt	0.073	0.435	0.508
	Right Head Cheek	0.137	0.398	0.535
	Right Head Tilt	0.079	0.372	0.451
	Body-Back	0.384	0.339	0.723
	Body- Left	0.094	0.105	0.199
	Body- Right		0.134	0.134
WCDMA Band 2+WLAN(2.4G)	Left Head Cheek	0.18	0.452	0.632
	Left Head Tilt	0.108	0.435	0.543
	Right Head Cheek	0.201	0.398	0.599
	Right Head Tilt	0.139	0.372	0.511
	Body-Back	0.405	0.339	0.744
	Body- Left	0.109	0.105	0.214
	Body- Right	0.077	0.134	0.211
CDMA 2000 BC0+WLAN(2.4G)	Left Head Cheek	0.128	0.452	0.58
	Left Head Tilt	0.085	0.435	0.52
	Right Head Cheek	0.158	0.398	0.556
	Right Head Tilt	0.108	0.372	0.48
	Body-Back-Headset	0.29	0.339	0.629
	Body-Back	0.356	0.339	0.695
	Body- Left	0.118	0.105	0.223
	Body- Right	0.067	0.134	0.201
CDMA 2000 BC1 +WLAN(2.4G)	Left Head Cheek	0.197	0.452	0.649
	Left Head Tilt	0.126	0.435	0.561
	Right Head Cheek	0.244	0.398	0.642
	Right Head Tilt	0.157	0.372	0.529
	Body-Back-Headset	0.253	0.339	0.592
	Body-Back	0.296	0.339	0.635
	Body- Left	0.095	0.105	0.2
	Body- Right	0.067	0.134	0.201

LTE Band 2+WLAN(2.4G)	Left Head Cheek	0.214	0.452	0.666
	Left Head Tilt	0.136	0.435	0.571
	Right Head Cheek	0.156	0.398	0.554
	Right Head Tilt	0.113	0.372	0.485
	Body-Back	0.441	0.339	0.78
	Body- Left	0.119	0.105	0.224
	Body- Right	0.056	0.134	0.19
LTE Band 4+WLAN(2.4G)	Left Head Cheek	0.172	0.452	0.624
	Left Head Tilt	0.113	0.435	0.548
	Right Head Cheek	0.214	0.398	0.612
	Right Head Tilt	0.126	0.372	0.498
	Body-Back	0.228	0.339	0.567
	Body- Left	0.057	0.105	0.162
	Body- Right	0.034	0.134	0.168
LTE Band 12+WLAN(2.4G)	Left Head Cheek	0.103	0.452	0.555
	Left Head Tilt	0.059	0.435	0.494
	Right Head Cheek	0.108	0.398	0.506
	Right Head Tilt	0.057	0.372	0.429
	Body-Back	0.18	0.339	0.519
	Body- Left	0.118	0.105	0.223
	Body- Right	0.11	0.134	0.244
LTE Band 17+WLAN(2.4G)	Left Head Cheek	0.109	0.452	0.561
	Left Head Tilt	0.063	0.435	0.498
	Right Head Cheek	0.106	0.398	0.504
	Right Head Tilt	0.059	0.372	0.431
	Body-Back	0.213	0.339	0.552
	Body- Left	0.139	0.105	0.244
	Body- Right	0.121	0.134	0.255
LTE Band 41+WLAN(2.4G)	Left Head Cheek	0.095	0.452	0.547
	Left Head Tilt	0.037	0.435	0.472
	Right Head Cheek	0.105	0.398	0.503
	Right Head Tilt	0.038	0.372	0.41
	Body-Back	0.141	0.339	0.48
	Body- Left	0.072	0.105	0.177
	Body- Right	0.055	0.134	0.189

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		ΣSAR < 1.6W/kg
		SAR1	SAR2	
GSM 850+WLAN(5G BAND 1)	Left Head Cheek	0.124	0.368	0.492
	Left Head Tilt	0.083	0.258	0.341
	Right Head Cheek	0.14	0.336	0.476
	Right Head Tilt	0.097	0.245	0.342
	Body-Back-Headset	0.421	0.156	0.577
	Body-Back	0.6	0.156	0.756
	Body- Left	0.181	0.056	0.237
	Body- Right	0.119	0.068	0.187
PCS1900 +WLAN(5G BAND 1)	Left Head Cheek	0.125	0.368	0.493
	Left Head Tilt	0.077	0.258	0.335
	Right Head Cheek	0.148	0.336	0.484
	Right Head Tilt	0.088	0.245	0.333
	Body-Back-Headset	0.236	0.156	0.392
	Body-Back	0.314	0.156	0.47
	Body- Left	0.082	0.056	0.138
	Body- Right	0.068	0.068	0.136
WCDMA Band 5+WLAN(5G BAND 1)	Left Head Cheek	0.11	0.368	0.478
	Left Head Tilt	0.073	0.258	0.331
	Right Head Cheek	0.137	0.336	0.473
	Right Head Tilt	0.079	0.245	0.324
	Body-Back	0.384	0.156	0.54
	Body- Left	0.094	0.056	0.15
	Body- Right	0	0.068	0.068
WCDMA Band 2+WLAN(5G BAND 1)	Left Head Cheek	0.18	0.368	0.548
	Left Head Tilt	0.108	0.258	0.366
	Right Head Cheek	0.201	0.336	0.537
	Right Head Tilt	0.139	0.245	0.384
	Body-Back	0.405	0.156	0.561
	Body- Left	0.109	0.056	0.165
	Body- Right	0.077	0.068	0.145
CDMA 2000 BC0+WLAN(5G BAND 1)	Left Head Cheek	0.128	0.368	0.496
	Left Head Tilt	0.085	0.258	0.343
	Right Head Cheek	0.158	0.336	0.494
	Right Head Tilt	0.108	0.245	0.353
	Body-Back-Headset	0.29	0.156	0.446
	Body-Back	0.356	0.156	0.512
	Body- Left	0.118	0.056	0.174
	Body- Right	0.067	0.068	0.135
CDMA 2000 BC1 +WLAN(5G BAND 1)	Left Head Cheek	0.197	0.368	0.565
	Left Head Tilt	0.126	0.258	0.384
	Right Head Cheek	0.244	0.336	0.58
	Right Head Tilt	0.157	0.245	0.402
	Body-Back-Headset	0.253	0.156	0.409
	Body-Back	0.296	0.156	0.452
	Body- Left	0.095	0.056	0.151
	Body- Right	0.067	0.068	0.135

LTE Band 2+WLAN(5G BAND 1)	Left Head Cheek	0.214	0.368	0.582
	Left Head Tilt	0.136	0.258	0.394
	Right Head Cheek	0.156	0.336	0.492
	Right Head Tilt	0.113	0.245	0.358
	Body-Back	0.441	0.156	0.597
	Body- Left	0.119	0.056	0.175
	Body- Right	0.056	0.068	0.124
LTE Band 4+WLAN(5G BAND 1)	Left Head Cheek	0.172	0.368	0.54
	Left Head Tilt	0.113	0.258	0.371
	Right Head Cheek	0.214	0.336	0.55
	Right Head Tilt	0.126	0.245	0.371
	Body-Back	0.228	0.156	0.384
	Body- Left	0.057	0.056	0.113
	Body- Right	0.034	0.068	0.102
LTE Band 12+WLAN(5G BAND 1)	Left Head Cheek	0.103	0.368	0.471
	Left Head Tilt	0.059	0.258	0.317
	Right Head Cheek	0.108	0.336	0.444
	Right Head Tilt	0.057	0.245	0.302
	Body-Back	0.18	0.156	0.336
	Body- Left	0.118	0.056	0.174
	Body- Right	0.11	0.068	0.178
LTE Band 17+WLAN(5G BAND 1)	Left Head Cheek	0.109	0.368	0.477
	Left Head Tilt	0.063	0.258	0.321
	Right Head Cheek	0.106	0.336	0.442
	Right Head Tilt	0.059	0.245	0.304
	Body-Back	0.213	0.156	0.369
	Body- Left	0.139	0.056	0.195
	Body- Right	0.121	0.068	0.189
LTE Band 41+ WLAN(5G Band 1)	Left Head Cheek	0.095	0.368	0.463
	Left Head Tilt	0.037	0.258	0.295
	Right Head Cheek	0.105	0.336	0.441
	Right Head Tilt	0.038	0.245	0.283
	Body-Back	0.141	0.156	0.297
	Body- Left	0.072	0.056	0.128
	Body- Right	0.055	0.068	0.123

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		ΣSAR < 1.6W/kg
		SAR1	SAR2	
GSM 850+WLAN(5G BAND 4)	Left Head Cheek	0.124	0.432	0.556
	Left Head Tilt	0.083	0.339	0.422
	Right Head Cheek	0.14	0.405	0.545
	Right Head Tilt	0.097	0.319	0.416
	Body-Back-Headset	0.421	0.178	0.599
	Body-Back	0.6	0.178	0.778
	Body- Left	0.181	0.078	0.259
	Body- Right	0.119	0.085	0.204
PCS1900 +WLAN(5G BAND 4)	Left Head Cheek	0.125	0.432	0.557
	Left Head Tilt	0.077	0.339	0.416
	Right Head Cheek	0.148	0.405	0.553
	Right Head Tilt	0.088	0.319	0.407
	Body-Back-Headset	0.236	0.178	0.414
	Body-Back	0.314	0.178	0.492
	Body- Left	0.082	0.078	0.16
	Body- Right	0.068	0.085	0.153
WCDMA Band 5+WLAN(5G BAND 4)	Left Head Cheek	0.11	0.432	0.542
	Left Head Tilt	0.073	0.339	0.412
	Right Head Cheek	0.137	0.405	0.542
	Right Head Tilt	0.079	0.319	0.398
	Body-Back	0.384	0.178	0.562
	Body- Left	0.094	0.078	0.172
	Body- Right	0	0.085	0.085
WCDMA Band 2+WLAN(5G BAND 4)	Left Head Cheek	0.18	0.432	0.612
	Left Head Tilt	0.108	0.339	0.447
	Right Head Cheek	0.201	0.405	0.606
	Right Head Tilt	0.139	0.319	0.458
	Body-Back	0.405	0.178	0.583
	Body- Left	0.109	0.078	0.187
	Body- Right	0.077	0.085	0.162
CDMA 2000 BC0+WLAN(5G BAND 4)	Left Head Cheek	0.128	0.432	0.56
	Left Head Tilt	0.085	0.339	0.424
	Right Head Cheek	0.158	0.405	0.563
	Right Head Tilt	0.108	0.319	0.427
	Body-Back-Headset	0.29	0.178	0.468
	Body-Back	0.356	0.178	0.534
	Body- Left	0.118	0.078	0.196
	Body- Right	0.067	0.085	0.152
CDMA 2000 BC1 +WLAN(5G BAND 4)	Left Head Cheek	0.197	0.432	0.629
	Left Head Tilt	0.126	0.339	0.465
	Right Head Cheek	0.244	0.405	0.649
	Right Head Tilt	0.157	0.319	0.476
	Body-Back-Headset	0.253	0.178	0.431
	Body-Back	0.296	0.178	0.474
	Body- Left	0.095	0.078	0.173
	Body- Right	0.067	0.085	0.152

LTE Band 2+WLAN(5G BAND 4)	Left Head Cheek	0.214	0.432	0.646
	Left Head Tilt	0.136	0.339	0.475
	Right Head Cheek	0.156	0.405	0.561
	Right Head Tilt	0.113	0.319	0.432
	Body-Back	0.441	0.178	0.619
	Body- Left	0.119	0.078	0.197
	Body- Right	0.056	0.085	0.141
LTE Band 4+WLAN(5G BAND 4)	Left Head Cheek	0.172	0.432	0.604
	Left Head Tilt	0.113	0.339	0.452
	Right Head Cheek	0.214	0.405	0.619
	Right Head Tilt	0.126	0.319	0.445
	Body-Back	0.228	0.178	0.406
	Body- Left	0.057	0.078	0.135
	Body- Right	0.034	0.085	0.119
LTE Band 12+WLAN(5G BAND 4)	Left Head Cheek	0.103	0.432	0.535
	Left Head Tilt	0.059	0.339	0.398
	Right Head Cheek	0.108	0.405	0.513
	Right Head Tilt	0.057	0.319	0.376
	Body-Back	0.18	0.178	0.358
	Body- Left	0.118	0.078	0.196
	Body- Right	0.11	0.085	0.195
LTE Band 17+WLAN(5G BAND 4)	Left Head Cheek	0.109	0.432	0.541
	Left Head Tilt	0.063	0.339	0.402
	Right Head Cheek	0.106	0.405	0.511
	Right Head Tilt	0.059	0.319	0.378
	Body-Back	0.213	0.178	0.391
	Body- Left	0.139	0.078	0.217
	Body- Right	0.121	0.085	0.206
LTE Band 41+ WLAN(5G Band 4)	Left Head Cheek	0.095	0.432	0.527
	Left Head Tilt	0.037	0.339	0.376
	Right Head Cheek	0.105	0.405	0.51
	Right Head Tilt	0.038	0.319	0.357
	Body-Back	0.141	0.178	0.319
	Body- Right	0.055	0.085	0.14

Note:

Hotspot mode SAR is only required for the edges within 25mm from the transmitting antenna located.

Conclusion:

Σ SAR < 1.6 W/kg therefore simultaneous transmission SAR with Volume Scans is **not** required.

SAR Plots (Summary of the Highest SAR Values)

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

Test Plot 1#: GSM 850 Right Cheek Middle Channel

DUT: TD-LTE Digital Mobile Phone; Type: SM801;

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 42.881$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.52, 9.52, 9.52); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Head/GSM 850 Right Cheek/Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.149 W/kg


Head/GSM 850 Right Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.407 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.145 W/kg

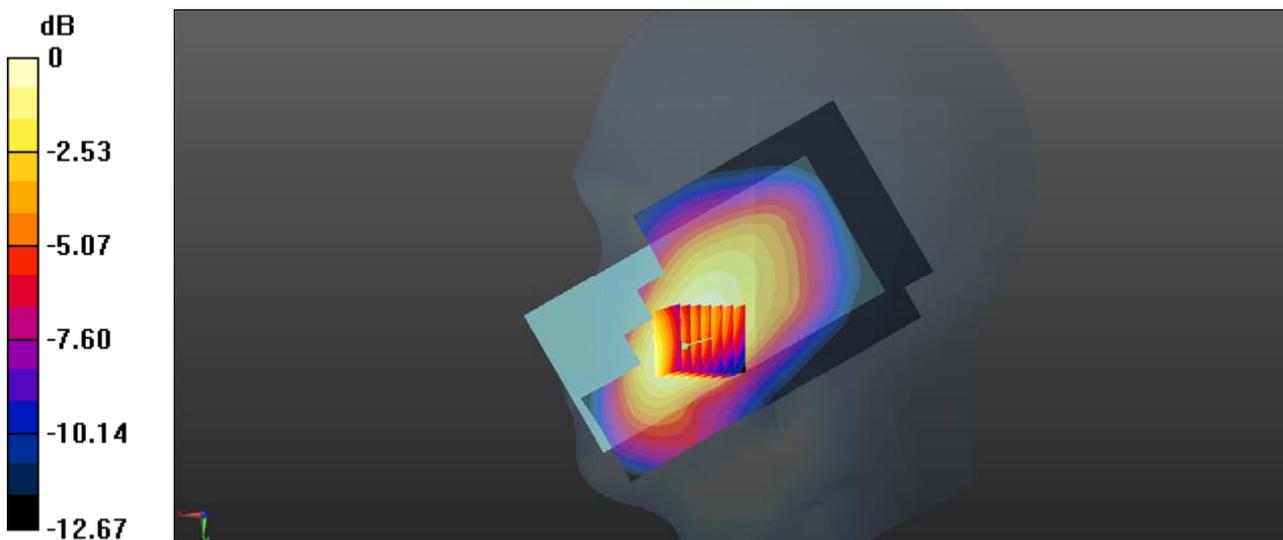

0 dB = 0.145 W/kg = -8.39 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

Test Plot 2#: GSM 850 Back Middle Channel

DUT: TD-LTE Digital Mobile Phone; Type: SM801;

Communication System: Generic GPRS-4 slots; Frequency: 836.6 MHz;Duty Cycle: 1:2
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.976 \text{ S/m}$; $\epsilon_r = 55.099$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.17, 9.17, 9.17); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Body/GSM 850 Back/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.652 W/kg


Body/GSM 850 Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.14 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.778 W/kg

SAR(1 g) = 0.583 W/kg; SAR(10 g) = 0.401 W/kg

Maximum value of SAR (measured) = 0.633 W/kg

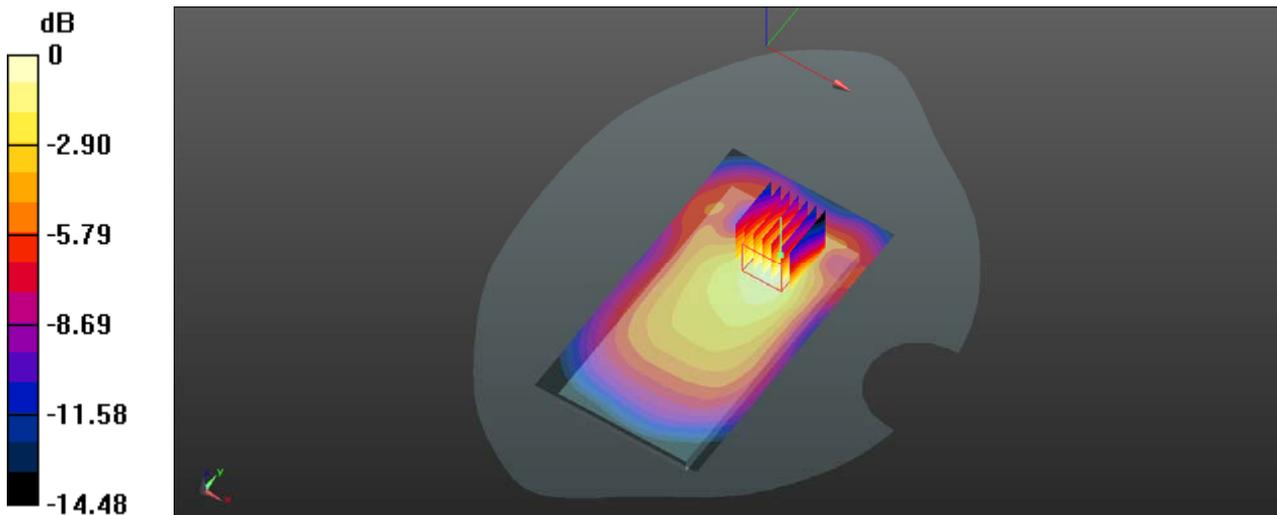

0 dB = 0.633 W/kg = -1.99 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

Test Plot 3#: PCS 1900 Right Cheek High Channel

DUT: TD-LTE Digital Mobile Phone; Type: SM801;

Communication System: Generic GSM; Frequency: 1909.8 MHz;Duty Cycle: 1:8

Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.414 \text{ S/m}$; $\epsilon_r = 39.611$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.88, 7.88, 7.88); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Head/PCS 1900 Right Cheek/Area Scan (71x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.161 W/kg


Head/PCS 1900 Right Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.055 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.251 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.159 W/kg

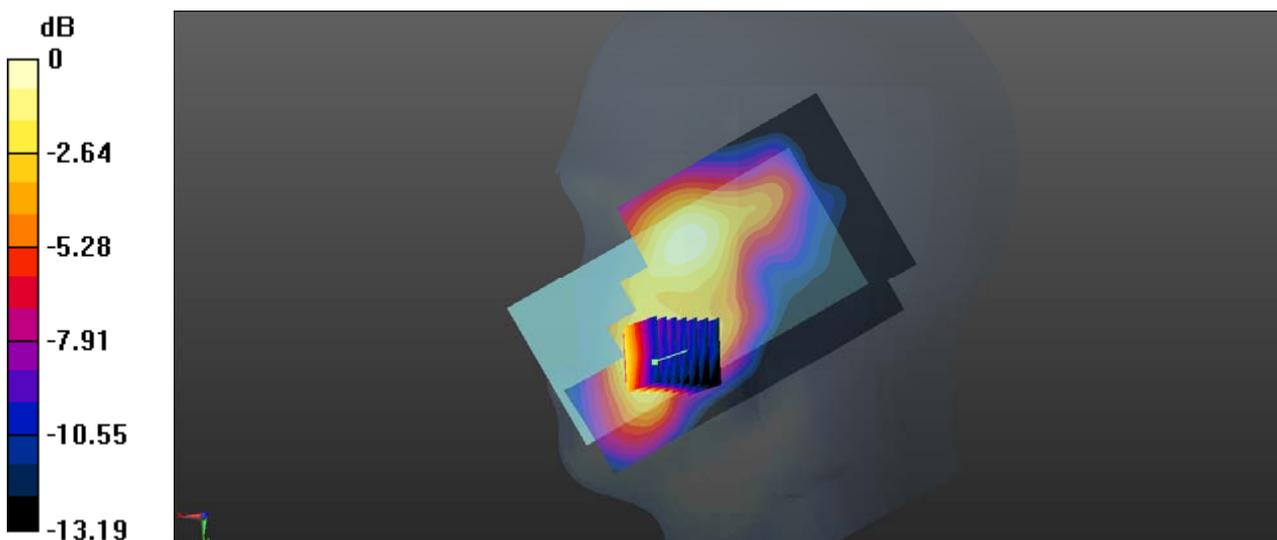

0 dB = 0.159 W/kg = -7.99 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

Test Plot 4#: PCS 1900 Back High Channel

DUT: TD-LTE Digital Mobile Phone; Type: SM801;

Communication System: Generic GPRS-3 slots; Frequency: 1909.8 MHz;Duty Cycle: 1:2.66

Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.492 \text{ S/m}$; $\epsilon_r = 53.374$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 7.56, 7.56); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Body/PCS 1900 Back/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.344 W/kg


Body/PCS 1900 Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.01 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.307 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.335 W/kg

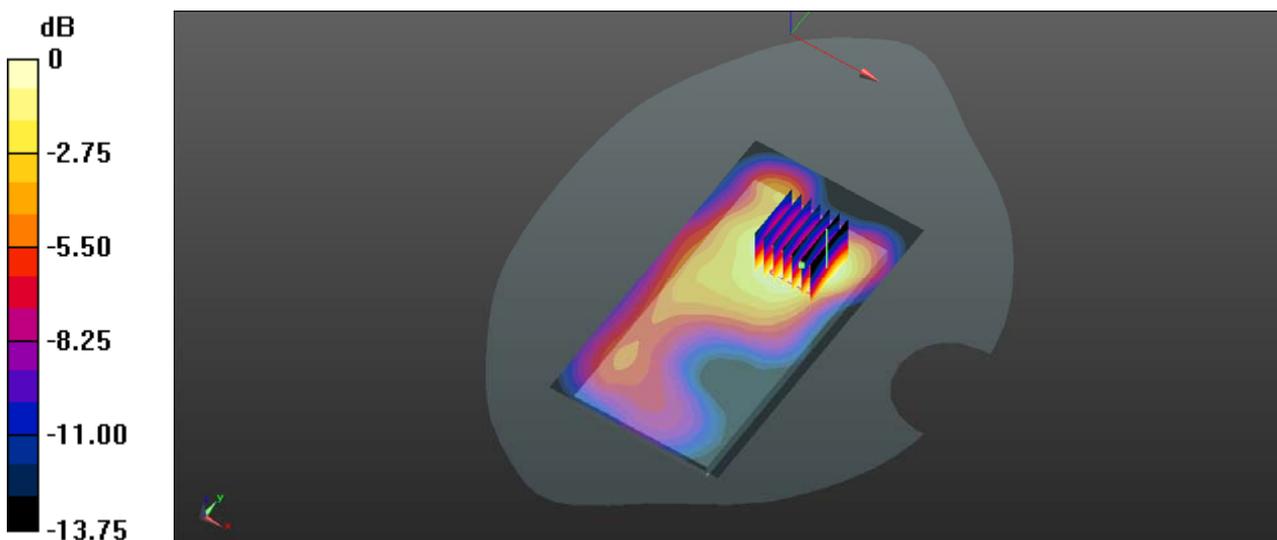

0 dB = 0.335 W/kg = -4.75 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

Test Plot 5#: WCDMA BAND 5 Right Cheek High Channel

DUT: TD-LTE Digital Mobile Phone; Type: SM801;


Communication System: BAND V; Frequency: 846.6 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.895 \text{ S/m}$; $\epsilon_r = 42.824$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.52, 9.52, 9.52); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Head/WCDMA BAND 5 Right Cheek/Area Scan (71x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.143 W/kg

Head/WCDMA BAND 5 Right Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.289 V/m; Power Drift = 0.17 dB
 Peak SAR (extrapolated) = 0.161 W/kg
SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.103 W/kg
 Maximum value of SAR (measured) = 0.140 W/kg

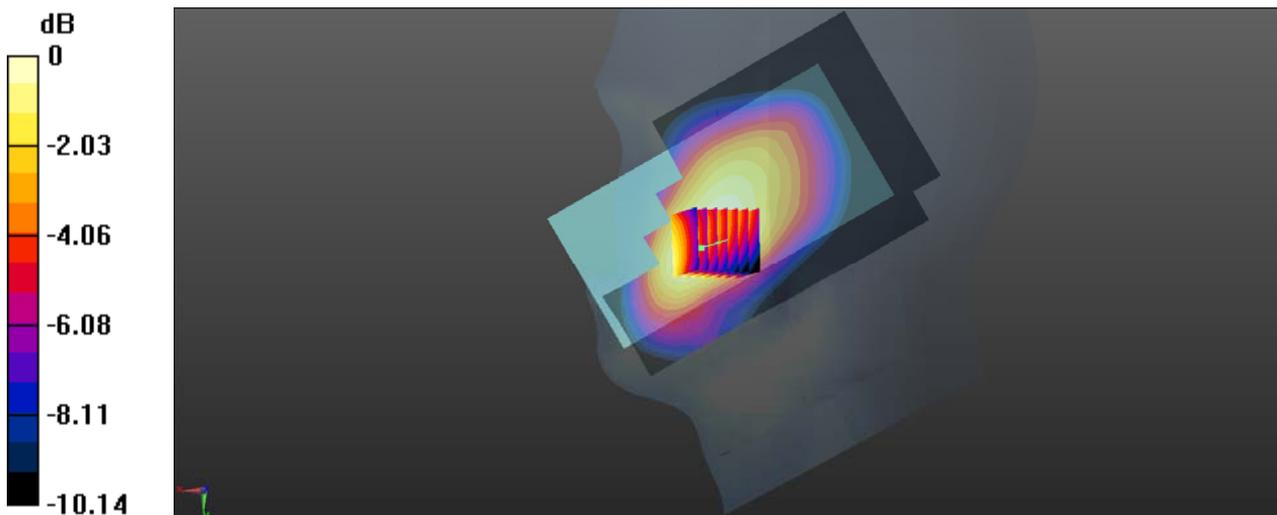

0 dB = 0.140 W/kg = -8.54 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

Test Plot 6#: WCDMA BAND 5 Back High Channel

DUT: TD-LTE Digital Mobile Phone; Type: SM801;

Communication System: BAND V; Frequency: 846.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.985 \text{ S/m}$; $\epsilon_r = 55.017$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.17, 9.17, 9.17); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Body/WCDMA BAND 5 Back/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.418 W/kg


Body/WCDMA BAND 5 Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.20 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.492 W/kg

SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 0.403 W/kg

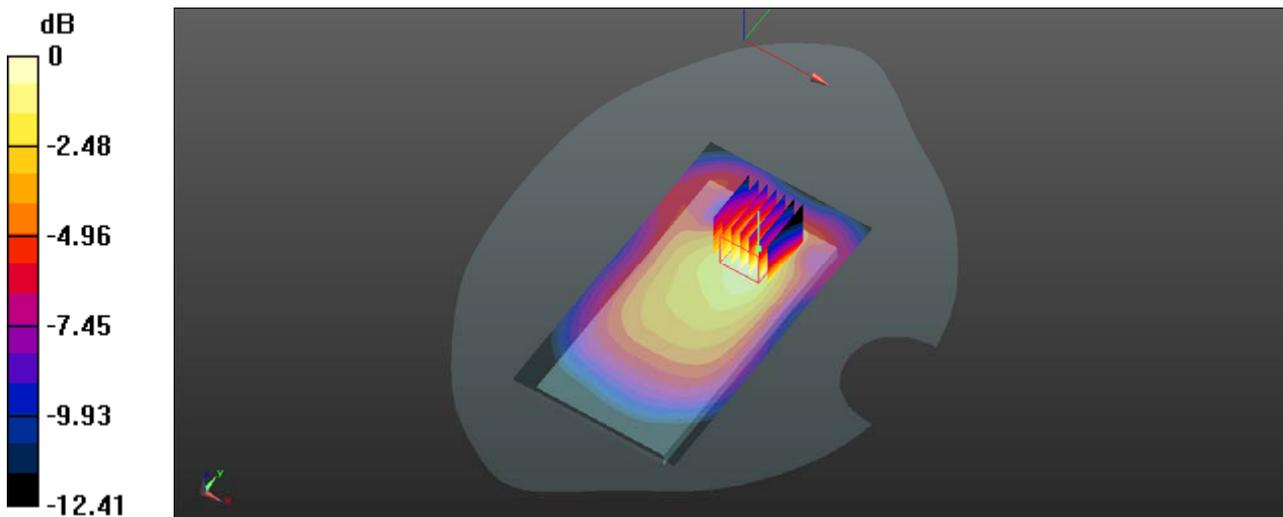

$0 \text{ dB} = 0.403 \text{ W/kg} = -3.95 \text{ dBW/kg}$

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

Test Plot 7#: WCDMA BAND 2 Right Cheek Middle Channel

DUT: TD-LTE Digital Mobile Phone; Type: SM801;

Communication System: BAND II; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.384 \text{ S/m}$; $\epsilon_r = 39.725$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.88, 7.88, 7.88); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Head/WCDMA BAND 2 Right Cheek/Area Scan (71x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.218 W/kg


Head/WCDMA BAND 2 Right Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.643 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.214 W/kg

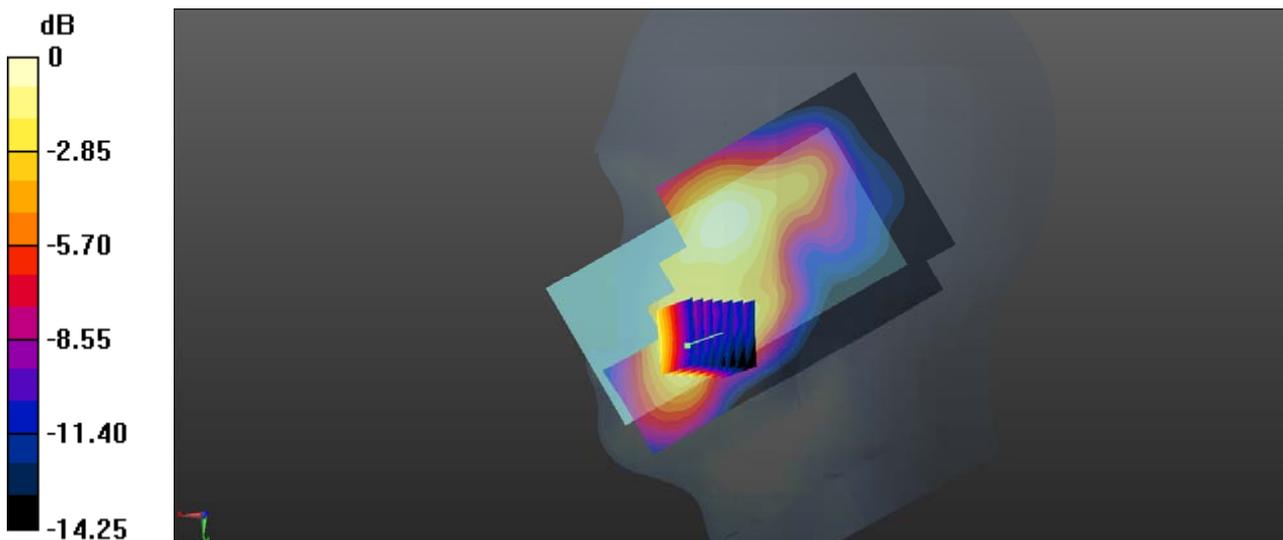

0 dB = 0.214 W/kg = -6.70 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

Test Plot 8#: WCDMA BAND 2 Back Middle Channel

DUT: TD-LTE Digital Mobile Phone; Type: SM801;


Communication System: BAND II; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.541 \text{ S/m}$; $\epsilon_r = 53.725$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 7.56, 7.56); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Body/WCDMA BAND 2 Back/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.442 W/kg

Body/WCDMA BAND 2 Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 13.64 V/m; Power Drift = -0.03 dB
 Peak SAR (extrapolated) = 0.635 W/kg
SAR(1 g) = 0.393 W/kg; SAR(10 g) = 0.239 W/kg
 Maximum value of SAR (measured) = 0.427 W/kg

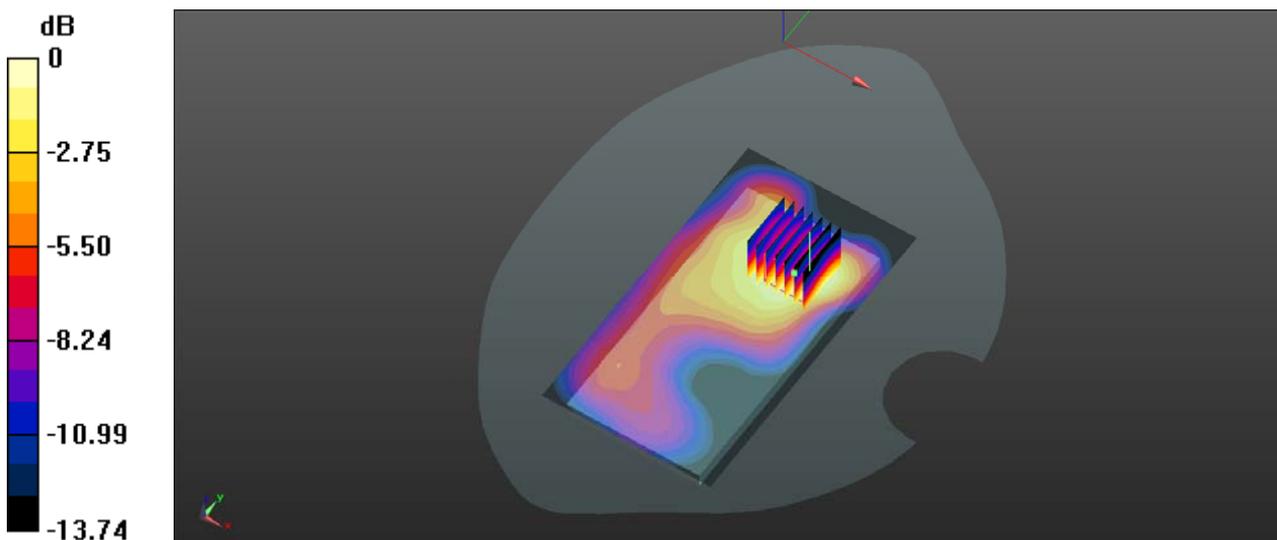

0 dB = 0.427 W/kg = -3.70 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

Test Plot 9#: CDMA 850 Right Cheek High Channel

DUT: TD-LTE Digital Mobile Phone; Type: SM801;

Communication System: Generic GSM-CDMA; Frequency: 848.31 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 848.31 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 42.749$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.52, 9.52, 9.52); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Head /CDMA 850 Right Cheek /Area Scan (71x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.167 W/kg


Head /CDMA 850 Right Cheek /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.041 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

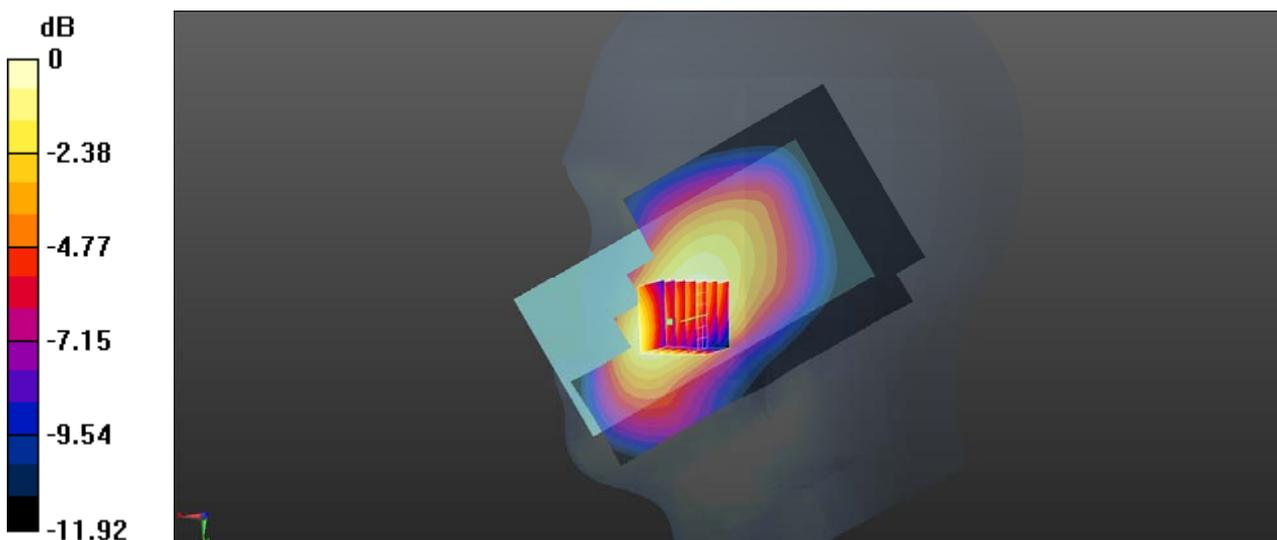

0 dB = 0.161 W/kg = -7.93 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

Test Plot 10#: CDMA 850 Back High Channel

DUT: TD-LTE Digital Mobile Phone; Type: SM801;

Communication System: Generic GSM-CDMA; Frequency: 848.31 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 848.31 \text{ MHz}$; $\sigma = 0.988 \text{ S/m}$; $\epsilon_r = 54.986$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(9.17, 9.17, 9.17); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Body/CDMA 850 Back/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.381 W/kg


Body/CDMA 850 Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.94 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.452 W/kg

SAR(1 g) = 0.350 W/kg; SAR(10 g) = 0.246 W/kg

Maximum value of SAR (measured) = 0.378 W/kg

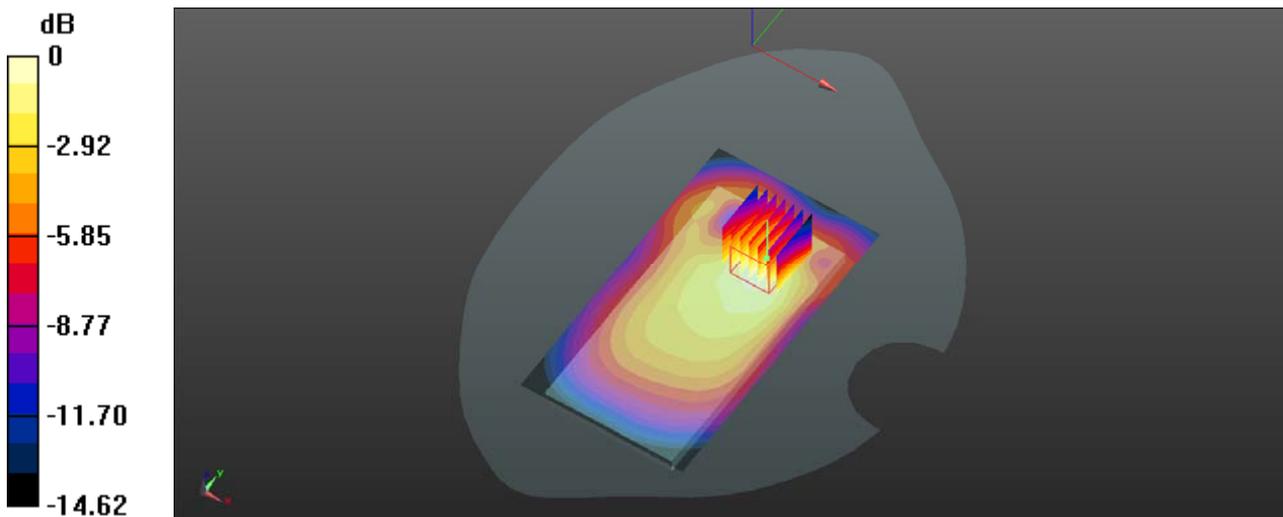

$0 \text{ dB} = 0.378 \text{ W/kg} = -4.23 \text{ dBW/kg}$

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

Test Plot 11#: CDMA 1900 Right Cheek Low Channel

DUT: TD-LTE Digital Mobile Phone; Type: SM801;

Communication System: Generic GSM-CDMA; Frequency: 1851.25 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1851.25$ MHz; $\sigma = 1.385$ S/m; $\epsilon_r = 39.868$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.88, 7.88, 7.88); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Head/CDMA 1900 Right Cheek /Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.260 W/kg


Head/CDMA 1900 Right Cheek /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.001 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.402 W/kg

SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.261 W/kg

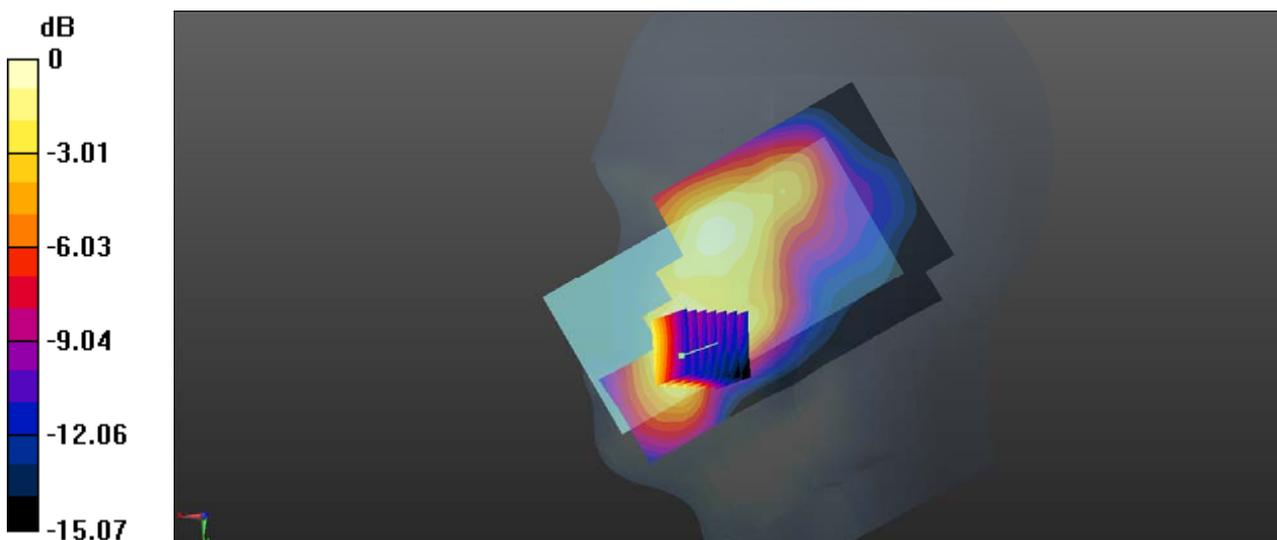

0 dB = 0.261 W/kg = -5.83 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

Test Plot 12#: CDMA 1900 Back Low Channel

DUT: TD-LTE Digital Mobile Phone; Type: SM801;

Communication System: Generic GSM-CDMA; Frequency: 1851.25 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1851.25 \text{ MHz}$; $\sigma = 1.479 \text{ S/m}$; $\epsilon_r = 55.351$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 7.56, 7.56); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Body/CDMA 1900 Back/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.303 W/kg


Body/CDMA 1900 Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.00 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.536 W/kg

SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.156 W/kg

Maximum value of SAR (measured) = 0.326 W/kg

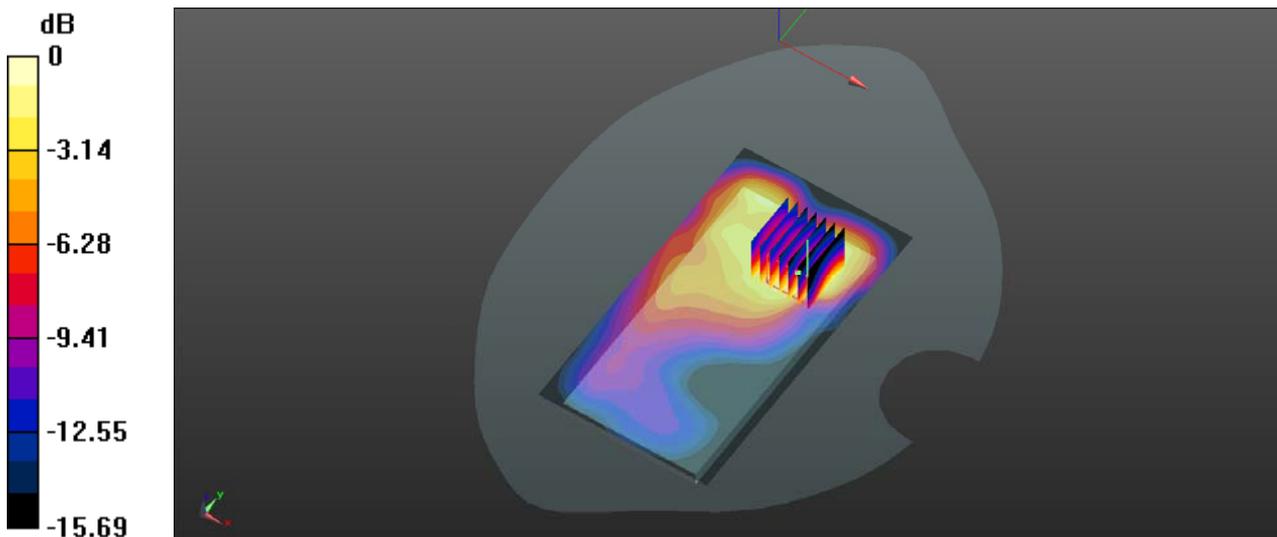

0 dB = 0.326 W/kg = -4.87 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

Test Plot 13#: LTE Band 2 Right Cheek High Channel

DUT: TD-LTE Digital Mobile Phone; Type: SM801;


Communication System: Generic LTE; Frequency: 1900 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 39.676$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.88, 7.88, 7.88); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Head/LTE Band 2 Right Cheek/Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.232 W/kg

Head/LTE Band 2 Right Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.755 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.376 W/kg
SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.120 W/kg
Maximum value of SAR (measured) = 0.231 W/kg

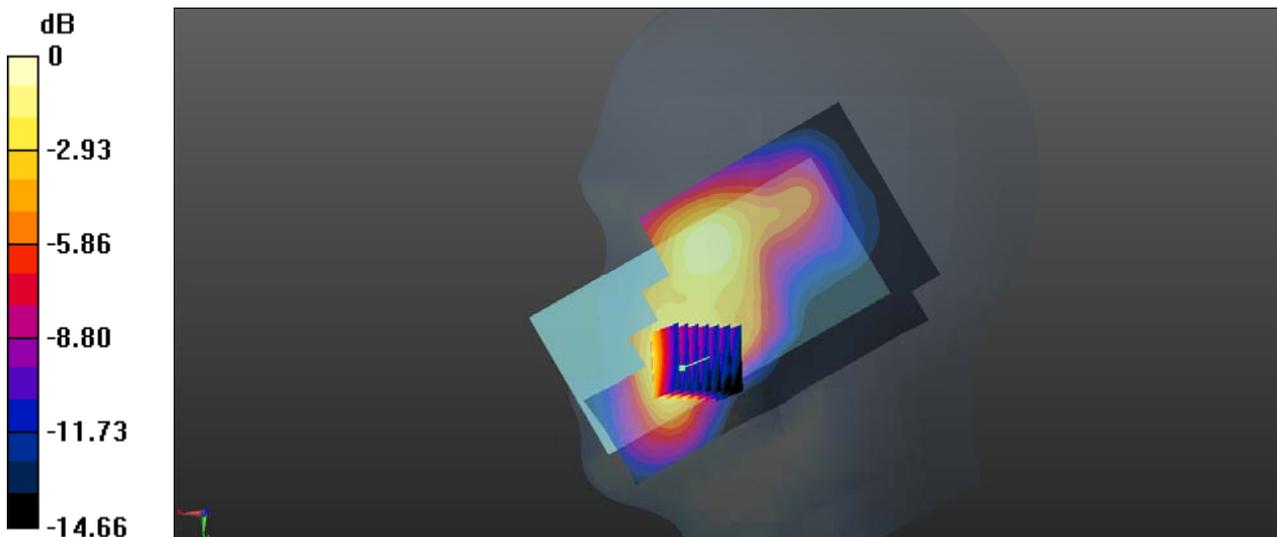

0 dB = 0.231 W/kg = -6.36 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

Test Plot 14#: LTE Band 2 Back High Channel

DUT: TD-LTE Digital Mobile Phone; Type: SM801;


Communication System: Generic LTE; Frequency: 1900MHz;Duty Cycle: 1:1
 Medium parameters used: f = 1900 MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 54.193$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 7.56, 7.56); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Body/LTE Band 2 Back/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.262 W/kg

Body/LTE Band 2 Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 10.66 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 0.379 W/kg
SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.138 W/kg
 Maximum value of SAR (measured) = 0.242 W/kg

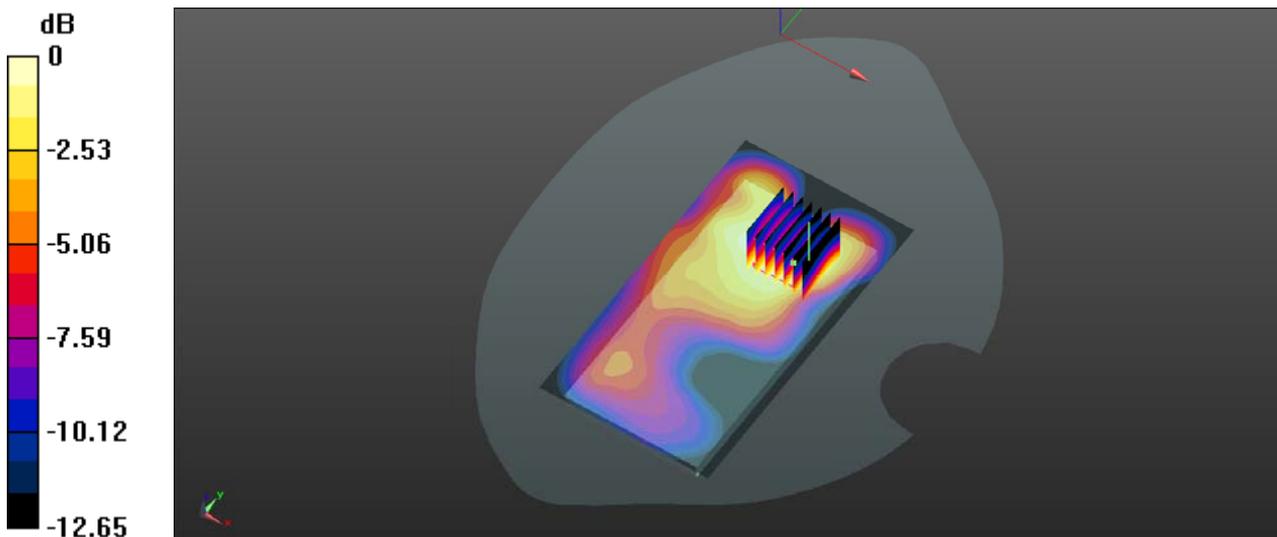

0 dB = 0.242 W/kg = -6.16 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

Test Plot 15#: LTE Band 4 Left Cheek High Channel

DUT: TD-LTE Digital Mobile Phone; Type: SM801;


Communication System: Generic LTE; Frequency: 1745MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.383 \text{ S/m}$; $\epsilon_r = 40.33$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.88, 7.88, 7.88); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Head/LTE Band 4 Left Cheek/Area Scan (71x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.217 W/kg

Head/LTE Band 4 Left Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 5.042 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 0.340 W/kg
SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.129 W/kg
Maximum value of SAR (measured) = 0.227 W/kg

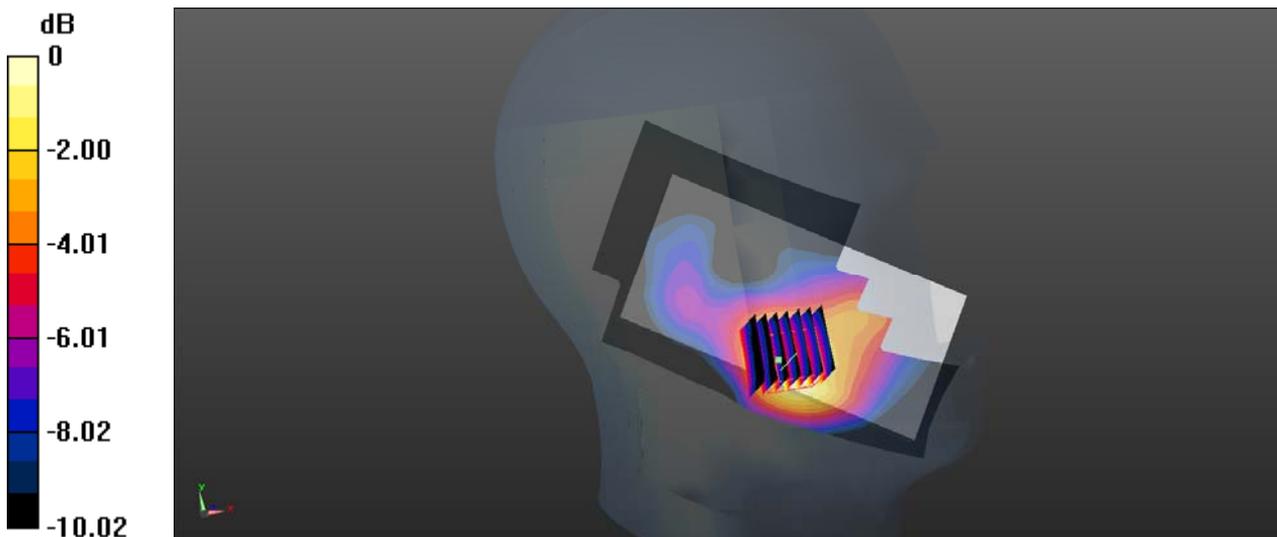

0 dB = 0.227 W/kg = -6.44 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

Test Plot 16#: LTE Band 4 Back High Channel

DUT: TD-LTE Digital Mobile Phone; Type: SM801;


Communication System: Generic LTE; Frequency: 1745MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.488 \text{ S/m}$; $\epsilon_r = 53.292$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.85, 7.85, 7.85); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Body/LTE Band 4 Back/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.532 W/kg

Body/LTE Band 4 Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 12.58 V/m; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 0.661 W/kg
SAR(1 g) = 0.431 W/kg; SAR(10 g) = 0.262 W/kg
 Maximum value of SAR (measured) = 0.468 W/kg

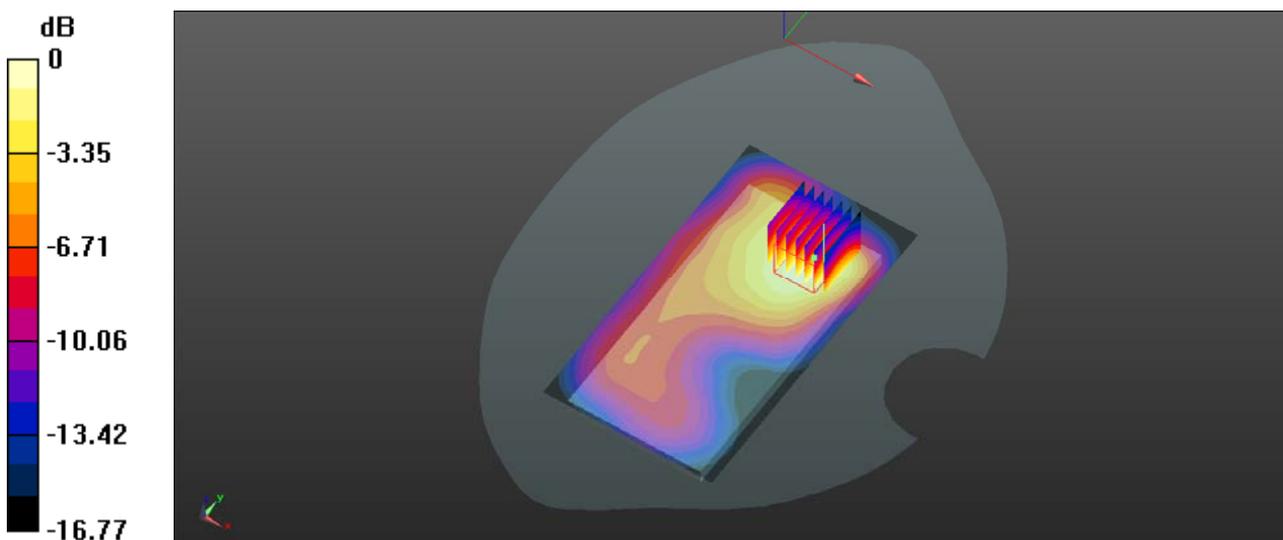

0 dB = 0.468 W/kg = -3.30 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

Test Plot 17#: WLAN Left Cheek Middle Channel

DUT: TD-LTE Digital Mobile Phone; Type: SM801;

Communication System: CW; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.819$ S/m; $\epsilon_r = 39.18$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.2, 7.2, 7.2); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Head /WLAN Left Cheek/Area Scan (111x171x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.516 W/kg


Head /WLAN Left Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.38 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.766 W/kg

SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.224 W/kg

Maximum value of SAR (measured) = 0.504 W/kg

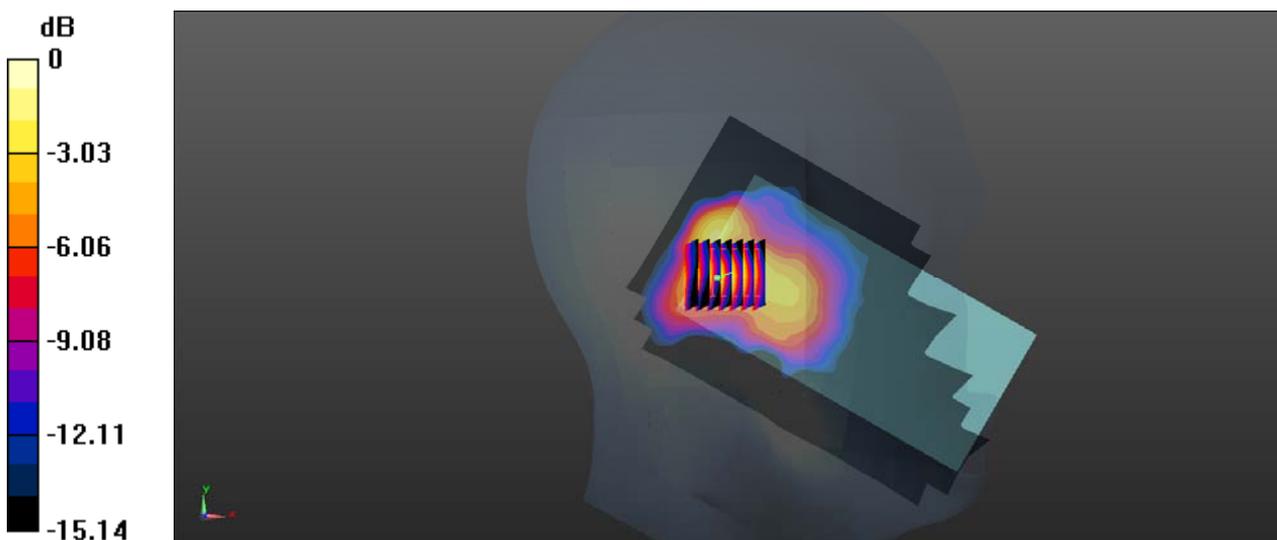

0 dB = 0.504 W/kg = -2.98 dBW/kg

Test Laboratory: Bay Area Compliance Labs Corp.(Dongguan)

Test Plot 18#: WLAN Back Middle Channel

DUT: TD-LTE Digital Mobile Phone; Type: SM801;

Communication System: CW; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.979$ S/m; $\epsilon_r = 51.625$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.2, 7.2, 7.2); Calibrated: 2015/2/5;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1459; Calibrated: 2015/9/18
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.8 (8);

Body/WLAN Back/Area Scan (101x171x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.395 W/kg


Body/WLAN Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.868 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.582 W/kg

SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.397 W/kg

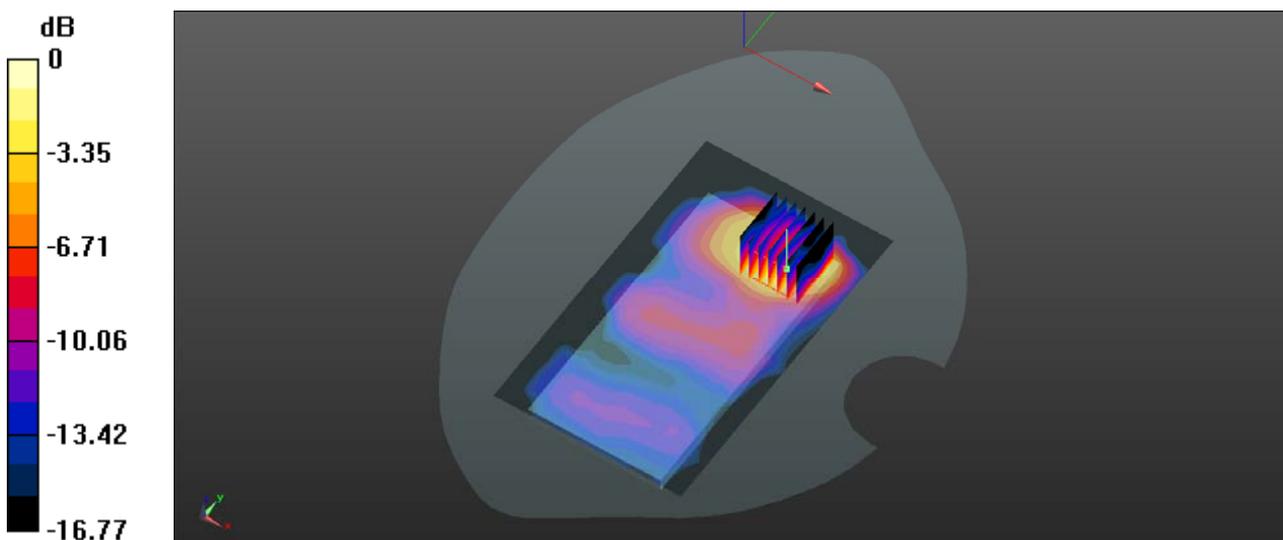

0 dB = 0.397 W/kg = -4.01 dBW/kg

APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

Measurement uncertainty evaluation for IEEE1528-2013 SAR test

Source of uncertainty	Tolerance/uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)
Measurement system							
Probe calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	√3	0	0	0.0	0.0
Boundary effect	1.0	R	√3	1	1	0.6	0.6
Linearity	4.7	R	√3	1	1	2.7	2.7
Detection limits	1.0	R	√3	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	√3	1	1	0.0	0.0
Integration time	0.0	R	√3	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	√3	1	1	0.6	0.6
RF ambient conditions–reflections	1.0	R	√3	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	√3	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	√3	1	1	3.9	3.9
Post-processing	2.0	R	√3	1	1	1.2	1.2
Test sample related							
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Device holder uncertainty	6.3	N	1	1	1	6.3	6.3
Drift of output power	5.0	R	√3	1	1	2.9	2.9
Phantom and set-up							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	√3	1	1	2.3	2.3
Liquid conductivity target)	5.0	R	√3	0.64	0.43	1.8	1.2
Liquid conductivity meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity target)	5.0	R	√3	0.6	0.49	1.7	1.4
Liquid permittivity meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Combined standard uncertainty		RSS				12.2	12.0
Expanded uncertainty 95 % confidence interval)						24.3	23.9

Measurement uncertainty evaluation for IEC62209-2 SAR test

Source of uncertainty	Tolerance/uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)
Measurement system							
Probe calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	√3	0	0	0.0	0.0
Linearity	4.7	R	√3	1	1	2.7	2.7
Modulation Response	0.0	R	√3	1	1	0.0	0.0
Detection limits	1.0	R	√3	1	1	0.6	0.6
Boundary effect	1.0	R	√3	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	√3	1	1	0.0	0.0
Integration time	0.0	R	√3	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	√3	1	1	0.6	0.6
RF ambient conditions–reflections	1.0	R	√3	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	√3	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	√3	1	1	3.9	3.9
Post-processing	2.0	R	√3	1	1	1.2	1.2
Test sample related							
Device holder Uncertainty	6.3	N	1	1	1	6.3	6.3
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Power scaling	4.5	R	√3	1	1	2.6	2.6
Drift of output power	5.0	R	√3	1	1	2.9	2.9
Phantom and set-up							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	√3	1	1	2.3	2.3
Algorithm for correcting SAR for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.1	0.9
Liquid conductivity (meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity (meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Temp. unc. - Conductivity	1.7	R	√3	0.78	0.71	0.8	0.7
Temp. unc. - Permittivity	0.3	R	√3	0.23	0.26	0.0	0.0
Combined standard uncertainty		RSS				12.2	12.1
Expanded uncertainty 95 % confidence interval)						24.5	24.2

APPENDIX B CALIBRATION CERTIFICATES

Please Refer to the Attachment(Attachment B).

APPENDIX C EUT TEST POSITION PHOTOS

Please Refer to the Attachment(Attachment C-B).

******* END OF REPORT *******