

# FCC Test Report

Report No.: AGC15705230964FR01

FCC ID	:	2AEVN0754YD005
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	R/C CAR
BRAND NAME	:	N/A
MODEL NAME	:	See page 4
APPLICANT	:	Guangdong ATTOP Technology Co., Ltd
DATE OF ISSUE	:	Oct. 09, 2023
STANDARD(S) TEST PROCEDURE(S)	:	FCC Part 15 Subpart C §15.249
<b>REPORT VERSION</b>	:	V1.0







#### **REPORT REVISE RECORD**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Oct. 09, 2023	Valid	Initial Release



#### TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCY	
2.3. ANTENNA REQUIREMENT	6
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF EUT SYSTEM	10
5.2 EQUIPMENT USED IN TESTED SYSTEM	
5.3. SUMMARY OF TEST RESULTS	10
6. TEST FACILITY	11
7. RADIATED EMISSION	
7.1. TEST LIMIT	
7.2. MEASUREMENT PROCEDURE	
7.3. TEST SETUP	
7.4. TEST RESULT	
8. BAND EDGE EMISSION	
8.1. MEASUREMENT PROCEDURE	
8.2. TEST SETUP	
8.3 RADIATED TEST RESULT	
9. 20DB BANDWIDTH	
9.1. MEASUREMENT PROCEDURE	
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
9.3. MEASUREMENT RESULTS	
10. FCC LINE CONDUCTED EMISSION TEST	
10.1. LIMITS OF LINE CONDUCTED EMISSION TEST	
10.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	
10.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	
10.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 10.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	
APPENDIX B: PHOTOGRAPHS OF THE EUT	



# **1. VERIFICATION OF CONFORMITY**

Applicant	Guangdong ATTOP Technology Co., Ltd		
Address	Linghai Industry Zone, Laimei Road, Chenghai District, Shantou, Guangdong, China		
Manufacturer	Guangdong ATTOP Technology Co., Ltd		
Address	Linghai Industry Zone, Laimei Road, Chenghai District, Shantou, Guangdong, China		
Factory	Guangdong ATTOP Technology Co., Ltd		
Address	Linghai Industry Zone, Laimei Road, Chenghai District, Shantou, Guangdong, China		
Product Designation	R/C CAR		
Brand Name	N/A		
Test Model	YD-005		
Series Model	See page 5		
Difference Description	All the series models are the same as the test model except for the model names and the color of appearance.		
Date of receipt of test item	Sep. 27, 2023		
Date of test	Sep. 27, 2023 to Oct. 09, 2023		
Deviation	No any deviation from the test method		
Condition of Test Sample	Normal		
Test Result	Pass		
Report Template	AGCRT-US-SRD/RF		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Prepared By Sky Zhou Oct. 09, 2023 (Project Engineer) in. Reviewed By Calvin Liu Oct. 09, 2023 (Reviewer) Zhan Approved By Max Zhang Oct. 09, 2023 (Authorized Officer)



# 2. GENERAL INFORMATION

# 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2404MHz-2478MHz	
Maximum field strength79.12dBµV/m(Peak)@3m62.94dBµV/m(Average)@3m		
Modulation	GFSK	
Number of channels	20 Channels	
Antenna Gain 0dBi		
Antenna Designation Wire Antenna		
Hardware Version	ve Version V1.0	
Software Version V1.0		
Power Supply	DC 3V by battery	

	YD-001, YD-002, YD-003, YD-006, YD-007, YD-008, YD-010, YD-011, YD-012,
Series Model	YD-013, YD-015, YD-016, YD-017, YD-018, YD-019, YD-020, YD-021, YD-022,
	YD-023, YD-025, YD-026, YD-027, YD-028, YD-029, YD-030



#### 2.2. TABLE OF CARRIER FREQUENCY

Channel Number	Frequency (MHZ)
01	2404
02	2405
03	2410
04	2414
05	2418
06	2422
07	2426
08	2430
09	2434
10	2438
11	2442
12	2446
13	2450
14	2454
15	2458
16	2462
17	2466
18	2470
19	2474
20	2478



# 2.3. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



# **3. MEASUREMENT UNCERTAINTY**

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, Uc = ±2.9 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.9 dB
- Uncertainty of Occupied Channel Bandwidth: Uc =  $\pm 2$  %



# 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION			
1	Low channel TX_2404MHz_GFSK			
2	Middle channel TX_2446MHz_GFSK			
3	High channel TX_2478MHz_GFSK			
Note:				
1. Al	1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if			

no other cases.

- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. Set the EUT into the individual test modes by pressing the EUT buttons.
- 4. For battery operated equipment, the equipment tests are performed using a new battery.



# 5. SYSTEM TEST CONFIGURATION

# **5.1. CONFIGURATION OF EUT SYSTEM**

Configure:



## **5.2 EQUIPMENT USED IN TESTED SYSTEM**

ltem	Equipment	Model No.	ID or Specification	Remark
1	R/C CAR	YD-005	2AEVN0754YD005	EUT

## **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249&15.209	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.215	20dB bandwidth	Compliant
§15.207	Conducted Emission	Not applicable

Note: The conducted emission tests at AC port are not required for devices which only employ battery power for operation.



# 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Commu Fuhai Street, Bao'an District, Shenzhen, Guangdong, China			
Designation Number	CN1259		
FCC Test Firm Registration Number	975832		
A2LA Cert. No.	5054.02		
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA		

## TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
Signal Analyzer	Aglient	N9020A	MY52090123	Jun. 01, 2023	May 31, 2024
EXA Signal Analyzer	Agilent	N9010A	MY53470504	Jun. 01, 2023	May 31, 2024
2.4GHz Filter	EM Electronics	N/A	N/A	Mar. 18, 2022	Mar. 19, 2024
Horn Antenna	SCHWARZBEC	BBHA9170	768	Oct. 31, 2021	Oct. 30, 2023
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS	3117	00034609	Mar. 23, 2023	Mar. 22, 2024
Preamplifer	ETS	3117-PA	00246148	Aug. 04, 2022	Aug. 03, 2024
Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 05, 2023	Jan. 04, 2024
Test Software	Tonscend	4.0.0.0	N/A	N/A	N/A



# 7. RADIATED EMISSION

## 7.1. TEST LIMIT

# Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics
	(millivolts/meter)	(microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

#### Standard FCC 15.209

Frequency	Distance	Field Strengths Limit				
(MHz)	Meters	<b>μ V/m</b>	dB(µV)/m			
0.009 ~ 0.490	300	2400/F(kHz)				
0.490 ~ 1.705	30	24000/F(kHz)				
1.705 ~ 30	30	30				
30 ~ 88	3	100	40.0			
88 ~ 216	3	150	43.5			
216 ~ 960	3	200	46.0			
960 ~ 1000	3	500	54.0			
Above 1000	3	Other:74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average)				
Remark: (1) Emission le	evel dB $\mu$ V = 20 log Emission	n level μV/m.				

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



# 7.2. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use minimum resolution bandwidth of 1 MHz. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
	1GHz~26.5GHz
Start ~Stop Frequency	RBW 2.4MHz/ VBW 8MHz for Peak,
	RBW 2.4MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




# 7.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

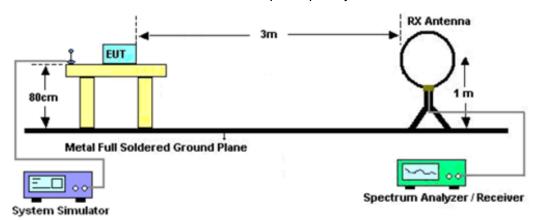

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

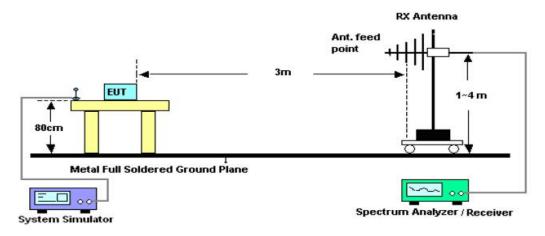

# RADIATED EMISSION TEST SETUP ABOVE 1000MHz

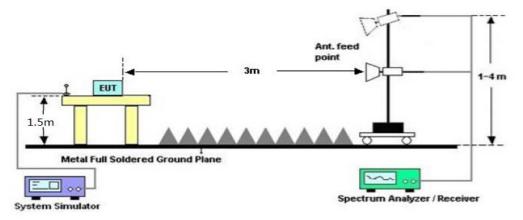




# 7.4. TEST RESULT

## **RADIATED EMISSION BELOW 30MHZ**

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

EUT	R/C CAR	Model Name	YD-005		
Temperature	23.1°C	Relative Humidity	59.3%		
Pressure	985kPa	Test Voltage	DC 3V		
Test Mode	Mode 3	Polarization	Horizontal		



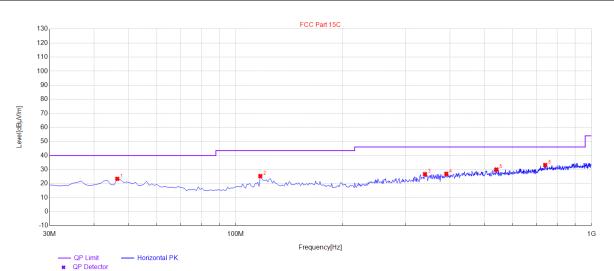


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	46.49	23.36	14.96	40.00	16.64	100	60	Horizontal
2	117.3	25.36	13.89	43.50	18.14	100	360	Horizontal
3	340.4	26.70	18.27	46.00	19.30	100	340	Horizontal
4	390.84	26.92	19.45	46.00	19.08	100	290	Horizontal
5	540.22	30.01	22.58	46.00	15.99	100	230	Horizontal
6	741.01	33.20	26.85	46.00	12.80	100	310	Horizontal

## **RESULT: PASS**



EUT	R/C CAR	Model Name	YD-005
Temperature	23.1°C	Relative Humidity	59.3%
Pressure	985kPa	Test Voltage	DC 3V
Test Mode	Mode 3	Polarization	Vertical

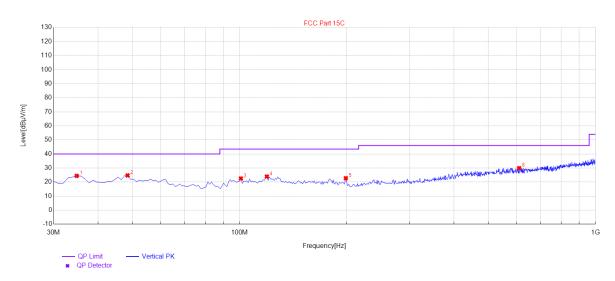

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	34.85	24.45	13.81	40.00	15.55	100	40	Vertical
2	48.43	24.73	15.14	40.00	15.27	100	70	Vertical
3	100.81	22.56	12.23	43.50	20.94	100	350	Vertical
4	119.24	23.98	14.04	43.50	19.52	100	210	Vertical
5	198.78	22.75	13.47	43.50	20.75	100	290	Vertical
6	610.06	29.93	24.43	46.00	16.07	100	80	Vertical

#### **RESULT: PASS**

Note: Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been tested. The mode 3 is the worst case and recorded in the report.



EUT	R/C CAR	Model Name	YD-005
Temperature	22.9°C	Relative Humidity	57.3%
Pressure	985kPa	Test Voltage	DC 3V
Test Modulation	GFSK	Polarization	Horizontal

# FIELD STRENGTH OF FUNDAMENTAL

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
2404	27.89	49.05	76.94	114.00	-37.06	peak	
2404	12.09	49.05	61.14	94.00	-32.86	AVG	
2446	28.23	49.12	77.35	114.00	-36.65	peak	
2446	12.30	49.12	61.42	94.00	-32.58	AVG	
2478	29.87	49.25	79.12	114.00	-34.88	peak	
2478 13.69 49.25 62.94 94.00 -31.06 AVG							
Remark:							
Factor = Ante	Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	R/C CAR	Model Name	YD-005
Temperature	22.9°C	Relative Humidity	57.3%
Pressure	985kPa	Test Voltage	DC 3V
Test Modulation	GFSK	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
2404	44.37	49.05	75.71	114.00	-38.29	peak	
2404	29.51	49.05	60.07	94.00	-33.93	AVG	
2446	45.31	49.12	74.93	114.00	-39.07	peak	
2446	30.11	49.12	59.27	94.00	-34.73	AVG	
2478	40.78	49.25	75.09	114.00	-38.91	peak	
2478 30.48 49.25 59.42 94.00 -34.58							
Remark:							
Factor = Ante	Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



#### **RADIATED EMISSION ABOVE 1GHZ**

EUT	R/C CAR	Model Name	YD-005
Temperature	23.1°C	Relative Humidity	59.3%
Pressure	985kPa	Test Voltage	DC 3V
Test Mode	Mode 1	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4808	50.38	3.76	54.14	74.00	-19.86	peak
4808	39.61	3.76	43.37	54.00	-10.63	AVG
7212	47.70	8.17	55.87	74.00	-18.13	peak
7212	37.69	8.17	45.86	54.00	-8.14	AVG
Remark:					-	
$actor = \Delta nter$	na Factor + Cabl	e Loss – Pre-	amplifier			

Antenna Facto Pre-ampliller Factor

EUT	R/C CAR	Model Name	YD-005
Temperature	23.1°C	Relative Humidity	59.3%
Pressure	985kPa	Test Voltage	DC 3V
Test Mode	Mode 1	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4808	48.69	3.76	52.45	74.00	-21.55	peak
4808	37.41	3.76	41.17	54.00	-12.83	AVG
7212	46.53	8.17	54.70	74.00	-19.30	peak
7212	35.75	8.17	43.92	54.00	-10.08	AVG
Remark:						
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			



EUT	R/C CAR	Model Name	YD-005
Temperature	23.1°C	Relative Humidity	59.3%
Pressure	985kPa	Test Voltage	DC 3V
Test Mode	Mode 2	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4892	49.67	3.78	53.45	74.00	-20.55	peak
4892	37.14	3.78	40.92	54.00	-13.08	AVG
7338	46.48	8.23	54.71	74.00	-19.29	peak
7338	35.73	8.23	43.96	54.00	-10.04	AVG
emark:	·					

EUT	R/C CAR	Model Name	YD-005
Temperature	23.1°C	Relative Humidity	59.3%
Pressure	985kPa	Test Voltage	DC 3V
Test Mode	Mode 2	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
4892	47.34	3.78	51.12	74.00	-22.88	peak
4892	36.17	3.78	39.95	54.00	-14.05	AVG
7338	45.43	8.23	53.66	74.00	-20.34	peak
7338	35.16	8.23	43.39	54.00	-10.61	AVG
7338 emark:	35.16	8.23	43.39	54.00	-10.61	

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT	R/C CAR	Model Name	YD-005
Temperature	23.1°C	Relative Humidity	59.3%
Pressure	985kPa	Test Voltage	DC 3V
Test Mode	Mode 3	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4956	49.81	3.81	53.62	74.00	-20.38	peak
4956	39.62	3.81	43.43	54.00	-10.57	AVG
7434	47.16	8.27	55.43	74.00	-18.57	peak
7434	37.59	8.27	45.86	54.00	-8.14	AVG
emark:						
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

EUT	R/C CAR	Model Name	YD-005
Temperature	23.1°C	Relative Humidity	59.3%
Pressure	985kPa	Test Voltage	DC 3V
Test Mode	Mode 3	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4956	46.53	3.81	50.34	74.00	-23.66	peak
4956	37.48	3.81	41.29	54.00	-12.71	AVG
7434	44.31	8.27	52.58	74.00	-21.42	peak
7434	35.86	8.27	44.13	54.00	-9.87	AVG
Remark:			-			
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

#### **RESULT: PASS**

Note: The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Emission Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



# 8. BAND EDGE EMISSION

## 8.1. MEASUREMENT PROCEDURE


1. The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.

2. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=1MHz, VBW=3MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz; VBW=3MHz / Sweep=AUTO

3. Other procedures refer to clause 7.2.

# 8.2. TEST SETUP

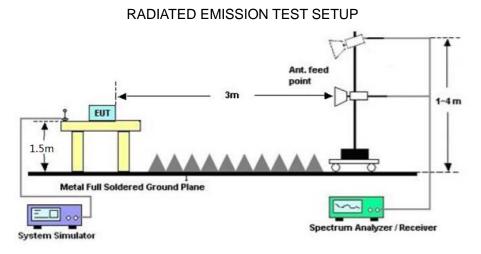

## **8.3 RADIATED TEST RESULT**


Note:

1. Factor=Antenna Factor + Cable loss - Amplifier gain. Field Strength=Factor + Reading level

2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB( $\mu$ V) to represent the Amplitude. Use the F dB( $\mu$ V/m) to represent the Field Strength. So A=F.




EUT	R/C CAR	Model Name	YD-005
Temperature	23.1°C	Relative Humidity	59.3%
Pressure	985kPa	Test Voltage	DC 3V
Test Mode	Mode 1	Polarization	Horizontal

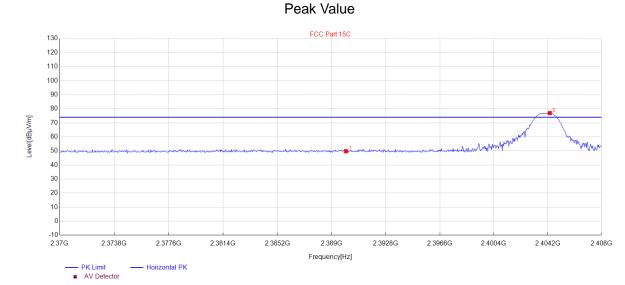

NO	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.008	49.84	34.40	74.00	24.16	150	10	Horizontal
2	2404.3483	76.94	34.44	74.00	-2.94	150	287	Horizontal



## Average Value

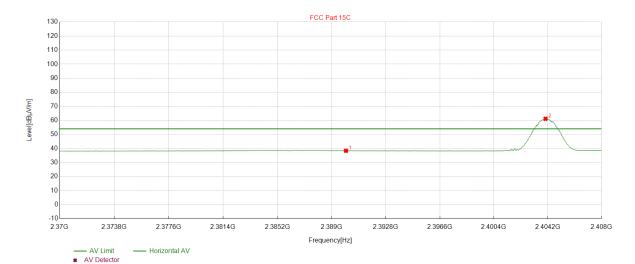


NO	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.008	38.36	34.40	54.00	15.64	150	136	Horizontal
2	2404.044	61.14	34.44	54.00	-7.14	150	289	Horizontal



EUT	R/C CAR	Model Name	YD-005
Temperature	23.1°C	Relative Humidity	59.3%
Pressure	985kPa	Test Voltage	DC 3V
Test Mode	Mode 1	Polarization	Vertical


Peak Value

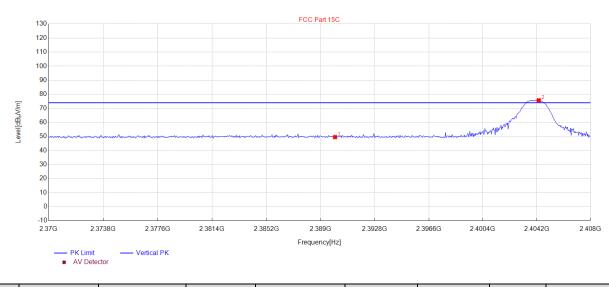

NO Freq. Level Factor Limit Margin Height Angle Polarity [dBµV/m] [dB] [dBµV/m] [dB] [°] [MHz] [cm] . 1 2390.008 49.52 34.40 74.00 24.48 150 11 Vertical 2 2404.3483 34.44 74.00 -1.71 150 347 75.71 Vertical



## Average Value

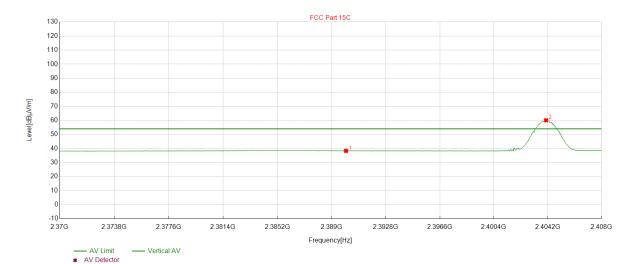


NO	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.008	38.31	34.40	54.00	15.69	150	278	Vertical
2	2404.0821	60.07	34.44	54.00	-6.07	150	346	Vertical



EUT	R/C CAR	Model Name	YD-005
Temperature	23.1°C	Relative Humidity	59.3%
Pressure	985kPa	Test Voltage	DC 3V
Test Mode	Mode 3	Polarization	Horizontal


Peak Value

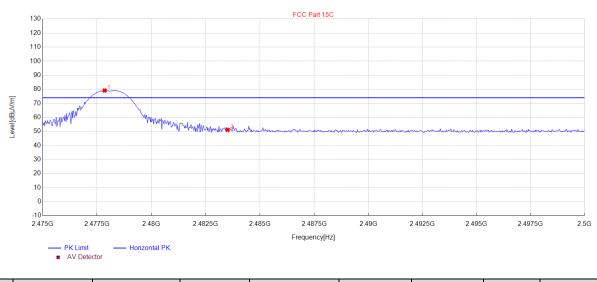

NO	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2477.8529	79.12	34.65	74.00	-5.12	150	202	Horizontal
2	2483.5085	51.15	34.66	74.00	22.85	150	28	Horizontal



## Average Value

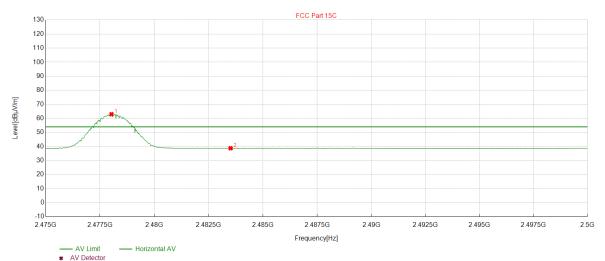


*	AV	Detector		

	NO	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
ſ	1	2478.028	62.94	34.65	54.00	-8.94	150	205	Horizontal
	2	2483.5085	38.74	34.66	54.00	15.26	150	230	Horizontal



EUT	R/C CAR	Model Name	YD-005
Temperature	23.1°C	Relative Humidity	59.3%
Pressure	985kPa	Test Voltage	DC 3V
Test Mode	Mode 3	Polarization	Vertical


Peak Value

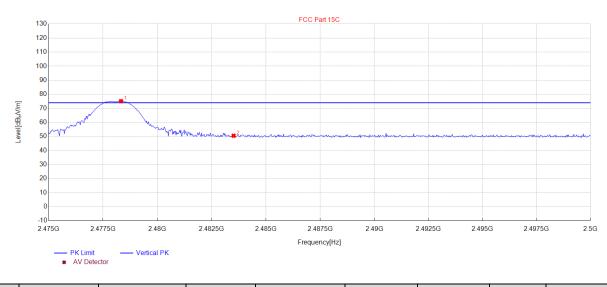

NO	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2478.3283	75.09	34.65	74.00	-1.09	150	275	Vertical
2	2483.5085	50.48	34.66	74.00	23.52	150	63	Vertical



## Average Value

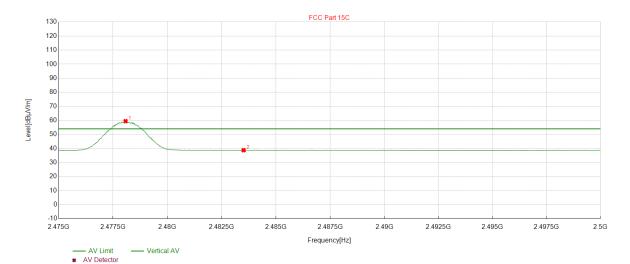

NO	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2478.0781	59.42	34.65	54.00	-5.42	150	272	Vertical
2	2483.5085	38.76	34.66	54.00	15.24	150	14	Vertical




# 9. 20DB BANDWIDTH

## 9.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set SPA Centre Frequency = Operation Frequency, RBW= 30kHz, VBW≥1×RBW.
- 3. Set SPA Trace 1 Max hold, then View.

#### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

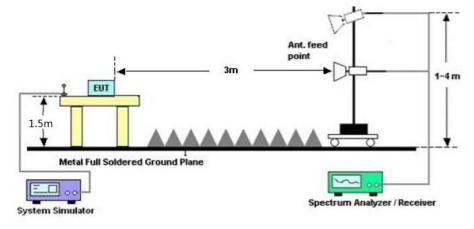




#### 9.3. MEASUREMENT RESULTS

TEST ITEM	20DB BANDWIDTH
TEST MODULATION	GFSK

Test Channel (MHz)	20DB BANDWIDTH (MHz)	99% BANDWIDTH (MHz)	Criteria
2404	1.265	1.1508	PASS
2446	1.262	1.1638	PASS
2478	1.265	1.1737	PASS

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL









## TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL





# **10. FCC LINE CONDUCTED EMISSION TEST**


# **10.1. LIMITS OF LINE CONDUCTED EMISSION TEST**

Frequency	Maximum RF Line Voltage		
Frequency	Q.P.(dBuV)	Average(dBuV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

## **10.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST**

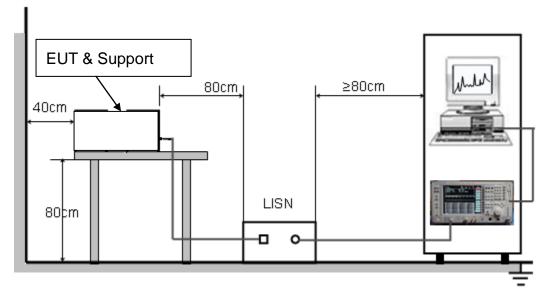



# **10.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST**

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

## 10.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

## 10.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Note: The conducted emission tests at AC port are not required for devices which only employ battery power for operation.



Report No.: AGC15705230964FR01 Page 36 of 36

# APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC15705230964AP01

# APPENDIX B: PHOTOGRAPHS OF THE EUT

Refer to the Report No.: AGC15705230964AP02

----END OF REPORT----

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



# Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.