

9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

9.5.1 Applicable Standard

According to FCC Part 15.247(b)(1)

According to RSS-247.5.4

According to RSS-Gen 6.12

According to 558074 D01 15.247 MEAS GUIDANCE v05r02 Section 9

According to ANSI C63.10 Section 7.8.5

9.5.2 Conformance Limit

The max For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.5.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.5.4 Test Procedure

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel (about 8MHz)

Set RBW > the 20 dB bandwidth of the emission being measured (about 3MHz)

Set VBW ≥ RBW

Set Sweep = auto

Set Detector function = peak

Set Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission to determine the peak amplitude level.


Test Results

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar
Test Engineer:	XXH


Note: N/A

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	0.18	≤20.97	PASS
		2441	-0.05	≤20.97	PASS
		2480	-0.47	≤20.97	PASS
2DH5	Ant1	2402	0.75	≤20.97	PASS
		2441	0.52	≤20.97	PASS
		2480	0.09	≤20.97	PASS
3DH5	Ant1	2402	1.18	≤20.97	PASS
		2441	0.93	≤20.97	PASS
		2480	0.51	≤20.97	PASS


DH5_Ant1_2402

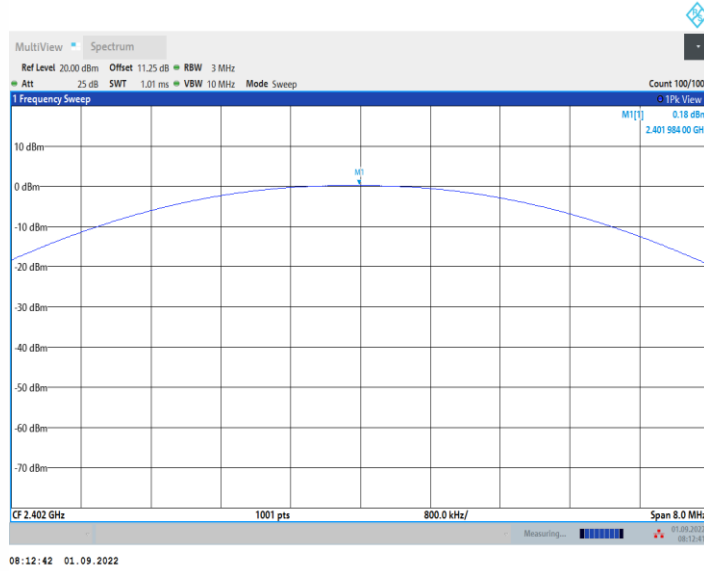


DH5_Ant1_2441

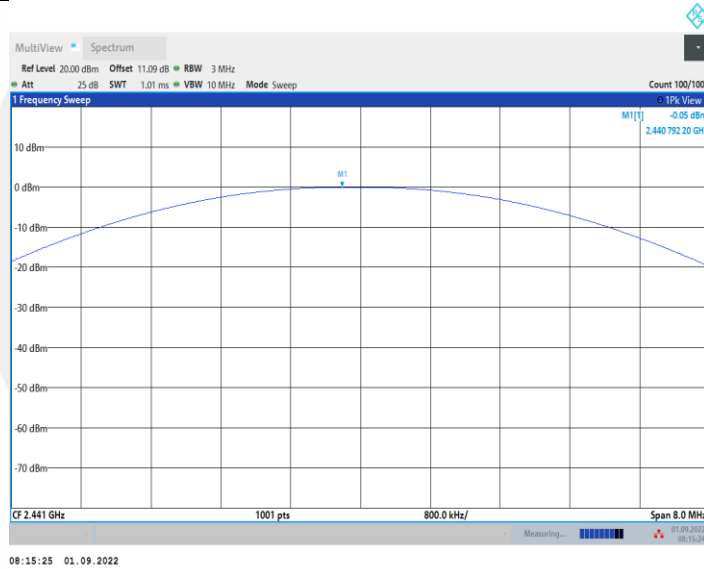


DH5_Ant1_2480

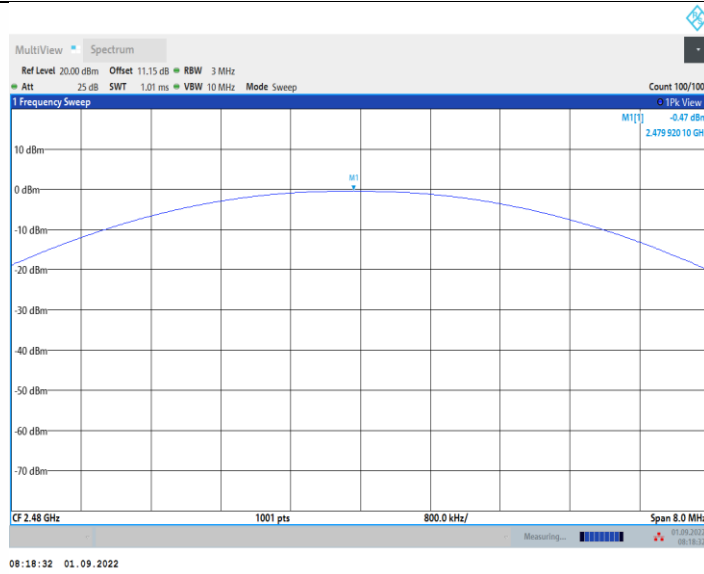


2DH5 Ant1 2402

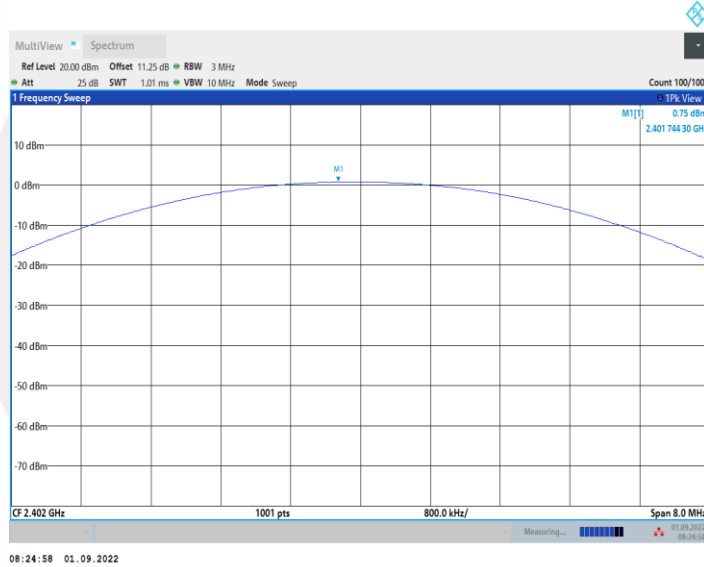


2DH5 Ant1 2441

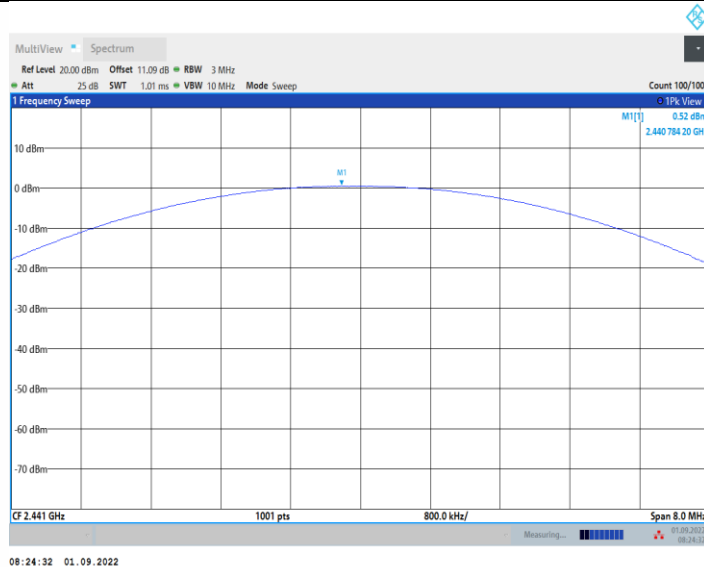


2DH5_Ant1_2480

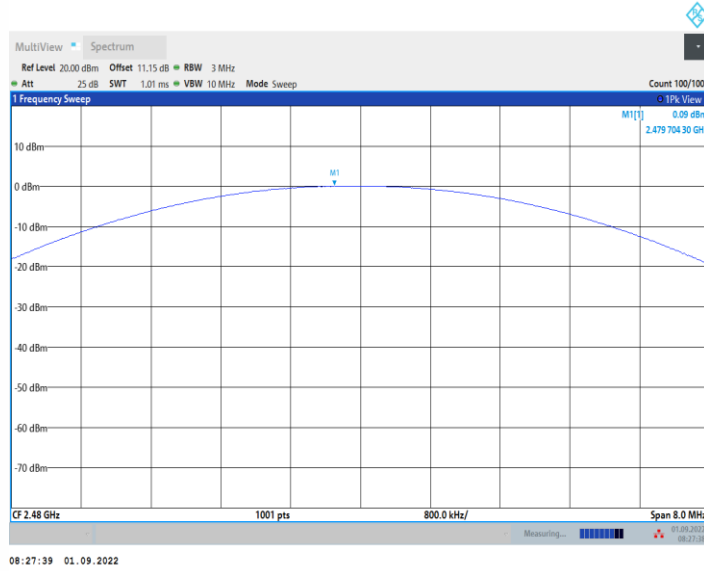


3DH5_Ant1_2402

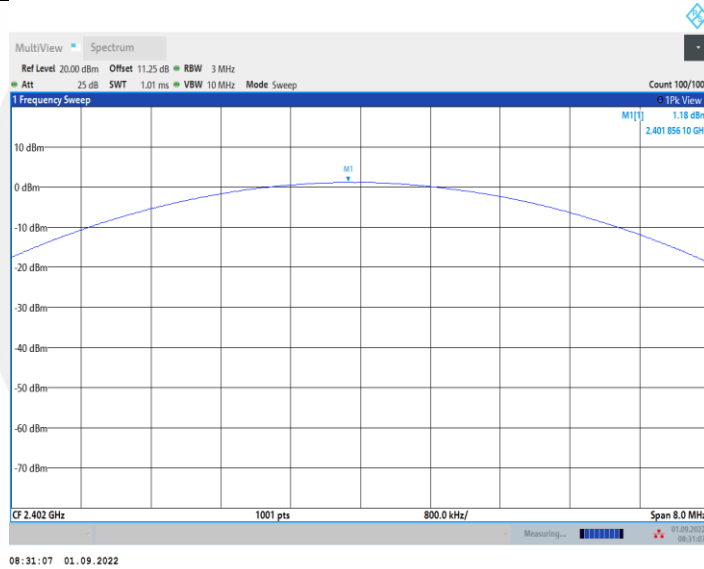

3DH5_Ant1_2441

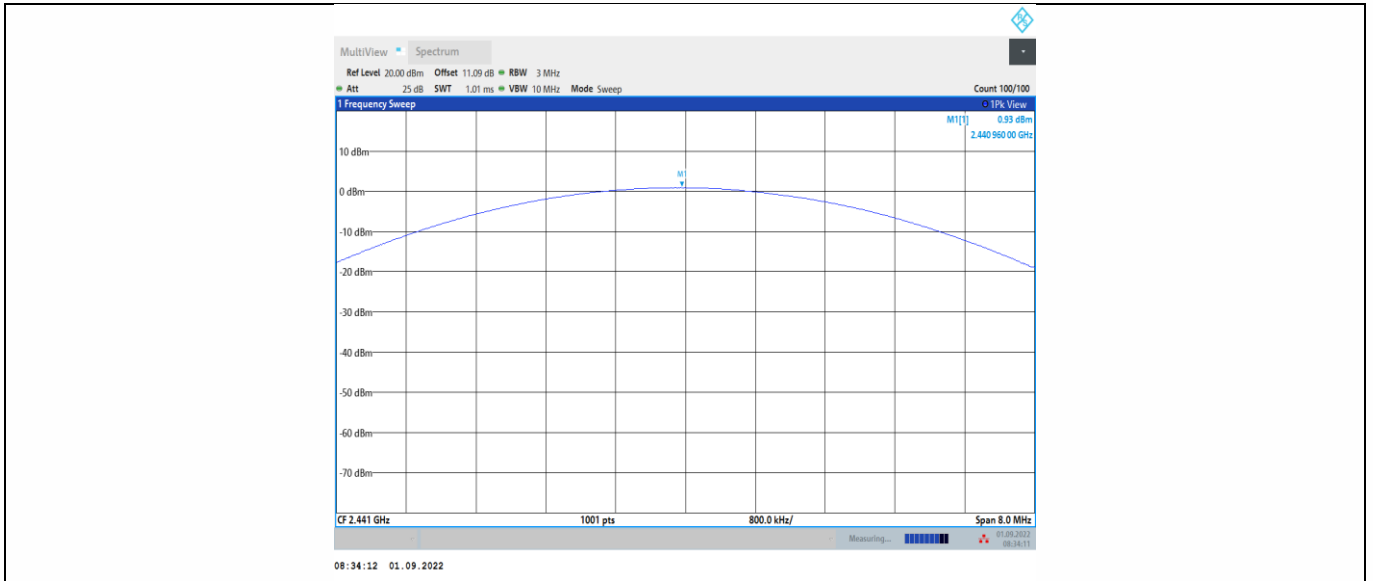

3DH5_Ant1_2480

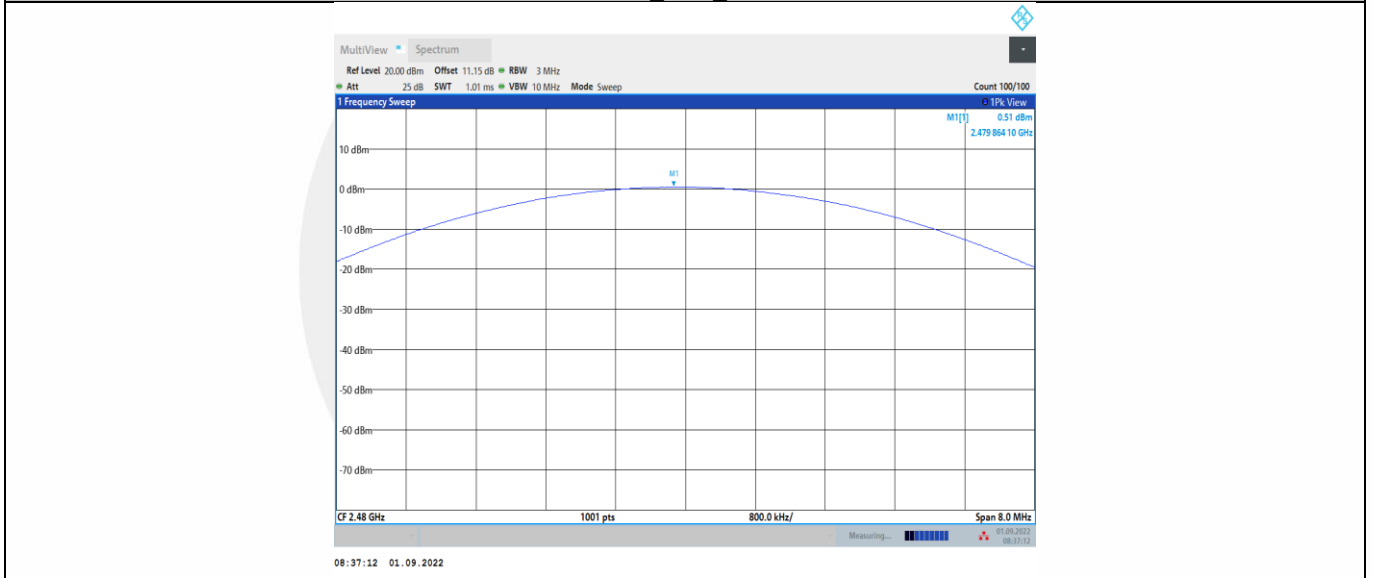

9.6 CONDUCTED SUPRIIOUS EMISSION

9.6.1 Applicable Standard

According to FCC Part 15.247(d)

According to IC RSS-247 5.5

According to 558074 D01 15.247 MEAS GUIDANCE v05r02 Section 9

According to ANSI C63.10 Section 7.8.8

9.6.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

9.6.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.6.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximum conduceted level.

Note that the channel found to contain the maximum conduceted level can be used to establish the reference level.

■ Band-edge measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW $\geq 1\%$ of the span=100kHz Set VBW $\geq 3 \times$ RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

■ Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to 25GHz). Set RBW =

100 kHz Set VBW \geq RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.

9.6.5 Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar
Test Engineer:	XXH

Note: N/A

Band edge measurements


TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-0.15	-53.24	≤-20.15	PASS
		High	2480	-0.80	-53.06	≤-20.8	PASS
		Low	Hop_2402	-0.25	-55	≤-20.25	PASS
		High	Hop_2480	-0.80	-58.98	≤-20.8	PASS
2DH5	Ant1	Low	2402	-3.95	-56.64	≤-23.95	PASS
		High	2480	-0.97	-53.25	≤-20.97	PASS
3DH5	Ant1	Low	2402	-0.16	-54.74	≤-20.16	PASS
		High	2480	-0.81	-54.21	≤-20.81	PASS

Conducted Spurious Emission


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	30~1000	-0.15	-55.51	≤-20.15	PASS
			1000~26500	-0.15	-44.48	≤-20.15	PASS
		2441	30~1000	-0.39	-55.27	≤-20.39	PASS
			1000~26500	-0.39	-47.58	≤-20.39	PASS
		2480	30~1000	-0.80	-56.18	≤-20.8	PASS
			1000~26500	-0.80	-46.69	≤-20.8	PASS
2DH5	Ant1	2402	30~1000	-3.95	-55.34	≤-23.95	PASS
			1000~26500	-3.95	-51.8	≤-23.95	PASS
		2441	30~1000	-4.28	-56.02	≤-24.28	PASS
			1000~26500	-4.28	-51.04	≤-24.28	PASS
		2480	30~1000	-0.97	-55.55	≤-20.97	PASS
			1000~26500	-0.97	-50.68	≤-20.97	PASS
3DH5	Ant1	2402	30~1000	-0.16	-56.63	≤-20.16	PASS
			1000~26500	-0.16	-45.71	≤-20.16	PASS
		2441	30~1000	-0.40	-55.84	≤-20.4	PASS
			1000~26500	-0.40	-49.02	≤-20.4	PASS
		2480	30~1000	-0.81	-53.54	≤-20.81	PASS
			1000~26500	-0.81	-48.74	≤-20.81	PASS

Band edge measurements


DH5_Ant1_Low_2402

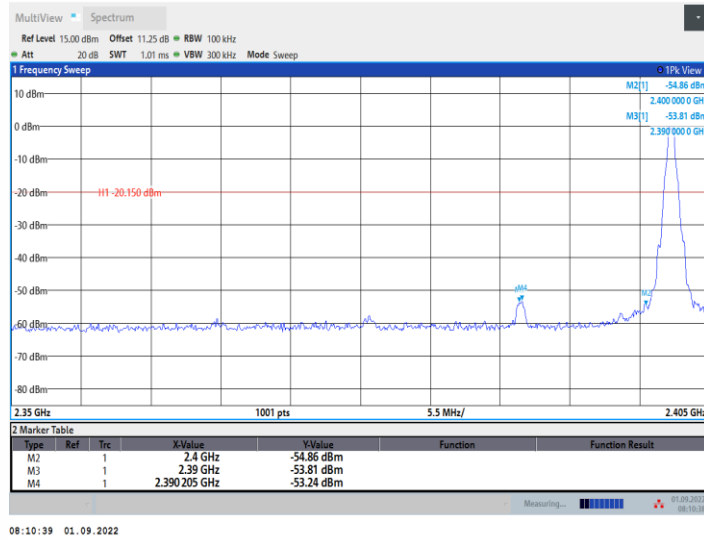


DH5_Ant1_High_2480

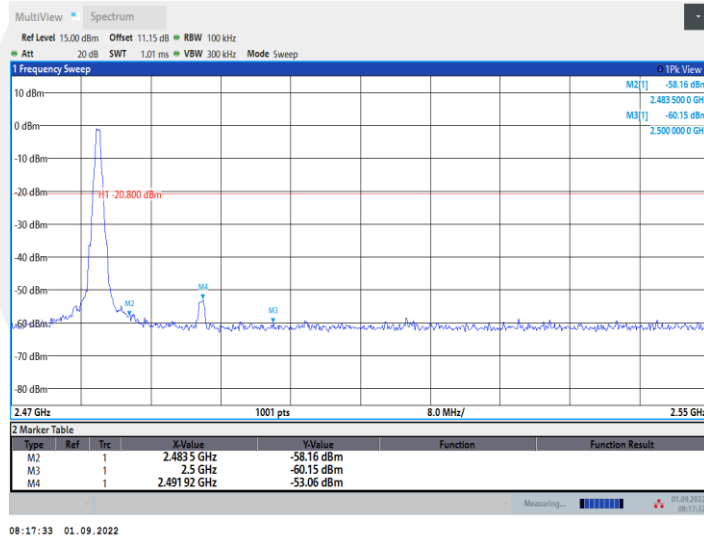


DH5_Ant1_Low_Hop_2402

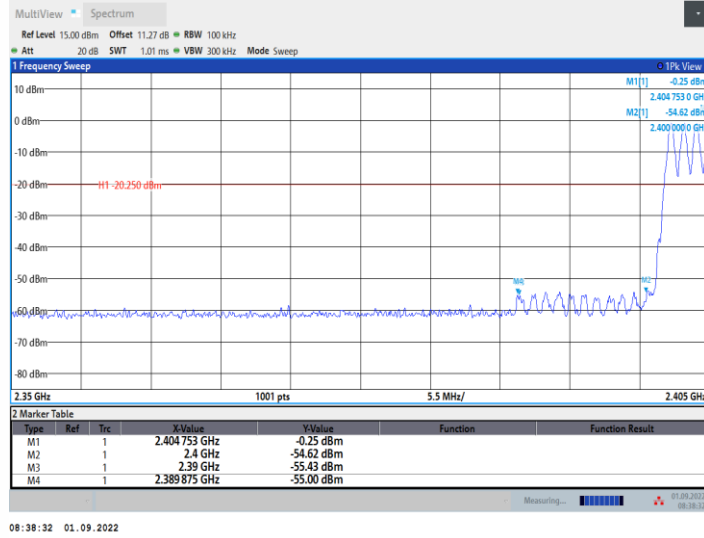


DH5 Ant1_High_Hop_2480

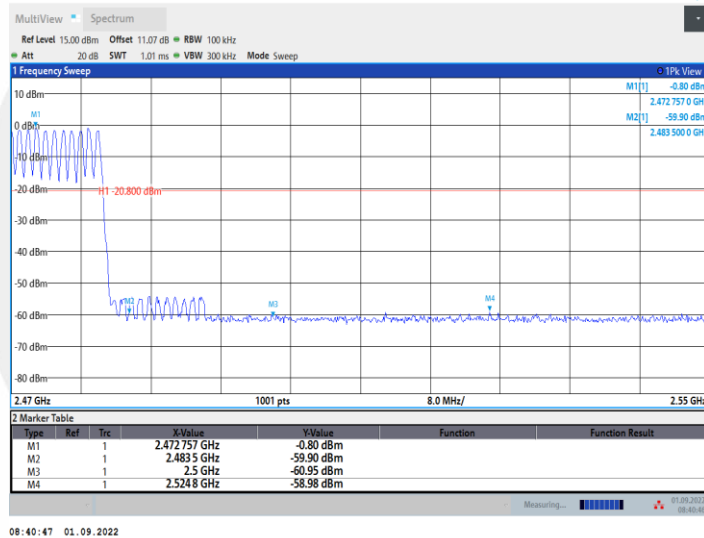


2DH5 Ant1_Low_2402

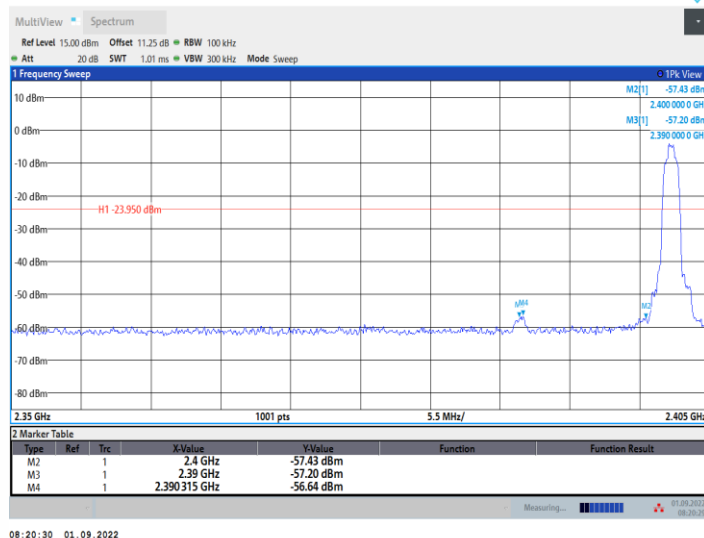


2DH5_Ant1_High_2480

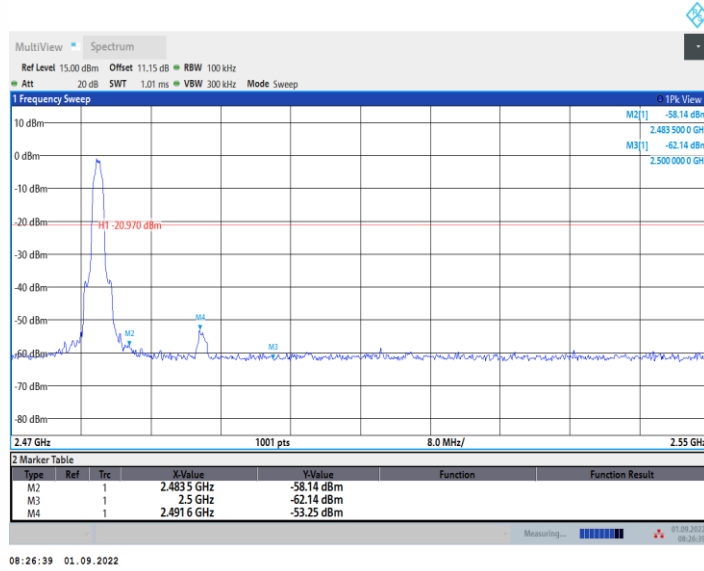

3DH5_Ant1_Low_2402

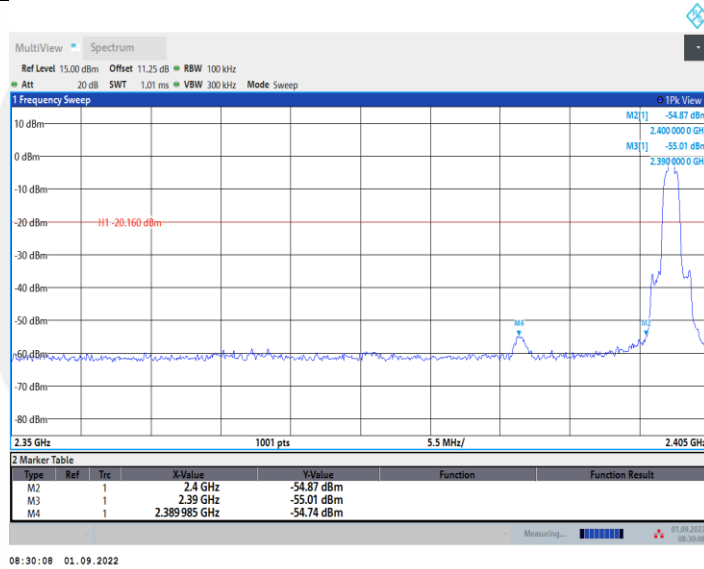


3DH5_Ant1_High_2480

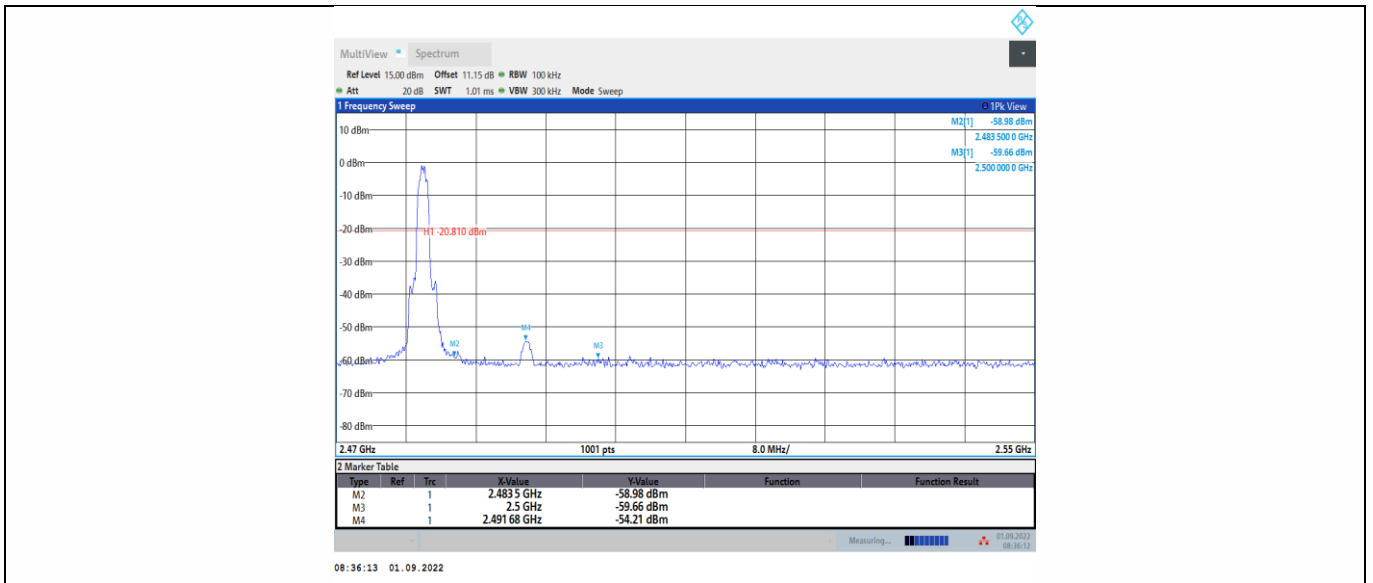


Conducted Spurious Emission


DH5_Ant1_2402_30~1000

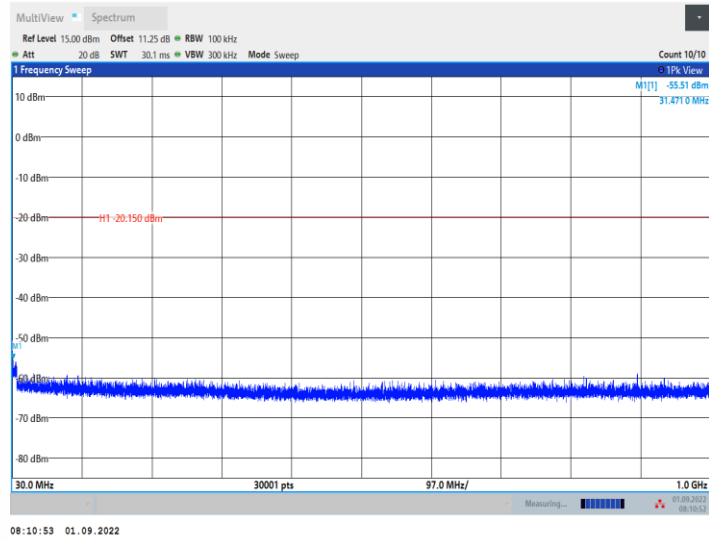


DH5_Ant1_2402_1000~26500

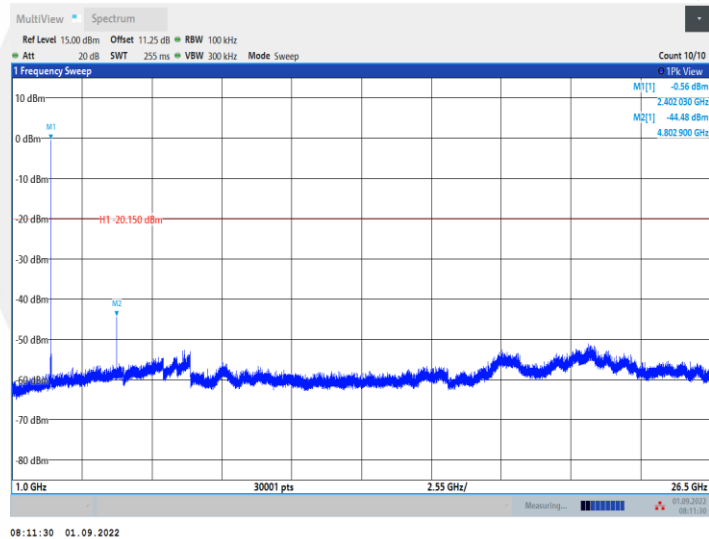


DH5_Ant1_2441_30~1000

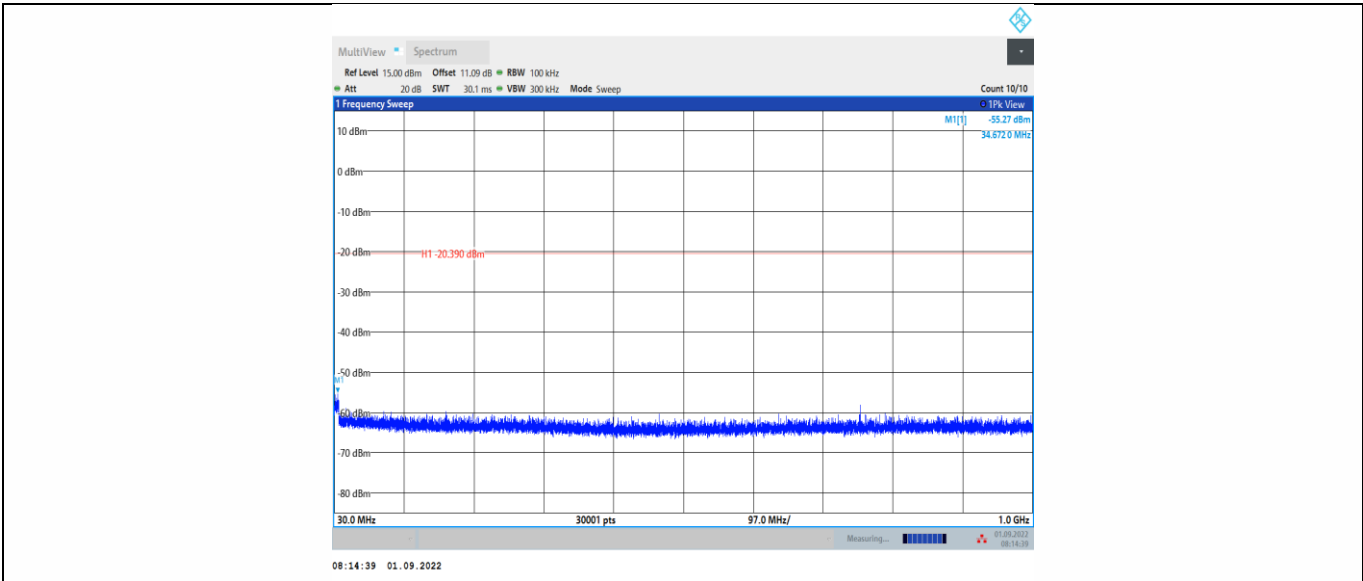


DH5_Ant1_2441_1000~26500

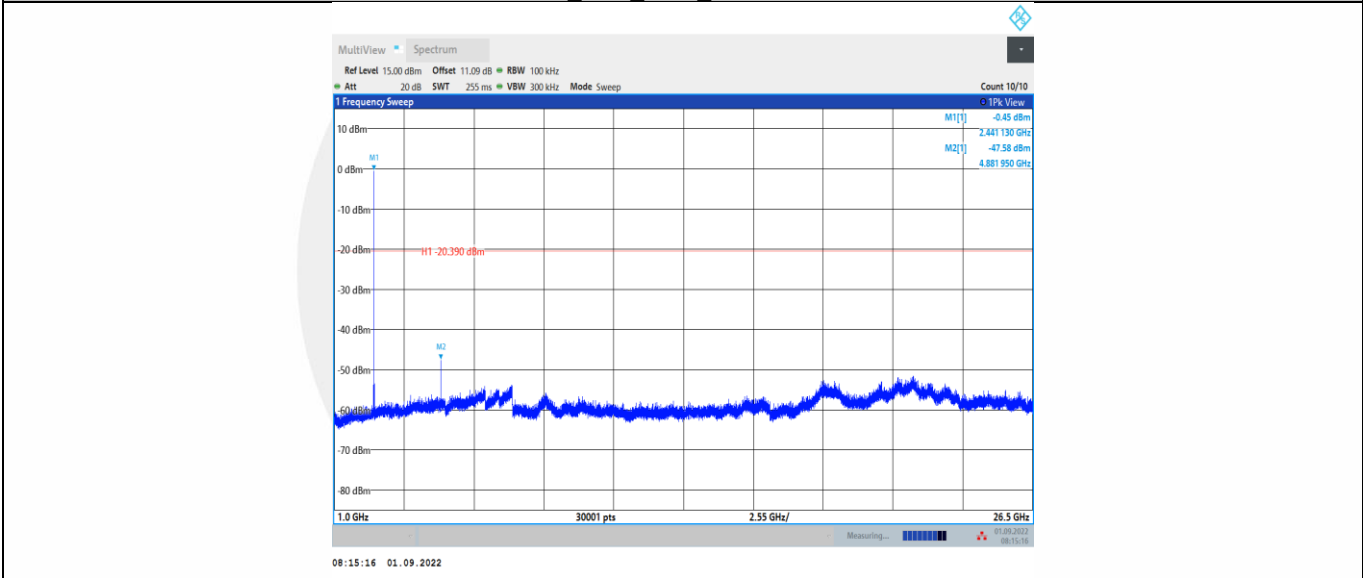


DH5_Ant1_2480_30~1000

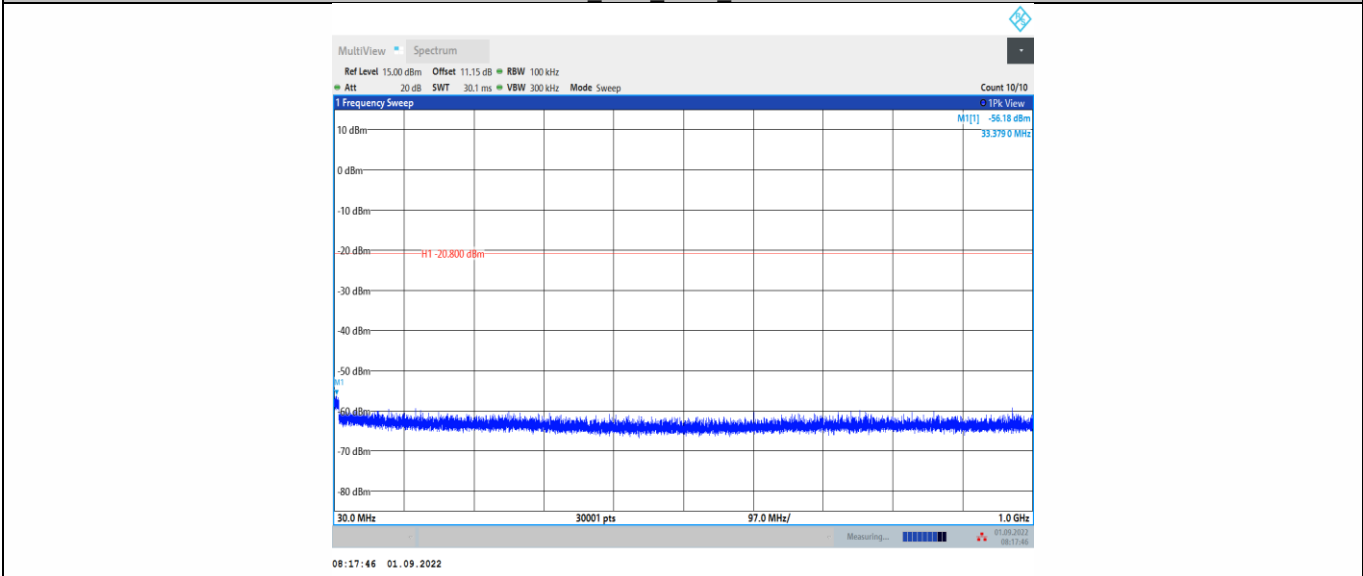


DH5_Ant1_2480_1000~26500

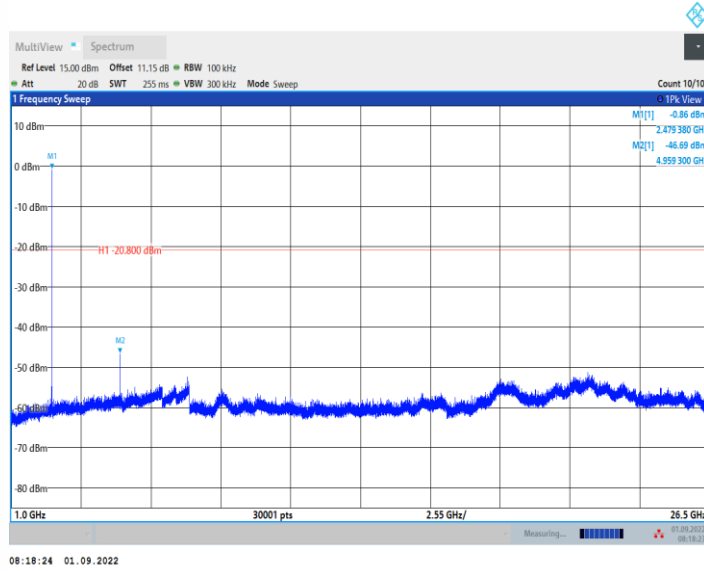


2DH5_Ant1_2402_30~1000

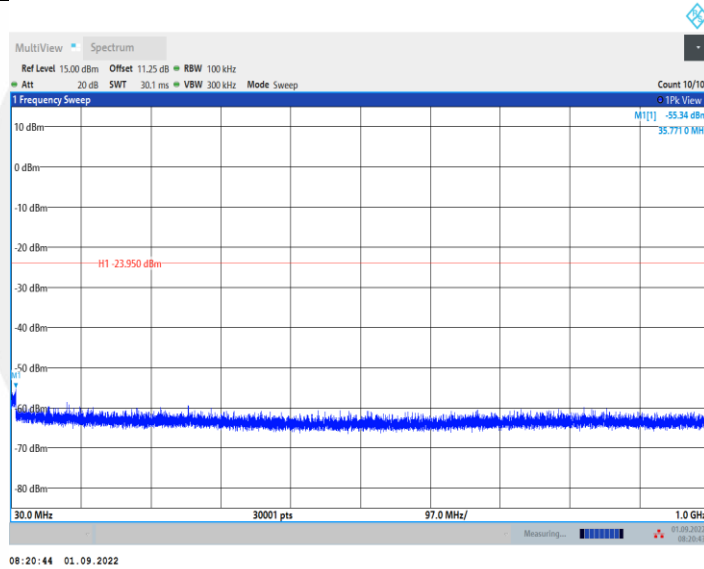


2DH5_Ant1_2402_1000~26500

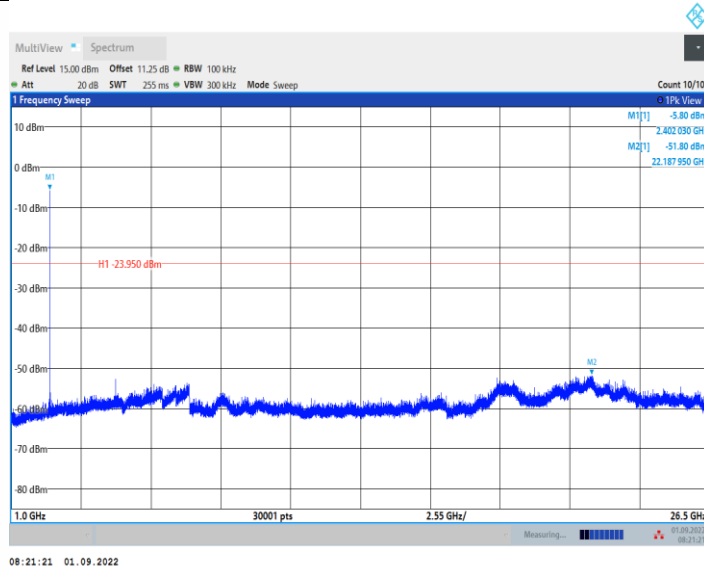


2DH5_Ant1_2441_30~1000

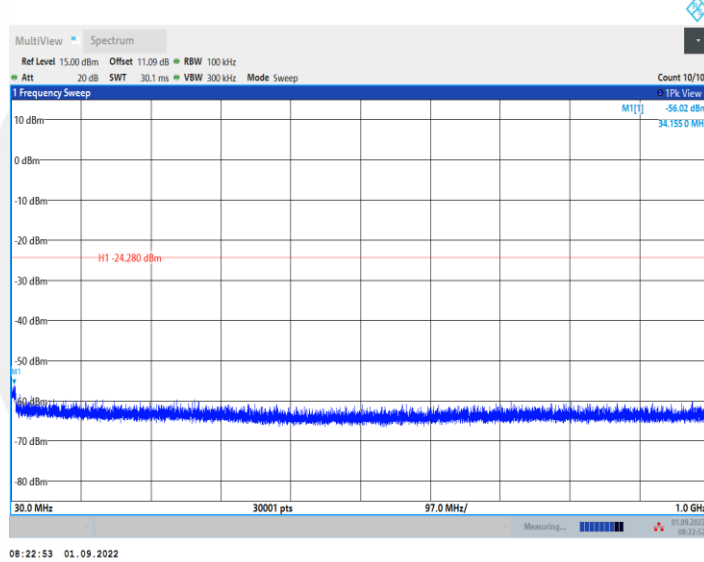


2DH5_Ant1_2441_1000~26500

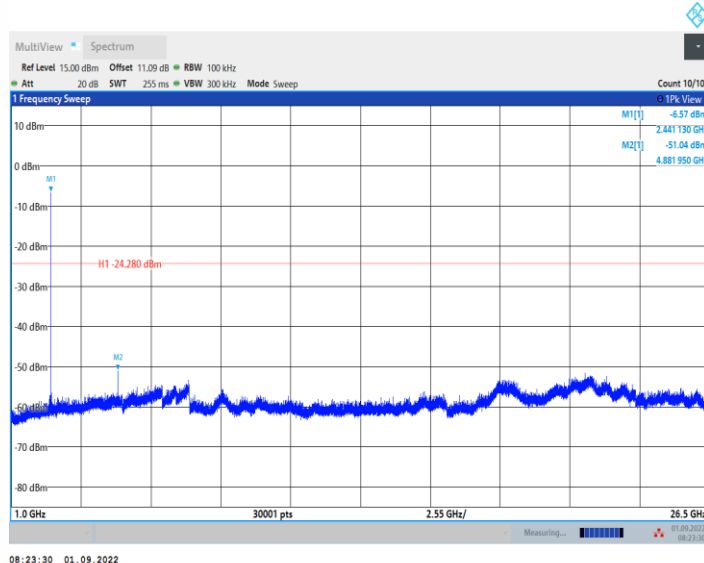


2DH5_Ant1_2480_30~1000

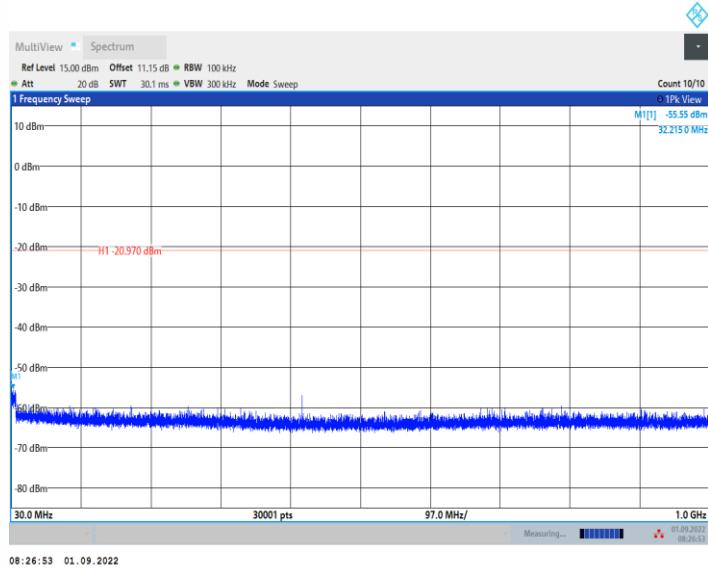


2DH5_Ant1_2480_1000~26500

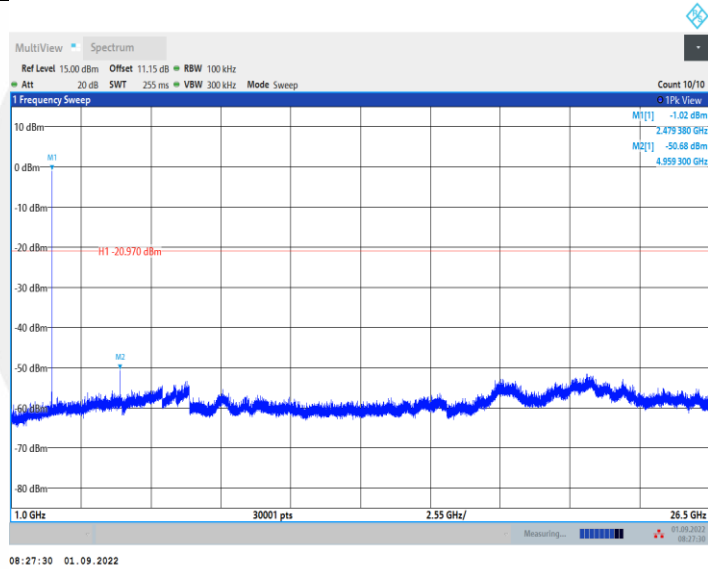


3DH5_Ant1_2402_30~1000

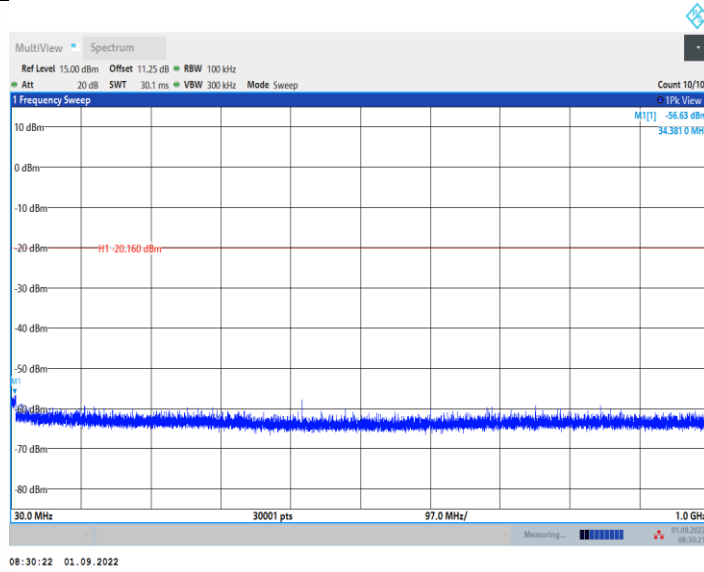


3DH5_Ant1_2402_1000~26500

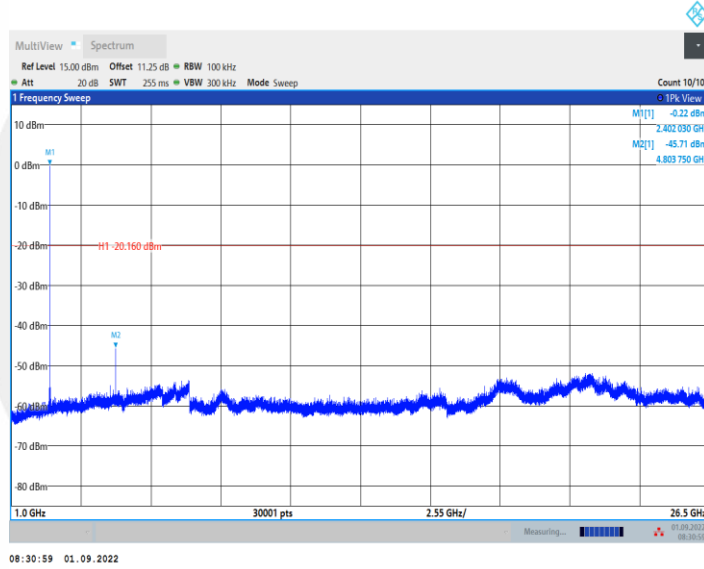

3DH5_Ant1_2441_30~1000

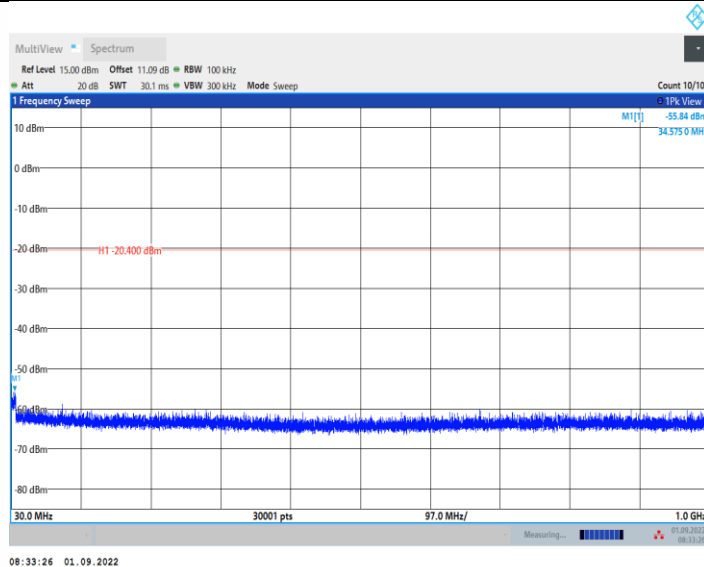


3DH5_Ant1_2441_1000~26500

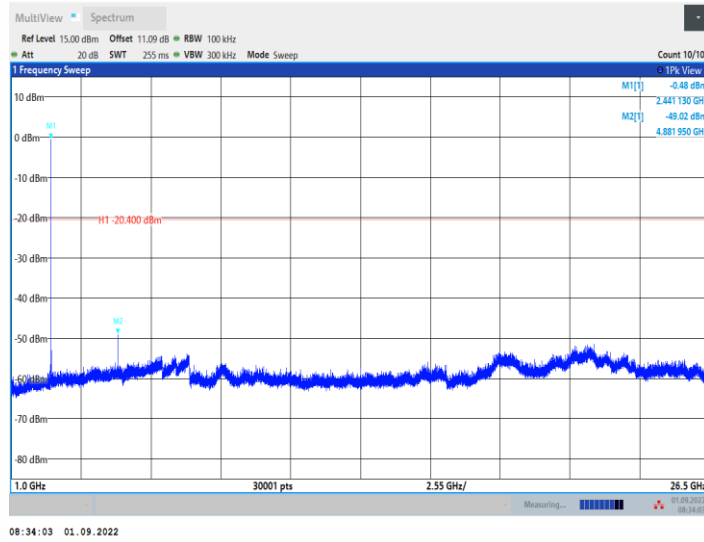


08:34:03 01.09.2022

3DH5_Ant1_2480_30~1000

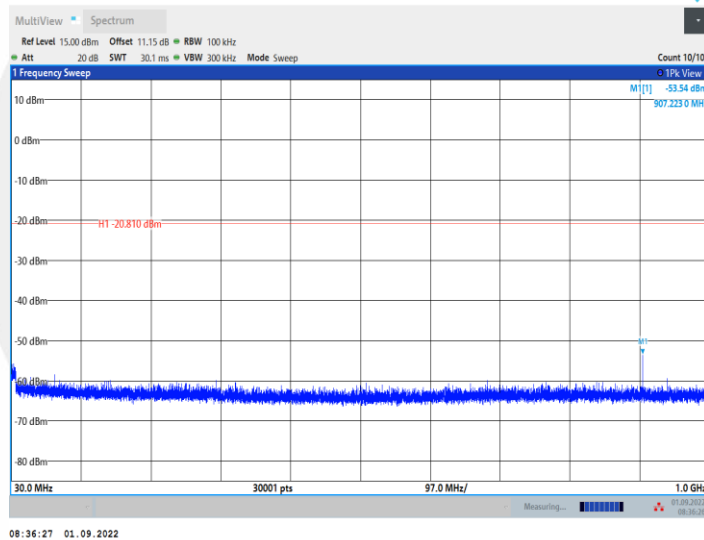

08:36:27 01.09.2022

3DH5_Ant1_2480_1000~26500

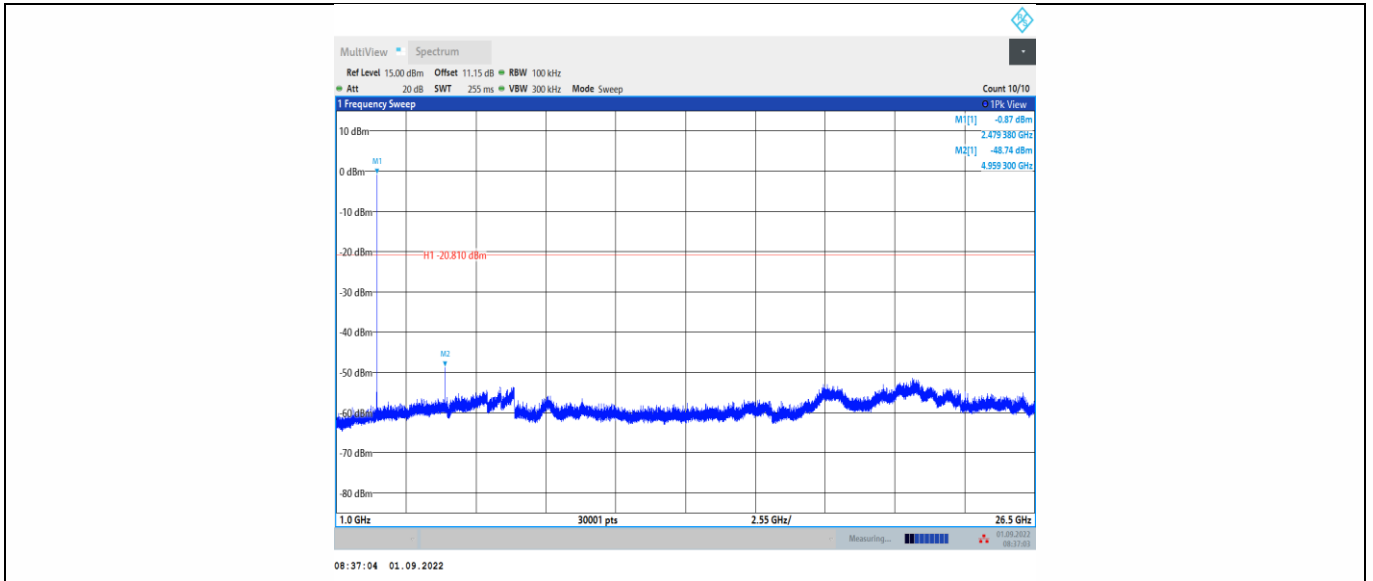

9.7 RADIATED SPURIOUS EMISSION

9.7.1 Applicable Standard

According to FCC Part 15.247(d), 15.205, 15.209
 According to RSS-Gen and RSS-247
 According to 558074 D01 15.247 MEAS GUIDANCE v05r02 Section 9
 According to ANSI C63.10 Section 6.3, 6.4, 6.5, 6.6 and 6.10.5

9.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
 According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

9.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

9.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For average measurements the resolution bandwidth of spectrum analyzer is 1 MHz with the video bandwidth is ≥ 1/T with peak detector.

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 9kHz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 200Hz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit. Submit this data.

9.7.5 Test Results

Temperature:	25 °C
Relative Humidity:	45%
ATM Pressure:	1011 mbar
Test Engineer:	XXH

■ Spurious Emission below 30MHz (9KHz to 30MHz)

For Spurious Emission below 30MHz (9KHz to 30MHz), was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

■ Spurious Emission Above 1GHz (1GHz to 25GHz)

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result was report as below:

Test mode: GFSK Frequency: Channel 0: 2402MHz

Freq. (MHz)	Ant.Pol.	Reading Level (dBuV/m)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Remark
4804.110	V	57.89	-8.55	49.34	74.00	-24.66	peak
4804.110	V	39.80	-8.55	31.25	54.00	-22.75	AVG
7200.309	V	59.75	-1.59	58.16	64.42	-15.84	peak
9613.430	V	60.22	0.97	61.19	64.42	-12.81	peak
18000.00	V	49.83	15.66	65.49	74.00	-8.51	peak
18000	V	32.55	15.66	48.21	54.00	-5.79	AVG
4804.110	H	58.96	-8.55	50.41	74.00	-23.59	peak
4804.110	H	40.69	-8.55	32.14	54.00	-21.86	AVG
7200.309	H	56.82	-1.59	55.23	74.37	-18.77	peak
9613.430	H	57.90	0.97	58.87	74.37	-15.13	peak
18000.00	H	49.24	15.66	64.90	74.00	-9.10	peak
18000	H	31.06	15.66	46.72	54.00	-7.28	AVG

Note: (1) Peak RBW = 1 MHz, VBW ≥ 3 × RBW, Detector = Peak;
 (2) Avg RBW = 1 MHz, VBW = 1/T_{on}, Detector = Peak, where: T_{on} is transmit duration;
 (3) Corrected Reading = Reading Level + Correct Factor;
 (4) Correct Factor = Ant_F + Cab_L - Preamp;
 (5) Margin = Limit - Corrected Reading;

2402MHz V=84.42 dBuV/m H=94.37 dBuV/m

Test mode: GFSK Frequency: Channel 39: 2441MHz

Freq. (MHz)	Ant.Pol.	Reading Level (dBuV/m)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Remark
4888.151	V	56.14	-8.19	47.95	74.00	-26.05	peak
4888.151	V	38.41	-8.19	30.22	54.00	-23.78	AVG
9781.602	V	63.99	1.35	65.34	65.42	-8.66	peak
18000.00	V	49.92	15.66	65.58	74.00	-8.42	peak
18000	V	32.49	15.66	48.15	54.00	-5.85	AVG
4888.151	H	55.46	-8.19	47.27	74.00	-26.73	peak
4888.151	H	38.45	-8.19	30.26	54.00	-23.74	AVG
9781.602	H	62.20	1.35	63.55	73.26	-10.45	peak
18000.00	H	49.70	15.66	65.36	74.00	-8.64	peak
18000	H	32.48	15.66	48.14	54.00	-5.86	AVG

Note: (1) Peak RBW = 1 MHz, VBW ≥ 3 × RBW, Detector = Peak;
 (2) Avg RBW = 1 MHz, VBW = 1/T_{on}, Detector = Peak, where: T_{on} is transmit duration;
 (3) Corrected Reading = Reading Level + Correct Factor;
 (4) Correct Factor = Ant_F + Cab_L - Preamp;
 (5) Margin = Limit - Corrected Reading;

2441MHz V=85.42 dBuV/m H=93.26 dBuV/m



Test mode: GFSK Frequency: Channel 78: 2480MHz

Freq. (MHz)	Ant.Pol.	Reading Level (dBuV/m)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Remark
4959.307	V	57.17	-7.90	49.27	74.00	-24.73	peak
4959.307	V	39.14	-7.90	31.24	54.00	-22.76	AVG
9923.991	V	67.34	1.69	69.03	64.71	-4.97	peak
18000.00	V	49.30	15.66	64.96	74.00	-9.04	peak
18000.00	V	30.49	15.66	46.15	54.00	-7.85	AVG
4959.307	H	57.64	-7.90	49.74	74.00	-24.26	peak
4959.307	H	39.82	-7.90	31.92	54.00	-22.08	AVG
9923.991	H	62.35	1.69	64.04	71.10	-9.96	peak
18000.00	H	49.85	15.66	65.51	74.00	-8.49	peak
18000	H	31.96	15.66	47.62	54.00	-6.38	AVG

Note: (1) Peak RBW = 1 MHz, VBW $\geq 3 \times$ RBW, Detector = Peak;
 (2) Avg RBW = 1 MHz, VBW = $1/T_{on}$, Detector = Peak, where: T_{on} is transmit duration;
 (3) Corrected Reading = Reading Level + Correct Factor;
 (4) Correct Factor = Ant_F + Cab_L - Preamp;
 (5) Margin = Limit - Corrected Reading;

2480MHz V=94.71 dBuV/m H=91.10 dBuV/m

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK, Hopping) mode have been tested, and the worst result was report as below:

Test mode: GFSK Frequency: Channel 0: 2402MHz

Freq. (MHz)	Ant.Pol.	Reading Level (dBuV/m)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Remark
2380.644	V	43.90	5.98	49.88	74.00	-24.12	peak
2380.644	V	25.25	5.98	31.23	54.00	-22.77	AVG
2387.436	H	43.86	6.00	49.86	74.00	-24.14	peak
2387.436	H	25.47	6.00	31.47	54.00	-22.53	AVG

Note: (1) Peak RBW = 1 MHz, VBW $\geq 3 \times$ RBW, Detector = Peak;
 (2) Avg RBW = 1 MHz, VBW = $1/T_{on}$, Detector = Peak, where: T_{on} is transmit duration;
 (3) Corrected Reading = Reading Level + Correct Factor;
 (4) Correct Factor = Ant_F + Cab_L - Preamp;
 (5) Margin = Limit - Corrected Reading;

Test mode: GFSK Frequency: Channel 78: 2480MHz

Freq. (MHz)	Ant.Pol.	Reading Level (dBuV/m)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Remark
2484.347	V	44.27	6.24	50.51	74.00	-23.49	peak
2484.347	V	26.23	6.24	32.47	54.00	-21.53	AVG
2484.316	H	44.33	6.24	50.57	74.00	-23.43	peak
2484.316	H	26.45	6.24	32.69	54.00	-21.31	AVG


Note: (1) Peak RBW = 1 MHz, VBW $\geq 3 \times$ RBW, Detector = Peak;
 (2) Avg RBW = 1 MHz, VBW = $1/T_{on}$, Detector = Peak, where: T_{on} is transmit duration;
 (3) Corrected Reading = Reading Level + Correct Factor;
 (4) Correct Factor = Ant_F + Cab_L - Preamp;
 (5) Margin = Limit - Corrected Reading;

Test mode: GFSK Frequency: Hopping


Freq. (MHz)	Ant.Pol.	Reading Level (dBuV/m)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Remark
2400.000	V	42.57	6.05	48.62	74.00	-25.38	peak
2400.000	V	24.10	6.05	30.15	54.00	-23.85	AVG
2483.500	V	42.83	6.24	49.07	74.00	-24.93	peak
2483.500	V	24.93	6.24	31.17	54.00	-22.83	AVG
2400.000	H	44.27	6.05	50.32	74.00	-23.68	peak
2400.000	H	26.34	6.05	32.39	54.00	-21.61	AVG
2483.500	H	42.75	6.24	48.99	74.00	-25.01	peak
2483.500	H	23.77	6.24	30.01	54.00	-23.99	AVG

Note: (1) Peak RBW = 1 MHz, VBW $\geq 3 \times$ RBW, Detector = Peak;
 (2) Avg RBW = 1 MHz, VBW = $1/T_{on}$, Detector = Peak, where: T_{on} is transmit duration;
 (3) Corrected Reading = Reading Level + Correct Factor;
 (4) Correct Factor = Ant_F + Cab_L - Preamp;
 (5) Margin = Limit - Corrected Reading;


Test Model Spurious Emission in Restricted Band 2310-2390MHz
Channel 0: 2402MHz GFSK V

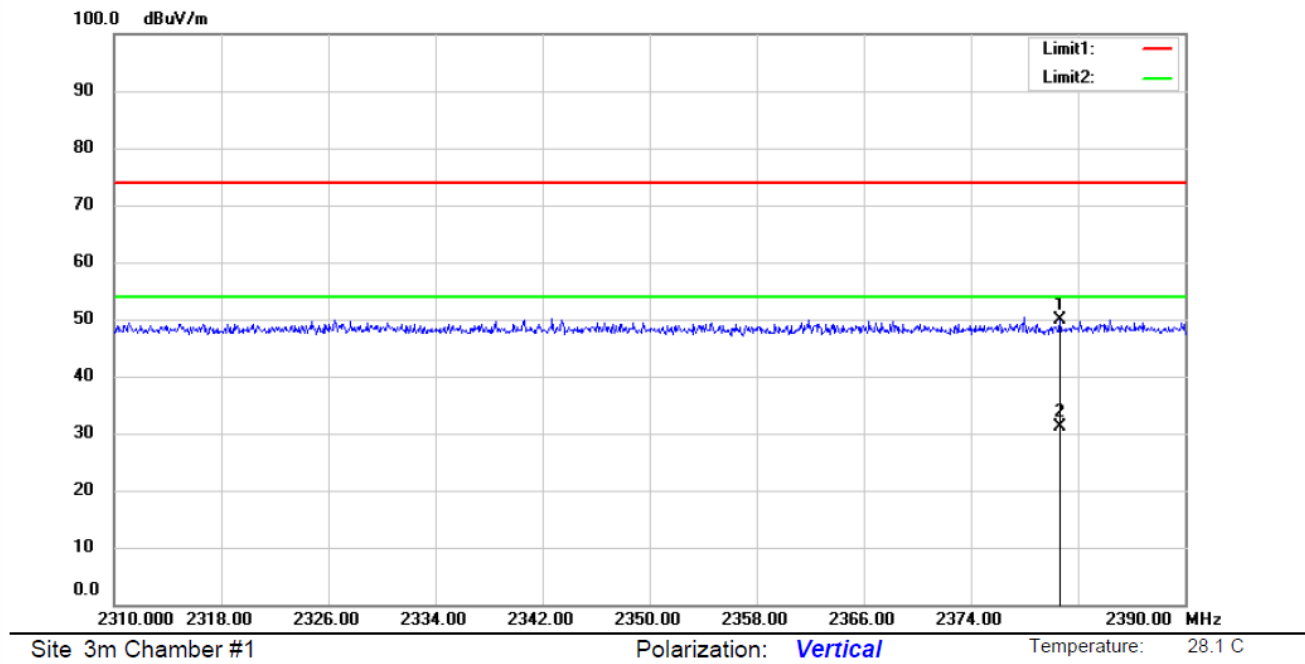

Test Model Spurious Emission in Restricted Band 2310-2390MHz
Channel 0: 2402MHz GFSK H

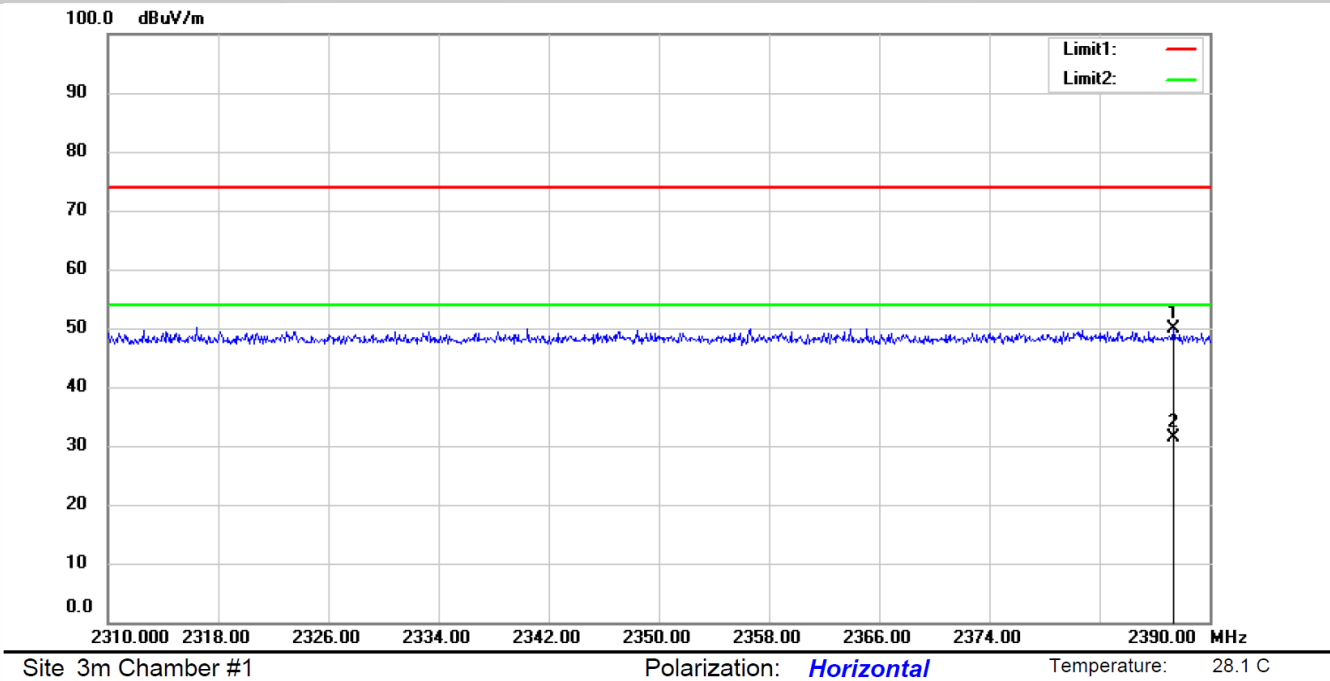


Test Model Spurious Emission in Restricted Band 2483.5-2500MHz
Channel 78: 2480MHz GFSK V

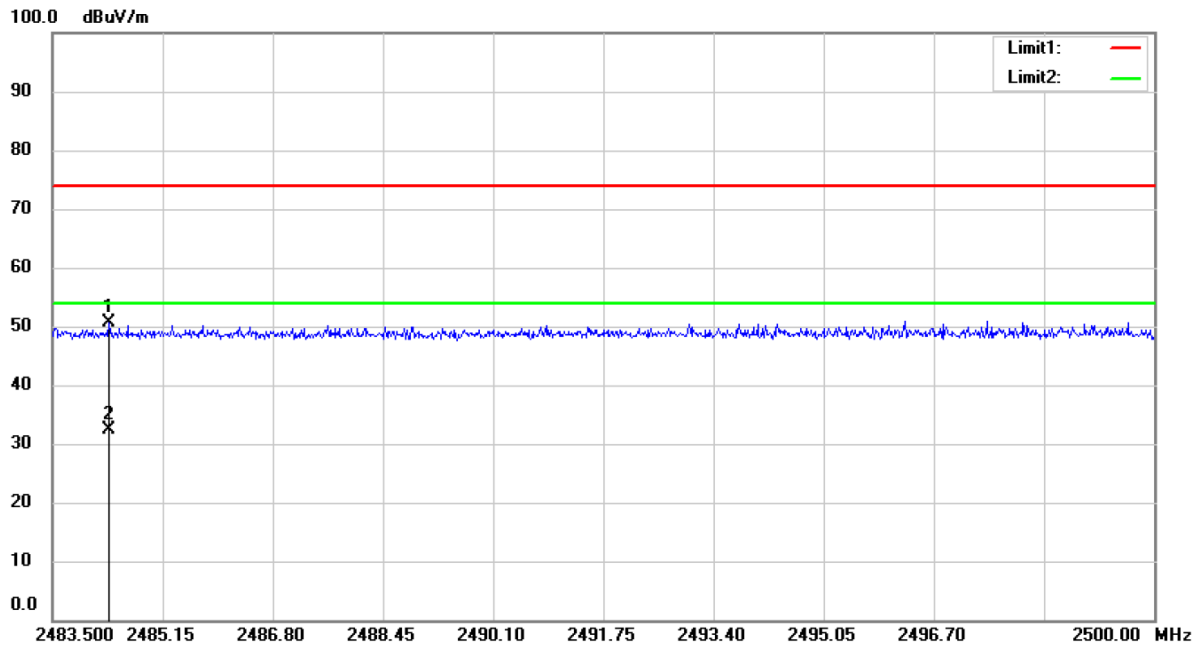


Site 3m Chamber #1 Polarization: **Vertical** Temperature: 28.1 C

Test Model Spurious Emission in Restricted Band 2483.5-2500MHz
Channel 78: 2480MHz GFSK H

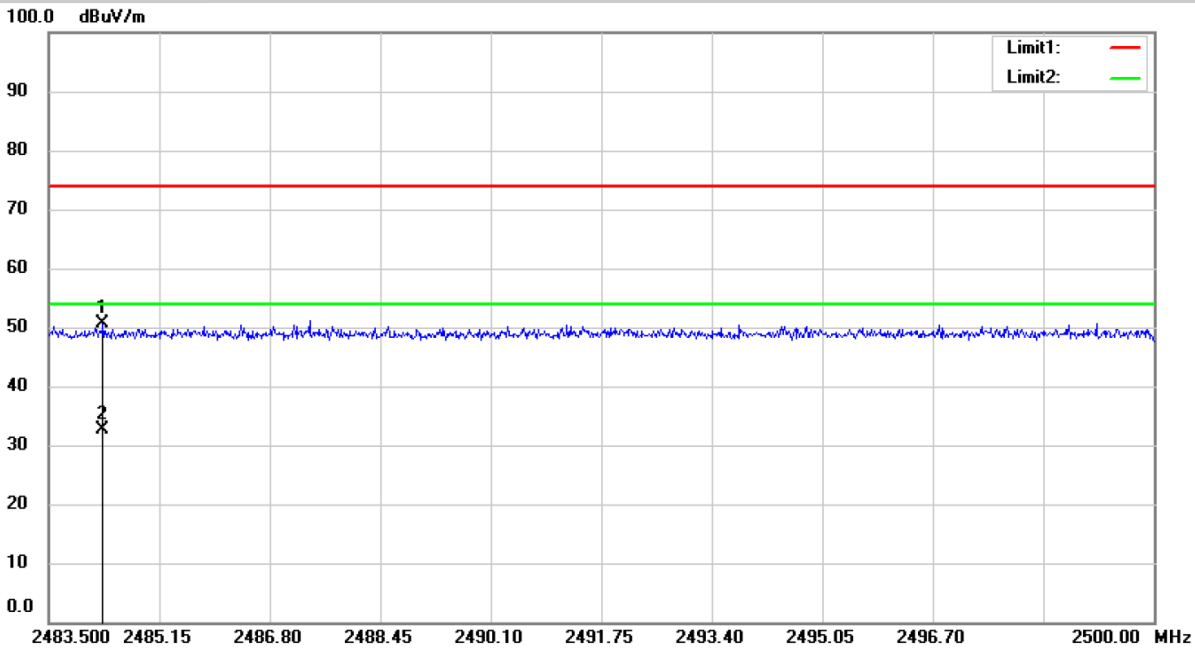


Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 28.1 C

Test Model Spurious Emission in Restricted Band 2310-2390MHz and 2400-2483.5MHz Hopping GFSK V

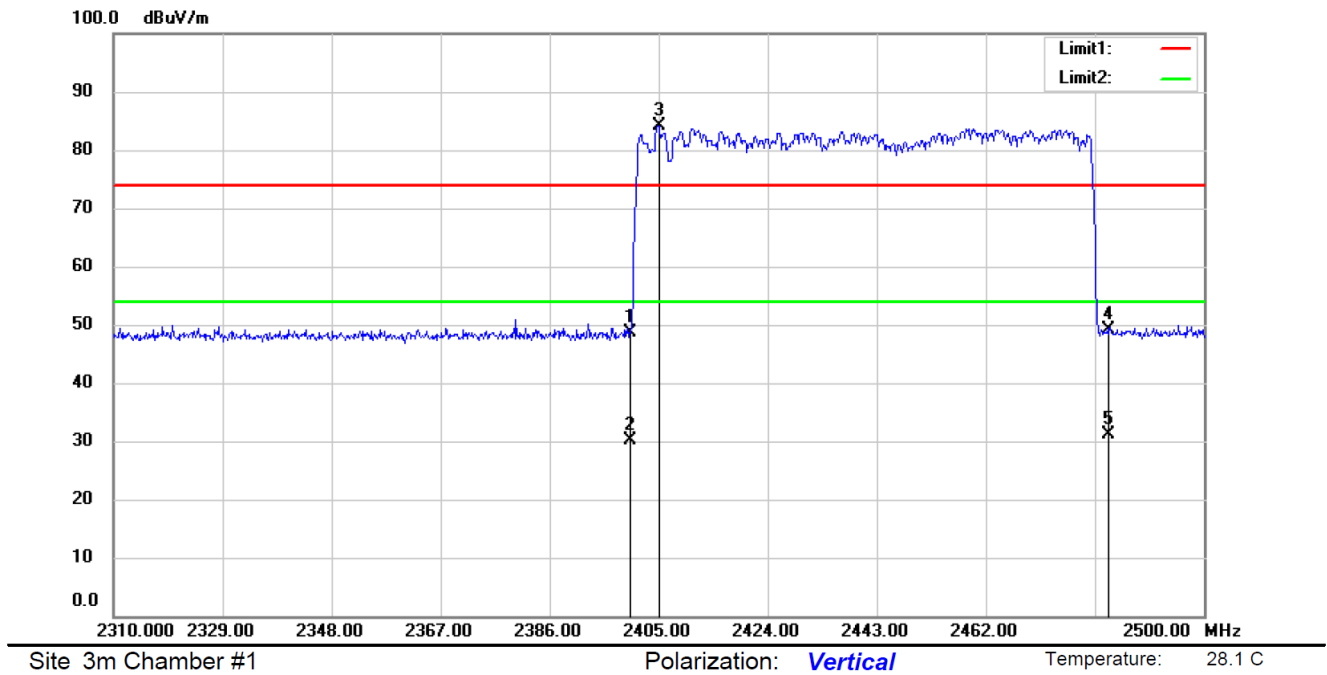


Test Model Spurious Emission in Restricted Band 2310-2390MHz and 2400-2483.5MHz Hopping GFSK H

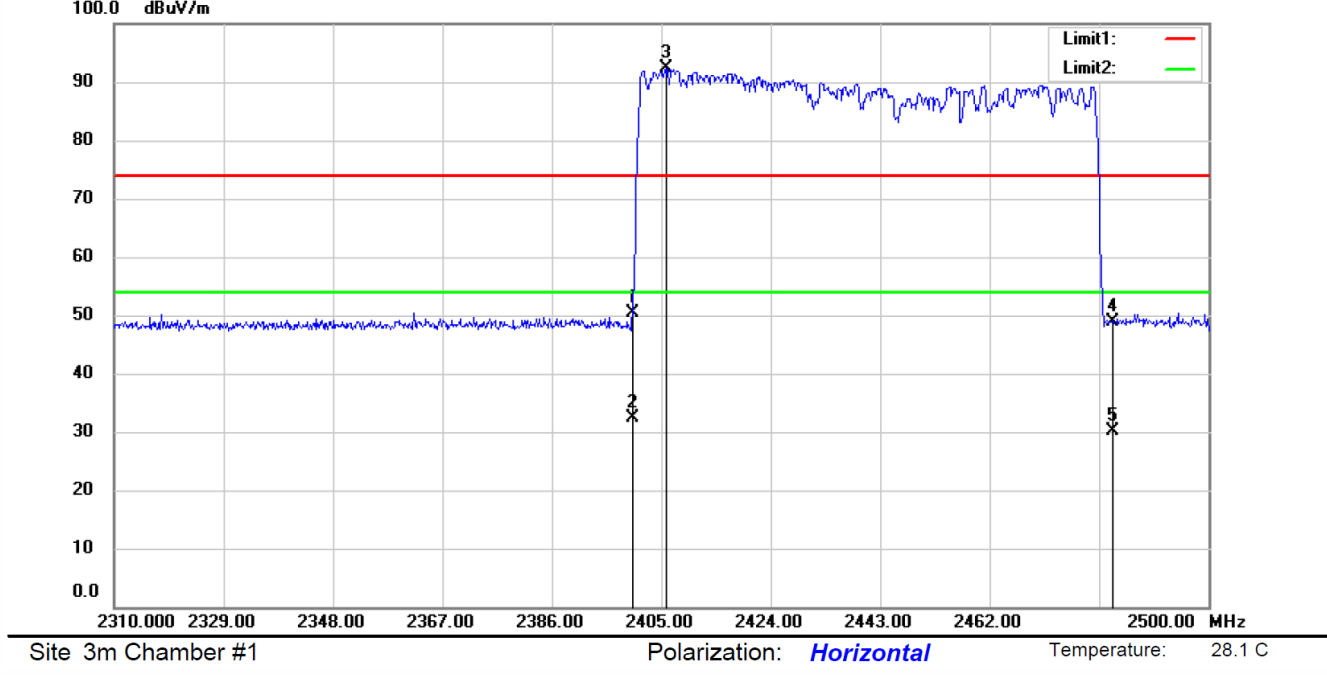


■ Spurious Emission below 1GHz (30MHz to 1GHz)

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result was report as below:

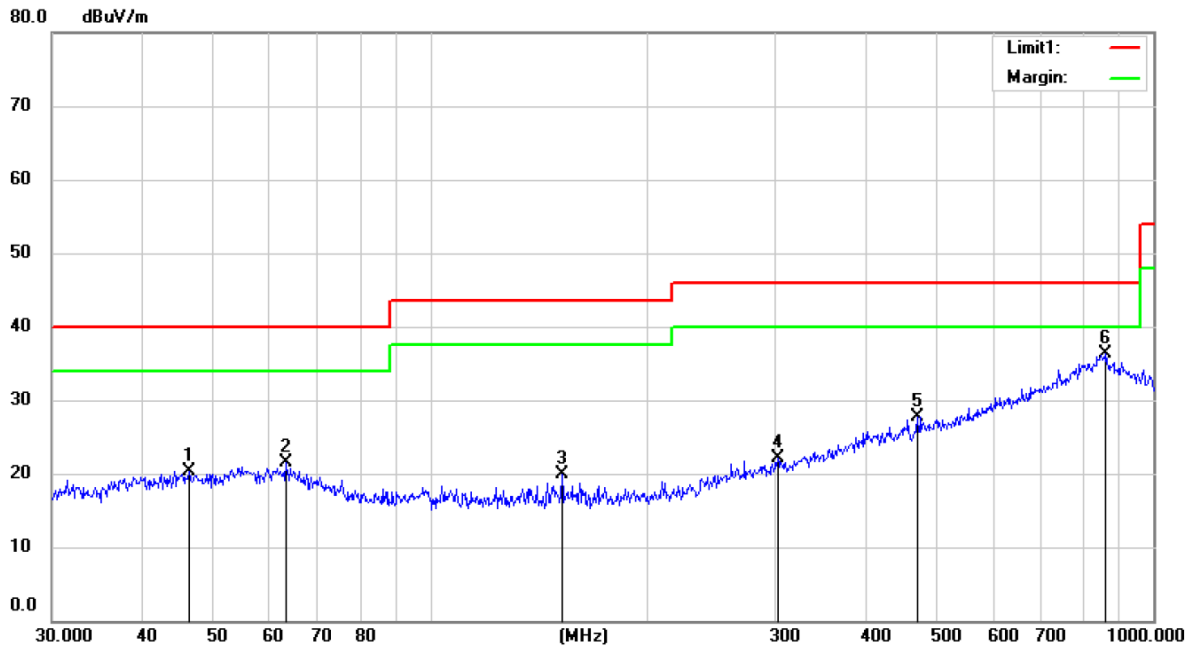

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 25.7 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC 3.7V form Battery Humidity: 55 %
 Mode:BT 2402
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		46.5030	29.53	-9.15	20.38	40.00	-19.62	QP		
2		63.0916	30.18	-8.68	21.50	40.00	-18.50	QP		
3		152.1297	31.11	-11.27	19.84	43.50	-23.66	QP		
4		302.4812	29.05	-6.99	22.06	46.00	-23.94	QP		
5		472.1760	30.01	-2.24	27.77	46.00	-18.23	QP		
6	*	860.0352	29.36	6.90	36.26	46.00	-9.74	QP		

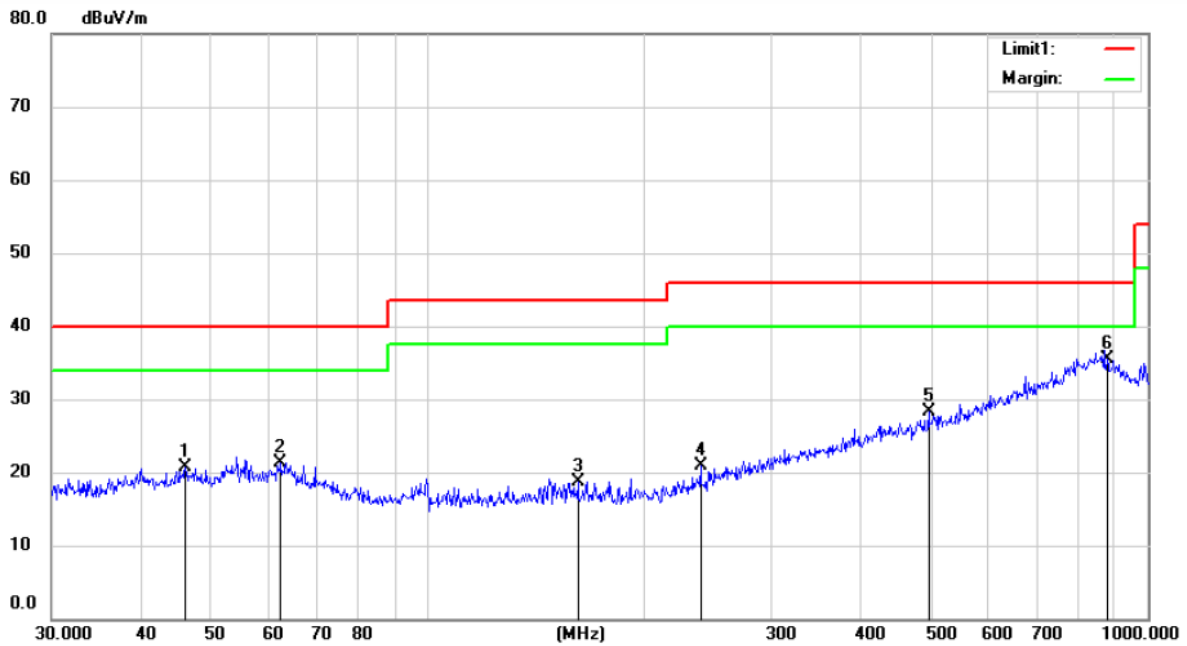

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 25.7 C

Limit: (RE)FCC PART 15 CLASS B


Power: DC 3.7V form Battery

Humidity: 55 %

Mode:BT 2402


Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		46.0164	29.91	-9.12	20.79	40.00	-19.21	QP		
2		62.4314	30.08	-8.68	21.40	40.00	-18.60	QP		
3		161.4742	30.23	-11.45	18.78	43.50	-24.72	QP		
4		239.1473	30.77	-9.93	20.84	46.00	-25.16	QP		
5		495.9344	29.86	-1.53	28.33	46.00	-17.67	QP		
6	*	878.3214	29.29	6.30	35.59	46.00	-10.41	QP		

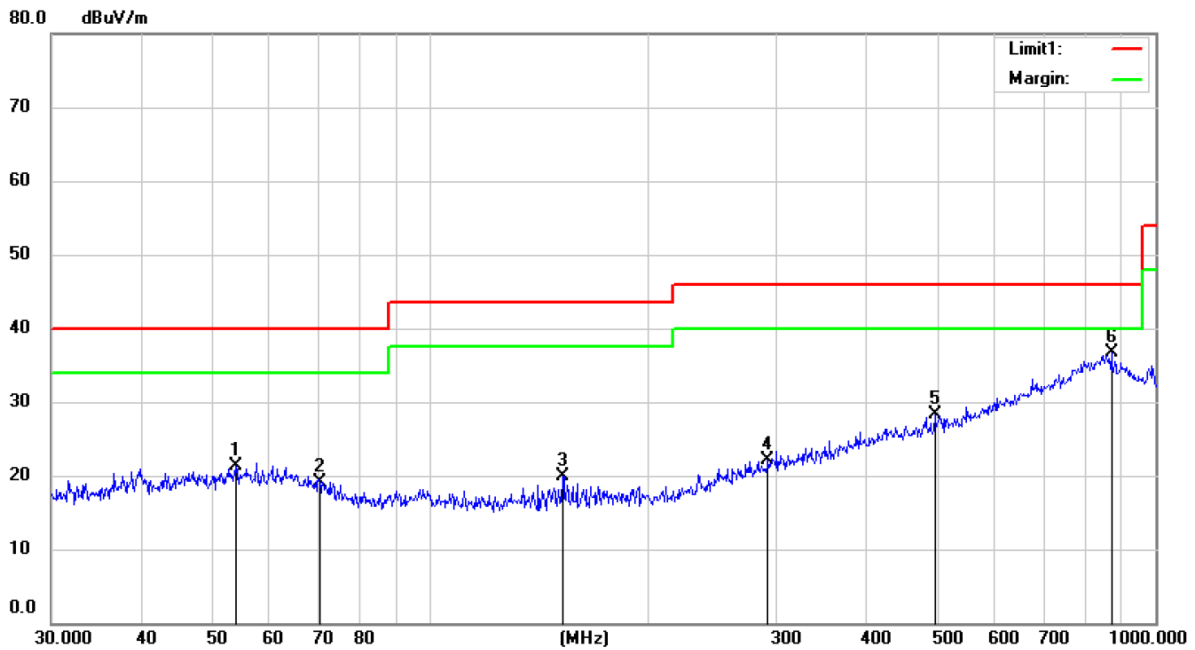


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 25.7 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC 3.7V form Battery Humidity: 55 %
 Mode: BT 2441
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		53.8818	29.95	-8.70	21.25	40.00	-18.75	QP		
2		70.3365	29.12	-9.92	19.20	40.00	-20.80	QP		
3		152.1297	31.16	-11.27	19.89	43.50	-23.61	QP		
4		292.0583	29.43	-7.35	22.08	46.00	-23.92	QP		
5		495.9344	29.86	-1.53	28.33	46.00	-17.67	QP		
6	*	869.1302	30.02	6.70	36.72	46.00	-9.28	QP		

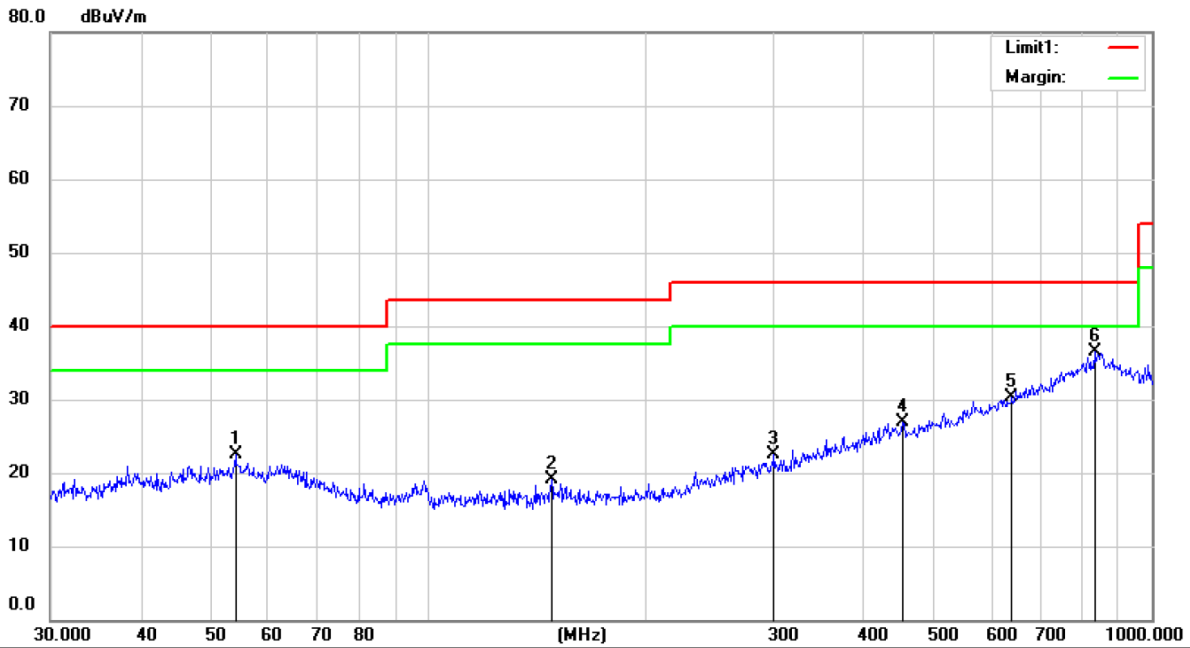

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 25.7 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC 3.7V form Battery Humidity: 55 %
 Mode: BT 2441
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		54.0711	31.14	-8.71	22.43	40.00	-17.57			QP
2		147.9214	30.46	-11.33	19.13	43.50	-24.37			QP
3		300.3672	29.47	-6.95	22.52	46.00	-23.48			QP
4		452.7197	29.51	-2.54	26.97	46.00	-19.03			QP
5		640.6110	28.23	2.04	30.27	46.00	-15.73			QP
6	*	833.3171	29.22	7.37	36.59	46.00	-9.41			QP

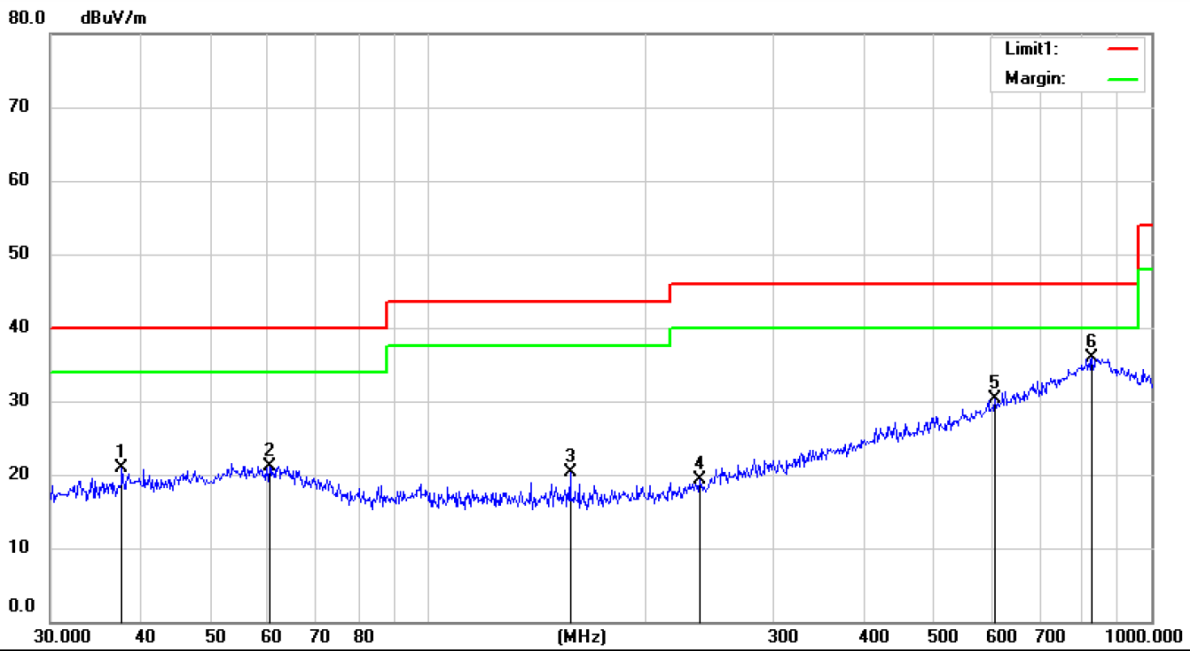

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 25.7 C

Limit: (RE)FCC PART 15 CLASS B


Power: DC 3.7V form Battery

Humidity: 55 %

Mode: BT 2480

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		37.6798	30.81	-9.94	20.87	40.00	-19.13	QP		
2		60.2801	29.80	-8.60	21.20	40.00	-18.80	QP		
3		157.0074	31.59	-11.35	20.24	43.50	-23.26	QP		
4		237.4760	29.20	-9.97	19.23	46.00	-26.77	QP		
5		607.7867	28.93	1.30	30.23	46.00	-15.77	QP		
6	*	827.4934	28.80	7.13	35.93	46.00	-10.07	QP		

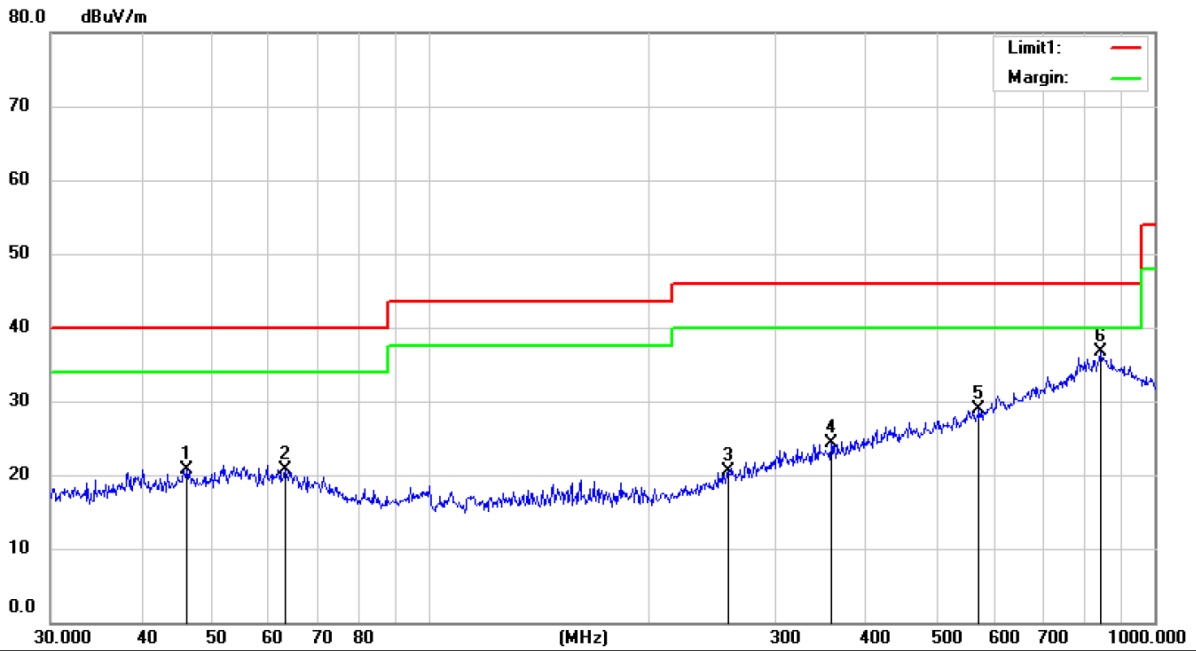

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 25.7 C

Limit: (RE)FCC PART 15 CLASS B

Power: DC 3.7V form Battery

Humidity: 55 %

Mode:BT 2480

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		46.1780	29.88	-9.13	20.75	40.00	-19.25			QP
2		63.0916	29.45	-8.68	20.77	40.00	-19.23			QP
3		258.3264	29.11	-8.70	20.41	46.00	-25.59			QP
4		357.9287	29.27	-4.96	24.31	46.00	-21.69			QP
5		572.6144	28.77	0.16	28.93	46.00	-17.07			QP
6	*	842.1296	28.99	7.65	36.64	46.00	-9.36			QP

9.8 CONDUCTED EMISSION TEST

9.8.1 Applicable Standard

According to FCC Part 15.207

According to IC RSS-Gen 8.8

9.8.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

9.8.3 Test Configuration

Test according to clause 7.3 conducted emission test setup


9.8.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
 Maximum procedure was performed on the highest emissions to ensure EUT compliance.
 Repeat above procedures until all frequency measured were complete.

9.8.5 Test Results

Pass

The AC120V &240V voltage have been tested, and the worst result recorded was report as below:

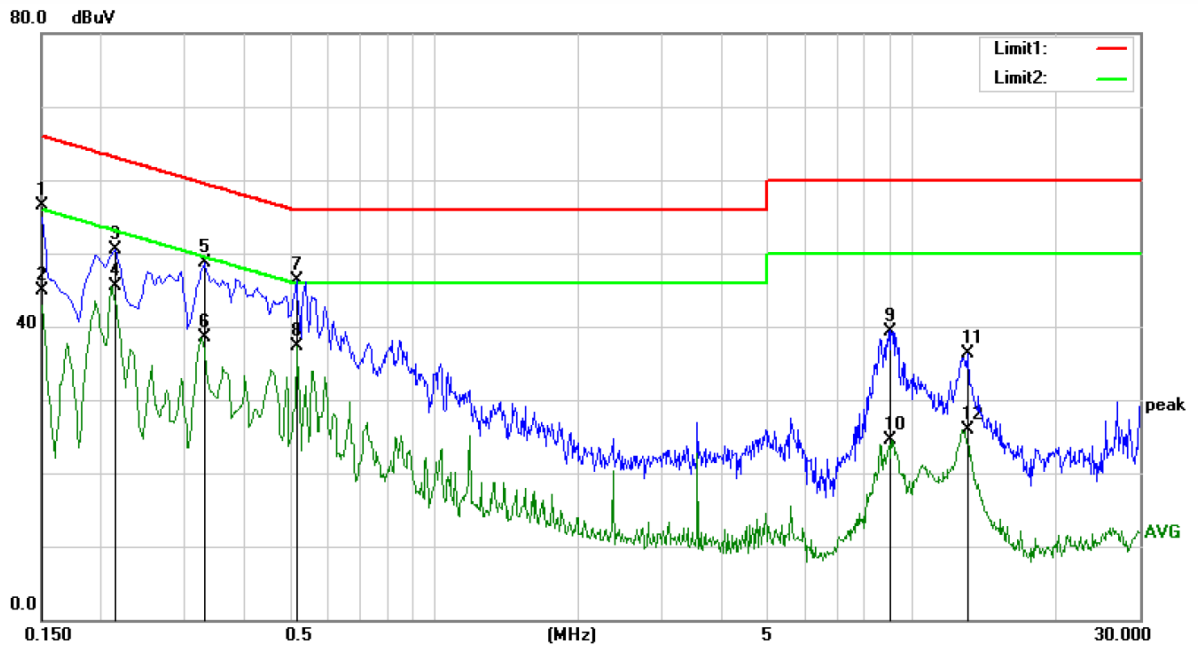

Site Conduction #1

Phase: **N**

Temperature: 21.9

Limit: (CE)FCC PART 15 class B_QP


Power: AC 120V/60Hz

Humidity: 58 %

Mode: BT mode

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	46.89	9.54	56.43	66.00	-9.57	QP	
2		0.1500	35.43	9.54	44.97	56.00	-11.03	AVG	
3		0.2150	40.97	9.54	50.51	63.01	-12.50	QP	
4	*	0.2150	35.99	9.54	45.53	53.01	-7.48	AVG	
5		0.3300	39.13	9.53	48.66	59.45	-10.79	QP	
6		0.3300	28.89	9.53	38.42	49.45	-11.03	AVG	
7		0.5150	36.82	9.53	46.35	56.00	-9.65	QP	
8		0.5150	27.87	9.53	37.40	46.00	-8.60	AVG	
9		9.0550	29.74	9.66	39.40	60.00	-20.60	QP	
10		9.0550	14.93	9.66	24.59	50.00	-25.41	AVG	
11		13.0800	26.49	9.76	36.25	60.00	-23.75	QP	
12		13.0800	16.12	9.76	25.88	50.00	-24.12	AVG	

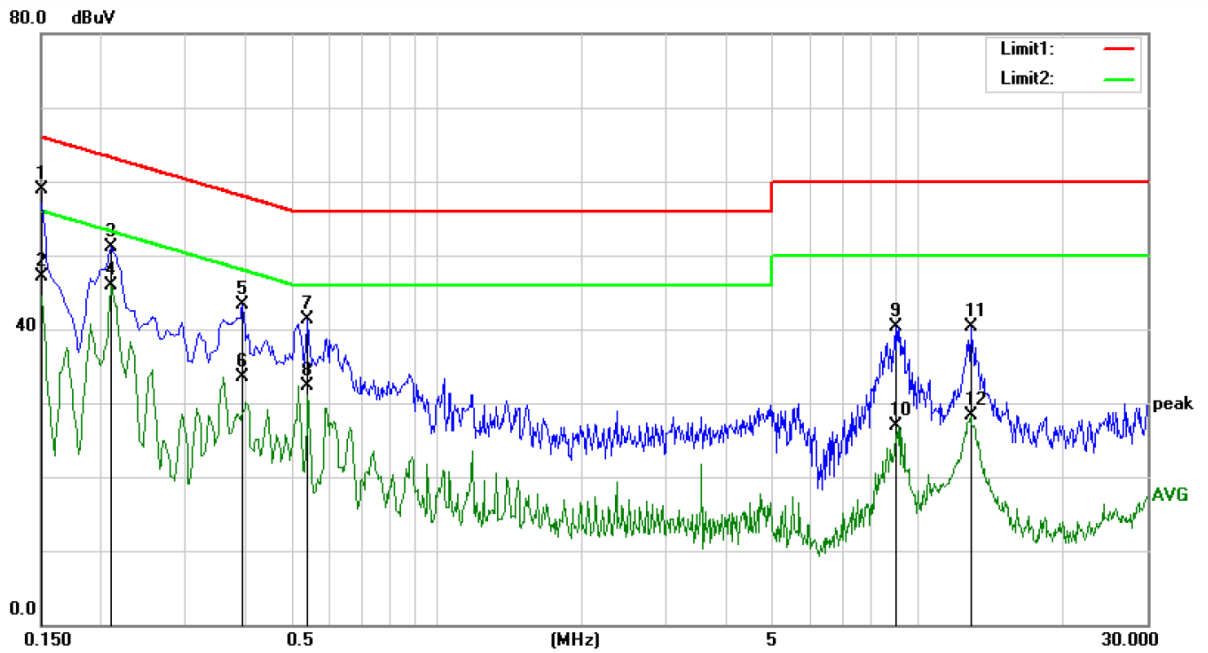

Site Conduction #1 Phase: **L1** Temperature: 21.9
 Limit: (CE)FCC PART 15 class B_QP Power: AC 120V/60Hz Humidity: 58 %
 Mode: BT mode
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1500	49.35	9.54	58.89	66.00	-7.11	QP	
2		0.1500	37.53	9.54	47.07	56.00	-8.93	AVG	
3		0.2100	41.61	9.54	51.15	63.21	-12.06	QP	
4		0.2100	36.44	9.54	45.98	53.21	-7.23	AVG	
5		0.3950	33.86	9.53	43.39	57.96	-14.57	QP	
6		0.3950	23.97	9.53	33.50	47.96	-14.46	AVG	
7		0.5400	31.75	9.53	41.28	56.00	-14.72	QP	
8		0.5400	22.70	9.53	32.23	46.00	-13.77	AVG	
9		9.0050	30.70	9.66	40.36	60.00	-19.64	QP	
10		9.0050	17.27	9.66	26.93	50.00	-23.07	AVG	
11		12.9050	30.52	9.75	40.27	60.00	-19.73	QP	
12		12.9050	18.64	9.75	28.39	50.00	-21.61	AVG	

9.9 ANTENNA APPLICATION

9.9.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
FCC 47 CFR Part 15.247 (b)	If transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.
RSS-Gen Section 6.8	The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.
RSS-247 Section 5.4	If the transmitter employs an antenna system that emits multiple directional beams, but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device (i.e. the sum of the power supplied to all antennas, antenna elements, staves, etc., and summed across all carriers or frequency channels) shall not exceed the applicable output power limit. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

9.9.2 Result

PASS.

- Note:
- Antenna use a permanently attached antenna which is not replaceable.
 - Not using a standard antenna jack or electrical connector for antenna replacement
 - The antenna has to be professionally installed (please provide method of installation)

Please refer to the attached document Internal Photos to show the antenna connector.

----- END OF REPORT -----