

FCC PART 15.247

EMI MEASUREMENT AND TEST REPORT  
For

Jovision Technology Co.,Ltd.

Floor11,Building D,In-hi Tech Square,No.2008 Xinluo Street,Jinan,Shandong,China

**FCC ID:2AEW9JVS-H210**



Trade:

This Report Concerns: Original Report	Equipment Type: IP CAMERA With WIFI
Test Engineer:	Lisa Chen <i>Lisa Chen</i>
Report No.:	BSL20150619-1
Receive EUT Date/Test Date:	June 9, 2015/ June 9 - June 19, 2015
Reviewed By:	Mike moo <i>Mike moo</i>
Prepared By:	<b>BSL Testing Co.,LTD.</b> NO. 24, ZH Park, Nantou, Shenzhen, 518000 China Tel: 86- 755-26508703 Fax: 86- 755-26508703

## TABLE OF CONTENTS

<b>1.</b>	<b>GENERAL INFORMATION .....</b>	<b>4</b>
1.1.	Report information .....	4
1.2.	Measurement Uncertainty .....	4
<b>2.</b>	<b>PRODUCT DESCRIPTION .....</b>	<b>5</b>
2.1.	EUT Description .....	5
2.2.	Block Diagram of EUT Configuration.....	6
2.3.	Support Equipment List .....	6
2.4.	Test Conditions .....	6
<b>3.</b>	<b>TEST RESULTS SUMMARY .....</b>	<b>7</b>
	Modifications .....	7
<b>4.</b>	<b>TEST EQUIPMENT USED .....</b>	<b>8</b>
<b>5.</b>	<b>§15.203 - ANTENNA REQUIREMENT .....</b>	<b>9</b>
5.1.	Standard Applicable.....	9
5.2.	Antenna Connector Construction.....	9
5.3.	Result .....	9
<b>6.</b>	<b>§15.207 - CONDUCTED EMISSIONS.....</b>	<b>10</b>
6.1.	Applicable Standard.....	10
6.2.	Test Procedure .....	10
6.3.	Conducted Power line Emission Limits.....	10
6.4.	Block Diagram of Test Setup.....	10
6.5.	Conducted Power Line Test Result.....	11
<b>7.</b>	<b>§15.209, §15.205, §15.247(D) - SPURIOUS EMISSIONS .....</b>	<b>13</b>
7.1.	Test Equipment .....	13
7.2.	Test Procedure .....	13
7.3.	Radiated Test Setup .....	13
7.4.	Radiated Emission Limit.....	15
7.5.	Radiated Emission Test Result .....	16
7.6.	Conducted Emission Method.....	21
7.7.	Test Requirement: .....	21
7.8.	Limit:.....	21
7.9.	Test Setup.....	21
7.10.	Test Result .....	21
<b>8.</b>	<b>§15.247(A) (2) – 6DB BANDWIDTH TESTING.....</b>	<b>28</b>
8.1.	Test Equipment .....	28
8.2.	Test Procedure .....	28
8.3.	Applicable Standard.....	28
8.4.	Test Result:Pass. ....	28
<b>9.</b>	<b>§15.247(B) (3) - MAXIMUM OUTPUT POWER .....</b>	<b>35</b>
9.1.	Test Equipment .....	35
9.2.	Test Procedure .....	35

9.3.	Applicable Standard.....	35
9.4.	Test Result .....	36
<b>10.</b>	<b>§15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE .....</b>	<b>37</b>
10.1.	Test Equipment .....	37
10.2.	Test Procedure .....	37
10.3.	Applicable Standard.....	37
10.4.	Test Result .....	37
<b>11.</b>	<b>§15.247(E) - POWER SPECTRAL DENSITY .....</b>	<b>41</b>
11.1.	Test Equipment .....	41
11.2.	Test Procedure .....	41
11.3.	Applicable Standard.....	41
11.4.	Test Result .....	41

## 1. GENERAL INFORMATION

### 1.1. Report information

- 1.1.1.This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that BSL approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that BSL in any way guarantees the later performance of the product/equipment.
- 1.1.2.The sample/s mentioned in this report is/are supplied by Applicant, BSL therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 1.1.3.Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through BSL, unless the applicant has authorized BSL in writing to do so.

#### Test Facility -

The test site used to collect the radiated data is located on the address of BSL Testing Co.,LTD.

(FCC Registered Test Site Number: 191509) on

NO. 24, ZH Park, Nantou, Shenzhen, 518000 China

The Test Site is constructed and calibrated to meet the FCC requirements.


### 1.2. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	+/-1.25dB
2	RF Power, Conducted	+/-0.20dB
3	Spurious emissions, conducted	+/-0.33dB
4	All emissions, radiated (<1G)	+/-3.47dB
5	All emissions, radiated (>1G)	+/-3.82dB
6	Temperature	+/-0.5°CdB
7	Humidity	+/-2%

## 2. PRODUCT DESCRIPTION

### 2.1. EUT Description

Applicant	:	Jovision Technology Co.,Ltd.
Address	:	Floor11,Building D,In-hi Tech Square,No.2008 Xinluo Street,Jinan,Shandong,China
Manufacturer	:	Jovision Technology Co.,Ltd.
Address	:	Floor11,Building D,In-hi Tech Square,No.2008 Xinluo Street,Jinan,Shandong,China
EUT Description	:	IP CAMERA With WIFI
Modulation	:	802.11b: DSSS(11/5.5/2/1Mbps) 802.11g: OFDM(54/48/36/24/18/12/9/6Mbps) 802.11n(20MHz): OFDM (up to 72.2 Mbps) software not supported n (40MHz). (disabled by software).
Wi-fi Frequency Band	:	IEEE 802.11b/g/n20:2412-2462MHz
Number of Channels	:	IEEE 802.11b/g/n20: 11 Channels.
Model Number	:	JVS-H210,J1MP4MM210F,VS-DFCW-121,WI5-H210,JVS-H302, JVS-H600,JVS-H600-0130,VS-DDCW-120,JVS-H301-A1, JVS-H302-A2
Trade Name	:	
Antenna gain	:	0dBi
Antenna type	:	integration
Power supply	:	AC 120V/60Hz
Hardware version	:	WIFI PCB:CK-W-R188-UM Main PCB:JSIC2H10MBV02
Software version	:	V02
Serial Number	:	20150619

The series products, model name:

JVS-H210,J1MP4MM210F,VS-DFCW-121,WI5-H210,JVS-H302,JVS-H600,JVS-H600-0130,VS-DDCW-120,JVS-H301-A1,JVS-H302-A2 have the same circuit diagram,PCB layout, software, RF Module, Features and functionality. The differences are the model name, so, we select JVS-H210 to test.

## 2.2. Block Diagram of EUT Configuration




Figure 1 EUT Setup

## 2.3. Support Equipment List

Table 2 Ancillary Equipment

Name	Model No	S/N	Manufacturer	Used (Y/N)
AC adapter	A31-501000	-	I.T.E	Y

## 2.4. Test Conditions

Temperature: 23~25°C  
 Relative Humidity: 50~63 %

After the preliminary test, we found to emit the worst emissions and therefore had been tested under operating condition.

For 802.11b, 802.11g, and 802.11n-HT20 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11.

IEEE 802.11b:1Mbps data rate were chosen for full testing.

IEEE 802.11g:6Mbps data rate were chosen for full testing.

IEEE 802.11n-HT20:6.5Mbps data rate were chosen for full testing.

The EUT configured to transmit continuously(duty cycle=100%,average correction factor=0).

the test procedure mentioned: KDB 558074 D01 V03r03

GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER §15.247

### 3. TEST RESULTS SUMMARY

#### FCC 15 Subpart C, Paragraph 15.247 :2013

FCC Rules	Description of Test	Result
FCC§15.203	Antenna Requirement	Compliance
FCC§15.207 (a)	AC Line Conducted Emissions	Compliance
FCC§15.247(d)	Spurious Emissions at Antenna Port	Compliance
FCC§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
FCC§15.247 (a)(2)	6dB Bandwidth	Compliance
FCC§15.247(b)(3)	Maximum Peak Output Power	Compliance
FCC§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
FCC§15.247(e)	Power Spectral Density	Compliance

#### Modifications

No modification was made.

#### 4. TEST EQUIPMENT USED

EQUIPMENT/FACILITIES	MANUFACTURER	MODEL	SERIAL NO.	DATE OF CAL.	CAL. INTERVAL
3m Semi-Anechoic Chamber	Chengyu Electron	9 (L)*6 (W)* 6 (H)	BSL086	Aug. 23 2014	1 Year
EMI Test Receiver	Rohde & Schwarz	ESC13	BSL001	Sep. 28 2014	1 Year
BiConiLog Antenna	Rohde & Schwarz	HL562 (30MHz-3GHz)	BSL009	Sep. 28 2014	1 Year
Double -ridged waveguide horn	Rohde & Schwarz	BBHA9120D (1-18GHz)	BSL008	Aug. 27 2014	1 Year
Horn Antenna	AHS	SAS-574 (18GHz-40GHz)	BSL072	Dec. 28 2014	1 Year
Cable	PUTIANLE	BSL045 (9 kHz-40GHz)	BSL045	Aug. 27 2014	1 Year
Cable	PUTIANLE	BSL046 (9 kHz-40GHz)	BSL046	Aug. 27 2014	1 Year
Cable	PUTIANLE	BSL047 (9 kHz-40GHz)	BSL047	Aug. 27 2014	1 Year
Amplifier(100kHz-40GHz)	R&S	SMR40	BSL007	Sep. 28 2014	1 Year
Band filter	Amindeon	82346	BSL049	Aug. 27 2014	1 Year
Active Loop Antenna	Schwarzbeck	FMZB1519 (9 kHz - 30 MHz)	BSL011	Sep. 28 2014	1 Year
Coaxial Switch	YUANFANG	TA218B	BSL004	Aug. 27 2014	1 Year
Spectrum analyzer	Rohde & Schwarz	FSP40	BSL049	Sep. 28 2014	1 Year
Shielding Room	zhongyu Electron	7.0(L)x3.0(W)x3.0(H)	BSL085	Sep. 28 2014	1 Year
EMI Test Receiver	R&S	ESPI	BSL002	Sep. 28 2014	1 Year
10dB Pulse Limita	R&S	BSL003	BSL003	Sep. 28 2014	1 Year
Coaxial Switch	PUTIANLE	TA218B	BSL004	Aug. 27 2014	1 Year
LISN	Rohde & Schwarz	ESH3-Y5	BSL005	Sep. 28 2014	1 Year
Coaxial Cable	PUTIANLE	BSL048 (9 kHz-40GHz)	BSL048	Aug. 27 2014	1 Year
EMI TEST SOFTWARE	AUDIX	E3	N/A	N/A	N/A
Power Meter	R&S	NRVS	GTS216	Apr. 6, 2015	1 Year
Power Sensor	R&S	NRV-Z33	GTS220	Apr. 6, 2015	1 Year



## 5. §15.203 - ANTENNA REQUIREMENT

### 5.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.


Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 5.2. Antenna Connector Construction

The antenna used for this product is a PIFA antenna.  
the type of antenna :

1. for the EUT built-in PIFA ANT. Please look at the picture.

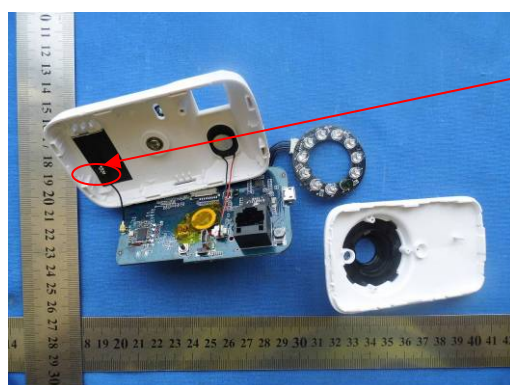

Welding point

2. for the WiFi module ipex connector.  
Refer to the product photo.

### 5.3. Result

Compliance

## 6. §15.207 - CONDUCTED EMISSIONS

### 6.1. Applicable Standard

The specification used was with the FCC Part 15.207 limits.

### 6.2. Test Procedure


During the conducted emission test, the EUT was connected to the outlet of the LISN. Maximizing procedure was performed on the six (6) highest emissions of the EUT. All data was recorded in the Quasi-peak and average detection mode.

### 6.3. Conducted Power line Emission Limits

FCC Part 15 Paragraph 15.207 (dBuV)		
Frequency Range (MHz)	Class A QP/AV	Class B QP/AV
0.15-0.5	79/66	66-56/56-46
0.5-5.0	73/60	56/46
5.0-30.0	73/60	60/50

Note: In the above table, the tighter limit applies at the band edges.

### 6.4. Block Diagram of Test Setup

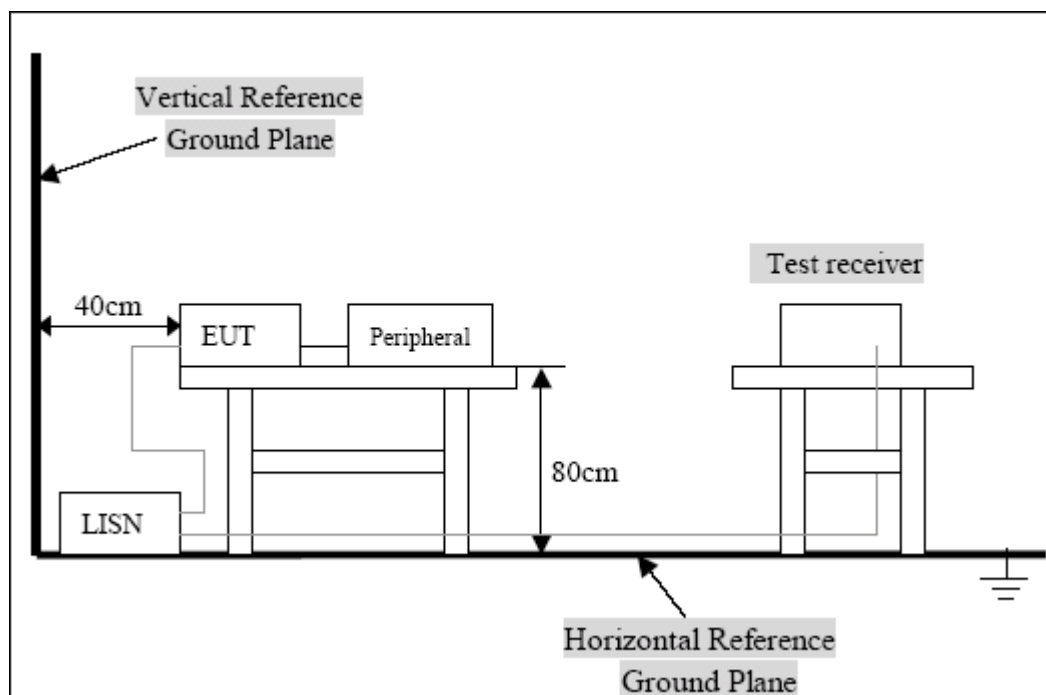


### 6.5. Conducted Power Line Test Result

**PASS**

**test AC power (120V/60Hz)**

**The worst test mode: WiFi Tx 802.11b 2412MHz**

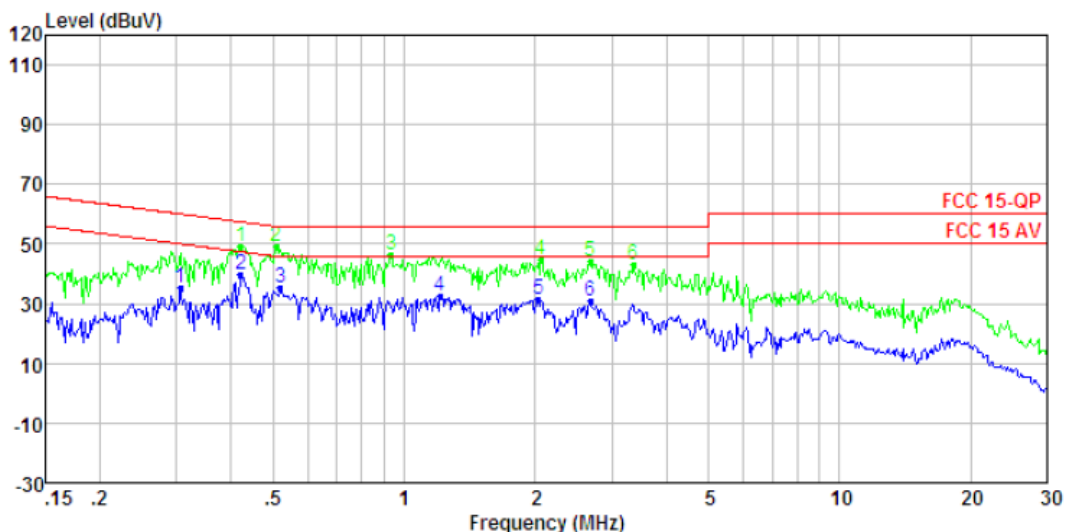

Condition:


: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		
1	0.307	35.6	50.1	-14.5	Average	LINE
2 Max	0.421	40.0	47.4	-7.4	Average	LINE
3	0.521	35.5	46.0	-10.5	Average	LINE
4	1.210	32.5	46.0	-13.5	Average	LINE
5	2.033	31.4	46.0	-14.6	Average	LINE
6	2.678	30.9	46.0	-15.1	Average	LINE

Condition:

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		
1	0.421	49.4	57.4	-8.0	QP	LINE
2 Max	0.510	49.0	56.0	-7.0	QP	LINE
3	0.933	46.2	56.0	-9.8	QP	LINE
4	2.066	44.9	56.0	-11.1	QP	LINE
5	2.678	44.2	56.0	-11.8	QP	LINE
6	3.364	42.8	56.0	-13.2	QP	LINE

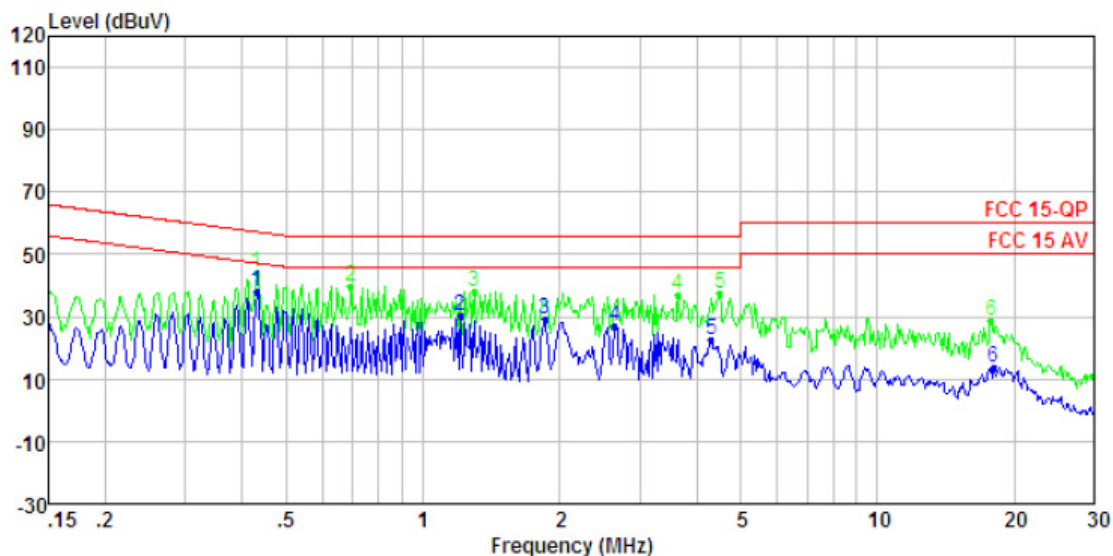

Condition:

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		
1 Max	0.431	38.0	47.2	-9.2	Average	NEUTRAL
2	1.210	30.3	46.0	-15.7	Average	NEUTRAL
3	1.858	29.0	46.0	-17.0	Average	NEUTRAL
4	2.650	26.9	46.0	-19.1	Average	NEUTRAL
5	4.315	22.3	46.0	-23.7	Average	NEUTRAL
6	18.039	13.9	50.0	-36.1	Average	NEUTRAL

Condition:

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		
1 Max	0.431	44.3	57.2	-12.9	QP	NEUTRAL
2	0.694	40.0	56.0	-16.0	QP	NEUTRAL
3	1.296	38.2	56.0	-17.8	QP	NEUTRAL
4	3.642	37.1	56.0	-18.9	QP	NEUTRAL
5	4.501	37.3	56.0	-18.7	QP	NEUTRAL
6	17.755	28.5	60.0	-31.5	QP	NEUTRAL

## 7. §15.209, §15.205, §15.247(D) - Spurious Emissions

### 7.1. Test Equipment

Please refer to section 5 this report.

### 7.2. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level.

Calibrated Loop antenna is used as receiving antenna for frequencies below 30MHz, Calibrated Bilog antenna is used as receiving antenna for frequencies between 30 MHz and 1 GHz, Calibrated Horn antenna is used as receiving antenna for frequencies above 1000MHz. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver is set at 9kHz in below 30MHz. and set at 120kHz in 30-1000MHz, and non-restricted band:RBW=100kHz, restricted band:RBW=1MHz in above 1000MHz.


The frequency range from 9kHz to 25GHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Peak detector and Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.


Through three orthogonal axes to determine which attitude and equipment arrangement produces the highest emission relative to the limit. And Y direction is worst mode.

### 7.3. Radiated Test Setup


#### (A) Radiated Emission Test Set-Up, Frequency Below 30MHz

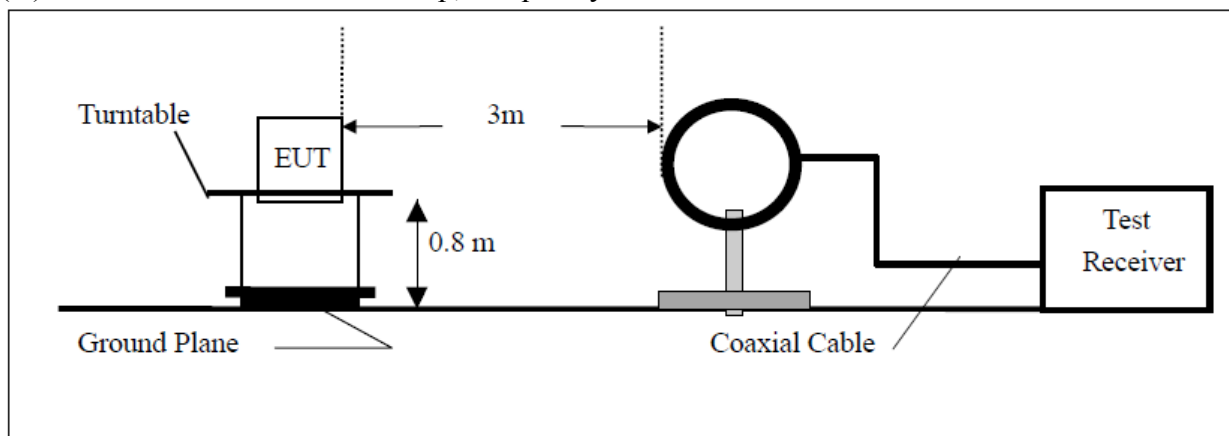

#### (B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

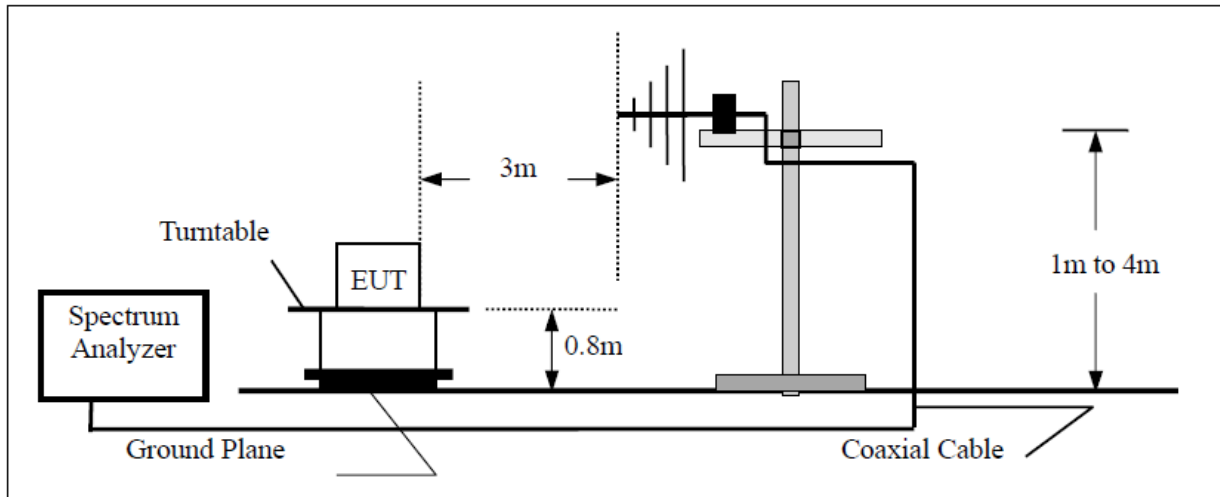

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

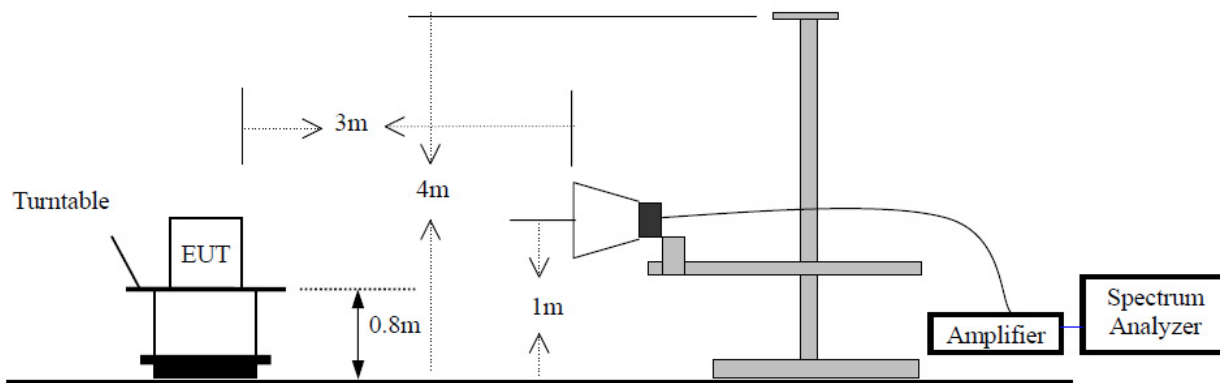

#### 7.4. Radiated Emission Limit

Frequency (MHz)	Limit			The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.
	Field Strength of Quasi-peak Value (microvolts/m)	Field Strength of Quasi-peak Value (dB $\mu$ V/m)	Measurement distance (m)	
0.009 - 0.490	2400/F(kHz)	/	300	
0.490 - 1.705	24000/F(kHz)	/	30	
1.705-30	30	29.5	30	
30 - 88	100	40	3	
88 - 216	150	43.5	3	
216 - 960	200	46	3	
Above 960	500	54	3	

Note: (1) RF Voltage (dBuV)=20 log Voltage(uV)

(2) In the Above Table,the tighter limit applies at the band edges.

(3) Distancce refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

### 7.5. Radiated Emission Test Result

**For below 9kHz-30MHz Spurious**

Freq. (MHz)	Emission(dBuV/m) PK / AV	Limits(dBuV/m) PK / AV	Margin (dB)
-	-	-	-
-	-	-	-


Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.

**For 30M-1000MHz Spurious**

**The worst test mode: WiFi Tx 802.11b 2412MHz**


Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

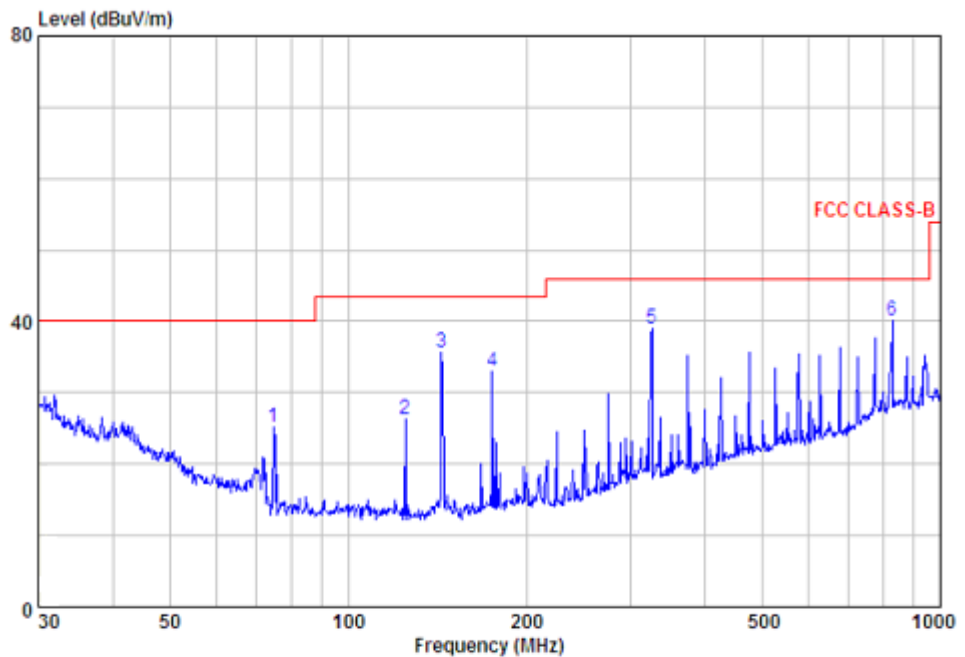

Condition : FCC CLASS-B 3m HORIZONTAL  
 : RBW:120.000KHz VBW:300.000KHz SWT:Auto

	Freq	Limit	Line	Level	Over	Limit	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dBuV/m	dB	dB		
1	74.894	40.0	25.1	-14.9	QP		HORIZONTAL	
2	124.867	43.5	26.3	-17.2	QP		HORIZONTAL	
3	143.777	43.5	35.8	-7.7	QP		HORIZONTAL	
4	175.156	43.5	32.9	-10.6	QP		HORIZONTAL	
5	325.751	46.0	39.1	-6.9	QP		HORIZONTAL	
6 max	829.099	46.0	40.1	-5.9	QP		HORIZONTAL	



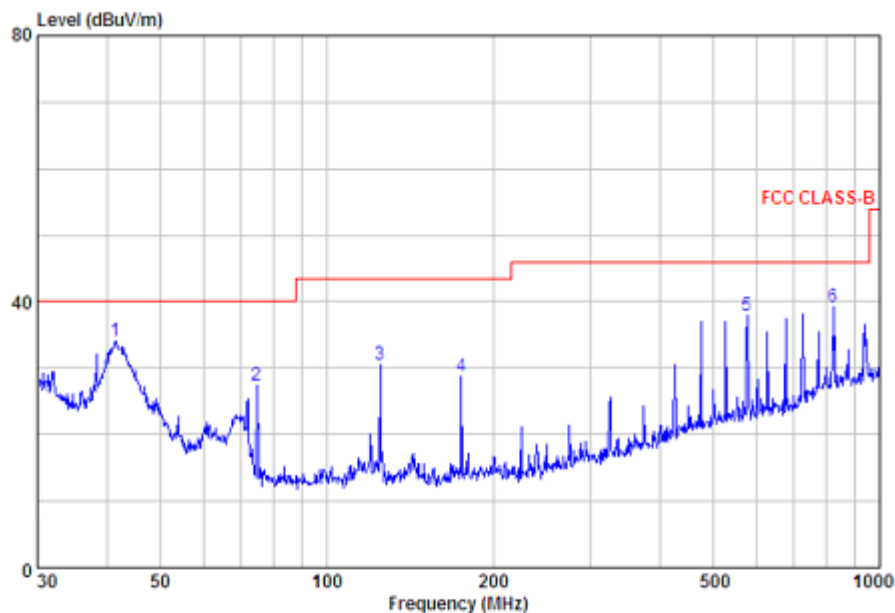

Condition : FCC CLASS-B 3m VERTICAL  
 : RBW:120.000KHz VBW:300.000KHz SWT:Auto

	Limit	Over			
1 max	Freq	Line	Level	Limit	Remark
	MHz	dBuV/m	dBuV/m	dB	Pol/Phase
1 max	41.569	40.0	34.0	-6.0	QP VERTICAL
2	74.894	40.0	27.4	-12.6	QP VERTICAL
3	124.867	43.5	30.6	-12.9	QP VERTICAL
4	175.156	43.5	28.8	-14.7	QP VERTICAL
5	576.649	48.0	38.0	-8.0	QP VERTICAL
6	823.274	48.0	39.3	-8.7	QP VERTICAL

**For 1000MHz-25000MHz Spurious****802.11b Mode:**

Indicated		Detector (PK/Ave.)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247/15.209			
Frequency (MHz)	S.A. Reading (dBµV)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Comment
Low Channel (2412 MHz)												
7236	31.07	Ave.	300	1.1	H	39.0	5.22	26.64	48.65	54	5.35	harmonic
7236	28.09	Ave.	150	1.1	V	37.7	5.22	26.64	44.37	54	9.63	harmonic
4824	29.35	Ave.	185	1.2	H	36.6	4.3	26.75	43.5	54	10.5	harmonic
2389.7	31.59	Ave.	0	1.0	V	30.6	2.98	26.83	38.34	54	15.66	spurious
2389.4	28.41	Ave.	75	1.0	H	30.6	2.98	26.83	35.16	54	18.84	spurious
7236	37.37	PK	300	1.1	H	39.0	5.22	26.64	54.95	74	19.05	harmonic
2389.7	45.21	PK	0	1.0	V	30.6	2.98	26.83	51.96	74	22.04	spurious
4824	18.55	Ave.	285	1.0	V	35.4	4.3	26.75	31.5	54	22.5	harmonic
7236	35.22	PK	150	1.0	V	37.7	5.22	26.64	51.5	74	22.5	harmonic
2389.4	42.55	PK	75	1.0	H	30.6	2.98	26.83	49.3	74	24.7	spurious
4824	34.83	PK	185	1.2	H	36.6	4.3	26.75	48.98	74	25.02	harmonic
4824	29.36	PK	285	1.0	V	35.4	4.3	26.75	42.31	74	31.69	harmonic
Middle Channel (2437 MHz)												
7311	31.66	Ave.	300	1.2	H	39.0	5.09	26.64	49.11	54	4.89	harmonic
7311	27.69	Ave.	150	1.1	V	37.7	5.09	26.64	43.84	54	10.16	harmonic
4874	29.33	Ave.	185	1.2	H	36.6	4.36	26.75	43.54	54	10.46	harmonic
7311	37.94	PK	300	1.2	H	39.0	5.09	26.64	55.39	74	18.61	harmonic
7311	34.06	PK	150	1.1	V	37.7	5.09	26.64	50.21	74	23.79	harmonic
4874	16.18	Ave.	285	1.0	V	35.4	4.36	26.75	29.19	54	24.81	harmonic
4874	34.27	PK	185	1.2	H	36.6	4.36	26.75	48.48	74	25.52	harmonic
4874	29.47	PK	285	1.0	V	35.4	4.36	26.75	42.48	74	31.52	harmonic
High Channel (2462 MHz)												
7386	32.12	Ave.	310	1.2	H	39.0	5.02	26.64	49.28	54	4.72	harmonic
2500	38.84	Ave.	0	1.0	V	30.6	3.11	26.88	45.45	54	8.55	spurious
7386	28.9	Ave.	150	1.1	V	37.7	5.02	26.64	44.76	54	9.24	harmonic
4924	27.51	Ave.	185	1.2	H	36.6	4.40	26.75	41.54	54	12.46	harmonic
2483.5	28.94	Ave.	75	1.0	H	30.6	3.11	26.88	35.55	54	18.45	spurious
7386	38.02	PK	310	1.2	H	39.0	5.02	26.64	55.18	74	18.82	harmonic
2500	48.55	PK	0	1.0	V	30.6	3.11	26.88	55.16	74	18.84	spurious
7386	35.2	PK	150	1.1	V	37.7	5.02	26.64	51.06	74	22.94	harmonic
4924	32.12	Ave.	280	1.0	V	35.4	4.40	26.75	28.81	54	25.19	harmonic
2483.5	38.84	PK	75	1.0	H	30.6	3.11	26.88	48.53	74	25.47	spurious
4924	28.9	PK	185	1.2	H	36.6	4.40	26.75	48.14	74	25.86	harmonic
4924	27.51	PK	280	1.0	V	35.4	4.40	26.75	42.24	74	31.76	harmonic

**802.11g Mode:**

Indicated		Detector (PK/Ave)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247/15.209			
Frequency (MHz)	S.A. Reading (dBμV)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
Low Channel (2412 MHz)												
2390	61.72	PK	0	1.0	V	30.6	2.98	26.83	68.47	74	5.53	spurious
2390	39.71	Ave.	0	1.0	V	30.6	2.98	26.83	46.46	54	7.54	spurious
2388.6	59.38	PK	73	1.0	H	30.6	2.98	26.83	66.13	74	7.87	spurious
2388.6	39.02	Ave.	73	1.0	H	30.6	2.98	26.83	45.77	54	8.23	spurious
7236	44.08	PK	300	1.1	H	39	5.22	26.64	61.66	74	12.34	harmonic
7236	23.73	Ave.	300	1.1	H	39	5.22	26.64	41.31	54	12.69	harmonic
7236	18.64	Ave.	150	1.1	V	37.7	5.22	26.64	34.92	54	19.08	harmonic
7236	36.67	PK	150	1.0	V	37.7	5.22	26.64	52.95	74	21.05	harmonic
4824	17.67	Ave.	130	1.5	H	36.6	4.3	26.75	31.82	54	22.18	harmonic
4824	16.36	Ave.	60	1.8	V	35.4	4.3	26.75	29.31	54	24.69	harmonic
4824	32.33	PK	130	1.5	H	36.6	4.3	26.75	46.48	74	27.52	harmonic
4824	28.88	PK	60	1.8	V	35.4	4.3	26.75	41.83	74	32.17	harmonic
Middle Channel (2437 MHz)												
7311	44.37	PK	300	1.2	H	39.0	5.09	26.64	61.82	74	12.18	harmonic
7311	24.02	Ave.	300	1.2	H	39.0	5.09	26.64	41.47	54	12.53	harmonic
7311	19.07	Ave.	150	1.2	V	37.7	5.09	26.64	35.22	54	18.78	harmonic
7311	39.05	PK	150	1.2	V	37.7	5.09	26.64	55.2	74	18.8	harmonic
4874	17.65	Ave.	185	1.2	H	36.6	4.36	26.75	31.86	54	22.14	harmonic
4874	15.84	Ave.	280	1.1	V	35.4	4.36	26.75	28.85	54	25.15	harmonic
4874	32.15	PK	185	1.2	H	36.6	4.36	26.75	46.36	74	27.64	harmonic
4874	29.27	PK	280	1.1	V	35.4	4.36	26.75	42.28	74	31.72	harmonic
High Channel (2462 MHz)												
2483.6	61.83	PK	0	1.0	V	30.6	3.11	26.88	68.66	74	5.34	spurious
2483.6	41.72	Ave.	0	1.0	V	30.6	3.11	26.88	48.55	54	5.45	spurious
2483.6	60.1	PK	73	1.0	H	30.6	3.11	26.88	66.93	74	7.07	spurious
2483.6	38.77	Ave.	73	1.0	H	30.6	3.11	26.88	45.6	54	8.4	spurious
7386	43.76	PK	300	1.1	H	39.0	5.02	26.64	61.14	74	12.86	harmonic
7386	22.69	Ave.	300	1.1	H	39.0	5.02	26.64	40.07	54	13.93	harmonic
7386	18.12	Ave.	150	1.1	V	37.7	5.02	26.64	34.2	54	19.8	harmonic
7386	36.93	PK	150	1.1	V	37.7	5.02	26.64	53.01	74	20.99	harmonic
4924	15.58	Ave.	185	1.2	H	36.6	4.40	26.75	29.83	54	24.17	harmonic
4924	15.85	Ave.	280	1.2	V	35.4	4.40	26.75	28.9	54	25.1	harmonic
4924	30.59	PK	185	1.2	H	36.6	4.40	26.75	44.84	74	29.16	harmonic
4924	29.35	PK	280	1.2	V	35.4	4.40	26.75	42.4	74	31.6	harmonic

**802.11n-HT20 Mode:**

Indicated		Detector (PK/Ave)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247/15.209			
Frequency (MHz)	S.A. Reading (dBμV)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
Low Channel (2412 MHz)												
2389	61.73	PK	0	1.0	V	30.6	2.98	26.83	68.48	74	5.96	spurious
2390	58.51	PK	72	1.0	H	30.6	2.98	26.83	65.26	74	9.18	spurious
7236	44.37	PK	300	1.1	H	39.0	5.22	26.64	61.95	74	12.49	harmonic
2389	34.38	Ave.	0	1.0	V	30.6	2.98	26.83	41.13	54	13.31	spurious
7236	22.28	Ave.	300	1.1	H	39.0	5.22	26.64	39.86	54	14.58	harmonic
2390	31.9	Ave.	72	1.0	H	30.6	2.98	26.83	38.65	54	15.79	spurious
7236	18.34	Ave.	150	1.1	V	37.7	5.22	26.64	34.62	54	19.82	harmonic
7236	38.02	PK	150	1.0	V	37.7	5.22	26.64	54.3	74	20.14	harmonic
4824	15.64	Ave.	130	1.5	H	36.6	4.3	26.75	29.79	54	24.65	harmonic
4824	15.56	Ave.	60	1.8	V	35.4	4.3	26.75	28.51	54	25.93	harmonic
4824	33.03	PK	130	1.5	H	36.6	4.3	26.75	47.18	74	27.26	harmonic
4824	29.07	PK	60	1.8	V	35.4	4.3	26.75	42.02	74	32.42	harmonic
Middle Channel (2437 MHz)												
7311	44.46	PK	300	1.2	H	39.0	5.09	26.64	61.91	74	5.35	harmonic
7311	22.46	Ave.	300	1.2	H	39.0	5.09	26.64	39.91	54	7.35	harmonic
7311	18.41	Ave.	240	1.1	V	37.7	5.09	26.64	34.56	54	19.44	harmonic
7311	38.3	PK	240	1.1	V	37.7	5.09	26.64	54.45	74	19.55	harmonic
4874	15.68	Ave.	185	1.2	H	36.6	4.36	26.75	29.89	54	24.11	harmonic
4874	15.64	Ave.	280	1.1	V	35.4	4.36	26.75	28.65	54	25.35	harmonic
4874	33.09	PK	185	1.2	H	36.6	4.36	26.75	47.3	74	26.7	harmonic
4874	29.15	PK	280	1.1	V	35.4	4.36	26.75	42.16	74	31.84	harmonic
High Channel (2462 MHz)												
2483.5	61.58	PK	0	1.0	V	30.6	3.11	26.88	68.41	74	5.59	spurious
2483.5	58.13	PK	72	1.0	H	30.6	3.11	26.88	64.96	74	9.04	spurious
7386	44.35	PK	300	1.1	H	39.0	5.02	26.64	61.73	74	12.27	harmonic
2483.5	32.78	Ave.	0	1.0	V	30.6	3.11	26.88	39.61	54	14.39	spurious
7386	21.69	Ave.	300	1.1	H	39.0	5.02	26.64	39.07	54	14.93	harmonic
2483.5	31.22	Ave.	72	1.0	H	30.6	3.11	26.88	38.05	54	15.95	spurious
7386	18.15	Ave.	150	1.1	V	37.7	5.02	26.64	34.23	54	19.77	harmonic
7386	37.97	PK	150	1.1	V	37.7	5.02	26.64	54.05	74	19.95	harmonic
4924	15.66	Ave.	250	1.8	H	36.6	4.40	26.75	29.91	54	24.09	harmonic
4924	15.61	Ave.	60	1.8	V	35.4	4.40	26.75	28.66	54	25.34	harmonic
4924	33.04	PK	250	1.8	H	36.6	4.40	26.75	47.29	74	26.71	harmonic
4924	29.04	PK	60	1.8	V	35.4	4.40	26.75	42.09	74	31.91	harmonic

## 7.6. Conducted Emission Method

Please refer to section 5 this report.


### 7.7. Test Requirement:

FCC Part15 C Section 15.247 (d)

### 7.8. Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.


### 7.9. Test Setup

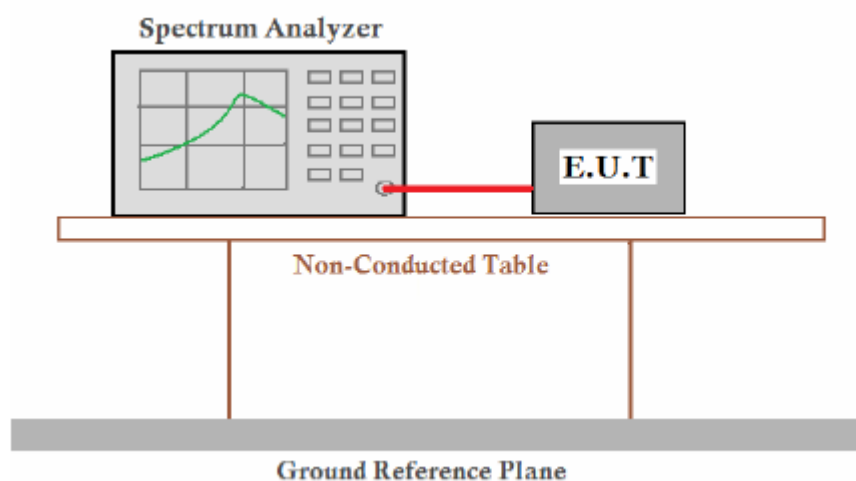

### 7.10. Test Result


Test plot as follows:

### 802.11b Low Channel 2412 MHz 30MHz~25GHz

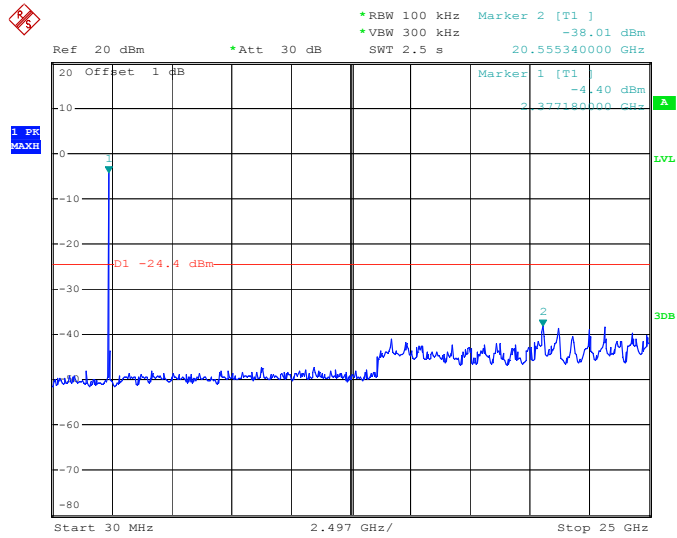


Note:Sweep points=250000pts

### 802.11b Middle Channel 2437 MHz 30MHz~25GHz

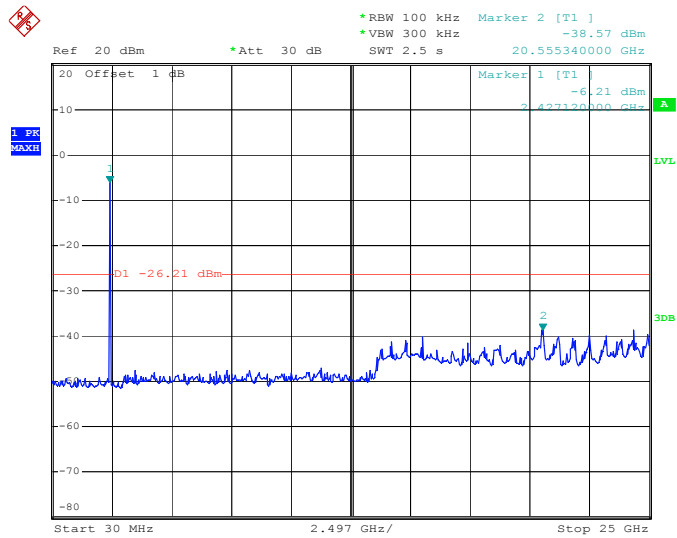


Note:Sweep points=250000pts

### 802.11b High channel 2462 MHz 30MHz~25GHz

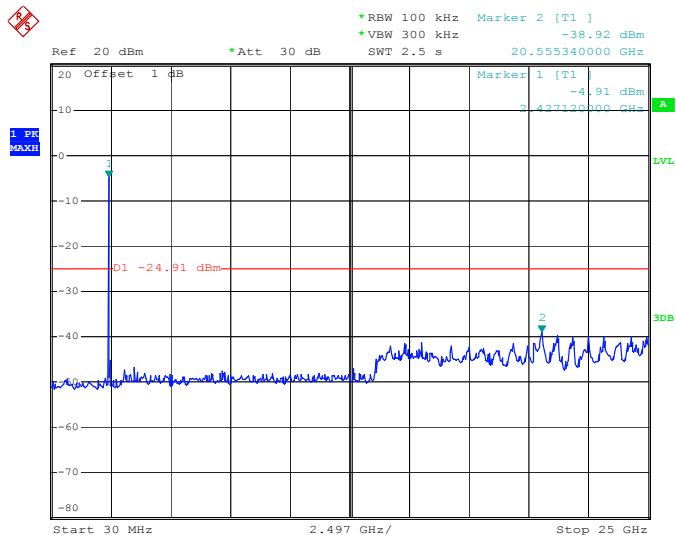


Note:Sweep points=250000pts

### 802.11g Low Channel 2412 MHz 30MHz~25GHz

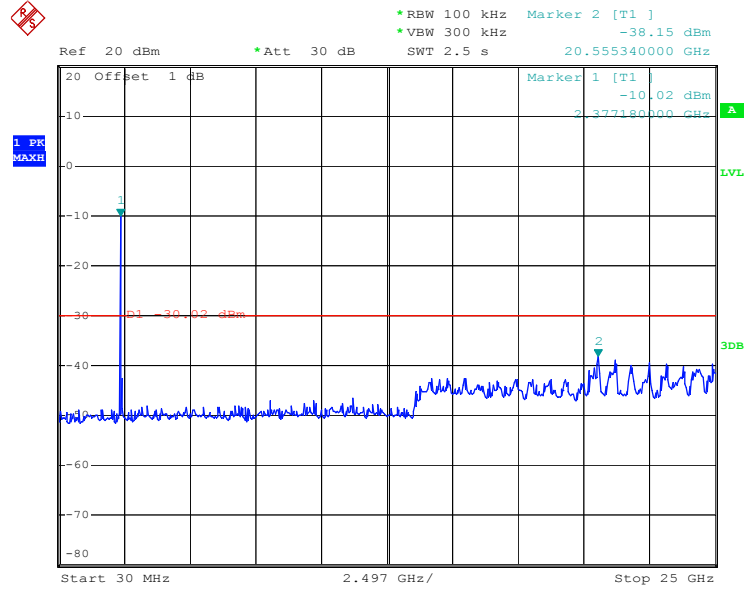

Note:Sweep points=250000pts


### 802.11g Middle Channel 2437 MHz 30MHz~25GHz

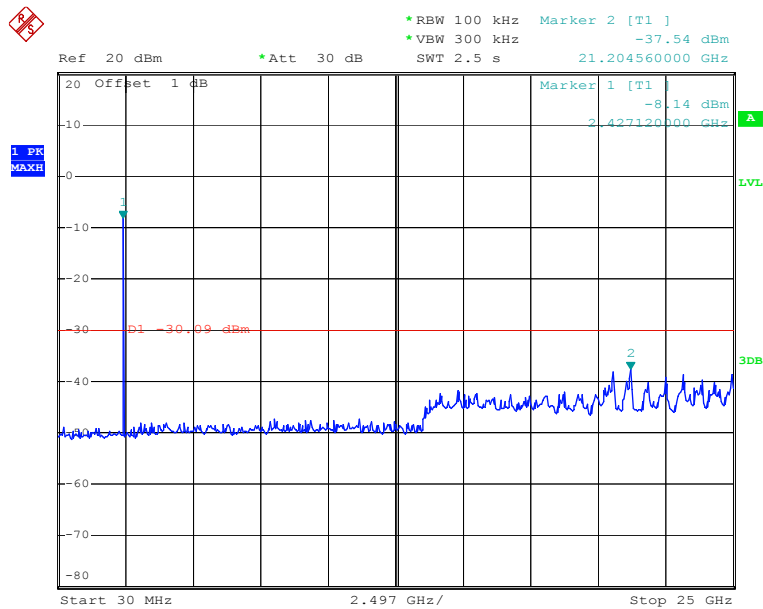

Note:Sweep points=250000pts




### 802.11g High channel 2462 MHz 30MHz~25GHz

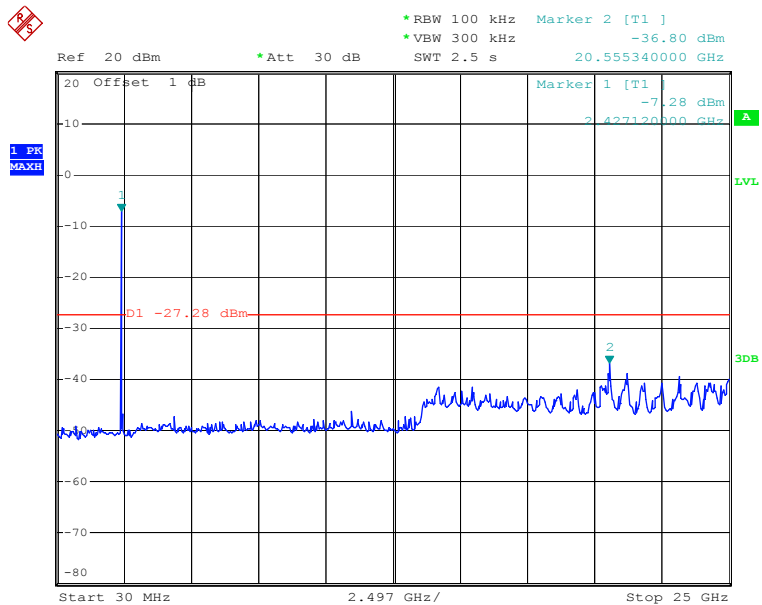


Note:Sweep points=250000pts

### 802.11n20 Low Channel 2412 MHz 30MHz~25GHz

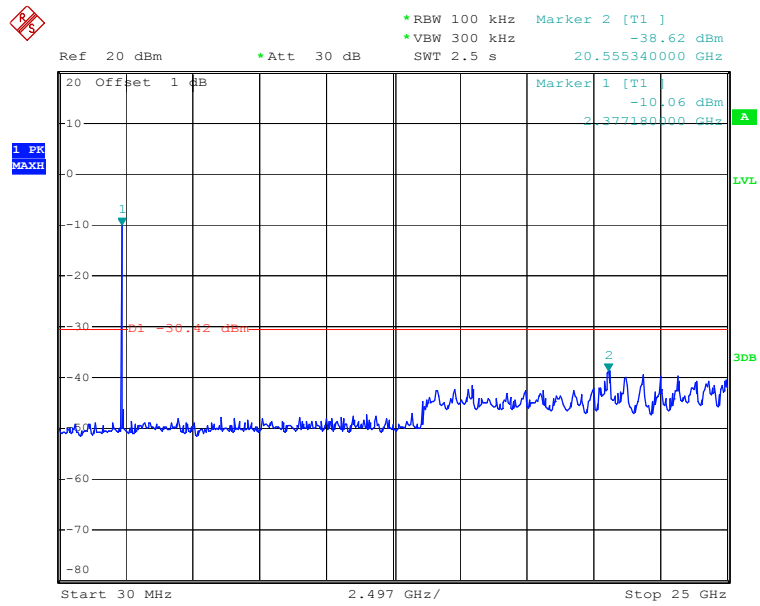


Note:Sweep points=250000pts

### 802.11n20 Middle Channel 2437 MHz 30MHz~25GHz

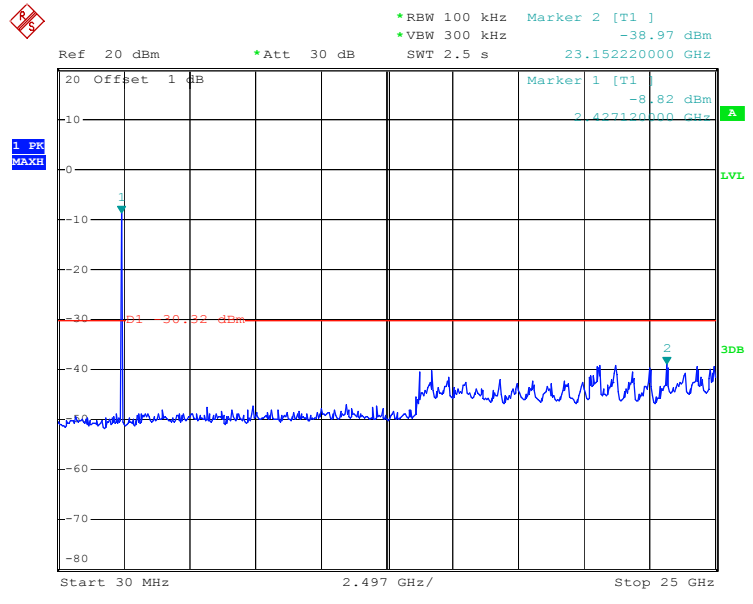

Note:Sweep points=250000pts

### 802.11n20 High channel 2462 MHz 30MHz~25GHz

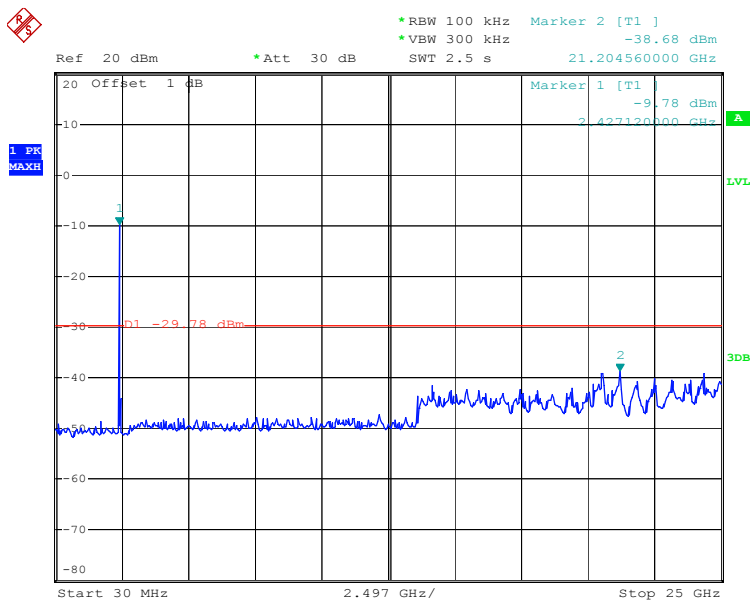

Note:Sweep points=250000pts

## 8. §15.247(A) (2) – 6DB BANDWIDTH TESTING

### 8.1. Test Equipment

Please refer to Section 5 this report.

### 8.2. Test Procedure

1. Set EUT in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. 802.11b/ g/n mode :Set the spectrum analyzer as  
RBW=100KHz,VBW>=3RBW,Span=40MHz,Sweep=5ms.
4. Mark the peak frequency and -6dB(upper and lower)frequency.
5. Repeat until all the rest channels are investigated.

### 8.3. Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


### 8.4. Test Result:Pass.

Please refer to the following tables


Channel	Channel Frequency (MHz)	Data Rate (Mbps)	6dB Emission Bandwidth (MHz)	FCC Part 15.247 Limit (kHz)
802.11b mode				
Low	2412	1	10.08	>500
Middle	2437	1	10.08	>500
High	2462	1	9.68	>500
802.11g mode				
Low	2412	6	16.48	>500
Middle	2437	6	16.24	>500
High	2462	6	16.48	>500
802.11n20 mode				
Low	2412	6.5	17.52	>500
Middle	2437	6.5	17.52	>500
High	2462	6.5	17.68	>500

### 802.11b Mode:


### Low Channel 6dB Bandwidth

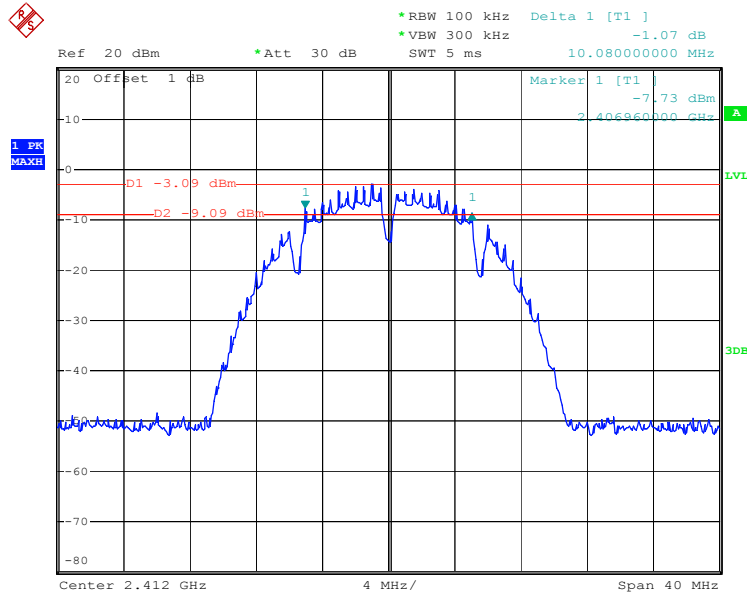

### Middle Channel 6dB Bandwidth

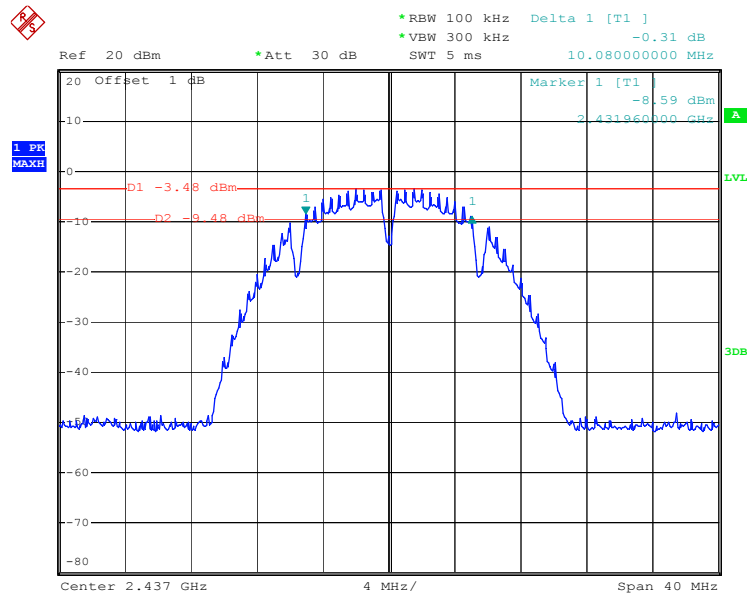


### High Channel 6dB Bandwidth

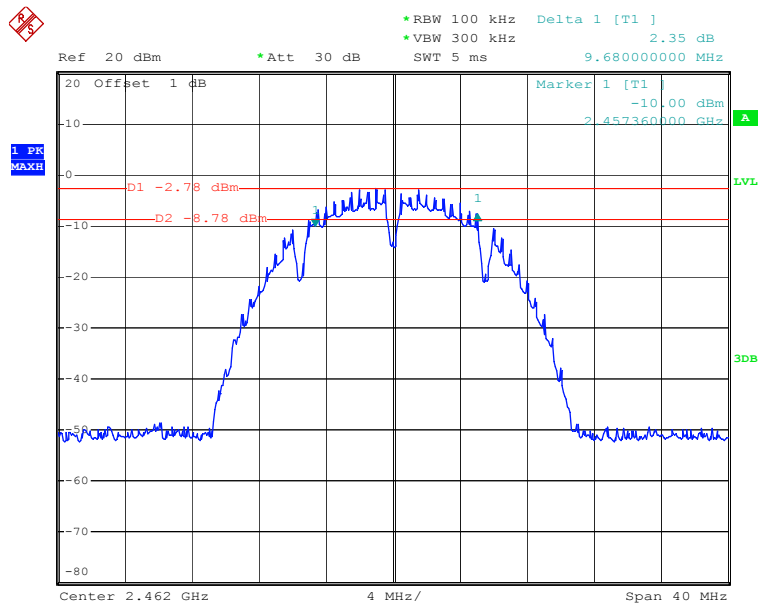


### 802.11g Mode:


### Low Channel 6dB Bandwidth

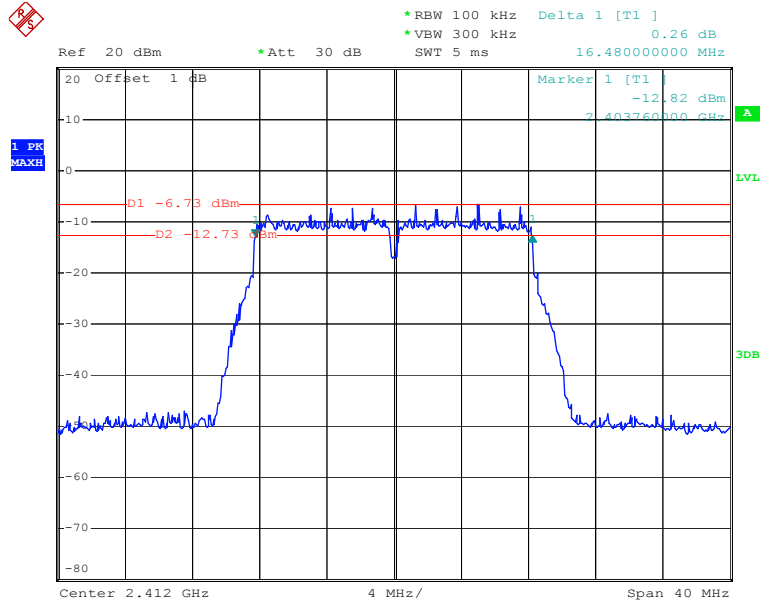

### Middle Channel 6dB Bandwidth

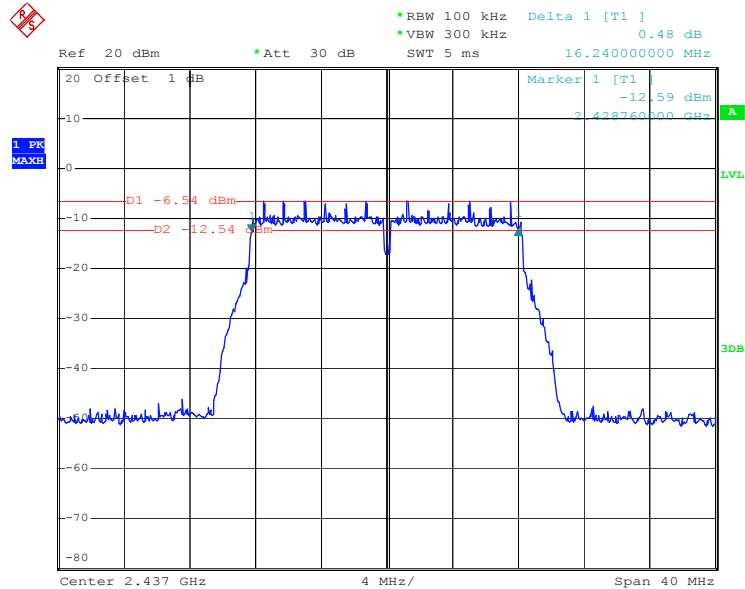


### High Channel 6dB Bandwidth

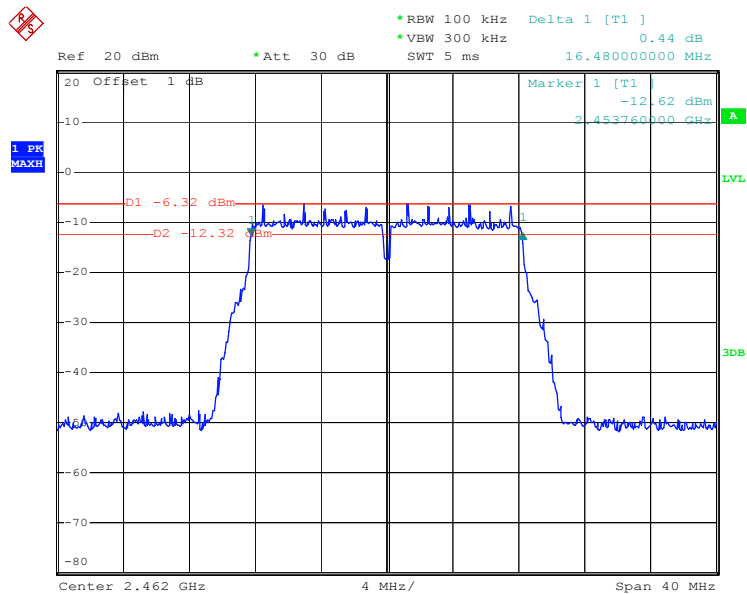




### 802.11n20 Mode:


### Low Channel 6dB Bandwidth

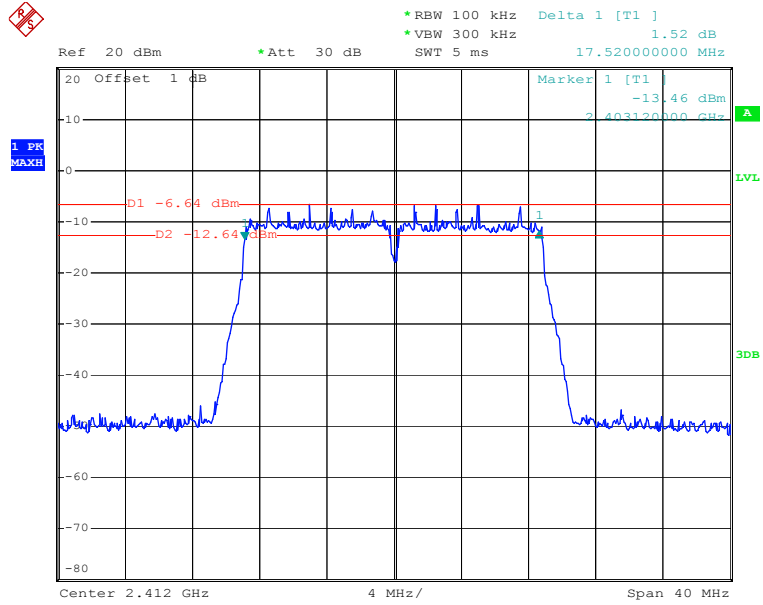

### Middle Channel 6dB Bandwidth

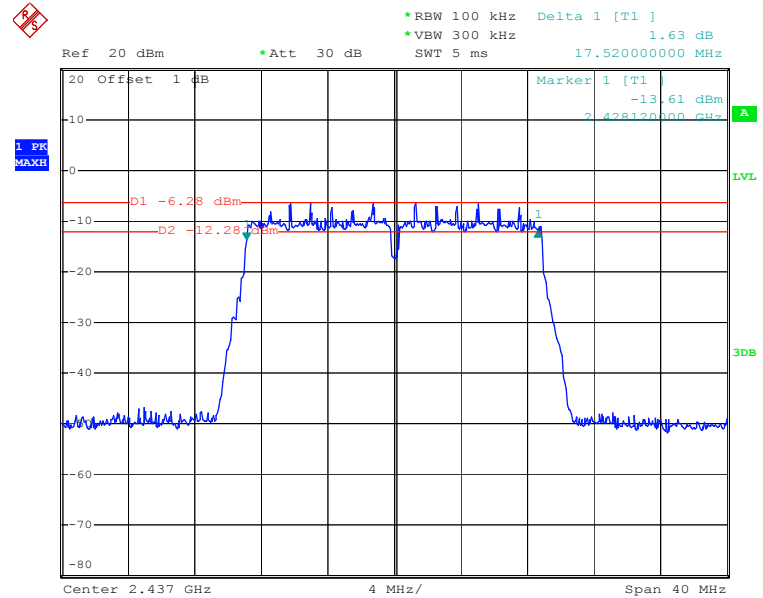

### High Channel 6dB Bandwidth

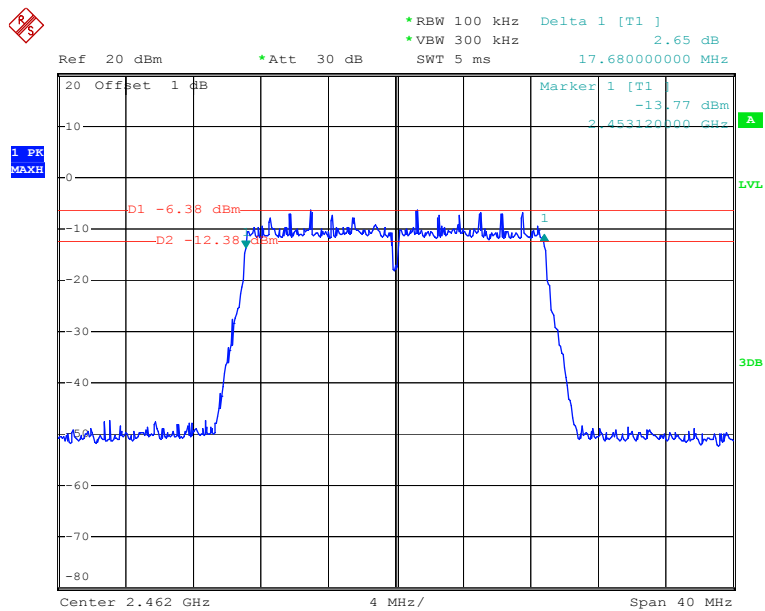

## **9. §15.247(B) (3) - Maximum Output Power**

### **9.1. Test Equipment**

Please refer to Section 4 this report.

### **9.2. Test Procedure**

1. The EUT was directly connected to the PK power meter

### **9.3. Applicable Standard**

According to §15.247(b) (3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

## 9.4. Test Result

**Pass**

Channel	Frequency (MHz)	Data Rate (Mbps)	Reading PK Power (dBm)	Reading AV Power (dBm)	Limit (dBm)	Result
802.11b mode						
Low	2412	1	11.42	9.20	30	Pass
Middle	2437	1	11.53	9.31	30	Pass
High	2462	1	11.71	9.49	30	Pass
802.11g mode						
Low	2412	6	14.25	9.03	30	Pass
Middle	2437	6	14.43	9.21	30	Pass
High	2462	6	14.54	9.32	30	Pass
802.11n20 mode						
Low	2412	6.5	14.23	9.01	30	Pass
Middle	2437	6.5	14.38	9.16	30	Pass
High	2462	6.5	14.35	9.13	30	Pass

## **10. §15.247(D) – 100 KHZ Bandwidth of Frequency Band Edge**

### **10.1. Test Equipment**

Please refer to Section 4 this report.

### **10.2. Test Procedure**

- 1, Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2, Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3, Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.  
Note: For Rdstricted Band  
RBW=1MHz  
VBW=1 MHz
- 4, Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5, Repeat above procedures until all measured frequencies were complete.

### **10.3. Applicable Standard**


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **10.4. Test Result**


Pass

Please refer to following plots.


### 802.11b: Band Edge, Left Side Low Channel

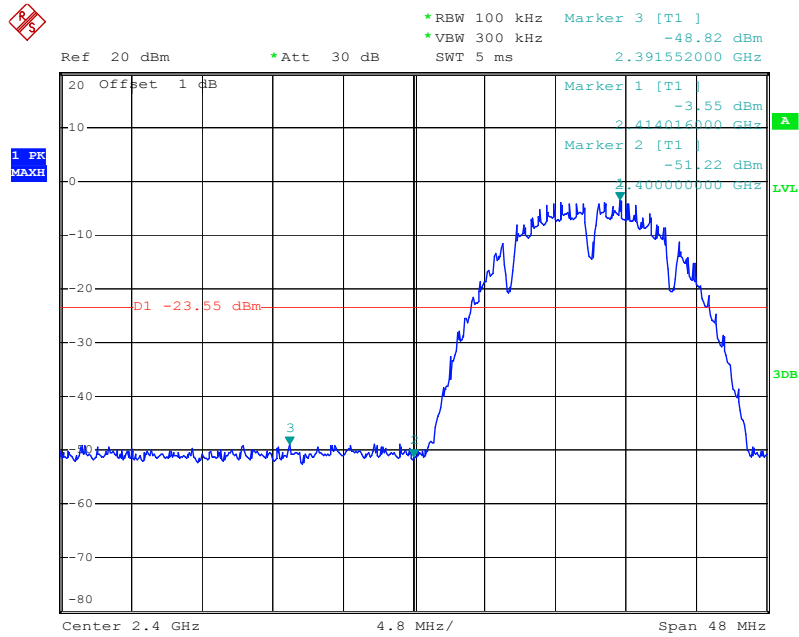


### 802.11b: Band Edge, Right Side High Channel

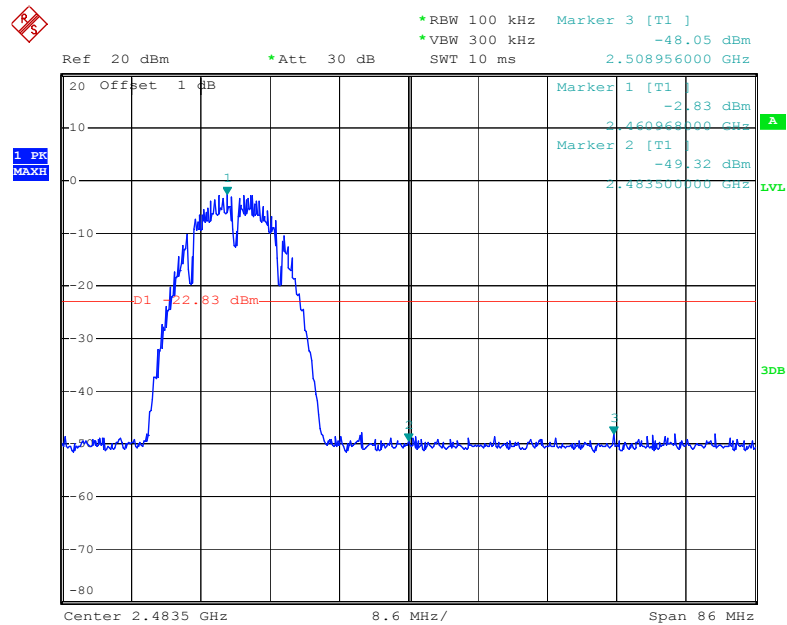


### 802.11g: Band Edge, Left Side Low Channel

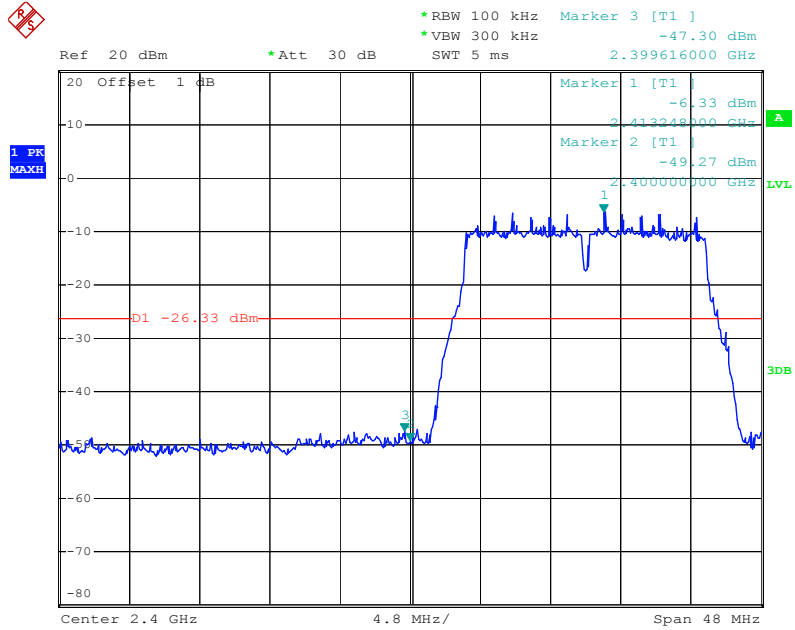


### 802.11g: Band Edge, Right Side High Channel

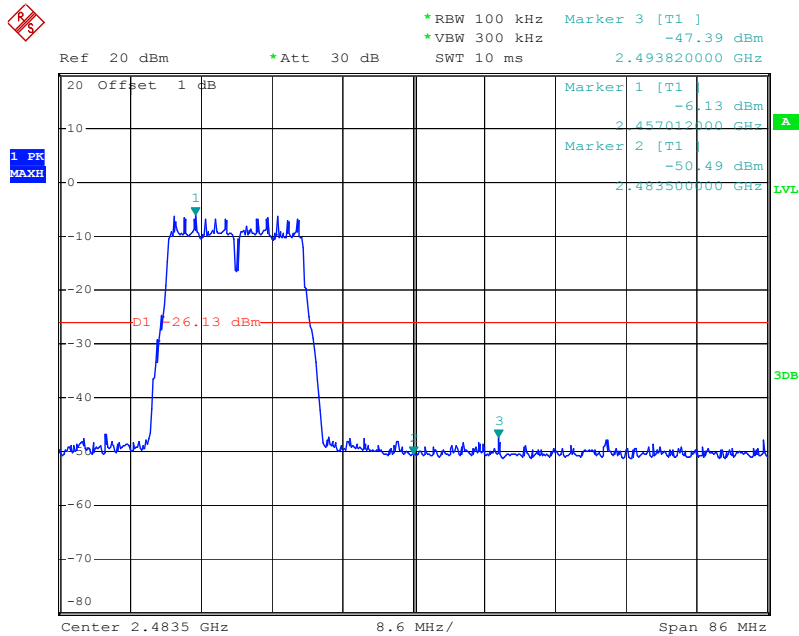

### 802.11n20: Band Edge, Left Side Low Channel

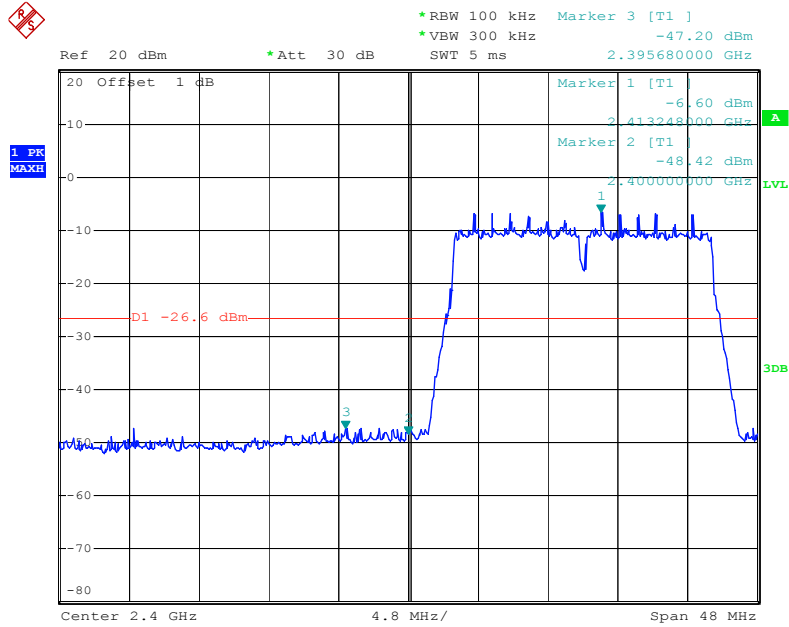

### 802.11n20: Band Edge, Right Side High Channel

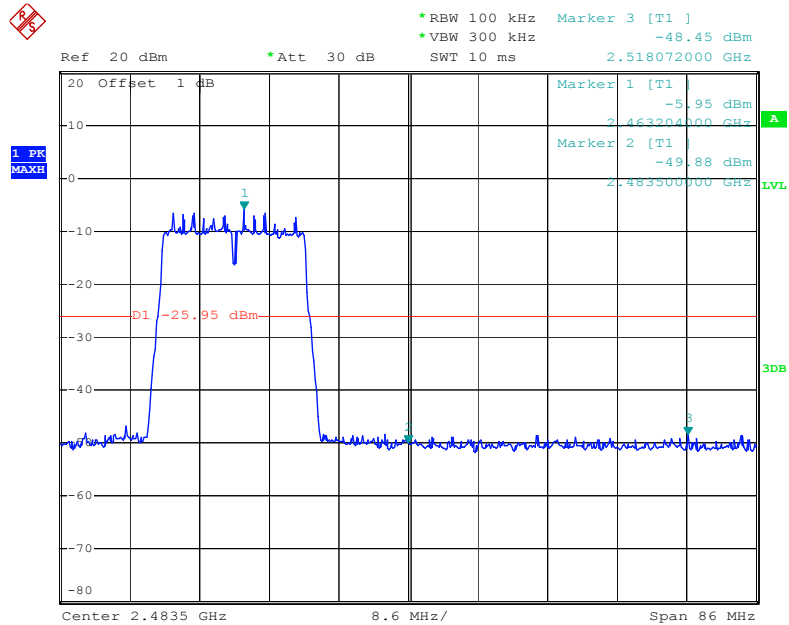



## 11. §15.247(E) - Power Spectral Density

### 11.1. Test Equipment

Please refer to Section 4 this report.

### 11.2. Test Procedure

1. Connect EUT test port to spectrum analyzer
2. Set the EUT to transmit maximum output power at 2.4GHz.
3. Then set the EUT to transmit at high, middle and low frequency and measure the conducted Power Spectral Density.

### 11.3. Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


### 11.4. Test Result

*PASS*


Channel	Frequency (MHz)	Data Rate (Mbps)	Correct Power spectral density (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11b mode					
Low	2412	1	-16.08	≤8	Pass
Middle	2437	1	-17.14	≤8	Pass
High	2462	1	-17.43	≤8	Pass
802.11g mode					
Low	2412	6	-20.42	≤8	Pass
Middle	2437	6	-20.60	≤8	Pass
High	2462	6	-21.14	≤8	Pass
802.11n20 mode					
Low	2412	6.5	-19.85	≤8	Pass
Middle	2437	6.5	-20.51	≤8	Pass
High	2462	6.5	-21.26	≤8	Pass

Please refer to the following plots


### Power Spectral Density, 802.11b Low Channel

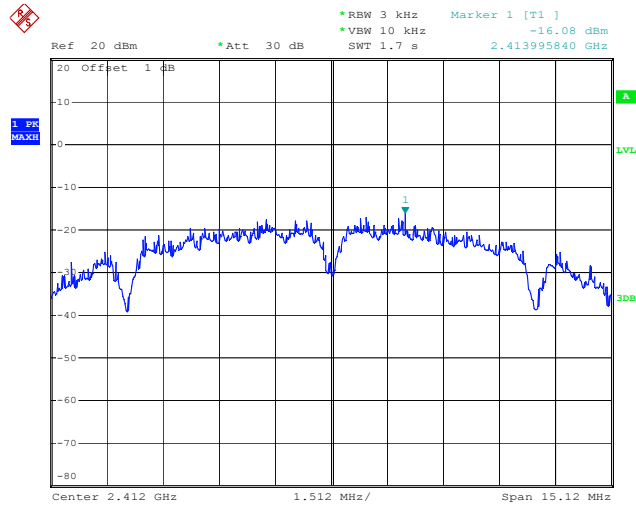


### Power Spectral Density, 802.11b Middle Channel

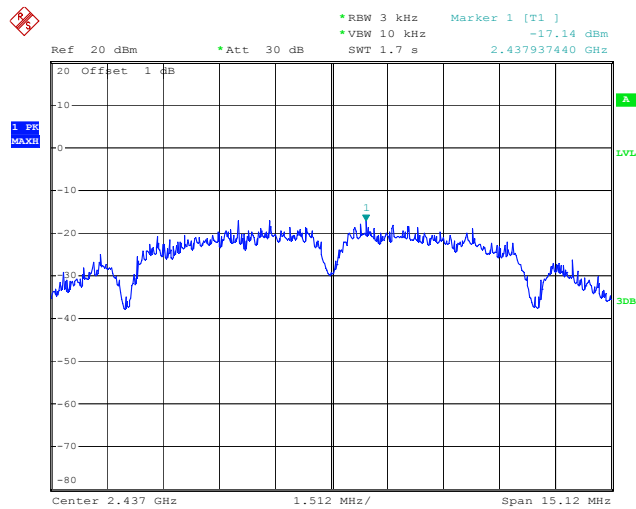


### Power Spectral Density, 802.11b High Channel

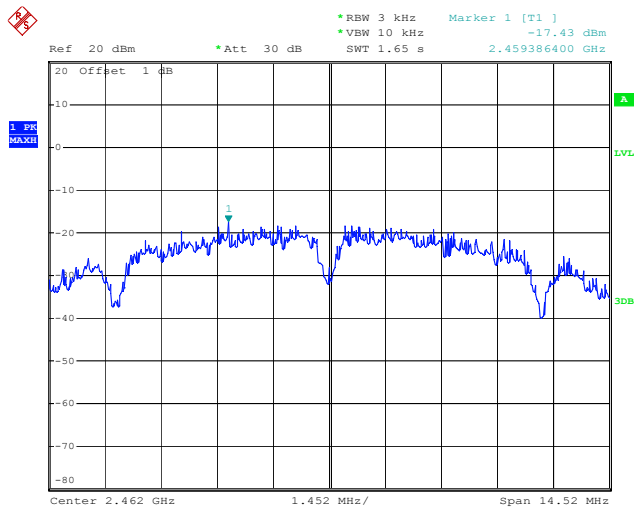


### Power Spectral Density, 802.11g Low Channel

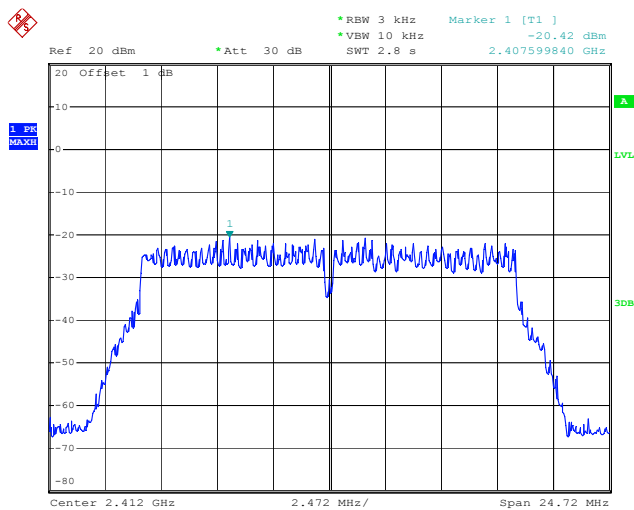


### Power Spectral Density, 802.11g Middle Channel

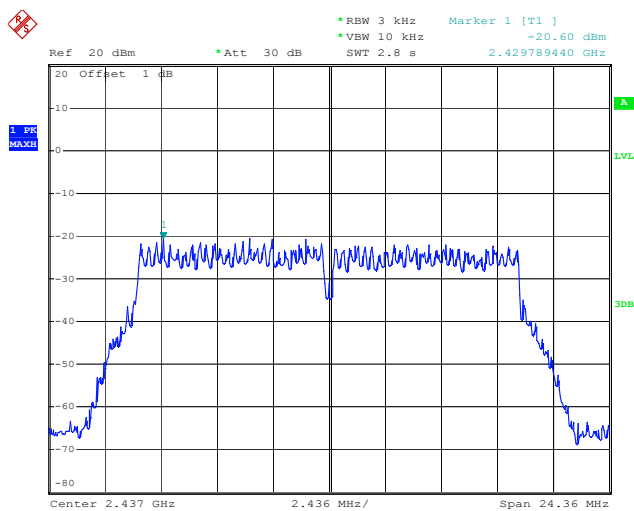


### Power Spectral Density, 802.11g High Channel

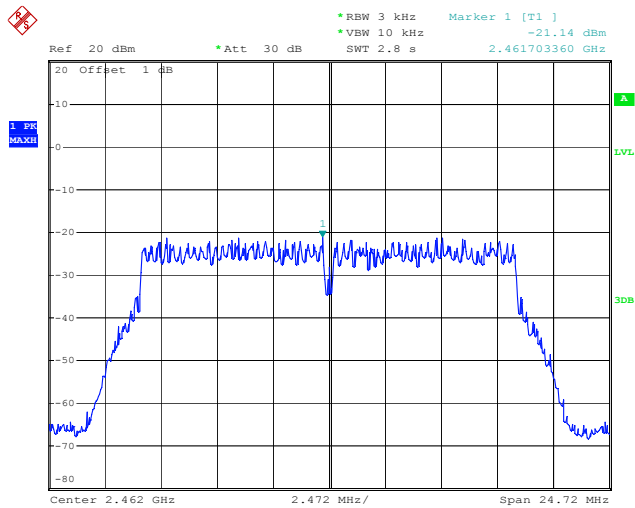

### Power Spectral Density, 802.11n20 Low Channel

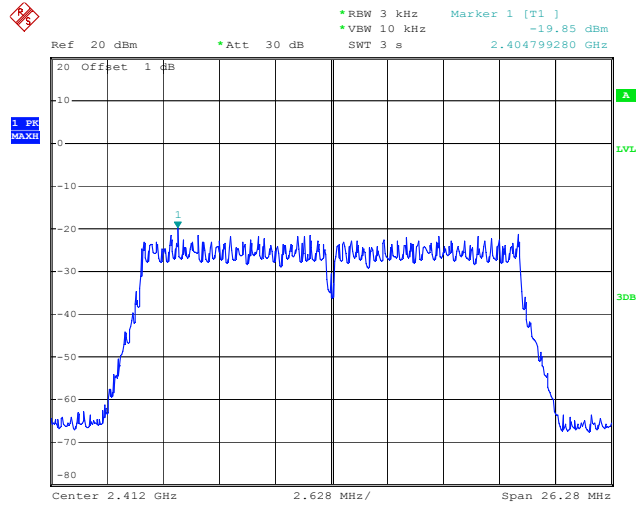

### Power Spectral Density, 802.11 n20 Middle Channel

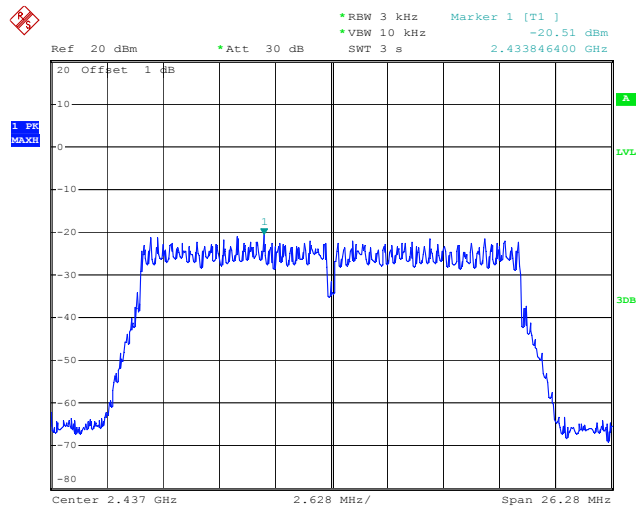

### Power Spectral Density, 802.11 n20 High Channel

