



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247

TEST REPORT

For

Jovision Technology Co.,Ltd.

Floor11, Building D, In-hi Tech Square, No.2008 Xinluo Street, Jinan, China

FCC ID: 2AEW9JVS-HV311E

Report Type: Original Report	Product Type: HD Network Camera
Test Engineer: Mark Yu	Mark Yu
Report Number: RSHA180510002-00B	
Report Date: 2018-06-04	
Reviewed By: Oscar Ye RF Leader	Oscar Ye
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	9
EXTERNAL I/O CABLE.....	9
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS	13
TEST EQUIPMENT LIST	14
FCC §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	15
APPLICABLE STANDARD	15
CALCULATED FORMULARY:.....	15
CALCULATED DATA:.....	15
FCC §15.203 - ANTENNA REQUIREMENT.....	16
APPLICABLE STANDARD	16
ANTENNA CONNECTOR CONSTRUCTION	16
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	17
APPLICABLE STANDARD	17
EUT SETUP.....	17
EMI TEST RECEIVER SETUP.....	17
TEST PROCEDURE	18
CORRECTED FACTOR & MARGIN CALCULATION	18
TEST RESULTS SUMMARY	18
TEST DATA	18
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	21
APPLICABLE STANDARD	21
EUT SETUP	21
EMI TEST RECEIVER SETUP.....	22
TEST PROCEDURE	22
CORRECTED AMPLITUDE & MARGIN CALCULATION	22
TEST RESULTS SUMMARY	22
TEST DATA	23
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST DATA	47
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	55

APPLICABLE STANDARD	55
TEST PROCEDURE	55
TEST DATA	55
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	57
APPLICABLE STANDARD	57
TEST PROCEDURE	57
TEST DATA	57
FCC §15.247(e) - POWER SPECTRAL DENSITY	62
APPLICABLE STANDARD	62
TEST PROCEDURE	62
TEST DATA	62

FINAL

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Jovision Technology Co.,Ltd.
Tested Model	JVS-HV311E
Series Model	JVS-HV311, JVS-HV311C, JVS-HF311E, JVS-HE311E, JVS-HN311E, JVS-HT311E, JVS-HD311C, V3H, HV311E, HV311C, HF311E, HE311E, HN311E, HT311E, HD311C, SFV001, SFV002
Model Difference	Model Names
Product Type	HD Network Camera
Dimension	83.7 mm(L)*83.7 mm(W)*118.4mm(H)
Power Supply	DC 5.0V from adapter

Adapter Information:

Model: SUN-0500200

Input: AC100-240 V 50/60Hz 0.3A Max.

Output: 5.0V, 2.0A

**All measurement and test data in this report was gathered from production sample serial number: 20180510002.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2018-05-10)*

Objective

This report is prepared on behalf of Jovision Technology Co.,Ltd. in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB558074 D01 DTS Meas Guidance v04.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Test channel list is as below:

For 802.11b, 802.11g and 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11;

For 802.11n-HT40 mode, EUT was tested with Channel 3, 6 and 9.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software


RF test tool: SecureCRT

Pre-scan with all the data rates, and the worst case was performed as below:


Mode	Data Rate	Power Level
802.11b	1 Mbps	L: 53; M: 48; H:50
802.11g	6 Mbps	L: 48; M: 48; H:43
802.11n-HT20	MCS0	L: 47; M: 45; H:43
802.11n-HT40	MCS0	L: 46; M: 46; H:44



Duty Cycle:

802.11b Mode Middle Channel

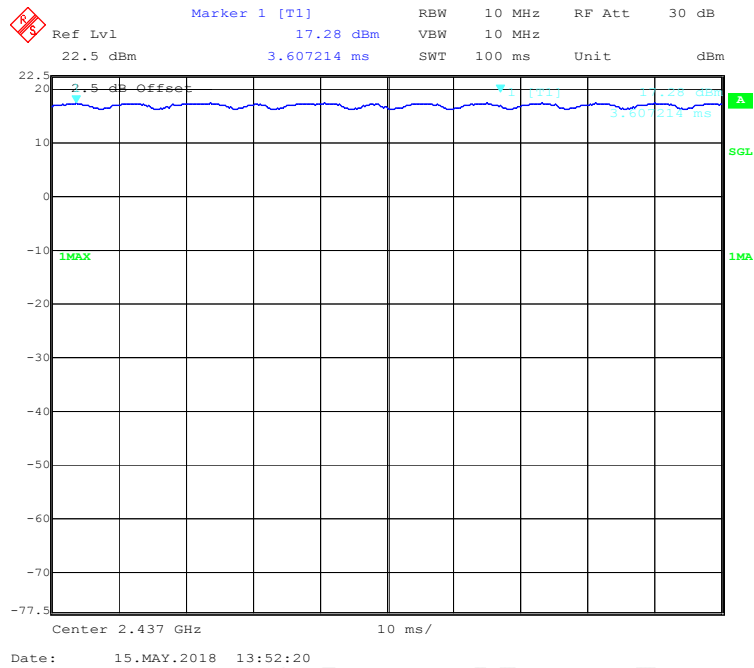

802.11g Mode Middle Channel

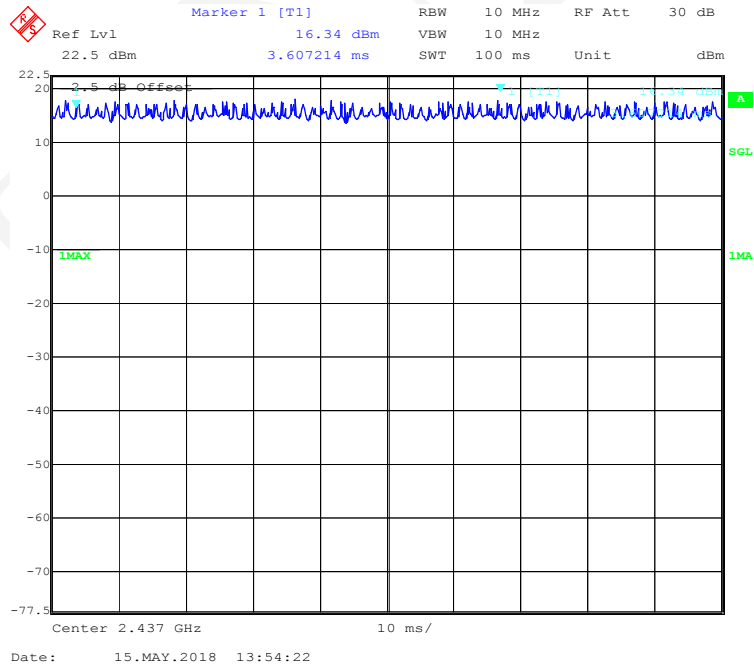

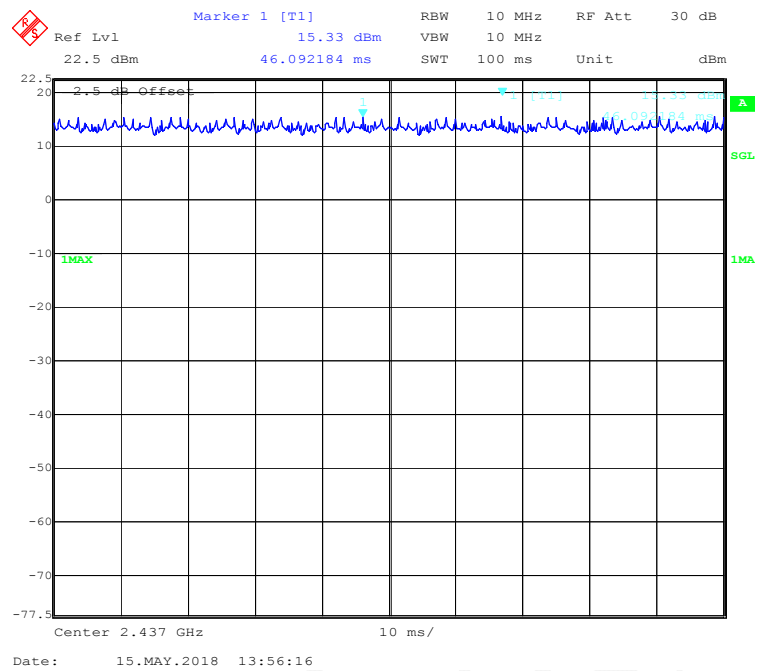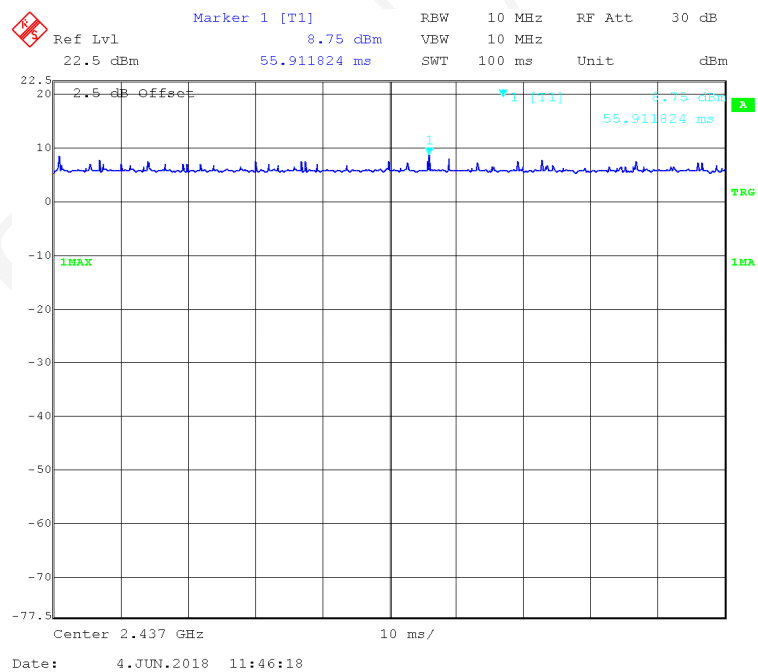802.11n-HT20 Mode Middle Channel**802.11n-HT40 Mode Middle Channel**

Mode	Duty Cycle (%)	T(us)	1/T(kHz)	10log(1/x)
802.11b	100	/	/	0
802.11g	100	/	/	0
802.11n-HT20	100	/	/	0
802.11n-HT40	100	/	/	0

Note: “x” means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
DELL	Adapter	LA65NS0-00	DF263
Jovision Technology	Debug Board	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Power Cable-1	0.8	EUT	Adapter (EUT)
Debug Board Cable	0.2	EUT	Debug Board
Power Cable-2	1.2	Notebook	Adapter (Notebook)

Block Diagram of Test Setup


For Conducted Emissions:

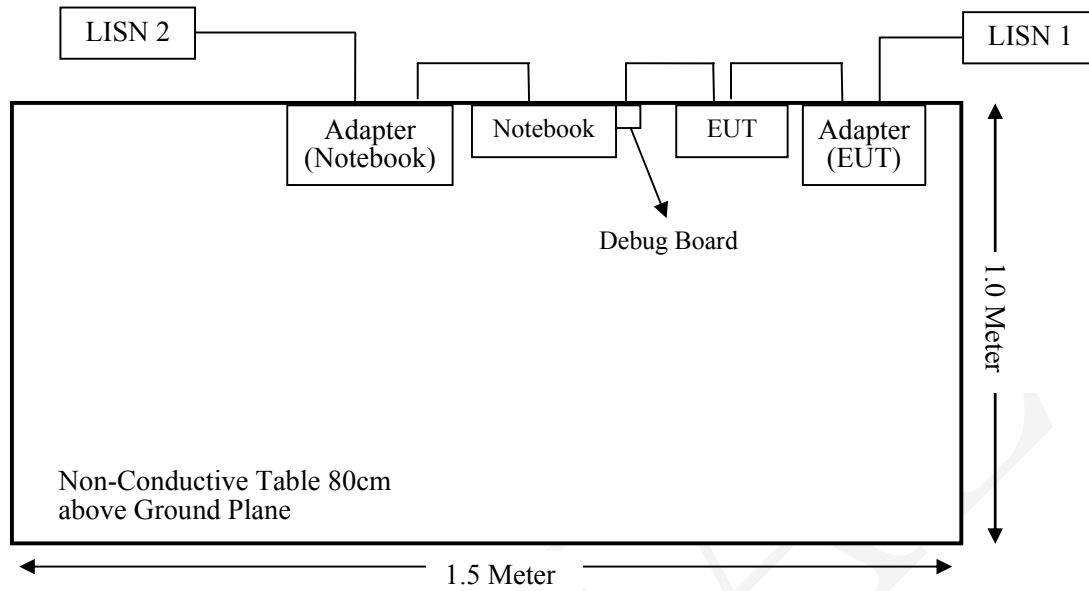

For Radiated Emissions(Below 1GHz):

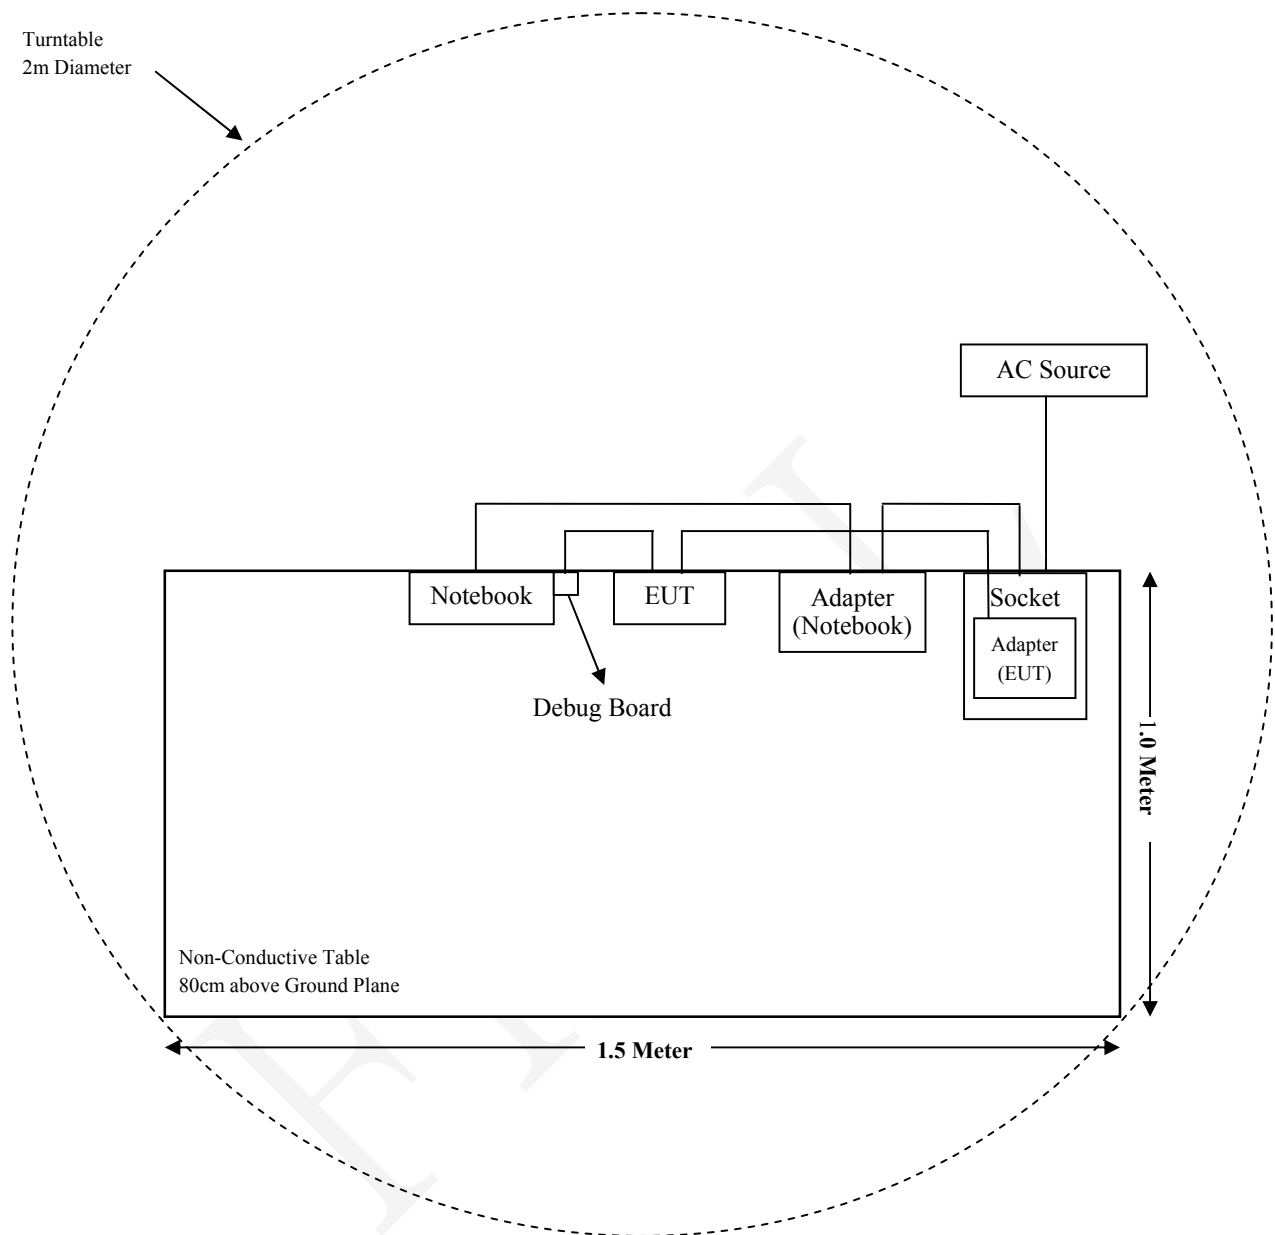

For Radiated Emissions(Above 1GHz):

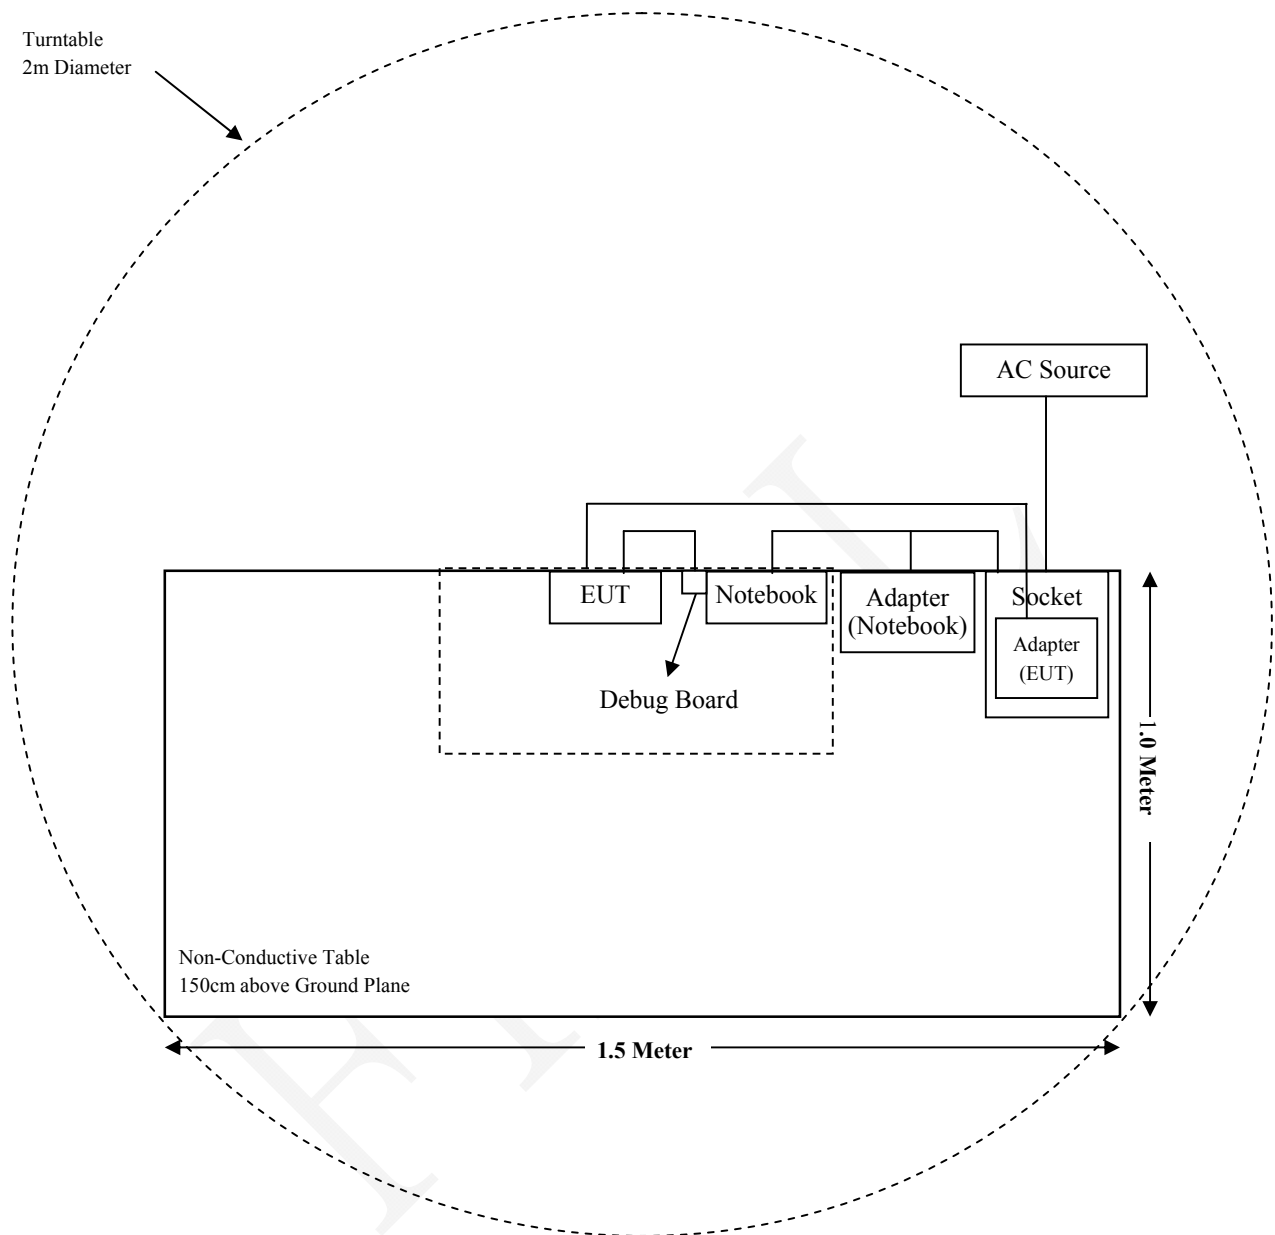

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2017-11-12	2018-11-11
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2017-08-15	2018-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2017-08-15	2018-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2017-08-27	2018-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Narda	Pre-amplifier	AFS42-00101800	2001270	2017-10-22	2018-10-21
QuinStar	Amplifier	QLW-18405536-J0	15964001009	2017-10-22	2018-10-21
MICRO-TRONICS	Notch Filter	BRM50702	/	2017-08-05	2018-08-04
Narda	Attenuator/10dB	10dB	/	2017-08-15	2018-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2017-08-15	2018-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2017-09-21	2018-09-20
Agilent	Power Meter	N1912A	MY5000492	2017-11-18	2018-11-17
Agilent	Power Sensor	N1921A	MY54210024	2017-11-18	2018-11-17
Narda	Attenuator/2dB	2dB	/	2017-08-15	2018-08-14
Jovision Technology	RF Cable	/	/	Each time	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2017-11-12	2018-11-11
Rohde & Schwarz	LISN 1	ENV216	3560655016	2017-11-15	2018-11-14
Rohde & Schwarz	LISN 2	ESH3-Z5	862770/011	2017-11-12	2018-11-11
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2017-08-15	2018-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4 \pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
		(dBi)	(numeric)	(dBm)	(mW)			
Wi-Fi	2412~2462	3.70	2.34	19.00	79.43	20	0.0370	1.0

Result: The device meet FCC MPE at 20 cm distance.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a FPC antenna for Wi-Fi, which the antenna gain is 3.7 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

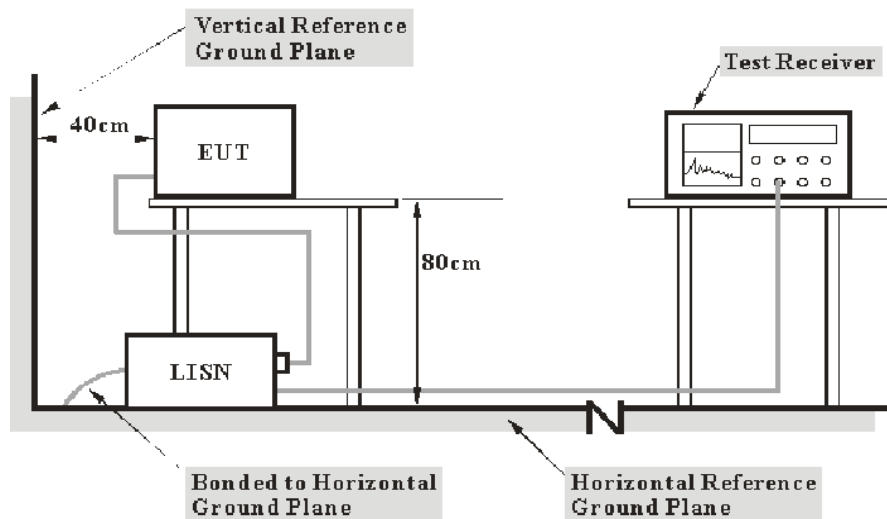

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Reading}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Mark Yu on 2018-05-16.


EUT operation mode: Transmitting in low channel of 802.11b mode (worst case)

AC 120V/60 Hz, Line

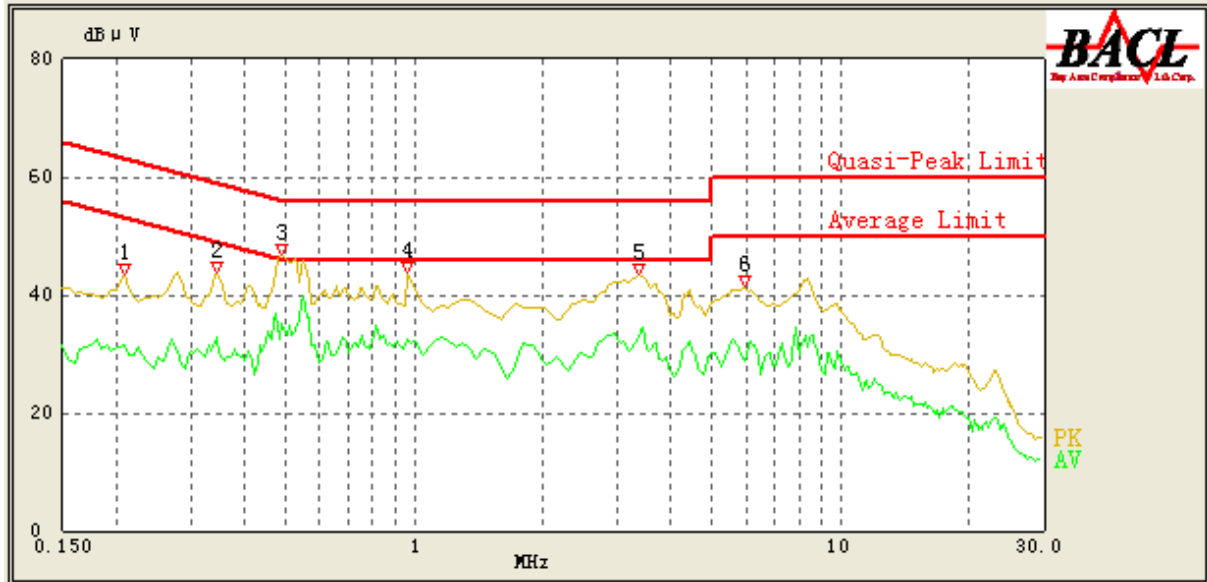

Frequency (MHz)	Reading (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.210	43.60	QP	9.000	L1	16.01	64.29	20.69	Compliant
0.210	31.59	AV	9.000	L1	16.01	54.29	22.70	Compliant
0.345	43.75	QP	9.000	L1	16.04	60.43	16.68	Compliant
0.345	32.78	AV	9.000	L1	16.04	50.43	17.65	Compliant
0.490	46.69	QP	9.000	L1	16.08	56.29	9.60	Compliant
0.490	35.16	AV	9.000	L1	16.08	46.29	11.13	Compliant
0.965	43.68	QP	9.000	L1	15.89	56.00	12.32	Compliant
0.960	32.57	AV	9.000	L1	15.89	46.00	13.43	Compliant
3.350	43.42	QP	9.000	L1	15.85	56.00	12.58	Compliant
3.350	32.92	AV	9.000	L1	15.85	46.00	13.08	Compliant
5.950	41.42	QP	9.000	L1	15.91	60.00	18.58	Compliant
5.950	28.81	AV	9.000	L1	15.91	50.00	21.19	Compliant

AC 120V/60 Hz, Neutral

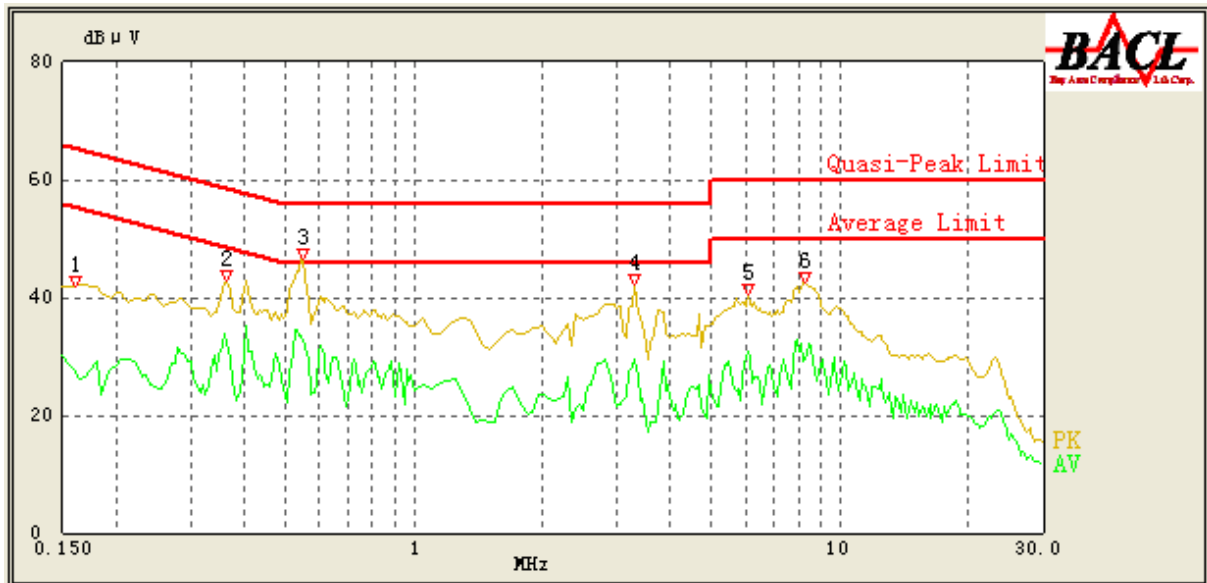



Frequency (MHz)	Reading (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.160	41.89	QP	9.000	N	16.06	65.71	23.82	Compliant
0.160	27.39	AV	9.000	N	16.06	55.71	28.32	Compliant
0.365	42.90	QP	9.000	N	16.08	59.86	16.96	Compliant
0.365	32.07	AV	9.000	N	16.08	49.86	17.79	Compliant
0.550	46.52	QP	9.000	N	16.08	56.00	9.48	Compliant
0.550	32.72	AV	9.000	N	16.08	46.00	13.28	Compliant
3.300	42.02	QP	9.000	N	15.89	56.00	13.98	Compliant
3.300	29.41	AV	9.000	N	15.89	46.00	16.59	Compliant
6.100	40.55	QP	9.000	N	15.90	60.00	19.45	Compliant
6.100	30.86	AV	9.000	N	15.90	50.00	19.14	Compliant
8.300	42.49	QP	9.000	N	15.95	60.00	17.51	Compliant
8.200	29.02	AV	9.000	N	15.95	50.00	20.98	Compliant

Note:

- 1) Corrected Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation
- 2) Margin = Limit – Reading

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

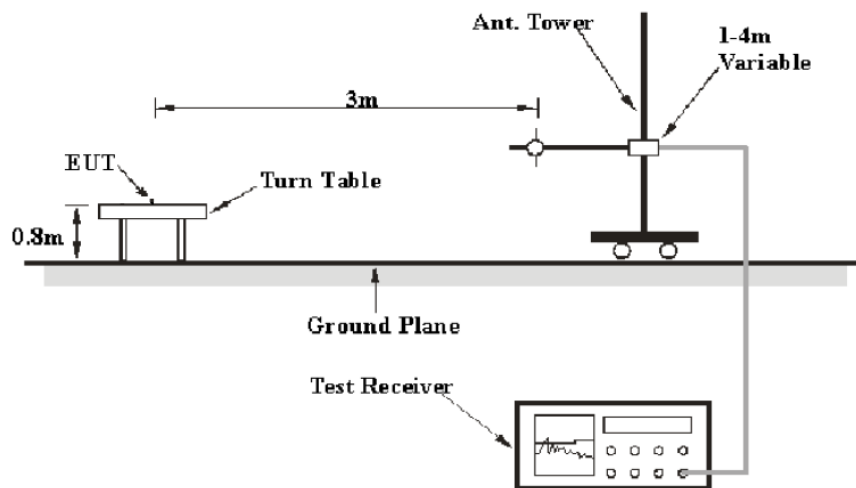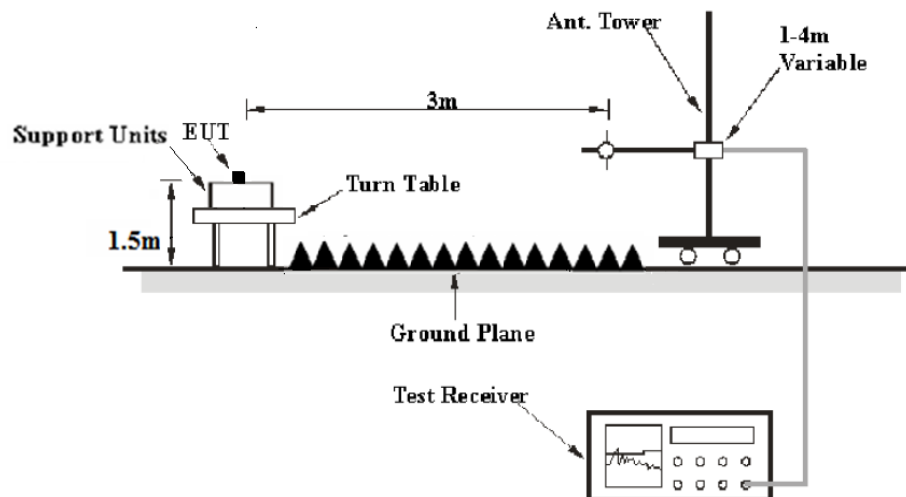EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave

Note: When duty cycle less than 98%, a correction factor shall be added to the average measurement results. Correction factor is $20 \cdot \log(1/x)$, where “x” is the duty cycle.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v04 sub-clause 12.1 and 12.2. and ANSI C63.10-2013 clause 6.5, 6.6 and 6.7.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection mode for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**


Temperature:	24.1 °C
Relative Humidity:	50 %
ATM Pressure:	101.2kPa

The testing was performed by Mark Yu on 2018-05-16 to 2018-05-22.

EUT operation mode: Transmitting

Spurious Emission Test:**30MHz-1GHz:**

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **low channel of 802.11b mode in X-axis of orientation** was recorded

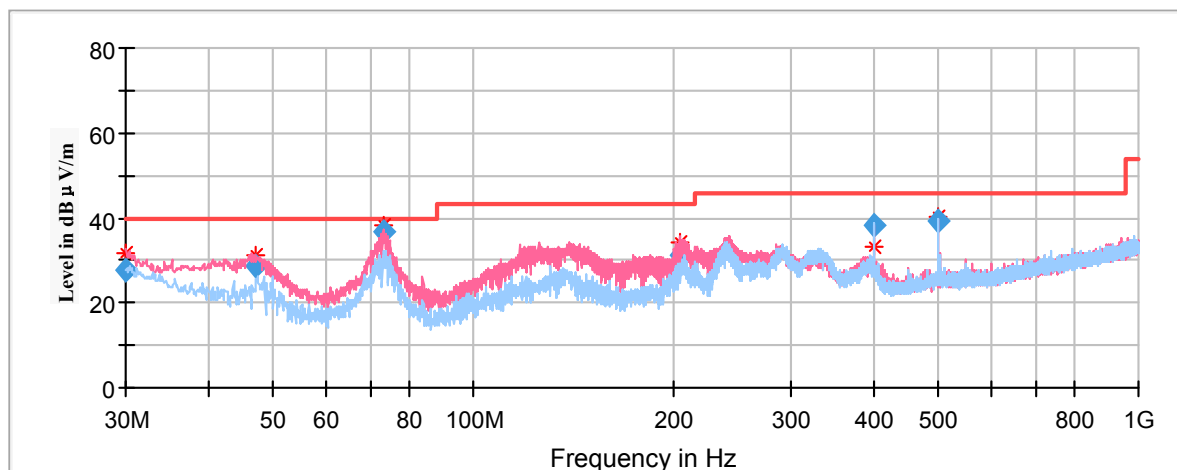

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	QuasiPeak (dBµV/m)	Height (cm)	Polar (H/V)				
30.021892	31.79	100.0	V	104.0	-4.6	40.00	8.21
46.908950	31.26	150.0	V	248.0	-15.8	40.00	8.74
73.094650	38.33	100.0	V	114.0	-17.8	40.00	2.67
204.083350	34.08	100.0	V	104.0	-12.8	43.50	9.42
399.996800	33.03	200.0	H	195.0	-8.6	46.00	12.97
500.024100	40.03	200.0	H	175.0	-6.1	46.00	5.97

1GHz-18GHz:**802.11b Mode:**


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:


1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 2412MHz

Full Spectrum

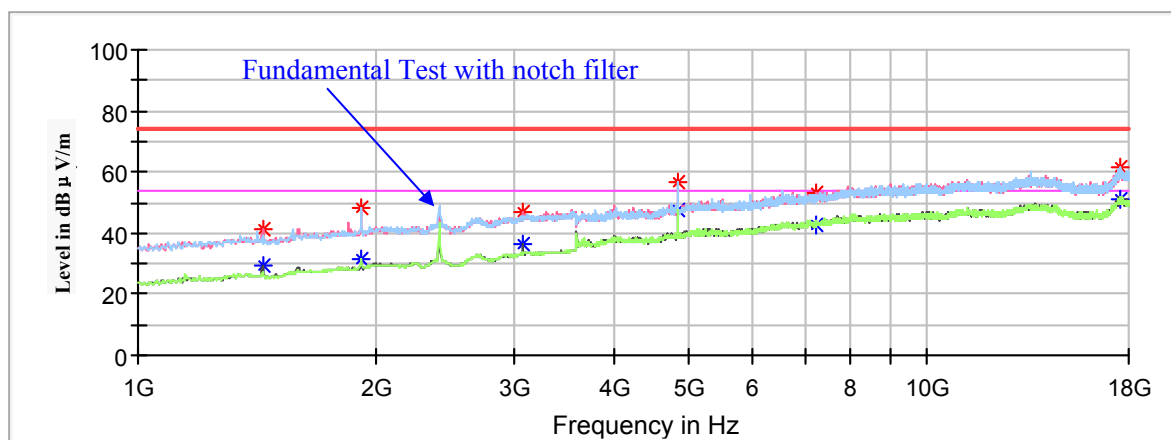


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1438.600000	---	29.04	200.0	V	239.0	-1.6	54.00	24.96
1438.600000	41.13	---	200.0	V	239.0	-1.6	74.00	32.87
1918.000000	---	31.81	250.0	H	121.0	1.5	54.00	22.19
1918.000000	48.16	---	250.0	H	121.0	1.5	74.00	25.84
3070.600000	---	36.40	250.0	V	191.0	6.2	54.00	17.60
3070.600000	47.08	---	250.0	V	191.0	6.2	74.00	26.92
4824.000000	---	47.46	100.0	V	156.0	10.8	54.00	6.54
4824.000000	56.83	---	100.0	V	156.0	10.8	74.00	17.17
7236.000000	---	42.47	150.0	V	346.0	15.3	54.00	11.53
7236.000000	52.84	---	150.0	V	346.0	15.3	74.00	21.16
17592.000000	---	51.39	200.0	V	298.0	23.0	54.00	2.61
17592.000000	61.23	---	200.0	H	298.0	23.0	74.00	12.77

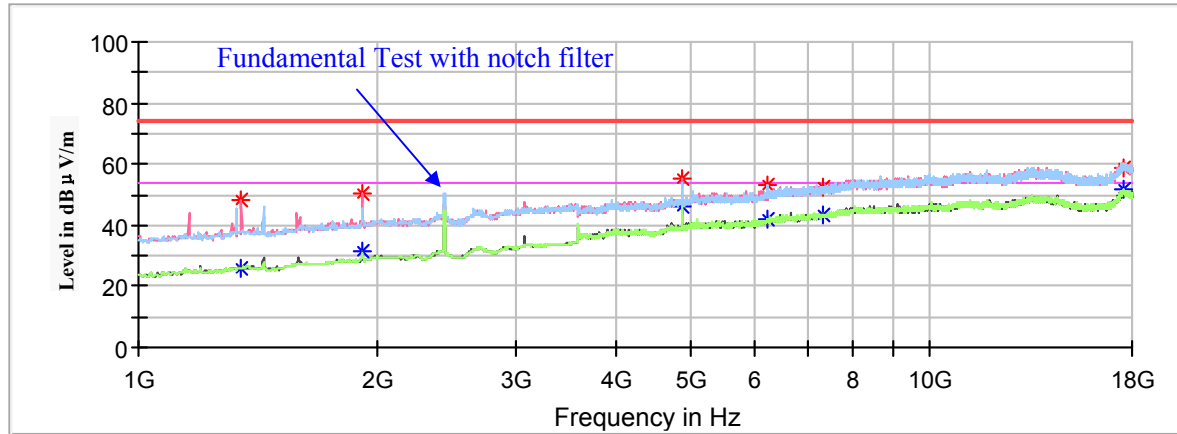Middle Channel: 2437MHz**Full Spectrum**

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1350.200000	---	25.91	250.0	V	217.0	-2.1	54.00	28.09
1350.200000	47.99	---	250.0	V	217.0	-2.1	74.00	26.01
1918.000000	---	31.72	150.0	V	22.0	1.5	54.00	22.28
1918.000000	50.50	---	150.0	V	22.0	1.5	74.00	23.50
4874.000000	---	46.37	200.0	V	29.0	11.1	54.00	7.63
4874.000000	55.27	---	200.0	V	29.0	11.1	74.00	18.73
6242.800000	---	41.80	150.0	H	64.0	13.6	54.00	12.20
6242.800000	52.86	---	150.0	H	64.0	13.6	74.00	21.14
7311.000000	---	43.12	250.0	V	314.0	15.4	54.00	10.88
7311.000000	52.58	---	250.0	H	314.0	15.4	74.00	21.42
17588.600000	58.71	---	200.0	H	108.0	23.0	74.00	15.29
17588.600000	---	51.56	200.0	H	108.0	23.0	54.00	2.44

High Channel: 2462MHz

Full Spectrum

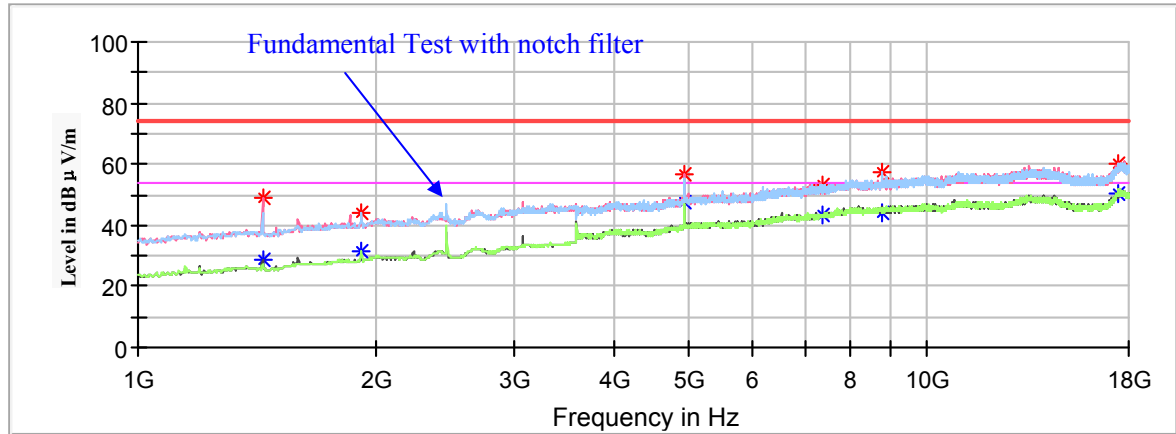

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1438.600000	48.65	---	100.0	V	234.0	-1.6	74.00	25.35
1438.600000	---	28.68	100.0	V	234.0	-1.6	54.00	25.32
1918.000000	---	31.36	200.0	H	106.0	1.5	54.00	22.64
1918.000000	43.80	---	200.0	H	106.0	1.5	74.00	30.20
4924.000000	56.35	---	150.0	V	14.0	11.3	74.00	17.65
4924.000000	---	47.58	150.0	V	14.0	11.3	54.00	6.42
7386.000000	53.18	---	250.0	V	47.0	15.5	74.00	20.82
7386.000000	---	43.17	250.0	V	47.0	15.5	54.00	10.83
8772.400000	---	44.40	150.0	V	27.0	17.4	54.00	9.60
8772.400000	57.19	---	150.0	V	27.0	17.4	74.00	16.81
17469.600000	---	50.27	200.0	H	216.0	22.9	54.00	3.73
17469.600000	60.31	---	200.0	H	216.0	22.9	74.00	13.69

802.11g Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:


1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 2412MHz

Full Spectrum

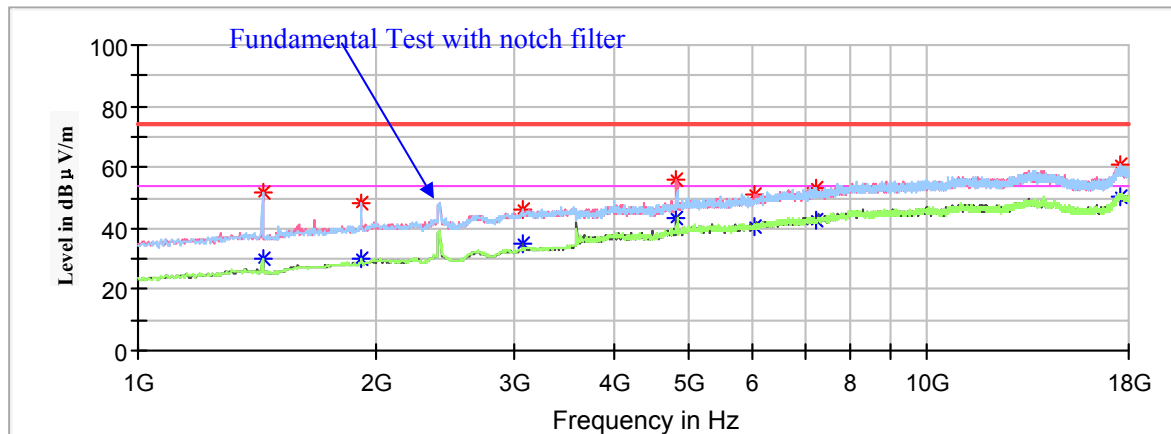


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1438.600000	---	30.39	100.0	H	180.0	-1.6	54.00	23.61
1438.600000	51.71	---	100.0	H	180.0	-1.6	74.00	22.29
1918.000000	---	30.30	200.0	V	196.0	1.5	54.00	23.70
1918.000000	48.38	---	200.0	V	196.0	1.5	74.00	25.62
3070.600000	---	34.64	150.0	V	120.0	6.2	54.00	19.36
3070.600000	46.00	---	150.0	V	120.0	6.2	74.00	28.00
4824.000000	---	43.48	200.0	V	169.0	10.8	54.00	10.52
4824.000000	55.73	---	200.0	V	169.0	10.8	74.00	18.27
6055.800000	---	40.43	150.0	V	100.0	13.1	54.00	13.57
6055.800000	51.24	---	150.0	V	100.0	13.1	74.00	22.76
7236.000000	---	42.45	150.0	H	115.0	15.3	54.00	11.55
7236.000000	53.02	---	150.0	H	115.0	15.3	74.00	20.98
17595.400000	---	50.17	200.0	H	218.0	23.0	54.00	3.83
17595.400000	60.74	---	200.0	H	218.0	23.0	74.00	13.26

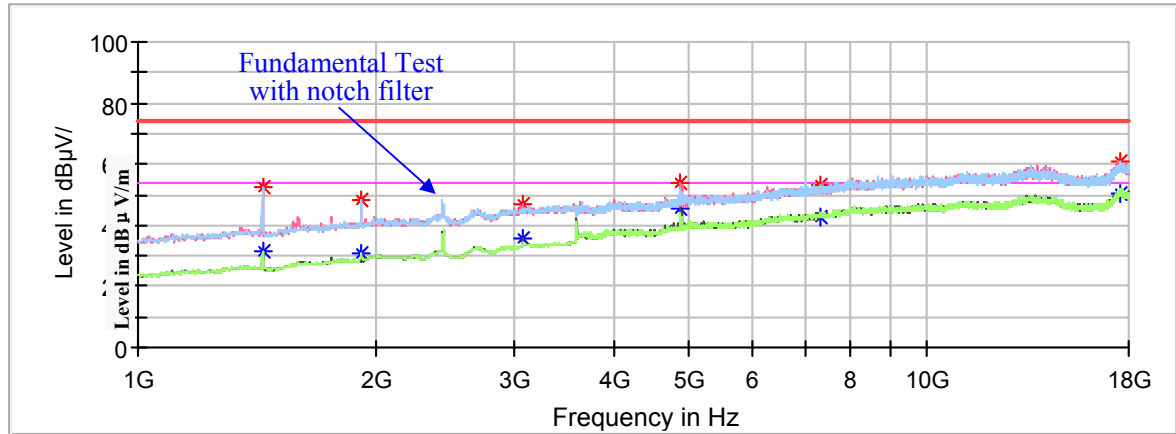Middle Channel: 2437MHz**Full Spectrum**

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1438.600000	---	31.24	150.0	H	150.0	-1.6	54.00	22.76
1438.600000	52.52	---	150.0	H	150.0	-1.6	74.00	21.48
1918.000000	---	30.65	200.0	H	276.0	1.5	54.00	23.35
1918.000000	48.01	---	200.0	H	276.0	1.5	74.00	25.99
3070.600000	---	35.52	200.0	V	106.0	6.2	54.00	18.48
3070.600000	47.14	---	200.0	V	106.0	6.2	74.00	26.86
4874.000000	---	45.21	150.0	V	296.0	11.1	54.00	8.79
4874.000000	53.94	---	150.0	V	296.0	11.1	74.00	20.06
7311.000000	---	42.91	100.0	V	245.0	15.4	54.00	11.09
7311.000000	53.48	---	100.0	V	245.0	15.4	74.00	20.52
17537.600000	---	50.35	200.0	H	62.0	23.1	54.00	3.65
17537.600000	60.70	---	200.0	H	62.0	23.1	74.00	13.30

High Channel: 2462MHz

Full Spectrum

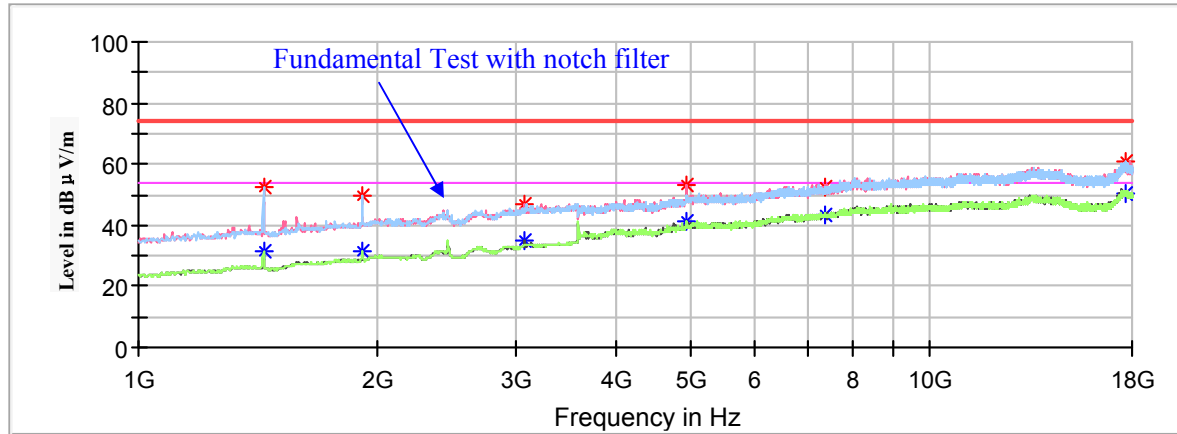

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1438.600000	---	31.45	200.0	H	144.0	-1.6	54.00	22.55
1438.600000	52.76	---	200.0	H	144.0	-1.6	74.00	21.24
1918.000000	---	31.24	100.0	H	309.0	1.5	54.00	22.76
1918.000000	49.84	---	100.0	H	309.0	1.5	74.00	24.16
3070.600000	---	35.31	200.0	V	116.0	6.2	54.00	18.69
3070.600000	46.59	---	200.0	V	116.0	6.2	74.00	27.41
4924.000000	---	41.22	150.0	V	107.0	11.3	54.00	12.78
4924.000000	53.15	---	150.0	V	107.0	11.3	74.00	20.85
7386.000000	---	43.10	200.0	V	319.0	15.5	54.00	10.90
7386.000000	52.24	---	200.0	V	319.0	15.5	74.00	21.76
17629.400000	---	50.59	200.0	H	334.0	23.0	54.00	3.41
17629.400000	60.56	---	200.0	H	334.0	23.0	74.00	13.44

802.11n-HT20 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:


1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 2412MHz


Full Spectrum

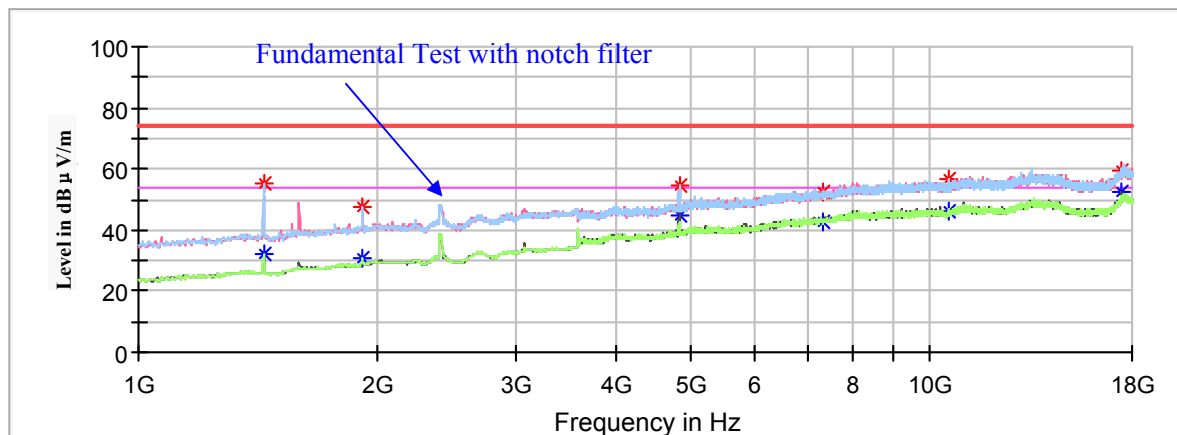

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1438.600000	55.12	---	150.0	H	326.0	-1.6	74.00	18.88
1438.600000	---	32.39	150.0	H	326.0	-1.6	54.00	21.61
1918.000000	47.69	---	200.0	H	276.0	1.5	74.00	26.31
1918.000000	---	30.76	200.0	H	276.0	1.5	54.00	23.24
4824.000000	54.37	---	200.0	V	232.0	10.8	74.00	19.63
4824.000000	---	44.57	200.0	V	232.0	10.8	54.00	9.43
7334.200000	52.69	---	150.0	V	353.0	15.4	74.00	21.31
7334.200000	---	42.72	150.0	V	353.0	15.4	54.00	11.28
10567.600000	56.33	---	200.0	V	117.0	18.2	74.00	17.67
10567.600000	---	46.26	200.0	V	117.0	18.2	54.00	7.74
17483.200000	59.15	---	100.0	V	27.0	23.0	74.00	14.85
17483.200000	---	52.45	100.0	V	27.0	23.0	54.00	1.55

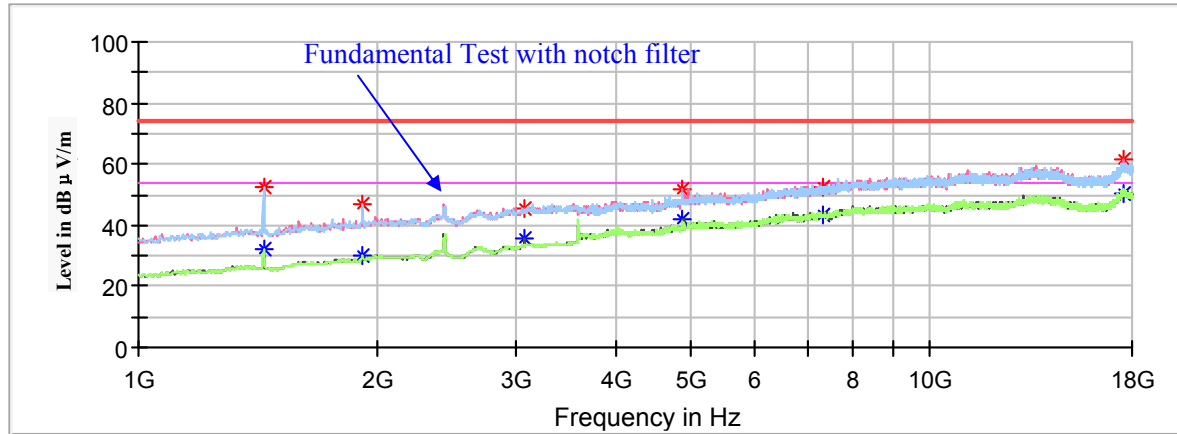Middle Channel: 2437MHz**Full Spectrum**

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1438.600000	---	31.99	150.0	H	326.0	-1.6	54.00	22.01
1438.600000	52.52	---	150.0	H	326.0	-1.6	74.00	21.48
1918.000000	---	30.11	150.0	H	212.0	1.5	54.00	23.89
1918.000000	46.97	---	150.0	H	212.0	1.5	74.00	27.03
3070.600000	---	35.41	200.0	V	106.0	6.2	54.00	18.59
3070.600000	45.71	---	200.0	V	106.0	6.2	74.00	28.29
4874.000000	---	42.16	150.0	V	149.0	11.0	54.00	11.84
4874.000000	51.78	---	150.0	V	149.0	11.0	74.00	22.22
7311.000000	---	43.04	200.0	V	185.0	15.4	54.00	10.96
7311.000000	52.66	---	200.0	V	185.0	15.4	74.00	21.34
17527.400000	---	50.63	150.0	V	217.0	23.1	54.00	3.37
17527.400000	61.42	---	150.0	V	217.0	23.1	74.00	12.58

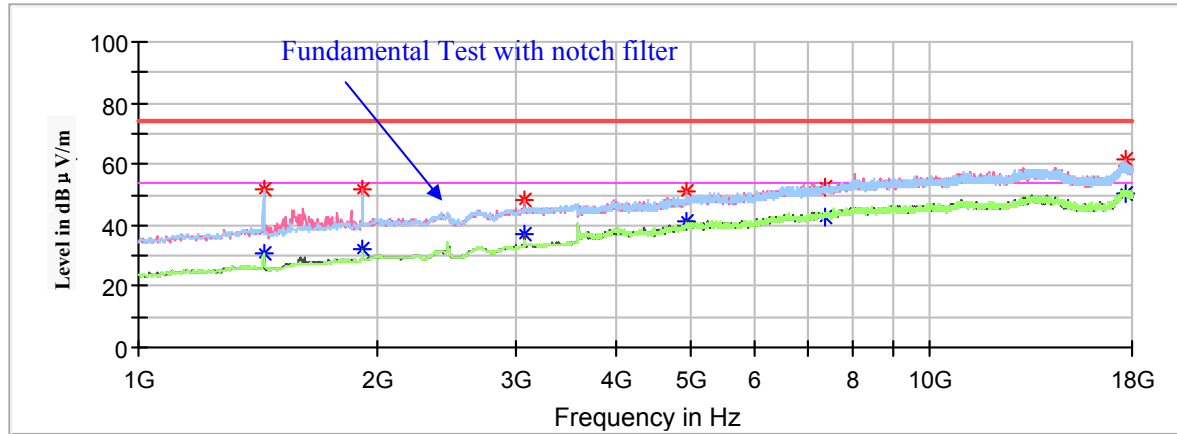High Channel: 2462MHz**Full Spectrum**

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1438.600000	---	30.83	200.0	H	292.0	-1.6	54.00	23.17
1438.600000	52.02	---	200.0	H	292.0	-1.6	74.00	21.98
1918.000000	---	32.33	200.0	V	234.0	1.5	54.00	21.67
1918.000000	51.90	---	200.0	V	234.0	1.5	74.00	22.10
3070.600000	---	37.36	150.0	V	174.0	6.2	54.00	16.64
3070.600000	48.09	---	150.0	V	174.0	6.2	74.00	25.91
4924.000000	---	41.11	200.0	V	234.0	11.3	54.00	12.89
4924.000000	50.86	---	200.0	V	234.0	11.3	74.00	23.14
7386.000000	---	42.46	150.0	V	106.0	15.5	54.00	11.54
7386.000000	52.44	---	150.0	V	106.0	15.5	74.00	21.56
17643.000000	61.33	---	200.0	V	27.0	22.9	74.00	12.67
17646.400000	---	50.46	200.0	V	27.0	22.9	54.00	3.54

802.11n-HT40 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:


1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 2422MHz

Full Spectrum

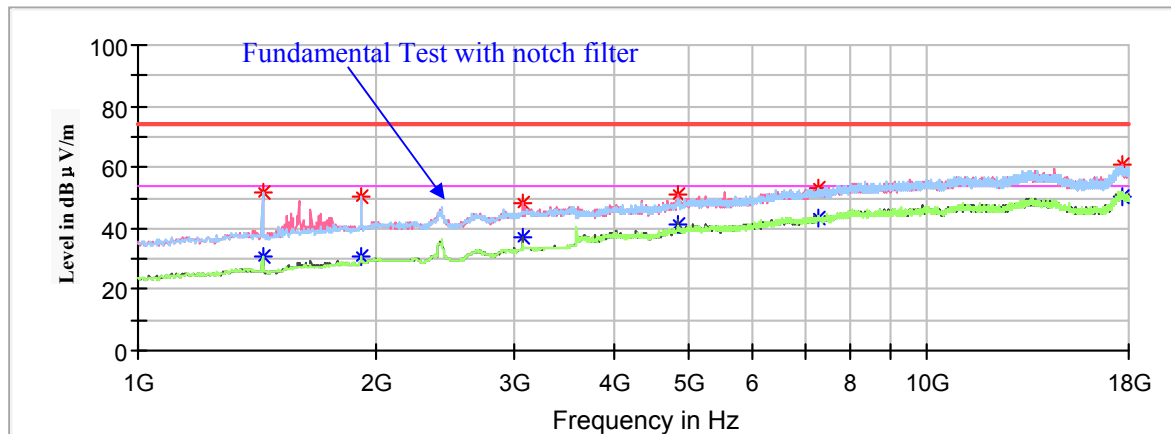


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1438.600000	---	30.62	200.0	H	338.0	-1.6	54.00	23.38
1438.600000	51.97	---	200.0	H	338.0	-1.6	74.00	22.03
1918.000000	---	30.99	100.0	H	313.0	1.5	54.00	23.01
1918.000000	50.47	---	100.0	H	313.0	1.5	74.00	23.53
3070.600000	---	37.34	150.0	V	159.0	6.2	54.00	16.66
3070.600000	47.96	---	150.0	V	159.0	6.2	74.00	26.04
4844.000000	---	40.98	100.0	V	138.0	10.9	54.00	13.02
4844.000000	51.30	---	100.0	V	138.0	10.9	74.00	22.70
7266.000000	---	43.63	200.0	V	201.0	15.3	54.00	10.37
7266.000000	53.31	---	200.0	V	201.0	15.3	74.00	20.69
17646.400000	---	50.17	100.0	V	43.0	22.9	54.00	3.83
17646.400000	61.13	---	100.0	V	43.0	22.9	74.00	12.87

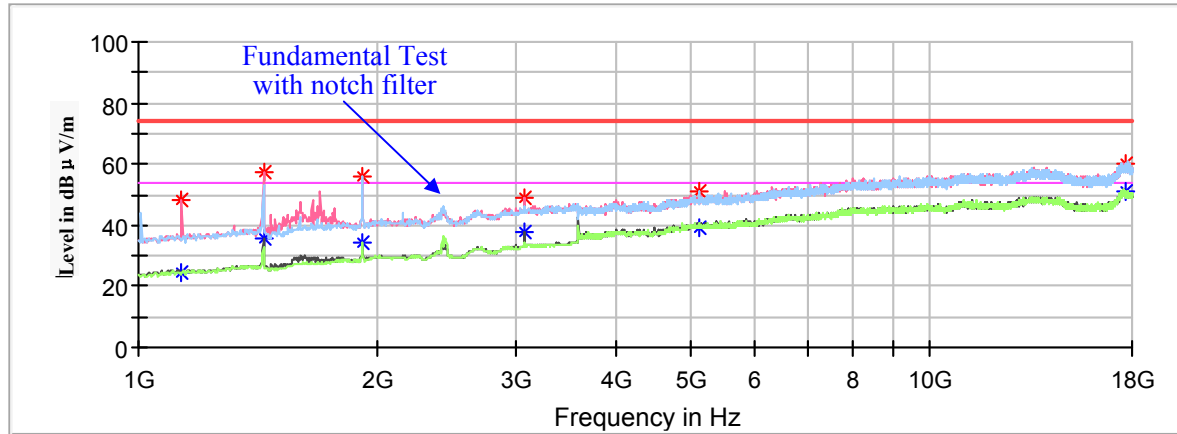Middle Channel: 2437MHz**Full Spectrum**

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1132.600000	48.35	---	200.0	V	249.0	-3.5	74.00	25.65
1132.600000	---	24.50	200.0	V	249.0	-3.5	54.00	29.50
1438.600000	57.61	---	150.0	V	208.0	-1.6	74.00	16.39
1438.600000	---	35.51	150.0	V	208.0	-1.6	54.00	18.49
1918.000000	56.05	---	200.0	H	166.0	1.5	74.00	17.95
1918.000000	---	34.50	200.0	H	166.0	1.5	54.00	19.50
3070.600000	48.62	---	100.0	V	169.0	6.2	74.00	25.38
3070.600000	---	37.82	100.0	V	169.0	6.2	54.00	16.18
5100.400000	---	39.04	150.0	V	262.0	11.8	54.00	14.96
5100.400000	51.15	---	150.0	V	262.0	11.8	74.00	22.85
17656.600000	---	50.89	200.0	V	52.0	22.9	54.00	3.11
17656.600000	60.46	---	200.0	V	52.0	22.9	74.00	13.54

High Channel: 2452MHz

Full Spectrum

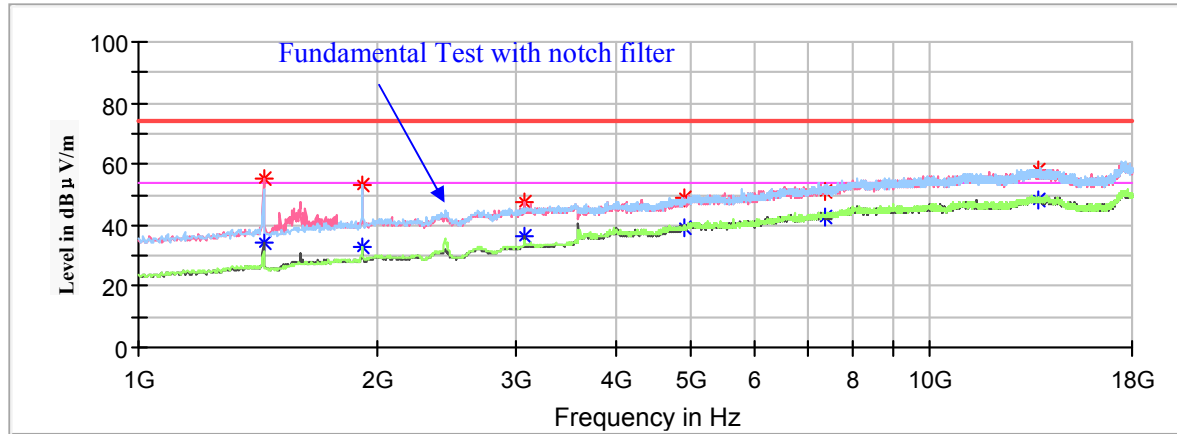


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1438.600000	---	34.50	150.0	V	285.0	-1.6	54.00	19.50
1438.600000	54.99	---	150.0	V	285.0	-1.6	74.00	19.01
1918.000000	---	33.11	150.0	H	179.0	1.5	54.00	20.89
1918.000000	52.93	---	150.0	H	179.0	1.5	74.00	21.07
3070.600000	---	36.43	100.0	V	157.0	6.2	54.00	17.57
3070.600000	47.46	---	100.0	V	157.0	6.2	74.00	26.54
4904.000000	---	39.40	150.0	V	274.0	11.2	54.00	14.60
4904.000000	48.80	---	150.0	V	374.0	11.2	74.00	25.20
7356.000000	51.25	---	200.0	V	333.0	15.5	74.00	22.75
7356.000000	---	42.99	200.0	V	333.0	15.5	54.00	11.01
13722.800000	---	48.11	100.0	V	346.0	20.8	54.00	5.89
13722.800000	58.38	---	100.0	V	346.0	20.8	74.00	15.62

18GHz-25GHz:


Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **low channel of 802.11b mode in X-axis of orientation** was recorded

Horizontal

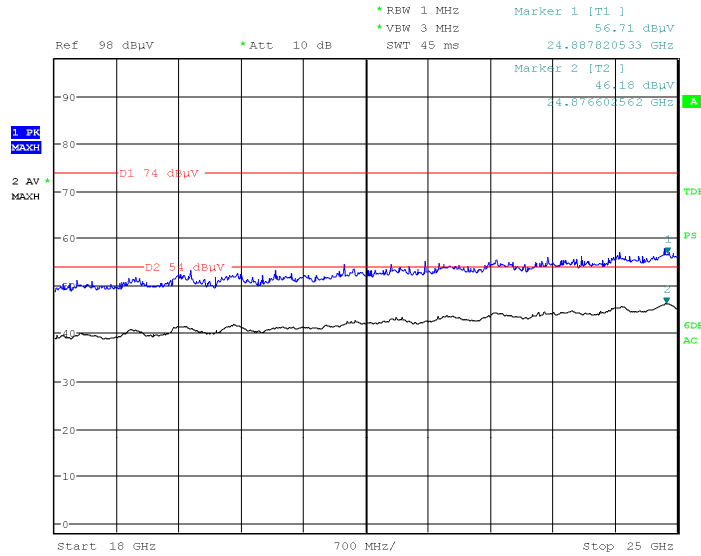

Date: 22.MAY.2018 12:21:29

Vertical

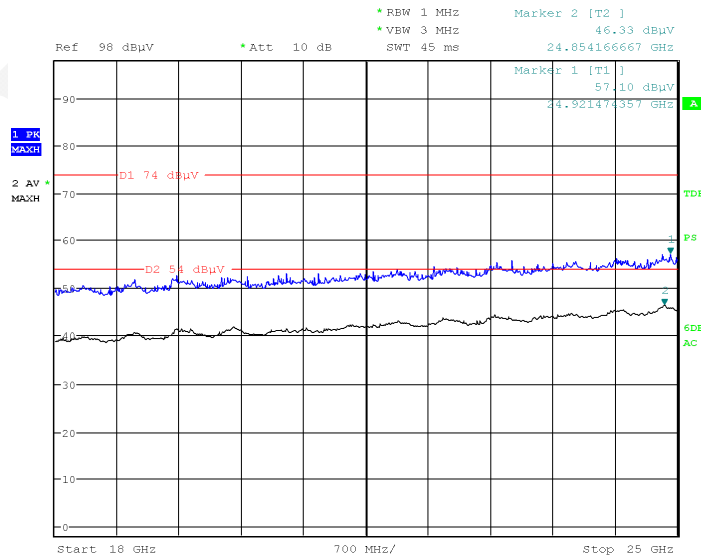

Date: 22.MAY.2018 12:11:25

Fundamental Test & Restricted Bands Emissions Test:

Note:

1. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude

802.11b Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2412.000000	---	103.21	200.0	V	319.0	2.9	/	/
2412.000000	109.62	---	200.0	V	319.0	2.9	/	/
2412.000000	---	100.23	200.0	H	18.0	2.9	/	/
2412.000000	106.75	---	200.0	H	18.0	2.9	/	/
2390.000000	49.56	---	150.0	V	341.0	2.8	74.00	24.44
2390.000000	---	43.38	150.0	V	341.0	2.8	54.00	10.62
Middle Channel: 2437MHz								
2437.000000	---	103.43	200.0	V	120.0	2.9	/	/
2437.000000	109.82	---	200.0	V	120.0	2.9	/	/
2437.000000	---	100.75	200.0	H	303.0	2.9	/	/
2437.000000	106.92	---	200.0	H	303.0	2.9	/	/
High Channel: 2462MHz								
2462.000000	108.82	---	150.0	V	339.0	3.0	/	/
2462.000000	---	102.23	150.0	V	339.0	3.0	/	/
2462.000000	105.27	---	150.0	H	102.0	3.0	/	/
2462.000000	---	99.42	150.0	H	102.0	3.0	/	/
2483.500000	47.51	---	200.0	V	253.0	3.0	74.00	26.49
2483.500000	---	41.52	200.0	V	253.0	3.0	54.00	12.48

802.11g Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2412.000000	---	95.68	200.0	V	221.0	2.9	/	/
2412.000000	101.32	---	200.0	V	221.0	2.9	/	/
2412.000000	---	92.82	200.0	H	72.0	2.9	/	/
2412.000000	98.43	---	200.0	H	72.0	2.9	/	/
2390.000000	54.09	---	150.0	V	141.0	2.8	74.00	19.91
2390.000000	---	43.73	150.0	V	141.0	2.8	54.00	10.27
Middle Channel: 2437MHz								
2437.000000	102.85	---	200.0	V	83.0	2.9	/	/
2437.000000	---	96.80	200.0	V	83.0	2.9	/	/
2437.000000	99.82	---	200.0	H	258.0	2.9	/	/
2437.000000	---	93.27	200.0	H	258.0	2.9	/	/
High Channel: 2462MHz								
2462.000000	---	97.86	150.0	V	348.0	3.0	/	/
2462.000000	103.68	---	150.0	V	348.0	3.0	/	/
2462.000000	---	94.70	150.0	H	180.0	3.0	/	/
2462.000000	100.89	---	150.0	H	180.0	3.0	/	/
2483.500000	49.96	---	200.0	V	229.0	3.0	74.00	24.04
2483.500000	---	42.32	200.0	V	229.0	3.0	54.00	11.68

802.11n-HT20 Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2412.000000	---	94.05	200.0	V	187.0	2.9	/	/
2412.000000	100.98	---	200.0	V	187.0	2.9	/	/
2412.000000	---	91.72	200.0	H	238.0	2.9	/	/
2412.000000	97.47	---	200.0	H	238.0	2.9	/	/
2390.000000	52.40	---	150.0	V	48.0	2.8	74.00	21.60
2390.000000	---	42.91	150.0	V	48.0	2.8	54.00	11.09
Middle Channel: 2437MHz								
2437.000000	---	95.05	200.0	V	243.0	2.9	/	/
2437.000000	101.28	---	200.0	V	243.0	2.9	/	/
2437.000000	---	92.29	200.0	H	206.0	2.9	/	/
2437.000000	98.46	---	200.0	H	206.0	2.9	/	/
High Channel: 2462MHz								
2462.000000	---	94.13	100.0	V	333.0	3.0	/	/
2462.000000	100.74	---	100.0	V	333.0	3.0	/	/
2462.000000	---	91.76	200.0	H	75.0	3.0	/	/
2462.000000	97.32	---	200.0	H	75.0	3.0	/	/
2483.500000	49.40	---	150.0	V	158.0	3.0	74.00	24.60
2483.500000	---	41.50	150.0	V	158.0	3.0	54.00	12.50

802.11n-HT40 Mode: (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2422MHz								
2422.000000	---	93.36	200.0	V	158.0	2.9	/	/
2422.000000	99.08	---	200.0	V	158.0	2.9	/	/
2422.000000	---	90.49	200.0	H	95.0	2.9	/	/
2422.000000	96.24	---	200.0	H	95.0	2.9	/	/
2390.000000	50.95	---	200.0	V	213.0	2.8	74.00	23.05
2390.000000	---	44.33	200.0	V	213.0	2.8	54.00	9.67
Middle Channel: 2437MHz								
2437.000000	---	94.17	150.0	V	310.0	2.9	/	/
2437.000000	100.22	---	150.0	V	310.0	2.9	/	/
2437.000000	---	91.02	150.0	H	203.0	2.9	/	/
2437.000000	97.34	---	150.0	H	203.0	2.9	/	/
High Channel: 2452MHz								
2452.000000	---	94.98	150.0	V	208.0	3.0	/	/
2452.000000	100.86	---	150.0	V	208.0	3.0	/	/
2452.000000	---	92.07	150.0	H	206.0	3.0	/	/
2452.000000	97.65	---	150.0	H	206.0	3.0	/	/
2483.500000	---	44.51	150.0	V	93.0	3.0	54.00	9.49
2483.500000	54.51	---	150.0	V	93.0	3.0	74.00	19.49

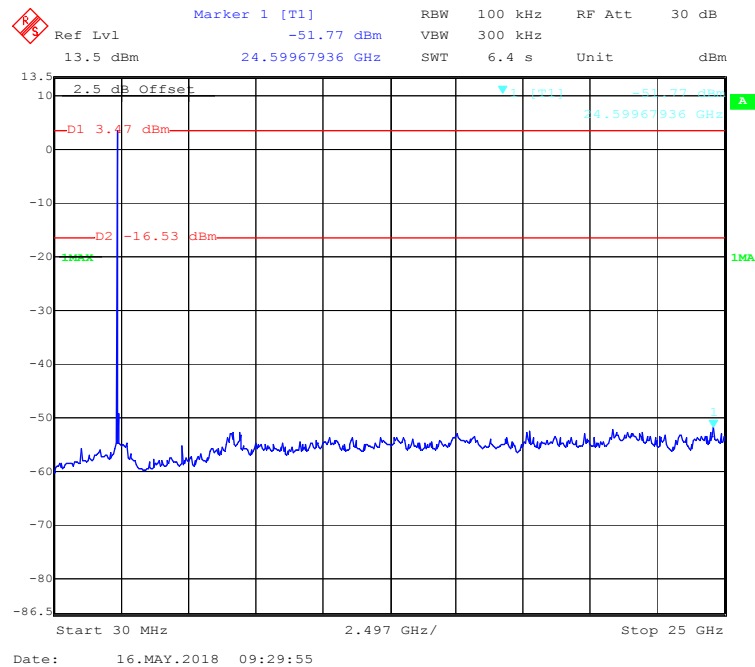
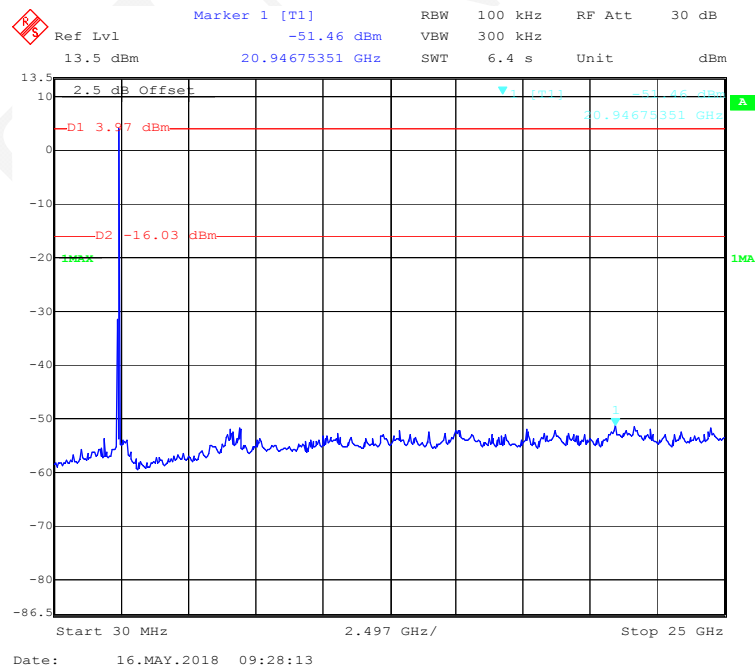
Conducted Spurious Emissions at Antenna Port**802.11b Mode Low Channel****802.11b Mode Middle Channel**

802.11b Mode High Channel

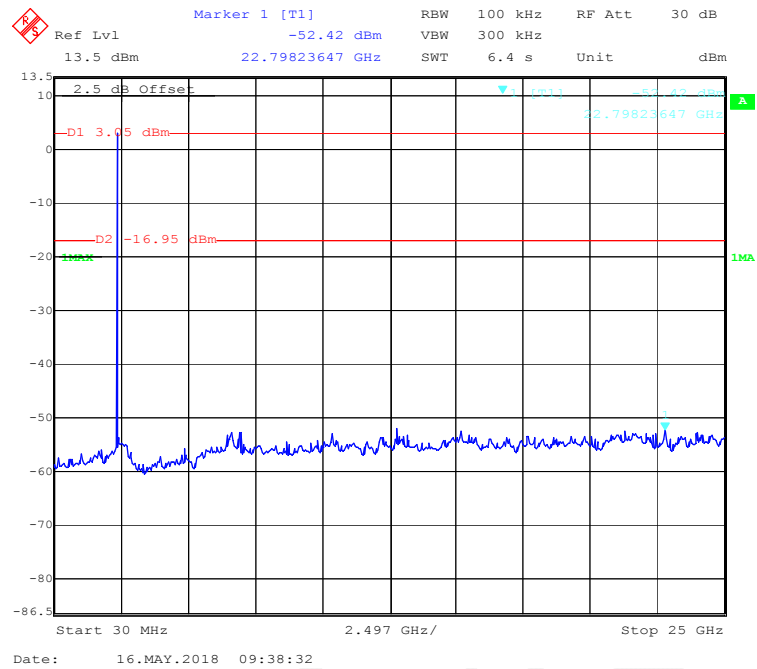


802.11g Mode Low Channel

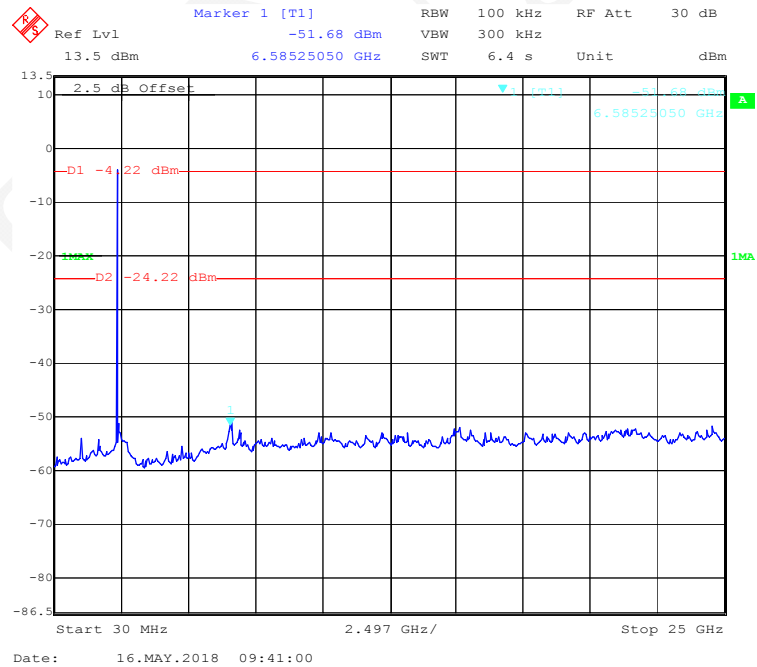


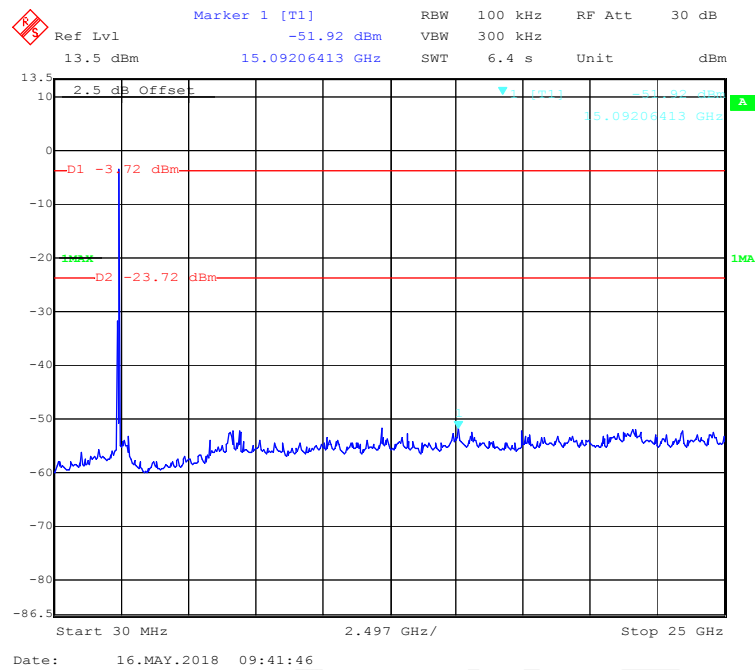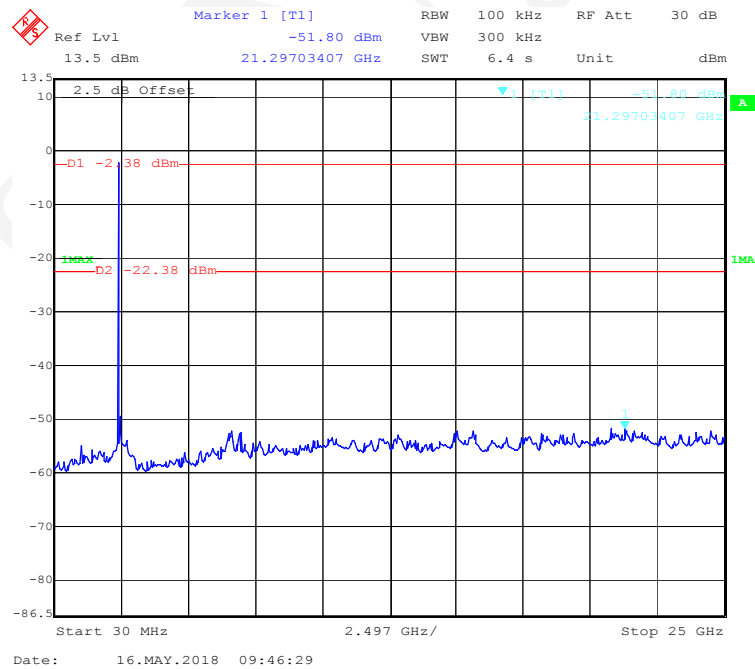802.11g Mode Middle Channel**802.11g Mode High Channel**


802.11n-HT20 Mode Low Channel

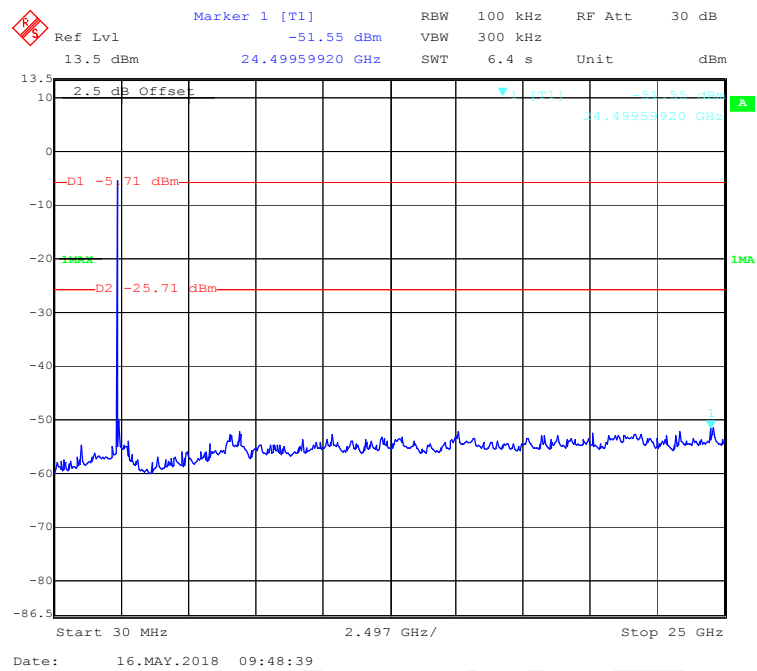


802.11n-HT20 Mode Middle Channel

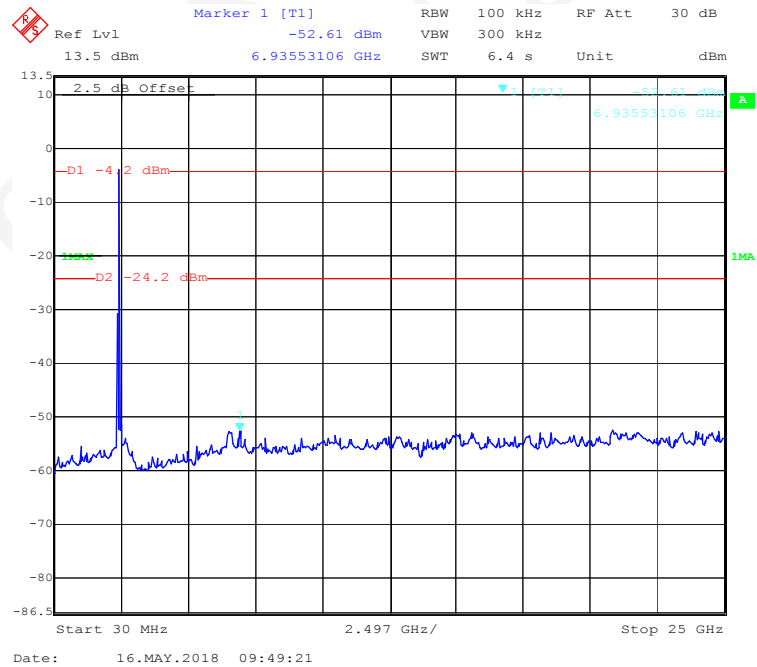


802.11n-HT20 Mode High Channel

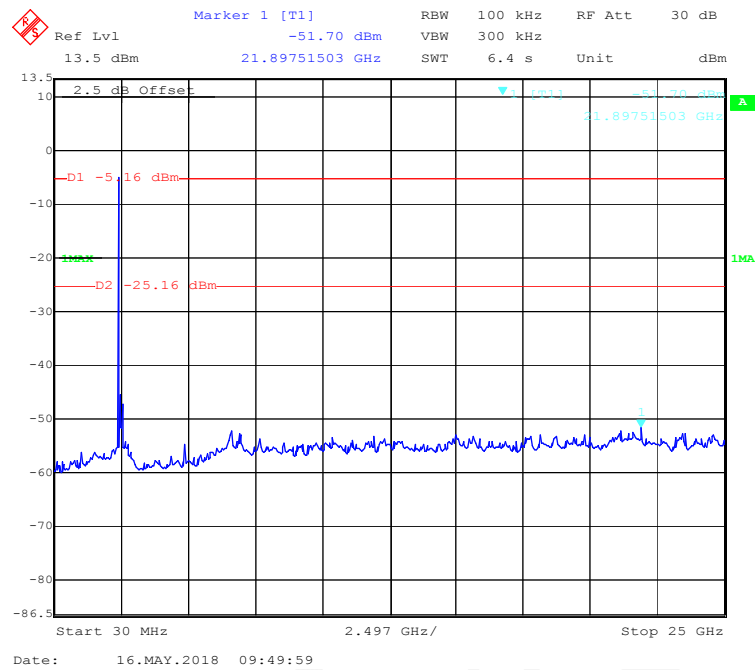


802.11n-HT40 Mode Low Channel

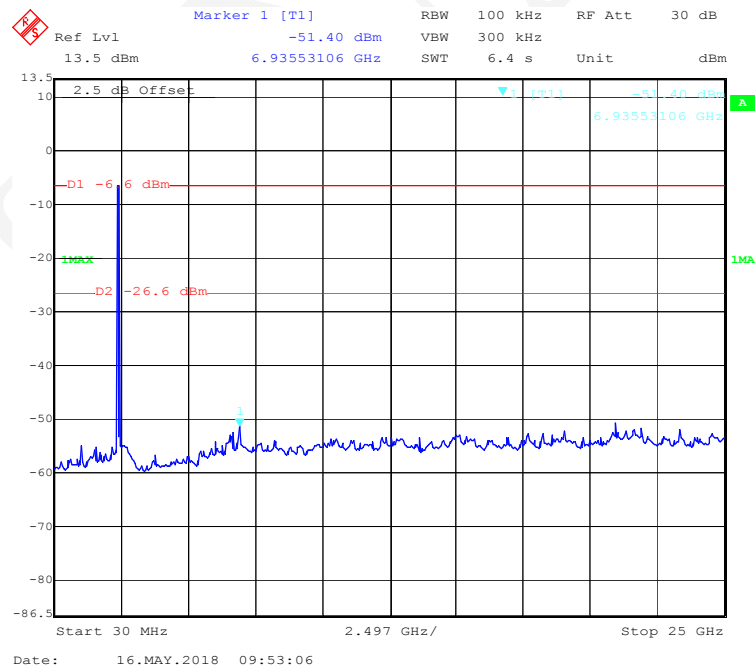

802.11n-HT40 Mode Middle Channel

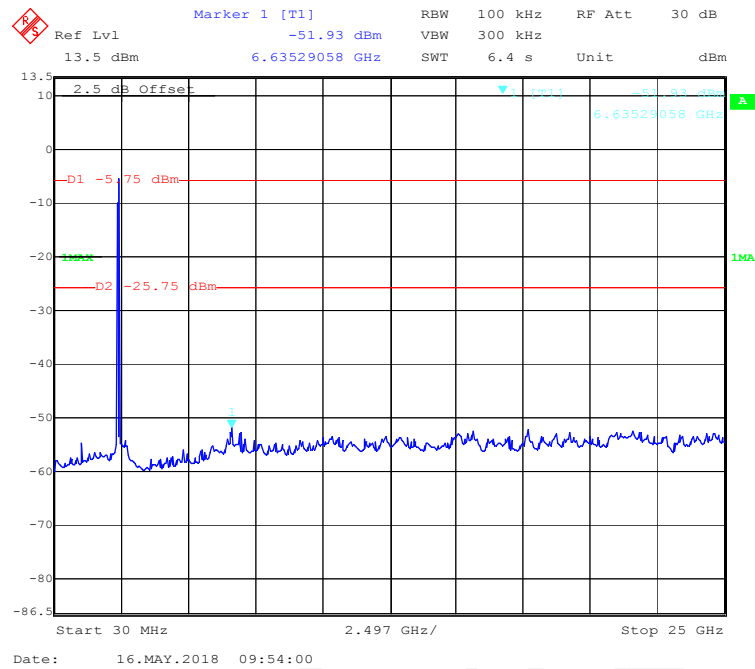

802.11n-HT40 Mode High Channel

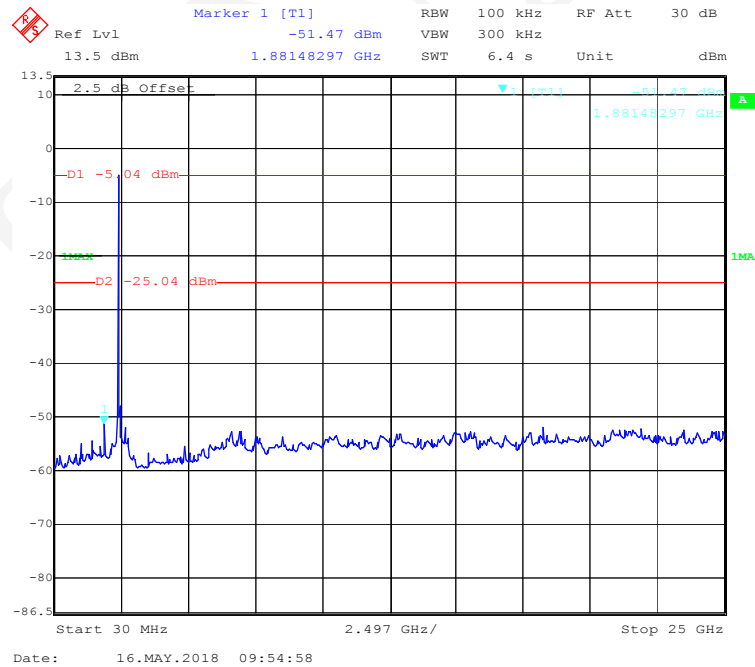


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v04 sub-clause 8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Test Data****Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	51 %
ATM Pressure:	101.3 kPa

The testing was performed by Mark Yu on 2018-05-15 to 2018-06-04.

EUT operation mode: Transmitting

Test Result: Pass

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
802.11b Mode			
Low	2412	10.100	≥ 0.5
Middle	2437	10.100	≥ 0.5
High	2462	10.100	≥ 0.5
802.11g Mode			
Low	2412	16.473	≥ 0.5
Middle	2437	16.413	≥ 0.5
High	2462	16.413	≥ 0.5
802.11n-HT20 Mode			
Low	2412	17.615	≥ 0.5
Middle	2437	17.615	≥ 0.5
High	2462	17.615	≥ 0.5
802.11n-HT40 Mode			
Low	2422	35.297	≥ 0.5
Middle	2437	35.261	≥ 0.5
High	2452	35.297	≥ 0.5

Delta 1 [T1] RBW 100 kHz RF Att 30 dB
 Ref Lvl 17.5 dBm 10.10020040 MHz VBW 300 kHz Unit dBm
 17.5 dBm 10.10020040 MHz
 2.5 dB Offset
 -D1 6.51 dBm
 -D2 0.51 dBm
 1 [T1] -0.24 dBm
 1 [T1] 3.40691084 GHz
 1 [T1] 10.10020040 MHz
 1MAX
 1MA
 Center 2.412 GHz 3 MHz/
 Span 30 MHz
 Date: 4 JUN. 2018 13:29:21

Delta 1 [T1] RBW 100 kHz RF Att 30 dB
 Ref Lvl 17.5 dBm VBW 300 kHz
 10.10020040 MHz SWT 7.5 ms Unit dBm

2.5 dB Offset
 -D1 6.26 dBm
 -D2 0.26 dBm
 1 [T1] -6.47 dBm
 1 [T1] 1.51 dB
 10.10020040 MHz
 1MAX
 1MA

Center 2.437 GHz 3 MHz/
 Span 30 MHz

Date: 4.JUN.2018 13:32:13

Delta 1 [T1] 1.13 dB

RBW 100 kHz RF Att 30 dB

Ref Lvl 17.5 dBm 10.10020040 MHz Unit dBm

2.5 dB Offset

D1 6.75 dBm

D2 0.75 dBm

1 [T1]

1 [T1]

3.45691004 GHz

1.13 dB

10.10020040 MHz


1MAX

Center 2.462 GHz 3 MHz/ Span 30 MHz


Date: 4.JUN.2018 13:35:02

[illegible]


802.11g Mode Middle Channel

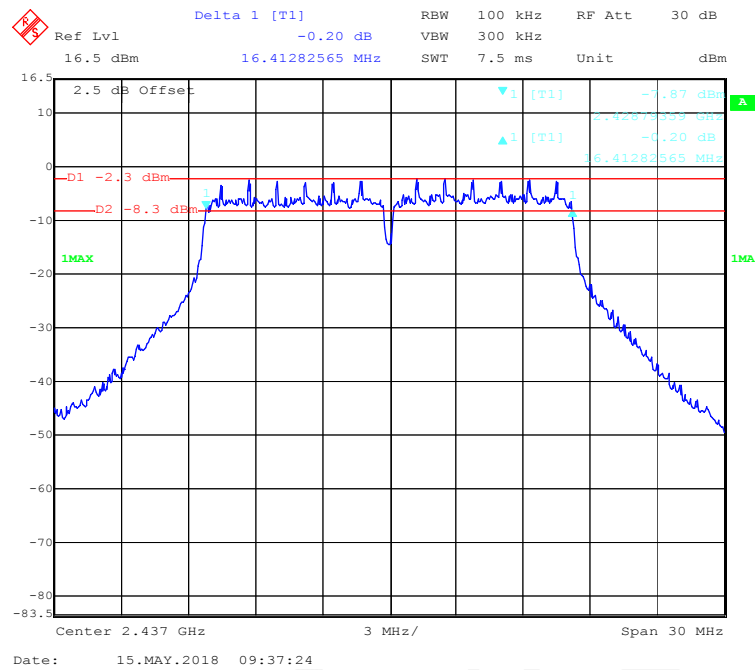


802.11g Mode High Channel


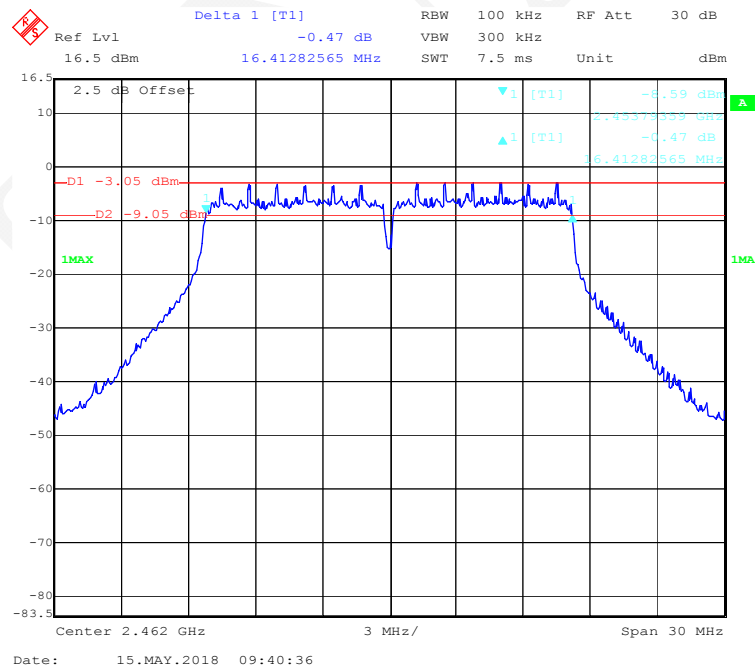


802.11n-HT20 Mode Low Channel

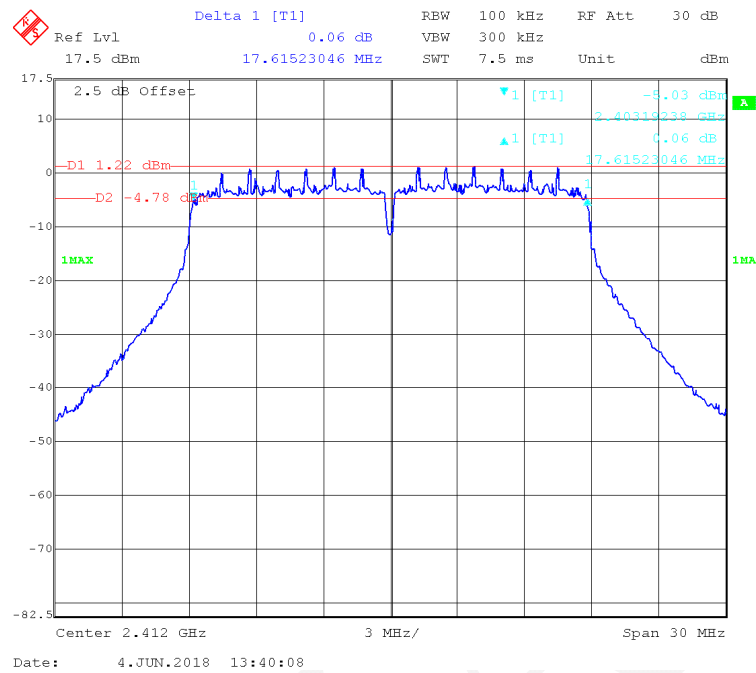

802.11n-HT20 Mode Middle Channel

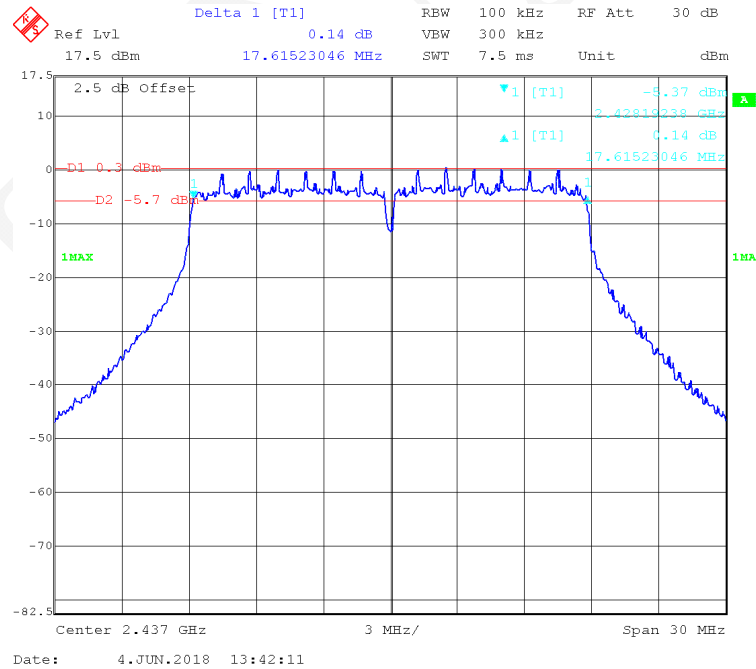

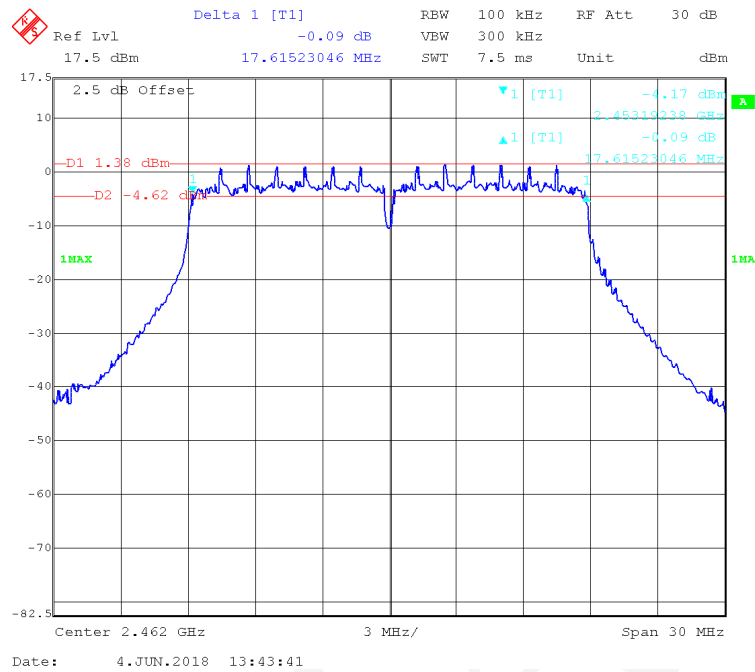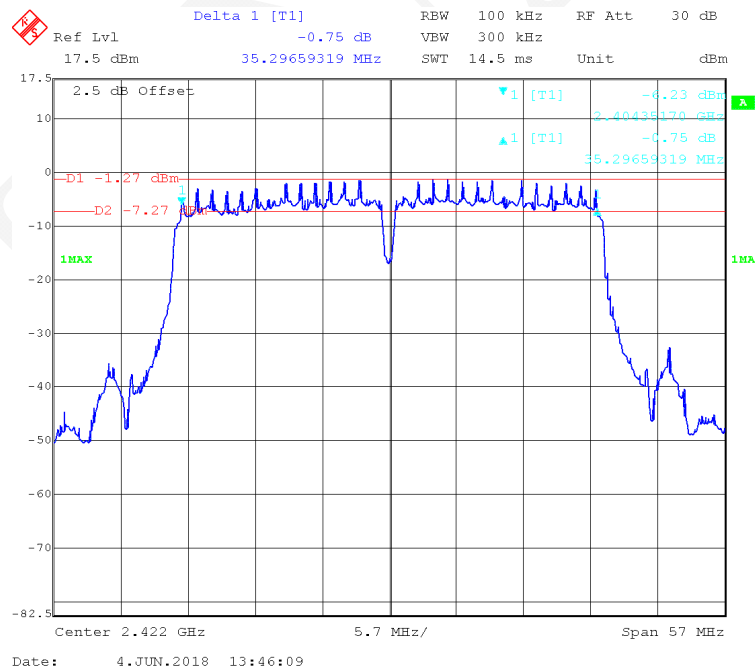802.11n-HT20 Mode High Channel**802.11n-HT40 Mode Low Channel**

Delta 1 [T1] -0.95 dB RBW 100 kHz RF Att 30 dB
 Ref Lvl 17.5 dBm VBW 300 kHz
 35.26052104 MHz SWT 14.5 ms Unit dBm

2.5 dB Offset

▼1 [T1] -7.30 dBm
 ▲1 [T1] -0.95 dBm
 2.41935170 GHz
 35.26052104 MHz

-D1 -2.47 dBm
 -D2 -8.47 dBm

1MAX

Center 2.437 GHz 5.7 MHz/ Span 57 MHz

Date: 4.JUN.2018 13:47:48

Delta 1 [T1] RBW 100 kHz RF Att 30 dB
 Ref Lvl 17.5 dBm -1.14 dB VBW 300 kHz
 17.5 dBm 35.29659319 MHz SWT 14.5 ms Unit dBm

2.5 dB Offset

▼1 [T1] -6.72 dBm
 ▲1 [T1] -1.14 dB
 2.43438170 GHz
 35.29659319 MHz

D1 -2.05 dBm
 D2 -8.05 dBm

1MAX

Center 2.452 GHz 5.7 MHz/ Span 57 MHz

Date: 4.JUN.2018 13:50:13

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v04 sub-clause 9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	54 %
ATM Pressure:	101.2 kPa

The testing was performed by Mark Yu on 2018-05-14.

EUT operation mode: Transmitting

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
802.11b Mode				
Low	2412	18.37	30	Pass
Middle	2437	18.35	30	Pass
High	2462	18.36	30	Pass
802.11g Mode				
Low	2412	15.47	30	Pass
Middle	2437	15.90	30	Pass
High	2462	15.56	30	Pass
802.11n-HT20 Mode				
Low	2412	15.76	30	Pass
Middle	2437	15.72	30	Pass
High	2462	15.33	30	Pass
802.11n-HT40 Mode				
Low	2422	15.34	30	Pass
Middle	2437	15.70	30	Pass
High	2452	15.79	30	Pass

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v04 sub-clause 13.2 and ANSI C63.10-2013 clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data**Environmental Conditions**


Temperature:	24.3 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Mark Yu on 2018-05-15.

EUT operation mode: Transmitting

Test Result: Compliance


802.11b Mode Left Side

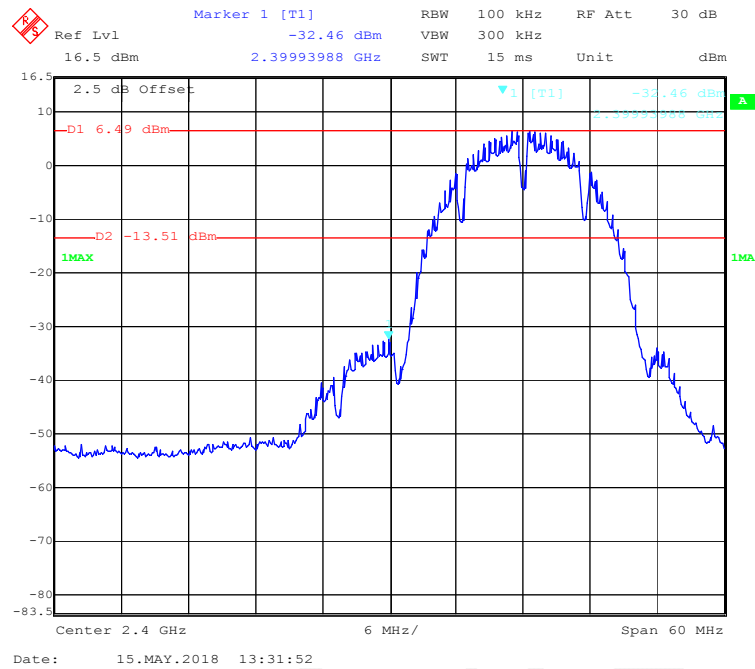


802.11b Mode Right Side




802.11g Mode Left Side

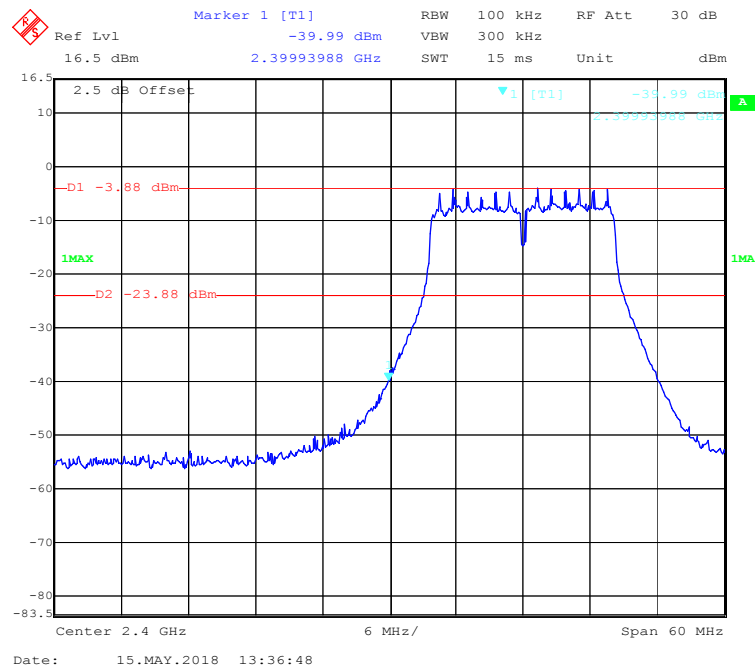


802.11g Mode Right Side

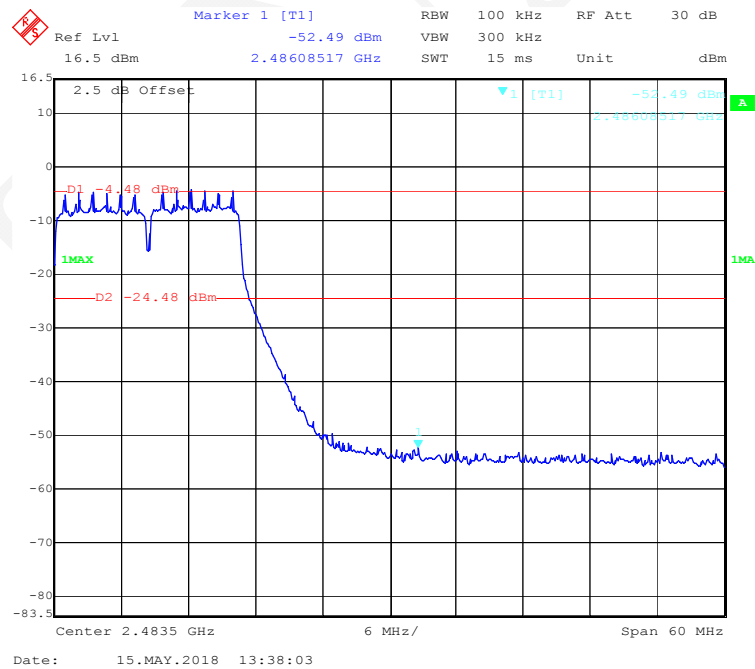


802.11n-HT20 Mode Left Side

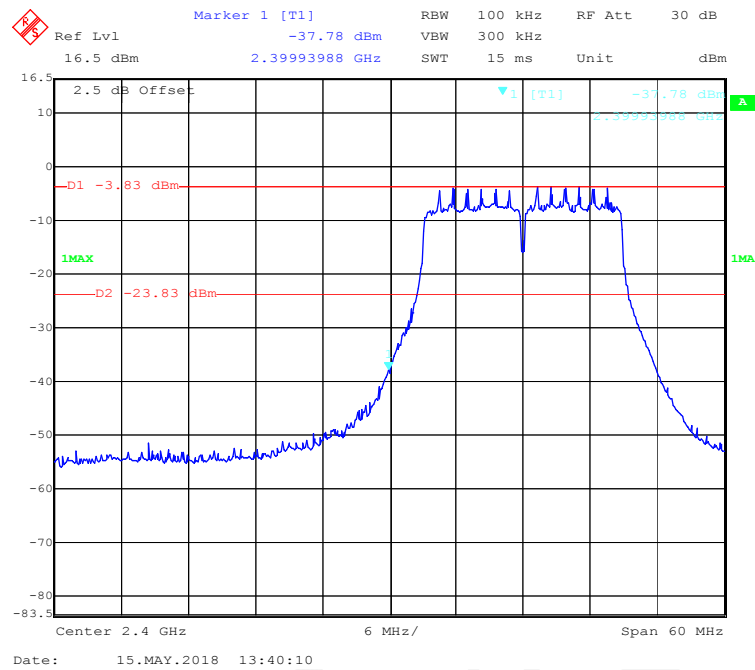


802.11n-HT20 Mode Right Side

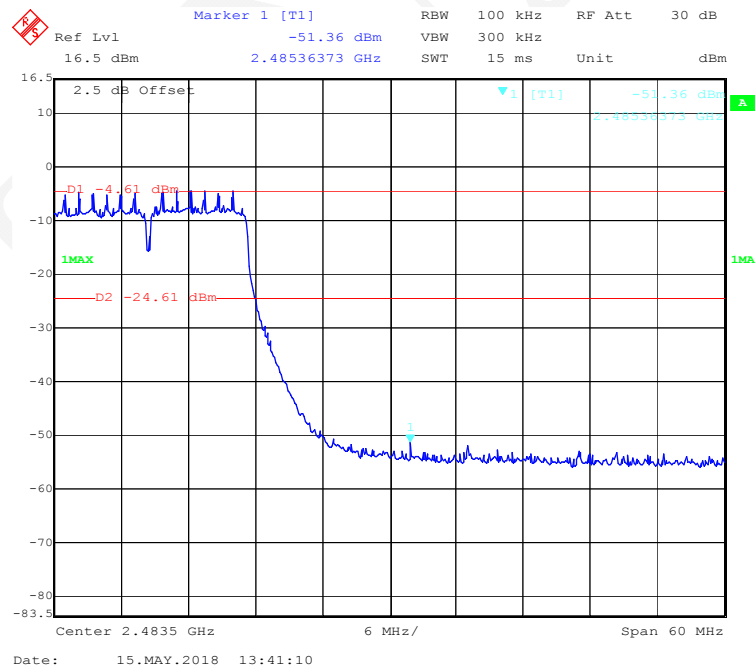

802.11n-HT40 Mode Left Side

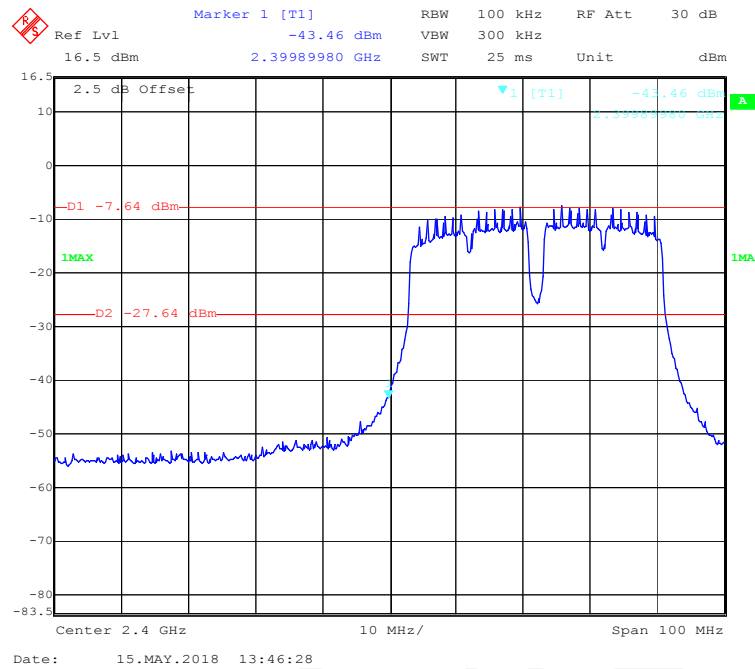

802.11n-HT40 Mode Right Side

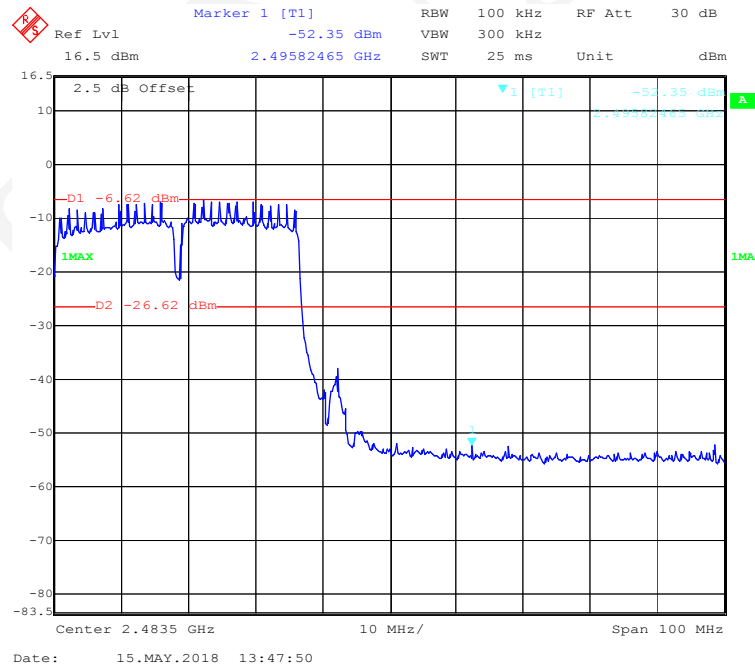

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v04 sub-clause 10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate Compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	50%
ATM Pressure:	101.3 kPa


The testing was performed by Mark Yu on 2018-05-15.

EUT operation mode: Transmitting


Test Result: Pass

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b Mode			
Low	2412	-8.26	≤ 8
Middle	2437	-8.54	≤ 8
High	2462	-6.99	≤ 8
802.11g Mode			
Low	2412	-17.93	≤ 8
Middle	2437	-16.37	≤ 8
High	2462	-17.96	≤ 8
802.11n-HT20 mode			
Low	2412	-19.08	≤ 8
Middle	2437	-18.08	≤ 8
High	2462	-18.73	≤ 8
802.11n-HT40 Mode			
Low	2422	-22.53	≤ 8
Middle	2437	-19.12	≤ 8
High	2452	-20.73	≤ 8


802.11b Mode Low Channel

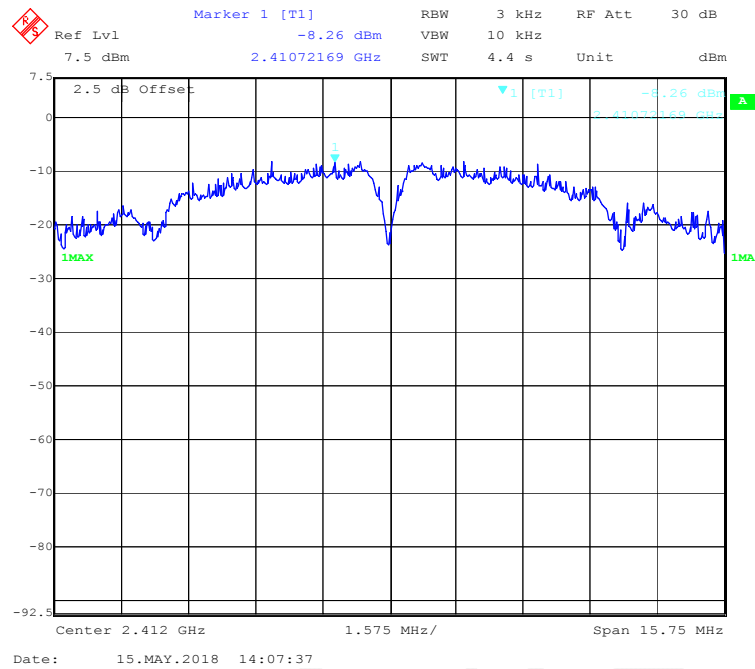


802.11b Mode Middle Channel

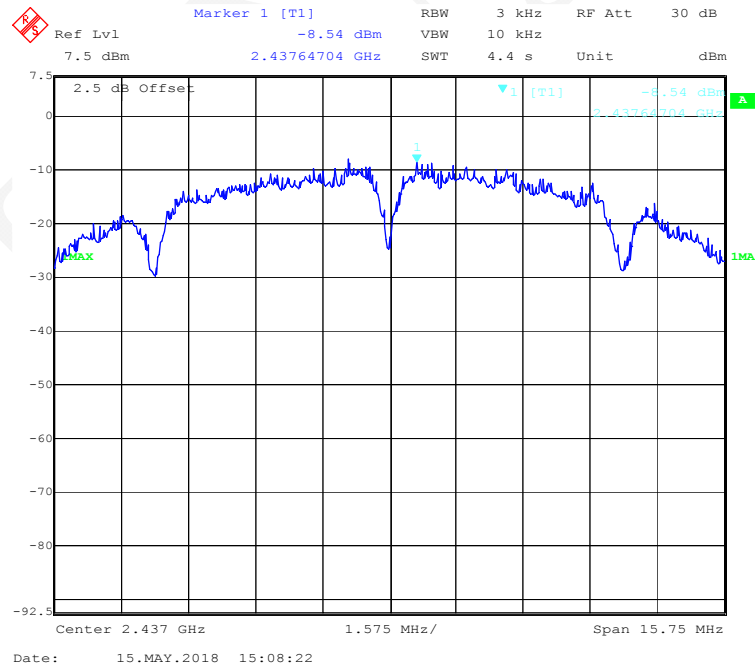


802.11b Mode High Channel

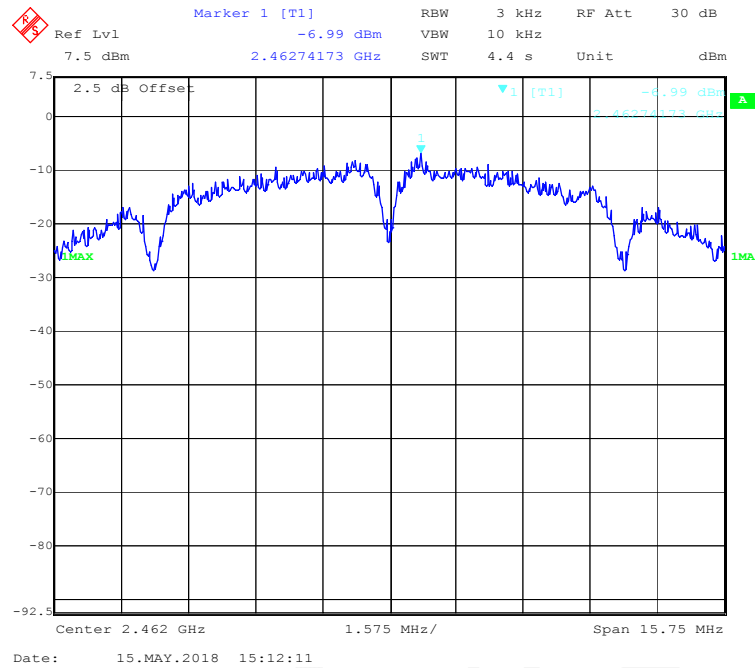


802.11g Mode Low Channel

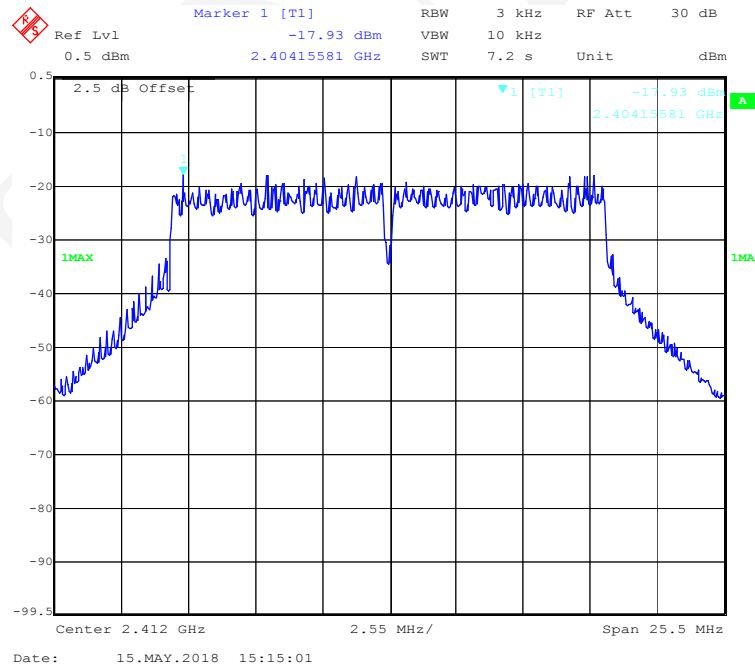


802.11g Mode Middle Channel

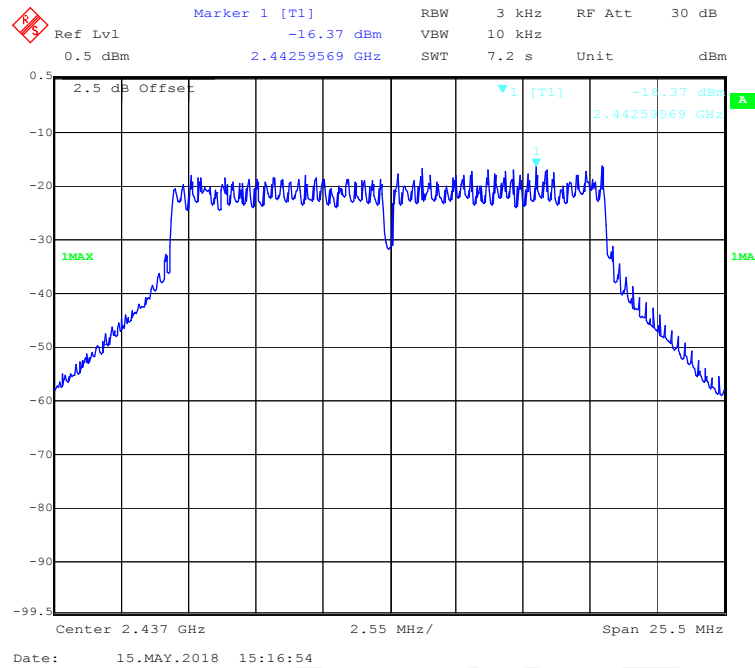


802.11g Mode High Channel

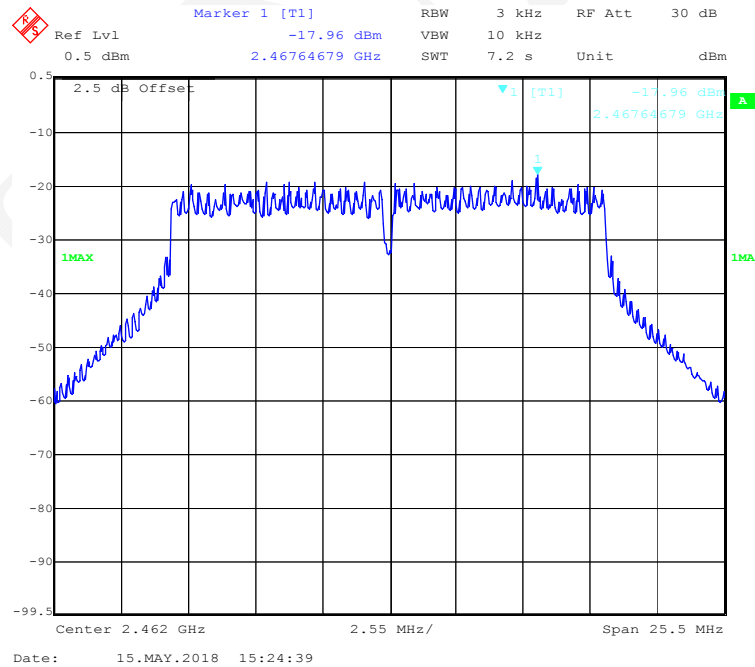


802.11n-HT20 Mode Low Channel

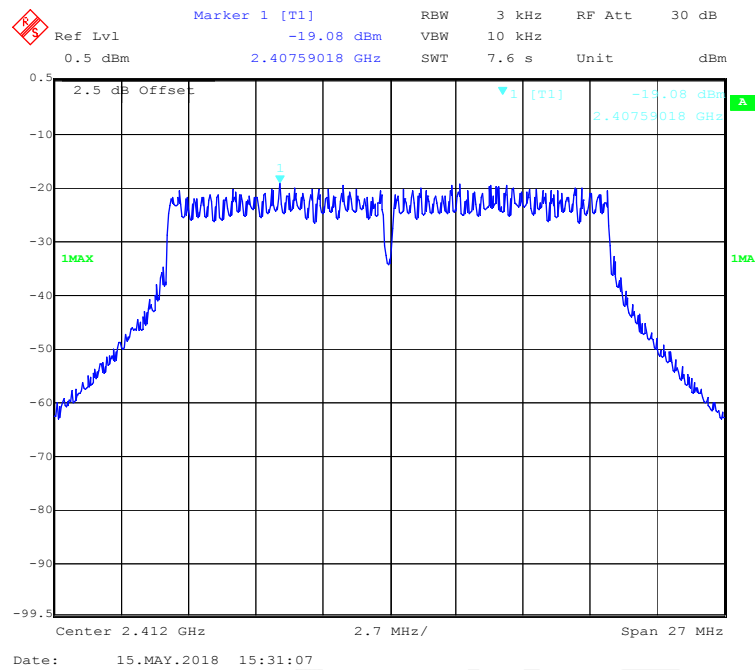


802.11n-HT20 Mode Middle Channel

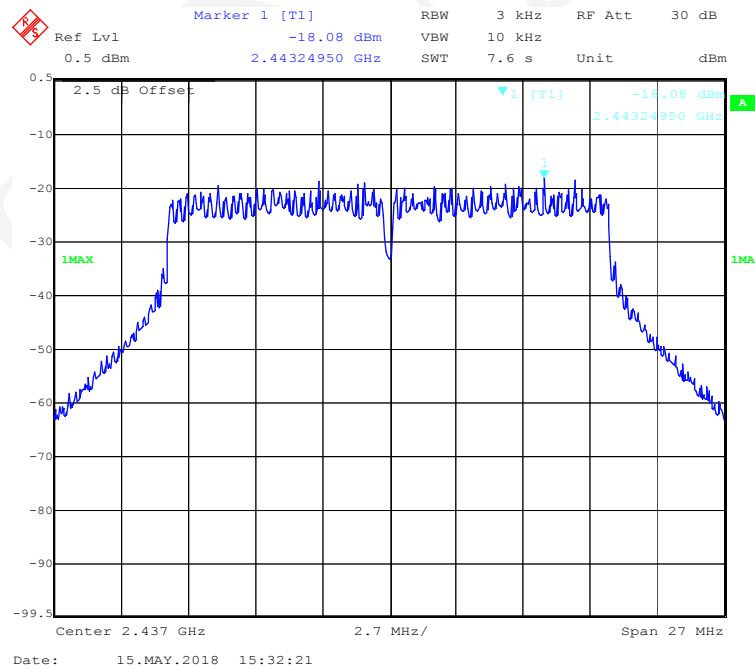


802.11n-HT20 Mode High Channel

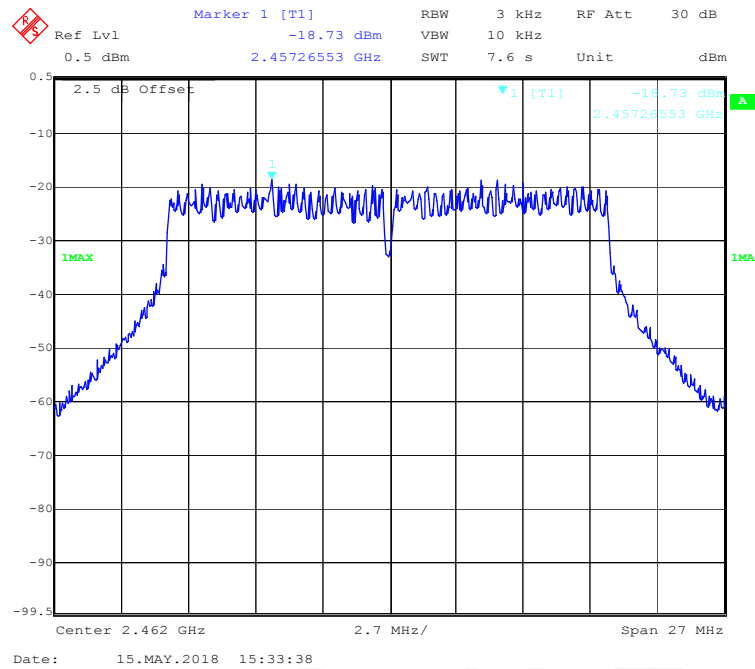


802.11n-HT40 Mode Low Channel

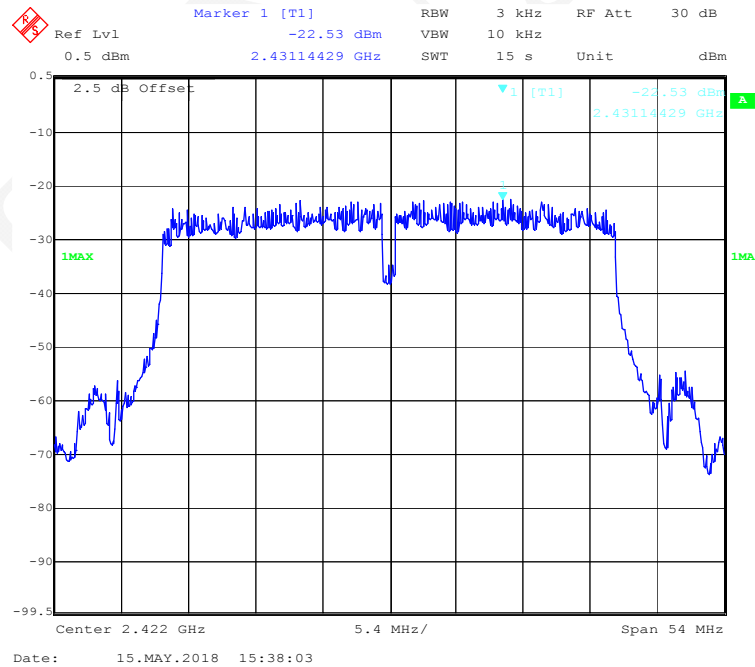

802.11n-HT40 Mode Middle Channel

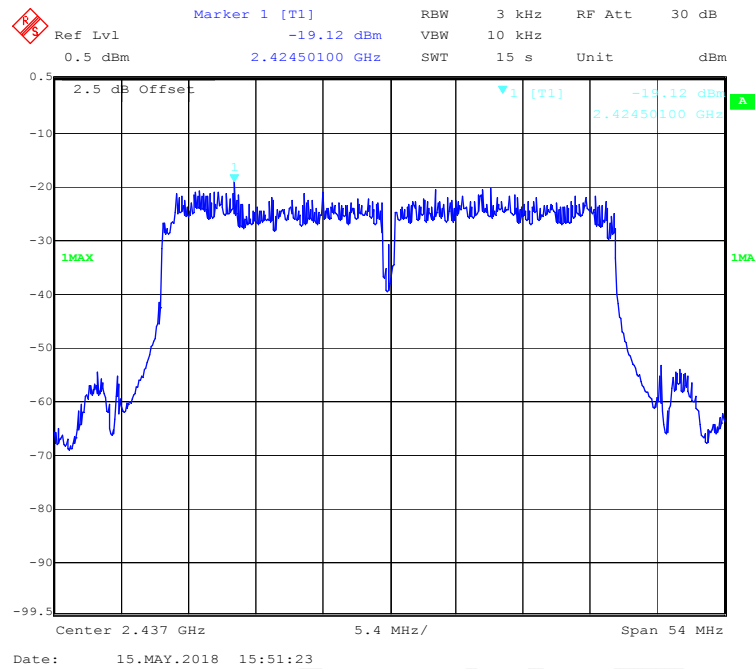

802.11n-HT40 Mode High Channel

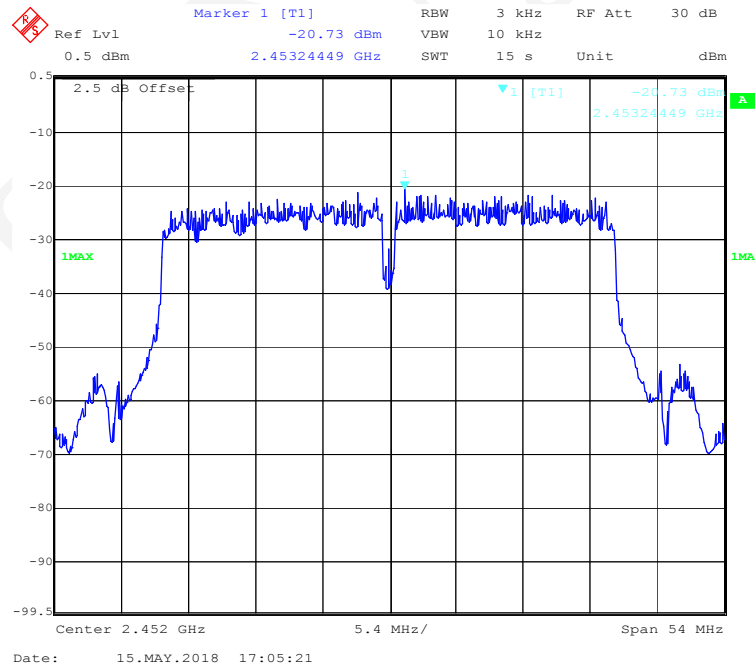

***** END OF REPORT *****