

FCC PART 15.247

TEST REPORT

For

NANOGRID LIMITED

ROOM 1405, 135 BONHAM STRAND TRADE CENTRE, 135 BONHAM STRAND, SHEUNG WAN,
HONG KONG

FCC ID: 2AEWY-NL14

Report Type: Original Report	Product Type: Smarter Hub
Test Engineer: Lion Xiao	<i>Lion Xiao</i>
Report Number: RDG150818050-00	
Report Date: 2015-10-29	
Reviewed By: Sula Huang RF Leader	<i>Sula Huang</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....4

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4

 OBJECTIVE.....4

 RELATED SUBMITTAL(S)/GRANT(S).....4

 TEST METHODOLOGY.....4

 TEST FACILITY.....5

SYSTEM TEST CONFIGURATION.....6

 DESCRIPTION OF TEST CONFIGURATION.....6

 EQUIPMENT MODIFICATIONS.....6

 EUT EXERCISE SOFTWARE.....6

 SUPPORT CABLE LIST AND DETAILS.....6

 CONFIGURATION OF TEST SETUP.....7

SUMMARY OF TEST RESULTS.....8

FCC §15.247 (i) & §1.1307 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....9

 APPLICABLE STANDARD.....9

FCC §15.203 - ANTENNA REQUIREMENT.....10

 APPLICABLE STANDARD.....10

 ANTENNA CONNECTOR CONSTRUCTION.....10

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS.....11

 APPLICABLE STANDARD.....11

 MEASUREMENT UNCERTAINTY.....11

 EUT SETUP.....11

 EMI TEST RECEIVER SETUP.....12

 TEST PROCEDURE.....12

 CORRECTED AMPLITUDE & MARGIN CALCULATION.....12

 TEST EQUIPMENT LIST AND DETAILS.....13

 TEST RESULTS SUMMARY.....13

 TEST DATA.....13

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....18

 APPLICABLE STANDARD.....18

 MEASUREMENT UNCERTAINTY.....18

 EUT SETUP.....18

 EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....19

 TEST PROCEDURE.....19

 CORRECTED AMPLITUDE & MARGIN CALCULATION.....20

 TEST EQUIPMENT LIST AND DETAILS.....20

 TEST RESULTS SUMMARY.....20

 TEST DATA.....20

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....25

 APPLICABLE STANDARD.....25

 TEST PROCEDURE.....25

 TEST EQUIPMENT LIST AND DETAILS.....25

 TEST DATA.....25

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....29

APPLICABLE STANDARD29
TEST PROCEDURE29
TEST EQUIPMENT LIST AND DETAILS.....29
TEST DATA29

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....33
APPLICABLE STANDARD33
TEST PROCEDURE33
TEST EQUIPMENT LIST AND DETAILS.....33
TEST DATA33

FCC §15.247(e) - POWER SPECTRAL DENSITY36
APPLICABLE STANDARD36
TEST PROCEDURE36
TEST EQUIPMENT LIST AND DETAILS.....36
TEST DATA36

DECLARATION LETTER40



GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *NANOGRID LIMITED*'s product, model number: *NL14-0001MN(FCC ID: 2AEWY-NL14)* (the "EUT") in this report was a *Smarter Hub*, which was measured approximately: 7.6 cm (L) x 8.0 cm (W) x 6.4cm (H), rated input voltage: DC 5.0V from adapter.

Adapter 1

Model No: NSA8UU-050150

Input: AC 100-240v, 50/60Hz 0.2A

Output: DC 5V-1A

Adapter 2

Model No: SC050100-US

Input: AC 100-240v, 50/60Hz 0.4A

Output: DC 5V-1000mA

Note: The series product, model NL14-0001MN, NL14-0001XX are electrically identical, the difference between them are color and pattern, we selected NL14-0001MN for testing, the details was explained in the attached declaration letter.

All measurement and test data in this report was gathered from production sample serial number: 150818050 (Assigned by BACL, Dongguan). The EUT was received on 2015-08-18.

Objective

This report is prepared on behalf of *NANOGRID LIMITED* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FEMVA

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode, which was provided by manufacturer.

For Zigbee mode, 15 channels are provided to testing and CH11, CH18, CH25 and CH26 were selected to test.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
11	2405	19	2445
12	2410	20	2450
13	2415	21	2455
14	2420	22	2460
15	2425	23	2465
16	2430	24	2470
17	2435	25	2475
18	2440	26	2480

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software


The worst condition (maximum power with 100% duty cycle) was setting by the software as following table:

Test Software Version	Putty.exe			
Test Frequency	2405	2440	2475	2480
Power Level	-5	-5	-12	-26

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable*1	Yes	No	10	EUT	Router

Configuration of Test Setup

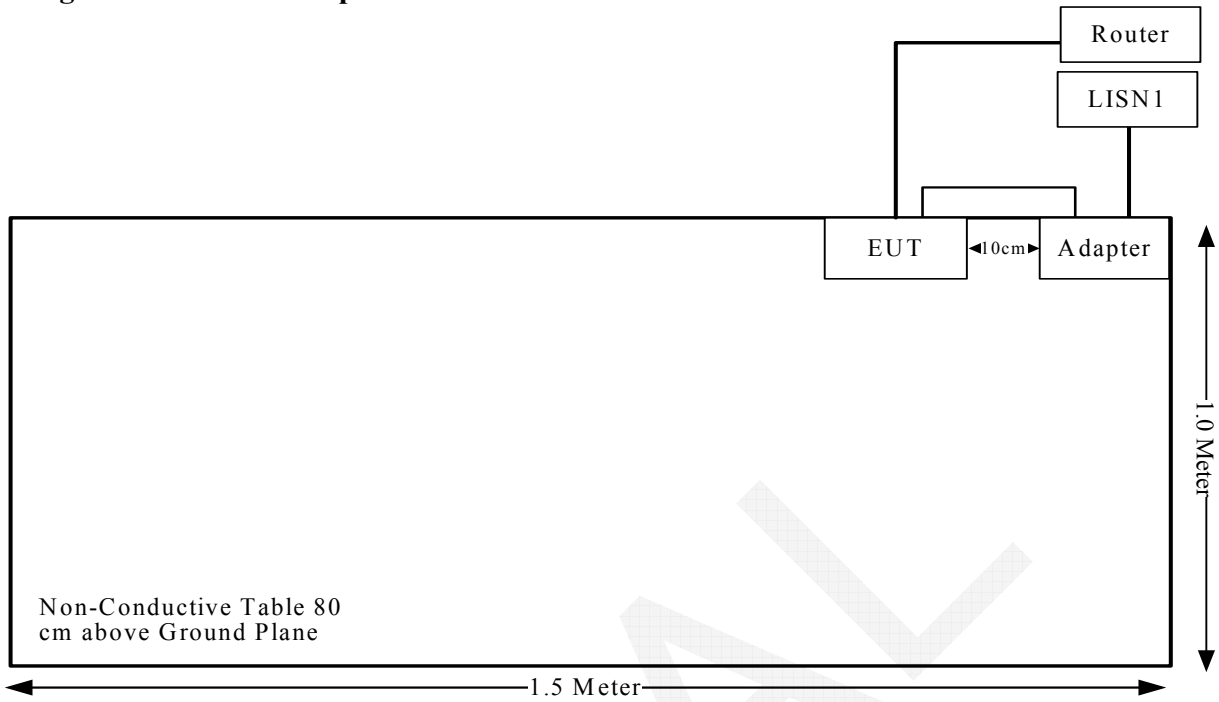

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum conducted output power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1307 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1307, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Tune-up Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Zigbee	2405-2480	1.0	1.26	16	39.81	20	0.01	1.0

Note: The tune-up power is 14+/-2dBm.

Result: The device meet FCC MPE at 20 cm distance.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has one integral antenna arrangement, which was permanently attached and the antenna gain is 1.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

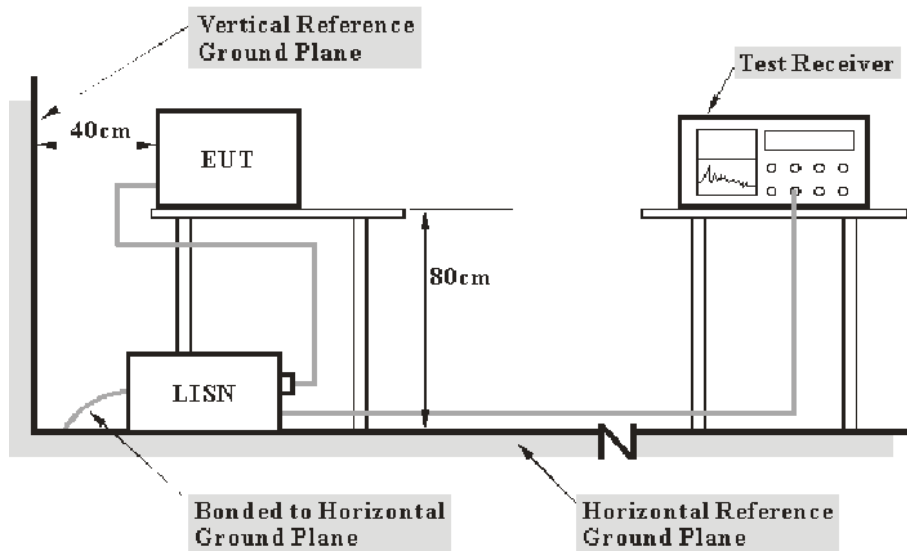

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emissions test, the adapter was connected to the main outlet of the first LISN and the Printer, Laptop and Modem were connected to outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2014-10-20	2015-10-20
R&S	L.I.S.N	ESH2-Z5	892107/021	2015-06-09	2016-06-09
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-12-11	2015-12-11
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

9.9 dB at 0.461346 MHz in the **Neutral** conducted mode for adapter 1

Test Data

Environmental Conditions


Temperature:	27.1 °C
Relative Humidity:	51 %
ATM Pressure:	100.1 kPa

The testing was performed by Lion Xiao on 2015-09-11

Test Mode: Transmitting

Adapter 1

AC120 V/60 Hz, Line:

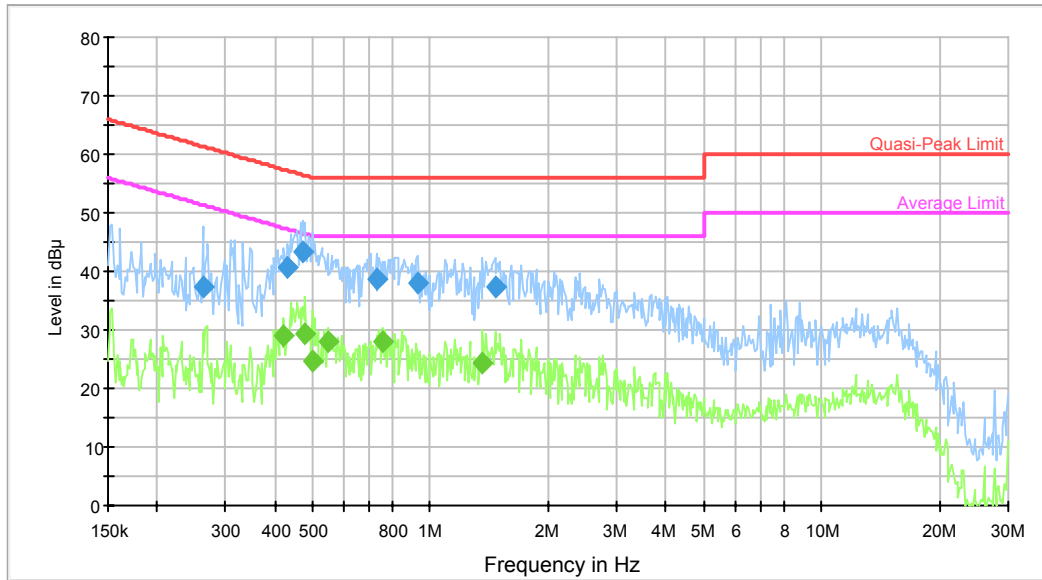


Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.262017	37.3	9.000	L1	9.8	24.1	61.4	Compliance
0.429420	40.8	9.000	L1	9.8	16.5	57.3	Compliance
0.472507	43.3	9.000	L1	9.8	13.2	56.5	Compliance
0.726569	38.8	9.000	L1	9.8	17.2	56.0	Compliance
0.930151	38.0	9.000	L1	9.8	18.0	56.0	Compliance
1.464886	37.5	9.000	L1	9.8	18.5	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.422630	29.1	9.000	L1	9.8	18.3	47.4	Compliance
0.480097	29.3	9.000	L1	9.8	17.0	46.3	Compliance
0.499611	24.5	9.000	L1	9.8	21.5	46.0	Compliance
0.545378	28.1	9.000	L1	9.8	17.9	46.0	Compliance
0.756101	28.0	9.000	L1	9.8	18.0	46.0	Compliance
1.363512	24.4	9.000	L1	9.8	21.6	46.0	Compliance

Note: U_{lab} is greater than U_{cispr} , no measured disturbance level, increased by 0.06dB ($U_{lab} - U_{cispr}$) exceeds the disturbance limit.

AC120 V/60 Hz, Neutral:

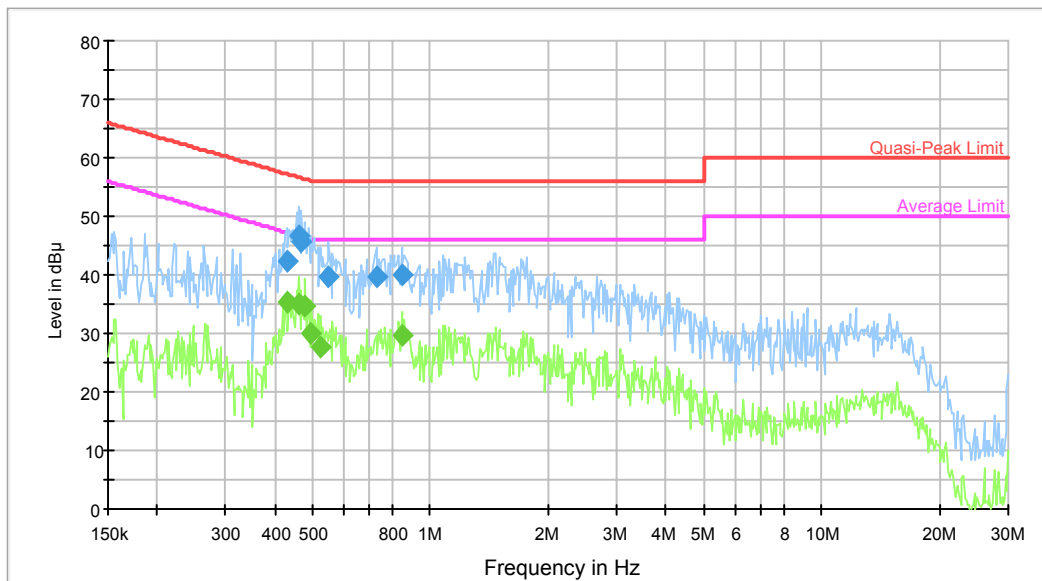


Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.429420	42.2	9.000	N	9.8	15.1	57.3	Compliance
0.461346	46.8	9.000	N	9.8	9.9	56.7	Compliance
0.468757	45.7	9.000	N	9.8	10.8	56.5	Compliance
0.549741	39.6	9.000	N	9.8	16.4	56.0	Compliance
0.726569	39.7	9.000	N	9.8	16.3	56.0	Compliance
0.845331	40.0	9.000	N	9.8	16.0	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.429420	35.4	9.000	N	9.8	11.9	47.3	Compliance
0.461346	34.9	9.000	N	9.8	11.8	46.7	Compliance
0.480097	34.7	9.000	N	9.8	11.6	46.3	Compliance
0.495646	29.9	9.000	N	9.8	16.2	46.1	Compliance
0.524077	27.6	9.000	N	9.8	18.4	46.0	Compliance
0.845331	29.8	9.000	N	9.8	16.2	46.0	Compliance

Note: U_{lab} is greater than U_{cisprr} , no measured disturbance level, increased by 0.06dB ($U_{lab} - U_{cisprr}$) exceeds the disturbance limit.

Adapter 2

AC120 V/60 Hz, Line:

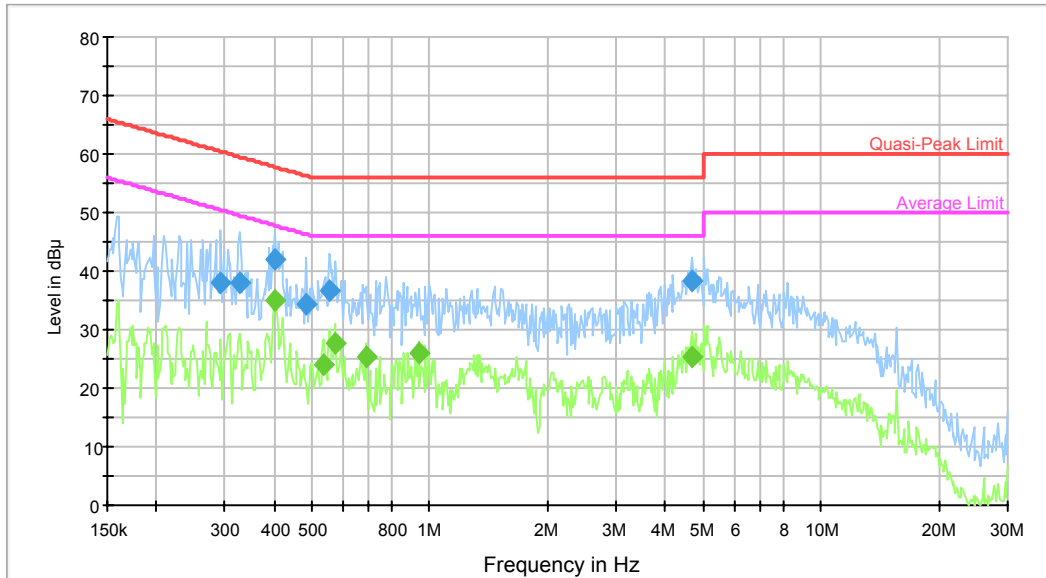


Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.292938	37.9	9.000	L1	9.8	22.5	60.4	Compliance
0.327509	38.0	9.000	L1	9.8	21.5	59.5	Compliance
0.402900	42.0	9.000	L1	9.8	15.8	57.8	Compliance
0.483938	34.3	9.000	L1	9.8	22.0	56.3	Compliance
0.554139	36.6	9.000	L1	9.8	19.4	56.0	Compliance
4.688581	38.2	9.000	L1	9.9	17.8	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.402900	35.0	9.000	L1	9.8	12.8	47.8	Compliance
0.536756	24.1	9.000	L1	9.8	21.9	46.0	Compliance
0.572086	27.6	9.000	L1	9.8	18.4	46.0	Compliance
0.687153	25.4	9.000	L1	9.8	20.6	46.0	Compliance
0.937592	25.9	9.000	L1	9.8	20.1	46.0	Compliance
4.688581	25.2	9.000	L1	9.9	20.8	46.0	Compliance

Note: U_{lab} is greater than U_{cispr} , no measured disturbance level, increased by 0.06dB ($U_{lab} - U_{cispr}$) exceeds the disturbance limit.

AC120 V, 60 Hz, Neutral:

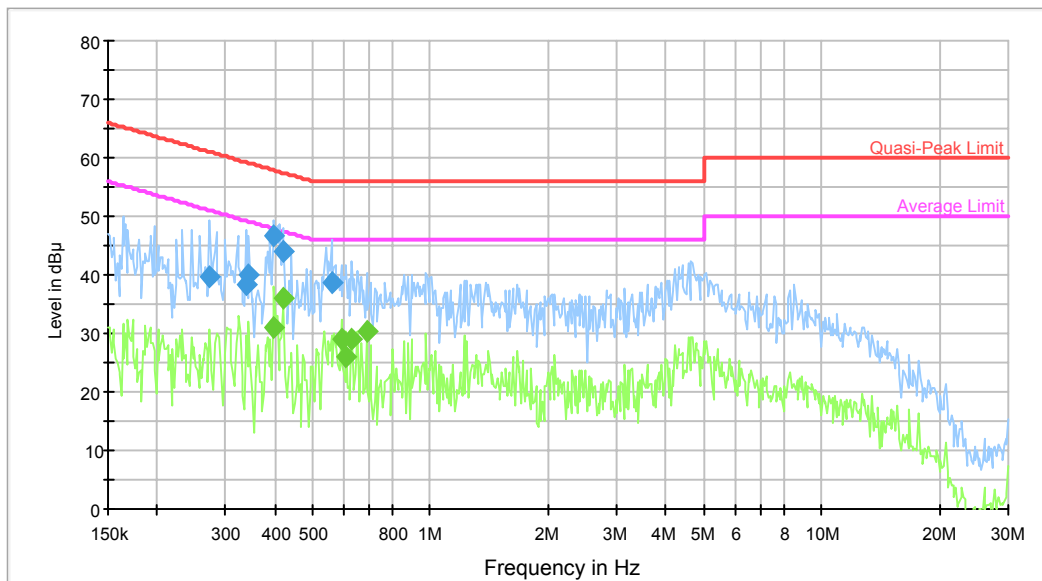

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.272666	39.8	9.000	N	9.8	21.2	61.0	Compliance
0.338116	38.4	9.000	N	9.8	20.8	59.2	Compliance
0.343548	40.0	9.000	N	9.8	19.1	59.1	Compliance
0.399703	46.6	9.000	N	9.8	11.3	57.9	Compliance
0.419276	44.1	9.000	N	9.8	13.4	57.5	Compliance
0.558572	38.8	9.000	N	9.8	17.2	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.399703	31.2	9.000	N	9.8	16.7	47.9	Compliance
0.419276	36.1	9.000	N	9.8	11.4	47.5	Compliance
0.590613	29.2	9.000	N	9.8	16.8	46.0	Compliance
0.609741	26.0	9.000	N	9.8	20.0	46.0	Compliance
0.629488	29.0	9.000	N	9.8	17.0	46.0	Compliance
0.687153	30.5	9.000	N	9.8	15.5	46.0	Compliance

Note: U_{lab} is greater than U_{cisprr} , no measured disturbance level, increased by 0.06dB ($U_{lab} - U_{cisprr}$) exceeds the disturbance limit.

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:


30M~200MHz: 5.0 dB
 200M~1GHz: 6.2 dB
 1G~6GHz: 4.45 dB
 6G~18GHz: 5.23 dB

Table 2 – Values of U_{cispr}


Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

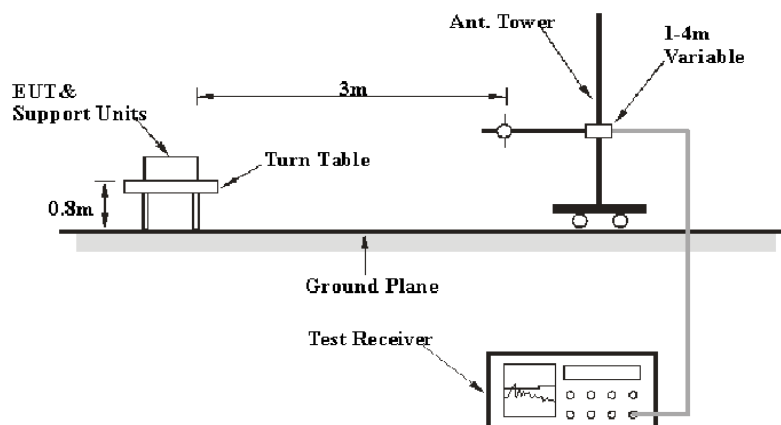

Above 1GHz:

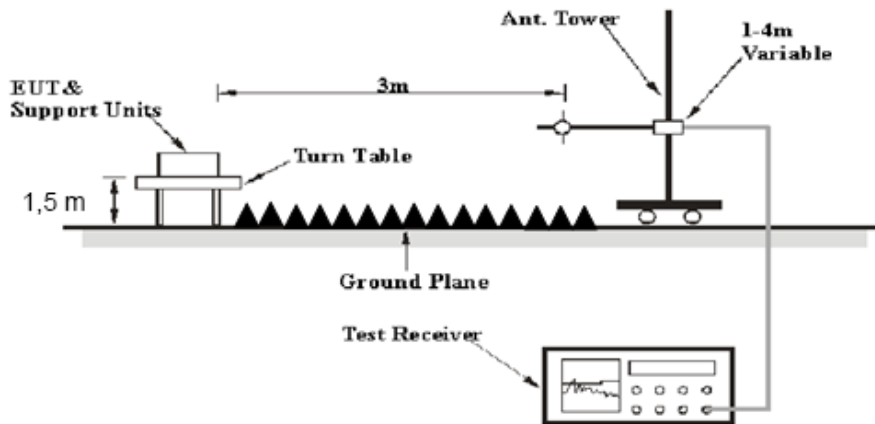

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2014-12-04	2015-12-04
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW- 18405536-JO	15964001001	2015-09-06	2016-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

0.15 dB at 2483.5 MHz in the Vertical polarization

Test Data

Environmental Conditions

Temperature:	26.2 °C
Relative Humidity:	52 %
ATM Pressure:	100.3 kPa

The testing was performed by Lion Xiao on 2015-09-15

Test Mode: Transmitting


Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2405 MHz									
2405	75.87	PK	H	25.65	3.66	0.00	105.18	N/A	N/A
2405	73.63	AV	H	25.65	3.66	0.00	102.94	N/A	N/A
2405	77.42	PK	V	25.65	3.66	0.00	106.73	N/A	N/A
2405	75.37	AV	V	25.65	3.66	0.00	104.68	N/A	N/A
2390	26.73	PK	V	25.61	3.63	0.00	55.97	74.00	18.03
2390	14.98	AV	V	25.61	3.63	0.00	44.22	54.00	9.78
4810	40.75	PK	V	30.61	5.05	27.41	49.00	74.00	25.00
4810	30.38	AV	V	30.61	5.05	27.41	38.63	54.00	15.37
7215	42.59	PK	V	34.12	6.62	25.91	57.42	74.00	16.58
7215	36.32	AV	V	34.12	6.62	25.91	51.15	54.00	2.85 *
9620	30.59	PK	V	35.99	8.54	27.53	47.59	74.00	26.41
9620	18.26	AV	V	35.99	8.54	27.53	35.26	54.00	18.74
2035	34.31	PK	V	24.69	3.28	27.45	34.83	74.00	39.17
2035	22.67	AV	V	24.69	3.28	27.45	23.19	54.00	30.81
250.7	36.4	QP	V	12.16	1.91	21.49	28.98	46.00	17.02
Middle Channel: 2440 MHz									
2440	77.61	PK	H	25.74	3.76	0.00	107.11	N/A	N/A
2440	75.3	AV	H	25.74	3.76	0.00	104.80	N/A	N/A
2440	79.59	PK	V	25.74	3.76	0.00	109.09	N/A	N/A
2440	77.14	AV	V	25.74	3.76	0.00	106.64	N/A	N/A
4880	40.38	PK	V	30.79	5.18	27.42	48.93	74.00	25.07
4880	30.8	AV	V	30.79	5.18	27.42	39.35	54.00	14.65
7320	43.76	PK	V	34.37	6.75	25.88	59.00	74.00	15.00
7320	37.68	AV	V	34.37	6.75	25.88	52.92	54.00	1.08*
9760	30.12	PK	V	36.32	8.62	27.21	47.85	74.00	26.15
9760	18.25	AV	V	36.32	8.62	27.21	35.98	54.00	18.02
2035	34.92	PK	V	24.69	3.28	27.45	35.44	74.00	38.56
2035	22.51	AV	V	24.69	3.28	27.45	23.03	54.00	30.97
1990	34.26	PK	V	24.58	3.11	27.48	34.47	74.00	39.53
1990	22.01	AV	V	24.58	3.11	27.48	22.22	54.00	31.78
250.7	36.1	QP	V	12.16	1.91	21.49	28.68	46.00	17.32

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
High Channel: 2475 MHz									
2475	74.38	PK	H	25.84	3.70	0.00	103.92	N/A	N/A
2475	72.64	AV	H	25.84	3.70	0.00	102.18	N/A	N/A
2475	76.58	PK	V	25.84	3.70	0.00	106.12	N/A	N/A
2475	74.41	AV	V	25.84	3.70	0.00	103.95	N/A	N/A
2483.5	31.4	PK	V	25.86	3.67	0.00	60.93	74.00	13.07
2483.5	22.73	AV	V	25.86	3.67	0.00	52.26	54.00	1.74 *
4950	35.61	PK	V	30.97	5.37	27.43	44.52	74.00	29.48
4950	25.65	AV	V	30.97	5.37	27.43	34.56	54.00	19.44
7425	40.08	PK	V	34.62	6.87	25.93	55.64	74.00	18.36
7425	34.66	AV	V	34.62	6.87	25.93	50.22	54.00	3.78 *
9900	30.8	PK	V	36.66	8.69	26.74	49.41	74.00	24.59
9900	18.68	AV	V	36.66	8.69	26.74	37.29	54.00	16.71
4365	34.25	PK	V	29.83	5.00	26.92	42.16	74.00	31.84
4365	22.29	AV	V	29.83	5.00	26.92	30.20	54.00	23.80
250.7	36.8	QP	V	12.16	1.91	21.49	29.38	46.00	16.62
High Channel: 2480 MHz									
2480	60.69	PK	H	25.85	3.68	0.00	90.22	N/A	N/A
2480	58.66	AV	H	25.85	3.68	0.00	88.19	N/A	N/A
2480	62.61	PK	V	25.85	3.68	0.00	92.14	N/A	N/A
2480	60.64	AV	V	25.85	3.68	0.00	90.17	N/A	N/A
2483.5	32.36	PK	V	25.86	3.67	0.00	61.89	74.00	12.11
2483.5	24.32	AV	V	25.86	3.67	0.00	53.85	54.00	0.15 *
4960	32.72	PK	V	31.00	5.34	27.43	41.63	74.00	32.37
4960	20.88	AV	V	31.00	5.34	27.43	29.79	54.00	24.21
7440	31.04	PK	V	34.66	6.89	25.97	46.62	74.00	27.38
7440	19.09	AV	V	34.66	6.89	25.97	34.67	54.00	19.33
9920	30.45	PK	V	36.71	8.71	26.66	49.21	74.00	24.79
9920	18.23	AV	V	36.71	8.71	26.66	36.99	54.00	17.01
4365	34.74	PK	V	29.83	5.00	26.92	42.65	74.00	31.35
4365	22.97	AV	V	29.83	5.00	26.92	30.88	54.00	23.12
250.7	36.3	QP	V	12.16	1.91	21.49	28.88	46.00	17.12


*within measurement uncertainty!

Conducted Spurious Emissions at Antenna Port


Low Channel-2405MHz

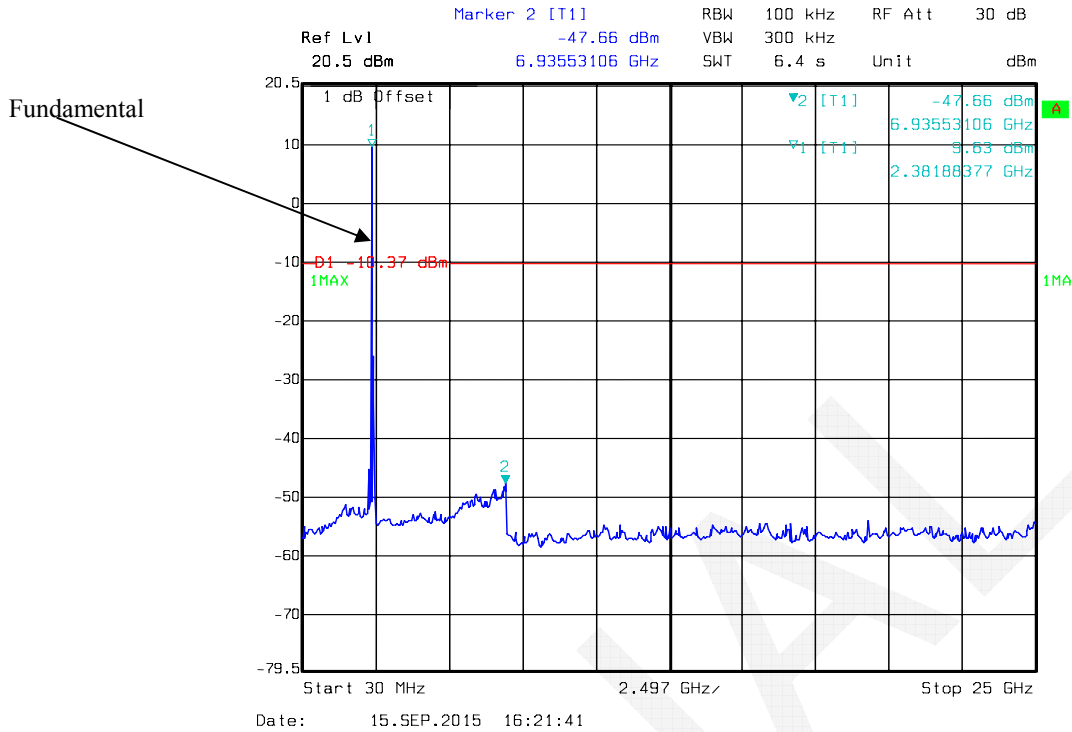


Middle Channel-2440MHz

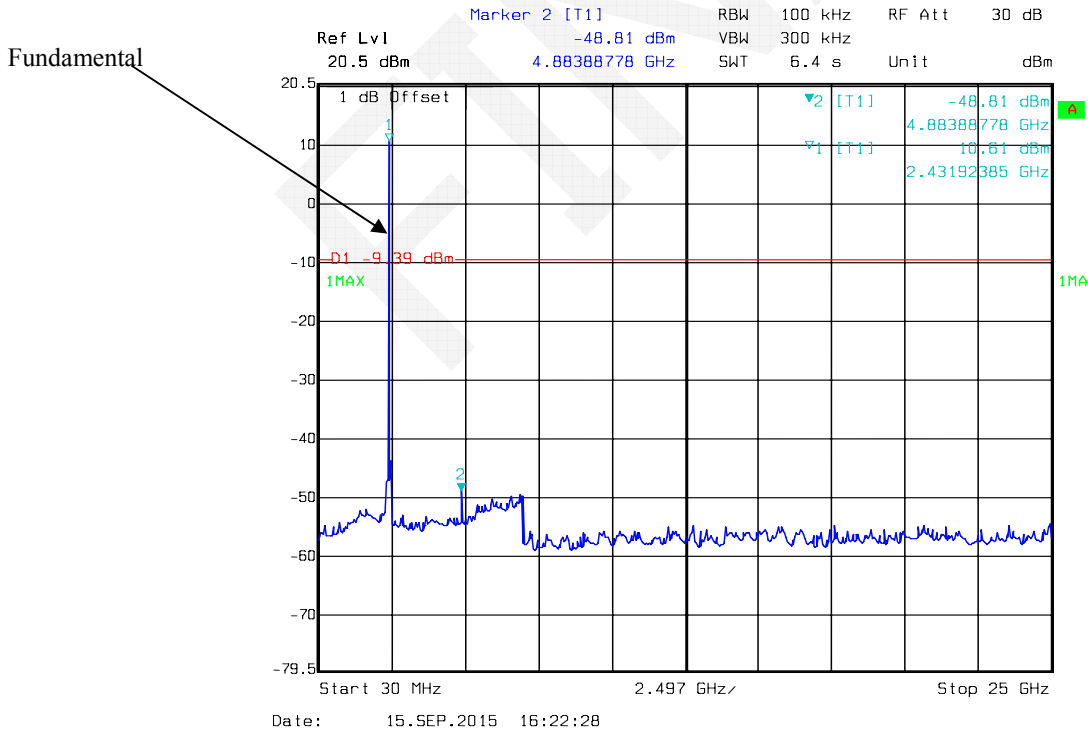

High Channel-2475MHz

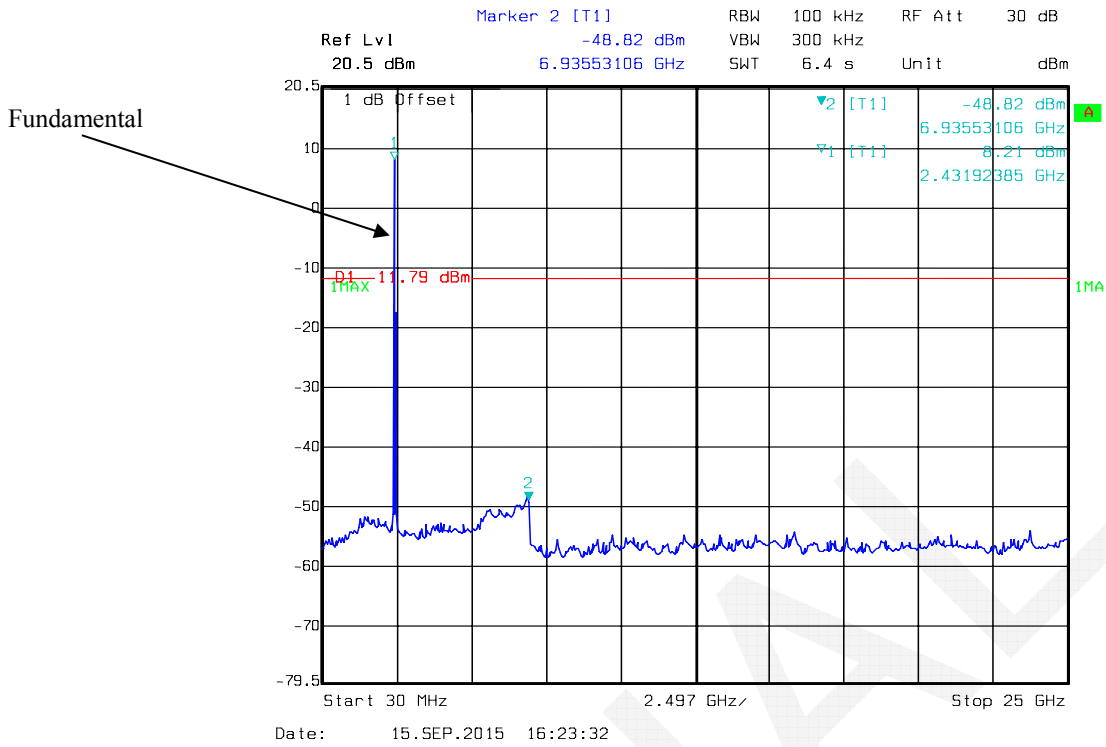

High Channel-2480MHz

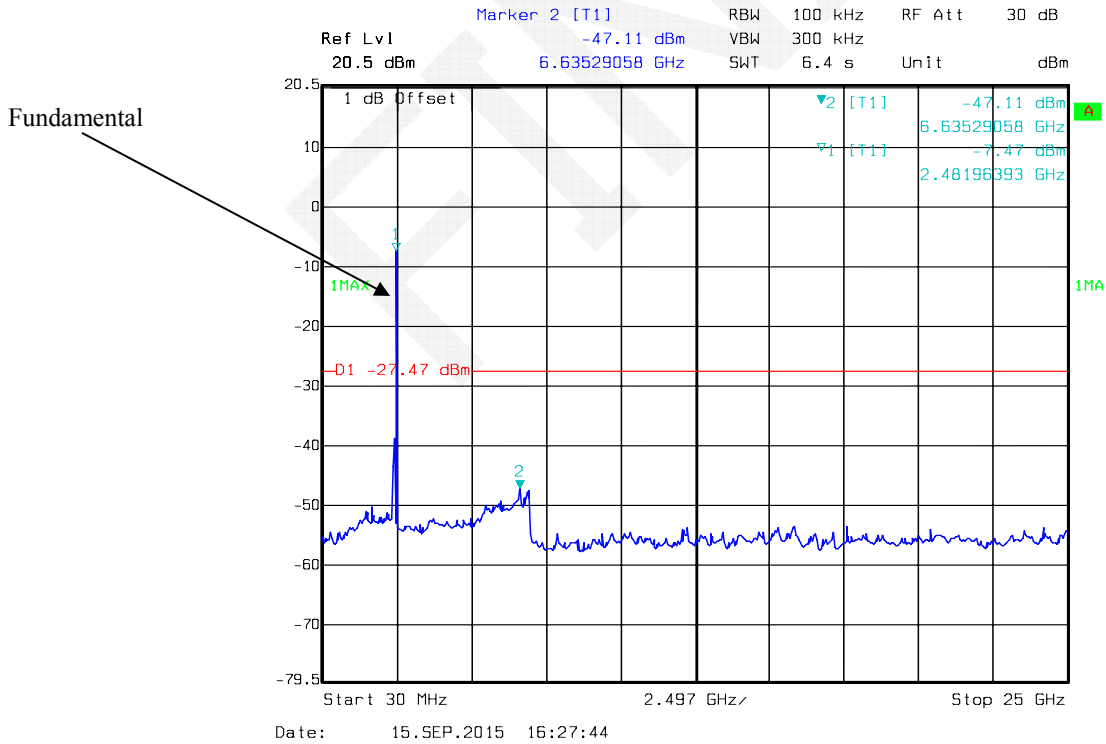

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r03 clause8.1 Option 1:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.2 °C
Relative Humidity:	52 %
ATM Pressure:	100.3 kPa


The testing was performed by Lion Xiao on 2015-09-15

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.


Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
Zigbee	Low	2405	1.610	≥0.5	Pass
	Middle	2440	1.610	≥0.5	Pass
	High	2475	1.610	≥0.5	Pass
	High	2480	1.608	≥0.5	Pass

Low Channel-2405MHz

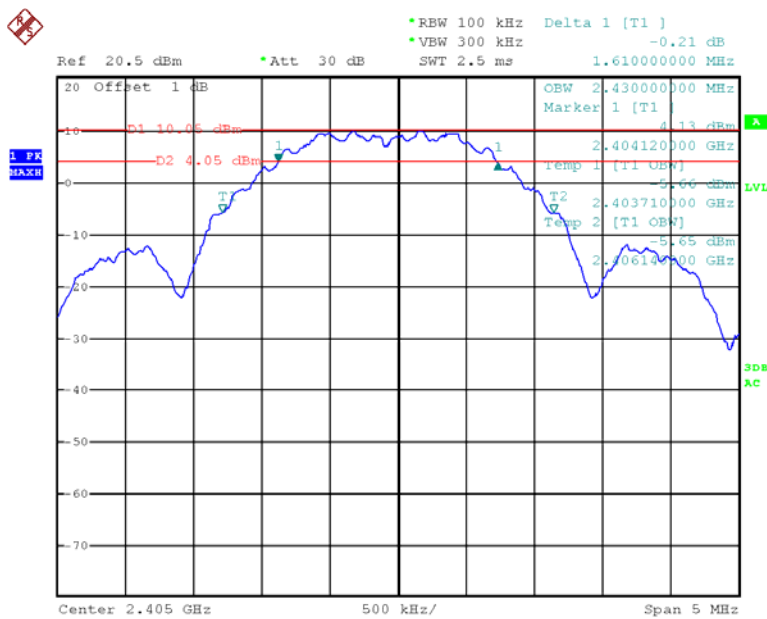


Date: 15.SEP.2015 23:38:41

Middle Channel-2440MHz

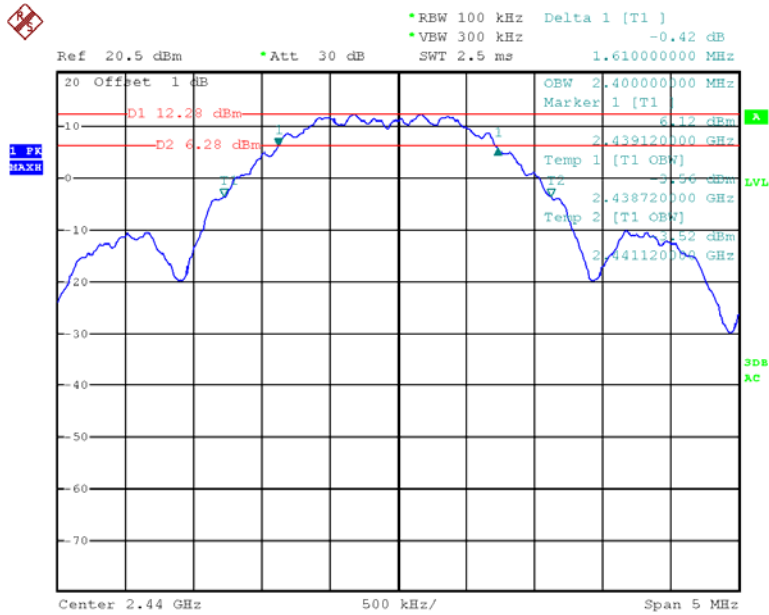


Date: 15.SEP.2015 23:45:08

High Channel-2475MHz

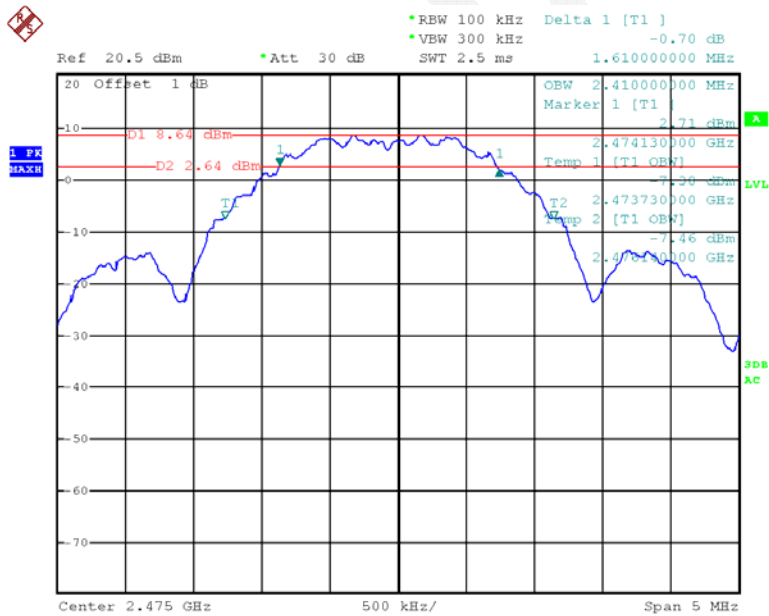

Date: 15.SEP.2015 23:50:35

High Channel-2480MHz

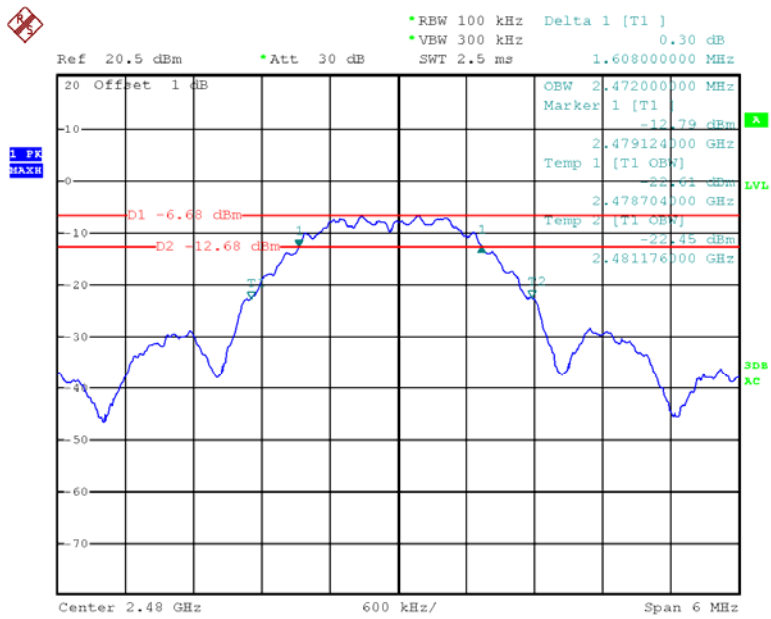

Date: 15.SEP.2015 23:54:23



FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r03

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.2 °C
Relative Humidity:	52 %
ATM Pressure:	100 .3kPa


The testing was performed by Lion Xiao on 2015-09-15

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.


Test mode	Channel	Frequency (MHz)	Max Peak Conducted Output Power (dBm)	Limit (dBm)	Result
Zigbee	Low	2405	13.87	30	PASS
	Middle	2440	15.80	30	PASS
	High	2475	12.33	30	PASS
	High	2480	-2.97	30	PASS

Please refer to the following plots

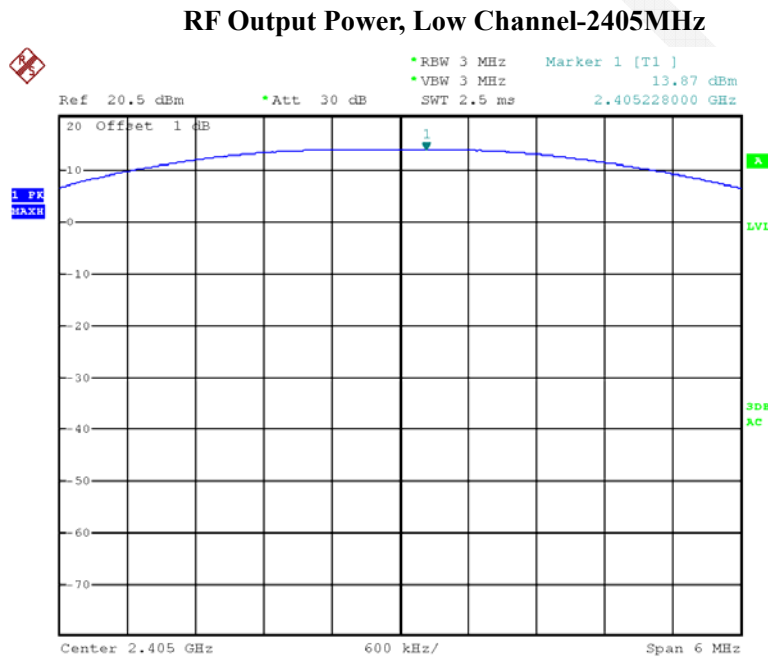


Date: 15.SEP.2015 23:37:38

RF Output Power, Middle Channel-2440MHz

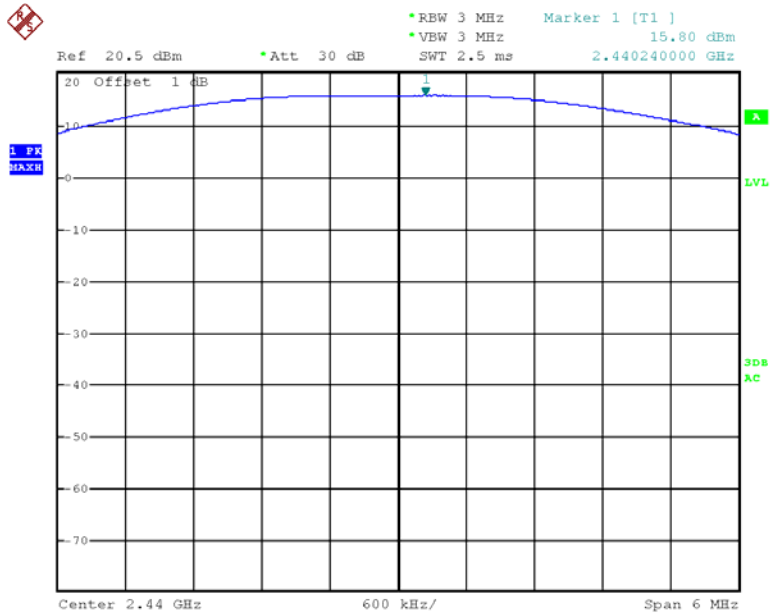


Date: 15.SEP.2015 23:44:00

RF Output Power, High Channel-2475MHz

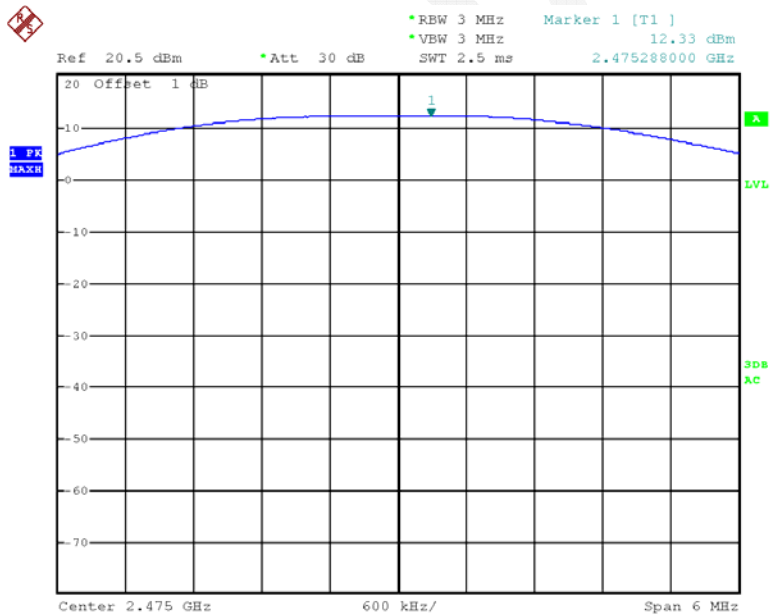

Date: 15.SEP.2015 23:49:41

RF Output Power, High Channel-2480MHz

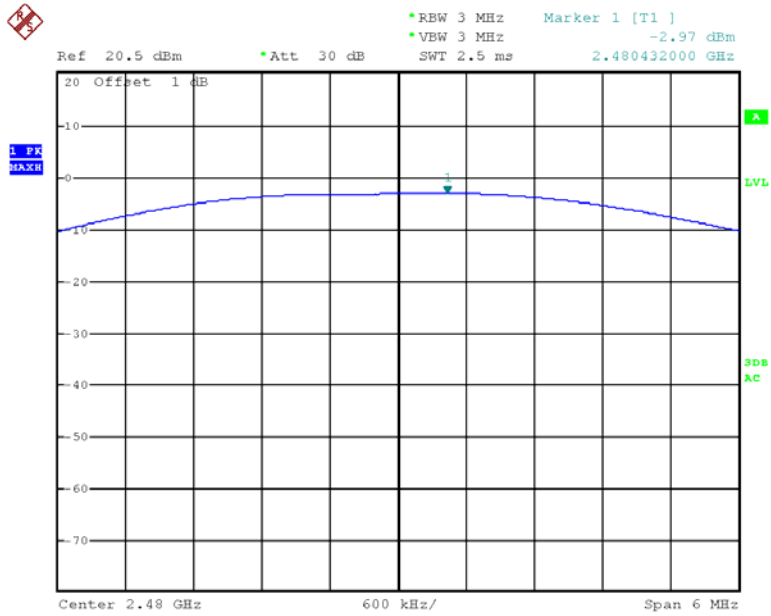

Date: 15.SEP.2015 23:53:25

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	26.2°C
Relative Humidity:	52 %
ATM Pressure:	100.3 kPa

* The testing was performed by Lion Xiao on 2015-09-15

Test mode: Transmitting


Test Result: Compliant. Please refer to following plots.

Band Edge, Left Side

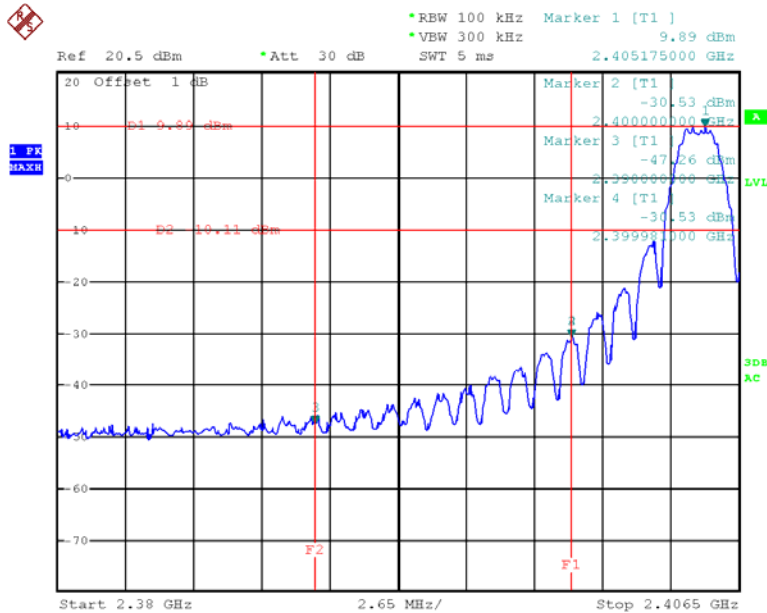


Date: 15.SEP.2015 23:41:15

Band Edge, Right Side

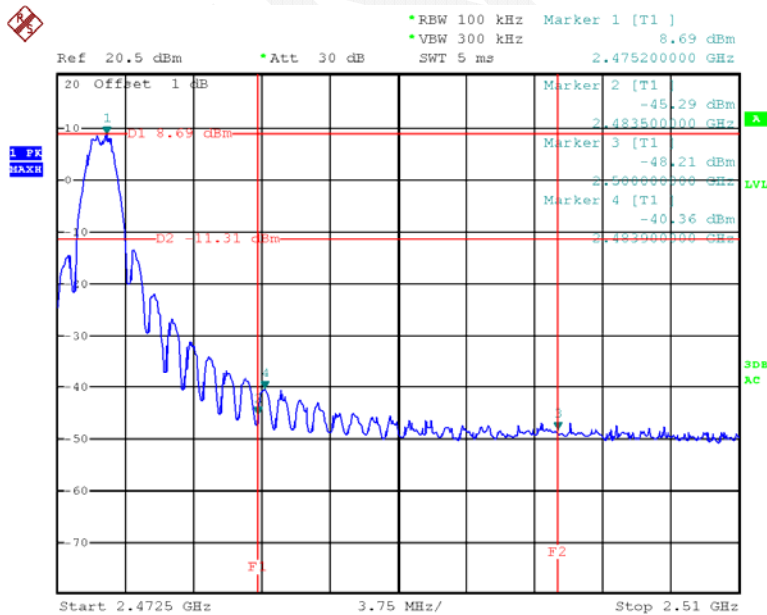

Date: 15.SEP.2015 23:51:34

Band Edge, Right Side

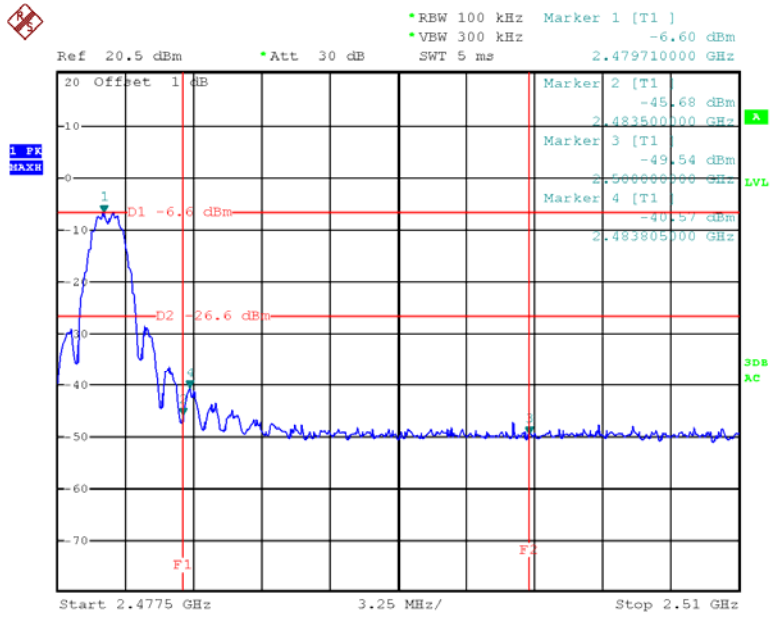

Date: 15.SEP.2015 23:55:37

FEMV

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r03 clause10.2:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.2°C
Relative Humidity:	52%
ATM Pressure:	100.3 kPa


* The testing was performed by Lion Xiao on 2015-09-15

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots


Test mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Zigbee	Low	2405	-2.01	≤8
	Middle	2440	0.04	≤8
	High	2475	-3.46	≤8
	High	2480	-17.67	≤8

Power Spectral Density, Low Channel-2405MHz

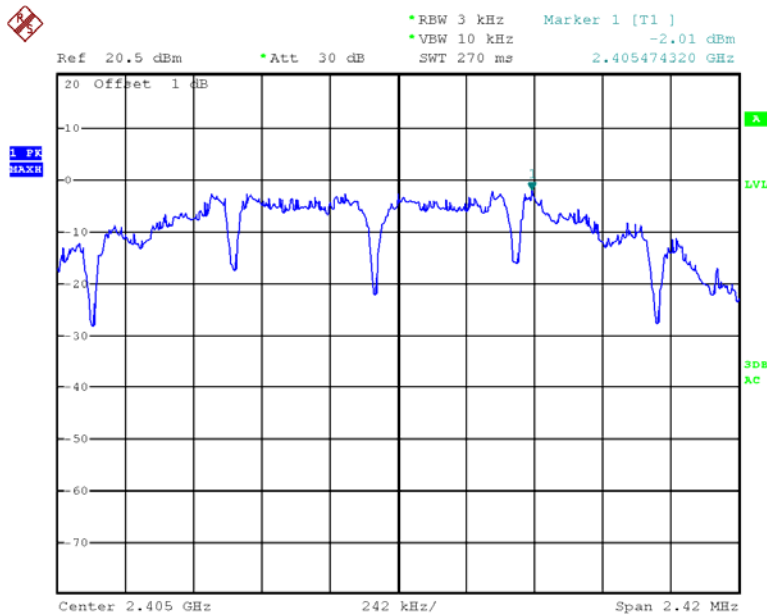


Date: 15.SEP.2015 23:43:14

Power Spectral Density, Middle Channel-2440MHz

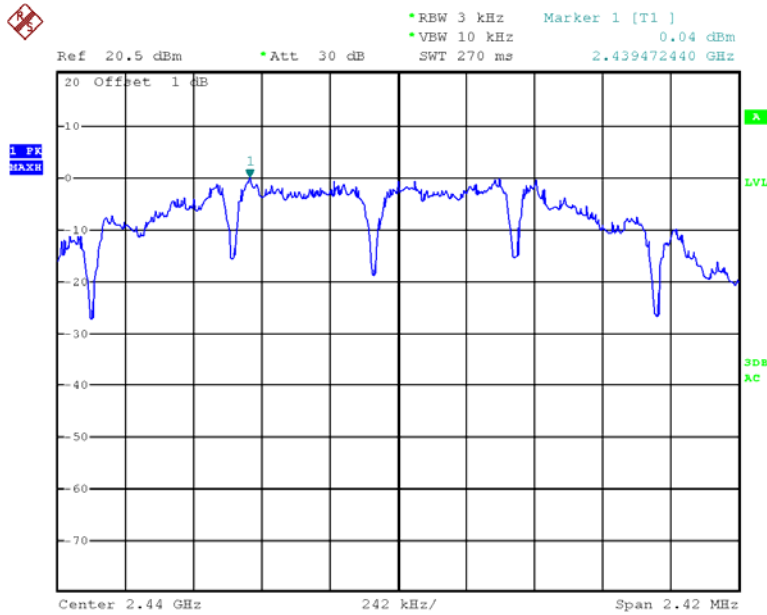


Date: 15.SEP.2015 23:47:12

Power Spectral Density, High Channel-2475MHz

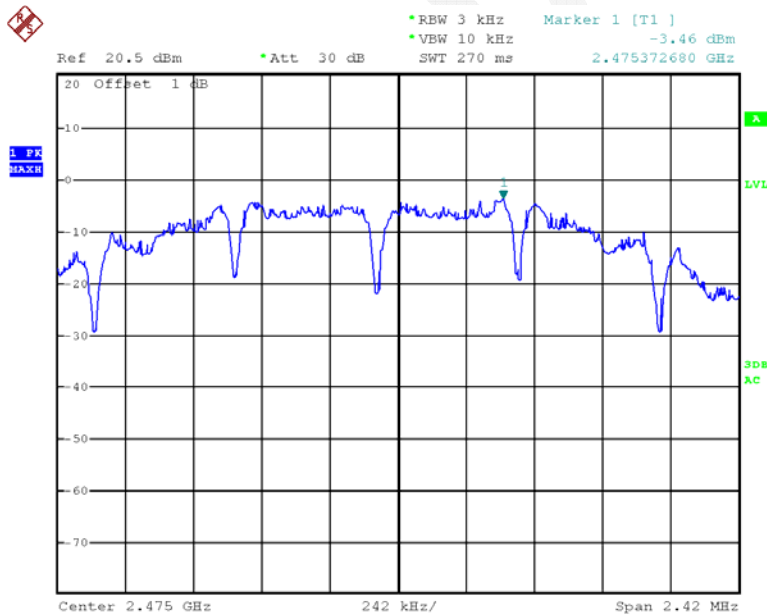

Date: 15.SEP.2015 23:52:32

Power Spectral Density, High Channel-2480MHz

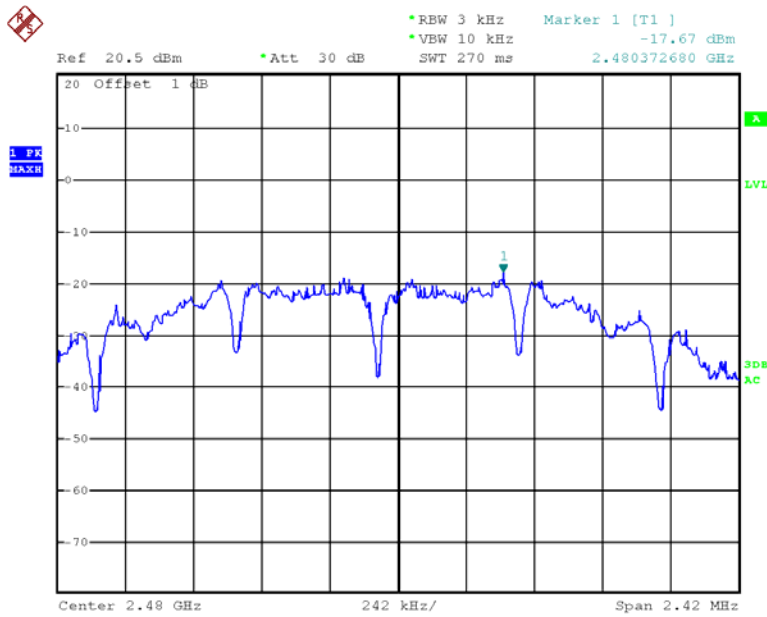

Date: 15.SEP.2015 23:56:31



DECLARATION LETTER

NANOGRID LIMITED

Declaration of Alteration

To Whom It May Concern,

We, NANOGRID LIMITED, hereby declare that the following models are the same expects the color and pattern on the external surface of product's cover.

Details as below:

Products Description	Name	Smarter Hub	
	Brand	Nanoleaf	
	Project No.	RDG150818050	
Differences Description			
Testing Model	Multiple Model	Difference	Details
NL14-0001MN	NL14-0001XX	<ol style="list-style-type: none"> Color of external surface on the cover Pattern of external surface on the cover 	<ol style="list-style-type: none"> The 1st "X" denotes the color of external surface, may be replaced by one character from A - Z. The 2nd "X" denotes the pattern of external surface, may be replaced by one character from A - Z.

Besides the differences in the table above, we declare the products are identical. We guarantee all the information provided above are true, and notice that we'll bear all the consequences caused by any false information or concealing.

Best Regards,

Signature: *Charleston Cheng 4/3/2015*

Print Name: Charleston Cheng

Title: Quality & Production Manager

Company name: NANOGRID LIMITED
 Mail: charleston@nanoleaf.me

Tel: +86 13392849895

QPDG004R.12 Version1.0 (20140717)

*******END OF REPORT*******