

APPLICATION CERTIFICATION FCC Part 15C
On Behalf of
Blueair AB

Indoor Air Quality Sensor
Model No.: AAware

FCC ID: 2AEX3-AAWARE

Prepared for : Blueair AB
Address : Danderydsgatan 11, 114 26 Stockholm, Sweden
Prepared by : ACCURATE TECHNOLOGY CO., LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: +86-755-26503290
Fax: +86-755-26503396

Report No. : ATE20151334
Date of Test : Jun 17, 2015-July 09, 2015
Date of Report : July 09, 2015

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels.....	6
1.3. Accessory and Auxiliary Equipment	6
1.4. Description of Test Facility	6
1.5. Measurement Uncertainty.....	7
2. MEASURING DEVICE AND TEST EQUIPMENT	8
3. OPERATION OF EUT DURING TESTING	9
3.1. Operating Mode	9
3.2. Configuration and peripherals	9
4. TEST PROCEDURES AND RESULTS	10
5. POWER LINE CONDUCTED MEASUREMENT	11
5.1. Block Diagram of Test Setup.....	11
5.2. Power Line Conducted Emission Measurement Limits.....	11
5.3. Configuration of EUT on Measurement	11
5.4. Operating Condition of EUT	11
5.5. Test Procedure	12
5.6. Power Line Conducted Emission Measurement Results	13
6. 6DB&20DB BANDWIDTH MEASUREMENT	19
6.1. Block Diagram of Test Setup.....	19
6.2. The Requirement For Section 15.247(a)(2).....	19
6.3. EUT Configuration on Measurement	19
6.4. Operating Condition of EUT	19
6.5. Test Procedure	19
6.6. Test Result	20
7. MAXIMUM CONDUCTED (AVERAGE) OUTPUT POWER	33
7.1. Block Diagram of Test Setup.....	33
7.2. The Requirement For Section 15.247(b)(3).....	33
7.3. EUT Configuration on Measurement	33
7.4. Operating Condition of EUT	33
7.5. Test Procedure	33
7.6. Test Result	34
8. POWER SPECTRAL DENSITY MEASUREMENT.....	41
8.1. Block Diagram of Test Setup.....	41
8.2. The Requirement For Section 15.247(e).....	41
8.3. EUT Configuration on Measurement	41
8.4. Operating Condition of EUT	41
8.5. Test Procedure	41
8.6. Test Result	42
9. BAND EDGE COMPLIANCE TEST	49
9.1. Block Diagram of Test Setup.....	49
9.2. The Requirement For Section 15.247(d)	49

- 9.3. EUT Configuration on Measurement49
- 9.4. Operating Condition of EUT49
- 9.5. Test Procedure49
- 9.6. Test Result50
- 10. RADIATED SPURIOUS EMISSION TEST72**
 - 10.1. Block Diagram of Test Setup.....72
 - 10.2. The Limit For Section 15.247(d)73
 - 10.3. Restricted bands of operation74
 - 10.4. Configuration of EUT on Measurement74
 - 10.5. Operating Condition of EUT75
 - 10.6. Test Procedure75
 - 10.7. The Field Strength of Radiation Emission Measurement Results76
- 11. CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST107**
 - 11.1. Block Diagram of Test Setup.....107
 - 11.2. The Requirement For Section 15.247(d)107
 - 11.3. EUT Configuration on Measurement107
 - 11.4. Operating Condition of EUT107
 - 11.5. Test Procedure108
 - 11.6. Test Result108
- 12. ANTENNA REQUIREMENT.....115**
 - 12.1. The Requirement115
 - 12.2. Antenna Construction115

Test Report Certification

Applicant : Blueair AB
Manufacturer : Shenzhen Mixwell Tech.Co.,Ltd
EUT Description : Indoor Air Quality Sensor
(A) MODEL NO.: AAware
(B) Trade Name.: Aware
(C) POWER SUPPLY: AC 120V/60Hz (Powered by Adapter)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2013

The EUT was tested according to DTS test procedure of Jun 05, 2014 KDB558074 D01 DTS Meas Guidance v03r02 for compliance to FCC 47CFR 15.247 requirements

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : Jun 17, 2015-July 09, 2015

Prepared by : Tim Zhang
(Tim.zhang, Engineer)

Approved & Authorized Signer : Sean Liu
(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	Indoor Air Quality Sensor
Model Number	:	AAware
Frequency Range	:	802.11b/g/n(20MHz): 2412-2462MHz 802.11n(40MHz): 2422-2452MHz
Number of Channels	:	802.11b/g/n (20MHz):11 802.11n (40MHz): 7
Antenna Gain	:	2dBi
Type of Antenna	:	Integral Antenna
Power Supply	:	AC 120V/60Hz (Powered by Adapter)
Adapter information	:	Model:GQ07-050100-AU Input:100-240V~50/60Hz 0.3A Max Output:5.0V 1.0A
Data Rate	:	802.11b: 11, 5.5, 2, 1 Mbps 802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps 802.11n: up to 150Mbps
Modulation Type	:	CCK, OFDM
Applicant	:	Blueair AB
Address	:	Danderydsgatan 11, 114 26 Stockholm, Sweden
Manufacturer	:	Shenzhen Mixwell Tech.Co.,Ltd
Address	:	3#F, the Second Jinmeiwei Industrial Park, Baoan High-tech Park, HuanGuanNan Road, GuanLan, Shenzhen, China
Date of sample received	:	Jun 17, 2015
Date of Test	:	Jun 17, 2015-July 09, 2015

1.2. Carrier Frequency of Channels

802.11b, 802.11g, 802.11n (20MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437	---	---

802.11n (40MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
03	2422	09	2452
04	2427	---	---
05	2432	---	---
06	2437	---	---

1.3. Accessory and Auxiliary Equipment

PC
Manufacturer: LENOVO
M/N: 4290-RT8
S/N: R9-FW93G 11/08

1.4. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC
The Registration Number is 752051

Listed by Industry Canada
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee
for Laboratories
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD
Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

1.5.Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty
(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty
(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty
(Above 1GHz) = 4.06dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 11, 2015	Jan. 10, 2016
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 11, 2015	Jan. 10, 2016
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 11, 2015	Jan. 10, 2016
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 11, 2015	Jan. 10, 2016
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 15, 2015	Jan. 14, 2016
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 15, 2015	Jan. 14, 2016
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 15, 2015	Jan. 14, 2016
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 15, 2015	Jan. 14, 2016
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 11, 2015	Jan. 10, 2016
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 11, 2015	Jan. 10, 2016
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 11, 2015	Jan. 10, 2016
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 11, 2015	Jan. 10, 2016

3. OPERATION OF EUT DURING TESTING

3.1. Operating Mode

The mode is used: **1.802.11b Transmitting mode**

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

2.802.11g Transmitting mode

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

3.802.11n (20MHz) Transmitting mode

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz


4.802.11n (40MHz) Transmitting mode

Low Channel: 2422MHz

Middle Channel: 2437MHz

High Channel: 2452MHz

3.2. Configuration and peripherals

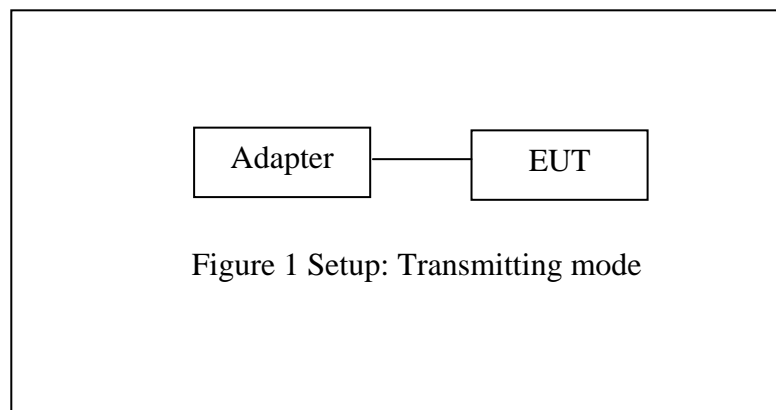


4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Power Line Conducted Emission	Compliant
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

5. POWER LINE CONDUCTED MEASUREMENT

5.1. Block Diagram of Test Setup

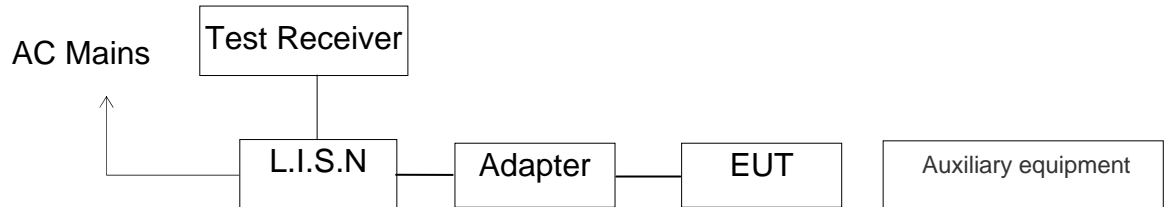

(EUT: Indoor Air Quality Sensor)

5.2. Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

NOTE1: The lower limit shall apply at the transition frequencies.
NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

5.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

5.4. Operating Condition of EUT

- 5.4.1. Setup the EUT and simulator as shown as Section 5.1.
- 5.4.2. Turn on the power of all equipment.
- 5.4.3. Let the EUT work in test mode and measure it.

5.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2014 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

5.6. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Test mode : WIFI communicating(AC 120V/60Hz)								
MEASUREMENT RESULT: "JZH006_fin"								
2015-6-22 16:51								
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	
0.150000	59.50	10.3	66	6.5	QP	L1	GND	
0.208000	51.40	10.7	63	11.9	QP	L1	GND	
4.781000	37.40	11.8	56	18.6	QP	L1	GND	
MEASUREMENT RESULT: "JZH006_fin2"								
2015-6-22 16:51								
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	
0.150000	42.80	10.3	56	13.2	AV	L1	GND	
0.210000	34.50	10.7	53	18.7	AV	L1	GND	
4.731500	24.60	11.8	46	21.4	AV	L1	GND	
MEASUREMENT RESULT: "JZH007_fin"								
2015-6-22 16:53								
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	
0.152000	56.90	10.4	66	9.0	QP	N	GND	
0.506000	47.40	11.5	56	8.6	QP	N	GND	
14.685500	33.20	11.9	60	26.8	QP	N	GND	
MEASUREMENT RESULT: "JZH007_fin2"								
2015-6-22 16:53								
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	
0.506000	36.30	11.5	46	9.7	AV	N	GND	
0.924000	28.00	11.6	46	18.0	AV	N	GND	
15.113000	23.10	11.9	50	26.9	AV	N	GND	

Test mode : WIFI communicating(AC 240V/60Hz)								
MEASUREMENT RESULT: "JZH006_fin"								
2015-6-22 16:51								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.150000	59.50	10.3	66	6.5	QP	L1	GND	
0.208000	51.40	10.7	63	11.9	QP	L1	GND	
4.781000	37.40	11.8	56	18.6	QP	L1	GND	
MEASUREMENT RESULT: "JZH006_fin2"								
2015-6-22 16:51								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.150000	42.80	10.3	56	13.2	AV	L1	GND	
0.210000	34.50	10.7	53	18.7	AV	L1	GND	
4.731500	24.60	11.8	46	21.4	AV	L1	GND	
MEASUREMENT RESULT: "JZH007_fin"								
2015-6-22 16:53								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.152000	56.90	10.4	66	9.0	QP	N	GND	
0.506000	47.40	11.5	56	8.6	QP	N	GND	
14.685500	33.20	11.9	60	26.8	QP	N	GND	
MEASUREMENT RESULT: "JZH007_fin2"								
2015-6-22 16:53								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.506000	36.30	11.5	46	9.7	AV	N	GND	
0.924000	28.00	11.6	46	18.0	AV	N	GND	
15.113000	23.10	11.9	50	26.9	AV	N	GND	

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Indoor Air Quality Sensor M/N:AAware
 Manufacturer: Mixwell
 Operating Condition: WIFI OPERATION
 Test Site: 2#Shielding Room
 Operator: star
 Test Specification: L 120V/60Hz
 Comment: Report No.:ATE20151334
 Start of Test: 2015-6-22 / 16:49:10

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN (ESH3-Z5)
 Average

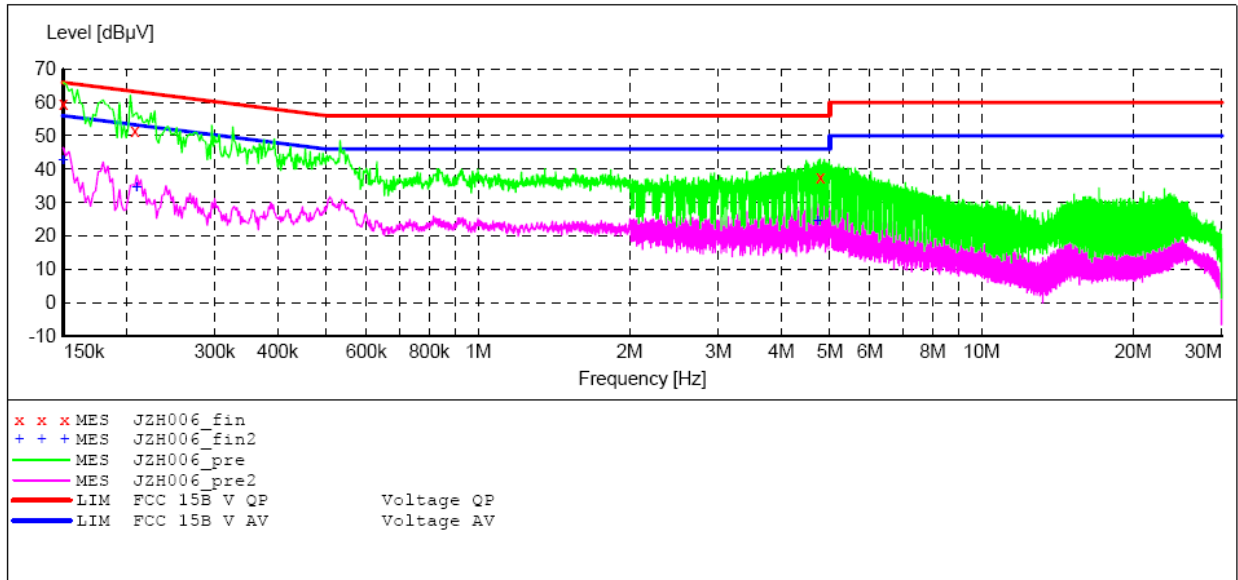

MEASUREMENT RESULT: "JZH006_fin"

2015-6-22 16:51

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	59.50	10.3	66	6.5	QP	L1	GND
0.208000	51.40	10.7	63	11.9	QP	L1	GND
4.781000	37.40	11.8	56	18.6	QP	L1	GND

MEASUREMENT RESULT: "JZH006_fin2"

2015-6-22 16:51

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	42.80	10.3	56	13.2	AV	L1	GND
0.210000	34.50	10.7	53	18.7	AV	L1	GND
4.731500	24.60	11.8	46	21.4	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Indoor Air Quality Sensor M/N:AAware
 Manufacturer: Mixwell
 Operating Condition: WIFI OPERATION
 Test Site: 2#Shielding Room
 Operator: star
 Test Specification: N 120V/60Hz
 Comment: Report No.:ATE20151334
 Start of Test: 2015-6-22 / 16:51:40

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

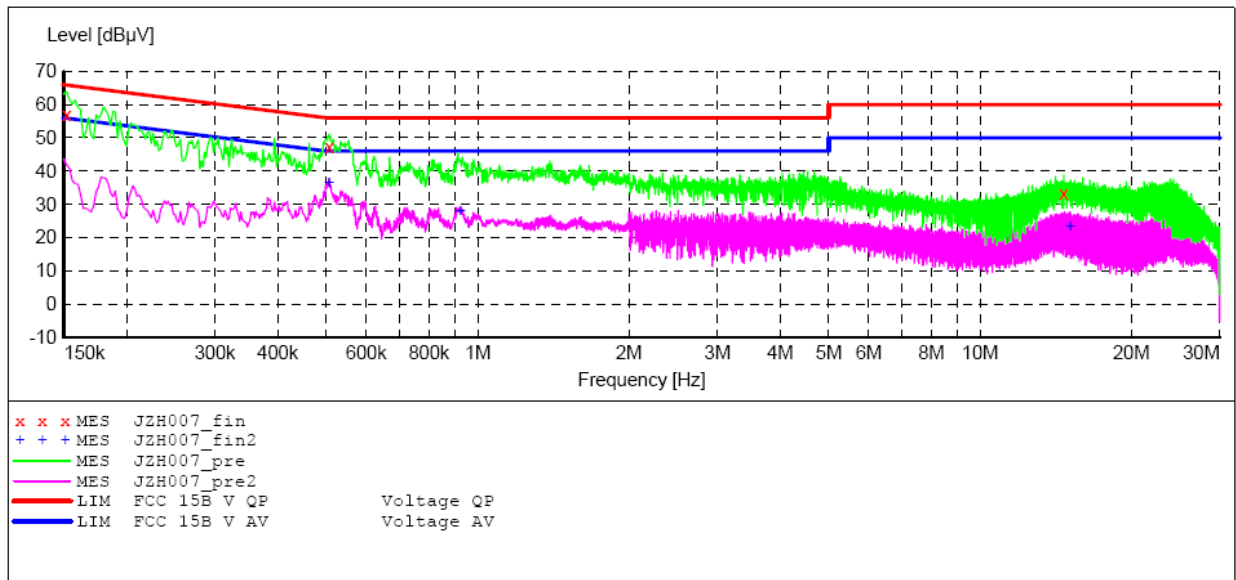

MEASUREMENT RESULT: "JZH007_fin"

2015-6-22 16:53

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.152000	56.90	10.4	66	9.0	QP	N	GND
0.506000	47.40	11.5	56	8.6	QP	N	GND
14.685500	33.20	11.9	60	26.8	QP	N	GND

MEASUREMENT RESULT: "JZH007_fin2"

2015-6-22 16:53

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.506000	36.30	11.5	46	9.7	AV	N	GND
0.924000	28.00	11.6	46	18.0	AV	N	GND
15.113000	23.10	11.9	50	26.9	AV	N	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15

EUT: Indoor Air Quality Sensor M/N:AAware
 Manufacturer: Mixwell
 Operating Condition: WIFI OPERATION
 Test Site: 2#Shielding Room
 Operator: star
 Test Specification: N 240V/60Hz
 Comment: Report No.:ATE20151334
 Start of Test: 2015-6-22 / 16:43:48

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

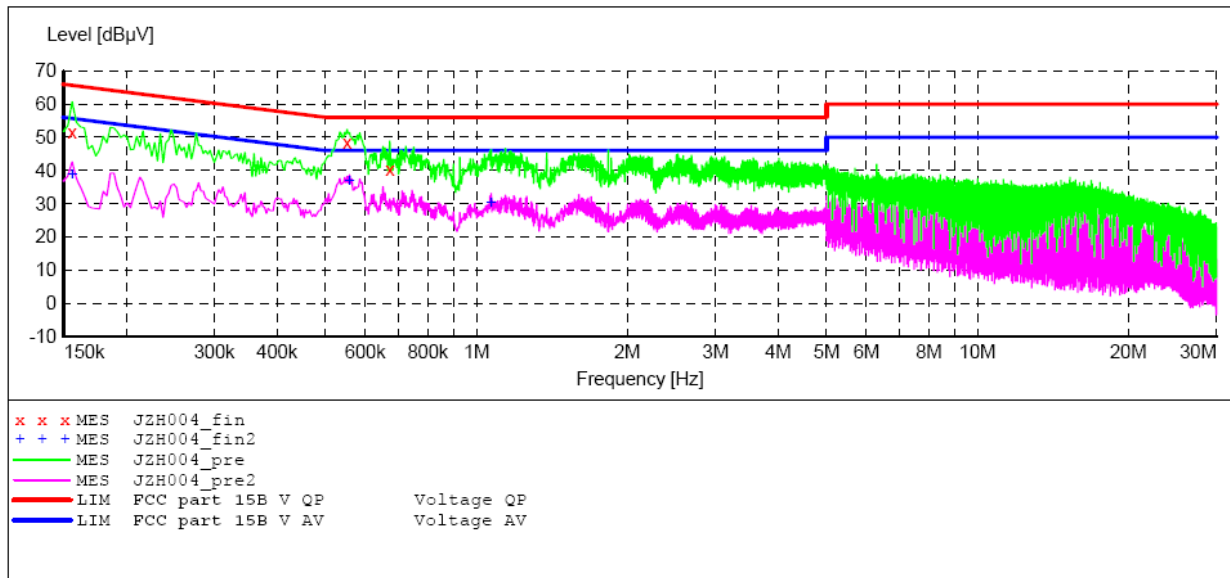

MEASUREMENT RESULT: "JZH004_fin"

2015-6-22 16:45

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.156000	51.50	10.4	66	14.2	QP	N	GND
0.552000	48.40	11.5	56	7.6	QP	N	GND
0.672000	40.40	11.5	56	15.6	QP	N	GND

MEASUREMENT RESULT: "JZH004_fin2"

2015-6-22 16:45

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.156000	38.80	10.4	56	16.9	AV	N	GND
0.558000	36.80	11.5	46	9.2	AV	N	GND
1.071000	30.10	11.6	46	15.9	AV	N	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15

EUT: Indoor Air Quality Sensor M/N:AAware
 Manufacturer: Mixwell
 Operating Condition: WIFI OPERATION
 Test Site: 2#Shielding Room
 Operator: star
 Test Specification: L 240V/60Hz
 Comment: Report No.:ATE20151334
 Start of Test: 2015-6-22 / 16:45:54

SCAN TABLE: "V 150K-30MHZ fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

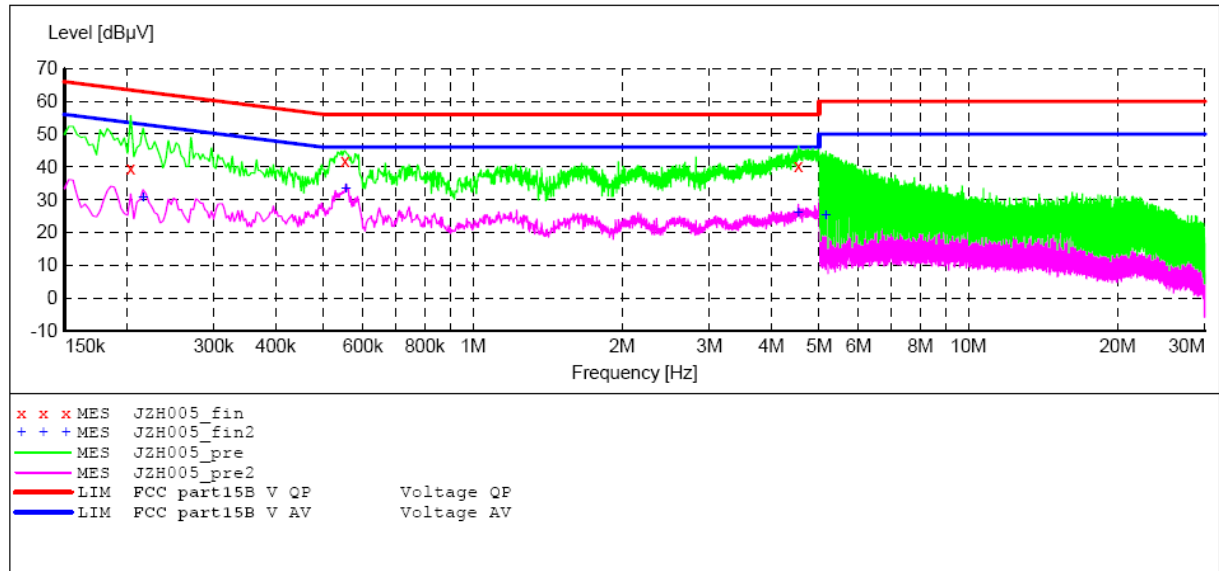

MEASUREMENT RESULT: "JZH005_fin"

2015-6-22 16:47

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.204000	39.50	10.6	63	23.9	QP	L1	GND
0.552000	42.00	11.5	56	14.0	QP	L1	GND
4.542000	40.40	11.8	56	15.6	QP	L1	GND


MEASUREMENT RESULT: "JZH005_fin2"

2015-6-22 16:47

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.216000	30.80	10.7	53	22.2	AV	L1	GND
0.555000	33.40	11.5	46	12.6	AV	L1	GND
4.542000	25.80	11.8	46	20.2	AV	L1	GND
5.157500	25.00	11.8	50	25.0	AV	L1	GND

6. 6DB&20DB BANDWIDTH MEASUREMENT

6.1. Block Diagram of Test Setup

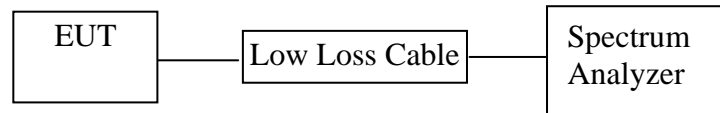

6.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 5.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

6.5. Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

20dB bandwidth

1. Set resolution bandwidth (RBW) = 1%-5% OBW.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.

3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Once the reference level is established, the equipment is conditioned with typical modulating signals to produce the worst-case (i.e., the widest) bandwidth. Unless otherwise specified for an unlicensed wireless device, measure the bandwidth at the - 20 dB levels with respect to the reference level

6.6. Test Result

The test was performed with 802.11b				
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
Low	2412	10.12	17.598	> 0.5MHz
Middle	2437	10.12	17.135	> 0.5MHz
High	2462	10.12	17.540	> 0.5MHz


The test was performed with 802.11g				
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
Low	2412	16.60	19.740	> 0.5MHz
Middle	2437	16.60	19.392	> 0.5MHz
High	2462	16.60	19.624	> 0.5MHz

The test was performed with 802.11n (Bandwidth: 20 MHz)				
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
Low	2412	17.84	20.904	> 0.5MHz
Middle	2437	17.84	20.123	> 0.5MHz
High	2462	17.84	19.472	> 0.5MHz


The test was performed with 802.11n (Bandwidth: 40 MHz)				
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
Low	2422	36.53	40.84	> 0.5MHz
Middle	2437	36.53	40.96	> 0.5MHz
High	2452	36.53	40.96	> 0.5MHz

The spectrum analyzer plots are attached as below.


6dB Bandwidth
802.11b Channel Low 2412MHz

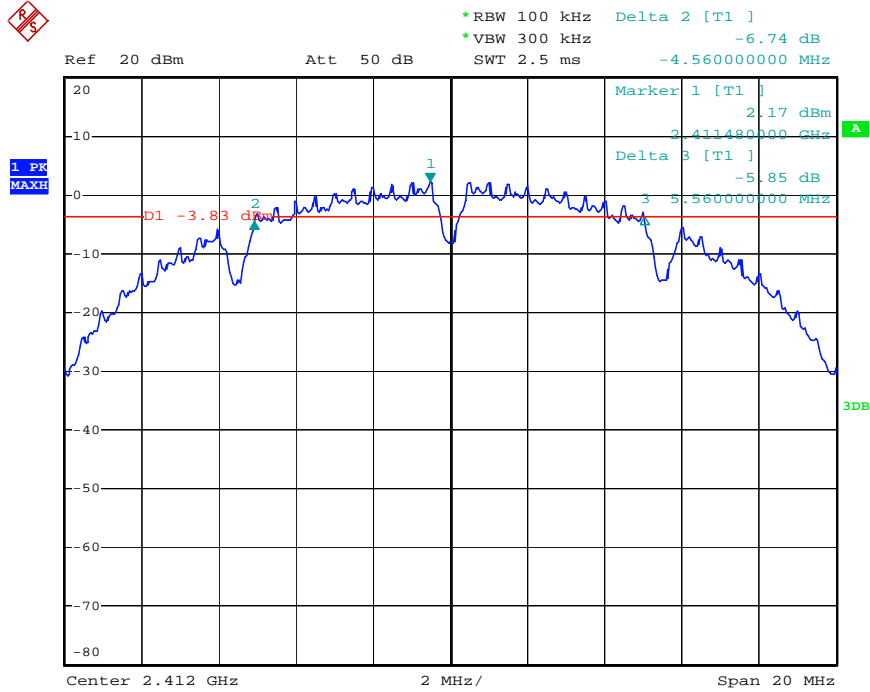


802.11b Channel Middle 2437MHz

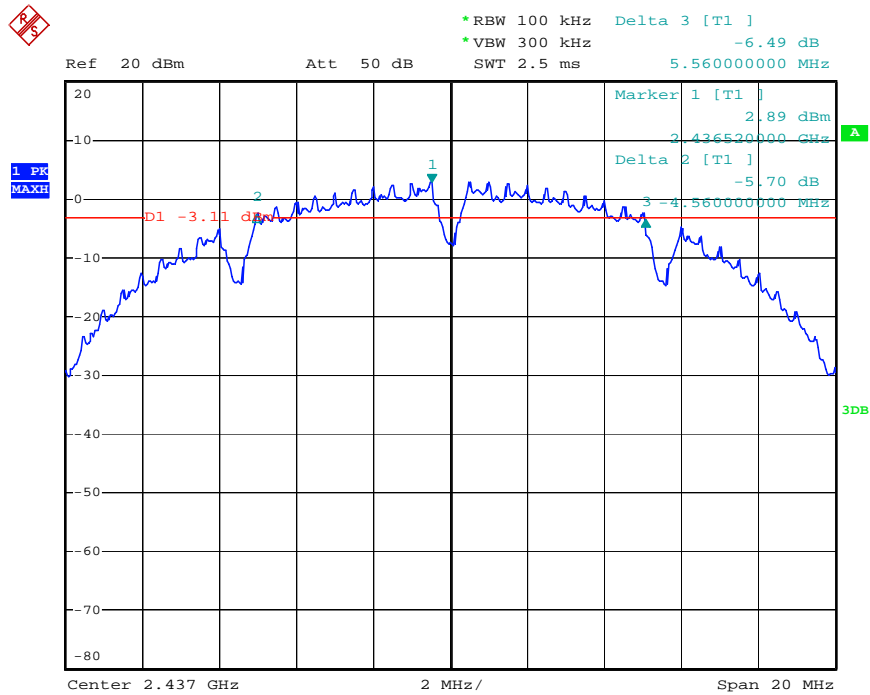


802.11b Channel High 2462MHz

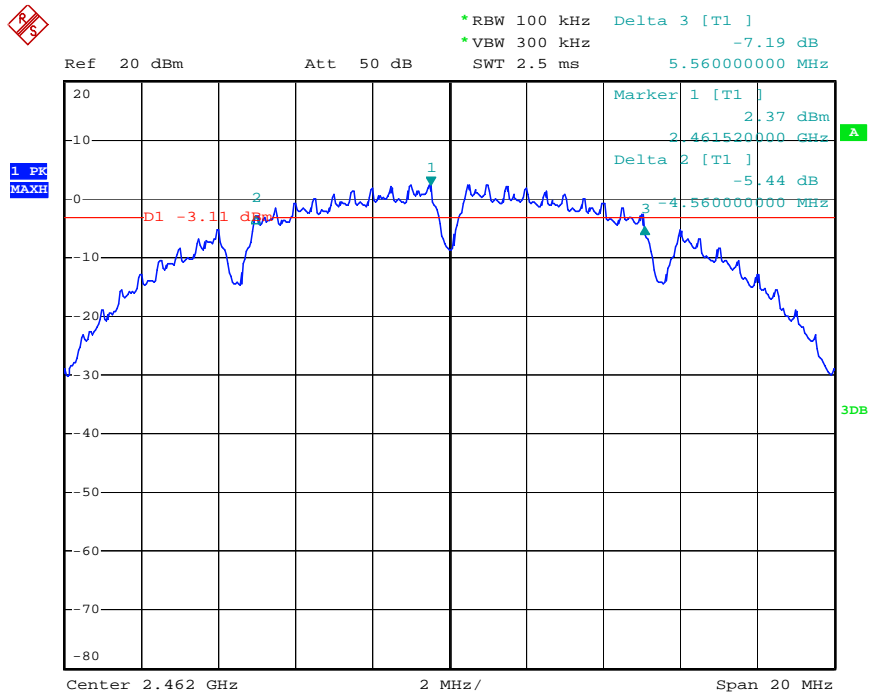


802.11g Channel Low 2412MHz

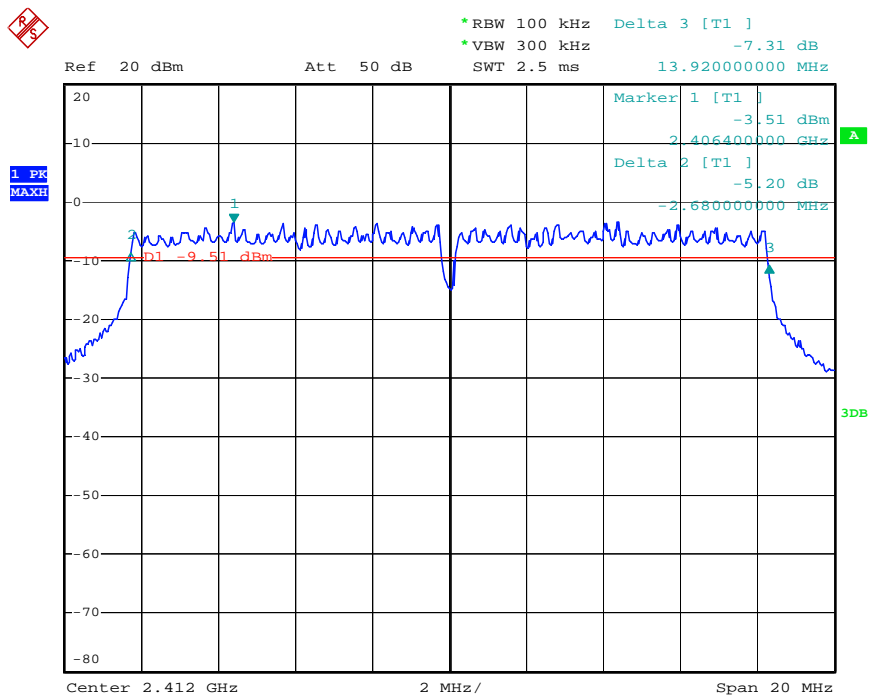


802.11g Channel Middle 2437MHz

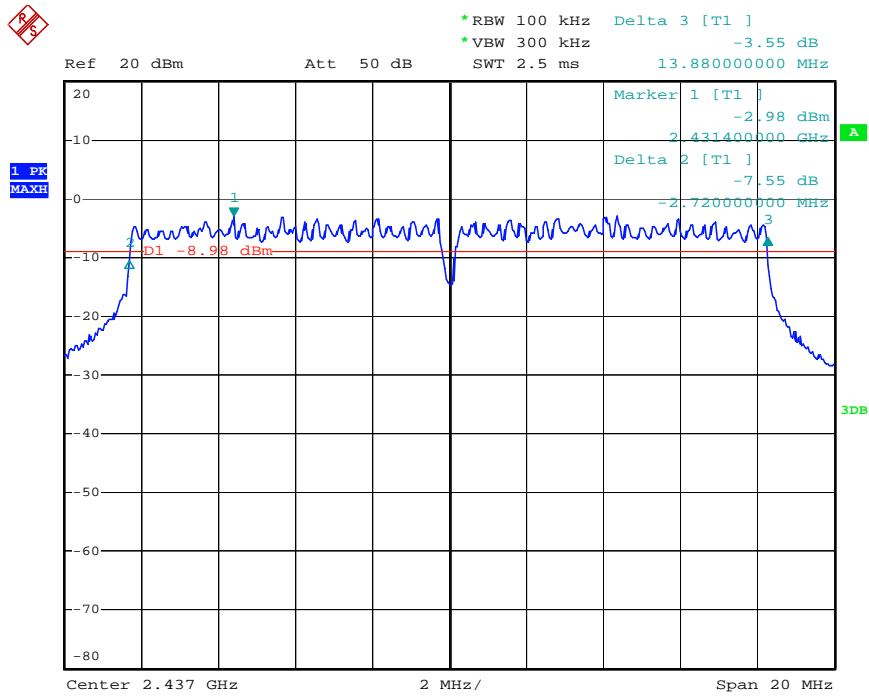


802.11g Channel High 2462MHz

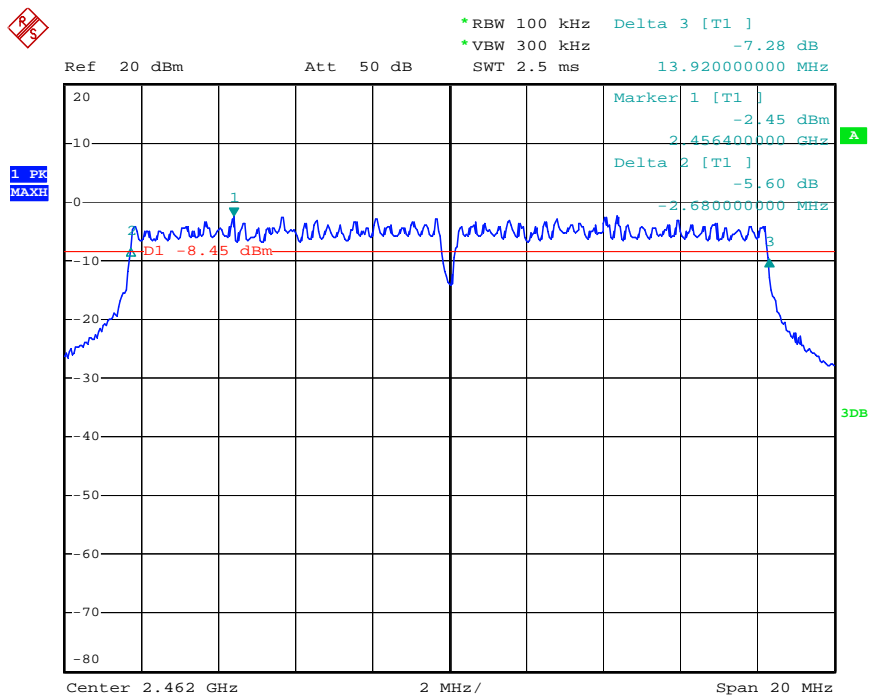


802.11n Channel Low 2412MHz (20MHz)

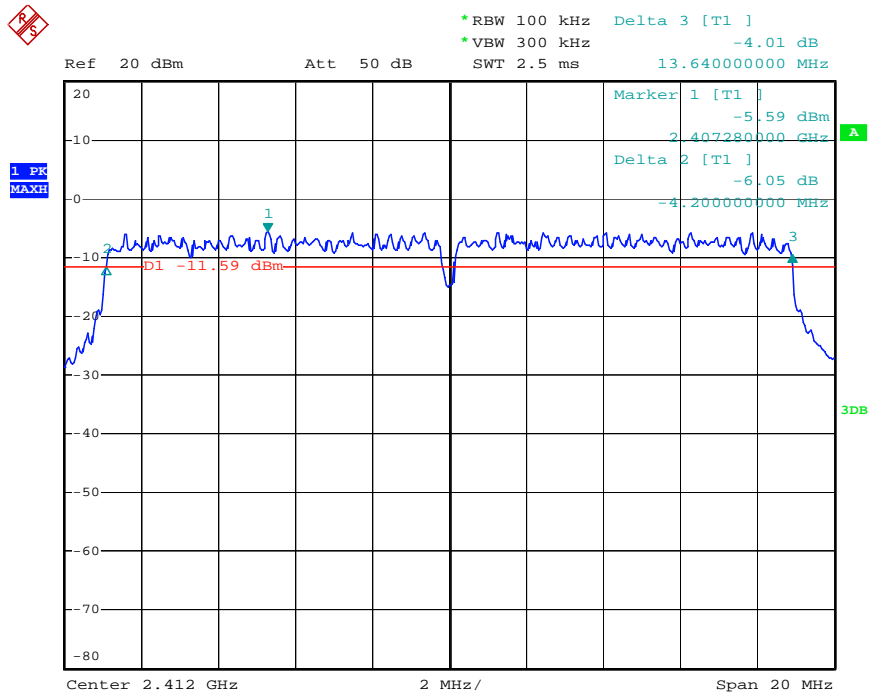


802.11n Channel Middle 2437MHz(20MHz)

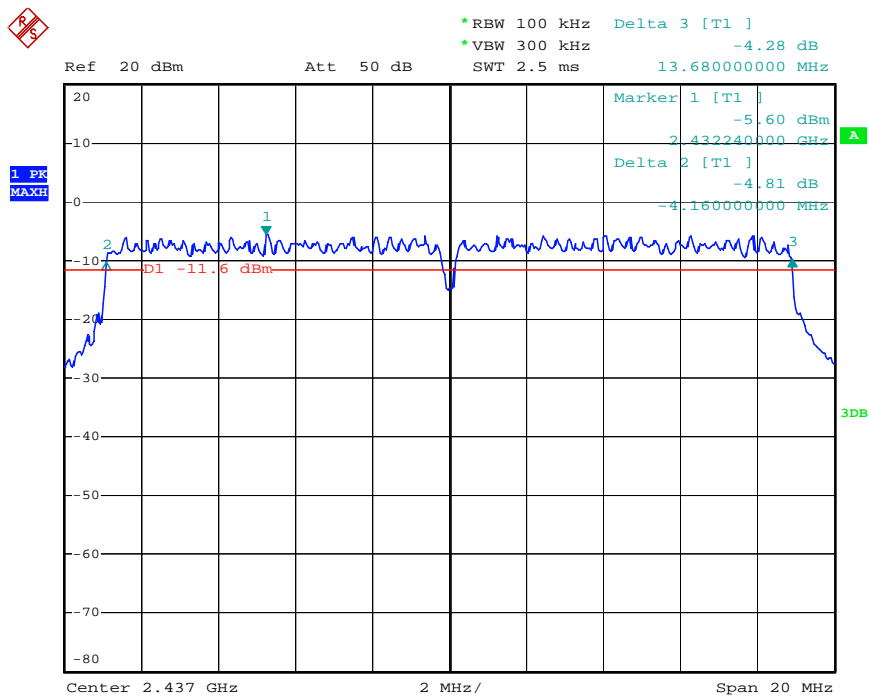


802.11n Channel High 2462MHz(20MHz)

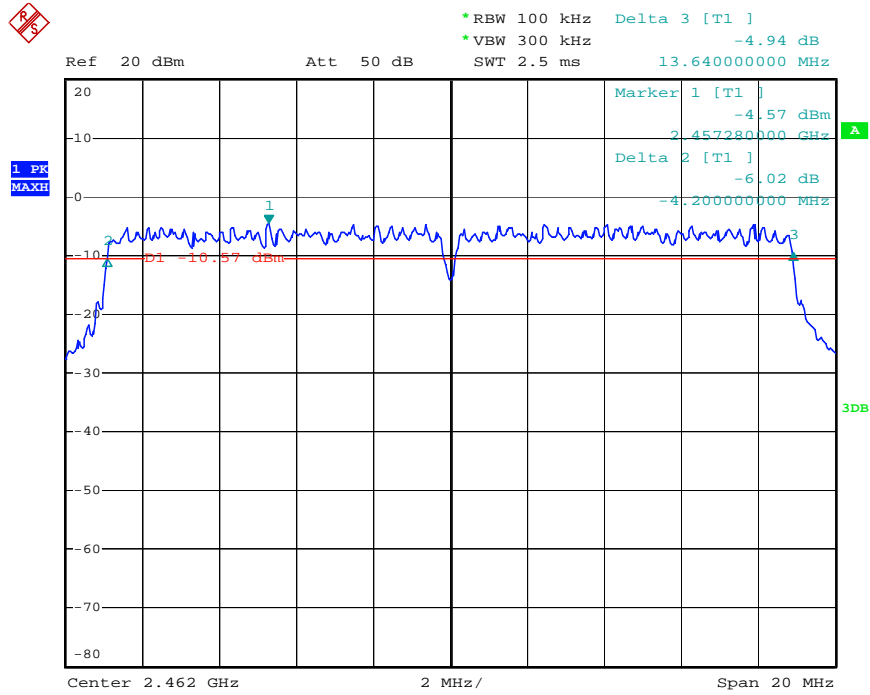


802.11n Channel Low 2422MHz (40MHz)

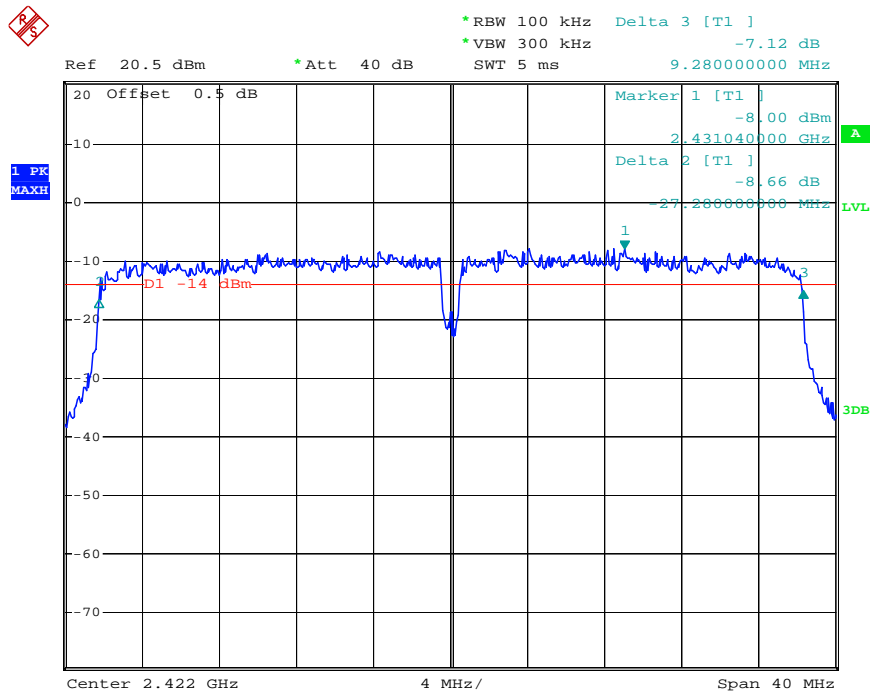


802.11n Channel Middle 2437MHz(40MHz)

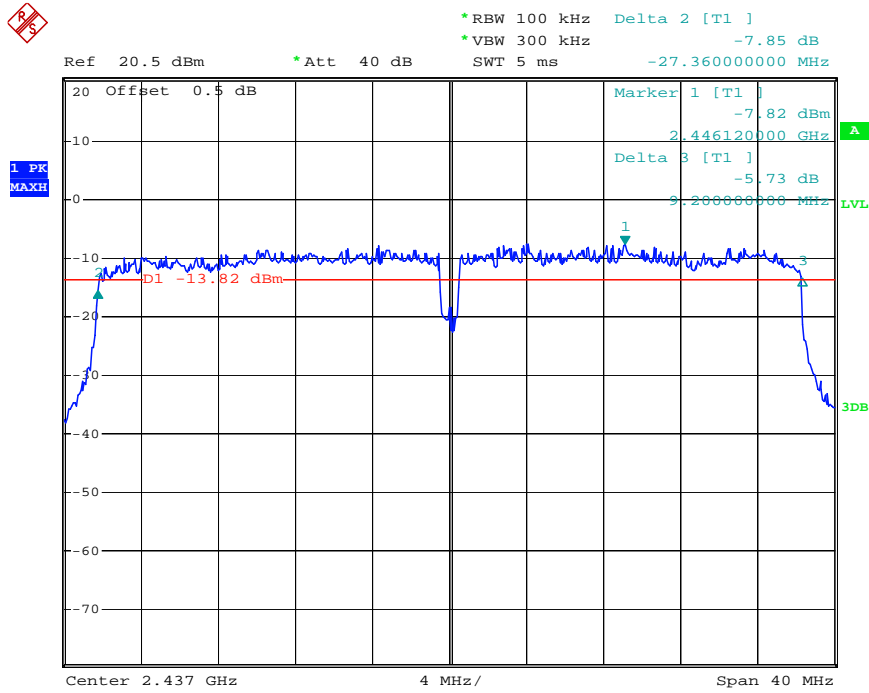


802.11n Channel High 2452MHz(40MHz)

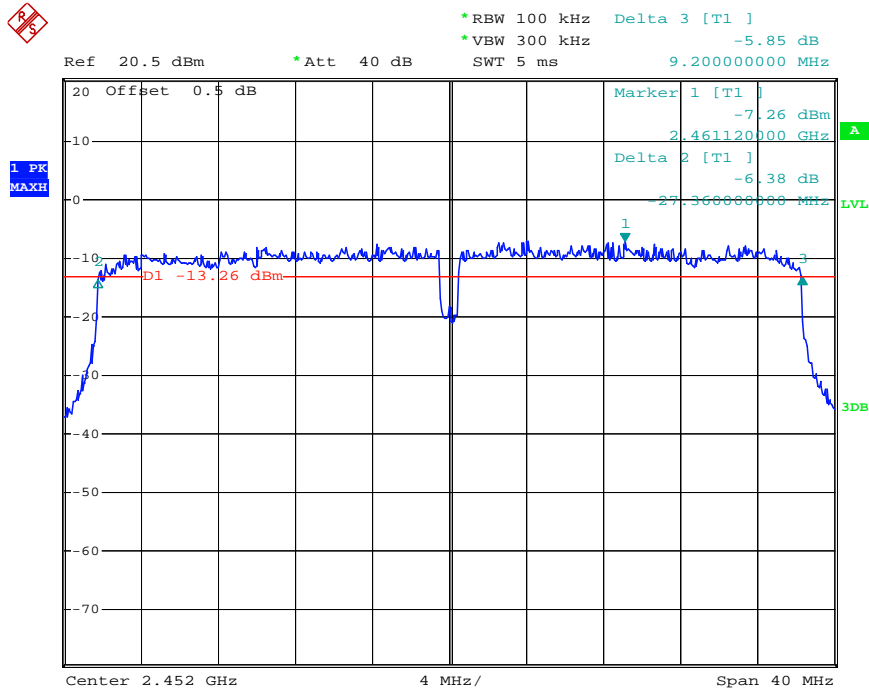


20dB Bandwidth 802.11b Channel Low 2412MHz

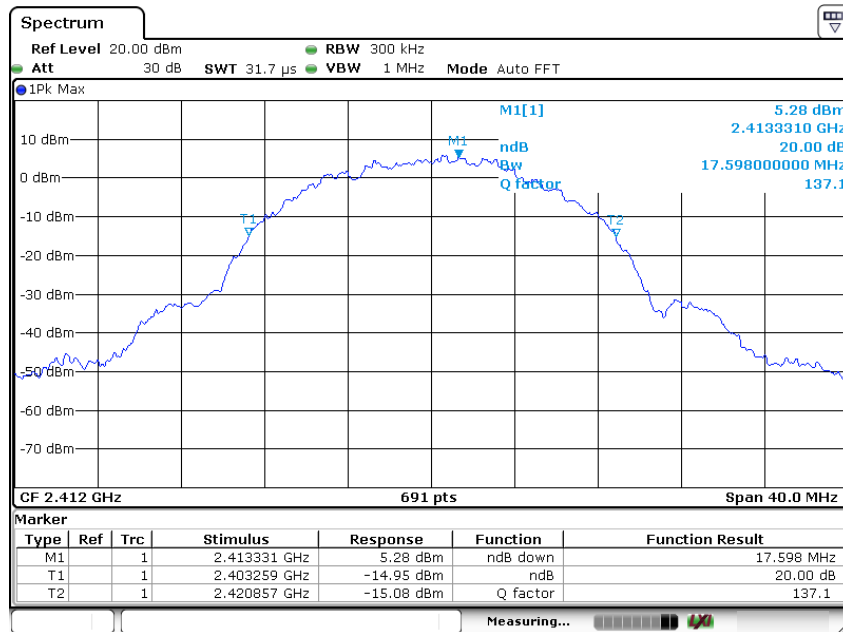


802.11b Channel Middle 2437MHz

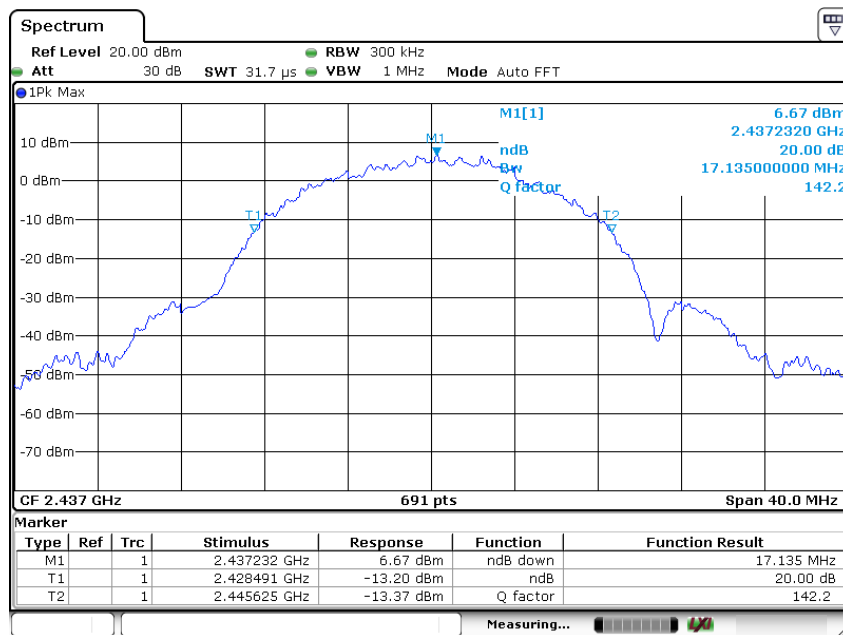


802.11b Channel High 2462MHz

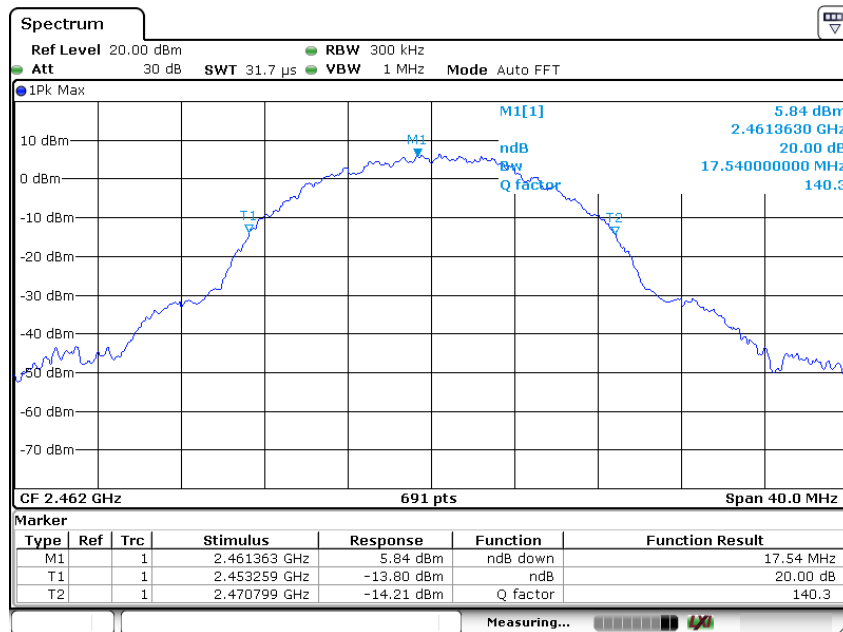


802.11g Channel Low 2412MHz

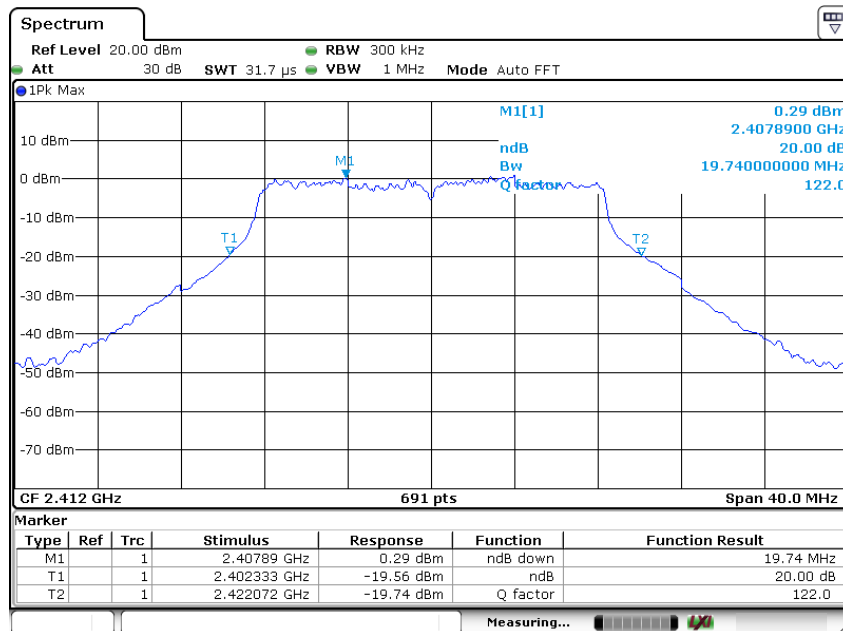


802.11g Channel Middle 2437MHz

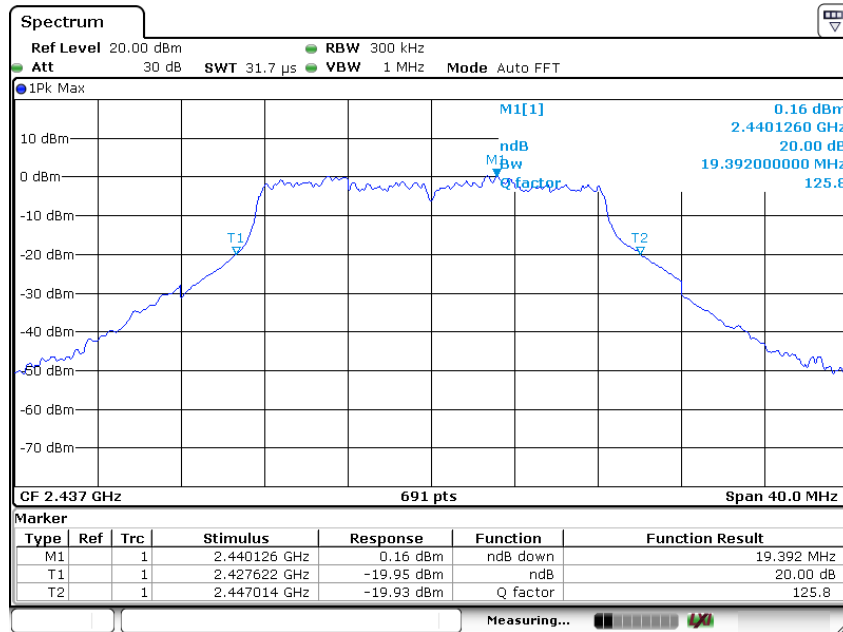


802.11g Channel High 2462MHz

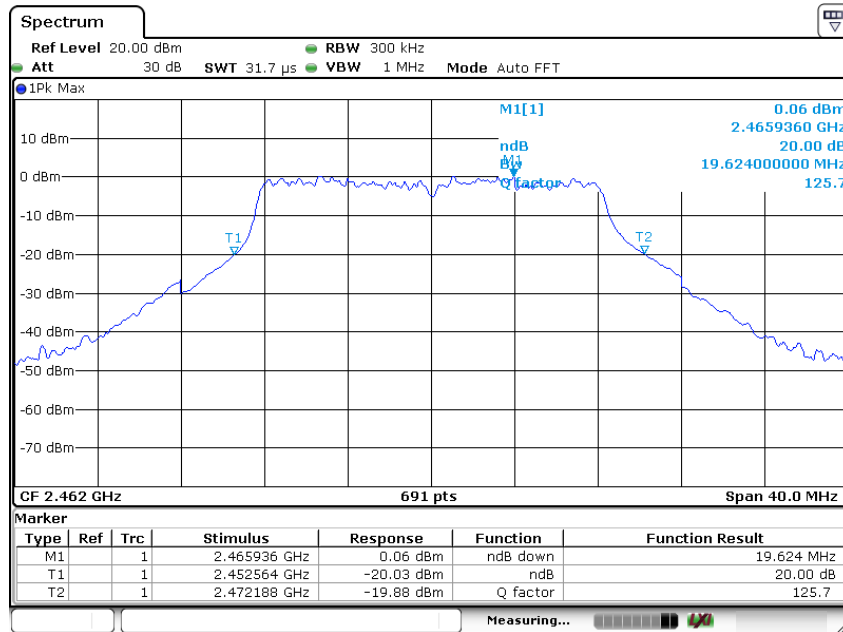


802.11n Channel Low 2412MHz (20MHz)

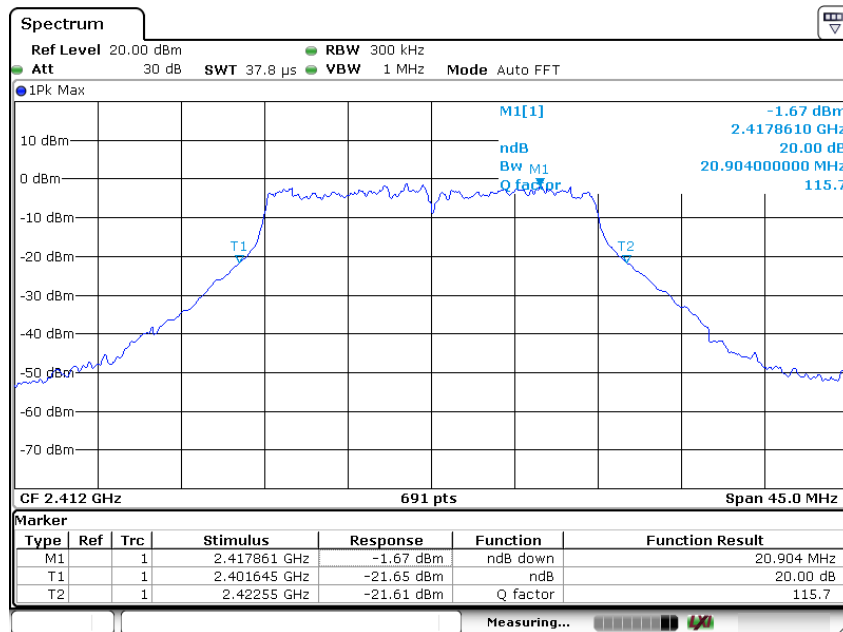


802.11n Channel Middle 2437MHz(20MHz)

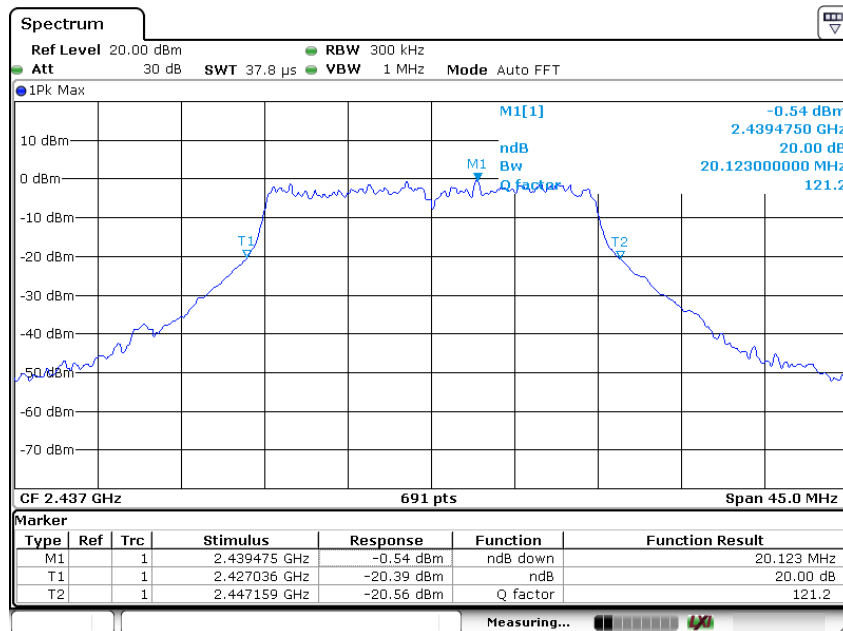


802.11n Channel High 2462MHz(20MHz)

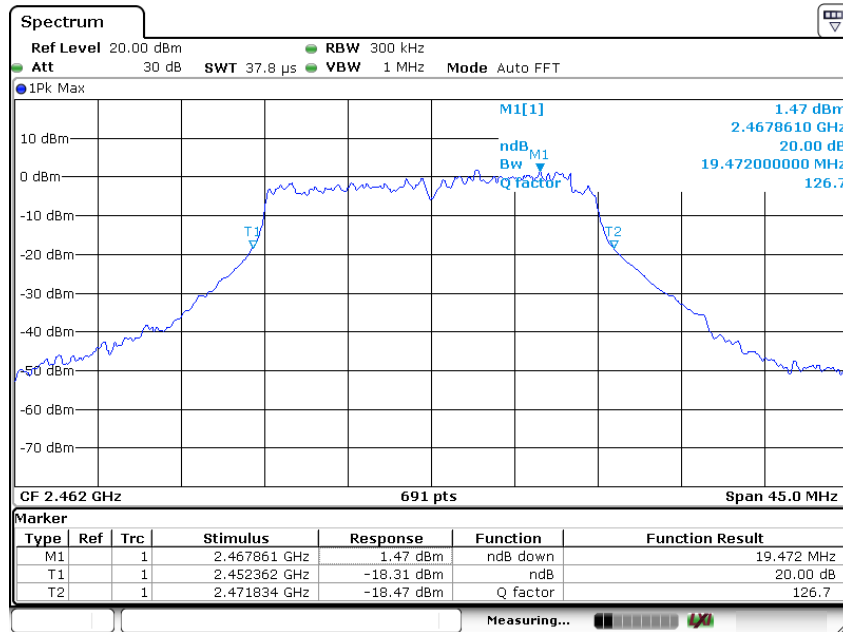


802.11n Channel Low 2422MHz (40MHz)

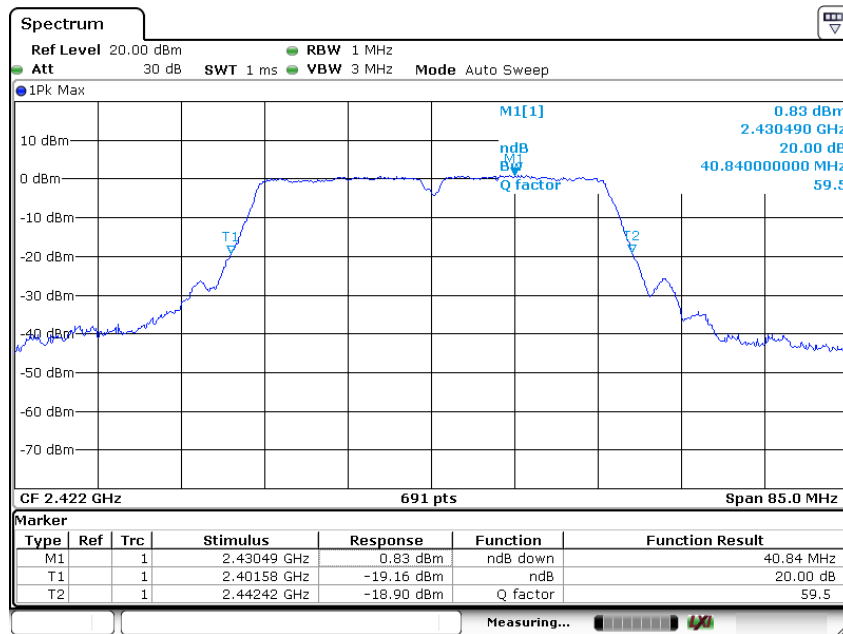

802.11n Channel Middle 2437MHz(40MHz)

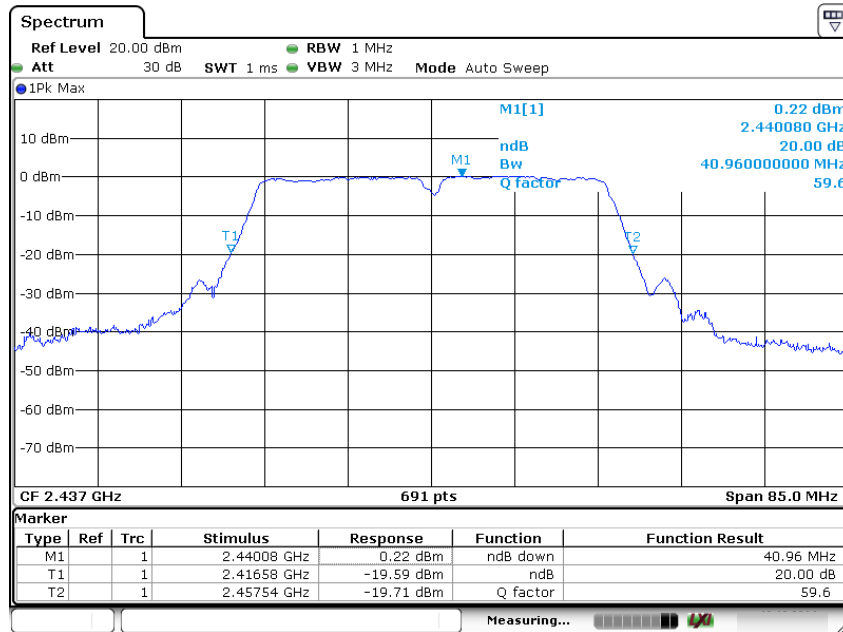


802.11n Channel High 2452MHz(40MHz)

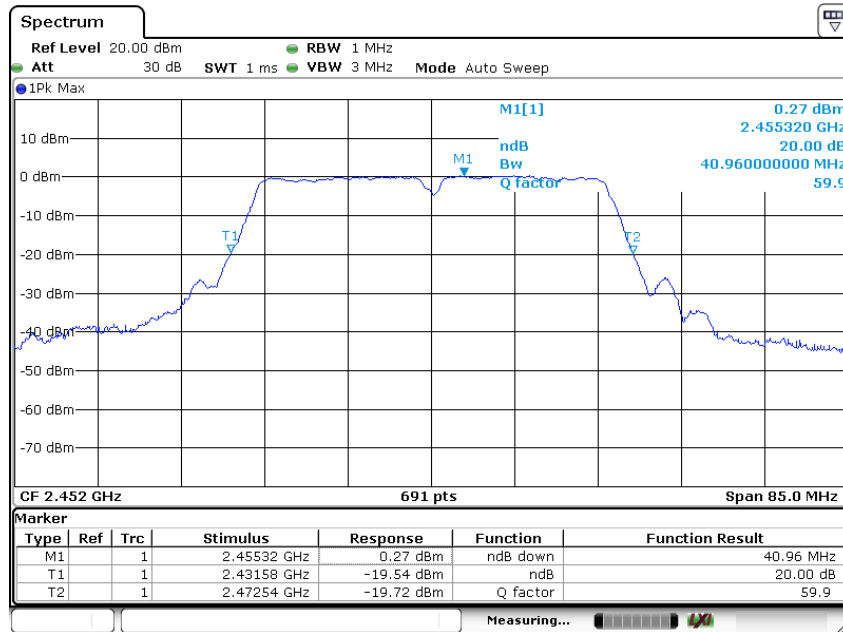

7. MAXIMUM CONDUCTED (AVERAGE) OUTPUT POWER

7.1. Block Diagram of Test Setup

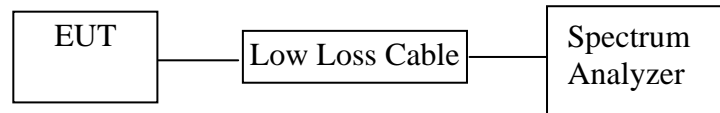

7.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

7.3. EUT Configuration on Measurement

The equipment is installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

7.5. Test Procedure

7.5.1. The EUT was tested according to DTS test procedure of Jun 05, 2014 KDB558074 D01 DTS Meas Guidance v03r02 for compliance to FCC 47CFR 15.247 requirements.

7.5.2. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.3. Set RBW = 1-5% of the OBW, not to exceed 1 MHz, VBW \geq 3 x RBW, Sweep time = auto, Set span to at least 1.5 times the OBW, Detector = RMS.

7.5.4. Measurement the Maximum conducted (average) output power.

7.6. Test Result

The test was performed with 802.11b				
Channel	Frequency (MHz)	Ave output power (dBm)	Ave output power (mW)	Limits dBm / W
Low	2412	17.04	50.58	30 dBm / 1 W
Middle	2437	16.95	49.55	30 dBm / 1 W
High	2462	16.66	46.34	30 dBm / 1 W


The test was performed with 802.11g				
Channel	Frequency (MHz)	Ave output power (dBm)	Ave output power (mW)	Limits dBm / W
Low	2412	16.48	44.46	30 dBm / 1 W
Middle	2437	16.44	44.06	30 dBm / 1 W
High	2462	16.26	42.27	30 dBm / 1 W

The test was performed with 802.11n (20MHz)				
Channel	Frequency (MHz)	Ave output power (dBm)	Ave output power (mW)	Limits dBm / W
Low	2412	15.72	37.33	30 dBm / 1 W
Middle	2437	15.78	37.84	30 dBm / 1 W
High	2462	16.82	48.08	30 dBm / 1 W

The test was performed with 802.11n (40MHz)				
Channel	Frequency (MHz)	Ave output power (dBm)	Ave output power (mW)	Limits dBm / W
Low	2422	13.42	21.98	30 dBm / 1 W
Middle	2437	13.65	23.17	30 dBm / 1 W
High	2452	14.25	26.61	30 dBm / 1 W


The spectrum analyzer plots are attached as below.

802.11b Channel Low 2412MHz

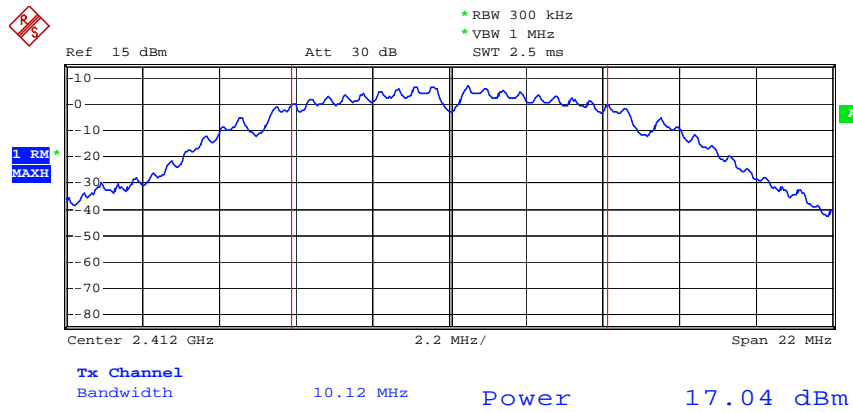


Date: 9.JUL.2015 18:06:55

802.11b Channel Middle 2437MHz

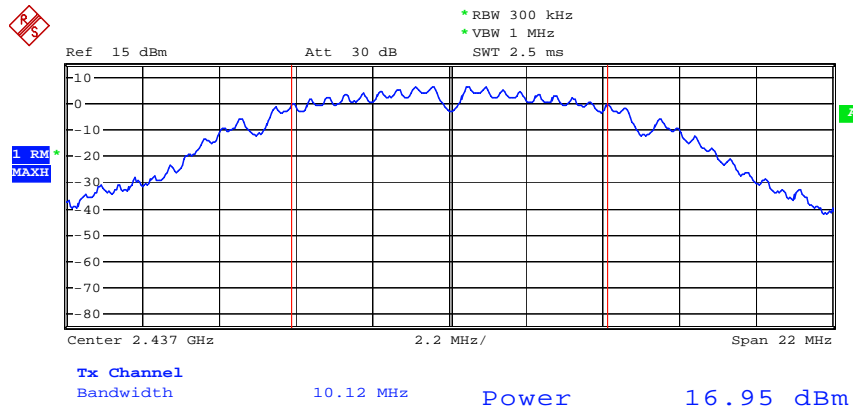


Date: 9.JUL.2015 18:07:59

802.11b Channel High 2462MHz

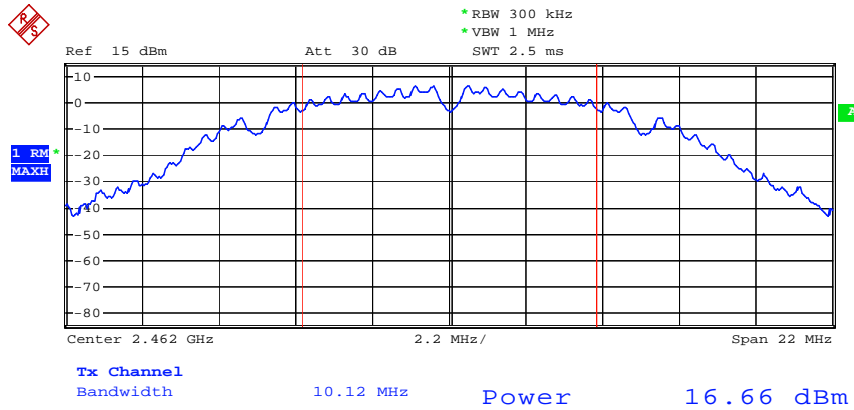


Date: 9.JUL.2015 18:08:43

802.11g Channel Low 2412MHz

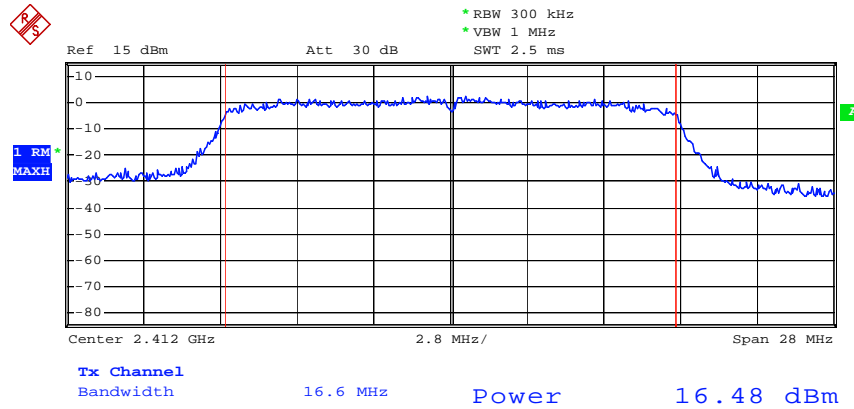


Date: 9.JUL.2015 18:14:25

802.11g Channel Middle 2437MHz

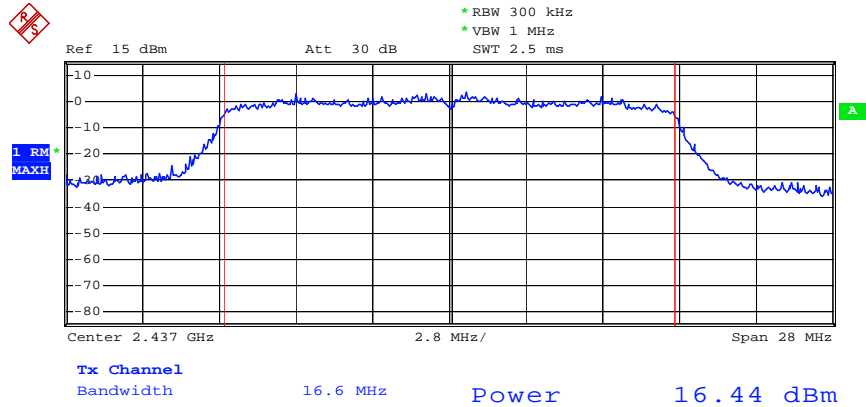


Date: 9.JUL.2015 18:13:33

802.11g Channel High 2462MHz

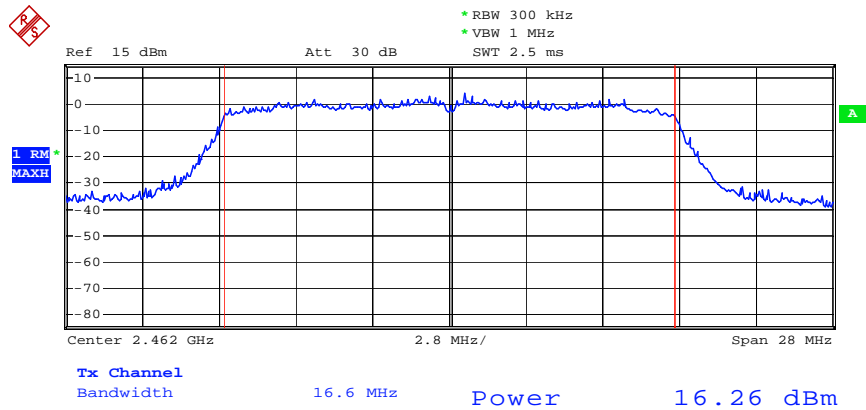


Date: 9.JUL.2015 18:12:28

802.11n Channel Low 2412MHz (20MHz)

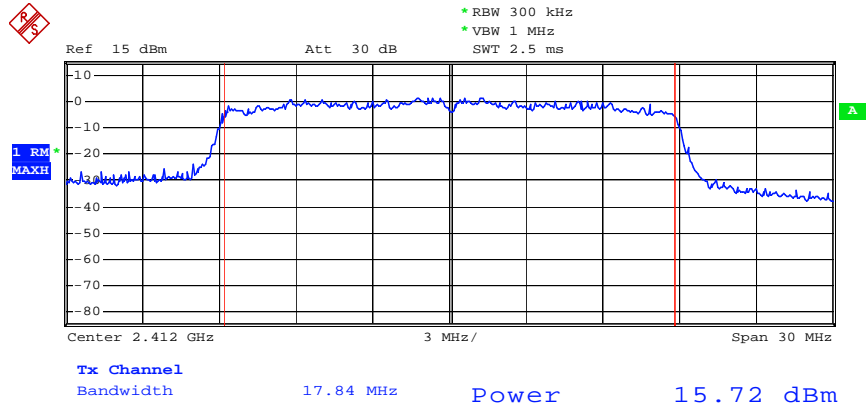


Date: 9.JUL.2015 18:17:10

802.11n Channel Middle 2437MHz (20MHz)

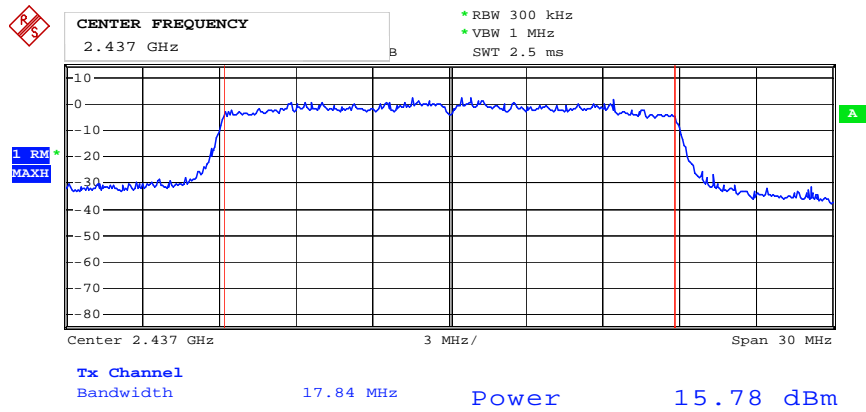


Date: 9.JUL.2015 18:18:05

802.11n Channel High 2462MHz (20MHz)

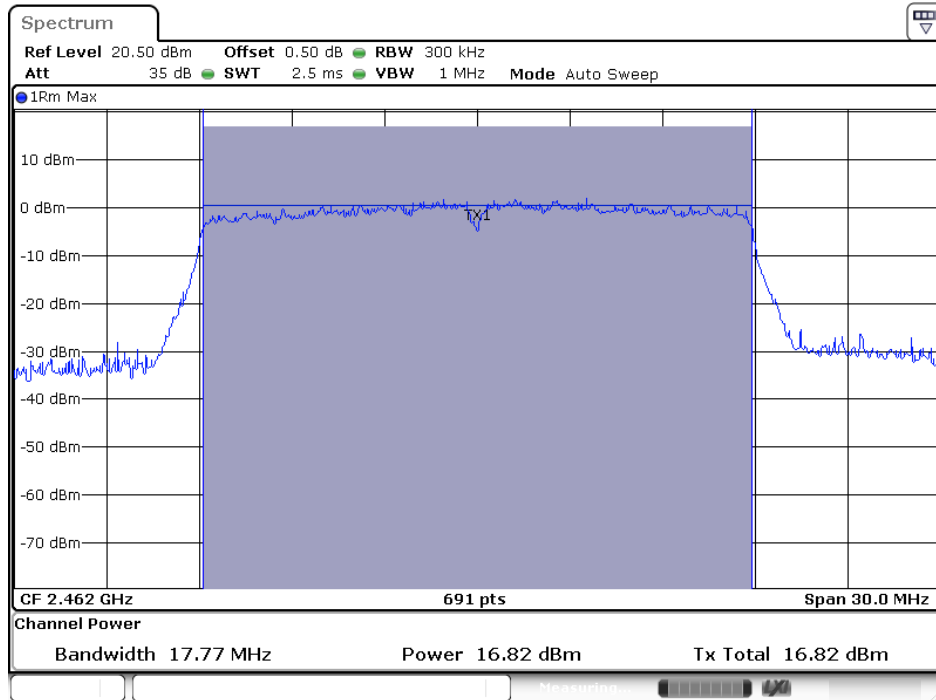


Date: 22.Jun.2015 19:00:36

802.11n Channel Low 2422MHz (40MHz)

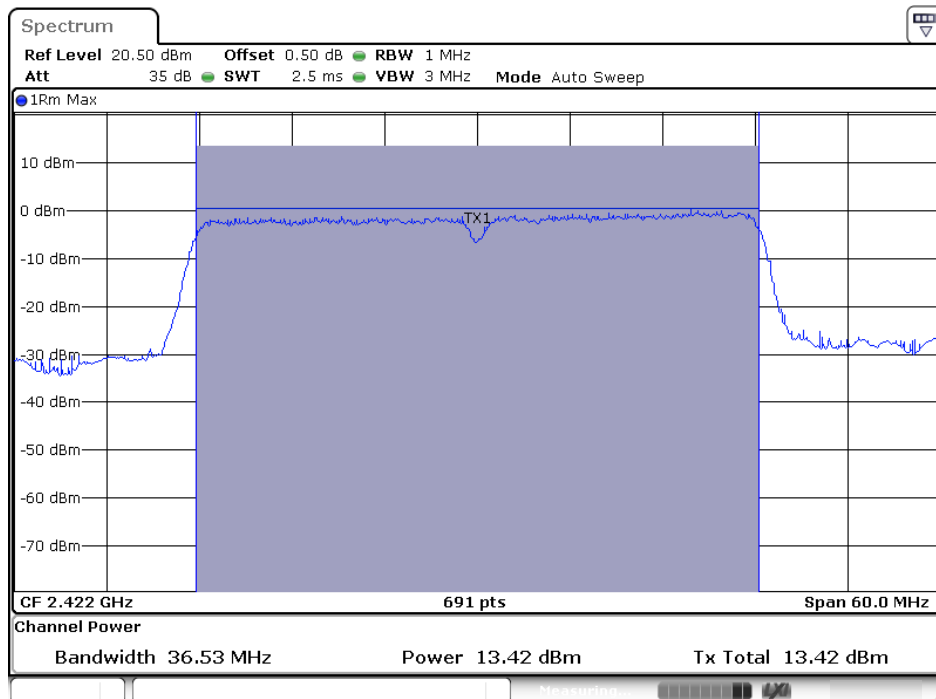


Date: 22.Jun.2015 19:02:48

802.11n Channel Middle 2437MHz (40MHz)

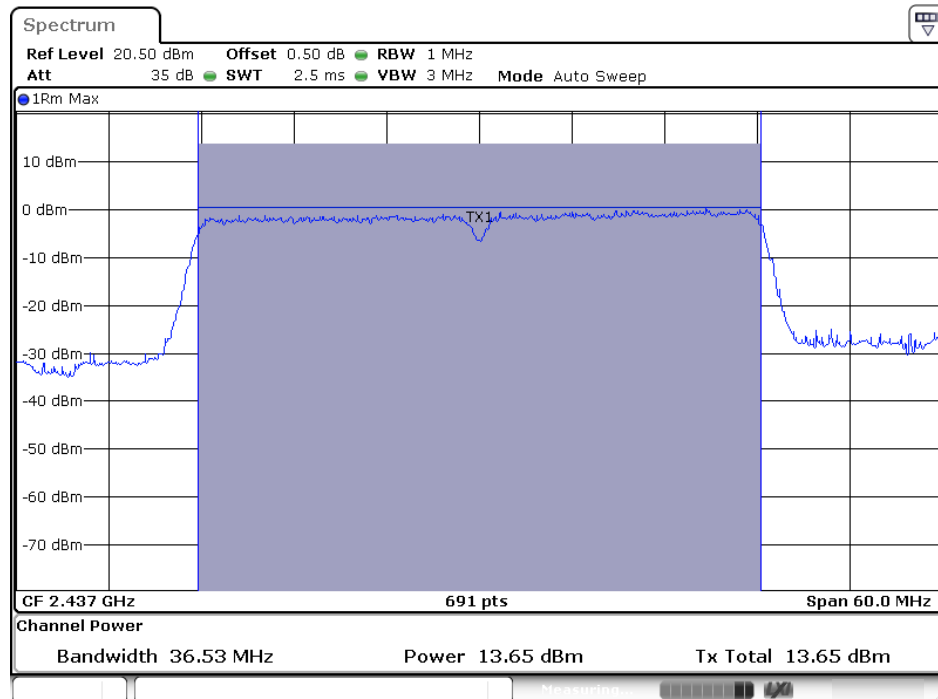

Date: 22.Jun.2015 19:03:57


802.11n Channel High 2452MHz (40MHz)

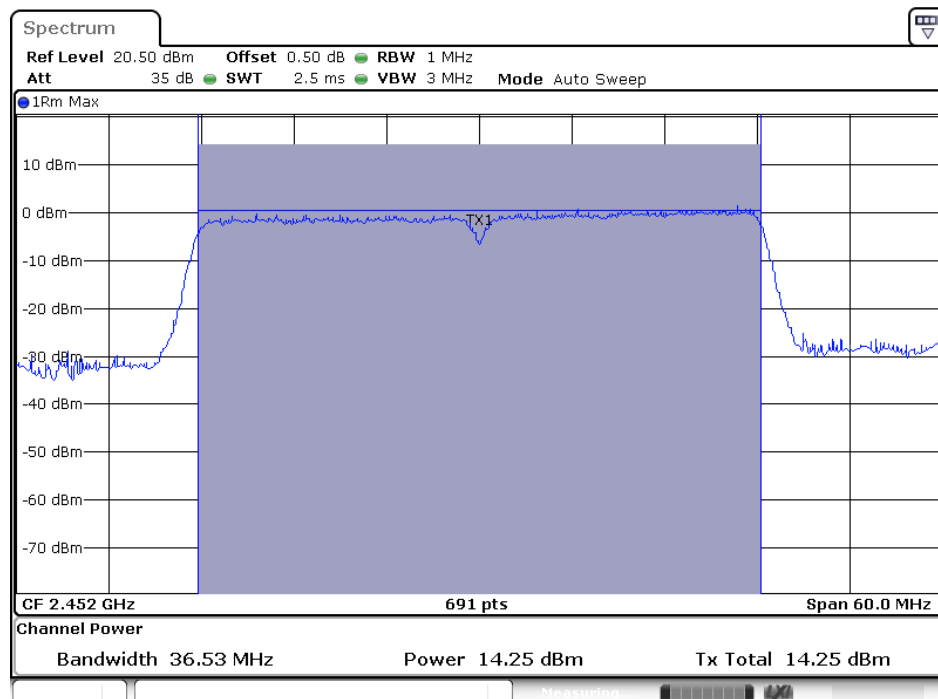

Date: 22.Jun.2015 19:05:11

8. POWER SPECTRAL DENSITY MEASUREMENT

8.1. Block Diagram of Test Setup

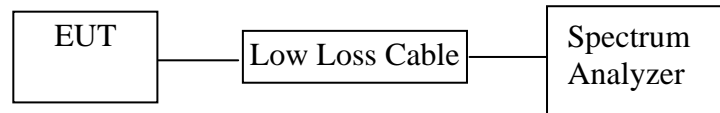

8.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

8.5. Test Procedure

8.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

8.5.2. Measurement Procedure PKPSD:

This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.

3. Set the RBW $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

8.5.3.Measurement the maximum power spectral density.

8.6.Test Result

The test was performed with 802.11b			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2412	-13.67	8 dBm
Middle	2437	-14.32	8 dBm
High	2462	-14.83	8 dBm


The test was performed with 802.11g			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2412	-17.79	8 dBm
Middle	2437	-17.17	8 dBm
High	2462	-17.74	8 dBm

The test was performed with 802.11n (20MHz)			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2412	-18.56	8 dBm
Middle	2437	-18.58	8 dBm
High	2462	-17.65	8 dBm

The test was performed with 802.11n (40MHz)			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2422	-22.88	8 dBm
Middle	2437	-21.01	8 dBm
High	2452	-21.16	8 dBm


The spectrum analyzer plots are attached as below.

802.11b Channel Low 2412MHz

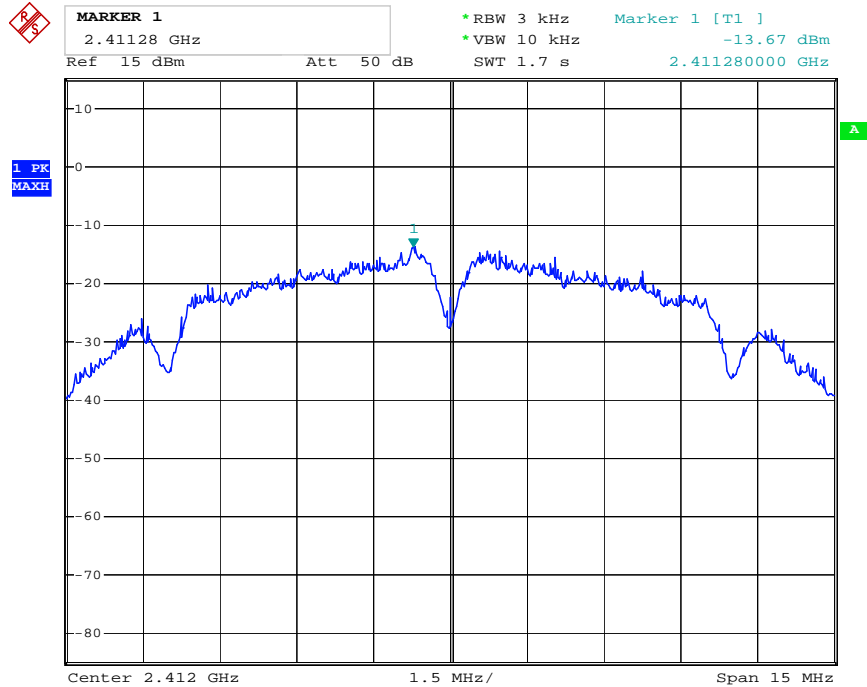


Date: 9.JUL.2015 18:46:12

802.11b Channel Middle 2437MHz

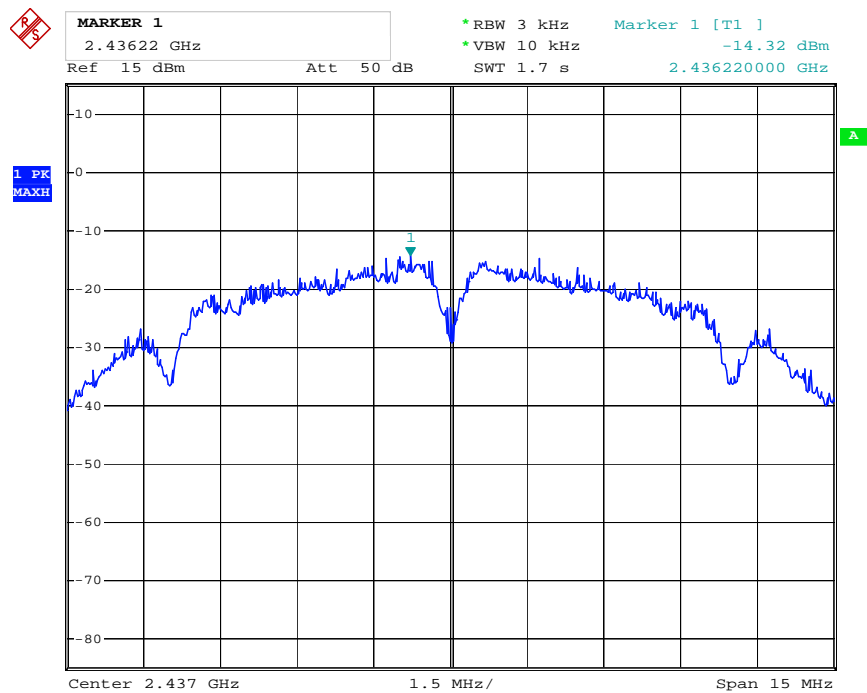


Date: 9.JUL.2015 18:46:58

802.11b Channel High 2462MHz

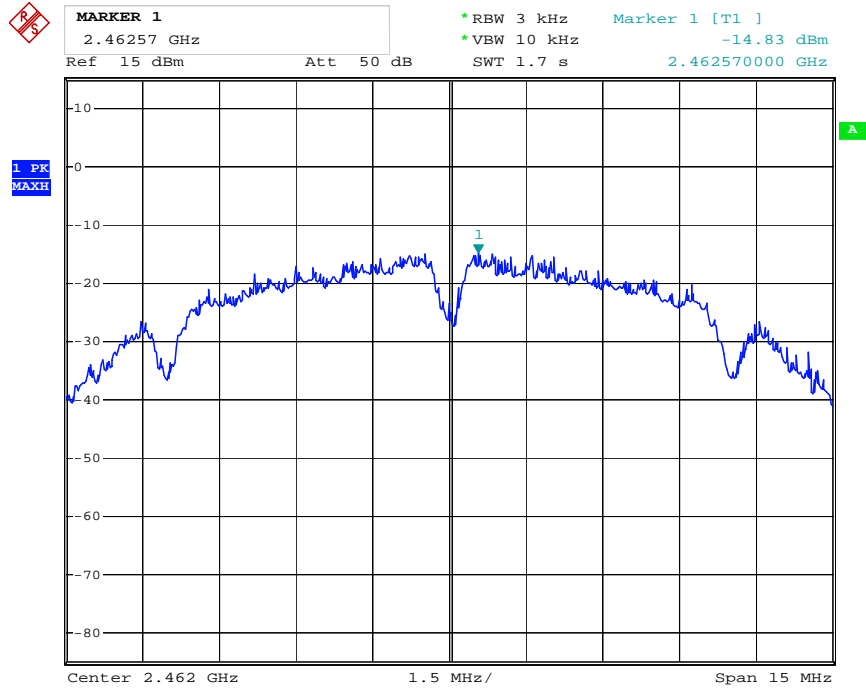


Date: 9.JUL.2015 18:47:36

802.11g Channel Low 2412MHz

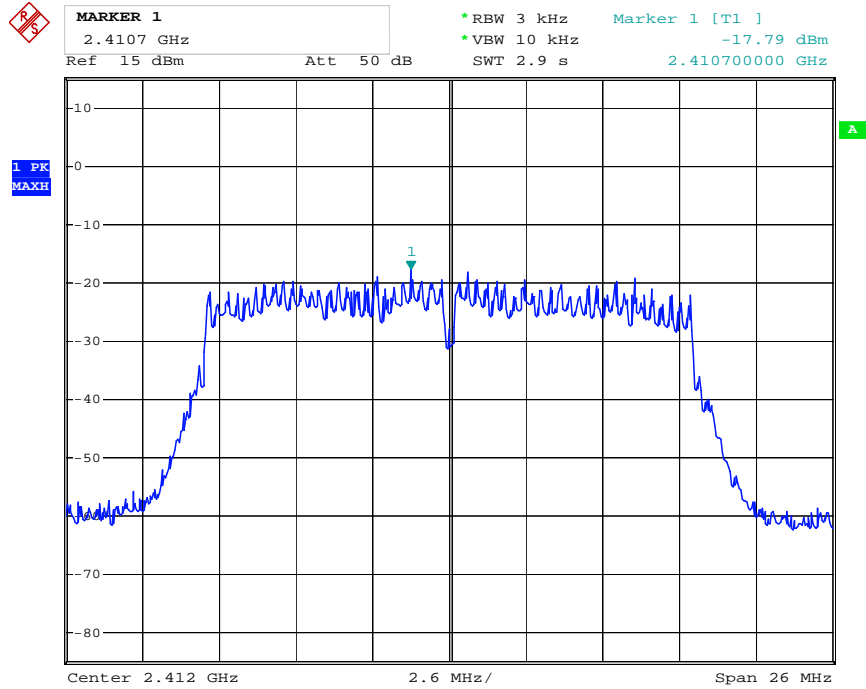


Date: 9.JUL.2015 18:49:01

802.11g Channel Middle 2437MHz

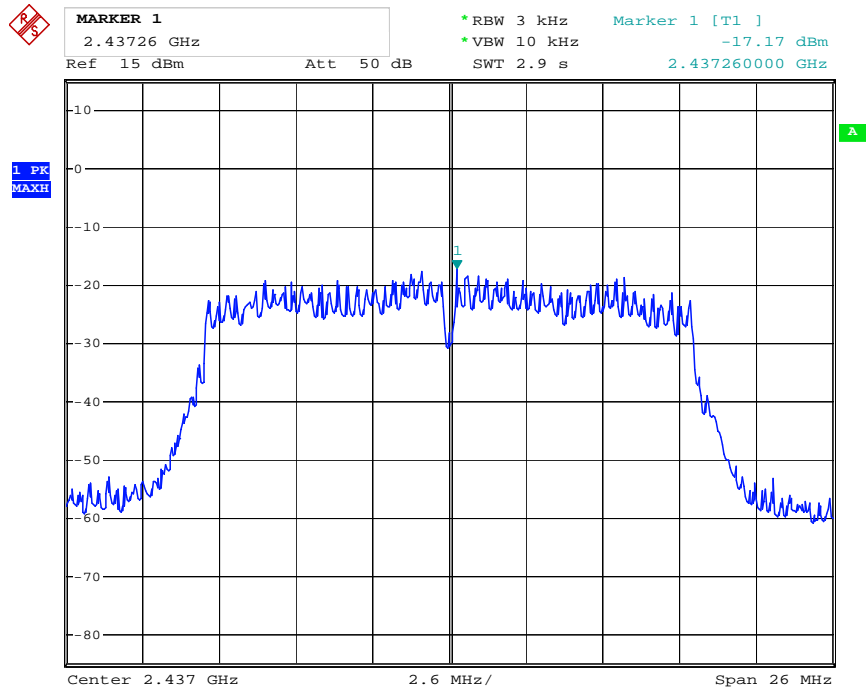


Date: 9.JUL.2015 18:49:30

802.11g Channel High 2462MHz

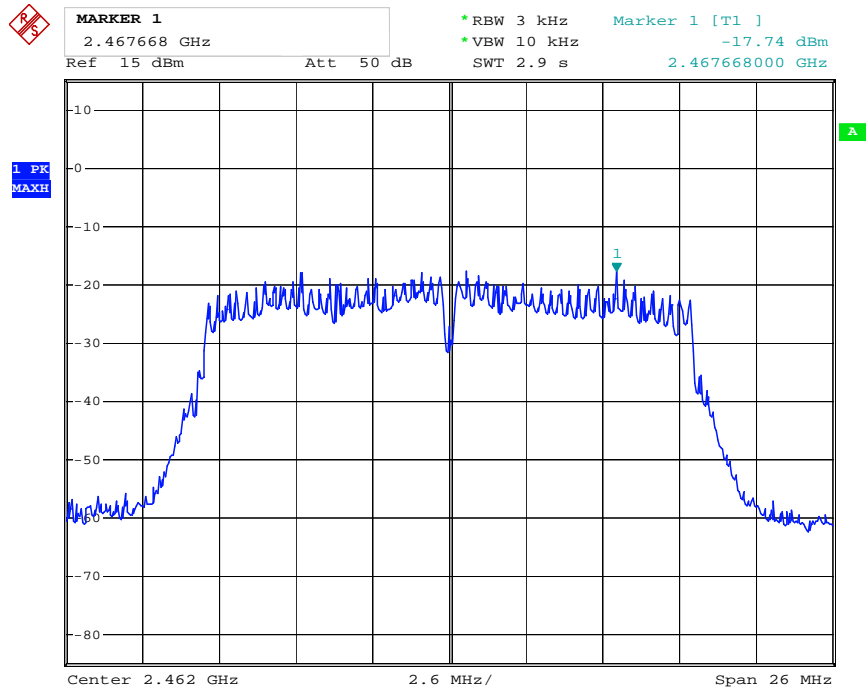


Date: 9.JUL.2015 18:50:00

802.11n Channel Low 2412MHz (20MHz)

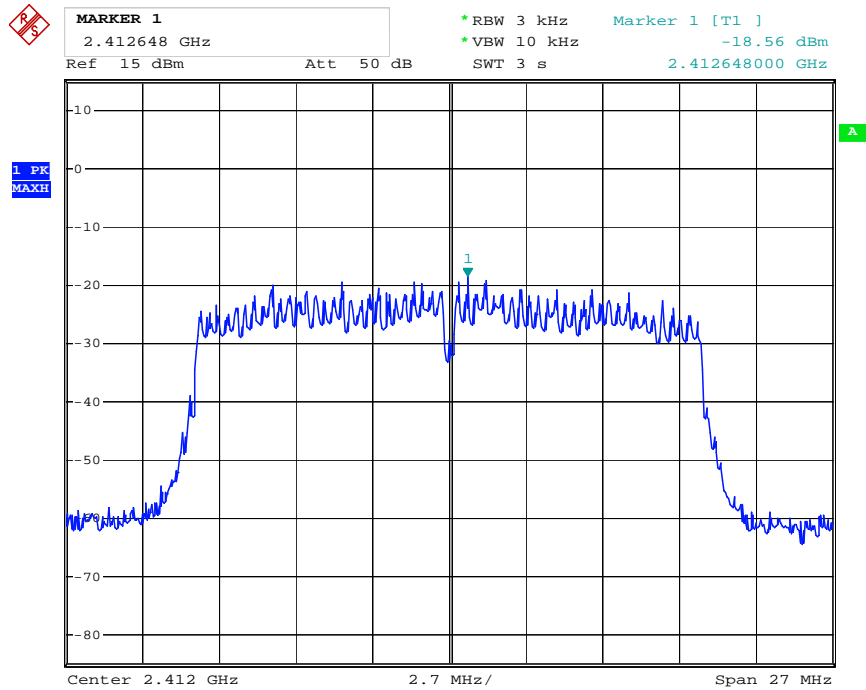


Date: 9.JUL.2015 18:51:53

802.11n Channel Middle 2437MHz (20MHz)

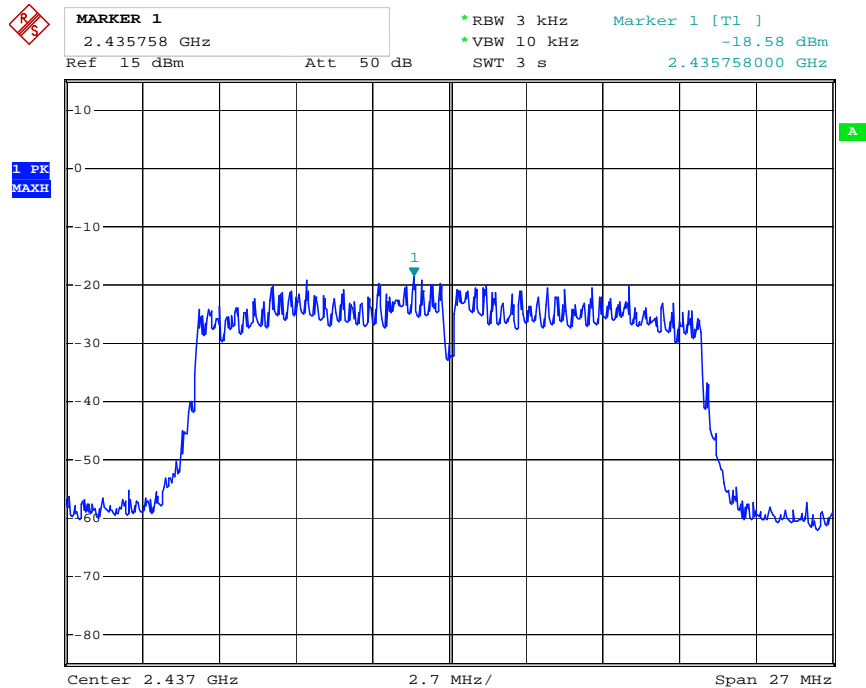


Date: 9.JUL.2015 18:52:30

802.11n Channel High 2462MHz(20MHz)

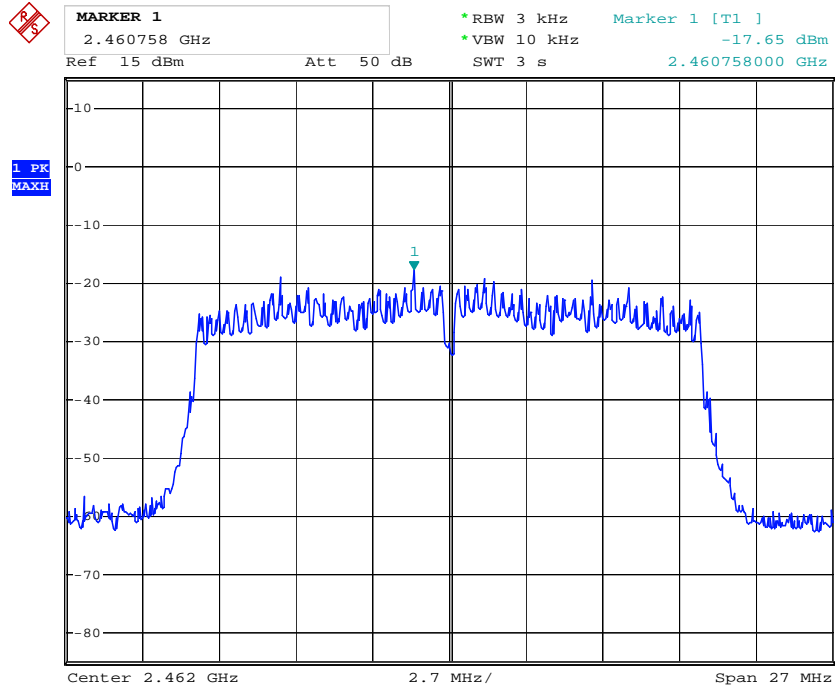


Date: 9.JUL.2015 18:53:12

802.11n Channel Low 2422MHz (40MHz)

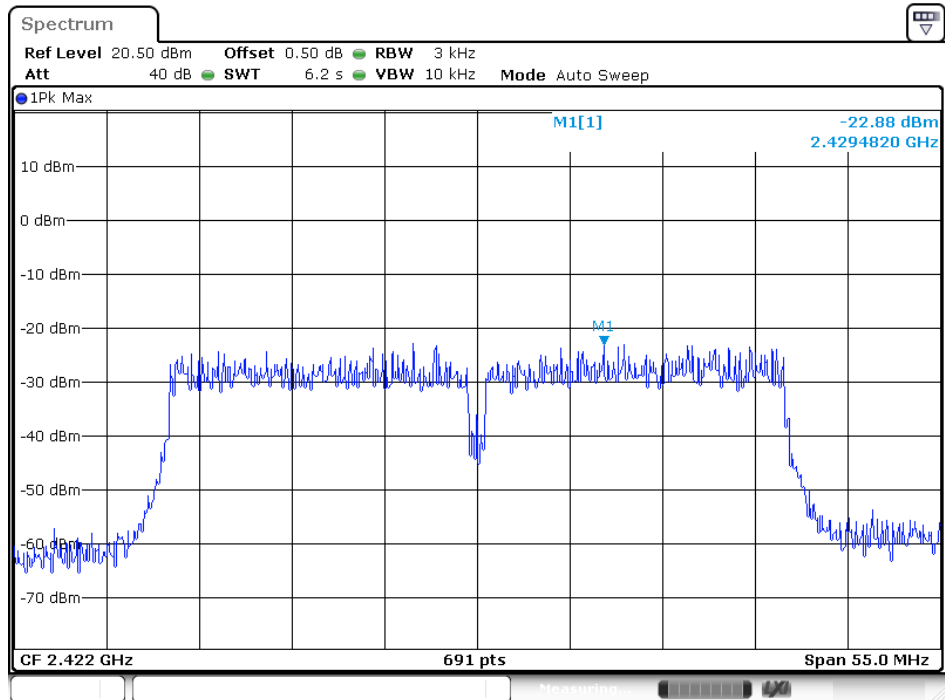


Date: 22.Jun.2015 19:20:02

802.11n Channel Middle 2437MHz(40MHz)

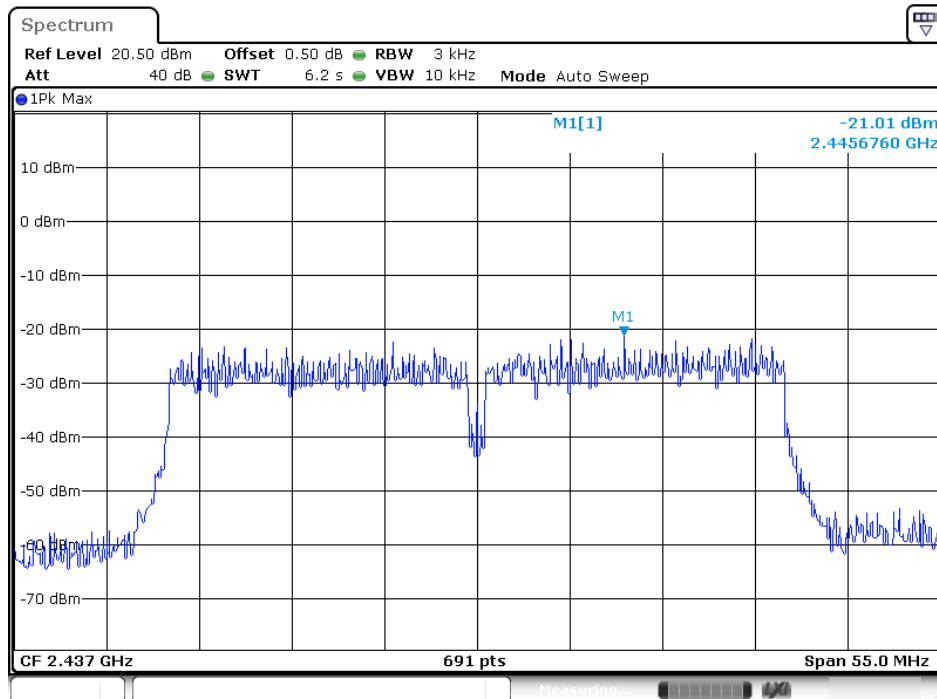

Date: 22.Jun.2015 19:23:17


802.11n Channel High 2452MHz(40MHz)

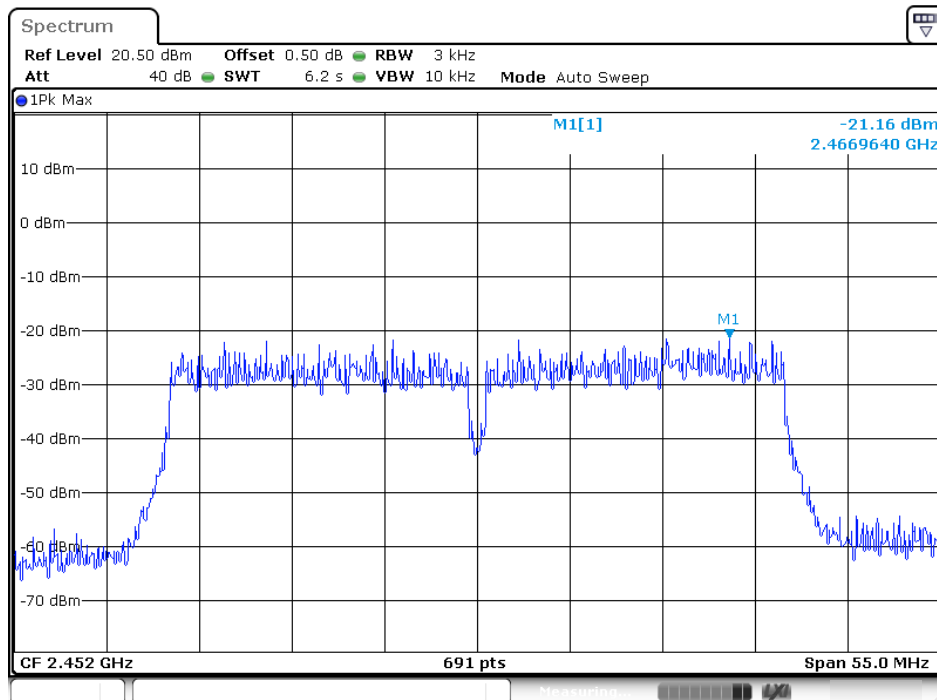

Date: 22.Jun.2015 19:25:28

9. BAND EDGE COMPLIANCE TEST

9.1. Block Diagram of Test Setup

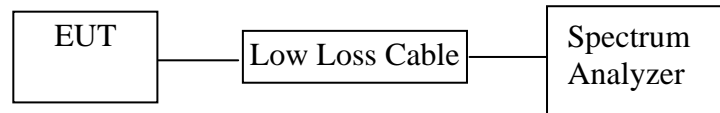

9.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

9.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.4. Operating Condition of EUT

9.4.1. Setup the EUT and simulator as shown as Section 9.1.

9.4.2. Turn on the power of all equipment.

9.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz MHz. We select 2412MHz, 2462MHz and 2422MHz, 2452MHz TX frequency to transmit.

9.5. Test Procedure

Conducted Band Edge:

9.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

9.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz.

Radiate Band Edge:

9.5.3. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.

9.5.4. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

9.5.5. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

9.5.6. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

9.5.7. RBW=1MHz, VBW=1MHz

9.5.8. The band edges was measured and recorded.

9.6. Test Result


The test was performed with 802.11b		
Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	43.14	> 20dBc
2462	50.33	> 20dBc

The test was performed with 802.11g		
Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	30.08	> 20dBc
2462	45.56	> 20dBc

The test was performed with 802.11n (20MHz)		
Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	31.26	> 20dBc
2462	44.10	> 20dBc


The test was performed with 802.11n (40MHz)		
Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2422	34.51	> 20dBc
2452	29.77	> 20dBc

802.11b Channel Low 2412MHz

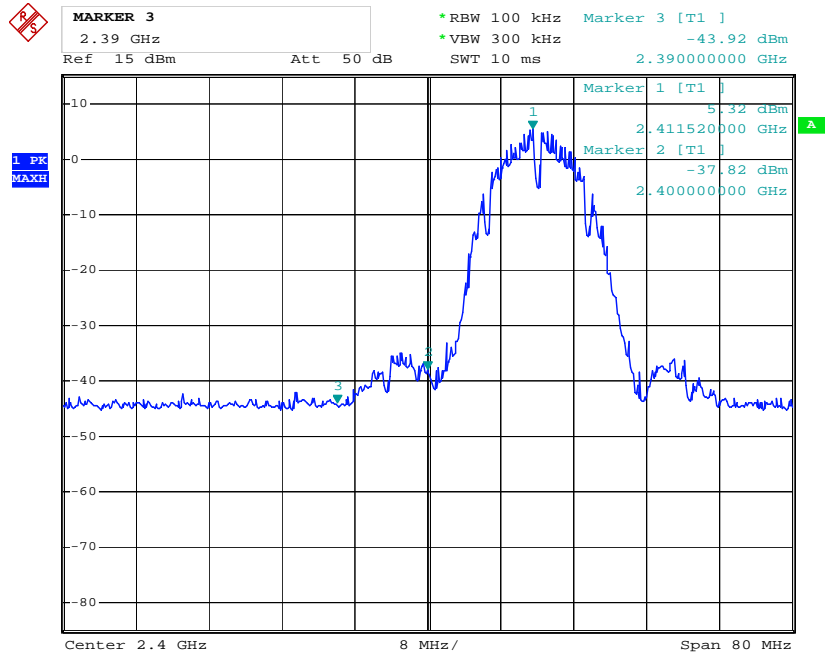


Date: 9.JUL.2015 17:47:16

802.11b Channel High 2462MHz

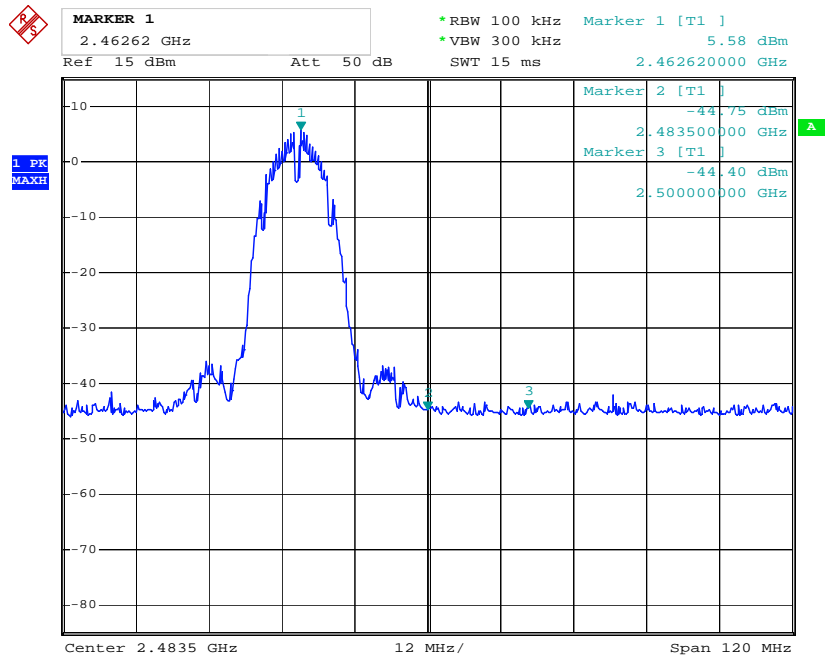


Date: 9.JUL.2015 17:48:40

802.11g Channel Low 2412MHz

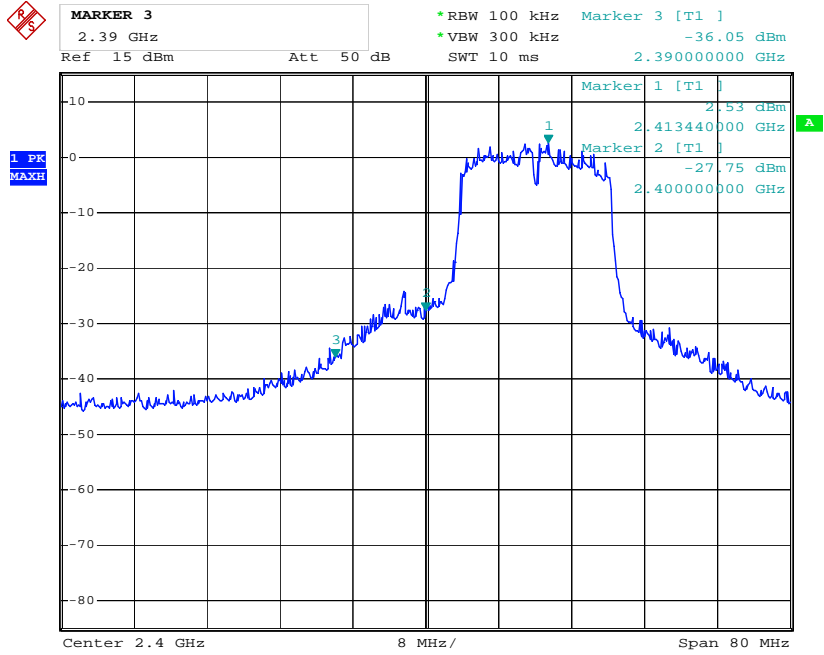


Date: 9.JUL.2015 17:49:44

802.11g Channel High 2462MHz

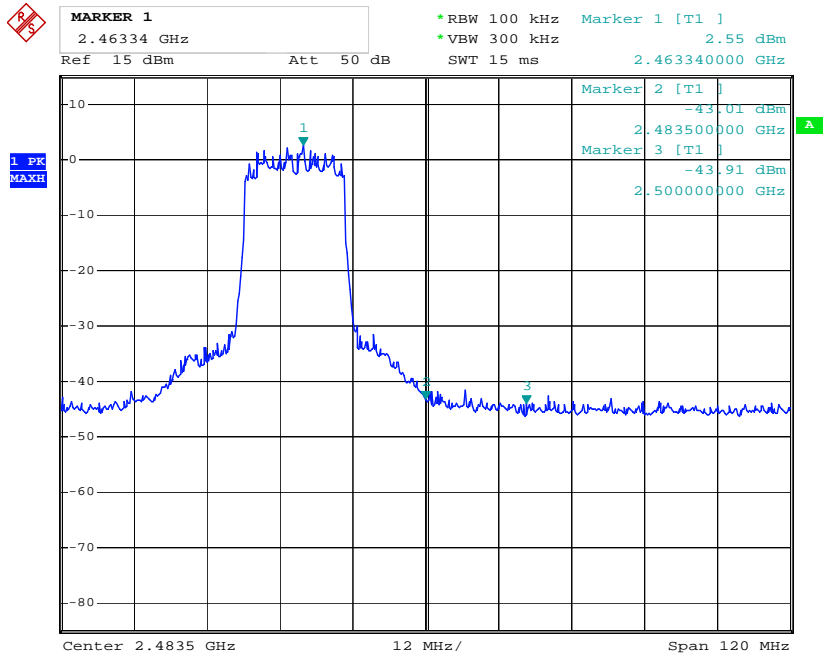


Date: 9.JUL.2015 17:49:09

802.11n Channel Low 2412MHz (20MHz)

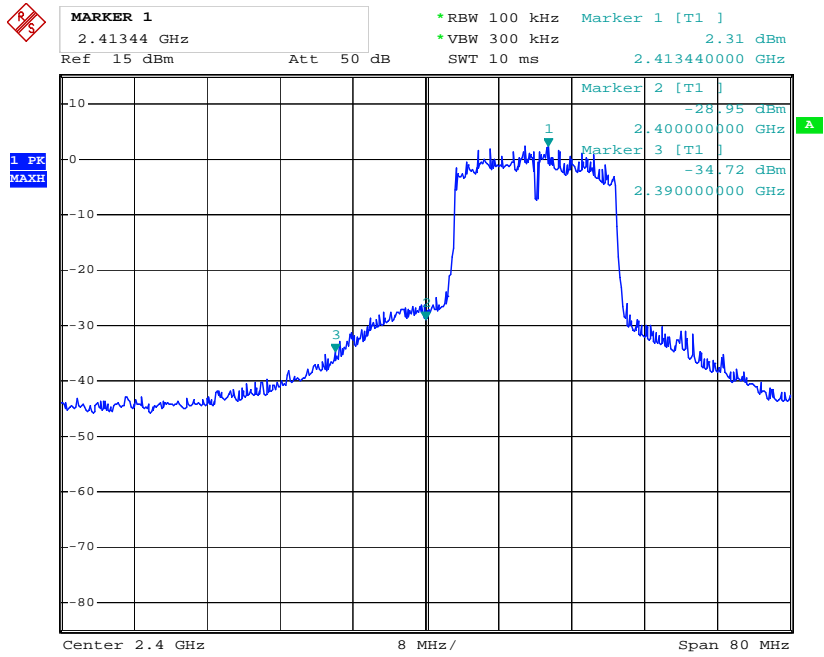


Date: 9.JUL.2015 17:50:20

802.11n Channel High 2462MHz (20MHz)

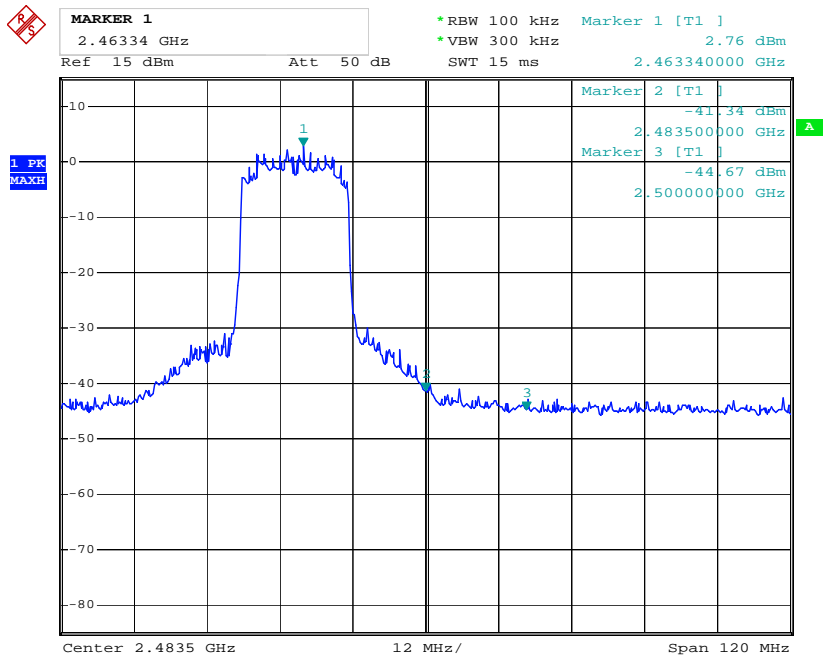


Date: 9.JUL.2015 17:51:14

802.11n Channel Low 2422MHz (40MHz)

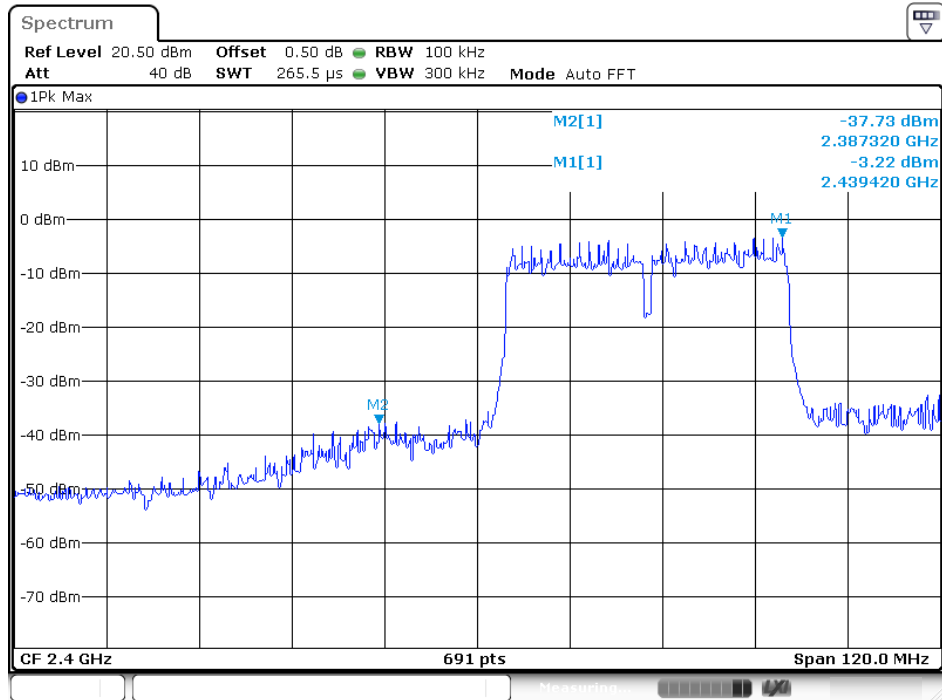

Date: 22.Jun.2015 19:37:04

802.11n Channel High 2452MHz (40MHz)

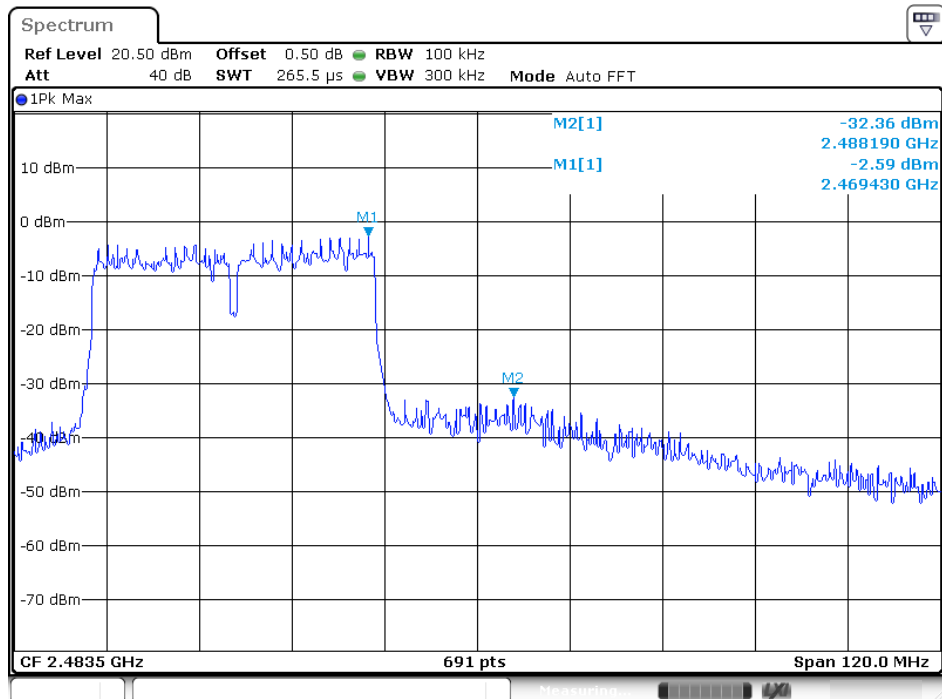

Date: 22.Jun.2015 19:41:08

Radiated Band Edge Result

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

3. Display the measurement of peak values.

Test Procedure:

The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground(Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

Let the EUT work in TX modes then measure it.

We select 2412MHz, 2462MHz TX frequency to transmit(802.11b/g/n20 mode).


We select 2422MHz, 2452MHz TX frequency to transmit(802.11n40 mode).

During the radiated emission test, the spectrum analyzer was set with the following configurations:

- 1.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz.
- 2.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- 3.All modes of operation were investigated and the worst-case emissions are reported.

Job No.: Star_tmp #387	Polarization: Horizontal
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/06/24/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/14/26
EUT: Indoor Air Quality Sensor	Engineer Signature: Star
Mode: TX Channel 1(802.11b)	Distance: 3m
Model: AAware	
Manufacturer: Mixwell	

Note: Report No.:ATE20151334

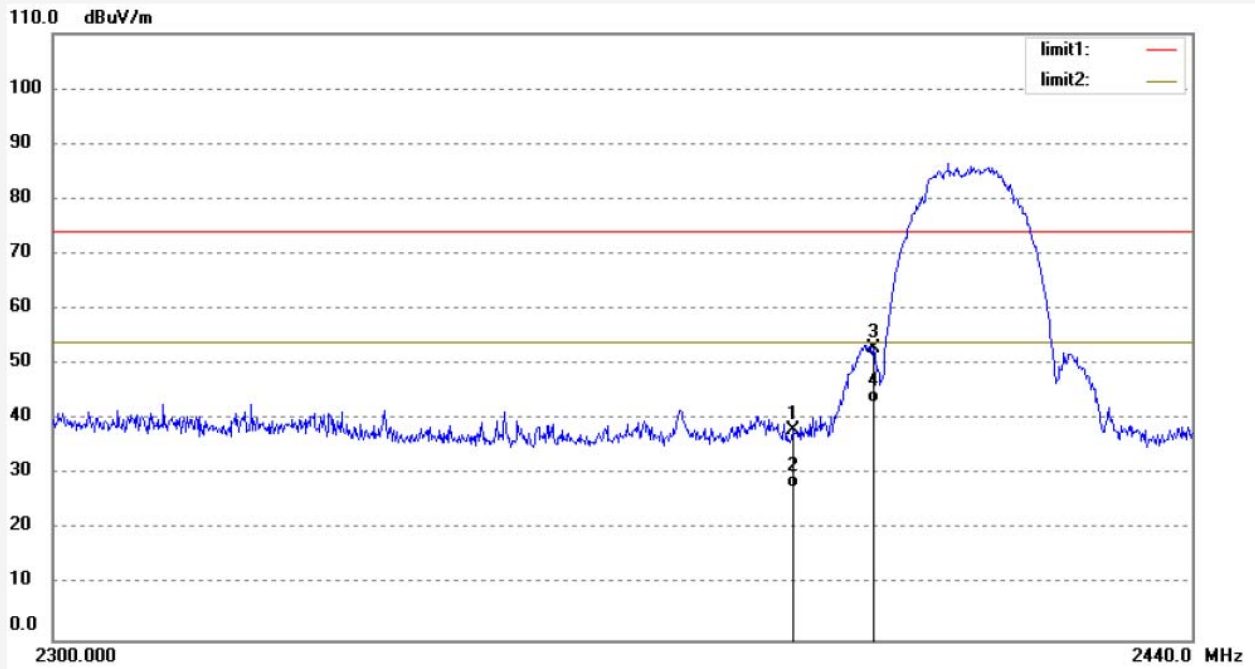


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	45.67	-7.53	38.14	74.00	-35.86	peak			
2	2390.000	35.23	-7.53	27.70	54.00	-26.30	peak			
3	2400.000	60.52	-7.46	53.06	74.00	-20.94	peak			
4	2400.000	50.60	-7.46	43.14	54.00	-10.86	peak			

Note: Average measurement with peak detection at No.2&4

Job No.: Star_tmp #386	Polarization: Vertical
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/06/24/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/12/47
EUT: Indoor Air Quality Sensor	Engineer Signature: Star
Mode: TX Channel 1(802.11b)	Distance: 3m
Model: AAware	
Manufacturer: Mixwell	

Note: Report No.:ATE20151334

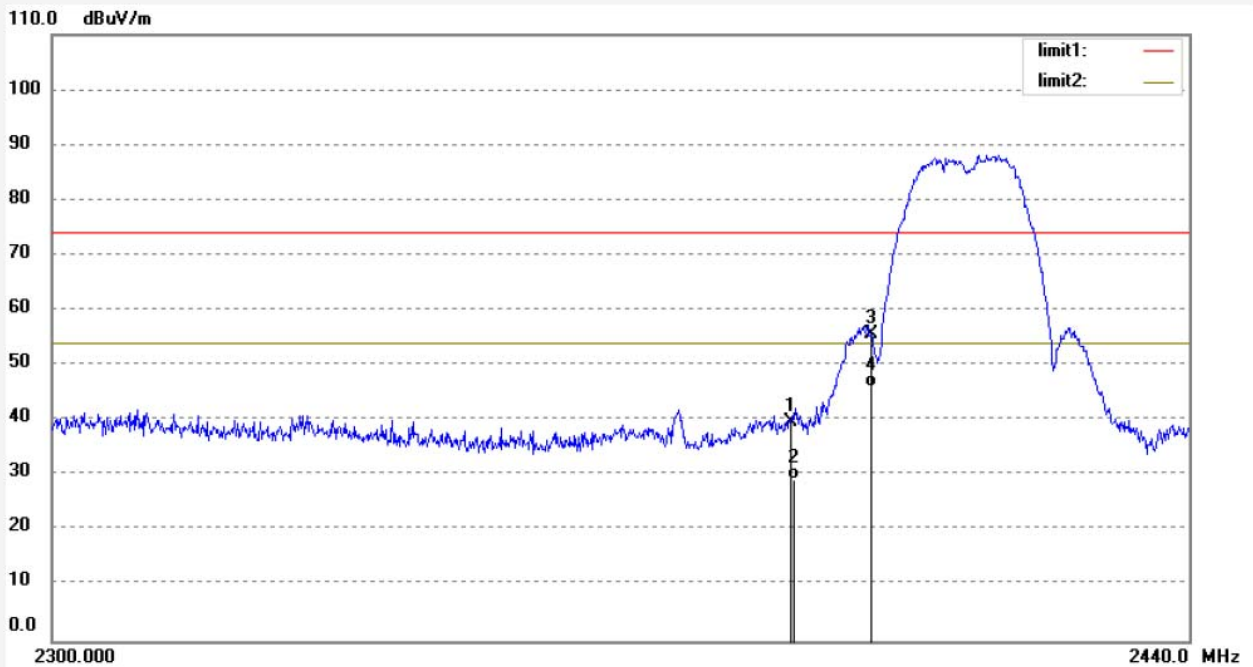

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	47.28	-7.53	39.75	74.00	-34.25	peak			
2	2390.000	36.70	-7.53	29.17	54.00	-24.83	peak			
3	2400.000	63.15	-7.46	55.69	74.00	-18.31	peak			
4	2400.000	53.60	-7.46	46.14	54.00	-7.86	peak			

Note: Average measurement with peak detection at No.2&4




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #384	Polarization: Horizontal
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/06/24/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/08/56
EUT: Indoor Air Quality Sensor	Engineer Signature: Star
Mode: TX Channel 11(802.11b)	Distance: 3m
Model: AAware	
Manufacturer: Mixwell	

Note: Report No.:ATE20151334

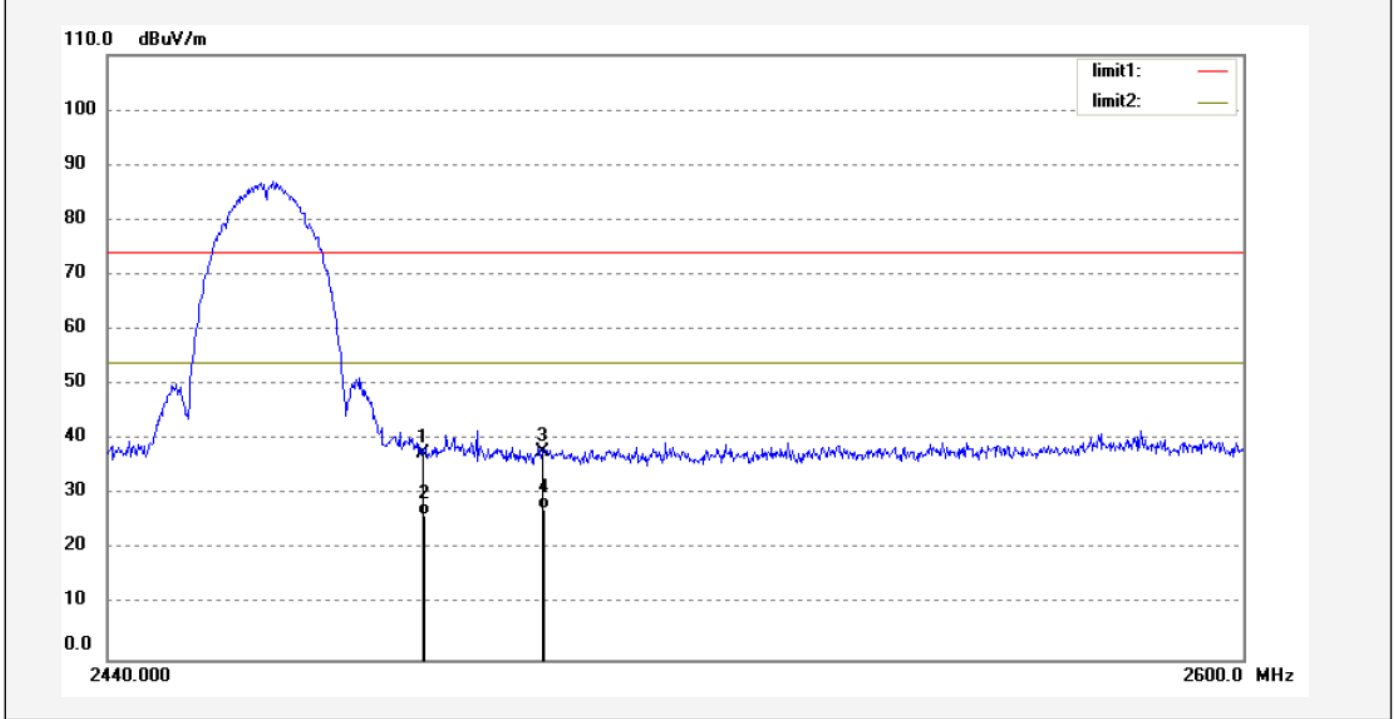


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	44.94	-7.37	37.57	74.00	-36.43	peak			
2	2483.500	33.61	-7.37	26.24	54.00	-27.76	peak			
3	2500.000	45.20	-7.40	37.80	74.00	-36.20	peak			
4	2500.000	34.73	-7.40	27.33	54.00	-26.67	peak			

Note: Average measurement with peak detection at No.2&4

Job No.: Star_tmp #385	Polarization: Vertical
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/06/24/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/10/12
EUT: Indoor Air Quality Sensor	Engineer Signature: Star
Mode: TX Channel 11(802.11b)	Distance: 3m
Model: AAware	
Manufacturer: Mixwell	

Note: Report No.:ATE20151334

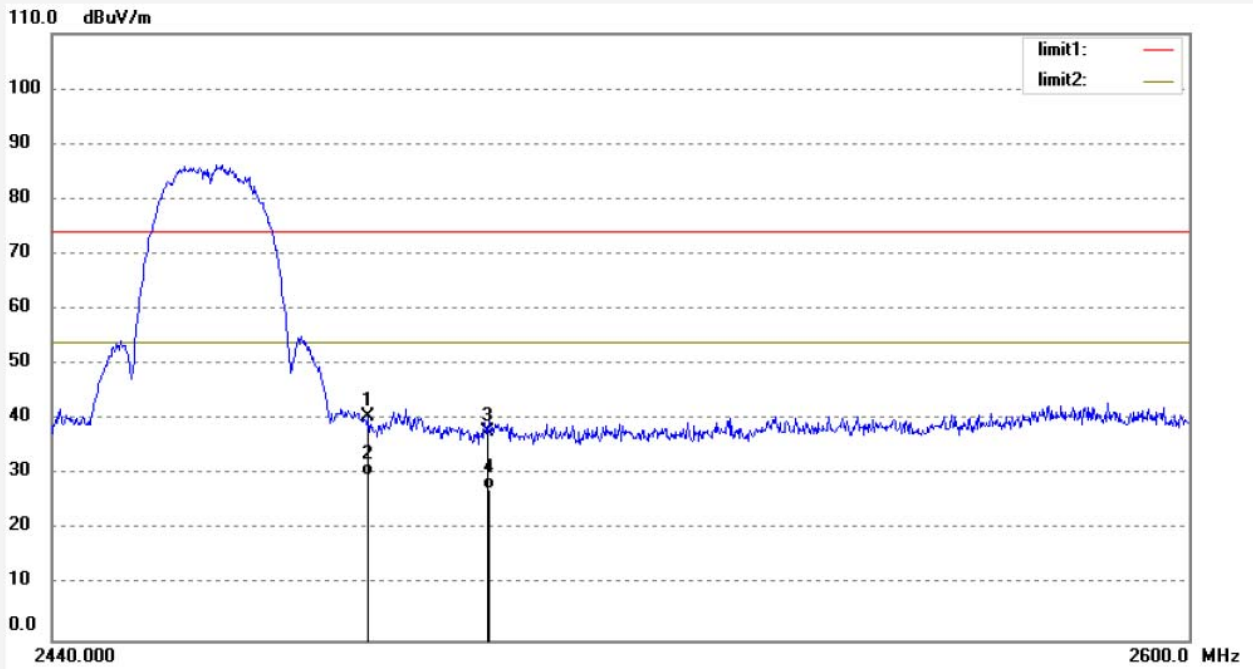


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	47.94	-7.37	40.57	74.00	-33.43	peak			
2	2483.500	37.14	-7.37	29.77	54.00	-24.23	peak			
3	2500.000	45.17	-7.40	37.77	74.00	-36.23	peak			
4	2500.000	34.64	-7.40	27.24	54.00	-26.76	peak			

Note: Average measurement with peak detection at No.2&4

Job No.: Star_tmp #380	Polarization: Horizontal
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/06/24/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/01/53
EUT: Indoor Air Quality Sensor	Engineer Signature: Star
Mode: TX Channel 1(802.11g)	Distance: 3m
Model: AAware	
Manufacturer: Mixwell	

Note: Report No.:ATE20151334

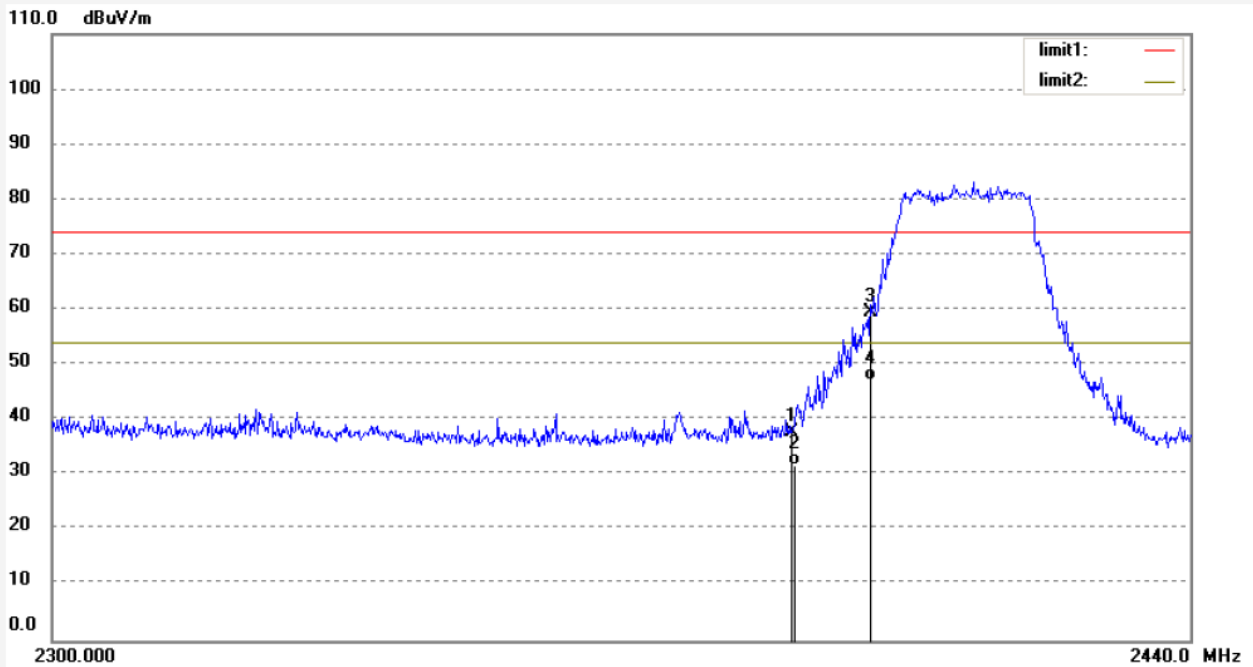


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	45.46	-7.53	37.93	74.00	-36.07	peak			
2	2390.000	39.17	-7.53	31.64	54.00	-22.36	peak			
3	2400.000	66.90	-7.46	59.44	74.00	-14.56	peak			
4	2400.000	54.67	-7.46	47.21	54.00	-6.79	peak			

Note: Average measurement with peak detection at No.2&4

Job No.: Star_tmp #381	Polarization: Vertical
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/06/24/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/03/06
EUT: Indoor Air Quality Sensor	Engineer Signature: Star
Mode: TX Channel 1(802.11g)	Distance: 3m
Model: AAware	
Manufacturer: Mixwell	

Note: Report No.:ATE20151334

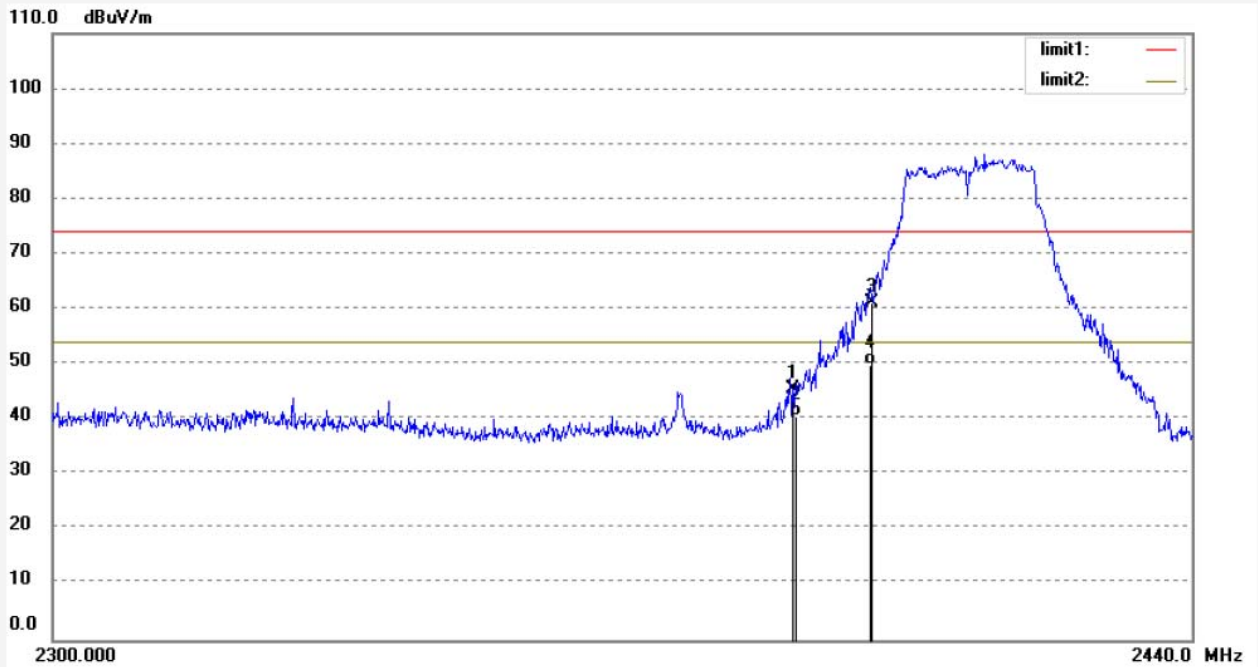

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	53.15	-7.53	45.62	74.00	-28.38	peak			
2	2390.000	47.98	-7.53	40.45	54.00	-13.55	peak			
3	2400.000	68.57	-7.46	61.11	74.00	-12.89	peak			
4	2400.000	57.40	-7.46	49.94	54.00	-4.06	peak			

Note: Average measurement with peak detection at No.2&4




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #383	Polarization: Horizontal
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/06/24/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/06/59
EUT: Indoor Air Quality Sensor	Engineer Signature: Star
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: AAware	
Manufacturer: Mixwell	

Note: Report No.:ATE20151334

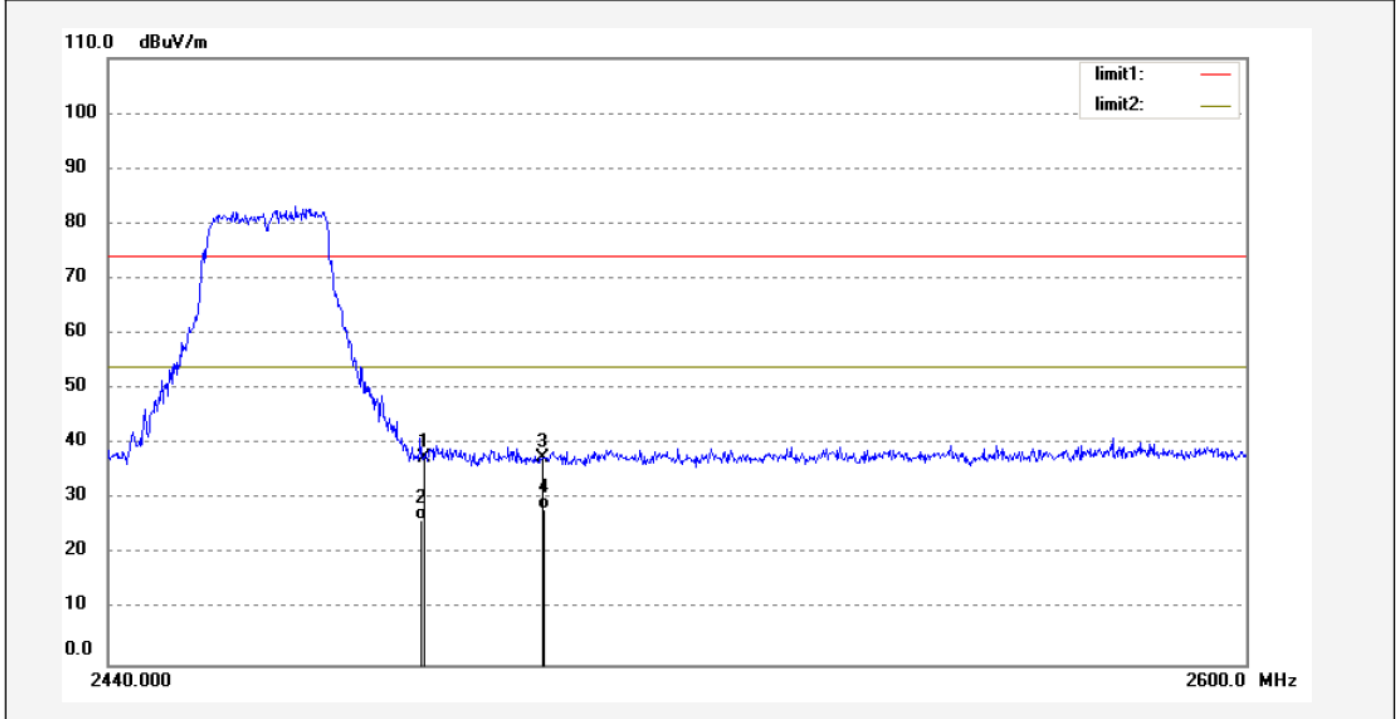


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	44.98	-7.37	37.61	74.00	-36.39	peak			
2	2483.500	33.70	-7.37	26.33	54.00	-27.67	peak			
3	2500.000	44.90	-7.40	37.50	74.00	-36.50	peak			
4	2500.000	35.60	-7.40	28.20	54.00	-25.80	peak			

Note: Average measurement with peak detection at No.2&4

Job No.: Star_tmp #382	Polarization: Vertical
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/06/24/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/05/08
EUT: Indoor Air Quality Sensor	Engineer Signature: Star
Mode: TX Channel 11(802.11g)	Distance: 3m
Model: AAware	
Manufacturer: Mixwell	

Note: Report No.:ATE20151334

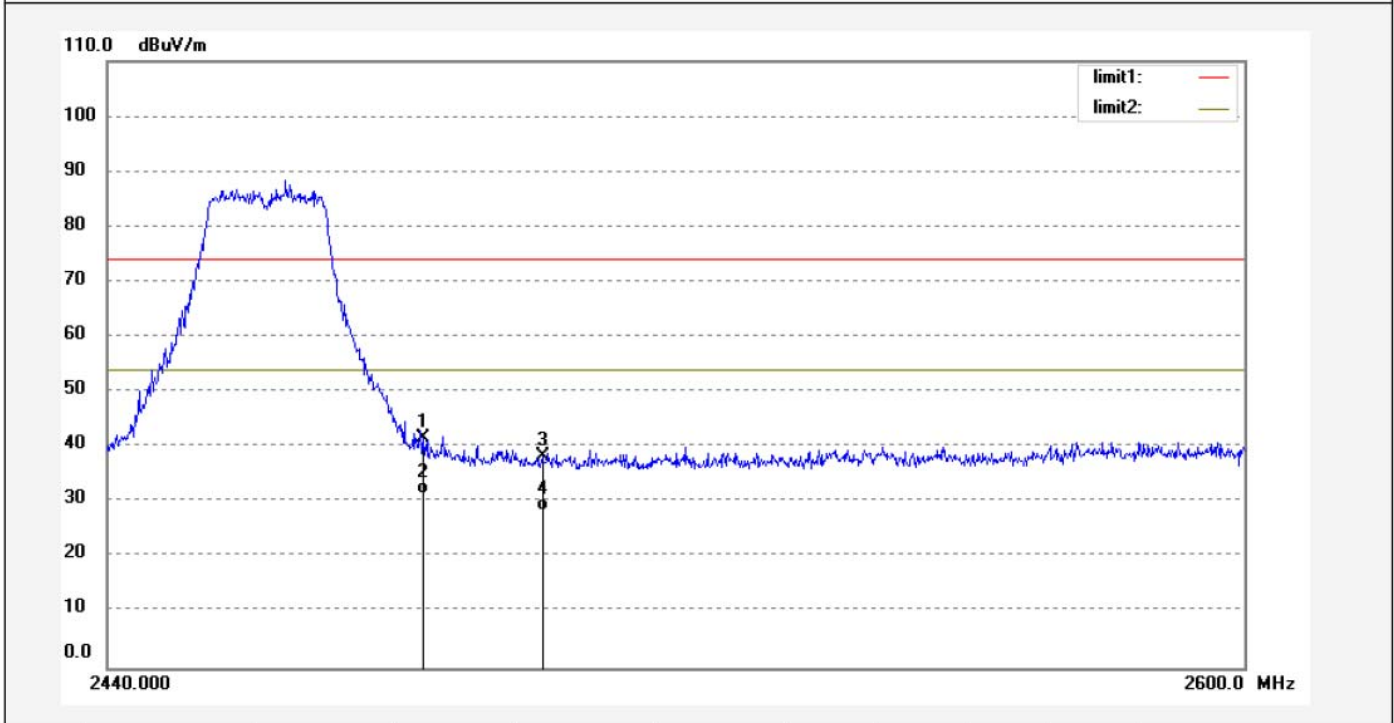


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	49.00	-7.37	41.63	74.00	-32.37	peak			
2	2483.500	38.97	-7.37	31.60	54.00	-22.40	peak			
3	2500.000	45.77	-7.40	38.37	74.00	-35.63	peak			
4	2500.000	36.00	-7.40	28.60	54.00	-25.40	peak			

Note: Average measurement with peak detection at No.2&4

Job No.: Star_tmp #388	Polarization: Horizontal
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/06/24/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/16/12
EUT: Indoor Air Quality Sensor	Engineer Signature: Star
Mode: TX Channel 1(802.11n20)	Distance: 3m
Model: AAware	
Manufacturer: Mixwell	

Note: Report No.:ATE20151334

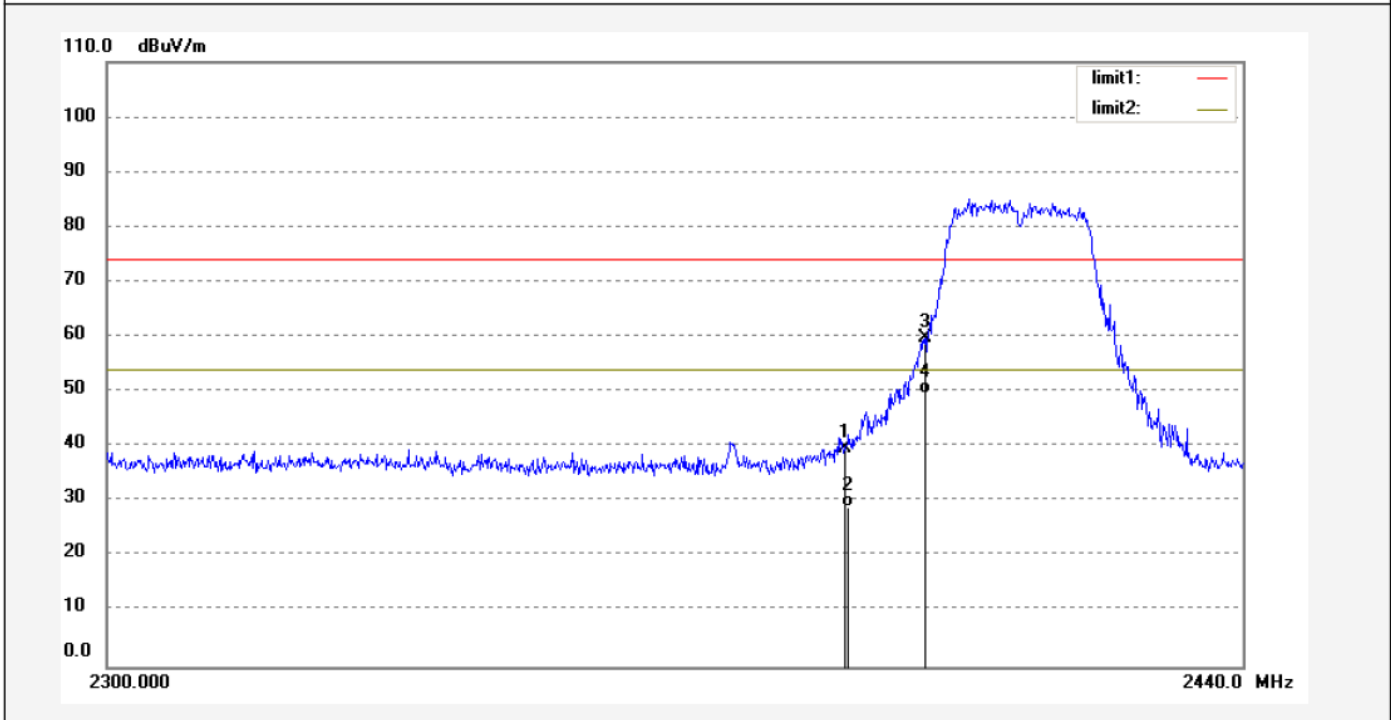


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	47.35	-7.53	39.82	74.00	-34.18	peak			
2	2390.000	36.57	-7.53	29.04	54.00	-24.96	peak			
3	2400.000	67.22	-7.46	59.76	74.00	-14.24	peak			
4	2400.000	56.97	-7.46	49.51	54.00	-4.49	peak			

Note: Average measurement with peak detection at No.2&4

Job No.: Star_tmp #389	Polarization: Vertical
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/06/24/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/17/39
EUT: Indoor Air Quality Sensor	Engineer Signature: Star
Mode: TX Channel 1(802.11n20)	Distance: 3m
Model: AAware	
Manufacturer: Mixwell	

Note: Report No.:ATE20151334

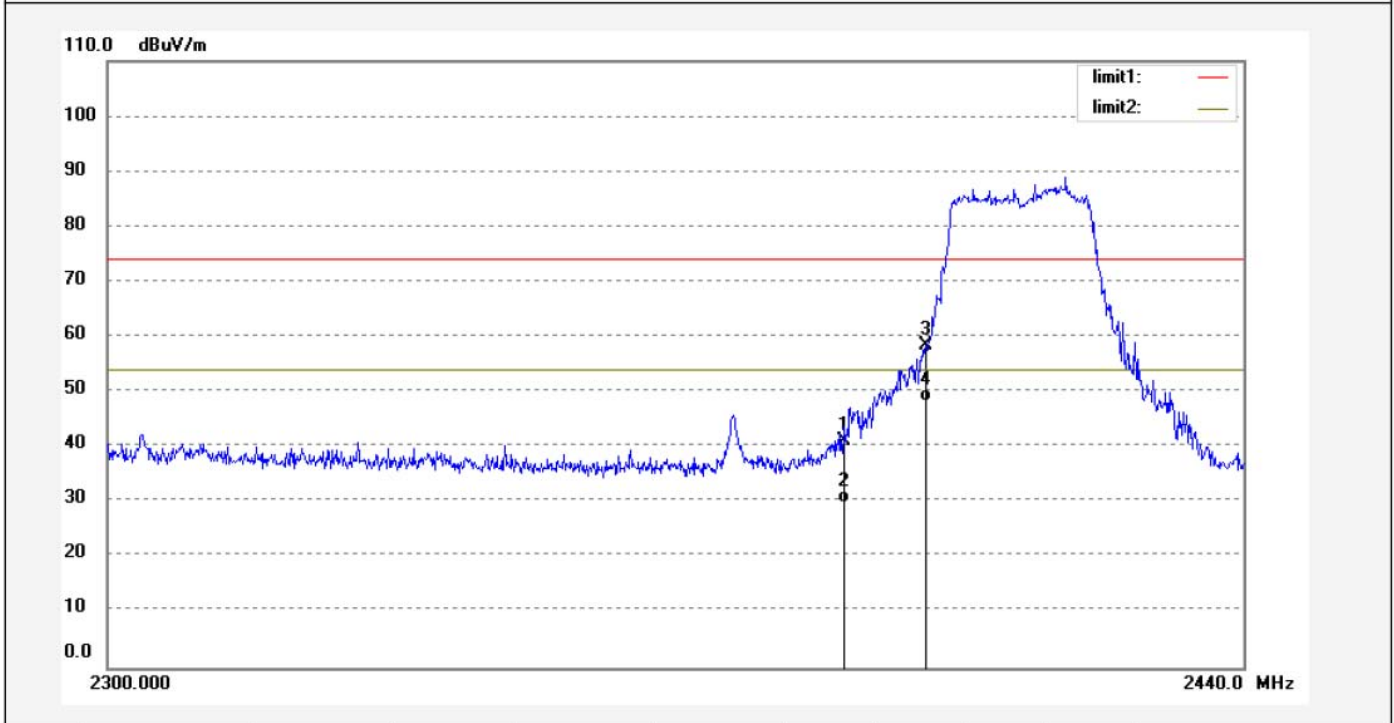

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	48.73	-7.53	41.20	74.00	-32.80	peak			
2	2390.000	37.41	-7.53	29.88	54.00	-24.12	peak			
3	2400.000	65.86	-7.46	58.40	74.00	-15.60	peak			
4	2400.000	55.70	-7.46	48.24	54.00	-5.76	peak			

Note: Average measurement with peak detection at No.2&4




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #391	Polarization: Horizontal
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/06/24/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/20/42
EUT: Indoor Air Quality Sensor	Engineer Signature: Star
Mode: TX Channel 11(802.11n20)	Distance: 3m
Model: AAware	
Manufacturer: Mixwell	

Note: Report No.:ATE20151334

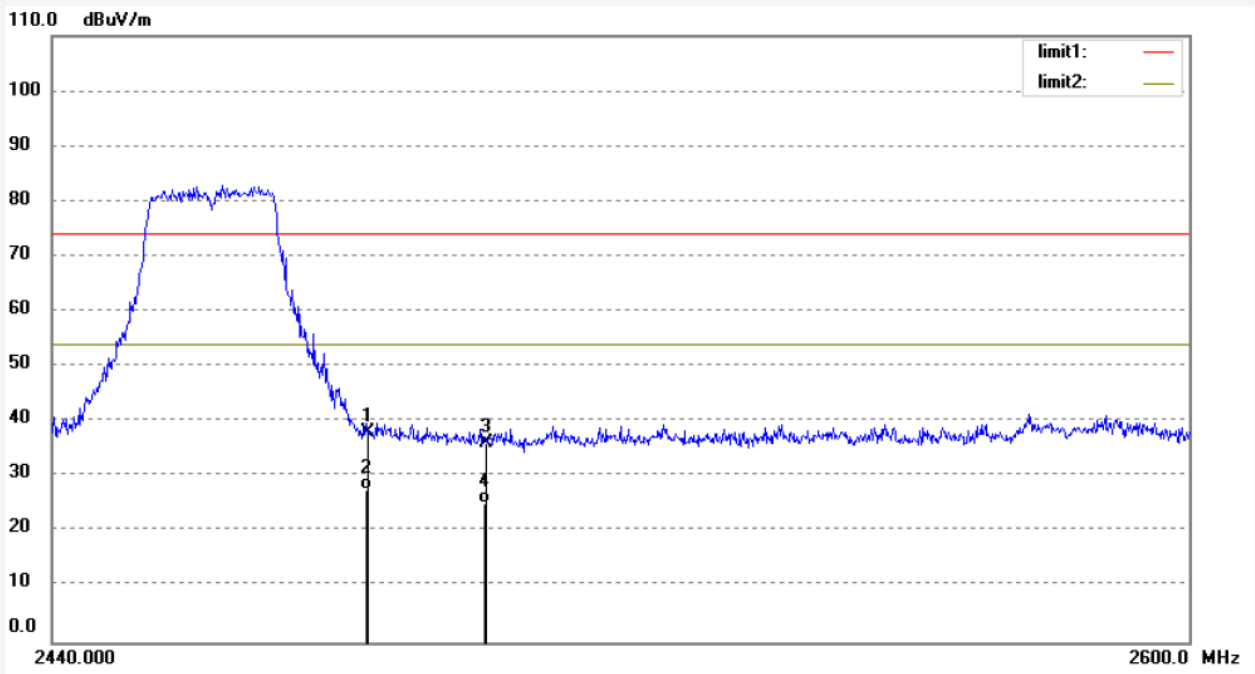

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	45.35	-7.37	37.98	74.00	-36.02	peak			
2	2483.500	35.11	-7.37	27.74	54.00	-26.26	peak			
3	2500.000	43.69	-7.40	36.29	74.00	-37.71	peak			
4	2500.000	32.47	-7.40	25.07	54.00	-28.93	peak			

Note: Average measurement with peak detection at No.2&4




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #390	Polarization: Vertical
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/06/24/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/19/30
EUT: Indoor Air Quality Sensor	Engineer Signature: Star
Mode: TX Channel 11(802.11n20)	Distance: 3m
Model: AAware	
Manufacturer: Mixwell	

Note: Report No.:ATE20151334

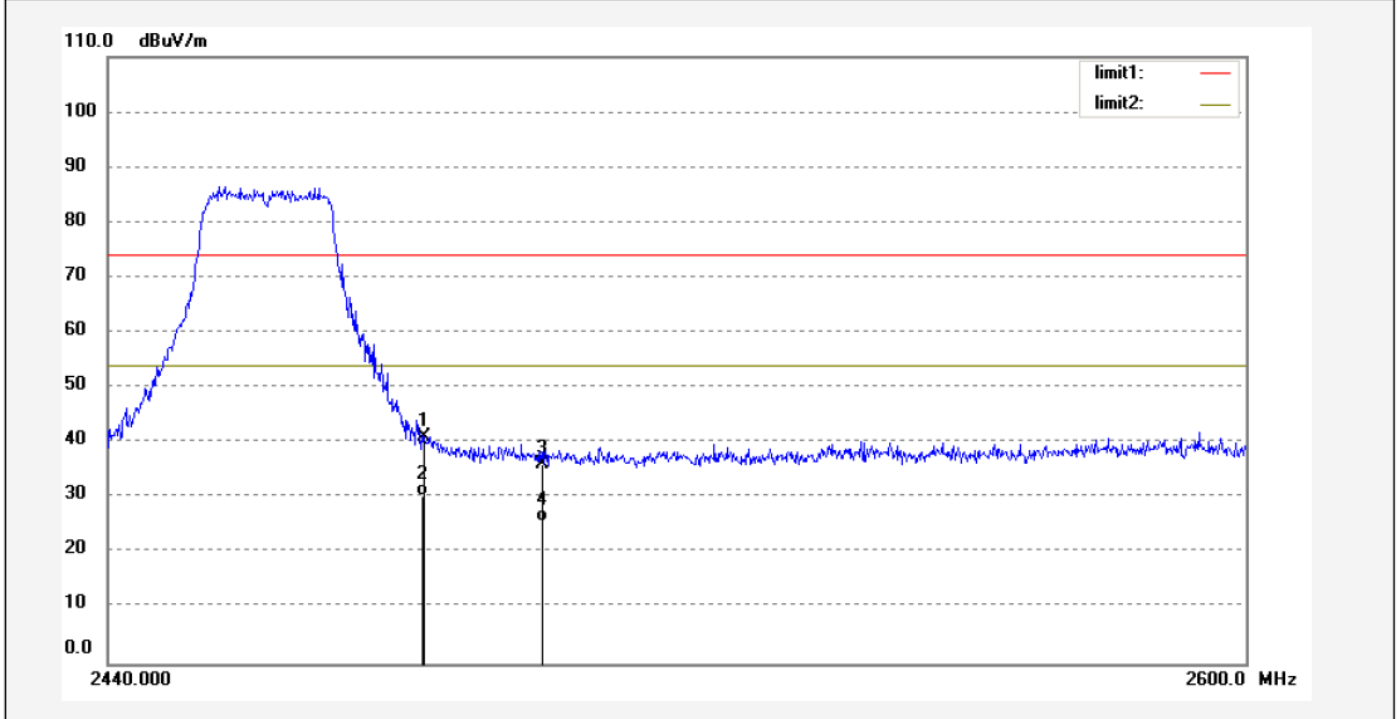


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	48.47	-7.37	41.10	74.00	-32.90	peak			
2	2483.500	37.81	-7.37	30.44	54.00	-23.56	peak			
3	2500.000	43.62	-7.40	36.22	74.00	-37.78	peak			
4	2500.000	33.22	-7.40	25.82	54.00	-28.18	peak			

Note: Average measurement with peak detection at No.2&4

Job No.: Star_tmp #395	Polarization: Horizontal
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/06/24/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/26/16
EUT: Indoor Air Quality Sensor	Engineer Signature: Star
Mode: TX Channel 3(802.11n)40MHz	Distance: 3m
Model: AAware	
Manufacturer: Mixwell	

Note: Report No.:ATE20151334

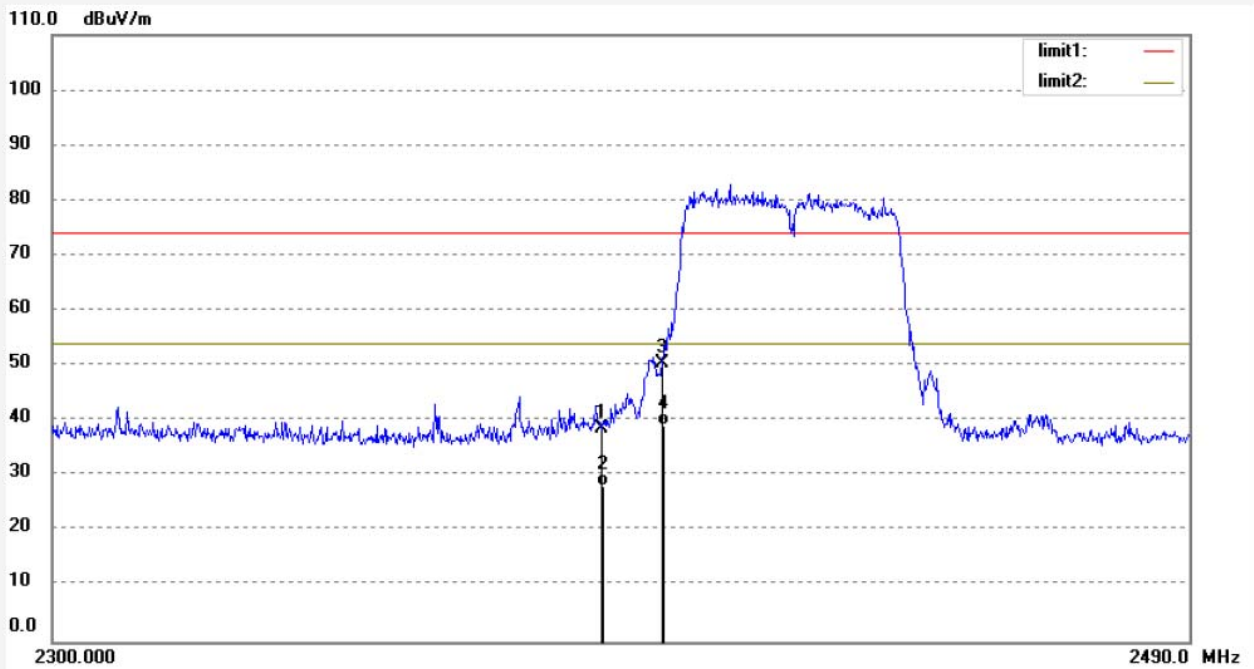


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	46.24	-7.53	38.71	74.00	-35.29	peak			
2	2390.000	35.60	-7.53	28.07	54.00	-25.93	peak			
3	2400.000	57.97	-7.46	50.51	74.00	-23.49	peak			
4	2400.000	46.57	-7.46	39.11	54.00	-14.89	peak			

Note: Average measurement with peak detection at No.2&4

Job No.: Star_tmp #394	Polarization: Vertical
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/06/24/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/25/04
EUT: Indoor Air Quality Sensor	Engineer Signature: Star
Mode: TX Channel 3(802.11n)40MHz	Distance: 3m
Model: AAware	
Manufacturer: Mixwell	

Note: Report No.:ATE20151334

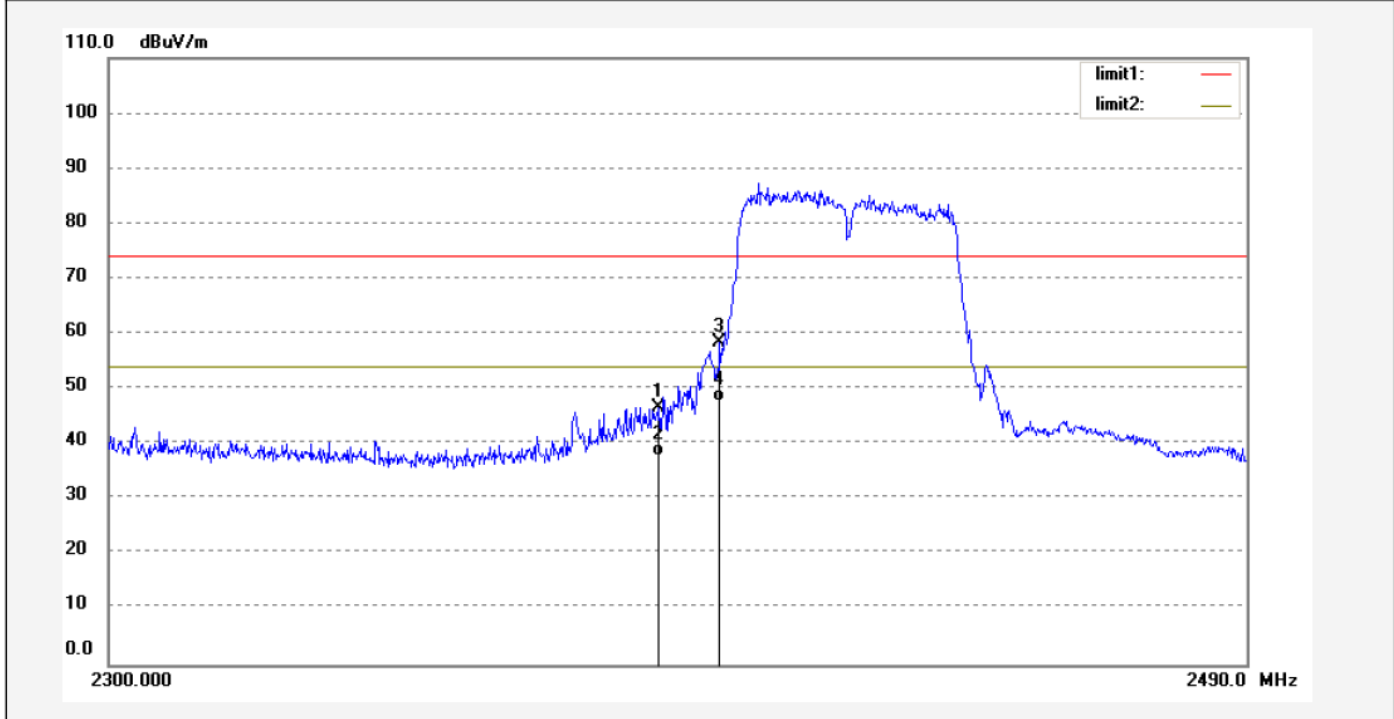


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	54.18	-7.53	46.65	74.00	-27.35	peak			
2	2390.000	45.31	-7.53	37.78	54.00	-16.22	peak			
3	2400.000	65.90	-7.46	58.44	74.00	-15.56	peak			
4	2400.000	55.10	-7.46	47.64	54.00	-6.36	peak			

Note: Average measurement with peak detection at No.2&4

Job No.: Star_tmp #392	Polarization: Horizontal
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/06/24/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/22/19
EUT: Indoor Air Quality Sensor	Engineer Signature: Star
Mode: TX Channel 9(802.11n)40MHz	Distance: 3m
Model: AAware	
Manufacturer: Mixwell	

Note: Report No.:ATE20151334

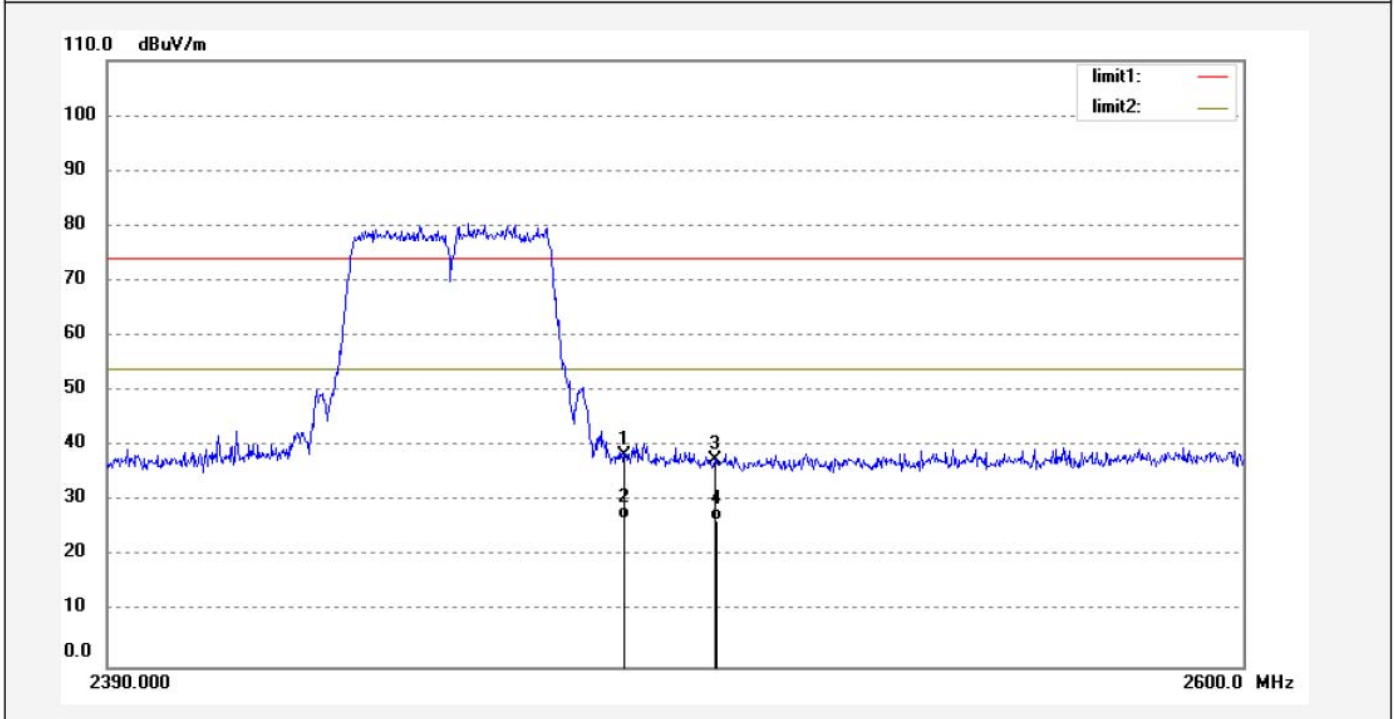

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	45.82	-7.37	38.45	74.00	-35.55	peak			
2	2483.500	34.21	-7.37	26.84	54.00	-27.16	peak			
3	2500.000	44.83	-7.40	37.43	74.00	-36.57	peak			
4	2500.000	33.97	-7.40	26.57	54.00	-27.43	peak			

Note: Average measurement with peak detection at No.2&4




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #393	Polarization: Vertical
Standard: FCC 15C PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/06/24/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 4/23/32
EUT: Indoor Air Quality Sensor	Engineer Signature: Star
Mode: TX Channel 9(802.11n)40MHz	Distance: 3m
Model: AAware	
Manufacturer: Mixwell	

Note: Report No.:ATE20151334

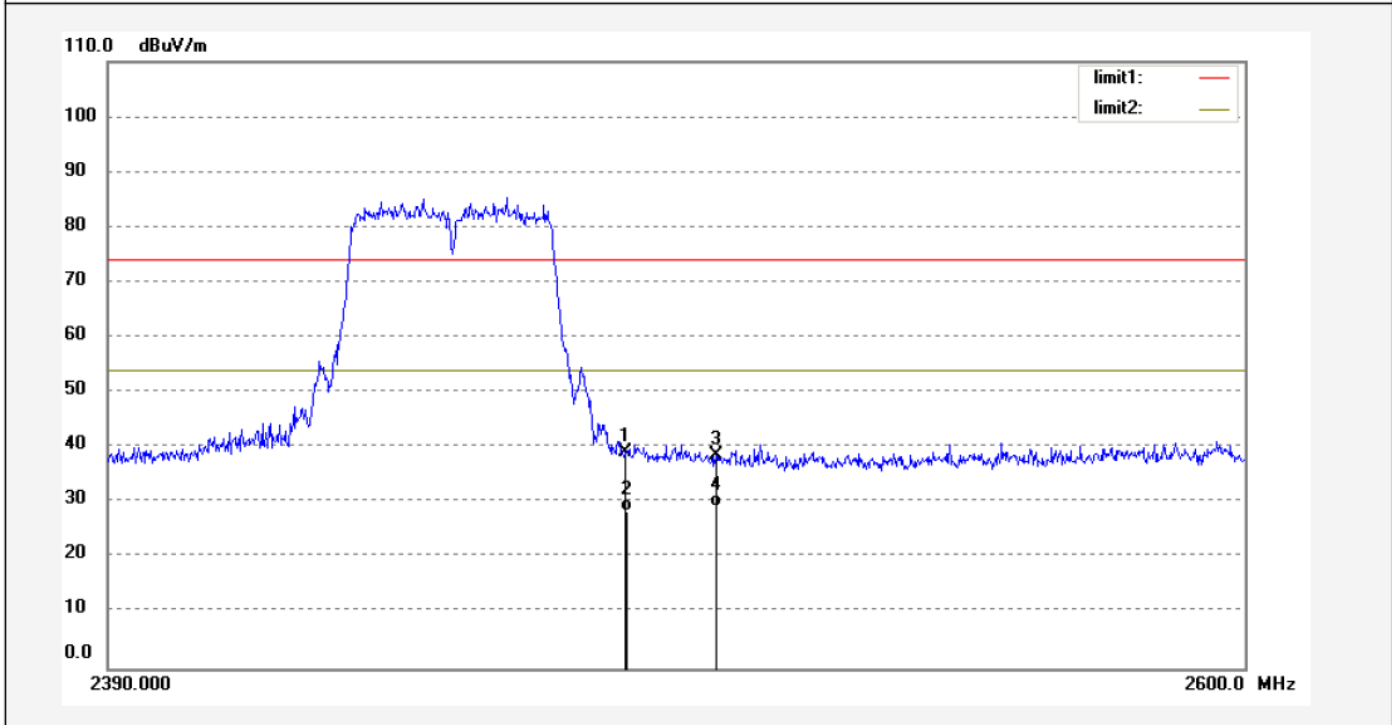


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	46.57	-7.37	39.20	74.00	-34.80	peak			
2	2483.500	35.70	-7.37	28.33	54.00	-25.67	peak			
3	2500.000	46.05	-7.40	38.65	74.00	-35.35	peak			
4	2500.000	36.61	-7.40	29.21	54.00	-24.79	peak			

Note: Average measurement with peak detection at No.2&4


10. RADIATED SPURIOUS EMISSION TEST

10.1. Block Diagram of Test Setup

10.1.1. Block diagram of connection between the EUT and peripherals

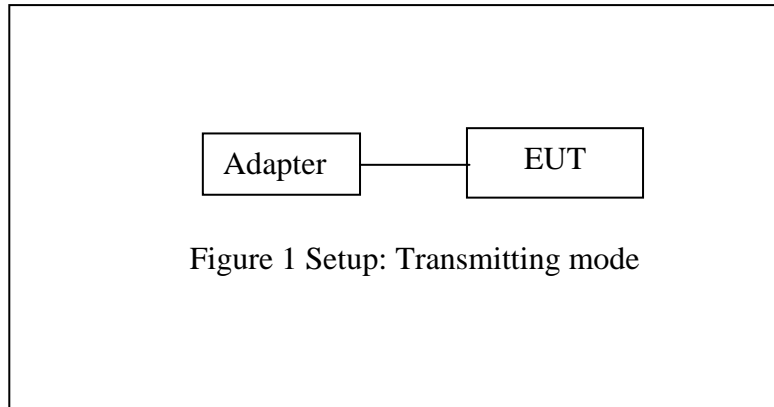


10.1.2. Semi-Anechoic Chamber Test Setup Diagram

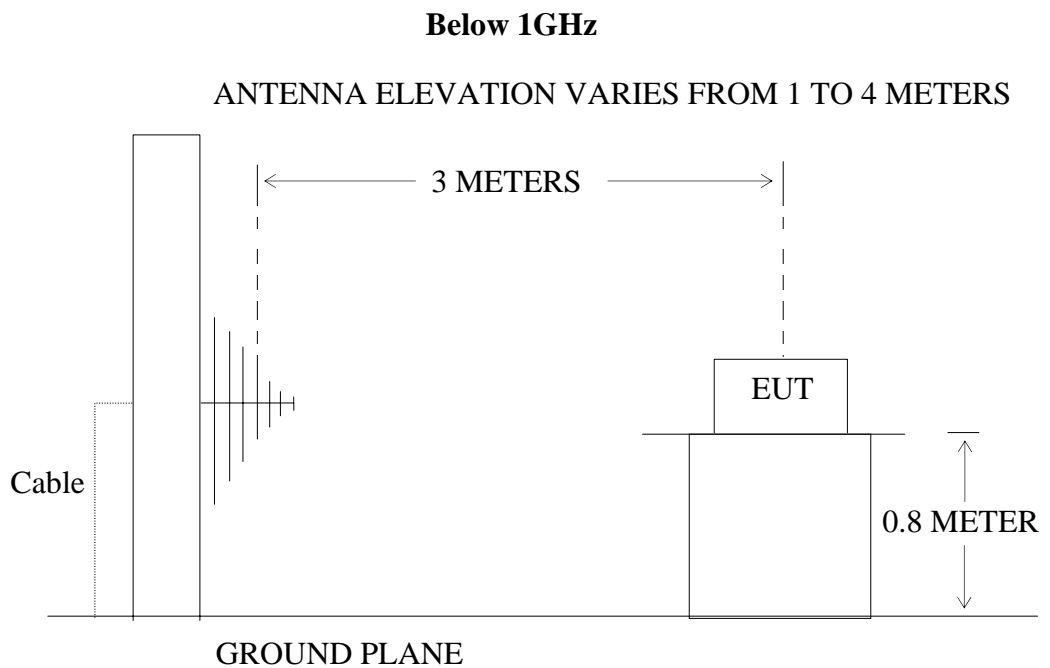

Above 1GHz

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

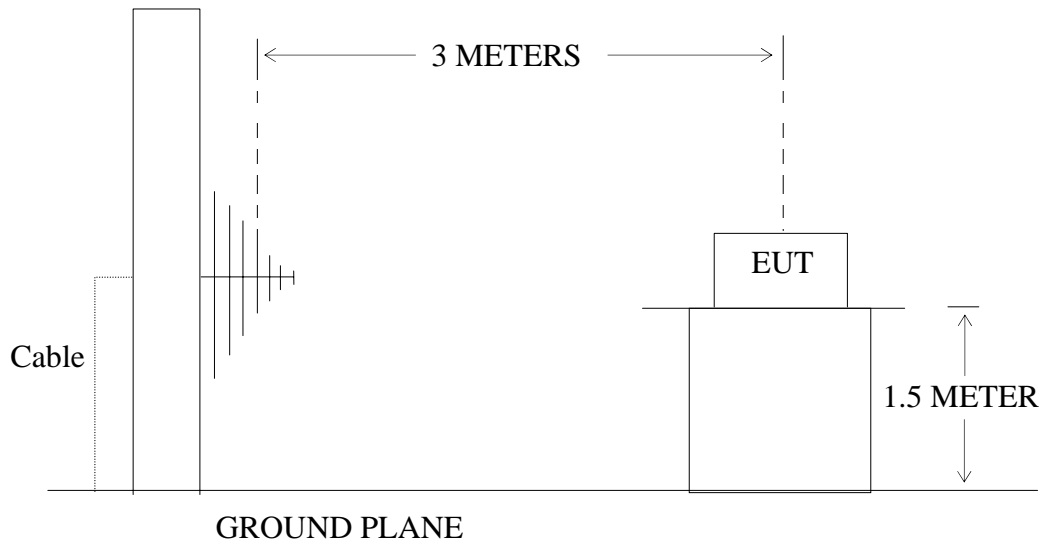

10.2. The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3.Restricted bands of operation

10.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

10.4.Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.5. Operating Condition of EUT

10.5.1. Setup the EUT and simulator as shown as Section 10.1.

10.5.2. Turn on the power of all equipment.

10.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

10.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground (Below 1GHz). The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground (Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The worst-case data rate for this channel to be 1Mbps for 802.11b mode and 6Mbps for 802.11g mode and 150Mbps for 802.11n mode, based on previous with 802.11 WLAN product design architectures.

The frequency range from 30MHz to 25000MHz is checked.

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

During the radiated emission test, the spectrum analyzer was set with the following configurations:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

10.7. The Field Strength of Radiation Emission Measurement Results

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.

4. The EUT is tested radiation emission at each test mode (802.11 b/g/n) in three axes. The worst emissions are reported in all test mode and channels.

5. The radiation emissions from 18-25GHz are not reported, because the test values lower than the limits of 20dB.

Below 1G




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star2015 #276	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/06/22
Temp.(C)/Hum.(%) 23 C / 48 %	Time: 15:33:08
EUT: Indoor Air Quality Sensor	Engineer Signature: Star
Mode: TX Channel 1(802.11b)	Distance: 3m
Model: AAware	
Manufacturer: Mixwell	

Note: Report No.:ATE20151334

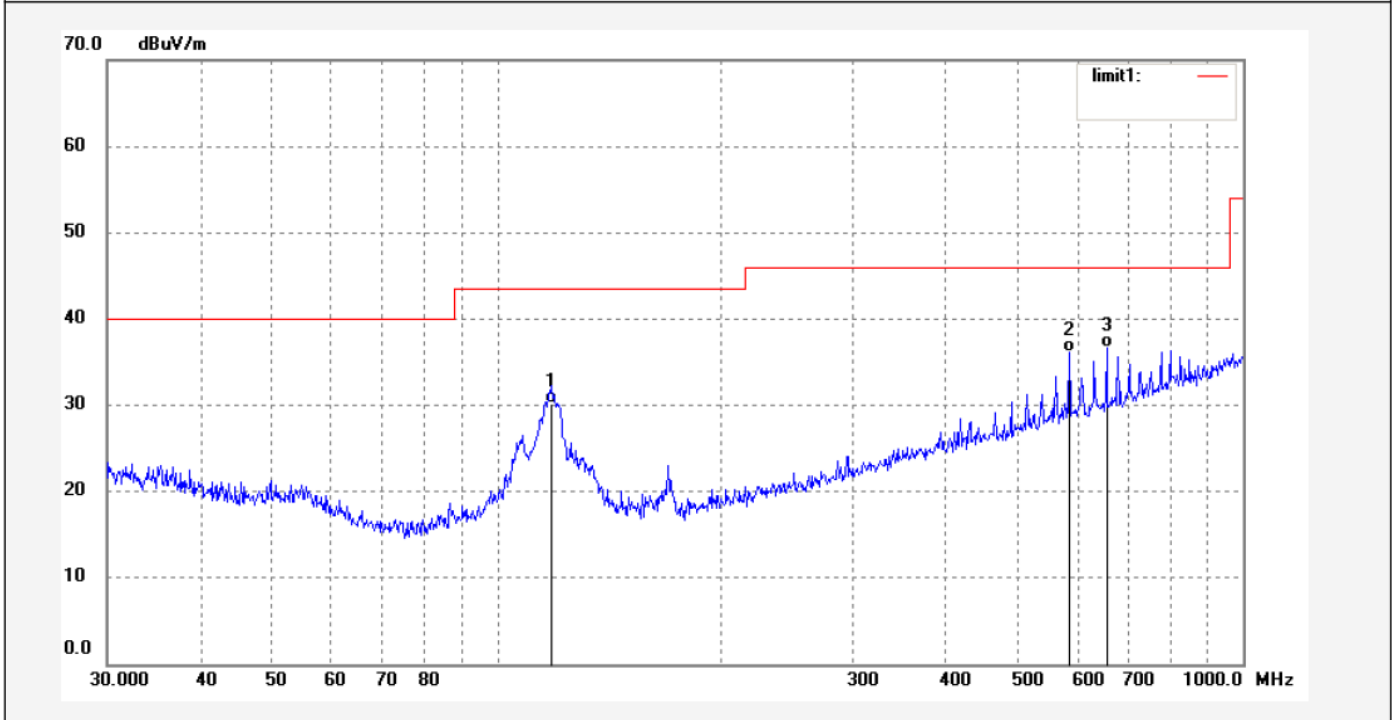


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	118.1862	44.31	-14.15	30.16	43.50	-13.34	QP			
2	584.7895	40.21	-4.10	36.11	46.00	-9.89	QP			
3	656.5300	39.96	-3.31	36.65	46.00	-9.35	QP			

Job No.: star2015 #275
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Indoor Air Quality Sensor
Mode: TX Channel 1(802.11b)
Model: AAware
Manufacturer: Mixwell

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2015/06/22
Time: 15:30:18
Engineer Signature: Star
Distance: 3m

Note: Report No.:ATE20151334

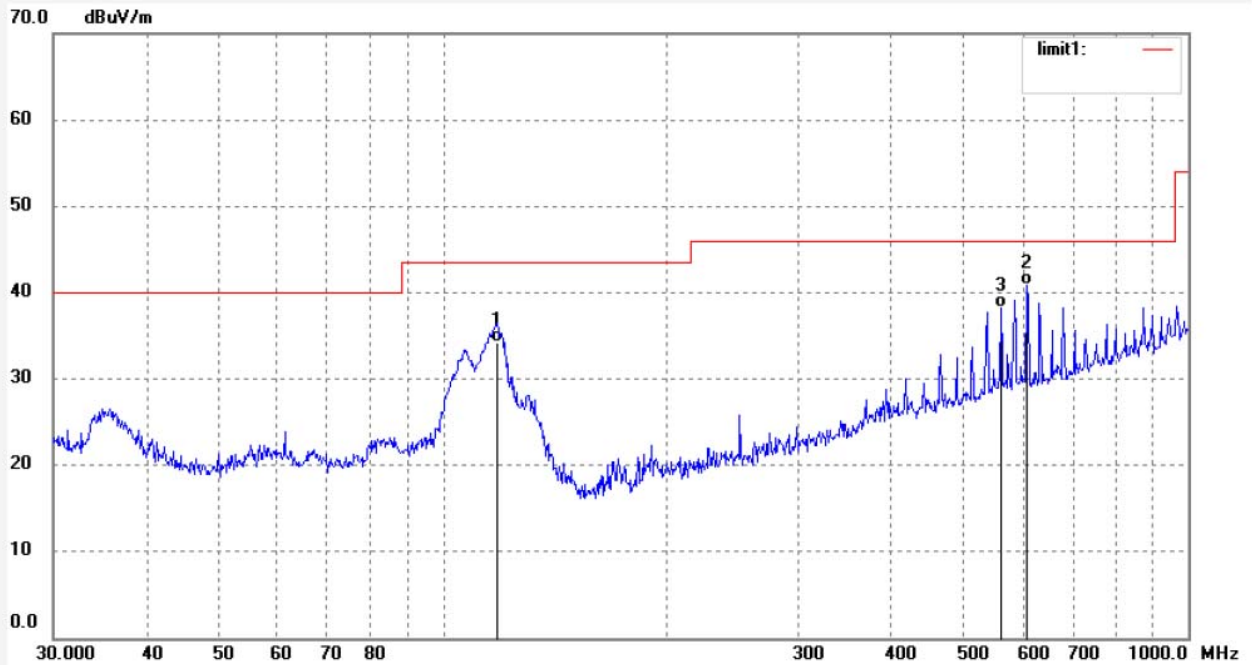

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	118.1861	48.30	-14.15	34.15	43.50	-9.35	QP			
2	607.7866	44.72	-3.84	40.88	46.00	-5.12	QP			
3	560.6928	42.76	-4.45	38.31	46.00	-7.69	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star2015 #277
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Indoor Air Quality Sensor
Mode: TX Channel 6(802.11b)
Model: AAware
Manufacturer: Mixwell

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2015/06/22
Time: 15:37:51
Engineer Signature: Star
Distance: 3m


Note: Report No.:ATE20151334

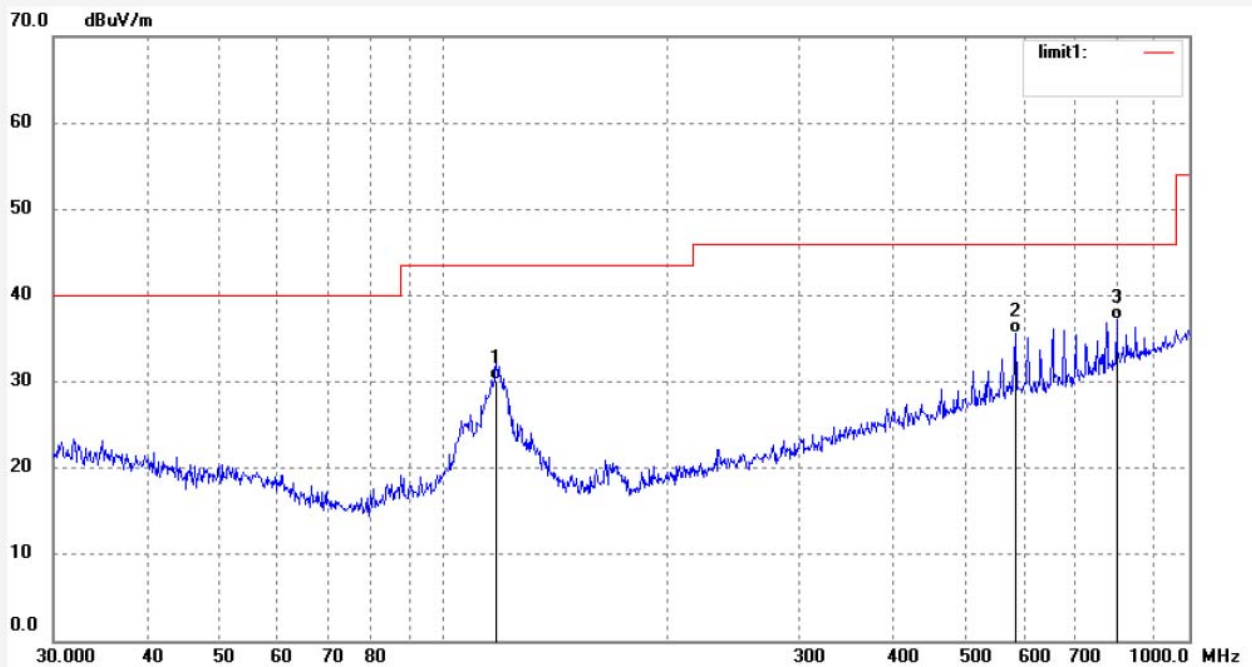

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	117.7724	44.30	-14.14	30.16	43.50	-13.34	QP			
2	584.7894	39.72	-4.09	35.63	46.00	-10.37	QP			
3	798.9796	38.18	-0.98	37.20	46.00	-8.80	QP			

Job No.: star2015 #278	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/06/22
Temp.(C)/Hum.(%) 23 C / 48 %	Time: 15:40:08
EUT: Indoor Air Quality Sensor	Engineer Signature: Star
Mode: TX Channel 6(802.11b)	Distance: 3m
Model: AAware	
Manufacturer: Mixwell	

Note: Report No.:ATE20151334

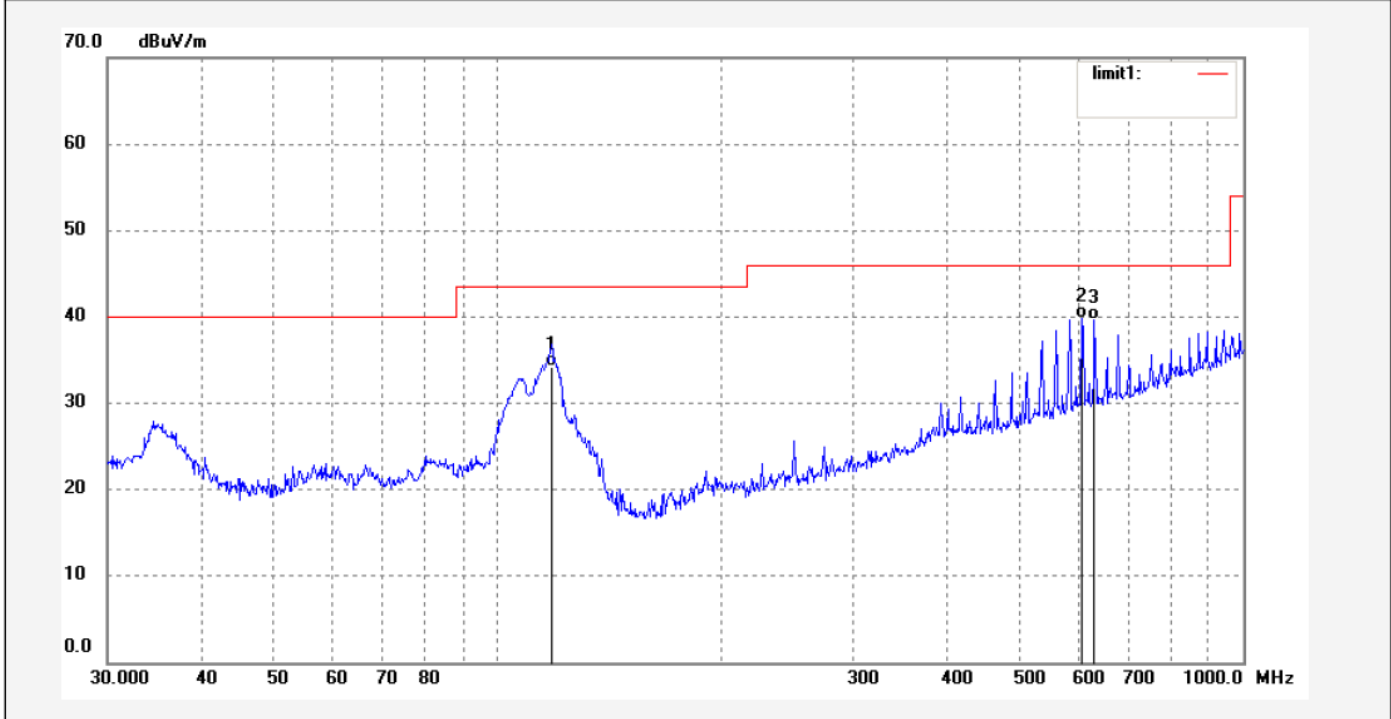

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	118.1861	48.30	-14.15	34.15	43.50	-9.35	QP			
2	607.7866	43.72	-3.84	39.88	46.00	-6.12	QP			
3	631.6884	43.20	-3.57	39.63	46.00	-6.37	QP			