

FCC TEST REPORT

For

Beijing Nanbao Technology Co., Ltd.

Kisslink Pro

Model No.: NB7532

Prepared for : Beijing Nanbao Technology Co., Ltd.
Address : Room 8476, Floor 8, Building 3, No. 30, Shixing Street, Shijingshan District, Beijing, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1F., Xingyuan Industrial Park, Tongda Road, Bao'an Blvd., Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : December 01, 2016
Number of tested samples : 1
Serial number : Prototype
Date of Test : December 01, 2016~March 15, 2017
Date of Report : March 15, 2017

FCC TEST REPORT
FCC CFR 47 PART 15 E(15.407): 2016

Report Reference No. : **LCS1611091084E**

Date of Issue : March 15, 2017

Testing Laboratory Name..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address : 1F., Xingyuan Industrial Park, Tongda Road, Bao'an Blvd.,
 Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure..... : Full application of Harmonised standards
 Partial application of Harmonised standards
 Other standard testing method

Applicant's Name..... : **Beijing Nanbao Technology Co., Ltd.**

Address : Room 8476, Floor 8, Building 3, No. 30, Shixing Street,
 Shijingshan District, Beijing, China

Test Specification

Standard : FCC CFR 47 PART 15 E(15.407): 2016

Test Report Form No...... : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

EUT Description. : **Kisslink Pro**

Trade Mark : Kisslink

Model/ Type reference..... : NB7532

Ratings : Adapter parameters: Input: AC 100-240V, 50/60Hz, 0.8A Max
 Output: DC 12V/1.5A

Result : **Positive**

Compiled by:




Dick Su / File administrators

Supervised by:



Glin Lu/ Technique principal

Approved by:



Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS1611091084E	<u>March 15, 2017</u> Date of issue
---	--

EUT.....	: Kisslink Pro
Type / Model.....	: NB7532
Applicant.....	: Beijing Nanbao Technology Co., Ltd.
Address.....	: Room 8476, Floor 8, Building 3, No. 30, Shixing Street, Shijingshan District, Beijing, China
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: Beijing Nanbao Technology Co., Ltd.
Address.....	: Room 8476, Floor 8, Building 3, No. 30, Shixing Street, Shijingshan District, Beijing, China
Telephone.....	: /
Fax.....	: /
Factory.....	: Beijing Nanbao Technology Co., Ltd.
Address.....	: Room 8476, Floor 8, Building 3, No. 30, Shixing Street, Shijingshan District, Beijing, China
Telephone.....	: /
Fax.....	: /

Test Result:	Positive
---------------------	-----------------

The test report merely corresponds to the test sample.
 It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
00	2017-03-15	Initial Issue	Gavin Liang

TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. DESCRIPTION OF DEVICE (EUT)	6
1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS	6
1.3. EXTERNAL I/O PORT	7
1.4. DESCRIPTION OF TEST FACILITY	7
1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY	7
1.6. MEASUREMENT UNCERTAINTY	7
1.7. DESCRIPTION OF TEST MODES	8
2. TEST METHODOLOGY	9
2.1. EUT CONFIGURATION.....	9
2.2. EUT EXERCISE	9
2.3. GENERAL TEST PROCEDURES	9
3. SYSTEM TEST CONFIGURATION.....	10
3.1. JUSTIFICATION.....	10
3.2. EUT EXERCISE SOFTWARE.....	10
3.3. SPECIAL ACCESSORIES	10
3.4. BLOCK DIAGRAM/SCHEMATICS.....	10
3.5. EQUIPMENT MODIFICATIONS	10
3.6. TEST SETUP	10
4. SUMMARY OF TEST RESULTS.....	11
5. TEST RESULT.....	12
5.1. ON TIME AND DUTY CYCLE	12
5.2. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT.....	14
5.3. POWER SPECTRAL DENSITY MEASUREMENT	16
5.4. 99% AND 26dB OCCUPIED BANDWIDTH MEASUREMENT.....	23
5.5. RADIATED EMISSIONS MEASUREMENT.....	30
5.6. POWER LINE CONDUCTED EMISSIONS	43
5.7 UNDESIRABLE EMISSIONS MEASUREMENT	46
5.8. ANTENNA REQUIREMENTS.....	61
6. LIST OF MEASURING EQUIPMENTS.....	63

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Kisslink Pro

Hardware Version : V1.1

Software Version : V1.0

Model Number : NB7532

Power Supply : Adapter parameters: Input: AC 100-240V, 50/60Hz, 0.8A Max
Output: DC 12V/1.5A

Frequency Range : 2412.00~2462.00MHz/2422.00~2452.00MHz;
5180.00-5240.00MHz/5745.00-5825.00MHz

Channel Number : 11 Channels for WIFI 20MHz Bandwidth(802.11b/g/n-HT20)
7 Channels for WIFI 40MHz Bandwidth(802.11n-HT40)
4 Channels for 5180.00-5240.00MHz(802.11a/ac/n-HT20)
2 Channels for 5190.00-5230.00MHz(802.11ac/n-HT40)
1 Channels for 5210.00MHz(802.11ac-HT80)
5 Channels for 5745.00-5825.00MHz(802.11a/ac/n-HT20)
2 Channels for 5755.00-5795.00MHz(802.11ac/n-HT40)
1 Channels for 5775.00MHz(802.11ac-HT80)

Modulation Technology : IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)
IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11n: OFDM (64QAM, 16QAM,QPSK,BPSK)
IEEE 802.11a: OFDM (64QAM, 16QAM,QPSK,BPSK)

Data Rates : IEEE 802.11b: 1-11Mbps
IEEE 802.11g: 6-54Mbps
IEEE 802.11n: MCS0-MCS15
IEEE 802.11a: 6-54Mbps

Antenna Type And Gain : 2.4G WLAN Antenna
Chain0 R-SMA antenna, 3.78 dBi (Max.)
Chain1 R-SMA antenna, 3.78 dBi (Max.)
Chain2 R-SMA antenna, 3.78 dBi (Max.)
5G WLAN Antenna
Chain0 R-SMA antenna, 2.15 dBi (Max.)
Chain1 R-SMA antenna, 2.15 dBi (Max.)

1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
AMIGO	Adapter	AMS115-120150 0FU	--	DoC

1.3. External I/O Port

I/O Port Description	Quantity	Cable
RJ45	3	N/A
DC IN	1	N/A

1.4. Description of Test Facility

CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

VCCI Registration Number. is C-4260 and R-3804.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	1.63dB	(1)
Power disturbance	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

Worst-case mode and channel used for 150 kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power that was determined to be IEEE 802.11a mode (High Channel).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be IEEE 802.11a mode(High Channel).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

- IEEE 802.11a Mode : 6 Mbps, OFDM.
- IEEE 802.11ac VHT20 Mode: MCS0
- IEEE 802.11n HT20 Mode: MCS0, OFDM.
- IEEE 802.11ac VHT40 Mode: MCS0, OFDM.
- IEEE 802.11n HT40 Mode: MCS0, OFDM.
- IEEE 802.11ac VHT80 Mode: MCS0, OFDM.

Antenna & Bandwidth

Antenna	Single (Port.1)			Two (Port.1 + Port.2)		
	20MHz	40MHz	80MHz	20MHz	40MHz	80MHz
IEEE 802.11a	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
IEEE 802.11n	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
IEEE 802.11ac	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure 789033 D02 General UNII Test Procedures New Rules v01r02 and KDB 662911 are required to be used for this kind of FCC 15.407 UII device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E

2.3. General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmits condition.

3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (art2_ver_4_9_844_release_WT200) provided by application.

3.3. Special Accessories

No.	Equipment	Manufacturer	Model No.	Serial No.	Length	shielded/ unshielded	Notes
1	PC	Lenovo	Ideapad	A131101550	/	/	DOC
2	Power adapter	Lenovo	CPA-A090	36200414	1.00m	unshielded	DOC

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart E		
FCC Rules	Description of Test	Result
§15.407(a)	Maximum Conducted Output Power	Compliant
§15.407(a)	Power Spectral Density	Compliant
§15.407(a)	26dB Bandwidth	Compliant
§15.407(a)	99% Occupied Bandwidth	Compliant
§15.407(b)	Radiated Emissions	Compliant
§15.407(b)	Band edge Emissions	Compliant
§15.205	Emissions at Restricted Band	Compliant
§15.407(g)	Frequency Stability	N/A
§15.207(a)	Line Conducted Emissions	Compliant
§15.203	Antenna Requirements	Compliant
§2.1093	RF Exposure	Compliant

Note: The customer declared frequency stability is better than 20ppm which ensures that the signal remains in the allocated bands under all operational conditions stated in the user manual.

5. TEST RESULT

5.1. On Time and Duty Cycle

5.1.1. Standard Applicable

None; for reporting purpose only.


5.1.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of the spectrum analyzer.

5.1.3. Test Procedures

1. Set the centre frequency of the spectrum analyzer to the transmitting frequency;
2. Set the span=0MHz, RBW=8MHz, VBW=50MHz, Sweep time=5ms;
3. Detector = peak;
4. Trace mode = Single hold.

5.1.4. Test Setup Layout





5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.1.6. Test result



Mode	On Time B (ms)	Period (ms)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW(KHz)
IEEE 802.11a	2.027	2.227	1	91.02%	0.409	0.493
IEEE 802.11n HT20	1.900	2.020	1	94.06%	0.266	0.526
IEEE 802.11ac HT20	1.899	1.985	1	95.67%	0.192	0.527
IEEE 802.11n HT40	0.936	1.007	1	92.95%	0.318	1.068
IEEE 802.11ac HT40	1.899	1.985	1	95.67%	0.192	0.527
IEEE 802.11ac HT80	0.456	0.522	1	87.36%	0.587	2.193

On Time and Duty Cycle

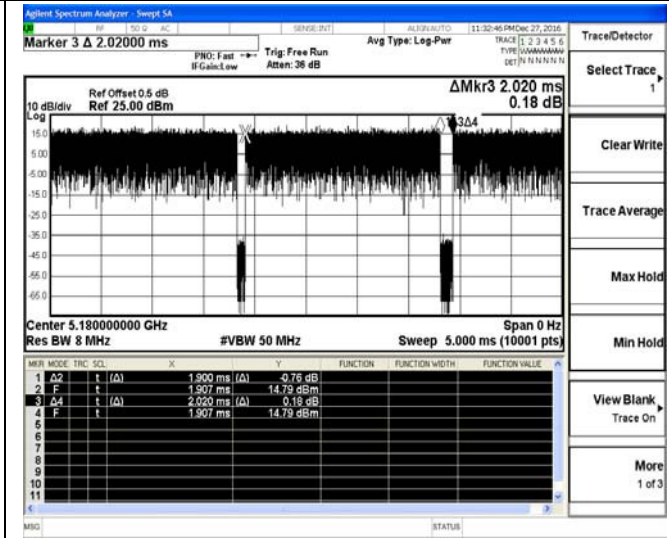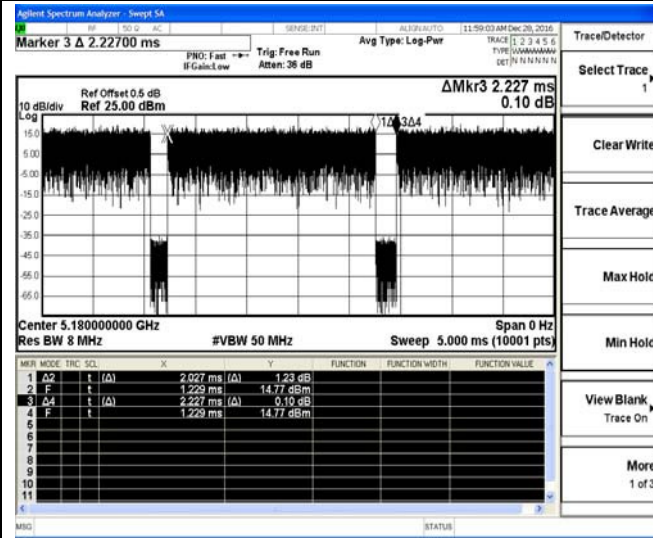



IEEE 802.11a

IEEE 802.11n HT20

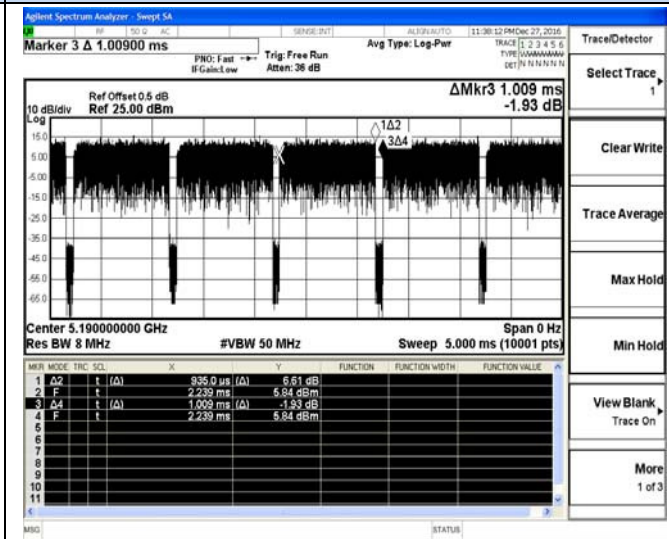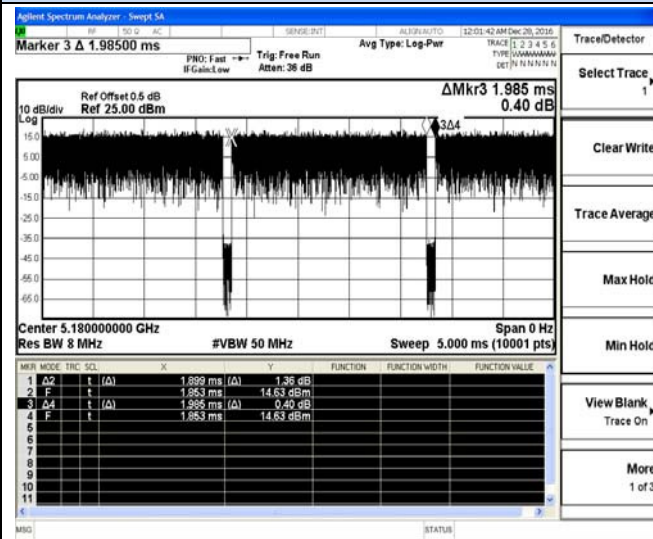

IEEE 802.11ac VHT20

IEEE 802.11n HT40

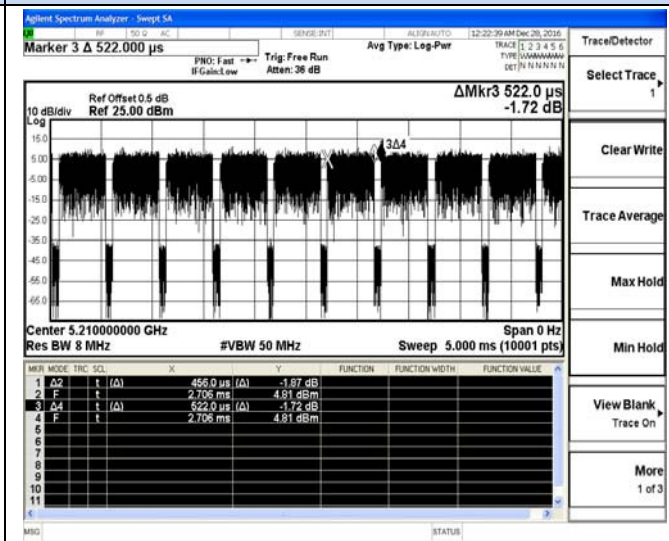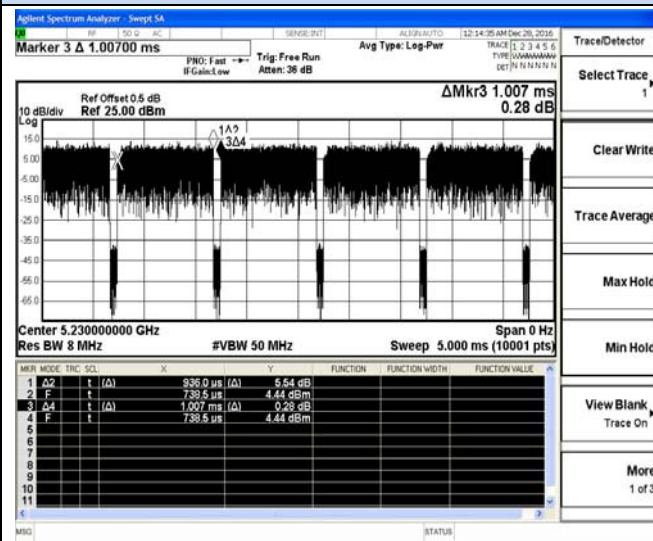

IEEE 802.11ac VHT40

IEEE 802.11ac VHT80

5.2. Maximum Conducted Output Power Measurement

5.2.1. Standard Applicable

(1) For the band 5.15-5.25 GHz.

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of the power meter.

5.2.3. Test Procedures


The transmitter output (antenna port) was connected to the power meter.

According to KDB 789033 D02 Section 3 (a) Method PM (Measurement using an RF average power meter):

- (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.
- The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
 - At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 - The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- (ii) If the transmitter does not transmit continuously, measure the duty cycle, x , of the transmitter output signal as described in section II.B.

- (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25%).

5.2.4. Test Setup Layout

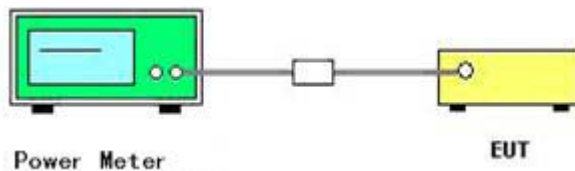

5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.2.6. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	60%
Test Engineer	Dick	Configurations	IEEE 802.11a/n/ac

Test Mode	Channel	Frequency (MHz)	Measured Conducted Average Power (dBm)			Duty Cycle factor (dB)	Report Average Power (dBm)			Limits (dBm)	Verdict
			Antenna 0	Antenna 1	Sum		Antenna 0	Antenna 1	Sum		
IEEE 802.11a	36	5180	11.31	11.86	/	0.409	11.719	12.269	/	30.00	PASS
	40	5200	11.26	11.58	/	0.409	11.669	11.989	/		
	48	5240	11.19	11.54	/	0.409	11.599	11.949	/		
IEEE 802.11n HT20	36	5180	10.90	10.78	13.85	0.266	11.166	11.046	14.116	30.00	PASS
	40	5200	10.70	10.44	13.58	0.266	10.966	10.706	13.846		
	48	5240	10.81	10.51	13.67	0.266	11.076	10.776	13.936		
IEEE 802.11ac VHT20	36	5180	10.89	10.79	13.85	0.192	11.082	10.982	14.042	30.00	PASS
	40	5200	10.77	10.52	13.66	0.192	10.962	10.712	13.852		
	48	5240	10.70	10.46	13.59	0.192	10.892	10.652	13.782		
IEEE 802.11n HT40	38	5190	10.25	10.96	13.63	0.318	10.568	11.278	13.948	30.00	PASS
	46	5230	10.26	10.13	13.21	0.318	10.578	10.448	13.528		
IEEE 802.11ac VHT40	38	5190	10.89	10.70	13.81	0.192	11.082	10.892	14.002	30.00	PASS
	46	5230	10.78	10.67	13.74	0.192	10.972	10.862	13.932		
IEEE 802.11ac VHT80	42	5210	10.34	10.17	13.27	0.587	10.927	10.757	13.857	30.00	PASS

Remark:

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11a VHT20, IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;
4. For MIMO with CCD technology device, The Directional Gain= Gain of individual transmit antennas (dBi) + Array gain;
 $Array\ gain = 10 \log (N_{ant})$, where N_{ant} is the number of transmit antennas.
5. Directional Gain = $2.15 + 10 \log (2) = 5.16\ dBi < 6\ dBi$; no need reduce power limit;
6. Report conducted power = Measured conducted average power + Duty Cycle factor;

5.3. Power Spectral Density Measurement

5.3.1. Standard Applicable

For 5150~5250MHz

- (i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}
- (ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}
- (iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
- (iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 MHz band.^{note1}

Note1: If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3.2. Measuring Instruments and Setting


Please refer to section 6 of equipment list in this report. The following table is the setting of Spectrum Analyzer.

5.3.3. Test Procedures

1. The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
3. Set the RBW = 1MHz.
4. Set the VBW \geq 3MHz
5. Span=Encompass the entire emissions bandwidth (EBW) of the signal (or, alternatively, the entire 99% occupied bandwidth) of the signal.
6. Number of points in sweep $\geq 2 \times$ span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
7. Manually set sweep time $\geq 10 \times$ (number of points in sweep) \times (total on/off period of the transmitted signal).
8. Set detector = power averaging (rms).
9. Sweep time = auto couple.
10. Trace mode = max hold.
11. Allow trace to fully stabilize.
12. Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively,
13. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log (1/0.25) = 6$ dB if the duty cycle is 25%.
14. Use the peak marker function to determine the maximum power level in any 1MHz band

segment within the fundamental EBW.

5.3.4. Test Setup Layout

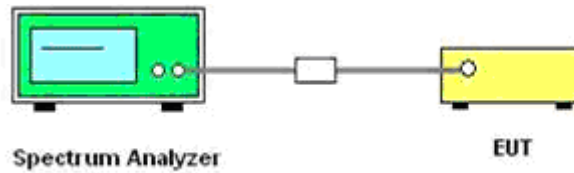

5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

6.3.6. Test Result of Power Spectral Density

Temperature	25°C	Humidity	60%
Test Engineer	Dick	Configurations	IEEE 802.11a/n/ac


Test Mode	Channel	Frequency (MHz)	Measured Conducted PSD (dBm)			Array Gain (dB)	Duty Cycle factor (dB)	Report Conducted PSD (dBm)			PSD Limits (dBm)	Verdict
			Antenna 0	Antenna 1	Sum			Antenna 0	Antenna 1	Sum		
IEEE 802.11a	36	5180	0.328	0.271	/	0	0.409	0.737	0.680	/	17.00	PASS
	40	5200	0.266	0.423	/	0	0.409	0.675	0.832	/		
	48	5240	0.022	0.192	/	0	0.409	0.431	0.601	/		
IEEE 802.11n HT20	36	5180	0.174	0.318	3.257	3.010	0.266	0.44	0.584	3.523	17.00	PASS
	40	5200	0.145	0.114	3.140	3.010	0.266	0.411	0.380	3.406		
	48	5240	0.047	0.174	3.121	3.010	0.266	0.313	0.440	3.387		
IEEE 802.11ac VHT20	36	5180	0.595	0.410	3.514	3.010	0.192	0.787	0.602	3.706	17.00	PASS
	40	5200	0.002	0.149	3.086	3.010	0.192	0.194	0.341	3.278		
	48	5240	0.082	0.100	3.101	3.010	0.192	0.274	0.292	3.293		
IEEE 802.11n HT40	38	5190	-3.708	-3.945	-0.815	3.010	0.318	-3.390	-3.627	-0.497	17.00	PASS
	46	5230	-3.386	-3.389	-0.377	3.010	0.318	-3.068	-3.071	-0.059		
IEEE 802.11ac VHT40	38	5190	-3.489	-3.645	-0.556	3.010	0.192	-3.297	-3.453	-0.364	17.00	PASS
	46	5230	-3.132	-3.013	-0.062	3.010	0.192	-2.940	-2.821	0.130		
IEEE 802.11ac VHT80	42	5210	-5.836	-3.855	-1.723	3.010	0.587	-5.249	-3.268	-1.136	17.00	PASS

Remark:


1. Measured power spectrum density at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11a VHT20, IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;
4. For MIMO with CCD technology device, The Directional Gain= Gain of individual transmit antennas (dBi) + Array gain;
 $Array\ gain = 10 \log(N_{ant})$, where N_{ant} is the number of transmit antennas.
5. Directional Gain = $2.15 + 10 \log(2) = 5.16\text{ dBi} < 6\text{dBi}$; no need reduce power spectrum density limit;
6. Report conducted PSD = Measured conducted average power + Duty Cycle factor;
7. Please refer to following test plots;

Power Spectrum Density
IEEE 802.11a


Antenna Chain 0

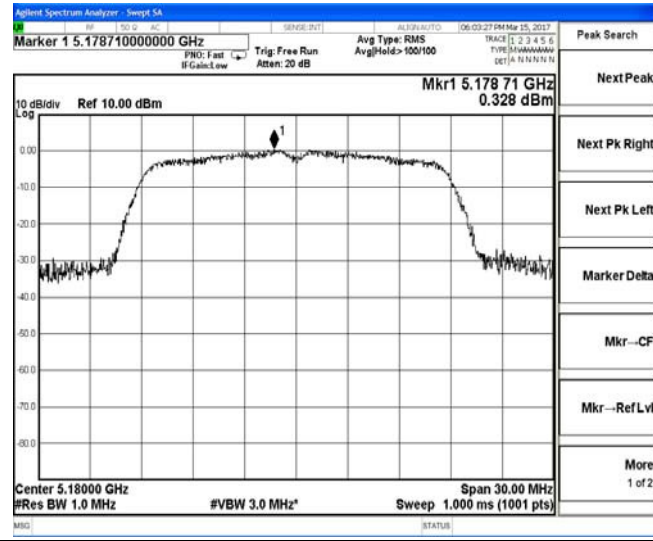


Antenna Chain 1

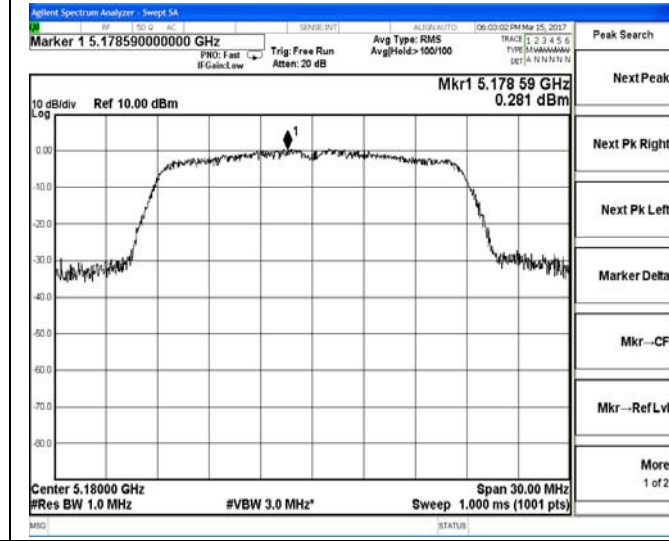


Channel 36 / 5180 MHz

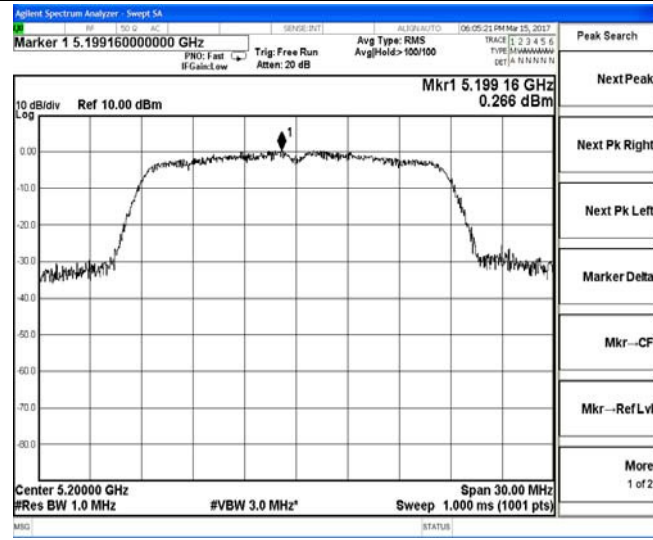


Channel 36 / 5180 MHz

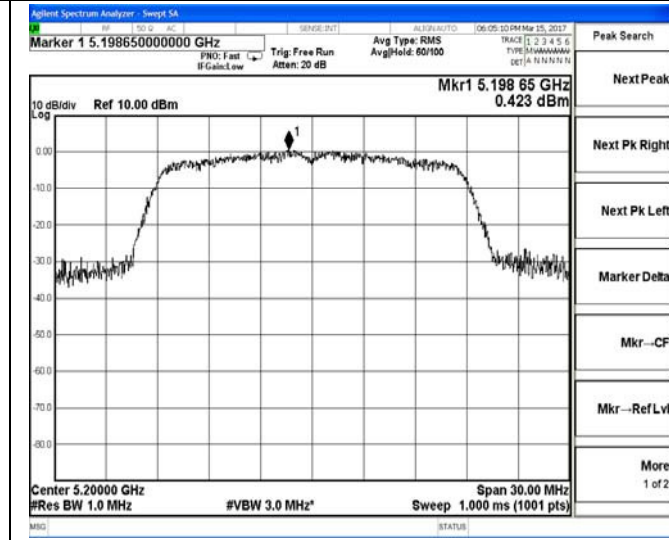

Channel 40 / 5200 MHz

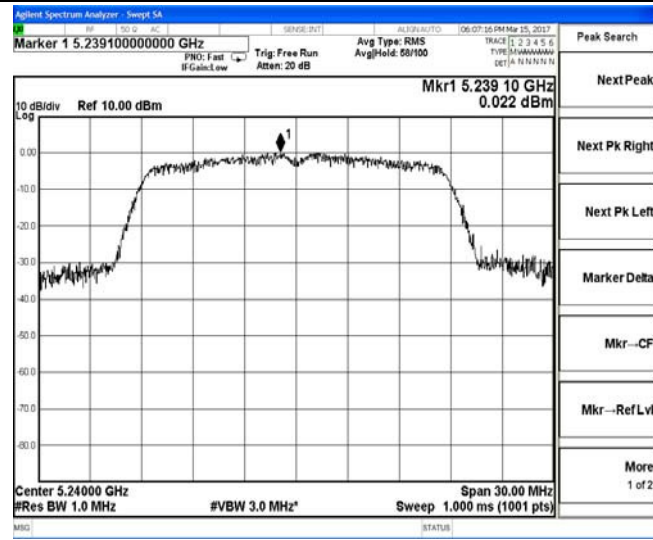

Channel 40 / 5200 MHz

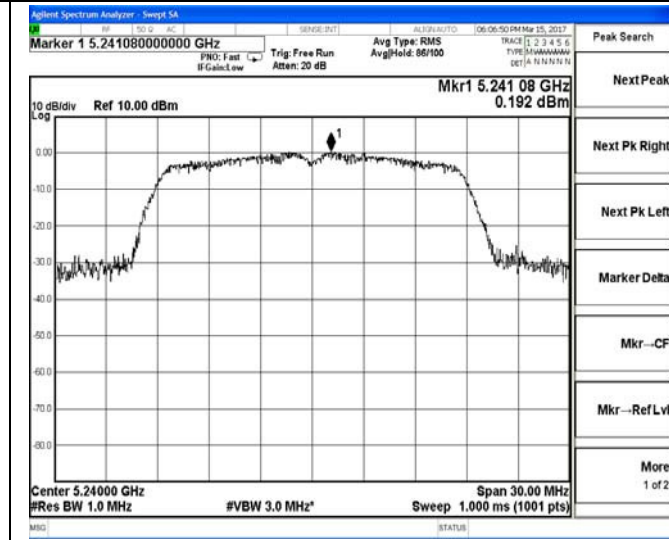


Channel 48 / 5240 MHz


Channel 48 / 5240 MHz

Power Spectrum Density
IEEE 802.11n HT20


Antenna Chain 0

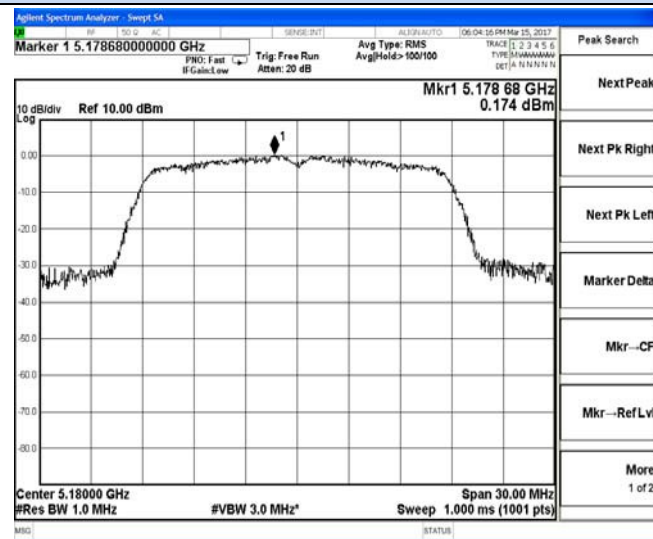


Antenna Chain 1

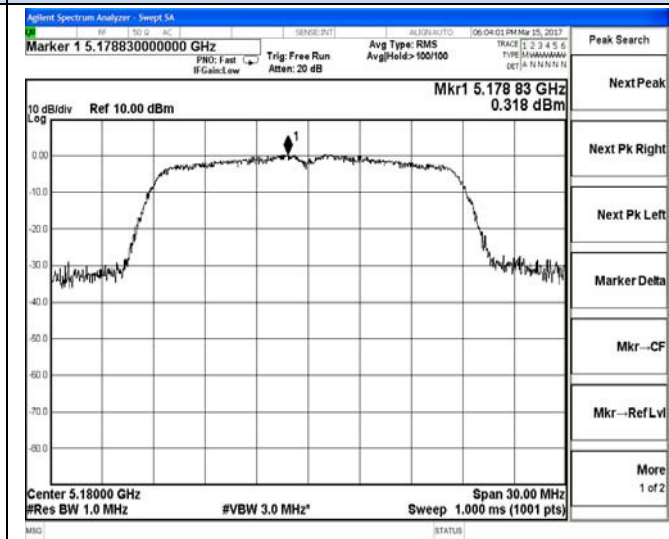


Channel 36 / 5180 MHz

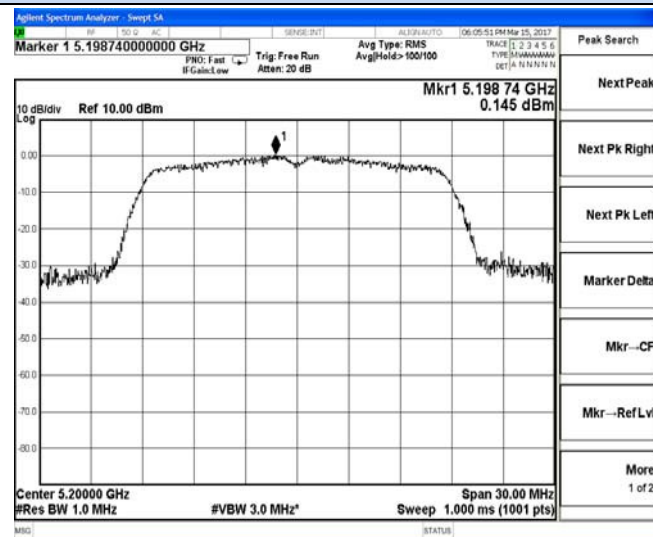


Channel 36 / 5180 MHz

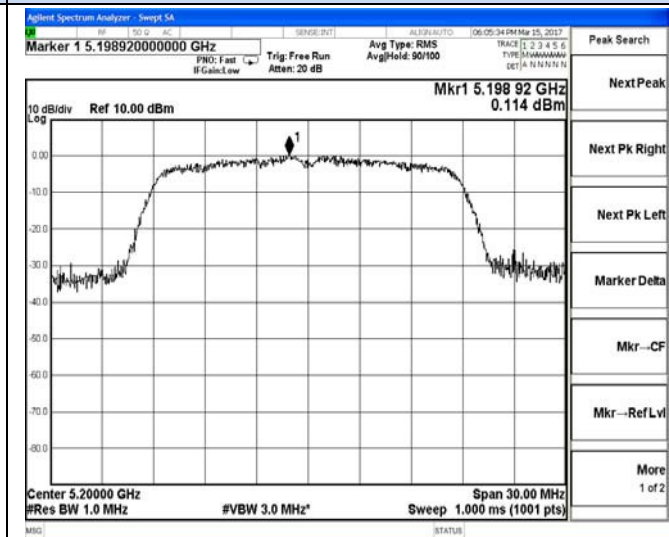

Channel 40 / 5200 MHz

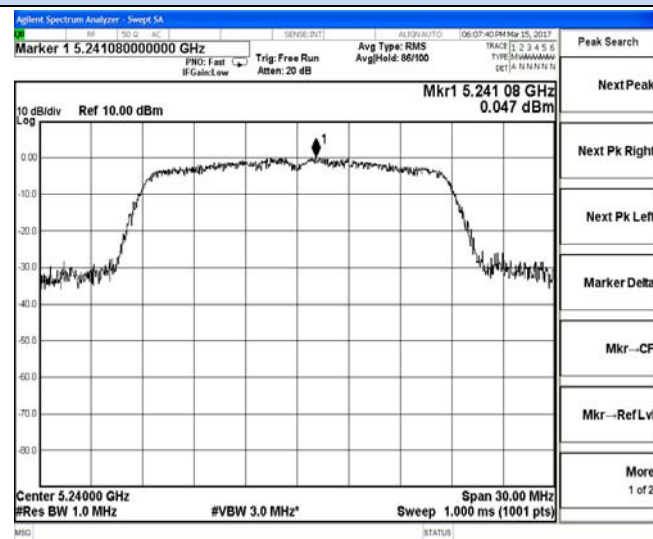

Channel 40 / 5200 MHz

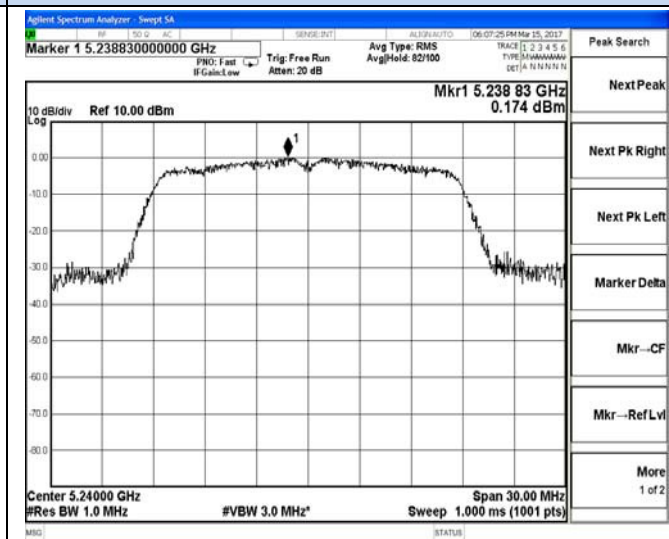



Channel 48 / 5240 MHz

Channel 48 / 5240 MHz

Power Spectrum Density
IEEE 802.11ac VHT20



Antenna Chain 0

Antenna Chain 1

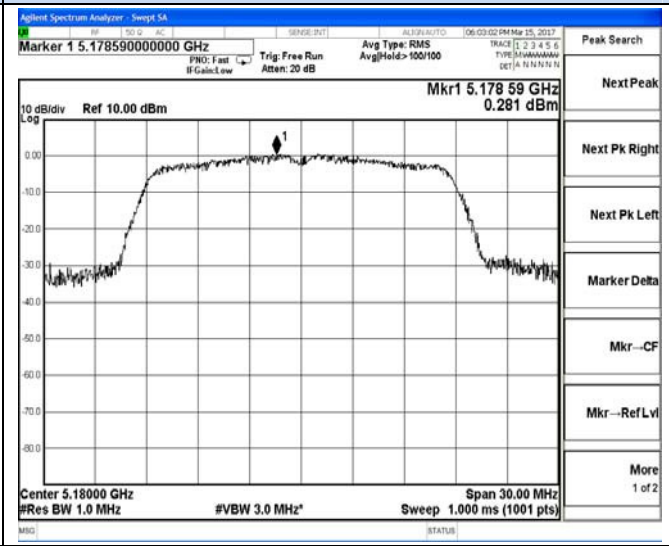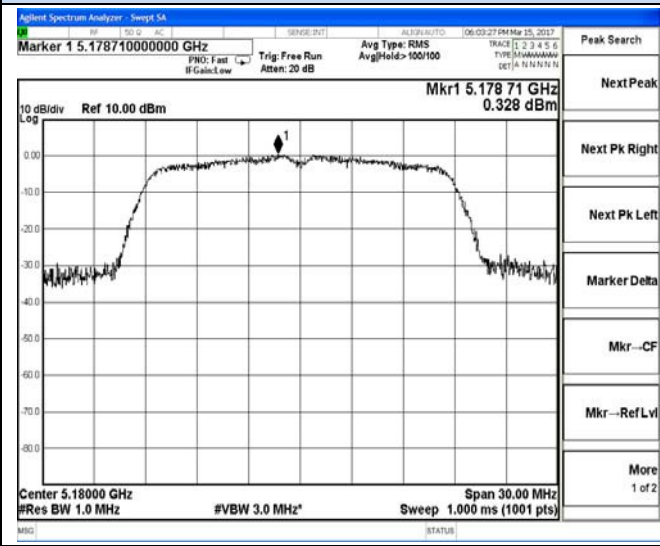



Channel 36 / 5180 MHz

Channel 36 / 5180 MHz

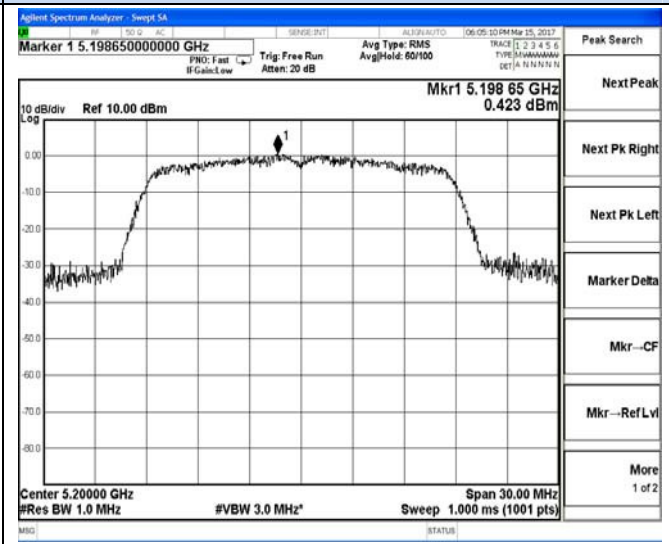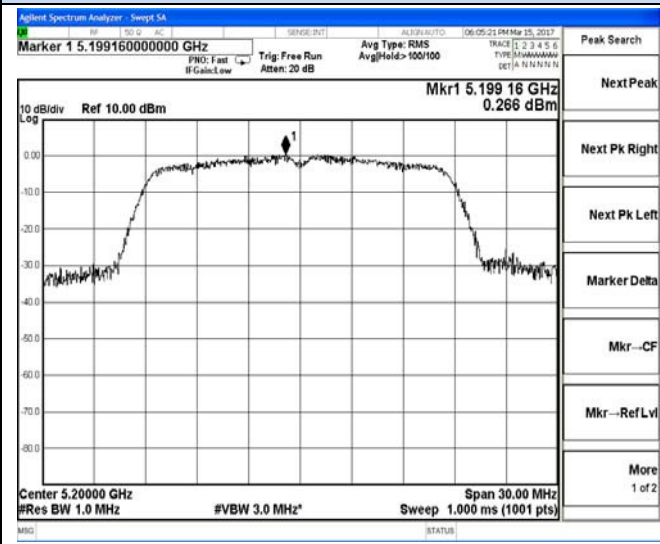

Channel 40 / 5200 MHz

Channel 40 / 5200 MHz

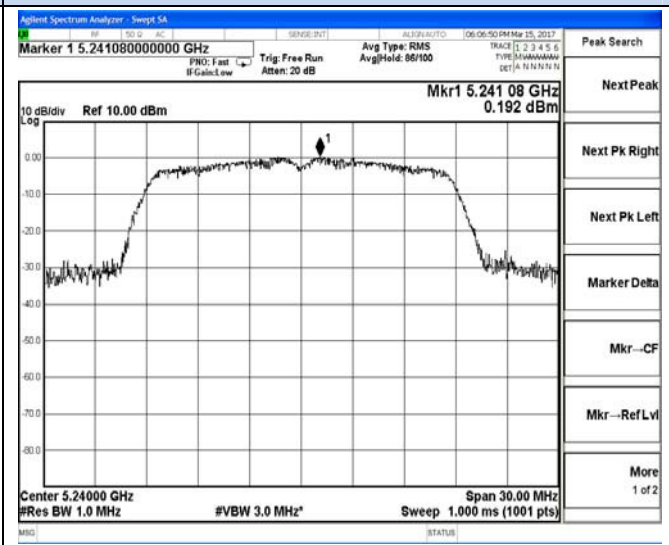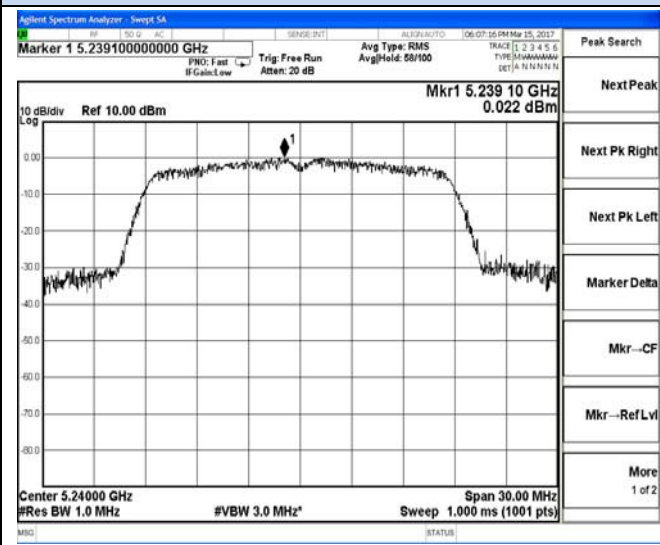



Channel 48 / 5240 MHz

Channel 48 / 5240 MHz

Power Spectrum Density
IEEE 802.11n HT40



Antenna Chain 0

Antenna Chain 1

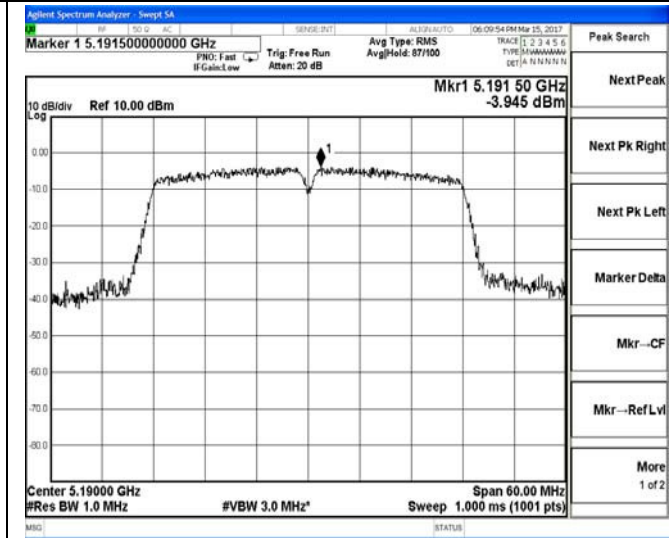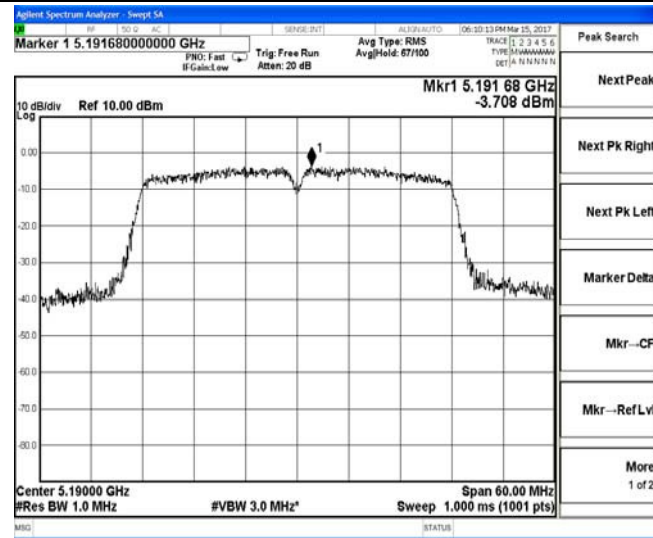

Channel 38 / 5190 MHz



Channel 38 / 5190 MHz

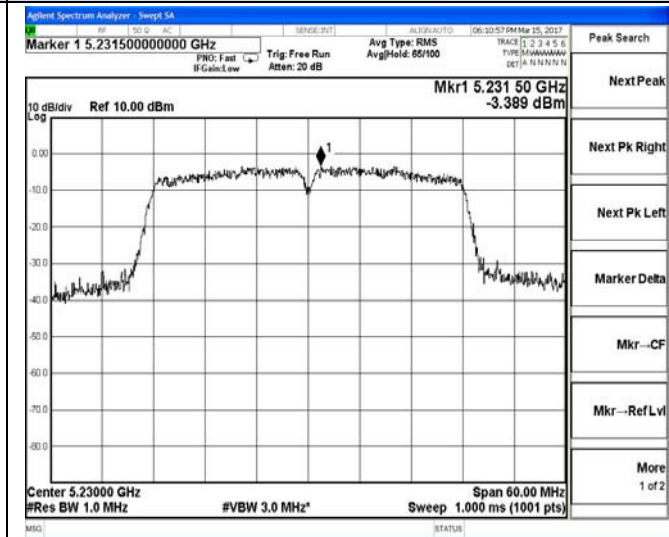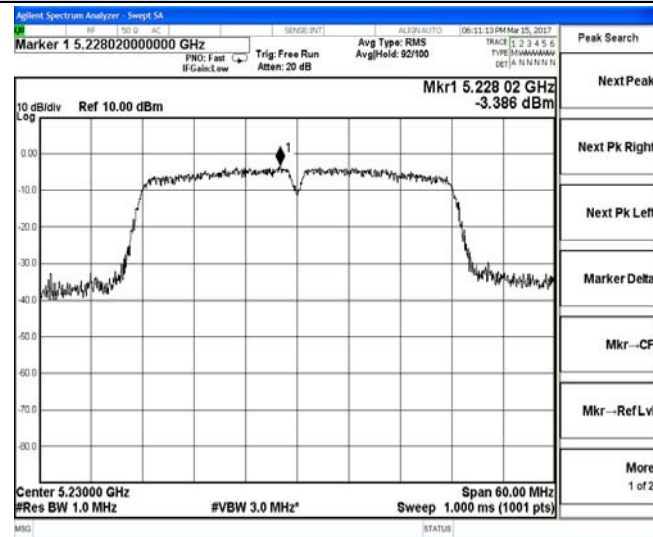

Channel 46 / 5230 MHz

Channel 46 / 5230 MHz

IEEE 802.11ac VHT40

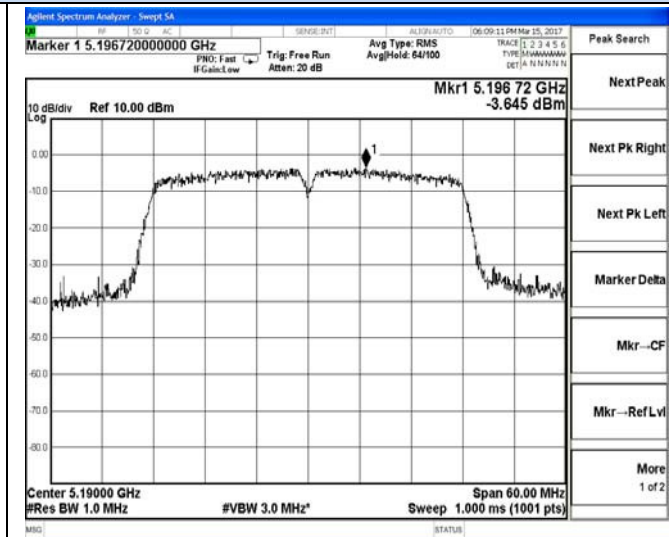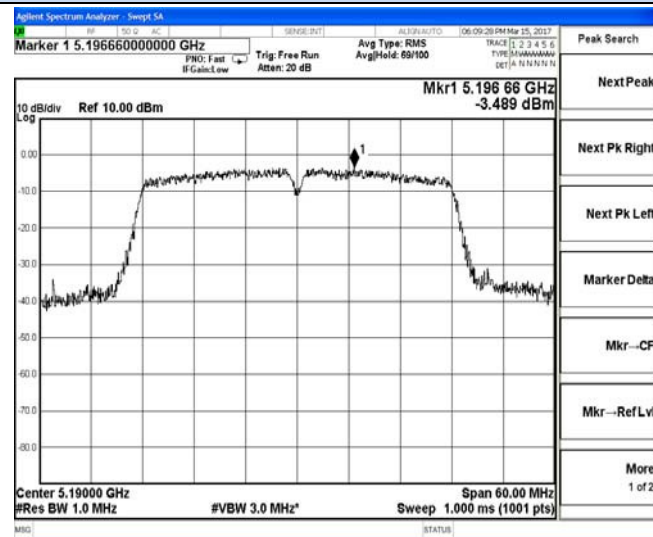

Channel 38 / 5190 MHz



Channel 38 / 5190 MHz

Power Spectrum Density

IEEE 802.11ac VHT40

Antenna Chain 0



Antenna Chain 1

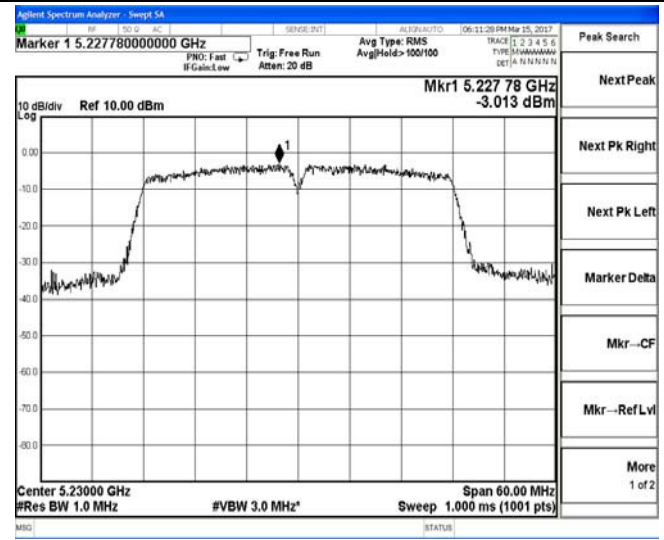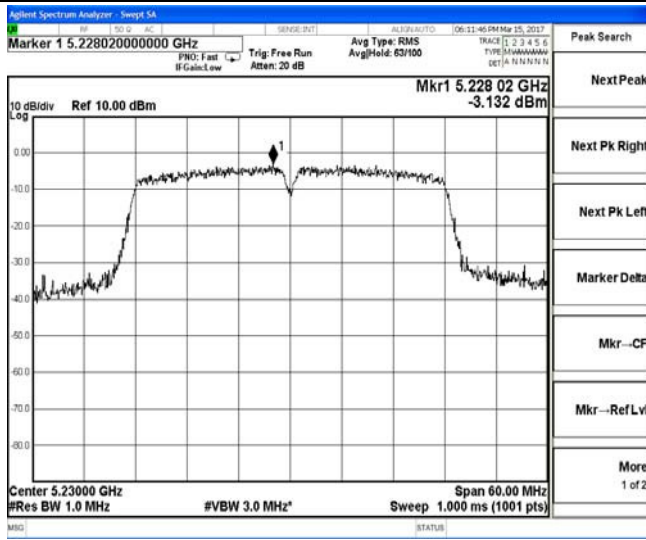

Channel 46 / 5230 MHz

Channel 46 / 5230 MHz

IEEE 802.11ac VHT80

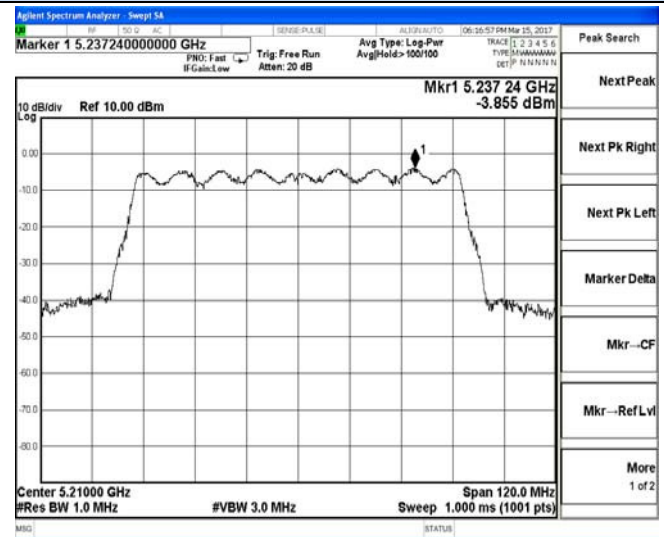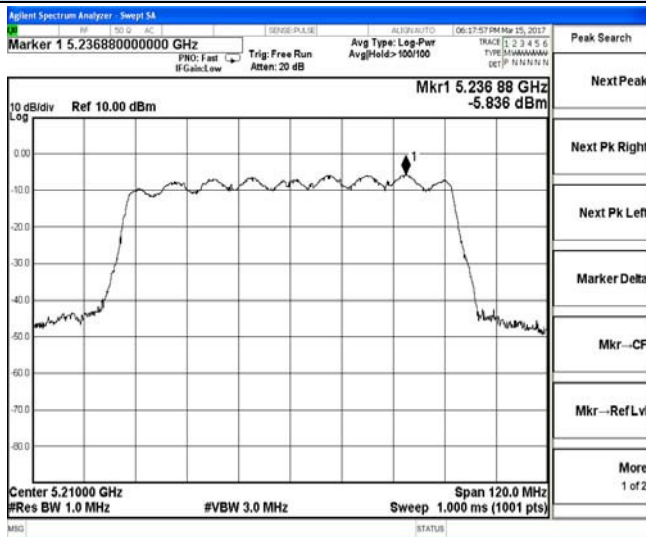

Channel 48 / 5210 MHz

Channel 48 / 5210 MHz

5.4. 99% and 26dB Occupied Bandwidth Measurement

5.4.1. Standard Applicable

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

5.4.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of the Spectrum Analyzer.


Spectrum Parameter	Setting
Attenuation	Auto
Span	> 26dB Bandwidth
Detector	Peak
Trace	Max Hold
Sweep Time	100ms

5

5.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 KHz and the video bandwidth of 1000 KHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.

5.4.4. Test Setup Layout

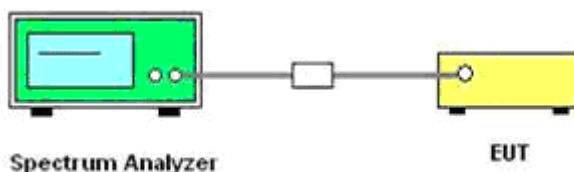

5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.4.6. Test Result of 99% and 26dB Occupied Bandwidth

Temperature	25°C	Humidity	60%
Test Engineer	Dick	Configurations	IEEE 802.11a/n/ac

Test Mode	Channel	Frequency (MHz)	26dB Bandwidth (MHz)		99% Bandwidth (MHz)		Limits (MHz)	Verdict
			Antenna 0	Antenna 1	Antenna 0	Antenna 1		
IEEE 802.11a	36	5180	21.980	22.530	16.774	16.795	No Limit	PASS
	40	5200	22.340	22.420	17.880	16.800		
	48	5240	22.360	21.590	17.862	16.804		
IEEE 802.11n HT20	36	5180	22.80	23.060	17.856	17.898	No Limit	PASS
	40	5200	22.390	23.030	17.843	17.897		
	48	5240	23.000	22.470	17.892	17.908		
IEEE 802.11ac VHT20	36	5180	22.510	22.470	17.870	17.886	No Limit	PASS
	40	5200	23.390	22.960	17.947	17.863		
	48	5240	22.890	23.020	17.895	17.901		
IEEE 802.11n HT40	38	5190	42.450	43.750	36.330	36.327	No Limit	PASS
	46	5230	43.550	42.890	36.374	36.379		
IEEE 802.11ac VHT40	38	5190	43.780	43.000	36.314	36.322	No Limit	PASS
	46	5230	42.810	43.560	36.323	36.346		
IEEE 802.11ac VHT80	42	5210	87.300	85.980	75.896	75.825	No Limit	PASS

Remark:



1. Measured 99% and 26dB bandwidth at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11a VHT20, IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;
4. Please refer to following test plots;

99% and 26dB Occupied Bandwidth

IEEE 802.11a


Antenna Chain 0

Antenna Chain 1

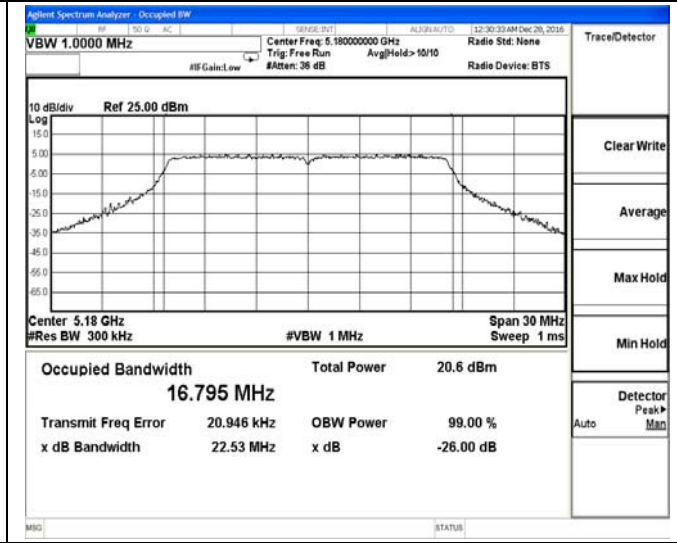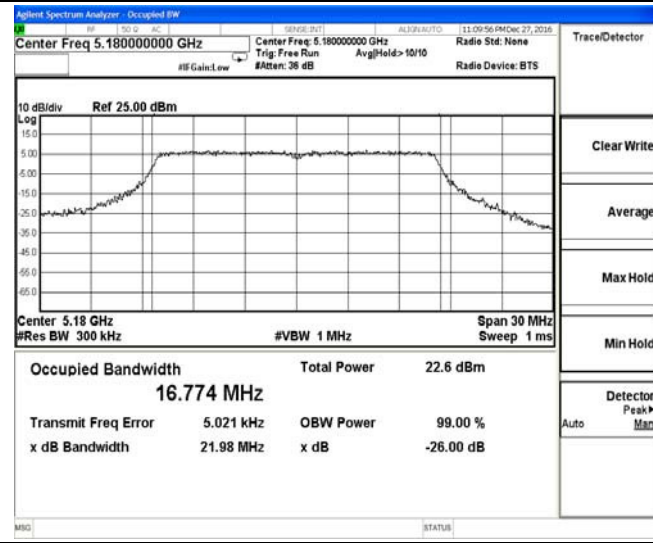


Channel 36 / 5180 MHz

Channel 36 / 5180 MHz

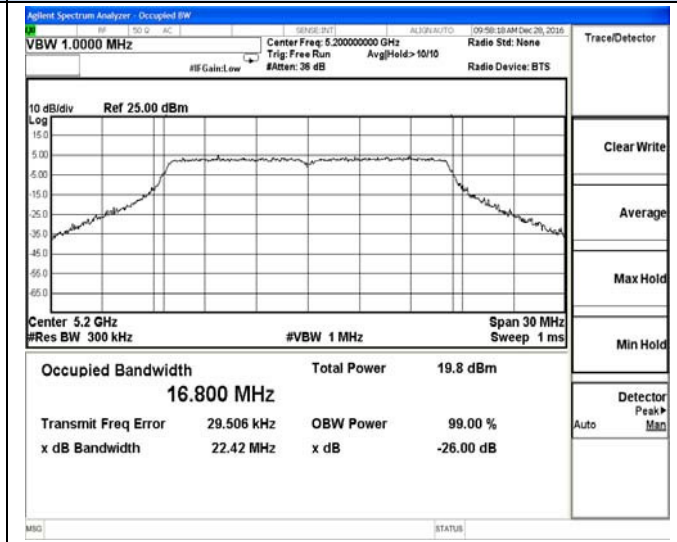

Channel 40 / 5200 MHz

Channel 40 / 5200 MHz

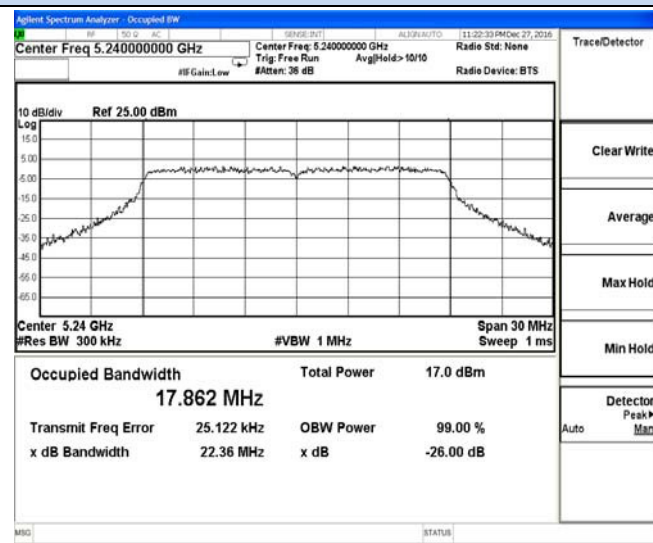

Channel 48 / 5240 MHz

Channel 48 / 5240 MHz

99% and 26dB Occupied Bandwidth
IEEE 802.11n HT20


Antenna Chain 0

Antenna Chain 1





Channel 36 / 5180 MHz

Channel 36 / 5180 MHz

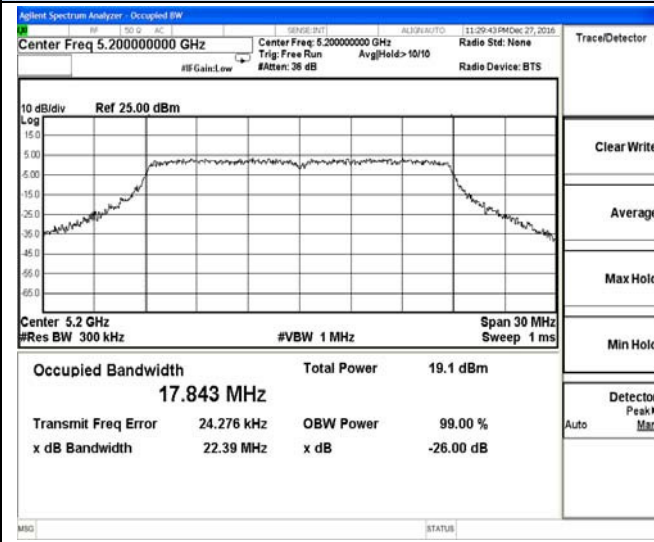

Channel 40 / 5200 MHz

Channel 40 / 5200 MHz

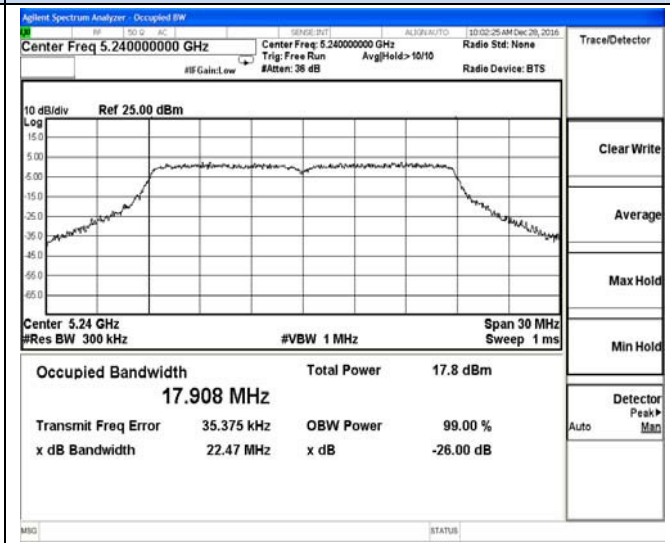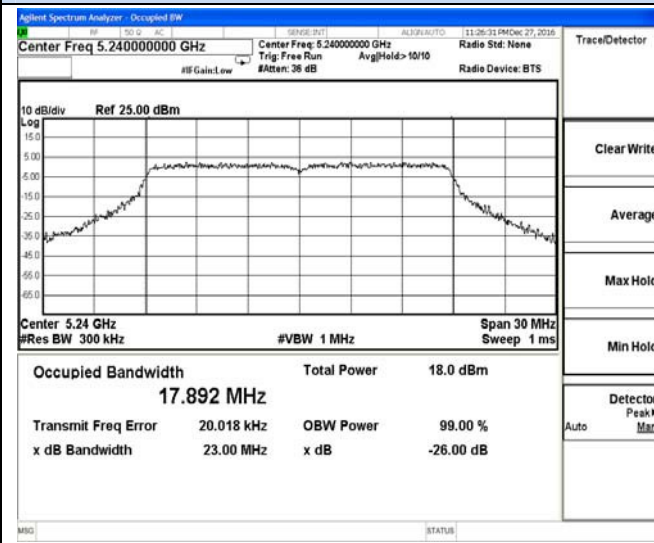



Channel 48 / 5240 MHz

Channel 48 / 5240 MHz

99% and 26dB Occupied Bandwidth
IEEE 802.11ac VHT20


Antenna Chain 0

Antenna Chain 1

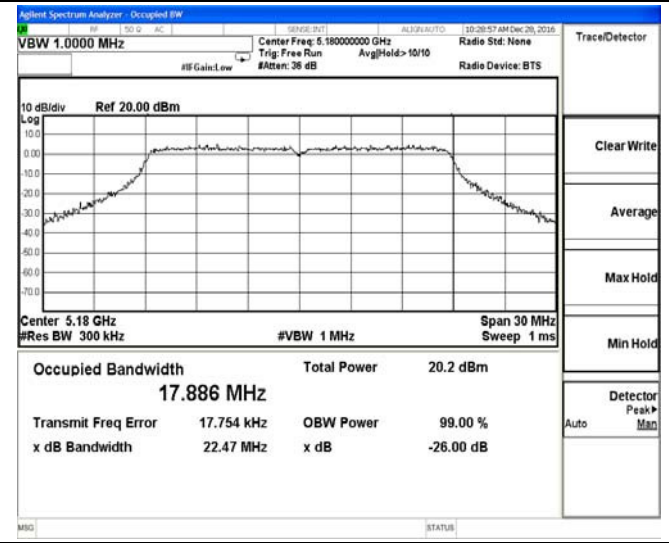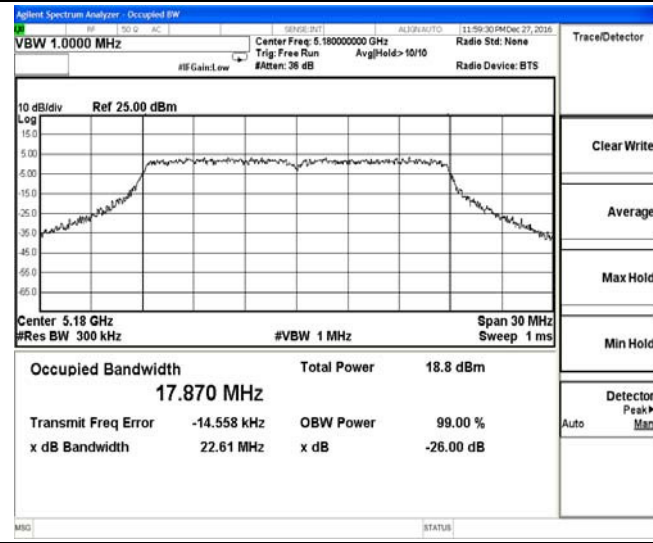


Channel 36 / 5180 MHz

Channel 36 / 5180 MHz

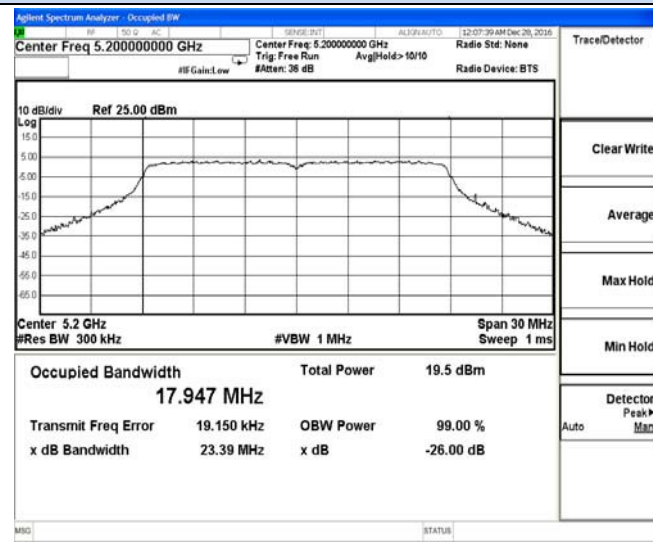

Channel 40 / 5200 MHz

Channel 40 / 5200 MHz

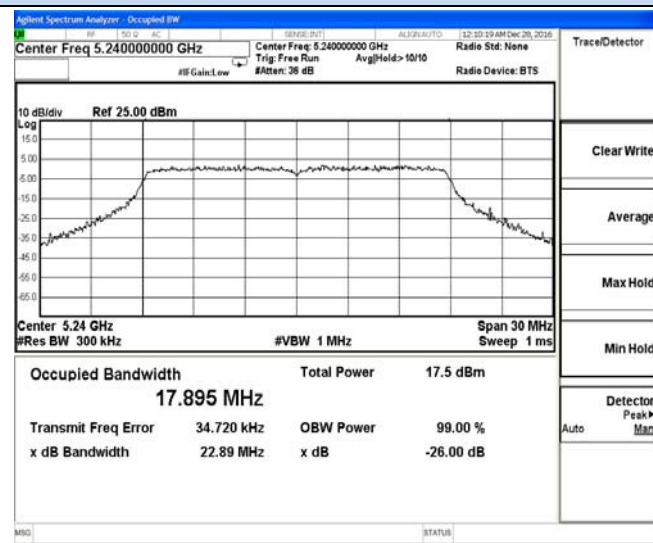


Channel 48 / 5240 MHz

Channel 48 / 5240 MHz

99% and 26dB Occupied Bandwidth
IEEE 802.11n HT40

Antenna Chain 0

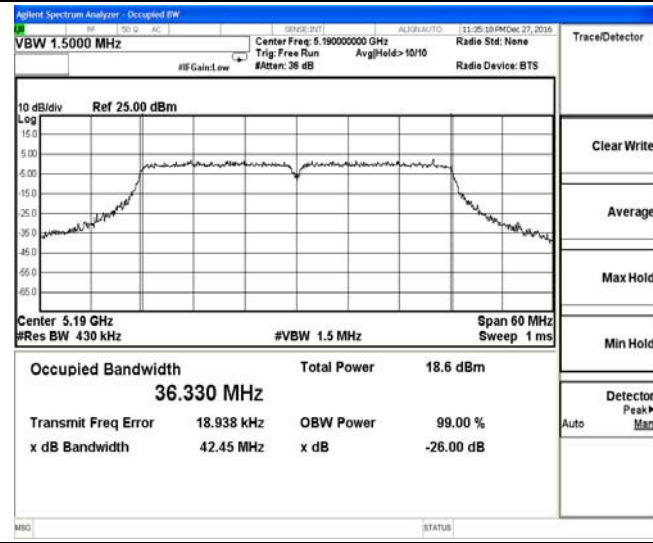

Antenna Chain 1




Channel 38 / 5190 MHz




Channel 38 / 5190 MHz



Channel 46 / 5230 MHz

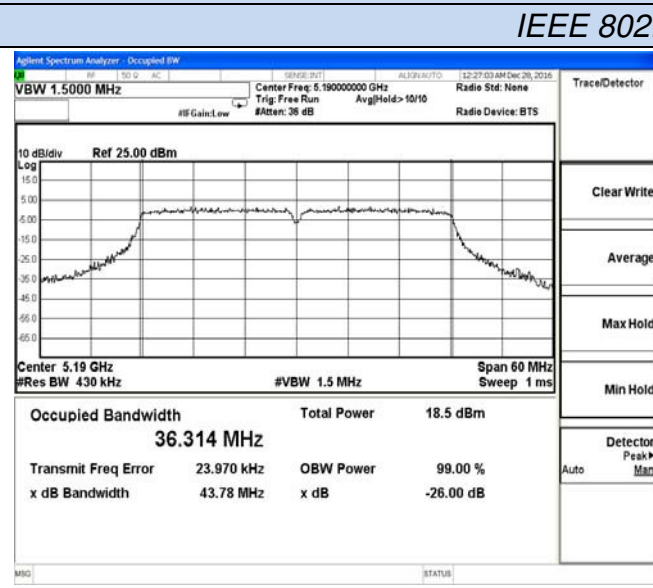

Channel 46 / 5230 MHz

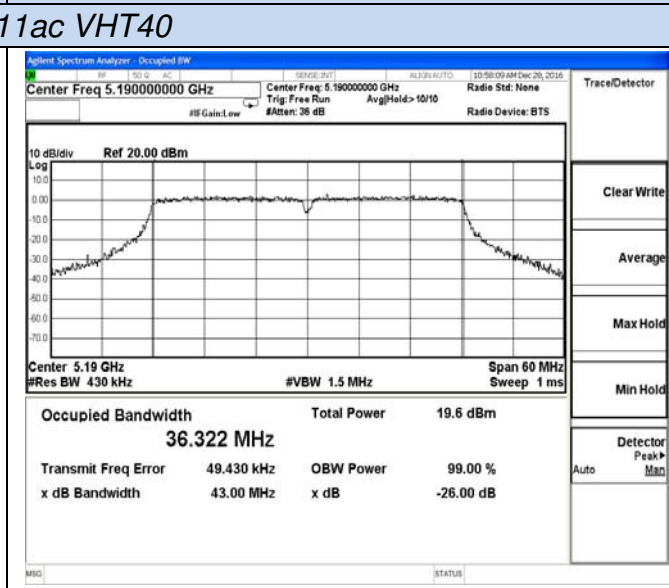

IEEE 802.11ac VHT40

Channel 38 / 5190 MHz




Channel 38 / 5190 MHz




99% and 26dB Occupied Bandwidth

IEEE 802.11ac VHT40

Antenna Chain 0

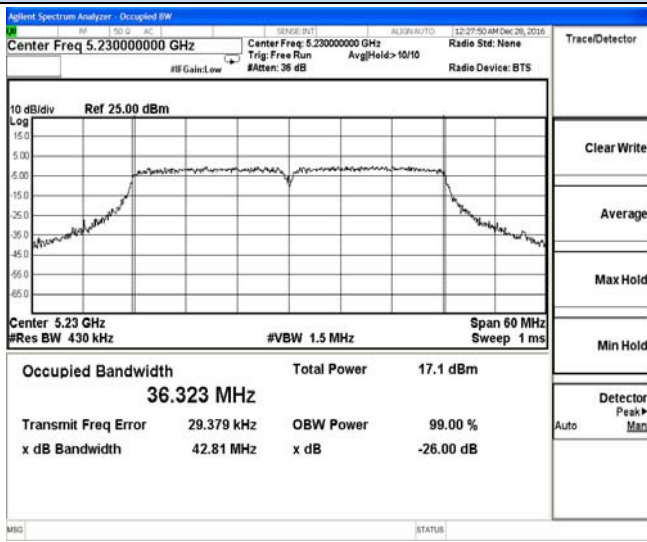


Antenna Chain 1

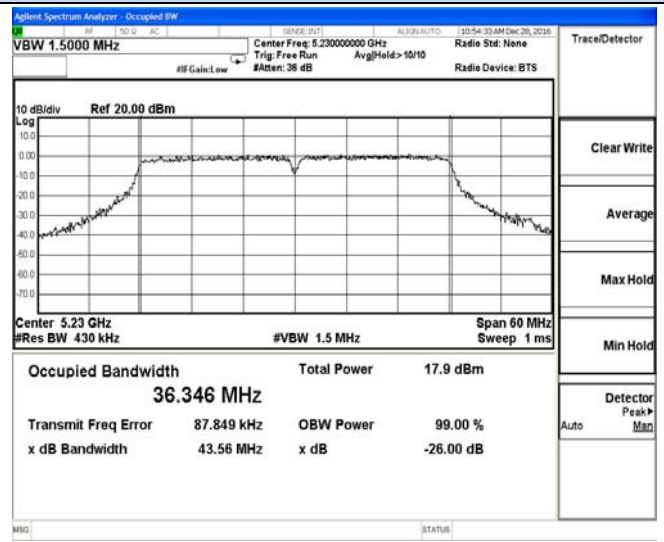

Channel 46 / 5230 MHz

Channel 46 / 5230 MHz

IEEE 802.11ac VHT80

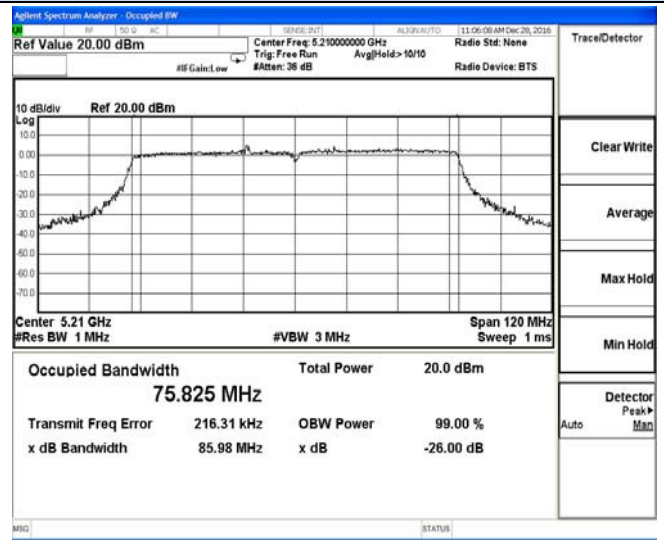

Channel 42 / 5210 MHz

Channel 42 / 5210 MHz

5.5. Radiated Emissions Measurement

5.5.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(\2\)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m at 3m).

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

5.5.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

5.5.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Premeasurement:


- The antenna is moved spherical over the EUT in different polarizations of the antenna.

Final measurement:


- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

5.5.4. Test Setup Layout


For radiated emissions below 30MHz

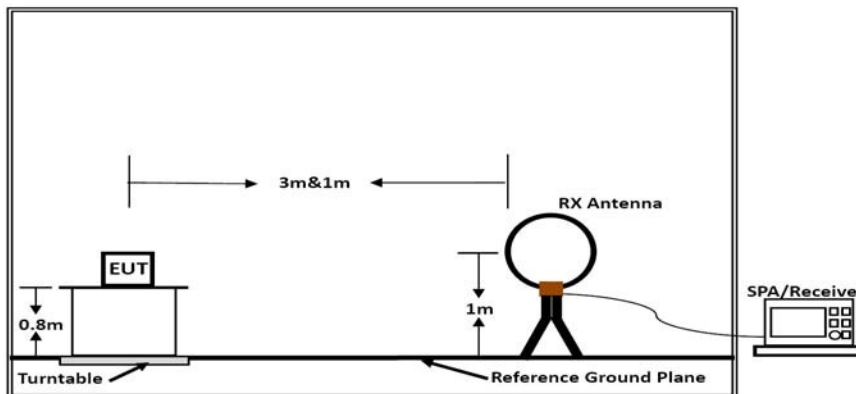

Below 30MHz

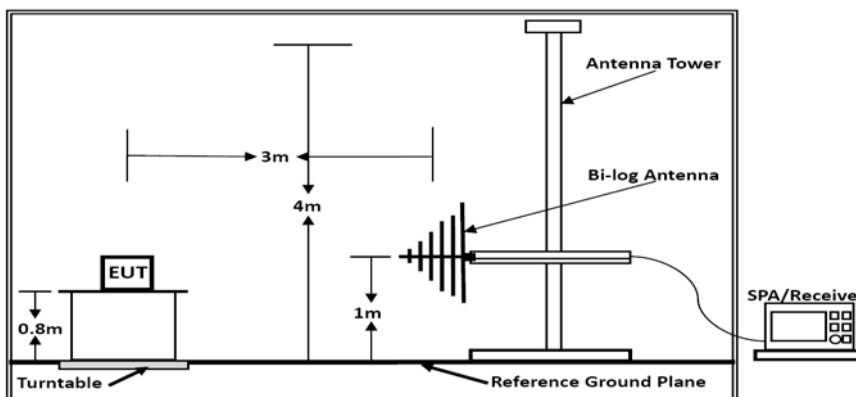

Below 1GHz

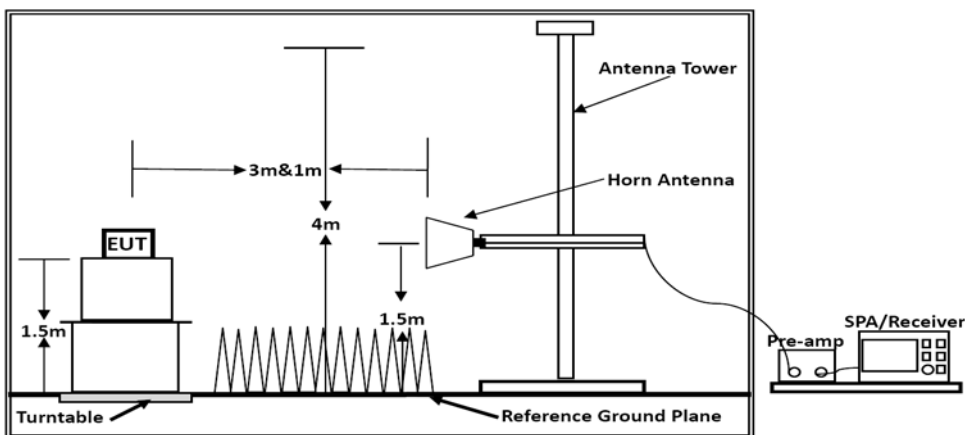

Above 1GHz

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.5.6. Results of Radiated Emissions (9 KHz~30MHz)

Temperature	25°C	Humidity	60%
Test Engineer	Dick	Configurations	IEEE 802.11a/n/ac

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

5.5.7. Results of Radiated Emissions (30MHz~1GHz)

Temperature	25°C	Humidity	60%
Test Engineer	Dick	Configurations	IEEE 802.11a, 5240MHz

Test result for IEEE 802.11a-5240MHz

Vertical:

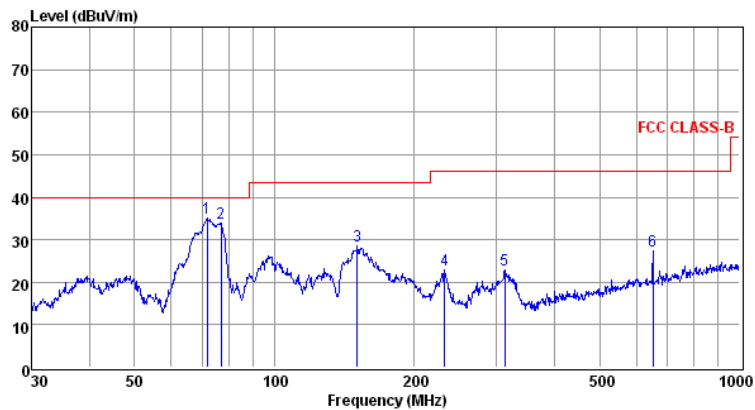


Env./Ins: 24°C/56%
 pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	71.58	26.03	0.55	8.38	34.96	40.00	-5.04	QP
2	76.78	25.50	0.47	8.06	34.03	40.00	-5.97	QP
3	150.54	19.40	0.73	8.28	28.41	43.50	-15.09	QP
4	232.53	10.10	0.98	11.76	22.84	46.00	-23.16	QP
5	313.28	8.70	1.09	13.24	23.03	46.00	-22.97	QP
6	651.94	7.27	1.58	18.64	27.49	46.00	-18.51	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

Horizontal:

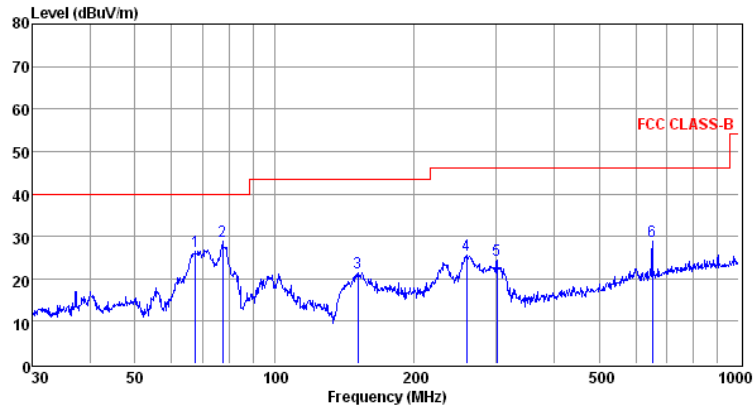

Env./Ins: 24°C/56%
 pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	67.44	16.13	0.51	9.71	26.35	40.00	-13.65	QP
2	77.32	20.10	0.47	8.14	28.71	40.00	-11.29	QP
3	151.07	12.53	0.73	8.30	21.56	43.50	-21.94	QP
4	259.23	12.59	1.01	12.05	25.65	46.00	-20.35	QP
5	301.42	10.18	1.13	13.08	24.39	46.00	-21.61	QP
6	651.94	8.52	1.58	18.64	28.74	46.00	-17.26	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

Note:

Pre-scan all modes and recorded the worst case results in this report (IEEE 802.11a-5240MHz).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

5.5.8. Results for Radiated Emissions (Above 1GHz)

Remark: Measured all modes and recorded worst case;

IEEE 802.11a/ Antenna Chain 0

Channel 36/5180 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.54	58.48	33.06	35.04	3.94	60.44	68.20	-7.76	Peak	Horizontal
15.54	41.72	33.06	35.04	3.94	43.68	54.00	-10.32	Average	Horizontal
15.54	56.95	33.06	35.04	3.94	58.91	68.20	-9.29	Peak	Vertical
15.54	39.86	33.06	35.04	3.94	41.82	54.00	-12.18	Average	Vertical

Channel 40 / 5200 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.60	57.84	33.16	35.15	3.96	59.81	68.20	-8.39	Peak	Horizontal
15.60	40.67	33.16	35.15	3.96	42.64	54.00	-11.36	Average	Horizontal
15.60	56.88	33.16	35.15	3.96	58.85	68.20	-9.35	Peak	Vertical
15.60	37.15	33.16	35.15	3.96	39.12	54.00	-14.88	Average	Vertical

Channel 48 / 5240 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.72	59.36	33.26	35.14	3.98	61.46	68.20	-6.74	Peak	Horizontal
15.72	41.14	33.26	35.14	3.98	43.24	54.00	-10.76	Average	Horizontal
15.72	56.59	33.26	35.14	3.98	58.69	68.20	-9.51	Peak	Vertical
15.72	38.17	33.26	35.14	3.98	40.27	54.00	-13.73	Average	Vertical

IEEE 802.11n-HT20/Combined Antenna Chain 0 and Antenna Chain 1

Channel 36 / 5180 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.54	60.63	33.06	35.04	3.94	62.59	68.20	-5.61	Peak	Horizontal
15.54	44.05	33.06	35.04	3.94	46.01	54.00	-7.99	Average	Horizontal
15.54	58.86	33.06	35.04	3.94	60.82	68.20	-7.38	Peak	Vertical
15.54	41.39	33.06	35.04	3.94	43.35	54.00	-10.65	Average	Vertical

Channel 40 / 5200 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.60	59.92	33.16	35.15	3.96	61.89	68.20	-6.31	Peak	Horizontal
15.60	44.19	33.16	35.15	3.96	46.16	54.00	-7.84	Average	Horizontal
15.60	59.47	33.16	35.15	3.96	61.44	68.20	-6.76	Peak	Vertical
15.60	42.34	33.16	35.15	3.96	44.31	54.00	-9.69	Average	Vertical

Channel 48 / 5240 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.72	60.12	33.26	35.14	3.98	62.22	68.20	-5.98	Peak	Horizontal
15.72	42.67	33.26	35.14	3.98	44.77	54.00	-9.23	Average	Horizontal
15.72	57.53	33.26	35.14	3.98	59.63	68.20	-8.57	Peak	Vertical
15.72	41.09	33.26	35.14	3.98	43.19	54.00	-10.81	Average	Vertical

IEEE 802.11ac VHT20/ Combined Antenna Chain 0 and Antenna Chain 1

Channel 36 / 5180 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.54	60.98	33.06	35.04	3.94	62.94	68.20	-5.26	Peak	Horizontal
15.54	42.79	33.06	35.04	3.94	44.75	54.00	-9.25	Average	Horizontal
15.54	59.06	33.06	35.04	3.94	61.02	68.20	-7.18	Peak	Vertical
15.54	40.52	33.06	35.04	3.94	42.48	54.00	-11.52	Average	Vertical

Channel 40 / 5200 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.60	60.91	33.16	35.15	3.96	62.88	68.20	-5.32	Peak	Horizontal
15.60	44.10	33.16	35.15	3.96	46.07	54.00	-7.93	Average	Horizontal
15.60	59.40	33.16	35.15	3.96	61.37	68.20	-6.83	Peak	Vertical
15.60	41.75	33.16	35.15	3.96	43.72	54.00	-10.28	Average	Vertical

Channel 48 / 5240 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.72	59.63	33.26	35.14	3.98	61.73	68.20	-6.47	Peak	Horizontal
15.72	43.52	33.26	35.14	3.98	45.62	54.00	-8.38	Average	Horizontal
15.72	58.60	33.26	35.14	3.98	60.70	68.20	-7.50	Peak	Vertical
15.72	41.96	33.26	35.14	3.98	44.06	54.00	-9.94	Average	Vertical

*IEEE 802.11n HT40 / Antenna Chain 0 and Antenna Chain 1**Channel 38 / 5190 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.57	58.90	33.06	35.04	3.94	60.86	68.20	-7.34	Peak	Horizontal
15.57	41.58	33.06	35.04	3.94	43.54	54.00	-10.46	Average	Horizontal
15.57	57.72	33.06	35.04	3.94	59.68	68.20	-8.52	Peak	Vertical
15.57	41.73	33.06	35.04	3.94	43.69	54.00	-10.31	Average	Vertical

Channel 46 / 5230 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.69	57.43	33.16	35.15	3.96	59.40	68.20	-8.80	Peak	Horizontal
15.69	41.59	33.16	35.15	3.96	43.56	54.00	-10.44	Average	Horizontal
15.69	59.04	33.16	35.15	3.96	61.01	68.20	-7.19	Peak	Vertical
15.69	39.96	33.16	35.15	3.96	41.93	54.00	-12.07	Average	Vertical

*IEEE 802.11ac VHT40 / Antenna Chain 0 and Antenna Chain 1**Channel 38 / 5190 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.57	58.31	33.06	35.04	3.94	60.27	68.20	-7.93	Peak	Horizontal
15.57	42.32	33.06	35.04	3.94	44.28	54.00	-9.72	Average	Horizontal
15.57	59.45	33.06	35.04	3.94	61.41	68.20	-6.79	Peak	Vertical
15.57	41.09	33.06	35.04	3.94	43.05	54.00	-10.95	Average	Vertical

Channel 46 / 5230 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.69	57.99	33.16	35.15	3.96	59.96	68.20	-8.24	Peak	Horizontal
15.69	40.93	33.16	35.15	3.96	42.90	54.00	-11.10	Average	Horizontal
15.69	58.69	33.16	35.15	3.96	60.66	68.20	-7.54	Peak	Vertical
15.69	40.91	33.16	35.15	3.96	42.88	54.00	-11.12	Average	Vertical

IEEE 802.11ac VHT80 / Antenna Chain 0 and Antenna Chain 1
Channel 42 / 5210 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.63	59.73	33.06	35.04	3.94	61.69	68.20	-6.51	Peak	Horizontal
15.63	42.79	33.06	35.04	3.94	44.75	54.00	-9.25	Average	Horizontal
15.63	59.48	33.06	35.04	3.94	61.44	68.20	-6.76	Peak	Vertical
15.63	42.17	33.06	35.04	3.94	44.13	54.00	-9.87	Average	Vertical

Notes:

1. Measuring frequencies from 9 KHz ~40 GHz, No emission found between lowest internal used/generated frequencies to 30MHz.
2. Radiated emissions measured in frequency range from 9 KHz ~40GHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11a VHT20, IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;

5.6. Power line conducted emissions


5.6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

5.6.2 Block Diagram of Test Setup

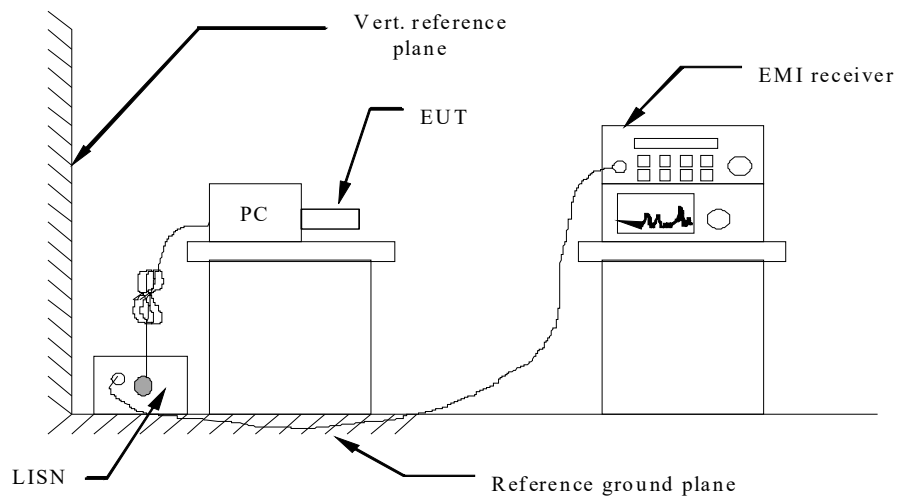


5.6.3 Test Results

PASS.

The test data please refer to following page.


AC Conducted Emission of power by adapter @ AC 120V/60Hz @ IEEE 802.11a (worst case)

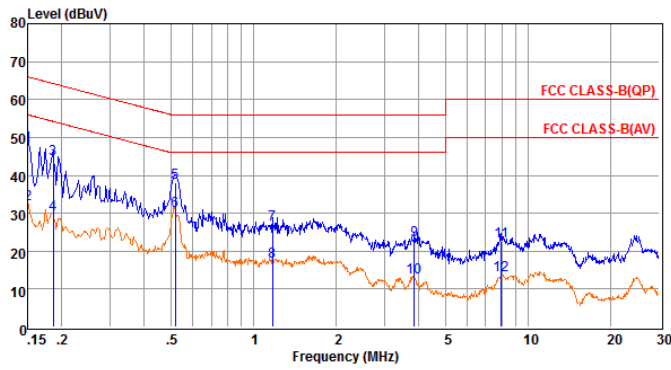

Env. Ins: 24*/56%
 Pol: NEUTRAL

Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	0.15	28.03	9.70	0.02	10.00	47.75	66.00	-18.25 QP
2	0.15	12.82	9.70	0.02	10.00	32.54	55.99	-23.45 Average
3	0.19	24.73	9.62	0.02	10.00	44.37	64.20	-19.83 QP
4	0.19	10.08	9.62	0.02	10.00	29.72	54.19	-24.47 Average
5	0.52	18.52	9.62	0.04	10.00	38.18	56.00	-17.82 QP
6	0.52	10.87	9.62	0.04	10.00	30.53	46.00	-15.47 Average
7	1.17	7.28	9.63	0.05	10.00	26.96	56.00	-29.04 QP
8	1.17	-2.49	9.63	0.05	10.00	17.19	46.00	-28.81 Average
9	3.84	3.21	9.65	0.06	10.00	22.92	56.00	-33.08 QP
10	3.84	-6.54	9.65	0.06	10.00	13.17	46.00	-32.83 Average
11	7.98	2.95	9.70	0.07	10.00	22.72	60.00	-37.28 QP
12	7.98	-5.97	9.70	0.07	10.00	13.80	50.00	-36.20 Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

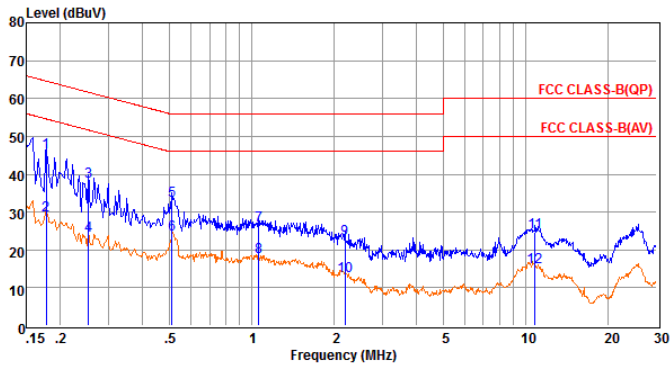


Env. Ins: 24*/56%
 Pol: NEUTRAL

Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	0.18	26.24	9.64	0.02	10.00	45.90	64.59	-18.69 QP
2	0.18	9.64	9.63	0.02	10.00	29.29	54.59	-25.30 Average
3	0.25	18.35	9.60	0.03	10.00	37.98	61.64	-23.66 QP
4	0.25	4.23	9.60	0.03	10.00	23.86	51.64	-27.78 Average
5	0.51	13.43	9.62	0.04	10.00	33.09	56.00	-22.91 QP
6	0.51	4.50	9.62	0.04	10.00	24.16	46.00	-21.84 Average
7	1.06	6.64	9.63	0.05	10.00	26.32	56.00	-29.68 QP
8	1.06	-1.66	9.63	0.05	10.00	18.02	46.00	-27.98 Average
9	2.19	3.32	9.63	0.05	10.00	23.00	56.00	-33.00 QP
10	2.19	-6.46	9.63	0.05	10.00	13.22	46.00	-32.78 Average
11	10.79	4.75	9.72	0.08	10.00	24.55	60.00	-35.45 QP
12	10.79	-4.40	9.72	0.08	10.00	15.40	50.00	-34.60 Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.


AC Conducted Emission of power by adapter @ AC 240V/50Hz @ IEEE 802.11a (worst case)

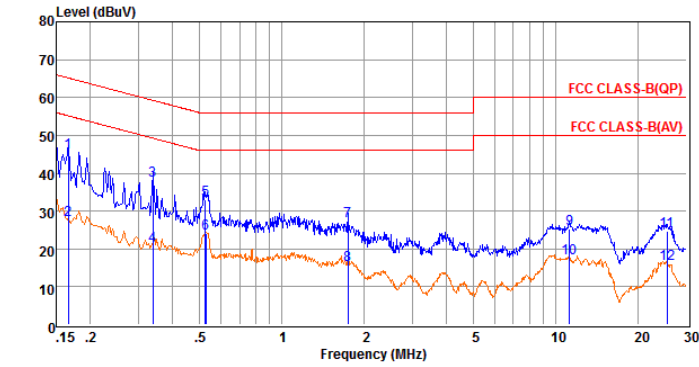

Env. Ins: 24*/56%
 Pol: LINE

Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark	
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV		
1	0.17	25.76	9.59	0.02	10.00	45.37	65.16	-19.79	QP
2	0.17	7.91	9.59	0.02	10.00	27.52	55.16	-27.64	Average
3	0.34	18.36	9.62	0.03	10.00	38.01	59.27	-21.26	QP
4	0.34	1.24	9.62	0.03	10.00	20.89	49.26	-28.37	Average
5	0.53	13.50	9.62	0.04	10.00	33.16	56.00	-22.84	QP
6	0.53	4.48	9.62	0.04	10.00	24.14	46.00	-21.86	Average
7	1.74	7.73	9.64	0.05	10.00	27.42	56.00	-28.58	QP
8	1.74	-3.82	9.64	0.05	10.00	15.87	46.00	-30.13	Average
9	11.20	5.49	9.70	0.09	10.00	25.28	60.00	-34.72	QP
10	11.20	-2.29	9.70	0.09	10.00	17.50	50.00	-32.50	Average
11	25.46	4.72	9.71	0.13	10.00	24.56	60.00	-35.44	QP
12	25.46	-3.79	9.71	0.13	10.00	16.05	50.00	-33.95	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

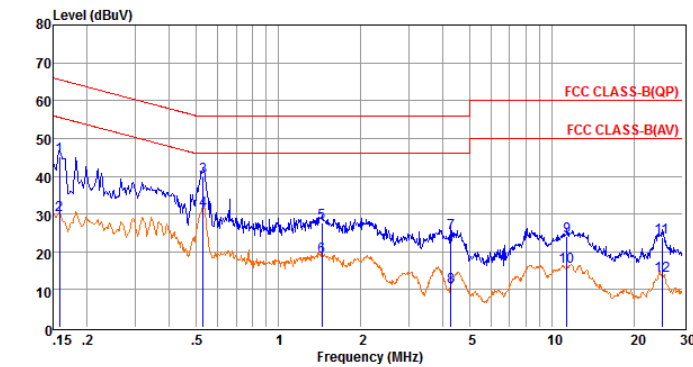

Env. Ins: 24*/56%
 Pol: NEUTRAL

Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark	
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV		
1	0.16	25.61	9.68	0.02	10.00	45.31	65.56	-20.25	QP
2	0.16	10.11	9.68	0.02	10.00	29.81	55.55	-25.74	Average
3	0.53	20.14	9.62	0.04	10.00	39.80	56.00	-16.20	QP
4	0.53	11.30	9.62	0.04	10.00	30.96	46.00	-15.04	Average
5	1.44	7.99	9.63	0.05	10.00	27.67	56.00	-28.33	QP
6	1.44	-0.97	9.63	0.05	10.00	18.71	46.00	-27.29	Average
7	4.27	5.31	9.65	0.06	10.00	25.02	56.00	-30.98	QP
8	4.27	-9.01	9.65	0.06	10.00	10.70	46.00	-35.30	Average
9	11.32	4.35	9.73	0.09	10.00	24.17	60.00	-35.83	QP
10	11.32	-3.88	9.73	0.09	10.00	15.94	50.00	-34.06	Average
11	25.19	3.89	9.83	0.13	10.00	23.85	60.00	-36.15	QP
12	25.19	-6.21	9.83	0.13	10.00	13.75	50.00	-36.25	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

***Note: Pre-scan all modes and recorded the worst case results in this report (IEEE 802.11a).


5.7 Undesirable Emissions Measurement

5.7.1 LIMIT

According to §15.407 (b) Undesirable emission limits. Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (a) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (b) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (c) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (d) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
- (e) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (f) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (g) The provisions of §15.205 apply to intentional radiators operating under this section.
- (h) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

5.7.2 TEST CONFIGURATION

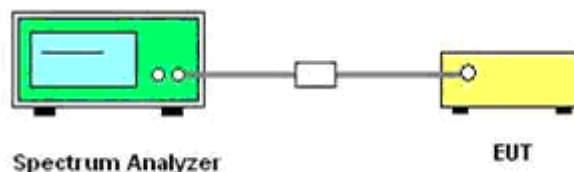

5.7.3 TEST PROCEDURE

According to KDB789033 D02 General UNII Test Procedures New Rules v01 Section G: Unwanted Emission Measurement

1. Unwanted Emissions in the Restricted Bands

- a) For all measurements, follow the requirements in section II.G.3. "General Requirements for Unwanted Emissions Measurements."
- b) At frequencies below 1000 MHz, use the procedure described in section II.G.4. "Procedure for Unwanted Emissions Measurements below 1000 MHz."
- c) At frequencies above 1000 MHz, measurements performed using the peak and average measurement procedures described in sections II.G.5. and II.G.6, respectively, must satisfy the respective peak and average limits. If all peak measurements satisfy the average limit, then average measurements are not required.
- d) For conducted measurements above 1000 MHz, EIRP shall be computed as specified in section II.G.3.b) and then field strength shall be computed as follows (see KDB Publication 412172):
 - i) $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$, where E = field strength and d = distance at which field strength limit is specified in the rules;

ii) $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d = 3$ meters

e) For conducted measurements below 1000 MHz, the field strength shall be computed as specified in d), above, and then an additional 4.7 dB shall be added as an upper bound on the field strength that would be observed on a test range with a ground plane for frequencies between 30 MHz and 1000 MHz, or an additional 6 dB shall be added for frequencies below 30 MHz.

2. Unwanted Emissions that fall Outside of the Restricted Bands

a) For all measurements, follow the requirements in section II.G.3. "General Requirements for Unwanted Emissions Measurements."

b) At frequencies below 1000 MHz, use the procedure described in section II.G.4. "Procedure for Unwanted Emissions Measurements below 1000 MHz."

c) At frequencies above 1000 MHz, use the procedure for maximum emissions described in section II.G.5., "Procedure for Unwanted Maximum Unwanted Emissions Measurements Above 1000 MHz."

d) Section 15.407(b) (1-3) specifies the unwanted emissions limit for the U-NII-1 and 2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz. However, an out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz dBm/MHz peak emission limit.

i) Section 15.407(b) (4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b) (4) (i). An alternative to the band emissions mask is specified in Section 15.407(b) (4) (ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the alternative limit.

e) If radiated measurements are performed, field strength is then converted to EIRP as follows:

i) $\text{EIRP} = ((E \times d)^2) / 30$

Where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotopically radiated power in watts;

ii) Working in dB units, the above equation is equivalent to:

$$\text{EIRP} [\text{dBm}] = E [\text{dB}\mu\text{V}/\text{m}] + 20 \log (d [\text{meters}]) - 104.77$$

iii) Or, if d is 3 meters:

$$\text{EIRP} [\text{dBm}] = E [\text{dB}\mu\text{V}/\text{m}] - 95.23$$

3) Radiated versus Conducted Measurements.

The unwanted emission limits in both the restricted and non-restricted bands are based on radiated measurements; however, as an alternative, antenna-port conducted measurements in conjunction with cabinet emissions tests will be permitted to demonstrate compliance provided that the following steps are performed:

- (i) Cabinet emissions measurements. A radiated test shall be performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna may be replaced by a termination matching the nominal impedance of the antenna.
- (ii) Impedance matching. Conducted tests shall be performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT.
- (iii) EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater.³ However, for devices that operate in multiple bands using the same transmit antenna, the highest gain of the antenna within the operating band nearest to the out-of-band frequency being measured may be used in lieu of the overall highest gain when measuring emissions at frequencies within 20% of the absolute frequency at the nearest edge of that band, but in no case shall a value less than 2 dBi be selected.
- (iv) EIRP adjustments for multiple outputs. For devices with multiple outputs occupying the same or overlapping frequency ranges in the same band (e.g., MIMO or beamforming devices), compute the total EIRP as follows:
 - Compute EIRP for each output, as described in (iii), above.
 - Follow the procedures specified in KDB Publication 662911 for summing emissions across the outputs or adjusting emission levels measured on individual outputs by $10 \log (N_{\text{ANT}})$, where N_{ANT} is the number of outputs.
 - Add the array gain term specified in KDB Publication 662911 for out-of-band and spurious signals.
- (v) Direction of maximum emission. For all radiated emissions tests, measurements shall correspond to the direction of maximum emission level for each measured emission (see ANSI C63.10 for guidance).

5.7.4 TEST RESULTS

For Antenna Chain 0

IEEE 802.11a								
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Over limit dB	Verdict
4500.000	-45.064	2.150	0.000	52.344	Peak	74.00	-21.656	PASS
4500.000	-56.897	2.150	0.000	40.511	Average	54.00	-13.489	PASS
5150.000	-42.630	2.150	0.000	54.778	Peak	74.00	-19.222	PASS
5150.000	-53.461	2.150	0.000	43.947	Average	54.00	-10.053	PASS
5350.000	-45.308	2.150	0.000	52.100	Peak	74.00	-21.900	PASS
5350.000	-55.100	2.150	0.000	42.308	Average	54.00	-11.692	PASS
5460.000	-45.438	2.150	0.000	51.970	Peak	74.00	-22.030	PASS
5460.000	-55.404	2.150	0.000	42.004	Average	54.00	-11.996	PASS

IEEE 802.11n HT20								
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Over limit dB	Verdict
4500.000	-48.189	2.150	0.000	49.219	Peak	74.00	-24.781	PASS
4500.000	-56.865	2.150	0.000	40.543	Average	54.00	-13.457	PASS
5150.000	-43.342	2.150	0.000	54.066	Peak	74.00	-19.934	PASS
5150.000	-53.200	2.150	0.000	44.208	Average	54.00	-9.792	PASS
5350.000	-46.188	2.150	0.000	51.220	Peak	74.00	-22.780	PASS
5350.000	-54.639	2.150	0.000	42.769	Average	54.00	-11.231	PASS
5460.000	-44.486	2.150	0.000	52.922	Peak	74.00	-21.078	PASS
5460.000	-54.403	2.150	0.000	43.005	Average	54.00	-10.995	PASS

IEEE 802.11ac VHT20								
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Over limit dB	Verdict
4500.000	-45.981	2.150	0.000	51.427	Peak	74.00	-22.573	PASS
4500.000	-56.718	2.150	0.000	40.690	Average	54.00	-13.310	PASS
5150.000	-41.997	2.150	0.000	55.411	Peak	74.00	-18.589	PASS
5150.000	-53.047	2.150	0.000	44.361	Average	54.00	-9.639	PASS
5350.000	-42.497	2.150	0.000	54.911	Peak	74.00	-19.089	PASS
5350.000	-54.537	2.150	0.000	42.871	Average	54.00	-11.129	PASS
5460.000	-44.157	2.150	0.000	53.251	Peak	74.00	-20.749	PASS
5460.000	-54.137	2.150	0.000	43.271	Average	54.00	-10.729	PASS

IEEE 802.11n HT40								
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Over limit dB	Verdict
4500.000	-47.323	2.150	0.000	50.085	Peak	74.00	-23.915	PASS
4500.000	-56.733	2.150	0.000	40.675	Average	54.00	-13.325	PASS
5150.000	-38.096	2.150	0.000	59.312	Peak	74.00	-14.688	PASS
5150.000	-49.076	2.150	0.000	48.332	Average	54.00	-5.668	PASS
5350.000	-44.531	2.150	0.000	52.877	Peak	74.00	-21.123	PASS
5350.000	-53.214	2.150	0.000	44.194	Average	54.00	-9.806	PASS
5460.000	-42.699	2.150	0.000	54.709	Peak	74.00	-19.291	PASS
5460.000	-52.828	2.150	0.000	44.580	Average	54.00	-9.420	PASS

IEEE 802.11ac VHT40

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Over limit dB	Verdict
4500.000	-47.282	2.150	0.000	50.126	Peak	74.00	-23.874	PASS
4500.000	-56.473	2.150	0.000	40.935	Average	54.00	-13.065	PASS
5150.000	-39.293	2.150	0.000	58.115	Peak	74.00	-15.885	PASS
5150.000	-49.922	2.150	0.000	47.486	Average	54.00	-6.514	PASS
5350.000	-41.830	2.150	0.000	55.578	Peak	74.00	-18.422	PASS
5350.000	-53.316	2.150	0.000	44.092	Average	54.00	-9.908	PASS
5460.000	-41.961	2.150	0.000	55.447	Peak	74.00	-18.553	PASS
5460.000	-52.917	2.150	0.000	44.491	Average	54.00	-9.509	PASS

IEEE 802.11ac VHT80

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Over limit dB	Verdict
4500.000	-46.631	2.150	0.000	50.777	Peak	74.00	-23.223	PASS
4500.000	-56.130	2.150	0.000	41.278	Average	54.00	-12.722	PASS
5150.000	-40.022	2.150	0.000	57.386	Peak	74.00	-16.614	PASS
5150.000	-49.573	2.150	0.000	47.835	Average	54.00	-6.165	PASS
5350.000	-42.982	2.150	0.000	54.426	Peak	74.00	-19.574	PASS
5350.000	-53.130	2.150	0.000	44.278	Average	54.00	-9.722	PASS
5460.000	-42.809	2.150	0.000	54.599	Peak	74.00	-19.401	PASS
5460.000	-53.155	2.150	0.000	44.253	Average	54.00	-9.747	PASS

*For Antenna Chain 1***IEEE 802.11a**

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Over limit dB	Verdict
4500.000	-45.091	2.150	0.000	52.317	Peak	74.00	-21.683	PASS
4500.000	-56.945	2.150	0.000	40.463	Average	54.00	-13.537	PASS
5150.000	-44.505	2.150	0.000	52.903	Peak	74.00	-21.097	PASS
5150.000	-53.291	2.150	0.000	44.117	Average	54.00	-9.883	PASS
5350.000	-44.997	2.150	0.000	52.411	Peak	74.00	-21.589	PASS
5350.000	-55.248	2.150	0.000	42.160	Average	54.00	-11.840	PASS
5460.000	-45.071	2.150	0.000	52.337	Peak	74.00	-21.663	PASS
5460.000	-55.511	2.150	0.000	41.897	Average	54.00	-12.103	PASS

IEEE 802.11n HT20

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Over limit dB	Verdict
4500.000	-45.801	2.150	0.000	51.607	Peak	74.00	-22.393	PASS
4500.000	-56.861	2.150	0.000	40.547	Average	54.00	-13.453	PASS
5150.000	-43.434	2.150	0.000	53.974	Peak	74.00	-20.026	PASS
5150.000	-53.148	2.150	0.000	44.260	Average	54.00	-9.740	PASS
5350.000	-43.637	2.150	0.000	53.771	Peak	74.00	-20.229	PASS
5350.000	-54.554	2.150	0.000	42.854	Average	54.00	-11.146	PASS
5460.000	-43.465	2.150	0.000	53.943	Peak	74.00	-20.057	PASS
5460.000	-54.247	2.150	0.000	43.161	Average	54.00	-10.839	PASS

IEEE 802.11ac VHT20

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Over limit dB	Verdict
4500.000	-47.345	2.150	0.000	50.063	Peak	74.00	-23.937	PASS
4500.000	-56.892	2.150	0.000	40.516	Average	54.00	-13.484	PASS
5150.000	-42.386	2.150	0.000	55.022	Peak	74.00	-18.978	PASS
5150.000	-52.861	2.150	0.000	44.547	Average	54.00	-9.453	PASS
5350.000	-45.010	2.150	0.000	52.398	Peak	74.00	-21.602	PASS
5350.000	-54.586	2.150	0.000	42.822	Average	54.00	-11.178	PASS
5460.000	-45.044	2.150	0.000	52.364	Peak	74.00	-21.636	PASS
5460.000	-54.193	2.150	0.000	43.215	Average	54.00	-10.785	PASS

IEEE 802.11n HT40

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Over limit dB	Verdict
4500.000	-47.271	2.150	0.000	50.137	Peak	74.00	-23.863	PASS
4500.000	-56.494	2.150	0.000	40.914	Average	54.00	-13.086	PASS
5150.000	-39.380	2.150	0.000	58.028	Peak	74.00	-15.972	PASS
5150.000	-49.998	2.150	0.000	47.410	Average	54.00	-6.590	PASS
5350.000	-43.358	2.150	0.000	54.050	Peak	74.00	-19.950	PASS
5350.000	-53.579	2.150	0.000	43.829	Average	54.00	-10.171	PASS
5460.000	-42.976	2.150	0.000	54.432	Peak	74.00	-19.568	PASS
5460.000	-52.913	2.150	0.000	44.495	Average	54.00	-9.505	PASS

IEEE 802.11ac VHT40

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Over limit dB	Verdict
4500.000	-46.460	2.150	0.000	50.948	Peak	74.00	-23.052	PASS
4500.000	-56.770	2.150	0.000	40.638	Average	54.00	-13.362	PASS
5150.000	-36.377	2.150	0.000	61.031	Peak	74.00	-12.969	PASS
5150.000	-49.300	2.150	0.000	48.108	Average	54.00	-5.892	PASS
5350.000	-42.046	2.150	0.000	55.362	Peak	74.00	-18.638	PASS
5350.000	-53.226	2.150	0.000	44.182	Average	54.00	-9.818	PASS
5460.000	-43.408	2.150	0.000	54.000	Peak	74.00	-20.000	PASS
5460.000	-52.537	2.150	0.000	44.871	Average	54.00	-9.129	PASS

IEEE 802.11ac VHT80

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Over limit dB	Verdict
4500.000	-45.412	2.150	0.000	51.996	Peak	74.00	-22.004	PASS
4500.000	-56.219	2.150	0.000	41.189	Average	54.00	-12.811	PASS
5150.000	-39.341	2.150	0.000	58.067	Peak	74.00	-15.933	PASS
5150.000	-49.741	2.150	0.000	47.667	Average	54.00	-6.333	PASS
5350.000	-44.378	2.150	0.000	53.030	Peak	74.00	-20.970	PASS
5350.000	-53.145	2.150	0.000	44.263	Average	54.00	-9.737	PASS
5460.000	-43.838	2.150	0.000	53.570	Peak	74.00	-20.430	PASS
5460.000	-53.191	2.150	0.000	44.217	Average	54.00	-9.783	PASS

For Combined Antenna Chain 0 and Antenna Chain 1

IEEE 802.11n HT20										
Frequency (MHz)	Conducted Power (dBm)			Directional Gain (dB)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Over limit dB	Verdict
	Antenna 0	Antenna 1	Sum							
4500.000	-48.189	-45.801	-43.823	5.160*	0.000	56.595	Peak	74.00	-17.405	PASS
4500.000	-56.865	-56.861	-53.853	5.160*	0.000	46.565	Average	54.00	-7.435	PASS
5150.000	-43.342	-43.434	-40.377	5.160*	0.000	60.041	Peak	74.00	-13.959	PASS
5150.000	-53.200	-53.148	-50.164	5.160*	0.000	50.254	Average	54.00	-3.746	PASS
5350.000	-46.188	-43.637	-41.718	5.160*	0.000	58.700	Peak	74.00	-15.300	PASS
5350.000	-54.639	-54.554	-51.586	5.160*	0.000	48.832	Average	54.00	-5.168	PASS
5460.000	-44.486	-43.465	-40.935	5.160*	0.000	59.483	Peak	74.00	-14.517	PASS
5460.000	-54.403	-54.247	-51.314	5.160*	0.000	49.104	Average	54.00	-4.896	PASS

IEEE 802.11ac VHT20										
Frequency (MHz)	Conducted Power (dBm)			Directional Gain (dB)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Over limit dB	Verdict
	Antenna 0	Antenna 1	Sum							
4500.000	-45.981	-47.345	-43.599	5.160*	0.000	56.819	Peak	74.00	-17.181	PASS
4500.000	-56.718	-56.892	-53.794	5.160*	0.000	46.624	Average	54.00	-7.376	PASS
5150.000	-41.997	-42.386	-39.177	5.160*	0.000	61.241	Peak	74.00	-12.759	PASS
5150.000	-53.047	-52.861	-49.943	5.160*	0.000	50.475	Average	54.00	-3.525	PASS
5350.000	-42.497	-45.010	-40.564	5.160*	0.000	59.854	Peak	74.00	-14.146	PASS
5350.000	-54.537	-54.586	-51.551	5.160*	0.000	48.867	Average	54.00	-5.133	PASS
5460.000	-44.157	-45.044	-41.568	5.160*	0.000	58.850	Peak	74.00	-15.150	PASS
5460.000	-54.137	-54.193	-51.155	5.160*	0.000	49.263	Average	54.00	-4.737	PASS

IEEE 802.11n HT40										
Frequency (MHz)	Conducted Power (dBm)			Directional Gain (dB)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Over limit dB	Verdict
	Antenna 0	Antenna 1	Sum							
4500.000	-47.323	-47.271	-44.287	5.160*	0.000	56.131	Peak	74.00	-17.869	PASS
4500.000	-56.733	-56.494	-53.602	5.160*	0.000	46.816	Average	54.00	-7.184	PASS
5150.000	-38.096	-39.380	-35.680	5.160*	0.000	64.738	Peak	74.00	-9.262	PASS
5150.000	-49.076	-49.998	-46.502	5.160*	0.000	53.916	Average	54.00	-0.084	PASS
5350.000	-44.531	-43.358	-40.895	5.160*	0.000	59.523	Peak	74.00	-14.477	PASS
5350.000	-53.214	-53.579	-50.382	5.160*	0.000	50.036	Average	54.00	-3.964	PASS
5460.000	-42.699	-42.976	-39.825	5.160*	0.000	60.593	Peak	74.00	-13.407	PASS
5460.000	-52.828	-52.913	-49.860	5.160*	0.000	50.558	Average	54.00	-3.442	PASS

IEEE 802.11ac VHT40										
Frequency (MHz)	Conducted Power (dBm)			Directional Gain (dB)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Over limit dB	Verdict
	Antenna 0	Antenna 1	Sum							
4500.000	-47.282	-46.460	-43.841	5.160*	0.000	56.577	Peak	74.00	-17.423	PASS
4500.000	-56.473	-56.770	-53.609	5.160*	0.000	46.809	Average	54.00	-7.191	PASS
5150.000	-39.293	-36.377	-34.584	5.160*	0.000	65.834	Peak	74.00	-8.166	PASS
5150.000	-49.922	-49.300	-46.590	5.160*	0.000	53.828	Average	54.00	-0.172	PASS
5350.000	-41.830	-42.046	-38.926	5.160*	0.000	61.492	Peak	74.00	-12.508	PASS
5350.000	-53.316	-53.226	-50.260	5.160*	0.000	50.158	Average	54.00	-3.842	PASS
5460.000	-41.961	-43.408	-39.614	5.160*	0.000	60.804	Peak	74.00	-13.196	PASS
5460.000	-52.917	-52.537	-49.713	5.160*	0.000	50.705	Average	54.00	-3.295	PASS

IEEE 802.11ac VHT80

Frequency (MHz)	Conducted Power (dBm)			Directional Gain (dB)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Over limit dB	Verdict
	Antenna 0	Antenna 1	Sum							
4500.000	-46.631	-45.412	-42.969	5.160*	0.000	57.449	Peak	74.00	-16.551	PASS
4500.000	-56.130	-56.219	-53.164	5.160*	0.000	47.254	Average	54.00	-6.746	PASS
5150.000	-40.022	-39.341	-36.658	5.160*	0.000	63.760	Peak	74.00	-10.240	PASS
5150.000	-49.573	-49.741	-46.646	5.160*	0.000	53.772	Average	54.00	-0.228	PASS
5350.000	-42.982	-44.378	-40.614	5.160*	0.000	59.804	Peak	74.00	-14.196	PASS
5350.000	-53.130	-53.145	-50.127	5.160*	0.000	50.291	Average	54.00	-3.709	PASS
5460.000	-42.809	-43.838	-40.283	5.160*	0.000	60.135	Peak	74.00	-13.865	PASS
5460.000	-53.155	-53.191	-50.163	5.160*	0.000	50.255	Average	54.00	-3.745	PASS

Remark:



1. Measured Undesirable emission at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11a VHT20, IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;
4. For MIMO with CCD technology device, The Directional Gain= Gain of individual transmit antennas (dBi) + Array gain;
Array gain = $10 \log(N_{ant})$, where N_{ant} is the number of transmit antennas.
5. $*5.160=2.150+10*\log(2)$.
6. Covert Radiated E Level At 3m = Conducted average power + Directional Gain + $104.77-20*\log(3)$;
7. Please refer to following test plots;

Undesirable emission

IEEE 802.11a



Antenna Chain 0

Antenna Chain 1

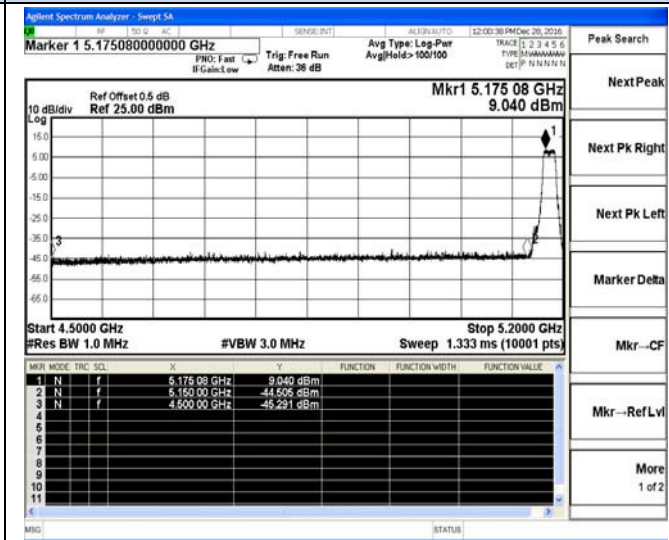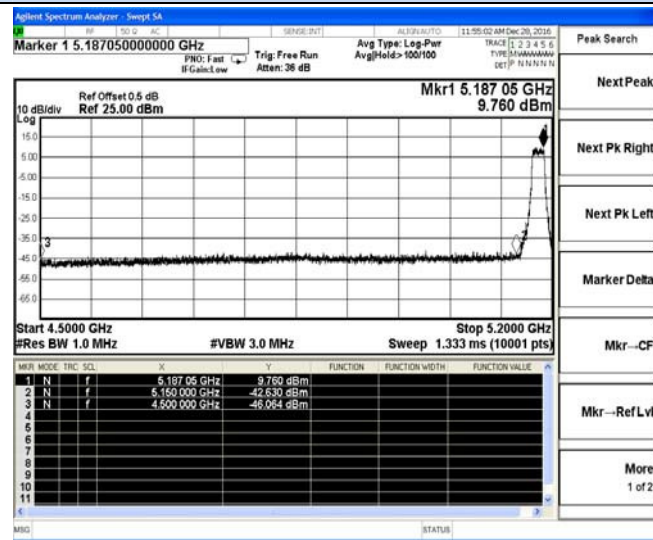



Channel 36 / 5180 MHz – Peak

Channel 36 / 5180 MHz – Peak

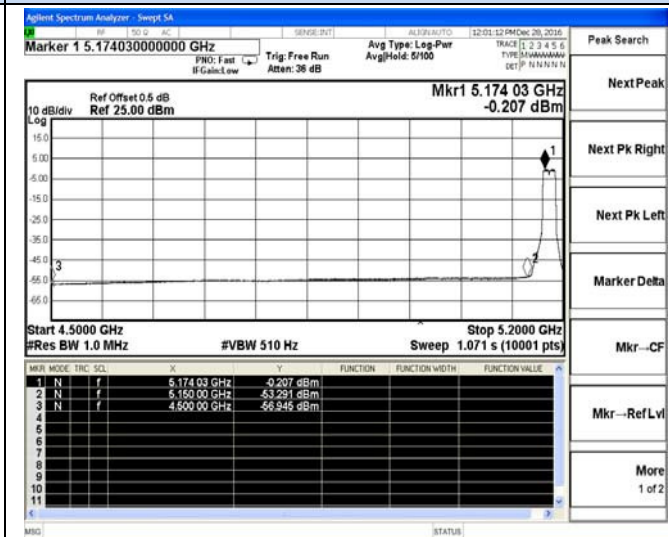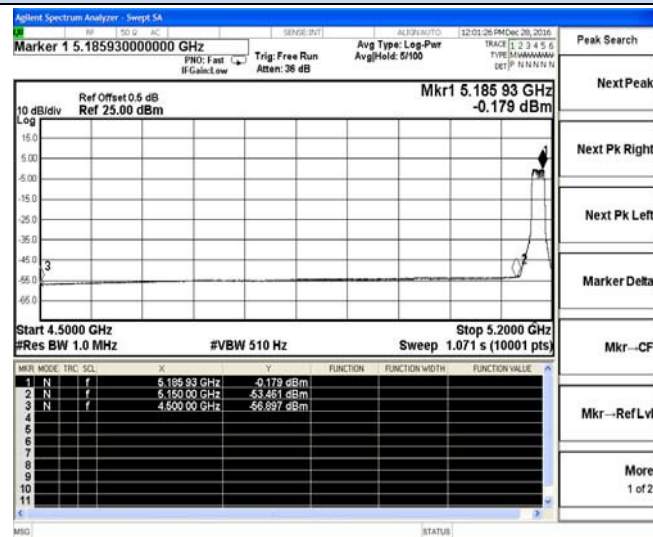

Channel 36 / 5180 MHz – Average

Channel 36 / 5180 MHz – Average

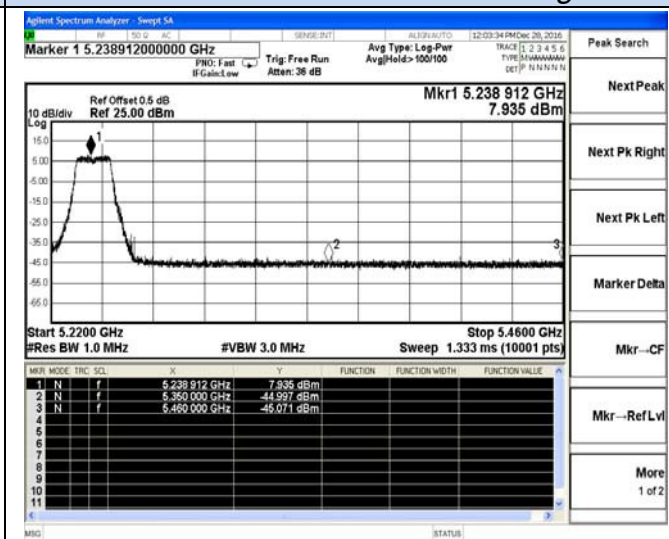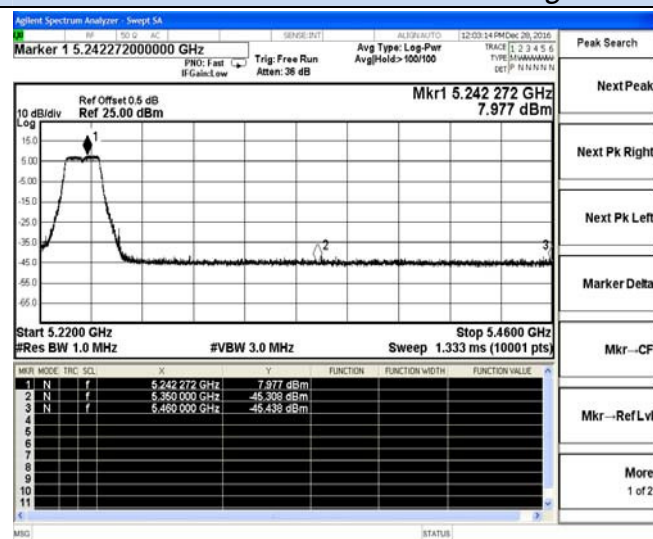

Channel 48 / 5240 MHz – Peak



Channel 48 / 5240 MHz – Peak

Undesirable emission

IEEE 802.11a

Antenna Chain 0



Antenna Chain 1

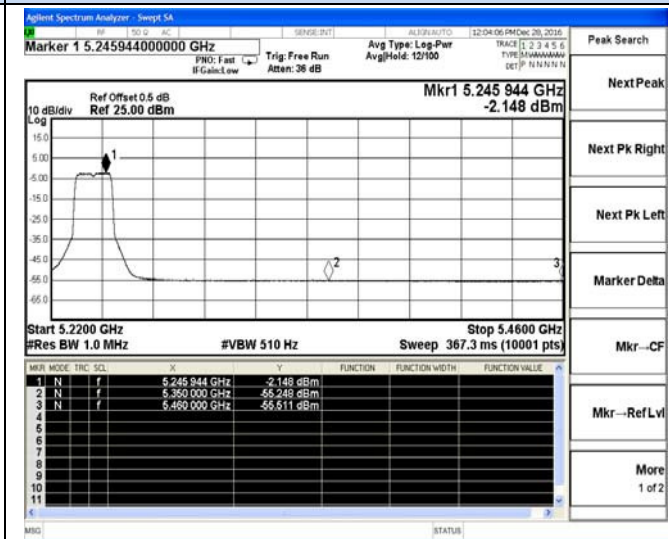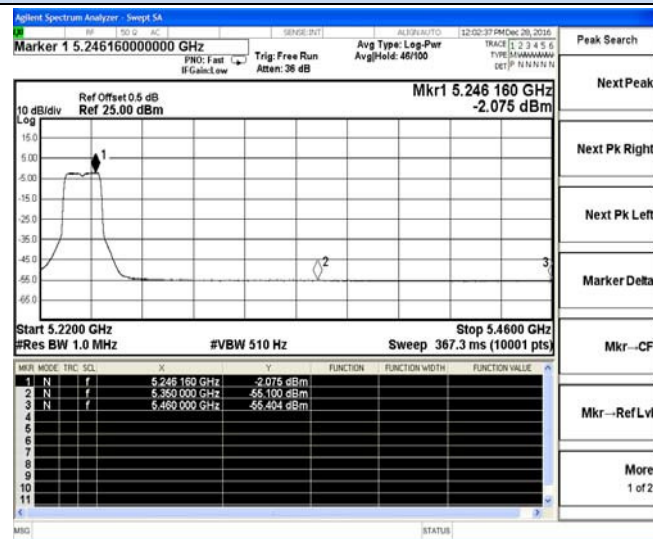

Channel 48 / 5240 MHz – Average



Channel 48 / 5240 MHz – Average

IEEE 802.11n HT20

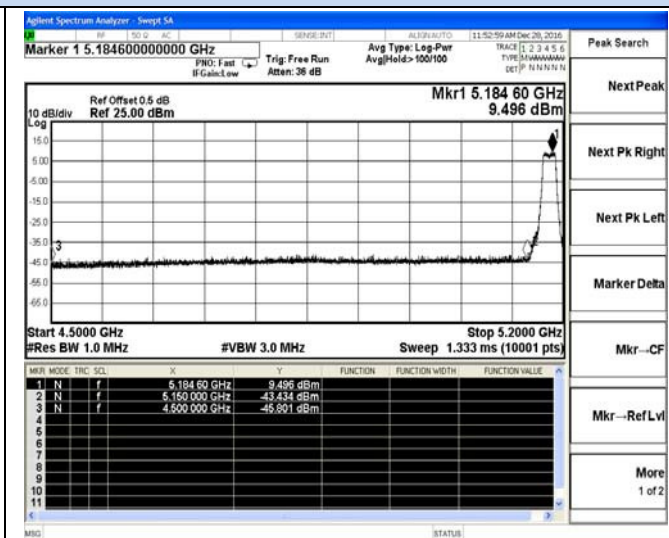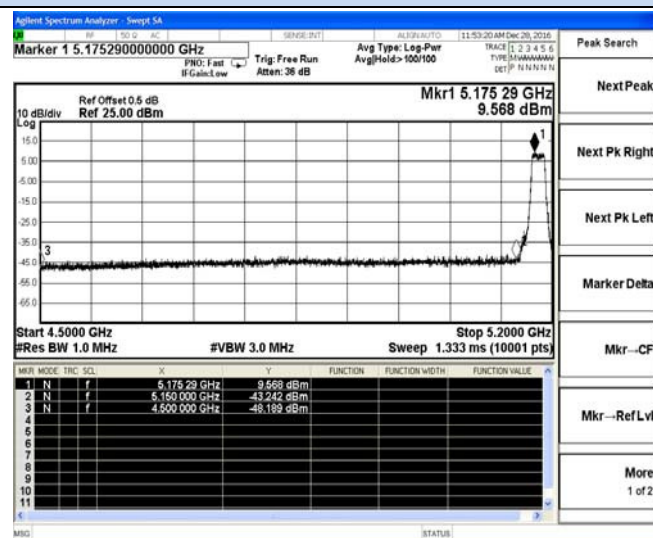

Channel 36 / 5180 MHz – Peak

Channel 36 / 5180 MHz – Peak

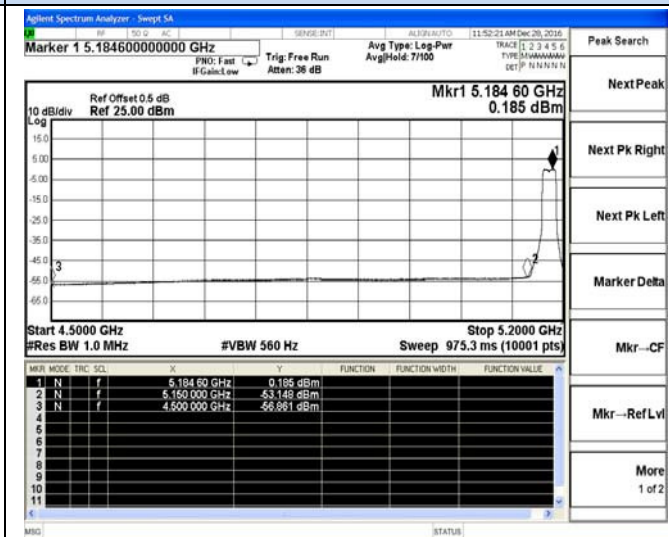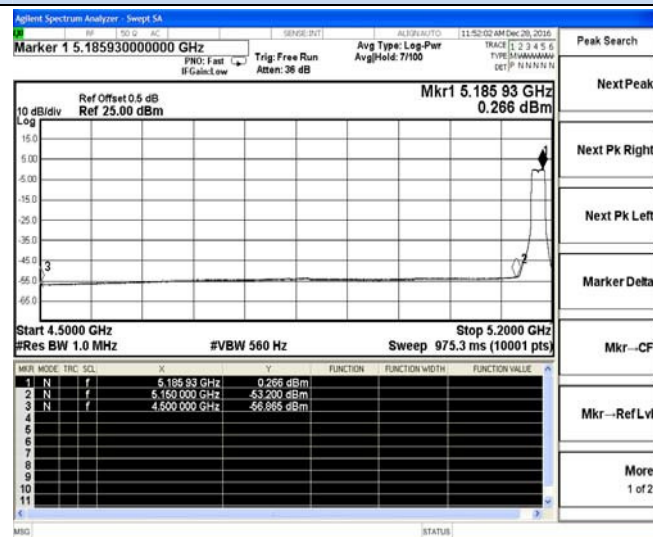



Channel 36 / 5180 MHz – Average

Channel 36 / 5180 MHz – Average

Undesirable emission
IEEE 802.11n HT20



Antenna Chain 0

Antenna Chain 1

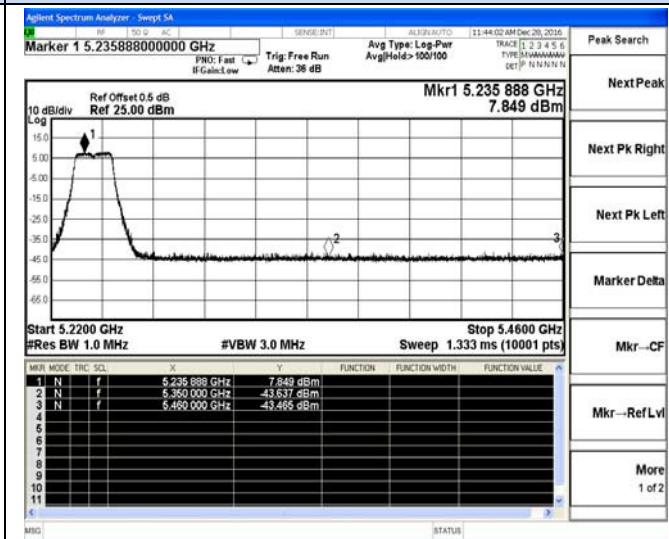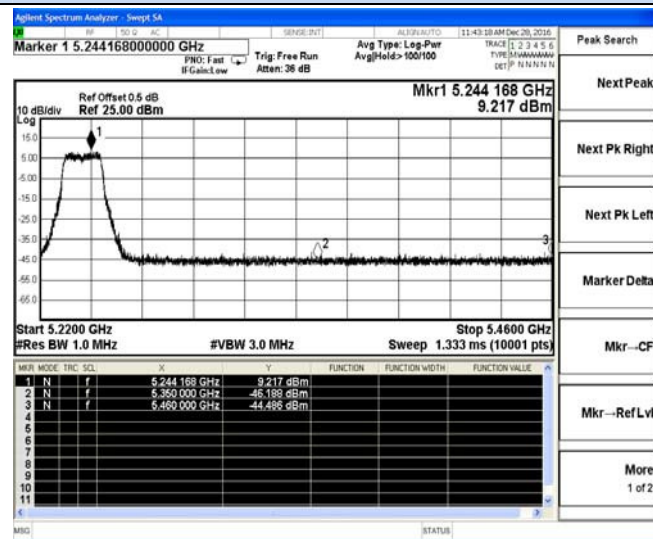

Channel 48 / 5240 MHz – Peak



Channel 48 / 5240 MHz – Peak

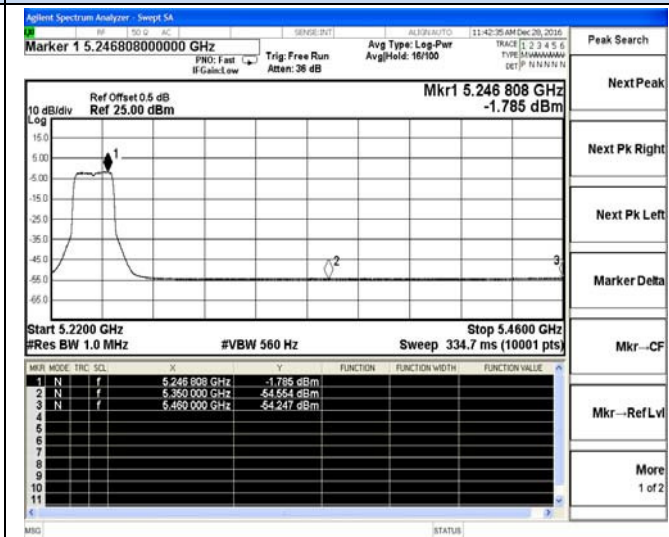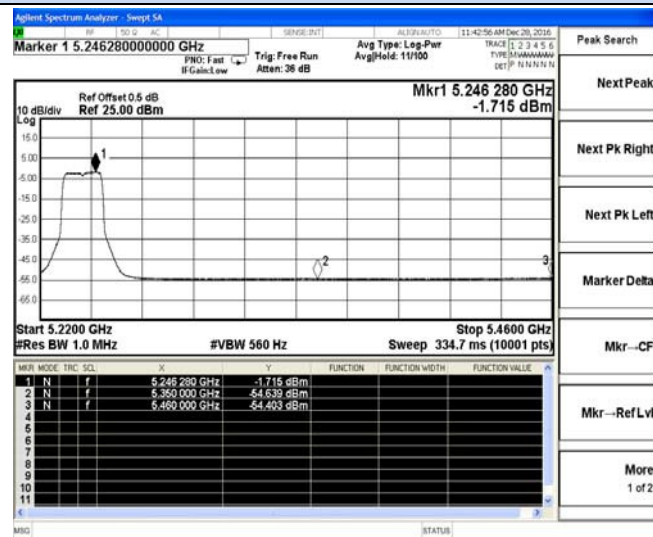

Channel 48 / 5240 MHz – Average

Channel 48 / 5240 MHz – Average

IEEE 802.11ac VHT20

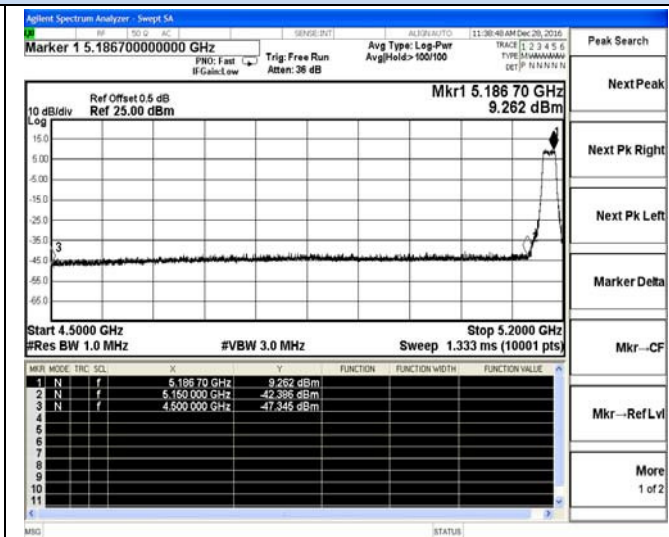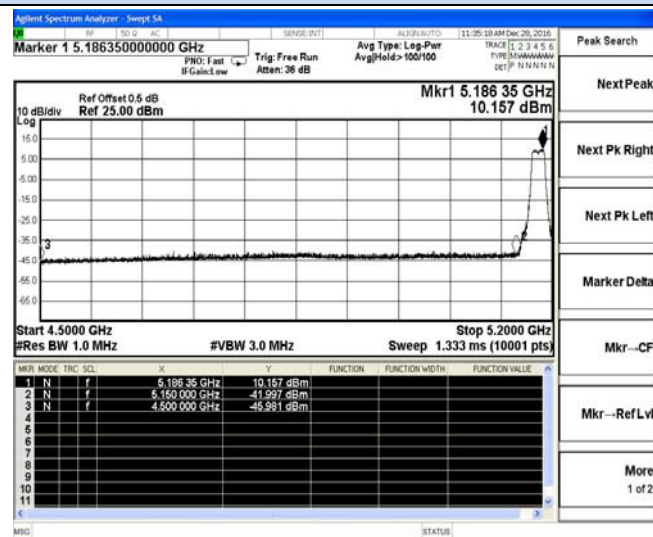



Channel 36 / 5180 MHz – Peak

Channel 36 / 5180 MHz – Peak

Undesirable emission
IEEE 802.11ac VHT20



Antenna Chain 0

Antenna Chain 1

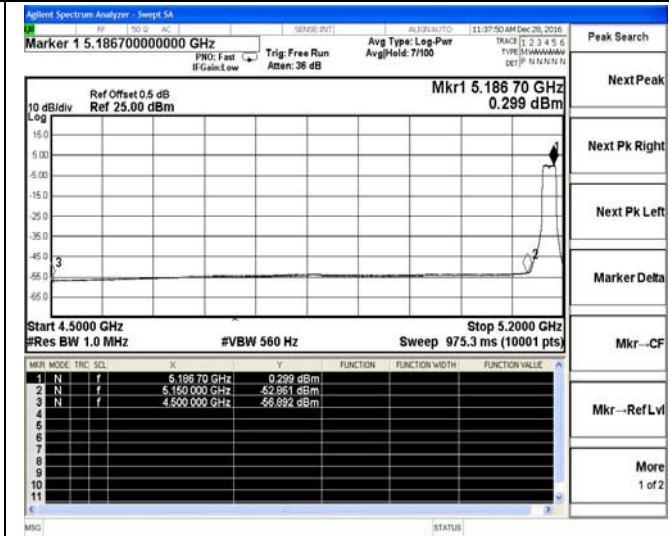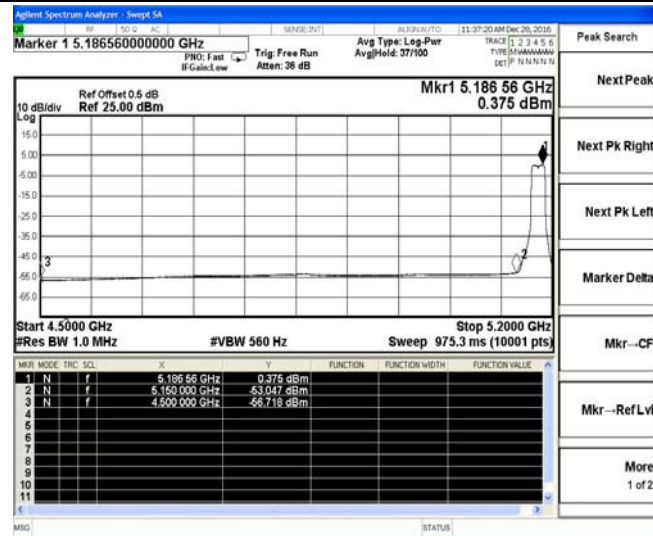



Channel 36 / 5180 MHz – Average

Channel 36 / 5180 MHz – Average

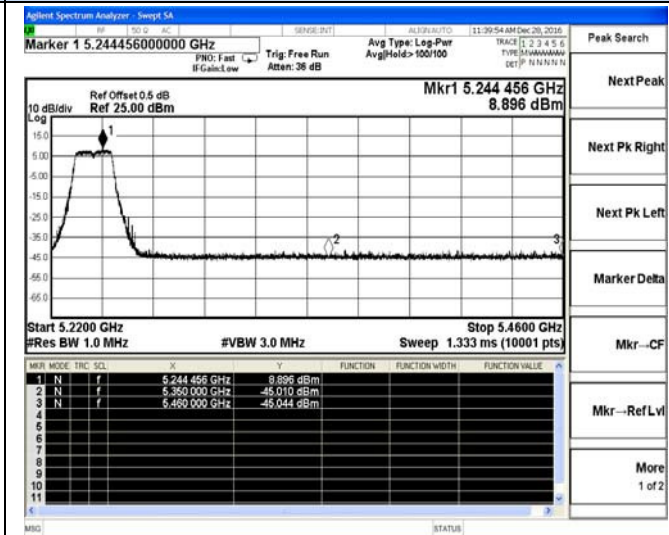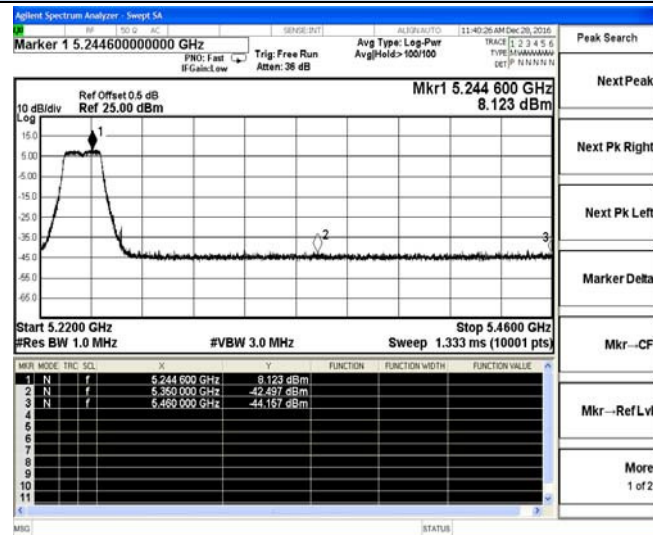

Channel 48 / 5240 MHz – Peak

Channel 48 / 5240 MHz – Peak

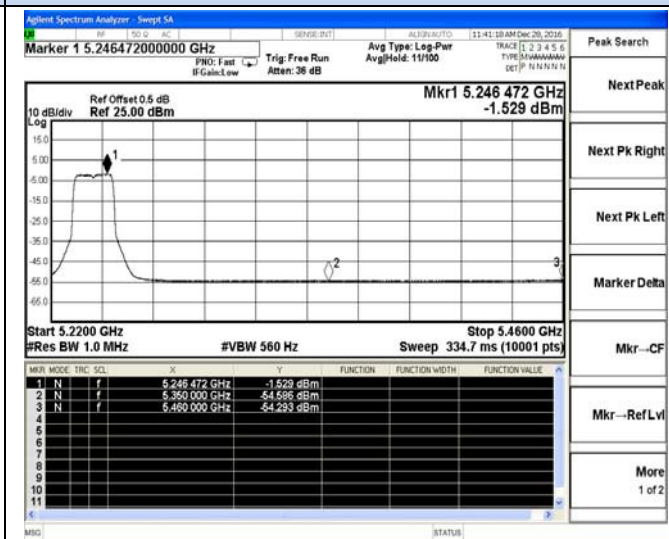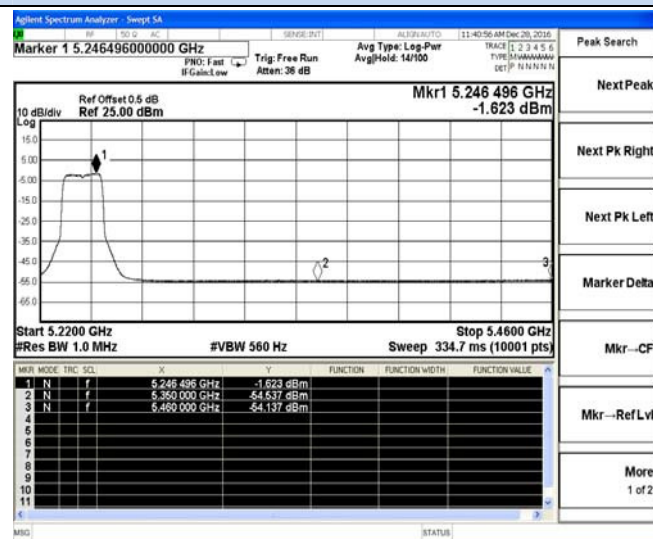



Channel 48 / 5240 MHz – Average

Channel 48 / 5240 MHz – Average

Undesirable emission
IEEE 802.11n HT40



Antenna Chain 0

Antenna Chain 1

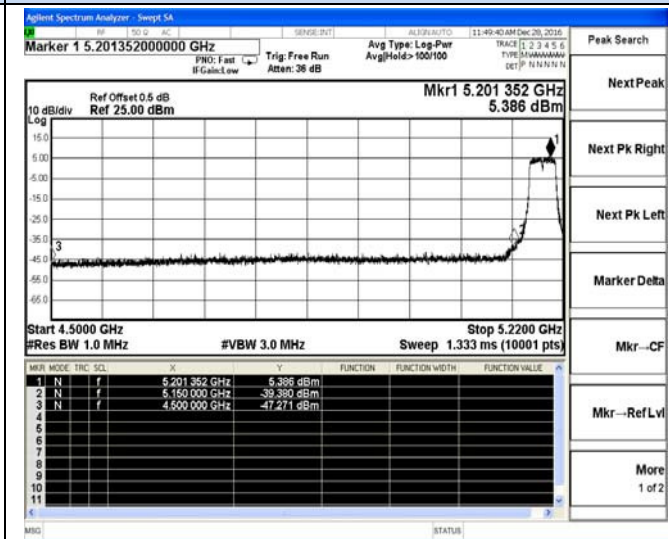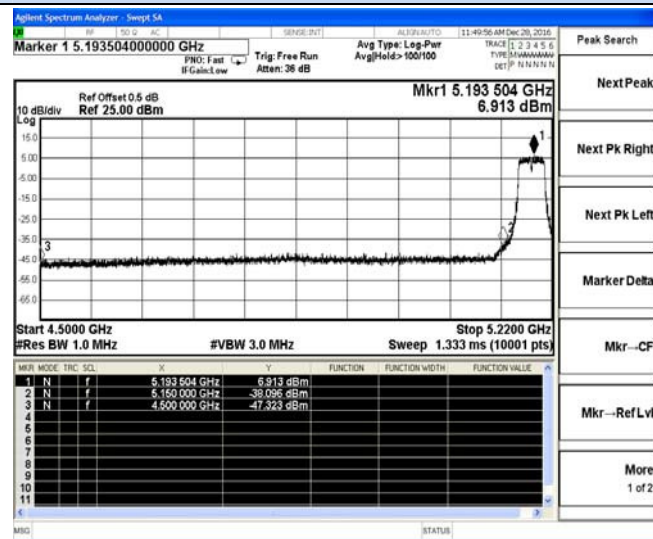



Channel 38 / 5190 MHz – Peak

Channel 38 / 5190 MHz – Peak

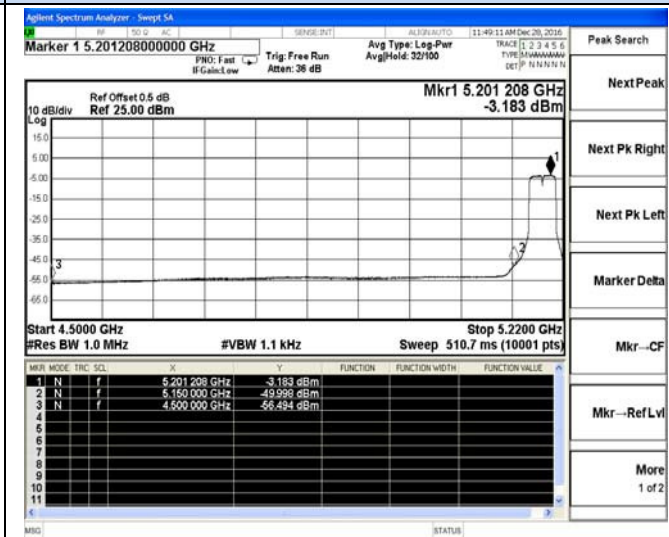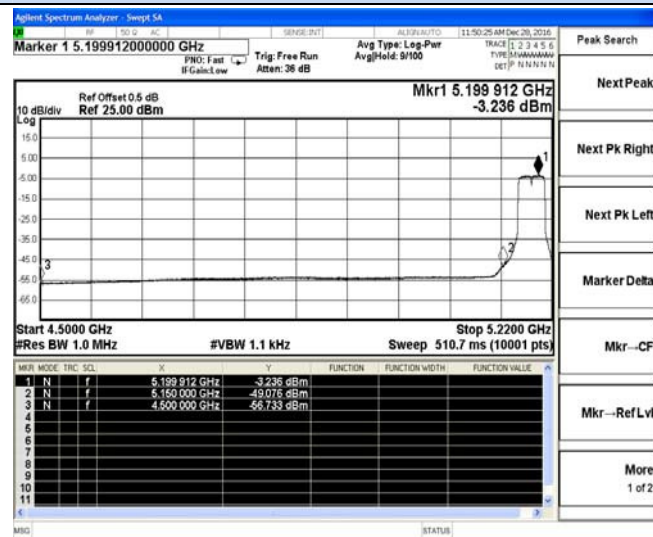

Channel 38 / 5190 MHz – Average

Channel 38 / 5190 MHz – Average

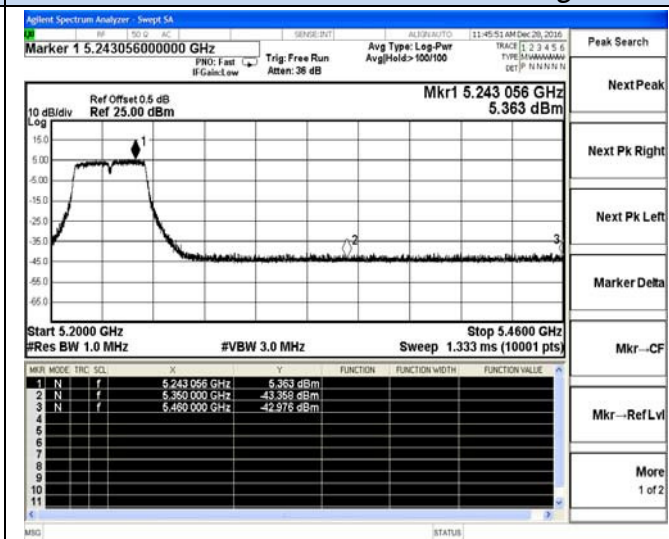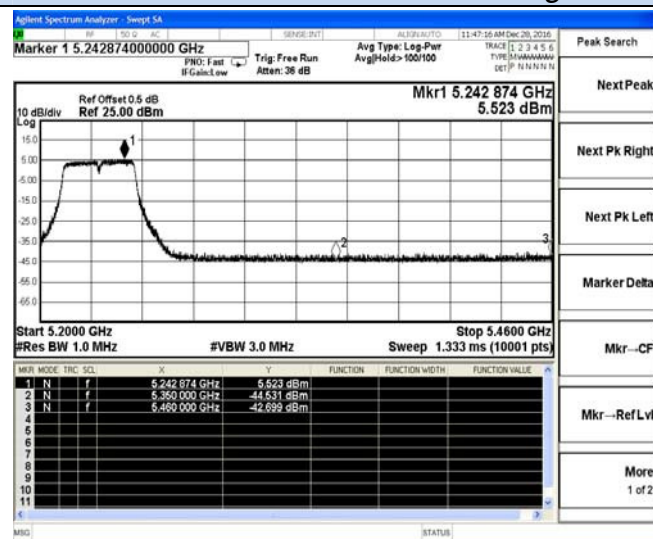



Channel 46 / 5230 MHz – Peak

Channel 46 / 5230 MHz – Peak

Undesirable emission
IEEE 802.11n HT40

Antenna Chain 0



Antenna Chain 1

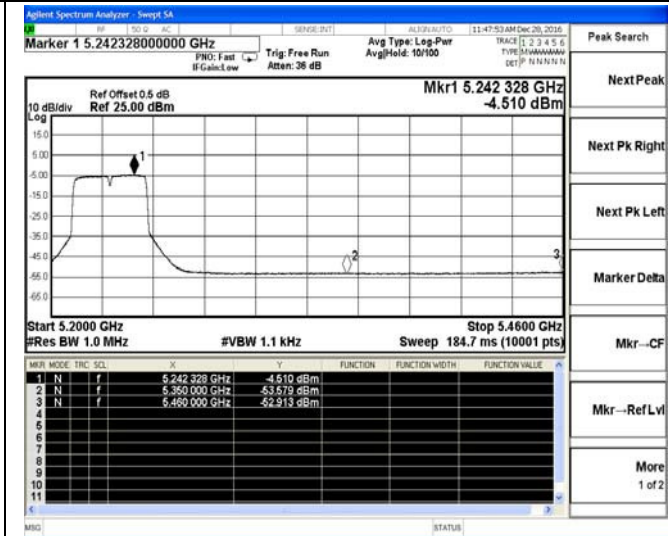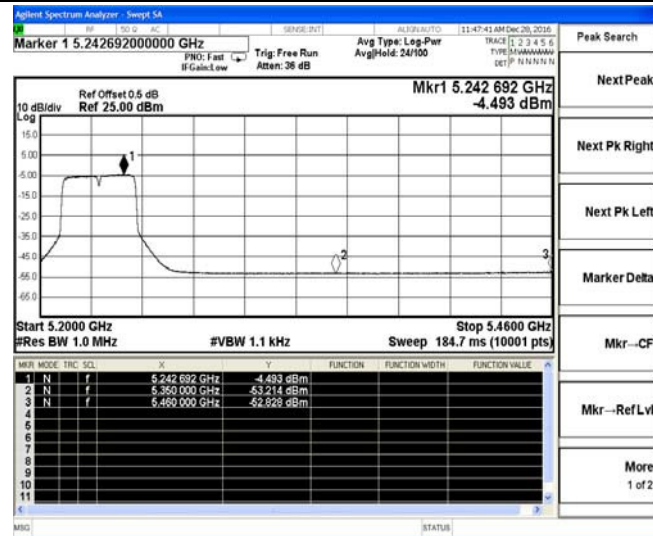

Channel 46 / 5230 MHz – Average



Channel 46 / 5230 MHz – Average

IEEE 802.11ac VHT40

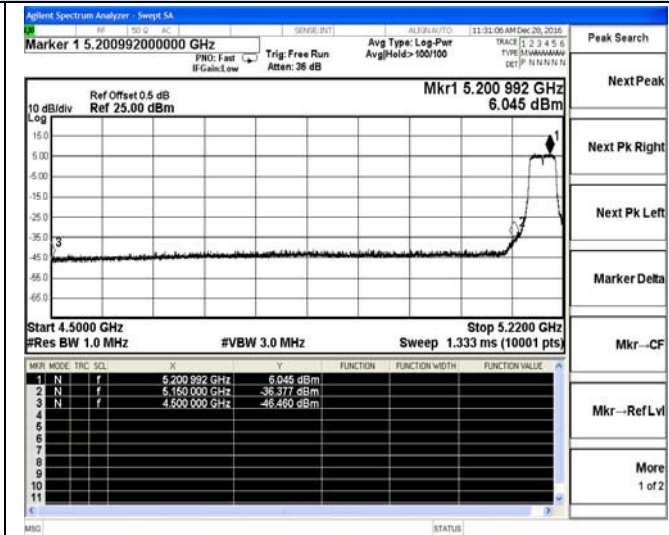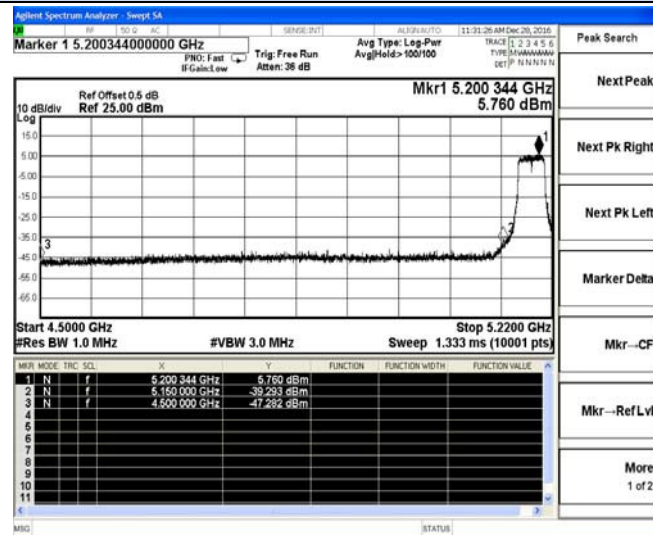

Channel 38 / 5190 MHz – Peak

Channel 38 / 5190 MHz – Peak

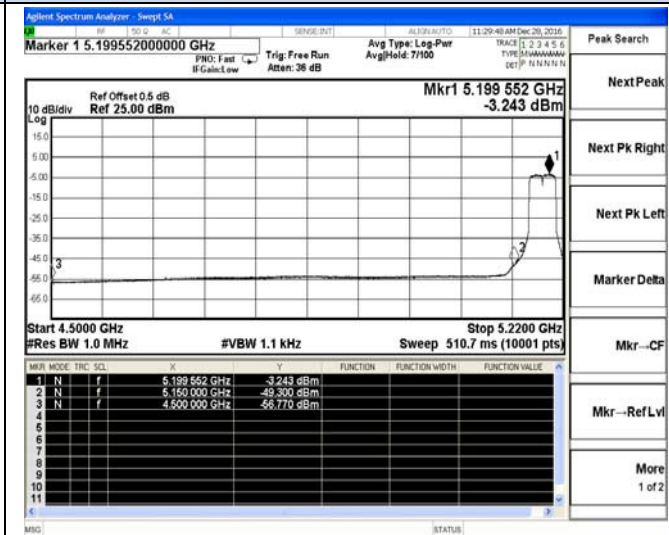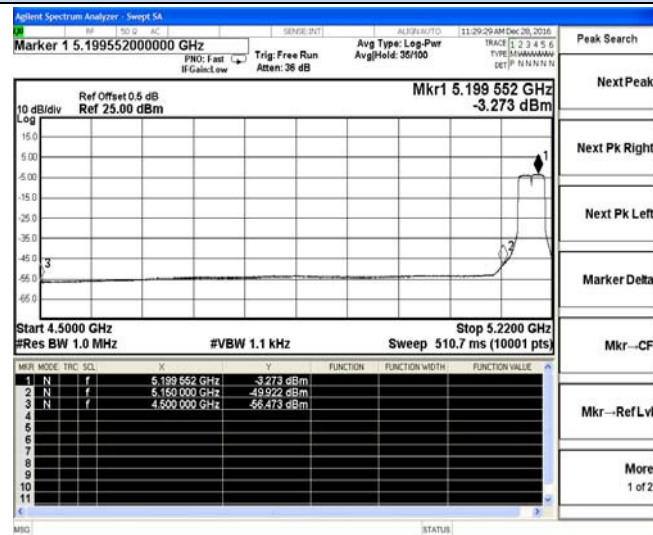



Channel 38 / 5190 MHz – Average

Channel 38 / 5190 MHz – Average

Undesirable emission
IEEE 802.11ac VHT40



Antenna Chain 0

Antenna Chain 1

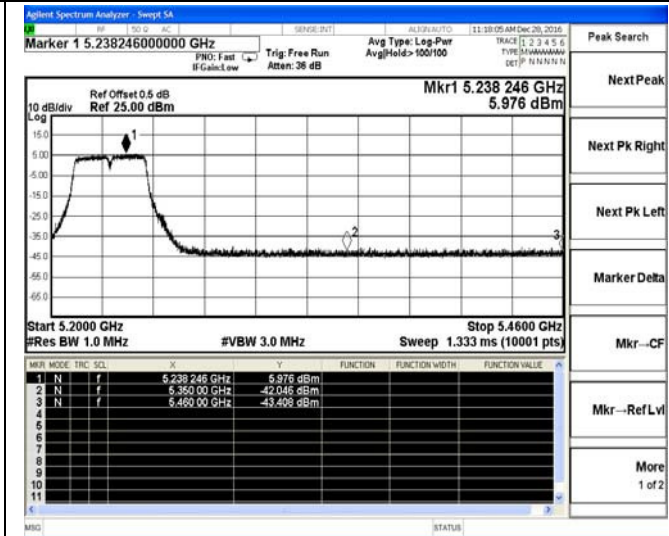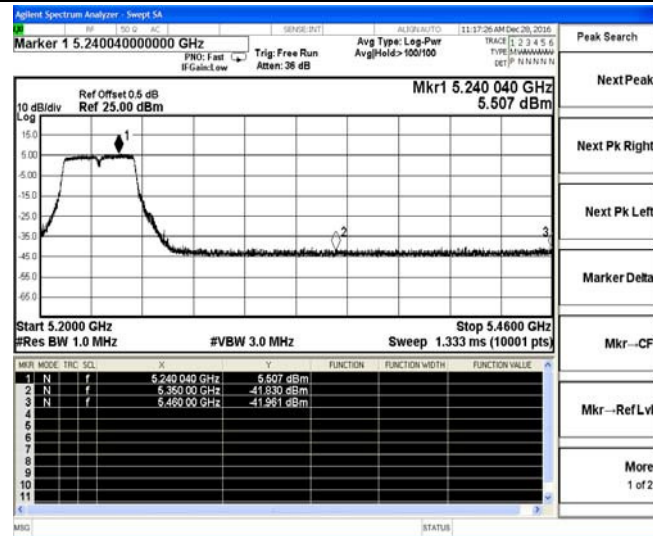

Channel 46 / 5230 MHz – Peak



Channel 46 / 5230 MHz – Peak

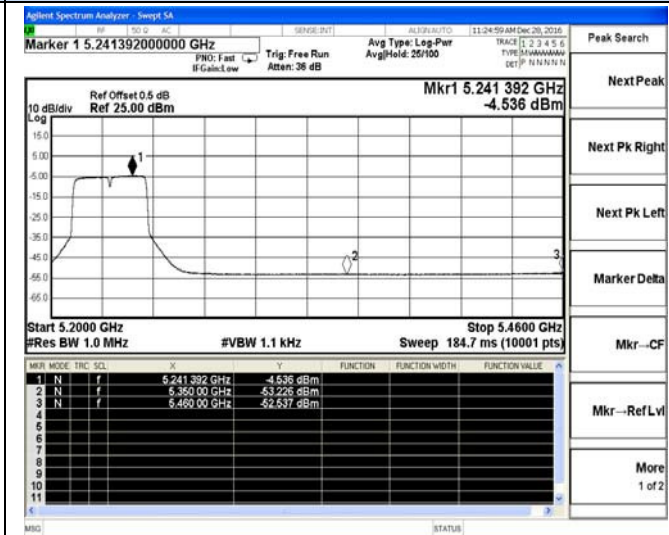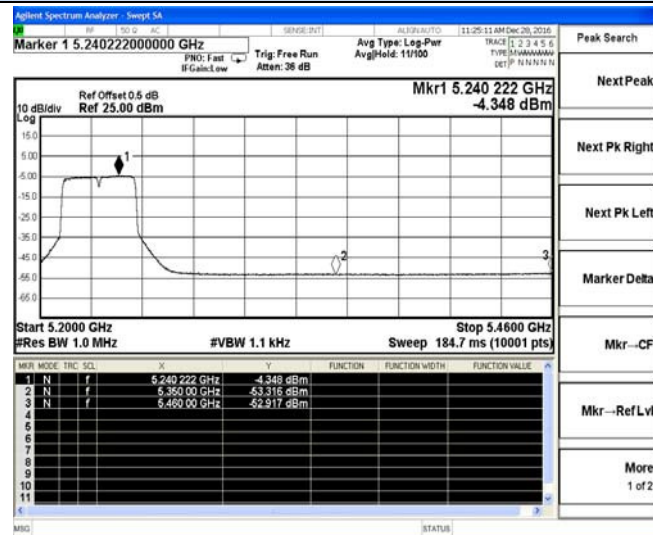

Channel 46 / 5230 MHz – Average

Channel 46 / 5230 MHz – Average

IEEE 802.11ac VHT80

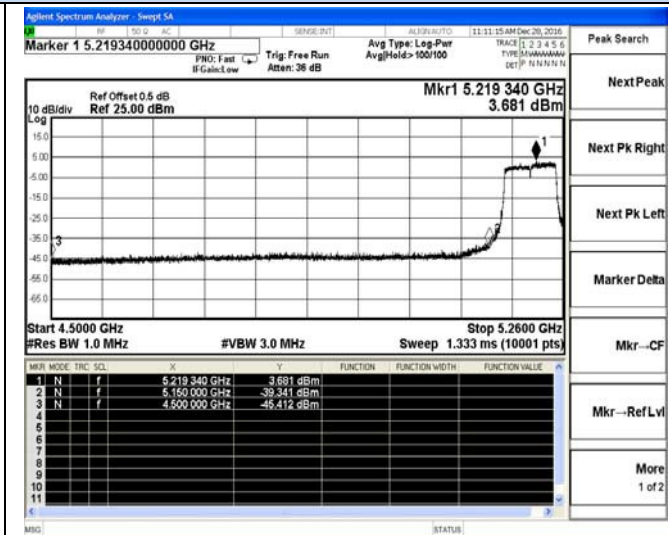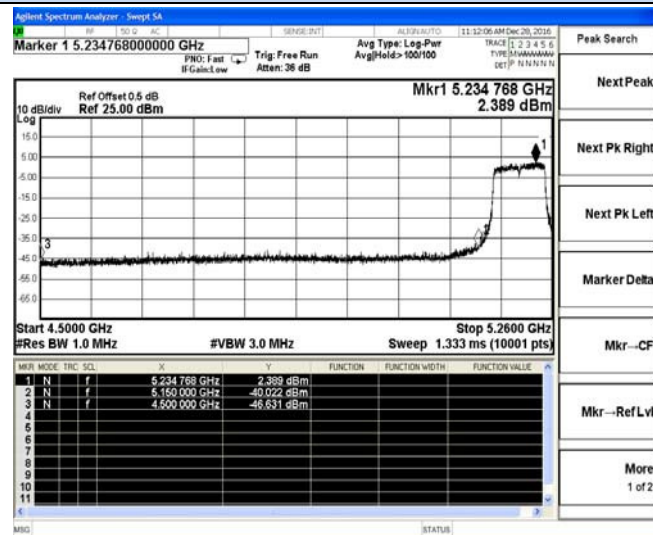



Channel 42 / 5210 MHz – Peak

Channel 42 / 5210 MHz – Peak

Undesirable emission
IEEE 802.11ac VHT80



Antenna Chain 0

Antenna Chain 1

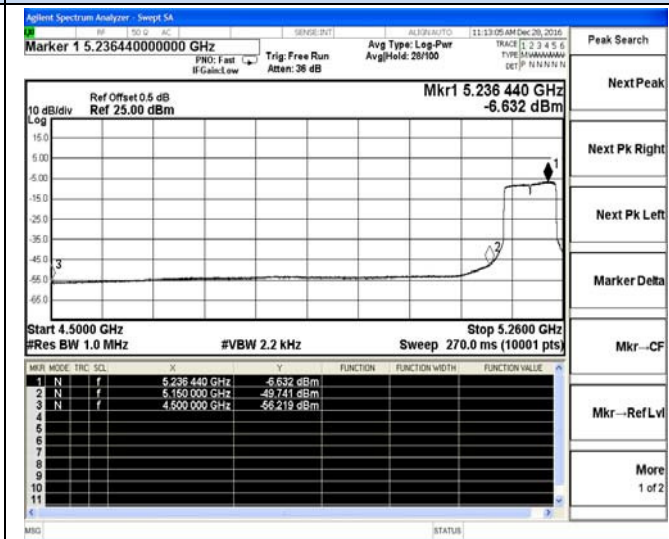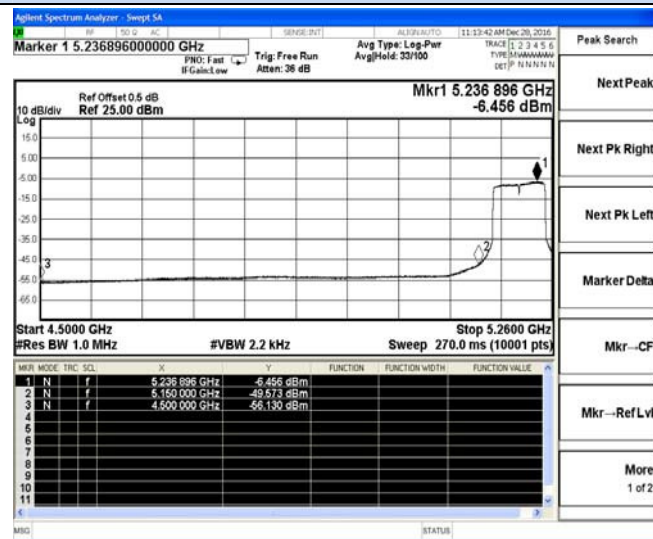



Channel 42 / 5210 MHz – Average

Channel 42 / 5210 MHz – Average

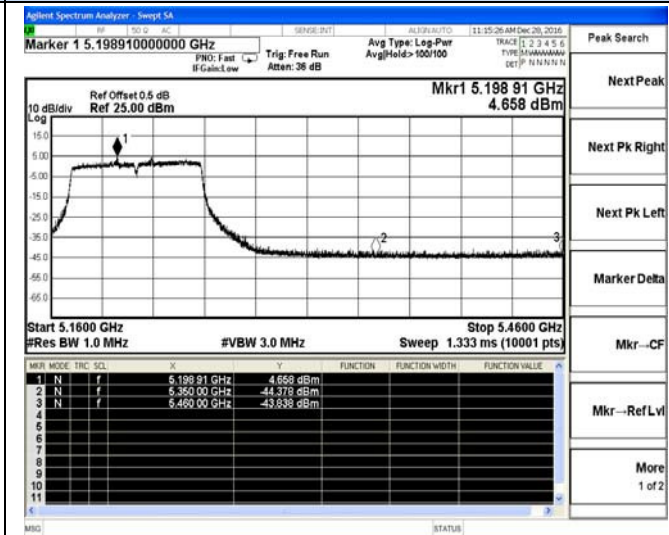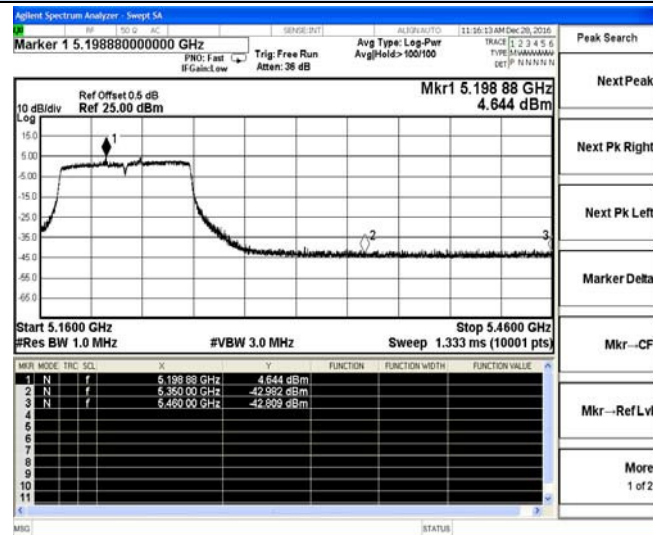

Channel 42 / 5210 MHz – Peak

Channel 42 / 5210 MHz – Peak

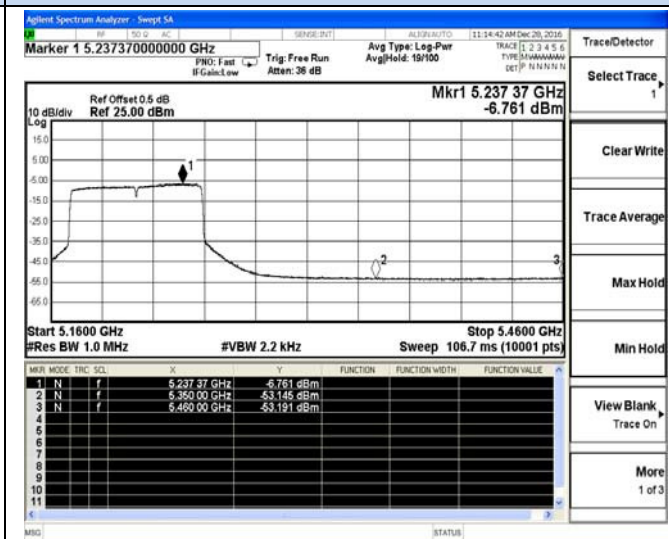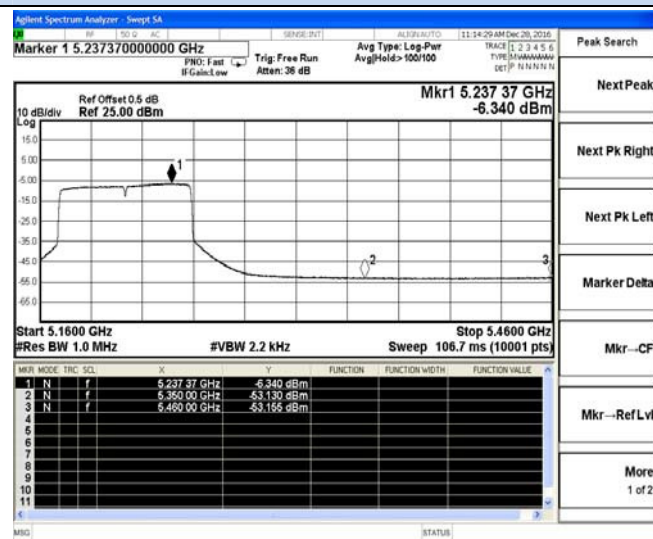

Channel 42 / 5210 MHz – Average

Channel 42 / 5210 MHz – Average

5.8. Antenna Requirements

5.8.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.8.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 2.15dBi which is an R-SMA antenna and no consideration of replacement. Please see EUT photo for details.

5.8.3. Results: Compliance.

Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

Conducted power refers ANSI C63.10:2013 Output power test procedure for UNII devices.

Radiated power refers to ANSI C63.10:2013 Radiated emissions tests.

Measurement parameters

Measurement parameter	
Detector:	Peak
Sweep Time:	Auto
Resolution bandwidth:	1MHz
Video bandwidth:	3MHz
Trace-Mode:	Max hold

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For 5G WLAN devices, the IEEE 802.11a mode is used.

Limits

FCC	ISED
Antenna Gain	
6 dBi	

Antenna Chain 0

T _{nom}	V _{nom}	Lowest Channel 5180 MHz	Middle Channel 5220 MHz	Highest Channel 5240 MHz
Conducted power [dBm] Measured with OFDM modulation		7.582	7.843	7.801
Radiated power [dBm] Measured with OFDM modulation		8.467	9.215	8.869
Gain [dBi] Calculated		0.885	1.372	1.068
Measurement uncertainty			± 1.6 dB (cond.) / ± 3.8 dB (rad.)	

Antenna Chain 1

T _{nom}	V _{nom}	Lowest Channel 5180 MHz	Middle Channel 5220 MHz	Highest Channel 5240 MHz
Conducted power [dBm] Measured with OFDM modulation		7.729	7.914	7.885
Radiated power [dBm] Measured with OFDM modulation		8.596	9.305	8.893
Gain [dBi] Calculated		0.867	1.391	1.008
Measurement uncertainty			± 1.6 dB (cond.) / ± 3.8 dB (rad.)	

6. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	June 18, 2016	June 17, 2017
Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	9kHz-40GHz	July 16, 2016	July 15, 2017
Signal analyzer	Agilent	N9020A	MY50510140	9kHz~26.5GHz	October 27, 2017	October 27, 2017
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	June 18, 2016	June 17, 2017
LISN (Support Unit)	EMCO	3819/2NM	9703-1839	9KHz-30MHz	June 18, 2016	June 17, 2017
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	June 18, 2016	June 17, 2017
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	June 18, 2016	June 17, 2017
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-18GHz 3m	June 18, 2016	June 17, 2017
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	June 18, 2016	June 17, 2017
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	July 16, 2016	July 15, 2017
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz-40GHz	July 16, 2016	July 15, 2017
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	June 18, 2016	June 17, 2017
By-log Antenna	SCHWARZBEC	VULB9163	9163-470	30MHz-1GHz	June 10, 2016	June 09, 2017
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	June 10, 2016	June 09, 2017
Horn Antenna	SCHWARZBEC	BBHA9170	BBHA9170154	15GHz-40GHz	June 10, 2016	June 09, 2017
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	June 18, 2016	June 17, 2017
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	June 18, 2016	June 17, 2017
Power Meter	R&S	NRVS	100444	DC-40GHz	June 18, 2016	June 17, 2017
Power Sensor	R&S	NRV-Z51	100458	DC-30GHz	June 18, 2016	June 17, 2017
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	June 18, 2016	June 17, 2017
AC Power Source	HPC	HPA-500E	HPA-9100024	AC 0-300V	June 18, 2016	June 17, 2017
DC power source	GW	GPC-6030D	C671845	DC 1V-60V	June 18, 2016	June 17, 2017
Temp. and Humidify Chamber	Giant Force	GTH-225-20-S	MAB0103-00	N/A	June 18, 2016	June 17, 2017
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	June 18, 2016	June 17, 2017
RF CABLE-2m	JYE Bao	RG142	CB)35-2m	20MHz-1GHz	June 18, 2016	June 17, 2017
EMC Test software	Audix	E3	N/A	N/A	N/A	N/A

Note: All equipment through GRGT EST calibration

-----THE END OF REPORT-----