

# TEST REPORT

Report No.: BCTC2210176845-2E

---

Applicant: Shenzhen Joway Power Supply Co., Ltd.

---

Product Name: Wireless Portable Charger

---

Model/Type  
reference: W5

---

Tested Date: 2022-10-21 to 2022-10-30

---

Issued Date: 2022-10-31

---

**Shenzhen BCTC Testing Co., Ltd.**



## FCC ID: 2AEZ4-W5

Product Name: Wireless Portable Charger  
Trademark: N/A  
Model/Type reference: W5  
Prepared For: Shenzhen Joway Power Supply Co., Ltd.  
Address: Blog 10th & 11th, Antuoshan High-Tech Industrial Park, Shajing Street, Shenzhen, China  
Manufacturer: Shenzhen Joway Power Supply Co., Ltd.  
Address: Blog 10th & 11th, Antuoshan High-Tech Industrial Park, Shajing Street, Shenzhen, China  
Prepared By: Shenzhen BCTC Testing Co., Ltd.  
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: 2022-10-21  
Sample tested Date: 2022-10-21 to 2022-10-30  
Issue Date: 2022-10-31  
Report No.: BCTC2210176845-2E  
Test Standards: FCC CFR 47 part1, 1.1307(b), 1.1310  
Test Results: PASS

Tested by:



Eric Yang/Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.




## Table Of Content

Test Report Declaration	Page
1. Version .....	4
2. Product Information .....	5
2.1 Product Information .....	5
2.2 Support Equipment .....	5
2.3 Test Mode .....	5
3. Test Facility And Test Instrument Used.....	6
3.1 Test Facility .....	6
3.2 Test Instrument Used.....	6
4. Method Of Measurement.....	7
4.1 Applicable Standard .....	7
4.2 Block Diagram Of Test Setup.....	7
4.3 Limit .....	8
4.4 Test procedure .....	8
4.5 Equipment Approval Considerations.....	9
4.6 E and H field Strength .....	10
5. Photographs Of Test Set-Up .....	13

(Note: N/A Means Not Applicable)


TC  
3C  
PPR  
測

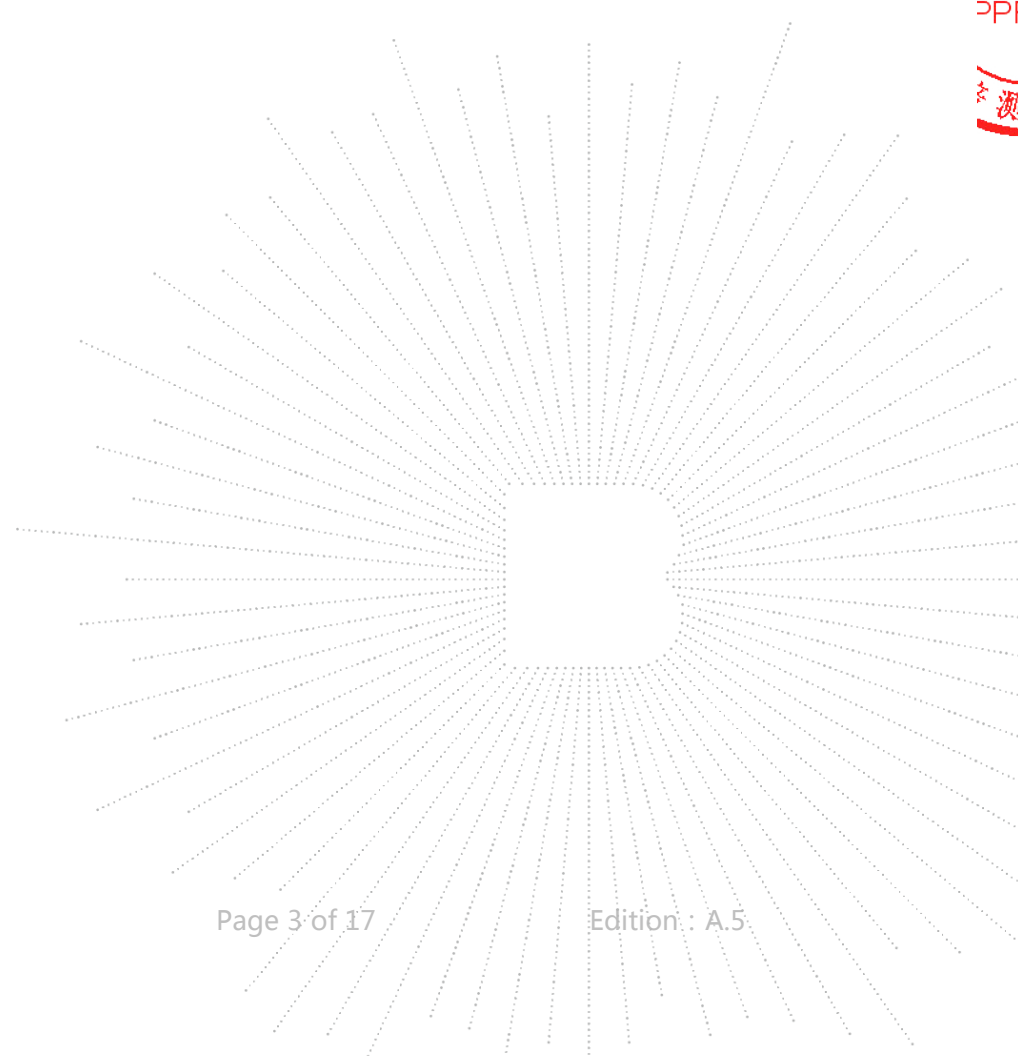

**1. Version**

Report No.	Issue Date	Description	Approved
BCTC2210176845-2E	2022-10-31	Original	Valid

TEC  
TC  
OVER  
檢

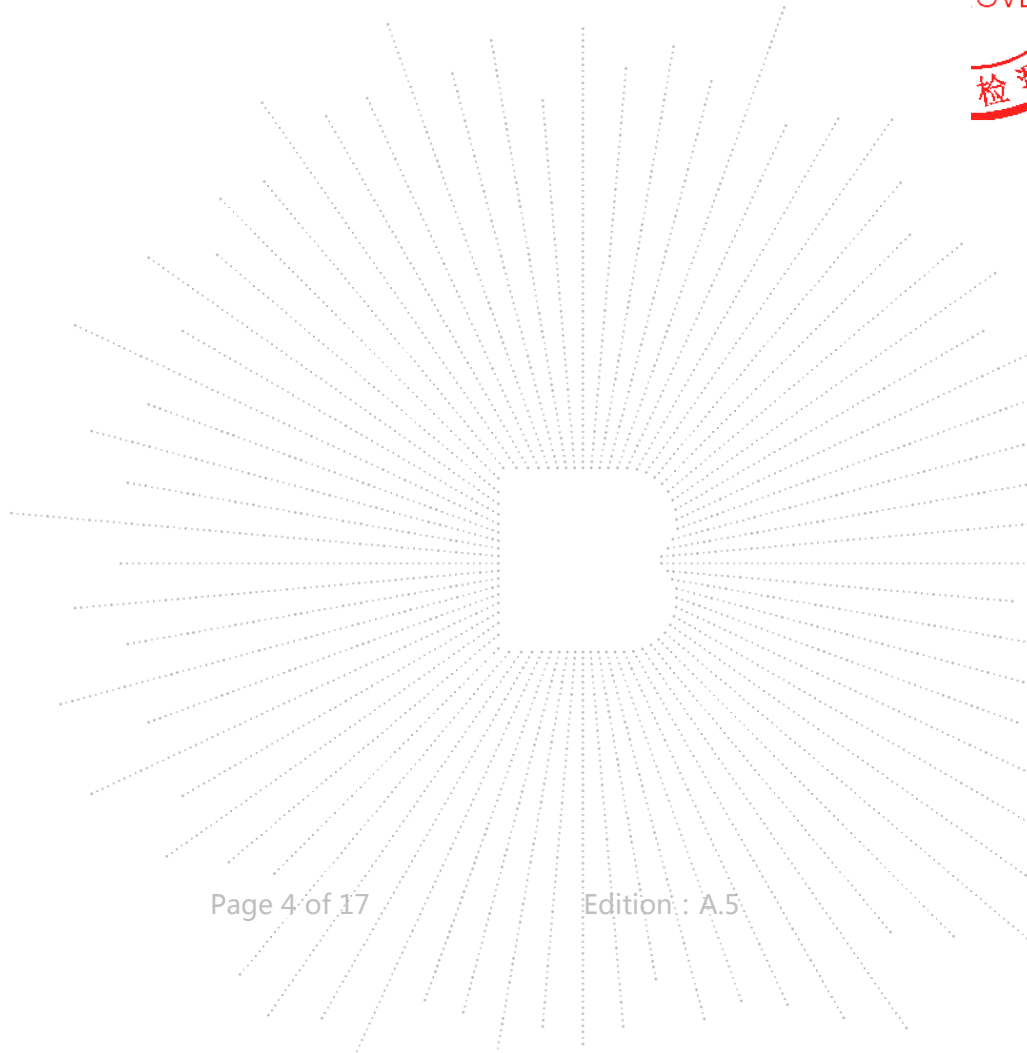

## 2. Product Information

### 2.1 Product Information

Model/Type reference: W5  
 Model differences: N/A  
 Product Description: Wireless Portable Charger  
 Operation Frequency: 115kHz-205kHz  
 Antenna installation: loop coil antenna  
 Ratings: Input(Type-C): 5V 2A  
               Output(Type-C): 5V 2.4A  
               Output(USB-A): 5V 2.4A  
               Output(Wireless charger): 10W(Max)  
               Total Output: 5V 2.4VA

### 2.2 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
1	Mobile phone	Apple	11	N/A	Auxiliary
2	Adapter	N/A	CD122	N/A	Auxiliary

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### 2.3 Test Mode

Test Mode	Keeping TX+Charging mode
-----------	--------------------------




### 3. Test Facility And Test Instrument Used

#### 3.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.  
 FCC Test Firm Registration Number: 712850  
 IC Registered No.: 23583

#### 3.2 Test Instrument Used

EMF Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Electro magnetic radiation tester	Wavecontrol	SMP160	19SN0980	May 26, 2022	May 25, 2023
Electro magnetic field probe	Wavecontrol	WP400-3	20WP120082	Aug. 27, 2020	Aug. 26, 2023
843 Chamber	ETS	843	84301	Aug. 27, 2020	Aug. 26, 2023
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

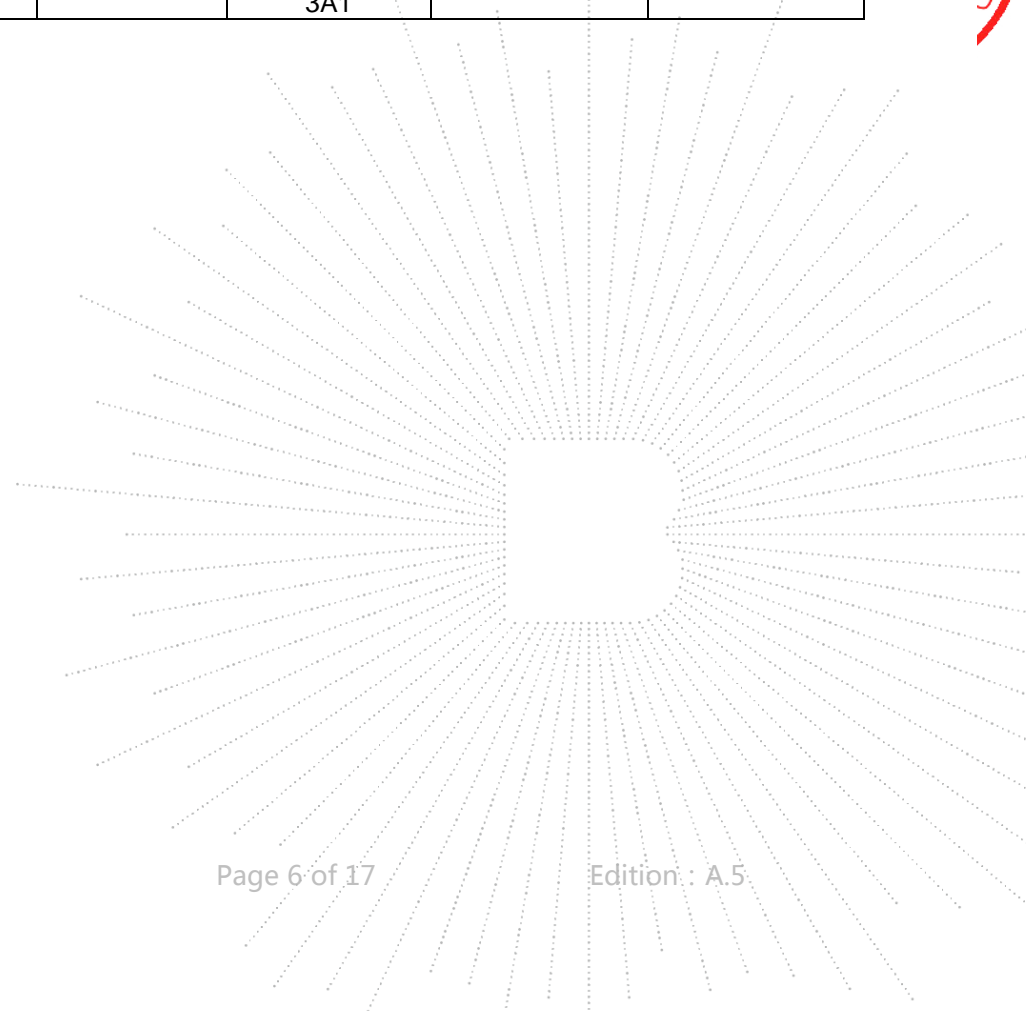



## 4. Method Of Measurement

### 4.1 Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01v03: RF Exposure Wireless Charging Apps v02.

### 4.2 Block Diagram Of Test Setup

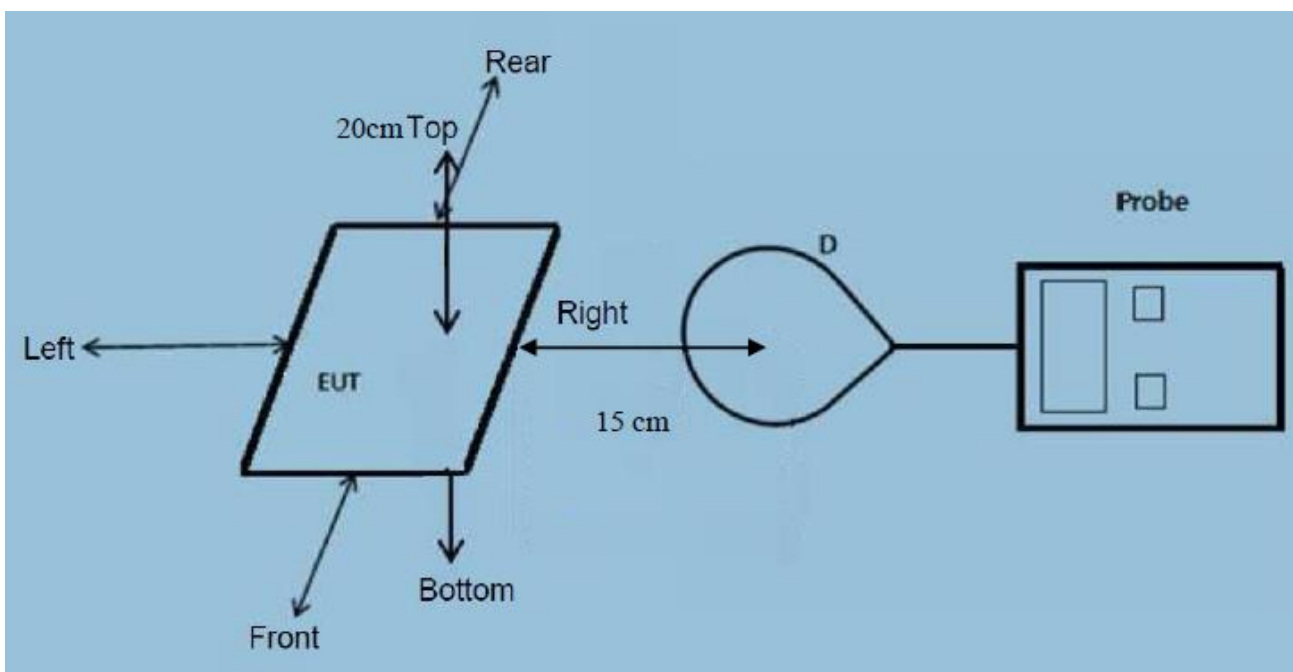

Note: Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device

### 4.3 Limit

Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180 / f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1	30

### 4.4 Test procedure

- a) The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- b) The measurement probe was placed at test distance (15cm) which is between the edge of the charger and the geometric centre of probe.
- c) The turn table was rotated 360d degree to search of highest strength.
- d) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- e) The EUT were measured according to the dictates of KDB 680106D01v03r01.



#### 4.5 Equipment Approval Considerations

The EUT does comply with item 5(b) of KDB 680106 D01v03r01

1) Power transfer frequency is less than 1MHz

Yes, the device operate in the frequency range from 115-205KHz

2) Output power from each primary coil is less than or equal to 15 watts.

Yes, the maximum output power of the primary coil is 10W.

3) The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.

Yes, the transfer system includes only single primary coil.

4) Client device is inserted in or placed directly in contact with the transmitter.

Yes, client device is placed directly in contact with the transmitter.

5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

No, the EUT is a portable Wireless charger Wireless Portable Charger.

6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Yes, the EUT field strength levels are 10% x MPE limit.



#### 4.6 E and H field Strength

H-Field Strength at 0 cm surrounding the EUT and 0cm above the top surface of the EUT

Battery level	Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	10% Limits Test (A/m)	Limits Test (A/m)
100%	0.115-0.205	0.074	0.070	0.079	0.063	0.077	0.163	1.63

H-Field Strength at 2 cm surrounding the EUT and 2cm above the top surface of the EUT

Battery level	Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	10% Limits Test (A/m)	Limits Test (A/m)
100%	0.115-0.205	0.061	0.074	0.070	0.080	0.080	0.163	1.63

H-Field Strength at 4 cm surrounding the EUT and 4cm above the top surface of the EUT

Battery level	Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	10% Limits Test (A/m)	Limits Test (A/m)
100%	0.115-0.205	0.063	0.072	0.078	0.070	0.066	0.163	1.63

H-Field Strength at 6 cm surrounding the EUT and 6cm above the top surface of the EUT

Battery level	Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	10% Limits Test (A/m)	Limits Test (A/m)
100%	0.115-0.205	0.076	0.060	0.074	0.072	0.074	0.163	1.63

H-Field Strength at 8 cm surrounding the EUT and 8cm above the top surface of the EUT

Battery level	Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	10% Limits Test (A/m)	Limits Test (A/m)
100%	0.115-0.205	0.064	0.071	0.069	0.067	0.078	0.163	1.63

TEST  
 TO  
 OVER  
 検査

## H-Field Strength at 10 cm surrounding the EUT and 10cm above the top surface of the EUT

Battery level	Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	10% Limits Test (A/m)	Limits Test (A/m)
100%	0.115-0.205	0.079	0.074	0.065	0.080	0.072	0.163	1.63

## H-Field Strength at 12 cm surrounding the EUT and 12cm above the top surface of the EUT

Battery level	Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	10% Limits Test (A/m)	Limits Test (A/m)
100%	0.115-0.205	0.080	0.075	0.072	0.066	0.074	0.163	1.63

## H-Field Strength at 14 cm surrounding the EUT and 14cm above the top surface of the EUT

Battery level	Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	10% Limits Test (A/m)	Limits Test (A/m)
100%	0.115-0.205	0.075	0.063	0.076	0.065	0.074	0.163	1.63

## H-Field Strength at 16 cm surrounding the EUT and 16cm above the top surface of the EUT

Battery level	Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	10% Limits Test (A/m)	Limits Test (A/m)
100%	0.115-0.205	0.066	0.071	0.066	0.078	0.074	0.163	1.63

## H-Field Strength at 18 cm surrounding the EUT and 18cm above the top surface of the EUT


Battery level	Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	10% Limits Test (A/m)	Limits Test (A/m)
100%	0.115-0.205	0.068	0.080	0.070	0.077	0.077	0.163	1.63



## H-Field Strength at 20 cm surrounding the EUT and 20cm above the top surface of the EUT

Battery level	Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	10% Limits Test (A/m)	Limits Test (A/m)
100%	0.115-0.205	0.068	0.072	0.062	0.061	0.070	0.163	1.63

CO., LTD

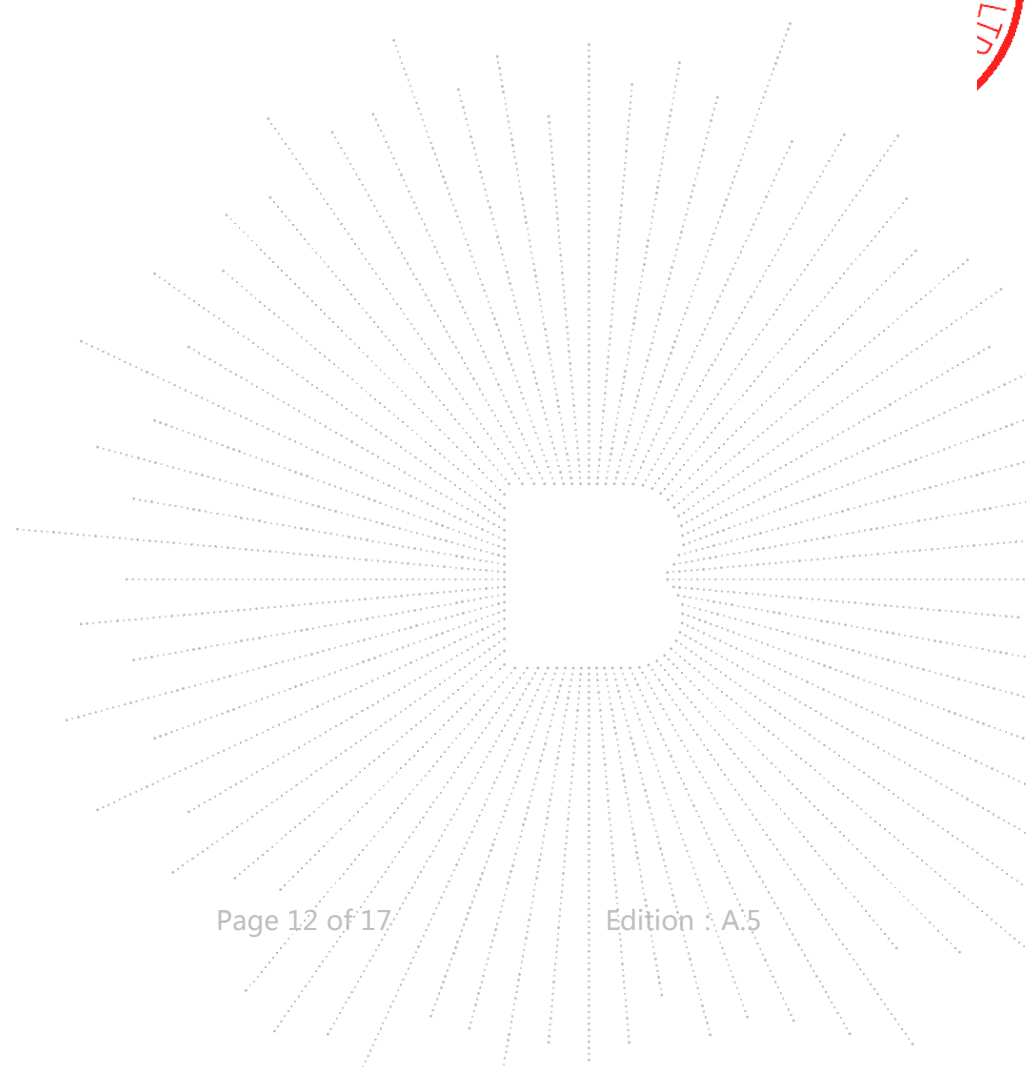

**5. Photographs Of Test Set-Up**







C T  
CT  
PROV  
测检





## STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The test report without CMA mark is only used for scientific research, teaching, enterprise product development and internal quality control purposes.
8. The quality system of our laboratory is in accordance with ISO/IEC17025.
9. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL : 400-788-9558

P.C.: 518103

FAX : 0755-33229357

Website : <http://www.chnbctc.com>

E-Mail : [bctc@bctc-lab.com.cn](mailto:bctc@bctc-lab.com.cn)

\*\*\*\*\* END \*\*\*\*\*

