



# SPECIFICATION FOR APPROVAL

Customer name: BeiNaiTe

Product name: 2.4G copper wire antenna

Customer Part Number: \_\_\_\_\_

Manufacturers of Material: SFANT12E1239

Deliver quantity: 5PCS

Mark	Check	Examine and approve	Datelanded
Biao	Lisen	Amy	2022.10.21

That Customers:

Acknowledge	Check	Examine and approve	Datelanded

Admit that situation: new product  product shanges

Admit that project: acknowledgement soecimen 10PCS

Admit that conclusion: reception refuse

Company address : Floor 3, Building D, No.96 Lingxia Road, Fuyong Fenghuang Fourth Industrial Zone, Baoan District, Shenzhen

Phone number: 0755-33881455

Fax NO.: 0755-33233276

Email: [liqinghui@sufeitech.com](mailto:liqinghui@sufeitech.com)

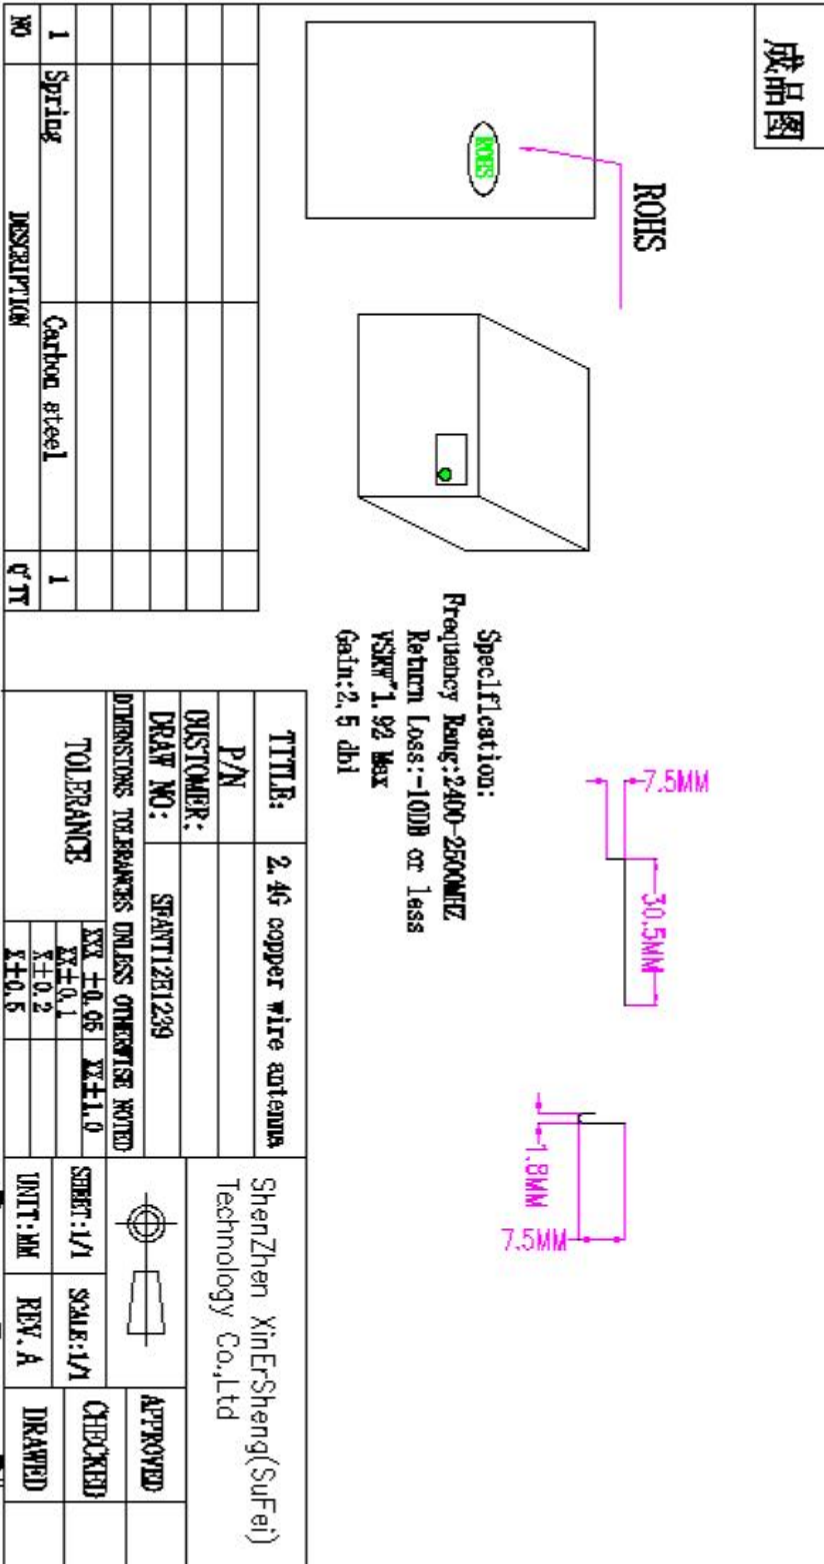
## Main technical parameters of the product

<b>Main technical specifications</b>	
<b>Frequency Range(MHZ)</b>	<b>2400-2500</b>
<b>Gain (dBi)</b>	<b>2.5±0.5dBi</b>
<b>Impedance(Ω)</b>	<b>50±10</b>
<b>ReTurnLoss(dB)</b>	<b>≤-10</b>
<b>VSWR</b>	<b>≤2</b>
<b>Admitted Power</b>	<b>1W</b>
<b>Polarization</b>	<b>Linear Vertical</b>
<b>Connector Type</b>	<b>Weld</b>
<b>Physical Properties</b>	
<b>Antenna Base</b>	<b>Copper</b>
<b>Operating Temp</b>	<b>-20℃-+60℃</b>
<b>Storage Temp</b>	<b>-20℃-+70℃</b>

### List of raw materials:


Serial number	Name	Texture	Quantity	Unit	Remark
1	Copper wire	TPE	1	PCS	

## Product drawing




Network analyzer test report:









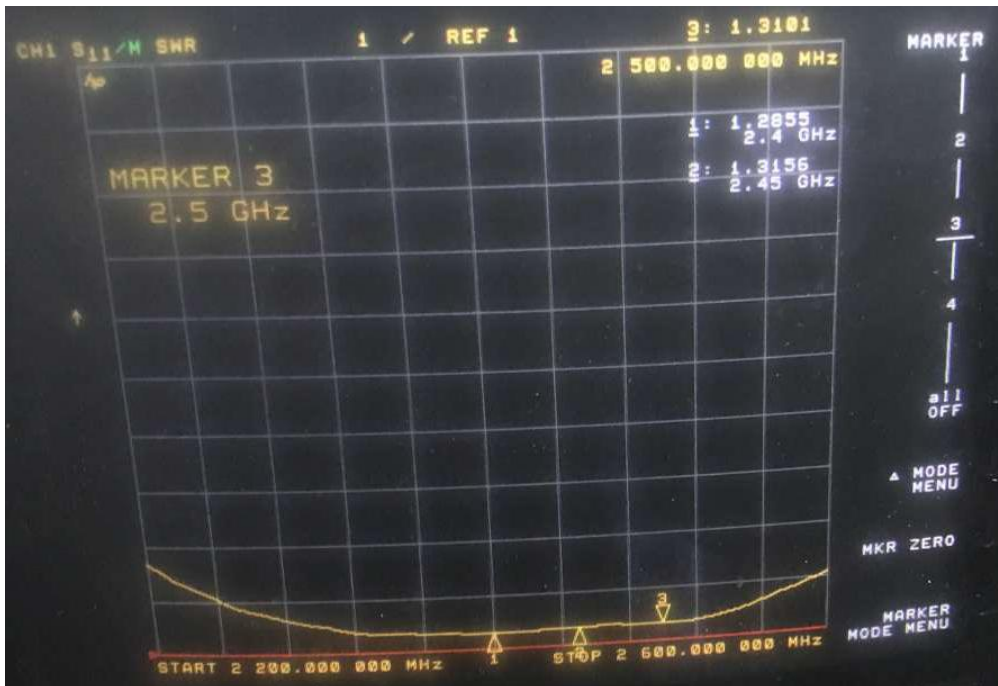
1. SWR:



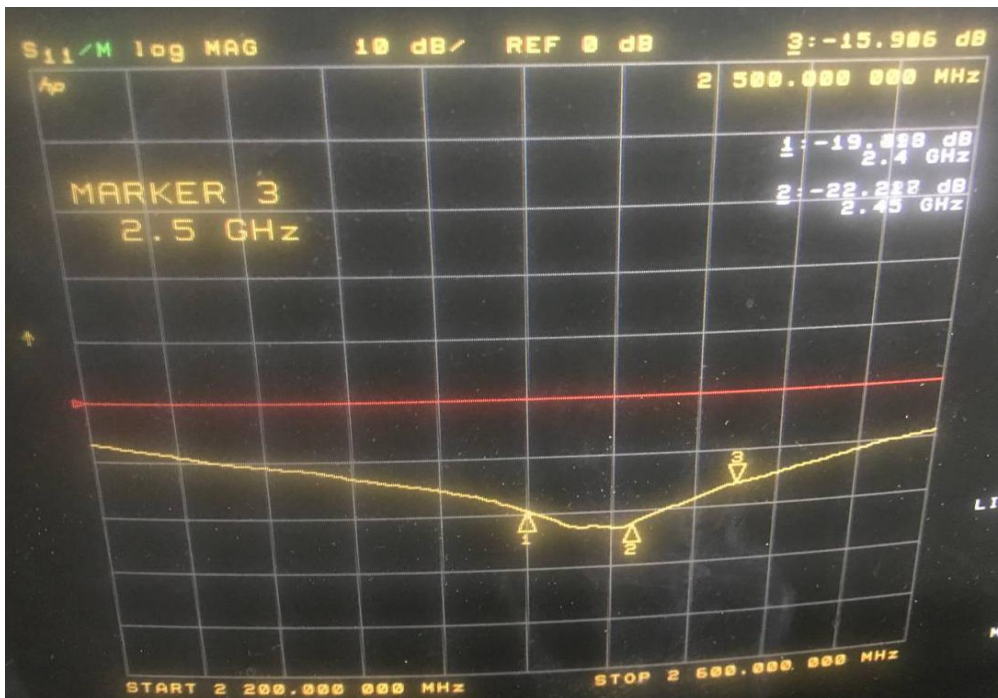2. return loss



2D、3DRaditation Pattern

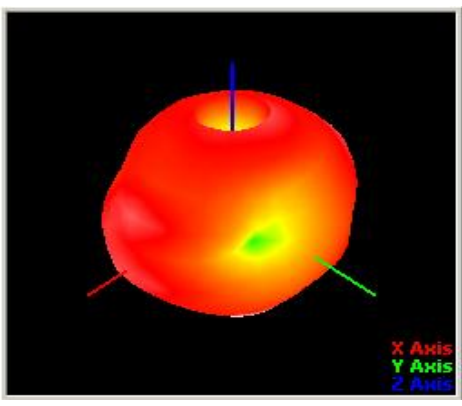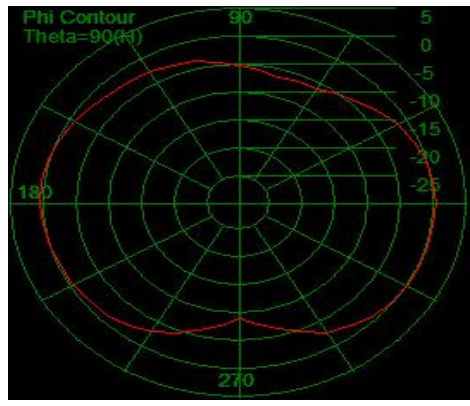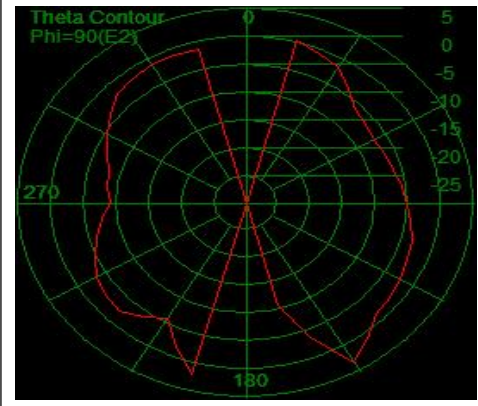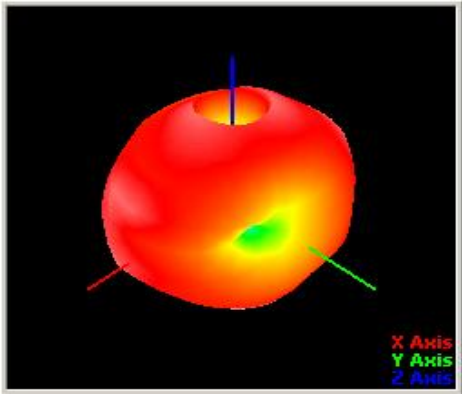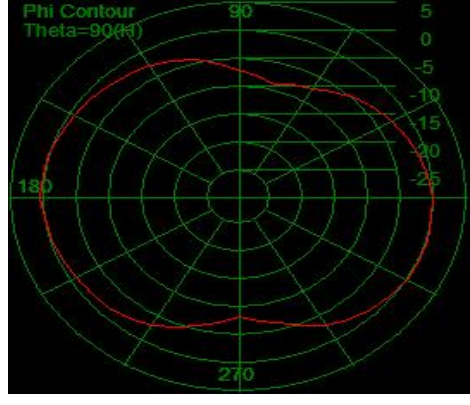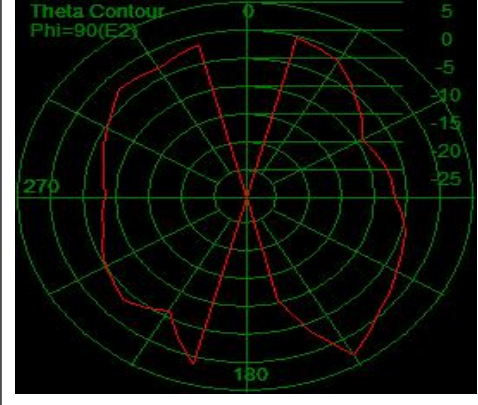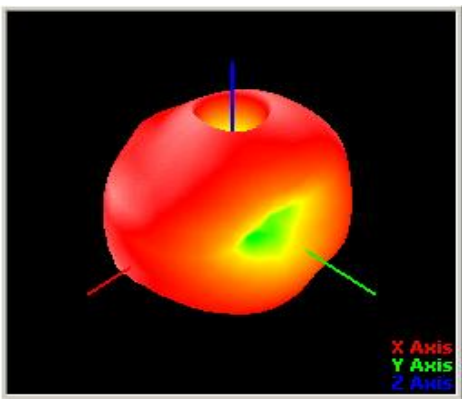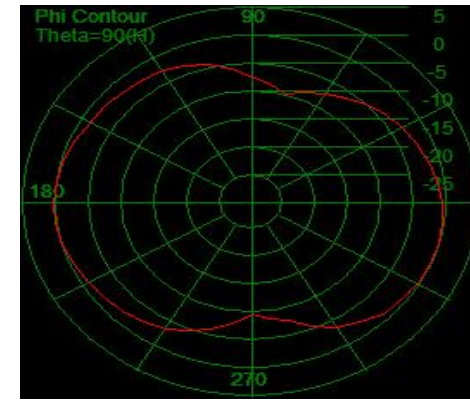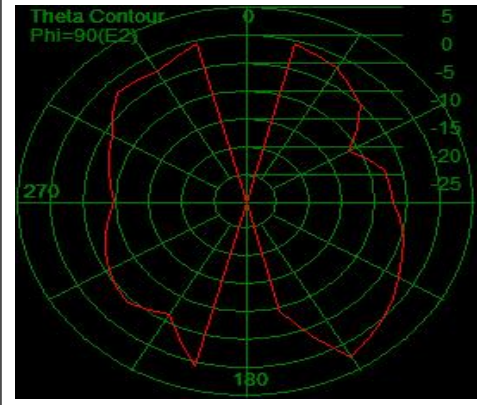 <p>X Axis Y Axis Z Axis</p>	 <p>Phi Contour Theta=90(φ)</p>	 <p>Theta Contour Phi=90(E2)</p>
<p>2.4G</p>	<p>Gain(Peak):2.5dBi</p>	<p>Efficiency:56.6%</p>
 <p>X Axis Y Axis Z Axis</p>	 <p>Phi Contour Theta=90(φ)</p>	 <p>Theta Contour Phi=90(E2)</p>
<p>2.45G</p>	<p>Gain(Peak):2.23 dBi</p>	<p>Efficiency:53.9%</p>
 <p>X Axis Y Axis Z Axis</p>	 <p>Phi Contour Theta=90(φ)</p>	 <p>Theta Contour Phi=90(E2)</p>
<p>2.5G</p>	<p>Gain(Peak):2.21dBi</p>	<p>Efficiency:54.8%</p>