

# FCC Radio Test Report

## FCC ID: 2AF2R-HB66RX

### Original Grant

**Report No.** : TB-FCC170521  
**Applicant** : Shenzhen Videotimes Technology Co.,Ltd  
**Equipment Under Test (EUT)**  
**EUT Name** : 2.4GHz Digital Wireless Video Baby Monitor  
**Model No.** : HB66RX  
**Series Model No.** : N/A  
**Brand Name** : HelloBaby  
**Receipt Date** : 2019-11-22  
**Test Date** : 2019-11-23 to 2020-01-16  
**Issue Date** : 2020-03-09  
**Standards** : FCC Part 15, Subpart C 15.247  
**Test Method** : ANSI C63.10: 2013  
**Conclusions** : **PASS**

In the configuration tested, the EUT complied with the standards specified above,  
The EUT technically complies with the FCC requirements

**Test/Witness Engineer** :

*Jack*



Jack Deng

**Engineer Supervisor** :

*IVAN SU*

Ivan Su

**Engineer Manager** :

*Ray Lai*

Ray Lai

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

---

---

## Contents

|   |           |
|---|-----------|
| <b>CONTENTS.....</b>  | <b>2</b>  |
| <b>1. GENERAL INFORMATION ABOUT EUT .....</b>                     | <b>5</b>  |
| 1.1 Client Information.....                                       | 5         |
| 1.2 General Description of EUT (Equipment Under Test) .....       | 5         |
| 1.3 Block Diagram Showing the Configuration of System Tested..... | 6         |
| 1.4 Description of Support Units .....                            | 7         |
| 1.5 Description of Test Mode.....                                 | 7         |
| 1.6 Description of Test Software Setting .....                    | 8         |
| 1.7 Measurement Uncertainty .....                                 | 8         |
| 1.8 Test Facility.....  | 9         |
| <b>2. TEST SUMMARY .....</b>                                      | <b>10</b> |
| <b>3. TEST SOFTWARE.....</b>                                      | <b>10</b> |
| <b>4. TEST EQUIPMENT.....</b>                                     | <b>11</b> |
| <b>5. CONDUCTED EMISSION TEST .....</b>                           | <b>12</b> |
| 5.1 Test Standard and Limit.....                                  | 12        |
| 5.2 Test Setup.....   | 12        |
| 5.3 Test Procedure.....   | 13        |
| 5.4 Deviation From Test Standard.....                             | 13        |
| 5.5 EUT Operating Mode .....                                      | 13        |
| 5.6 Test Data.....  | 13        |
| <b>6. RADIATED EMISSION TEST .....</b>                            | <b>14</b> |
| 6.1 Test Standard and Limit.....                                  | 14        |
| 6.2 Test Setup.....   | 15        |
| 6.3 Test Procedure.....   | 16        |
| 6.4 Deviation From Test Standard.....                             | 17        |
| 6.5 EUT Operating Condition .....                                 | 17        |
| 6.6 Test Data.....  | 17        |
| <b>7. RESTRICTED BANDS AND BAND-EDGE TEST .....</b>               | <b>18</b> |
| 7.1 Test Standard and Limit.....                                  | 18        |
| 7.2 Test Setup.....   | 18        |
| 7.3 Test Procedure.....   | 19        |
| 7.4 Deviation From Test Standard.....                             | 19        |
| 7.5 EUT Operating Condition .....                                 | 19        |
| 7.6 Test Data.....  | 19        |
| <b>8. NUMBER OF HOPPING CHANNEL .....</b>                         | <b>20</b> |
| 8.1 Test Standard and Limit.....                                  | 20        |
| 8.2 Test Setup.....   | 20        |
| 8.3 Test Procedure.....   | 20        |
| 8.4 Deviation From Test Standard.....                             | 20        |
| 8.5 EUT Operating Condition .....                                 | 20        |

---

---

|   |           |
|---|-----------|
| 8.6 Test Data.....  | 20        |
| <b>9. AVERAGE TIME OF OCCUPANCY.....</b>                              | <b>21</b> |
| 9.1 Test Standard and Limit.....                                      | 21        |
| 9.2 Test Setup.....   | 21        |
| 9.3 Test Procedure.....   | 21        |
| 9.4 EUT Operating Condition .....                                     | 21        |
| 9.4 Deviation From Test Standard.....                                 | 21        |
| 9.5 Test Data.....  | 21        |
| <b>10. CHANNEL SEPARATION AND BANDWIDTH TEST.....</b>                 | <b>22</b> |
| 10.1 Test Standard and Limit .....                                    | 22        |
| 10.2 Test Setup.....  | 22        |
| 10.3 Test Procedure.....  | 22        |
| 10.4 Deviation From Test Standard.....                                | 22        |
| 10.5 EUT Operating Condition .....                                    | 22        |
| 10.6 Test Data.....   | 22        |
| <b>11. PEAK OUTPUT POWER TEST.....</b>                                | <b>23</b> |
| 11.1 Test Standard and Limit .....                                    | 23        |
| 11.2 Test Setup.....  | 23        |
| 11.3 Test Procedure.....  | 23        |
| 11.4 Deviation From Test Standard.....                                | 23        |
| 11.5 EUT Operating Condition .....                                    | 23        |
| 11.6 Test Data.....   | 23        |
| <b>12. ANTENNA REQUIREMENT.....</b>                                   | <b>24</b> |
| 12.1 Standard Requirement.....  | 24        |
| 12.2 Deviation From Test Standard.....                                | 24        |
| 12.3 Antenna Connected Construction.....                              | 24        |
| 12.4 Result.....  | 24        |
| <b>ATTACHMENT A-- CONDUCTED EMISSION TEST DATA .....</b>              | <b>25</b> |
| <b>ATTACHMENT B-- RADIATED EMISSION TEST DATA .....</b>               | <b>29</b> |
| <b>ATTACHMENT C-- RESTRICTED BANDS REQUIREMENT TEST DATA.....</b>     | <b>42</b> |
| <b>ATTACHMENT D-- NUMBER OF HOPPING CHANNEL TEST DATA.....</b>        | <b>48</b> |
| <b>ATTACHMENT E-- AVERAGE TIME OF OCCUPANCY TEST DATA.....</b>        | <b>49</b> |
| <b>ATTACHMENT F-- CHANNEL SEPARATION AND BANDWIDTH TEST DATA.....</b> | <b>51</b> |
| <b>BANDWIDTH TEST DATA: .....</b>                                     | <b>51</b> |
| <b>ATTACHMENT G-- PEAK OUTPUT POWER TEST DATA .....</b>               | <b>55</b> |

---

---

## Revision History

| Report No.   | Version | Description             | Issued Date |
|--------------|---------|-------------------------|-------------|
| TB-FCC170521 | Rev.01  | Initial issue of report | 2020-03-09  |
|              |         |                         |             |
|              |         |                         |             |
|              |         |                         |             |
|              |         |                         |             |
|              |         |                         |             |
|              |         |                         |             |
|              |         |                         |             |
|              |         |                         |             |

# 1. General Information about EUT

## 1.1 Client Information

|                     |   |   |
|---------------------|---|---|
| <b>Applicant</b>    | : | Shenzhen Videotimes Technology Co.,Ltd  |
| <b>Address</b>      | : | Room 601, Building B, Union Financial Building, No 1 Shihua Road, Fubao Street, Futian Free Trade Zone, Shenzhen, Guangdong, China. |
| <b>Manufacturer</b> | : | Shenzhen Videotimes Technology Co.,Ltd  |
| <b>Address</b>      | : | Room 601, Building B, Union Financial Building, No 1 Shihua Road, Fubao Street, Futian Free Trade Zone, Shenzhen, Guangdong, China. |

## 1.2 General Description of EUT (Equipment Under Test)

|                            |   |  |                                       |
|----------------------------|---|--|---------------------------------------|
| <b>EUT Name</b>            | : | 2.4GHz Digital Wireless Video Baby Monitor   |                                       |
| <b>Models No.</b>          | : | HB66RX   |                                       |
| <b>Model Difference</b>    | : | N/A  |                                       |
| <b>Product Description</b> | : | Operation Frequency:   | 2403.5MHz~2468MHz                     |
|                            | : | Number of Channel:   | 44 Channels <small>See Note 2</small> |
|                            | : | Max Peak Output Power:   | 19.10dBm                              |
|                            | : | Antenna Gain:  | 2dBi Monopole Antenna                 |
|                            | : | Modulation Type:   | GFSK (2Mbps)                          |
| <b>Power Supply</b>        | : | DC Voltage Supply from AC/DC Adapter<br>DC Voltage supplied by Li-ion battery  |                                       |
| <b>Power Rating</b>        | : | Adapter 1# (Model:K05S050100U)<br>Input: AC 100-240V~50/60Hz, 0.2A<br>Output: DC 5.0V,1.0A<br>Adapter 2# (Model:CS6E050100FU)<br>Input: AC 100-240V~50/60Hz, 0.2A<br>Output: DC 5.0V,1.0A<br>DC 3.7V by 950mAh Li-ion battery. |                                       |
| <b>Software Version</b>    | : | 1.0  |                                       |
| <b>Hardware Version</b>    | : | 1.0  |                                       |
| <b>Remark</b>              | : | The adapter and antenna gain provided by the applicant, the verified for the RF conduction test provided by TOBY test lab.   |                                       |

**Note:**

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

(2) Channel List:


| Channel List |                 |           |                 |           |                 |
|--------------|-----------------|-----------|-----------------|-----------|-----------------|
| Channel      | Frequency (MHz) | Channel   | Frequency (MHz) | Channel   | Frequency (MHz) |
| <b>00</b>    | <b>2403.5</b>   | 15        | 2426.0          | 30        | 2448.5          |
| 01           | 2405.0          | 16        | 2427.5          | 31        | 2450.0          |
| 02           | 2406.5          | 17        | 2429.0          | 32        | 2451.5          |
| 03           | 2408.0          | 18        | 2430.5          | 33        | 2453.0          |
| 04           | 2409.5          | 19        | 2432.0          | 34        | 2454.5          |
| 05           | 2411.0          | 20        | 2433.5          | 35        | 2456.0          |
| 06           | 2412.5          | 21        | 2435.0          | 36        | 2457.5          |
| 07           | 2414.0          | 22        | 2436.5          | 37        | 2459.0          |
| 08           | 2415.5          | 23        | 2438.0          | 38        | 2460.5          |
| 09           | 2417.0          | <b>24</b> | <b>2439.5</b>   | 39        | 2462.0          |
| 10           | 2418.5          | 25        | 2441.0          | 40        | 2463.5          |
| 11           | 2420.0          | 26        | 2442.5          | 41        | 2465.0          |
| 12           | 2421.5          | 27        | 2444.0          | 42        | 2466.5          |
| 13           | 2423.0          | 28        | 2445.5          | <b>43</b> | <b>2468.0</b>   |
| 14           | 2424.5          | 29        | 2447.0          |           |                 |

**Note: Test frequencies are lowest channel: 2403.5 MHz, middle channel: 2439.5 MHz and highest channel: 2468 MHz.**

(3) The Antenna information about the equipment is provided by the applicant.

1.3 Block Diagram Showing the Configuration of System Tested

**Adapter & TX Mode**

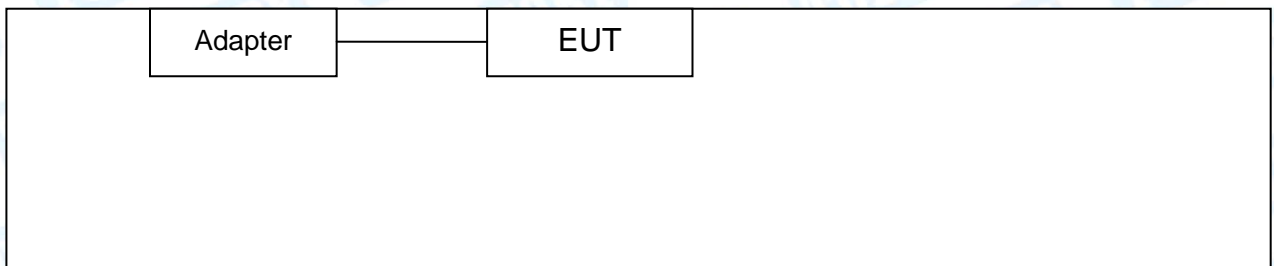

## 1.4 Description of Support Units

The EUT has been tested as an independent unit.

## 1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

| For Conducted Test |                  |
|--------------------|------------------|
| Final Test Mode    | Description      |
| Mode 1             | Adapter+ TX Mode |

| For Radiated Test |                                |
|-------------------|--------------------------------|
| Final Test Mode   | Description                    |
| Mode 1            | TX GFSK Mode                   |
| Mode 2            | TX Mode(GFSK) Channel 00/24/43 |

### Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate. We have pretested all the test modes above.  
According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:  
TX Mode: GFSK (2Mbps)
- (2) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis, X-plane, Y-plane and Z-plane. The worst case was found positioned on X-plane as the normal use. Therefore only the test data of this X-plane was used for radiated emission measurement test.

## 1.6 Description of Test Software Setting

During testing channel power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of Bluetooth mode.

|                              |            |            |          |
|------------------------------|------------|------------|----------|
| <b>Test Software Version</b> | N/A        |            |          |
| Frequency                    | 2403.5 MHz | 2439.5 MHz | 2468 MHz |
| GFSK                         | DEF        | DEF        | DEF      |

## 1.7 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| Test Item          | Parameters  | Expanded Uncertainty ( $U_{Lab}$ ) |
|--------------------|---|------------------------------------|
| Conducted Emission | Level Accuracy:<br>9kHz~150kHz<br>150kHz to 30MHz | $\pm 3.60$ dB<br>$\pm 3.10$ dB     |
| Radiated Emission  | Level Accuracy:<br>9kHz to 30 MHz                 | $\pm 4.60$ dB                      |
| Radiated Emission  | Level Accuracy:<br>30MHz to 1000 MHz              | $\pm 4.20$ dB                      |
| Radiated Emission  | Level Accuracy:<br>Above 1000MHz                  | $\pm 4.20$ dB                      |



## 1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

### **CNAS (L5813)**

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

### **A2LA Certificate No.: 4750.01**

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01. FCC Accredited Test Site Number: 854351.

### **IC Registration No.: (11950A-1)**

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

## 2. Test Summary

| FCC Part 15 Subpart C(15.247)/ RSS 247 Issue 2 |                             |  |          |        |
|--|-----------------------------|--|----------|--------|
| Standard Section                               |                             | Test Item                                  | Judgment | Remark |
| FCC  | IC                          |  |          |        |
| 15.203   |                             | Antenna Requirement                        | PASS     | N/A    |
| 15.207   | RSS-GEN<br>8.8              | Conducted Emission                         | PASS     | N/A    |
| 15.205   | RSS-Gen<br>8.10             | Restricted Bands                           | PASS     | N/A    |
| 15.247(a)(1)                                   | RSS 247<br>5.1 (b)          | Hopping Channel Separation                 | PASS     | N/A    |
| 15.247(a)(1)                                   | RSS 247<br>5.1 (d)          | Dwell Time                                 | PASS     | N/A    |
| 15.247(b)(1)                                   | RSS 247<br>5.4 (b)          | Peak Output Power                          | PASS     | N/A    |
| 15.247(b)(1)                                   | RSS 247<br>5.1 (d)          | Number of Hopping<br>Frequency             | PASS     | N/A    |
| 15.247(d)                                      | RSS 247<br>5.5              | Band Edge                                  | PASS     | N/A    |
| 15.247(c)&<br>15.209                           | RSS 247 5.5<br>&RSS-GEN 8.9 | Radiated Spurious Emission                 | PASS     | N/A    |
| 15.247(a)                                      | RSS 247<br>5.1 (a)          | 99% Occupied Bandwidth &<br>20dB Bandwidth | PASS     | N/A    |

**Note:** N/A is an abbreviation for Not Applicable.

## 3. Test Software

| Test Item                   | Test Software | Manufacturer | Version No. |
|-----------------------------|---------------|--------------|-------------|
| Conducted Emission          | EZ-EMC        | EZ           | CDI-03A2    |
| Radiation Emission          | EZ-EMC        | EZ           | FA-03A2RE   |
| RF Conducted<br>Measurement | MTS-8310      | MWRfTest     | V2.0.0.0    |

## 4. Test Equipment

| Conducted Emission Test    |                                  |                   |                           |               |               |
|----------------------------|----------------------------------|-------------------|---------------------------|---------------|---------------|
| Equipment                  | Manufacturer                     | Model No.         | Serial No.                | Last Cal.     | Cal. Due Date |
| EMI Test Receiver          | Rohde & Schwarz                  | ESCI              | 100321                    | Jul. 13, 2019 | Jul. 12, 2020 |
| RF Switching Unit          | Compliance Direction Systems Inc | RSU-A4            | 34403                     | Jul. 13, 2019 | Jul. 12, 2020 |
| AMN                        | SCHWARZBECK                      | NNBL 8226-2       | 8226-2/164                | Jul. 13, 2019 | Jul. 12, 2020 |
| LISN                       | Rohde & Schwarz                  | ENV216            | 101131                    | Jul. 13, 2019 | Jul. 12, 2020 |
| Radiation Emission Test    |                                  |                   |                           |               |               |
| Equipment                  | Manufacturer                     | Model No.         | Serial No.                | Last Cal.     | Cal. Due Date |
| Spectrum Analyzer          | Agilent                          | E4407B            | MY45106456                | Jul. 13, 2019 | Jul. 12, 2020 |
| EMI Test Receiver          | Rohde & Schwarz                  | ESPI              | 100010/007                | Jul. 13, 2019 | Jul. 12, 2020 |
| Spectrum Analyzer          | Rohde & Schwarz                  | FSVR              | 1311.006K40-10<br>0945-DH | Feb. 10, 2019 | Feb. 09, 2020 |
| Bilog Antenna              | ETS-LINDGREN                     | 3142E             | 00117537                  | Jan. 27, 2019 | Jan. 26, 2020 |
| Horn Antenna               | ETS-LINDGREN                     | 3117              | 00143207                  | Mar.03, 2019  | Mar. 02, 2020 |
| Horn Antenna               | ETS-LINDGREN                     | BBHA 9170         | BBHA9170582               | Mar.03, 2019  | Mar. 02, 2020 |
| Loop Antenna               | SCHWARZBECK                      | FMZB 1519 B       | 1519B-059                 | Jul. 13, 2019 | Jul. 12, 2020 |
| Pre-amplifier              | Sonoma                           | 310N              | 185903                    | Mar.04, 2019  | Mar. 03, 2020 |
| Pre-amplifier              | HP                               | 8449B             | 3008A00849                | Mar.03, 2019  | Mar. 02, 2020 |
| Pre-amplifier              | SKET                             | LNPA_1840G-50     | SK201904032               | Jul. 27, 2019 | Jul. 26, 2020 |
| Cable                      | HUBER+SUHNER                     | 100               | SUCOFLEX                  | Mar.03, 2019  | Mar. 02, 2020 |
| Positioning Controller     | ETS-LINDGREN                     | 2090              | N/A                       | N/A           | N/A           |
| Antenna Conducted Emission |                                  |                   |                           |               |               |
| Equipment                  | Manufacturer                     | Model No.         | Serial No.                | Last Cal.     | Cal. Due Date |
| Spectrum Analyzer          | Agilent                          | E4407B            | MY45106456                | Jul. 13, 2019 | Jul. 12, 2020 |
| Spectrum Analyzer          | Rohde & Schwarz                  | ESCI              | 100010/007                | Jul. 13, 2019 | Jul. 12, 2020 |
| MXA Signal Analyzer        | Agilent                          | N9020A            | MY49100060                | Sep. 16, 2019 | Sep. 15, 2020 |
| Vector Signal Generator    | Agilent                          | N5182A            | MY50141294                | Sep. 16, 2019 | Sep. 15, 2020 |
| Analog Signal Generator    | Agilent                          | N5181A            | MY50141953                | Sep. 16, 2019 | Sep. 15, 2020 |
| RF Power Sensor            | DARE!! Instruments               | RadiPowerRPR3006W | 17I00015SNO26             | Sep. 16, 2019 | Sep. 15, 2020 |
|                            | DARE!! Instruments               | RadiPowerRPR3006W | 17I00015SNO29             | Sep. 16, 2019 | Sep. 15, 2020 |
|                            | DARE!! Instruments               | RadiPowerRPR3006W | 17I00015SNO31             | Sep. 16, 2019 | Sep. 15, 2020 |
|                            | DARE!! Instruments               | RadiPowerRPR3006W | 17I00015SNO33             | Sep. 16, 2019 | Sep. 15, 2020 |

## 5. Conducted Emission Test

### 5.1 Test Standard and Limit

#### 5.1.1 Test Standard

FCC Part 15.207/RSS-GEN 8.8

#### 5.1.2 Test Limit

**Conducted Emission Test Limit**

| Frequency     | Maximum RF Line Voltage (dB $\mu$ V) |               |
|---------------|--------------------------------------|---------------|
|               | Quasi-peak Level                     | Average Level |
| 150kHz~500kHz | 66 ~ 56 *                            | 56 ~ 46 *     |
| 500kHz~5MHz   | 56                                   | 46            |
| 5MHz~30MHz    | 60                                   | 50            |


Notes:

(1) \*Decreasing linearly with logarithm of the frequency.

(2) The lower limit shall apply at the transition frequencies.

(3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 5.2 Test Setup

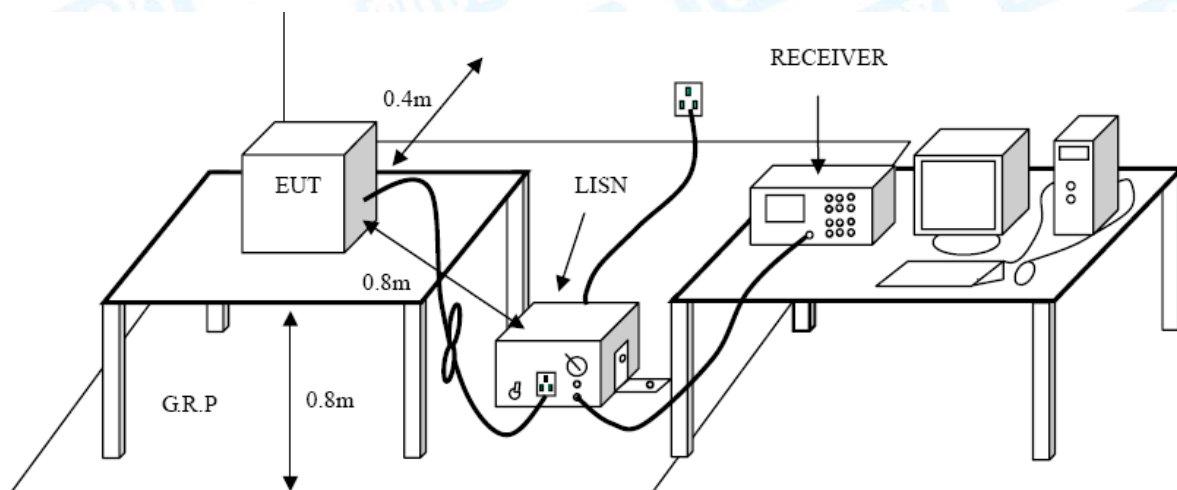

### 5.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

### 5.4 Deviation From Test Standard

No deviation

### 5.5 EUT Operating Mode

Please refer to the description of test mode.

### 5.6 Test Data

Please refer to the Attachment A.

## 6. Radiated Emission Test

### 6.1 Test Standard and Limit

#### 6.1.1 Test Standard

FCC Part 15.209/RSS-GEN 8.9

#### 6.1.2 Test Limit

#### Radiated Emission Limit (9 kHz~1000MHz)

| Frequency (MHz) | Field Strength (microvolt/meter) | Measurement Distance (meters) |
|-----------------|----------------------------------|-------------------------------|
| 0.009~0.490     | 2400/F(KHz)                      | 300                           |
| 0.490~1.705     | 24000/F(KHz)                     | 30                            |
| 1.705~30.0      | 30                               | 30                            |
| 30~88           | 100                              | 3                             |
| 88~216          | 150                              | 3                             |
| 216~960         | 200                              | 3                             |
| Above 960       | 500                              | 3                             |


#### Radiated Emission Limit (Above 1000MHz)

| Frequency (MHz) | Distance Meters(at 3m) |         |
|-----------------|------------------------|---------|
|                 | Peak                   | Average |
| Above 1000      | 74                     | 54      |


**Note:**

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m)


6.2 Test Setup

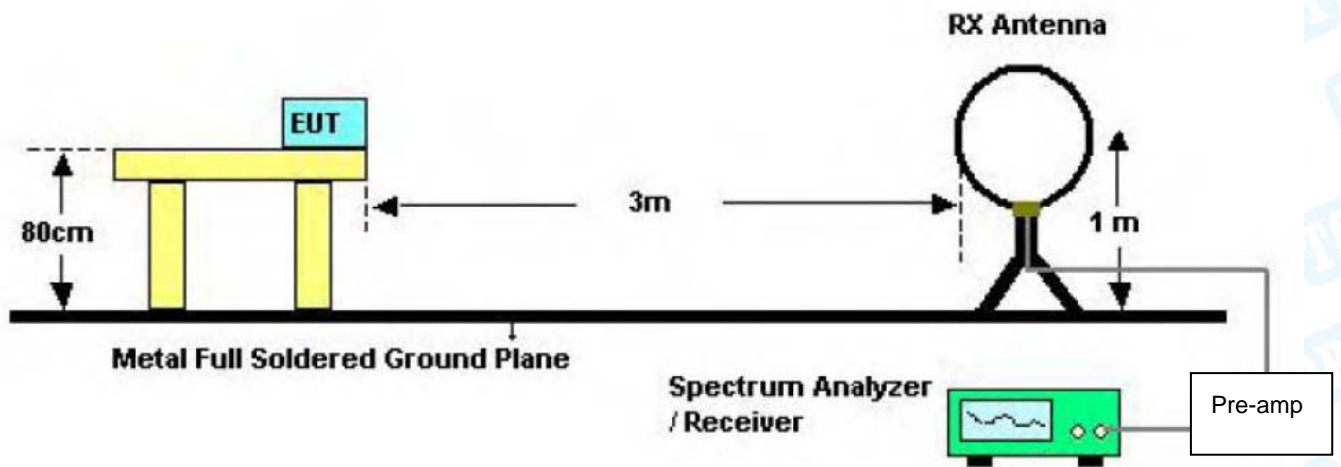

Below 30MHz Test Setup

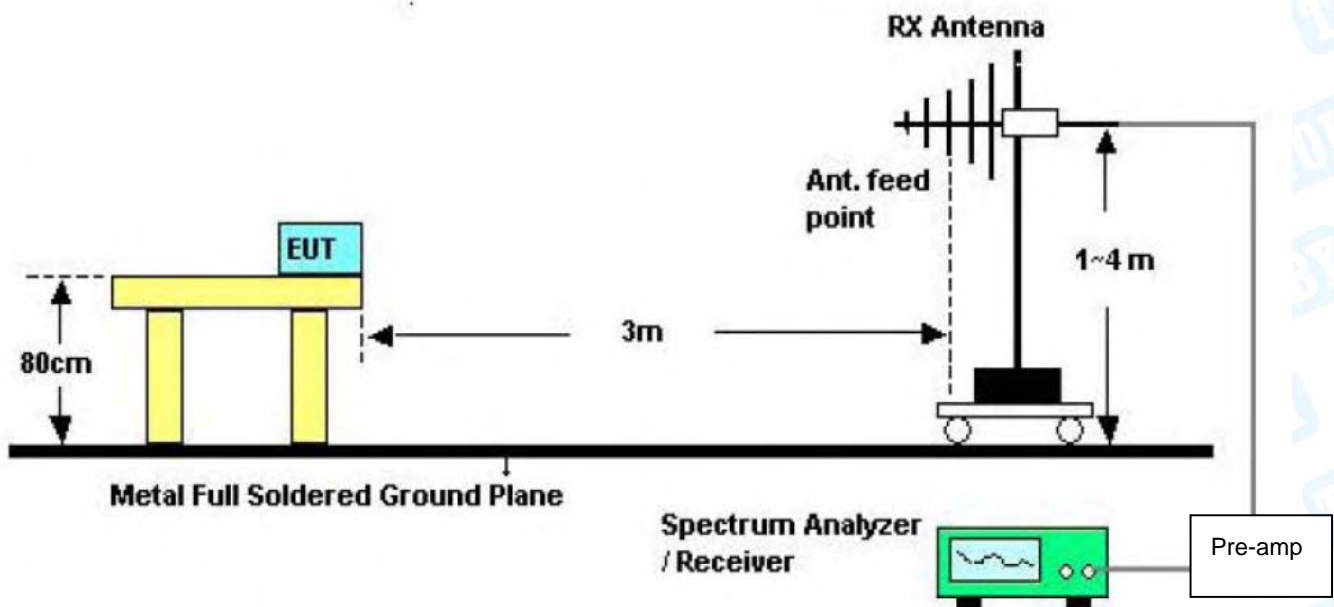

Below 1000MHz Test Setup

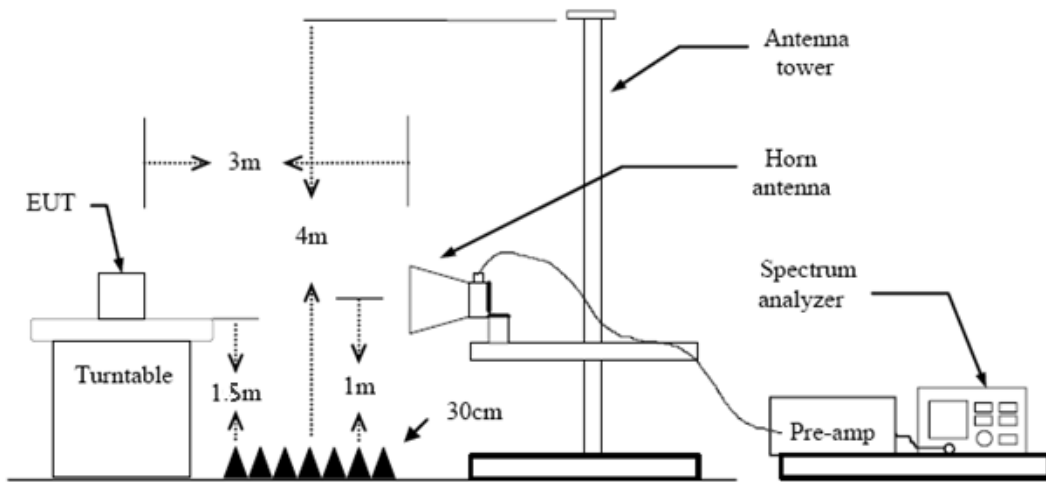

Above 1GHz Test Setup

### 6.3 Test Procedure

- (1) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency Below 1GHz. The EUT was placed on a rotating 0.8m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.



#### 6.4 Deviation From Test Standard

No deviation

#### 6.5 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

#### 6.6 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Please refer to the Attachment B.

## 7. Restricted Bands and Band-edge test

### 7.1 Test Standard and Limit

#### 7.1.1 Test Standard

FCC Part 15.209&15.205


RSS-GEN 8.9&8.10

#### 7.1.2 Test Limit

| Restricted Frequency Band (MHz) | Distance Meters(at 3m) |         |
|---------------------------------|------------------------|---------|
|                                 | Peak                   | Average |
| 2310 ~2390                      | 74                     | 54      |
| 2483.5 ~2500                    | 74                     | 54      |

**Note: All restriction bands have been tested, only the worst case is reported.**

### 7.2 Test Setup

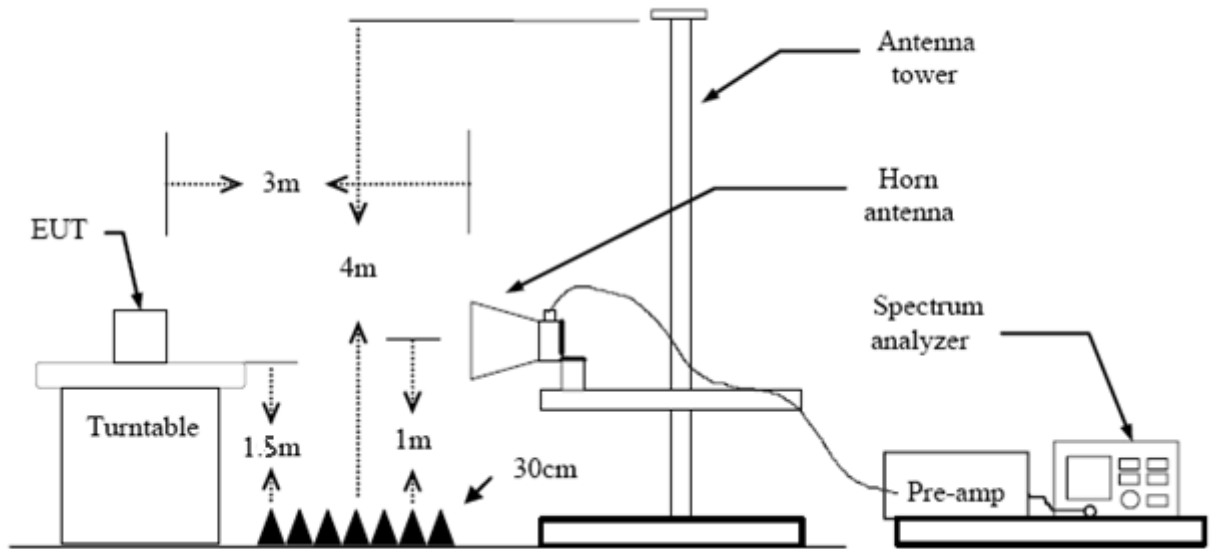

---

### 7.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with AVG Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

### 7.4 Deviation From Test Standard

No deviation

### 7.5 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

### 7.6 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

All restriction bands have been tested, only the worst case is reported.

Please refer to the Attachment C.

## 8. Number of Hopping Channel

### 8.1 Test Standard and Limit


#### 8.1.1 Test Standard

FCC Part 15.247 (a)(1)

#### 8.1.2 Test Limit

| Section | Test Item                 | Limit |
|---------|---------------------------|-------|
| 15.247  | Number of Hopping Channel | >15   |

### 8.2 Test Setup



### 8.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100 KHz, VBW=100 KHz, Sweep time= Auto.

### 8.4 Deviation From Test Standard

No deviation

### 8.5 EUT Operating Condition

The EUT was set to the Hopping Mode by the Customer.

### 8.6 Test Data

Please refer to the Attachment D.

## 9. Average Time of Occupancy

### 9.1 Test Standard and Limit


#### 9.1.1 Test Standard

FCC Part 15.247 (a)(1) / RSS 247 5.1(d)

#### 9.1.2 Test Limit

| Test Item                 | Limit   |
|---------------------------|---------|
| Average Time of Occupancy | 0.4 sec |

### 9.2 Test Setup



### 9.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100KHz, VBW=300KHz.
- (3) Use video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for packet transmitting.
- (8) Measure the maximum time duration of one single pulse.

### 9.4 EUT Operating Condition

The average time of occupancy on any channel within the Period can be calculated with formulas:

The Dwell Time = Burst Width \* Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation:  $0.4 [s] * \text{hopping number} = 0.4 [s] * 20 [ch] = 8.0 [s*ch]$ ;

The burst width, which is directly measured, refers to the duration on one channel hop.

The maximum number of hopping channels in 8.0s  $= 3 * (8.0 / 0.24) = 100$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

The EUT was set to the Hopping Mode by the Customer.

### 9.4 Deviation From Test Standard

No deviation

### 9.5 Test Data

Please refer to the Attachment E.

## 10. Channel Separation and Bandwidth Test

### 10.1 Test Standard and Limit


#### 10.1.1 Test Standard

FCC Part 15.247/RSS 247 5.1(b)

#### 10.1.2 Test Limit

| Test Item          | Limit   | Frequency Range(MHz) |
|--------------------|---|----------------------|
| Bandwidth          | $\leq 1$ MHz<br>(20dB bandwidth)  | 2400~2483.5          |
| Channel Separation | $>25$ KHz or $>$ two-thirds of<br>the 20 dB bandwidth<br>Which is greater | 2400~2483.5          |

### 10.2 Test Setup



### 10.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:  
Channel Separation: RBW=100 kHz, VBW=100 kHz.  
Bandwidth: RBW=30 kHz, VBW=100 kHz.
- (3) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.
- (4) Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:30 kHz, and Video Bandwidth:100 kHz. Sweep Time set auto.

### 10.4 Deviation From Test Standard

No deviation

### 10.5 EUT Operating Condition

The EUT was set to the Hopping Mode for Channel Separation Test and continuously transmitting for the Bandwidth Test.

### 10.6 Test Data

Please refer to the Attachment F.

## 11. Peak Output Power Test

### 11.1 Test Standard and Limit


#### 11.1.1 Test Standard

FCC Part 15.247 (b) (1)/RSS 247 5.4(b)

#### 11.1.2 Test Limit

| Test Item         | Limit  | Frequency Range(MHz) |
|-------------------|--|----------------------|
| Peak Output Power | Hopping Channels>75<br>Power<1W(30dBm)<br>Other <125 mW(21dBm) | 2400~2483.5          |

### 11.2 Test Setup



### 11.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:  
 Peak Detector: RBW=1 MHz, VBW=3 MHz for bandwidth less than 1MHz.  
 RBW=3 MHz, VBW=3 MHz for bandwidth more than 1MHz.

### 11.4 Deviation From Test Standard

No deviation

### 11.5 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.

### 11.6 Test Data

Please refer to the Attachment G.

---

---

## 12. Antenna Requirement

### 12.1 Standard Requirement

#### 12.1.1 Standard

FCC Part 15.203

#### 12.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 12.2 Deviation From Test Standard

No deviation

### 12.3 Antenna Connected Construction

The gains of the antenna used for transmitting is 2dBi, and the antenna connector is de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

### 12.4 Result


The EUT antenna is a Monopole Antenna. It complies with the standard requirement.

| Antenna Type   |
|--|
| <input checked="" type="checkbox"/> Permanent attached antenna |
| <input type="checkbox"/> Unique connector antenna              |
| <input type="checkbox"/> Professional installation antenna     |



## Attachment A-- Conducted Emission Test Data


|                      |  |                           |     |
|----------------------|--|---------------------------|-----|
| <b>Temperature:</b>  | 25°C   | <b>Relative Humidity:</b> | 55% |
| <b>Test Voltage:</b> | AC 120V/60Hz   |                           |     |
| <b>Terminal:</b>     | Line   |                           |     |
| <b>Test Mode:</b>    | Adapter(K05S050100G) + TX GFSK Mode 2403.5MHz                    |                           |     |
| <b>Remark:</b>       | All channels have been tested and Shows only the worst channels. |                           |     |

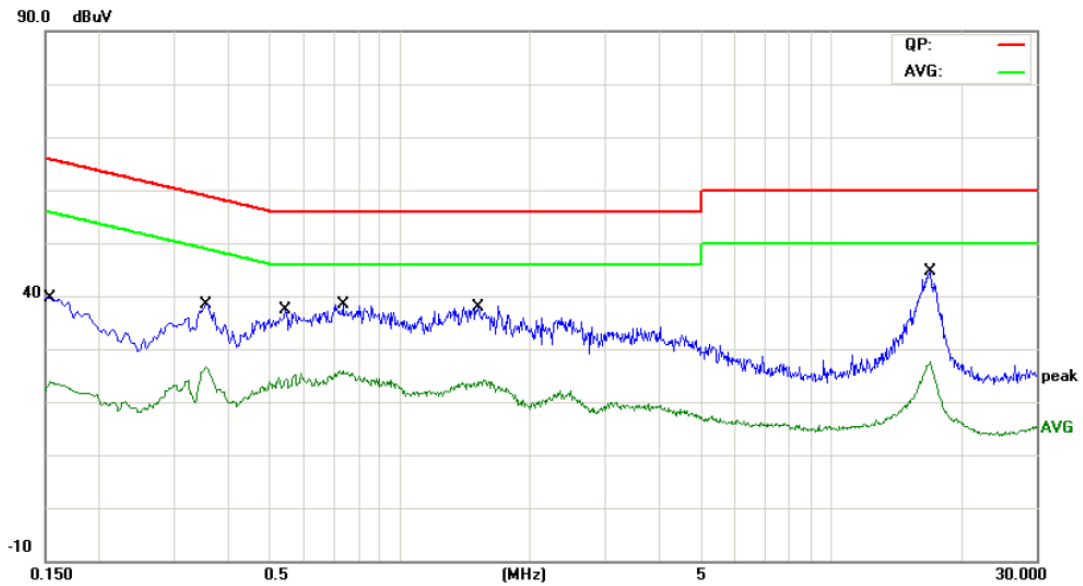

| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit | Over   |          |
|-----|-----|---------|---------------|----------------|-------------|-------|--------|----------|
|     |     | MHz     | dBuV          | dB             | dBuV        | dBuV  | dB     | Detector |
| 1   |     | 0.1539  | 24.98         | 9.76           | 34.74       | 65.78 | -31.04 | QP       |
| 2   |     | 0.1539  | 11.94         | 9.76           | 21.70       | 55.78 | -34.08 | AVG      |
| 3   |     | 0.3540  | 24.44         | 9.83           | 34.27       | 58.87 | -24.60 | QP       |
| 4   |     | 0.3540  | 15.78         | 9.83           | 25.61       | 48.87 | -23.26 | AVG      |
| 5   |     | 0.5420  | 21.75         | 9.95           | 31.70       | 56.00 | -24.30 | QP       |
| 6   |     | 0.5420  | 13.88         | 9.95           | 23.83       | 46.00 | -22.17 | AVG      |
| 7   |     | 0.7380  | 23.39         | 9.78           | 33.17       | 56.00 | -22.83 | QP       |
| 8   | *   | 0.7380  | 15.18         | 9.78           | 24.96       | 46.00 | -21.04 | AVG      |
| 9   |     | 1.5140  | 21.52         | 9.85           | 31.37       | 56.00 | -24.63 | QP       |
| 10  |     | 1.5140  | 12.89         | 9.85           | 22.74       | 46.00 | -23.26 | AVG      |
| 11  |     | 17.0860 | 24.68         | 9.84           | 34.52       | 60.00 | -25.48 | QP       |
| 12  |     | 17.0860 | 16.15         | 9.84           | 25.99       | 50.00 | -24.01 | AVG      |

Emission Level= Read Level+ Correct Factor


|                      |  |                           |     |
|----------------------|--|---------------------------|-----|
| <b>Temperature:</b>  | 25°C   | <b>Relative Humidity:</b> | 55% |
| <b>Test Voltage:</b> | AC 120V/60Hz   |                           |     |
| <b>Terminal:</b>     | Neutral  |                           |     |
| <b>Test Mode:</b>    | Adapter(K05S050100G) + TX GFSK Mode 2403.5MHz                    |                           |     |
| <b>Remark:</b>       | All channels have been tested and Shows only the worst channels. |                           |     |

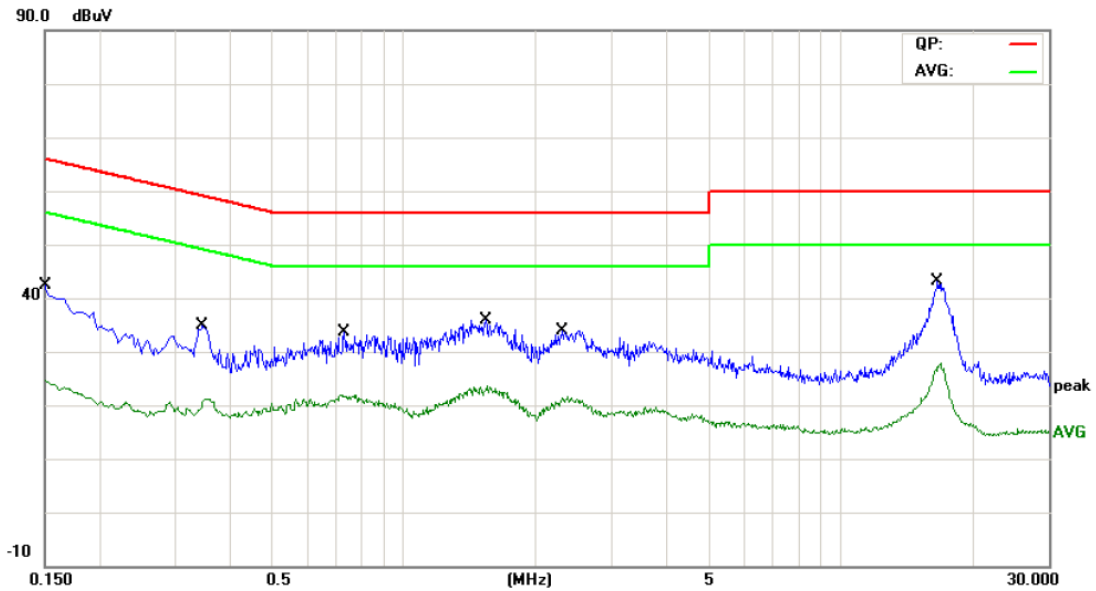

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   |     | 0.1500       | 26.12                    | 9.60                    | 35.72                    | 65.99         | -30.27     | QP       |
| 2   |     | 0.1500       | 12.17                    | 9.60                    | 21.77                    | 55.99         | -34.22     | AVG      |
| 3   |     | 0.3460       | 19.90                    | 9.73                    | 29.63                    | 59.06         | -29.43     | QP       |
| 4   |     | 0.3460       | 10.82                    | 9.73                    | 20.55                    | 49.06         | -28.51     | AVG      |
| 5   |     | 0.7300       | 16.24                    | 9.75                    | 25.99                    | 56.00         | -30.01     | QP       |
| 6   |     | 0.7300       | 11.36                    | 9.75                    | 21.11                    | 46.00         | -24.89     | AVG      |
| 7   |     | 1.5420       | 20.00                    | 9.82                    | 29.82                    | 56.00         | -26.18     | QP       |
| 8   | *   | 1.5420       | 12.43                    | 9.82                    | 22.25                    | 46.00         | -23.75     | AVG      |
| 9   |     | 2.3060       | 18.46                    | 9.85                    | 28.31                    | 56.00         | -27.69     | QP       |
| 10  |     | 2.3060       | 10.53                    | 9.85                    | 20.38                    | 46.00         | -25.62     | AVG      |
| 11  |     | 16.7020      | 25.81                    | 9.78                    | 35.59                    | 60.00         | -24.41     | QP       |
| 12  |     | 16.7020      | 16.46                    | 9.78                    | 26.24                    | 50.00         | -23.76     | AVG      |

Emission Level= Read Level+ Correct Factor


|                      |  |                           |     |
|----------------------|--|---------------------------|-----|
| <b>Temperature:</b>  | 25°C   | <b>Relative Humidity:</b> | 55% |
| <b>Test Voltage:</b> | AC 120V/60Hz   |                           |     |
| <b>Terminal:</b>     | Line   |                           |     |
| <b>Test Mode:</b>    | Adapter(CS6E050100FU) + TX GFSK Mode 2403.5MHz                   |                           |     |
| <b>Remark:</b>       | All channels have been tested and Shows only the worst channels. |                           |     |

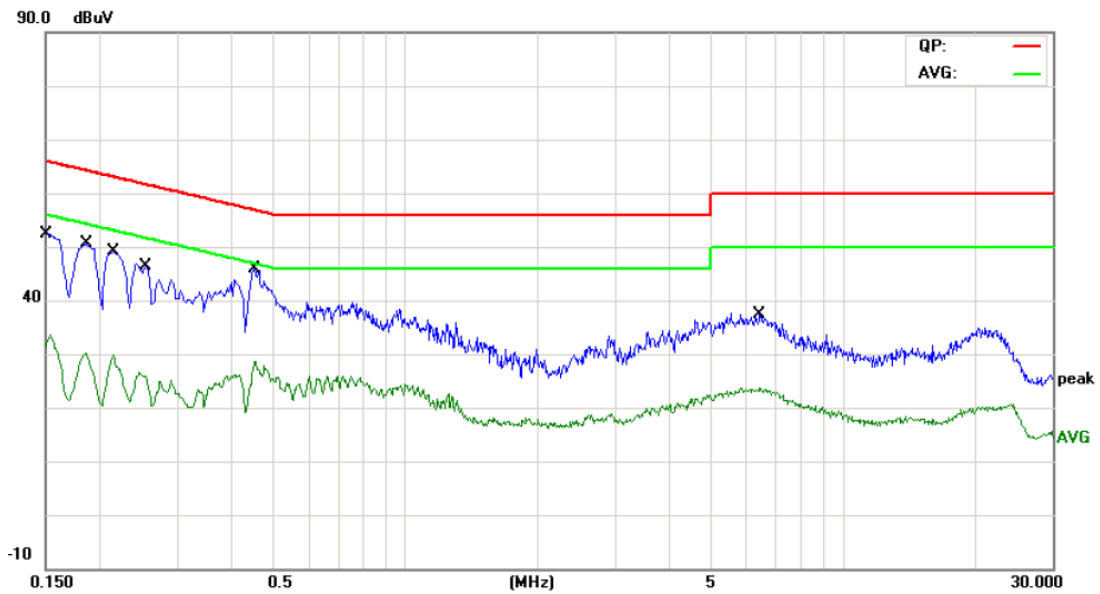

| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit | Over   | Detector |
|-----|-----|--------|---------------|----------------|-------------|-------|--------|----------|
|     |     | MHz    | dBuV          | dB             | dBuV        | dBuV  | dB     |          |
| 1   |     | 0.1500 | 38.72         | 9.75           | 48.47       | 65.99 | -17.52 | QP       |
| 2   |     | 0.1500 | 20.15         | 9.75           | 29.90       | 55.99 | -26.09 | AVG      |
| 3   |     | 0.1860 | 35.99         | 9.78           | 45.77       | 64.21 | -18.44 | QP       |
| 4   |     | 0.1860 | 17.95         | 9.78           | 27.73       | 54.21 | -26.48 | AVG      |
| 5   |     | 0.2140 | 35.07         | 9.79           | 44.86       | 63.04 | -18.18 | QP       |
| 6   |     | 0.2140 | 16.08         | 9.79           | 25.87       | 53.04 | -27.17 | AVG      |
| 7   |     | 0.2540 | 31.03         | 9.80           | 40.83       | 61.62 | -20.79 | QP       |
| 8   |     | 0.2540 | 12.65         | 9.80           | 22.45       | 51.62 | -29.17 | AVG      |
| 9   | *   | 0.4500 | 31.63         | 9.89           | 41.52       | 56.87 | -15.35 | QP       |
| 10  |     | 0.4500 | 17.89         | 9.89           | 27.78       | 46.87 | -19.09 | AVG      |
| 11  |     | 6.4460 | 21.10         | 9.83           | 30.93       | 60.00 | -29.07 | QP       |
| 12  |     | 6.4460 | 12.75         | 9.83           | 22.58       | 50.00 | -27.42 | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |  |                           |     |
|----------------------|--|---------------------------|-----|
| <b>Temperature:</b>  | 25°C   | <b>Relative Humidity:</b> | 55% |
| <b>Test Voltage:</b> | AC 120V/60Hz   |                           |     |
| <b>Terminal:</b>     | Neutral  |                           |     |
| <b>Test Mode:</b>    | Adapter(CS6E050100FU) + TX GFSK Mode 2403.5MHz                   |                           |     |
| <b>Remark:</b>       | All channels have been tested and Shows only the worst channels. |                           |     |

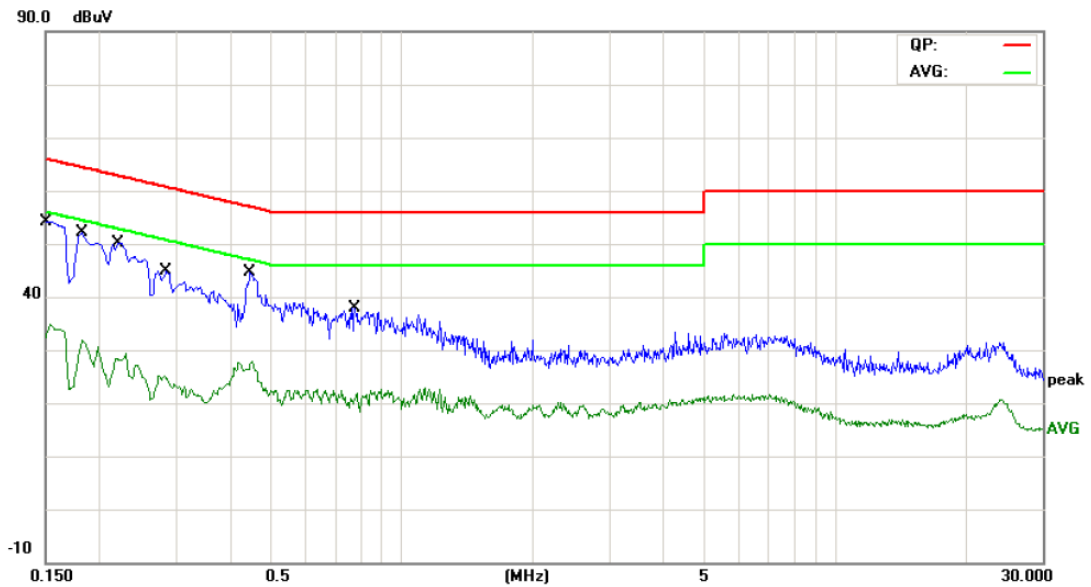

| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit | Over   | Detector |
|-----|-----|--------|---------------|----------------|-------------|-------|--------|----------|
|     |     | MHz    | dBuV          | dB             | dBuV        | dBuV  | dB     |          |
| 1   | *   | 0.1500 | 40.30         | 9.60           | 49.90       | 65.99 | -16.09 | QP       |
| 2   |     | 0.1500 | 21.92         | 9.60           | 31.52       | 55.99 | -24.47 | AVG      |
| 3   |     | 0.1819 | 38.56         | 9.60           | 48.16       | 64.39 | -16.23 | QP       |
| 4   |     | 0.1819 | 20.16         | 9.60           | 29.76       | 54.39 | -24.63 | AVG      |
| 5   |     | 0.2220 | 34.93         | 9.62           | 44.55       | 62.74 | -18.19 | QP       |
| 6   |     | 0.2220 | 15.36         | 9.62           | 24.98       | 52.74 | -27.76 | AVG      |
| 7   |     | 0.2860 | 28.72         | 9.70           | 38.42       | 60.64 | -22.22 | QP       |
| 8   |     | 0.2860 | 12.67         | 9.70           | 22.37       | 50.64 | -28.27 | AVG      |
| 9   |     | 0.4460 | 30.34         | 9.77           | 40.11       | 56.95 | -16.84 | QP       |
| 10  |     | 0.4460 | 17.37         | 9.77           | 27.14       | 46.95 | -19.81 | AVG      |
| 11  |     | 0.7780 | 22.75         | 9.76           | 32.51       | 56.00 | -23.49 | QP       |
| 12  |     | 0.7780 | 10.45         | 9.76           | 20.21       | 46.00 | -25.79 | AVG      |

Emission Level= Read Level+ Correct Factor

## Attachment B-- Radiated Emission Test Data


### 9KHz~30MHz

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

### 30MHz~1GHz

|                      |   |                           |     |
|----------------------|---|---------------------------|-----|
| <b>Temperature:</b>  | 25°C  | <b>Relative Humidity:</b> | 55% |
| <b>Test Voltage:</b> | AC 120V/60Hz                                  |                           |     |
| <b>Ant. Pol.</b>     | Horizontal                                    |                           |     |
| <b>Test Mode:</b>    | Adapter(K05S050100G) + TX GFSK Mode 2403.5MHz |                           |     |
| <b>Remark:</b>       | Only worse case is reported                   |                           |     |

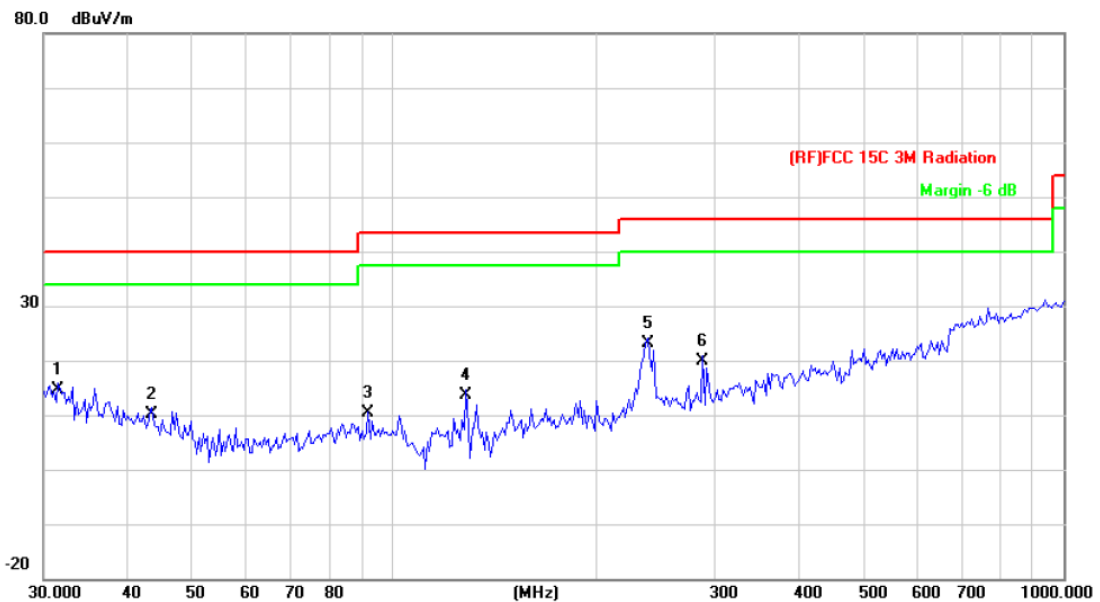


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 31.5095      | 28.78                    | -14.15                    | 14.63                      | 40.00           | -25.37     | QP       |
| 2   |     | 43.5057      | 31.16                    | -20.92                    | 10.24                      | 40.00           | -29.76     | QP       |
| 3   |     | 91.4949      | 32.46                    | -22.03                    | 10.43                      | 43.50           | -33.07     | QP       |
| 4   |     | 128.1130     | 36.16                    | -22.42                    | 13.74                      | 43.50           | -29.76     | QP       |
| 5   | *   | 239.1473     | 40.70                    | -17.66                    | 23.04                      | 46.00           | -22.96     | QP       |
| 6   |     | 289.0021     | 36.19                    | -16.23                    | 19.96                      | 46.00           | -26.04     | QP       |

\*:Maximum data    x:Over limit    !:over margin

**Emission Level= Read Level+ Correct Factor**

|                      |   |                           |     |
|----------------------|---|---------------------------|-----|
| <b>Temperature:</b>  | 25°C  | <b>Relative Humidity:</b> | 55% |
| <b>Test Voltage:</b> | AC 120V/60Hz                                  |                           |     |
| <b>Ant. Pol.</b>     | Vertical                                      |                           |     |
| <b>Test Mode:</b>    | Adapter(K05S050100G) + TX GFSK Mode 2403.5MHz |                           |     |
| <b>Remark:</b>       | Only worse case is reported                   |                           |     |

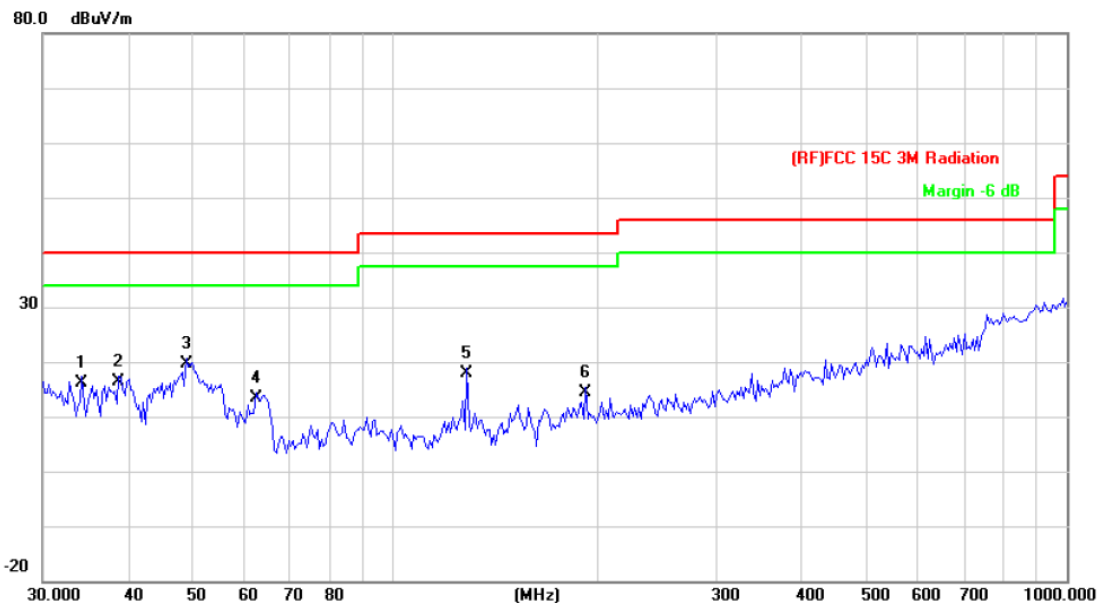


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 34.2760      | 32.49                    | -16.24                    | 16.25                      | 40.00           | -23.75     | QP       |
| 2   |     | 38.8878      | 35.06                    | -18.64                    | 16.42                      | 40.00           | -23.58     | QP       |
| 3   | *   | 49.0145      | 42.72                    | -23.02                    | 19.70                      | 40.00           | -20.30     | QP       |
| 4   |     | 62.2128      | 37.65                    | -24.25                    | 13.40                      | 40.00           | -26.60     | QP       |
| 5   |     | 128.1130     | 40.35                    | -22.42                    | 17.93                      | 43.50           | -25.57     | QP       |
| 6   |     | 192.4186     | 34.09                    | -19.80                    | 14.29                      | 43.50           | -29.21     | QP       |

\*:Maximum data    x:Over limit    !:over margin

**Emission Level= Read Level+ Correct Factor**

|                      |  |                           |     |
|----------------------|--|---------------------------|-----|
| <b>Temperature:</b>  | 25°C   | <b>Relative Humidity:</b> | 55% |
| <b>Test Voltage:</b> | AC 120V/60Hz                                   |                           |     |
| <b>Ant. Pol.</b>     | Horizontal                                     |                           |     |
| <b>Test Mode:</b>    | Adapter(CS6E050100FU) + TX GFSK Mode 2403.5MHz |                           |     |
| <b>Remark:</b>       | Only worse case is reported                    |                           |     |

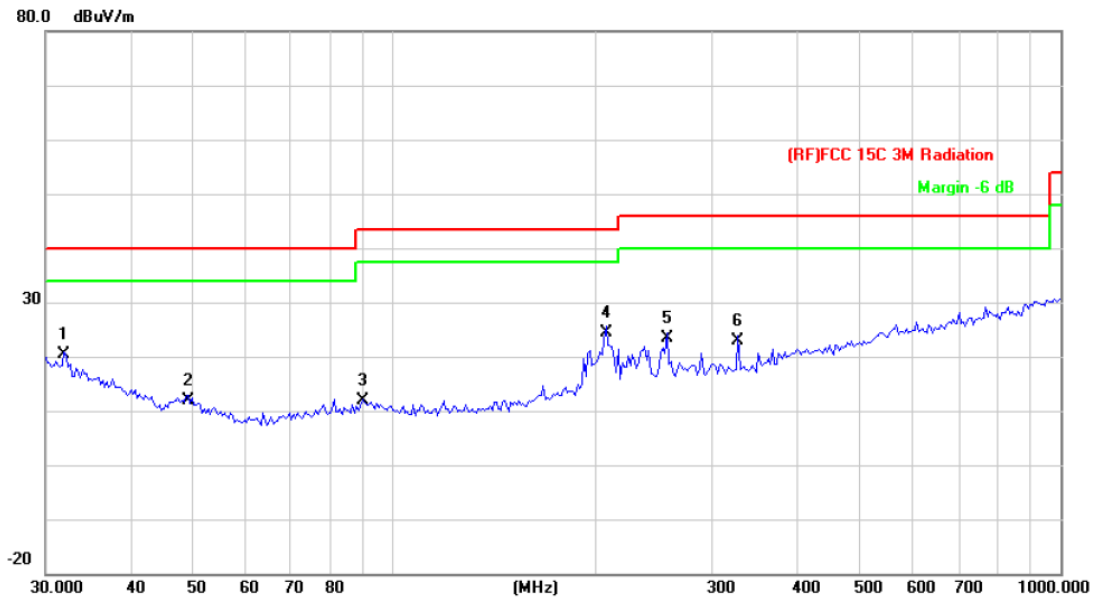


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 31.9546      | 34.91                    | -14.48                    | 20.43                      | 40.00           | -19.57     | QP       |
| 2   |     | 49.0145      | 34.96                    | -23.02                    | 11.94                      | 40.00           | -28.06     | QP       |
| 3   |     | 89.5899      | 33.81                    | -22.03                    | 11.78                      | 43.50           | -31.72     | QP       |
| 4   | *   | 207.8501     | 43.95                    | -19.45                    | 24.50                      | 43.50           | -19.00     | QP       |
| 5   |     | 256.5211     | 40.29                    | -16.92                    | 23.37                      | 46.00           | -22.63     | QP       |
| 6   |     | 327.8873     | 38.05                    | -15.10                    | 22.95                      | 46.00           | -23.05     | QP       |

\*:Maximum data    x:Over limit    !:over margin

**Emission Level= Read Level+ Correct Factor**

|                      |  |                           |     |
|----------------------|--|---------------------------|-----|
| <b>Temperature:</b>  | 25°C   | <b>Relative Humidity:</b> | 55% |
| <b>Test Voltage:</b> | AC 120V/60Hz                                   |                           |     |
| <b>Ant. Pol.</b>     | Vertical                                       |                           |     |
| <b>Test Mode:</b>    | Adapter(CS6E050100FU) + TX GFSK Mode 2403.5MHz |                           |     |
| <b>Remark:</b>       | Only worse case is reported                    |                           |     |

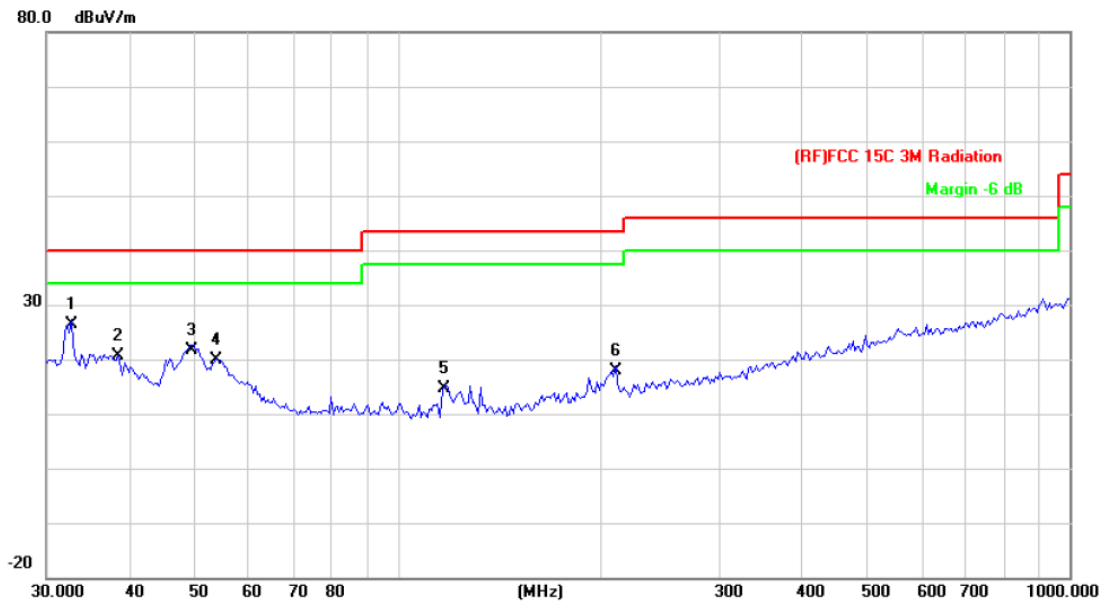

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   | *   | 32.6340      | 41.36                    | -14.99                    | 26.37                      | 40.00           | -13.63     | QP       |
| 2   |     | 38.3462      | 38.97                    | -18.38                    | 20.59                      | 40.00           | -19.41     | QP       |
| 3   |     | 49.3594      | 44.76                    | -23.13                    | 21.63                      | 40.00           | -18.37     | QP       |
| 4   |     | 53.6932      | 43.64                    | -23.75                    | 19.89                      | 40.00           | -20.11     | QP       |
| 5   |     | 116.9495     | 37.04                    | -22.36                    | 14.68                      | 43.50           | -28.82     | QP       |
| 6   |     | 210.7860     | 37.12                    | -19.28                    | 17.84                      | 43.50           | -25.66     | QP       |

\*:Maximum data    x:Over limit    !:over margin

**Emission Level= Read Level+ Correct Factor**



**Above 1GHz (Only worse case is reported)**

|                      |  |                           |     |
|----------------------|--|---------------------------|-----|
| <b>Temperature:</b>  | 25°C   | <b>Relative Humidity:</b> | 55% |
| <b>Test Voltage:</b> | AC 120V/60Hz   |                           |     |
| <b>Ant. Pol.</b>     | Horizontal   |                           |     |
| <b>Test Mode:</b>    | TX GFSK Mode 2403.5MHz   |                           |     |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |     |

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Detector |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     |          |
| 1   |     | 4803.100 | 46.22         | 15.56          | 61.78       | 74.00  | -12.22 | peak     |
| 2   | *   | 4810.100 | 31.44         | 15.58          | 47.02       | 54.00  | -6.98  | AVG      |

**Emission Level= Read Level+ Correct Factor**

| <b>Temperature:</b>   | 25°C   | <b>Relative Humidity:</b> | 55%           |                |             |        |               |                |             |       |      |  |  |  |     |      |      |        |        |    |          |   |  |          |       |       |       |       |        |      |   |   |          |       |       |       |       |       |     |
|---|--|---------------------------|---------------|----------------|-------------|--------|---------------|----------------|-------------|-------|------|--|--|--|-----|------|------|--------|--------|----|----------|---|--|----------|-------|-------|-------|-------|--------|------|---|---|----------|-------|-------|-------|-------|-------|-----|
| <b>Test Voltage:</b>  | AC 120V/60Hz   |                           |               |                |             |        |               |                |             |       |      |  |  |  |     |      |      |        |        |    |          |   |  |          |       |       |       |       |        |      |   |   |          |       |       |       |       |       |     |
| <b>Ant. Pol.</b>  | Vertical   |                           |               |                |             |        |               |                |             |       |      |  |  |  |     |      |      |        |        |    |          |   |  |          |       |       |       |       |        |      |   |   |          |       |       |       |       |       |     |
| <b>Test Mode:</b>   | TX GFSK Mode 2403.5MHz   |                           |               |                |             |        |               |                |             |       |      |  |  |  |     |      |      |        |        |    |          |   |  |          |       |       |       |       |        |      |   |   |          |       |       |       |       |       |     |
| <b>Remark:</b>  | No report for the emission which more than 10 dB below the prescribed limit. |                           |               |                |             |        |               |                |             |       |      |  |  |  |     |      |      |        |        |    |          |   |  |          |       |       |       |       |        |      |   |   |          |       |       |       |       |       |     |
| <table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>4808.660</td> <td>45.58</td> <td>15.59</td> <td>61.17</td> <td>74.00</td> <td>-12.83</td> <td>peak</td> </tr> <tr> <td>2</td> <td>*</td> <td>4810.940</td> <td>31.48</td> <td>15.60</td> <td>47.08</td> <td>54.00</td> <td>-6.92</td> <td>AVG</td> </tr> </tbody> </table> |  |                           |               | No.            | Mk.         | Freq.  | Reading Level | Correct Factor | Measurement | Limit | Over |  |  |  | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | Detector | 1 |  | 4808.660 | 45.58 | 15.59 | 61.17 | 74.00 | -12.83 | peak | 2 | * | 4810.940 | 31.48 | 15.60 | 47.08 | 54.00 | -6.92 | AVG |
| No.   | Mk.  | Freq.                     | Reading Level | Correct Factor | Measurement | Limit  | Over          |                |             |       |      |  |  |  |     |      |      |        |        |    |          |   |  |          |       |       |       |       |        |      |   |   |          |       |       |       |       |       |     |
|   |  | MHz                       | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB            | Detector       |             |       |      |  |  |  |     |      |      |        |        |    |          |   |  |          |       |       |       |       |        |      |   |   |          |       |       |       |       |       |     |
| 1   |  | 4808.660                  | 45.58         | 15.59          | 61.17       | 74.00  | -12.83        | peak           |             |       |      |  |  |  |     |      |      |        |        |    |          |   |  |          |       |       |       |       |        |      |   |   |          |       |       |       |       |       |     |
| 2   | *  | 4810.940                  | 31.48         | 15.60          | 47.08       | 54.00  | -6.92         | AVG            |             |       |      |  |  |  |     |      |      |        |        |    |          |   |  |          |       |       |       |       |        |      |   |   |          |       |       |       |       |       |     |
| <b>Emission Level= Read Level+ Correct Factor</b>   |  |                           |               |                |             |        |               |                |             |       |      |  |  |  |     |      |      |        |        |    |          |   |  |          |       |       |       |       |        |      |   |   |          |       |       |       |       |       |     |

|                      |  |                           |     |
|----------------------|--|---------------------------|-----|
| <b>Temperature:</b>  | 25°C   | <b>Relative Humidity:</b> | 55% |
| <b>Test Voltage:</b> | AC 120V/60Hz   |                           |     |
| <b>Ant. Pol.</b>     | Horizontal   |                           |     |
| <b>Test Mode:</b>    | TX GFSK Mode 2439.5MHz   |                           |     |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |     |

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   |     | 4876.440 | 46.14         | 15.89          | 62.03       | 74.00  | -11.97 | peak     |
| 2   | *   | 4879.860 | 32.34         | 15.90          | 48.24       | 54.00  | -5.76  | AVG      |

**Emission Level= Read Level+ Correct Factor**

|                      |  |                           |     |
|----------------------|--|---------------------------|-----|
| <b>Temperature:</b>  | 25°C   | <b>Relative Humidity:</b> | 55% |
| <b>Test Voltage:</b> | AC 120V/60Hz   |                           |     |
| <b>Ant. Pol.</b>     | Vertical   |                           |     |
| <b>Test Mode:</b>    | TX GFSK Mode 2439.5MHz   |                           |     |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |     |

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Detector |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     |          |
| 1   |     | 4874.840 | 45.47         | 15.88          | 61.35       | 74.00  | -12.65 | peak     |
| 2   | *   | 4878.960 | 32.19         | 15.90          | 48.09       | 54.00  | -5.91  | AVG      |

**Emission Level= Read Level+ Correct Factor**

|                      |  |                           |     |
|----------------------|--|---------------------------|-----|
| <b>Temperature:</b>  | 25°C   | <b>Relative Humidity:</b> | 55% |
| <b>Test Voltage:</b> | AC 120V/60Hz   |                           |     |
| <b>Ant. Pol.</b>     | Horizontal   |                           |     |
| <b>Test Mode:</b>    | TX GFSK Mode 2468MHz   |                           |     |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |     |

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Detector |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     |          |
| 1   | *   | 4932.280 | 33.02         | 16.15          | 49.17       | 54.00  | -4.83  | AVG      |
| 2   |     | 4935.200 | 45.62         | 16.15          | 61.77       | 74.00  | -12.23 | peak     |

**Emission Level= Read Level+ Correct Factor**



| <b>Temperature:</b>   | 25°C   | <b>Relative Humidity:</b> | 55%           |                |             |        |               |                |             |       |      |  |  |  |     |      |      |        |        |    |          |   |   |          |       |       |       |       |       |     |   |  |          |       |       |       |       |        |      |
|---|--|---------------------------|---------------|----------------|-------------|--------|---------------|----------------|-------------|-------|------|--|--|--|-----|------|------|--------|--------|----|----------|---|---|----------|-------|-------|-------|-------|-------|-----|---|--|----------|-------|-------|-------|-------|--------|------|
| <b>Test Voltage:</b>  | AC 120V/60Hz   |                           |               |                |             |        |               |                |             |       |      |  |  |  |     |      |      |        |        |    |          |   |   |          |       |       |       |       |       |     |   |  |          |       |       |       |       |        |      |
| <b>Ant. Pol.</b>  | Vertical   |                           |               |                |             |        |               |                |             |       |      |  |  |  |     |      |      |        |        |    |          |   |   |          |       |       |       |       |       |     |   |  |          |       |       |       |       |        |      |
| <b>Test Mode:</b>   | TX GFSK Mode 2468MHz   |                           |               |                |             |        |               |                |             |       |      |  |  |  |     |      |      |        |        |    |          |   |   |          |       |       |       |       |       |     |   |  |          |       |       |       |       |        |      |
| <b>Remark:</b>  | No report for the emission which more than 10 dB below the prescribed limit. |                           |               |                |             |        |               |                |             |       |      |  |  |  |     |      |      |        |        |    |          |   |   |          |       |       |       |       |       |     |   |  |          |       |       |       |       |        |      |
| <table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>*</td> <td>4934.740</td> <td>32.93</td> <td>16.15</td> <td>49.08</td> <td>54.00</td> <td>-4.92</td> <td>AVG</td> </tr> <tr> <td>2</td> <td></td> <td>4935.560</td> <td>44.99</td> <td>16.15</td> <td>61.14</td> <td>74.00</td> <td>-12.86</td> <td>peak</td> </tr> </tbody> </table> |  |                           |               | No.            | Mk.         | Freq.  | Reading Level | Correct Factor | Measurement | Limit | Over |  |  |  | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | Detector | 1 | * | 4934.740 | 32.93 | 16.15 | 49.08 | 54.00 | -4.92 | AVG | 2 |  | 4935.560 | 44.99 | 16.15 | 61.14 | 74.00 | -12.86 | peak |
| No.   | Mk.  | Freq.                     | Reading Level | Correct Factor | Measurement | Limit  | Over          |                |             |       |      |  |  |  |     |      |      |        |        |    |          |   |   |          |       |       |       |       |       |     |   |  |          |       |       |       |       |        |      |
|   |  | MHz                       | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB            | Detector       |             |       |      |  |  |  |     |      |      |        |        |    |          |   |   |          |       |       |       |       |       |     |   |  |          |       |       |       |       |        |      |
| 1   | *  | 4934.740                  | 32.93         | 16.15          | 49.08       | 54.00  | -4.92         | AVG            |             |       |      |  |  |  |     |      |      |        |        |    |          |   |   |          |       |       |       |       |       |     |   |  |          |       |       |       |       |        |      |
| 2   |  | 4935.560                  | 44.99         | 16.15          | 61.14       | 74.00  | -12.86        | peak           |             |       |      |  |  |  |     |      |      |        |        |    |          |   |   |          |       |       |       |       |       |     |   |  |          |       |       |       |       |        |      |
| <b>Emission Level= Read Level+ Correct Factor</b>   |  |                           |               |                |             |        |               |                |             |       |      |  |  |  |     |      |      |        |        |    |          |   |   |          |       |       |       |       |       |     |   |  |          |       |       |       |       |        |      |

**Conducted Emission Test Data**

|                      |   |                           |     |
|----------------------|---|---------------------------|-----|
| <b>Temperature:</b>  | 25 °C                                       | <b>Relative Humidity:</b> | 55% |
| <b>Test Voltage:</b> | AC 120V/60Hz                                |                           |     |
| <b>Test Mode:</b>    | TX GFSK Mode                                |                           |     |
| <b>Remark:</b>       | This report only shall the worst case mode. |                           |     |



**2403.5 MHz**

**0.03GHz-26.5GHz**

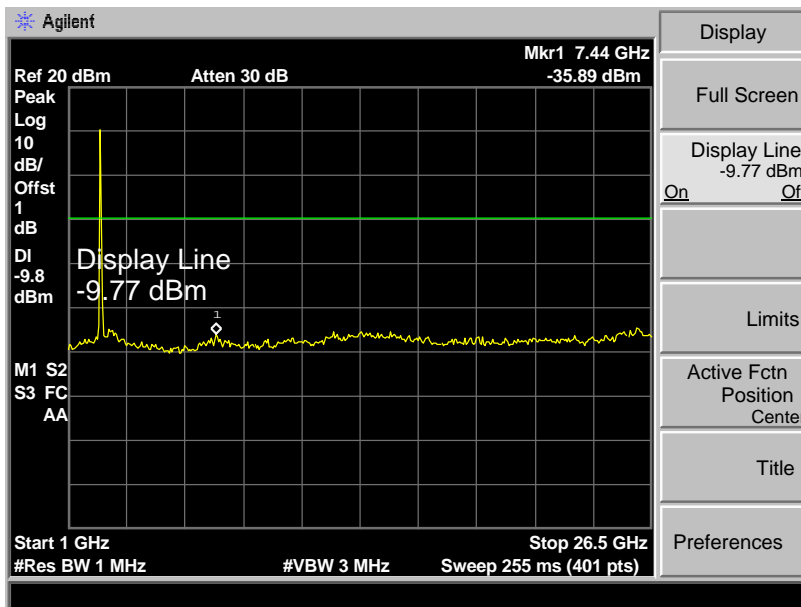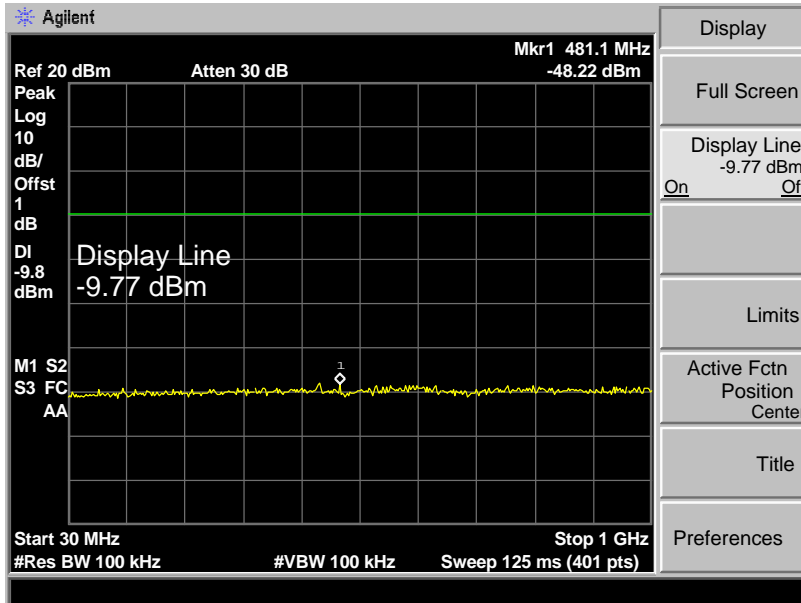

2439.5 MHz

0.03GHz-26.5GHz

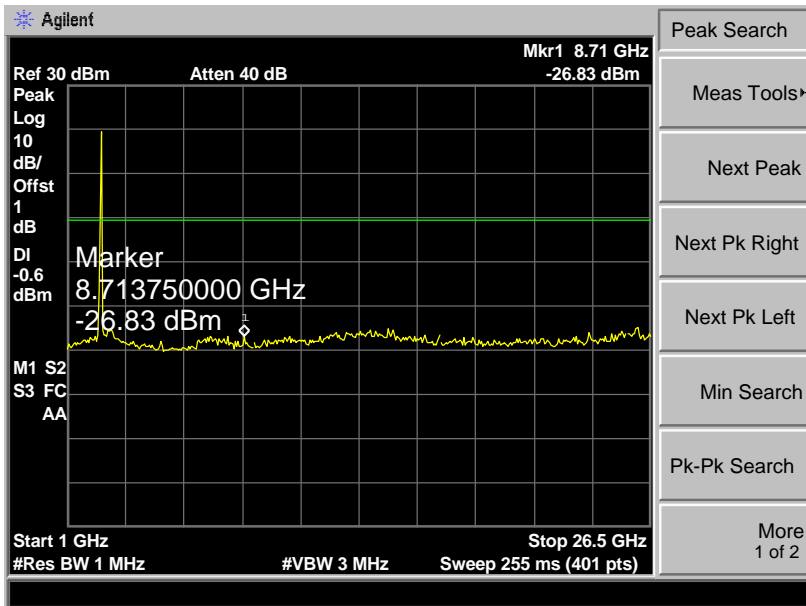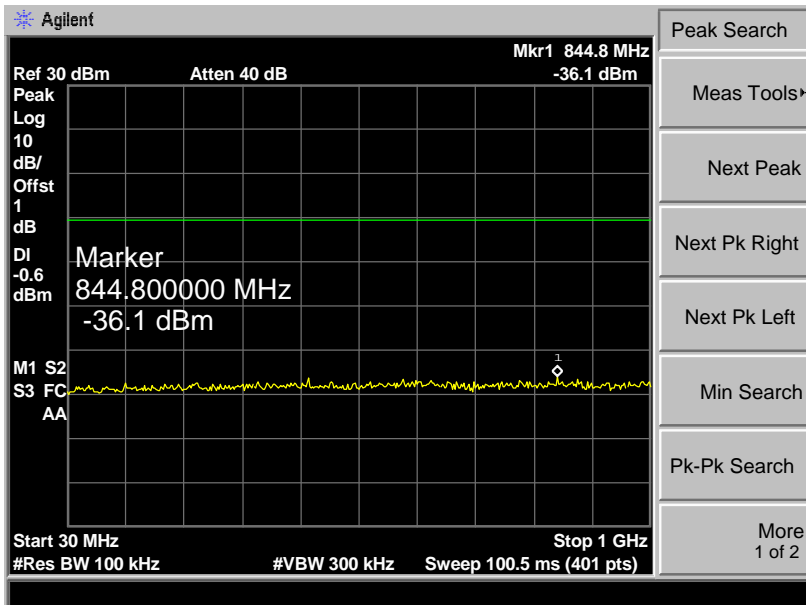






## Attachment C-- Restricted Bands Requirement Test Data

### (1) Radiation Test


|               |                             |                    |     |
|---------------|-----------------------------|--------------------|-----|
| Temperature:  | 25°C                        | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                |                    |     |
| Ant. Pol.     | Horizontal                  |                    |     |
| Test Mode:    | TX GFSK Mode 2403.5MHz      |                    |     |
| Remark:       | Only worse case is reported |                    |     |

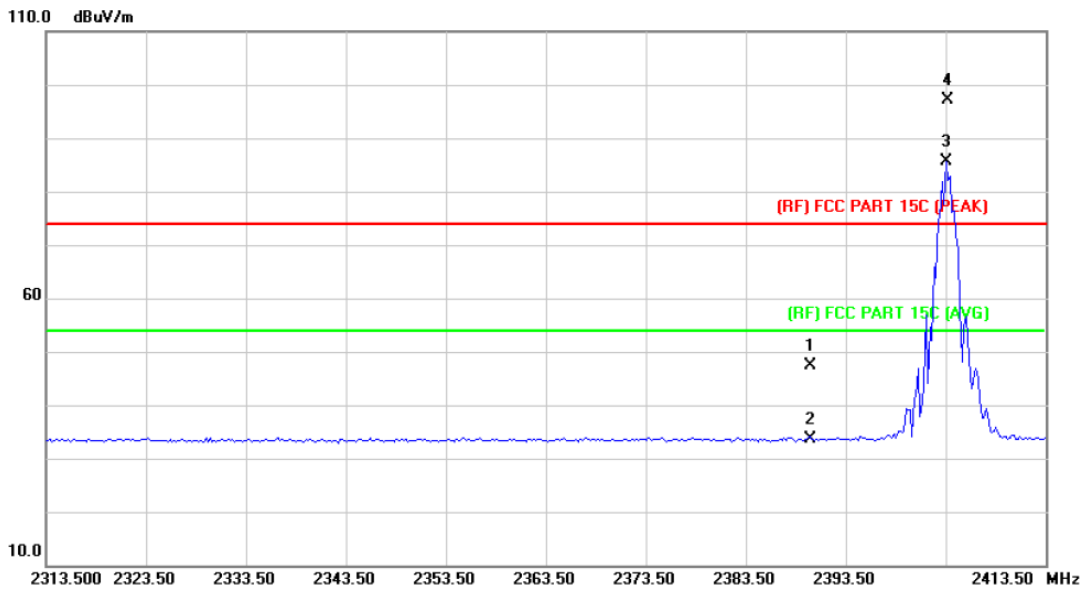

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   |     | 2390.000     | 44.47                    | 2.91                      | 47.38                      | 74.00                 | -26.62     | peak     |
| 2   |     | 2390.000     | 30.78                    | 2.91                      | 33.69                      | 54.00                 | -20.31     | AVG      |
| 3   | *   | 2403.500     | 82.76                    | 2.96                      | 85.72                      | Fundamental Frequency |            | AVG      |
| 4   | X   | 2403.700     | 94.20                    | 2.96                      | 97.16                      | Fundamental Frequency |            | peak     |

Emission Level= Read Level+ Correct Factor


|                      |                             |                           |     |
|----------------------|-----------------------------|---------------------------|-----|
| <b>Temperature:</b>  | 25°C                        | <b>Relative Humidity:</b> | 55% |
| <b>Test Voltage:</b> | AC 120V/60Hz                |                           |     |
| <b>Ant. Pol.</b>     | Vertical                    |                           |     |
| <b>Test Mode:</b>    | TX GFSK Mode 2403.5MHz      |                           |     |
| <b>Remark:</b>       | Only worse case is reported |                           |     |

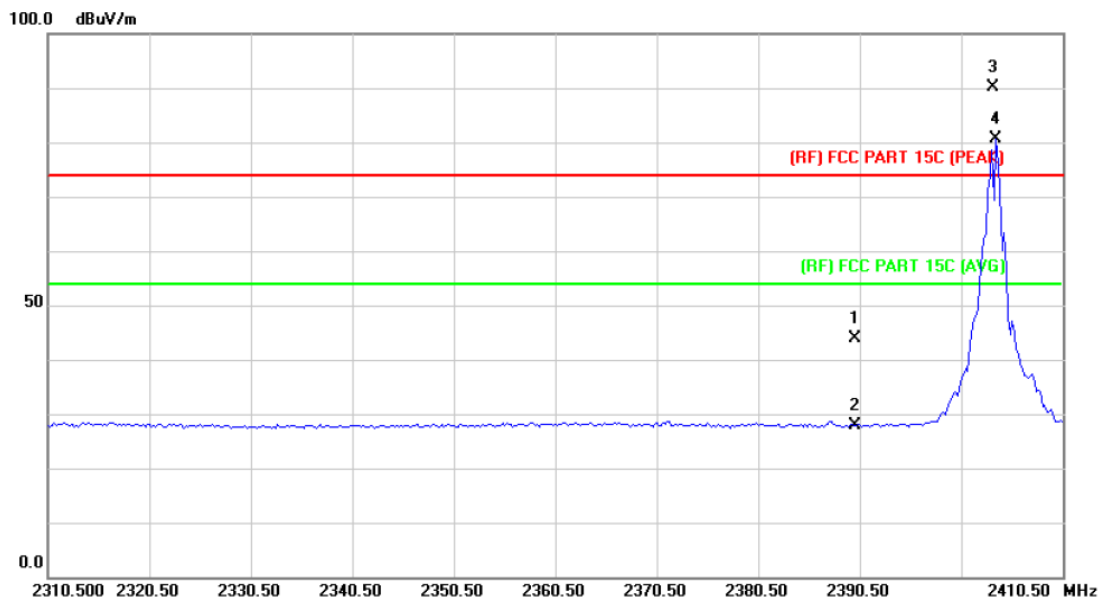

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector                      |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|-------------------------------|
| 1   |     | 2390.000     | 40.93                    | 2.91                      | 43.84                      | 74.00           | -30.16     | peak                          |
| 2   |     | 2390.000     | 24.93                    | 2.91                      | 27.84                      | 54.00           | -26.16     | AVG                           |
| 3   | X   | 2403.700     | 87.10                    | 2.96                      | 90.06                      |                 |            | Fundamental Frequency<br>peak |
| 4   | *   | 2403.900     | 77.74                    | 2.96                      | 80.70                      |                 |            | Fundamental Frequency<br>AVG  |

Emission Level= Read Level+ Correct Factor


|                      |                             |                           |     |
|----------------------|-----------------------------|---------------------------|-----|
| <b>Temperature:</b>  | 25°C                        | <b>Relative Humidity:</b> | 55% |
| <b>Test Voltage:</b> | AC 120V/60Hz                |                           |     |
| <b>Ant. Pol.</b>     | Horizontal                  |                           |     |
| <b>Test Mode:</b>    | TX GFSK Mode 2468 MHz       |                           |     |
| <b>Remark:</b>       | Only worse case is reported |                           |     |

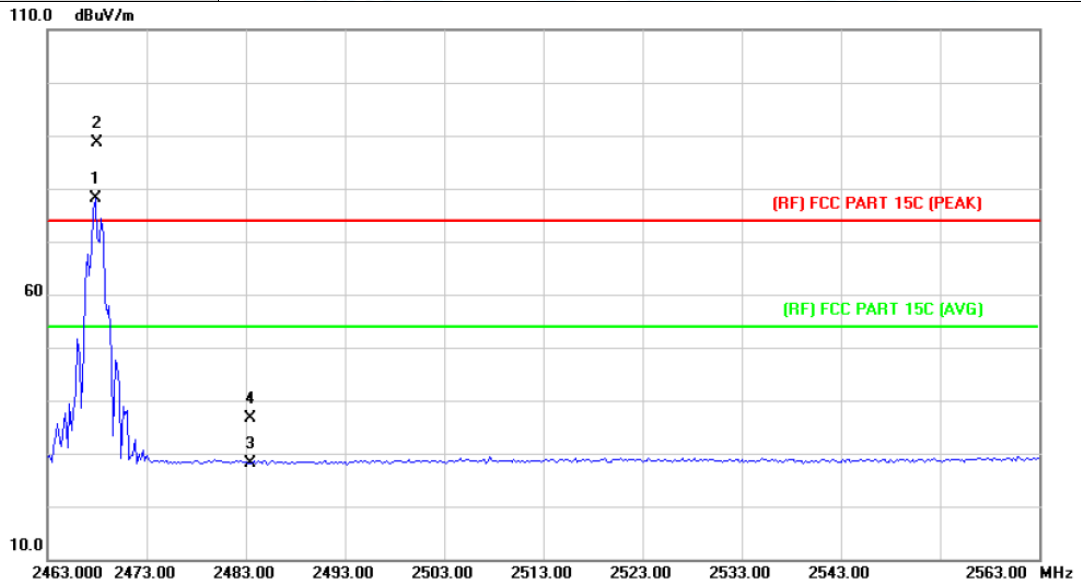

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   | X   | 2467.800     | 74.81                    | 3.32                      | 78.13                      | Fundamental Frequency |            | AVG      |
| 2   | *   | 2468.000     | 85.32                    | 3.32                      | 88.64                      | Fundamental Frequency |            | peak     |
| 3   |     | 2483.500     | 24.83                    | 3.40                      | 28.23                      | 54.00                 | -25.77     | AVG      |
| 4   |     | 2483.500     | 33.24                    | 3.40                      | 36.64                      | 74.00                 | -37.36     | peak     |

Emission Level= Read Level+ Correct Factor

|                      |                             |                           |     |
|----------------------|-----------------------------|---------------------------|-----|
| <b>Temperature:</b>  | 25°C                        | <b>Relative Humidity:</b> | 55% |
| <b>Test Voltage:</b> | AC 120V/60Hz                |                           |     |
| <b>Ant. Pol.</b>     | Vertical                    |                           |     |
| <b>Test Mode:</b>    | TX GFSK Mode 2468 MHz       |                           |     |
| <b>Remark:</b>       | Only worse case is reported |                           |     |


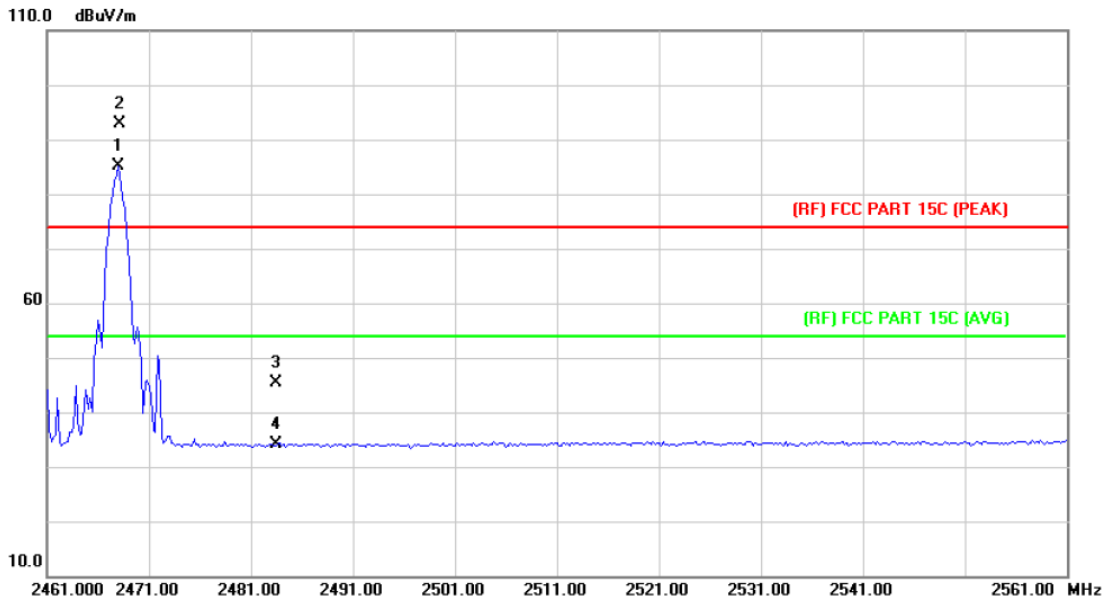


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   | *   | 2468.000     | 81.83                    | 3.32                      | 85.15                      | Fundamental Frequency |            | AVG      |
| 2   | X   | 2468.200     | 89.59                    | 3.32                      | 92.91                      | Fundamental Frequency |            | peak     |
| 3   |     | 2483.500     | 41.95                    | 3.40                      | 45.35                      | 74.00                 | -28.65     | peak     |
| 4   |     | 2483.500     | 30.66                    | 3.40                      | 34.06                      | 54.00                 | -19.94     | AVG      |



Emission Level= Read Level+ Correct Factor

**(2) Conducted Band Edge Test**

|                      |                                 |                           |     |
|----------------------|---------------------------------|---------------------------|-----|
| <b>Temperature:</b>  | 25°C                            | <b>Relative Humidity:</b> | 55% |
| <b>Test Voltage:</b> | AC 120V/60Hz                    |                           |     |
| <b>Test Mode:</b>    | TX GFSK Mode 2403.5MHz/2468 MHz |                           |     |
| <b>Remark:</b>       | Only worse case is reported     |                           |     |

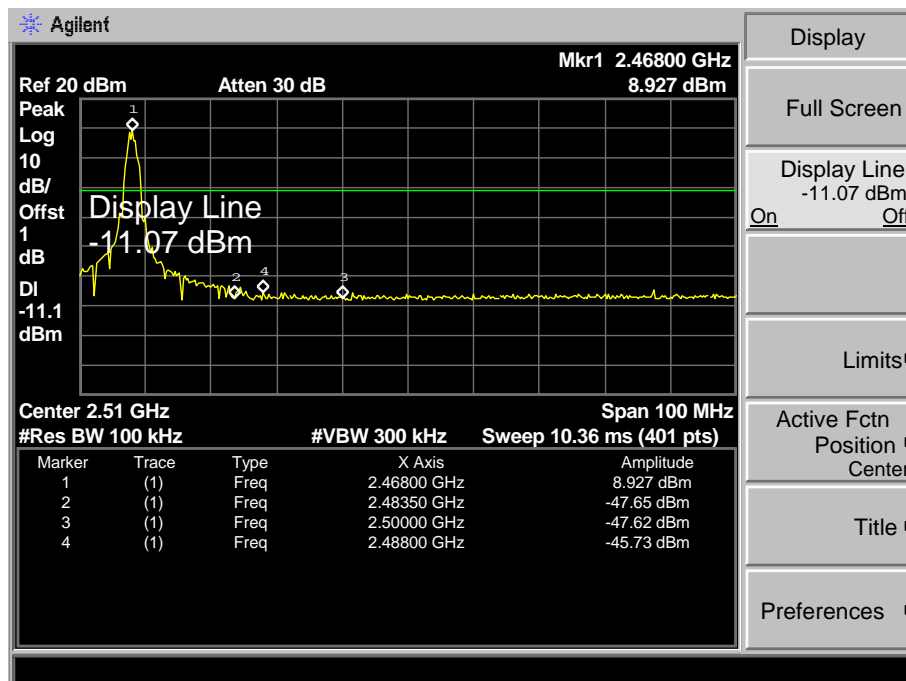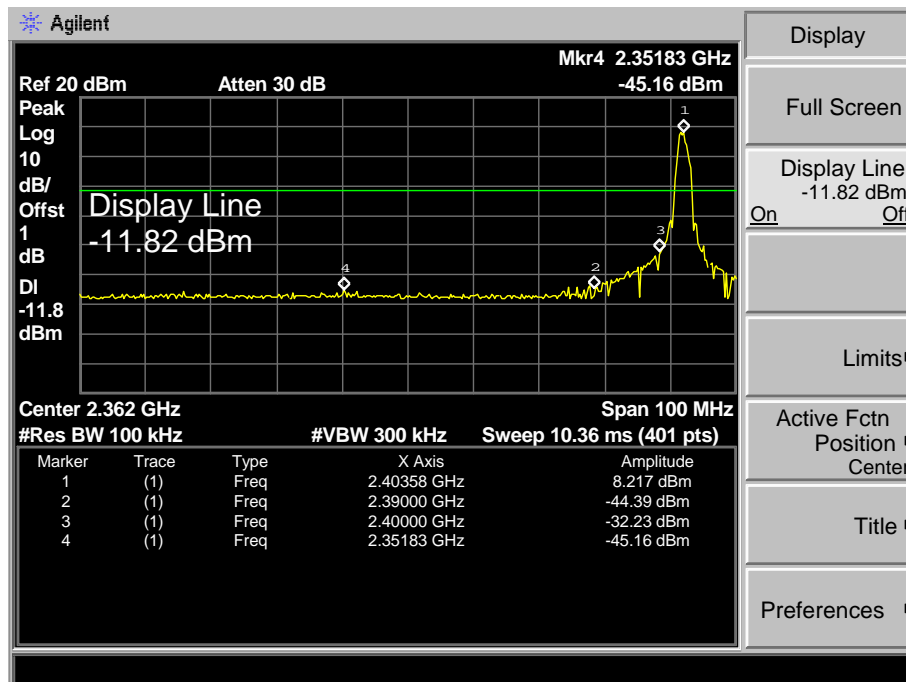


|               |                             |                    |     |
|---------------|-----------------------------|--------------------|-----|
| Temperature:  | 25°C                        | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                |                    |     |
| Test Mode:    | GFSK Hopping Mode           |                    |     |
| Remark:       | Only worse case is reported |                    |     |

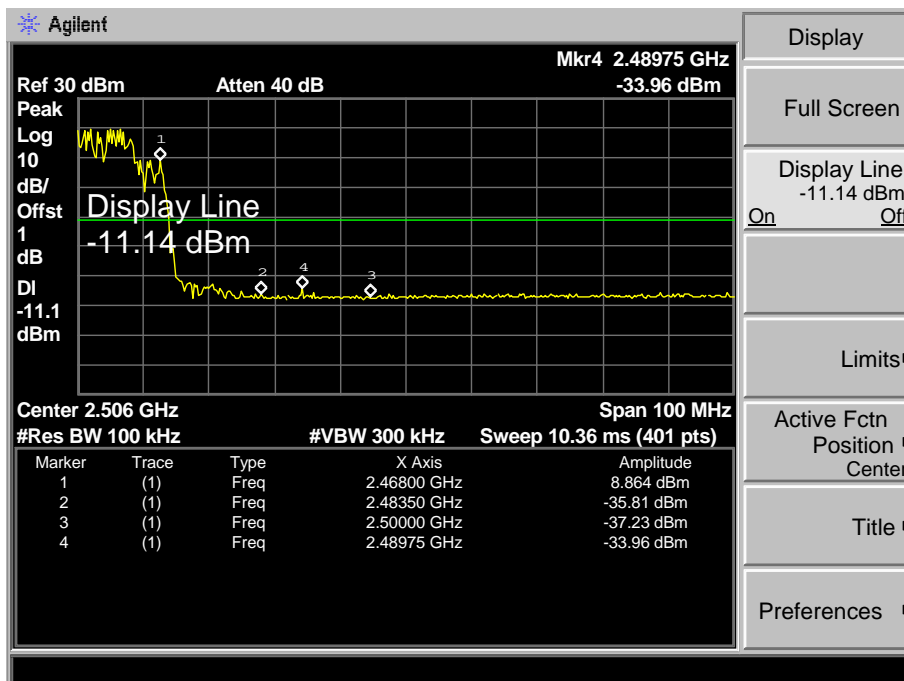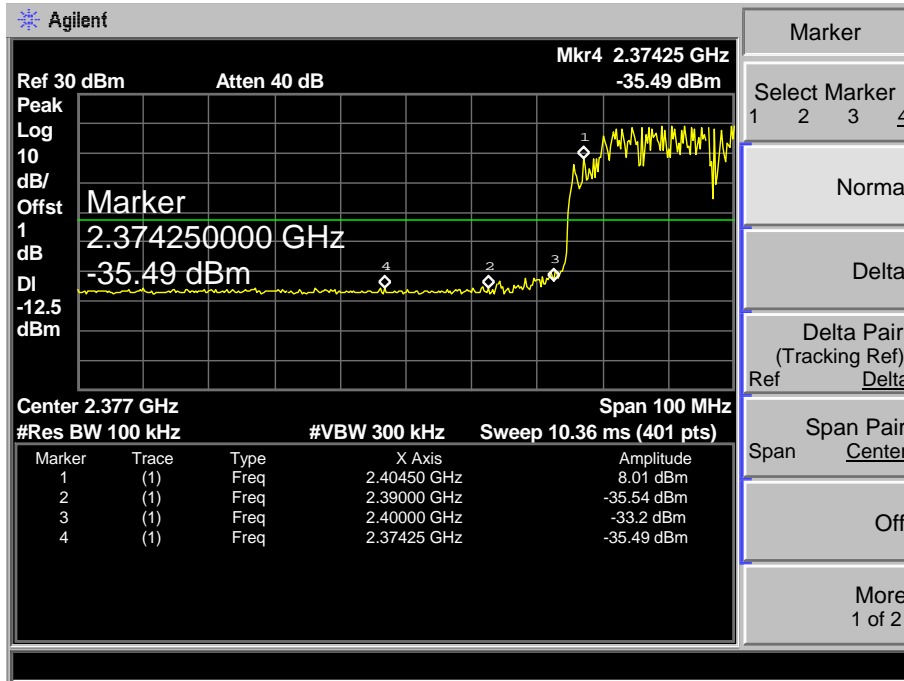

## Attachment D-- Number of Hopping Channel Test Data

| <b>Temperature:</b>  | 25°C   | <b>Relative Humidity:</b>   | 55%   |
|----------------------|--|-----------------------------|-------|
| <b>Test Voltage:</b> | AC 120V/60Hz   |                             |       |
| <b>Test Mode:</b>    | Hopping Mode   |                             |       |
| <b>Remark:</b>       | The number of total hopping frequencies up to 44 and only 20 channels will hopping at the same time. |                             |       |
| Frequency Range      | Test Mode  | Quantity of Hopping Channel | Limit |
| 2403.5MHz~2468MHz    | GFSK   | 44                          | >15   |

### GFSK Mode

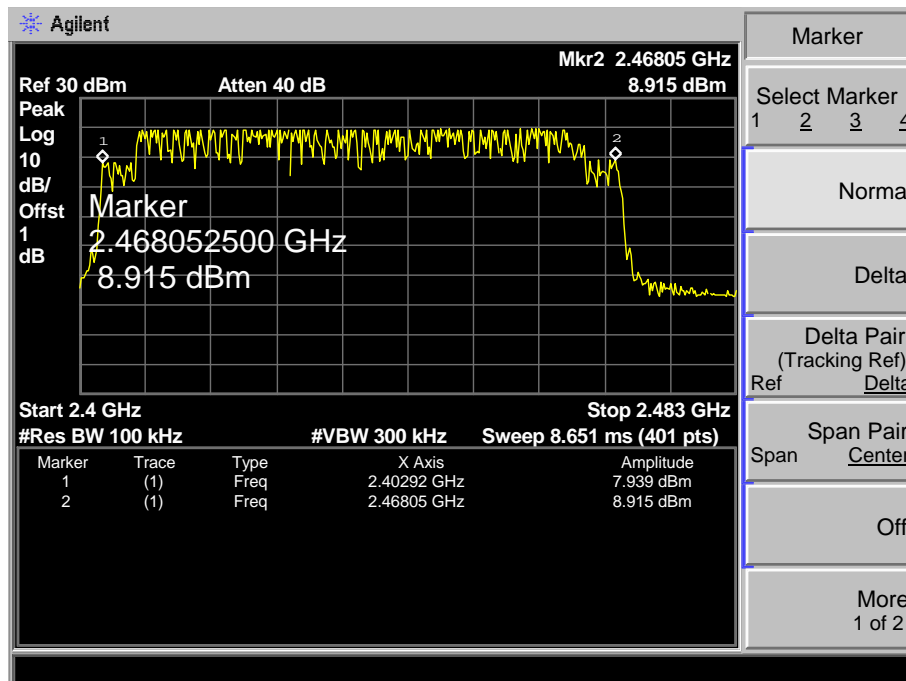



## Attachment E-- Average Time of Occupancy Test Data

| <b>Temperature:</b>  | 25°C   | <b>Relative Humidity:</b> | 55%        |                  |            |        |
|----------------------|--|---------------------------|------------|------------------|------------|--------|
| <b>Test Voltage:</b> | AC 120V/60Hz                                       |                           |            |                  |            |        |
| <b>Test Mode:</b>    | Hopping Mode (GFSK)                                |                           |            |                  |            |        |
| <b>Remark:</b>       | The number of total hopping frequencies up to 44 . |                           |            |                  |            |        |
| Test Mode            | Channel (MHz)                                      | Reading Time (ms)         | Total hops | Test Result (ms) | Limit (ms) | Result |
| GFSK                 | 2439.5   | 3.6144                    | 95         | 343.368          | 400        | PASS   |

The Dwell Time = Burst Width \* Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation:  $0.4 [s] * hopping\ number = 0.4 [s] * 44 [ch] = 17.60[s*ch]$ ;


The burst width, which is directly measured, refers to the duration on one channel hop.

The maximum number of hopping channels in 17.6s is 95.

Reading Time= $0.9036ms*4=3.6144$


### GFSK Hopping Mode

2439.5 MHz

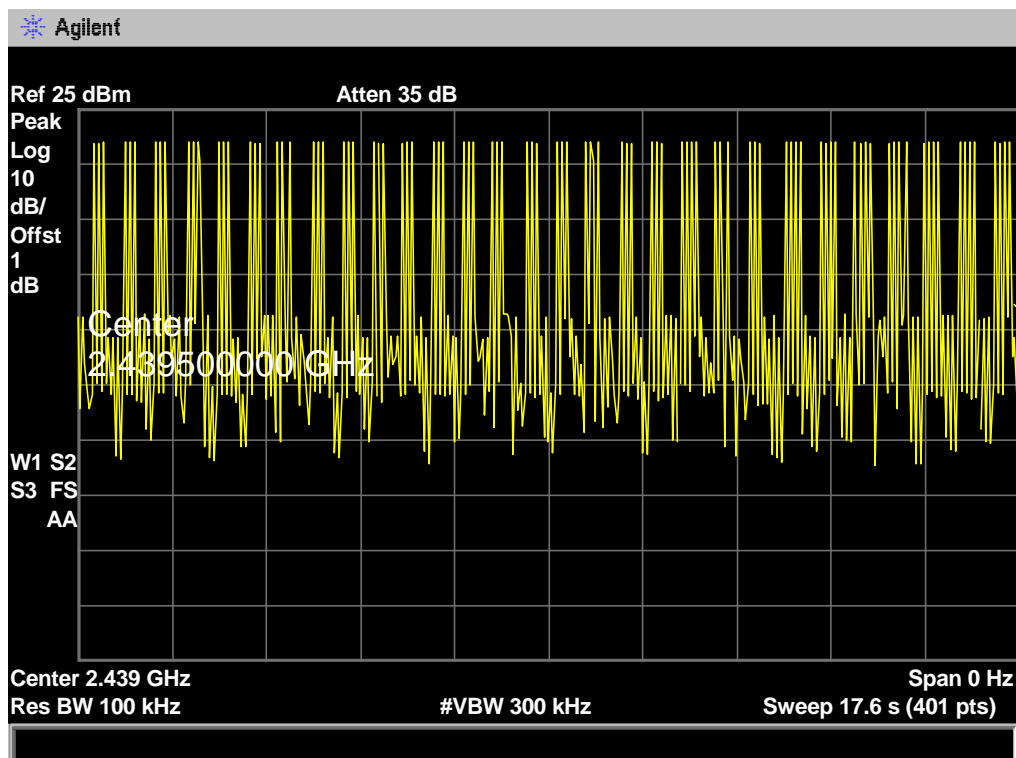


**GFSK Hopping Mode**

2439.5 MHz

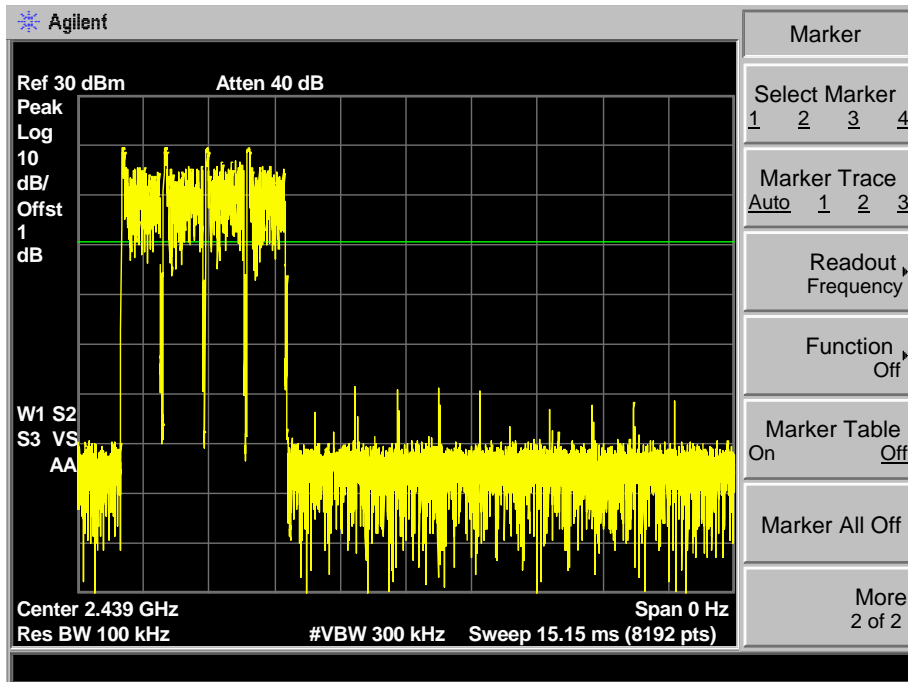

**GFSK Hopping Mode**

2439.5 MHz

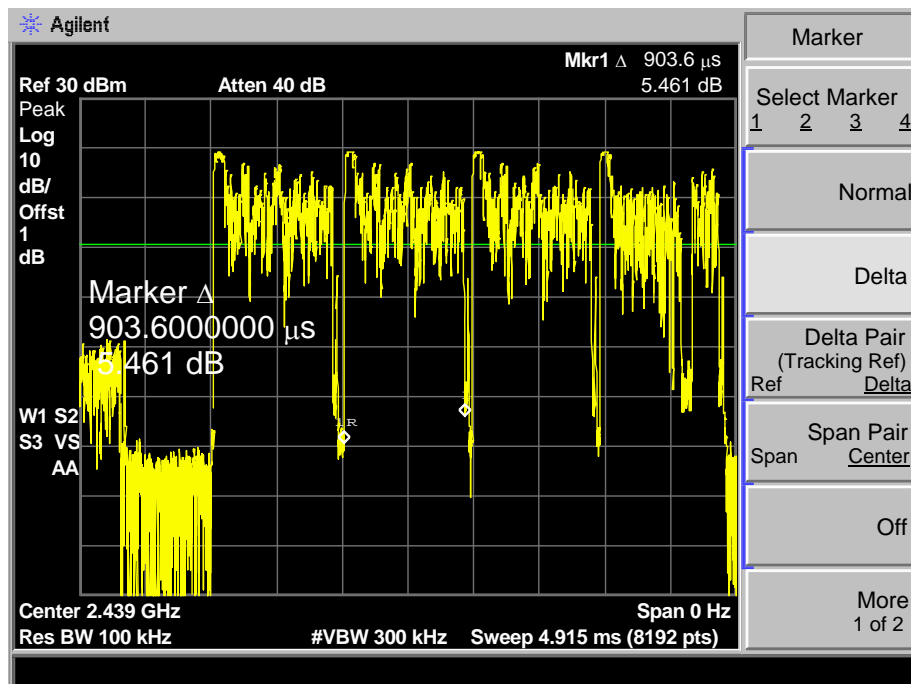


# Attachment F-- Channel Separation and Bandwidth Test Data

**Bandwidth Test Data:**

| <b>Temperature:</b>     | 25°C           | <b>Relative Humidity:</b> | 55%                       |
|-------------------------|----------------|---------------------------|---------------------------|
| <b>Test Voltage:</b>    | AC 120V/60Hz   |                           |                           |
| <b>Test Mode:</b>       | TX Mode (GFSK) |                           |                           |
| Channel frequency (MHz) | 99% OBW (kHz)  | 20dB Bandwidth (kHz)      | 20dB Bandwidth *2/3 (kHz) |
| 2403.5                  | 2156.5         | 2181                      | 1454.00                   |
| 2439.5                  | 2074.9         | 2066                      | 1377.33                   |
| 2468.0                  | 2115.5         | 2164                      | 1442.67                   |


**GFSK TX Mode**

**2403.5 MHz**

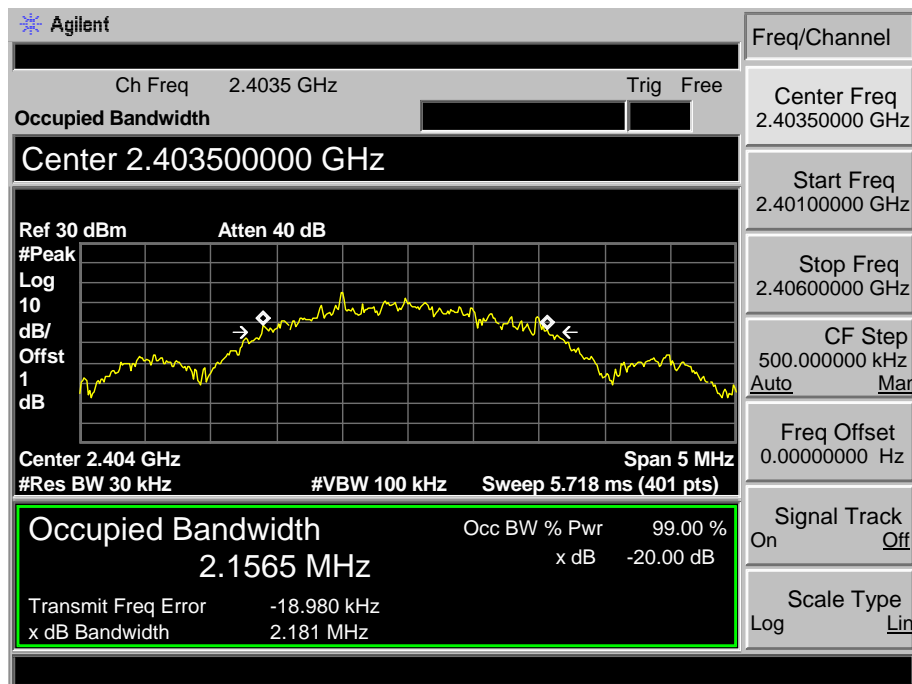


**GFSK TX Mode**

**2439.5 MHz**

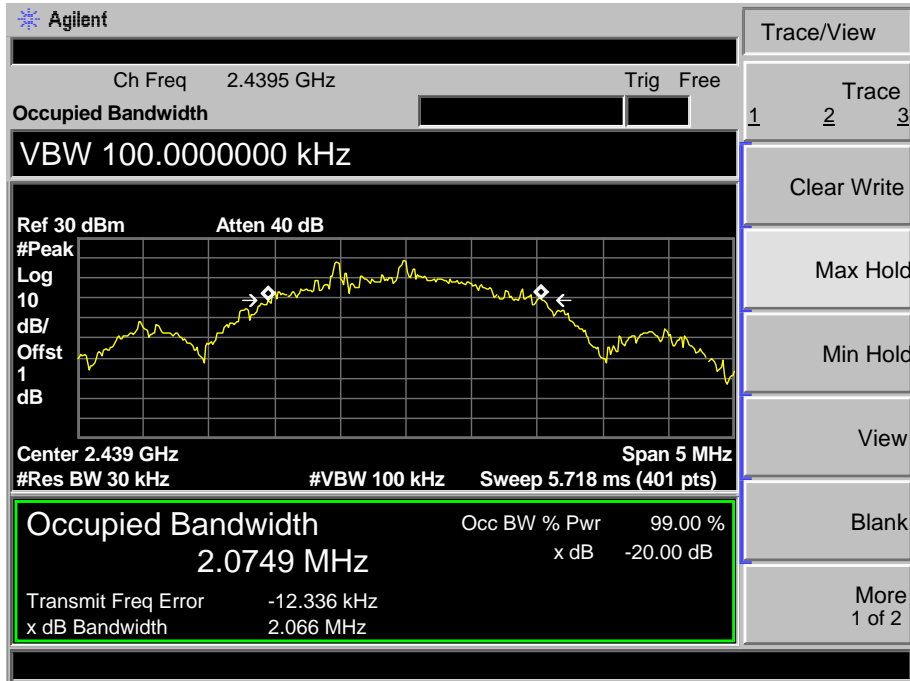


**GFSK TX Mode**

**2468 MHz**

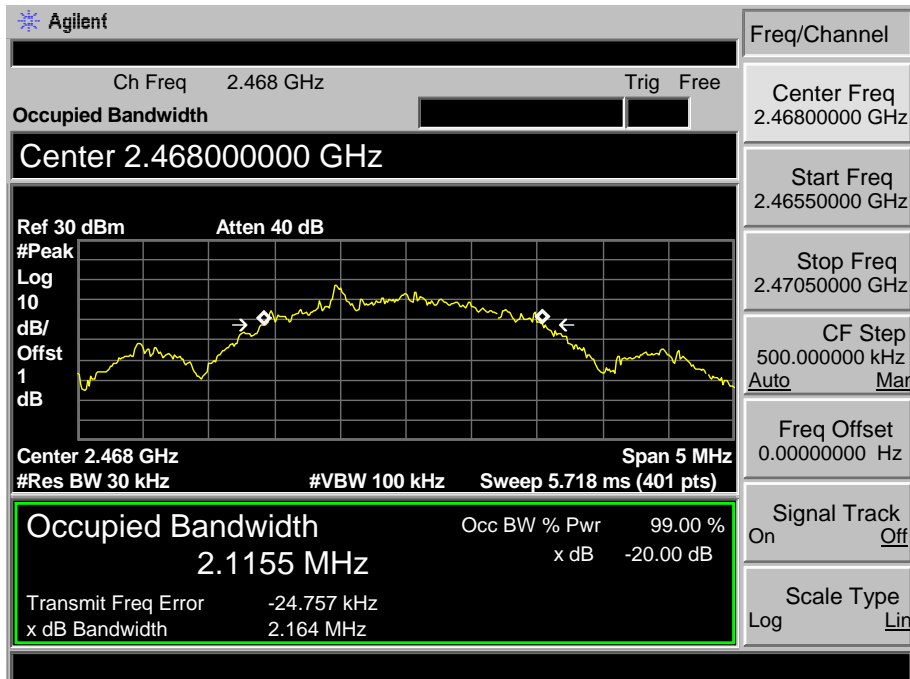


**Channel Separation Test data:**


| <b>Temperature:</b>     | 25°C   | <b>Relative Humidity:</b> | 55% |
|-------------------------|--|---------------------------|-----|
| <b>Test Voltage:</b>    | AC 120V/60Hz   |                           |     |
| <b>Test Mode:</b>       | Hopping Mode (GFSK)  |                           |     |
| <b>Remark:</b>          | We test all channel and worse case recorded in the report. |                           |     |
| Channel frequency (MHz) | Separation Read Value (kHz)                                | Separation Limit (kHz)    |     |
| 2403.5                  | 1500.0   | 1454.00                   |     |
| 2439.5                  | 1522.5   | 1377.33                   |     |
| 2468.0                  | 1462.5   | 1442.67                   |     |

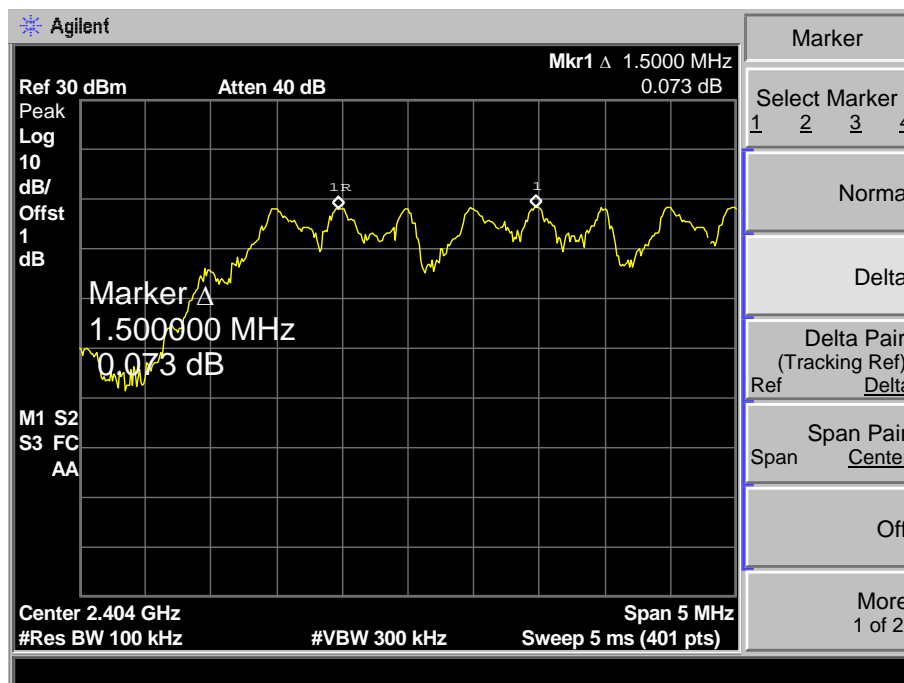**GFSK Hopping Mode**
**2403.5 MHz**


**2439.5MHz**

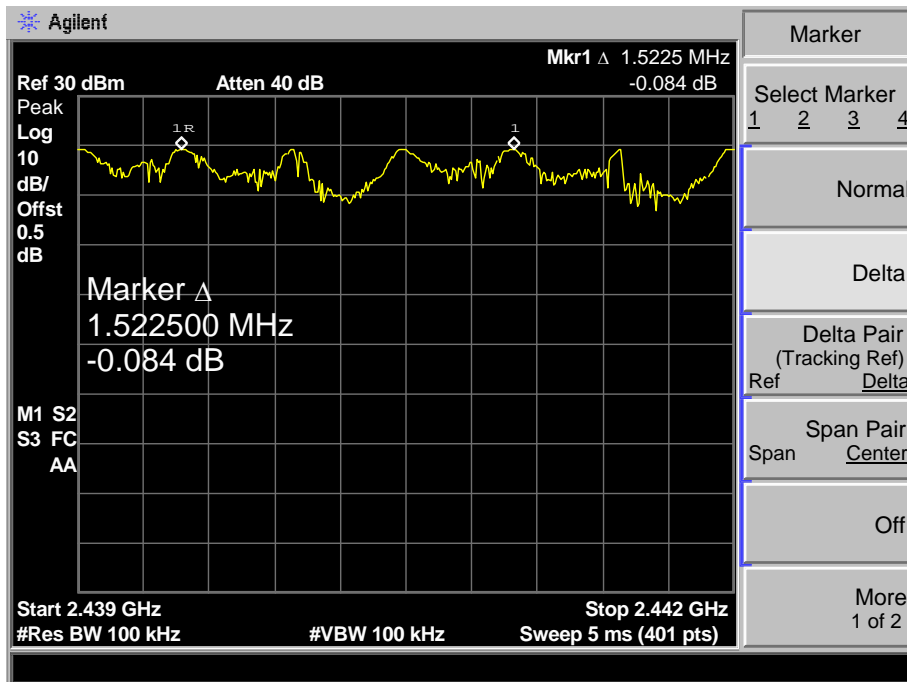

**2468MHz**

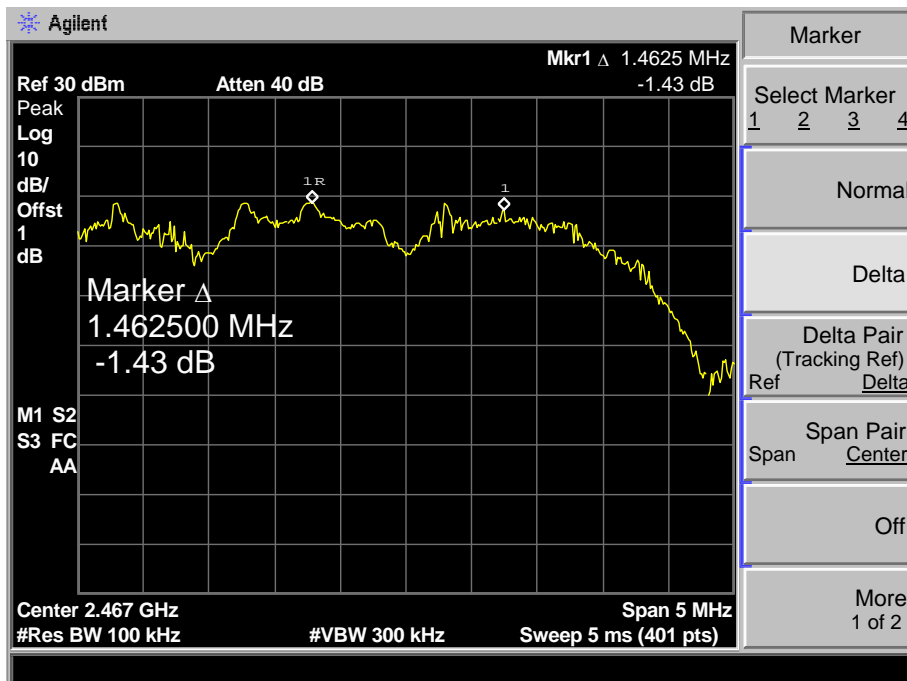


## Attachment G-- Peak Output Power Test Data

| <b>Temperature:</b>     | 25°C              | <b>Relative Humidity:</b> | 55% |
|-------------------------|-------------------|---------------------------|-----|
| <b>Test Voltage:</b>    | AC 120V/60Hz      |                           |     |
| <b>Test Mode:</b>       | TX Mode (GFSK)    |                           |     |
| Channel frequency (MHz) | Test Result (dBm) | Limit (dBm)               |     |
| 2403.5                  | 8.144             | <b>21</b>                 |     |
| 2439.5                  | 19.10             |                           |     |
| 2468.0                  | 8.833             |                           |     |
| <b>GFSK TX Mode</b>     |                   |                           |     |
| <b>2403.5 MHz</b>       |                   |                           |     |
|                         |                   |                           |     |


**GFSK TX Mode**

**2439.5 MHz**

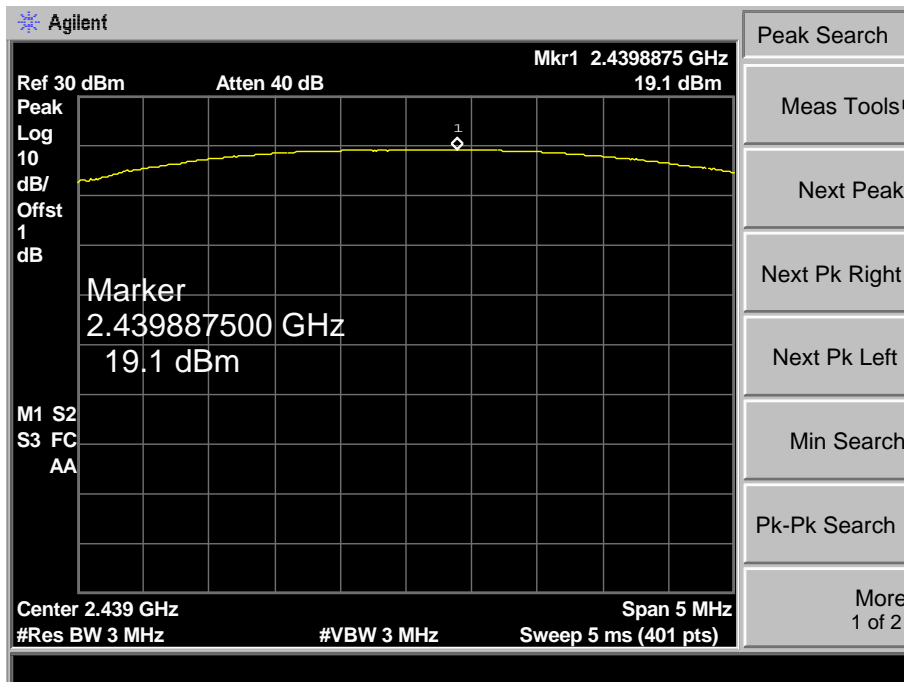

**GFSK TX Mode**

**2468.0 MHz**

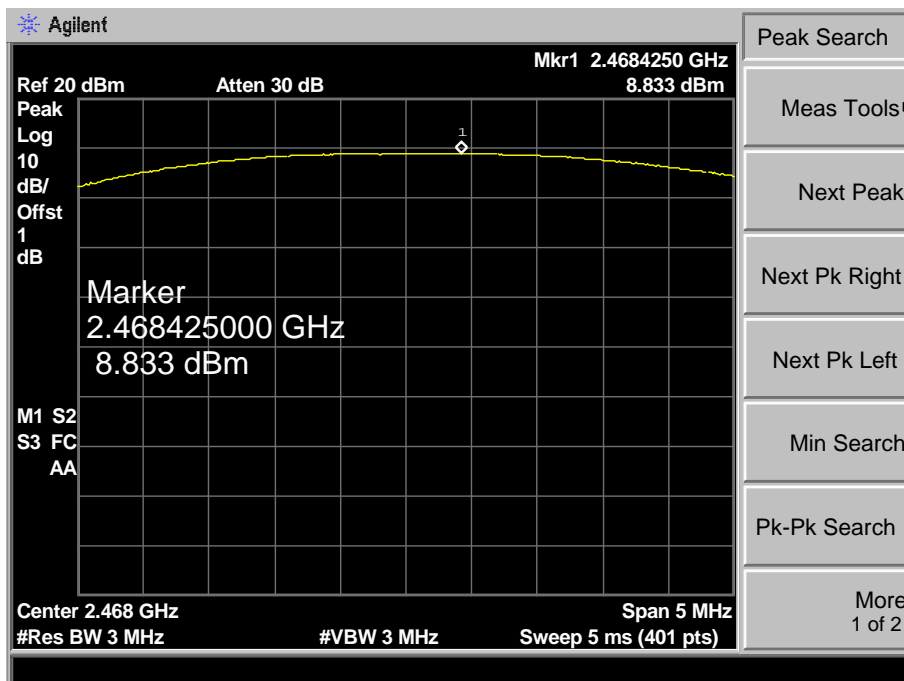

-----END OF REPORT-----