

FCC PART 15E TEST REPORT FOR CERTIFICATION

On Behalf of

Square Inc.

Cash Register

SPB1-01

FCC ID: 2AF3K-SPB1

Prepared for : Square Inc.

1455 Market St. Suite 600 San Francisco, California United
States 94103

Prepared By : Audix Technology (Shenzhen) Co., Ltd.

No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F17140

Date of Test : Jul.04~11, 2017

Date of Report : Jul.11, 2017

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. SUMMARY OF STANDARDS AND RESULTS	1-1
1.1. Description of Standards and Results	1-1
2. GENERAL INFORMATION	2-1
2.1. Description of Device (EUT)	2-1
2.2. Test Information	2-3
2.3. Tested Supporting System Details	2-5
2.4. Block diagram of connection between the EUT and simulators	2-5
2.5. Test Facility	2-6
2.6. Measurement Uncertainty (95% confidence levels, k=2)	2-6
3. POWER LINE CONDUCTED EMISSION TEST	3-1
3.1. Test Equipments	3-1
3.2. Block Diagram of Test Setup	3-1
3.3. Power Line Conducted Emission Test Limits	3-1
3.4. Configuration of EUT on Test	3-2
3.5. Operating Condition of EUT	3-2
3.6. Test Procedure	3-2
3.7. Power Line Conducted Emission Test Results	3-2
4. RADIATED EMISSION TEST	4-1
4.1. Test Equipment	4-1
4.2. Block Diagram of Test Setup	4-2
4.3. Radiated Emission Limit	4-3
4.4. EUT Configuration on Test	4-3
4.5. Operating Condition of EUT	4-4
4.6. Test Procedure	4-4
4.7. Radiated Emission Test Results	4-5
5. BAND EDGE COMPLIANCE TEST	5-1
5.1. Test Equipment	5-1
5.2. Limit	5-1
5.3. Test Procedure	5-1
5.4. Test Results	5-1
6. 6dB & 26dB Bandwidth Test	6-1
6.1. Test Equipment	6-1
6.2. Limit	6-1
6.3. Test Procedure	6-1
6.4. Test Results	6-1
7. OUTPUT POWER TEST	7-1
7.1. Test Equipment	7-1
7.2. Limit	7-1
7.3. Test Procedure	7-1
7.4. Test Results	7-2
8. SPECTRAL DENSITY TEST	8-1
8.1. Test Equipment	8-1
8.2. Limit	8-1
8.3. Test Procedure	8-1
8.4. Test Results	8-2
9. FREQUENCY STABILITY MEASUREMENT	9-1
9.1. Test Equipment	9-1
9.2. Limit	9-1
9.3. Test Procedure	9-1



9.4. Test Result.....9-1

10. ANTENNA REQUIREMENT 10-1

10.1. Standard Applicable 10-1

10.2. Antenna Connected Construction..... 10-1

11. DEVIATION TO TEST SPECIFICATIONS 11-1

12. PHOTOGRAPH OF TEST..... 12-1

12.1. Photos of Power Line Conducted Emission Test 12-1

12.2. Photos of Radiated Emission Test..... 12-2

13. PHOTOS OF EUT..... 13-1

TEST REPORT CERTIFICATION

Applicant : Square Inc.
Manufacturer : Square Inc.
Product : Cash Register
FCC ID : 2AF3K-SPB1
(A) Model No. : SPB1-01
(B) Serial No. : N/A
(C) Test Voltage : AC 120V/60Hz

Tested for comply with:
FCC CFR47 Part 15 Subpart E

Test procedure used:
ANSI C63.10: 2013
KDB789033D01

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart E requirements. The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Jul.04~11, 2017 Report of date: Jul.11, 2017

Prepared by : Monica Liu Reviewed by : Sunny Lu
Monica Liu / Assistant Sunny Lu / Deputy Manager



Approved & Authorized Signer :

David Jin / Manager

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207	PASS
Radiated Emission	FCC Part 15: 15.209	PASS
Band Edge Compliance	FCC Part 15: 15.407	PASS
6dB&26Bandwidth Test	FCC Part 15: 15.407(a)	PASS
Output Power Test	FCC Part 15: 15.407(a)	PASS
Power Spectral Density Test	FCC Part 15: 15.407(a)	PASS
Frequency Stability	FCC Part 15: 15.407(g)	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

N/A is an abbreviation for Not Applicable.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product : Cash Register

Square Register
Model No. : SPB1-01

Customer Display
Model No. : SPB4-01

FCC ID : 2AF3K-SPB1

Radio : IEEE802.11 a/b/g/n/ac; Bluetooth V3.0+EDR; Bluetooth V4.0; NFC

Operation : IEEE 802.11a:
Frequency 5180MHz—5240MHz; 5260MHz—5320MHz
5500MHz—5700MHz; 5745MHz—5825MHz
IEEE 802.11ac VHT20:
5180MHz—5240MHz; 5260MHz—5320MHz
5500MHz—5700MHz; 5745MHz—5825MHz
IEEE 802.11ac VHT40:
5190MHz—5230MHz; 5270MHz—5310MHz
5510MHz—5670MHz; 5755MHz—5795MHz
IEEE 802.11ac VHT80: 5210MHz, 5290MHz; 5530MHz—5690MHz;
5775MHz
IEEE 802.11b: 2412MHz—2462MHz
IEEE 802.11g: 2412MHz—2462MHz
IEEE802.11nHT20: 2412MHz—2462MHz;
5180MHz—5240MHz; 5260MHz—5320MHz
5500MHz—5700MHz; 5745MHz—5825MHz
IEEE802.11nHT40: 2422MHz—2452MHz;
5190MHz—5230MHz; 5270MHz—5310MHz
5510MHz—5670MHz; 5755MHz—5795MHz
Bluetooth : 2402-2480MHz
NFC: 13.56MHz

Max EIRP 22.89dBm

Modulation : IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK)
Technology IEEE 802.11a/g: OFDM(64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11ac VHT20, VHT40, VHT80: OFDM(16QAM, 64QAM,
256QAM, QPSK, BPSK)
IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Bluetooth V3.0+EDR: GFSK, $\pi/4$ DQPSK, 8-DPSK
Bluetooth V4.0: GFSK
NFC: ASK

Antenna Assembly : Antenna Type: PIFA
Gain Bluetooth: 2.77dBi
WIFI 2.4GHz:ANT 0: -1.95dBi; ANT 1: 2.77dBi
WIFI 5GHz:
Band 1: ANT 0: -2.39dBi; ANT 1: 6.13dBi
Band 2: ANT 0: -1.76dBi; ANT 1: 6.74dBi
Band 3: ANT 0: 1.42dBi; ANT 1: 6.92dBi
Band 4: ANT 0: 0.55dBi; ANT 1: 6.98dBi

Applicant : Square Inc.
1455 Market St. Suite 600 San Francisco, California United States
94103

Manufacturer : Square Inc.
1455 Market St. Suite 600 San Francisco, California United States
94103

Factory : Fu Tai Hua Industry (ShenZhen) Co., Ltd.
4/F, Building 3, K1 Area, No. 2, 2nd Donghuan Road, Longhua District,
Shenzhen, Guangdong Province, P.R. China

Power Adapter : Manufacturer: Square, Inc., M/N: SWB2-01;
Cable: Unshielded, Detachable, 1.2m

Accessory Hub : Manufacturer: Square, Inc., M/N: SHB3-01;
Cable: Unshielded, Detachable, 1.25m

Micro USB Cable : Shielded, Detachable, 1.0m

Power Cable : Unshielded, Detachable, 1.3m

Date of Test : Jul.04~11, 2017

Date of Receipt : Jun.24, 2017

2.2. Test Information

A special test software was used to control EUT work in Continuous TX mode (The duty cycle of the test signal is 100%), and select test channel, wireless mode and data rate.


Tested mode, channel, and data rate information			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11a	6	Low :CH36	5180
	6	Middle: CH40	5200
	6	High: CH48	5240
	6	Low :CH52	5260
	6	Middle: CH60	5300
	6	High: CH64	5320
	6	Low :CH100	5500
	6	Middle: CH120	5600
	6	High: CH140	5700
	6	Low :CH149	5745
	6	Middle: CH157	5785
	6	High: CH165	5825
IEEE 802.11nHT20	MCS0	Low :CH36	5180
	MCS0	Middle: CH40	5200
	MCS0	High: CH48	5240
	MCS0	Low :CH52	5260
	MCS0	Middle: CH60	5300
	MCS0	High: CH64	5320
	MCS0	Low :CH100	5500
	MCS0	Middle: CH120	5600
	MCS0	High: CH140	5700
	MCS0	Low :CH149	5745
	MCS0	Middle: CH157	5785
	MCS0	High: CH165	5825
IEEE 802.11nHT40	MCS0	Low :CH38	5190
	MCS0	High: CH46	5230
	MCS0	Low :CH54	5270
	MCS0	High: CH62	5310
	MCS0	Low :CH102	5510
	MCS0	Middle: CH118	5590
	MCS0	High: CH134	5670
	MCS0	Low :CH151	5755
MCS0	High: CH159	5795	

IEEE 802.11acVHT20	MCS0	Low :CH36	5180
	MCS0	Middle: CH40	5200
	MCS0	High: CH48	5240
	MCS0	Low :CH52	5260
	MCS0	Middle: CH60	5300
	MCS0	High: CH64	5320
	MCS0	Low :CH100	5500
	MCS0	Middle: CH120	5600
	MCS0	High: CH140	5700
	MCS0	Low :CH149	5745
	MCS0	Middle: CH157	5785
	MCS0	High: CH165	5825
IEEE 802.11acVHT40	MCS0	Low :CH38	5190
	MCS0	High: CH46	5230
	MCS0	Low :CH54	5270
	MCS0	High: CH62	5310
	MCS0	Low :CH102	5510
	MCS0	Middle: CH118	5590
	MCS0	High: CH134	5670
	MCS0	Low :CH151	5755
	MCS0	High: CH159	5795
IEEE 802.11acVHT80	MCS0	CH42	5210
	MCS0	CH58	5290
	MCS0	Low :CH106	5530
	MCS0	Middle:CH122	5610
	MCS0	High:CH134	5690
	MCS0	CH155	5775
<p>Note: 1. According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.</p> <p>Note: 2. This device support antenna switched diversity and two antenna can not working at the same time, choose Ant 1 which has the worse case emission for the radiated emission and band edge test.</p> <p>Note 3. CH138 compliance with the power and emission limit of U-NII-2C and U-NII-3 frequency band.</p>			

2.3. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	HUAWEI MateBook	---	HUAWEI	G2-MLB	---

2.4. Block diagram of connection between the EUT and simulators

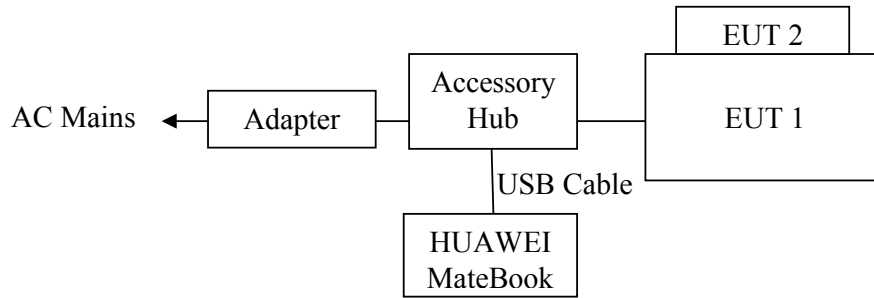

EUT 1: Square Register
 EUT 2: Customer Display

(EUT: Cash Register)

2.5. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
 No. 6, Kefeng Road, Science & Technology
 Park, Nanshan District, Shenzhen, Guangdong,
 China

EMC Lab. : Certificated by Industry Canada
 Registration Number: IC 5183A-1
 Valid Date: May.07, 2020

: Certificated by DAkkS, Germany
 Registration No: D-PL-12151-01-00
 Valid Date: Dec.07, 2021

: Accredited by NVLAP, USA
 NVLAP Code: 200372-0
 Valid Date: Mar.31, 2018

2.6. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	3.6dB (150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	2.8dB(30~200MHz, Polarization: H)
	2.8dB(30~200MHz, Polarization: V)
	2.8dB(200M~1GHz, Polarization: H)
	2.8dB(200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber	5.8dB (1~6GHz, Distance: 3m)
	5.8dB (6~18GHz, Distance: 3m)
	5.8dB (Above 18GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.6dB
Uncertainty for Conduction Spurious emission test	2.0dB
Uncertainty for Output power test	0.8dB
Uncertainty for Bandwidth test	83 kHz
Uncertainty for DC power test	0.1%
Uncertainty for test site temperature and humidity	0.6°C
	3%


3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	Apr.17,17	1 Year
2.	Test Receiver	Rohde & Schwarz	ESCI	100842	Apr.22,17	1 Year
3.	L.I.S.N.	Rohde & Schwarz	ENV216	102160	Mar.06.17	1 Year
4.	L.I.S.N.#2	Kyoritsu	K NW-403D	8-1750-2	Apr.22,17	1 Year
5.	I.S.N.	TESEQ	S751	24559	Mar.06.17	1.year
6.	Terminator	Hubersuhner	50Ω	No.1	Apr.23,17	1 Year
7.	Terminator	Hubersuhner	50Ω	No.2	Apr.23,17	1 Year
8.	RF Cable	Fujikura	RG55/U	NO.2	Apr.22,17	1Year
9.	Coaxial Switch	Anritsu	MP59B	6201397223	Apr.22,17	1 Year
10.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.

3.2. Block Diagram of Test Setup

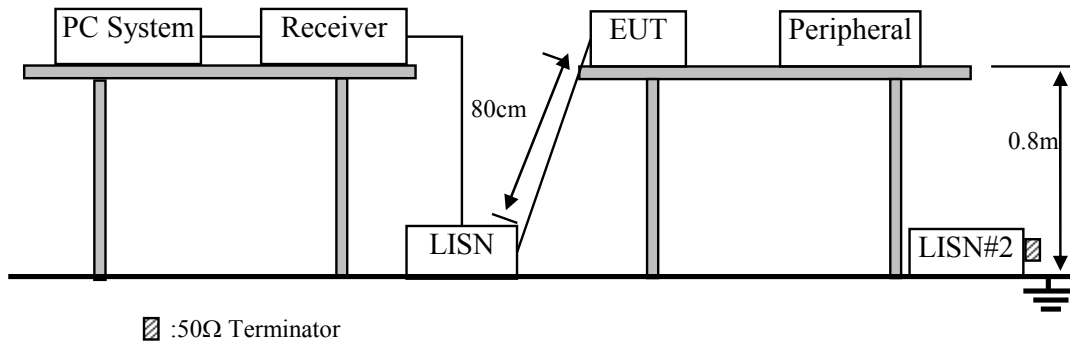

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

- Notes: 1. * Decreasing linearly with logarithm of frequency.
 2. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. Cash Register (EUT)

Model No. : SPB1-01
Serial No. : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

3.5. Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 3.2.

3.5.2. Turn on the power of all equipments.

3.5.3. PC run test software to control EUT work in Tx mode.

3.6. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via PC connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.


The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.


3.7. Power Line Conducted Emission Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)

5180-5240MHz Band:

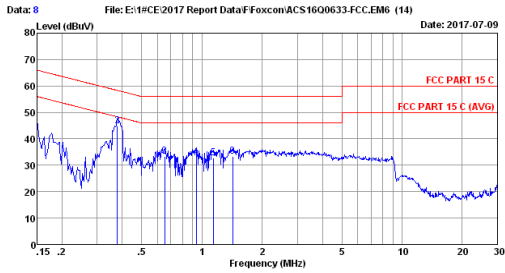

Site no :1# CE Data No :8
 Dis./Lisn :2017 LISN ENV216-L LISN phase:
 Limit :FCC PART 15 C
 Env./Ins. :22.5°C/53% Engineer :Garry
 EUT :Cash Register W/N:SPB1-01
 Power Rating :AC 120V/60Hz
 Test Mode :WiFi 5G Band1 TX

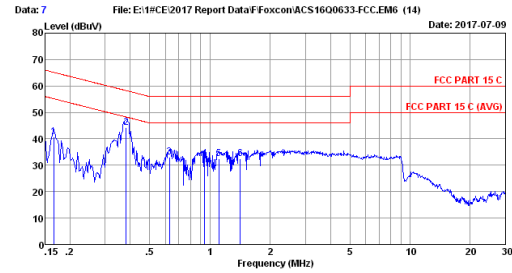

Site no :1# CE Data No :7
 Dis./Lisn :2017 LISN ENV216-N LISN phase:
 Limit :FCC PART 15 C
 Env./Ins. :22.5°C/53% Engineer :Garry
 EUT :Cash Register W/N:SPB1-01
 Power Rating :AC 120V/60Hz
 Test Mode :WiFi 5G Band1 TX


No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	9.52	0.02	34.08	43.62	66.00	22.38	QP
2	0.377	9.39	0.03	35.35	44.77	58.34	13.57	QP
3	0.651	9.50	0.04	23.80	33.34	56.00	22.66	QP
4	0.938	9.49	0.05	23.57	33.11	56.00	22.89	QP
5	1.141	9.49	0.05	23.31	32.85	56.00	23.15	QP
6	1.426	9.49	0.06	23.84	33.39	56.00	22.61	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.166	9.47	0.02	31.21	40.70	65.16	24.46	QP
2	0.381	9.42	0.03	34.88	44.33	58.25	13.92	QP
3	0.627	9.32	0.04	23.80	33.16	56.00	22.84	QP
4	0.943	9.34	0.05	23.10	32.49	56.00	23.51	QP
5	1.106	9.35	0.05	23.13	32.53	56.00	23.47	QP
6	1.418	9.35	0.06	22.94	32.35	56.00	23.65	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.


5260-5320MHz Band:

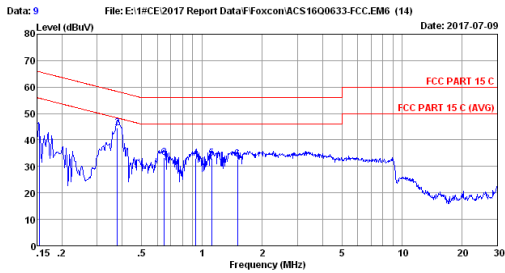

Site no :1# CE Data No :9
 Dis./Lisn :2017 LISN ENV216-L LISN phase:
 Limit :FCC PART 15 C
 Env./Ins. :22.5°C/53% Engineer :Garry
 EUT :Cash Register W/N:SPB1-01
 Power Rating :AC 120V/60Hz
 Test Mode :WiFi 5G Band2 TX

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.154	9.52	0.02	33.51	43.05	65.78	22.73	QP
2	0.377	9.39	0.03	35.23	44.65	58.34	13.69	QP
3	0.647	9.50	0.04	23.71	33.25	56.00	22.75	QP
4	0.933	9.49	0.05	23.55	33.09	56.00	22.91	QP
5	1.117	9.49	0.05	23.50	33.04	56.00	22.96	QP
6	1.503	9.49	0.06	23.35	32.90	56.00	23.10	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

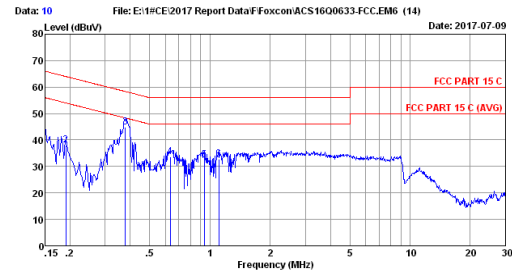


Site no :1# CE Data No :10
 Dis./Lisn :2017 LISN ENV216-N LISN phase:
 Limit :FCC PART 15 C
 Env./Ins. :22.5°C/53% Engineer :Garry
 EUT :Cash Register W/N:SPB1-01
 Power Rating :AC 120V/60Hz
 Test Mode :WiFi 5G Band2 TX

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	9.48	0.02	32.39	41.89	66.00	24.11	QP
2	0.190	9.46	0.02	28.60	38.08	64.02	25.94	QP
3	0.377	9.42	0.03	35.44	44.89	58.34	13.45	QP
4	0.634	9.32	0.04	24.39	33.75	56.00	22.25	QP
5	0.938	9.34	0.05	23.22	32.51	56.00	23.39	QP
6	1.106	9.35	0.05	23.48	32.88	56.00	23.12	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.


5500-5700MHz Band:

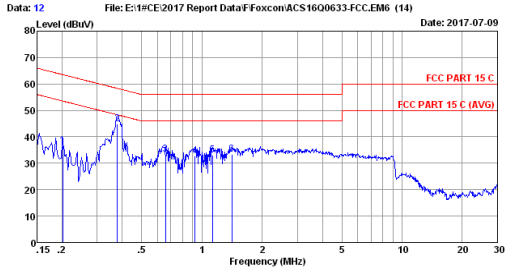

Site no :1# CE Data No :12
 Dis./Lisn :2017 LISN ENV216-L LISN phase:
 Limit :FCC PART 15 C
 Env./Ins. :22.5°C/53% Engineer :Garry
 EUT :Cash Register W/N:SPB1-01
 Power Rating :AC 120V/60Hz
 Test Mode :WiFi 5G Bands TX

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.202	9.49	0.02	26.95	36.46	63.54	27.08	QP
2	0.377	9.39	0.03	35.32	44.74	59.34	13.60	QP
3	0.658	9.50	0.04	23.85	33.39	56.00	22.61	QP
4	0.923	9.49	0.05	23.13	32.67	56.00	23.33	QP
5	1.129	9.49	0.05	23.53	33.07	56.00	22.93	QP
6	1.411	9.49	0.06	23.81	33.36	56.00	22.64	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

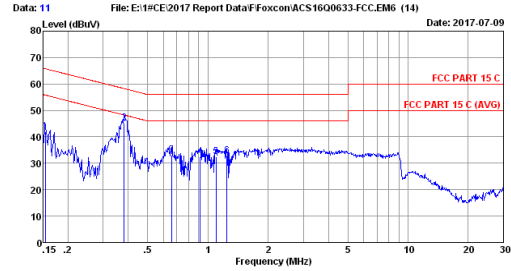


Site no :1# CE Data No :11
 Dis./Lisn :2017 LISN ENV216-N LISN phase:
 Limit :FCC PART 15 C
 Env./Ins. :22.5°C/53% Engineer :Garry
 EUT :Cash Register W/N:SPB1-01
 Power Rating :AC 120V/60Hz
 Test Mode :WiFi 5G Bands TX

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.154	9.48	0.02	32.52	42.02	65.78	23.76	QP
2	0.381	9.42	0.03	35.64	45.09	58.25	13.16	QP
3	0.658	9.32	0.04	23.72	33.08	56.00	22.92	QP
4	0.914	9.34	0.05	23.13	32.52	56.00	23.48	QP
5	1.100	9.35	0.05	23.10	32.50	56.00	23.50	QP
6	1.242	9.35	0.06	23.34	32.75	56.00	23.25	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.


5745-5825MHz Band:

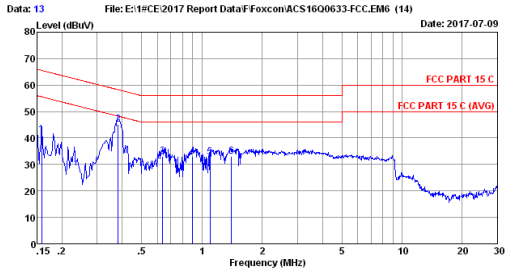

Site no :1# CE Data No :13
 Dis./Lisn :2017 LISN ENV216-L LISN phase:
 Limit :FCC PART 15 C
 Env./Ins. :22.5°C/53% Engineer :Garry
 EUT :Cash Register W/N:SPB1-01
 Power Rating :AC 120V/60Hz
 Test Mode :WiFi 5G Bands TX

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.158	9.52	0.02	31.78	41.32	65.56	24.24	QP
2	0.381	9.41	0.03	35.63	45.07	58.25	13.18	QP
3	0.637	9.50	0.04	23.57	33.11	56.00	22.89	QP
4	0.899	9.49	0.05	23.47	33.01	56.00	22.99	QP
5	1.100	9.49	0.05	23.14	32.68	56.00	23.32	QP
6	1.403	9.49	0.06	23.48	33.03	56.00	22.97	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

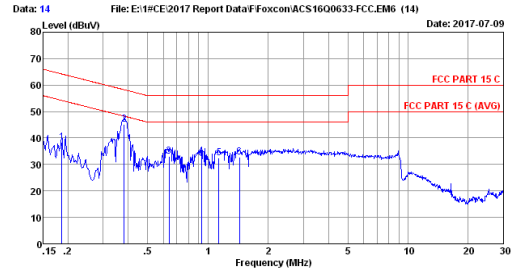

Site no :1# CE Data No :14
 Dis./Lisn :2017 LISN ENV216-N LISN phase:
 Limit :FCC PART 15 C
 Env./Ins. :22.5°C/53% Engineer :Garry
 EUT :Cash Register W/N:SPB1-01
 Power Rating :AC 120V/60Hz
 Test Mode :WiFi 5G Bands TX

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.186	9.47	0.02	28.75	38.24	64.20	25.96	QP
2	0.381	9.42	0.03	35.63	45.08	58.25	13.17	QP
3	0.641	9.32	0.04	23.67	33.03	56.00	22.97	QP
4	0.928	9.34	0.05	23.61	33.00	56.00	23.00	QP
5	1.135	9.35	0.05	23.06	32.46	56.00	23.54	QP
6	1.441	9.35	0.06	23.41	32.82	56.00	23.18	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

4. RADIATED EMISSION TEST

4.1. Test Equipment

4.1.1. For frequency range 30 MHz ~1000MHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	Mar.28,17	1 Year
2.	Spectrum Analyzer	Agilent	E7405A	MY45116588	Oct.15,16	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR7	101547	Apr.22,17	1 Year
4.	Amplifier	HP	8447D	2648A04738	Apr.22,17	1 Year
5.	Bi-log Antenna	TESEQ	CBL6112D	35375	Aug.03,16	1 Year
6.	Loop Antenna	Chase	HLA6120	1062	Sep.25,16	1 Year
7.	RF Cable	MIYAZAKI	CFD400NL-LW	No.3	Sep.26.16	1 Year
8.	Coaxial Switch	Anritsu	MP59B	6201397222	Apr.22,17	1 Year
9.	Attenuator	EMCI	EMCI-N-6-06	AT-N0639	Sep.26.16	1 Year
10.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A

Note: N/A means Not applicable.


4.1.2. For frequency range 1GHz~40GHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	Apr.22,17	1 Year
2.	Horn Antenna	ETC	MCTD 1209	DRH15F03007	May.15,17	1 Year
3.	Amplifier	Agilent	8449B	3008A02495	Apr.22,17	1 Year
4.	RF Cable	Hubersuhner	SUCOFLEX104	274094/4	Apr.22,17	1 Year
5.	Horn Antenna	ETS	3116	00060089	Nov.16,16	1 Year
6.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A


Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

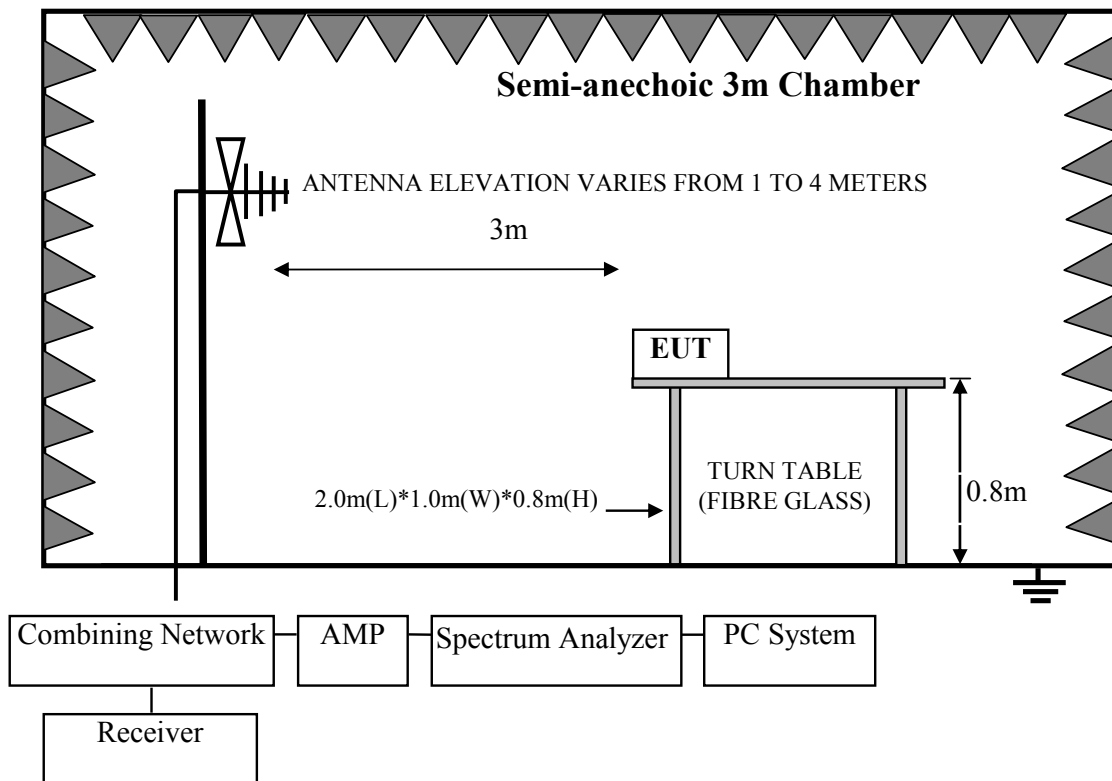

For frequency range 1GHz-25GHz

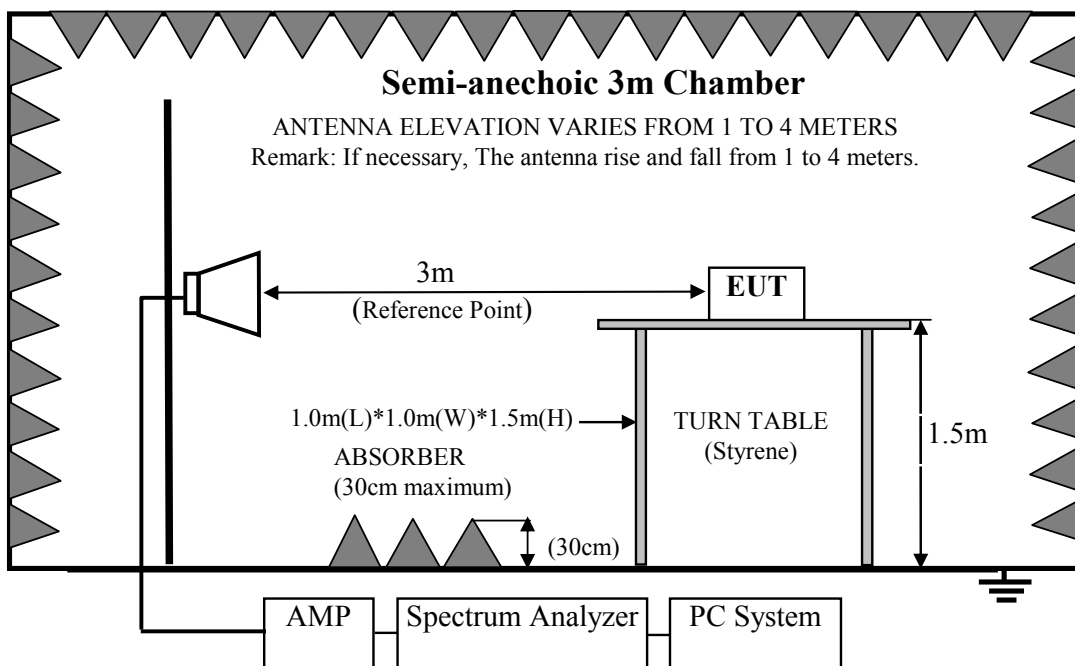

4.3. Radiated Emission Limit

For transmitters operating in the 5.15-5.25 GHz; 5.25-5.35GHz; 5.47-5.725GHz, 5.725-5.850GHz band: all emissions outside of those band shall not exceed an EIRP of -27 dBm/MHz. Unwanted emissions below 1 GHz and those emissions appearing within 15.205 restricted frequency bands must comply with the general field strength limits set forth in Section 15.209

4.3.1. 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

- Remarks :
- (1) Emission level dBμV = 20 log Emission level μV/m
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.3.2. 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

4.4. EUT Configuration on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

4.4.1. Cash Register (EUT)

Model No. : SPB1-01
Serial No. : N/A

4.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

4.5. Operating Condition of EUT

- 4.5.1. Setup the EUT and simulator as shown as Section 4.2.
- 4.5.2. Turn on the power of all equipments.
- 4.5.3. Let EUT work in Tx mode.

4.6. Test Procedure

Frequency below 30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground . The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2013 on radiated emission Test.

For emissions below 1GHz and those emissions appearing within 15.205 restricted frequency bands use below procedure:

The bandwidth of the EMI test receiver (R&S ESR7) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

For the emissions above 1GHz and not appearing within 15.205 restricted frequency bands use below procedure:

- (1). The maximum emission at 3m distance was measured and recorded with receive antenna in both vertical and horizontal by rotating the turntable and by lowering the receive antenna.
- (2). The EUT was then removed and replaced with a substitution antenna in the same position and the substitution antenna must have the same polarization with the receive antenna.
- (3). A signal which have the same frequency obtained in step 2 was fed to the substitution, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver, the level of the signal generator was adjusted until the measured field strength level in step 2 was obtained, recorded the level of the signal generator.
- (4). Repeated step 4 with both antenna polarizations
- (5). The spurious emissions is equal to the power supplied by the signal generator and corrections due to the gain of the substitution antenna and the cable loss between the signal generator and the substitution antenna. or use procedure (6).

(6). Per KDB789033 clause H 2)d).if the test distance is 3m,the EIRP(dBm)=E(dBuv/m)-95.2
Get the result of all unwanted emission outside the restricted band is less than the
-27dBm/MHz.

We had checked frequency range that is 30MHz to 10th harmonic (40GHz) and no any
emissions were found from 18GHz to 40GHz, so the radiated emission from 18GHz to
40GHz were not record.

4.7.Radiated Emission Test Results


PASS.

All the emissions from 30MHz to 1 GHz were comply with 15.209 limits.

All other emission comply with 15.407 (b)(1) requirements.

Note: The emissions (9kHz~30MHz) not reported for there is no emission be found.

**5180-5240MHz Band:
Frequency: 30MHz~1GHz**

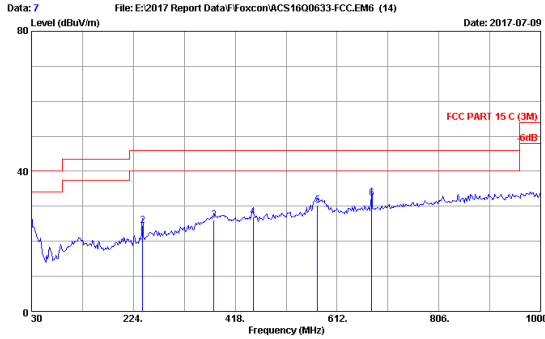


Data: 7 File: E:\2017 Report Data\Ffoxcon\ACS1600633-FCC.EM6 (14) Date: 2017-07-09

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2017 CBL6112D 35375 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 21.8°C/54% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power rating : AC 120V/60Hz
 Test Mode : WIFI 5G Band1 TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	18.90	6.57	-0.25	25.22	40.00	14.78	QP
2	241.460	12.76	7.55	4.24	24.55	46.00	21.45	QP
3	377.260	16.22	8.12	1.67	26.01	46.00	19.99	QP
4	451.950	17.58	8.40	0.88	26.86	46.00	19.14	QP
5	575.140	18.97	8.96	2.59	30.42	46.00	15.58	QP
6	677.960	19.90	9.44	2.91	32.25	46.00	13.75	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

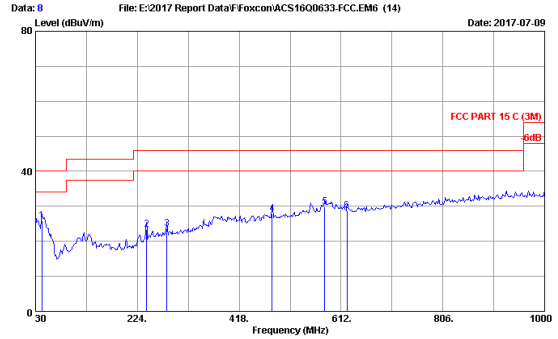


Data: 8 File: E:\2017 Report Data\Ffoxcon\ACS1600633-FCC.EM6 (14) Date: 2017-07-09

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2017 CBL6112D 35375 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 21.8°C/54% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power rating : AC 120V/60Hz
 Test Mode : WIFI 5G Band1 TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	41.640	13.62	6.61	5.70	25.93	40.00	14.07	QP
2	241.460	12.76	7.55	3.12	23.43	46.00	22.57	QP
3	280.260	13.80	7.70	2.02	23.52	46.00	22.48	QP
4	481.050	18.01	8.51	1.32	27.84	46.00	18.16	QP
5	580.960	19.03	8.99	1.95	29.87	46.00	16.13	QP
6	623.640	19.41	9.10	0.21	28.72	46.00	17.28	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Frequency: 1GHz~18GHz

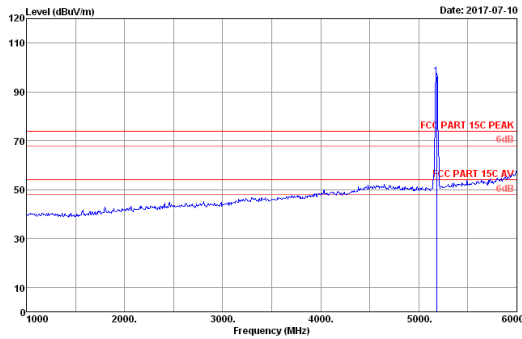

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kV/52.3kV Engineer : Garry
 EUT : Cash Register M/M:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	32.39	12.76	86.73	35.62	96.26	74.00	-22.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

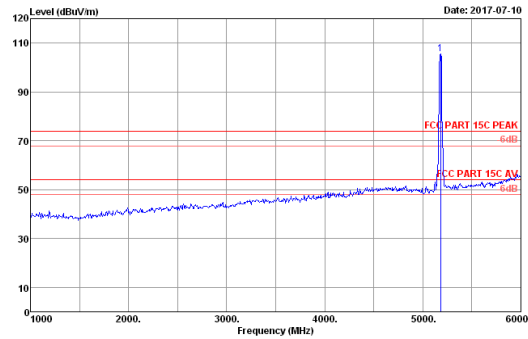

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kV/52.3kV Engineer : Garry
 EUT : Cash Register M/M:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	32.39	12.76	96.19	35.62	105.72	74.00	-31.72	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

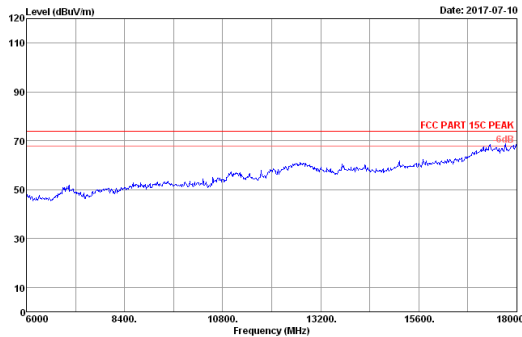

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kV/52.3kV Engineer : Garry
 EUT : Cash Register M/M:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10360.00	38.07	18.14	31.28	36.30	51.19	54.00	2.81	Average
2	10360.00	38.07	18.14	41.56	36.30	61.47	74.00	12.53	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

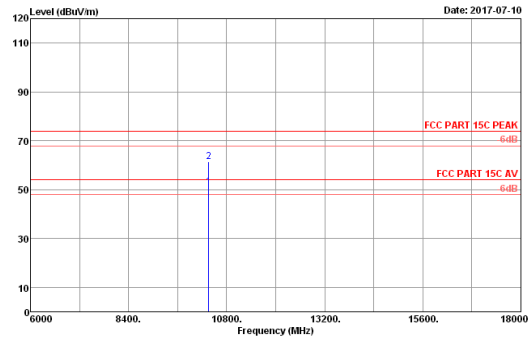


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kV/52.3kV Engineer : Garry
 EUT : Cash Register M/M:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10360.00	38.07	18.14	31.28	36.30	51.19	54.00	2.81	Average
2	10360.00	38.07	18.14	41.56	36.30	61.47	74.00	12.53	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

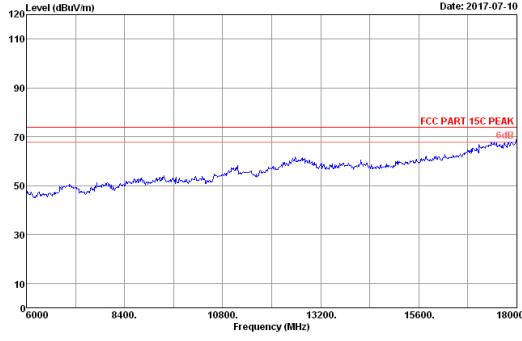


Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5180MHz Tx Mode

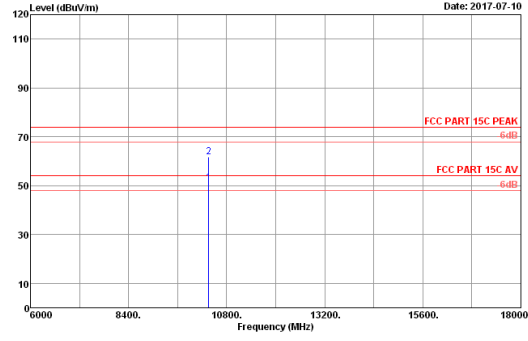

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10360.00	38.07	18.14	31.45	36.30	61.36	54.00	2.64	Average
2	10360.00	38.07	18.14	41.87	36.30	61.78	74.00	12.22	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

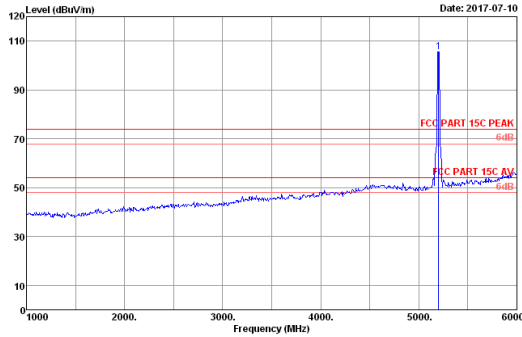

Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5200MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	32.42	12.79	96.15	35.61	105.76	74.00	-31.76	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

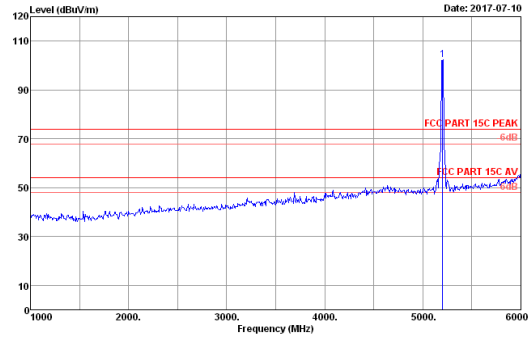


Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5200MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	32.42	12.79	92.92	35.61	102.52	74.00	-28.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

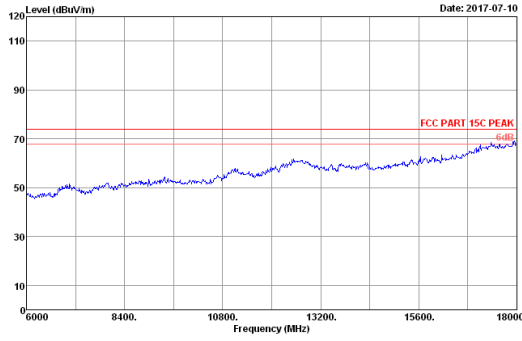


Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5200MHz Tx Mode

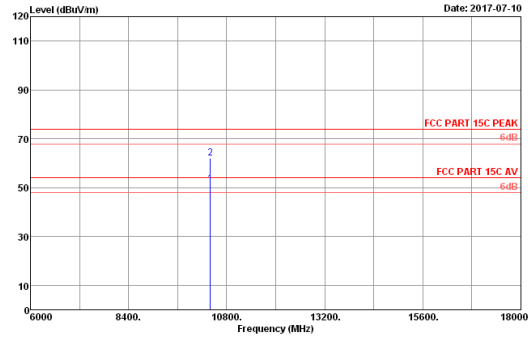


Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5200MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	10400.00	38.10	18.12	31.67	36.31	51.58	54.00	2.42	Average
2	10400.00	38.10	18.12	42.31	36.31	62.22	74.00	11.78	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

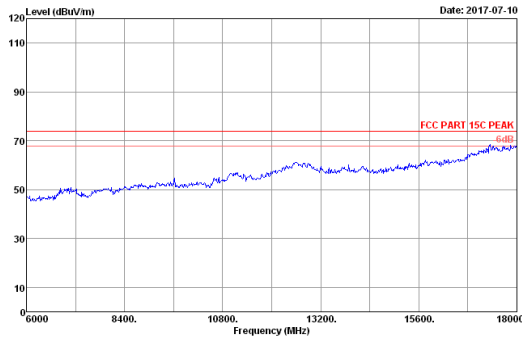


Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5200MHz Tx Mode

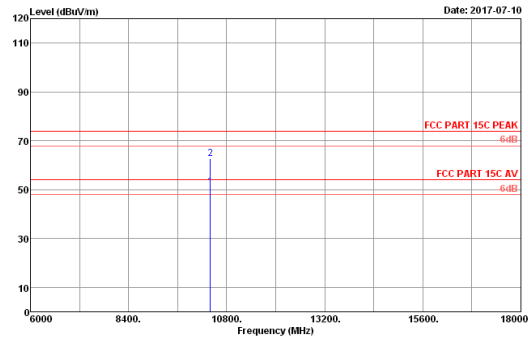

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5200MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	10400.00	38.10	18.12	31.24	36.31	51.16	54.00	2.85	Average
2	10400.00	38.10	18.12	42.67	36.31	62.58	74.00	11.42	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

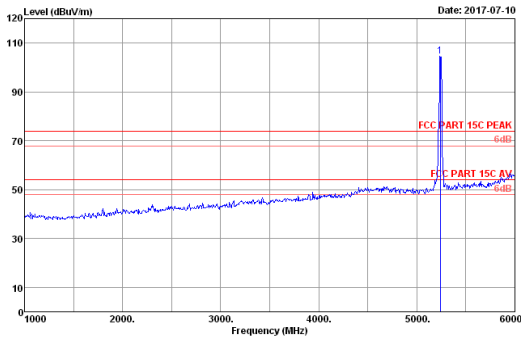

Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5240MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	5240.00	32.47	12.86	95.02	35.59	104.76	74.00	-30.76	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

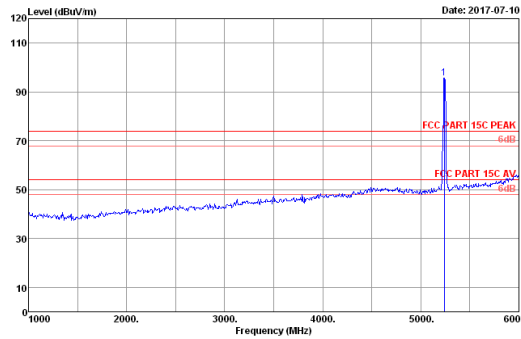


Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5240MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	5240.00	32.47	12.86	85.88	35.59	95.62	74.00	-21.62	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

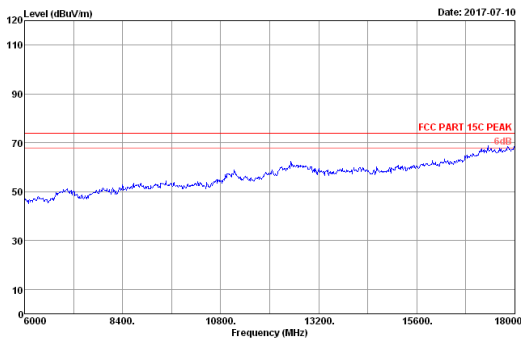


Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5240MHz Tx Mode

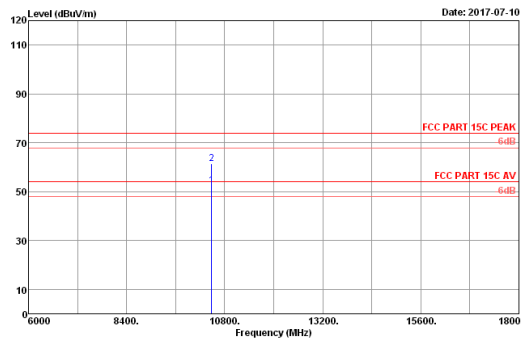


Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5240MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	10480.00	38.18	18.07	32.65	36.32	52.58	54.00	1.42	Average
2	10480.00	38.18	18.07	41.54	36.32	61.47	74.00	12.53	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

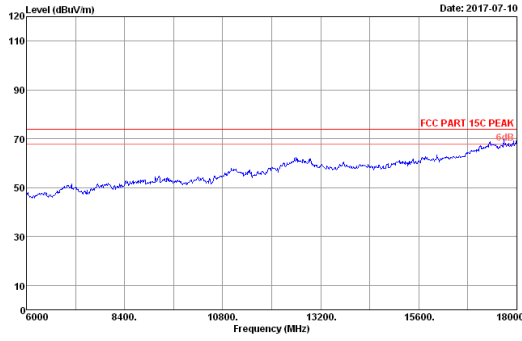


Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5240MHz Tx Mode

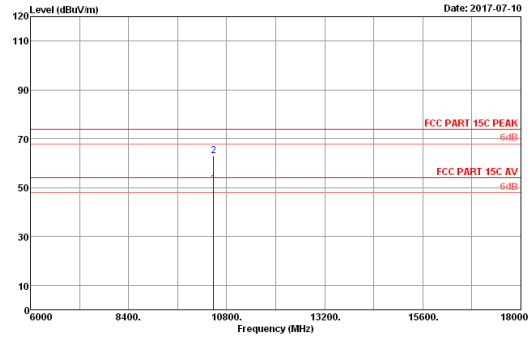

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5240MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10480.00	38.18	18.07	31.58	36.32	51.51	54.00	2.49	Average
2	10480.00	38.18	18.07	43.09	36.32	63.02	74.00	10.98	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

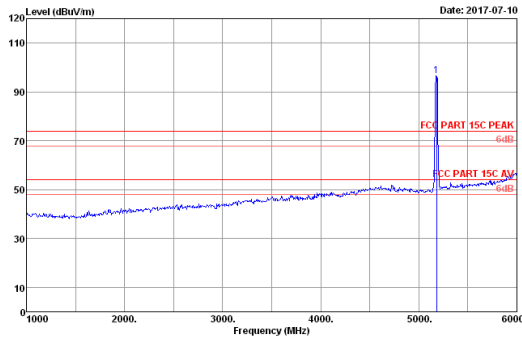

Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	32.39	12.76	66.96	35.62	96.49	74.00	-22.49	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

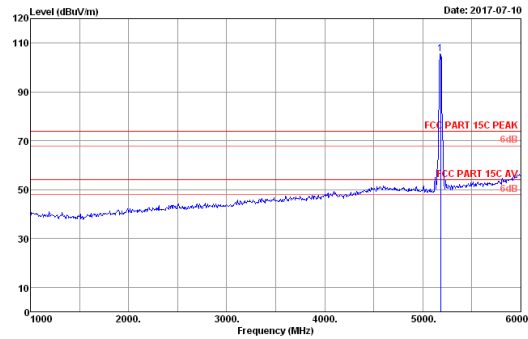


Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	32.39	12.76	96.07	35.62	105.60	74.00	-31.60	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

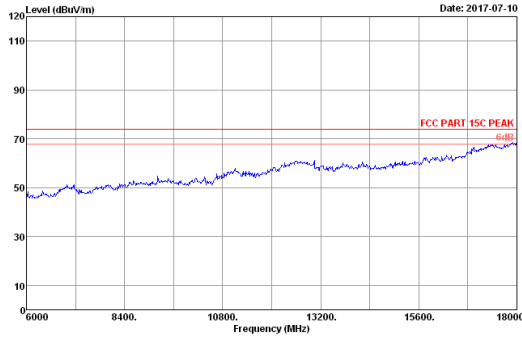


Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5180MHz Tx Mode

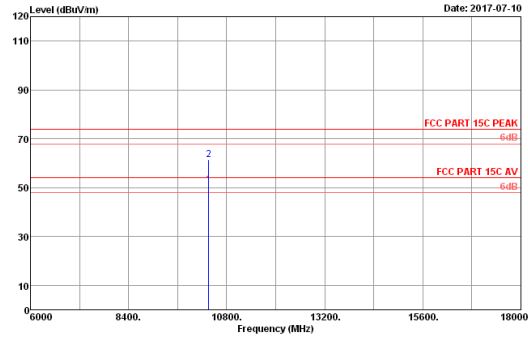


Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading Level (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10360.00	38.07	18.14	31.25	36.30	51.16	54.00	2.84	Average
2	10360.00	38.07	18.14	41.54	36.30	61.45	74.00	12.55	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

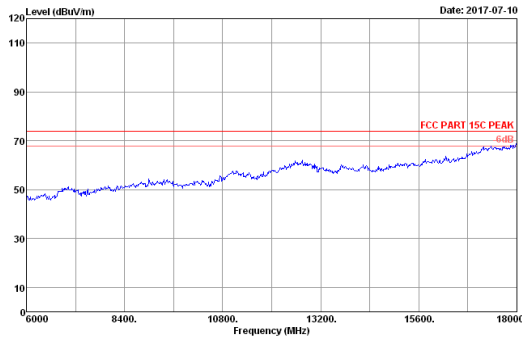


Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5180MHz Tx Mode

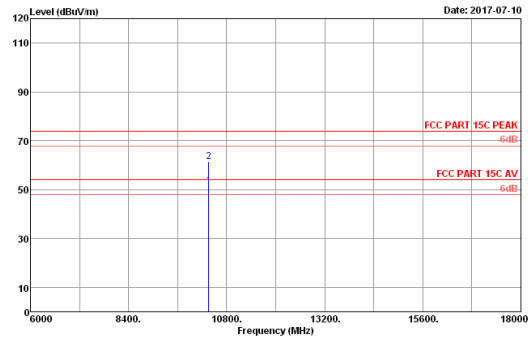

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading Level (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10360.00	38.07	18.14	31.64	36.30	51.55	54.00	2.45	Average
2	10360.00	38.07	18.14	41.38	36.30	61.29	74.00	12.71	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

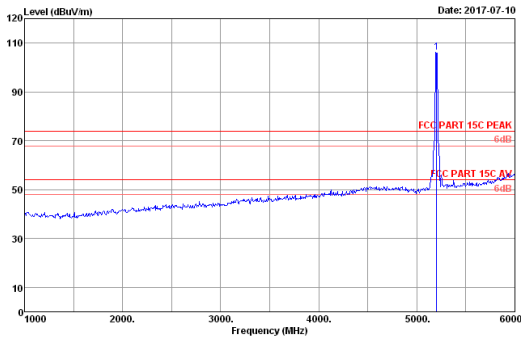

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. pol. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5200MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	32.42	12.79	96.80	35.61	106.40	74.00	-32.40	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

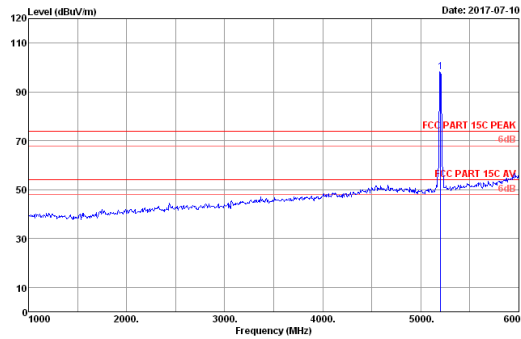

Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. pol. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5200MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	32.42	12.79	88.67	35.61	98.27	74.00	-24.27	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

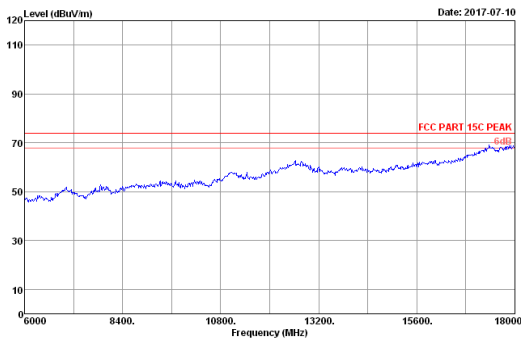

Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. pol. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5200MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10400.00	38.10	18.12	32.14	36.31	52.06	54.00	1.96	Average
2	10400.00	38.10	18.12	41.36	36.31	61.27	74.00	12.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

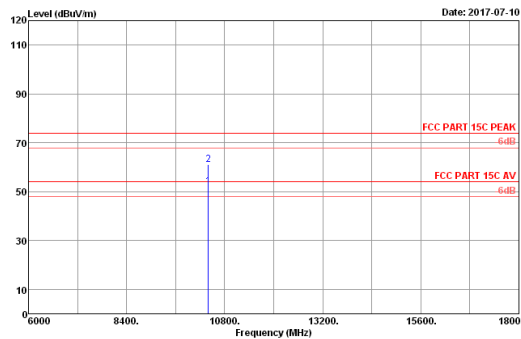


Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. pol. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5200MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10400.00	38.10	18.12	32.14	36.31	52.06	54.00	1.96	Average
2	10400.00	38.10	18.12	41.36	36.31	61.27	74.00	12.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

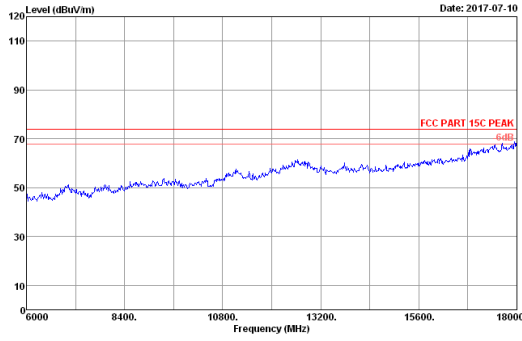


Date: 2017-07-10
 Site no. : 3n Chamber Data no. : 41
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. pre : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5200MHz Tx Mode

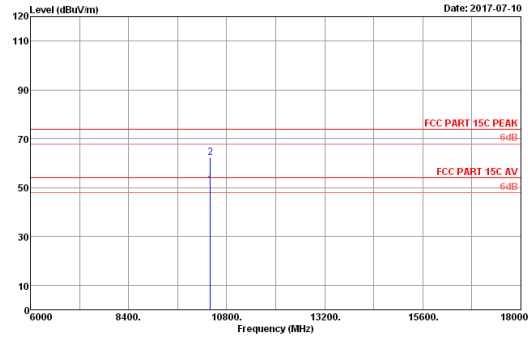

Date: 2017-07-10
 Site no. : 3n Chamber Data no. : 42
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. pre : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5200MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10400.00	38.10	18.12	31.28	36.31	51.19	54.00	2.81	Average
2	10400.00	38.10	18.12	42.36	36.31	62.27	74.00	11.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

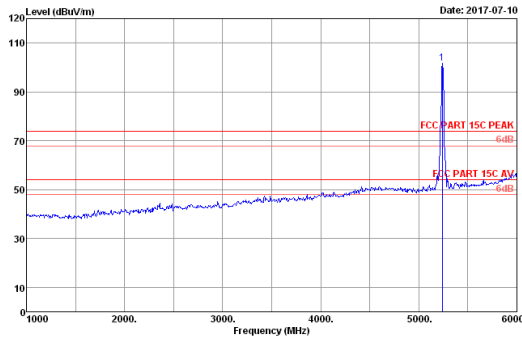

Date: 2017-07-10
 Site no. : 3n Chamber Data no. : 43
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. pre : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5240MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	32.47	12.86	91.95	35.59	101.69	74.00	-27.69	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

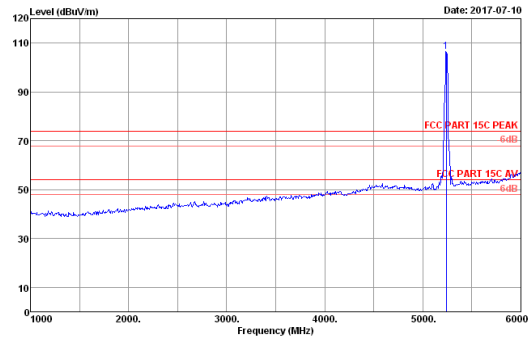


Date: 2017-07-10
 Site no. : 3n Chamber Data no. : 44
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. pre : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5240MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	32.47	12.86	96.91	35.59	106.65	74.00	-32.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

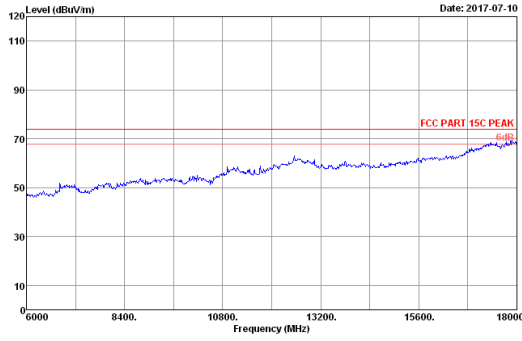


Site no. : 3m Chamber Data no. : 45
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5240MHz Tx Mode

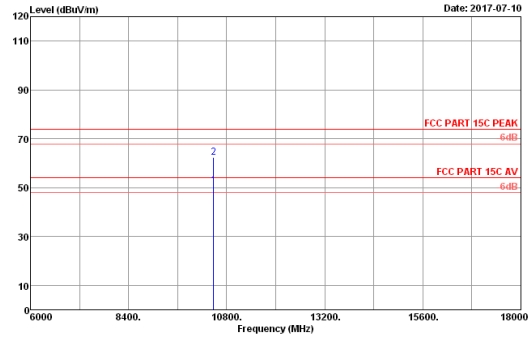


Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5240MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.00	38.18	18.07	31.08	36.32	51.01	54.00	2.99	Average
2	10480.00	38.18	18.07	42.37	36.32	62.30	74.00	11.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

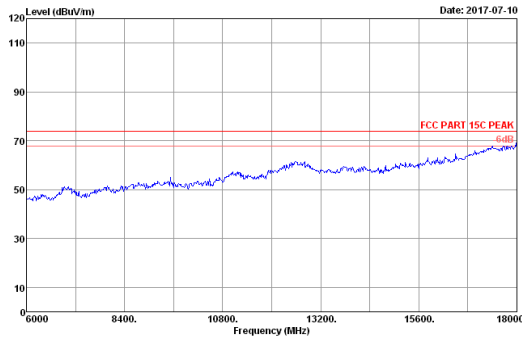


Site no. : 3m Chamber Data no. : 47
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5240MHz Tx Mode

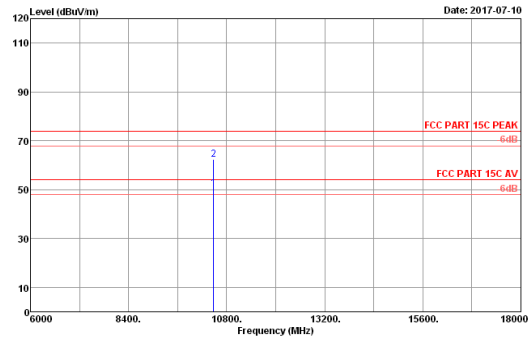

Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5240MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.00	38.18	18.07	30.52	36.32	50.46	54.00	3.56	Average
2	10480.00	38.18	18.07	42.44	36.32	62.37	74.00	11.63	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

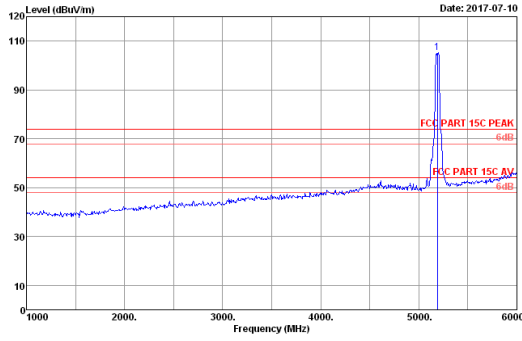

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 53
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5190MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	5190.00	32.39	12.76	95.71	35.62	105.24	74.00	-31.24	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

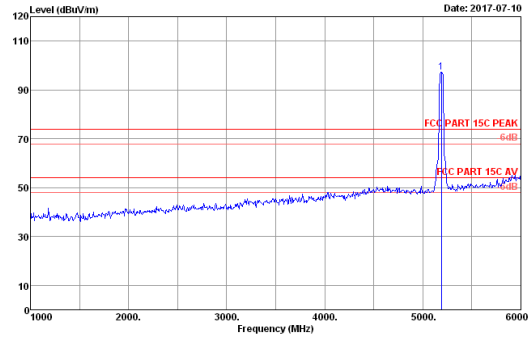


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5190MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	5190.00	32.39	12.76	87.84	35.62	97.37	74.00	-23.37	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

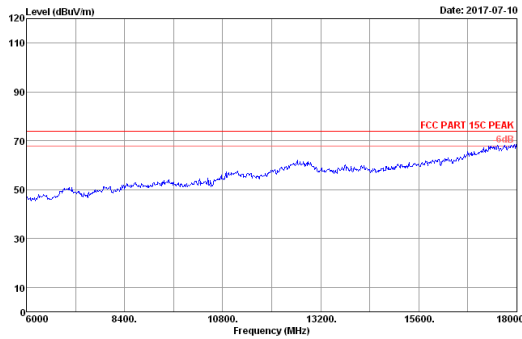


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5190MHz Tx Mode

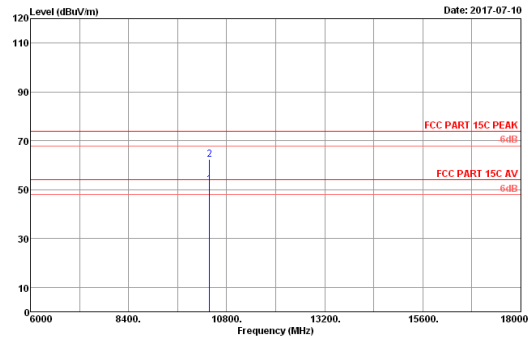


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5190MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	10380.00	38.08	18.13	32.17	36.30	52.08	54.00	1.92	Average
2	10380.00	38.08	18.13	42.61	36.30	62.52	74.00	11.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

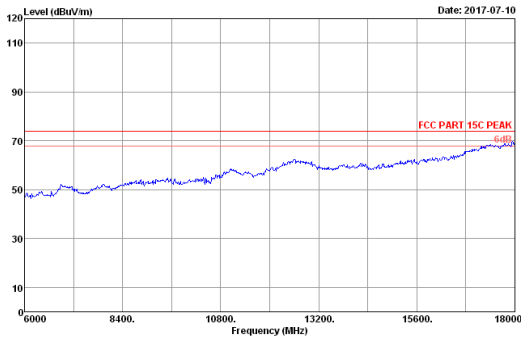


Site no. : 3m Chamber Data no. : 57
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5190MHz Tx Mode

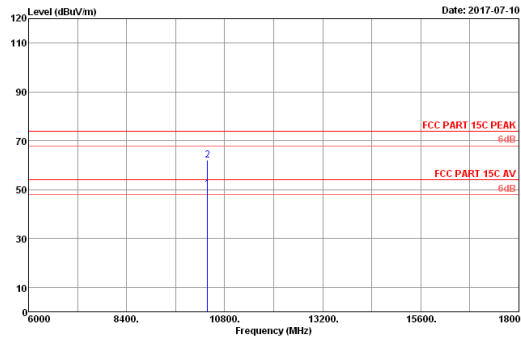

Site no. : 3m Chamber Data no. : 58
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5190MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10380.00	38.08	18.13	30.24	36.30	50.15	54.00	3.85	Average
2	10380.00	38.08	18.13	42.17	36.30	62.08	74.00	11.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

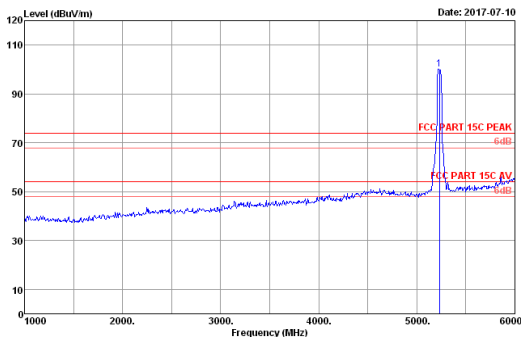

Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5230MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5230.00	32.47	12.83	90.49	35.60	100.19	74.00	-26.19	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

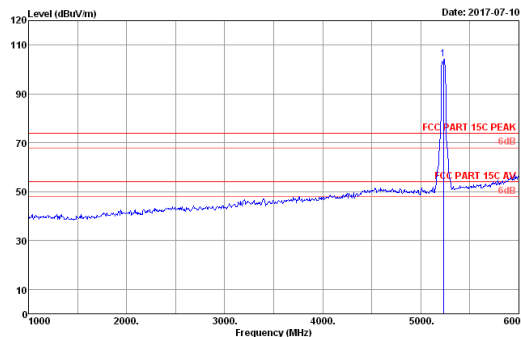


Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5230MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5230.00	32.47	12.83	94.50	35.60	104.20	74.00	-30.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

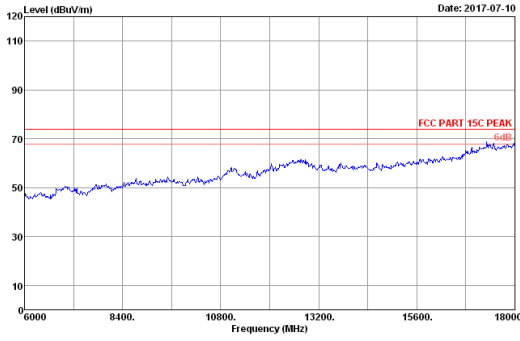


Site no. : 3m Chamber Data no. : 65
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Fre : 101.2kPa
 Env. / Ins. : 23.1kV/62.3kV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5230MHz Tx Mode

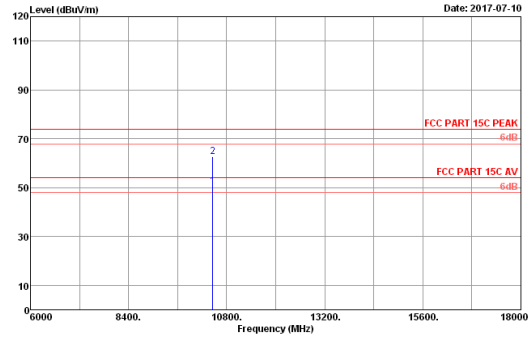


Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Fre : 101.2kPa
 Env. / Ins. : 23.1kV/62.3kV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5230MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.00	38.15	18.08	30.74	36.31	50.66	54.00	3.34	Average
2	10460.00	38.15	18.08	42.67	36.31	62.59	74.00	11.41	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

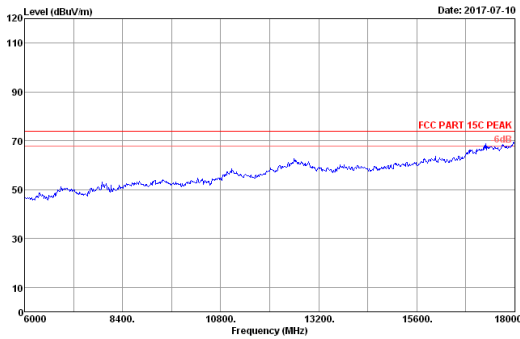


Site no. : 3m Chamber Data no. : 67
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Fre : 101.2kPa
 Env. / Ins. : 23.1kV/62.3kV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5230MHz Tx Mode

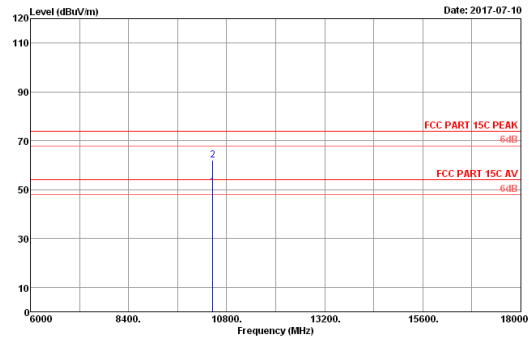

Site no. : 3m Chamber Data no. : 68
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Fre : 101.2kPa
 Env. / Ins. : 23.1kV/62.3kV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5230MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.00	38.15	18.08	31.27	36.31	51.19	54.00	2.81	Average
2	10460.00	38.15	18.08	42.17	36.31	62.09	74.00	11.91	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

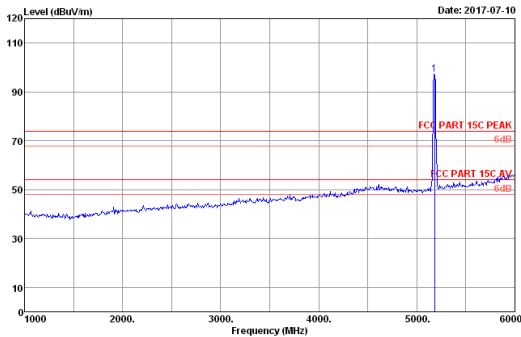

Site no. : 3n Chamber Data no. : 73
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	32.39	12.76	87.72	35.62	97.25	74.00	-23.25	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

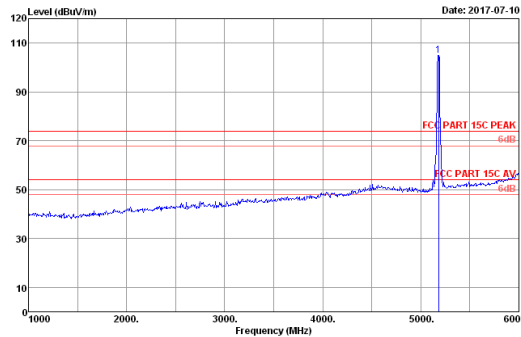

Site no. : 3n Chamber Data no. : 74
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	32.39	12.76	95.54	35.62	105.07	74.00	-31.07	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

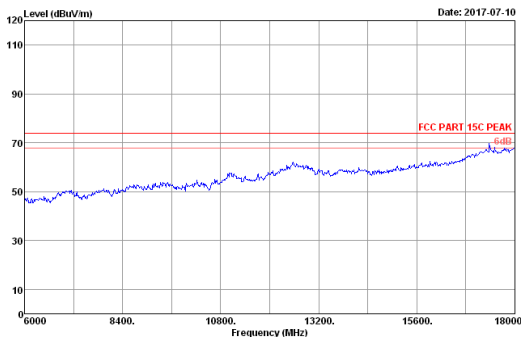

Site no. : 3n Chamber Data no. : 75
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10360.00	38.07	18.14	31.75	36.30	51.66	54.00	2.34	Average
2	10360.00	38.07	18.14	42.16	36.30	62.07	74.00	11.93	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

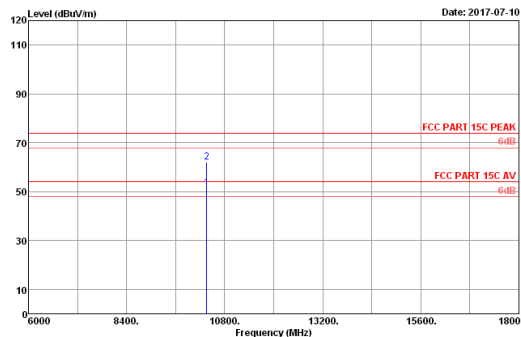


Site no. : 3n Chamber Data no. : 76
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10360.00	38.07	18.14	31.75	36.30	51.66	54.00	2.34	Average
2	10360.00	38.07	18.14	42.16	36.30	62.07	74.00	11.93	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

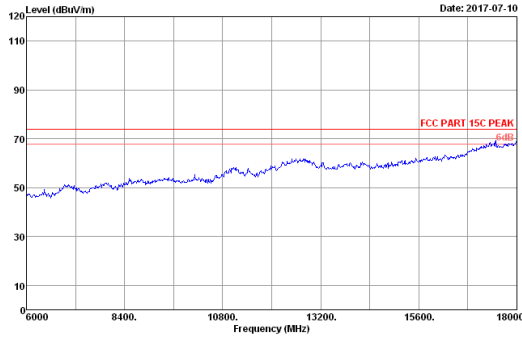


Date: 2017-07-10
 Site no. : 3n Chamber Data no. : 77
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5180MHz Tx Mode

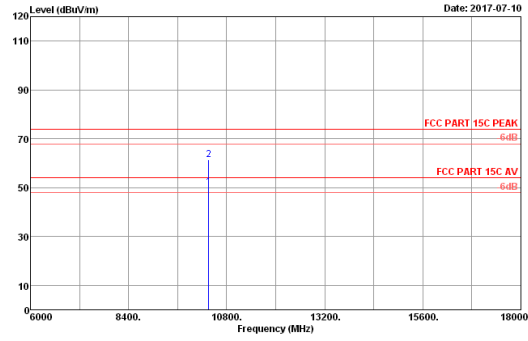

Date: 2017-07-10
 Site no. : 3n Chamber Data no. : 78
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10360.00	38.07	18.14	30.47	36.30	50.38	54.00	3.62	Average
2	10360.00	38.07	18.14	41.56	36.30	61.47	74.00	12.53	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

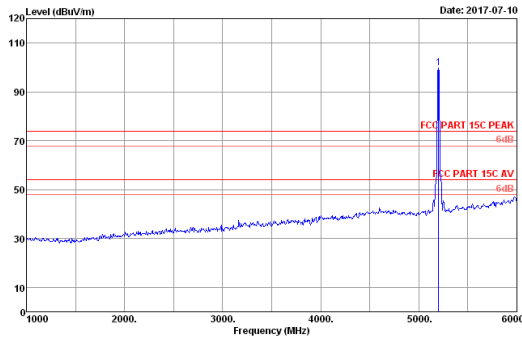

Date: 2017-07-10
 Site no. : 3n Chamber Data no. : 83
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5200MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	32.42	12.79	90.13	35.61	99.73	74.00	-25.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

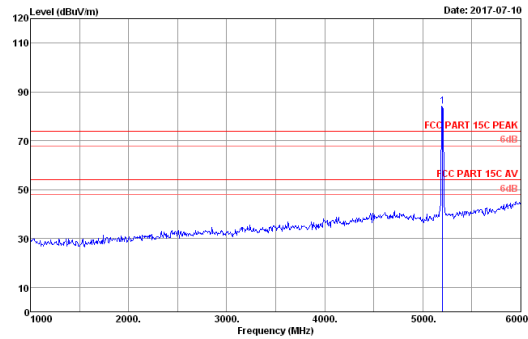


Date: 2017-07-10
 Site no. : 3n Chamber Data no. : 84
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5200MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	32.42	12.79	74.62	35.61	84.22	74.00	-10.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

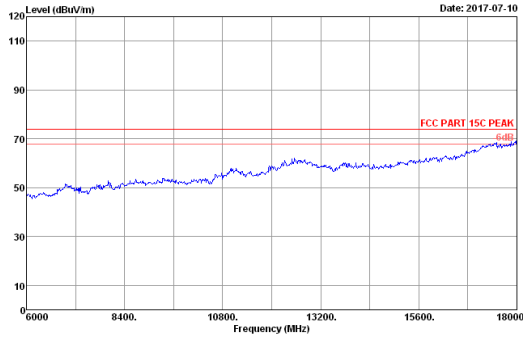


Site no. : 3m Chamber Data no. : 85
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5200MHz Tx Mode

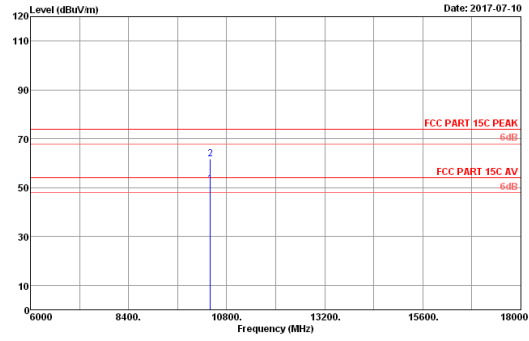


Site no. : 3m Chamber Data no. : 86
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5200MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10400.00	38.10	18.12	31.49	36.31	61.40	64.00	2.60	Average
2	10400.00	38.10	18.12	41.91	36.31	61.82	74.00	12.18	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

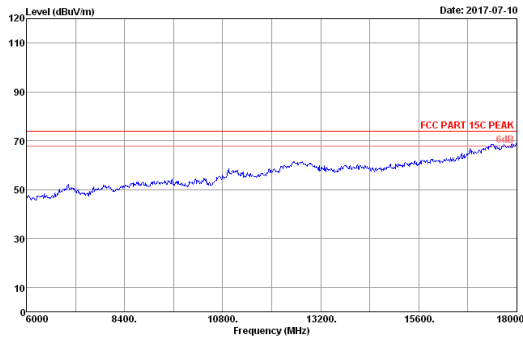


Site no. : 3m Chamber Data no. : 87
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5200MHz Tx Mode

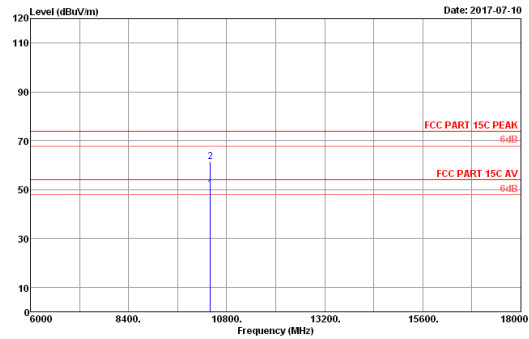

Site no. : 3m Chamber Data no. : 88
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5200MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10400.00	38.10	18.12	30.47	36.31	60.38	64.00	3.62	Average
2	10400.00	38.10	18.12	41.39	36.31	61.30	74.00	12.70	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

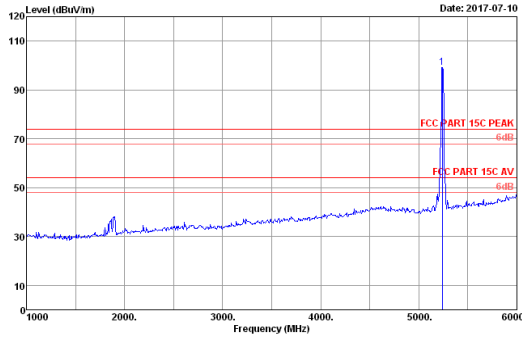

Site no. : 3m Chamber Data no. : 89
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. pol. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5240MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	32.47	12.86	89.40	35.59	99.14	74.00	-25.14	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

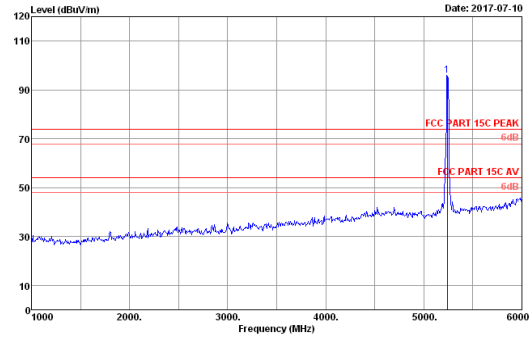


Site no. : 3m Chamber Data no. : 90
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. pol. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5240MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	32.47	12.86	86.17	35.59	95.91	74.00	-21.91	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

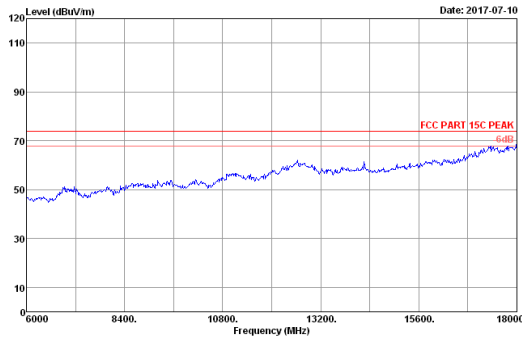


Site no. : 3m Chamber Data no. : 91
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. pol. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5240MHz Tx Mode

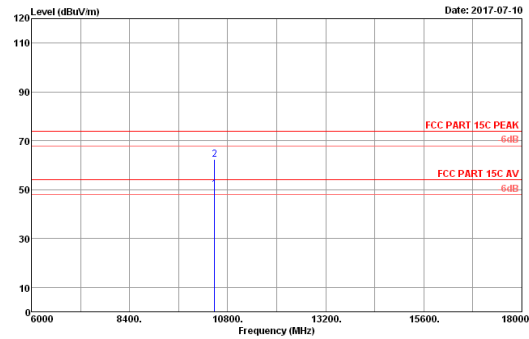


Site no. : 3m Chamber Data no. : 92
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. pol. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5240MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10480.00	38.18	18.07	30.19	36.32	54.11	54.00	3.89	Average
2	10480.00	38.18	18.07	42.37	36.32	62.30	74.00	11.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

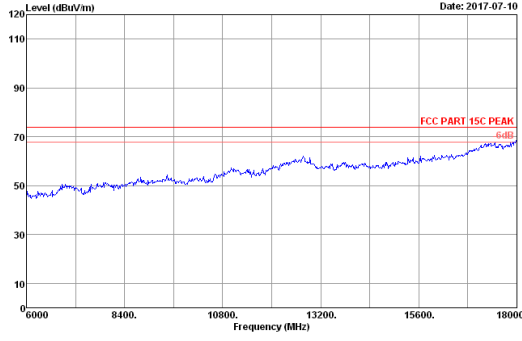


Date: 2017-07-10
 Site no. : 3n Chamber Data no. : 93
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5240MHz Tx Mode

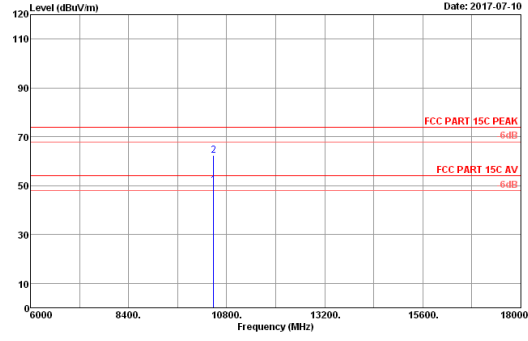

Date: 2017-07-10
 Site no. : 3n Chamber Data no. : 94
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5240MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10480.00	38.18	18.07	30.29	36.32	62.45	54.00	3.79	Average
2	10480.00	38.18	18.07	42.52	36.32	62.45	74.00	11.55	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

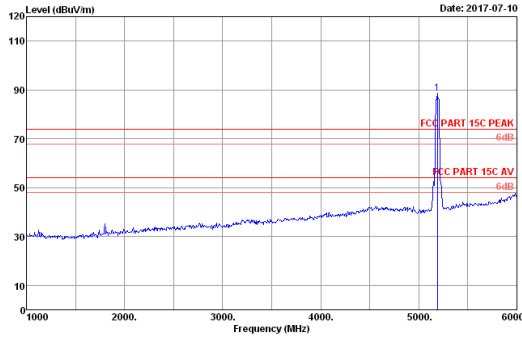

Date: 2017-07-10
 Site no. : 3n Chamber Data no. : 99
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5190MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5190.00	32.39	12.76	79.16	35.62	88.69	74.00	-14.69	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

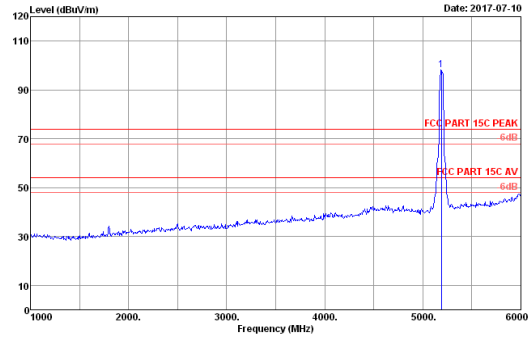


Date: 2017-07-10
 Site no. : 3n Chamber Data no. : 100
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5190MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5190.00	32.39	12.76	88.60	35.62	98.13	74.00	-24.13	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

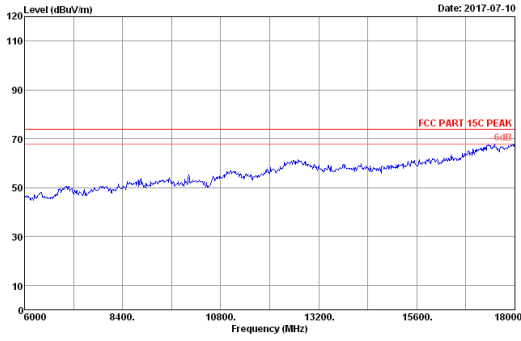


Site no. : 3m Chamber Data no. : 101
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5190MHz Tx Mode

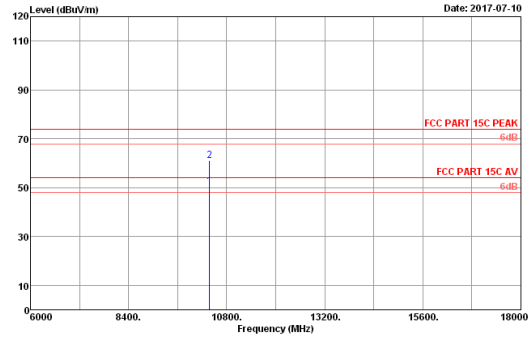


Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5190MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10380.00	38.08	18.13	30.57	36.30	50.48	54.00	3.52	Average
2	10380.00	38.08	18.13	41.36	36.30	61.27	74.00	12.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

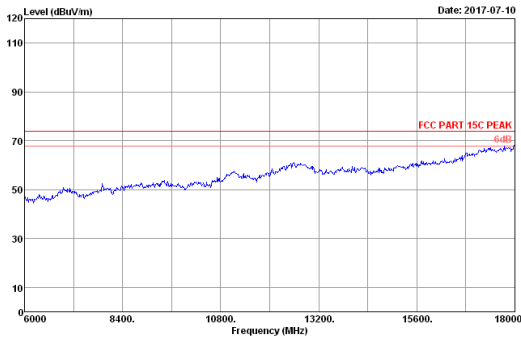


Site no. : 3m Chamber Data no. : 103
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5190MHz Tx Mode

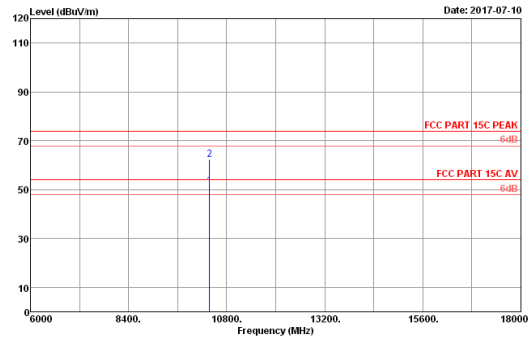

Site no. : 3m Chamber Data no. : 104
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5190MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10380.00	38.08	18.13	31.68	36.30	51.59	54.00	2.41	Average
2	10380.00	38.08	18.13	42.36	36.30	62.27	74.00	11.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

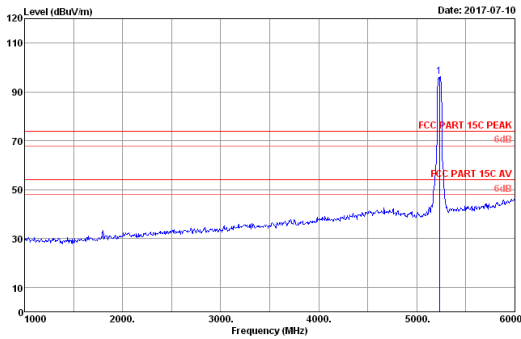

Site no. : 3m Chamber Data no. : 109
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Freq. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5230MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5230.00	32.47	12.83	86.62	35.60	96.32	74.00	-22.32	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

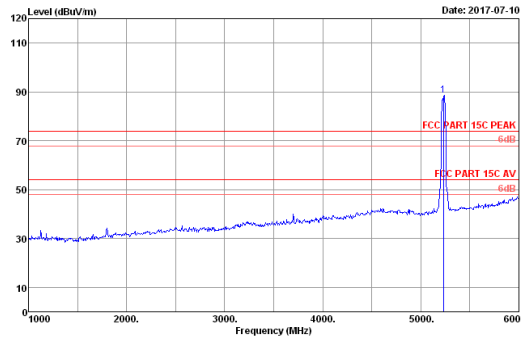


Site no. : 3m Chamber Data no. : 110
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. Freq. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5230MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5230.00	32.47	12.83	79.01	35.60	88.71	74.00	-14.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

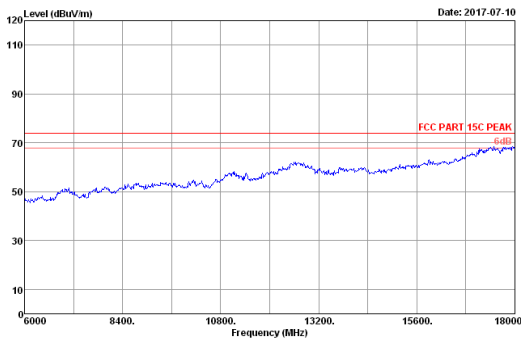


Site no. : 3m Chamber Data no. : 111
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Freq. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5230MHz Tx Mode

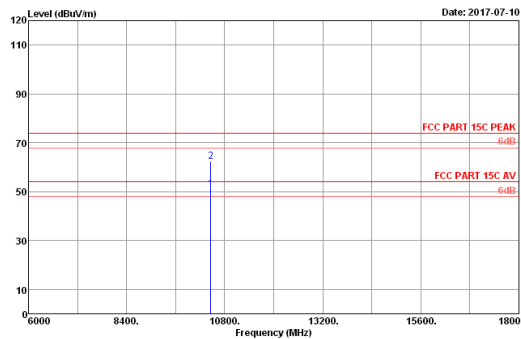


Site no. : 3m Chamber Data no. : 112
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Freq. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5230MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10460.00	38.15	18.08	31.42	36.31	51.34	54.00	2.66	Average
2	10460.00	38.15	18.08	42.35	36.31	62.27	74.00	11.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

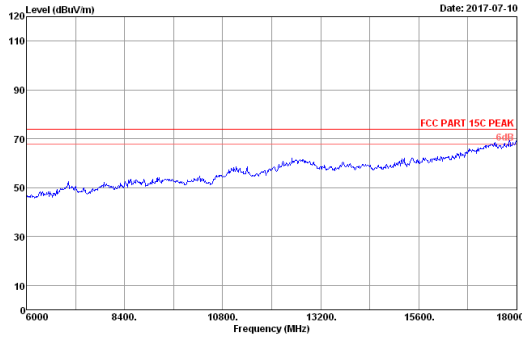


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 113
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5230MHz Tx Mode

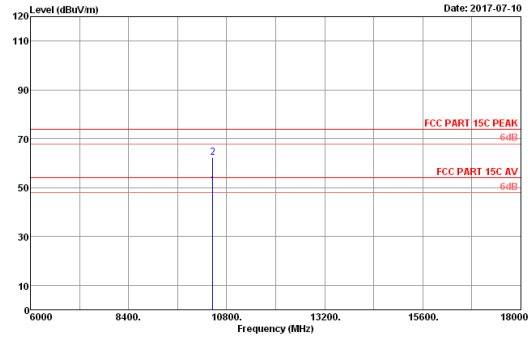

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 114
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5230MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10460.00	38.15	18.08	30.91	36.31	62.49	54.00	3.17	Average
2	10460.00	38.15	18.08	42.57	36.31	78.88	74.00	11.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

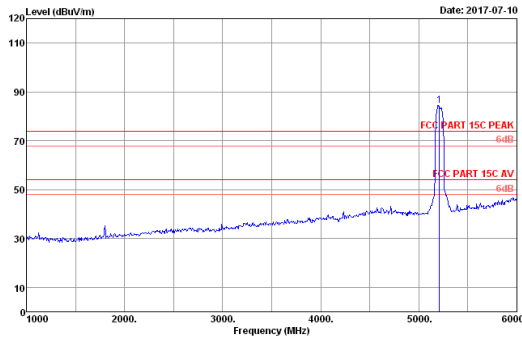

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 119
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 5210MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5210.00	32.45	12.79	74.88	35.61	84.51	74.00	-10.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

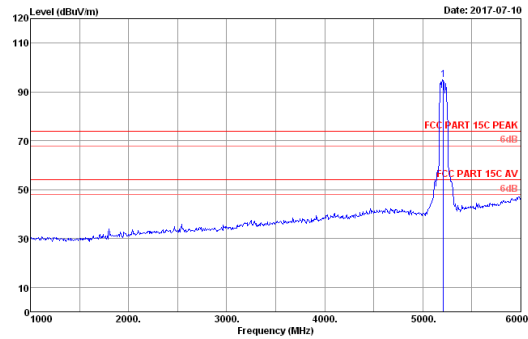


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 120
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 5210MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5210.00	32.45	12.79	85.46	35.61	95.09	74.00	-21.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

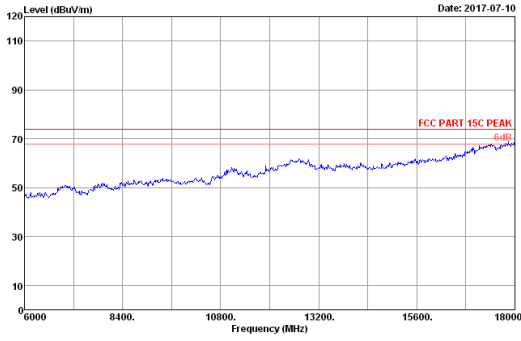


Site no. : 3m Chamber Data no. : 121
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 5210MHz Tx Mode

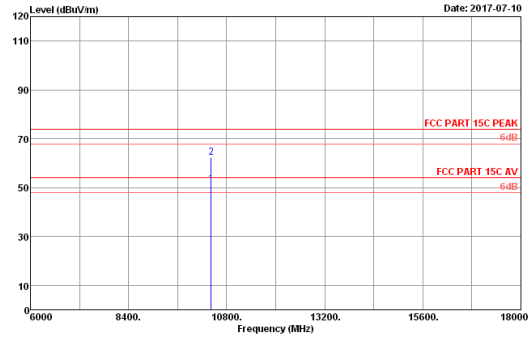


Site no. : 3m Chamber Data no. : 122
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 5210MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.00	38.12	18.11	31.44	36.31	51.36	54.00	2.64	Average
2	10420.00	38.12	18.11	42.62	36.31	62.54	74.00	11.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

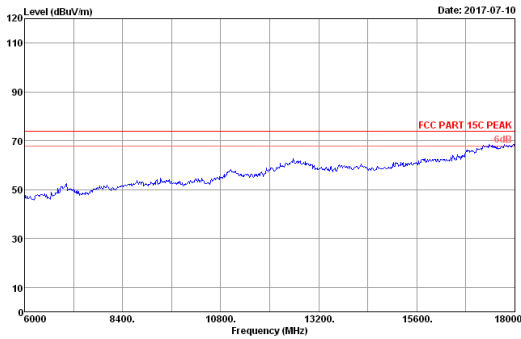

Site no. : 3m Chamber Data no. : 123
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 5210MHz Tx Mode

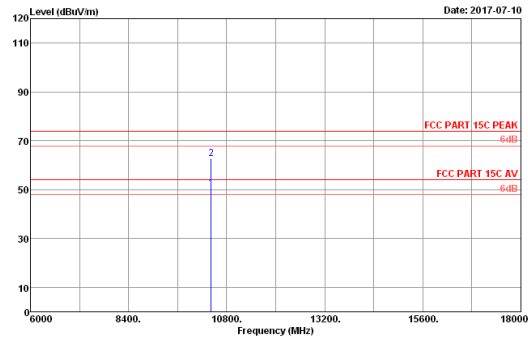


Site no. : 3m Chamber Data no. : 124
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 5210MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.00	38.12	18.11	30.78	36.31	50.70	54.00	3.30	Average
2	10420.00	38.12	18.11	42.64	36.31	62.56	74.00	11.44	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.


**5260-5320MHz Band:
Frequency: 30MHz~1GHz**

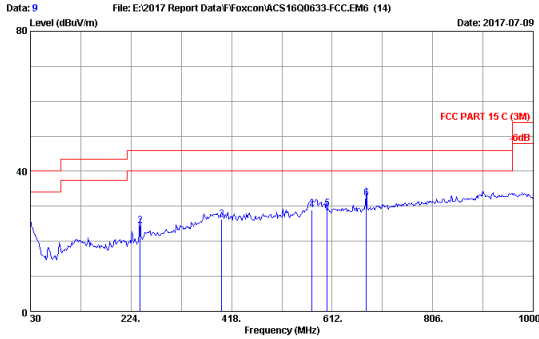

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2017 CBL6112D 35375 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 21.8°C/54% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power rating : AC 120V/60Hz
 Test Mode : WIFI 5G Band2 TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	18.90	6.57	-1.69	23.78	40.00	16.22	QP
2	241.460	12.76	7.55	4.21	24.52	46.00	21.48	QP
3	398.600	16.77	8.22	1.35	26.34	46.00	19.66	QP
4	573.200	18.96	8.86	1.19	29.01	46.00	16.99	QP
5	602.300	19.22	8.97	1.28	29.47	46.00	16.53	QP
6	677.960	19.90	9.44	2.97	32.31	46.00	13.69	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

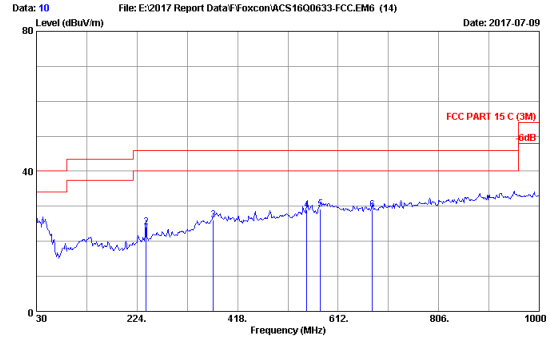


Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2017 CBL6112D 35375 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 21.8°C/54% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power rating : AC 120V/60Hz
 Test Mode : WIFI 5G Band2 TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	18.90	6.57	-0.19	25.28	40.00	14.72	QP
2	241.460	12.76	7.55	3.66	23.97	46.00	22.03	QP
3	371.440	16.07	8.10	1.92	26.09	46.00	19.91	QP
4	551.860	18.76	8.77	1.45	28.98	46.00	17.02	QP
5	578.050	19.00	8.88	1.27	29.15	46.00	16.85	QP
6	677.960	19.90	9.44	-0.32	29.02	46.00	16.98	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Frequency: 1GHz~18GHz

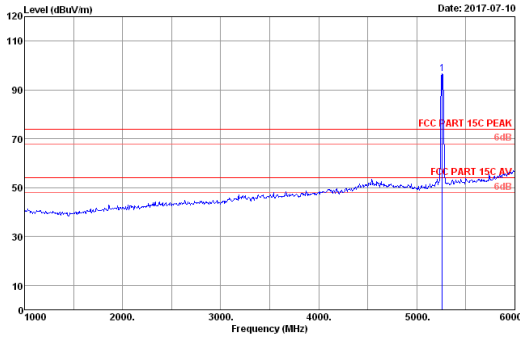

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Emv. / Ins. : 23.14C/52.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5260.00	32.53	12.89	86.86	35.58	96.70	74.00	-22.70	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

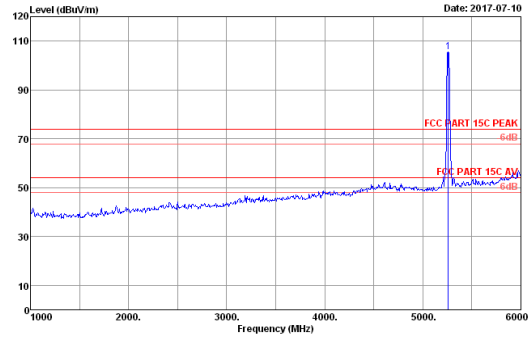

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Emv. / Ins. : 23.14C/52.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5260.00	32.53	12.89	95.89	35.58	105.73	74.00	-31.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

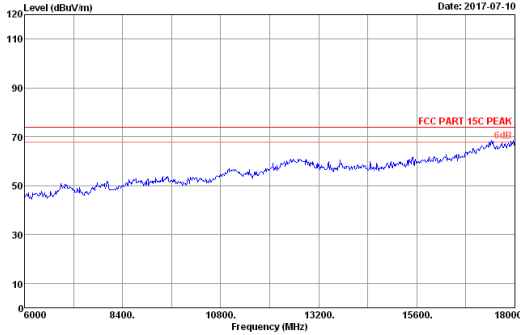

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Emv. / Ins. : 23.14C/52.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10520.00	38.21	18.22	31.30	36.32	51.41	54.00	2.59	Average
2	10520.00	38.21	18.22	42.37	36.32	62.48	74.00	11.52	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

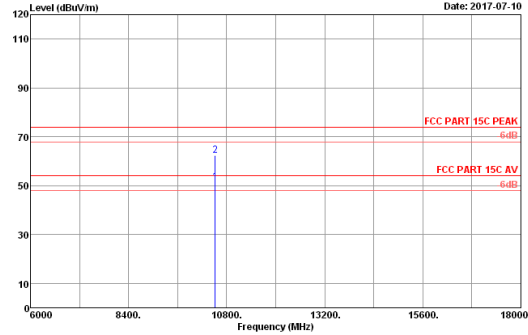


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Emv. / Ins. : 23.14C/52.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10520.00	38.21	18.22	31.30	36.32	51.41	54.00	2.59	Average
2	10520.00	38.21	18.22	42.37	36.32	62.48	74.00	11.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

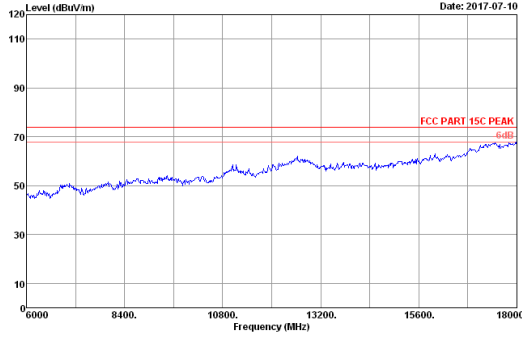


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5260MHz Tx Mode

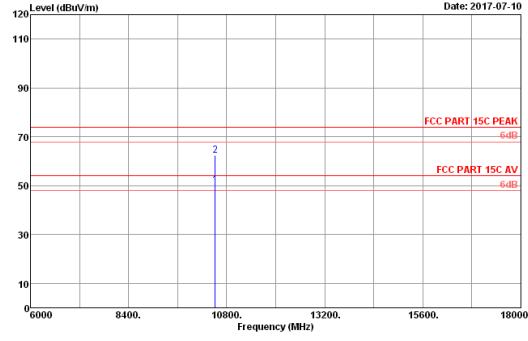

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10620.00	38.21	18.22	30.20	36.32	50.31	54.00	3.69	Average
2	10620.00	38.21	18.22	42.37	36.32	62.48	74.00	11.52	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

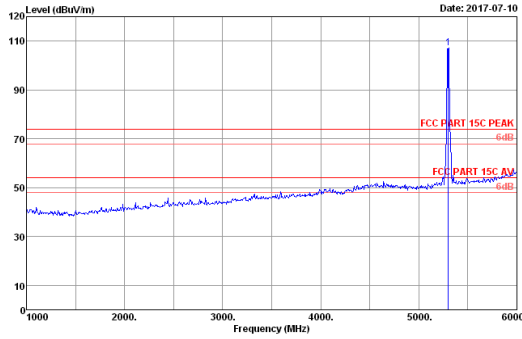

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5300MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5300.00	32.68	12.96	97.09	35.56	107.07	74.00	-33.07	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

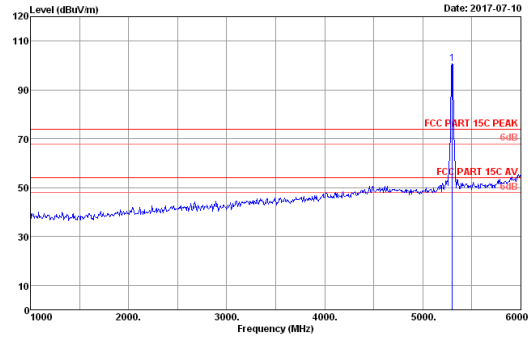


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5300MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5300.00	32.68	12.96	90.84	35.56	100.82	74.00	-26.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

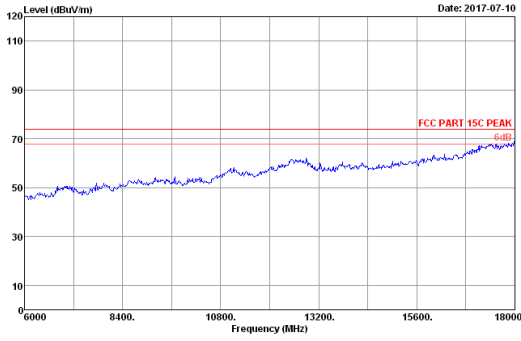


Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5300MHz Tx Mode

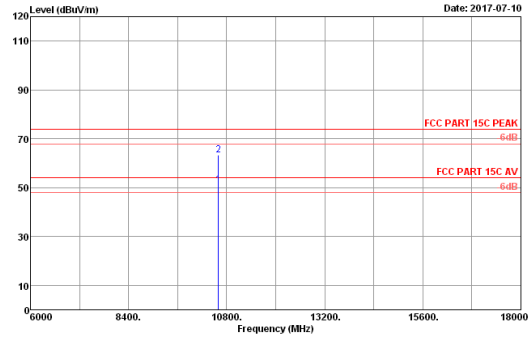


Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5300MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10600.00	38.26	18.88	30.43	36.30	51.27	54.00	2.73	Average
2	10600.00	38.26	18.88	42.51	36.30	63.35	74.00	10.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

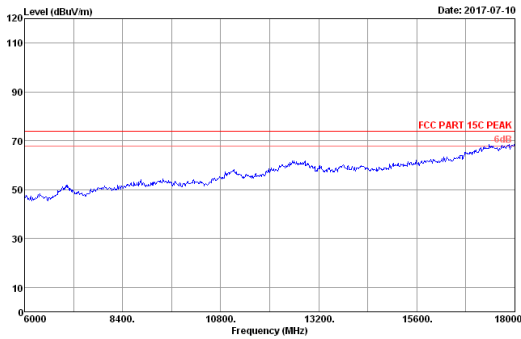


Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5300MHz Tx Mode

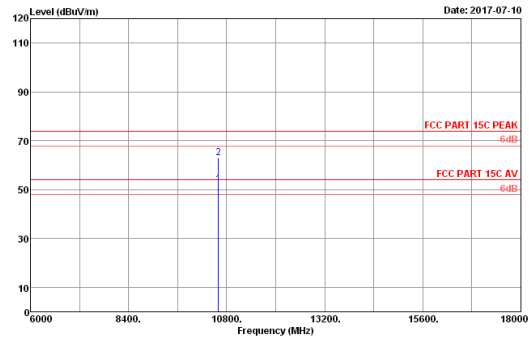

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5300MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10600.00	38.26	18.88	31.27	36.30	52.11	54.00	1.89	Average
2	10600.00	38.26	18.88	42.16	36.30	63.00	74.00	11.00	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

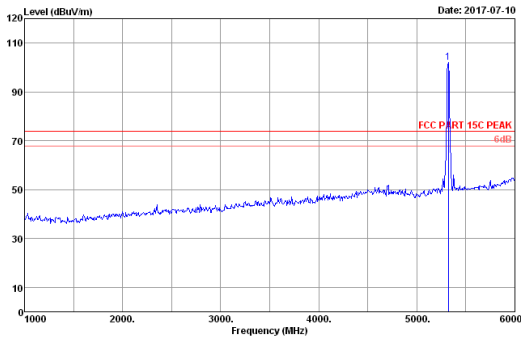

Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5320.00	32.61	12.99	91.99	36.55	102.04	74.00	-28.04	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

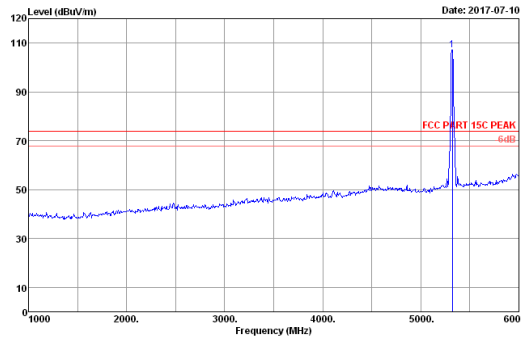


Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5320.00	32.61	12.99	97.26	36.55	107.31	74.00	-33.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

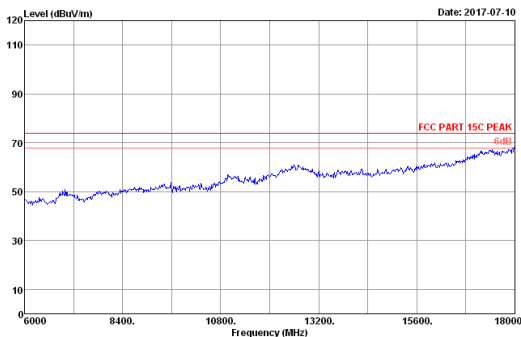


Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5320MHz Tx Mode

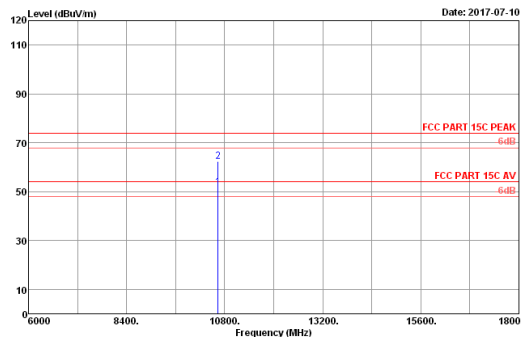


Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10640.00	38.28	19.21	30.52	36.29	51.72	54.00	2.28	Average
2	10640.00	38.28	19.21	41.32	36.29	62.62	74.00	11.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

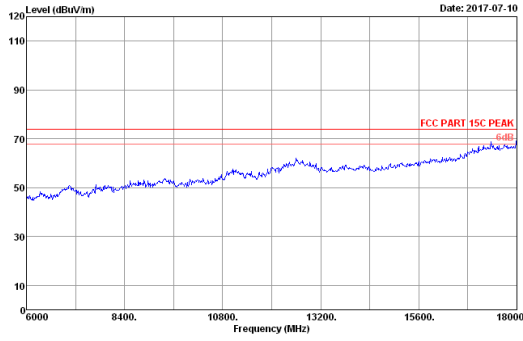


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5320MHz Tx Mode

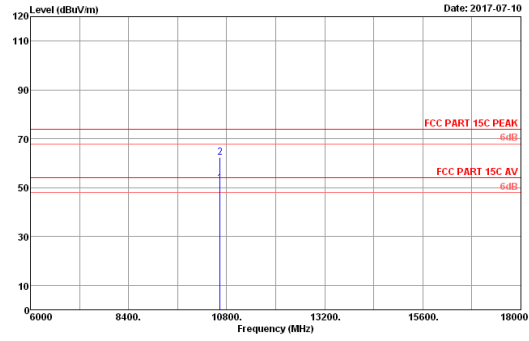

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10640.00	38.28	19.21	30.54	36.29	51.84	54.00	2.16	Average
2	10640.00	38.28	19.21	41.33	36.29	62.63	74.00	11.47	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

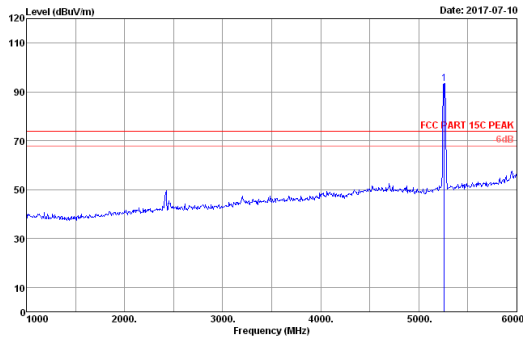

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5260.00	32.53	12.89	63.46	35.58	93.30	74.00	-19.30	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

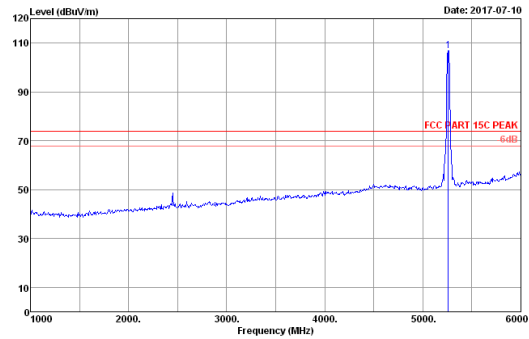


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5260.00	32.53	12.89	97.05	35.58	106.89	74.00	-32.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

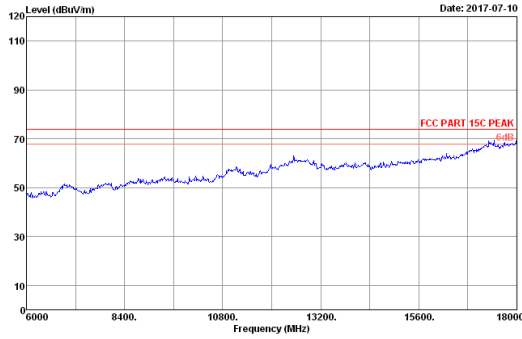


Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 6260MHz Tx Mode

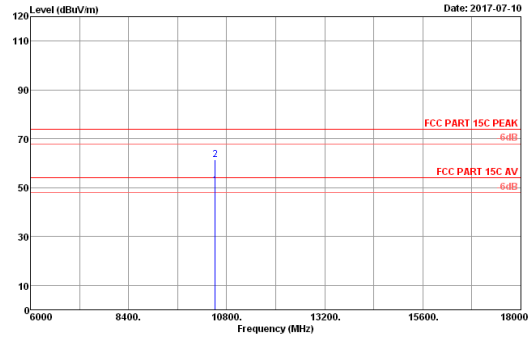


Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 6260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.00	38.21	18.22	30.72	36.32	50.83	54.00	3.17	Average
2	10620.00	38.21	18.22	41.37	36.32	61.48	74.00	12.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

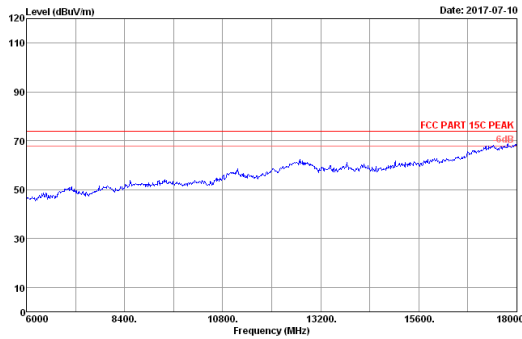


Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 6260MHz Tx Mode

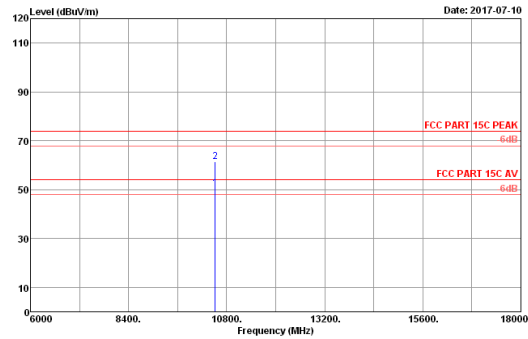

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 6260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.00	38.21	18.22	30.40	36.32	50.51	54.00	3.49	Average
2	10620.00	38.21	18.22	41.29	36.32	61.40	74.00	12.60	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

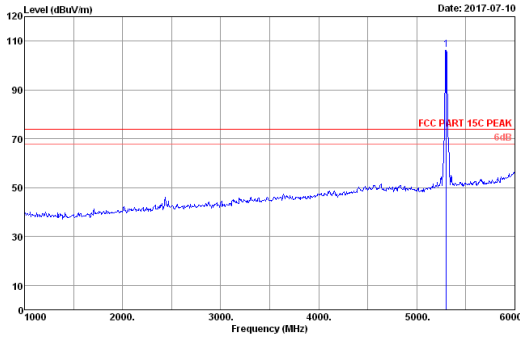

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEB802.11n HT20 5300MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	5300.00	32.68	12.96	96.45	35.56	106.43	74.00	-32.43	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

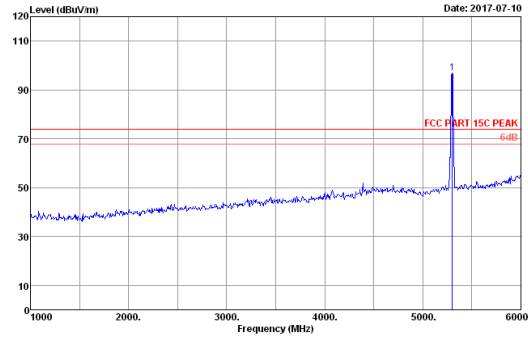


Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEB802.11n HT20 5300MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	5300.00	32.68	12.96	86.88	35.56	96.86	74.00	-22.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

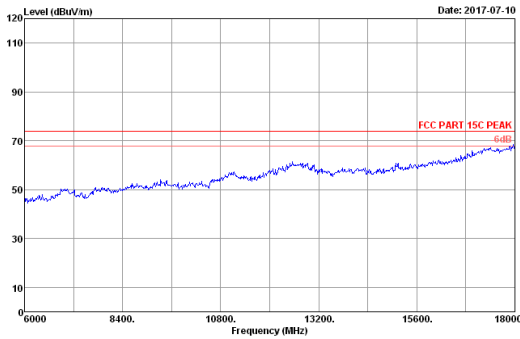


Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEB802.11n HT20 5300MHz Tx Mode

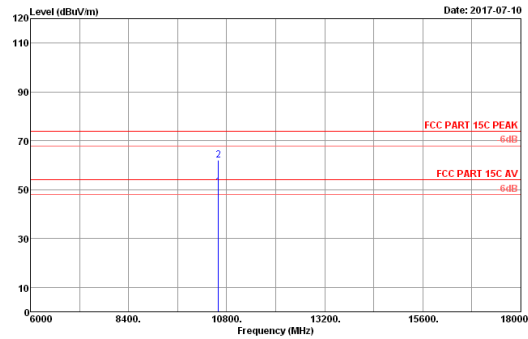


Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEB802.11n HT20 5300MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	10600.00	38.26	18.88	30.29	36.30	51.12	54.00	2.88	Average
2	10600.00	38.26	18.88	41.31	36.30	62.15	74.00	11.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

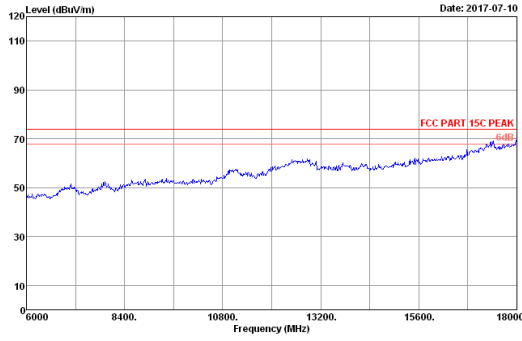


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 41
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Freq. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5300MHz Tx Mode

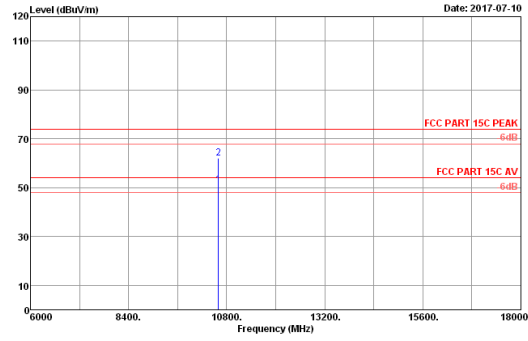

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Freq. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5300MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10600.00	38.26	18.88	30.26	36.30	51.10	54.00	2.90	Average
2	10600.00	38.26	18.88	41.34	36.30	62.18	74.00	11.82	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

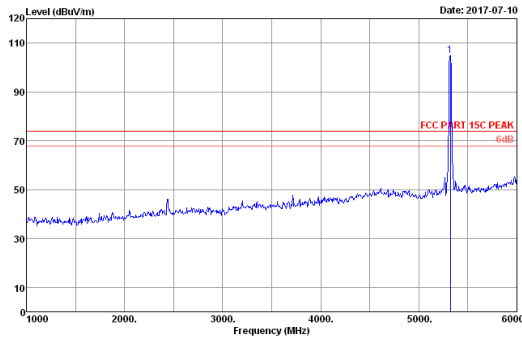

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 43
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Freq. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5320.00	32.61	12.99	94.95	35.55	105.00	74.00	-31.00	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

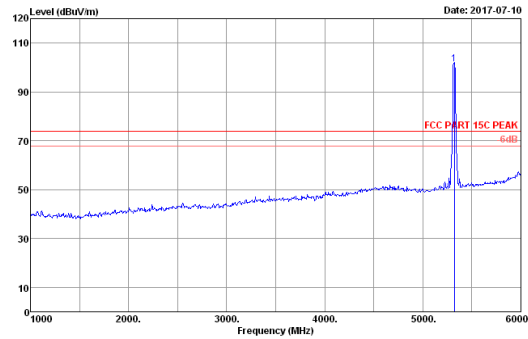


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. Freq. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5320.00	32.61	12.99	91.42	35.55	101.47	74.00	-27.47	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

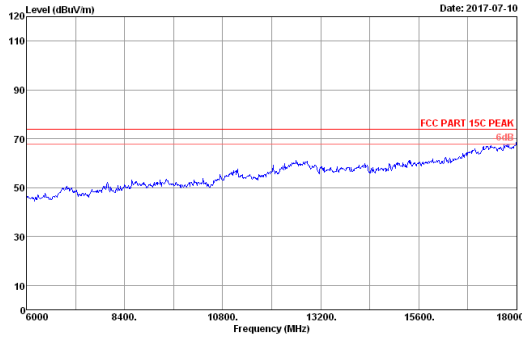


Site no. : 3m Chamber Data no. : 45
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5320MHz Tx Mode

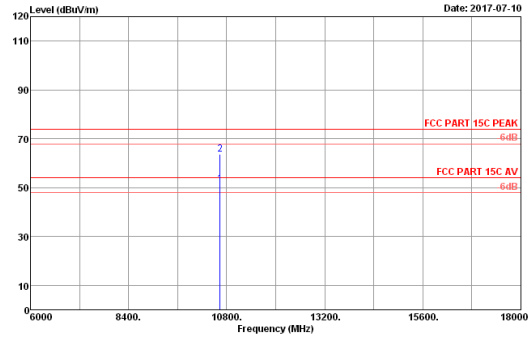


Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading Level (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.00	38.28	19.21	30.17	36.29	51.37	54.00	2.63	Average
2	10640.00	38.28	19.21	42.34	36.29	63.54	74.00	10.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

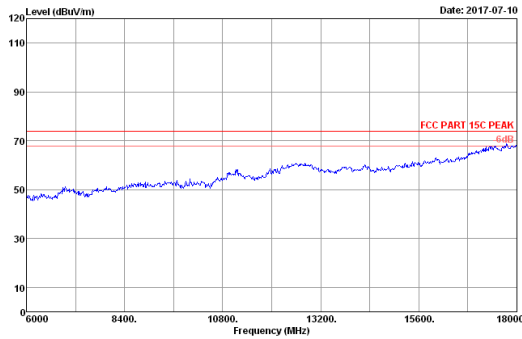


Site no. : 3m Chamber Data no. : 47
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5320MHz Tx Mode

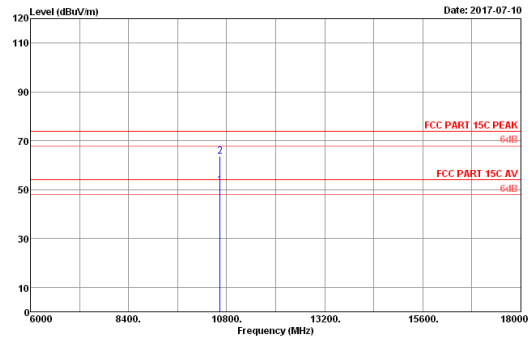

Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading Level (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.00	38.28	19.21	30.54	36.29	51.74	54.00	2.26	Average
2	10640.00	38.28	19.21	42.51	36.29	63.71	74.00	10.29	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

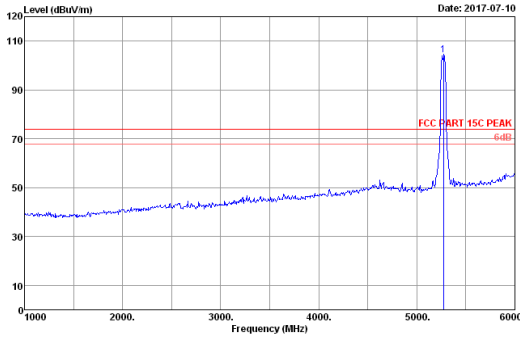

Site no. : 3m Chamber Data no. : 53
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5270MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5270.00	32.53	12.89	94.60	35.57	104.45	74.00	-30.45	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

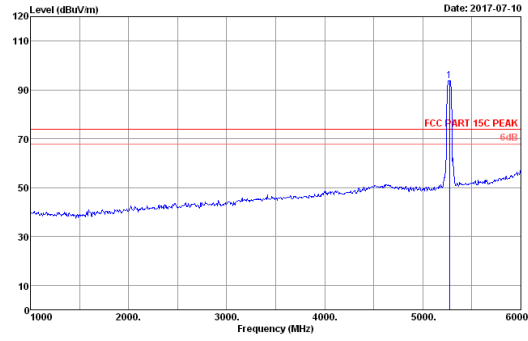


Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5270MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5270.00	32.53	12.89	84.01	35.57	93.86	74.00	-19.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

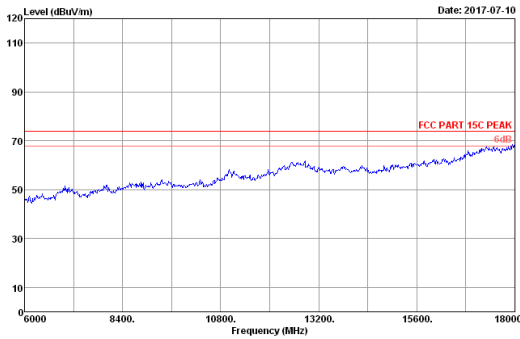


Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5270MHz Tx Mode

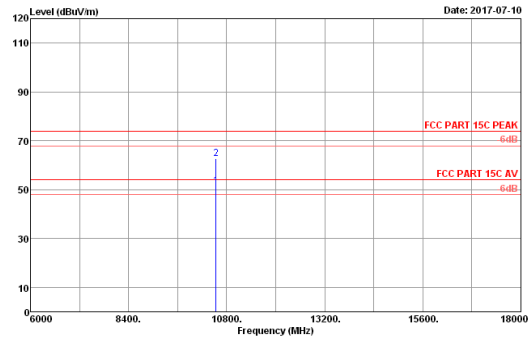


Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5270MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10640.00	38.22	18.39	31.07	36.31	51.37	54.00	2.63	Average
2	10640.00	38.22	18.39	42.36	36.31	62.66	74.00	11.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

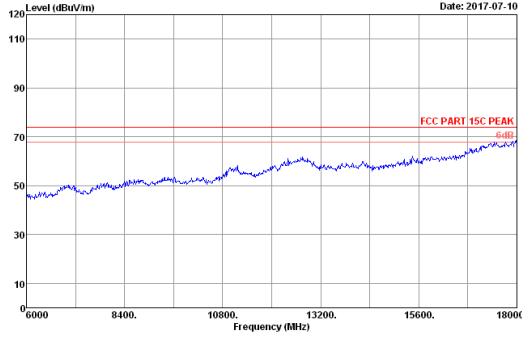


Site no. : 3m Chamber Data no. : 57
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5270MHz Tx Mode

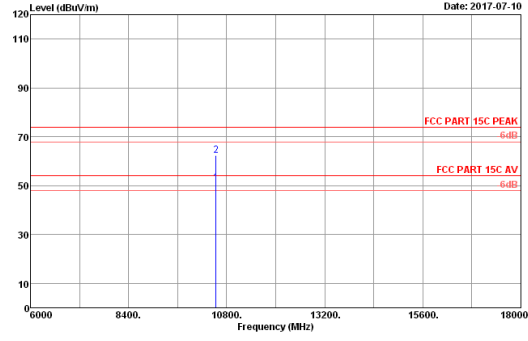

Site no. : 3m Chamber Data no. : 58
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5270MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10640.00	38.22	18.39	30.79	36.31	51.09	54.00	2.91	Average
2	10640.00	38.22	18.39	42.16	36.31	62.46	74.00	11.54	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

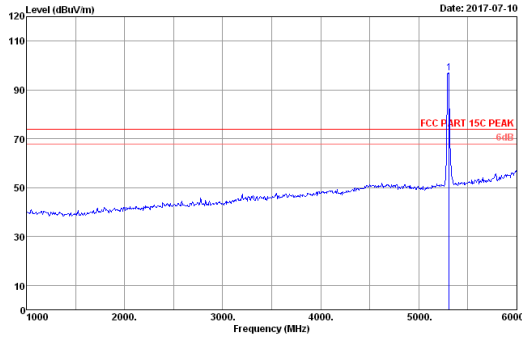

Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5310MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5310.00	32.61	12.96	66.87	35.55	96.89	74.00	-22.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

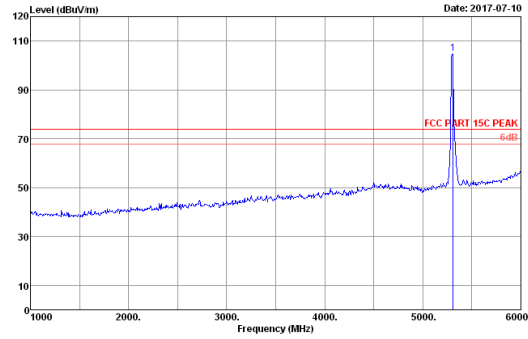


Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5310MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5310.00	32.61	12.96	94.80	35.55	104.82	74.00	-30.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

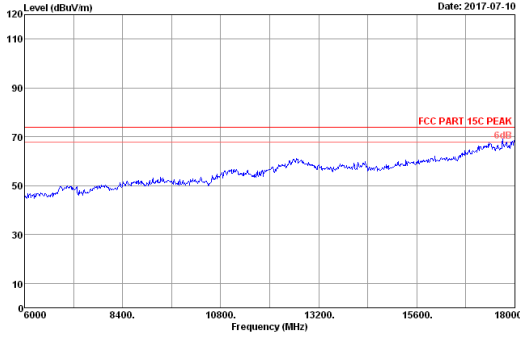


Site no. : 3m Chamber Data no. : 65
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5310MHz Tx Mode

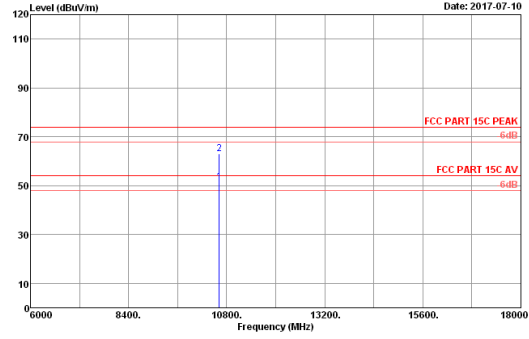


Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5310MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.00	38.27	19.04	30.37	36.29	51.39	54.00	2.61	Average
2	10620.00	38.27	19.04	42.15	36.29	63.17	74.00	10.83	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

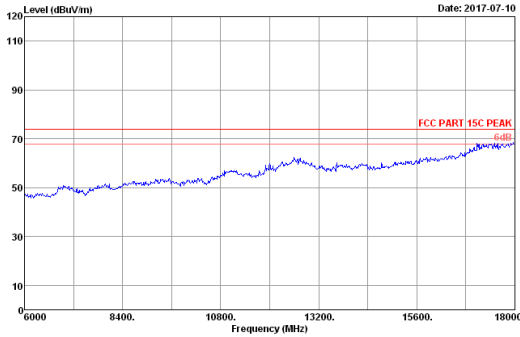


Site no. : 3m Chamber Data no. : 67
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5310MHz Tx Mode

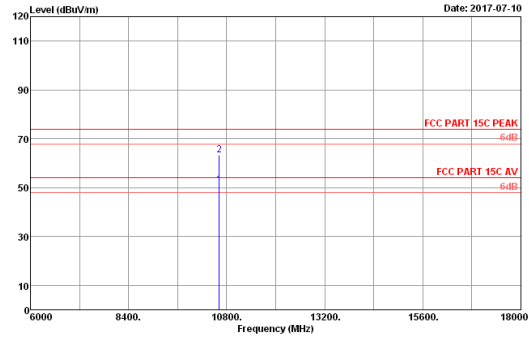

Site no. : 3m Chamber Data no. : 68
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5310MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.00	38.27	19.04	30.17	36.29	51.19	54.00	2.81	Average
2	10620.00	38.27	19.04	42.35	36.29	63.37	74.00	10.63	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

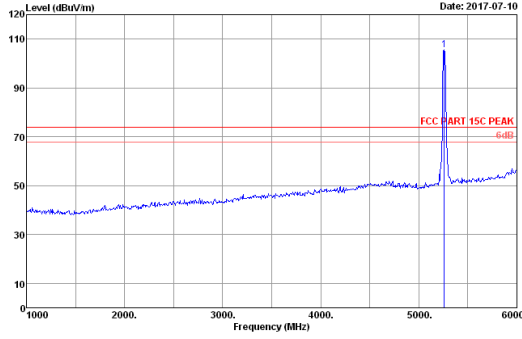

Site no. : 3m Chamber Data no. : 73
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	5260.00	32.53	12.89	95.77	35.58	105.61	74.00	-31.61	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

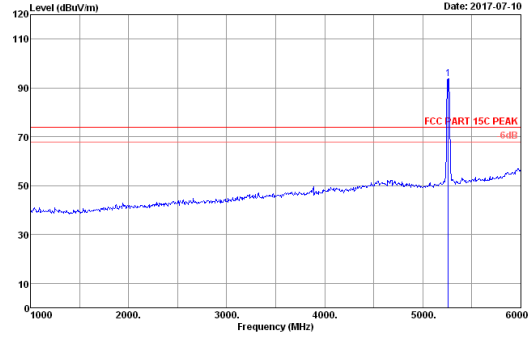


Site no. : 3m Chamber Data no. : 74
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	5260.00	32.53	12.89	83.90	35.58	93.74	74.00	-19.74	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

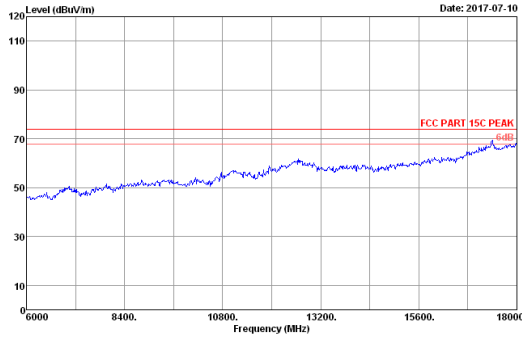


Site no. : 3m Chamber Data no. : 75
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5260MHz Tx Mode

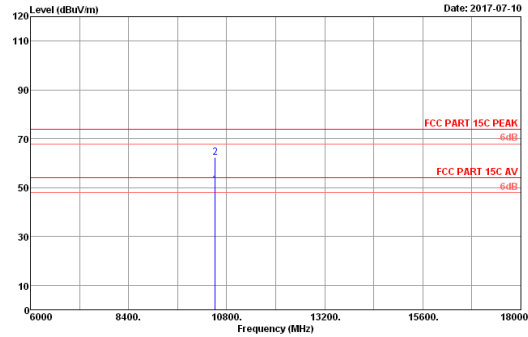


Site no. : 3m Chamber Data no. : 76
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	10820.00	38.21	18.22	31.06	36.32	51.17	54.00	2.83	Average
2	10820.00	38.21	18.22	42.38	36.32	62.49	74.00	11.51	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

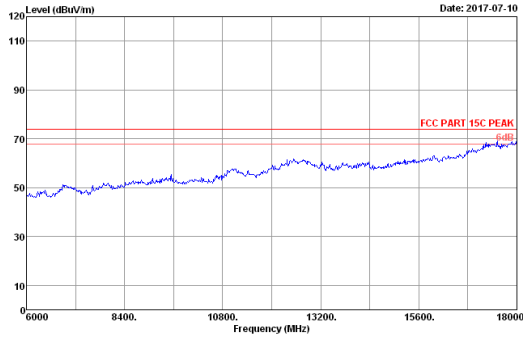


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 77
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. pre : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5260MHz Tx Mode

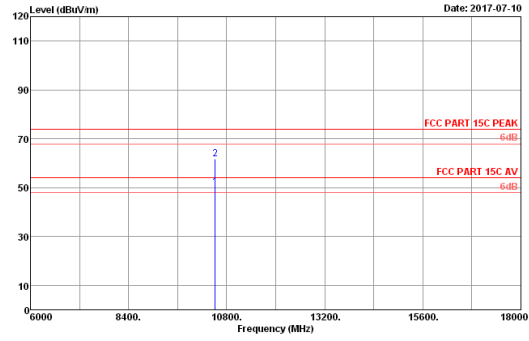

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 78
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. pre : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10820.00	38.21	18.22	30.04	36.32	50.16	54.00	3.85	Average
2	10820.00	38.21	18.22	41.65	36.32	61.76	74.00	12.24	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

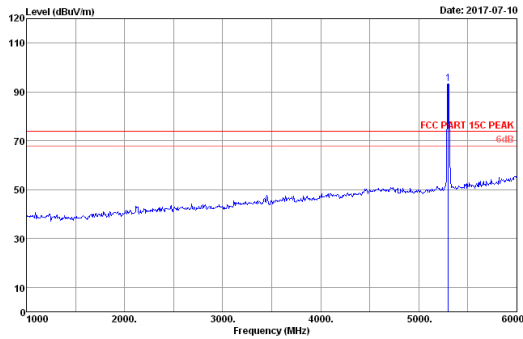

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 83
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. pre : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5300MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5300.00	32.68	12.96	63.55	35.56	93.53	74.00	-19.53	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

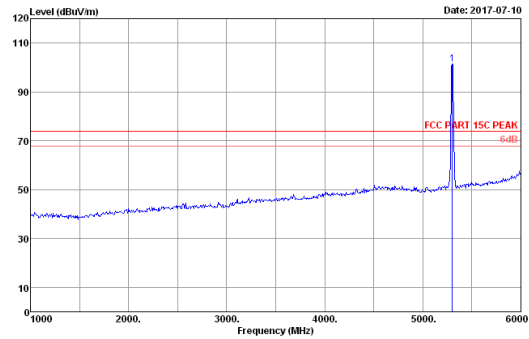


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 84
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. pre : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5300MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5300.00	32.68	12.96	91.57	35.56	101.55	74.00	-27.55	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

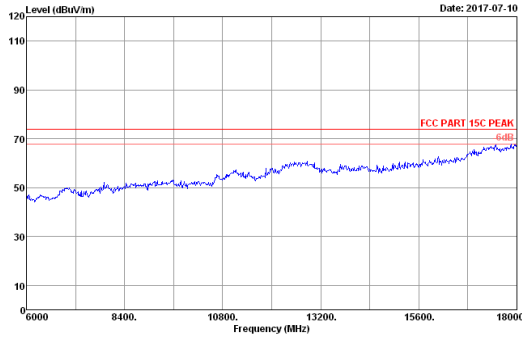


Site no. : 3m Chamber Data no. : 85
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5300MHz Tx Mode

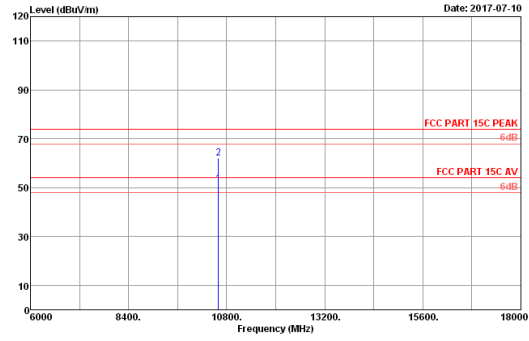


Site no. : 3m Chamber Data no. : 86
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5300MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10600.00	38.26	18.88	30.54	36.30	51.38	54.00	2.62	Average
2	10600.00	38.26	18.88	41.31	36.30	62.16	74.00	11.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

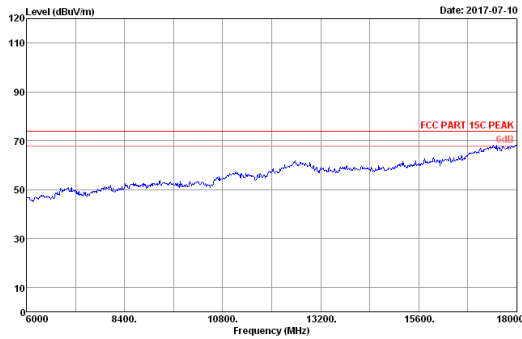


Site no. : 3m Chamber Data no. : 87
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5300MHz Tx Mode

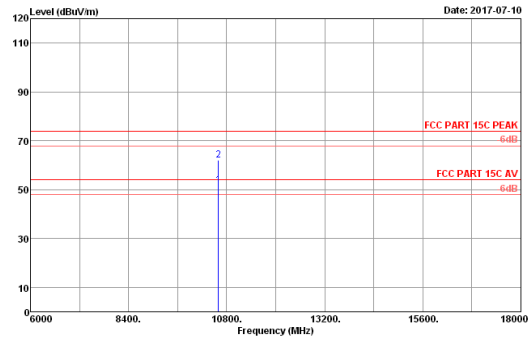

Site no. : 3m Chamber Data no. : 88
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5300MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10600.00	38.26	18.88	31.07	36.30	51.91	54.00	2.09	Average
2	10600.00	38.26	18.88	41.28	36.30	62.12	74.00	11.88	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

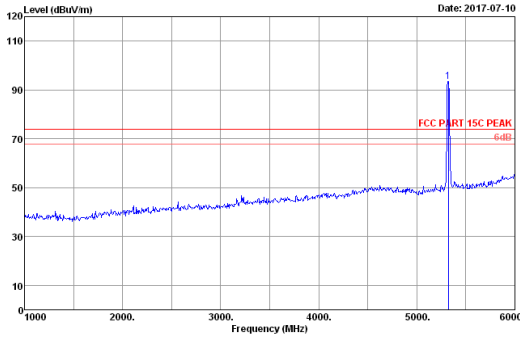

Site no. : 3m Chamber Data no. : 89
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5320.00	32.61	12.99	83.26	36.55	93.31	74.00	-19.31	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

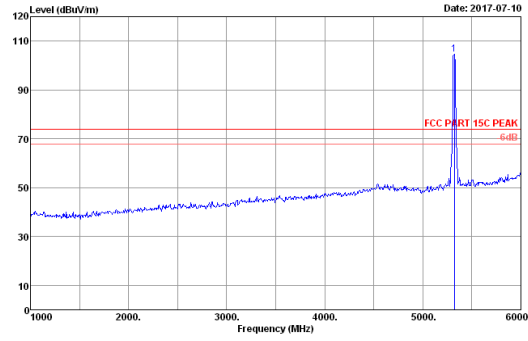


Site no. : 3m Chamber Data no. : 90
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5320.00	32.61	12.99	94.59	36.55	104.64	74.00	-30.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

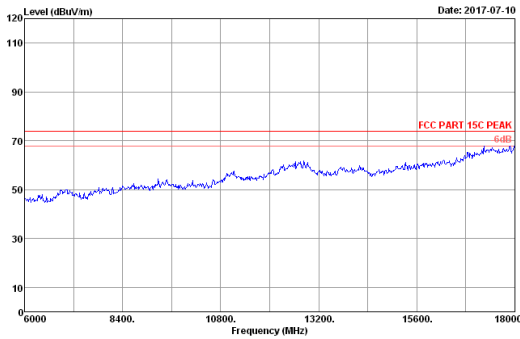


Site no. : 3m Chamber Data no. : 91
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5320MHz Tx Mode

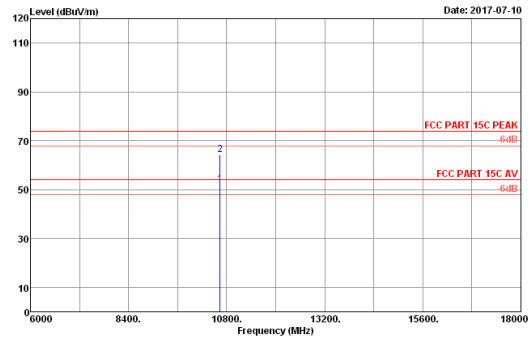


Site no. : 3m Chamber Data no. : 92
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10640.00	38.28	19.21	31.07	36.29	52.27	54.00	1.73	Average
2	10640.00	38.28	19.21	43.19	36.29	64.39	74.00	9.61	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

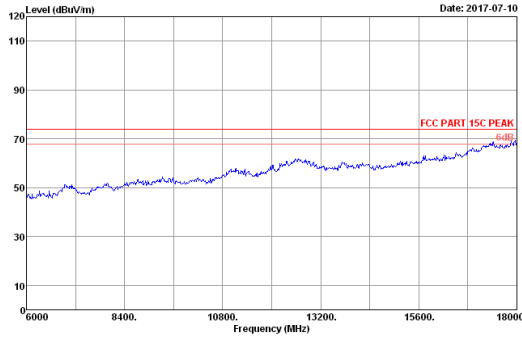


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 93
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5320MHz Tx Mode

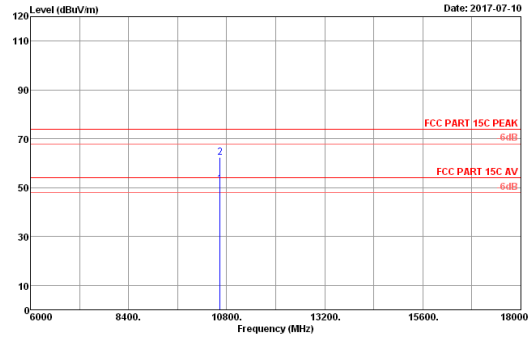

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 94
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10840.00	38.28	19.21	30.47	36.29	51.67	54.00	2.33	Average
2	10840.00	38.28	19.21	41.36	36.29	62.56	74.00	11.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

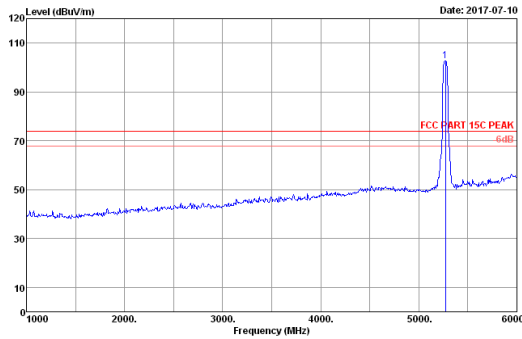

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 99
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5270MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5270.00	32.53	12.89	92.97	35.57	102.82	74.00	-28.82	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

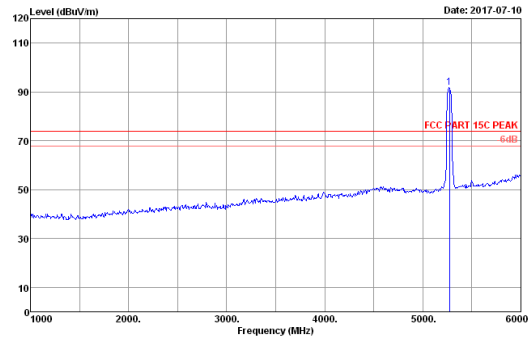


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5270MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5270.00	32.53	12.89	81.89	35.57	91.74	74.00	-17.74	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

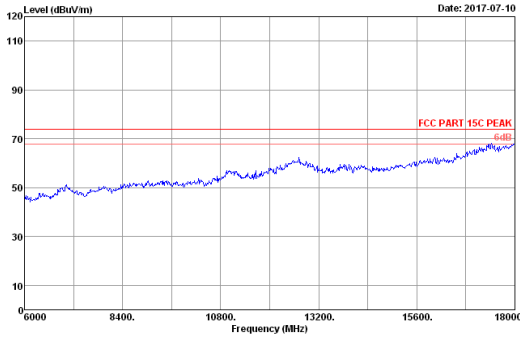


Site no. : 3m Chamber Data no. : 101
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5270MHz Tx Mode

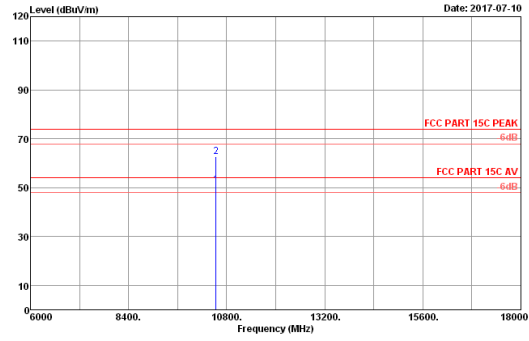


Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5270MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10640.00	38.22	18.39	31.06	36.31	51.36	54.00	2.64	Average
2	10640.00	38.22	18.39	42.35	36.31	62.65	74.00	11.35	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

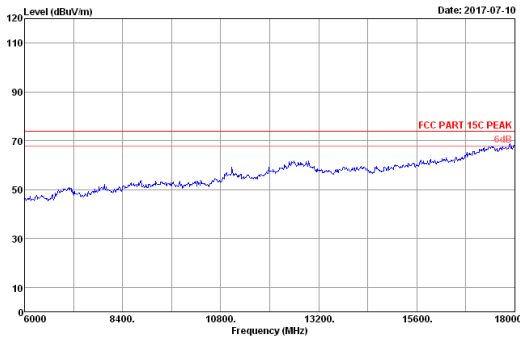


Site no. : 3m Chamber Data no. : 103
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5270MHz Tx Mode

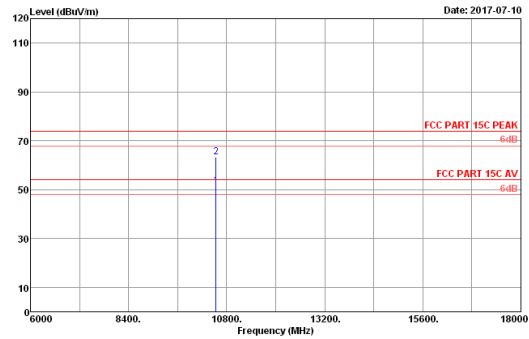

Site no. : 3m Chamber Data no. : 104
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5270MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10640.00	38.22	18.39	31.12	36.31	51.42	54.00	2.58	Average
2	10640.00	38.22	18.39	43.16	36.31	63.46	74.00	10.54	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

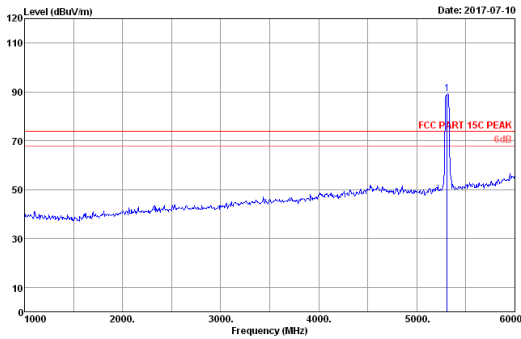

Site no. : 3m Chamber Data no. : 109
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5310MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5310.00	32.61	12.96	79.32	36.55	89.34	74.00	-15.34	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

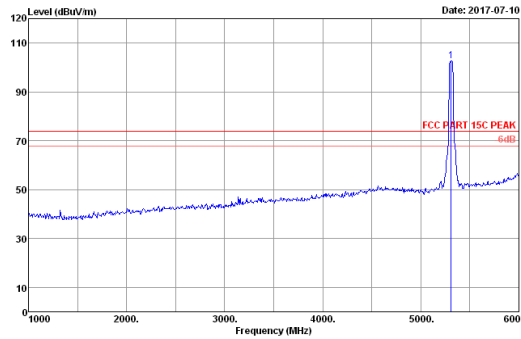

Site no. : 3m Chamber Data no. : 110
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5310MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5310.00	32.61	12.96	92.81	36.55	102.83	74.00	-28.83	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

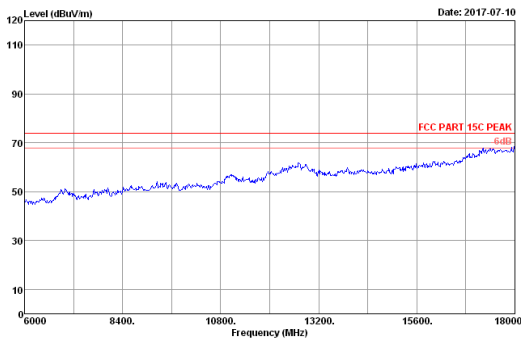

Site no. : 3m Chamber Data no. : 111
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5310MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10620.00	38.27	19.04	30.14	36.29	51.16	54.00	2.84	Average
2	10620.00	38.27	19.04	42.33	36.29	63.35	74.00	10.65	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

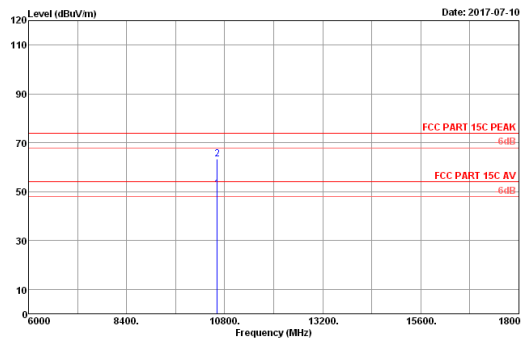


Site no. : 3m Chamber Data no. : 112
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5310MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10620.00	38.27	19.04	30.14	36.29	51.16	54.00	2.84	Average
2	10620.00	38.27	19.04	42.33	36.29	63.35	74.00	10.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

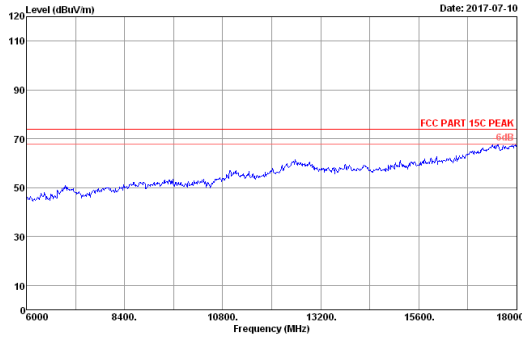


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 113
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5310MHz Tx Mode

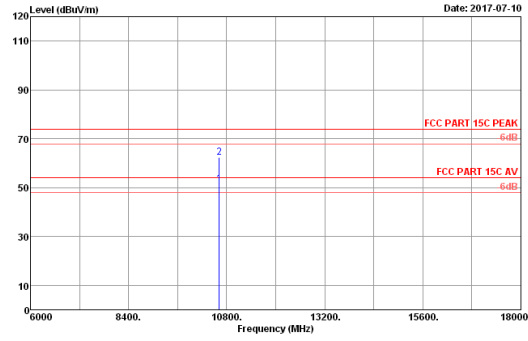

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 114
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5310MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10620.00	38.27	19.04	30.59	36.29	51.61	54.00	2.39	Average
2	10620.00	38.27	19.04	41.37	36.29	62.39	74.00	11.61	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

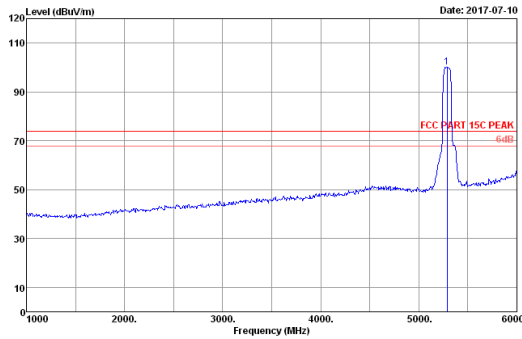

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 119
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5290MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5290.00	32.55	12.92	90.40	35.56	100.31	74.00	-26.31	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

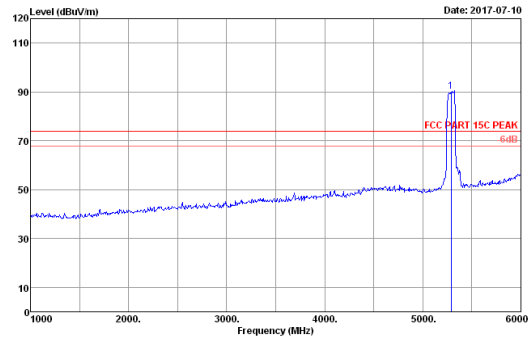


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 120
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5290MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5290.00	32.55	12.92	80.36	35.56	90.27	74.00	-16.27	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

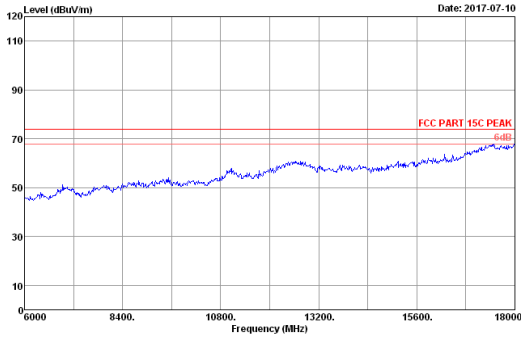


Site no. : 3m Chamber Data no. : 121
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 5290MHz Tx Mode

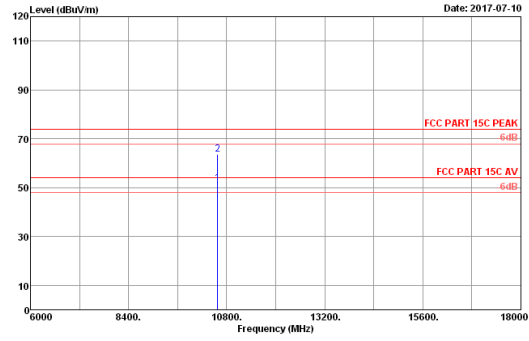


Site no. : 3m Chamber Data no. : 122
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 5290MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading Level (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10880.00	38.25	18.71	31.28	36.30	51.94	54.00	2.06	Average
2	10880.00	38.25	18.71	43.16	36.30	63.82	74.00	10.18	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

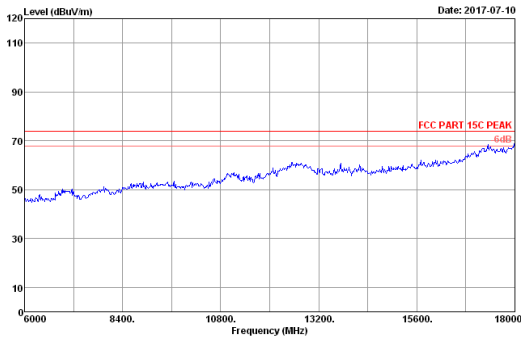

Site no. : 3m Chamber Data no. : 123
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 5290MHz Tx Mode

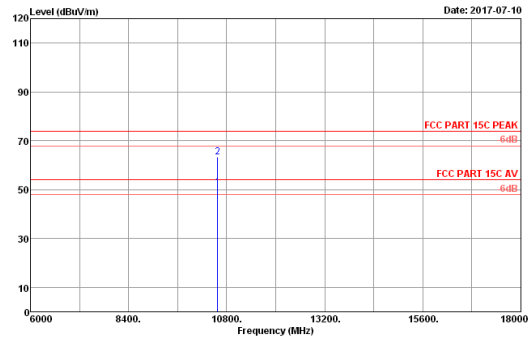


Site no. : 3m Chamber Data no. : 124
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 5290MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading Level (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	10880.00	38.25	18.71	30.16	36.30	50.82	54.00	3.18	Average
2	10880.00	38.25	18.71	42.58	36.30	63.24	74.00	10.76	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

**5500-5700MHz Band:
Frequency: 30MHz~1GHz**

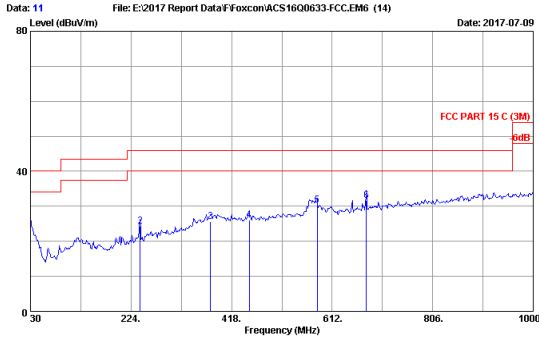


Data: 11 File: E:2017 Report Data\Foxcom\ACS1600633-FCC.EM6 (14) Date: 2017-07-09

Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m 2017 CBL6112D 35375 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 21.8°C/54% Engineer : Garry
 EUT : Cash Register N/H:SPB1-01
 Power rating : AC 120V/60Hz
 Test Mode : WIFI 5G Band3 TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	18.90	6.57	-0.96	24.51	40.00	15.49	QP
2	241.460	12.76	7.55	3.90	24.21	46.00	21.79	QP
3	377.260	16.22	8.12	1.25	25.59	46.00	20.41	QP
4	451.950	17.58	8.40	0.18	26.16	46.00	19.84	QP
5	582.900	19.04	8.89	2.48	30.41	46.00	15.59	QP
6	677.960	19.90	9.44	2.28	31.62	46.00	14.38	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

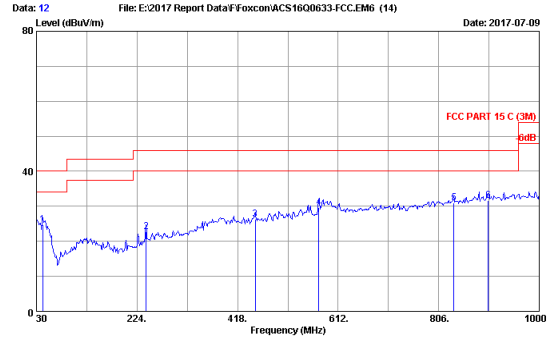


Data: 12 File: E:2017 Report Data\Foxcom\ACS1600633-FCC.EM6 (14) Date: 2017-07-09

Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2017 CBL6112D 35375 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 21.8°C/54% Engineer : Garry
 EUT : Cash Register N/H:SPB1-01
 Power rating : AC 120V/60Hz
 Test Mode : WIFI 5G Band3 TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	41.640	13.62	6.61	4.61	24.84	40.00	15.16	QP
2	241.460	12.76	7.55	2.46	22.77	46.00	23.23	QP
3	451.950	17.58	8.40	0.34	26.32	46.00	19.68	QP
4	575.140	18.97	8.86	1.81	29.64	46.00	16.36	QP
5	895.100	21.38	10.07	-0.55	30.90	46.00	15.10	QP
6	902.030	21.91	10.43	-0.66	31.68	46.00	14.32	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Frequency: 1GHz~18GHz

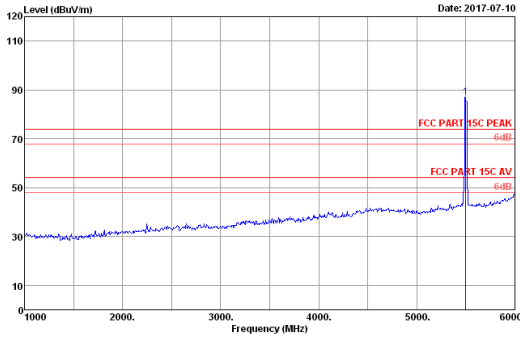

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Emv. / Ins. : 23.14C/52.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5500.00	32.90	13.29	76.21	35.45	86.95	74.00	-12.95	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

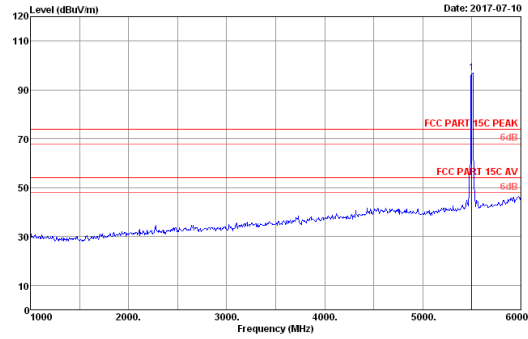

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Emv. / Ins. : 23.14C/52.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5500.00	32.90	13.29	86.19	35.45	96.93	74.00	-22.93	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

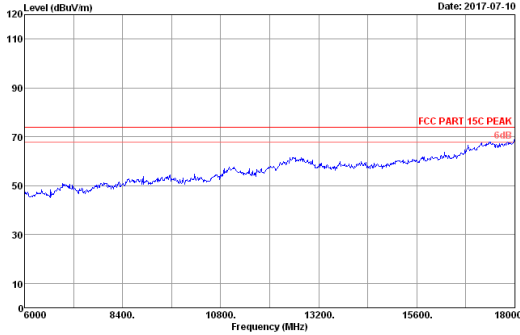

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Emv. / Ins. : 23.14C/52.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11000.00	38.50	22.15	28.13	36.21	52.57	54.00	1.43	Average
2	11000.00	38.50	22.15	43.35	36.21	67.79	74.00	6.21	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

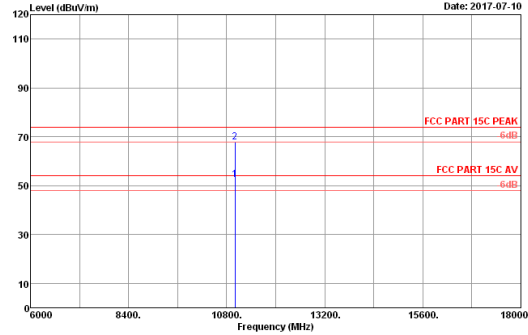


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Emv. / Ins. : 23.14C/52.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11000.00	38.50	22.15	28.13	36.21	52.57	54.00	1.43	Average
2	11000.00	38.50	22.15	43.35	36.21	67.79	74.00	6.21	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

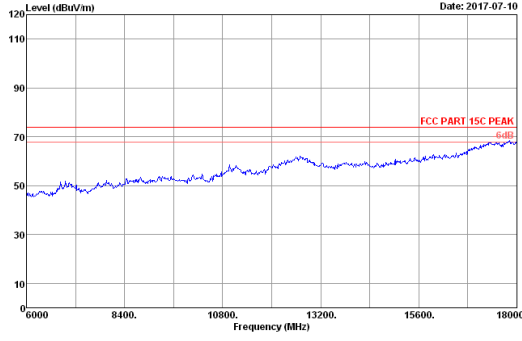


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5500MHz Tx Mode

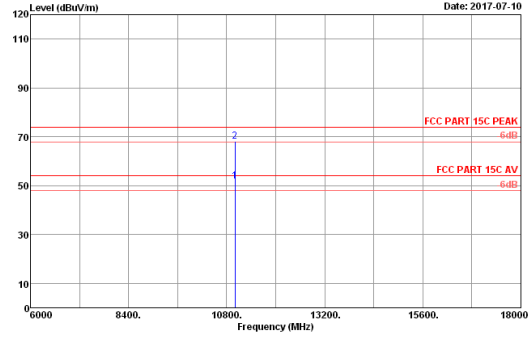

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11000.00	38.50	22.15	21.36	36.21	51.80	54.00	2.20	Average
2	11000.00	38.50	22.15	43.65	36.21	68.09	74.00	5.91	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

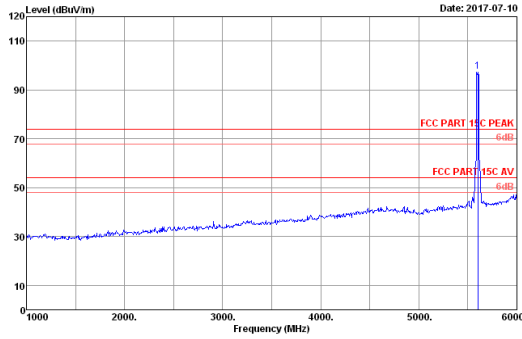

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5600MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5600.00	33.71	13.27	65.99	35.45	97.52	74.00	-23.52	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

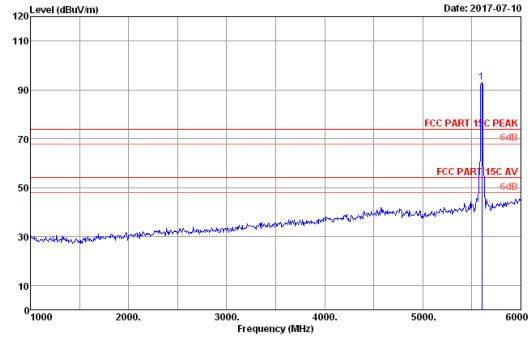


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5600MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5600.00	33.71	13.27	61.67	35.45	93.20	74.00	-19.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

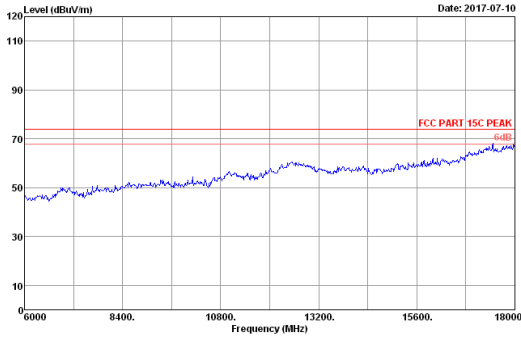


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5600MHz Tx Mode

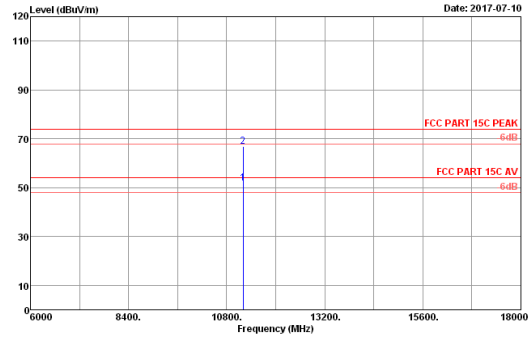


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5600MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11200.00	38.38	21.23	28.24	35.86	51.99	54.00	2.01	Average
2	11200.00	38.38	21.23	43.26	35.86	67.01	74.00	6.99	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

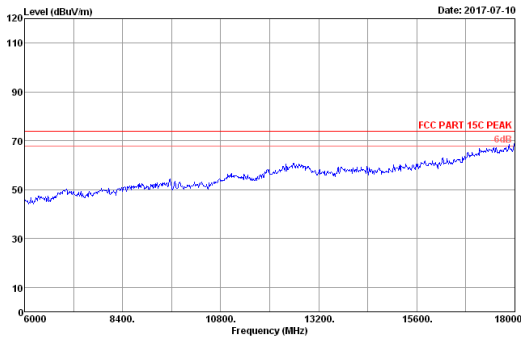


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5600MHz Tx Mode

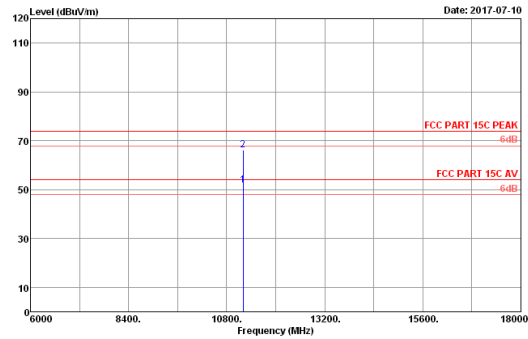

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5600MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11200.00	38.38	21.23	28.19	35.86	51.93	54.00	2.07	Average
2	11200.00	38.38	21.23	42.35	35.86	66.10	74.00	7.90	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

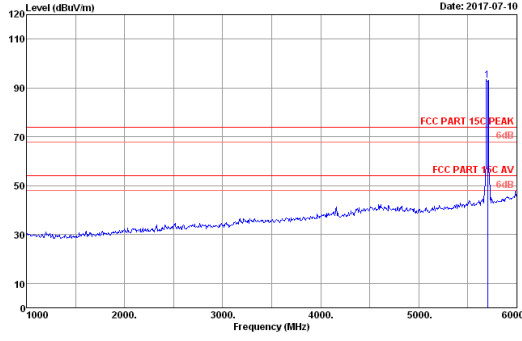

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. pol. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5700MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5700.00	34.38	13.25	81.10	35.45	93.28	74.00	-19.28	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

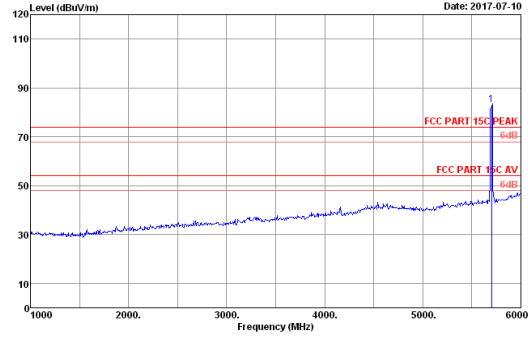


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. pol. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5700MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5700.00	34.38	13.25	71.11	35.45	83.29	74.00	-9.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

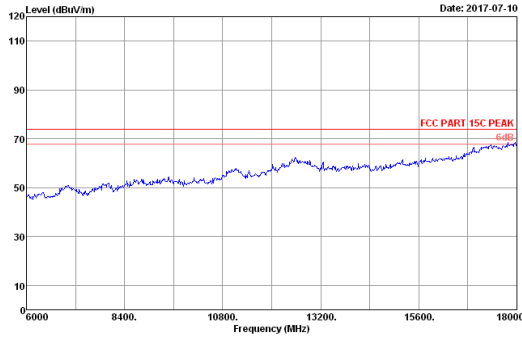


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. pol. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5700MHz Tx Mode

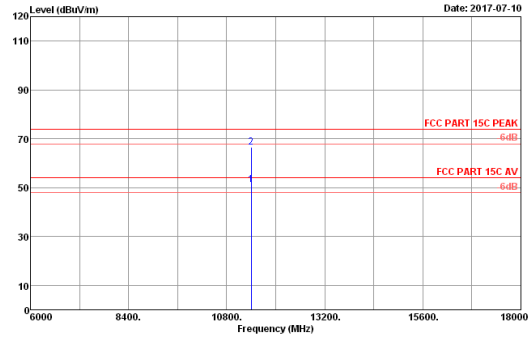


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. pol. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5700MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11400.00	38.26	20.31	28.15	35.51	51.21	54.00	2.79	Average
2	11400.00	38.26	20.31	43.65	35.51	66.71	74.00	7.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

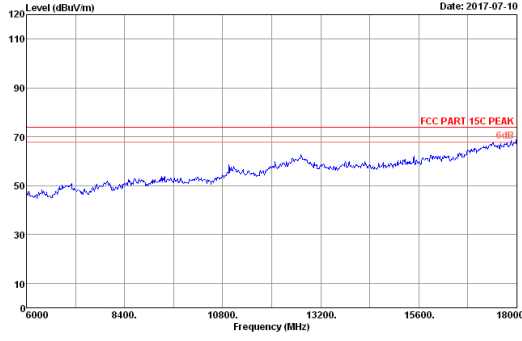


Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5700MHz Tx Mode

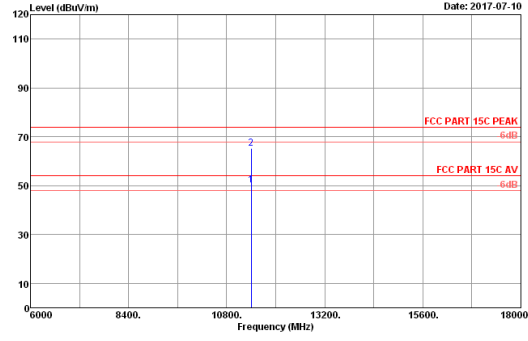

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5700MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11400.00	38.26	20.31	27.34	35.51	50.40	54.00	3.60	Average
2	11400.00	38.26	20.31	42.16	35.51	65.22	74.00	8.78	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

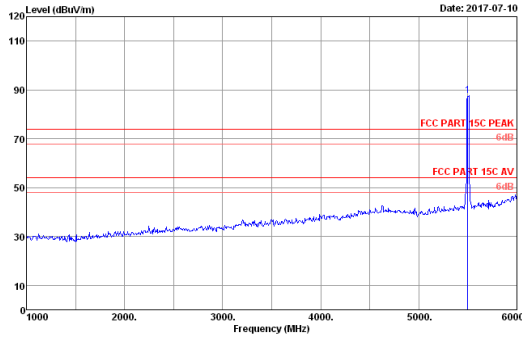

Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5500.00	32.90	13.29	76.81	35.45	87.55	74.00	-13.55	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

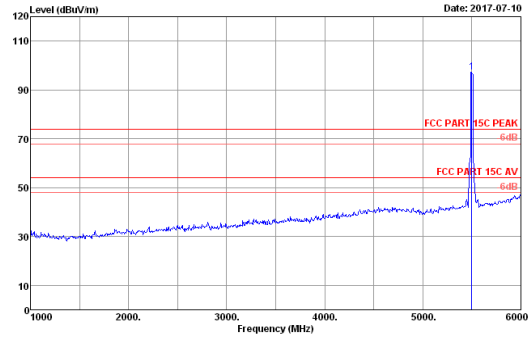


Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5500.00	32.90	13.29	86.64	35.45	97.38	74.00	-23.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

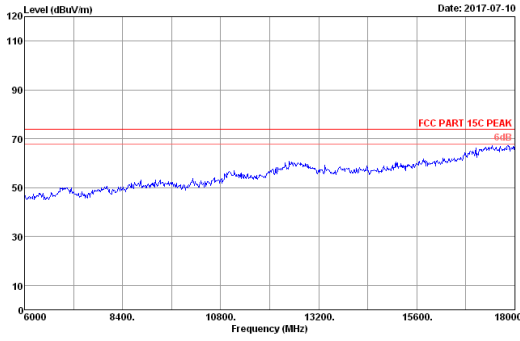


Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5500MHz Tx Mode

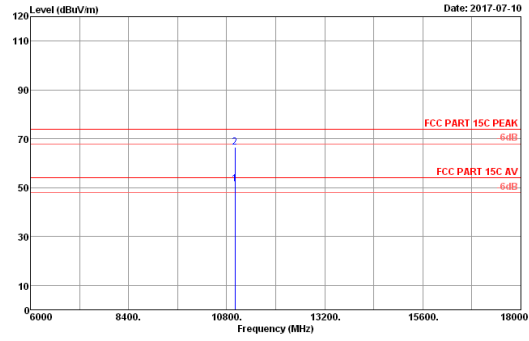


Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.00	38.50	22.15	27.16	36.21	51.60	54.00	2.40	Average
2	11000.00	38.50	22.15	42.18	36.21	66.62	74.00	7.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

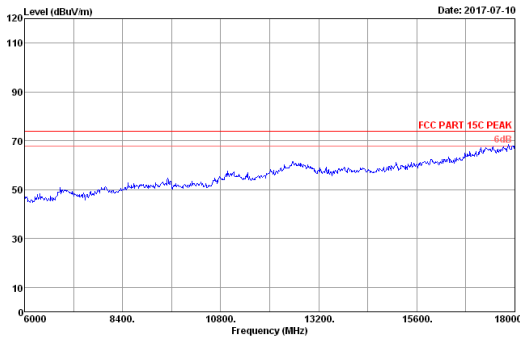


Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5500MHz Tx Mode

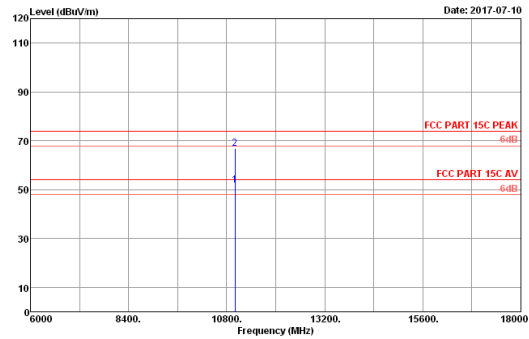

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.00	38.50	22.15	27.26	36.21	51.69	54.00	2.31	Average
2	11000.00	38.50	22.15	42.56	36.21	67.00	74.00	7.00	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

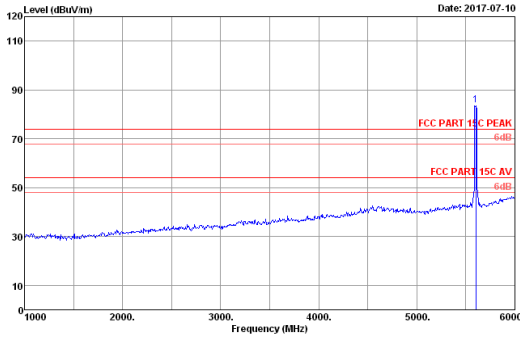


Date: 2017-07-10

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5600MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5600.00	33.71	13.27	72.26	35.45	83.79	74.00	-9.79	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

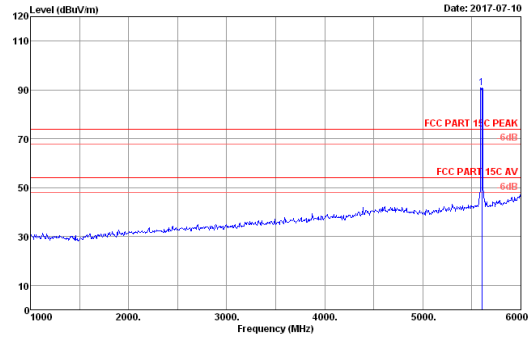


Date: 2017-07-10

Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5600MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5600.00	33.71	13.27	79.49	35.45	91.02	74.00	-17.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

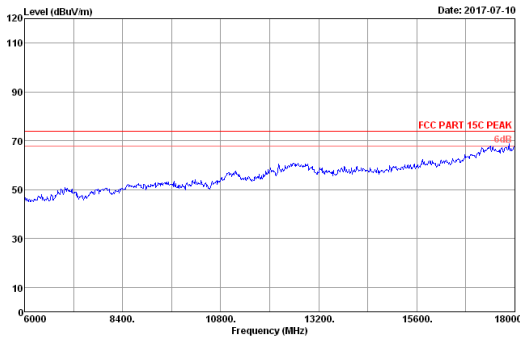

Date: 2017-07-10

Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5600MHz Tx Mode

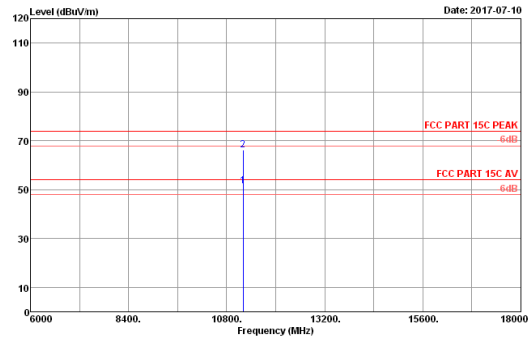


Date: 2017-07-10


Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5600MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11200.00	38.38	21.23	27.64	35.86	51.39	54.00	2.61	Average
2	11200.00	38.38	21.23	42.51	35.86	66.26	74.00	7.74	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

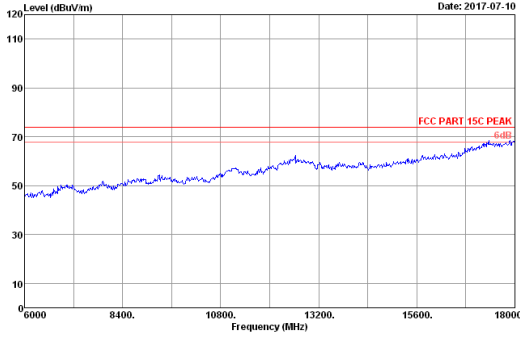


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 41
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5600MHz Tx Mode

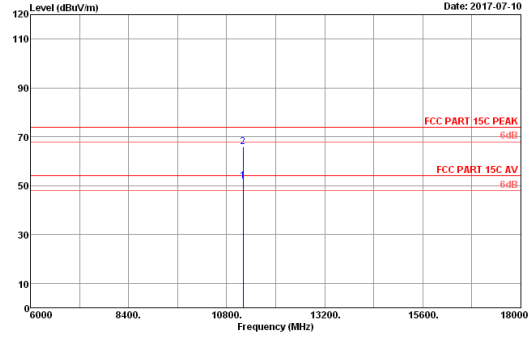

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5600MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11200.00	38.38	21.23	28.16	35.86	51.91	54.00	2.09	Average
2	11200.00	38.38	21.23	42.15	35.86	65.90	74.00	8.10	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

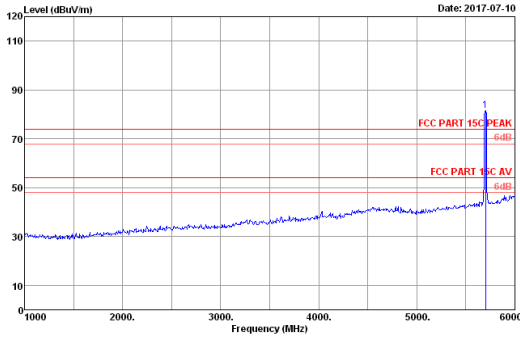

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 43
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5700MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5700.00	34.38	13.25	69.41	35.45	81.59	74.00	-7.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

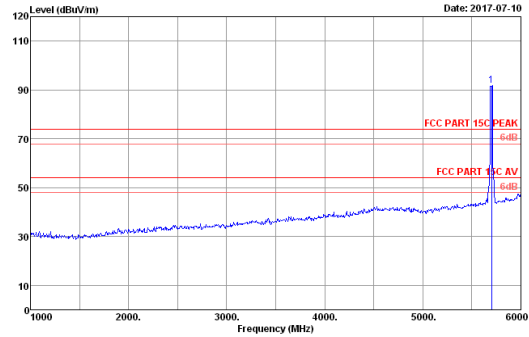


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5700MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5700.00	34.38	13.25	79.51	35.45	91.69	74.00	-17.69	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

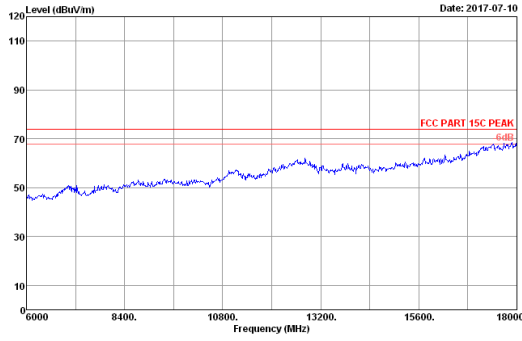


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 45
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5700MHz Tx Mode

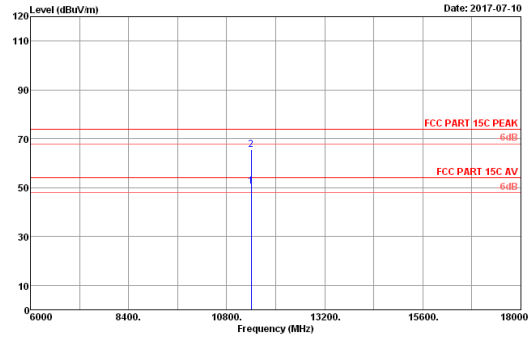


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5700MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11400.00	38.26	20.31	27.38	35.61	60.44	54.00	3.56	Average
2	11400.00	38.26	20.31	42.66	35.61	65.62	74.00	8.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

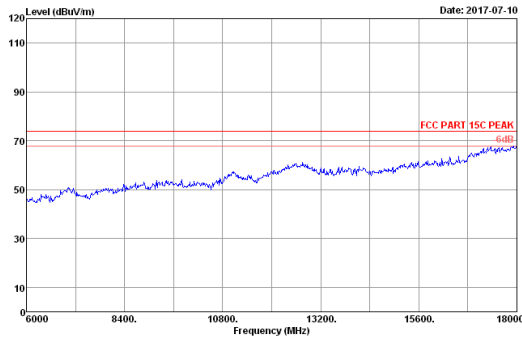


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 47
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5700MHz Tx Mode

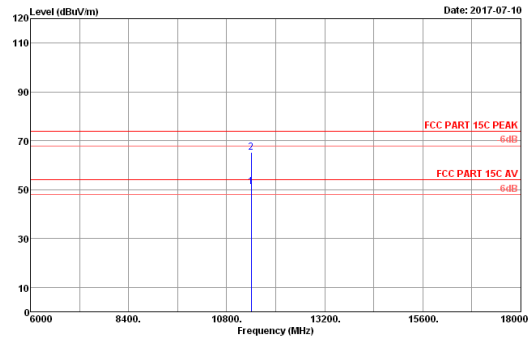

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5700MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11400.00	38.26	20.31	28.14	35.61	51.20	54.00	2.80	Average
2	11400.00	38.26	20.31	42.35	35.61	65.41	74.00	8.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

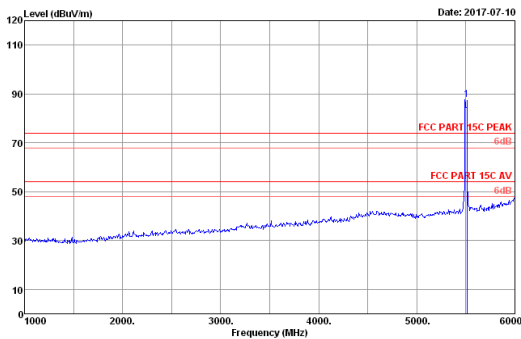

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 53
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5510MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5510.00	32.90	13.29	76.95	35.45	87.69	74.00	-13.69	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

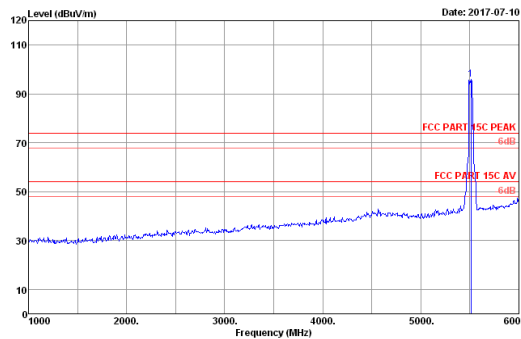

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5510MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5510.00	32.90	13.29	85.15	35.45	95.89	74.00	-21.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

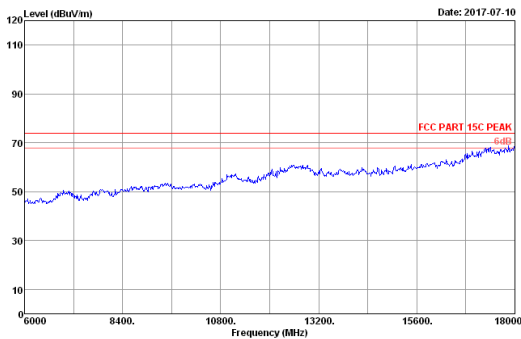

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5510MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11020.00	38.49	22.06	27.64	36.18	52.01	54.00	1.99	Average
2	11020.00	38.49	22.06	42.31	36.18	66.68	74.00	7.32	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

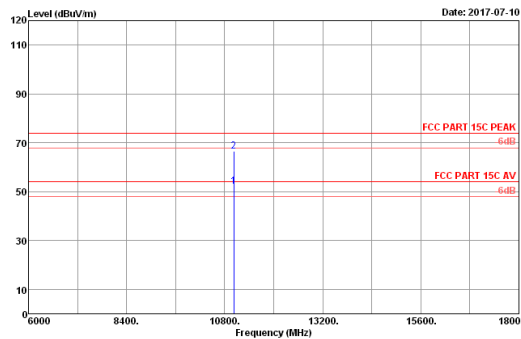


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5510MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11020.00	38.49	22.06	27.64	36.18	52.01	54.00	1.99	Average
2	11020.00	38.49	22.06	42.31	36.18	66.68	74.00	7.32	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

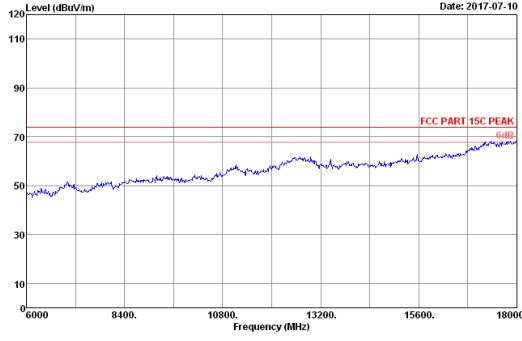


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 57
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5510MHz Tx Mode

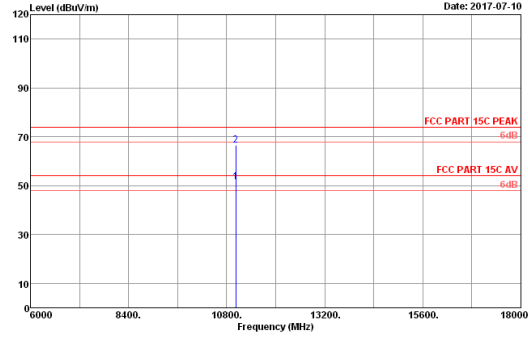

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 58
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5510MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11020.00	38.49	22.06	27.16	36.18	51.53	54.00	2.47	Average
2	11020.00	38.49	22.06	42.13	36.18	66.50	74.00	7.50	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

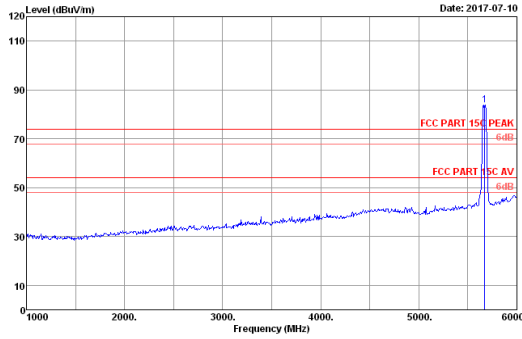

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5670MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5670.00	34.24	13.26	71.90	35.45	83.95	74.00	-9.95	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

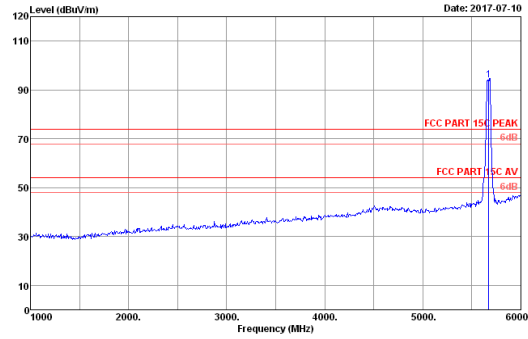


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5670MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5670.00	34.24	13.26	62.19	35.45	94.24	74.00	-20.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

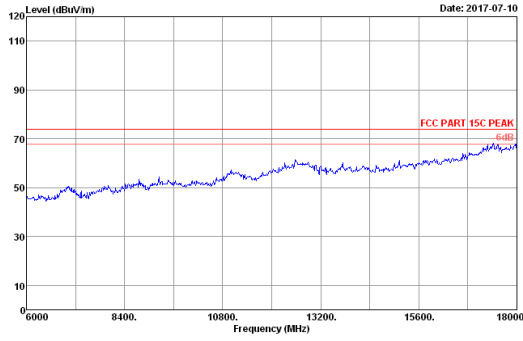


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 65
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5670MHz Tx Mode

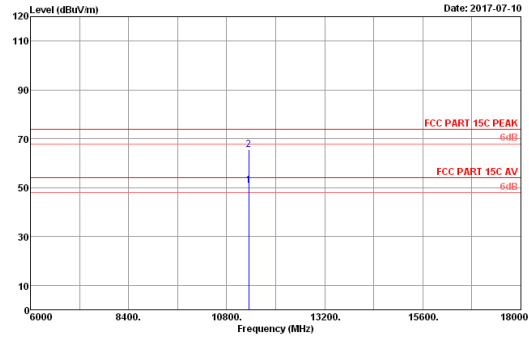


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5670MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	11340.00	38.30	20.59	27.64	35.62	50.91	54.00	3.09	Average
2	11340.00	38.30	20.59	42.36	35.62	65.63	74.00	8.37	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

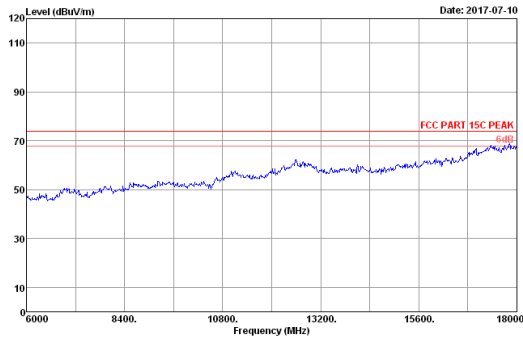


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 67
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5670MHz Tx Mode

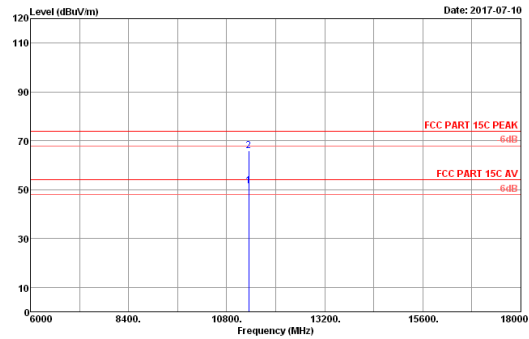

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 68
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5670MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	11340.00	38.30	20.59	28.34	35.62	51.61	54.00	2.39	Average
2	11340.00	38.30	20.59	42.54	35.62	65.81	74.00	8.19	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

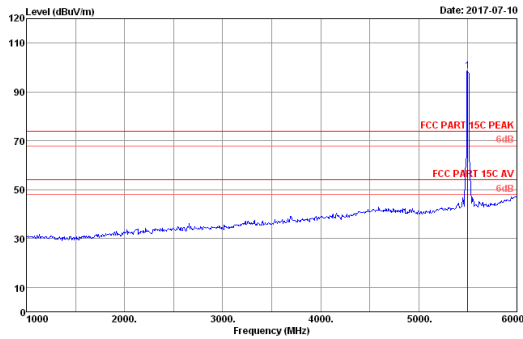

Site no. : 3m Chamber Data no. : 73
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Freq. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5500.00	32.90	13.29	87.90	35.45	98.64	74.00	-24.64	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

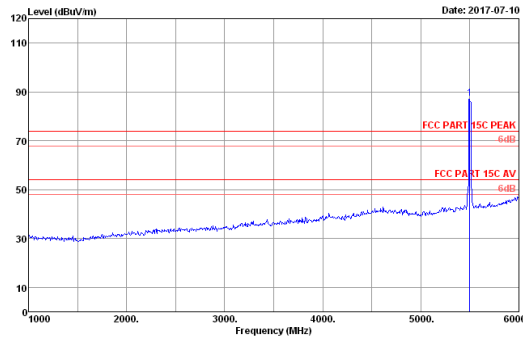


Site no. : 3m Chamber Data no. : 74
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. Freq. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5500.00	32.90	13.29	76.52	35.45	87.26	74.00	-13.26	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

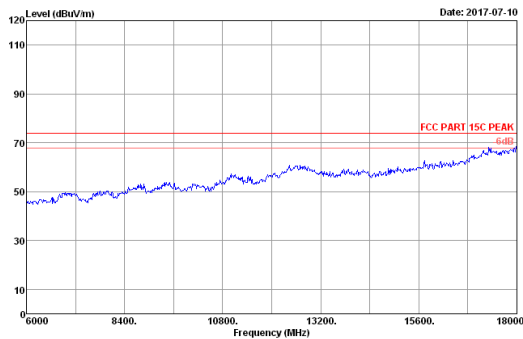


Site no. : 3m Chamber Data no. : 75
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. Freq. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5500MHz Tx Mode

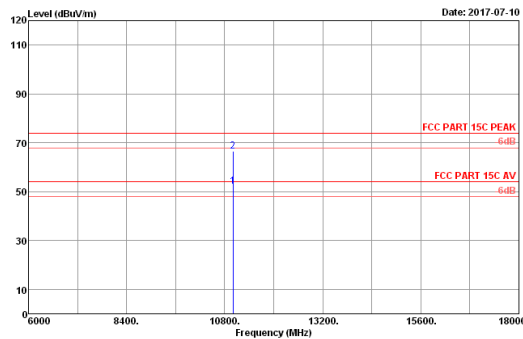


Site no. : 3m Chamber Data no. : 76
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. Freq. : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11000.00	38.50	22.15	27.65	36.21	52.09	54.00	1.91	Average
2	11000.00	38.50	22.15	41.98	36.21	66.42	74.00	7.58	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

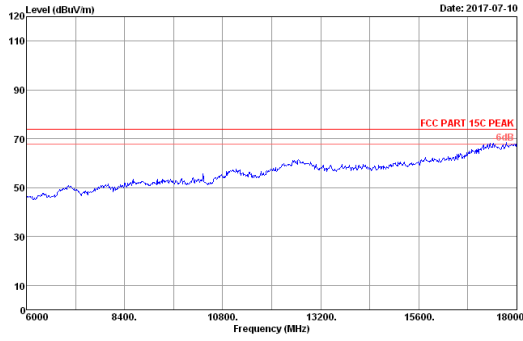


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 77
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5500MHz Tx Mode

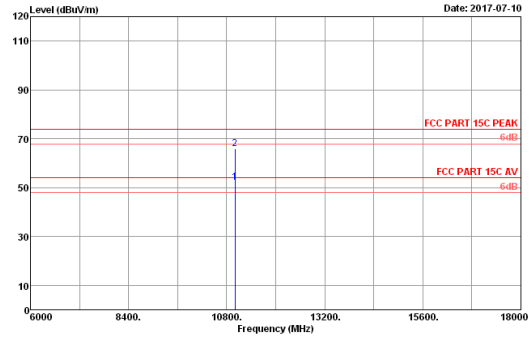

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 78
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11000.00	38.50	22.15	27.58	36.21	52.02	54.00	1.98	Average
2	11000.00	38.50	22.15	41.54	36.21	65.98	74.00	8.02	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

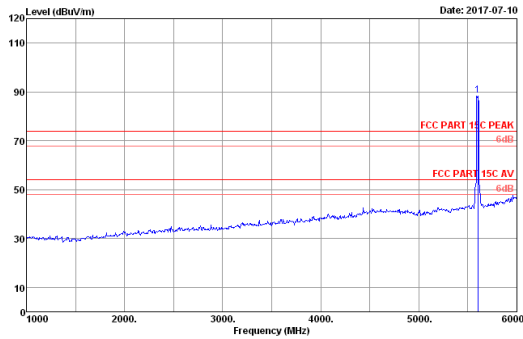

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 83
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5600MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5600.00	33.71	13.27	76.98	35.45	88.51	74.00	-14.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

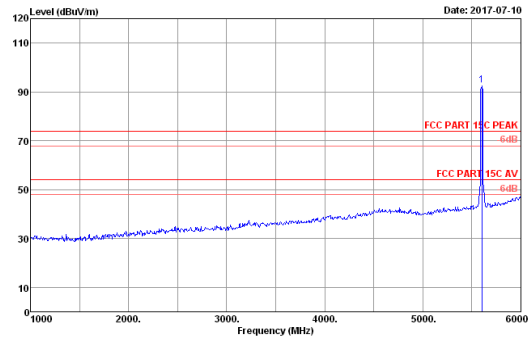


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 84
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5600MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5600.00	33.71	13.27	81.16	35.45	92.69	74.00	-18.69	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

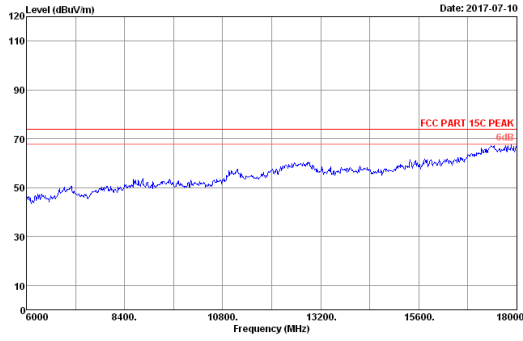


Site no. : 3m Chamber Data no. : 85
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEB802.11ac VHT20 5600MHz Tx Mode

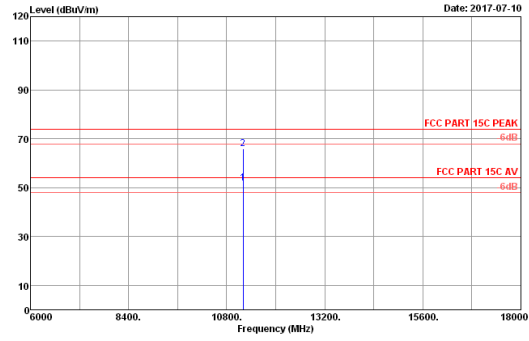


Site no. : 3m Chamber Data no. : 86
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEB802.11ac VHT20 5600MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dB)	Margin (dB)	Remark
1	11200.00	38.38	21.23	28.04	35.86	51.79	54.00	2.21	Average
2	11200.00	38.38	21.23	42.13	35.86	65.88	74.00	8.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

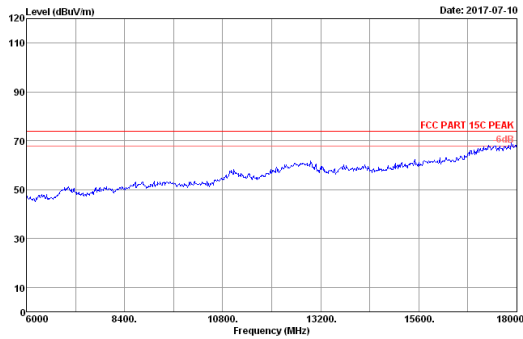


Site no. : 3m Chamber Data no. : 87
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEB802.11ac VHT20 5600MHz Tx Mode

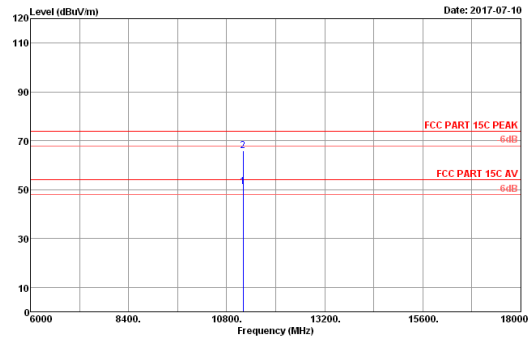

Site no. : 3m Chamber Data no. : 88
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1nC/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEB802.11ac VHT20 5600MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dB)	Margin (dB)	Remark
1	11200.00	38.38	21.23	27.44	35.86	51.19	54.00	2.81	Average
2	11200.00	38.38	21.23	42.31	35.86	66.06	74.00	7.94	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

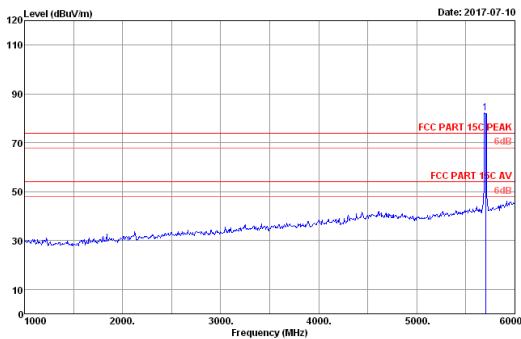

Site no. : 3m Chamber Data no. : 89
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5700MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5700.00	34.38	13.25	69.97	35.45	82.15	74.00	-8.15	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

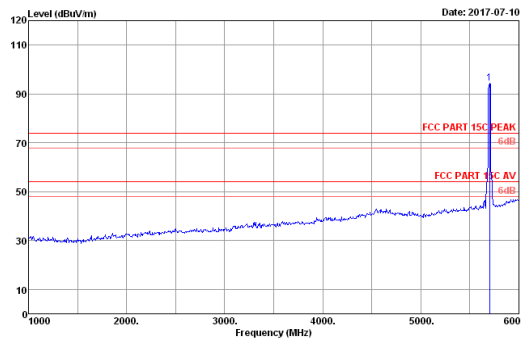


Site no. : 3m Chamber Data no. : 90
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5700MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5700.00	34.38	13.25	82.15	35.45	94.33	74.00	-20.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

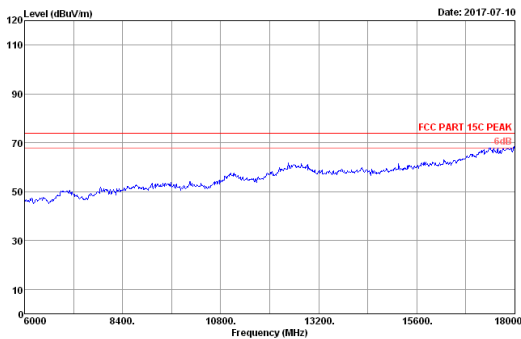


Site no. : 3m Chamber Data no. : 91
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5700MHz Tx Mode

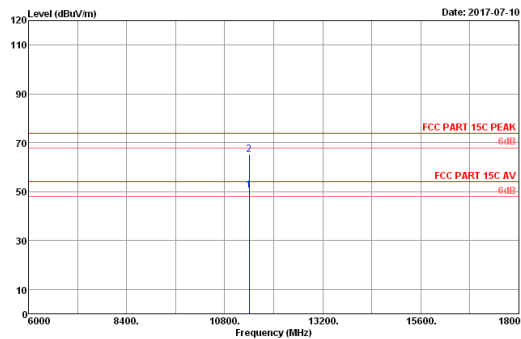

Site no. : 3m Chamber Data no. : 92
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5700MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11400.00	38.26	20.31	27.64	35.51	57.70	54.00	3.30	Average
2	11400.00	38.26	20.31	42.15	35.51	65.21	74.00	8.79	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

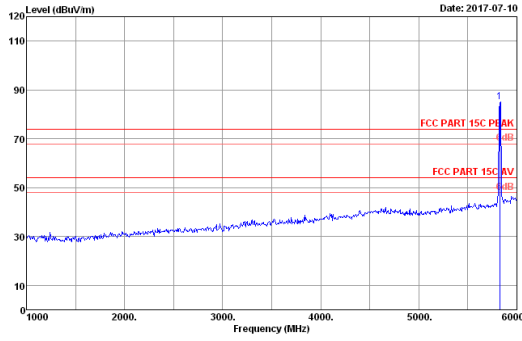

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	5825.00	35.46	13.23	71.81	35.45	85.05	74.00	-11.05	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

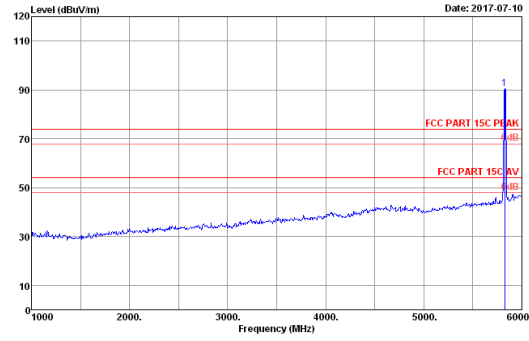


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	5825.00	35.46	13.23	77.47	35.45	90.71	74.00	-16.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

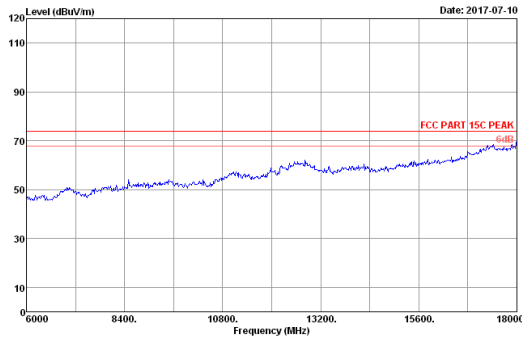


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx Mode

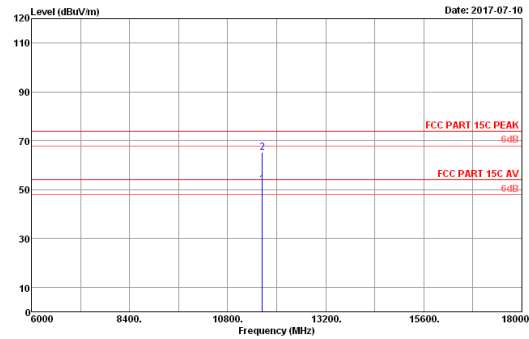


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	11850.00	38.14	20.24	29.26	35.37	52.27	54.00	1.73	Average
2	11850.00	38.14	20.24	42.17	35.37	65.18	74.00	8.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

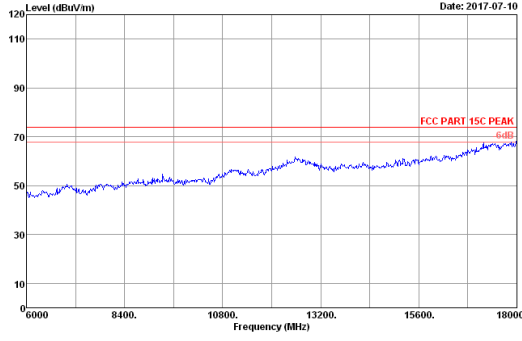


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Pre : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5825MHz Tx Mode

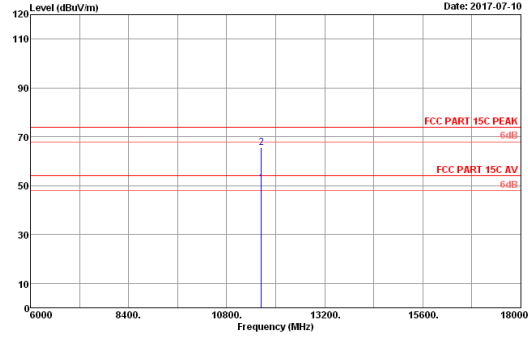

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Pre : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5825MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.14	20.24	27.86	35.37	50.87	54.00	3.13	Average
2	11650.00	38.14	20.24	42.59	35.37	65.60	74.00	8.40	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

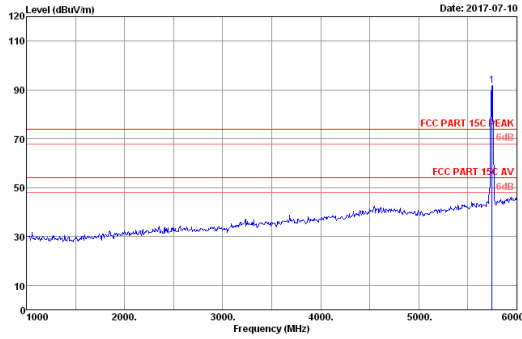

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Pre : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	34.78	13.25	79.27	35.45	91.85	74.00	-17.85	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

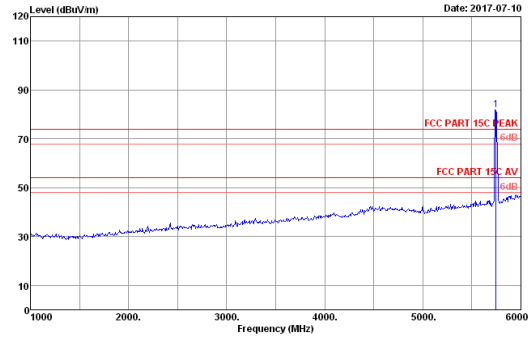


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. Pre : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	34.78	13.25	69.26	35.45	81.84	74.00	-7.84	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

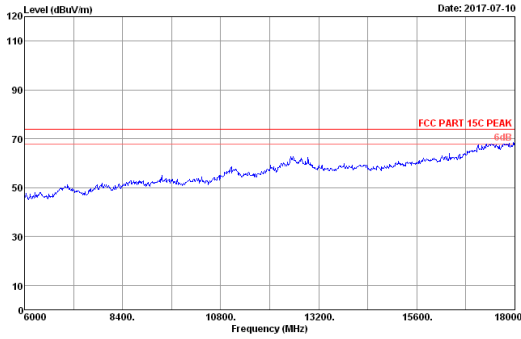


Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5745MHz Tx Mode

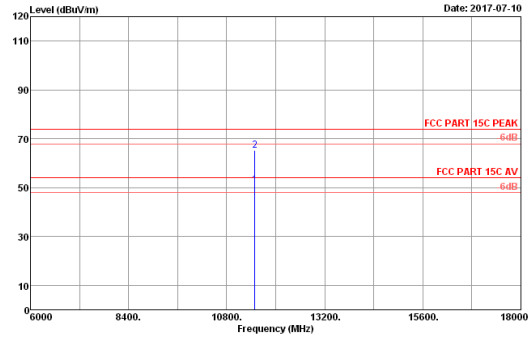


Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.21	19.94	28.36	35.36	51.15	54.00	2.85	Average
2	11490.00	38.21	19.94	42.56	35.36	65.35	74.00	8.66	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

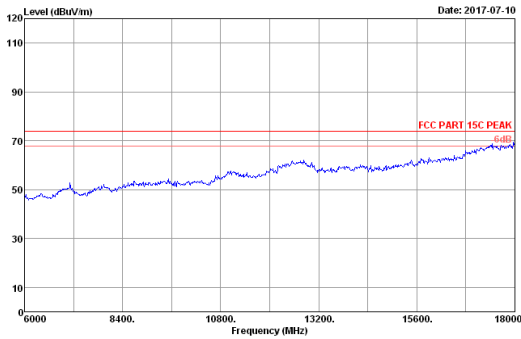


Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5745MHz Tx Mode

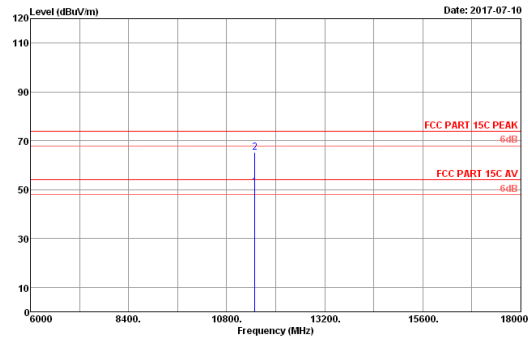

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.21	19.94	28.46	35.36	51.25	54.00	2.75	Average
2	11490.00	38.21	19.94	42.35	35.36	65.14	74.00	8.86	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

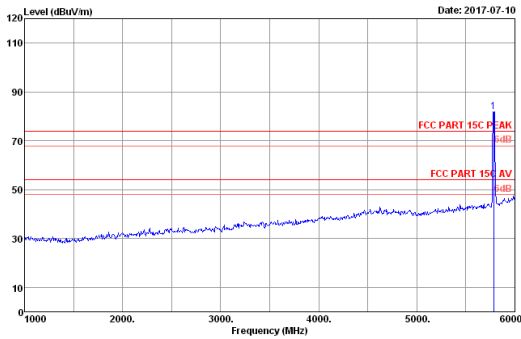

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5785MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	5785.00	35.05	13.24	69.03	35.45	81.87	74.00	-7.87	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

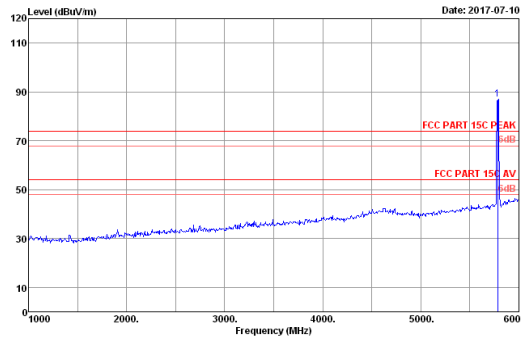


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5785MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	5785.00	35.05	13.24	74.06	35.45	86.90	74.00	-12.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

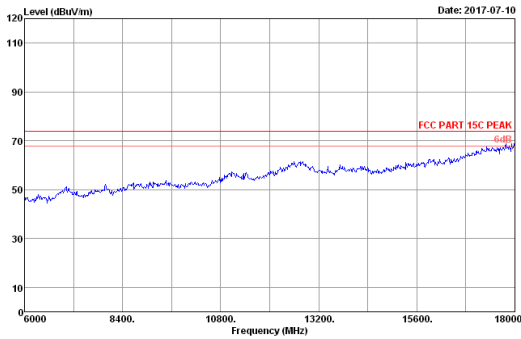


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5785MHz Tx Mode

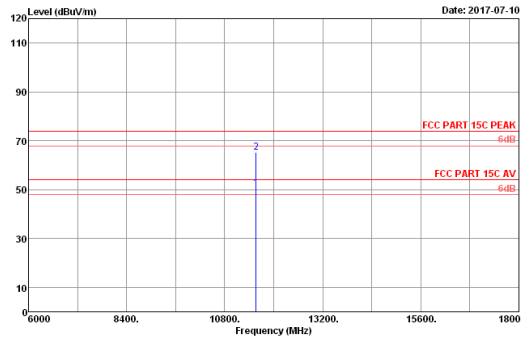


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT20 5785MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	11870.00	38.17	20.02	27.69	35.35	50.53	54.00	3.47	Average
2	11870.00	38.17	20.02	42.31	35.35	65.15	74.00	8.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

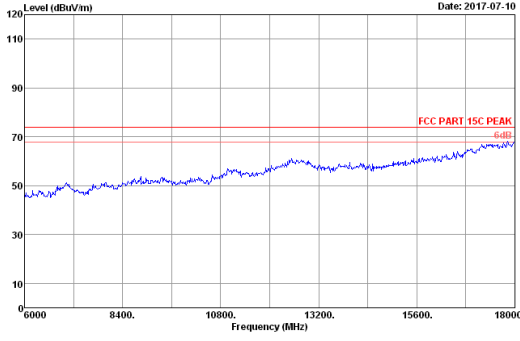


Site no. : 3m Chamber Data no. : 41
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5785MHz Tx Mode

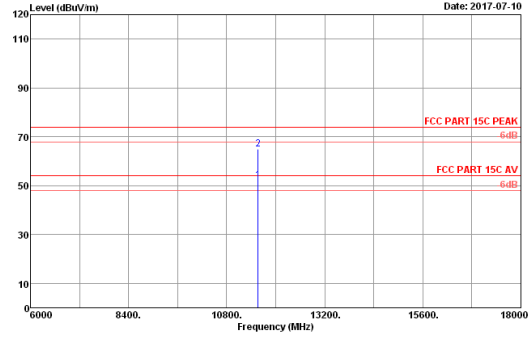

Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5785MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.17	20.02	29.34	35.35	52.18	54.00	1.82	Average
2	11570.00	38.17	20.02	42.19	35.35	65.03	74.00	8.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

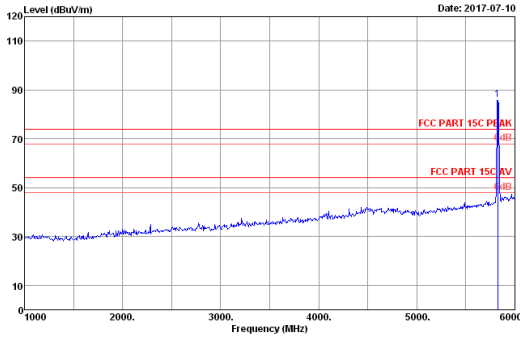

Site no. : 3m Chamber Data no. : 43
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5825MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	35.46	13.23	72.74	35.45	85.98	74.00	-11.98	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

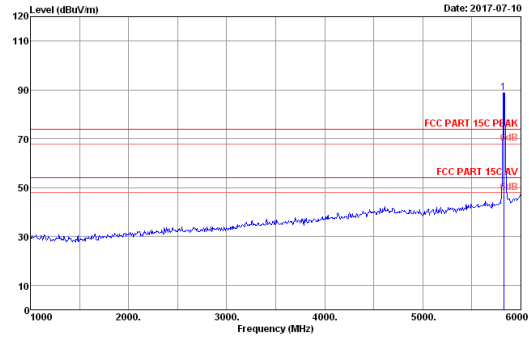


Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5825MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	35.46	13.23	75.87	35.45	89.11	74.00	-15.11	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

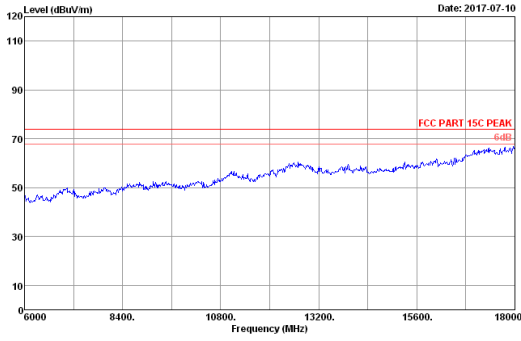


Site no. : 3m Chamber Data no. : 45
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5825MHz Tx Mode

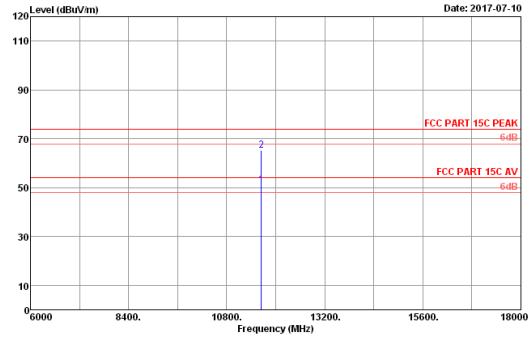


Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5825MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	11650.00	38.14	20.24	28.35	35.37	51.36	54.00	-2.64	Average
2	11650.00	38.14	20.24	42.32	35.37	65.33	74.00	-8.67	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

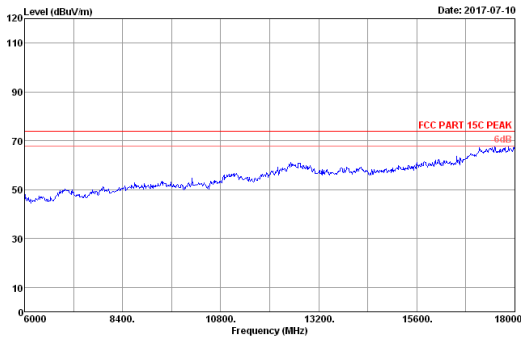


Site no. : 3m Chamber Data no. : 47
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5825MHz Tx Mode

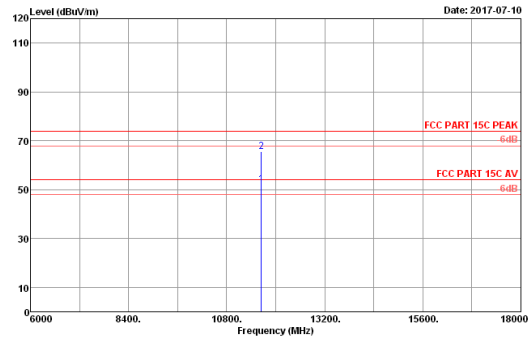

Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 5825MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	11650.00	38.14	20.24	29.13	35.37	52.14	54.00	-1.86	Average
2	11650.00	38.14	20.24	42.72	35.37	65.73	74.00	-8.27	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

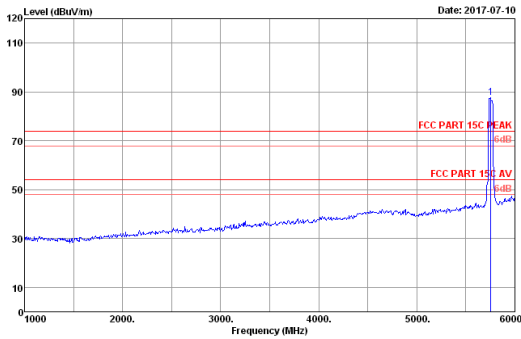

Site no. : 3m Chamber Data no. : 53
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5755MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	5755.00	34.92	13.24	74.97	35.45	87.68	74.00	-13.68	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

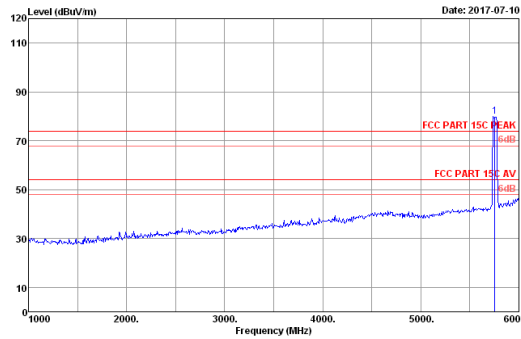

Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5755MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	5755.00	34.92	13.24	67.42	35.45	80.13	74.00	-6.13	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

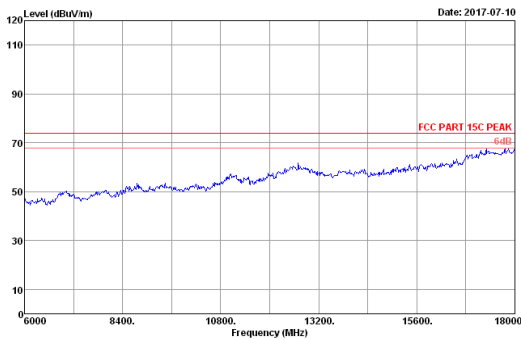

Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5755MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	11810.00	38.20	19.85	29.15	35.34	51.86	54.00	2.14	Average
2	11810.00	38.20	19.85	42.36	35.34	65.07	74.00	8.93	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

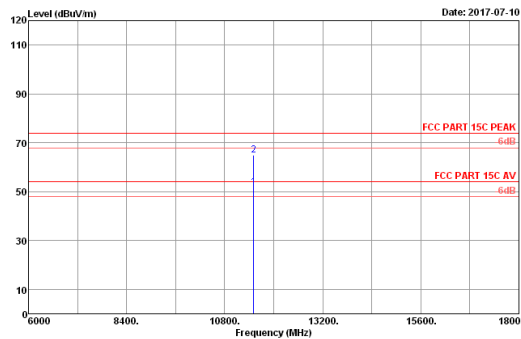


Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11n HT40 5755MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	11810.00	38.20	19.85	29.15	35.34	51.86	54.00	2.14	Average
2	11810.00	38.20	19.85	42.36	35.34	65.07	74.00	8.93	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

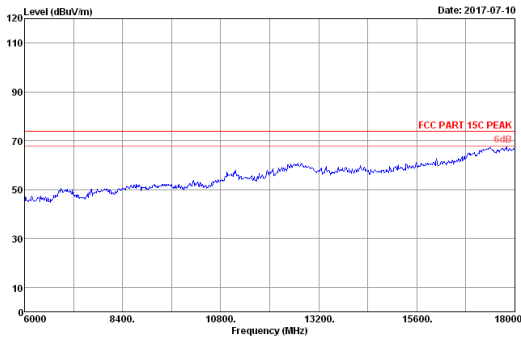


Date: 2017-07-10
 Site no. : 3n Chamber Data no. : 57
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Pre : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5755MHz Tx Mode

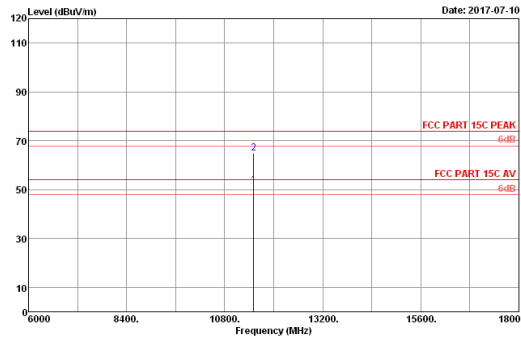

Date: 2017-07-10
 Site no. : 3n Chamber Data no. : 58
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Pre : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5755MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11810.00	38.20	19.85	29.14	35.34	51.85	54.00	2.15	Average
2	11810.00	38.20	19.85	42.36	35.34	65.07	74.00	8.93	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

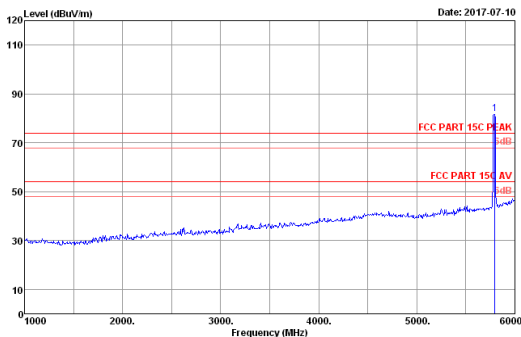

Date: 2017-07-10
 Site no. : 3n Chamber Data no. : 63
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. Pre : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5795MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	35.19	13.24	68.79	35.45	81.77	74.00	-7.77	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

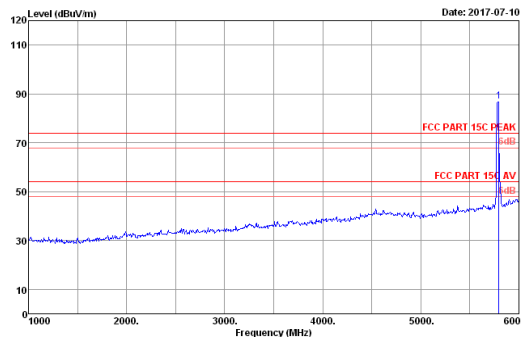


Date: 2017-07-10
 Site no. : 3n Chamber Data no. : 64
 Dis. / Ant. : 3n 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Pre : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5795MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	35.19	13.24	73.91	35.45	86.89	74.00	-12.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

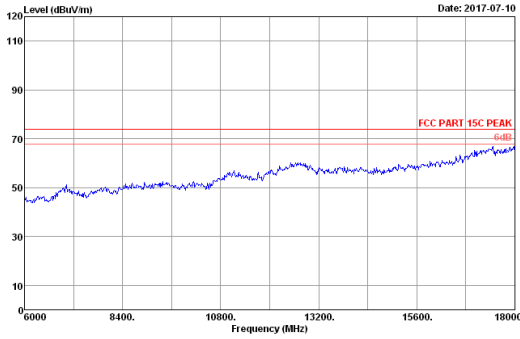


Site no. : 3m Chamber Data no. : 65
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5795MHz Tx Mode

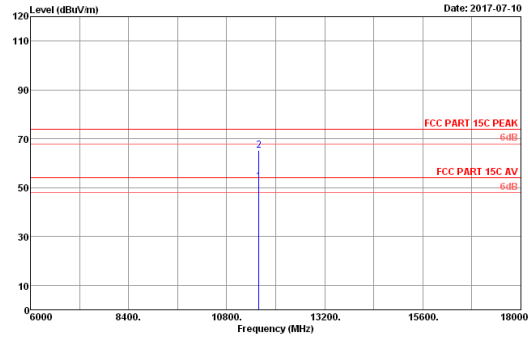


Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5795MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11890.00	38.17	20.07	29.64	35.36	52.52	54.00	1.48	Average
2	11890.00	38.17	20.07	42.51	35.36	65.39	74.00	8.61	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

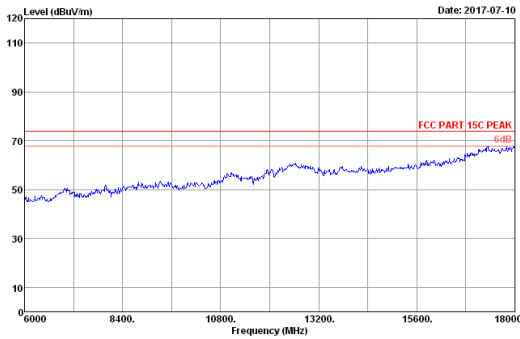


Site no. : 3m Chamber Data no. : 67
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5795MHz Tx Mode

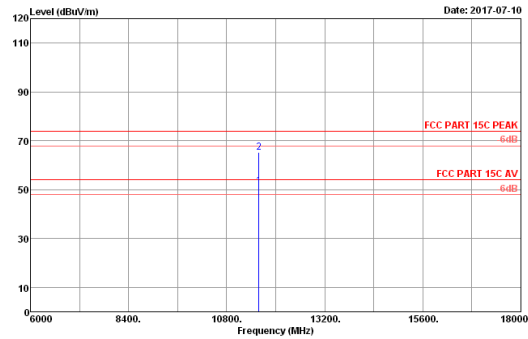

Site no. : 3m Chamber Data no. : 68
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11n HT40 5795MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11890.00	38.17	20.07	28.65	35.36	51.53	54.00	2.47	Average
2	11890.00	38.17	20.07	42.51	35.36	65.39	74.00	8.61	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

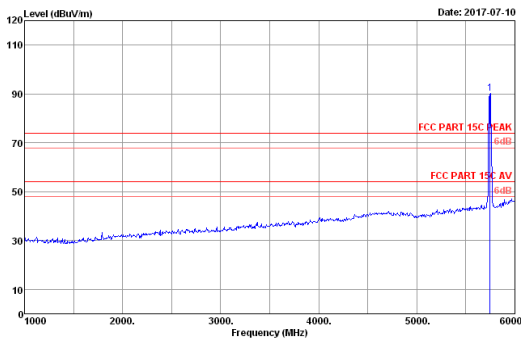

Site no. : 3m Chamber Data no. : 73
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	5745.00	34.78	13.25	77.67	35.45	90.25	74.00	-16.25	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

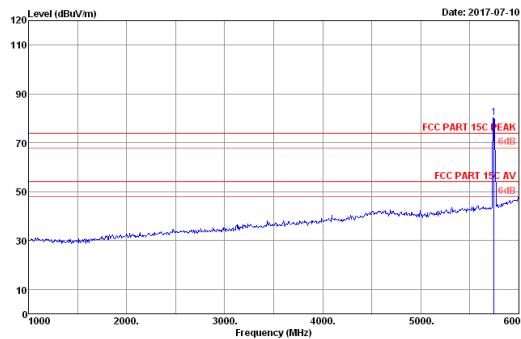


Site no. : 3m Chamber Data no. : 74
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	5745.00	34.78	13.25	67.70	35.45	80.28	74.00	-6.28	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

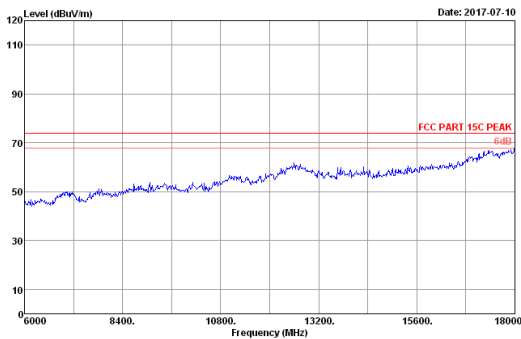


Site no. : 3m Chamber Data no. : 75
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5745MHz Tx Mode

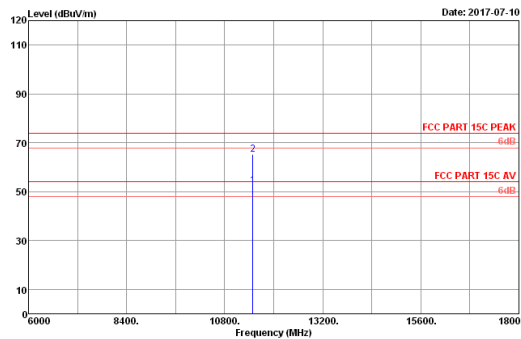


Site no. : 3m Chamber Data no. : 76
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBu)	AMP factor (dB)	Emission Level (dBu/m)	Limits (dBu/m)	Margin (dB)	Remark
1	11490.00	38.21	19.94	29.54	35.36	52.33	54.00	1.67	Average
2	11490.00	38.21	19.94	42.39	35.36	65.18	74.00	8.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

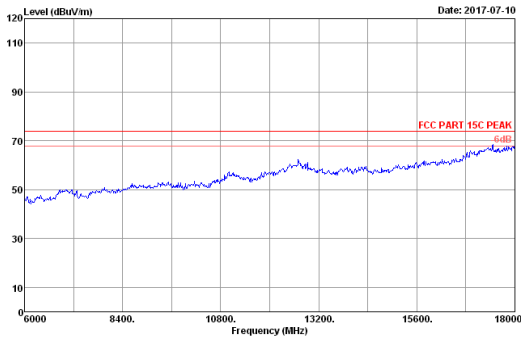


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 93
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5700MHz Tx Mode

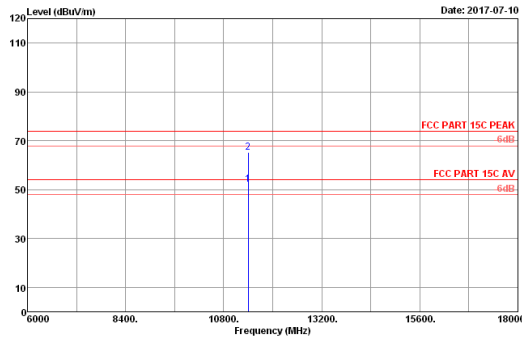

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 94
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT20 5700MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11400.00	38.26	20.31	29.16	35.61	62.22	64.00	1.78	Average
2	11400.00	38.26	20.31	42.35	35.61	65.41	74.00	8.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

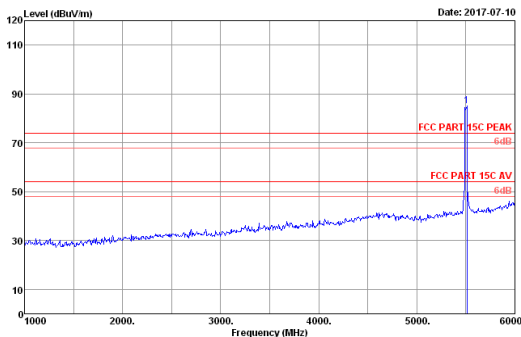

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 99
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5510MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5510.00	32.90	13.29	74.36	35.45	85.10	74.00	-11.10	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

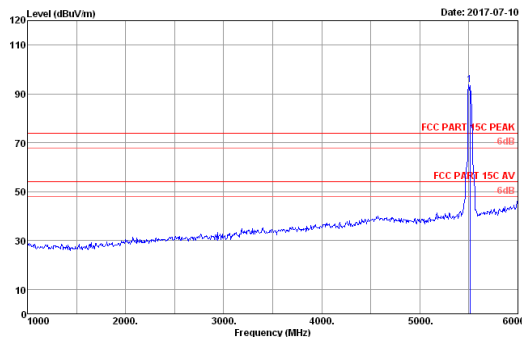


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.1kC/62.3k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5510MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5510.00	32.90	13.29	62.87	35.45	93.61	74.00	-19.61	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

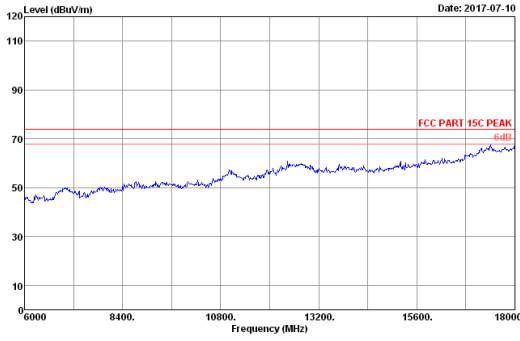


Site no. : 3m Chamber Data no. : 101
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEB802.11ac VHT40 5510MHz Tx Mode

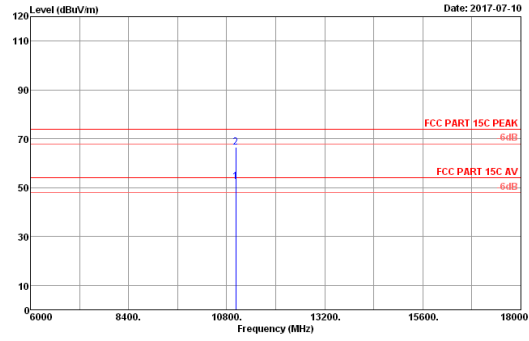


Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEB802.11ac VHT40 5510MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11020.00	38.49	22.06	27.96	36.18	52.33	54.00	1.67	Average
2	11020.00	38.49	22.06	42.13	36.18	66.50	74.00	7.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

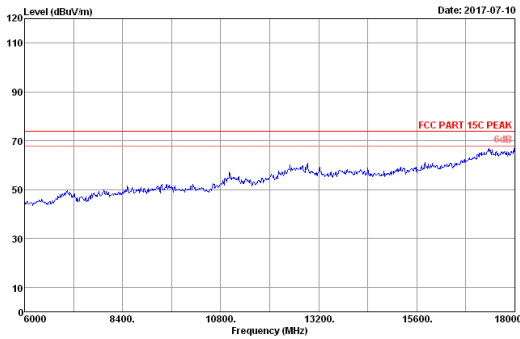


Site no. : 3m Chamber Data no. : 103
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEB802.11ac VHT40 5510MHz Tx Mode

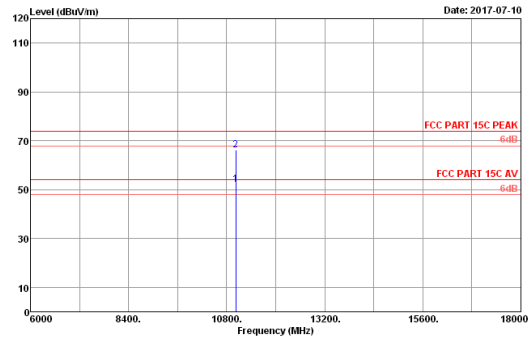

Site no. : 3m Chamber Data no. : 104
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEB802.11ac VHT40 5510MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11020.00	38.49	22.06	27.63	36.18	52.00	54.00	2.00	Average
2	11020.00	38.49	22.06	41.98	36.18	66.35	74.00	7.65	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

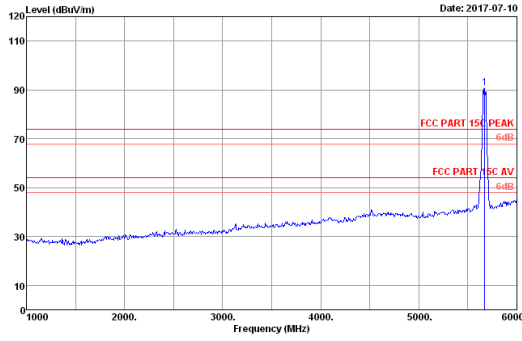

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 109
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5670MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5670.00	34.24	13.26	78.74	35.45	90.79	74.00	-16.79	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

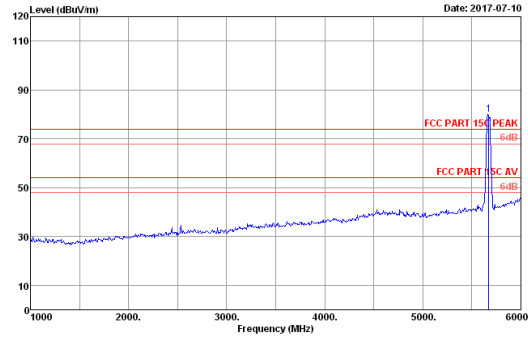


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 110
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5670MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5670.00	34.24	13.26	68.09	35.45	80.14	74.00	-6.14	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

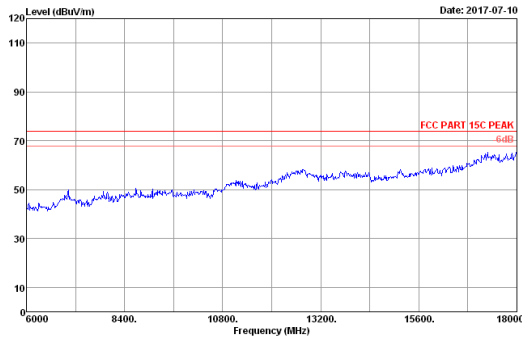


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 111
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5670MHz Tx Mode

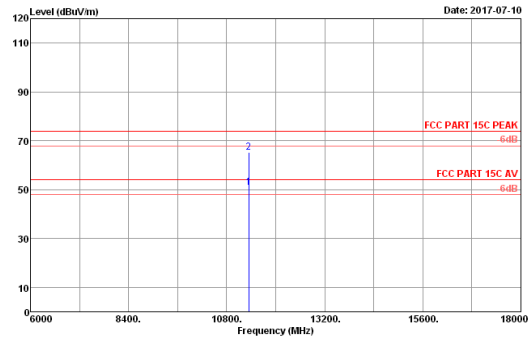


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 112
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. Freq : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5670MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading factor (dBuV)	AMP (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11340.00	38.30	20.59	27.64	35.62	50.91	54.00	3.09	Average
2	11340.00	38.30	20.59	42.13	35.62	65.40	74.00	8.60	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

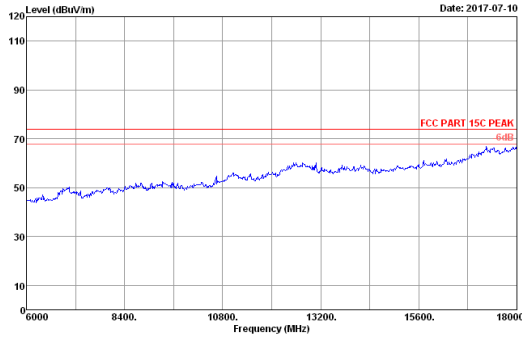


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 113
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. pre : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5670MHz Tx Mode

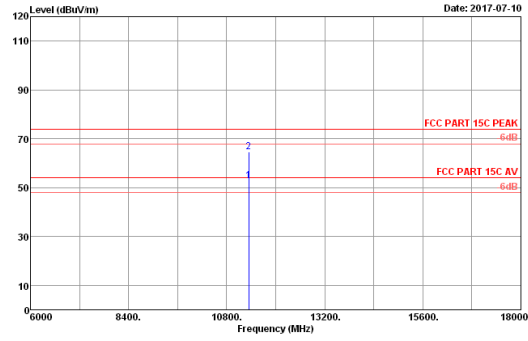

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 114
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. pre : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT40 5670MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11340.00	38.30	20.59	29.64	35.62	52.91	54.00	1.09	Average
2	11340.00	38.30	20.59	41.27	35.62	64.54	74.00	9.46	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

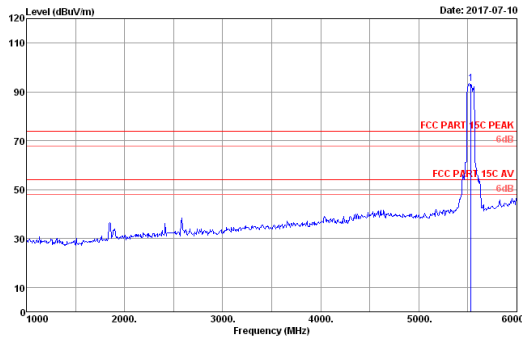

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 119
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Ant. pre : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 5530MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5530.00	33.03	13.29	62.70	35.45	93.57	74.00	-19.57	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

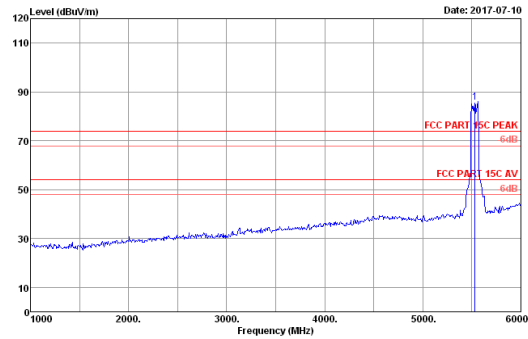


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 120
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Ant. pre : 101.2kPa
 Env. / Ins. : 23.14C/62.3% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 5530MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5530.00	33.03	13.29	74.83	35.45	85.70	74.00	-11.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

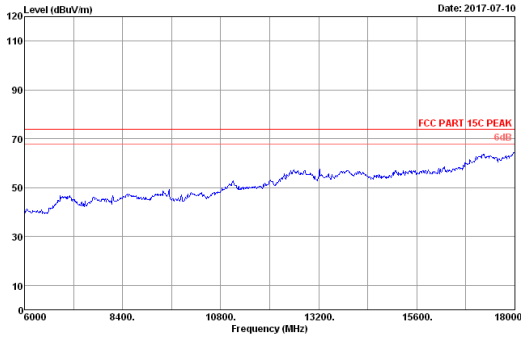


Site no. : 3m Chamber Data no. : 121
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 5530MHz Tx Mode

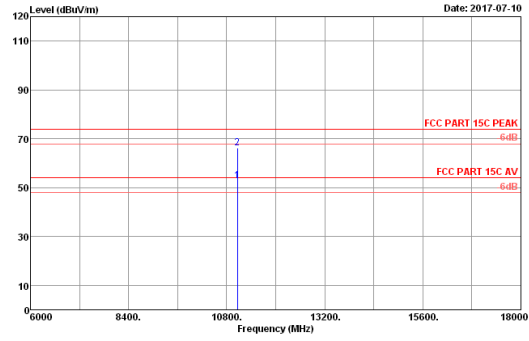


Site no. : 3m Chamber Data no. : 122
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 5530MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.00	38.46	21.87	28.61	36.11	52.83	54.00	1.17	Average
2	11060.00	38.46	21.87	42.14	36.11	66.36	74.00	7.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

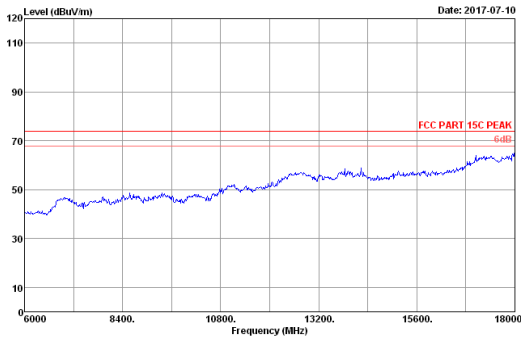

Site no. : 3m Chamber Data no. : 123
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 5530MHz Tx Mode

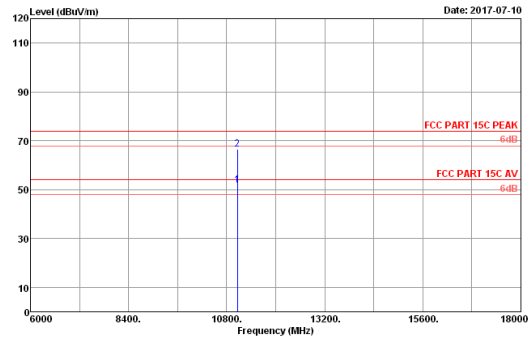


Site no. : 3m Chamber Data no. : 124
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.1uV/62.3mV Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11ac VHT80 5530MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.00	38.46	21.87	27.47	36.11	51.69	54.00	2.31	Average
2	11060.00	38.46	21.87	42.26	36.11	66.48	74.00	7.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.


5745-5825MHz Band:
Frequency: 30MHz~1GHz

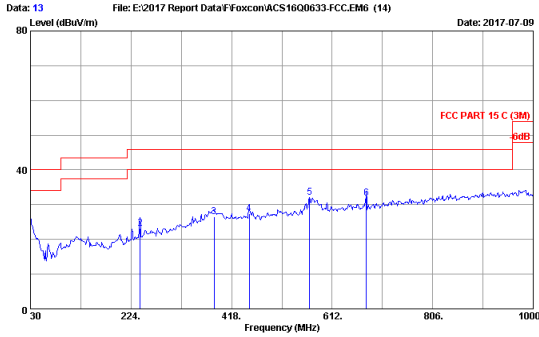

Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2017 CBL6112D 35375 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 21.8°C/54% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power rating : AC 120V/60Hz
 Test Mode : WIFI 5G Band4 TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	18.90	6.57	-1.96	23.51	40.00	16.49	QP
2	241.460	12.76	7.55	2.97	23.28	46.00	22.72	QP
3	384.050	16.40	8.15	1.95	26.50	46.00	19.50	QP
4	451.950	17.58	8.40	1.37	27.35	46.00	18.65	QP
5	568.350	18.91	8.84	4.30	32.05	46.00	13.95	QP
6	677.960	19.90	9.44	2.48	31.82	46.00	14.18	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

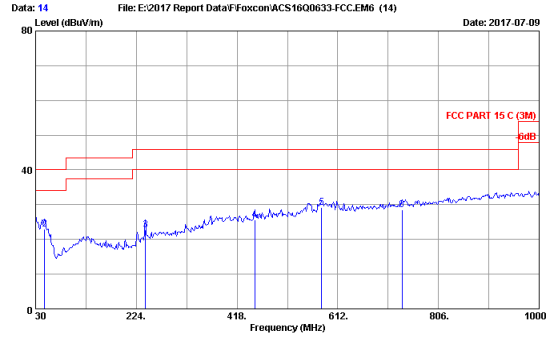


Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2017 CBL6112D 35375 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 21.8°C/54% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power rating : AC 120V/60Hz
 Test Mode : WIFI 5G Band4 TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	18.90	6.57	-1.41	24.06	40.00	15.94	QP
2	47.460	11.27	6.63	4.97	22.87	40.00	17.13	QP
3	241.460	12.76	7.55	2.38	22.69	46.00	23.31	QP
4	451.950	17.58	8.40	-0.35	25.63	46.00	20.37	QP
5	580.960	19.03	8.89	1.25	29.17	46.00	16.83	QP
6	736.160	20.46	9.68	-1.71	28.43	46.00	17.57	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Frequency: 1GHz~18GHz

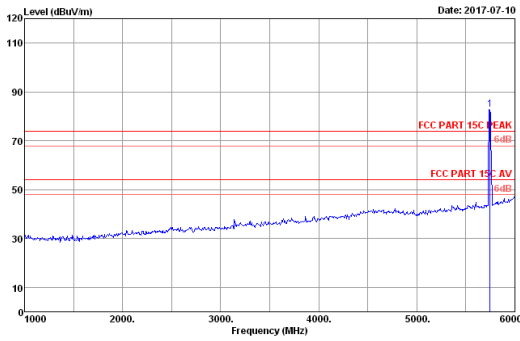

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.4k/53.1k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	34.78	13.25	70.44	35.45	83.02	74.00	-9.02	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

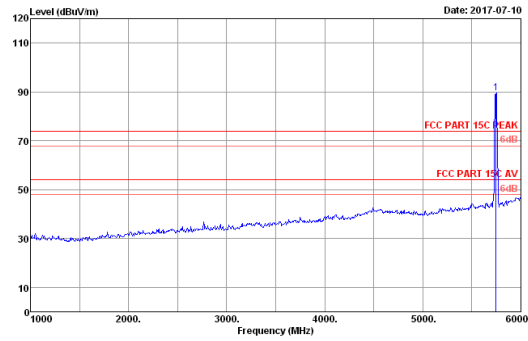

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.4k/53.1k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	34.78	13.25	77.13	35.45	89.71	74.00	-15.71	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

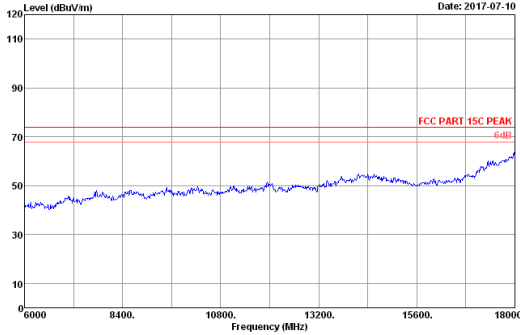

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.4k/53.1k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.21	19.94	29.28	35.36	52.07	54.00	1.93	Average
2	11490.00	38.21	19.94	43.16	35.36	65.95	74.00	8.05	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

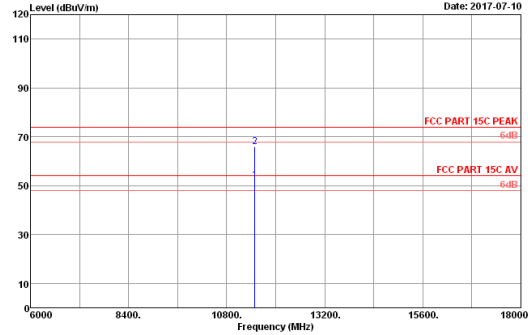


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.4k/53.1k Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEEE802.11a 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.21	19.94	29.28	35.36	52.07	54.00	1.93	Average
2	11490.00	38.21	19.94	43.16	35.36	65.95	74.00	8.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Ant Factor
 2. The emission levels that are 20dB below the official limit are not reported.

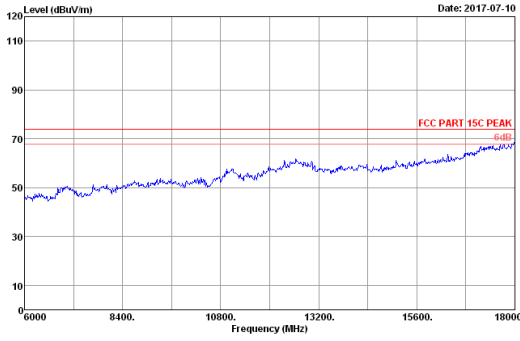


Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5745MHz Tx Mode

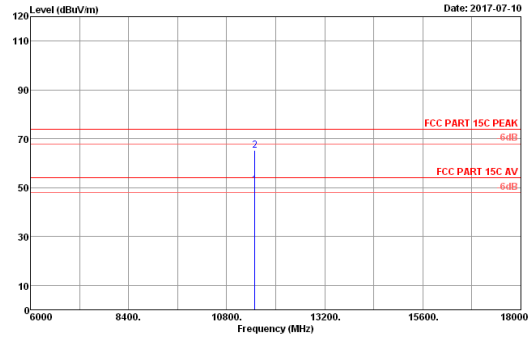

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.21	19.94	28.56	35.36	51.35	54.00	-2.65	Average
2	11490.00	38.21	19.94	42.35	35.36	65.14	74.00	-8.86	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

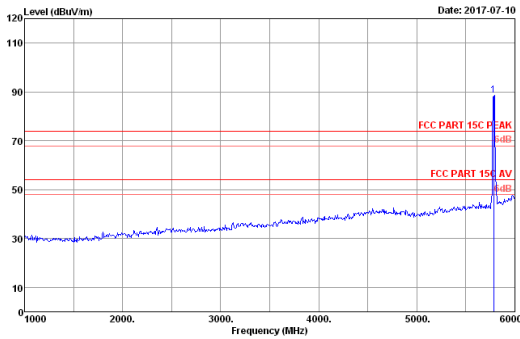

Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5785MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	35.05	13.24	75.80	35.45	88.64	74.00	-14.64	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

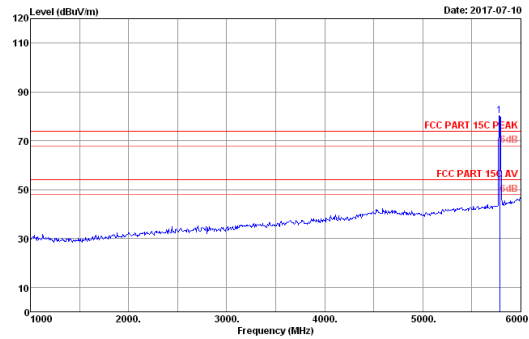


Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5785MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	35.05	13.24	67.45	35.45	80.29	74.00	-6.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

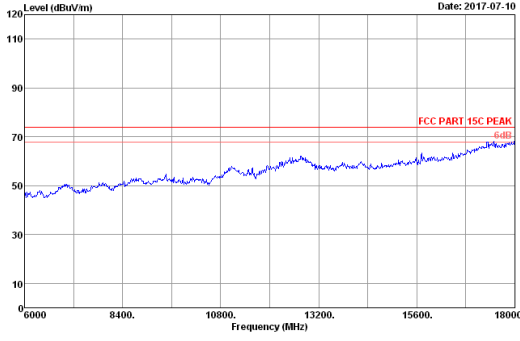


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5785MHz Tx Mode

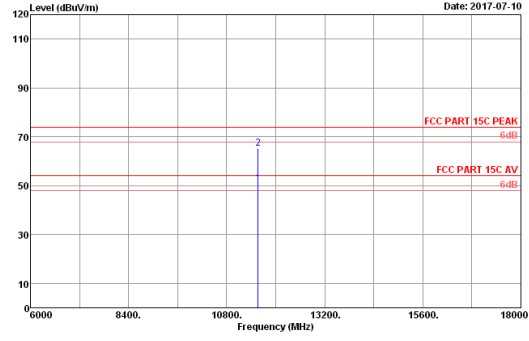


Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5785MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.17	20.02	27.96	35.35	50.80	54.00	3.20	Average
2	11570.00	38.17	20.02	42.36	35.35	65.20	74.00	8.80	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

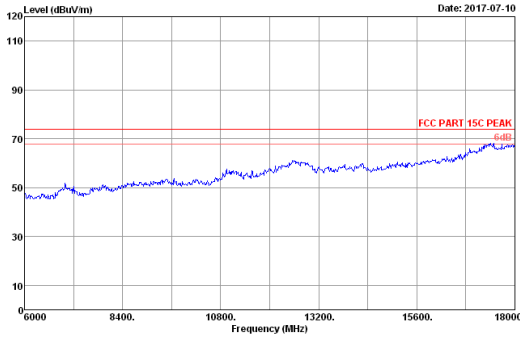

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5785MHz Tx Mode

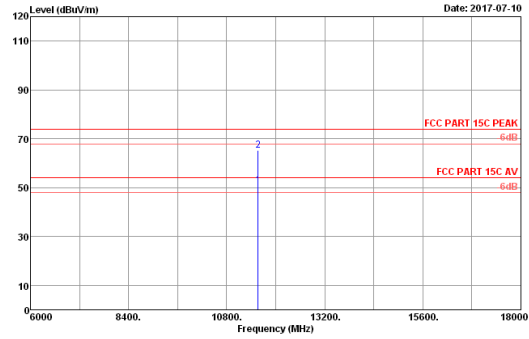

Date: 2017-07-10
 Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2017 ANT 3007 HF Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Freq : 101.2kPa
 Env. / Ins. : 23.4°C/53.1% Engineer : Garry
 EUT : Cash Register M/N:SPB1-01
 Power : AC 120V/60Hz
 Test Mode : IEE802.11a 5785MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.17	20.02	28.06	35.35	50.90	54.00	3.10	Average
2	11570.00	38.17	20.02	42.35	35.35	65.19	74.00	8.81	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.