

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

Square Inc.

POS Terminal

Model No.: SPD1-XX

FCC ID: 2AF3K-SPD1

Prepared for : Square Inc.

1455 Market St. Suite 600 San Francisco, California  
United States 94103

Prepared By : Audix Technology (Shenzhen) Co., Ltd.

No. 6, Kefeng Road, Science & Technology Park,  
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F18217

Date of Test : Sep.21~29, 2018

Date of Report : Oct.12, 2018

**TABLE OF CONTENTS**

<u>Description</u>	<u>Page</u>
<b>1. SUMMARY OF STANDARDS AND RESULTS .....</b>	<b>1-1</b>
1.1. Description of Standards and Results .....	1-1
<b>2. GENERAL INFORMATION .....</b>	<b>2-1</b>
2.1. Description of Device (EUT).....	2-1
2.2. Tested Supporting System Details .....	2-3
2.3. Block diagram of connection between the EUT and simulators .....	2-3
2.4. Test Facility .....	2-3
2.5. Measurement Uncertainty (95% confidence levels, k=2).....	2-4
<b>3. POWER LINE CONDUCTED EMISSION TEST.....</b>	<b>3-1</b>
3.1. Test Equipments .....	3-1
3.2. Block Diagram of Test Setup.....	3-1
3.3. Power Line Conducted Emission Test Limits .....	3-1
3.4. Configuration of EUT on Test .....	3-2
3.5. Operating Condition of EUT .....	3-2
3.6. Test Procedure .....	3-2
3.7. Power Line Conducted Emission Test Results .....	3-2
<b>4. RADIATED EMISSION TEST .....</b>	<b>4-1</b>
4.1. Test Equipment .....	4-1
4.2. Block Diagram of Test Setup.....	4-2
4.3. Radiated Emission Limit.....	4-3
4.4. 15.205 Restricted bands of operation .....	4-3
4.5. EUT Configuration on Test .....	4-3
4.6. Operating Condition of EUT .....	4-4
4.7. Test Procedure .....	4-4
4.8. Radiated Emission Test Results.....	4-4
<b>5. FREQUENCY STABILITY TEST .....</b>	<b>5-1</b>
5.1. Test Equipment .....	5-1
5.2. Limits .....	5-1
5.3. Test Procedure .....	5-1
5.4. Test result.....	5-2
<b>6. 20 DB BANDWIDTH TEST .....</b>	<b>6-1</b>
6.1. Test Equipment .....	6-1
6.2. Limit.....	6-1
6.3. Test Results.....	6-1
<b>7. DEVIATION TO TEST SPECIFICATIONS .....</b>	<b>7-1</b>
<b>8. PHOTOGRAPH OF TEST .....</b>	<b>8-1</b>
8.1. Photos of Power Line Conducted Emission Test.....	8-1
8.2. Photos of Radiated Emission Test .....	8-2
<b>9. PHOTOS OF THE EUT.....</b>	<b>9-1</b>

FCC ID: 2AF3K-SPD1

## TEST REPORT CERTIFICATION

Applicant : Square Inc.  
Manufacture : Square Inc.  
EUT Description : POS Terminal  
FCC ID : 2AF3K-SPD1  
(A) Model No. : SPD1-XX  
(B) Serial No. : N/A  
(C) Test Voltage : DC 20V From Adapter Input AC 120V/60Hz

Tested for comply with:  
FCC CFR 47 Part 15 Subpart C

Test procedure used:  
ANSI C63.10:2013

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements.


The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Date of Test : Sep.21~29, 2018 Report of date: Oct.12, 2018

Prepared by : Monica Liu Reviewer by : Sunny Lu  
Monica Liu / Assistant Sunny Lu / Deputy Manager

 信華科技(深圳)有限公司  
Audix Technology (Shenzhen) Co., Ltd.  
EMC 部門報告專用章

Stamp only for EMC Dept. Report

Approved &amp; Authorized Signer :

Signature: David Jin

David Jin / Manager

## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.10: 2013	PASS
Radiated Emission Test	FCC Part 15: 15.205, 15.209 FCC Part 15: 15.225(a)(b)(c)(d) ANSI C63.10: 2013	PASS
Frequency Stability Test	FCC Part 15: 15.225(e)	PASS
20dB Bandwidth Test	FCC Part 15: 15.215	PASS

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)


Product	: POS Terminal
Model No.	: SPD1-XX
FCC ID	: 2AF3K-SPD1
Radio	: IEEE802.11 a/b/g/n/ac; Bluetooth V3.0+EDR; Bluetooth V4.2; NFC
Operation Frequency	: IEEE 802.11a: 5180MHz—5240MHz; 5260MHz—5320MHz 5500MHz—5700MHz; 5745MHz—5825MHz IEEE 802.11ac VHT20: 5180MHz—5240MHz; 5260MHz—5320MHz 5500MHz—5700MHz; 5745MHz—5825MHz IEEE 802.11ac VHT40: 5190MHz—5230MHz; 5270MHz—5310MHz 5510MHz—5670MHz; 5755MHz—5795MHz IEEE 802.11ac VHT80: 5210MHz, 5290MHz; 5530MHz—5610MHz; 5775MHz IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE802.11nHT20: 2412MHz—2462MHz; 5180MHz—5240MHz; 5260MHz—5320MHz 5500MHz—5700MHz; 5745MHz—5825MHz IEEE802.11nHT40: 5190MHz—5230MHz; 5270MHz—5310MHz 5510MHz—5670MHz; 5755MHz—5795MHz Bluetooth : 2402-2480MHz NFC: 13.56MHz
Modulation Technology	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11a/g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT20, VHT40, VHT80: OFDM(16QAM, 64QAM, 256QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM,QPSK,BPSK) Bluetooth V3.0+EDR: GFSK, $\pi/4$ DQPSK,8-DPSK Bluetooth V4.2:GFSK NFC: ASK

Antenna Assembly Gain	: PIFA Antenna, Bluetooth: 1.99dBi WIFI 2.4GHz:ANT 0:1.99dBi; ANT 1: 4.06dBi WIFI 5GHz: Band 1: ANT 0: 3.07dBi; ANT 1: 5.05dBi Band 2: ANT 0: 3.07dBi; ANT 1: 5.05dBi Band 3: ANT 0: 3.38dBi; ANT 1: 6.18dBi Band 4: ANT 0: 2.96dBi; ANT 1: 6.58dBi
Applicant	: Square Inc. 1455 Market St. Suite 600 San Francisco, California United States 94103
Manufacturer	: Square Inc. 1455 Market St. Suite 600 San Francisco, California United States 94103
Factory	: Fu Tai Hua Industry (ShenZhen) Co., Ltd. 5/F, Building 11, G Area, No. 2, 2 <sup>nd</sup> Donghuan Road, Longhua District, Shenzhen, Guangdong Province, P.R. China
Rechargeable Li-ion Battery	: Manufacturer: Getac Technology(Kunshan) Co., Ltd. M/N: 2ICR19/66; Output: DC 7.2V, 3135mAh(22.57Wh).
Power Adapter	: Manufacturer: Dongguan Fuqiang Electronics Co., Ltd., M/N: SWD4-01; Input: 100-240V~, 50/60Hz, 1.4A; Output: 5V dc, 3.0A; 9V dc, 3.0A; 15V dc, 3.0A; 20V dc, 3.0A; Cable: Unshielded, Detachable, 1.2m
Accessory Hub	: Manufacturer: Square, Inc., M/N: SHD3-01; Cable: Unshielded, Detachable, 1.25m
Power Cable	: Unshielded, Detachable, 1.3m
Date of Test	: Sep.21~29, 2018
Date of Receipt	: Sep.15, 2018
Sample Type	: Prototype production

## 2.2. Tested Supporting System Details

[None]

## 2.3. Block diagram of connection between the EUT and simulators

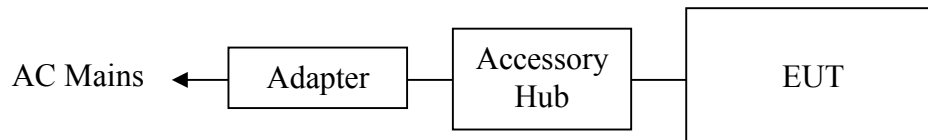

**(EUT: POS Terminal)**

## 2.4. Test Facility

Site Description  
Name of Firm

: Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Kefeng Road, Science & Technology  
Park, Nanshan District, Shenzhen,  
Guangdong, China

EMC Lab.

: Certificated by Industry Canada  
Registration Number: IC 5183A-1  
Valid Date: May.07, 2020

: Certificated by DAkkS, Germany  
Registration No: D-PL-12151-01-00  
Valid Date: Dec.07, 2021

Accredited by NVLAP, USA  
NVLAP Code: 200372-0  
Valid Date: Mar.31, 2018

**2.5. Measurement Uncertainty (95% confidence levels, k=2)**

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	3.6dB (150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	4.0dB(30~200MHz, Polarization: H)
	4.0dB(30~200MHz, Polarization: V)
	4.4dB(200M~1GHz, Polarization: H)
	4.4dB(200M~1GHz, Polarization: V)
Uncertainty for Frequency range test	$7 \times 10^{-8}$
Uncertainty for Bandwidth test	83 kHz
Uncertainty for DC power test	0.1 %
Uncertainty for test site temperature and humidity	0.6°C
	3%




### 3. POWER LINE CONDUCTED EMISSION TEST

#### 3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	May.17,18	1 Year
2.	Test Receiver	Rohde & Schwarz	ESCI	100842	Apr.23,18	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ENV216	102160	Jan.12.18	1 Year
4.	L.I.S.N.#2	Kyoritsu	K NW-403D	8-1750-2	Apr.23,18	1 Year
5.	Terminator	Hubersuhner	50Ω	No.1	Apr.23,18	1 Year
6.	Terminator	Hubersuhner	50Ω	No.2	Apr.23,18	1 Year
7.	RF Cable	Fujikura	RG55/U	No.2	Apr.23.18	1 Year
8.	Coaxial Switch	Anritsu	MP59B	6201397223	Apr.23,18	1 Year
9.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.

#### 3.2. Block Diagram of Test Setup

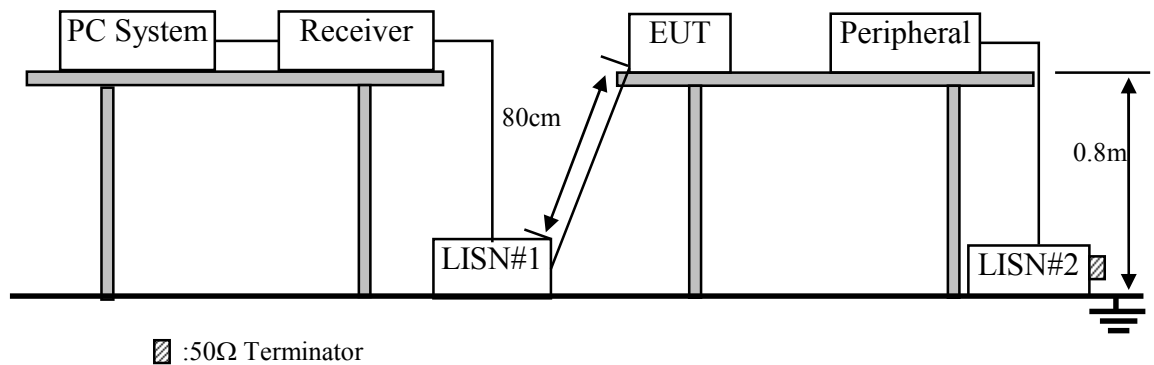

#### 3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

- Notes: 1. \* Decreasing linearly with logarithm of frequency.  
2. The lower limit shall apply at the transition frequencies.

### 3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

#### 3.4.1. POS Terminal (EUT)

Model Number : SPD1-01  
Serial Number : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

### 3.5. Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 3.2.

3.5.2. Turn on the power of all equipments.

3.5.3. PC run test software to control EUT work in Tx mode.

### 3.6. Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via PC connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 3.7. Power Line Conducted Emission Test Results


**PASS.** (All emissions not reported below are too low against the prescribed limits.)

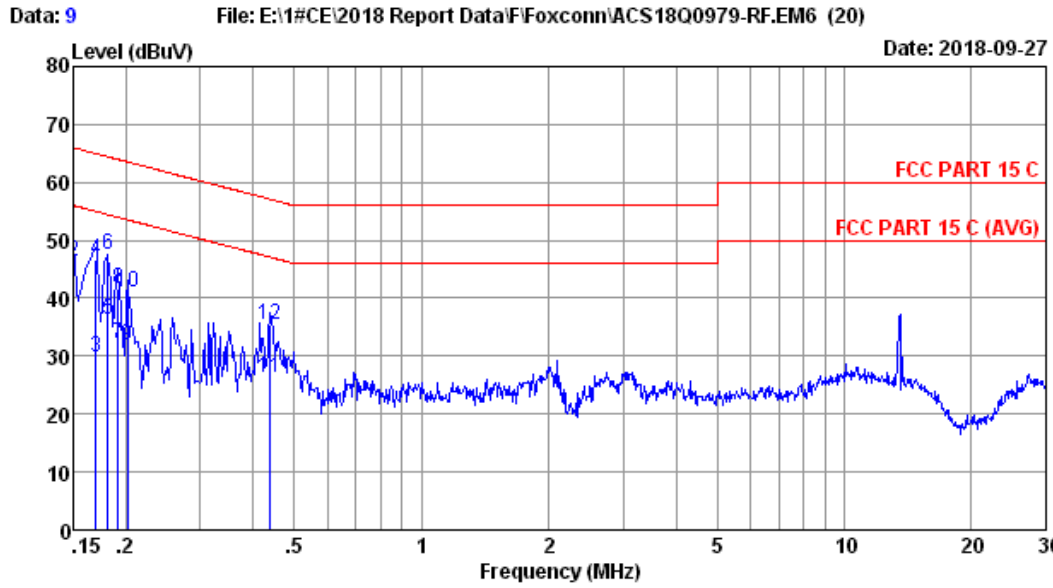

Site no :1# CE Data No :9  
 Dis./Lisn :2018 LISN ENV216-L  
 Limit :FCC PART 15 C  
 Env./Ins. :21.0°C/55% Engineer :Apple  
 EUT :POS Terminal M/N:SPD1-01  
 Power Rating :AC 120V/60Hz  
 Test Mode :NFC Mode

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	9.56	0.15	24.90	34.61	56.00	21.39	Average
2	0.150	9.56	0.15	36.56	46.27	66.00	19.73	QP
3	0.170	9.53	0.19	20.10	29.82	54.96	25.14	Average
4	0.170	9.53	0.19	37.00	46.72	64.96	18.24	QP
5	0.182	9.53	0.19	26.50	36.22	54.42	18.20	Average
6	0.182	9.53	0.19	37.82	47.54	64.42	16.88	QP
7	0.191	9.53	0.19	22.50	32.22	53.98	21.76	Average
8	0.191	9.53	0.19	31.78	41.50	63.98	22.48	QP
9	0.202	9.50	0.19	22.10	31.79	53.54	21.75	Average
10	0.202	9.50	0.19	31.49	41.18	63.54	22.36	QP
11	0.437	9.51	0.19	16.50	26.20	47.11	20.91	Average
12	0.437	9.51	0.19	25.72	35.42	57.11	21.69	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

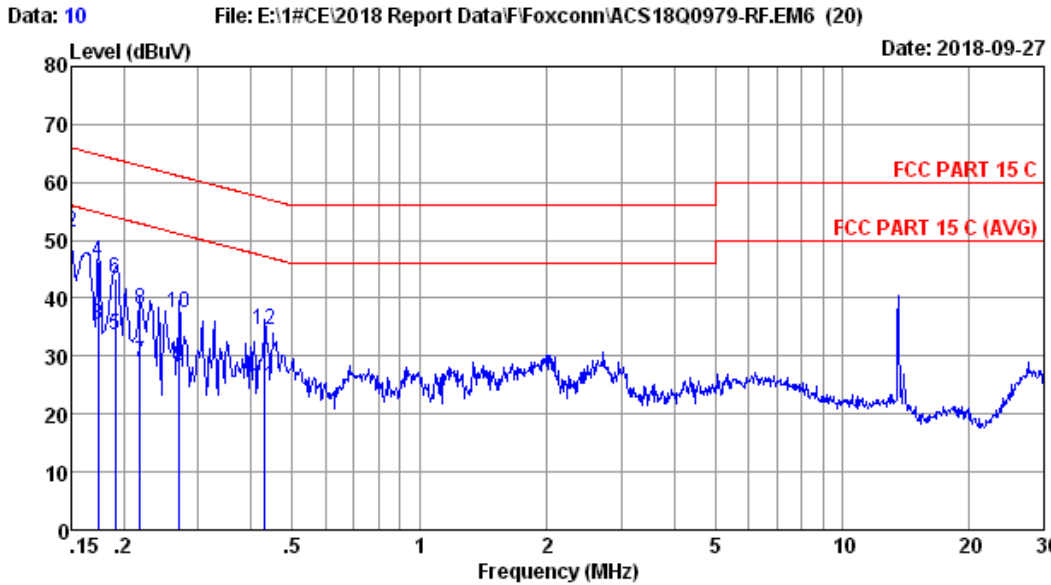

Site no :1# CE Data No :10  
 Dis./Lisn :2018 LISN ENV216-N  
 Limit :FCC PART 15 C  
 Env./Ins. :21.0°C/55% Engineer :Apple  
 EUT :POS Terminal M/N:SPD1-01  
 Power Rating :AC 120V/60Hz  
 Test Mode :NFC Mode

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	9.49	0.15	24.00	33.64	56.00	22.36	Average
2	0.150	9.49	0.15	41.70	51.34	66.00	14.66	QP
3	0.174	9.48	0.19	25.90	35.57	54.77	19.20	Average
4	0.174	9.48	0.19	36.78	46.45	64.77	18.32	QP
5	0.190	9.48	0.19	24.10	33.77	54.02	20.25	Average
6	0.190	9.48	0.19	33.69	43.36	64.02	20.66	QP
7	0.219	9.47	0.19	19.20	28.86	52.88	24.02	Average
8	0.219	9.47	0.19	28.55	38.21	62.88	24.67	QP
9	0.270	9.45	0.19	18.60	28.24	51.12	22.88	Average
10	0.270	9.45	0.19	27.78	37.42	61.12	23.70	QP
11	0.431	9.41	0.19	15.20	24.80	47.24	22.44	Average
12	0.431	9.41	0.19	24.83	34.43	57.24	22.81	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

## 4. RADIATED EMISSION TEST

### 4.1. Test Equipment

Frequency Range: 30-1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	Jun.19,18	1 Year
2.	Signal Analyzer	Rohde & Schwarz	FSV30	104051	Apr.23,18	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR7	101547	Apr.23,18	1 Year
4.	Amplifier	HP	8447D	2648A04738	Apr.23,18	1 Year
5.	Tri-log-Broadband Antenna	Schwarzbeck	VULB 9168	710	Aug.22,18	1 Year
6.	RF Cable	SPUMA	CFD400NL-LW	No.3	Sep.02,18	1 Year
7.	Coaxial Switch	Anritsu	MP59B	6201397222	Apr.23,18	1 Year
8.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A

Note: N/A means Not applicable.


Frequency Range: 1.705-30MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	10m Chamber	AUDIX	N/A	N/A	Apr.15,18	1 Year
2.	Signal Analyzer	Rohde & Schwarz	FSV30	103670	Oct.15,17	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR3	101931	Apr.23,18	1 Year
4.	Amplifier	EMCI	EMC9135	980347	Sep.02,18	1 Year
5.	Loop Antenna	Chase	HLA6120	1062	Oct.17,17	1 Year
6.	RF Cable	SPUMA	CFD400NL-LW	No.4	Sep.02,18	1 Year
7.	Coaxial Switch	Anritsu	MP59B	6201397221	Apr.23,18	1 Year
8.	Coaxial Switch	Anritsu	MP59B	6201397220	Apr.23,18	1 Year
9.	Test Software	AUDIX	e3	6.100913a	N/A	N/A


Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup

Frequency Range: 30-1000MHz

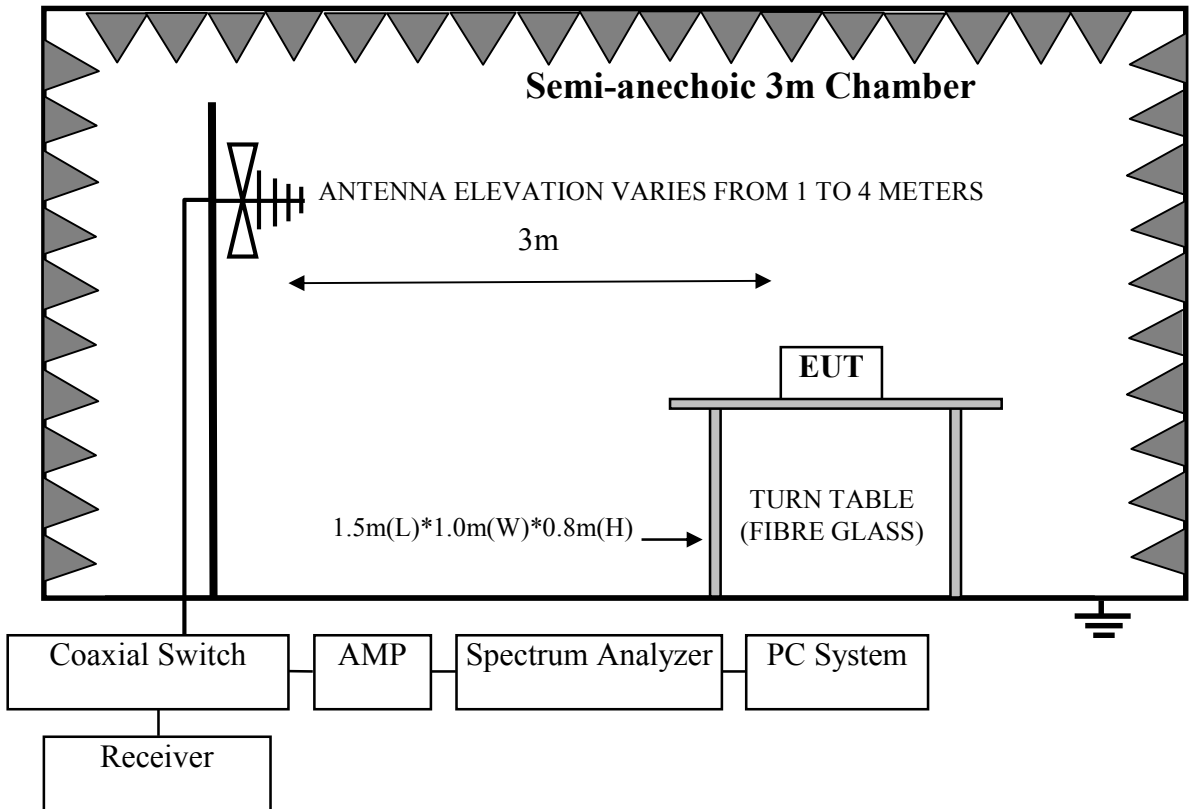

Frequency Range: 1.705-30MHz

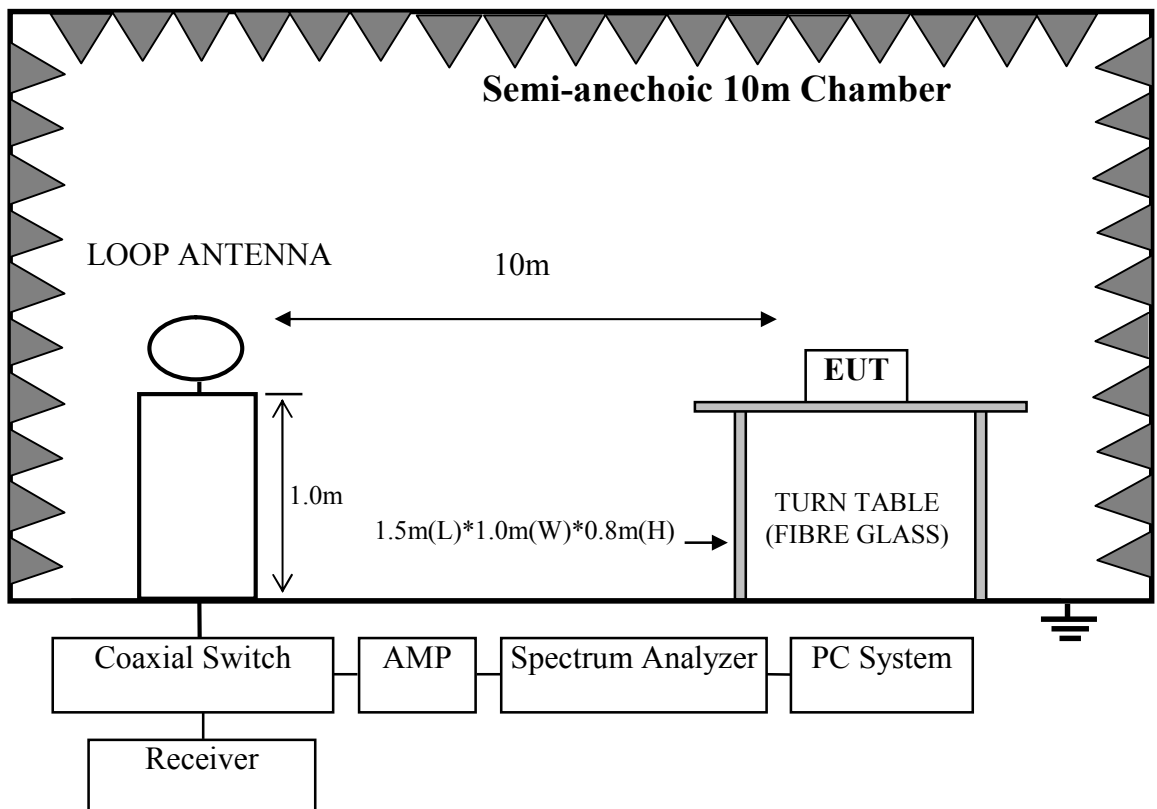

### 4.3. Radiated Emission Limit

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Remark : (1) Emission level dBμV = 20 log Emission level μV/m

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

### 4.4. 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

### 4.5. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 4.6. Operating Condition of EUT

4.6.1. Setup the EUT as shown in Section 4.2.

4.6.2. Turn on the power of all equipments.

4.6.3. Let the EUT worked in test mode (Tx Mode) and tested it.

#### 4.7. Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 10 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

For frequency range below 30MHz the Loop antenna was used at 10m measurement distance with antenna heights of 1m and antenna loop front and side faced to the EUT. The axis of the antenna was rotated to maximize the emission. A CISPR quasi-peak detector is used for measurements below 30MHz and RBW/VBW is 9kHz/30kHz.

The limit 1.705MHz to 30MHz in clause 4.3 are specified at 30 meters, and measurements were made at 10 meters, the limit is translated to 10 meters by using a formula as follows:  
$$\text{Limit}_{30\text{m}} = \text{Limit}_{10\text{m}} + 40\log(30\text{m}/10)$$


#### 4.8. Radiated Emission Test Results

**PASS.**

The frequency range from 30MHz to 1000MHz and 1.705MHz to 30MHz is investigated. Please see the following pages.

Note: According to exploratory test, 9kHz to 1.705MHz no obvious signal can be detected.




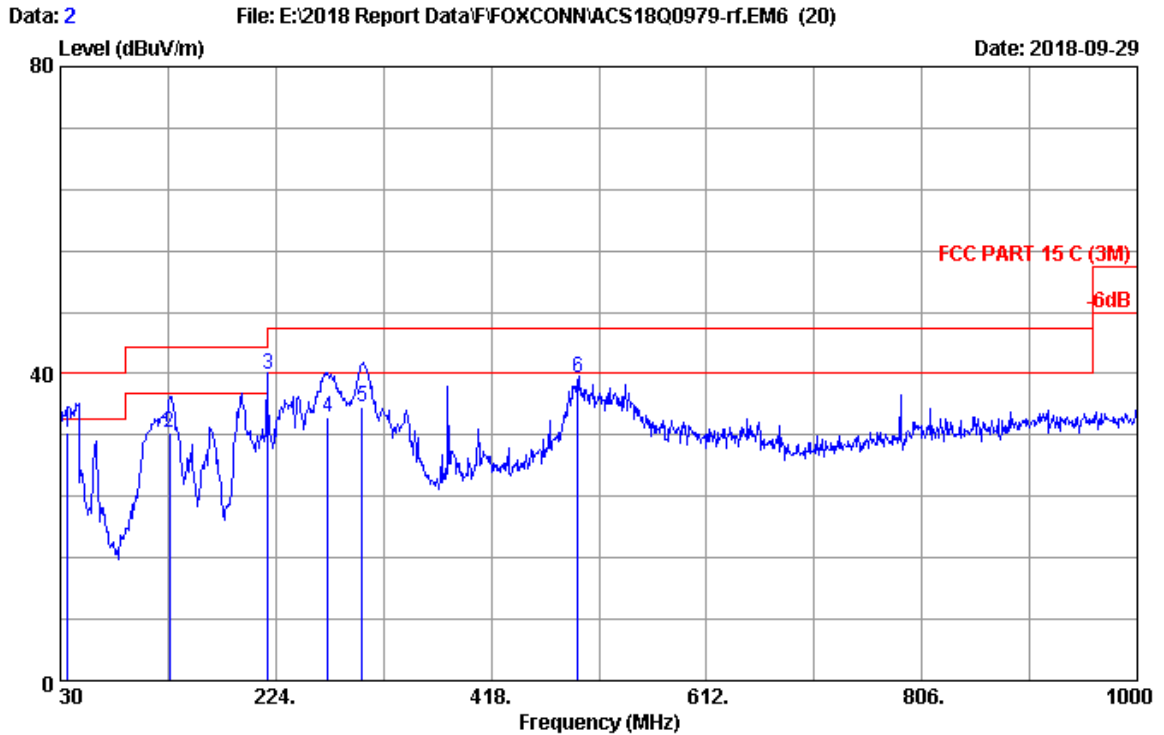

Site no. : 3m Chamber Data no. : 2  
 Dis. / Ant. : 3m 2018 VULB 9168-710 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 22.7C/52% Engineer : Lynn  
 EUT : POS Terminal M/N:SPD1-01  
 Power rating : AC 120V/60Hz  
 Test Mode : NFC Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	36.214	19.58	0.63	12.14	32.35	40.00	7.65	QP
2	128.350	17.66	1.24	13.50	32.40	43.50	11.10	QP
3	216.940	16.97	1.81	21.00	39.78	46.00	6.22	QP
4	271.320	18.89	2.24	13.24	34.37	46.00	11.63	QP
5	302.140	19.87	2.48	13.24	35.59	46.00	10.41	QP
6	496.350	23.83	3.36	12.20	39.39	46.00	6.61	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

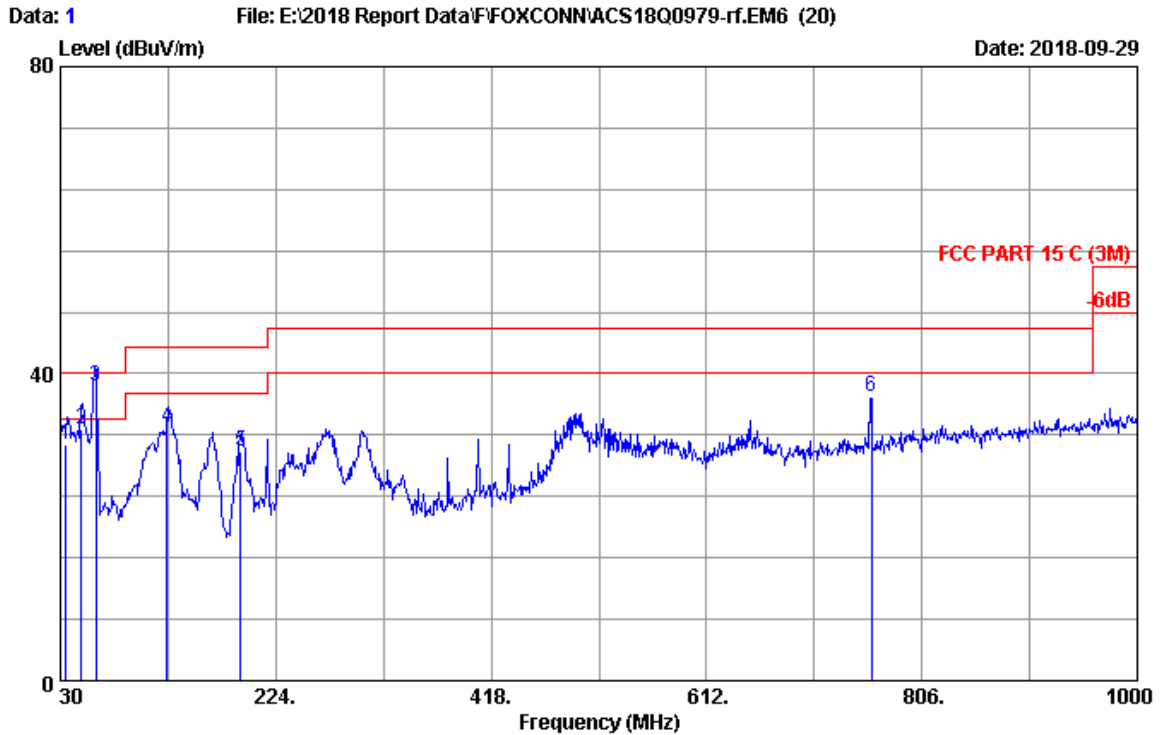

Site no. : 3m Chamber Data no. : 1  
 Dis. / Ant. : 3m 2018 VULB 9168-710 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 22.7C/52% Engineer : Lynn  
 EUT : POS Terminal M/N:SPD1-01  
 Power rating : AC 120V/60Hz  
 Test Mode : NFC Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	35.210	19.50	0.62	10.61	30.73	40.00	9.27	QP
2	49.250	20.26	0.75	11.70	32.71	40.00	7.29	QP
3	61.950	19.42	0.81	18.10	38.33	40.00	1.67	QP
4	126.250	17.42	1.23	14.30	32.95	43.50	10.55	QP
5	192.380	17.84	1.62	10.50	29.96	43.50	13.54	QP
6	760.320	27.84	4.59	4.50	36.93	46.00	9.07	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

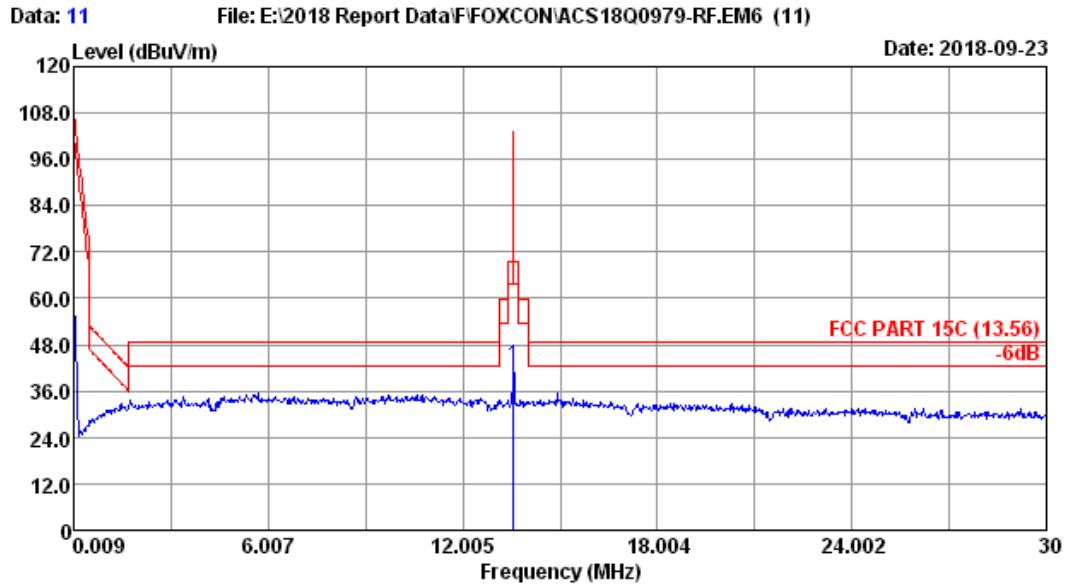

Site no. : 10m Chamber Data no. : 11  
 Dis. / Ant. : 10m 2018 6120 LOOP 10M Ant. pol. : VERTICAL  
 Limit : FCC PART 15C (13.56)  
 Env. / Ins. : 23.2\*C/55% Engineer : Habit  
 EUT : POS Terminal M/N:SPD1-01  
 Power rating : AC 120V/60Hz  
 Test Mode : NFC Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	13.56	20.23	0.84	21.50	42.57	103.08	60.51	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 5. FREQUENCY STABILITY TEST

### 5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Sep.08,18	1Year
2.	RF Cable	Hubersuhner	RF Cable	No.5	Oct.15,17	1 Year

### 5.2. Limits

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 5.3. Test Procedure

The EUT was placed in an environmental test chamber and powered such that control element received normal voltage and the transmitter provided maximum RF output.

5.4. Test result

EUT: POS Terminal		
M/N: SPD1-01		
Test date: 2018-09-25	Pressure: 102.1±1.0 kpa	Humidity: 52.2±3.0%
Tested by: Lynn	Test site: RF site	Temperature:22.5±0.6 °C

Frequency stability VS Voltage (Temperature: 20°C)					
Test Voltage	Temperature	Frequency (MHz)	Max. Reading (MHz)	Result (%)	Limit (%)
AC 102V	20°C	13.56	13.56015	0.001	±0.01
AC 120V	20°C	13.56	13.5602	0.001	±0.01
AC 138V	20°C	13.56	13.5603	0.002	±0.01
Frequency stability VS Voltage (Supply voltage 120V)					
AC 120V	0°C	13.56	13.5602	0.001	±0.01
AC 120V	10°C	13.56	13.56015	0.001	±0.01
AC 120V	20°C	13.56	13.5603	0.002	±0.01
AC 120V	30°C	13.56	13.5603	0.002	±0.01
AC 120V	40°C	13.56	13.5605	0.004	±0.01
Conclusion: PASS					

## 6. 20 DB BANDWIDTH TEST

### 6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Sep.08,18	1Year
2.	RF Cable	Hubersuhner	RF Cable	No.5	Oct.15,17	1 Year

### 6.2.Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


### 6.3. Test Results

EUT: POS Terminal		
M/N: SPD1-01		
Test date: 2018-09-21	Pressure: 102.1±1.0 kpa	Humidity: 51.1±3.0%
Tested by: Lynn	Test site: RF site	Temperature:22.8±0.6 °C

Frequency	20dB bandwidth ( kHz )	Limit (KHz)
13.56MHz	166.2	N/A

Conclusion : PASS

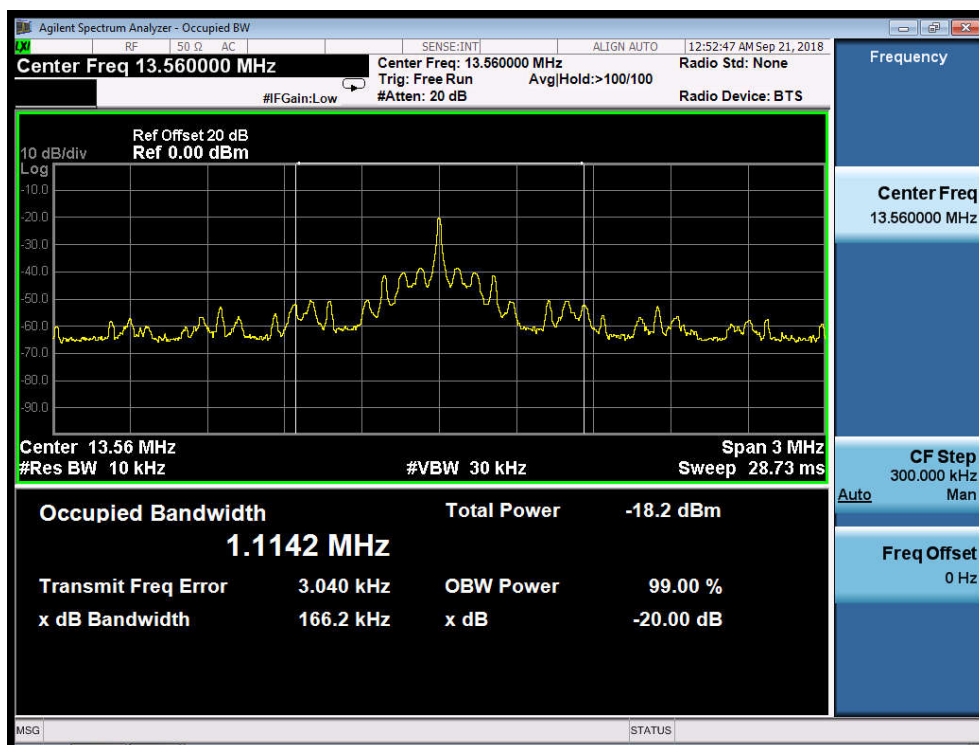

## 7. DEVIATION TO TEST SPECIFICATIONS

[NONE]