


FCC Test Report

FCC ID : 2AF4TWSMS116
Equipment : RFID IOT Node Adapter
Model No. : WSMS-116_AS
Brand Name : Synin
Applicant : Synin Corporation
Address : 2F., No.14, Ln.123, Sec.6, Minquan E. Rd.,
Neihu Dist., Taipei City 11490, Taiwan (R.O.C)
Standard : 47 CFR FCC Part 15.247
Received Date : Oct. 16, 2015
Tested Date : Nov. 25 ~ Dec. 02, 2015

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	9
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS.....	11
3.1	Conducted Emissions.....	11
3.2	6dB and Occupied Bandwidth	24
3.3	RF Output Power	27
3.4	Power Spectral Density	29
3.5	Unwanted Emissions into Restricted Frequency Bands	31
3.6	Emissions in Non-Restricted Frequency Bands.....	51
4	TEST LABORATORY INFORMATION	54

Release Record

Report No.	Version	Description	Issued Date
FR561003-01-2	Rev. 01	Initial issue	Dec. 15, 2015

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 21.050MHz 27.70 (Margin -22.30dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 49.40MHz 36.53 (Margin -3.47dB) - PK	Pass
15.247(b)(3)	Maximum Output Power	Max Power [dBm]: 19.62	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information						
Frequency Range (MHz)	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate (bit/sec)	Spread Factor	Channel Spacing (kHz)
902 ~ 928	903 ~ 924	5 ~ 86 [10]	1	1172 ~ 21875	12 ~ 7	500
Note 1: RF output power specifies that Maximum Conducted (Average) Output Power.						
Note 2: The device uses CSS modulation.						

1.1.2 Antenna Details

Ant. No.	Brand	Model	Type	Gain (dBi)	Connector	Remark
1	TSKY Co., Ltd.	A8-A003-00106	Dipole	0	SMA	---

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	12Vdc from AC adapter 24Vdc from DC power supply
-------------------	---

1.1.4 Support Unit

Support Unit		
No.	Equipment	Description
1	AC adapter	Brand: OEM Model: ADS0128-W 120100 Power Rating: I/P: 100-240Vac, 50-60Hz, 0.5A O/P: 12.0Vdc, 1.0A DC 1.5m non-shielded cable without core

Note: Support unit listed above was supplied by applicant.

1.1.5 Channel List

Frequency band (MHz)		902 ~ 928	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
5	903	50	911
14	904.6	59	912.6
23	906.2	68	914.2
32	907.8	79	922
41	909.4	86	924

1.1.6 Test Tool and Duty Cycle

Test Tool	Putty, Ver. 0.60.0.0	
Duty Cycle and Duty Factor	Duty cycle (%)	Duty factor (dB)
	100%	0



1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)	Power Set
CSS	903	20
	909.4	20
	924	20

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	---	---	---	---	---

1.3 Test Setup Chart

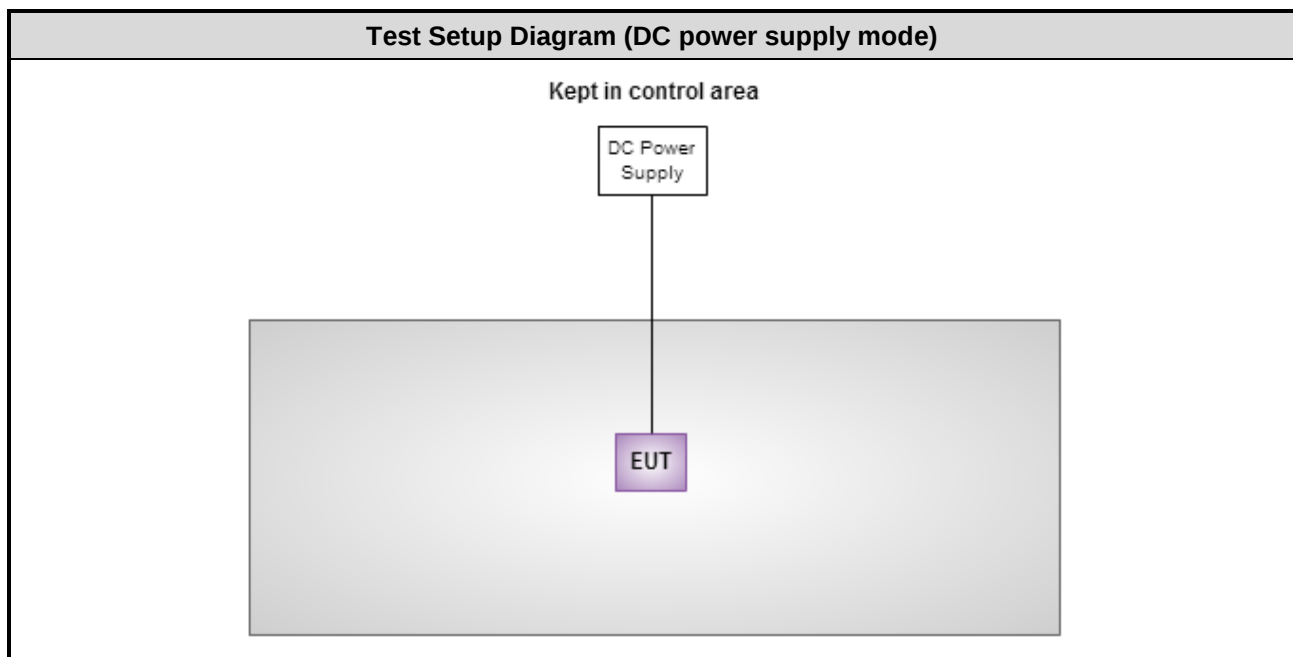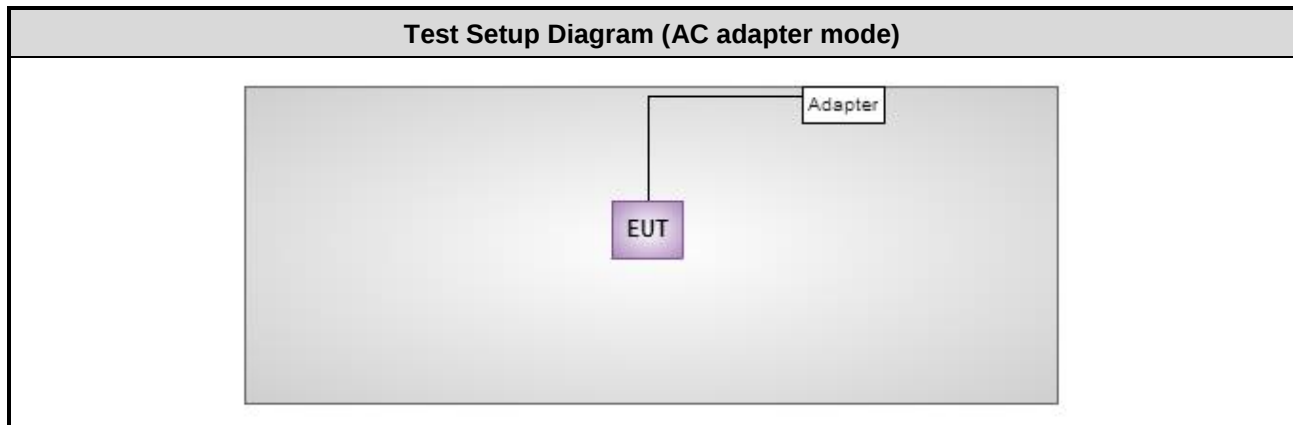

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 21, 2015	Oct. 20, 2016
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 13, 2015	Nov. 12, 2016
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 31, 2014	Dec. 30, 2015
DC POWER SOURCE	GW INSTEK	GPC-3060D	EM884797	Oct. 20, 2015	Oct. 19, 2016
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 09, 2014	Dec. 08, 2015
Receiver	R&S	ESR3	101658	Nov. 04, 2015	Nov. 03, 2016
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Aug. 20, 2015	Aug. 19, 2016
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 11, 2014	Dec. 10, 2015
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 04, 2015	Nov. 03, 2016
Loop Antenna	R&S	HFH2-Z2	11900	Nov. 16, 2015	Nov. 15, 2016
Preamplifier	Burgeon	BPA-530	SN:100219	Sep. 10, 2015	Sep. 09, 2016
Preamplifier	Agilent	83017A	MY39501308	Oct. 02, 2015	Oct. 01, 2016
Preamplifier	EMC	EMC184045B	980192	Sep. 01, 2015	Aug. 31, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 15, 2014	Dec. 14, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 15, 2014	Dec. 14, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 15, 2014	Dec. 14, 2015
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 15, 2014	Dec. 14, 2015
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 15, 2014	Dec. 14, 2015
DC POWER SOURCE	GW INSTEK	GPC-3060D	EM884797	Oct. 20, 2015	Oct. 19, 2016
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Feb. 03, 2015	Feb. 02, 2016
Power Meter	Anritsu	ML2495A	1241002	Sep. 21, 2015	Sep. 20, 2016
Power Sensor	Anritsu	MA2411B	1207366	Sep. 21, 2015	Sep. 20, 2016
Signal Generator	R&S	SMB100A	175727	Oct. 05, 2015	Oct. 04, 2016
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 DTS Meas Guidance v03r03

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.134 Hz
Conducted power	±0.808 dB
Power density	±0.463 dB
Conducted emission	±2.670 dB
AC conducted emission	±2.90 dB
Radiated emission ≤ 1GHz	±3.72 dB
Radiated emission > 1GHz	±5.65 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 59%	Peter Lin
Radiated Emissions	03CH01-WS	21-23°C / 61-65%	Aska Huang Warren Lee
RF Conducted	TH01-WS	22°C / 64%	Alex Huang

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

Test item	Test Frequency (MHz)	Modulation / SF	Test Configuration
Conducted Emissions	903 / 909.4 / 924	CSS / 12	1, 2
Radiated Emissions ≤1GHz	903 / 909.4 / 924	CSS / 12	1, 2
Radiated Emissions >1GHz Maximum Output Power 6dB bandwidth Power spectral density	903 / 909.4 / 924	CSS / 12	1

NOTE:

- The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.
- The EUT had been tested by following test configurations.
 - Configuration 1 : AC Adapter mode
 - Configuration 2 : DC Power Supply mode

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.


3.1.3 Test Setup



- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions


Modulation / SF	CSS / 12	Test Freq. (MHz)	903
Power Phase	Line	Test Configuration	1

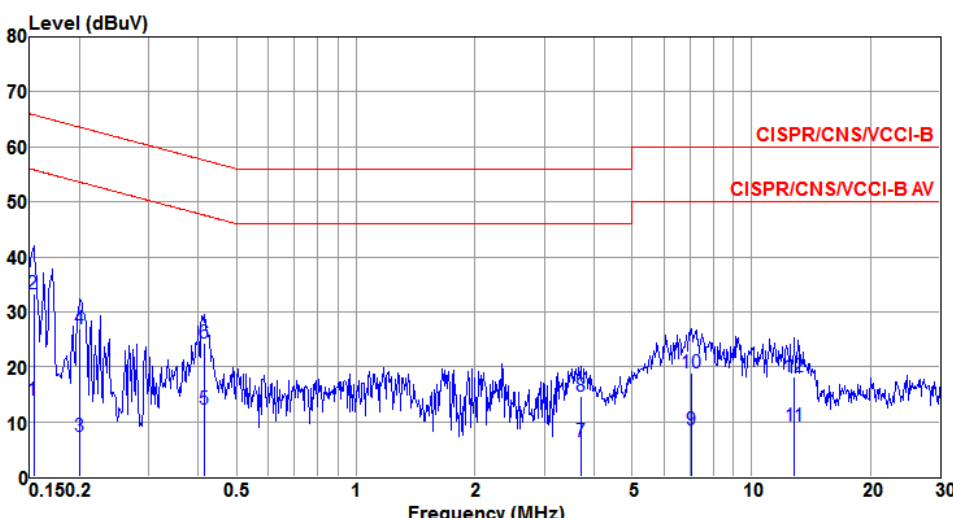

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.153	13.86	55.82	-41.96	13.78	0.00	0.08	Average
2	0.153	33.29	65.82	-32.53	33.21	0.00	0.08	QP
3	0.201	7.29	53.58	-46.29	7.20	0.00	0.09	Average
4	0.201	26.83	63.58	-36.75	26.74	0.00	0.09	QP
5	0.415	12.24	47.55	-35.31	12.13	0.00	0.11	Average
6	0.415	24.43	57.55	-33.12	24.32	0.00	0.11	QP
7	3.700	6.45	46.00	-39.55	6.15	0.00	0.30	Average
8	3.700	14.72	56.00	-41.28	14.42	0.00	0.30	QP
9	7.062	8.47	50.00	-41.53	8.17	0.00	0.30	Average
10	7.062	18.99	60.00	-41.01	18.69	0.00	0.30	QP
11	12.852	9.14	50.00	-40.86	8.90	0.00	0.24	Average
12	12.852	18.16	60.00	-41.84	17.92	0.00	0.24	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	903
Power Phase	Neutral	Test Configuration	1

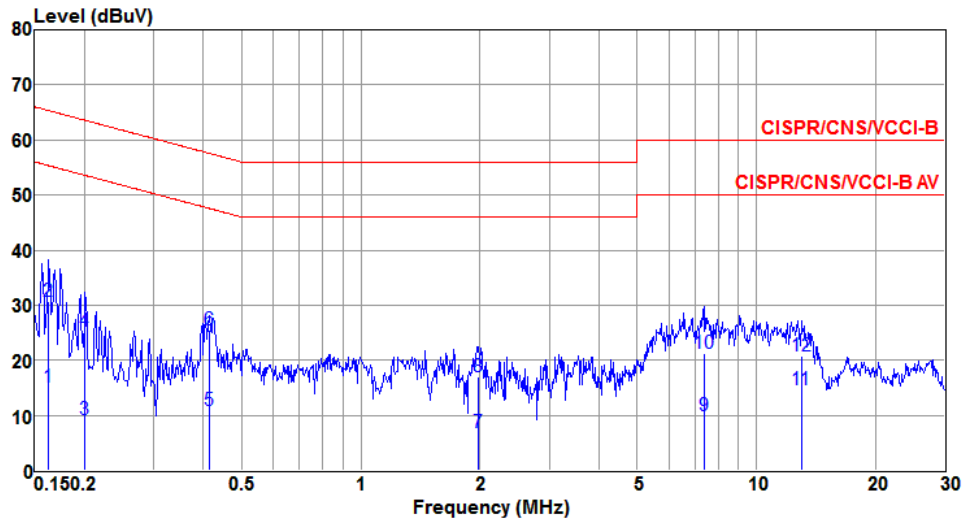

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.162	15.03	55.34	-40.31	14.95	0.00	0.08	Average
2	0.162	30.79	65.34	-34.55	30.71	0.00	0.08	QP
3	0.201	9.27	53.58	-44.31	9.18	0.00	0.09	Average
4	0.201	25.37	63.58	-38.21	25.28	0.00	0.09	QP
5	0.413	10.87	47.59	-36.72	10.76	0.00	0.11	Average
6	0.413	25.56	57.59	-32.03	25.45	0.00	0.11	QP
7	1.980	6.75	46.00	-39.25	6.51	0.00	0.24	Average
8	1.980	17.10	56.00	-38.90	16.86	0.00	0.24	QP
9	7.407	9.81	50.00	-40.19	9.51	0.00	0.30	Average
10	7.407	21.22	60.00	-38.78	20.92	0.00	0.30	QP
11	12.988	14.54	50.00	-35.46	14.30	0.00	0.24	Average
12	12.988	20.72	60.00	-39.28	20.48	0.00	0.24	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	909.4
Power Phase	Line	Test Configuration	1

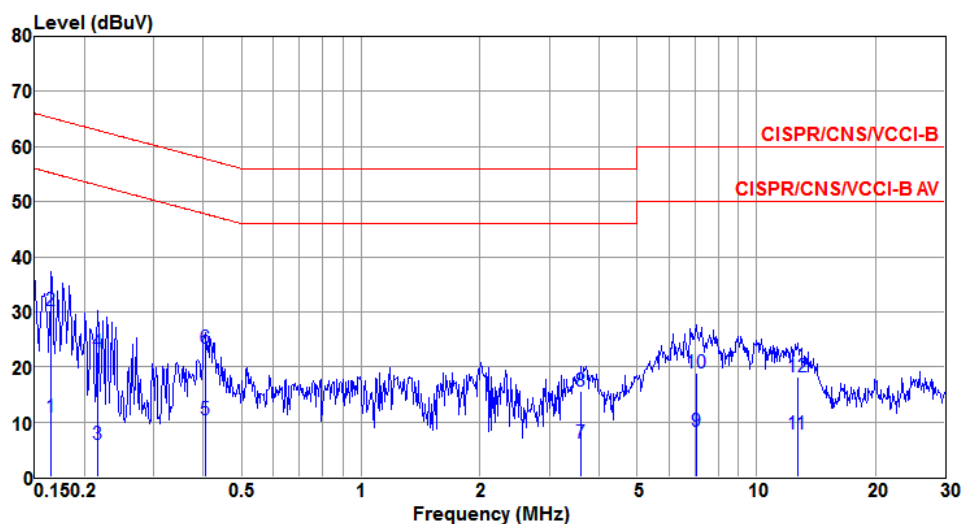

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.165	10.90	55.21	-44.31	10.82	0.00	0.08	Average
2	0.165	30.29	65.21	-34.92	30.21	0.00	0.08	QP
3	0.216	5.81	52.96	-47.15	5.72	0.00	0.09	Average
4	0.216	22.64	62.96	-40.32	22.55	0.00	0.09	QP
5	0.404	10.33	47.77	-37.44	10.22	0.00	0.11	Average
6	0.404	23.38	57.77	-34.39	23.27	0.00	0.11	QP
7	3.603	6.05	46.00	-39.95	5.75	0.00	0.30	Average
8	3.603	15.70	56.00	-40.30	15.40	0.00	0.30	QP
9	7.062	8.38	50.00	-41.62	8.08	0.00	0.30	Average
10	7.062	18.90	60.00	-41.10	18.60	0.00	0.30	QP
11	12.716	7.81	50.00	-42.19	7.57	0.00	0.24	Average
12	12.716	18.22	60.00	-41.78	17.98	0.00	0.24	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	909.4
Power Phase	Neutral	Test Configuration	1

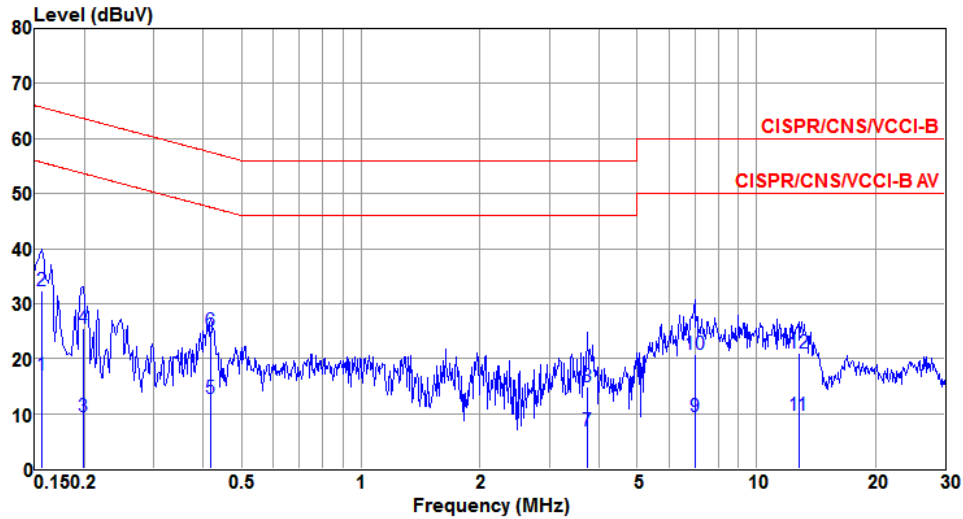

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line dBuV	Limit dB	Level dBuV	factor dB	loss dB	
1	0.156	16.96	55.65	-38.69	16.88	0.00	0.08	Average
2	0.156	32.36	65.65	-33.29	32.28	0.00	0.08	QP
3	0.199	9.52	53.67	-44.15	9.43	0.00	0.09	Average
4	0.199	25.47	63.67	-38.20	25.38	0.00	0.09	QP
5	0.417	12.70	47.51	-34.81	12.59	0.00	0.11	Average
6	0.417	24.98	57.51	-32.53	24.87	0.00	0.11	QP
7	3.740	6.90	46.00	-39.10	6.60	0.00	0.30	Average
8	3.740	14.91	56.00	-41.09	14.61	0.00	0.30	QP
9	6.988	9.48	50.00	-40.52	9.18	0.00	0.30	Average
10	6.988	20.78	60.00	-39.22	20.48	0.00	0.30	QP
11	12.784	9.75	50.00	-40.25	9.51	0.00	0.24	Average
12	12.784	20.92	60.00	-39.08	20.68	0.00	0.24	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	924
Power Phase	Line	Test Configuration	1

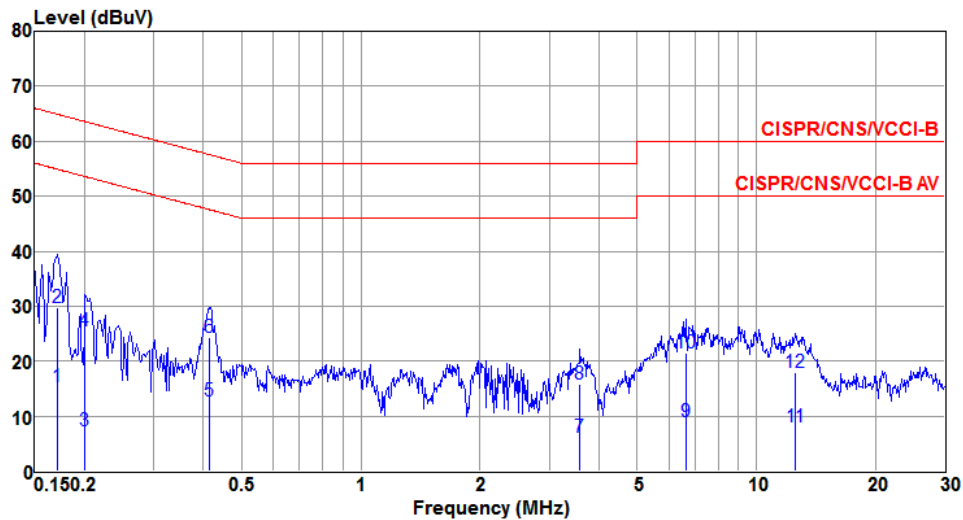

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.171	15.40	54.90	-39.50	15.32	0.00	0.08	Average
2	0.171	29.80	64.90	-35.10	29.72	0.00	0.08	QP
3	0.201	7.33	53.58	-46.25	7.24	0.00	0.09	Average
4	0.201	25.41	63.58	-38.17	25.32	0.00	0.09	QP
5	0.413	12.68	47.59	-34.91	12.57	0.00	0.11	Average
6	0.413	24.38	57.59	-33.21	24.27	0.00	0.11	QP
7	3.584	6.08	46.00	-39.92	5.78	0.00	0.30	Average
8	3.584	15.75	56.00	-40.25	15.45	0.00	0.30	QP
9	6.627	8.94	50.00	-41.06	8.64	0.00	0.30	Average
10	6.627	21.40	60.00	-38.60	21.10	0.00	0.30	QP
11	12.582	7.95	50.00	-42.05	7.71	0.00	0.24	Average
12	12.582	17.91	60.00	-42.09	17.67	0.00	0.24	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	924
Power Phase	Neutral	Test Configuration	1

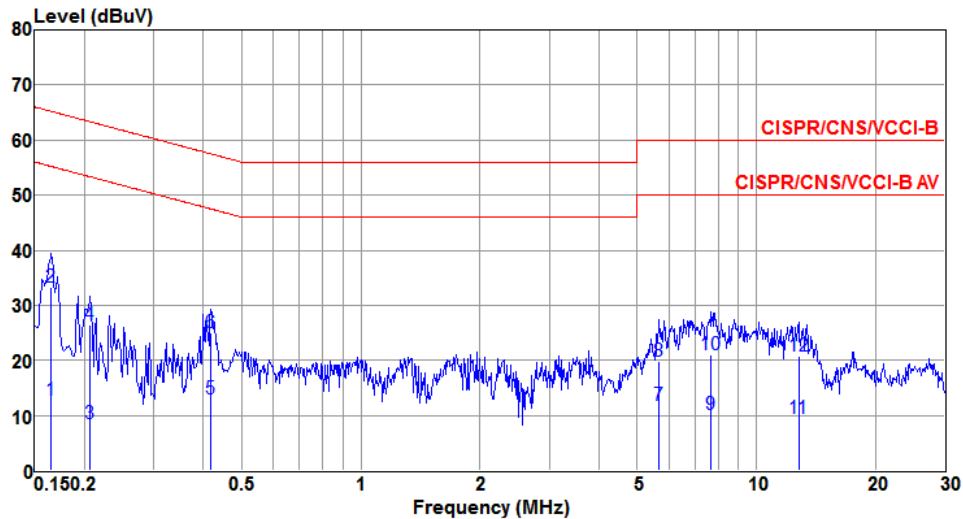

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.165	12.65	55.21	-42.56	12.57	0.00	0.08	Average
2@	0.165	33.20	65.21	-32.01	33.12	0.00	0.08	QP
3	0.207	8.58	53.32	-44.74	8.49	0.00	0.09	Average
4	0.207	26.47	63.32	-36.85	26.38	0.00	0.09	QP
5	0.417	12.87	47.51	-34.64	12.76	0.00	0.11	Average
6	0.417	24.94	57.51	-32.57	24.83	0.00	0.11	QP
7	5.683	11.73	50.00	-38.27	11.42	0.00	0.31	Average
8	5.683	19.81	60.00	-40.19	19.50	0.00	0.31	QP
9	7.687	10.22	50.00	-39.78	9.92	0.00	0.30	Average
10	7.687	20.90	60.00	-39.10	20.60	0.00	0.30	QP
11	12.784	9.46	50.00	-40.54	9.22	0.00	0.24	Average
12	12.784	20.84	60.00	-39.16	20.60	0.00	0.24	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	903
Power Phase	Line	Test Configuration	2

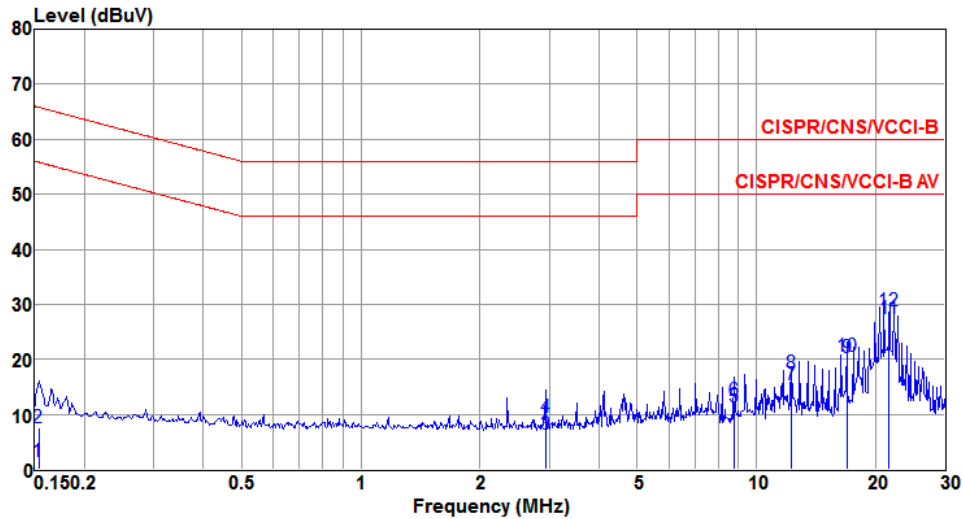

	Freq	Level	Limit	Over	Read	LISN	cable	
	MHz	dBuV	Line	Limit	Level	factor	loss	Remark
			dBuV	dB	dBuV	dB	dB	
1	0.153	1.34	55.82	-54.48	1.15	0.11	0.08	Average
2	0.153	7.60	65.82	-58.22	7.41	0.11	0.08	QP
3	2.925	6.39	46.00	-39.61	5.93	0.18	0.28	Average
4	2.925	9.53	56.00	-46.47	9.07	0.18	0.28	QP
5	8.770	11.28	50.00	-38.72	10.75	0.23	0.30	Average
6	8.770	12.56	60.00	-47.44	12.03	0.23	0.30	QP
7	12.281	15.40	50.00	-34.60	14.87	0.28	0.25	Average
8	12.281	17.52	60.00	-42.48	16.99	0.28	0.25	QP
9	16.956	20.22	50.00	-29.78	19.76	0.34	0.12	Average
10	16.956	20.45	60.00	-39.55	19.99	0.34	0.12	QP
11@	21.634	27.39	50.00	-22.61	26.95	0.39	0.05	Average
12	21.634	28.75	60.00	-31.25	28.31	0.39	0.05	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	903
Power Phase	Neutral	Test Configuration	2

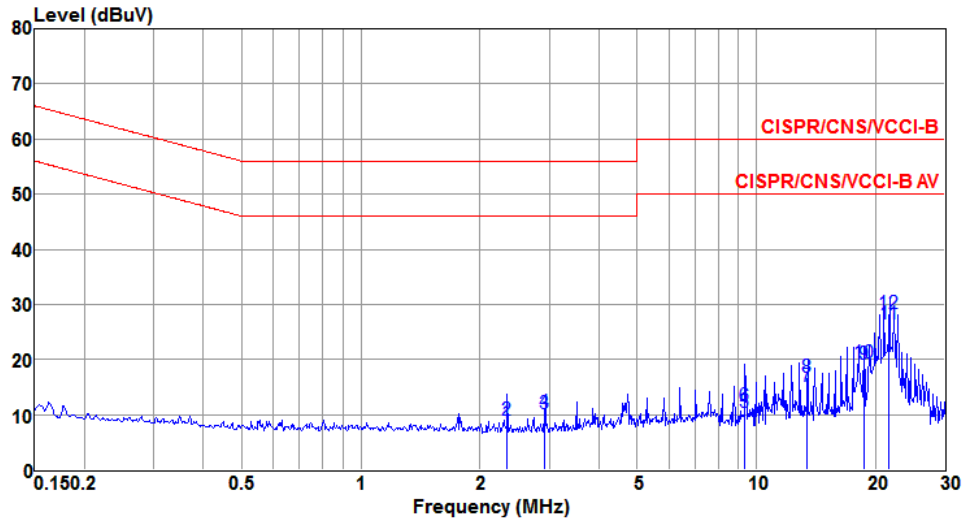

	Freq	Level	Limit	Over	Read	LISN	cable	
	MHz	dBuV	Line	Limit	Level	factor	loss	Remark
			dBuV	dB	dBuV	dB	dB	
1	2.336	8.58	46.00	-37.42	8.15	0.17	0.26	Average
2	2.336	9.01	56.00	-46.99	8.58	0.17	0.26	QP
3	2.924	10.06	46.00	-35.94	9.61	0.17	0.28	Average
4	2.924	10.32	56.00	-45.68	9.87	0.17	0.28	QP
5	9.352	10.41	50.00	-39.59	9.85	0.26	0.30	Average
6	9.352	11.47	60.00	-48.53	10.91	0.26	0.30	QP
7	13.451	15.11	50.00	-34.89	14.55	0.33	0.23	Average
8	13.451	16.68	60.00	-43.32	16.12	0.33	0.23	QP
9	18.713	19.02	50.00	-30.98	18.57	0.39	0.06	Average
10	18.713	19.38	60.00	-40.62	18.93	0.39	0.06	QP
11@	21.636	26.43	50.00	-23.57	25.96	0.42	0.05	Average
12	21.636	28.44	60.00	-31.56	27.97	0.42	0.05	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	909.4
Power Phase	Line	Test Configuration	2

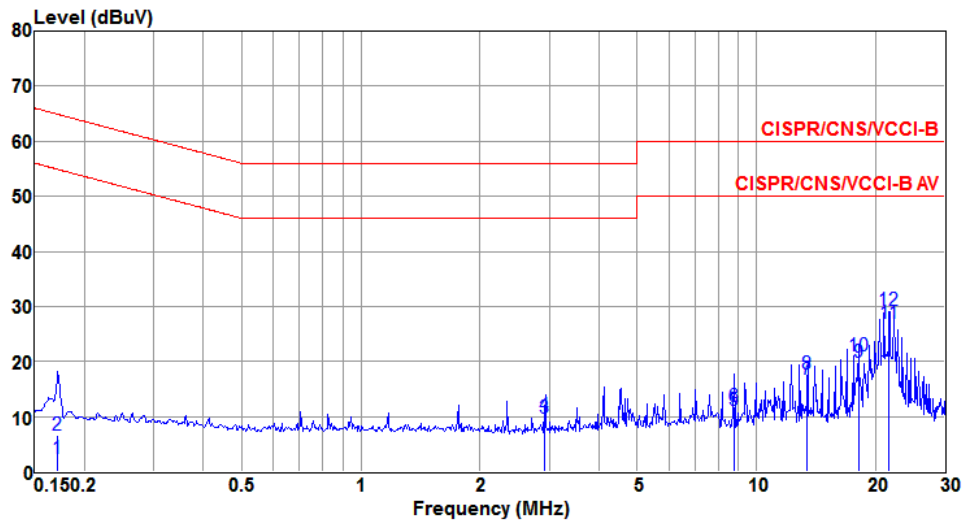

	Freq	Level	Limit	Over	Read	LISN	cable	
	MHz	dBuV	Line	Limit	Level	factor	loss	Remark
			dBuV	dB	dBuV	dB	dB	
1	0.171	2.28	54.90	-52.62	2.09	0.11	0.08	Average
2	0.171	6.59	64.90	-58.31	6.40	0.11	0.08	QP
3	2.924	9.78	46.00	-36.22	9.32	0.18	0.28	Average
4	2.924	10.07	56.00	-45.93	9.61	0.18	0.28	QP
5	8.771	11.00	50.00	-39.00	10.47	0.23	0.30	Average
6	8.771	11.77	60.00	-48.23	11.24	0.23	0.30	QP
7	13.448	16.66	50.00	-33.34	16.13	0.30	0.23	Average
8	13.448	17.70	60.00	-42.30	17.17	0.30	0.23	QP
9	18.123	19.94	50.00	-30.06	19.51	0.35	0.08	Average
10	18.123	20.97	60.00	-39.03	20.54	0.35	0.08	QP
11@	21.632	26.95	50.00	-23.05	26.51	0.39	0.05	Average
12	21.632	29.31	60.00	-30.69	28.87	0.39	0.05	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	909.4
Power Phase	Neutral	Test Configuration	2

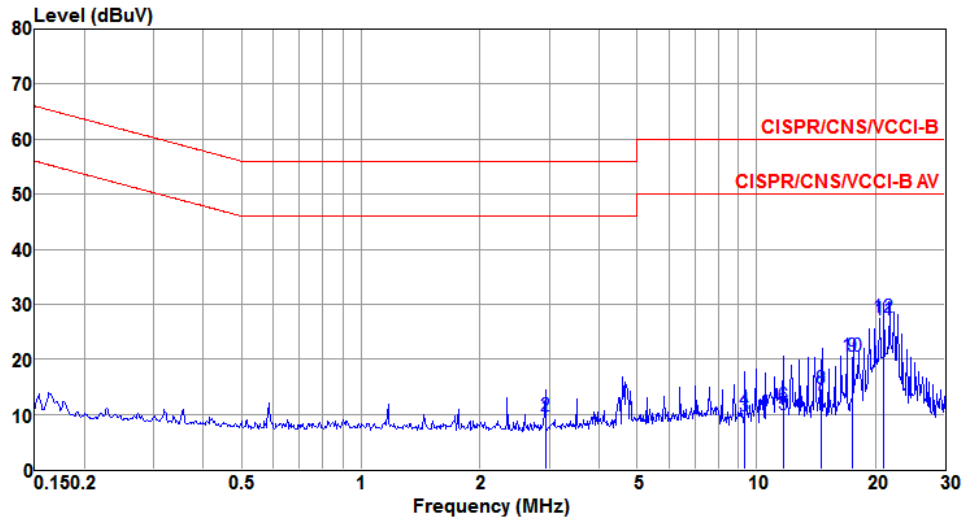

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line dBuV	Limit dB	Level dBuV	factor dB	loss dB	
1	2.925	9.42	46.00	-36.58	8.97	0.17	0.28	Average
2	2.925	9.80	56.00	-46.20	9.35	0.17	0.28	QP
3	9.352	9.74	50.00	-40.26	9.18	0.26	0.30	Average
4	9.352	10.63	60.00	-49.37	10.07	0.26	0.30	QP
5	11.698	9.97	50.00	-40.03	9.41	0.30	0.26	Average
6	11.698	11.66	60.00	-48.34	11.10	0.30	0.26	QP
7	14.616	13.52	50.00	-36.48	12.97	0.34	0.21	Average
8	14.616	14.71	60.00	-45.29	14.16	0.34	0.21	QP
9	17.542	20.49	50.00	-29.51	20.01	0.38	0.10	Average
10	17.542	20.59	60.00	-39.41	20.11	0.38	0.10	QP
11@	21.046	27.25	50.00	-22.75	26.80	0.41	0.04	Average
12	21.046	27.59	60.00	-32.41	27.14	0.41	0.04	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation / SF	CSS / 12	Test Freq. (MHz)	924
Power Phase	Line	Test Configuration	2

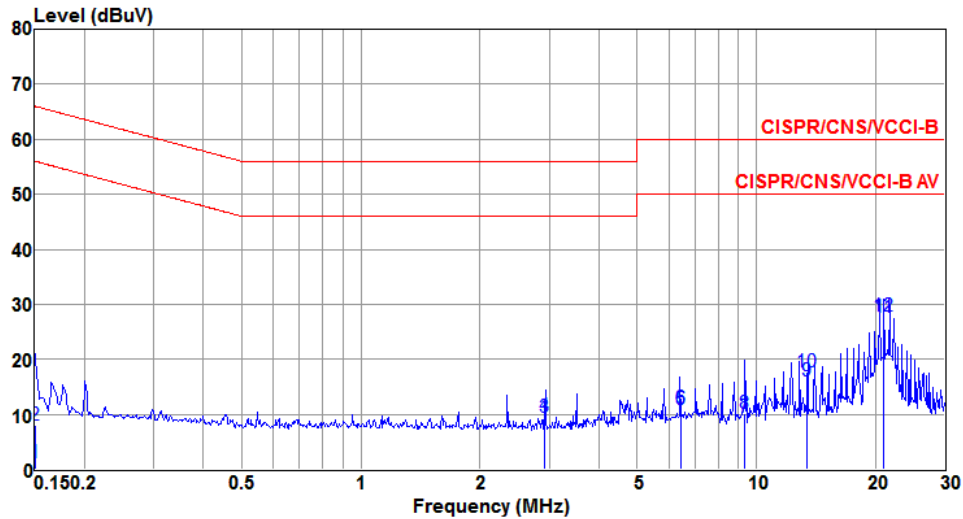

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.150	1.13	56.00	-54.87	0.94	0.11	0.08	Average
2	0.150	8.09	66.00	-57.91	7.90	0.11	0.08	QP
3	2.922	9.48	46.00	-36.52	9.02	0.18	0.28	Average
4	2.922	9.63	56.00	-46.37	9.17	0.18	0.28	QP
5	6.431	10.97	50.00	-39.03	10.45	0.22	0.30	Average
6	6.431	11.20	60.00	-48.80	10.68	0.22	0.30	QP
7	9.352	9.50	50.00	-40.50	8.96	0.24	0.30	Average
8	9.352	10.11	60.00	-49.89	9.57	0.24	0.30	QP
9	13.449	15.96	50.00	-34.04	15.43	0.30	0.23	Average
10	13.449	17.78	60.00	-42.22	17.25	0.30	0.23	QP
11@	21.050	27.70	50.00	-22.30	27.28	0.38	0.04	Average
12	21.050	27.96	60.00	-32.04	27.54	0.38	0.04	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Modulation / SF	CSS / 12	Test Freq. (MHz)	924
Power Phase	Neutral	Test Configuration	2

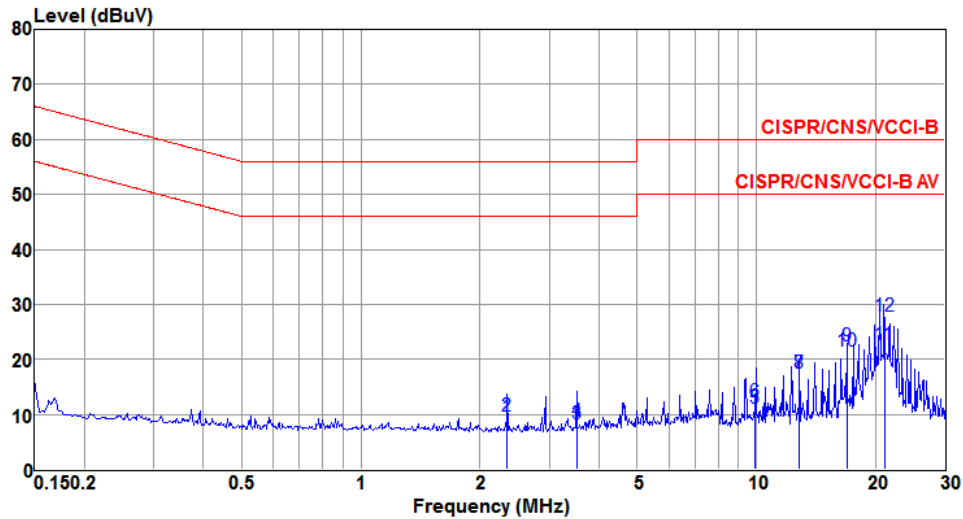

	Freq	Level	Limit	Over	Read	LISN	cable	
	MHz	dBuV	Line	Limit	Level	factor	loss	Remark
			dBuV	dB	dBuV	dB	dB	
1	2.339	9.54	46.00	-36.46	9.11	0.17	0.26	Average
2	2.339	9.70	56.00	-46.30	9.27	0.17	0.26	QP
3	3.509	8.21	46.00	-37.79	7.74	0.17	0.30	Average
4	3.509	8.84	56.00	-47.16	8.37	0.17	0.30	QP
5	9.942	11.05	50.00	-38.95	10.48	0.27	0.30	Average
6	9.942	12.21	60.00	-47.79	11.64	0.27	0.30	QP
7	12.865	17.46	50.00	-32.54	16.90	0.32	0.24	Average
8	12.865	17.44	60.00	-42.56	16.88	0.32	0.24	QP
9	16.955	22.38	50.00	-27.62	21.89	0.37	0.12	Average
10	16.955	21.59	60.00	-38.41	21.10	0.37	0.12	QP
11@	21.052	22.66	50.00	-27.34	22.21	0.41	0.04	Average
12	21.052	27.79	60.00	-32.21	27.34	0.41	0.04	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth


1. Set resolution bandwidth (RBW) = 10kHz, Video bandwidth = 30kHz.
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup




3.2.4 Test Result of 6dB and Occupied Bandwidth

Modulation / SF	N _{TX}	Freq. (MHz)	6dB Bandwidth (MHz)				Limit (kHz)
			Chain 0	Chain 1	Chain 2	Chain 3	
CSS / 12	1	903	0.777	---	---	---	500
CSS / 12	1	909.4	0.768	---	---	---	500
CSS / 12	1	924	0.768	---	---	---	500

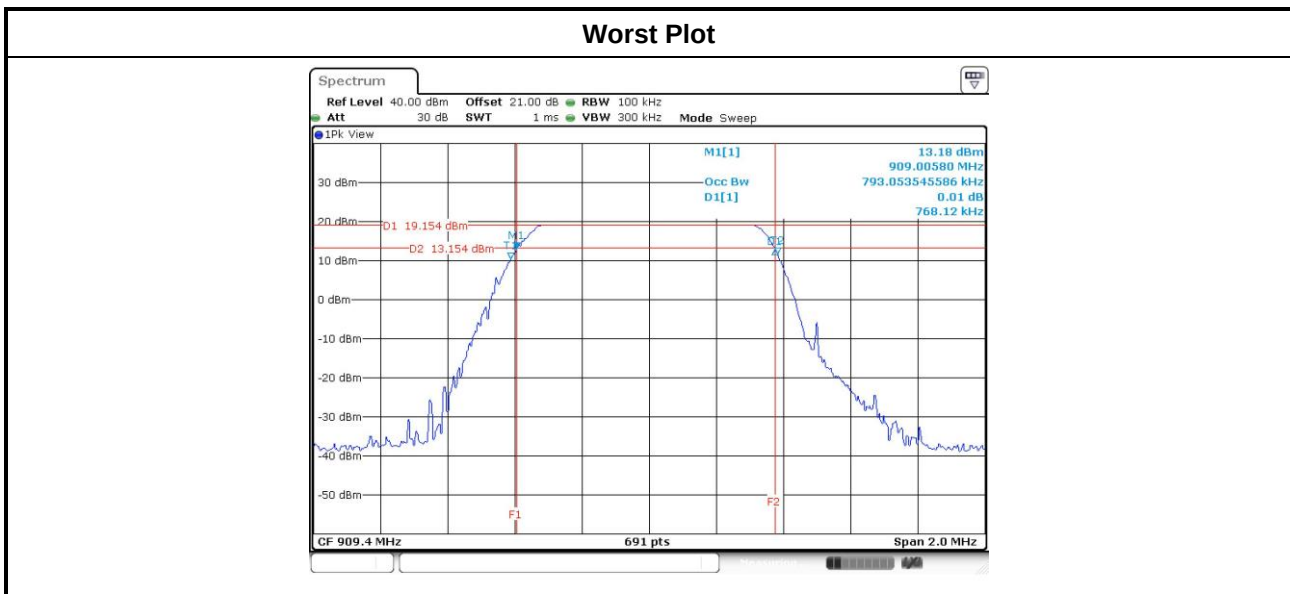

Modulation / SF	N _{TX}	Freq. (MHz)	99% Occupied Bandwidth (MHz)			
			Chain 0	Chain 1	Chain 2	Chain 3
CSS / 12	1	903	0.514	---	---	---
CSS / 12	1	909.4	0.517	---	---	---
CSS / 12	1	924	0.510	---	---	---

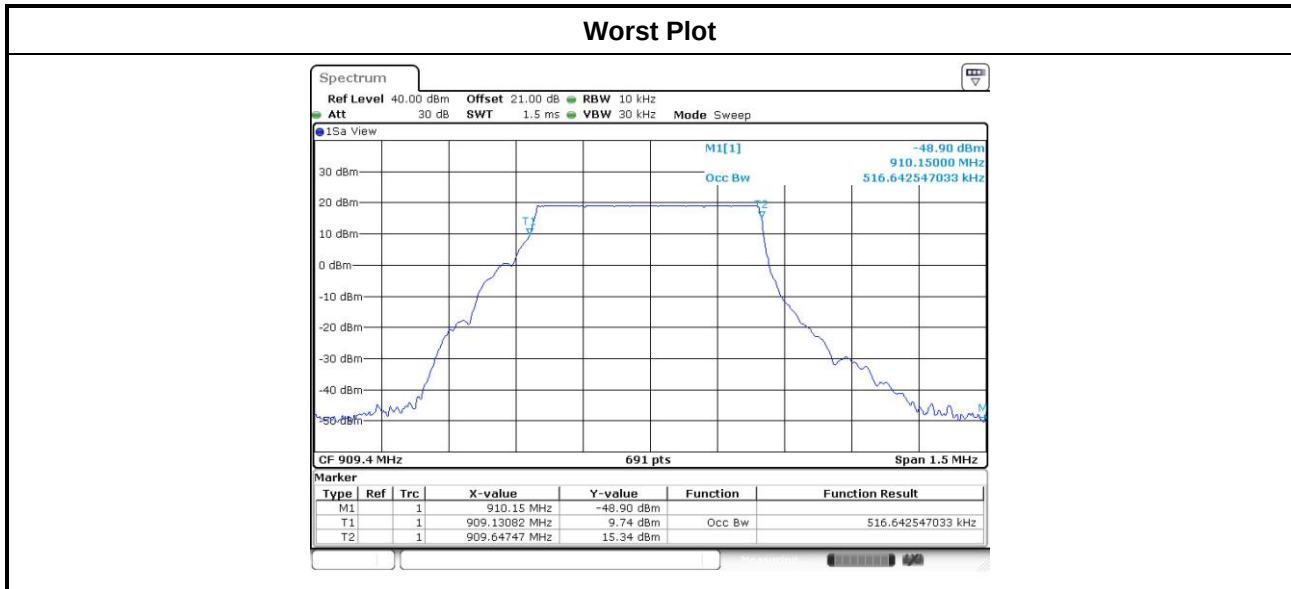

3.3 RF Output Power

3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.


- ☒ Antenna gain $\leq 6\text{dBi}$, no any corresponding reduction is in output power limit.
- ☐ Antenna gain $> 6\text{dBi}$

Transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

3.3.2 Test Procedures

- ☐ Maximum Peak Conducted Output Power
 - ☐ **Spectrum analyzer**
 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.
 - ☐ **Power meter**
 1. A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- ☒ Maximum Conducted Output Power
 - ☒ **Power meter**
 1. A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



3.3.4 Test Result of Maximum Output Power

Modulation / SF	N _{TX}	Freq. (MHz)	Output Power (mW)	Output Power (dBm)	Limit (dBm)
CSS / 12	1	903	91.622	19.62	30
CSS / 12	1	909.4	91.201	19.60	30
CSS / 12	1	924	90.573	19.57	30

3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures


- ☒ Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
 1. Set the RBW = 3kHz, VBW = 10kHz.
 2. Detector = Peak, Sweep time = auto couple.
 3. Trace mode = max hold, allow trace to fully stabilize.
 4. Use the peak marker function to determine the maximum amplitude level.
- ☐ Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
 1. Set the RBW = 100kHz, VBW = 300 kHz.
 2. Detector = RMS, Sweep time = auto couple.
 3. Set the sweep time to: $\geq 10 \times (\text{number of measurement points in sweep}) \times (\text{maximum data rate per stream})$.
 4. Perform the measurement over a single sweep.
 5. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test Setup



3.4.4 Test Result of Power Spectral Density

Modulation / SF	N _{TX}	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
CSS / 12	1	903	-1.74	8.00
CSS / 12	1	909.4	-1.04	8.00
CSS / 12	1	924	-1.31	8.00

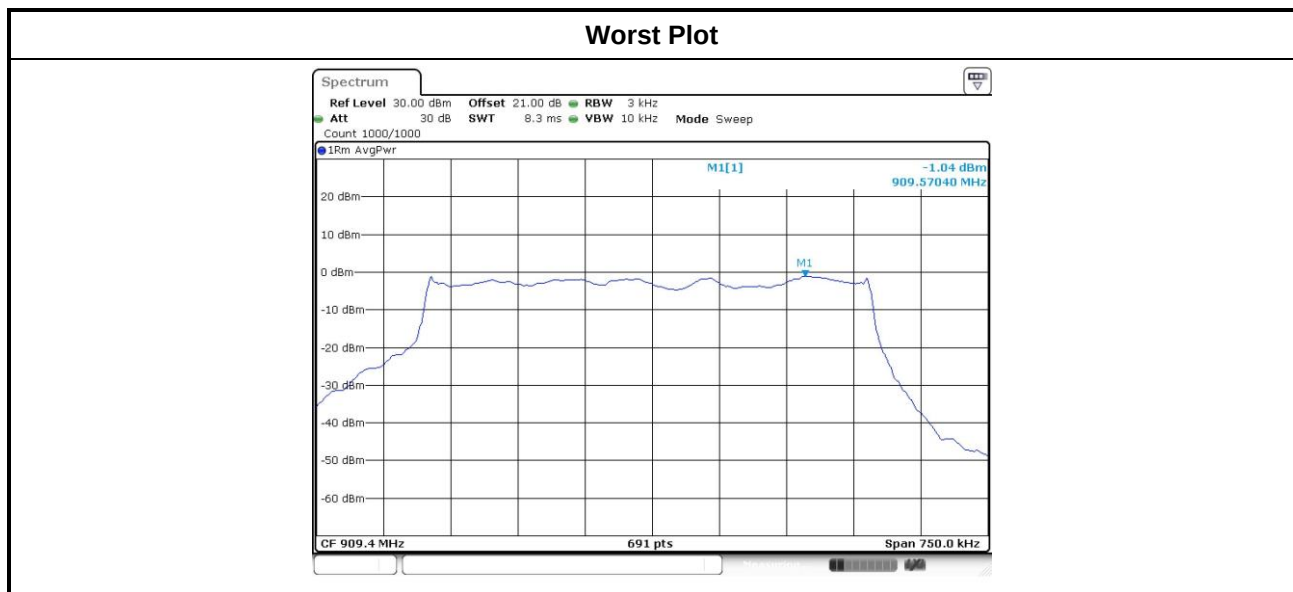

3.5 Unwanted Emissions into Restricted Frequency Bands

3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.5.3 Test Setup

Radiated Emissions below 1 GHz

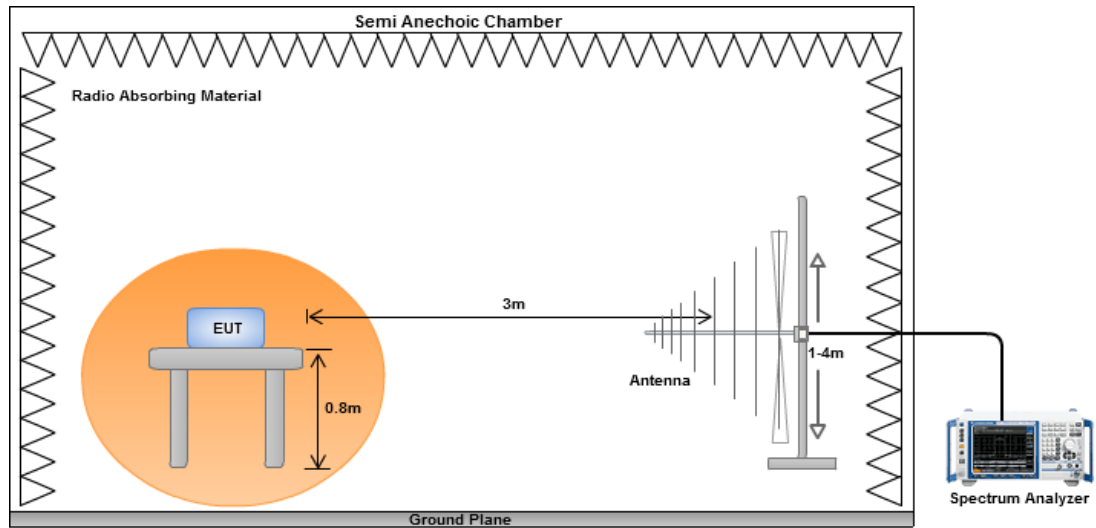


Radiated Emissions above 1 GHz

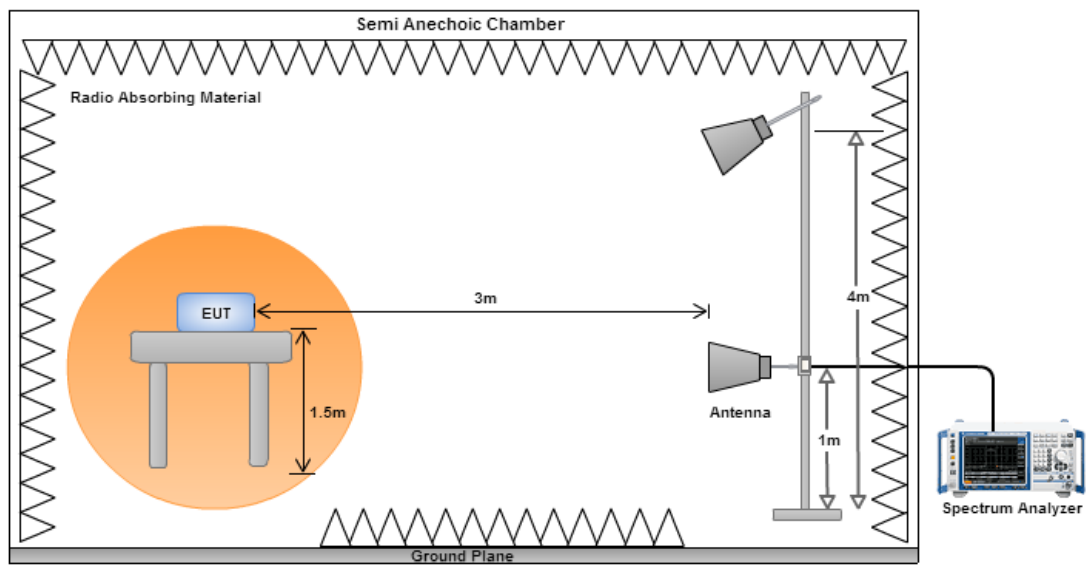

3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation / SF	CSS / 12	Test Freq. (MHz)	903
Polarization	Horizontal	Test Configuration	1

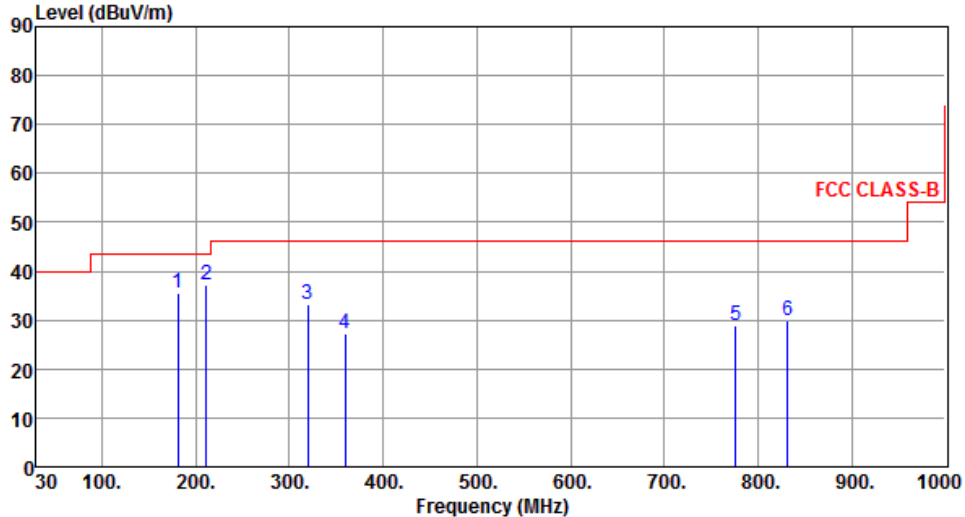


The graph displays the radiated unwanted emissions level in dBuV/m across a frequency range from 30 MHz to 1000 MHz. A red line represents the FCC CLASS-B limit, which is 40 dBuV/m from 30 MHz to 100 MHz, 45 dBuV/m from 100 MHz to 1000 MHz, and 55 dBuV/m at 1000 MHz. Six emission peaks are identified and labeled with blue numbers 1 through 6. The data for these peaks is provided in the table below.

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	181.32	35.69	43.50	-7.81	53.93	-18.24	Peak	---	---
2	211.39	37.09	43.50	-6.41	56.45	-19.36	Peak	---	---
3	320.03	33.24	46.00	-12.76	48.70	-15.46	Peak	---	---
4	359.80	27.36	46.00	-18.64	41.97	-14.61	Peak	---	---
5	775.93	28.82	46.00	-17.18	35.67	-6.85	Peak	---	---
6	831.22	29.99	46.00	-16.01	36.25	-6.26	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
 Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	903
Polarization	Vertical	Test Configuration	1

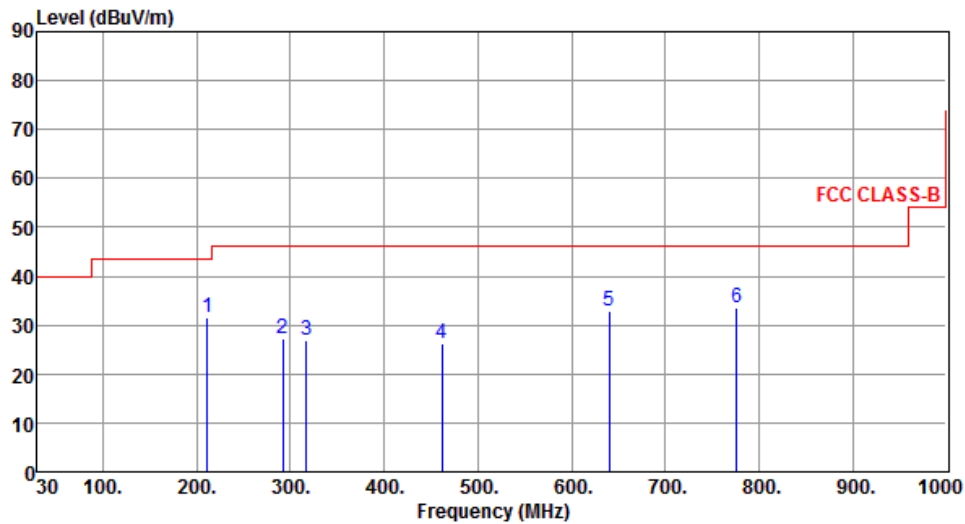

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	211.39	31.42	43.50	-12.08	50.78	-19.36	Peak	---	---
2	291.90	27.12	46.00	-18.88	43.24	-16.12	Peak	---	---
3	317.12	26.74	46.00	-19.26	42.25	-15.51	Peak	---	---
4	461.65	26.13	46.00	-19.87	38.14	-12.01	Peak	---	---
5	640.13	32.79	46.00	-13.21	41.71	-8.92	Peak	---	---
6	775.93	33.55	46.00	-12.45	40.40	-6.85	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	909.4
Polarization	Horizontal	Test Configuration	1

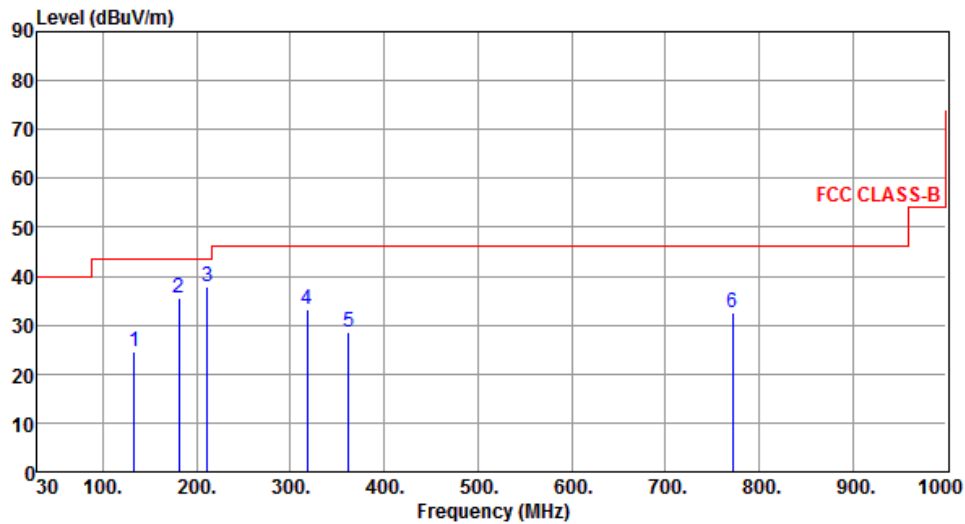

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	133.79	24.69	43.50	-18.81	42.31	-17.62	Peak	---	---
2	181.32	35.46	43.50	-8.04	53.70	-18.24	Peak	---	---
3	211.39	37.85	43.50	-5.65	57.21	-19.36	Peak	---	---
4	318.09	33.31	46.00	-12.69	48.80	-15.49	Peak	---	---
5	361.74	28.46	46.00	-17.54	43.01	-14.55	Peak	---	---
6	772.05	32.53	46.00	-13.47	39.42	-6.89	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	909.4
Polarization	Vertical	Test Configuration	1

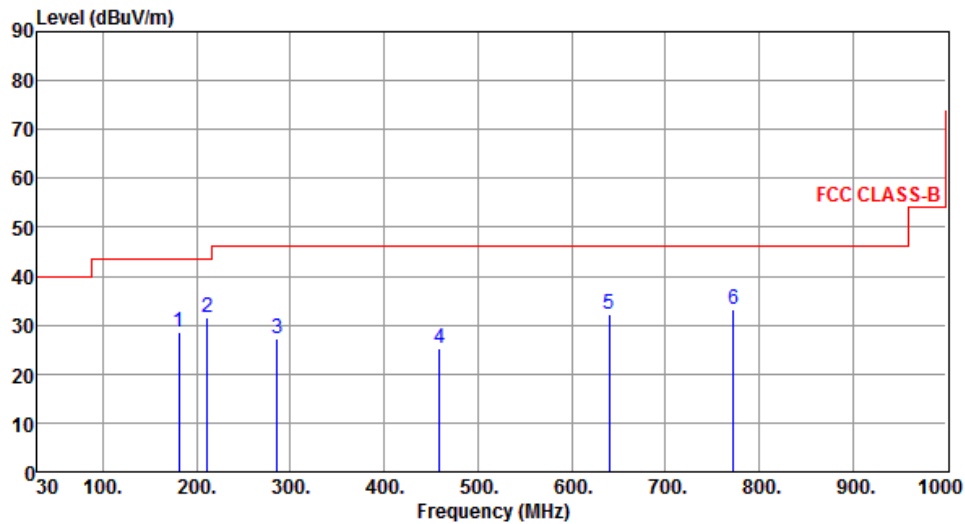

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	181.32	28.49	43.50	-15.01	46.73	-18.24	Peak	---	---
2	211.39	31.62	43.50	-11.88	50.98	-19.36	Peak	---	---
3	286.08	27.34	46.00	-18.66	43.65	-16.31	Peak	---	---
4	458.74	25.24	46.00	-20.76	37.31	-12.07	Peak	---	---
5	640.13	32.09	46.00	-13.91	41.01	-8.92	Peak	---	---
6	773.02	33.07	46.00	-12.93	39.95	-6.88	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	924
Polarization	Horizontal	Test Configuration	1

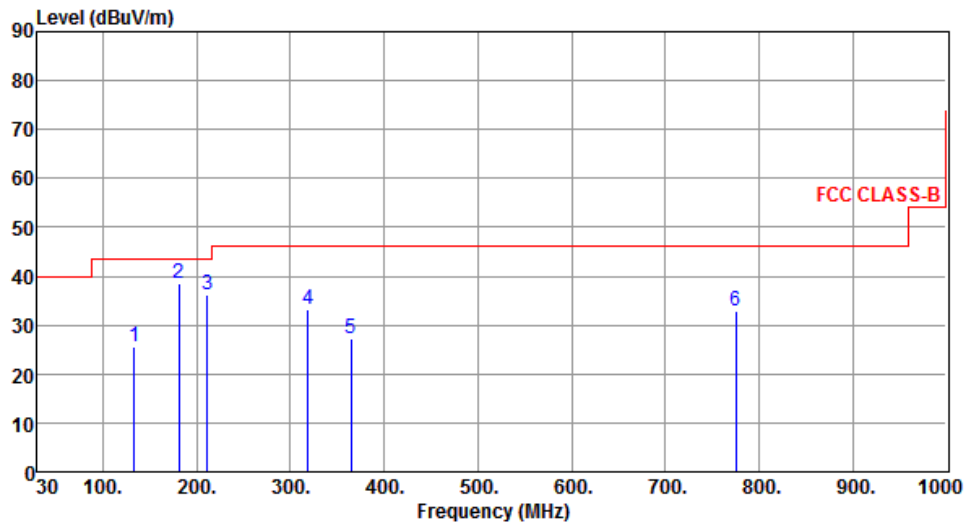

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	133.79	25.42	43.50	-18.08	43.04	-17.62	Peak	---	---
2	181.32	38.47	43.50	-5.03	56.71	-18.24	Peak	---	---
3	211.39	36.13	43.50	-7.37	55.49	-19.36	Peak	---	---
4	319.06	33.16	46.00	-12.84	48.64	-15.48	Peak	---	---
5	364.65	27.28	46.00	-18.72	41.75	-14.47	Peak	---	---
6	774.96	32.98	46.00	-13.02	39.85	-6.87	Peak	---	---


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	924
Polarization	Vertical	Test Configuration	1

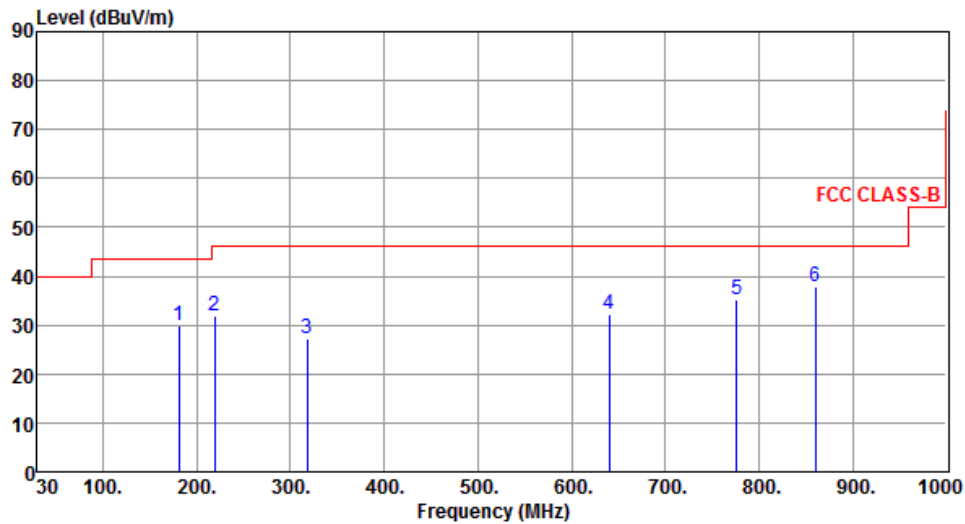

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	181.32	29.99	43.50	-13.51	48.23	-18.24	Peak	---	---
2	219.15	31.83	46.00	-14.17	50.94	-19.11	Peak	---	---
3	318.09	27.26	46.00	-18.74	42.75	-15.49	Peak	---	---
4	640.13	32.16	46.00	-13.84	41.08	-8.92	Peak	---	---
5	775.93	35.25	46.00	-10.75	42.10	-6.85	Peak	---	---
6	860.32	37.90	46.00	-8.10	43.78	-5.88	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	903
Polarization	Horizontal	Test Configuration	2

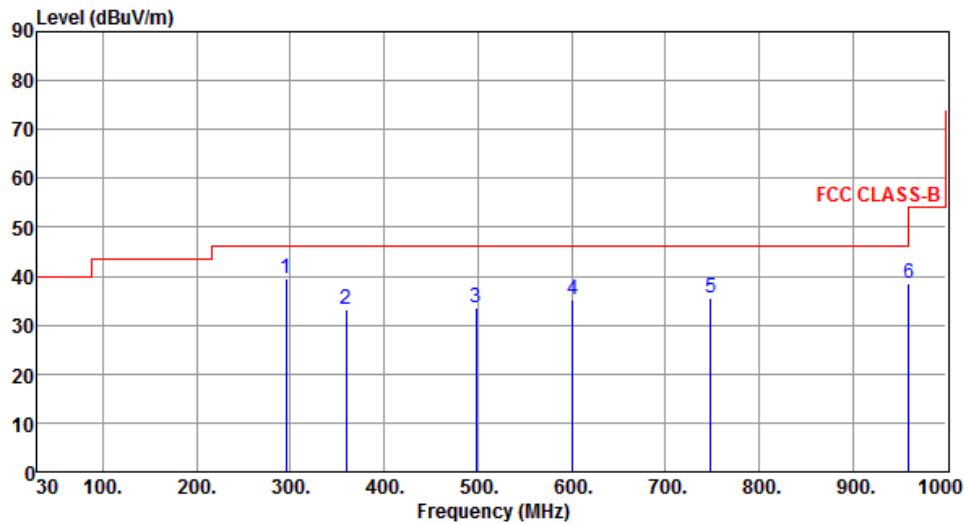

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	295.78	39.63	46.00	-6.37	55.62	-15.99	Peak	---	---
2	359.80	33.15	46.00	-12.85	47.76	-14.61	Peak	---	---
3	498.51	33.69	46.00	-12.31	44.94	-11.25	Peak	---	---
4	601.33	35.24	46.00	-10.76	44.84	-9.60	Peak	---	---
5	748.77	35.42	46.00	-10.58	42.52	-7.10	Peak	---	---
6	960.23	38.49	54.00	-15.51	43.03	-4.54	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	903
Polarization	Vertical	Test Configuration	2

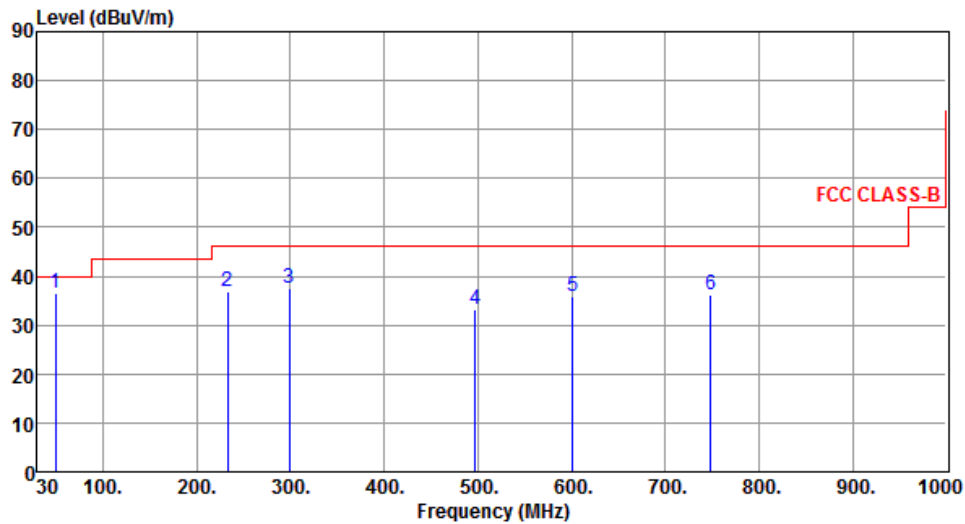

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	49.40	36.53	40.00	-3.47	52.85	-16.32	Peak	---	---
2	232.73	36.85	46.00	-9.15	55.33	-18.48	Peak	---	---
3	298.69	37.38	46.00	-8.62	53.27	-15.89	Peak	---	---
4	497.54	33.18	46.00	-12.82	44.44	-11.26	Peak	---	---
5	601.33	35.95	46.00	-10.05	45.55	-9.60	Peak	---	---
6	748.77	36.18	46.00	-9.82	43.28	-7.10	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	909.4
Polarization	Horizontal	Test Configuration	2

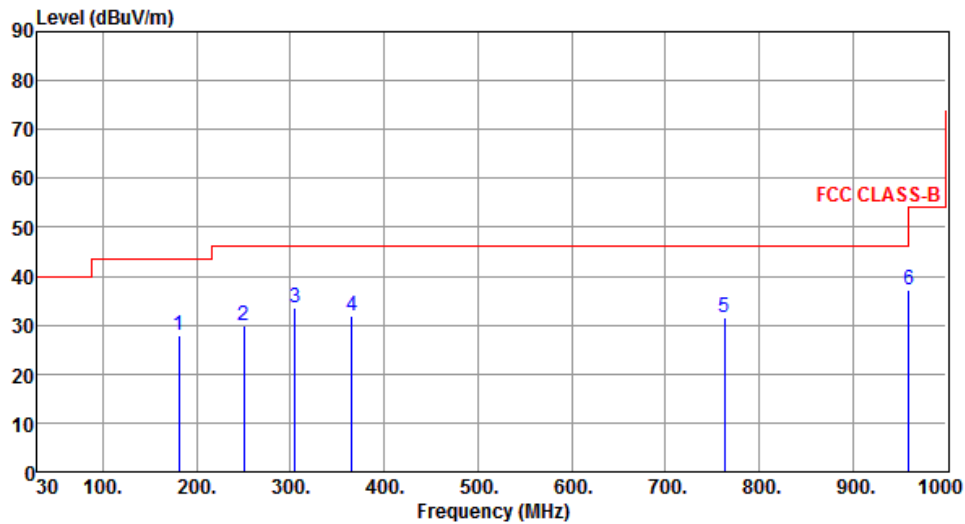

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	181.32	27.90	43.50	-15.60	46.14	-18.24	Peak	---	---
2	250.19	29.77	46.00	-16.23	47.55	-17.78	Peak	---	---
3	304.51	33.55	46.00	-12.45	49.31	-15.76	Peak	---	---
4	365.62	32.00	46.00	-14.00	46.44	-14.44	Peak	---	---
5	763.32	31.50	46.00	-14.50	38.47	-6.97	Peak	---	---
6	960.23	37.36	54.00	-16.64	41.90	-4.54	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	909.4
Polarization	Vertical	Test Configuration	2

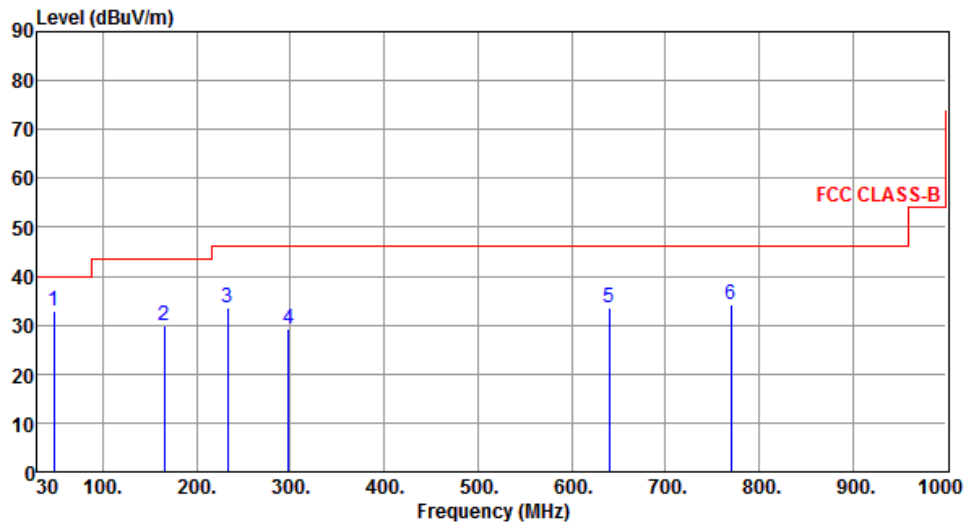

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	47.46	32.91	40.00	-7.09	49.21	-16.30	Peak	---	---
2	165.80	29.81	43.50	-13.69	46.79	-16.98	Peak	---	---
3	232.73	33.53	46.00	-12.47	52.01	-18.48	Peak	---	---
4	297.72	29.39	46.00	-16.61	45.31	-15.92	Peak	---	---
5	640.13	33.62	46.00	-12.38	42.54	-8.92	Peak	---	---
6	770.11	34.32	46.00	-11.68	41.22	-6.90	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	924
Polarization	Horizontal	Test Configuration	2

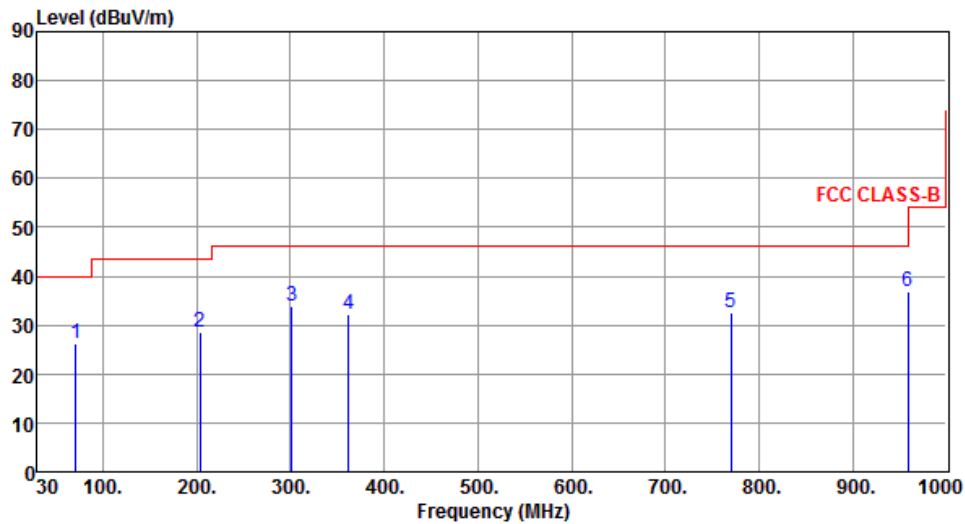

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	70.74	26.13	40.00	-13.87	45.61	-19.48	Peak	---	---
2	203.63	28.42	43.50	-15.08	47.78	-19.36	Peak	---	---
3	301.60	33.81	46.00	-12.19	49.63	-15.82	Peak	---	---
4	361.74	32.25	46.00	-13.75	46.80	-14.55	Peak	---	---
5	770.11	32.66	46.00	-13.34	39.56	-6.90	Peak	---	---
6	959.26	36.92	46.00	-9.08	41.46	-4.54	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	924
Polarization	Vertical	Test Configuration	2

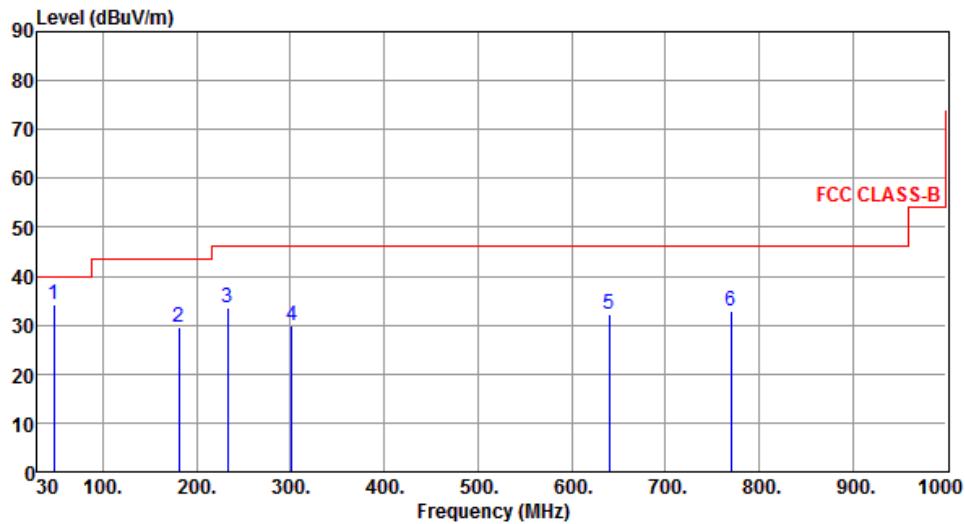

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	47.46	34.15	40.00	-5.85	50.45	-16.30	Peak	---	---
2	181.32	29.50	43.50	-14.00	47.74	-18.24	Peak	---	---
3	232.73	33.38	46.00	-12.62	51.86	-18.48	Peak	---	---
4	301.60	29.92	46.00	-16.08	45.74	-15.82	Peak	---	---
5	640.13	32.11	46.00	-13.89	41.03	-8.92	Peak	---	---
6	770.11	32.75	46.00	-13.25	39.65	-6.90	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation / SF	CSS / 12	Test Freq. (MHz)	903
Polarization	Horizontal	Test Configuration	1

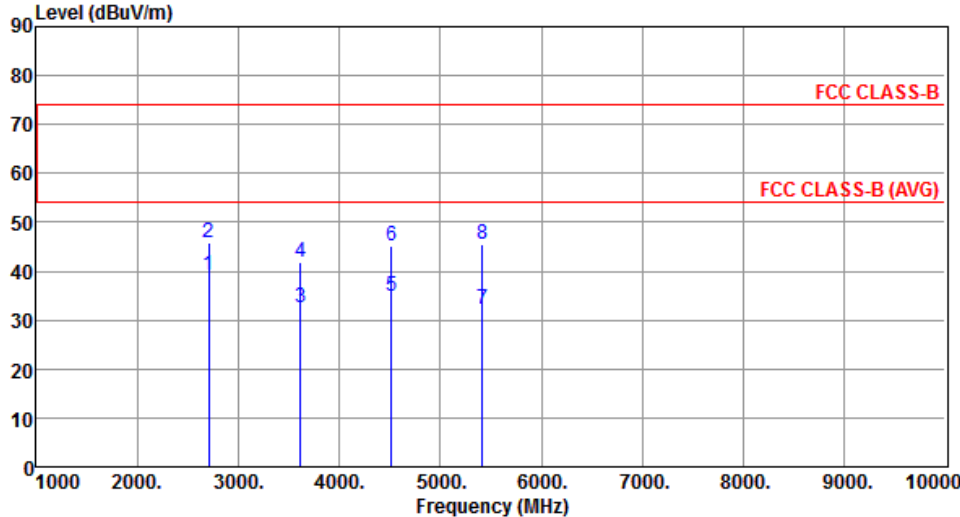

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2709.00	39.35	54.00	-14.65	41.23	-1.88	Average	155	122
2	2709.00	45.77	74.00	-28.23	47.65	-1.88	Peak	155	122
3	3612.00	32.53	54.00	-21.47	32.52	0.01	Average	138	56
4	3612.00	41.85	74.00	-32.15	41.84	0.01	Peak	138	56
5	4515.00	34.98	54.00	-19.02	31.33	3.65	Average	185	325
6	4515.00	45.18	74.00	-28.82	41.53	3.65	Peak	185	325
7	5418.00	32.37	54.00	-21.63	26.66	5.71	Average	153	216
8	5418.00	45.36	74.00	-28.64	39.65	5.71	Peak	153	216

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation / SF	CSS / 12	Test Freq. (MHz)	903
Polarization	Vertical	Test Configuration	1

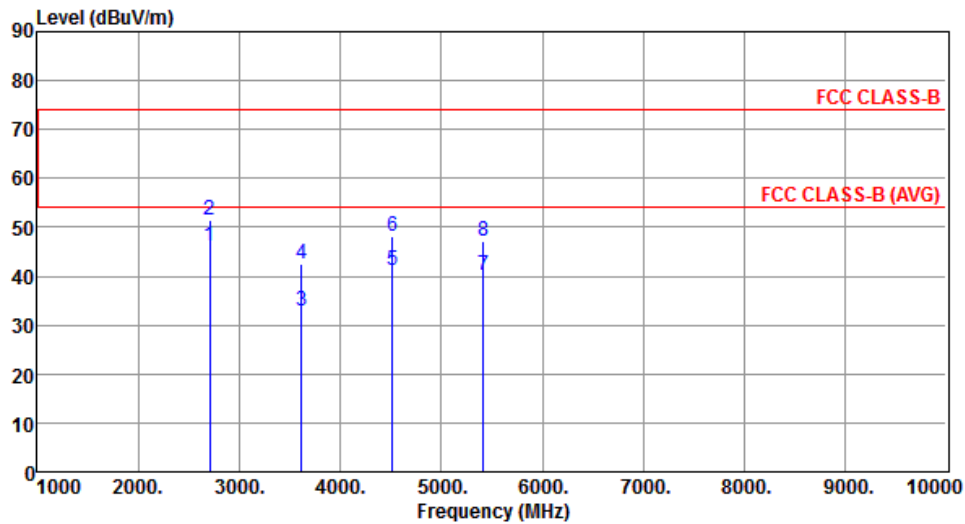


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2709.00	46.24	54.00	-7.76	48.12	-1.88	Average	155	351
2	2709.00	51.43	74.00	-22.57	53.31	-1.88	Peak	155	351
3	3612.00	32.85	54.00	-21.15	32.84	0.01	Average	182	325
4	3612.00	42.47	74.00	-31.53	42.46	0.01	Peak	182	325
5	4515.00	41.21	54.00	-12.79	37.56	3.65	Average	172	10
6	4515.00	48.27	74.00	-25.73	44.62	3.65	Peak	172	10
7	5418.00	40.23	54.00	-13.77	34.52	5.71	Average	172	358
8	5418.00	47.26	74.00	-26.74	41.55	5.71	Peak	172	358

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation / SF	CSS / 12	Test Freq. (MHz)	909.4
Polarization	Horizontal	Test Configuration	1

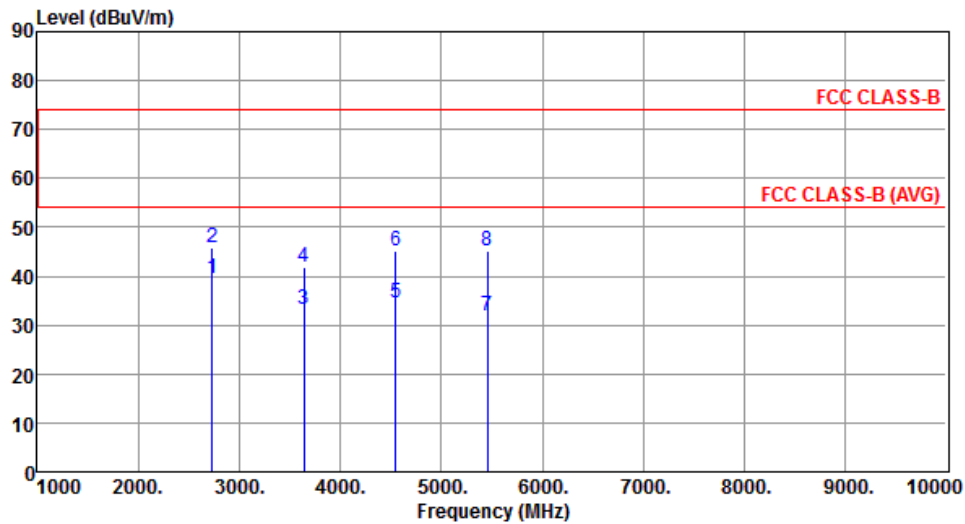


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2728.20	39.53	54.00	-14.47	41.34	-1.81	Average	156	135
2	2728.20	45.94	74.00	-28.06	47.75	-1.81	Peak	156	135
3	3637.60	33.07	54.00	-20.93	32.91	0.16	Average	156	55
4	3637.60	41.77	74.00	-32.23	41.61	0.16	Peak	156	55
5	4547.00	34.61	54.00	-19.39	30.78	3.83	Average	194	338
6	4547.00	45.27	74.00	-28.73	41.44	3.83	Peak	194	338
7	5456.40	31.97	54.00	-22.03	26.25	5.72	Average	166	231
8	5456.40	45.16	74.00	-28.84	39.44	5.72	Peak	166	231

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation / SF	CSS / 12	Test Freq. (MHz)	909.4
Polarization	Vertical	Test Configuration	1

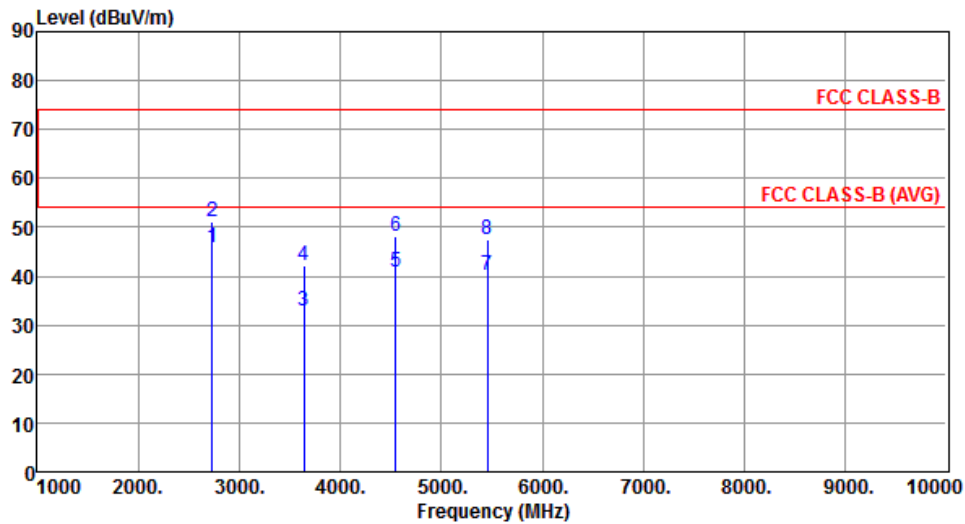


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2728.20	45.93	54.00	-8.07	47.74	-1.81	Average	163	357
2	2728.20	51.10	74.00	-22.90	52.91	-1.81	Peak	163	357
3	3637.60	32.72	54.00	-21.28	32.56	0.16	Average	188	336
4	3637.60	42.25	74.00	-31.75	42.09	0.16	Peak	188	336
5	4547.00	40.98	54.00	-13.02	37.15	3.83	Average	175	5
6	4547.00	48.11	74.00	-25.89	44.28	3.83	Peak	175	5
7	5456.40	40.27	54.00	-13.73	34.55	5.72	Average	166	1
8	5456.40	47.65	74.00	-26.35	41.93	5.72	Peak	166	1

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation / SF	CSS / 12	Test Freq. (MHz)	924
Polarization	Horizontal	Test Configuration	1

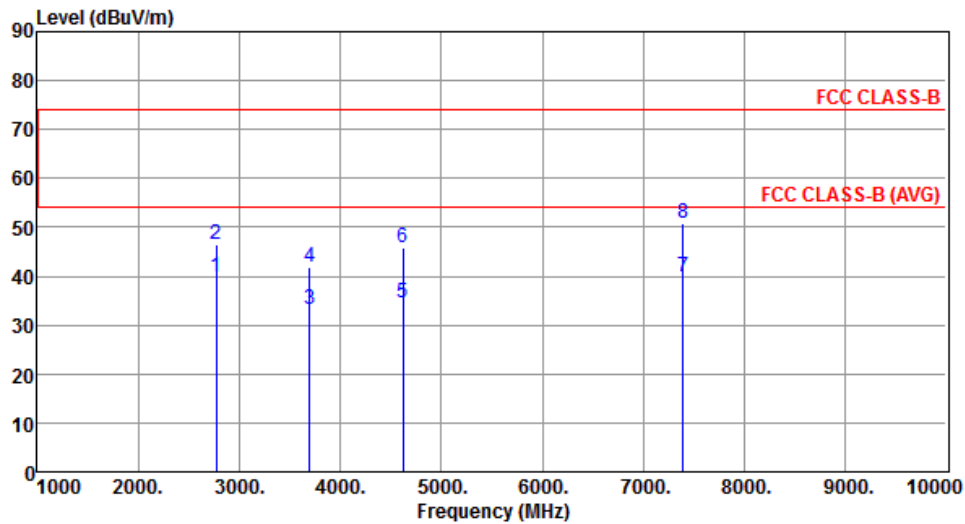


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2772.00	39.88	54.00	-14.12	41.52	-1.64	Average	155	158
2	2772.00	46.38	74.00	-27.62	48.02	-1.64	Peak	155	158
3	3696.00	33.17	54.00	-20.83	32.63	0.54	Average	145	62
4	3696.00	41.99	74.00	-32.01	41.45	0.54	Peak	145	62
5	4620.00	34.70	54.00	-19.30	30.53	4.17	Average	185	352
6	4620.00	45.71	74.00	-28.29	41.54	4.17	Peak	185	352
7	7392.00	39.74	54.00	-14.26	30.12	9.62	Average	152	215
8	7392.00	50.95	74.00	-23.05	41.33	9.62	Peak	152	215

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation / SF	CSS / 12	Test Freq. (MHz)	924
Polarization	Vertical	Test Configuration	1

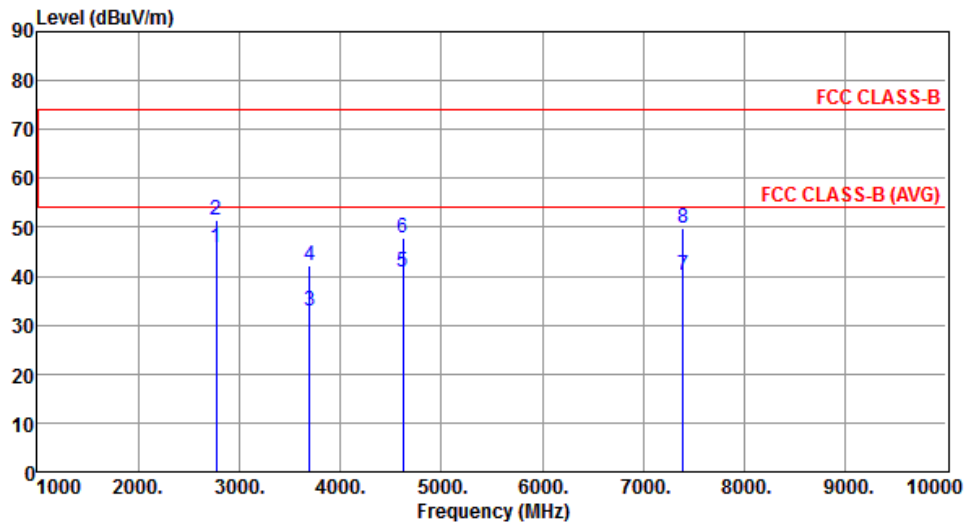

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2772.00	45.98	54.00	-8.02	47.62	-1.64	Average	160	355
2	2772.00	51.32	74.00	-22.68	52.96	-1.64	Peak	160	355
3	3696.00	32.96	54.00	-21.04	32.42	0.54	Average	181	321
4	3696.00	42.09	74.00	-31.91	41.55	0.54	Peak	181	321
5	4620.00	40.69	54.00	-13.31	36.52	4.17	Average	170	15
6	4620.00	47.71	74.00	-26.29	43.54	4.17	Peak	170	15
7	7392.00	40.15	54.00	-13.85	30.53	9.62	Average	162	12
8	7392.00	49.95	74.00	-24.05	40.33	9.62	Peak	152	12

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6 Emissions in Non-Restricted Frequency Bands

3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level


Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 10GHz
4. Use the peak marker function to determine the maximum amplitude level


3.6.4 Test Setup

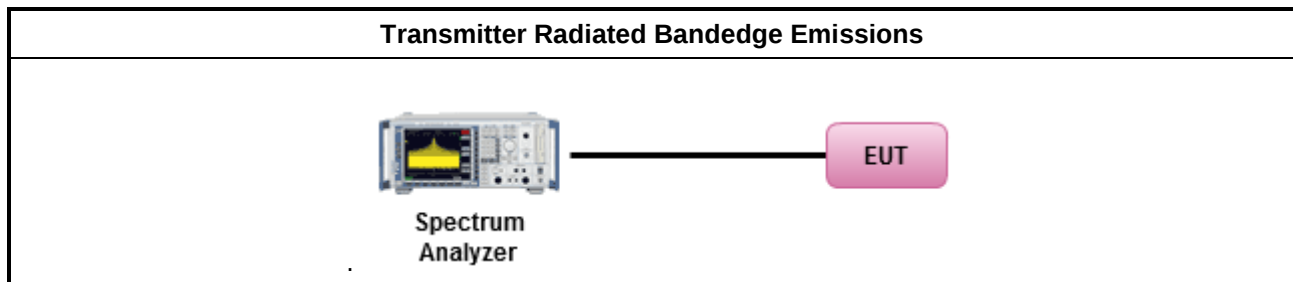


3.6.5 Unwanted Emissions into Non-Restricted Frequency Bands

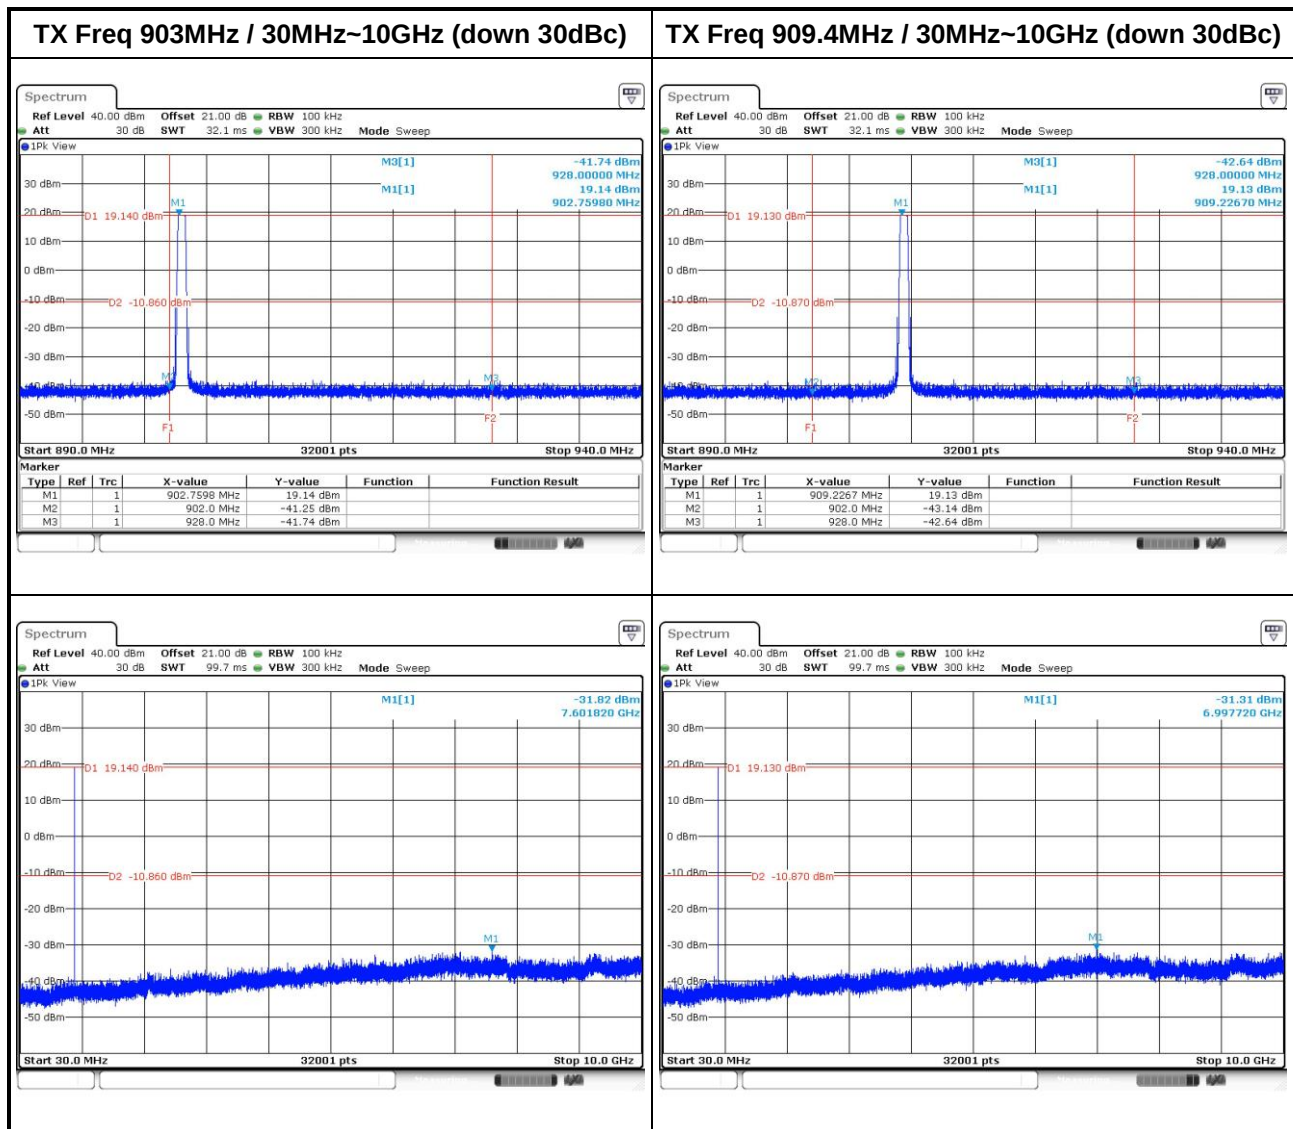

TX Freq 924MHz / 30MHz~10GHz (down 30dBc)

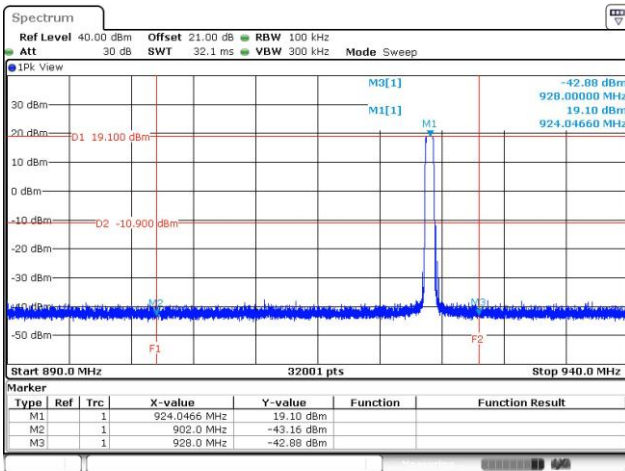

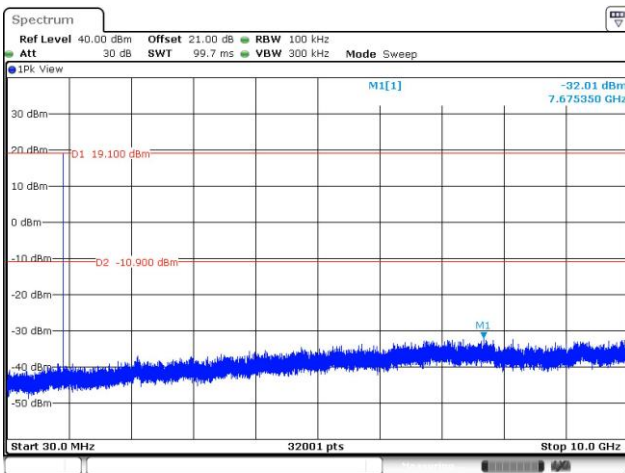

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan,
R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd
St., Kwei Shan Hsiang, Tao Yuan
Hsien 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan Hsiang, Tao Yuan
Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==