

# TEST REPORT

of

FCC Part 15 Subpart C §15.247

FCC ID: 2AF4XAPPBOT-LINK

Equipment Under Test : HOME CAMERA  
Model Name : APPBOT-LINK  
Applicant : VARRAM SYSTEM Co., Ltd.  
Manufacturer : VARRAM SYSTEM Co., Ltd.  
Date of Test(s) : 2015. 10. 13 ~ 2015. 12. 15  
Date of Issue : 2015. 12. 15

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Date:

2015. 12. 15

---

Patrick Kang

Approved By:



Date:

2015. 12. 15

---

Logan Lee

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

# INDEX

## Table of contents

|   |    |
|---|----|
| 1. General information -----  | 3  |
| 2. Transmitter radiated spurious emissions and conducted spurious emission----- | 6  |
| 3. Maximum Conducted output power -----   | 45 |
| 4. Transmitter AC Power Line Conducted Emission-----                            | 49 |

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

## 1. General Information

### 1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- Wireless Div. 2FL, 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : + 82 31 688 0901

Fax No. : + 82 31 688 0921

### 1.2. Details of Applicant

Applicant : VARRAM SYSTEM Co., Ltd.

Address : RM205, Venture town, 105, shinildong-ro, Daedeok-gu, Daejeon-si, Republic of Korea

Contact Person : Jung, Ju-Yong

Phone No. : + 82 70 8797 8922

### 1.3. Description of EUT

|                      |   |
|----------------------|---|
| Kind of Product      | HOME CAMERA   |
| Model Name           | APPBOT-LINK   |
| Approved Module Name | FN-8126EU (FCC ID: 2AATLFN-8126EU)  |
| Power Supply         | DC 3.7 V (Used by rechargeable battery)                                   |
| Frequency Range      | 2 412 MHz ~ 2 462 MHz (11b/g/n_HT20),<br>2 422 MHz ~ 2 452 MHz (11n_HT40) |
| Modulation Technique | DSSS, OFDM  |
| Number of Channels   | 11 channels (11b/g/n_HT20), 7 channels (11n_HT40),                        |
| Antenna Type         | Internal Type   |
| Antenna Gain         | 0 dBi   |

### 1.4. Declaration by the manufacturer

-N/A

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

## 1.5. Test Equipment List

| Equipment          | Manufacturer                  | Model                                | S/N            | Cal Date      | Cal Interval | Cal Due.      |
|--------------------|-------------------------------|--------------------------------------|----------------|---------------|--------------|---------------|
| Signal Generator   | Agilent                       | E8257D                               | MY51501169     | Jul. 13, 2015 | Annual       | Jul. 13, 2016 |
| Signal Generator   | R&S                           | SMBV100A                             | 255834         | Jun. 22, 2015 | Annual       | Jun. 22, 2016 |
| Spectrum Analyzer  | Agilent                       | N9030A                               | MY53120526     | Jun. 23, 2015 | Annual       | Jun. 23, 2016 |
| High Pass Filter   | Wainwright                    | WHK3.0/18G-10SS                      | 344            | Jun. 08, 2015 | Annual       | Jun. 08, 2016 |
| High Pass Filter   | Wainwright                    | WHNX7.5/26.5G-6SS                    | 15             | Jun. 23, 2015 | Annual       | Jun. 23, 2016 |
| Low Pass Filter    | Mini circuits                 | NLP-1200+                            | V 8979400903-2 | Mar. 12, 2015 | Annual       | Mar. 12, 2016 |
| Spectrum Analyzer  | R&S                           | FSV30                                | 100768         | Mar. 24, 2015 | Annual       | Mar. 24, 2016 |
| Attenuator         | MCLI                          | FAS-12-10                            | 1              | Jun. 09, 2015 | Annual       | Jun. 09, 2016 |
| Power Sensor       | R&S                           | NRP-Z81                              | 100669         | Mar. 12, 2015 | Annual       | Mar. 12, 2016 |
| DC Power Supply    | Agilent                       | U8002A                               | MY50060028     | Mar. 23, 2015 | Annual       | Mar. 23, 2016 |
| Antenna Master     | INN-CO                        | MM4000                               | N/A            | N.C.R.        | N/A          | N.C.R.        |
| Turn Table         | INN-CO                        | DS 1200S                             | N/A            | N.C.R.        | N/A          | N.C.R.        |
| Anechoic Chamber   | SY Corporation                | L x W x H<br>(9.6 m x 6.4 m x 6.6 m) | N/A            | N.C.R.        | N/A          | N.C.R.        |
| Shield Room        | SY Corporation                | L x W x H<br>(6.5 m x 3.5 m x 3.5 m) | N/A            | N.C.R.        | N/A          | N.C.R.        |
| Preamplifier       | H.P.                          | 8447F                                | 2944A03909     | Aug. 27, 2015 | Annual       | Aug. 27, 2016 |
| Preamplifier       | R&S                           | SCU 18                               | 10117          | Apr. 10, 2015 | Annual       | Apr. 10, 2016 |
| Preamplifier       | MITEQ Inc.                    | JS44-18004000-35-8P                  | 1546891        | May 07, 2015  | Annual       | May 07, 2016  |
| Bilog Antenna      | SCHWARZBECK<br>MESSELEKTRONIK | VULB9163                             | 396            | Jun. 18, 2015 | Biennial     | Jun. 18, 2017 |
| Loop Antenna       | SCHWARZBECK<br>MESSELEKTRONIK | FMZB 1519                            | 1519-039       | Aug. 19, 2015 | Biennial     | Aug. 19, 2017 |
| Horn Antenna       | R&S                           | HF906                                | 100326         | Dec. 10, 2013 | Biennial     | Dec. 10, 2015 |
| Horn Antenna       | SCHWARZBECK<br>MESSELEKTRONIK | BBHA9170                             | BBHA9170431    | May. 15, 2014 | Biennial     | May. 15, 2016 |
| Test Receiver      | R&S                           | ESU26                                | 100109         | Mar. 03, 2015 | Annual       | Mar. 03, 2016 |
| Test Receiver      | R&S                           | ESCI 7                               | 100911         | Dec. 24, 2014 | Annual       | Dec. 24, 2015 |
| Two-Line V-Network | R&S                           | ENV216                               | 100190         | Dec. 25, 2014 | Annual       | Dec. 25, 2015 |

### Remark;

Radiated test period: Oct. 13, 2015 ~ Oct. 21, 2015

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

## 1.6. Summary of Test Results

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part15 Subpart C § 15.247 |  |          |
|---|--|----------|
| Standard section                                | Test Item(s)   | Result   |
| 15.205<br>15.209<br>15.247(d)                   | Transmitter Radiated Spurious Emissions<br>Conducted Spurious Emission | Complied |
| 15.247(b)(3)                                    | Maximum Conducted Output Power   | Complied |
| 15.207  | Transmitter AC Power Line Conducted Emission                           | Complied |

## 1.7. Test Procedure(s)

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009) and the guidance provided in KDB 558074\_v03r03 were used in the measurement of the DUT.

## 1.8. Sample calculation

Where relevant, the following sample calculation is provided:

### 1.8.1. Conducted test

Offset value (dB) = Attenuator (dB) + Cable loss (dB)

### 1.8.2. Radiation test

Field strength level (dB $\mu$ V/m) = Measured level (dB $\mu$ V) + Antenna factor (dB) + Cable loss (dB) - amplifier gain(dB)

## 1.9. Test report revision

| Revision | Report number          | Date of Issue | Description   |
|----------|------------------------|---------------|---|
| 0        | F690501/RF-RTL009200   | 2015.10.22    | Initial   |
| 1        | F690501/RF-RTL009200-1 | 2015.12.15    | Tested conducted spurious emission and maximum conducted output power items |

### Remark;

Conducted test period: Dec. 11, 2015 ~ Dec. 15, 2015

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*


**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

## 2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission


### 2.1. Test Setup

#### 2.1.1. Transmitter Radiated Spurious Emissions

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

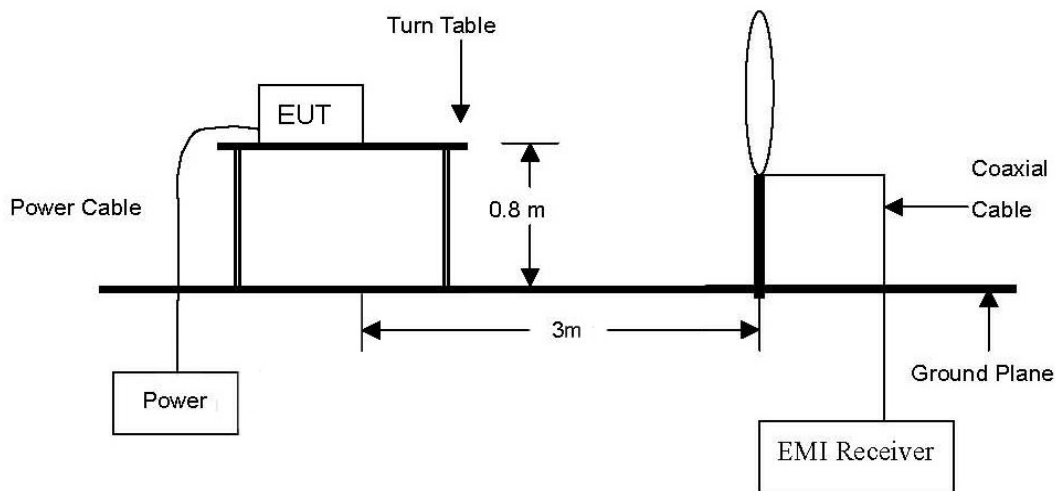


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

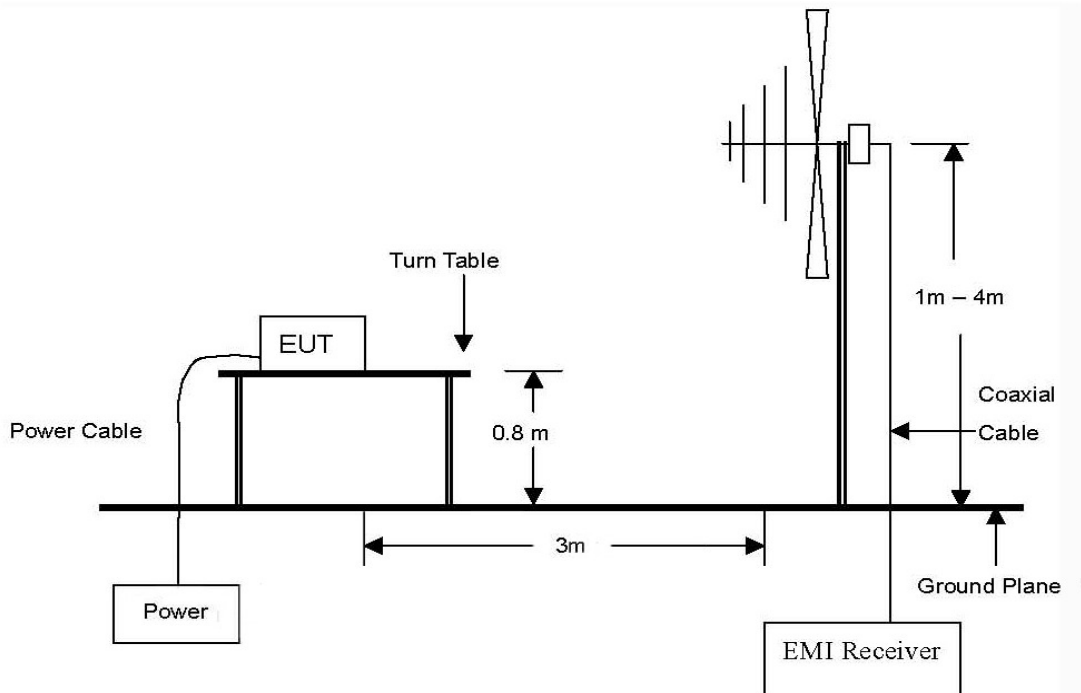


*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

The diagram below shows the test setup that is utilized to make the measurements for emission. The spurious emissions were investigated from 1 GHz to the 10th harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

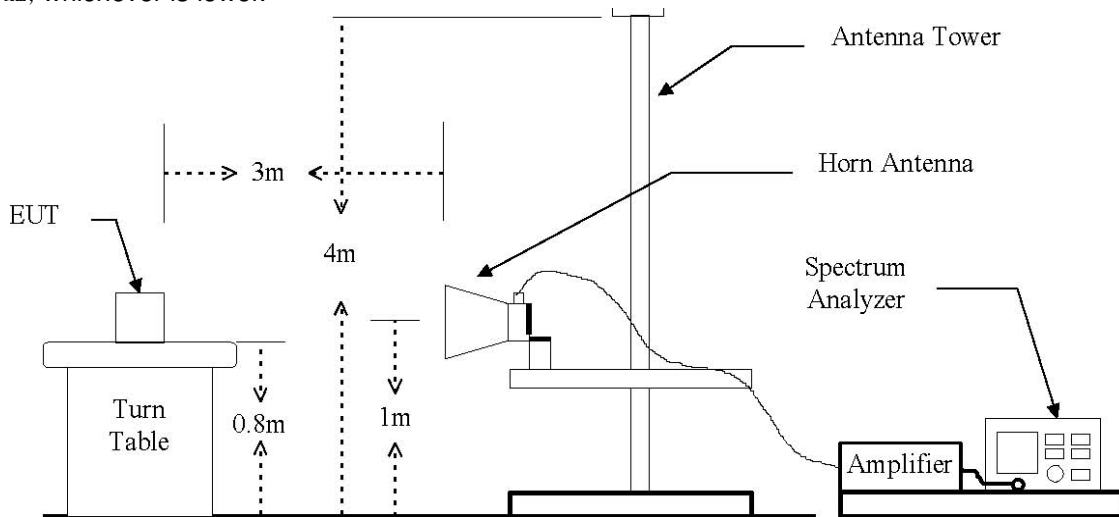

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 2.1.2. Conducted Spurious Emission

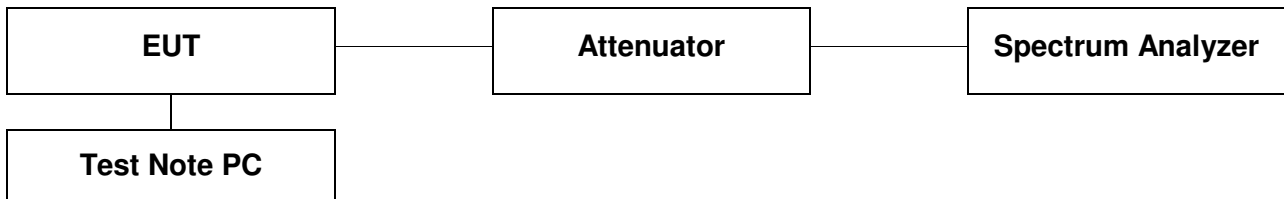

### 2.2. Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which fall in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to § 15.209(a), Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

| Frequency (MHz) | Distance (Meters) | Field Strength (dB $\mu$ V/m) | Field Strength ( $\mu$ V/m) |
|-----------------|-------------------|-------------------------------|-----------------------------|
| 0.009 – 0.490   | 300               | 20 log (2 400/F(kHz))         | 2 400/F(kHz)                |
| 0.490 – 1.705   | 30                | 20 log (24 000/F(kHz))        | 24 000/F(kHz)               |
| 1.705 – 30.0    | 30                | 29.54                         | 30                          |
| 30 - 88         | 3                 | 40.0                          | 100                         |
| 88 – 216        | 3                 | 43.5                          | 150                         |
| 216 – 960       | 3                 | 46.0                          | 200                         |
| Above 960       | 3                 | 54.0                          | 500                         |

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>



## 2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates in section 11.0 & 12.0 of KDB 558074\_v03r03 and ANSI C63.10-2009.

### 2.3.1. Test Procedures for emission below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum Hold Mode.

### 2.3.2. Test Procedures for emission from above 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a bi-log antenna, a horn antenna and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

NOTE;

All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

1. Unwanted Emissions into Non-Restricted Frequency Bands

- The Reference Level Measurement refer to section 11.2

Set analyzer center frequency to DTS channel center frequency, SPAN  $\geq 1.5$  times the DTS bandwidth, the RBW = 100 kHz and VBW  $\geq 3 \times$  RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold.

- Unwanted Emissions Level Measurement refer to section 11.3

Set the center frequency and span to encompass frequency range to be measured, the RBW = 100 kHz and VBW  $\geq 3 \times$  RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold.

2. Unwanted Emissions into Restricted Frequency Bands

- Peak Power measurement procedure refer to section 12.2.4

Set RBW = as specified in Table 1, VBW  $\geq 3 \times$  RBW, Detector = Peak, Sweep time = auto, Trace = Max hold.

**Table 1- RBW as a function of frequency**

| Frequency      | RBW           |
|----------------|---------------|
| 9 – 150 kHz    | 200 – 300 Hz  |
| 0.15 – 30 MHz  | 9 – 10 kHz    |
| 30 – 1 000 MHz | 100 – 120 kHz |
| >1 000 MHz     | 1 MHz         |

- Average Power measurements procedure refer to section 12.2.5.1.

Set RBW = 1 MHz, VBW  $\geq 3 \times$  RBW, Detector = RMS, if span/(# of points in sweep)  $\leq$ (RBW/2).

Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.

Averaging type = power(i.e., RMS). Sweep time = auto, Perform a trace average of at least 100 traces.

3. To get a maximum emission level from the EUT, the EUT is manipulated through three orthogonal planes (X, Y, Z). Worst orthogonal plan of EUT is **X – axis** during radiation test.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

### 2.3.3. Test Procedures for Conducted Spurious Emissions

All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

Per the guidance of KDB 558074\_v03r03, section 11.1 & 11.2 & 11.3, the reference level for out of band emissions is established from the plots of this section since the band edge emissions are measured with a RBW of 100 kHz. This reference level is then used as the limit in subsequent plots for out of band spurious emissions shown in section 2.4.3. The limit for out of band spurious emission at the band edge is 20 dB below the fundamental emission level measured in a 100 kHz bandwidth.

#### 1. Reference level measurement

- The Measurement refer to section 11.2

Set instrument center frequency to DTS channel center frequency, set the span to  $\geq 1.5$  times the DTS bandwidth. the RBW = 100 kHz and VBW  $\geq 3 \times$  RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold, The trace was allowed to stabilize.

#### 2. Conducted Emissions at Band Edge

- The Measurement refer to section 11.3

Set the center frequency and span to encompass frequency range to be measured, the RBW = 100 kHz and VBW  $\geq 3 \times$  RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold, Ensure that the number of measurement points  $\geq$  span/RBW, The trace was allowed to stabilize.

#### 3. Conducted Spurious Emissions

- The Measurement refer to section 11.3

Start frequency was set to 32.768 kHz and stop frequency was set to 26.5 GHz (separated into two plots per channel), RBW = 100 kHz, VBW  $\geq 3 \times$  RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold, The trace was allowed to stabilize.

#### 4. Correction function

- For plots showing conducted spurious emissions from 32.768 kHz to 26.5 GHz, all path loss of wide frequency range was investigated and compensated to spectrum analyzer as TDF function. So, the reading values shown in plots were final result.

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210mm x 297mm)

## 2.4. Test Results

Ambient temperature : (24 ± 1) °C  
 Relative humidity : 47 % R.H.

### 2.4.1. Radiated Spurious Emission

The frequency spectrum from 32.768 kHz to 1 000 MHz was investigated. All reading values are applied for peak values per frequency band.

| Radiated Emissions |                |             | Ant. | Correction Factors |               | Total           | FCC Limit      |             |
|--------------------|----------------|-------------|------|--------------------|---------------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | AMP + CL (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 65.37              | 42.70          | Peak        | H    | 12.19              | -26.46        | 28.43           | 40.00          | 11.57       |
| 67.14              | 52.60          | Peak        | V    | 11.02              | -26.42        | 37.20           | 40.00          | 2.80        |
| 191.99             | 50.60          | Peak        | H    | 11.07              | -24.74        | 36.93           | 43.50          | 6.57        |
| 192.03             | 51.80          | Peak        | V    | 10.59              | -24.74        | 37.65           | 43.50          | 5.85        |
| 237.14             | 49.40          | Peak        | V    | 13.41              | -24.51        | 38.30           | 46.00          | 7.70        |
| 384.01             | 45.40          | Peak        | V    | 16.65              | -23.94        | 38.11           | 46.00          | 7.89        |
| 448.03             | 46.90          | Peak        | V    | 17.27              | -24.55        | 39.62           | 46.00          | 6.38        |
| 576.03             | 47.00          | Peak        | V    | 19.02              | -23.97        | 42.05           | 46.00          | 3.95        |
| 704.07             | 44.70          | Peak        | H    | 20.37              | -23.91        | 41.16           | 46.00          | 4.84        |
| Above 800.00       | Not detected   | -           | -    | -                  | -             | -               | -              | -           |

Remark:

- Spurious emissions for all channels and modes were investigated and almost the same below 1 GHz.
- Reported spurious emissions are in **11b / 1 Mbps / High channel** as worst case among other modes.
- Radiated spurious emission measurement as below  
(Actual = Reading + AF + AMP + CL)
- The device has a reference clock operating 32.768 kHz.
- According to § 15.31(o), Emission levels are not reported much lower than the limits by over 20 dB.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

## 2.4.2. Spurious Radiated Emission

The frequency spectrum above 1 000 MHz was investigated.

### DSSS: 802.11b

Low Channel (2 412 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |         | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *2 310.00          | 19.98                | Peak        | H    | 27.77              | 10.86   | 58.61                 | 74.00                | 15.39       |
| *2 310.00          | 9.89                 | Average     | H    | 27.77              | 10.86   | 48.52                 | 54.00                | 5.48        |
| *2 385.76          | 21.05                | Peak        | H    | 28.11              | 9.88    | 59.04                 | 74.00                | 14.96       |
| *2 385.76          | 11.10                | Average     | H    | 28.11              | 9.88    | 49.09                 | 54.00                | 4.91        |
| *2 390.00          | 20.66                | Peak        | H    | 28.08              | 9.86    | 58.60                 | 74.00                | 15.40       |
| *2 390.00          | 10.77                | Average     | H    | 28.08              | 9.86    | 48.71                 | 54.00                | 5.29        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 824.25          | 36.69                | Peak        | V    | 32.78              | -29.00      | 40.47                 | 74.00                | 33.53       |
| *4 824.25          | 34.60                | Average     | V    | 32.78              | -29.00      | 38.38                 | 54.00                | 15.62       |
| Above 4 900.00     | Not detected         | -           | -    | -                  | -           | -                     | -                    | -           |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

## Middle Channel (2 437 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 874.18          | 40.01                | Peak        | V    | 33.01              | -28.02      | 45.00                 | 74.00                | 29.00       |
| *4 874.18          | 34.86                | Average     | V    | 33.01              | -28.02      | 39.85                 | 54.00                | 14.15       |
| Above 4 900.00     | Not detected         | -           | -    | -                  | -           | -                     | -                    | -           |

## High Channel (2 462 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |         | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *2 483.50          | 20.04                | Peak        | H    | 28.17              | 9.65    | 57.86                 | 74.00                | 16.14       |
| *2 483.50          | 10.62                | Average     | H    | 28.17              | 9.65    | 48.44                 | 54.00                | 5.56        |
| *2 485.96          | 20.45                | Peak        | H    | 28.20              | 9.68    | 58.33                 | 74.00                | 15.67       |
| *2 485.96          | 10.34                | Average     | H    | 28.20              | 9.68    | 48.22                 | 54.00                | 5.78        |
| *2 500.00          | 20.54                | Peak        | H    | 28.31              | 11.54   | 60.39                 | 74.00                | 13.61       |
| *2 500.00          | 10.00                | Average     | H    | 28.31              | 11.54   | 49.85                 | 54.00                | 4.15        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 923.96          | 41.13                | Peak        | V    | 33.12              | -28.98      | 45.27                 | 74.00                | 28.73       |
| *4 923.96          | 36.84                | Average     | V    | 33.12              | -28.98      | 40.98                 | 54.00                | 13.02       |
| Above 5 000.00     | Not detected         | -           | -    | -                  | -           | -                     | -                    | -           |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

**OFDM: 802.11g**

Low Channel (2 412 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |         | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *2 310.00          | 19.99                | Peak        | H    | 27.77              | 10.86   | 58.62                 | 74.00                | 15.38       |
| *2 310.00          | 9.96                 | Average     | H    | 27.77              | 10.86   | 48.59                 | 54.00                | 5.41        |
| *2 385.52          | 20.61                | Peak        | H    | 28.11              | 9.88    | 58.60                 | 74.00                | 15.40       |
| *2 385.52          | 10.08                | Average     | H    | 28.11              | 9.88    | 48.07                 | 54.00                | 5.93        |
| *2 390.00          | 19.52                | Peak        | H    | 28.08              | 9.86    | 57.46                 | 74.00                | 16.54       |
| *2 390.00          | 9.50                 | Average     | H    | 28.08              | 9.86    | 47.44                 | 54.00                | 6.56        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 824.17          | 40.12                | Peak        | V    | 32.78              | -29.00      | 43.90                 | 74.00                | 30.10       |
| *4 824.17          | 32.44                | Average     | V    | 32.78              | -29.00      | 36.22                 | 54.00                | 17.78       |
| Above 4 900.00     | Not detected         | -           | -    | -                  | -           | -                     | -                    | -           |

Middle Channel (2 437 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 873.90          | 39.37                | Peak        | V    | 33.01              | -28.02      | 44.36                 | 74.00                | 29.64       |
| *4 873.90          | 33.42                | Average     | V    | 33.01              | -28.02      | 38.41                 | 54.00                | 15.59       |
| Above 4 900.00     | Not detected         | -           | -    | -                  | -           | -                     | -                    | -           |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

## High Channel (2 462 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |         | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *2 483.50          | 20.94                | Peak        | H    | 28.17              | 9.65    | 58.76                 | 74.00                | 15.24       |
| *2 483.50          | 11.48                | Average     | H    | 28.17              | 9.65    | 49.30                 | 54.00                | 4.70        |
| *2 484.44          | 21.94                | Peak        | H    | 28.18              | 9.66    | 59.78                 | 74.00                | 14.22       |
| *2 484.44          | 11.25                | Average     | H    | 28.18              | 9.66    | 49.09                 | 54.00                | 4.91        |
| *2 500.00          | 20.44                | Peak        | H    | 28.31              | 11.54   | 60.29                 | 74.00                | 13.71       |
| *2 500.00          | 10.70                | Average     | H    | 28.31              | 11.54   | 50.55                 | 54.00                | 3.45        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 924.00          | 38.46                | Peak        | V    | 33.12              | -28.98      | 42.60                 | 74.00                | 31.40       |
| *4 924.00          | 33.58                | Average     | V    | 33.12              | -28.98      | 37.72                 | 54.00                | 16.28       |
| Above 5 000.00     | Not detected         | -           | -    | -                  | -           | -                     | -                    | -           |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>



**OFDM: 802.11n\_HT20**

Low Channel (2 412 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |         | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *2 310.00          | 20.01                | Peak        | H    | 27.77              | 10.86   | 58.64                 | 74.00                | 15.36       |
| *2 310.00          | 9.98                 | Average     | H    | 27.77              | 10.86   | 48.61                 | 54.00                | 5.39        |
| *2 385.68          | 20.63                | Peak        | H    | 28.11              | 9.88    | 58.62                 | 74.00                | 15.38       |
| *2 385.68          | 10.11                | Average     | H    | 28.11              | 9.88    | 48.10                 | 54.00                | 5.90        |
| *2 390.00          | 20.69                | Peak        | H    | 28.08              | 9.86    | 58.63                 | 74.00                | 15.37       |
| *2 390.00          | 10.89                | Average     | H    | 28.08              | 9.86    | 48.83                 | 54.00                | 5.17        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 824.04          | 40.30                | Peak        | V    | 32.78              | -29.00      | 44.08                 | 74.00                | 29.92       |
| *4 824.04          | 32.78                | Average     | V    | 32.78              | -29.00      | 36.56                 | 54.00                | 17.44       |
| Above 4 900.00     | Not detected         | -           | -    | -                  | -           | -                     | -                    | -           |

Middle Channel (2 437 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 873.94          | 39.33                | Peak        | V    | 33.01              | -28.02      | 44.32                 | 74.00                | 29.68       |
| *4 873.94          | 32.96                | Average     | V    | 33.01              | -28.02      | 37.95                 | 54.00                | 16.05       |
| Above 4 900.00     | Not detected         | -           | -    | -                  | -           | -                     | -                    | -           |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

## High Channel (2 462 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |         | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *2 483.50          | 20.13                | Peak        | H    | 28.17              | 9.65    | 57.95                 | 74.00                | 16.05       |
| *2 483.50          | 10.61                | Average     | H    | 28.17              | 9.65    | 48.43                 | 54.00                | 5.57        |
| *2 485.86          | 21.72                | Peak        | H    | 28.19              | 9.68    | 59.59                 | 74.00                | 14.41       |
| *2 485.86          | 11.00                | Average     | H    | 28.19              | 9.68    | 48.87                 | 54.00                | 5.13        |
| *2 500.00          | 20.90                | Peak        | H    | 28.31              | 11.54   | 60.75                 | 74.00                | 13.25       |
| *2 500.00          | 10.44                | Average     | H    | 28.31              | 11.54   | 50.29                 | 54.00                | 3.71        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 924.12          | 39.83                | Peak        | V    | 33.12              | -28.98      | 43.97                 | 74.00                | 30.03       |
| *4 924.12          | 33.36                | Average     | V    | 33.12              | -28.98      | 37.50                 | 54.00                | 16.50       |
| Above 5 000.00     | Not detected         | -           | -    | -                  | -           | -                     | -                    | -           |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

**OFDM: 802.11n\_HT40**

Low Channel (2 422 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |         | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *2 310.00          | 20.79                | Peak        | H    | 27.77              | 10.86   | 59.42                 | 74.00                | 14.58       |
| *2 310.00          | 10.12                | Average     | H    | 27.77              | 10.86   | 48.75                 | 54.00                | 5.25        |
| *2 339.68          | 19.98                | Peak        | H    | 28.05              | 11.49   | 59.52                 | 74.00                | 14.48       |
| *2 339.68          | 6.63                 | Average     | H    | 28.05              | 11.49   | 46.17                 | 54.00                | 7.83        |
| *2 390.00          | 20.24                | Peak        | H    | 28.08              | 9.86    | 58.18                 | 74.00                | 15.82       |
| *2 390.00          | 11.48                | Average     | H    | 28.08              | 9.86    | 49.42                 | 54.00                | 4.58        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 844.02          | 39.17                | Peak        | V    | 32.88              | -28.68      | 43.37                 | 74.00                | 30.63       |
| *4 844.02          | 32.91                | Average     | V    | 32.88              | -28.68      | 37.11                 | 54.00                | 16.89       |
| Above 4 900.00     | Not detected         | -           | -    | -                  | -           | -                     | -                    | -           |

Middle Channel (2 437 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 874.10          | 39.80                | Peak        | V    | 33.01              | -28.02      | 44.79                 | 74.00                | 29.21       |
| *4 874.10          | 32.61                | Average     | V    | 33.01              | -28.02      | 37.60                 | 54.00                | 16.40       |
| Above 4 900.00     | Not detected         | -           | -    | -                  | -           | -                     | -                    | -           |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

High Channel (2 452 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |         | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *2 483.50          | 21.80                | Peak        | H    | 28.17              | 9.65    | 59.62                 | 74.00                | 14.38       |
| *2 483.50          | 11.04                | Average     | H    | 28.17              | 9.65    | 48.86                 | 54.00                | 5.14        |
| *2 486.92          | 19.95                | Peak        | H    | 28.21              | 9.70    | 57.86                 | 74.00                | 16.14       |
| *2 486.92          | 10.65                | Average     | H    | 28.21              | 9.70    | 48.56                 | 54.00                | 5.44        |
| *2 500.00          | 21.29                | Peak        | H    | 28.31              | 11.54   | 61.14                 | 74.00                | 12.86       |
| *2 500.00          | 10.49                | Average     | H    | 28.31              | 11.54   | 50.34                 | 54.00                | 3.66        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             | Total                 | FCC Limit            |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 903.94          | 38.51                | Peak        | V    | 33.16              | -29.10      | 42.57                 | 74.00                | 31.43       |
| *4 903.94          | 32.04                | Average     | V    | 33.16              | -29.10      | 36.10                 | 54.00                | 17.90       |
| Above 5 000.00     | Not detected         | -           | -    | -                  | -           | -                     | -                    | -           |

Remarks :


1. "\*" means the restricted band.
2. Measuring frequencies from 1 GHz to the 10<sup>th</sup> harmonic of highest fundamental frequency.
3. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
4. Actual = Reading + AF + AMP + CL or Reading + AF + CL
5. According to § 15.31(o), Emission levels are not reported much lower than the limits by over 20 dB.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

## 2.4.3. Spurious RF Conducted Emissions: Plot of Spurious RF Conducted Emission DSSS: 802.11b (1 Mbps)

Low Channel

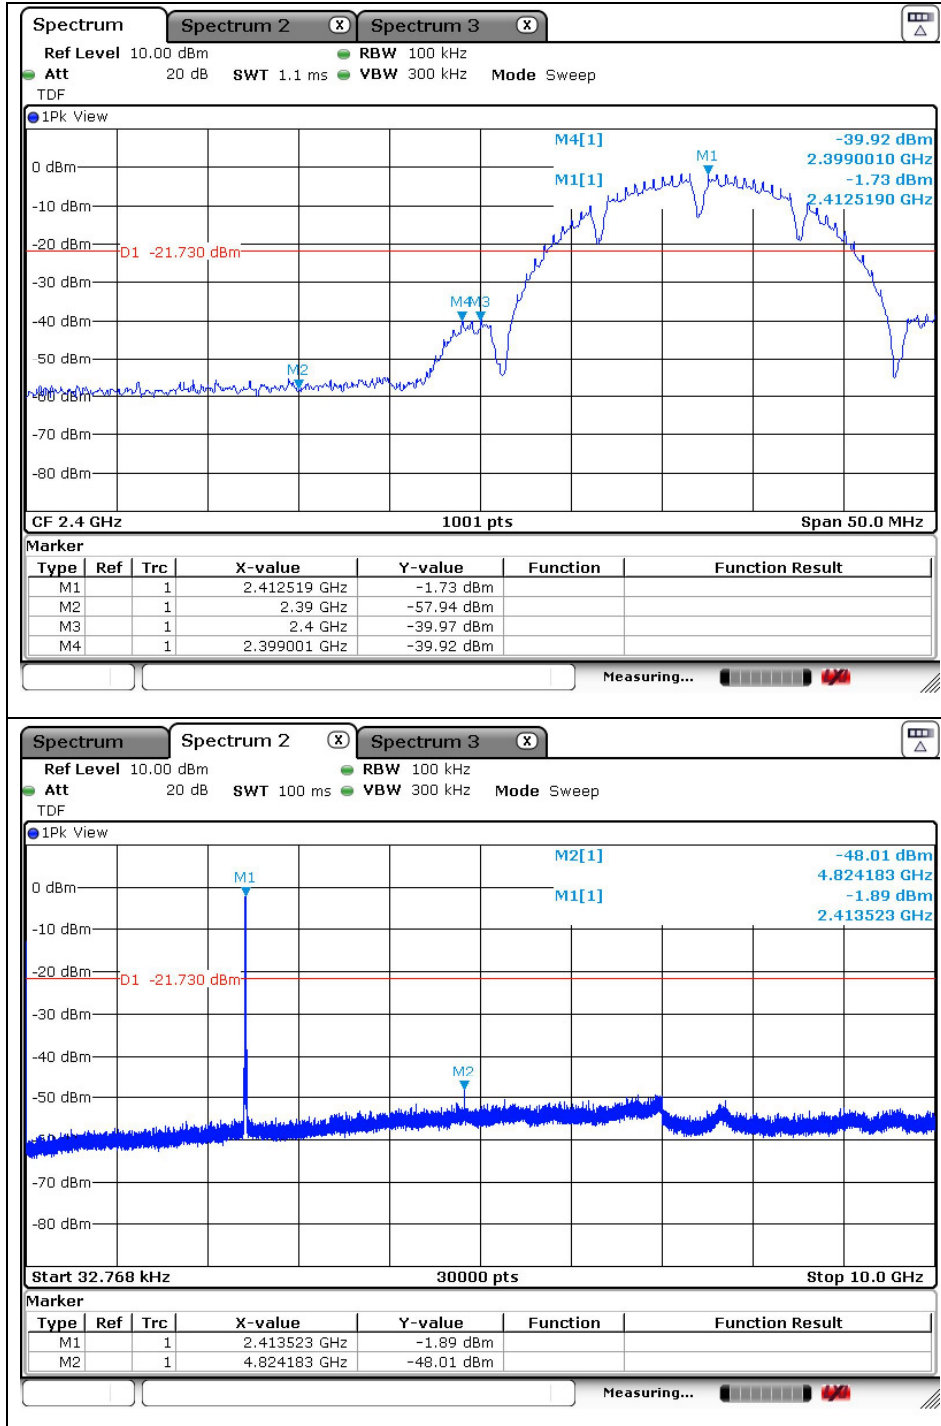


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

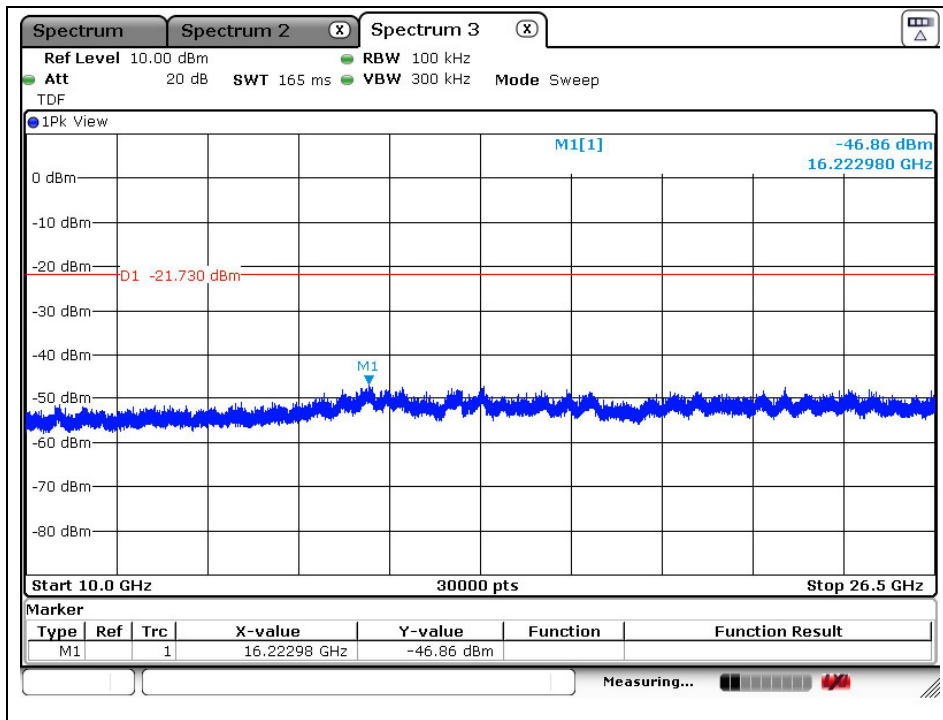


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

Middle Channel

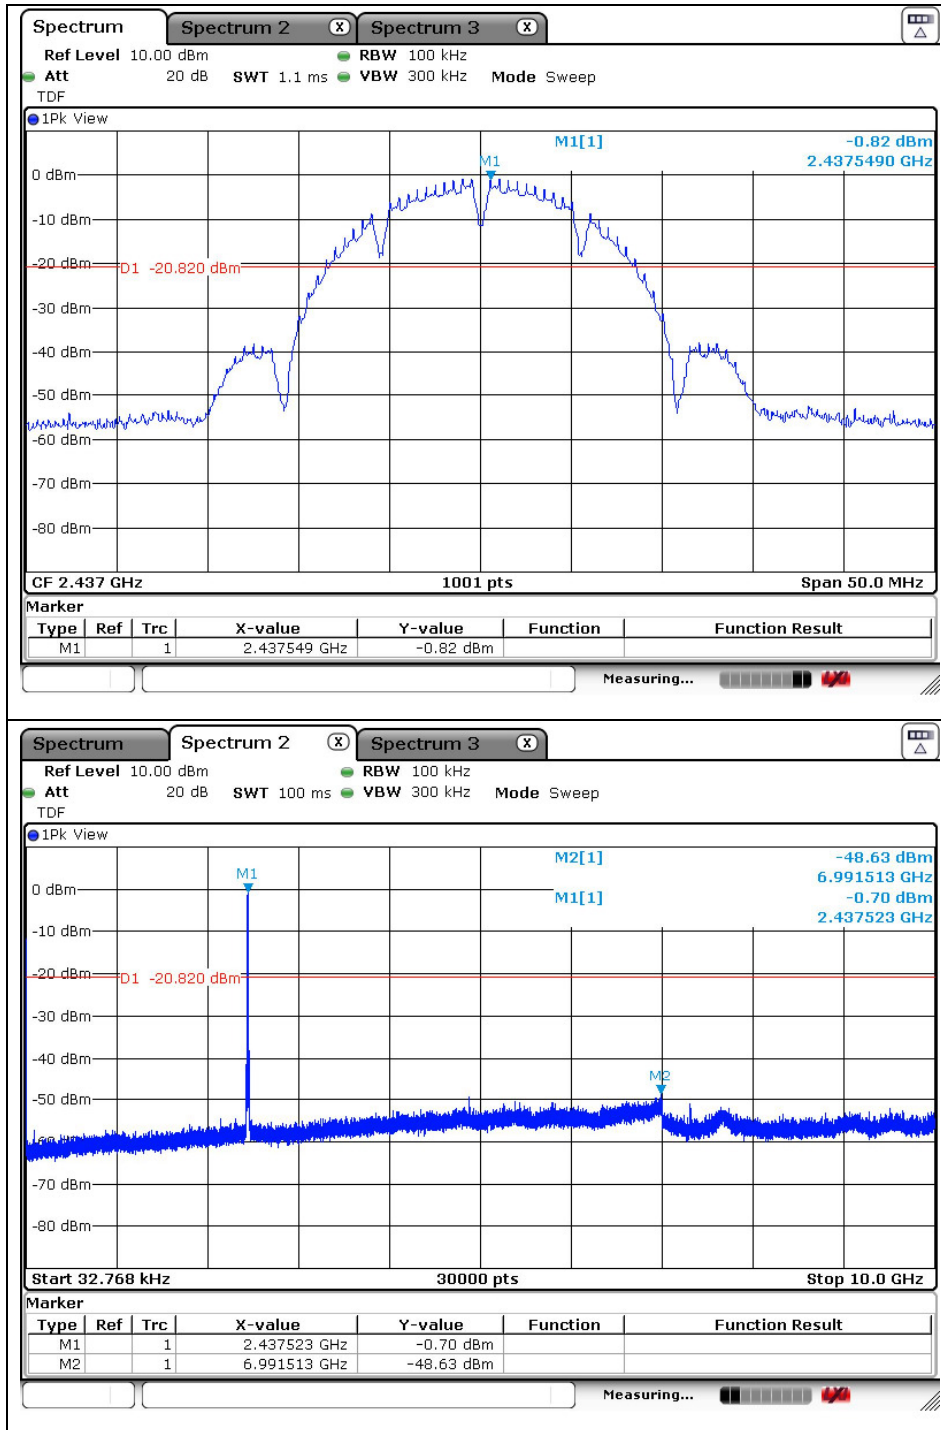

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

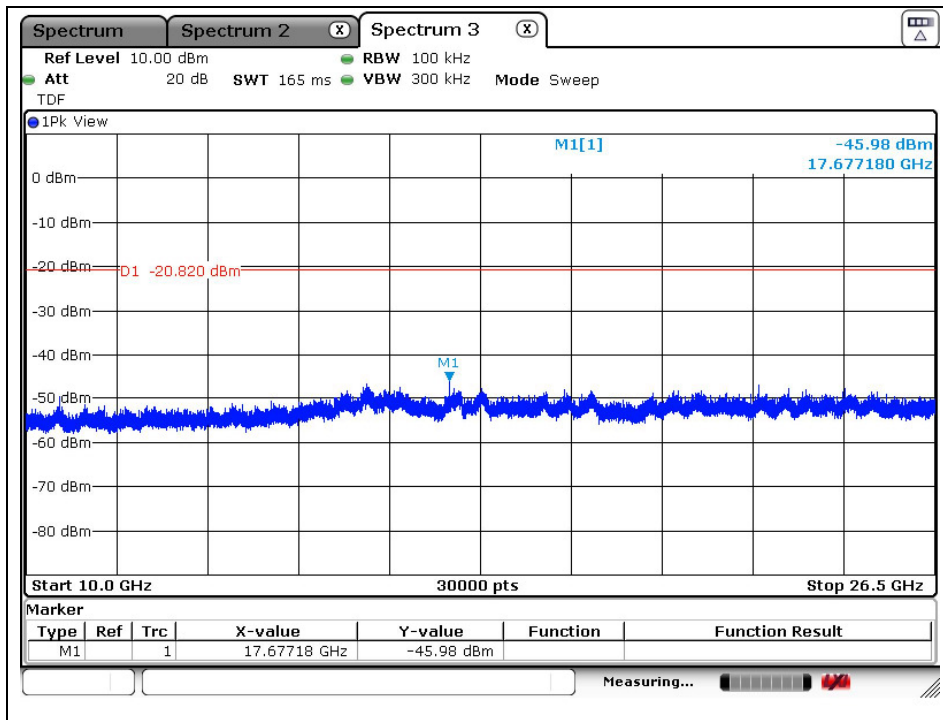


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>



High Channel

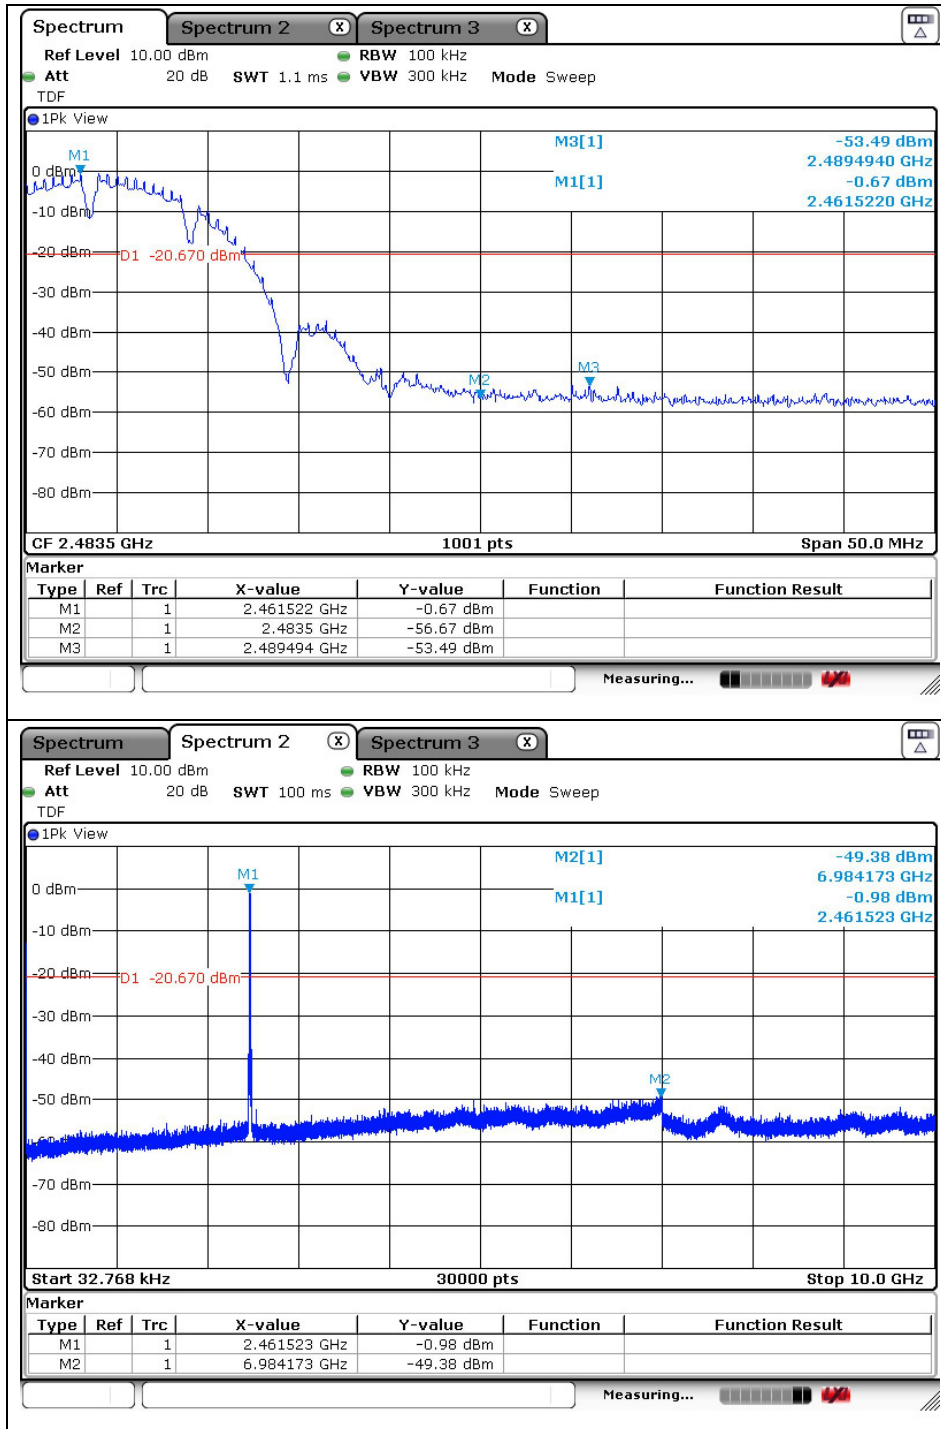

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

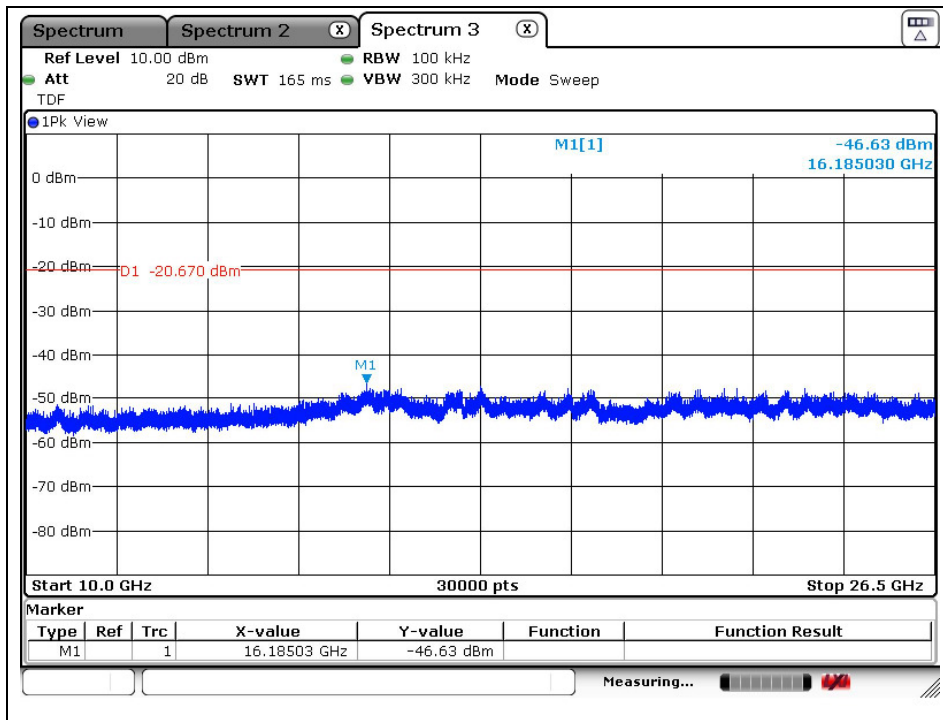


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


## OFDM: 802.11g (6 Mbps)

### Low Channel

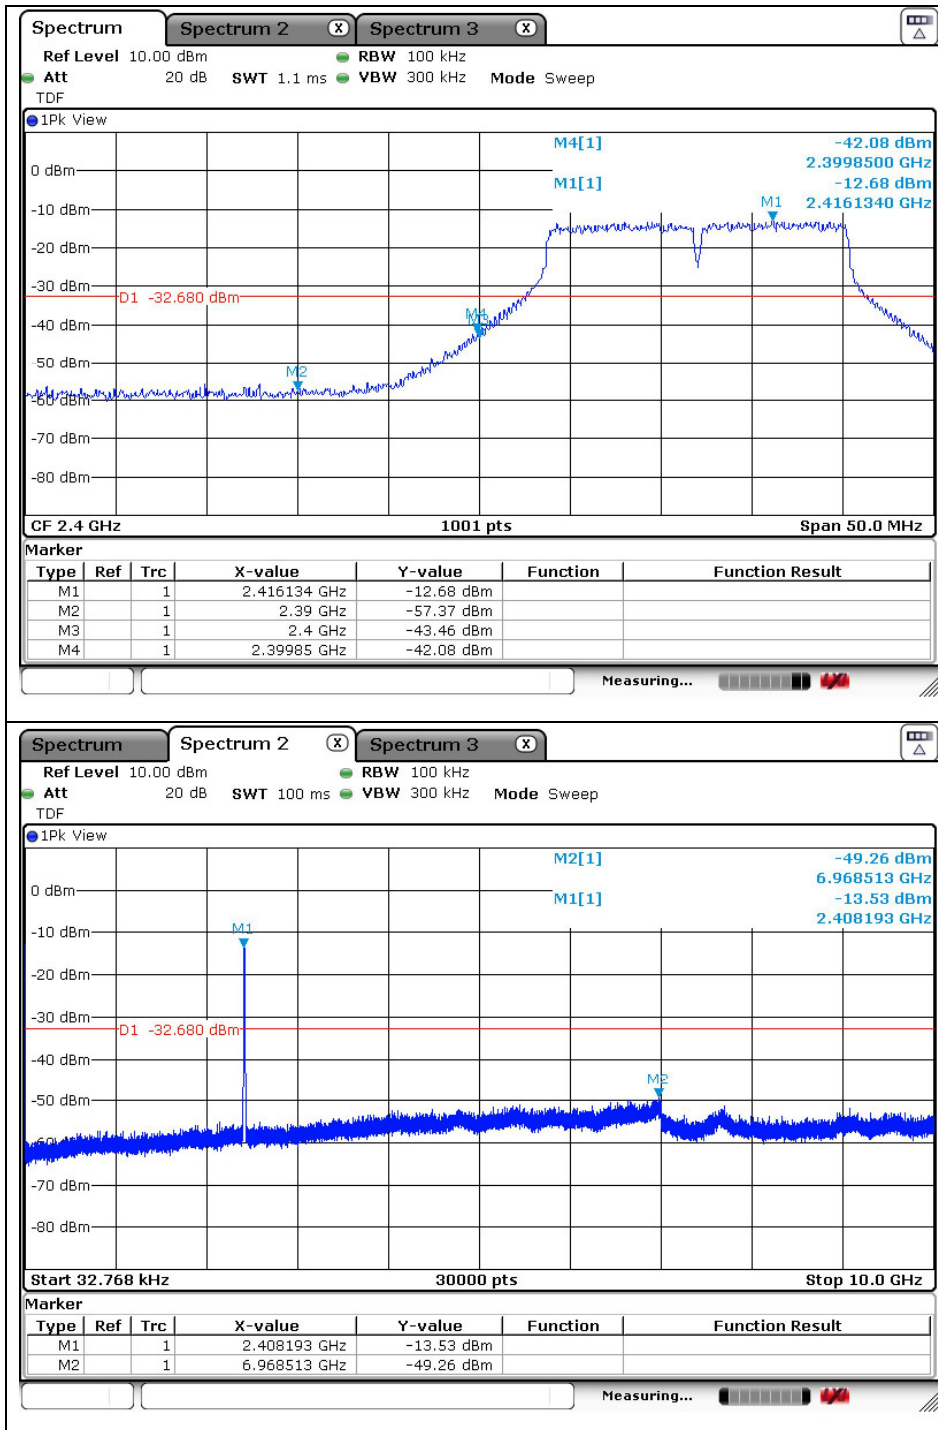

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

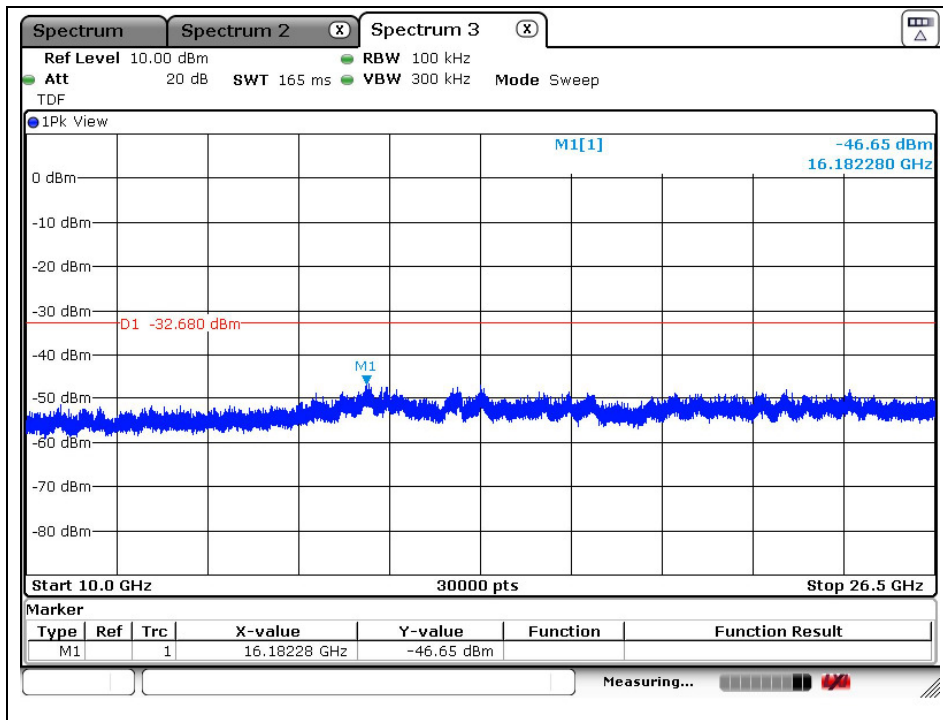


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

Middle Channel

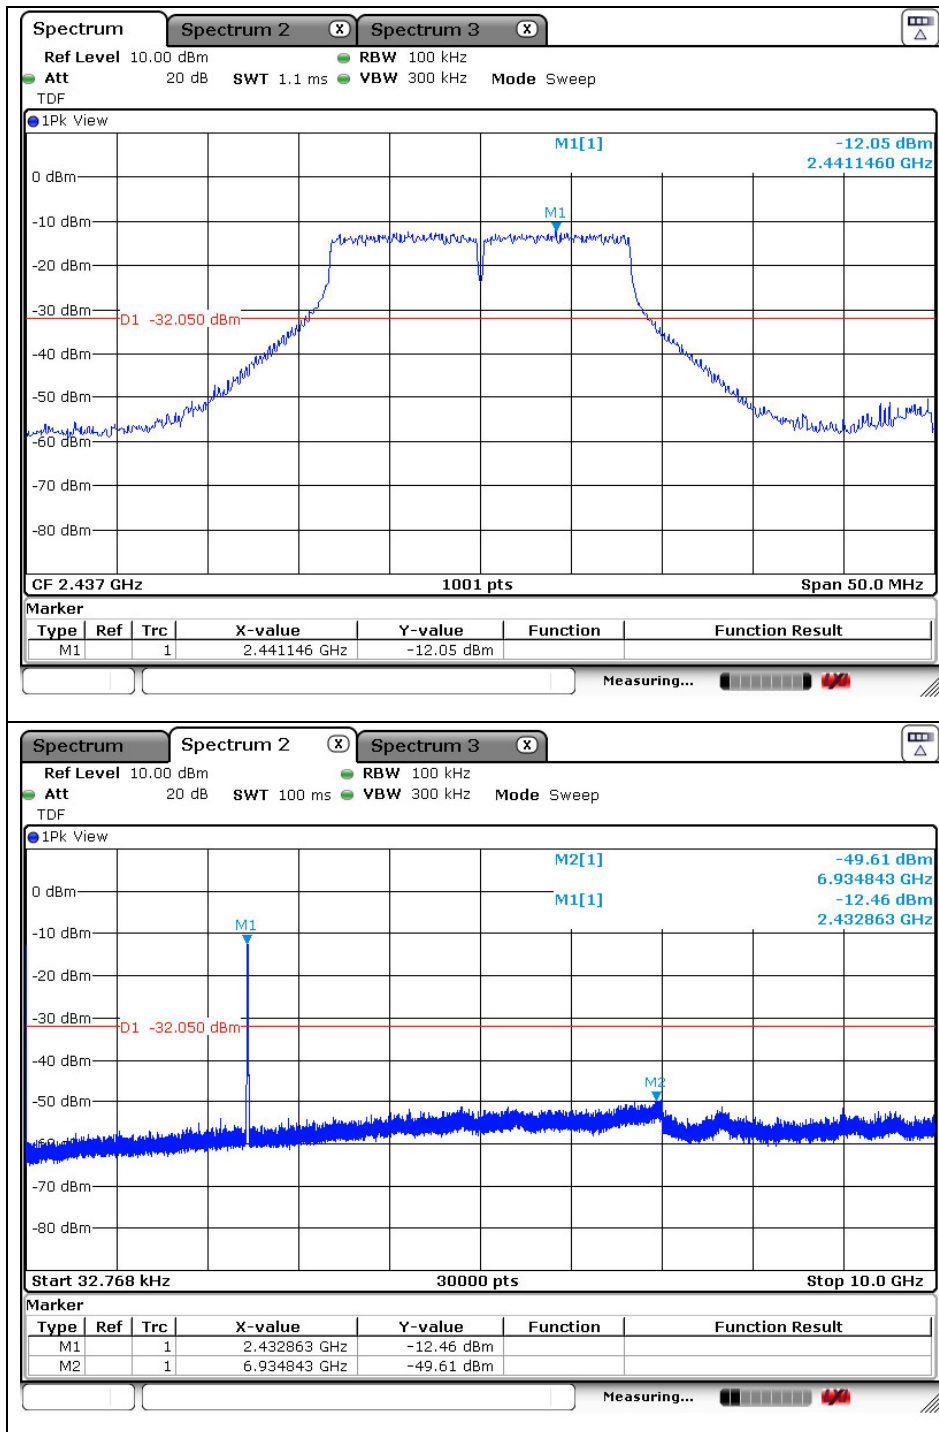


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

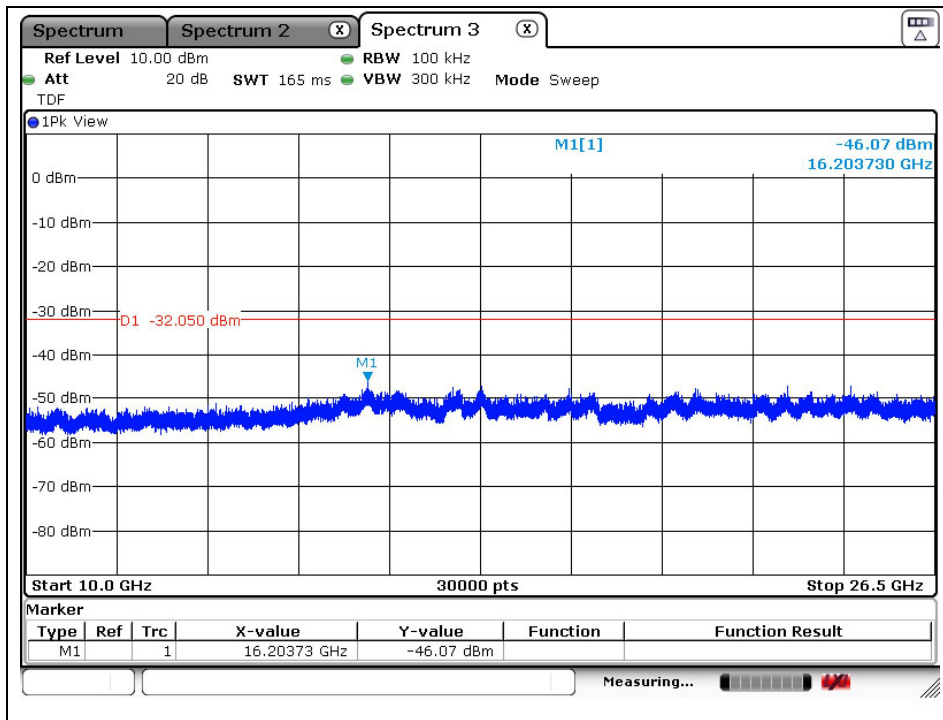


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

High Channel

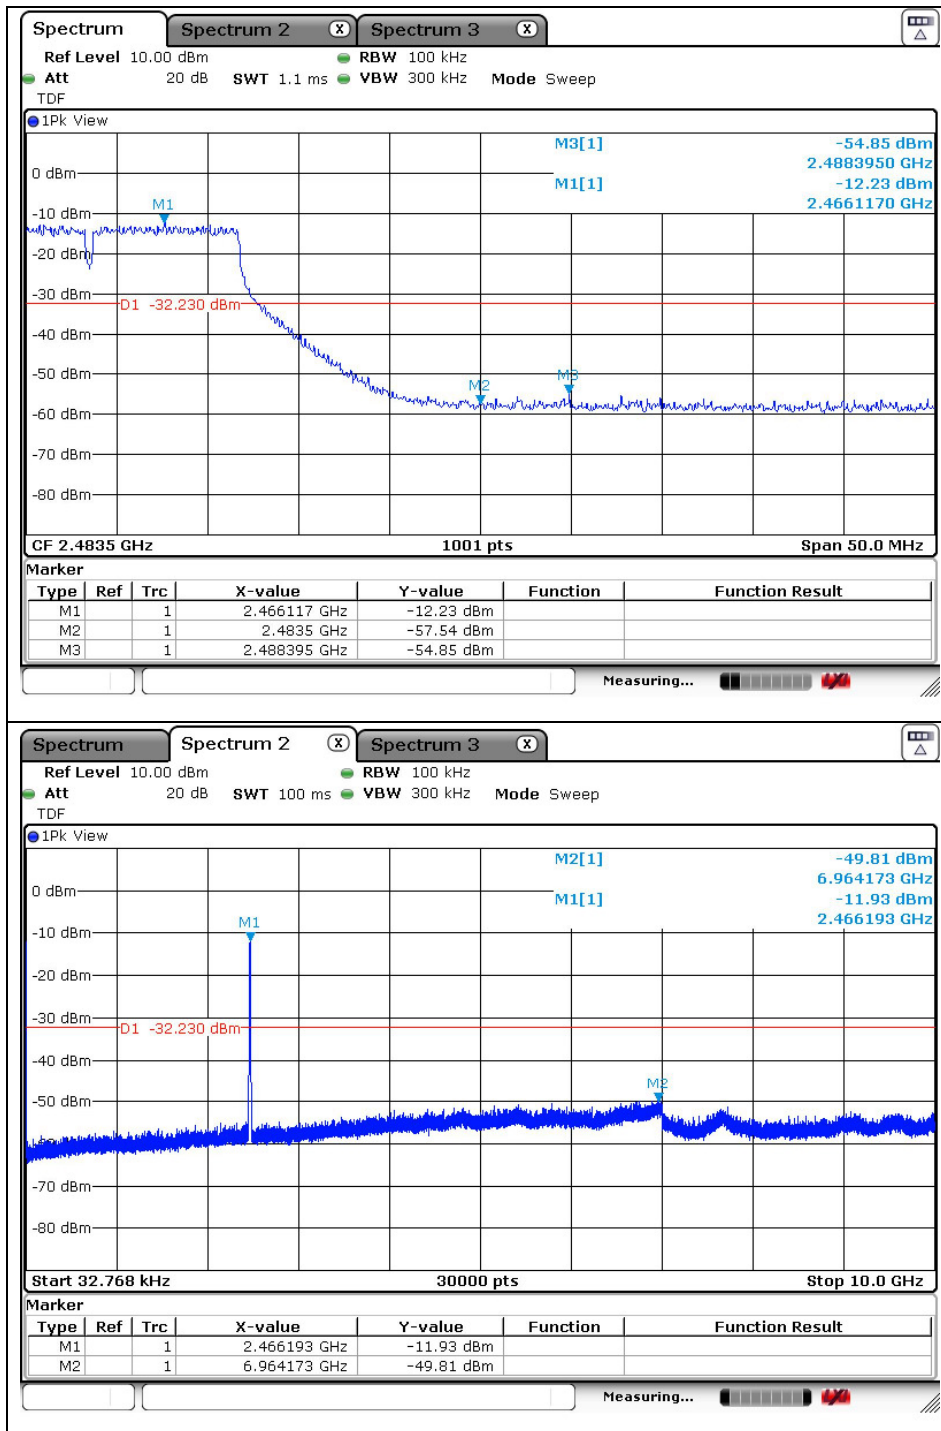

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

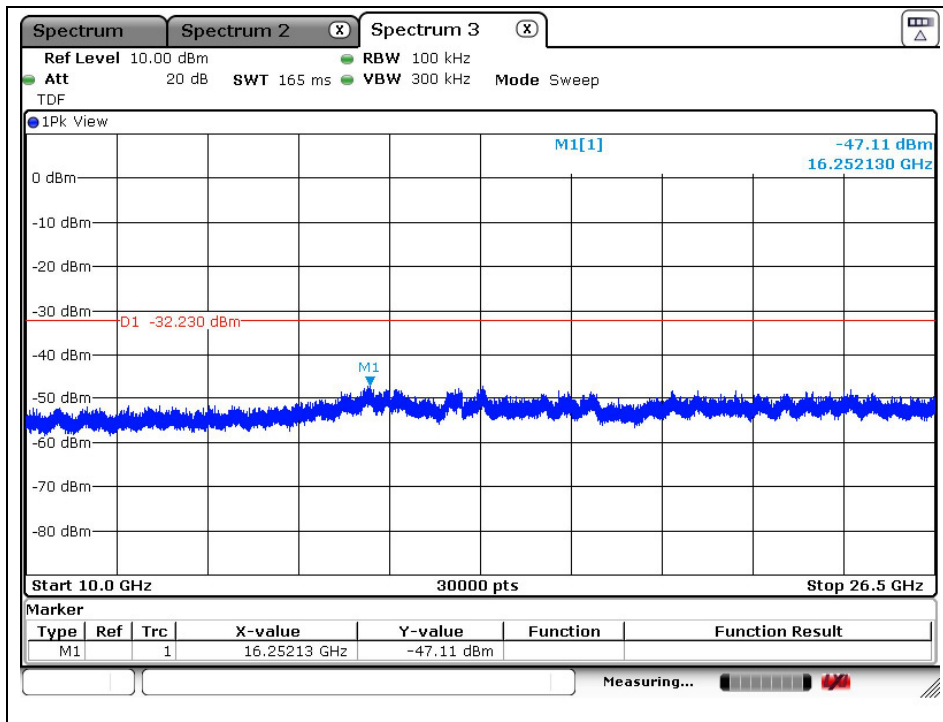


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>




## OFDM: 802.11n\_HT20 (MCS0)

Low Channel

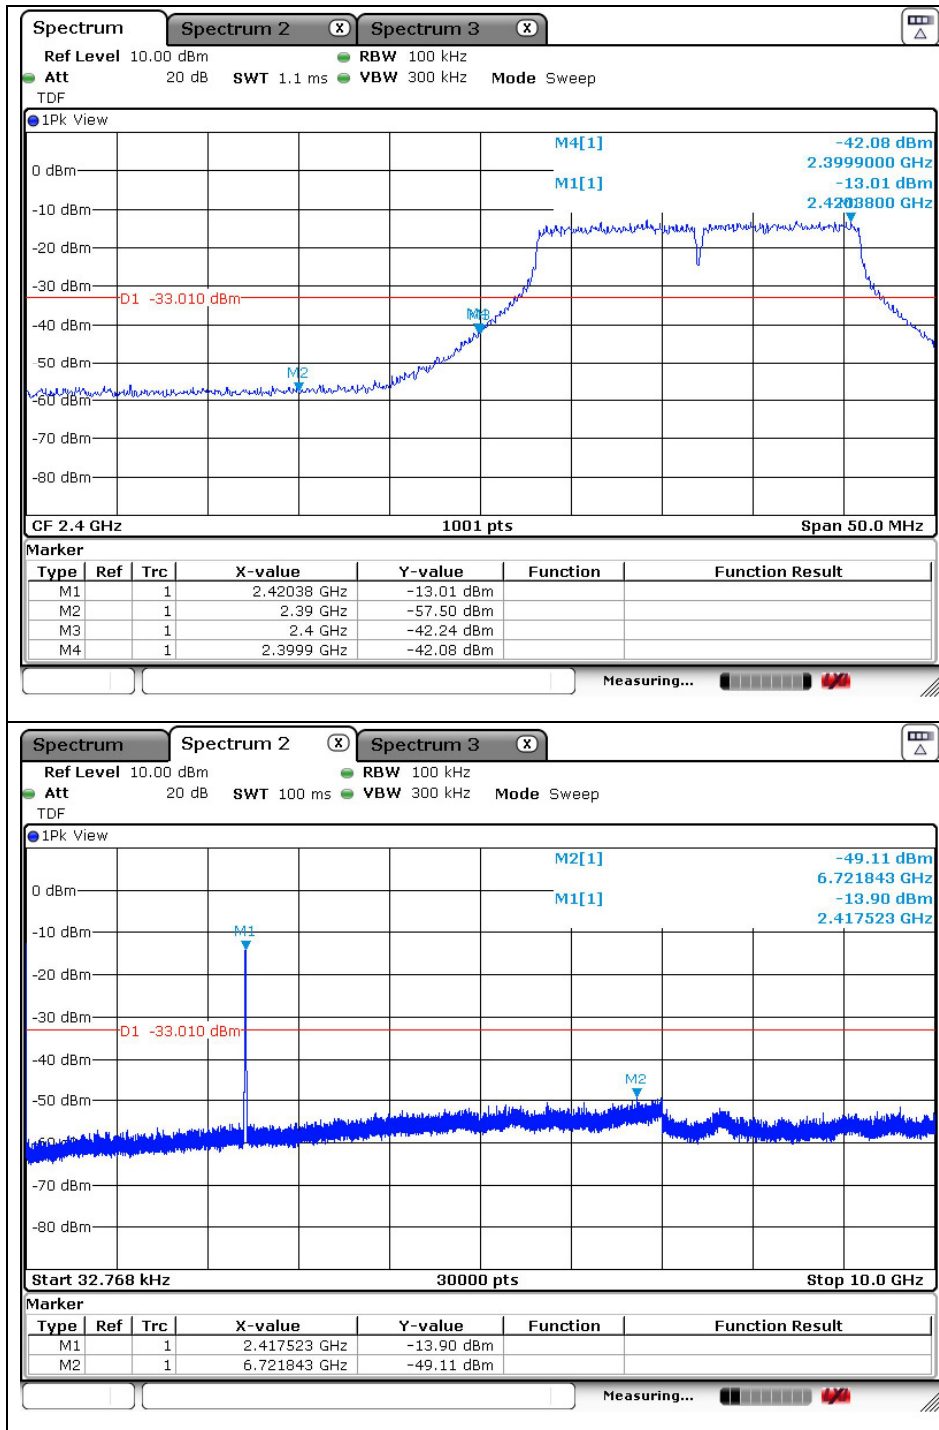

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

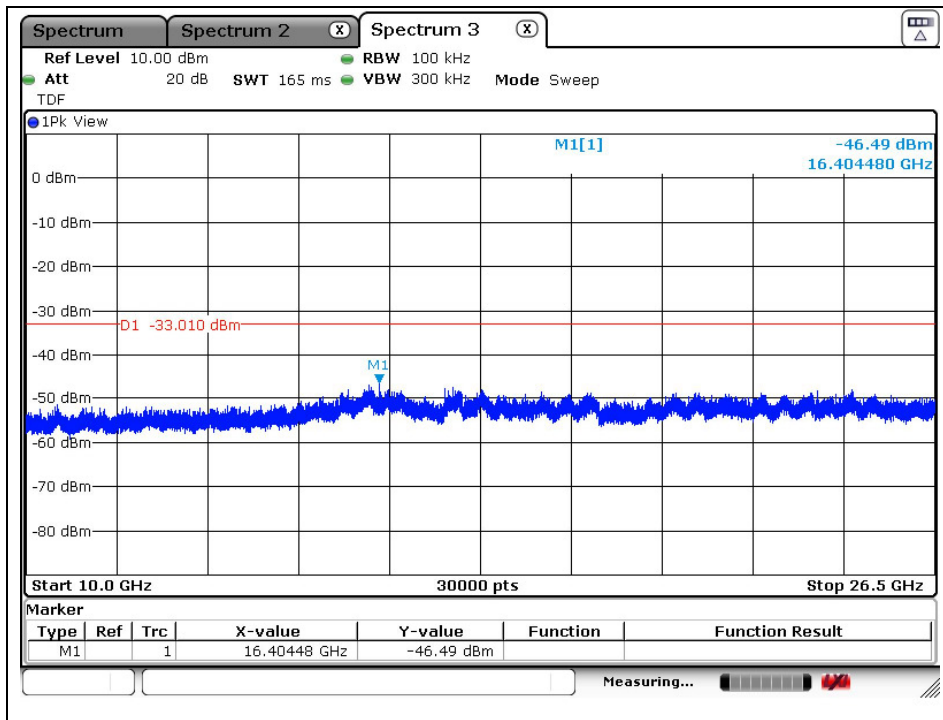


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

Middle Channel

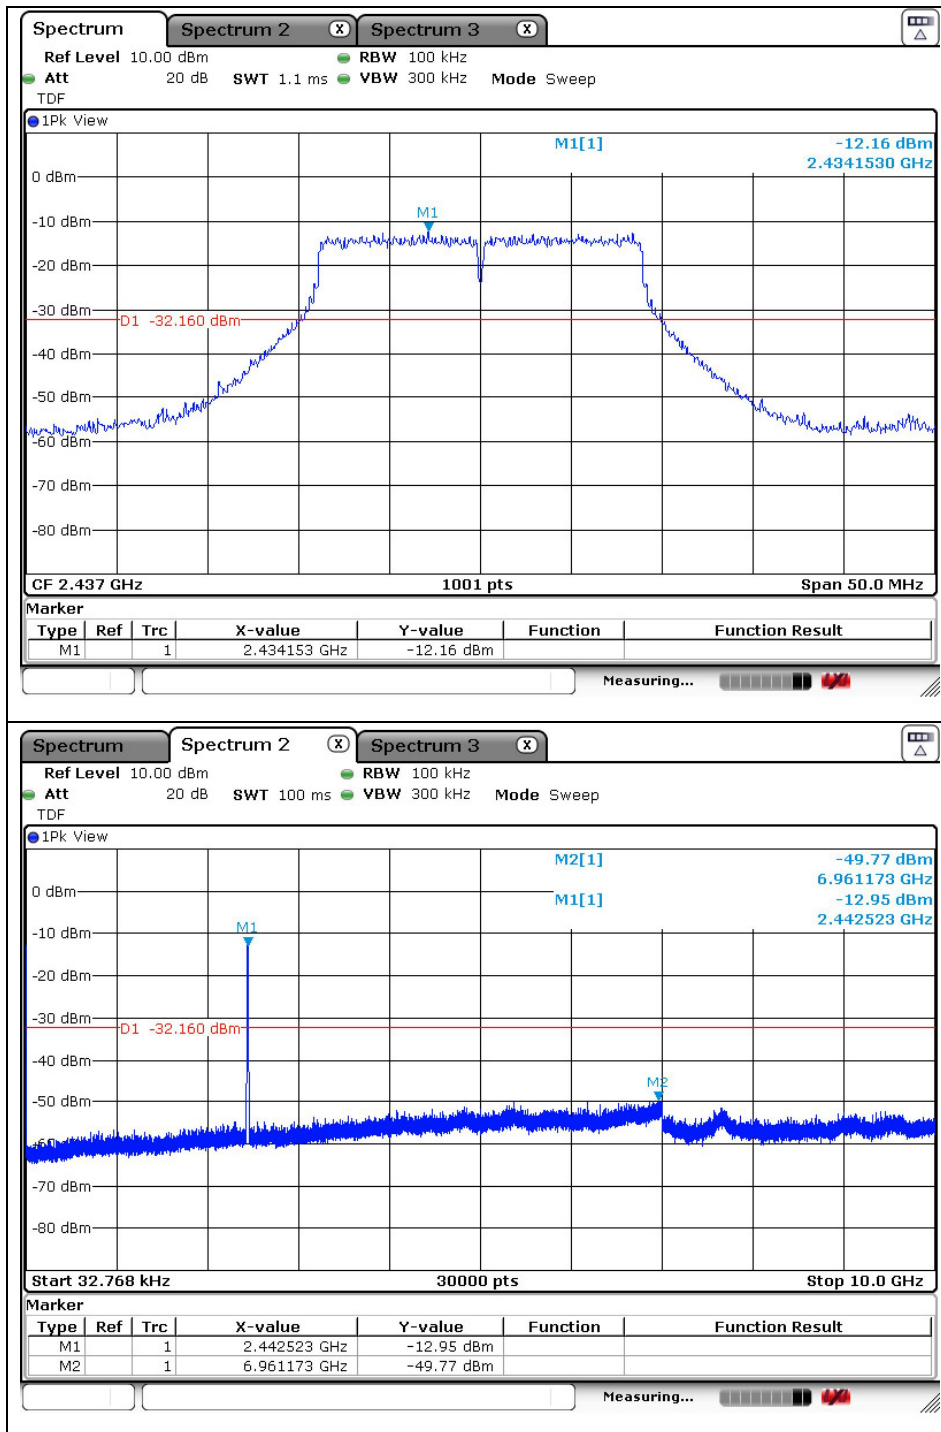


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

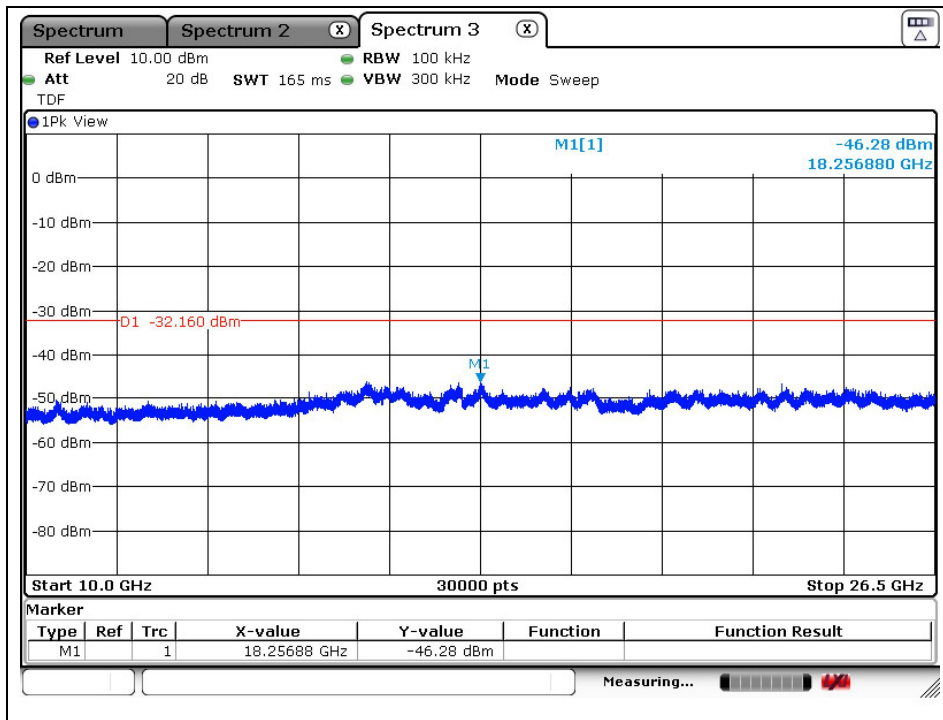


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

High Channel

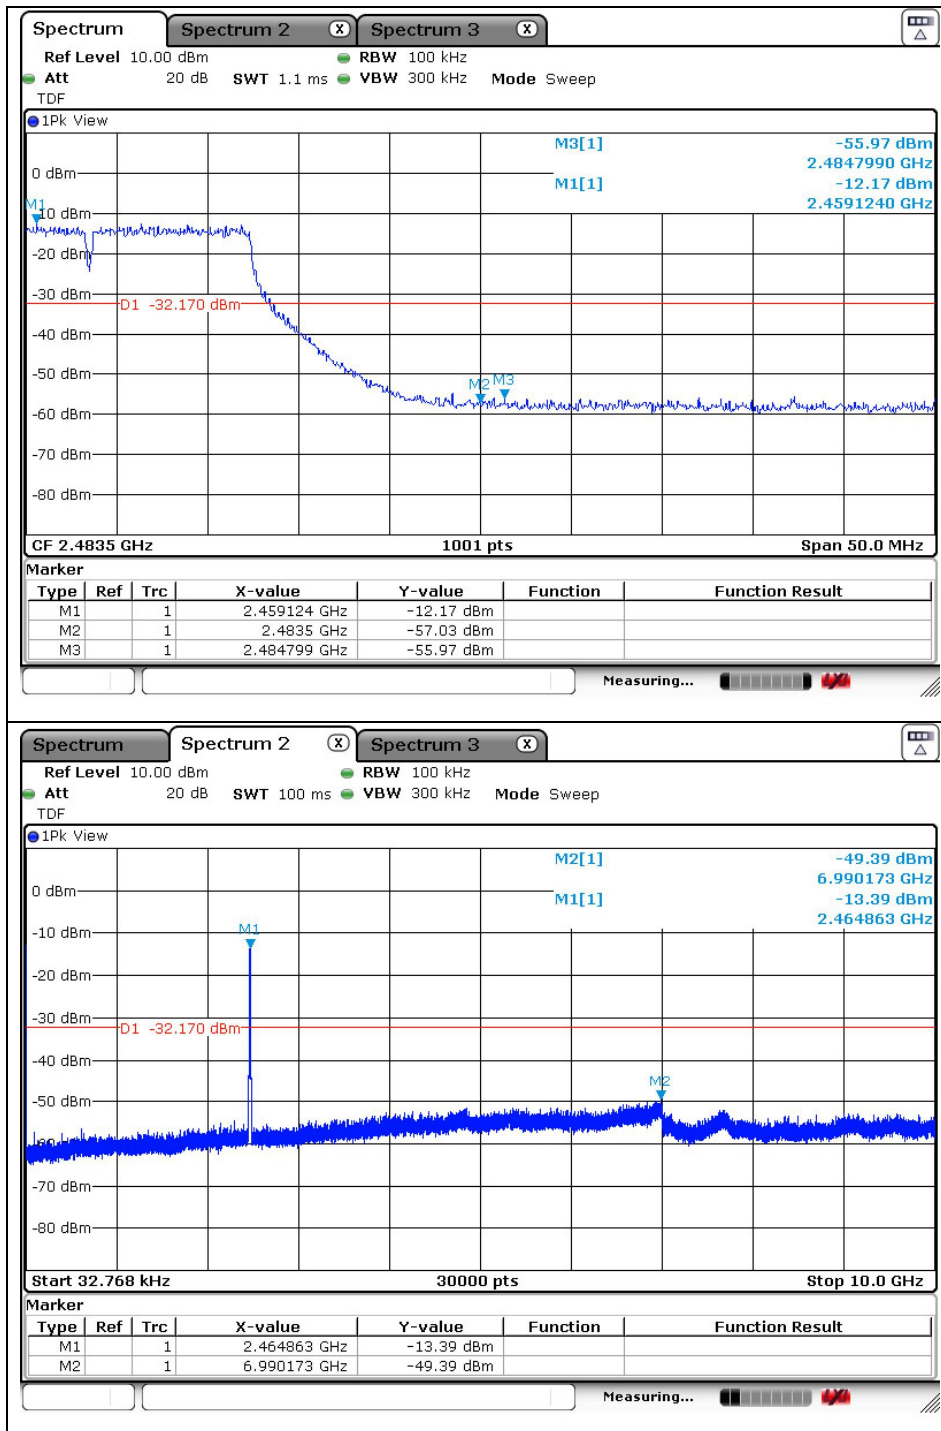

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

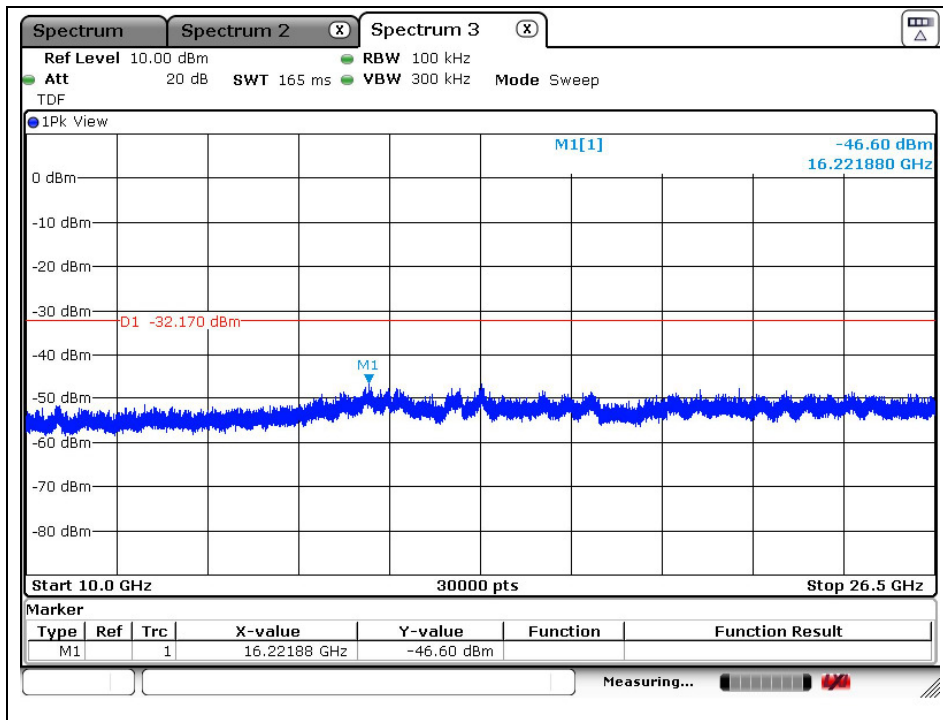


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


## OFDM: 802.11n\_HT40 (MCS0)

### Low Channel

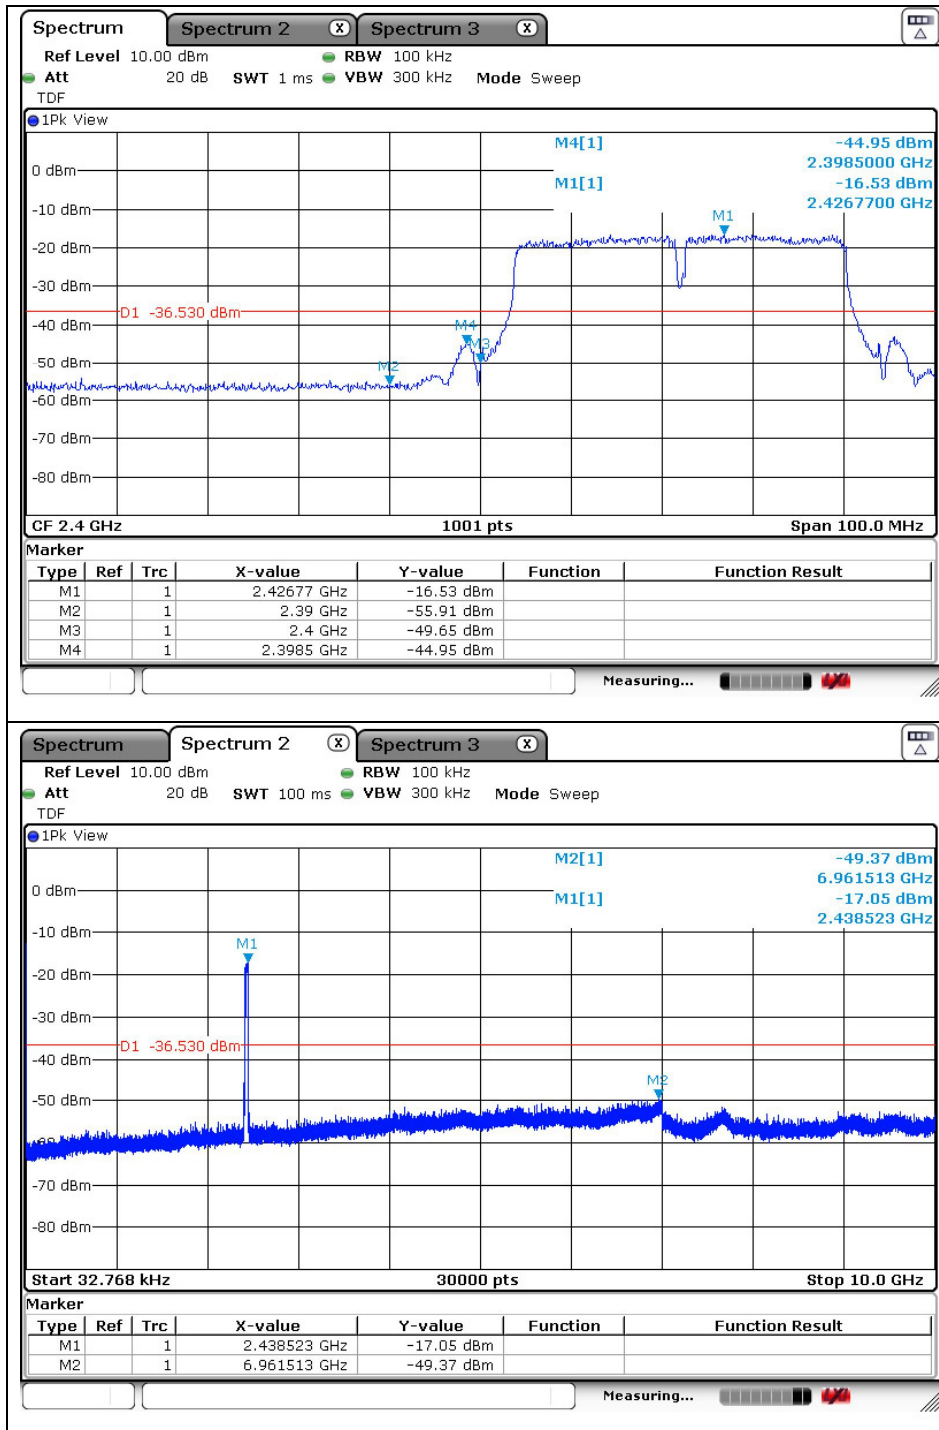

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

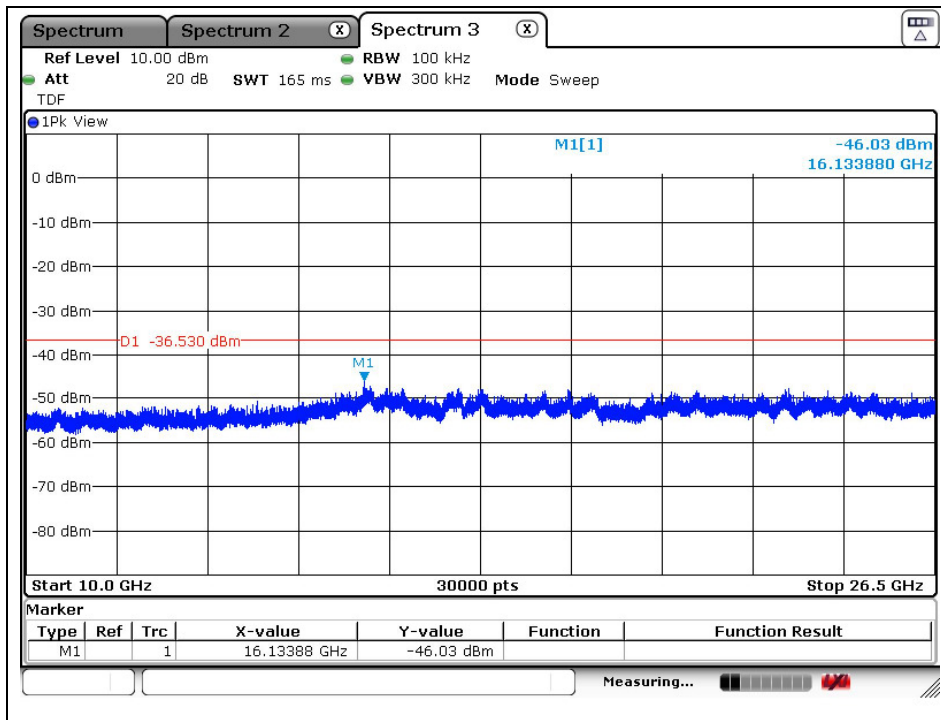


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>



Middle Channel

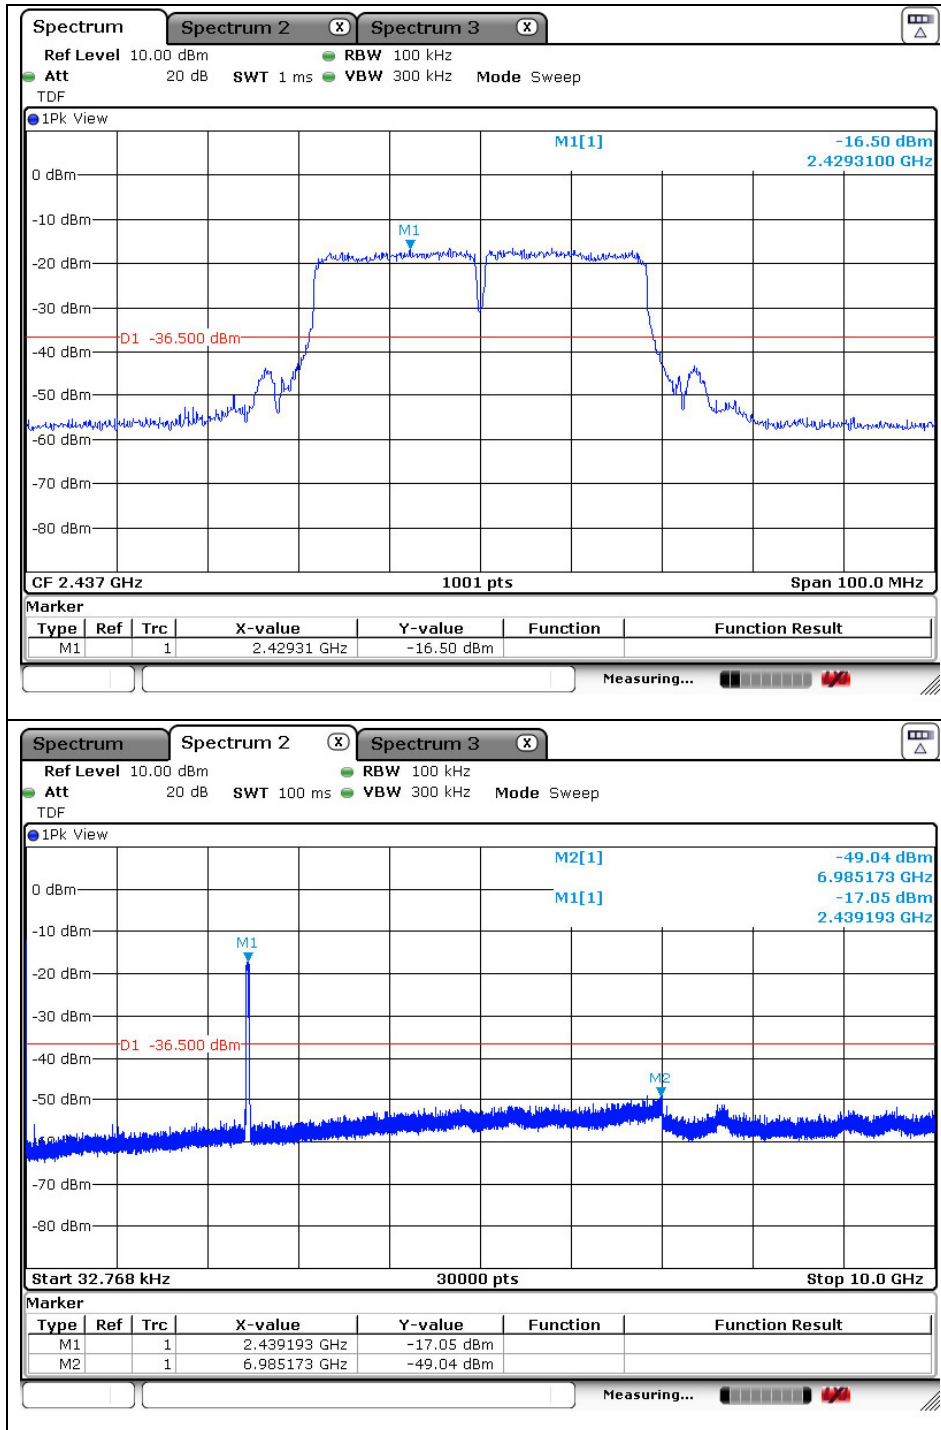


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

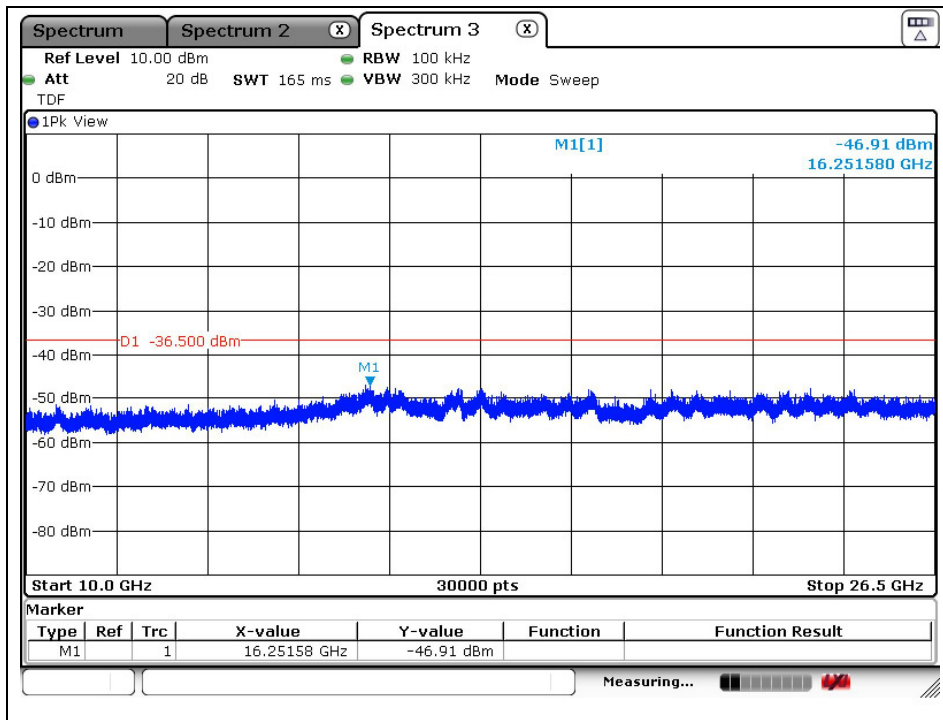


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

High Channel

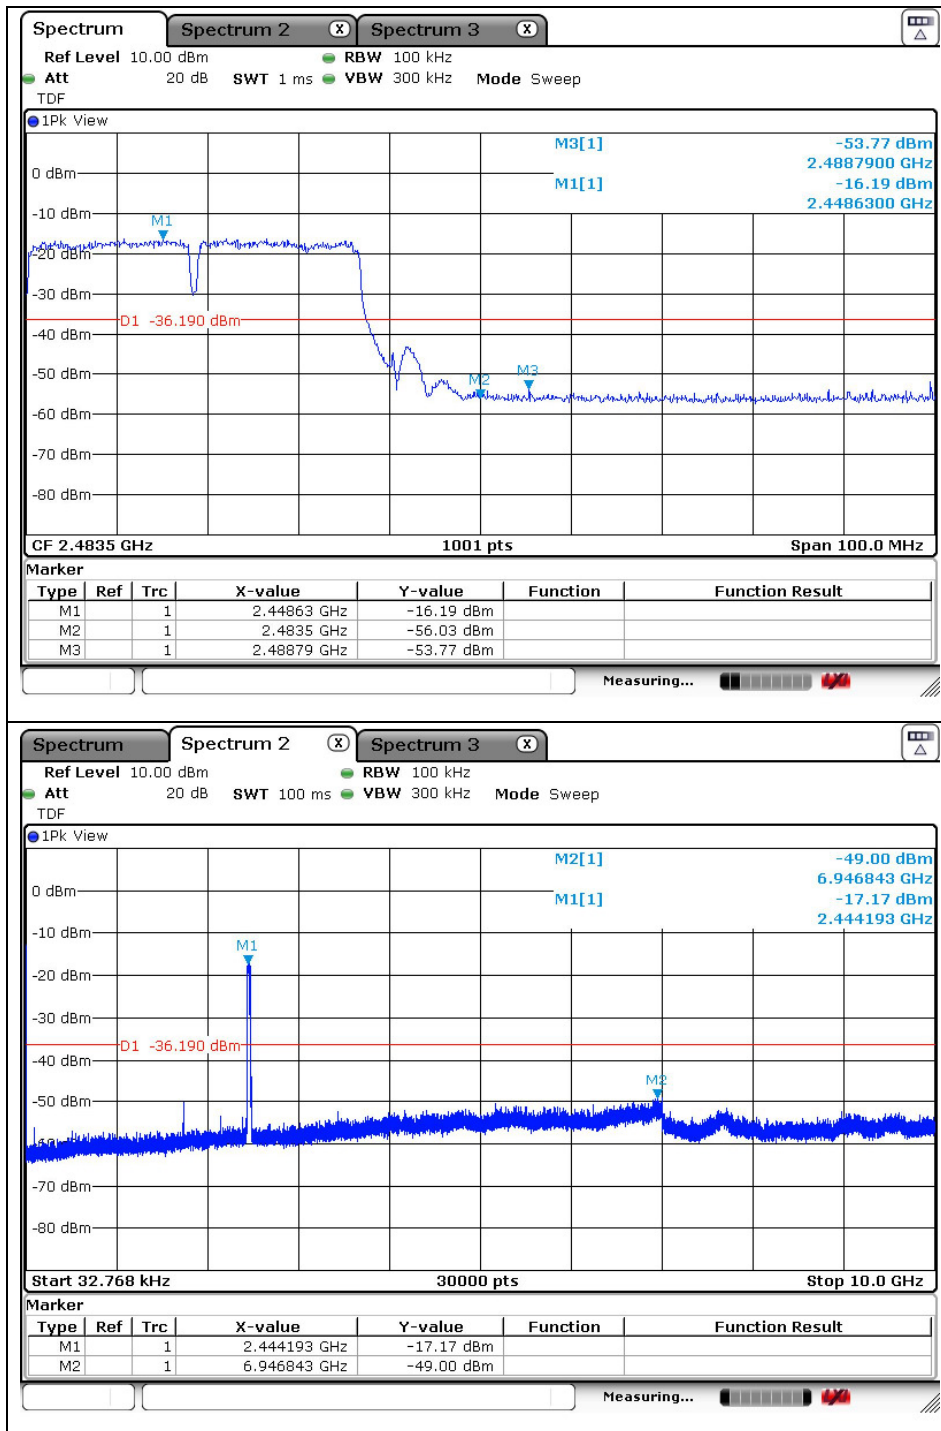

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

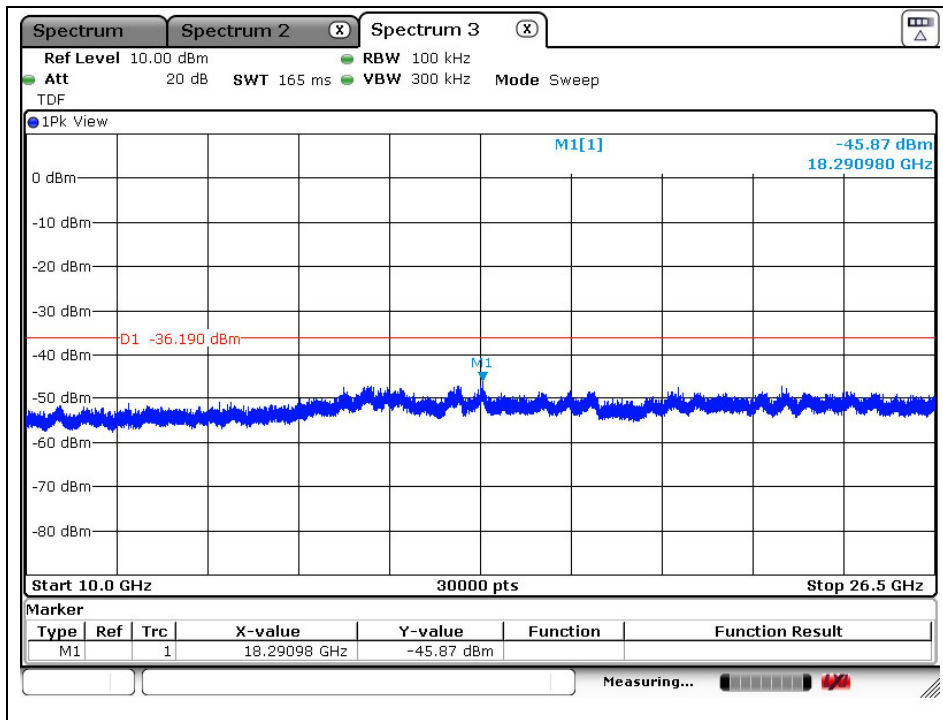


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

### 3. Maximum Conducted Output Power

#### 3.1. Test Setup

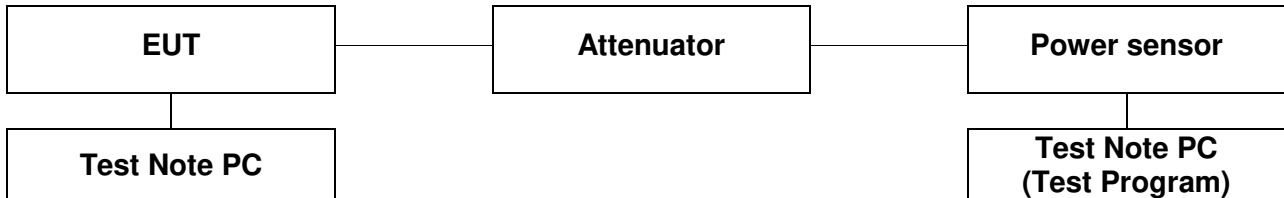

#### 3.2. Limit

According to §15.247(b)(3), for systems using digital modulation in the 902 ~ 928 MHz, 2 400 ~ 2 483.5 MHz, and 5 725 ~ 5 850 MHz band: 1 Watt. As an alternative to a peak power measurement, compliance with the one watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4), the conducted output power limit specified in paragraph(b) of this section is based on the use of antenna with directional gains that do not exceed 6 dBi. Except as shown in paragraph(c) of this section, if transmitting antenna of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.

#### 3.3. Test Procedure

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

The test follows section 9.1.2 of FCC KDB Publication 558074\_v03r03.

##### - Peak power meter method

-The maximum peak conducted output power can be measured using a broad band peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.
3. Test program : (S/W name : R&S Power Viewer, Version : 3.2.0)
4. Measure peak power each channel.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

### 3.4. Test Results

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.

| Mode           | Channel | Channel Frequency (MHz) | Data Rate (Mbps) | Attenuator + Cable offset (dB) | Peak Power Result (dB m) |
|----------------|---------|-------------------------|------------------|--------------------------------|--------------------------|
| DSSS (802.11b) | Low     | 2 412                   | 1                | 11.02                          | 13.12                    |
|                |         |                         | 2                |                                | 13.10                    |
|                |         |                         | 5.5              |                                | 12.69                    |
|                |         |                         | 11               |                                | 12.64                    |
|                | Middle  | 2 437                   | 1                | 11.04                          | 14.10                    |
|                |         |                         | 2                |                                | 13.90                    |
|                |         |                         | 5.5              |                                | 13.81                    |
|                |         |                         | 11               |                                | 13.74                    |
|                | High    | 2 462                   | 1                | 11.04                          | 14.92                    |
|                |         |                         | 2                |                                | 14.85                    |
|                |         |                         | 5.5              |                                | 14.87                    |
|                |         |                         | 11               |                                | 14.91                    |
| OFDM (802.11g) | Low     | 2 412                   | 6                | 11.02                          | 12.21                    |
|                |         |                         | 9                |                                | 11.65                    |
|                |         |                         | 12               |                                | 11.75                    |
|                |         |                         | 18               |                                | 10.07                    |
|                |         |                         | 24               |                                | 11.08                    |
|                |         |                         | 36               |                                | 10.45                    |
|                |         |                         | 48               |                                | 8.99                     |
|                |         |                         | 54               |                                | 9.32                     |
|                | Middle  | 2 437                   | 6                | 11.04                          | 13.11                    |
|                |         |                         | 9                |                                | 12.64                    |
|                |         |                         | 12               |                                | 12.77                    |
|                |         |                         | 18               |                                | 11.03                    |
|                |         |                         | 24               |                                | 12.01                    |
|                |         |                         | 36               |                                | 11.53                    |
|                |         |                         | 48               |                                | 9.90                     |
|                |         |                         | 54               |                                | 10.40                    |
|                | High    | 2 462                   | 6                | 11.04                          | 13.91                    |
|                |         |                         | 9                |                                | 13.61                    |
|                |         |                         | 12               |                                | 13.75                    |
|                |         |                         | 18               |                                | 13.02                    |
|                |         |                         | 24               |                                | 12.96                    |
|                |         |                         | 36               |                                | 12.36                    |
|                |         |                         | 48               |                                | 10.78                    |
|                |         |                         | 54               |                                | 11.35                    |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

| Mode                   | Channel | Channel Frequency (MHz) | Data rate (Mbps) | Attenuator + Cable offset (dB) | Peak Power Result (dB m) |
|------------------------|---------|-------------------------|------------------|--------------------------------|--------------------------|
| OFDM<br>(802.11n_HT20) | Low     | 2 412                   | MCS0             | 11.02                          | 12.62                    |
|                        |         |                         | MCS1             |                                | 11.41                    |
|                        |         |                         | MCS2             |                                | 10.92                    |
|                        |         |                         | MCS3             |                                | 10.47                    |
|                        |         |                         | MCS4             |                                | 10.36                    |
|                        |         |                         | MCS5             |                                | 9.21                     |
|                        |         |                         | MCS6             |                                | 10.20                    |
|                        | Middle  | 2 437                   | MCS0             | 11.04                          | 12.83                    |
|                        |         |                         | MCS1             |                                | 12.56                    |
|                        |         |                         | MCS2             |                                | 12.63                    |
|                        |         |                         | MCS3             |                                | 11.67                    |
|                        |         |                         | MCS4             |                                | 11.26                    |
|                        |         |                         | MCS5             |                                | 10.57                    |
|                        |         |                         | MCS6             |                                | 11.54                    |
|                        | High    | 2 462                   | MCS0             | 11.04                          | 13.61                    |
|                        |         |                         | MCS1             |                                | 13.26                    |
|                        |         |                         | MCS2             |                                | 13.50                    |
|                        |         |                         | MCS3             |                                | 12.16                    |
|                        |         |                         | MCS4             |                                | 12.08                    |
|                        |         |                         | MCS5             |                                | 11.72                    |
|                        |         |                         | MCS6             |                                | 11.55                    |
| MCS7                   | 10.70   |                         |                  |                                |                          |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

| Mode                   | Channel | Channel Frequency (MHz) | Data rate (Mbps) | Attenuator + Cable offset (dB) | Peak Power Result (dB m) |
|------------------------|---------|-------------------------|------------------|--------------------------------|--------------------------|
| OFDM<br>(802.11n_HT40) | Low     | 2 422                   | MCS0             | 11.02                          | 11.64                    |
|                        |         |                         | MCS1             |                                | 11.29                    |
|                        |         |                         | MCS2             |                                | 11.12                    |
|                        |         |                         | MCS3             |                                | 11.26                    |
|                        |         |                         | MCS4             |                                | 10.71                    |
|                        |         |                         | MCS5             |                                | 10.24                    |
|                        |         |                         | MCS6             |                                | 9.17                     |
|                        | Middle  | 2 437                   | MCS7             | 11.04                          | 8.34                     |
|                        |         |                         | MCS0             |                                | 12.28                    |
|                        |         |                         | MCS1             |                                | 12.10                    |
|                        |         |                         | MCS2             |                                | 11.77                    |
|                        |         |                         | MCS3             |                                | 12.02                    |
|                        |         |                         | MCS4             |                                | 11.52                    |
|                        |         |                         | MCS5             |                                | 11.12                    |
|                        | High    | 2 452                   | MCS6             | 11.04                          | 9.69                     |
|                        |         |                         | MCS7             |                                | 9.15                     |
|                        |         |                         | MCS0             |                                | 13.04                    |
|                        |         |                         | MCS1             |                                | 12.60                    |
|                        |         |                         | MCS2             |                                | 12.41                    |
|                        |         |                         | MCS3             |                                | 12.52                    |
|                        |         |                         | MCS4             |                                | 11.92                    |
| MCS5                   | 11.60   |                         |                  |                                |                          |
| MCS6                   | 10.31   |                         |                  |                                |                          |
| MCS7                   | 9.53    |                         |                  |                                |                          |

**Remark:**

Cable offset was compensated in test program (R&S Power Viewer) before measuring.


*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>



## 4. Transmitter AC Power Line Conducted Emission

### 4.1. Test Setup

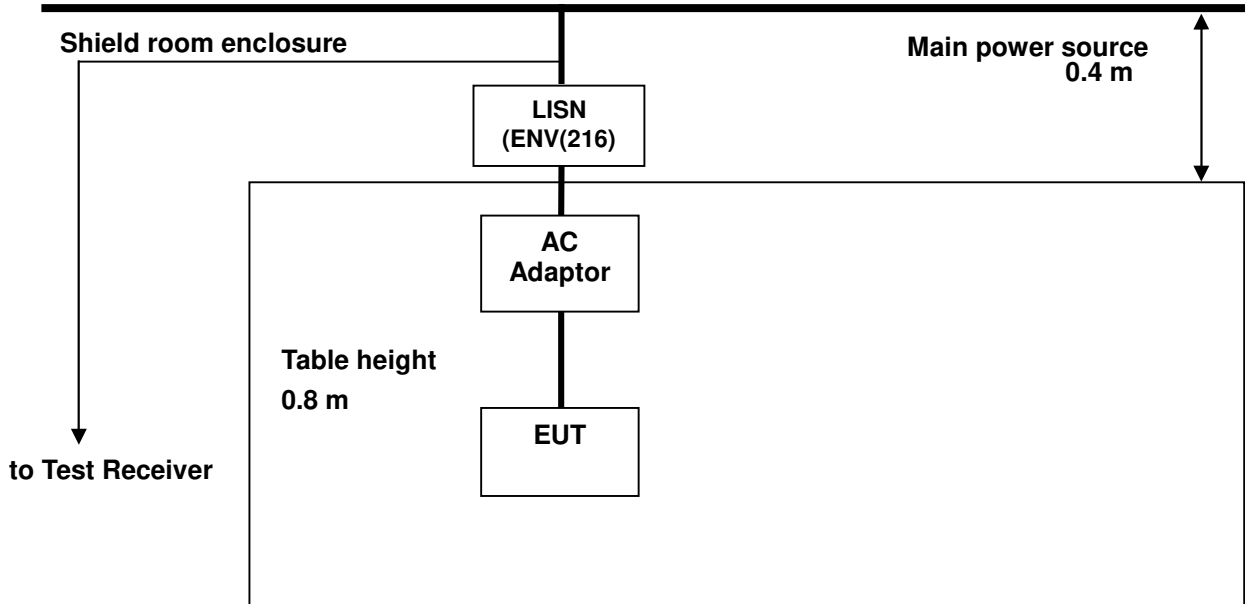

### 4.2. Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H / 50 ohm line impedance stabilization network(LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

| Frequency of Emission (MHz) | Conducted limit (dB $\mu$ V) |          |
|-----------------------------|------------------------------|----------|
|                             | Quasi-peak                   | Average  |
| 0.15 – 0.50                 | 66 - 56*                     | 56 - 46* |
| 0.50 – 5.00                 | 56                           | 46       |
| 5.00 – 30.0                 | 60                           | 50       |

\* Decreases with the logarithm of the frequency.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

---

### 4.3. Test Procedures

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

AC line conducted emissions from the EUT were measured according to the dictates of ANSI C63.10-2009

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. The excess power cable between the EUT and the LISN was bundled. All connecting cables of EUT were moved to find the maximum emission.

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

#### 4.4. Test Results

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line

Ambient temperature : (23 ± 1) °C  
 Relative humidity : 47 % R.H.  
  
 Frequency range : 0.15 MHz – 30 MHz  
 Measured Bandwidth : 9 kHz

| FREQ.<br>(MHz) | LEVEL(dB $\mu$ V) |         | LINE | LIMIT(dB $\mu$ V) |         | MARGIN(dB) |         |
|----------------|-------------------|---------|------|-------------------|---------|------------|---------|
|                | Q-Peak            | Average |      | Q-Peak            | Average | Q-Peak     | Average |
| 0.17           | 48.50             | 36.90   | N    | 64.96             | 54.96   | 16.46      | 18.06   |
| 0.43           | 45.20             | 37.80   | N    | 57.25             | 47.25   | 12.05      | 9.45    |
| 1.33           | 37.70             | 30.00   | N    | 56.00             | 46.00   | 18.30      | 16.00   |
| 2.80           | 34.40             | 26.70   | N    | 56.00             | 46.00   | 21.60      | 19.30   |
| 13.74          | 38.60             | 30.20   | N    | 60.00             | 50.00   | 21.40      | 19.80   |
| 23.14          | 32.10             | 21.30   | N    | 60.00             | 50.00   | 27.90      | 28.70   |
| 0.17           | 50.90             | 38.70   | H    | 64.96             | 54.96   | 14.06      | 16.26   |
| 0.30           | 48.00             | 38.00   | H    | 60.24             | 50.24   | 12.24      | 12.24   |
| 0.47           | 46.00             | 38.20   | H    | 56.51             | 46.51   | 10.51      | 8.31    |
| 1.76           | 42.90             | 34.10   | H    | 56.00             | 46.00   | 13.10      | 11.90   |
| 13.27          | 42.50             | 33.30   | H    | 60.00             | 50.00   | 17.50      | 16.70   |
| 23.86          | 42.00             | 25.00   | H    | 60.00             | 50.00   | 18.00      | 25.00   |

Remark;


- Line ( H ): Hot, Line ( N ): Neutral
- All modes of operation were investigated and the worst-case emissions were reported using 11b Mode, 1 Mbps, Middle channel.
- Traces shown in plot mad using a peak detector and average detector
- The limit for Class B device(s) from 150 kHz to 30 MHz are specified in Section of the Title 47 CFR.
- Deviations to the Specifications: None.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*


**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

## Plots of Conducted Power line

Test mode: (Neutral)

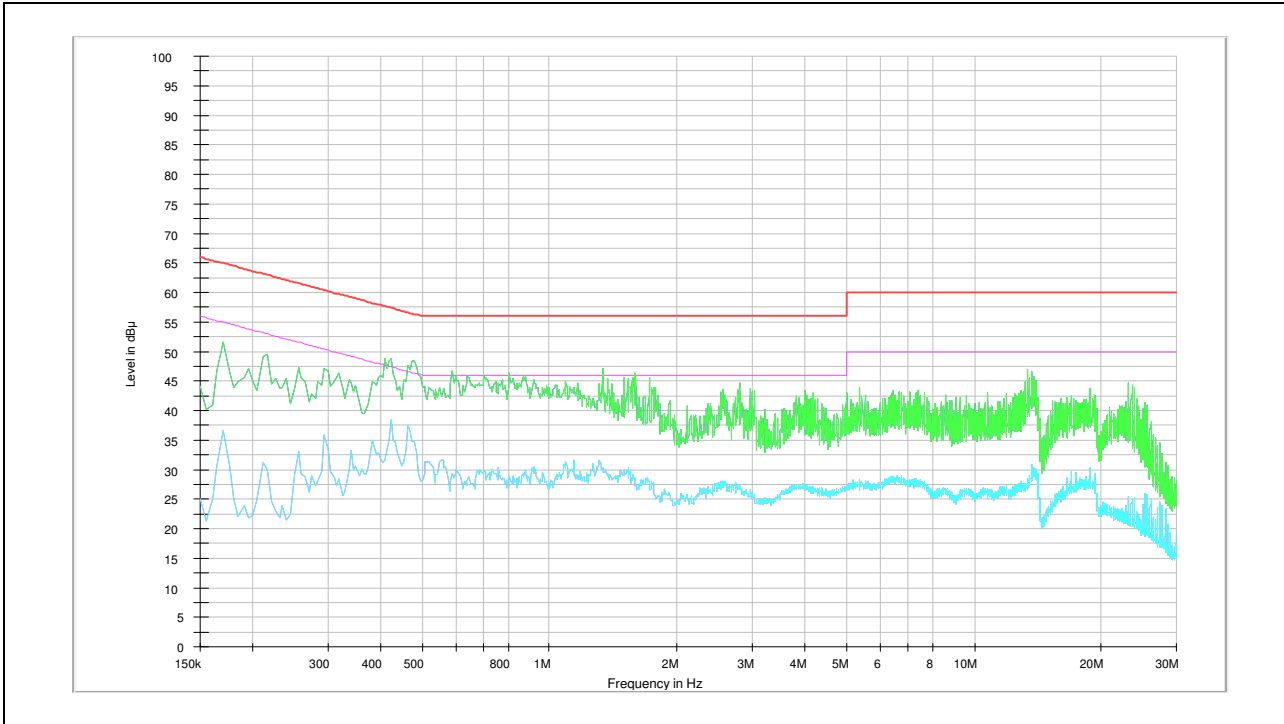

Test mode: (Hot)

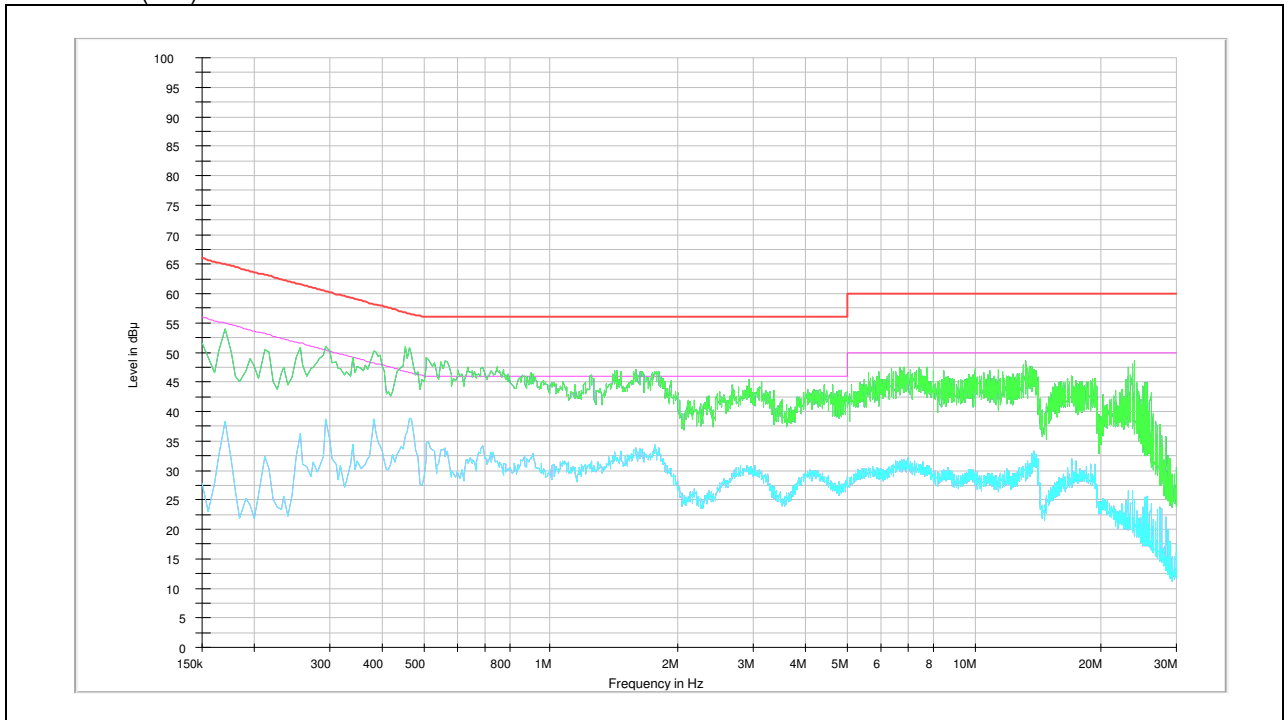

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.