



# FCC TEST REPORT

## FCC ID:2AF54-NANOL1

**Report Number**..... : **ZKT-2312019373E-3**

Date of Test..... Dec. 18, 2023 to Dec. 26, 2023

Date of issue..... : Dec. 26, 2023

Total number of pages..... 95

Test Result ..... : PASS

**Testing Laboratory**..... : **Shenzhen ZKT Technology Co., Ltd.**

Address ..... : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

**Applicant's name** ..... : **FY International LLC**

Address ..... : 13 Garabedian Dr, Unit C, Salem NH 03079

**Manufacturer's name** ..... : **FY International LLC**

Address ..... : 13 Garabedian Dr, Unit C, Salem NH 03079

Test specification:

Standard..... : FCC CFR Title 47 Part 15 Subpart E Section 15.407  
ANSI C63.10:2013  
KDB 789033 D02 v02r01

Test procedure..... : /

Non-standard test method ..... : N/A

**Test Report Form No**..... : /

**Test Report Form(s) Originator**..... : ZKT Testing

**Master TRF** ..... : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

**Product name**..... : **CyberGeek Nano L1 Mini PC**

Trademark ..... : CyberGeek

Model/Type reference..... : Nano L1

Nano L2, Nano L3, Nano L4, Nano R4, Nano R5, Nano R6, Nano P1, Nano P2, Nano P3

Input: 19V 3420mA

Ratings..... : AC/DC Adapter Input: 100-240V ~ 50/60Hz, 1.5A

Output: 19V 3420mA



Testing procedure and testing location:

Testing Laboratory.....: **Shenzhen ZKT Technology Co., Ltd.**

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Tested by (name + signature).....: Jim Liu

Reviewer (name + signature).....: Jackson Fang

Approved (name + signature).....: Lake Xie





Table of Contents

Page

<b>1. VERSION .....</b>	<b>5</b>
<b>2.SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
2.1 TEST FACILITY .....	7
2.2 MEASUREMENT UNCERTAINTY .....	7
<b>3. GENERAL INFORMATION .....</b>	<b>8</b>
3.1 GENERAL DESCRIPTION OF EUT .....	8
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED .....	11
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) .....	11
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS .....	12
<b>4.EMC EMISSION TEST .....</b>	<b>14</b>
4.1 CONDUCTED EMISSION MEASUREMENT .....	14
4.1.1 POWER LINE CONDUCTED EMISSION Limits .....	14
4.1.2 TEST PROCEDURE .....	14
4.1.3 DEVIATION FROM TEST STANDARD .....	14
4.1.4 TEST SETUP .....	15
4.1.5 EUT OPERATING CONDITIONS .....	15
4.1.6 TEST RESULT .....	16
4.2 RADIATED EMISSION MEASUREMENT .....	20
4.2.1 APPLICABLE STANDARD .....	20
4.2.2 CONFORMANCE LIMIT .....	20
4.2.3 MEASURING INSTRUMENTS .....	20
4.2.4 TEST CONFIGURATION .....	21
4.2.5 TEST PROCEDURE .....	22
4.2.6 TEST RESULT .....	23
<b>5.POWER SPECTRAL DENSITY TEST .....</b>	<b>39</b>
5.1 APPLIED PROCEDURES / LIMIT .....	39
5.2 TEST PROCEDURE .....	40
5.3 DEVIATION FROM STANDARD .....	40
5.4 TEST SETUP .....	40
5.5 EUT OPERATION CONDITIONS .....	40
5.6 TEST RESULTS .....	41
<b>6. 26DB EMISSION BANDWIDTH &amp; 6DB OCCUPIED BANDWIDTH .....</b>	<b>49</b>
6.1 APPLIED PROCEDURES / LIMIT .....	49
6.2 TEST PROCEDURE .....	49
6.3 EUT OPERATION CONDITIONS .....	49
6.4 TEST RESULTS .....	50



Table of Contents	Page
<b>7. MAXIMUM CONDUCTED OUTPUT POWER</b> .....	<b>58</b>
7.1 APPLIED PROCEDURES / LIMIT .....	58
7.2 TEST PROCEDURE .....	58
7.3 DEVIATION FROM STANDARD .....	59
7.4 TEST SETUP .....	59
7.5 EUT OPERATION CONDITIONS .....	59
7.6 TEST RESULTS .....	60
<b>8. OUT OF BAND EMISSIONS</b> .....	<b>62</b>
8.1 APPLICABLE STANDARD .....	62
8.2 TEST PROCEDURE .....	62
8.3 DEVIATION FROM STANDARD .....	62
8.4 TEST SETUP .....	62
8.5 EUT OPERATION CONDITIONS .....	62
8.6 TEST RESULTS .....	63
<b>9. SPURIOUS RF CONDUCTED EMISSIONS</b> .....	<b>66</b>
9.1 CONFORMANCE LIMIT .....	67
9.2 MEASURING INSTRUMENTS .....	67
9.3 TEST SETUP .....	67
9.4 TEST PROCEDURE .....	67
9.5 TEST RESULTS .....	67
<b>10. Frequency Stability Measurement</b> .....	<b>74</b>
10.1 LIMIT .....	74
10.2 TEST PROCEDURES .....	74
10.3 TEST SETUP LAYOUT .....	74
10.4 EUT OPERATION DURING TEST .....	74
10.5 TEST RESULTS .....	74
<b>11. DUTY CYCLE</b> .....	<b>85</b>
11.1 APPLIED PROCEDURES / LIMIT .....	85
11.2 DEVIATION FROM STANDARD .....	85
11.3 TEST SETUP .....	85
<b>12. ANTENNA REQUIREMENT</b> .....	<b>94</b>
<b>13. TEST SETUP PHOTO</b> .....	<b>95</b>
<b>14. EUT CONSTRUCTIONAL DETAILS</b> .....	<b>95</b>



**1. VERSION**

Report No.	Version	Description	Approved
ZKT-2312019373E-3	Rev.01	Initial issue of report	Dec. 26, 2023



## 2.SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emission	PASS	
789033 D02 General U-NII	Duty Cycle	PASS	
15.209(a) 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(8)	Spurious Radiated Emissions	PASS	
15.407 (a)(12) 15.407(e)	26dB Emission Bandwidth & 6dB Occupied Bandwidth	PASS	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
2.1051, 15.407(b)(1) 15.407(b)(4)	Band Edge	PASS	
15.407 (a)(1) 15.407 (a)(3)	Power Spectral Density	PASS	
2.1051, 15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



## 2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.  
Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225  
Designation Number: CN1299  
IC Registered No.: 27033  
CAB identifier: CN0110

## 2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$  · where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of  $k=2$  · providing a level of confidence of approximately 95 % ·

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8MHz
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59°C



### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Product Name:	CyberGeek Nano L1 Mini PC	
Model No.:	Nano L1	
Serial Model:	Nano L2, Nano L3, Nano L4, Nano R4, Nano R5, Nano R6, Nano P1, Nano P2, Nano P3	
Model Different.:	All the model are the same circuit and RF module, only the model name is different.	
Sample ID	ZKT-2312019373E-4	
Sample(s) Status:	Engineer sample	
Product Description	IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11a/n/ac (20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac/n (40MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac (80MHz channel bandwidth)
	Data Rate	802.11a 802.11n(HT20/HT40):MCS0-MCS7; 802.11ac(VHT20/VHT40/VHT80):MCS0-MCS9
	Modulation	OFDM with BPSK / QPSK / 16-QAM / 64-QAM for 802.11a/n; OFDM with BPSK / QPSK / 16-QAM / 64-QAM / 256-QAM for 802.11ac;
	Operating Frequency Range	<input checked="" type="checkbox"/> 5180-5240MHz for 802.11a/n20/ac20; <input checked="" type="checkbox"/> 5190-5230MHz for 802.11ac40/n40; <input checked="" type="checkbox"/> 5210MHz for 802.11 ac80. <input checked="" type="checkbox"/> 5745-5825 MHz for 802.11a/n20/ac20; <input checked="" type="checkbox"/> 5755-5795 MHz for 802.11ac40/n40; <input checked="" type="checkbox"/> 5775MHz for 802.11 ac80.
	Number of Channels	<input checked="" type="checkbox"/> 4 channels for 802.11a/n20/ac20 in the 5180-5240MHz band ; <input checked="" type="checkbox"/> 2 channels for 802.11 ac40/n40 in the 5190-5230 MHz band ; <input checked="" type="checkbox"/> 1 channels for 802.11 ac80 in the 5210MHz band. <input checked="" type="checkbox"/> 5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band ; <input checked="" type="checkbox"/> 2 channels for 802.11 ac40/n40 in the 5755-5795 MHz band ; <input checked="" type="checkbox"/> 1 channels for 802.11 ac80 in the 5775MHz band
Channel List	Please refer to the Note 2.	
Antenna Type:	FPC Antenna1	
Antenna gain:	5.2G: 3.79dBi 5.8G: 3.50dBi	
Power supply:	Input: 19V  3420mA	
AC/DC Adapter:	Input: 100-240V ~ 50/60Hz, 1.5A Output: 19V  3420mA	
AC/DC Adapter Mode:	JHD-AP065U-190342BA-A	

**Note:**

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.





802.11a/n/ac( 20MHz) Frequency Channel for 5.2G							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5200	40	5220	48	5240

802.11n/ac(40MHz) Frequency Channel for 5.2G							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230	-	-	-	-

802.11ac (80MHz) Frequency Channel for 5.2G	
Channel	Frequency (MHz)
42	5210

802.11a/n/ac( 20 MHz) Frequency Channel for 5.8G							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

802.11n/ac(40MHz) Frequency Channel for 5.8G					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

802.11ac (80MHz) Frequency Channel for 5.8G	
Channel	Frequency (MHz)
155	5775



## 3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	REALTEK 11ac 8821AU
Power level setup	Default

Pretest Mode	Description
Mode 1	802.11a/n20/ac20 CH 36/ CH 40/ CH 48 for 5.2G 802.11a/n20/ac20 CH149/ CH157/ CH 165 for 5.8G
Mode 2	802.11n 40/ac 40 CH38/ CH 46 for 5.2G 802.11n 40/ac 40 CH 151 / CH 159 for 5.8G
Mode 3	802.11 ac80 CH 42 for 5.2G 802.11 ac80 CH 155 for 5.8G

For Conducted Emission	
Final Test Mode	Description
Mode 1	802.11a/n20/ac20 CH 36/ CH 40/ CH 48 for 5.2G 802.11a/n20/ac20 CH149/ CH157/ CH 165 for 5.8G
Mode 2	802.11n 40/ac 40 CH38/ CH 46 for 5.2G 802.11n 40/ac 40 CH 151 / CH 159 for 5.8G
Mode 3	802.11 ac80 CH 42 for 5.2G 802.11 ac80 CH 155 for 5.8G

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a/n20/ac20 CH 36/ CH 40/ CH 48 for 5.2G 802.11a/n20/ac20 CH149/ CH157/ CH 165 for 5.8G
Mode 2	802.11n 40/ac 40 CH38/ CH 46 for 5.2G 802.11n 40/ac 40 CH 151 / CH 159 for 5.8G
Mode 3	802.11 ac80 CH 42 for 5.2G 802.11 ac80 CH 155 for 5.8G

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.




### 3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission



Radiated Emission



Conducted Spurious



### 3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	CyberGeek Nano L1 Mini PC	CyberGeek	Nano L1	See page 8	EUT
A1	AC/DC Adapter	LANIX	JHD-AP065U-1903 42BA-A	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



## 3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

## Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Nov. 14, 2023	Nov. 13, 2024
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Nov. 02, 2023	Nov. 01, 2024
3	Test Cable	N/A	C-01	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
4	Test Cable	N/A	C-02	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
5	Test Cable	N/A	C-03	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
6	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Nov. 02, 2023	Nov. 01, 2024
7	Triple-Loop Antenna	N/A	RF300	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
8	Absorbing Clamp	DZ	ZN23201	15034	N/A	Nov. 07, 2023	Nov. 06, 2024
9	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\

## Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	A.17.05	Nov. 02, 2023	Nov. 01, 2024
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Nov. 02, 2023	Nov. 01, 2024
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	4.32	Nov. 02, 2023	Nov. 01, 2024
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	N/A	Nov. 13, 2023	Nov. 12, 2024
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Nov. 13, 2023	Nov. 12, 2024
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Nov. 13, 2023	Nov. 12, 2024
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Nov. 16, 2023	Nov. 15, 2024
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	060747	N/A	Nov. 02, 2023	Nov. 01, 2024
9	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	N/A	Nov. 02, 2023	Nov. 01, 2024
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Nov. 02, 2023	Nov. 01, 2024
11	Test Cable	N/A	R-01	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
12	Test Cable	N/A	R-02	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
13	Test Cable	N/A	R-03	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
14	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	\	\
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
16	Turntable	MF	MF-7802BS	N/A	N/A	\	\
17	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\



## RF Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	A.17.05	Nov. 02, 2023	Nov. 01, 2024
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Nov. 02, 2023	Nov. 01, 2024
3	Test Cable	N/A	RF-01	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
4	Test Cable	N/A	RF-02	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
5	Test Cable	N/A	RF-03	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
6	ESG Signal Generator	Agilent	E4421B	N/A	B.03.84	Nov. 02, 2023	Nov. 01, 2024
7	Signal Generator	Agilent	N5182A	N/A	A.01.87	Nov. 02, 2023	Nov. 01, 2024
8	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	N/A	Nov. 16, 2023	Nov. 15, 2024
9	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Nov. 02, 2023	Nov. 01, 2024
10	MWRF Power Meter Test system	MW	MW100-RF CB	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
11	Power Meter	KEYSIGHT	N1912A P	N/A	A.05.00	Nov. 02, 2023	Nov. 01, 2024
12	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	\	\
13	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\



## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

#### 4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) \*Decreases with the logarithm of the frequency.

#### 4.1.2 TEST PROCEDURE


- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation



#### 4.1.4 TEST SETUP

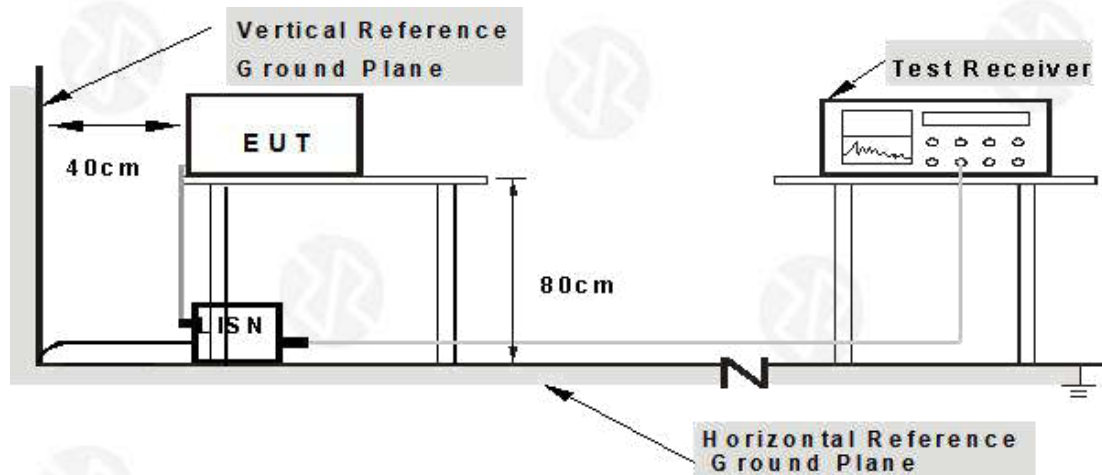

- Note:**
- 1.Support units were connected to second LISN.
  - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 TEST RESULT

5.2G:

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	L
Test Voltage:	AC 120V/60Hz	Test Mode:	802.11n20 - 5180MHz

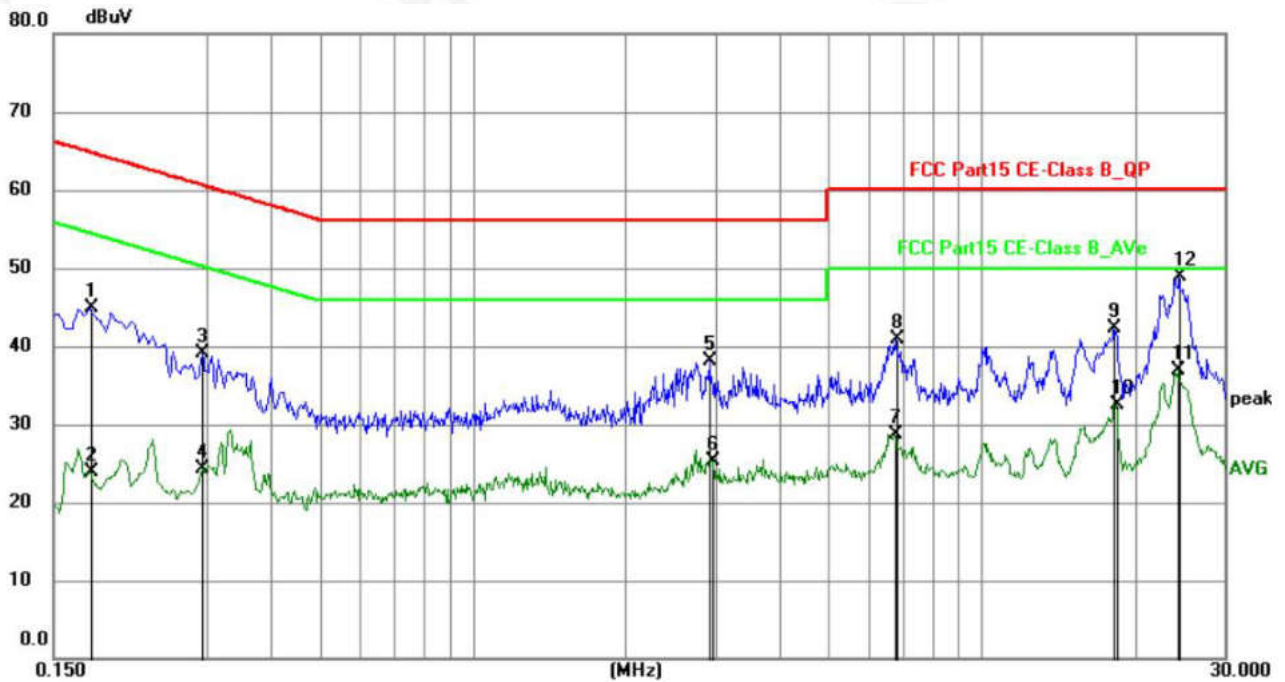


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1768	23.88	20.96	44.84	64.63	-19.79	QP	P	
2	0.1768	2.92	20.96	23.88	54.63	-30.75	AVG	P	
3	0.2938	18.12	21.00	39.12	60.42	-21.30	QP	P	
4	0.2938	3.38	21.00	24.38	50.42	-26.04	AVG	P	
5	2.9219	17.02	21.05	38.07	56.00	-17.93	QP	P	
6	2.9489	4.34	21.05	25.39	46.00	-20.61	AVG	P	
7	6.7335	7.32	21.39	28.71	50.00	-21.29	AVG	P	
8	6.7785	19.53	21.40	40.93	60.00	-19.07	QP	P	
9	18.2040	18.94	23.41	42.35	60.00	-17.65	QP	P	
10	18.3658	9.05	23.43	32.48	50.00	-17.52	AVG	P	
11	24.2880	12.47	24.40	36.87	50.00	-13.13	AVG	P	
12	24.5040	24.47	24.43	48.90	60.00	-11.10	QP	P	





Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	N
Test Voltage:	AC 120V/60Hz	Test Mode:	802.11n20 - 5180MHz

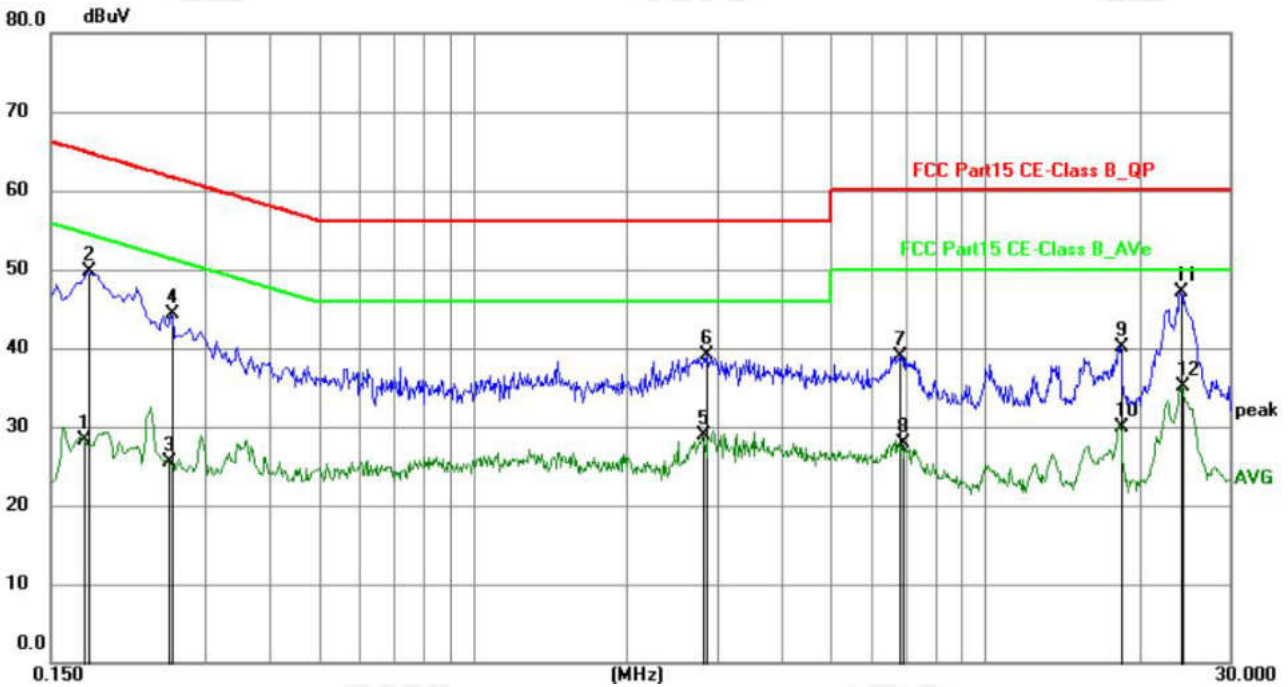

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1748	7.33	20.92	28.25	54.73	-26.48	AVG	P	
2	0.1768	28.71	20.93	49.64	64.63	-14.99	QP	P	
3	0.2560	4.45	20.98	25.43	51.56	-26.13	AVG	P	
4	0.2580	23.28	20.98	44.26	61.50	-17.24	QP	P	
5	2.8184	7.74	21.08	28.82	46.00	-17.18	AVG	P	
6	2.8635	18.08	21.08	39.16	56.00	-16.84	QP	P	
7	6.8144	17.45	21.53	38.98	60.00	-21.02	QP	P	
8	6.9134	6.30	21.55	27.85	50.00	-22.15	AVG	P	
9	18.3300	16.65	23.49	40.14	60.00	-19.86	QP	P	
10	18.3300	6.46	23.49	29.95	50.00	-20.05	AVG	P	
11	24.0672	22.75	24.41	47.16	60.00	-12.84	QP	P	
12	24.2472	10.64	24.43	35.07	50.00	-14.93	AVG	P	


Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case 802.11n20 - 5180MHz.



5.8G:


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	L
Test Voltage:	AC 120V/60Hz	Test Mode:	802.11n20 - 5745MHz

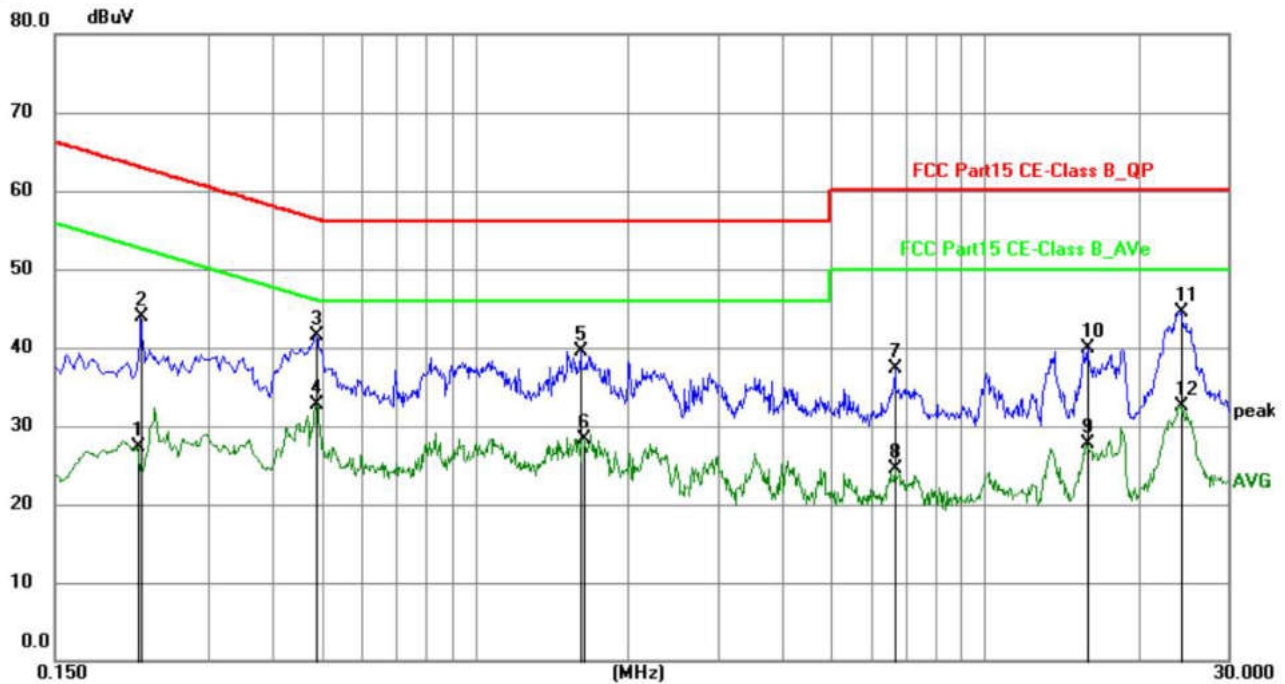

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2174	6.28	21.03	27.31	52.92	-25.61	AVG	P	
2	0.2220	22.92	21.02	43.94	62.74	-18.80	QP	P	
3	0.4873	20.64	20.84	41.48	56.21	-14.73	QP	P	
4	0.4873	11.94	20.84	32.78	46.21	-13.43	AVG	P	
5	1.6169	18.59	21.00	39.59	56.00	-16.41	QP	P	
6	1.6348	7.39	21.00	28.39	46.00	-17.61	AVG	P	
7	6.6974	15.93	21.39	37.32	60.00	-22.68	QP	P	
8	6.6974	3.11	21.39	24.50	50.00	-25.50	AVG	P	
9	15.8460	4.74	23.01	27.75	50.00	-22.25	AVG	P	
10	15.9495	16.79	23.03	39.82	60.00	-20.18	QP	P	
11	24.3283	20.14	24.41	44.55	60.00	-15.45	QP	P	
12	24.3283	8.11	24.41	32.52	50.00	-17.48	AVG	P	



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	N
Test Voltage:	AC 120V/60Hz	Test Mode:	802.11n20 - 5745MHz

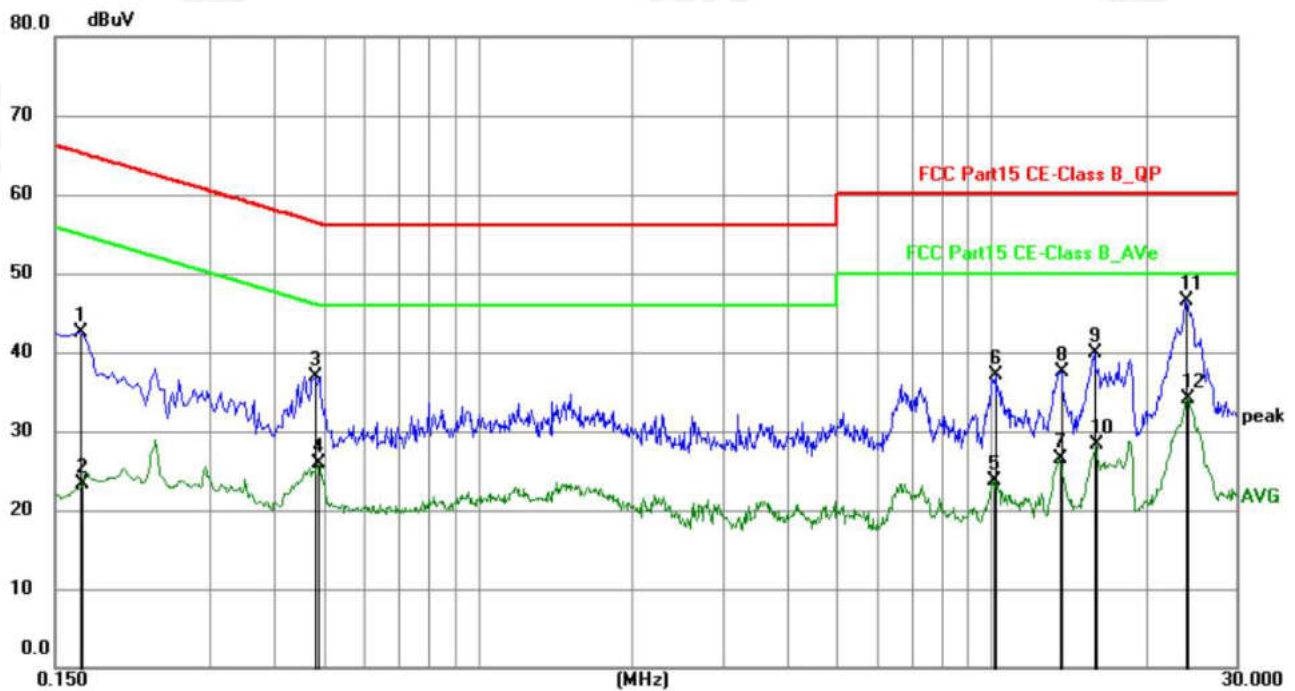

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1680	21.63	20.90	42.53	65.06	-22.53	QP	P	
2	0.1693	2.49	20.91	23.40	54.99	-31.59	AVG	P	
3	0.4828	16.01	20.86	36.87	56.29	-19.42	QP	P	
4	0.4873	4.98	20.86	25.84	46.21	-20.37	AVG	P	
5	10.1038	1.60	22.07	23.67	50.00	-26.33	AVG	P	
6	10.1983	14.96	22.08	37.04	60.00	-22.96	QP	P	
7	13.5778	3.79	22.66	26.45	50.00	-23.55	AVG	P	
8	13.6859	14.92	22.68	37.60	60.00	-22.40	QP	P	
9	15.9178	16.81	23.07	39.88	60.00	-20.12	QP	P	
10	15.9763	5.27	23.08	28.35	50.00	-21.65	AVG	P	
11	24.0000	22.01	24.40	46.41	60.00	-13.59	QP	P	
12	24.0853	9.74	24.41	34.15	50.00	-15.85	AVG	P	

**Notes:**

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor
- 4.The test data shows only the worst case 802.11n20 - 5745MHz.



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

### 4.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

- Remark : 1. Emission level in dBuV/m=20 log (uV/m)  
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.  
 3. Distance extrapolation factor =40log(Specific distance/ test distance)( dB);  
 Limit line=Specific limits(dBuV) + distance extrapolation factor.


### 4.2.3 MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.




#### 4.2.4 TEST CONFIGURATION


##### 1. For radiated emissions below 30MHz

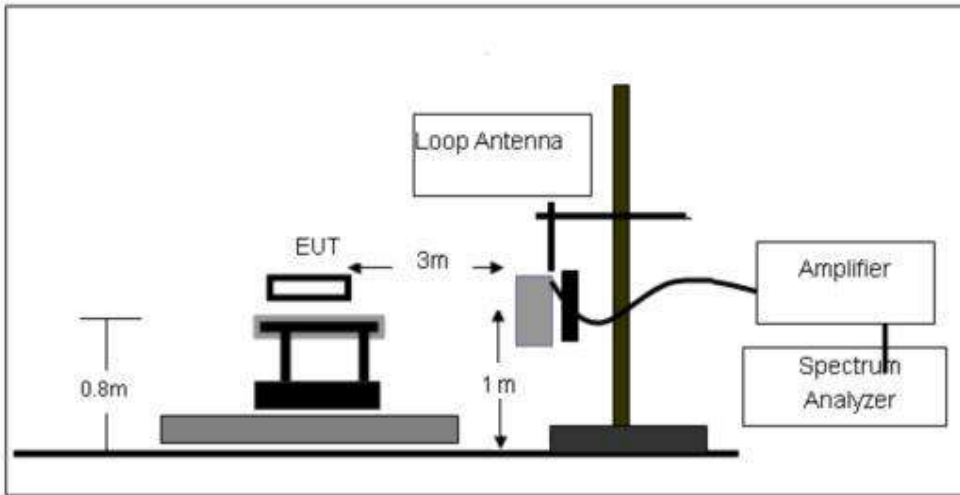

##### 2. For radiated emissions from 30MHz to 1000MHz

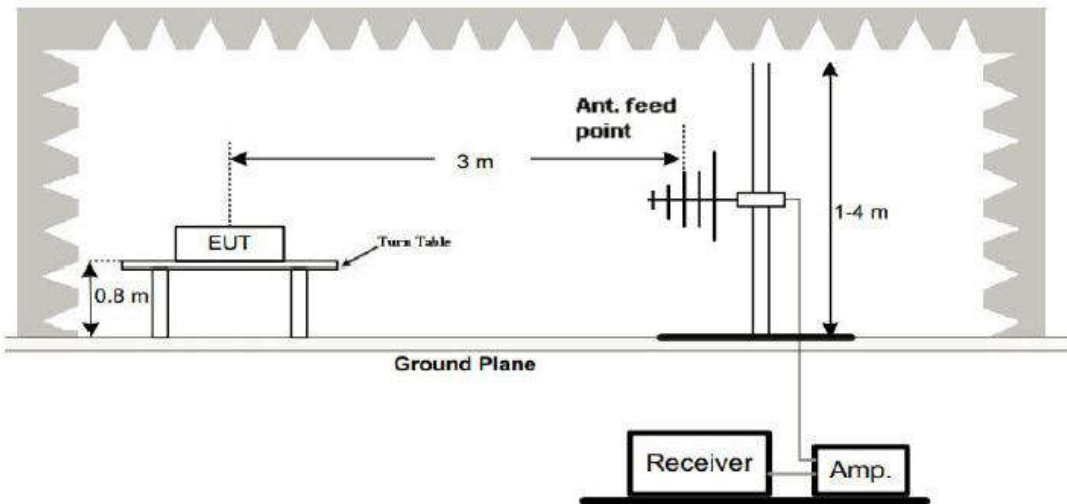

##### 3. Radiated Emission Test-Up Frequency Above 1GHz

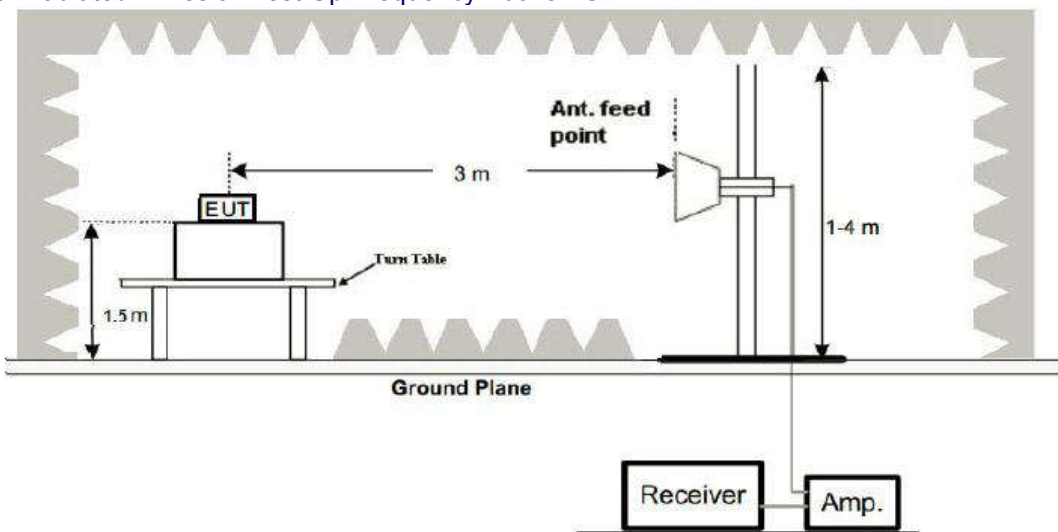



#### 4.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item – EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$ , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.



#### 4.2.6 TEST RESULT


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz

#### 5.2G:


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 19V	Test Mode :	TX 802.11n20 - 5180MHz

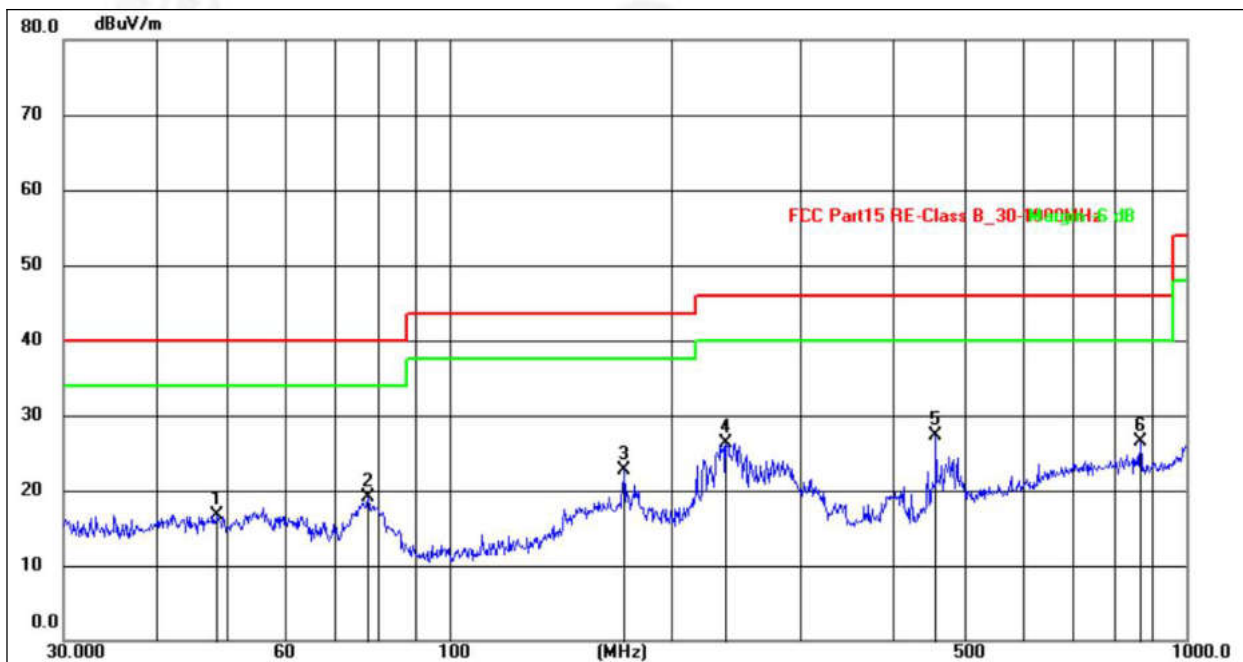

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	48.5015	30.85	-14.05	16.80	40.00	-23.20	QP
2	77.5926	37.88	-18.85	19.03	40.00	-20.97	QP
3	172.5987	39.91	-17.23	22.68	43.50	-20.82	QP
4	237.4756	42.81	-16.46	26.35	46.00	-19.65	QP
5	457.5072	40.96	-13.72	27.24	46.00	-18.76	QP
6	866.0878	33.42	-6.97	26.45	46.00	-19.55	QP



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 19V	Test Mode :	TX 802.11n20 - 5180MHz

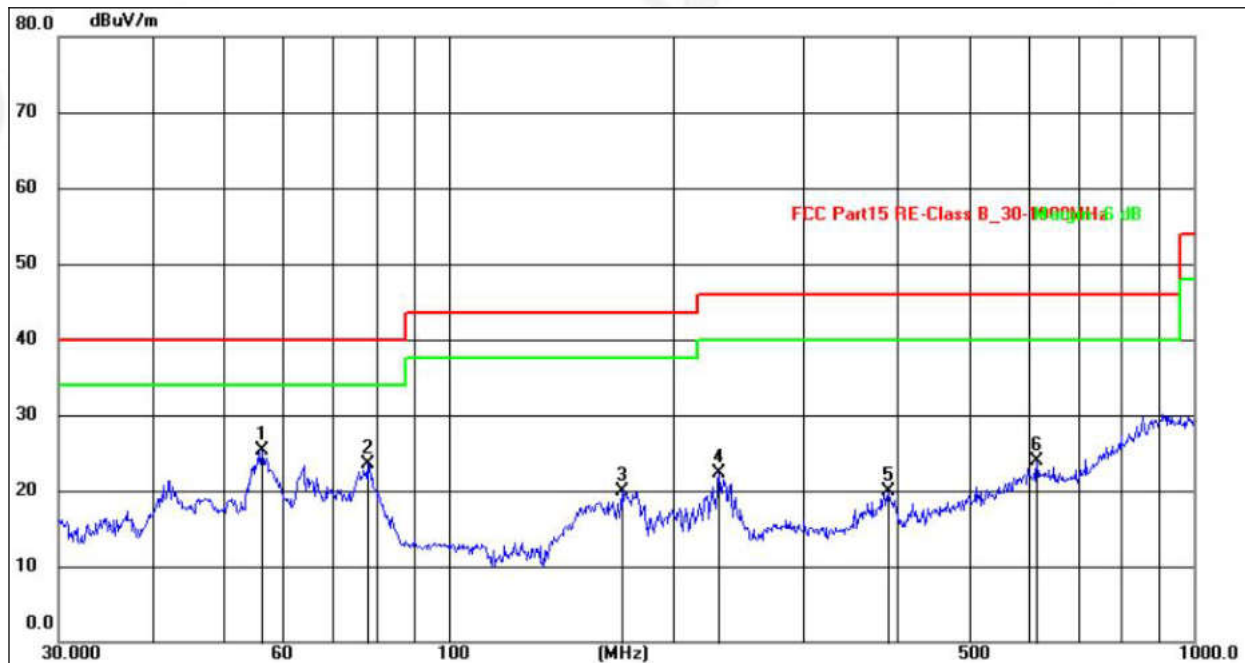

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	56.1974	43.25	-17.92	25.33	40.00	-14.67	QP
2	77.8653	44.89	-21.33	23.56	40.00	-16.44	QP
3	170.7923	39.86	-20.01	19.85	43.50	-23.65	QP
4	230.9067	42.60	-20.33	22.27	46.00	-23.73	QP
5	389.3548	35.26	-15.38	19.88	46.00	-26.12	QP
6	616.3716	31.67	-7.75	23.92	46.00	-22.08	QP

## Remarks:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. All modes were tested, and only the worst test data was recorded is 802.11n20 - 5180MHz.





5.8G:


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 19V	Test Mode :	TX 802.11n20 - 5745MHz

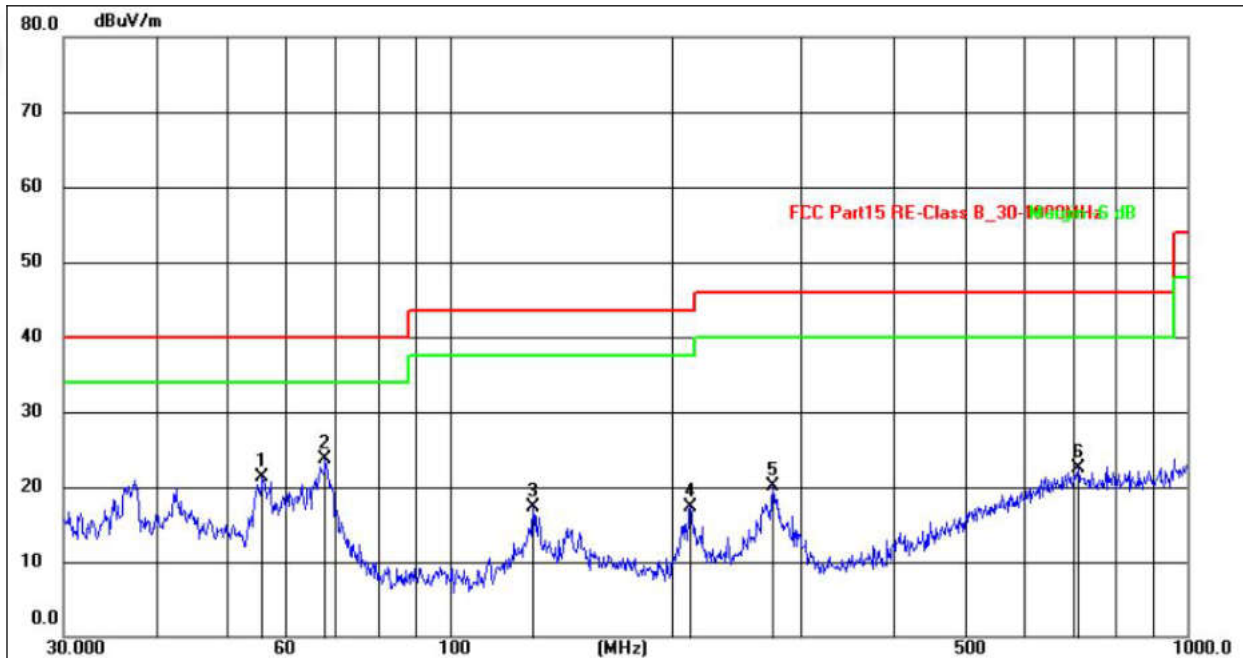

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	55.8047	35.38	-14.16	21.22	40.00	-18.78	QP
2	67.9128	39.99	-16.34	23.65	40.00	-16.35	QP
3	129.9225	35.02	-17.76	17.26	43.50	-26.24	QP
4	212.2694	35.42	-18.17	17.25	43.50	-26.25	QP
5	274.1938	34.83	-14.69	20.14	46.00	-25.86	QP
6	711.6734	29.18	-6.73	22.45	46.00	-23.55	QP



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 19V	Test Mode :	TX 802.11n20 - 5745MHz

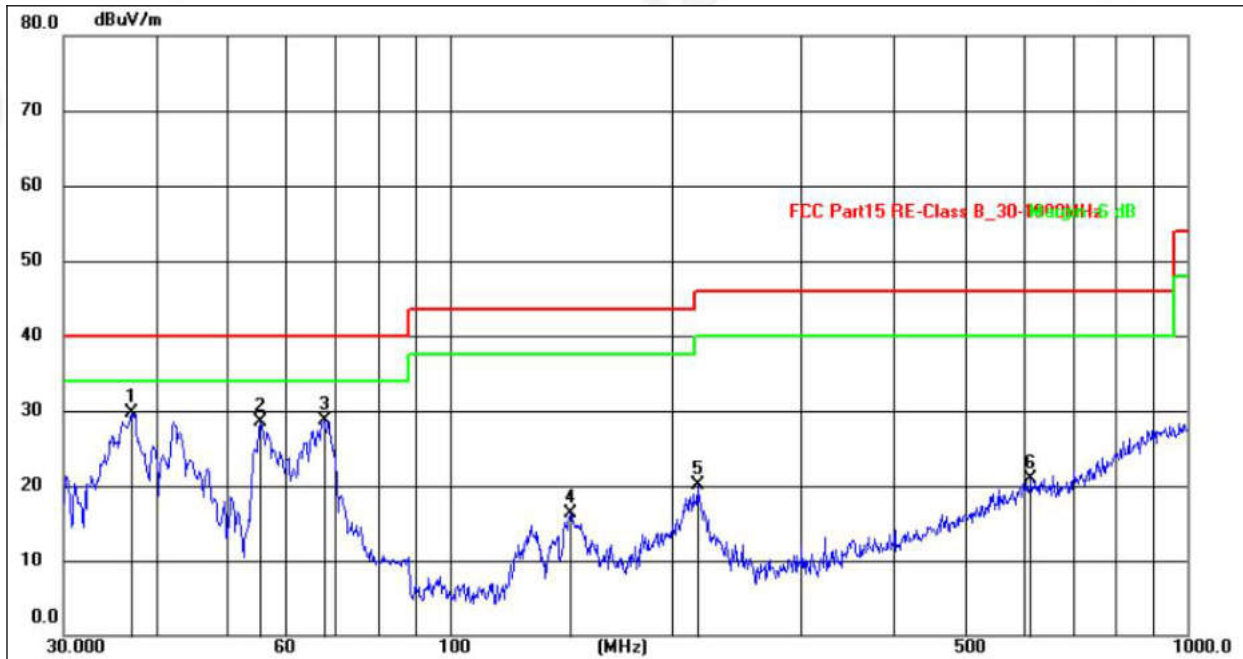

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.0248	47.02	-17.31	29.71	40.00	-10.29	QP
2	55.4147	46.34	-17.85	28.49	40.00	-11.51	QP
3	67.6751	47.71	-19.10	28.61	40.00	-11.39	QP
4	145.8611	36.98	-20.71	16.27	43.50	-27.23	QP
5	216.7828	40.60	-20.44	20.16	46.00	-25.84	QP
6	614.2142	28.72	-7.75	20.97	46.00	-25.03	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.All modes were tested, and only the worst test data was recorded is 802.11n20 - 5745MHz.



Between 1GHz – 40GHz

Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 19V
Test Mode :	5.2G TX - 802.11a/ n20/ ac20/ n40/ ac40/ac80		
Note: All patterns have been tested, and only the worst test data recorded in this report is 802.11a/n20/ac20.			

**802.11a**

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	5150.00	41.66	30.45	8.77	38.66	58.64	74.00	-15.36	PK
V	5150.00	31.54	30.45	8.77	38.66	48.52	54.00	-5.48	AV
V	10360.00	52.14	30.55	5.77	24.66	52.02	74.00	-21.98	PK
V	10360.00	42.99	30.55	5.77	24.66	42.87	54.00	-11.13	AV
V	15540.00	53.77	30.33	6.32	24.55	54.31	74.00	-19.69	PK
V	15540.00	42.88	30.33	6.32	24.55	43.42	54.00	-10.58	AV
V	20720.00	49.66	30.85	7.45	24.69	50.95	74.00	-23.05	PK
V	20720.00	42.91	30.85	7.45	24.69	44.20	54.00	-9.80	AV
V	25900.00	51.55	31.02	8.99	25.57	55.09	74.00	-18.91	PK
V	25900.00	42.75	31.02	8.99	25.57	46.29	54.00	-7.71	AV
H	5150.00	41.58	30.45	8.77	38.66	58.56	74.00	-15.44	PK
H	5150.00	31.69	30.45	8.77	38.66	48.67	54.00	-5.33	AV
H	10360.00	50.15	30.55	5.77	24.66	50.03	74.00	-23.97	PK
H	10360.00	42.44	30.55	5.77	24.66	42.32	54.00	-11.68	AV
H	15540.00	53.15	30.33	6.32	24.55	53.69	74.00	-20.31	PK
H	15540.00	42.99	30.33	6.32	24.55	43.53	54.00	-10.47	AV
H	20720.00	51.14	30.85	7.45	24.69	52.43	74.00	-21.57	PK
H	20720.00	43.04	30.85	7.45	24.69	44.33	54.00	-9.67	AV
H	25900.00	50.15	31.02	8.99	25.57	53.69	74.00	-20.31	PK
H	25900.00	42.83	31.02	8.99	25.57	46.37	54.00	-7.63	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5200MHz									
V	5150.00	40.33	30.45	8.77	38.66	57.31	74.00	-16.69	PK
V	5150.00	29.89	30.45	8.77	38.66	46.87	54.00	-7.13	AV
V	10400.00	50.33	30.55	5.77	24.66	50.21	74.00	-23.79	PK
V	10400.00	41.17	30.55	5.77	24.66	41.05	54.00	-12.95	AV
V	15600.00	51.91	30.33	6.32	24.55	52.45	74.00	-21.55	PK
V	15600.00	40.62	30.33	6.32	24.55	41.16	54.00	-12.84	AV
V	20800.00	47.73	30.85	7.45	24.69	49.02	74.00	-24.98	PK
V	20800.00	40.84	30.85	7.45	24.69	42.13	54.00	-11.87	AV
V	26000.00	49.76	31.02	8.99	25.57	53.30	74.00	-20.70	PK
V	26000.00	40.73	31.02	8.99	25.57	44.27	54.00	-9.73	AV
H	5150.00	39.85	30.45	8.77	38.66	56.83	74.00	-17.17	PK
H	5150.00	29.90	30.45	8.77	38.66	46.88	54.00	-7.12	AV
H	10400.00	47.94	30.55	5.77	24.66	47.82	74.00	-26.18	PK
H	10400.00	40.73	30.55	5.77	24.66	40.61	54.00	-13.39	AV
H	15600.00	50.80	30.33	6.32	24.55	51.34	74.00	-22.66	PK



H	15600.00	40.89	30.33	6.32	24.55	41.43	54.00	-12.57	AV
H	20800.00	49.06	30.85	7.45	24.69	50.35	74.00	-23.65	PK
H	20800.00	41.34	30.85	7.45	24.69	42.63	54.00	-11.37	AV
H	26000.00	48.43	31.02	8.99	25.57	51.97	74.00	-22.03	PK
H	26000.00	41.24	31.02	8.99	25.57	44.78	54.00	-9.22	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5240MHz									
V	5350.00	40.63	30.45	8.77	38.66	57.61	74.00	-16.39	PK
V	5350.00	30.98	30.45	8.77	38.66	47.96	54.00	-6.04	AV
V	10480.00	50.89	30.55	5.77	24.66	50.77	74.00	-23.23	PK
V	10480.00	41.60	30.55	5.77	24.66	41.48	54.00	-12.52	AV
V	15720.00	52.78	30.33	6.32	24.55	53.32	74.00	-20.68	PK
V	15720.00	42.09	30.33	6.32	24.55	42.63	54.00	-11.37	AV
V	20960.00	48.61	30.85	7.45	24.69	49.90	74.00	-24.10	PK
V	20960.00	41.56	30.85	7.45	24.69	42.85	54.00	-11.15	AV
V	26200.00	50.86	31.02	8.99	25.57	54.40	74.00	-19.60	PK
V	26200.00	41.55	31.02	8.99	25.57	45.09	54.00	-8.91	AV
H	5350.00	40.65	30.45	8.77	38.66	57.63	74.00	-16.37	PK
H	5350.00	31.09	30.45	8.77	38.66	48.07	54.00	-5.93	AV
H	10480.00	48.90	30.55	5.77	24.66	48.78	74.00	-25.22	PK
H	10480.00	42.02	30.55	5.77	24.66	41.90	54.00	-12.10	AV
H	15720.00	51.57	30.33	6.32	24.55	52.11	74.00	-21.89	PK
H	15720.00	41.46	30.33	6.32	24.55	42.00	54.00	-12.00	AV
H	20960.00	49.92	30.85	7.45	24.69	51.21	74.00	-22.79	PK
H	20960.00	42.11	30.85	7.45	24.69	43.40	54.00	-10.60	AV
H	26200.00	49.10	31.02	8.99	25.57	52.64	74.00	-21.36	PK
H	26200.00	42.17	31.02	8.99	25.57	45.71	54.00	-8.29	AV

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	5150.00	42.01	30.45	8.77	38.66	58.99	74.00	-15.01	PK
V	5150.00	31.89	30.45	8.77	38.66	48.87	54.00	-5.13	AV
V	10360.00	52.49	30.55	5.77	24.66	52.37	74.00	-21.63	PK
V	10360.00	43.34	30.55	5.77	24.66	43.22	54.00	-10.78	AV
V	15540.00	54.12	30.33	6.32	24.55	54.66	74.00	-19.34	PK
V	15540.00	43.23	30.33	6.32	24.55	43.77	54.00	-10.23	AV
V	20720.00	50.01	30.85	7.45	24.69	51.30	74.00	-22.70	PK
V	20720.00	43.26	30.85	7.45	24.69	44.55	54.00	-9.45	AV
V	25900.00	51.90	31.02	8.99	25.57	55.44	74.00	-18.56	PK
V	25900.00	43.10	31.02	8.99	25.57	46.64	54.00	-7.36	AV
H	5150.00	41.93	30.45	8.77	38.66	58.91	74.00	-15.09	PK
H	5150.00	32.04	30.45	8.77	38.66	49.02	54.00	-4.98	AV
H	10360.00	50.50	30.55	5.77	24.66	50.38	74.00	-23.62	PK
H	10360.00	42.79	30.55	5.77	24.66	42.67	54.00	-11.33	AV
H	15540.00	53.50	30.33	6.32	24.55	54.04	74.00	-19.96	PK
H	15540.00	43.34	30.33	6.32	24.55	43.88	54.00	-10.12	AV
H	20720.00	51.49	30.85	7.45	24.69	52.78	74.00	-21.22	PK
H	20720.00	43.39	30.85	7.45	24.69	44.68	54.00	-9.32	AV
H	25900.00	50.50	31.02	8.99	25.57	54.04	74.00	-19.96	PK
H	25900.00	43.18	31.02	8.99	25.57	46.72	54.00	-7.28	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5200MHz									
V	5150.00	41.59	30.45	8.77	38.66	58.57	74.00	-15.43	PK
V	5150.00	31.15	30.45	8.77	38.66	48.13	54.00	-5.87	AV
V	10400.00	51.59	30.55	5.77	24.66	51.47	74.00	-22.53	PK
V	10400.00	42.43	30.55	5.77	24.66	42.31	54.00	-11.69	AV
V	15600.00	53.17	30.33	6.32	24.55	53.71	74.00	-20.29	PK
V	15600.00	41.88	30.33	6.32	24.55	42.42	54.00	-11.58	AV
V	20800.00	48.99	30.85	7.45	24.69	50.28	74.00	-23.72	PK
V	20800.00	42.10	30.85	7.45	24.69	43.39	54.00	-10.61	AV
V	26000.00	51.02	31.02	8.99	25.57	54.56	74.00	-19.44	PK
V	26000.00	41.99	31.02	8.99	25.57	45.53	54.00	-8.47	AV
H	5150.00	41.11	30.45	8.77	38.66	58.09	74.00	-15.91	PK
H	5150.00	31.16	30.45	8.77	38.66	48.14	54.00	-5.86	AV
H	10400.00	49.20	30.55	5.77	24.66	49.08	74.00	-24.92	PK
H	10400.00	41.99	30.55	5.77	24.66	41.87	54.00	-12.13	AV
H	15600.00	52.06	30.33	6.32	24.55	52.60	74.00	-21.40	PK
H	15600.00	42.15	30.33	6.32	24.55	42.69	54.00	-11.31	AV
H	20800.00	50.32	30.85	7.45	24.69	51.61	74.00	-22.39	PK
H	20800.00	42.60	30.85	7.45	24.69	43.89	54.00	-10.11	AV
H	26000.00	49.69	31.02	8.99	25.57	53.23	74.00	-20.77	PK
H	26000.00	42.50	31.02	8.99	25.57	46.04	54.00	-7.96	AV



Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5240MHz									
V	5350.00	40.83	30.45	8.77	38.66	57.81	74.00	-16.19	PK
V	5350.00	31.18	30.45	8.77	38.66	48.16	54.00	-5.84	AV
V	10480.00	51.09	30.55	5.77	24.66	50.97	74.00	-23.03	PK
V	10480.00	41.80	30.55	5.77	24.66	41.68	54.00	-12.32	AV
V	15720.00	52.98	30.33	6.32	24.55	53.52	74.00	-20.48	PK
V	15720.00	42.29	30.33	6.32	24.55	42.83	54.00	-11.17	AV
V	20960.00	48.81	30.85	7.45	24.69	50.10	74.00	-23.90	PK
V	20960.00	41.76	30.85	7.45	24.69	43.05	54.00	-10.95	AV
V	26200.00	51.06	31.02	8.99	25.57	54.60	74.00	-19.40	PK
V	26200.00	41.75	31.02	8.99	25.57	45.29	54.00	-8.71	AV
H	5350.00	40.85	30.45	8.77	38.66	57.83	74.00	-16.17	PK
H	5350.00	31.29	30.45	8.77	38.66	48.27	54.00	-5.73	AV
H	10480.00	49.10	30.55	5.77	24.66	48.98	74.00	-25.02	PK
H	10480.00	42.22	30.55	5.77	24.66	42.10	54.00	-11.90	AV
H	15720.00	51.77	30.33	6.32	24.55	52.31	74.00	-21.69	PK
H	15720.00	41.66	30.33	6.32	24.55	42.20	54.00	-11.80	AV
H	20960.00	50.12	30.85	7.45	24.69	51.41	74.00	-22.59	PK
H	20960.00	42.31	30.85	7.45	24.69	43.60	54.00	-10.40	AV
H	26200.00	49.30	31.02	8.99	25.57	52.84	74.00	-21.16	PK
H	26200.00	42.37	31.02	8.99	25.57	45.91	54.00	-8.09	AV

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**802.11ac20**

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	5150.00	41.83	30.45	8.77	38.66	58.81	74.00	-15.19	PK
V	5150.00	31.71	30.45	8.77	38.66	48.69	54.00	-5.31	AV
V	10360.00	52.31	30.55	5.77	24.66	52.19	74.00	-21.81	PK
V	10360.00	43.16	30.55	5.77	24.66	43.04	54.00	-10.96	AV
V	15540.00	53.94	30.33	6.32	24.55	54.48	74.00	-19.52	PK
V	15540.00	43.05	30.33	6.32	24.55	43.59	54.00	-10.41	AV
V	20720.00	49.83	30.85	7.45	24.69	51.12	74.00	-22.88	PK
V	20720.00	43.08	30.85	7.45	24.69	44.37	54.00	-9.63	AV
V	25900.00	51.72	31.02	8.99	25.57	55.26	74.00	-18.74	PK
V	25900.00	42.92	31.02	8.99	25.57	46.46	54.00	-7.54	AV
H	5150.00	41.75	30.45	8.77	38.66	58.73	74.00	-15.27	PK
H	5150.00	31.86	30.45	8.77	38.66	48.84	54.00	-5.16	AV
H	10360.00	50.32	30.55	5.77	24.66	50.20	74.00	-23.80	PK
H	10360.00	42.61	30.55	5.77	24.66	42.49	54.00	-11.51	AV
H	15540.00	53.32	30.33	6.32	24.55	53.86	74.00	-20.14	PK
H	15540.00	43.16	30.33	6.32	24.55	43.70	54.00	-10.30	AV
H	20720.00	51.31	30.85	7.45	24.69	52.60	74.00	-21.40	PK
H	20720.00	43.21	30.85	7.45	24.69	44.50	54.00	-9.50	AV
H	25900.00	50.32	31.02	8.99	25.57	53.86	74.00	-20.14	PK
H	25900.00	43.00	31.02	8.99	25.57	46.54	54.00	-7.46	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5200MHz									
V	5150.00	40.72	30.45	8.77	38.66	57.70	74.00	-16.30	PK
V	5150.00	30.28	30.45	8.77	38.66	47.26	54.00	-6.74	AV
V	10400.00	50.72	30.55	5.77	24.66	50.60	74.00	-23.40	PK
V	10400.00	41.56	30.55	5.77	24.66	41.44	54.00	-12.56	AV
V	15600.00	52.30	30.33	6.32	24.55	52.84	74.00	-21.16	PK
V	15600.00	41.01	30.33	6.32	24.55	41.55	54.00	-12.45	AV
V	20800.00	48.12	30.85	7.45	24.69	49.41	74.00	-24.59	PK
V	20800.00	41.23	30.85	7.45	24.69	42.52	54.00	-11.48	AV
V	26000.00	50.15	31.02	8.99	25.57	53.69	74.00	-20.31	PK
V	26000.00	41.12	31.02	8.99	25.57	44.66	54.00	-9.34	AV
H	5150.00	40.24	30.45	8.77	38.66	57.22	74.00	-16.78	PK
H	5150.00	30.29	30.45	8.77	38.66	47.27	54.00	-6.73	AV
H	10400.00	48.33	30.55	5.77	24.66	48.21	74.00	-25.79	PK
H	10400.00	41.12	30.55	5.77	24.66	41.00	54.00	-13.00	AV
H	15600.00	51.19	30.33	6.32	24.55	51.73	74.00	-22.27	PK
H	15600.00	41.28	30.33	6.32	24.55	41.82	54.00	-12.18	AV
H	20800.00	49.45	30.85	7.45	24.69	50.74	74.00	-23.26	PK
H	20800.00	41.73	30.85	7.45	24.69	43.02	54.00	-10.98	AV
H	26000.00	48.82	31.02	8.99	25.57	52.36	74.00	-21.64	PK
H	26000.00	41.63	31.02	8.99	25.57	45.17	54.00	-8.83	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5240MHz									
V	5350.00	40.70	30.45	8.77	38.66	57.68	74.00	-16.32	PK
V	5350.00	31.05	30.45	8.77	38.66	48.03	54.00	-5.97	AV
V	10480.00	50.96	30.55	5.77	24.66	50.84	74.00	-23.16	PK
V	10480.00	41.67	30.55	5.77	24.66	41.55	54.00	-12.45	AV
V	15720.00	52.85	30.33	6.32	24.55	53.39	74.00	-20.61	PK
V	15720.00	42.16	30.33	6.32	24.55	42.70	54.00	-11.30	AV
V	20960.00	48.68	30.85	7.45	24.69	49.97	74.00	-24.03	PK
V	20960.00	41.63	30.85	7.45	24.69	42.92	54.00	-11.08	AV
V	26200.00	50.93	31.02	8.99	25.57	54.47	74.00	-19.53	PK
V	26200.00	41.62	31.02	8.99	25.57	45.16	54.00	-8.84	AV
H	5350.00	40.72	30.45	8.77	38.66	57.70	74.00	-16.30	PK
H	5350.00	31.16	30.45	8.77	38.66	48.14	54.00	-5.86	AV
H	10480.00	48.97	30.55	5.77	24.66	48.85	74.00	-25.15	PK
H	10480.00	42.09	30.55	5.77	24.66	41.97	54.00	-12.03	AV
H	15720.00	51.64	30.33	6.32	24.55	52.18	74.00	-21.82	PK
H	15720.00	41.53	30.33	6.32	24.55	42.07	54.00	-11.93	AV
H	20960.00	49.99	30.85	7.45	24.69	51.28	74.00	-22.72	PK
H	20960.00	42.18	30.85	7.45	24.69	43.47	54.00	-10.53	AV
H	26200.00	49.17	31.02	8.99	25.57	52.71	74.00	-21.29	PK
H	26200.00	42.24	31.02	8.99	25.57	45.78	54.00	-8.22	AV

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.





Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 19V
Test Mode :	5.8G TX - 802.11a/ n20/ ac20/ n40/ ac40/ac80		
Note: All patterns have been tested, and only the worst test data recorded in this report is 802.11a/n20/ac20.			

**802.11a**

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	50.21	30.55	5.77	24.66	50.09	74.00	-23.91	PK
V	11490.00	42.49	30.55	5.77	24.66	42.37	54.00	-11.63	AV
V	17235.00	51.48	30.33	6.32	24.55	52.02	68.20	-16.18	PK
V	17235.00	42.01	30.33	6.32	24.55	42.55	54.00	-11.45	AV
V	22980.00	49.09	30.85	7.45	24.69	50.38	74.00	-23.62	PK
V	22980.00	41.94	30.85	7.45	24.69	43.23	54.00	-10.77	AV
V	28725.00	52.34	31.02	8.99	25.57	55.88	68.20	-12.32	PK
V	28725.00	42.16	31.02	8.99	25.57	45.70	54.00	-8.30	AV
H	11490.00	50.96	30.55	5.77	24.66	50.84	74.00	-23.16	PK
H	11490.00	42.46	30.55	5.77	24.66	42.34	54.00	-11.66	AV
H	17235.00	52.97	30.33	6.32	24.55	53.51	68.20	-14.69	PK
H	17235.00	42.17	30.33	6.32	24.55	42.71	54.00	-11.29	AV
H	22980.00	50.93	30.85	7.45	24.69	52.22	74.00	-21.78	PK
H	22980.00	42.40	30.85	7.45	24.69	43.69	54.00	-10.31	AV
H	28725.00	51.52	31.02	8.99	25.57	55.06	68.20	-13.14	PK
H	28725.00	42.63	31.02	8.99	25.57	46.17	54.00	-7.83	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	50.36	30.55	5.77	24.66	50.24	74.00	-23.76	PK
V	11570.00	42.75	30.55	5.77	24.66	42.63	54.00	-11.37	AV
V	17355.00	49.50	30.33	6.32	24.55	50.04	68.20	-18.16	PK
V	17355.00	42.55	30.33	6.32	24.55	43.09	54.00	-10.91	AV
V	23140.00	51.58	30.85	7.45	24.69	52.87	68.20	-15.33	PK
V	23140.00	42.36	30.85	7.45	24.69	43.65	54.00	-10.35	AV
V	28925.00	49.53	31.02	8.99	25.57	53.07	68.20	-15.13	PK
V	28925.00	42.58	31.02	8.99	25.57	46.12	54.00	-7.88	AV
H	11570.00	49.71	30.55	5.77	24.66	49.59	74.00	-24.41	PK
H	11570.00	42.83	30.55	5.77	24.66	42.71	54.00	-11.29	AV
H	17355.00	53.94	30.33	6.32	24.55	54.48	68.20	-13.72	PK
H	17355.00	42.36	30.33	6.32	24.55	42.90	54.00	-11.10	AV
H	23140.00	51.45	30.85	7.45	24.69	52.74	68.20	-15.46	PK
H	23140.00	42.77	30.85	7.45	24.69	44.06	54.00	-9.94	AV
H	28925.00	49.35	31.02	8.99	25.57	52.89	68.20	-15.31	PK
H	28925.00	42.95	31.02	8.99	25.57	46.49	54.00	-7.51	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	50.84	30.55	5.77	24.66	50.72	74.00	-23.28	PK
V	11650.00	42.65	30.55	5.77	24.66	42.53	54.00	-11.47	AV
V	17475.00	49.53	30.33	6.32	24.55	50.07	68.20	-18.13	PK
V	17475.00	42.40	30.33	6.32	24.55	42.94	54.00	-11.06	AV
V	23300.00	50.60	30.85	7.45	24.69	51.89	68.20	-16.31	PK
V	23300.00	42.49	30.85	7.45	24.69	43.78	54.00	-10.22	AV
V	29125.00	53.18	31.02	8.99	25.57	56.72	68.20	-11.48	PK
V	29125.00	42.43	31.02	8.99	25.57	45.97	54.00	-8.03	AV
H	11650.00	51.83	30.55	5.77	24.66	51.71	74.00	-22.29	PK
H	11650.00	42.19	30.55	5.77	24.66	42.07	54.00	-11.93	AV
H	17475.00	52.42	30.33	6.32	24.55	52.96	68.20	-15.24	PK
H	17475.00	42.63	30.33	6.32	24.55	43.17	54.00	-10.83	AV
H	23300.00	53.26	30.85	7.45	24.69	54.55	68.20	-13.65	PK
H	23300.00	42.43	30.85	7.45	24.69	43.72	54.00	-10.28	AV
H	29125.00	49.25	31.02	8.99	25.57	52.79	68.20	-15.41	PK
H	29125.00	42.81	31.02	8.99	25.57	46.35	54.00	-7.65	AV

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	50.58	30.55	5.77	24.66	50.46	74.00	-23.54	PK
V	11490.00	42.86	30.55	5.77	24.66	42.74	54.00	-11.26	AV
V	17235.00	51.85	30.33	6.32	24.55	52.39	68.20	-15.81	PK
V	17235.00	42.38	30.33	6.32	24.55	42.92	54.00	-11.08	AV
V	22980.00	49.46	30.85	7.45	24.69	50.75	74.00	-23.25	PK
V	22980.00	42.31	30.85	7.45	24.69	43.60	54.00	-10.40	AV
V	28725.00	52.71	31.02	8.99	25.57	56.25	68.20	-11.95	PK
V	28725.00	42.53	31.02	8.99	25.57	46.07	54.00	-7.93	AV
H	11490.00	51.33	30.55	5.77	24.66	51.21	74.00	-22.79	PK
H	11490.00	42.83	30.55	5.77	24.66	42.71	54.00	-11.29	AV
H	17235.00	53.34	30.33	6.32	24.55	53.88	68.20	-14.32	PK
H	17235.00	42.54	30.33	6.32	24.55	43.08	54.00	-10.92	AV
H	22980.00	51.30	30.85	7.45	24.69	52.59	74.00	-21.41	PK
H	22980.00	42.77	30.85	7.45	24.69	44.06	54.00	-9.94	AV
H	28725.00	51.89	31.02	8.99	25.57	55.43	68.20	-12.77	PK
H	28725.00	43.00	31.02	8.99	25.57	46.54	54.00	-7.46	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	50.59	30.55	5.77	24.66	50.47	74.00	-23.53	PK
V	11570.00	42.98	30.55	5.77	24.66	42.86	54.00	-11.14	AV
V	17355.00	49.73	30.33	6.32	24.55	50.27	68.20	-17.93	PK
V	17355.00	42.78	30.33	6.32	24.55	43.32	54.00	-10.68	AV
V	23140.00	51.81	30.85	7.45	24.69	53.10	68.20	-15.10	PK
V	23140.00	42.59	30.85	7.45	24.69	43.88	54.00	-10.12	AV
V	28925.00	49.76	31.02	8.99	25.57	53.30	68.20	-14.90	PK
V	28925.00	42.81	31.02	8.99	25.57	46.35	54.00	-7.65	AV
H	11570.00	49.94	30.55	5.77	24.66	49.82	74.00	-24.18	PK
H	11570.00	43.06	30.55	5.77	24.66	42.94	54.00	-11.06	AV
H	17355.00	54.17	30.33	6.32	24.55	54.71	68.20	-13.49	PK
H	17355.00	42.59	30.33	6.32	24.55	43.13	54.00	-10.87	AV
H	23140.00	51.68	30.85	7.45	24.69	52.97	68.20	-15.23	PK
H	23140.00	43.00	30.85	7.45	24.69	44.29	54.00	-9.71	AV
H	28925.00	49.58	31.02	8.99	25.57	53.12	68.20	-15.08	PK
H	28925.00	43.18	31.02	8.99	25.57	46.72	54.00	-7.28	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	51.09	30.55	5.77	24.66	50.97	74.00	-23.03	PK
V	11650.00	42.90	30.55	5.77	24.66	42.78	54.00	-11.22	AV
V	17475.00	49.78	30.33	6.32	24.55	50.32	68.20	-17.88	PK
V	17475.00	42.65	30.33	6.32	24.55	43.19	54.00	-10.81	AV
V	23300.00	50.85	30.85	7.45	24.69	52.14	68.20	-16.06	PK
V	23300.00	42.74	30.85	7.45	24.69	44.03	54.00	-9.97	AV
V	29125.00	53.43	31.02	8.99	25.57	56.97	68.20	-11.23	PK
V	29125.00	42.68	31.02	8.99	25.57	46.22	54.00	-7.78	AV
H	11650.00	52.08	30.55	5.77	24.66	51.96	74.00	-22.04	PK
H	11650.00	42.44	30.55	5.77	24.66	42.32	54.00	-11.68	AV
H	17475.00	52.67	30.33	6.32	24.55	53.21	68.20	-14.99	PK
H	17475.00	42.88	30.33	6.32	24.55	43.42	54.00	-10.58	AV
H	23300.00	53.51	30.85	7.45	24.69	54.80	68.20	-13.40	PK
H	23300.00	42.68	30.85	7.45	24.69	43.97	54.00	-10.03	AV
H	29125.00	49.50	31.02	8.99	25.57	53.04	68.20	-15.16	PK
H	29125.00	43.06	31.02	8.99	25.57	46.60	54.00	-7.40	AV

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**802.11ac20**

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	50.66	30.55	5.77	24.66	50.54	74.00	-23.46	PK
V	11490.00	42.94	30.55	5.77	24.66	42.82	54.00	-11.18	AV
V	17235.00	51.93	30.33	6.32	24.55	52.47	68.20	-15.73	PK
V	17235.00	42.46	30.33	6.32	24.55	43.00	54.00	-11.00	AV
V	22980.00	49.54	30.85	7.45	24.69	50.83	74.00	-23.17	PK
V	22980.00	42.39	30.85	7.45	24.69	43.68	54.00	-10.32	AV
V	28725.00	52.79	31.02	8.99	25.57	56.33	68.20	-11.87	PK
V	28725.00	42.61	31.02	8.99	25.57	46.15	54.00	-7.85	AV
H	11490.00	51.41	30.55	5.77	24.66	51.29	74.00	-22.71	PK
H	11490.00	42.91	30.55	5.77	24.66	42.79	54.00	-11.21	AV
H	17235.00	53.42	30.33	6.32	24.55	53.96	68.20	-14.24	PK
H	17235.00	42.62	30.33	6.32	24.55	43.16	54.00	-10.84	AV
H	22980.00	51.38	30.85	7.45	24.69	52.67	74.00	-21.33	PK
H	22980.00	42.85	30.85	7.45	24.69	44.14	54.00	-9.86	AV
H	28725.00	51.97	31.02	8.99	25.57	55.51	68.20	-12.69	PK
H	28725.00	43.08	31.02	8.99	25.57	46.62	54.00	-7.38	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	50.71	30.55	5.77	24.66	50.59	74.00	-23.41	PK
V	11570.00	43.10	30.55	5.77	24.66	42.98	54.00	-11.02	AV
V	17355.00	49.85	30.33	6.32	24.55	50.39	68.20	-17.81	PK
V	17355.00	42.90	30.33	6.32	24.55	43.44	54.00	-10.56	AV
V	23140.00	51.93	30.85	7.45	24.69	53.22	68.20	-14.98	PK
V	23140.00	42.71	30.85	7.45	24.69	44.00	54.00	-10.00	AV
V	28925.00	49.88	31.02	8.99	25.57	53.42	68.20	-14.78	PK
V	28925.00	42.93	31.02	8.99	25.57	46.47	54.00	-7.53	AV
H	11570.00	50.06	30.55	5.77	24.66	49.94	74.00	-24.06	PK
H	11570.00	43.18	30.55	5.77	24.66	43.06	54.00	-10.94	AV
H	17355.00	54.29	30.33	6.32	24.55	54.83	68.20	-13.37	PK
H	17355.00	42.71	30.33	6.32	24.55	43.25	54.00	-10.75	AV
H	23140.00	51.80	30.85	7.45	24.69	53.09	68.20	-15.11	PK
H	23140.00	43.12	30.85	7.45	24.69	44.41	54.00	-9.59	AV
H	28925.00	49.70	31.02	8.99	25.57	53.24	68.20	-14.96	PK
H	28925.00	43.30	31.02	8.99	25.57	46.84	54.00	-7.16	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	51.01	30.55	5.77	24.66	50.89	74.00	-23.11	PK
V	11650.00	42.82	30.55	5.77	24.66	42.70	54.00	-11.30	AV
V	17475.00	49.70	30.33	6.32	24.55	50.24	68.20	-17.96	PK
V	17475.00	42.57	30.33	6.32	24.55	43.11	54.00	-10.89	AV
V	23300.00	50.77	30.85	7.45	24.69	52.06	68.20	-16.14	PK
V	23300.00	42.66	30.85	7.45	24.69	43.95	54.00	-10.05	AV
V	29125.00	53.35	31.02	8.99	25.57	56.89	68.20	-11.31	PK
V	29125.00	42.60	31.02	8.99	25.57	46.14	54.00	-7.86	AV
H	11650.00	52.00	30.55	5.77	24.66	51.88	74.00	-22.12	PK
H	11650.00	42.36	30.55	5.77	24.66	42.24	54.00	-11.76	AV
H	17475.00	52.59	30.33	6.32	24.55	53.13	68.20	-15.07	PK
H	17475.00	42.80	30.33	6.32	24.55	43.34	54.00	-10.66	AV
H	23300.00	53.43	30.85	7.45	24.69	54.72	68.20	-13.48	PK
H	23300.00	42.60	30.85	7.45	24.69	43.89	54.00	-10.11	AV
H	29125.00	49.42	31.02	8.99	25.57	52.96	68.20	-15.24	PK
H	29125.00	42.98	31.02	8.99	25.57	46.52	54.00	-7.48	AV

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 5. POWER SPECTRAL DENSITY TEST

### 5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(3)

Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.



## 5.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set  $RBW \geq 1/T$ , where T is defined in section II.B.I.a).
- b) Set  $VBW \geq 3 RBW$ .
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/RBW)$  to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/RBW)$  to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

## 5.3 DEVIATION FROM STANDARD

No deviation.

## 5.4 TEST SETUP



## 5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.





5.6 TEST RESULTS


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	DC 19V
Test Band :	5.2G		

5.2G						
Test mode	Test Channel (MHz)	PSD (dBm)	duty cycle Factor (dB)	Total PSD (dBm)	Limit (dBm/MHz)	Result
802.11a	5180	-6.557	2.53	-4.027	11	Pass
	5200	-6.481	2.53	-3.951	11	Pass
	5240	-5.713	2.53	-3.183	11	Pass
802.11n20	5180	-6.656	2.40	-4.256	11	Pass
	5200	-6.587	2.40	-4.187	11	Pass
	5240	-6.865	2.40	-4.465	11	Pass
802.11n40	5190	-12.588	4.14	-8.448	11	Pass
	5230	-9.998	4.14	-5.858	11	Pass
802.11ac20	5180	-6.521	2.52	-4.001	11	Pass
	5200	-6.995	2.52	-4.475	11	Pass
	5240	-6.937	2.52	-4.417	11	Pass
802.11ac40	5190	-12.295	4.11	-8.185	11	Pass
	5230	-10.081	4.11	-5.971	11	Pass
802.11ac80	5210	-18.061	6.21	-11.851	11	Pass


Note: duty cycle Factor see page 86.




(802.11a) PSD plot on channel 36

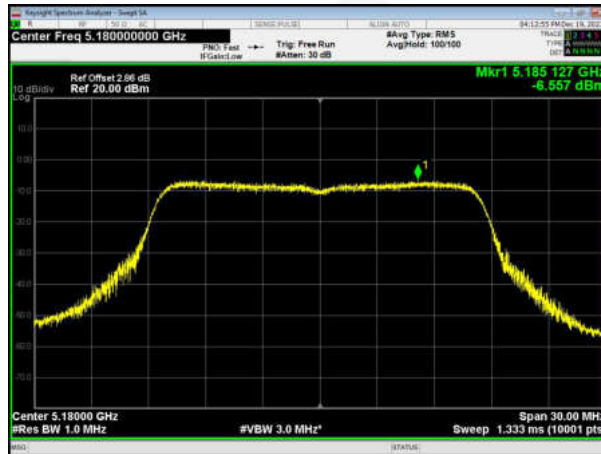

(802.11a) PSD plot on channel 40

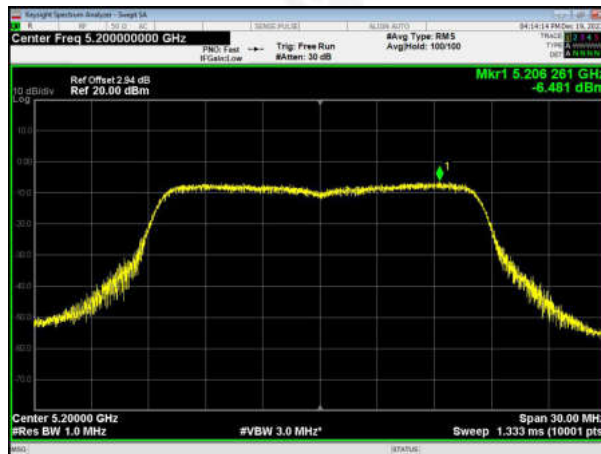


(802.11a) PSD plot on channel 48

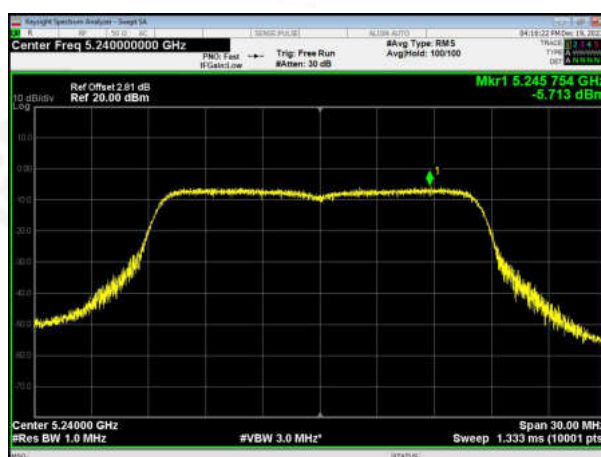





(802.11n20) PSD plot on channel 36

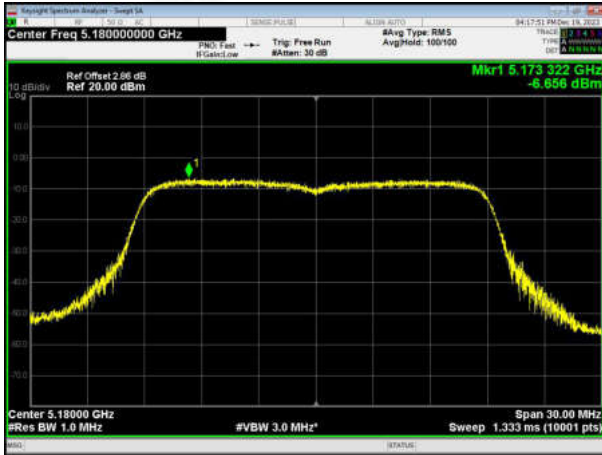


(802.11n40) PSD plot on channel 38

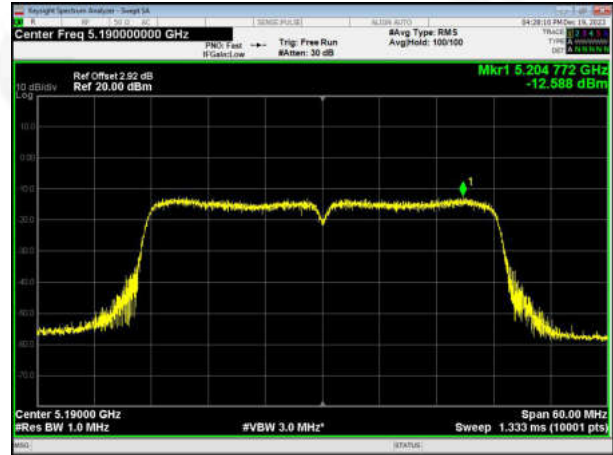


(802.11n20) PSD plot on channel 40

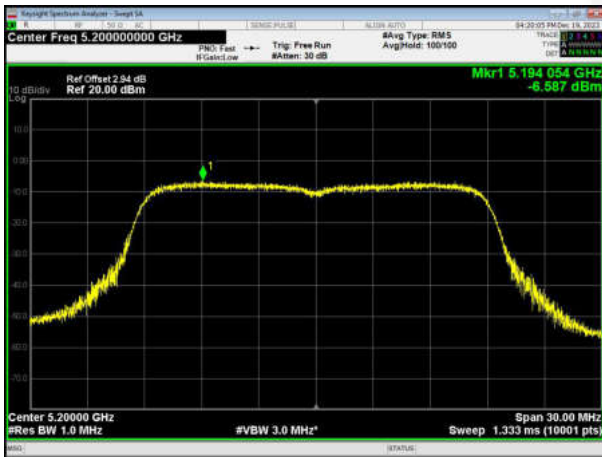

(802.11n40) PSD plot on channel 46

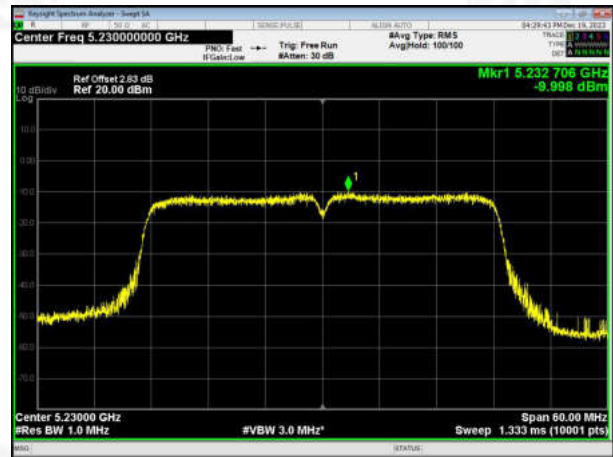


(802.11n20) PSD plot on channel 48

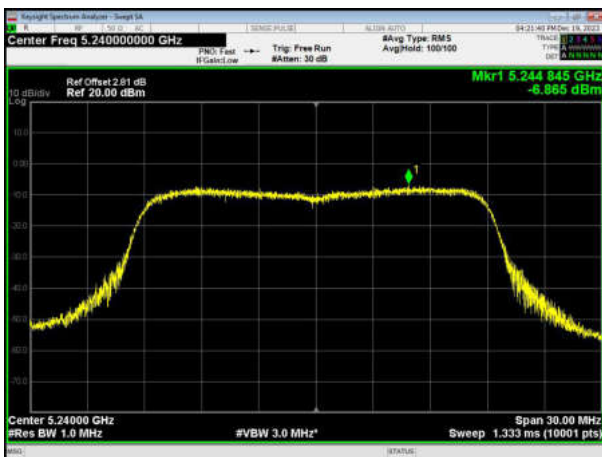





(802.11ac20) PSD plot on channel 36

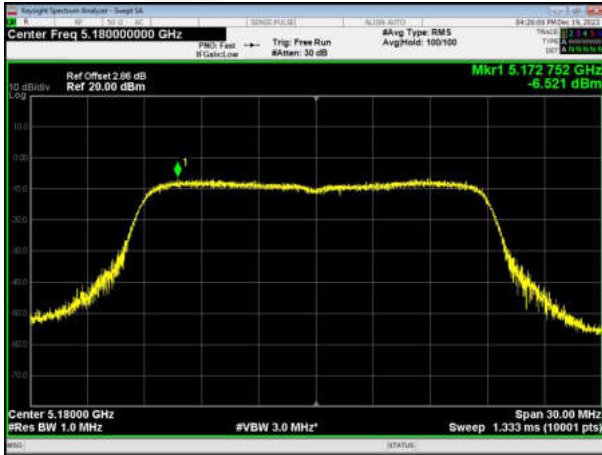


(802.11ac40) PSD plot on channel 38

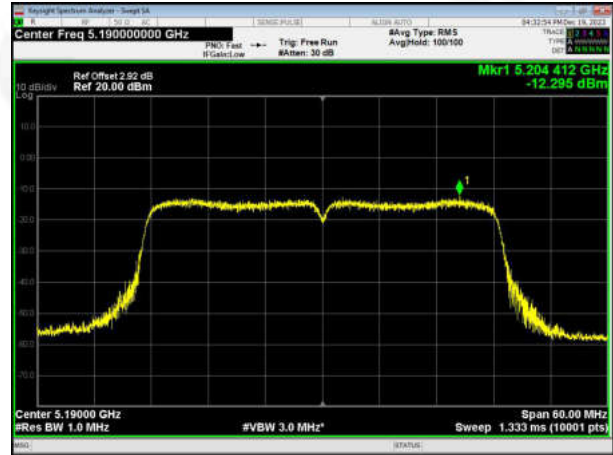


(802.11ac20) PSD plot on channel 40

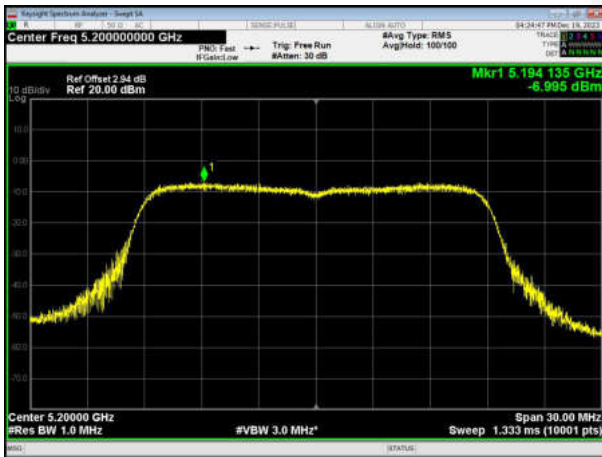


(802.11ac40) PSD plot on channel 46

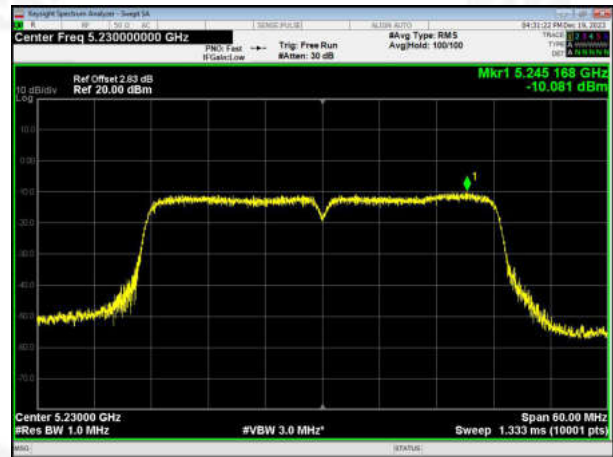

(802.11ac20) PSD plot on channel 48

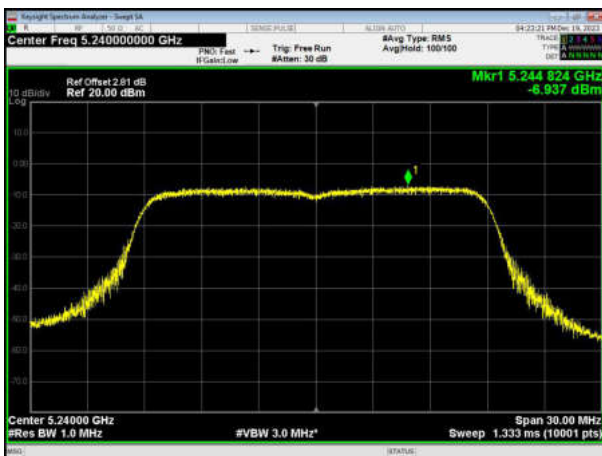

(802.11ac80) PSD plot on channel 42

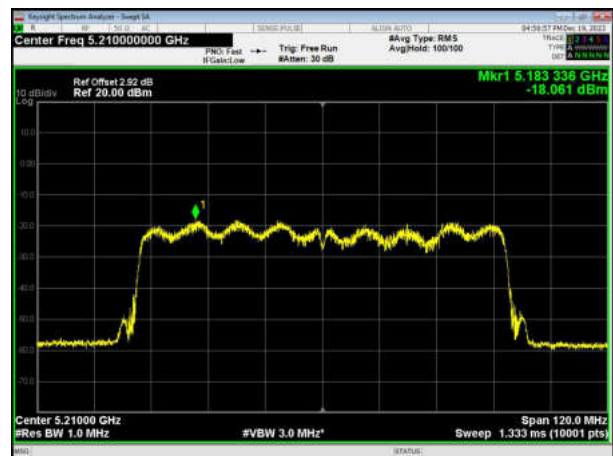




Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	DC 19V
Test Band :	5.8G		

5.8G						
Test mode	Test Channel (MHz)	PSD (dBm/500kHz)	duty cycle Factor (dB)	Total PSD (dBm)	Limit (dBm/500kHz)	Result
802.11a	5745	-8.956	2.40	-6.556	30	Pass
	5785	-8.305	2.40	-5.905	30	Pass
	5825	-8.899	2.40	-6.499	30	Pass
802.11n20	5745	-9.270	2.54	-6.730	30	Pass
	5785	-8.610	2.54	-6.070	30	Pass
	5825	-8.572	2.54	-6.032	30	Pass
802.11n40	5755	-14.959	4.13	-10.829	30	Pass
	5795	-14.684	4.13	-10.554	30	Pass
802.11ac20	5745	-8.878	2.53	-6.348	30	Pass
	5785	-8.475	2.53	-5.945	30	Pass
	5825	-8.350	2.53	-5.820	30	Pass
802.11ac40	5755	-14.692	4.11	-10.582	30	Pass
	5795	-14.055	4.11	-9.945	30	Pass
802.11ac80	5775	-16.770	6.23	-10.540	30	Pass

Note: duty cycle Factor see page 90.




(802.11a) PSD plot on channel 149

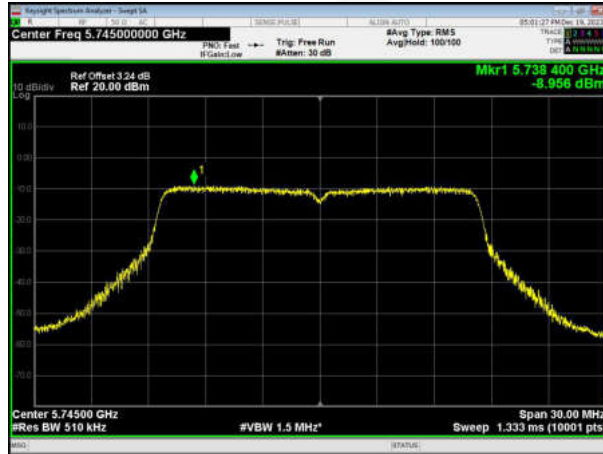

(802.11a) PSD plot on channel 157



(802.11a) PSD plot on channel 165

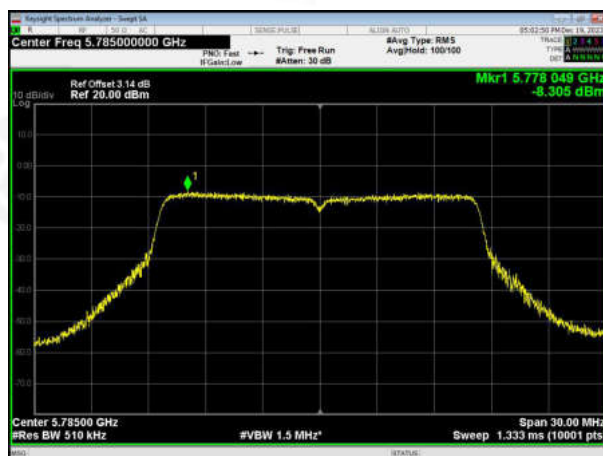





(802.11n20) PSD plot on channel 149



(802.11n40) PSD plot on channel 151

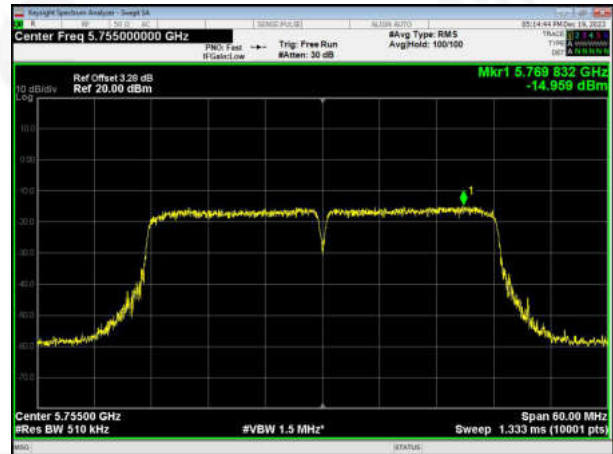


(802.11n20) PSD plot on channel 157

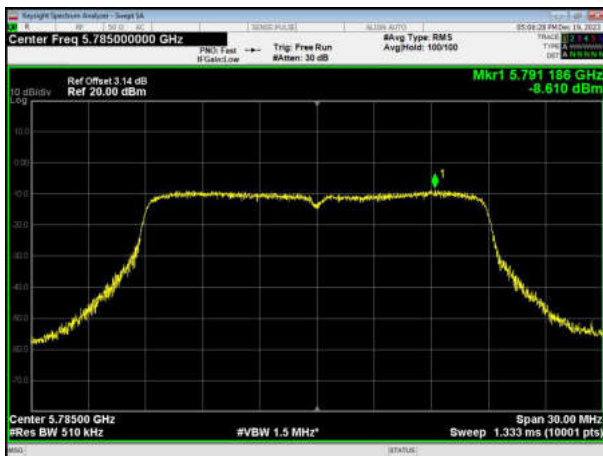

(802.11n40) PSD plot on channel 159



(802.11n20) PSD plot on channel 165

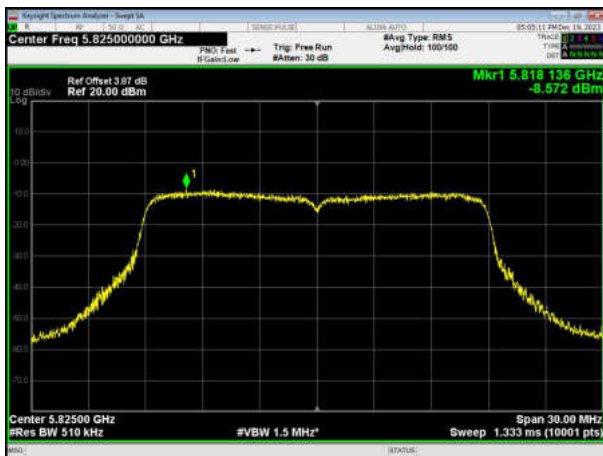





(802.11ac20) PSD plot on channel 149




(802.11ac40) PSD plot on channel 151

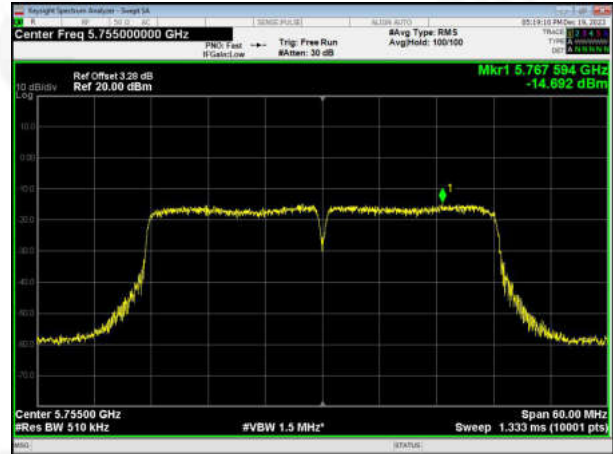


(802.11ac20) PSD plot on channel 157

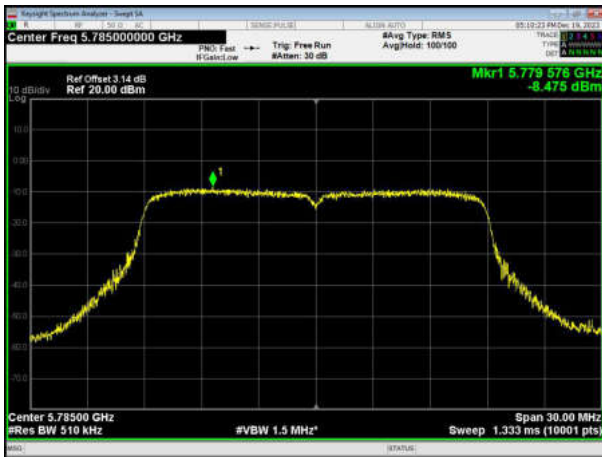


(802.11ac40) PSD plot on channel 159

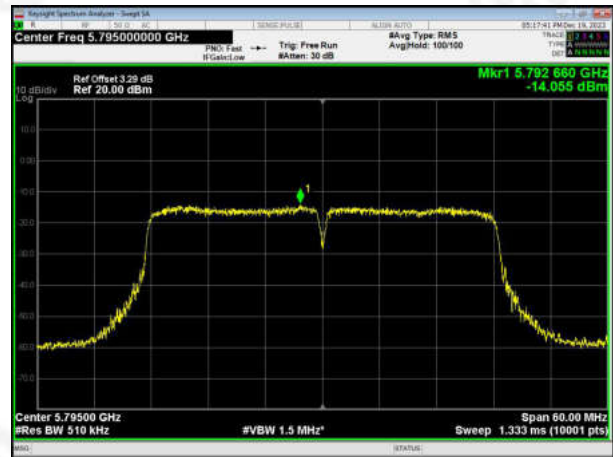

(802.11ac20) PSD plot on channel 165

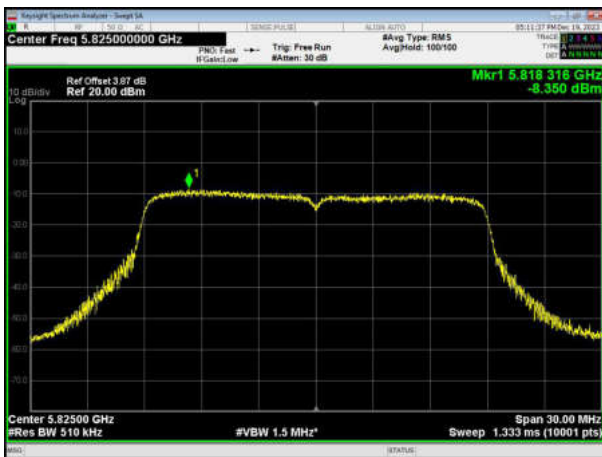

(802.11ac80) PSD plot on channel 155

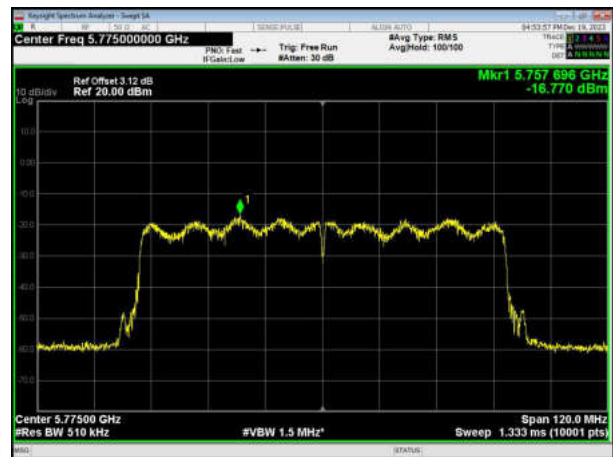





## 6. 26DB EMISSION BANDWIDTH & 6DB OCCUPIED BANDWIDTH

### 6.1 APPLIED PROCEDURES / LIMIT

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

### 6.2 TEST PROCEDURE

The following procedure shall be used for measuring 6dB Occupied Bandwidth:

The procedure for this method is as follows:

- a) Set RBW = 100KHz.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The following procedure shall be used for measuring 26dB Emission bandwidth:

The procedure for this method is as follows:

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.



### 6.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



6.4 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 19V
Test Band :	5.2G		

5.2G				
Test Mode	Test Channel (MHz)	26dB Emission Bandwidth (MHz)	Limit(KHz)	Result
802.11a	5180	19.89	N/A	Pass
	5200	19.94		
	5240	20.08		
802.11n20	5180	20.54	N/A	Pass
	5200	20.72		
	5240	20.61		
802.11n40	5190	41.56	N/A	Pass
	5230	41.33		
802.11ac20	5180	20.44	N/A	Pass
	5200	20.37		
	5240	20.67		
802.11ac40	5190	41.27	N/A	Pass
	5230	42.17		
802.11ac80	5210	81.56	N/A	Pass




### 5.2G Test plot

(802.11 a) 26dB Bandwidth plot on channel 36



(802.11 a) 26dB Bandwidth plot on channel 48

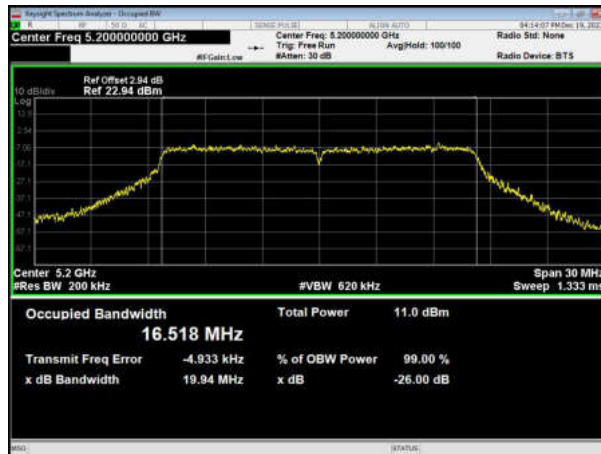


(802.11 a) 26dB Bandwidth plot on channel 48






### 5.2G Test plot


(802.11 n20) 26dB Bandwidth plot on channel 36

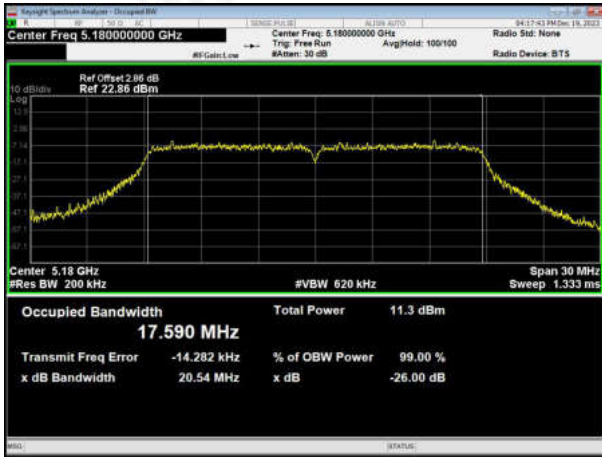


(802.11 n40) 26dB Bandwidth plot on channel 38

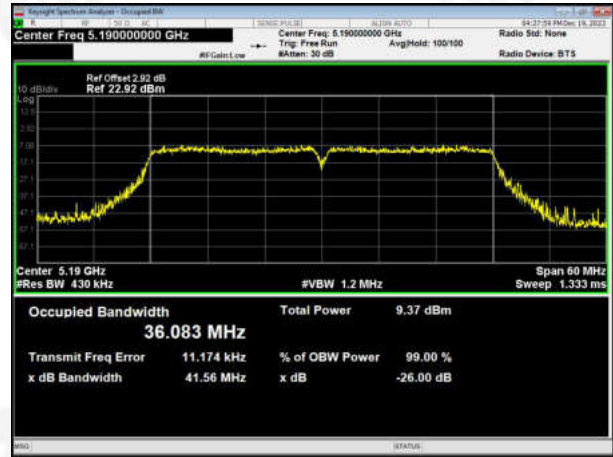

(802.11 n20) 26dB Bandwidth plot on channel 40

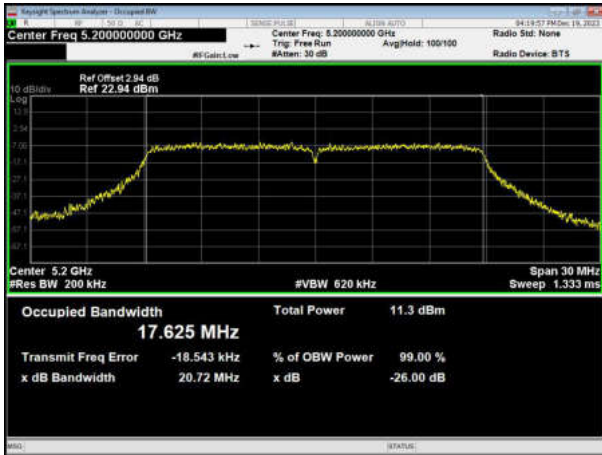

(802.11 n40) 26dB Bandwidth plot on channel 46

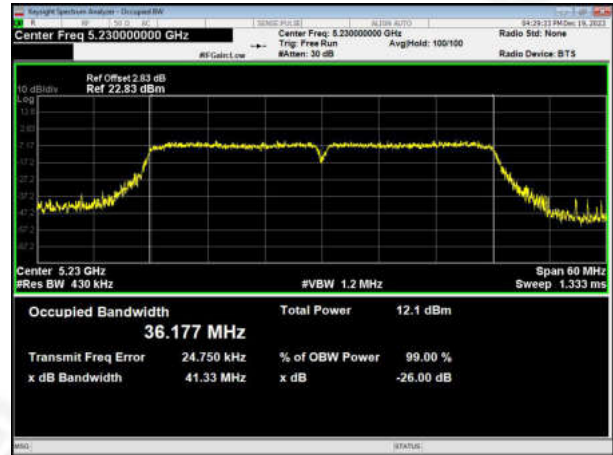


(802.11 n20) 26dB Bandwidth plot on channel 48





### 5.2G Test plot


(802.11 ac20) 26dB Bandwidth plot on channel 36

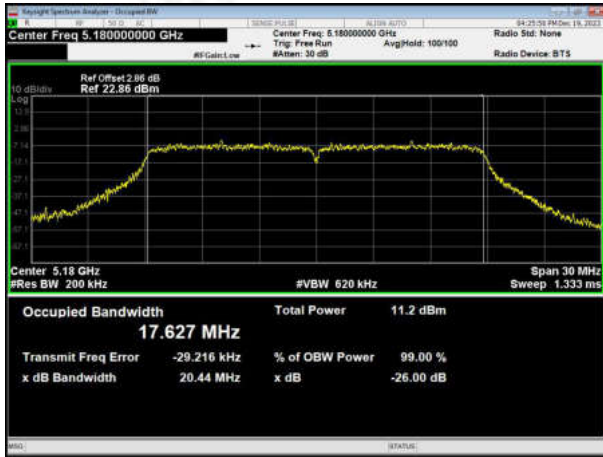

(802.11 ac40) 26dB Bandwidth plot on channel 38




(802.11 ac20) 26dB Bandwidth plot on channel 40

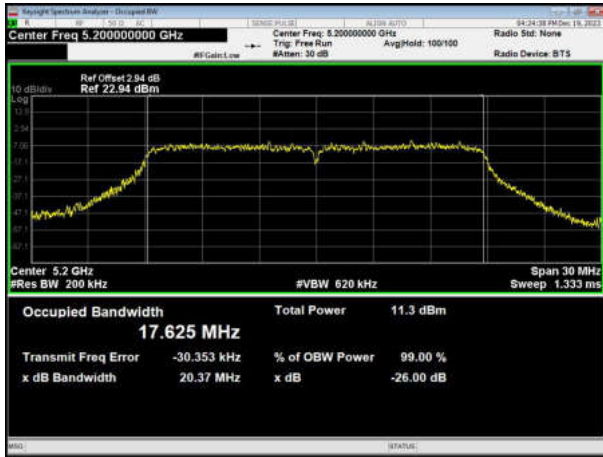


(802.11 ac40) 26dB Bandwidth plot on channel 46



(802.11 ac20) 26dB Bandwidth plot on channel 48

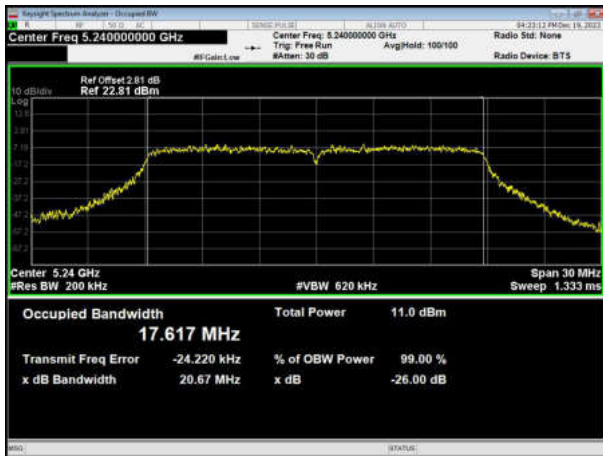

(802.11 ac80) 26dB Bandwidth plot on channel 42

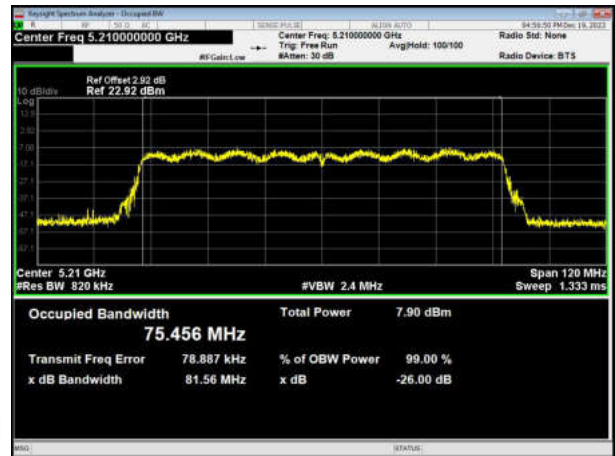



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 19V
Test Band :	5.8G		

5.8G				
Test Mode	Test Channel (MHz)	6dB Occupied Bandwidth (MHz)	Limit(KHz)	Result
802.11a	5745	16.33	>500	Pass
	5785	16.31		
	5825	16.34		
802.11n20	5745	16.99	>500	Pass
	5785	17.23		
	5825	17.17		
802.11n40	5755	35.11	>500	Pass
	5795	35.10		
802.11ac20	5745	16.85	>500	Pass
	5785	16.61		
	5825	16.67		
802.11ac40	5755	35.45	>500	Pass
	5795	35.20		
802.11ac80	5775	75.04	>500	Pass



### 5.8G Test plot

(802.11a) 6dB Bandwidth plot on channel 149



(802.11a) 6dB Bandwidth plot on channel 157



(802.11a) 6dB Bandwidth plot on channel 165





### 5.8G Test plot

(802.11n20) 6dB Bandwidth plot on channel 149




(802.11n40) 6dB Bandwidth plot on channel 151



(802.11n20) 6dB Bandwidth plot on channel 157



(802.11n40) 6dB Bandwidth plot on channel 159

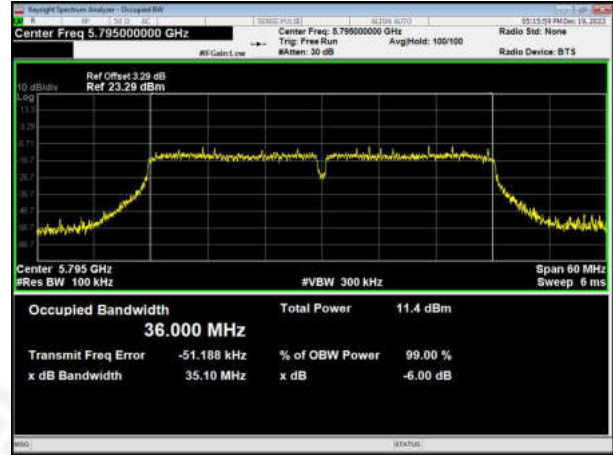

(802.11n20) 6dB Bandwidth plot on channel 165








### 5.8G Test plot

(802.11ac20) 6dB Bandwidth plot on channel 149

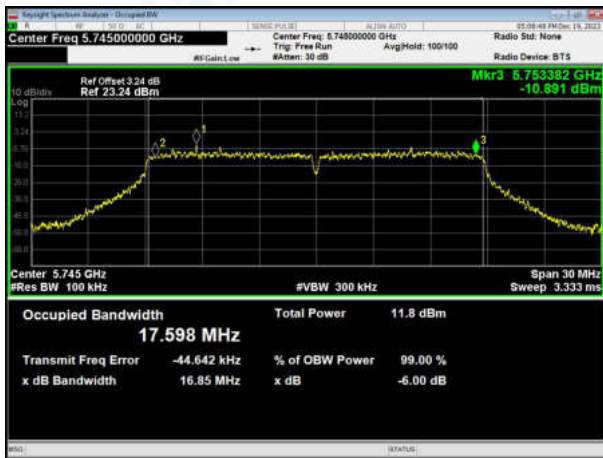


(802.11ac40) PSD plot on channel 151



(802.11ac20) 6dB Bandwidth plot on channel 157




(802.11ac40) PSD plot on channel 159

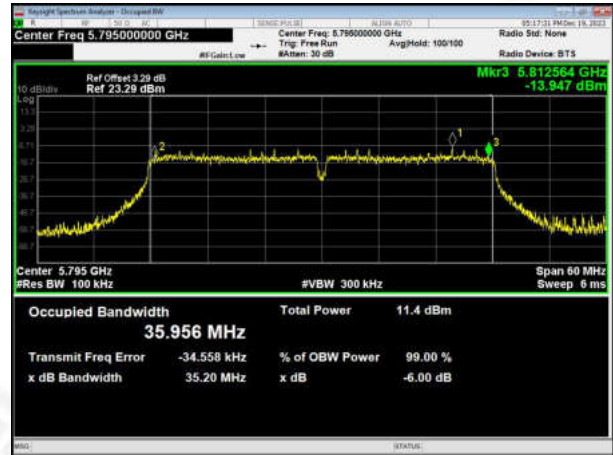

(802.11ac20) 6dB Bandwidth plot on channel 165



(802.11ac80) PSD plot on channel 155

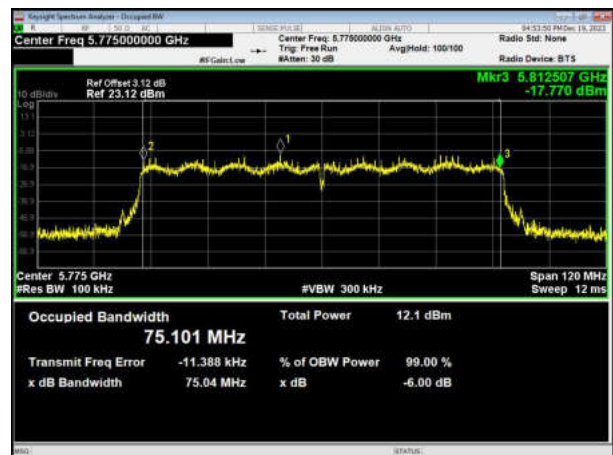



## 7. MAXIMUM CONDUCTED OUTPUT POWER

### 7.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

### 7.2 TEST PROCEDURE

The EUT was directly connected to the Power meter

#### 1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

#### 2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal. However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle  $\geq 98$  percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than  $\pm 2$  percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW  $\geq 3$  MHz.

(iv) Number of points in sweep  $\geq 2$  Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle  $< 98$  percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98$  percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.



(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP



### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



## 7.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 19V
Test Band :	5.2G		

802.11 a Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH36	5180	6.212	2.40	8.612	23.98	Pass
CH40	5200	5.561	2.40	7.961	23.98	Pass
CH48	5240	5.674	2.40	8.074	23.98	Pass
802.11 n20 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH36	5180	5.569	2.54	8.109	23.98	Pass
CH40	5200	4.862	2.54	7.402	23.98	Pass
CH48	5240	5.381	2.54	7.921	23.98	Pass
802.11 n40 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH38	5190	3.095	4.13	7.225	23.98	Pass
CH46	5230	3.155	4.13	7.285	23.98	Pass
802.11 ac20 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH36	5180	4.512	2.53	7.042	23.98	Pass
CH40	5200	4.551	2.53	7.081	23.98	Pass
CH48	5240	5.326	2.53	7.856	23.98	Pass
802.11 ac40 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH38	5190	3.133	4.11	7.243	23.98	Pass
CH46	5230	2.963	4.11	7.073	23.98	Pass
802.11 ac80 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH42	5210	1.299	6.23	7.529	23.98	Pass

Note: duty cycle Factor see page 86.



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 19V
Test Band :	5.8G		

802.11 a Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH149	5745	4.703	2.53	7.233	30	Pass
CH157	5785	6.206	2.53	8.736	30	Pass
CH165	5825	4.578	2.53	7.108	30	Pass
802.11 n20 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH149	5745	6.057	2.40	8.457	30	Pass
CH157	5785	5.625	2.40	8.025	30	Pass
CH165	5825	5.224	2.40	7.624	30	Pass
802.11 n40 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH151	5755	3.485	4.14	7.625	30	Pass
CH159	5795	3.544	4.14	7.684	30	Pass
802.11 ac20 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH149	5745	5.295	2.52	7.815	30	Pass
CH157	5785	5.428	2.52	7.948	30	Pass
CH165	5825	5.055	2.52	7.575	30	Pass
802.11 ac40 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH151	5755	3.047	4.11	7.157	30	Pass
CH159	5795	3.785	4.11	7.895	30	Pass
802.11 ac80 Mode						
Test Channel	Frequency (MHz)	Output power (dBm)	duty cycle Factor (dB)	Total power (dBm)	Limit (dBm)	Result
CH155	5775	1.364	6.21	7.574	30	Pass

Note: duty cycle Factor see page 90.



## 8. OUT OF BAND EMISSIONS

### 8.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(2)

(i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

### 8.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP



### 8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




8.6 TEST RESULTS


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 19V
Test band :	5.2G	Antenna gain :	3.79dBi

5.180~5.240 GHz


(802.11a) Band Edge, Left Side

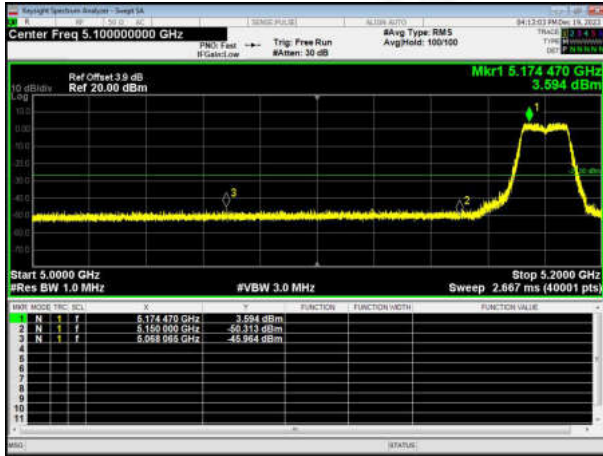


(802.11a) Band Edge, Right Side

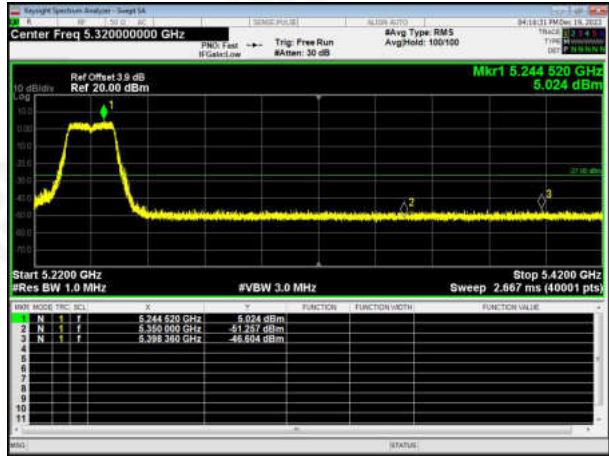


(802.11n20) Band Edge, Left Side

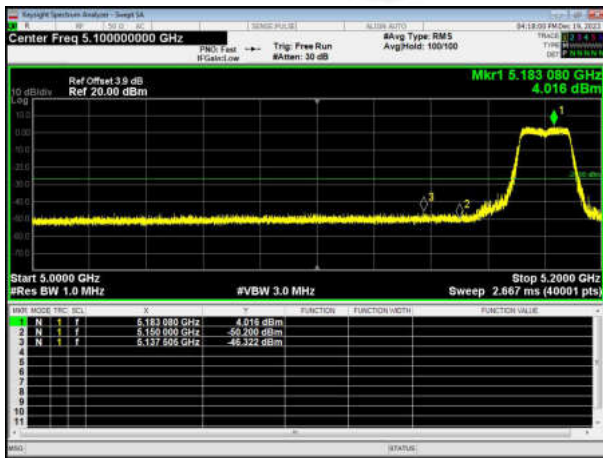


(802.11n20) Band Edge, Right Side

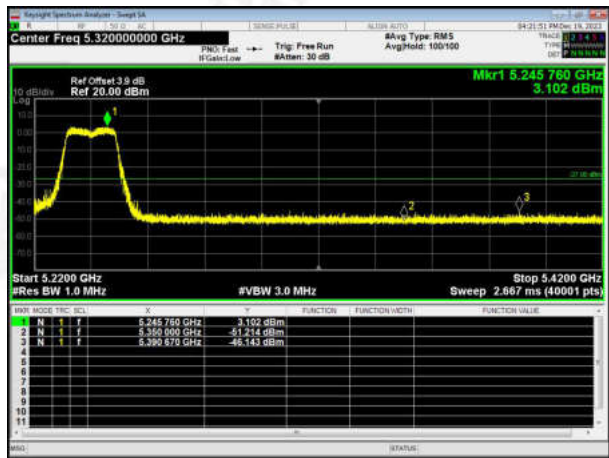

(802.11n40) Band Edge, Left Side

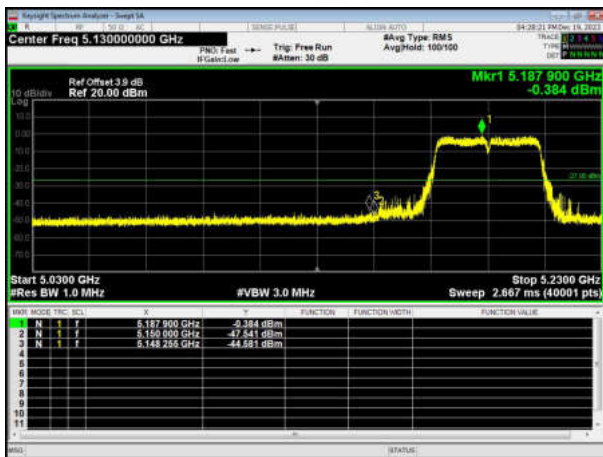


(802.11n40) Band Edge, Right Side

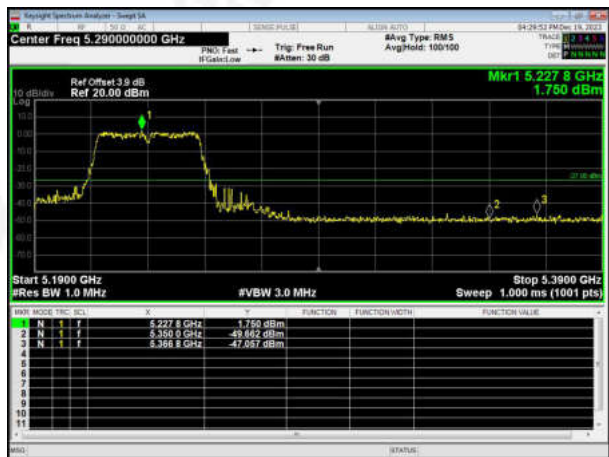





(802.11ac20) Band Edge, Left Side

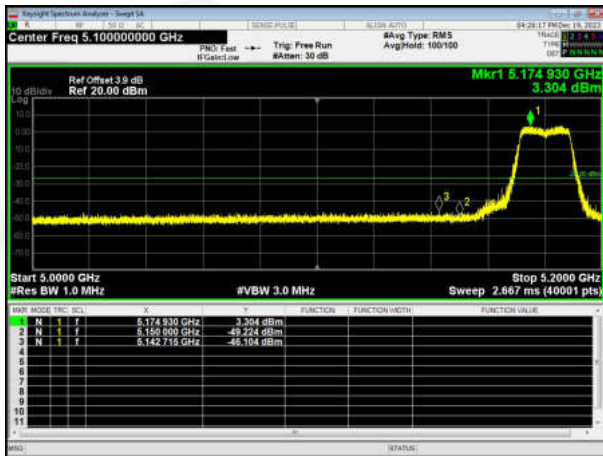


(802.11ac20) Band Edge, Right Side

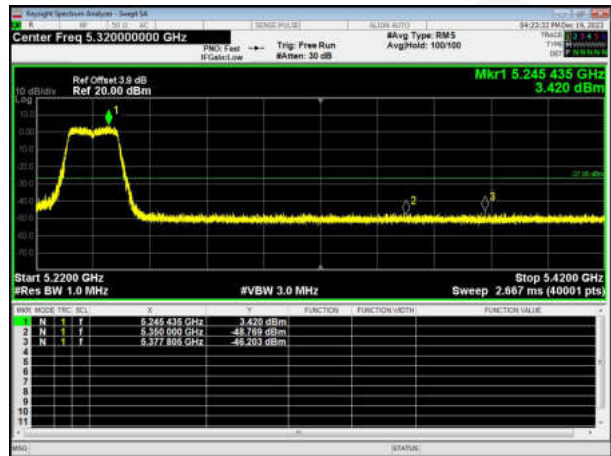


(802.11ac40) Band Edge, Left Side

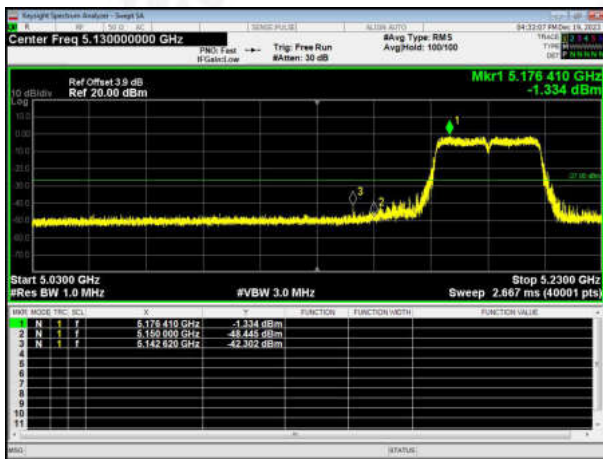

(802.11ac40) Band Edge, Right Side

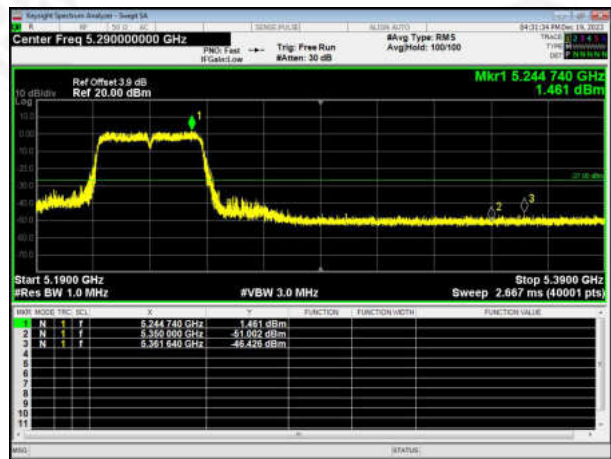

(802.11ac80) Band Edge, Left Side

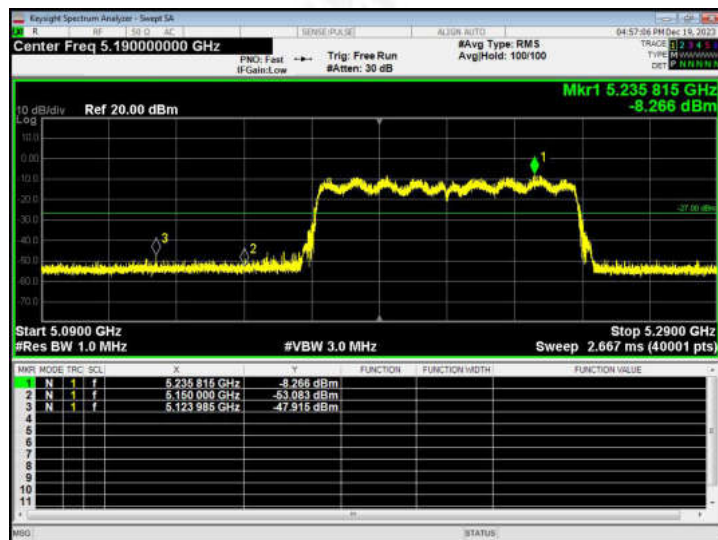







Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 19V
Test band :	5.8G	Antenna gain :	3.50dBi

**5.745~5.825 GHz**



(802.11a) Band Edge, Left Side

(802.11a) Band Edge, Right Side

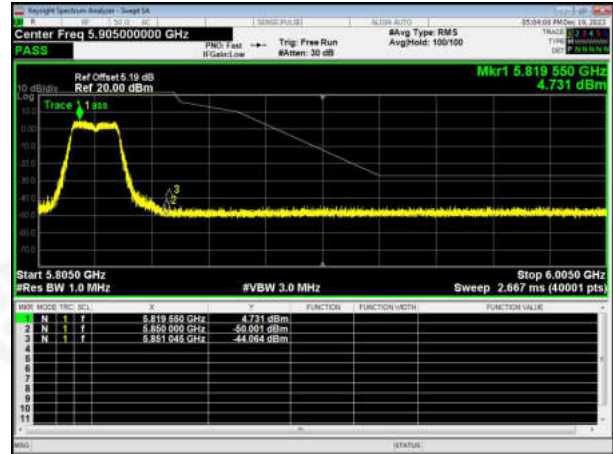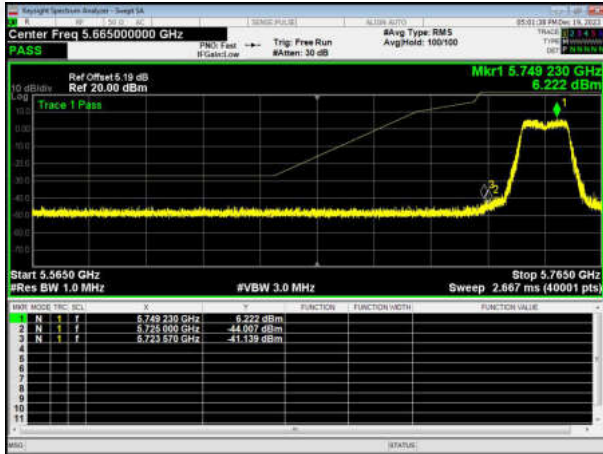



(802.11n20) Band Edge, Left Side

(802.11n20) Band Edge, Right Side

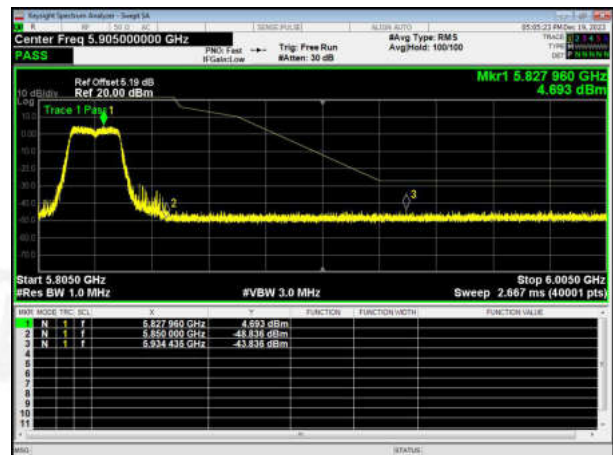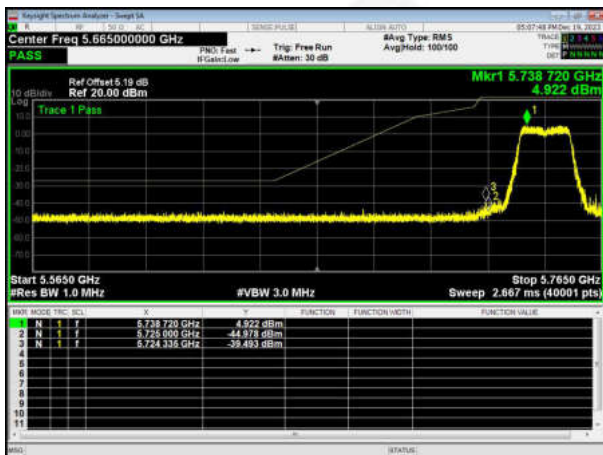


(802.11n40) Band Edge, Left Side

(802.11n40) Band Edge, Right Side

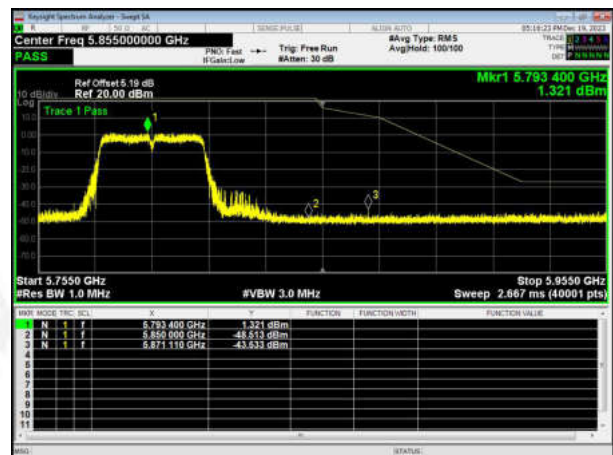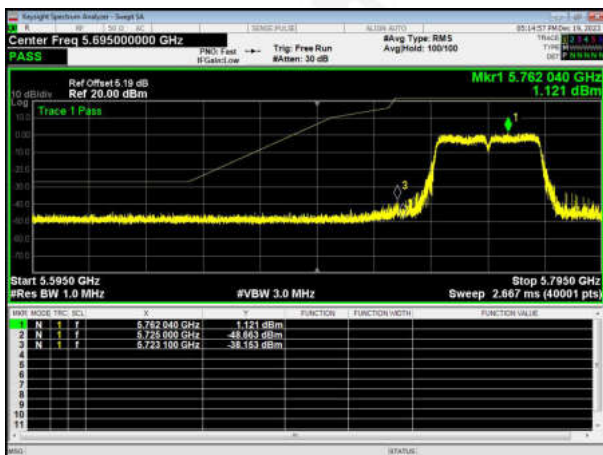





(802.11ac20) Band Edge, Left Side

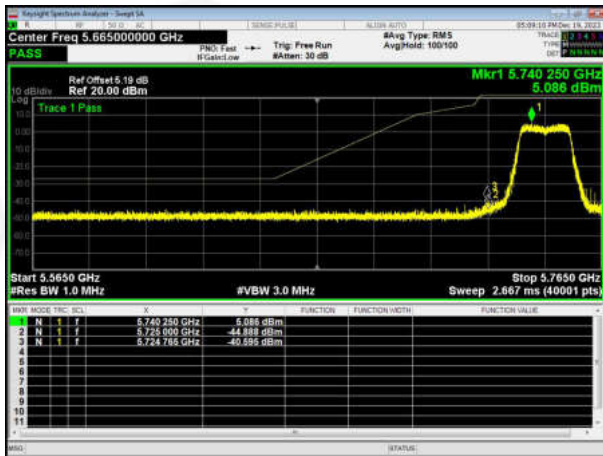


(802.11ac20) Band Edge, Right Side

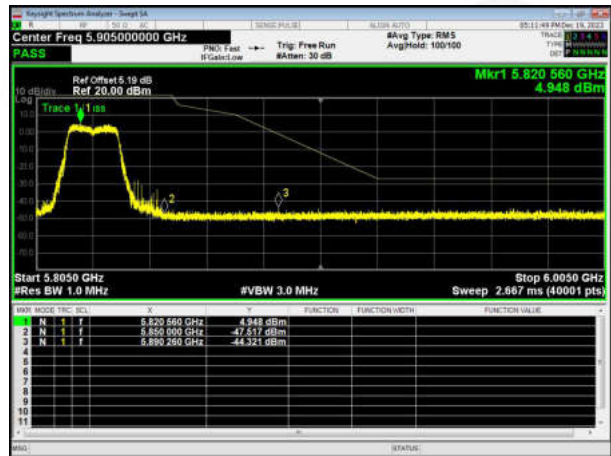


(802.11ac40) Band Edge, Left Side

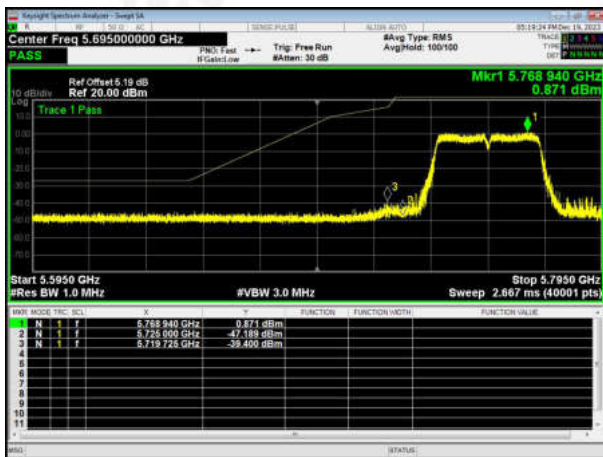

(802.11ac40) Band Edge, Right Side

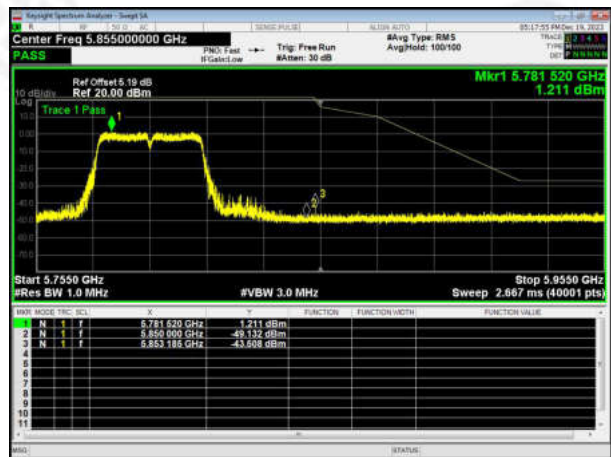

(802.11ac80) Band Edge, Left Side

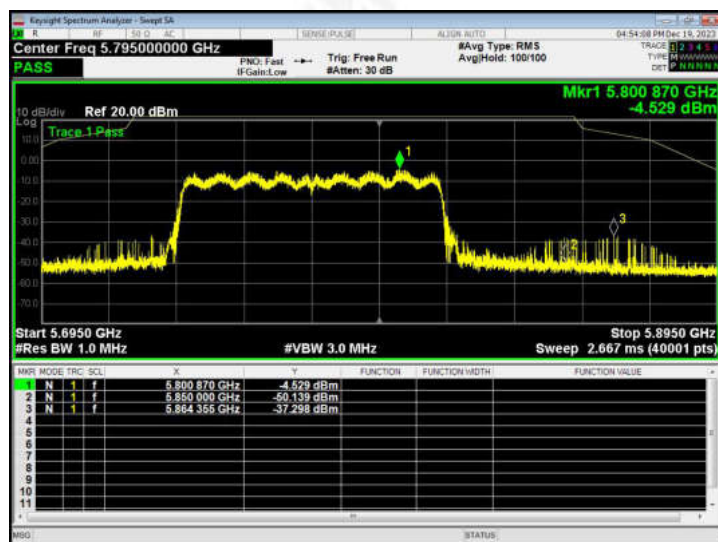



## 9.SPURIOUS RF CONDUCTED EMISSIONS

### 9.1 CONFORMANCE LIMIT

Frequency Band (MHz)	Limit
5150 - 5250	Outside of the 5.15-5.35 GHz band: e.i.r.p. -27 dBm
5250 - 5350	Outside of the 5.15-5.35 GHz band: e.i.r.p. -27 dBm
5470 - 5725	Outside of the 5.47-5.725 GHz band: e.i.r.p. -27 dBm
5725 - 5850	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

### 9.2 MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.

### 9.3 TEST SETUP



### 9.4 TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=1MHz and VBW= 3MHz to measure the peak field strength, and measure frequency range from 30MHz to 26.5GHz.


### 9.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 19V
Test band :	5.2G & 5.8G		
Remark:	The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. And above 26.5GHz of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.		




### 5.2G Test Plot


802.11a on channel 36

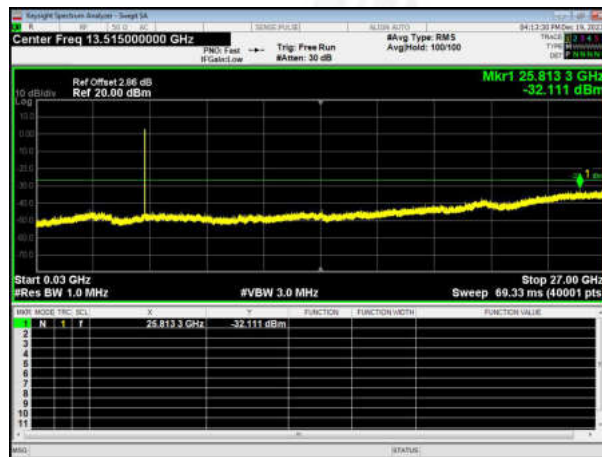

802.11a on channel 40

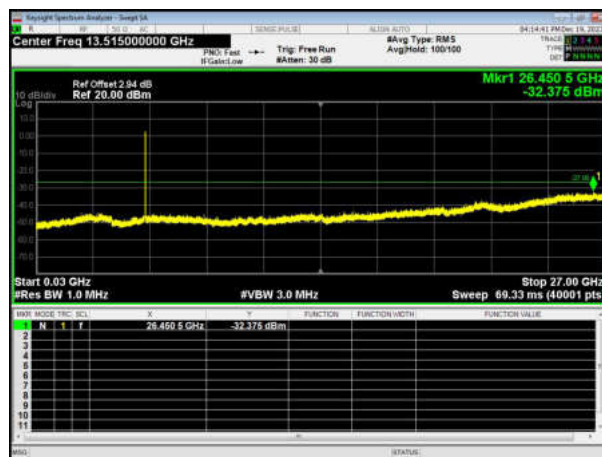


802.11a on channel 48

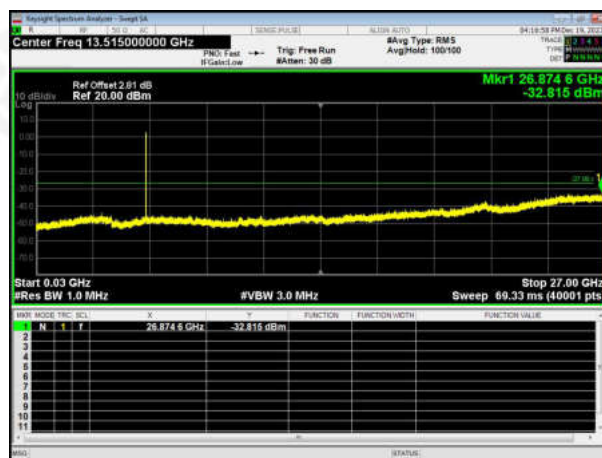




### 5.2G Test Plot


802.11n20 on channel 36

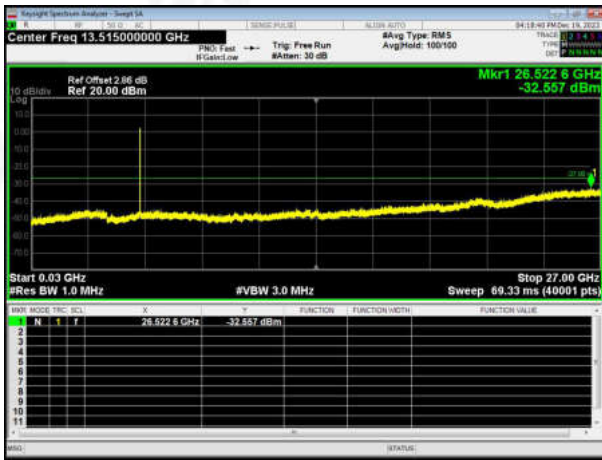


802.11n40 on channel 38

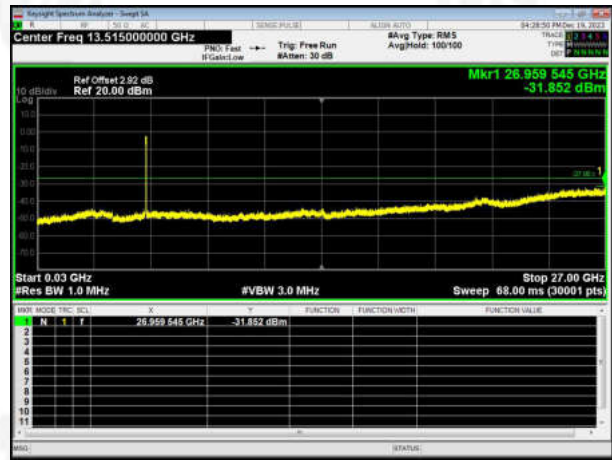


802.11n20 on channel 40

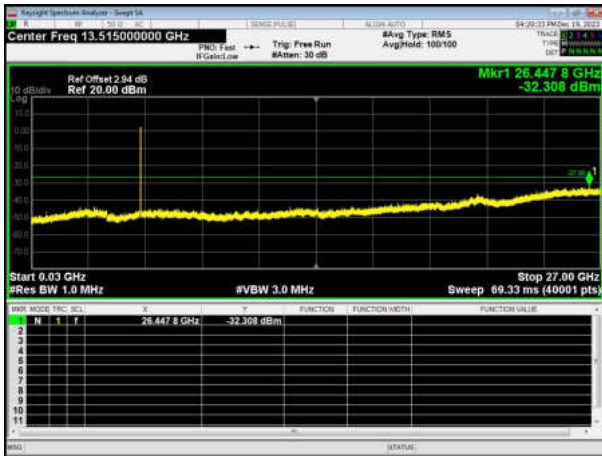

802.11n40 on channel 46

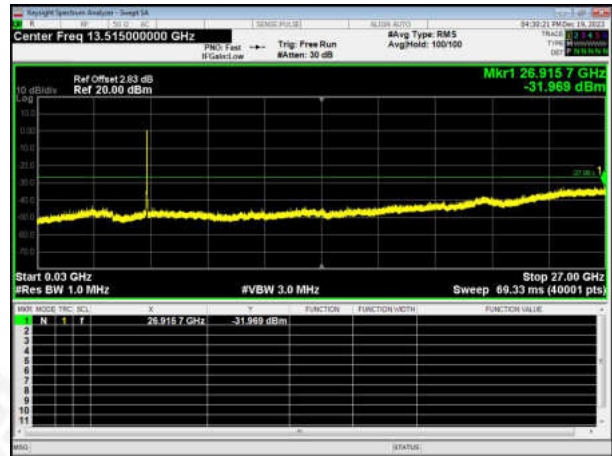


802.11n20 on channel 48

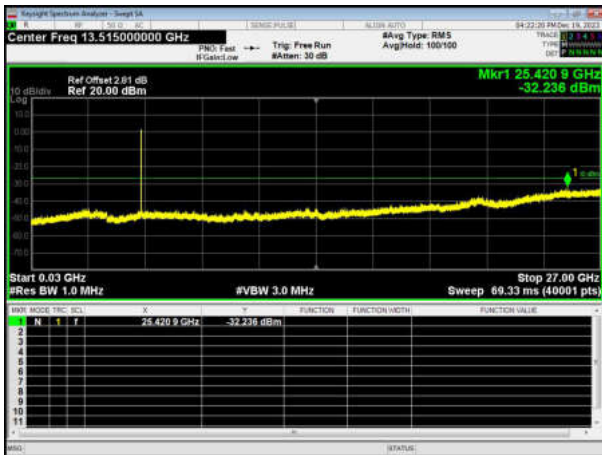




### 5.2G Test Plot


802.11ac20 on channel 36

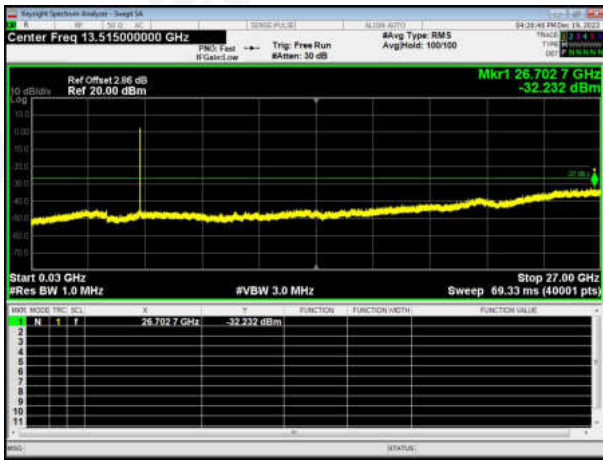


802.11ac40 on channel 46

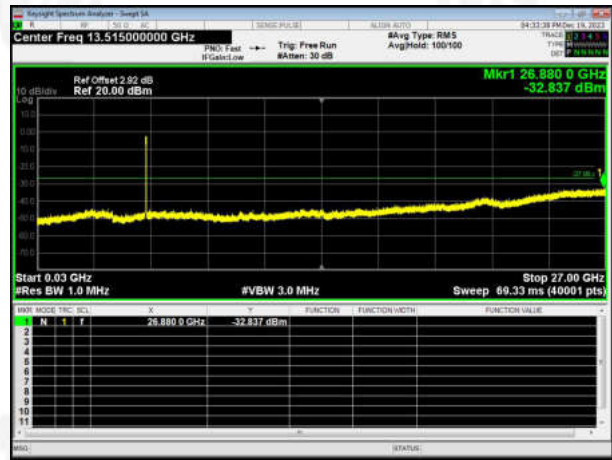


802.11ac20 on channel 40

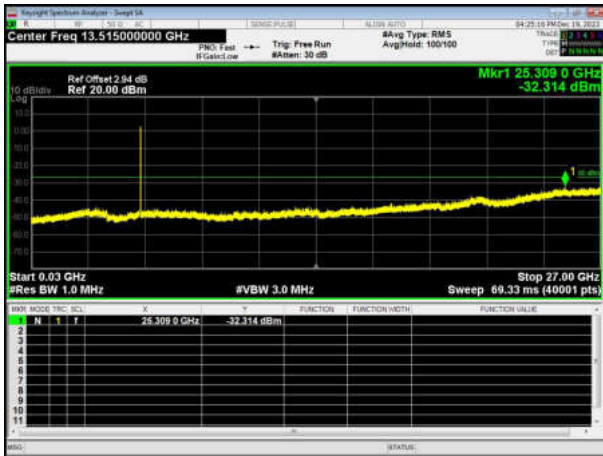


802.11ac40 on channel 46

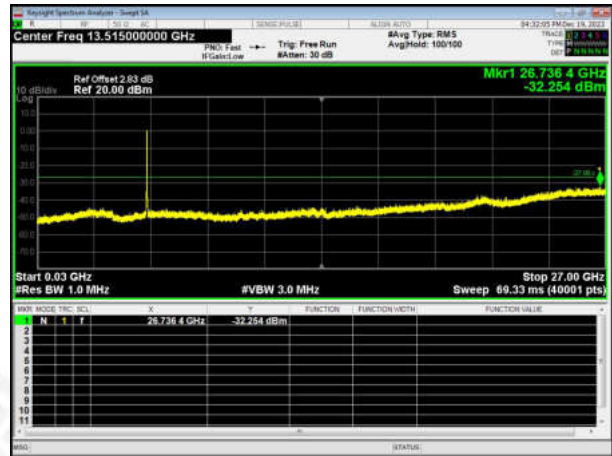

802.11ac20 on channel 48

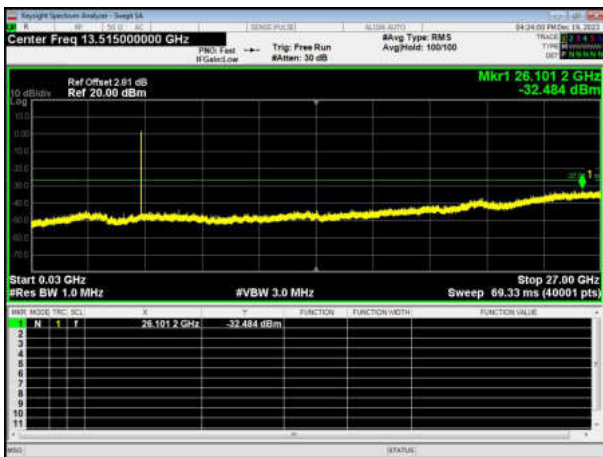


802.11ac80 on channel 42

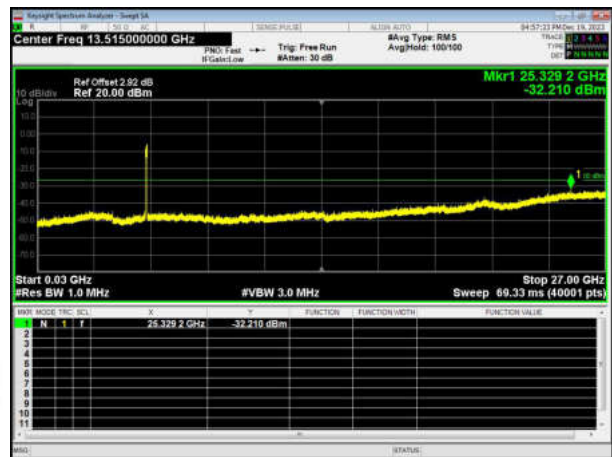




### 5.8G Test Plot


802.11a on channel 149

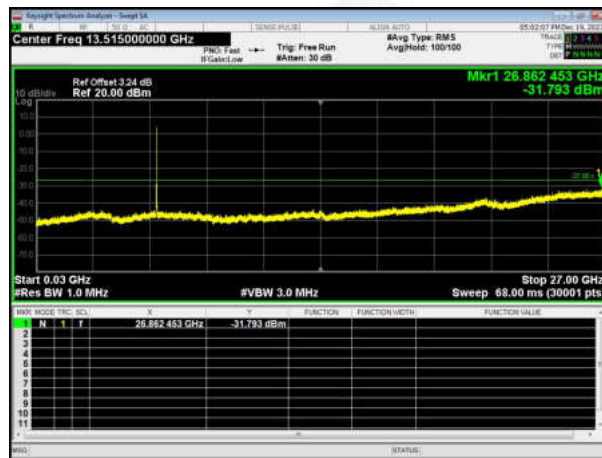

802.11a on channel 157

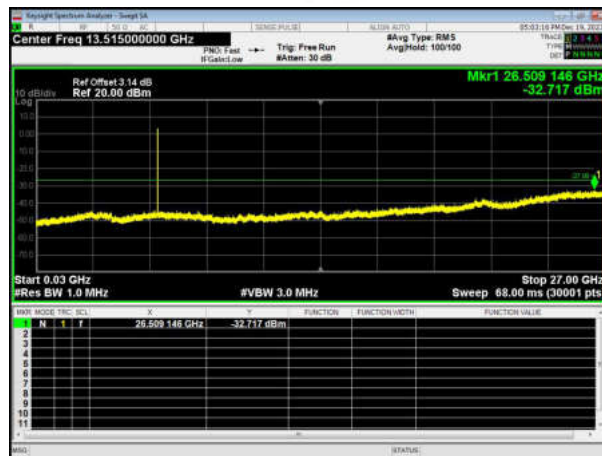



802.11a on channel 165

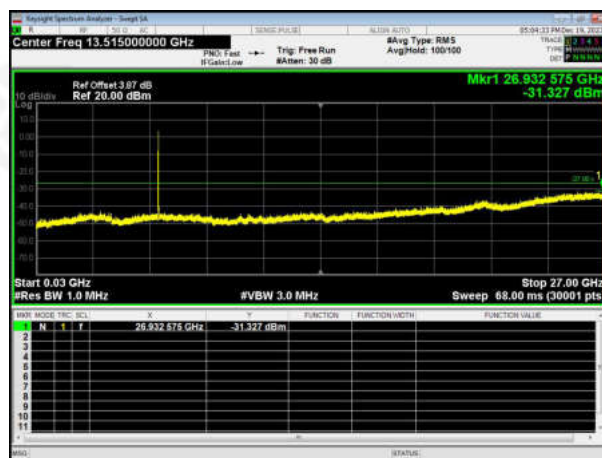





### 5.8G Test Plot


802.11n20 on channel 149

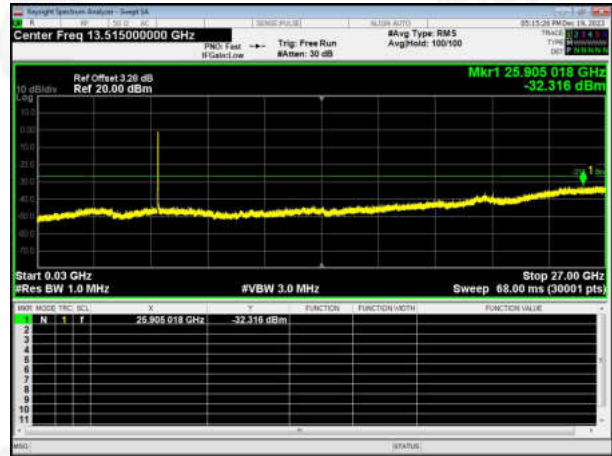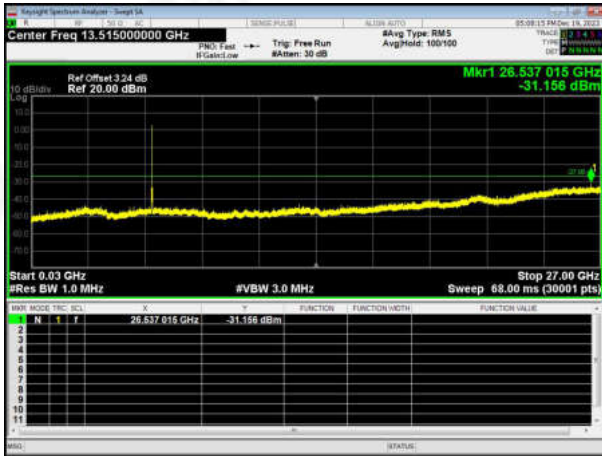

802.11n20 on channel 157

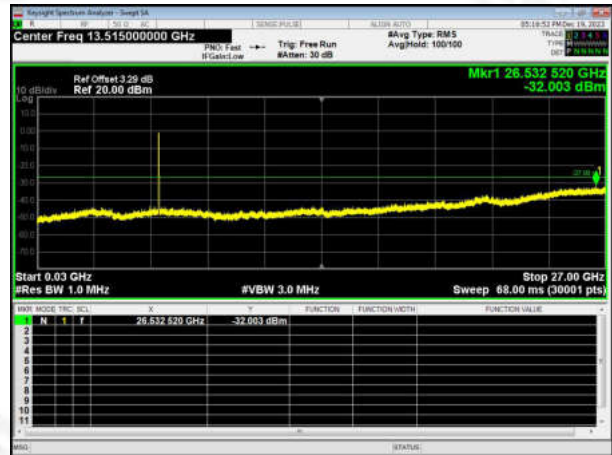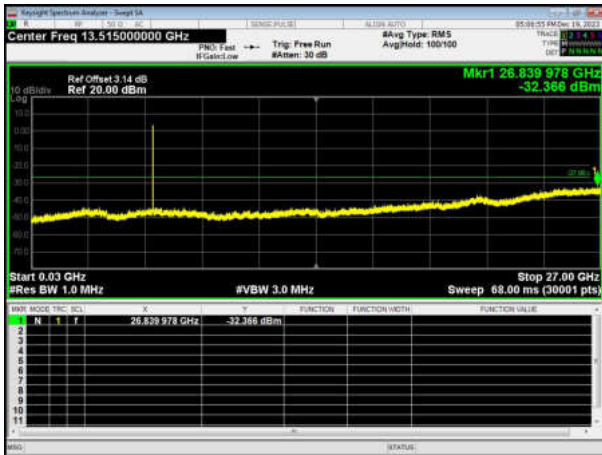

802.11n20 on channel 165

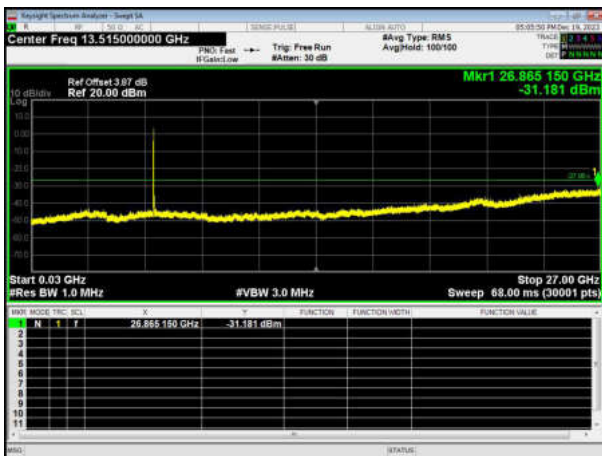







### 5.8G Test Plot


802.11ac20 on channel 149

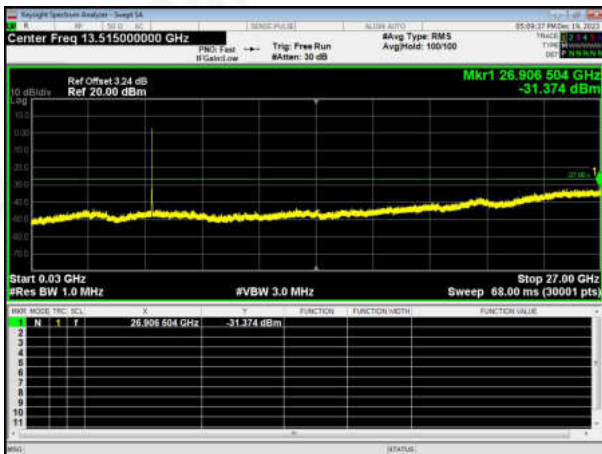


802.11ac40 on channel 159

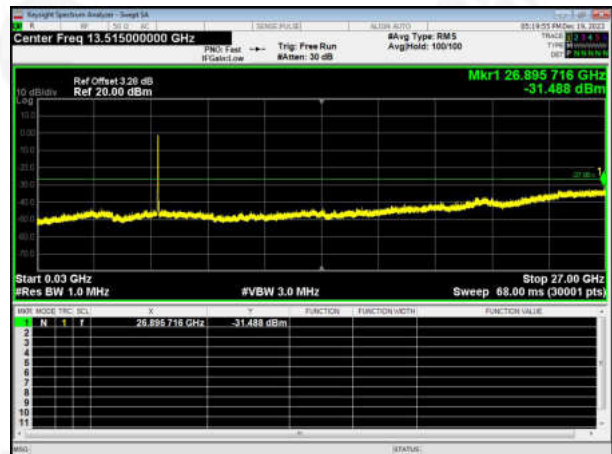


802.11ac20 on channel 157

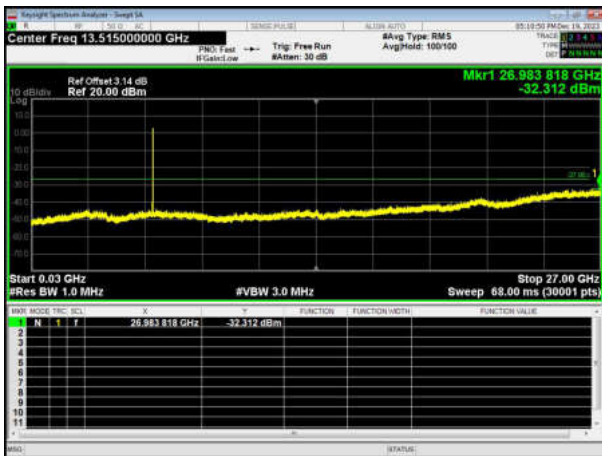


802.11ac40 on channel 159

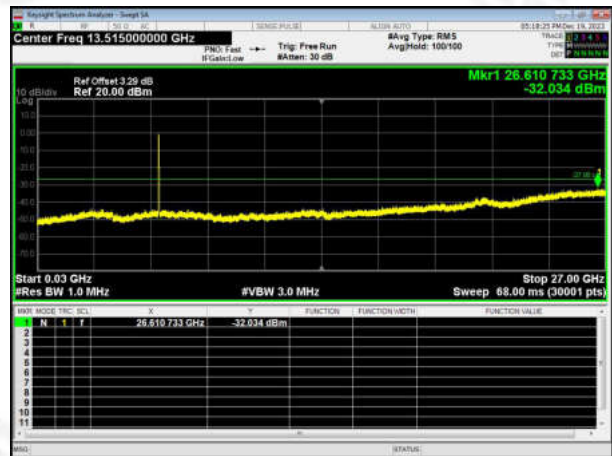

802.11ac20 on channel 165

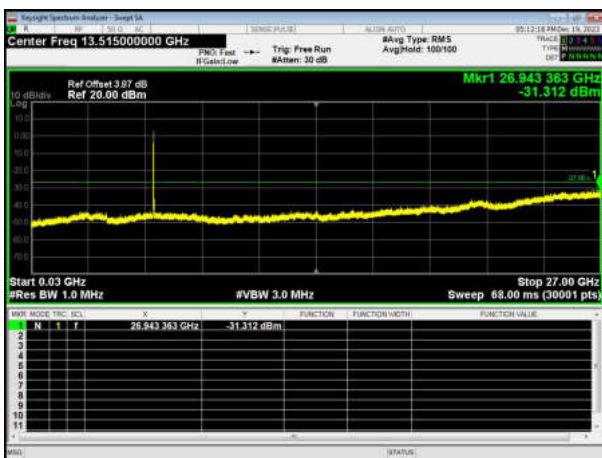

802.11ac40 on channel 155

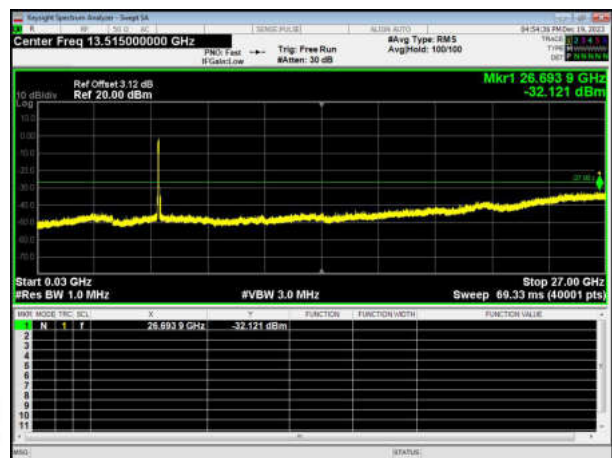



## 10. Frequency Stability Measurement

### 10.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 10.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is  $-20^\circ\text{C} \sim 70^\circ\text{C}$ .

### 10.3 TEST SETUP LAYOUT



### 10.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

### 10.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 19V
Test Band :	5.2G & 5.8G		
Note: All channels have been tested, and only the worst test data is recorded in this report.			



**5.2G:**

802.11a

Reference Frequency(Middle Channel): 5180MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	19	56	0.01002
40	19	45	0.00766
30	19	33	0.00616
20	19	28	0.00459
10	19	24	0.00427
0	19	15	0.00279
-10	19	14	0.00271
-20	19	24	0.00408
-30	19	37	0.00630

802.11 n20

Reference Frequency(Middle Channel): 5180 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	19	62	0.01121
40	19	52	0.00918
30	19	42	0.00782
20	19	32	0.00587
10	19	23	0.00432
0	19	26	0.00483
-10	19	22	0.00414
-20	19	36	0.00656
-30	19	40	0.00787



## 802.11n40

Reference Frequency(Middle Channel): 5190MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	19	61	0.01087
40	19	52	0.00902
30	19	43	0.00779
20	19	44	0.00793
10	19	34	0.00621
0	19	22	0.00414
-10	19	36	0.00656
-20	19	43	0.00777
-30	19	51	0.00914

## 802.11ac20

Reference Frequency(Middle Channel): 5180MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	19	57	0.00919
40	19	43	0.00694
30	19	31	0.00523
20	19	25	0.00382
10	19	24	0.00348
0	19	13	0.00171
-10	19	14	0.00193
-20	19	20	0.00328
-30	19	33	0.00527



802.11 ac40

Reference Frequency(Middle Channel): 5190 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	19	65	0.01058
40	19	52	0.00851
30	19	44	0.00707
20	19	33	0.00521
10	19	25	0.00362
0	19	27	0.00413
-10	19	23	0.00348
-20	19	38	0.00591
-30	19	45	0.00713

802.11ac80

Reference Frequency(Middle Channel): 5210MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	19	63	0.01057
40	19	52	0.00866
30	19	43	0.00711
20	19	41	0.00676
10	19	36	0.00589
0	19	32	0.0052
-10	19	34	0.00555
-20	19	43	0.00711
-30	19	52	0.00851



**So, Frequency Stability Versus Input Voltage is:**

802.11a

Reference Frequency(Middle Channel): 5180 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
50	19	56	0.01002
40	19	45	0.00766
-30	19	33	0.00616

802.11n20

Reference Frequency(Middle Channel): 5180 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
50	19	62	0.01121
40	19	52	0.00918
-30	19	42	0.00782

802.11n40

Reference Frequency(Middle Channel): 5190 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
50	19	61	0.01087
40	19	52	0.00902
-30	19	51	0.00914

802.11ac20

Reference Frequency(Middle Channel): 5180 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
50	19	57	0.00919
40	19	43	0.00694
-30	19	33	0.00527



## 802.11ac40

Reference Frequency(Middle Channel): 5190 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
50	19	65	0.01058
40	19	52	0.00851
-30	19	45	0.00713

## 802.11ac80

Reference Frequency(Middle Channel): 5210 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
50	19	63	0.01057
40	19	52	0.00866
-30	19	52	0.00851



**5.8G:**

802.11a

Reference Frequency(Middle Channel): 5745MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	19	46	0.00815
40	19	27	0.00757
30	19	36	0.00462
20	19	23	0.00419
10	19	14	0.00306
0	19	16	0.00324
-10	19	13	0.00342
-20	19	27	0.00443
-30	19	38	0.00632

802.11n20

Reference Frequency(Middle Channel): 5745MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	19	42	0.00658
40	19	24	0.00534
30	19	32	0.00385
20	19	24	0.00347
10	19	13	0.00157
0	19	12	0.00139
-10	19	13	0.00157
-20	19	21	0.00295
-30	19	32	0.00543





## 802.11n40

Reference Frequency(Middle Channel): 5755MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	19	62	0.00953
40	19	54	0.00801
30	19	42	0.00725
20	19	44	0.00759
10	19	34	0.00587
0	19	32	0.00552
-10	19	34	0.00587
-20	19	42	0.00725
-30	19	51	0.00884

## 802.11ac20

Reference Frequency(Middle Channel): 5745 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	19	43	0.00709
40	19	51	0.00648
30	19	23	0.00375
20	19	26	0.00515
10	19	23	0.00374
0	19	26	0.00415
-10	19	22	0.00346
-20	19	36	0.00588
-30	19	26	0.00462



## 802.11ac40

Reference Frequency(Middle Channel): 5755MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	19	60	0.00675
40	19	55	0.00614
30	19	47	0.00341
20	19	45	0.00481
10	19	32	0.0034
0	19	26	0.00381
-10	19	38	0.00312
-20	19	43	0.00554
-30	19	54	0.00428

## 802.11ac80

Reference Frequency(Middle Channel): 5775MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	19	52	0.00866
40	19	41	0.00705
30	19	43	0.00711
20	19	41	0.00676
10	19	36	0.00589
0	19	32	0.0052
-10	19	34	0.00555
-20	19	32	0.0052
-30	19	52	0.00866

**So, Frequency Stability Versus Input Voltage is:**

802.11a

Reference Frequency(Middle Channel): 5745 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
50	19	46	0.00815
40	19	27	0.00757
-30	19	38	0.00632

802.11n20

Reference Frequency(Middle Channel): 5745 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
50	19	42	0.00658
40	19	24	0.00534
-30	19	32	0.00543

802.11n40

Reference Frequency(Middle Channel): 5755 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
50	19	62	0.00953
40	19	54	0.00801
-30	19	51	0.00884

802.11ac20

Reference Frequency(Middle Channel): 5745 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
50	19	43	0.00709
40	19	51	0.00648
-20	19	36	0.00588



## 802.11ac40

Reference Frequency(Middle Channel): 5755 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
50	19	60	0.00675
40	19	55	0.00614
-20	19	43	0.00554

## 802.11ac80

Reference Frequency(Middle Channel): 5775 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
50	19	52	0.00866
40	19	41	0.00705
-30	19	52	0.00866



## 11. DUTY CYCLE

### 11.1 APPLIED PROCEDURES / LIMIT

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
  - 1) Set the center frequency of the instrument to the center frequency of the transmission.
  - 2) Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value.
  - 3) Set  $VBW \geq RBW$ . Set detector = peak or average.
  - 4) The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration  $T$  exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)

### 11.2 DEVIATION FROM STANDARD

No deviation.

### 11.3 TEST SETUP






### 11.4 TEST RESULTS


5.2G				
Mode	Frequency (MHz)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Result
802.11a	5180	55.81	2.53	Pass
802.11n20	5180	57.53	2.40	Pass
802.11n40	5190	38.52	4.14	Pass
802.11ac20	5180	55.92	2.52	Pass
802.11ac40	5190	38.78	4.11	Pass
802.11ac80	5210	23.92	6.21	Pass



802.11a

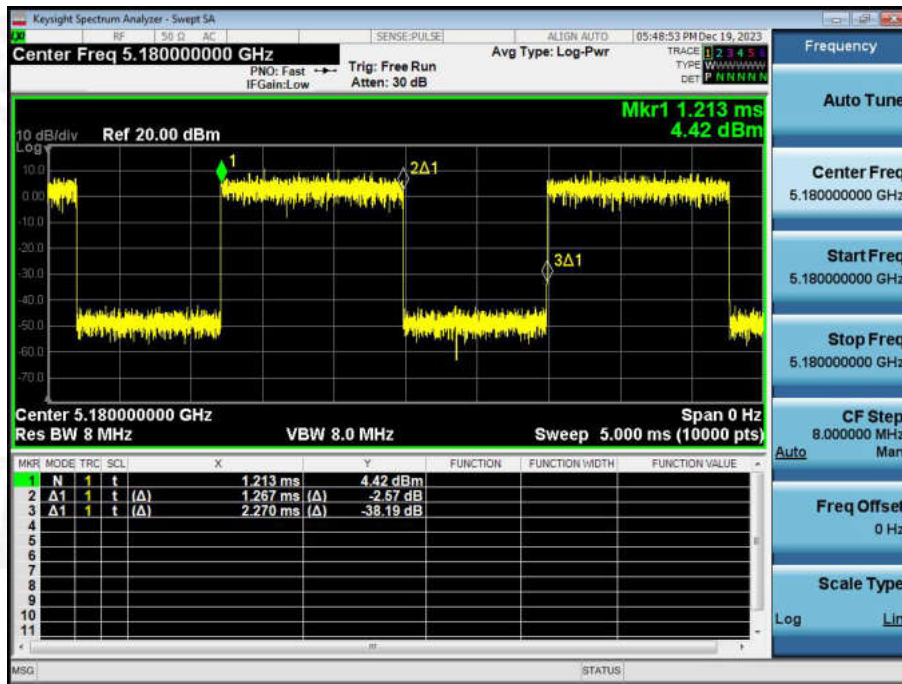


802.11n20

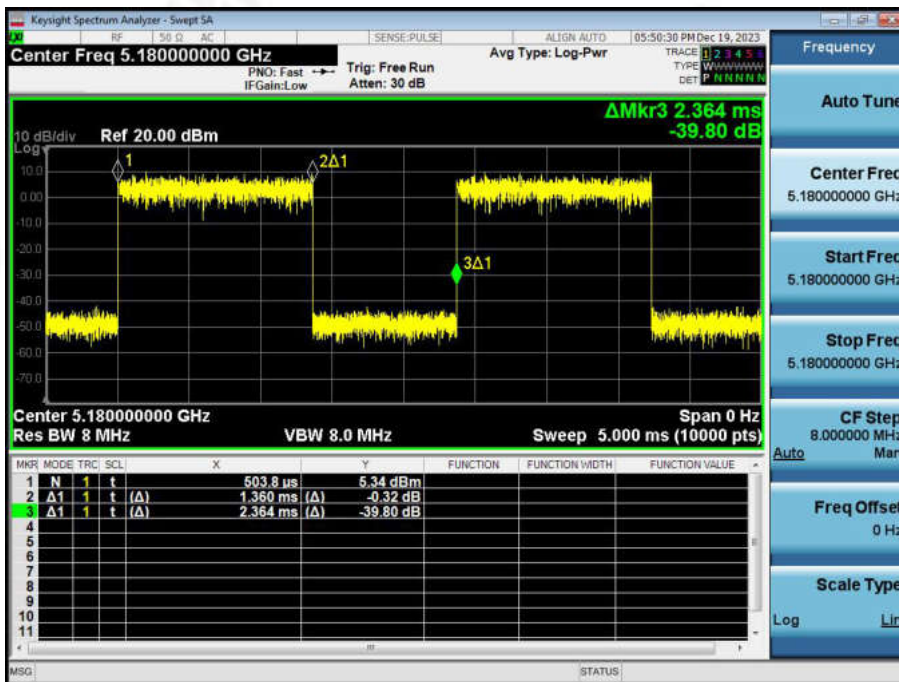




802.11n40

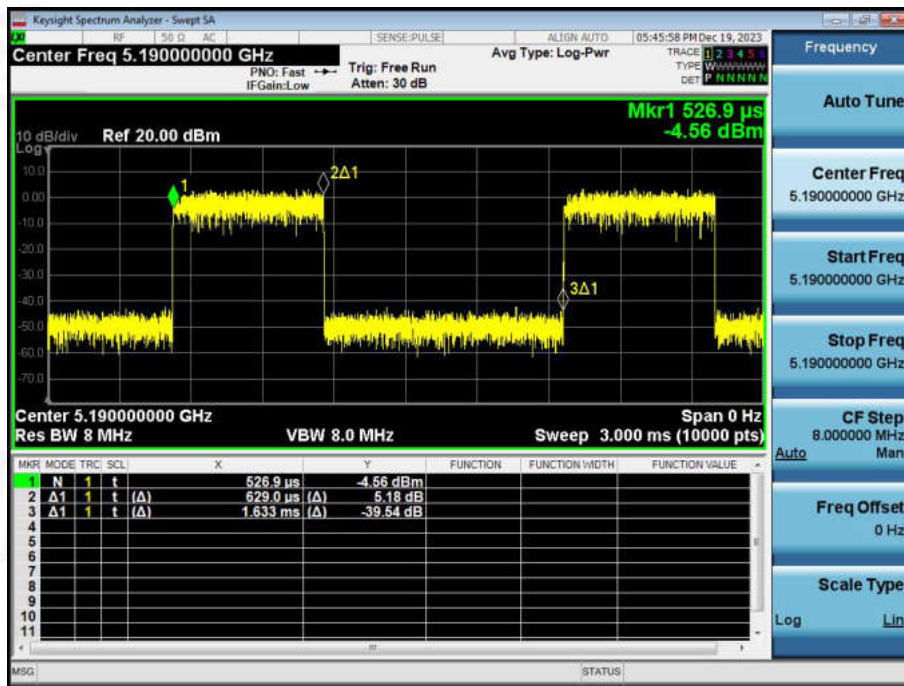


802.11ac20

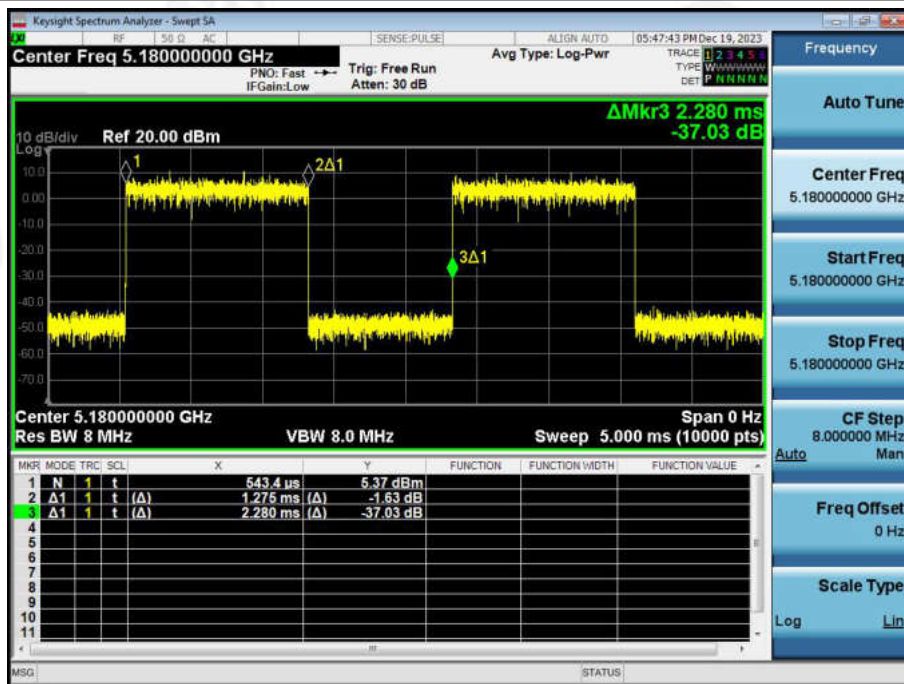






802.11ac40

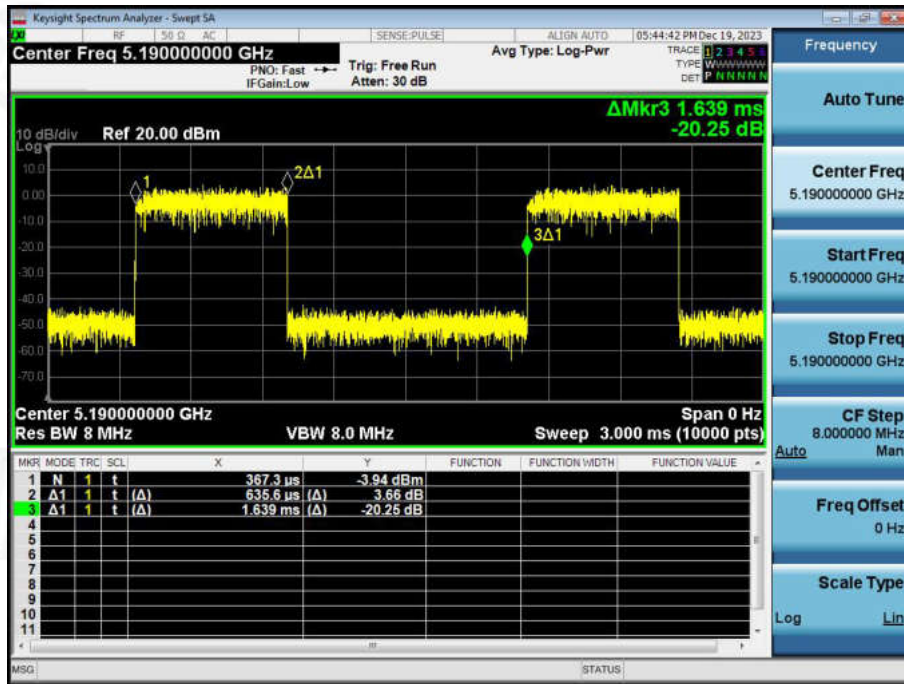

802.11ac80

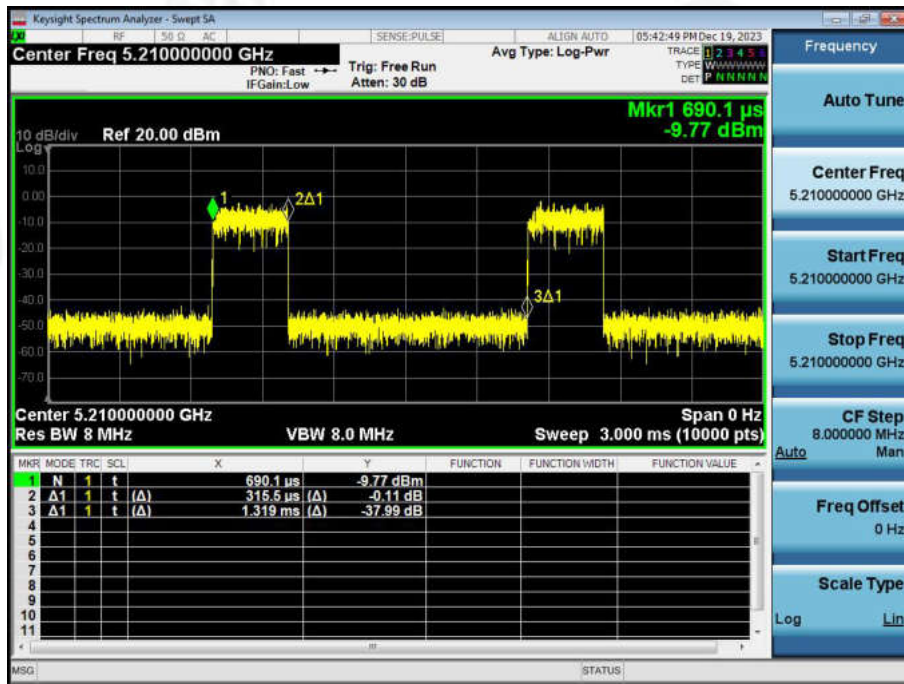

Note: All channel have been tested, and the report only reflects the worst case data.

Duty Cycle= Ton /Total\*100%


Duty Cycle Correction Factor = 10log (1/Duty Cycle)




5.8G				
Mode	Frequency (MHz)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Result
802.11a	5745	57.51	2.40	Pass
802.11n20	5745	55.71	2.54	Pass
802.11n40	5755	38.64	4.13	Pass
802.11ac20	5745	55.87	2.53	Pass
802.11ac40	5755	38.79	4.11	Pass
802.11ac80	5775	23.85	6.23	Pass



802.11a

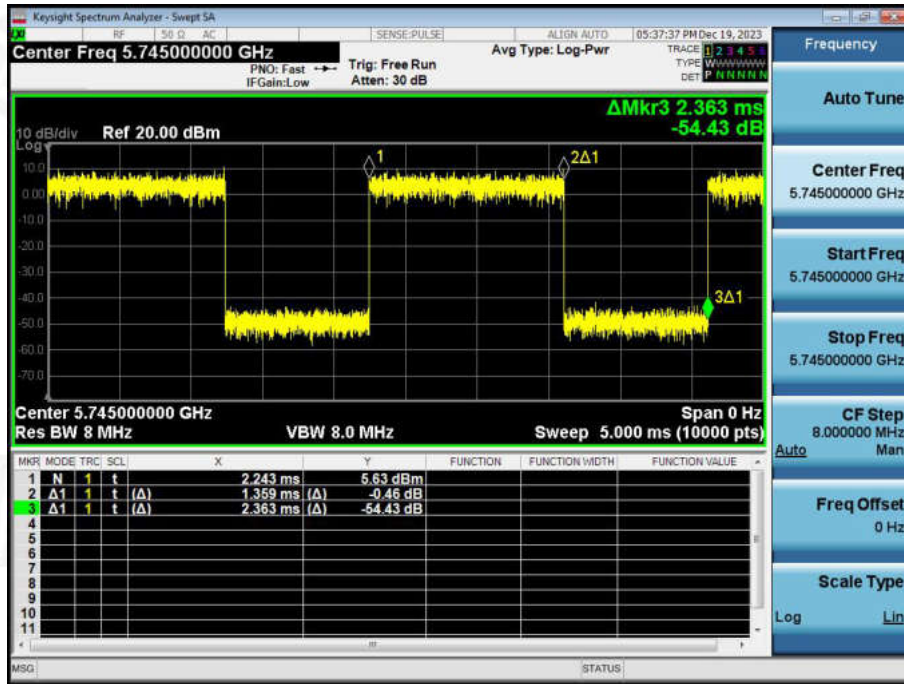


802.11n20

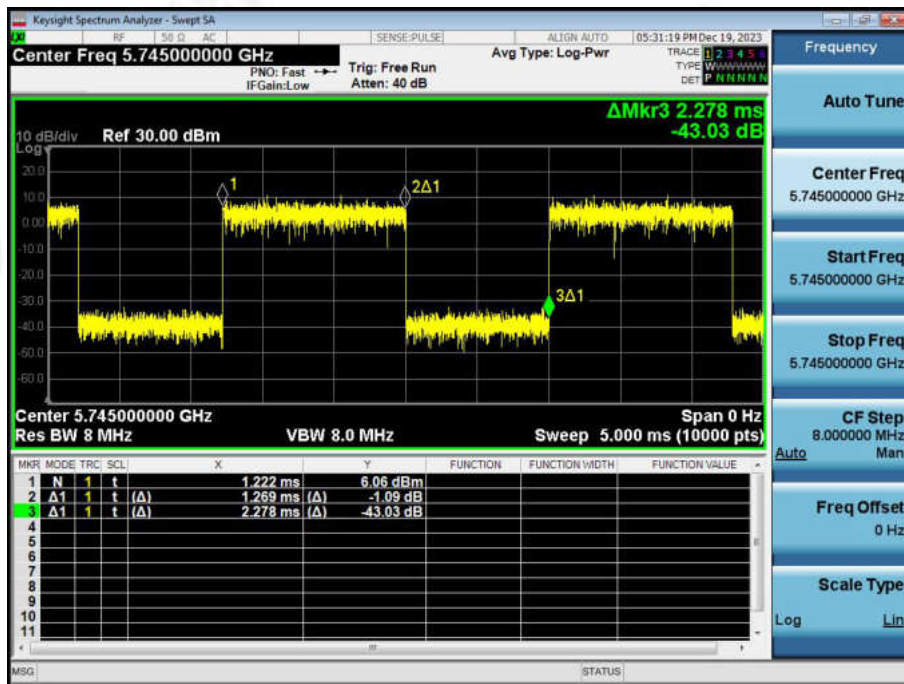




802.11n40

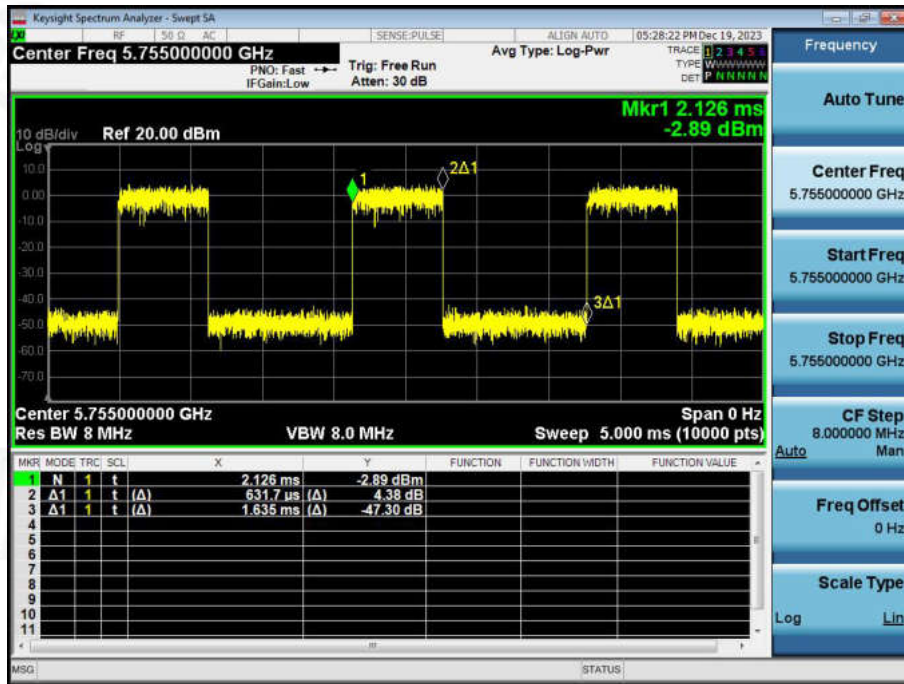


802.11ac20

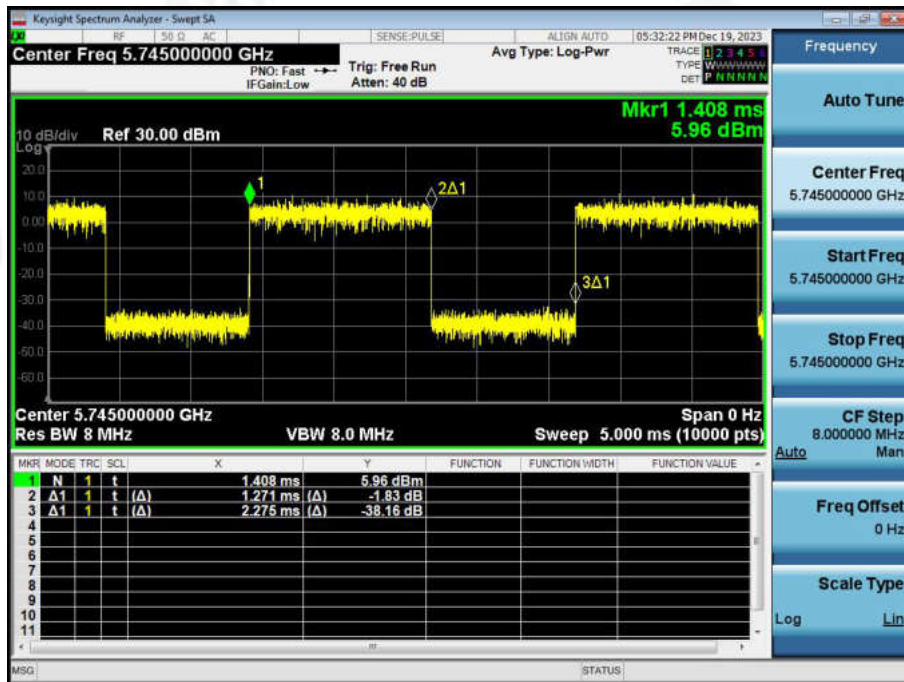




802.11ac40

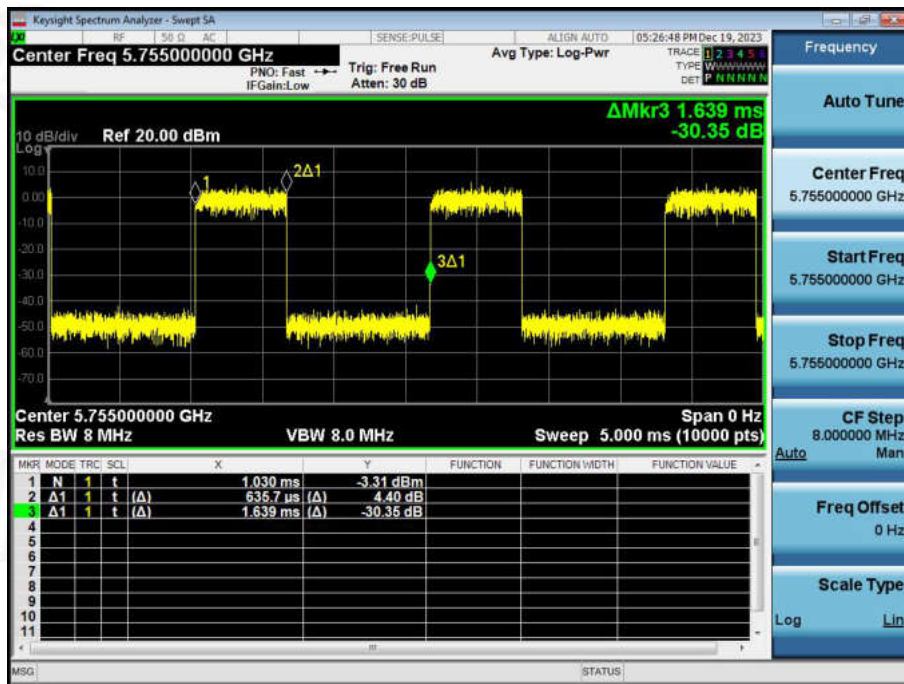

802.11ac80

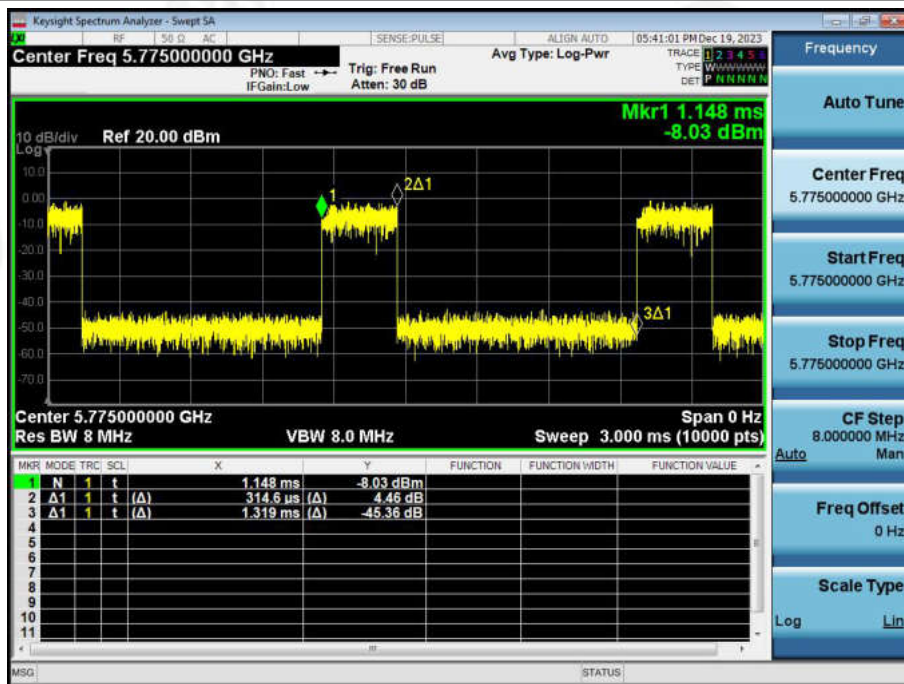

Note: All channel have been tested, and the report only reflects the worst case data.

Duty Cycle= Ton /Total\*100%

Duty Cycle Correction Factor = 10log (1/Duty Cycle)



## 12.ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is FPC Antenna1, the best case gain of the antenna is 5.2G 3.79dBi & 5.8G 3.50dBi, reference to the appendix II for details	



### 13. TEST SETUP PHOTO

Reference to the appendix I for details.

### 14. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

\*\*\*\*\* END OF REPORT \*\*\*\*\*