

FCC Test Report

Report No.: AGC02174180502FE03

FCC ID : 2AF56-TS-C095W

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: Wireless Charging Base

BRAND NAME : PISEN

MODEL NAME : TS-C095W

CLIENT: GUANGDONG PISEN ELECTRONICS CO., LTD

DATE OF ISSUE : May 24, 2018

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Rules

REPORT VERSION V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

Attestation of Global Compliance



Page 2 of 28

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0		May 24, 2018	Valid	Initial Release

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	
3. MEASUREMENT UNCERTAINTY	6
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM5.2. EQUIPMENT USED IN EUT SYSTEM5.3. SUMMARY OF TEST RESULTS	8
6. TEST FACILITY	9
7. RADIATED EMISSION	
7.1TEST LIMIT	11 12
8. 20DB BANDWIDTH	16
8.1. MEASUREMENT PROCEDURE	16 17
9. FCC LINE CONDUCTED EMISSION TEST	18
9.1. LIMITS OF LINE CONDUCTED EMISSION TEST	18 18
9.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	19 20
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.



Report No.: AGC02174180502FE03 Page 4 of 28

1. VERIFICATION OF CONFORMITY

727 107	
Applicant	GUANGDONG PISEN ELECTRONICS CO., LTD
Address	NO.9,QINFU 1ST.STREET JINTANG INDUSTRY ZONE LIUYUE, HENGGANG TOWN, LONGGANG DISTRICT, SHENZHEN
Manufacturer	GUANGDONG PISEN ELECTRONICS CO., LTD
Address	NO.9,QINFU 1ST.STREET JINTANG INDUSTRY ZONE LIUYUE, HENGGANG TOWN, LONGGANG DISTRICT, SHENZHEN
Product Designation	Wireless Charging Base
Brand Name	PISEN
Test Model	TS-C095W
Date of test	May 18, 2018 to May 24, 2018
Deviation	None
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BR/RF
7	

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with Section 15.207, 15.209, 15.203 of the FCC Part 15, Subpart C Rules.

The results of testing in this report apply to the product/system which was tested only.

Tested By	Max Zhang	
CC D	Max Zhang(Zhang Yi)	May 24, 2018
Reviewed By	Bore xie	
CC in-	Bart Xie(Xie Xiaobin)	May 24, 2018
Approved By	Forrest ce	
-C	Forrest Lei(Lei Yonggang) Authorized Officer	May 24, 2018

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 5 of 28

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

71 major toorinical accomption of Ec	The decembed de felletting		
Operation Frequency	145.8KHz		
Maximum field strength	57.21dBuV/m(Peak)@3m		
Number of channels	1, the same of the		
Antenna Designation	Integrated Antenna (Met 15.203 Antenna requirement)		
Hardware Version	REV:00		
Software Version	V1.0		
Power Supply	DC 5V/DC 9V		

The results showed the sample (s) tested unless otherwise stated and the sample (s) are retained for 30 days only. The document is issued by (SC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago-gent.com.



Report No.: AGC02174180502FE03 Page 6 of 28

3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.agc-gent.com.



Report No.: AGC02174180502FE03 Page 7 of 28

4. DESCRIPTION OF TEST MODES

2, 402		AUC .	, CO
NO.		TEST MODE DESCRIPTION	
1	· Edward Same	Wireless charging Mode at 9V (Full load)	
2	S THE STORE SOURCE SOURCE	Wireless charging Mode at 9V (half load)	根據
3		Wireless charging Mode at 9V (Null load)	Manufacture (c) Manufacture Constant
4	超测 报测	Wireless charging Mode at 5V (Full load)	CO CO
5	Medial Com	Wireless charging Mode at 5V (half load)	
6	CC TO BE	Wireless charging Mode at 5V (Null load)	和
Noto:		The state of the s	Aleganic Market

Note:

1. The mode 1 was the worst case and only the data of the worst case record in this report.

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.




Page 8 of 28

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure:



5.2. EQUIPMENT USED IN EUT SYSTEM

•				15 V a 22 and
Item	Equipment	Model No.	ID or Specification	Remark
1	Wireless Charging Base	TS-C095W	2AF56-TS-C095W	EUT
2	Adapter	SJ-0510-USB	100-240V 50/60Hz 0.2A DC9V 2A	Support
3	Adapter	SJ-0511-USB	100-240V 50/60Hz 0.2A DC5V 2A	Support
4	Wireless electronic Load	· Francisco	Maximum power 12W	Support

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.209	Radiated Emission	Compliant
§15.215	20dB bandwidth	Compliant
§15.207	Conducted Emission	Compliant

The results showed the sample (s) tested unless otherwise stated and the sample (s) are retained for 30 days only. The document is issued by (SC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago-gent.com.



Page 9 of 28

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012
NVLAP LAB CODE	600153-0
Designation Number	CN5028
FCC Test Firm Registration Number	682566
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	M ESCI	10096	Jun.20, 2017	Jun.19, 2018
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
preamplifier	ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
Loop Antenna	A.H.Systems,Inc	SAS-562B	The state of the s	Feb. 27, 2018	Feb. 26, 2020
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.20, 2017	Jun.19, 2018
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun.20, 2017	Jun.19, 2018
LISN	R&S	ESH2-Z5	100086	Aug.21, 2017	Aug.20, 2018

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 10 of 28

7. RADIATED EMISSION

7.1TEST LIMIT

Standard FCC 15.209

Frequency	Distance	Field S	Field Strengths Limit		
(MHz)	Meters	μ V/m	dB(μV)/m		
0.009 ~ 0.490	300	2400/F(kHz)	South Comment of the state of t		
0.490 ~ 1.705	30	24000/F(kHz)	-0		
1.705 ~ 30	30	30			
30 ~ 88	3	100	40.0		
88 ~ 216	3	150	43.5		
216 ~ 960	3 Colored Control	200	46.0		
960 ~ 1000	3	500	54.0		
Above 1000	3	Other:74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average)			

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Report No.: AGC02174180502FE03 Page 11 of 28

7.2. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

	Spectrum Parameter	Setting
CO Miles	Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
100	Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
工 The Manual Compliance	Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




7.3. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

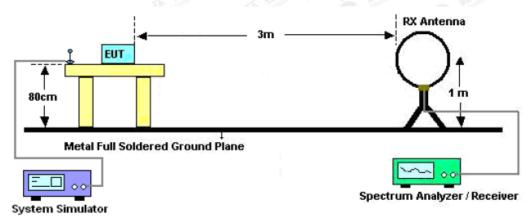

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

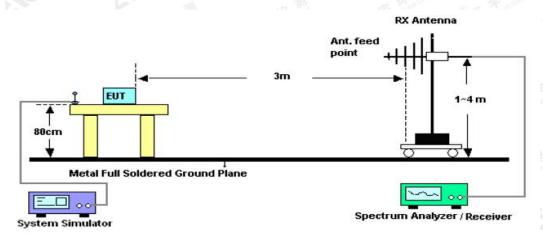

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 13 of 28


7.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

10°	Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) Peak	Limit dB(uV/m) Average	Margin dB	Pass/Fail
	0.1458	Face	46.81	10.4	57.21	104.33	47.12	Pass
6	0.1458	Side	45.29	10.4	55.69	104.33	48.64	Pass

Note: No other emissions found between lowest internal used/generated frequencies to 30MHz. The peak level of the emission is less than the average limit, so the average level shall be less than the limit without test.


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.





RADIATED EMISSION 30MHz-1GHZ


EUT:	Wireless Charging Base	Model Name. :	TS-C095W
Temperature :	20 ℃	Relative Humidtity:	48%
Pressure :	1010 hPa	Test Voltage :	Normal
Test Mode :	Mode 1	Polarization :	Horizontal

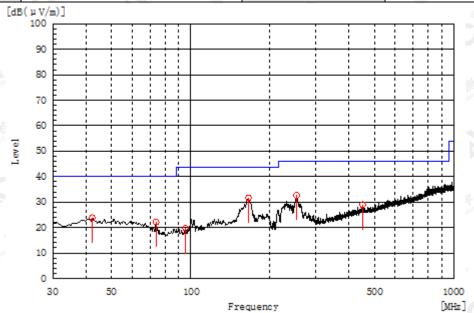

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
42.125	Н	6.4	17.4	23.8	40.0	16.2	Pass	150.0	314.6
165.800	THE HER	15.3	16.3	31.6	43.5	11.9	Pass	150.0	300.9
252.615	not Global H	16.6	16.0	32.6	46.0	13.4	Pass	100.0	20.5
73.650	Н	8.8	13.4	22.2	40.0	17.8	Pass	100.0	180.6
95.475	H	6.9	12.8	19.7	43.5	23.8	Pass	100.0	32.1
450.495	® # Honor Global C	6.9	22.1	29.0	46.0	17.0	Pass	150.0	108.3


RESULT: PASS

The results showed the sample (s) tested unless otherwise stated and the sample (s) are retained for 30 days only. The document is issued by (SC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago-gent.com.





3/1 3/00	And the second s		-1111
EUT:	Wireless Charging Base	Model Name. :	TS-C095W
Temperature:	20 ℃	Relative Humidtity:	48%
Pressure:	1010 hPa	Test Voltage :	Normal
Test Mode :	Mode 1	Polarization:	Vertical

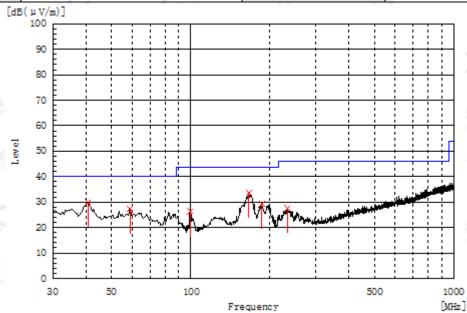

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
40.670	V	12.5	17.4	29.9	40.0	10.1	Pass	150.0	109.8
99.355	V	13.1	13.3	26.4	43.5	17.1	Pass	100.0	222.4
166.285	T V	17.4	16.3	33.7	43.5	9.8	Pass	100.0	270.1
233.215	A of Globar V	11.8	15.9	27.7	46.0	18.3	Pass	100.0	233.1
58.615	V	11.0	16.4	27.4	40.0	12.6	Pass	150.0	77.0
186.170	V	15.2	14.0	29.2	43.5	14.3	Pass	100.0	359.1

RESULT: PASS

Note:

Factor=Antenna Factor + Cable loss, Margin=Result-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.






8. 20DB BANDWIDTH


8.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2, Set the EUT Work on operation frequency.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a channel The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

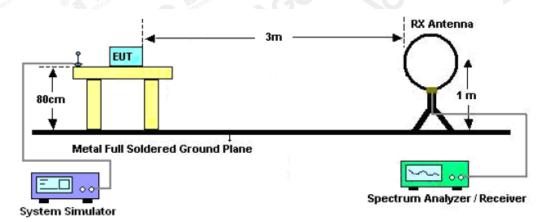

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.






8.3. MEASUREMENT RESULTS

TEST ITEM	20DB BANDWIDTH	(8) Alteration of Gib	® Attestation of Globs	(S) Allestation of
TEST MODULATION	FSK	(Q) /(C)		

Frequency (KHz)	Test Data (Hz)	Criteria	
145.8	148	PASS	

TEST PLOT OF BANDWIDTH

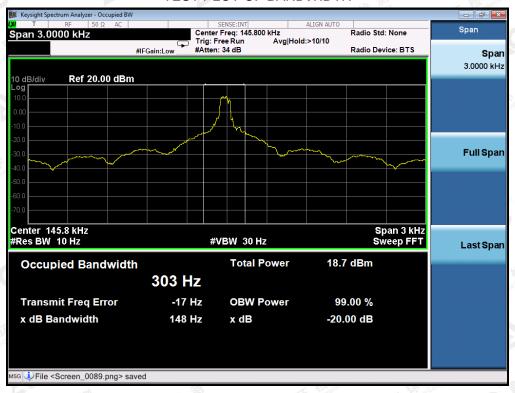

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 18 of 28

9. FCC LINE CONDUCTED EMISSION TEST


9.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage					
Frequency	Q.P.(dBuV)	Average(dBuV)				
150kHz~500kHz	66-56	56-46				
500kHz~5MHz	56	46				
5MHz~30MHz	060	50				

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

9.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

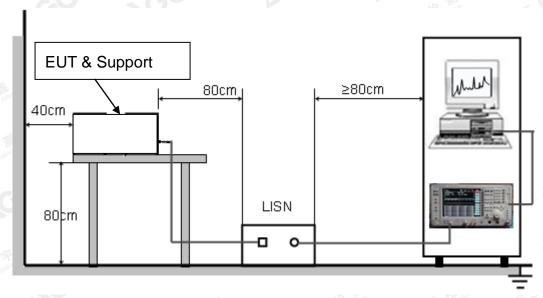

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a transfer



Report No.: AGC02174180502FE03 Page 19 of 28

9.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received charging voltage by adapter which received 120V/60Hzpower by a LISN...
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

9.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.



9.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST-L

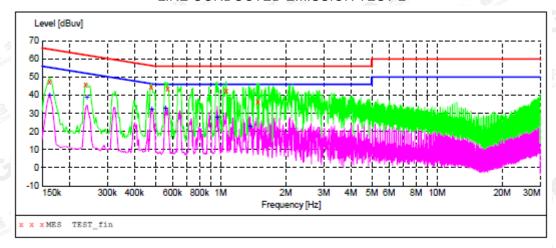

MEASUREMENT RESULT:

Frequency MHz	Level dBuv	Transd dB	Limit dBuv	Margin dB	Detector	Line	PE
0.162000	47.50	10.0	65	17.9	QP	Ll	FLO
0.238000	46.00	10.1	62	16.2	QP	Ll	FLO
0.478000	44.80	10.1	56	11.6	QP	Ll	FLO
0.570000	43.30	10.1	56	12.7	QP	Ll	FLO
1.062000	42.70	10.2	56	13.3	QP	L1	FLO
1.490000	36.30	10.2	56	19.7	QP	Ll	FLO

MEASUREMENT RESULT:


Frequency MHz	Level dBuv		Limit dBuv	Margin dB	Detector	Line	PE
0.162000	40.00	10.0	55	15.4	AV	L1	FLO
0.242000	38.90	10.1	52	13.1	AV	Ll	FLO
0.482000	32.30	10.1	46	14.0	AV	Ll	FLO
0.558000	33.00	10.1	46	13.0	AV	Ll	FLO
0.966000	28.20	10.2	46	17.8	AV	Ll	FLO
1.370000	23.00	10.2	46	23.0	AV	Ll	FLO

RESULT: PASS

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 1000, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a trip://www.agc-gett.com.



LINE CONDUCTED EMISSION TEST-N

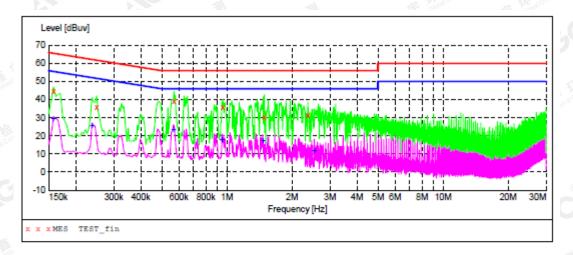

MEASUREMENT RESULT:

Frequency MHz	Level dBuv	Transd dB	Limit dBuv	Margin dB	Detector	Line	PE
0.158000	44.50	10.0	66	21.1	QP	N	FLO
0.250000	35.60	10.1	62	26.2	QP	N	FLO
0.570000	39.10	10.1	56	16.9	QP	N	FLO
0.958000	35.90	10.2	56	20.1	QP	N	FLO
1.490000	30.20	10.2	56	25.8	QP	N	FLO
2.370000	31.60	10.1	56	24.4	QP	N	FLO

MEASUREMENT RESULT:

Level dBuv	Transd dB	Limit dBuv	Margin dB	Detector	Line	PE
29.60	10.0	56	26.0	AV	N	FLO
26.10	10.1	52	26.1	AV	N	FLO
23.90	10.1	46	22.1	AV	N	FLO
18.40	10.2	46	27.6	AV	N	FLO
17.40	10.2	46	28.6	AV	N	FLO
12.00	10.0	46	34.0	AV	N	FLO
	29.60 26.10 23.90 18.40 17.40	dBuv dB 29.60 10.0 26.10 10.1 23.90 10.1 18.40 10.2 17.40 10.2	dBuv dB dBuv 29.60 10.0 56 26.10 10.1 52 23.90 10.1 46 18.40 10.2 46 17.40 10.2 46	dBuv dB dBuv dB 29.60 10.0 56 26.0 26.10 10.1 52 26.1 23.90 10.1 46 22.1 18.40 10.2 46 27.6 17.40 10.2 46 28.6	dBuv dB dBuv dB 29.60 10.0 56 26.0 AV 26.10 10.1 52 26.1 AV 23.90 10.1 46 22.1 AV 18.40 10.2 46 27.6 AV 17.40 10.2 46 28.6 AV	29.60 10.0 56 26.0 AV N 26.10 10.1 52 26.1 AV N 23.90 10.1 46 22.1 AV N 18.40 10.2 46 27.6 AV N 17.40 10.2 46 28.6 AV N


RESULT. PASS

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.cett.com.




APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ

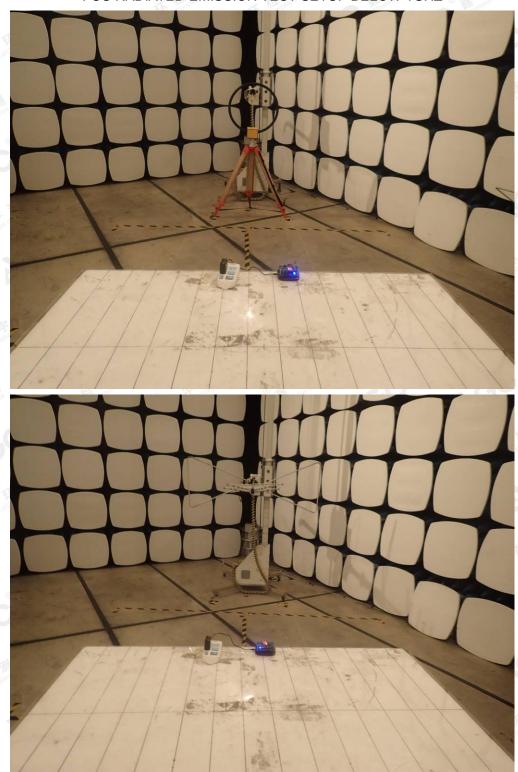

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.





FCC LINE CONDUCTED EMISSION TEST SETUP



The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gett.com.

Attestation of Global Compliance



APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT



BOTTOM VIEW OF EUT



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.

Attestation of Global Compliance



FRONT VIEW OF EUT



BACK VIEW OF EUT



The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.

Attestation of Global Compliance



LEFT VIEW OF EUT



RIGHT VIEW OF EUT




The results showed the sample (s) tested unless otherwise stated and the sample (s) are retained for 30 days only. The document is issued by (SC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago-gent.com.


Attestation of Global Compliance



OPEN VIEW-1 OF EUT

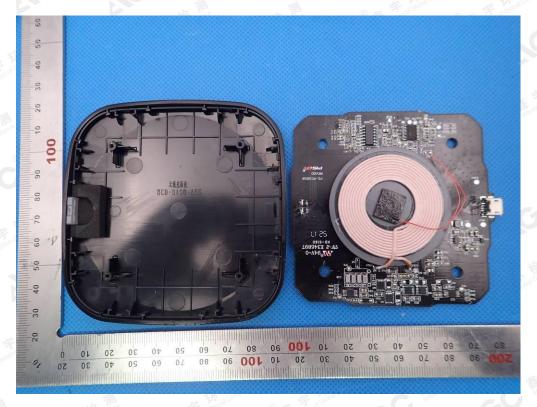


INTERNAL VIEW-1 OF EUT

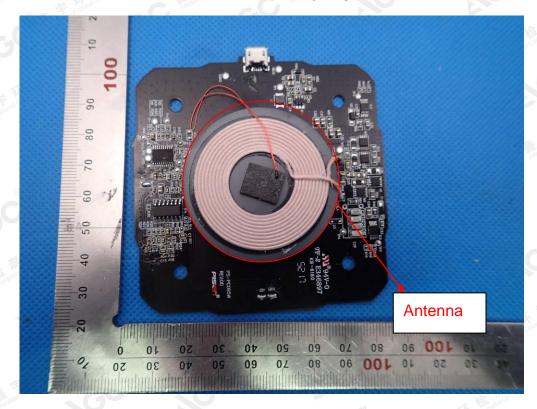

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



INTERNAL VIEW-2 OF EUT

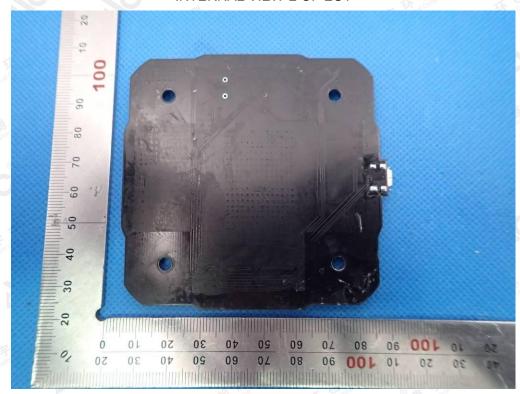

----FND OF REPORT----

The results shown this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.

Attestation of Global Compliance