

FCC Radio Test Report

FCC ID: 2AF5PMGMT87

Report No. : BTL-FCCP-5-2006T060
Equipment : D3.1 Cable Modem plus AX6000 Router with Voice
Model Name : MT8733, MG8725
Brand Name : MOTOROLA
Applicant : MTRLC LLC
Address : 225 Franklin Street, 26th Floor, Boston, MA 02110 USA


Radio Function : RLAN 5 GHz (U-NII 1, U-NII 2A, U-NII 2C, U-NII 3)

FCC Rule Part(s) : FCC Part15, Subpart E (15.407)
Measurement Procedure(s) : ANSI C63.10-2013

Date of Receipt : 2020/6/12
Date of Test : 2020/6/12 ~ 2020/8/11
Issued Date : 2020/9/4


The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by :


Peter Chen, Engineer



Approved by :

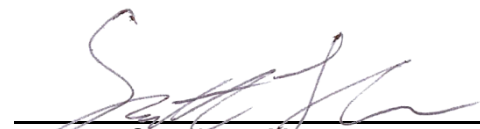
Scott Hsu, Manager

BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299

Fax: +886-2-2657-3331

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

REPORT ISSUED HISTORY	5
1 SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
1.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	8
1.5 DUTY CYCLE	12
2 GENERAL INFORMATION	15
2.1 DESCRIPTION OF EUT	15
2.2 TEST MODES	20
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	22
2.4 SUPPORT UNITS	22
3 AC POWER LINE CONDUCTED EMISSIONS TEST	23
3.1 LIMIT	23
3.2 TEST PROCEDURE	23
3.3 DEVIATION FROM TEST STANDARD	23
3.4 TEST SETUP	24
3.5 TEST RESULT	24
4 RADIATED EMISSIONS TEST	25
4.1 LIMIT	25
4.2 TEST PROCEDURE	26
4.3 DEVIATION FROM TEST STANDARD	26
4.4 TEST SETUP	27
4.5 EUT OPERATING CONDITIONS	28
4.6 TEST RESULT – 30 MHZ TO 1 GHZ	28
4.7 TEST RESULT – ABOVE 1 GHZ	28
5 BANDWIDTH TEST	29
5.1 LIMIT	29
5.2 TEST PROCEDURE	29
5.3 DEVIATION FROM TEST STANDARD	29
5.4 TEST SETUP	29
5.5 EUT OPERATING CONDITIONS	29
5.6 TEST RESULT	29
6 OUTPUT POWER TEST	30
6.1 LIMIT	30
6.2 TEST PROCEDURE	30
6.3 DEVIATION FROM TEST STANDARD	30
6.4 TEST SETUP	30
6.5 EUT OPERATING CONDITIONS	30
6.6 TEST RESULT	30
7 POWER SPECTRAL DENSITY	31
7.1 LIMIT	31
7.2 TEST PROCEDURE	31
7.3 DEVIATION FROM TEST STANDARD	31
7.4 TEST SETUP	31
7.5 EUT OPERATING CONDITIONS	31
7.6 TEST RESULT	31

8	LIST OF MEASURING EQUIPMENTS	32
9	EUT TEST PHOTO	33
10	EUT PHOTOS	33
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	34
APPENDIX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	39
APPENDIX C	RADIATED EMISSIONS - ABOVE 1 GHZ	44
APPENDIX D	BANDWIDTH	390
APPENDIX E	CONDUCTED OUTPUT POWER	471
APPENDIX F	POWER SPECTRAL DENSITY	512

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	2020/8/26
R01	Revised typo.	2020/8/28
R02	Revised report to address TCB's comments.	2020/9/4

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

FCC Part 15, Subpart E (15.407)				
Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.205 15.209 15.407(b)	Radiated Emissions	APPENDIX B APPENDIX C	Pass	-----
15.407(a)	Bandwidth	APPENDIX D	Pass	-----
15.407(a)	Output Power	APPENDIX E	Pass	-----
15.407(a)	Power Spectral Density	APPENDIX F	Pass	-----
15.203	Antenna Requirement	-----	Pass	-----
15.407(c)	Automatically Discontinue Transmission	-----	Pass	NOTE (3)

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

The test sites and facilities are covered under FCC RN: 674415 and DN: TW0659.

- C05 CB08 CB11 CB15 CB16
 SR06

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C05	CISPR	150 kHz ~ 30MHz	3.44

B. Radiated emissions test :

Test Site	Measurement Frequency Range	U,(dB)
CB15	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

C. Conducted test :

Test Item	U,(dB)
Bandwidth	1.13
Output power	1.07
Power Spectral Density	1.20
Conducted Band edges	1.13
Frequency Stability	1.13

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	24 °C, 57 %	AC 120V	William Wei
Radiated emissions below 1 GHz	Refer to data	AC 120V	John Chuang
Radiated emissions above 1 GHz	Refer to data	AC 120V	John Chuang
Bandwidth	25.1 °C, 51 %	AC 120V	Tim Lee
Output Power	25.1 °C, 51 %	AC 120V	Tim Lee
Power Spectral Density	25.1 °C, 51 %	AC 120V	Tim Lee

1.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

Non-Beamforming mode				
UNII-1				
Test Software	Access Manual Tool V3.2.0.1			
Mode	5180 MHz	5200 MHz	5240 MHz	Data Rate
IEEE 802.11a	83	100	92	6 Mbps
IEEE 802.11n (HT20)	76	76	78	MCS 0
IEEE 802.11ac (VHT20)	76	76	78	MCS 0
IEEE 802.11ax (HEW20)	78	79	81	MCS 0
Mode	5190 MHz	5230 MHz		Data Rate
IEEE 802.11n (HT40)	56	90		MCS 0
IEEE 802.11ac (VHT40)	56	90		MCS 0
IEEE 802.11ax (HEW40)	68	88		MCS 0
Mode	5210 MHz			Data Rate
IEEE 802.11ac (VHT80)	53			MCS 0
IEEE 802.11ax (HEW80)	52			MCS 0
Mode	5250 MHz			Data Rate
IEEE 802.11ac (VHT160)	55			MCS 0
IEEE 802.11ax (HEW160)	54			MCS 0

UNII-2A				
Test Software	Access Manual Tool V3.2.0.1			
Mode	5260 MHz	5300 MHz	5320 MHz	Data Rate
IEEE 802.11a	58	60	75	6 Mbps
IEEE 802.11n (HT20)	54	53	53	MCS 0
IEEE 802.11ac (VHT20)	54	53	53	MCS 0
IEEE 802.11ax (HEW20)	56	57	56	MCS 0
Mode	5270 MHz	5310 MHz		Data Rate
IEEE 802.11n (HT40)	65	50		MCS 0
IEEE 802.11ac (VHT40)	65	50		MCS 0
IEEE 802.11ax (HEW40)	66	52		MCS 0
Mode	5290 MHz			Data Rate
IEEE 802.11ac (VHT80)	45			MCS 0
IEEE 802.11ax (HEW80)	48			MCS 0

UNII-2C				
Test Software	Access Manual Tool V3.2.0.1			
Mode	5500 MHz	5580 MHz	5700 MHz	Data Rate
IEEE 802.11a	60	57	61	6 Mbps
IEEE 802.11n (HT20)	51	51	53	MCS 0
IEEE 802.11ac (VHT20)	51	51	53	MCS 0
IEEE 802.11ax (HEW20)	57	57	59	MCS 0
Mode	5510 MHz	5550 MHz	5670 MHz	Data Rate
IEEE 802.11n (HT40)	60	60	61	MCS 0
IEEE 802.11ac (VHT40)	60	60	61	MCS 0
IEEE 802.11ax (HEW40)	62	61	63	MCS 0
Mode	5530 MHz	5610 MHz		Data Rate
IEEE 802.11ac (VHT80)	48	74		MCS 0
IEEE 802.11ax (HEW80)	61	55		MCS 0
Mode	5570 MHz			Data Rate
IEEE 802.11ac (VHT160)	55			MCS 0
IEEE 802.11ax (HEW160)	60			MCS 0

UNII-3				
Test Software	Access Manual Tool V3.2.0.1			
Mode	5745 MHz	5785 MHz	5825 MHz	Data Rate
IEEE 802.11a	100	100	101	6 Mbps
IEEE 802.11n (HT20)	100	100	101	MCS 0
IEEE 802.11ac (VHT20)	100	100	101	MCS 0
IEEE 802.11ax (HEW20)	92	92	92	MCS 0
Mode	5755 MHz	5795 MHz		Data Rate
IEEE 802.11n (HT40)	90	90		MCS 0
IEEE 802.11ac (VHT40)	90	90		MCS 0
IEEE 802.11ax (HEW40)	90	90		MCS 0
Mode	5775 MHz			Data Rate
IEEE 802.11ac (VHT80)	70			MCS 0
IEEE 802.11ax (HEW80)	80			MCS 0

Beamforming mode

UNII-1

Test Software	Tera Term proxy extension V 1.0.0.18			
Mode	5180 MHz	5200 MHz	5240 MHz	Data Rate
IEEE 802.11ac (VHT20)	68	69	70	MCS 0
IEEE 802.11ax (HEW20)	70	70	72	MCS 0
Mode	5190 MHz	5230 MHz		Data Rate
IEEE 802.11ac (VHT40)	54	69		MCS 0
IEEE 802.11ax (HEW40)	46	75		MCS 0
Mode	5210 MHz			Data Rate
IEEE 802.11ac (VHT80)	52			MCS 0
IEEE 802.11ax (HEW80)	42			MCS 0
Mode	5250 MHz			Data Rate
IEEE 802.11ac (VHT160)	46			MCS 0
IEEE 802.11ax (HEW160)	48			MCS 0

UNII-2A

Test Software	Tera Term proxy extension V 1.0.0.18			
Mode	5260 MHz	5300 MHz	5320 MHz	Data Rate
IEEE 802.11ac (VHT20)	47	47	47	MCS 0
IEEE 802.11ax (HEW20)	49	49	49	MCS 0
Mode	5270 MHz	5310 MHz		Data Rate
IEEE 802.11ac (VHT40)	47	47		MCS 0
IEEE 802.11ax (HEW40)	50	52		MCS 0
Mode	5290 MHz			Data Rate
IEEE 802.11ac (VHT80)	40			MCS 0
IEEE 802.11ax (HEW80)	42			MCS 0

UNII-2C

Test Software	Tera Term proxy extension V 1.0.0.18			
Mode	5500 MHz	5580 MHz	5700 MHz	Data Rate
IEEE 802.11ac (VHT20)	47	47	47	MCS 0
IEEE 802.11ax (HEW20)	49	49	52	MCS 0
Mode	5510 MHz	5550 MHz	5670 MHz	Data Rate
IEEE 802.11ac (VHT40)	42	42	43	MCS 0
IEEE 802.11ax (HEW40)	48	49	49	MCS 0
Mode	5530 MHz	5610 MHz		Data Rate
IEEE 802.11ac (VHT80)	44	42		MCS 0
IEEE 802.11ax (HEW80)	44	46		MCS 0
Mode	5570 MHz			Data Rate
IEEE 802.11ac (VHT160)	60			MCS 0
IEEE 802.11ax (HEW160)	48			MCS 0





UNII-3				
Test Software	Tera Term proxy extension V 1.0.0.18			
Mode	5745 MHz	5785 MHz	5825 MHz	Data Rate
IEEE 802.11ac (VHT20)	82	82	82	MCS 0
IEEE 802.11ax (HEW20)	81	81	82	MCS 0
Mode	5755 MHz	5795 MHz		Data Rate
IEEE 802.11ac (VHT40)	81	82		MCS 0
IEEE 802.11ax (HEW40)	82	82		MCS 0
Mode	5775 MHz			Data Rate
IEEE 802.11ac (VHT80)	68			MCS 0
IEEE 802.11ax (HEW80)	80			MCS 0







1.5 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

Remark	Delta 1			Delta 2	On Time/Period	10 log(1/Duty Cycle)
Mode	ON (ms)	Numbers (ON)	On Time (B) (ms)	Period (ON+OFF) (ms)	Duty Cycle (%)	Duty Factor (dB)
IEEE 802.11a	0.120	1	0.120	0.235	51.06%	2.92
IEEE 802.11n (HT20)	0.138	1	0.138	0.244	56.56%	2.48
IEEE 802.11n (HT40)	0.120	1	0.120	0.220	54.55%	2.63
IEEE 802.11ac (VHT20)	0.145	1	0.145	0.185	78.38%	1.06
IEEE 802.11ac (VHT40)	0.095	1	0.095	0.160	59.38%	2.26
IEEE 802.11ac (VHT80)	0.100	1	0.100	0.155	64.52%	1.90
IEEE 802.11ac (VHT160)	0.120	1	0.120	0.150	80.00%	0.97
IEEE 802.11ax (HEW20)	0.310	1	0.310	0.350	88.57%	0.53
IEEE 802.11ax (HEW40)	0.270	1	0.270	0.340	79.41%	1.00
IEEE 802.11ax (HEW80)	0.276	1	0.276	0.324	85.19%	0.70
IEEE 802.11ax (HEW160)	0.432	1	0.432	0.464	93.10%	0.31

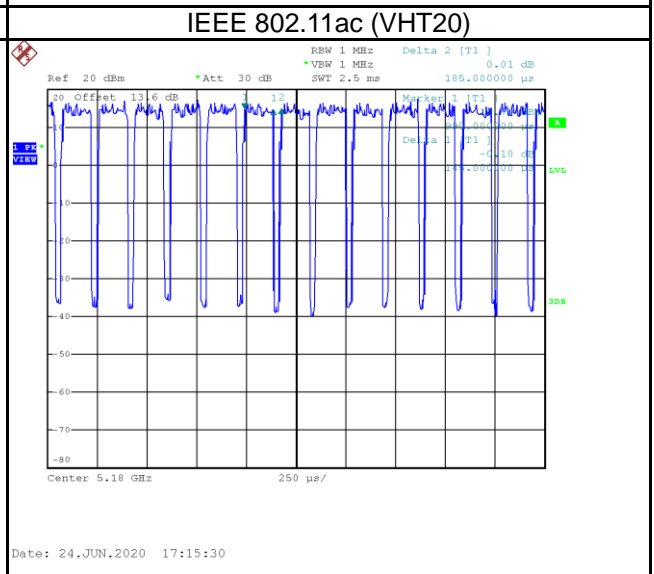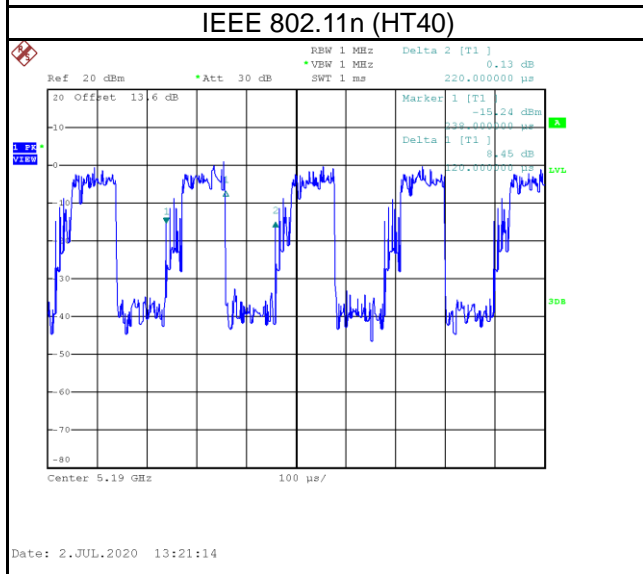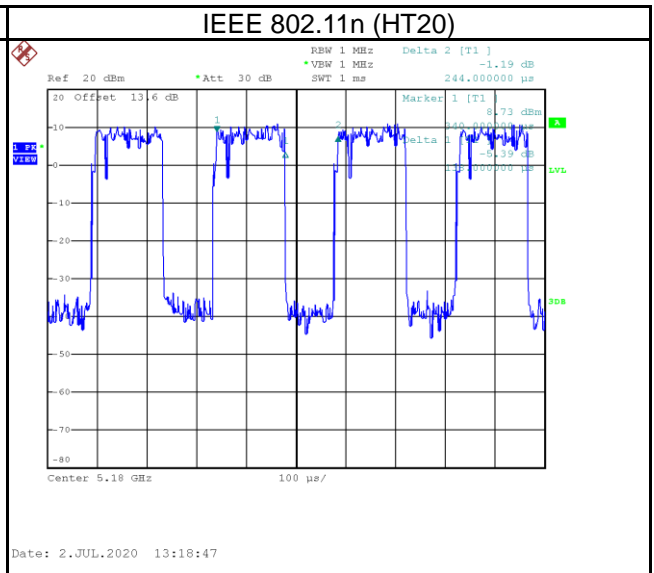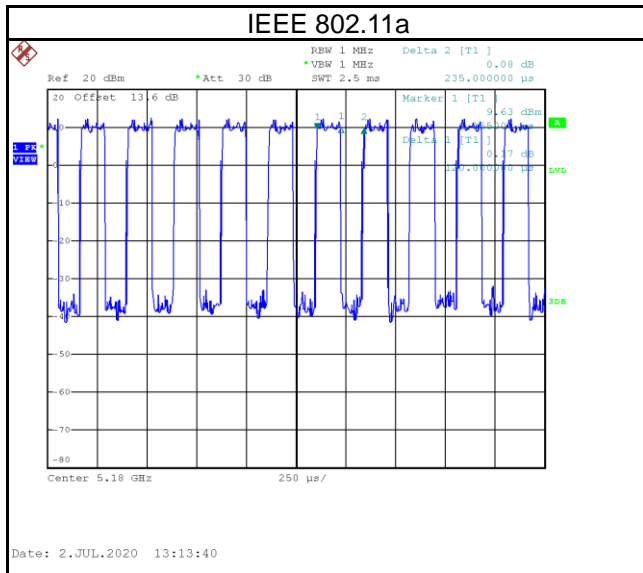

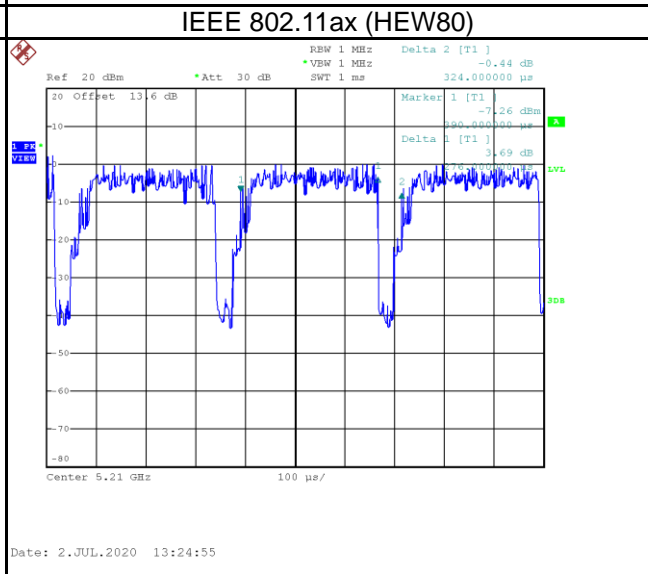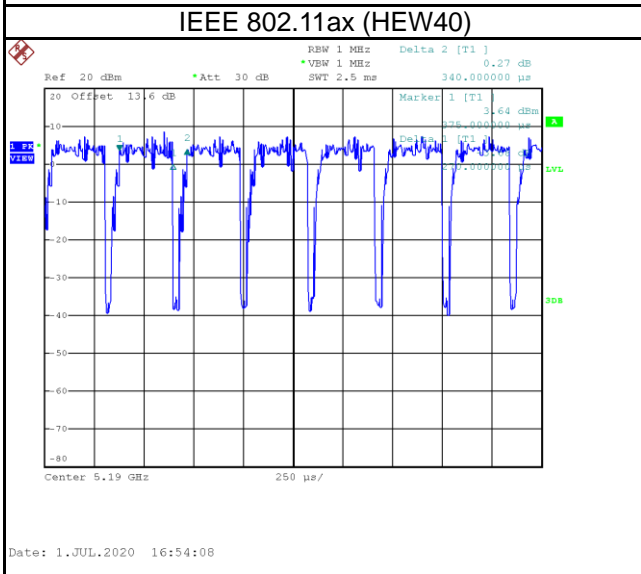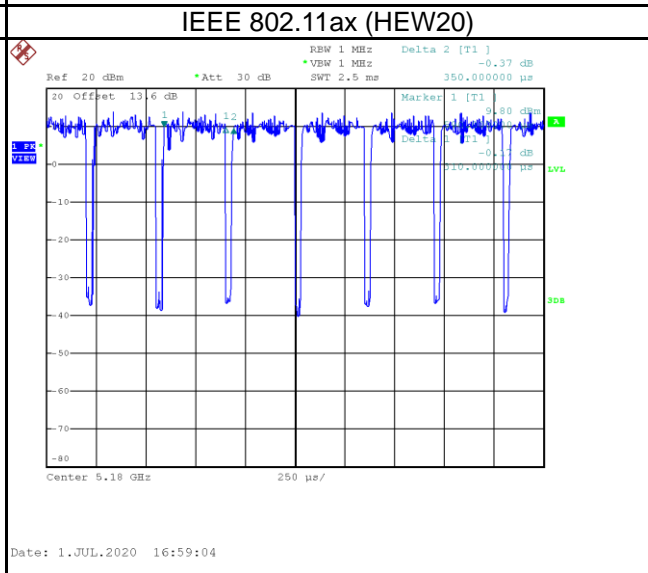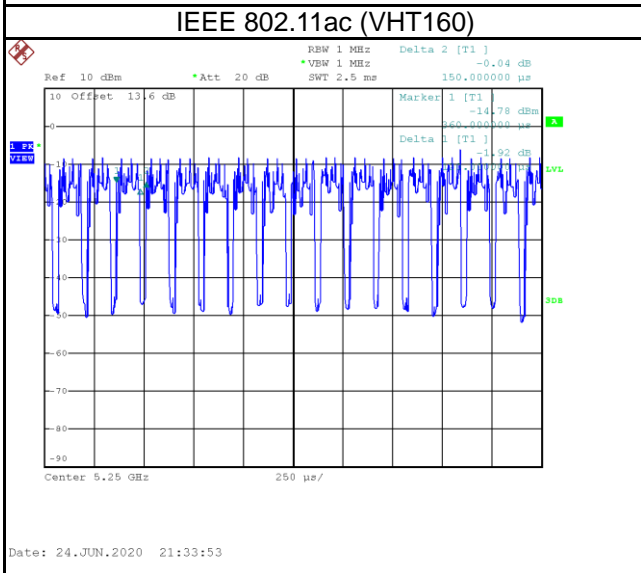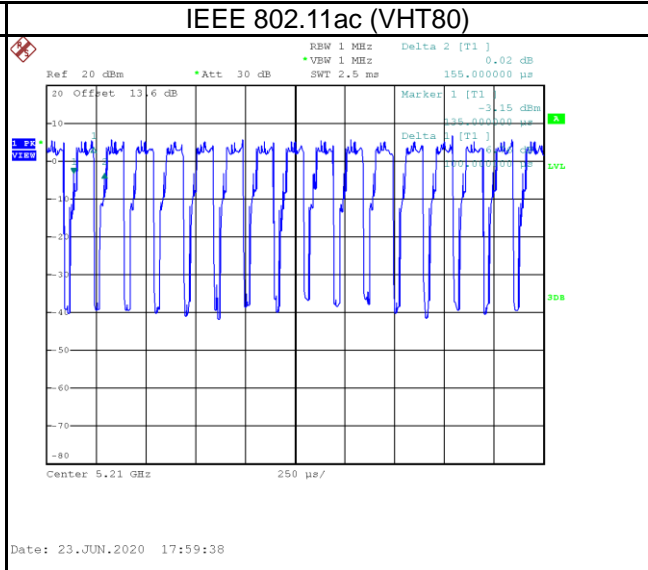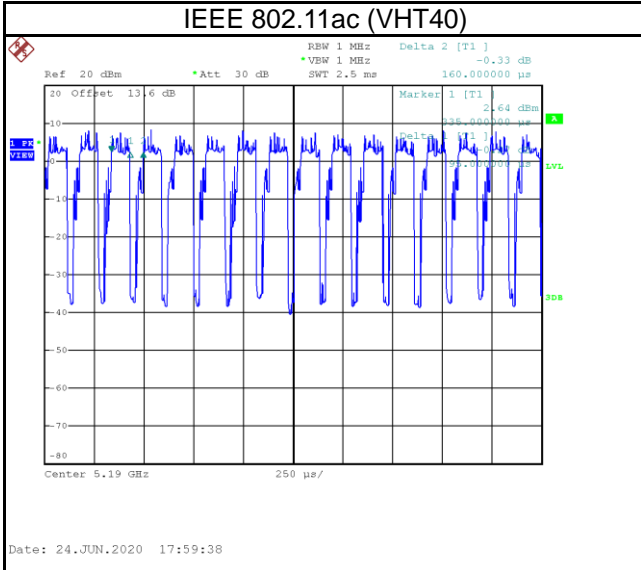

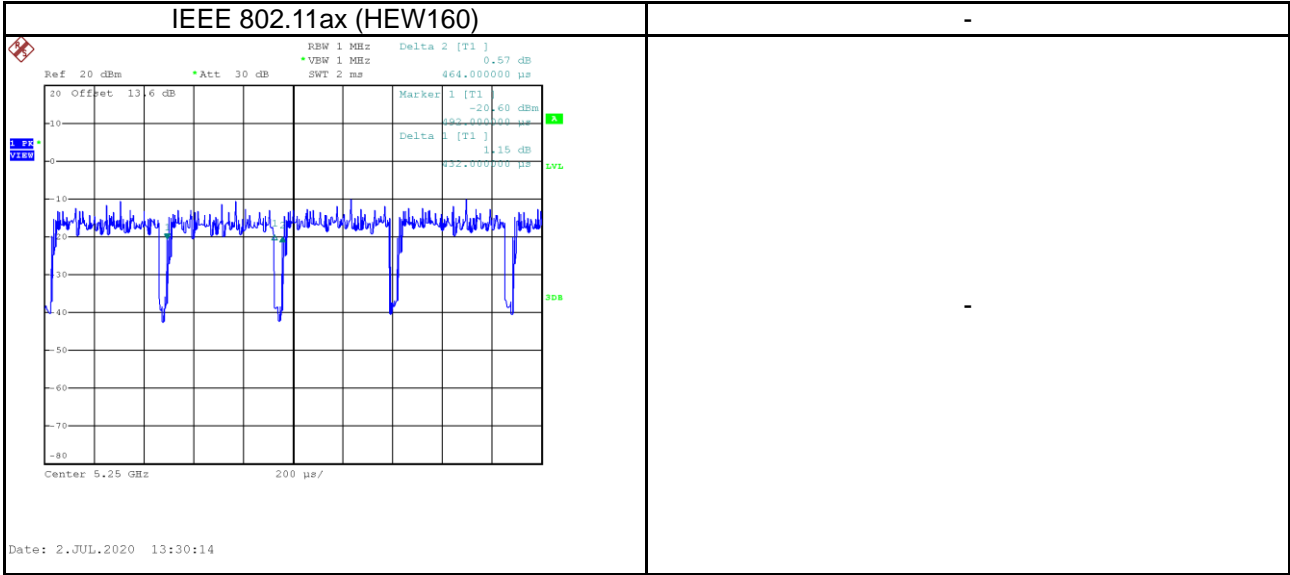

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	D3.1 Cable Modem plus AX6000 Router with Voice		
Model Name	MT8733, MG8725		
Brand Name	MOTOROLA		
Model Difference	Model Name	VoIP port	
	MT8733	YES	
	MG8725	NO	
Power Source	DC Voltage supplied from AC/DC adapter. #1 Ktec / KSA-36W-120300HU #2 HONOR / ADS-40FSI-12 12036EPCU		
Power Rating	#1 Input: 100-240V~ 50/60Hz 1.0A Output: 12Vdc 3.0A #2 Input: 100-240V~ 50/60Hz Max. 1.0A Output: 12Vdc 3.0A		
Products Covered	2 * Adapter: (1) Ktec / KSA-36W-120300HU (2) HONOR / ADS-40FSI-12 12036EPCU		
Frequency Range	UNII-1: 5150 MHz to 5250 MHz UNII-2A: 5250 MHz to 5350 MHz UNII-2C: 5470 MHz to 5725 MHz UNII-3: 5725 MHz to 5850 MHz		
Operation Frequency	UNII-1: 5180 MHz to 5240 MHz UNII-2A: 5260 MHz to 5320 MHz UNII-2C: 5500 MHz to 5700 MHz UNII-3: 5745 MHz to 5825 MHz		
Modulation Technology	OFDM		
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6 Mbps 802.11n: Up to 800Mbps 802.11ac: Up to 3466.7 Mbps 802.11ax: Up to 4803.9 Mbps		
Output Power Max. for UNII-1	IEEE 802.11a: 29.83 dBm (0.9609 W) IEEE 802.11n (HT20): 24.73 dBm (0.2973 W) IEEE 802.11n (HT40): 27.25 dBm (0.5305 W) IEEE 802.11ac (VHT20): 24.79 dBm (0.3011 W) IEEE 802.11ac (VHT40): 27.30 dBm (0.5366 W) IEEE 802.11ac (VHT80): 18.57 dBm (0.0719 W) IEEE 802.11ac (VHT160): 18.20 dBm (0.0660 W) IEEE 802.11ax (HEW20): 25.88 dBm (0.3876 W) IEEE 802.11ax (HEW40): 27.09 dBm (0.5117 W) IEEE 802.11ax (HEW80): 18.73 dBm (0.0747 W) IEEE 802.11ax (HEW160): 18.30 dBm (0.0676 W)		
Output Power Max. for UNII-2A	IEEE 802.11a: 23.82 dBm (0.2409 W) IEEE 802.11n (HT20): 18.75 dBm (0.0750 W) IEEE 802.11n (HT40): 21.43 dBm (0.1390 W) IEEE 802.11ac (VHT20): 18.82 dBm (0.0762 W) IEEE 802.11ac (VHT40): 21.46 dBm (0.1398 W) IEEE 802.11ac (VHT80): 16.51 dBm (0.0447 W) IEEE 802.11ax (HEW20): 19.57 dBm (0.0906W) IEEE 802.11ax (HEW40): 21.87 dBm (0.1537 W) IEEE 802.11ax (HEW80): 17.61 dBm (0.0577 W)		

Output Power Max. for UNII-2C	IEEE 802.11a: 20.57 dBm (0.1140 W) IEEE 802.11n (HT20): 18.60 dBm (0.0725 W) IEEE 802.11n (HT40): 20.67 dBm (0.1167 W) IEEE 802.11ac (VHT20): 18.69 dBm (0.0740 W) IEEE 802.11ac (VHT40): 20.75 dBm (0.1187 W) IEEE 802.11ac (VHT80): 23.92 dBm (0.2465 W) IEEE 802.11ac (VHT160): 18.04 dBm (0.0637 W) IEEE 802.11ax (HEW20): 20.30 dBm (0.1072 W) IEEE 802.11ax (HEW40): 21.56 dBm (0.1432 W) IEEE 802.11ax (HEW80): 20.82 dBm (0.1209 W) IEEE 802.11ax (HEW160): 19.24 dBm (0.0840 W)
Output Power Max. for UNII-3	IEEE 802.11a: 29.91 dBm (0.9796 W) IEEE 802.11n (HT20): 29.80 dBm (0.9544 W) IEEE 802.11n (HT40): 27.33 dBm (0.5402 W) IEEE 802.11ac (VHT20): 29.97 dBm (0.9927 W) IEEE 802.11ac (VHT40): 27.39 dBm (0.5478 W) IEEE 802.11ac (VHT80): 22.53 dBm (0.1789 W) IEEE 802.11ax (HEW20): 28.16 dBm (0.6543 W) IEEE 802.11ax (HEW40): 27.58 dBm (0.5723 W) IEEE 802.11ax (HEW80): 25.26 dBm (0.3358 W)
Output Power Max. for UNII-1 Beamforming mode	IEEE 802.11ac (VHT20): 23.32 dBm (0.2146 W) IEEE 802.11ac (VHT40): 22.69 dBm (0.1856 W) IEEE 802.11ac (VHT80): 19.35 dBm (0.0862 W) IEEE 802.11ac (VHT160): 16.43 dBm (0.0440 W) IEEE 802.11ax (HEW20): 24.12 dBm (0.2581 W) IEEE 802.11ax (HEW40): 24.57 dBm (0.2864 W) IEEE 802.11ax (HEW80): 17.17 dBm (0.0521 W) IEEE 802.11ax (HEW160): 17.31 dBm (0.0539 W)
Output Power Max. for UNII-2A Beamforming mode	IEEE 802.11ac (VHT20): 17.66 dBm (0.0583 W) IEEE 802.11ac (VHT40): 17.74 dBm (0.0594 W) IEEE 802.11ac (VHT80): 15.83 dBm (0.0383 W) IEEE 802.11ax (HEW20): 18.39 dBm (0.0691 W) IEEE 802.11ax (HEW40): 19.02 dBm (0.0799 W) IEEE 802.11ax (HEW80): 16.80 dBm (0.0479 W)
Output Power Max. for UNII-2C Beamforming mode	IEEE 802.11ac (VHT20): 17.31 dBm (0.0539 W) IEEE 802.11ac (VHT40): 16.56 dBm (0.0452 W) IEEE 802.11ac (VHT80): 17.02 dBm (0.0504 W) IEEE 802.11ac (VHT160): 19.34 dBm (0.0859 W) IEEE 802.11ax (HEW20): 18.99 dBm (0.0793 W) IEEE 802.11ax (HEW40): 18.39 dBm (0.0691 W) IEEE 802.11ax (HEW80): 17.95 dBm (0.0623 W) IEEE 802.11ax (HEW160): 16.75 dBm (0.0473 W)
Output Power Max. for UNII-3 Beamforming mode	IEEE 802.11ac (VHT20): 25.84 dBm (0.3838 W) IEEE 802.11ac (VHT40): 25.88 dBm (0.3874 W) IEEE 802.11ac (VHT80): 13.38 dBm (0.0218 W) IEEE 802.11ax (HEW20): 25.93 dBm (0.3914 W) IEEE 802.11ax (HEW40): 25.81 dBm (0.3809 W) IEEE 802.11ax (HEW80): 25.44 dBm (0.3502 W)
Test Model	MT8733
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

(1) For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

(2) Channel List:

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HEW20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HEW40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HEW80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HEW20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HEW40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HEW80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HEW20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HEW40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HEW80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

802.11ac (VHT160) 802.11ax (HEW160)	
Channel	Frequency (MHz)
50	5250
114	5570

(3) Table for Filed Antenna:

Ant.	Model No.	Antenna Type	Connector	Gain (dBi)
1	PCB	Dipole	SMA	4
2	PCB	Dipole	SMA	4
3	PCB	Dipole	SMA	4
4	PCB	Dipole	SMA	4

Note:

- (1) The EUT incorporates a MIMO function. Physically, the EUT provides four completed transmitters and receivers (4T4R).
- (2) For Power Spectral Density
 Directional Gain = $10 \cdot \log\{[10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20}]^2 / N_{ANT}\} = 10.02 \text{ dBi} > 6 \text{ dBi}$
 To UNII-1, the reduced power spectral density limits (dBm/MHz) = $17 - (10.02 - 6) = 12.98$.
 To UNII-2A and UNII-2C, the reduced power spectral density limits (dBm/MHz) = $11 - (10.02 - 6) = 6.98$.
 To UNII-3, the reduced power spectral density limits (dBm/MHz) = $30 - (10.02 - 6) = 25.98$.

For Conducted Output Power

For $N_{ANT} = 4 < 5$,

Direction gain = $G_{ANT} + 0 = 4 + 0 = 4 \text{ dBi}$.

The Direction gain is less than 6 dBi, so output power limits will not be reduced.

(a) For Beamforming mode

Directional Gain = $10 \log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2 / N_{ANT}] = 10.02 \text{ dBi} > 6 \text{ dBi}$.

To UNII-1,

the reduced power spectral density limits (dBm/MHz) = $17 - (10.02 - 6) = 12.98$;

the reduced output power limits (dBm) = $30 - (10.02 - 6) = 25.98$.

To UNII-2A and UNII-2C,

the reduced power spectral density limits (dBm/MHz) = $11 - (10.02 - 6) = 6.98$;

the reduced output power limits (dBm) = $24 - (10.02 - 6) = 19.98$.

To UNII-3,

the reduced power spectral density limits (dBm/500 kHz) = $30 - (10.02 - 6) = 25.98$;

the reduced output power limits (dBm) = $30 - (10.02 - 6) = 25.98$.

Beamforming gain is 4 dBi

(4) Operating Mode and Antenna Configuration

TX Mode	Operating Mode	4TX
	IEEE 802.11a	V (Ant. 1+Ant. 2+Ant. 3+Ant. 4)
	IEEE 802.11n (HT20)	V (Ant. 1+Ant. 2+Ant. 3+Ant. 4)
	IEEE 802.11n (HT40)	V (Ant. 1+Ant. 2+Ant. 3+Ant. 4)
	IEEE 802.11ac (VHT20)	V (Ant. 1+Ant. 2+Ant. 3+Ant. 4)
	IEEE 802.11ac (VHT40)	V (Ant. 1+Ant. 2+Ant. 3+Ant. 4)
	IEEE 802.11ac (VHT80)	V (Ant. 1+Ant. 2+Ant. 3+Ant. 4)
	IEEE 802.11ac (VHT160)	V (Ant. 1+Ant. 2+Ant. 3+Ant. 4)
	IEEE 802.11ax (HEW20)	V (Ant. 1+Ant. 2+Ant. 3+Ant. 4)
	IEEE 802.11ax (HEW40)	V (Ant. 1+Ant. 2+Ant. 3+Ant. 4)
	IEEE 802.11ax (HEW80)	V (Ant. 1+Ant. 2+Ant. 3+Ant. 4)
	IEEE 802.11ax (HEW160)	V (Ant. 1+Ant. 2+Ant. 3+Ant. 4)

2.2 TEST MODES


Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	TX Mode_IEEE 802.11ac (VHT40)	102	-
	TX Mode_IEEE 802.11ac (VHT40)	134	Beamforming mode
Transmitter Radiated Emissions (above 1GHz)	TX Mode_IEEE 802.11a	36/48, 52/64	Bandedge
	TX Mode_IEEE 802.11ac (VHT20) TX Mode_IEEE 802.11ax (HEW20)	100/140, 149/165	
	TX Mode_IEEE 802.11ac (VHT40) TX Mode_IEEE 802.11ax (HEW40)	38/46, 54/62 102/134, 151/159	
	TX Mode_IEEE 802.11ac (VHT80) TX Mode_IEEE 802.11ax (HEW80)	42, 58 106/122, 155	
	TX Mode_IEEE 802.11ac (VHT160) TX Mode_IEEE 802.11ax (HEW160)	50 114	
	TX Mode_IEEE 802.11a	36/40/48 52/60/64	Harmonic
	TX Mode_IEEE 802.11ac (VHT20) TX Mode_IEEE 802.11ax (HEW20)	100/116/140 149/157/165	
	TX Mode_IEEE 802.11ac (VHT40) TX Mode_IEEE 802.11ax (HEW40)	38/46/ 54/62 102/110/134 151/159	
	TX Mode_IEEE 802.11ac (VHT80) TX Mode_IEEE 802.11ax (HEW80)	42, 58 106/122, 155	
	TX Mode_IEEE 802.11ac (VHT160) TX Mode_IEEE 802.11ax (HEW160)	50 114	
Bandwidth & Power Spectral Density	TX Mode_IEEE 802.11a	36/40/48 52/60/64	-
	TX Mode_IEEE 802.11ac (VHT20) TX Mode_IEEE 802.11ax (HEW20)	100/116/140 149/157/165	
	TX Mode_IEEE 802.11ac (VHT40) TX Mode_IEEE 802.11ax (HEW40)	38/46/ 54/62 102/110/134 151/159	
	TX Mode_IEEE 802.11ac (VHT80) TX Mode_IEEE 802.11ax (HEW80)	42, 58 106/122, 155	
	TX Mode_IEEE 802.11ac (VHT160) TX Mode_IEEE 802.11ax (HEW160)	50 114	
Output Power	TX Mode_IEEE 802.11a	36/40/48	-
	TX Mode_IEEE 802.11n (HT20) TX Mode_IEEE 802.11ac (VHT20) TX Mode_IEEE 802.11ax (HEW20)	52/60/64 100/116/140 149/157/165	
	TX Mode_IEEE 802.11n (HT40) TX Mode_IEEE 802.11ac (VHT40) TX Mode_IEEE 802.11ax (HEW40)	38/46/ 54/62 102/110/134 151/159	
	TX Mode_IEEE 802.11ac (VHT80) TX Mode_IEEE 802.11ax (HEW80)	42, 58 106/122, 155	
	TX Mode_IEEE 802.11ac (VHT160)	50	
	TX Mode_IEEE 802.11ax (HEW160)	114	

NOTE:

- (1) The Radiated emissions test was verified based on the worst conducted power and Bandwidth test results reported in the original report.
- (2) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.
- (3) All X, Y and Z axes are evaluated, but only the worst case (X axis) is recorded.
- (4) There were no emissions found below 30 MHz within 20 dB of the limit.
- (5) All adapter are evaluated, the KSA-36W-120300HU is the worst and recorded as below test data.

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

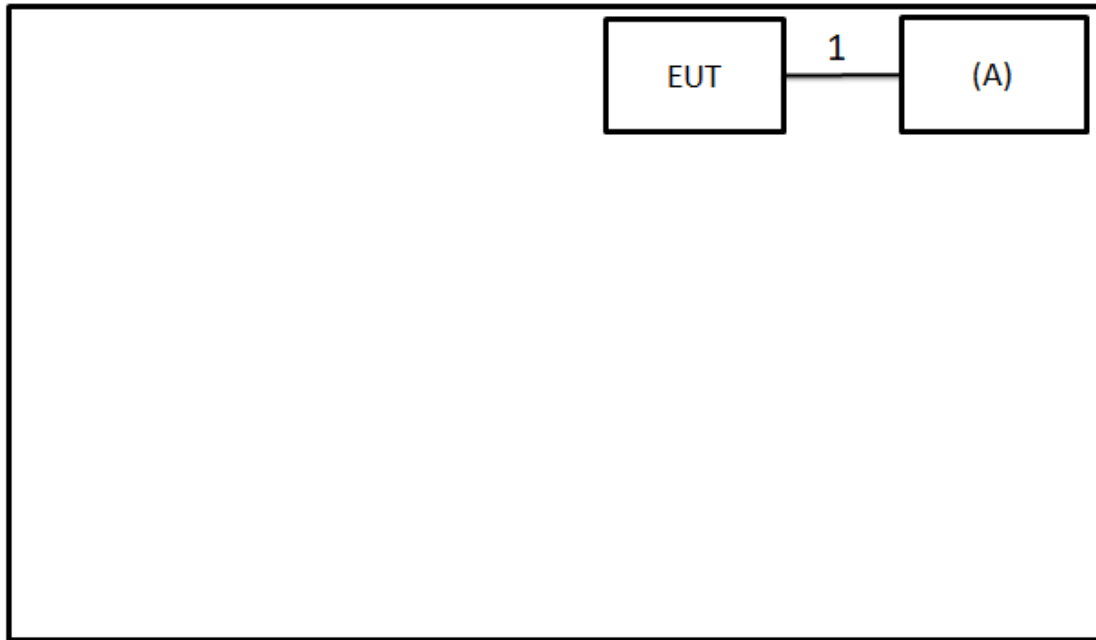

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Adapter	Ktec	KSA-36W-120300HU	N/A	Supplied by test requester.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N/A	N/A	1.5m	Power cable	Supplied by test requester.

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

Reading Level		Correct Factor		Measurement Value
38.22	+	3.45	=	41.67

Measurement Value		Limit Value		Margin Level
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

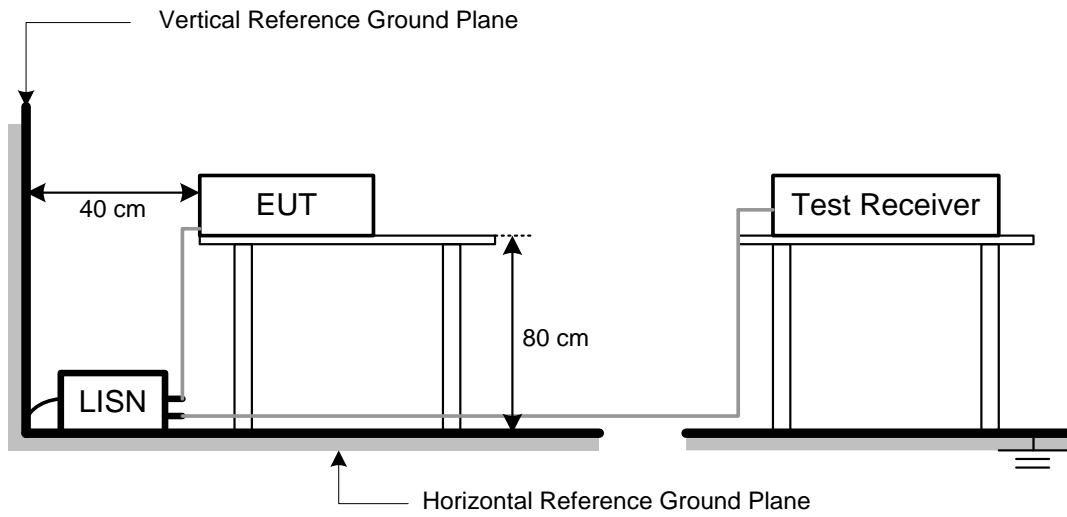

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 (NOTE 2)	68.3
	10 (NOTE 2)	105.3
	15.6 (NOTE 2)	110.9
	27 (NOTE 2)	122.3

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

(2) According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level		Correct Factor		Measurement Value
36.23	+	-11.97	=	24.26

Measurement Value		Limit Value		Margin Level
24.26	-	40	=	-15.74

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.

4.3 DEVIATION FROM TEST STANDARD


No deviation.

4.4 TEST SETUP

30 MHz to 1 GHz

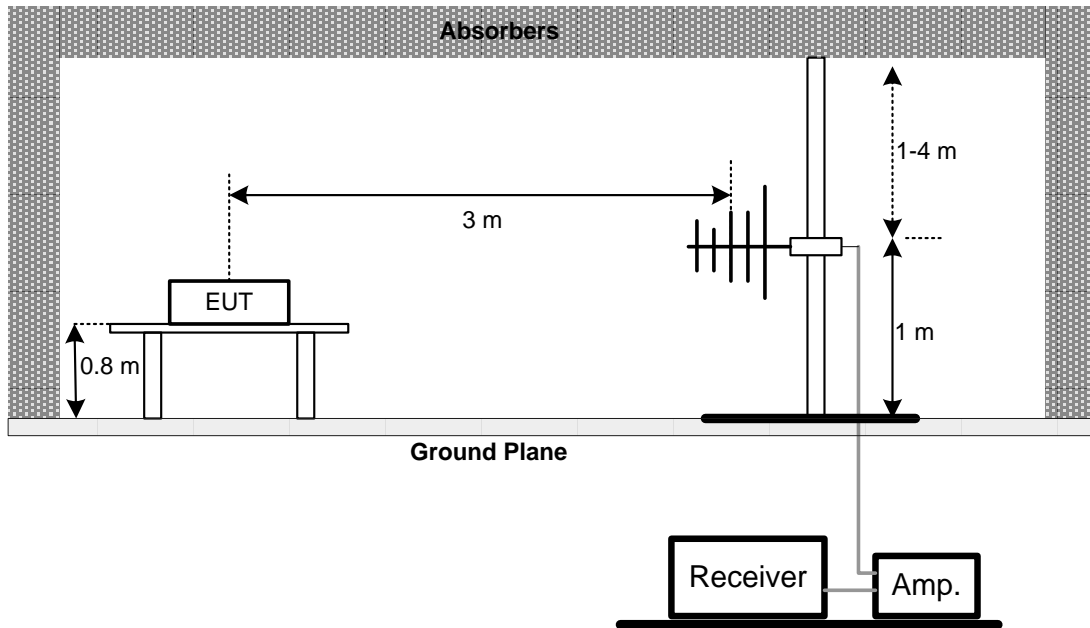

Above 1 GHz

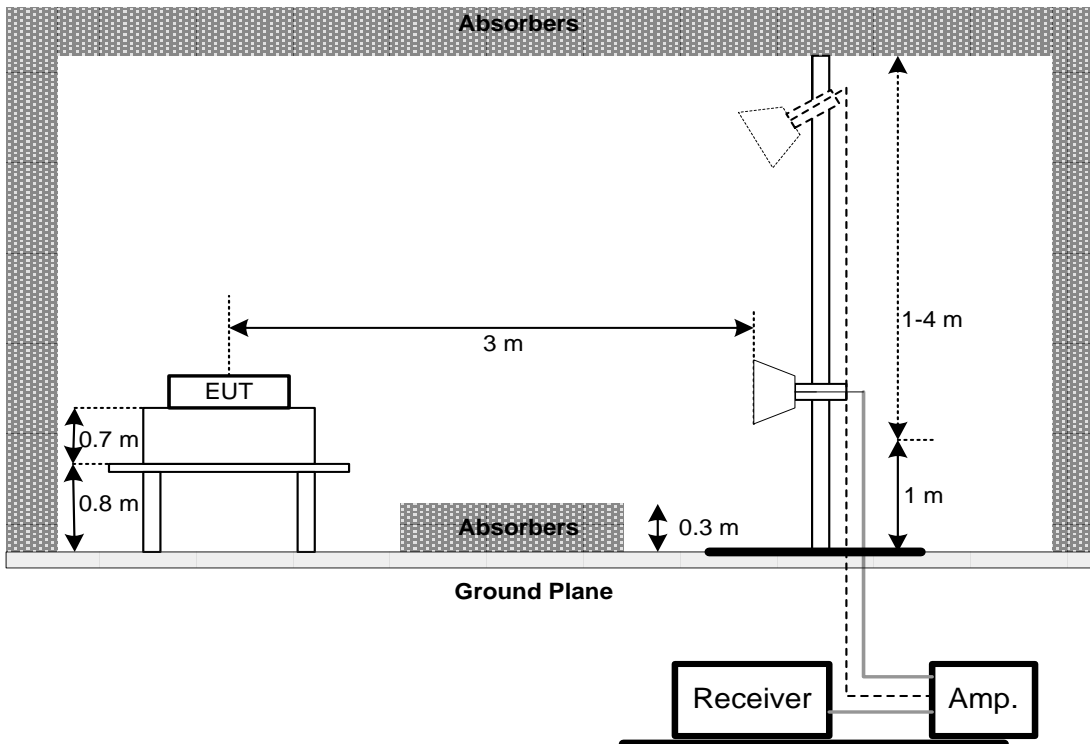

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX B.

4.7 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX C.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 BANDWIDTH TEST

5.1 LIMIT

FCC Part15, Subpart E (15.407)		
Section	Test Item	Frequency Range (MHz)
15.407(a)	26 dB Bandwidth	5150-5250
		5250-5350
		5470-5725
	Minimum 500 kHz 6 dB Bandwidth	5725-5850

5.2 TEST PROCEDURE


- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 26 dB Bandwidth
RBW	300 kHz(Bandwidth 20 MHz) 1 MHz(Bandwidth 40 MHz and 80 MHz)
VBW	1 MHz(Bandwidth 20 MHz) 3 MHz(Bandwidth 40 MHz and 80 MHz)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 TEST SETUP

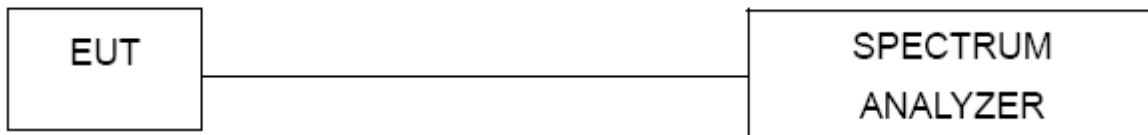

5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT

Please refer to the APPENDIX D.

6 OUTPUT POWER TEST

6.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Maximum Output Power	Fixed:1 Watt (30 dBm) Mobile and portable: 250 mW (24 dBm)	5150-5250
		250 mW (24 dBm)	5250-5350
			5470-5725
		1 Watt (30dBm)	5725-5850

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW(21 dBm).

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- b. Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz
VBW	≥ 3 MHz
Detector	RMS
Trace	Max Hold
Sweep Time	auto

- c. The maximum peak conducted output power was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

6.3 DEVIATION FROM TEST STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULT

Please refer to the APPENDIX E.

7 POWER SPECTRAL DENSITY

7.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Power Spectral Density	Other than Mobile and portable: 17 dBm/MHz	5150-5250
		Mobile and portable: 11 dBm/MHz	
		11 dBm/MHz	5250-5350
		30 dBm/500 kHz	5470-5725
			5725-5850

7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz
VBW	≥ 3 MHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM TEST STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULT

Please refer to the APPENDIX F.

8 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	2020/6/11	2021/6/11
2	Test Cable	EMCI	EMC400-BM-BM-5000	170501	2019/8/15	2020/8/14
3	EMI Test Receiver	R&S	ESR7	101433	2019/12/13	2020/12/11
4	Measurement Software	EZ	EZ_EMCI (Version NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC02325B	980217	2020/4/10	2021/4/9
2	Preamplifier	EMCI	EMC012645B	980267	2020/4/10	2021/4/9
3	Preamplifier	EMCI	EMC2654045	980030	2020/1/31	2021/1/30
4	Test Cable	EMCI	EMC104-SM-SM-800	150207	2020/4/10	2021/4/9
5	Test Cable	EMCI	EMC104-SM-SM-3000	151205	2020/4/10	2021/4/9
6	Test Cable	EMCI	EMC-SM-SM-7000	180408	2020/4/10	2021/4/9
7	MXE EMI Receiver	Agilent	N9038A	MY554200087	2020/6/10	2021/6/9
8	Signal Analyzer	Agilent	N9010A	MY56480554	2020/6/4	2021/6/3
9	Horn Ant	SCHWARZBECK	BBHA 9120D	9120D-1342	2020/6/12	2021/6/11
10	Horn Ant	Schwarzbeck	BBHA 9170	187	2019/12/21	2020/12/20
11	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	0992	2020/7/10	2021/7/9
12	5dB Attenuator	EMCI	EMCI-N-0-625	AT-N0508	2020/7/10	2021/7/9

Bandwidth						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 40	100129	2020/6/15	2021/6/14

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Power Meter	Keysight	8990B	MY51000517	2020/4/6	2021/4/5
2	Power Sensor	Keysight	N1923A	MY58310005	2020/4/6	2021/4/5

Power Spectral Density						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 40	100129	2020/6/15	2021/6/14

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

9 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2006T060-FCCP-1 (APPENDIX-TEST PHOTOS).

10 EUT PHOTOS

Please refer to document Appendix No.: EP-2006T060-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2020/7/3
Test Frequency	-	Phase	Line

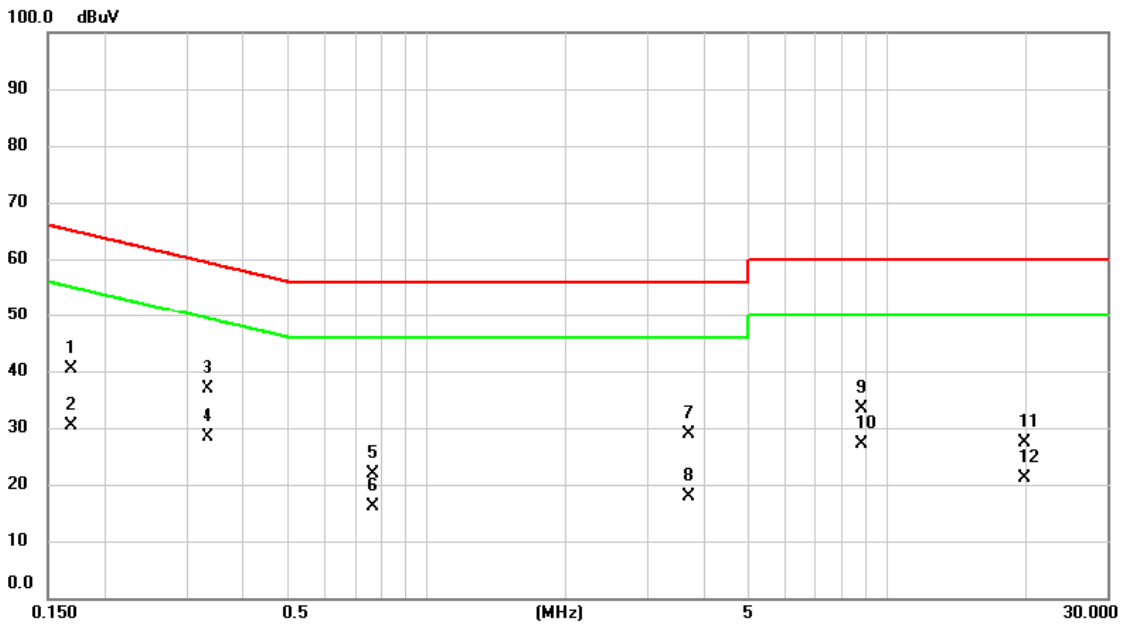


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1680	30.61	9.67	40.28	65.06	-24.78	QP	
2		0.1680	20.80	9.67	30.47	55.06	-24.59	AVG	
3		0.3344	27.12	9.71	36.83	59.34	-22.51	QP	
4	*	0.3344	18.72	9.71	28.43	49.34	-20.91	AVG	
5		0.7642	12.18	9.72	21.90	56.00	-34.10	QP	
6		0.7642	6.48	9.72	16.20	46.00	-29.80	AVG	
7		3.6870	19.05	9.81	28.86	56.00	-27.14	QP	
8		3.6870	8.19	9.81	18.00	46.00	-28.00	AVG	
9		8.7922	23.43	9.92	33.35	60.00	-26.65	QP	
10		8.7922	17.10	9.92	27.02	50.00	-22.98	AVG	
11		19.8037	17.35	10.02	27.37	60.00	-32.63	QP	
12		19.8037	11.06	10.02	21.08	50.00	-28.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2020/7/3
Test Frequency	-	Phase	Neutral

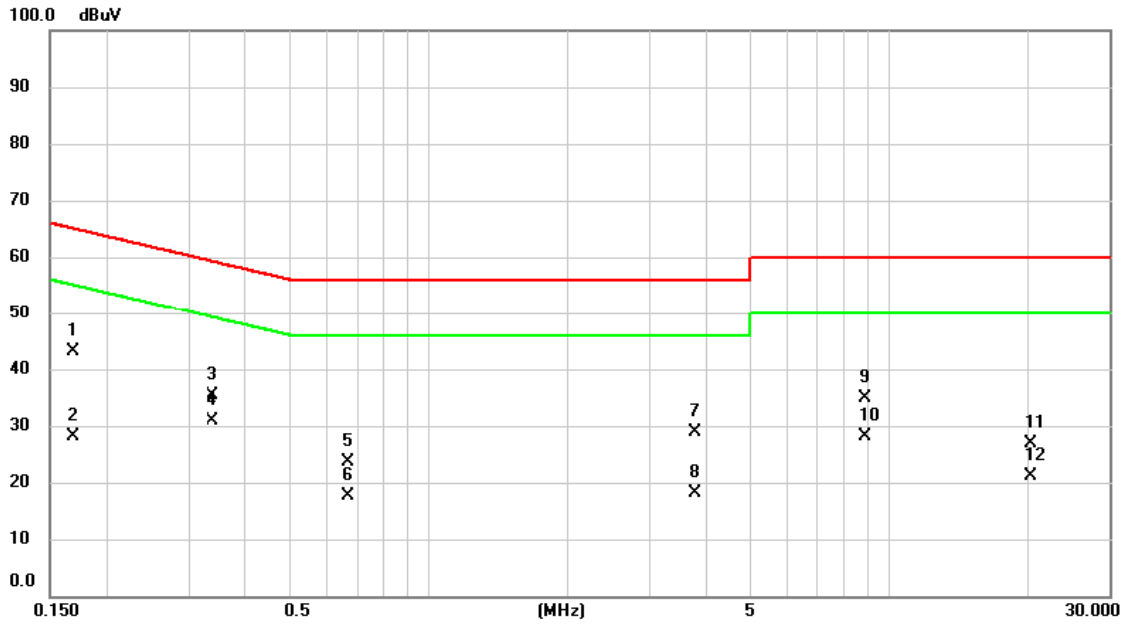


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1680	33.53	9.67	43.20	65.06	-21.86	QP	
2		0.1680	18.54	9.67	28.21	55.06	-26.85	AVG	
3		0.3390	25.70	9.71	35.41	59.23	-23.82	QP	
4	*	0.3390	21.23	9.71	30.94	49.23	-18.29	AVG	
5		0.6697	13.99	9.72	23.71	56.00	-32.29	QP	
6		0.6697	7.92	9.72	17.64	46.00	-28.36	AVG	
7		3.7793	19.03	9.81	28.84	56.00	-27.16	QP	
8		3.7793	8.22	9.81	18.03	46.00	-27.97	AVG	
9		8.8418	25.00	9.92	34.92	60.00	-25.08	QP	
10		8.8418	18.30	9.92	28.22	50.00	-21.78	AVG	
11		20.2988	16.98	10.02	27.00	60.00	-33.00	QP	
12		20.2988	11.08	10.02	21.10	50.00	-28.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2020/7/3
Test Frequency	-	Phase	Line

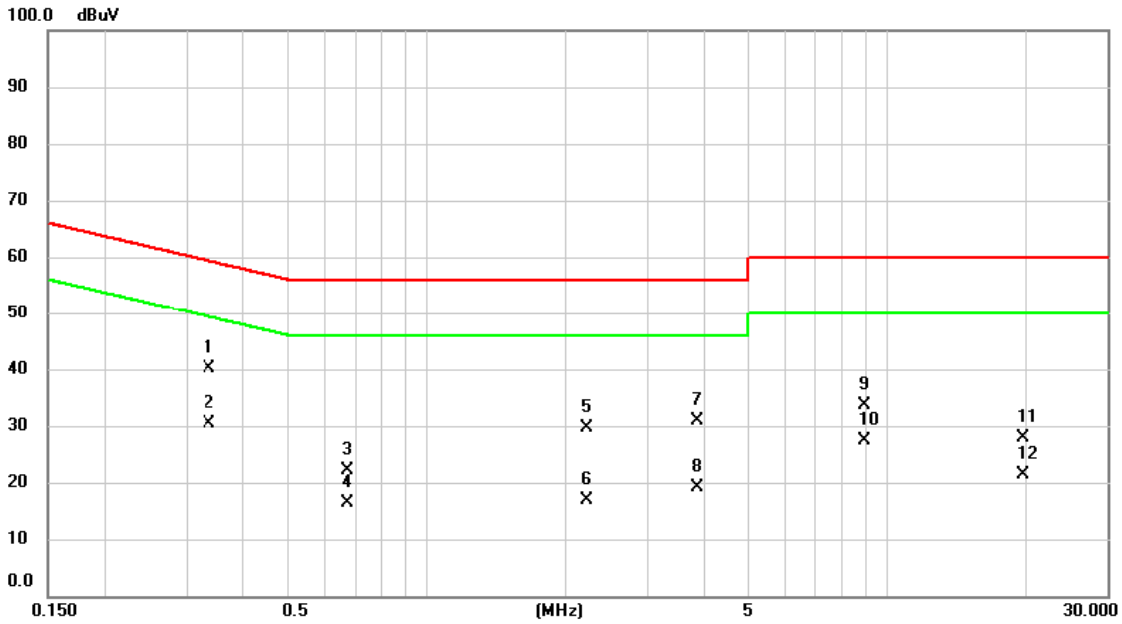


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3367	30.35	9.71	40.06	59.28	-19.22	QP	
2	*	0.3367	20.79	9.71	30.50	49.28	-18.78	AVG	
3		0.6720	12.53	9.72	22.25	56.00	-33.75	QP	
4		0.6720	6.76	9.72	16.48	46.00	-29.52	AVG	
5		2.2222	19.94	9.76	29.70	56.00	-26.30	QP	
6		2.2222	7.15	9.76	16.91	46.00	-29.09	AVG	
7		3.8580	21.18	9.81	30.99	56.00	-25.01	QP	
8		3.8580	9.27	9.81	19.08	46.00	-26.92	AVG	
9		8.9520	23.68	9.92	33.60	60.00	-26.40	QP	
10		8.9520	17.37	9.92	27.29	50.00	-22.71	AVG	
11		19.6372	17.84	10.02	27.86	60.00	-32.14	QP	
12		19.6372	11.35	10.02	21.37	50.00	-28.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2020/7/3
Test Frequency	-	Phase	Neutral

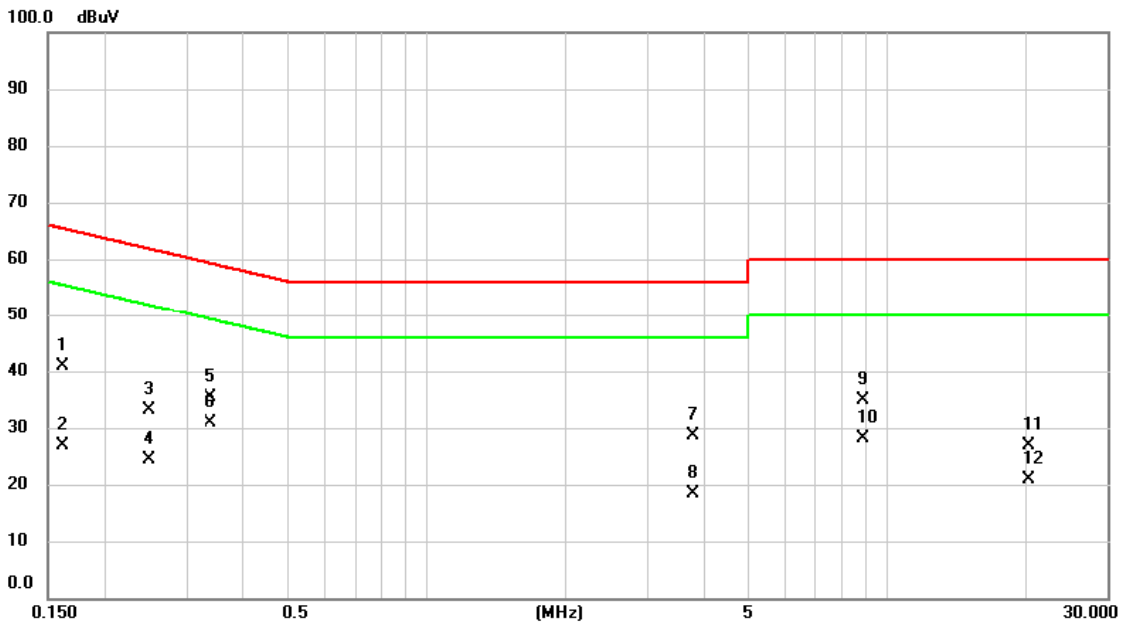

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1613	31.21	9.67	40.88	65.40	-24.52	QP	
2		0.1613	17.12	9.67	26.79	55.40	-28.61	AVG	
3		0.2490	23.42	9.66	33.08	61.79	-28.71	QP	
4		0.2490	14.69	9.66	24.35	51.79	-27.44	AVG	
5		0.3390	25.71	9.71	35.42	59.23	-23.81	QP	
6	*	0.3390	21.22	9.71	30.93	49.23	-18.30	AVG	
7		3.7793	18.83	9.81	28.64	56.00	-27.36	QP	
8		3.7793	8.68	9.81	18.49	46.00	-27.51	AVG	
9		8.8440	24.93	9.92	34.85	60.00	-25.15	QP	
10		8.8440	18.21	9.92	28.13	50.00	-21.87	AVG	
11		20.2830	16.78	10.02	26.80	60.00	-33.20	QP	
12		20.2830	10.96	10.02	20.98	50.00	-29.02	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	Non-Beamforming mode
-----------	----------------------

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/7
Test Frequency	5510	Polarization	Vertical
Temp	22°C	Hum.	61%

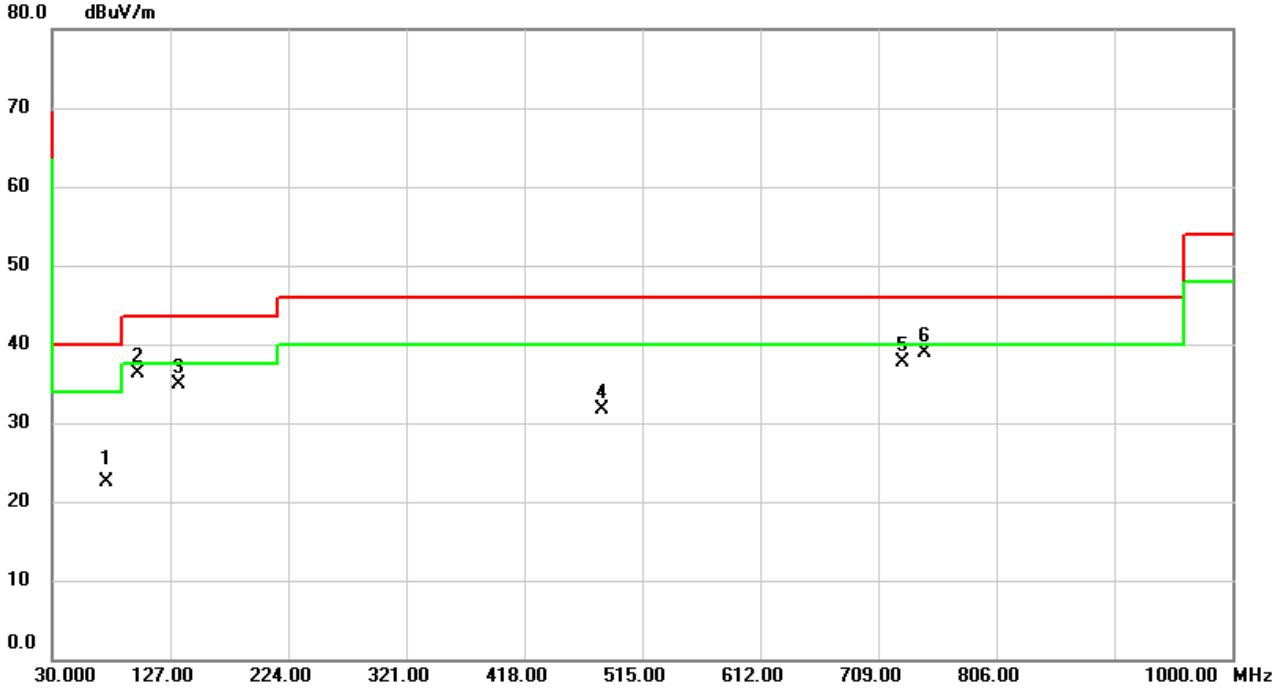


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		74.6200	34.19	-11.73	22.46	40.00	-17.54	QP	
2		100.8100	49.17	-12.80	36.37	43.50	-7.13	peak	
3		133.7900	44.43	-9.59	34.84	43.50	-8.66	peak	
4		482.0200	34.75	-3.12	31.63	46.00	-14.37	peak	
5		729.3700	35.95	1.72	37.67	46.00	-8.33	peak	
6	*	746.8300	36.84	2.07	38.91	46.00	-7.09	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/7
Test Frequency	5510	Polarization	Horizontal
Temp	22°C	Hum.	61%

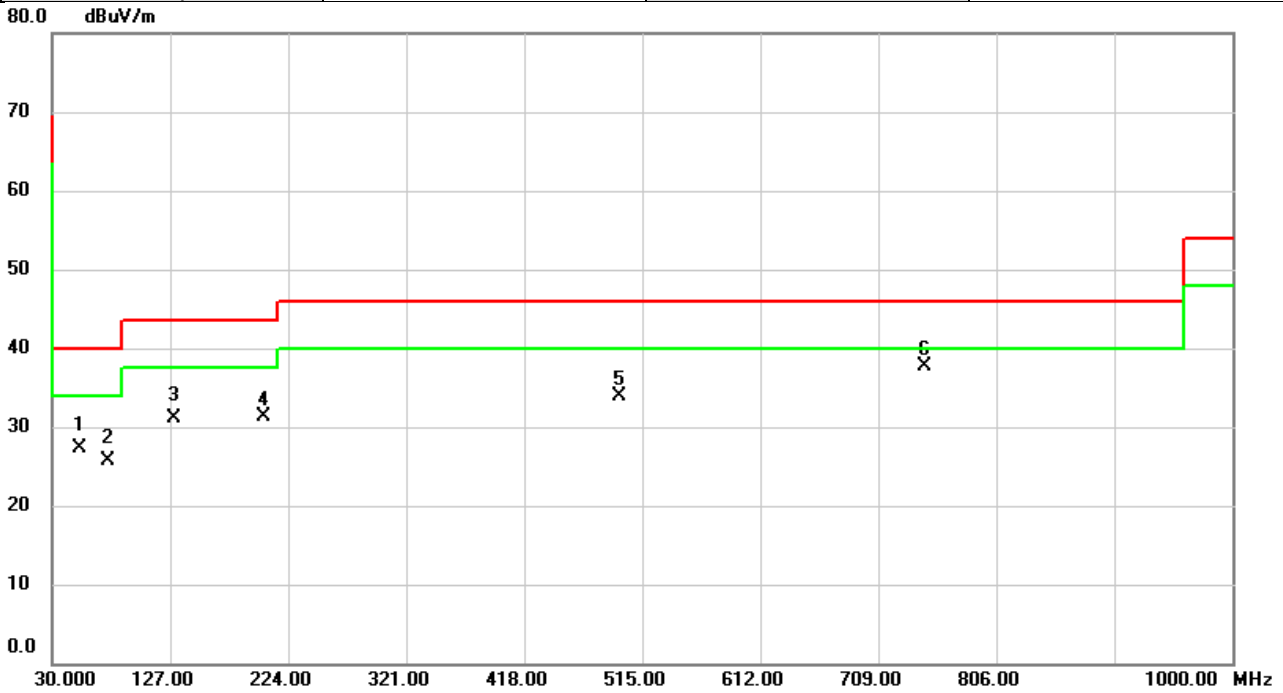


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		52.3100	35.17	-7.82	27.35	40.00	-12.65	QP	
2		75.5900	37.66	-11.95	25.71	40.00	-14.29	QP	
3		129.9100	41.16	-10.06	31.10	43.50	-12.40	QP	
4		203.6300	42.07	-10.81	31.26	43.50	-12.24	peak	
5		496.5700	36.84	-2.90	33.94	46.00	-12.06	peak	
6	*	746.8300	35.56	2.07	37.63	46.00	-8.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Beamforming mode
-----------	------------------

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/7
Test Frequency	5670	Polarization	Vertical
Temp	22°C	Hum.	61%

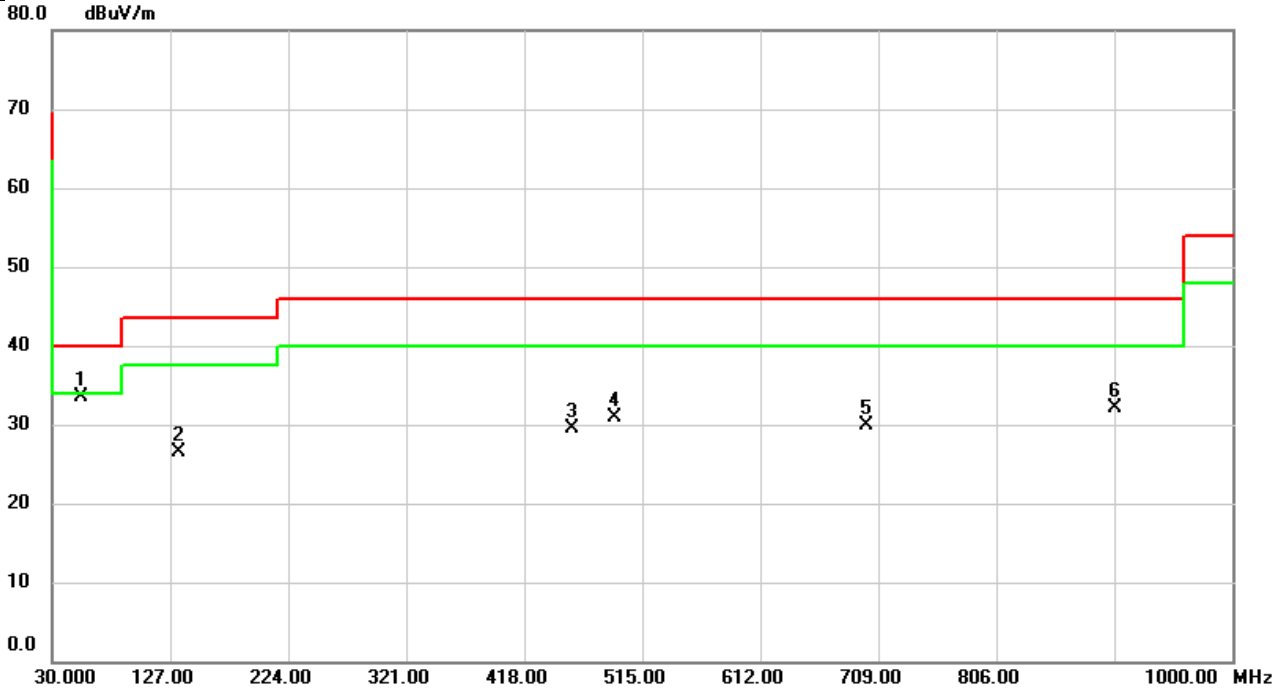


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	53.2800	41.51	-7.91	33.60	40.00	-6.40	peak	
2		133.7900	36.04	-9.59	26.45	43.50	-17.05	peak	
3		457.7700	32.97	-3.48	29.49	46.00	-16.51	peak	
4		491.7200	33.79	-2.98	30.81	46.00	-15.19	peak	
5		699.3000	28.77	1.10	29.87	46.00	-16.13	peak	
6		903.9700	28.27	3.91	32.18	46.00	-13.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/7
Test Frequency	5670	Polarization	Horizontal
Temp	22°C	Hum.	61%

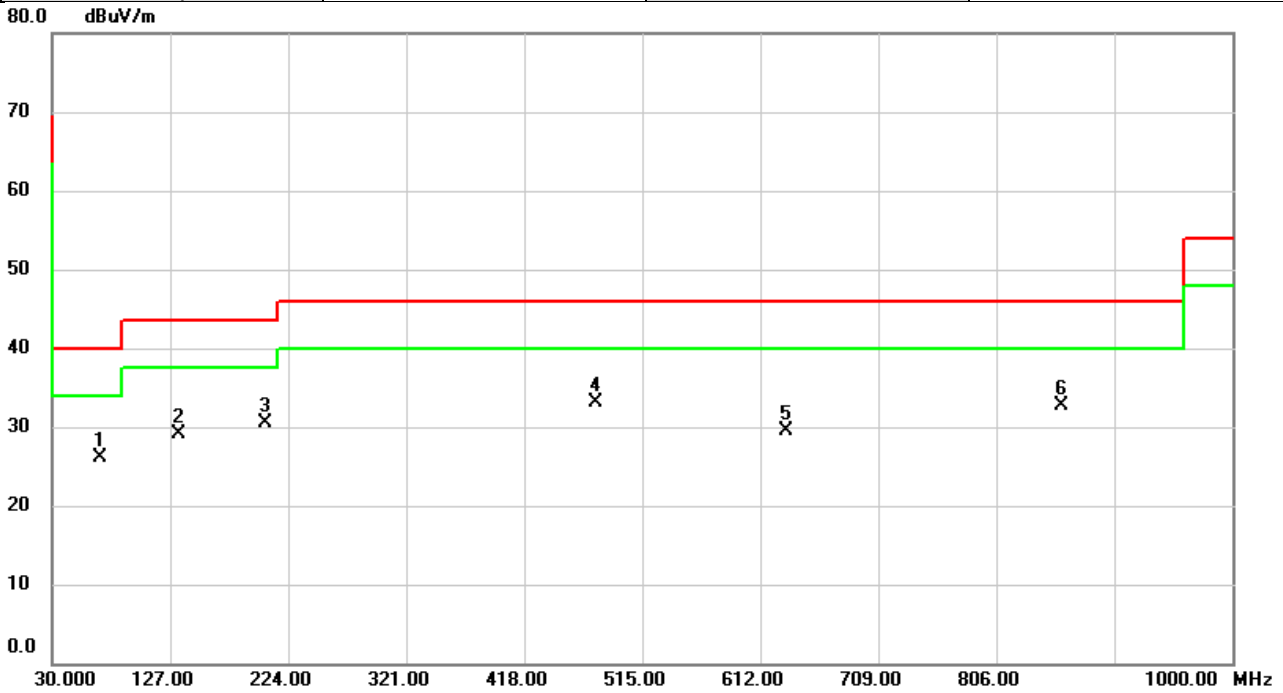

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		69.7700	36.77	-10.62	26.15	40.00	-13.85	peak	
2		133.7900	38.68	-9.59	29.09	43.50	-14.41	peak	
3		204.6000	41.29	-10.80	30.49	43.50	-13.01	peak	
4	*	476.2000	36.39	-3.20	33.19	46.00	-12.81	peak	
5		633.3400	29.54	-0.02	29.52	46.00	-16.48	peak	
6		859.3500	29.36	3.33	32.69	46.00	-13.31	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	Non-Beamforming mode
-----------	----------------------

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5180	Polarization	Vertical
Temp	20°C	Hum.	53%

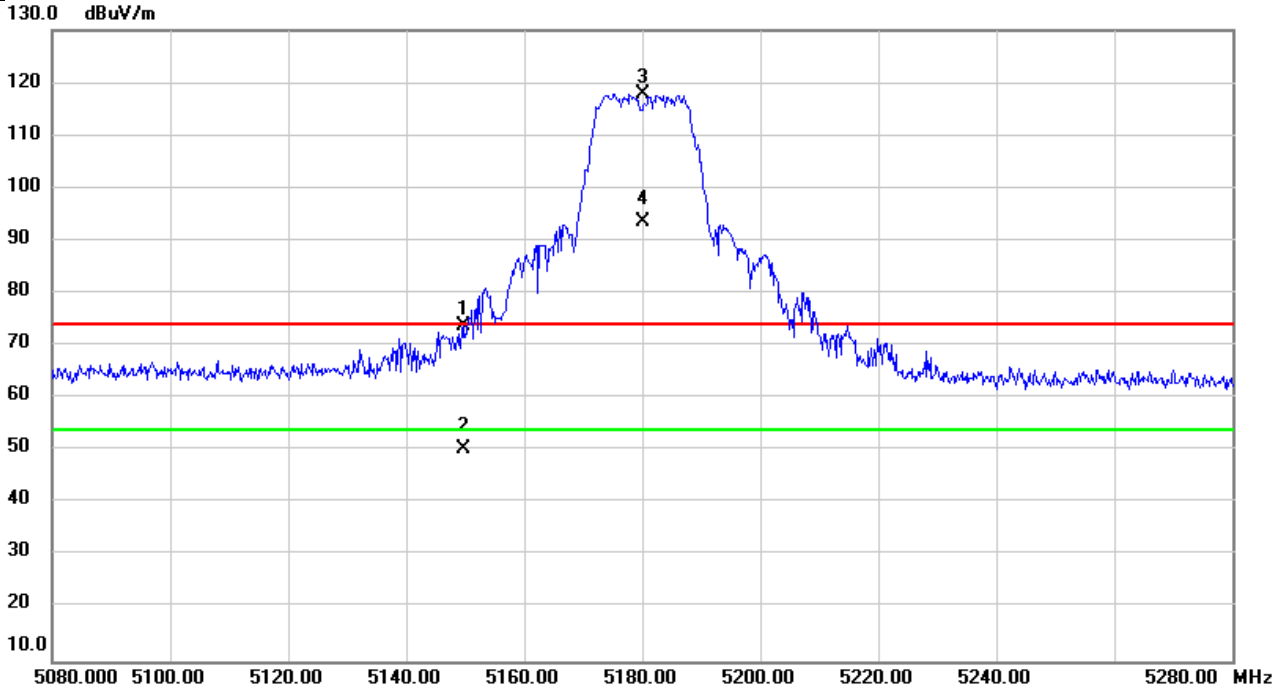


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5149.600	36.39	37.40	73.79	74.00	-0.21	peak	
2		5149.600	12.80	37.40	50.20	54.00	-3.80	AVG	
3	*	5180.000	80.32	37.43	117.75	74.00	43.75	peak	NoLimit
4	X	5180.000	56.14	37.43	93.57	54.00	39.57	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5240	Polarization	Vertical
Temp	20°C	Hum.	53%

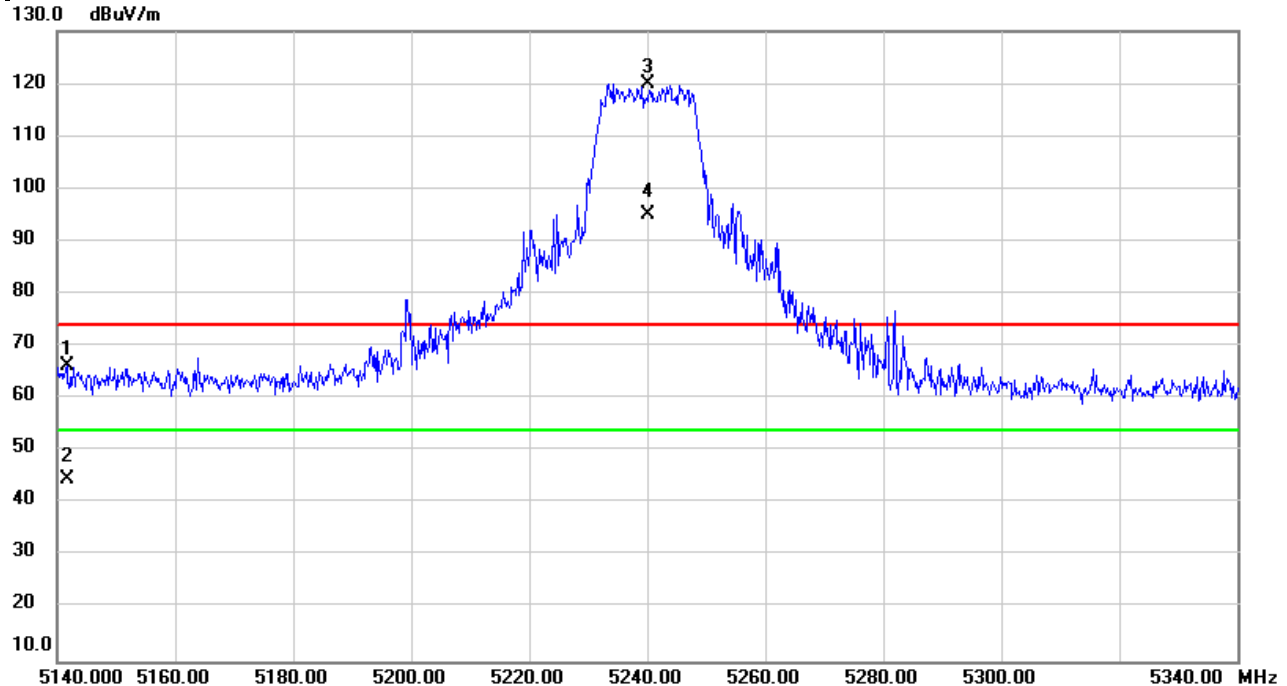

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5141.600	28.77	37.39	66.16	74.00	-7.84	peak	
2		5141.600	7.23	37.39	44.62	54.00	-9.38	AVG	
3	*	5240.000	82.44	37.48	119.92	74.00	45.92	peak	NoLimit
4	X	5240.000	57.68	37.48	95.16	54.00	41.16	AVG	NoLimit

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5260	Polarization	Vertical
Temp	20°C	Hum.	53%

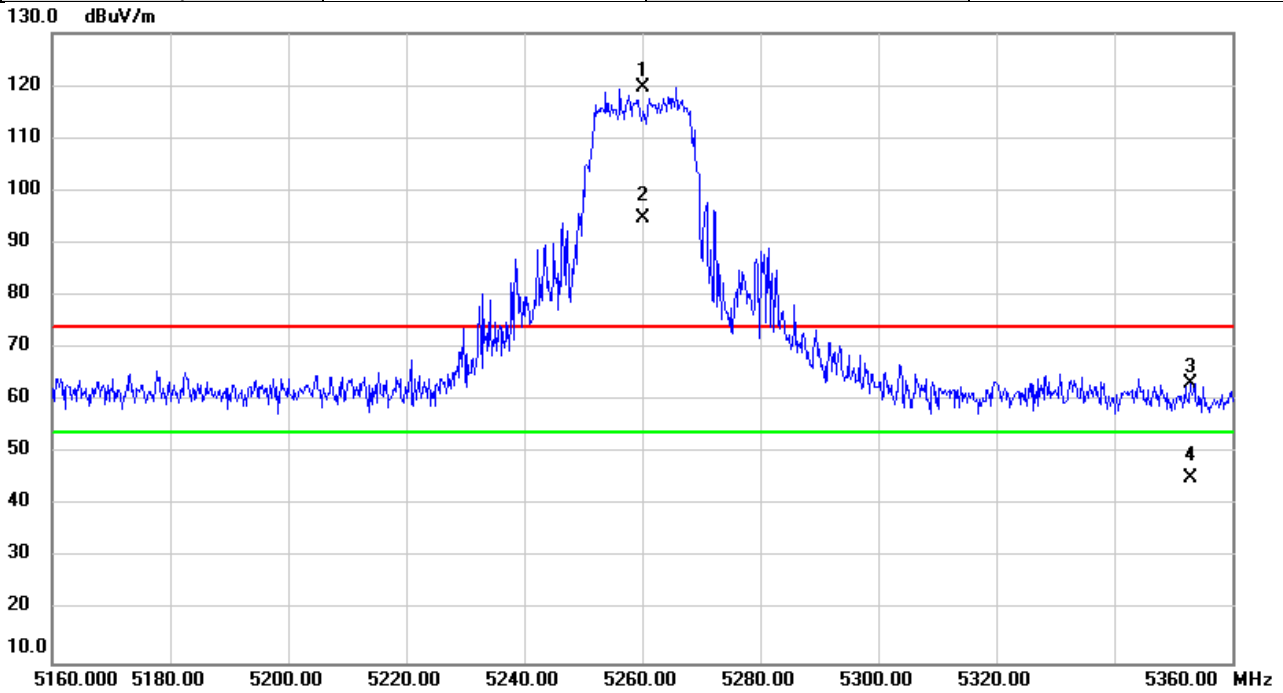


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5260.000	82.15	37.50	119.65	74.00	45.65	peak	NoLimit
2	X	5260.000	57.20	37.50	94.70	54.00	40.70	AVG	NoLimit
3		5352.800	25.66	37.58	63.24	74.00	-10.76	peak	
4		5352.800	7.76	37.58	45.34	54.00	-8.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5320	Polarization	Vertical
Temp	20°C	Hum.	53%

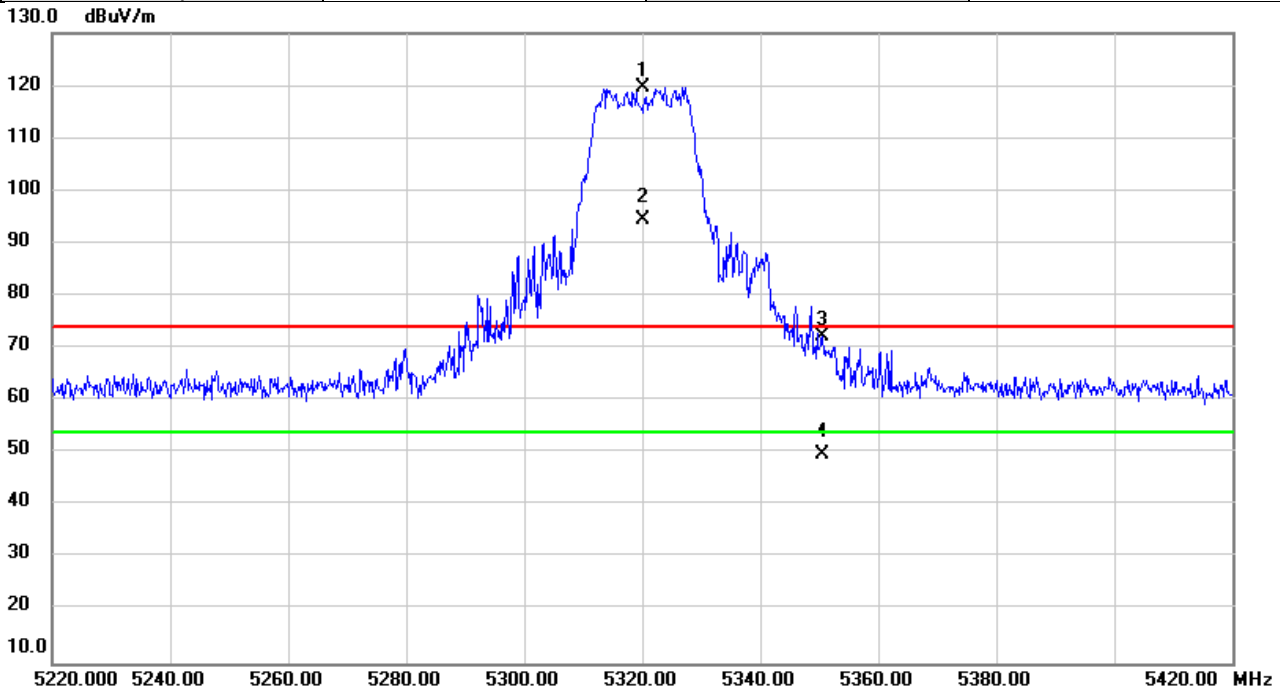


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5320.000	82.17	37.55	119.72	74.00	45.72	peak	NoLimit
2	X	5320.000	56.89	37.55	94.44	54.00	40.44	AVG	NoLimit
3		5350.600	34.63	37.58	72.21	74.00	-1.79	peak	
4		5350.600	12.32	37.58	49.90	54.00	-4.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5500	Polarization	Vertical
Temp	20°C	Hum.	53%

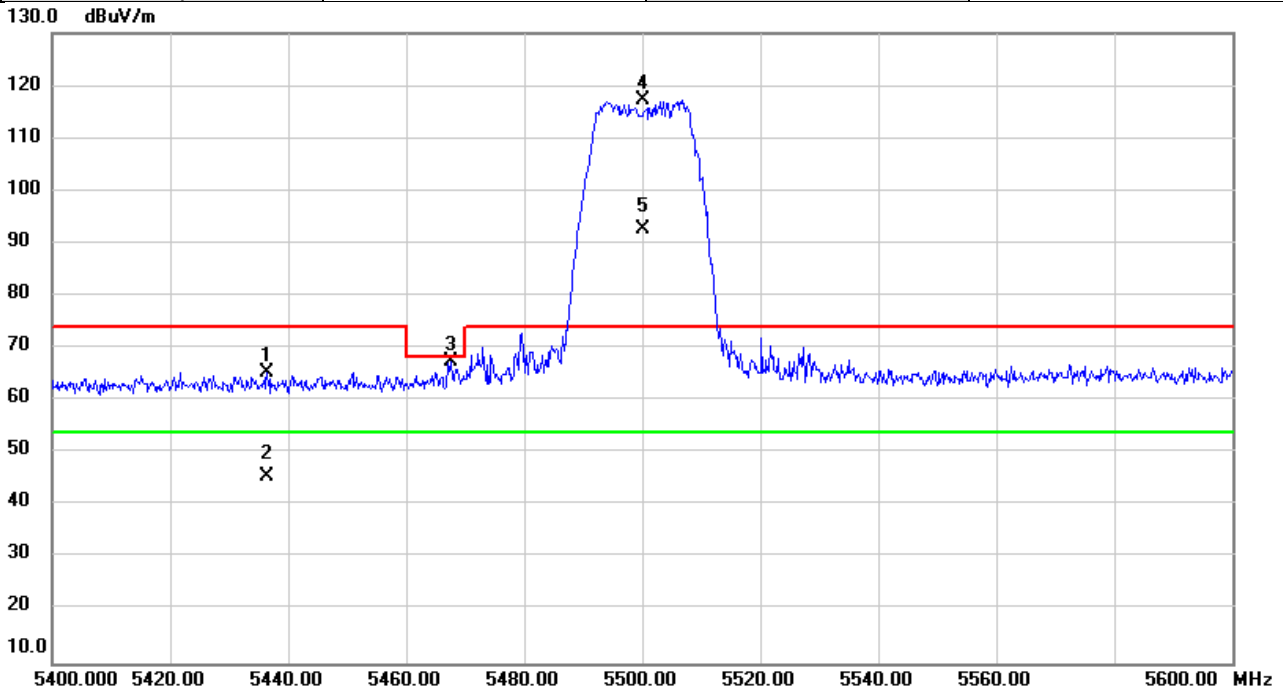


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5436.400	27.82	37.65	65.47	74.00	-8.53	peak	
2		5436.400	7.85	37.65	45.50	54.00	-8.50	AVG	
3		5467.600	29.70	37.68	67.38	68.20	-0.82	peak	
4	*	5500.000	79.47	37.71	117.18	74.00	43.18	peak	NoLimit
5	X	5500.000	54.96	37.71	92.67	54.00	38.67	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5700	Polarization	Vertical
Temp	20°C	Hum.	53%

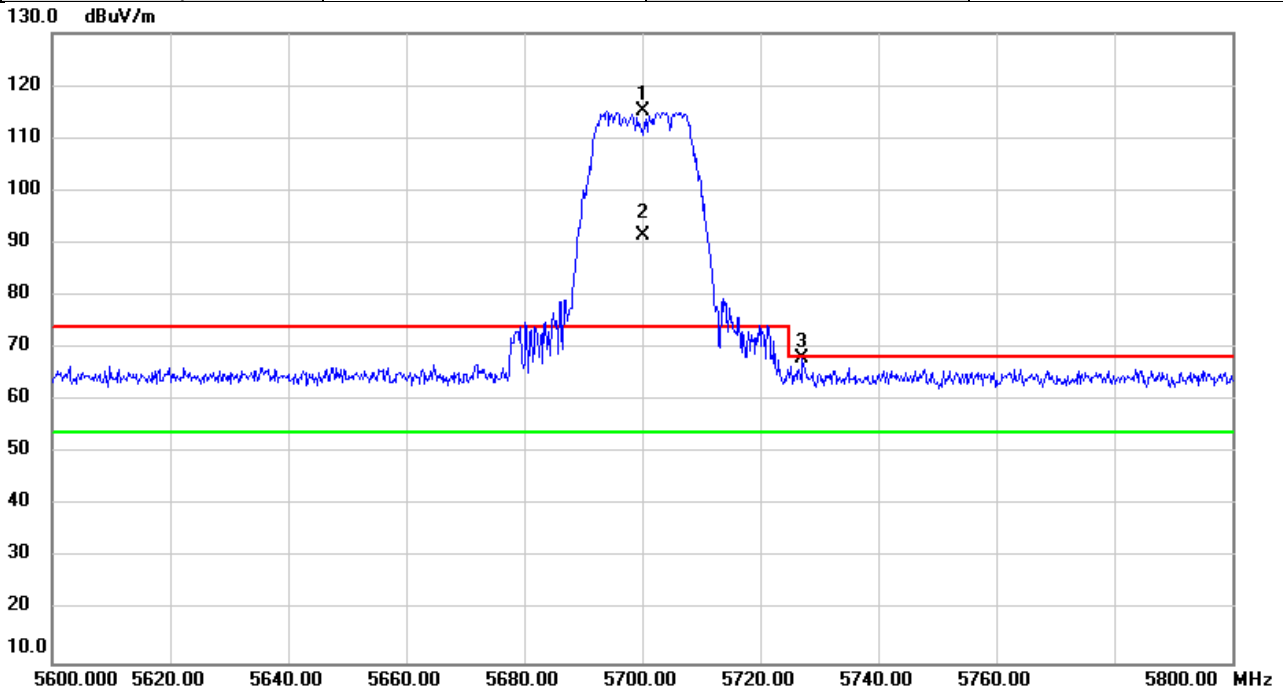


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5700.000	76.85	38.18	115.03	74.00	41.03	peak	NoLimit
2	X	5700.000	53.20	38.18	91.38	54.00	37.38	AVG	NoLimit
3		5727.200	29.81	38.24	68.05	68.20	-0.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5745	Polarization	Vertical
Temp	20°C	Hum.	53%

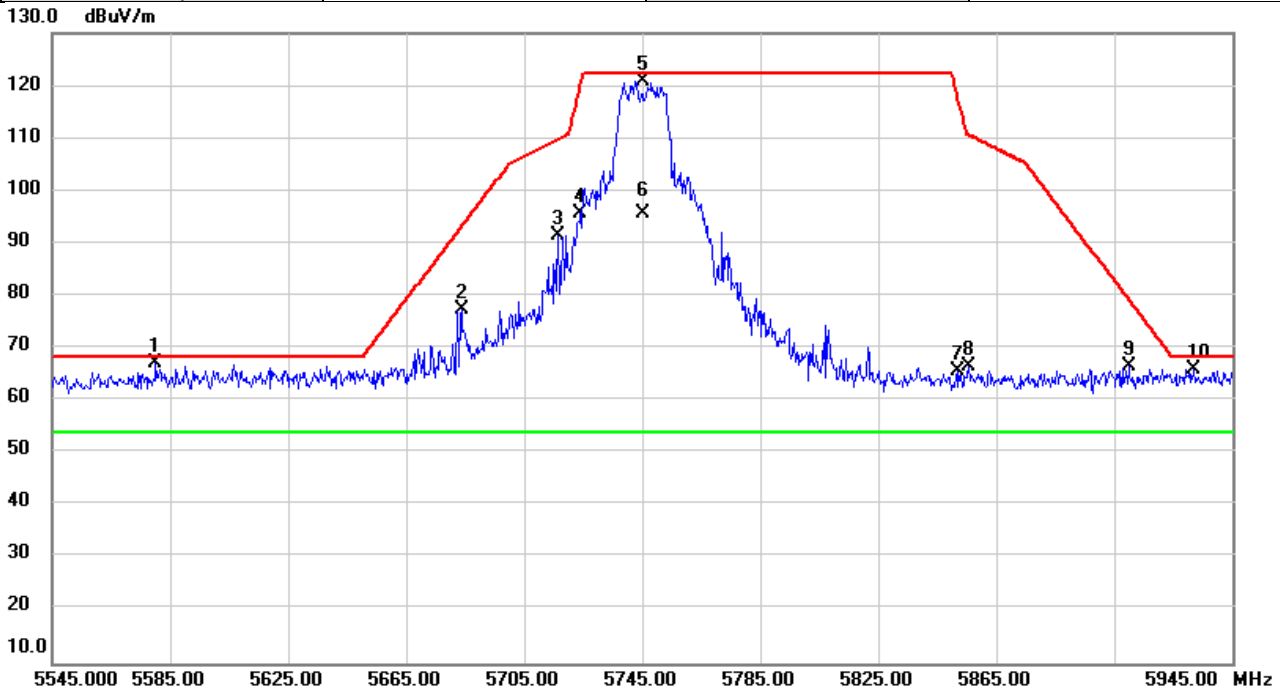


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5580.200	29.23	37.90	67.13	68.20	-1.07	peak	
2		5683.800	39.22	38.14	77.36	93.25	-15.89	peak	
3		5716.600	53.38	38.21	91.59	109.85	-18.26	peak	
4		5724.200	57.43	38.23	95.66	120.38	-24.72	peak	
5		5745.000	82.59	38.28	120.87	122.20	-1.33	peak	NoLimit
6	*	5745.000	57.33	38.28	95.61	54.00	41.61	AVG	NoLimit
7		5851.800	26.99	38.53	65.52	118.09	-52.57	peak	
8		5855.800	27.89	38.54	66.43	110.58	-44.15	peak	
9		5909.800	27.75	38.67	66.42	79.41	-12.99	peak	
10		5932.200	27.37	38.73	66.10	68.20	-2.10	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5825	Polarization	Vertical
Temp	20°C	Hum.	53%

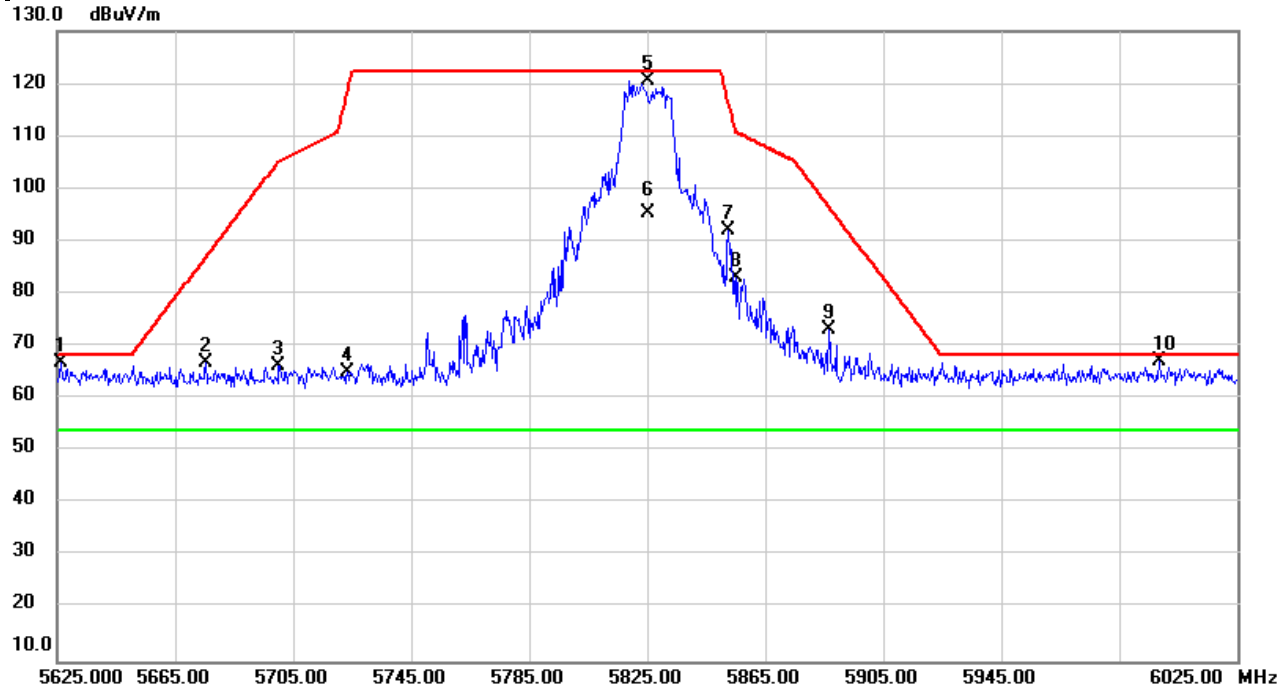


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5626.200	28.91	38.01	66.92	68.20	-1.28	peak	
2		5675.400	28.73	38.12	66.85	87.04	-20.19	peak	
3		5700.200	27.98	38.18	66.16	105.26	-39.10	peak	
4		5723.400	26.78	38.23	65.01	118.55	-53.54	peak	
5		5825.000	82.10	38.48	120.58	122.20	-1.62	peak	NoLimit
6	*	5825.000	56.81	38.48	95.29	54.00	41.29	AVG	NoLimit
7		5852.600	53.38	38.53	91.91	116.27	-24.36	peak	
8		5855.400	44.47	38.54	83.01	110.69	-27.68	peak	
9		5886.600	34.48	38.61	73.09	96.59	-23.50	peak	
10		5998.600	28.19	38.88	67.07	68.20	-1.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/24
Test Frequency	5180	Polarization	Vertical
Temp	20°C	Hum.	53%

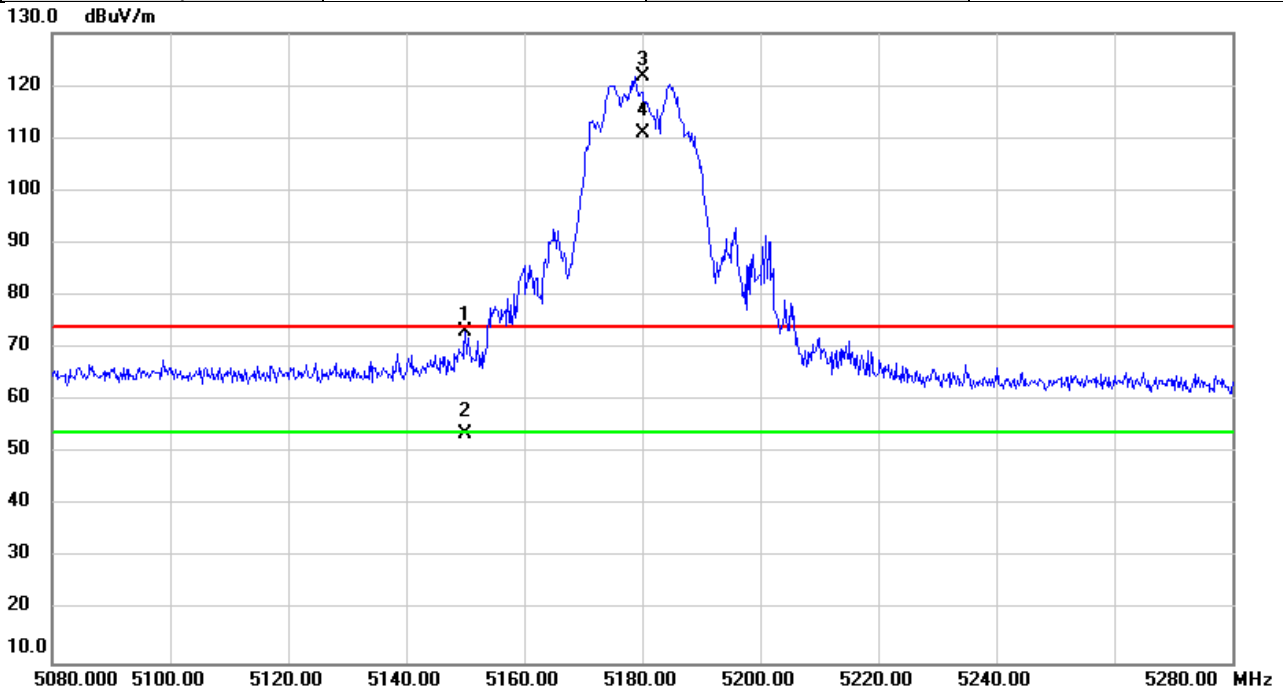


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5150.000	35.76	37.40	73.16	74.00	-0.84	peak	
2		5150.000	16.23	37.40	53.63	54.00	-0.37	AVG	
3	X	5180.000	84.31	37.43	121.74	74.00	47.74	peak	NoLimit
4	*	5180.000	73.63	37.43	111.06	54.00	57.06	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/24
Test Frequency	5240	Polarization	Vertical
Temp	20°C	Hum.	53%

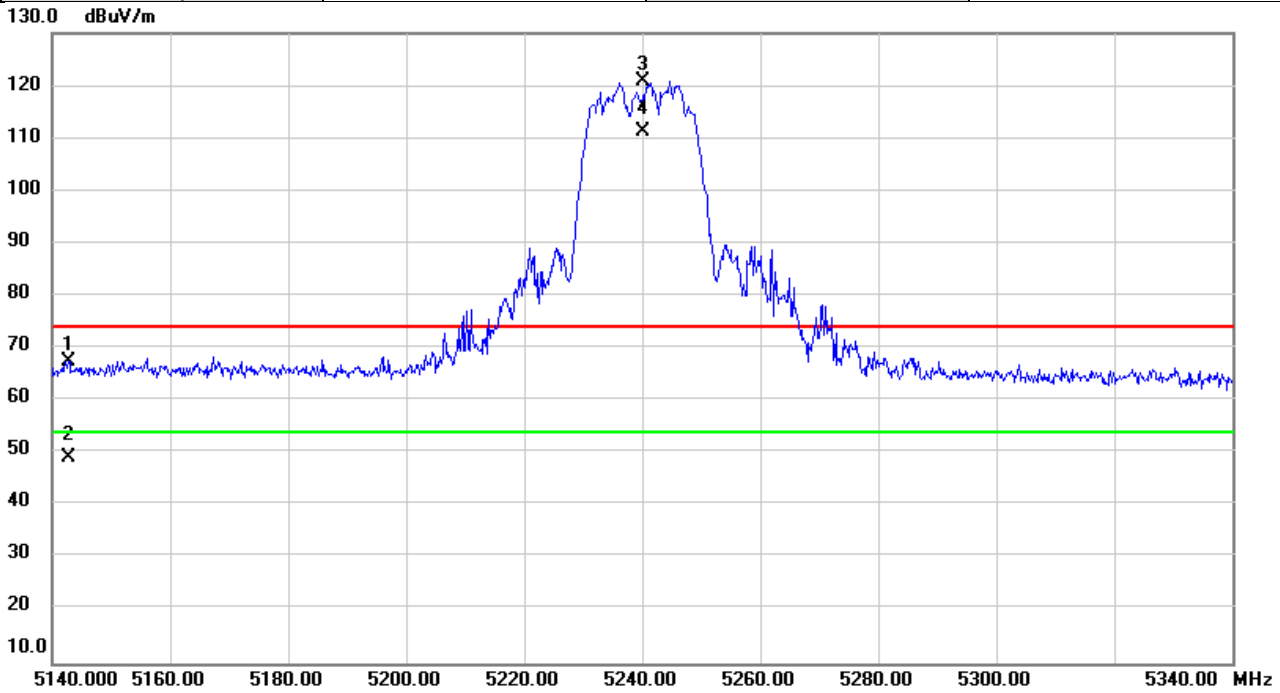


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5142.800	30.00	37.40	67.40	74.00	-6.60	peak	
2		5142.800	11.75	37.40	49.15	54.00	-4.85	AVG	
3	X	5240.000	83.23	37.48	120.71	74.00	46.71	peak	NoLimit
4	*	5240.000	73.89	37.48	111.37	54.00	57.37	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/24
Test Frequency	5260	Polarization	Vertical
Temp	20°C	Hum.	53%

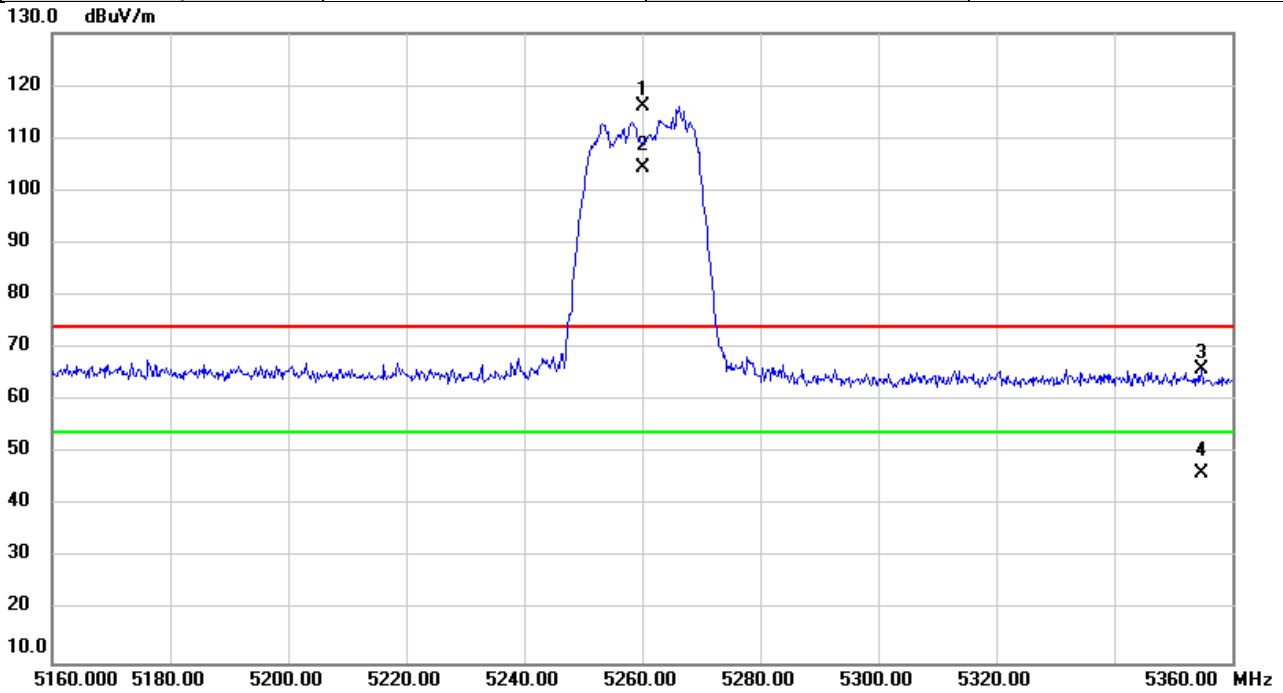


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5260.000	78.48	37.50	115.98	74.00	41.98	peak	NoLimit
2	*	5260.000	66.85	37.50	104.35	54.00	50.35	AVG	NoLimit
3		5354.800	28.39	37.58	65.97	74.00	-8.03	peak	
4		5354.800	8.44	37.58	46.02	54.00	-7.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/24
Test Frequency	5320	Polarization	Vertical
Temp	20°C	Hum.	53%

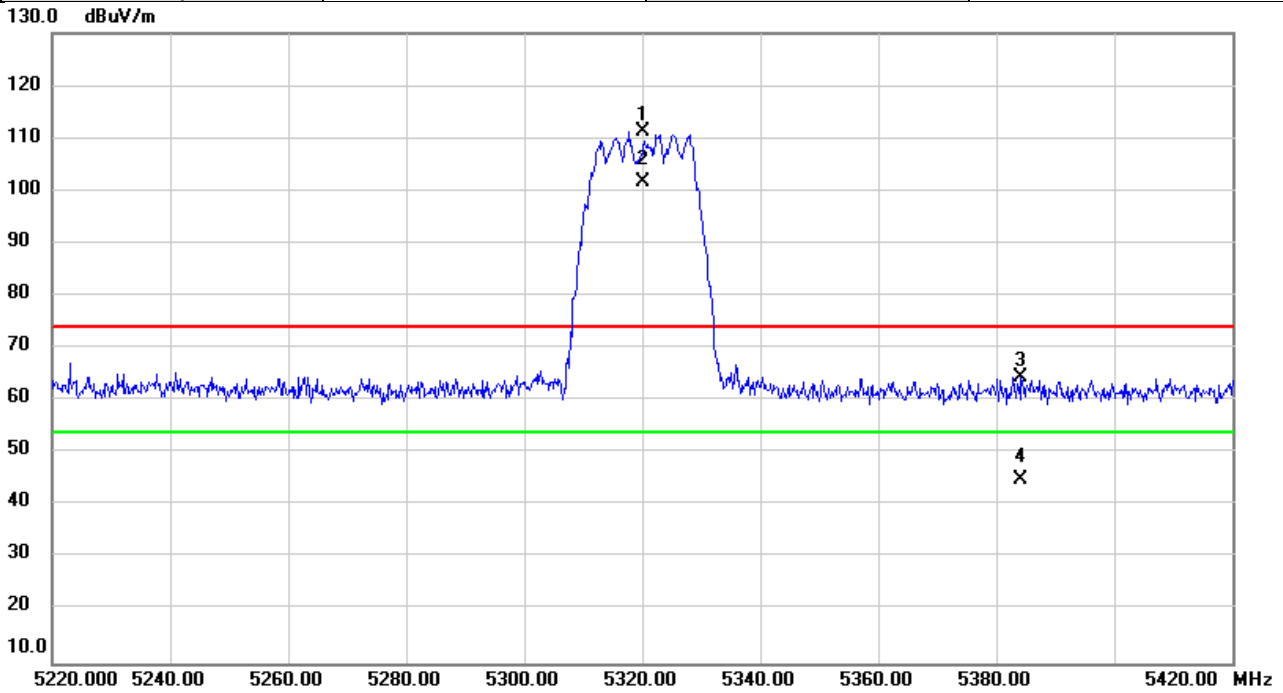


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5320.000	73.81	37.55	111.36	74.00	37.36	peak	NoLimit
2	*	5320.000	64.07	37.55	101.62	54.00	47.62	AVG	NoLimit
3		5384.200	26.84	37.61	64.45	74.00	-9.55	peak	
4		5384.200	7.41	37.61	45.02	54.00	-8.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/24
Test Frequency	5500	Polarization	Vertical
Temp	20°C	Hum.	53%

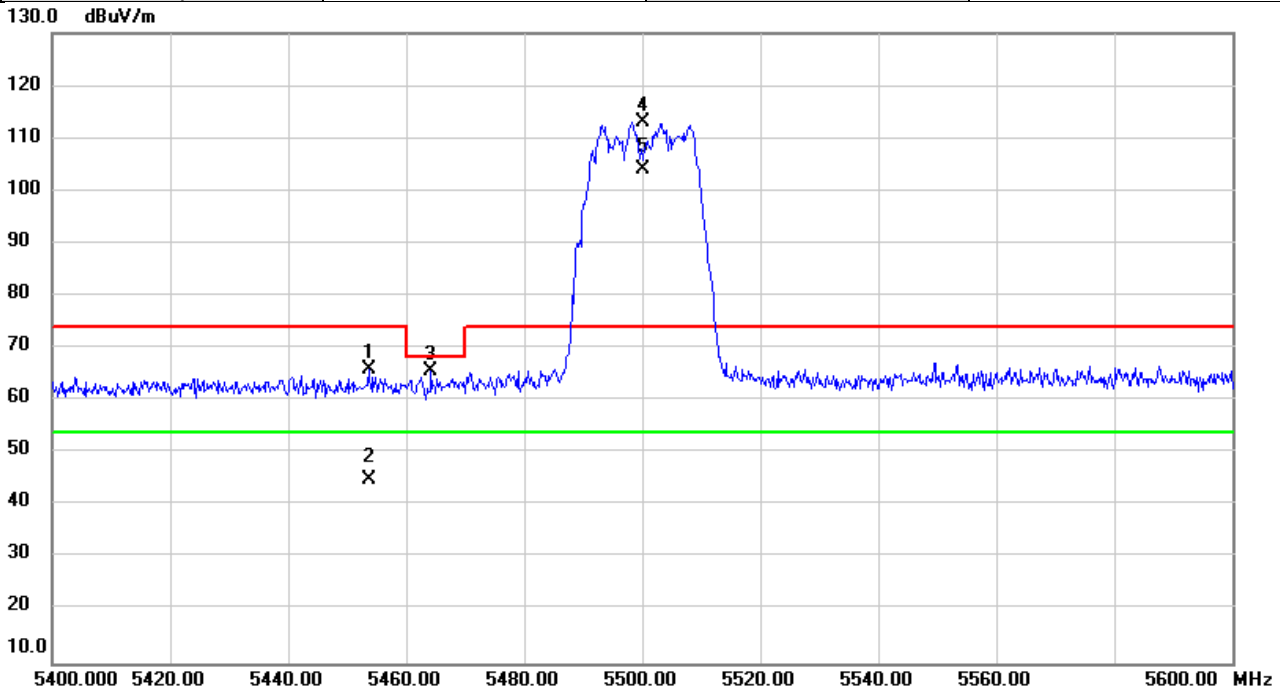


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5453.600	28.42	37.67	66.09	74.00	-7.91	peak	
2		5453.600	7.30	37.67	44.97	54.00	-9.03	AVG	
3		5464.200	28.00	37.68	65.68	68.20	-2.52	peak	
4	X	5500.000	75.42	37.71	113.13	74.00	39.13	peak	NoLimit
5	*	5500.000	66.40	37.71	104.11	54.00	50.11	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/24
Test Frequency	5700	Polarization	Vertical
Temp	20°C	Hum.	53%

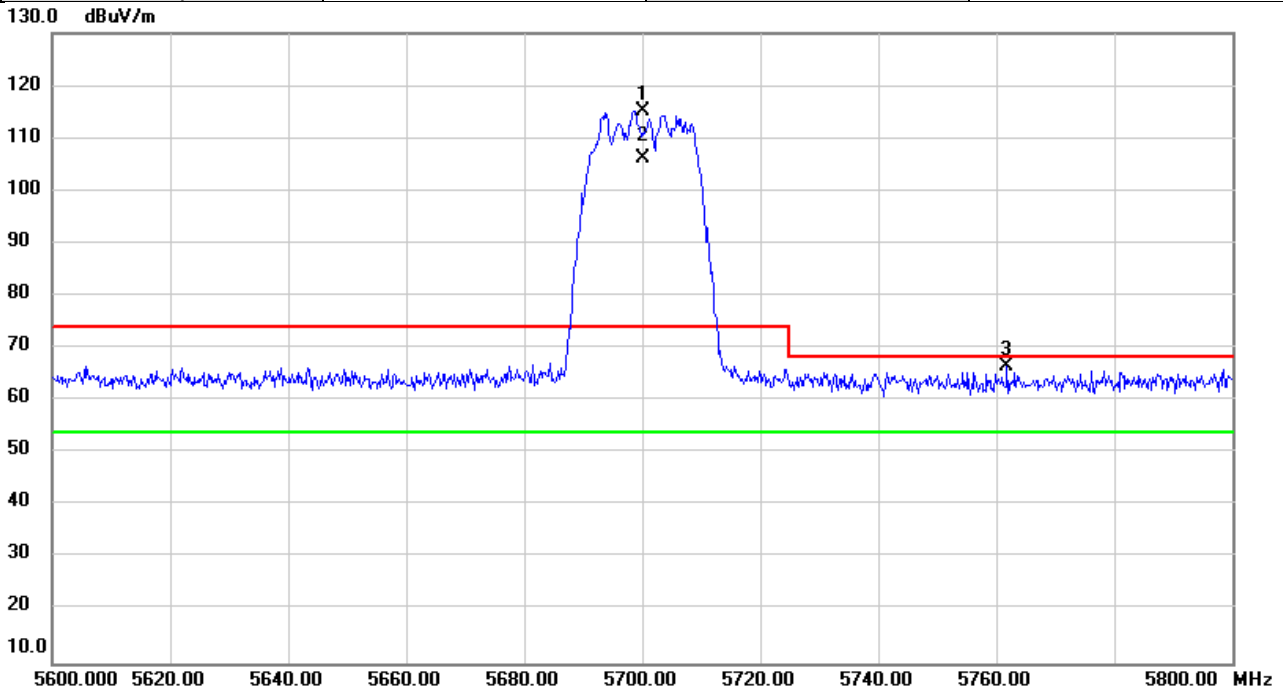


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5700.000	76.97	38.18	115.15	74.00	41.15	peak	NoLimit
2	*	5700.000	67.97	38.18	106.15	54.00	52.15	AVG	NoLimit
3		5761.800	28.17	38.33	66.50	68.20	-1.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/24
Test Frequency	5745	Polarization	Vertical
Temp	20°C	Hum.	53%

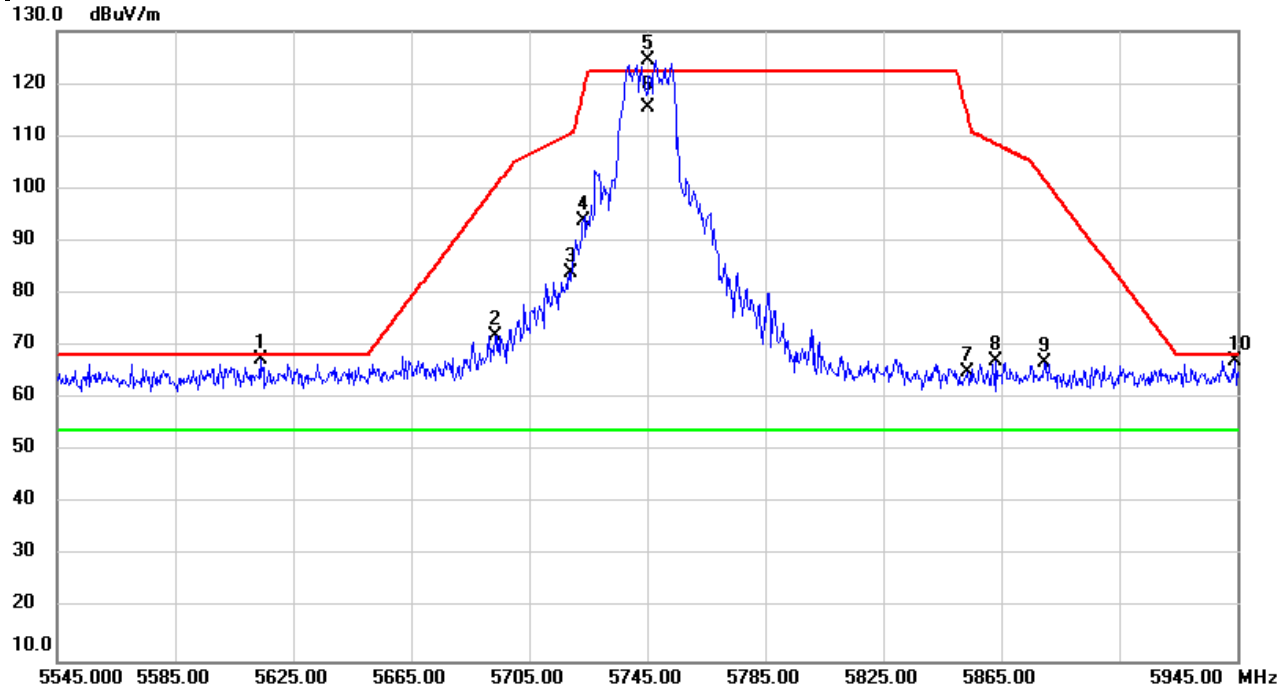

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5613.800	29.38	37.98	67.36	68.20	-0.84	peak	
2		5693.400	33.81	38.16	71.97	100.33	-28.36	peak	
3		5719.000	45.85	38.23	84.08	110.52	-26.44	peak	
4		5723.400	55.66	38.23	93.89	118.55	-24.66	peak	
5	X	5745.000	86.20	38.28	124.48	122.20	2.28	peak	NoLimit
6	*	5745.000	77.18	38.28	115.46	54.00	61.46	AVG	NoLimit
7		5853.400	26.44	38.53	64.97	114.45	-49.48	peak	
8		5863.400	28.51	38.56	67.07	108.45	-41.38	peak	
9		5879.800	28.12	38.60	66.72	101.63	-34.91	peak	
10		5944.200	28.31	38.75	67.06	68.20	-1.14	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/24
Test Frequency	5825	Polarization	Vertical
Temp	20°C	Hum.	53%

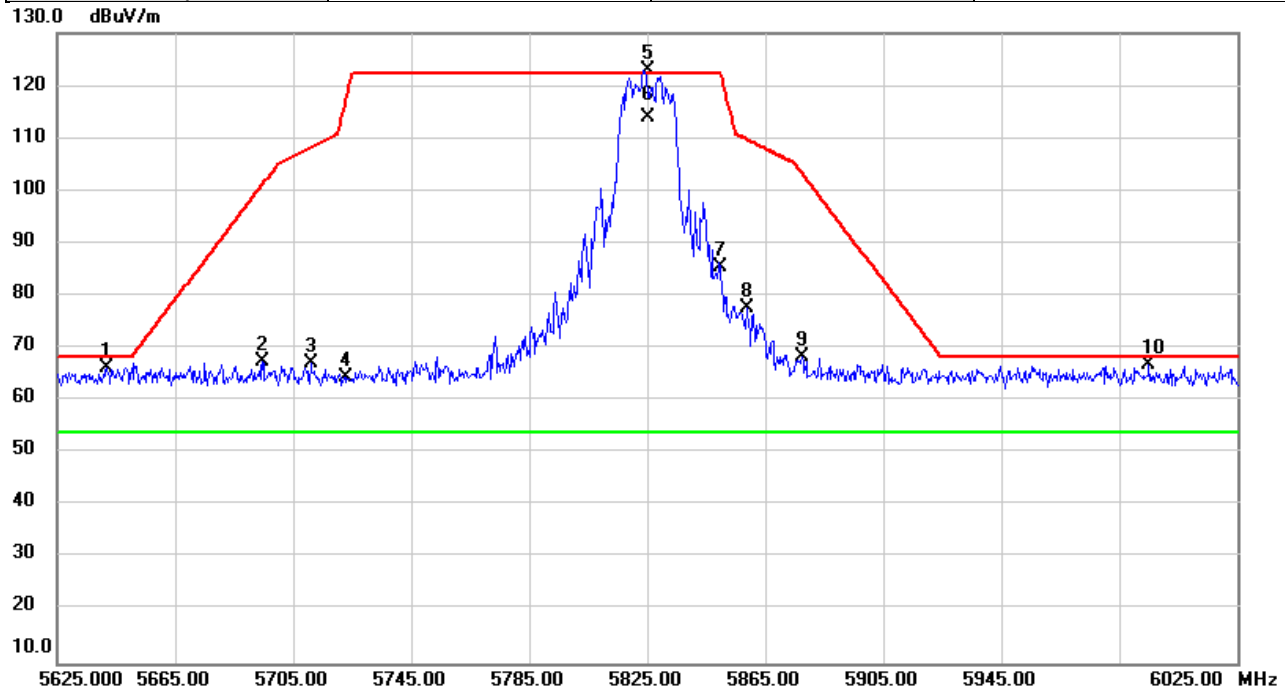


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5641.800	28.31	38.04	66.35	68.20	-1.85	peak	
2		5694.600	29.24	38.16	67.40	101.22	-33.82	peak	
3		5711.000	28.81	38.21	67.02	108.28	-41.26	peak	
4		5723.000	26.26	38.23	64.49	117.64	-53.15	peak	
5	X	5825.000	84.35	38.48	122.83	122.20	0.63	peak	NoLimit
6	*	5825.000	75.49	38.48	113.97	54.00	59.97	AVG	NoLimit
7		5849.800	47.06	38.53	85.59	122.20	-36.61	peak	
8		5858.600	39.09	38.55	77.64	109.79	-32.15	peak	
9		5877.400	29.90	38.59	68.49	103.42	-34.93	peak	
10		5995.000	27.86	38.87	66.73	68.20	-1.47	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/24
Test Frequency	5190	Polarization	Vertical
Temp	20°C	Hum.	53%

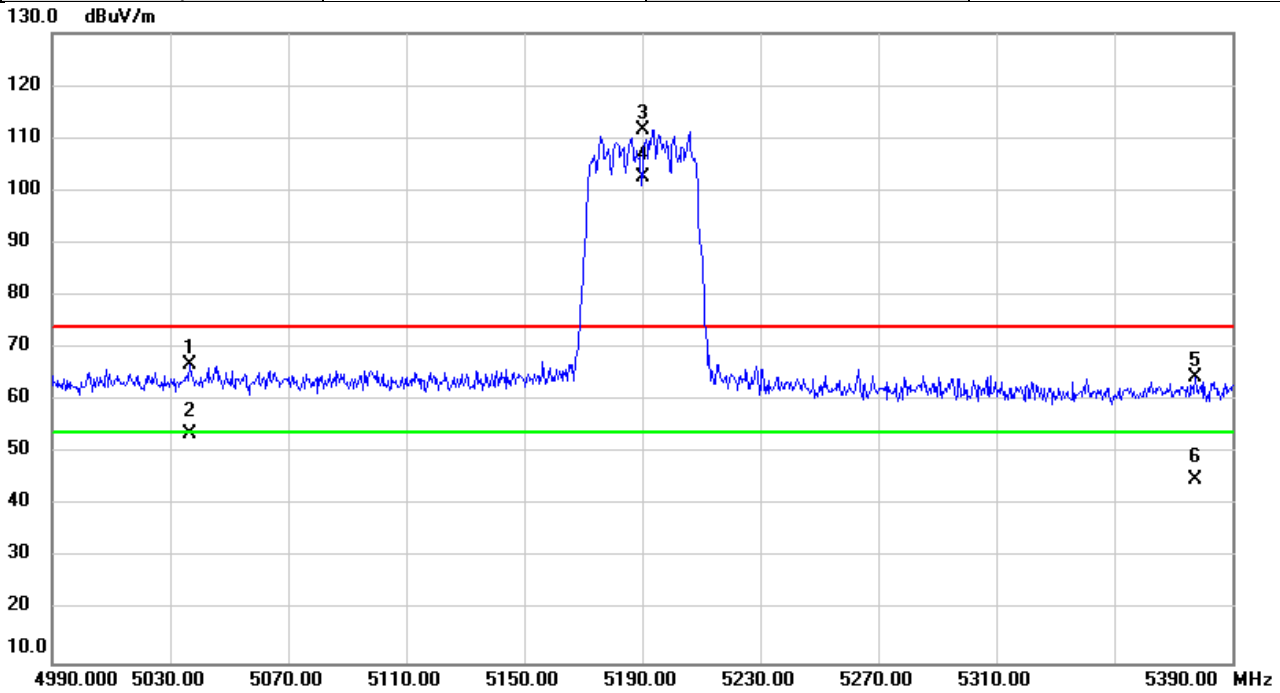


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5036.800	29.67	37.30	66.97	74.00	-7.03	peak	
2		5036.800	16.27	37.30	53.57	54.00	-0.43	AVG	
3	X	5190.000	74.12	37.43	111.55	74.00	37.55	peak	NoLimit
4	*	5190.000	65.24	37.43	102.67	54.00	48.67	AVG	NoLimit
5		5377.600	26.89	37.61	64.50	74.00	-9.50	peak	
6		5377.600	7.38	37.61	44.99	54.00	-9.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/24
Test Frequency	5230	Polarization	Vertical
Temp	20°C	Hum.	53%

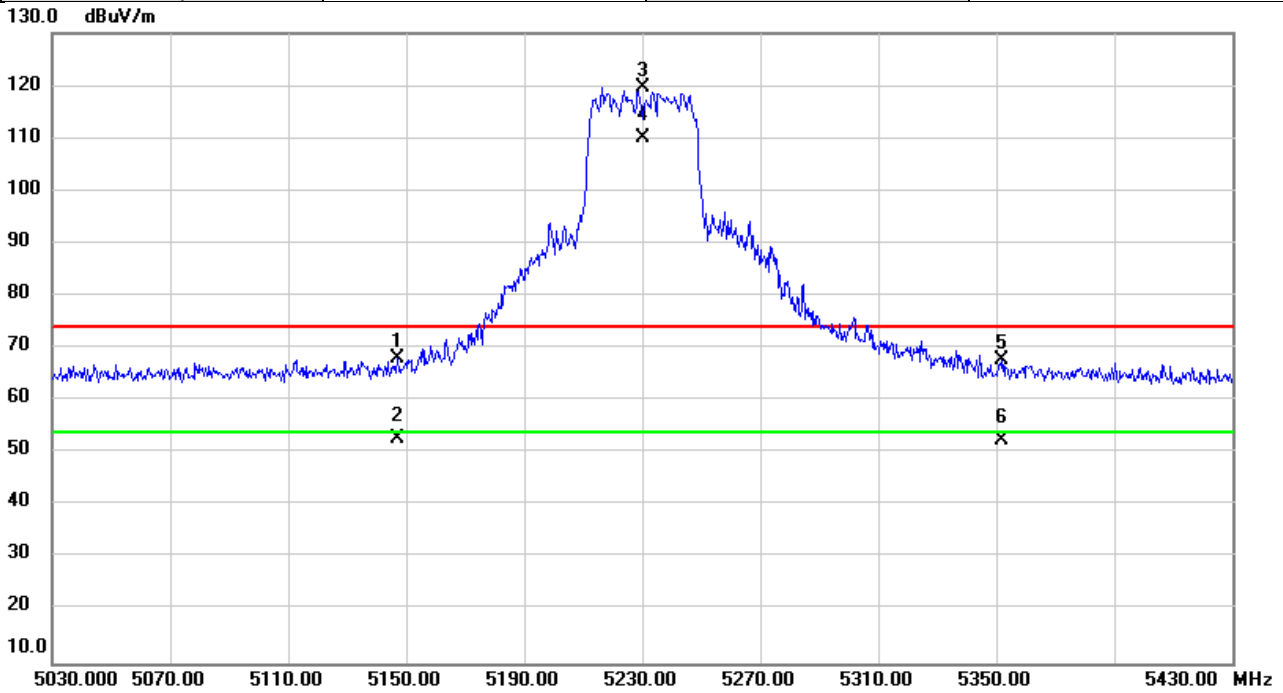


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5146.800	30.55	37.40	67.95	74.00	-6.05	peak	
2		5146.800	15.40	37.40	52.80	54.00	-1.20	AVG	
3	X	5230.000	82.19	37.47	119.66	74.00	45.66	peak	NoLimit
4	*	5230.000	72.69	37.47	110.16	54.00	56.16	AVG	NoLimit
5		5352.000	30.17	37.58	67.75	74.00	-6.25	peak	
6		5352.000	14.80	37.58	52.38	54.00	-1.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/24
Test Frequency	5270	Polarization	Vertical
Temp	20°C	Hum.	53%

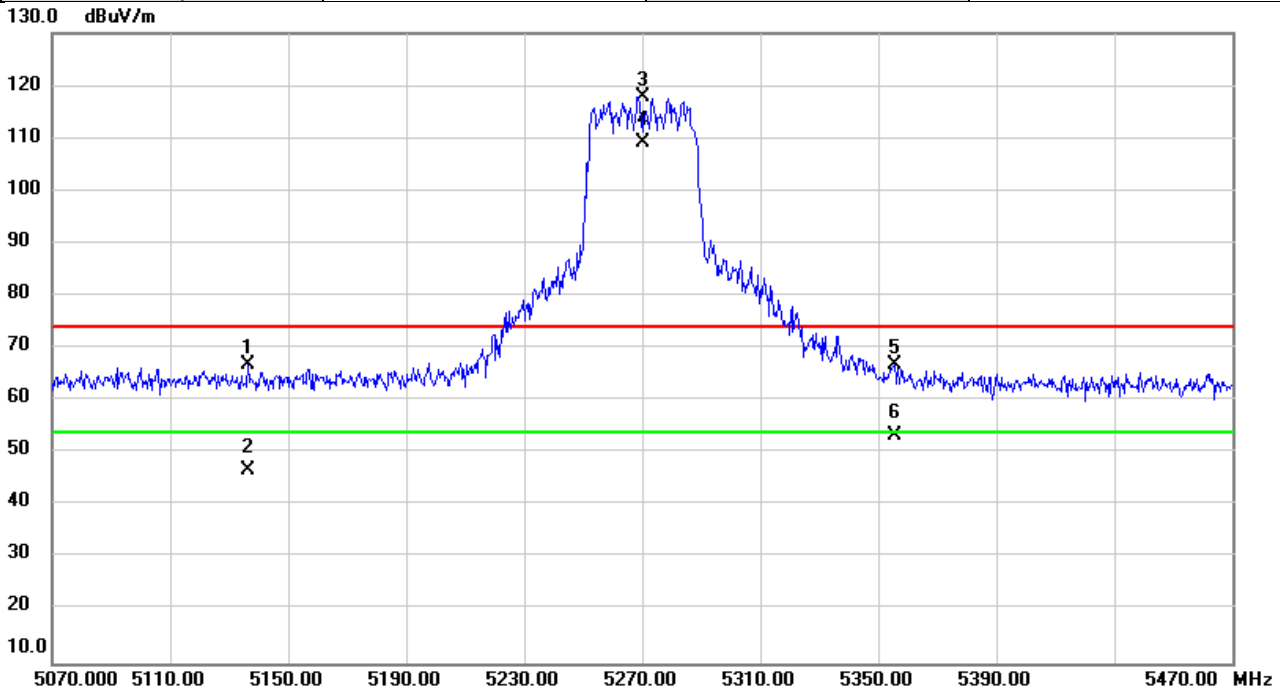


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5136.400	29.45	37.39	66.84	74.00	-7.16	peak	
2		5136.400	9.46	37.39	46.85	54.00	-7.15	AVG	
3	X	5270.000	80.34	37.51	117.85	74.00	43.85	peak	NoLimit
4	*	5270.000	71.78	37.51	109.29	54.00	55.29	AVG	NoLimit
5		5355.600	29.15	37.58	66.73	74.00	-7.27	peak	
6		5355.600	15.64	37.58	53.22	54.00	-0.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/24
Test Frequency	5310	Polarization	Vertical
Temp	20°C	Hum.	53%

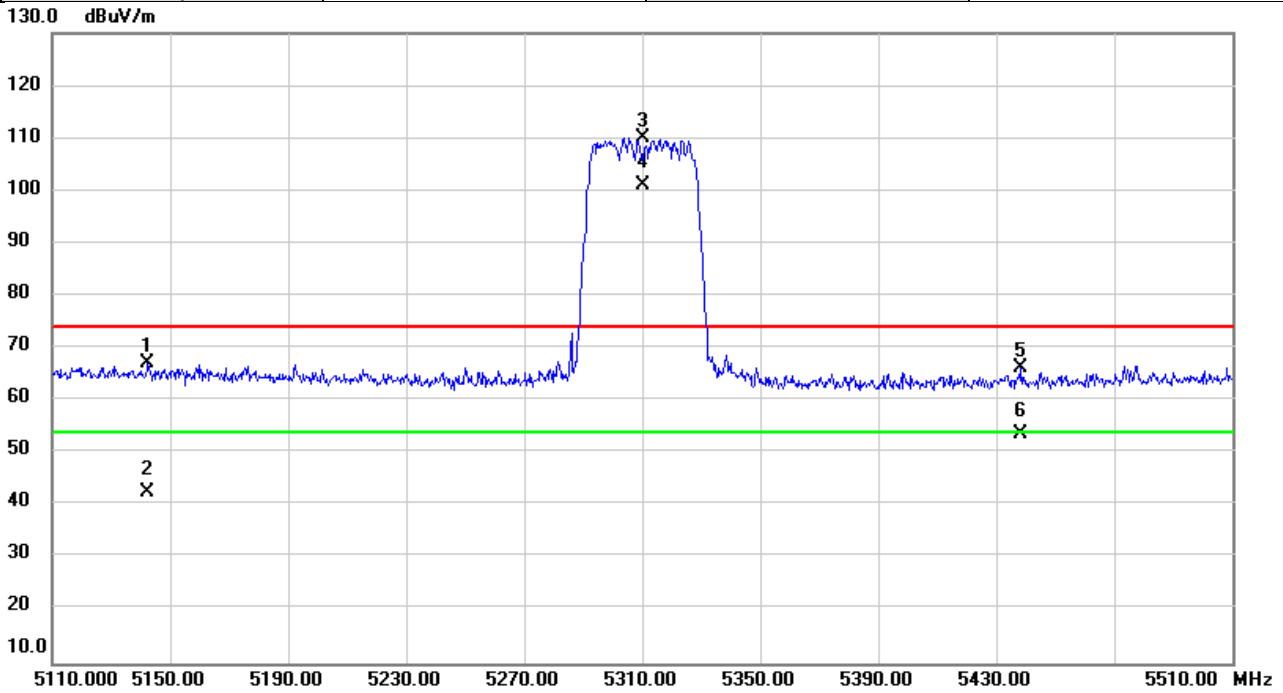


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5142.400	29.71	37.40	67.11	74.00	-6.89	peak	
2		5142.400	5.08	37.40	42.48	54.00	-11.52	AVG	
3	X	5310.000	72.57	37.55	110.12	74.00	36.12	peak	NoLimit
4	*	5310.000	63.52	37.55	101.07	54.00	47.07	AVG	NoLimit
5		5438.400	28.62	37.65	66.27	74.00	-7.73	peak	
6		5438.400	15.89	37.65	53.54	54.00	-0.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/24
Test Frequency	5510	Polarization	Vertical
Temp	20°C	Hum.	53%

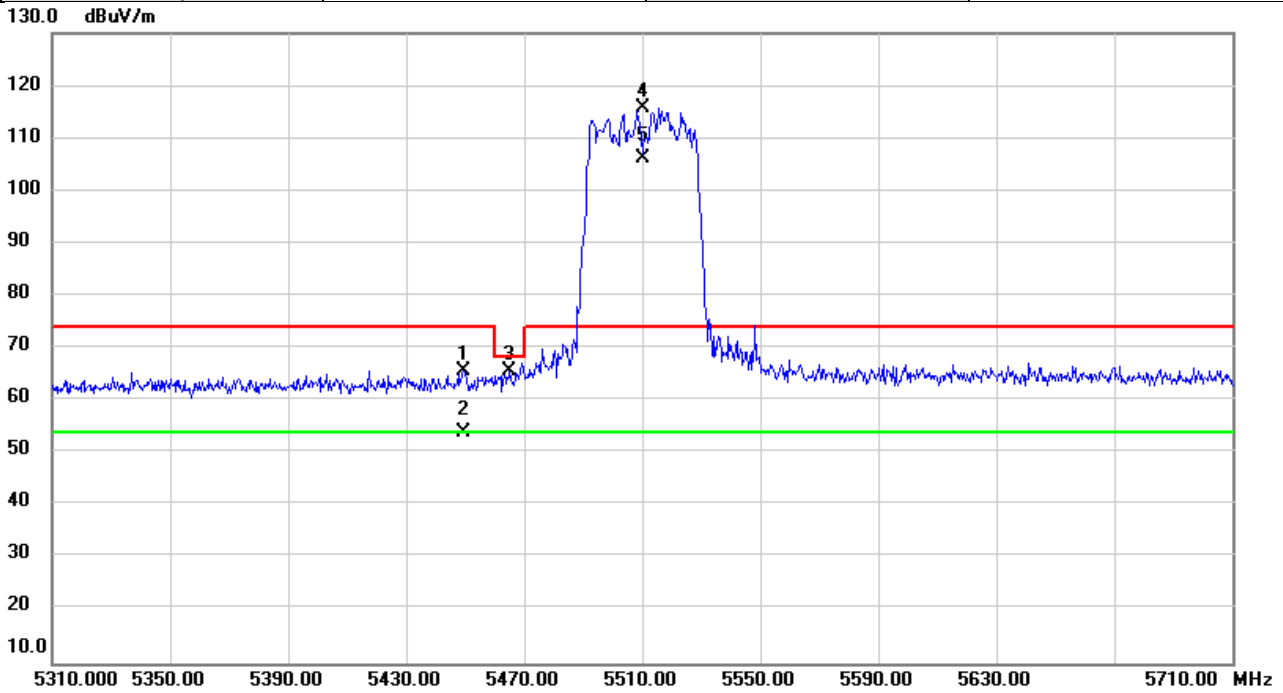


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5449.600	27.88	37.67	65.55	74.00	-8.45	peak	
2		5449.600	16.14	37.67	53.81	54.00	-0.19	AVG	
3		5465.200	28.10	37.68	65.78	68.20	-2.42	peak	
4	X	5510.000	78.06	37.73	115.79	74.00	41.79	peak	NoLimit
5	*	5510.000	68.28	37.73	106.01	54.00	52.01	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/24
Test Frequency	5670	Polarization	Vertical
Temp	20°C	Hum.	53%

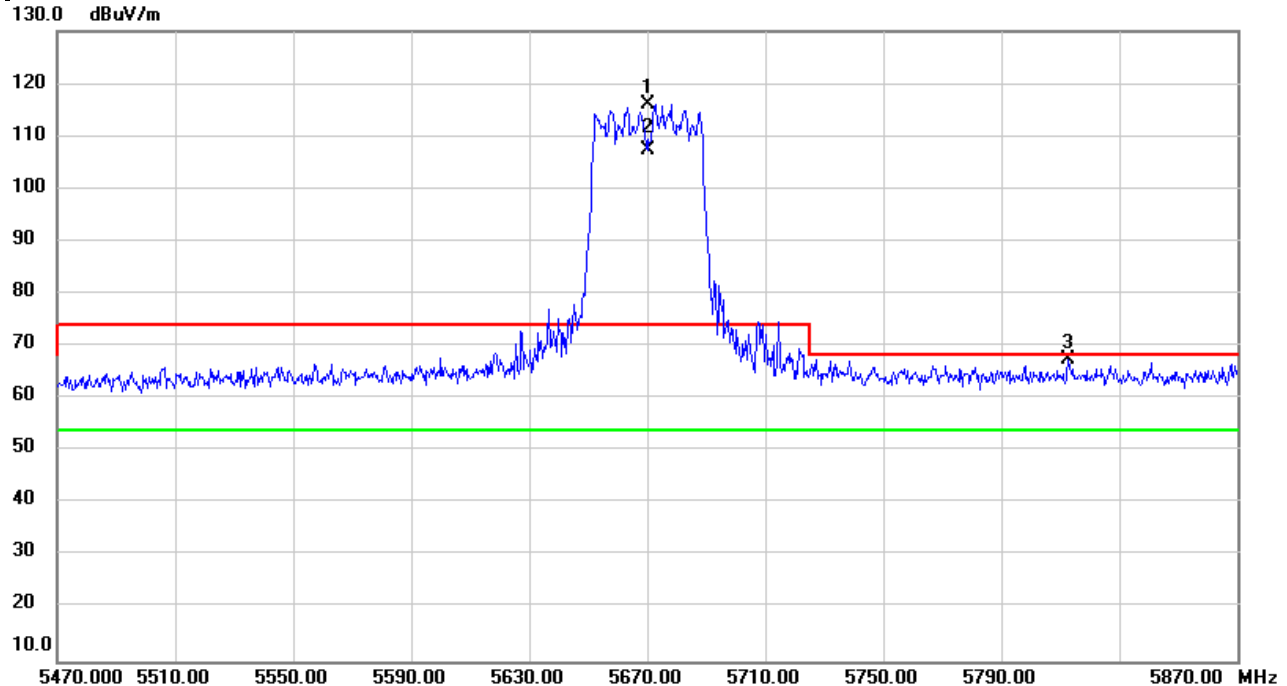

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5670.000	78.07	38.11	116.18	74.00	42.18	peak	NoLimit
2	*	5670.000	69.31	38.11	107.42	54.00	53.42	AVG	NoLimit
3		5812.800	29.09	38.44	67.53	68.20	-0.67	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/24
Test Frequency	5755	Polarization	Vertical
Temp	20°C	Hum.	53%

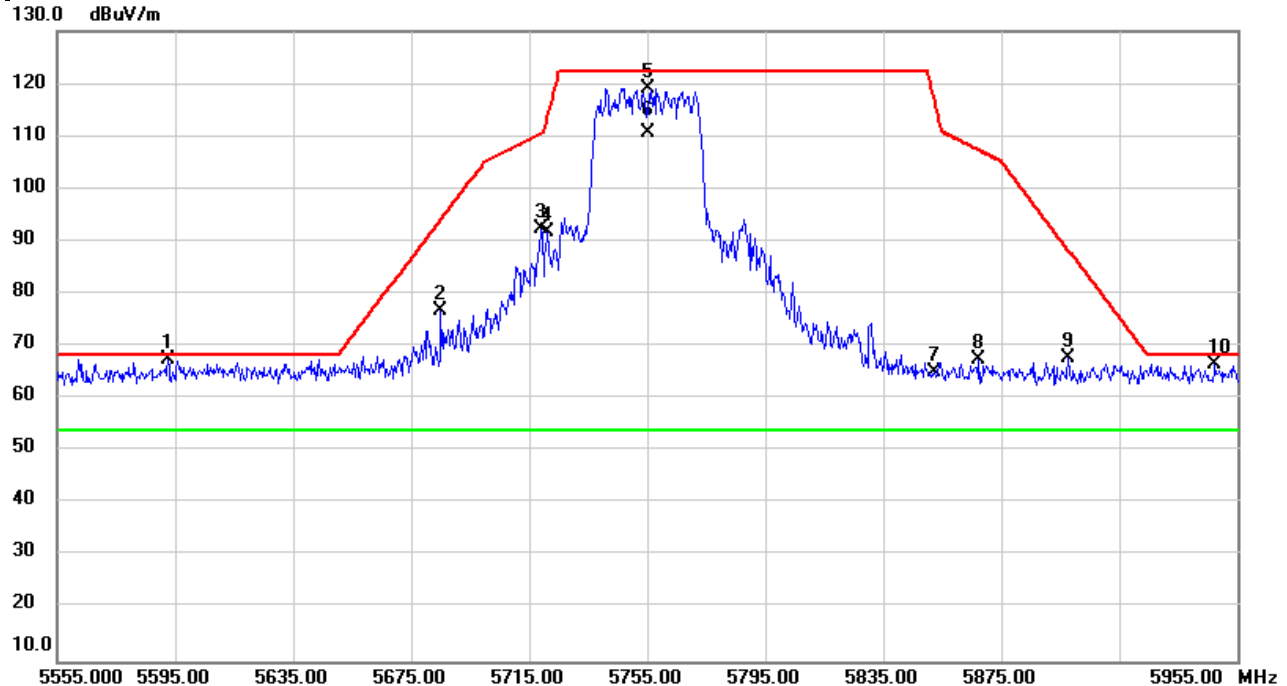


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5592.600	29.64	37.93	67.57	68.20	-0.63	peak	
2		5685.000	38.47	38.14	76.61	94.13	-17.52	peak	
3		5719.000	54.25	38.23	92.48	110.52	-18.04	peak	
4		5721.400	53.46	38.23	91.69	113.99	-22.30	peak	
5		5755.000	80.82	38.31	119.13	122.20	-3.07	peak	NoLimit
6	*	5755.000	72.26	38.31	110.57	54.00	56.57	AVG	NoLimit
7		5852.200	26.45	38.53	64.98	117.18	-52.20	peak	
8		5867.400	29.02	38.57	67.59	107.33	-39.74	peak	
9		5897.800	29.05	38.64	67.69	88.29	-20.60	peak	
10		5947.400	27.87	38.76	66.63	68.20	-1.57	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/24
Test Frequency	5795	Polarization	Vertical
Temp	20°C	Hum.	53%

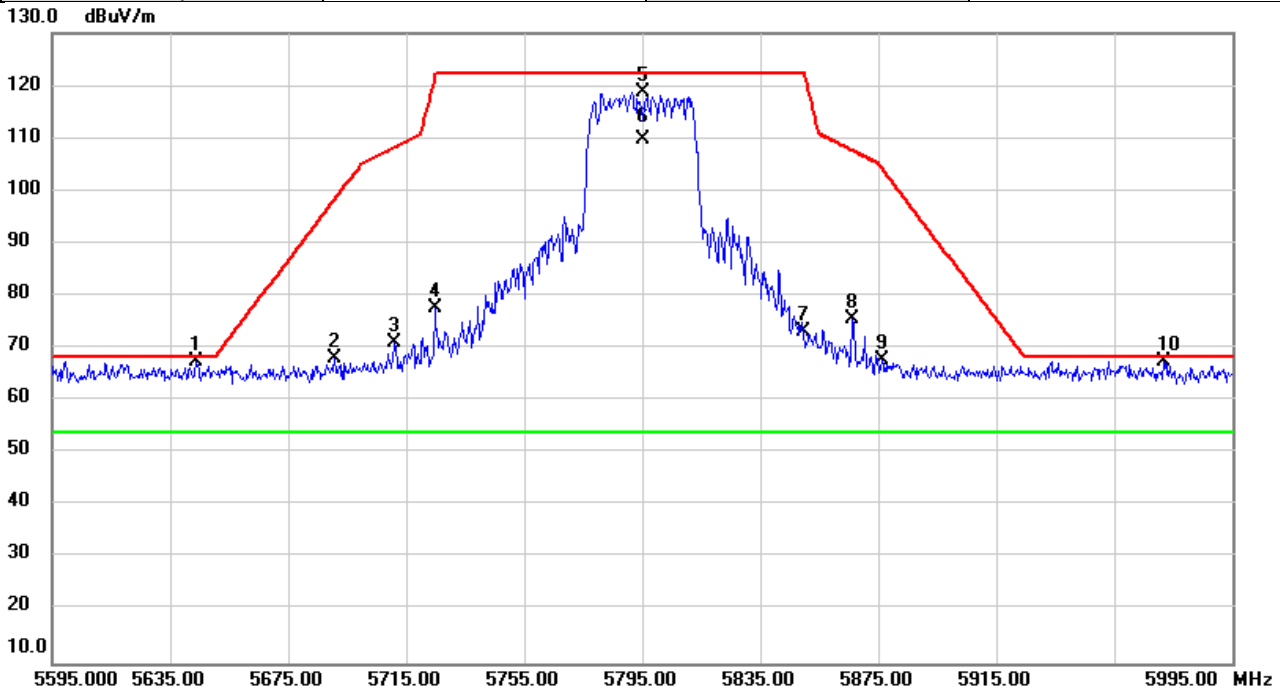


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5643.800	29.53	38.05	67.58	68.20	-0.62	peak	
2		5690.600	29.84	38.16	68.00	98.27	-30.27	peak	
3		5711.000	32.72	38.21	70.93	108.28	-37.35	peak	
4		5724.600	39.34	38.23	77.57	121.29	-43.72	peak	
5		5795.000	80.36	38.40	118.76	122.20	-3.44	peak	NoLimit
6	*	5795.000	71.35	38.40	109.75	54.00	55.75	AVG	NoLimit
7		5849.800	34.52	38.53	73.05	122.20	-49.15	peak	
8		5866.200	37.02	38.56	75.58	107.66	-32.08	peak	
9		5876.200	29.14	38.59	67.73	104.31	-36.58	peak	
10		5971.800	28.79	38.81	67.60	68.20	-0.60	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/6/23
Test Frequency	5210	Polarization	Vertical
Temp	20°C	Hum.	53%

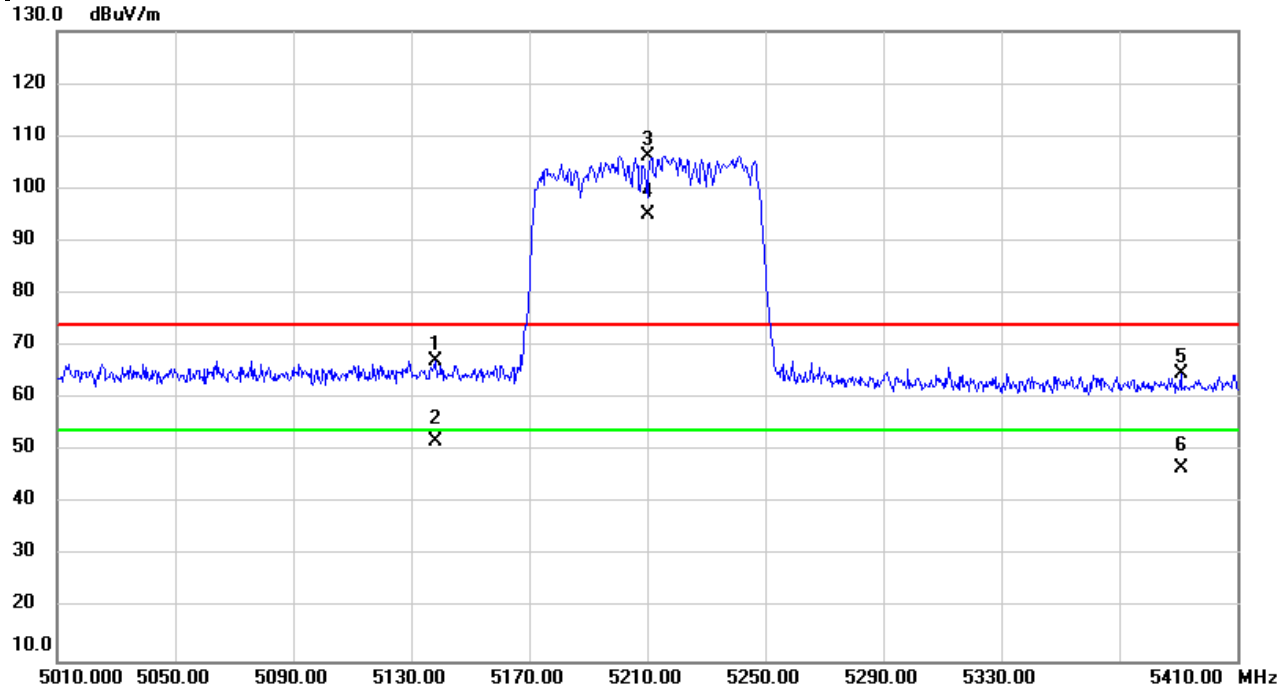

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5138.000	29.89	37.39	67.28	74.00	-6.72	peak	
2		5138.000	14.34	37.39	51.73	54.00	-2.27	AVG	
3	X	5210.000	68.74	37.46	106.20	74.00	32.20	peak	NoLimit
4	*	5210.000	57.51	37.46	94.97	54.00	40.97	AVG	NoLimit
5		5390.800	27.27	37.61	64.88	74.00	-9.12	peak	
6		5390.800	9.11	37.61	46.72	54.00	-7.28	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/6/23
Test Frequency	5290	Polarization	Vertical
Temp	20°C	Hum.	53%

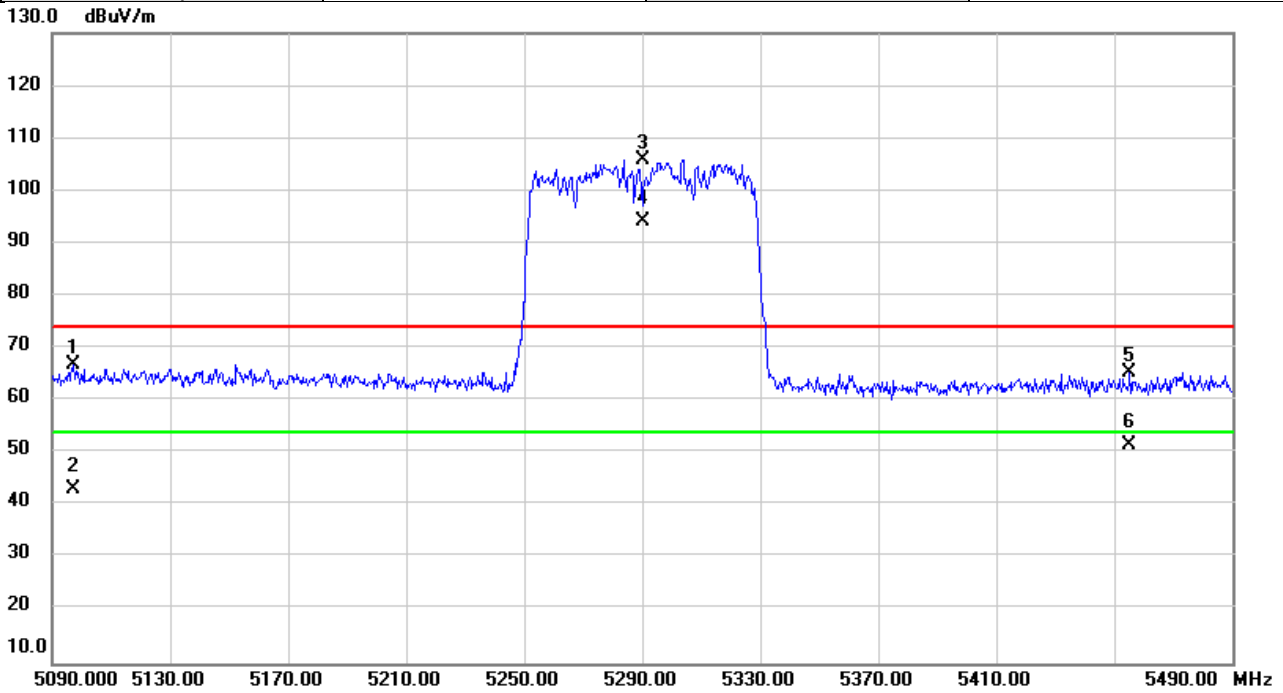


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5097.200	29.53	37.36	66.89	74.00	-7.11	peak	
2		5097.200	5.70	37.36	43.06	54.00	-10.94	AVG	
3	X	5290.000	68.36	37.52	105.88	74.00	31.88	peak	NoLimit
4	*	5290.000	56.77	37.52	94.29	54.00	40.29	AVG	NoLimit
5		5455.200	27.83	37.67	65.50	74.00	-8.50	peak	
6		5455.200	13.91	37.67	51.58	54.00	-2.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/6/23
Test Frequency	5530	Polarization	Vertical
Temp	20°C	Hum.	53%

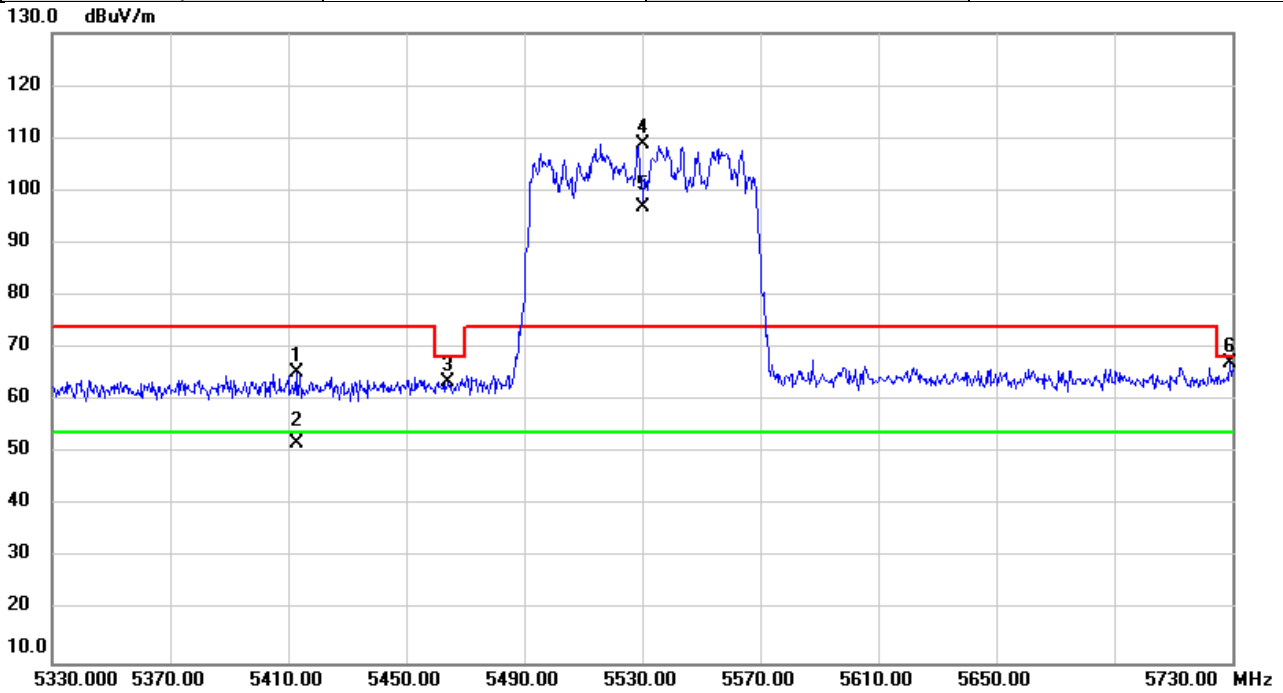


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5412.800	27.62	37.64	65.26	74.00	-8.74	peak	
2		5412.800	14.30	37.64	51.94	54.00	-2.06	AVG	
3		5464.400	25.89	37.68	63.57	68.20	-4.63	peak	
4	X	5530.000	70.99	37.78	108.77	74.00	34.77	peak	NoLimit
5	*	5530.000	58.97	37.78	96.75	54.00	42.75	AVG	NoLimit
6		5729.200	28.98	38.25	67.23	68.20	-0.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/6/23
Test Frequency	5610	Polarization	Vertical
Temp	20°C	Hum.	53%

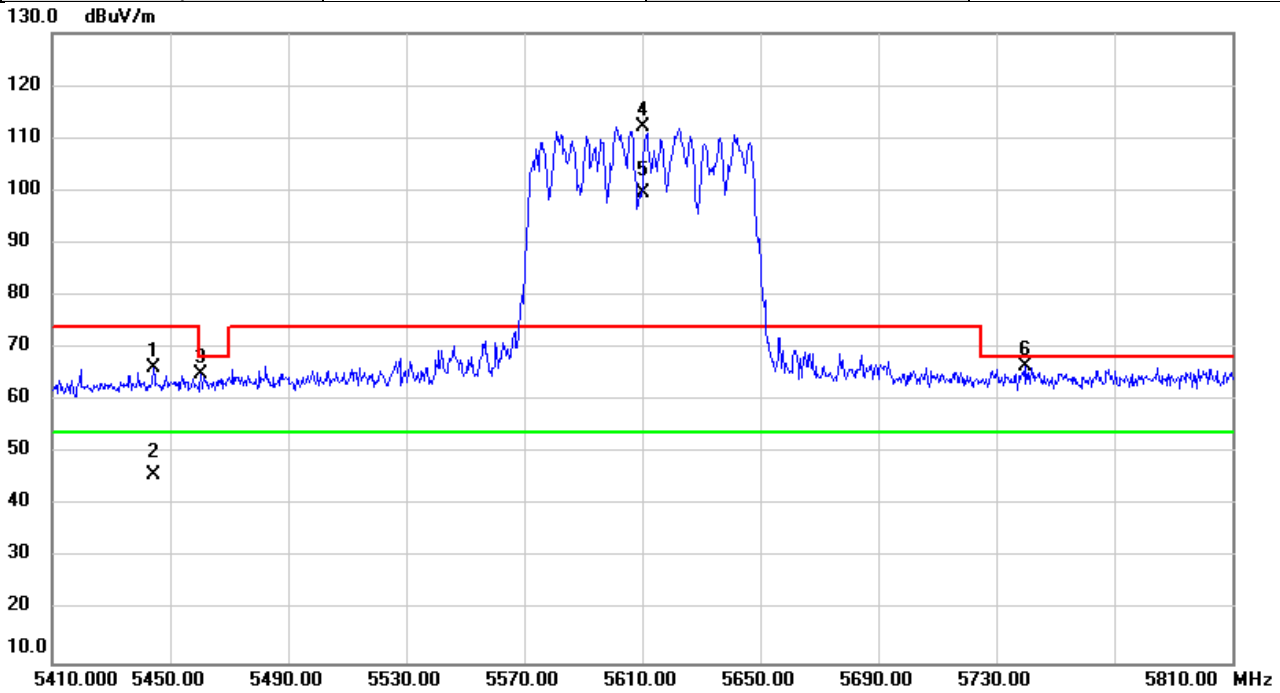


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5444.400	28.54	37.66	66.20	74.00	-7.80	peak	
2		5444.400	8.15	37.66	45.81	54.00	-8.19	AVG	
3		5460.400	27.33	37.68	65.01	68.20	-3.19	peak	
4	X	5610.000	74.07	37.96	112.03	74.00	38.03	peak	NoLimit
5	*	5610.000	61.63	37.96	99.59	54.00	45.59	AVG	NoLimit
6		5739.600	28.29	38.28	66.57	68.20	-1.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/6/23
Test Frequency	5775	Polarization	Vertical
Temp	20°C	Hum.	53%

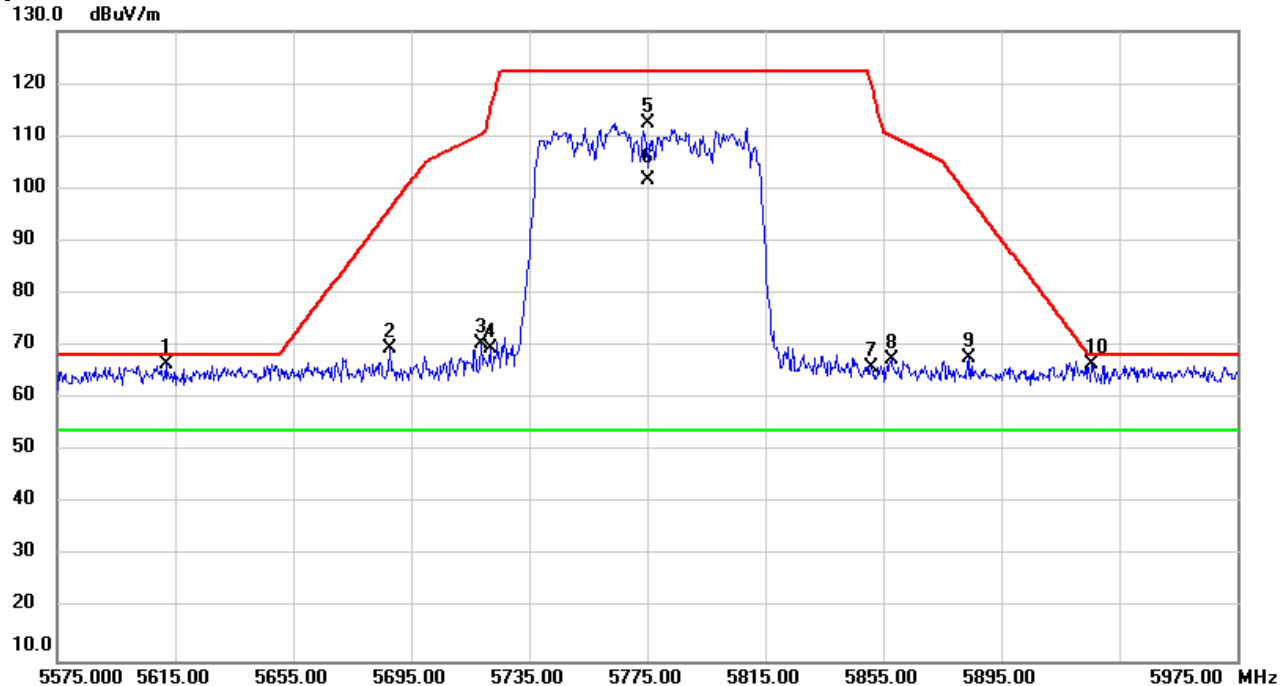


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5611.800	28.65	37.98	66.63	68.20	-1.57	peak	
2		5687.800	31.36	38.15	69.51	96.20	-26.69	peak	
3		5718.600	32.36	38.23	70.59	110.41	-39.82	peak	
4		5721.800	31.38	38.23	69.61	114.91	-45.30	peak	
5		5775.000	74.14	38.35	112.49	122.20	-9.71	peak	NoLimit
6	*	5775.000	63.28	38.35	101.63	54.00	47.63	AVG	NoLimit
7		5851.000	27.56	38.53	66.09	119.92	-53.83	peak	
8		5857.800	28.98	38.55	67.53	110.01	-42.48	peak	
9		5884.200	29.17	38.61	67.78	98.37	-30.59	peak	
10		5925.800	27.80	38.71	66.51	68.20	-1.69	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/11
Test Frequency	5180	Polarization	Vertical
Temp	23°C	Hum.	70%

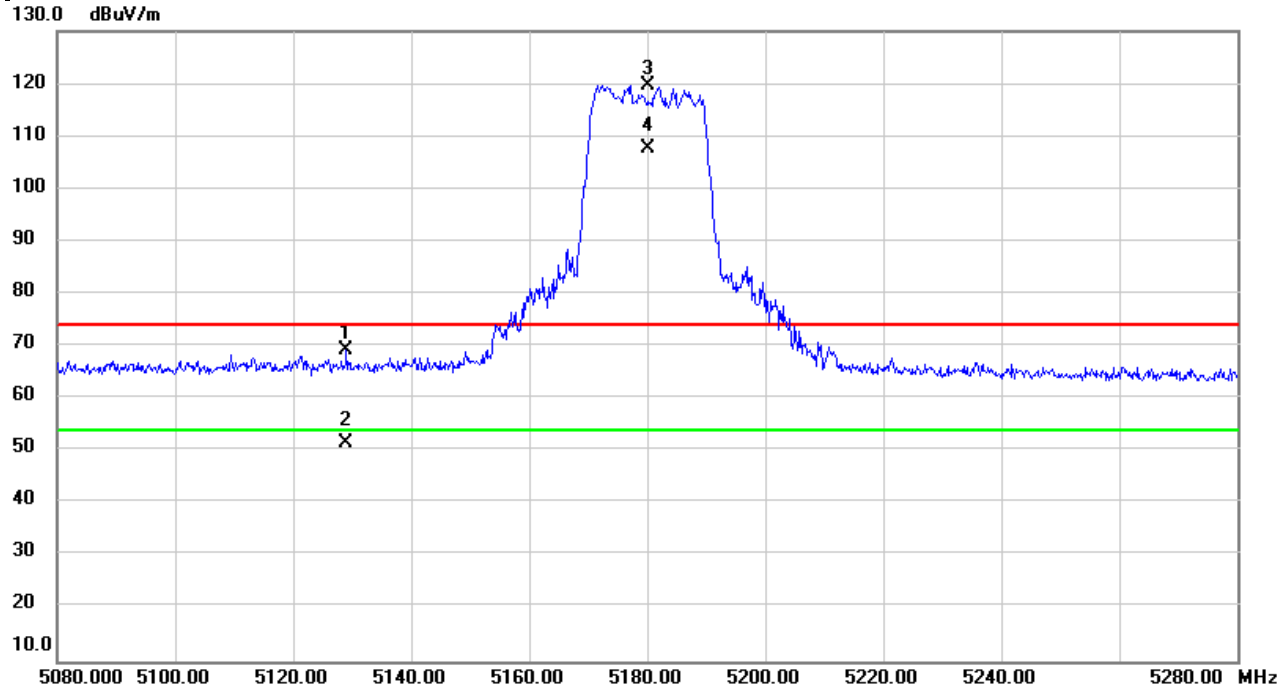

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5129.000	31.83	37.39	69.22	74.00	-4.78	peak	
2		5129.000	14.21	37.39	51.60	54.00	-2.40	AVG	
3	X	5180.000	82.23	37.43	119.66	74.00	45.66	peak	NoLimit
4	*	5180.000	70.17	37.43	107.60	54.00	53.60	AVG	NoLimit

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/11
Test Frequency	5240	Polarization	Vertical
Temp	23°C	Hum.	70%

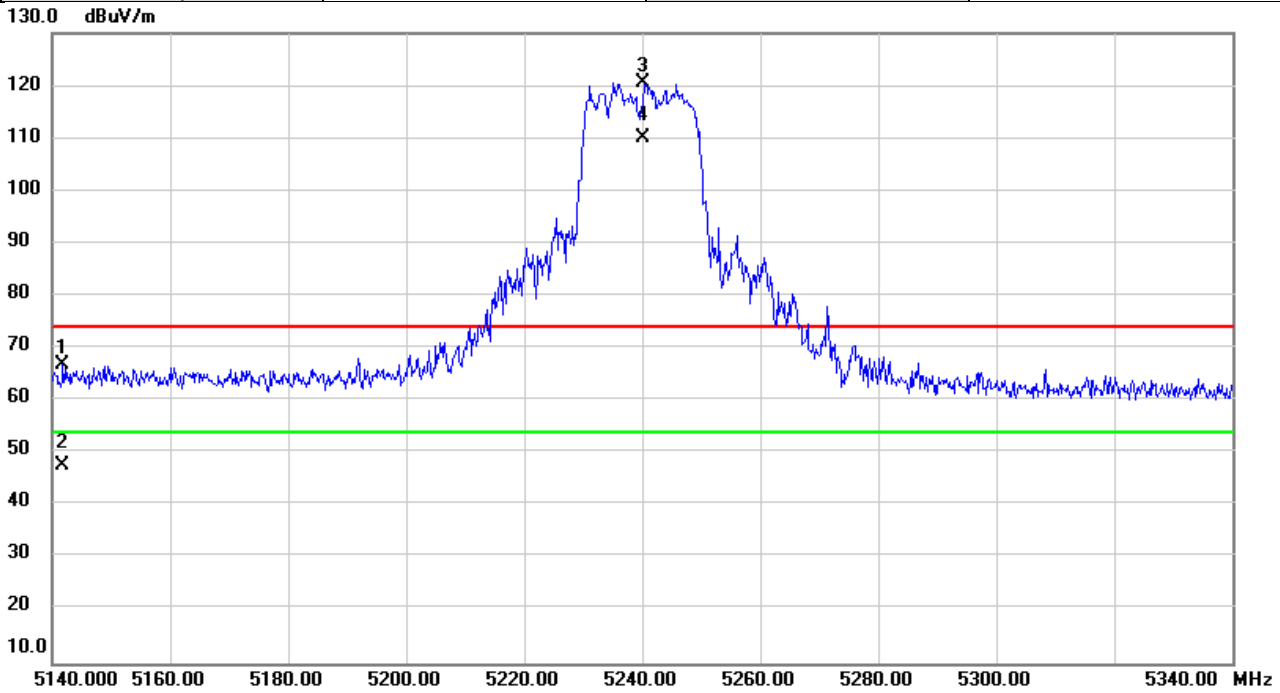


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5141.800	29.30	37.40	66.70	74.00	-7.30	peak	
2		5141.800	10.36	37.40	47.76	54.00	-6.24	AVG	
3	X	5240.000	83.08	37.48	120.56	74.00	46.56	peak	NoLimit
4	*	5240.000	72.51	37.48	109.99	54.00	55.99	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/11
Test Frequency	5320	Polarization	Vertical
Temp	23°C	Hum.	70%

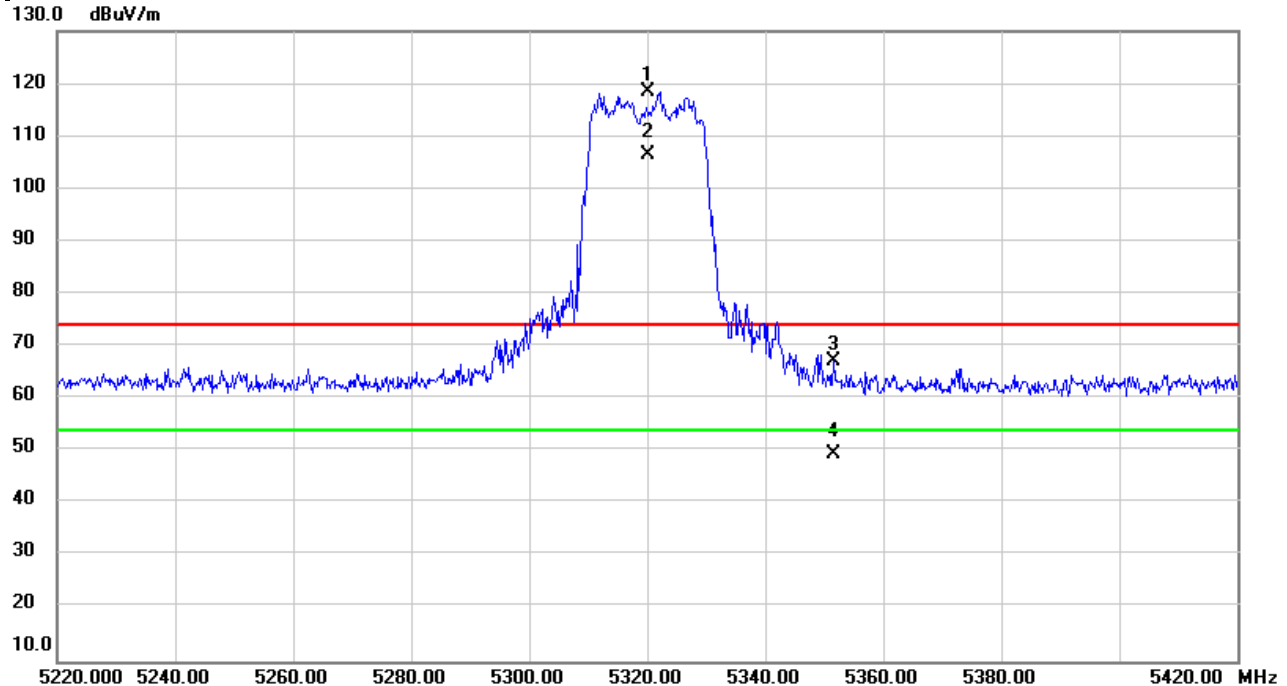

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5320.000	80.85	37.55	118.40	74.00	44.40	peak	NoLimit
2	*	5320.000	69.01	37.55	106.56	54.00	52.56	AVG	NoLimit
3		5351.600	29.71	37.58	67.29	74.00	-6.71	peak	
4		5351.600	12.02	37.58	49.60	54.00	-4.40	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/11
Test Frequency	5500	Polarization	Vertical
Temp	23°C	Hum.	70%

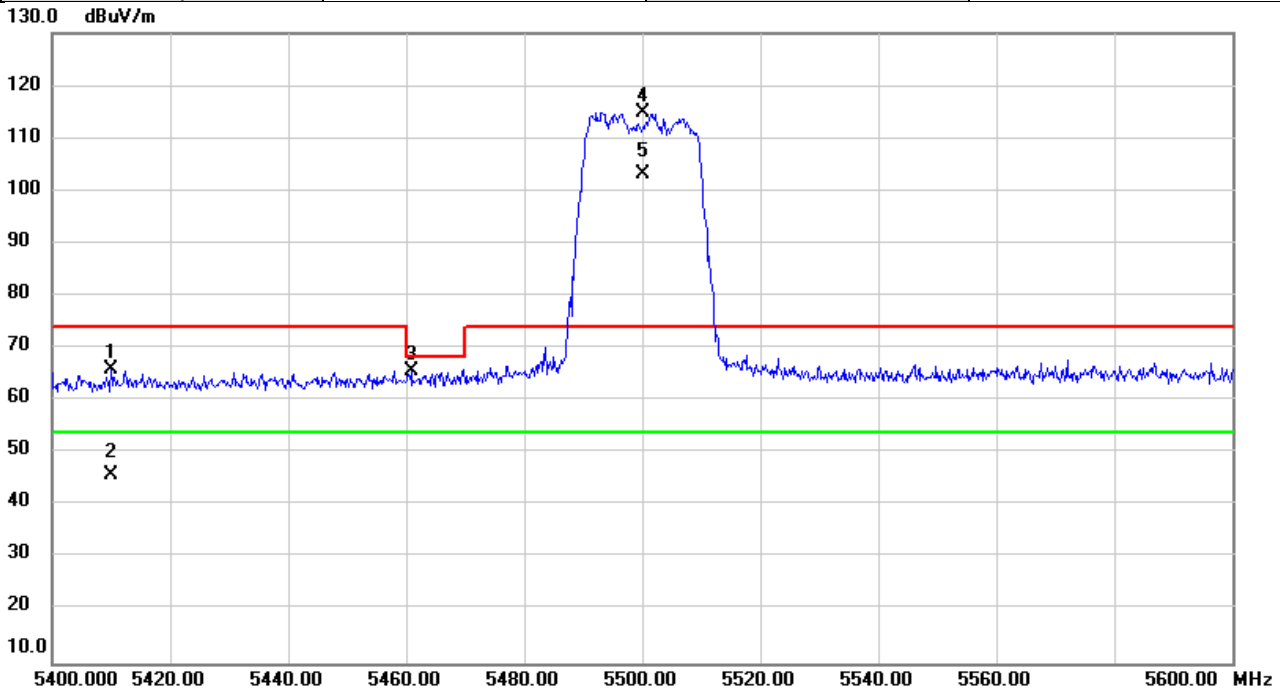


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5410.000	28.26	37.63	65.89	74.00	-8.11	peak	
2		5410.000	8.35	37.63	45.98	54.00	-8.02	AVG	
3		5460.800	27.96	37.68	65.64	68.20	-2.56	peak	
4	X	5500.000	77.15	37.71	114.86	74.00	40.86	peak	NoLimit
5	*	5500.000	65.51	37.71	103.22	54.00	49.22	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/11
Test Frequency	5700	Polarization	Vertical
Temp	23°C	Hum.	70%

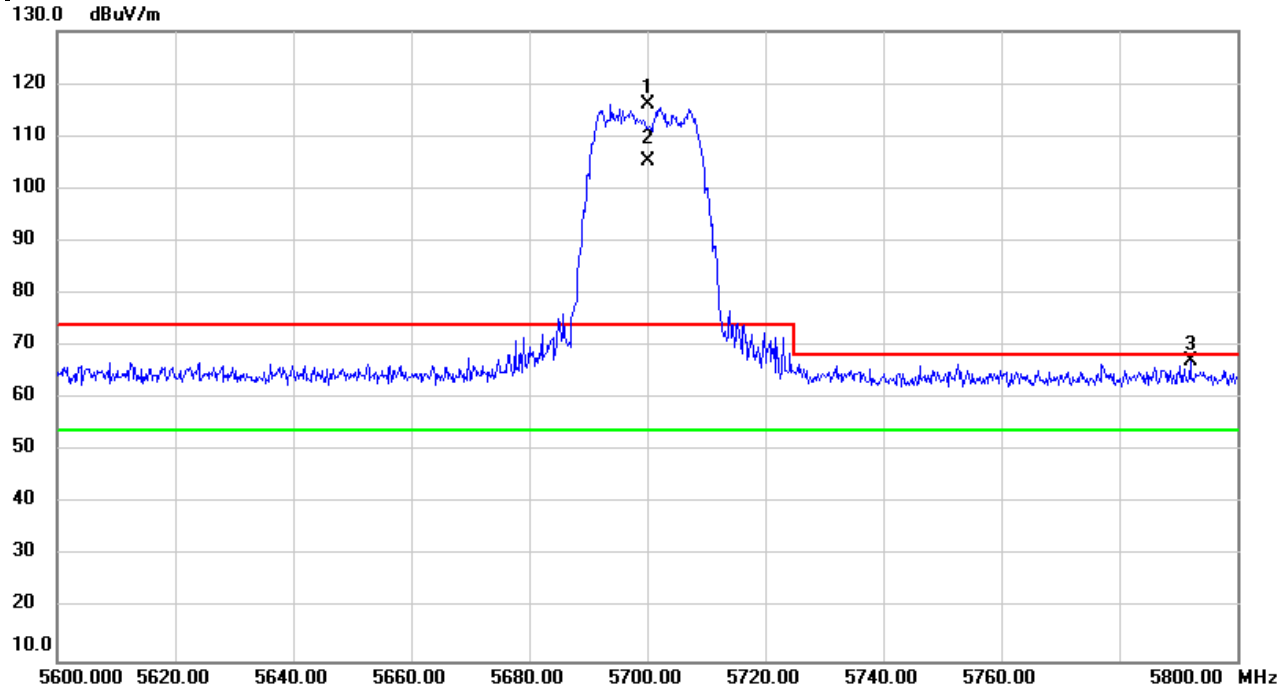

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5700.000	77.86	38.18	116.04	74.00	42.04	peak	NoLimit
2	*	5700.000	66.93	38.18	105.11	54.00	51.11	AVG	NoLimit
3		5792.000	28.90	38.39	67.29	68.20	-0.91	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/11
Test Frequency	5745	Polarization	Vertical
Temp	23°C	Hum.	70%

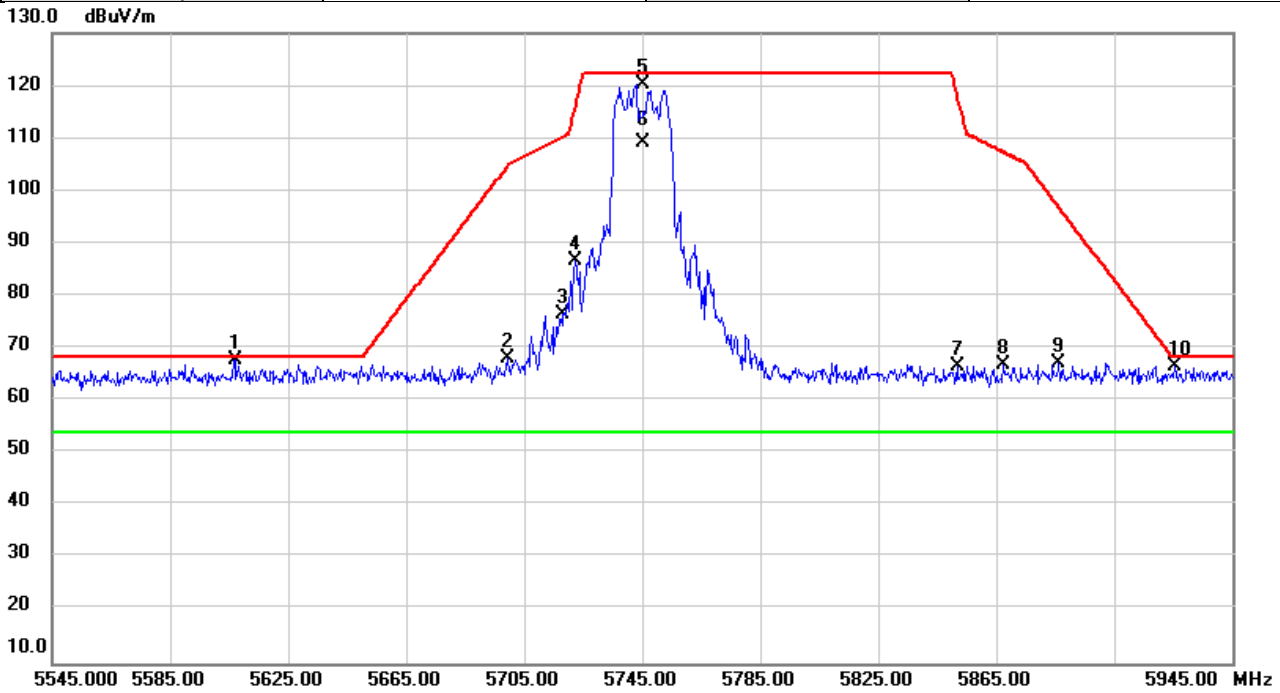


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5607.000	29.84	37.96	67.80	68.20	-0.40	peak	
2		5699.400	29.98	38.18	68.16	104.76	-36.60	peak	
3		5718.200	38.22	38.23	76.45	110.30	-33.85	peak	
4		5722.200	48.30	38.23	86.53	115.82	-29.29	peak	
5		5745.000	82.08	38.28	120.36	122.20	-1.84	peak	NoLimit
6	*	5745.000	70.74	38.28	109.02	54.00	55.02	AVG	NoLimit
7		5851.800	27.94	38.53	66.47	118.09	-51.62	peak	
8		5867.400	28.41	38.57	66.98	107.33	-40.35	peak	
9		5886.200	28.45	38.61	67.06	96.88	-29.82	peak	
10		5925.400	27.74	38.71	66.45	68.20	-1.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/11
Test Frequency	5825	Polarization	Vertical
Temp	23°C	Hum.	70%

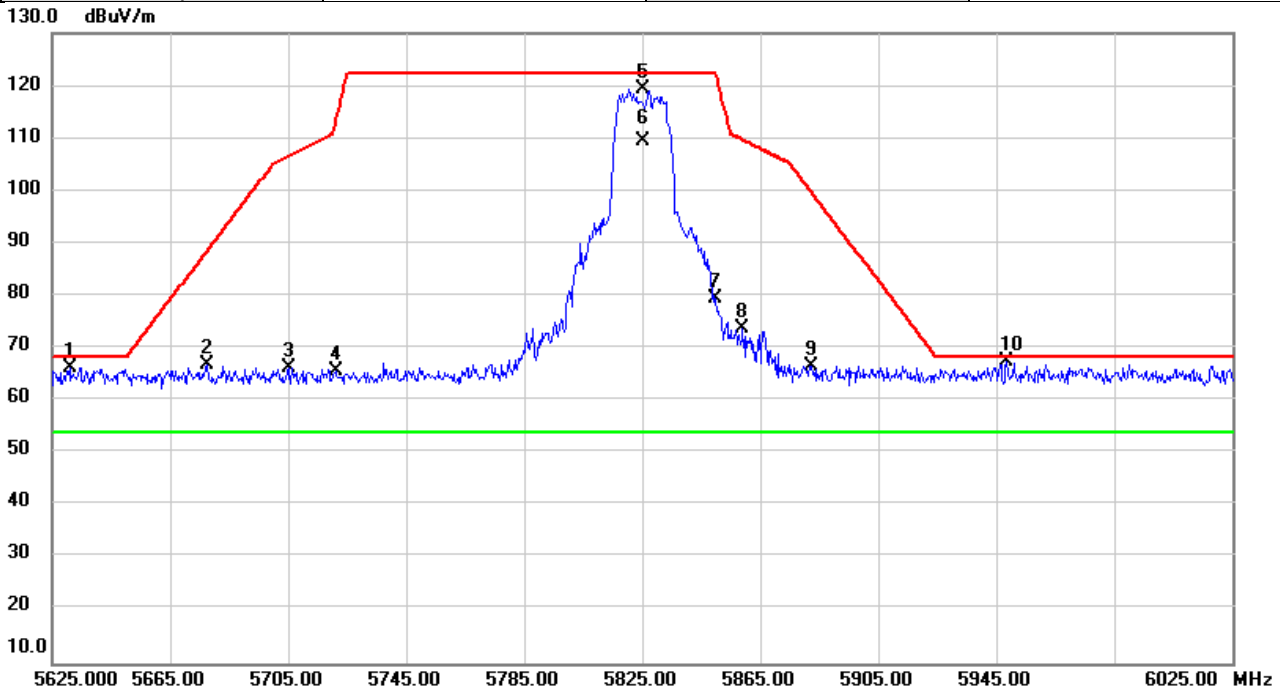


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5631.000	28.29	38.01	66.30	68.20	-1.90	peak	
2		5677.400	28.66	38.13	66.79	88.52	-21.73	peak	
3		5705.000	28.20	38.19	66.39	106.60	-40.21	peak	
4		5721.000	27.34	38.23	65.57	113.08	-47.51	peak	
5		5825.000	80.98	38.48	119.46	122.20	-2.74	peak	NoLimit
6	*	5825.000	70.85	38.48	109.33	54.00	55.33	AVG	NoLimit
7		5849.800	40.90	38.53	79.43	122.20	-42.77	peak	
8		5859.000	35.12	38.55	73.67	109.68	-36.01	peak	
9		5882.200	28.08	38.61	66.69	99.85	-33.16	peak	
10		5948.600	28.56	38.76	67.32	68.20	-0.88	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/11
Test Frequency	5190	Polarization	Vertical
Temp	23°C	Hum.	70%

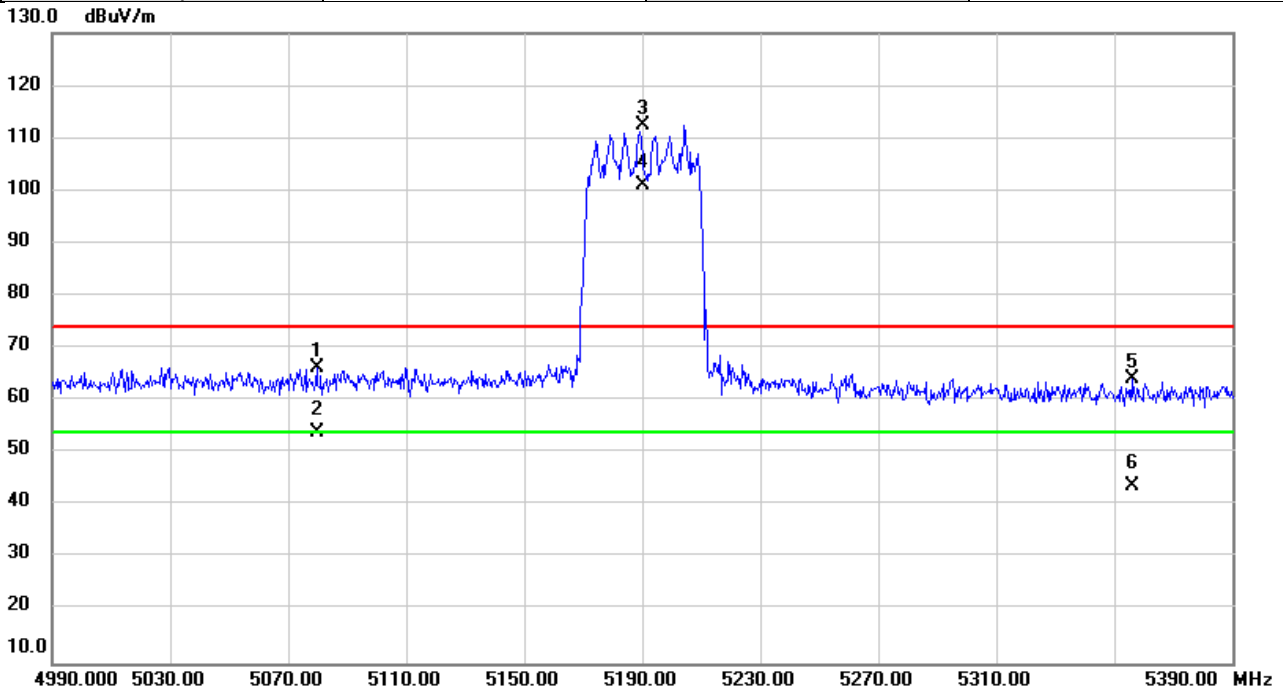


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5079.600	29.04	37.34	66.38	74.00	-7.62	peak	
2		5079.600	16.58	37.34	53.92	54.00	-0.08	AVG	
3	X	5190.000	75.00	37.43	112.43	74.00	38.43	peak	NoLimit
4	*	5190.000	63.61	37.43	101.04	54.00	47.04	AVG	NoLimit
5		5356.000	26.65	37.58	64.23	74.00	-9.77	peak	
6		5356.000	6.23	37.58	43.81	54.00	-10.19	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/11
Test Frequency	5230	Polarization	Vertical
Temp	23°C	Hum.	70%

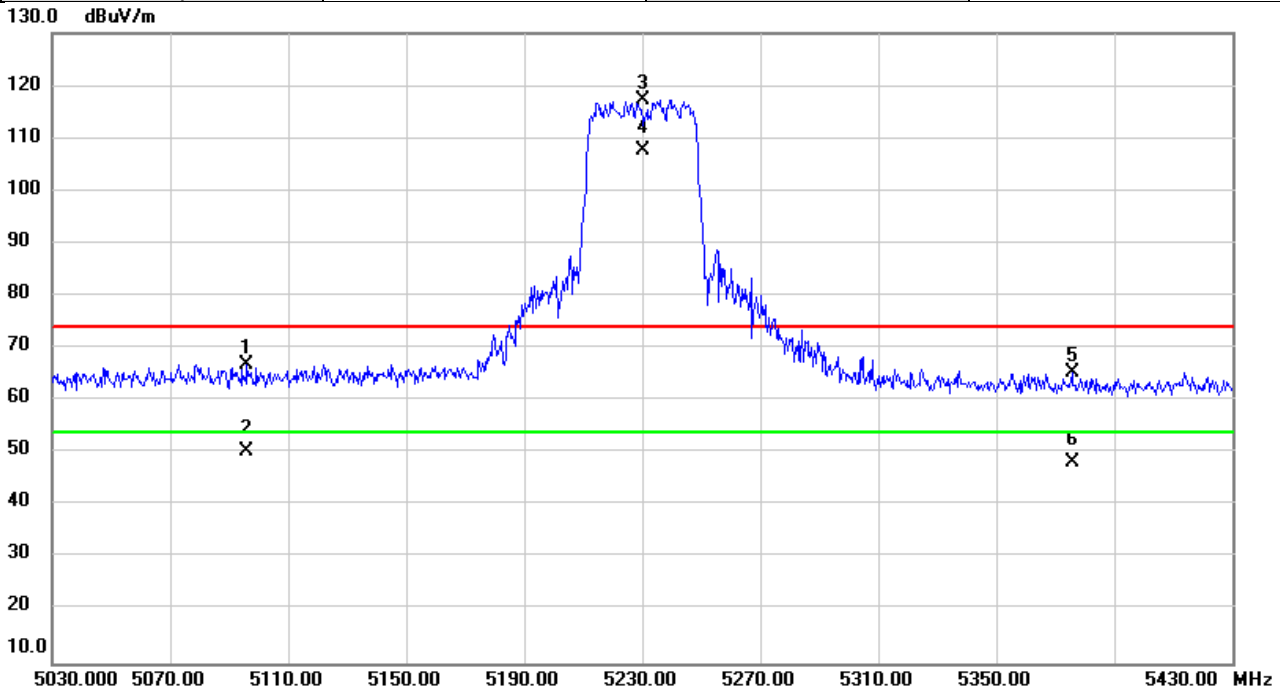


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5096.000	29.48	37.36	66.84	74.00	-7.16	peak	
2		5096.000	12.90	37.36	50.26	54.00	-3.74	AVG	
3	X	5230.000	79.80	37.47	117.27	74.00	43.27	peak	NoLimit
4	*	5230.000	70.10	37.47	107.57	54.00	53.57	AVG	NoLimit
5		5375.600	27.75	37.61	65.36	74.00	-8.64	peak	
6		5375.600	10.56	37.61	48.17	54.00	-5.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/1
Test Frequency	5270	Polarization	Vertical
Temp	22°C	Hum.	53%

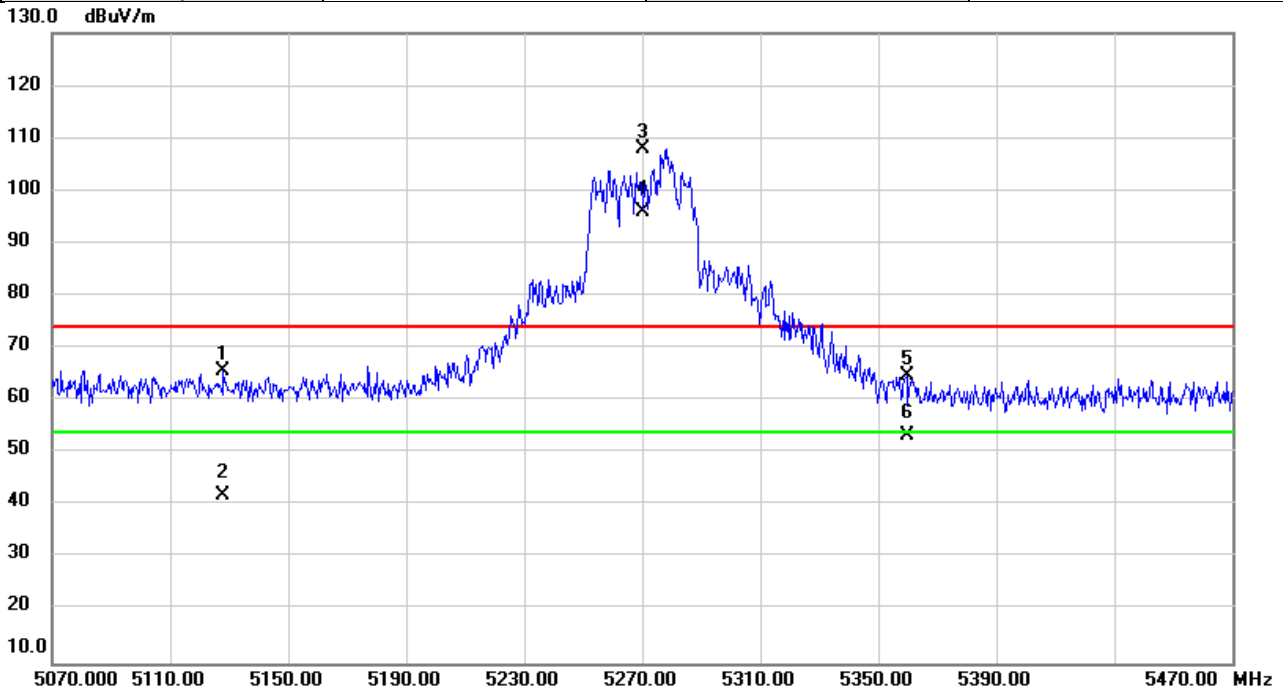


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5128.000	28.33	37.39	65.72	74.00	-8.28	peak	
2		5128.000	4.61	37.39	42.00	54.00	-12.00	AVG	
3	X	5270.000	70.47	37.51	107.98	74.00	33.98	peak	NoLimit
4	*	5270.000	58.33	37.51	95.84	54.00	41.84	AVG	NoLimit
5		5359.600	27.18	37.59	64.77	74.00	-9.23	peak	
6		5359.600	15.67	37.59	53.26	54.00	-0.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/11
Test Frequency	5310	Polarization	Vertical
Temp	23°C	Hum.	70%

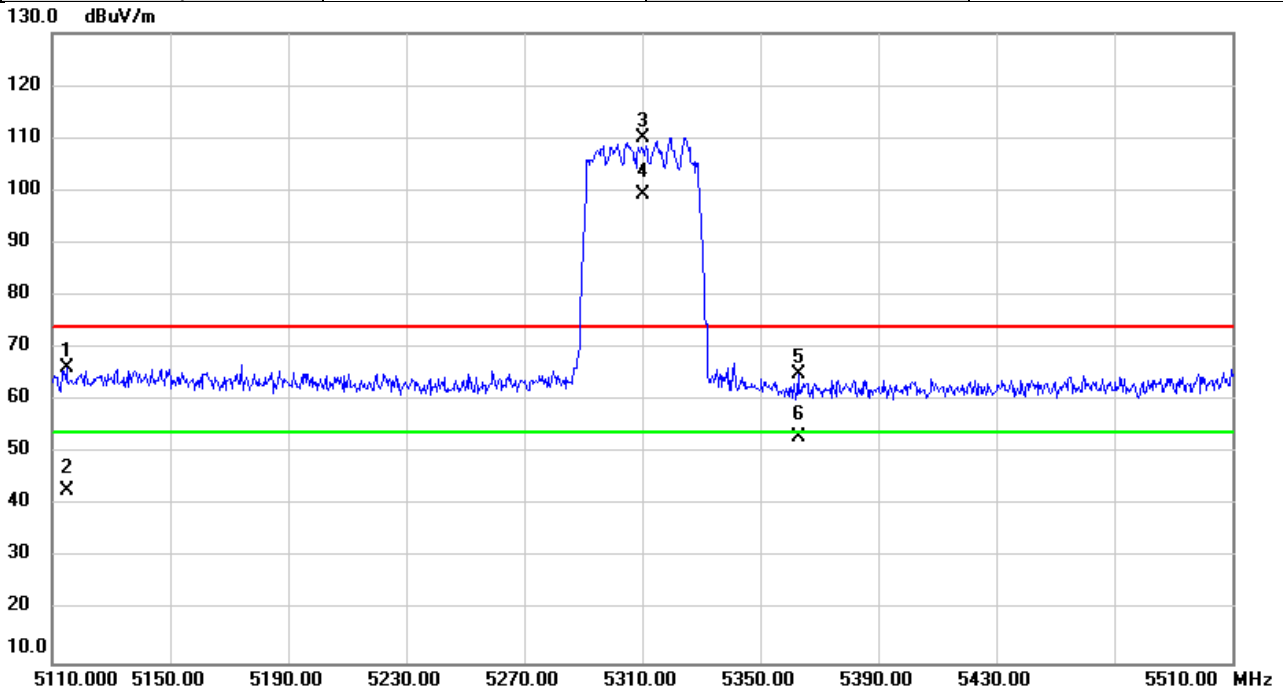


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5114.800	28.90	37.37	66.27	74.00	-7.73	peak	
2		5114.800	5.40	37.37	42.77	54.00	-11.23	AVG	
3	X	5310.000	72.64	37.55	110.19	74.00	36.19	peak	NoLimit
4	*	5310.000	61.73	37.55	99.28	54.00	45.28	AVG	NoLimit
5		5362.800	27.41	37.59	65.00	74.00	-9.00	peak	
6		5362.800	15.37	37.59	52.96	54.00	-1.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/11
Test Frequency	5510	Polarization	Vertical
Temp	23°C	Hum.	70%

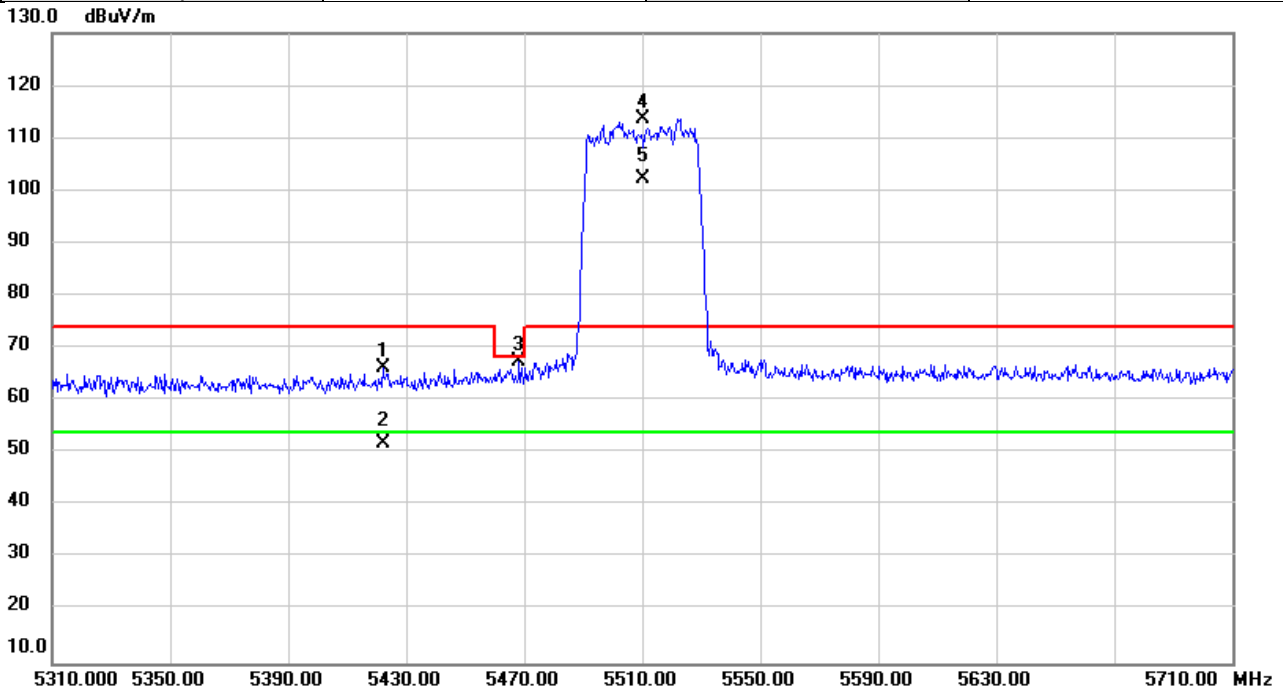


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5422.000	28.65	37.64	66.29	74.00	-7.71	peak	
2		5422.000	14.09	37.64	51.73	54.00	-2.27	AVG	
3		5468.400	29.78	37.68	67.46	68.20	-0.74	peak	
4	X	5510.000	75.95	37.73	113.68	74.00	39.68	peak	NoLimit
5	*	5510.000	64.38	37.73	102.11	54.00	48.11	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/11
Test Frequency	5670	Polarization	Vertical
Temp	23°C	Hum.	70%

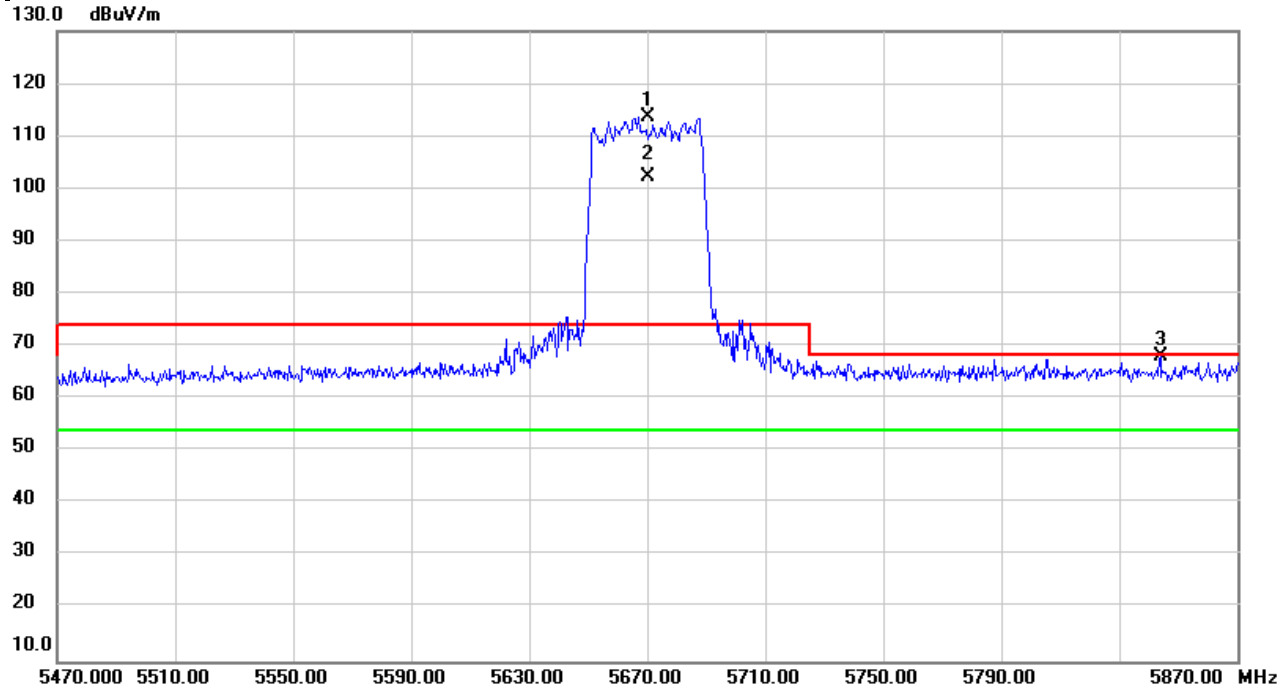

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5670.000	75.66	38.11	113.77	74.00	39.77	peak	
2	*	5670.000	64.14	38.11	102.25	54.00	48.25	AVG	
3		5844.000	29.57	38.51	68.08	68.20	-0.12	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/11
Test Frequency	5755	Polarization	Vertical
Temp	23°C	Hum.	70%

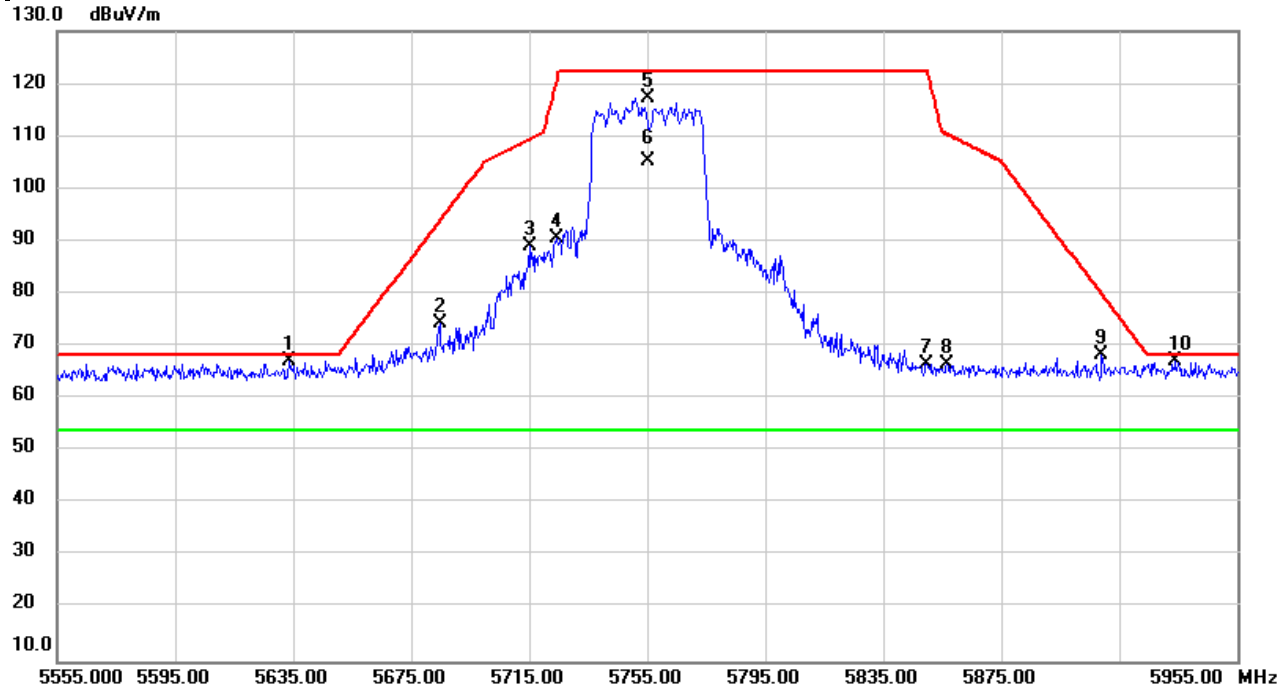


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5633.800	29.27	38.03	67.30	68.20	-0.90	peak	
2		5684.600	36.19	38.14	74.33	93.84	-19.51	peak	
3		5715.000	50.97	38.21	89.18	109.40	-20.22	peak	
4		5724.200	52.43	38.23	90.66	120.38	-29.72	peak	
5		5755.000	78.91	38.31	117.22	122.20	-4.98	peak	NoLimit
6	*	5755.000	66.81	38.31	105.12	54.00	51.12	AVG	NoLimit
7		5849.800	28.09	38.53	66.62	122.20	-55.58	peak	
8		5856.600	27.89	38.55	66.44	110.35	-43.91	peak	
9		5909.000	29.66	38.66	68.32	80.01	-11.69	peak	
10		5934.200	28.30	38.73	67.03	68.20	-1.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/11
Test Frequency	5795	Polarization	Vertical
Temp	23°C	Hum.	70%

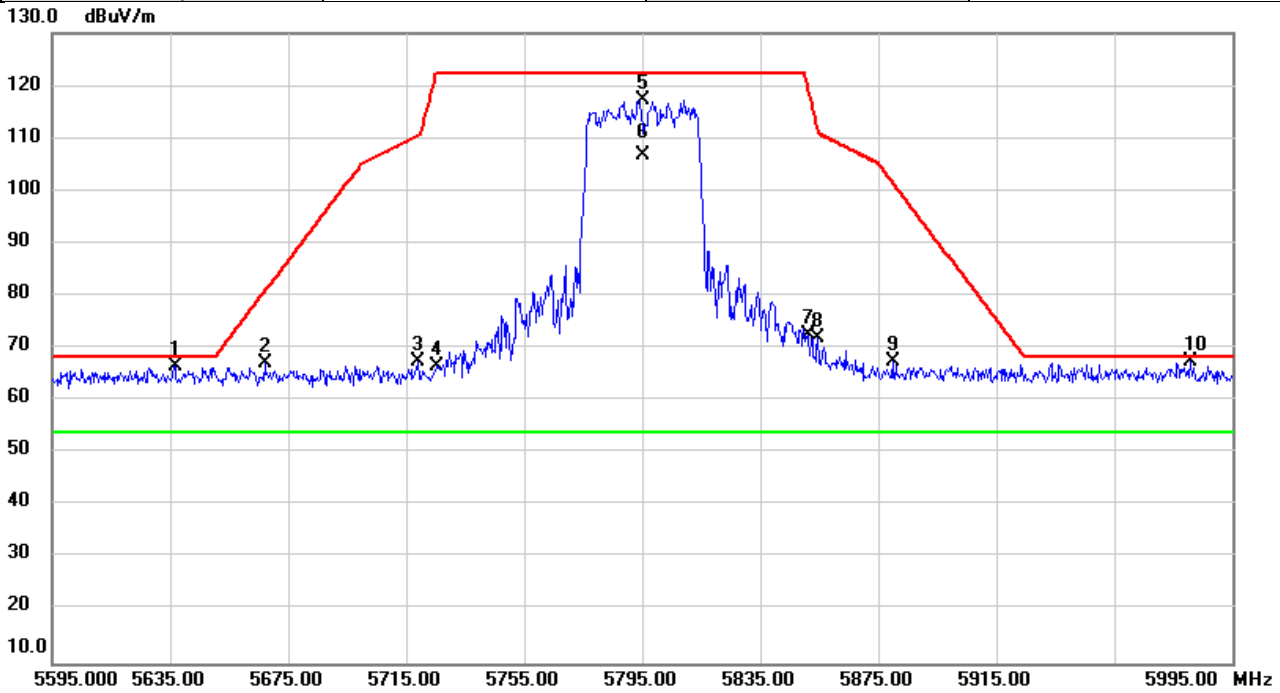


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5636.600	28.62	38.03	66.65	68.20	-1.55	peak	
2		5667.000	29.13	38.10	67.23	80.82	-13.59	peak	
3		5719.000	29.22	38.23	67.45	110.52	-43.07	peak	
4		5725.400	28.29	38.24	66.53	122.20	-55.67	peak	
5		5795.000	78.91	38.40	117.31	122.20	-4.89	peak	NoLimit
6	*	5795.000	68.36	38.40	106.76	54.00	52.76	AVG	NoLimit
7		5851.000	33.99	38.53	72.52	119.92	-47.40	peak	
8		5854.600	33.41	38.54	71.95	111.71	-39.76	peak	
9		5879.800	28.94	38.60	67.54	101.63	-34.09	peak	
10		5980.600	28.50	38.83	67.33	68.20	-0.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/6/11
Test Frequency	5210	Polarization	Vertical
Temp	22°C	Hum.	52%

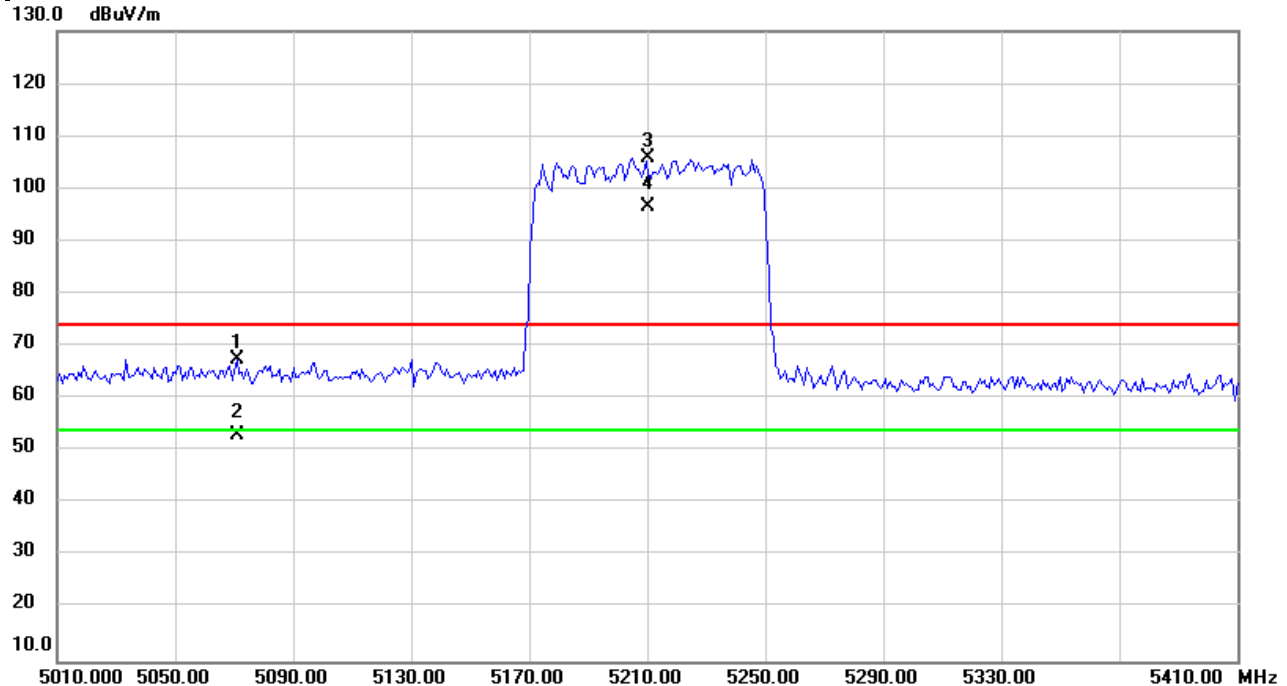

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5070.800	30.27	37.33	67.60	74.00	-6.40	peak	
2		5070.800	15.59	37.33	52.92	54.00	-1.08	AVG	
3	X	5210.000	68.52	37.46	105.98	74.00	31.98	peak	NoLimit
4	*	5210.000	59.03	37.46	96.49	54.00	42.49	AVG	NoLimit

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/6/11
Test Frequency	5290	Polarization	Vertical
Temp	23°C	Hum.	70%

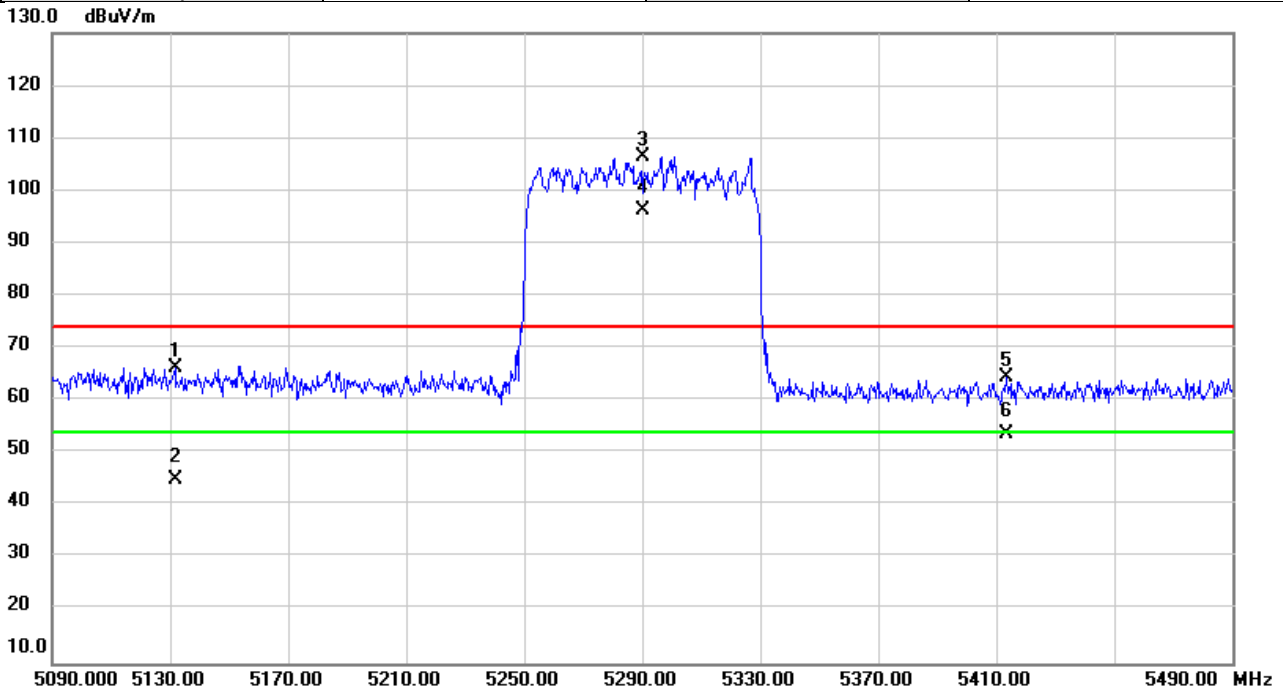


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5131.600	28.88	37.39	66.27	74.00	-7.73	peak	
2		5131.600	7.47	37.39	44.86	54.00	-9.14	AVG	
3	X	5290.000	68.89	37.52	106.41	74.00	32.41	peak	NoLimit
4	*	5290.000	58.86	37.52	96.38	54.00	42.38	AVG	NoLimit
5		5413.600	26.84	37.64	64.48	74.00	-9.52	peak	
6		5413.600	16.04	37.64	53.68	54.00	-0.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/6/11
Test Frequency	5530	Polarization	Vertical
Temp	23°C	Hum.	70%

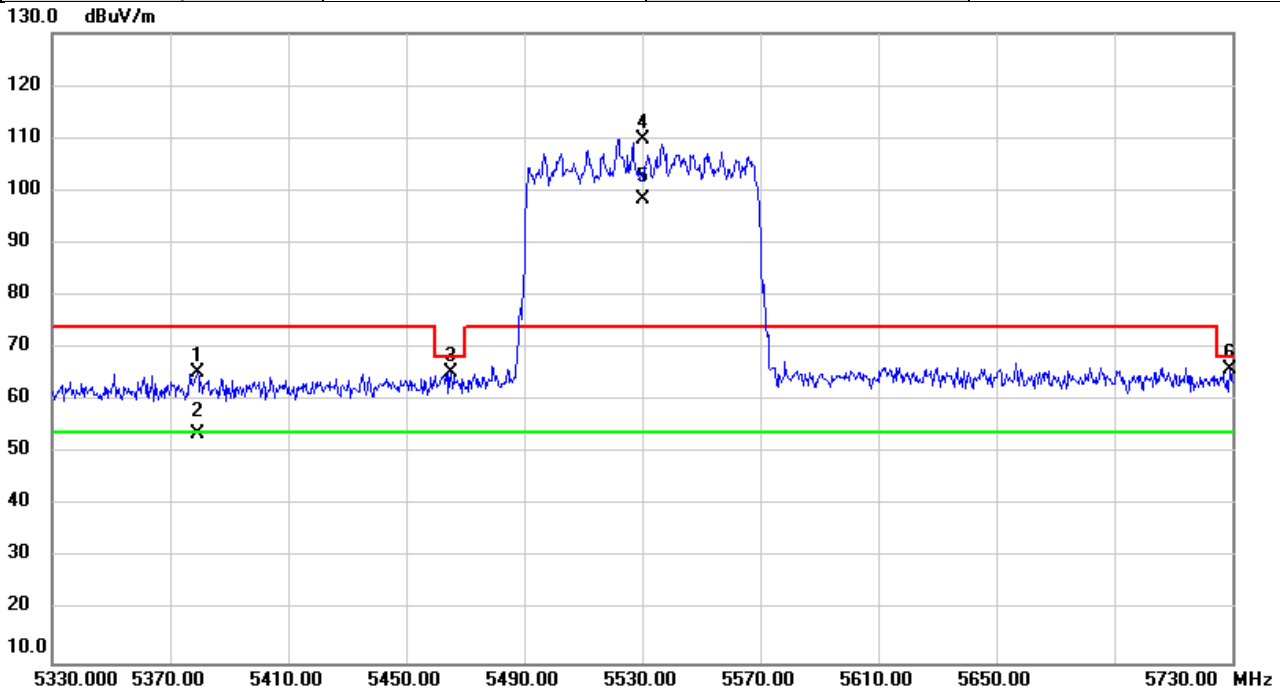


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5379.200	27.71	37.61	65.32	74.00	-8.68	peak	
2		5379.200	16.13	37.61	53.74	54.00	-0.26	AVG	
3		5465.200	27.66	37.68	65.34	68.20	-2.86	peak	
4	X	5530.000	72.02	37.78	109.80	74.00	35.80	peak	NoLimit
5	*	5530.000	60.55	37.78	98.33	54.00	44.33	AVG	NoLimit
6		5729.200	27.75	38.25	66.00	68.20	-2.20	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/7/1
Test Frequency	5610	Polarization	Vertical
Temp	22°C	Hum.	53%

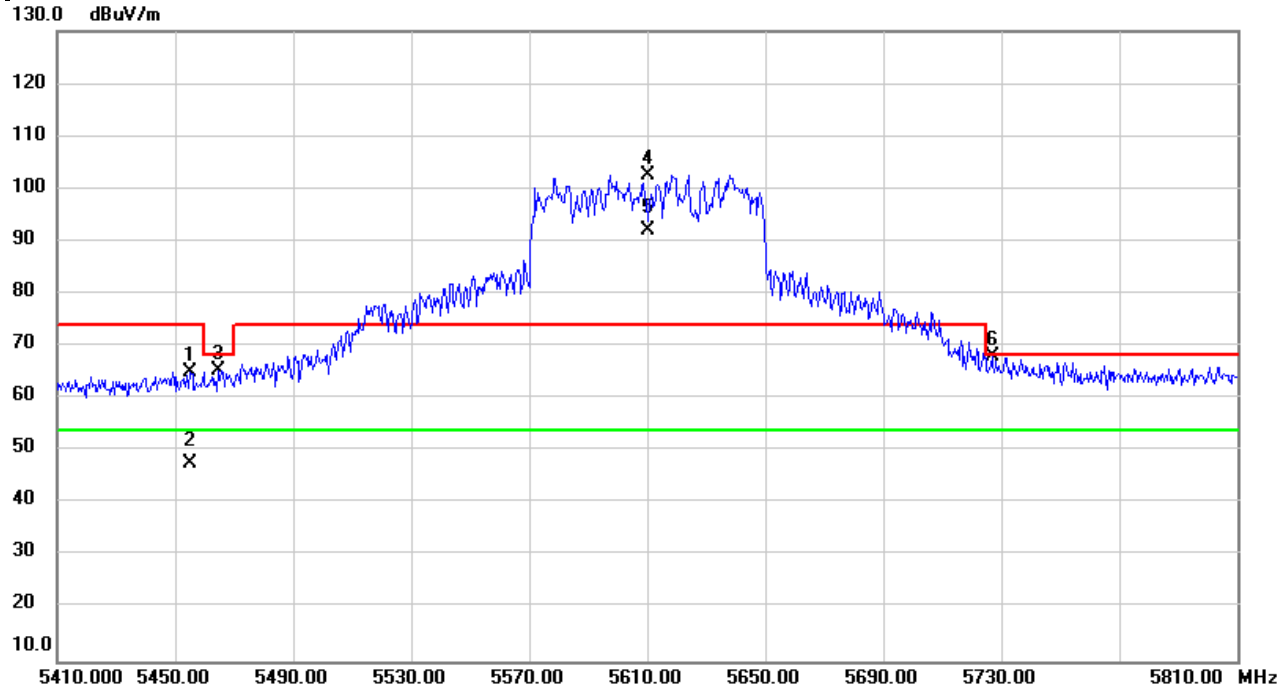

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5454.800	27.52	37.67	65.19	74.00	-8.81	peak	
2		5454.800	9.92	37.67	47.59	54.00	-6.41	AVG	
3		5464.800	27.73	37.68	65.41	68.20	-2.79	peak	
4	X	5610.000	64.68	37.96	102.64	74.00	28.64	peak	NoLimit
5	*	5610.000	54.08	37.96	92.04	54.00	38.04	AVG	NoLimit
6		5726.800	29.69	38.24	67.93	68.20	-0.27	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/6/11
Test Frequency	5775	Polarization	Vertical
Temp	23°C	Hum.	70%

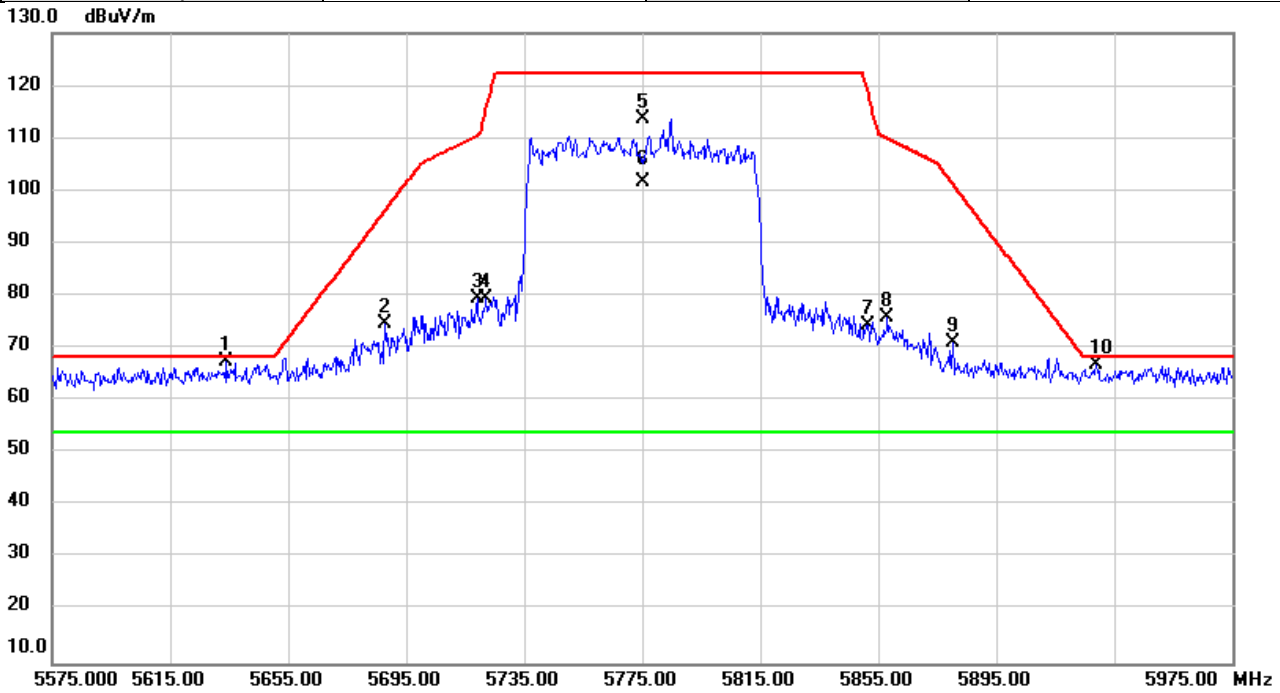


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5634.200	29.53	38.03	67.56	68.20	-0.64	peak	
2		5687.800	36.60	38.15	74.75	96.20	-21.45	peak	
3		5719.000	41.14	38.23	79.37	110.52	-31.15	peak	
4		5722.200	41.28	38.23	79.51	115.82	-36.31	peak	
5		5775.000	75.17	38.35	113.52	122.20	-8.68	peak	NoLimit
6	*	5775.000	63.27	38.35	101.62	54.00	47.62	AVG	NoLimit
7		5851.400	35.94	38.53	74.47	119.01	-44.54	peak	
8		5858.200	37.22	38.55	75.77	109.90	-34.13	peak	
9		5880.200	32.52	38.60	71.12	101.34	-30.22	peak	
10		5929.000	28.12	38.71	66.83	68.20	-1.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW160)	Test Date	2020/6/11
Test Frequency	5250	Polarization	Vertical
Temp	23°C	Hum.	70%

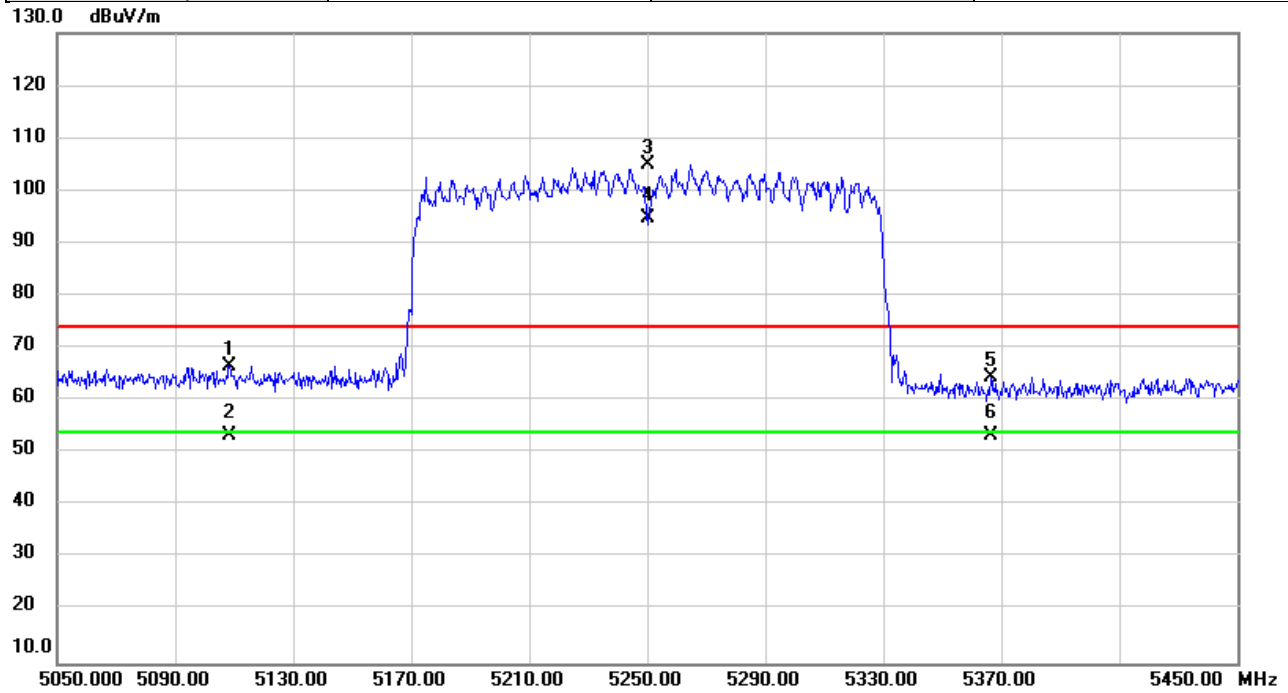


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5108.400	29.26	37.37	66.63	74.00	-7.37	peak	
2		5108.400	15.85	37.37	53.22	54.00	-0.78	AVG	
3	X	5250.000	67.33	37.49	104.82	74.00	30.82	peak	NoLimit
4	*	5250.000	57.40	37.49	94.89	54.00	40.89	AVG	NoLimit
5		5366.400	27.00	37.59	64.59	74.00	-9.41	peak	
6		5366.400	15.89	37.59	53.48	54.00	-0.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ax (HEW160)	Test Date	2020/6/11
Test Frequency	5570	Polarization	Vertical
Temp	23°C	Hum.	70%

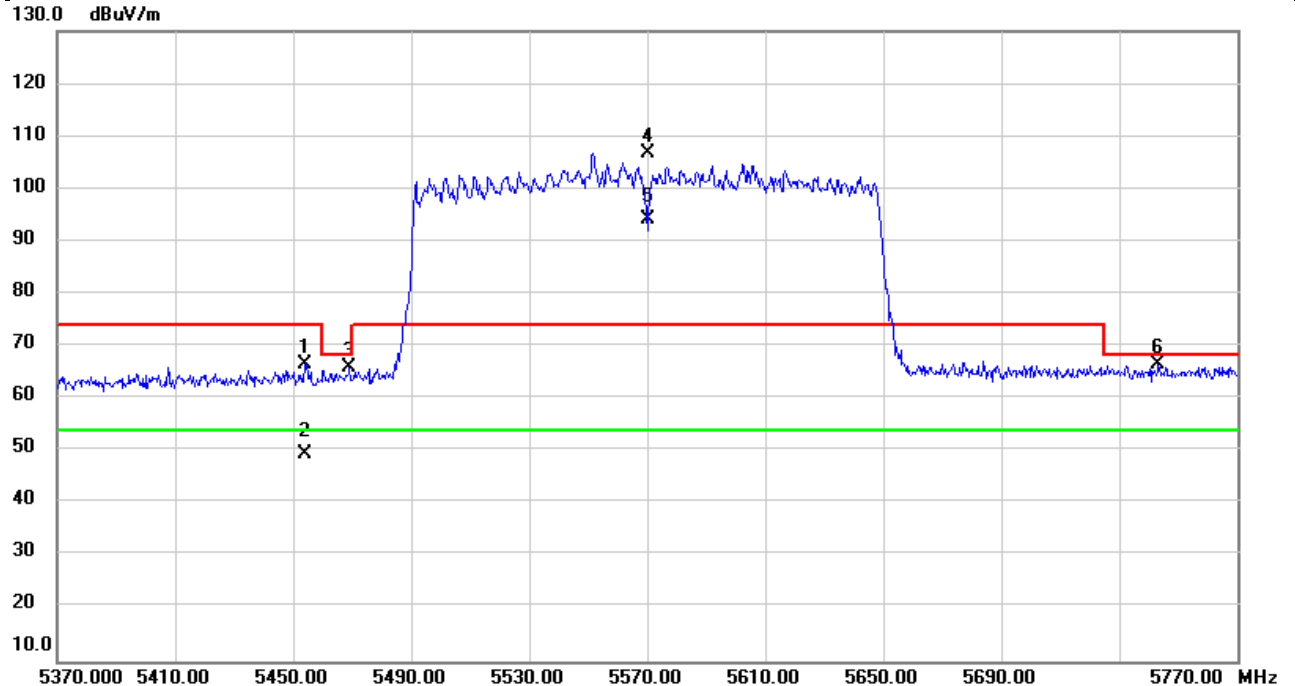

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5454.000	28.96	37.67	66.63	74.00	-7.37	peak	
2		5454.000	11.79	37.67	49.46	54.00	-4.54	AVG	
3		5469.200	28.20	37.68	65.88	68.20	-2.32	peak	
4	X	5570.000	68.92	37.88	106.80	74.00	32.80	peak	NoLimit
5	*	5570.000	56.36	37.88	94.24	54.00	40.24	AVG	NoLimit
6		5743.200	28.18	38.28	66.46	68.20	-1.74	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5180	Polarization	Vertical
Temp	20°C	Hum.	53%

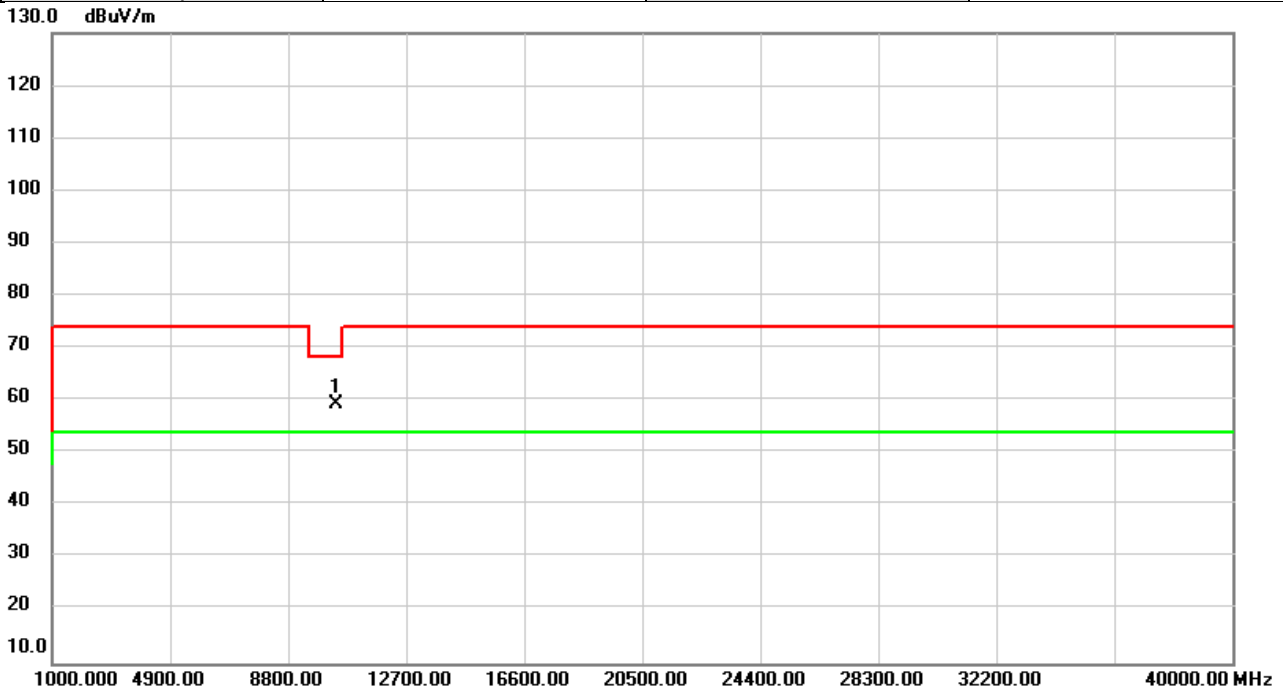


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	54.52	4.73	59.25	68.20	-8.95	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5180	Polarization	Horizontal
Temp	20°C	Hum.	53%

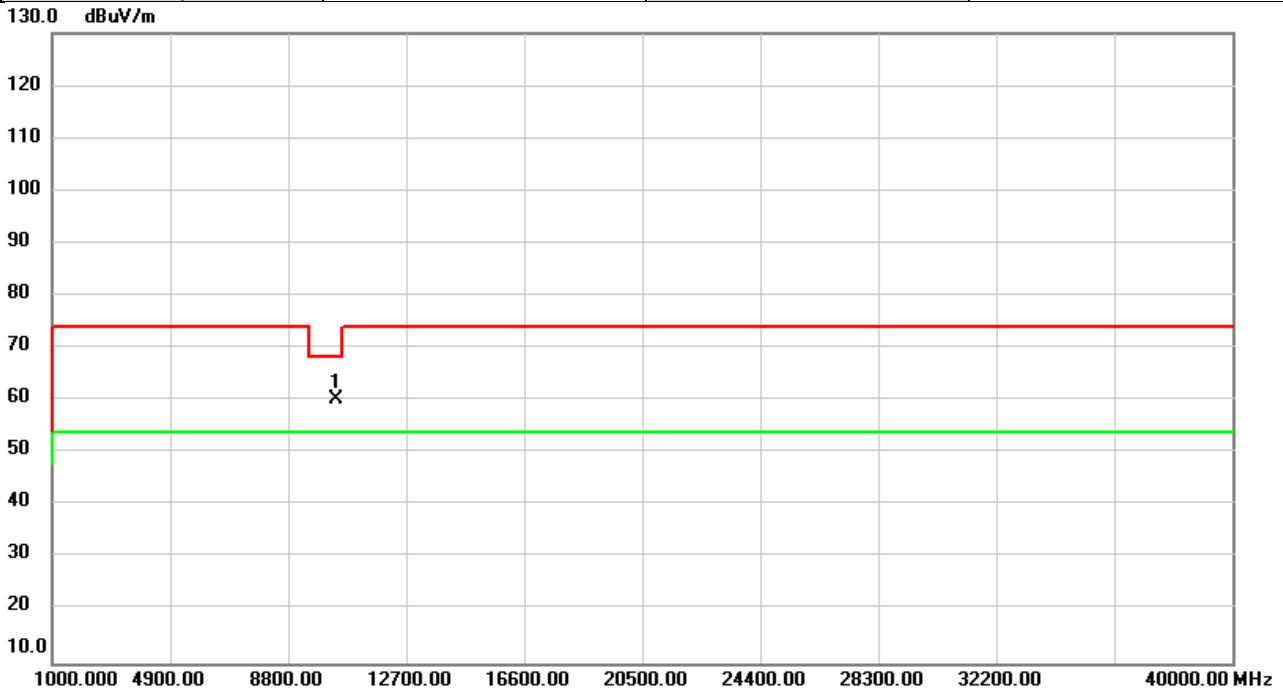


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	55.39	4.73	60.12	68.20	-8.08	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5200	Polarization	Vertical
Temp	20°C	Hum.	53%

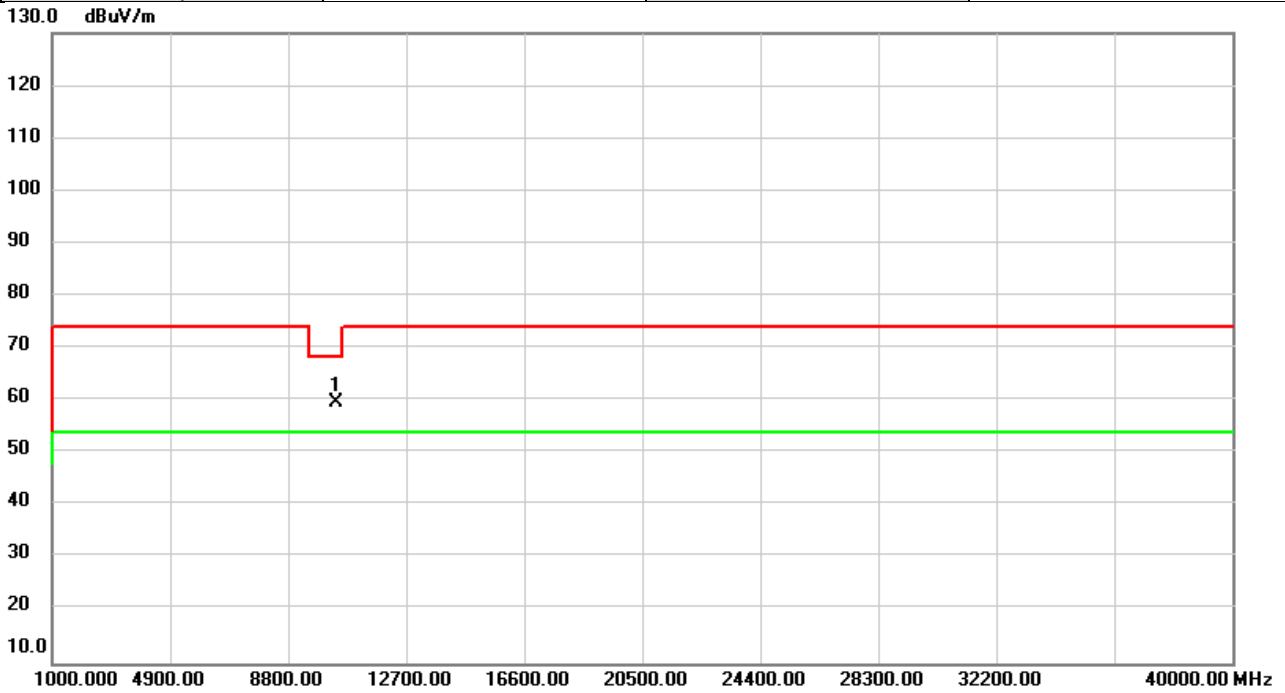


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	54.88	4.80	59.68	68.20	-8.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5200	Polarization	Horizontal
Temp	20°C	Hum.	53%

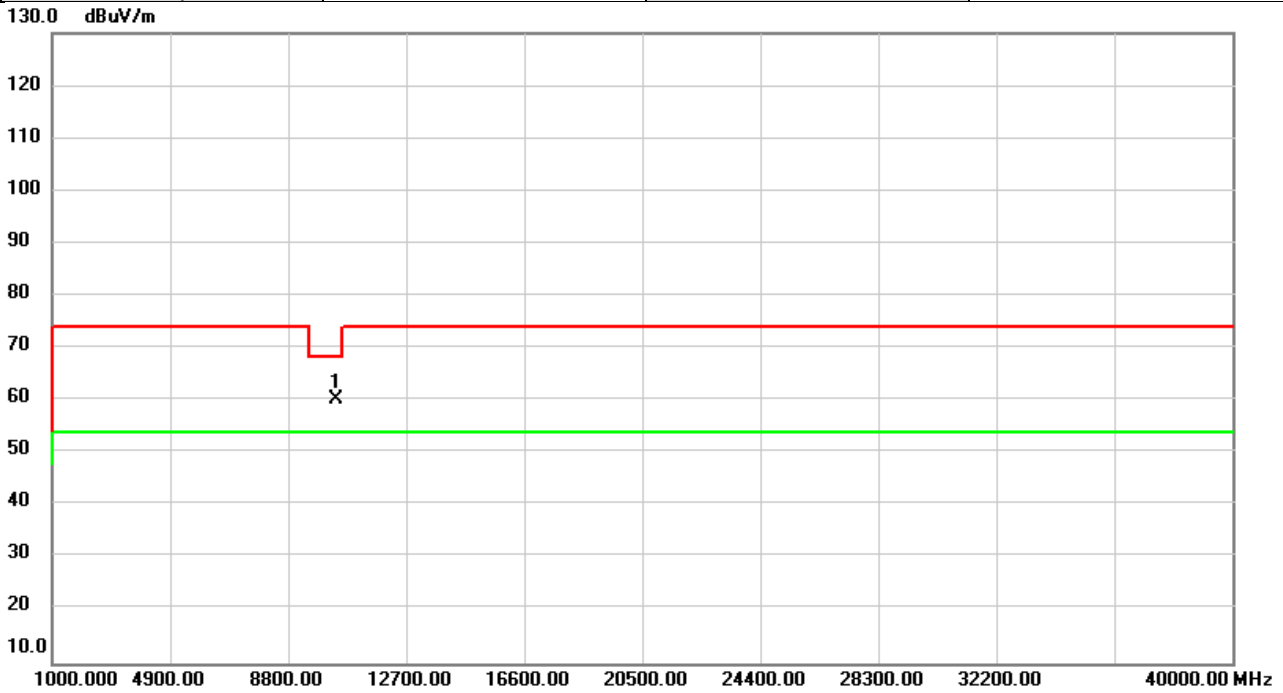


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	55.37	4.80	60.17	68.20	-8.03	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5240	Polarization	Vertical
Temp	20°C	Hum.	53%

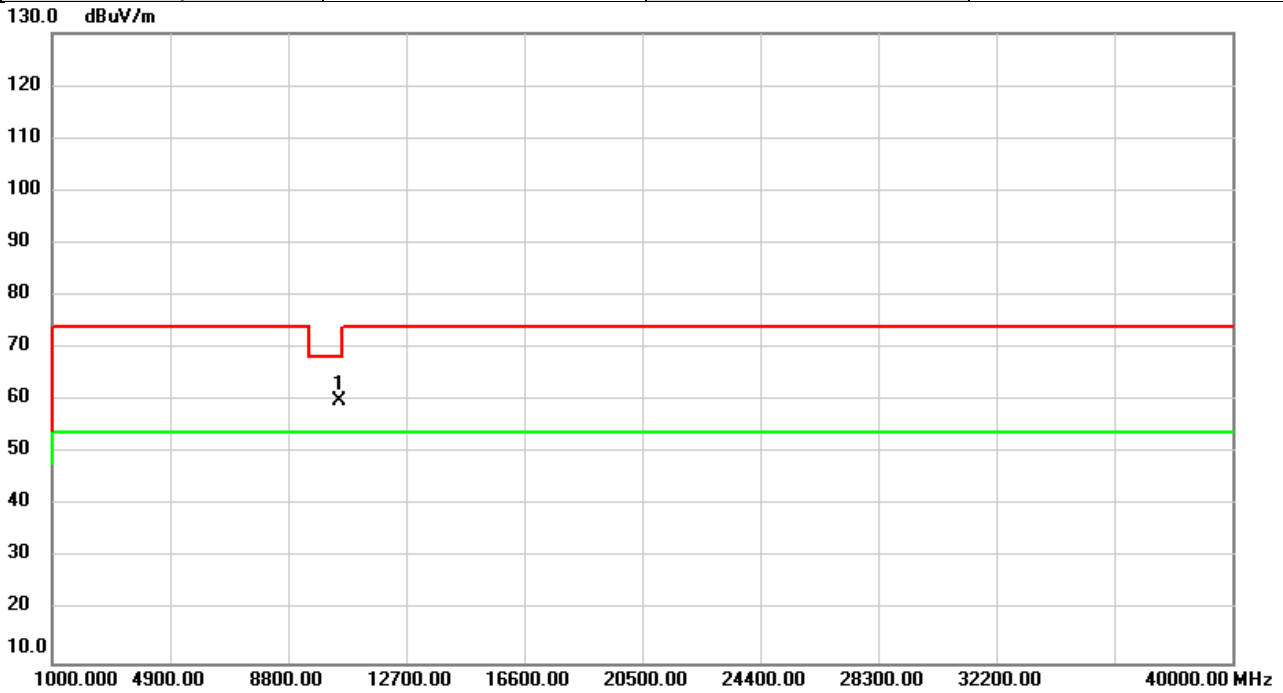


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	54.88	4.96	59.84	68.20	-8.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5240	Polarization	Horizontal
Temp	20°C	Hum.	53%

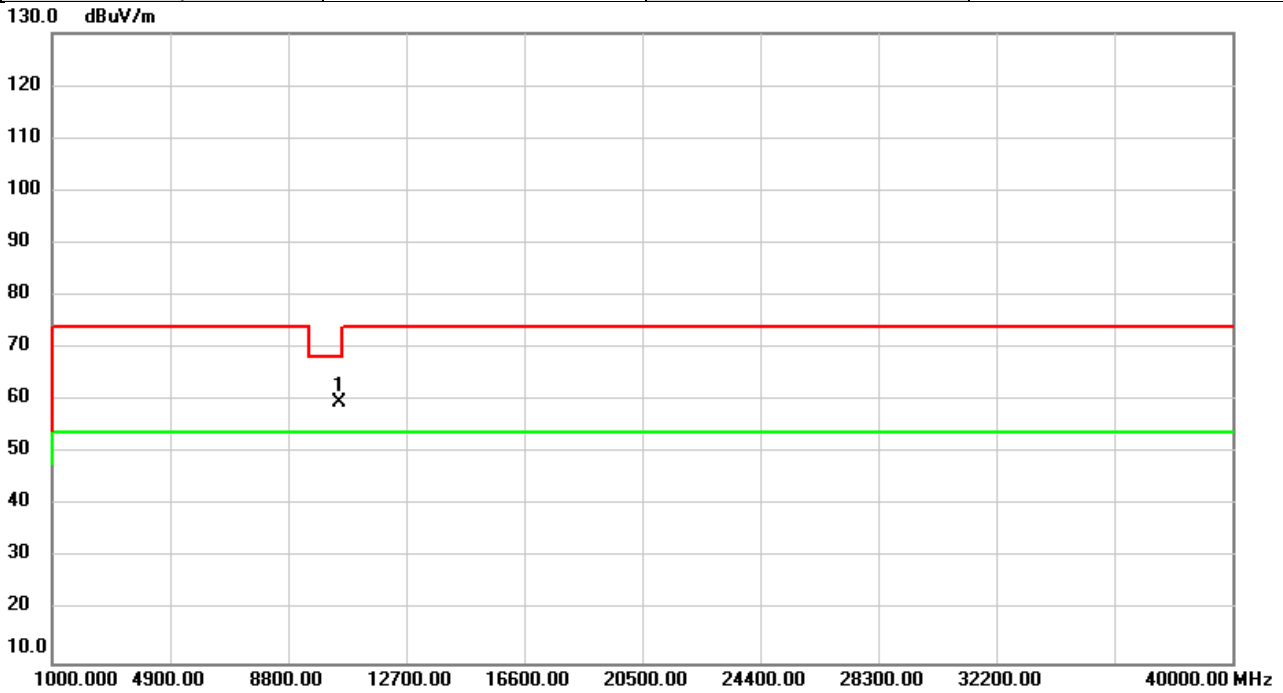


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	54.81	4.96	59.77	68.20	-8.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5260	Polarization	Vertical
Temp	20°C	Hum.	53%

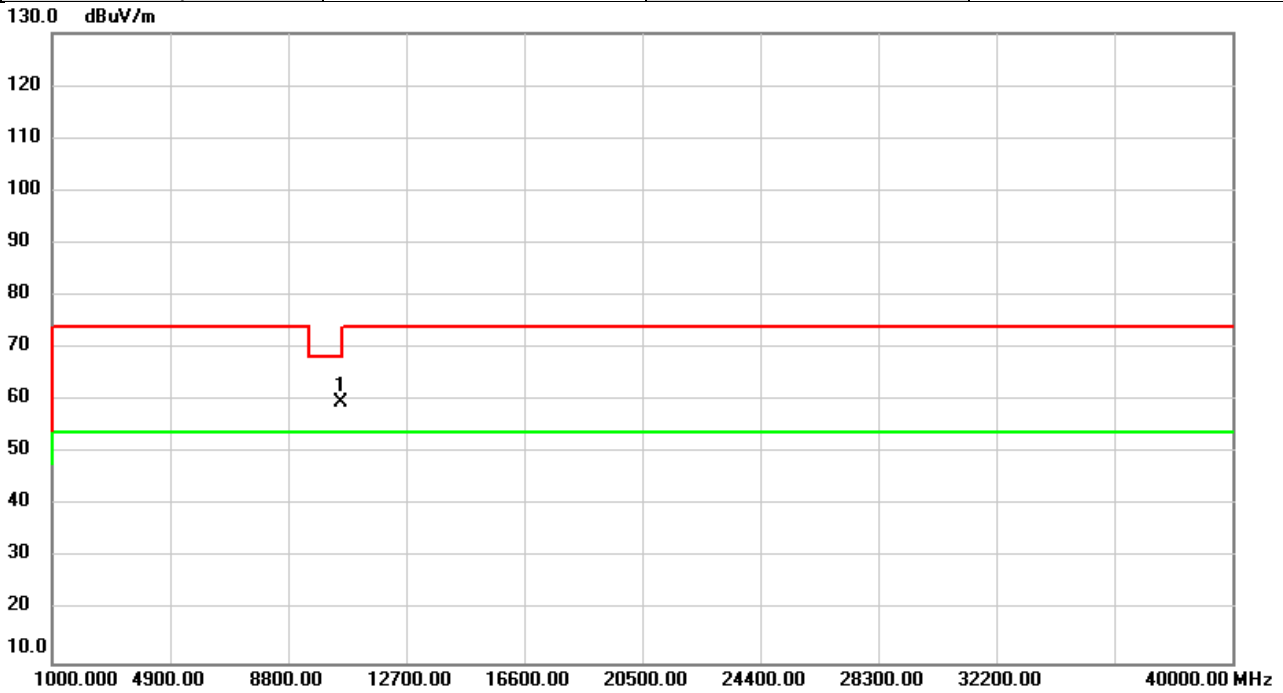


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	54.55	5.06	59.61	68.20	-8.59	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5260	Polarization	Horizontal
Temp	20°C	Hum.	53%

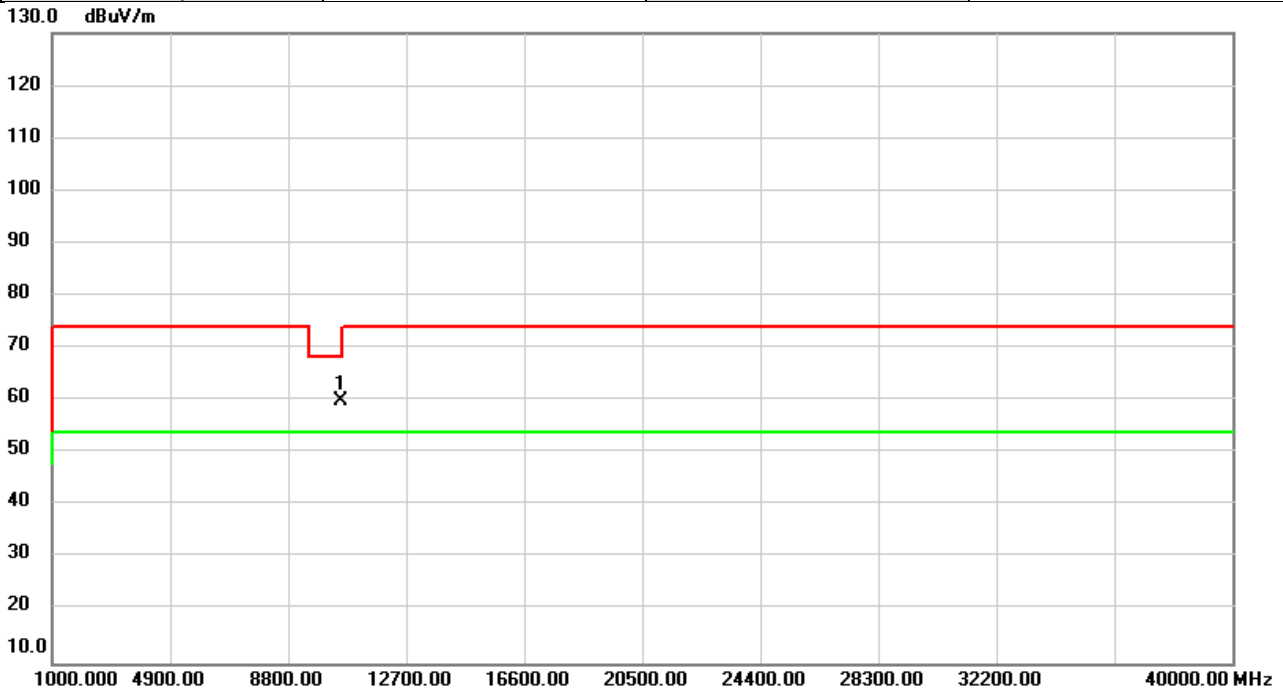


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	54.85	5.06	59.91	68.20	-8.29	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5300	Polarization	Vertical
Temp	20°C	Hum.	53%

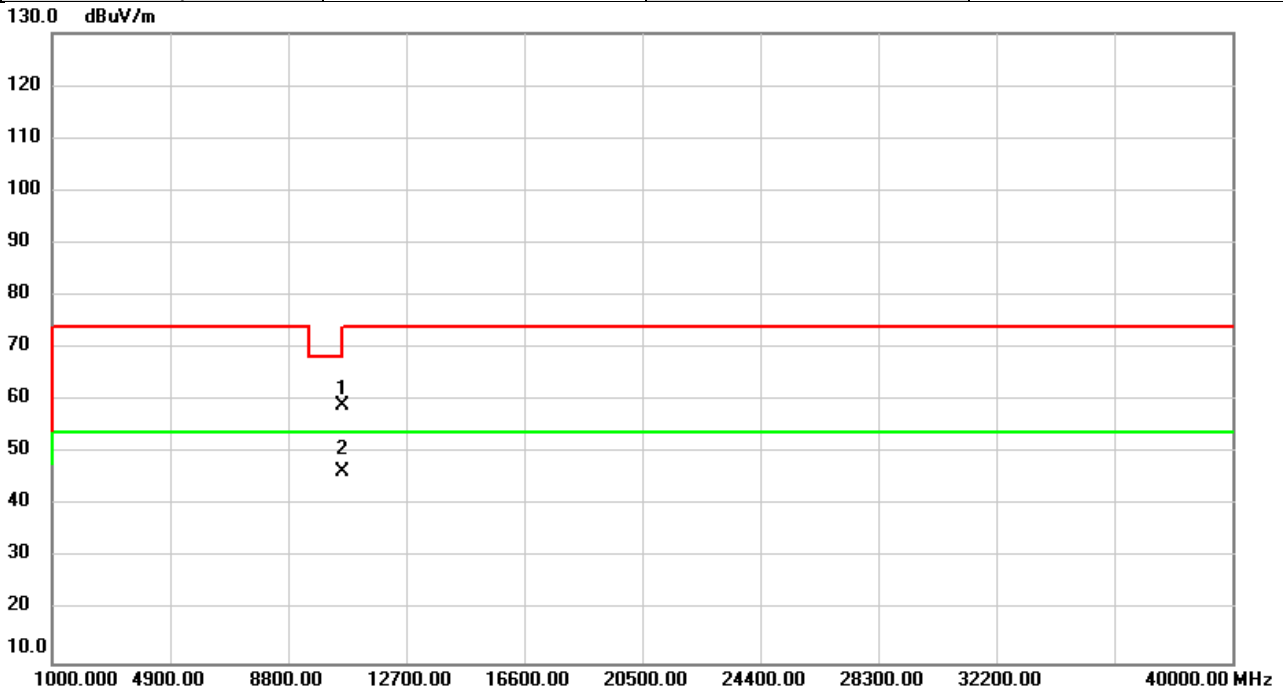


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10600.00	53.62	5.31	58.93	68.20	-9.27	peak	
2	*	10600.00	41.00	5.31	46.31	54.00	-7.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5300	Polarization	Horizontal
Temp	20°C	Hum.	53%

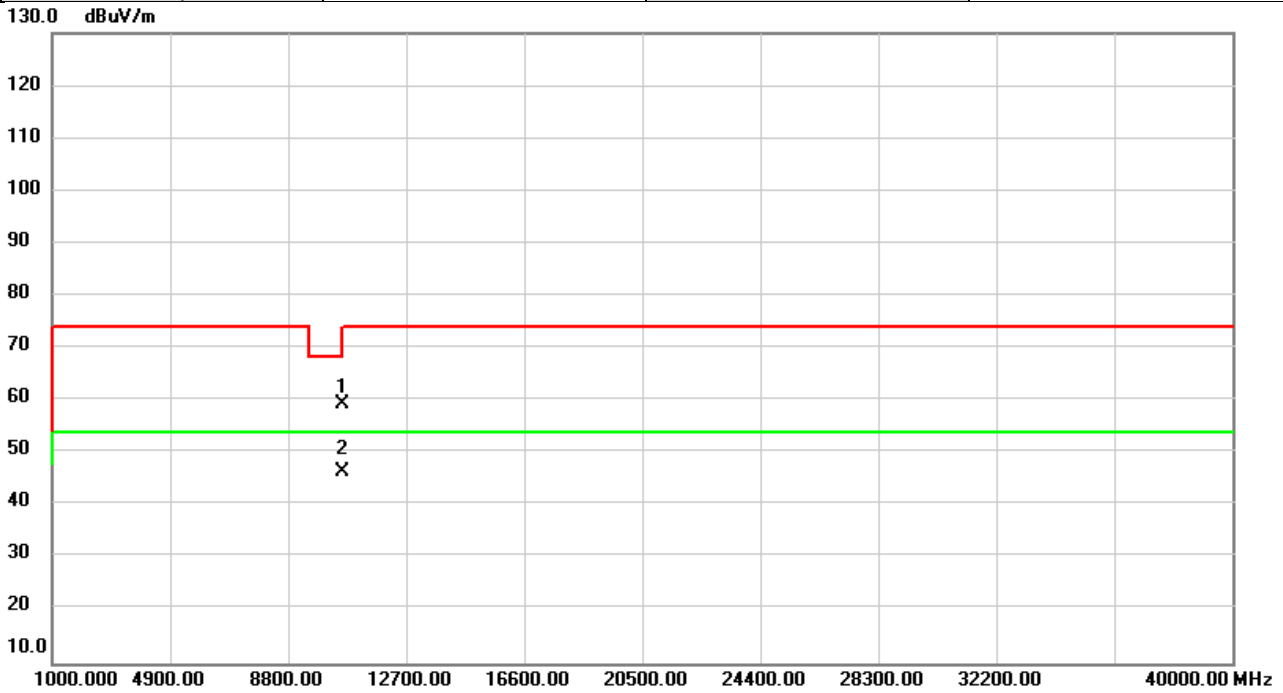


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10600.00	54.11	5.31	59.42	68.20	-8.78	peak	
2	*	10600.00	41.23	5.31	46.54	54.00	-7.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5320	Polarization	Vertical
Temp	20°C	Hum.	53%

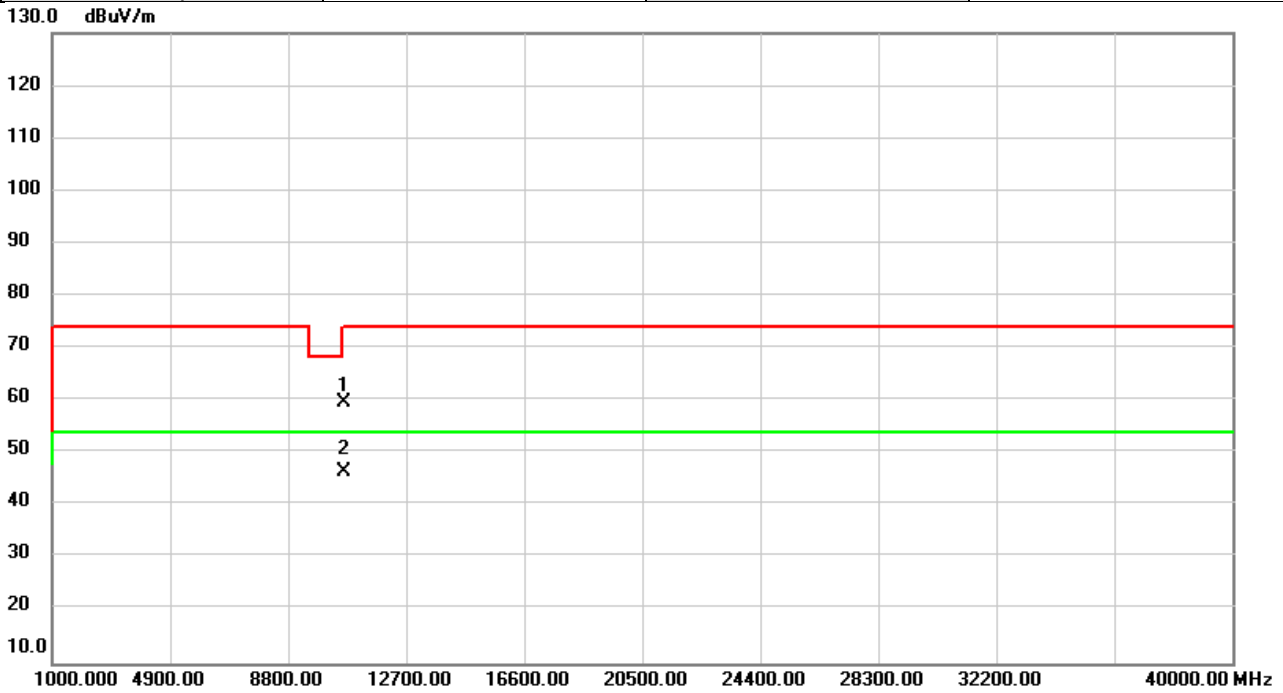


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	54.08	5.43	59.51	74.00	-14.49	peak	
2	*	10640.00	41.16	5.43	46.59	54.00	-7.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5320	Polarization	Horizontal
Temp	20°C	Hum.	53%

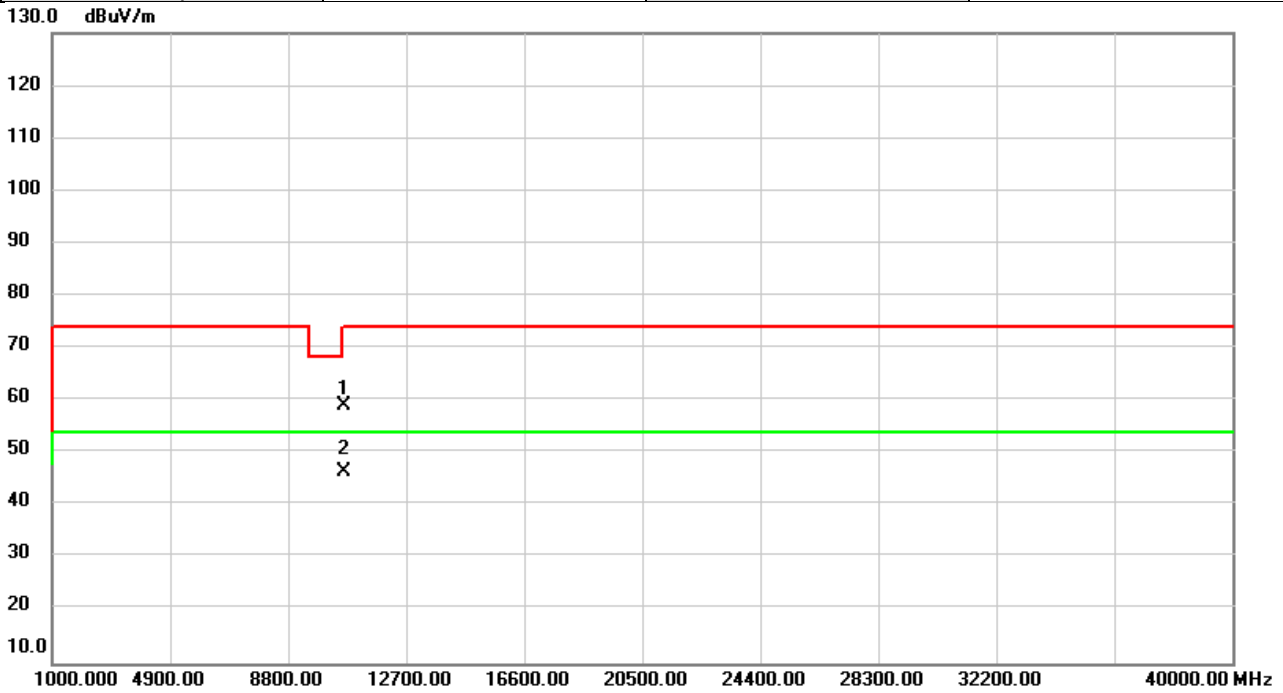


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	53.76	5.43	59.19	74.00	-14.81	peak	
2	*	10640.00	41.15	5.43	46.58	54.00	-7.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5500	Polarization	Vertical
Temp	20°C	Hum.	53%

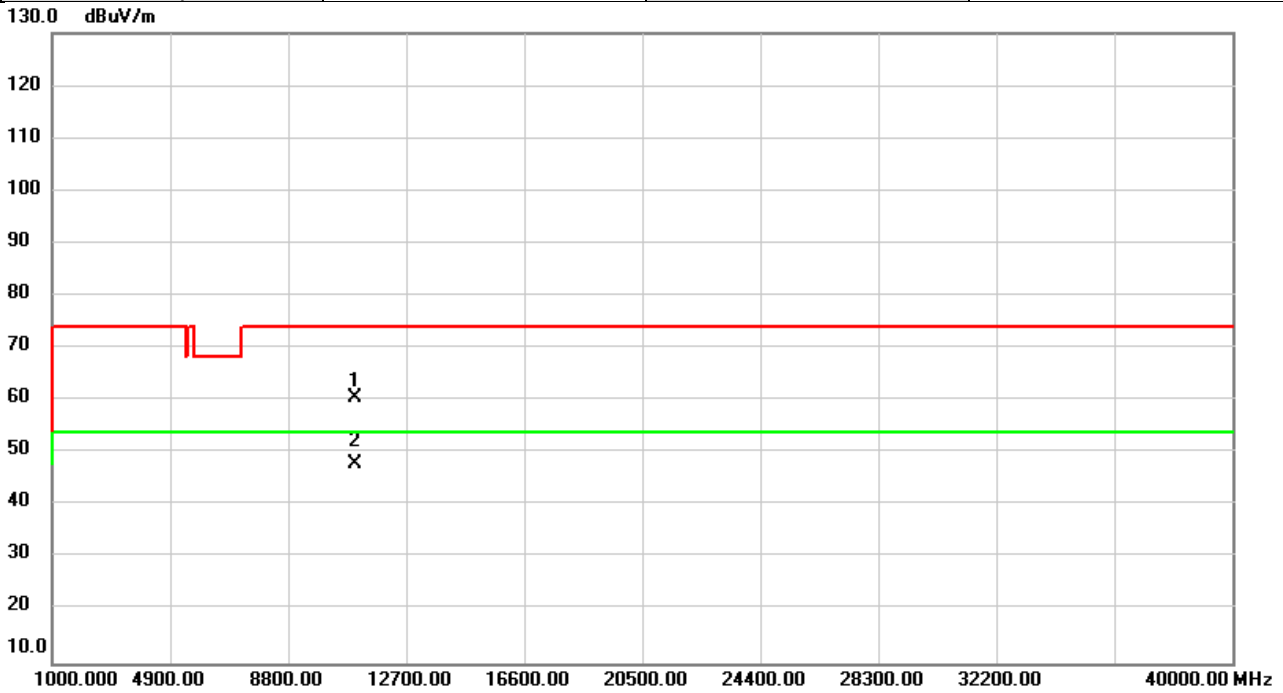


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11000.00	54.15	6.54	60.69	74.00	-13.31	peak	
2	*	11000.00	41.53	6.54	48.07	54.00	-5.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5500	Polarization	Horizontal
Temp	20°C	Hum.	53%

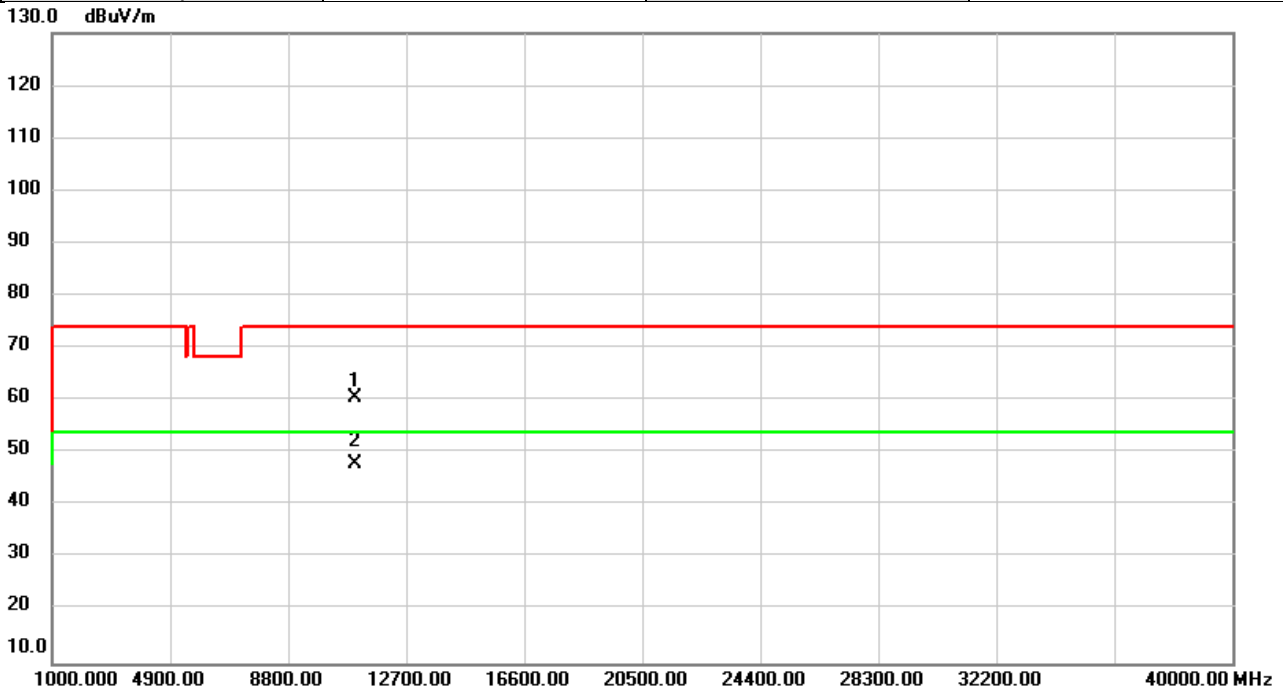


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11000.00	54.09	6.54	60.63	74.00	-13.37	peak	
2	*	11000.00	41.55	6.54	48.09	54.00	-5.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5580	Polarization	Vertical
Temp	20°C	Hum.	53%

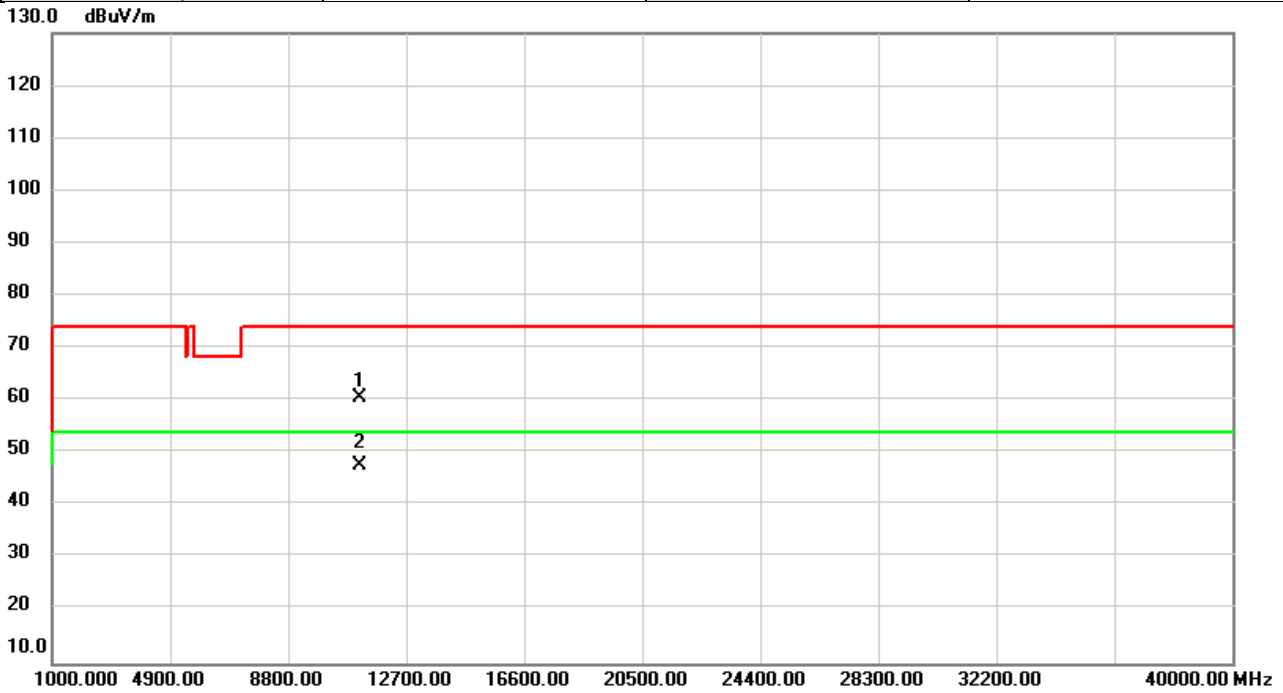


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11160.00	54.38	6.05	60.43	74.00	-13.57	peak	
2	*	11160.00	41.69	6.05	47.74	54.00	-6.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5580	Polarization	Horizontal
Temp	20°C	Hum.	53%

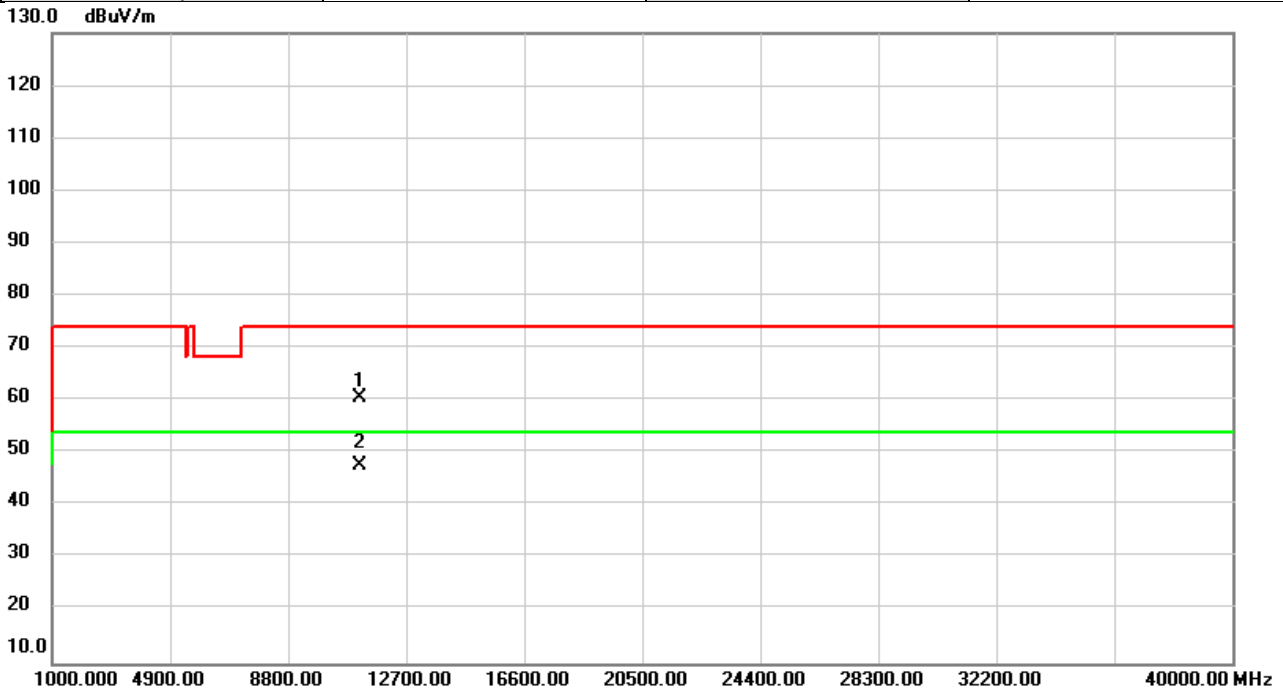


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11160.00	54.48	6.05	60.53	74.00	-13.47	peak	
2	*	11160.00	41.62	6.05	47.67	54.00	-6.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5700	Polarization	Vertical
Temp	20°C	Hum.	53%

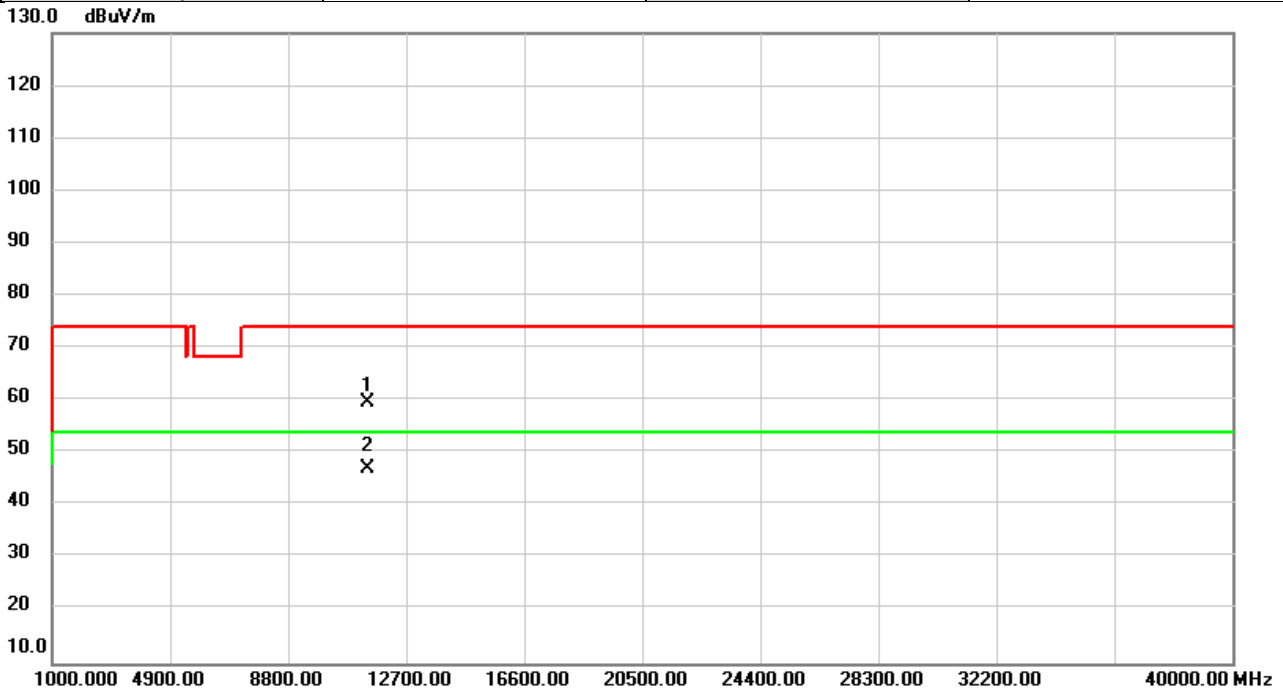


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11400.00	54.38	5.33	59.71	74.00	-14.29	peak	
2	*	11400.00	41.67	5.33	47.00	54.00	-7.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/24
Test Frequency	5700	Polarization	Horizontal
Temp	20°C	Hum.	53%

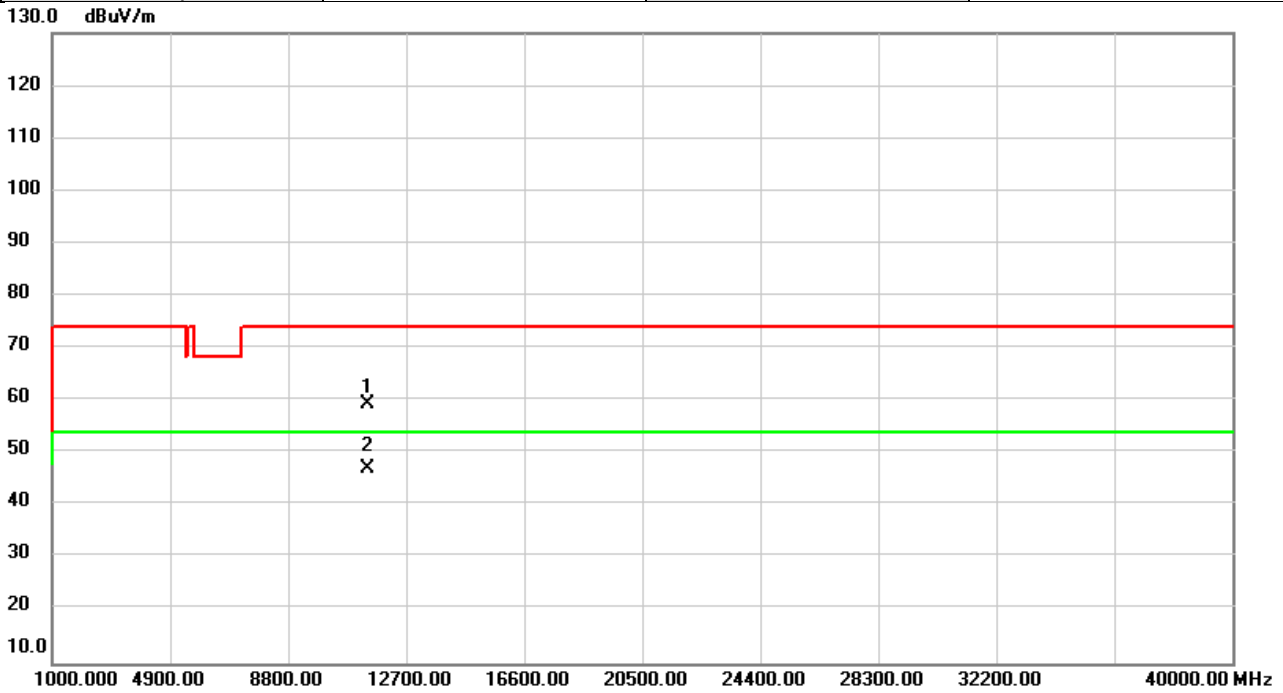


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11400.00	54.03	5.33	59.36	74.00	-14.64	peak	
2	*	11400.00	41.70	5.33	47.03	54.00	-6.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/25
Test Frequency	5745	Polarization	Vertical
Temp	20°C	Hum.	53%

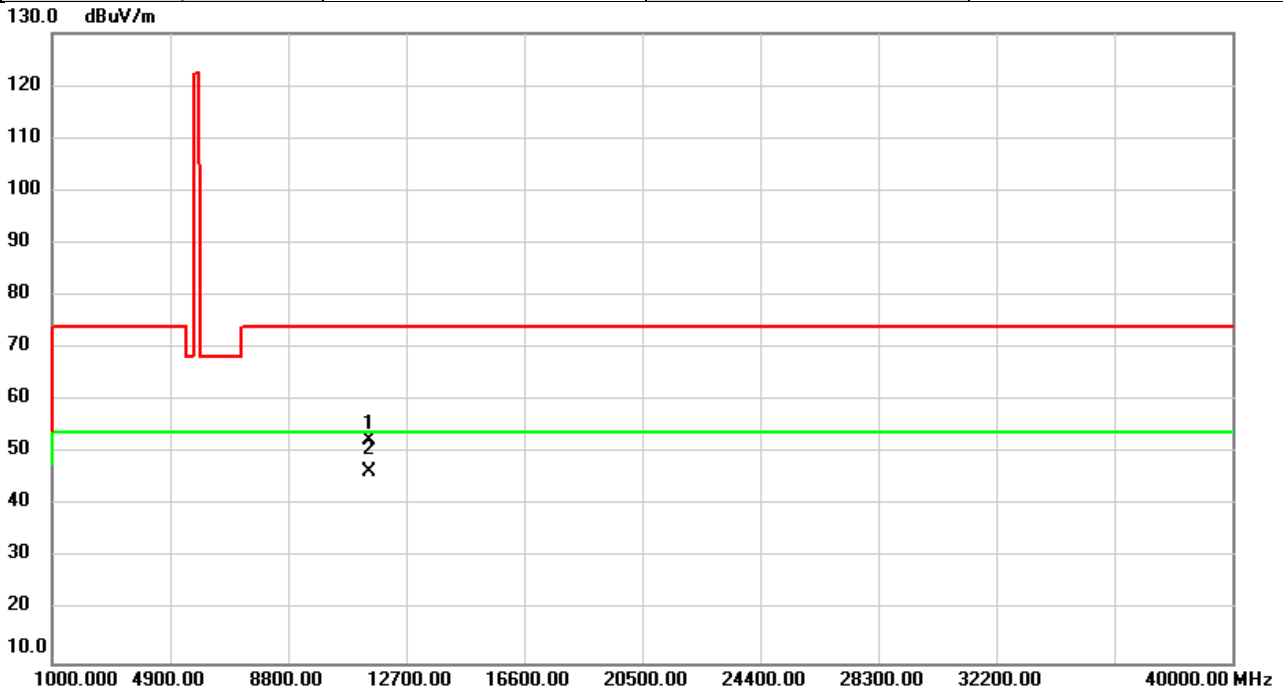


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11490.00	47.36	5.06	52.42	74.00	-21.58	peak	
2	*	11490.00	41.42	5.06	46.48	54.00	-7.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/25
Test Frequency	5745	Polarization	Horizontal
Temp	20°C	Hum.	53%

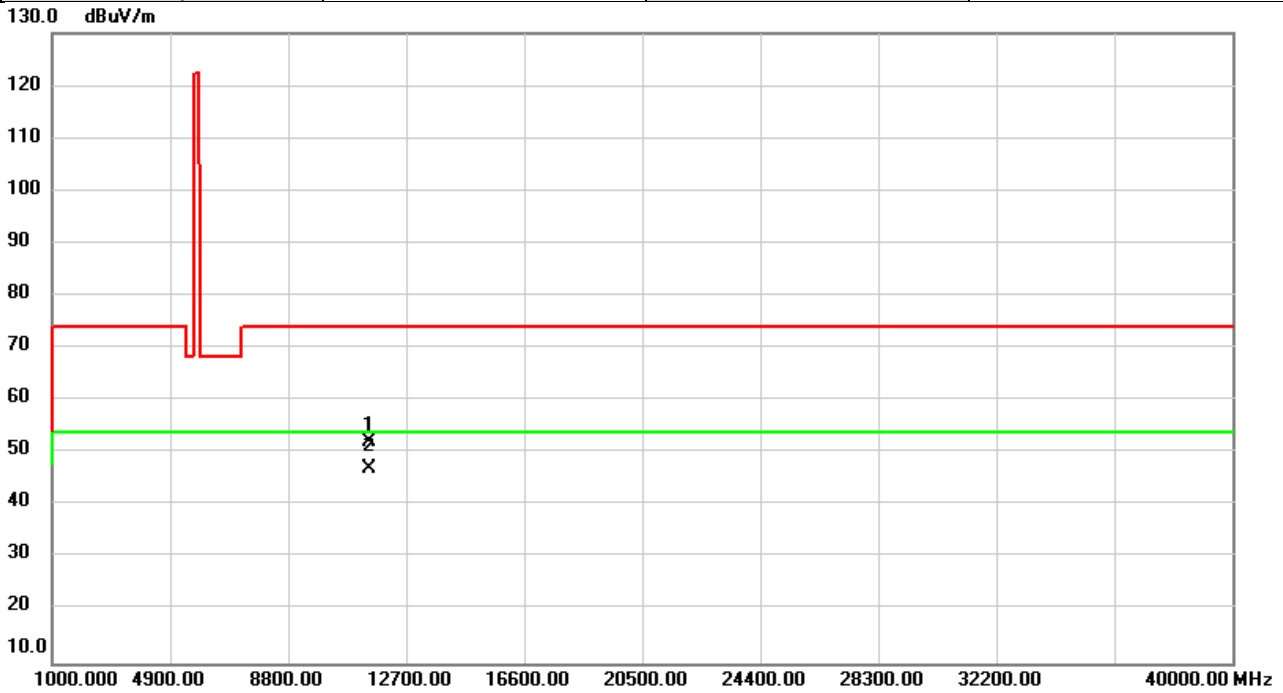


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11490.00	47.12	5.06	52.18	74.00	-21.82	peak	
2	*	11490.00	41.89	5.06	46.95	54.00	-7.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/25
Test Frequency	5785	Polarization	Vertical
Temp	20°C	Hum.	53%

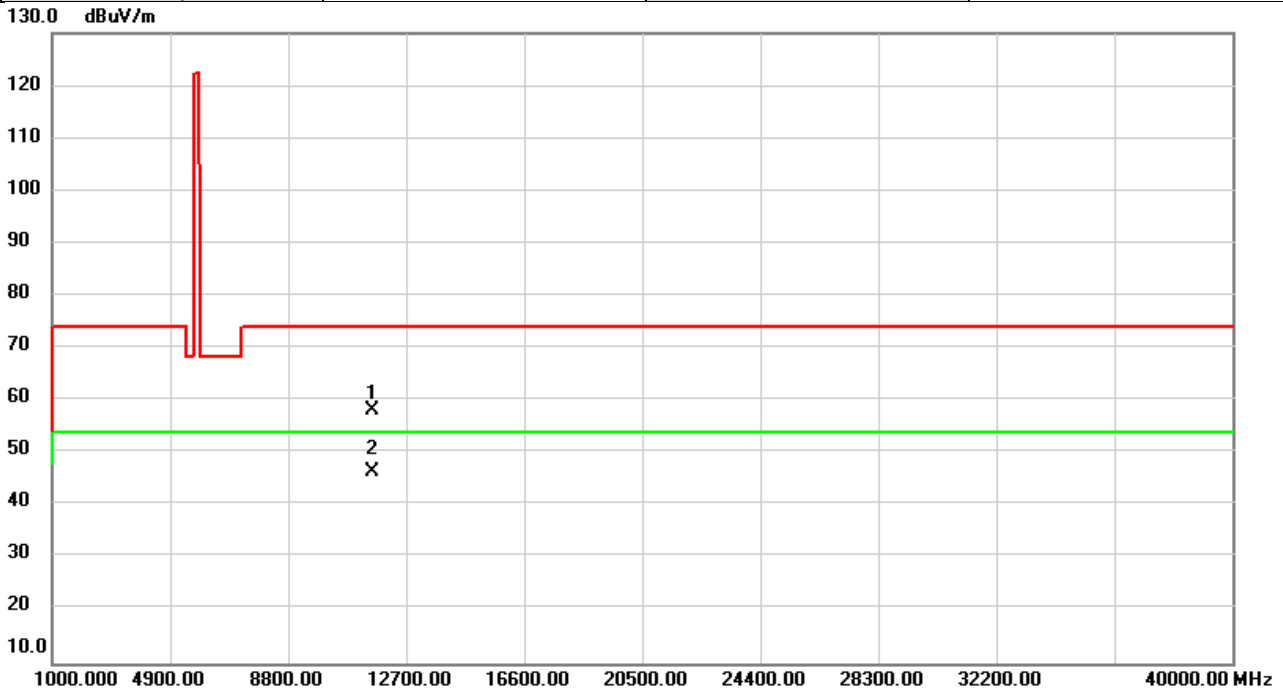


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.00	53.34	4.87	58.21	74.00	-15.79	peak	
2	*	11570.00	41.52	4.87	46.39	54.00	-7.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/25
Test Frequency	5785	Polarization	Horizontal
Temp	20°C	Hum.	53%

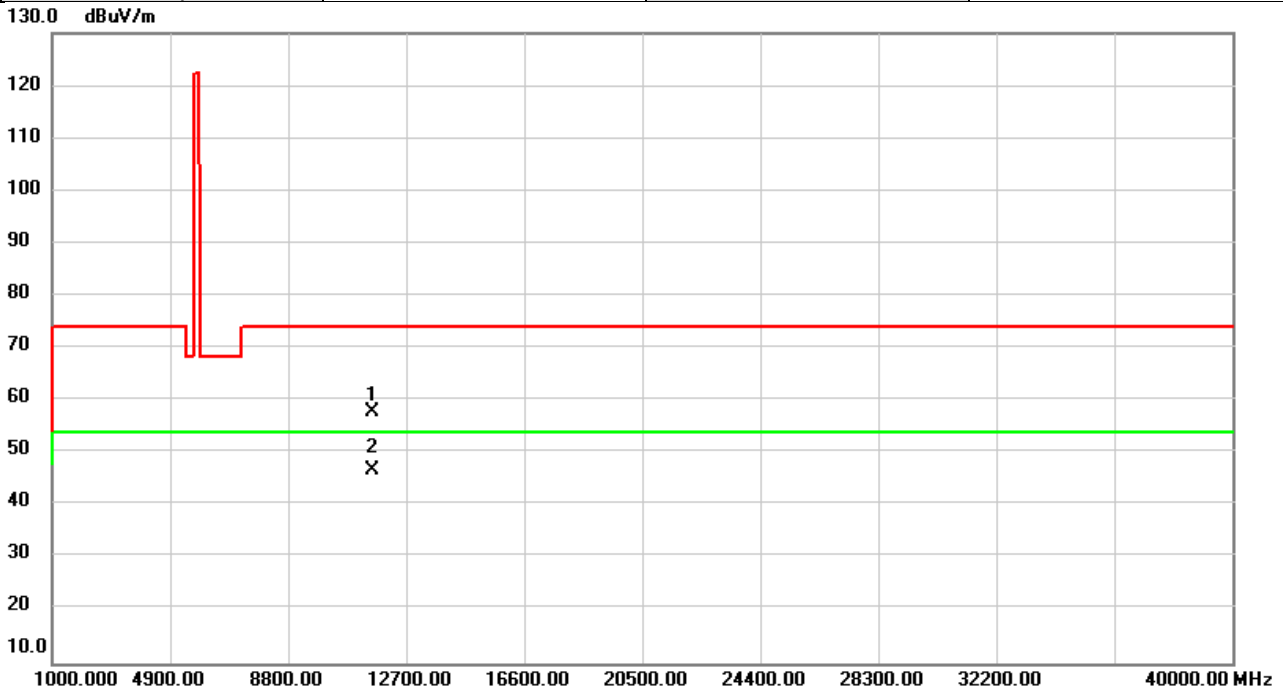


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.00	52.97	4.87	57.84	74.00	-16.16	peak	
2	*	11570.00	41.81	4.87	46.68	54.00	-7.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/25
Test Frequency	5825	Polarization	Vertical
Temp	20°C	Hum.	53%

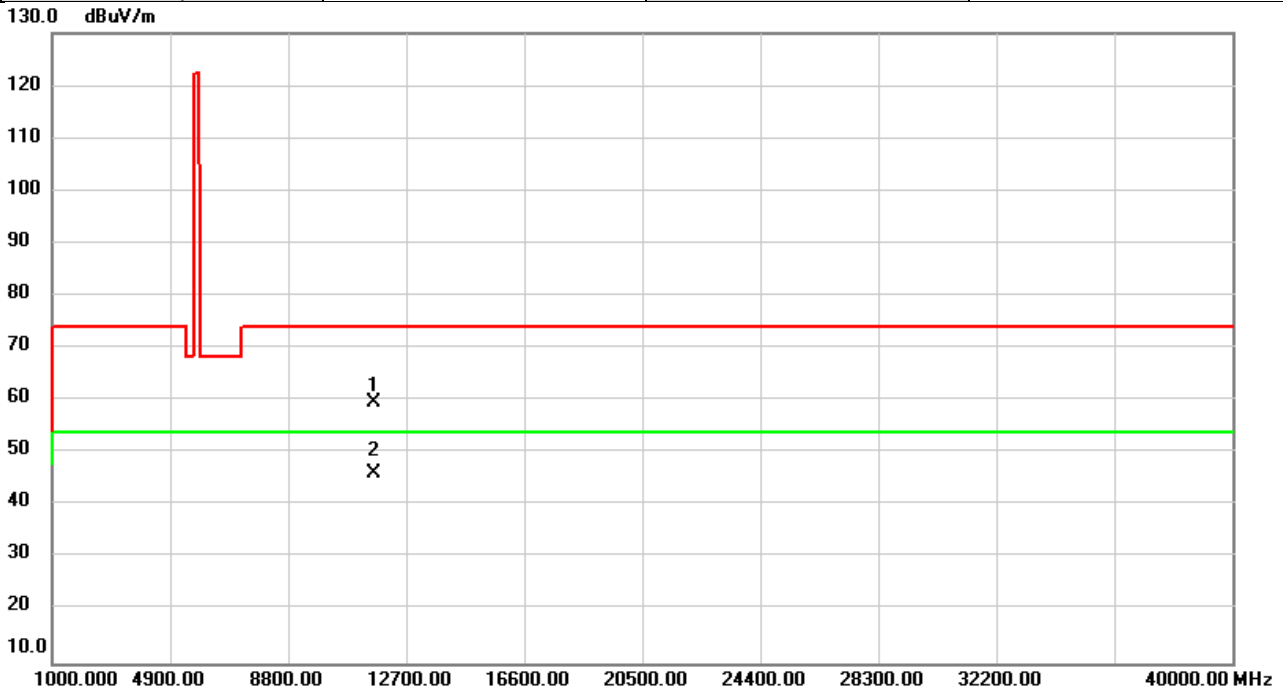


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11650.00	54.91	4.69	59.60	74.00	-14.40	peak	
2	*	11650.00	41.46	4.69	46.15	54.00	-7.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/25
Test Frequency	5825	Polarization	Horizontal
Temp	20°C	Hum.	53%

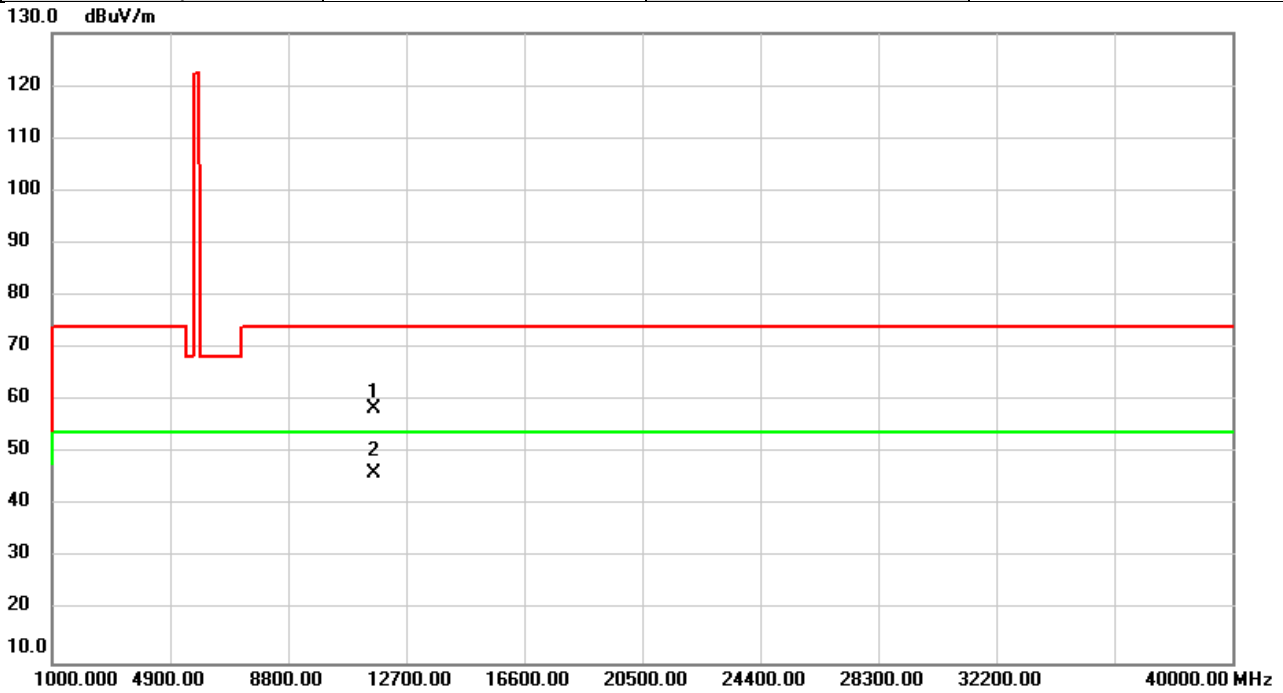


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11650.00	53.79	4.69	58.48	74.00	-15.52	peak	
2	*	11650.00	41.50	4.69	46.19	54.00	-7.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2020/6/25
Test Frequency	5180	Polarization	Vertical
Temp	20°C	Hum.	53%

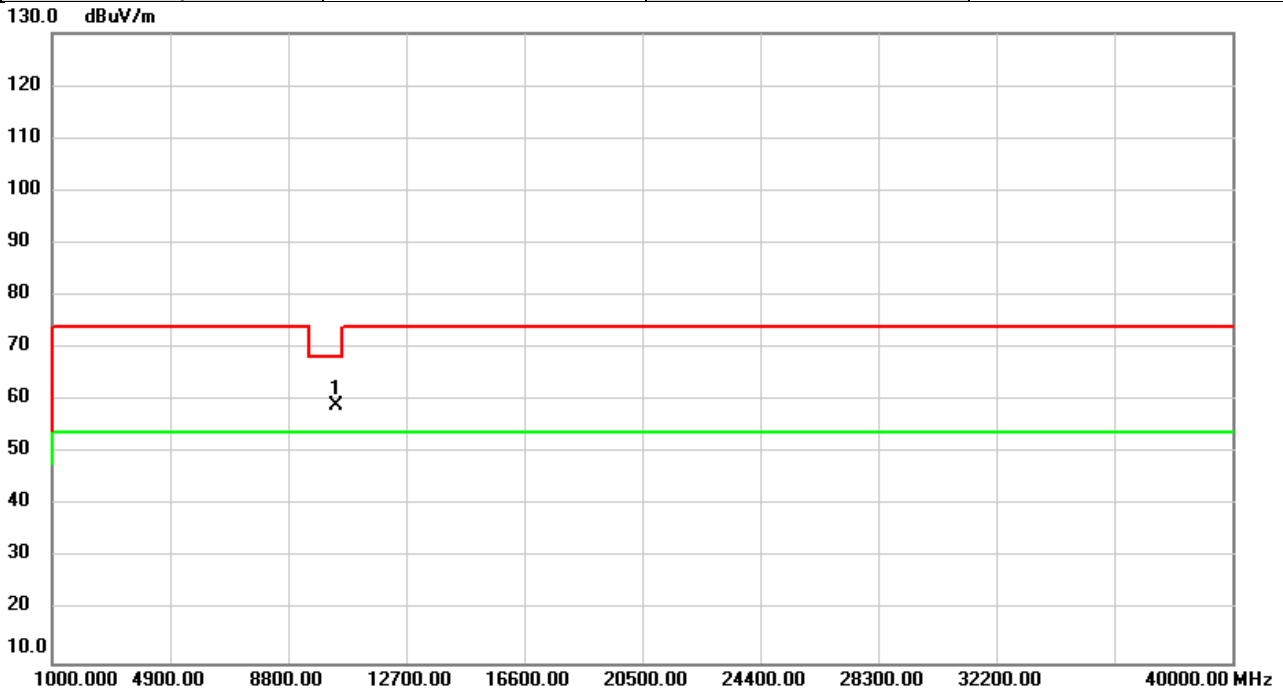


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	54.46	4.73	59.19	68.20	-9.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5180	Polarization	Horizontal
Temp	20°C	Hum.	53%

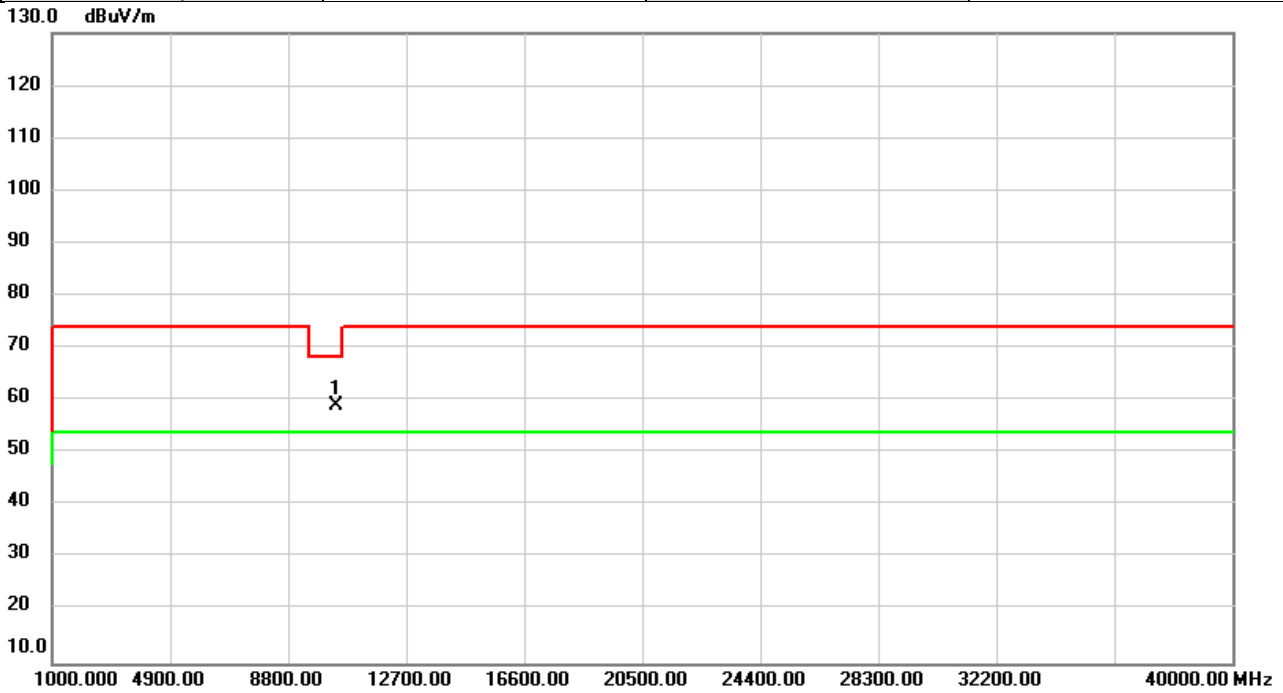


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	54.29	4.73	59.02	68.20	-9.18	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5200	Polarization	Vertical
Temp	20°C	Hum.	53%

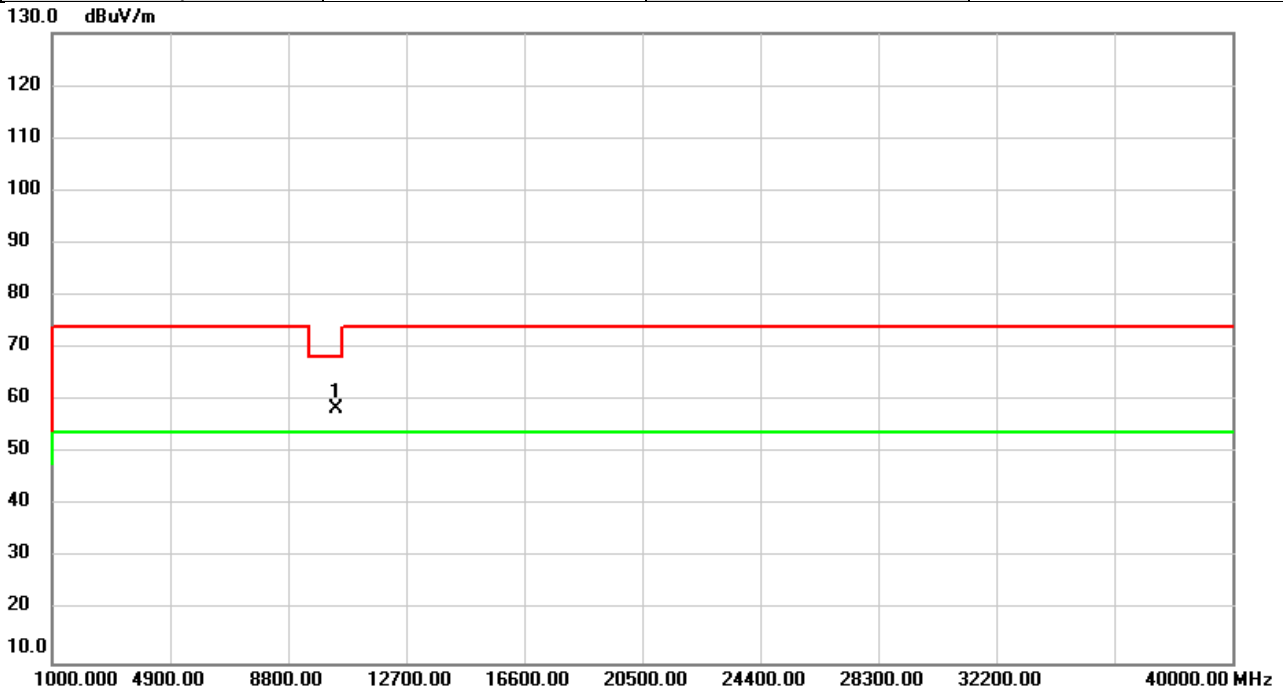


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	53.78	4.80	58.58	68.20	-9.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5200	Polarization	Horizontal
Temp	20°C	Hum.	53%

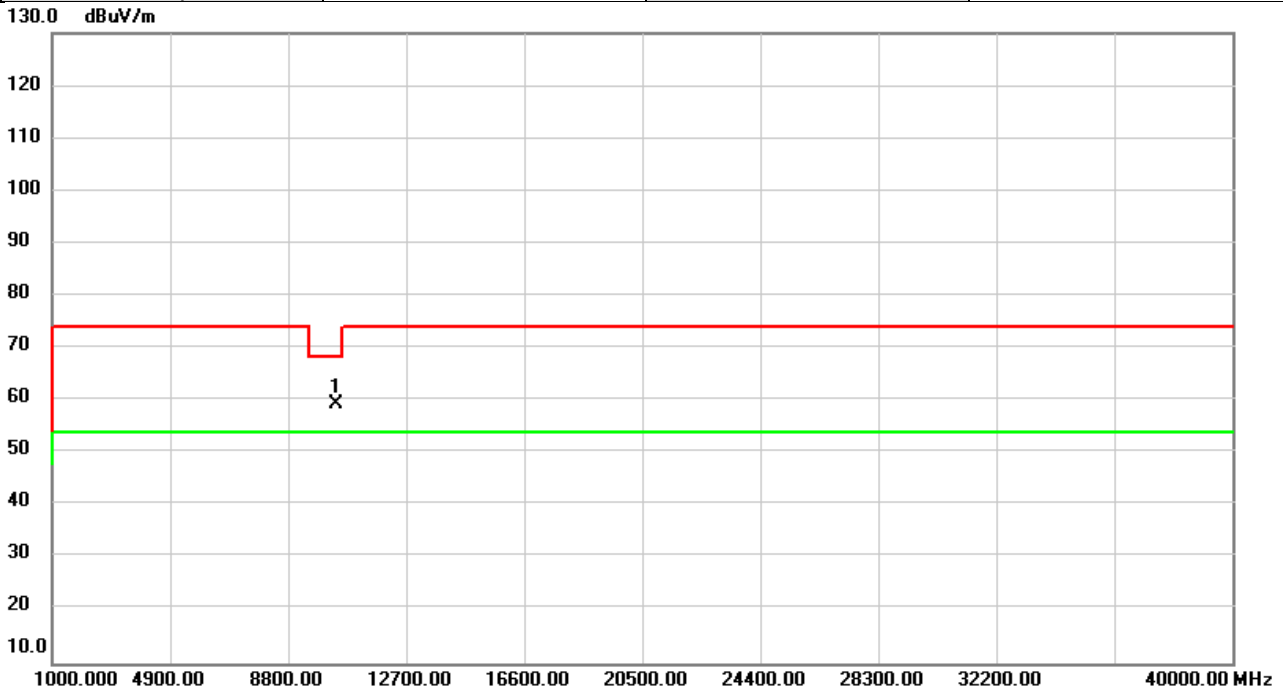


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	54.50	4.80	59.30	68.20	-8.90	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5240	Polarization	Vertical
Temp	20°C	Hum.	53%

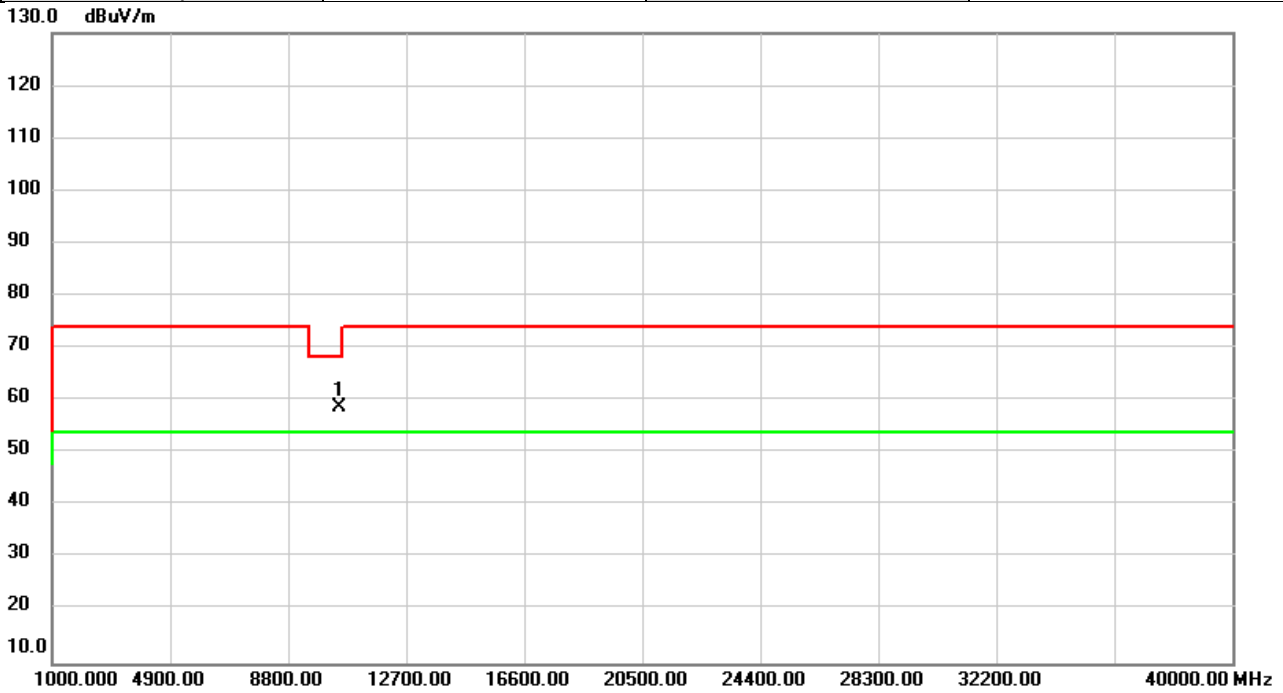


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	53.70	4.96	58.66	68.20	-9.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5240	Polarization	Horizontal
Temp	20°C	Hum.	53%

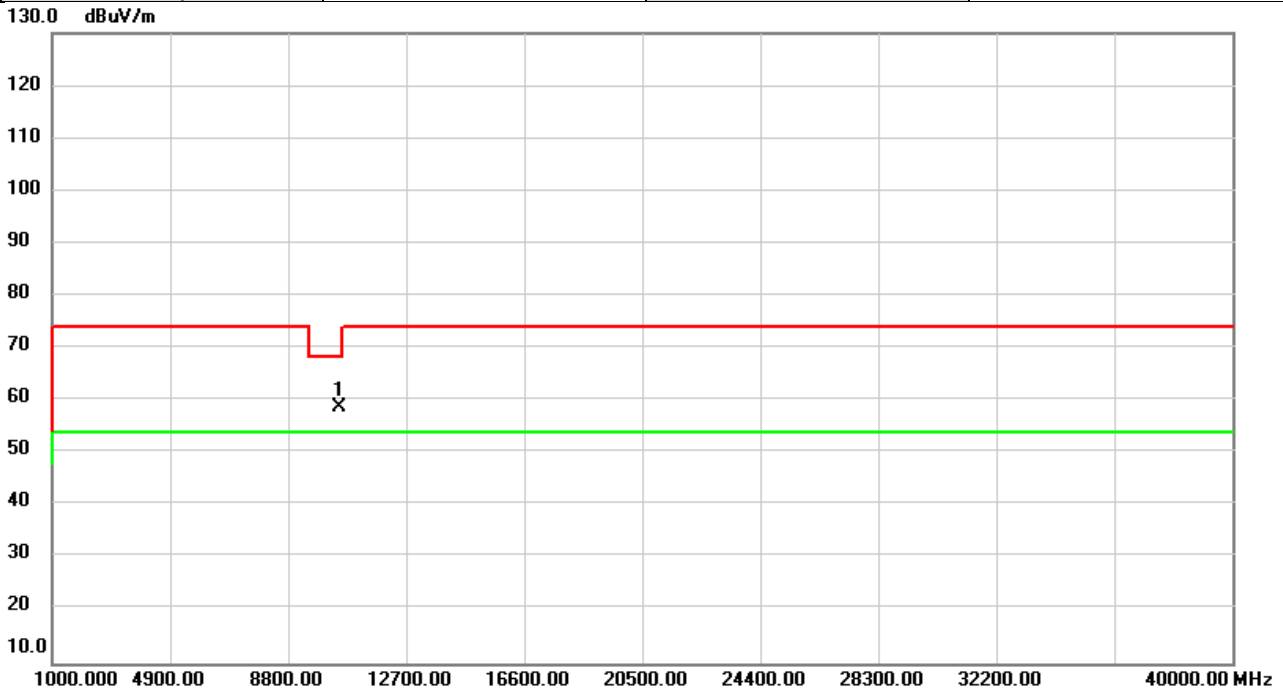


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	53.83	4.96	58.79	68.20	-9.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5260	Polarization	Vertical
Temp	20°C	Hum.	53%

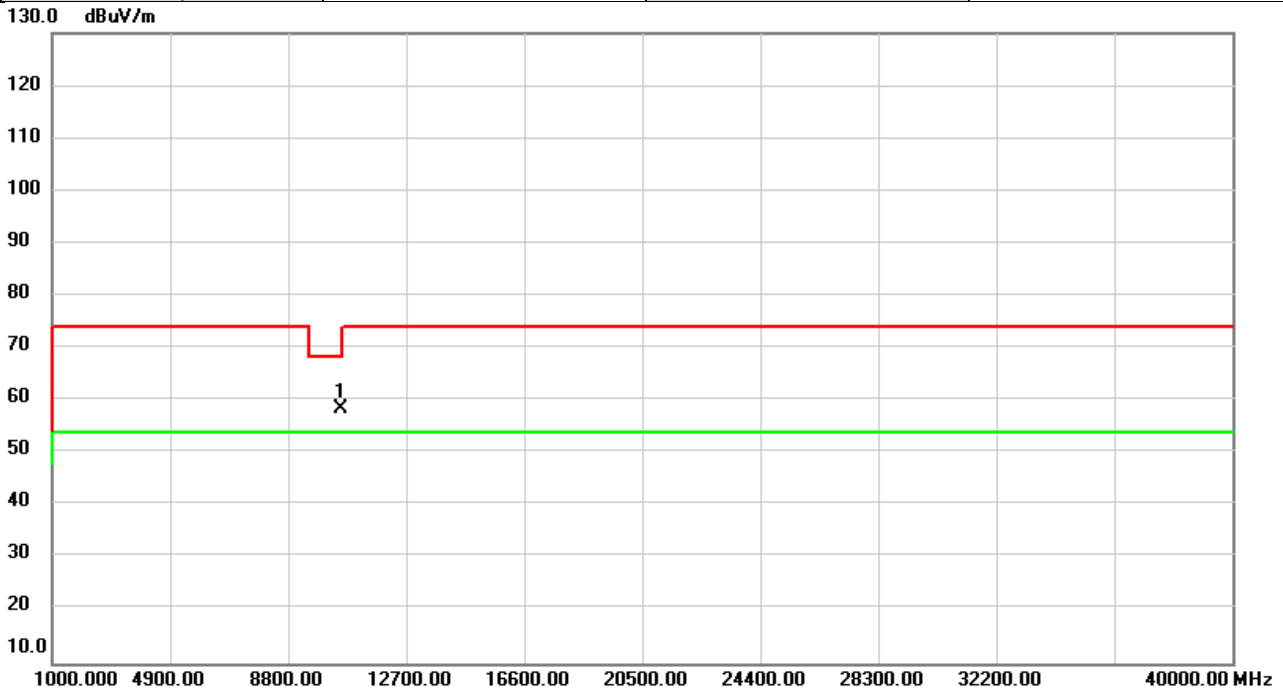


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	53.52	5.06	58.58	68.20	-9.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5260	Polarization	Horizontal
Temp	20°C	Hum.	53%

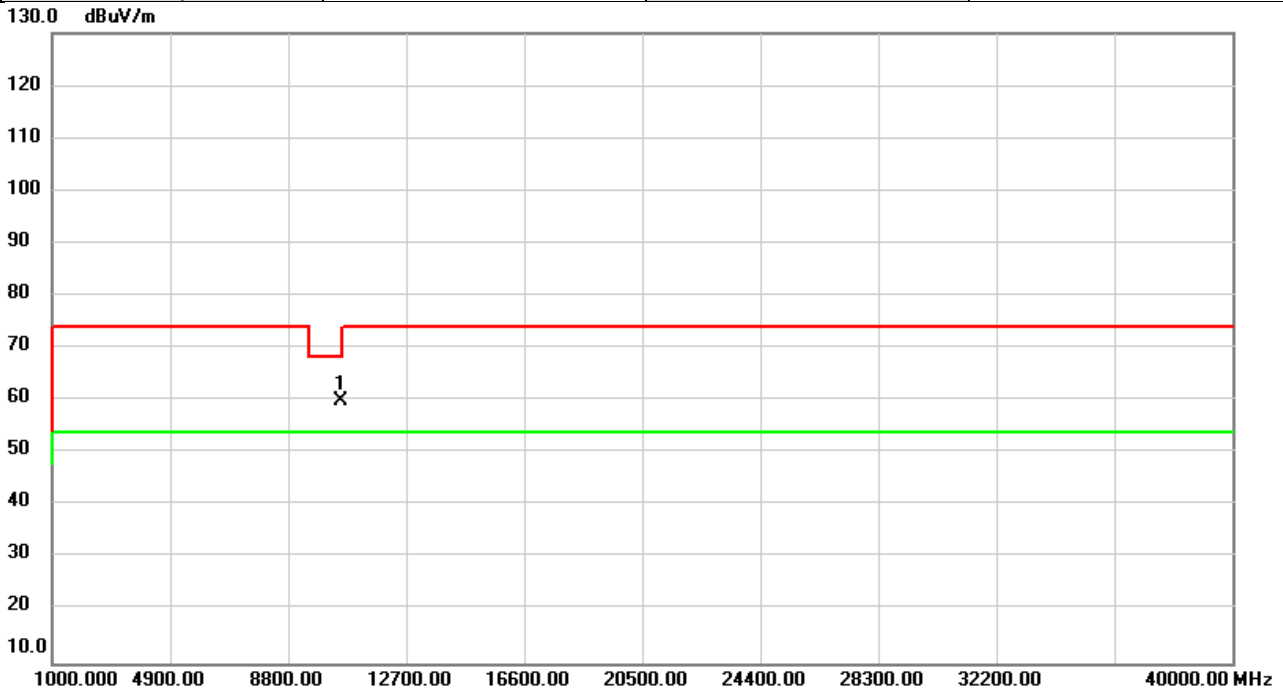


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	54.79	5.06	59.85	68.20	-8.35	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5300	Polarization	Vertical
Temp	20°C	Hum.	53%

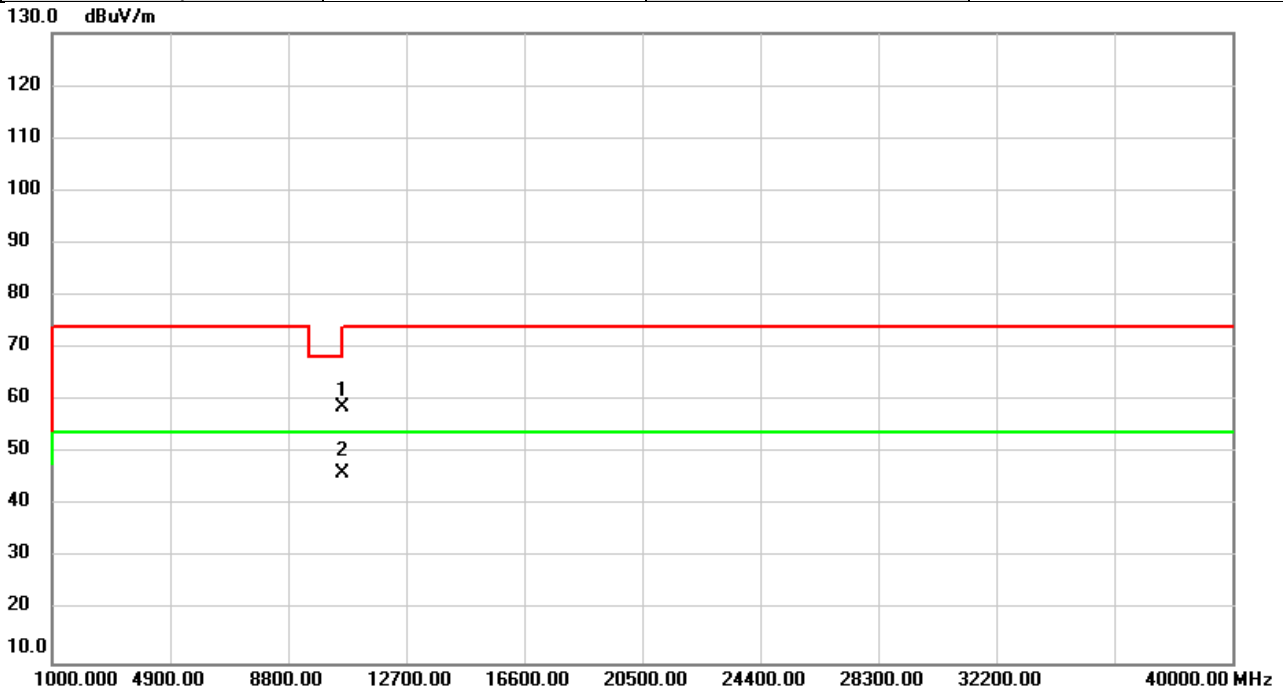


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10600.00	53.33	5.31	58.64	68.20	-9.56	peak	
2	*	10600.00	40.78	5.31	46.09	54.00	-7.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5300	Polarization	Horizontal
Temp	20°C	Hum.	53%

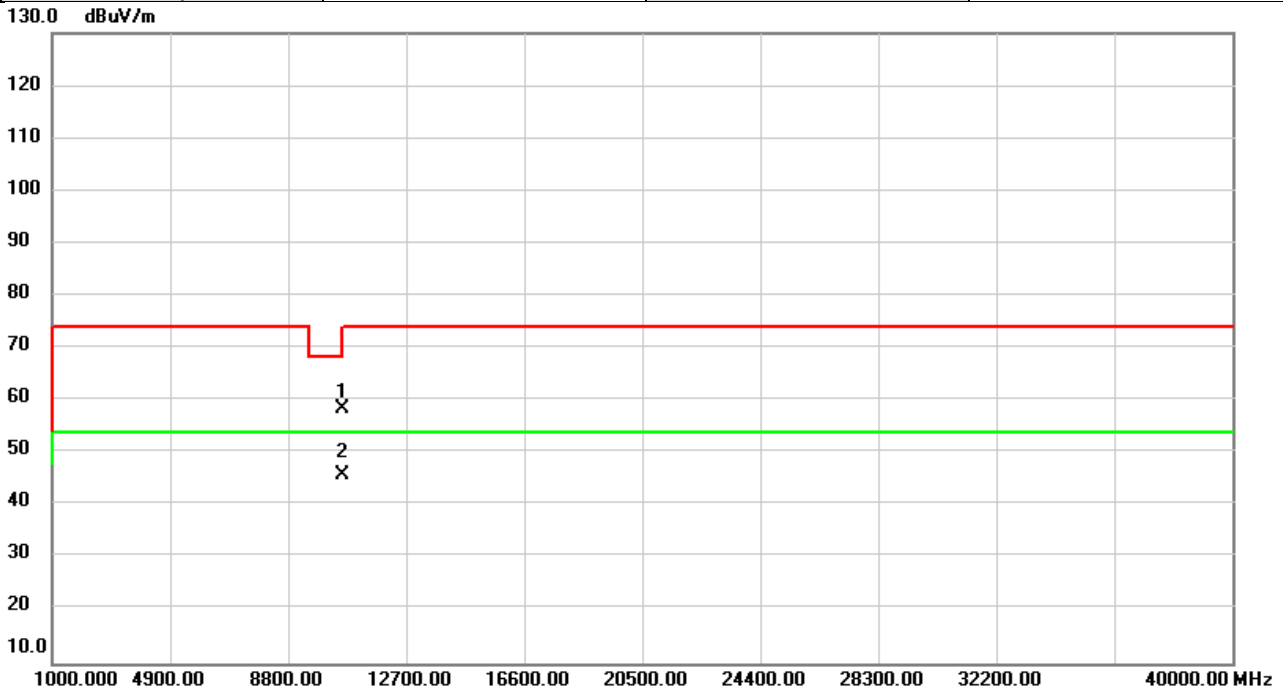


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10600.00	53.22	5.31	58.53	68.20	-9.67	peak	
2	*	10600.00	40.64	5.31	45.95	54.00	-8.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5320	Polarization	Vertical
Temp	20°C	Hum.	53%

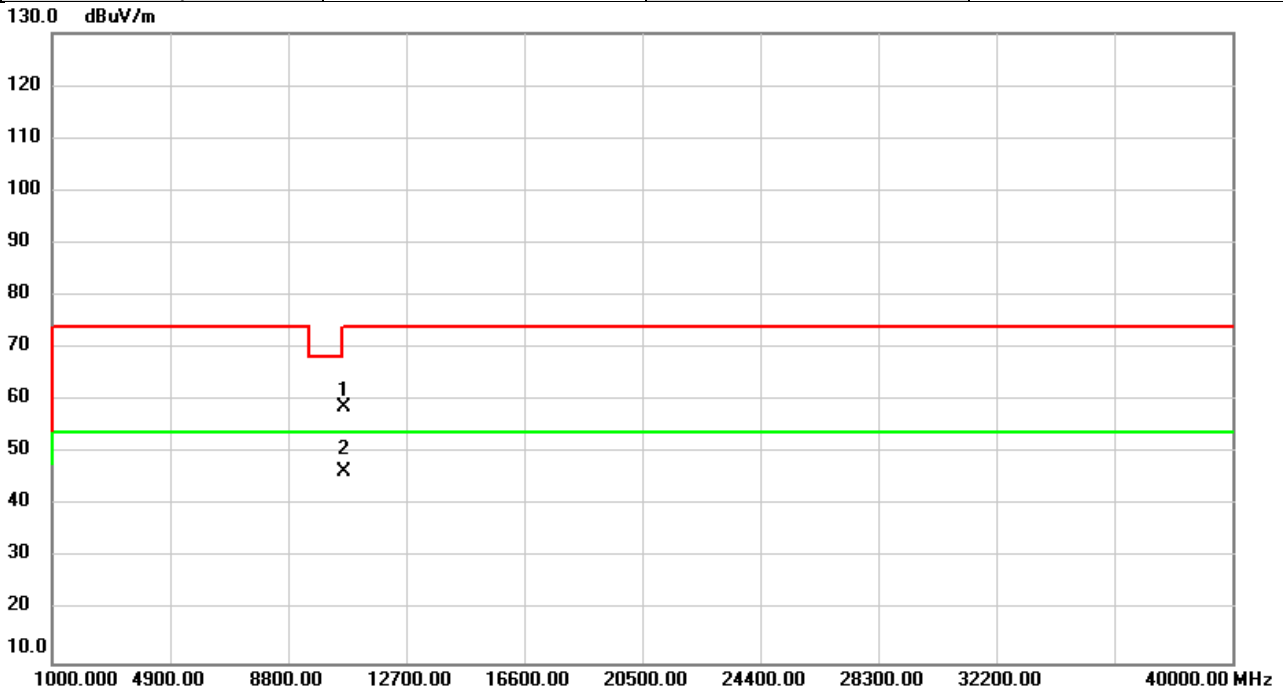


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	53.44	5.43	58.87	74.00	-15.13	peak	
2	*	10640.00	41.01	5.43	46.44	54.00	-7.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5320	Polarization	Horizontal
Temp	20°C	Hum.	53%

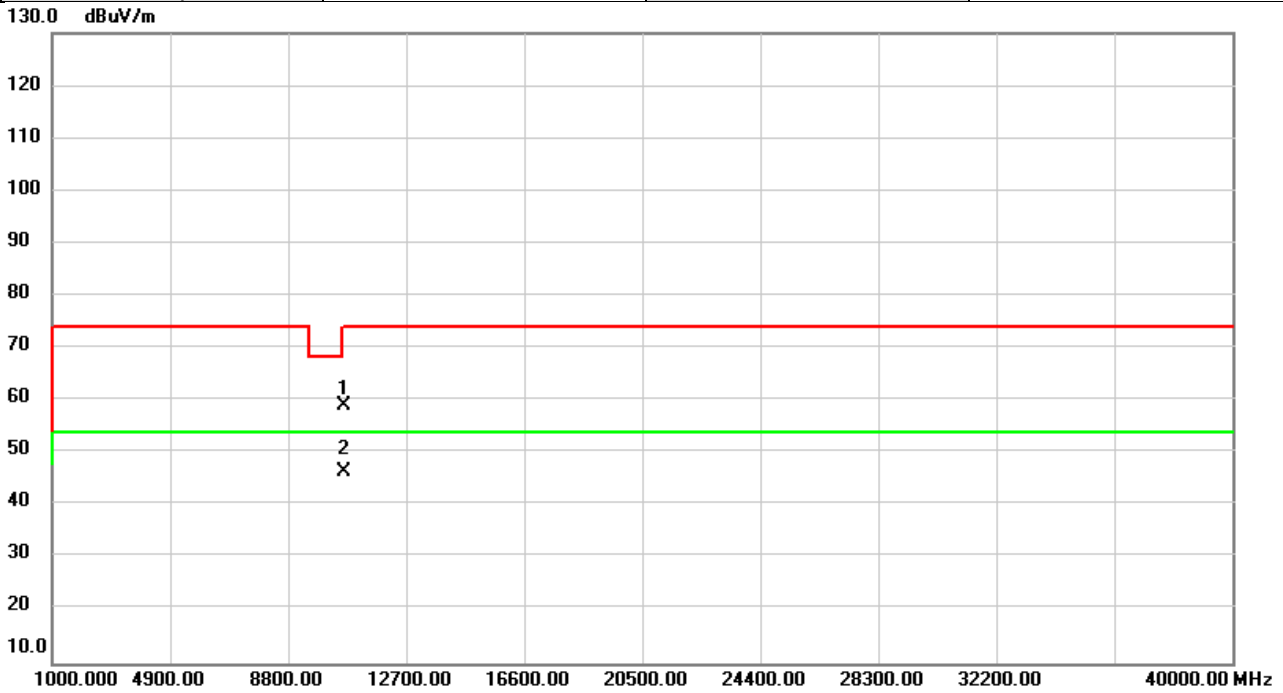


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	53.50	5.43	58.93	74.00	-15.07	peak	
2	*	10640.00	40.96	5.43	46.39	54.00	-7.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5500	Polarization	Vertical
Temp	20°C	Hum.	53%

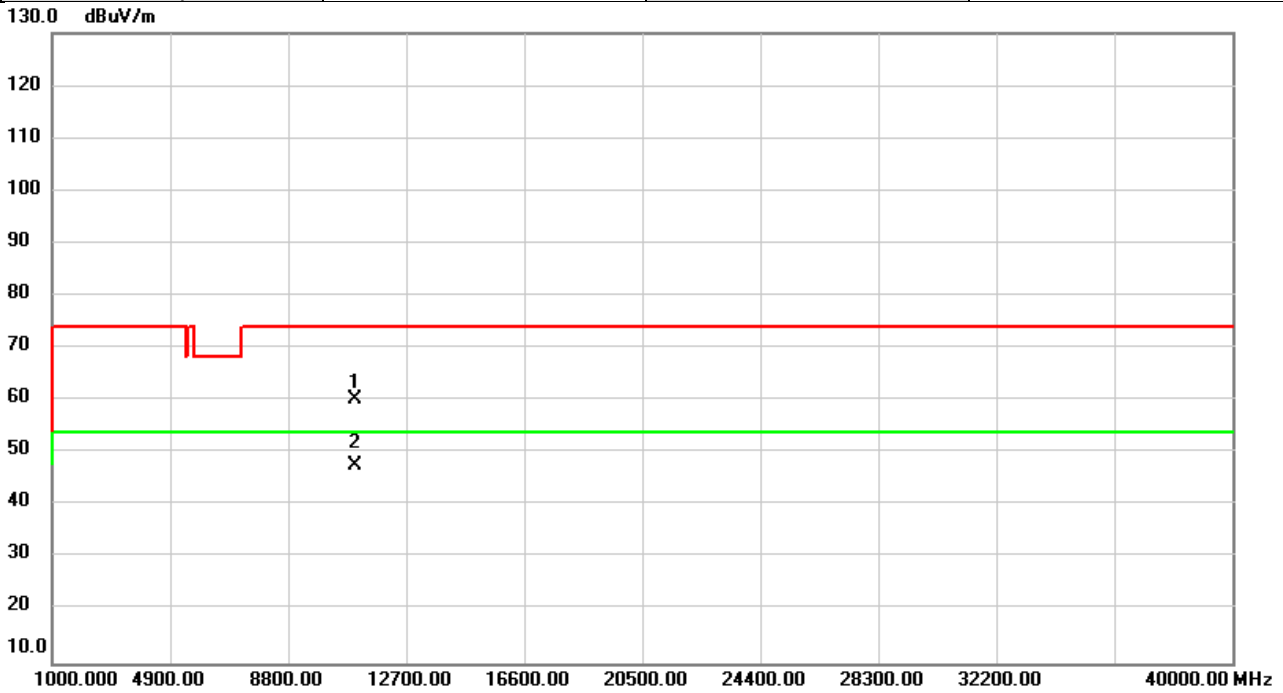


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11000.00	53.69	6.54	60.23	74.00	-13.77	peak	
2	*	11000.00	41.18	6.54	47.72	54.00	-6.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5500	Polarization	Horizontal
Temp	20°C	Hum.	53%

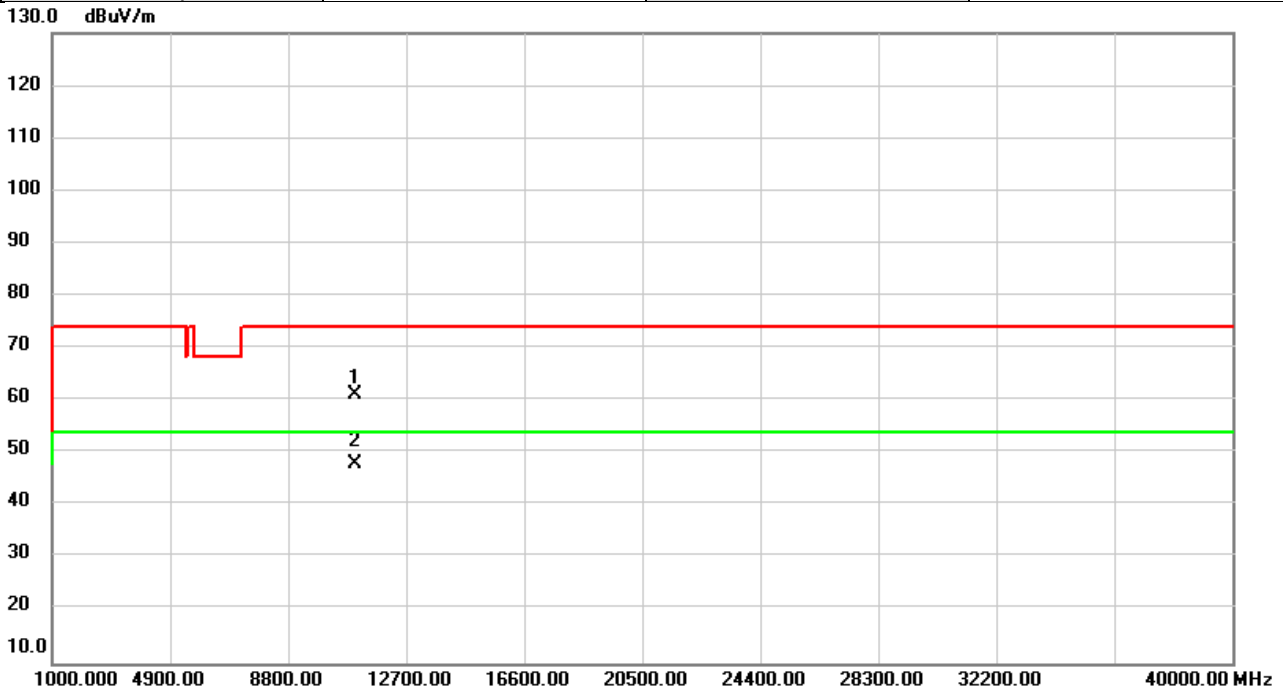


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11000.00	54.76	6.54	61.30	74.00	-12.70	peak	
2	*	11000.00	41.34	6.54	47.88	54.00	-6.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5580	Polarization	Vertical
Temp	20°C	Hum.	53%

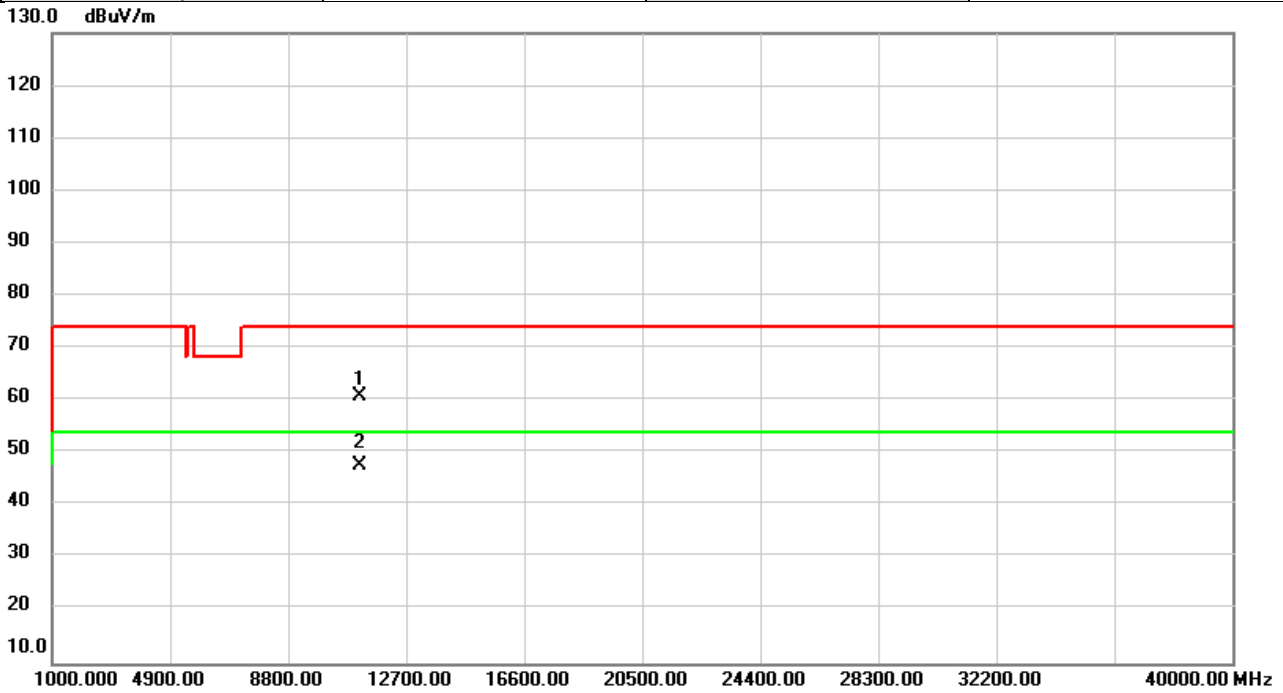


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11160.00	54.68	6.05	60.73	74.00	-13.27	peak	
2	*	11160.00	41.50	6.05	47.55	54.00	-6.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5580	Polarization	Horizontal
Temp	20°C	Hum.	53%

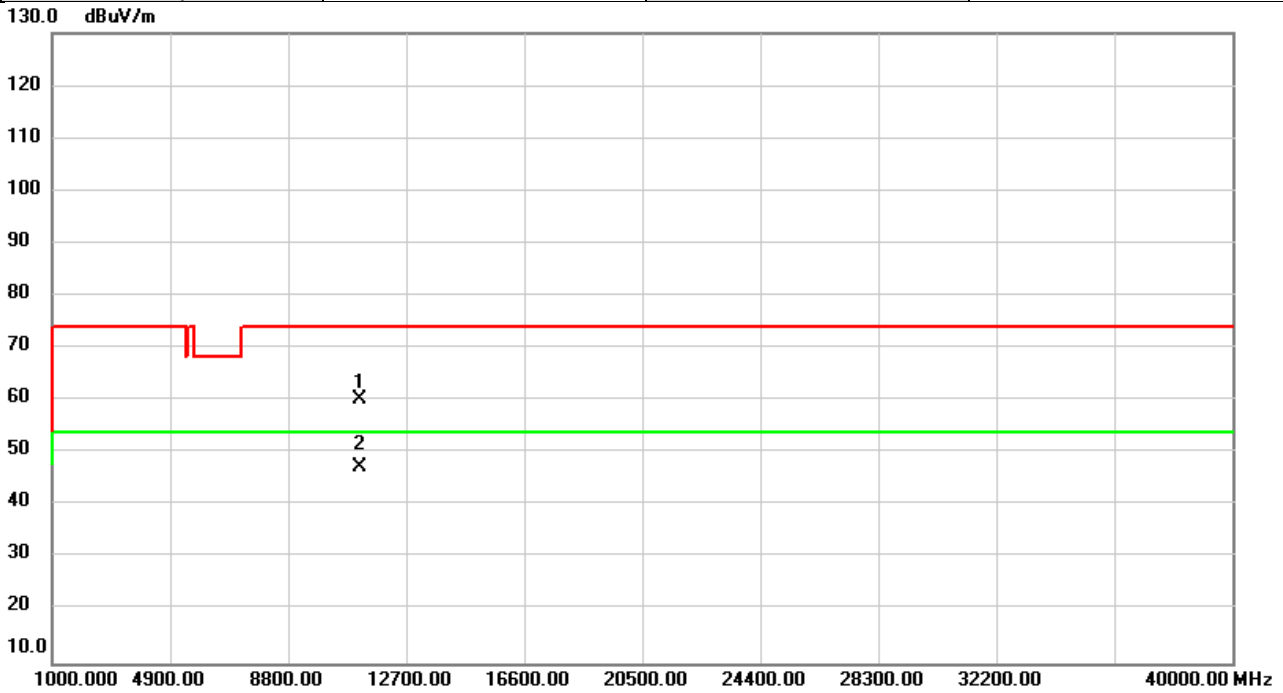


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11160.00	54.32	6.05	60.37	74.00	-13.63	peak	
2	*	11160.00	41.18	6.05	47.23	54.00	-6.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5700	Polarization	Vertical
Temp	20°C	Hum.	53%

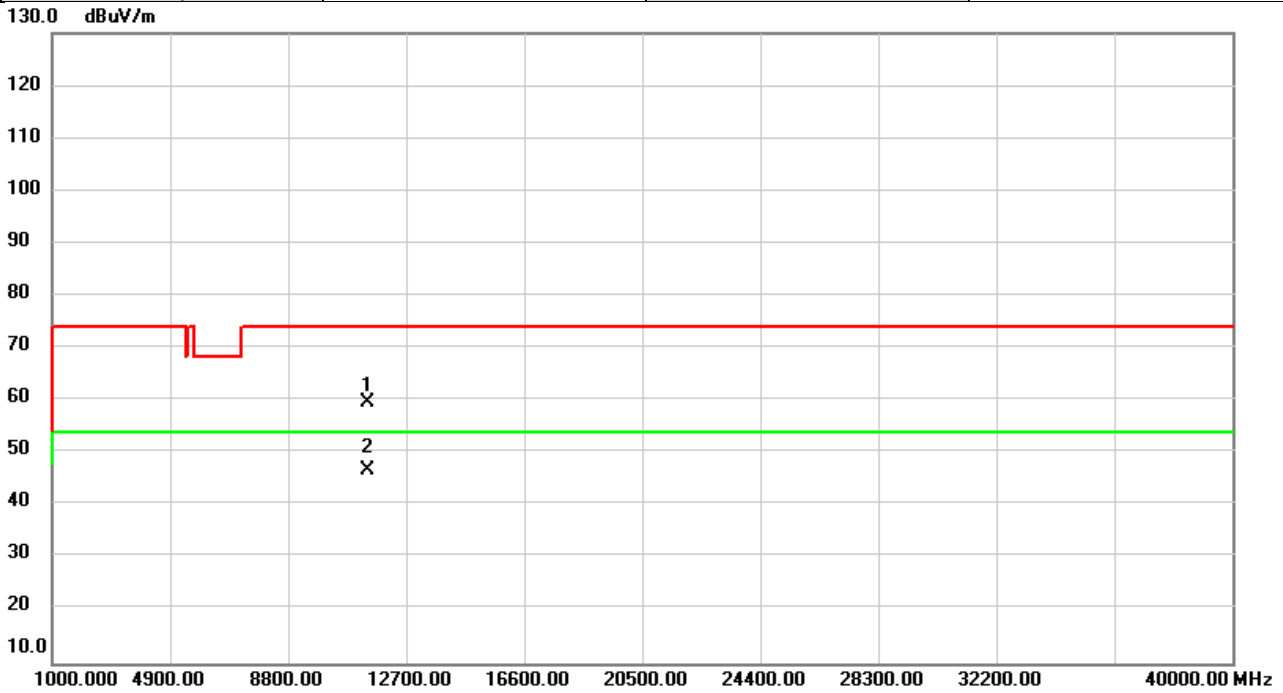


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11400.00	54.43	5.33	59.76	74.00	-14.24	peak	
2	*	11400.00	41.56	5.33	46.89	54.00	-7.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5700	Polarization	Horizontal
Temp	20°C	Hum.	53%

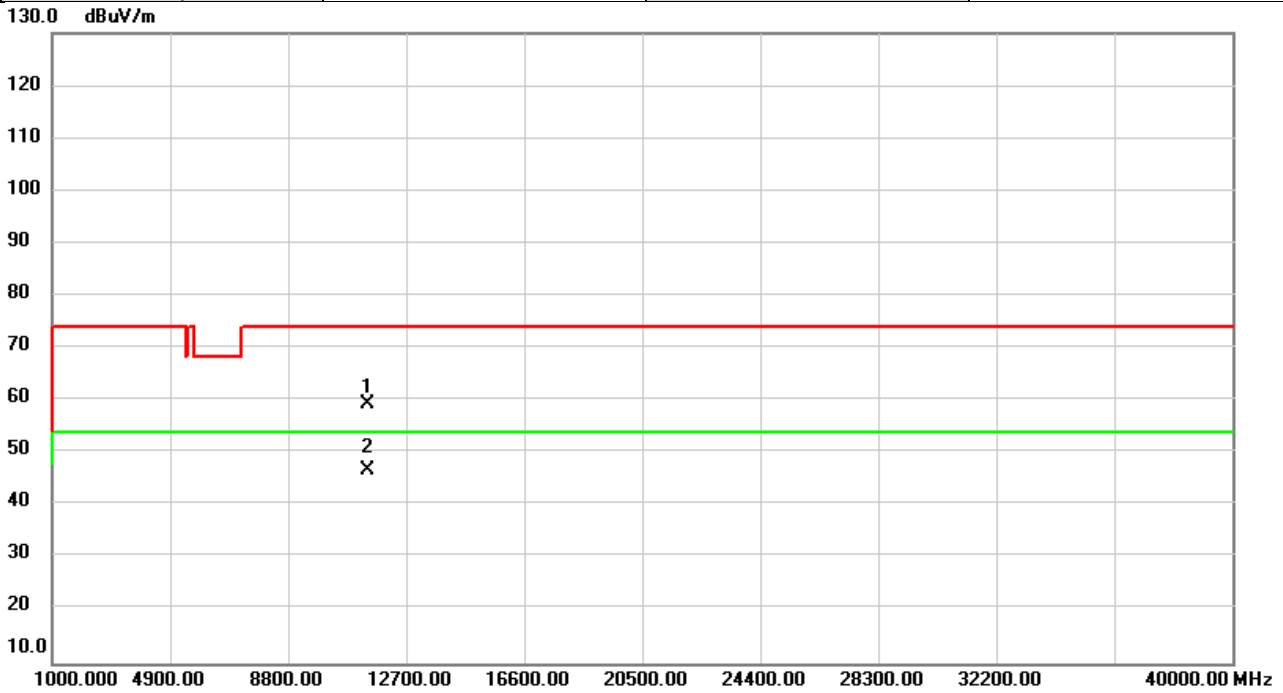


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11400.00	54.16	5.33	59.49	74.00	-14.51	peak	
2	*	11400.00	41.57	5.33	46.90	54.00	-7.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5745	Polarization	Vertical
Temp	20°C	Hum.	53%

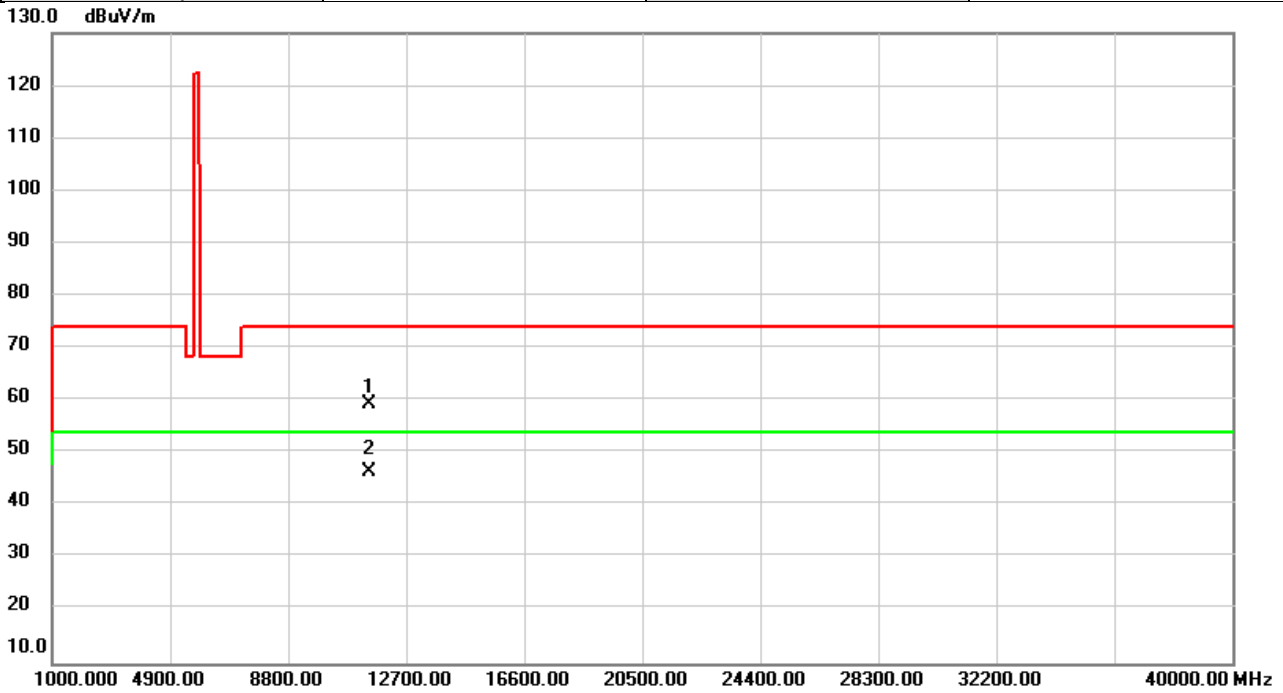


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11490.00	54.24	5.06	59.30	74.00	-14.70	peak	
2	*	11490.00	41.32	5.06	46.38	54.00	-7.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5745	Polarization	Horizontal
Temp	20°C	Hum.	53%

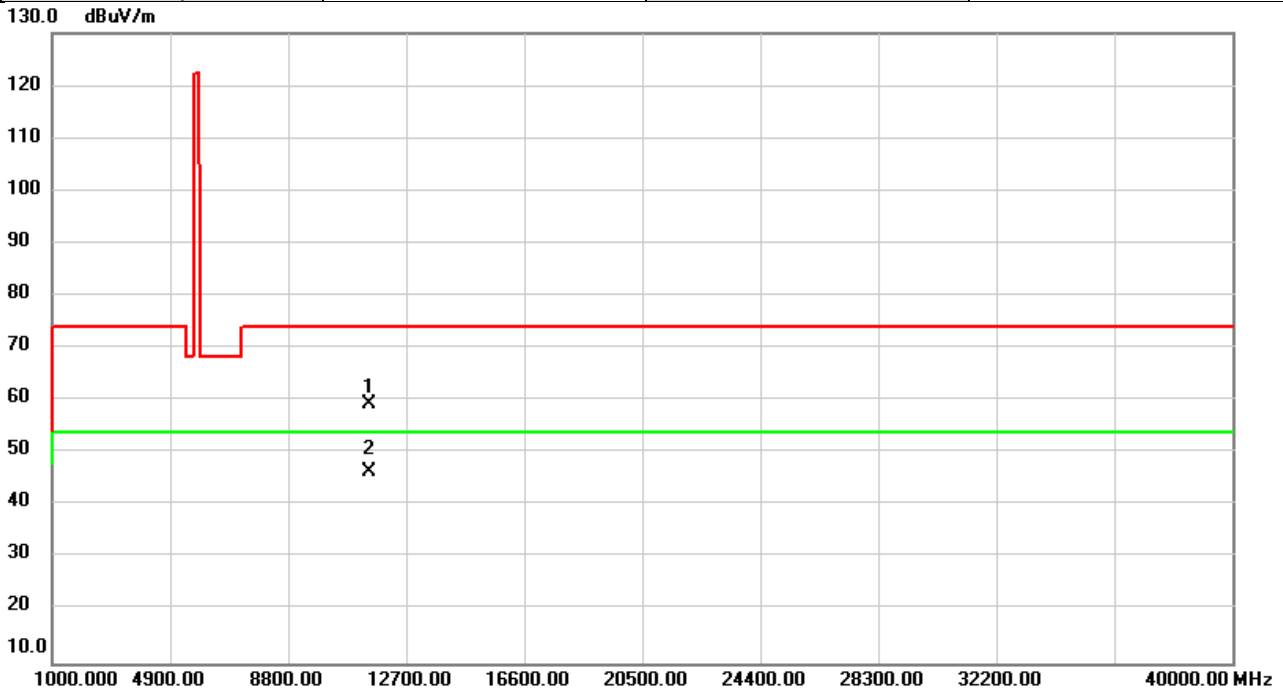


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11490.00	54.39	5.06	59.45	74.00	-14.55	peak	
2	*	11490.00	41.27	5.06	46.33	54.00	-7.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5785	Polarization	Vertical
Temp	20°C	Hum.	53%

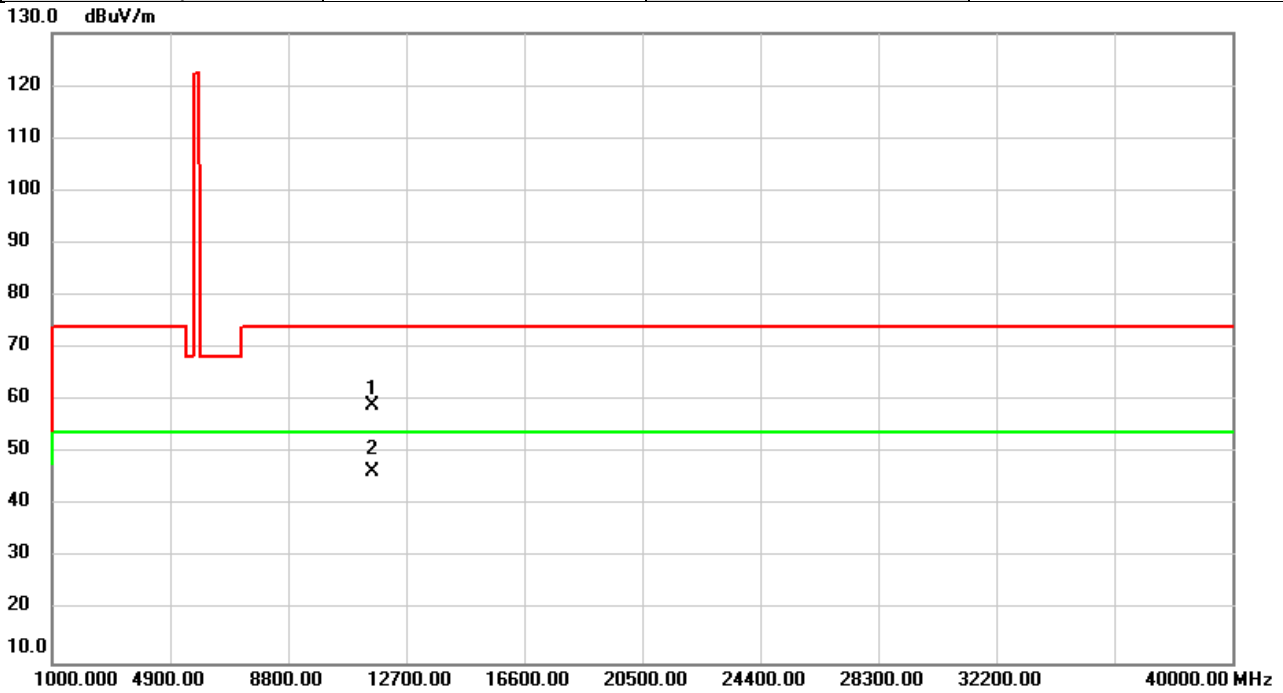


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.00	54.16	4.87	59.03	74.00	-14.97	peak	
2	*	11570.00	41.48	4.87	46.35	54.00	-7.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5785	Polarization	Horizontal
Temp	20°C	Hum.	53%

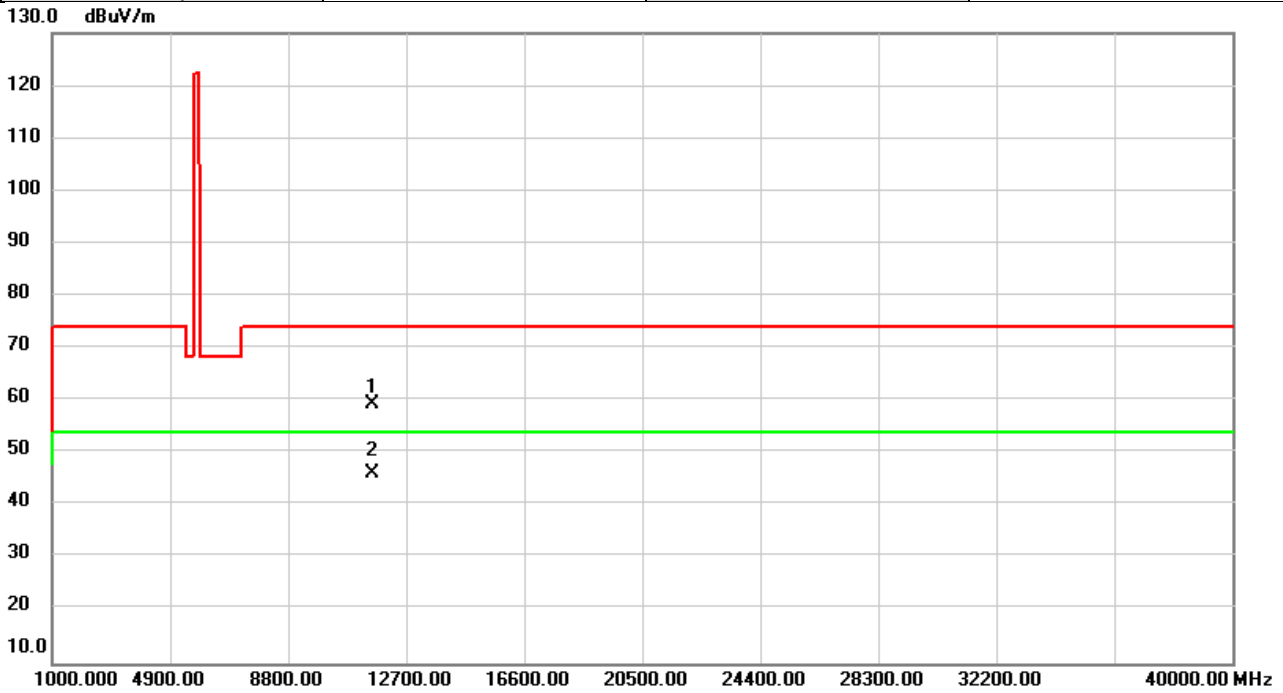


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.00	54.33	4.87	59.20	74.00	-14.80	peak	
2	*	11570.00	41.43	4.87	46.30	54.00	-7.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5825	Polarization	Vertical
Temp	20°C	Hum.	53%

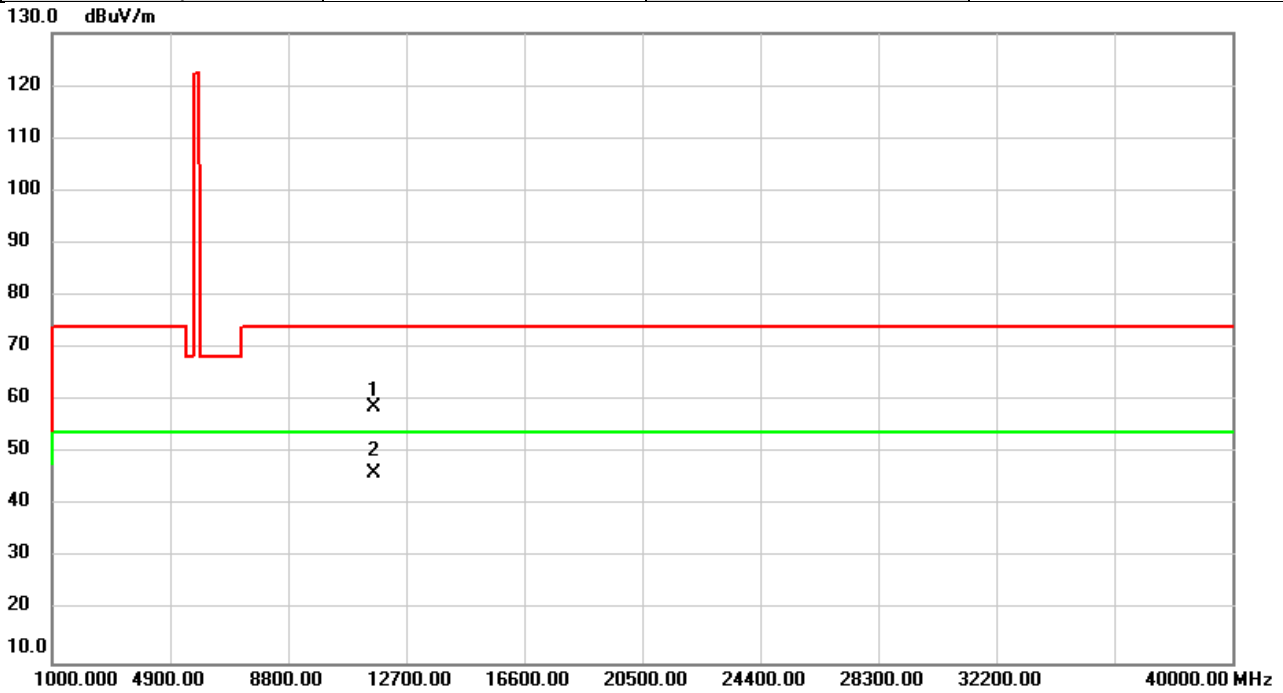


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11650.00	53.96	4.69	58.65	74.00	-15.35	peak	
2	*	11650.00	41.41	4.69	46.10	54.00	-7.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/6/25
Test Frequency	5825	Polarization	Horizontal
Temp	20°C	Hum.	53%

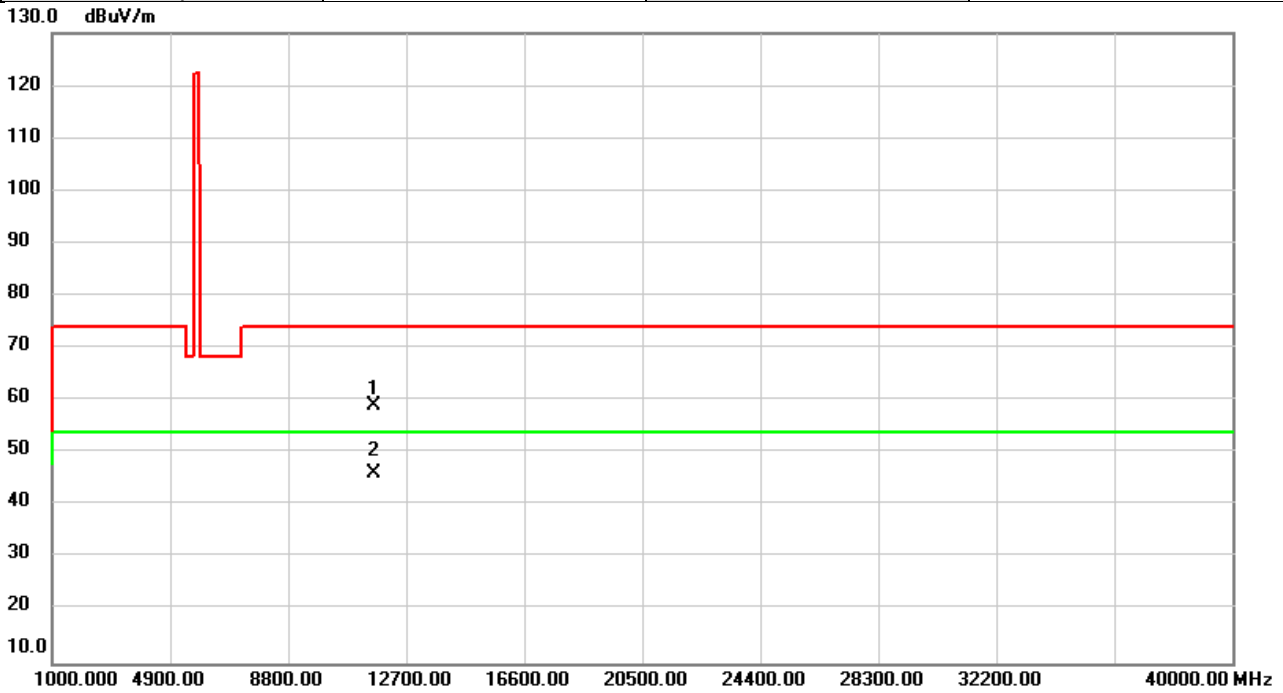


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11650.00	54.30	4.69	58.99	74.00	-15.01	peak	
2	*	11650.00	41.54	4.69	46.23	54.00	-7.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/25
Test Frequency	5190	Polarization	Vertical
Temp	20°C	Hum.	53%

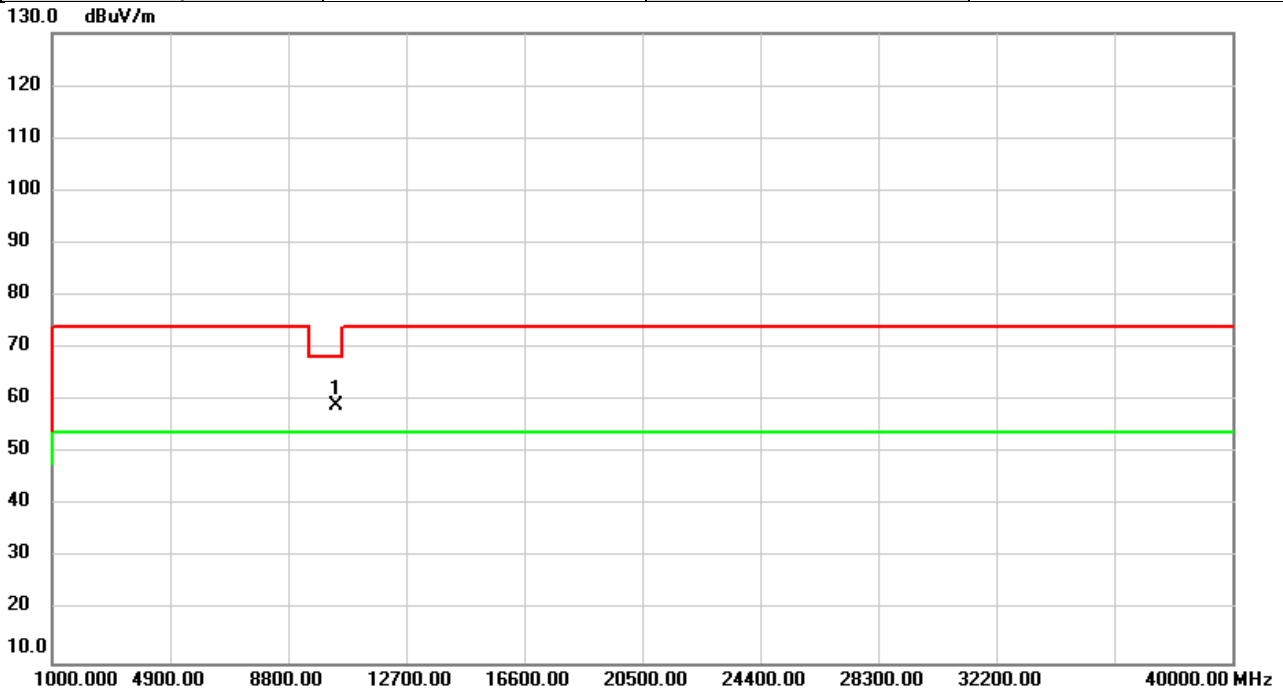


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	54.26	4.76	59.02	68.20	-9.18	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/25
Test Frequency	5190	Polarization	Horizontal
Temp	20°C	Hum.	53%

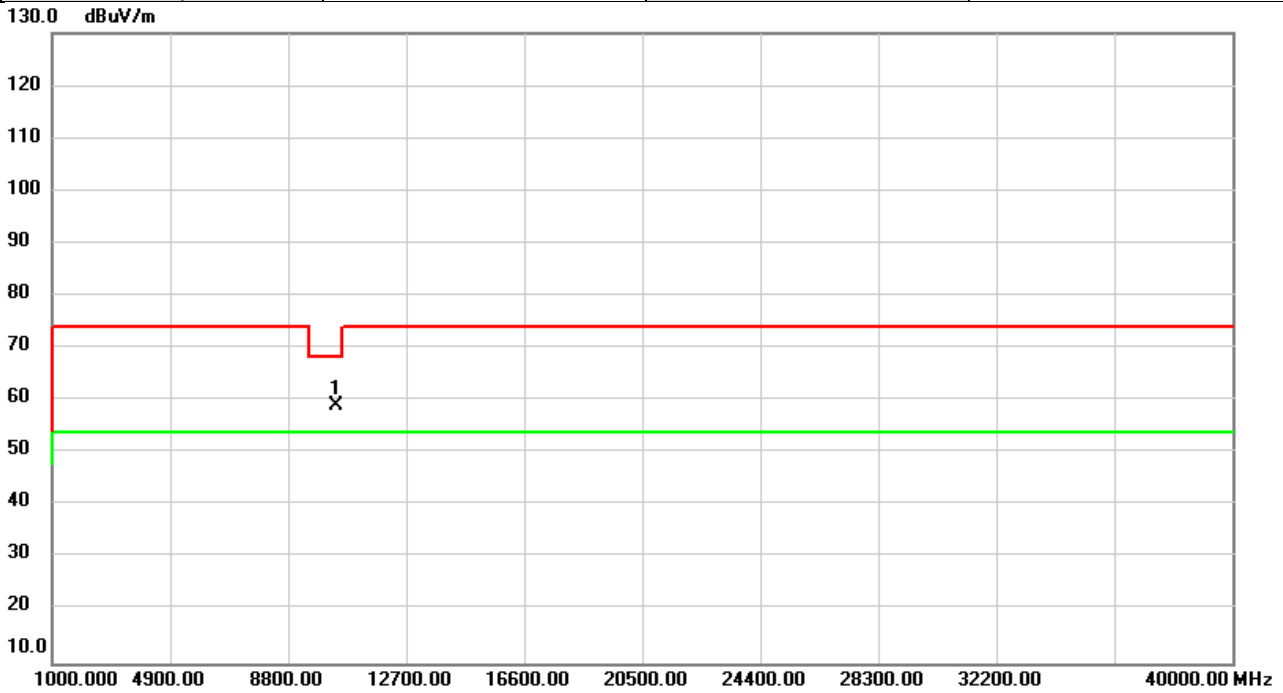


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	54.28	4.76	59.04	68.20	-9.16	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/25
Test Frequency	5230	Polarization	Vertical
Temp	20°C	Hum.	53%

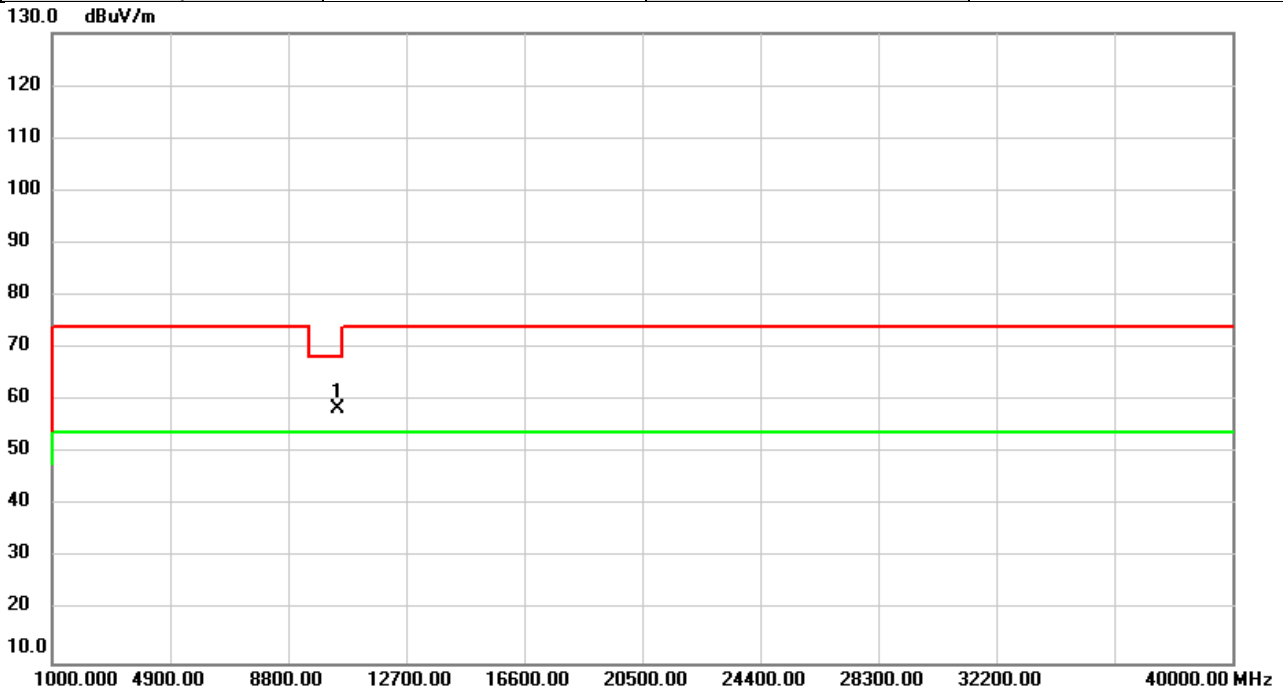


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	53.66	4.92	58.58	68.20	-9.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/25
Test Frequency	5230	Polarization	Horizontal
Temp	20°C	Hum.	53%

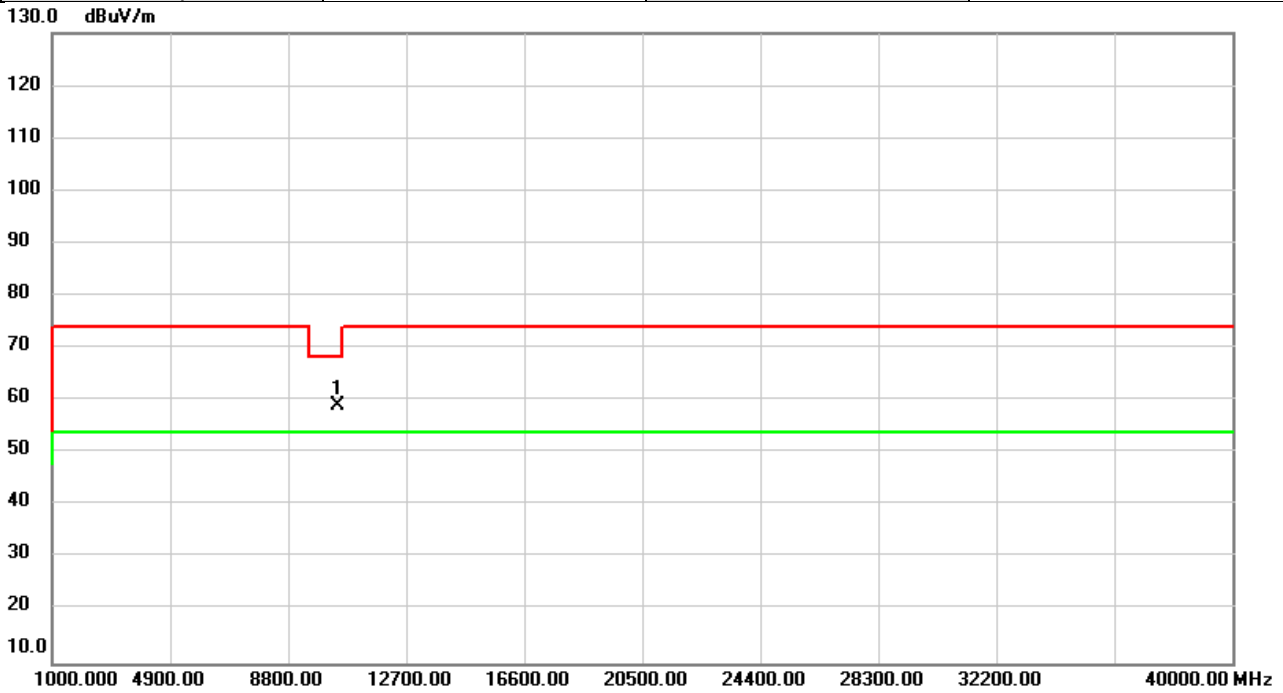


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	54.01	4.92	58.93	68.20	-9.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/25
Test Frequency	5270	Polarization	Vertical
Temp	20°C	Hum.	53%

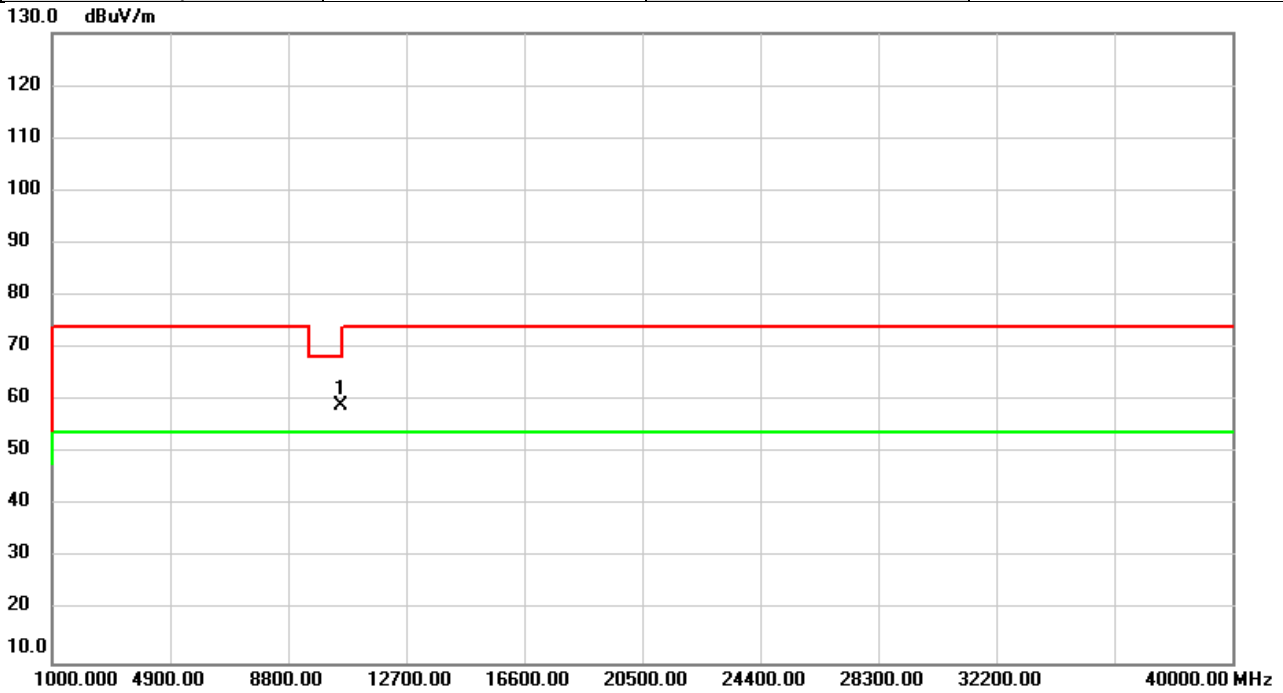


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	53.82	5.12	58.94	68.20	-9.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/25
Test Frequency	5270	Polarization	Horizontal
Temp	20°C	Hum.	53%

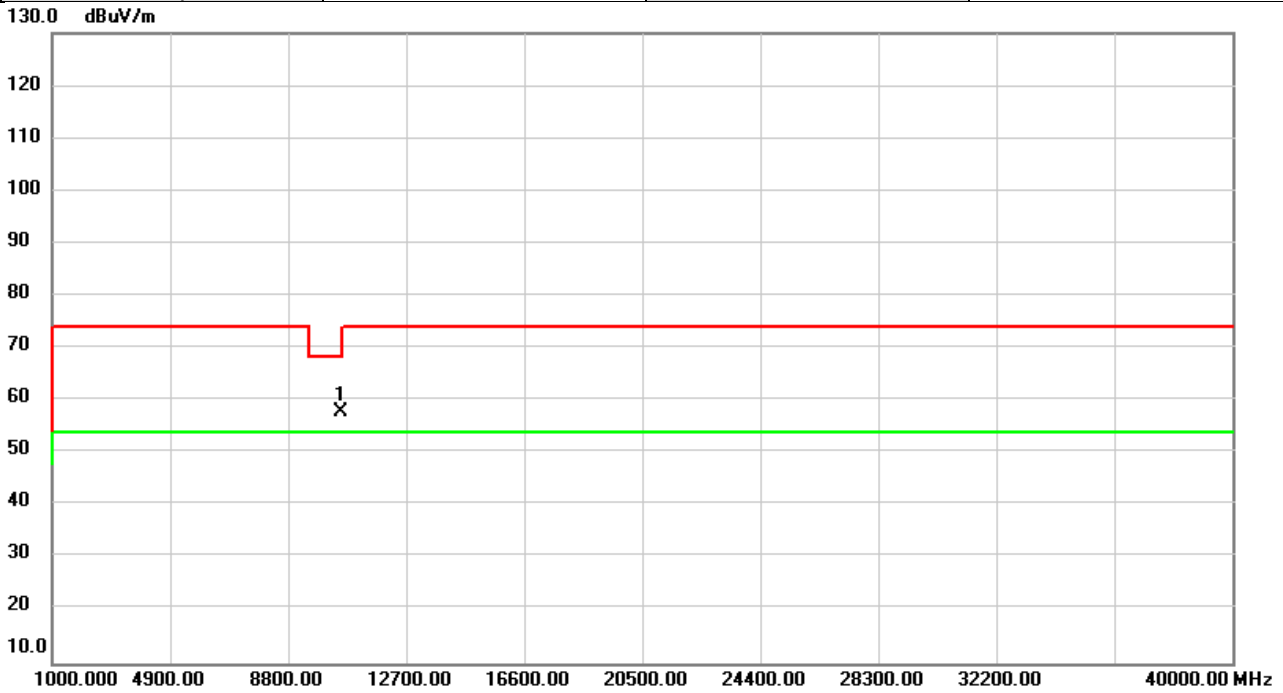


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	52.85	5.12	57.97	68.20	-10.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/25
Test Frequency	5310	Polarization	Vertical
Temp	20°C	Hum.	53%

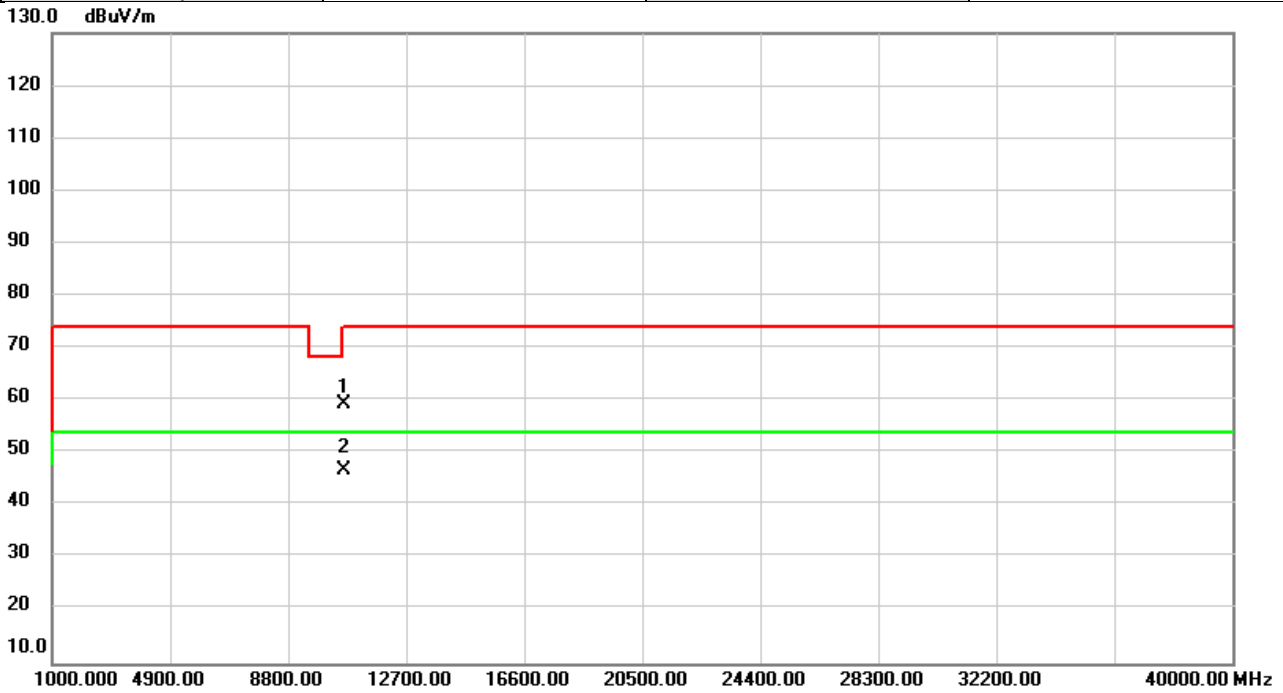


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10620.00	53.96	5.37	59.33	74.00	-14.67	peak	
2	*	10620.00	41.33	5.37	46.70	54.00	-7.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/25
Test Frequency	5310	Polarization	Horizontal
Temp	20°C	Hum.	53%

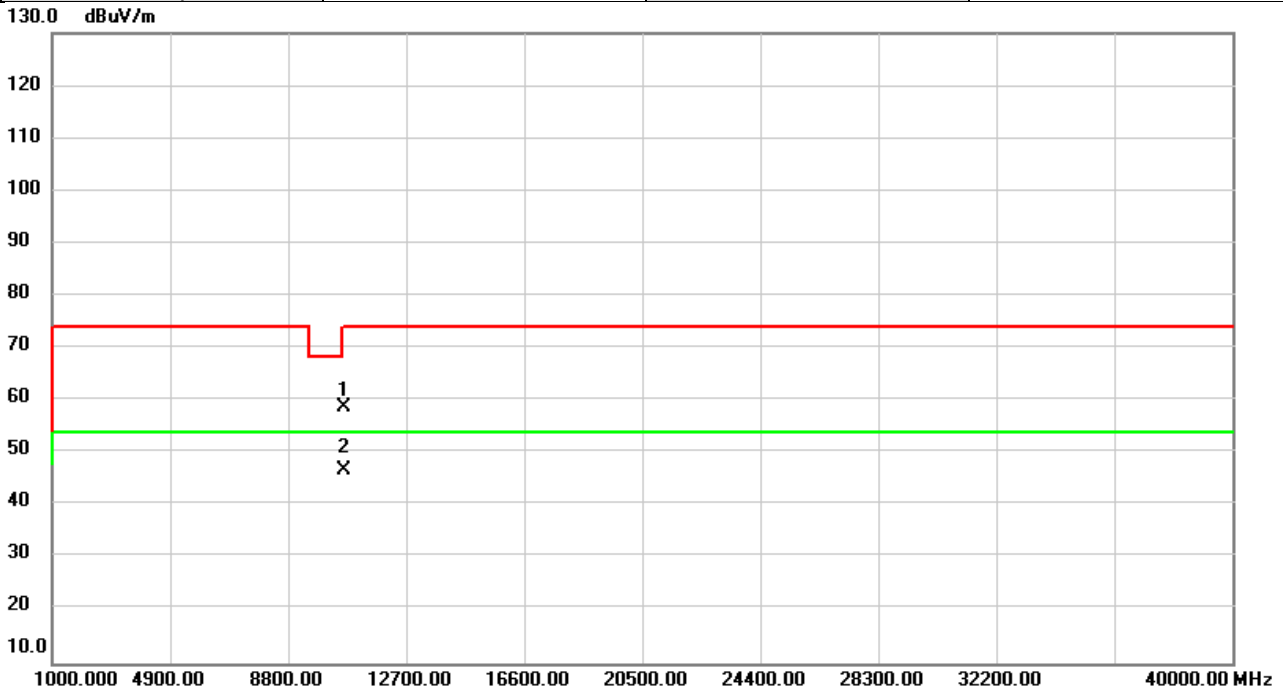


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10620.00	53.25	5.37	58.62	74.00	-15.38	peak	
2	*	10620.00	41.41	5.37	46.78	54.00	-7.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/25
Test Frequency	5510	Polarization	Vertical
Temp	20°C	Hum.	53%

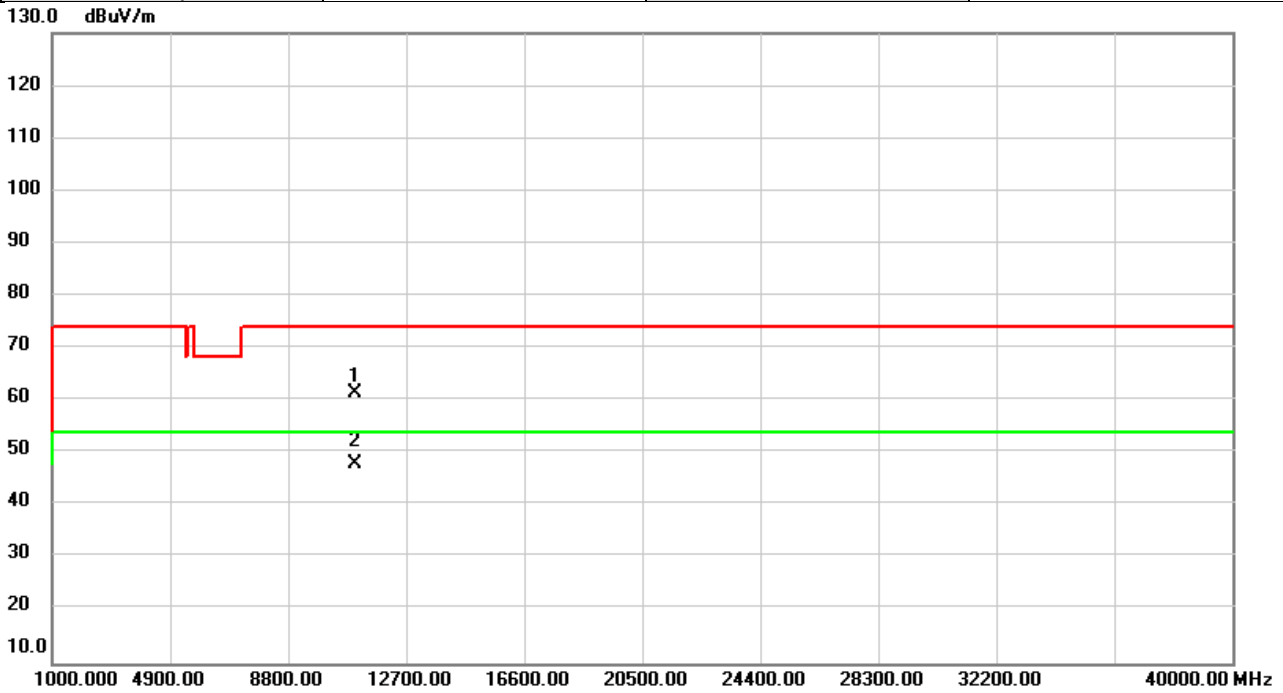


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11020.00	54.97	6.48	61.45	74.00	-12.55	peak	
2	*	11020.00	41.47	6.48	47.95	54.00	-6.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/25
Test Frequency	5510	Polarization	Horizontal
Temp	20°C	Hum.	53%

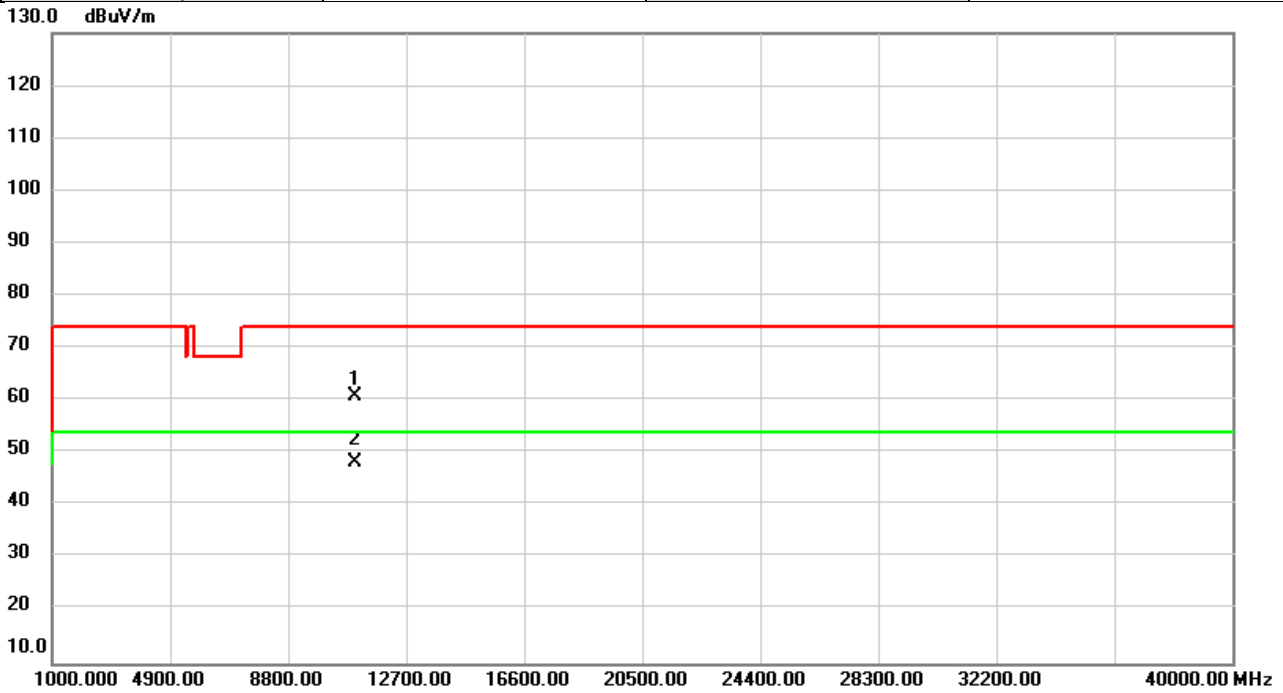


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11020.00	54.47	6.48	60.95	74.00	-13.05	peak	
2	*	11020.00	41.67	6.48	48.15	54.00	-5.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/25
Test Frequency	5550	Polarization	Vertical
Temp	20°C	Hum.	53%

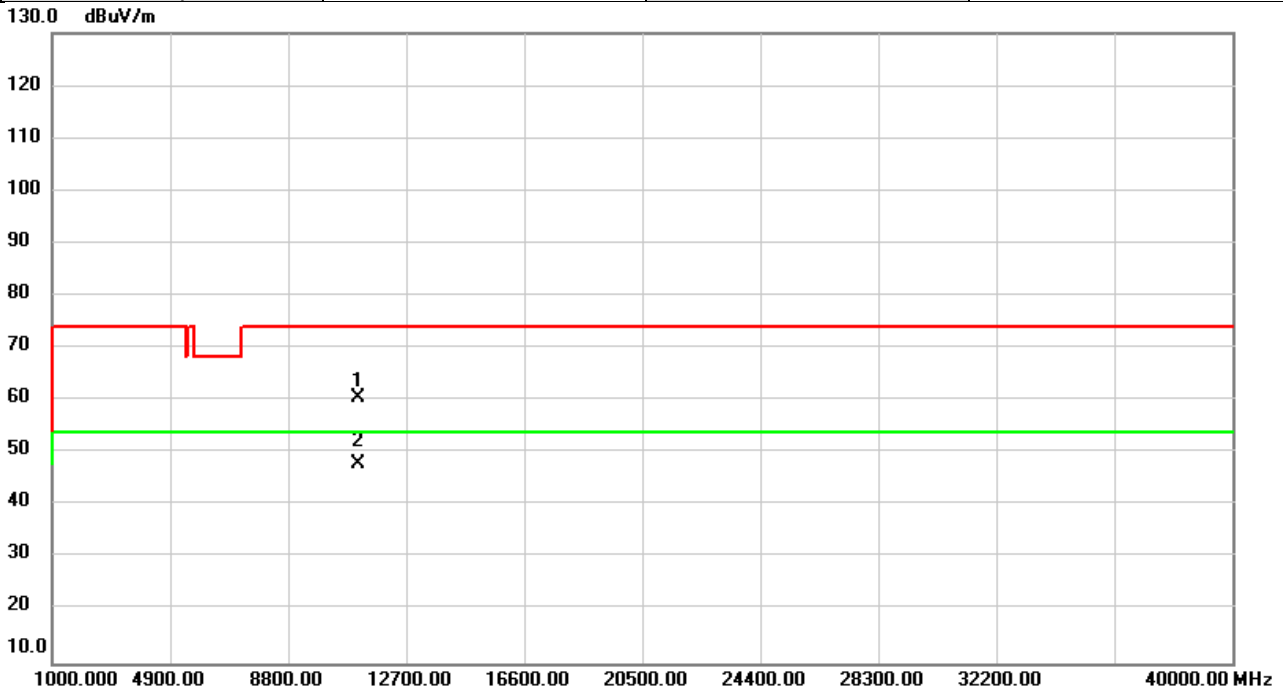


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11100.00	54.37	6.24	60.61	74.00	-13.39	peak	
2	*	11100.00	41.58	6.24	47.82	54.00	-6.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/25
Test Frequency	5550	Polarization	Horizontal
Temp	20°C	Hum.	53%

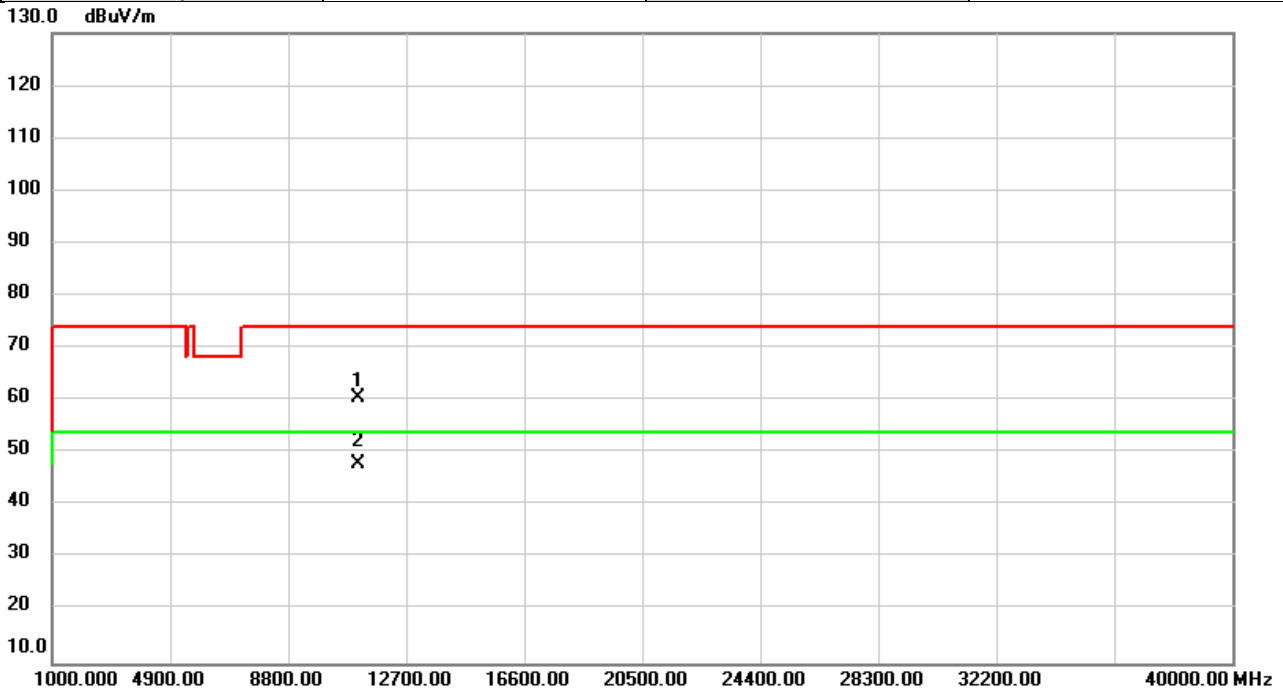


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11100.00	54.34	6.24	60.58	74.00	-13.42	peak	
2	*	11100.00	41.72	6.24	47.96	54.00	-6.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/25
Test Frequency	5670	Polarization	Vertical
Temp	20°C	Hum.	53%

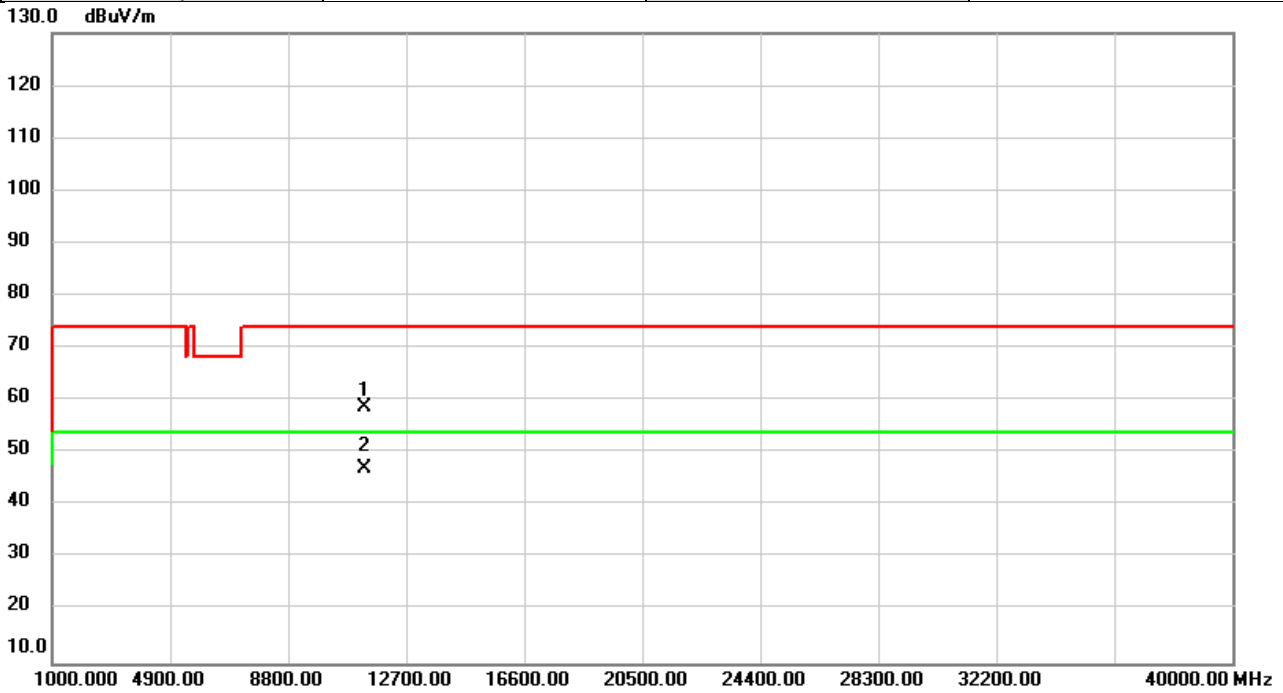


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11340.00	53.32	5.52	58.84	74.00	-15.16	peak	
2	*	11340.00	41.63	5.52	47.15	54.00	-6.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/25
Test Frequency	5670	Polarization	Horizontal
Temp	20°C	Hum.	53%

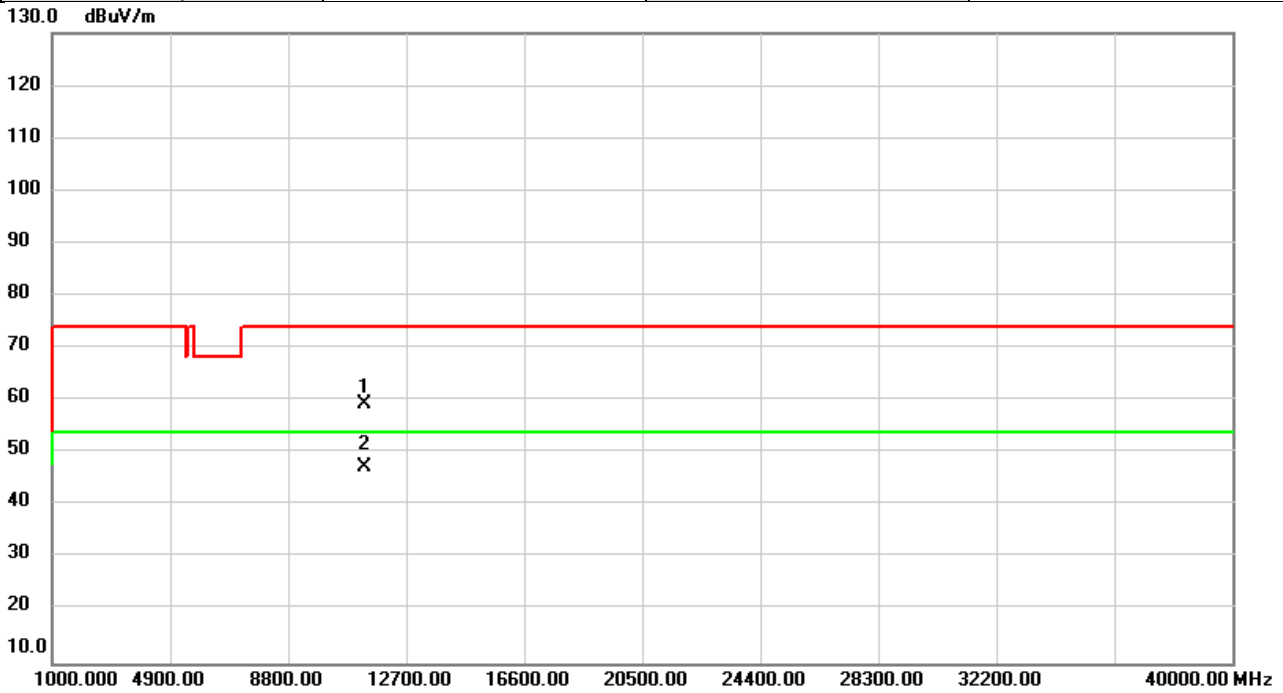


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11340.00	53.69	5.52	59.21	74.00	-14.79	peak	
2	*	11340.00	41.75	5.52	47.27	54.00	-6.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/25
Test Frequency	5755	Polarization	Vertical
Temp	20°C	Hum.	53%

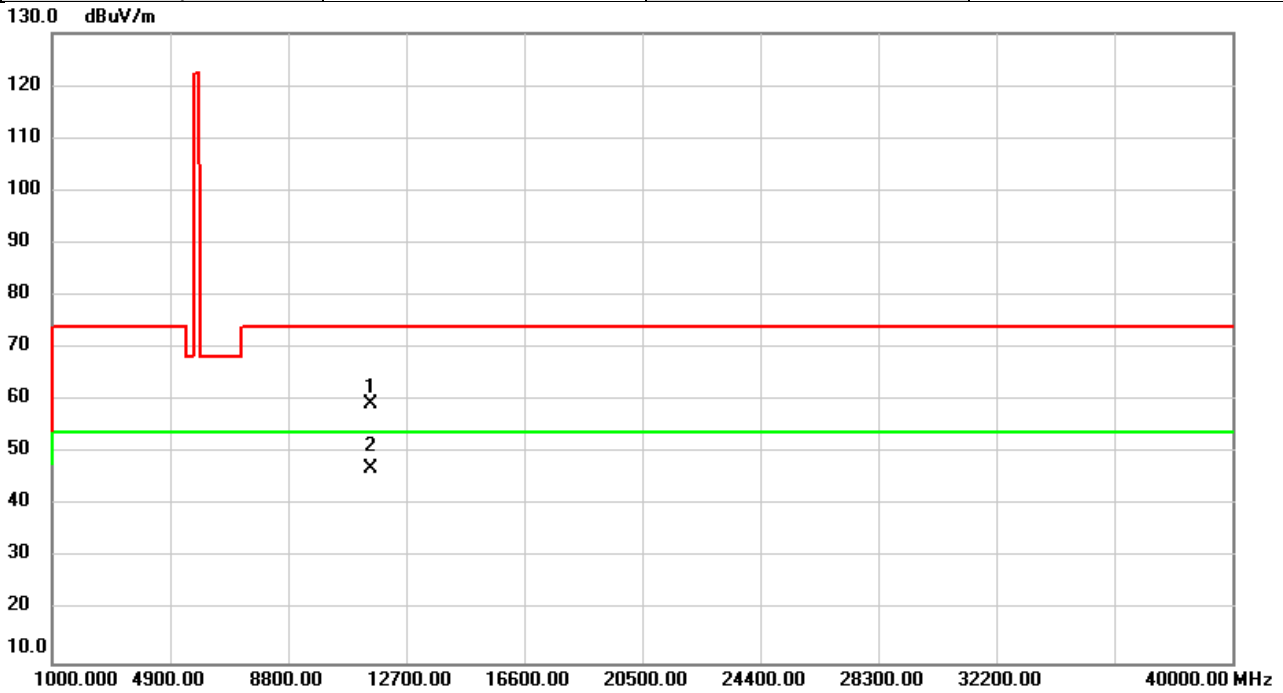


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11510.00	54.20	5.01	59.21	74.00	-14.79	peak	
2	*	11510.00	41.95	5.01	46.96	54.00	-7.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/25
Test Frequency	5755	Polarization	Horizontal
Temp	20°C	Hum.	53%

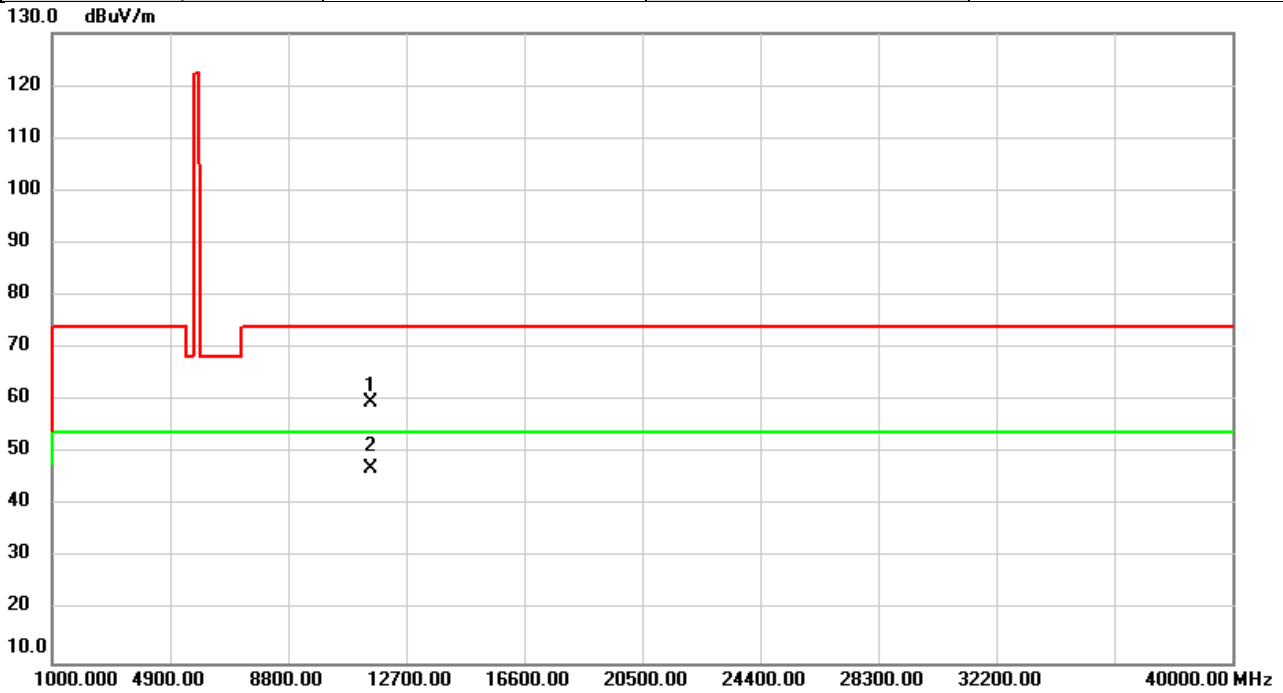


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11510.00	54.76	5.01	59.77	74.00	-14.23	peak	
2	*	11510.00	42.09	5.01	47.10	54.00	-6.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/25
Test Frequency	5795	Polarization	Vertical
Temp	20°C	Hum.	53%

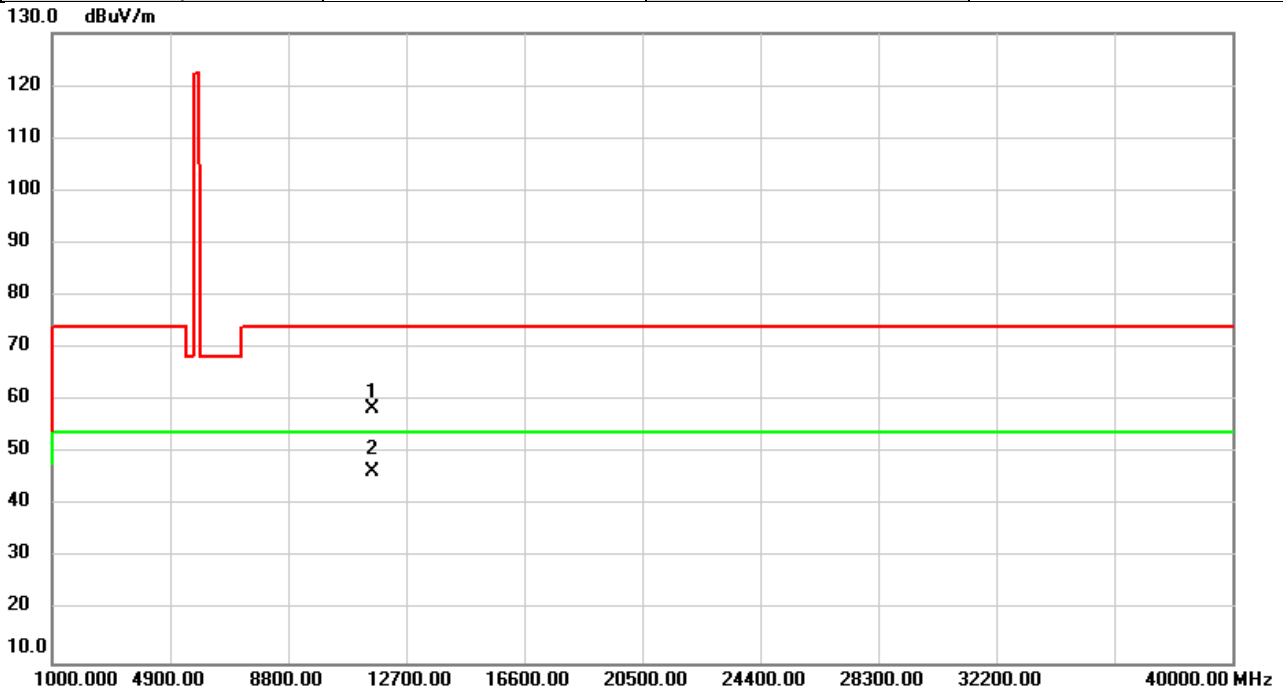


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11590.00	53.65	4.83	58.48	74.00	-15.52	peak	
2	*	11590.00	41.55	4.83	46.38	54.00	-7.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/6/25
Test Frequency	5795	Polarization	Horizontal
Temp	20°C	Hum.	53%

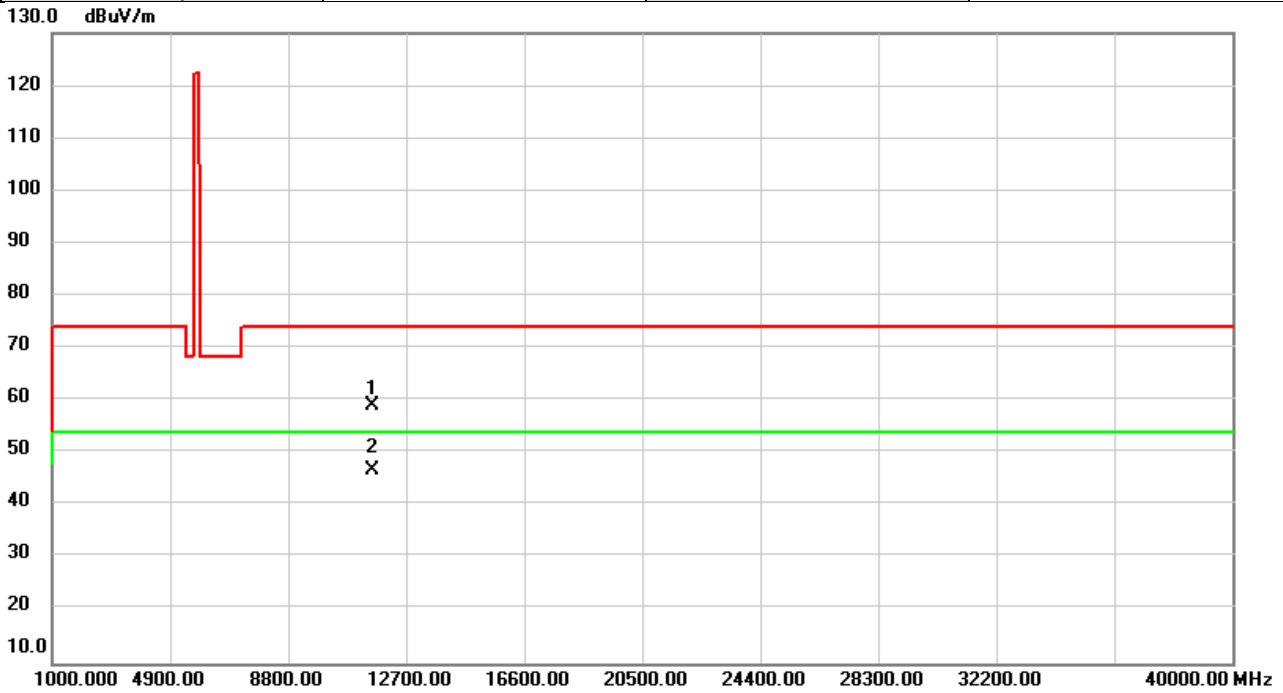


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11590.00	54.08	4.83	58.91	74.00	-15.09	peak	
2	*	11590.00	41.77	4.83	46.60	54.00	-7.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/6/25
Test Frequency	5210	Polarization	Vertical
Temp	20°C	Hum.	53%

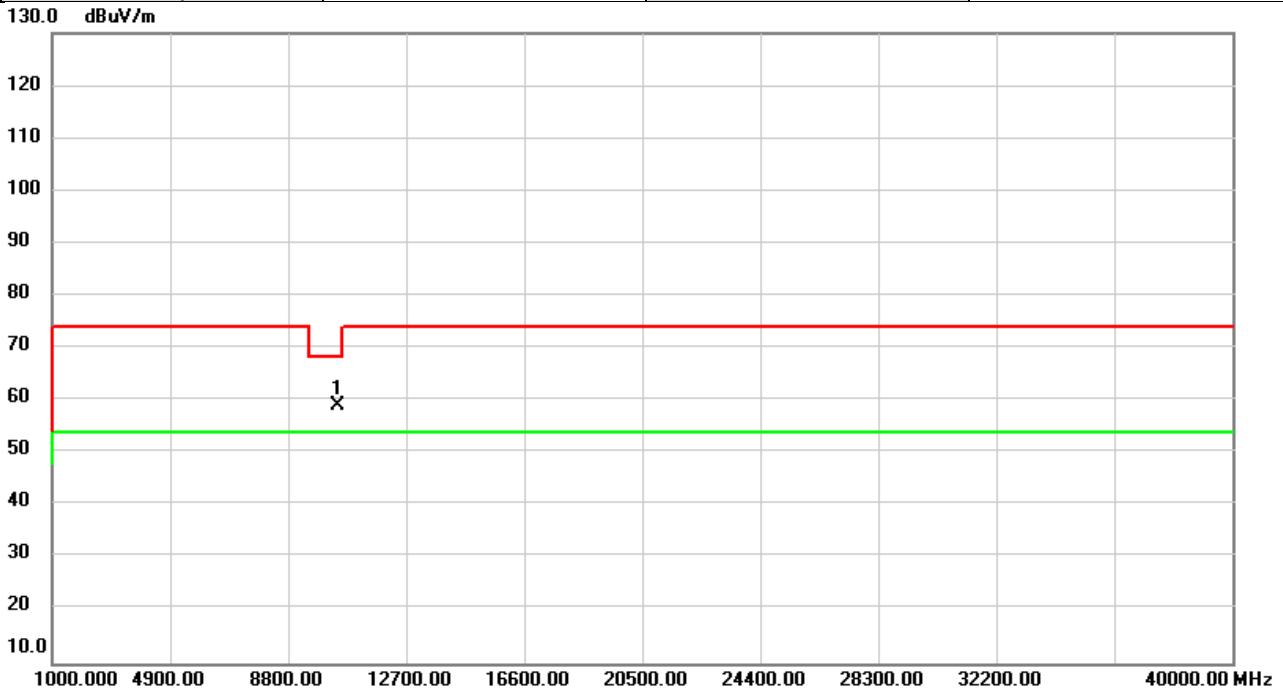


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	54.13	4.84	58.97	68.20	-9.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/6/25
Test Frequency	5210	Polarization	Horizontal
Temp	20°C	Hum.	53%

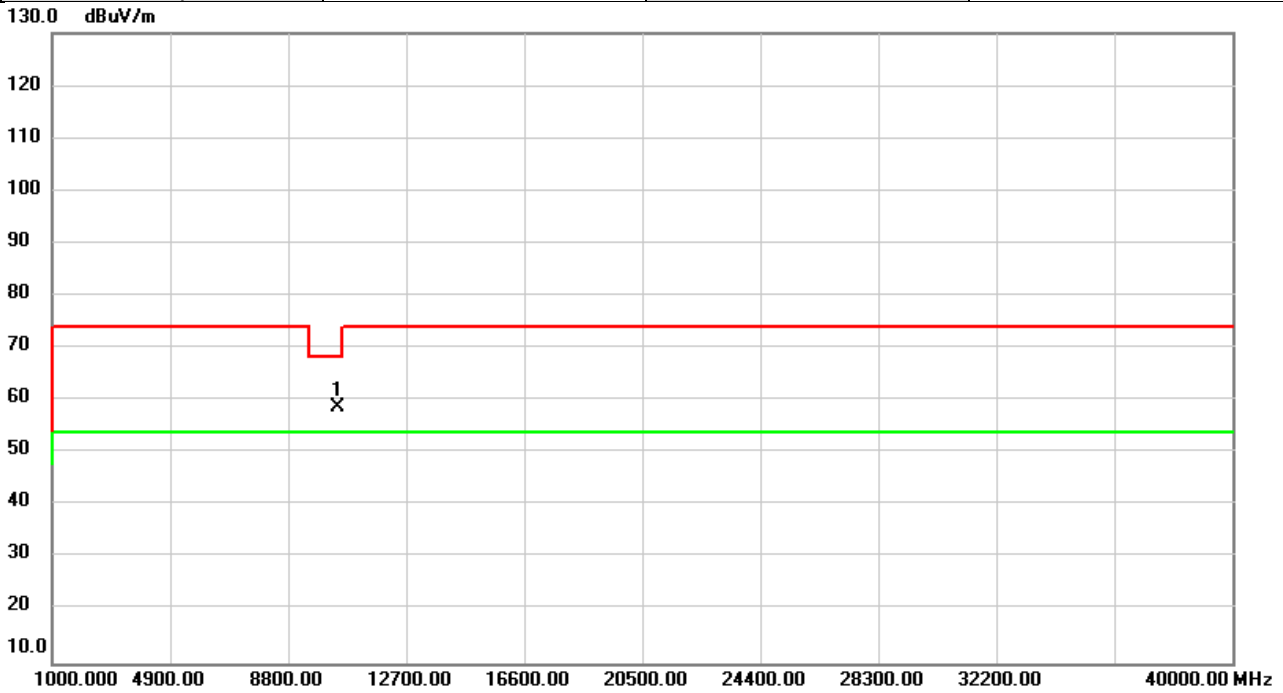


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	53.81	4.84	58.65	68.20	-9.55	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/6/25
Test Frequency	5290	Polarization	Vertical
Temp	20°C	Hum.	53%

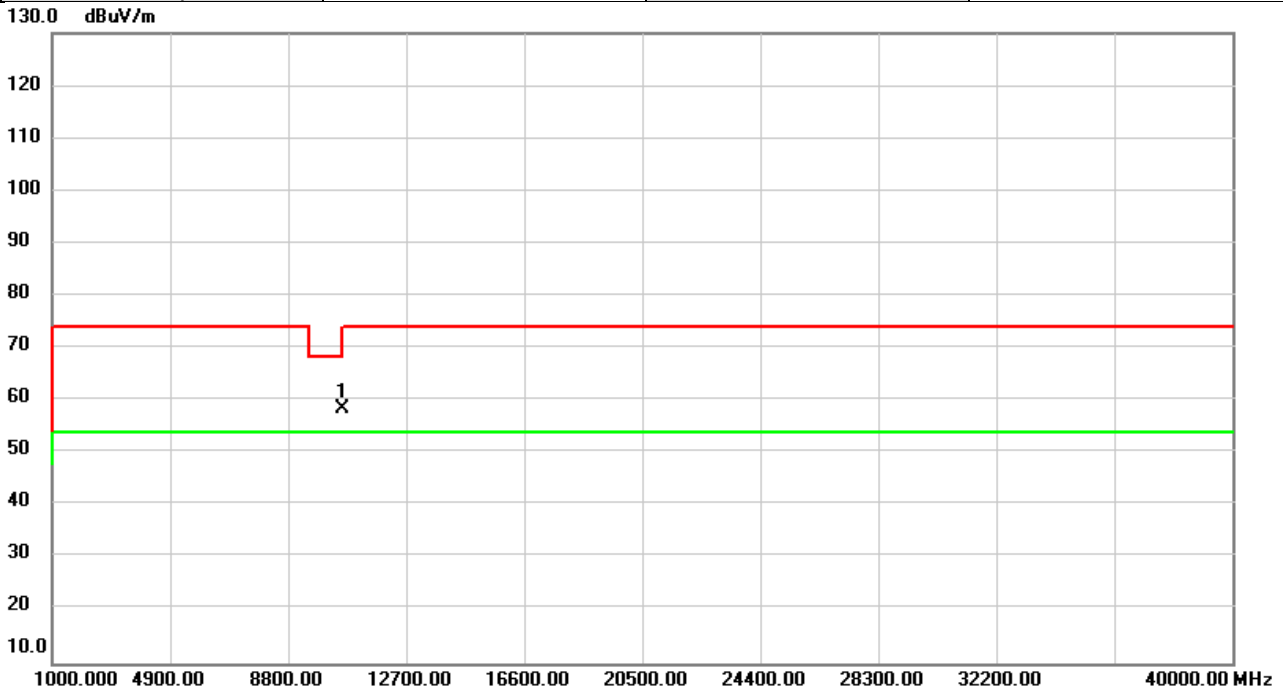


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	53.20	5.25	58.45	68.20	-9.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/6/25
Test Frequency	5290	Polarization	Horizontal
Temp	20°C	Hum.	53%

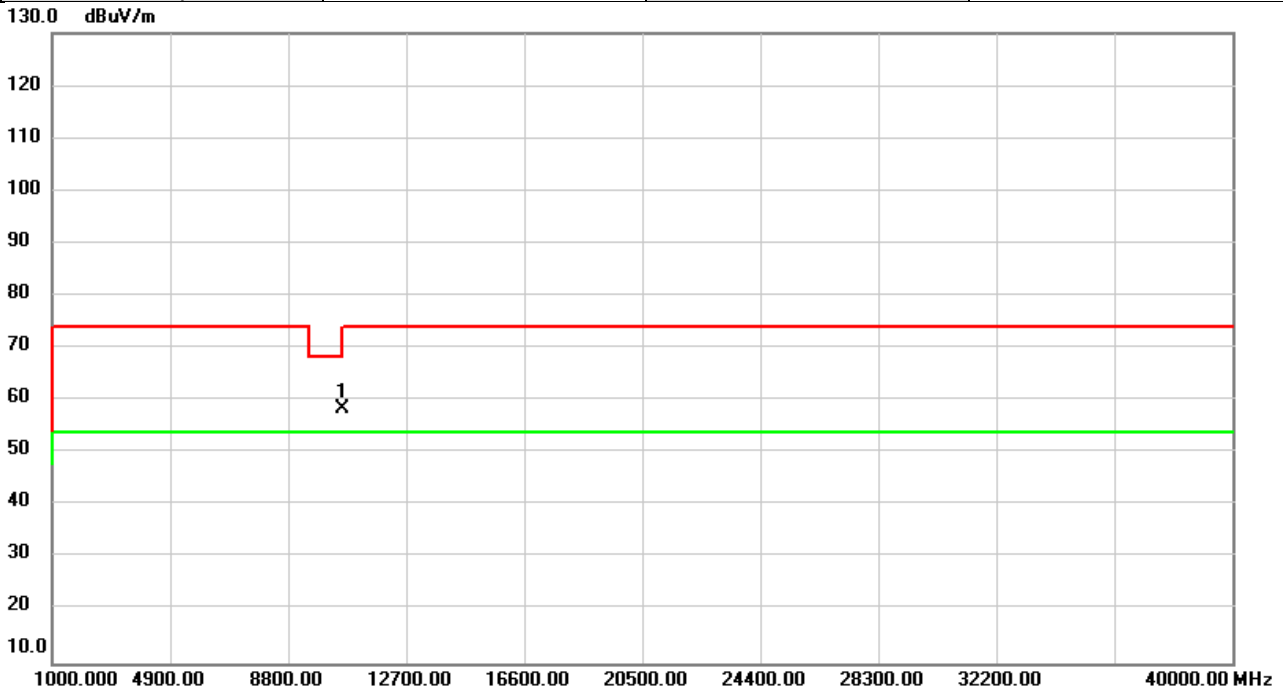


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	53.27	5.25	58.52	68.20	-9.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/6/25
Test Frequency	5530	Polarization	Vertical
Temp	20°C	Hum.	53%

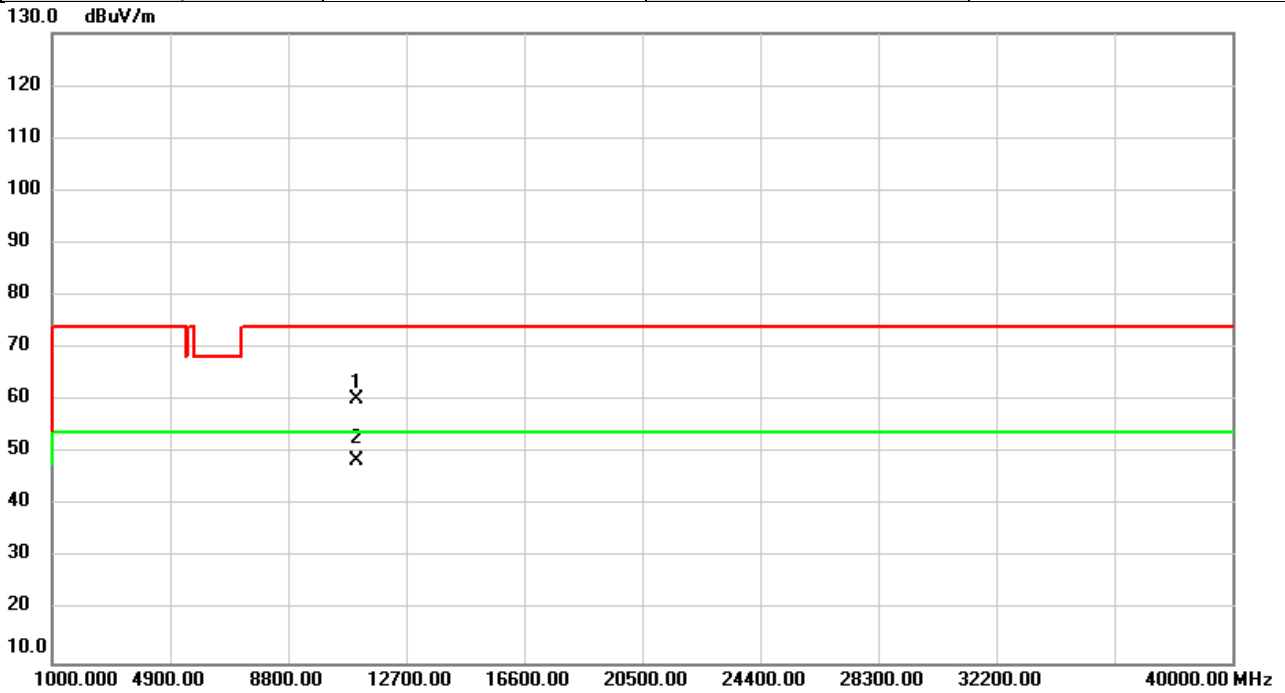


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11060.00	53.85	6.35	60.20	74.00	-13.80	peak	
2	*	11060.00	42.23	6.35	48.58	54.00	-5.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/6/25
Test Frequency	5530	Polarization	Horizontal
Temp	20°C	Hum.	53%

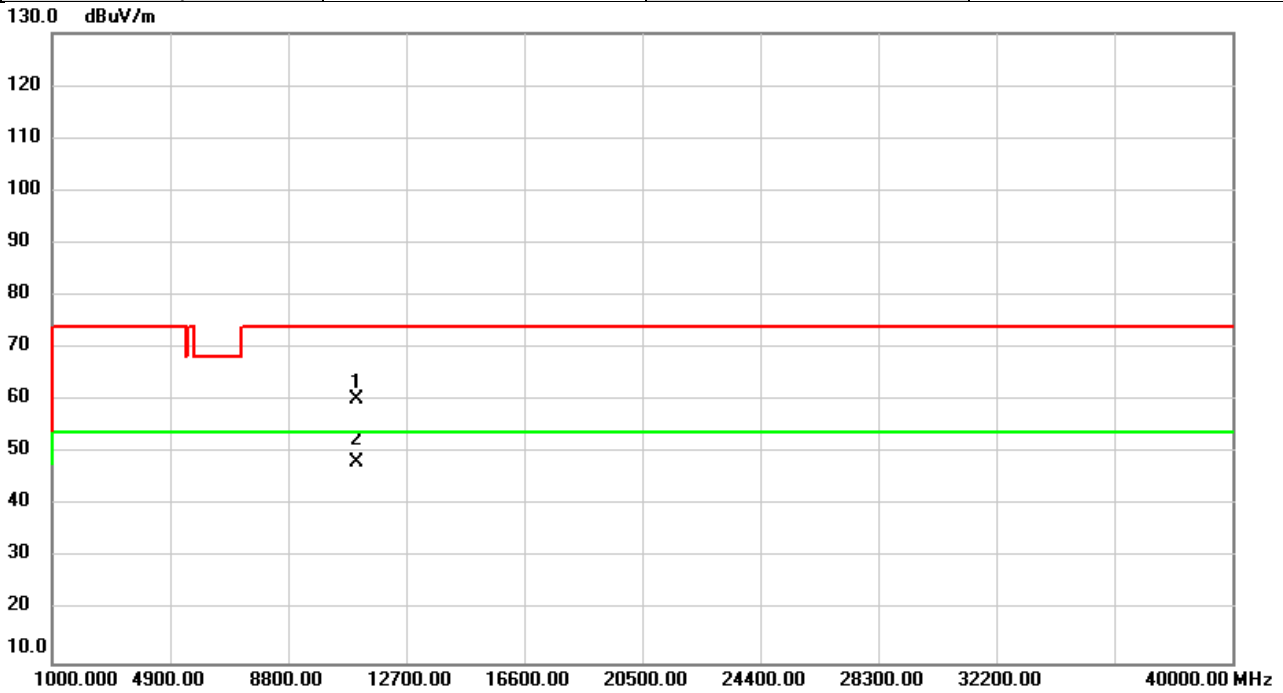


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11060.00	53.92	6.35	60.27	74.00	-13.73	peak	
2	*	11060.00	41.94	6.35	48.29	54.00	-5.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/6/25
Test Frequency	5610	Polarization	Vertical
Temp	20°C	Hum.	53%

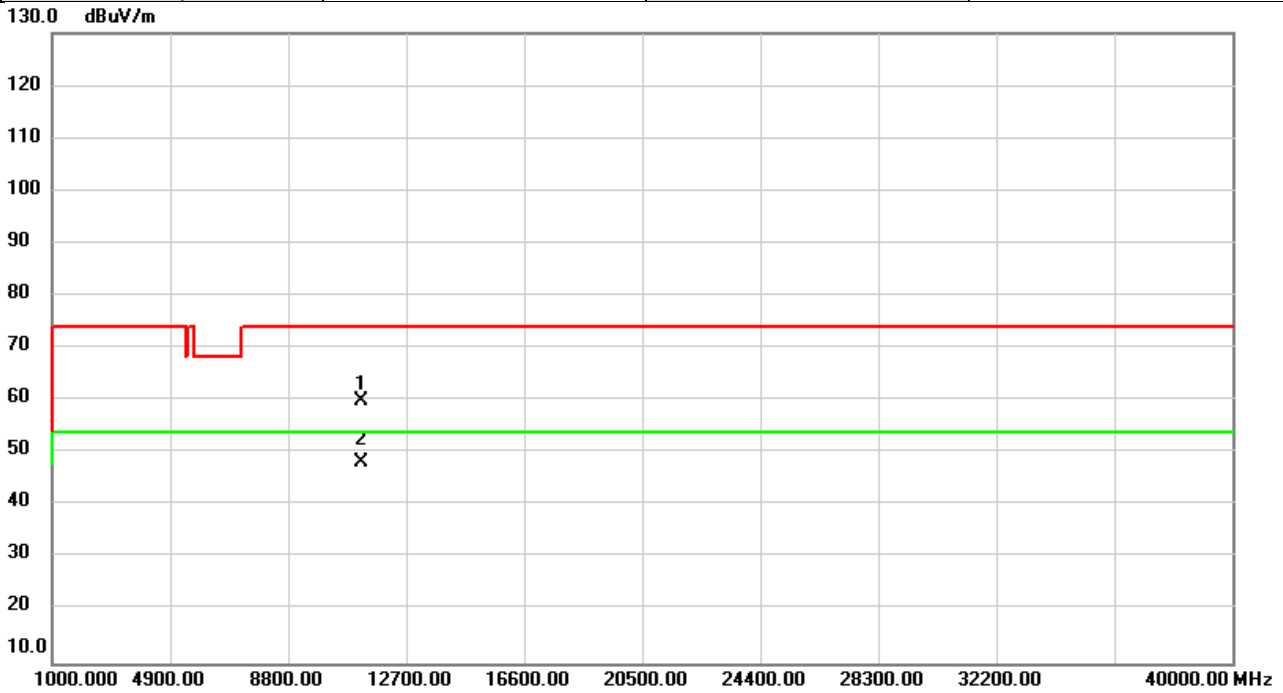


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11220.00	54.14	5.87	60.01	74.00	-13.99	peak	
2	*	11220.00	42.53	5.87	48.40	54.00	-5.60	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/6/25
Test Frequency	5610	Polarization	Horizontal
Temp	20°C	Hum.	53%

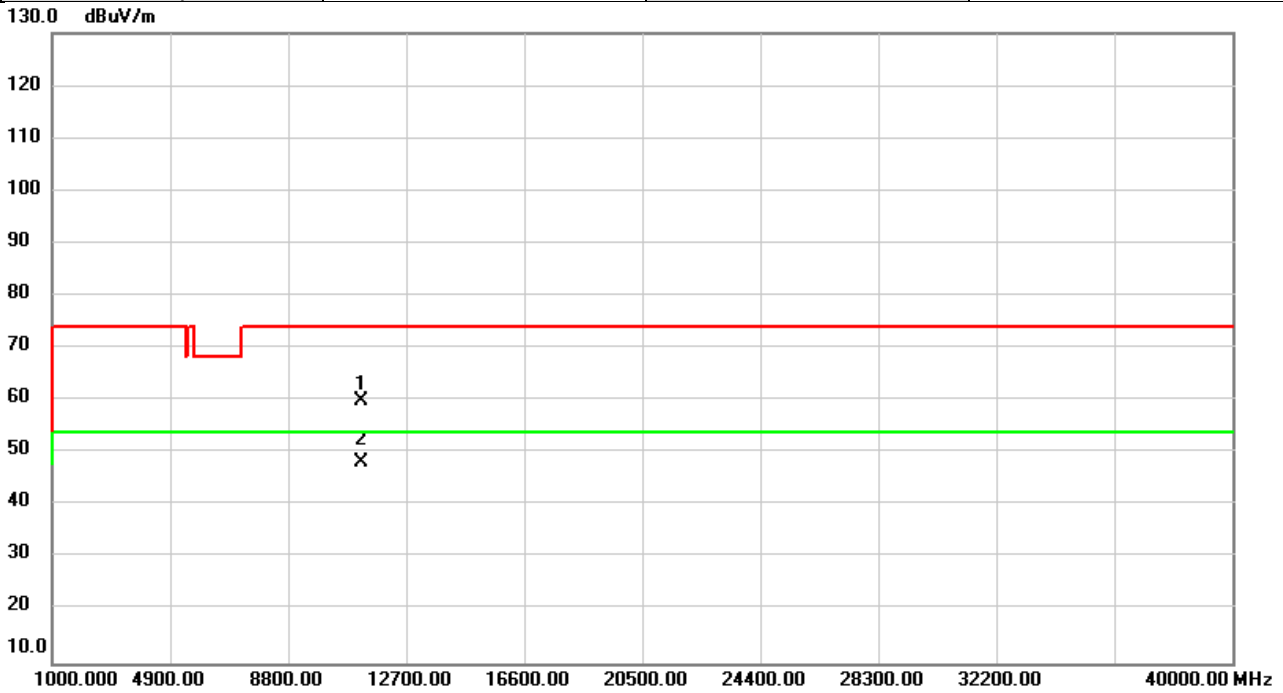


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11220.00	54.11	5.87	59.98	74.00	-14.02	peak	
2	*	11220.00	42.30	5.87	48.17	54.00	-5.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/6/25
Test Frequency	5775	Polarization	Vertical
Temp	20°C	Hum.	53%

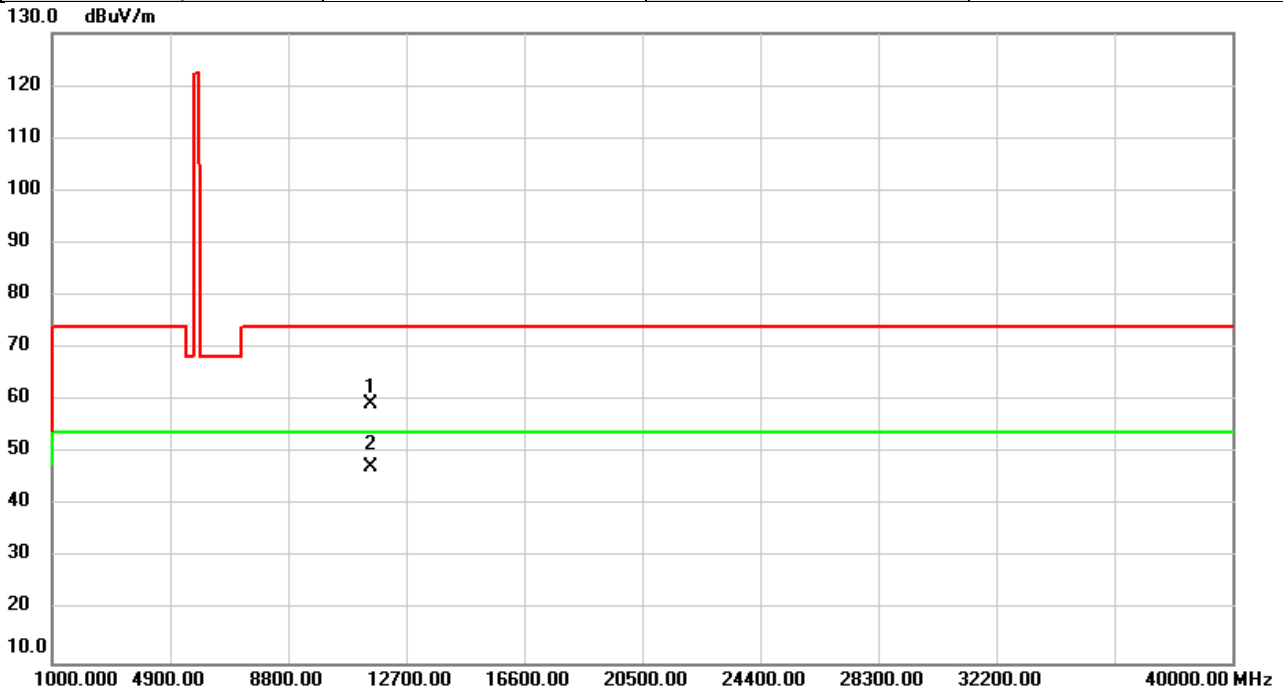


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11550.00	54.53	4.92	59.45	74.00	-14.55	peak	
2	*	11550.00	42.52	4.92	47.44	54.00	-6.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/6/25
Test Frequency	5775	Polarization	Horizontal
Temp	20°C	Hum.	53%

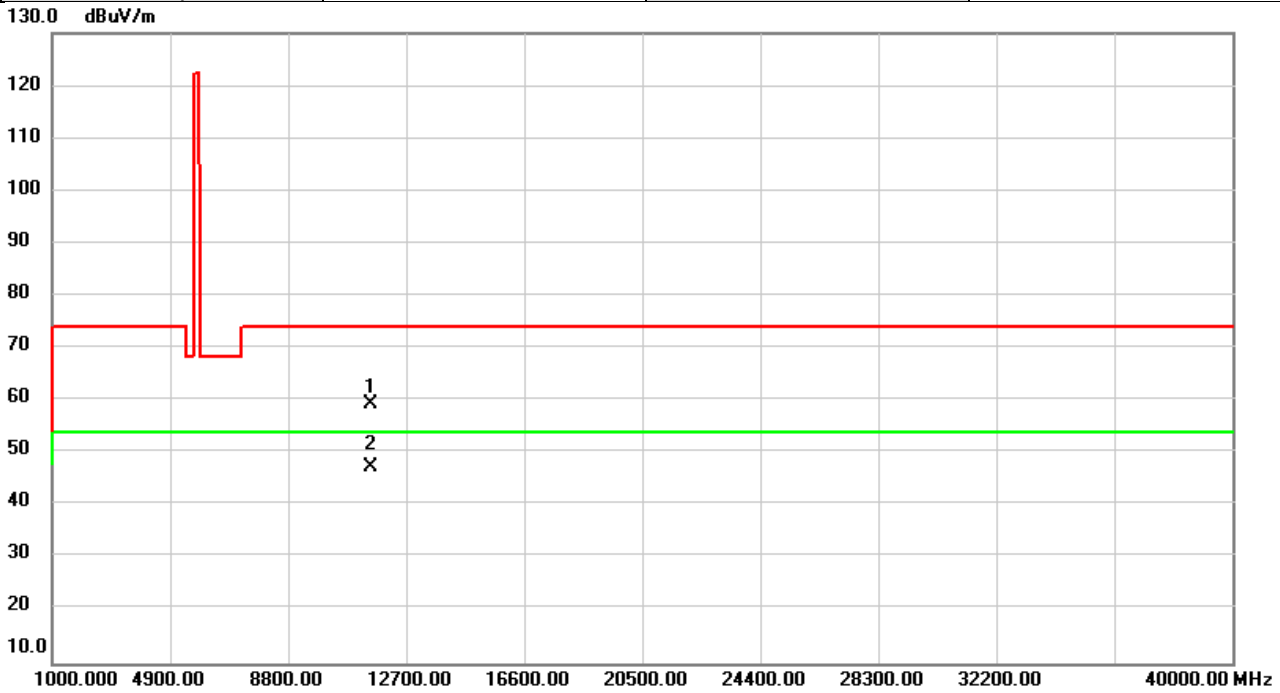


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11550.00	54.33	4.92	59.25	74.00	-14.75	peak	
2	*	11550.00	42.32	4.92	47.24	54.00	-6.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2020/6/25
Test Frequency	5250	Polarization	Vertical
Temp	20°C	Hum.	53%

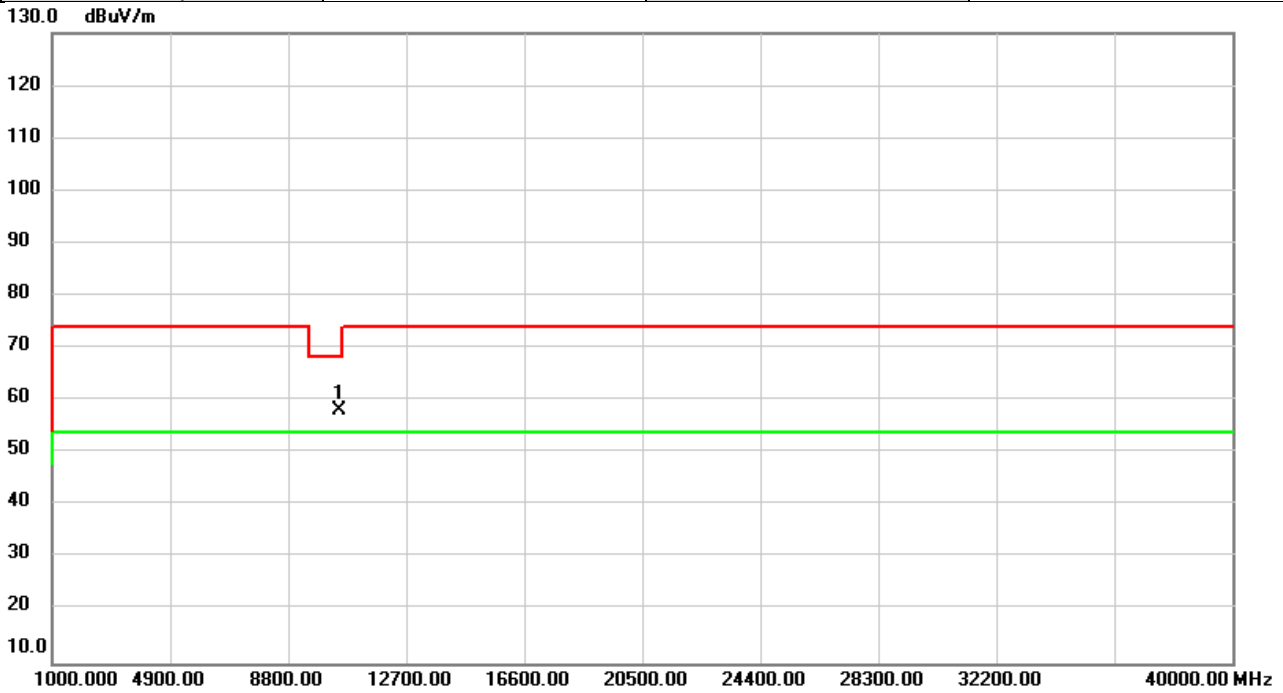


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10500.00	53.13	5.00	58.13	68.20	-10.07	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2020/6/25
Test Frequency	5250	Polarization	Horizontal
Temp	20°C	Hum.	53%

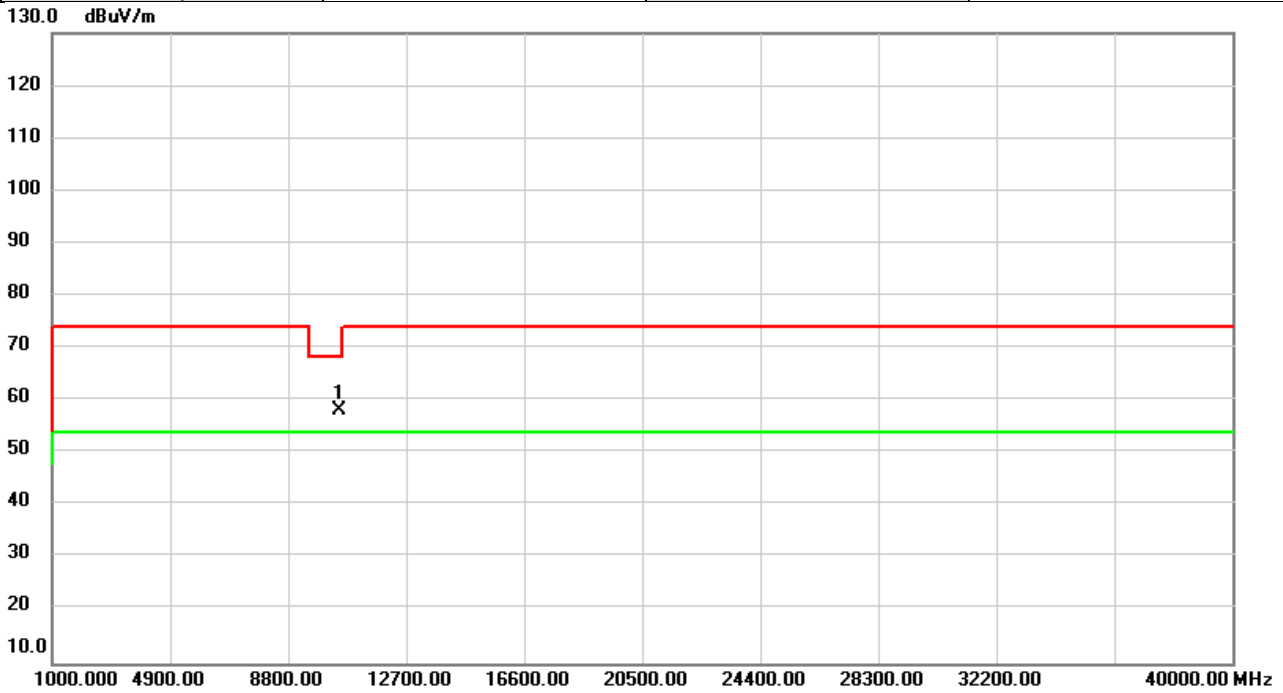


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10500.00	53.27	5.00	58.27	68.20	-9.93	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2020/6/25
Test Frequency	5570	Polarization	Vertical
Temp	20°C	Hum.	53%

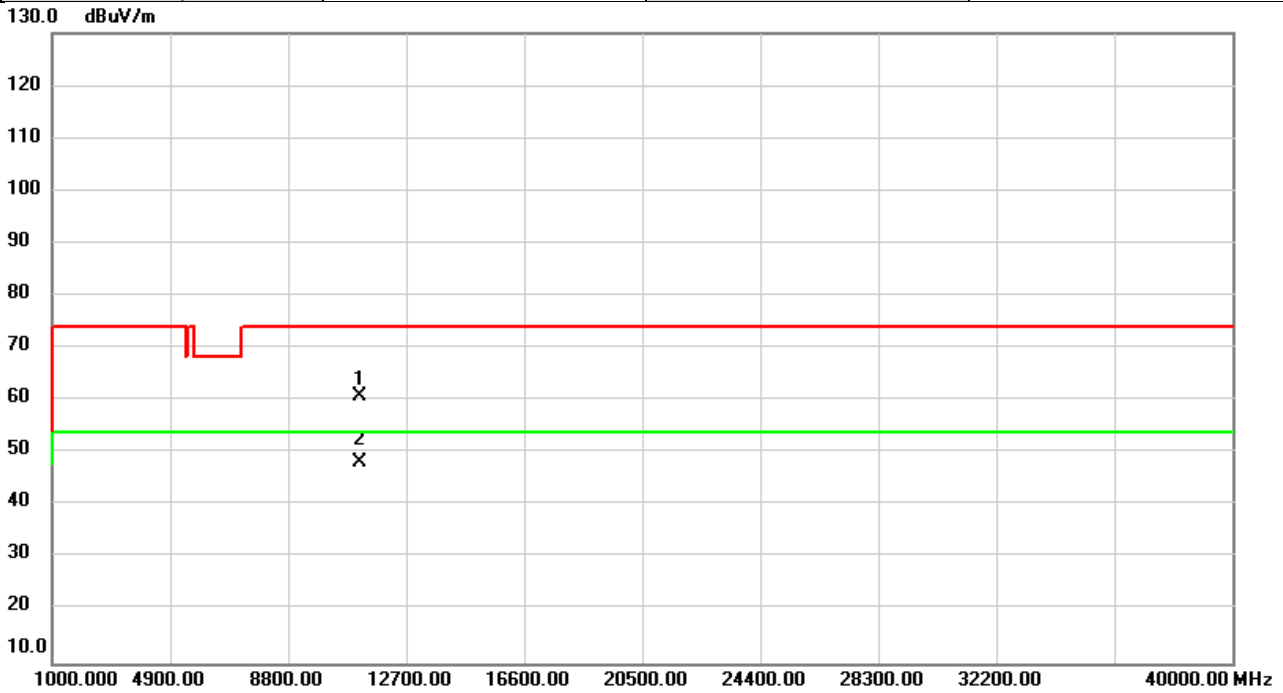


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11140.00	54.59	6.12	60.71	74.00	-13.29	peak	
2	*	11140.00	42.20	6.12	48.32	54.00	-5.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2020/6/25
Test Frequency	5570	Polarization	Horizontal
Temp	20°C	Hum.	53%

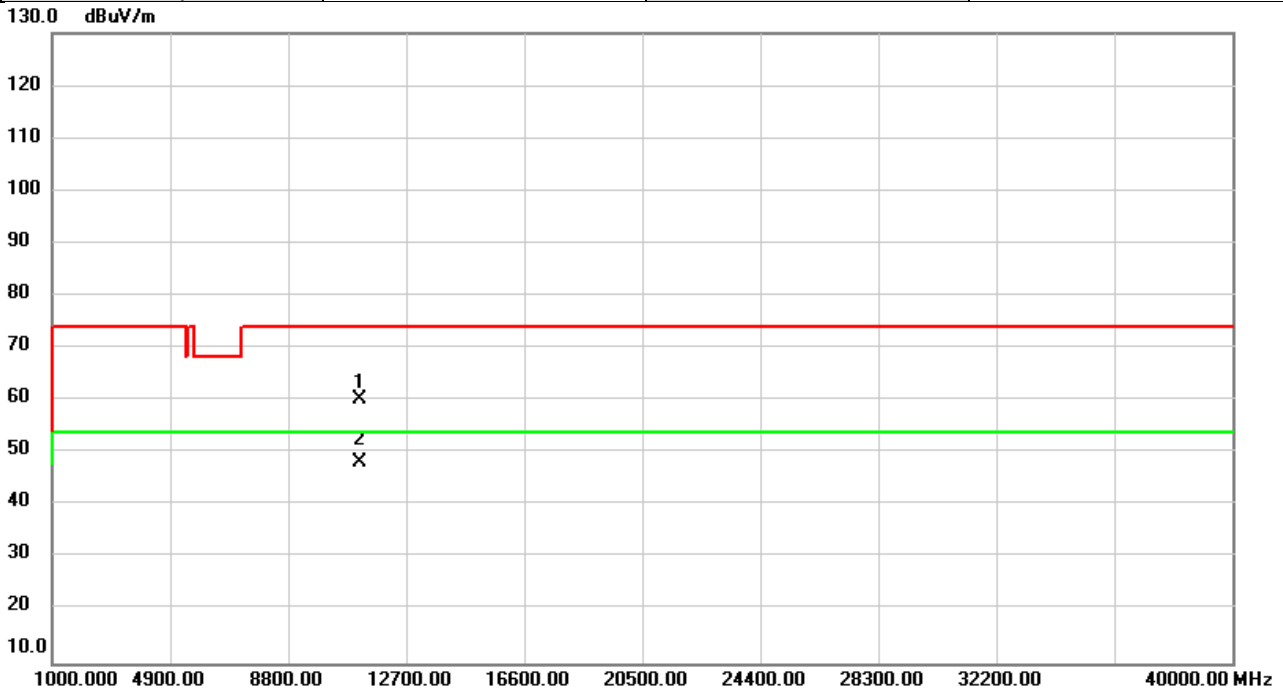


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11140.00	54.14	6.12	60.26	74.00	-13.74	peak	
2	*	11140.00	42.01	6.12	48.13	54.00	-5.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/25
Test Frequency	5180	Polarization	Vertical
Temp	20°C	Hum.	53%

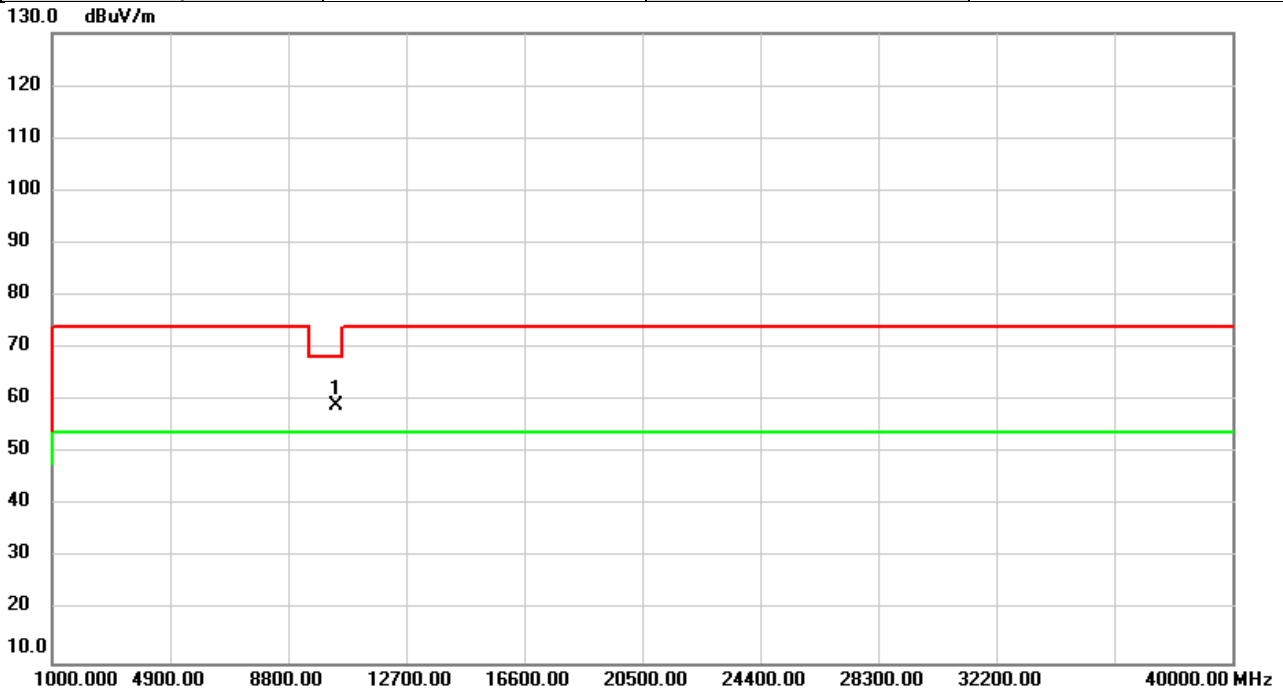


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	54.32	4.73	59.05	68.20	-9.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/25
Test Frequency	5180	Polarization	Horizontal
Temp	20°C	Hum.	53%

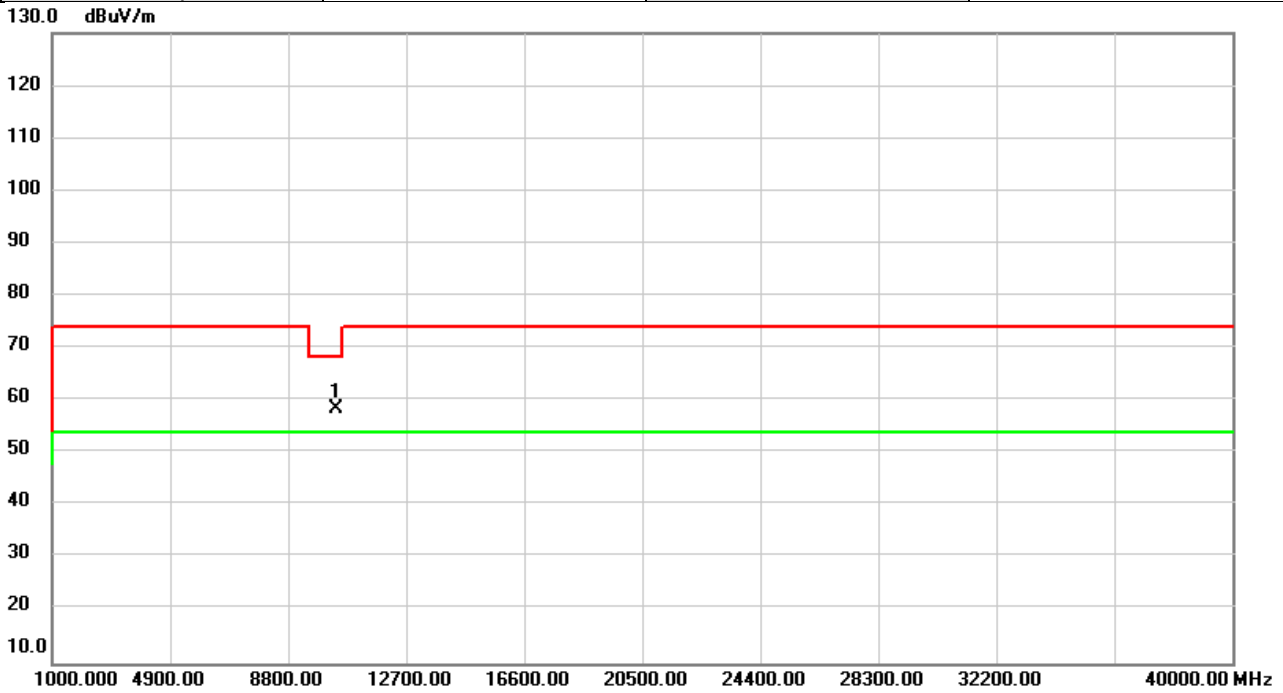


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	53.75	4.73	58.48	68.20	-9.72	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/25
Test Frequency	5200	Polarization	Vertical
Temp	20°C	Hum.	53%

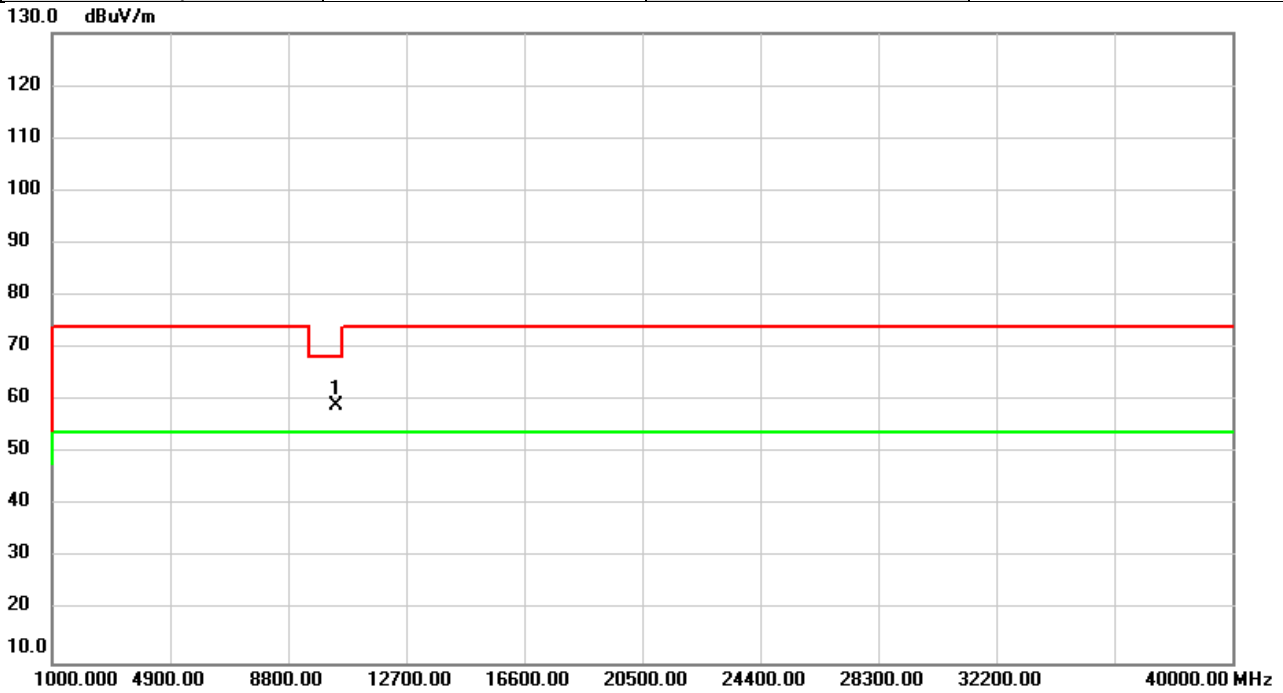


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	54.19	4.80	58.99	68.20	-9.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/25
Test Frequency	5200	Polarization	Horizontal
Temp	20°C	Hum.	53%

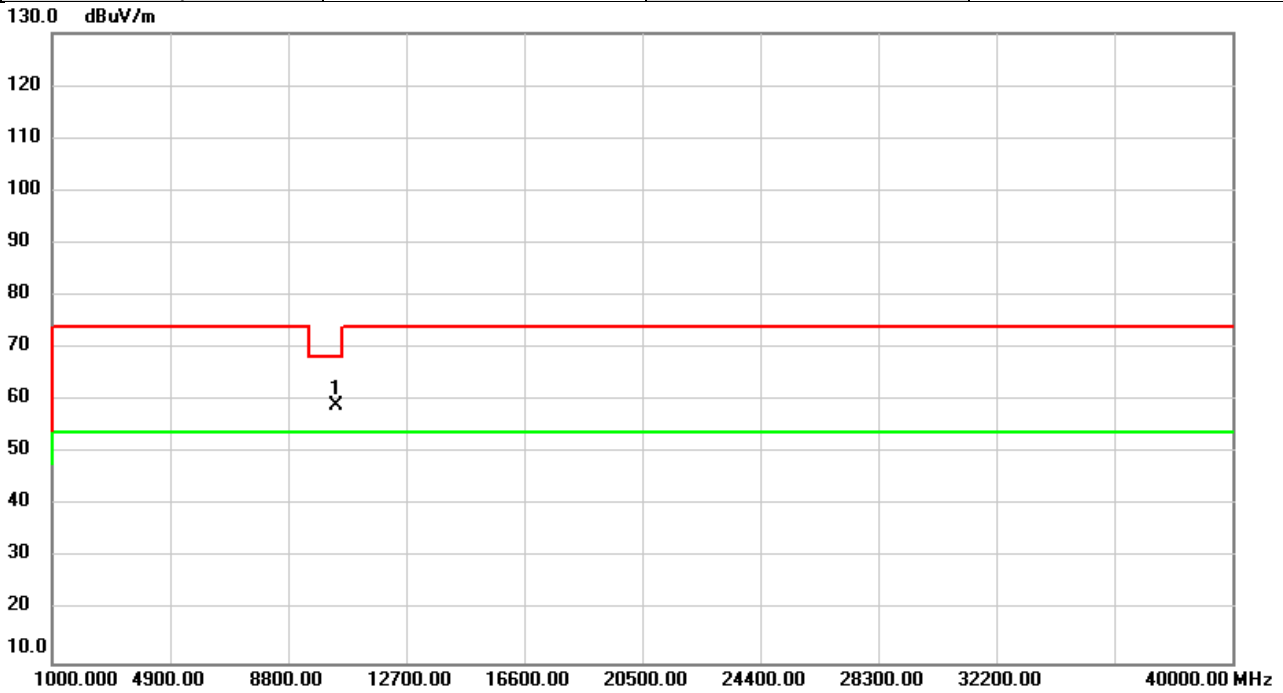


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	54.32	4.80	59.12	68.20	-9.08	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/25
Test Frequency	5240	Polarization	Vertical
Temp	20°C	Hum.	53%

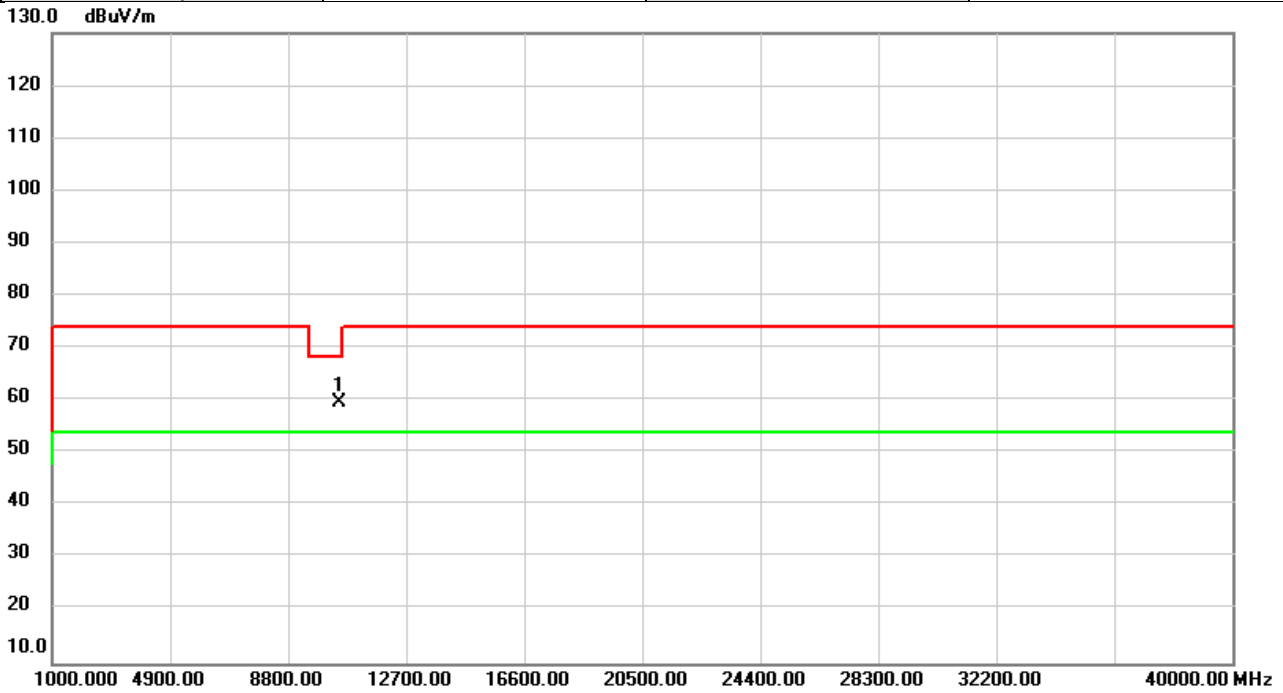


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	54.58	4.96	59.54	68.20	-8.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/25
Test Frequency	5240	Polarization	Horizontal
Temp	20°C	Hum.	53%

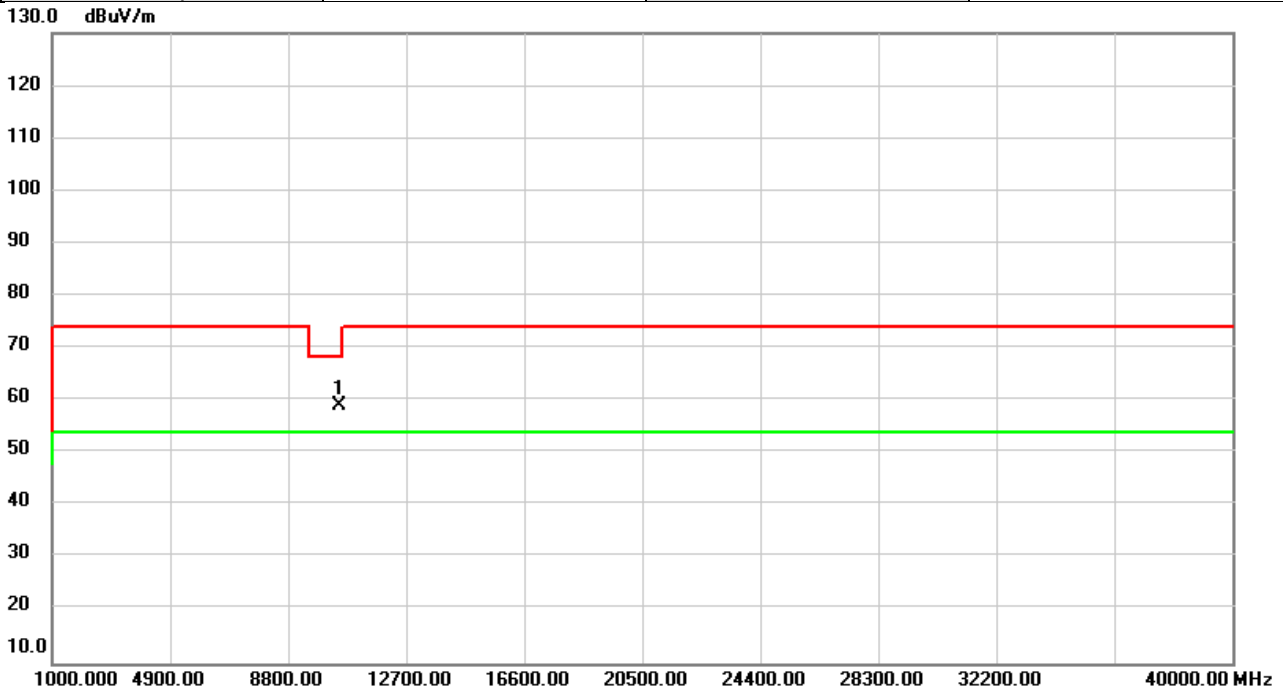


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	53.99	4.96	58.95	68.20	-9.25	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/1
Test Frequency	5260	Polarization	Vertical
Temp	22°C	Hum.	53%

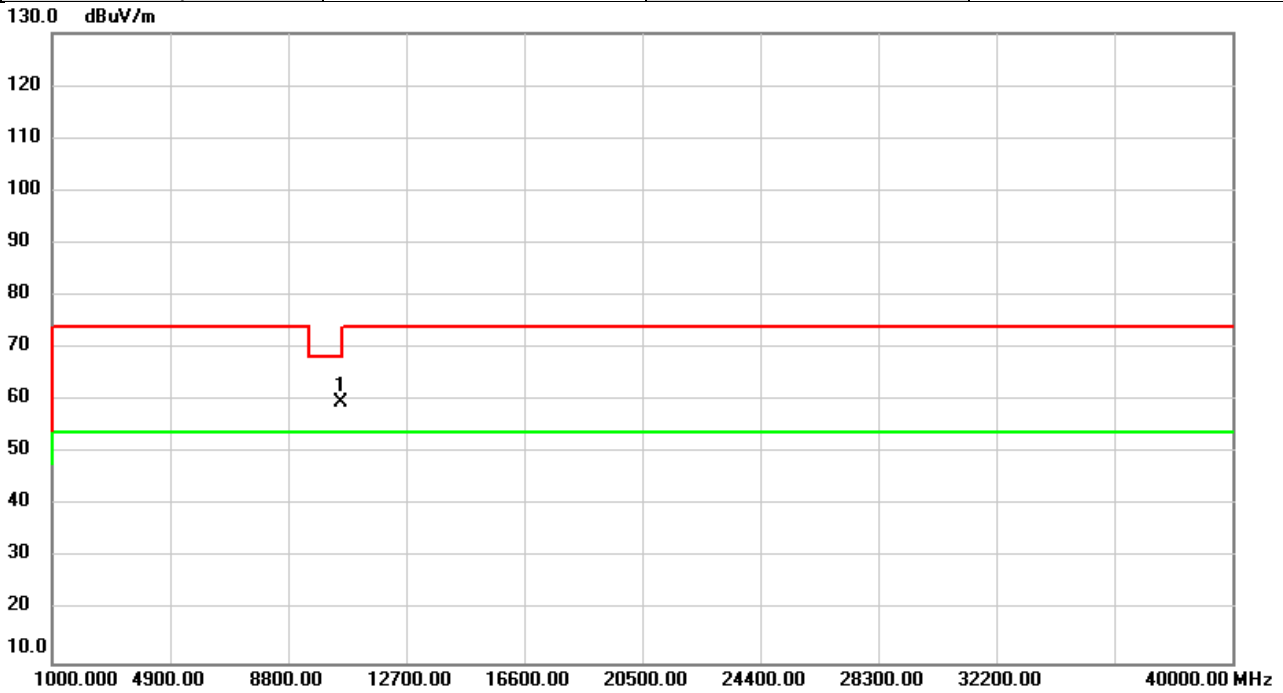


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	54.59	5.06	59.65	68.20	-8.55	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/1
Test Frequency	5260	Polarization	Horizontal
Temp	22°C	Hum.	53%

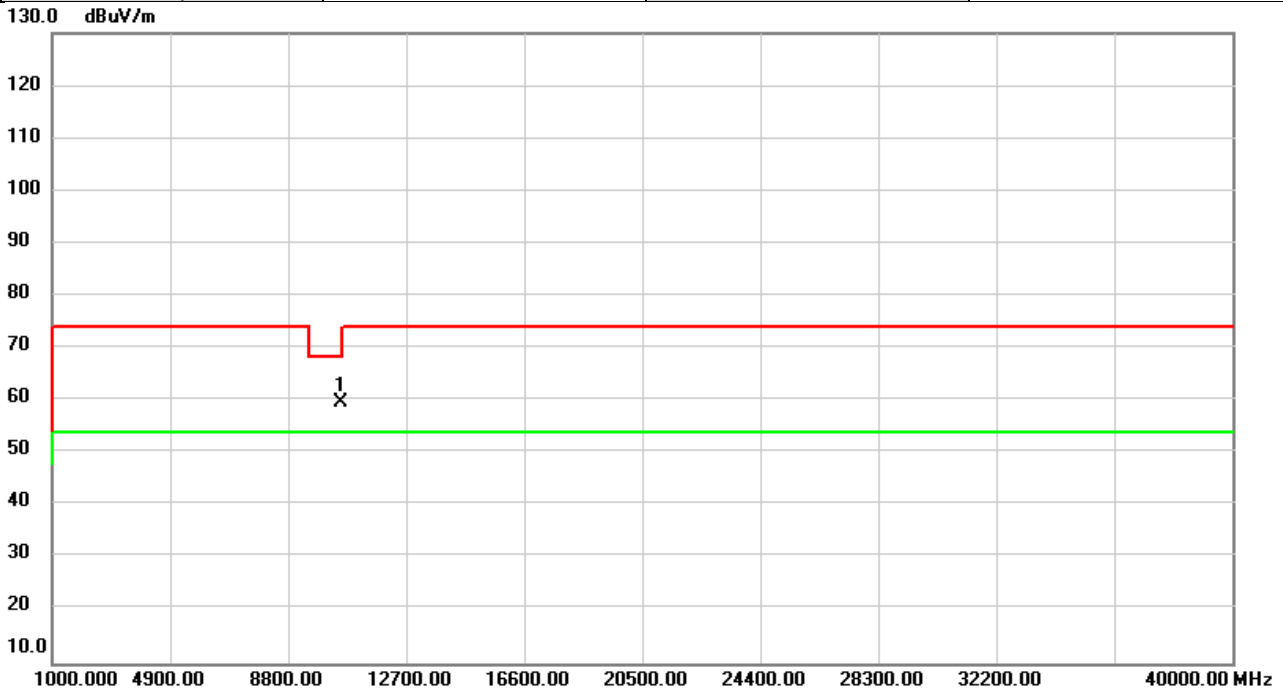


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	54.53	5.06	59.59	68.20	-8.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/1
Test Frequency	5300	Polarization	Vertical
Temp	22°C	Hum.	53%

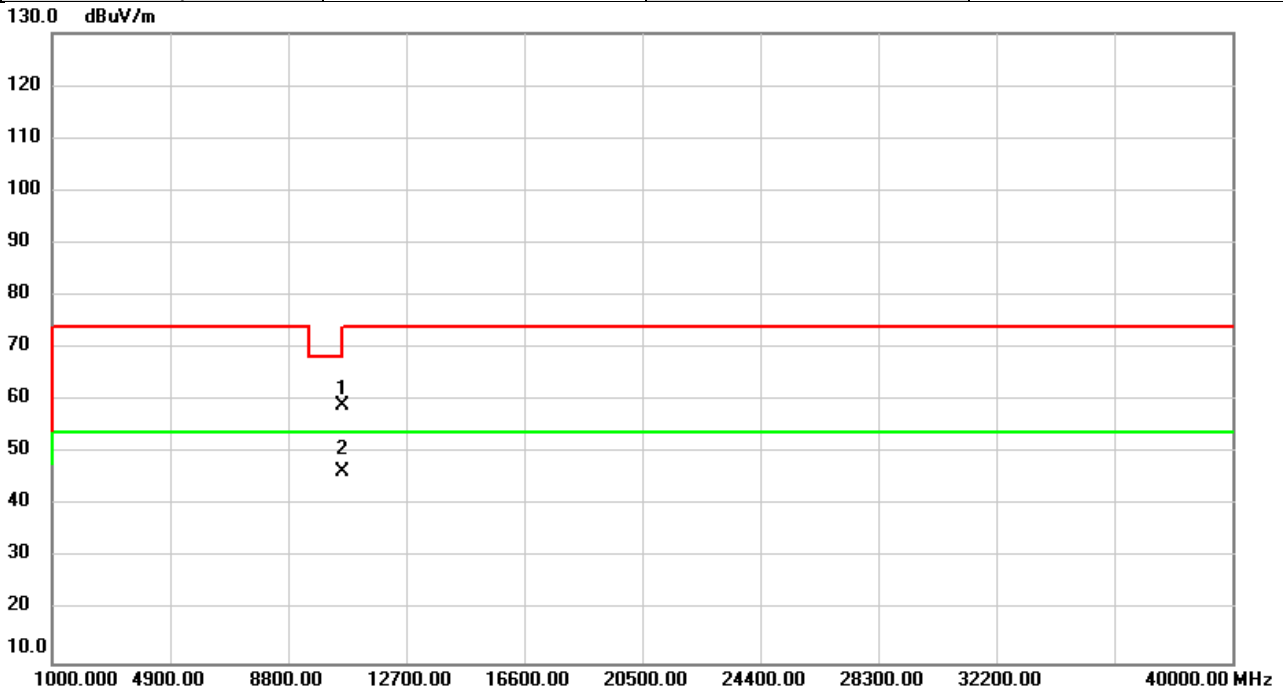


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10600.00	53.65	5.31	58.96	68.20	-9.24	peak	
2	*	10600.00	41.01	5.31	46.32	54.00	-7.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/1
Test Frequency	5300	Polarization	Horizontal
Temp	22°C	Hum.	53%

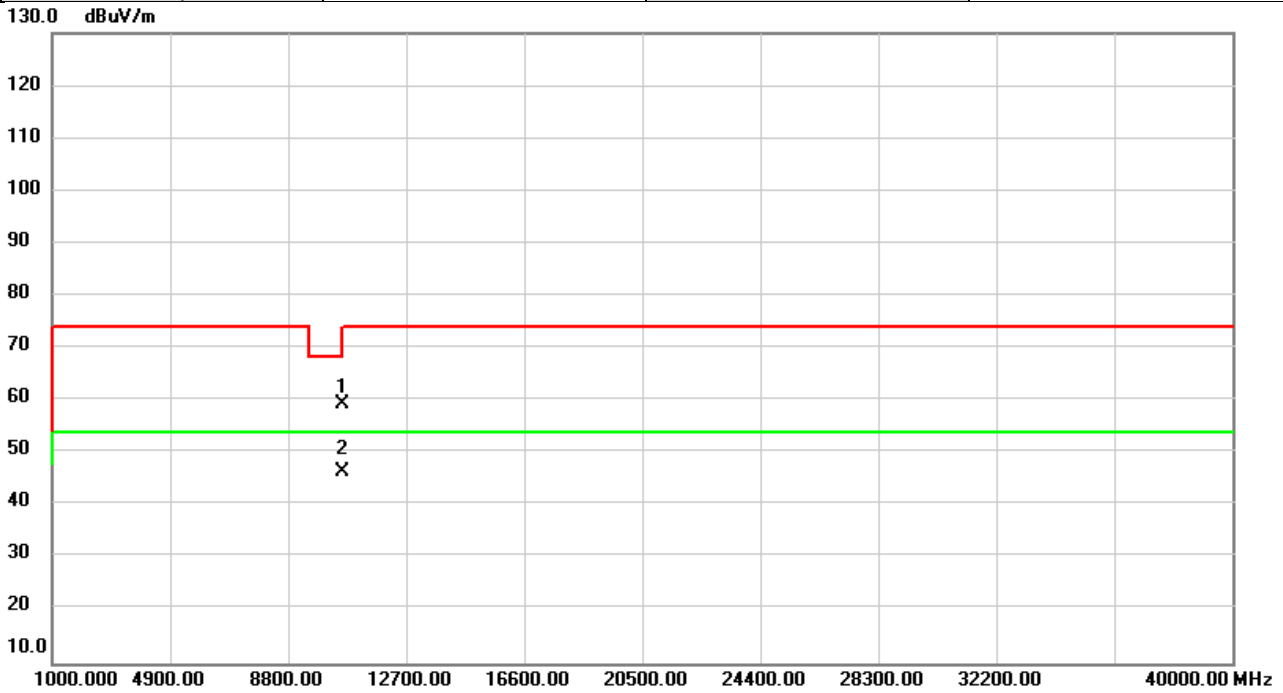


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10600.00	54.01	5.31	59.32	68.20	-8.88	peak	
2	*	10600.00	41.28	5.31	46.59	54.00	-7.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/25
Test Frequency	5320	Polarization	Vertical
Temp	20°C	Hum.	53%

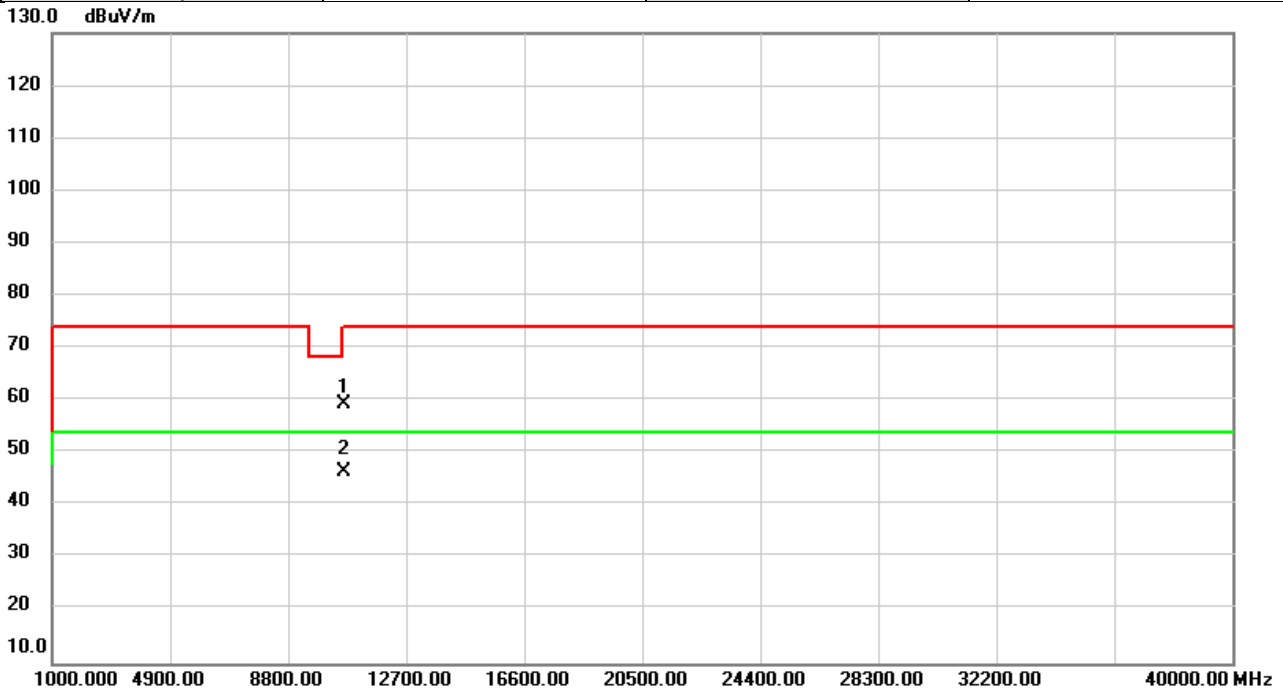


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	53.91	5.43	59.34	74.00	-14.66	peak	
2	*	10640.00	40.88	5.43	46.31	54.00	-7.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/25
Test Frequency	5320	Polarization	Horizontal
Temp	20°C	Hum.	53%

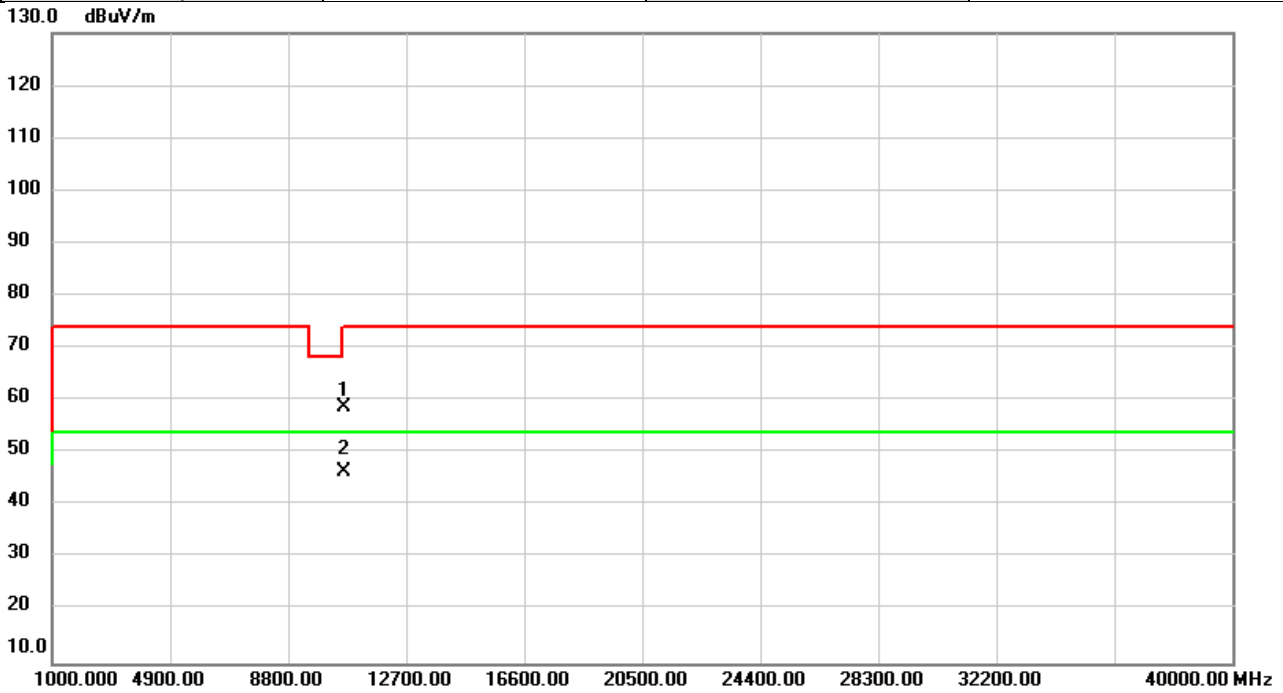


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	53.23	5.43	58.66	74.00	-15.34	peak	
2	*	10640.00	40.99	5.43	46.42	54.00	-7.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/25
Test Frequency	5500	Polarization	Vertical
Temp	20°C	Hum.	53%

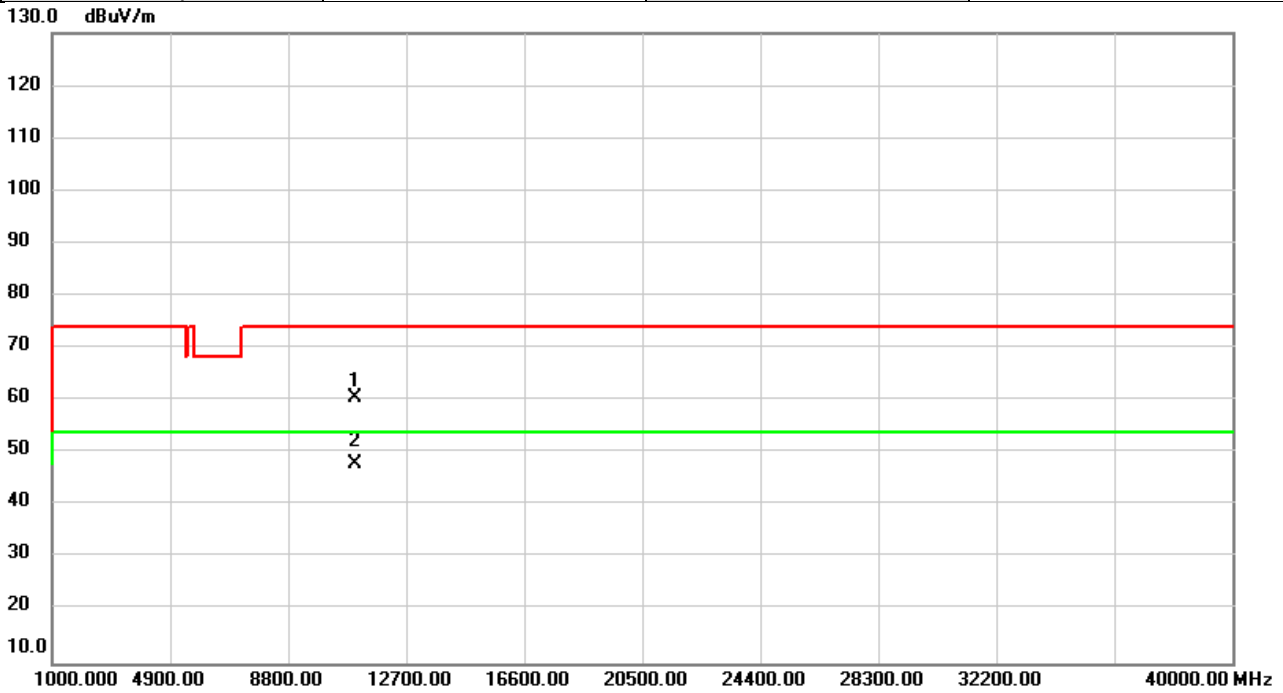


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11000.00	53.99	6.54	60.53	74.00	-13.47	peak	
2	*	11000.00	41.31	6.54	47.85	54.00	-6.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/25
Test Frequency	5500	Polarization	Horizontal
Temp	20°C	Hum.	53%

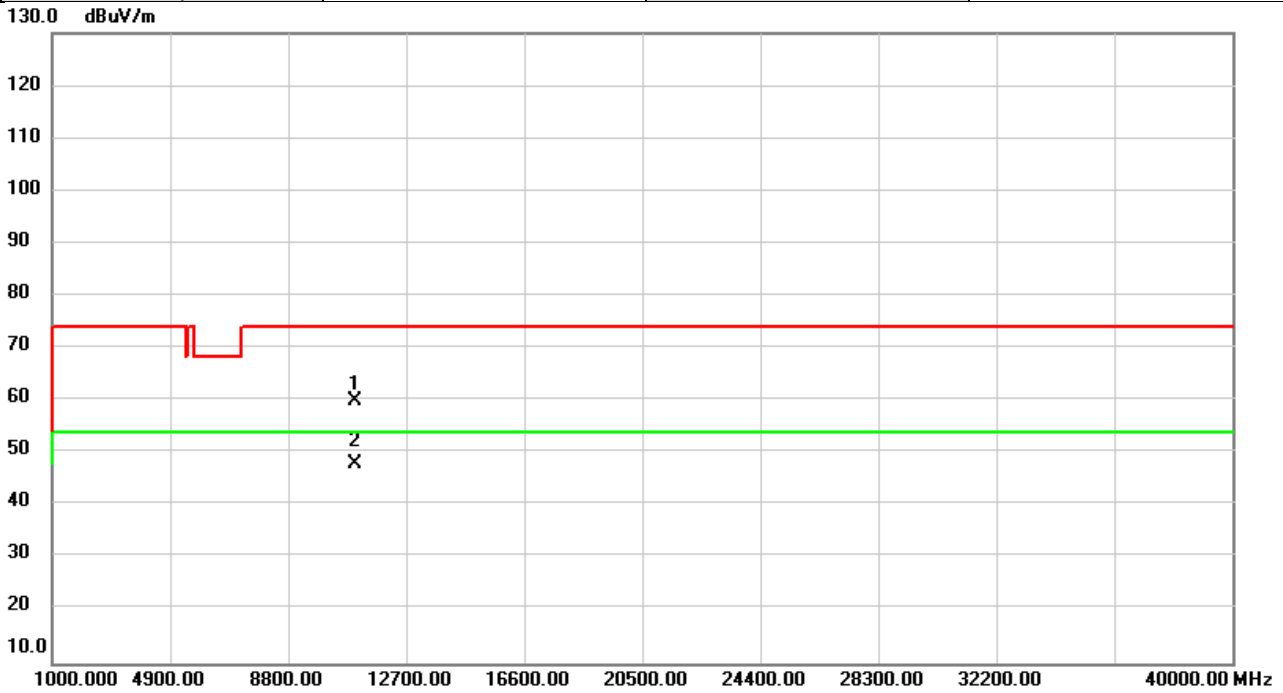


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11000.00	53.38	6.54	59.92	74.00	-14.08	peak	
2	*	11000.00	41.44	6.54	47.98	54.00	-6.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/1
Test Frequency	5580	Polarization	Vertical
Temp	22°C	Hum.	53%

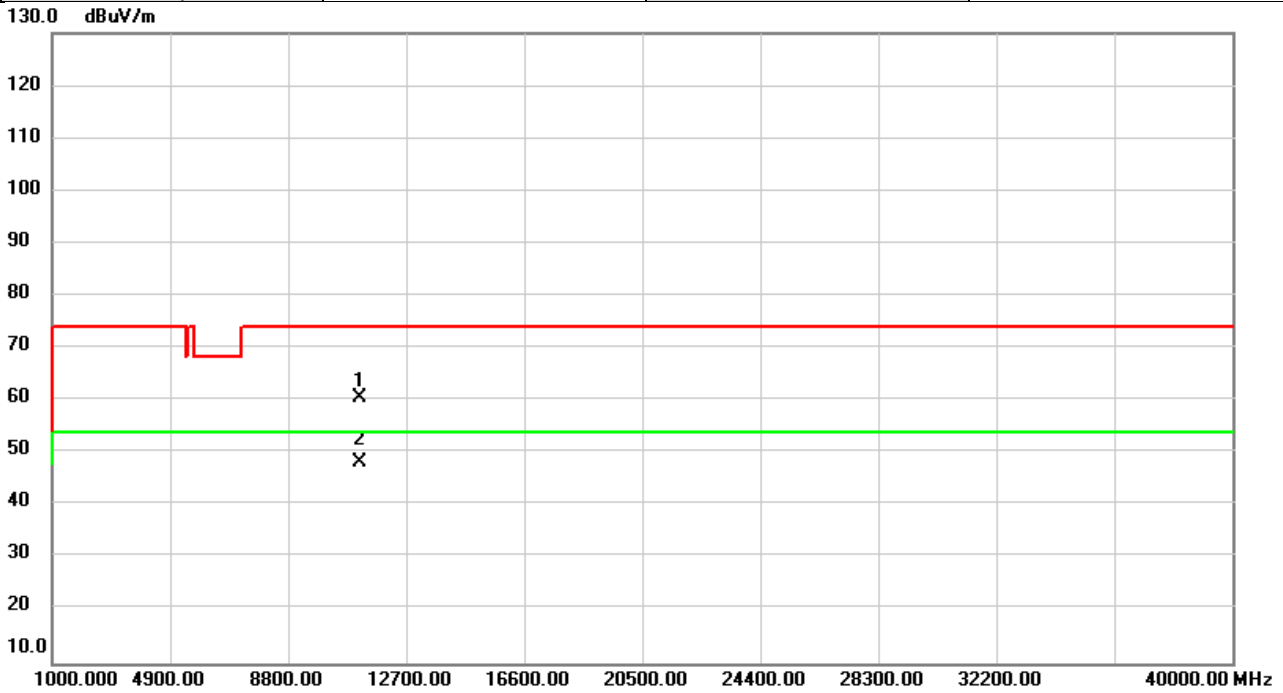


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11160.00	54.53	6.05	60.58	74.00	-13.42	peak	
2	*	11160.00	42.06	6.05	48.11	54.00	-5.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/1
Test Frequency	5580	Polarization	Horizontal
Temp	22°C	Hum.	53%

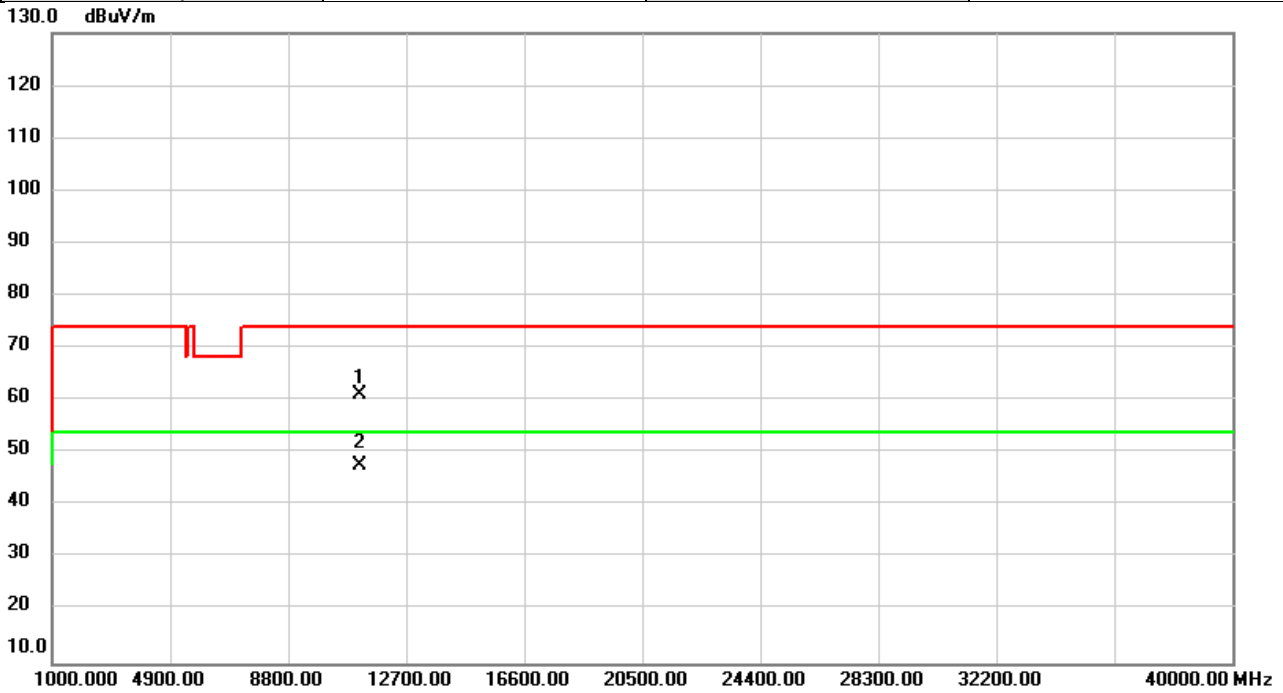


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11160.00	55.07	6.05	61.12	74.00	-12.88	peak	
2	*	11160.00	41.69	6.05	47.74	54.00	-6.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/25
Test Frequency	5700	Polarization	Vertical
Temp	20°C	Hum.	53%

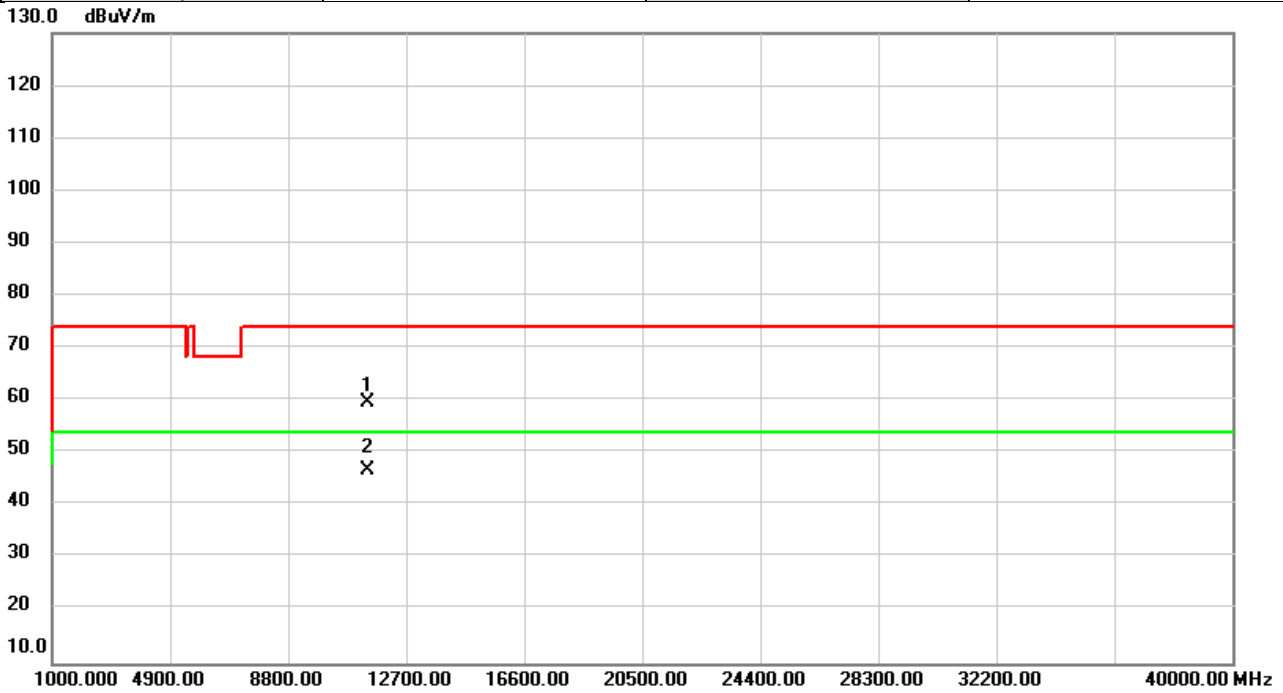


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11400.00	54.37	5.33	59.70	74.00	-14.30	peak	
2	*	11400.00	41.47	5.33	46.80	54.00	-7.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/25
Test Frequency	5700	Polarization	Horizontal
Temp	20°C	Hum.	53%

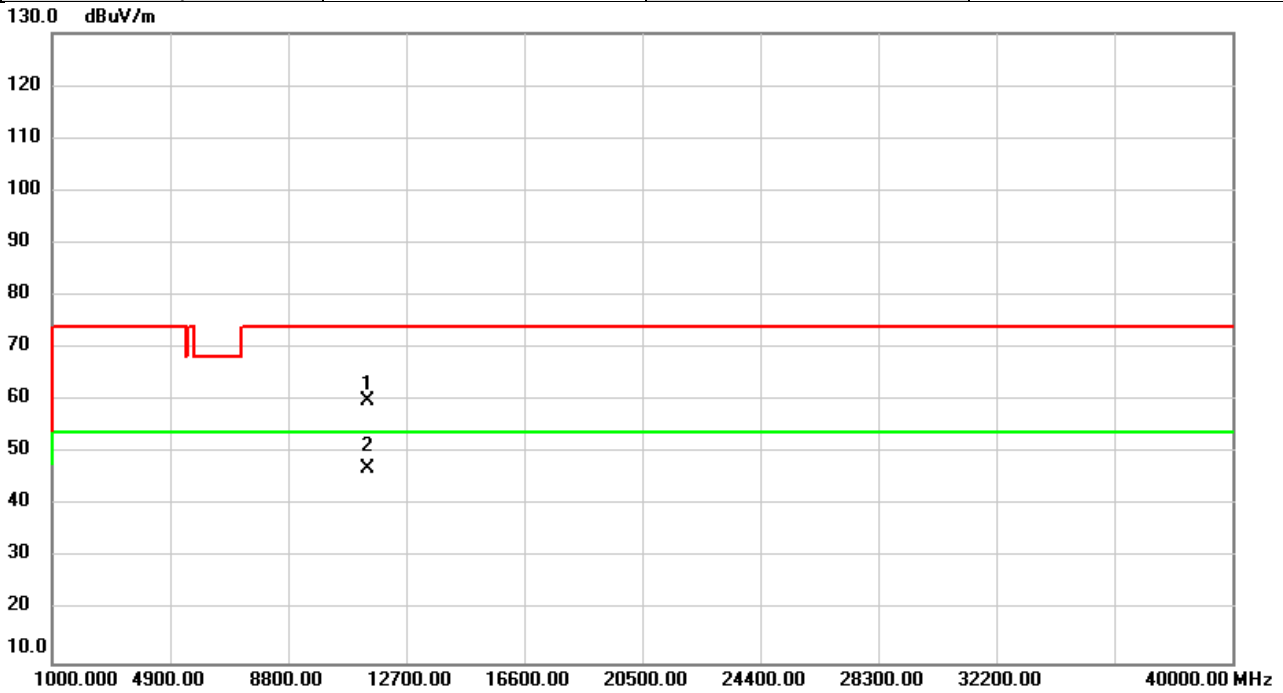


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11400.00	54.58	5.33	59.91	74.00	-14.09	peak	
2	*	11400.00	41.61	5.33	46.94	54.00	-7.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/25
Test Frequency	5745	Polarization	Vertical
Temp	20°C	Hum.	53%

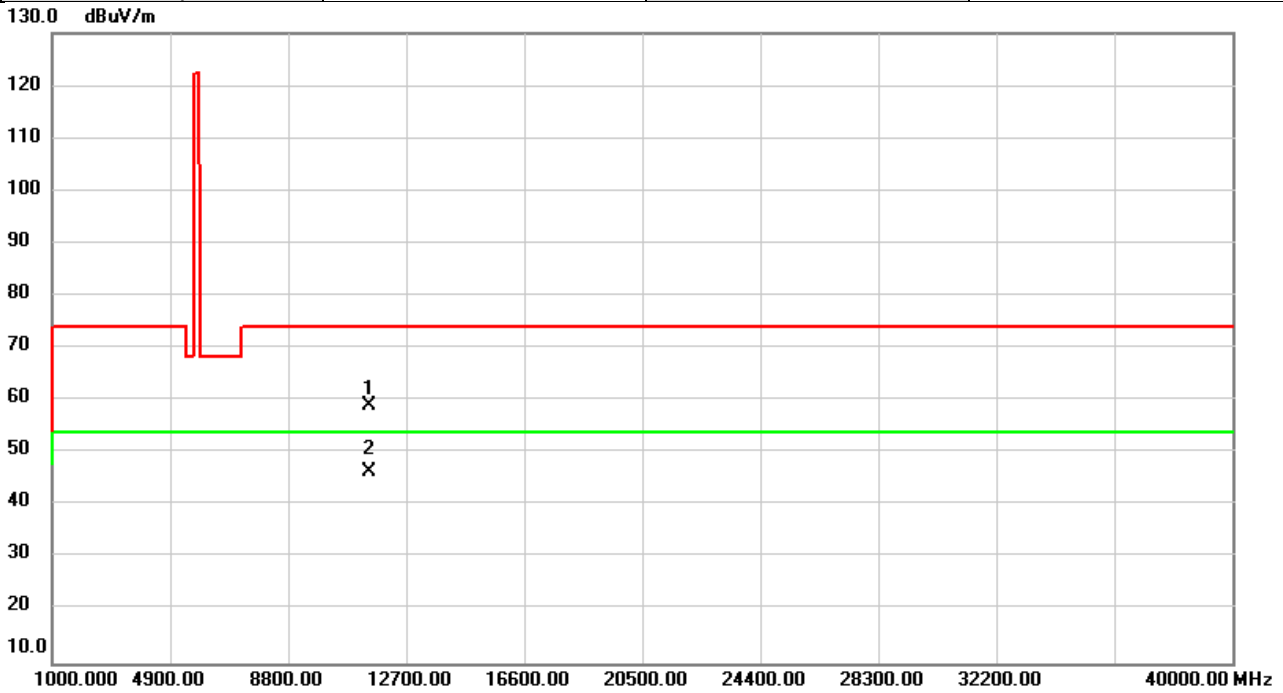


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11490.00	54.13	5.06	59.19	74.00	-14.81	peak	
2	*	11490.00	41.46	5.06	46.52	54.00	-7.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/25
Test Frequency	5745	Polarization	Horizontal
Temp	20°C	Hum.	53%

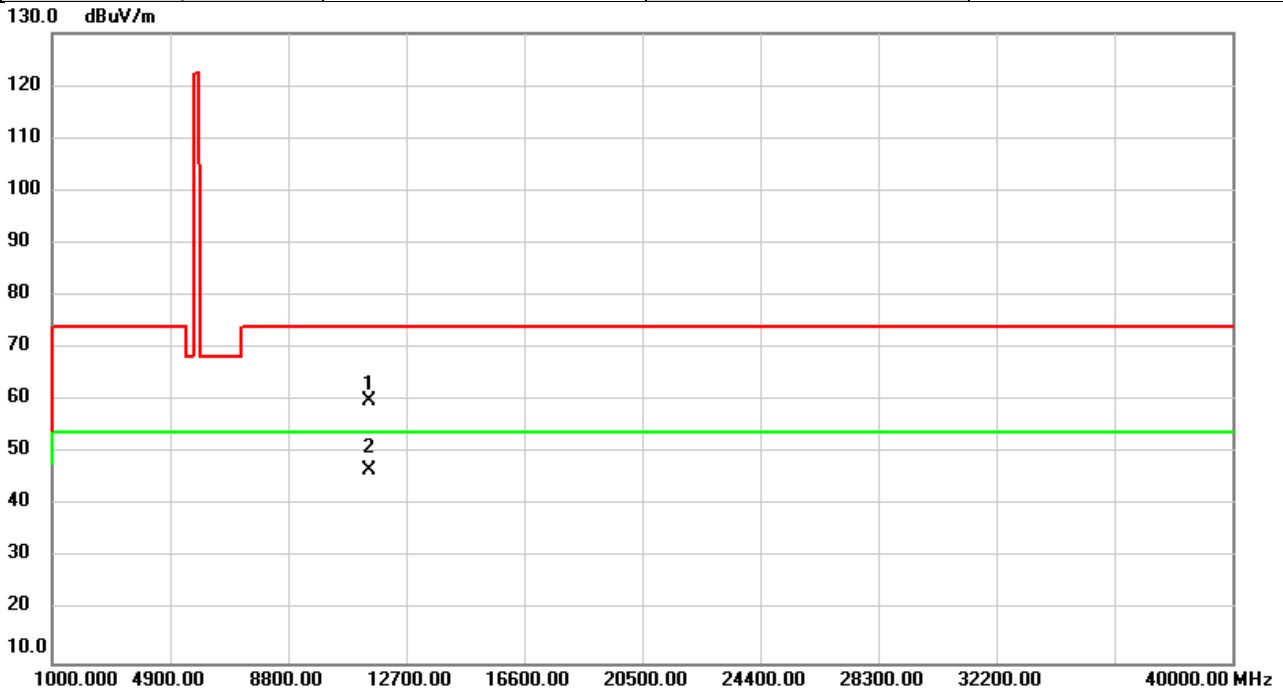


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11490.00	54.89	5.06	59.95	74.00	-14.05	peak	
2	*	11490.00	41.58	5.06	46.64	54.00	-7.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/25
Test Frequency	5785	Polarization	Vertical
Temp	20°C	Hum.	53%

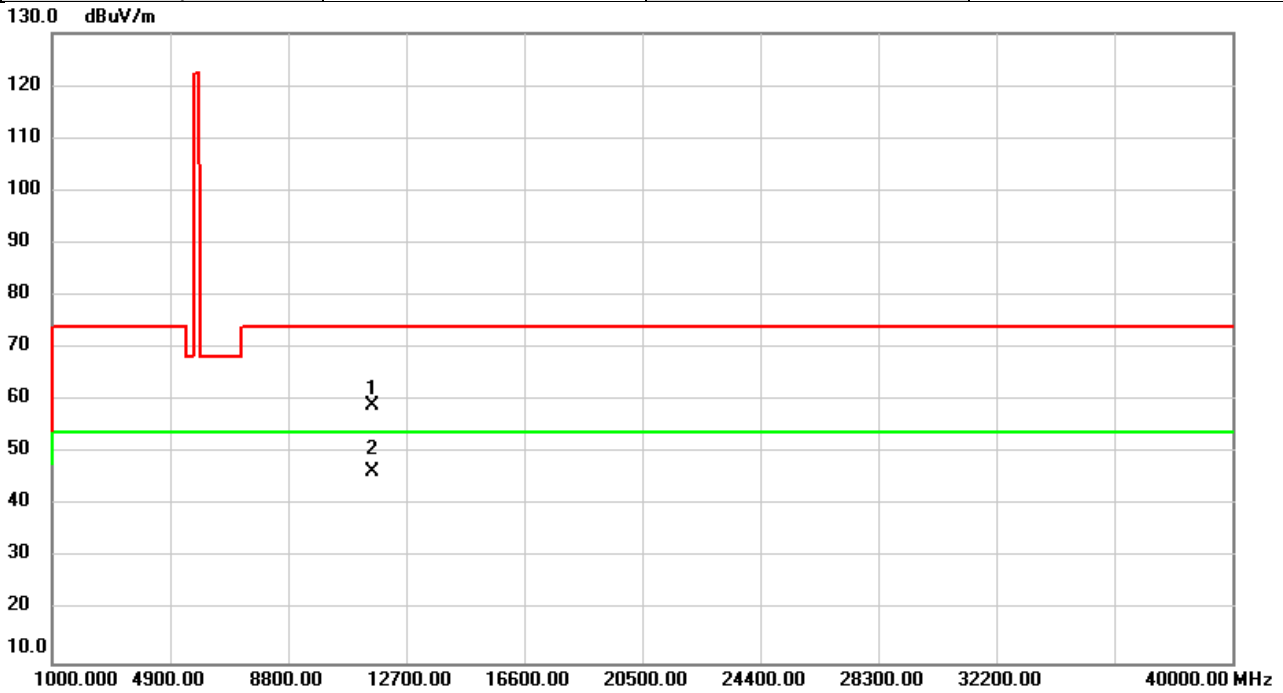


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.00	54.24	4.87	59.11	74.00	-14.89	peak	
2	*	11570.00	41.64	4.87	46.51	54.00	-7.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/25
Test Frequency	5785	Polarization	Horizontal
Temp	20°C	Hum.	53%

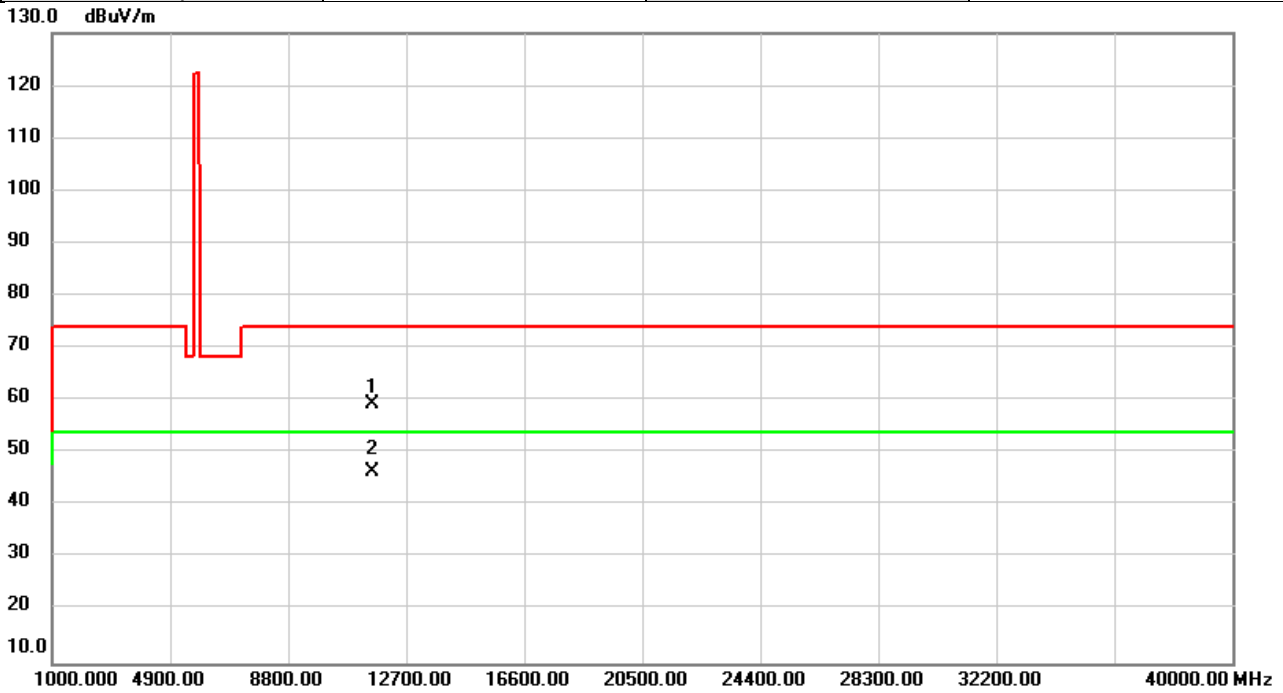


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.00	54.62	4.87	59.49	74.00	-14.51	peak	
2	*	11570.00	41.69	4.87	46.56	54.00	-7.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/25
Test Frequency	5825	Polarization	Vertical
Temp	20°C	Hum.	53%

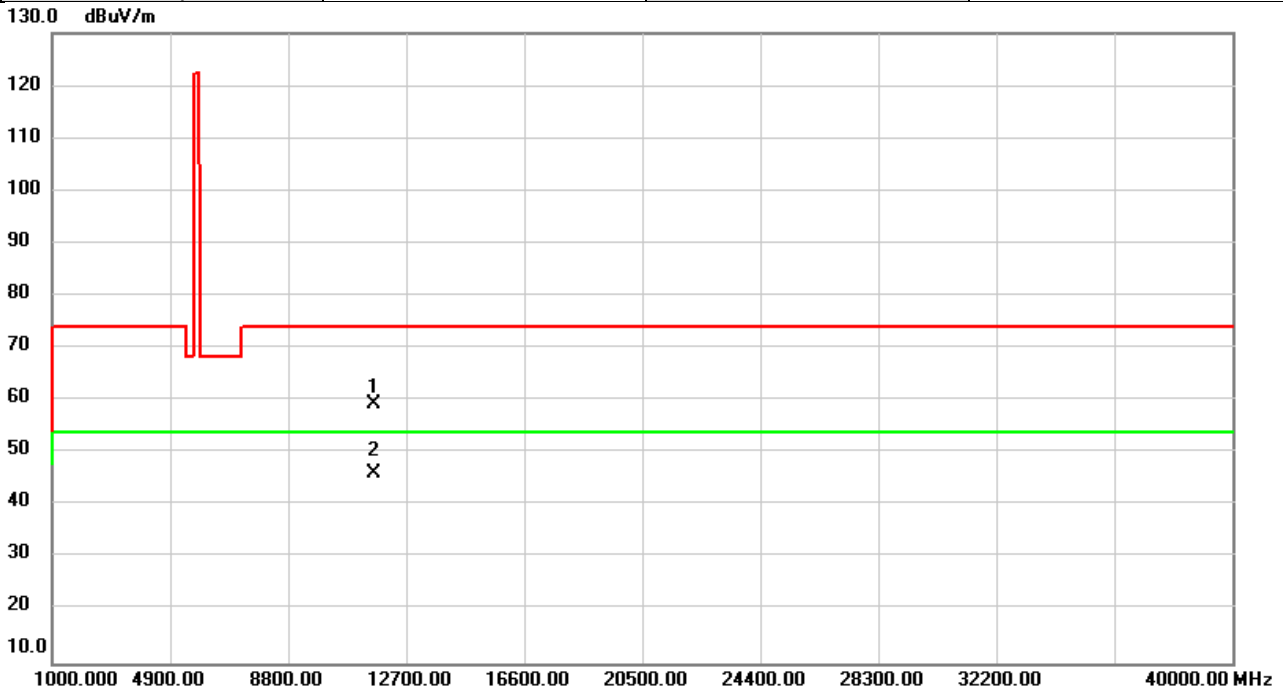


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11650.00	54.52	4.69	59.21	74.00	-14.79	peak	
2	*	11650.00	41.61	4.69	46.30	54.00	-7.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/6/25
Test Frequency	5825	Polarization	Horizontal
Temp	20°C	Hum.	53%

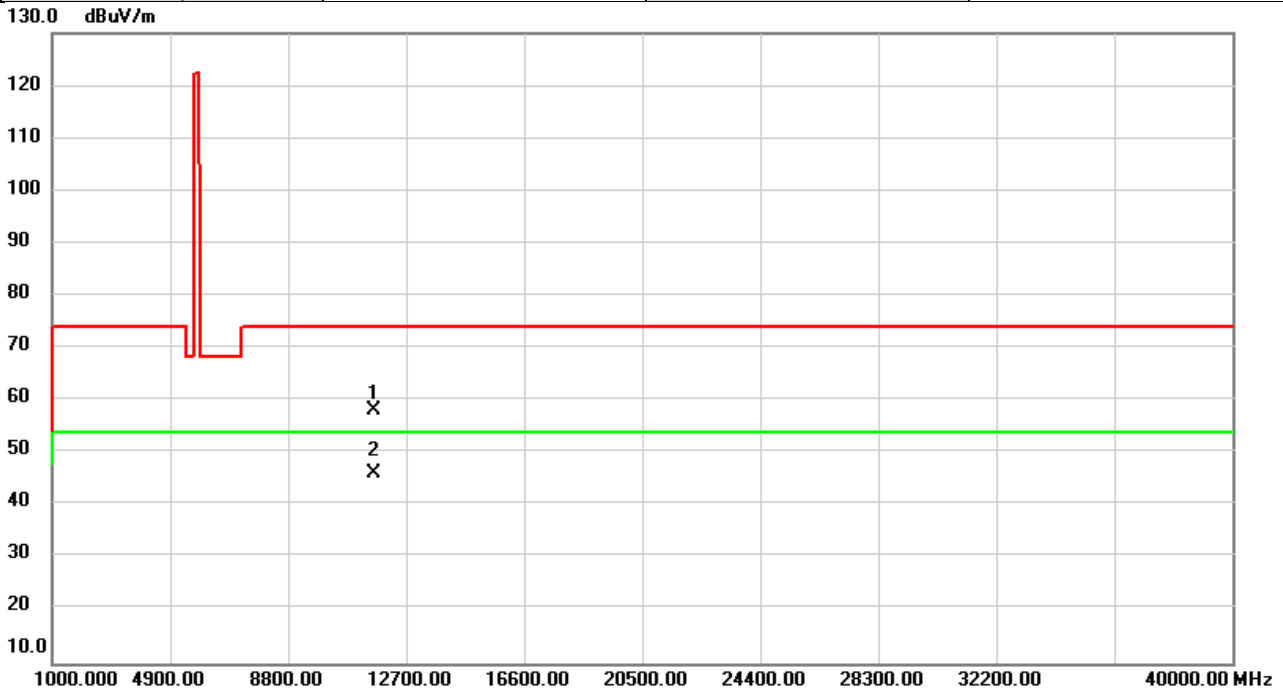


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11650.00	53.46	4.69	58.15	74.00	-15.85	peak	
2	*	11650.00	41.54	4.69	46.23	54.00	-7.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/25
Test Frequency	5190	Polarization	Vertical
Temp	20°C	Hum.	53%

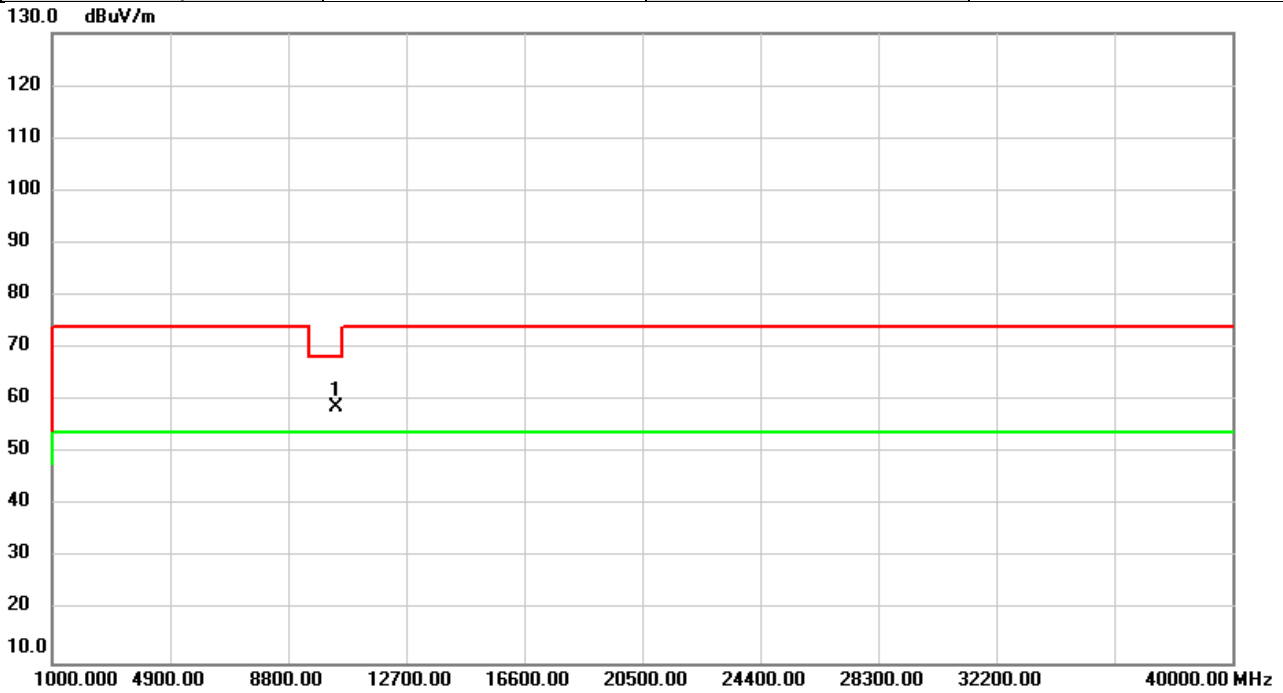


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	53.92	4.76	58.68	68.20	-9.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/25
Test Frequency	5190	Polarization	Horizontal
Temp	20°C	Hum.	53%

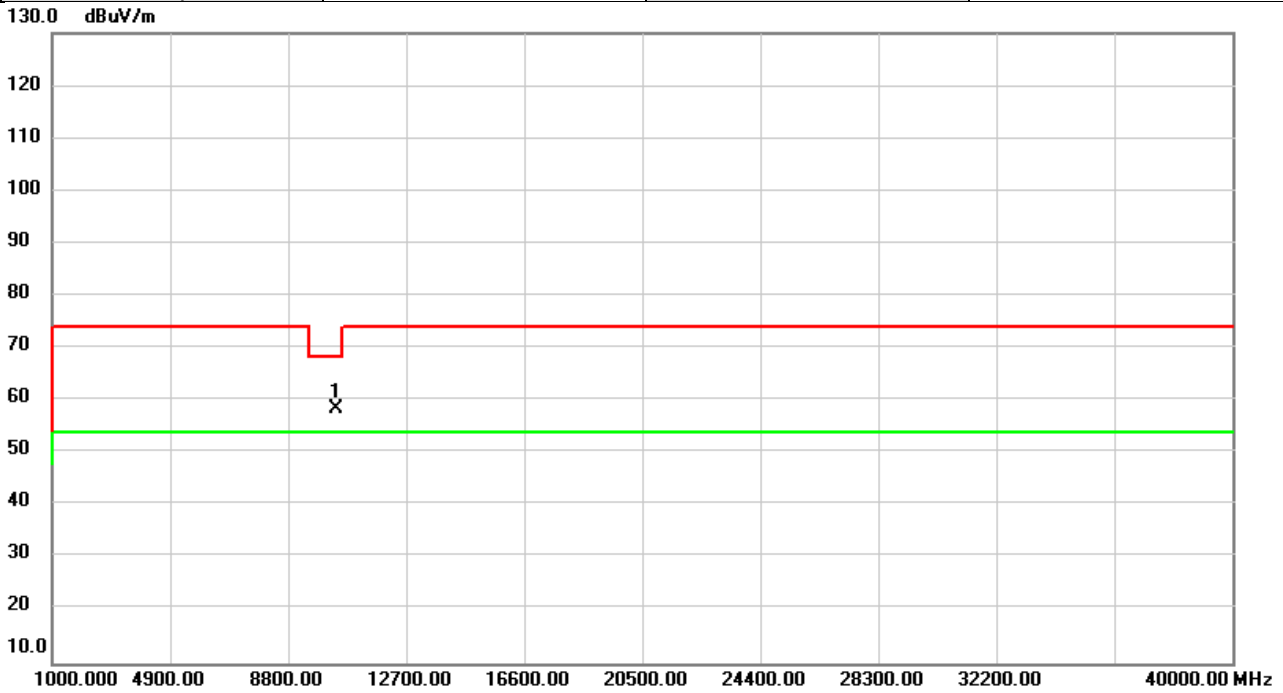


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	53.63	4.76	58.39	68.20	-9.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/25
Test Frequency	5230	Polarization	Vertical
Temp	20°C	Hum.	53%

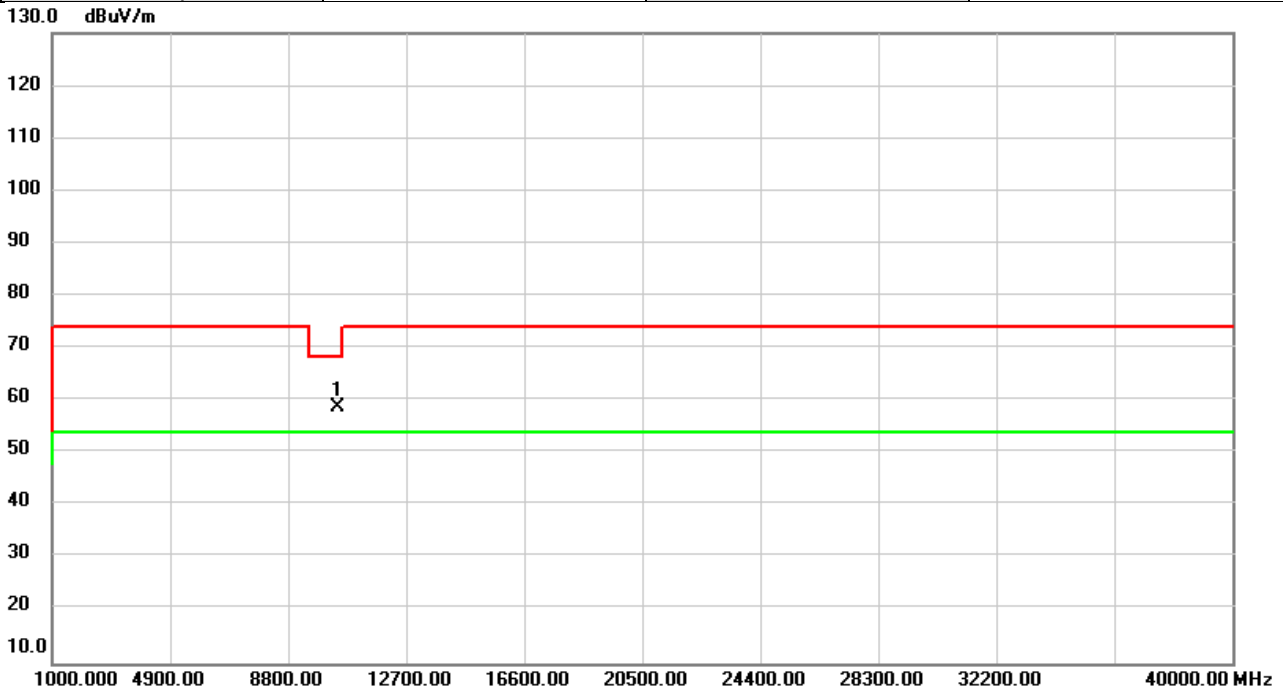


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	53.98	4.92	58.90	68.20	-9.30	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/25
Test Frequency	5230	Polarization	Horizontal
Temp	20°C	Hum.	53%

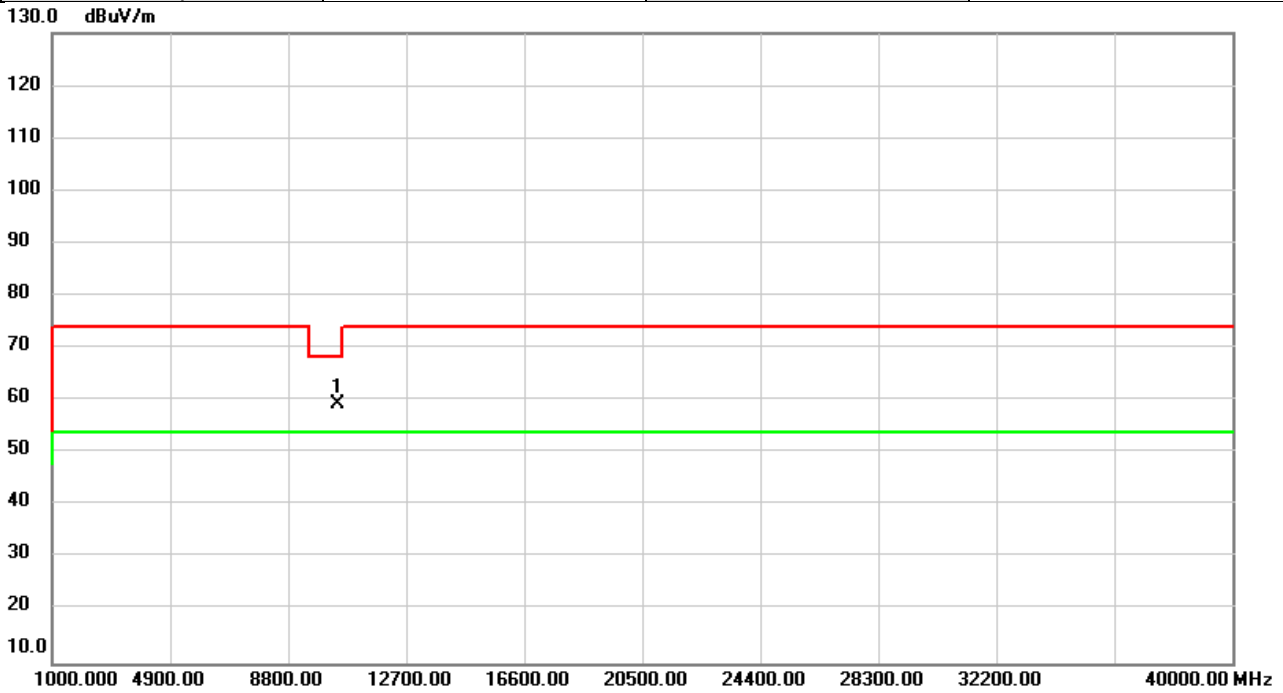


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	54.28	4.92	59.20	68.20	-9.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/1
Test Frequency	5270	Polarization	Vertical
Temp	22°C	Hum.	53%

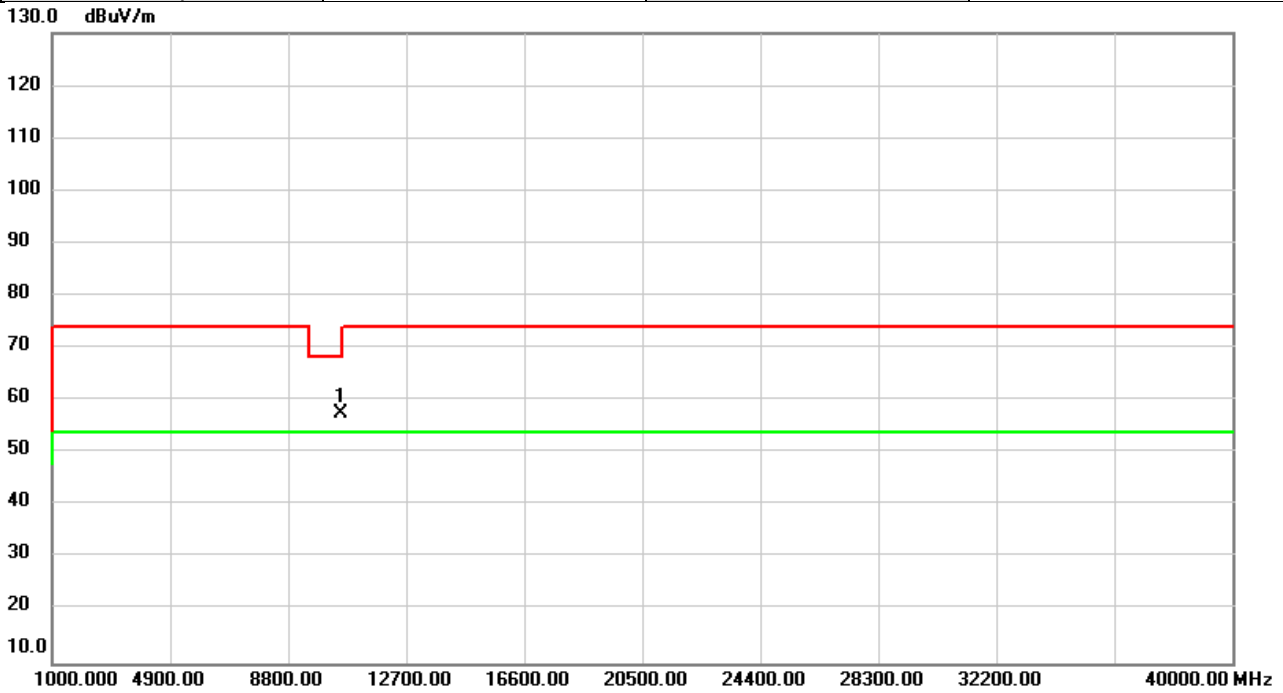


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	52.37	5.12	57.49	68.20	-10.71	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/1
Test Frequency	5270	Polarization	Horizontal
Temp	22°C	Hum.	53%

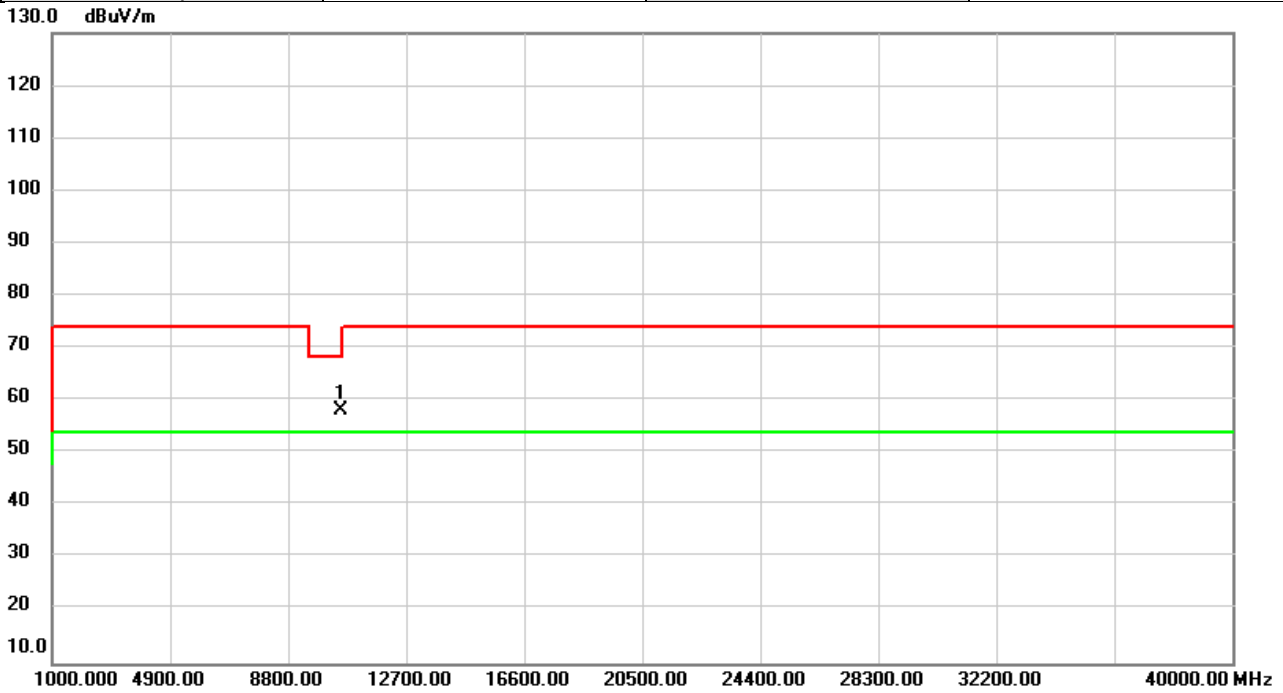


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	52.89	5.12	58.01	68.20	-10.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/25
Test Frequency	5310	Polarization	Vertical
Temp	20°C	Hum.	53%

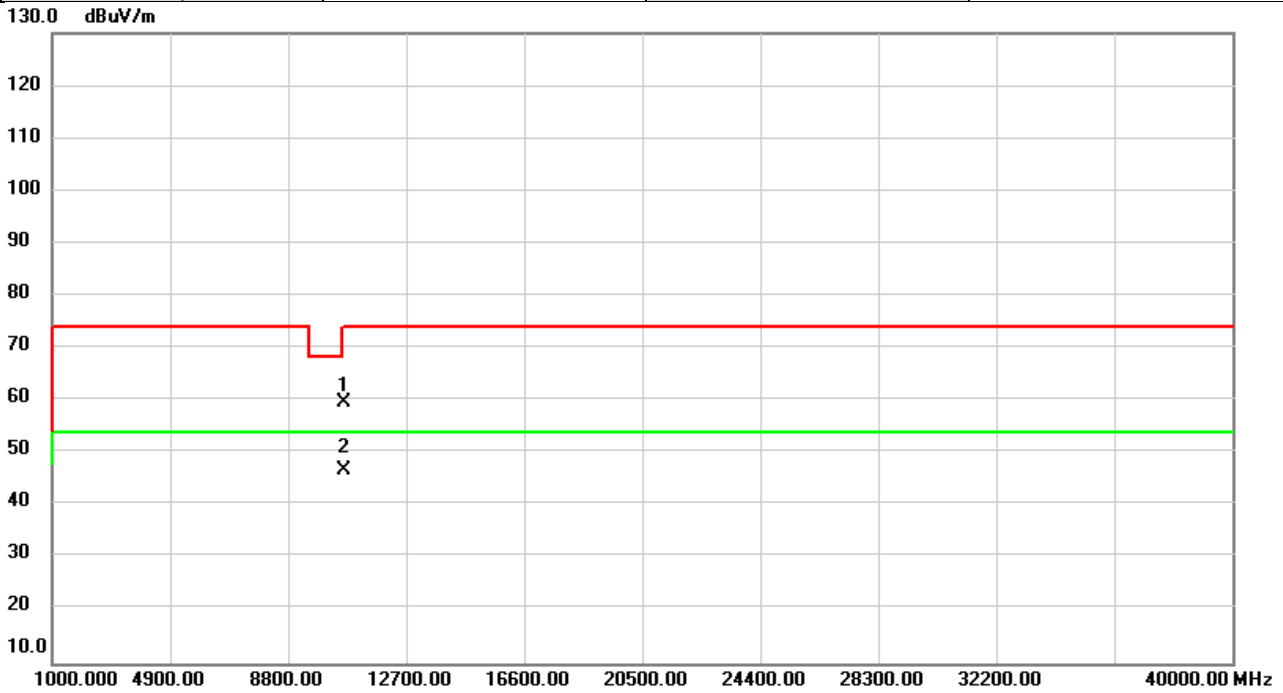


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10620.00	54.16	5.37	59.53	74.00	-14.47	peak	
2	*	10620.00	41.48	5.37	46.85	54.00	-7.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/25
Test Frequency	5310	Polarization	Horizontal
Temp	20°C	Hum.	53%

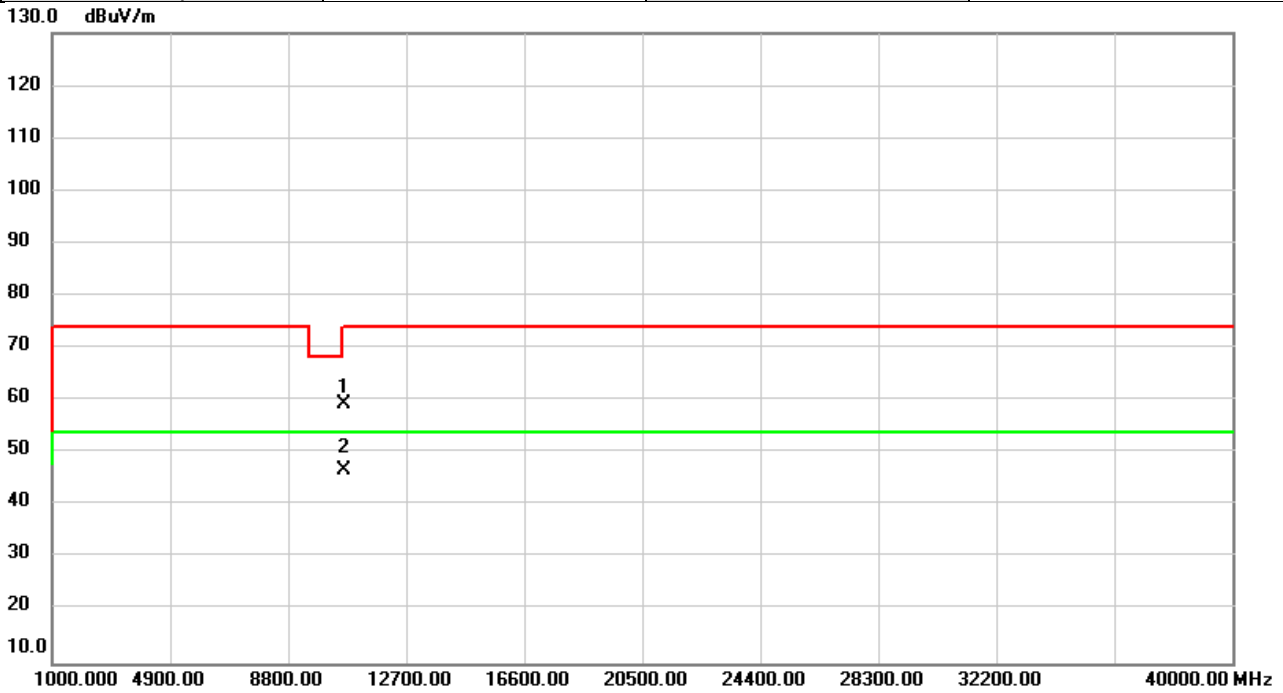


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10620.00	53.99	5.37	59.36	74.00	-14.64	peak	
2	*	10620.00	41.42	5.37	46.79	54.00	-7.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/25
Test Frequency	5510	Polarization	Vertical
Temp	20°C	Hum.	53%

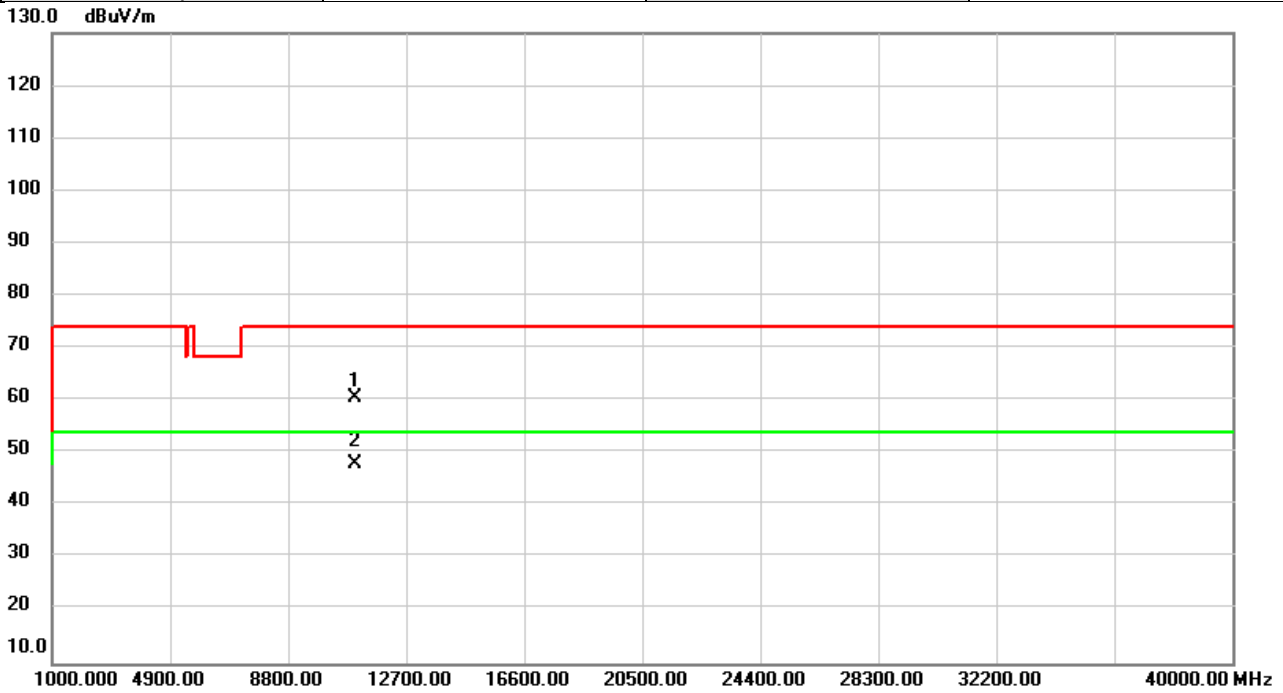


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11020.00	54.01	6.48	60.49	74.00	-13.51	peak	
2	*	11020.00	41.55	6.48	48.03	54.00	-5.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/25
Test Frequency	5510	Polarization	Horizontal
Temp	20°C	Hum.	53%

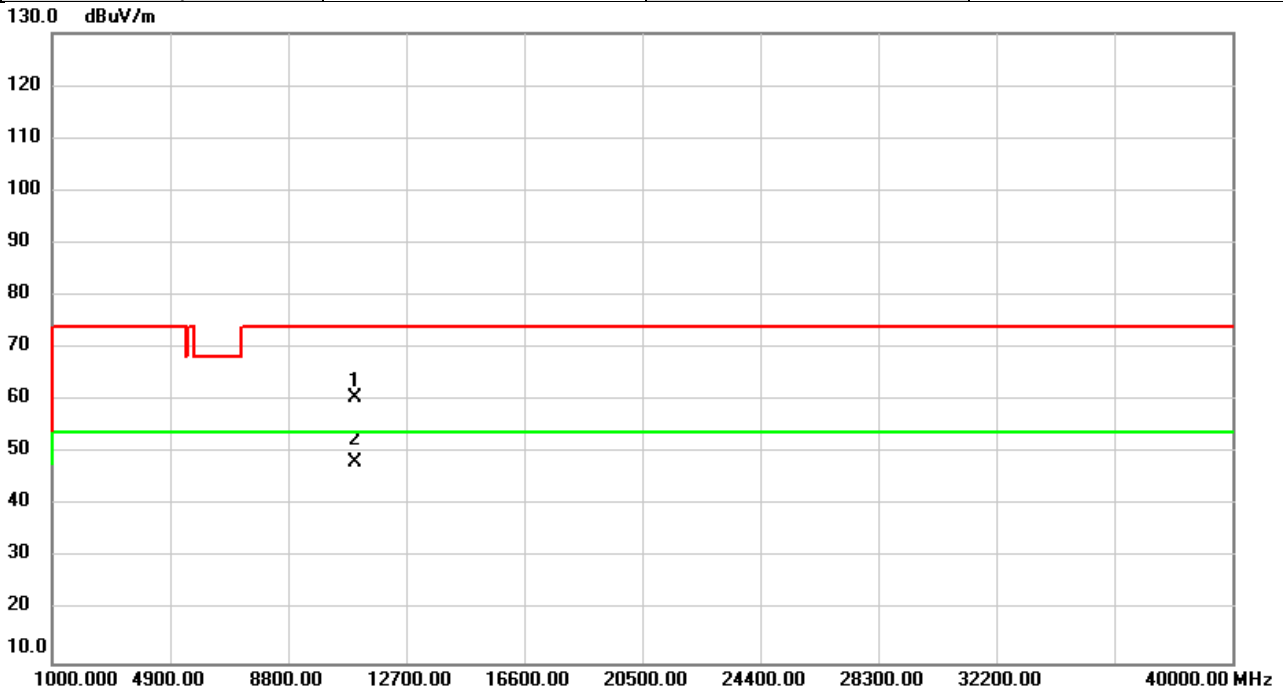


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11020.00	54.21	6.48	60.69	74.00	-13.31	peak	
2	*	11020.00	41.76	6.48	48.24	54.00	-5.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/1
Test Frequency	5550	Polarization	Vertical
Temp	22°C	Hum.	53%

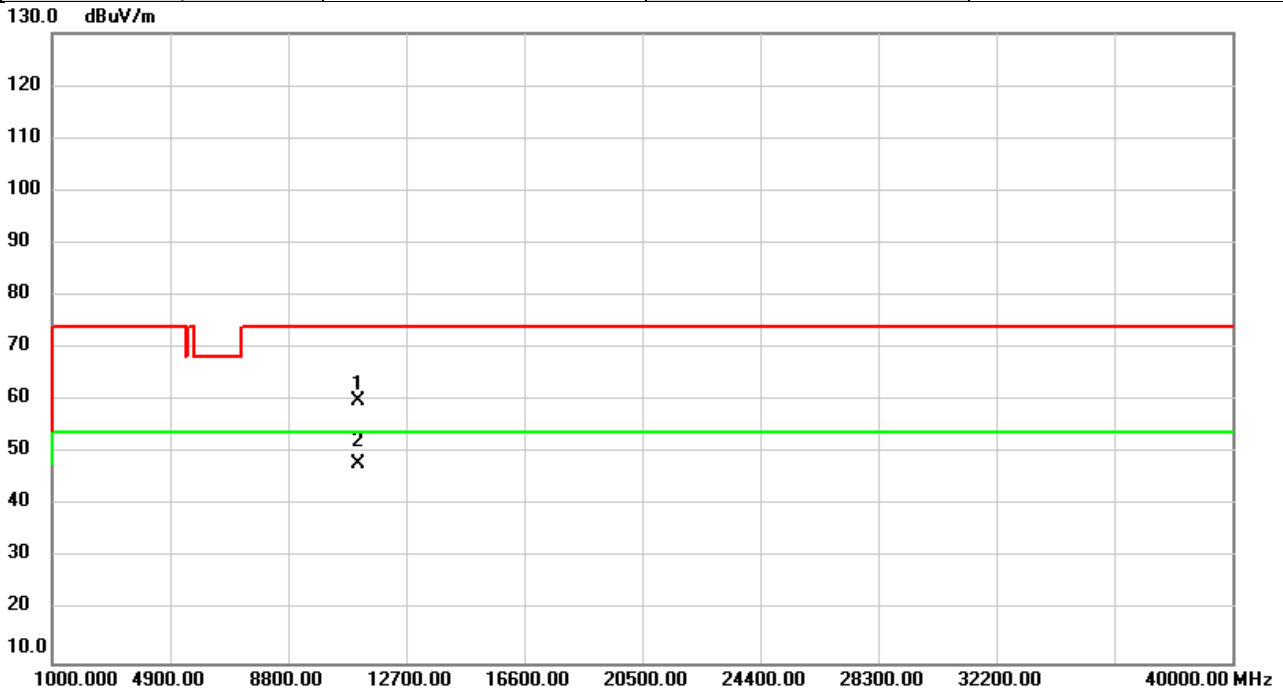


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11100.00	53.58	6.24	59.82	74.00	-14.18	peak	
2	*	11100.00	41.77	6.24	48.01	54.00	-5.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/1
Test Frequency	5550	Polarization	Horizontal
Temp	22°C	Hum.	53%

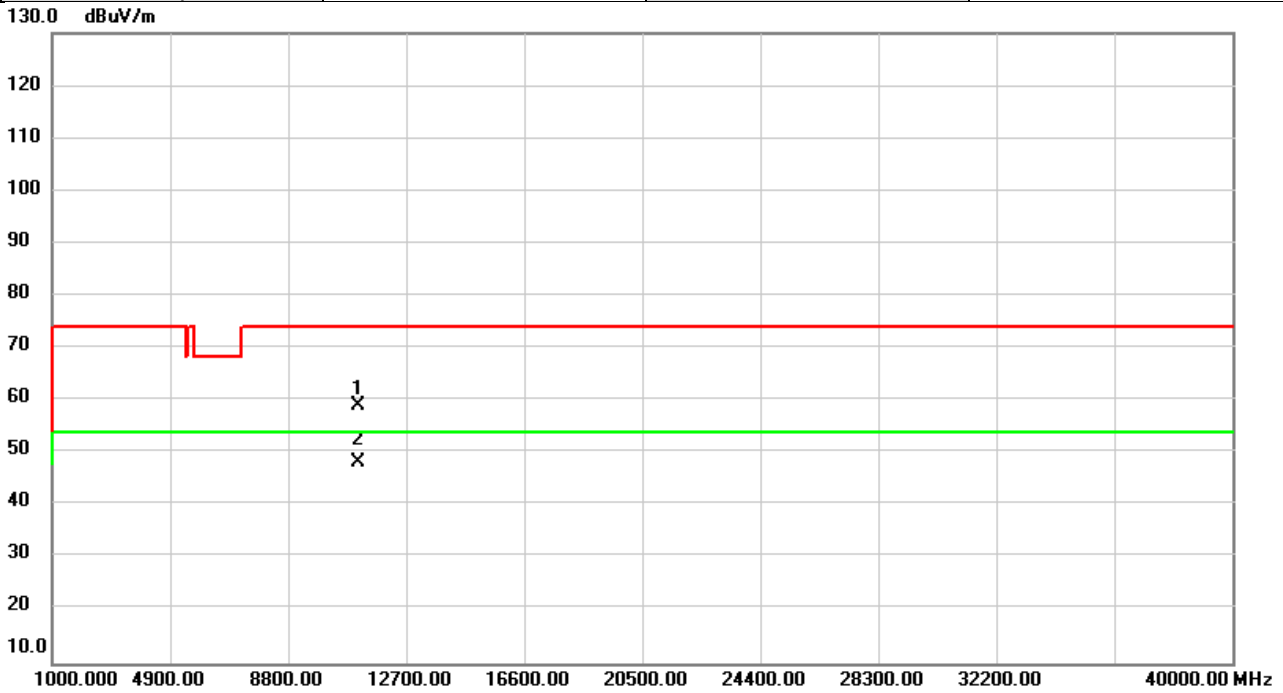


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11100.00	52.84	6.24	59.08	74.00	-14.92	peak	
2	*	11100.00	42.04	6.24	48.28	54.00	-5.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/25
Test Frequency	5670	Polarization	Vertical
Temp	20°C	Hum.	53%

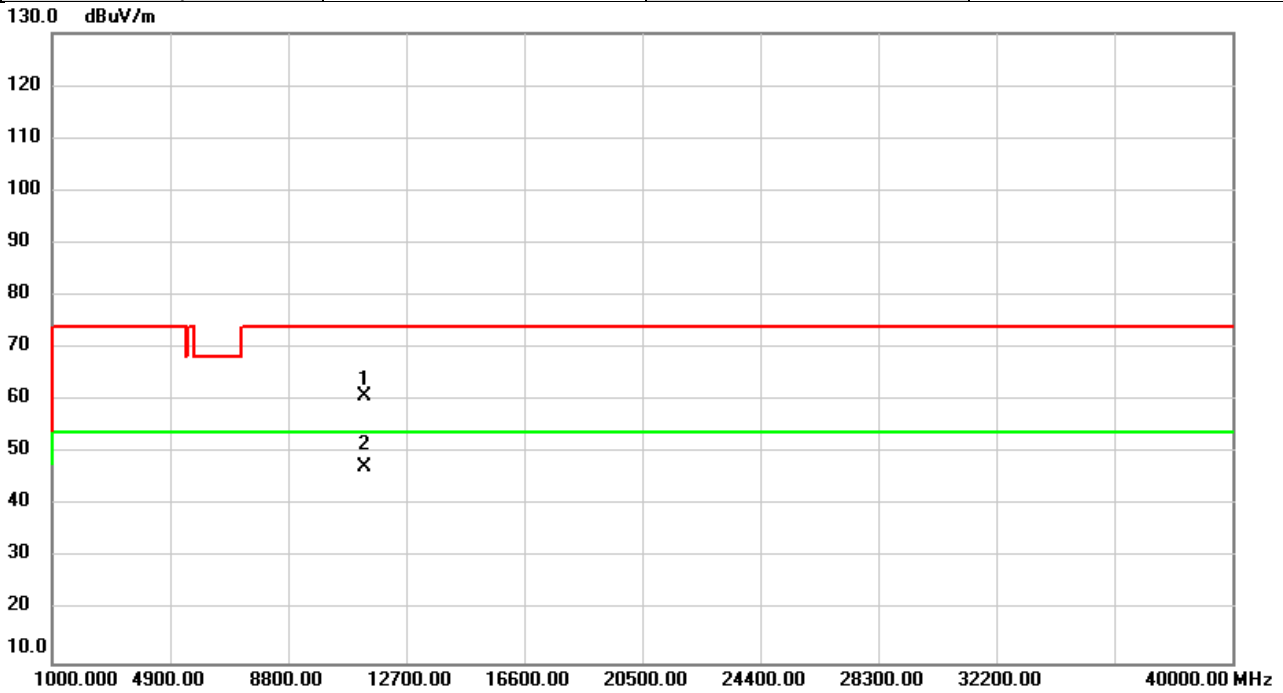


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11340.00	55.38	5.52	60.90	74.00	-13.10	peak	
2	*	11340.00	41.70	5.52	47.22	54.00	-6.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/25
Test Frequency	5670	Polarization	Horizontal
Temp	20°C	Hum.	53%

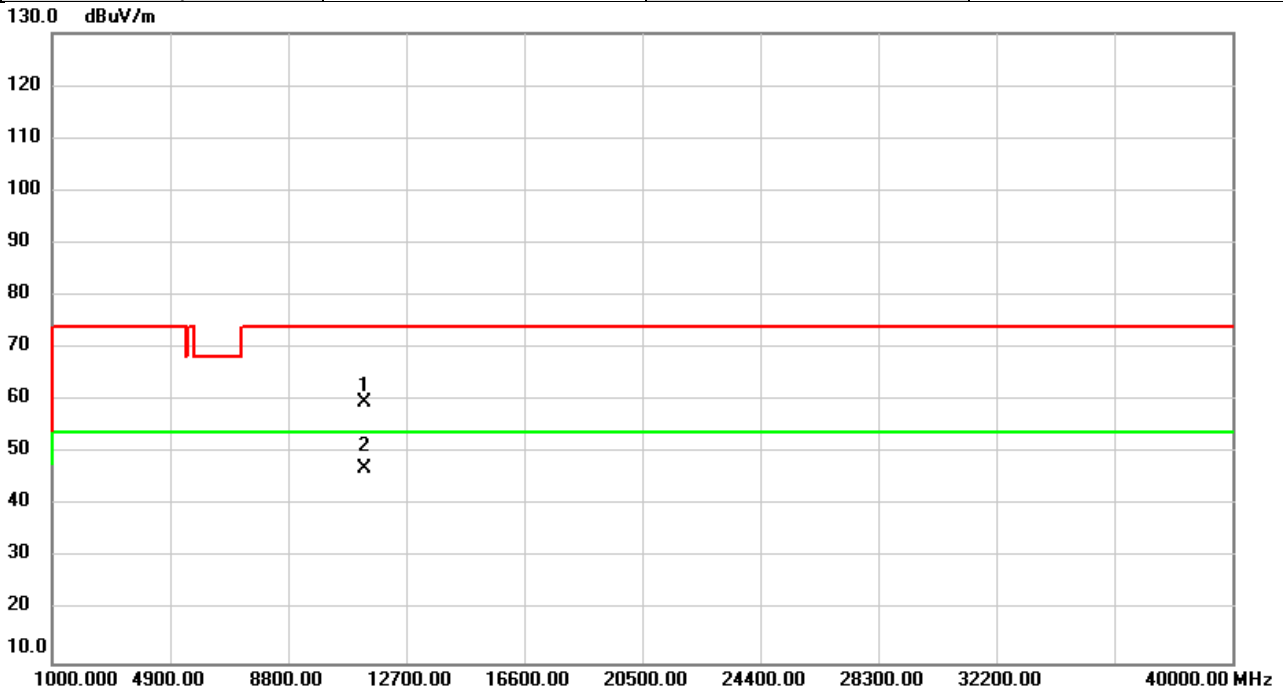


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11340.00	54.20	5.52	59.72	74.00	-14.28	peak	
2	*	11340.00	41.65	5.52	47.17	54.00	-6.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/25
Test Frequency	5755	Polarization	Vertical
Temp	20°C	Hum.	53%

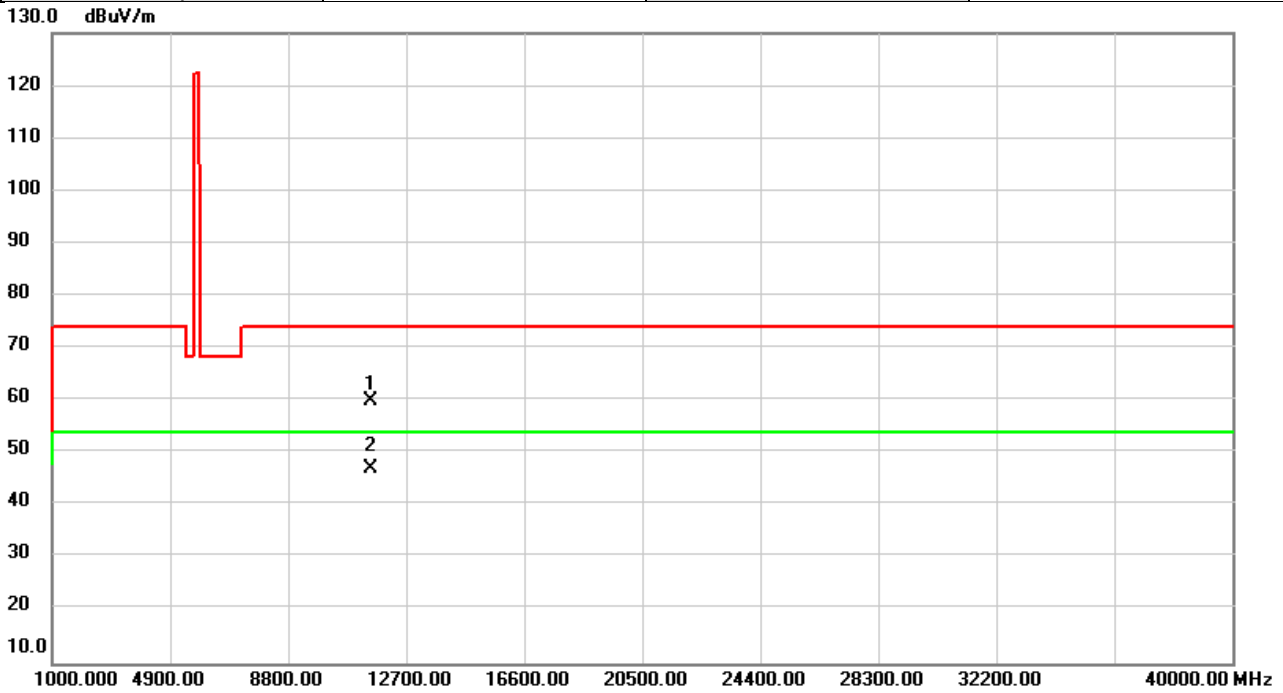


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11510.00	55.00	5.01	60.01	74.00	-13.99	peak	
2	*	11510.00	42.05	5.01	47.06	54.00	-6.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/25
Test Frequency	5755	Polarization	Horizontal
Temp	20°C	Hum.	53%

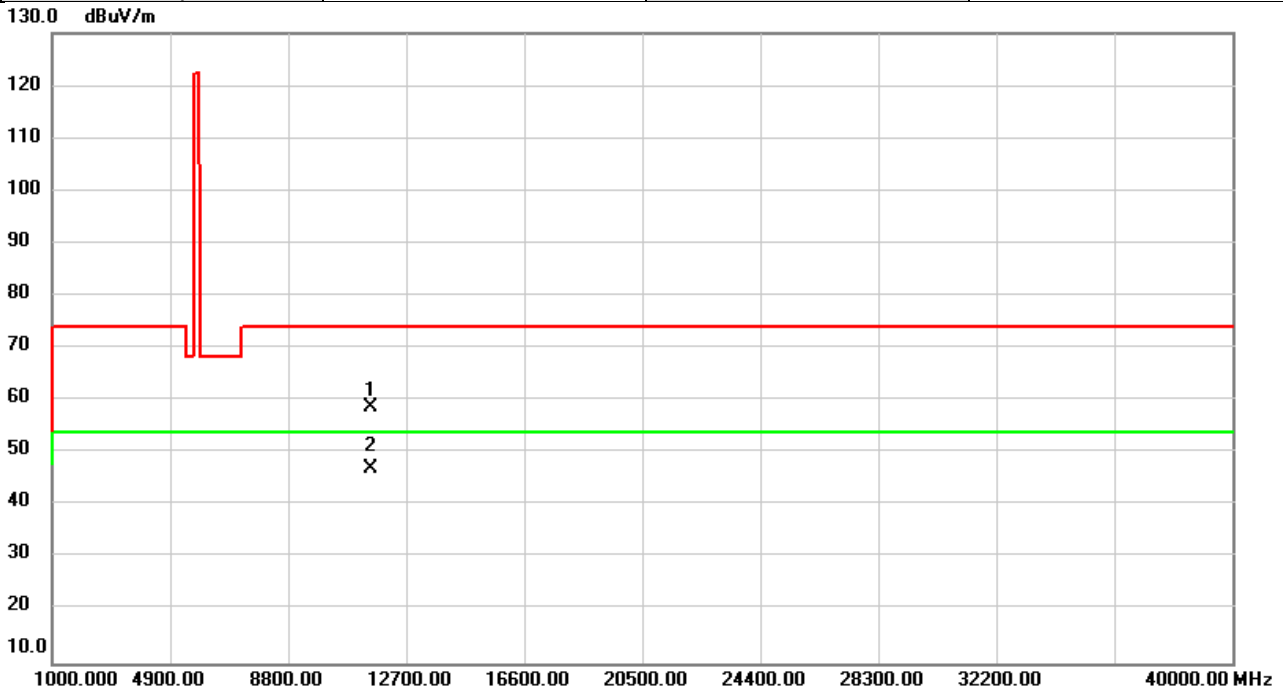


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11510.00	53.84	5.01	58.85	74.00	-15.15	peak	
2	*	11510.00	42.07	5.01	47.08	54.00	-6.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/25
Test Frequency	5795	Polarization	Vertical
Temp	20°C	Hum.	53%

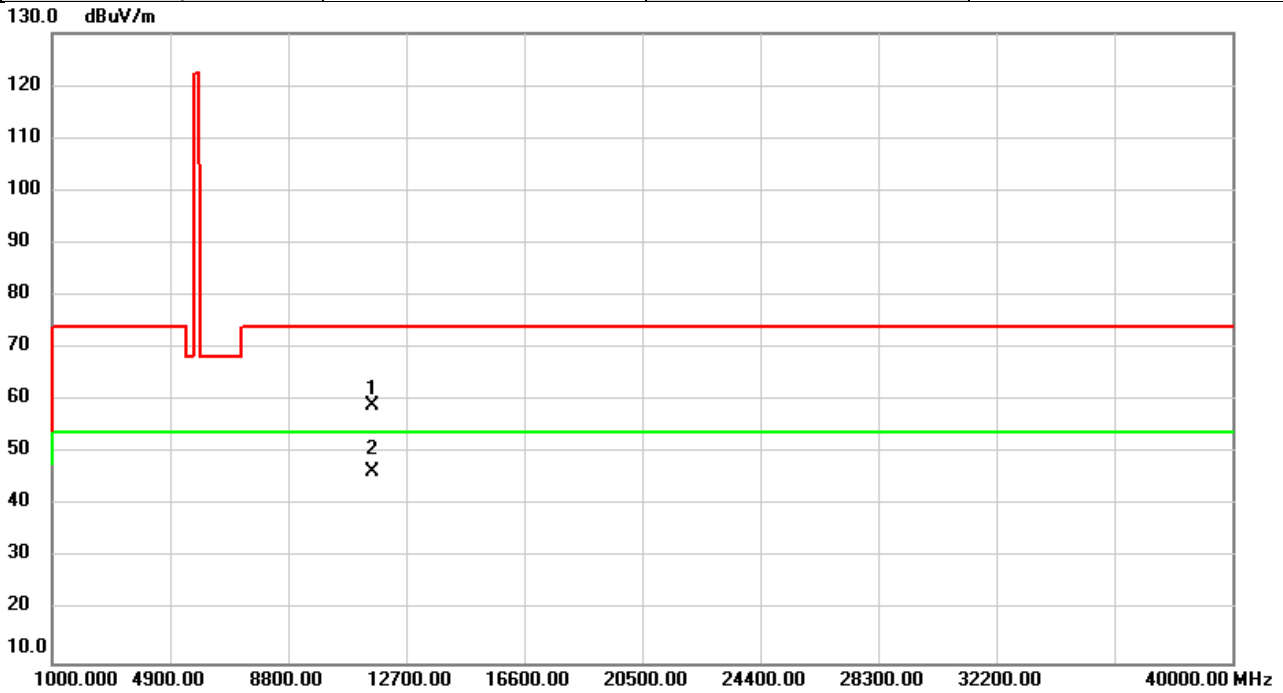


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11590.00	54.27	4.83	59.10	74.00	-14.90	peak	
2	*	11590.00	41.51	4.83	46.34	54.00	-7.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/6/25
Test Frequency	5795	Polarization	Horizontal
Temp	20°C	Hum.	53%

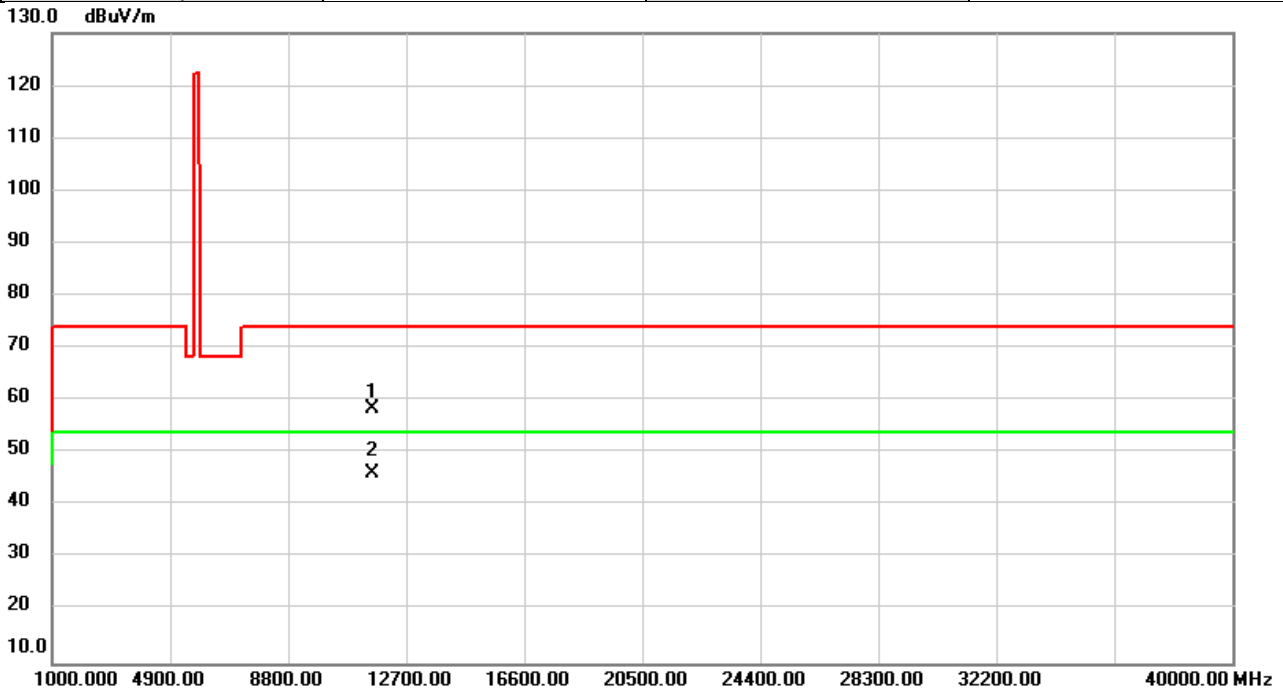


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11590.00	53.70	4.83	58.53	74.00	-15.47	peak	
2	*	11590.00	41.43	4.83	46.26	54.00	-7.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/6/25
Test Frequency	5210	Polarization	Vertical
Temp	20°C	Hum.	53%

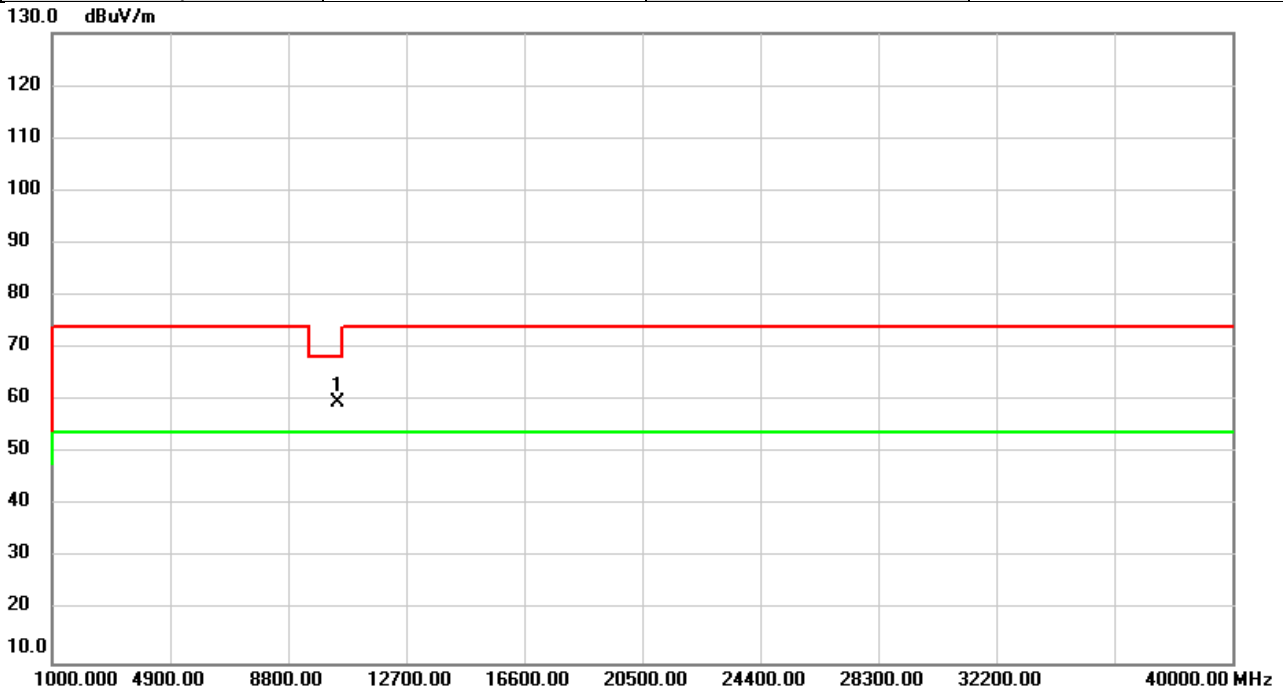


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	54.72	4.84	59.56	68.20	-8.64	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/6/25
Test Frequency	5210	Polarization	Horizontal
Temp	20°C	Hum.	53%

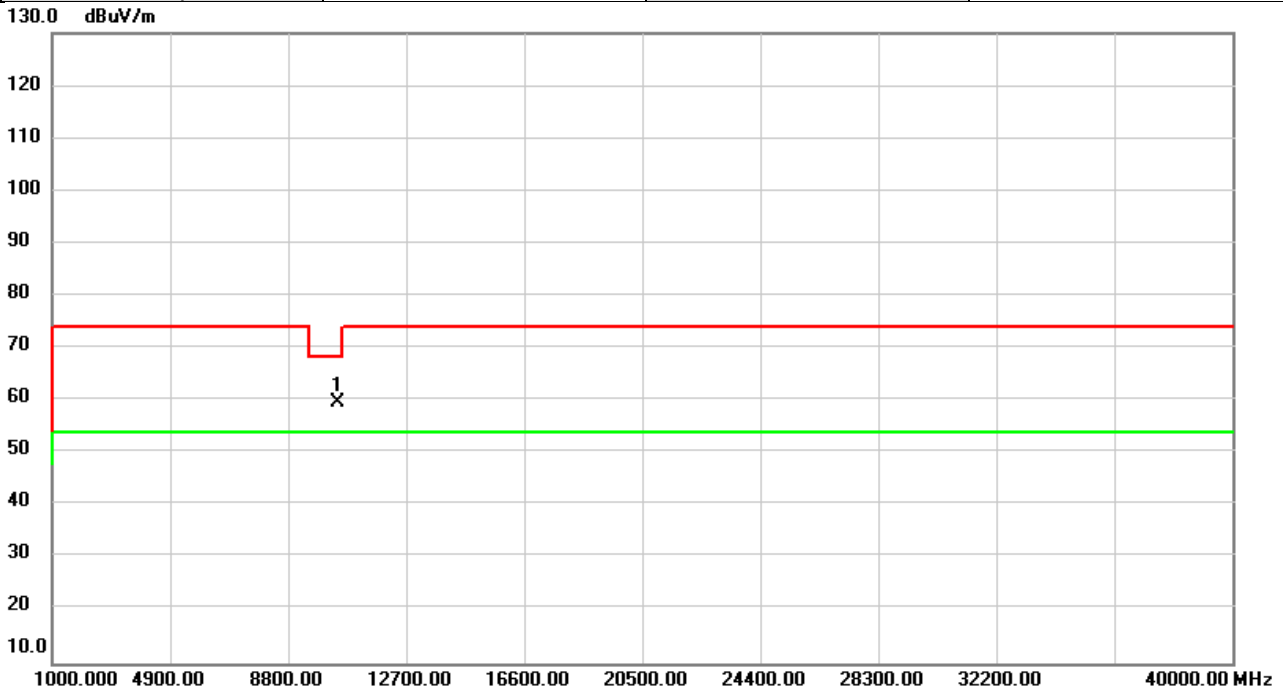


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	54.68	4.84	59.52	68.20	-8.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/6/25
Test Frequency	5290	Polarization	Vertical
Temp	20°C	Hum.	53%

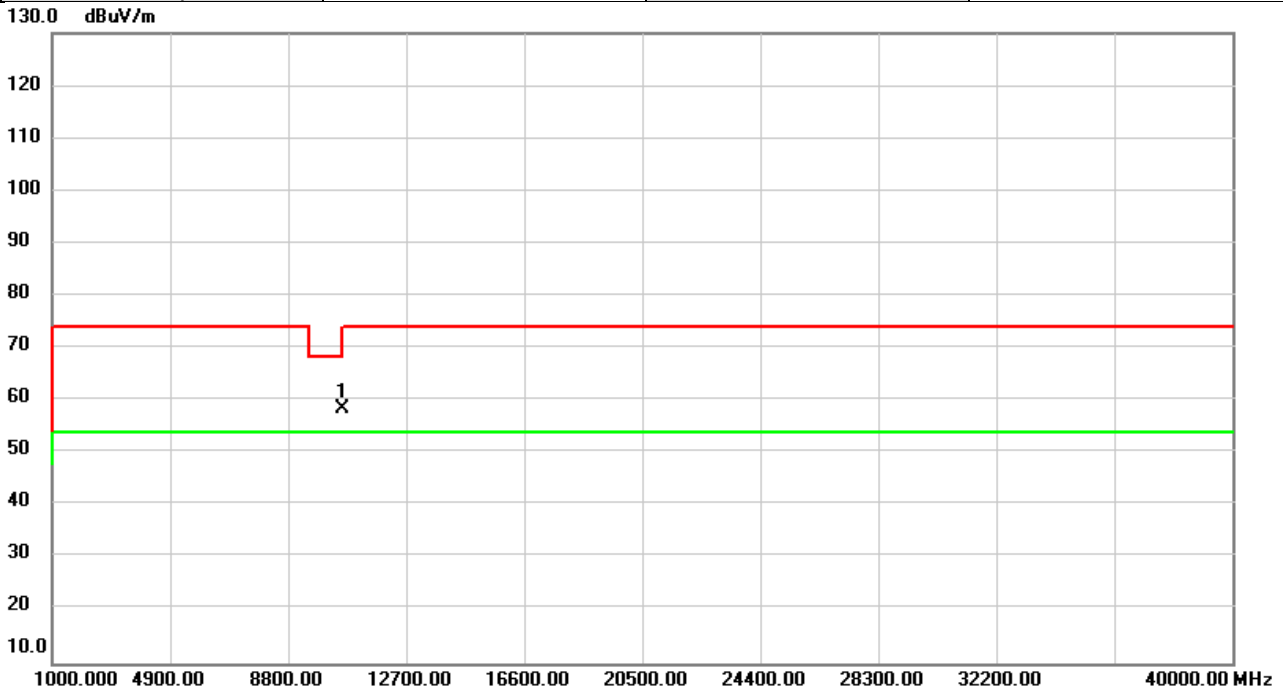


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	53.19	5.25	58.44	68.20	-9.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/6/25
Test Frequency	5290	Polarization	Horizontal
Temp	20°C	Hum.	53%

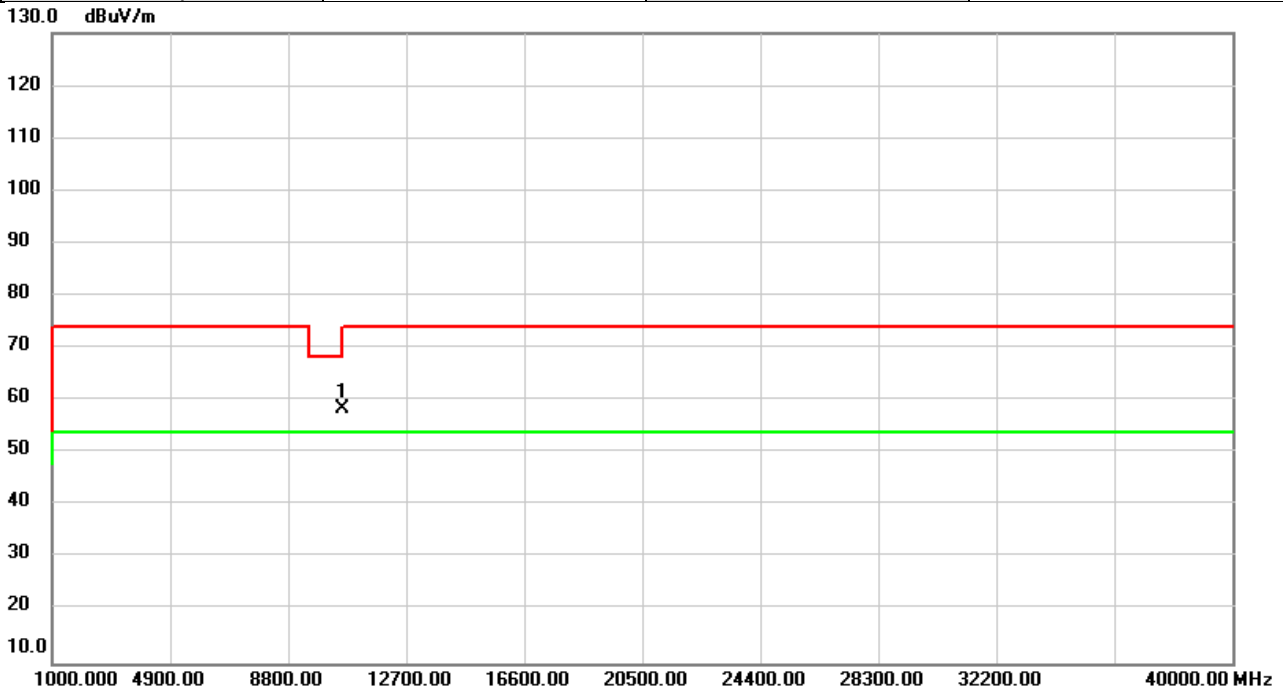


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	53.30	5.25	58.55	68.20	-9.65	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/6/25
Test Frequency	5530	Polarization	Vertical
Temp	20°C	Hum.	53%

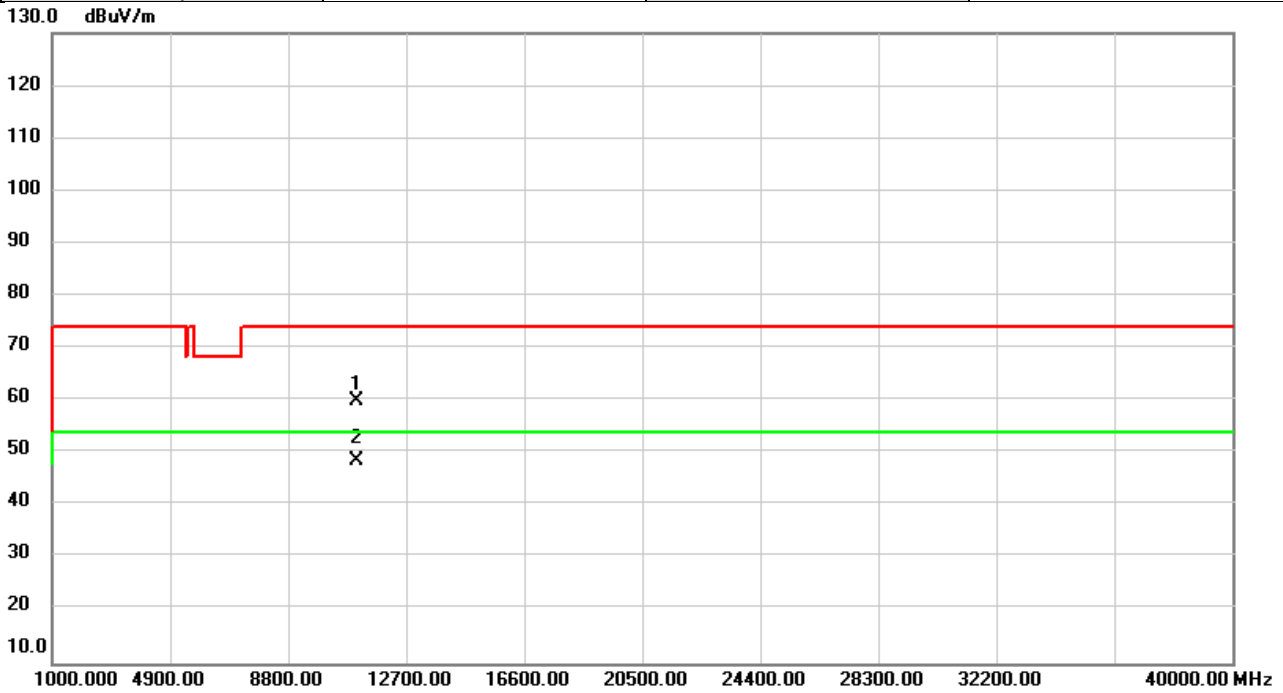


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11060.00	53.60	6.35	59.95	74.00	-14.05	peak	
2	*	11060.00	42.20	6.35	48.55	54.00	-5.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/6/25
Test Frequency	5530	Polarization	Horizontal
Temp	20°C	Hum.	53%

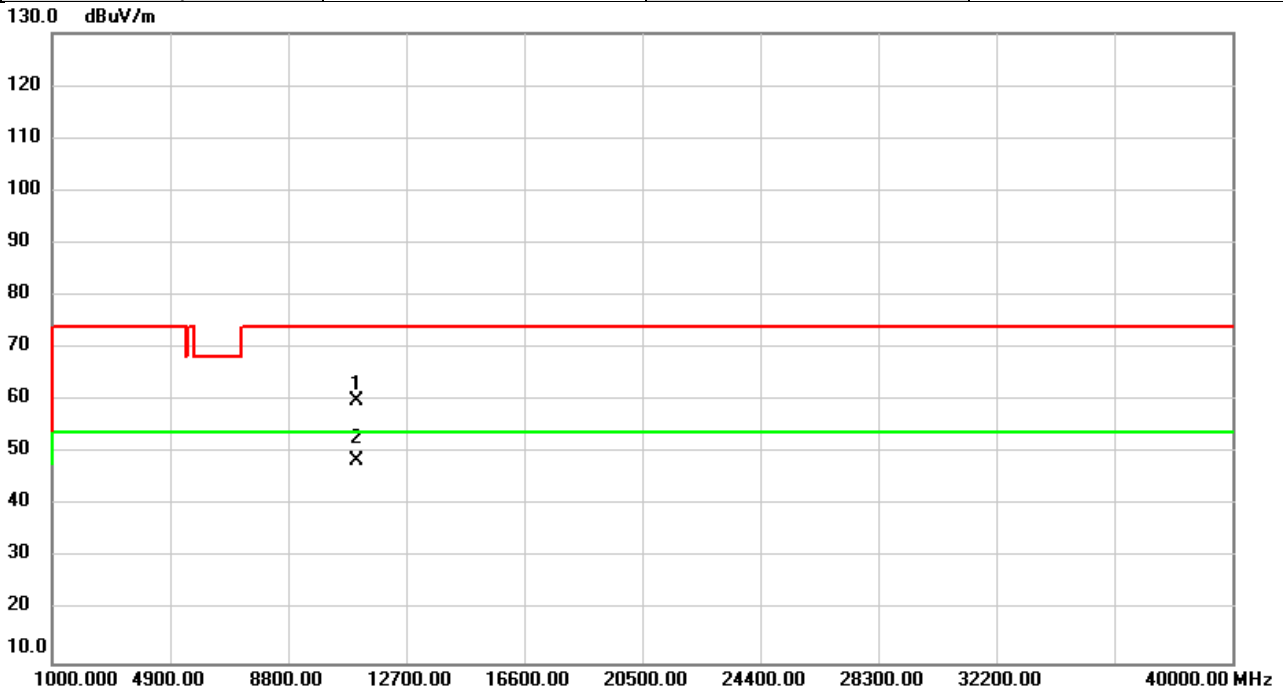


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11060.00	53.65	6.35	60.00	74.00	-14.00	peak	
2	*	11060.00	42.18	6.35	48.53	54.00	-5.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/7/1
Test Frequency	5610	Polarization	Vertical
Temp	22°C	Hum.	53%

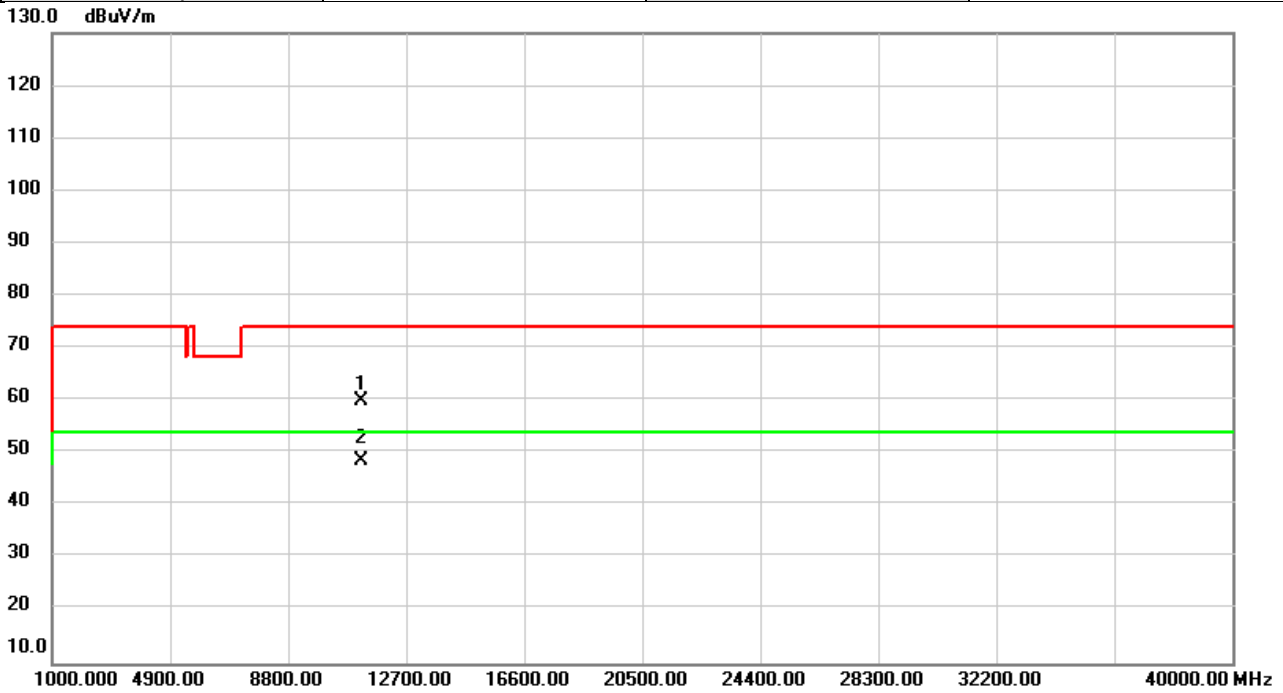


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11220.00	53.96	5.87	59.83	74.00	-14.17	peak	
2	*	11220.00	42.71	5.87	48.58	54.00	-5.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/7/1
Test Frequency	5610	Polarization	Horizontal
Temp	22°C	Hum.	53%

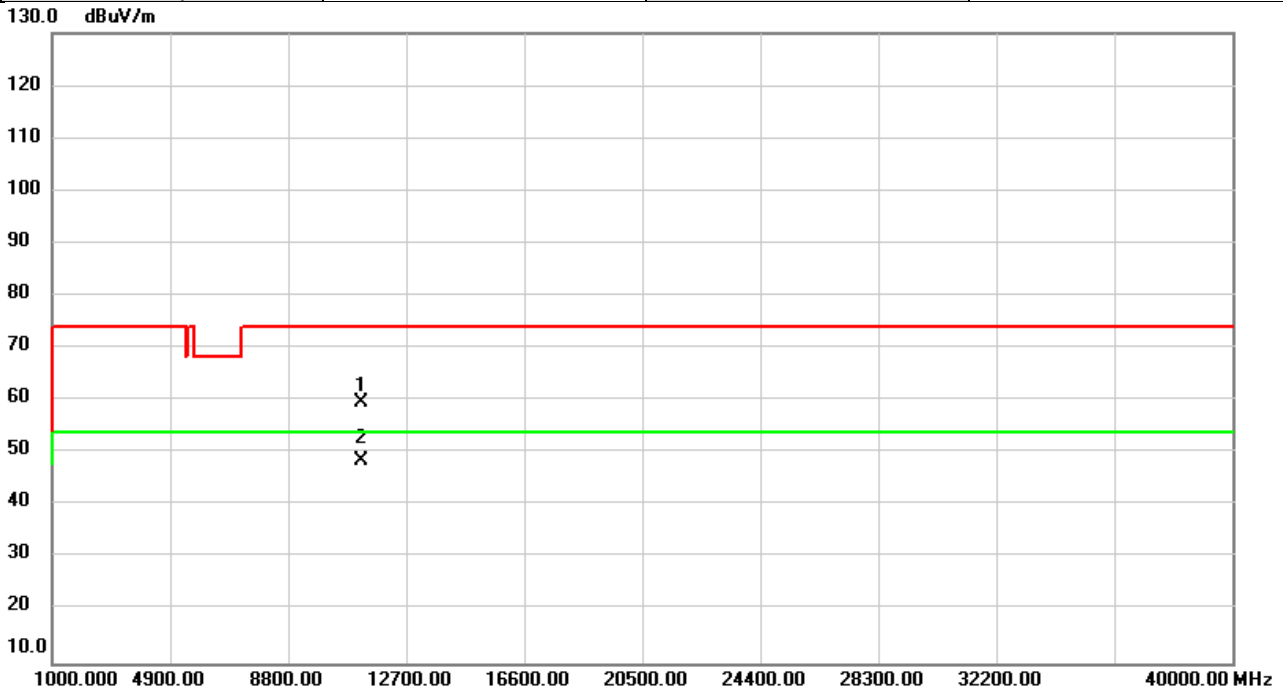


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11220.00	53.70	5.87	59.57	74.00	-14.43	peak	
2	*	11220.00	42.62	5.87	48.49	54.00	-5.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/6/25
Test Frequency	5775	Polarization	Vertical
Temp	20°C	Hum.	53%

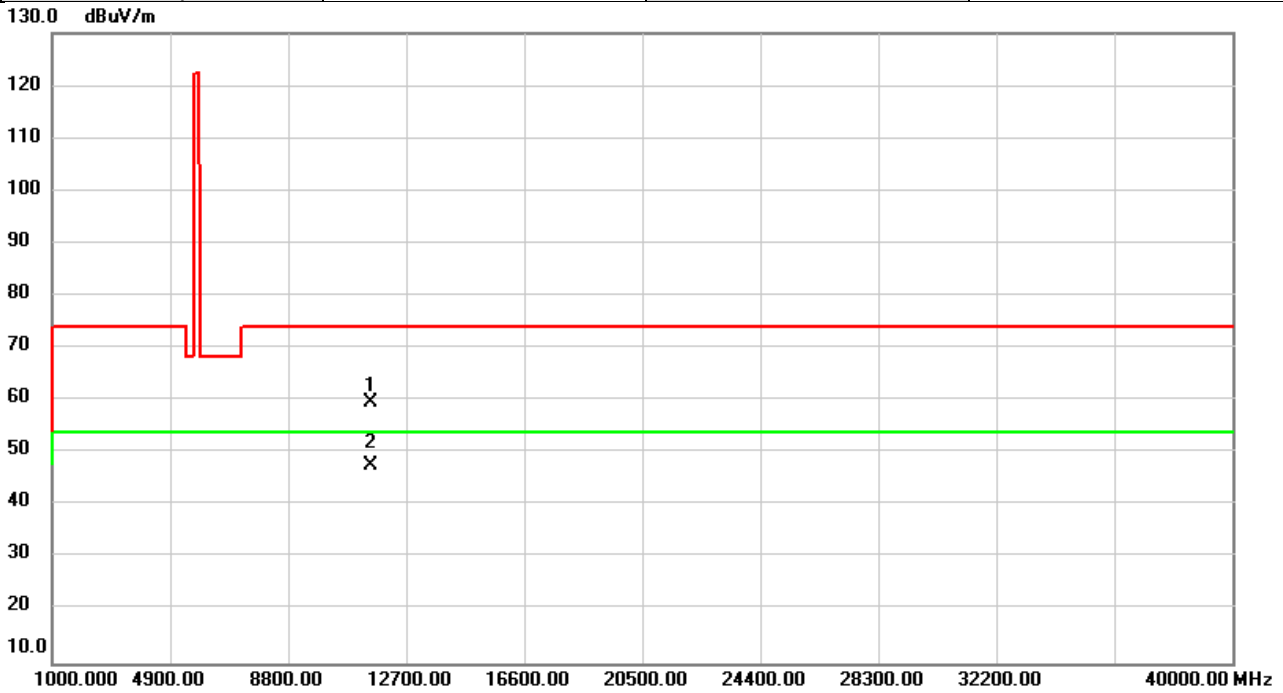


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11550.00	54.88	4.92	59.80	74.00	-14.20	peak	
2	*	11550.00	42.59	4.92	47.51	54.00	-6.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/6/25
Test Frequency	5775	Polarization	Horizontal
Temp	20°C	Hum.	53%

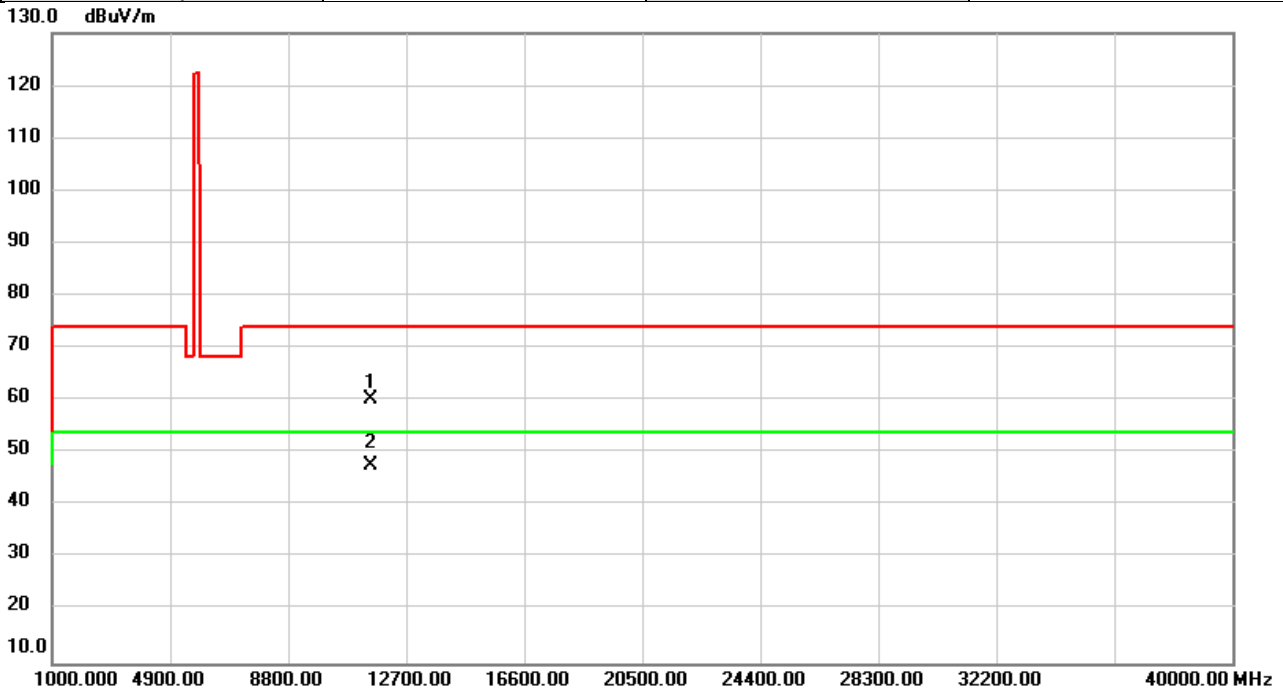


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11550.00	55.40	4.92	60.32	74.00	-13.68	peak	
2	*	11550.00	42.63	4.92	47.55	54.00	-6.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW160)	Test Date	2020/6/25
Test Frequency	5250	Polarization	Vertical
Temp	20°C	Hum.	53%

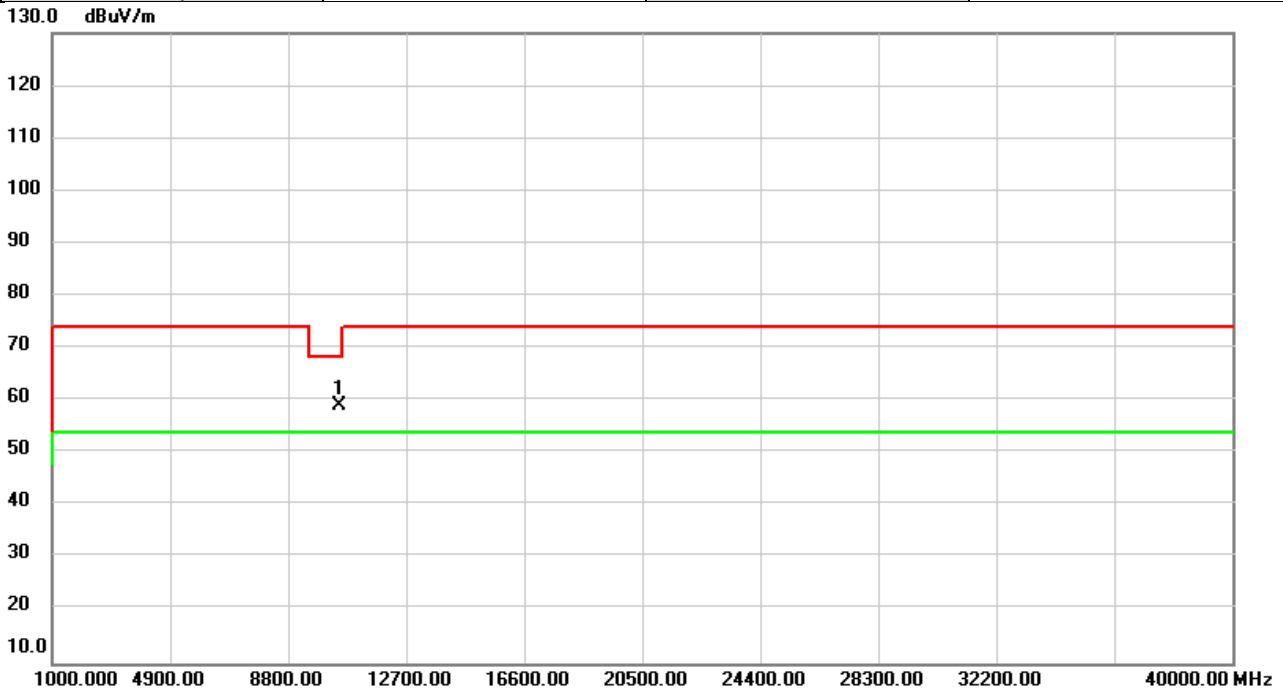


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10500.00	53.95	5.00	58.95	68.20	-9.25	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW160)	Test Date	2020/6/25
Test Frequency	5250	Polarization	Horizontal
Temp	20°C	Hum.	53%

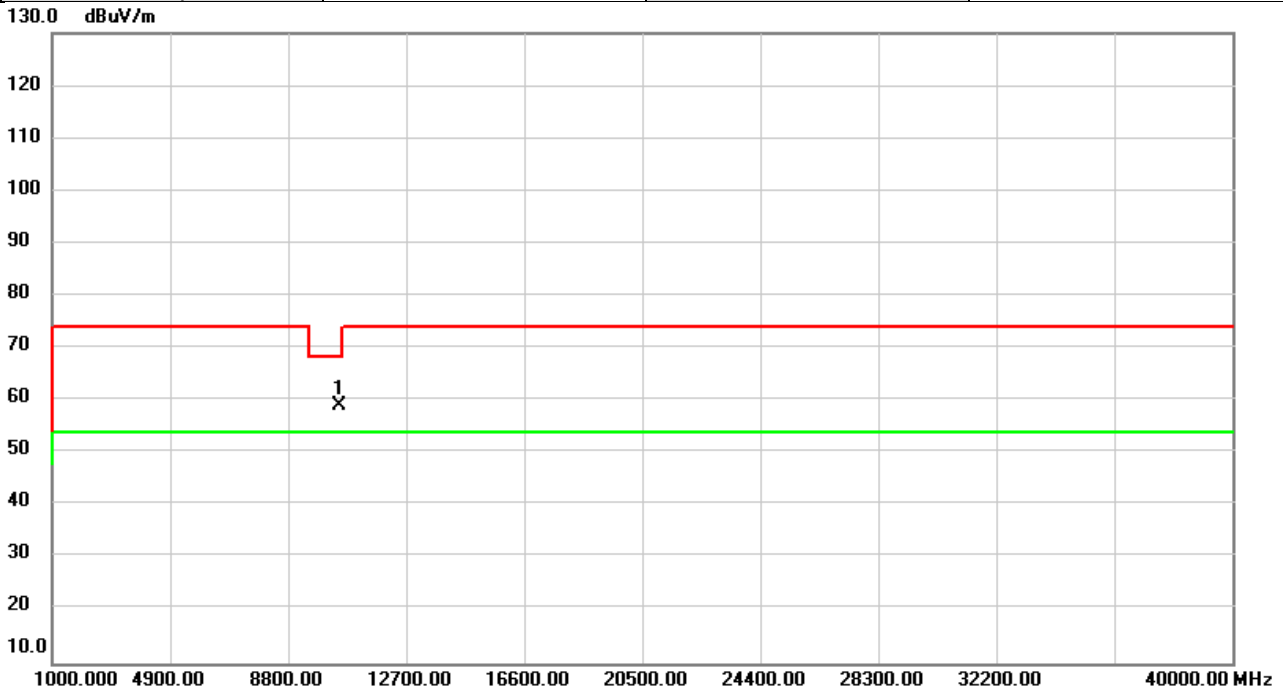


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10500.00	53.97	5.00	58.97	68.20	-9.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW160)	Test Date	2020/6/25
Test Frequency	5570	Polarization	Vertical
Temp	20°C	Hum.	53%

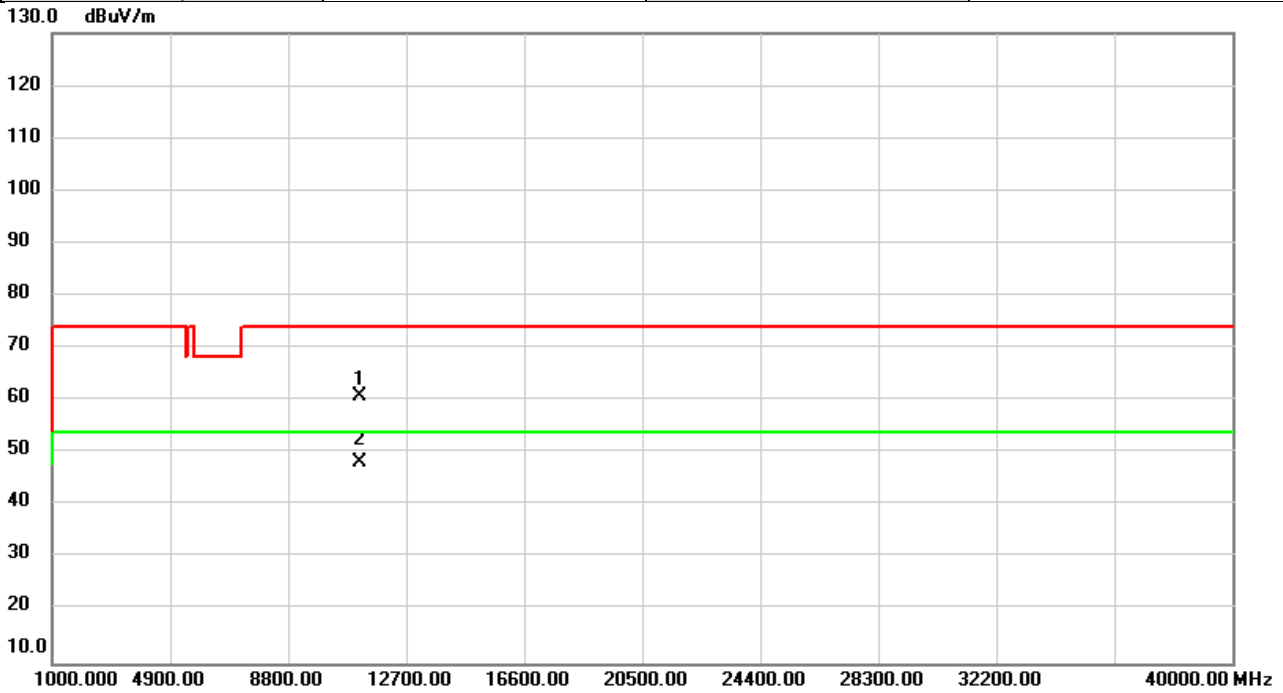


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11140.00	54.69	6.12	60.81	74.00	-13.19	peak	
2	*	11140.00	42.22	6.12	48.34	54.00	-5.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW160)	Test Date	2020/6/25
Test Frequency	5570	Polarization	Horizontal
Temp	20°C	Hum.	53%

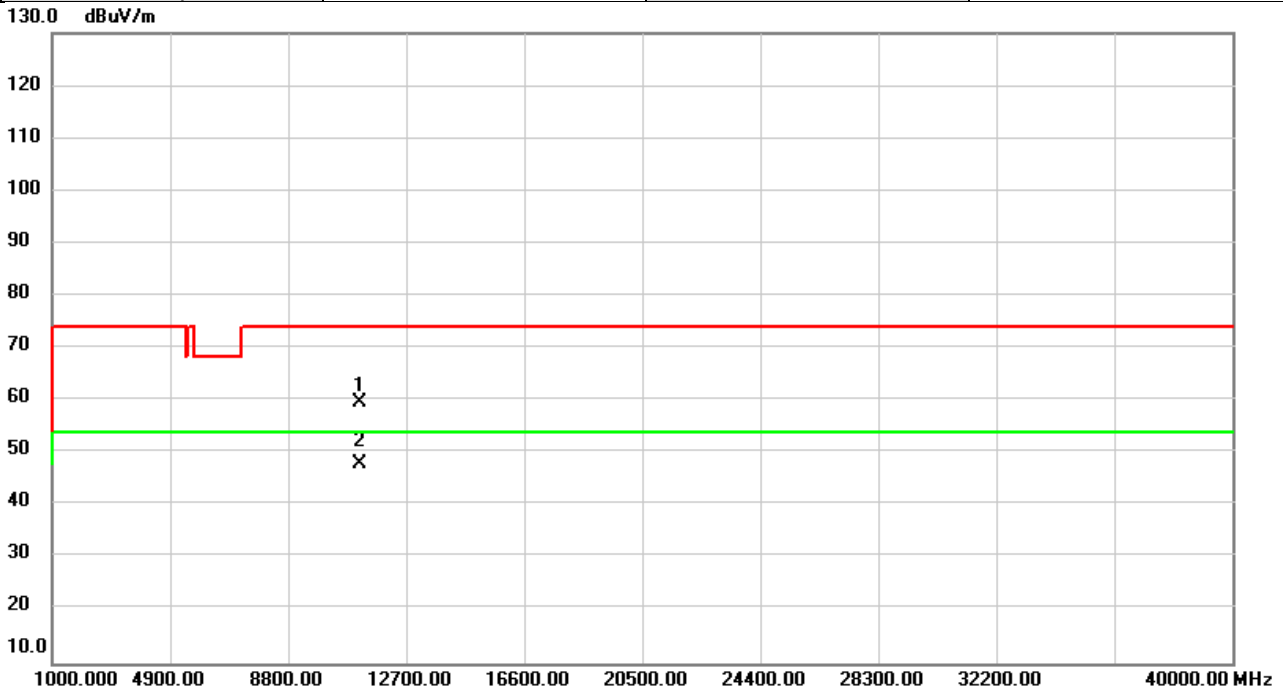


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11140.00	53.50	6.12	59.62	74.00	-14.38	peak	
2	*	11140.00	41.95	6.12	48.07	54.00	-5.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Beamforming mode
-----------	------------------

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/4
Test Frequency	5180	Polarization	Vertical
Temp	23°C	Hum.	60%

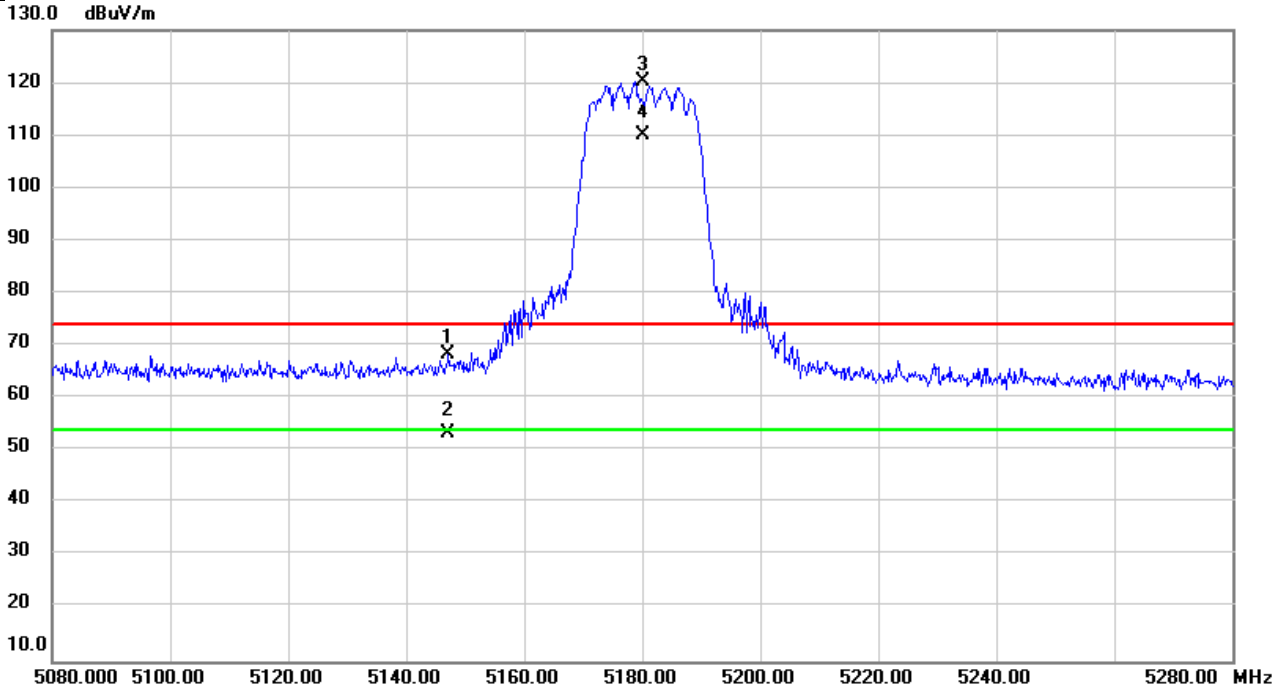


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5147.200	30.82	37.40	68.22	74.00	-5.78	peak	
2		5147.200	15.86	37.40	53.26	54.00	-0.74	AVG	
3	X	5180.000	82.81	37.43	120.24	74.00	46.24	peak	NoLimit
4	*	5180.000	72.62	37.43	110.05	54.00	56.05	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/4
Test Frequency	5240	Polarization	Vertical
Temp	23°C	Hum.	60%

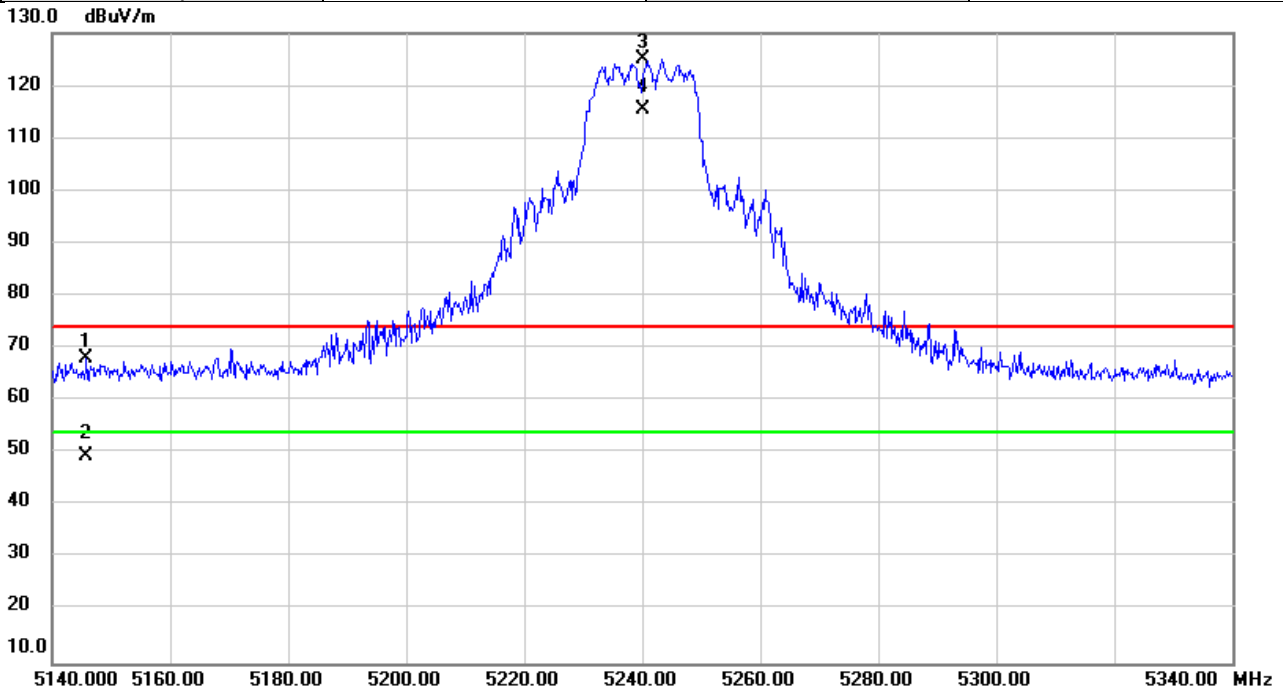


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5145.800	30.67	37.40	68.07	74.00	-5.93	peak	
2		5145.800	11.97	37.40	49.37	54.00	-4.63	AVG	
3	X	5240.000	87.51	37.48	124.99	74.00	50.99	peak	NoLimit
4	*	5240.000	78.01	37.48	115.49	54.00	61.49	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/4
Test Frequency	5260	Polarization	Vertical
Temp	23°C	Hum.	60%

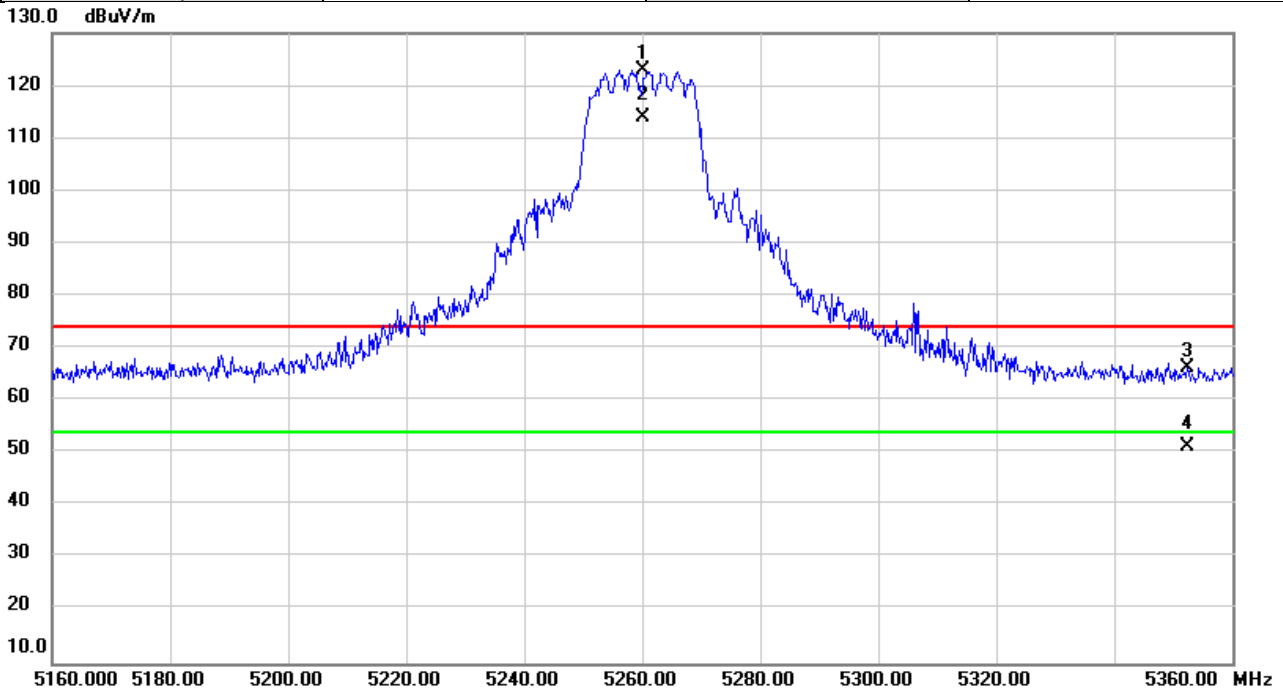


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5260.000	85.59	37.50	123.09	74.00	49.09	peak	NoLimit
2	*	5260.000	76.53	37.50	114.03	54.00	60.03	AVG	NoLimit
3		5352.400	28.62	37.58	66.20	74.00	-7.80	peak	
4		5352.400	13.75	37.58	51.33	54.00	-2.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/4
Test Frequency	5320	Polarization	Vertical
Temp	23°C	Hum.	60%

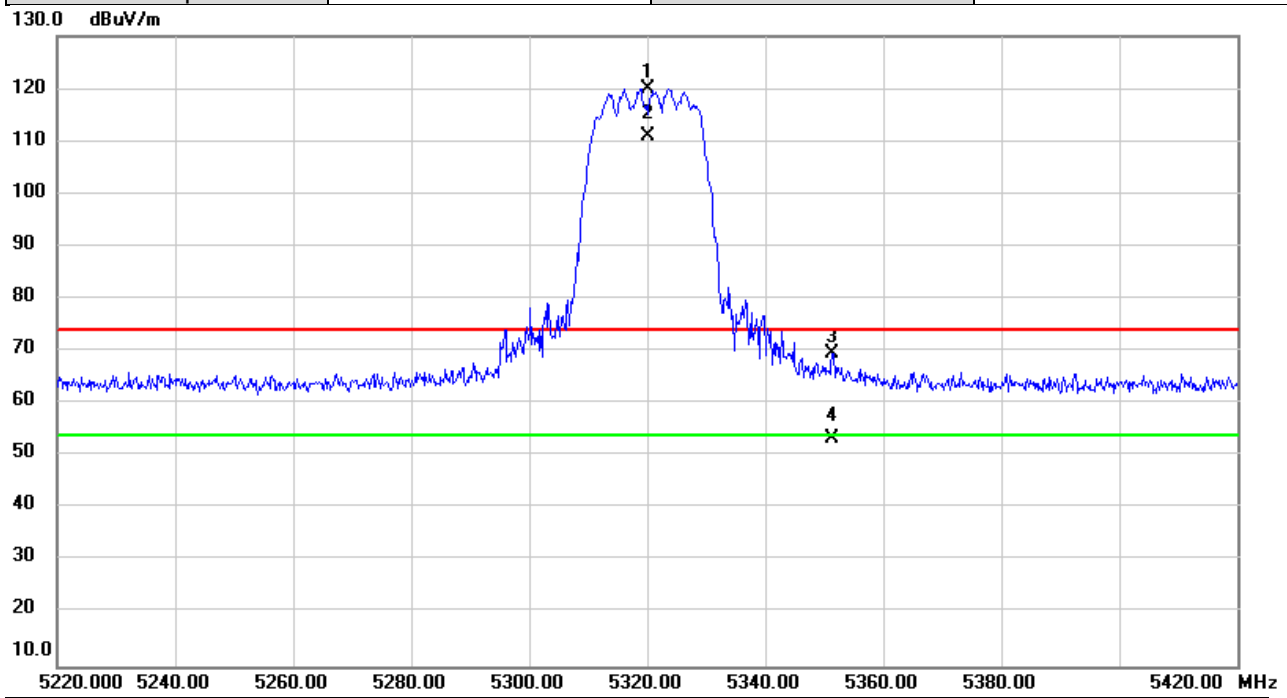

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5320.000	82.42	37.55	119.97	74.00	45.97	peak	NoLimit
2	*	5320.000	73.45	37.55	111.00	54.00	57.00	AVG	NoLimit
3		5351.400	31.97	37.58	69.55	74.00	-4.45	peak	
4		5351.400	15.90	37.58	53.48	54.00	-0.52	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/4
Test Frequency	5500	Polarization	Vertical
Temp	23°C	Hum.	60%

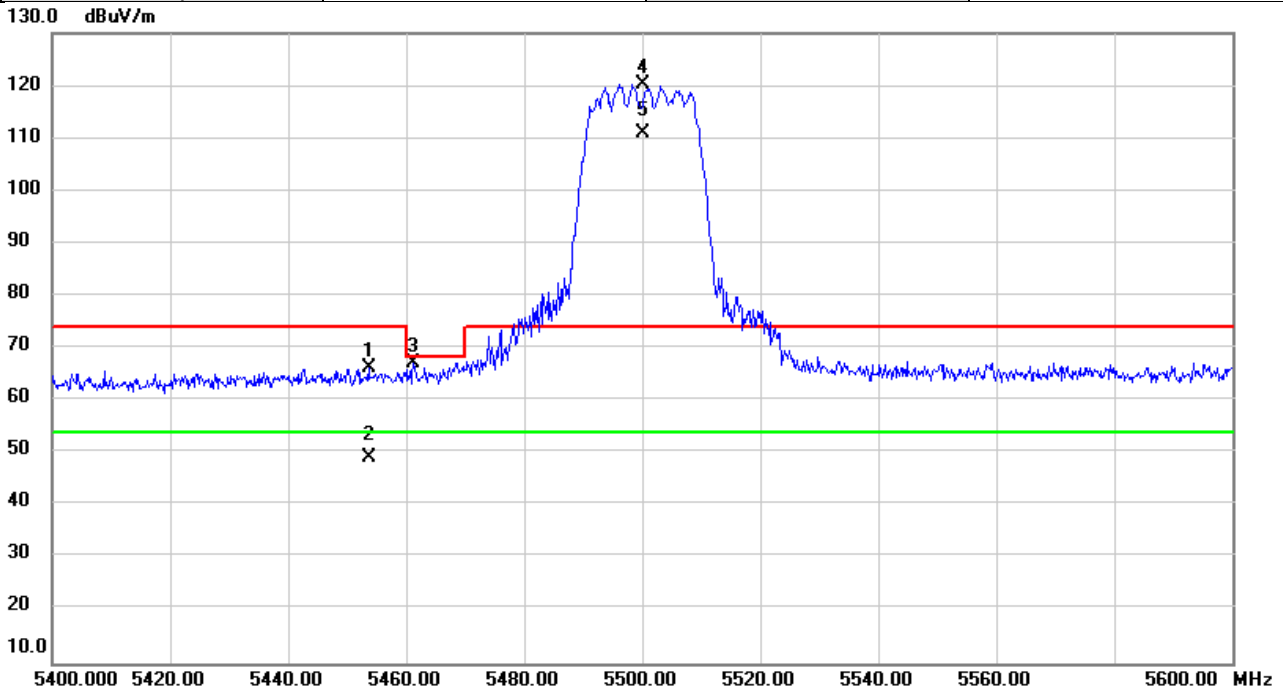


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5453.600	28.58	37.67	66.25	74.00	-7.75	peak	
2		5453.600	11.34	37.67	49.01	54.00	-4.99	AVG	
3		5461.200	29.54	37.68	67.22	68.20	-0.98	peak	
4	X	5500.000	82.61	37.71	120.32	74.00	46.32	peak	NoLimit
5	*	5500.000	73.19	37.71	110.90	54.00	56.90	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/4
Test Frequency	5700	Polarization	Vertical
Temp	23°C	Hum.	60%

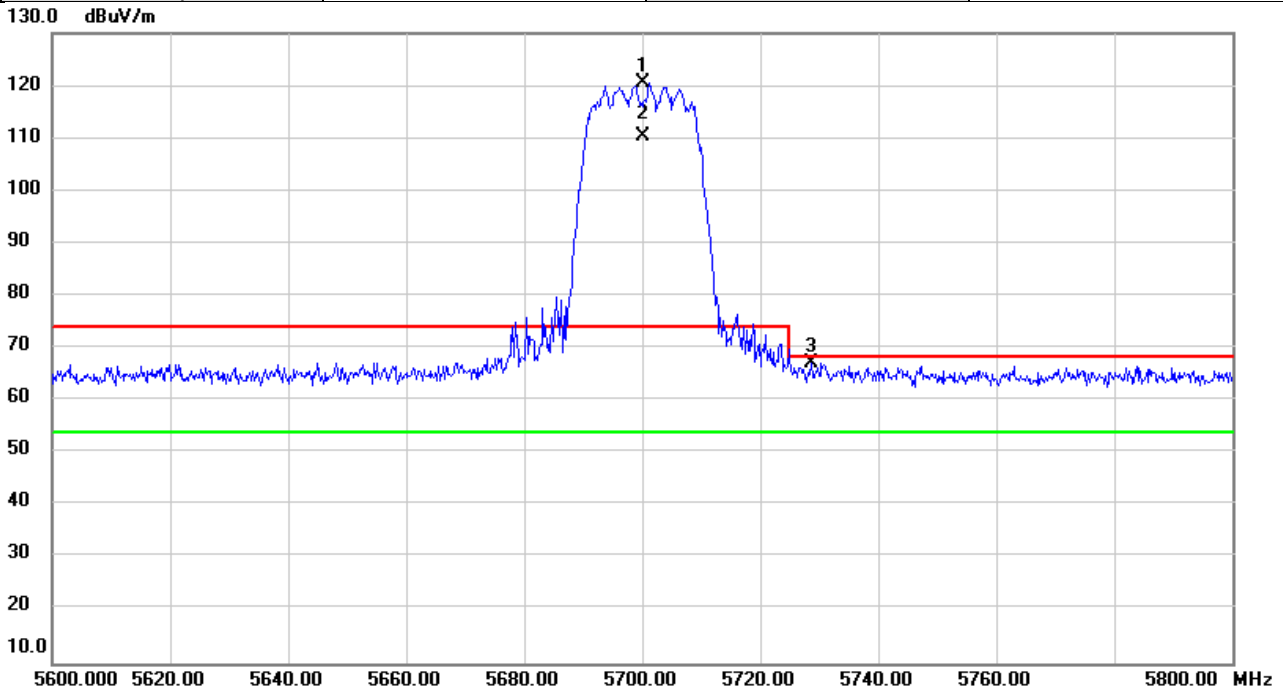


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5700.000	82.24	38.18	120.42	74.00	46.42	peak	NoLimit
2	*	5700.000	72.32	38.18	110.50	54.00	56.50	AVG	NoLimit
3		5728.600	28.88	38.24	67.12	68.20	-1.08	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/4
Test Frequency	5745	Polarization	Vertical
Temp	23°C	Hum.	60%

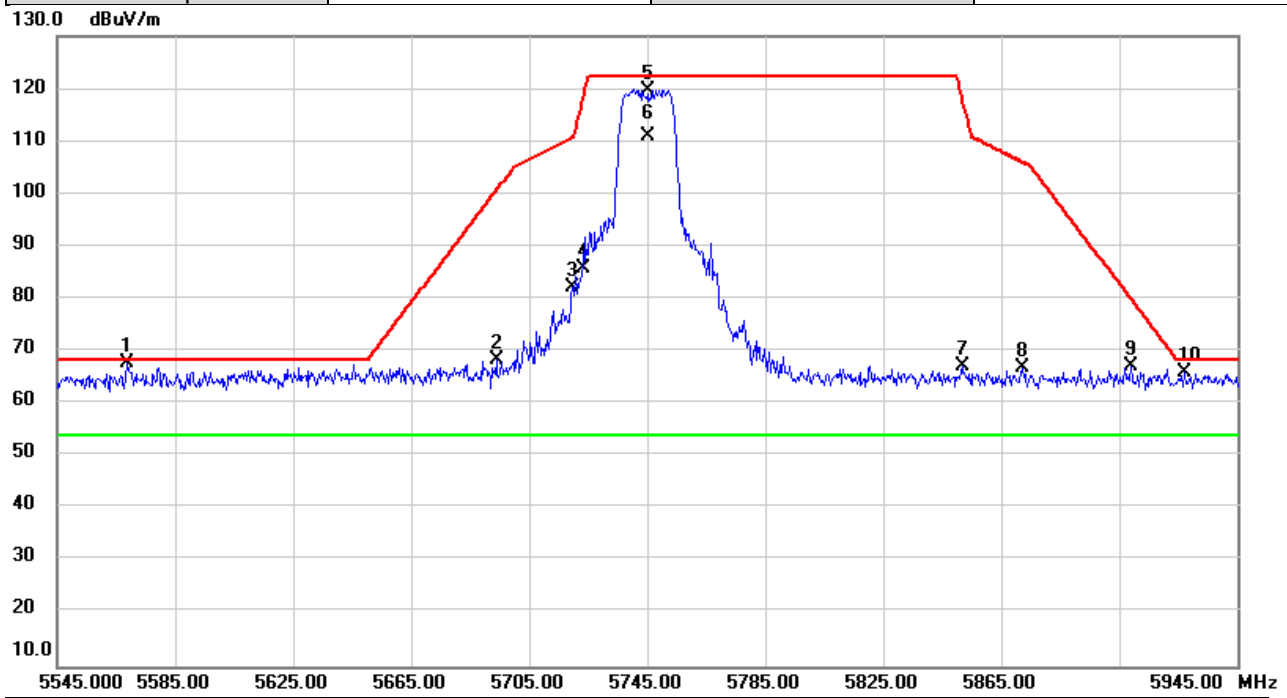

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5568.600	29.91	37.87	67.78	68.20	-0.42	peak	
2		5693.800	30.17	38.16	68.33	100.63	-32.30	peak	
3		5719.800	43.91	38.23	82.14	110.74	-28.60	peak	
4		5723.400	47.66	38.23	85.89	118.55	-32.66	peak	
5		5745.000	81.52	38.28	119.80	122.20	-2.40	peak	NoLimit
6	*	5745.000	72.65	38.28	110.93	54.00	56.93	AVG	NoLimit
7		5851.800	28.72	38.53	67.25	118.09	-50.84	peak	
8		5872.200	28.35	38.58	66.93	105.98	-39.05	peak	
9		5909.000	28.56	38.66	67.22	80.01	-12.79	peak	
10		5927.000	27.12	38.71	65.83	68.20	-2.37	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/4
Test Frequency	5825	Polarization	Vertical
Temp	23°C	Hum.	60%

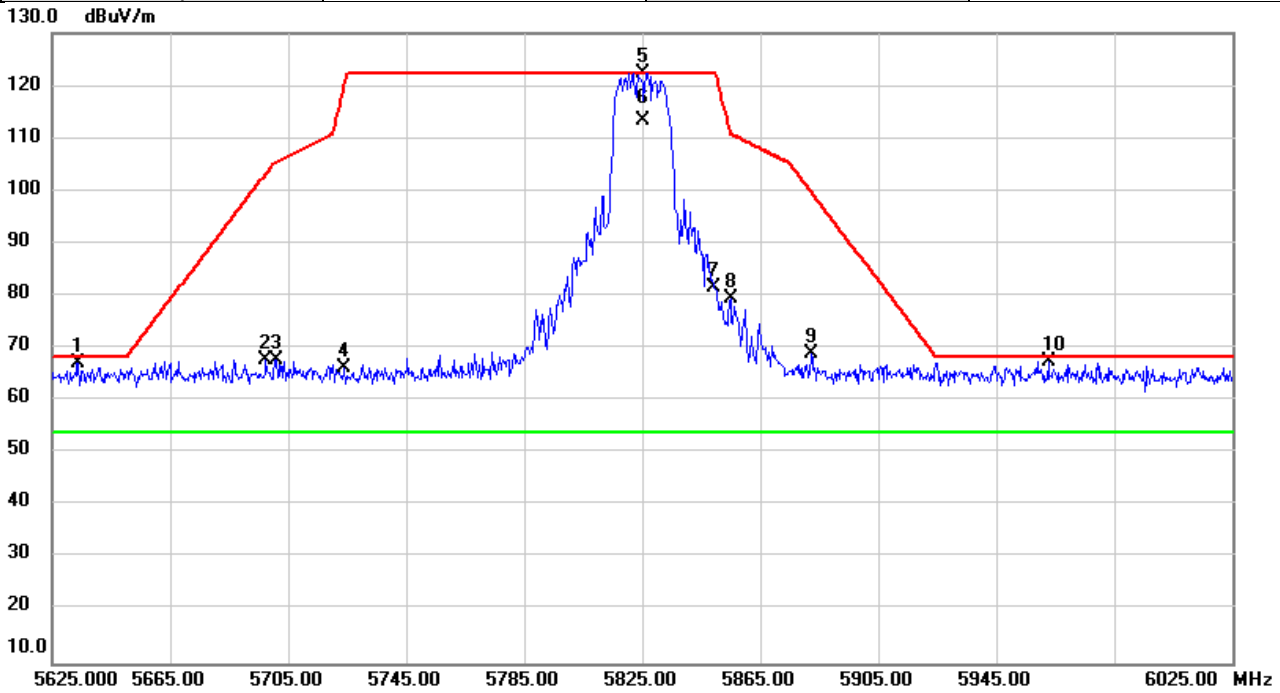


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5633.800	29.12	38.03	67.15	68.20	-1.05	peak	
2		5697.400	29.58	38.18	67.76	103.28	-35.52	peak	
3		5701.000	29.61	38.18	67.79	105.48	-37.69	peak	
4		5724.200	27.89	38.23	66.12	120.38	-54.26	peak	
5	X	5825.000	83.88	38.48	122.36	122.20	0.16	peak	NoLimit
6	*	5825.000	75.01	38.48	113.49	54.00	59.49	AVG	NoLimit
7		5849.400	42.98	38.53	81.51	122.20	-40.69	peak	
8		5855.000	40.77	38.54	79.31	110.80	-31.49	peak	
9		5882.200	30.36	38.61	68.97	99.85	-30.88	peak	
10		5962.600	28.77	38.79	67.56	68.20	-0.64	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/4
Test Frequency	5190	Polarization	Vertical
Temp	23°C	Hum.	60%

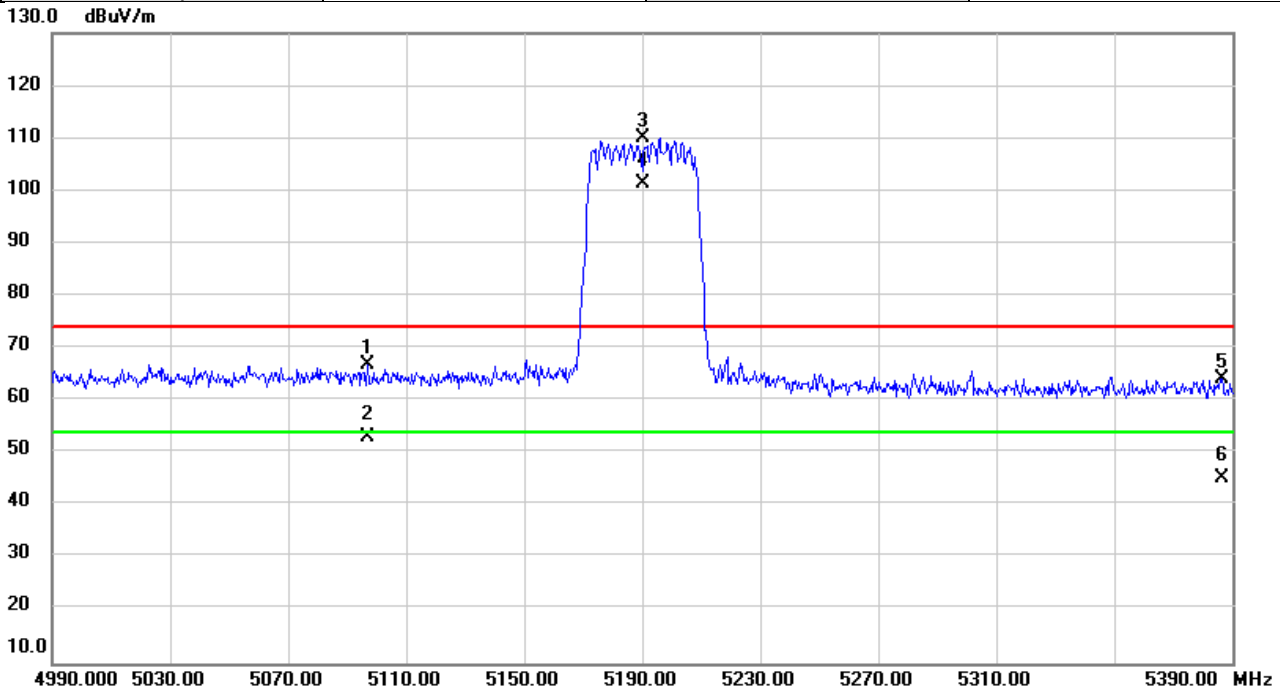


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5097.200	29.58	37.36	66.94	74.00	-7.06	peak	
2		5097.200	15.62	37.36	52.98	54.00	-1.02	AVG	
3	X	5190.000	72.48	37.43	109.91	74.00	35.91	peak	NoLimit
4	*	5190.000	63.85	37.43	101.28	54.00	47.28	AVG	NoLimit
5		5386.400	26.49	37.61	64.10	74.00	-9.90	peak	
6		5386.400	7.65	37.61	45.26	54.00	-8.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/4
Test Frequency	5230	Polarization	Vertical
Temp	23°C	Hum.	60%

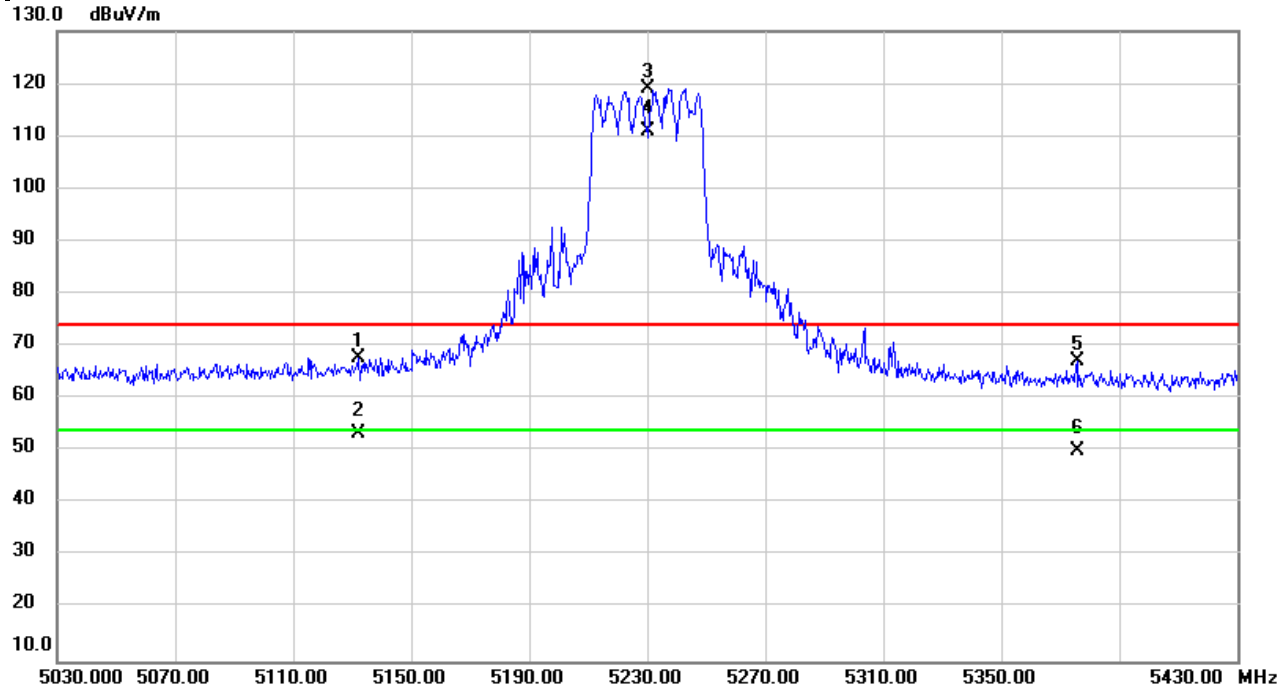

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5132.000	30.48	37.39	67.87	74.00	-6.13	peak	
2		5132.000	15.92	37.39	53.31	54.00	-0.69	AVG	
3	X	5230.000	81.72	37.47	119.19	74.00	45.19	peak	NoLimit
4	*	5230.000	73.63	37.47	111.10	54.00	57.10	AVG	NoLimit
5		5375.600	29.59	37.61	67.20	74.00	-6.80	peak	
6		5375.600	12.32	37.61	49.93	54.00	-4.07	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/4
Test Frequency	5270	Polarization	Vertical
Temp	23°C	Hum.	60%

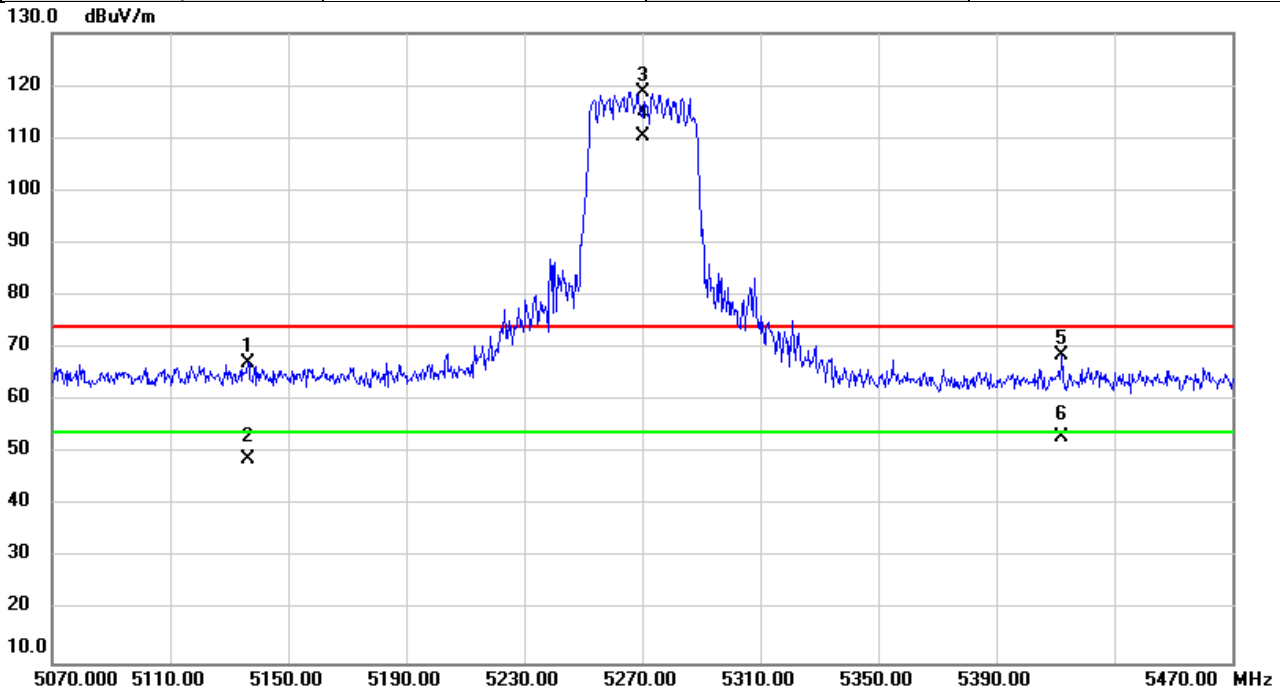


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5136.400	29.77	37.39	67.16	74.00	-6.84	peak	
2		5136.400	11.52	37.39	48.91	54.00	-5.09	AVG	
3	X	5270.000	81.23	37.51	118.74	74.00	44.74	peak	NoLimit
4	*	5270.000	72.77	37.51	110.28	54.00	56.28	AVG	NoLimit
5		5412.400	31.08	37.64	68.72	74.00	-5.28	peak	
6		5412.400	15.36	37.64	53.00	54.00	-1.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/4
Test Frequency	5310	Polarization	Vertical
Temp	22°C	Hum.	52%

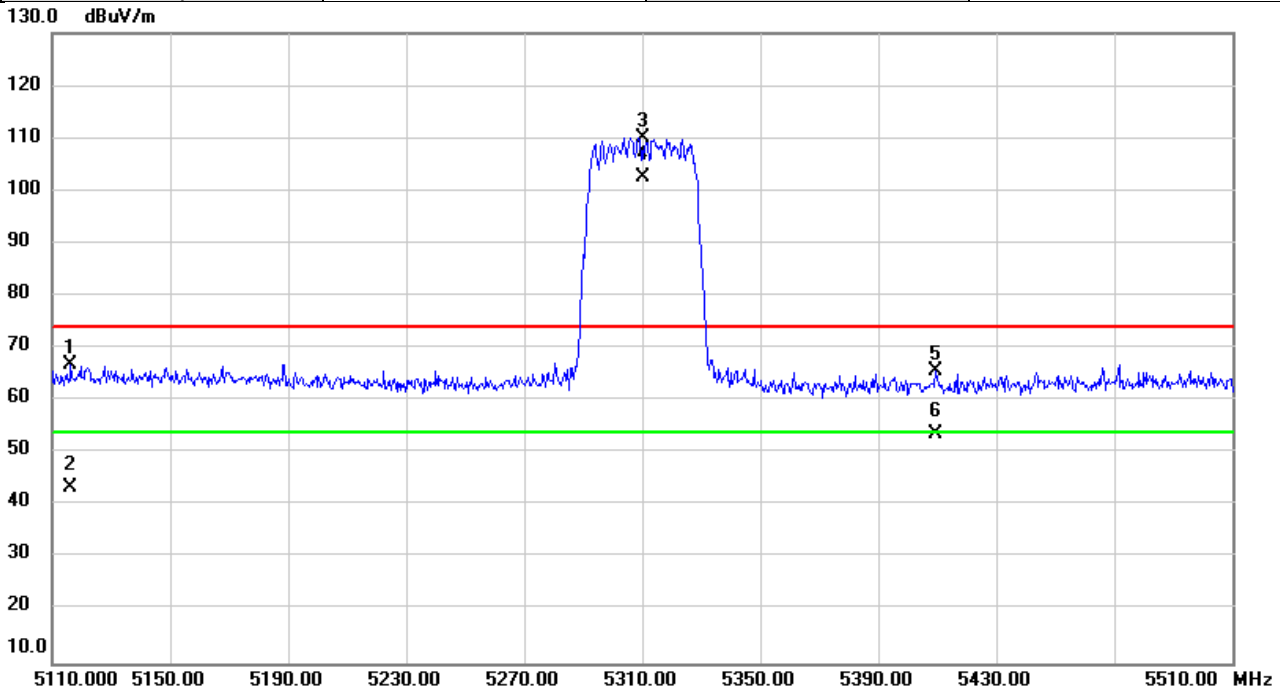


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5116.400	29.43	37.37	66.80	74.00	-7.20	peak	
2		5116.400	6.08	37.37	43.45	54.00	-10.55	AVG	
3	X	5310.000	72.39	37.55	109.94	74.00	35.94	peak	NoLimit
4	*	5310.000	65.06	37.55	102.61	54.00	48.61	AVG	NoLimit
5		5409.600	27.99	37.63	65.62	74.00	-8.38	peak	
6		5409.600	15.95	37.63	53.58	54.00	-0.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/4
Test Frequency	5510	Polarization	Vertical
Temp	22°C	Hum.	52%

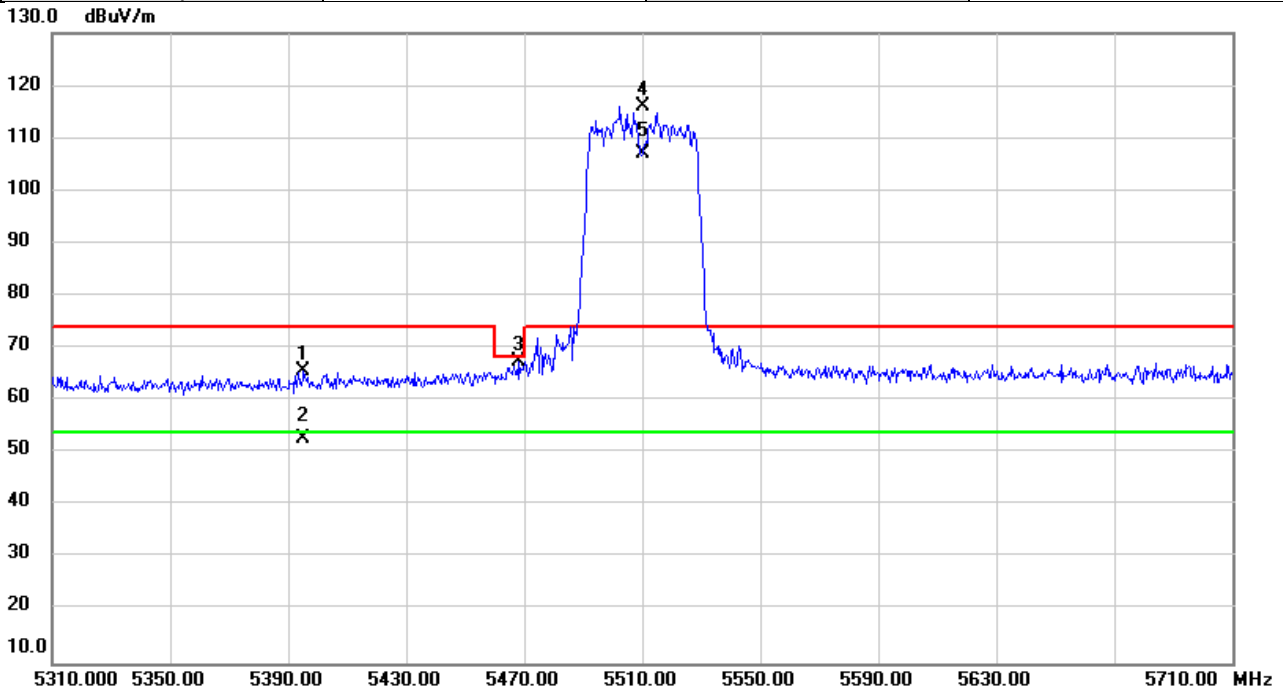


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5395.200	27.96	37.62	65.58	74.00	-8.42	peak	
2		5395.200	15.02	37.62	52.64	54.00	-1.36	AVG	
3		5468.400	29.67	37.68	67.35	68.20	-0.85	peak	
4	X	5510.000	78.19	37.73	115.92	74.00	41.92	peak	NoLimit
5	*	5510.000	69.27	37.73	107.00	54.00	53.00	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/4
Test Frequency	5670	Polarization	Vertical
Temp	22°C	Hum.	52%

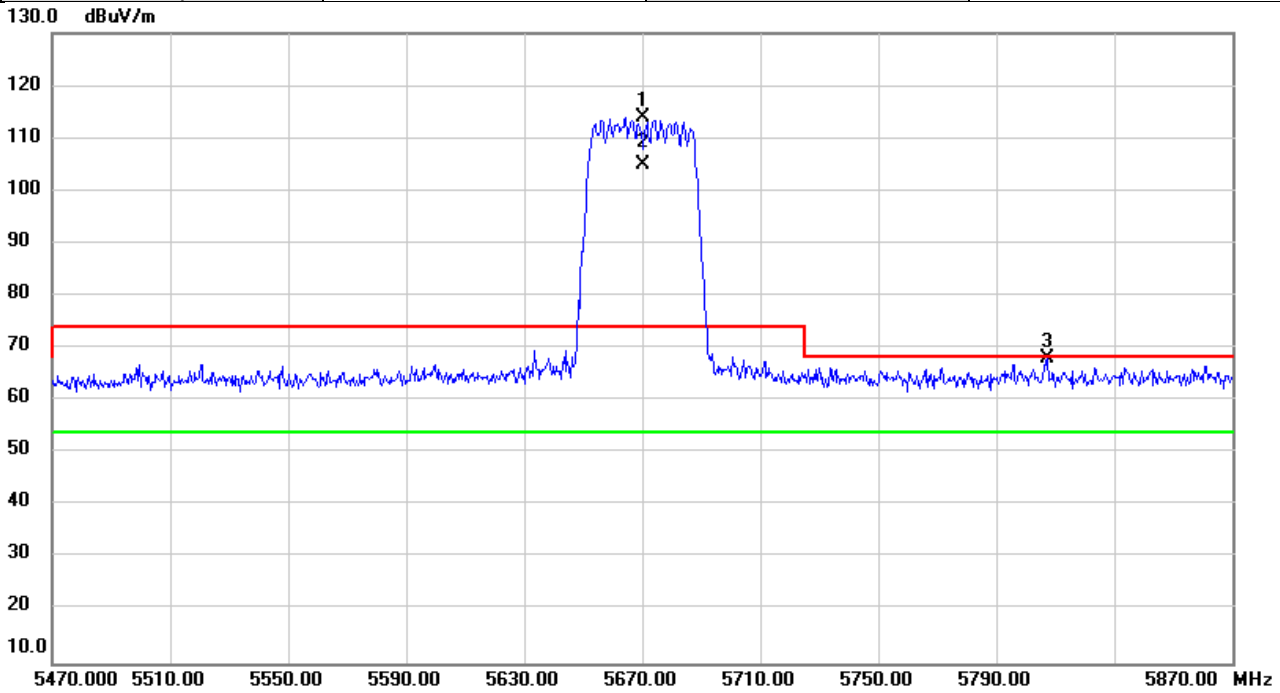


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5670.000	75.77	38.11	113.88	74.00	39.88	peak	NoLimit
2	*	5670.000	66.93	38.11	105.04	54.00	51.04	AVG	NoLimit
3		5807.200	29.51	38.43	67.94	68.20	-0.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/4
Test Frequency	5755	Polarization	Vertical
Temp	22°C	Hum.	52%

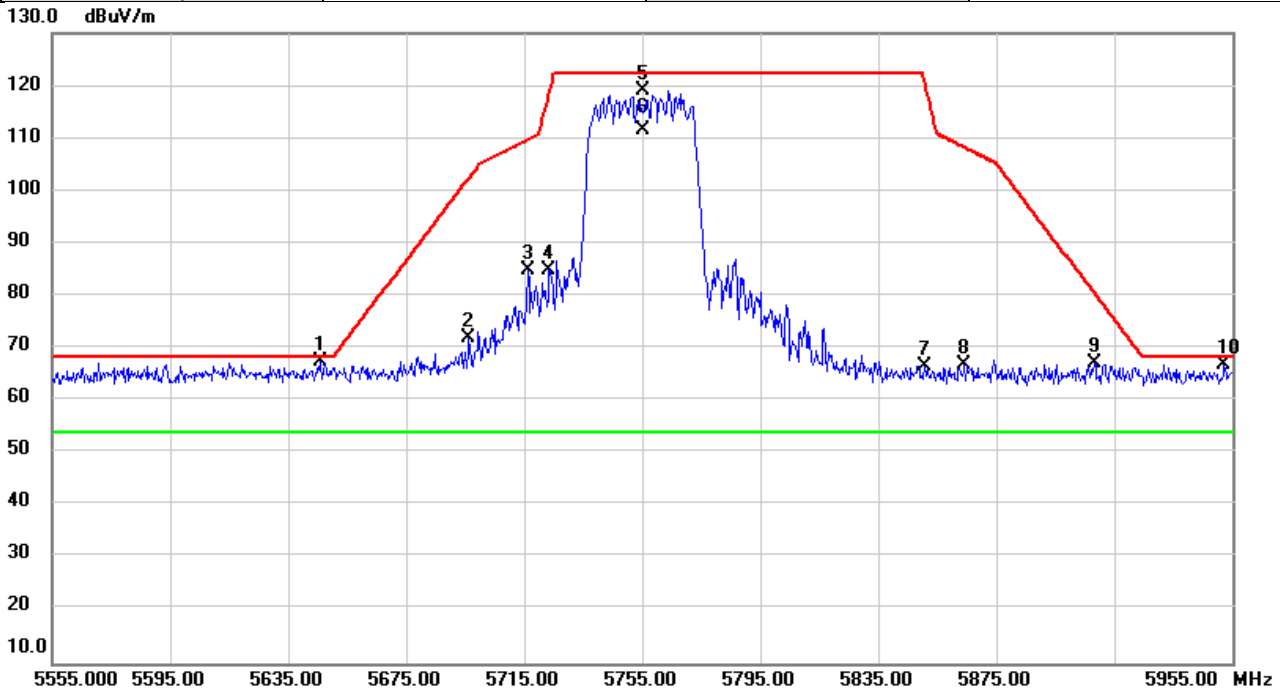


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5645.800	29.40	38.05	67.45	68.20	-0.75	peak	
2		5696.200	33.93	38.16	72.09	102.40	-30.31	peak	
3		5716.200	46.63	38.21	84.84	109.74	-24.90	peak	
4		5723.400	46.57	38.23	84.80	118.55	-33.75	peak	
5		5755.000	80.71	38.31	119.02	122.20	-3.18	peak	NoLimit
6	*	5755.000	73.19	38.31	111.50	54.00	57.50	AVG	NoLimit
7		5850.600	27.94	38.53	66.47	120.83	-54.36	peak	
8		5864.200	28.23	38.56	66.79	108.22	-41.43	peak	
9		5908.200	28.54	38.66	67.20	80.60	-13.40	peak	
10		5952.200	27.98	38.77	66.75	68.20	-1.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/4
Test Frequency	5795	Polarization	Vertical
Temp	22°C	Hum.	52%

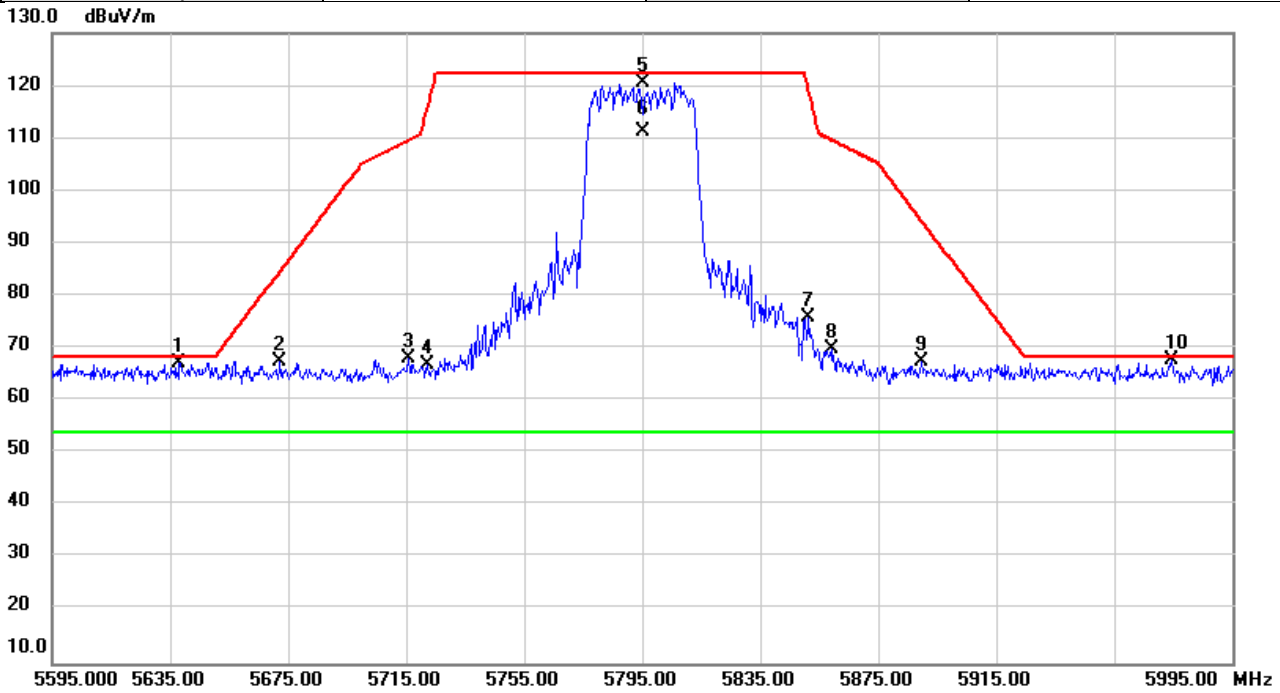


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5638.200	29.17	38.03	67.20	68.20	-1.00	peak	
2		5672.200	29.32	38.11	67.43	84.67	-17.24	peak	
3		5715.800	29.73	38.21	67.94	109.63	-41.69	peak	
4		5722.200	28.50	38.23	66.73	115.82	-49.09	peak	
5		5795.000	82.22	38.40	120.62	122.20	-1.58	peak	NoLimit
6	*	5795.000	72.75	38.40	111.15	54.00	57.15	AVG	NoLimit
7		5851.400	37.33	38.53	75.86	119.01	-43.15	peak	
8		5859.000	31.24	38.55	69.79	109.68	-39.89	peak	
9		5889.800	28.70	38.63	67.33	94.22	-26.89	peak	
10		5974.600	28.95	38.82	67.77	68.20	-0.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/7/4
Test Frequency	5210	Polarization	Vertical
Temp	22°C	Hum.	52%

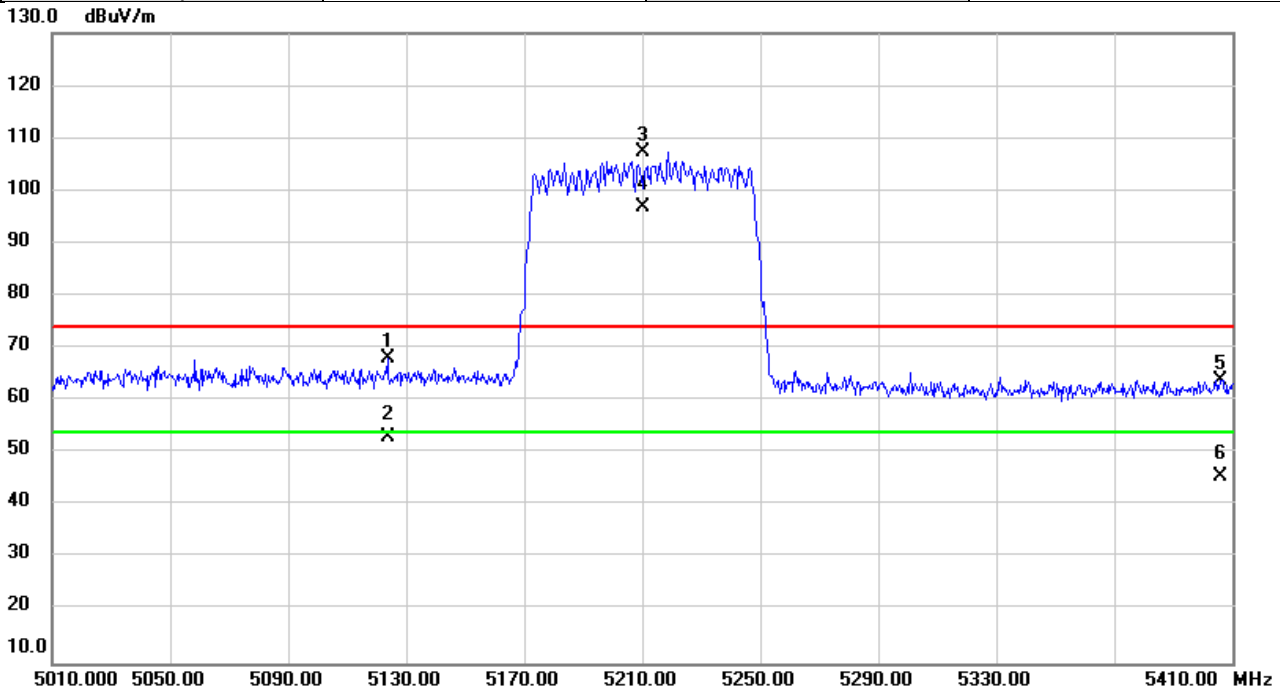


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5123.600	30.82	37.37	68.19	74.00	-5.81	peak	
2		5123.600	15.65	37.37	53.02	54.00	-0.98	AVG	
3	X	5210.000	69.85	37.46	107.31	74.00	33.31	peak	NoLimit
4	*	5210.000	59.45	37.46	96.91	54.00	42.91	AVG	NoLimit
5		5406.000	26.28	37.62	63.90	74.00	-10.10	peak	
6		5406.000	8.02	37.62	45.64	54.00	-8.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/7/4
Test Frequency	5290	Polarization	Vertical
Temp	22°C	Hum.	52%

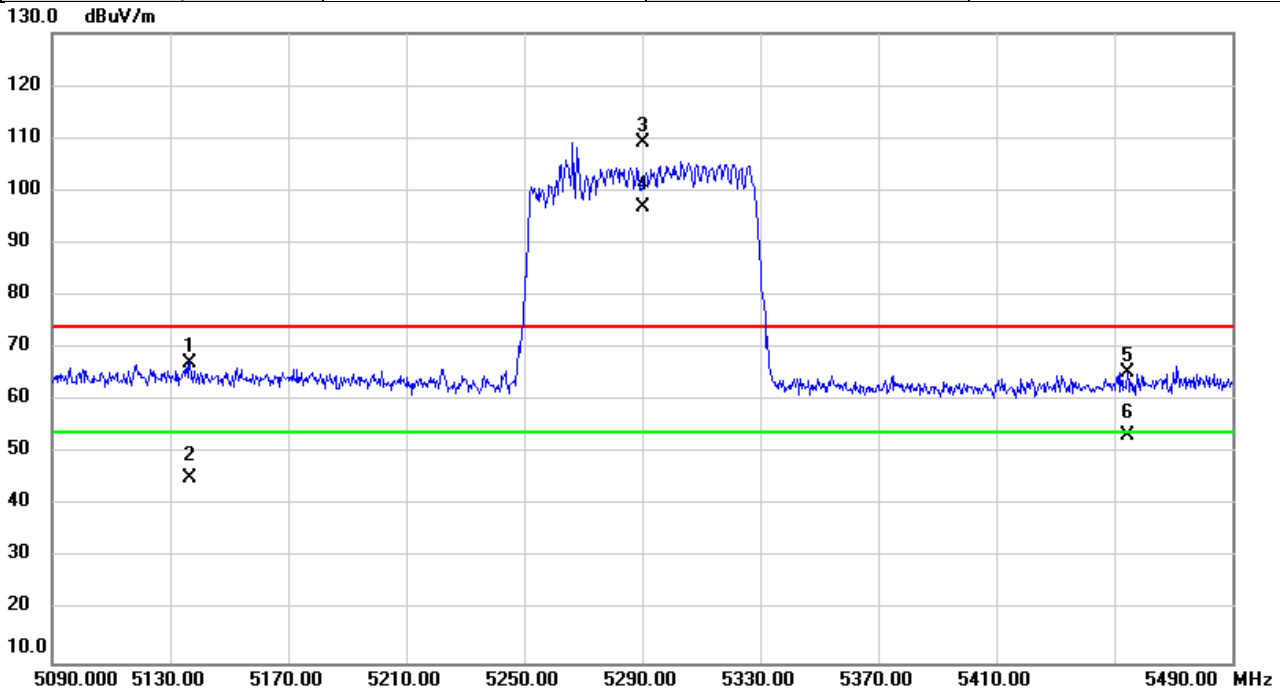


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5136.800	29.79	37.39	67.18	74.00	-6.82	peak	
2		5136.800	7.96	37.39	45.35	54.00	-8.65	AVG	
3	X	5290.000	71.71	37.52	109.23	74.00	35.23	peak	NoLimit
4	*	5290.000	59.44	37.52	96.96	54.00	42.96	AVG	NoLimit
5		5454.400	27.56	37.67	65.23	74.00	-8.77	peak	
6		5454.400	15.64	37.67	53.31	54.00	-0.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/7/4
Test Frequency	5530	Polarization	Vertical
Temp	22°C	Hum.	52%

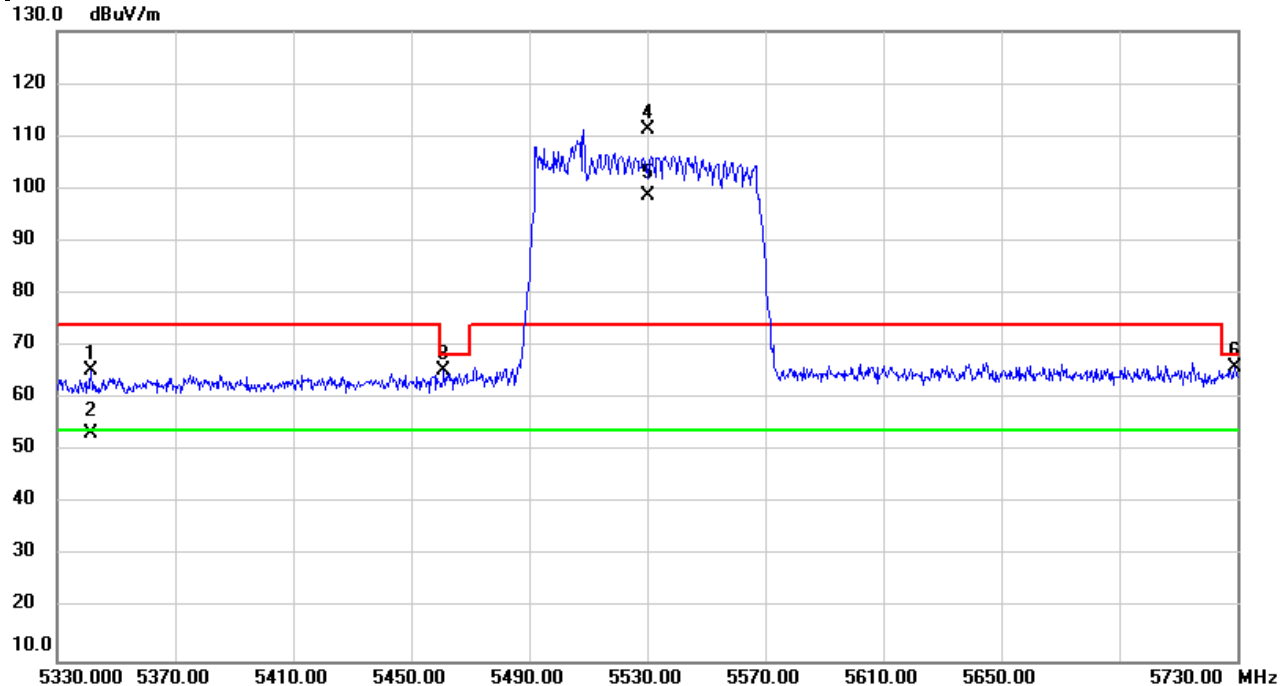

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5341.600	27.81	37.57	65.38	74.00	-8.62	peak	
2		5341.600	15.75	37.57	53.32	54.00	-0.68	AVG	
3		5461.200	27.63	37.68	65.31	68.20	-2.89	peak	
4	X	5530.000	73.44	37.78	111.22	74.00	37.22	peak	NoLimit
5	*	5530.000	60.85	37.78	98.63	54.00	44.63	AVG	NoLimit
6		5729.200	27.65	38.25	65.90	68.20	-2.30	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/7/4
Test Frequency	5610	Polarization	Vertical
Temp	22°C	Hum.	52%

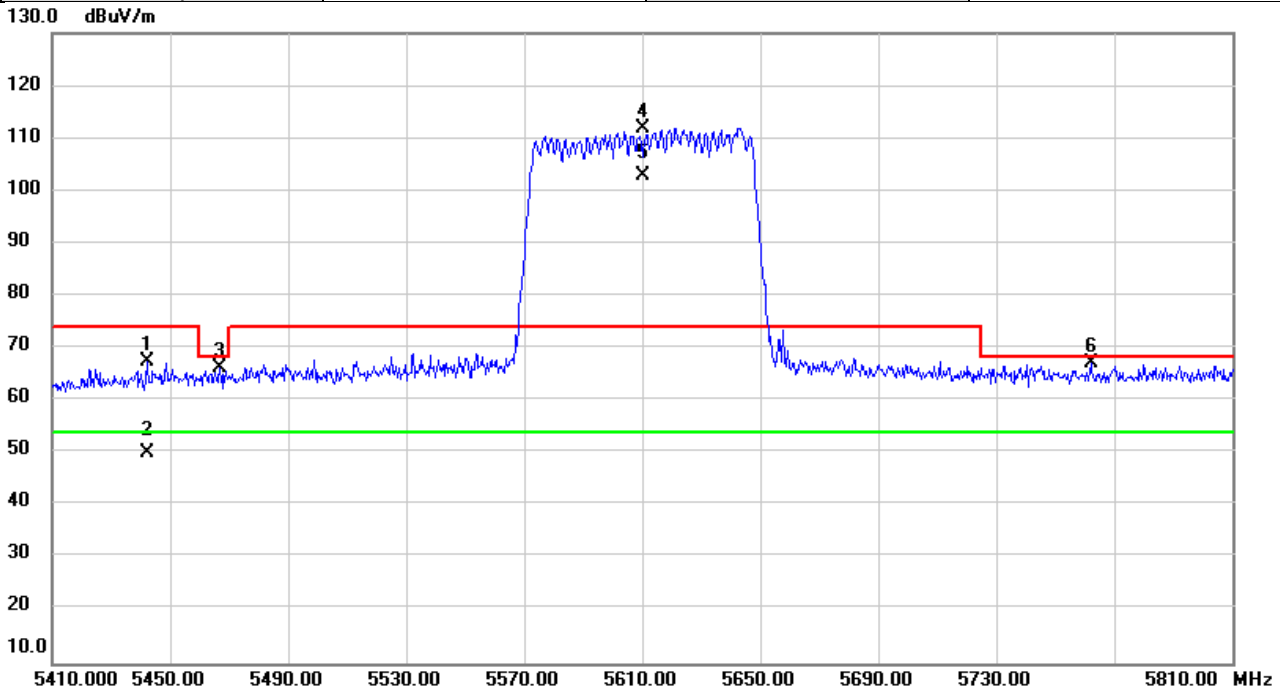


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5442.000	29.67	37.66	67.33	74.00	-6.67	peak	
2		5442.000	12.25	37.66	49.91	54.00	-4.09	AVG	
3		5466.800	28.57	37.68	66.25	68.20	-1.95	peak	
4	X	5610.000	73.87	37.96	111.83	74.00	37.83	peak	NoLimit
5	*	5610.000	64.93	37.96	102.89	54.00	48.89	AVG	NoLimit
6		5762.000	28.84	38.33	67.17	68.20	-1.03	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/7/4
Test Frequency	5775	Polarization	Vertical
Temp	22°C	Hum.	52%

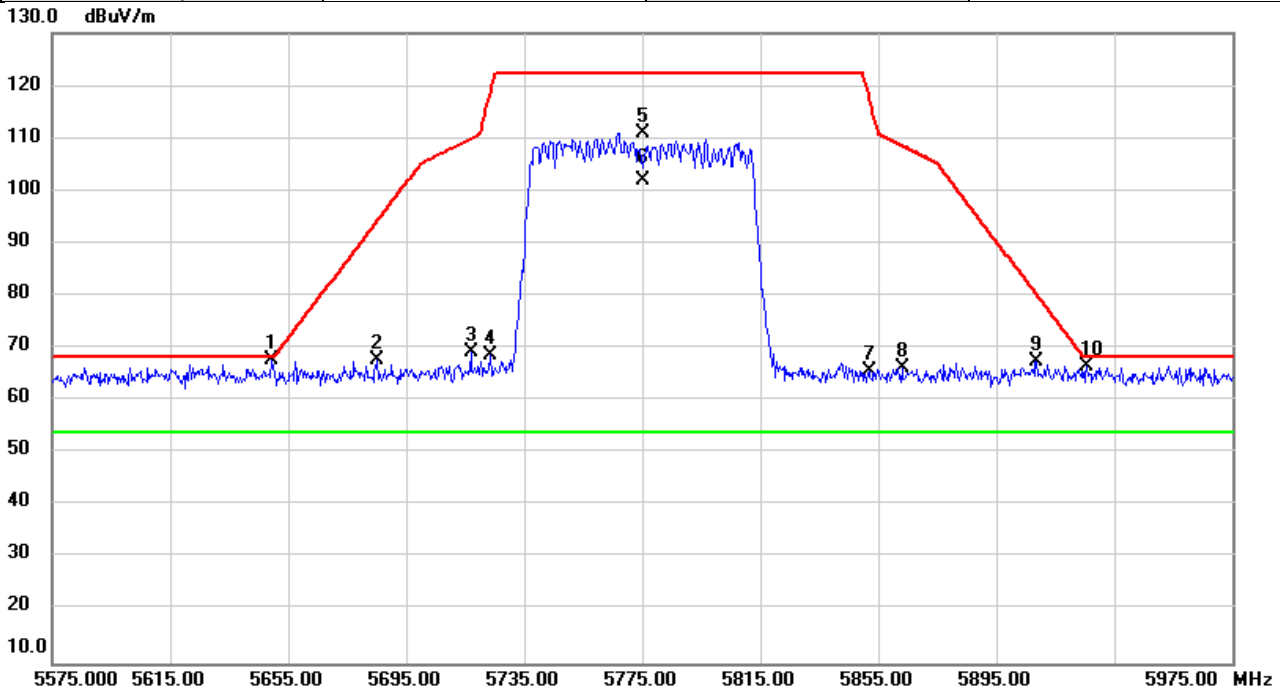


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5649.400	29.59	38.06	67.65	68.20	-0.55	peak	
2		5685.400	29.64	38.14	67.78	94.43	-26.65	peak	
3		5717.000	31.09	38.21	69.30	109.96	-40.66	peak	
4		5723.400	30.35	38.23	68.58	118.55	-49.97	peak	
5		5775.000	72.56	38.35	110.91	122.20	-11.29	peak	NoLimit
6	*	5775.000	63.69	38.35	102.04	54.00	48.04	AVG	NoLimit
7		5851.800	27.04	38.53	65.57	118.09	-52.52	peak	
8		5863.000	27.80	38.56	66.36	108.56	-42.20	peak	
9		5908.600	28.71	38.66	67.37	80.30	-12.93	peak	
10		5925.800	27.95	38.71	66.66	68.20	-1.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ac (VHT160)	Test Date	2020/7/4
Test Frequency	5250	Polarization	Vertical
Temp	22°C	Hum.	52%

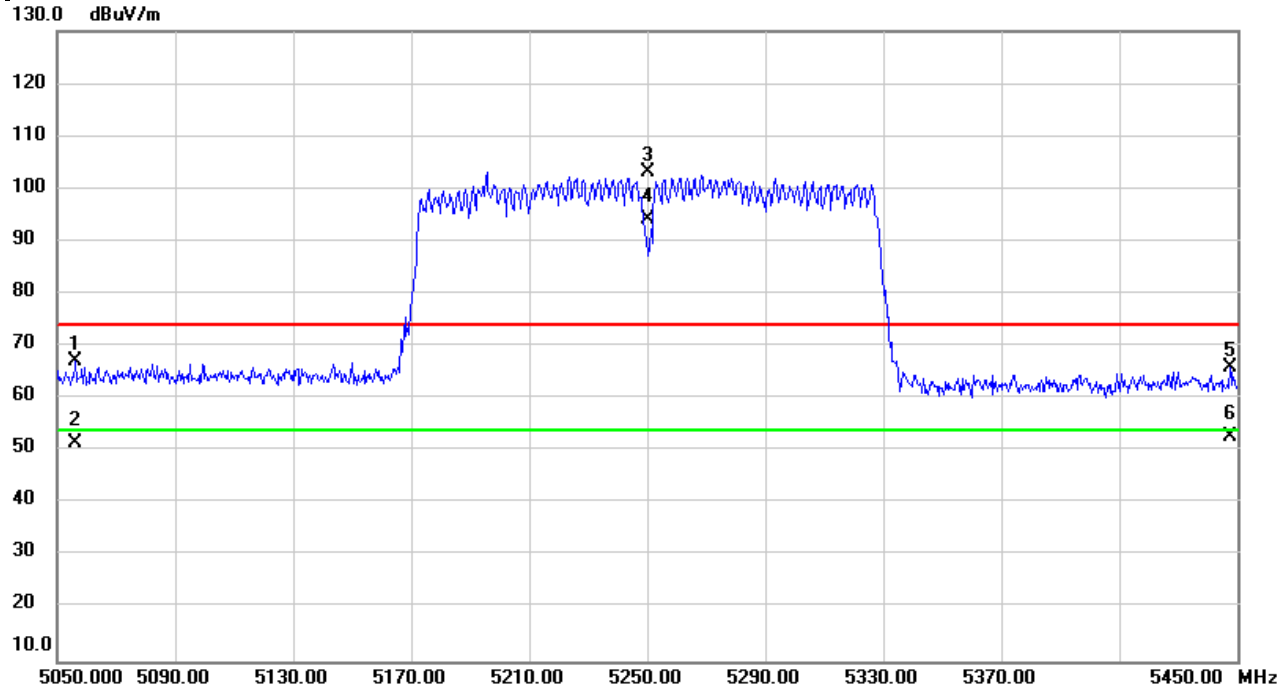

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5056.400	29.95	37.32	67.27	74.00	-6.73	peak	
2		5056.400	14.30	37.32	51.62	54.00	-2.38	AVG	
3	X	5250.000	65.69	37.49	103.18	74.00	29.18	peak	NoLimit
4	*	5250.000	56.59	37.49	94.08	54.00	40.08	AVG	NoLimit
5		5447.600	28.21	37.67	65.88	74.00	-8.12	peak	
6		5447.600	15.09	37.67	52.76	54.00	-1.24	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2020/7/4
Test Frequency	5570	Polarization	Vertical
Temp	22°C	Hum.	52%

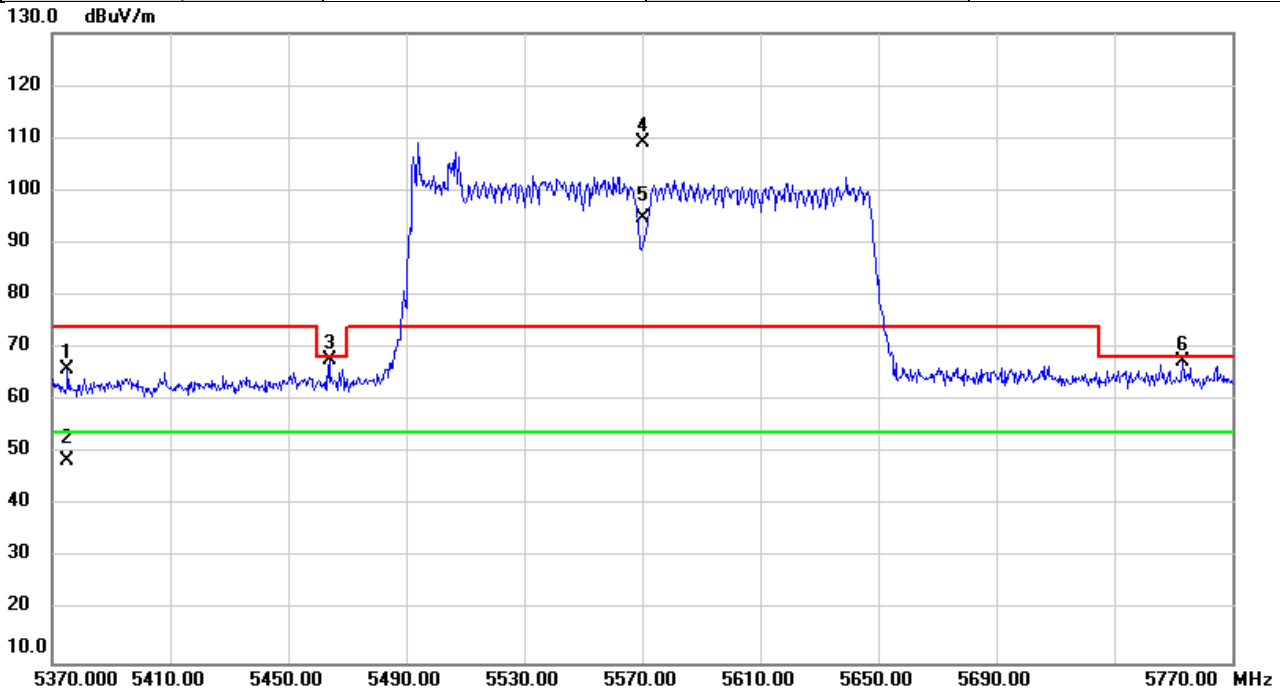


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5375.200	28.23	37.61	65.84	74.00	-8.16	peak	
2		5375.200	10.99	37.61	48.60	54.00	-5.40	AVG	
3		5464.000	29.97	37.68	67.65	68.20	-0.55	peak	
4	X	5570.000	71.35	37.88	109.23	74.00	35.23	peak	NoLimit
5	*	5570.000	56.74	37.88	94.62	54.00	40.62	AVG	NoLimit
6		5753.200	29.27	38.30	67.57	68.20	-0.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/4
Test Frequency	5180	Polarization	Vertical
Temp	22°C	Hum.	52%

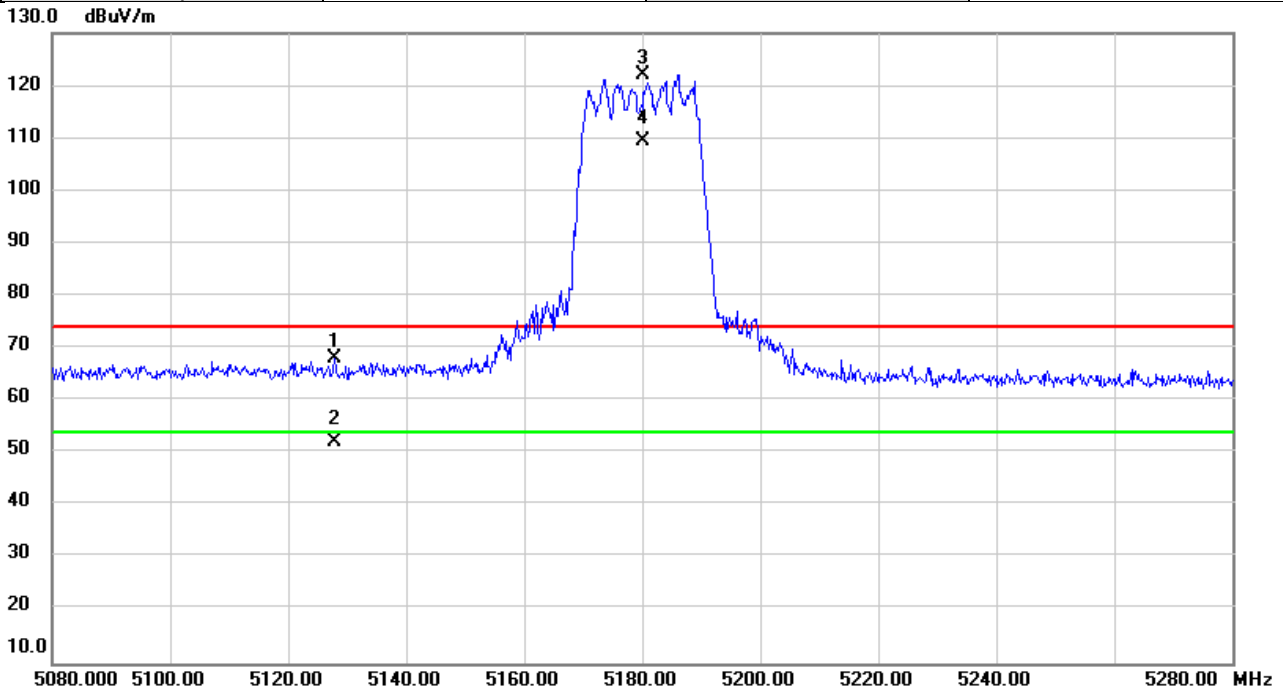


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5127.800	30.53	37.39	67.92	74.00	-6.08	peak	
2		5127.800	14.81	37.39	52.20	54.00	-1.80	AVG	
3	X	5180.000	84.74	37.43	122.17	74.00	48.17	peak	NoLimit
4	*	5180.000	72.02	37.43	109.45	54.00	55.45	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/4
Test Frequency	5240	Polarization	Vertical
Temp	22°C	Hum.	52%

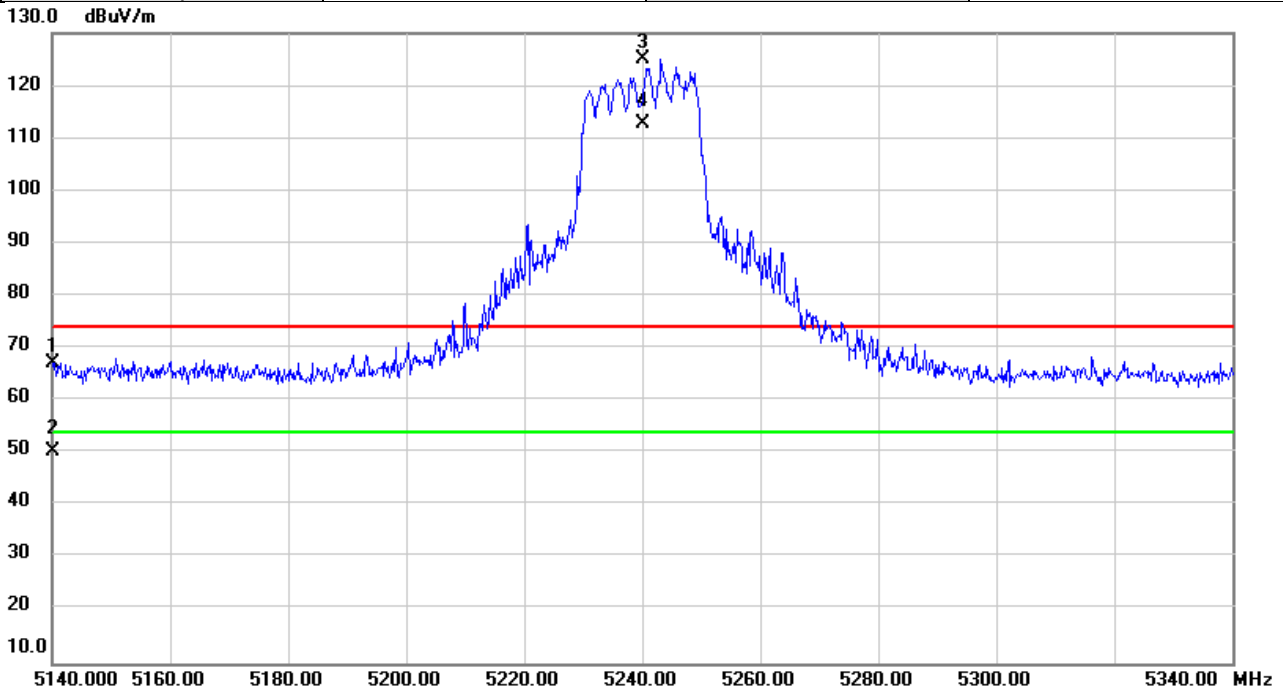


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5140.200	29.72	37.39	67.11	74.00	-6.89	peak	
2		5140.200	12.83	37.39	50.22	54.00	-3.78	AVG	
3	X	5240.000	87.69	37.48	125.17	74.00	51.17	peak	NoLimit
4	*	5240.000	75.14	37.48	112.62	54.00	58.62	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/4
Test Frequency	5260	Polarization	Vertical
Temp	22°C	Hum.	52%

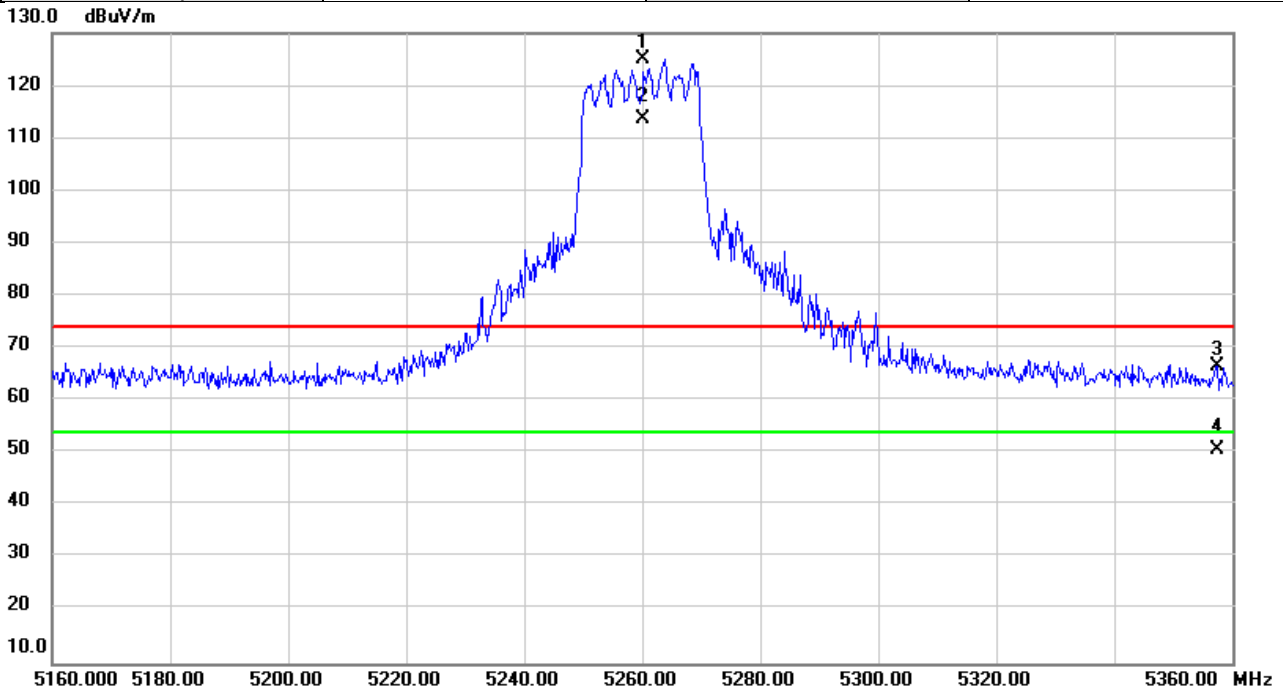


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5260.000	87.41	37.50	124.91	74.00	50.91	peak	NoLimit
2	*	5260.000	76.23	37.50	113.73	54.00	59.73	AVG	NoLimit
3		5357.400	28.90	37.58	66.48	74.00	-7.52	peak	
4		5357.400	13.17	37.58	50.75	54.00	-3.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/4
Test Frequency	5320	Polarization	Vertical
Temp	22°C	Hum.	52%

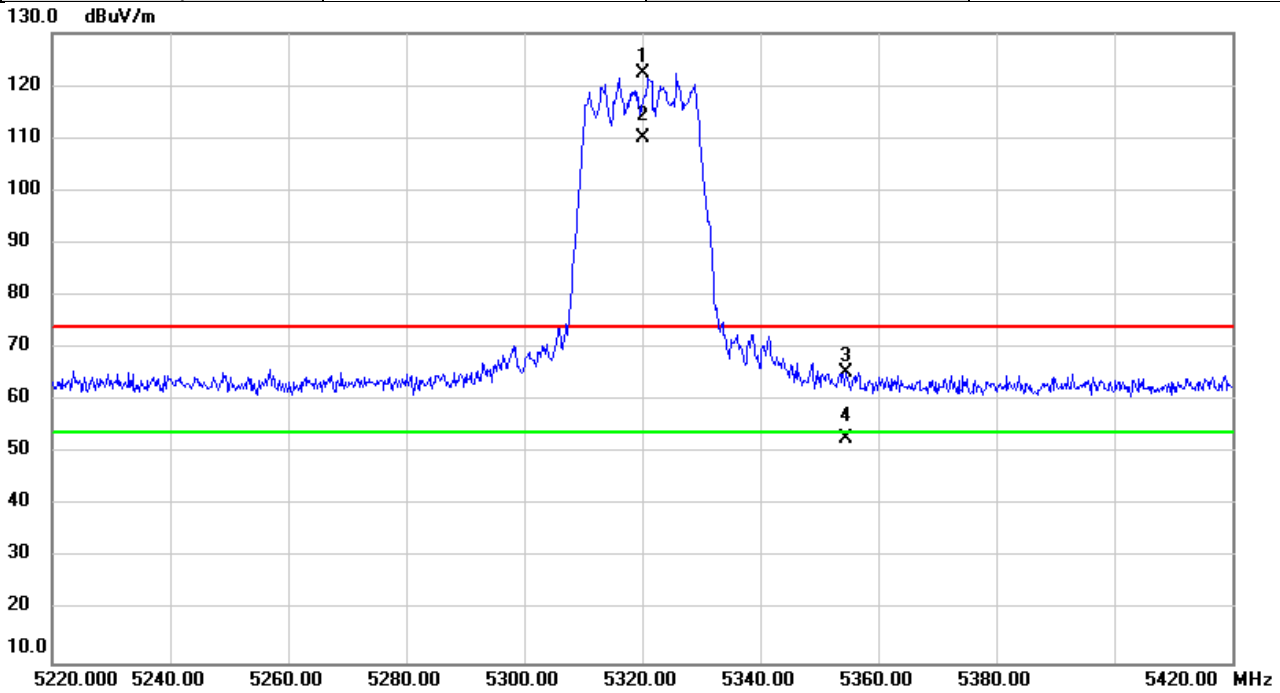


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5320.000	84.79	37.55	122.34	74.00	48.34	peak	NoLimit
2	*	5320.000	72.58	37.55	110.13	54.00	56.13	AVG	NoLimit
3		5354.600	27.77	37.58	65.35	74.00	-8.65	peak	
4		5354.600	15.24	37.58	52.82	54.00	-1.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/4
Test Frequency	5500	Polarization	Vertical
Temp	22°C	Hum.	52%

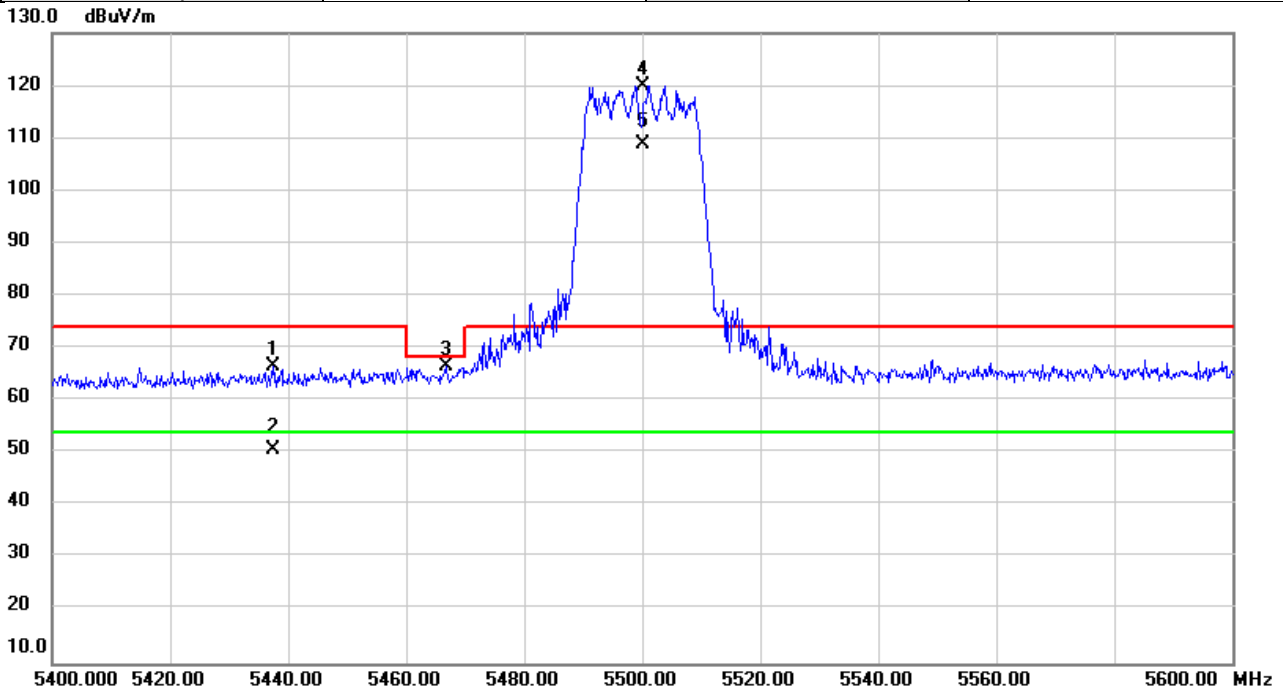


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5437.400	28.83	37.65	66.48	74.00	-7.52	peak	
2		5437.400	13.01	37.65	50.66	54.00	-3.34	AVG	
3		5466.800	28.99	37.68	66.67	68.20	-1.53	peak	
4	X	5500.000	82.31	37.71	120.02	74.00	46.02	peak	NoLimit
5	*	5500.000	71.00	37.71	108.71	54.00	54.71	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/4
Test Frequency	5700	Polarization	Vertical
Temp	22°C	Hum.	52%

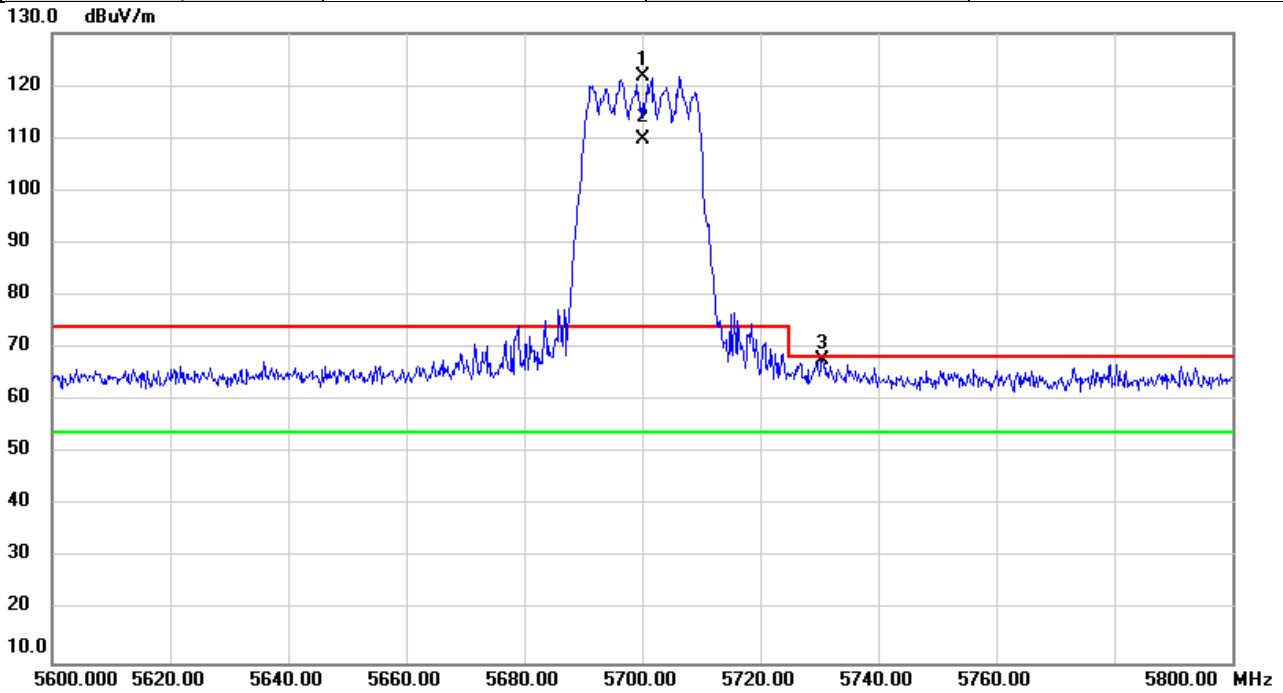


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5700.000	83.56	38.18	121.74	74.00	47.74	peak	NoLimit
2	*	5700.000	71.57	38.18	109.75	54.00	55.75	AVG	NoLimit
3		5730.600	29.53	38.25	67.78	68.20	-0.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/4
Test Frequency	5745	Polarization	Vertical
Temp	22°C	Hum.	52%

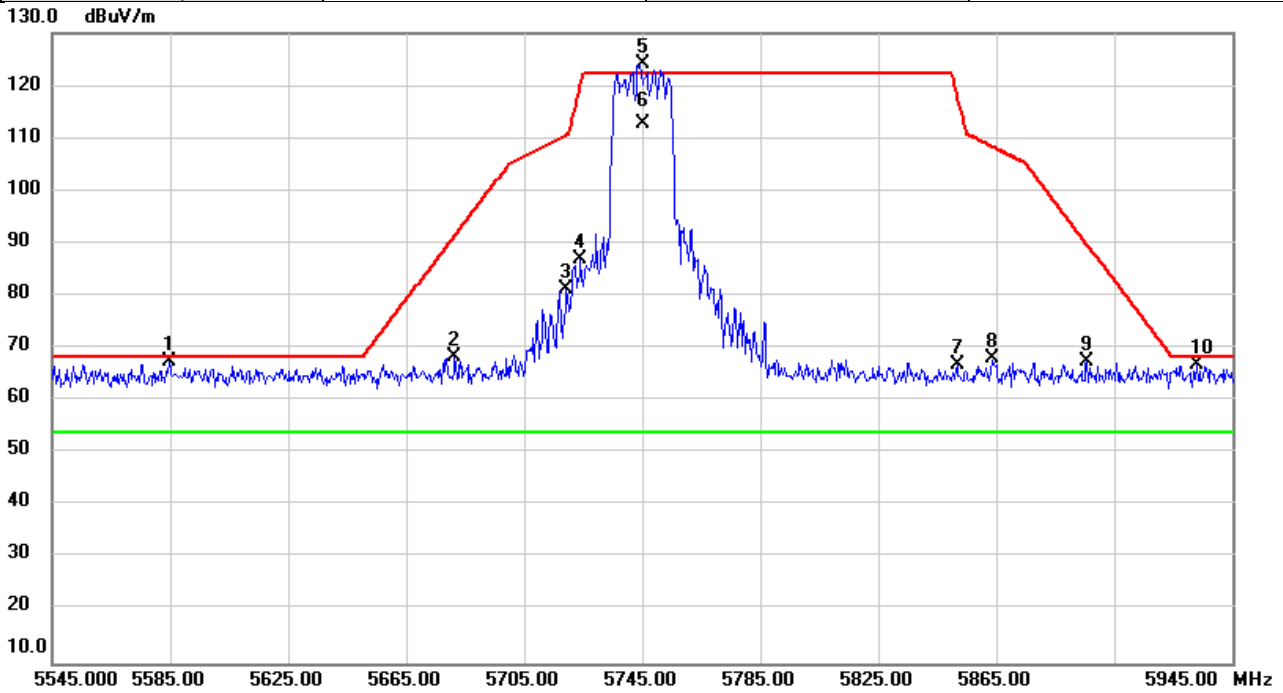


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5584.600	29.42	37.91	67.33	68.20	-0.87	peak	
2		5681.400	30.23	38.13	68.36	91.47	-23.11	peak	
3		5719.400	42.96	38.23	81.19	110.63	-29.44	peak	
4		5724.200	48.78	38.23	87.01	120.38	-33.37	peak	
5	X	5745.000	85.82	38.28	124.10	122.20	1.90	peak	NoLimit
6	*	5745.000	74.49	38.28	112.77	54.00	58.77	AVG	NoLimit
7		5851.800	28.43	38.53	66.96	118.09	-51.13	peak	
8		5863.800	29.34	38.56	67.90	108.33	-40.43	peak	
9		5895.800	28.68	38.63	67.31	89.77	-22.46	peak	
10		5933.000	28.20	38.73	66.93	68.20	-1.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/4
Test Frequency	5825	Polarization	Vertical
Temp	22°C	Hum.	52%

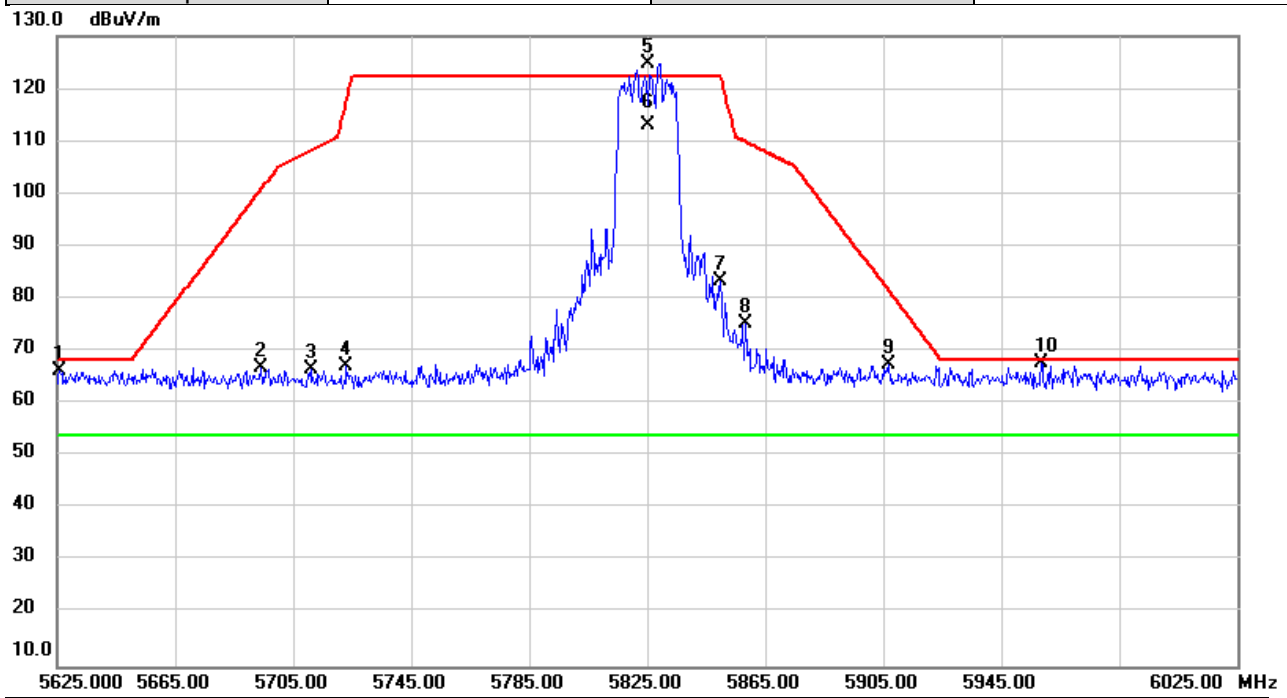

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5625.800	28.34	38.01	66.35	68.20	-1.85	peak	
2		5693.800	28.63	38.16	66.79	100.63	-33.84	peak	
3		5711.000	28.37	38.21	66.58	108.28	-41.70	peak	
4		5723.000	29.05	38.23	67.28	117.64	-50.36	peak	
5	X	5825.000	86.29	38.48	124.77	122.20	2.57	peak	NoLimit
6	*	5825.000	74.42	38.48	112.90	54.00	58.90	AVG	NoLimit
7		5849.800	44.69	38.53	83.22	122.20	-38.98	peak	
8		5858.200	36.64	38.55	75.19	109.90	-34.71	peak	
9		5906.600	28.85	38.66	67.51	81.78	-14.27	peak	
10		5958.600	29.06	38.78	67.84	68.20	-0.36	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/4
Test Frequency	5190	Polarization	Vertical
Temp	22°C	Hum.	52%

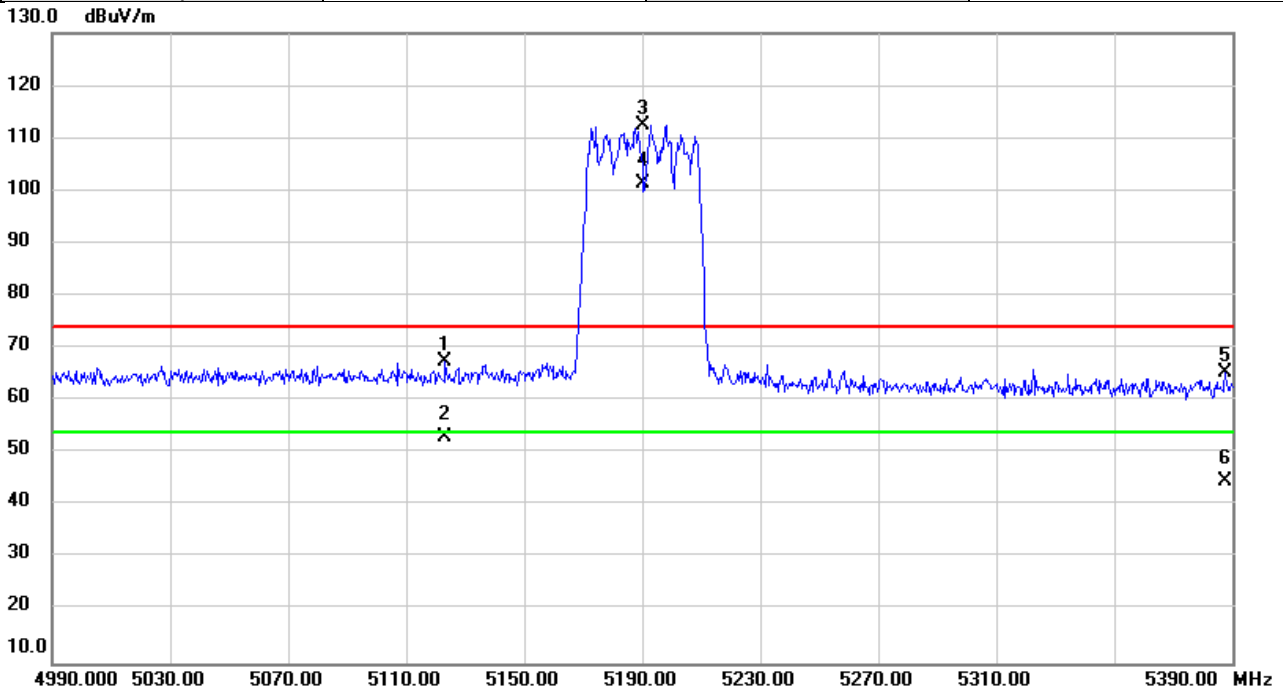


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5123.200	30.13	37.37	67.50	74.00	-6.50	peak	
2		5123.200	15.68	37.37	53.05	54.00	-0.95	AVG	
3	X	5190.000	74.95	37.43	112.38	74.00	38.38	peak	NoLimit
4	*	5190.000	63.79	37.43	101.22	54.00	47.22	AVG	NoLimit
5		5387.600	27.83	37.61	65.44	74.00	-8.56	peak	
6		5387.600	7.15	37.61	44.76	54.00	-9.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/4
Test Frequency	5230	Polarization	Vertical
Temp	22°C	Hum.	52%

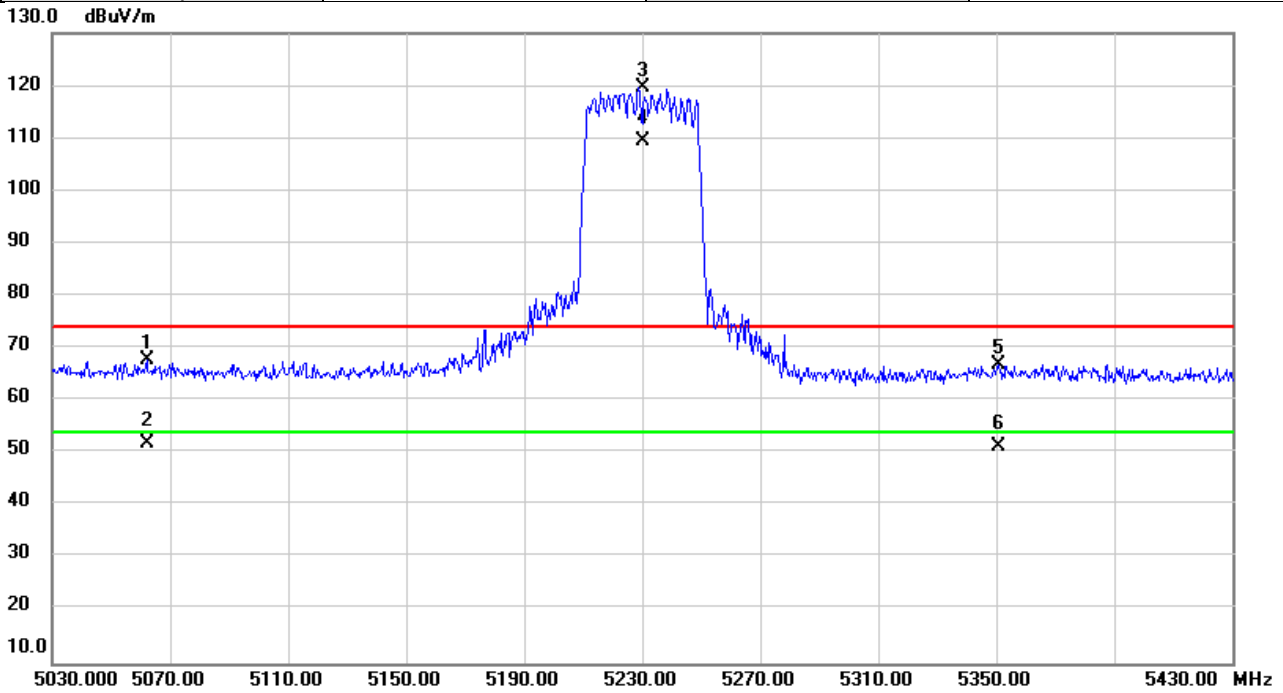


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5062.000	30.53	37.33	67.86	74.00	-6.14	peak	
2		5062.000	14.44	37.33	51.77	54.00	-2.23	AVG	
3	X	5230.000	82.26	37.47	119.73	74.00	45.73	peak	NoLimit
4	*	5230.000	72.04	37.47	109.51	54.00	55.51	AVG	NoLimit
5		5350.800	29.33	37.58	66.91	74.00	-7.09	peak	
6		5350.800	13.57	37.58	51.15	54.00	-2.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/4
Test Frequency	5270	Polarization	Vertical
Temp	22°C	Hum.	52%

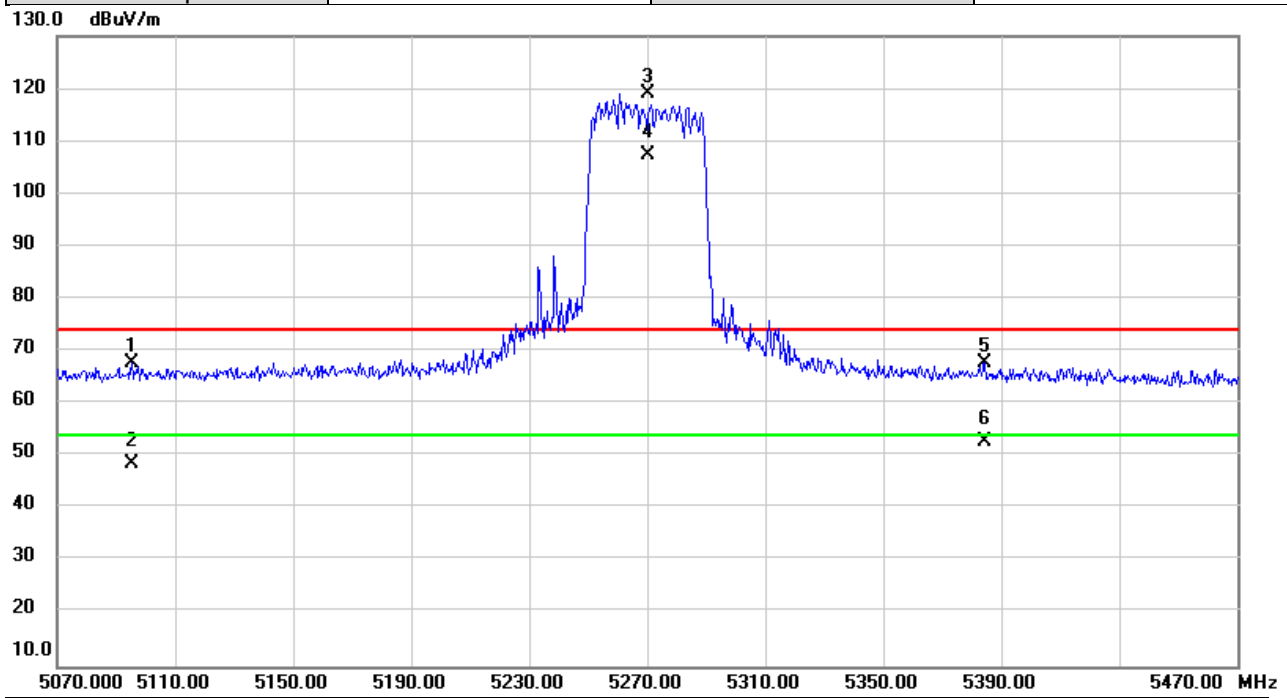


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5095.200	30.40	37.36	67.76	74.00	-6.24	peak	
2		5095.200	11.06	37.36	48.42	54.00	-5.58	AVG	
3	X	5270.000	81.62	37.51	119.13	74.00	45.13	peak	NoLimit
4	*	5270.000	69.85	37.51	107.36	54.00	53.36	AVG	NoLimit
5		5384.400	30.22	37.61	67.83	74.00	-6.17	peak	
6		5384.400	15.20	37.61	52.81	54.00	-1.19	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/4
Test Frequency	5310	Polarization	Vertical
Temp	22°C	Hum.	52%

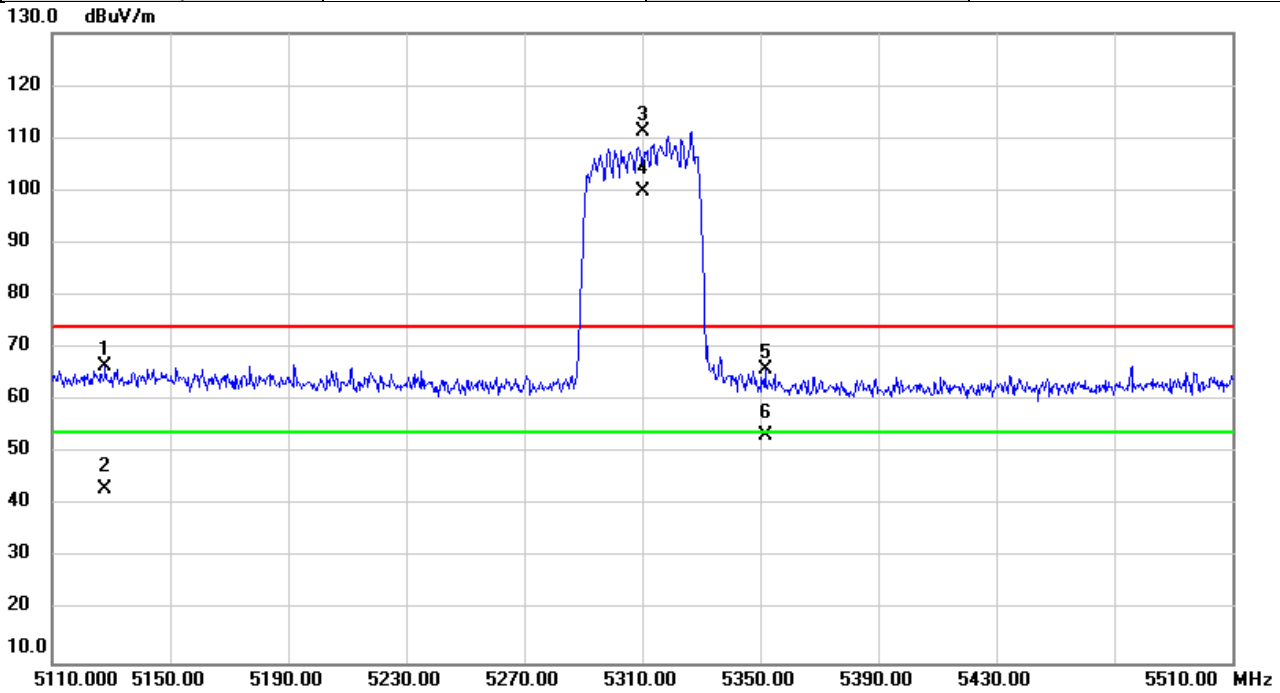


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5128.000	29.17	37.39	66.56	74.00	-7.44	peak	
2		5128.000	5.74	37.39	43.13	54.00	-10.87	AVG	
3	X	5310.000	73.80	37.55	111.35	74.00	37.35	peak	NoLimit
4	*	5310.000	62.24	37.55	99.79	54.00	45.79	AVG	NoLimit
5		5351.600	28.30	37.58	65.88	74.00	-8.12	peak	
6		5351.600	15.81	37.58	53.39	54.00	-0.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/4
Test Frequency	5510	Polarization	Vertical
Temp	22°C	Hum.	52%

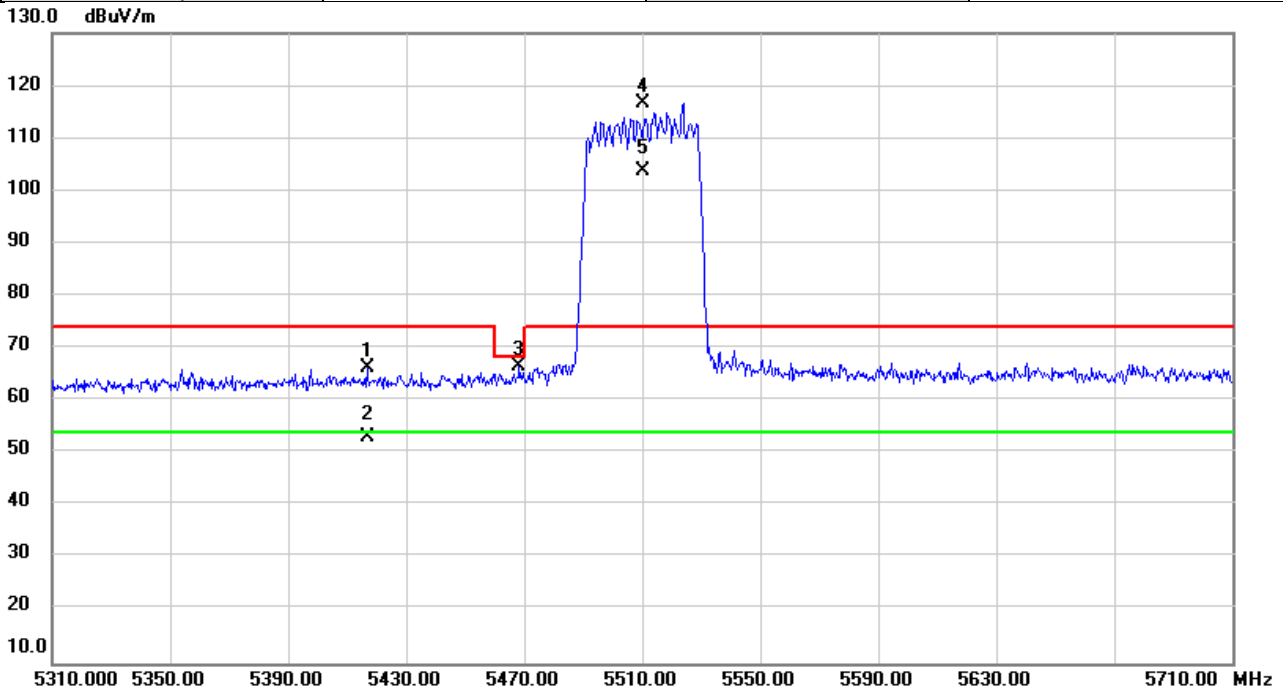


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5416.800	28.52	37.64	66.16	74.00	-7.84	peak	
2		5416.800	15.35	37.64	52.99	54.00	-1.01	AVG	
3		5468.400	28.76	37.68	66.44	68.20	-1.76	peak	
4	X	5510.000	78.90	37.73	116.63	74.00	42.63	peak	NoLimit
5	*	5510.000	66.11	37.73	103.84	54.00	49.84	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/4
Test Frequency	5670	Polarization	Vertical
Temp	22°C	Hum.	52%

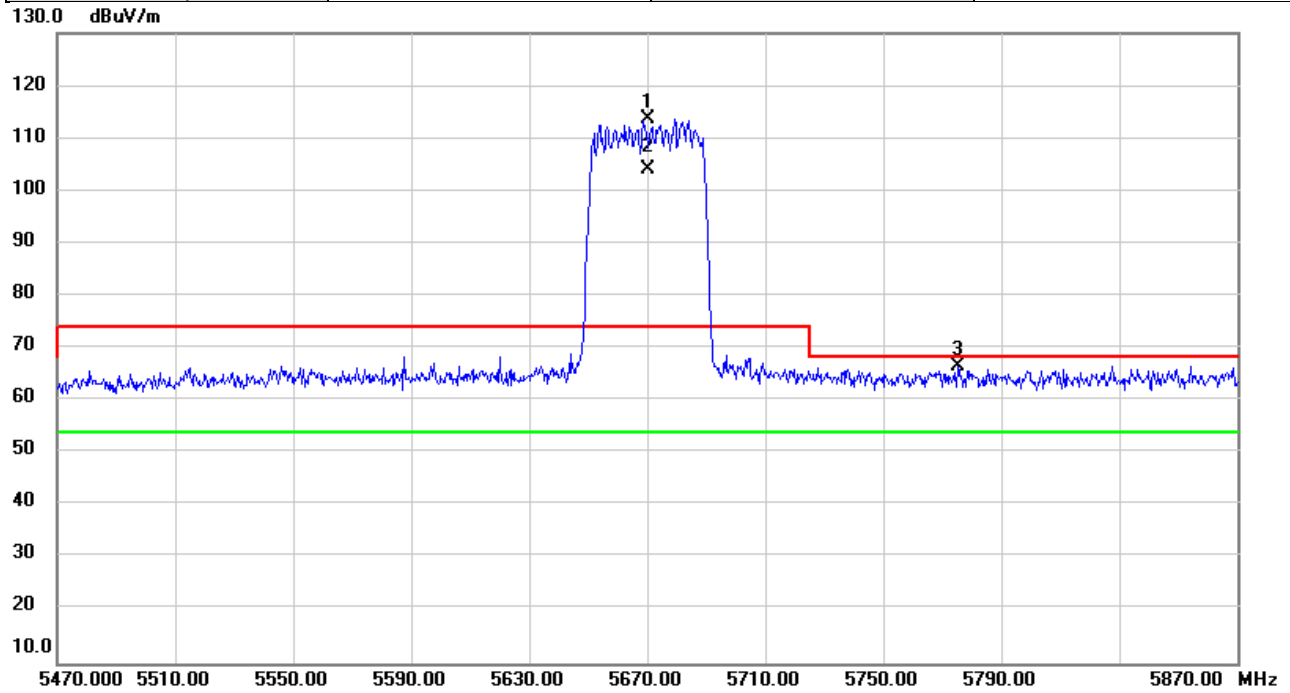


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5670.000	75.41	38.11	113.52	74.00	39.52	peak	NoLimit
2	*	5670.000	66.02	38.11	104.13	54.00	50.13	AVG	NoLimit
3		5775.200	28.27	38.36	66.63	68.20	-1.57	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/4
Test Frequency	5755	Polarization	Vertical
Temp	22°C	Hum.	52%

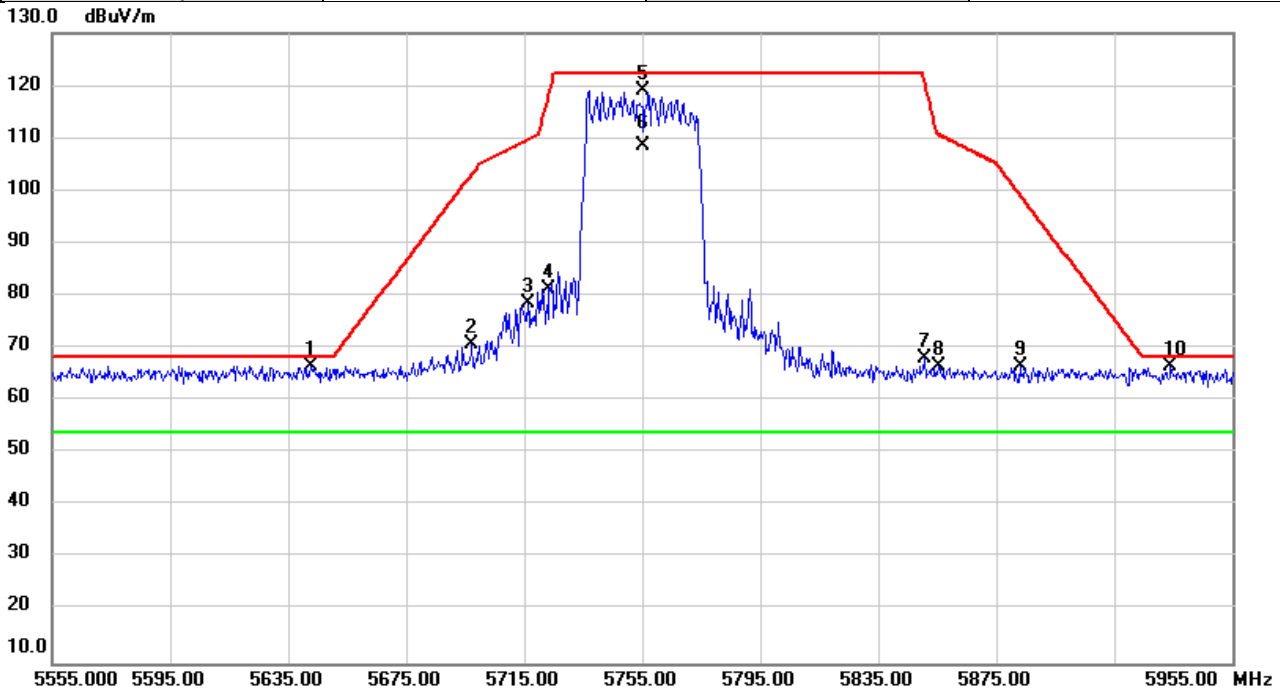


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5642.600	28.63	38.04	66.67	68.20	-1.53	peak	
2		5697.400	32.70	38.18	70.88	103.28	-32.40	peak	
3		5716.200	40.47	38.21	78.68	109.74	-31.06	peak	
4		5723.400	43.08	38.23	81.31	118.55	-37.24	peak	
5		5755.000	80.69	38.31	119.00	122.20	-3.20	peak	NoLimit
6	*	5755.000	70.34	38.31	108.65	54.00	54.65	AVG	NoLimit
7		5850.600	29.64	38.53	68.17	120.83	-52.66	peak	
8		5855.400	27.96	38.54	66.50	110.69	-44.19	peak	
9		5883.000	27.93	38.61	66.54	99.26	-32.72	peak	
10		5934.200	27.74	38.73	66.47	68.20	-1.73	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/4
Test Frequency	5795	Polarization	Vertical
Temp	22°C	Hum.	52%

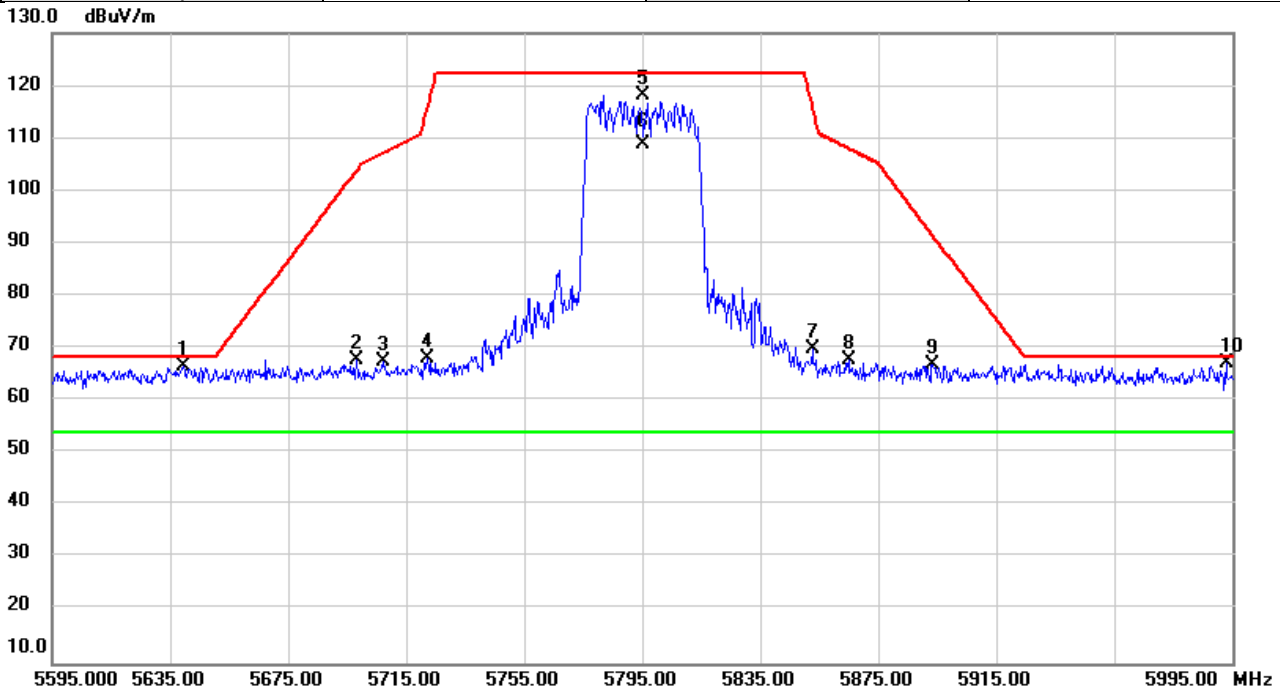


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5639.400	28.49	38.04	66.53	68.20	-1.67	peak	
2		5698.200	29.66	38.18	67.84	103.87	-36.03	peak	
3		5707.000	29.25	38.19	67.44	107.16	-39.72	peak	
4		5722.200	29.74	38.23	67.97	115.82	-47.85	peak	
5		5795.000	79.73	38.40	118.13	122.20	-4.07	peak	NoLimit
6	*	5795.000	70.39	38.40	108.79	54.00	54.79	AVG	NoLimit
7		5852.600	31.22	38.53	69.75	116.27	-46.52	peak	
8		5865.000	29.08	38.56	67.64	108.00	-40.36	peak	
9		5893.400	28.18	38.63	66.81	91.55	-24.74	peak	
10		5993.000	28.42	38.86	67.28	68.20	-0.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/7/4
Test Frequency	5210	Polarization	Vertical
Temp	22°C	Hum.	52%

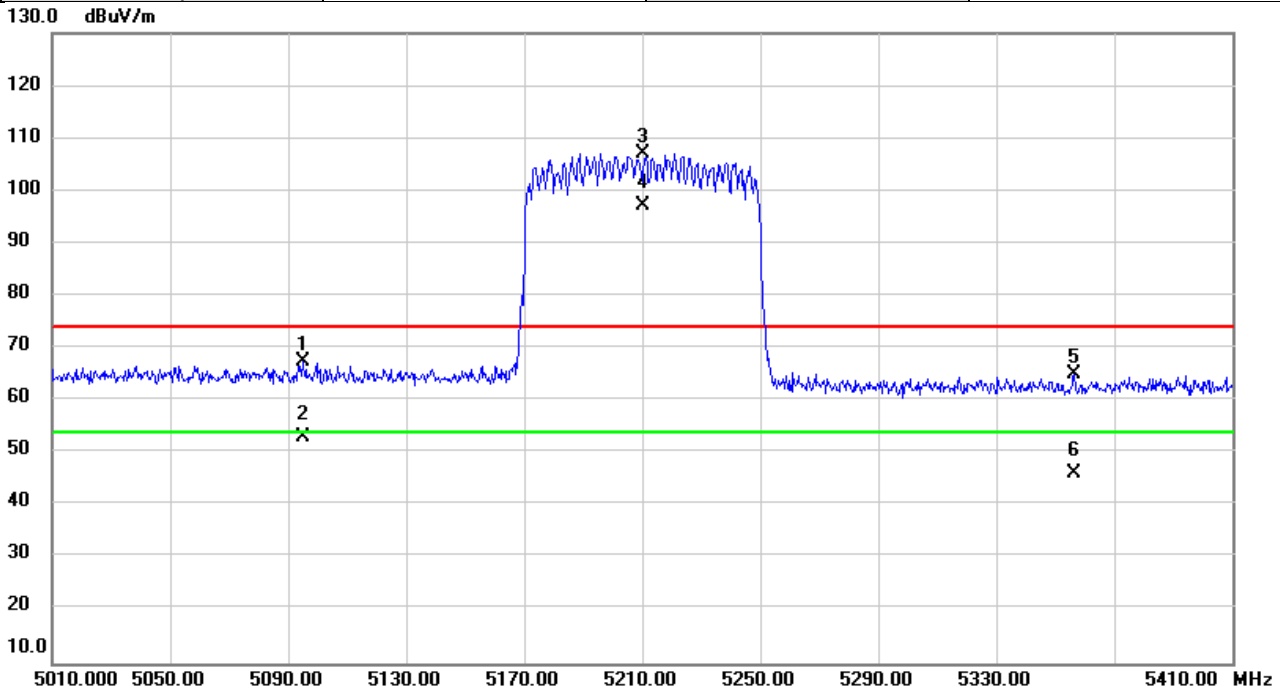


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5094.800	30.21	37.36	67.57	74.00	-6.43	peak	
2		5094.800	15.77	37.36	53.13	54.00	-0.87	AVG	
3	X	5210.000	69.66	37.46	107.12	74.00	33.12	peak	NoLimit
4	*	5210.000	59.72	37.46	97.18	54.00	43.18	AVG	NoLimit
5		5356.400	27.36	37.58	64.94	74.00	-9.06	peak	
6		5356.400	8.43	37.58	46.01	54.00	-7.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/7/4
Test Frequency	5290	Polarization	Vertical
Temp	22°C	Hum.	52%

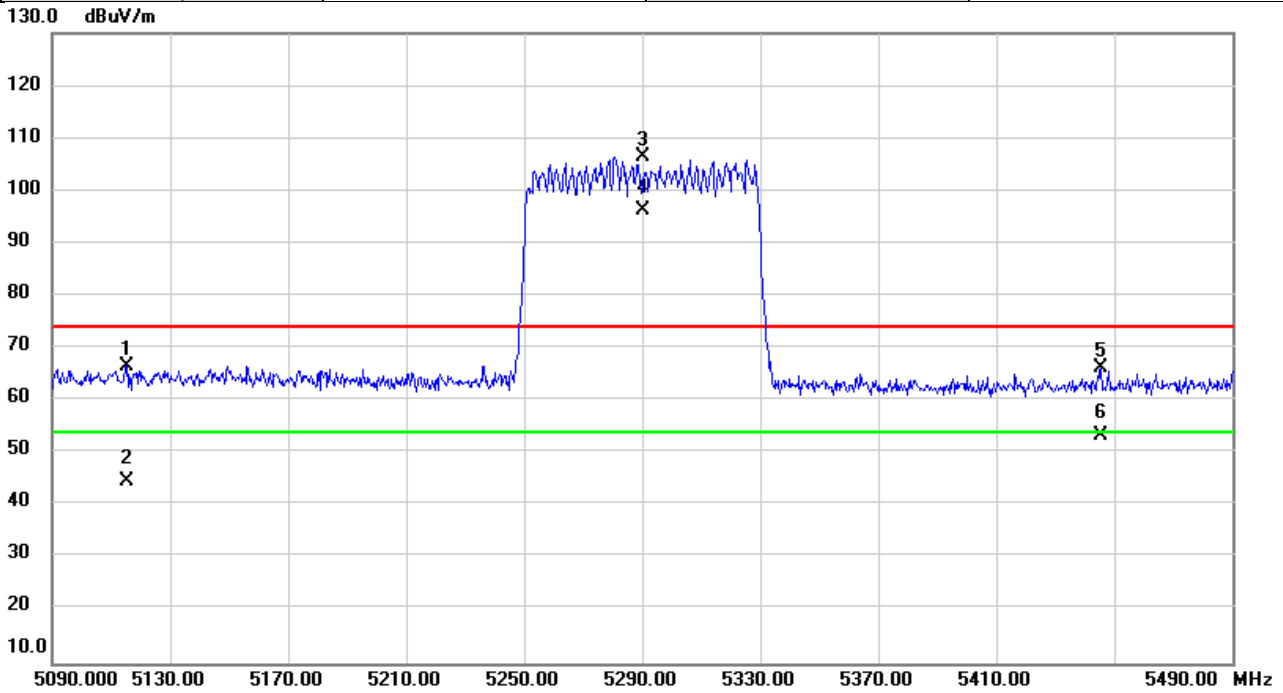


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5115.200	29.31	37.37	66.68	74.00	-7.32	peak	
2		5115.200	7.29	37.37	44.66	54.00	-9.34	AVG	
3	X	5290.000	68.80	37.52	106.32	74.00	32.32	peak	NoLimit
4	*	5290.000	58.62	37.52	96.14	54.00	42.14	AVG	NoLimit
5		5445.600	28.52	37.66	66.18	74.00	-7.82	peak	
6		5445.600	15.57	37.66	53.23	54.00	-0.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/7/4
Test Frequency	5530	Polarization	Vertical
Temp	22°C	Hum.	52%

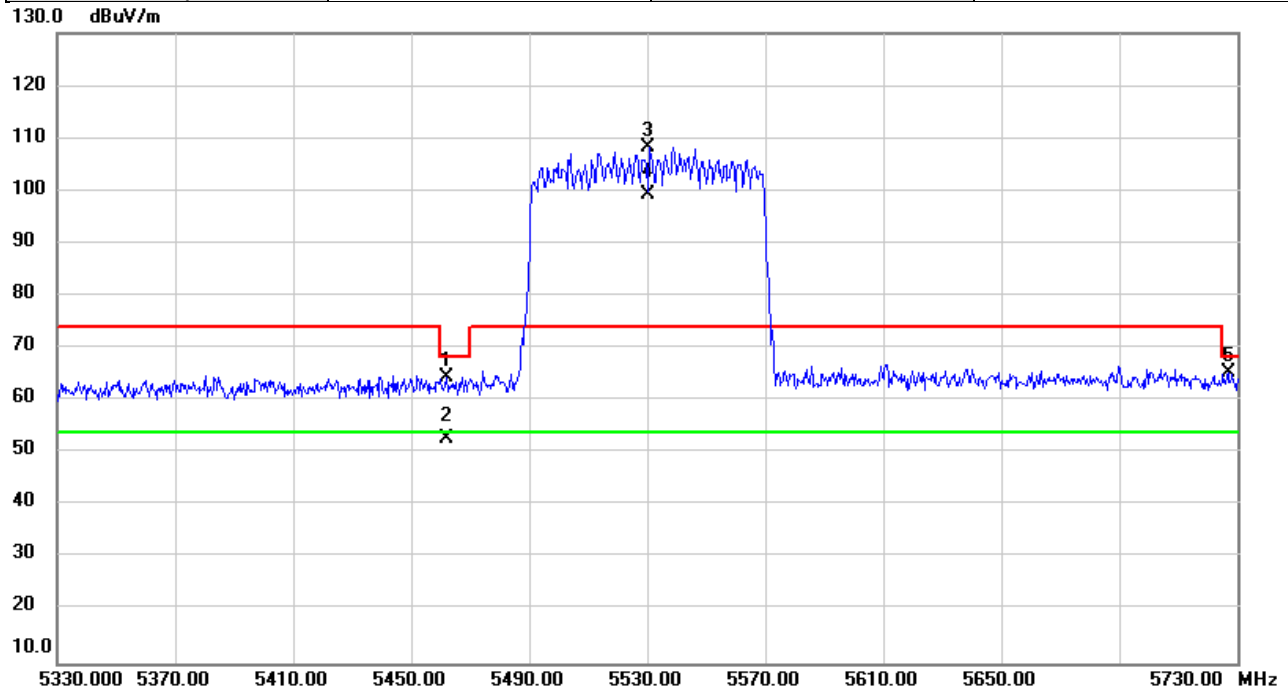


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5462.000	26.76	37.68	64.44	68.20	-3.76	peak	
2		5462.000	14.94	37.68	52.62	54.00	-1.38	AVG	
3	X	5530.000	70.59	37.78	108.37	74.00	34.37	peak	NoLimit
4	*	5530.000	61.43	37.78	99.21	54.00	45.21	AVG	NoLimit
5		5726.800	27.01	38.24	65.25	68.20	-2.95	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/7/4
Test Frequency	5610	Polarization	Vertical
Temp	22°C	Hum.	52%

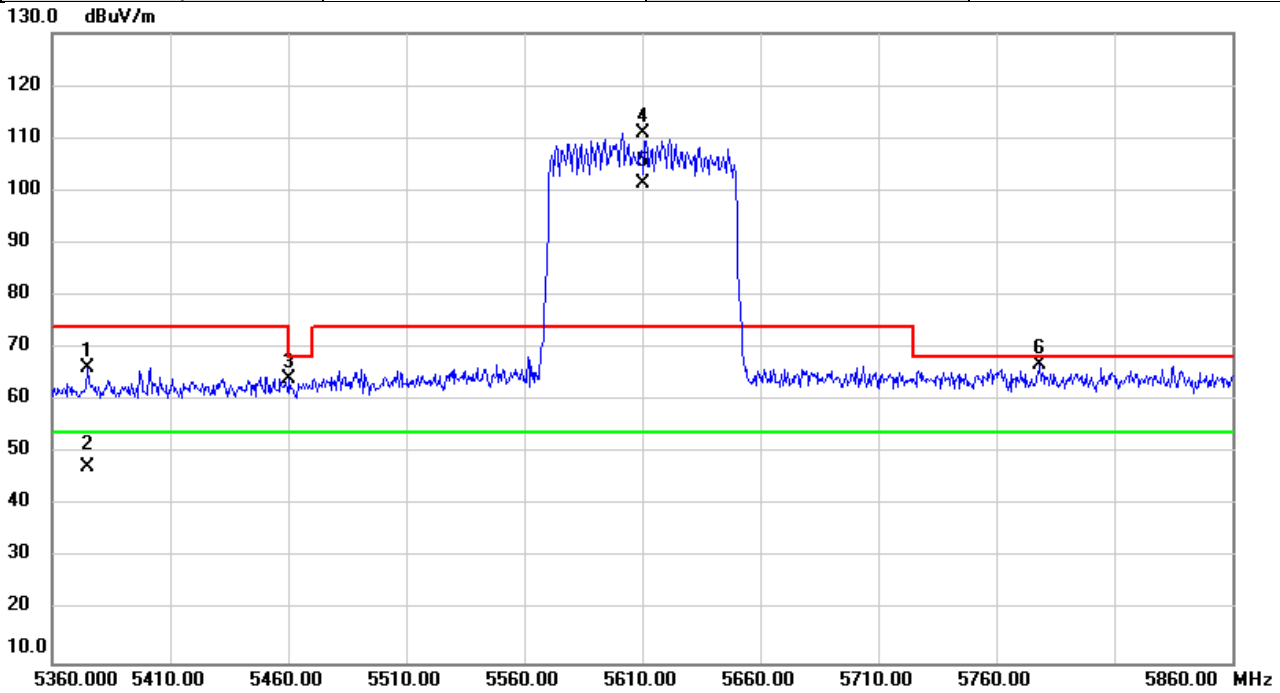


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5375.000	28.66	37.59	66.25	74.00	-7.75	peak	
2		5375.000	9.62	37.59	47.21	54.00	-6.79	AVG	
3		5460.500	26.57	37.68	64.25	68.20	-3.95	peak	
4	X	5610.000	73.04	37.96	111.00	74.00	37.00	peak	NoLimit
5	*	5610.000	63.29	37.96	101.25	54.00	47.25	AVG	NoLimit
6		5778.500	28.34	38.36	66.70	68.20	-1.50	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/7/4
Test Frequency	5775	Polarization	Vertical
Temp	22°C	Hum.	52%

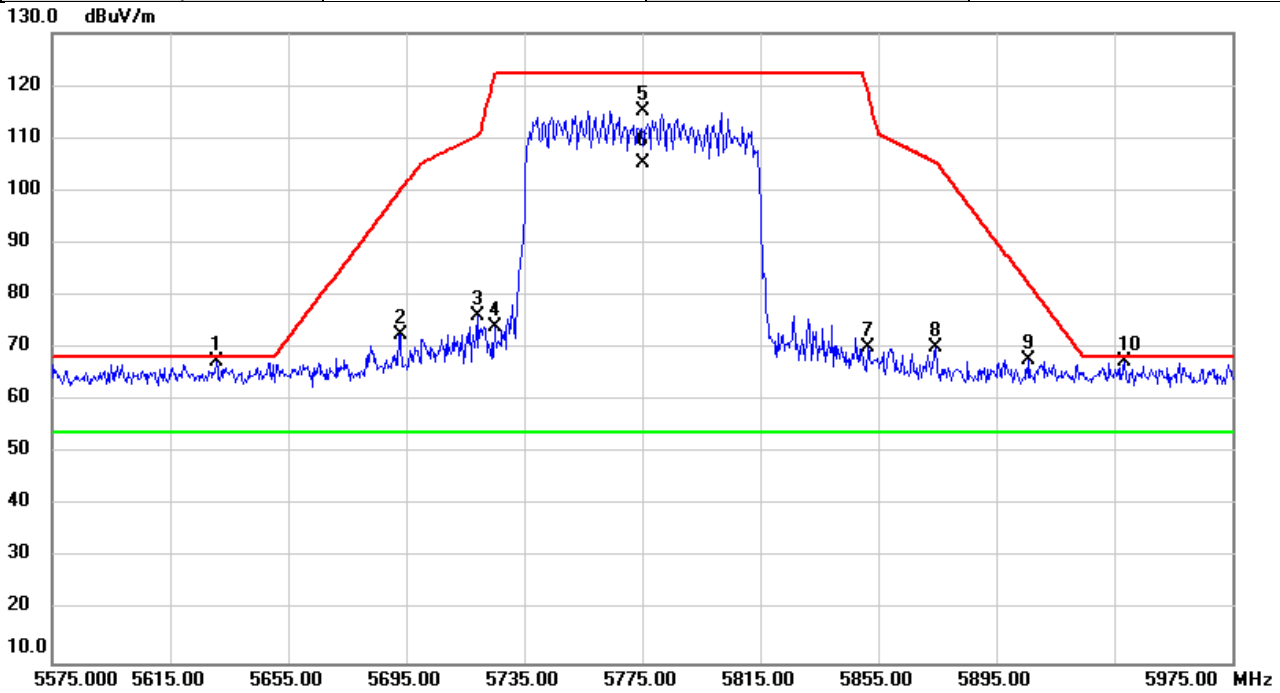


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5630.600	29.57	38.01	67.58	68.20	-0.62	peak	
2		5693.000	34.39	38.16	72.55	100.04	-27.49	peak	
3		5719.000	38.01	38.23	76.24	110.52	-34.28	peak	
4		5725.000	35.87	38.24	74.11	122.20	-48.09	peak	
5		5775.000	76.92	38.35	115.27	122.20	-6.93	peak	NoLimit
6	*	5775.000	67.00	38.35	105.35	54.00	51.35	AVG	NoLimit
7		5851.400	31.50	38.53	70.03	119.01	-48.98	peak	
8		5874.600	31.64	38.58	70.22	105.31	-35.09	peak	
9		5906.200	29.13	38.66	67.79	82.08	-14.29	peak	
10		5938.600	28.60	38.73	67.33	68.20	-0.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW160)	Test Date	2020/7/4
Test Frequency	5250	Polarization	Vertical
Temp	22°C	Hum.	52%

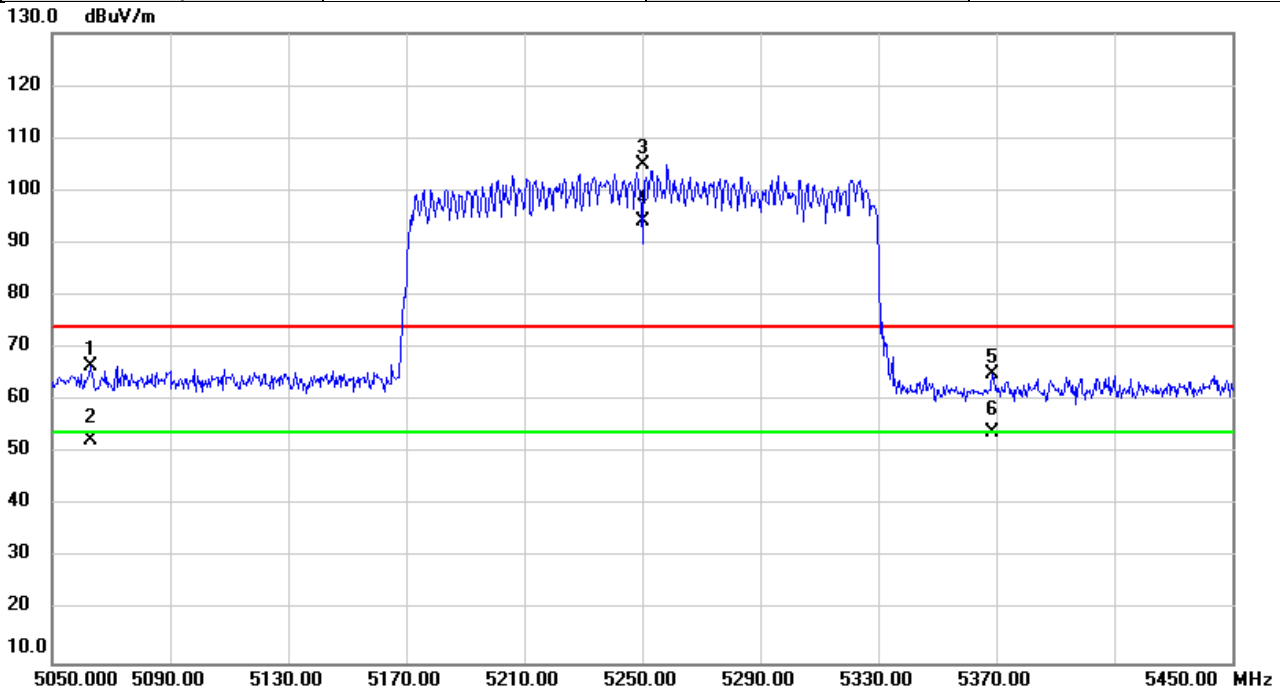


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5062.800	29.33	37.33	66.66	74.00	-7.34	peak	
2		5062.800	15.08	37.33	52.41	54.00	-1.59	AVG	
3	X	5250.000	67.59	37.49	105.08	74.00	31.08	peak	NoLimit
4	*	5250.000	56.57	37.49	94.06	54.00	40.06	AVG	NoLimit
5		5368.800	27.40	37.59	64.99	74.00	-9.01	peak	
6		5368.800	16.26	37.59	53.85	54.00	-0.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ax (HEW160)	Test Date	2020/7/4
Test Frequency	5570	Polarization	Vertical
Temp	22°C	Hum.	52%

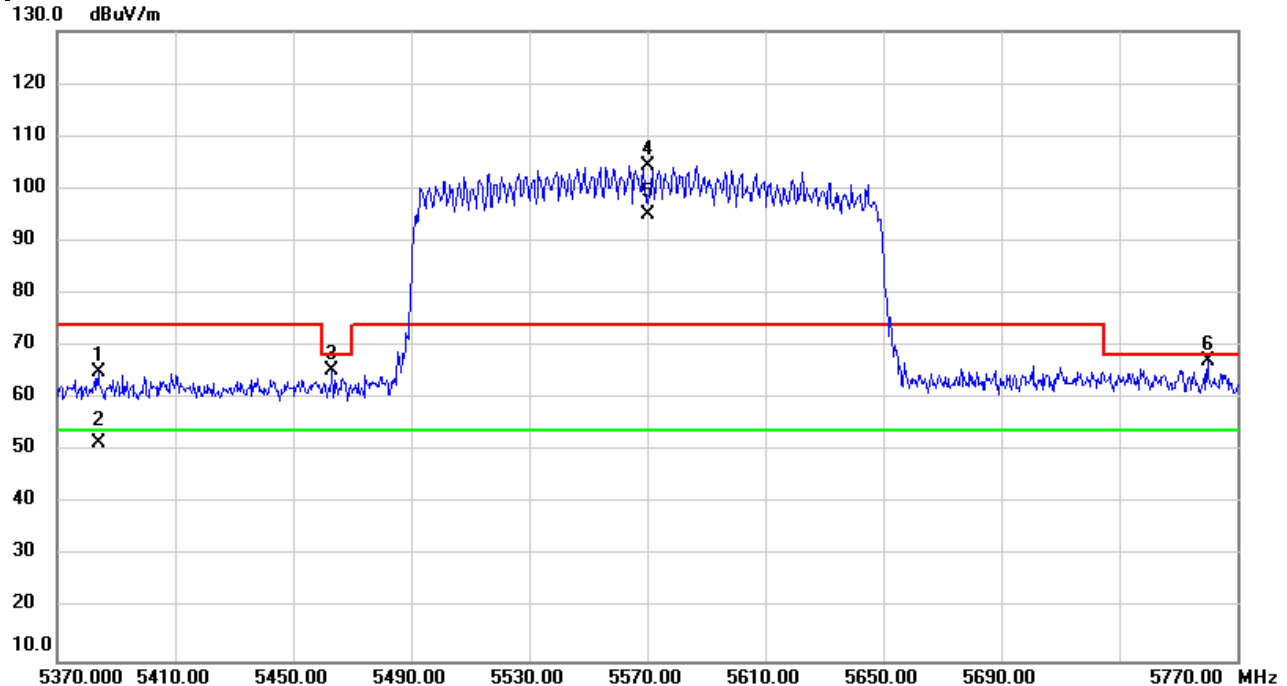

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5384.000	27.46	37.61	65.07	74.00	-8.93	peak	
2		5384.000	14.04	37.61	51.65	54.00	-2.35	AVG	
3		5463.200	27.65	37.68	65.33	68.20	-2.87	peak	
4	X	5570.000	66.56	37.88	104.44	74.00	30.44	peak	NoLimit
5	*	5570.000	57.11	37.88	94.99	54.00	40.99	AVG	NoLimit
6		5760.000	28.75	38.31	67.06	68.20	-1.14	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5180	Polarization	Vertical
Temp	22°C	Hum.	52%

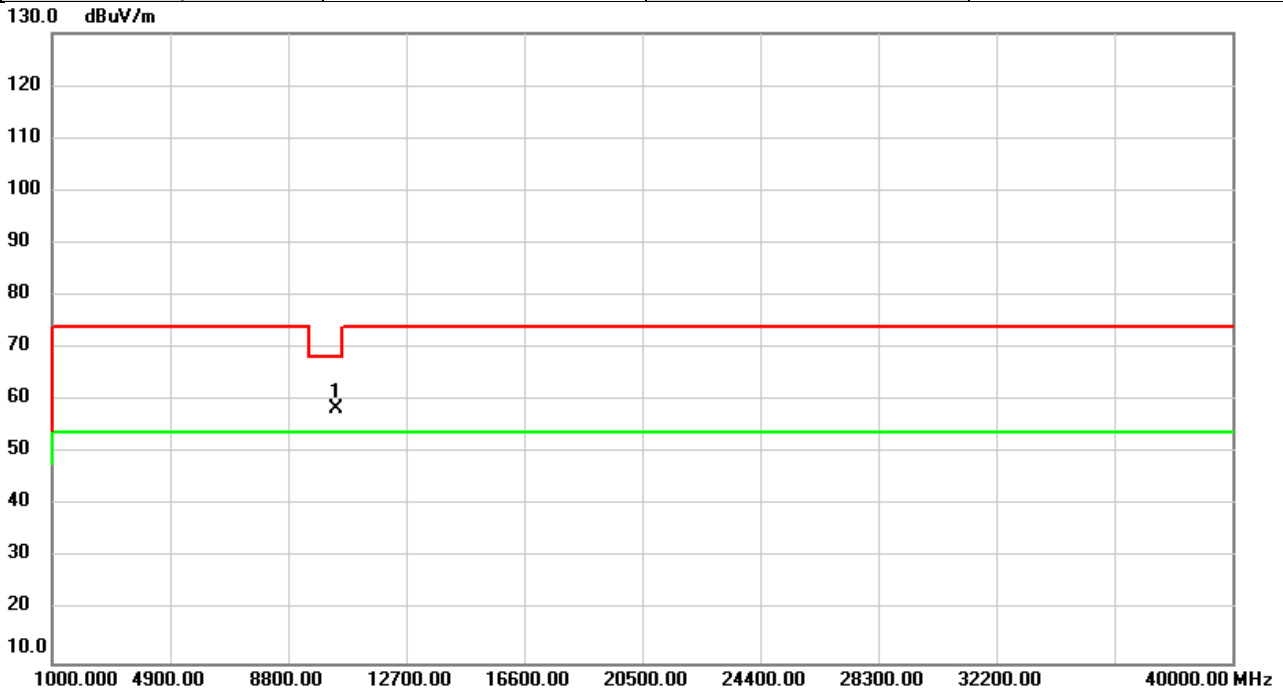


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	53.62	4.73	58.35	68.20	-9.85	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5180	Polarization	Horizontal
Temp	22°C	Hum.	52%

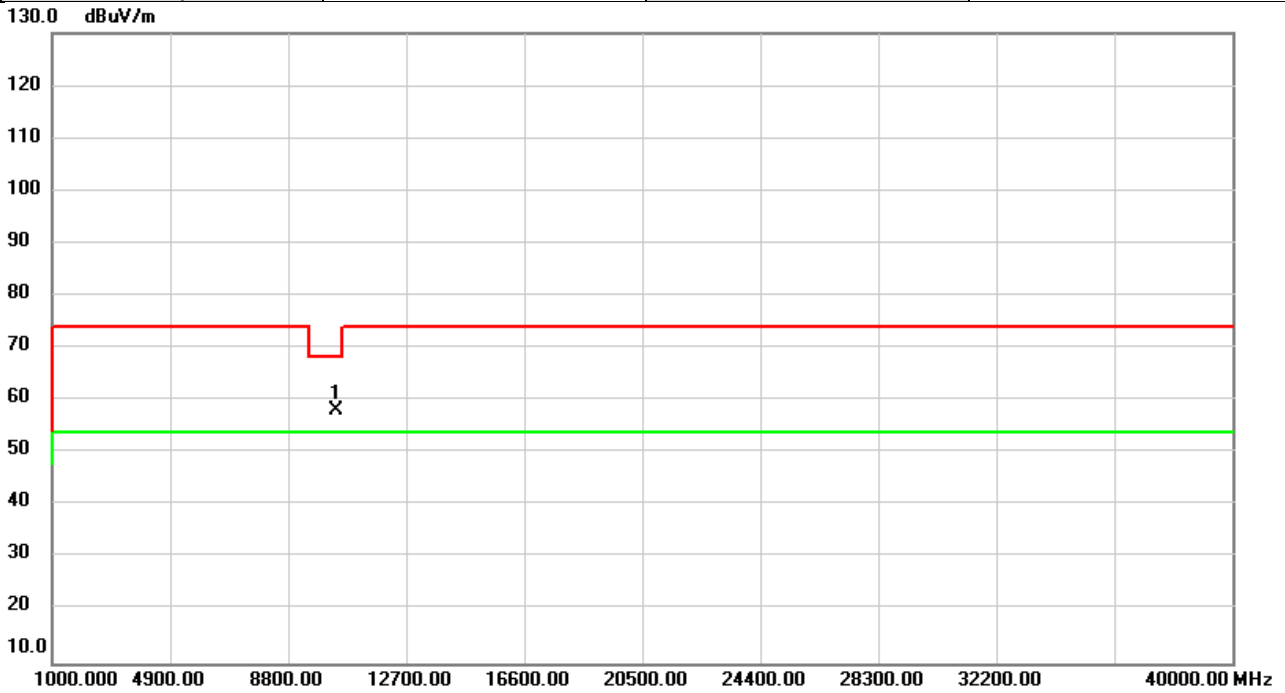


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	53.55	4.73	58.28	68.20	-9.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5200	Polarization	Vertical
Temp	22°C	Hum.	52%

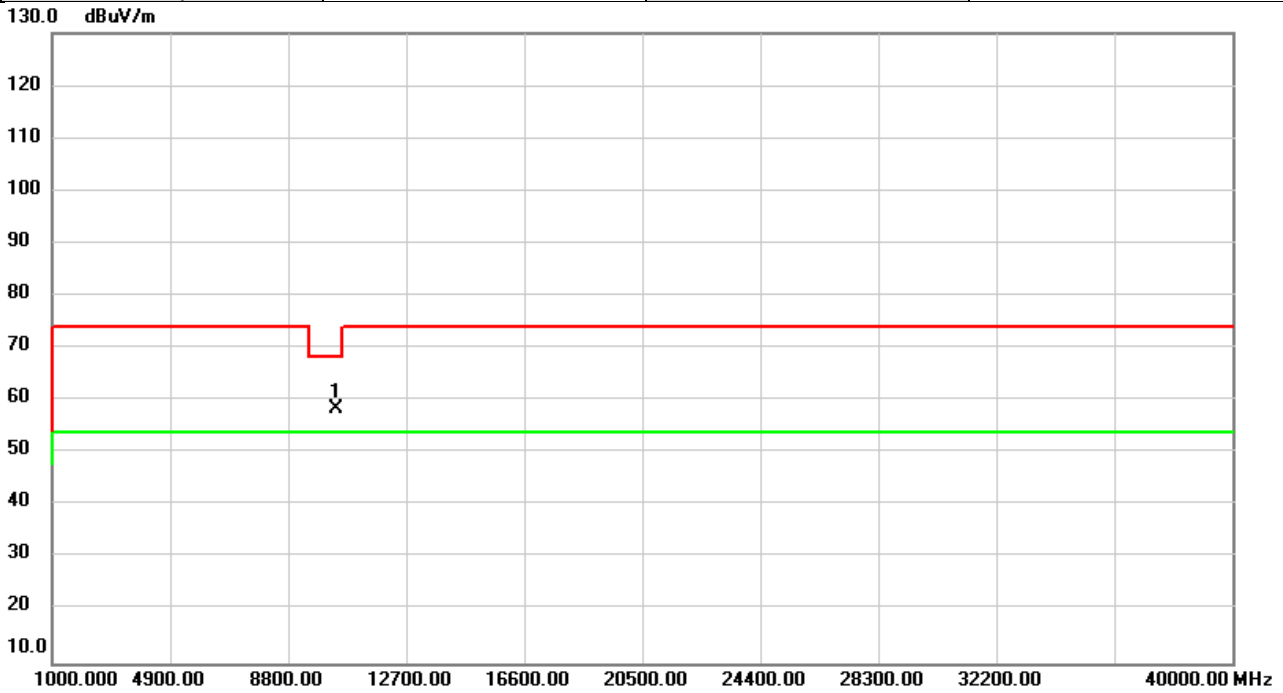


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	53.52	4.80	58.32	68.20	-9.88	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5200	Polarization	Horizontal
Temp	22°C	Hum.	52%

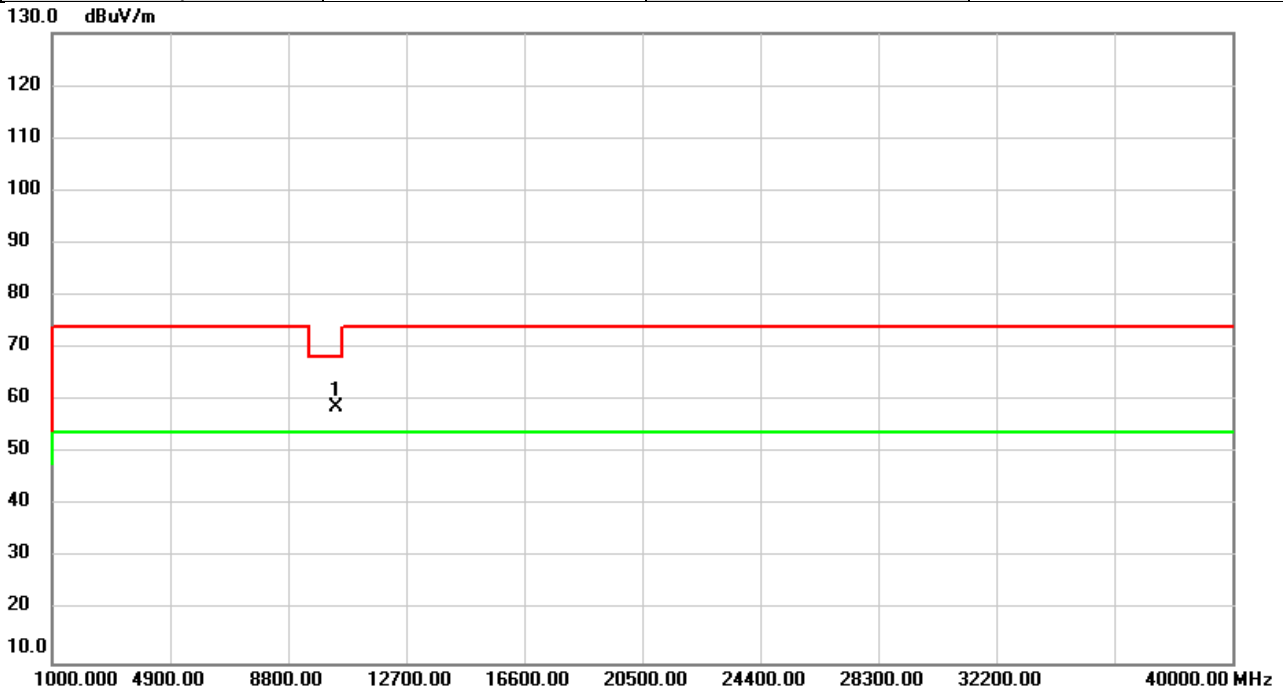


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	54.09	4.80	58.89	68.20	-9.31	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5240	Polarization	Vertical
Temp	22°C	Hum.	52%

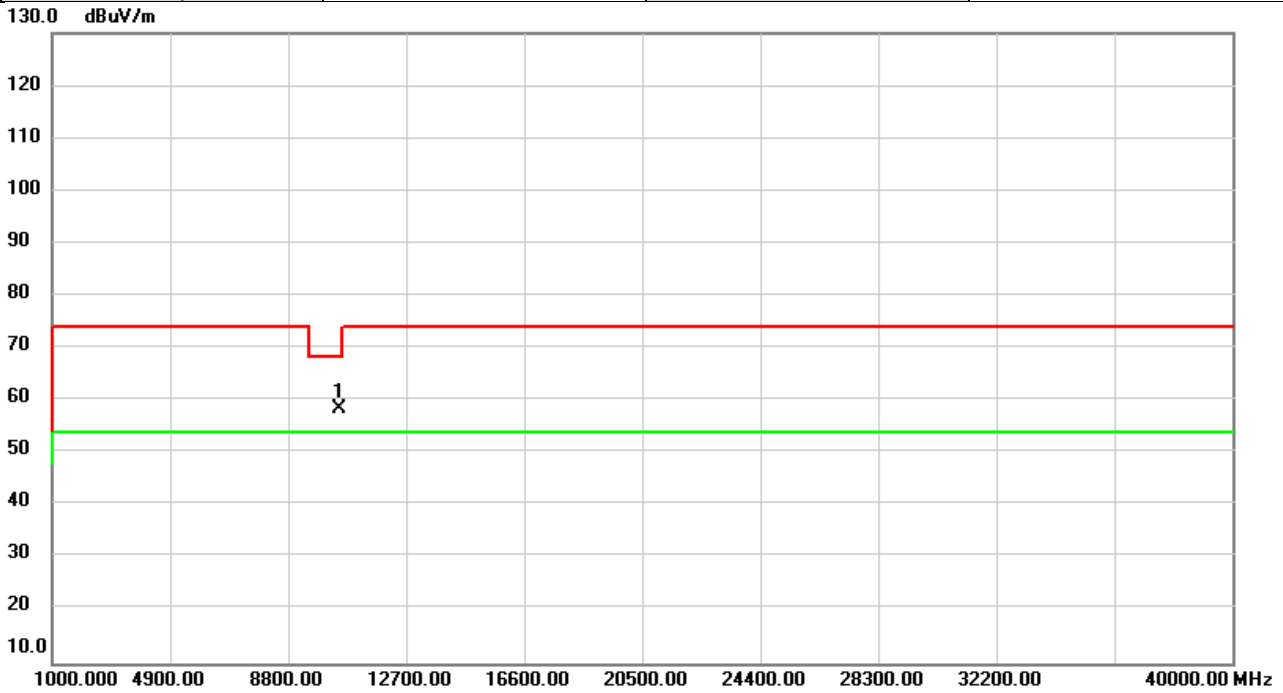


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	53.42	4.96	58.38	68.20	-9.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5240	Polarization	Horizontal
Temp	22°C	Hum.	52%

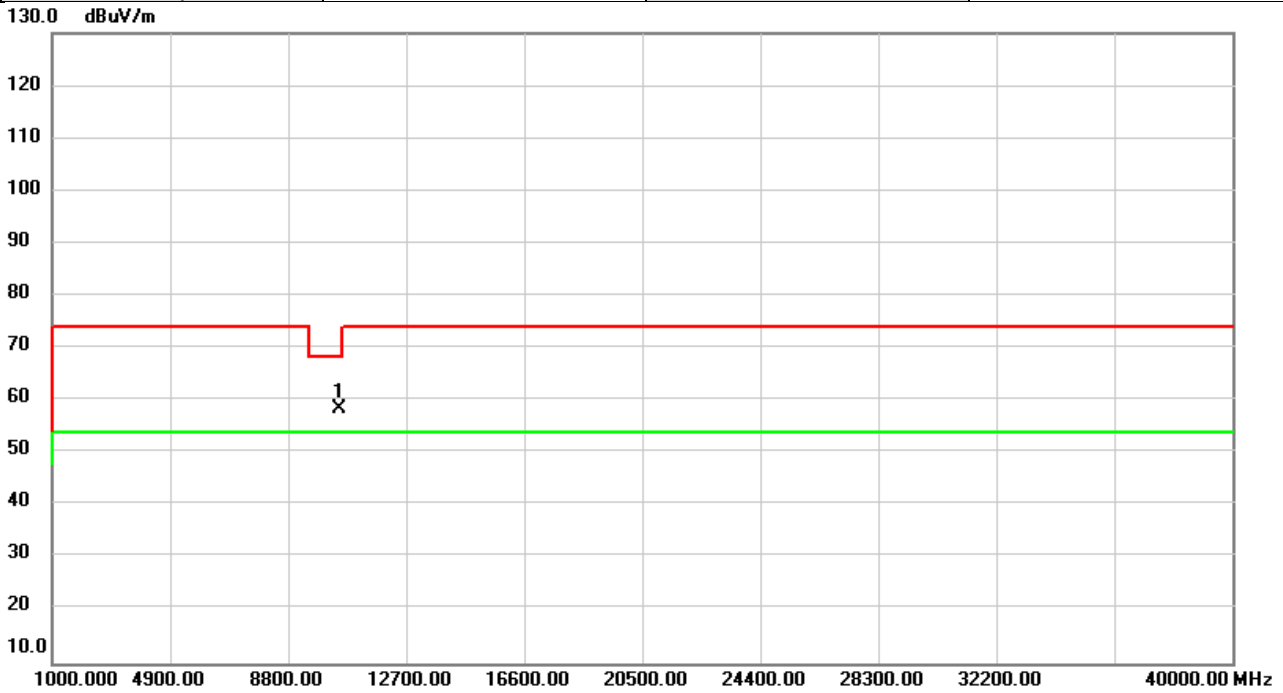


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	53.59	4.96	58.55	68.20	-9.65	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5260	Polarization	Vertical
Temp	22°C	Hum.	52%

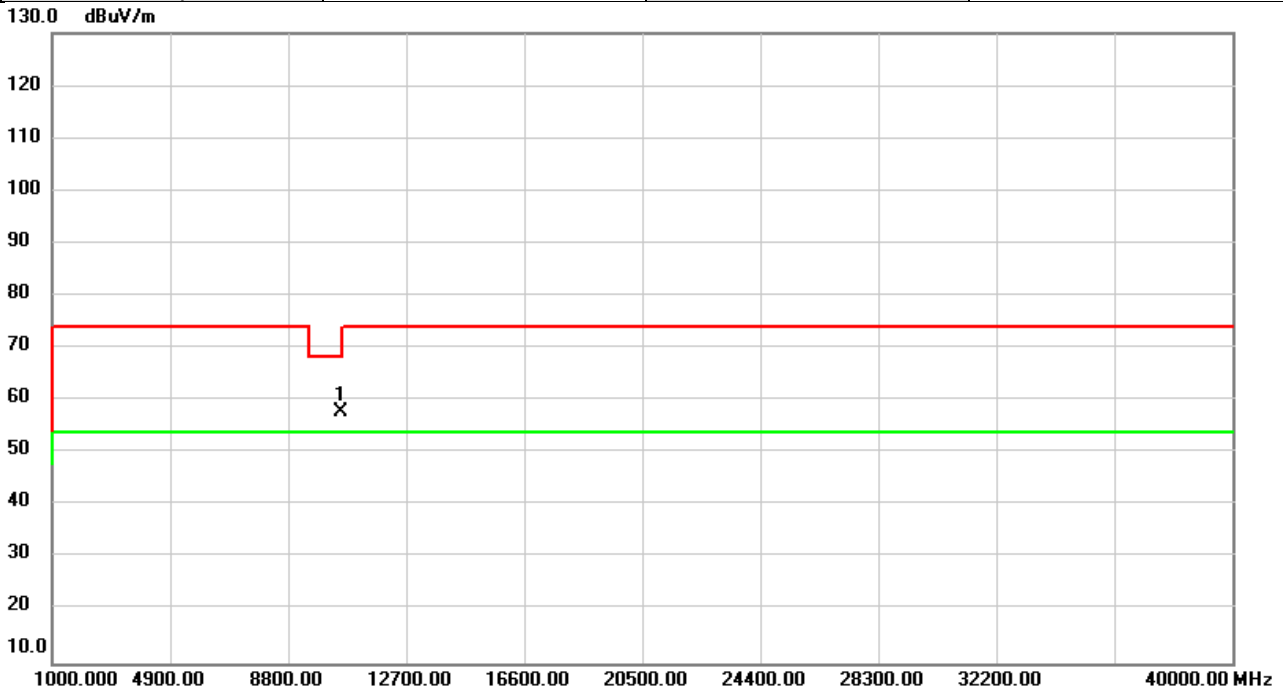


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	52.69	5.06	57.75	68.20	-10.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5260	Polarization	Horizontal
Temp	22°C	Hum.	52%

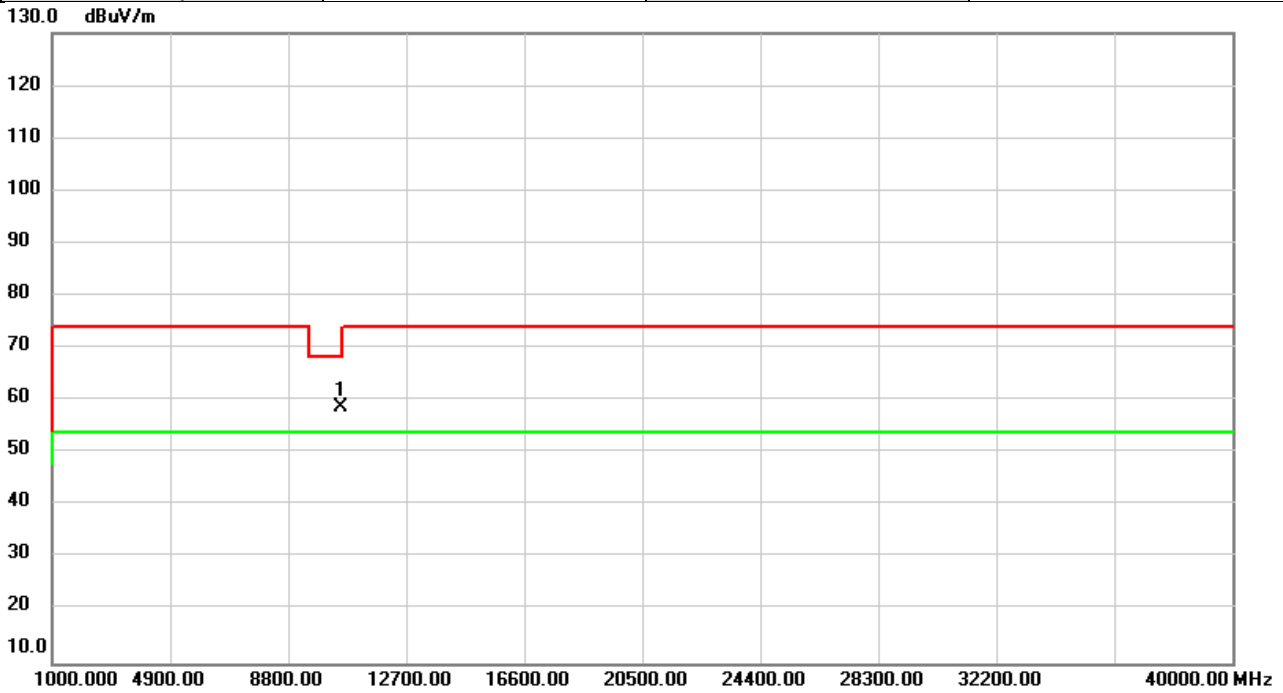


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	53.75	5.06	58.81	68.20	-9.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5300	Polarization	Vertical
Temp	22°C	Hum.	52%

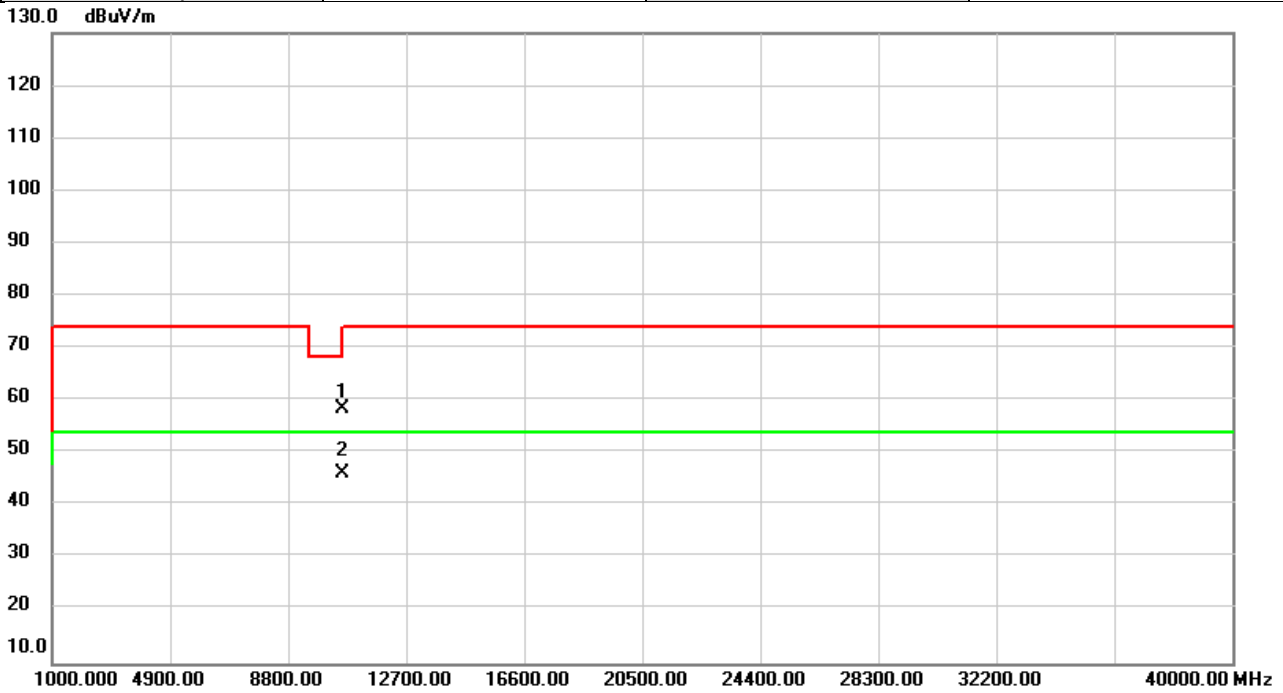


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10600.00	53.25	5.31	58.56	68.20	-9.64	peak	
2	*	10600.00	40.76	5.31	46.07	54.00	-7.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5300	Polarization	Horizontal
Temp	22°C	Hum.	52%

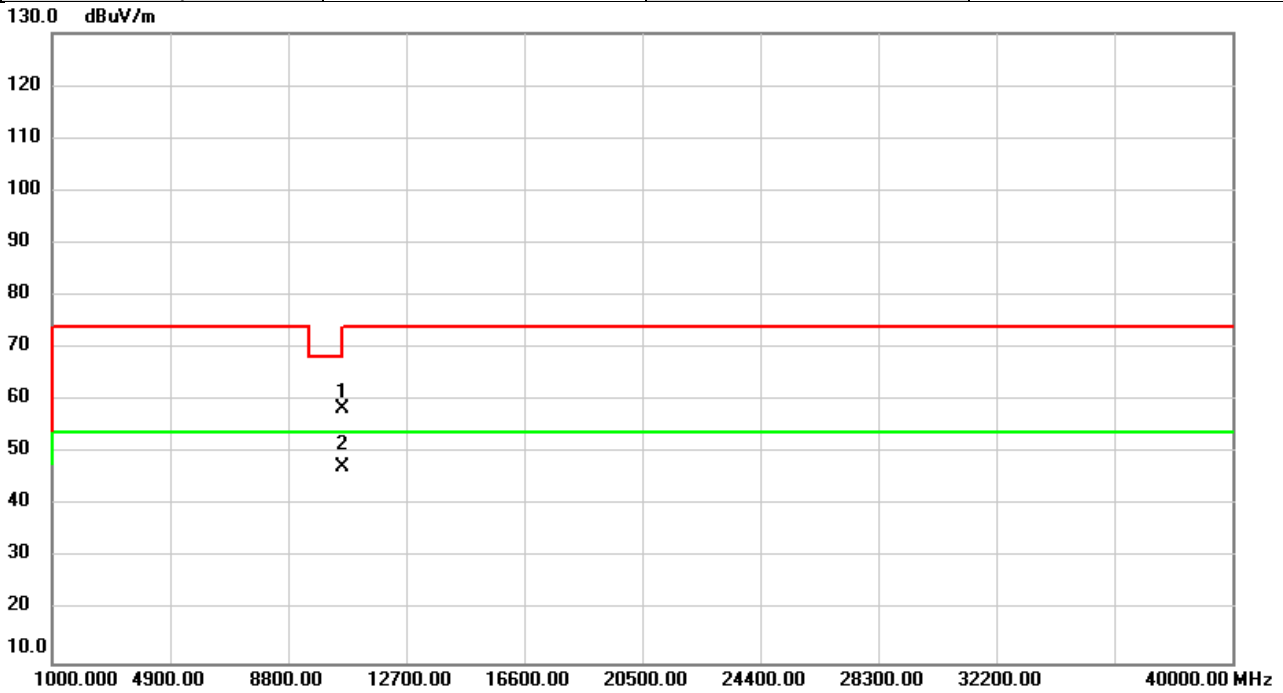


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10600.00	53.23	5.31	58.54	68.20	-9.66	peak	
2	*	10600.00	42.11	5.31	47.42	54.00	-6.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5320	Polarization	Vertical
Temp	22°C	Hum.	52%

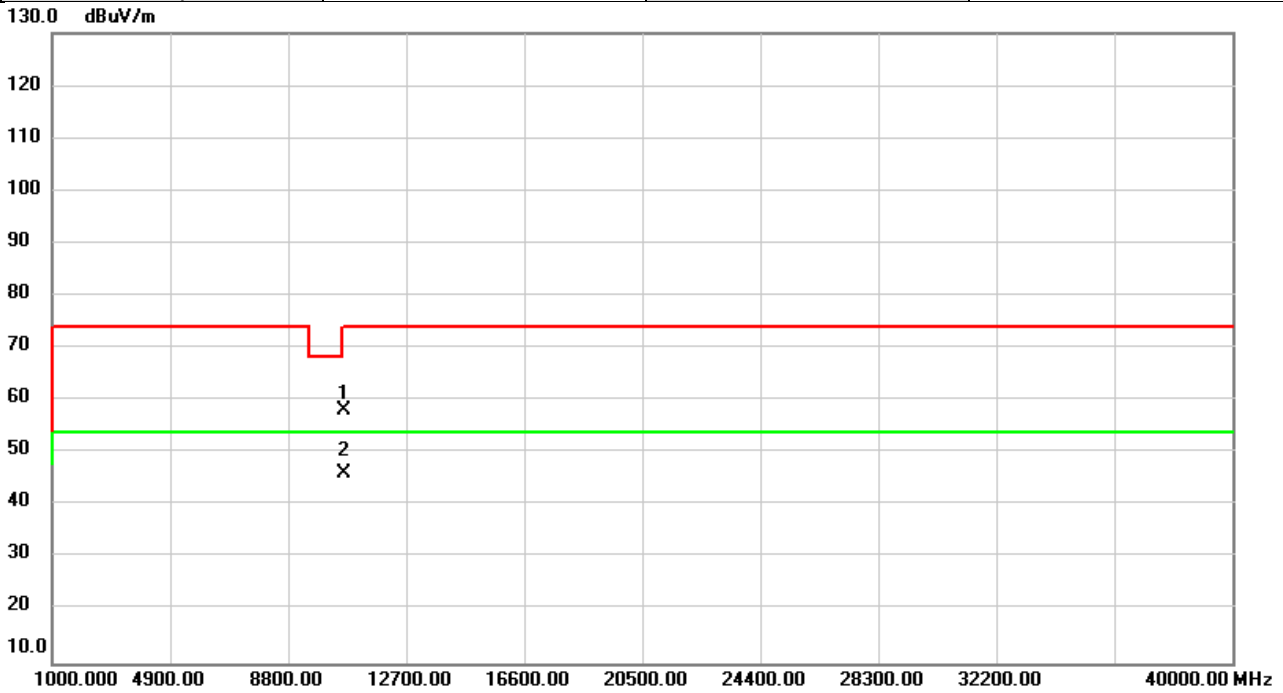


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	52.70	5.43	58.13	74.00	-15.87	peak	
2	*	10640.00	40.79	5.43	46.22	54.00	-7.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5320	Polarization	Horizontal
Temp	22°C	Hum.	52%

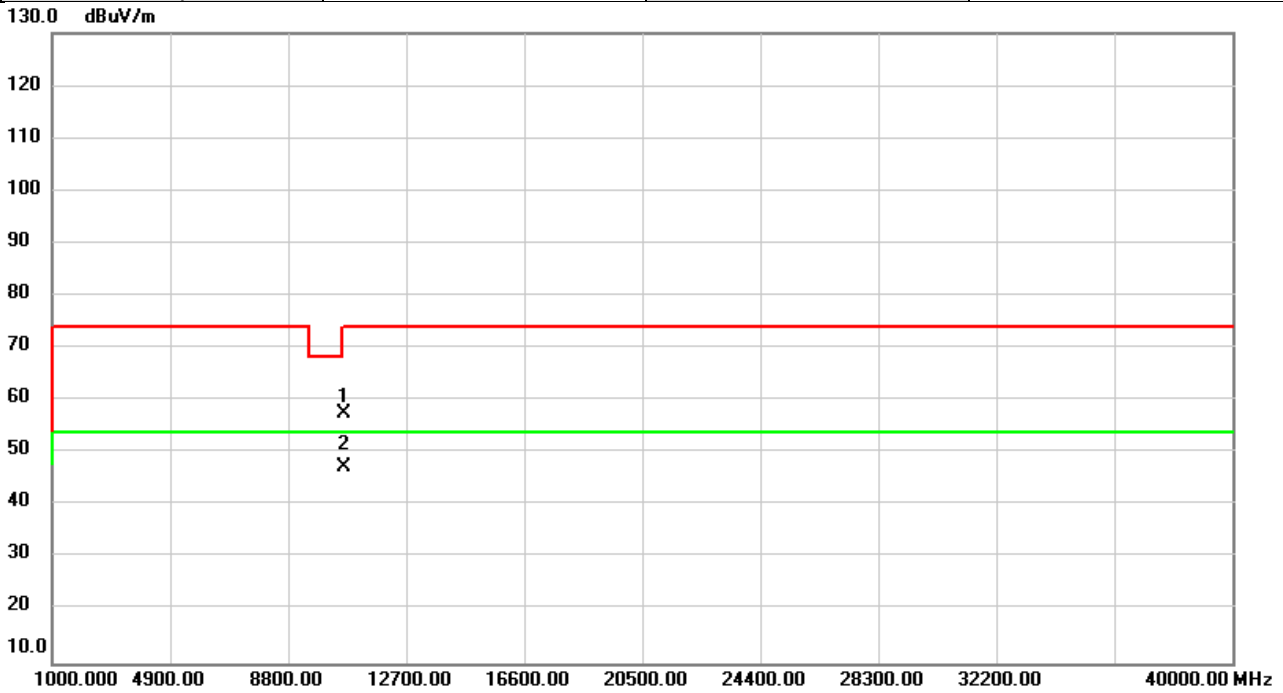


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	52.05	5.43	57.48	74.00	-16.52	peak	
2	*	10640.00	41.87	5.43	47.30	54.00	-6.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5500	Polarization	Vertical
Temp	22°C	Hum.	52%

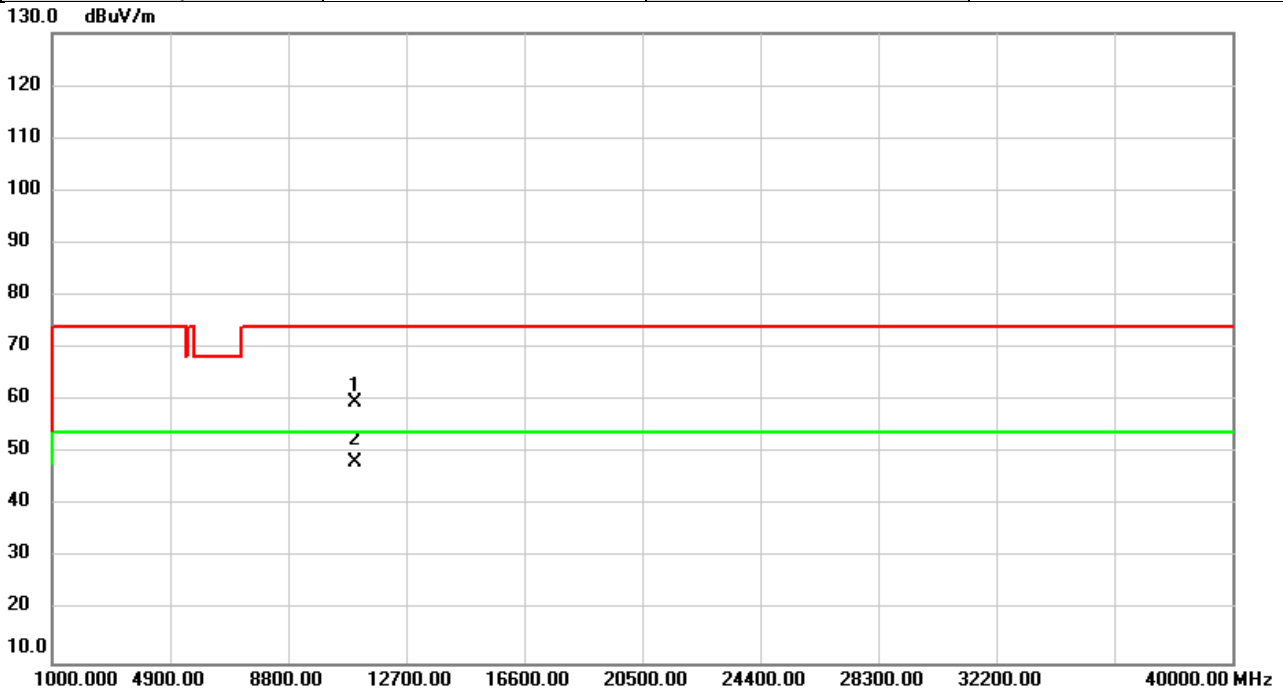


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11000.00	53.01	6.54	59.55	74.00	-14.45	peak	
2	*	11000.00	41.59	6.54	48.13	54.00	-5.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5500	Polarization	Horizontal
Temp	22°C	Hum.	52%

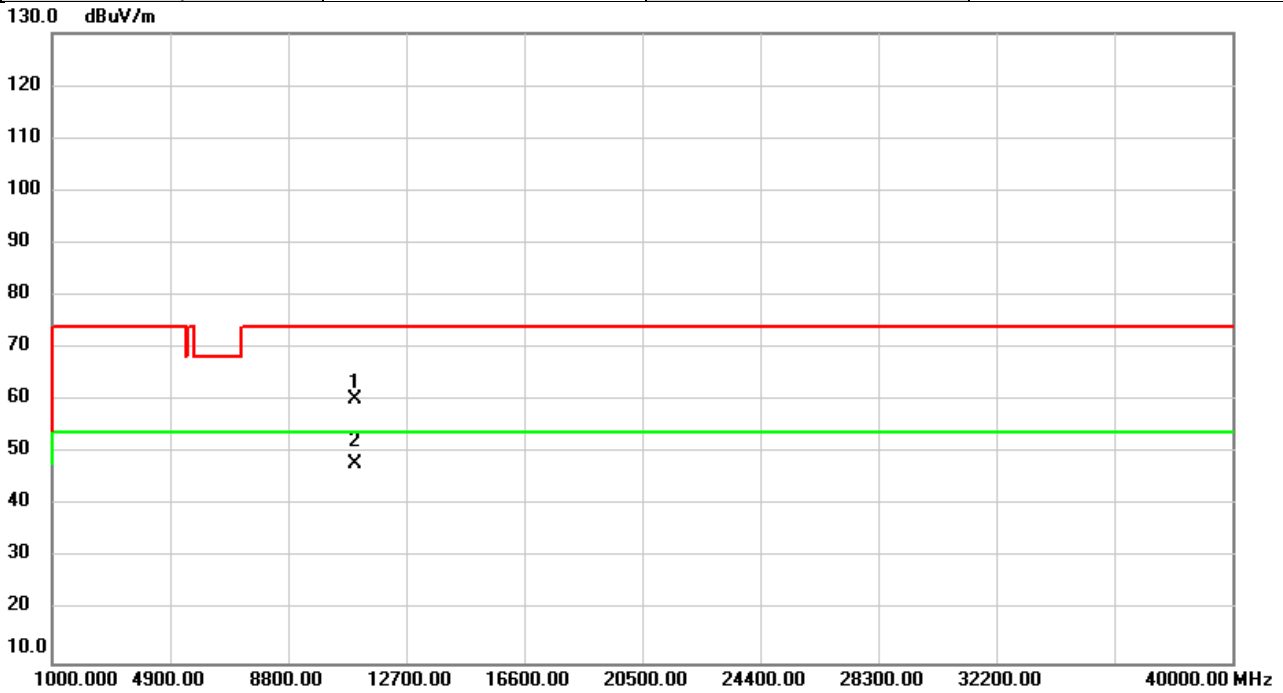


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11000.00	53.70	6.54	60.24	74.00	-13.76	peak	
2	*	11000.00	41.55	6.54	48.09	54.00	-5.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5580	Polarization	Vertical
Temp	22°C	Hum.	52%

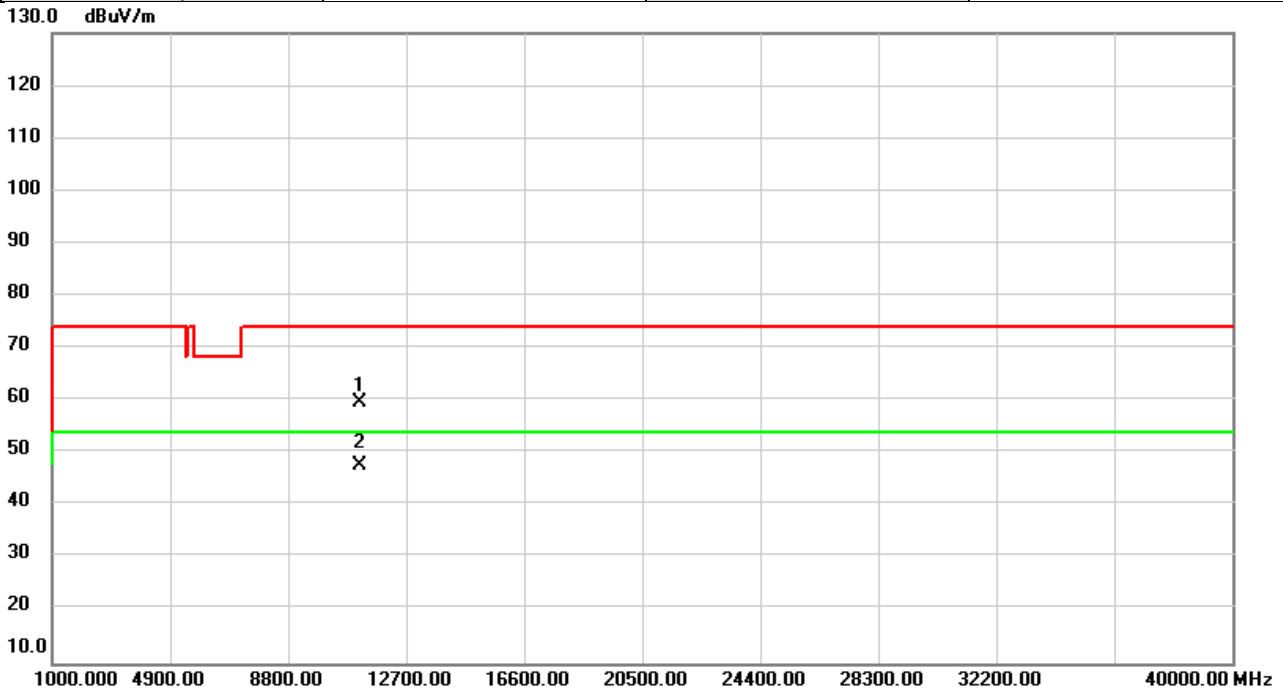


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11160.00	53.65	6.05	59.70	74.00	-14.30	peak	
2	*	11160.00	41.71	6.05	47.76	54.00	-6.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5580	Polarization	Horizontal
Temp	22°C	Hum.	52%

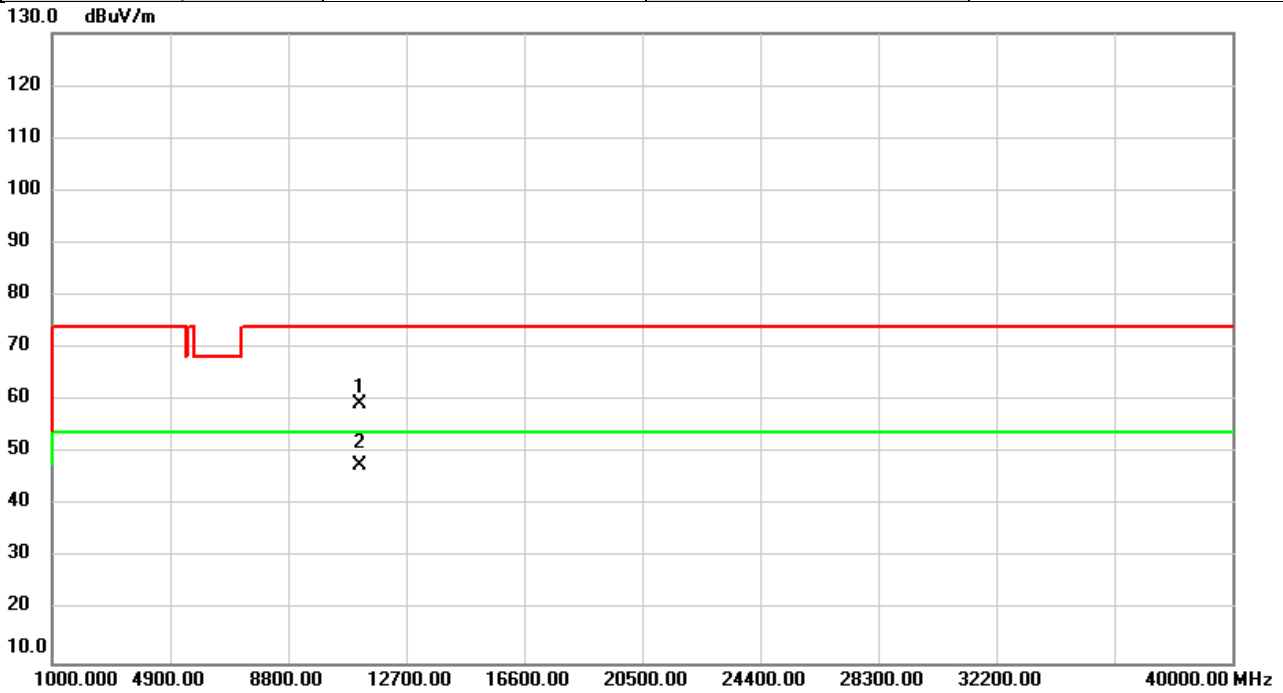


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11160.00	53.41	6.05	59.46	74.00	-14.54	peak	
2	*	11160.00	41.72	6.05	47.77	54.00	-6.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5700	Polarization	Vertical
Temp	22°C	Hum.	52%

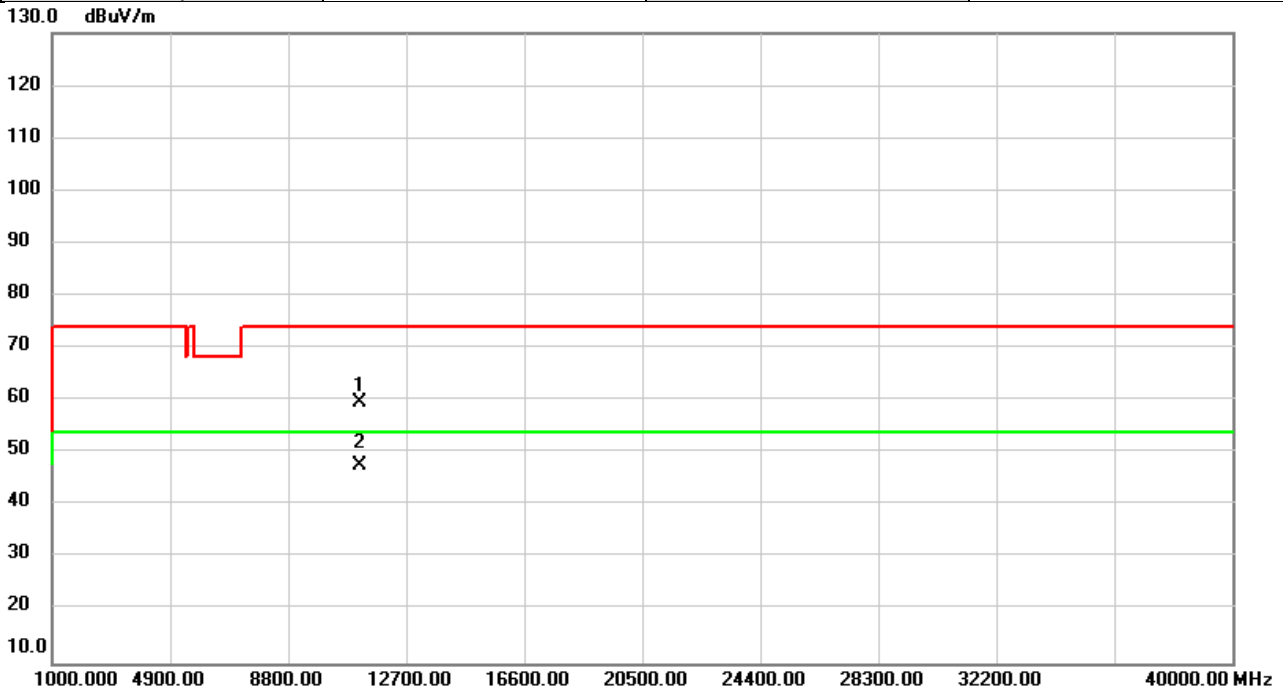


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11160.00	53.63	6.05	59.68	74.00	-14.32	peak	
2	*	11160.00	41.64	6.05	47.69	54.00	-6.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5700	Polarization	Horizontal
Temp	22°C	Hum.	52%

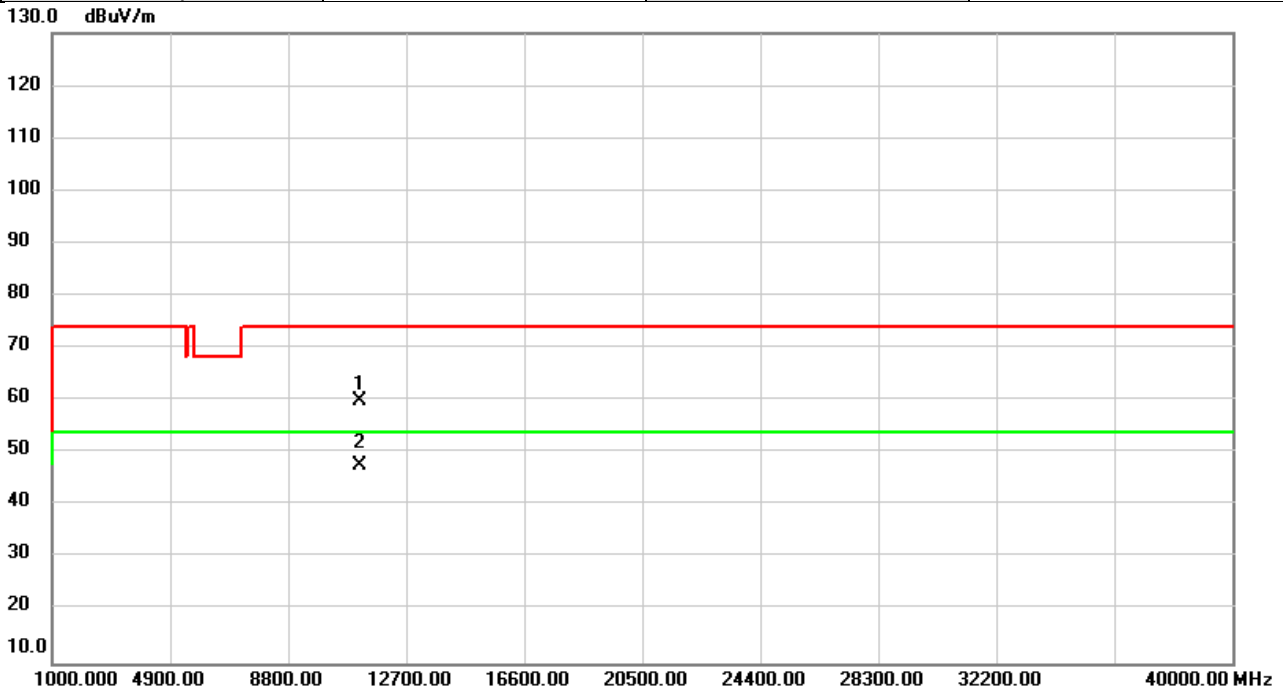


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11160.00	54.05	6.05	60.10	74.00	-13.90	peak	
2	*	11160.00	41.57	6.05	47.62	54.00	-6.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5745	Polarization	Vertical
Temp	22°C	Hum.	52%

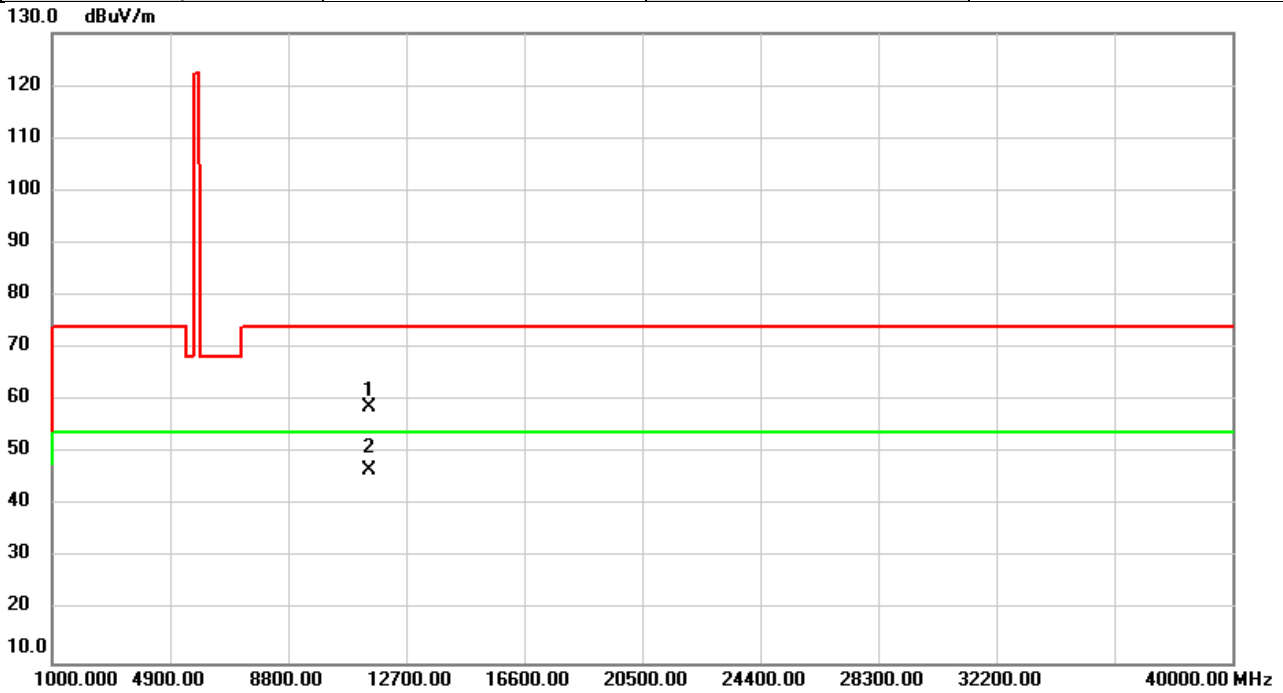


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11490.00	53.67	5.06	58.73	74.00	-15.27	peak	
2	*	11490.00	41.71	5.06	46.77	54.00	-7.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5745	Polarization	Horizontal
Temp	22°C	Hum.	52%

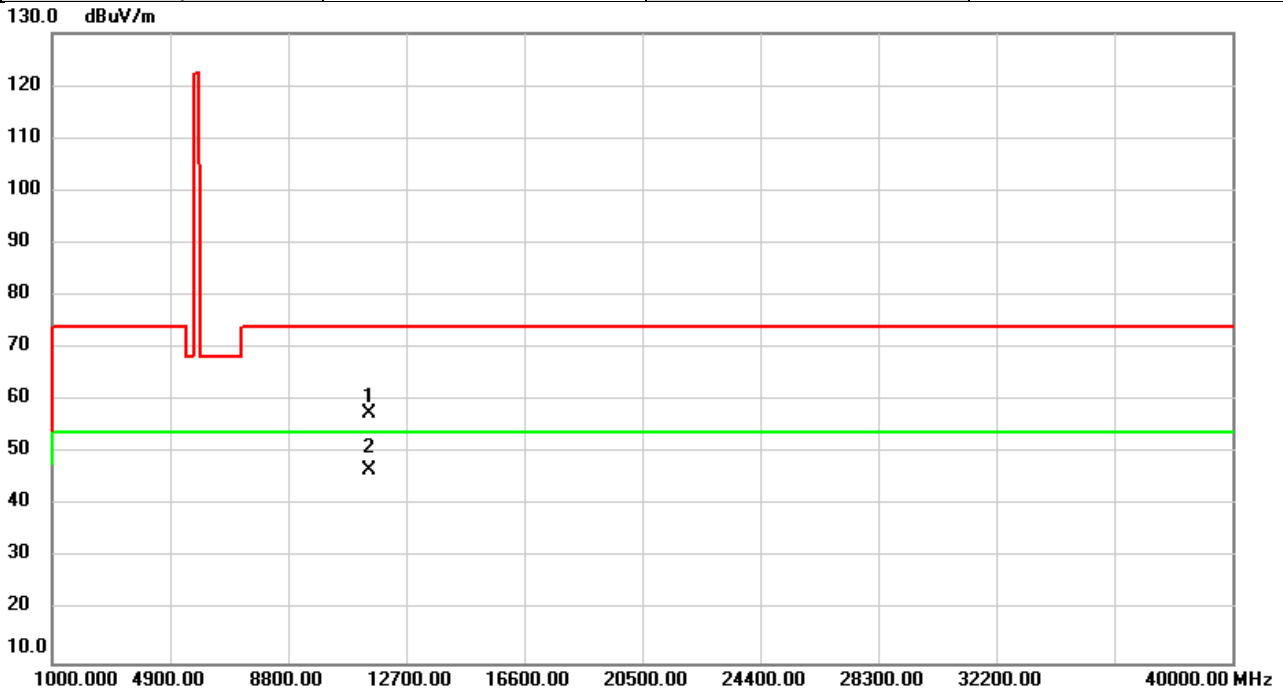


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11490.00	52.37	5.06	57.43	74.00	-16.57	peak	
2	*	11490.00	41.57	5.06	46.63	54.00	-7.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5785	Polarization	Vertical
Temp	22°C	Hum.	52%

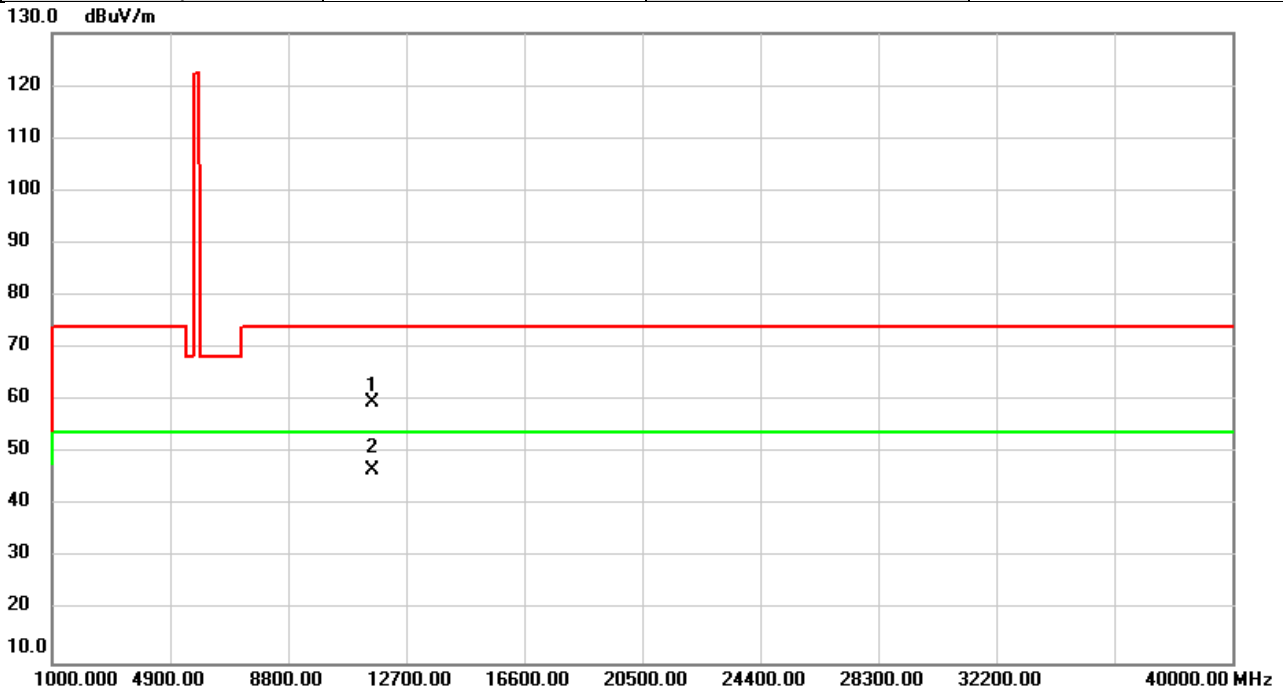


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.00	54.87	4.87	59.74	74.00	-14.26	peak	
2	*	11570.00	41.92	4.87	46.79	54.00	-7.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5785	Polarization	Horizontal
Temp	22°C	Hum.	52%

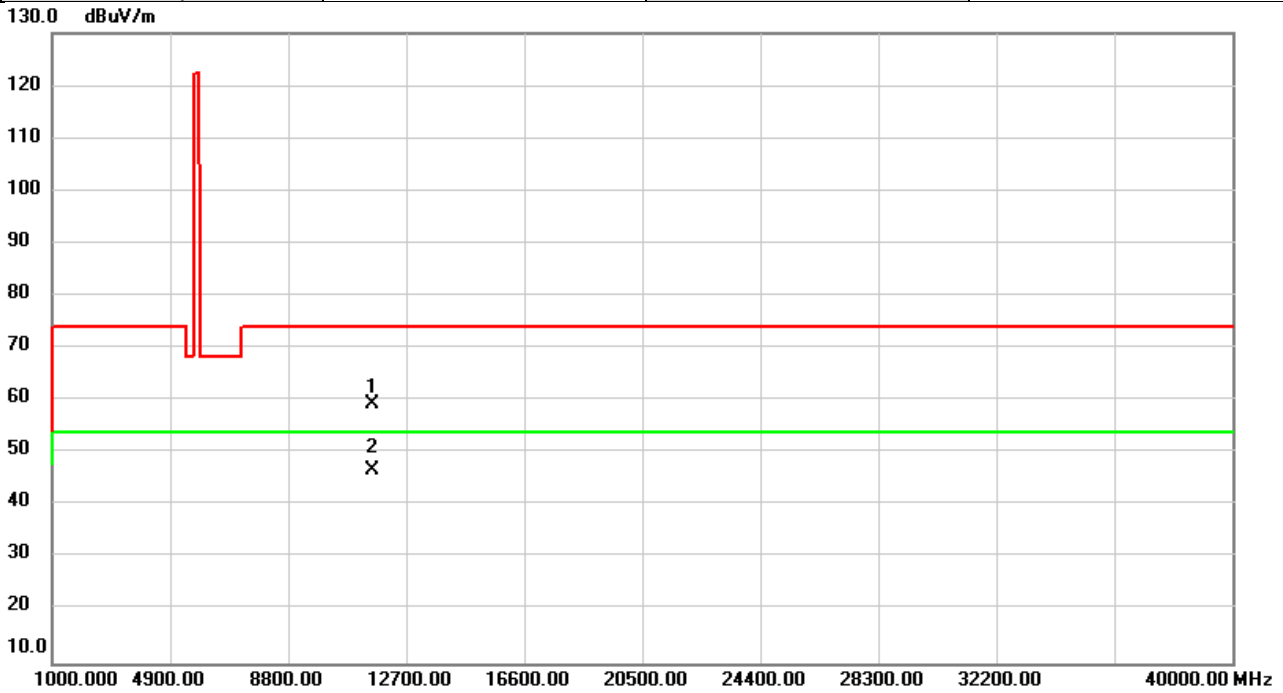


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.00	54.39	4.87	59.26	74.00	-14.74	peak	
2	*	11570.00	41.97	4.87	46.84	54.00	-7.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5825	Polarization	Vertical
Temp	22°C	Hum.	52%

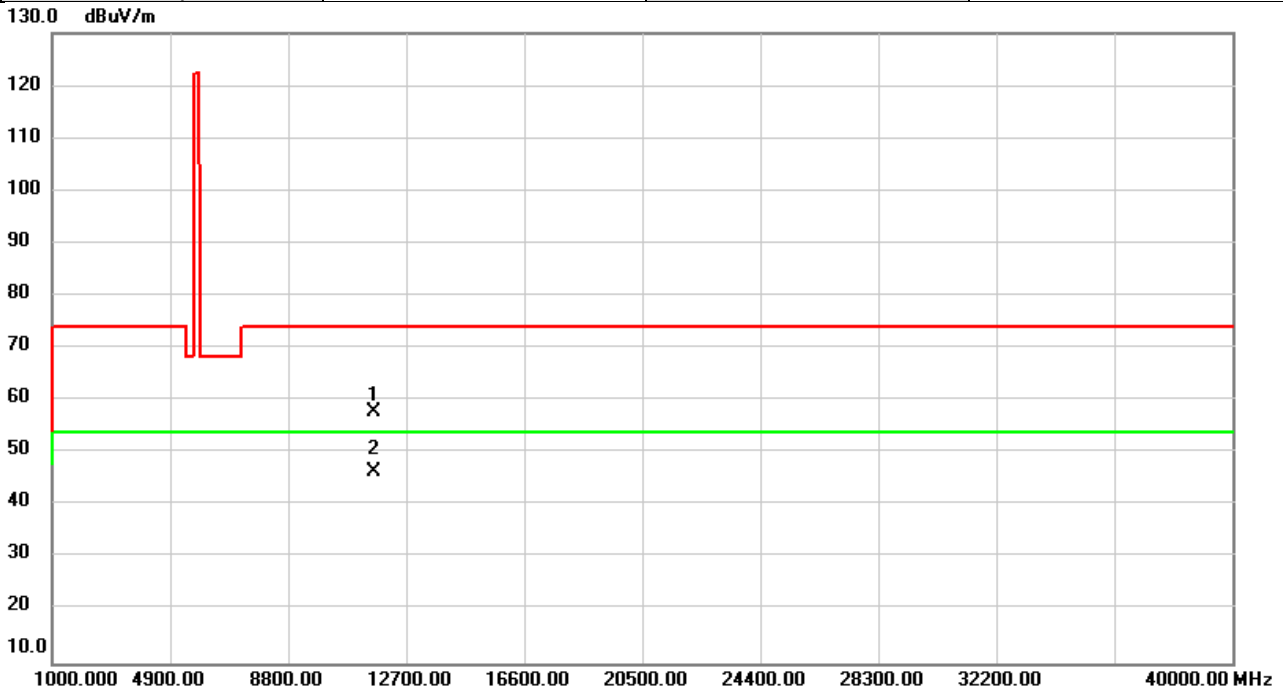


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11650.00	53.15	4.69	57.84	74.00	-16.16	peak	
2	*	11650.00	41.68	4.69	46.37	54.00	-7.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2020/7/6
Test Frequency	5825	Polarization	Horizontal
Temp	22°C	Hum.	52%

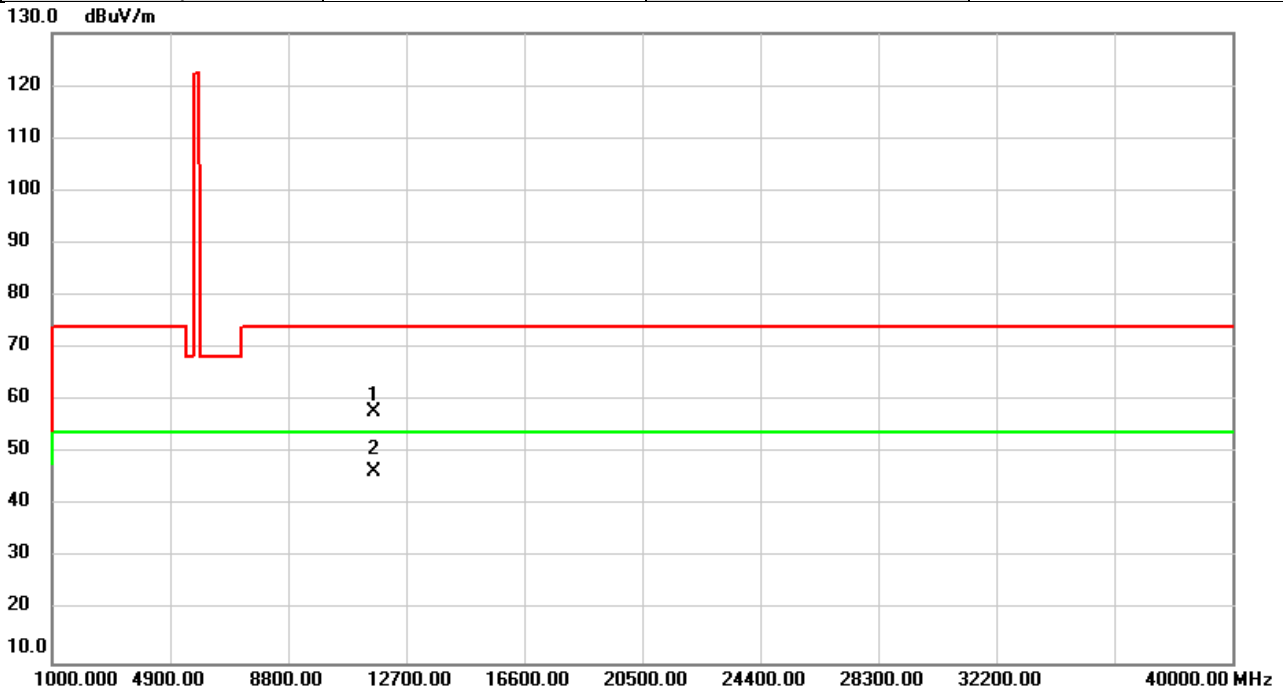


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11650.00	53.26	4.69	57.95	74.00	-16.05	peak	
2	*	11650.00	41.63	4.69	46.32	54.00	-7.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/6
Test Frequency	5190	Polarization	Vertical
Temp	22°C	Hum.	52%

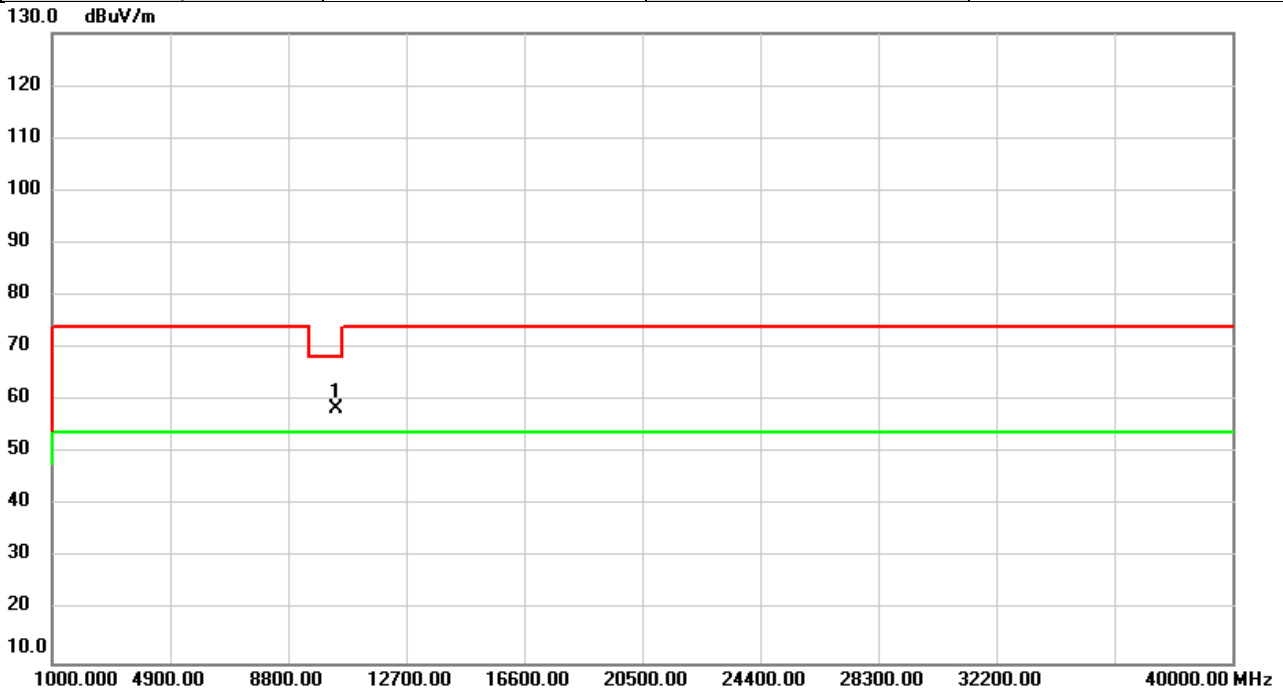


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	53.78	4.76	58.54	68.20	-9.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/6
Test Frequency	5190	Polarization	Horizontal
Temp	22°C	Hum.	52%

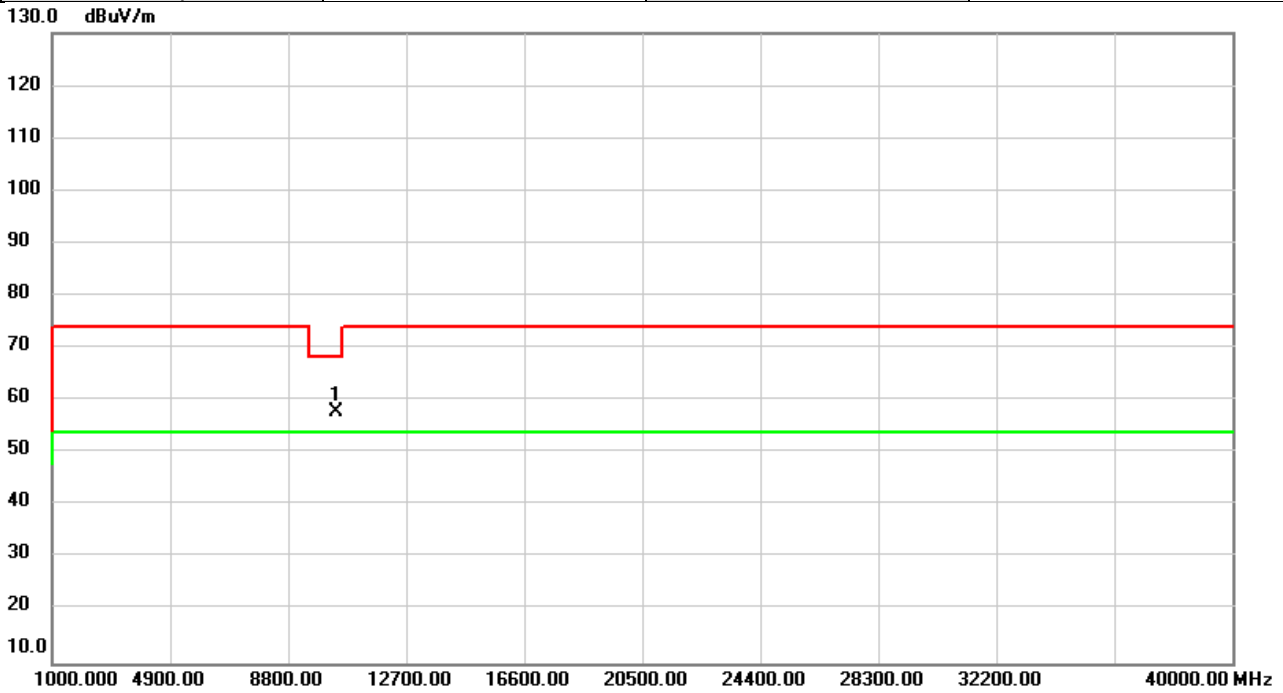


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	53.14	4.76	57.90	68.20	-10.30	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/6
Test Frequency	5230	Polarization	Vertical
Temp	22°C	Hum.	52%

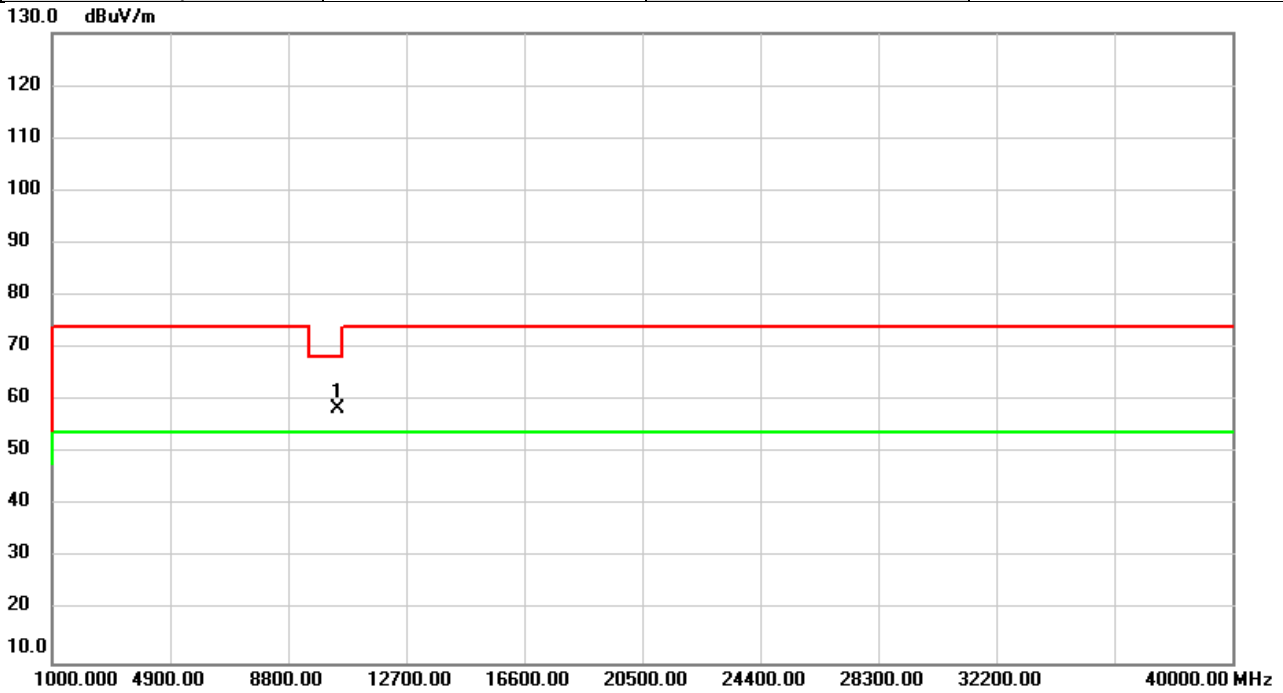


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	53.54	4.92	58.46	68.20	-9.74	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/6
Test Frequency	5230	Polarization	Horizontal
Temp	22°C	Hum.	52%

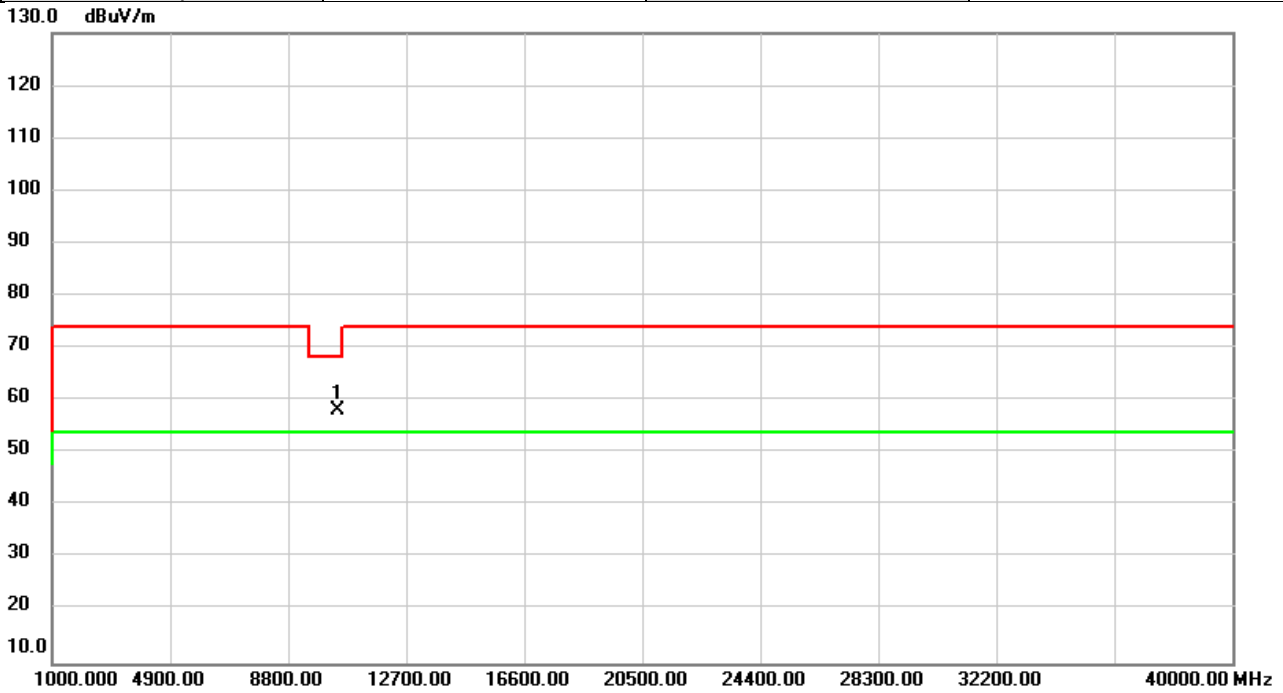


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	53.31	4.92	58.23	68.20	-9.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/6
Test Frequency	5270	Polarization	Vertical
Temp	22°C	Hum.	52%

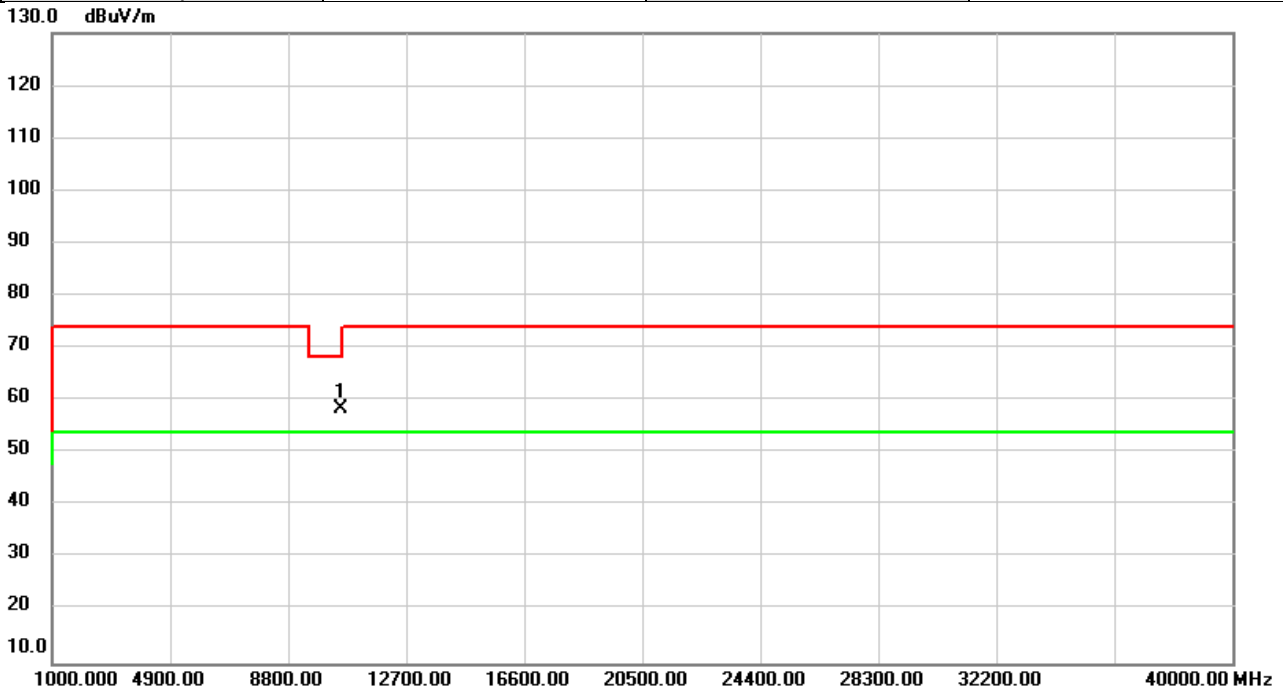


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	53.35	5.12	58.47	68.20	-9.73	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/6
Test Frequency	5270	Polarization	Horizontal
Temp	22°C	Hum.	52%

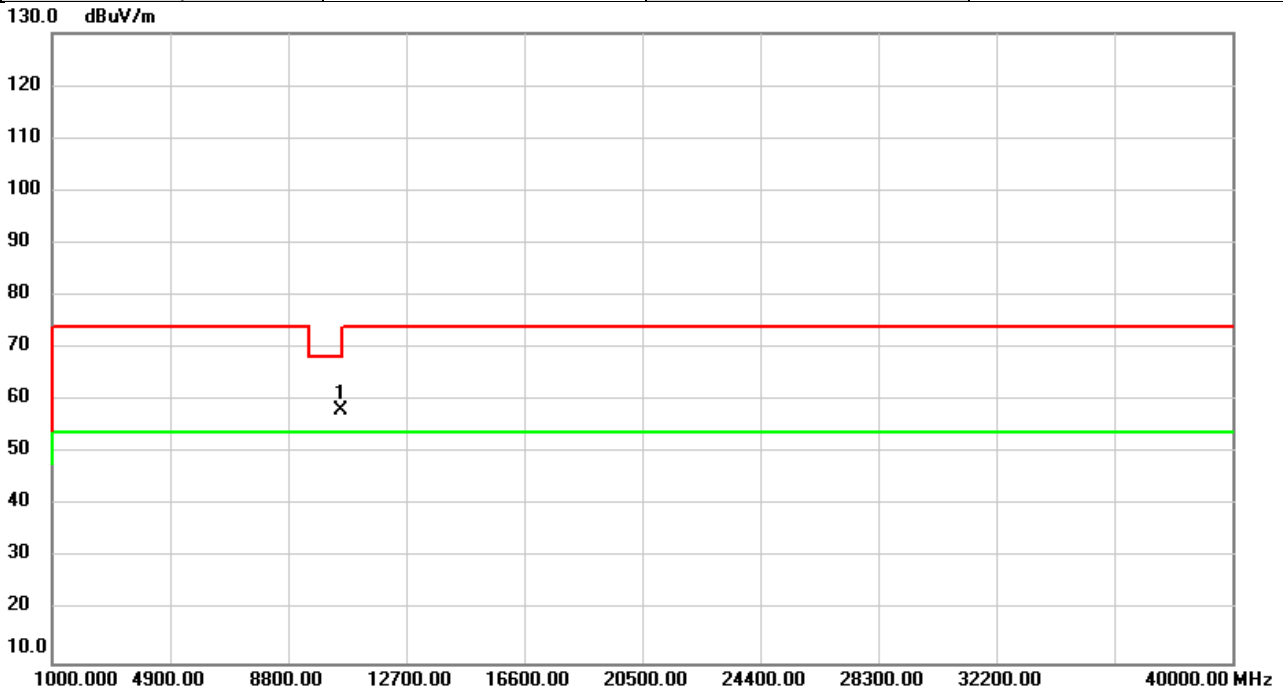


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	52.97	5.12	58.09	68.20	-10.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/6
Test Frequency	5310	Polarization	Vertical
Temp	22°C	Hum.	52%

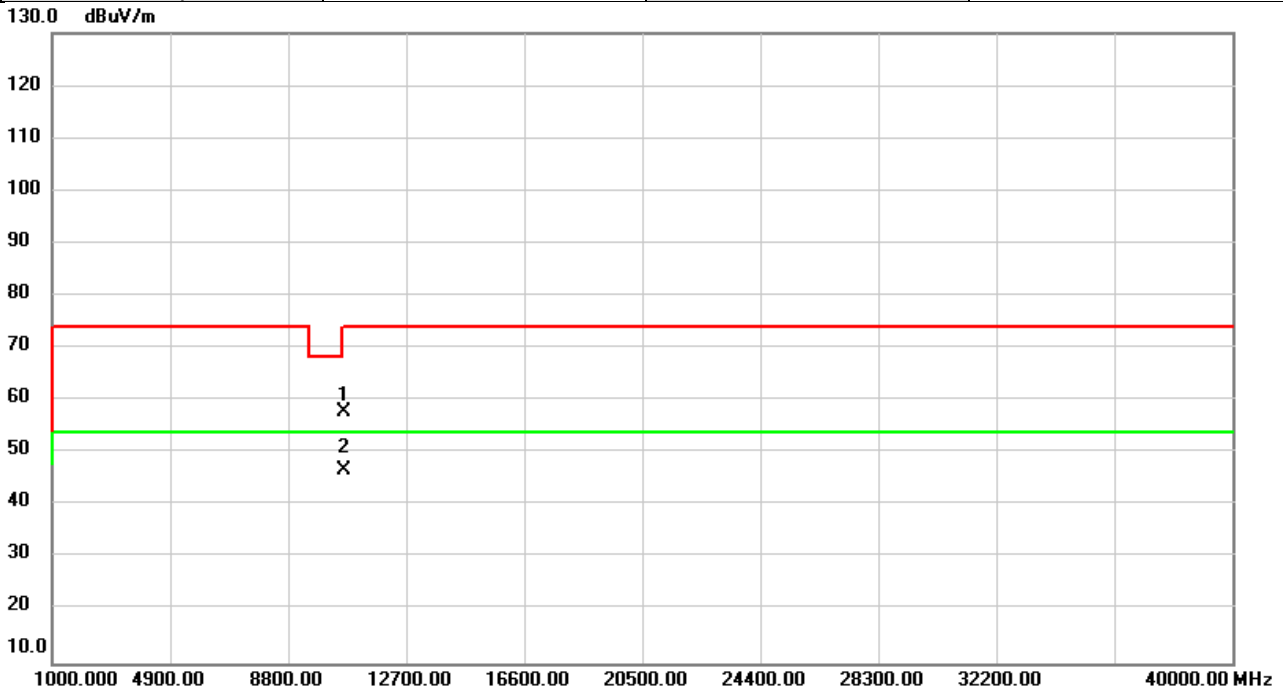


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10620.00	52.44	5.37	57.81	74.00	-16.19	peak	
2	*	10620.00	41.26	5.37	46.63	54.00	-7.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/6
Test Frequency	5310	Polarization	Horizontal
Temp	22°C	Hum.	52%

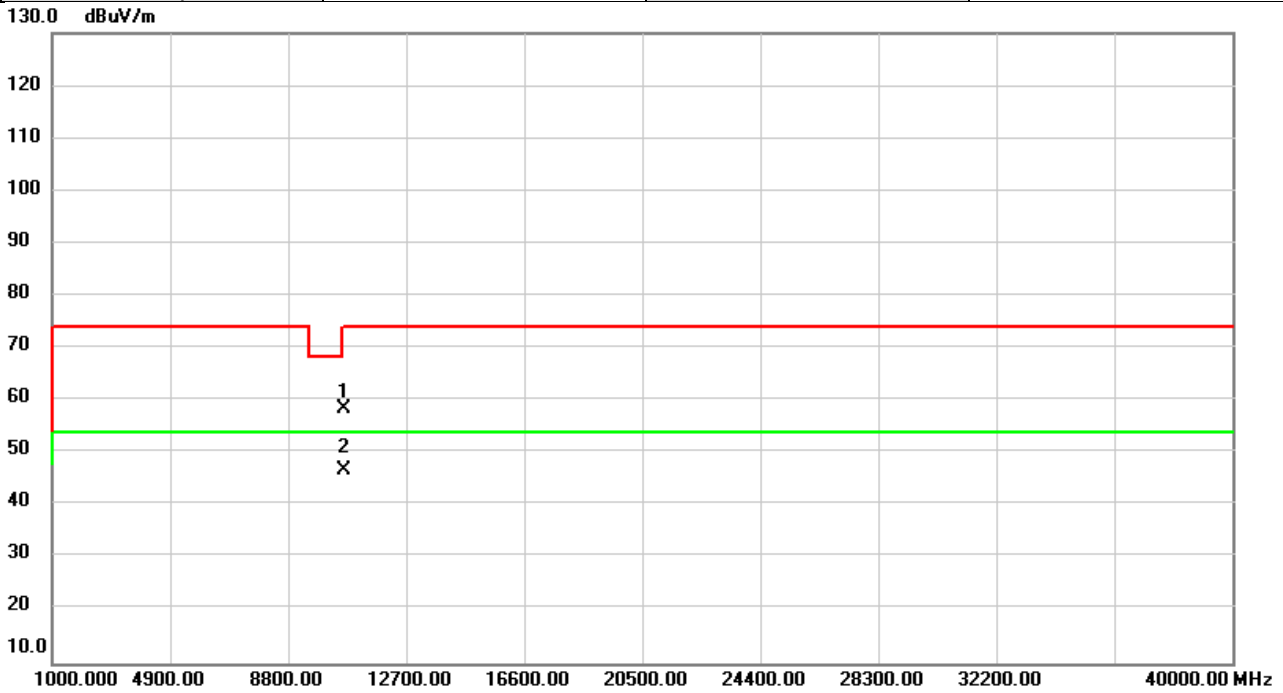


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10620.00	52.94	5.37	58.31	74.00	-15.69	peak	
2	*	10620.00	41.43	5.37	46.80	54.00	-7.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/6
Test Frequency	5510	Polarization	Vertical
Temp	22°C	Hum.	52%

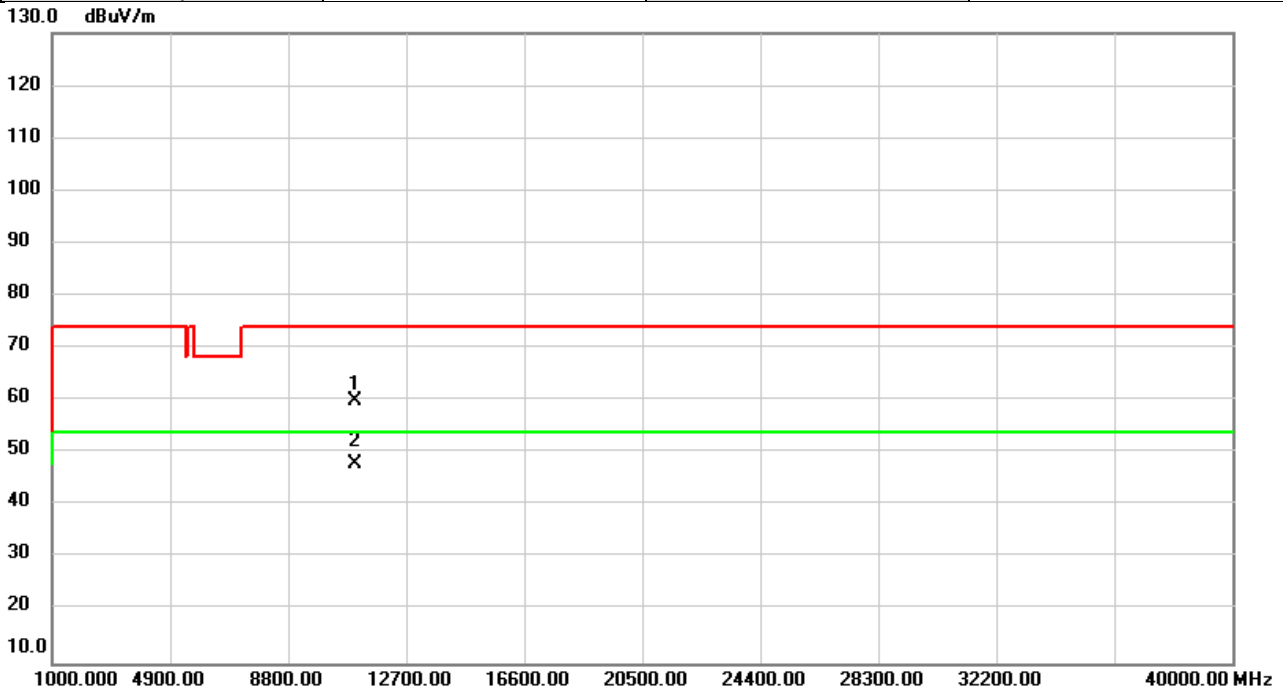


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11020.00	53.43	6.48	59.91	74.00	-14.09	peak	
2	*	11020.00	41.37	6.48	47.85	54.00	-6.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/6
Test Frequency	5510	Polarization	Horizontal
Temp	22°C	Hum.	52%

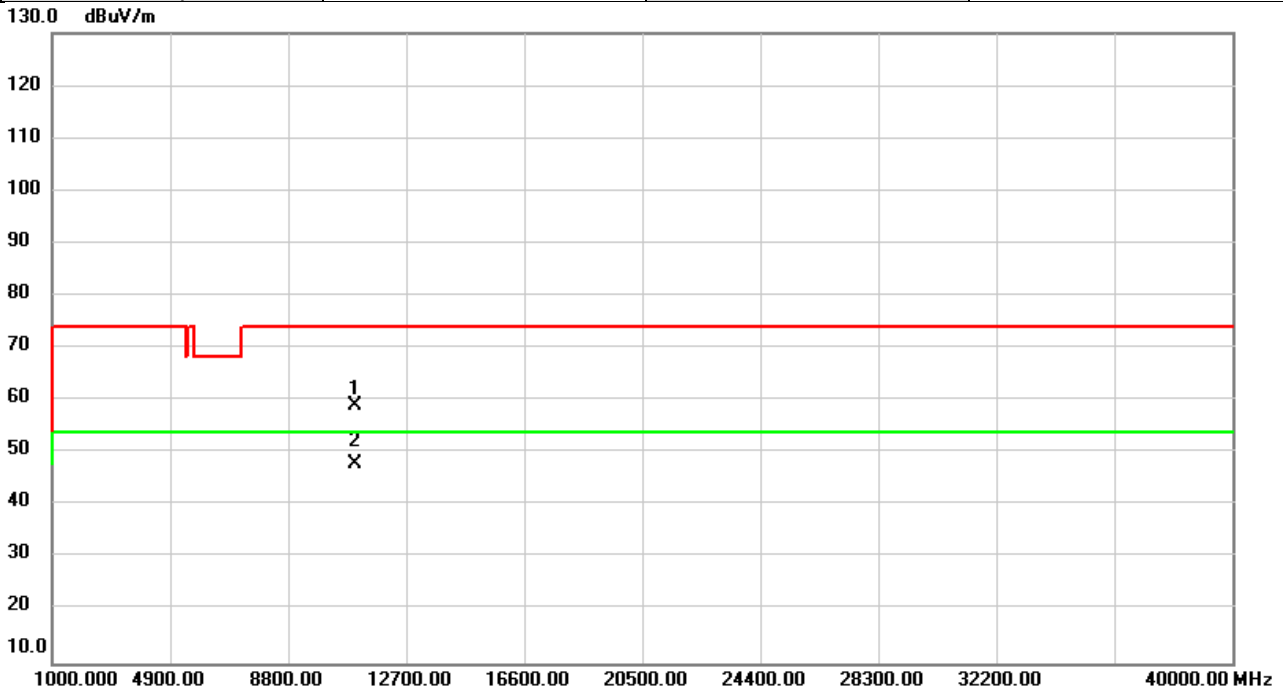


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11020.00	52.47	6.48	58.95	74.00	-15.05	peak	
2	*	11020.00	41.59	6.48	48.07	54.00	-5.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/6
Test Frequency	5550	Polarization	Vertical
Temp	22°C	Hum.	52%

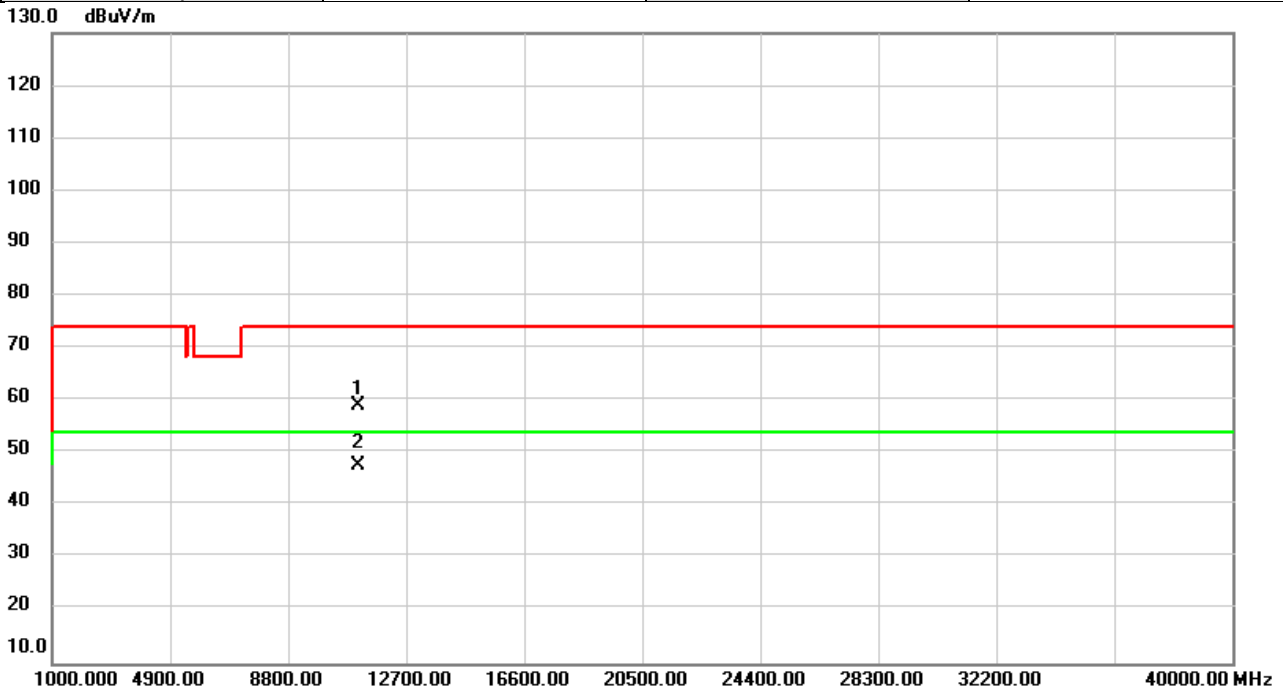


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11100.00	52.86	6.24	59.10	74.00	-14.90	peak	
2	*	11100.00	41.49	6.24	47.73	54.00	-6.27	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/6
Test Frequency	5550	Polarization	Horizontal
Temp	22°C	Hum.	52%

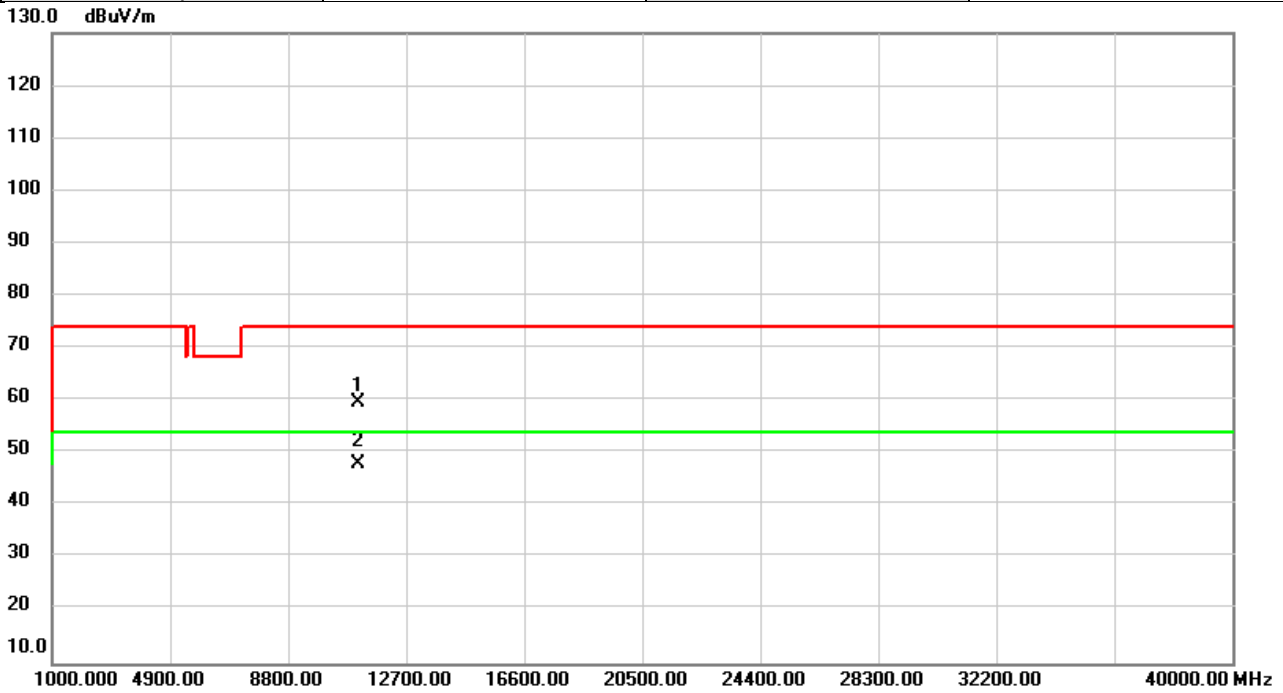


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11100.00	53.30	6.24	59.54	74.00	-14.46	peak	
2	*	11100.00	41.73	6.24	47.97	54.00	-6.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/6
Test Frequency	5670	Polarization	Vertical
Temp	22°C	Hum.	52%

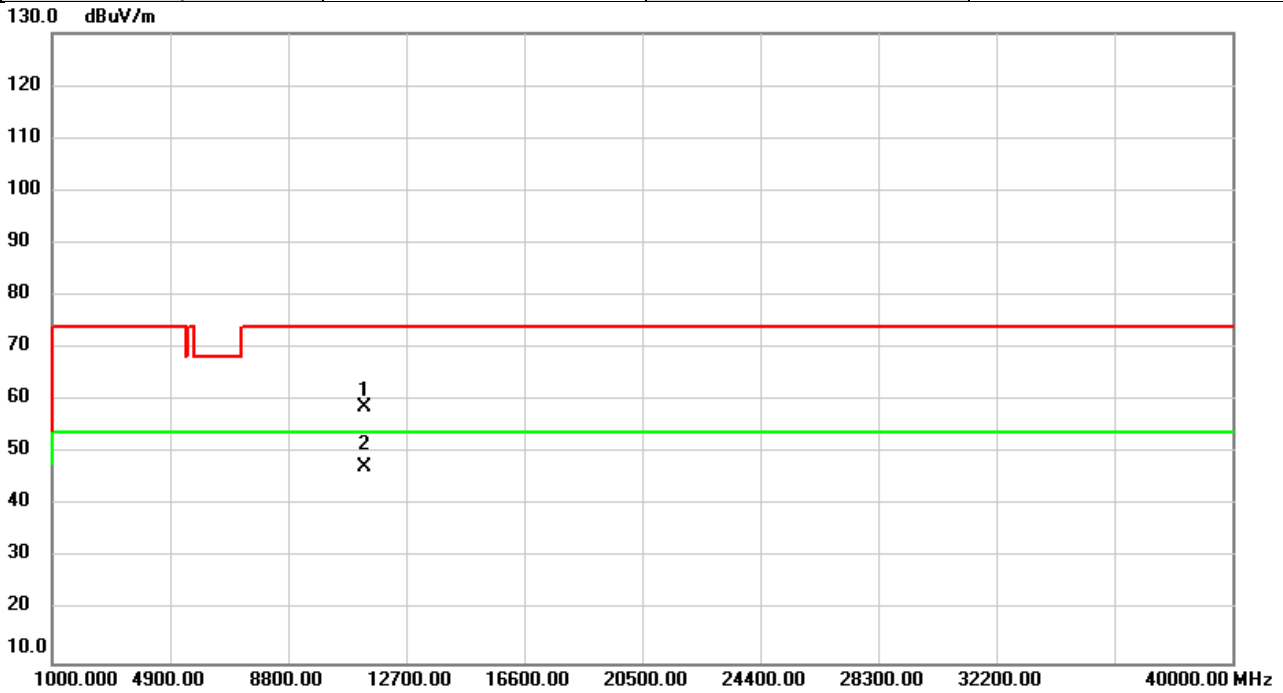


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11340.00	53.09	5.52	58.61	74.00	-15.39	peak	
2	*	11340.00	41.73	5.52	47.25	54.00	-6.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/6
Test Frequency	5670	Polarization	Horizontal
Temp	22°C	Hum.	52%

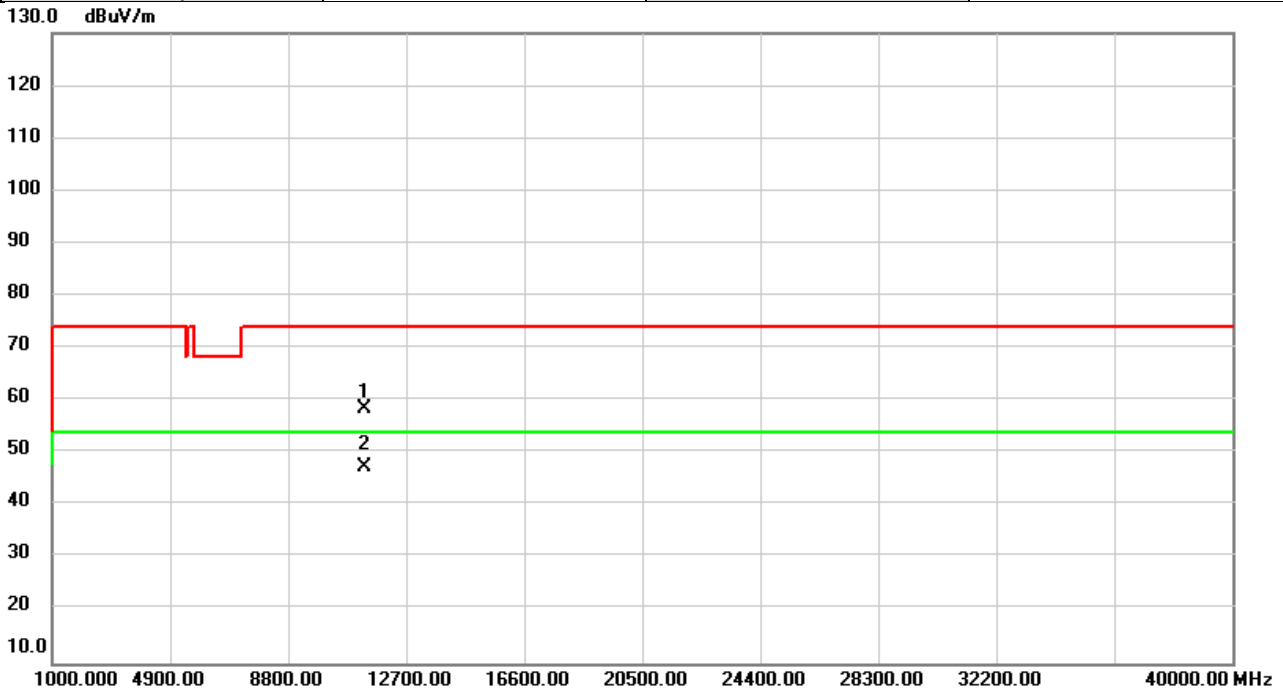


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11340.00	52.83	5.52	58.35	74.00	-15.65	peak	
2	*	11340.00	41.69	5.52	47.21	54.00	-6.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/6
Test Frequency	5755	Polarization	Vertical
Temp	22°C	Hum.	52%

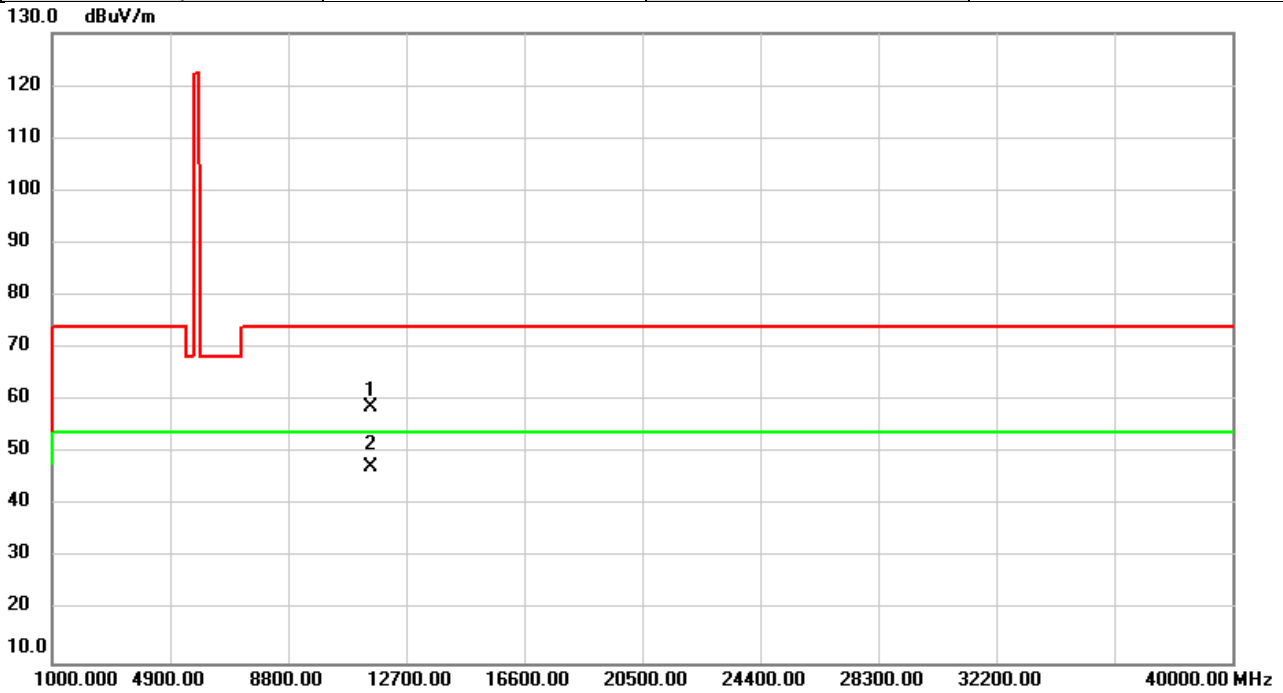


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11510.00	53.73	5.01	58.74	74.00	-15.26	peak	
2	*	11510.00	42.21	5.01	47.22	54.00	-6.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/6
Test Frequency	5755	Polarization	Horizontal
Temp	22°C	Hum.	52%

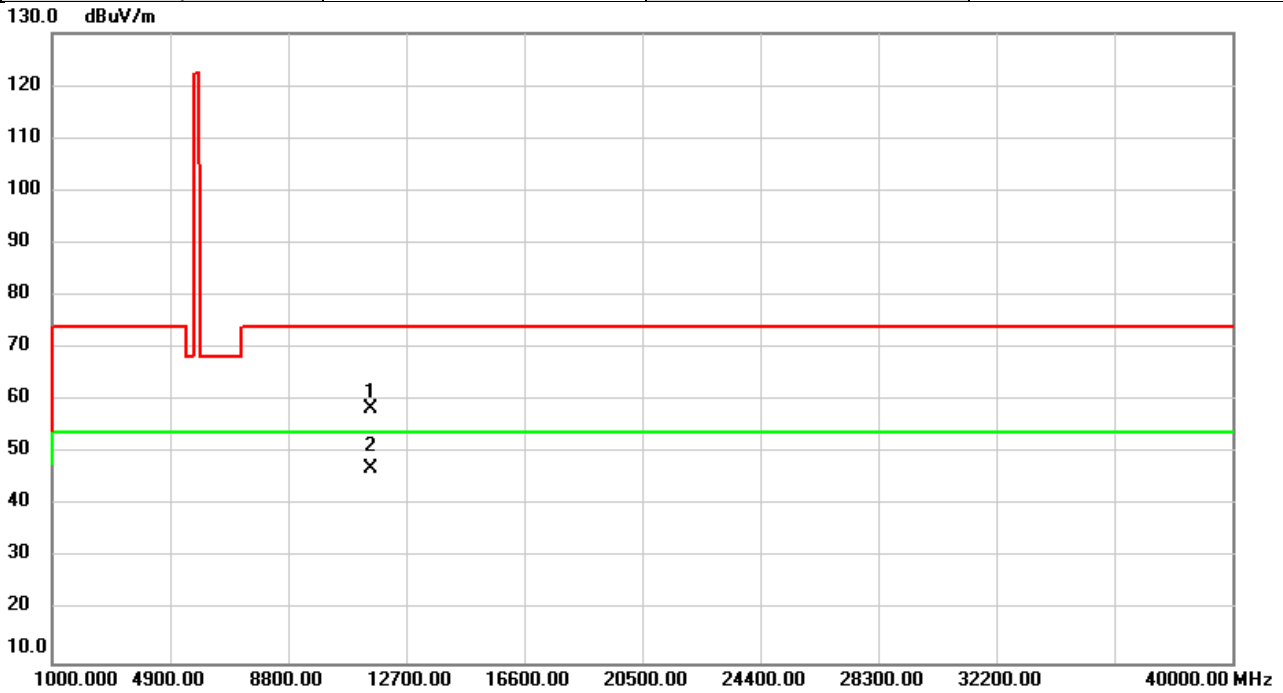


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11510.00	53.58	5.01	58.59	74.00	-15.41	peak	
2	*	11510.00	42.05	5.01	47.06	54.00	-6.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/6
Test Frequency	5795	Polarization	Vertical
Temp	22°C	Hum.	52%

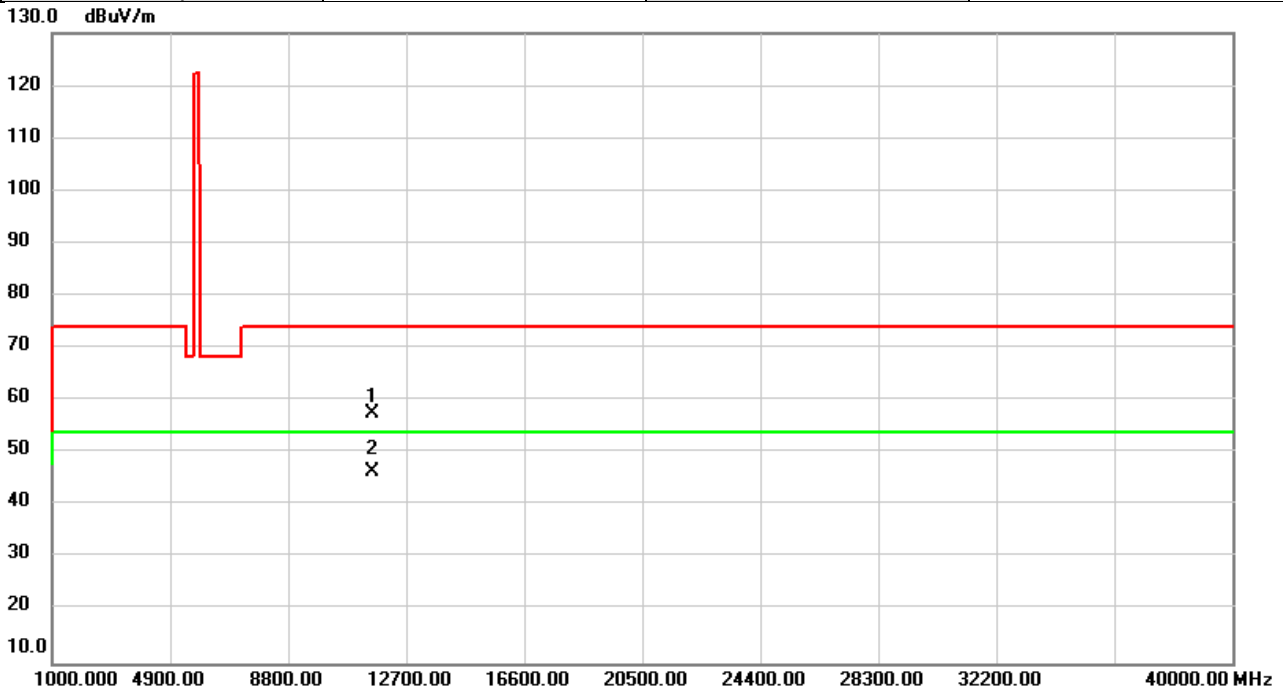


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11590.00	52.73	4.83	57.56	74.00	-16.44	peak	
2	*	11590.00	41.71	4.83	46.54	54.00	-7.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2020/7/6
Test Frequency	5795	Polarization	Horizontal
Temp	22°C	Hum.	52%

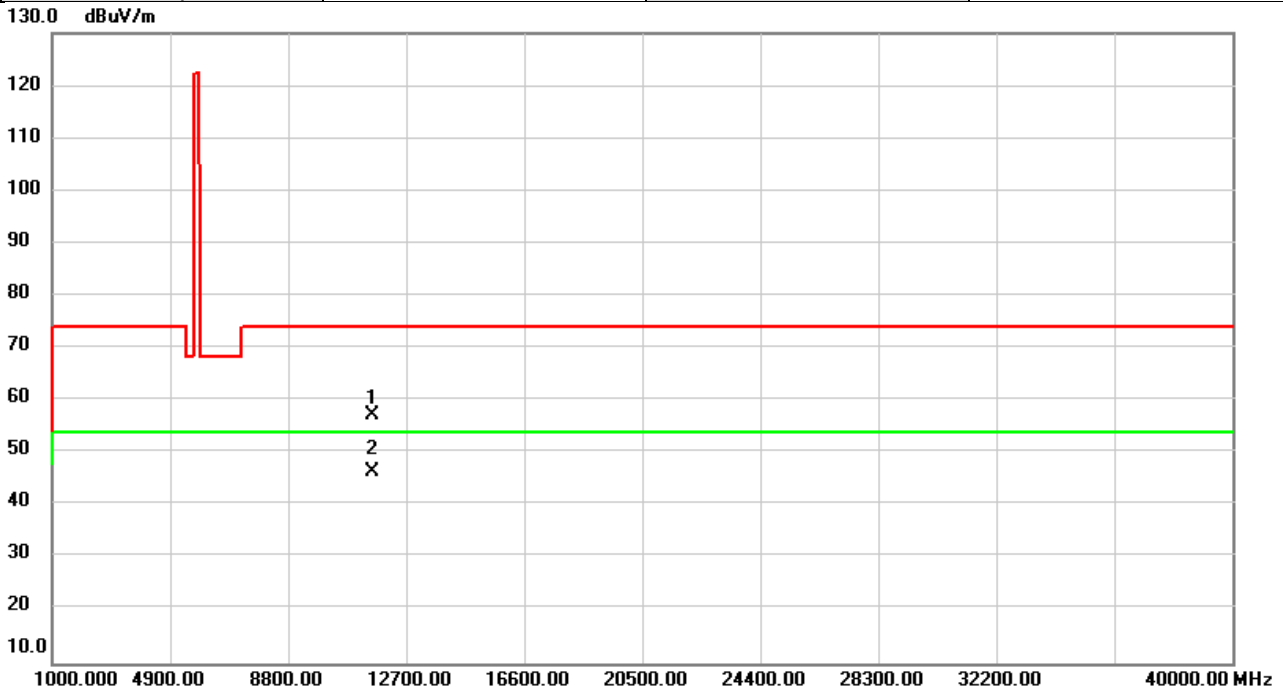


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11590.00	52.57	4.83	57.40	74.00	-16.60	peak	
2	*	11590.00	41.51	4.83	46.34	54.00	-7.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/7/6
Test Frequency	5210	Polarization	Vertical
Temp	22°C	Hum.	52%

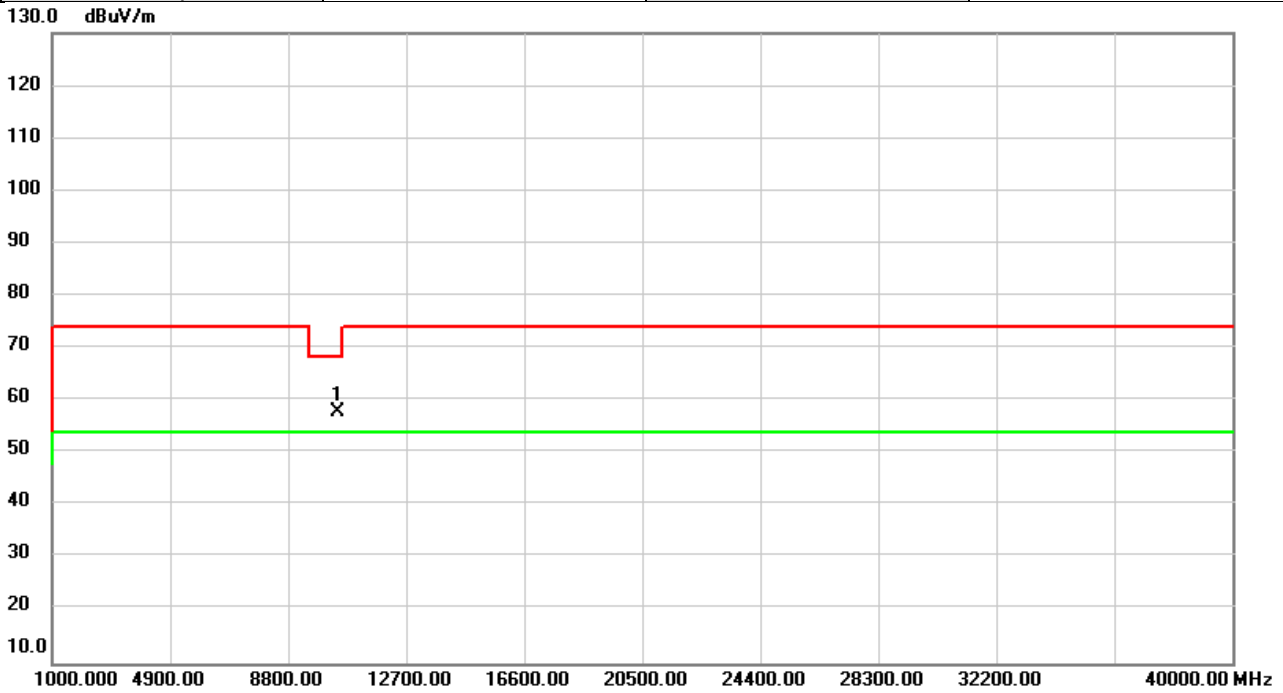


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	53.01	4.84	57.85	68.20	-10.35	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/7/6
Test Frequency	5210	Polarization	Horizontal
Temp	22°C	Hum.	52%

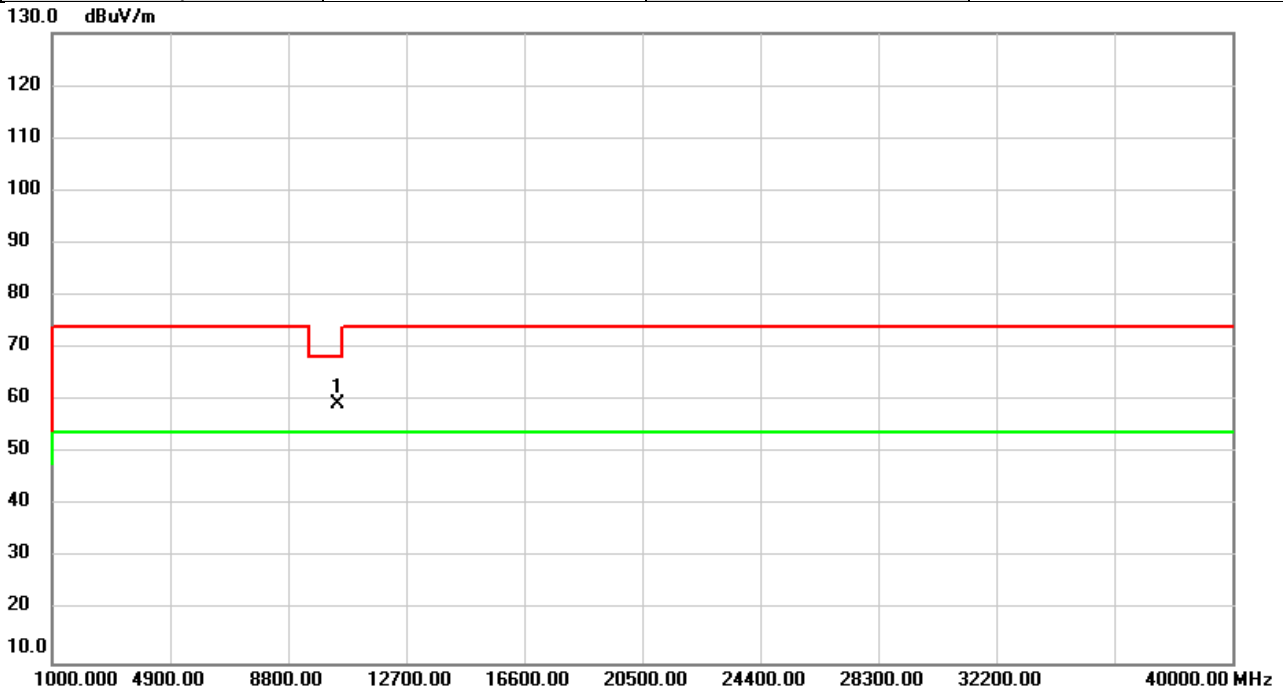


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	54.59	4.84	59.43	68.20	-8.77	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/7/6
Test Frequency	5290	Polarization	Vertical
Temp	22°C	Hum.	52%

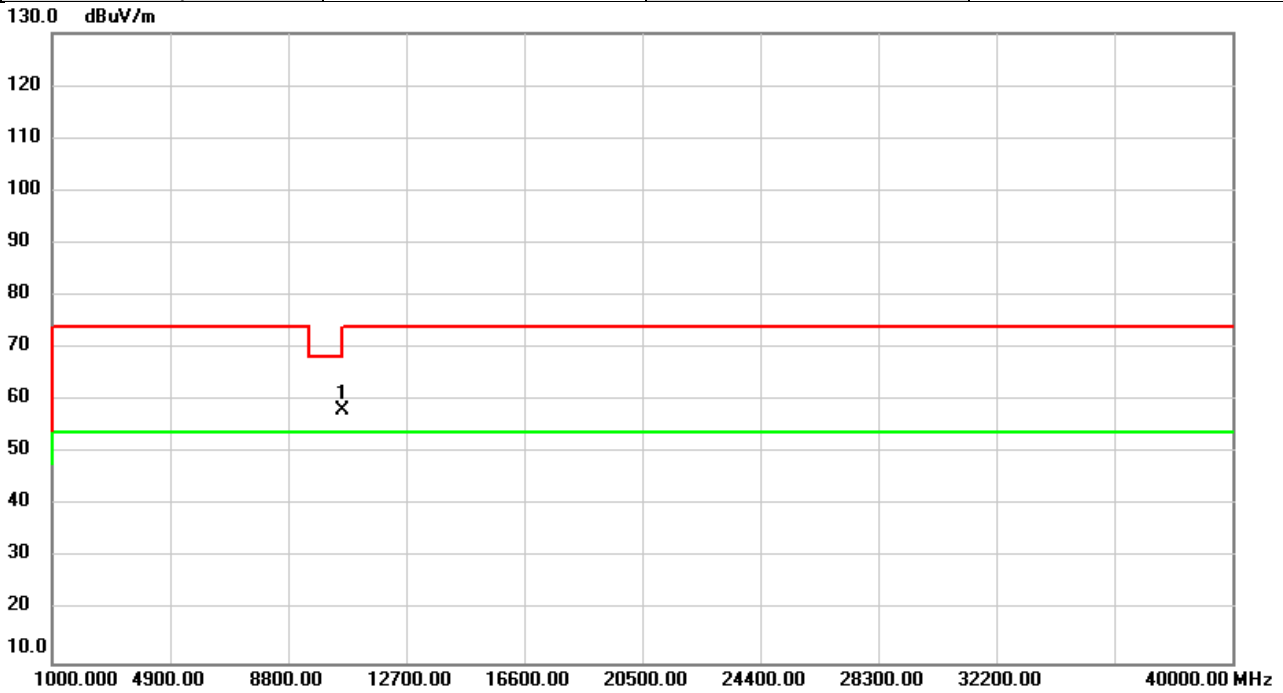


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	52.94	5.25	58.19	68.20	-10.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/7/6
Test Frequency	5290	Polarization	Horizontal
Temp	22°C	Hum.	52%

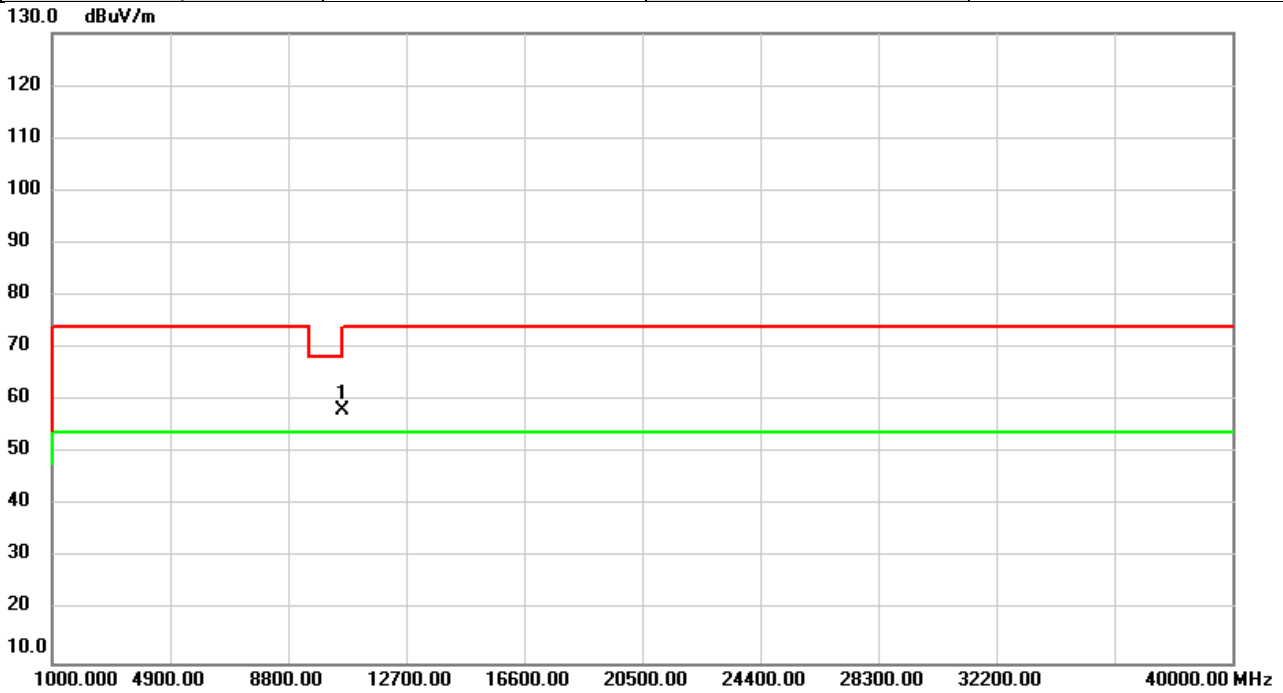


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	52.93	5.25	58.18	68.20	-10.02	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/7/6
Test Frequency	5530	Polarization	Vertical
Temp	22°C	Hum.	52%

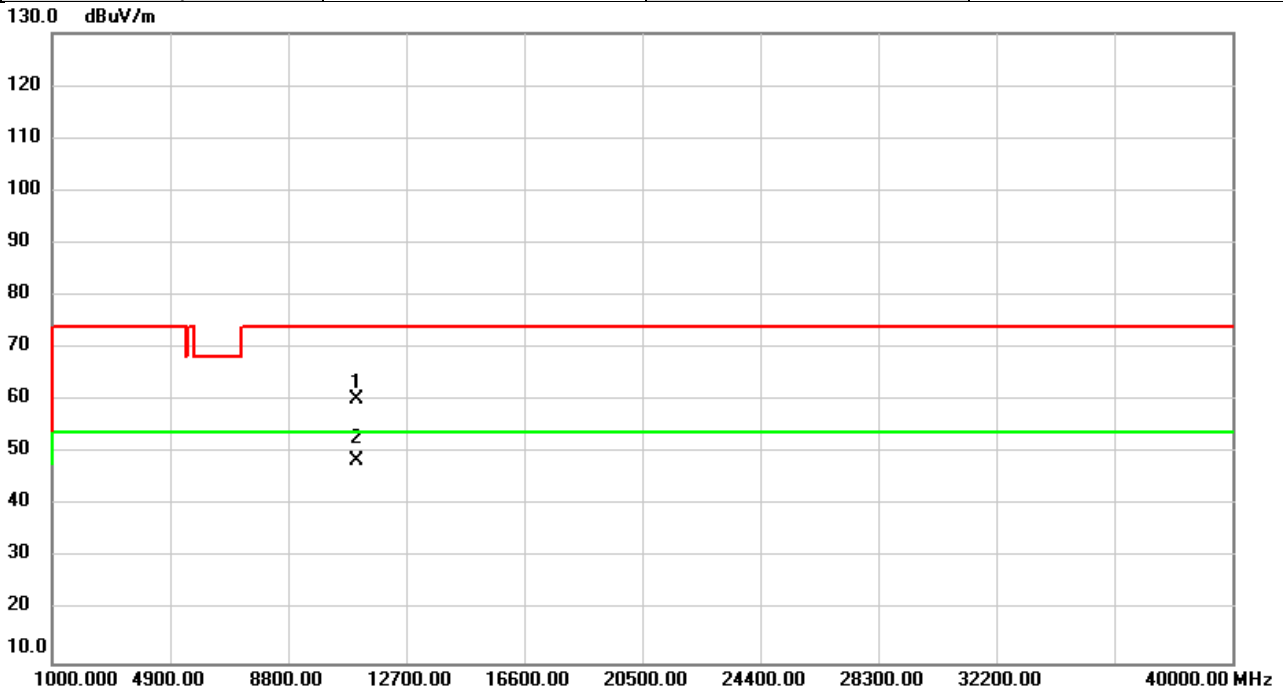


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11060.00	53.99	6.35	60.34	74.00	-13.66	peak	
2	*	11060.00	42.30	6.35	48.65	54.00	-5.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/7/6
Test Frequency	5530	Polarization	Horizontal
Temp	22°C	Hum.	52%

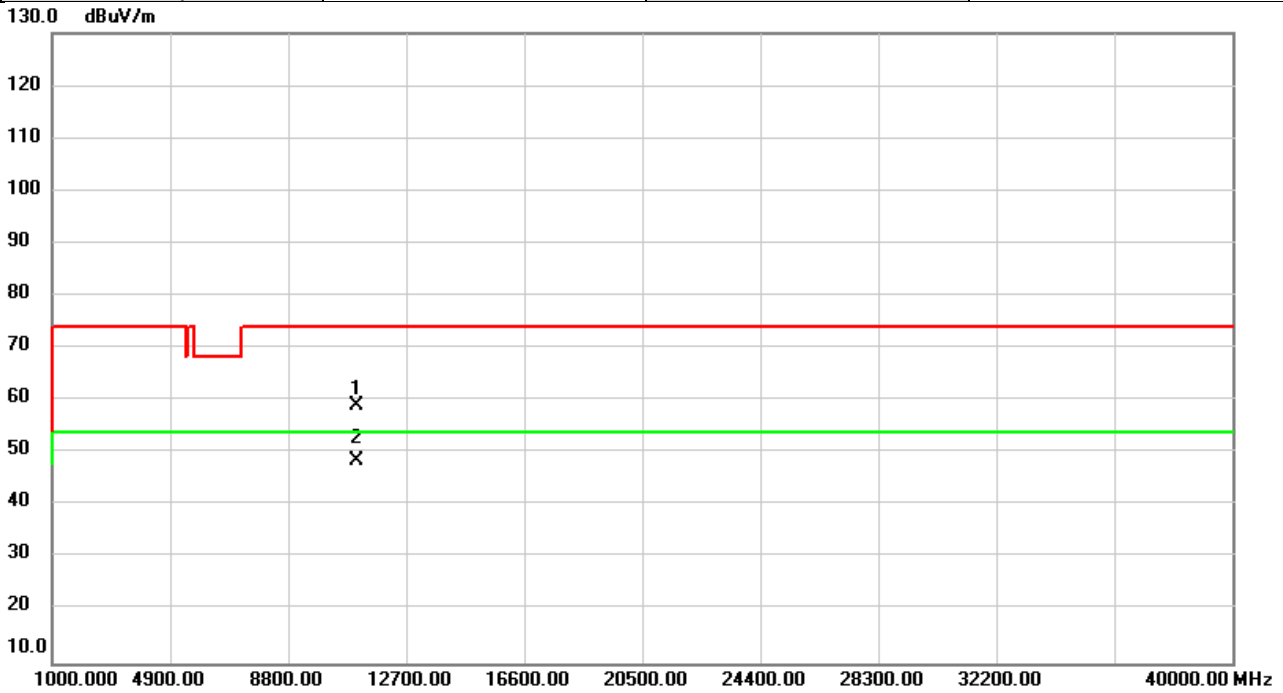


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11060.00	52.80	6.35	59.15	74.00	-14.85	peak	
2	*	11060.00	42.06	6.35	48.41	54.00	-5.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/7/6
Test Frequency	5610	Polarization	Vertical
Temp	22°C	Hum.	52%

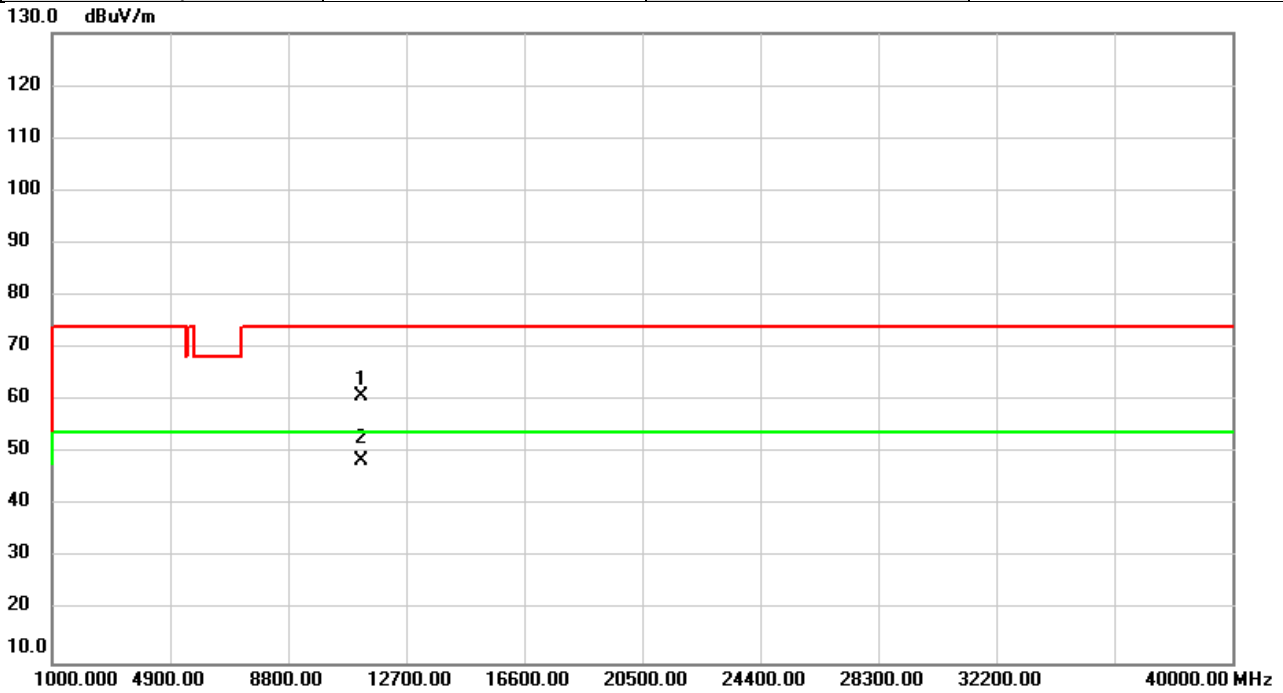


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11220.00	54.89	5.87	60.76	74.00	-13.24	peak	
2	*	11220.00	42.74	5.87	48.61	54.00	-5.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/7/6
Test Frequency	5610	Polarization	Horizontal
Temp	22°C	Hum.	52%

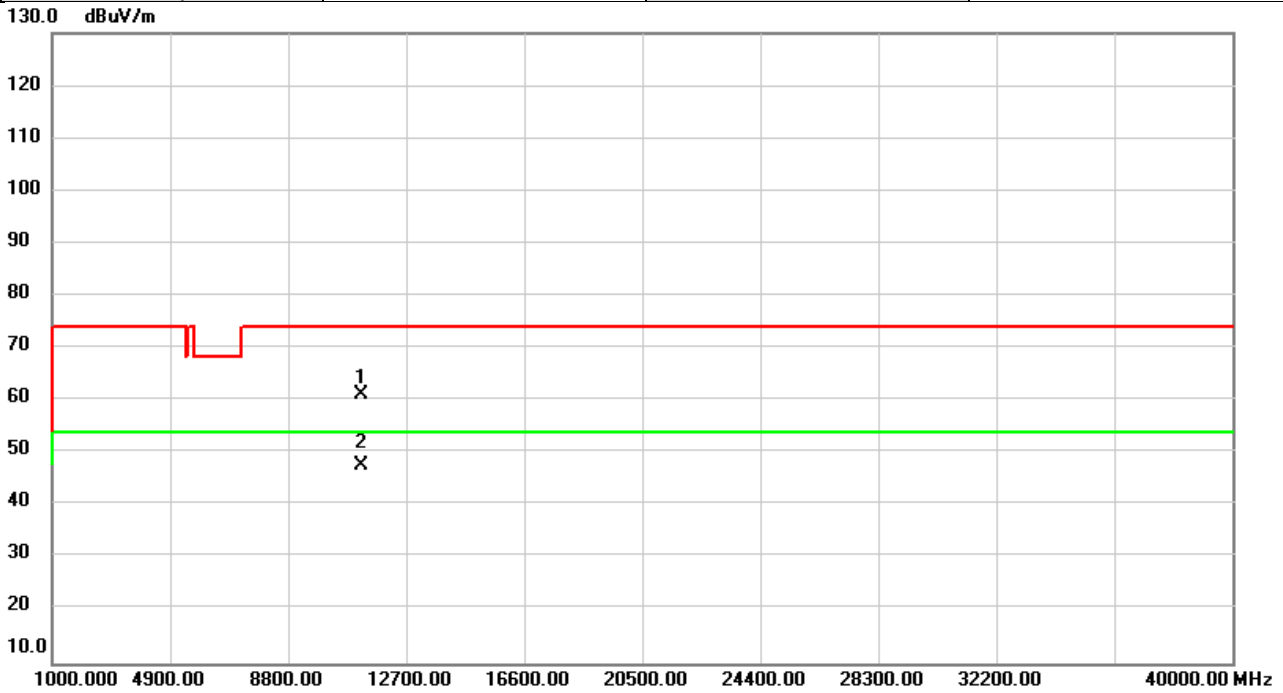


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11220.00	55.16	5.87	61.03	74.00	-12.97	peak	
2	*	11220.00	41.74	5.87	47.61	54.00	-6.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/7/6
Test Frequency	5775	Polarization	Vertical
Temp	22°C	Hum.	52%

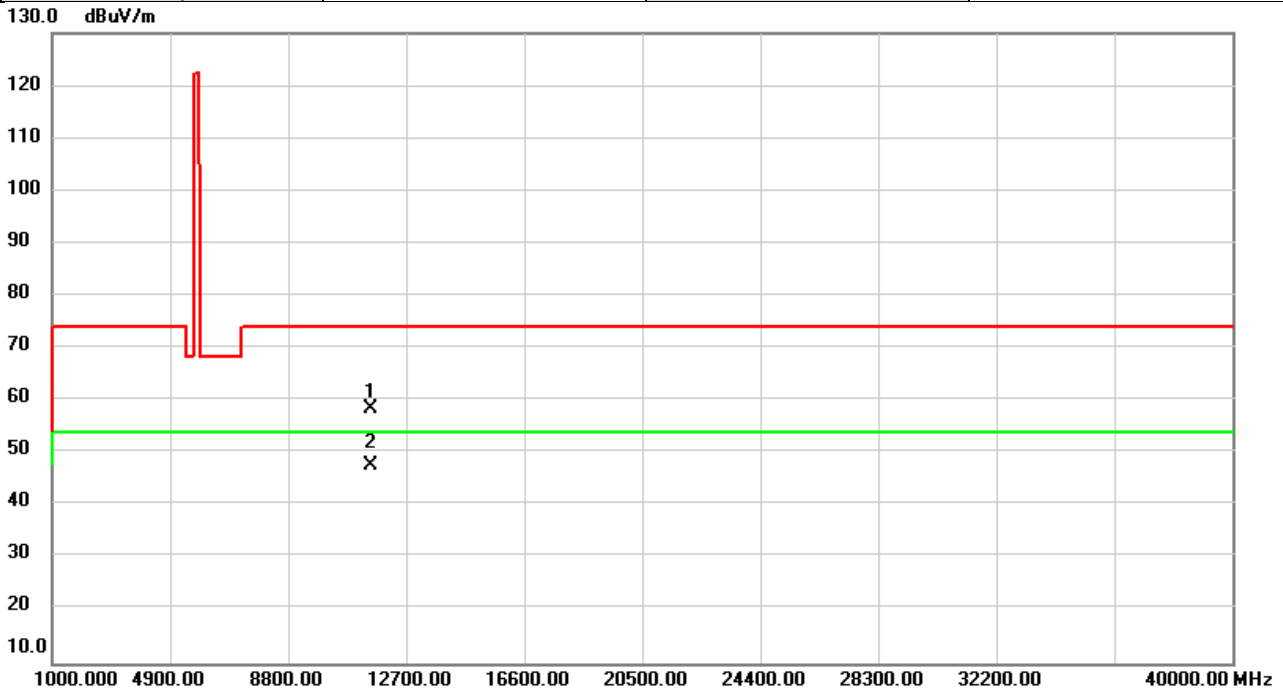


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11550.00	53.57	4.92	58.49	74.00	-15.51	peak	
2	*	11550.00	42.71	4.92	47.63	54.00	-6.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2020/7/6
Test Frequency	5775	Polarization	Horizontal
Temp	22°C	Hum.	52%

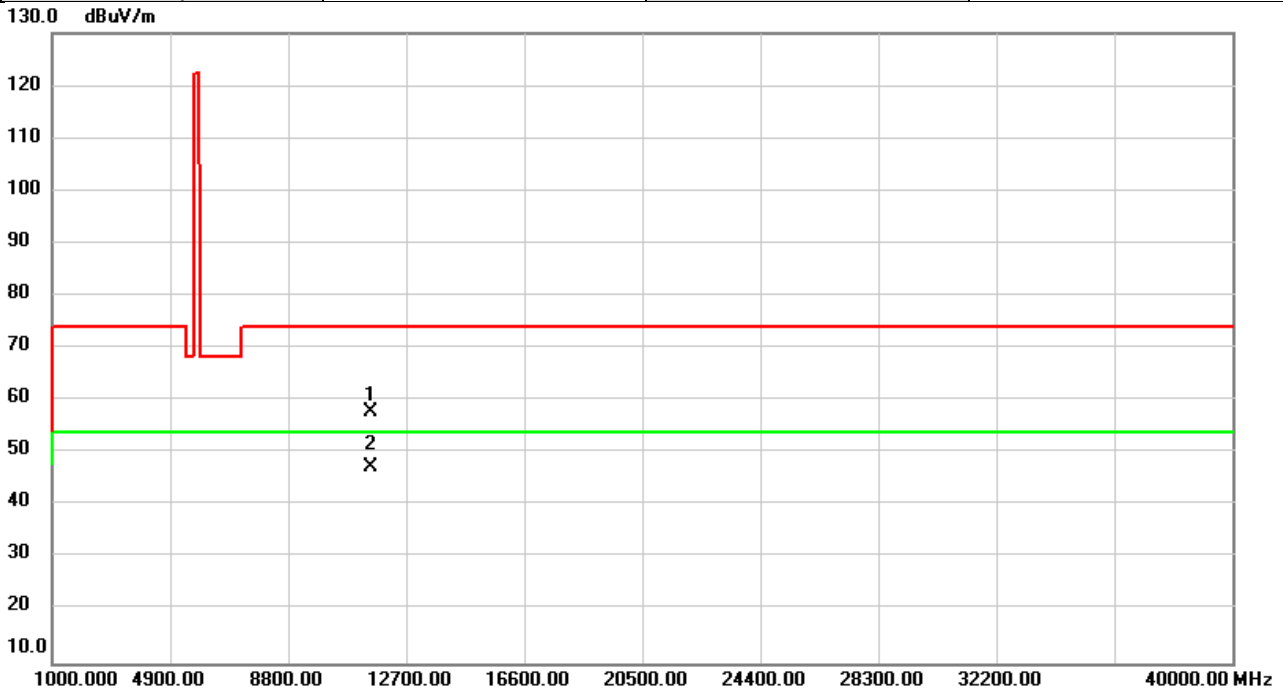


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11550.00	52.92	4.92	57.84	74.00	-16.16	peak	
2	*	11550.00	42.58	4.92	47.50	54.00	-6.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2020/7/6
Test Frequency	5250	Polarization	Vertical
Temp	22°C	Hum.	52%

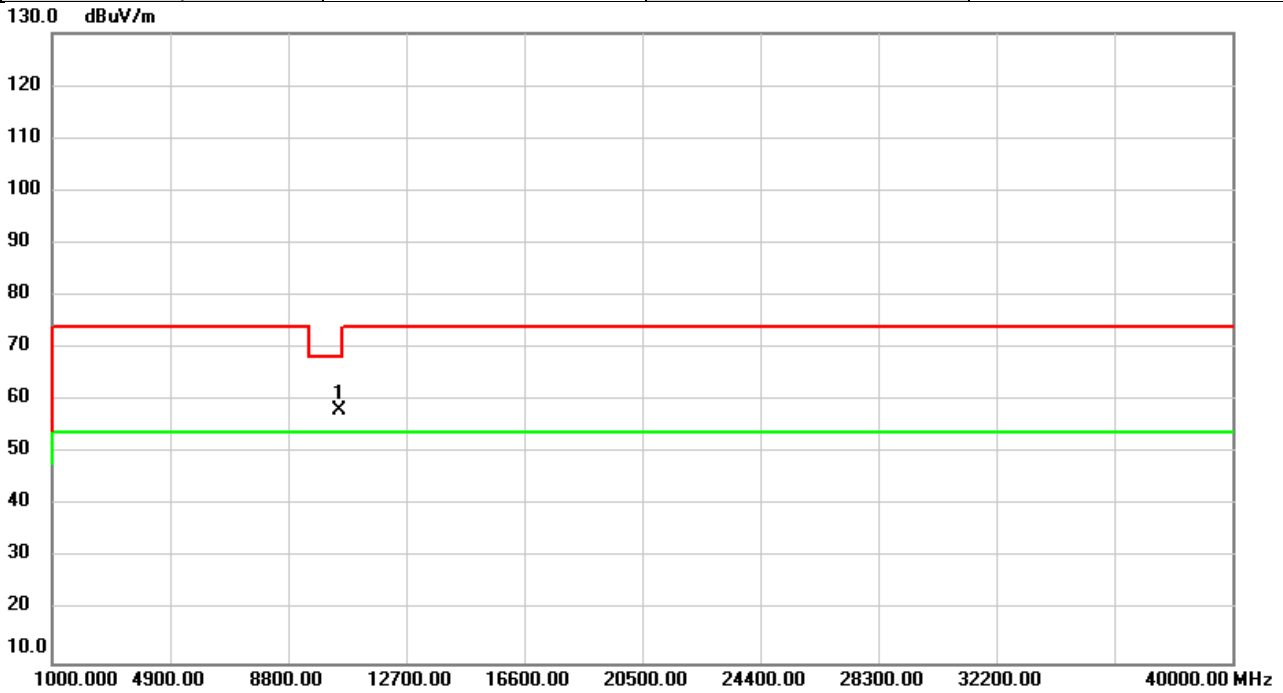


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10500.00	53.23	5.00	58.23	68.20	-9.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2020/7/6
Test Frequency	5250	Polarization	Horizontal
Temp	22°C	Hum.	52%

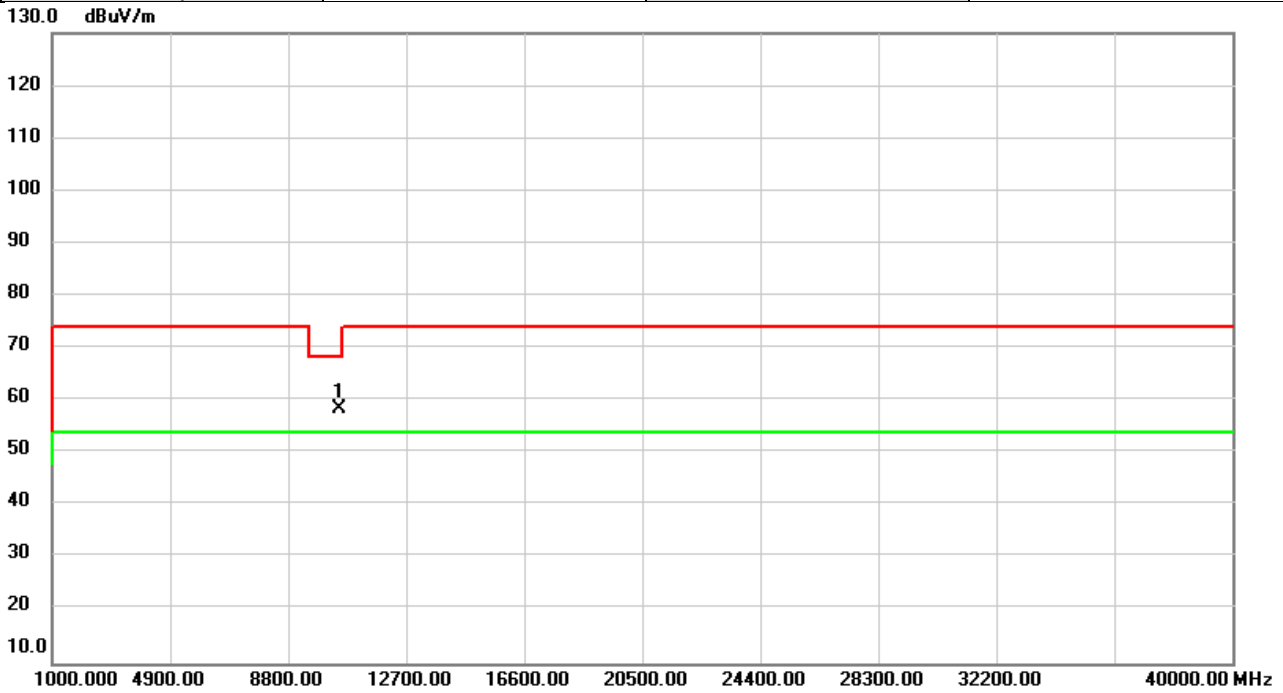


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10500.00	53.37	5.00	58.37	68.20	-9.83	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2020/7/6
Test Frequency	5570	Polarization	Vertical
Temp	22°C	Hum.	52%

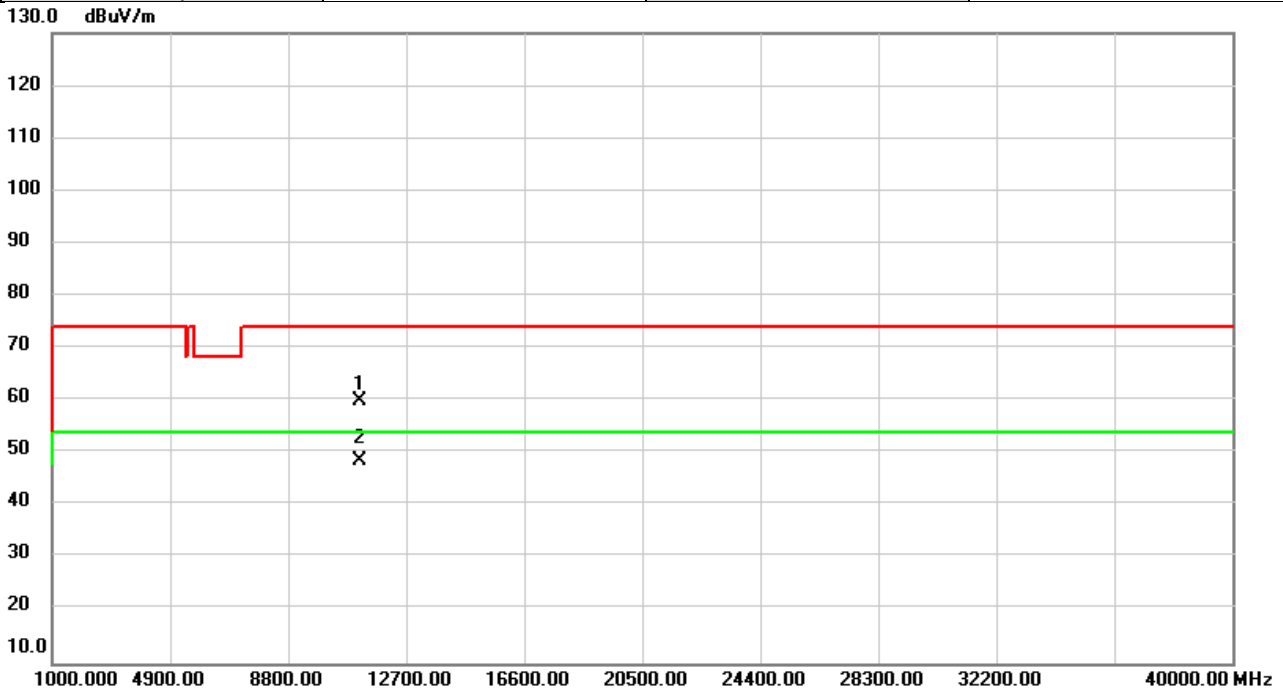


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11140.00	53.71	6.12	59.83	74.00	-14.17	peak	
2	*	11140.00	42.37	6.12	48.49	54.00	-5.51	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2020/7/6
Test Frequency	5570	Polarization	Horizontal
Temp	22°C	Hum.	52%

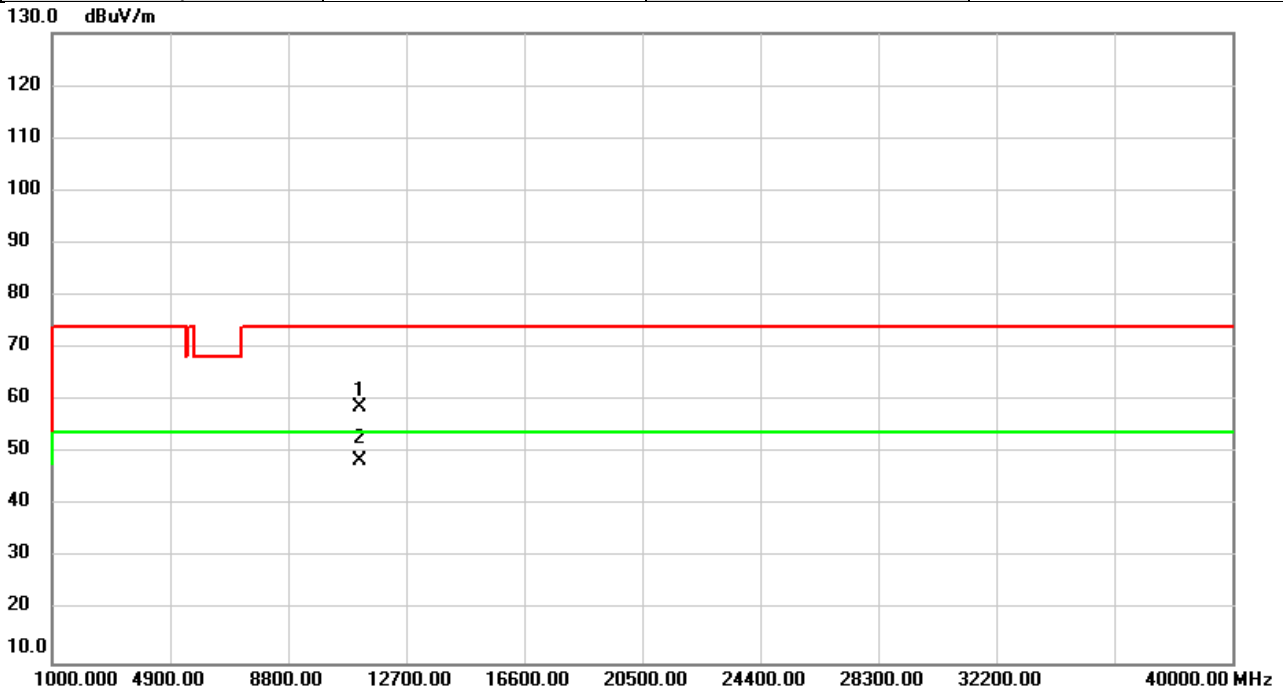


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11140.00	52.66	6.12	58.78	74.00	-15.22	peak	
2	*	11140.00	42.35	6.12	48.47	54.00	-5.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5180	Polarization	Vertical
Temp	22°C	Hum.	52%

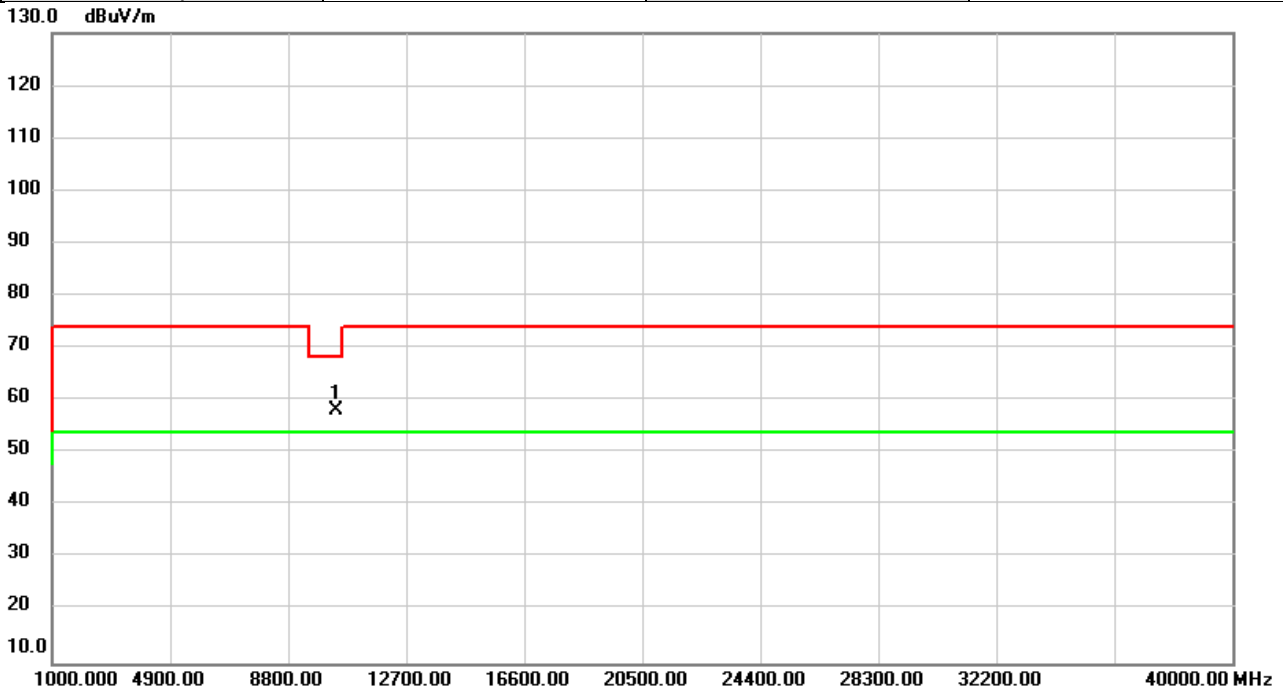


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	53.30	4.73	58.03	68.20	-10.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5180	Polarization	Horizontal
Temp	22°C	Hum.	52%

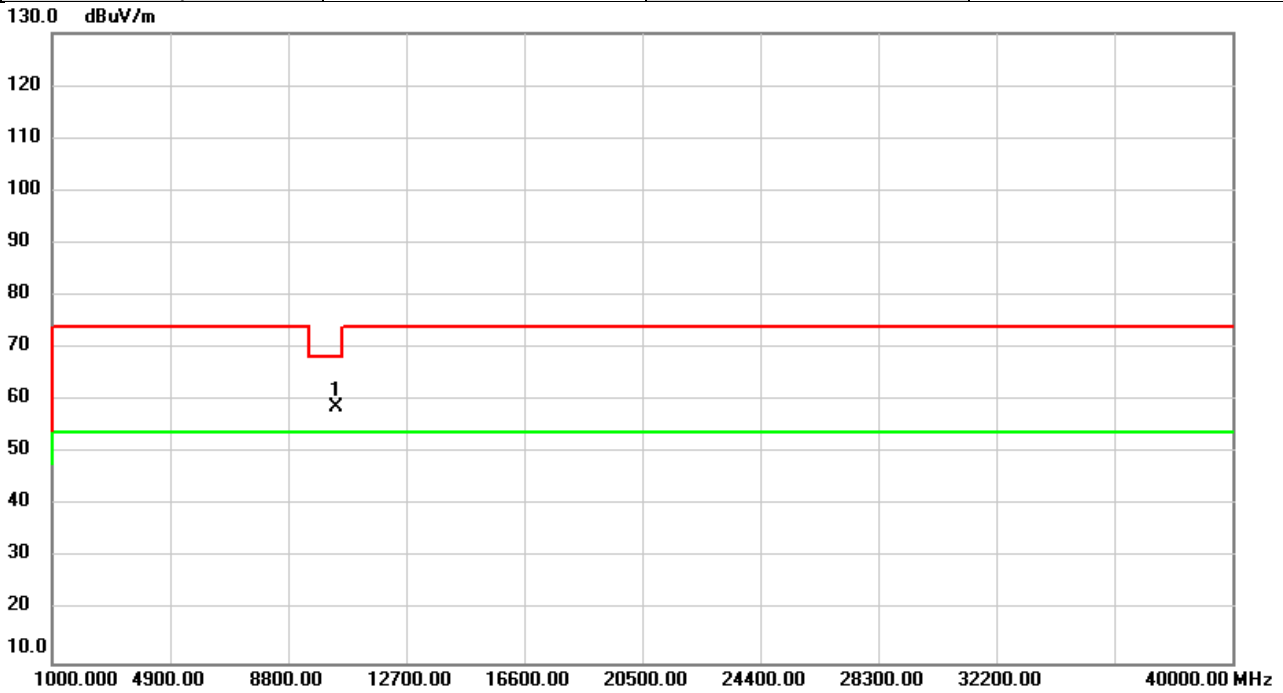


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	54.06	4.73	58.79	68.20	-9.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5200	Polarization	Vertical
Temp	22°C	Hum.	52%

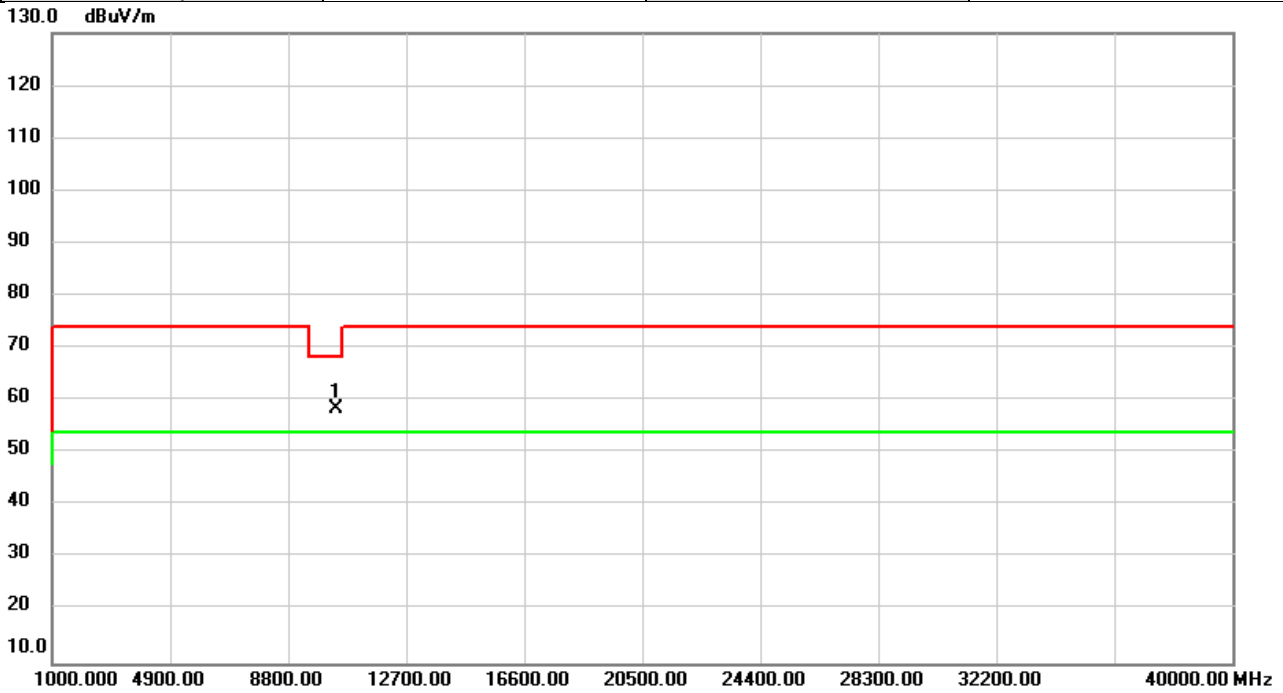


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	53.54	4.80	58.34	68.20	-9.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5200	Polarization	Horizontal
Temp	22°C	Hum.	52%

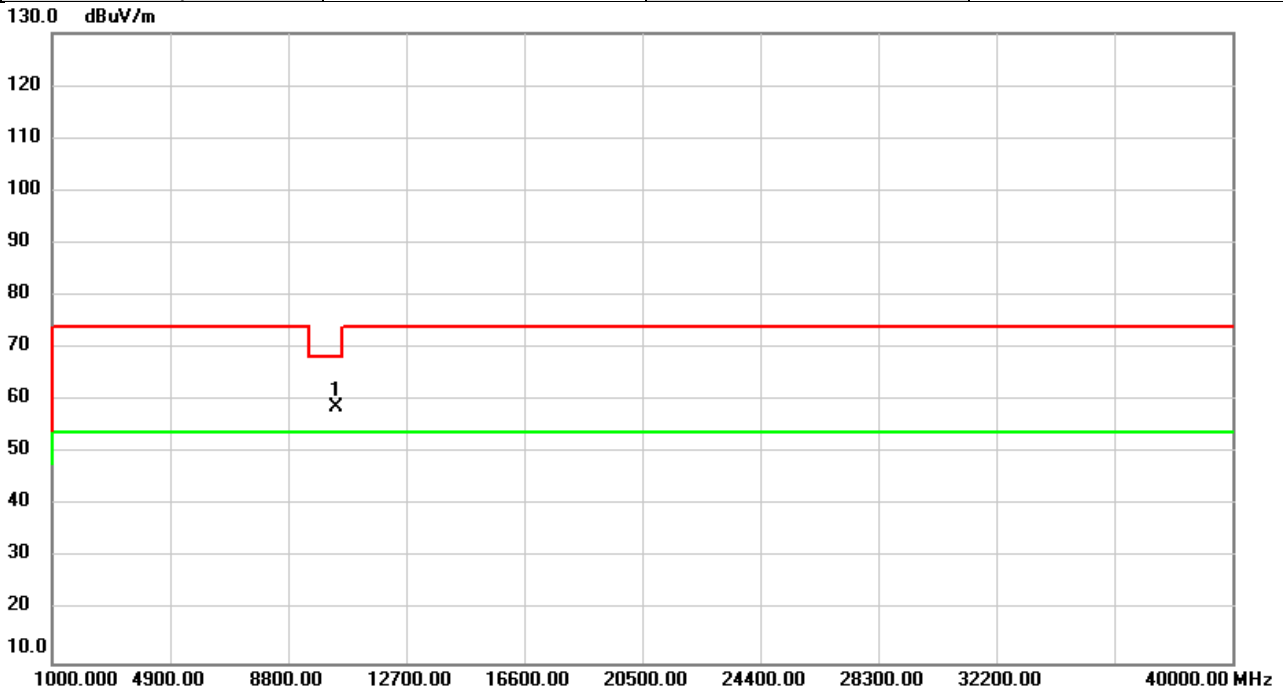


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	53.97	4.80	58.77	68.20	-9.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5240	Polarization	Vertical
Temp	22°C	Hum.	52%

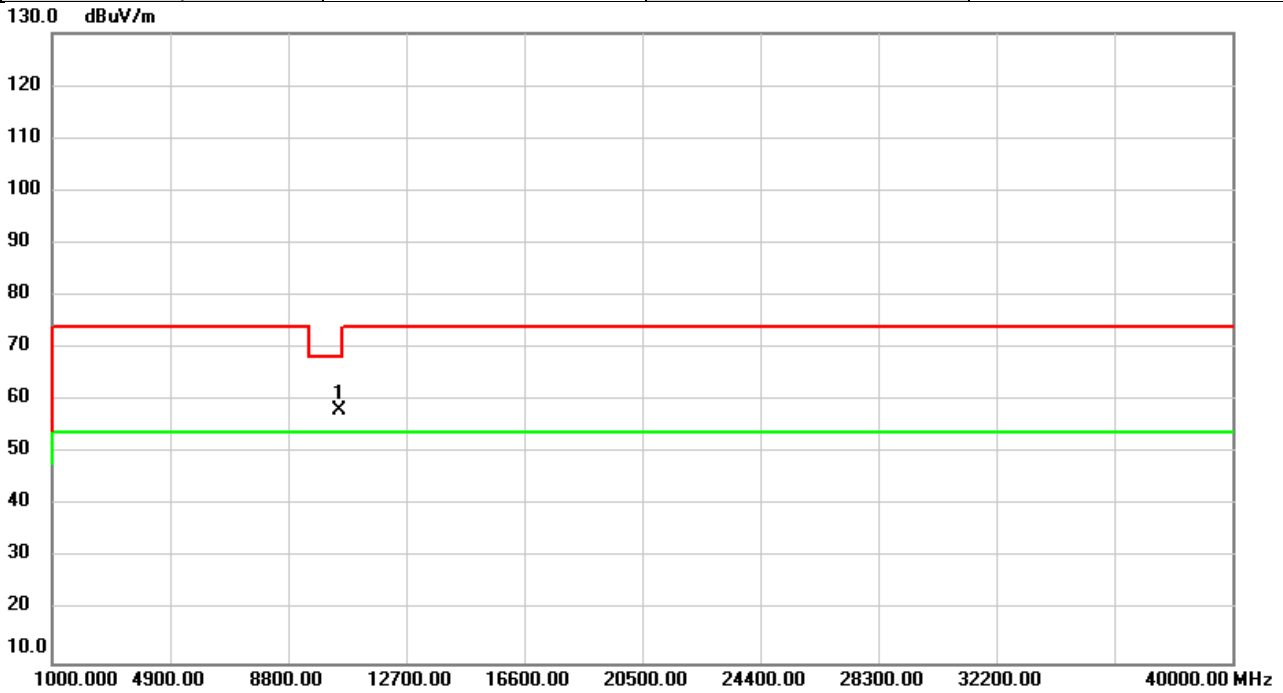


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	53.19	4.96	58.15	68.20	-10.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5240	Polarization	Horizontal
Temp	22°C	Hum.	52%

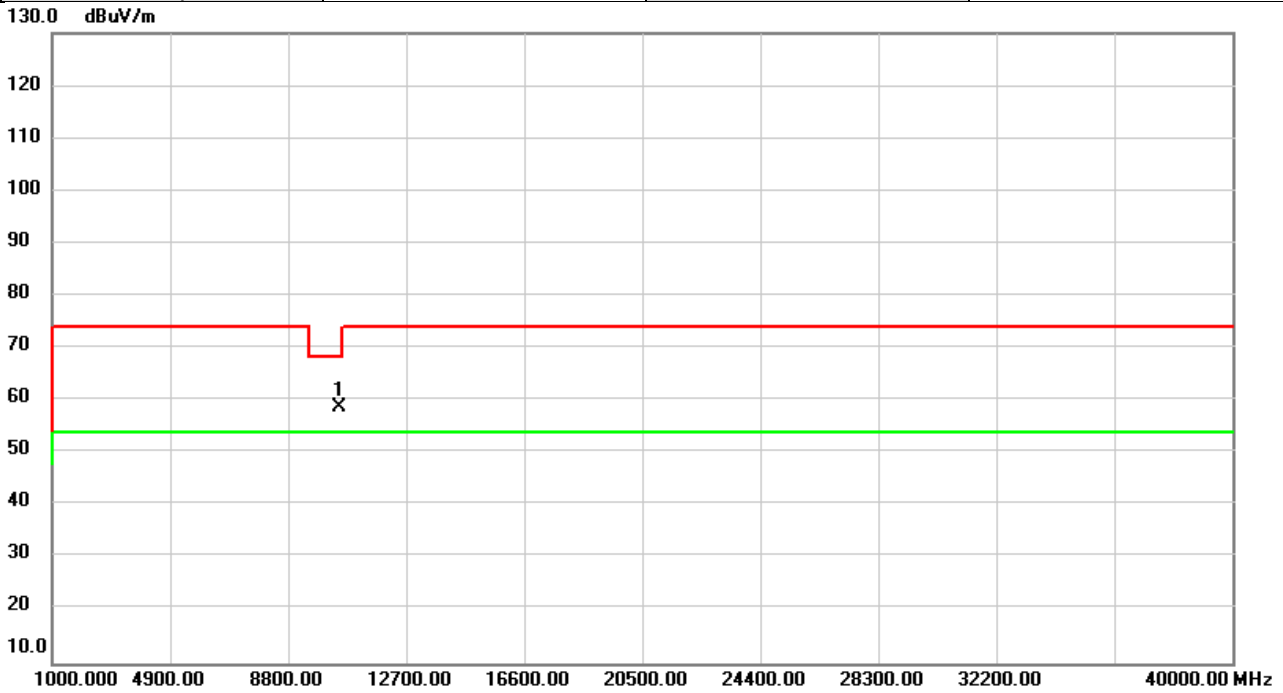


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	53.82	4.96	58.78	68.20	-9.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5260	Polarization	Vertical
Temp	22°C	Hum.	52%

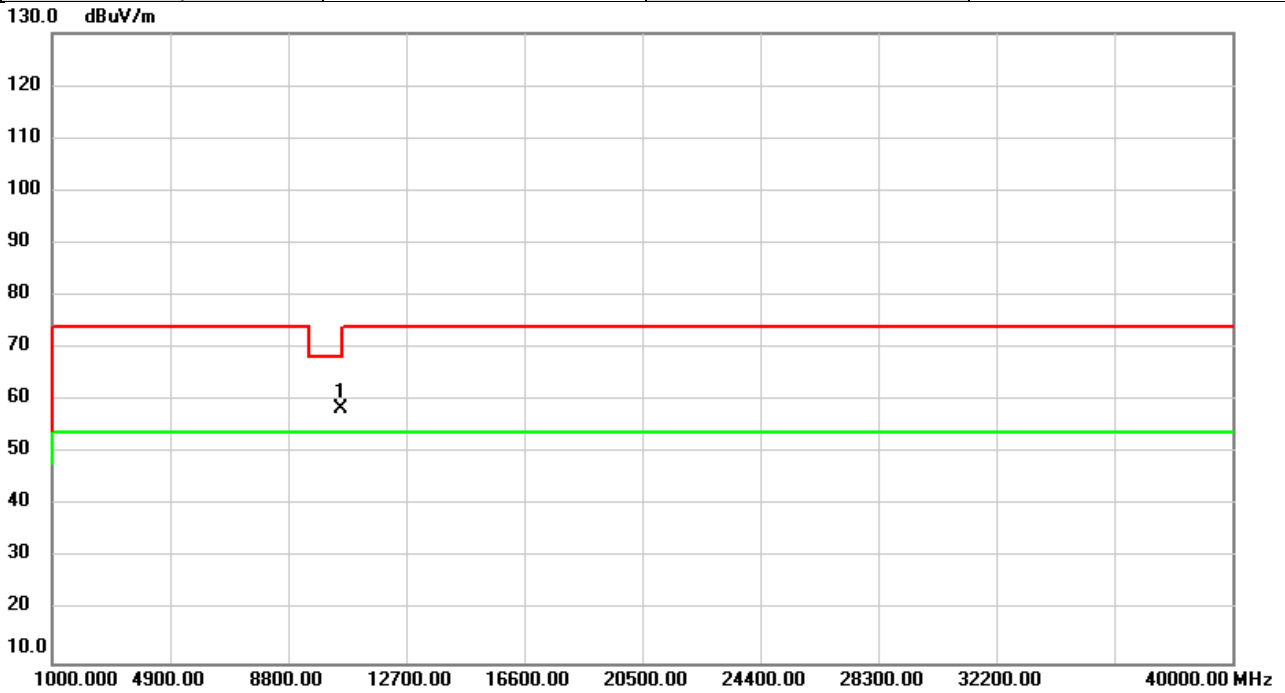


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	53.53	5.06	58.59	68.20	-9.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5260	Polarization	Horizontal
Temp	22°C	Hum.	52%

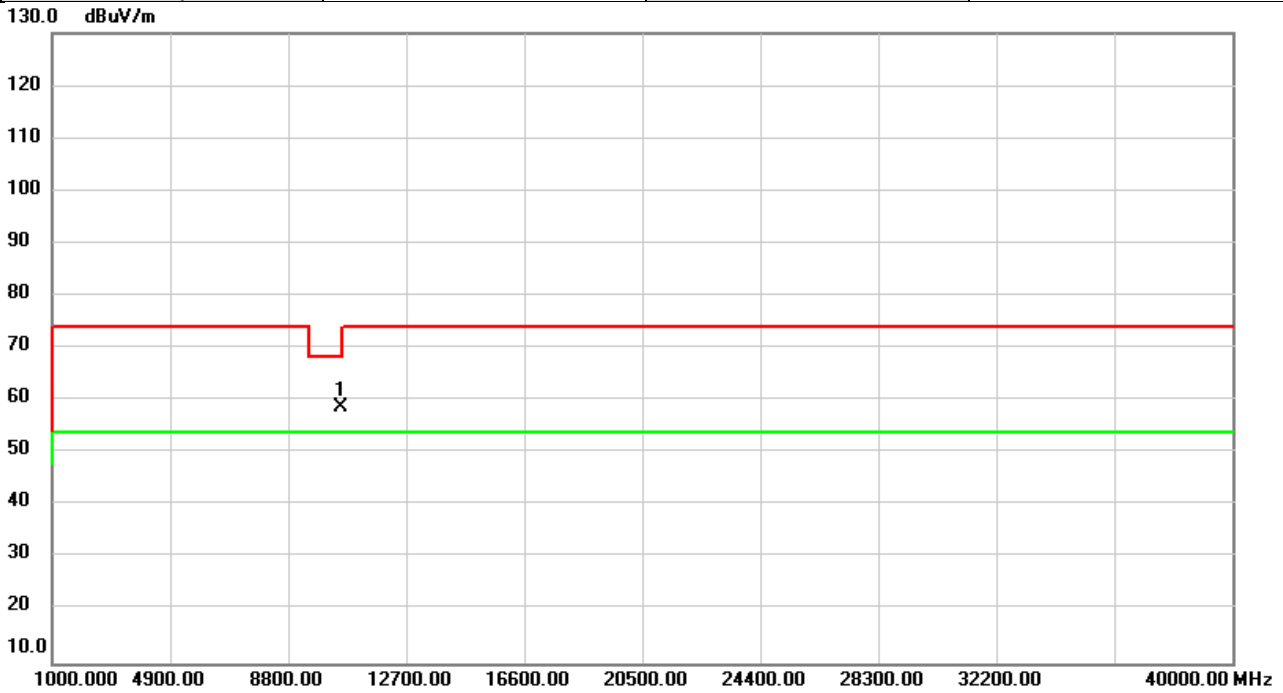


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	53.81	5.06	58.87	68.20	-9.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5300	Polarization	Vertical
Temp	22°C	Hum.	52%

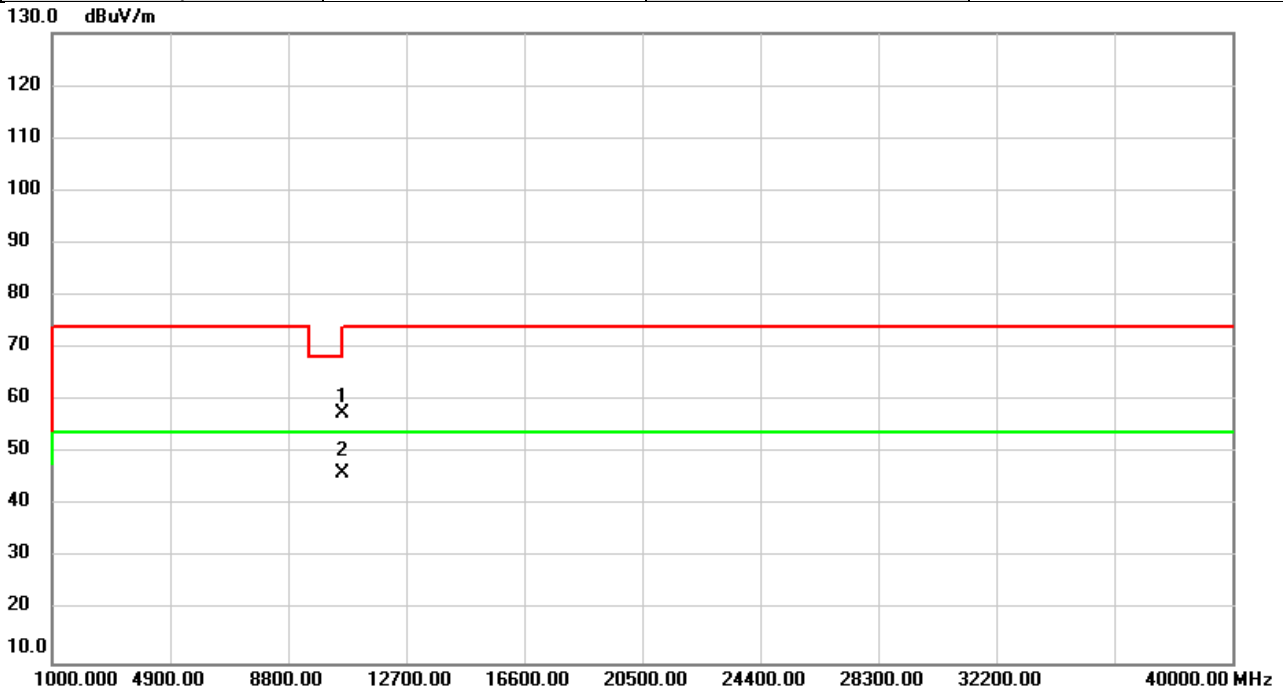


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10600.00	52.25	5.31	57.56	68.20	-10.64	peak	
2	*	10600.00	40.96	5.31	46.27	54.00	-7.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5300	Polarization	Horizontal
Temp	22°C	Hum.	52%

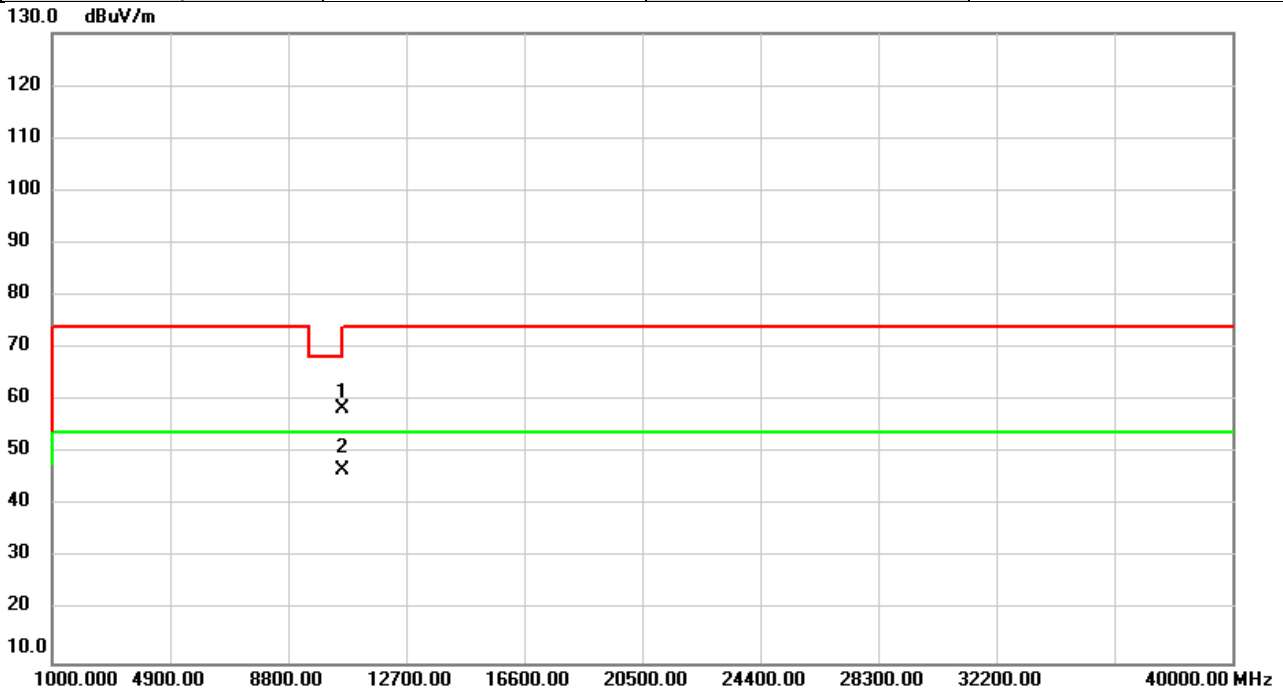


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10600.00	53.24	5.31	58.55	68.20	-9.65	peak	
2	*	10600.00	41.34	5.31	46.65	54.00	-7.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5320	Polarization	Vertical
Temp	22°C	Hum.	52%

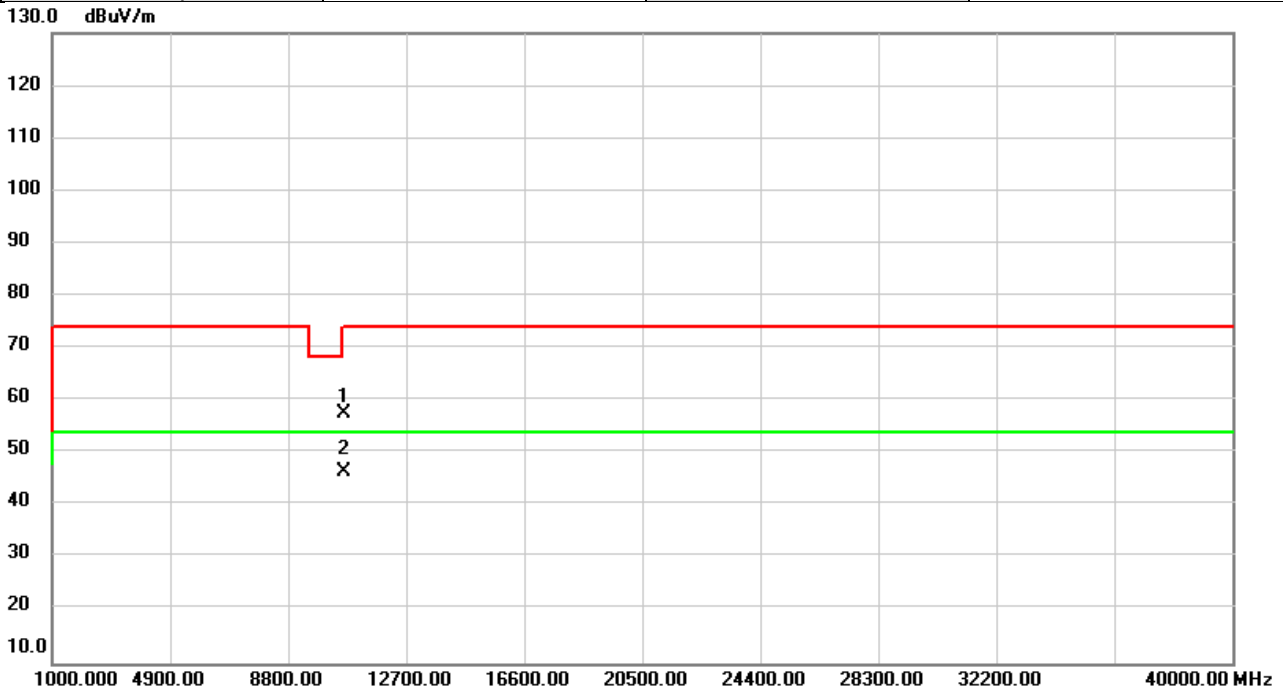


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	51.99	5.43	57.42	74.00	-16.58	peak	
2	*	10640.00	40.93	5.43	46.36	54.00	-7.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5320	Polarization	Horizontal
Temp	22°C	Hum.	52%

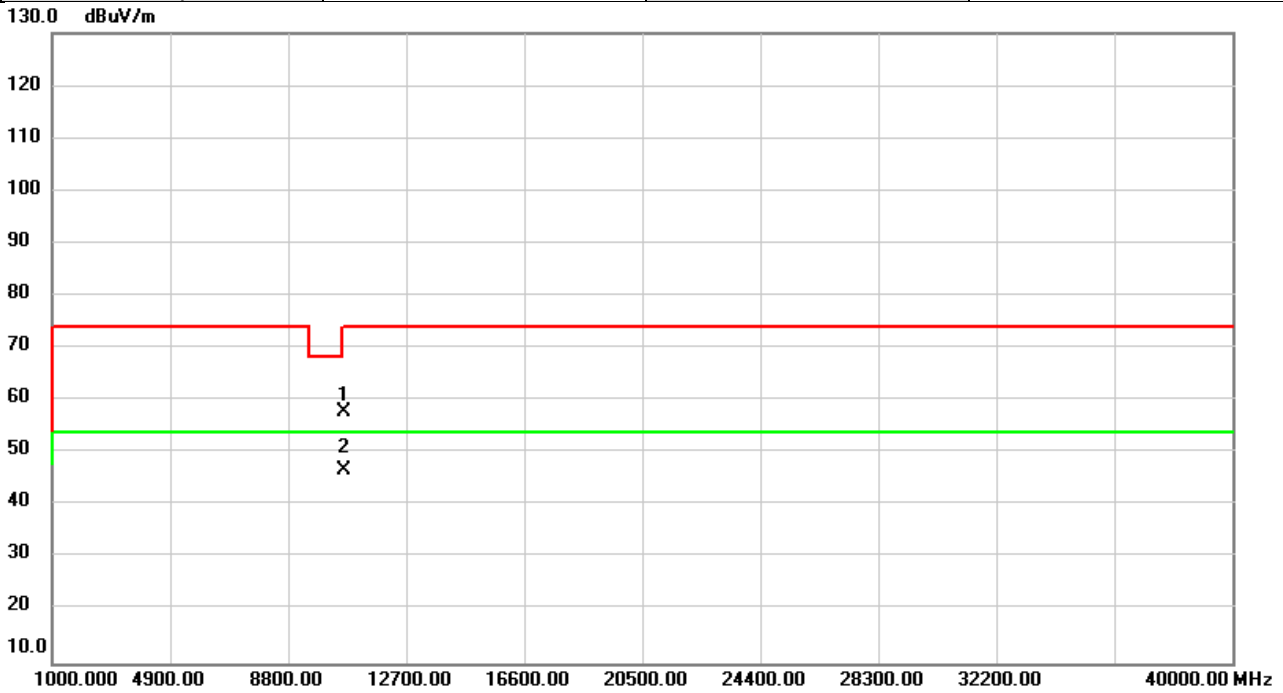


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	52.27	5.43	57.70	74.00	-16.30	peak	
2	*	10640.00	41.27	5.43	46.70	54.00	-7.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5500	Polarization	Vertical
Temp	22°C	Hum.	52%

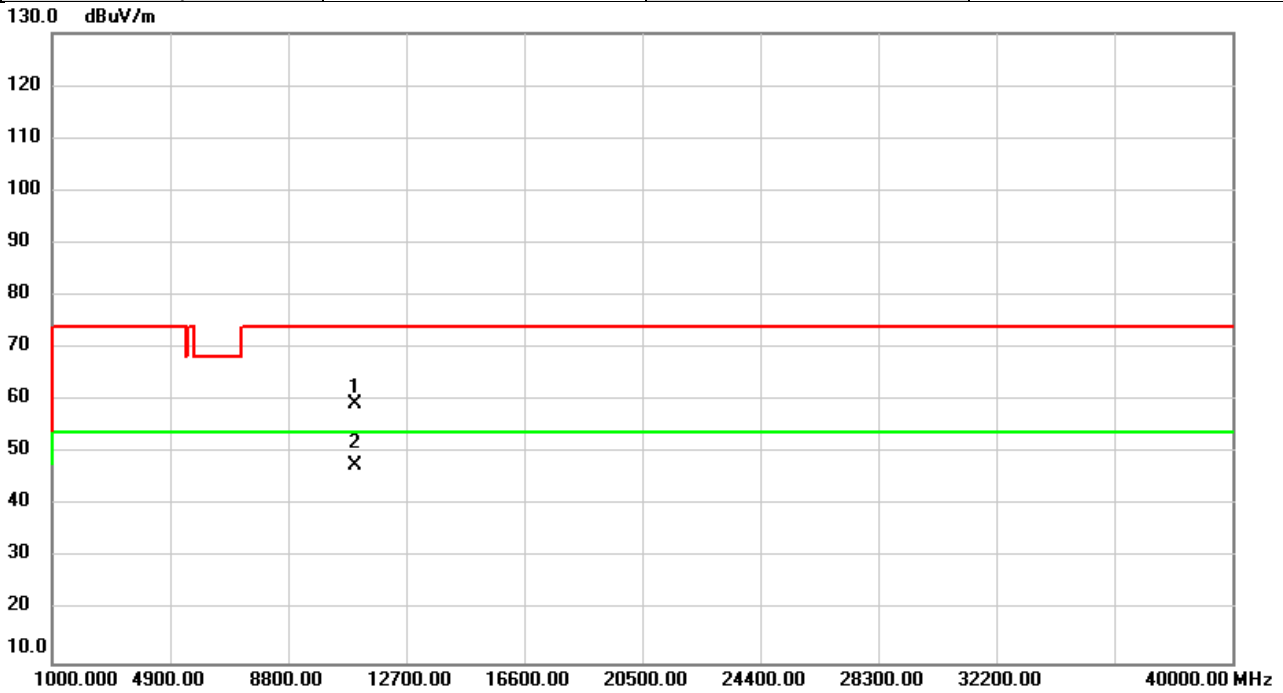


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11000.00	52.86	6.54	59.40	74.00	-14.60	peak	
2	*	11000.00	41.12	6.54	47.66	54.00	-6.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5500	Polarization	Horizontal
Temp	22°C	Hum.	52%

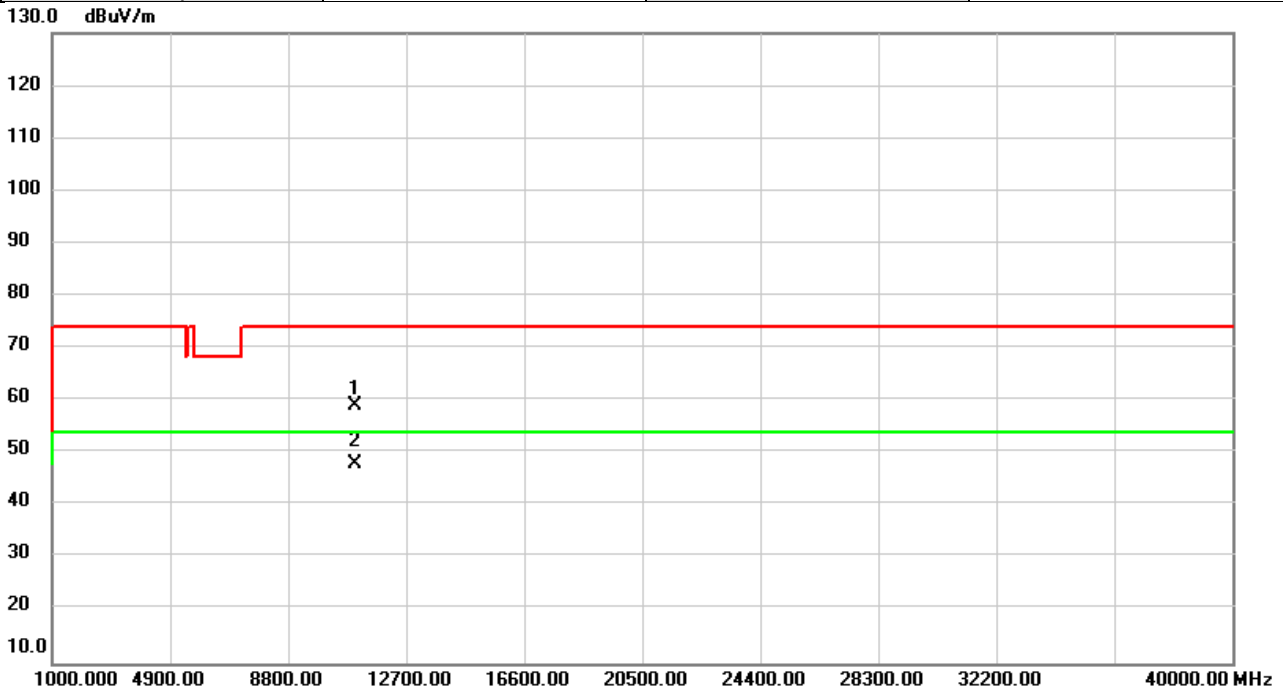


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11000.00	52.46	6.54	59.00	74.00	-15.00	peak	
2	*	11000.00	41.41	6.54	47.95	54.00	-6.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5580	Polarization	Vertical
Temp	22°C	Hum.	52%

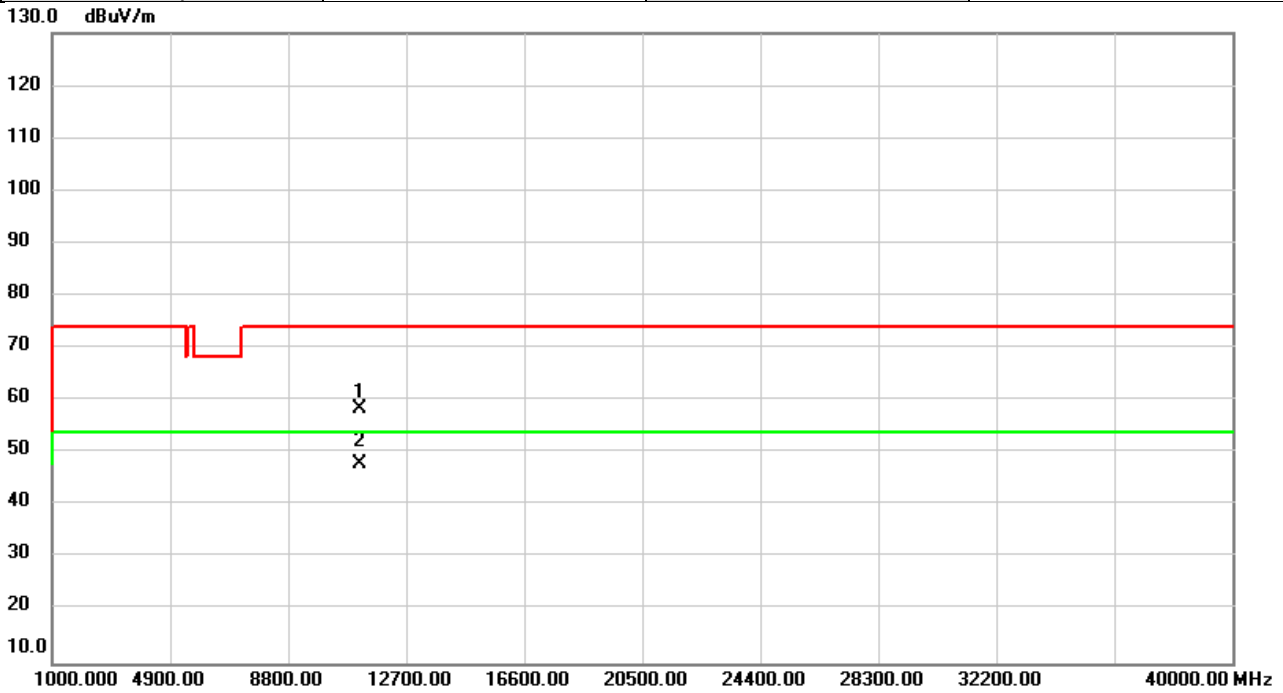


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11160.00	52.43	6.05	58.48	74.00	-15.52	peak	
2	*	11160.00	42.01	6.05	48.06	54.00	-5.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5580	Polarization	Horizontal
Temp	22°C	Hum.	52%

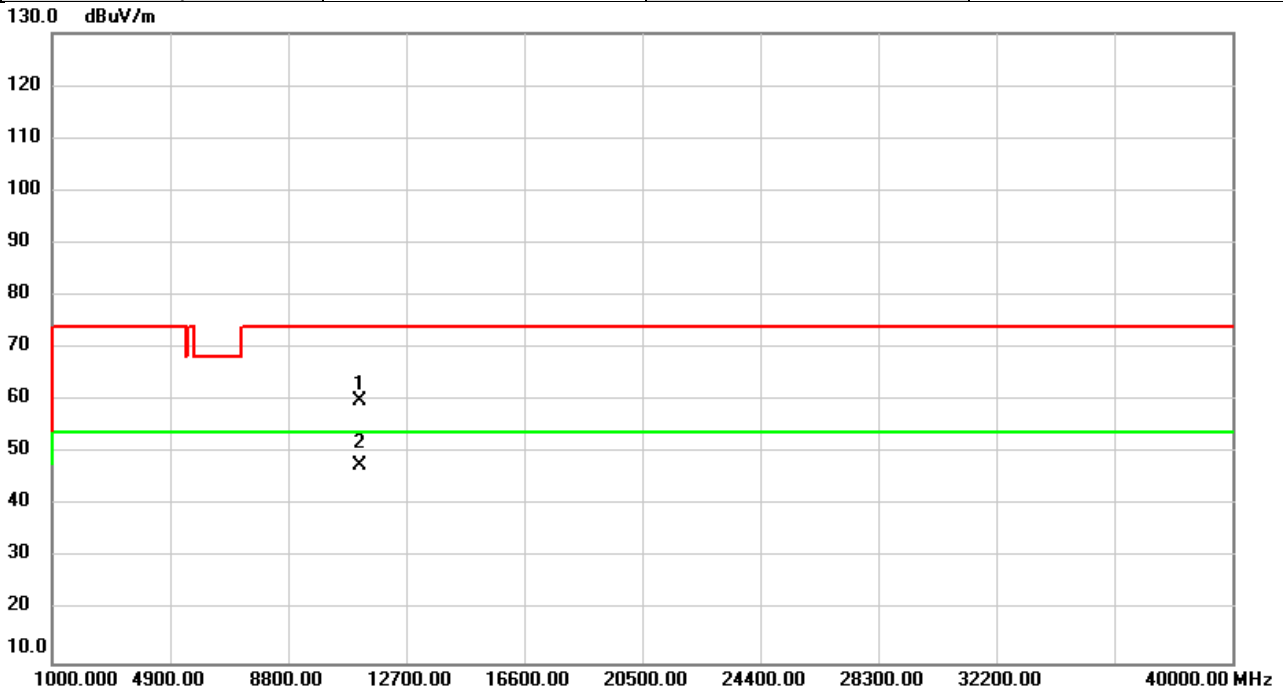


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11160.00	53.91	6.05	59.96	74.00	-14.04	peak	
2	*	11160.00	41.75	6.05	47.80	54.00	-6.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5700	Polarization	Vertical
Temp	22°C	Hum.	52%

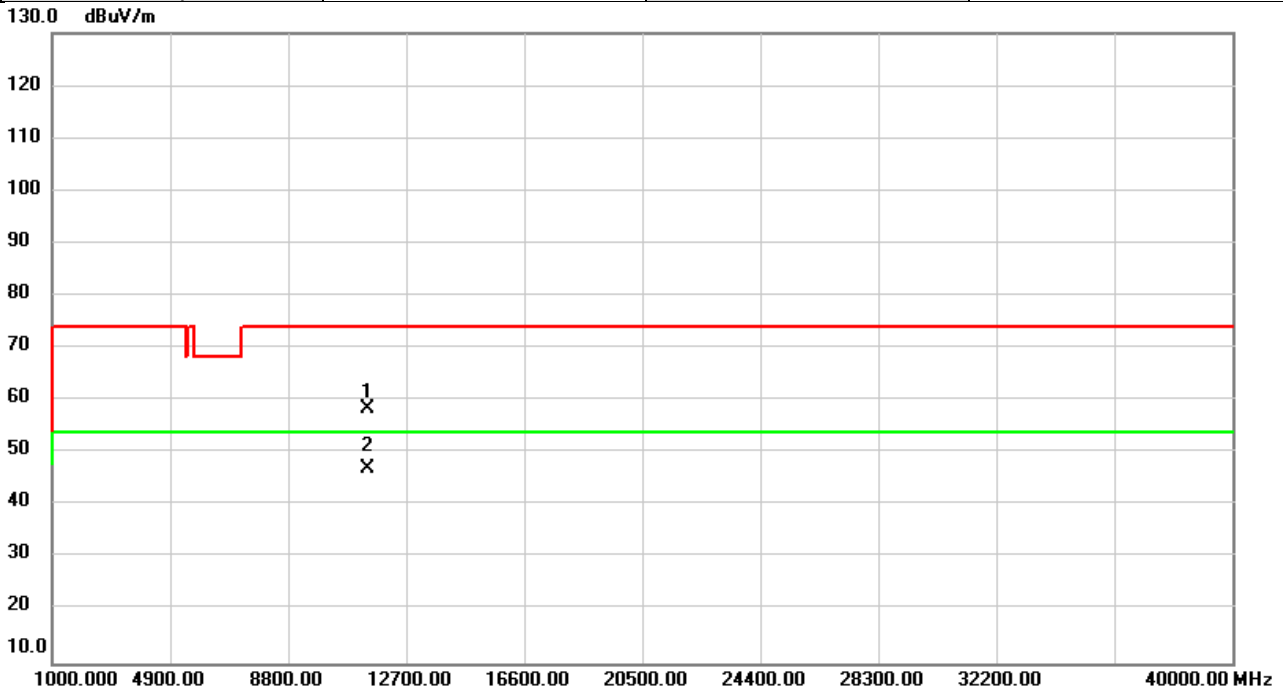


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11400.00	53.25	5.33	58.58	74.00	-15.42	peak	
2	*	11400.00	41.82	5.33	47.15	54.00	-6.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5700	Polarization	Horizontal
Temp	22°C	Hum.	52%

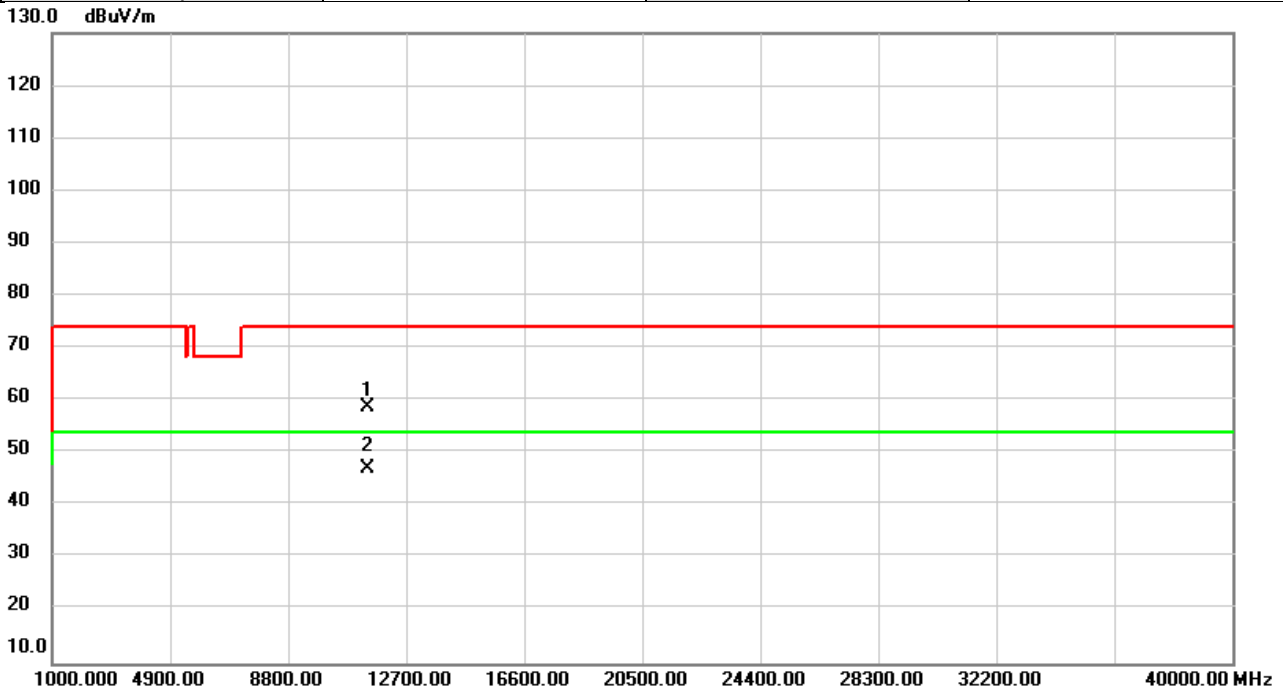


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11400.00	53.39	5.33	58.72	74.00	-15.28	peak	
2	*	11400.00	41.69	5.33	47.02	54.00	-6.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5745	Polarization	Vertical
Temp	22°C	Hum.	52%

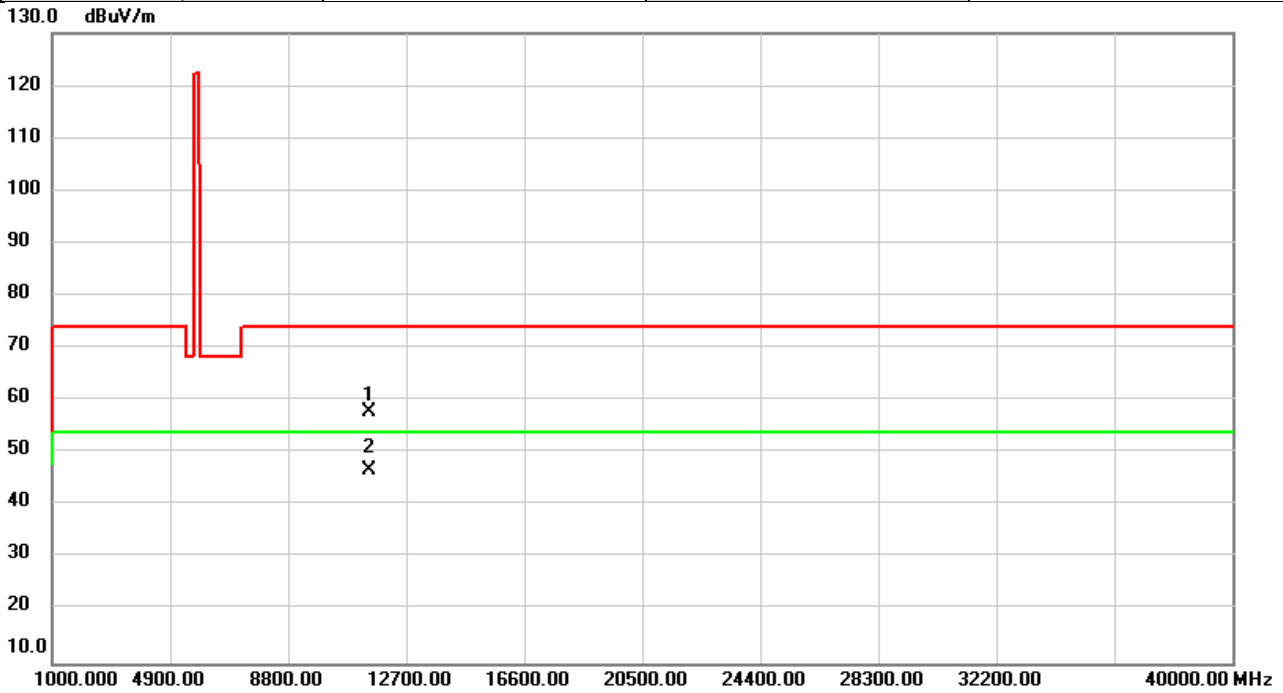


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11490.00	52.89	5.06	57.95	74.00	-16.05	peak	
2	*	11490.00	41.55	5.06	46.61	54.00	-7.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5745	Polarization	Horizontal
Temp	22°C	Hum.	52%

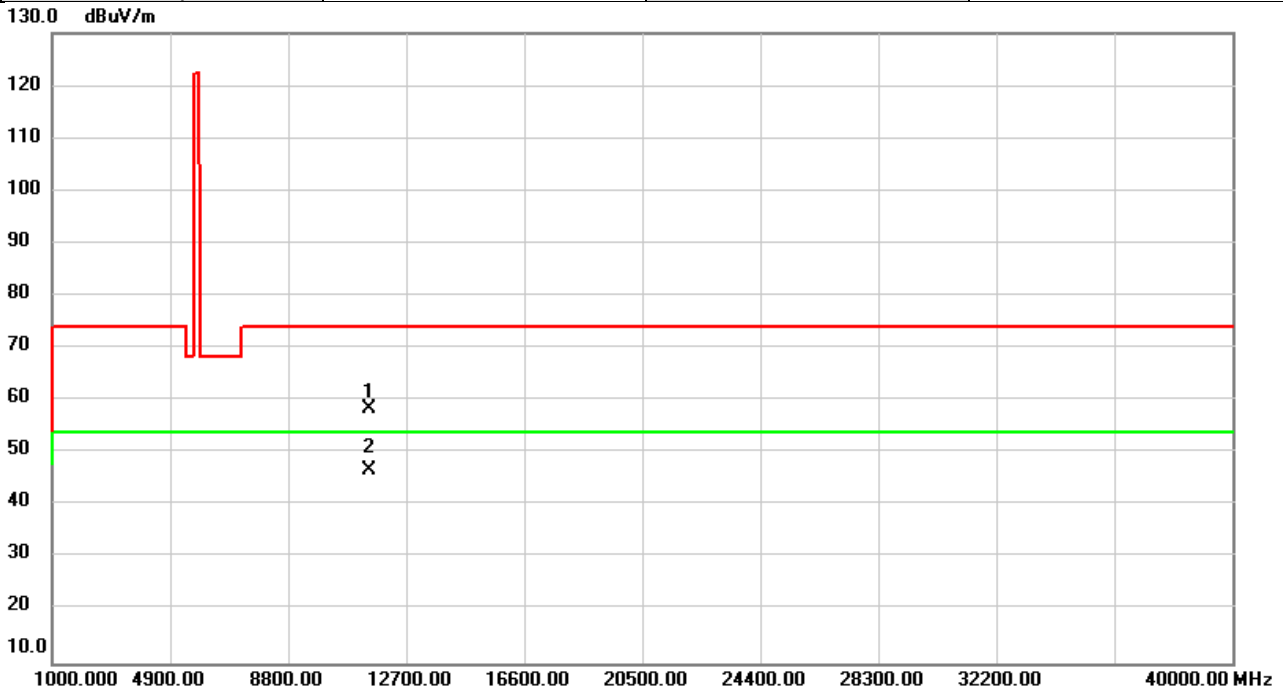


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11490.00	53.41	5.06	58.47	74.00	-15.53	peak	
2	*	11490.00	41.76	5.06	46.82	54.00	-7.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5785	Polarization	Vertical
Temp	22°C	Hum.	52%

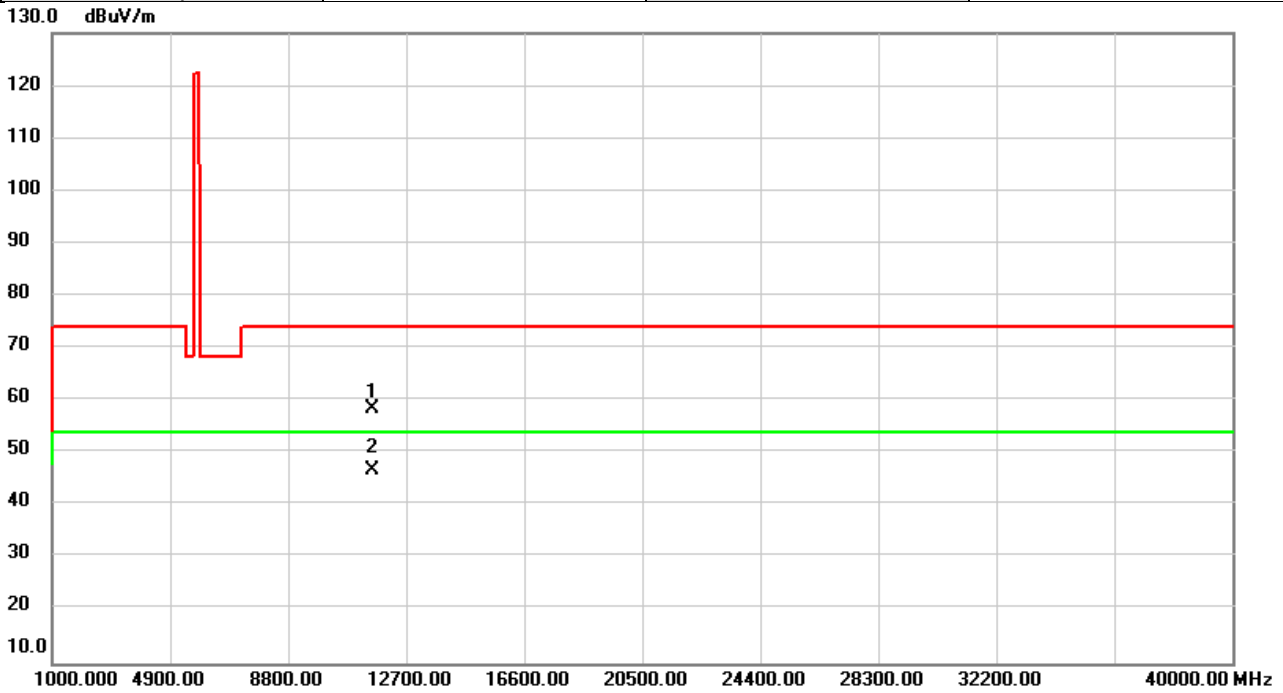


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.00	53.53	4.87	58.40	74.00	-15.60	peak	
2	*	11570.00	41.91	4.87	46.78	54.00	-7.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5785	Polarization	Horizontal
Temp	22°C	Hum.	52%

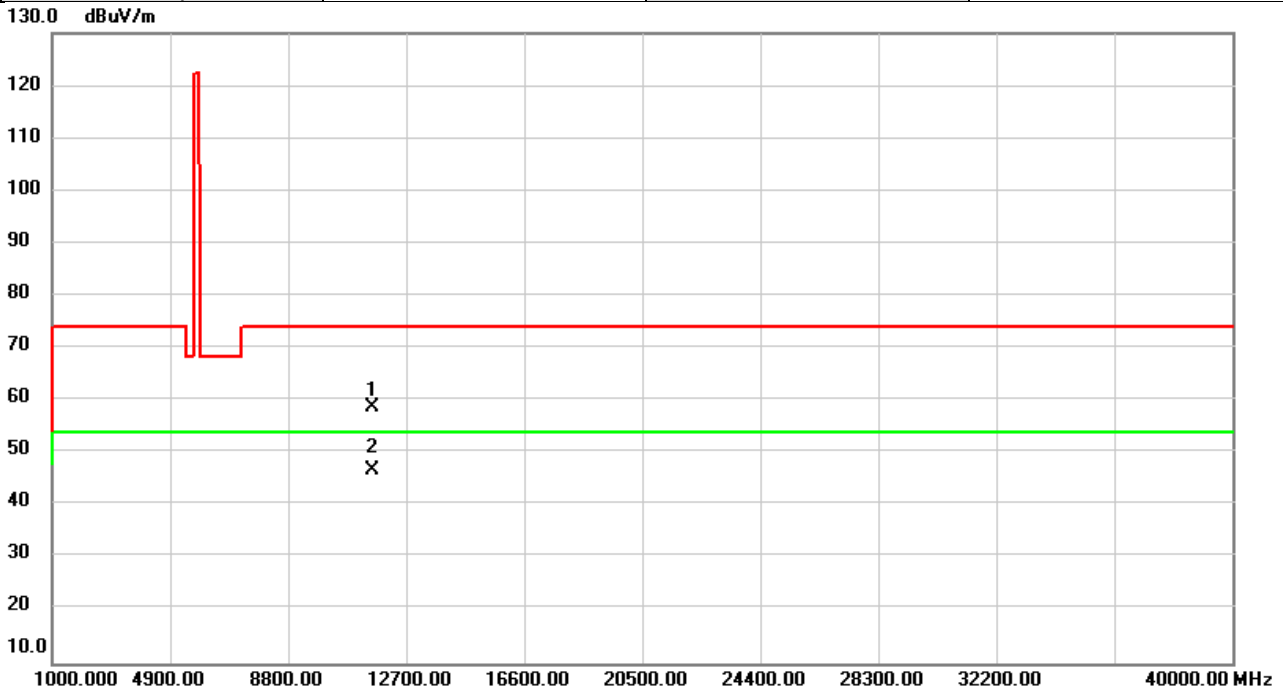


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.00	53.77	4.87	58.64	74.00	-15.36	peak	
2	*	11570.00	41.79	4.87	46.66	54.00	-7.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5825	Polarization	Vertical
Temp	22°C	Hum.	52%

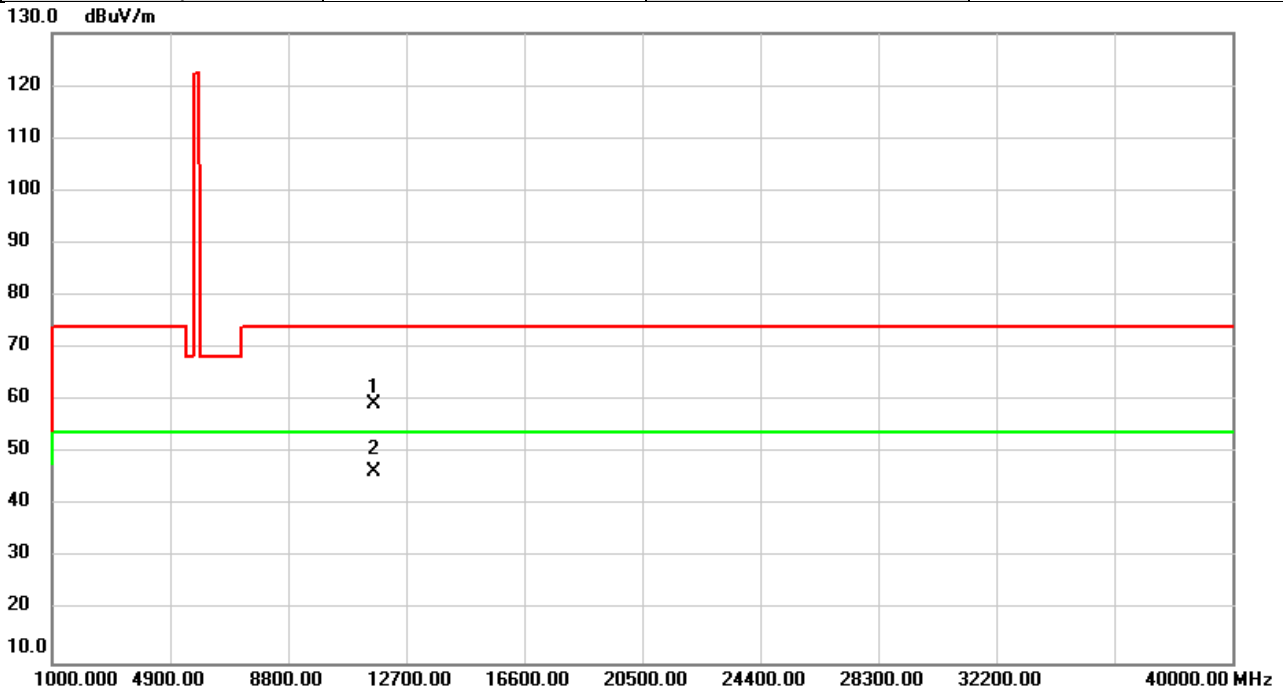


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11650.00	54.58	4.69	59.27	74.00	-14.73	peak	
2	*	11650.00	41.66	4.69	46.35	54.00	-7.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW20)	Test Date	2020/7/6
Test Frequency	5825	Polarization	Horizontal
Temp	22°C	Hum.	52%

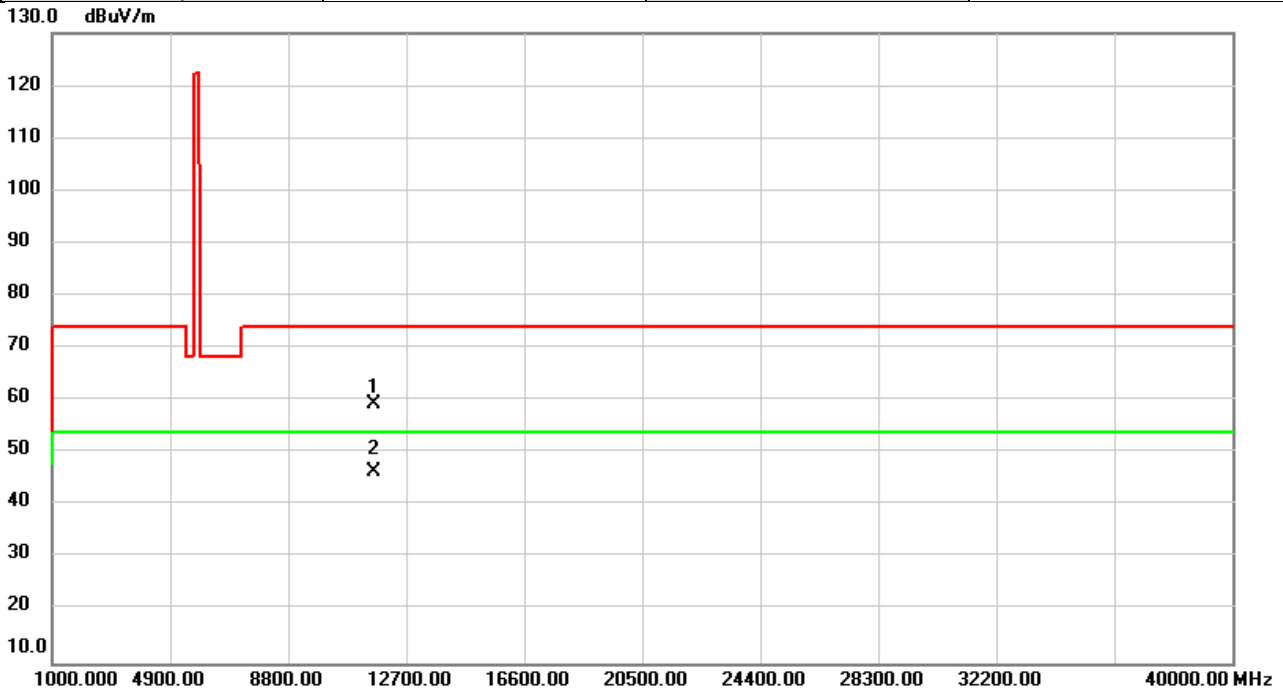


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11650.00	54.74	4.69	59.43	74.00	-14.57	peak	
2	*	11650.00	41.73	4.69	46.42	54.00	-7.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/6
Test Frequency	5190	Polarization	Vertical
Temp	22°C	Hum.	52%

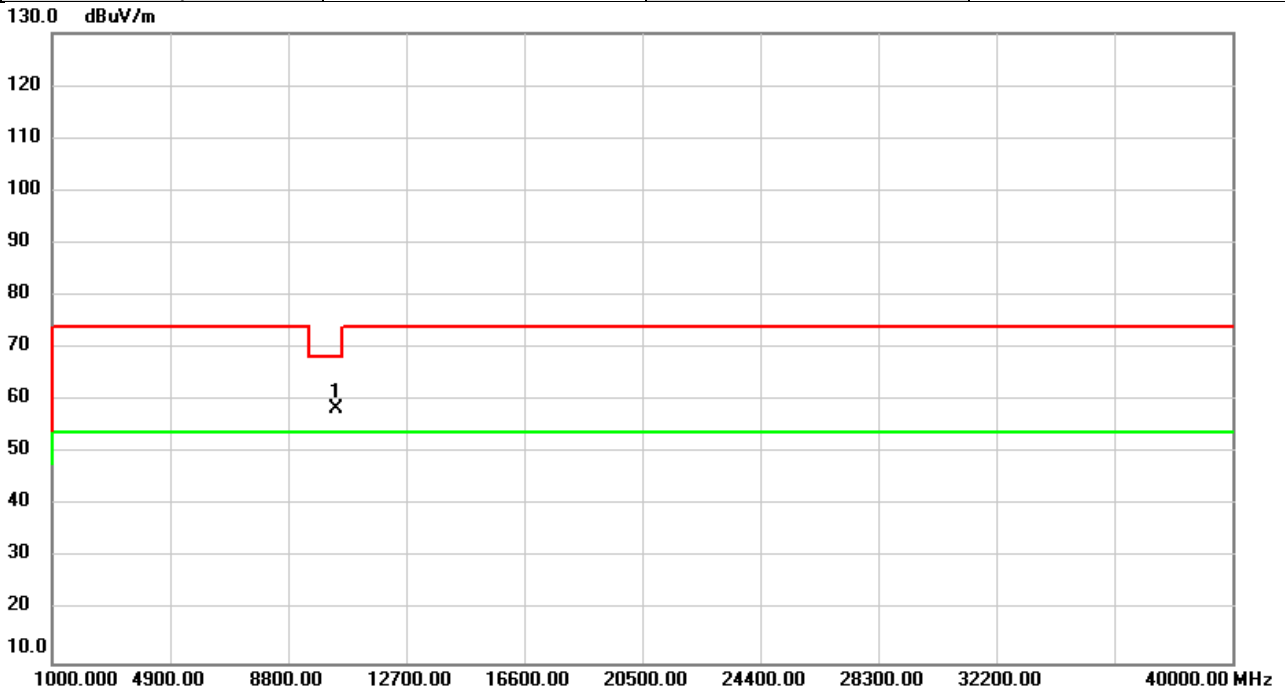


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	53.65	4.76	58.41	68.20	-9.79	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/6
Test Frequency	5190	Polarization	Horizontal
Temp	22°C	Hum.	52%

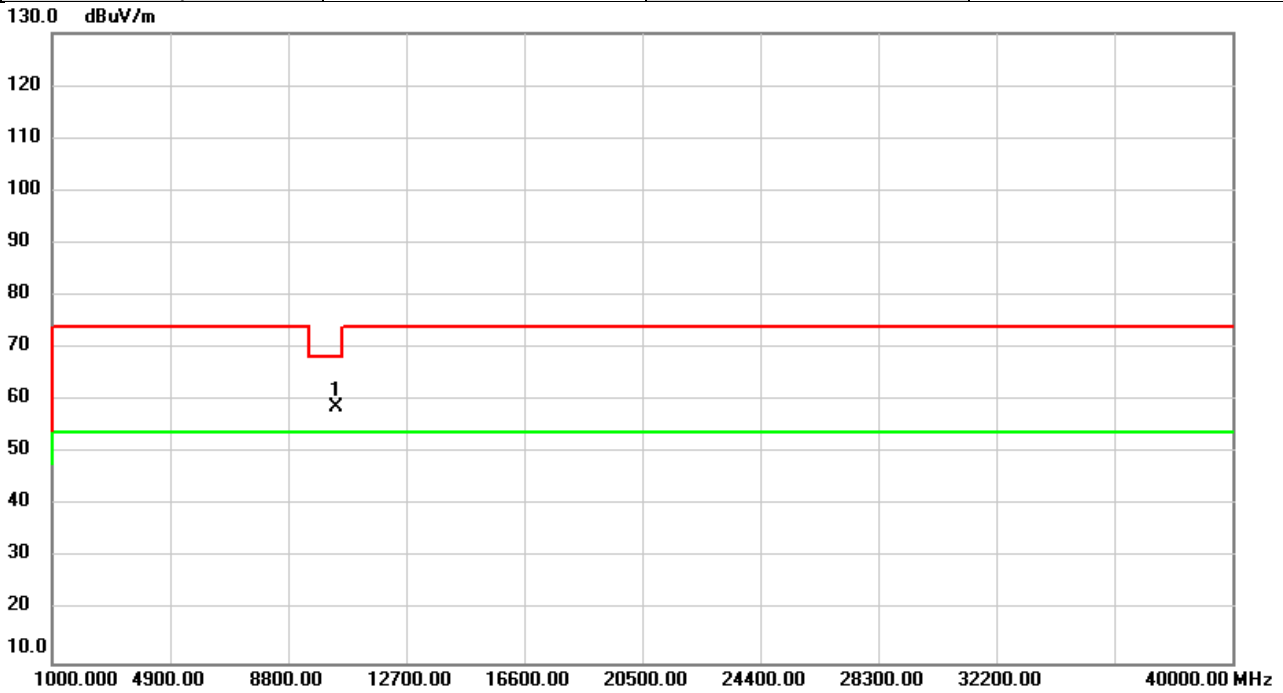


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	54.02	4.76	58.78	68.20	-9.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/6
Test Frequency	5230	Polarization	Vertical
Temp	22°C	Hum.	52%

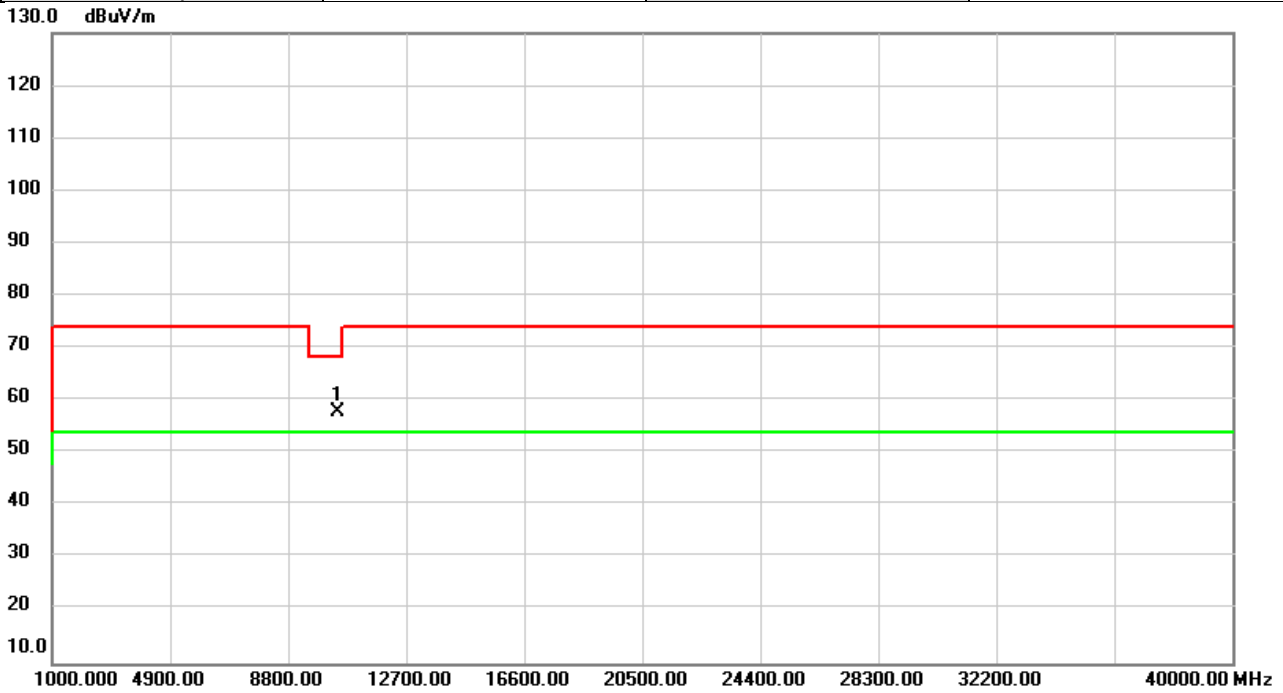


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	53.07	4.92	57.99	68.20	-10.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/6
Test Frequency	5230	Polarization	Horizontal
Temp	22°C	Hum.	52%

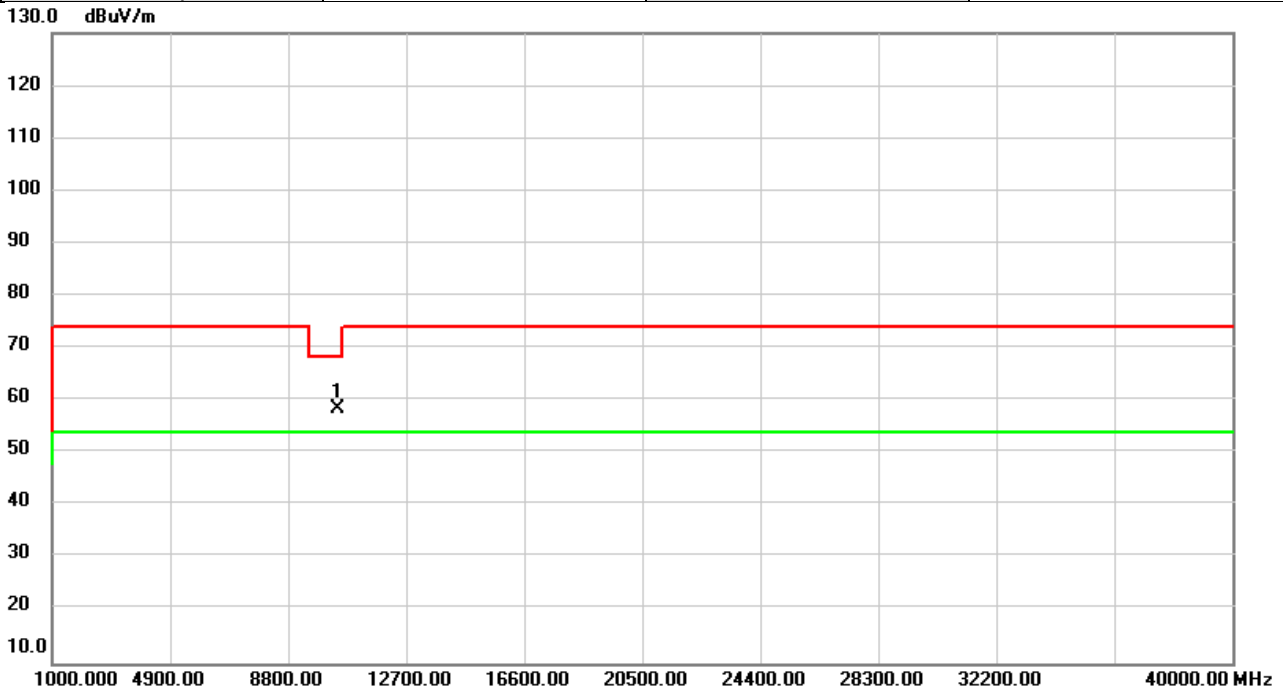


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	53.44	4.92	58.36	68.20	-9.84	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/6
Test Frequency	5270	Polarization	Vertical
Temp	22°C	Hum.	52%

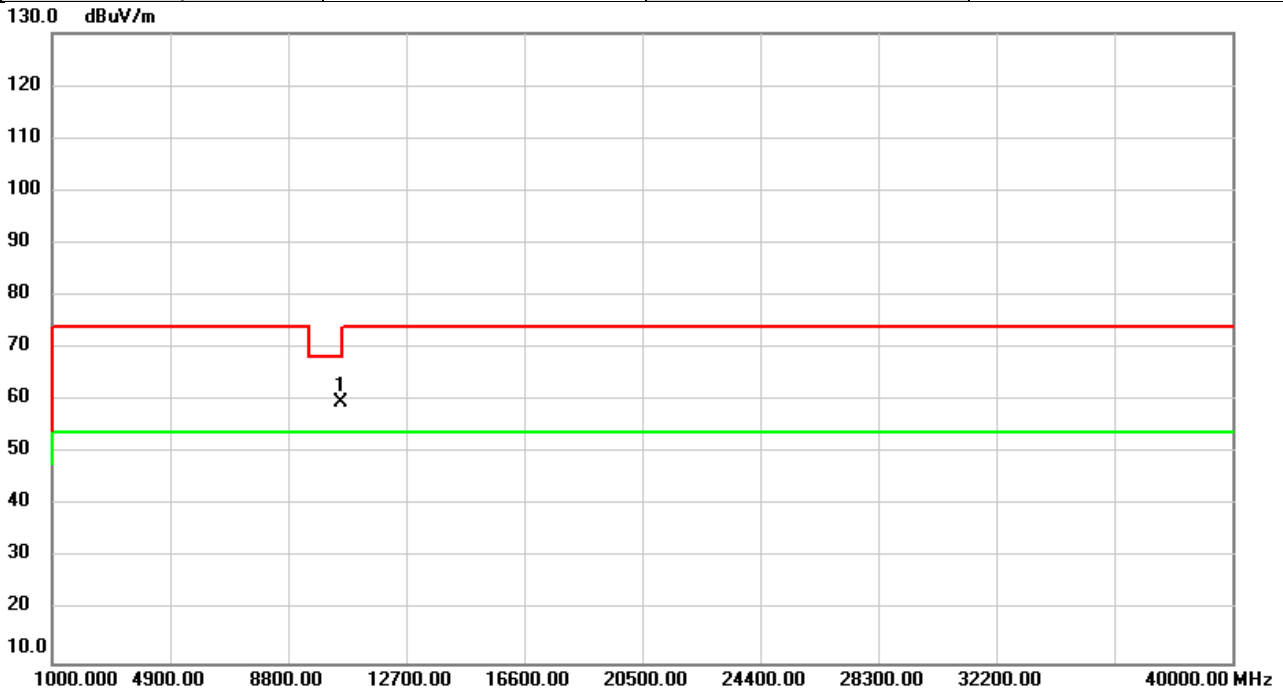


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	54.60	5.12	59.72	68.20	-8.48	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/6
Test Frequency	5270	Polarization	Horizontal
Temp	22°C	Hum.	52%

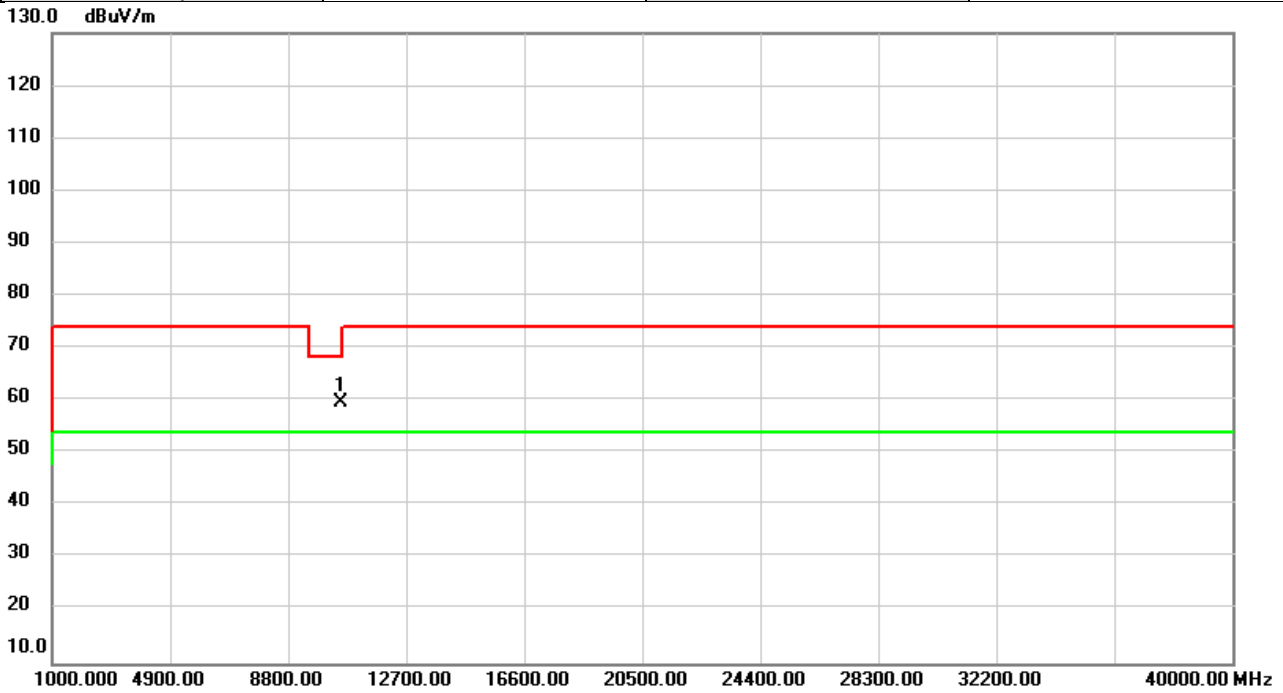


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	54.59	5.12	59.71	68.20	-8.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/6
Test Frequency	5310	Polarization	Vertical
Temp	22°C	Hum.	52%

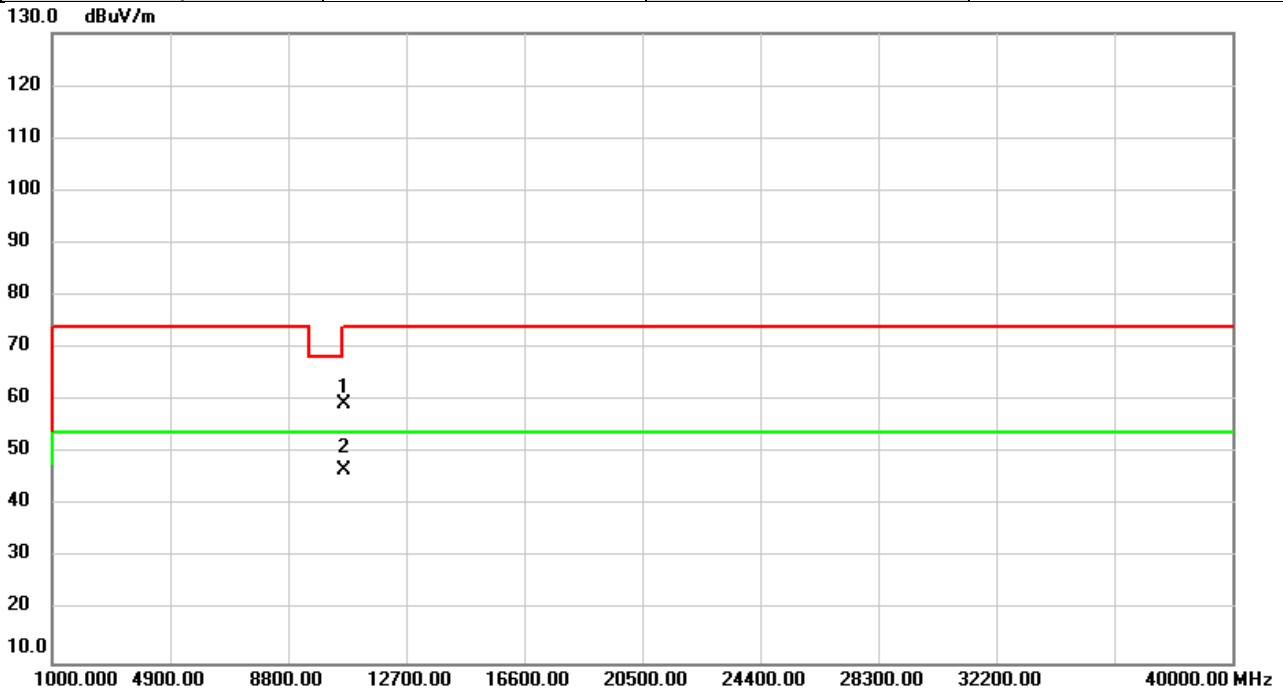


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10620.00	54.00	5.37	59.37	74.00	-14.63	peak	
2	*	10620.00	41.47	5.37	46.84	54.00	-7.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/6
Test Frequency	5310	Polarization	Horizontal
Temp	22°C	Hum.	52%

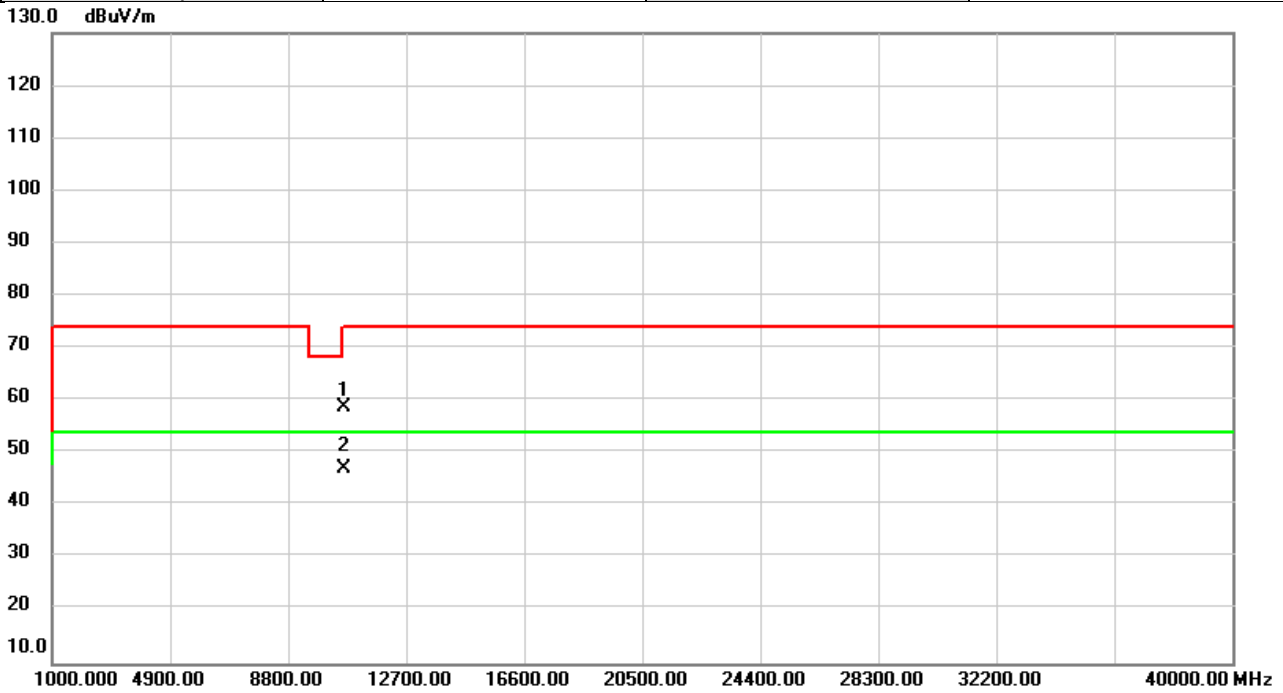


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10620.00	53.40	5.37	58.77	74.00	-15.23	peak	
2	*	10620.00	41.82	5.37	47.19	54.00	-6.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/6
Test Frequency	5510	Polarization	Vertical
Temp	22°C	Hum.	52%

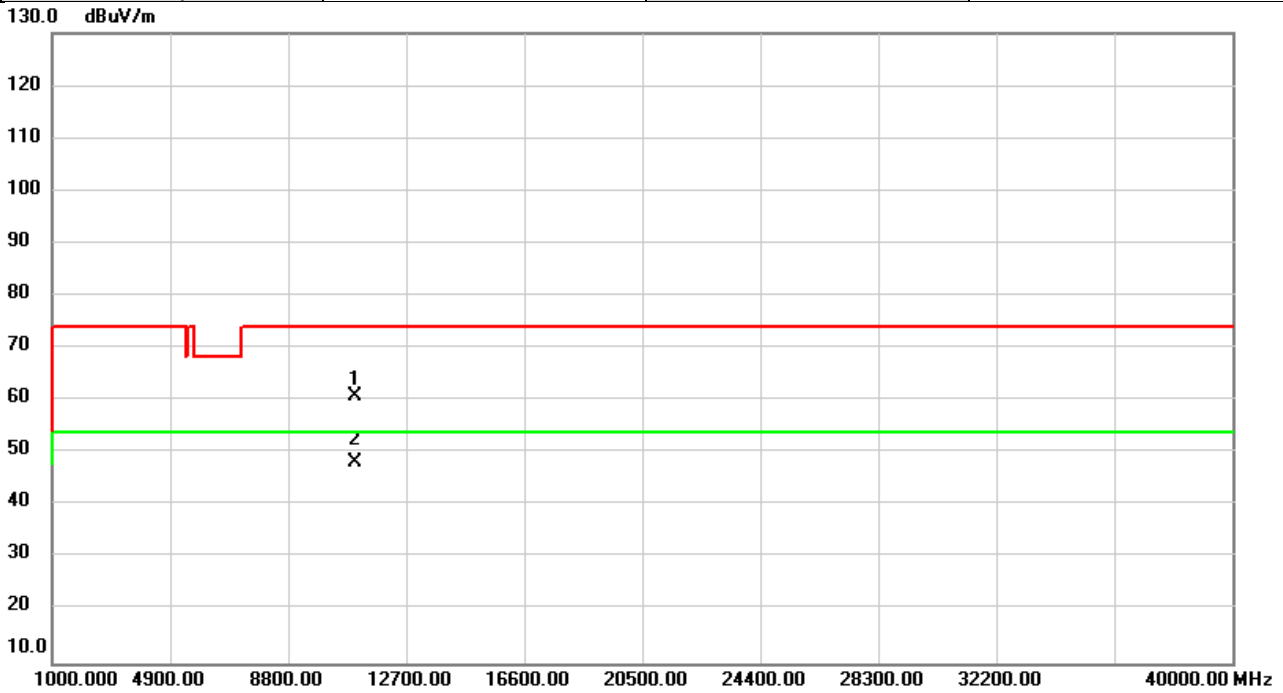


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11020.00	54.25	6.48	60.73	74.00	-13.27	peak	
2	*	11020.00	41.63	6.48	48.11	54.00	-5.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/6
Test Frequency	5510	Polarization	Horizontal
Temp	22°C	Hum.	52%

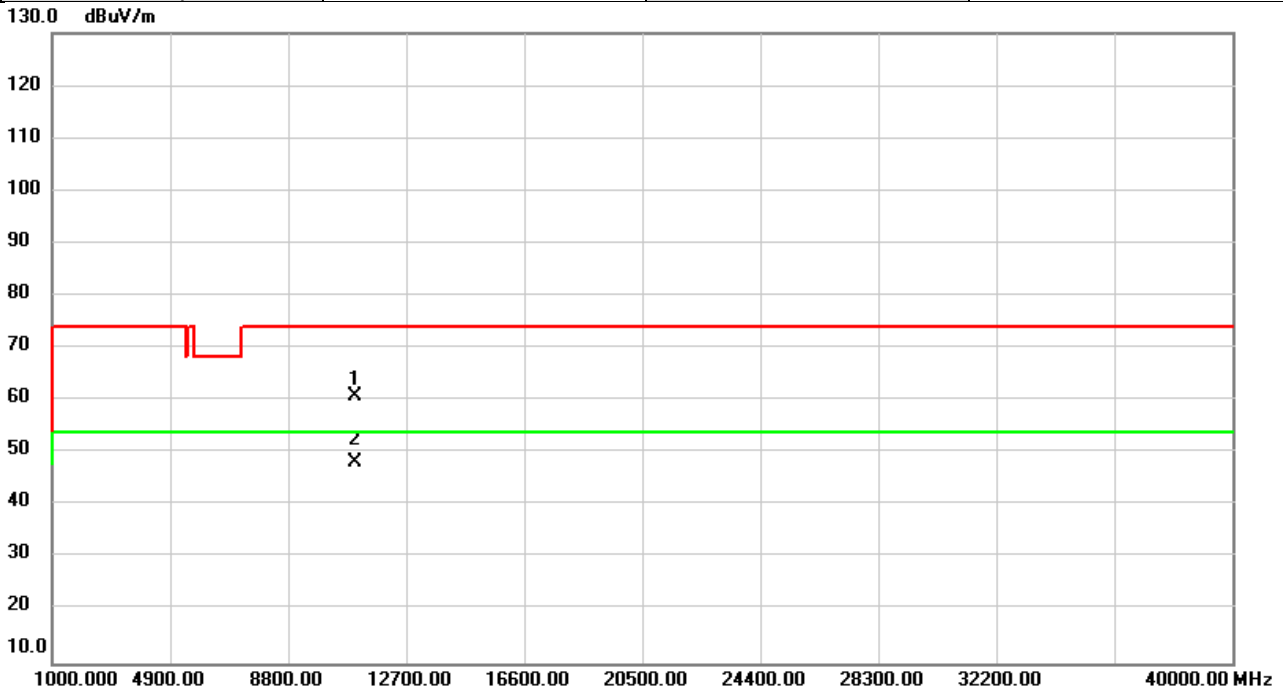


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11020.00	54.47	6.48	60.95	74.00	-13.05	peak	
2	*	11020.00	41.78	6.48	48.26	54.00	-5.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/6
Test Frequency	5550	Polarization	Vertical
Temp	22°C	Hum.	52%

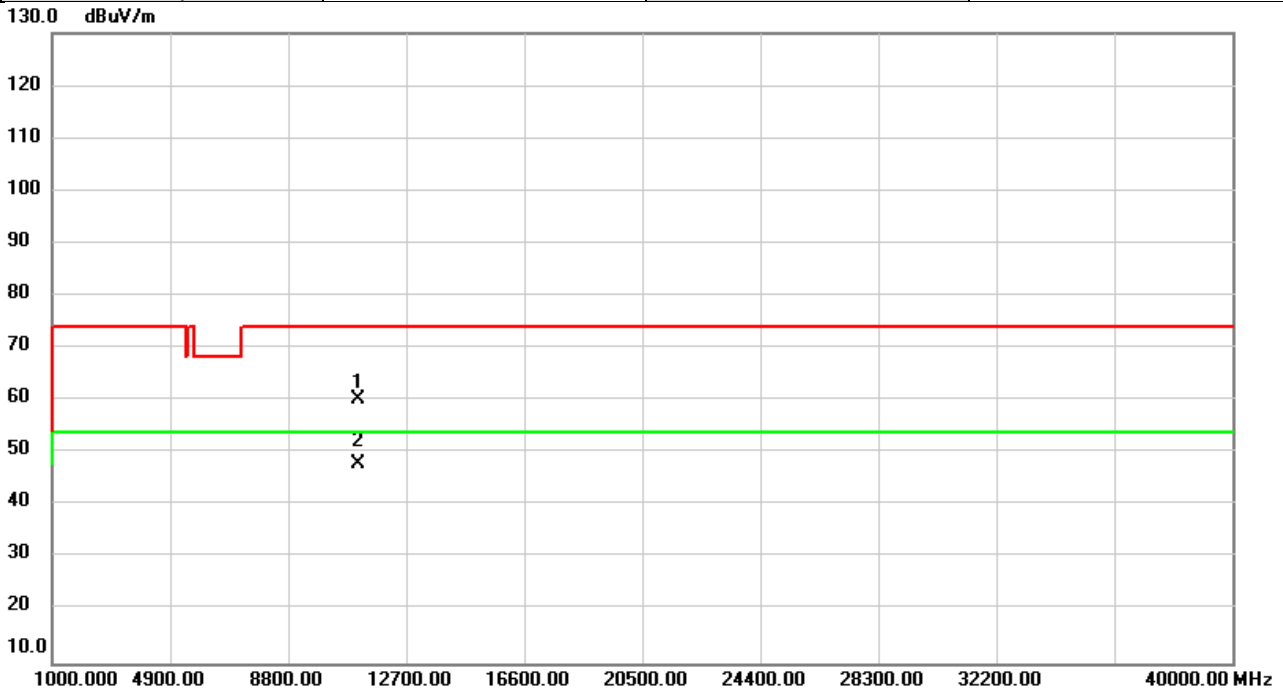


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11100.00	54.00	6.24	60.24	74.00	-13.76	peak	
2	*	11100.00	41.64	6.24	47.88	54.00	-6.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/6
Test Frequency	5550	Polarization	Horizontal
Temp	22°C	Hum.	52%

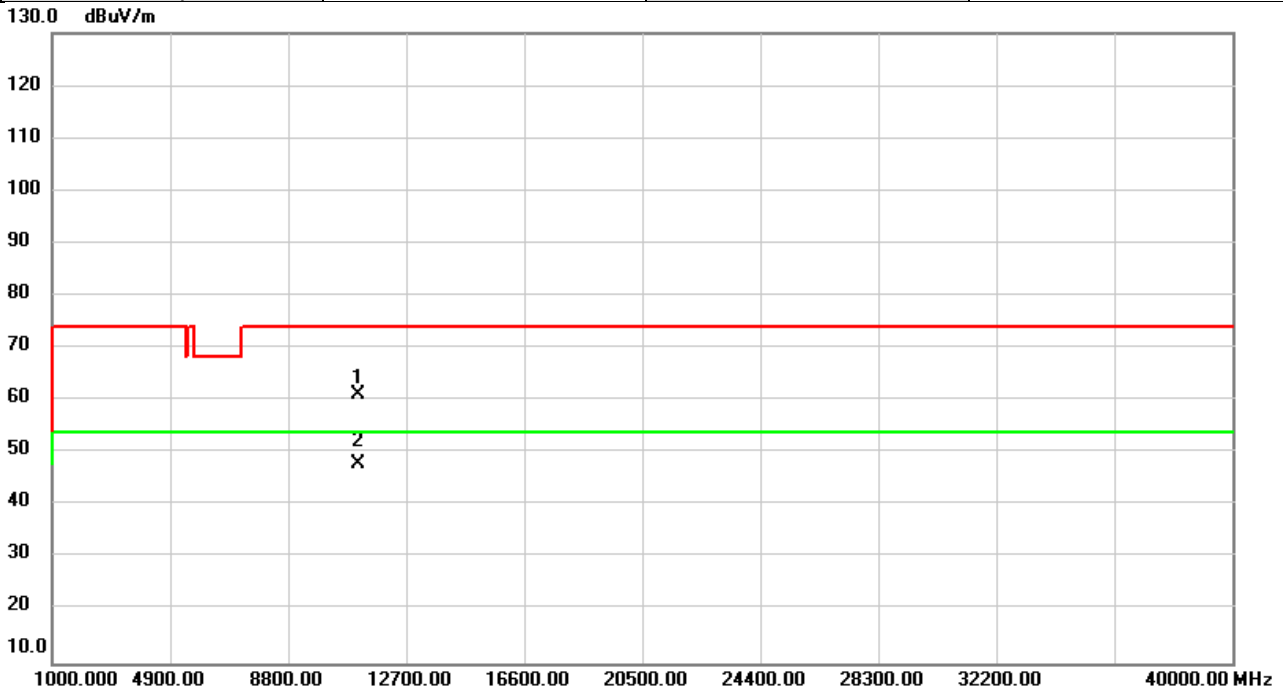


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11100.00	54.87	6.24	61.11	74.00	-12.89	peak	
2	*	11100.00	41.78	6.24	48.02	54.00	-5.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/6
Test Frequency	5670	Polarization	Vertical
Temp	22°C	Hum.	52%

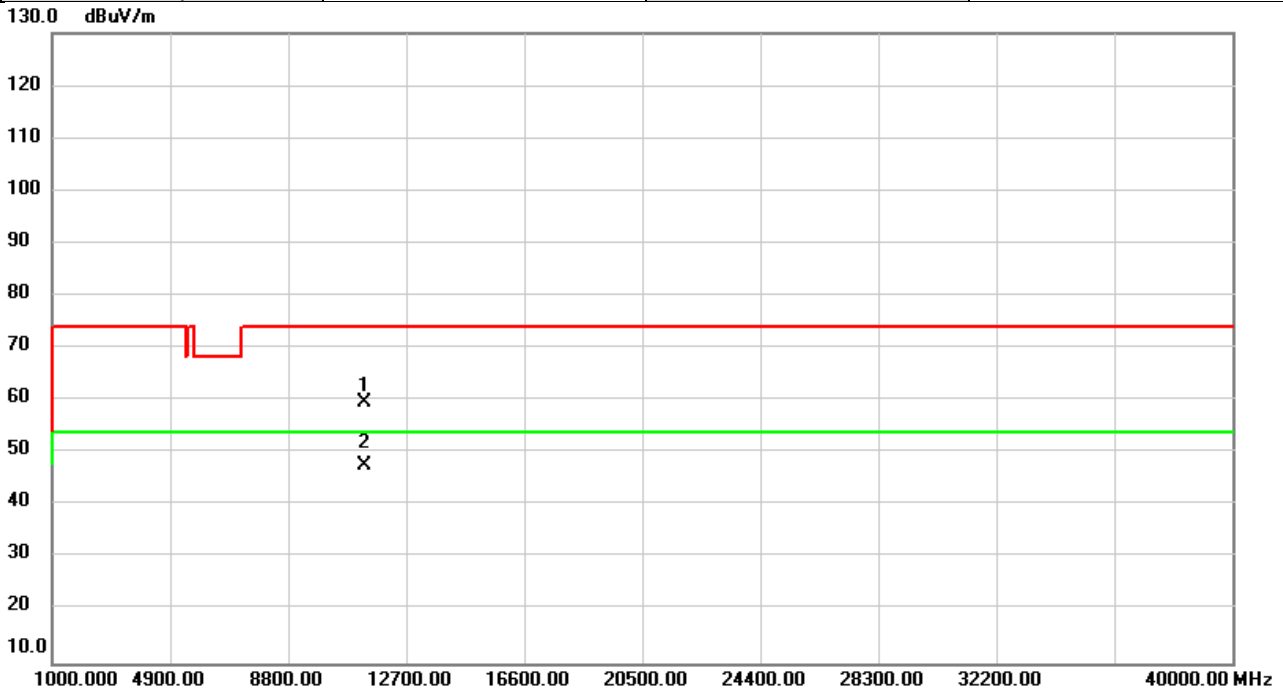


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11340.00	54.08	5.52	59.60	74.00	-14.40	peak	
2	*	11340.00	42.12	5.52	47.64	54.00	-6.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/6
Test Frequency	5670	Polarization	Horizontal
Temp	22°C	Hum.	52%

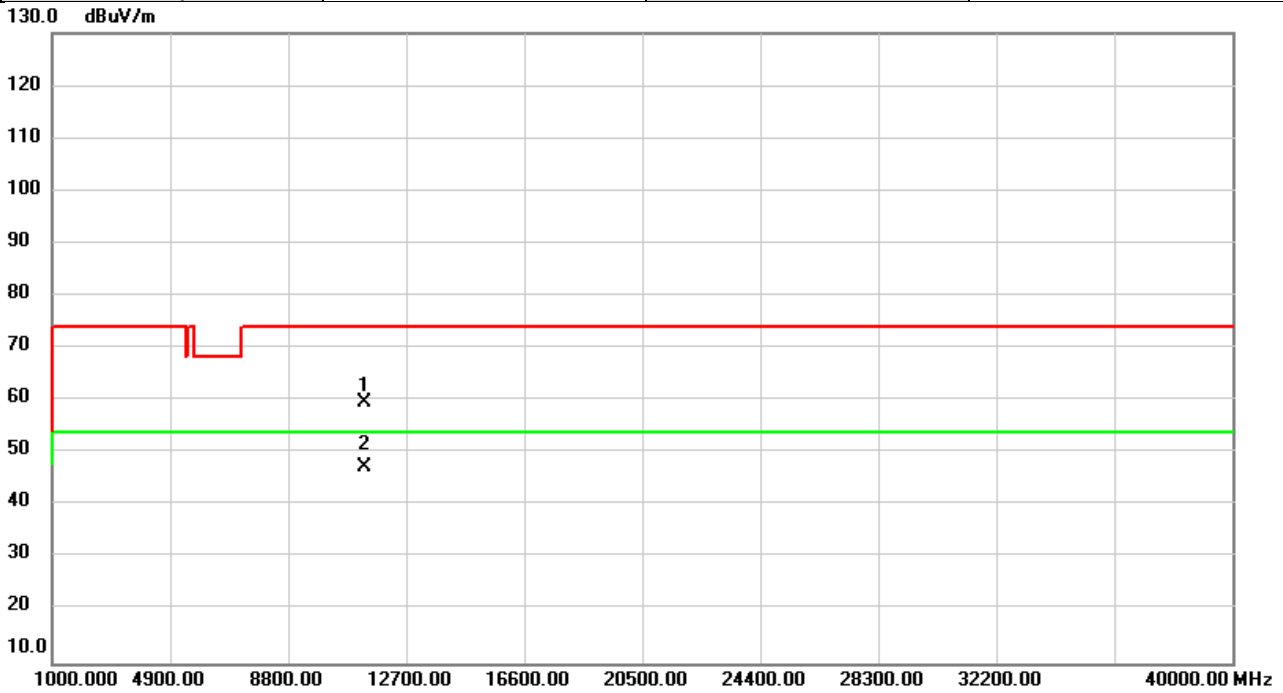


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11340.00	54.07	5.52	59.59	74.00	-14.41	peak	
2	*	11340.00	41.79	5.52	47.31	54.00	-6.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/6
Test Frequency	5755	Polarization	Vertical
Temp	22°C	Hum.	52%

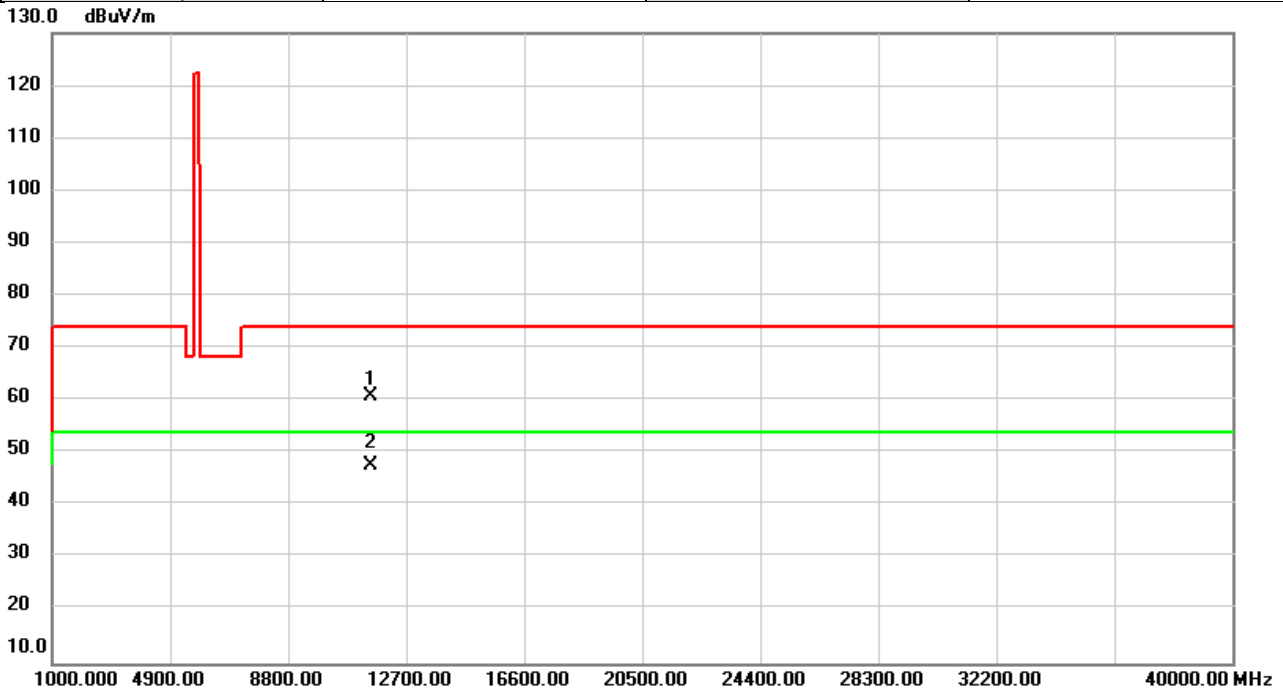


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11510.00	55.77	5.01	60.78	74.00	-13.22	peak	
2	*	11510.00	42.60	5.01	47.61	54.00	-6.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/6
Test Frequency	5755	Polarization	Horizontal
Temp	22°C	Hum.	52%

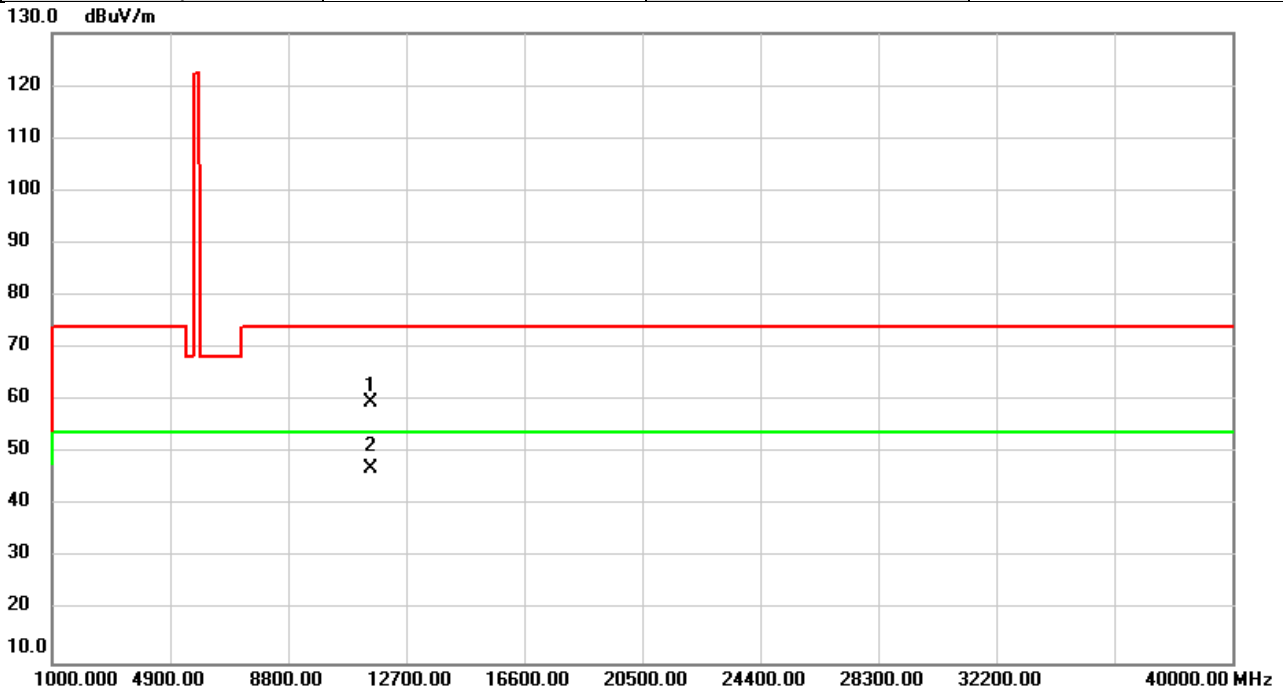


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11510.00	54.54	5.01	59.55	74.00	-14.45	peak	
2	*	11510.00	42.04	5.01	47.05	54.00	-6.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/6
Test Frequency	5795	Polarization	Vertical
Temp	22°C	Hum.	52%

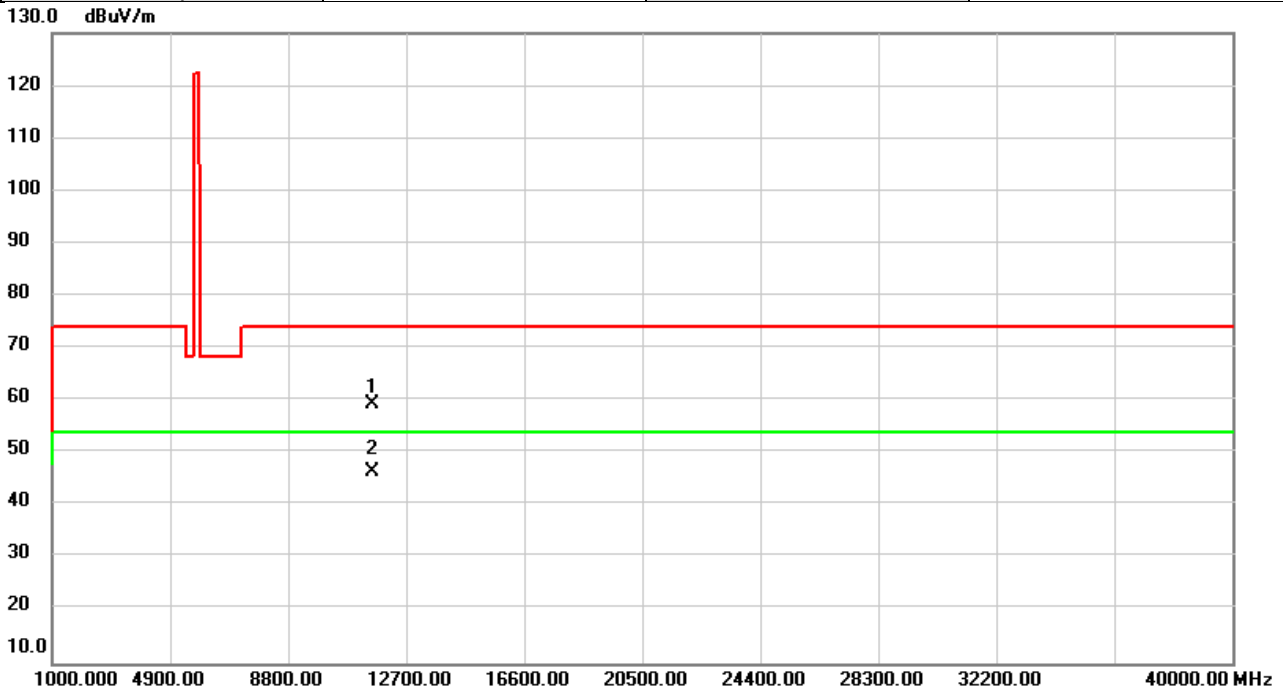


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11590.00	54.57	4.83	59.40	74.00	-14.60	peak	
2	*	11590.00	41.65	4.83	46.48	54.00	-7.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW40)	Test Date	2020/7/6
Test Frequency	5795	Polarization	Horizontal
Temp	22°C	Hum.	52%

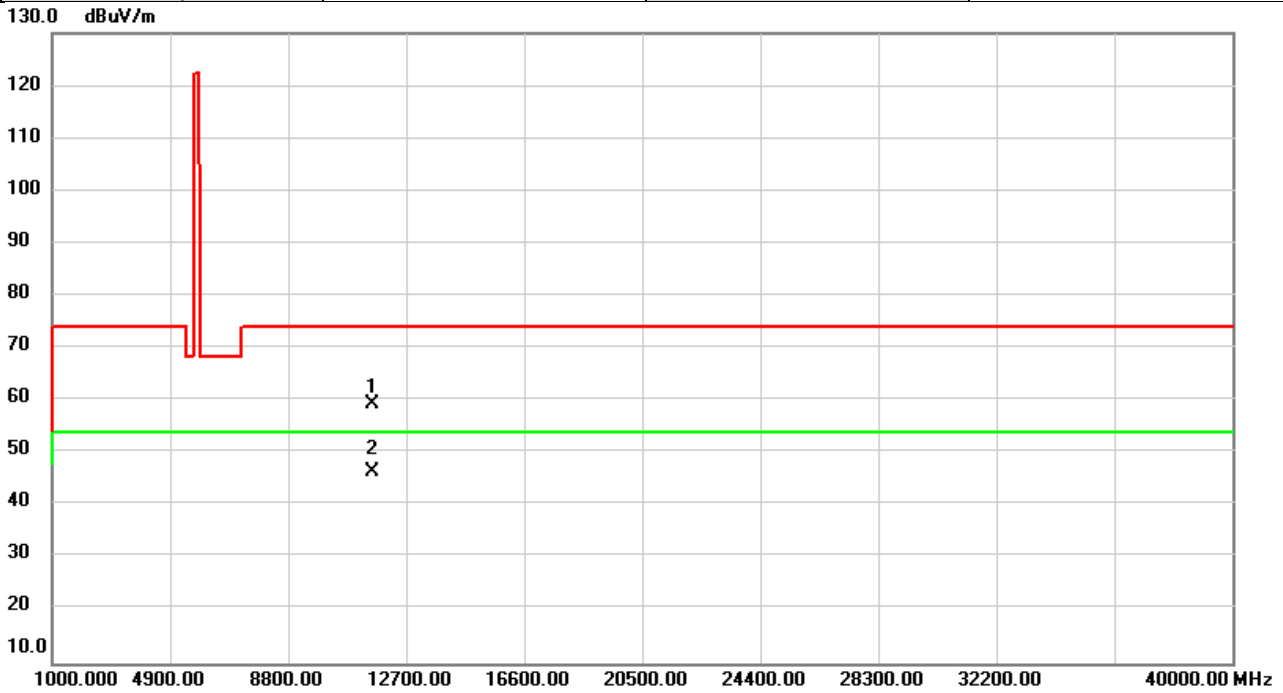


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11590.00	54.49	4.83	59.32	74.00	-14.68	peak	
2	*	11590.00	41.75	4.83	46.58	54.00	-7.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/7/6
Test Frequency	5210	Polarization	Vertical
Temp	22°C	Hum.	52%

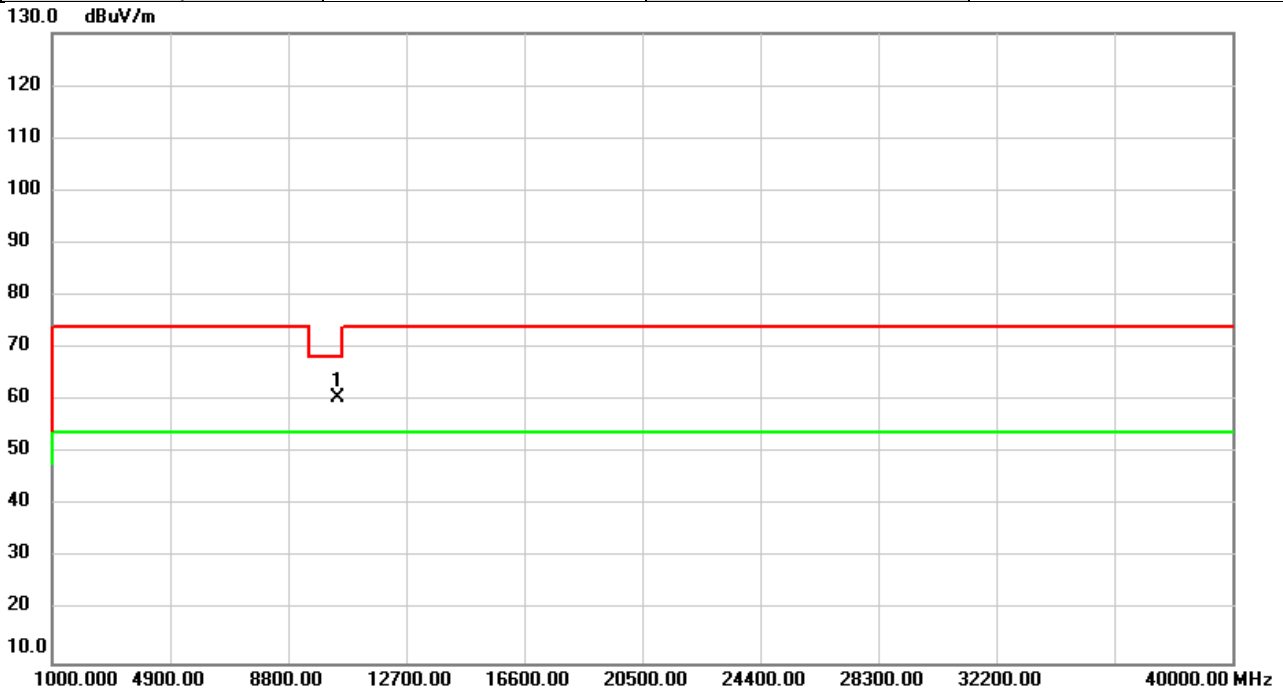


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	55.72	4.84	60.56	68.20	-7.64	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/7/6
Test Frequency	5210	Polarization	Horizontal
Temp	22°C	Hum.	52%

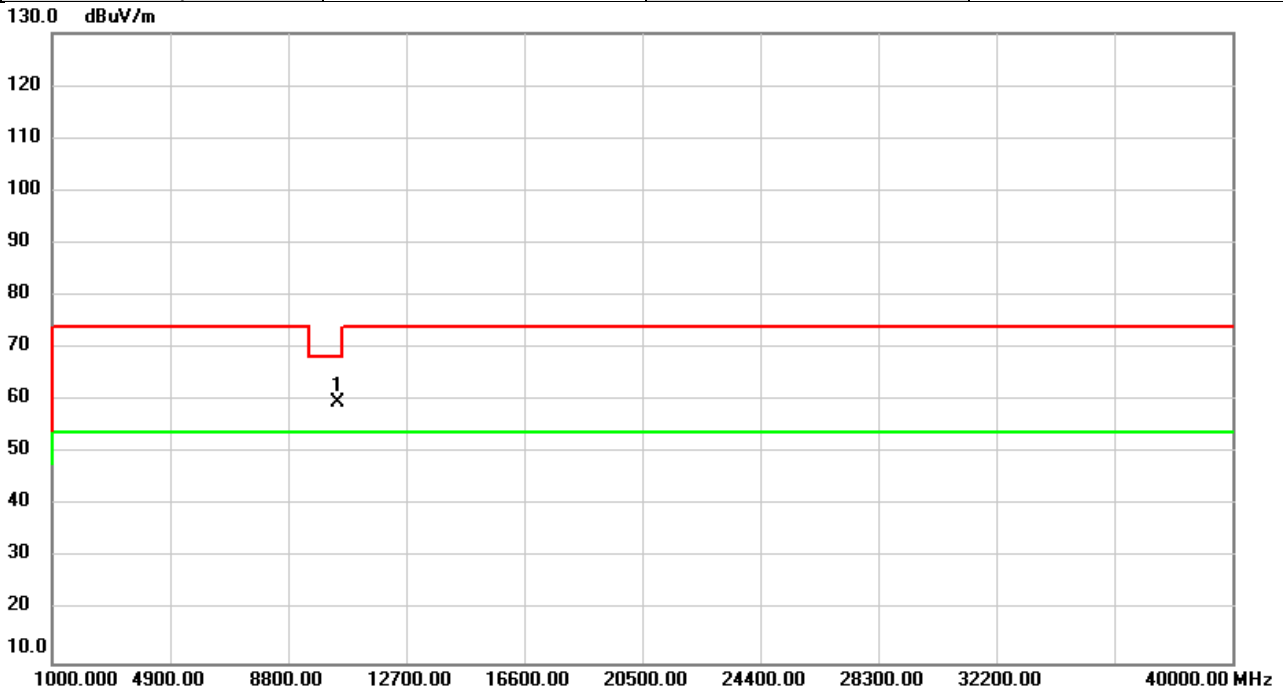


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	54.91	4.84	59.75	68.20	-8.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/7/6
Test Frequency	5290	Polarization	Vertical
Temp	22°C	Hum.	52%

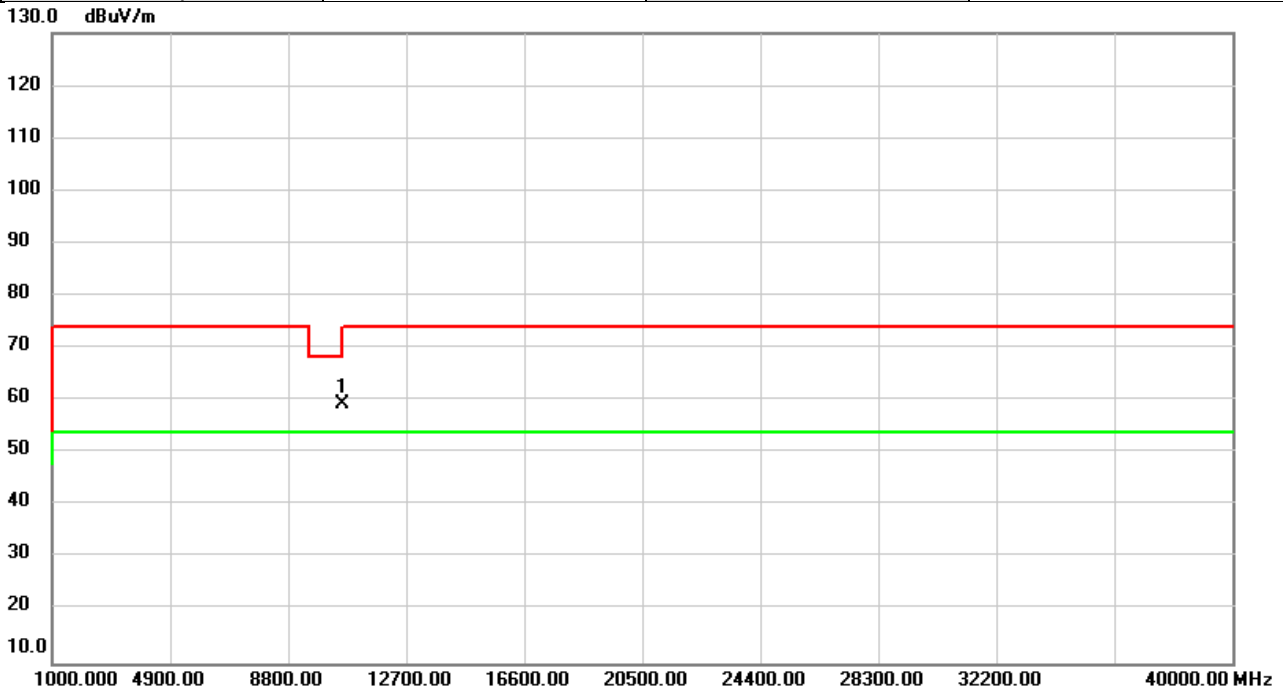


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.35	54.12	5.26	59.38	68.20	-8.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HEW80)	Test Date	2020/7/6
Test Frequency	5290	Polarization	Horizontal
Temp	22°C	Hum.	52%

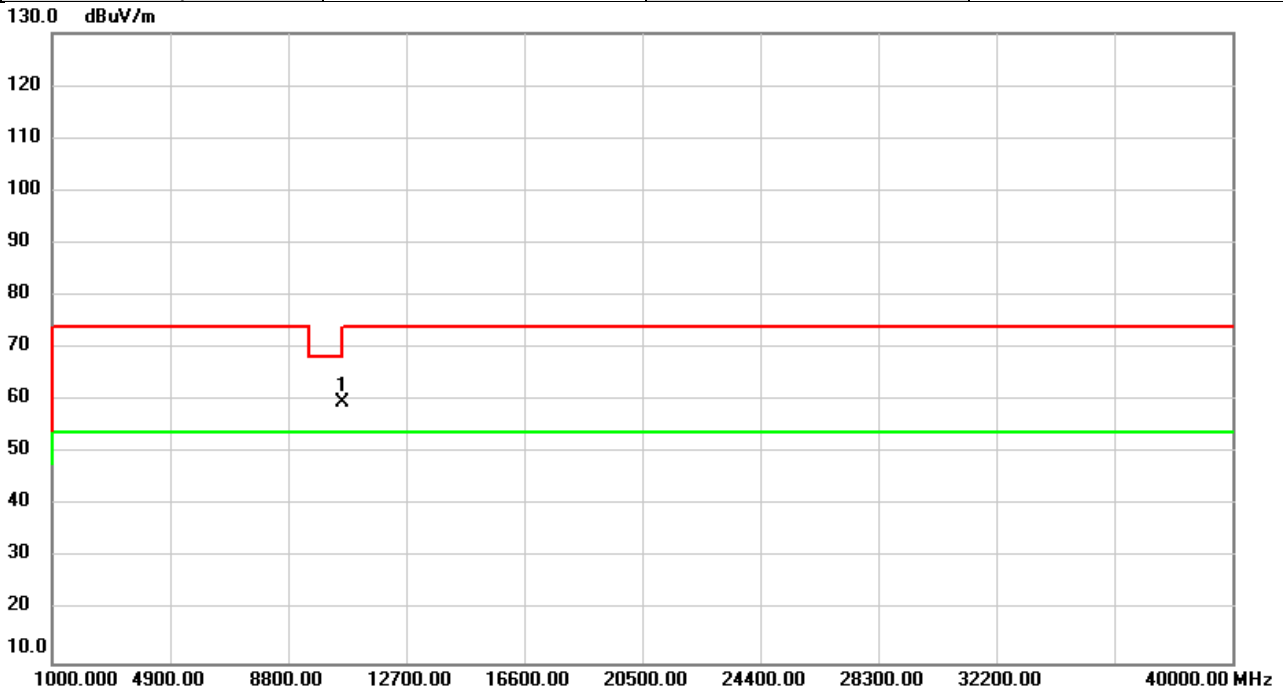

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	54.53	5.25	59.78	68.20	-8.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.