

## Supplemental “Transmit Simultaneously” Test Report

**Report No.:** RF200203E11-2

**FCC ID:** 2AF5PML2410

**Test Model:** ML2410

**Series Model:** ML2410XY

( where both X and Y can be A, B, C, D or blank. )

**Received Date:** Feb. 03, 2020

**Test Date:** Mar. 03 to 04, 2020

**Issued Date:** Apr. 01, 2020

**Applicant:** MTRLC LLC

**Address:** 225 Franklin Street, 26th Floor, Boston, MA 02110 USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwa.

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan.

**FCC Registration /  
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate of Conformity .....</b>	<b>4</b>
<b>2 Summary of Test Results .....</b>	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Modification Record .....	5
<b>3 General Information .....</b>	<b>6</b>
3.1 General Description of EUT .....	6
3.1.1 Test Mode Applicability and Tested Channel Detail .....	9
3.2 Description of Support Units .....	11
3.2.1 Configuration of System under Test .....	12
<b>4 Test Types and Results .....</b>	<b>13</b>
4.1 Radiated Emission and Bandedge Measurement .....	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	13
4.1.2 Test Instruments .....	15
4.1.3 Test Procedures .....	16
4.1.4 Deviation from Test Standard .....	16
4.1.5 Test Setup .....	17
4.1.6 EUT Operating Conditions .....	18
4.1.7 Test Results .....	19
4.2 Conducted Emission Measurement .....	24
4.2.1 Limits of Conducted Emission Measurement .....	24
4.2.2 Test Instruments .....	24
4.2.3 Test Procedures .....	25
4.2.4 Deviation from Test Standard .....	25
4.2.5 Test Setup .....	25
4.2.6 EUT Operating Conditions .....	25
4.2.7 Test Results .....	26
4.3 Conducted Out of Band Emission Measurement .....	28
4.3.1 Limits of Conducted Out of Band Emission Measurement .....	28
4.3.2 Test Setup .....	28
4.3.3 Test Instruments .....	28
4.3.4 Test Procedures .....	28
4.3.5 Deviation from Test Standard .....	28
4.3.6 EUT Operating Conditions .....	28
4.3.7 Test Results .....	28
<b>5 Pictures of Test Arrangements .....</b>	<b>30</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>31</b>

### Release Control Record

Issue No.	Description	Date Issued
RF200203E11-2	Original release.	Apr. 01, 2020

## 1 Certificate of Conformity

**Product:** AC1900 LTE Router  
**Brand:** Motorola  
**Test Model:** ML2410  
**Series Model:** ML2410XY  
(where both X and Y can be A, B, C, D or blank. )  
**Sample Status:** ENGINEERING SAMPLE  
**Applicant:** MTRLC LLC  
**Test Date:** Mar. 03 to 04, 2020  
**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
47 CFR FCC Part 15, Subpart E (Section 15.407)  
FCC Part 27, Subpart H  
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Joyce Kuo , **Date:** Apr. 01, 2020  
Joyce Kuo / Specialist

**Approved by :** Clark Lin , **Date:** Apr. 01, 2020  
Clark Lin / Technical Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C, E (SECTION 15.247, 15.407)			
FCC Part 27			
FCC Clause	Test Item	Result	Remarks
15.207 15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -4.86dB at 20.24219MHz.
15.205 / 15.209 / 15.247(d) 15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -3.3dB at 48.58MHz.
2.1053 27.53	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -41.85dB at 3498.5MHz.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.8 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.0 dB
	30MHz ~ 1GHz	5.1 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.1 dB
	6GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.2 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	AC1900 LTE Router
Brand	Motorola
Test Model	ML2410
Series Model	ML2410XY (where both X and Y can be A, B, C, D or blank. )
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from power adapter or 7.2Vdc from battery
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT20/40 in 2.4GHz
Modulation Technology	DSSS,OFDM
Operating Frequency	<b>2.4GHz:</b> 2.412 ~ 2.462GHz <b>5GHz:</b> 5.18 ~ 5.24GHz, 5.26 ~ 5.32 GHz, 5.50 ~ 5.72 GHz, 5.745 ~ 5.825GHz
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1, Battery x1
Data Cable Supplied	Ethernet cable x1 (Unshielded, 1.5m)

Note:

- The EUT contains certified WWAN module which FCC ID: XMR201808EC25AF (Brand: Quectel; Model: EC25-AF)
- The EUT has below model names, which are identical to each other in all aspects except for the following table:

3. Brand	Model No.	Description
Motorola	ML2410	For marketing purposes of identical hardware.
	ML2410XY (where both X and Y can be A, B, C, D or blank)	

From the above models, model: **ML2410** was selected as representative model for the test and its data was recorded in this report.

- The EUT has below radios as following table:

Radio 1	Radio 2	Radio 3
WLAN (2.4GHz)	WLAN (5GHz)	WWAN

- Simultaneously transmission condition.

Condition	Technology
1	WWAN + WLAN (2.4GHz) + WLAN (5GHz)
2	WWAN + WLAN (2.4GHz)
3	WWAN + WLAN (5GHz)
4	WLAN (2.4GHz) + WLAN (5GHz)

6. The EUT must be supplied with a power and the following different models could be chosen:

Adapter			
No	Brand	Model No.	Spec.
1	T&W ELECTRONICS	S36B52-120A300-04	Input: 100-240V, 1A, 50-60Hz Output: 12V, 3A DC output cable (Unshielded, 1.5 m)
2	HON-KWANG ELECTRIC CO., LTD.	HK-BE-120A300-US (HKSC-190178)	Input: 100-240V, 1A, 50-60Hz Output: 12V, 3A DC output cable (Unshielded, 1.5 m)
3	HON-KWANG ELECTRIC CO., LTD.	HK-BE-120A300-US (HKSC-190147)	Input: 100-240V, 1A, 50-60Hz Output: 12V, 3A DC output cable (Unshielded, 1.5 m)

Battery			
No	Brand	Model No.	Spec.
1	Getac Technolog(Kunshan) Co.,LTD	BP-15033-22/2150 S	7.2V 4.3Ah 30.96Wh

Note:

- The adapter 3 is as same as adapter 2; except for DC plug is different.
- From the above adapters, the AC Power Conducted Emissions test worst case was found in **Adapter No.: 1**. Therefore only the test data of the mode was recorded in this report.
- From the above adapters and battery, the Radiated Emissions test worst case was found in **Adapter No.: 1**. Therefore only the test data of the mode was recorded in this report.

7. The antennas provided to the EUT, please refer to the following table:

WLAN Antenna							
Ant. No.	RF Chain No.	Brand	Ant. Net Gain	Frequency Range (GHz)	Antenna Type	Connector Type	Cable Length (mm)
1	WiFi Chain0	Airgain	4.3 dBi, 4.3 dBi, 5.5 dBi	2.4 to 2.49, 5.15 to 5.35, 5.47 to 5.85	PCB	i-pex(MHF)	140
2	WiFi Chain1	Airgain	3.2 dBi, 4.4 dBi, 4.1 dBi	2.4 to 2.49, 5.15 to 5.35, 5.47 to 5.85	PCB	i-pex(MHF)	170
3	WiFi Chain2	Airgain	4.6 dBi, 4.9 dBi, 5.4 dBi	2.4 to 2.49, 5.15 to 5.35, 5.47 to 5.85	PCB	i-pex(MHF)	100
WWAN Antenna							
Ant. No.	RF Chain No.	Brand	Ant. Net Gain	Frequency Range (MHz)	Antenna Type	Connector Type	Cable Length (mm)
1	LTE MAIN	Cortec	1.08 dBi 3.19 dBi	617 ~ 894 1710 ~ 2200	Dipole	SMA	280
2	LTE AUX	Cortec	1.08 dBi 3.19 dBi	617 ~ 894 1710 ~ 2200	Dipole	SMA	200

8. The EUT incorporates a MIMO function.

<b>2.4GHz Band</b>		
<b>MODULATION MODE</b>	<b>TX &amp; RX CONFIGURATION</b>	
<b>802.11b</b>	3TX	3RX
<b>802.11g</b>	3TX	3RX
<b>802.11n (HT20)</b>	3TX	3RX
<b>802.11n (HT40)</b>	3TX	3RX
<b>VHT20</b>	3TX	3RX
<b>VHT40</b>	3TX	3RX
<b>5GHz Band</b>		
<b>MODULATION MODE</b>	<b>TX &amp; RX CONFIGURATION</b>	
<b>802.11a</b>	3TX	3RX
<b>802.11n (HT20)</b>	3TX	3RX
<b>802.11n (HT40)</b>	3TX	3RX
<b>802.11ac (VHT20)</b>	3TX	3RX
<b>802.11ac (VHT40)</b>	3TX	3RX
<b>802.11ac (VHT80)</b>	3TX	3RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The EUT support Beamforming and non-beamforming mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.

9. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.



### 3.1.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE $\geq$ 1G	RE<1G	PLC	OB	
-	√	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz      **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission      **OB**: Conducted Out-Band Emission Measurement

#### Radiated Emission Test (Above 1GHz):

- The tested configurations represent the worst-case mode from all possible combinations by the maximum power.  
 Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
11b + 802.11a + LTE Band 12	1 to 11	6	DSSS	DBPSK
	36 to 64, 100 to 144, 149 to 165	165	OFDM	BPSK
	23017 to 23173	23017	OFDMA	-

#### Radiated Emission Test (Below 1GHz):

- The tested configurations represent the worst-case mode from all possible combinations by the maximum power.  
 Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
11b + 802.11a + LTE Band 12	1 to 11	6	DSSS	DBPSK
	36 to 64, 100 to 144, 149 to 165	165	OFDM	BPSK
	23017 to 23173	23017	OFDMA	-

#### Power Line Conducted Emission Test:

- The tested configurations represent the worst-case mode from all possible combinations by the maximum power.  
 Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
11b + 802.11a + LTE Band 12	1 to 11	6	DSSS	DBPSK
	36 to 64, 100 to 144, 149 to 165	165	OFDM	BPSK
	23017 to 23173	23017	OFDMA	-

**Conducted Out-Band Emission Measurement:**

- The tested configurations represent the worst-case mode from all possible combinations by the maximum power.
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
11b + 802.11a	1 to 11	6	DSSS	DBPSK
	36 to 64, 100 to 144, 149 to 165	165	OFDM	BPSK

**Test Condition:**

Applicable To	Environmental Conditions	Input Power	Tested By
RE $\geq$ 1G	23deg. C, 67%RH	120Vac, 60Hz	Ryan Du
RE<1G	23deg. C, 63%RH	120Vac, 60Hz	Kevin Ko
PLC	25deg. C, 75%RH	120Vac, 60Hz	Kevin Ko
OB	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

### 3.2 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
B.	Laptop	SONY	SVS151A12P	275548477001150	NA	Provided by Lab
C.	Laptop	DELL	E5430	4N1SKV1	FCC DoC	Provided by Lab
D.	USB Dongle	Sandisk	128G	NA	NA	Provided by Lab
E.	SIM Card	Anritsu	NA	NA	NA	Provided by Lab
F.	Simulator	Anritsu	MT8820C	6201127458	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.5	No	0	Supplied by client
2.	RJ-45 Cable	1	1.5	No	0	Supplied by client
3.	RJ-45 Cable	1	10	No	0	Provided by Lab
4.	RJ-45 Cable	1	10	No	0	Provided by Lab
5.	RJ-45 Cable	1	10	No	0	Provided by Lab

### 3.2.1 Configuration of System under Test

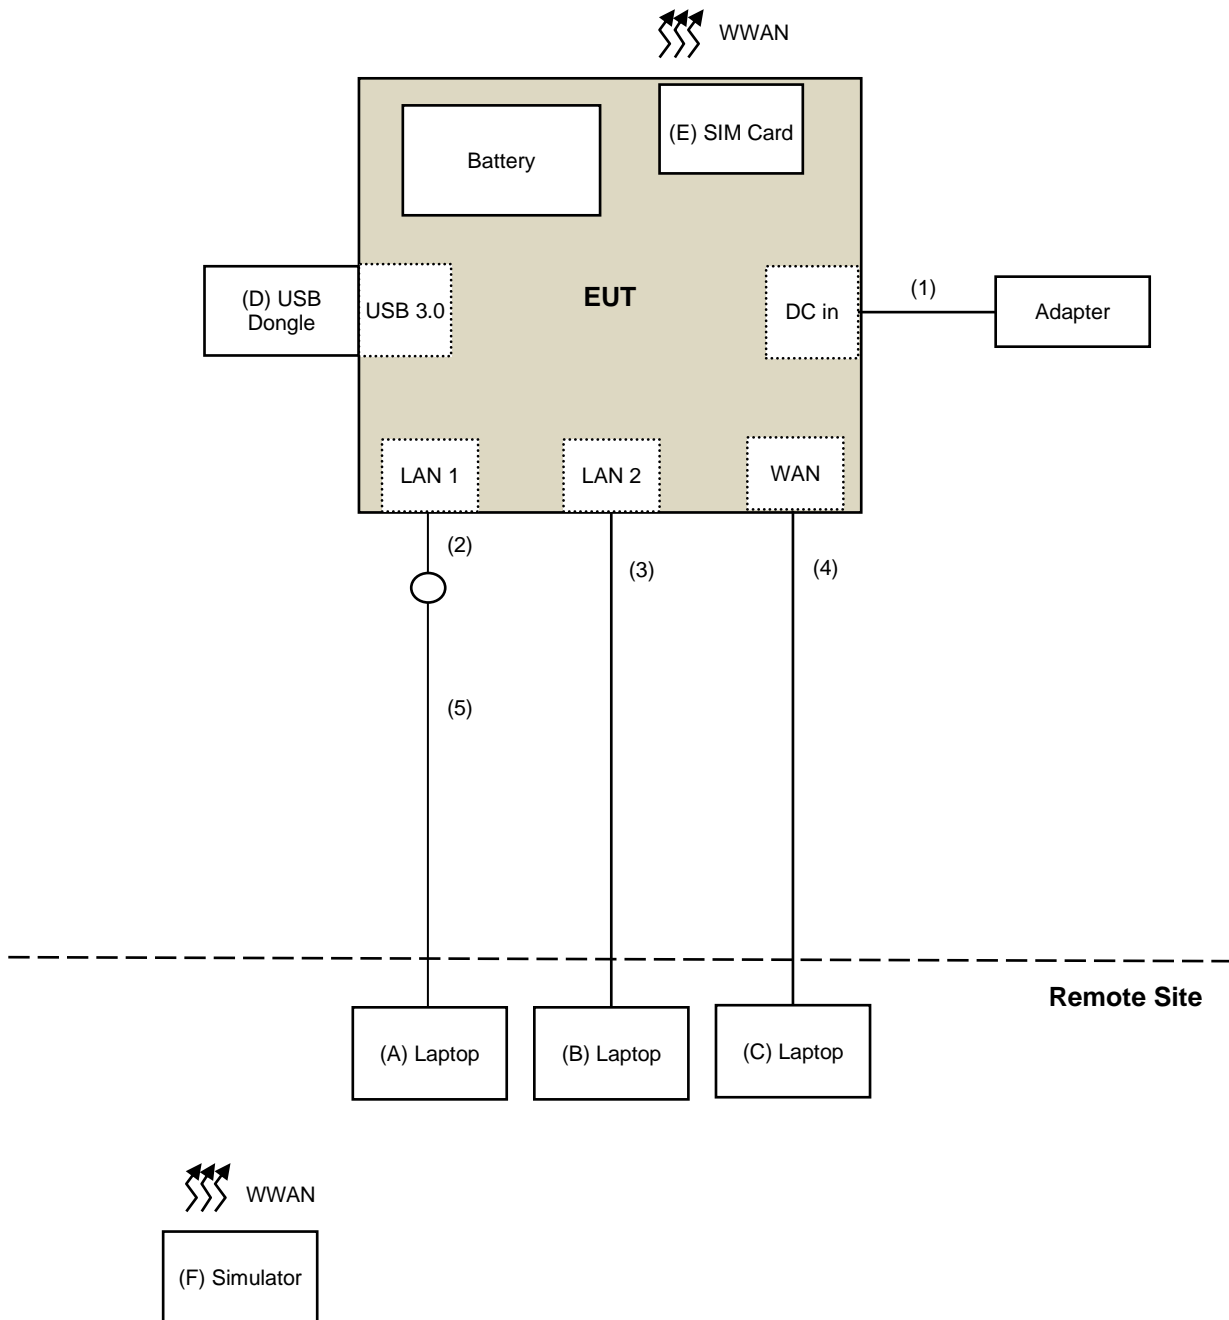

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

For 47 CFR FCC Part 15:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Note:**

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK:74 (dBμV/m)	AV:54 (dBμV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	<input checked="" type="checkbox"/> 15.407(b)(4)(i)	PK:-27 (dBm/MHz) <sup>*1</sup> PK:10 (dBm/MHz) <sup>*2</sup> PK:15.6 (dBm/MHz) <sup>*3</sup> PK:27 (dBm/MHz) <sup>*4</sup>	PK: 68.2(dBμV/m) <sup>*1</sup> PK:105.2 (dBμV/m) <sup>*2</sup> PK: 110.8(dBμV/m) <sup>*3</sup> PK:122.2 (dBμV/m) <sup>*4</sup>
	<input type="checkbox"/> 15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
<sup>*1</sup> beyond 75 MHz or more above of the band edge.		<sup>*2</sup> below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
<sup>*3</sup> below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		<sup>*4</sup> from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

**Note:**

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

For FCC Part 27:

According to FCC 27.53(g) for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model no.	Serial No.	Calibrated DATE	Calibrated Until
Test Receiver Keysight	N9038A	MY54450088	July 03, 2019	July 02, 2020
Pre-Amplifier EMCI	EMC001340	980142	May 30, 2019	May 29, 2020
Loop Antenna Electro-Metrics	EM-6879	269	Sep. 16, 2019	Sep. 15, 2020
RF Cable	NA	LOOPCAB-001	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-002	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	Apr. 30, 2019	Apr. 29, 2020
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Nov. 11, 2019	Nov. 10, 2020
RF Cable	8D	966-3-1	Mar. 18, 2019	Mar. 17, 2020
RF Cable	8D	966-3-2	Mar. 18, 2019	Mar. 17, 2020
RF Cable	8D	966-3-3	Mar. 18, 2019	Mar. 17, 2020
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Sep. 26, 2019	Sep. 25, 2020
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-1200	160922	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-2000	180601	June 10, 2019	June 09, 2020
RF Cable	EMC104-SM-SM-6000	180602	June 10, 2019	June 09, 2020
Spectrum Analyzer Keysight	N9030A	MY54490679	July 17, 2019	July 16, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC102-KM-KM-4500	181205	Aug. 26, 2019	Aug. 25, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: Mar. 03 to 04, 2020

#### 4.1.3 Test Procedures

##### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.


#### 4.1.4 Deviation from Test Standard

No deviation.




#### 4.1.5 Test Setup


##### For Radiated emission below 30MHz

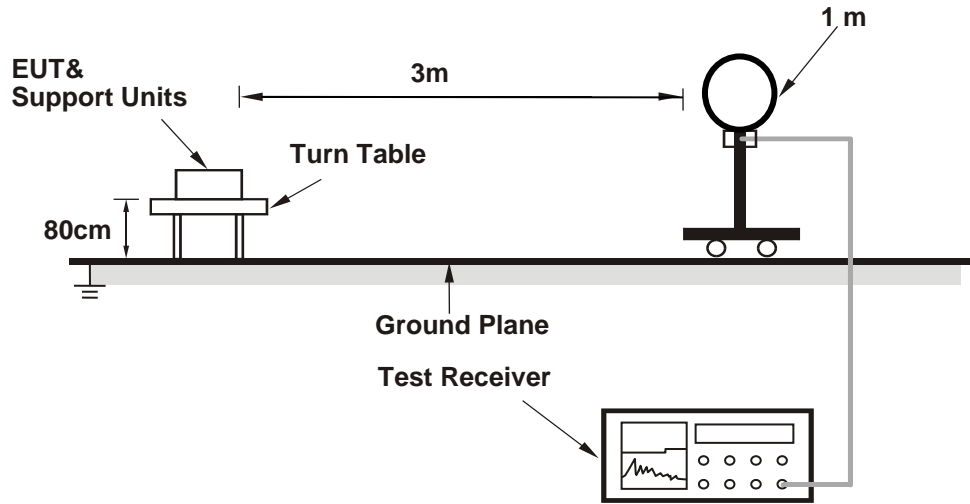

##### For Radiated emission 30MHz to 1GHz

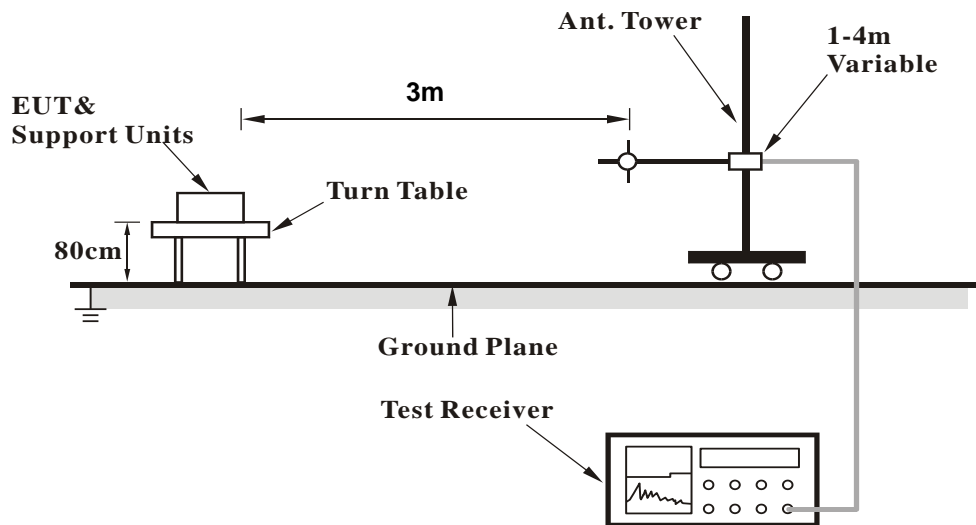

### For Radiated emission above 1GHz

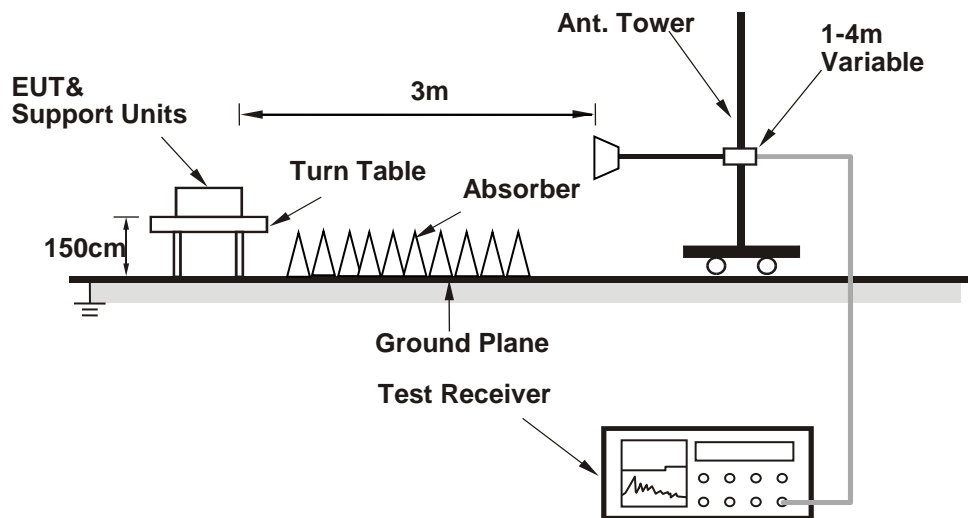

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- a. Connected the EUT with the Laptop is placed on remote site.
- b. Controlling software (WLAN: package\_Ulv2.05\_DLLv4.08\_20190312 / WWAN: EUT link Simulator) has been activated to set the EUT on specific status.

#### 4.1.7 Test Results

##### Above 1GHz Data

<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
------------------------	--------------	--------------------------	---------------------------

##### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	43.9 PK	74.0	-30.1	1.00 H	178	41.8	2.1
2	4874.00	31.6 AV	54.0	-22.4	1.00 H	178	29.5	2.1
3	7311.00	44.5 PK	74.0	-29.5	2.25 H	205	36.4	8.1
4	7311.00	32.9 AV	54.0	-21.1	2.25 H	205	24.8	8.1
5	11650.00	52.2 PK	74.0	-21.8	1.48 H	312	39.8	12.4
6	11650.00	40.1 AV	54.0	-13.9	1.48 H	312	27.7	12.4
7	#17475.00	48.9 PK	68.2	-19.3	1.52 H	177	31.9	17.0

##### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	47.0 PK	74.0	-27.0	3.90 V	106	44.9	2.1
2	4874.00	34.6 AV	54.0	-19.4	3.90 V	106	32.5	2.1
3	7311.00	44.4 PK	74.0	-29.6	2.48 V	283	36.3	8.1
4	7311.00	32.5 AV	54.0	-21.5	2.48 V	283	24.4	8.1
5	11650.00	53.8 PK	74.0	-20.2	3.97 V	280	41.4	12.4
6	11650.00	41.4 AV	54.0	-12.6	3.97 V	280	29.0	12.4
7	#17475.00	45.0 PK	68.2	-23.2	1.48 V	52	28.0	17.0

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.

Mode	TX channel 23071	Frequency Range	Above 1GHz
------	------------------	-----------------	------------

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1399.4	36.79	-95.26	-58.47	-13	-45.47
2	2099.1	36.43	-95.26	-58.83	-13	-45.83
3	2798.8	40.07	-95.26	-55.19	-13	-42.19
<b>4</b>	<b>3498.5</b>	<b>40.41</b>	<b>-95.26</b>	<b>-54.85</b>	<b>-13</b>	<b>-41.85</b>

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	1399.4	34.97	-95.26	-60.29	-13	-47.29
2	2099.1	35.37	-95.26	-59.89	-13	-46.89
3	2798.8	37.63	-95.26	-57.63	-13	-44.63
4	3498.5	38.09	-95.26	-57.17	-13	-44.17

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

### Below 1GHz Data:


<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.05	32.1 QP	40.0	-7.9	1.00 H	47	40.7	-8.6
2	91.86	30.8 QP	43.5	-12.7	2.00 H	58	44.0	-13.2
3	160.42	35.3 QP	43.5	-8.2	1.50 H	69	42.4	-7.1
4	197.16	32.2 QP	43.5	-11.3	1.00 H	71	42.5	-10.3
5	250.02	30.5 QP	46.0	-15.5	1.00 H	360	38.9	-8.4
6	542.50	35.8 QP	46.0	-10.2	1.50 H	276	36.6	-0.8

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

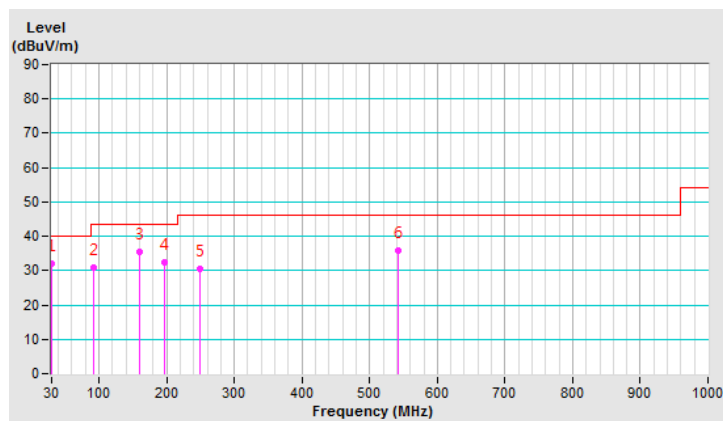


<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	48.58	36.7 QP	40.0	-3.3	1.00 V	360	44.4	-7.7
2	89.73	31.3 QP	43.5	-12.2	2.00 V	360	44.7	-13.4
3	152.49	30.8 QP	43.5	-12.7	1.00 V	128	37.9	-7.1
4	196.06	30.8 QP	43.5	-12.7	1.00 V	360	41.1	-10.3
5	361.72	30.6 QP	46.0	-15.4	1.50 V	19	35.3	-4.7
6	500.01	34.8 QP	46.0	-11.2	1.00 V	74	36.4	-1.6

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

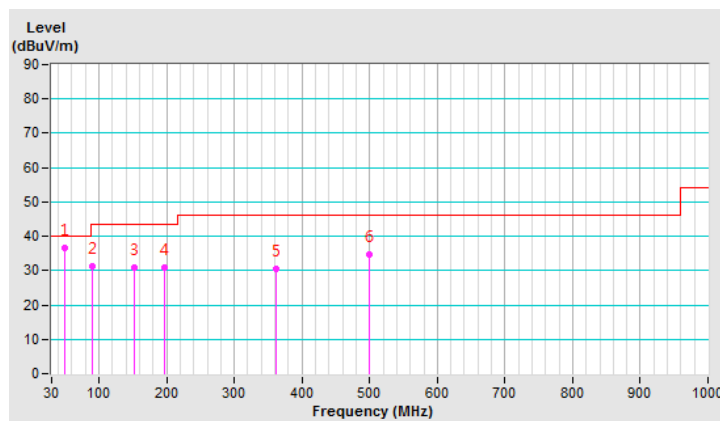

Mode	TX channel 23017	Frequency Range	Above 1GHz
------	------------------	-----------------	------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	62.01	26.92	-95.26	-68.34	-13	-55.34
2	88.9	29.41	-95.26	-65.85	-13	-52.85
3	131.91	25.47	-95.26	-69.79	-13	-56.79
4	235.7	30.65	-95.26	-64.61	-13	-51.61
5	510.39	32.36	-95.26	-62.90	-13	-49.90
6	612.89	35.69	-95.26	-59.57	-13	-46.57

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	83.17	34.31	-95.26	-60.95	-13	-47.95
2	138.2	34.19	-95.26	-61.07	-13	-48.07
3	286.9	31.87	-95.26	-63.39	-13	-50.39
4	344.99	32.35	-95.26	-62.91	-13	-49.91
5	470.51	32.99	-95.26	-62.27	-13	-49.27
6	737.06	40.3	-95.26	-54.96	-13	-41.96

**Remarks:**

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 17, 2019	Mar. 16, 2020
50 ohms Terminator	50	3	Oct. 23, 2019	Oct. 22, 2020
RF Cable	5D-FB	COCCAB-001	Sep. 27, 2019	Sep. 26, 2020
Fixed attenuator EMCI	STI02-2200-10	003	Mar. 14, 2019	Mar. 13, 2020
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: Mar. 03, 2020



#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

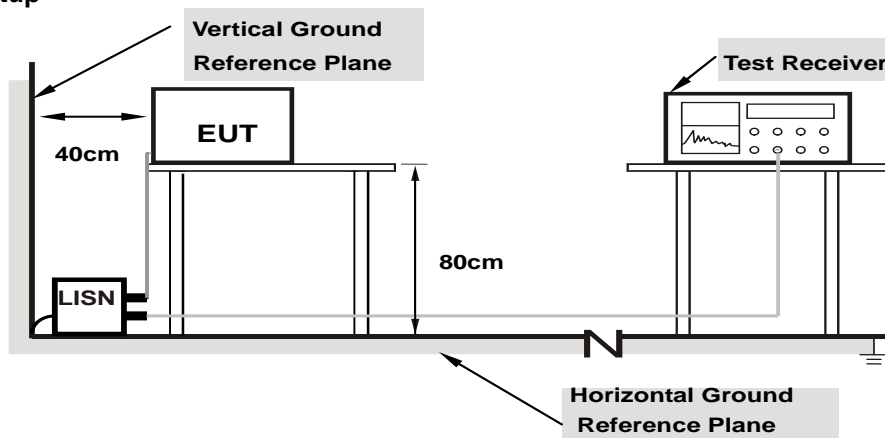

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.


#### 4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	8.19922	10.53	24.16	18.51	34.69	29.04	60.00	50.00	-25.31	-20.96
2	13.19141	10.88	27.56	21.34	38.44	32.22	60.00	50.00	-21.56	-17.78
3	16.02344	11.09	32.35	26.23	43.44	37.32	60.00	50.00	-16.56	-12.68
4	18.21484	11.24	35.54	29.70	46.78	40.94	60.00	50.00	-13.22	-9.06
5	19.98828	11.37	36.92	31.36	48.29	42.73	60.00	50.00	-11.71	-7.27
6	23.60938	11.50	31.61	25.32	43.11	36.82	60.00	50.00	-16.89	-13.18

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

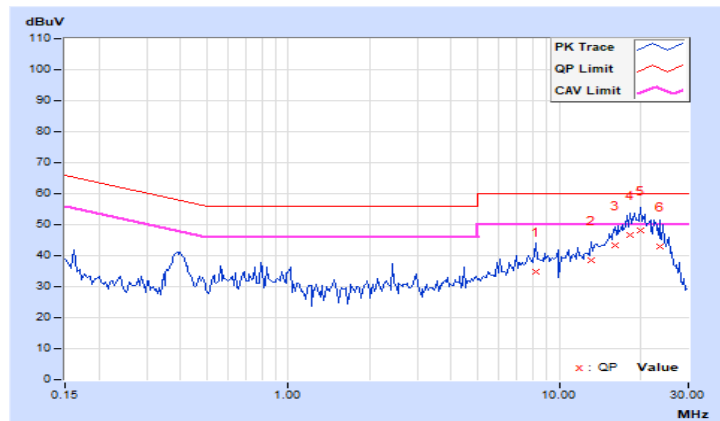


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.40781	10.01	31.29	21.86	41.30	31.87	57.69	47.69	-16.39	-15.82
2	12.39063	10.71	26.14	20.40	36.85	31.11	60.00	50.00	-23.15	-18.89
3	15.51953	10.88	32.69	27.05	43.57	37.93	60.00	50.00	-16.43	-12.07
4	17.31250	10.97	36.64	30.98	47.61	41.95	60.00	50.00	-12.39	-8.05
<b>5</b>	<b>20.24219</b>	<b>11.12</b>	<b>39.18</b>	<b>34.02</b>	<b>50.30</b>	<b>45.14</b>	<b>60.00</b>	<b>50.00</b>	<b>-9.70</b>	<b>-4.86</b>
6	22.74609	11.18	35.33	29.55	46.51	40.73	60.00	50.00	-13.49	-9.27

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

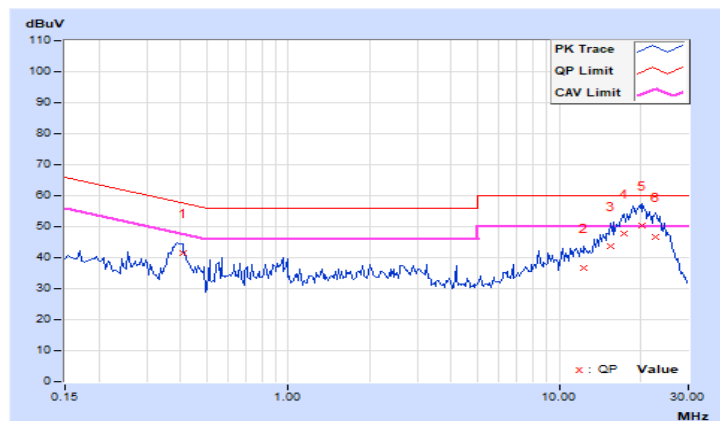


### 4.3 Conducted Out of Band Emission Measurement

#### 4.3.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedures

##### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

##### MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Results


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

2.4GHz\_11b CH6 + 5GHz\_802.11a CH165



Chain 0

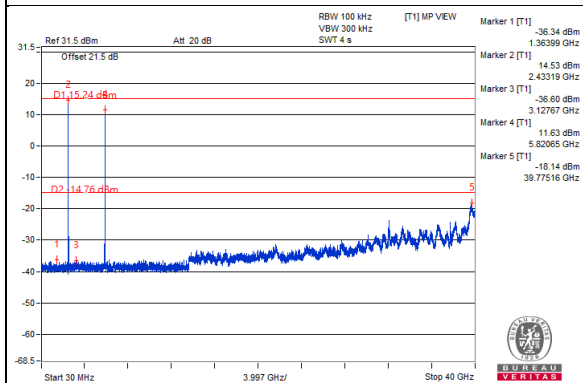

Chain 1

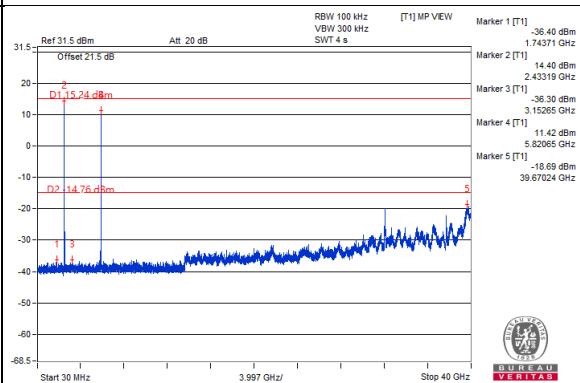

Chain 2

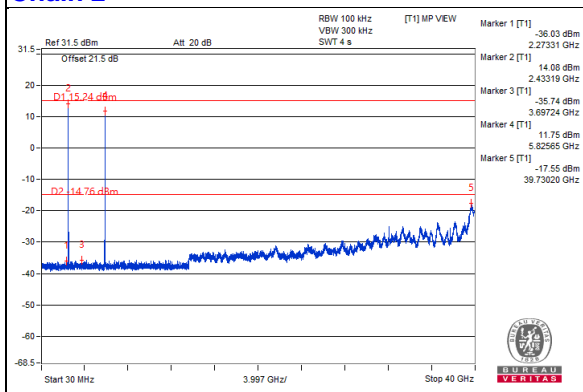

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---