



# FCC RF Test Report

**APPLICANT** : MTRLC LLC  
**EQUIPMENT** : AX3000 Dual-band Mesh WiFi  
**BRAND NAME** : Motorola  
**MODEL NAME** : Q11  
**FCC ID** : 2AF5PQ11  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure  
**TEST DATE(S)** : Dec. 20, 2021 ~ Jan. 05, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

*Jason Jia*

Reviewed by: Jason Jia / Supervisor

*Alex Wang*

Approved by: Alex Wang / Manager



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test ..... 5

    1.4 Product Specification of Equipment Under Test ..... 5

    1.5 Modification of EUT ..... 7

    1.6 Testing Location ..... 7

    1.7 Test Software ..... 7

    1.8 Applicable Standards ..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1 Carrier Frequency and Channel ..... 9

    2.2 Test Mode ..... 10

    2.3 Connection Diagram of Test System ..... 12

    2.4 Support Unit used in test configuration and system ..... 13

    2.5 EUT Operation Test Setup ..... 13

    2.6 Measurement Results Explanation Example ..... 13

**3 TEST RESULT ..... 14**

    3.1 26dB & 99% Occupied Bandwidth Measurement ..... 14

    3.2 Maximum Conducted Output Power Measurement ..... 19

    3.3 Power Spectral Density Measurement ..... 21

    3.4 Unwanted Emissions Measurement ..... 25

    3.5 AC Conducted Emission Measurement ..... 30

    3.6 Antenna Requirements ..... 32

**4 LIST OF MEASURING EQUIPMENT ..... 33**

**5 UNCERTAINTY OF EVALUATION ..... 34**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR1D0112B	Rev. 01	Initial issue of report	Mar. 18, 2022



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Report only	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm for Band 1, and 24 dBm for Band 2 / 3	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 17 dBm for Band 1, and 11 dBm for Band 2 / 3	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 0.27 dB at 5465.040 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 5.25 dB at 0.608 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	Pass	-

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

MTRLC LLC  
275 Turnpike Street Suite 101 Canton, MA 02021

## 1.2 Manufacturer

MTRLC LLC  
275 Turnpike Street Suite 101 Canton, MA 02021

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	AX3000 Dual-band Mesh WiFi
Brand Name	Motorola
Model Name	Q11
FCC ID	2AF5PQ11
HW Version	REV1.0
SW Version	REV1.0
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz
Maximum Output Power to Antenna	<p>&lt;CDD Mode&gt;            &lt;5180 MHz ~ 5240 MHz&gt;            802.11a : 26.77 dBm / 0.4753 W            802.11n HT20 : 27.20 dBm / 0.5248 W            802.11n HT40 : 26.06 dBm / 0.4036 W            802.11ac VHT20 : 27.21 dBm / 0.5260 W            802.11ac VHT40 : 26.09 dBm / 0.4064 W            802.11ac VHT80 : 20.71 dBm / 0.1178 W            802.11ax HE20 : 27.38 dBm / 0.5470 W            802.11ax HE40 : 26.28 dBm / 0.4246 W            802.11ax HE80 : 21.06 dBm / 0.1276 W</p> <p>&lt;5260 MHz ~ 5320 MHz&gt;            802.11a : 20.88 dBm / 0.1225 W            802.11n HT20 : 21.11 dBm / 0.1291 W            802.11n HT40 : 23.58 dBm / 0.2280 W            802.11ac VHT20 : 21.21 dBm / 0.1321 W            802.11ac VHT40 : 23.60 dBm / 0.2291 W            802.11ac VHT80 : 21.78 dBm / 0.1507 W            802.11ax HE20 : 21.53 dBm / 0.1422 W</p>



	<p>802.11ax HE40 : 23.85 dBm / 0.2427 W              802.11ax HE80 : 22.13 dBm / 0.1633 W              802.11ax HE160 : 20.20 dBm / 0.1047 W  <b>&lt;5500 MHz ~ 5700 MHz &gt;</b>              802.11a : 20.85 dBm / 0.1216 W              802.11n HT20 : 21.01 dBm / 0.1262 W              802.11n HT40 : 23.57 dBm / 0.2275 W              802.11ac VHT20 : 21.09 dBm / 0.1285 W              802.11ac VHT40 : 23.63 dBm / 0.2307 W              802.11ac VHT80 : 23.74 dBm / 0.2366 W              802.11ax HE20 : 21.25 dBm / 0.1334 W              802.11ax HE40 : 23.82 dBm / 0.2410 W              802.11ax HE80 : 23.92 dBm / 0.2466 W              802.11ax HE160 : 21.48 dBm / 0.1406 W</p>									
99% Occupied Bandwidth	<p><b>&lt;5180 MHz ~ 5240 MHz&gt;</b>              802.11a : 17.13 MHz              802.11ax HE20 : 19.28 MHz              802.11ax HE40 : 37.76 MHz              802.11ax HE80 : 76.84 MHz  <b>&lt;5260 MHz ~ 5320 MHz&gt;</b>              802.11a : 17.03 MHz              802.11ax HE20 : 19.13 MHz              802.11ax HE40 : 37.76 MHz              802.11ax HE80 : 76.84 MHz              802.11ax HE160 : 155.84 MHz  <b>&lt;5500 MHz ~ 5700 MHz &gt;</b>              802.11a : 17.03 MHz              802.11ax HE20 : 19.13 MHz              802.11ax HE40 : 37.76 MHz              802.11ax HE80 : 76.84 MHz              802.11ax HE160 : 155.60 MHz</p>									
Antenna Type / Gain	<p><b>&lt;5150 MHz ~ 5250 MHz&gt;</b>              &lt;Ant. 1&gt; : Dipole Antenna with gain 4.1 dBi              &lt;Ant. 2&gt; : Dipole Antenna with gain 4.8 dBi  <b>&lt;5250 MHz ~ 5350 MHz&gt;</b>              &lt;Ant. 1&gt; : Dipole Antenna with gain 4.1 dBi              &lt;Ant. 2&gt; : Dipole Antenna with gain 4.8 dBi  <b>&lt;5470 MHz ~ 5725 MHz&gt;</b>              &lt;Ant. 1&gt; : Dipole Antenna with gain 4.1 dBi              &lt;Ant. 2&gt; : Dipole Antenna with gain 4.8 dBi</p>									
Type of Modulation	<p>802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)              802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)              802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)</p>									
Antenna Function Description	<table border="1"> <thead> <tr> <th></th> <th>Ant. 1</th> <th>Ant. 2</th> </tr> </thead> <tbody> <tr> <td>802.11a/n/ac/ax SISO</td> <td>V</td> <td>V</td> </tr> <tr> <td>802.11a/n/ac/ax CDD/Beamforming</td> <td colspan="2">V</td> </tr> </tbody> </table>		Ant. 1	Ant. 2	802.11a/n/ac/ax SISO	V	V	802.11a/n/ac/ax CDD/Beamforming	V	
	Ant. 1	Ant. 2								
802.11a/n/ac/ax SISO	V	V								
802.11a/n/ac/ax CDD/Beamforming	V									

**Note:**

1. For SISO&MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power.



- 2. For 802.11n HT20 / ac VHT20 / ax HE20 and 802.11n HT40 / ac VHT40 / ax HE40 and 802.11ac VHT80 / ax HE80 mode the whole testing have assessed only 802.11ax HE20/ HE40/HE80 by referring to the higher output power for OB/PSD/RSE testing.
- 3. The TxBF Power/EIRP of EUT will less than CDD mode power/EIRP when Beamforming mode is active. So we only evaluate CDD mode by referring to their maximum conducted power/EIRP.
- 4. The device does not support partial RU for 802.11ax mode.
- 5. The device support TPC mechanism.

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24



## **1.8 Applicable Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

### **Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.





## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 <sup>#</sup>	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 <sup>#</sup>	5290		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz U-NII-2C	100	5500	114 <sup>S</sup>	5570
	102*	5510	116	5580
	104	5520	132	5660
	106 <sup>#</sup>	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700
	112	5560		



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 <sup>#</sup>	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	50 <sup>\$</sup>	5250		

**Note:**

1. The above Frequency and Channel in "\*" were 802.11n HT40/11ac VHT40/11ax HE40.
2. The above Frequency and Channel in "#" were 802.11ac VHT80 /11ax HE80.
3. The above Frequency and Channel in "\$" were 802.11ax HE160.

## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

**CDD Mode**

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0
802.11ax HE160	MCS0


Test Modes: Radiated Spurious Emission	
802.11a	802.11ax HE20
CH36 (5180MHz)	CH36 (5180MHz)
CH44 (5220MHz)	CH44 (5220MHz)
CH48 (5240MHz)	CH48 (5240MHz)
CH52 (5260MHz)	CH52 (5260MHz)
CH60 (5300MHz)	CH60 (5300MHz)
CH64 (5320MHz)	<b>CH64 (5320MHz)</b>
CH100 (5500MHz)	CH100 (5500MHz)
CH116 (5580MHz)	CH116 (5580MHz)
CH140 (5700MHz)	CH140 (5700MHz)




802.11ax HE40	802.11ax HE80
CH38 (5190MHz)	
CH46 (5230MHz)	
CH54 (5270MHz)	
CH62 (5310MHz)	
<b>CH102 (5510MHz)</b>	<b>CH42 (5210MHz)</b>
CH110 (5550MHz)	CH58 (5290MHz)
CH134 (5670MHz)	CH106 (5530MHz)
	CH122 (5610MHz)
802.11ax HE160	
CH50 (5250MHz)	
<b>CH114 (5570MHz)</b>	
<b>Remark:</b>	
<ol style="list-style-type: none"> <li>1. For Radiated Test Cases, The tests were performance with Adapter.</li> <li>2. All test modes of the Radiated Spurious Emission (RSE) were tested; only the worse data in each bandwidth shown in bold for these modes is reported.</li> </ol>	
Test Modes: AC Conducted Emission	
Mode 1 : WLAN (5G) Link+LAN Link+WAN Link+Power from Adapter	

## 2.3 Connection Diagram of Test System

For Conducted Emission:

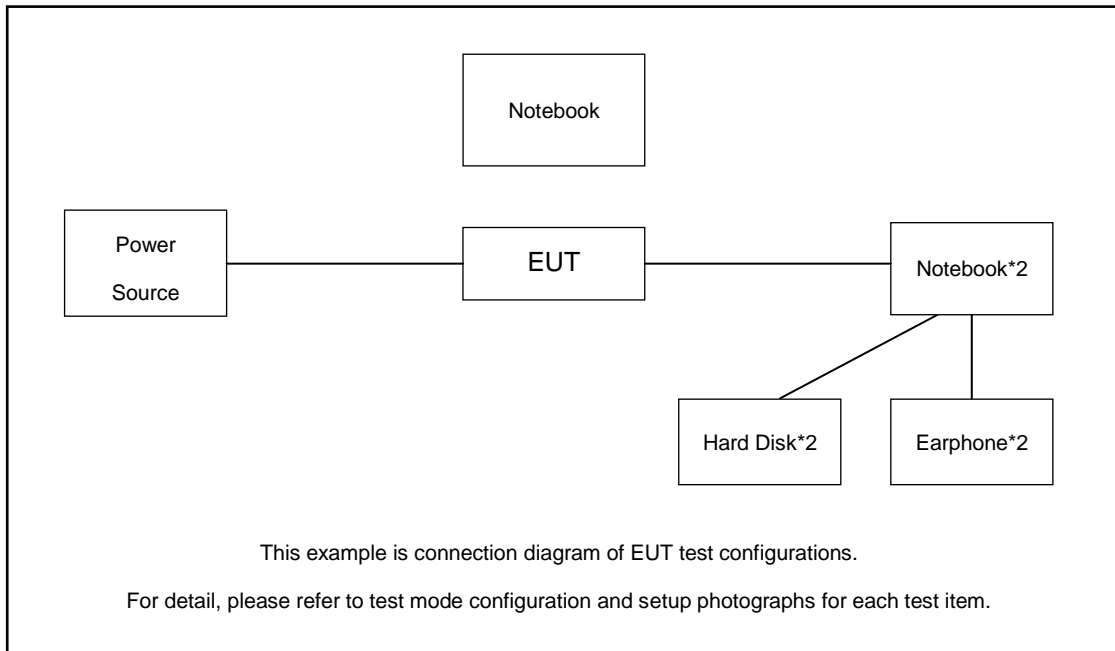

For Radiated Emission:

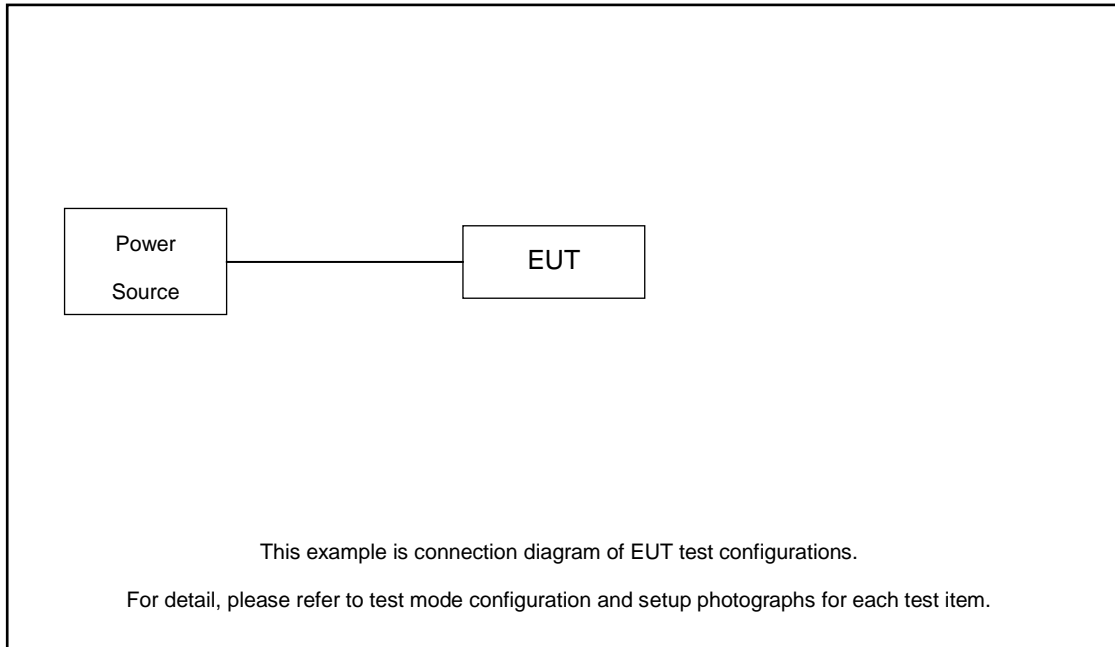

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
2.	Hard Disk	WD	C6B	N/A	N/A	N/A
3.	Earphone	Lenovo	P121	N/A	N/A	Unshielded, 1.2m

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the notebook under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 7.0 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 7.0 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 26dB & 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1%~5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
8. Measure and record the results in the test report.

##### 3.1.4 Test Setup

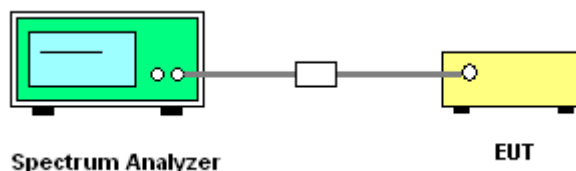



##### 3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

Only the maximum 26dB & 99% OB plots of each bandwidth shown in the report.





For 20MHz:

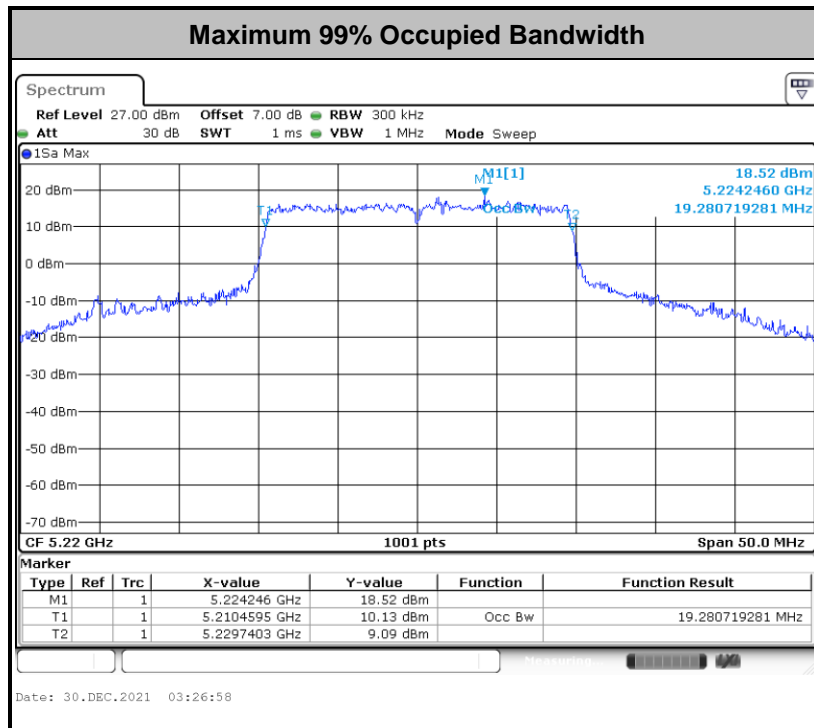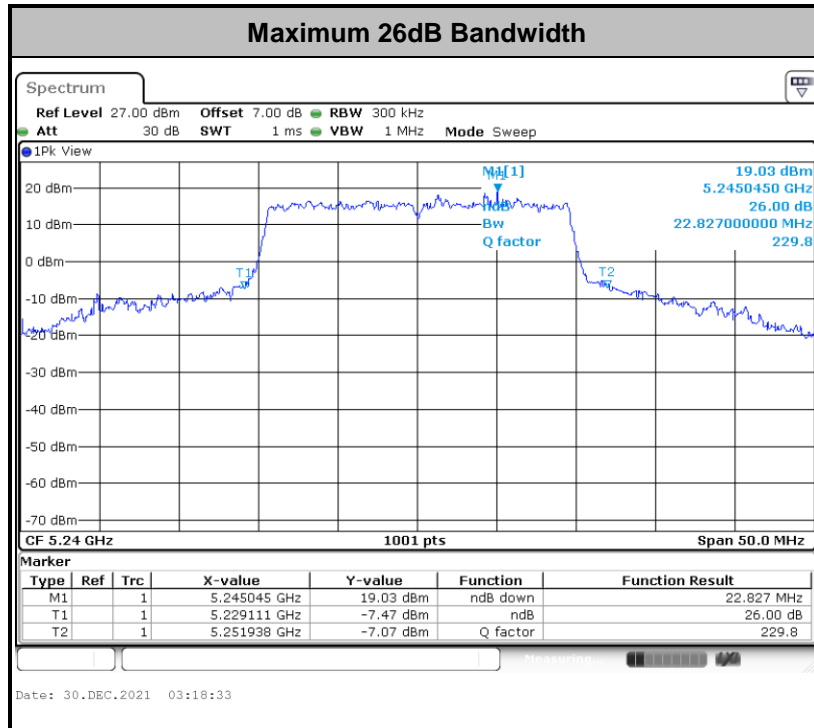





For 40MHz:

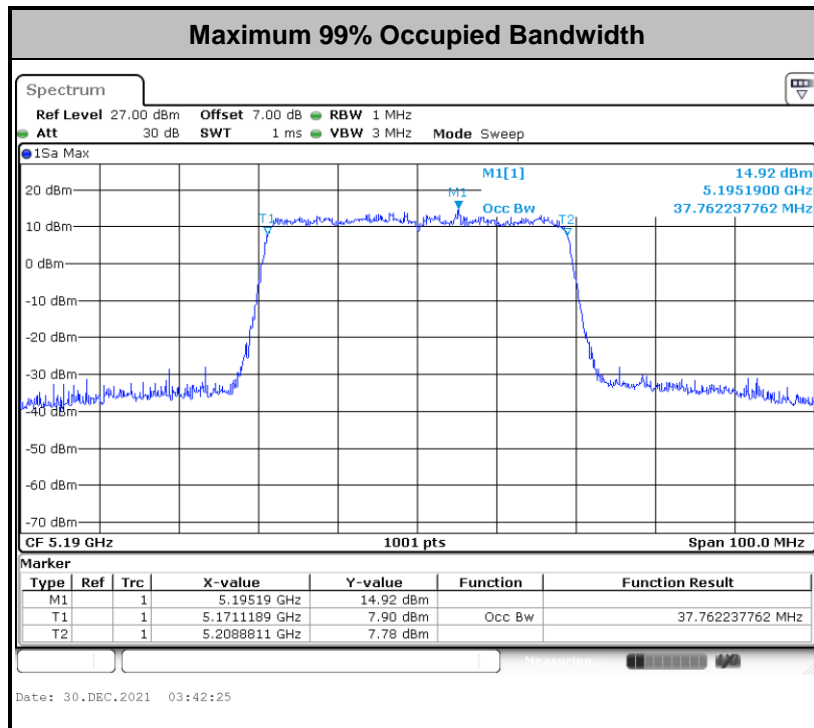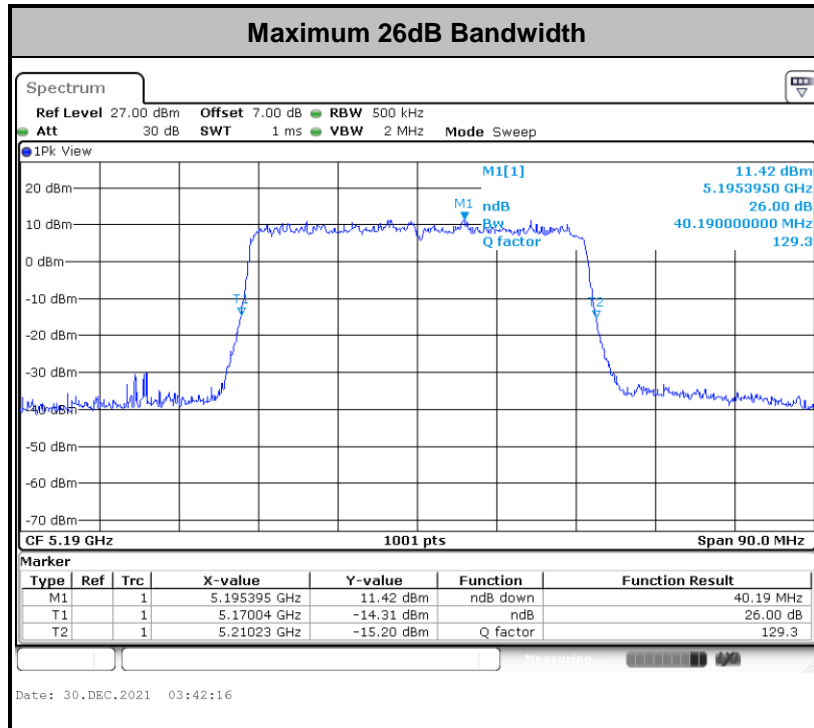







For 80MHz:

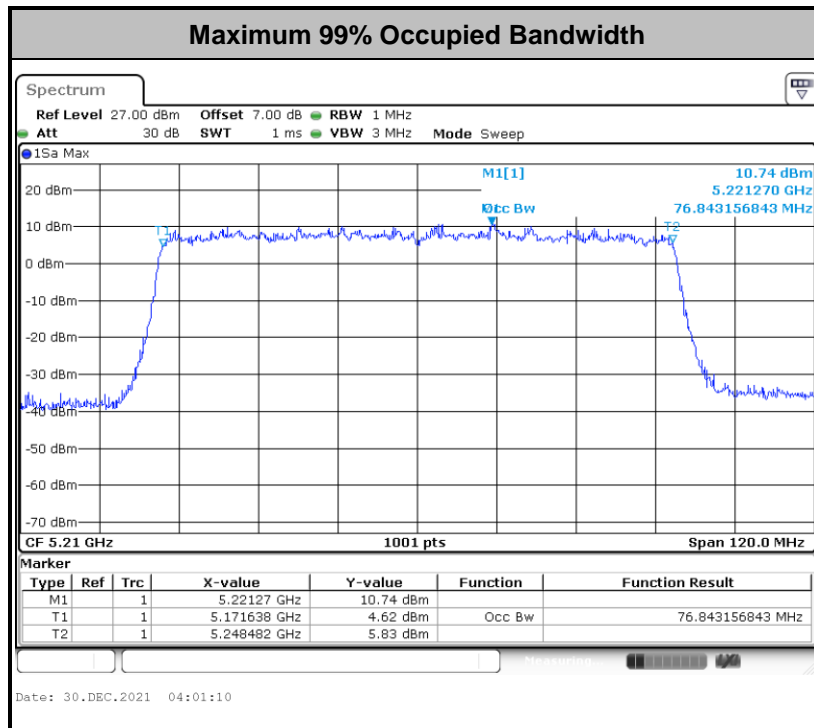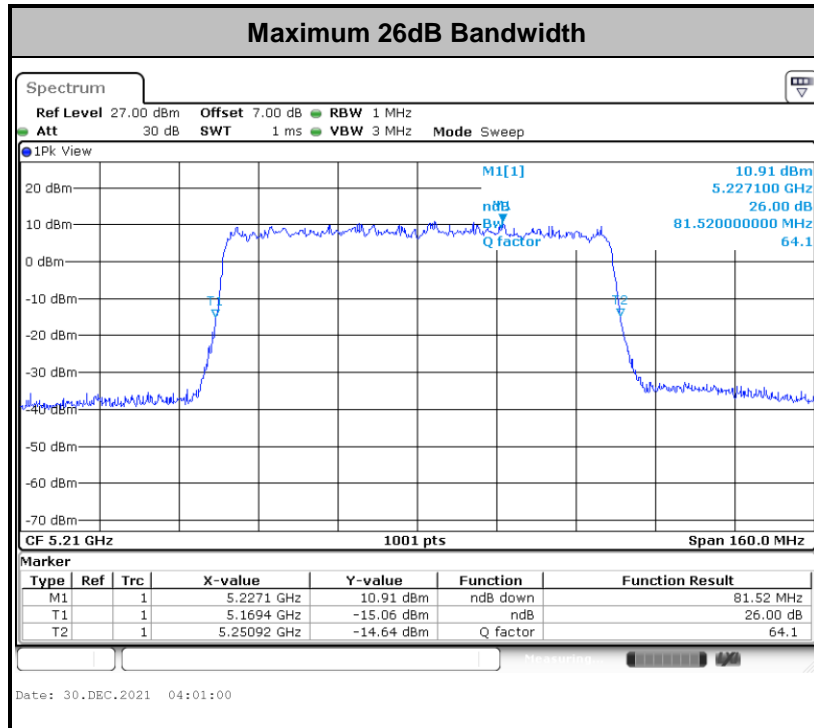



For 160MHz:

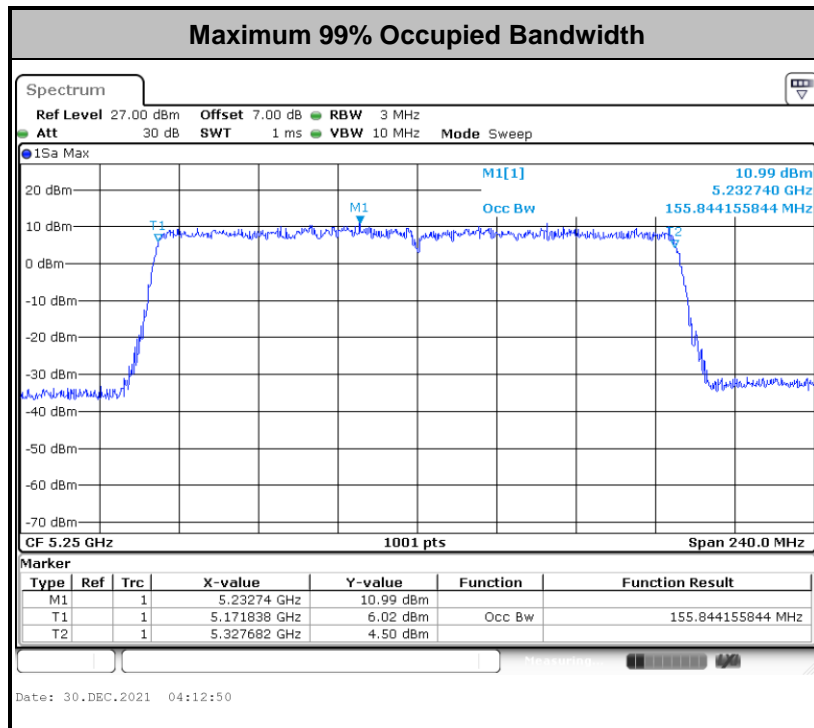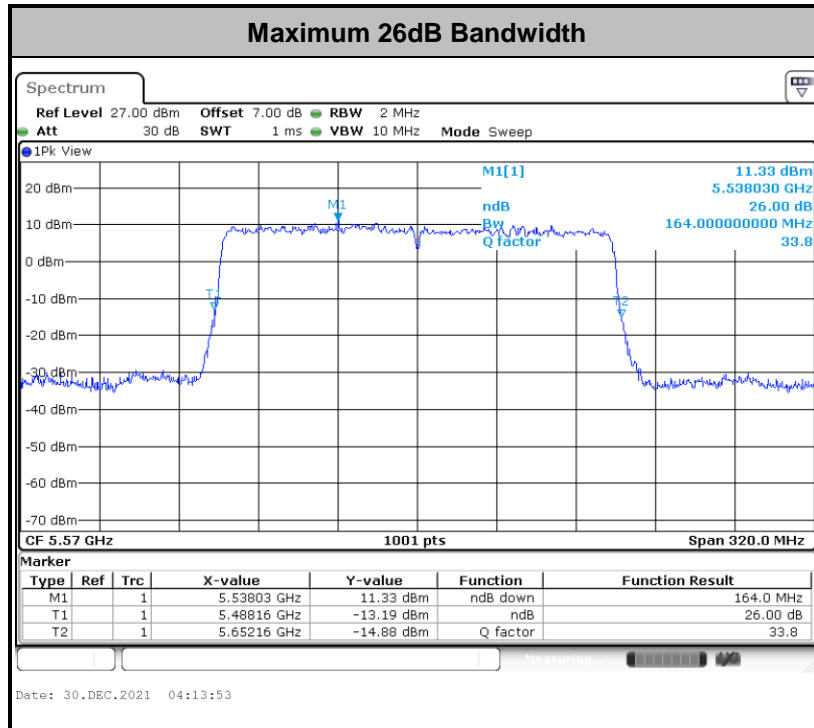

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm  $10 \log B$ , where B is the 26 dB emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

### 3.2.4 Test Setup

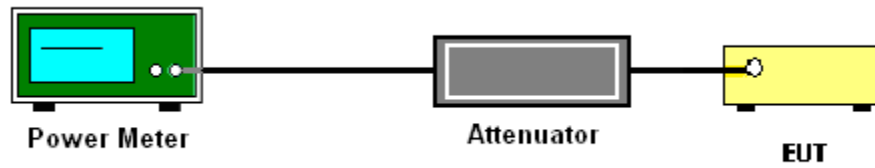

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

**# Method SA-2 #**

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW  $\geq$  3 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is the bin-by-bin summation to obtain the combined spectrum. For the device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

Method (c): Measure and add  $10 \log(N_{ANT})$  dB, where  $N_{ANT}$  is the number of outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The quantity  $10 \log(N_{ANT})$  dB is added to each spectrum value before comparing to the emission limit.

### 3.3.4 Test Setup

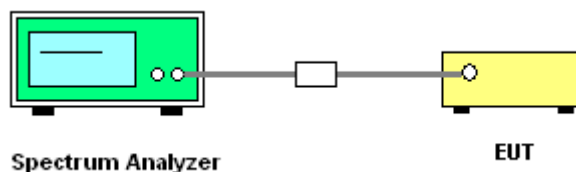


### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.


Only the maximum PSD plots of each bandwidth shown in the report.



For 20MHz:

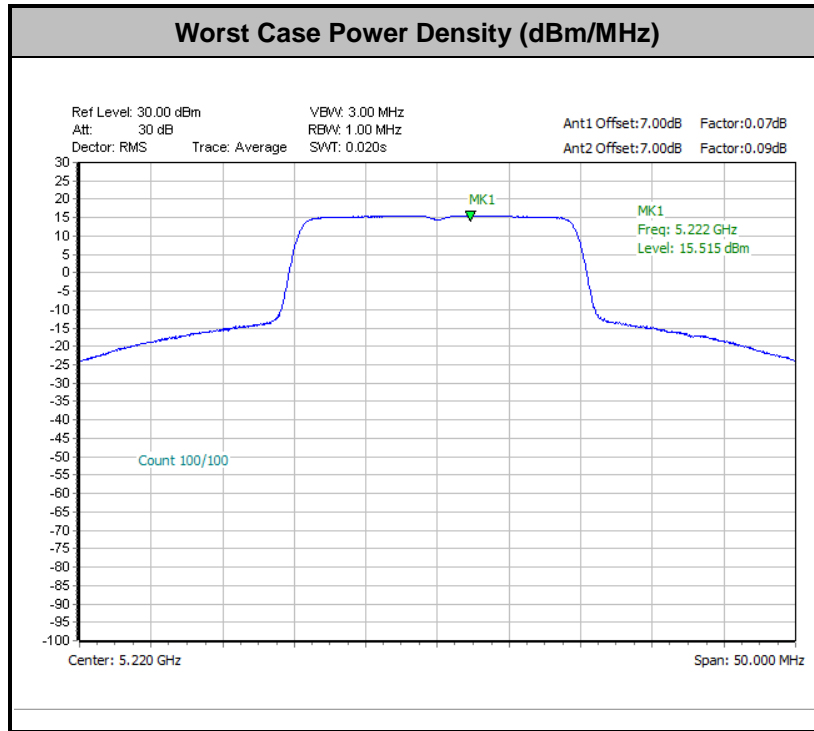


For 40MHz:

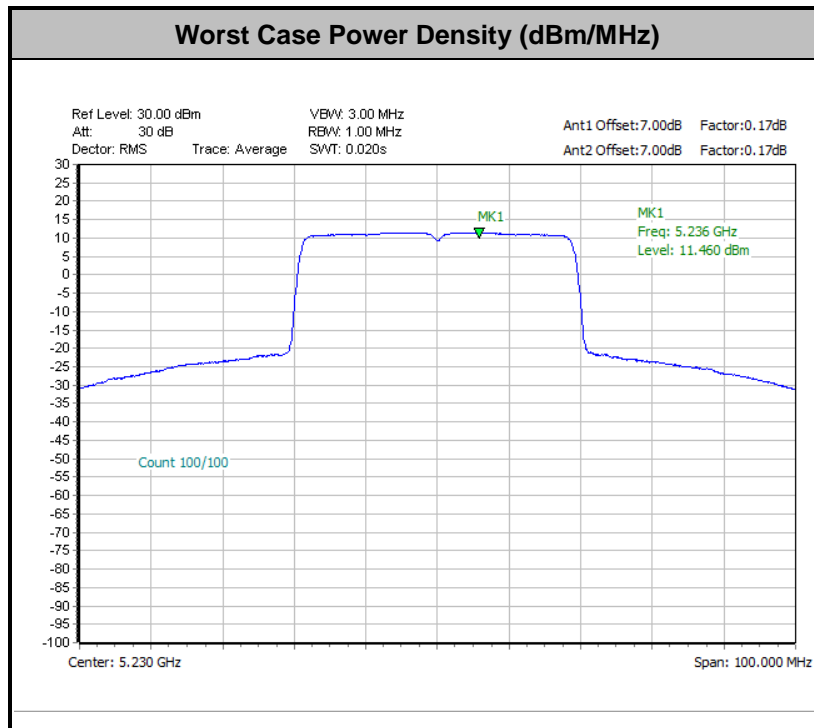




For 80MHz:

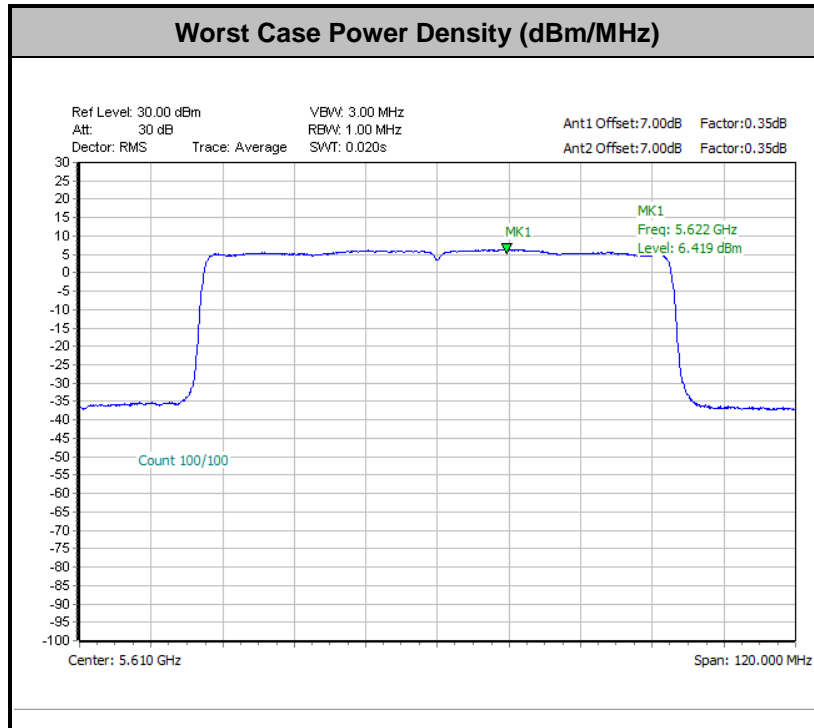

For 160MHz:

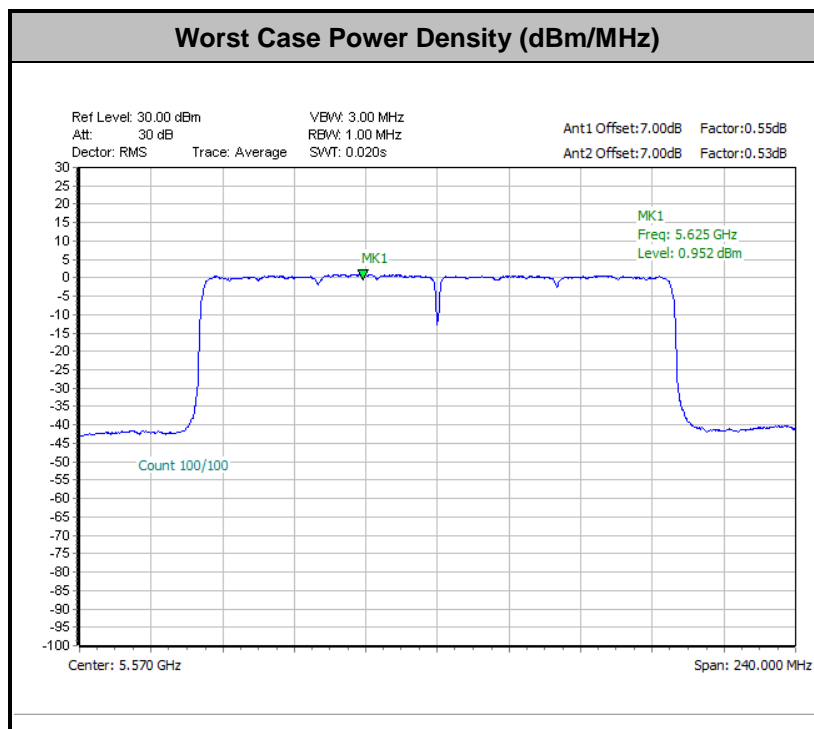

Note: Average Power Density (dB) = Measured value+ Duty Factor





### 3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5725 MHz band: all emissions outside of the 5470-5725 MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log(d_{Meas}) - 104.77$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E<sub>Meas</sub> is the field strength of the emission at the measurement distance, in dBμV/m

d<sub>Meas</sub> is the measurement distance, in m

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

- The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.

4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


### 3.4.4 Test Setup

For radiated emissions below 30MHz

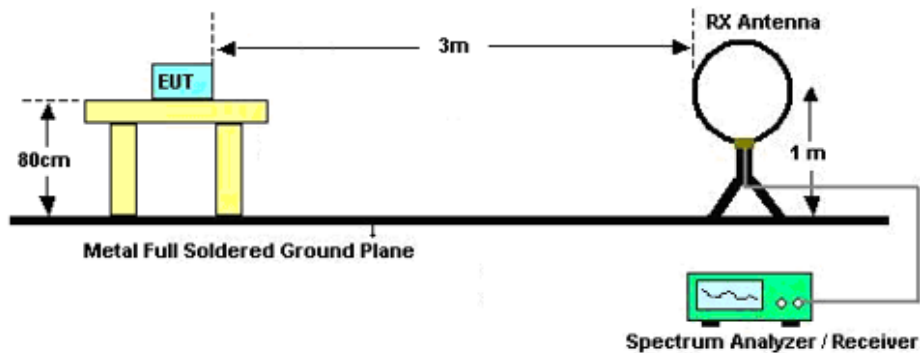


For radiated emissions from 30MHz to 1GHz

<CDD Mode>

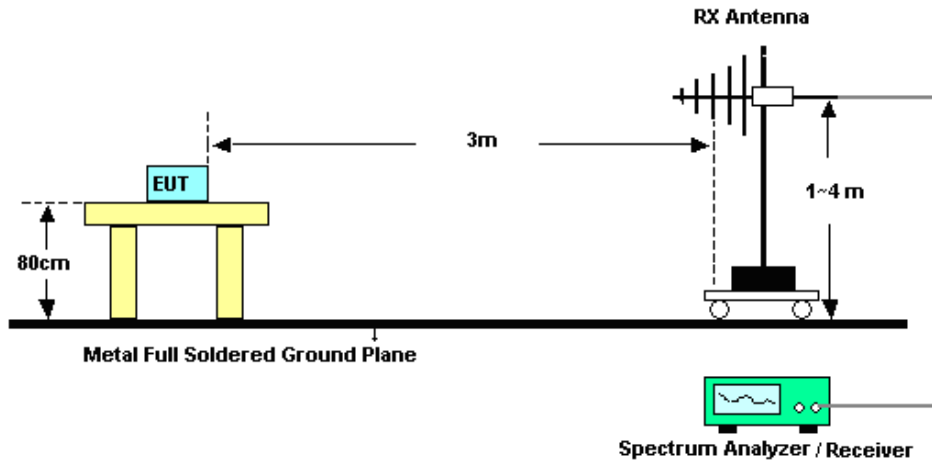

For radiated emissions above 1GHz

<CDD Mode>

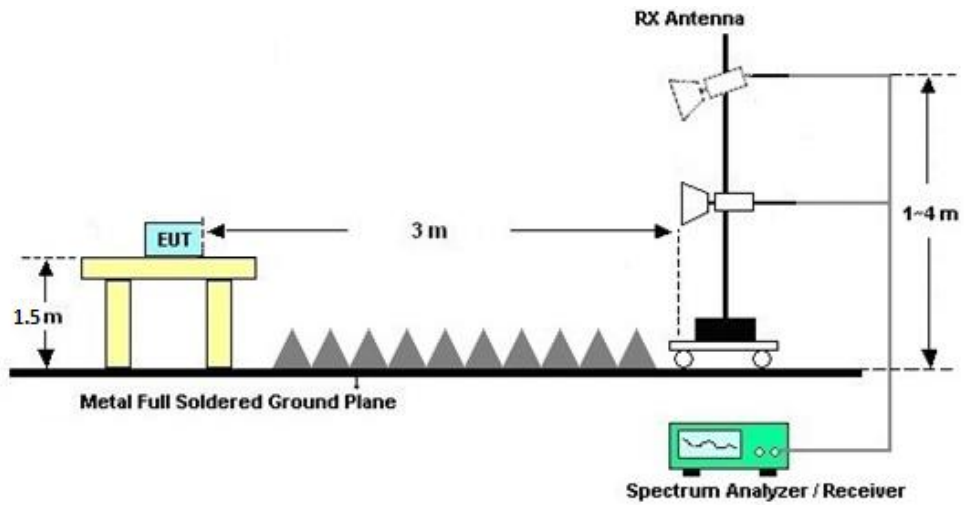



### **3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.4.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.4.7 Duty Cycle**

Please refer to Appendix D.

### **3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

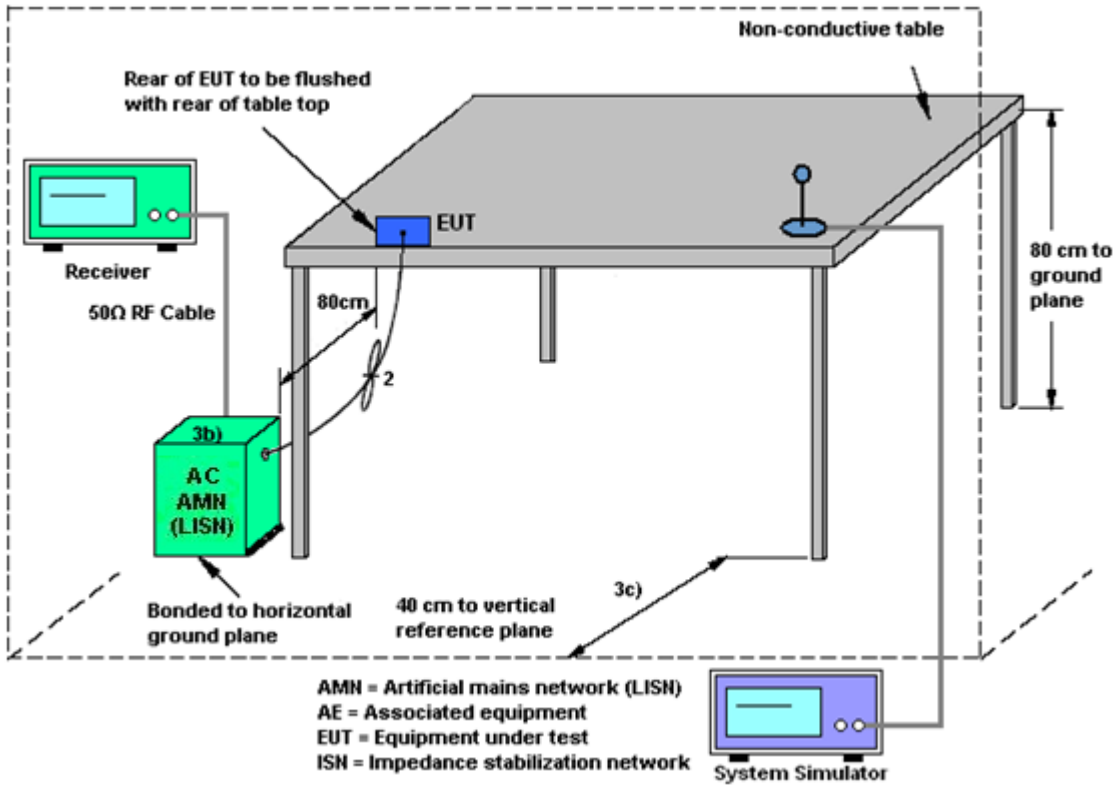

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



### 3.6 Antenna Requirements

#### 3.6.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.6.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

For power, the directional gain G<sub>ANT</sub> is set equal to the antenna having the highest gain, i.e.,

Directional gain = G<sub>ANT MAX</sub>(Ant.1 Gain, Ant.2 Gain,...) + Array Gain, as following table for Power, where Array Gain = 0 dB (i.e., no array gain) for N<sub>ANT</sub> ≤ 4;

For PSD, the directional gain calculation is following,

Directional gain = 10 log[(10<sup>G<sup>1</sup>/20</sup> + 10<sup>G<sup>2</sup>/20</sup> + ... + 10<sup>G<sup>n</sup>/20</sup>)<sup>2</sup> / N<sub>ANT</sub>] dBi, as following table for PSD.

N<sub>ANT</sub> = number of transmit antennas

N<sub>SS</sub> = number of spatial streams. (The worst case directional gain will occur when NSS = 1).

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<b>&lt;CDD Modes&gt;</b>						
	<b>Ant. 1</b>	<b>Ant. 2</b>	<b>DG for Power</b>	<b>DG for PSD</b>	<b>Power Limit Reduction</b>	<b>PSD Limit Reduction</b>
	<b>(dBi)</b>	<b>(dBi)</b>	<b>(dBi)</b>	<b>(dBi)</b>	<b>(dB)</b>	<b>(dB)</b>
<b>Band I</b>	4.10	4.80	4.80	7.47	0.00	1.47
<b>Band II</b>	4.10	4.80	4.80	7.47	0.00	1.47
<b>Band III</b>	4.10	4.80	4.80	7.47	0.00	1.47

Power limit reduction = Composite gain – 6dBi, ( min = 0 )

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, ( min = 0 )





## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Dec. 30, 2021	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 07, 2021	Dec. 30, 2021	Jan. 06, 2022	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 07, 2021	Dec. 30, 2021	Jan. 06, 2022	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 16, 2021	Jan. 05, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G,MAX 30dB	Apr.13, 2021	Jan. 05, 2022	Apr. 12, 2022	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Jan. 05, 2022	Oct. 29, 2022	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	Jun. 04, 2021	Jan. 05, 2022	Jun. 03, 2022	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 24, 2021	Jan. 05, 2022	Apr. 23, 2022	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 06, 2021	Jan. 05, 2022	Jan. 05, 2022	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Apr. 12, 2021	Jan. 05, 2022	Apr. 11, 2022	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 07, 2021	Jan. 05, 2022	Jan. 06, 2022	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2012228	1Ghz~18Ghz	Oct. 16, 2021	Jan. 05, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 16, 2021	Jan. 05, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jan. 05, 2022	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jan. 05, 2022	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jan. 05, 2022	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 21, 2021	Dec. 20, 2021	Apr. 20, 2022	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Dec. 20, 2021	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Oct. 14, 2021	Dec. 20, 2021	Oct. 13, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Dec. 20, 2021	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



## **Appendix A. Conducted Test Results**

Test Engineer:	Jacob Zhang	Temperature:	21~25	°C
Test Date:	2021/12/30	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**26dB and 99% OBW**

U-NII-1 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	5180	17.03	16.83	21.53	21.53	-	-	22.26	22.26	
11a	6Mbps	2	44	5220	17.08	17.13	21.58	22.48	-	-	22.33	22.33	
11a	6Mbps	2	48	5240	17.13	17.08	21.68	22.48	-	-	22.33	22.33	

**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-1 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	5180	0.21	0.21	20.26	20.69	23.49	30.00		4.80	Pass	
11a	6Mbps	2	44	5220	0.21	0.21	23.28	24.02	26.68	30.00		4.80	Pass	
11a	6Mbps	2	48	5240	0.21	0.21	23.33	24.15	26.77	30.00		4.80	Pass	
HT20	MCS0	2	36	5180	0.21	0.21	19.99	20.63	23.33	30.00		4.80	Pass	
HT20	MCS0	2	44	5220	0.21	0.21	23.91	24.45	27.20	30.00		4.80	Pass	
HT20	MCS0	2	48	5240	0.21	0.21	23.73	24.57	27.18	30.00		4.80	Pass	
HT40	MCS0	2	38	5190	0.46	0.42	18.52	18.58	21.56	30.00		4.80	Pass	
HT40	MCS0	2	46	5230	0.46	0.42	22.94	23.16	26.06	30.00		4.80	Pass	
VHT20	MCS0	2	36	5180	0.07	0.07	19.96	20.69	23.35	30.00		4.80	Pass	
VHT20	MCS0	2	44	5220	0.07	0.07	23.90	24.48	27.21	30.00		4.80	Pass	
VHT20	MCS0	2	48	5240	0.07	0.07	23.74	24.61	27.20	30.00		4.80	Pass	
VHT40	MCS0	2	38	5190	0.13	0.13	18.49	18.65	21.58	30.00		4.80	Pass	
VHT40	MCS0	2	46	5230	0.13	0.13	22.91	23.25	26.09	30.00		4.80	Pass	
VHT80	MCS0	2	42	5210	0.29	0.29	17.65	17.74	20.71	30.00		4.80	Pass	

**TEST RESULTS DATA**  
**Power Spectral Density**

FCC U-NII-1 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	5180	0.21	0.21			11.99	15.53	7.47			Pass
11a	6Mbps	2	44	5220	0.21	0.21			15.37	15.53	7.47			Pass
11a	6Mbps	2	48	5240	0.21	0.21			15.24	15.53	7.47			Pass

**TEST RESULTS DATA**  
**26dB and 99% OBW**

U-NII-2A MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	52	5260	17.03	16.83	21.53	21.43	23.26	23.26	29.26	29.26	23.98		
11a	6Mbps	2	60	5300	17.03	16.83	21.53	21.43	23.26	23.26	29.26	29.26	23.98		
11a	6Mbps	2	64	5320	17.03	16.83	21.48	21.43	23.26	23.26	29.26	29.26	23.98		



**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-2A MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	52	5260	0.21	0.21	17.66	17.99	20.84	23.98	23.98	4.80	30	Pass	
11a	6Mbps	2	60	5300	0.21	0.21	17.72	17.94	20.84	23.98	23.98	4.80	30	Pass	
11a	6Mbps	2	64	5320	0.21	0.21	17.63	18.09	20.88	23.98	23.98	4.80	30	Pass	
HT20	MCS0	2	52	5260	0.21	0.21	17.92	18.28	21.11	23.98	23.98	4.80	30	Pass	
HT20	MCS0	2	60	5300	0.21	0.21	17.84	18.27	21.07	23.98	23.98	4.80	30	Pass	
HT20	MCS0	2	64	5320	0.21	0.21	17.83	18.29	21.08	23.98	23.98	4.80	30	Pass	
HT40	MCS0	2	54	5270	0.46	0.42	20.84	20.28	23.58	23.98	23.98	4.80	30	Pass	
HT40	MCS0	2	62	5310	0.46	0.42	17.92	18.27	21.11	23.98	23.98	4.80	30	Pass	
VHT20	MCS0	2	52	5260	0.07	0.07	17.96	18.43	21.21	23.98	23.98	4.80	30	Pass	
VHT20	MCS0	2	60	5300	0.07	0.07	17.85	18.32	21.10	23.98	23.98	4.80	30	Pass	
VHT20	MCS0	2	64	5320	0.07	0.07	17.94	18.36	21.16	23.98	23.98	4.80	30	Pass	
VHT40	MCS0	2	54	5270	0.13	0.13	20.38	20.80	23.60	23.98	23.98	4.80	30	Pass	
VHT40	MCS0	2	62	5310	0.13	0.13	18.02	18.25	21.15	23.98	23.98	4.80	30	Pass	
VHT80	MCS0	2	58	5290	0.29	0.29	18.56	18.97	21.78	23.98	23.98	4.80	30	Pass	

**TEST RESULTS DATA**  
**Power Spectral Density**

U-NII-2A MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	52	5260	0.21	0.21			9.42	9.53		7.47		Pass
11a	6Mbps	2	60	5300	0.21	0.21			9.29	9.53		7.47		Pass
11a	6Mbps	2	64	5320	0.21	0.21			9.30	9.53		7.47		Pass

**TEST RESULTS DATA**  
**26dB and 99% OBW**

U-NII-2C MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
11a	6Mbps	2	100	5500	17.03	16.83	21.43	21.38	23.26	29.26	23.98	23.98	----	----		
11a	6Mbps	2	116	5580	16.98	16.83	21.48	21.38	23.26	29.26	23.98	23.98	----	----		
11a	6Mbps	2	140	5700	17.03	16.83	21.53	21.38	23.26	29.26	23.98	23.98	----	----		

**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-2C MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	100	5500	0.21	0.21	17.59	18.07	20.85	23.98	4.80	30	Pass		
11a	6Mbps	2	116	5580	0.21	0.21	17.57	17.86	20.73	23.98	4.80	30	Pass		
11a	6Mbps	2	140	5700	0.21	0.21	17.53	17.78	20.67	23.98	4.80	30	Pass		
HT20	MCS0	2	100	5500	0.21	0.21	17.79	18.20	21.01	23.98	4.80	30	Pass		
HT20	MCS0	2	116	5580	0.21	0.21	17.75	17.89	20.83	23.98	4.80	30	Pass		
HT20	MCS0	2	140	5700	0.21	0.21	15.63	15.74	18.70	23.98	4.80	30	Pass		
HT40	MCS0	2	102	5510	0.46	0.42	18.64	18.99	21.83	23.98	4.80	30	Pass		
HT40	MCS0	2	110	5550	0.46	0.42	20.42	20.70	23.57	23.98	4.80	30	Pass		
HT40	MCS0	2	134	5670	0.46	0.42	19.75	19.95	22.86	23.98	4.80	30	Pass		
VHT20	MCS0	2	100	5500	0.07	0.07	17.73	18.40	21.09	23.98	4.80	30	Pass		
VHT20	MCS0	2	116	5580	0.07	0.07	17.65	18.12	20.90	23.98	4.80	30	Pass		
VHT20	MCS0	2	140	5700	0.07	0.07	15.48	16.03	18.77	23.98	4.80	30	Pass		
VHT40	MCS0	2	102	5510	0.13	0.13	18.63	19.05	21.85	23.98	4.80	30	Pass		
VHT40	MCS0	2	110	5550	0.13	0.13	20.42	20.81	23.63	23.98	4.80	30	Pass		
VHT40	MCS0	2	134	5670	0.13	0.13	19.69	20.14	22.93	23.98	4.80	30	Pass		
VHT80	MCS0	2	106	5530	0.29	0.29	19.00	19.43	22.23	23.98	4.80	30	Pass		
VHT80	MCS0	2	122	5610	0.29	0.29	20.41	21.03	23.74	23.98	4.80	30	Pass		

**TEST RESULTS DATA**  
**Power Spectral Density**

U-NII-2C MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	100	5500	0.21	0.21			9.47	9.53	7.47		Pass	
11a	6Mbps	2	116	5580	0.21	0.21			9.21	9.53	7.47		Pass	
11a	6Mbps	2	140	5700	0.21	0.21			9.11	9.53	7.47		Pass	

**TEST RESULTS DATA**  
**26dB and 99% OBW**

U-NII-1 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	36	5180	Full	19.03	19.13	21.53	21.28	-	-	22.79	-	
HE20	MCS0	2	44	5220	Full	19.13	19.28	22.03	21.98	-	-	22.82	-	
HE20	MCS0	2	48	5240	Full	19.13	19.28	22.28	22.83	-	-	22.82	-	
HE40	MCS0	2	38	5190	Full	37.76	37.76	40.19	39.92	-	-	23.01	-	
HE40	MCS0	2	46	5230	Full	37.76	37.76	40.19	40.01	-	-	23.01	-	
HE80	MCS0	2	42	5210	Full	76.84	76.84	81.52	81.04	-	-	23.01	-	

**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-1 MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	36	5180	Full	0.07	0.09	20.32	20.85	23.61	30.00	4.80		Pass	
HE20	MCS0	2	44	5220	Full	0.07	0.09	24.00	24.70	27.38	30.00	4.80		Pass	
HE20	MCS0	2	48	5240	Full	0.07	0.09	23.95	24.61	27.30	30.00	4.80		Pass	
HE40	MCS0	2	38	5190	Full	0.17	0.17	18.76	18.86	21.82	30.00	4.80		Pass	
HE40	MCS0	2	46	5230	Full	0.17	0.17	23.04	23.48	26.28	30.00	4.80		Pass	
HE80	MCS0	2	42	5210	Full	0.35	0.35	17.93	18.17	21.06	30.00	4.80		Pass	

**TEST RESULTS DATA**  
**Power Spectral Density**

FCC U-NII-1 MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	36	5180	Full	0.07	0.09			11.64	15.53	7.47		Pass	
HE20	MCS0	2	44	5220	Full	0.07	0.09			15.52	15.53	7.47		Pass	
HE20	MCS0	2	48	5240	Full	0.07	0.09			15.42	15.53	7.47		Pass	
HE40	MCS0	2	38	5190	Full	0.17	0.17			6.93	15.53	7.47		Pass	
HE40	MCS0	2	46	5230	Full	0.17	0.17			11.46	15.53	7.47		Pass	
HE80	MCS0	2	42	5210	Full	0.35	0.35			3.55	15.53	7.47		Pass	



**TEST RESULTS DATA**  
**26dB and 99% OBW**

U-NII-2A MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	52	5260	Full	19.03	19.13	21.53	21.33	23.79	29.79	23.98				
HE20	MCS0	2	60	5300	Full	19.03	19.08	21.73	21.48	23.79	29.79	23.98				
HE20	MCS0	2	64	5320	Full	19.03	19.13	21.58	21.58	23.79	29.79	23.98				
HE40	MCS0	2	54	5270	Full	37.76	37.66	40.19	39.92	23.98	30.00	23.98				
HE40	MCS0	2	62	5310	Full	37.56	37.66	40.10	39.92	23.98	30.00	23.98				
HE80	MCS0	2	58	5290	Full	76.84	76.72	81.52	81.04	23.98	30.00	23.98				
HE160	MCS0	2	50	5250	Full	155.84	155.60	163.36	163.68	23.98	30.00	23.98				

**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-2A MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	2	52	5260	Full	0.07	0.09	18.22	18.67	21.46	23.98	4.80	30	Pass		
HE20	MCS0	2	60	5300	Full	0.07	0.09	18.08	18.61	21.37	23.98	4.80	30	Pass		
HE20	MCS0	2	64	5320	Full	0.07	0.09	18.30	18.73	21.53	23.98	4.80	30	Pass		
HE40	MCS0	2	54	5270	Full	0.17	0.17	20.69	20.97	23.85	23.98	4.80	30	Pass		
HE40	MCS0	2	62	5310	Full	0.17	0.17	18.31	18.52	21.43	23.98	4.80	30	Pass		
HE80	MCS0	2	58	5290	Full	0.35	0.35	18.85	19.36	22.13	23.98	4.80	30	Pass		
HE160	MCS0	2	50	5250	full	0.55	0.53	16.76	17.58	20.20	23.98	4.80	30	Pass		

**TEST RESULTS DATA**  
**Power Spectral Density**

U-NII-2A MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	52	5260	Full	0.07	0.09			9.22	9.53	7.47		Pass	
HE20	MCS0	2	60	5300	Full	0.07	0.09			9.19	9.53	7.47		Pass	
HE20	MCS0	2	64	5320	Full	0.07	0.09			9.32	9.53	7.47		Pass	
HE40	MCS0	2	54	5270	Full	0.17	0.17			8.88	9.53	7.47		Pass	
HE40	MCS0	2	62	5310	Full	0.17	0.17			6.32	9.53	7.47		Pass	
HE80	MCS0	2	58	5290	Full	0.35	0.35			4.54	9.53	7.47		Pass	
HE160	MCS0	2	50	5250	full	0.55	0.53			-0.41	9.53	7.47		Pass	

**TEST RESULTS DATA**  
**26dB and 99% OBW**

U-NII-2C MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
HE20	MCS0	2	100	5500	Full	19.08	19.13	21.78	21.73	23.81		29.81		23.98	----	----	
HE20	MCS0	2	116	5580	Full	19.08	19.13	21.68	21.43	23.81		29.81		23.98	----	----	
HE20	MCS0	2	140	5700	Full	19.03	19.13	21.63	21.68	23.79		29.79		23.98	----	----	
HE40	MCS0	2	102	5510	Full	37.76	37.66	40.19	39.92	23.98		30.00		23.98	----	----	
HE40	MCS0	2	110	5550	Full	37.76	37.66	40.19	40.01	23.98		30.00		23.98	----	----	
HE40	MCS0	2	134	5670	Full	37.66	37.56	40.19	40.01	23.98		30.00		23.98	----	----	
HE80	MCS0	2	106	5530	Full	76.72	76.72	81.20	81.20	23.98		30.00		23.98	----	----	
HE80	MCS0	2	122	5610	Full	76.84	76.84	81.52	81.36	23.98		30.00		23.98	----	----	
HE160	MCS0	2	114	5570	Full	155.60	155.60	164.00	164.00	23.98		30.00		23.98	----	----	

**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-2C MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	2	100	5500	Full	0.07	0.09	18.02	18.44	21.25	23.98	23.98	4.80	30	Pass	
HE20	MCS0	2	116	5580	Full	0.07	0.09	17.93	18.52	21.25	23.98	23.98	4.80	30	Pass	
HE20	MCS0	2	140	5700	Full	0.07	0.09	15.81	16.26	19.05	23.98	23.98	4.80	30	Pass	
HE40	MCS0	2	102	5510	Full	0.17	0.17	18.93	19.33	22.15	23.98	23.98	4.80	30	Pass	
HE40	MCS0	2	110	5550	Full	0.17	0.17	20.60	21.01	23.82	23.98	23.98	4.80	30	Pass	
HE40	MCS0	2	134	5670	Full	0.17	0.17	19.96	20.25	23.12	23.98	23.98	4.80	30	Pass	
HE80	MCS0	2	106	5530	Full	0.35	0.35	19.31	19.73	22.54	23.98	23.98	4.80	30	Pass	
HE80	MCS0	2	122	5610	Full	0.35	0.35	20.59	21.21	23.92	23.98	23.98	4.80	30	Pass	
HE160	MCS0	2	114	5570	Full	0.55	0.53	18.00	18.89	21.48	23.98	23.98	4.80	30	Pass	


**TEST RESULTS DATA**  
**Power Spectral Density**

U-NII-2C MIMO															
Mod.	Data Rate	N <sub>Tx</sub>	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	100	5500	Full	0.07	0.09			9.32	9.53	7.47		Pass	
HE20	MCS0	2	116	5580	Full	0.07	0.09			9.10	9.53	7.47		Pass	
HE20	MCS0	2	140	5700	Full	0.07	0.09			6.82	9.53	7.47		Pass	
HE40	MCS0	2	102	5510	Full	0.17	0.17			7.40	9.53	7.47		Pass	
HE40	MCS0	2	110	5550	Full	0.17	0.17			9.07	9.53	7.47		Pass	
HE40	MCS0	2	134	5670	Full	0.17	0.17			8.11	9.53	7.47		Pass	
HE80	MCS0	2	106	5530	Full	0.35	0.35			5.24	9.53	7.47		Pass	
HE80	MCS0	2	122	5610	Full	0.35	0.35			6.42	9.53	7.47		Pass	
HE160	MCS0	2	114	5570	Full	0.55	0.53			0.95	9.53	7.47		Pass	



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

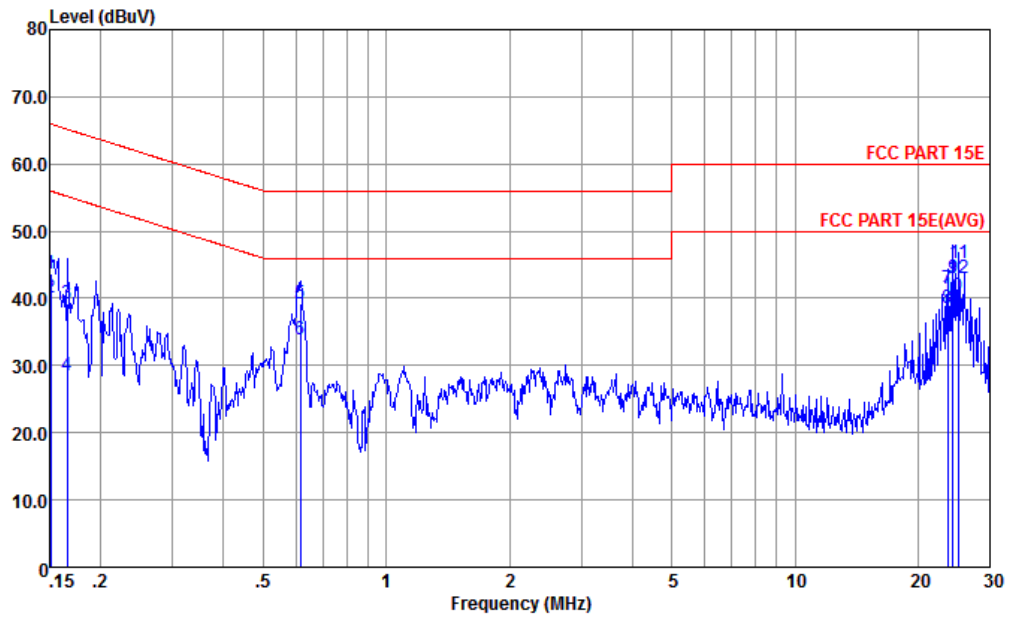


Site : CO01-KS  
 Condition : FCC PART 15E LISN-060105-L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.151	43.70	-22.26	65.96	33.20	0.02	10.48	QP
2	0.151	40.20	-15.76	55.96	29.70	0.02	10.48	Average
3	0.166	39.27	-25.89	65.16	28.80	0.03	10.44	QP
4	0.166	28.57	-26.59	55.16	18.10	0.03	10.44	Average
5	0.617	39.24	-16.76	56.00	28.89	0.11	10.24	QP
6	0.617	33.84	-12.16	46.00	23.49	0.11	10.24	Average
7	23.636	41.37	-18.63	60.00	30.20	0.62	10.55	QP
8	23.636	38.47	-11.53	50.00	27.30	0.62	10.55	Average
9	24.400	43.11	-16.89	60.00	31.91	0.64	10.56	QP
10	24.400	40.31	-9.69	50.00	29.11	0.64	10.56	Average
11	25.188	45.33	-14.67	60.00	34.10	0.66	10.57	QP
12 *	25.188	43.03	-6.97	50.00	31.80	0.66	10.57	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

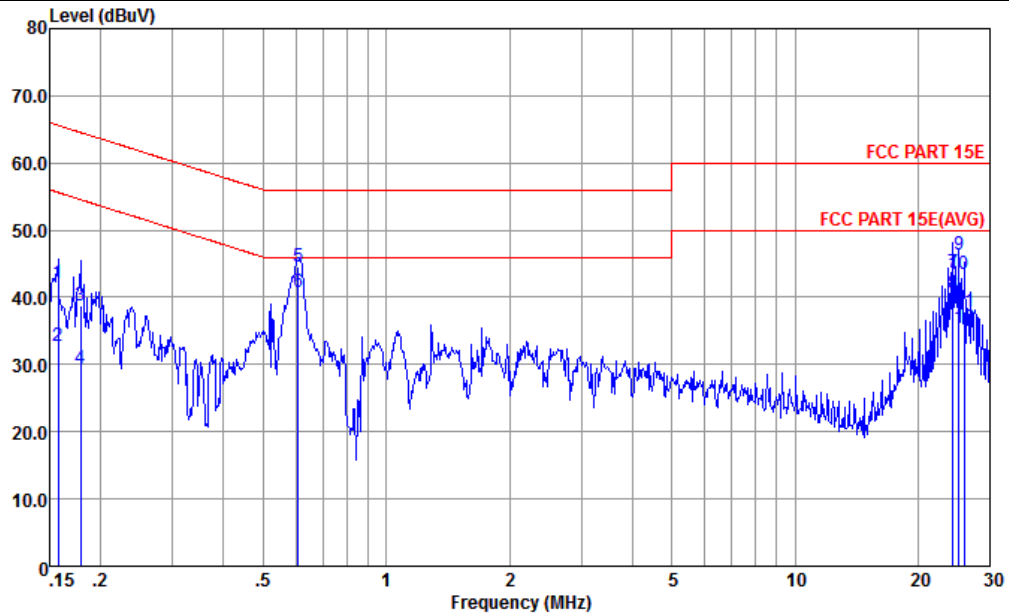

Site : CO01-KS  
 Condition : FCC PART 15E LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.157	42.07	-23.53	65.60	31.50	0.11	10.46	QP
2	0.157	32.77	-22.83	55.60	22.20	0.11	10.46	Average
3	0.179	38.71	-25.84	64.55	28.20	0.10	10.41	QP
4	0.179	29.31	-25.24	54.55	18.80	0.10	10.41	Average
5	0.608	44.55	-11.45	56.00	34.20	0.11	10.24	QP
6 *	0.608	40.75	-5.25	46.00	30.40	0.11	10.24	Average
7	24.400	43.74	-16.26	60.00	32.51	0.67	10.56	QP
8	24.400	40.54	-9.46	50.00	29.31	0.67	10.56	Average
9	25.188	46.36	-13.64	60.00	35.10	0.69	10.57	QP
10	25.188	43.36	-6.64	50.00	32.10	0.69	10.57	Average
11	26.001	37.90	-22.10	60.00	26.60	0.72	10.58	QP
12	26.001	35.40	-14.60	50.00	24.10	0.72	10.58	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)





### Appendix C. Radiated Spurious Emission

#### U-NII-1 - 5150~5250MHz

#### WIFI 802.11ax HE80 Full (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
CDD 2*2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11ax HE80 Full CH 42 5210MHz		5147.68	57.27	-16.73	74	48.37	35.03	10.6	36.73	257	280	P	H
		5149.44	46.55	-7.45	54	37.65	35.03	10.6	36.73	257	280	A	H
		5224	102.13	-	-	93.03	35.09	10.67	36.66	257	280	P	H
		5224	93.38	-	-	84.28	35.09	10.67	36.66	257	280	A	H
		5387.94	52.55	-21.45	74	43.01	35.26	10.77	36.49	257	280	P	H
		5351.94	42.8	-11.2	54	33.35	35.22	10.75	36.52	257	280	A	H
		5148.16	65.1	-8.9	74	56.2	35.03	10.6	36.73	163	348	P	V
		5139.84	53.07	-0.93	54	44.17	35.03	10.6	36.73	163	348	A	V
		5200	110.65	-	-	101.59	35.08	10.66	36.68	163	348	P	V
		5200	101.19	-	-	92.13	35.08	10.66	36.68	163	348	A	V
		5357.16	57.78	-16.22	74	48.33	35.22	10.75	36.52	163	348	P	V
	5353.38	48.17	-5.83	54	38.72	35.22	10.75	36.52	163	348	A	V	
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



U-NII-1 5150~5250MHz

WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI Ant. CDD 2*2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full		10421	45.89	-22.41	68.3	59.03	38.34	15.51	66.99	300	0	P	H
CH 42 5210MHz		10421	46.55	-21.75	68.3	59.69	38.34	15.51	66.99	100	0	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2A - 5250~5350MHz

WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI Ant. CDD 2*2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ax HE20 Full CH 64 5320MHz		5354.9	62.37	-11.63	74	52.92	35.22	10.75	36.52	287	305	P	H
		5350.8	47.83	-6.17	54	38.38	35.22	10.75	36.52	287	305	A	H
		5320	109.78	-	-	100.42	35.19	10.73	36.56	287	305	P	H
		5320	101.52	-	-	92.16	35.19	10.73	36.56	287	305	A	H
		5351.8	68.01	-5.99	74	58.56	35.22	10.75	36.52	100	13	P	V
		5350.1	53.43	-0.57	54	43.98	35.22	10.75	36.52	100	13	A	V
		5320	114.29	-	-	104.93	35.19	10.73	36.56	100	13	P	V
		5320	106.24	-	-	96.88	35.19	10.73	36.56	100	13	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2A 5250~5350MHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI Ant. CDD 2*2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full		10641	47.89	-26.11	74	60.6	38.41	15.7	66.82	300	0	P	H
CH 64 5320MHz		10641	49.09	-24.91	74	61.8	38.41	15.7	66.82	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - 5470~5725MHz

WIFI 802.11ax HE40 Full (Band Edge @ 3m)

WIFI Ant. CDD 2*2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 102 5510MHz		5458.48	59.18	-14.82	74	49.43	35.32	10.85	36.42	272	301	P	H
		5467.44	60.99	-7.31	68.3	51.2	35.34	10.85	36.4	272	301	P	H
		5456.56	46.69	-7.31	54	36.94	35.32	10.85	36.42	272	301	A	H
		5506	106.28	-	-	96.39	35.37	10.89	36.37	272	301	P	H
		5506	98.42	-	-	88.53	35.37	10.89	36.37	272	301	A	H
		5727.64	51.66	-16.64	68.3	41.43	35.65	11.18	36.6	272	301	P	H
		5459.44	66.63	-7.37	74	56.88	35.32	10.85	36.42	103	57	P	V
		5465.04	68.03	-0.27	68.3	58.24	35.34	10.85	36.4	103	57	P	V
		5458.32	51.29	-2.71	54	41.54	35.32	10.85	36.42	103	57	A	V
		5506	111.4	-	-	101.51	35.37	10.89	36.37	103	57	P	V
		5506	103.54	-	-	93.65	35.37	10.89	36.37	103	57	A	V
		5731.16	55.37	-12.93	68.3	45.14	35.65	11.18	36.6	103	57	P	V

**Remark**

- No other spurious found.
- All results are PASS against Peak and Average limit line.



U-NII-2C 5470~5725MHz

WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI Ant. CDD 2*2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full		11015	46.09	-27.91	74	57.99	38.54	16.05	66.49	300	0	P	H
CH 102 5510MHz		11015	47.78	-26.22	74	59.68	38.54	16.05	66.49	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI 802.11ax HE160 Full (Band Edge @ 3m)

WIFI Ant. CDD 2*2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ax HE160 Full CH 114 5570MHz		5455.44	59.68	-14.32	74	49.96	35.32	10.82	36.42	264	301	P	H
		5462.96	58.51	-9.79	68.3	48.72	35.34	10.85	36.4	264	301	P	H
		5459.92	46.81	-7.19	54	37.06	35.32	10.85	36.42	264	301	A	H
		5602	99.7	-	-	89.71	35.47	11	36.48	264	301	P	H
		5602	91.26	-	-	81.27	35.47	11	36.48	264	301	A	H
		5757.32	55.54	-12.76	68.3	45.24	35.72	11.21	36.63	264	301	P	H
		5457.68	64.14	-9.86	74	54.39	35.32	10.85	36.42	105	62	P	V
		5466.96	65.19	-3.11	68.3	55.4	35.34	10.85	36.4	105	62	P	V
		5459.92	52.7	-1.3	54	42.95	35.32	10.85	36.42	105	62	A	V
		5596	105.19	-	-	95.2	35.45	11	36.46	105	62	P	V
		5596	96.32	-	-	86.33	35.45	11	36.46	105	62	A	V
		5726.28	62.91	-5.39	68.3	52.68	35.65	11.18	36.6	105	62	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2C 5470~5725MHz

WIFI 802.11ax HE160 Full (Harmonic @ 3m)

WIFI Ant. CDD 2*2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE160 Full		11136	46.54	-27.46	74	58.33	38.58	16.12	66.49	300	0	P	H
CH 114 5570MHz		11136	46.64	-27.36	74	58.43	38.58	16.12	66.49	100	0	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





Emission below 1GHz

WIFI 802.11ax HE40 Full (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
CDD 2*2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11ax HE40 Full LF		45.52	27.11	-12.89	40	42.15	16.2	0.96	32.2	-	-	P	H
		147.37	25.71	-17.79	43.5	38.84	17.2	1.78	32.11	-	-	P	H
		502.39	29.6	-16.4	46	35.06	23.8	3.14	32.4	-	-	P	H
		527.61	32.51	-13.49	46	37.79	23.9	3.17	32.35	-	-	P	H
		841.89	28.92	-17.08	46	28.31	28.74	4.25	32.38	-	-	P	H
		897.18	30.63	-15.37	46	29.47	28.9	4.47	32.21	-	-	P	H
		46.49	36.59	-3.41	40	51.93	15.9	0.96	32.2	-	-	P	V
		60.07	28.15	-11.85	40	47.38	11.8	1.07	32.1	-	-	P	V
		127	25.94	-17.56	43.5	38.92	17.5	1.67	32.15	-	-	P	V
		534.4	30.64	-15.36	46	35.9	23.9	3.17	32.33	-	-	P	V
		561.56	30.61	-15.39	46	33.58	26.03	3.3	32.3	-	-	P	V
		829.28	28.32	-17.68	46	28.37	28.06	4.25	32.36	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
CDD 2*2		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
802.11b CH 01 2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix D. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1+2	802.11a	95.27	2.071	0.483	0.51kHz
1+2	802.11ax HE20	98.37	-	-	10Hz
1+2	802.11ax HE40	96.07	0.780	1.283	1.3kHz
1+2	802.11ax HE80	92.21	0.412	2.430	2.7kHz
1+2	802.11ax HE160	88.11	0.236	4.237	4.3KHz

### 802.11a

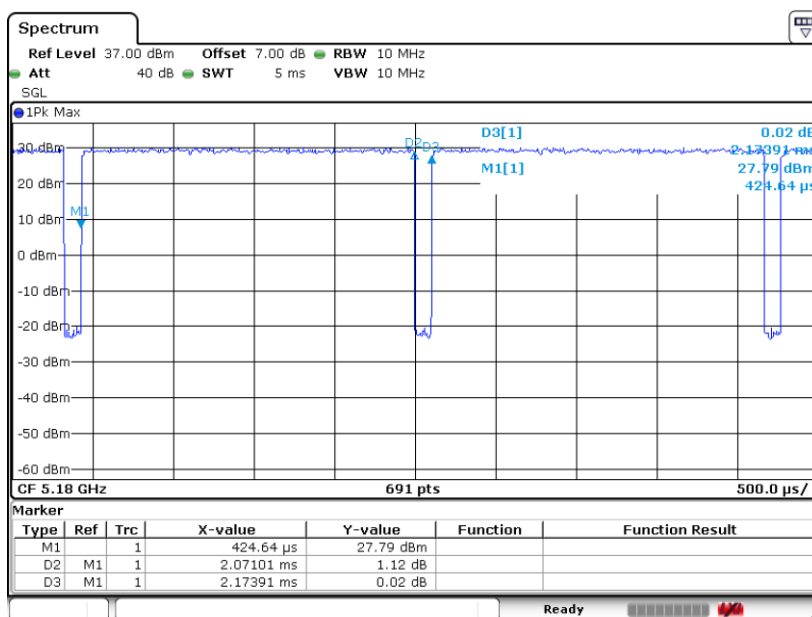




802.11ax HE20

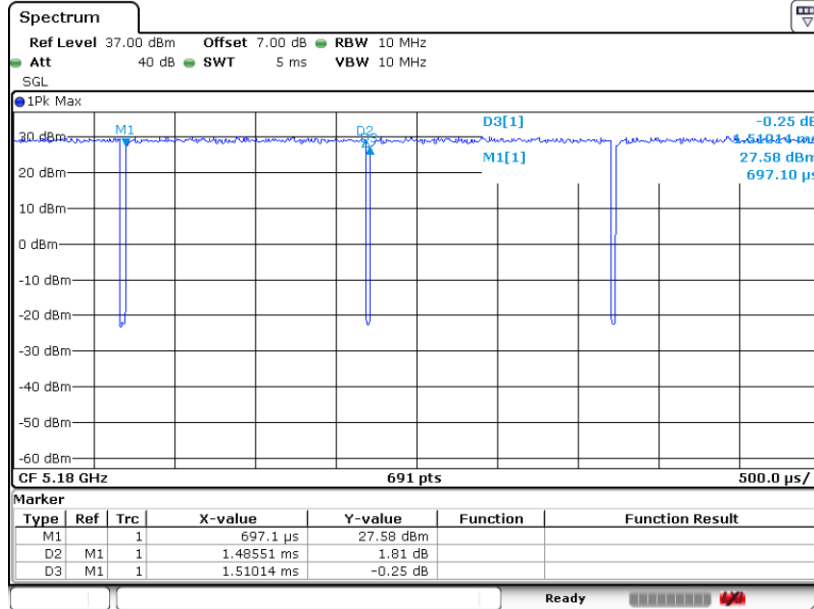


802.11ax HE40

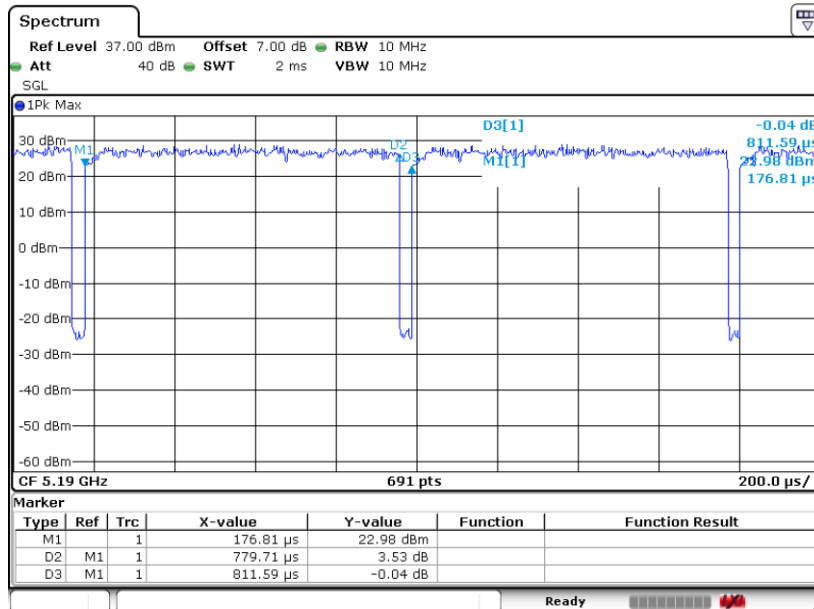



802.11ax HE80

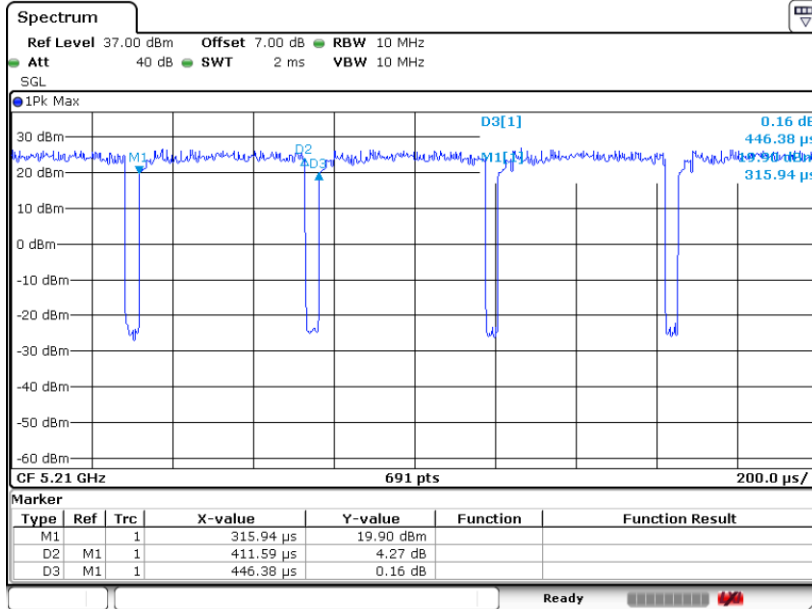

802.11ax HE160

