

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-199-RWD-037

AGR No. : A197A-116

Applicant : BITFINDER, INC.

Address : 40 boardman pl, 2F, San Francisco, California, 94103, United States

Manufacturer : BITFINDER, INC.

Address : 13F WeWork, 343 Samil-daero, Jung-Gu, Seoul, Republic of Korea

Type of Equipment : AWAIR ELEMENT

FCC ID. : 2AF65AWAIR0HD3E

Model Name : AWAIR Rev3E

Serial number : N/A

Total page of Report : 34 pages (including this page)

Date of Incoming : August 02, 2019

Date of issue : September 24, 2019

SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*

This test report only contains the result of a single test of the sample supplied for the examination.


It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:



Tae-Ho, Kim / Senior Manager
ONETECH Corp.

Approved by:

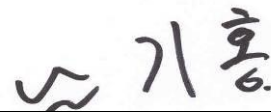

Ki-Hong, Nam / Chief Engineer
ONETECH Corp.

CONTENTS**PAGE**

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY.....	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	7
4. EUT MODIFICATIONS.....	7
5. SYSTEM TEST CONFIGURATION	8
5.1 JUSTIFICATION.....	8
5.2 PERIPHERAL EQUIPMENT	8
5.3 MODE OF OPERATION DURING THE TEST	8
5.4 CONFIGURATION OF TEST SYSTEM.....	10
5.5 ANTENNA REQUIREMENT	10
6. PRELIMINARY TEST	11
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	11
6.2 GENERAL RADIATED EMISSIONS TESTS	11
7. MINIMUM 6 DB BANDWIDTH.....	12
7.1 OPERATING ENVIRONMENT	12
7.2 TEST SET-UP	12
7.3 TEST EQUIPMENT USED.....	12
7.4 TEST DATA.....	13
8. MAXIMUM PEAK OUTPUT POWER.....	15
8.1 OPERATING ENVIRONMENT	15
8.2 TEST SET-UP	15
8.3 TEST EQUIPMENT USED.....	15
8.4 TEST DATA.....	16
9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	18

9.1 OPERATING ENVIRONMENT	18
9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	18
9.3 TEST SET-UP FOR RADIATED MEASUREMENT	18
9.4 TEST EQUIPMENT USED	18
9.5 TEST DATA FOR CONDUCTED EMISSION	19
9.6 TEST DATA FOR RADIATED EMISSION	24
<i>9.6.1 Radiated Emission which fall in the Restricted Band</i>	24
10. PEAK POWER SPECTRAL DENSITY	26
10.1 OPERATING ENVIRONMENT	26
10.2 TEST SET-UP	26
10.3 TEST EQUIPMENT USED	26
10.4 TEST DATA	27
11. RADIATED EMISSION TEST	29
11.1 OPERATING ENVIRONMENT	29
11.2 TEST SET-UP	29
11.3 TEST EQUIPMENT USED	29
11.4 TEST DATA	30
<i>11.4.1 Test data for 30 MHz ~ 1 GHz</i>	30
<i>11.4.2 Test data for Below 30 MHz</i>	31
<i>11.4.3 Test data for above 1 GHz</i>	31
12. CONDUCTED EMISSION TEST	32
12.1 OPERATING ENVIRONMENT	32
12.2 TEST SET-UP	32
12.3 TEST EQUIPMENT USED	32
12.4 TEST DATA	33

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-199-RWD-037	September 24, 2019	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : BITFINDER, INC.
 Address : 40 boardman pl, 2F, San Francisco, California, 94103, United States
 Contact Person : Kevin, Cho / CTO
 Telephone No. : 408-930-9235
 FCC ID : 2AF65AWAIR0HD3E
 Model Name : AWAIR Rev3E
 Brand Name : -
 Serial Number : N/A
 Date : September 24, 2019

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	AWAIR ELEMENT
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The BITFINDER, INC., Model AWAIR Rev3E (referred to as the EUT in this report) is an AWAIR ELEMENT, Product specification information described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	AWAIR ELEMENT	
Temperature Range	-10 °C ~ 50 °C	
OPERATING FREQUENCY	Bluetooth LE	2 402 MHz ~ 2 480 MHz
	WLAN 2.4 GHz	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))
MODULATION TYPE	Bluetooth LE	GFSK
	WLAN 2.4 GHz	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK) 802.11g/n(HT20): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
RF OUTPUT POWER	Bluetooth LE	-1.05 dBm
	WLAN 2.4 GHz	7.51 dBm(802.11b) 10.75 dBm(802.11g) 9.78 dBm(802.11n_HT20)
ANTENNA TYPE	PCB Antenna	
ANTENNA GAIN	5.049 dBi	
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	26 MHz, 37.4 MHz	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	BITFINDER, INC.	AWAIR-LITE-MAIN-V2.0	N/A
Sub Board	BITFINDER, INC.	N/A	N/A
LED Board	BITFINDER, INC.	AWAIR-R2-LED-V4.0	N/A
Air Sensor	Honeywell	HPMA 115S0-XXX	N/A
Lithium Battery	N/A	CR2032	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
AWAIR Rev3E	BITFINDER, INC.	AWAIR ELEMENT(EUT)	-
AWAIR Debugger V2.0	Bitfinder, Inc.	Jig Board	EUT / Notebook PC
ST-LINK/V2	STMicroelectronics	Jig Board	EUT / Notebook PC
Ideapad 100-15IBD	LENOVO	Notebook PC	Jig Board

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 440 MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XZ” axis, but the worst data was recorded in this report.


-. Duty Cycle

Mode	Duty Cycle [%]
Bluetooth LE	100.00

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : $10 * \log(1 / (\text{Duty Cycle} / 100))$

-. Test Plot

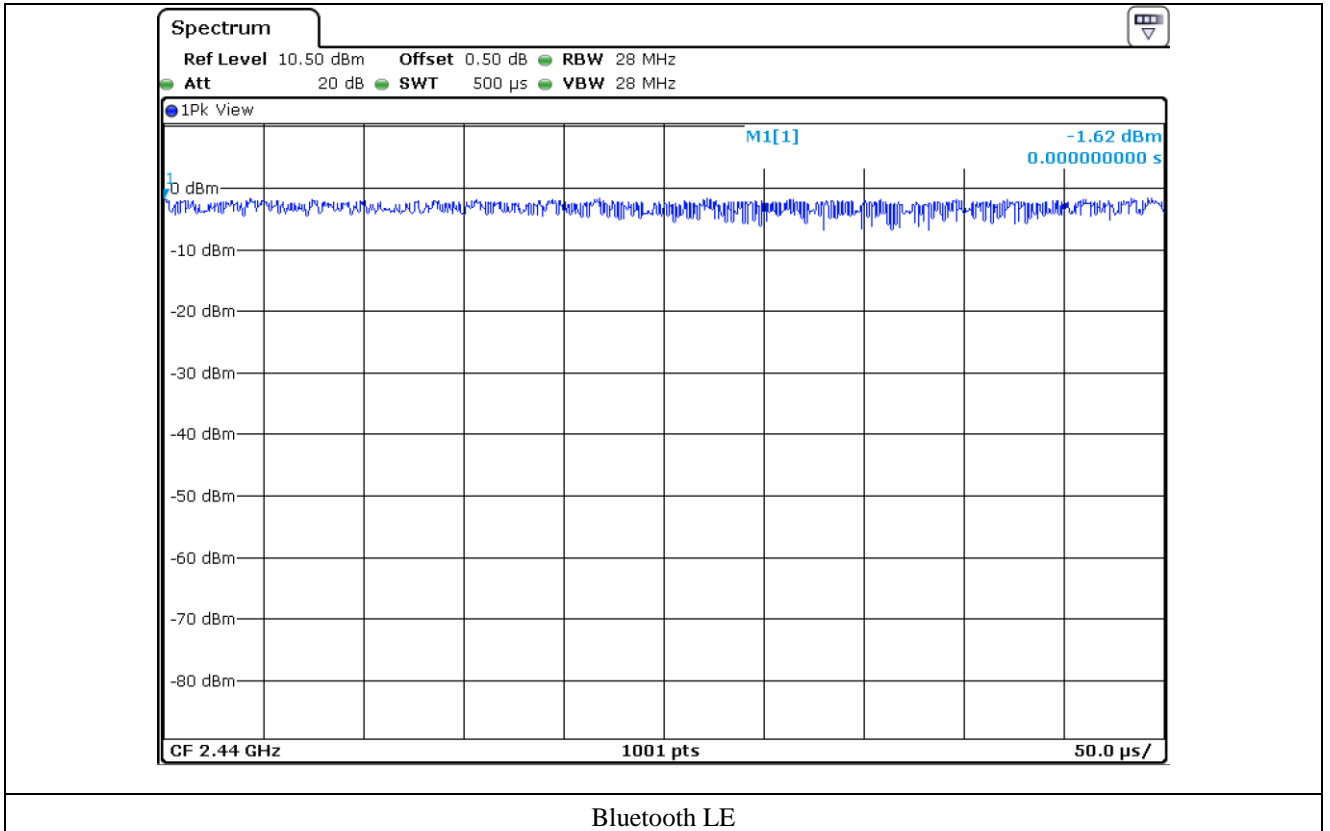

Bluetooth LE

5.4 Configuration of Test System

Line Conducted Test: The EUT was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is PCB Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

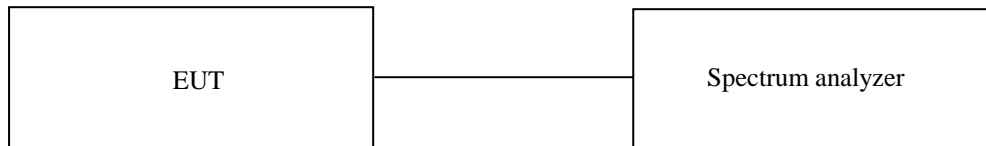

7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

7.4 Test data


- Test Date : August 08, 2019 ~ August 16, 2019
- Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2 402.00	1 078.90	500.00	578.90
Middle	2 440.00	1 083.90	500.00	583.90
High	2 480.00	1 083.90	500.00	583.90

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Assistant Manager

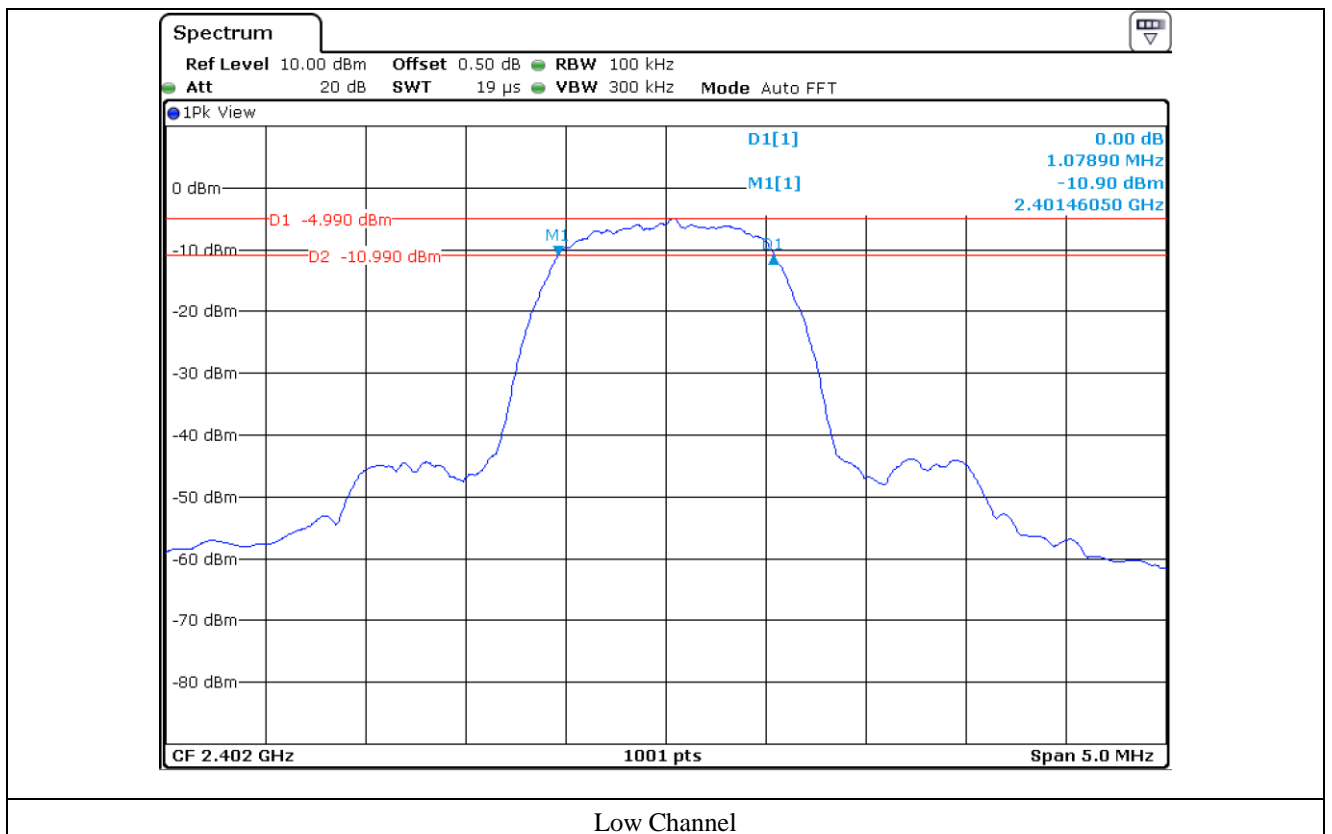

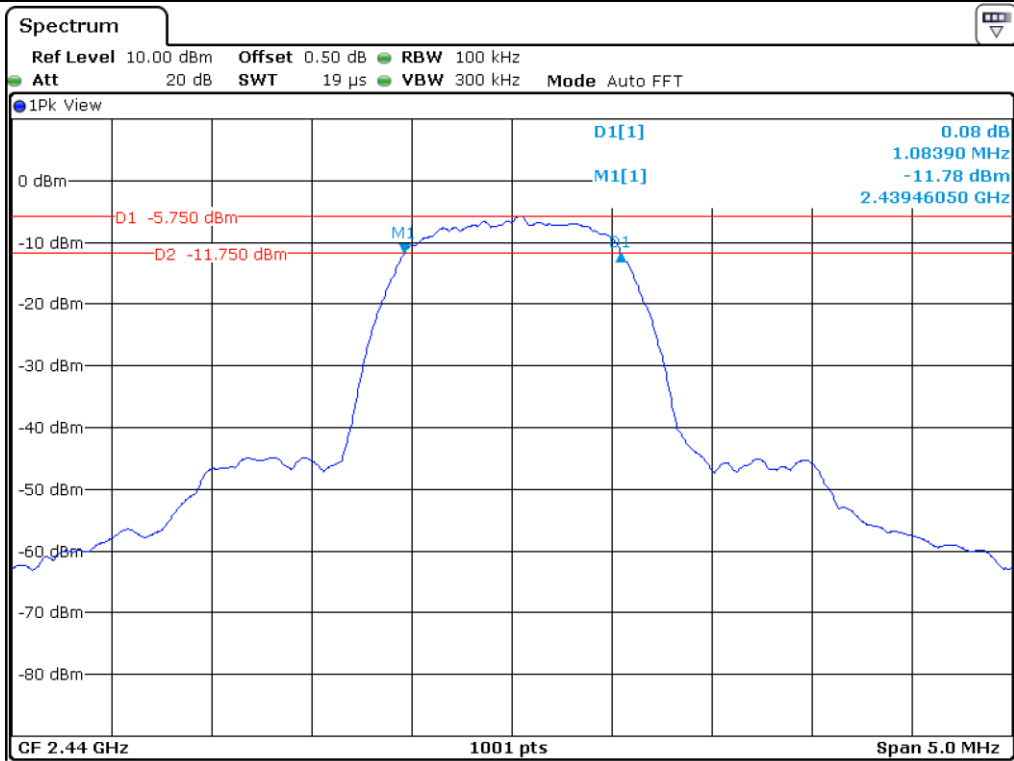

Middle Channel

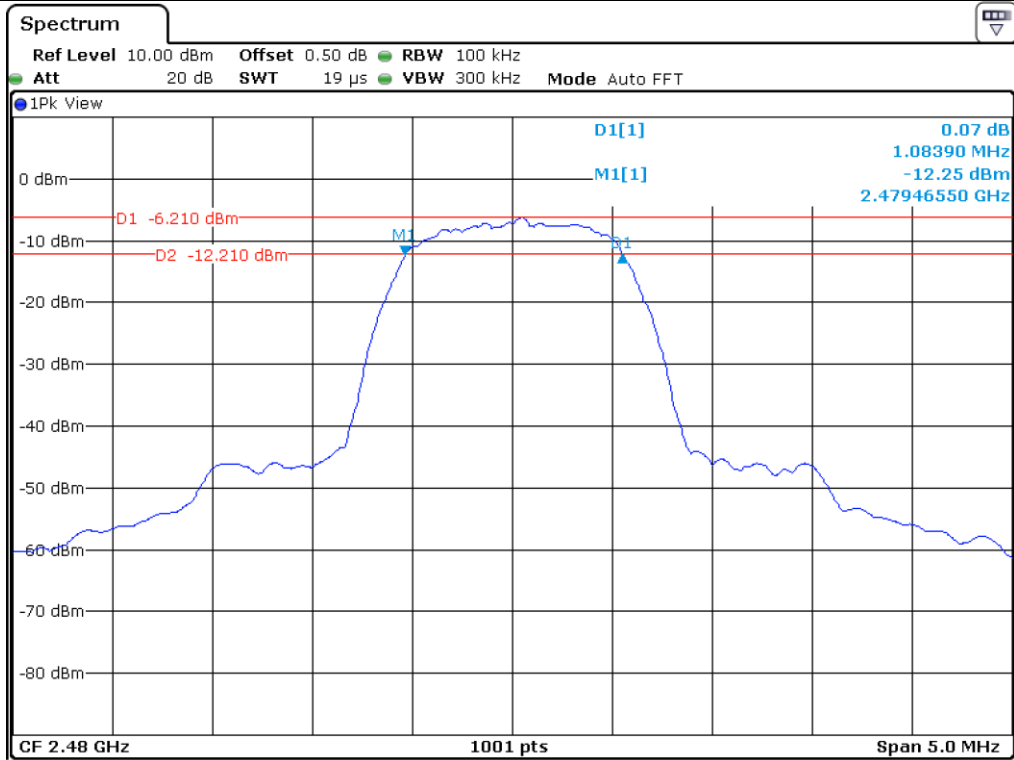

High Channel

8. MAXIMUM PEAK OUTPUT POWER


8.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to \geq DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

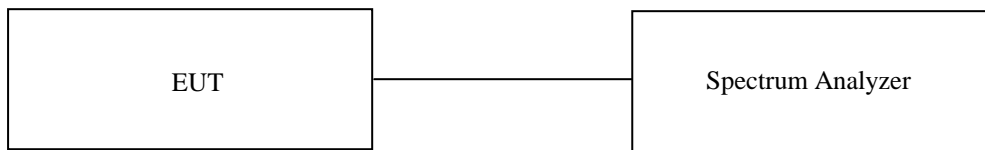

8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.


8.4 Test data


- Test Date : August 08, 2019 ~ August 16, 2019
- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	-1.05	30.00	31.05
MIDDLE	2 440.00	-1.89	30.00	31.89
HIGH	2 480.00	-2.36	30.00	32.36


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Tested by: Hyung-Kwon, Oh / Assistant Manager

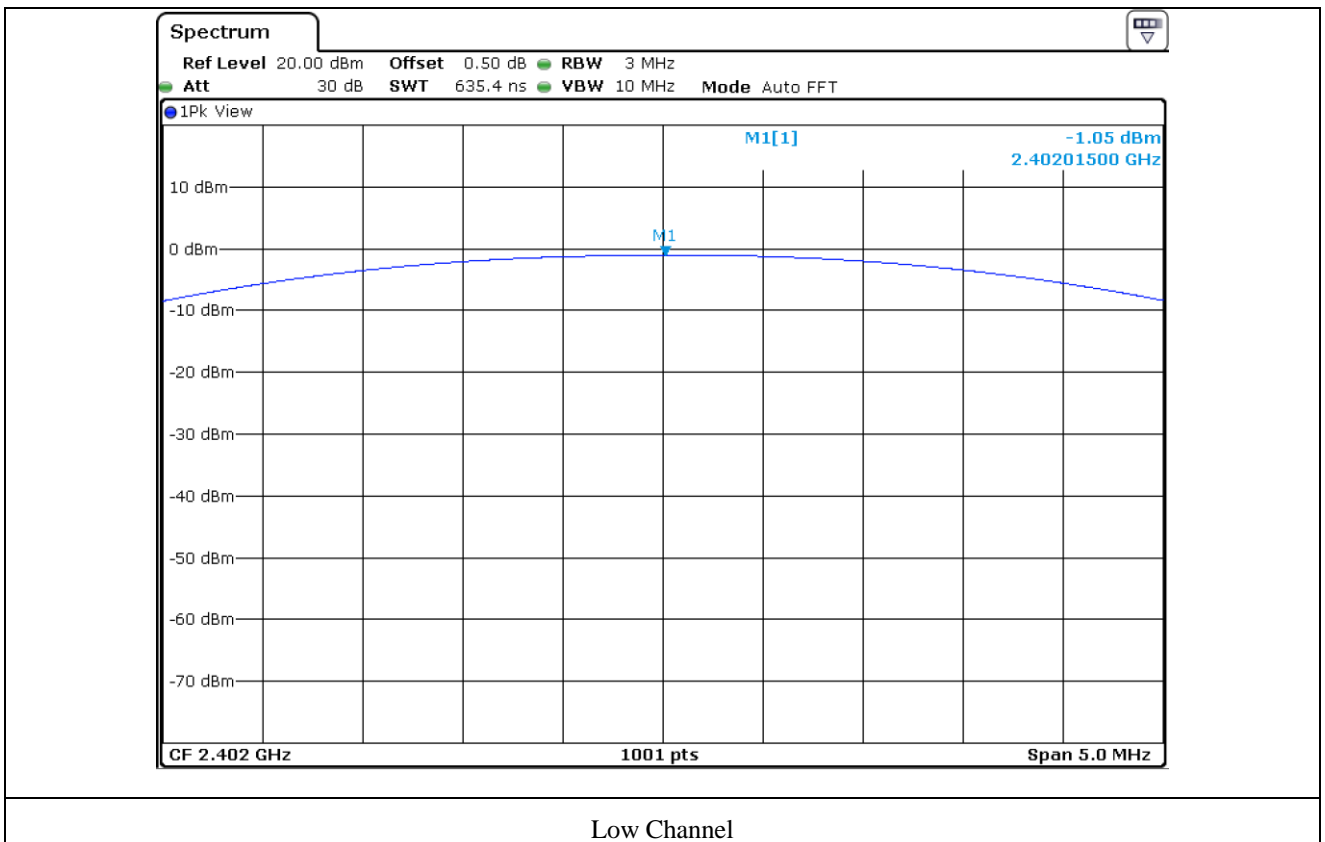

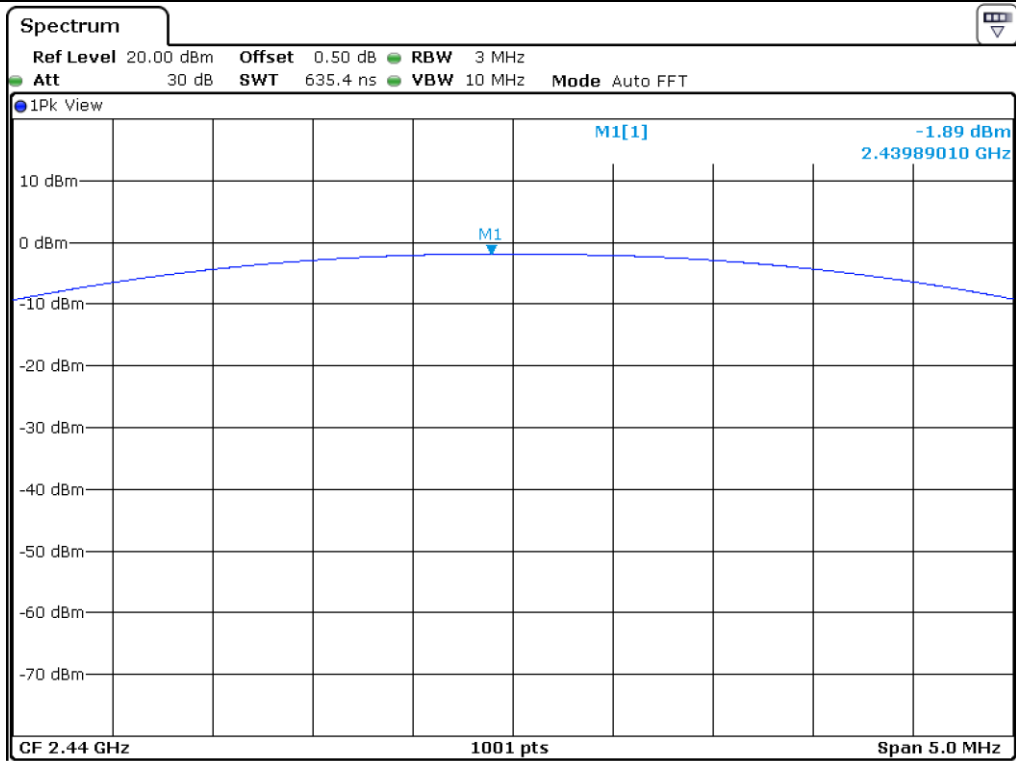

Middle Channel

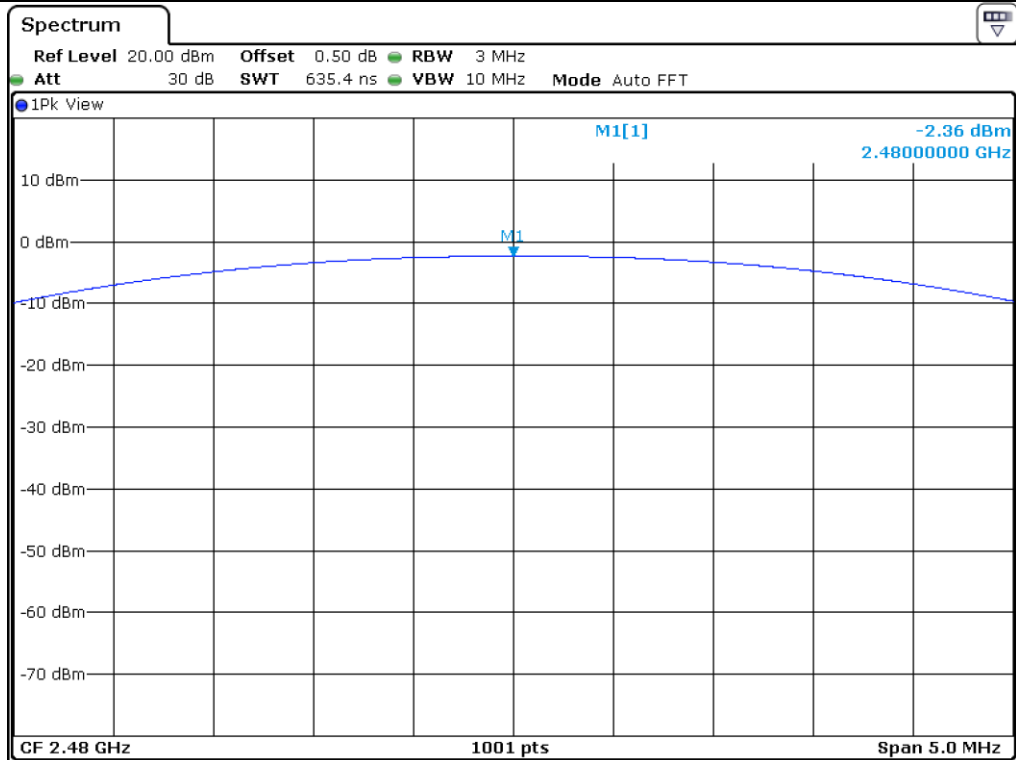

High Channel


9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, the video bandwidth is set to 3 times the resolution bandwidth and peak detection was used.

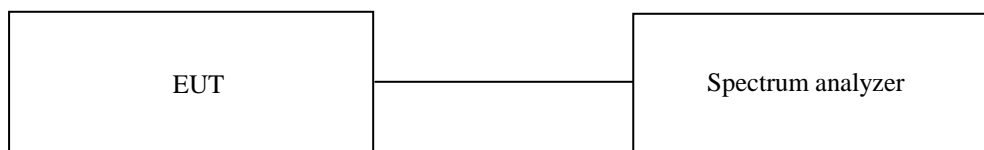

9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

9.4 Test equipment used


Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Mar. 28, 2019 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312544	Mar. 18, 2019 (1Y)
■ - BBV 9718B	Schwarzbeck	Amplifier	009	Mar. 20, 2019 (1Y)
■ - SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Mar. 11, 2019 (1Y)
■ - DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ - MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	777	Apr. 13, 2018 (2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	9120D-1366	Jul. 16, 2019 (1Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170179	Jan. 16, 2019 (1Y)
■ - VAMP9243	Schwarzbeck	ROD ANTENNA	VAMP9243	Mar. 14, 2019 (2Y)

All test equipment used is calibrated on a regular basis.


9.5 Test data for conducted emission

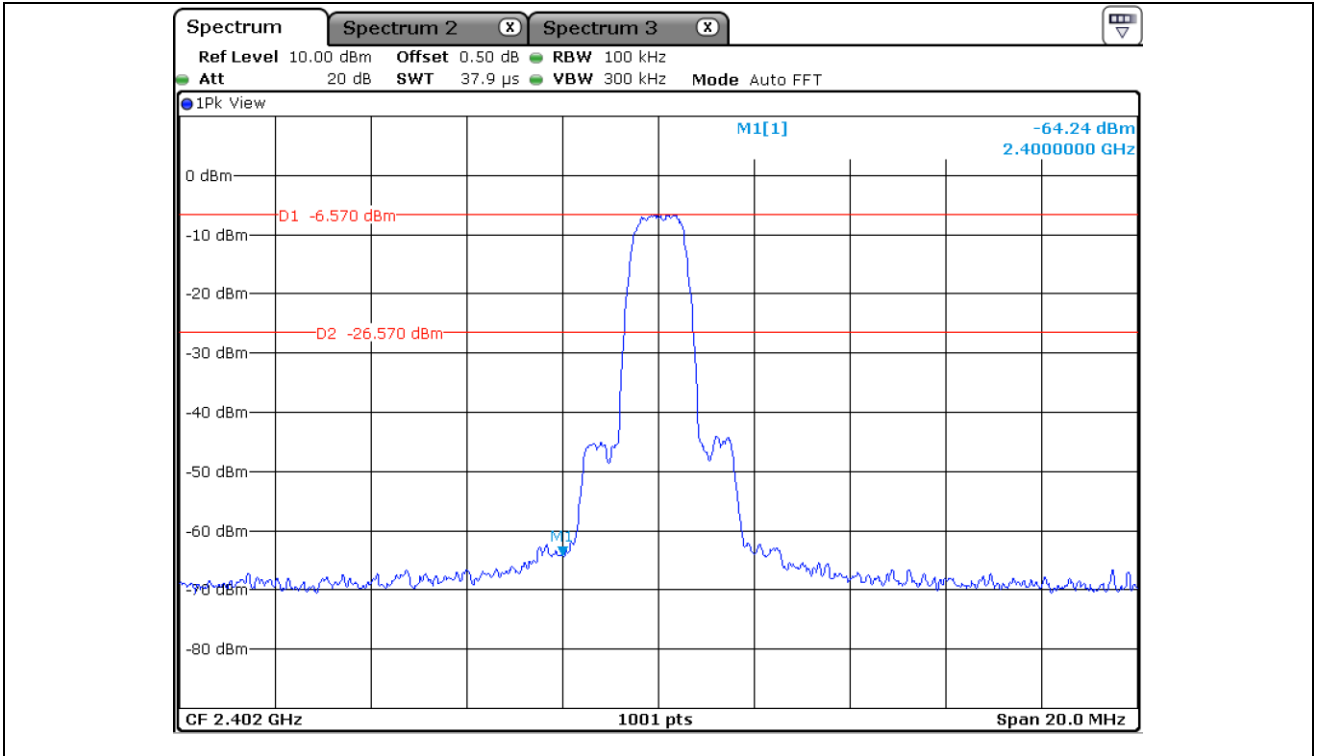


Low Channel

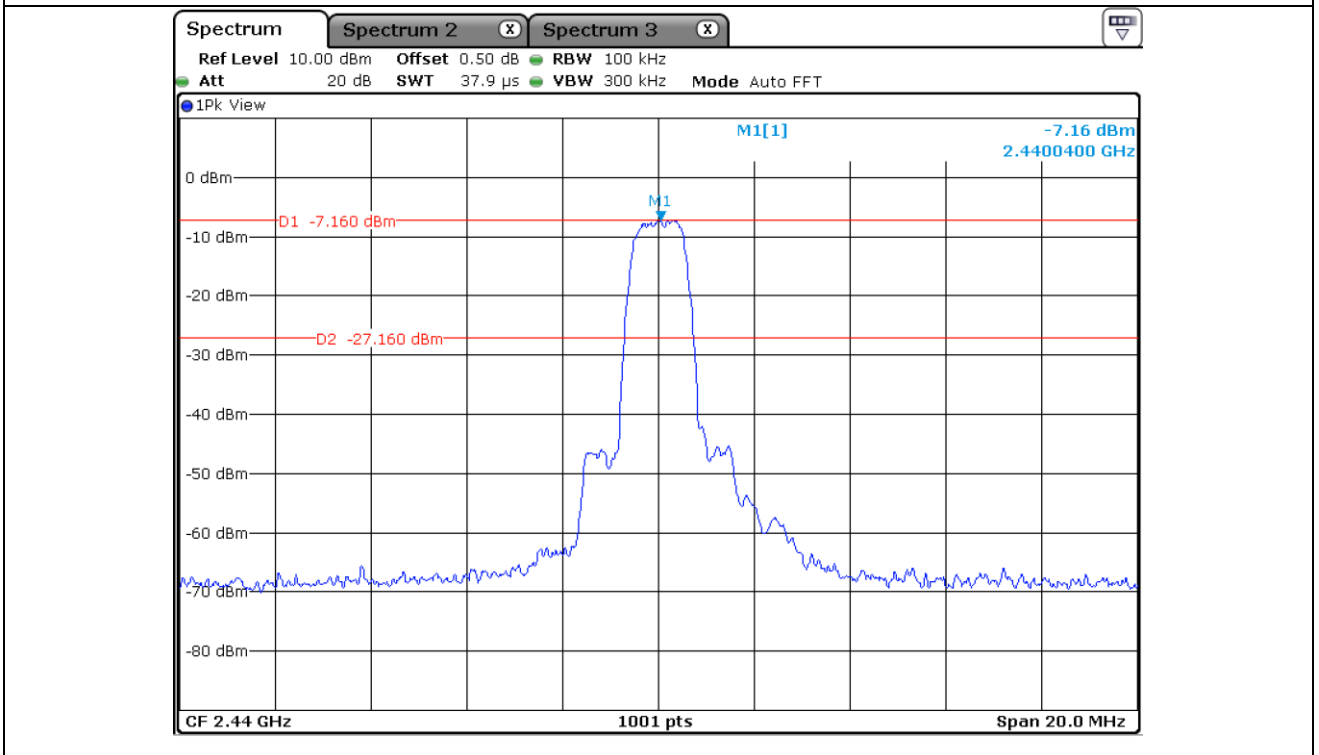


Middle Channel

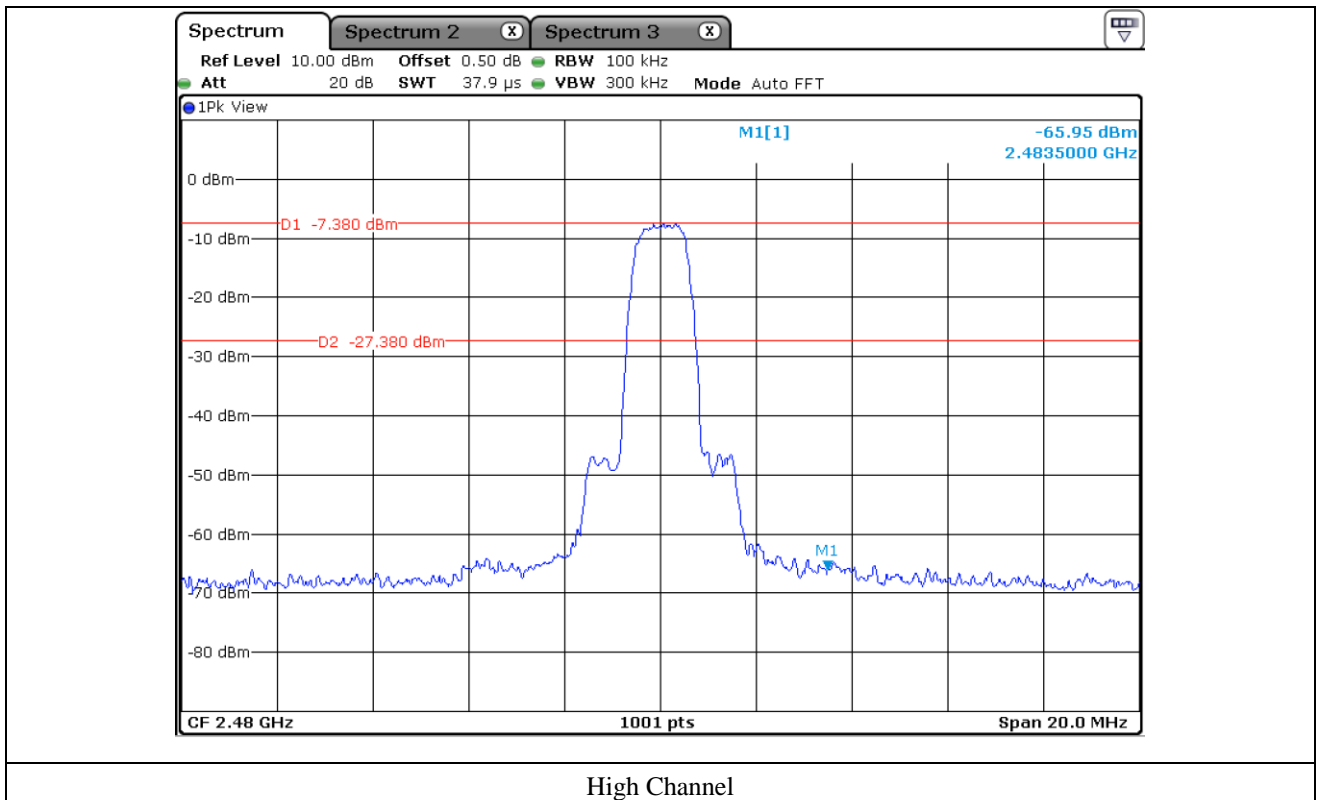


High Channel

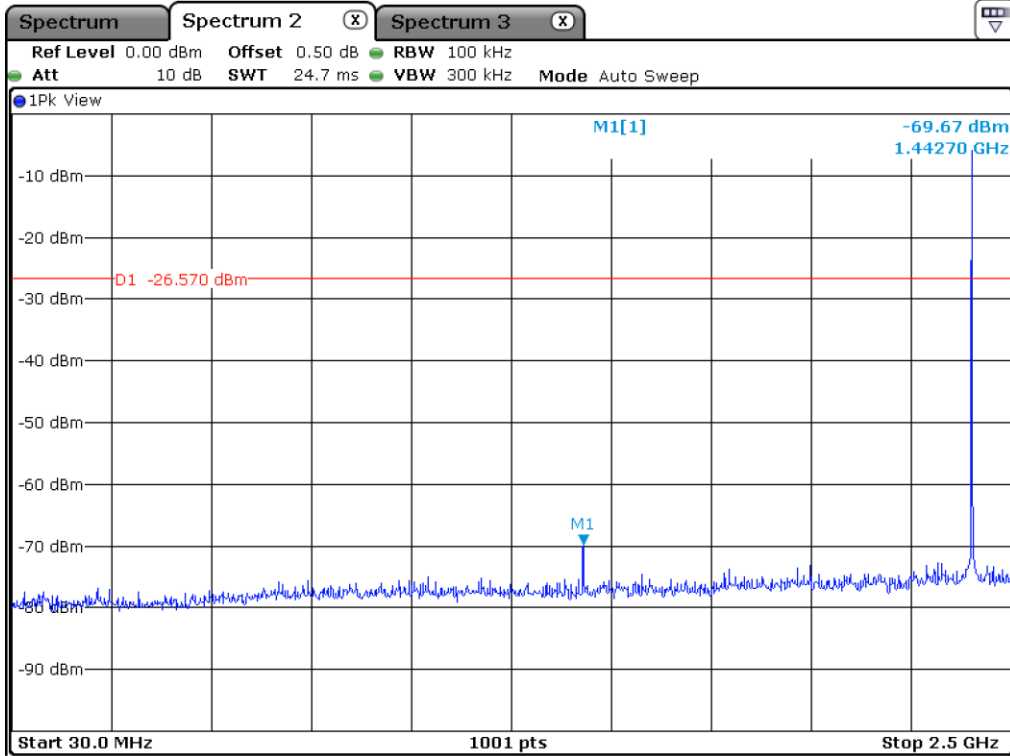


Low Channel

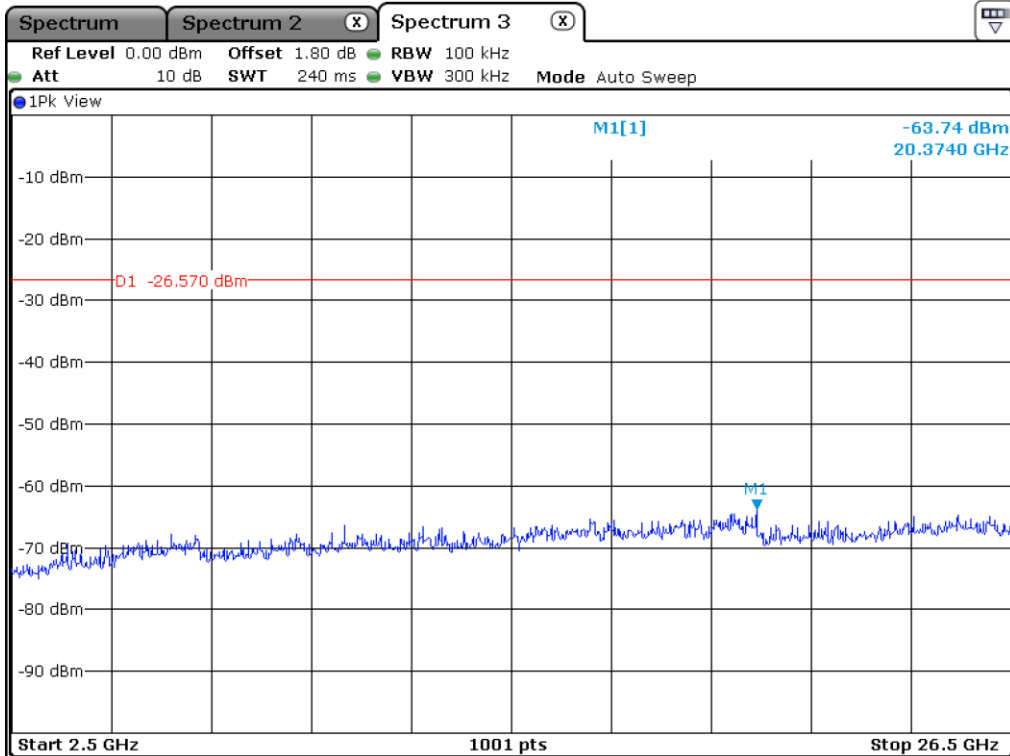


Low Channel

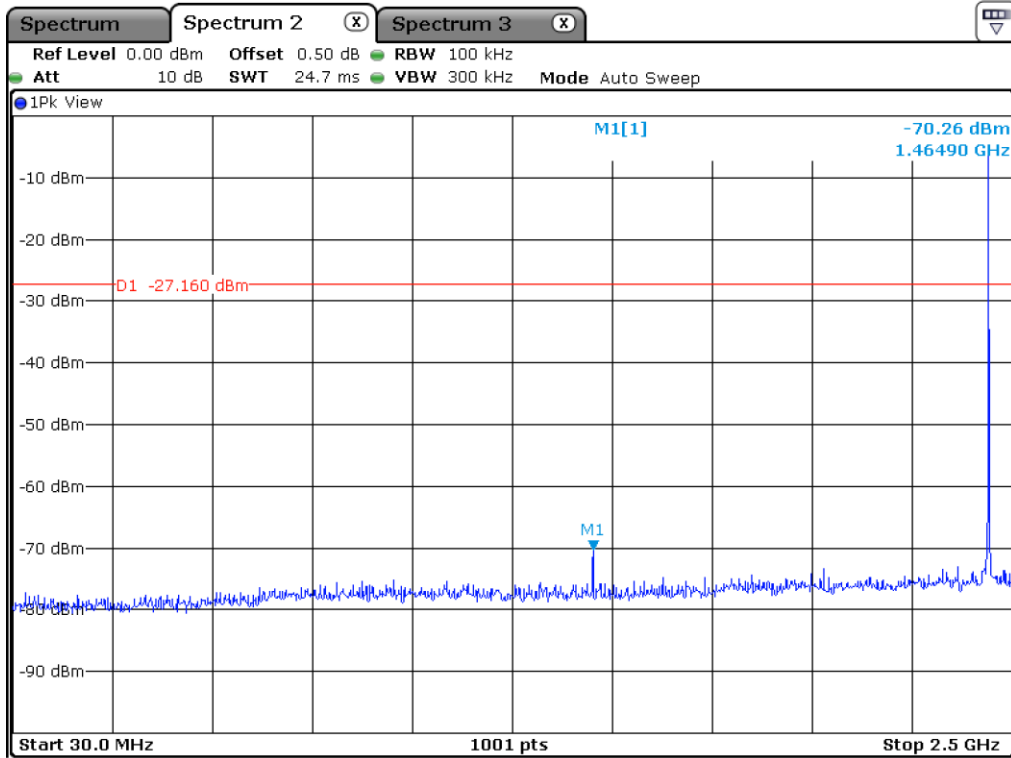


Middle Channel

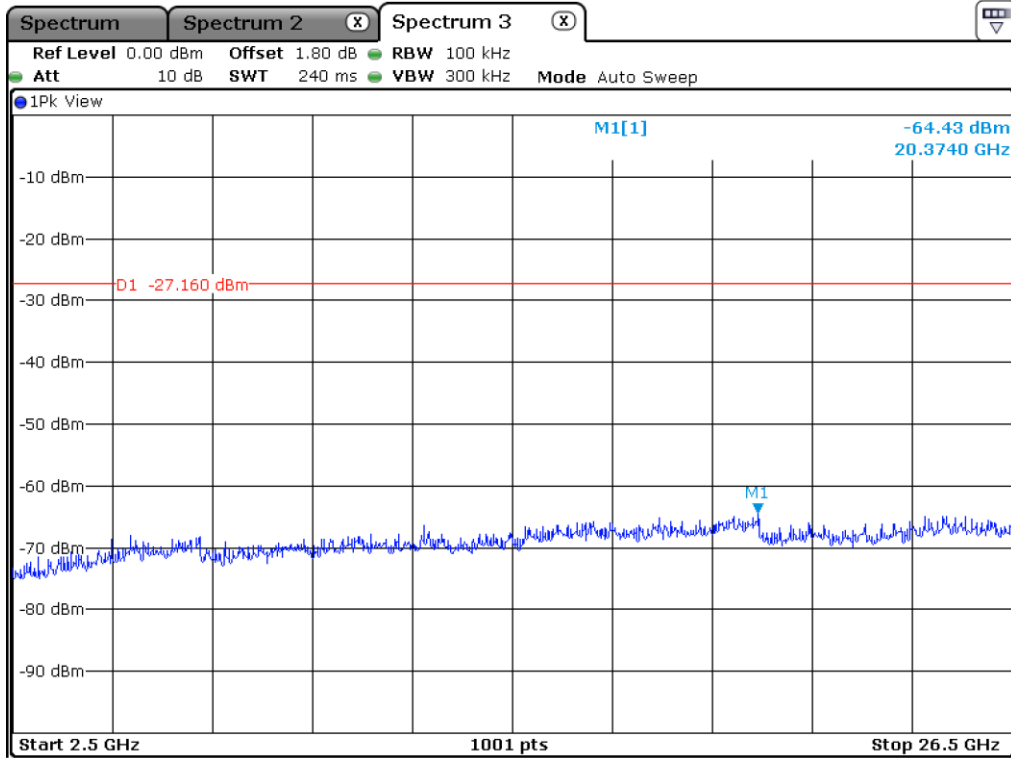

Middle Channel

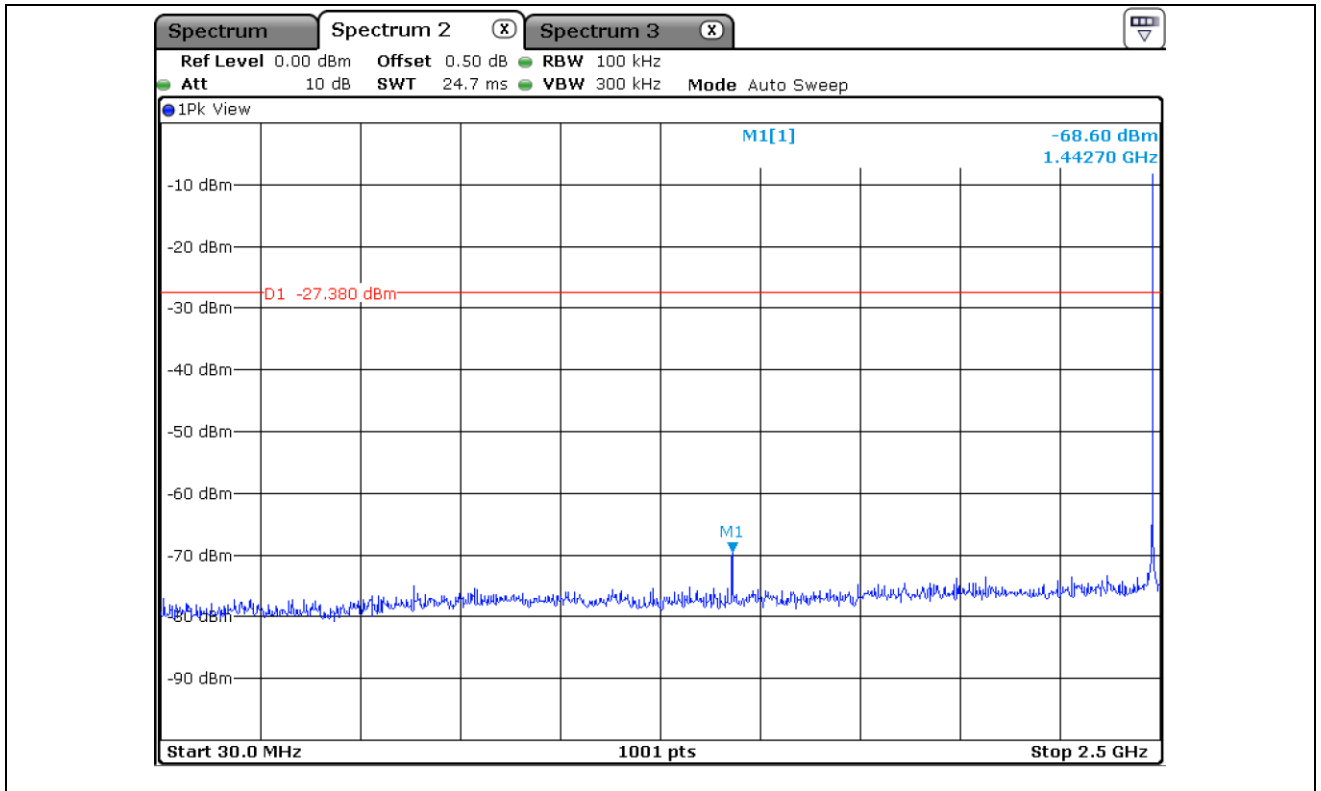

High Channel

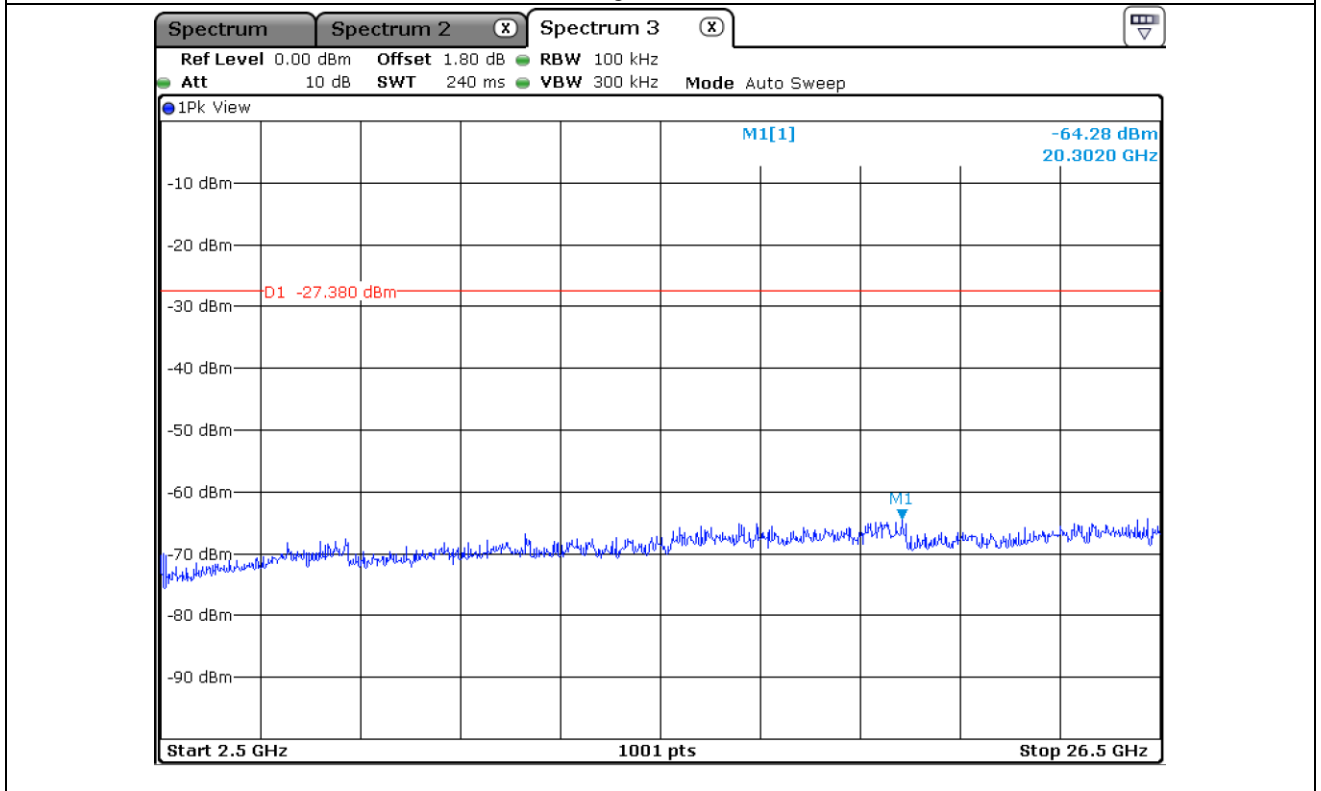

High Channel

9.6 Test data for radiated emission

9.6.1 Radiated Emission which fall in the Restricted Band

- Test Date : August 08, 2019 ~ August 16, 2019
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 100.00 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel								
2 342.965	19.17	Peak	H	26.94	4.75	50.86	74.00	23.14
2 312.982	7.08	Average	H			38.77	54.00	15.23
2 385.625	18.50	Peak	V			50.19	74.00	23.81
2 342.072	7.09	Average	V			38.78	54.00	15.22
Test Data for High Channel								
2 483.508	22.47	Peak	H	27.47	4.39	54.33	74.00	19.67
2 483.508	8.71	Average	H			40.57	54.00	13.43
2 483.508	26.50	Peak	V			58.36	74.00	15.64
2 483.508	11.24	Average	V			43.10	54.00	10.90

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss}$$



Tested by: Hyung-Kwon, Oh / Assistant Manager

9.6.2 Spurious & Harmonic Radiated Emission

- Test Date : August 08, 2019 ~ August 16, 2019
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 100.00 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel								
4 804.00	20.50	Peak	H	30.84	7.28	58.62	74.00	15.38
	9.90	Average	H			48.02	54.00	5.98
	21.17	Peak	V			59.29	74.00	14.71
	8.09	Average	V			46.21	54.00	7.79
Test Data for Middle Channel								
4 880.00	21.55	Peak	H	30.01	7.42	58.98	74.00	15.02
	8.69	Average	H			46.12	54.00	7.88
	20.45	Peak	V			57.88	74.00	16.12
	8.44	Average	V			45.87	54.00	8.13
Test Data for High Channel								
4 960.00	20.14	Peak	H	31.15	7.40	58.69	74.00	15.31
	9.42	Average	H			47.97	54.00	6.03
	20.05	Peak	V			58.60	74.00	15.40
	9.66	Average	V			48.21	54.00	5.79

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss}$$



Tested by: Hyung-Kwon, Oh / Assistant Manager

10. PEAK POWER SPECTRAL DENSITY


10.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$, the video bandwidth is set to 3 times the resolution bandwidth.

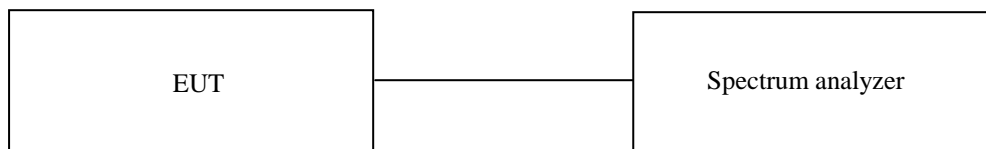

10.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.


10.4 Test data


- Test Date : August 08, 2019 ~ August 16, 2019
- Test Result : Pass
- Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 402.00	-19.23	8.00	27.23
Middle	2 440.00	-19.97	8.00	27.97
High	2 480.00	-20.44	8.00	28.44


Remark. Margin = Limit – Measured value

Tested by: Hyung-Kwon, Oh / Assistant Manager

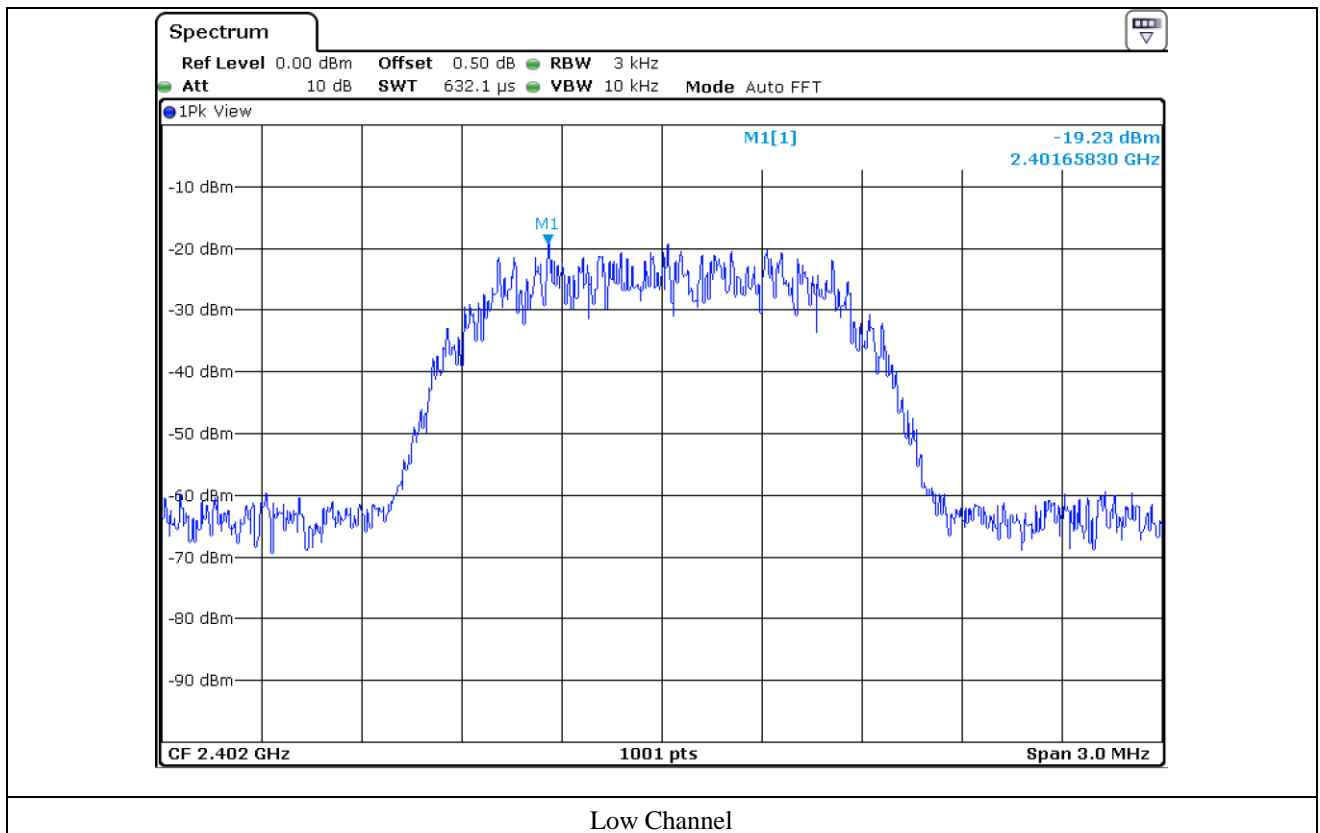

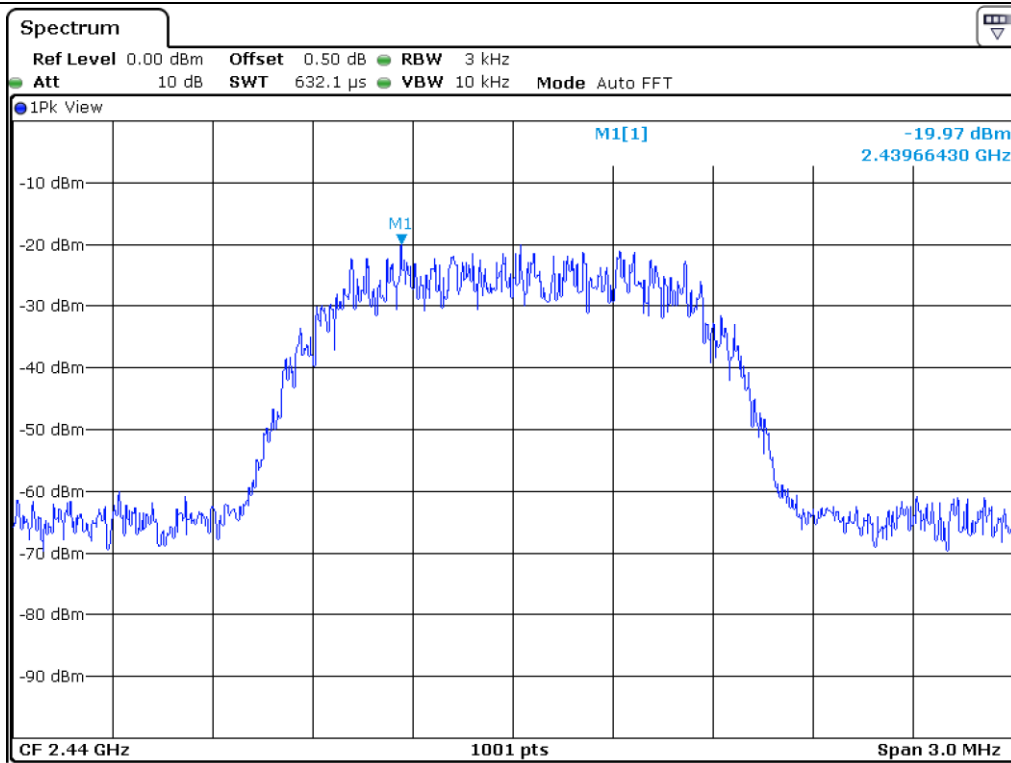

Middle Channel

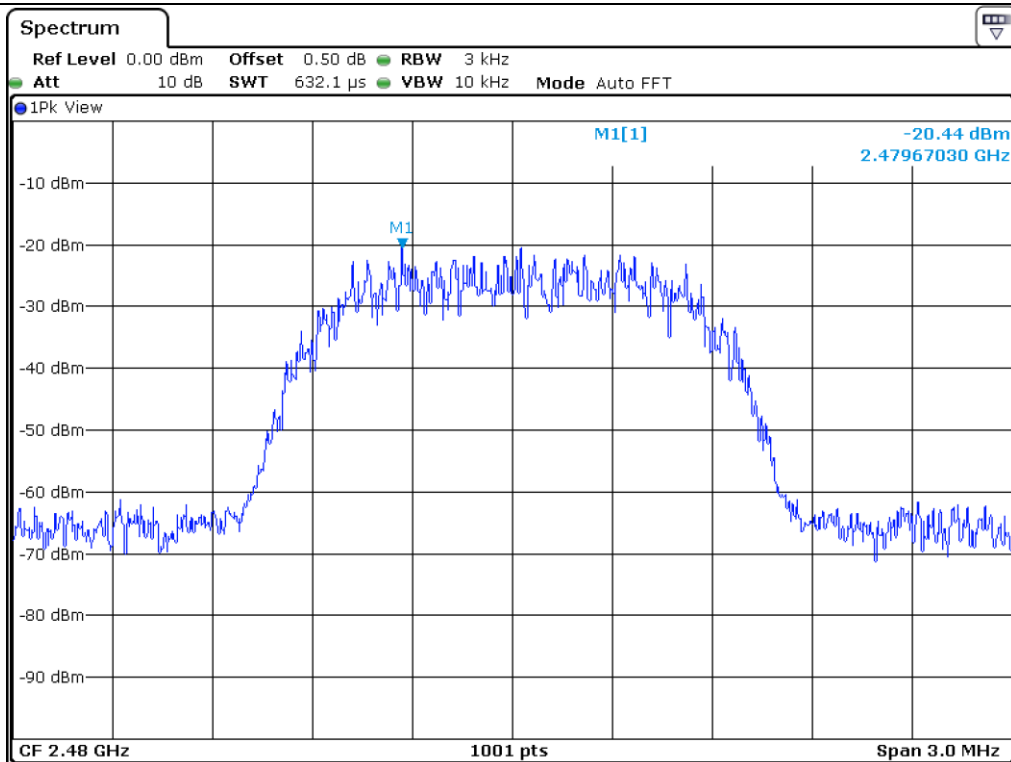

High Channel

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

11.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Mar. 28, 2019 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312544	Mar. 18, 2019 (1Y)
■ - BBV 9718B	Schwarzbeck	Amplifier	009	Mar. 20, 2019 (1Y)
■ - SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Mar. 11, 2019 (1Y)
■ - DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ - MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	777	Apr. 13, 2018 (2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	9120D-1366	Jul. 16, 2019 (1Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170179	Jan. 16, 2019 (1Y)
■ - VAMP9243	Schwarzbeck	ROD ANTENNA	VAMP9243	Mar. 14, 2019 (2Y)

All test equipment used is calibrated on a regular basis.


11.4 Test data

11.4.1 Test data for 30 MHz ~ 1 GHz

Humidity Level : 45 % R.H. Temperature: 23 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247
 Result : PASSED

EUT : AWAIR ELEMENT Date: August 08, 2019 ~ August 16, 2019

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

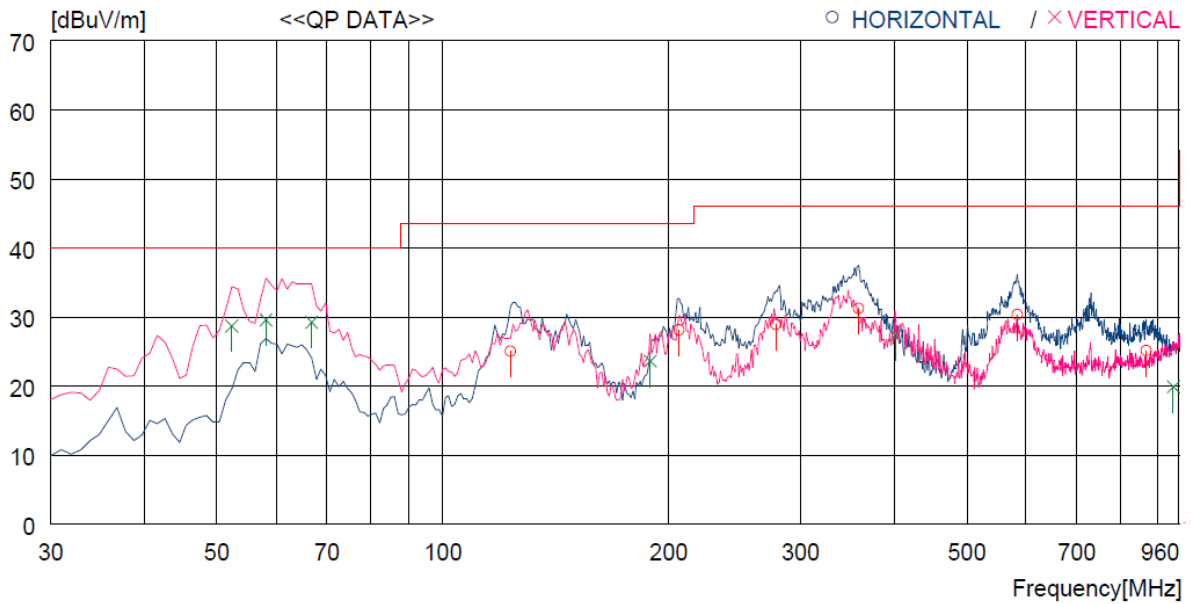

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	123.120	45.5	10.0	2.5	33.0	25.0	43.5	18.5	200	98
2	358.830	44.8	15.0	4.4	33.0	31.2	46.0	14.8	100	312
3	583.868	38.9	19.2	5.5	33.3	30.3	46.0	15.7	300	359
4	206.540	46.8	11.0	3.3	33.0	28.1	43.5	15.4	100	359
5	278.320	44.9	13.1	3.9	33.0	28.9	46.0	17.1	100	359
6	867.100	28.9	21.9	6.9	32.6	25.1	46.0	20.9	100	359
----- Vertical -----										
7	58.130	47.5	13.4	1.8	33.1	29.6	40.0	10.4	100	0
8	66.860	49.9	10.5	1.9	33.1	29.2	40.0	10.8	100	0
9	942.758	21.6	23.1	7.2	32.0	19.9	46.0	26.1	100	240
10	52.310	46.2	13.9	1.7	33.1	28.7	40.0	11.3	100	58
11	189.080	42.5	10.9	3.2	33.0	23.6	43.5	19.9	100	83
12	401.510	40.0	15.9	4.6	33.1	27.4	46.0	18.6	100	149

Tested by: Hyung-Kwon, Oh / Assistant Manager

11.4.2 Test data for Below 30 MHz

- . Test Date : August 08, 2019 ~ August 16, 2019
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.									

11.4.3 Test data for above 1 GHz

- . Test Date : August 08, 2019 ~ August 16, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.									



Tested by: Hyung-Kwon, Oh / Assistant Manager

12. CONDUCTED EMISSION TEST

12.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

12.2 Test set-up

The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μH + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.


12.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ -	ESCI	Rohde & Schwarz	Test Receiver	101012	Oct. 22, 2018 (1Y)
□ -	NSLK8128	Schwarzbeck	AMN	8128-216	Mar. 20, 2019 (1Y)
■ -	NSLK8126	Schwarzbeck	AMN	8126-404	Mar. 19, 2019 (1Y)
□ -	3825/2	EMCO	AMN	9109-1869	Mar. 19, 2019 (1Y)
■ -	3825/2	EMCO	AMN	9109-1867	Mar. 27, 2019 (1Y)

All test equipment used is calibrated on a regular basis.


12.4 Test data

- Test Date : August 08, 2019 ~ August 16, 2019
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

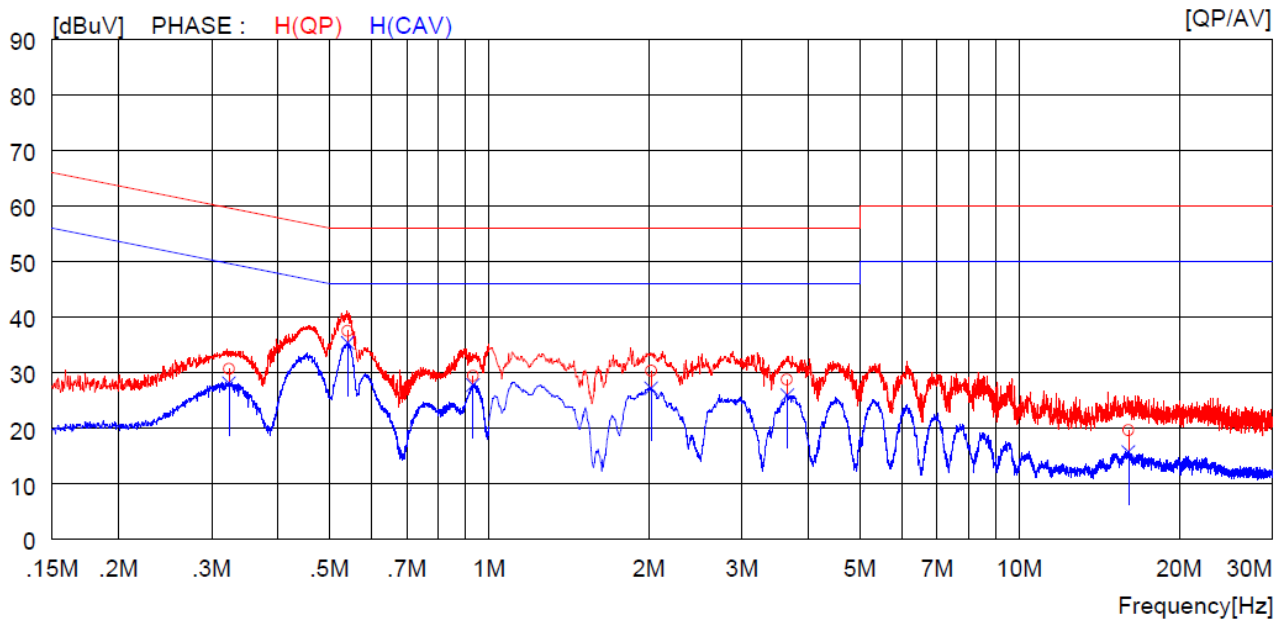

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.32300	20.7	----	10.0	30.7	----	59.6	----	28.9	----	H (QP)
2	0.54100	27.5	----	10.0	37.5	----	56.0	----	18.5	----	H (QP)
3	0.93200	19.4	----	10.0	29.4	----	56.0	----	26.6	----	H (QP)
4	2.02000	20.2	----	10.1	30.3	----	56.0	----	25.7	----	H (QP)
5	3.64800	18.6	----	10.1	28.7	----	56.0	----	27.3	----	H (QP)
6	16.05000	9.1	----	10.6	19.7	----	60.0	----	40.3	----	H (QP)
7	0.32300	----	18.1	10.0	----	28.1	----	49.6	----	21.5	H (CAV)
8	0.54100	----	25.4	10.0	----	35.4	----	46.0	----	10.6	H (CAV)
9	0.93200	----	17.8	10.0	----	27.8	----	46.0	----	18.2	H (CAV)
10	2.02000	----	17.1	10.1	----	27.2	----	46.0	----	18.8	H (CAV)
11	3.64800	----	15.9	10.1	----	26.0	----	46.0	----	20.0	H (CAV)
12	16.05000	----	5.2	10.6	----	15.8	----	50.0	----	34.2	H (CAV)

-. Tested Line : NEUTRAL LINE

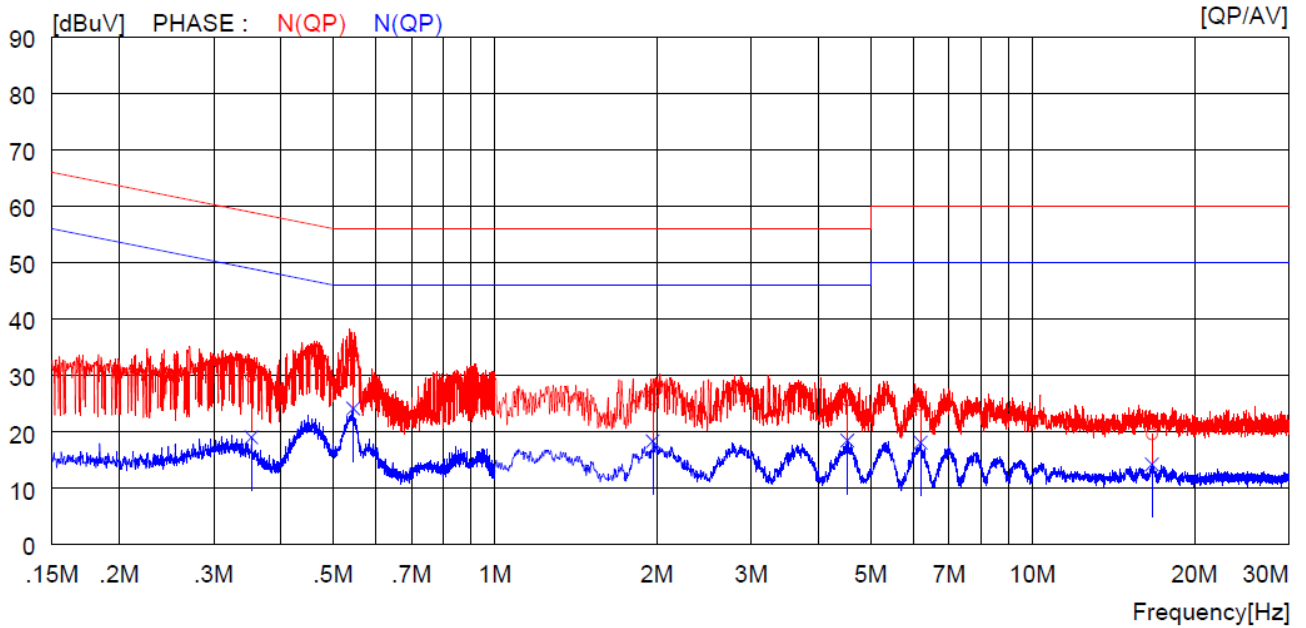

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.35200	19.8	----	10.0	29.8	----	58.9	----	29.1	----	N(QP)
2	0.54500	23.4	----	10.0	33.4	----	56.0	----	22.6	----	N(QP)
3	1.96400	15.7	----	10.1	25.8	----	56.0	----	30.2	----	N(QP)
4	4.52400	15.5	----	10.1	25.6	----	56.0	----	30.4	----	N(QP)
5	6.19000	14.6	----	10.2	24.8	----	60.0	----	35.2	----	N(QP)
6	16.69000	8.9	----	10.6	19.5	----	60.0	----	40.5	----	N(QP)
7	0.35200	----	9.0	10.0	----	19.0	----	48.9	----	29.9	N(CAV)
8	0.54500	----	14.1	10.0	----	24.1	----	46.0	----	21.9	N(CAV)
9	1.96400	----	8.2	10.1	----	18.3	----	46.0	----	27.7	N(CAV)
10	4.52400	----	8.4	10.1	----	18.5	----	46.0	----	27.5	N(CAV)
11	6.19000	----	7.9	10.2	----	18.1	----	50.0	----	31.9	N(CAV)
12	16.69000	----	3.7	10.6	----	14.3	----	50.0	----	35.7	N(CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

Tested by: Hyung-Kwon, Oh / Assistant Manager