



<b>Prüfbericht-Nr.:</b> <i>Test report no.:</i>	<b>CN22CNDL 001</b>	<b>Auftrags-Nr.:</b> <i>Order no.:</i>	168358590	Seite 1 von 31 <i>Page 1 of 31</i>	
<b>Kunden-Referenz-Nr.:</b> <i>Client reference no.:</i>	N/A	<b>Auftragsdatum:</b> <i>Order date:</i>	2022-01-26		
<b>Auftraggeber:</b> <i>Client:</i>	<b>Shenzhen RAKwireless Technology Co.,Ltd.</b> Room 506, Building B, New Compark, Pingshan First Road, Taoyuan Street, Nanshan District, Shenzhen, Guangdong, China				
<b>Prüfgegenstand:</b> <i>Test item:</i>	WisDuo LPWAN Module				
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type no.:</i>	RAK11300, RAK11310 (Trademark: RAK)				
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	FCC and IC approval				
<b>Prüfgrundlage:</b> <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 CFR47 FCC Part 2: Section 2.1093	RSS-247 Issue 2 February 2017 RSS-Gen Issue 5 February 2021 RSS-102 Issue 5 February 2021			
<b>Wareneingangsdatum:</b> <i>Date of sample receipt:</i>	2022-02-10	Please refer to photo documents			
<b>Prüfmuster-Nr.:</b> <i>Test sample no.:</i>	A003207708				
<b>Prüfzeitraum:</b> <i>Testing period:</i>	2022-02-11 - 2022-04-07				
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.				
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.				
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass				
<b>geprüft von:</b> <i>tested by:</i>		<b>genehmigt von:</b> <i>authorized by:</i>			
<b>Datum:</b> <i>Date:</i> 2022-04-18	Signed by: Alex Lan	<b>Ausstellungsdatum:</b> <i>Issue date:</i> 2022-04-19	Signed by: Winnie Hou		
<b>Stellung / Position</b>	Senior Project Engineer	<b>Stellung / Position</b>	Department Manager		
<b>Sonstiges / Other:</b>	FCC ID: 2AF6B-RAK11300 IC: 25908-RAK11300, HVIN: RAK11300, RAK11310				
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged:</i>				
<b>Legend:</b>	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n) 1 = very good P(ass) = passed a.m. test specifications(s)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n) 2 = good F(ail) = failed a.m. test specifications(s)	3 = befriedigend 3 = satisfactory	4 = ausreichend 4 = sufficient	5 = mangelhaft N/T = nicht getestet 5 = poor N/T = not tested
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b>					
<i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

V05

## Test Summary

**5.1.1 ANTENNA REQUIREMENT***RESULT: Pass***5.1.2 MAXIMUM CONDUCTED OUTPUT POWER***RESULT: Pass***5.1.3 CONDUCTED POWER SPECTRAL DENSITY***RESULT: Pass***5.1.4 6dB BANDWIDTH***RESULT: Pass***5.1.5 20dB BANDWIDTH***RESULT: Pass***5.1.6 99% BANDWIDTH***RESULT: Pass***5.1.7 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH***RESULT: Pass***5.1.8 RADIATED SPURIOUS EMISSION***RESULT: Pass***5.1.9 CARRIER FREQUENCY SEPARATION***RESULT: Pass***5.1.10 NUMBER OF HOPPING FREQUENCY***RESULT: Pass***5.1.11 TIME OF OCCUPANCY***RESULT: Pass***5.1.12 CONDUCTED EMISSION ON AC MAINS***RESULT: Pass***6.1.1 ELECTROMAGNETIC FIELDS***RESULT: Pass*

## Contents

<b>1</b>	<b>GENERAL REMARKS .....</b>	<b>5</b>
<b>1.1</b>	<b>COMPLEMENTARY MATERIALS .....</b>	<b>5</b>
<b>2</b>	<b>TEST SITES.....</b>	<b>6</b>
<b>2.1</b>	<b>TEST FACILITIES.....</b>	<b>6</b>
<b>2.2</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS .....</b>	<b>6</b>
<b>2.3</b>	<b>TRACEABILITY.....</b>	<b>7</b>
<b>2.4</b>	<b>CALIBRATION.....</b>	<b>7</b>
<b>2.5</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>7</b>
<b>2.6</b>	<b>LOCATION OF ORIGINAL DATA .....</b>	<b>8</b>
<b>2.7</b>	<b>STATUS OF FACILITY USED FOR TESTING.....</b>	<b>8</b>
<b>3</b>	<b>GENERAL PRODUCT INFORMATION.....</b>	<b>9</b>
<b>3.1</b>	<b>PRODUCT FUNCTION AND INTENDED USE.....</b>	<b>9</b>
<b>3.2</b>	<b>RATINGS AND SYSTEM DETAILS .....</b>	<b>10</b>
<b>3.3</b>	<b>INDEPENDENT OPERATION MODES .....</b>	<b>12</b>
<b>3.4</b>	<b>NOISE GENERATING AND NOISE SUPPRESSING PARTS.....</b>	<b>12</b>
<b>3.5</b>	<b>SUBMITTED DOCUMENTS.....</b>	<b>12</b>
<b>4</b>	<b>TEST SET-UP AND OPERATION MODES .....</b>	<b>13</b>
<b>4.1</b>	<b>PRINCIPLE OF CONFIGURATION SELECTION.....</b>	<b>13</b>
<b>4.2</b>	<b>TEST OPERATION AND TEST SOFTWARE.....</b>	<b>13</b>
<b>4.3</b>	<b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....</b>	<b>13</b>
<b>4.4</b>	<b>COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....</b>	<b>13</b>
<b>4.5</b>	<b>TEST SETUP DIAGRAM .....</b>	<b>14</b>
<b>5</b>	<b>TEST RESULTS.....</b>	<b>16</b>
<b>5.1</b>	<b>TRANSMITTER REQUIREMENT &amp; TEST SUITES.....</b>	<b>16</b>
<b>5.1.1</b>	<i>Antenna Requirement.....</i>	<i>16</i>
<b>5.1.2</b>	<i>Maximum Conducted Output Power .....</i>	<i>17</i>
<b>5.1.3</b>	<i>Conducted Power Spectral Density.....</i>	<i>19</i>
<b>5.1.4</b>	<i>6dB Bandwidth.....</i>	<i>20</i>
<b>5.1.5</b>	<i>20dB Bandwidth .....</i>	<i>21</i>
<b>5.1.6</b>	<i>99% Bandwidth .....</i>	<i>22</i>
<b>5.1.7</b>	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth .....</i>	<i>23</i>
<b>5.1.8</b>	<i>Radiated Spurious Emission.....</i>	<i>24</i>
<b>5.1.9</b>	<i>Carrier Frequency Separation.....</i>	<i>25</i>
<b>5.1.10</b>	<i>Number of Hopping Frequency.....</i>	<i>26</i>
<b>5.1.11</b>	<i>Time of Occupancy .....</i>	<i>27</i>
<b>5.1.12</b>	<i>Conducted Emission on AC Mains.....</i>	<i>28</i>
<b>6</b>	<b>SAFETY HUMAN EXPOSURE .....</b>	<b>29</b>
<b>6.1</b>	<b>RADIO FREQUENCY EXPOSURE COMPLIANCE.....</b>	<b>29</b>
<b>6.1.1</b>	<i>Electromagnetic Fields .....</i>	<i>29</i>

<b>7</b>	<b>PHOTOGRAPHS OF THE TEST SET-UP .....</b>	<b>31</b>
<b>8</b>	<b>LIST OF TABLES .....</b>	<b>31</b>

# 1 General Remarks

## 1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results.

## 2 Test Sites

### 2.1 Test Facilities

**TÜV Rheinland (Shenzhen) Co., Ltd.**

362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China

FCC Registration No.: 694916

ISED wireless device testing laboratory: 25069, CAB identifier: CN0078

### 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

**TÜV Rheinland (Shenzhen) Co., Ltd.**

<b>Radio Spectrum Testing</b>				
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal. until</b>
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY60241175	2022-09-28
MXG X-Series RF Vector Signal Generator	Keysight	N5182B	MY61250137	2022-09-28
EXG X-Series Microwave Analog Signal Generator	Keysight	N5173B	MY61250141	2022-09-28
DC Power Supply	Keysight	E3642A	MY61276100	2022-09-28
Power Control Unit	Tonscend	JS0806-4ADC	N/A	2022-09-28
Automation Control Unit	Tonscend	JS0806-2	21C8060396	2022-09-28
Test Software	Tonscend	JS1120-3	N/A	N/A
Control PC	Lenovo	TianYi510S-071MB	YLX23JMF	N/A
<b>Unwanted Emission Testing</b>				
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal. until</b>
EMI Test Receiver	R&S	ESR 7	102021	2022-08-10
Signal Analyzer	R&S	FSV 40	101439	2022-08-09
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	2022-08-09
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2022-08-09
Amplifier	R&S	SCU-18F	180070	2022-08-09
Amplifier	R&S	SCU40A	100475	2022-08-09
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2022-08-08

Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2022-08-08
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2022-08-08
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2022-09-13
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-06-22
<b>Conducted Emission on AC Mains</b>				
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cali. until</b>
EMI Test Receiver	R&S	ESR3	102680	2022-04-25
Artificial Mains Network	R&S	ENV216	101445	2022-04-25
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

## 2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	$\pm 2.5$ dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	$\pm 6$ dB
Radiated Emission of Receiver, valid up to 26.5 GHz	$\pm 6$ dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	$\pm 3.70$ dB / $\pm 3.30$ dB
Radiated Emission (3m SAC), 30MHz to 1000MHz	$\pm 4.52$ dB
Radiated Emission (3m SAC), above 1000MHz	$\pm 4.37$ dB

## 2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

## 2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.



### 3 General Product Information

#### 3.1 Product Function and Intended Use

The EUT is a WisDuo LoRa Module which supports Lora technology.

This module has three different antennas, the details specifications for these antennas as below:

Antenna #	Model	Antenna Gain	Antenna Type	Connector Type
1#	2701C02Q	0.8dBi	PCB Antenna	IPEX connector
2#	KRAKBJ2701C01A	2.3 dBi	Dipole Antenna	RPSMA connector
3#	KRAKBJ2701C01C	2.3 dBi	Dipole Antenna	RPSMA connector

1. When connecting to the module, all antennas listed above need to transfer to an **IPEX connector**.
2. Antennas 2# and 3# have the same type and similar in-band and out-of-band characteristics and only the color of enclosure different, they are considered as equivalent antennas. Thus, the antenna 3# with highest gain was selected to be tested.

Data Rate	Configuration	Indicative physical bit rate [bit/sec]
0	LoRa Modulation: SF10 / Bandwidth 125 kHz	980
1	LoRa Modulation: SF9 / Bandwidth 125 kHz	1760
2	LoRa Modulation: SF8 / Bandwidth 125 kHz	3125
3	LoRa Modulation: SF7 / Bandwidth 125 kHz	5470
4	LoRa Modulation: SF8 / Bandwidth 500 kHz	12500

All models are identical except the construction, model RAK11310 has an additional baseboard and other model model RAK11300 doesn't have, the baseboard is the extension of I/O.

For details refer to the User Manual, Technical Description and Circuit Diagram.

## 3.2 Ratings and System Details

**Table 2: Technical Specification of EUT**

<b>General Information of EUT</b>	<b>Value</b>
Kind of Equipment	WisDuo LPWAN Module
Type Designation	RAK11300, RAK11310
Trademark	RAK
FCC ID	2AF6B-RAK11300
IC	25908-RAK11300
HVIN	RAK11300, RAK11310
Operating Voltage	DC 3.3V (Supplied by socket of PCB board)
Testing Voltage	DC 5V Via USB port
<b>Technical Specification of Lora DTS</b>	
Operating Frequency	903 – 914.2MHz
Type of Modulation	Lora
Data Rate	SF8 / DR4
Channel Number	8 channels (Upstream)
Channel Separation	1.6 MHz
Occupied Bandwidth	500 KHz
<b>Technical Specification of Lora FHSS</b>	
Frequency Range	902.3 – 914.9MHz
Type of Modulation	Lora
Data Rate	SF7 to SF10 / DR0 to DR3
Channel Number	64 channels (Upstream)
Channel Separation	200 KHz
Occupied Bandwidth	125 KHz

**Table 3: RF Channel and Frequency of Lora FHSS**

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
<b>0</b>	<b>902.3</b>	16	905.5	32	908.7	48	911.9
1	902.5	17	905.7	33	908.9	49	912.1
2	902.7	18	905.9	34	909.1	50	912.3
3	902.9	19	906.1	35	909.3	51	912.5
4	903.1	20	906.3	36	909.5	52	912.7
5	903.3	21	906.5	37	909.7	53	912.9
6	903.5	22	906.7	38	909.9	54	913.1
7	903.7	23	906.9	39	910.1	55	913.3
8	903.9	24	907.1	40	910.3	56	913.5
9	904.1	25	907.3	41	910.5	57	913.7
10	904.3	26	907.5	42	910.7	58	913.9
11	904.5	27	907.7	43	910.9	59	914.1
12	904.7	28	907.9	44	911.1	60	914.3
13	904.9	29	908.1	45	911.3	61	914.5
14	905.1	30	908.3	46	911.5	62	914.7
15	905.3	<b>31</b>	<b>908.5</b>	47	911.7	<b>63</b>	<b>914.9</b>

**Table 4: RF Channel and Frequency of Lora DTS**

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
<b>64</b>	<b>903.0</b>	66	906.2	68	909.4	70	912.6
65	904.6	<b>67</b>	<b>907.8</b>	69	911.0	<b>71</b>	<b>914.2</b>

### 3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Lora transmitting mode (FHSS)
  - 1) Low Channel
  - 2) Middle Channel
  - 3) High Channel
- B. On, Lora transmitting mode (DTS)
  - 1) Low Channel
  - 2) Middle Channel
  - 3) High Channel
- C. On, Transmitting on Hopping channel
- D. Off

### 3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

### 3.5 Submitted Documents

- ID Label and Location Info

- User Manual

## 4 Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

**Radio Spectrum:** The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### 4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013 and ANSI C63.4: 2014.

According to clause 3.1, all tests were performed on model RAK11310 with antenna #1, #3 in this report

### 4.3 Special Accessories and Auxiliary Equipment

Table 5: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N	Rating
PC	Lenovo	ThinkPad T480	N/A	PC
PC adapter	Lenovo	ADLX65YDC3A	01FR030	PC adapter

### 4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

## 4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

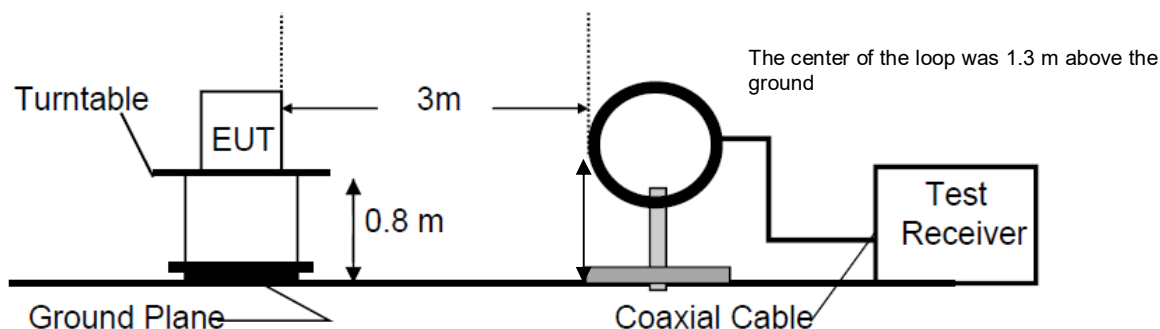


Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

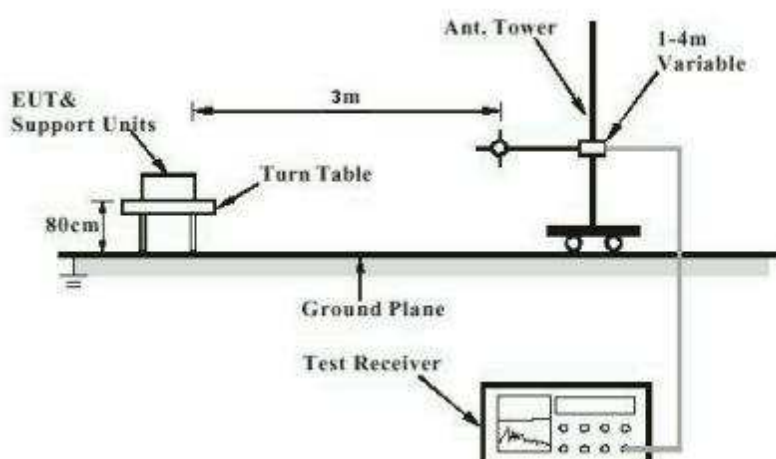


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

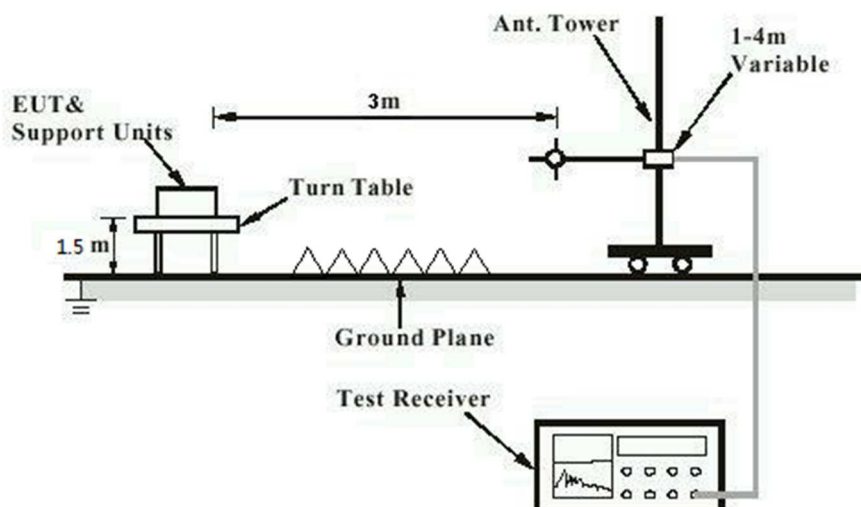


Diagram of Measurement Configuration for Mains Conduction Measurement


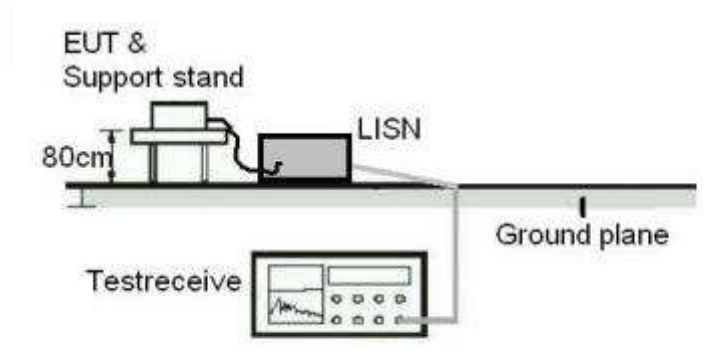


Diagram of Measurement Configuration for Conducted Transmitter Measurement

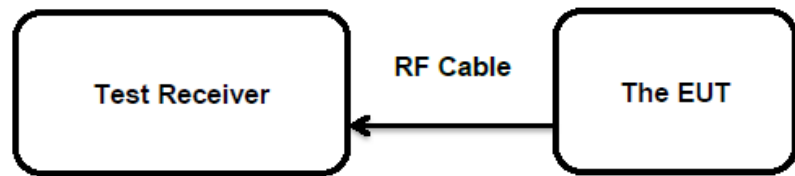

## 5 Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

**RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.247(b)(4) and Part 15.203  
RSS-Gen Clause 6.8

According to the manufacturer declared, the EUT has three IPEX Antenna, the directional gain of antenna are 2.3dBi & 0.8 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.



## 5.1.2 Maximum Conducted Output Power

**RESULT:**
**Pass**
**Test Specification**

Test standard	: FCC Part 15.247(b)(2)&(3) RSS-247 Clause 5.4(a)&(d)
Basic standard	: ANSI C63.10: 2013 Not more than 1Watt(30dBm) for DTS in the band 902-928MHz
Limits	: Not more than 1Watt(30dBm) for FHSS with at least 50 hopping channels in the band 902-928MHz
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: 2022-02-11 - 2022-03-30
Input voltage	: DC 5V Via USB port
Operation mode	: A, B
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For Antenna gain 0.8dBi

**Table 6: Test Result of Maximum Conducted Average Output Power**

Test Mode	Test Channel (MHz)	Maximum Conducted Average Power		Limit (W)
		(dBm)	(W)	
Lora DTS	903.0	9.42	0.0087	< 1.0
	907.8	9.31	0.0085	
	914.2	9.11	0.0081	
Lora FHSS SF7	902.3	9.68	0.0093	< 0.125
	908.5	9.59	0.0091	
	914.9	9.38	0.0087	
Lora FHSS SF10	902.3	9.40	0.0087	< 0.125
	908.5	9.58	0.0091	
	914.9	9.47	0.0089	
<b>Max. Measured Value</b>		9.68	0.0093	

Note:

- 1) The cable loss is taken into account in results.
- 2) The maximum Antenna gain(G) : 0.8 dBi,  
e.i.r.p.=10.48dBm = 11.17mW, which is far below the 4 W

For Antenna gain 2.3dBi

**Table 7: Test Result of Maximum Conducted Average Output Power**

Test Mode	Test Channel (MHz)	Maximum Conducted Average Power		Limit (W)
		(dBm)	(W)	
Lora DTS	903.0	18.27	0.0671	< 1.0
	907.8	19.28	0.0847	
	914.2	21.32	0.1355	
Lora FHSS SF7	902.3	19.03	0.0800	< 0.125
	908.5	19.12	0.0817	
	914.9	19.08	0.0809	
Lora FHSS SF10	902.3	19.35	0.0861	< 0.125
	908.5	19.44	0.0879	
	914.9	19.23	0.0838	
<b>Max. Measured Value</b>		21.32	0.1355	

Note:

- 1) The cable loss is taken into account in results.
- 2) The maximum Antenna gain(G) : 2.3 dBi,  
 e.i.r.p.=23.62dBm = 230.14mW, which is far below the 4 W

### 5.1.3 Conducted Power Spectral Density

**RESULT:**
**Pass**
**Test Specification**

Test standard : FCC Part 15.247(e)  
                   : RSS-247 Clause 5.2(b)  
 Basic standard : ANSI C63.10: 2013  
 Limits : < 8 dBm / 3kHz  
 Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2022-03-30  
 Input voltage : DC 5V Via USB port  
 Operation mode : B  
 Test channel : Low / Middle / High  
 Ambient temperature : 25 °C  
 Relative humidity : 56 %  
 Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

**Table 8: Test Result of Maximum Peak Power Spectral Density, Lora DTS**

Antenna Gain	Test Mode	Test Channel (MHz)	Measured Peak Power Spectral Density (dBm/3KHz)
0.8 dBi	Lora DTS	903.0	-10.25
		907.8	-9.10
		914.2	-9.70
2.3 dBi	Lora DTS	903.0	-0.53
		907.8	0.05
		914.2	1.36
<b>Maximum Measured Value</b>			1.36

### 5.1.4 6dB Bandwidth

**RESULT:**
**Pass**
**Test Specification**

Test standard	: FCC Part 15.247(a)(2) RSS-247 Clause 5.2(a)
Basic standard	: ANSI C63.10: 2013
Limits	: At least 500kHz for bandwidth(DTS)
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: 2022-03-30
Input voltage	: DC 5V Via USB port
Operation mode	: B
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

**Table 9: Test Result of 6dB Bandwidth**

Test Mode	Test Channel (MHz)	6dB Bandwidth (KHz)	Limit (KHz)
Lora DTS	903.0	631.0	>500KHz
	907.8	628.1	
	914.2	628.1	
<b>Minimum Measured Value</b>		628.1	

### 5.1.5 20dB Bandwidth

**RESULT:**
**Pass**
**Test Specification**

Test standard	: FCC Part 15.247(a)(1) (i) RSS-247 Clause 5.1(a)
Basic standard	: ANSI C63.10: 2013 Not more than 500kHz and
Limits	: < 250KHz for at least 50 hopping frequencies >=250KHz for at least 25 hopping frequencies
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: 2022-03-30
Input voltage	: DC 5V Via USB port
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

**Table 10: Test Result of 20dB Bandwidth**

Test Mode	Test Channel (MHz)	20dB Bandwidth (kHz)	Limit (KHz)
Lora FHSS SF7	902.3	144.72	<500KHz
	908.5	144.72	
	914.9	144.72	
Lora FHSS SF10	902.3	138.21	
	908.5	138.93	
	914.9	138.21	
<b>Maximum Measured Value</b>		138.21	

### 5.1.6 99% Bandwidth

**RESULT:**
**Pass**
**Test Specification**

Test standard : RSS-Gen Clause 6.7  
 Basic standard : ANSI C63.10: 2013  
 Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2022-03-30  
 Input voltage : DC 5V Via USB port  
 Operation mode : A, B  
 Test channel : Low / Middle / High  
 Ambient temperature : 25 °C  
 Relative humidity : 56 %  
 Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

**Table 11: Test Result of 99% Bandwidth**

Test Mode	Test Channel (MHz)	99% Bandwidth (KHz)	Limit (KHz)
Lora DTS	903.0	494.90	
	907.8	503.62	
	914.2	503.62	
Lora FHSS SF7	902.3	126.63	
	908.5	126.63	
	914.9	126.63	
Lora FHSS SF10	902.3	125.90	
	908.5	125.90	
	914.9	125.90	
<b>Minimum Measured Value</b>		125.90	

### 5.1.7 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(d) RSS-247 Clause 5.5
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: Refer to test result
Input voltage	: DC 5V Via USB port
Operation mode	: A, B
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix B.

### 5.1.8 Radiated Spurious Emission

**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.247(d) & FCC Part 15.205 RSS-247 Clause 3.3
Basic standard	:	ANSI C63.10: 2013
Limits	:	Refer to 15.209(a) of FCC part 15.247(d)
Kind of test site	:	3m Semi-anechoic Chamber

**Test Setup**

Date of testing	:	2022-02-11 - 2022-03-30
Input voltage	:	DC 5V Via USB port
Operation mode	:	A, B
Test channel	:	Low / Middle / High
Ambient temperature	:	Refer to test result
Relative humidity	:	Refer to test result
Atmospheric pressure	:	101 kPa

**Remark:**

Testing was carried out within frequency range 9kHz to the tenth harmonics with all data rate and three channels (Lowest, middle and highest). Only the worst case spurious emissions configuration of the each mode were reported.

Radiated spurious emissions were performed on the EUT with antenna in three orthogonal orientations and only the worst (antenna horizontal) orientations was recorded.

For the measurement records, refer to the appendix B.



### 5.1.9 Carrier Frequency Separation

**RESULT:**
**Pass**
**Test Specification**

Test standard : FCC Part 15.247(a)(1)  
                   : RSS-247 Clause 5.1(b)  
 Basic standard : ANSI C63.10: 2013  
 Limits :  $\geq 20\text{dB}$  bandwidth, whichever is greater  
 Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2022-03-30 to 2022-04-07  
 Input voltage : DC 5V Via USB port  
 Operation mode : C  
 Test channel : Low / Middle / High  
 Ambient temperature : 25 °C  
 Relative humidity : 56 %  
 Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

**Table 12: Test Result of Carrier Frequency Separation**

Test Mode	Channel	Measured Channel Separation (KHz)	Limit (kHz)	Result
Lora FHSS SF7	Low Channel	221.418	$\geq 20\text{dB}$ bandwidth	Pass
	Adjacency Channel			
	Middle Channel	239.653		Pass
	Adjacency Channel			
	High Channel	269.175		Pass
	Adjacency Channel			
Lora FHSS SF10	Low Channel	239.653	$\geq 20\text{dB}$ bandwidth	Pass
	Adjacency Channel			
	Middle Channel	239.653		Pass
	Adjacency Channel			
	High Channel	238.780		Pass
	Adjacency Channel			

Note:

The limit is maximum 20 dB bandwidth: 136.7 KHz.





**5.1.12 Conducted Emission on AC Mains****RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.207(a) RSS-Gen Clause 8.8
Basic standard	:	ANSI C63.10: 2013
Frequency range	:	0.15 – 30MHz
Limits	:	FCC Part 15.207(a) RSS-Gen Table 3
Kind of test site	:	Shielded Room

**Test Setup**

Date of testing	:	2022-02-14
Input voltage	:	Powered by PC Adapter
Operation mode	:	A, B
Earthing	:	Not connected
Ambient temperature	:	22 °C
Relative humidity	:	64 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix B.

## 6 Safety Human Exposure

### 6.1 Radio Frequency Exposure Compliance

#### 6.1.1 Electromagnetic Fields

**RESULT:****Pass****Test Specification**

Test standard : CFR47 FCC Part 2: Section 2.1091  
CFR47 FCC Part 1: Section 1.1310  
FCC KDB Publication 447498 v06  
FCC KDB Publication 865664 D02 v01r02  
OET Bulletin 65 (Edition 97-01)  
RSS-102 Issue 5 March 2019

**This module has three different antennas, and the maximum e.r.i.p. configuration be evaluated as below:**

**FCC requirement:** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 20cm normally can be maintained between the user and the device.

**MPE Calculation Method according to OET Bulletin 65**

Power Density:  $S_{(mW/cm^2)} = PG/4\pi R^2$  or  $EIRP/4\pi R^2$

Where:

S = power density (mW/cm<sup>2</sup>)

P = power input to the antenna (mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (cm)

**The worst-case mode (the configuration having highest EIRP) specified:**

Lora DTS: 21.32 dBm with 2.3 dBi antenna gain

From the RF output power, the minimum mobile separation distance, d=20 cm, as well as the antenna gain, the RF power density can be calculated as below:

For Lora DTS:  $S_{(mW/cm^2)} = PG/4\pi R^2 = 0.046$  mW/cm<sup>2</sup>

**Limits for Maximum Permissible Exposure (MPE) according to FCC Part 1.1310:** 1.0 mW/cm<sup>2</sup>

➤ **IC requirements:** The EUT shall comply with the requirement of RSS-102 section 2.5.2.

#### **Exemption from Routine Evaluation Limits – RF Exposure Evaluation**

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $1.31 \times 10^{-2} f^{0.6834}$  W (adjusted for tune-up tolerance), where  $f$  is in MHz;

- RF exposure evaluation exempted power for Lora FHSS & DTS: 1.37 W

#### **The worst-case mode (the configuration having highest EIRP) specified:**

Lora DTS: 21.32 dBm

Antenna Gain: 2.3 dBi

The Max. e.i.r.p. for Lora DTS: 23.62dBm = 0.230 W

Both e.i.r.p. for the Lora FHSS and Lora DTS are less than the RF exposure evaluation exempted power. So RF exposure evaluation is not required.

**“RF Radiation Exposure Statement Caution: This Transmitter must be installed to provide a separation distance of at least 20 cm from all persons.”**

## 7 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

## 8 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Technical Specification of EUT .....	10
Table 3: RF Channel and Frequency of Lora FHSS.....	11
Table 4: RF Channel and Frequency of Lora DTS.....	11
Table 5: Auxiliary Equipment Used during Test.....	13
Table 6: Test Result of Maximum Conducted Average Output Power.....	17
Table 7: Test Result of Maximum Conducted Average Output Power.....	18
Table 8: Test Result of Maximum Peak Power Spectral Density, Lora DTS.....	19
Table 9: Test Result of 6dB Bandwidth.....	20
Table 10: Test Result of 20dB Bandwidth.....	21
Table 11: Test Result of 99% Bandwidth.....	22
Table 12: Test Result of Carrier Frequency Separation .....	25
Table 13: Test result of hopping channel number .....	26
Table 14: Test result of Channel Occupancy .....	27

## Appendix B: Test Results


APPENDIX B: TEST RESULTS.....	1
APPENDIX B.1: CONDUCTED POWER SPECTRAL DENSITY .....	2
<i>Lora DTS, Antenna gain 0.8dBi</i> .....	2
<i>Lora DTS, Antenna Gain 2.3dBi</i> .....	3
APPENDIX B.2: 6dB BANDWIDTH .....	5
<i>Lora DTS</i> .....	5
APPENDIX B.3: 20dB BANDWIDTH .....	7
<i>Lora FHSS, Data rate SF7</i> .....	7
<i>Lora FHSS, Data rate SF10</i> .....	8
APPENDIX B.4: 99% BANDWIDTH .....	10
<i>Lora FHSS, Data rate SF7</i> .....	10
<i>Lora FHSS, Data rate SF10</i> .....	11
<i>Lora DTS</i> .....	13
APPENDIX B.5: CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH .....	15
<i>Lora DTS</i> .....	15
<i>Lora FHSS, Data rate SF7, No hopping</i> .....	18
<i>Lora FHSS, Data rate SF10, No hopping</i> .....	21
<i>Lora FHSS, Data rate SF7, hopping</i> .....	24
<i>Lora FHSS, Data rate SF10, hopping</i> .....	25
<i>Lora DTS, Band Edge</i> .....	26
<i>Lora FHSS, Data rate SF7, No hopping, Band Edge</i> .....	27
<i>Lora FHSS, Data rate SF10, No hopping, Band Edge</i> .....	28
<i>Lora FHSS, Data rate SF7, hopping, Band Edge</i> .....	29
<i>Lora FHSS, Data rate SF10, hopping, Band Edge</i> .....	30
APPENDIX B.6: CARRIER FREQUENCY SEPARATION .....	31
<i>Lora FHSS, Data rate SF7</i> .....	31
<i>Lora FHSS, Data rate SF10</i> .....	32
APPENDIX B.7: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS .....	34
<i>Lora FHSS SF7, Antenna Gain: 0.8dBi</i> .....	34
<i>Lora DTS, Antenna Gain: 0.8dBi</i> .....	52
<i>Lora FHSS SF7, Antenna Gain: 2.3dBi</i> .....	70
<i>Lora DTS, Antenna Gain: 2.3dBi</i> .....	88
APPENDIX B.8: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS .....	106



### Appendix B.1: Conducted Power Spectral Density

Lora DTS, Antenna gain 0.8dBi

Low Channel

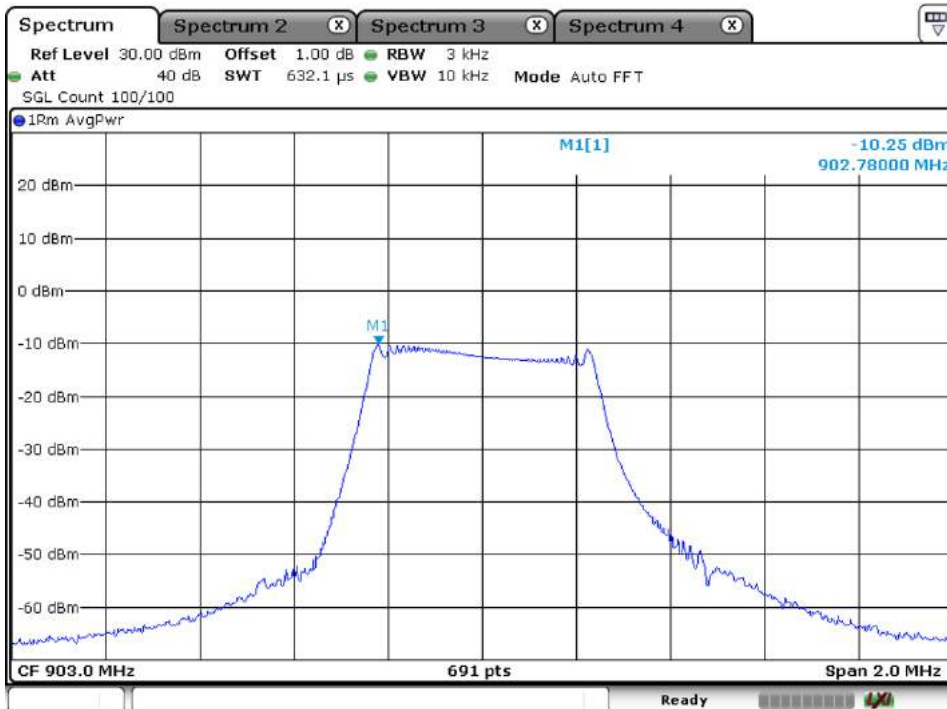


Date: 30.MAR.2022 07:43:08

Middle Channel



Date: 30.MAR.2022 07:52:58


High Channel

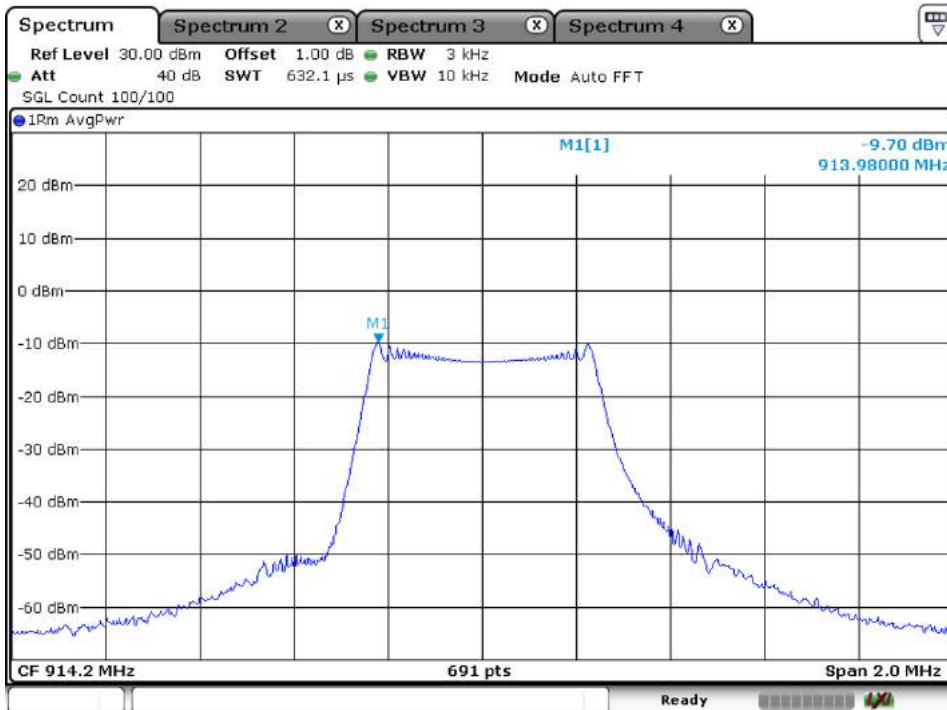

Date: 30.MAR.2022 07:56:15


Lora DTS, Antenna Gain 2.3dBi

Low Channel

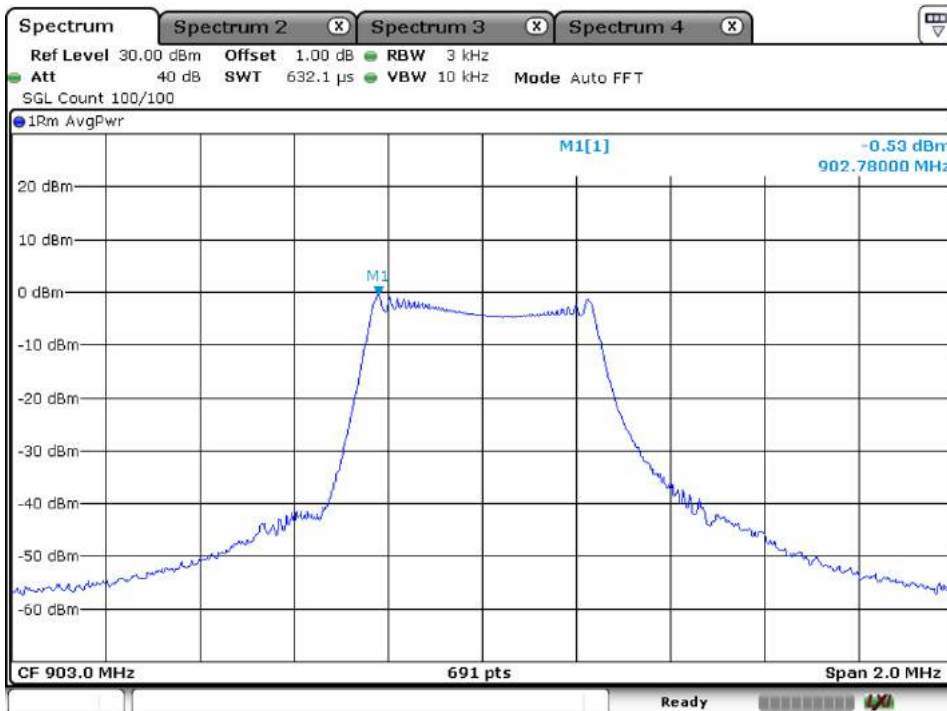


Date: 30.MAR.2022 08:10:22

Middle Channel

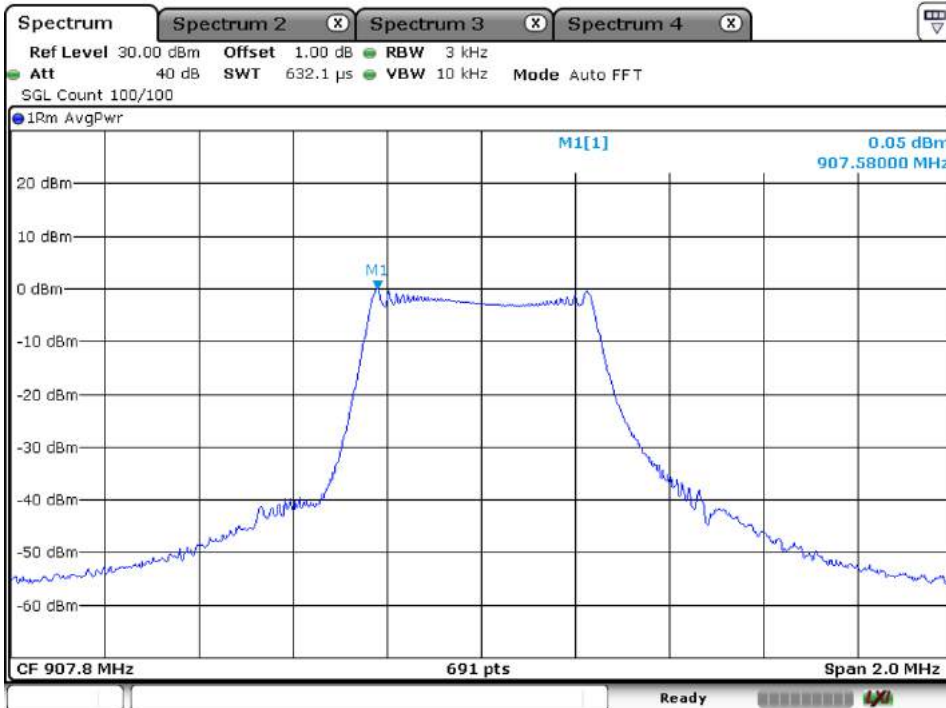

Date: 30.MAR.2022 08:04:04


High Channel

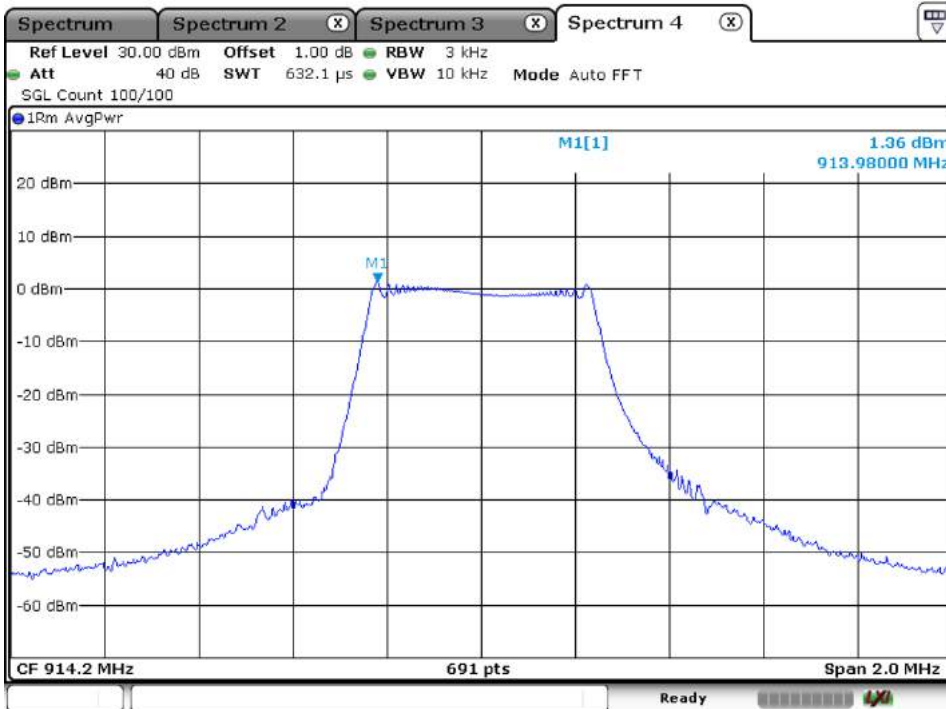

Date: 21.FEB.2022 08:24:21


## Appendix B.2: 6dB Bandwidth

Lora DTS  
Low Channel

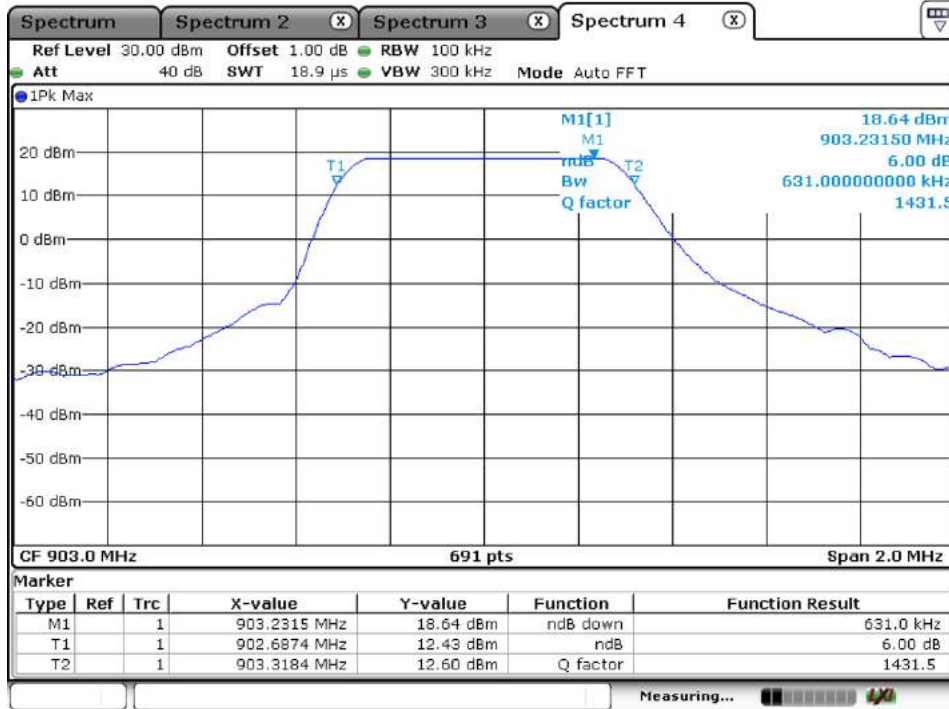


Date: 30.MAR.2022 08:08:29

Middle Channel

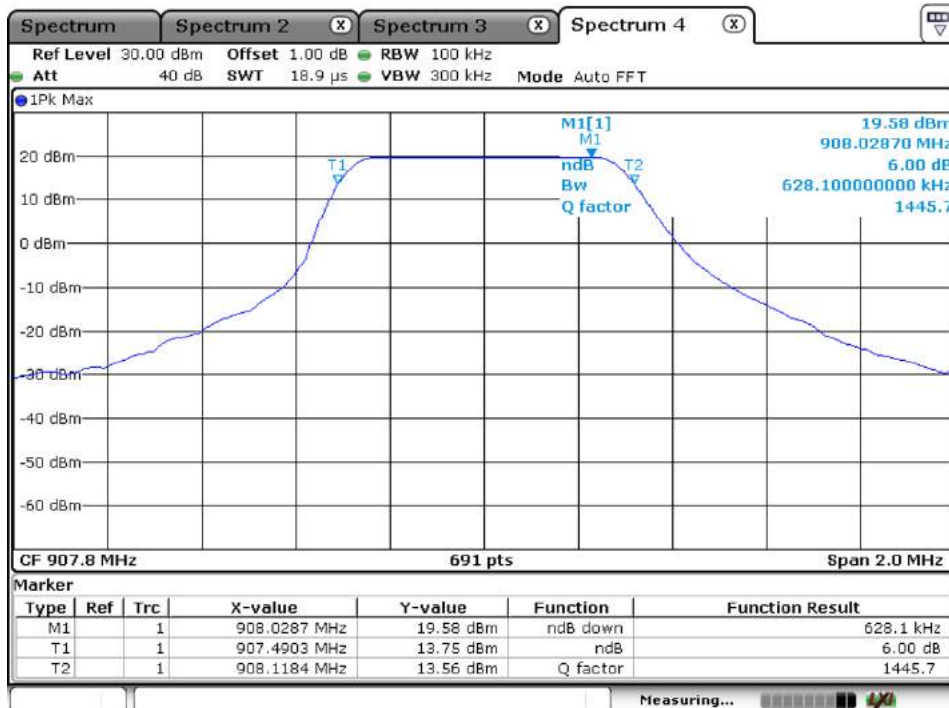

Date: 30.MAR.2022 08:05:33

High Channel

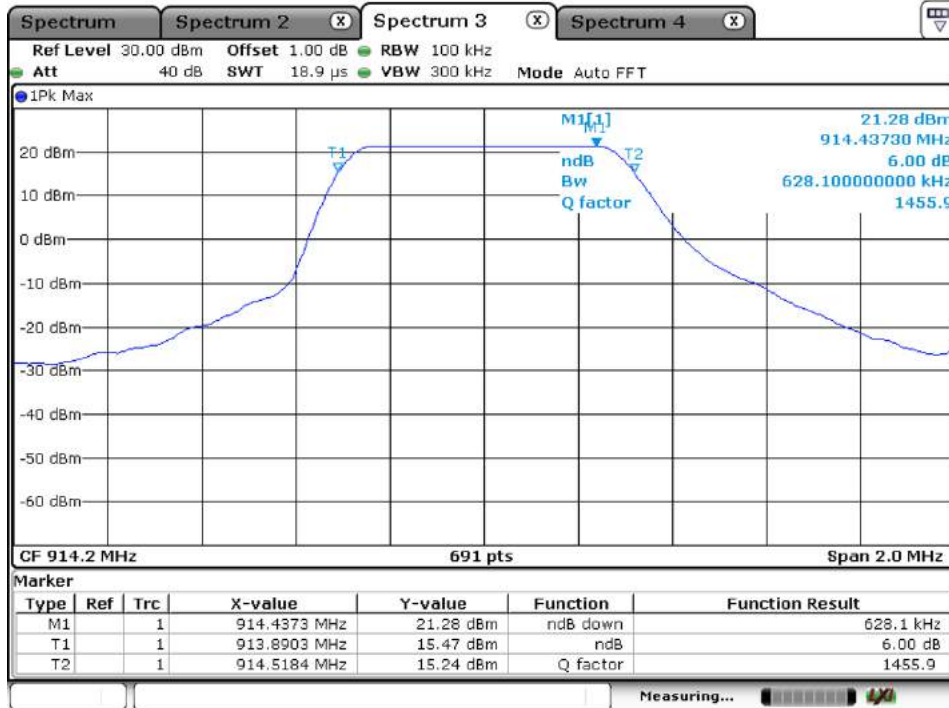


Date: 21.FEB.2022 08:27:08

### Appendix B.3: 20dB Bandwidth


#### Lora FHSS, Data rate SF7

##### Low Channel

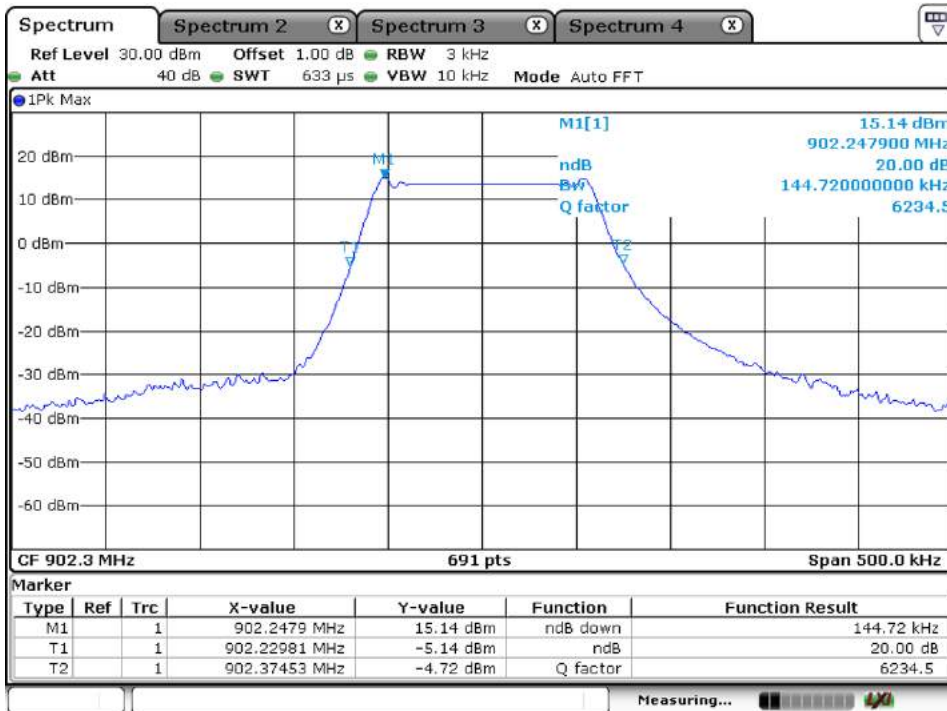

Date: 21.FEB.2022 08:45:04


##### Middle Channel

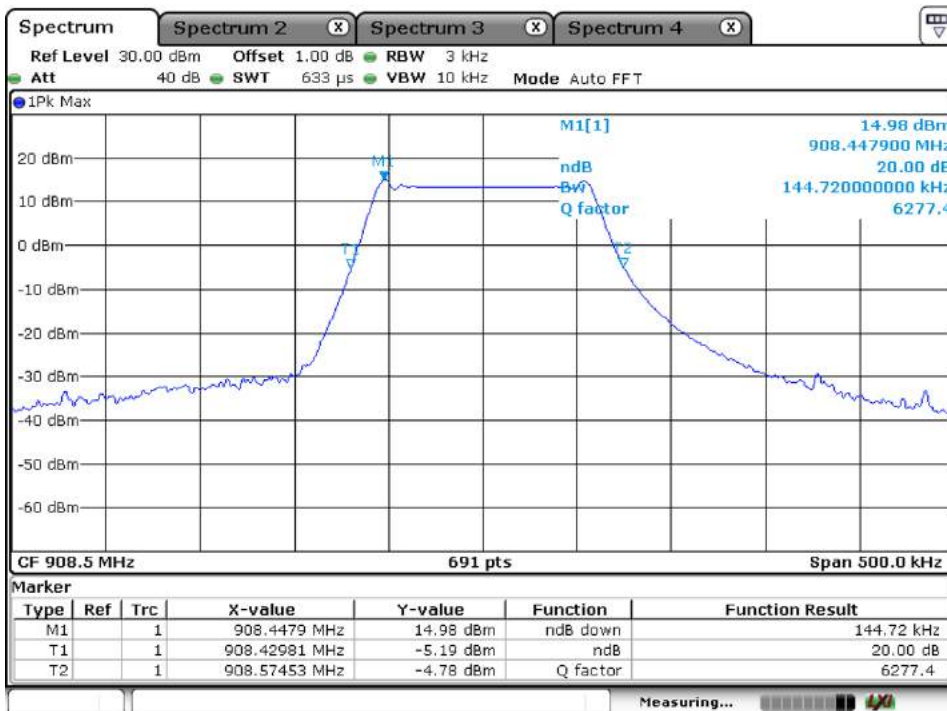

Date: 21.FEB.2022 09:10:08




High Channel

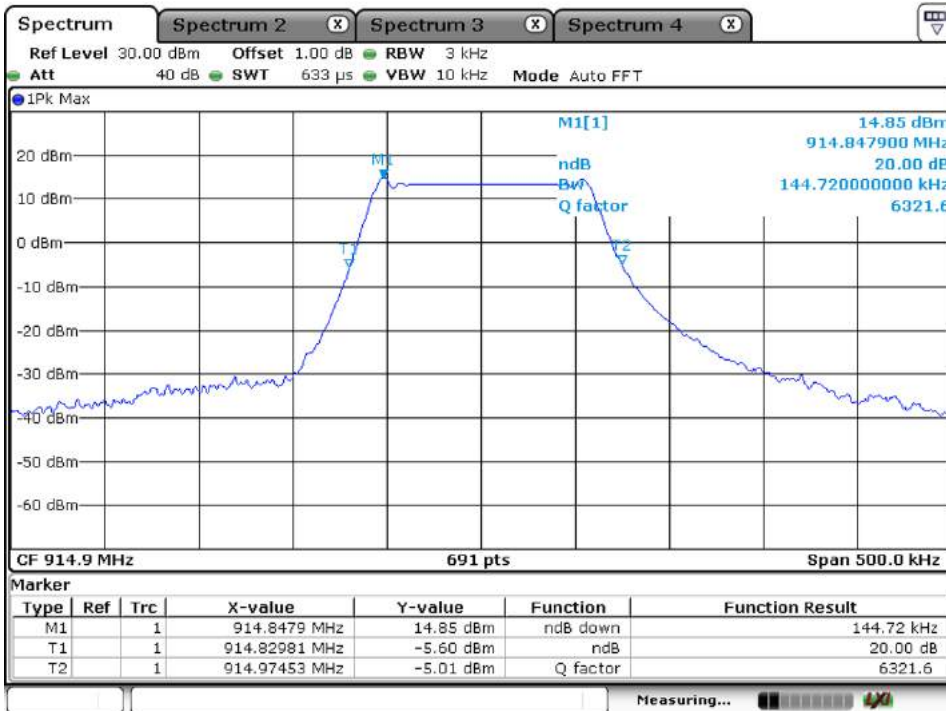

Date: 21.FEB.2022 09:00:26


Lora FHSS, Data rate SF10

Low Channel

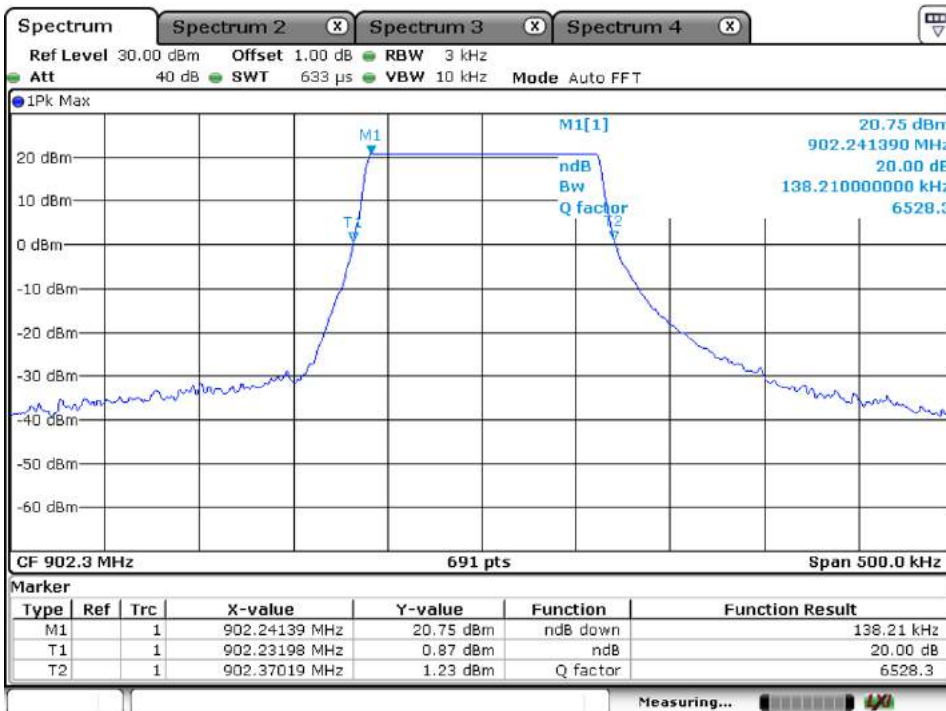


Date: 21.FEB.2022 09:24:09

Middle Channel

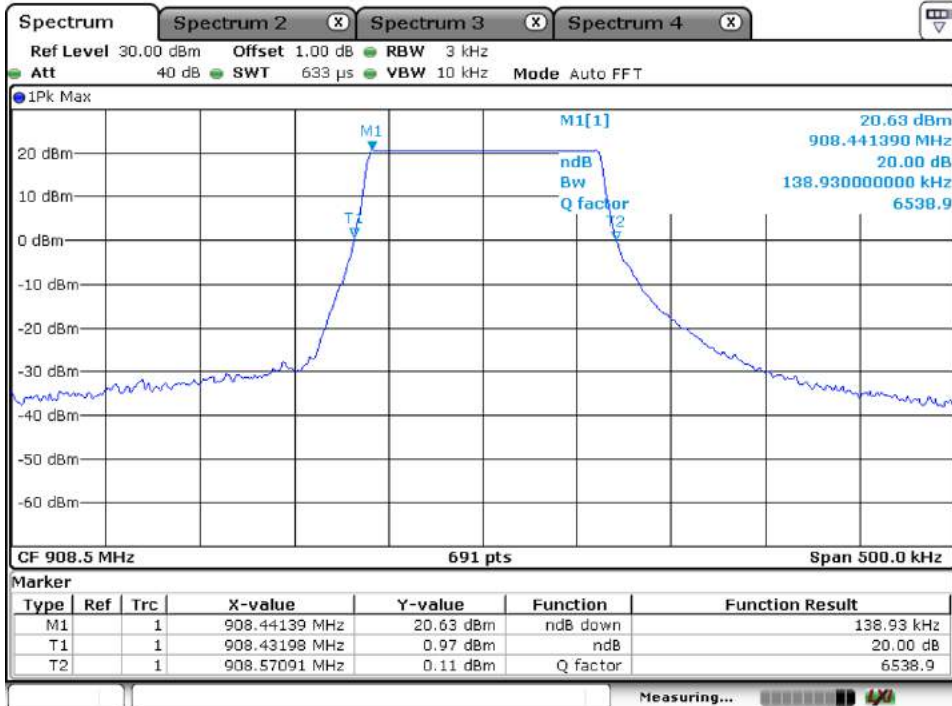

Date: 21.FEB.2022 09:16:41

High Channel

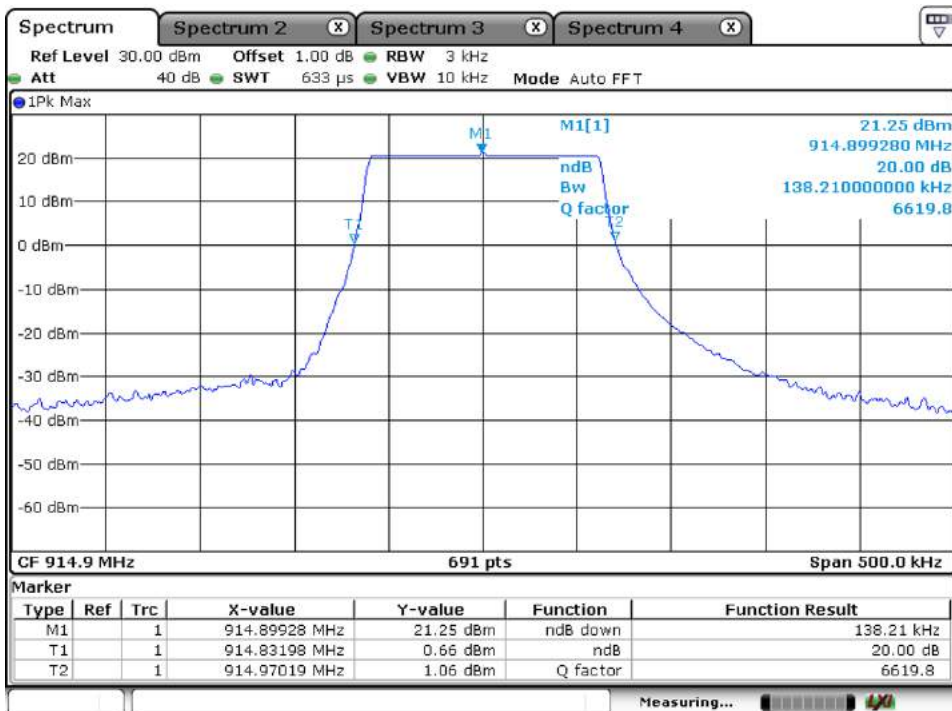


Date: 21.FEB.2022 09:31:51



### Appendix B.4: 99% Bandwidth


#### Lora FHSS, Data rate SF7

##### Low Channel

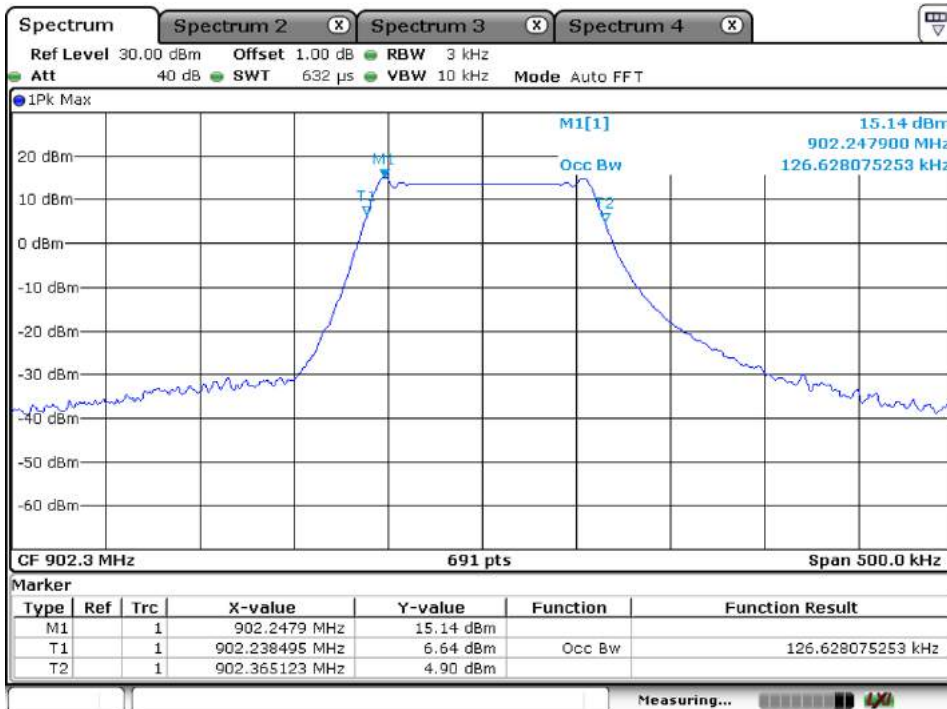


Date: 21.FEB.2022 08:44:44

##### Middle Channel

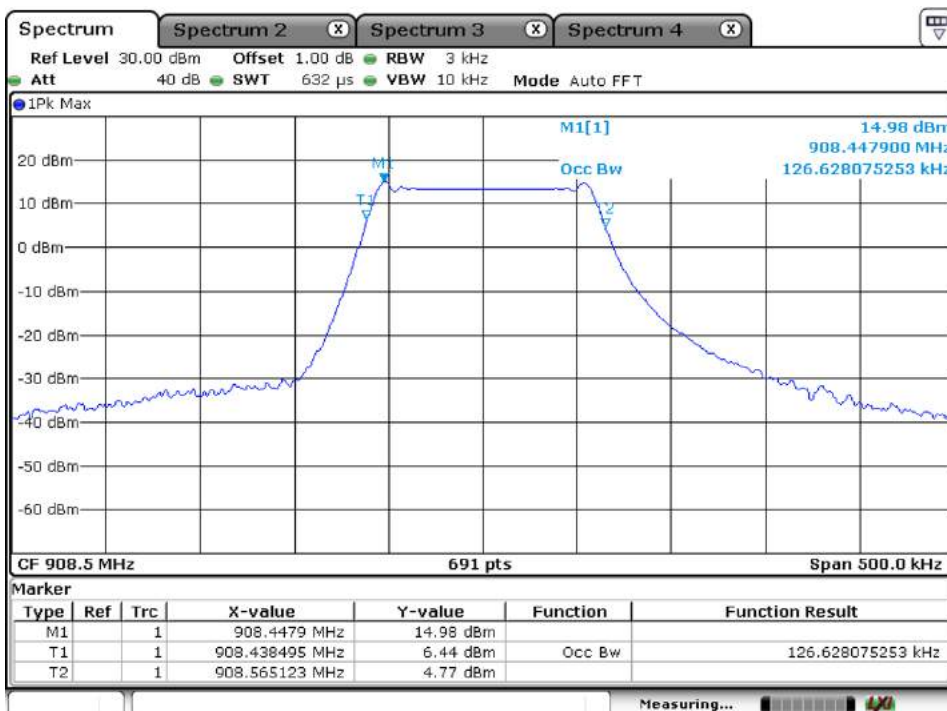

Date: 21.FEB.2022 09:09:08

High Channel

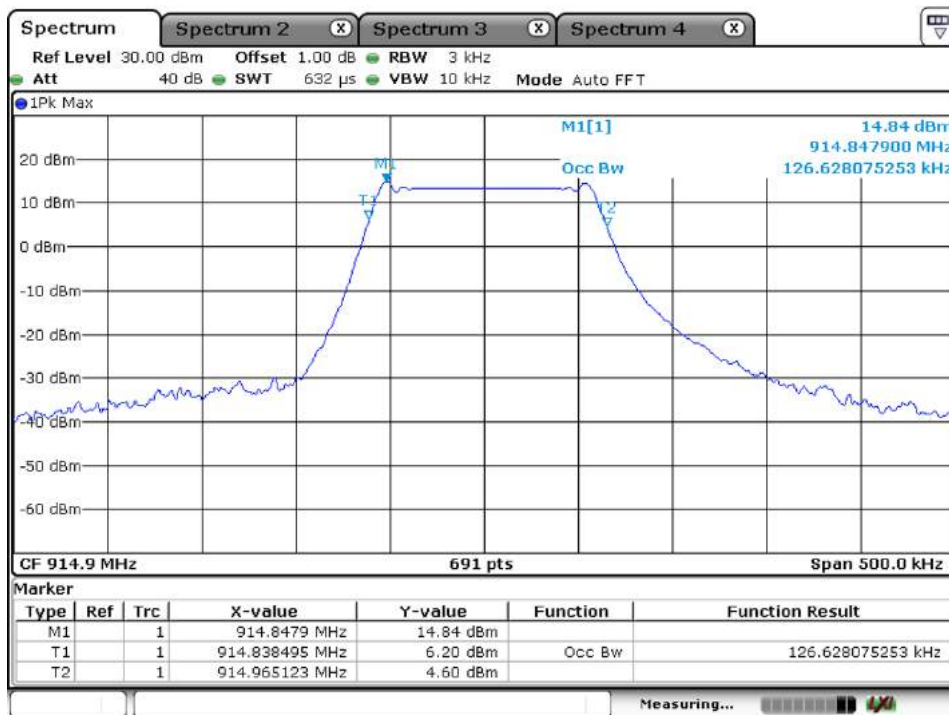

Date: 21.FEB.2022 09:03:32

Lora FHSS, Data rate SF10

Low Channel




Date: 21.FEB.2022 09:24:21

Middle Channel



Date: 21.FEB.2022 09:16:28


High Channel

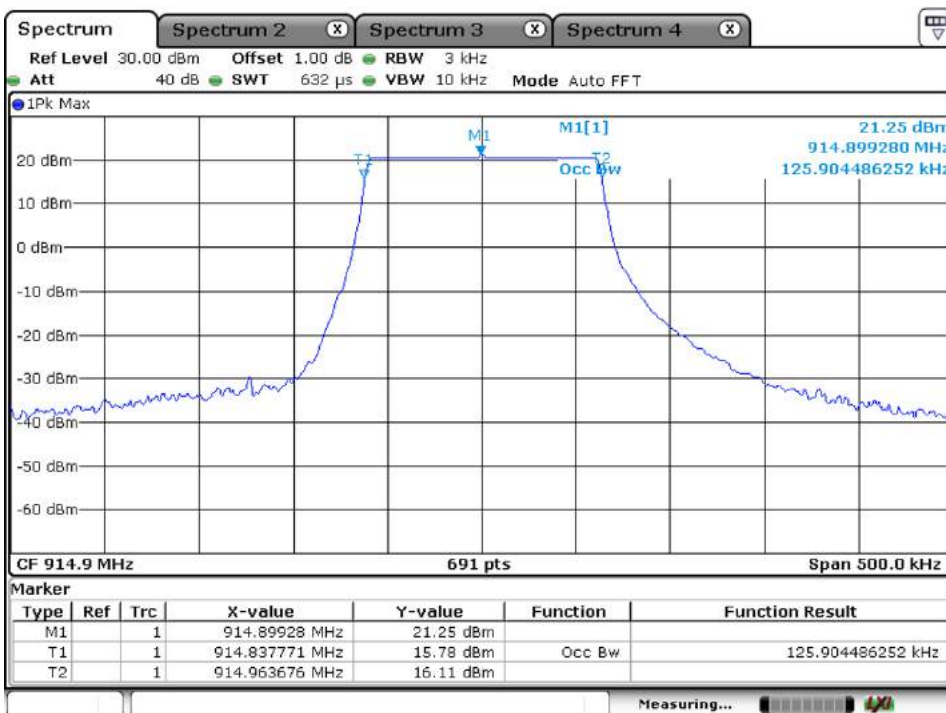

Date: 21.FEB.2022 09:31:36


Lora DTS

Low Channel

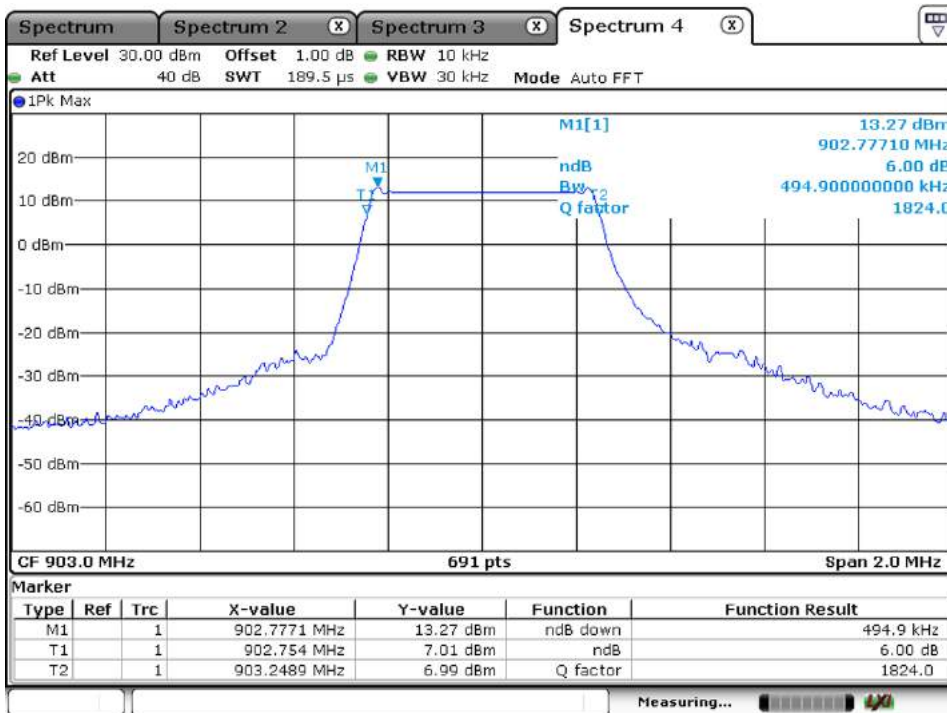


Date: 30.MAR.2022 08:08:47

Middle Channel

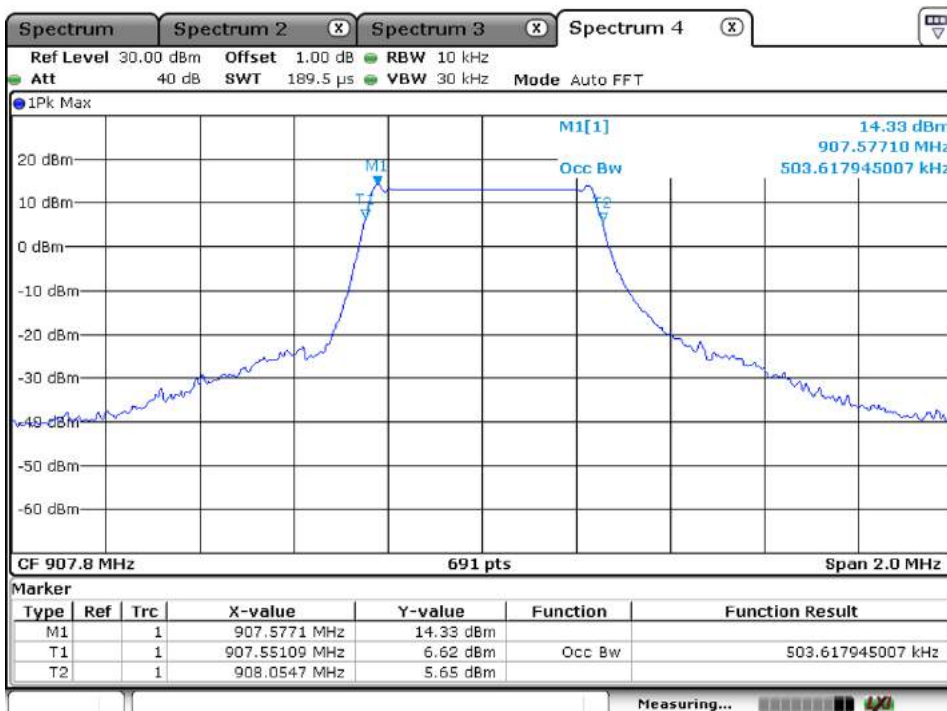

Date: 30.MAR.2022 08:05:08

High Channel

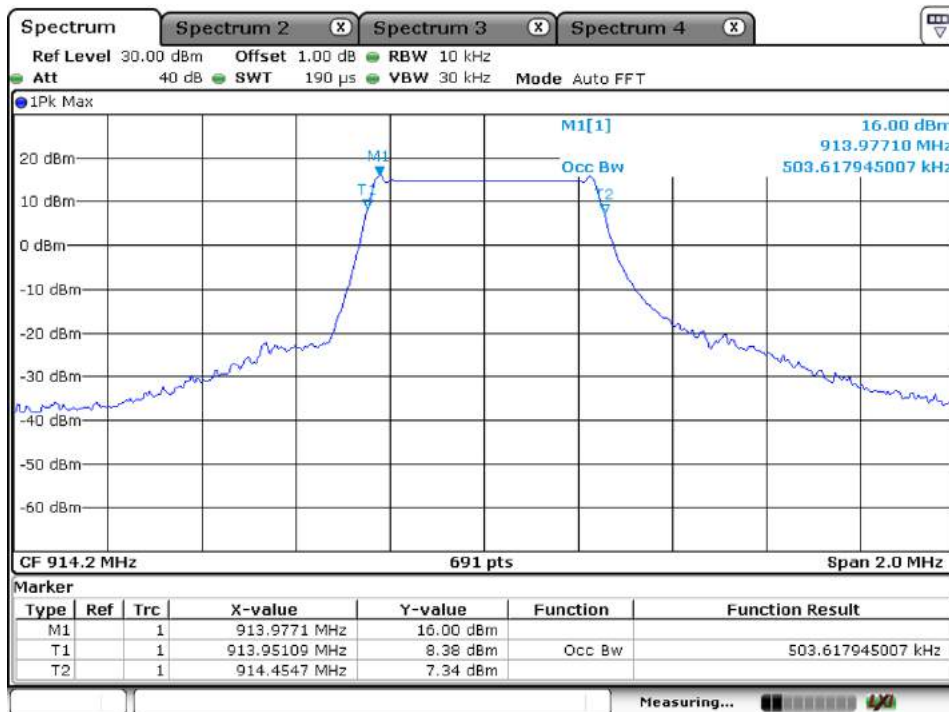


Date: 21.FEB.2022 08:25:42


### Appendix B.5: Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Lora DTS

Low Channel

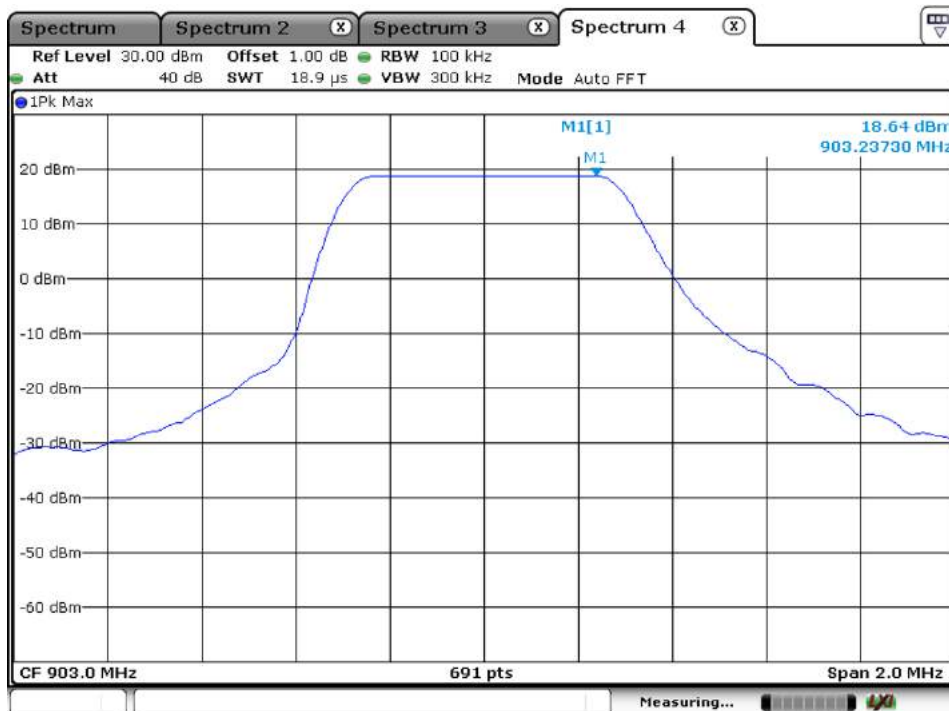

Date: 30.MAR.2022 08:08:16

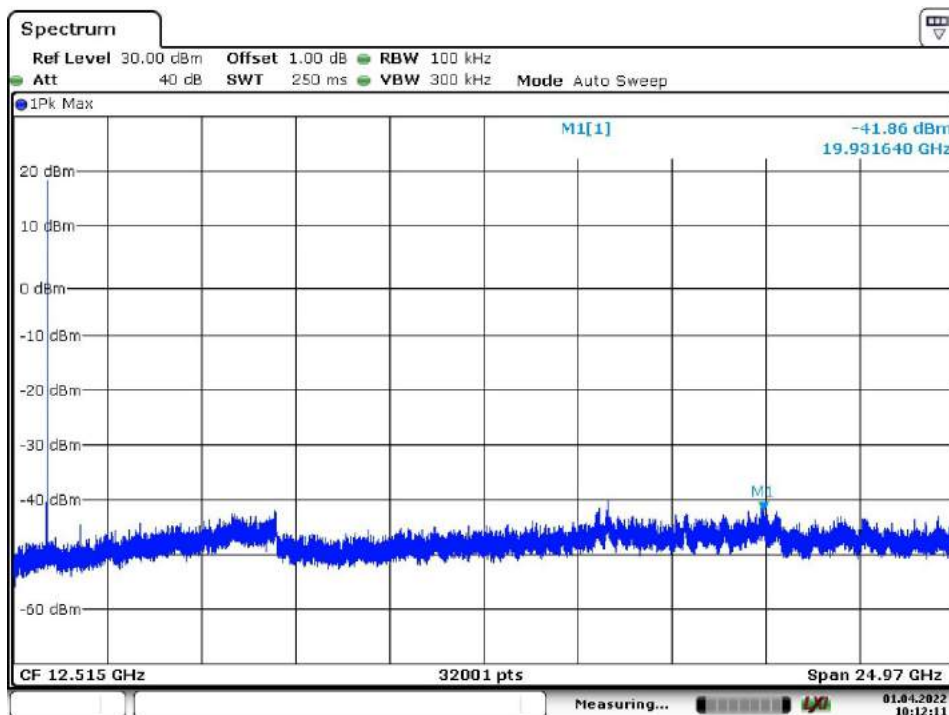


Date: 1.APR.2022 10:12:11



Middle Channel



Date: 30.MAR.2022 08:05:49

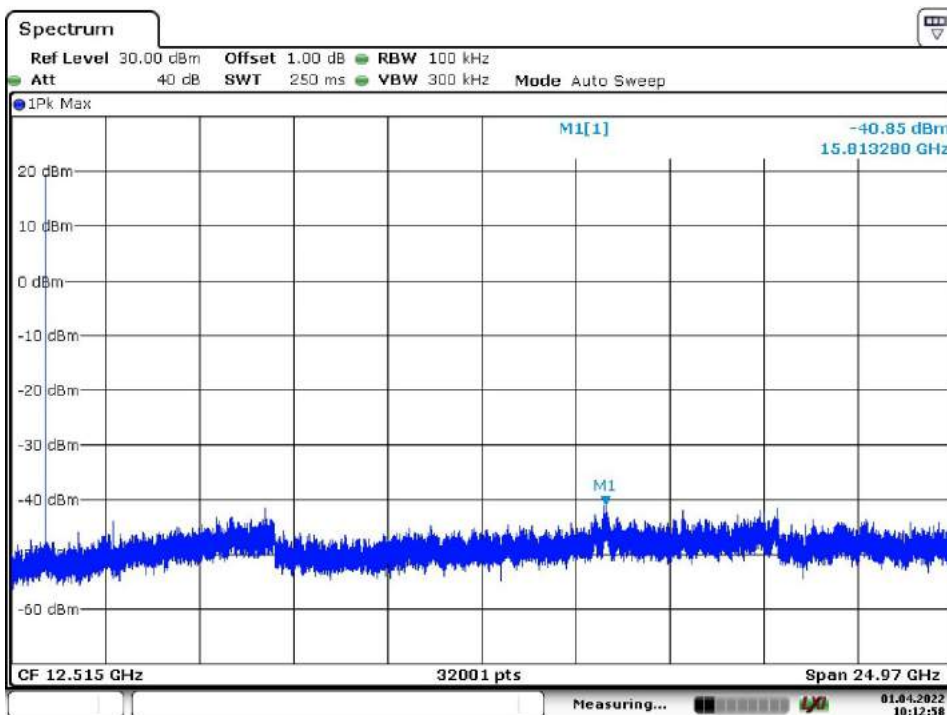


Date: 1.APR.2022 10:12:58

High Channel




Date: 21.FEB.2022 08:26:27

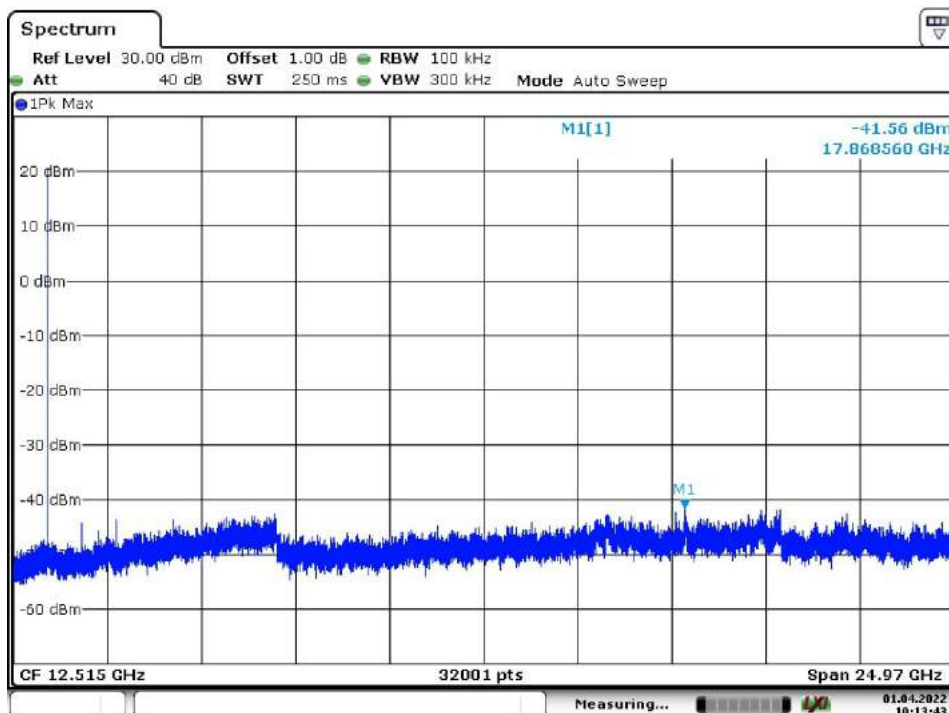


Date: 1.APR.2022 10:13:43



Lora FHSS, Data rate SF7, No hopping  
Low Channel

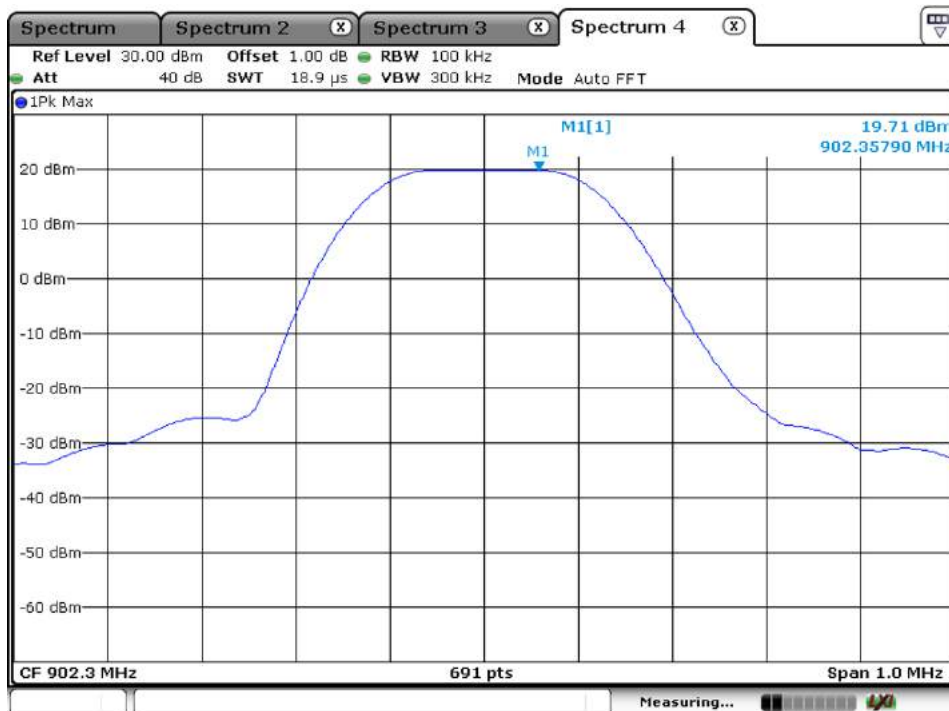


Date: 30.MAR.2022 08:20:11

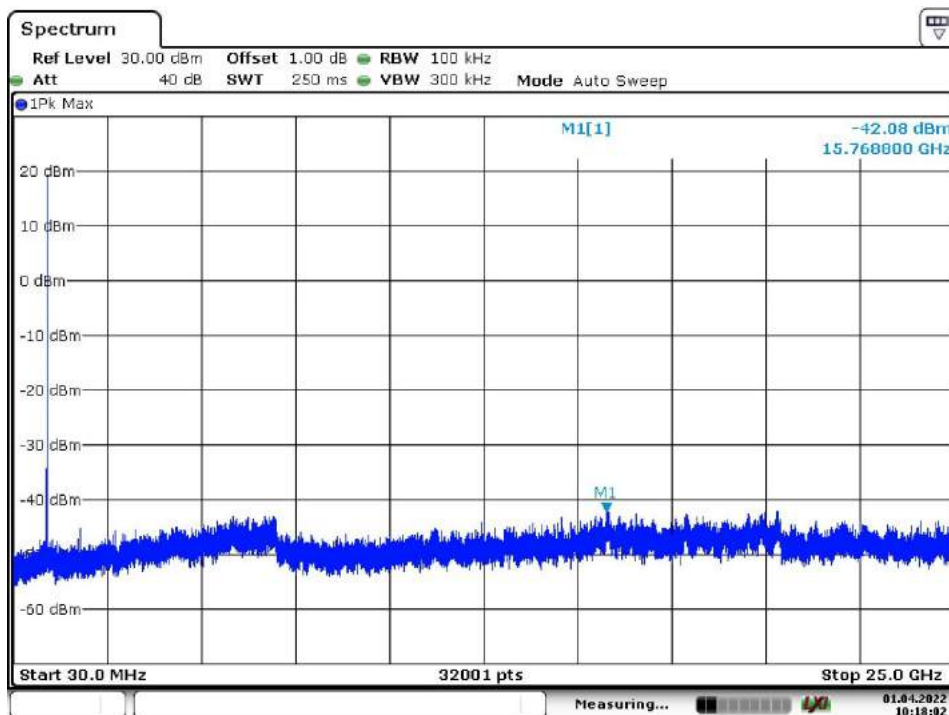


Date: 1.APR.2022 10:18:02

Middle Channel

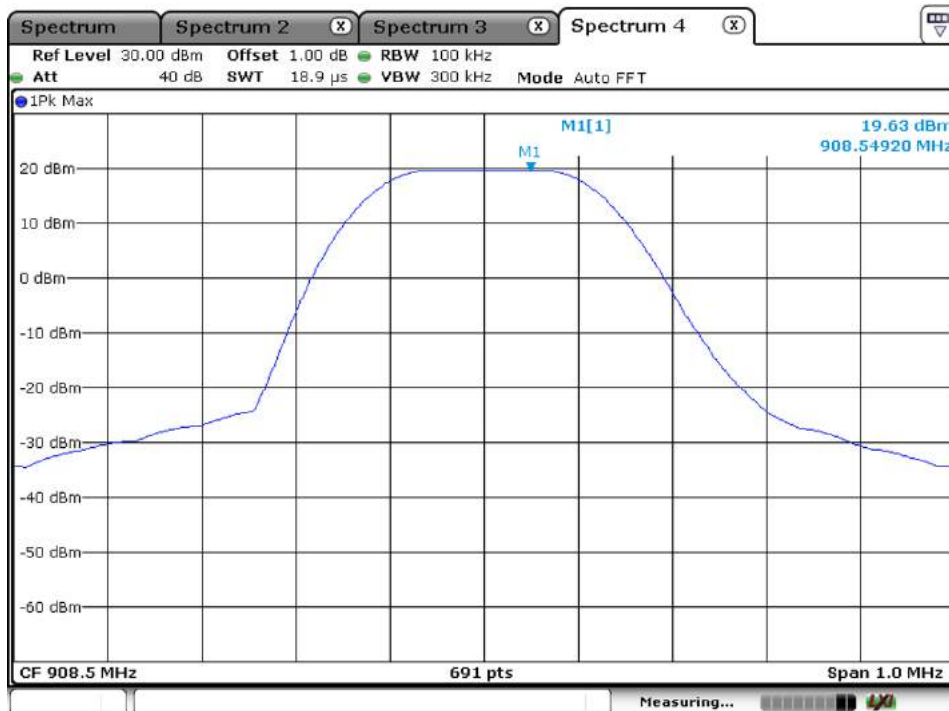


Date: 30.MAR.2022 08:23:24

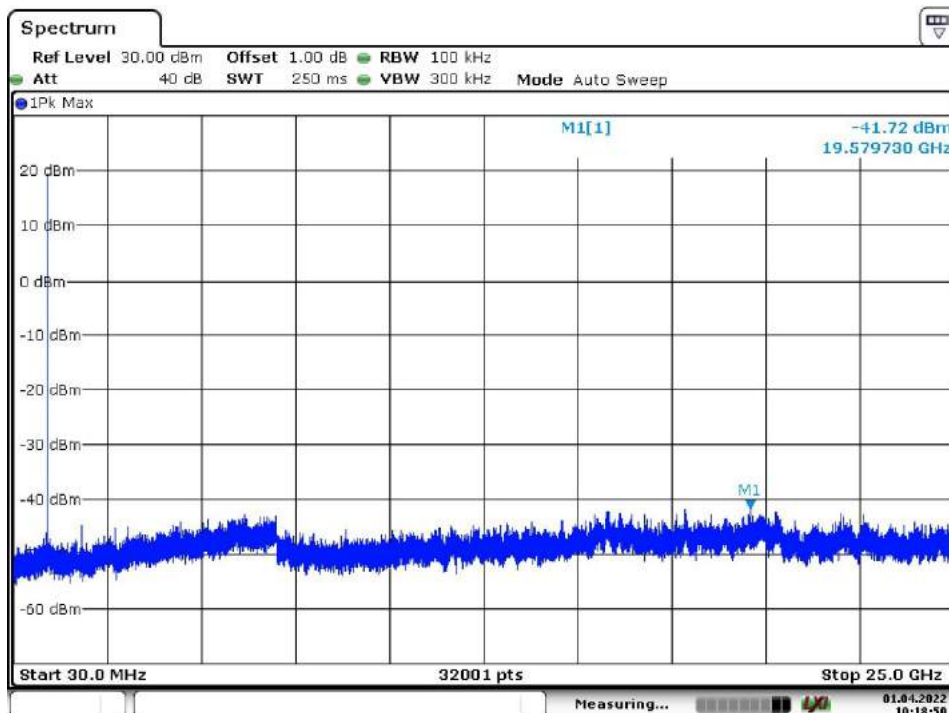


Date: 1.APR.2022 10:18:50

High Channel

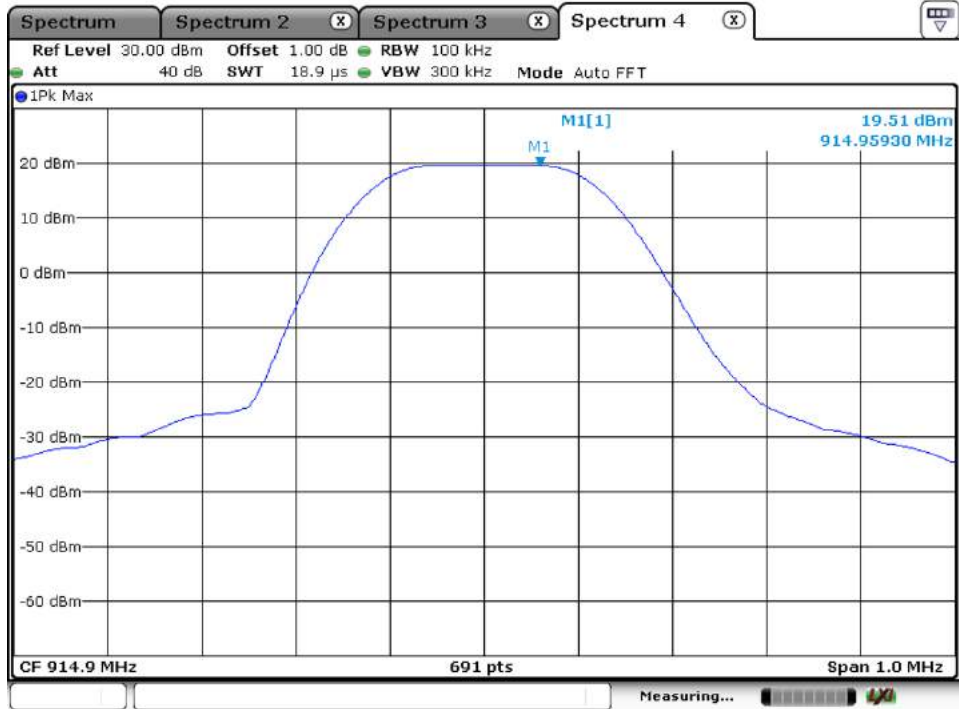

Date: 30.MAR.2022 08:23:52

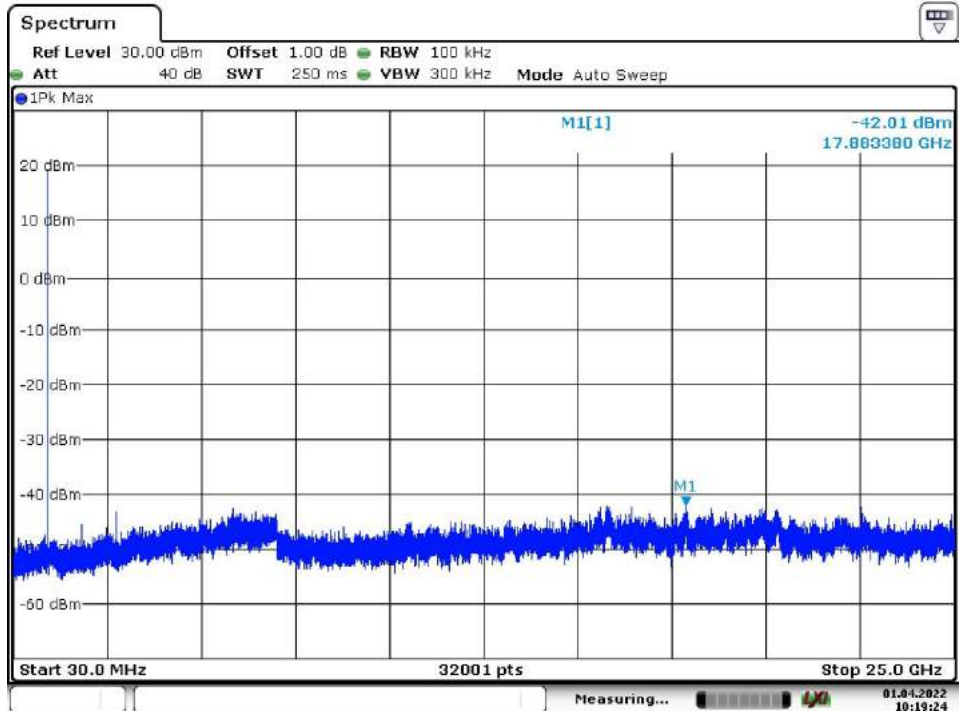


Date: 1.APR.2022 10:19:24

### Lora FHSS, Data rate SF10, No hopping

Low Channel



Date: 30.MAR.2022 08:34:03

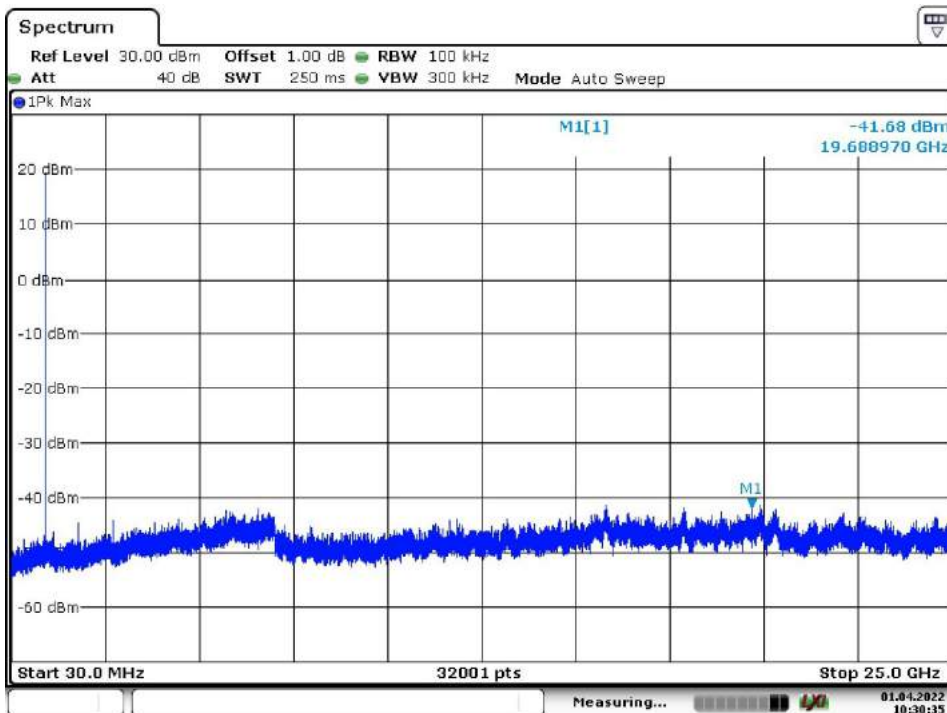


Date: 1.APR.2022 10:30:35

Middle Channel




Date: 30.MAR.2022 08:30:02

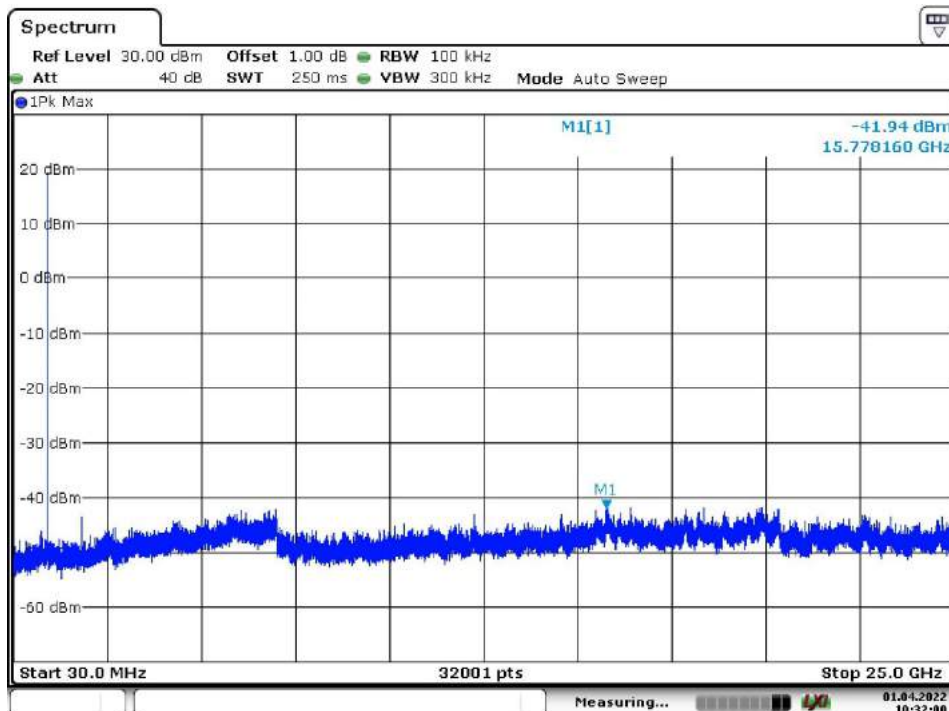


Date: 1.APR.2022 10:32:00

High Channel

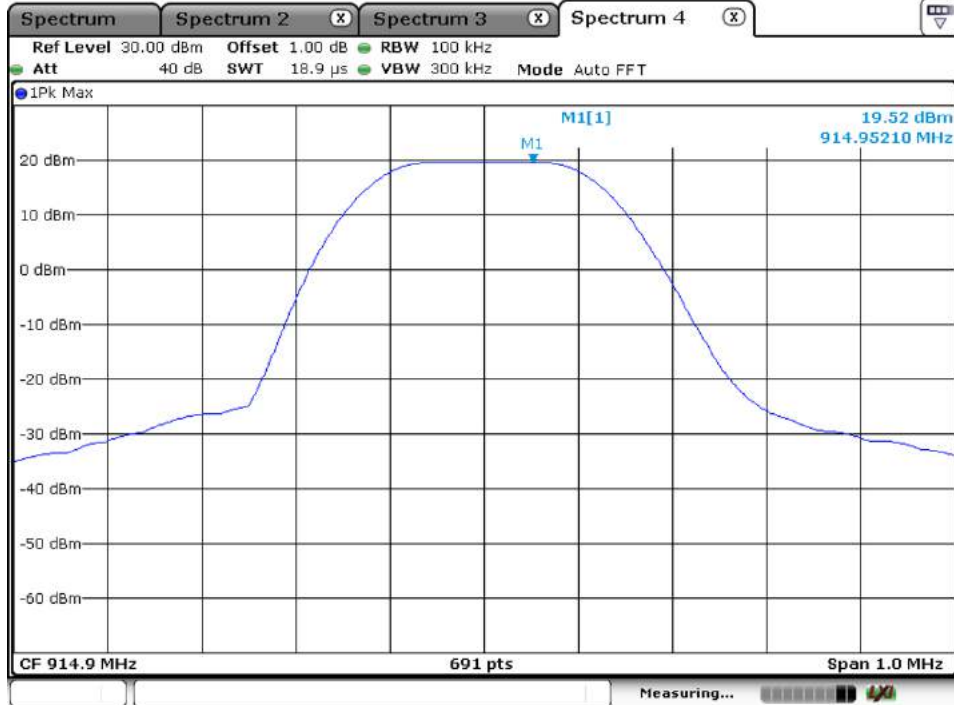


Date: 30.MAR.2022 08:27:06

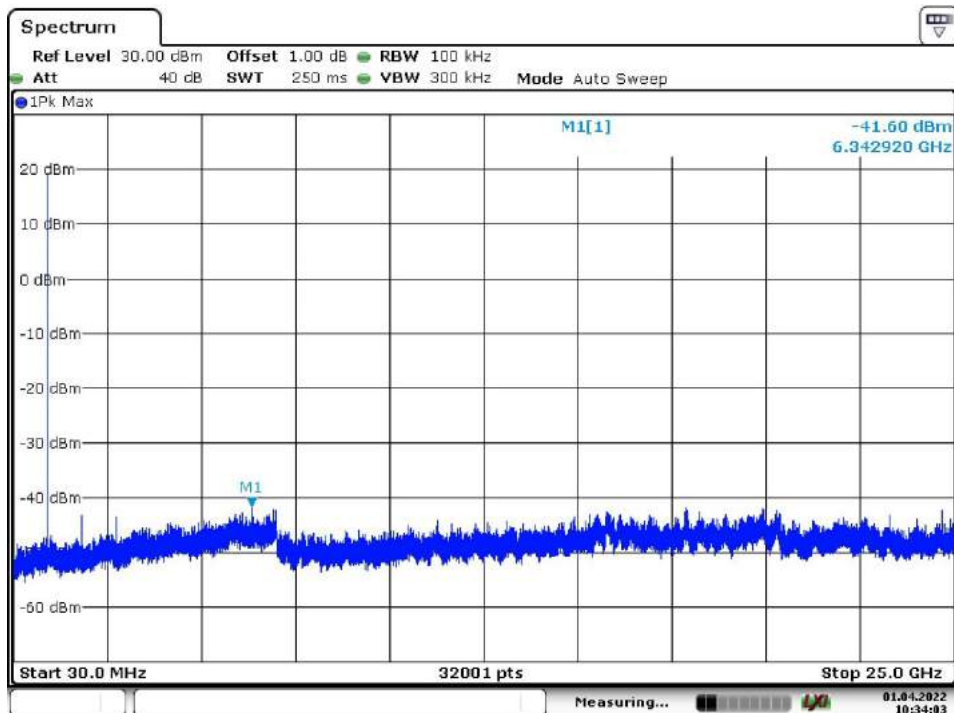


Date: 1.APR.2022 10:34:03

### Lora FHSS, Data rate SF7, hopping

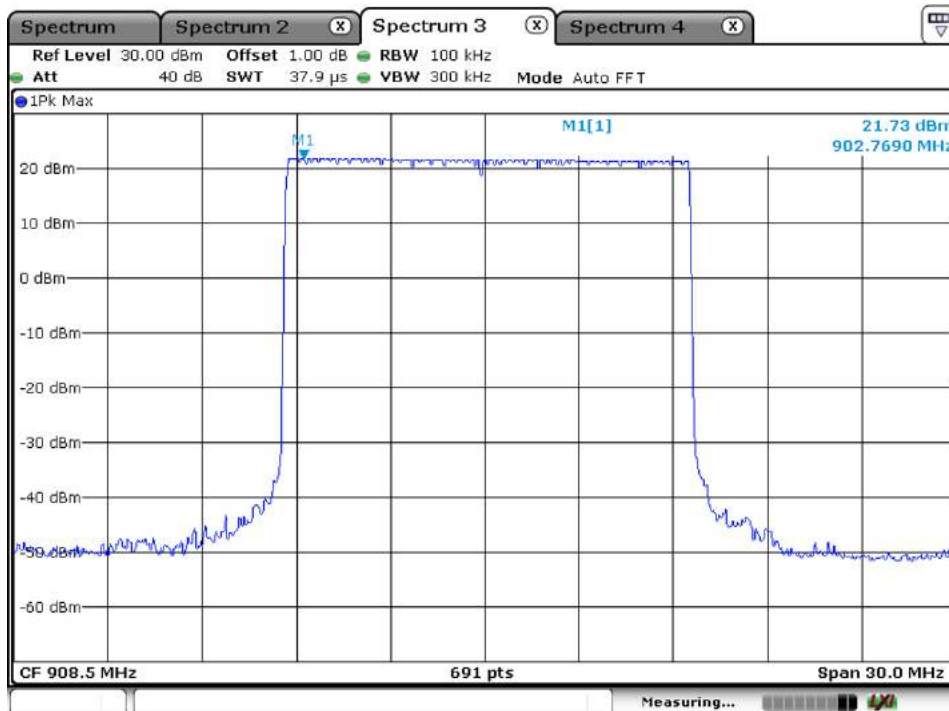


Date: 21.FEB.2022 09:39:27

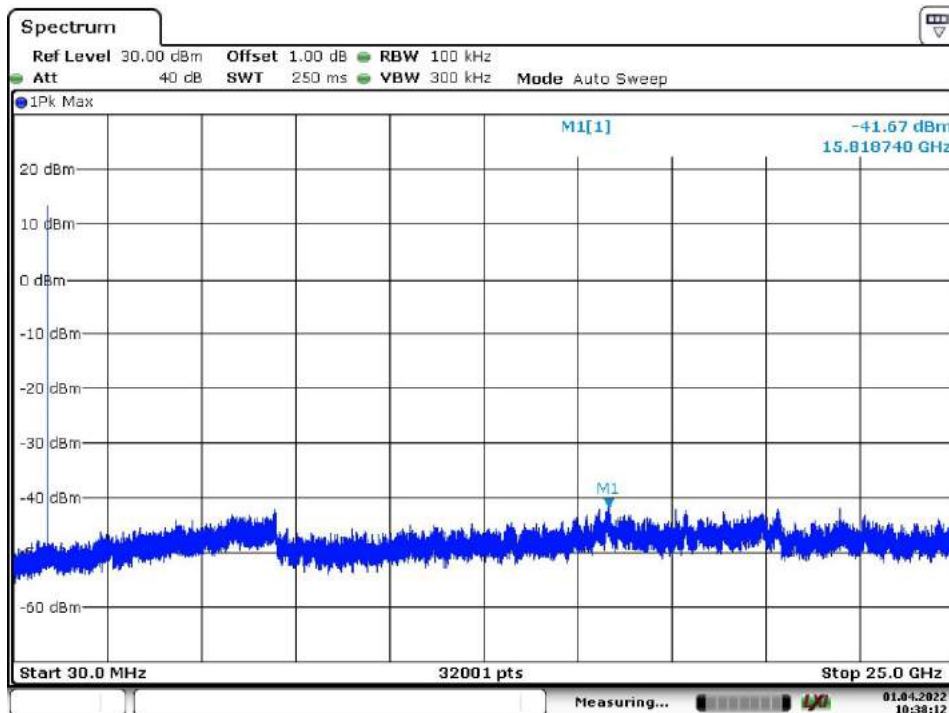


Date: 1.APR.2022 10:38:12



Lora FHSS, Data rate SF10, hopping

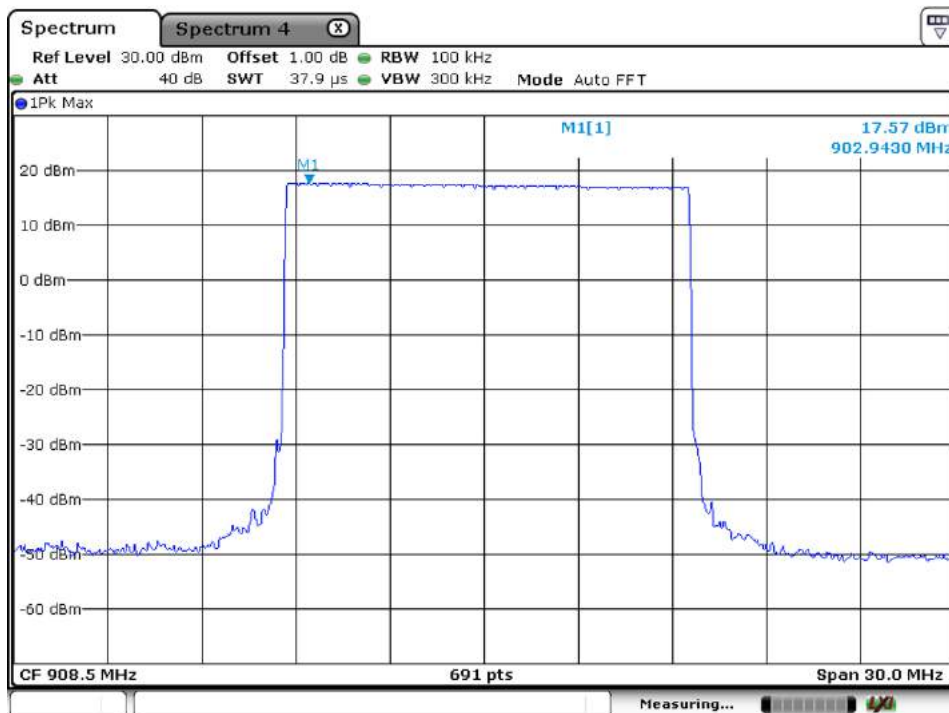

Date: 7.APR.2022 03:03:22

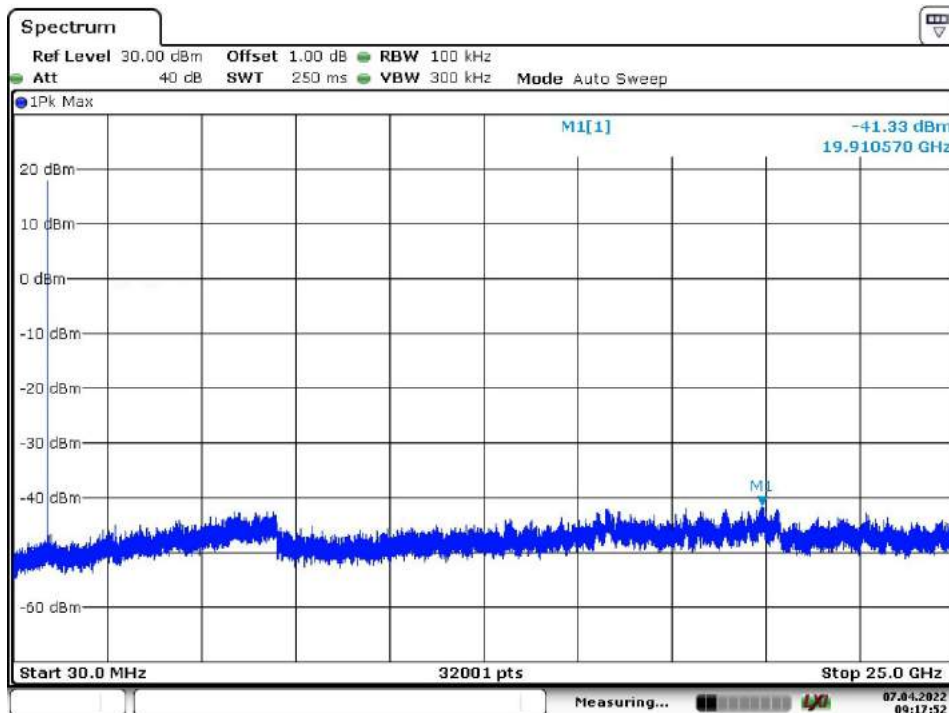


Date: 7.APR.2022 09:17:52




### Lora DTS, Band Edge

Low Channel

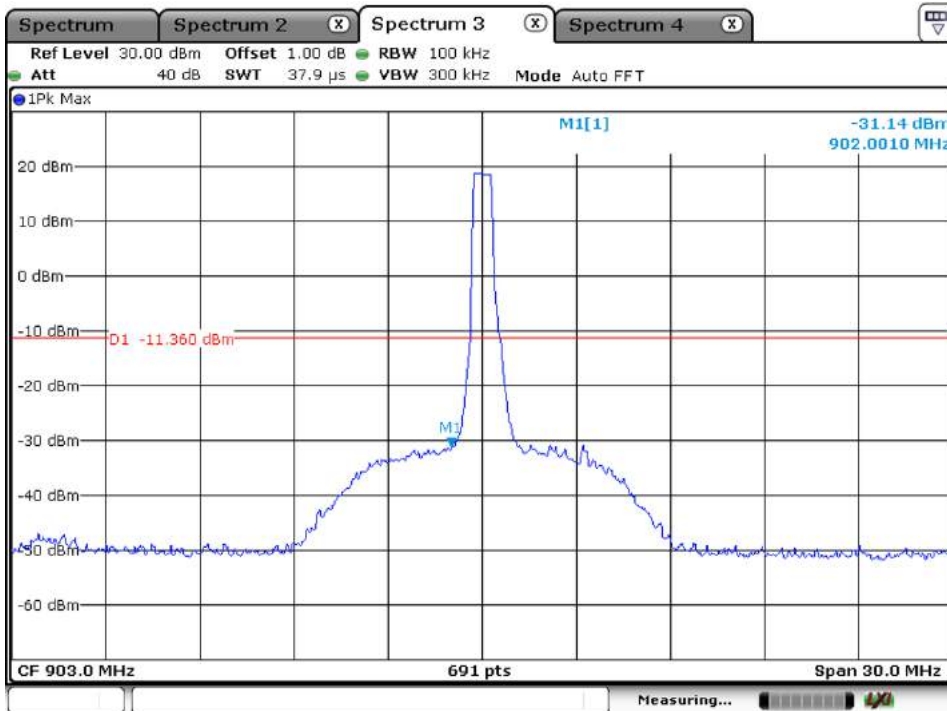


Date: 30.MAR.2022 08:09:48

High Channel

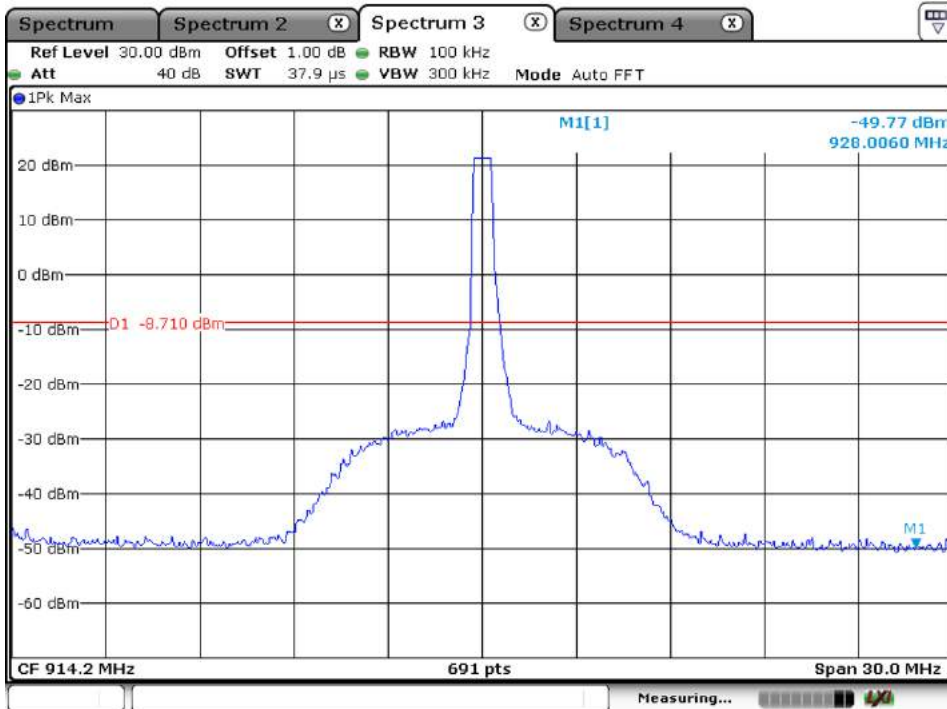


Date: 21.FEB.2022 08:28:14

Lora FHSS, Data rate SF7, No hopping, Band Edge  
Low Channel

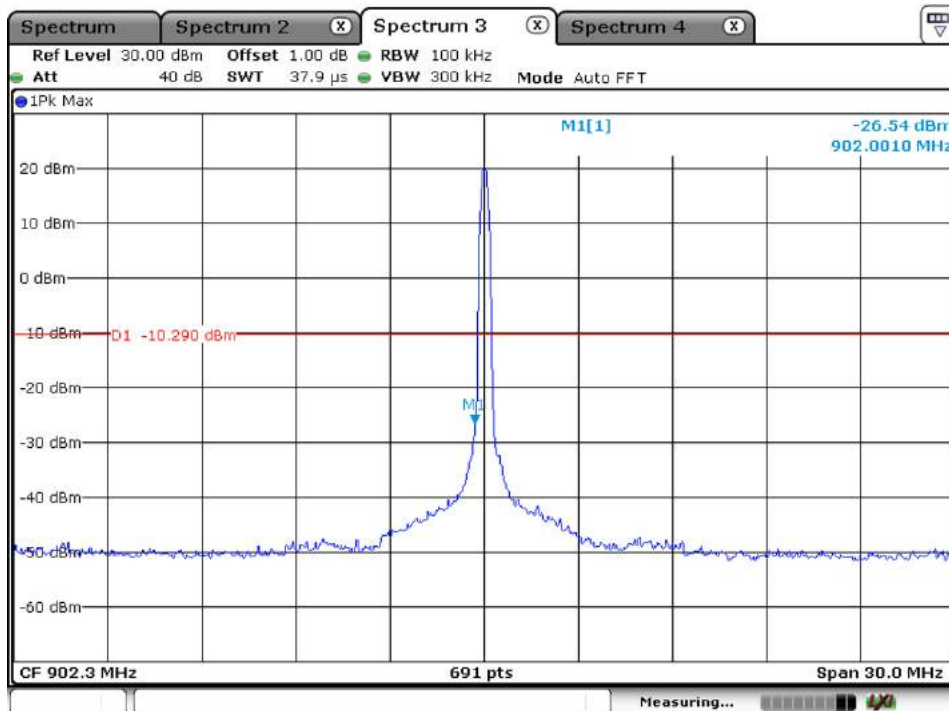


Date: 30.MAR.2022 08:20:56

High Channel

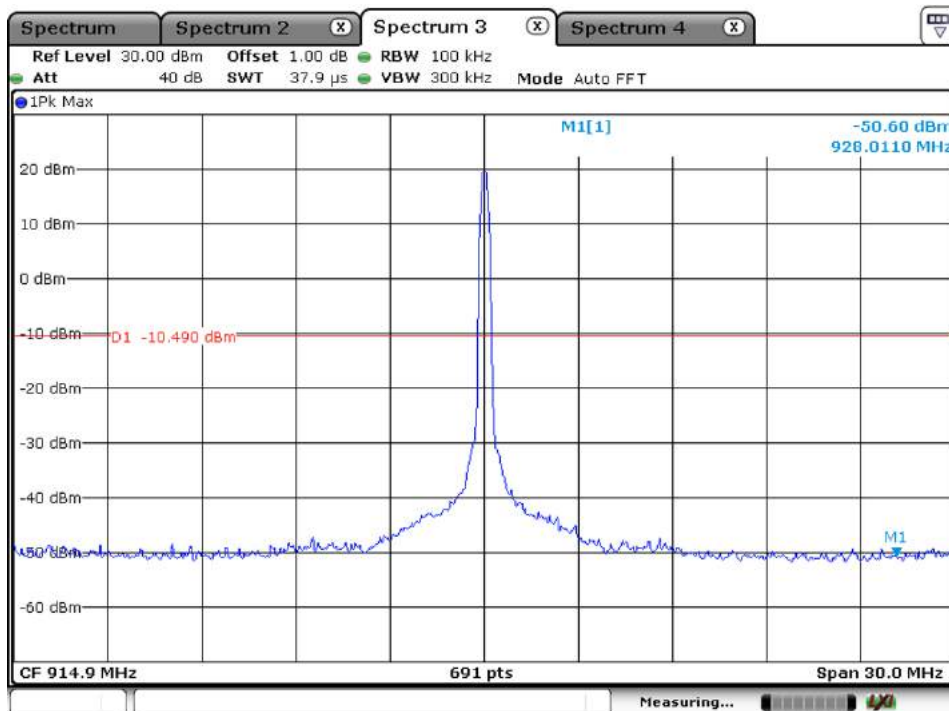


Date: 30.MAR.2022 08:28:59

Lora FHSS, Data rate SF10, No hopping, Band Edge  
Low Channel

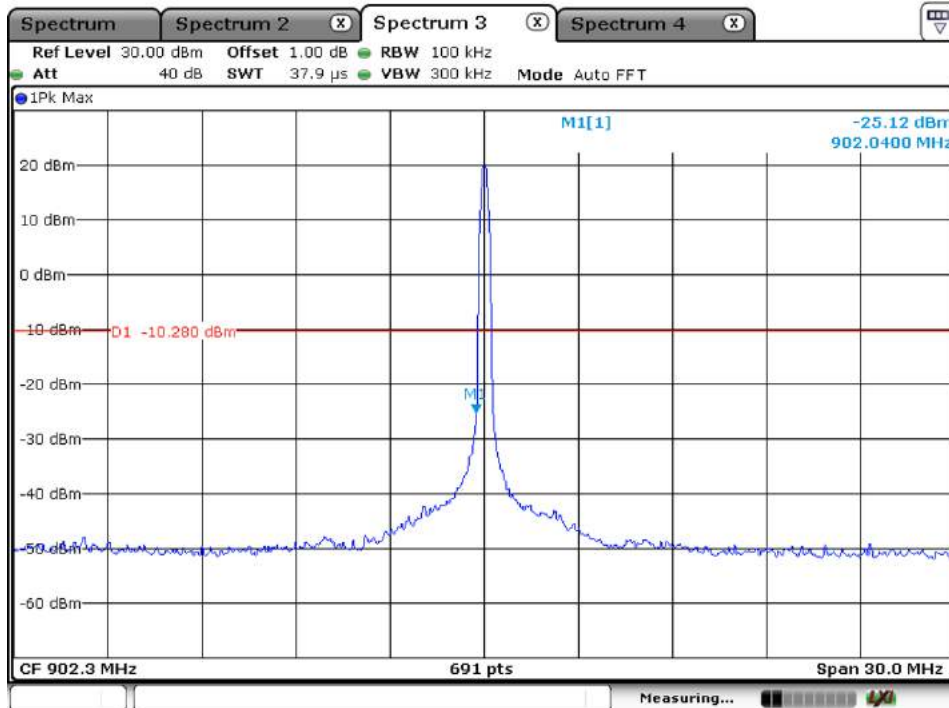


Date: 30.MAR.2022 08:34:50

High Channel

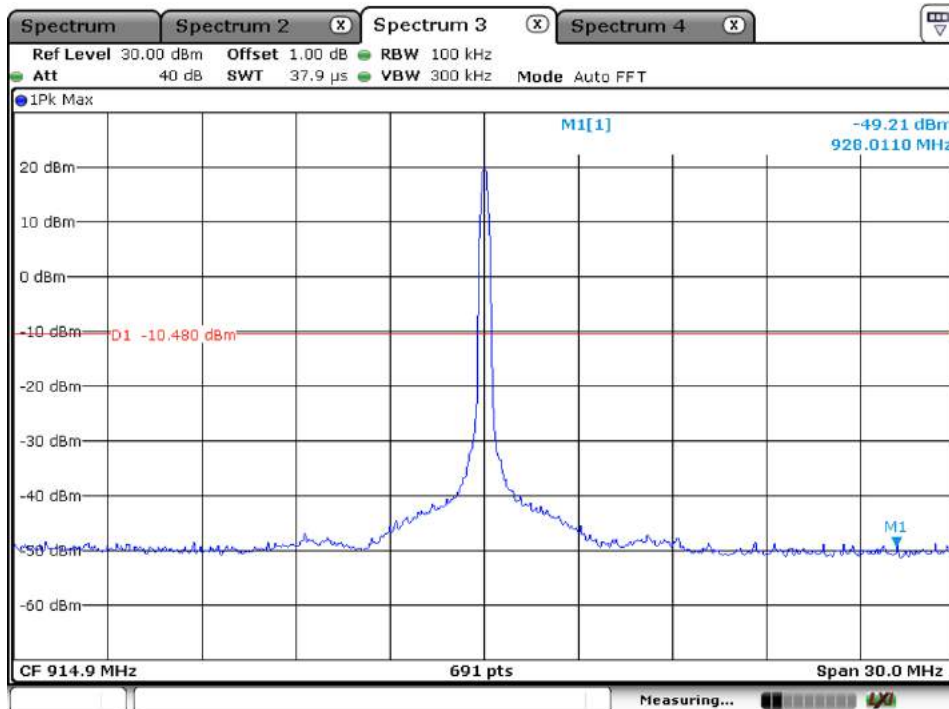


Date: 30.MAR.2022 08:28:11

### Lora FHSS, Data rate SF7, hopping, Band Edge

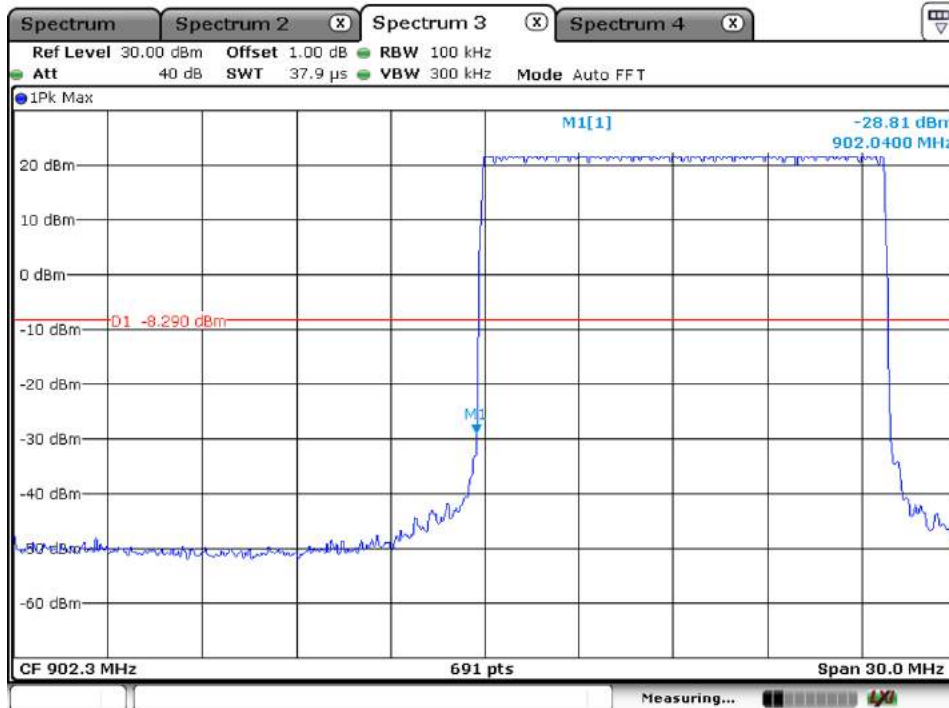


Date: 21.FEB.2022 09:41:02

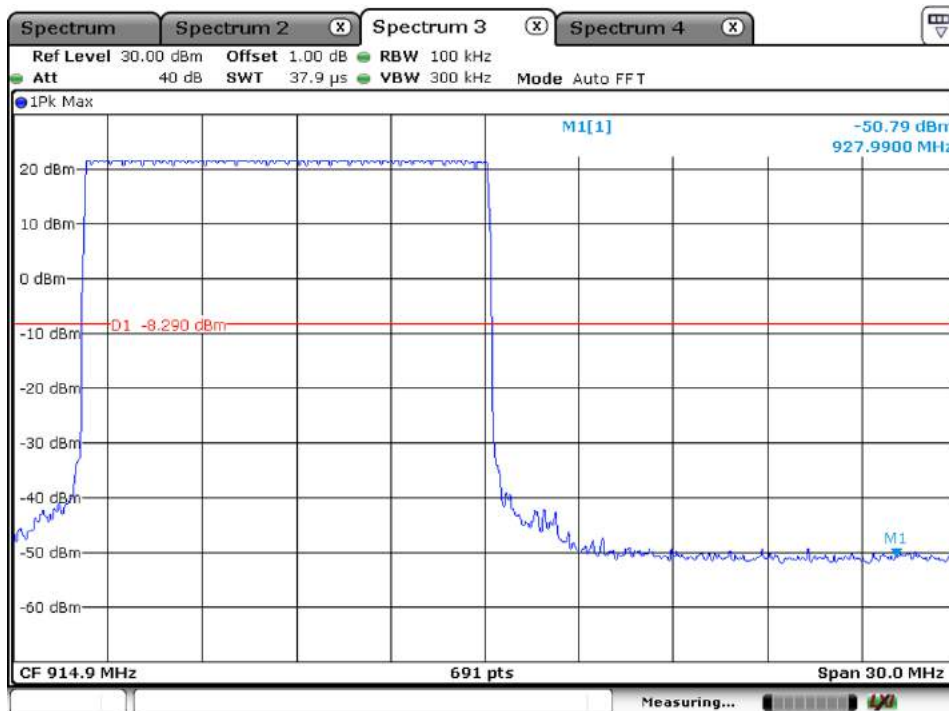


Date: 21.FEB.2022 09:42:07

Lora FHSS, Data rate SF10, hopping, Band Edge

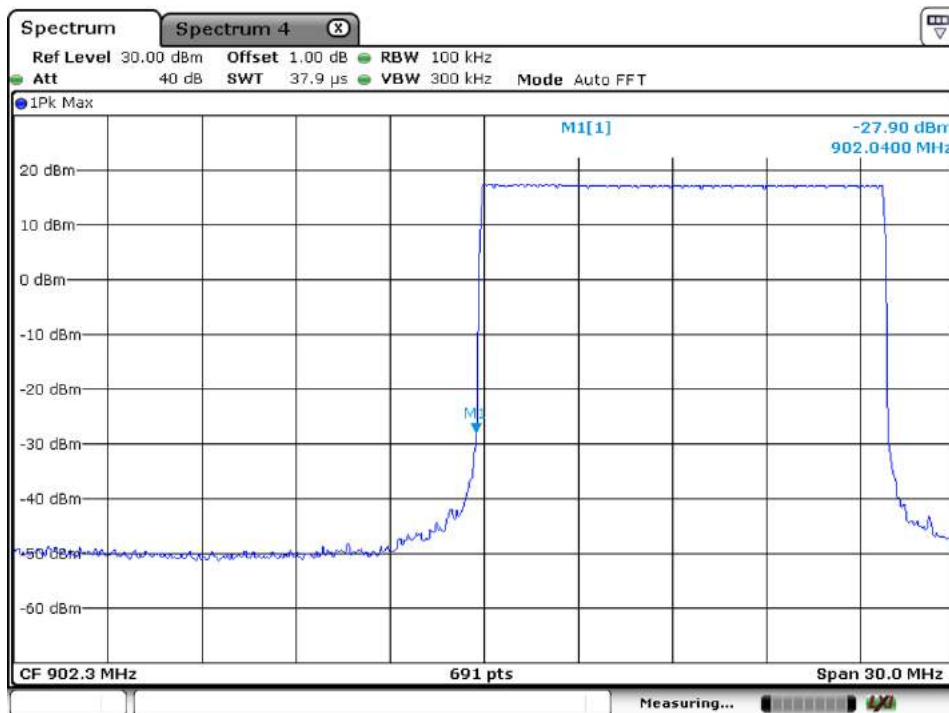

Date: 7.APR.2022 03:07:07

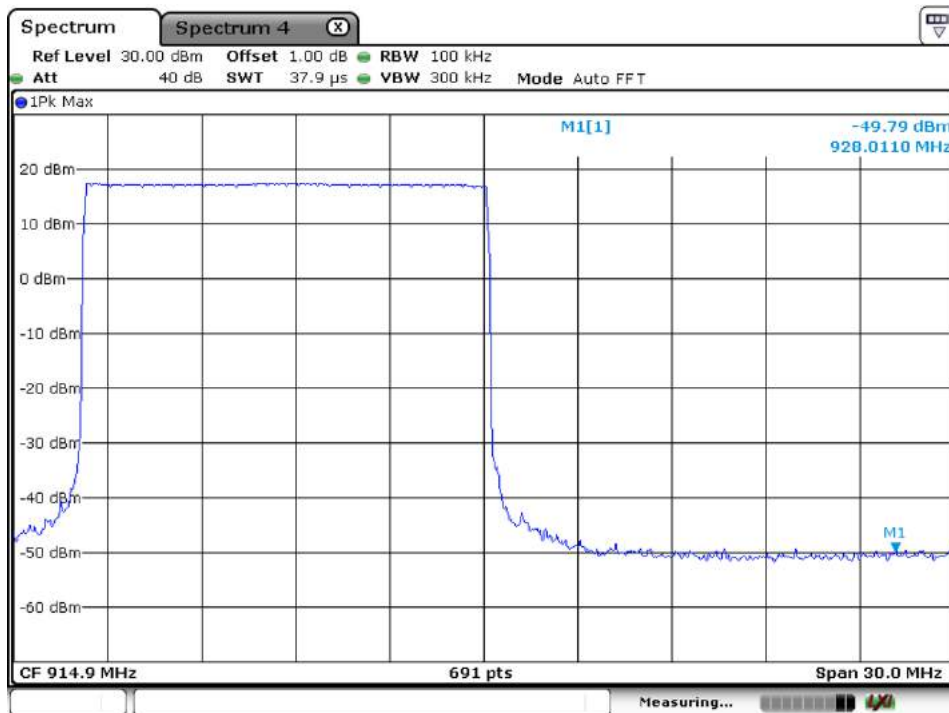


Date: 7.APR.2022 03:11:04

### Appendix B.6: Carrier Frequency Separation


#### Lora FHSS, Data rate SF7

##### Low Channel

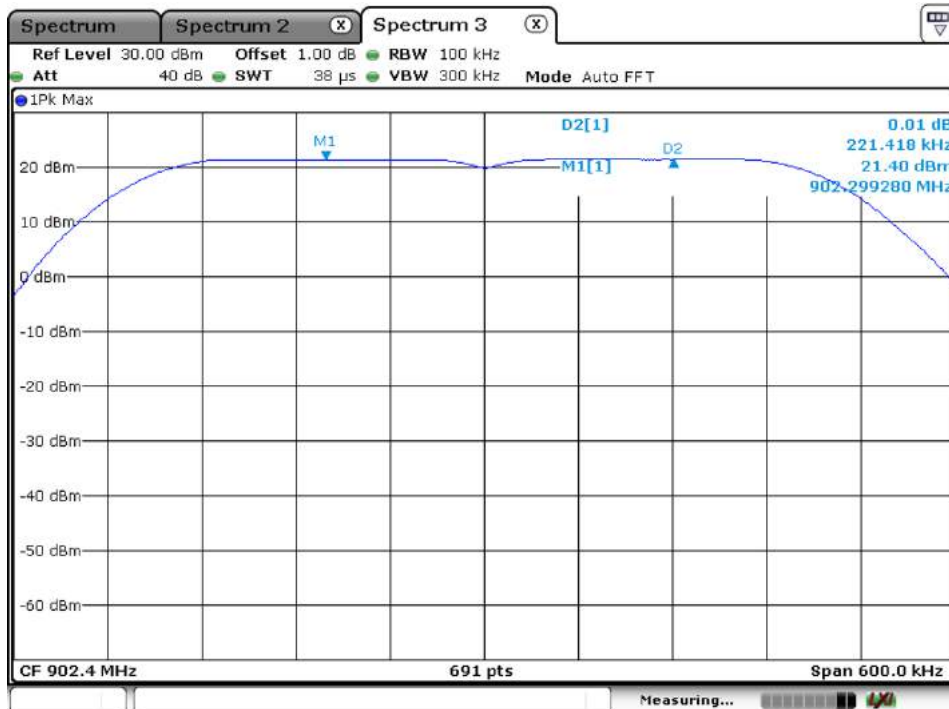


Date: 21.FEB.2022 06:55:42

##### Middle Channel

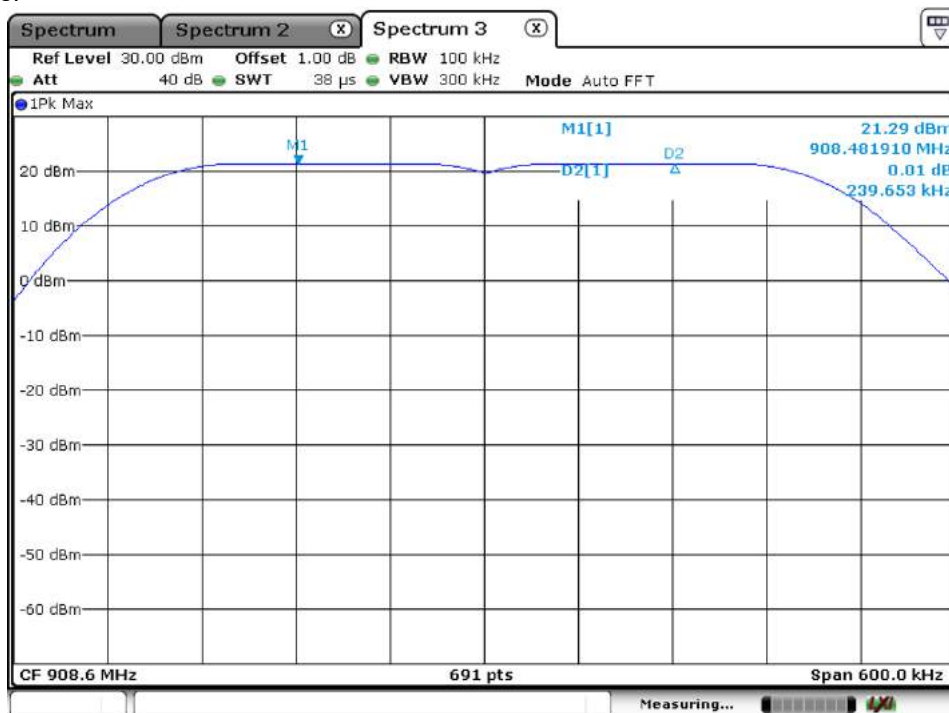

Date: 21.FEB.2022 06:54:19


High Channel

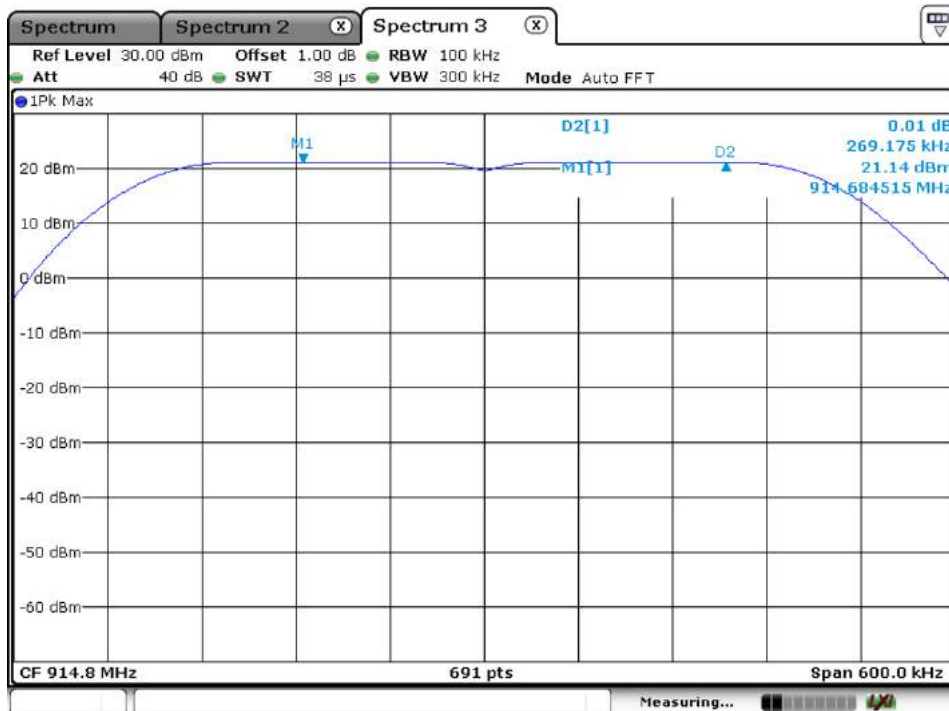

Date: 21.FEB.2022 06:53:13

Lora FHSS, Data rate SF10


Low Channel

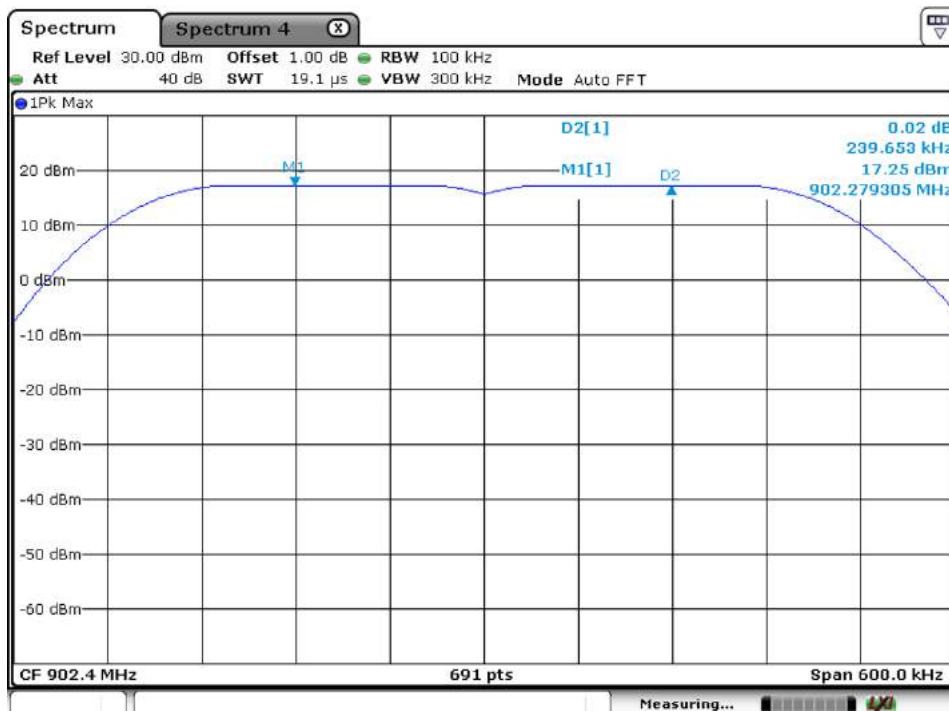

Date: 7.APR.2022 03:24:13




Middle Channel

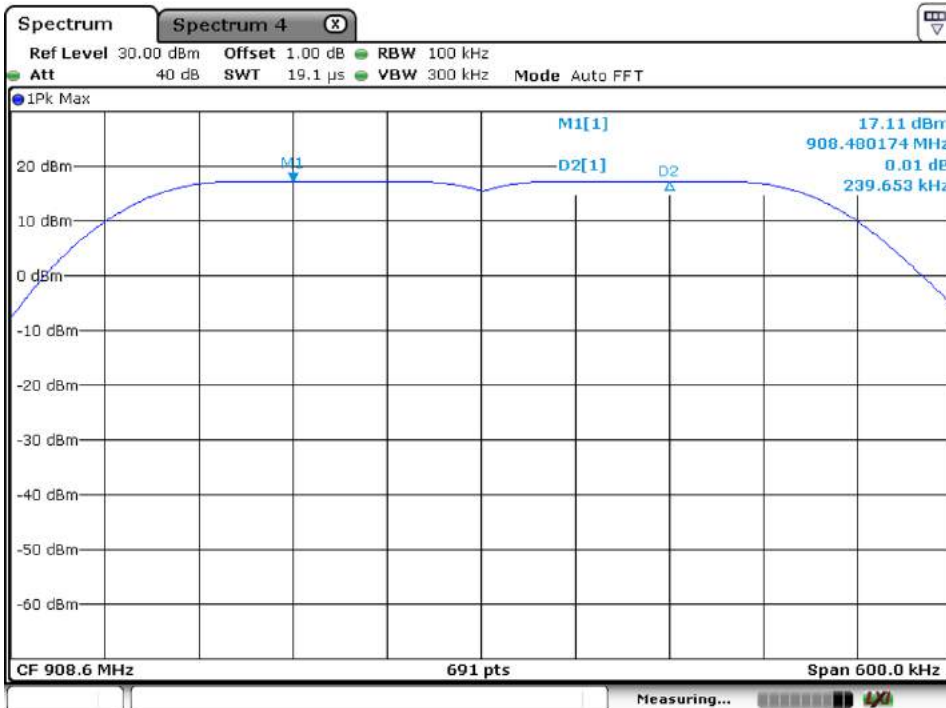

Date: 7.APR.2022 03:23:34

High Channel

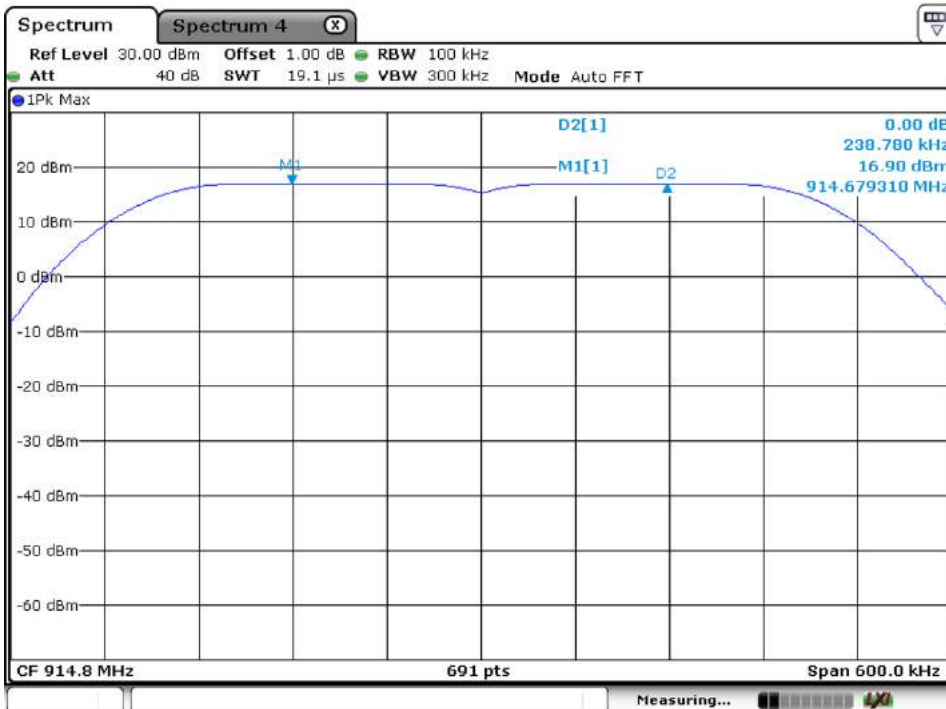

Date: 7.APR.2022 03:24:56




Note 1: Testing was carried out within frequency range 9 kHz to the tenth harmonics. The measurement results below 30MHz and above 18GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

## Appendix B.7: Test Results of Radiated Spurious Emissions

Lora FHSS SF7, Antenna Gain: 0.8dBi

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_902.3MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

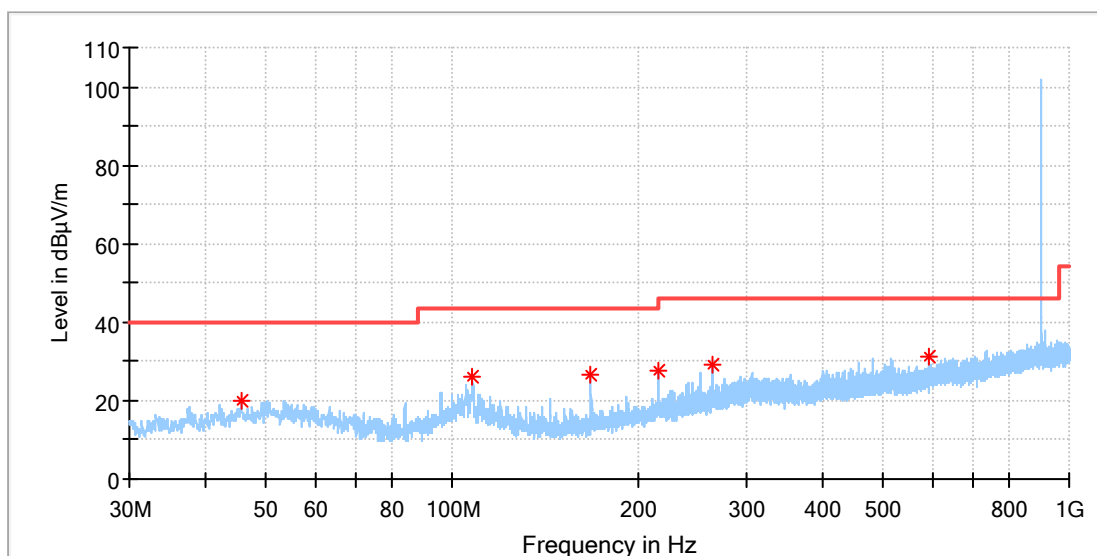


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.617000	20.08	40.00	19.92	100.0	H	264.0	-18.7
107.939500	26.28	43.50	17.22	100.0	H	123.0	-18.9
168.031000	26.82	43.50	16.68	100.0	H	279.0	-21.3
215.997500	27.54	43.50	15.96	100.0	H	211.0	-18.7
264.061000	29.41	46.00	16.59	100.0	H	198.0	-17.0
590.708500	30.96	46.00	15.04	100.0	H	250.0	-10.0

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_902.3MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

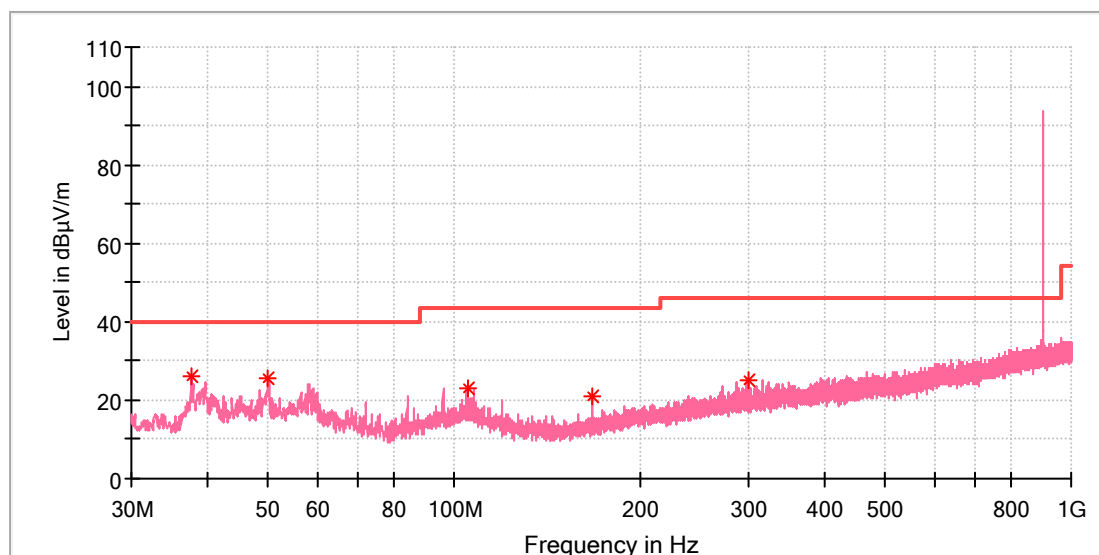


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.517500	26.12	40.00	13.88	100.0	V	3.0	-21.0
50.030500	25.73	40.00	14.27	100.0	V	233.0	-18.3
104.981000	23.16	43.50	20.34	100.0	V	212.0	-18.7
167.982500	20.89	43.50	22.61	100.0	V	23.0	-21.3
300.727000	25.09	46.00	20.91	100.0	V	287.0	-16.3

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_908.5MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

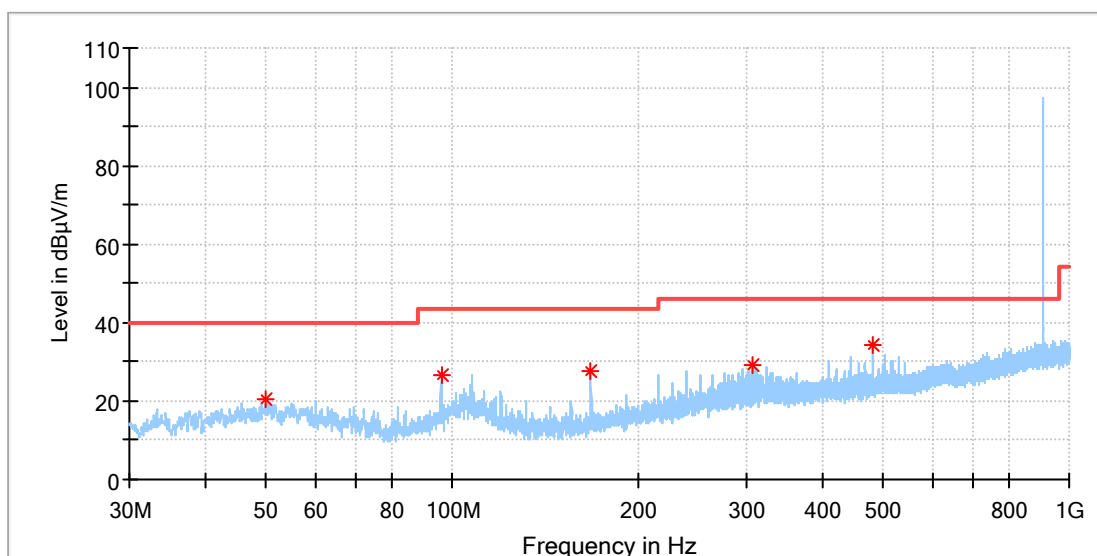


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.030500	20.67	40.00	19.33	100.0	H	268.0	-18.3
96.008500	26.72	43.50	16.78	100.0	H	307.0	-19.6
168.031000	27.69	43.50	15.81	100.0	H	285.0	-21.3
305.819500	29.20	46.00	16.80	100.0	H	189.0	-16.1
480.031500	34.13	46.00	11.87	100.0	H	227.0	-12.2

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_908.5MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

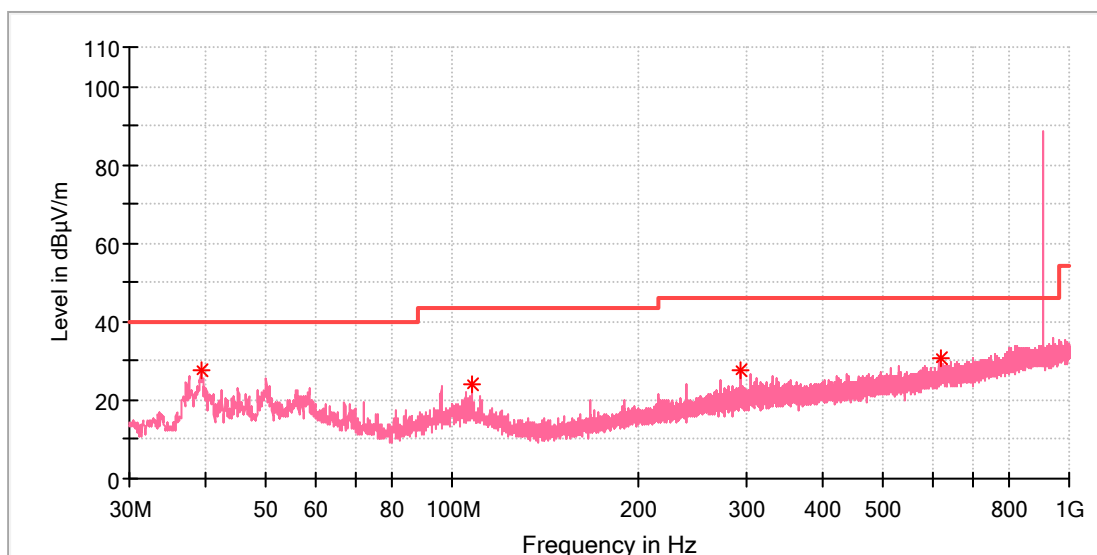


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
39.215000	27.81	40.00	12.19	100.0	V	150.0	-20.4
107.939500	24.02	43.50	19.48	100.0	V	214.0	-18.9
292.773000	27.46	46.00	18.54	100.0	V	317.0	-16.5
619.178000	30.70	46.00	15.30	100.0	V	0.0	-9.5

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_914.9MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

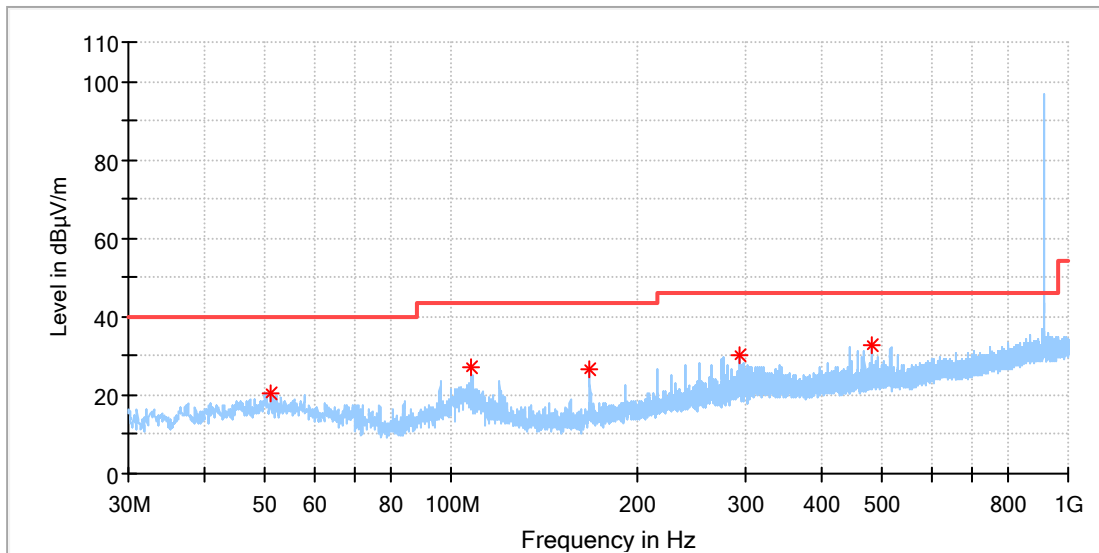


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
51.049000	20.70	40.00	19.30	100.0	H	76.0	-18.3
107.939500	27.31	43.50	16.19	100.0	H	144.0	-18.9
168.031000	26.75	43.50	16.75	100.0	H	270.0	-21.3
293.694500	30.24	46.00	15.76	100.0	H	281.0	-16.5
480.031500	32.96	46.00	13.04	100.0	H	223.0	-12.2

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_914.9MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

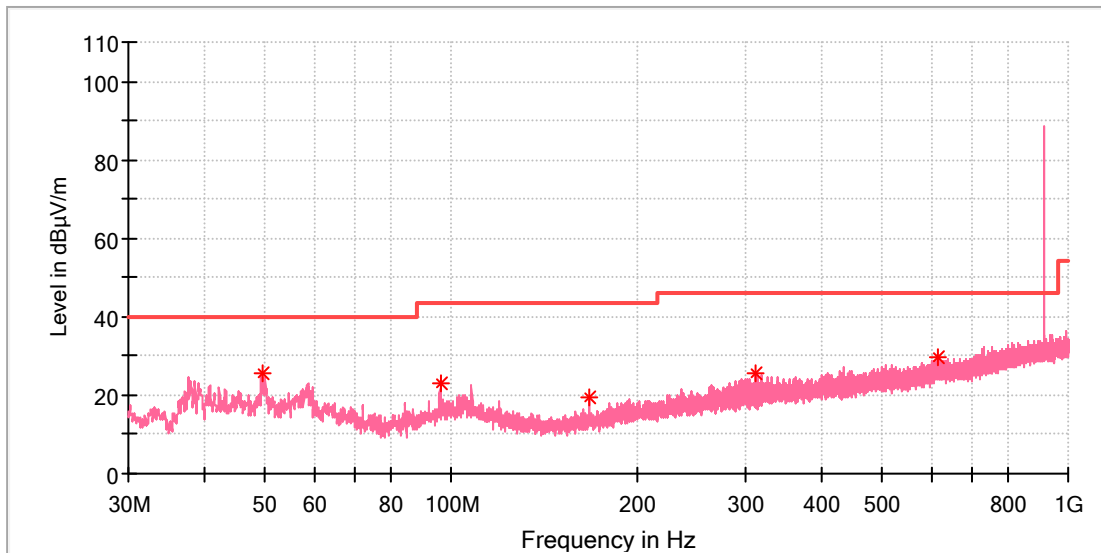


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.351500	25.40	40.00	14.60	100.0	V	0.0	-18.3
96.057000	22.85	43.50	20.65	100.0	V	236.0	-19.6
168.031000	19.55	43.50	23.95	100.0	V	353.0	-21.3
310.475500	25.71	46.00	20.29	100.0	V	264.0	-15.9
615.298000	29.81	46.00	16.19	100.0	V	229.0	-9.6

### EUT Information

EUT Name: WisDuo LPWAN Module  
 Model: RAK11300  
 Test Mode: FHSS 125K\_SF7\_902.3MHz  
 Order No/Sample No: 168358590/A003207710-003  
 Test Voltage:: DC 5V From USB  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

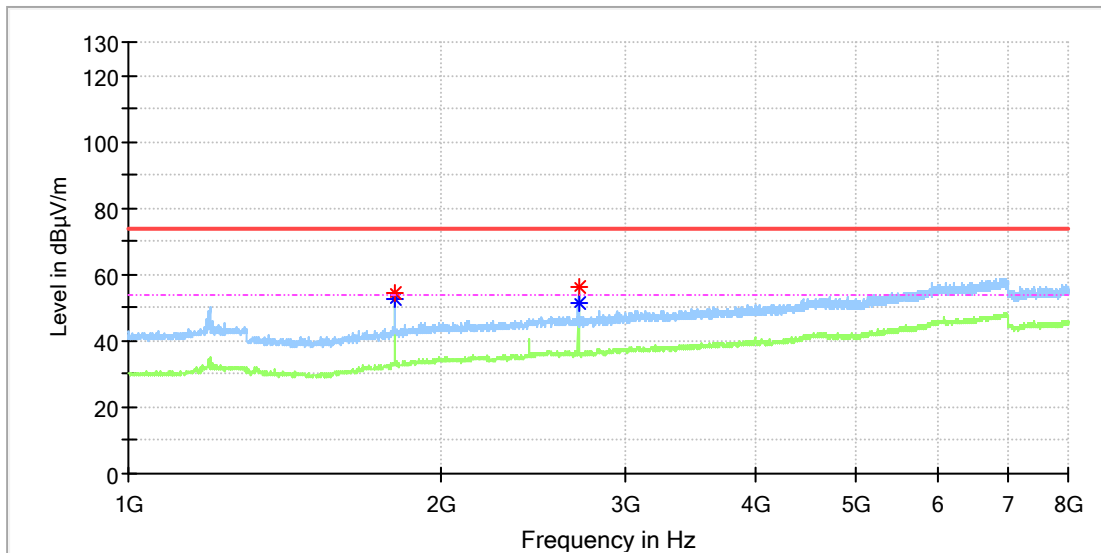


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1804.175000	54.34	---	74.00	19.66	100.0	H	227.0	4.7
1804.175000	---	52.42	54.00	1.58	100.0	H	227.0	4.7
2706.162500	56.50	---	74.00	17.50	100.0	H	1.0	7.5
2706.162500	---	51.69	54.00	2.31	100.0	H	1.0	7.5

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_902.3MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

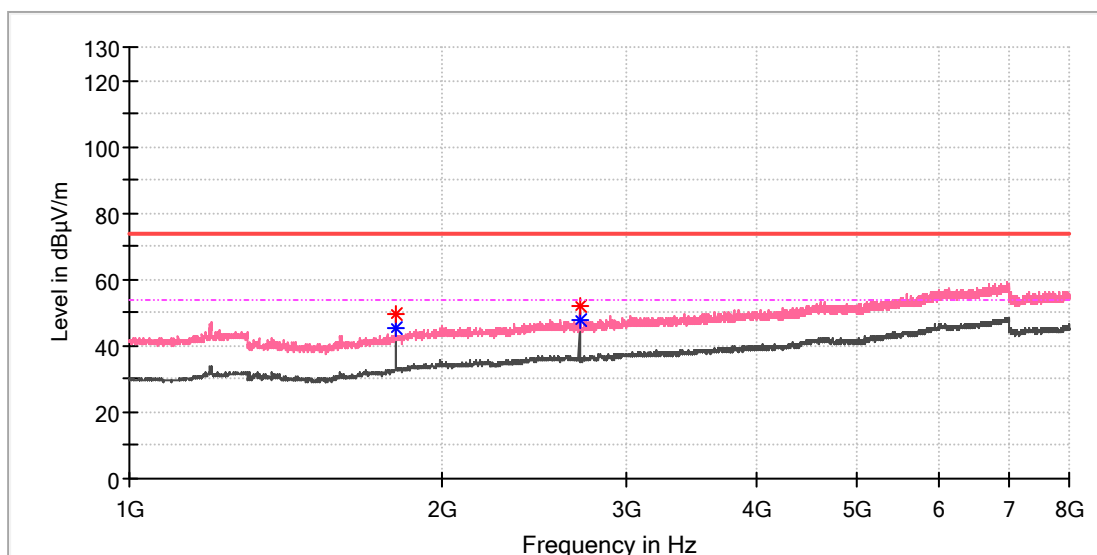


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1804.175000	49.34	---	74.00	24.66	100.0	V	201.0	4.7
1804.175000	---	45.53	54.00	8.47	100.0	V	201.0	4.7
2707.000000	52.10	---	74.00	21.90	100.0	V	323.0	7.6
2707.000000	---	47.97	54.00	6.03	100.0	V	323.0	7.6



## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_908.5MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

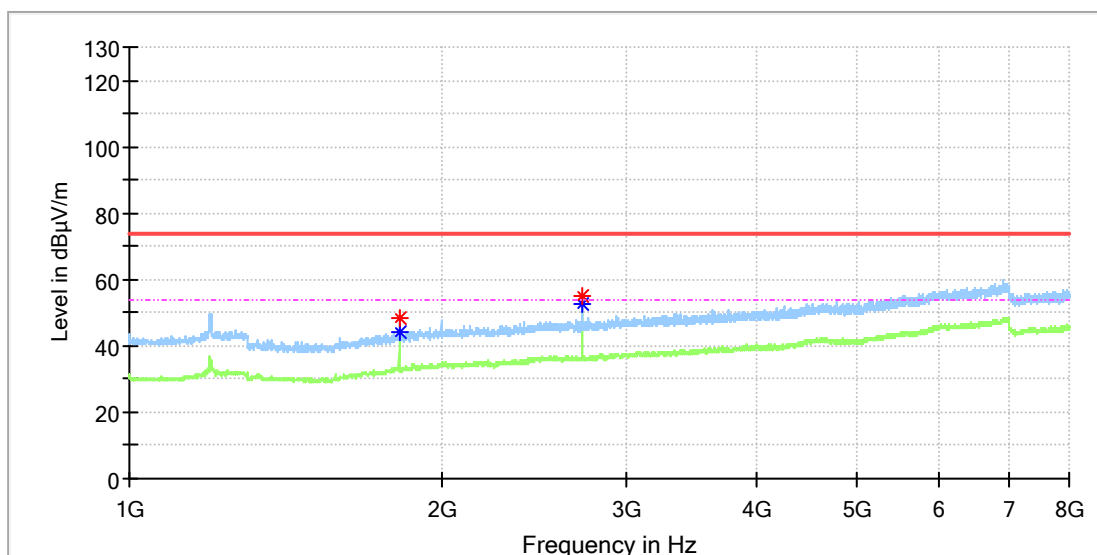


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1816.737500	48.58	---	74.00	25.42	100.0	H	213.0	4.8
1816.737500	---	44.32	54.00	9.68	100.0	H	213.0	4.8
2725.425000	55.24	---	74.00	18.76	100.0	H	0.0	7.7
2725.425000	---	52.11	54.00	1.89	100.0	H	0.0	7.7

### EUT Information

EUT Name: WisDuo LPWAN Module  
 Model: RAK11300  
 Test Mode: FHSS 125K\_SF7\_908.5MHz  
 Order No/Sample No: 168358590/A003207710-003  
 Test Voltage:: DC 5V From USB  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

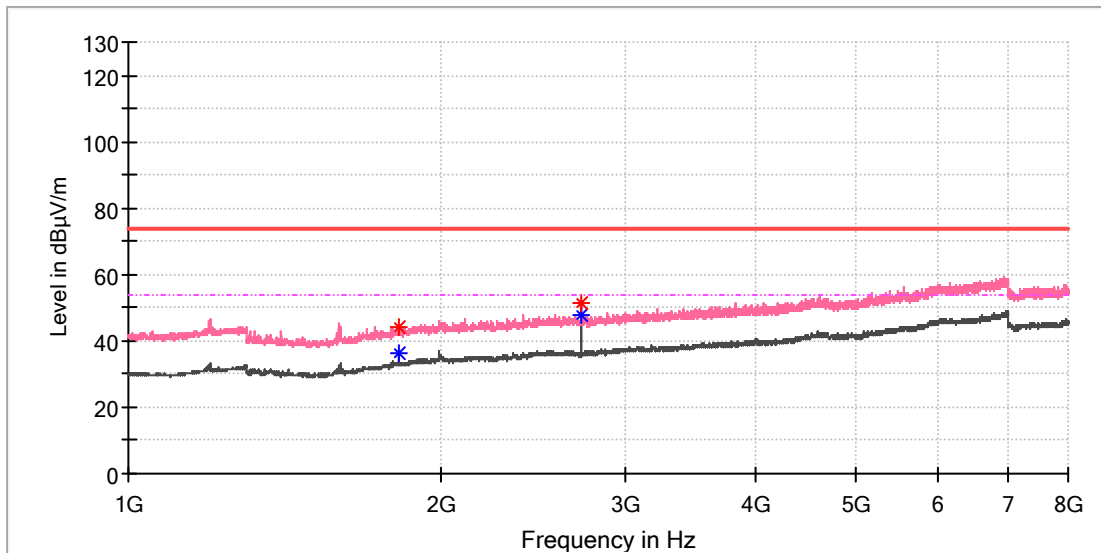


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1815.900000	44.16	---	74.00	29.84	100.0	V	46.0	4.8
1816.737500	---	36.17	54.00	17.83	100.0	V	245.0	4.8
2725.425000	51.40	---	74.00	22.60	100.0	V	211.0	7.7
2725.425000	---	47.86	54.00	6.14	100.0	V	211.0	7.7

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_914.9MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

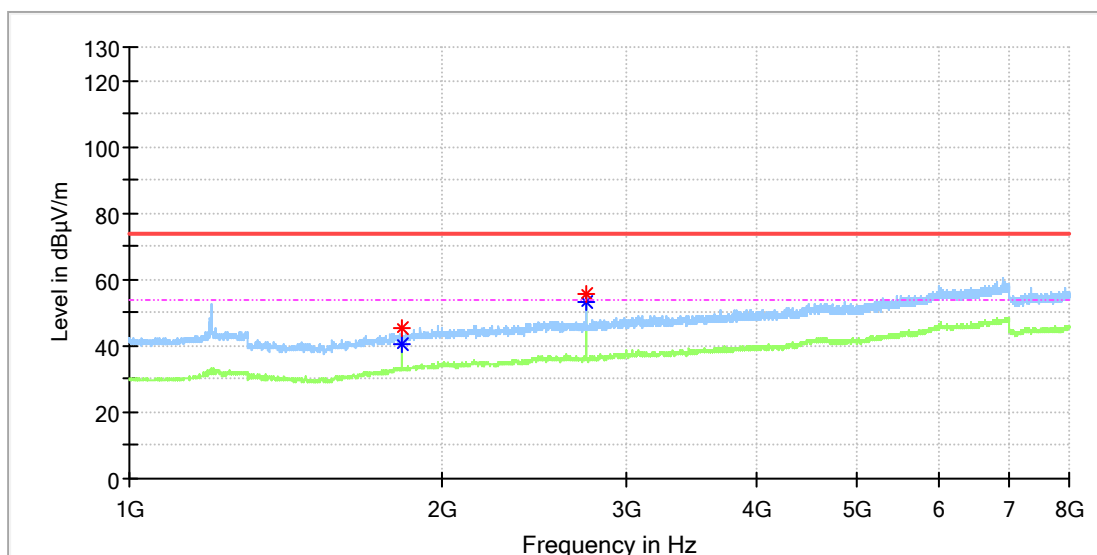


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1829.300000	45.46	---	74.00	28.54	100.0	H	225.0	4.9
1829.300000	---	40.44	54.00	13.56	100.0	H	225.0	4.9
2744.687500	55.89	---	74.00	18.11	100.0	H	234.0	7.8
2744.687500	---	52.31	54.00	1.69	100.0	H	234.0	7.8

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_914.9MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

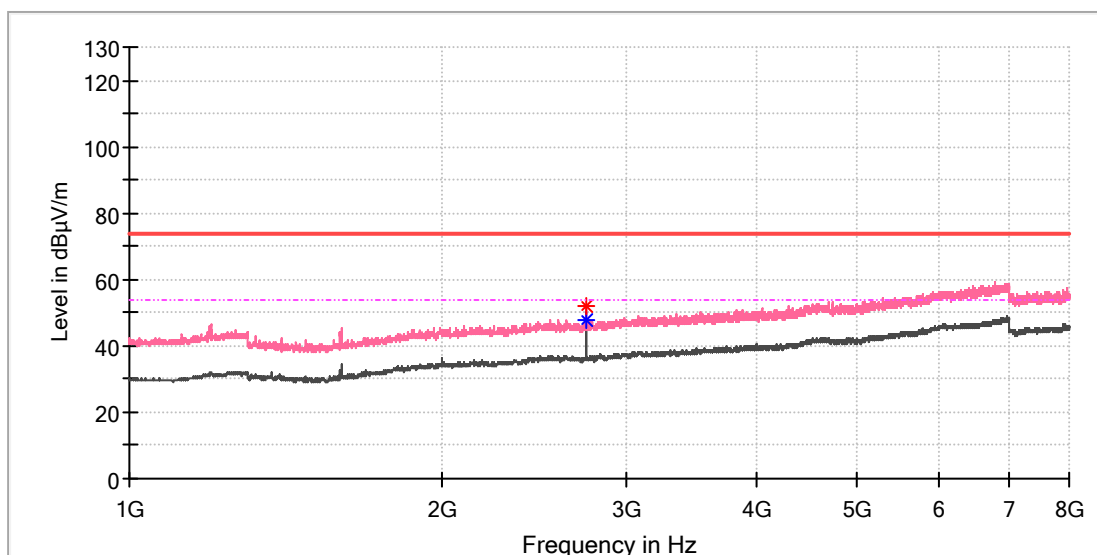


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2744.687500	51.72	---	74.00	22.28	100.0	V	221.0	7.8
2744.687500	---	47.97	54.00	6.03	100.0	V	221.0	7.8

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_902.3MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

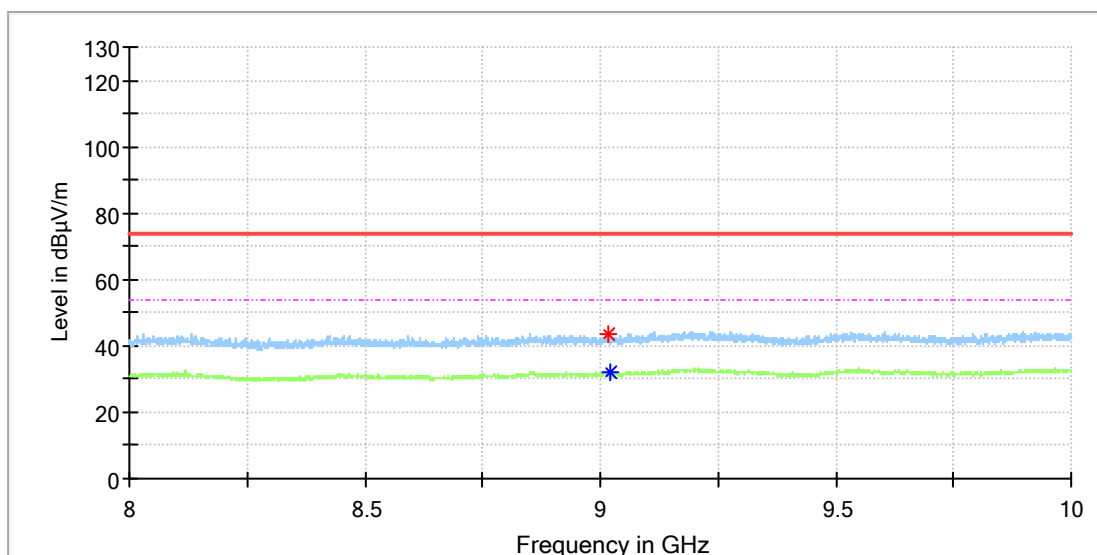


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
9018.000000	43.44	---	74.00	30.56	100.0	H	339.0	8.8
9023.000000	---	31.85	54.00	22.15	100.0	H	141.0	8.9

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_902.3MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

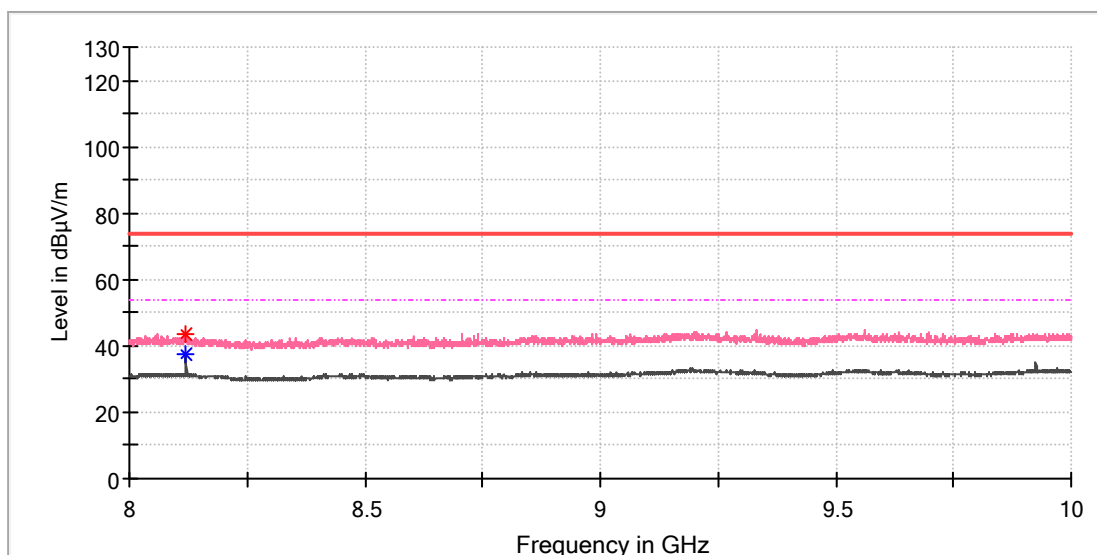


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8120.500000	43.33	---	74.00	30.67	100.0	V	57.0	8.6
8120.500000	---	37.38	54.00	16.62	100.0	V	57.0	8.6

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_908.5MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

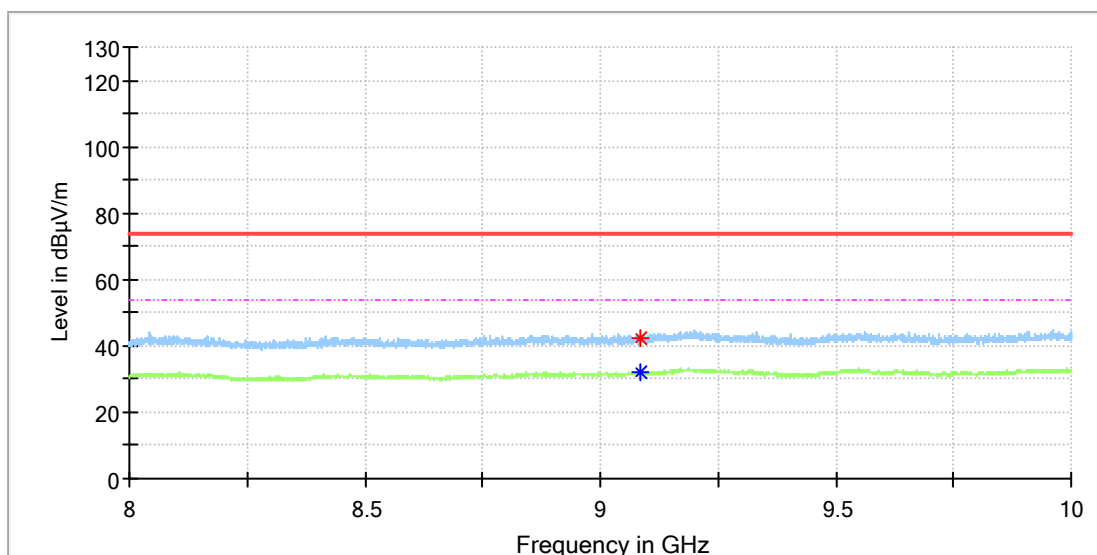


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
9085.000000	42.49	---	74.00	31.51	100.0	H	42.0	9.5
9087.000000	---	31.96	54.00	22.04	100.0	H	21.0	9.5

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_908.5MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

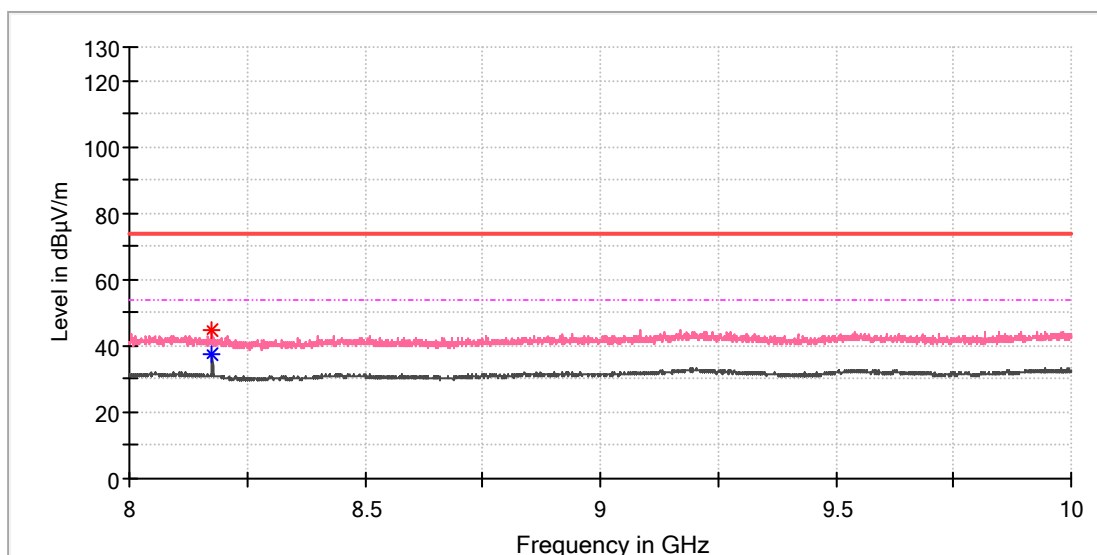


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8176.000000	44.47	---	74.00	29.53	100.0	V	34.0	8.5
8176.500000	---	37.57	54.00	16.43	100.0	V	73.0	8.5



### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_914.9MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

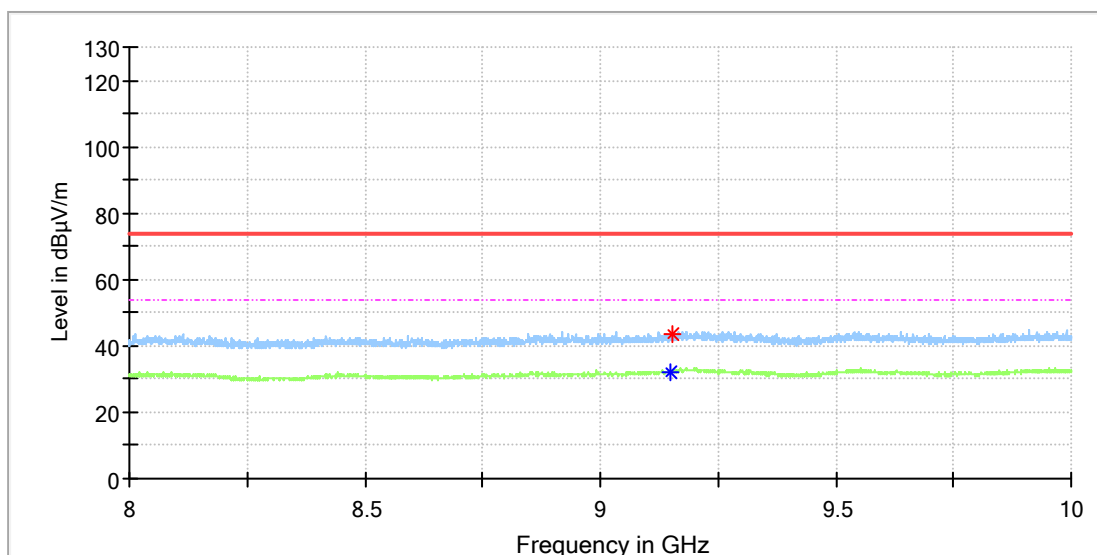


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
9148.500000	---	32.30	54.00	21.70	100.0	H	201.0	10.1
9152.000000	43.35	---	74.00	30.65	100.0	H	136.0	10.1

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_914.9MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

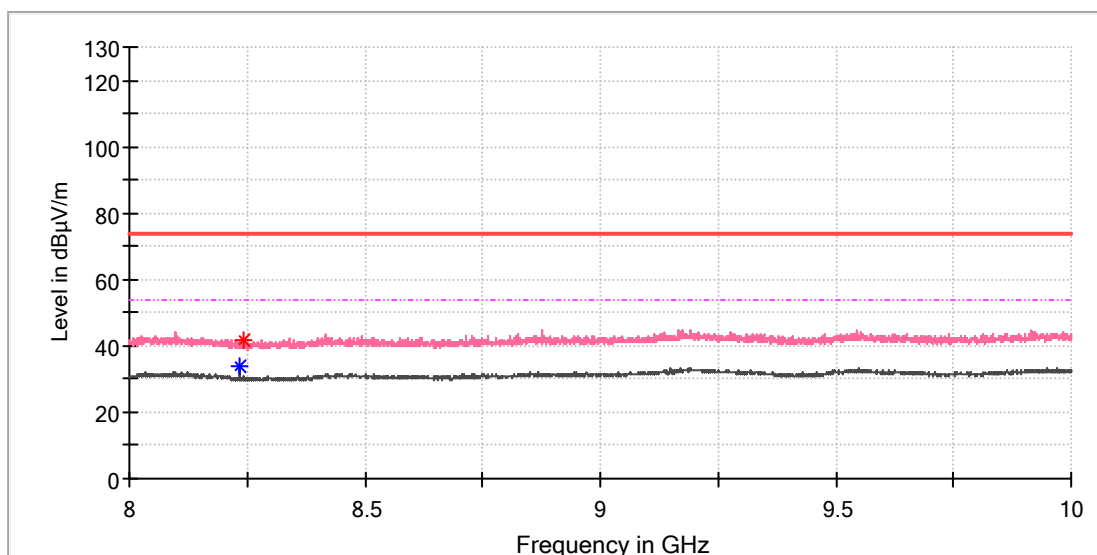


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8234.000000	---	34.08	54.00	19.92	100.0	V	24.0	8.4
8242.000000	41.56	---	74.00	32.44	100.0	V	204.0	8.4

Lora DTS, Antenna Gain: 0.8dBi

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_903MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

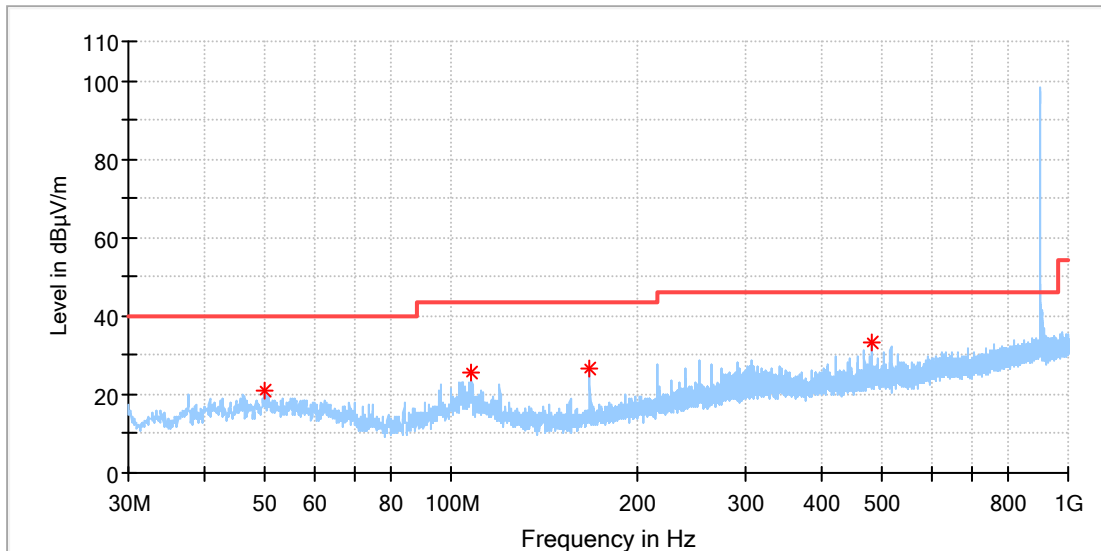


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.030500	21.22	40.00	18.78	100.0	H	223.0	-18.3
107.891000	25.65	43.50	17.85	100.0	H	171.0	-18.9
168.031000	26.81	43.50	16.69	100.0	H	272.0	-21.3
480.031500	33.31	46.00	12.69	100.0	H	42.0	-12.2

## EUT Information

EUT Name: WisDuo LPWAN Module  
 Model: RAK11300  
 Test Mode: Lora\_DTS 500K\_SF8\_903MHz  
 Order No/Sample No: 168358590/A003207710-003  
 Test Voltage:: DC 5V From USB  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

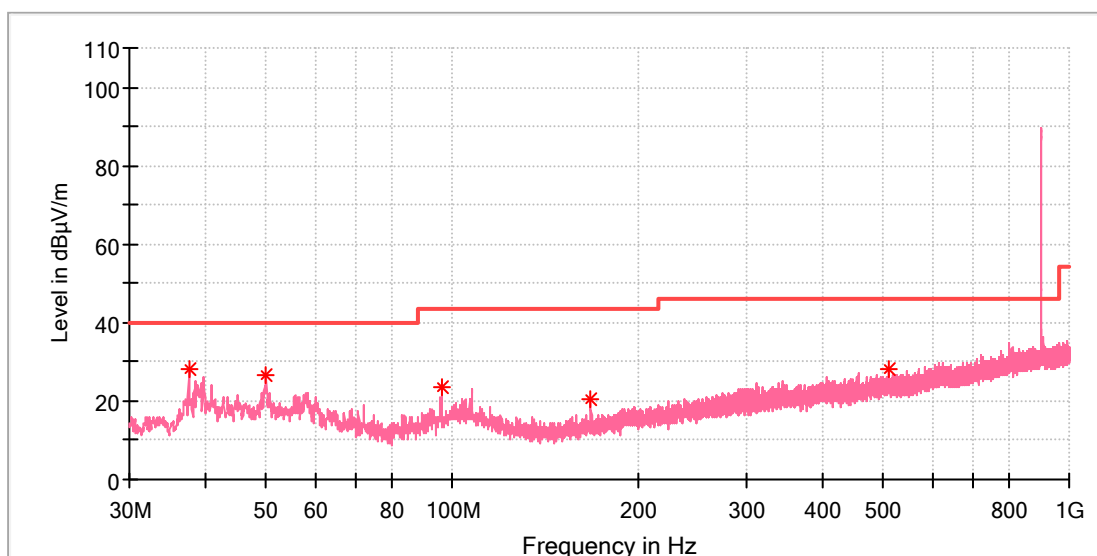


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.469000	28.19	40.00	11.81	100.0	V	335.0	-21.0
49.982000	26.52	40.00	13.48	100.0	V	356.0	-18.3
96.057000	23.51	43.50	19.99	100.0	V	215.0	-19.6
167.982500	20.29	43.50	23.21	100.0	V	335.0	-21.3
510.732000	28.07	46.00	17.93	100.0	V	86.0	-11.6

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_907.8MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

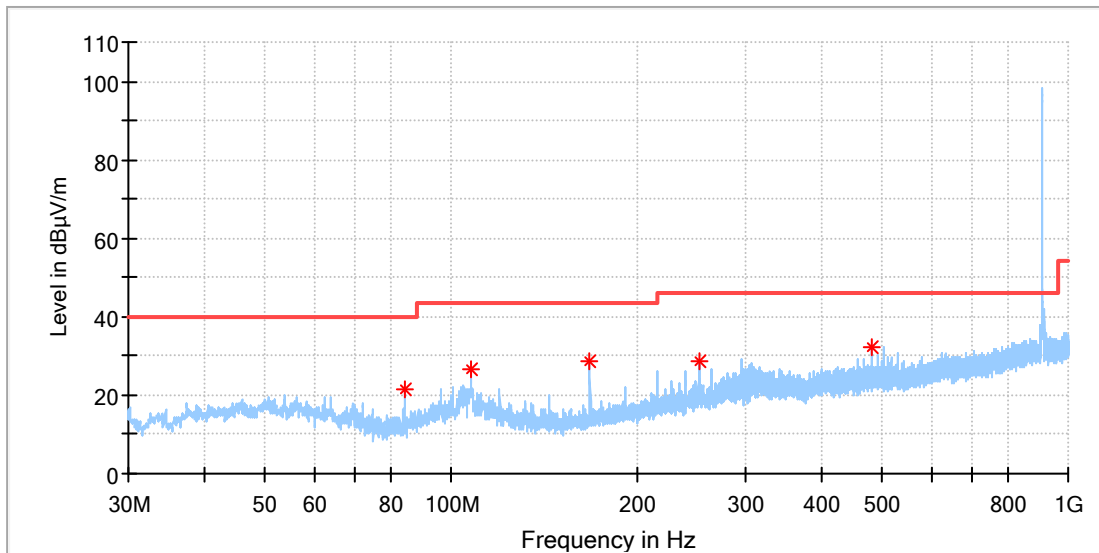


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
83.980500	21.56	40.00	18.44	100.0	H	143.0	-22.6
107.988000	26.44	43.50	17.06	100.0	H	271.0	-18.9
168.031000	28.59	43.50	14.91	100.0	H	271.0	-21.3
251.936000	28.61	46.00	17.39	100.0	H	206.0	-17.3
480.031500	32.38	46.00	13.62	100.0	H	206.0	-12.2

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_907.8MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

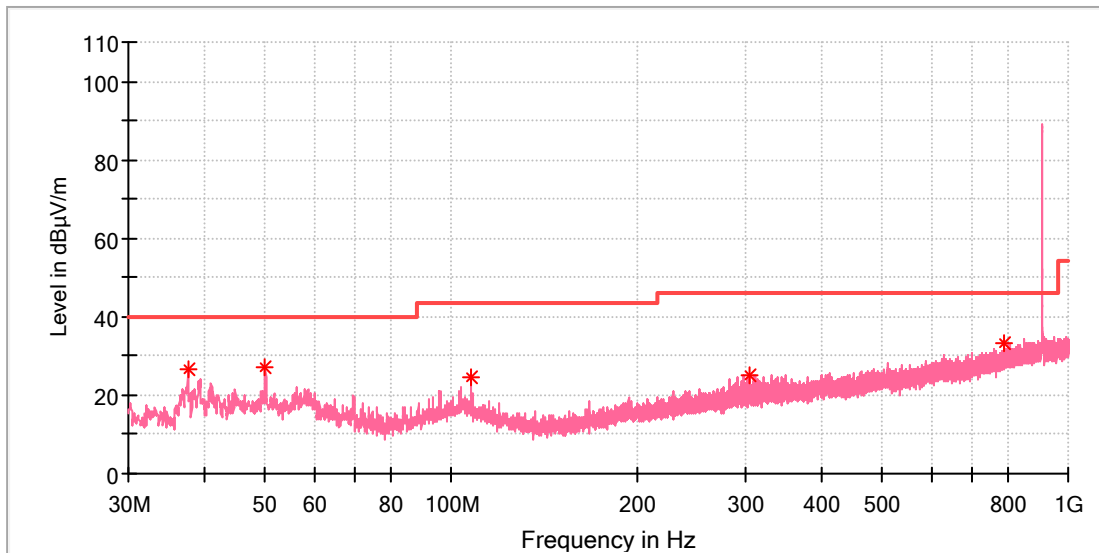


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.469000	26.75	40.00	13.25	100.0	V	171.0	-21.0
50.030500	27.00	40.00	13.00	100.0	V	278.0	-18.3
107.842500	24.78	43.50	18.72	100.0	V	244.0	-18.9
305.625500	25.20	46.00	20.80	100.0	V	264.0	-16.1
785.678500	33.12	46.00	12.88	100.0	V	244.0	-6.6

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_914.2MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

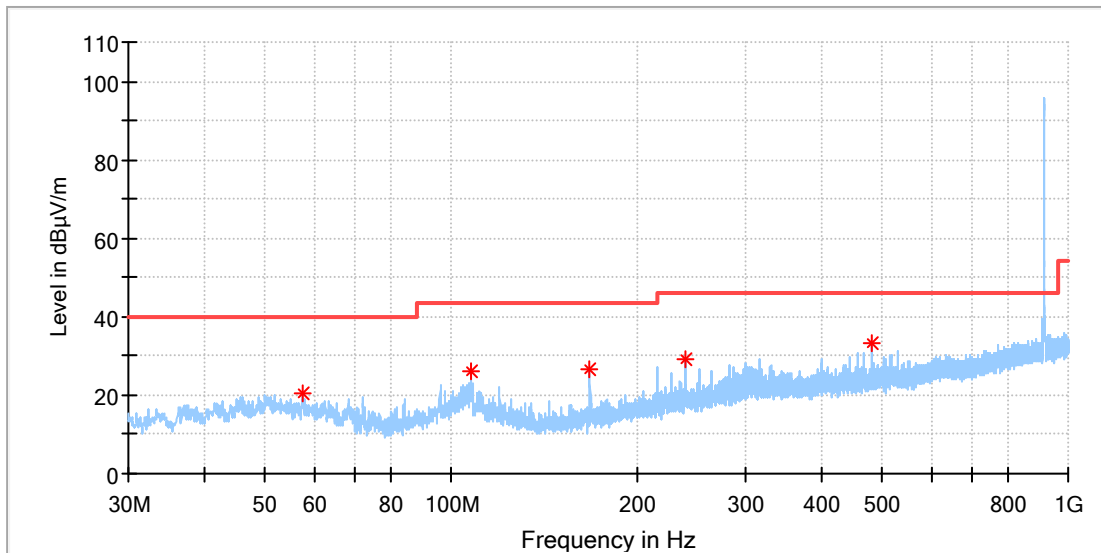


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
57.354000	20.41	40.00	19.59	100.0	H	337.0	-18.7
107.988000	26.19	43.50	17.31	100.0	H	130.0	-18.9
167.982500	26.66	43.50	16.84	100.0	H	302.0	-21.3
239.956500	28.95	46.00	17.05	100.0	H	191.0	-17.7
480.031500	33.50	46.00	12.50	100.0	H	227.0	-12.2

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_914.2MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

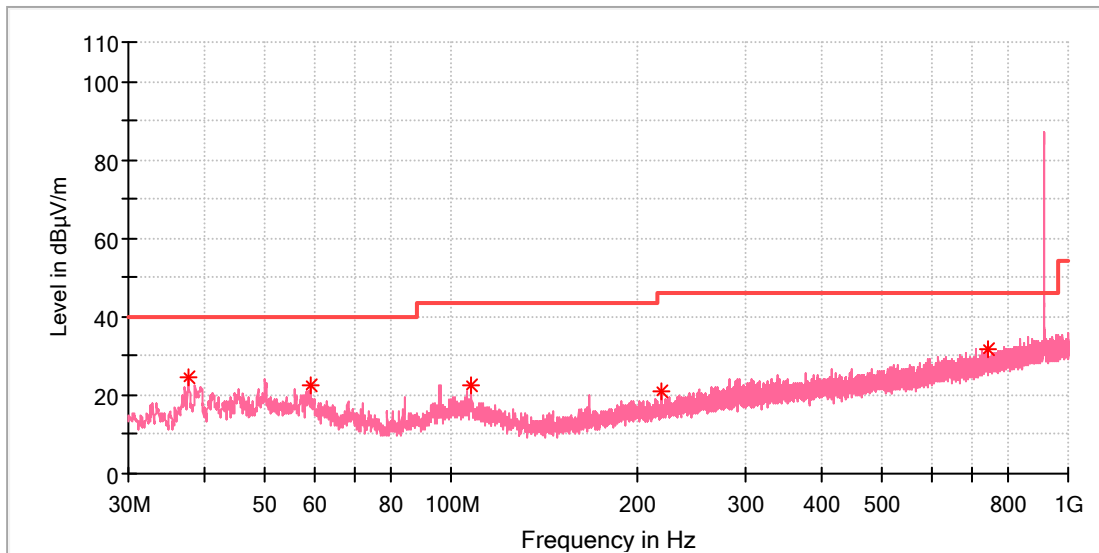


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.517500	24.73	40.00	15.27	100.0	V	114.0	-21.0
59.342500	22.71	40.00	17.29	100.0	V	121.0	-18.9
107.988000	22.62	43.50	20.88	100.0	V	201.0	-18.9
219.004500	21.04	46.00	24.96	100.0	V	265.0	-18.6
742.853000	31.97	46.00	14.03	100.0	V	249.0	-7.3



### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_903MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

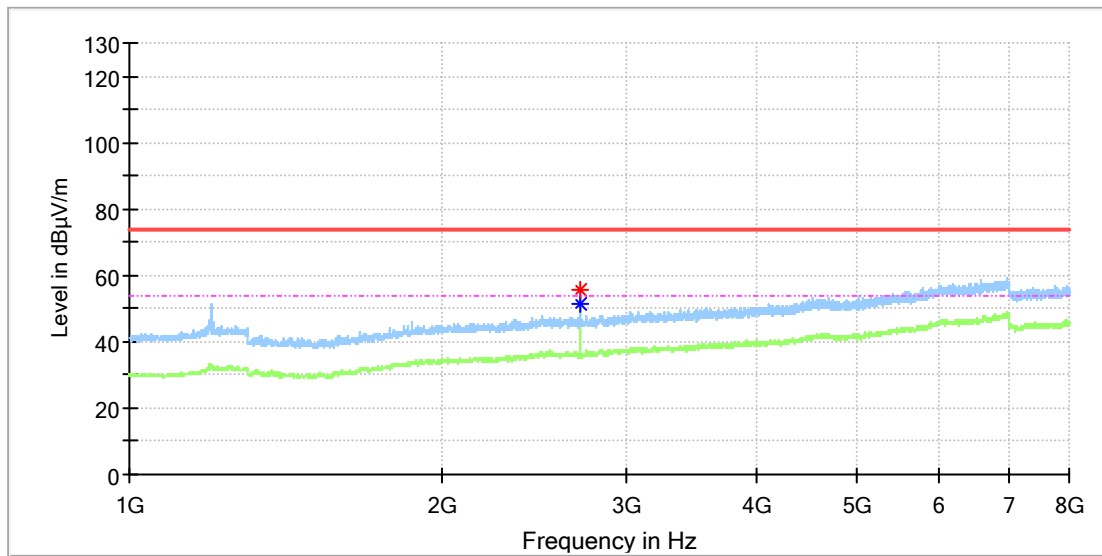


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2707.837500	---	51.65	54.00	2.35	100.0	H	203.0	7.6
2708.675000	55.60	---	74.00	18.40	100.0	H	280.0	7.6

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_903MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

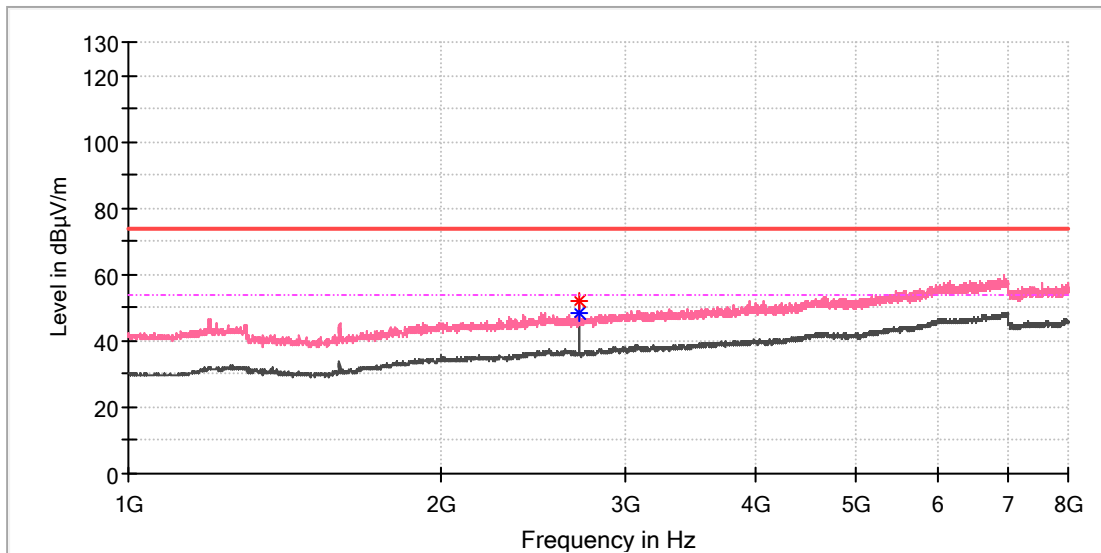


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2708.675000	51.96	---	74.00	22.04	100.0	V	267.0	7.6
2708.675000	---	48.26	54.00	5.74	100.0	V	267.0	7.6

### EUT Information

EUT Name: WisDuo LPWAN Module  
 Model: RAK11300  
 Test Mode: Lora\_DTS 500K\_SF8\_907.8MHz  
 Order No/Sample No: 168358590/A003207710-003  
 Test Voltage:: DC 5V From USB  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

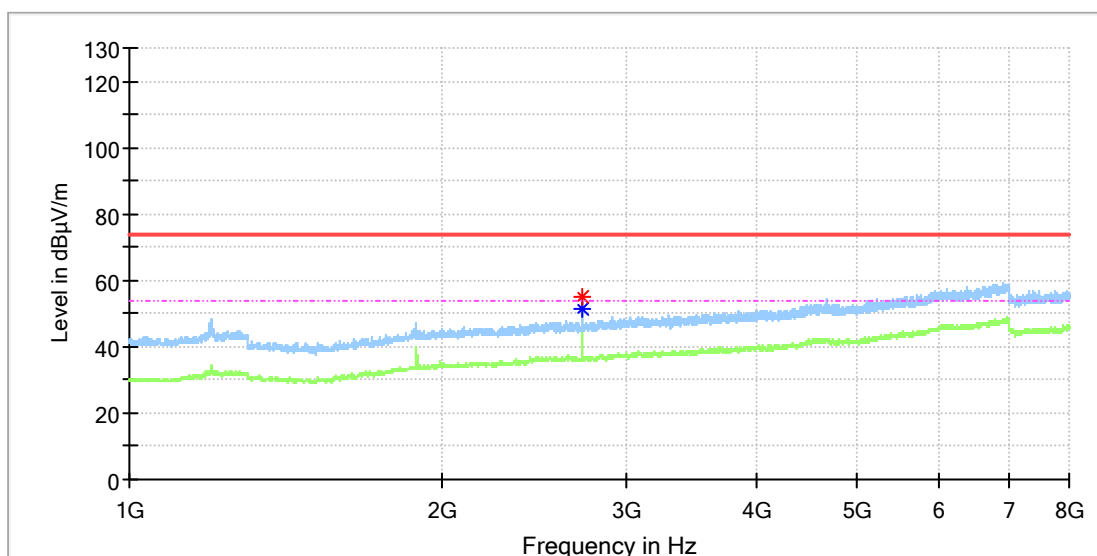


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2722.912500	---	51.31	54.00	2.69	100.0	H	284.0	7.7
2723.750000	55.13	---	74.00	18.87	100.0	H	284.0	7.7

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_907.8MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

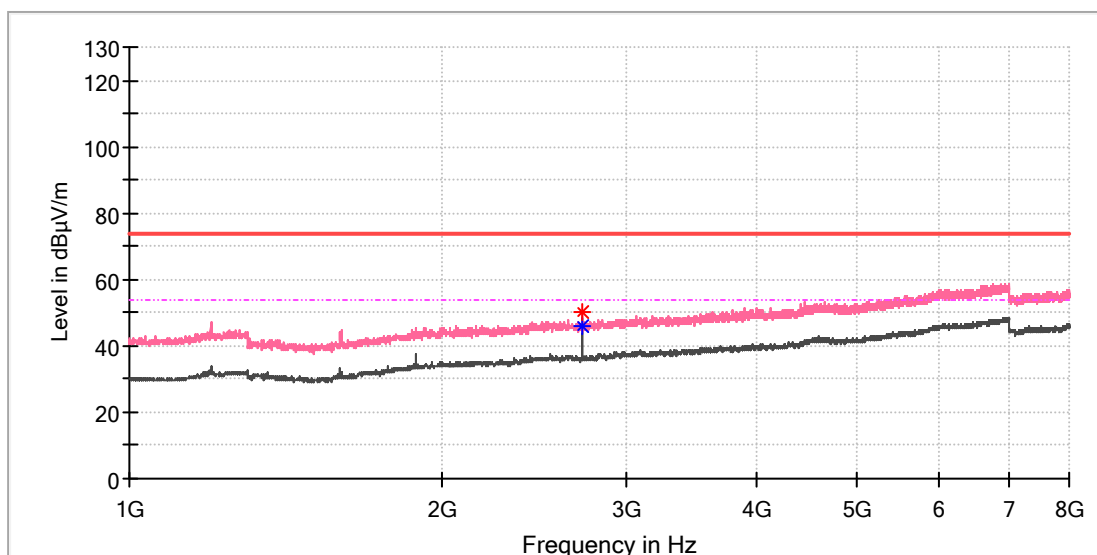


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2722.912500	---	46.03	54.00	7.97	100.0	V	260.0	7.7
2723.750000	49.94	---	74.00	24.06	100.0	V	304.0	7.7

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_914.2MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

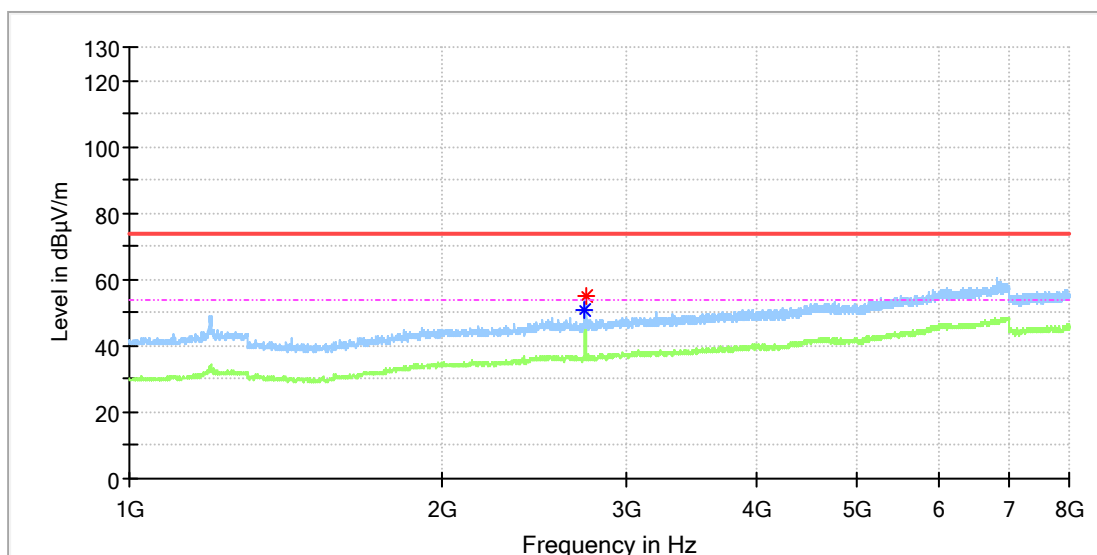


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2741.337500	---	50.78	54.00	3.22	100.0	H	271.0	7.8
2743.012500	54.96	---	74.00	19.04	100.0	H	281.0	7.8

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_914.2MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

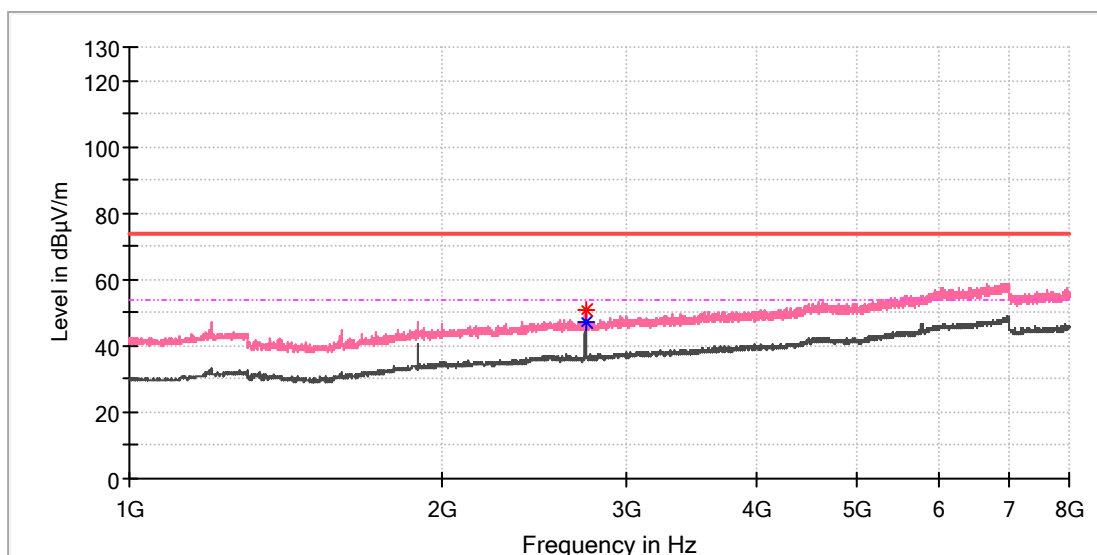


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2743.012500	---	47.04	54.00	6.96	100.0	V	266.0	7.8
2743.012500	50.58	---	74.00	23.42	100.0	V	266.0	7.8

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_903MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

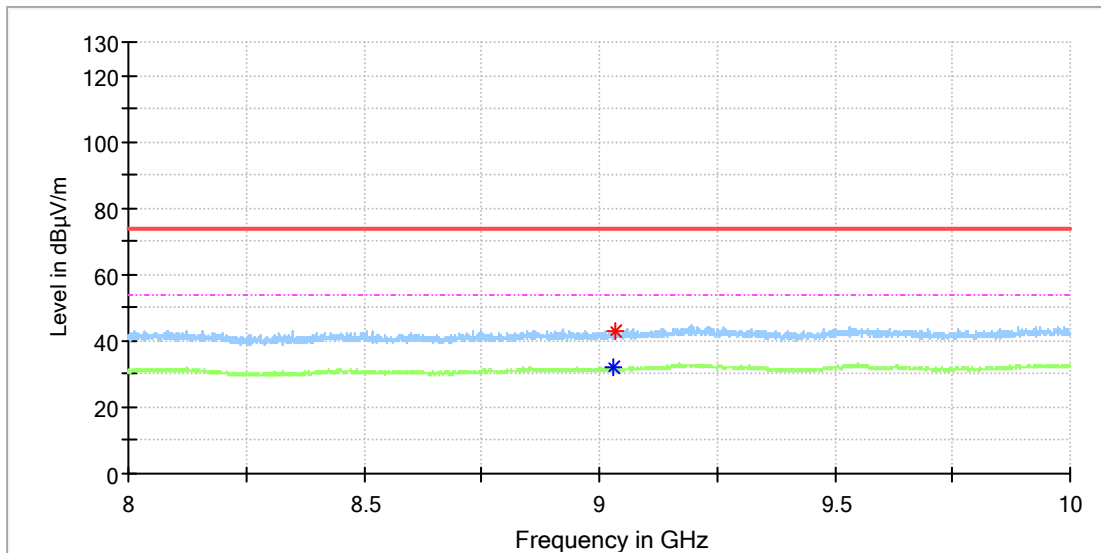


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
9030.000000	---	31.83	54.00	22.17	100.0	H	94.0	8.9
9035.000000	42.77	---	74.00	31.23	100.0	H	43.0	8.9

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_903MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

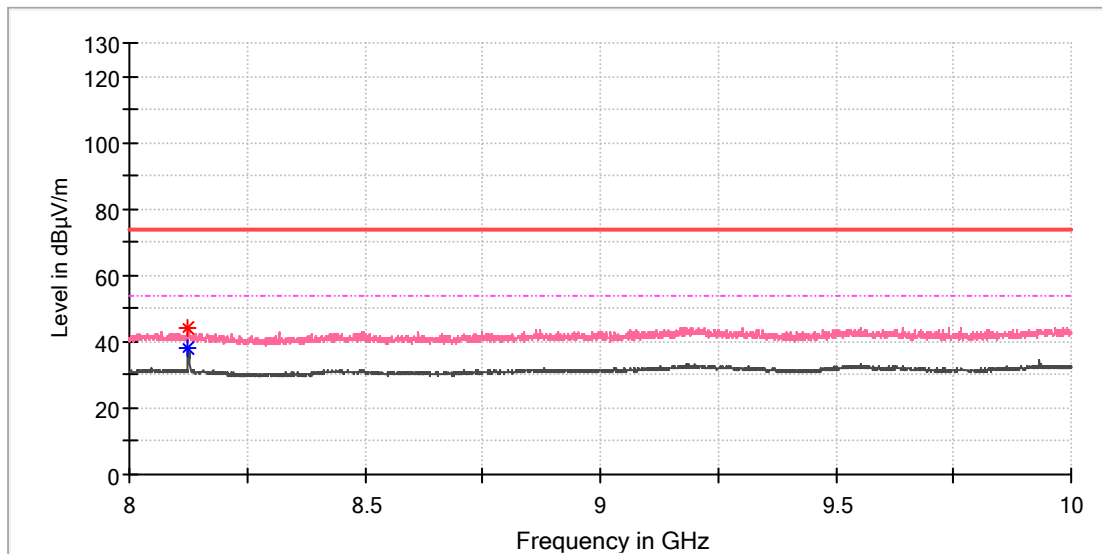


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8125.000000	43.89	---	74.00	30.11	100.0	V	54.0	8.6
8125.500000	---	38.29	54.00	15.71	100.0	V	64.0	8.6



### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_907.8MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

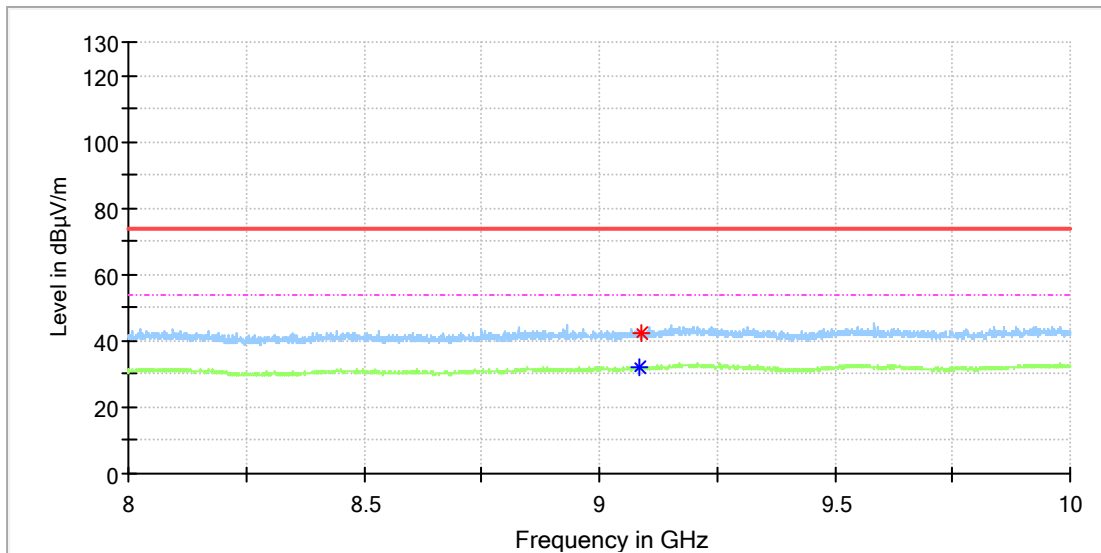


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
9086.000000	---	31.93	54.00	22.07	100.0	H	359.0	9.5
9088.500000	42.51	---	74.00	31.49	100.0	H	336.0	9.6

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_907.8MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

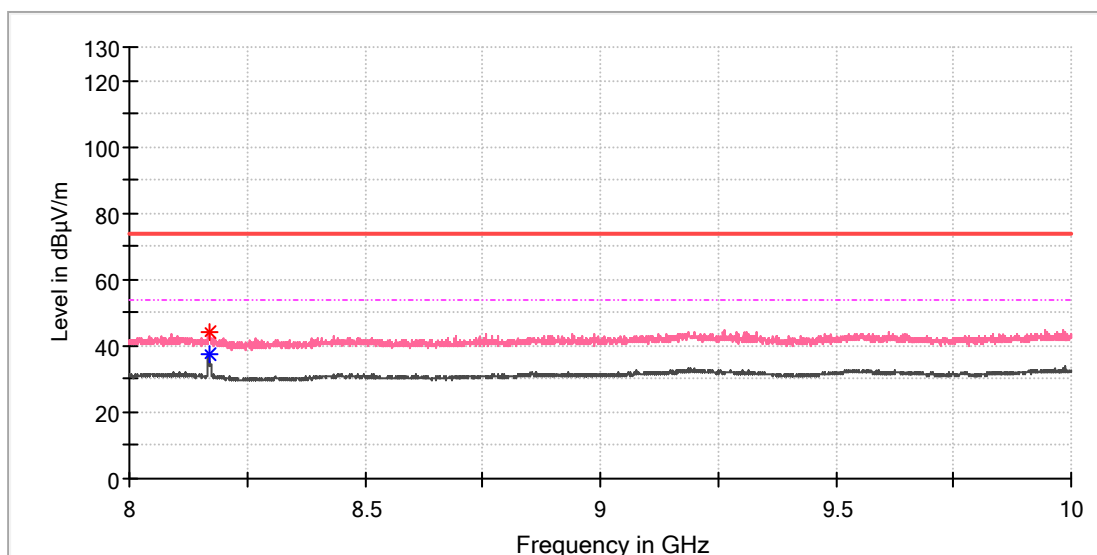


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8168.500000	44.10	---	74.00	29.90	100.0	V	56.0	8.5
8169.000000	---	37.59	54.00	16.41	100.0	V	56.0	8.5

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_914.2MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

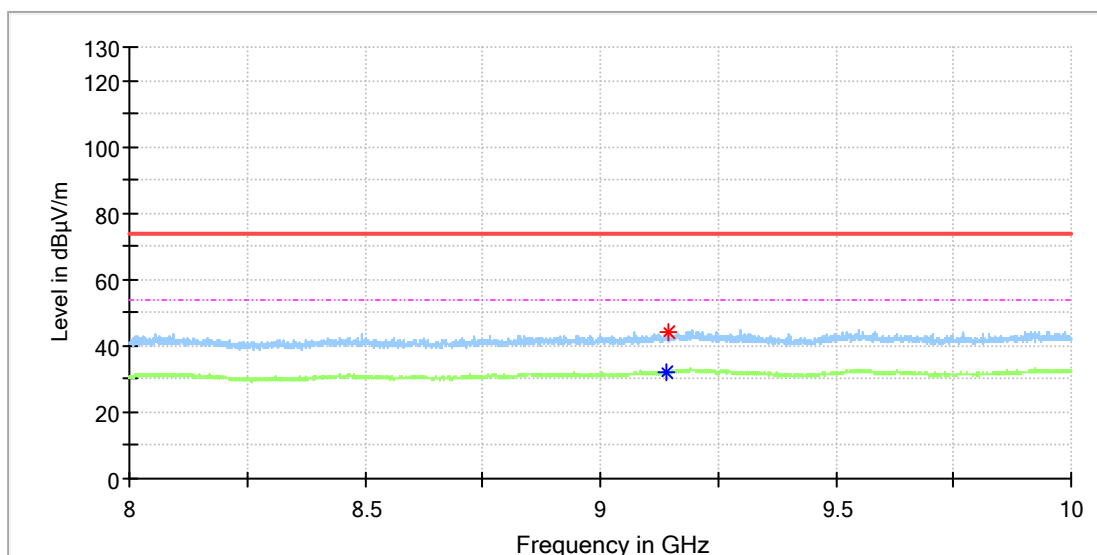


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
9141.000000	---	32.34	54.00	21.66	100.0	H	139.0	10.0
9144.000000	43.88	---	74.00	30.12	100.0	H	149.0	10.1

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_914.2MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

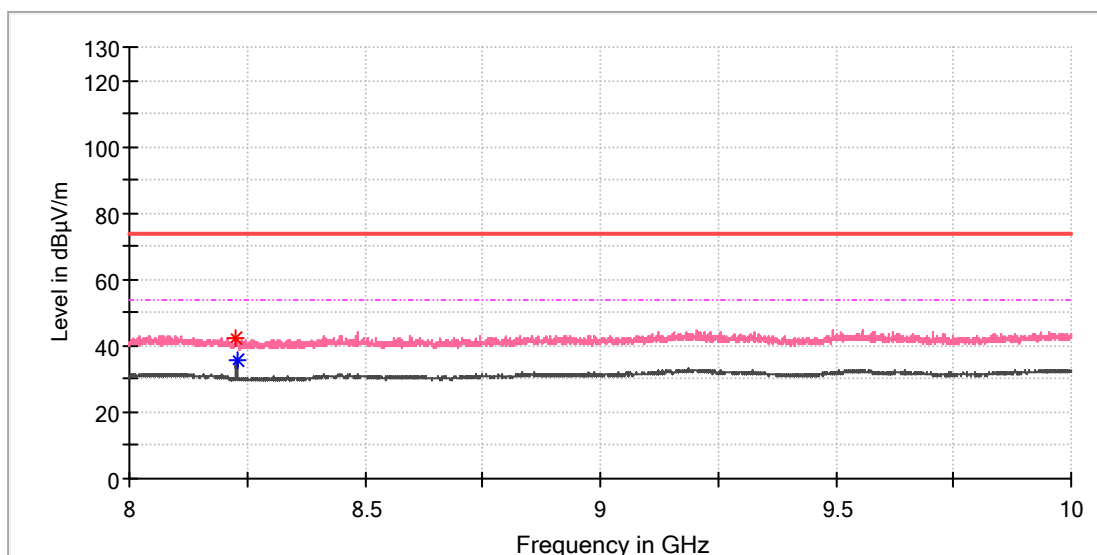


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8227.500000	42.11	---	74.00	31.89	100.0	V	245.0	8.4
8228.500000	---	35.66	54.00	18.34	100.0	V	65.0	8.4

Lora FHSS SF7, Antenna Gain: 2.3dBi

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_902.3MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

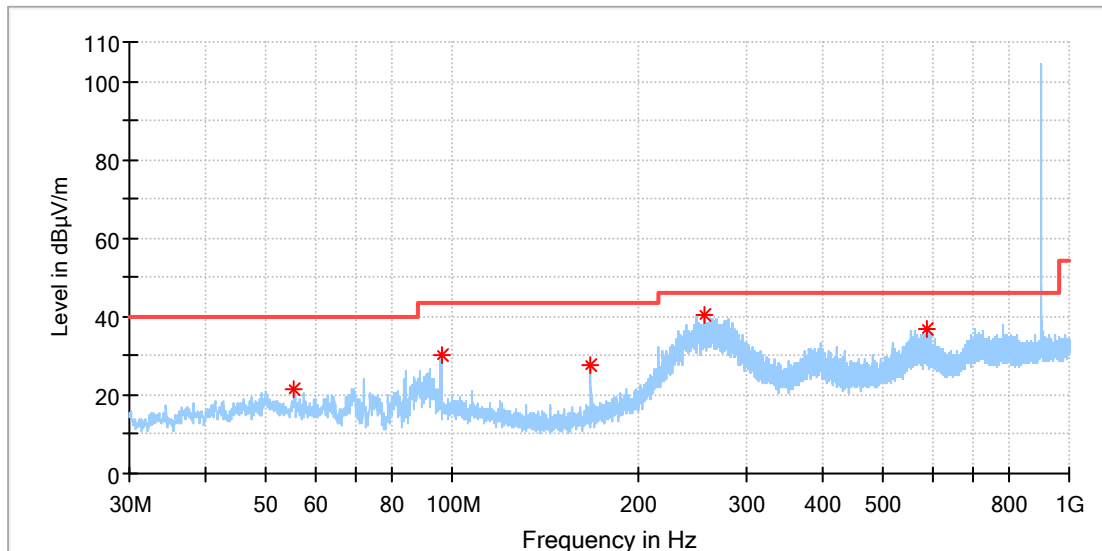


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
55.559500	21.32	40.00	18.68	100.0	H	314.0	-18.5
95.960000	29.94	43.50	13.56	100.0	H	167.0	-19.6
168.031000	27.51	43.50	15.99	100.0	H	19.0	-21.3
256.689000	40.28	46.00	5.72	100.0	H	198.0	-17.1
586.246500	36.63	46.00	9.37	100.0	H	224.0	-10.1

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_902.3MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

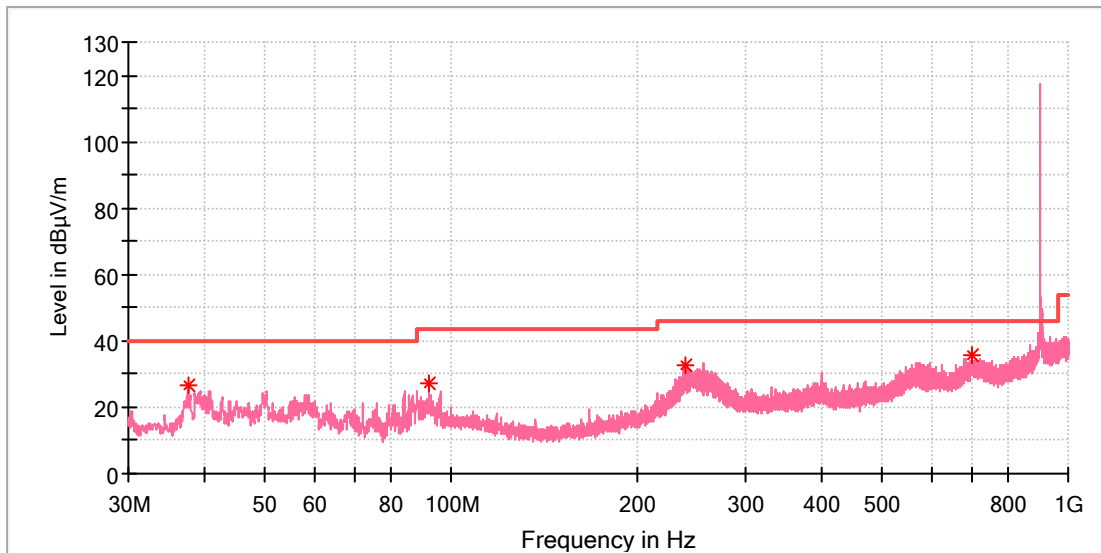


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.469000	26.37	40.00	13.63	100.0	V	70.0	-21.0
92.177000	27.05	43.50	16.45	100.0	V	255.0	-20.5
239.908000	32.57	46.00	13.43	100.0	V	288.0	-17.7
697.845000	35.97	46.00	10.03	100.0	V	57.0	-8.1

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_908.5MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

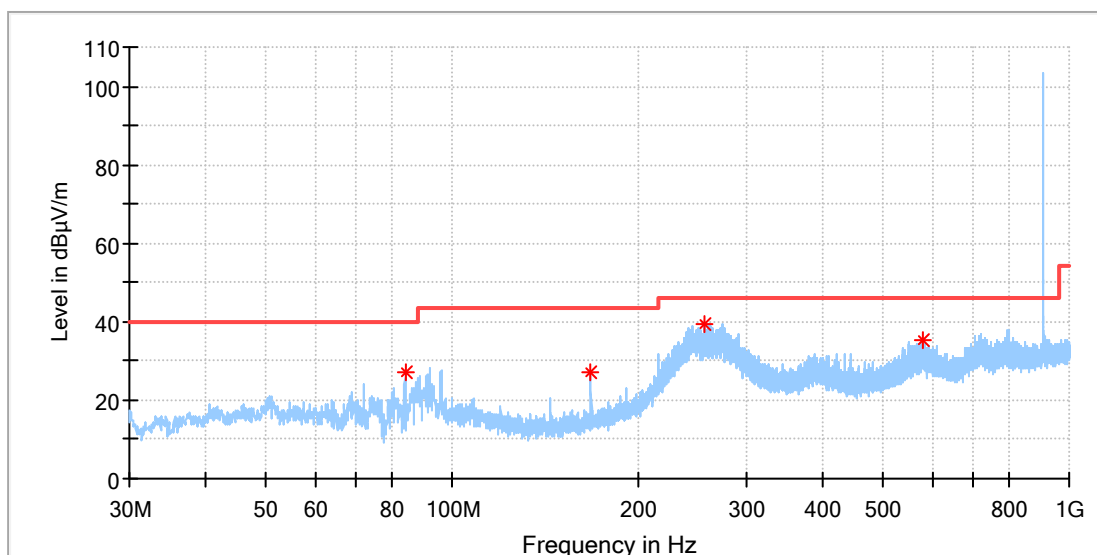


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
84.077500	27.19	40.00	12.81	100.0	H	320.0	-22.5
167.982500	27.13	43.50	16.37	100.0	H	278.0	-21.3
256.010000	39.61	46.00	6.39	100.0	H	188.0	-17.1
577.371000	35.53	46.00	10.47	100.0	H	224.0	-10.3

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_908.5MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

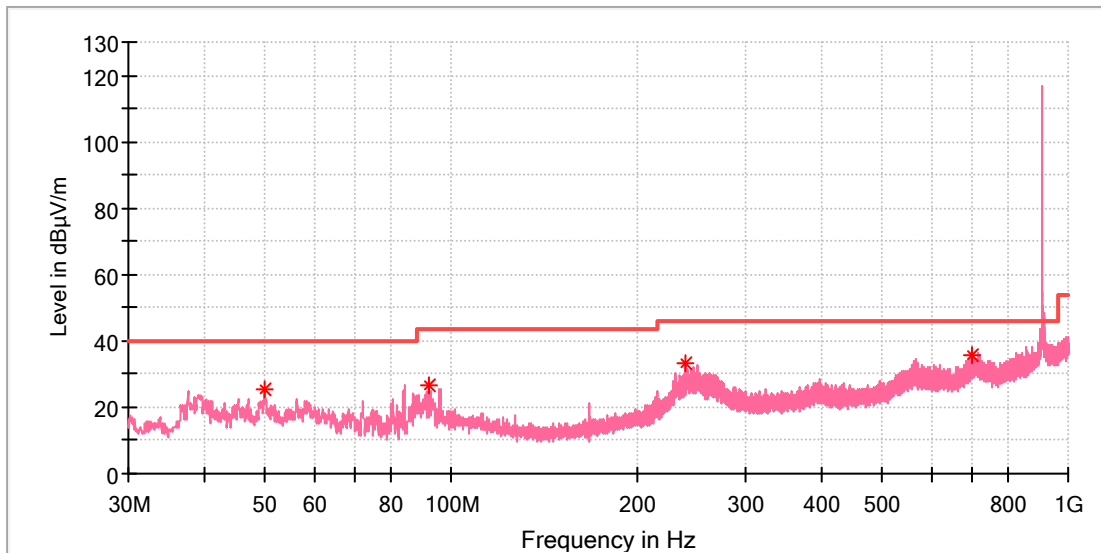


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.788000	25.13	40.00	14.87	100.0	V	252.0	-18.3
92.177000	26.76	43.50	16.74	100.0	V	246.0	-20.5
239.374500	32.99	46.00	13.01	100.0	V	264.0	-17.7
698.087500	35.60	46.00	10.40	100.0	V	60.0	-8.0



## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_914.9MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

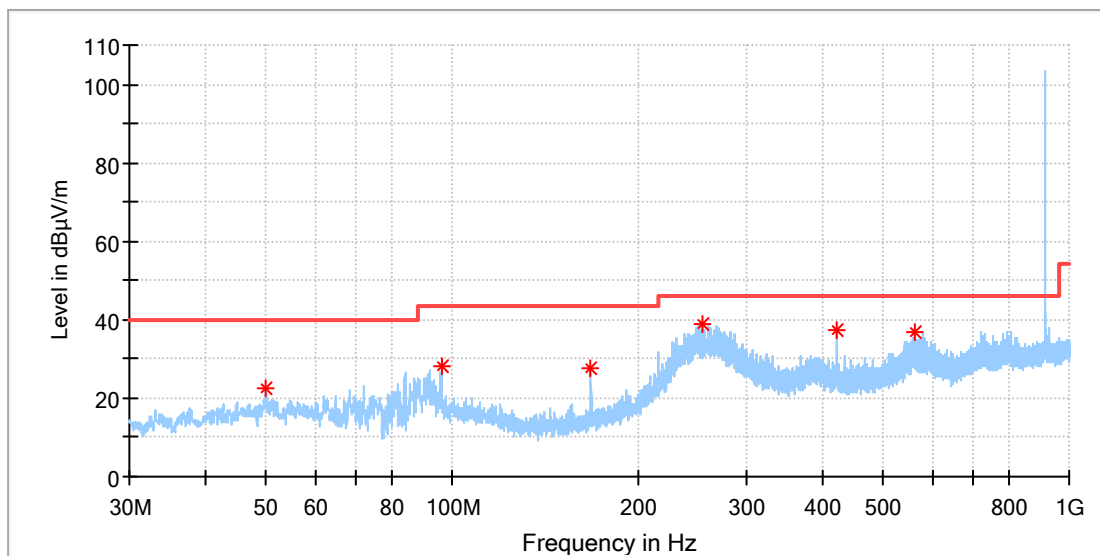


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.982000	22.37	40.00	17.63	100.0	H	70.0	-18.3
96.057000	28.24	43.50	15.26	100.0	H	319.0	-19.6
168.031000	27.85	43.50	15.65	100.0	H	287.0	-21.3
253.876000	38.90	46.00	7.10	100.0	H	192.0	-17.2
419.988500	37.33	46.00	8.67	100.0	H	112.0	-13.4
561.463000	36.58	46.00	9.42	100.0	H	228.0	-10.7

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_914.9MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

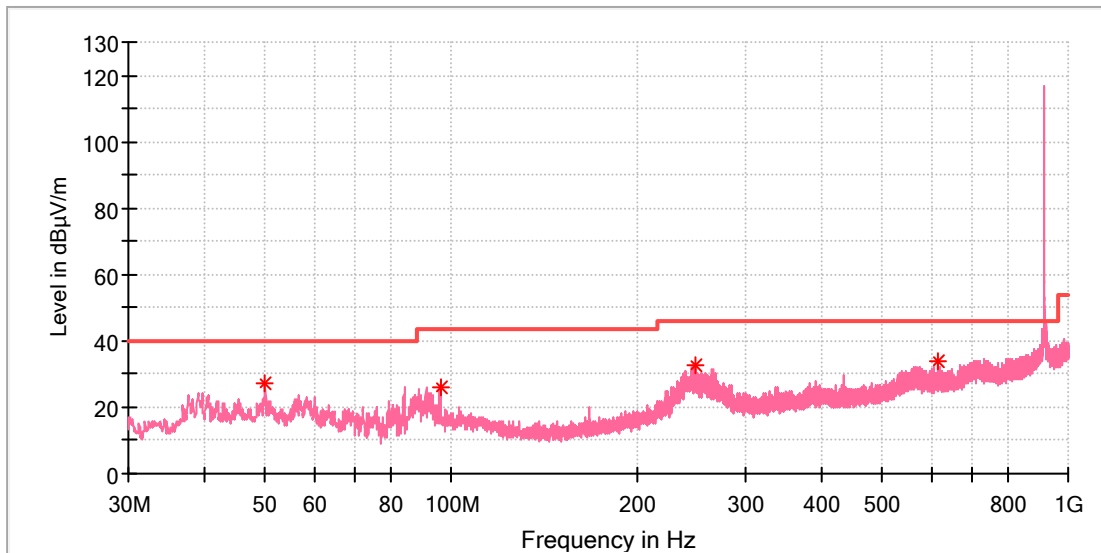


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.982000	27.12	40.00	12.88	100.0	V	176.0	-18.3
95.960000	25.86	43.50	17.64	100.0	V	222.0	-19.6
248.832000	32.84	46.00	13.16	100.0	V	269.0	-17.4
614.813000	33.61	46.00	12.39	100.0	V	0.0	-9.6

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_902.3MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

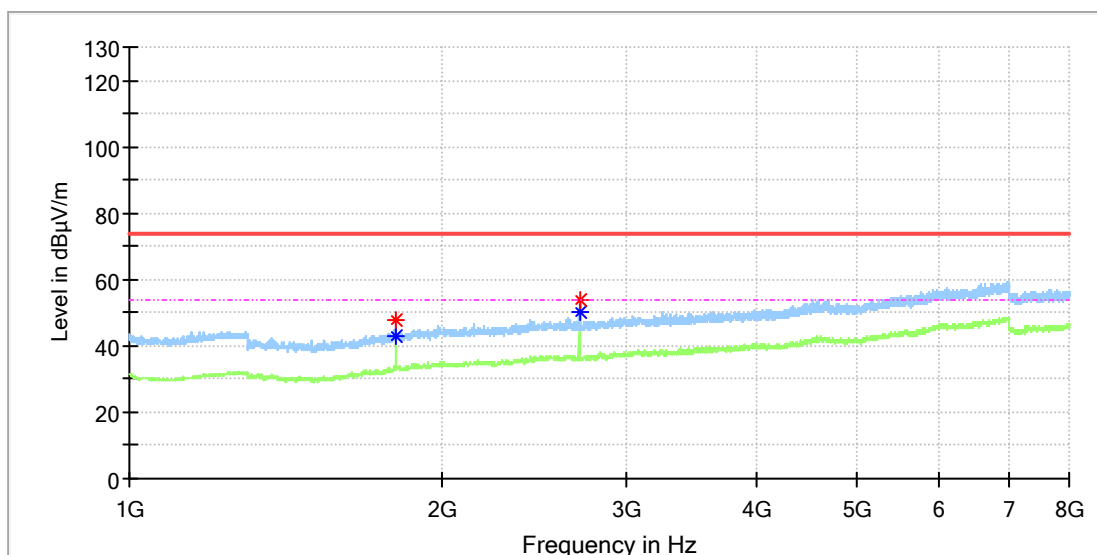


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1804.175000	47.47	---	74.00	26.53	100.0	H	144.0	4.7
1804.175000	---	42.76	54.00	11.24	100.0	H	144.0	4.7
2707.000000	53.93	---	74.00	20.07	100.0	H	264.0	7.6
2707.000000	---	50.34	54.00	3.66	100.0	H	264.0	7.6

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS 125K_SF7_902.3MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

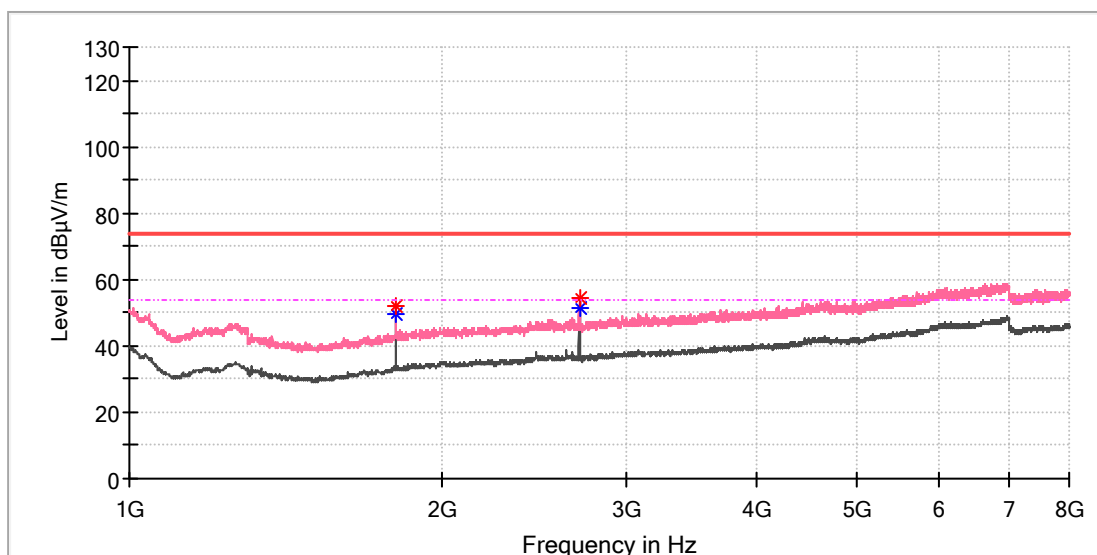


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1804.175000	52.05	---	74.00	21.95	100.0	V	96.0	4.7
1804.175000	---	49.79	54.00	4.21	100.0	V	96.0	4.7
2706.162500	---	50.97	54.00	3.03	100.0	V	285.0	7.5
2707.000000	54.23	---	74.00	19.77	100.0	V	254.0	7.6

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS125K_SF7_908.5MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

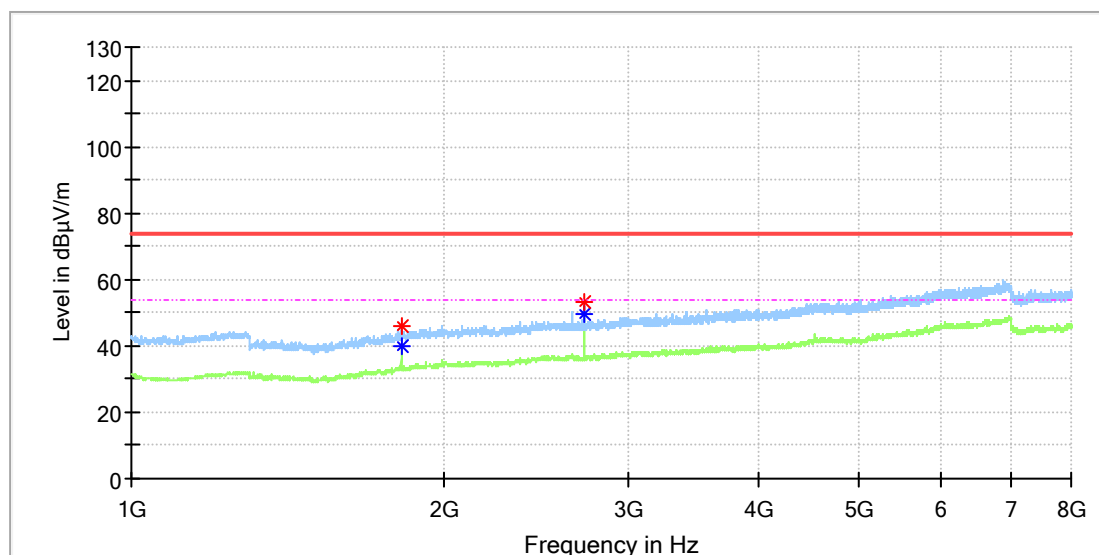


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1816.737500	45.74	---	74.00	28.26	100.0	H	265.0	4.8
1816.737500	---	39.83	54.00	14.17	100.0	H	265.0	4.8
2725.425000	53.11	---	74.00	20.89	100.0	H	265.0	7.7
2725.425000	---	49.84	54.00	4.16	100.0	H	265.0	7.7

### EUT Information

EUT Name: WisDuo LPWAN Module  
 Model: RAK11300  
 Test Mode: FHSS125K\_SF7\_908.5MHz  
 Order No/Sample No: 168358590/A003207710-003  
 Test Voltage:: DC 5V From USB  
 Remark: Temp 22 Humi:52%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

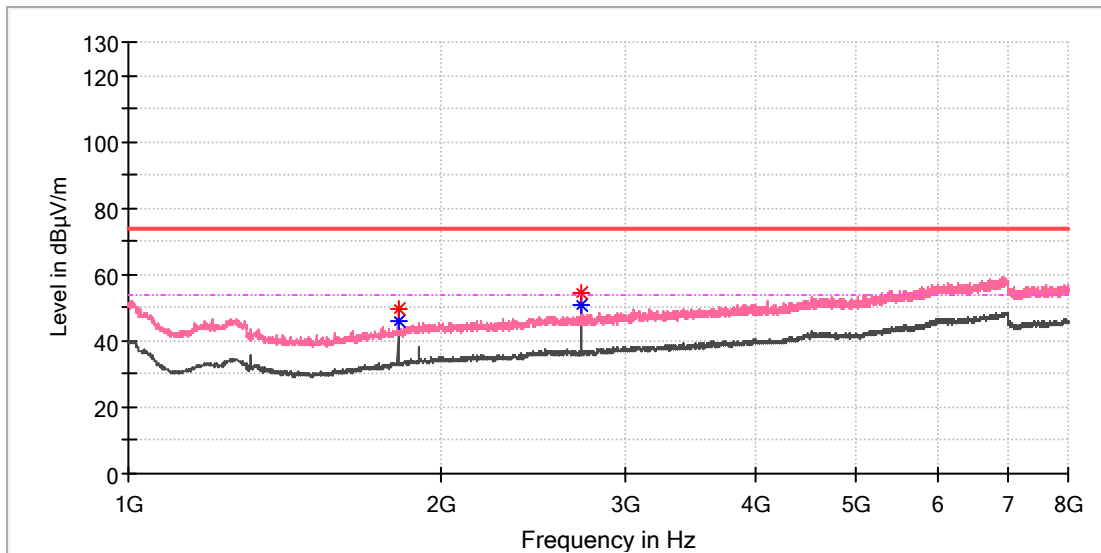


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1816.737500	---	45.87	54.00	8.13	100.0	V	117.0	4.8
1816.737500	49.36	---	74.00	24.64	100.0	V	117.0	4.8
2724.587500	54.25	---	74.00	19.75	100.0	V	287.0	7.7
2725.425000	---	50.96	54.00	3.04	100.0	V	287.0	7.7

### EUT Information

EUT Name: WisDuo LPWAN Module  
 Model: RAK11300  
 Test Mode: FHSS125K\_SF7\_914.9MHz  
 Order No/Sample No: 168358590/A003207710-003  
 Test Voltage:: DC 5V From USB  
 Remark: Temp 22 Humi:52%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

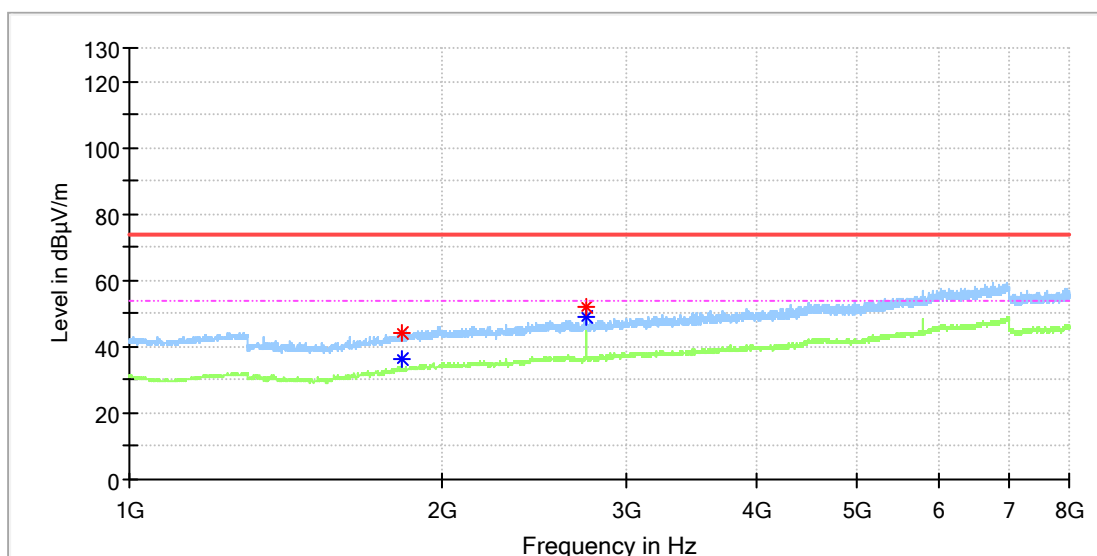


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1829.300000	---	36.18	54.00	17.82	100.0	H	131.0	4.9
1830.137500	44.07	---	74.00	29.93	100.0	H	139.0	4.9
2744.687500	52.09	---	74.00	21.91	100.0	H	148.0	7.8
2744.687500	---	49.08	54.00	4.92	100.0	H	148.0	7.8

### EUT Information

EUT Name: WisDuo LPWAN Module  
 Model: RAK11300  
 Test Mode: FHSS125K\_SF7\_914.9MHz  
 Order No/Sample No: 168358590/A003207710-003  
 Test Voltage:: DC 5V From USB  
 Remark: Temp 22 Humi:52%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

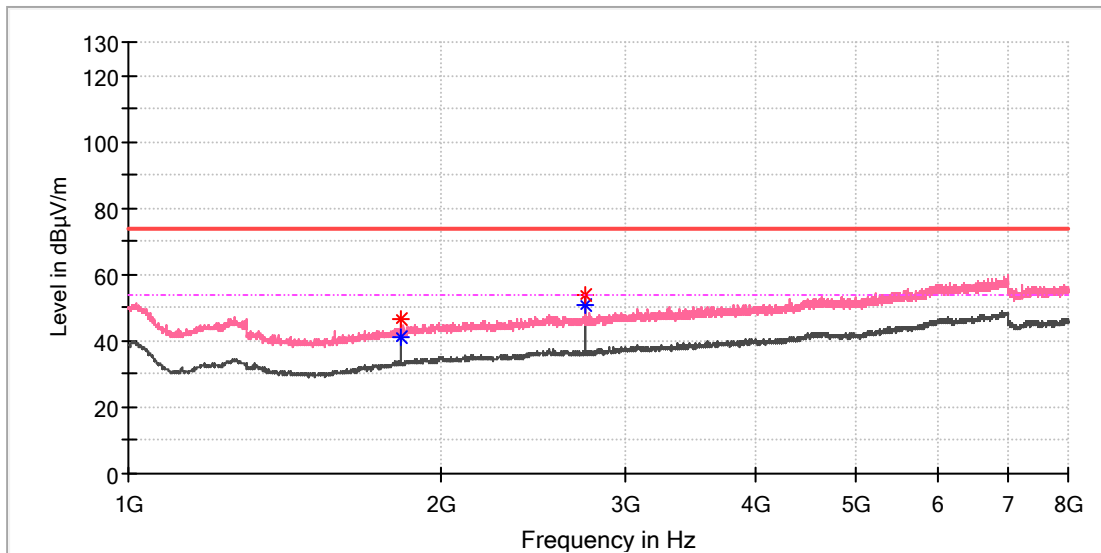


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1829.300000	---	41.20	54.00	12.80	100.0	V	254.0	4.9
1829.300000	46.36	---	74.00	27.64	100.0	V	254.0	4.9
2744.687500	53.59	---	74.00	20.41	100.0	V	281.0	7.8
2744.687500	---	50.54	54.00	3.46	100.0	V	281.0	7.8



## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS125K_SF7_902.3MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

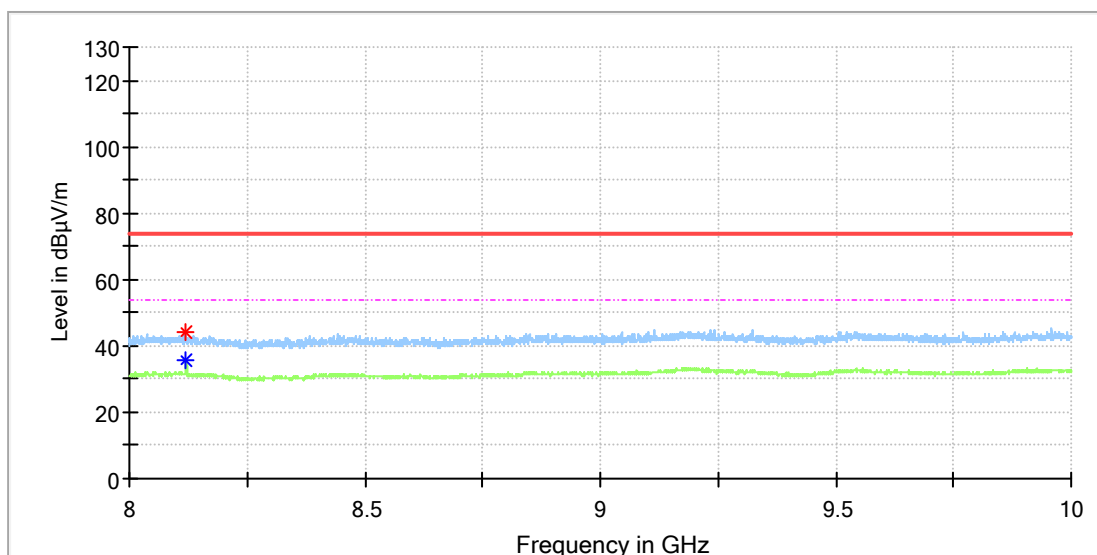


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8117.500000	44.18	---	74.00	29.82	100.0	H	2.0	8.6
8121.000000	---	35.86	54.00	18.14	100.0	H	184.0	8.6

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS125K_SF7_902.3MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

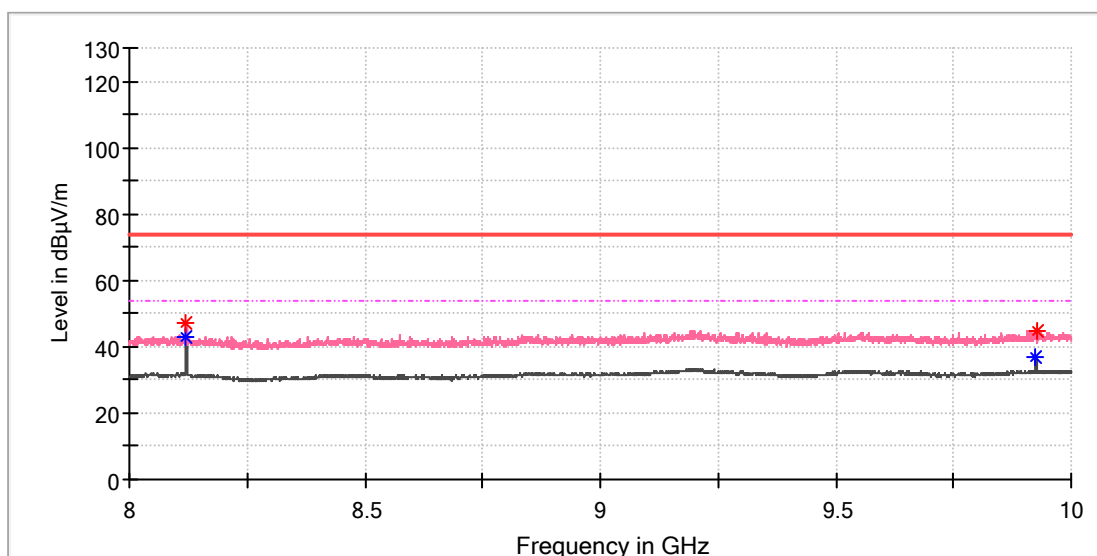


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8121.000000	47.43	---	74.00	26.57	100.0	V	337.0	8.6
8121.000000	---	42.94	54.00	11.06	100.0	V	337.0	8.6
9925.000000	---	37.14	54.00	16.86	100.0	V	161.0	10.4
9926.000000	44.45	---	74.00	29.55	100.0	V	337.0	10.4

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS125K_SF7_908.5MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

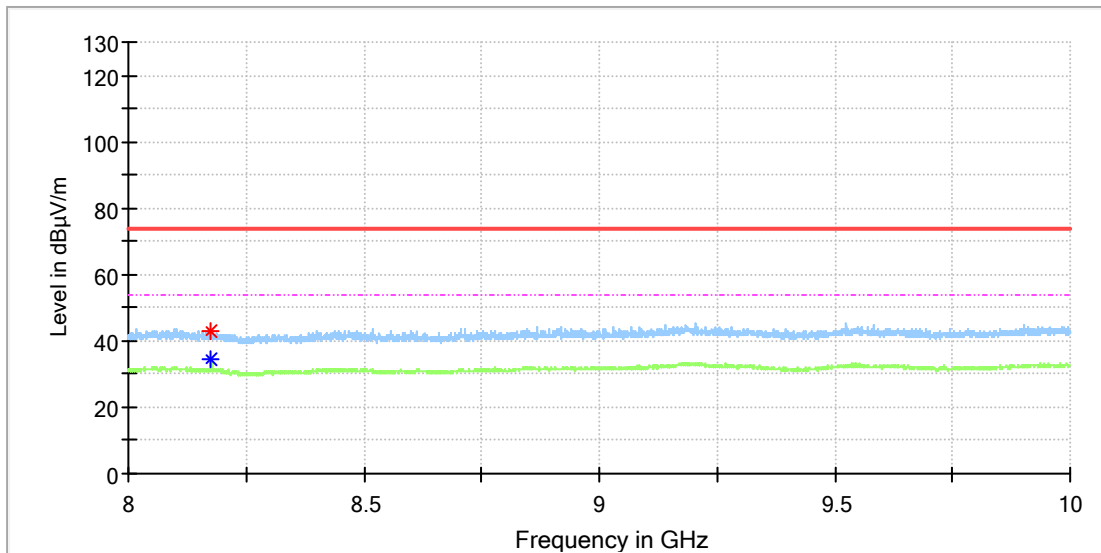


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8176.000000	---	34.21	54.00	19.79	100.0	H	190.0	8.5
8176.500000	42.88	---	74.00	31.12	100.0	H	181.0	8.5

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS125K_SF7_908.5MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

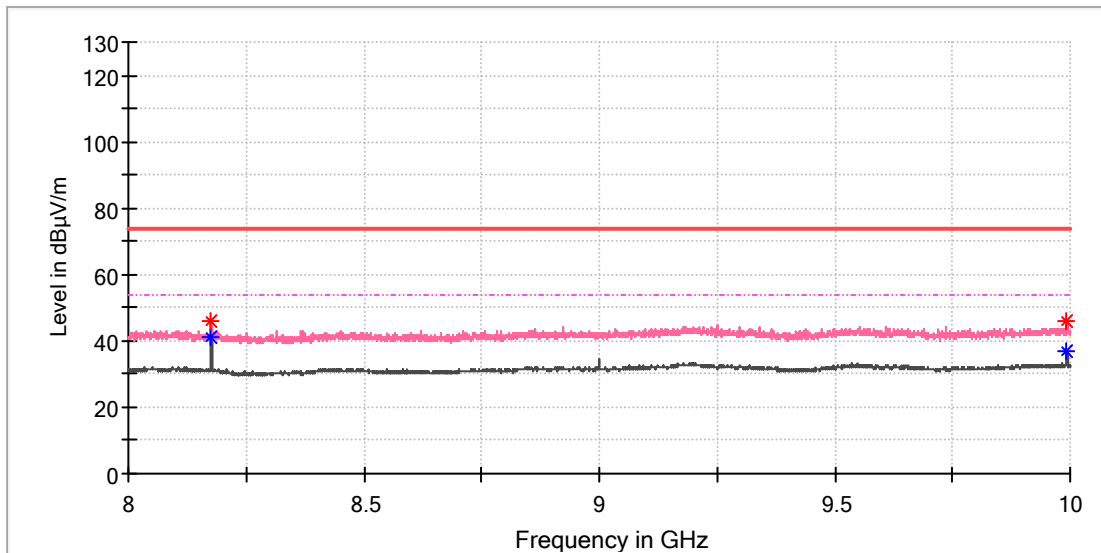


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8176.000000	45.97	---	74.00	28.03	100.0	V	349.0	8.5
8176.500000	---	41.15	54.00	12.85	100.0	V	328.0	8.5
9993.500000	45.80	---	74.00	28.20	100.0	V	177.0	10.5
9993.500000	---	36.99	54.00	17.01	100.0	V	177.0	10.5

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	FHSS125K_SF7_914.9MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

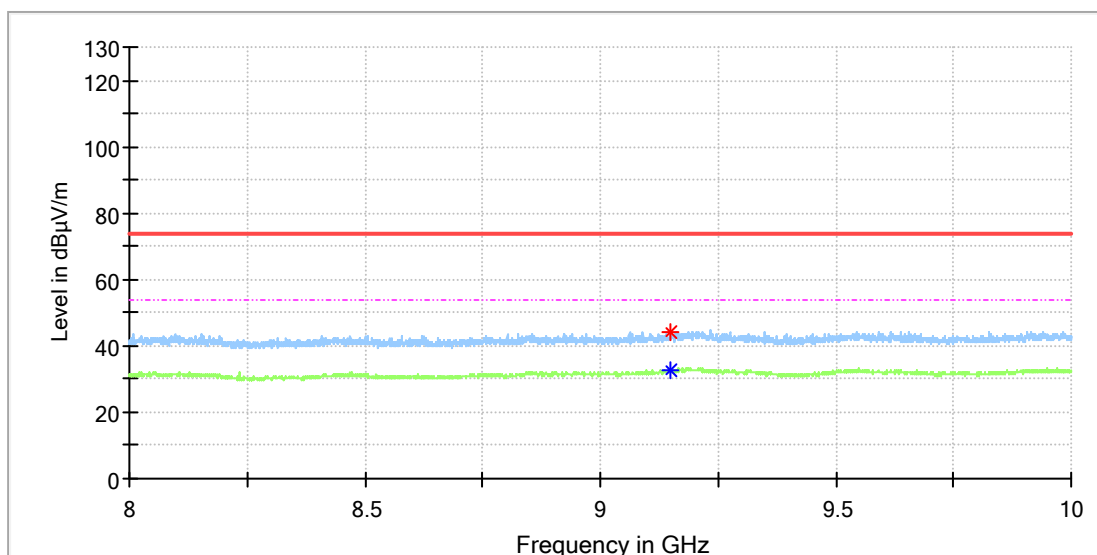


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
9148.000000	43.88	---	74.00	30.12	100.0	H	59.0	10.1
9149.000000	---	32.71	54.00	21.29	100.0	H	69.0	10.1

### EUT Information

EUT Name: WisDuo LPWAN Module  
 Model: RAK11300  
 Test Mode: FHSS125K\_SF7\_914.9MHz  
 Order No/Sample No: 168358590/A003207710-003  
 Test Voltage:: DC 5V From USB  
 Remark: Temp 22 Humi:52%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

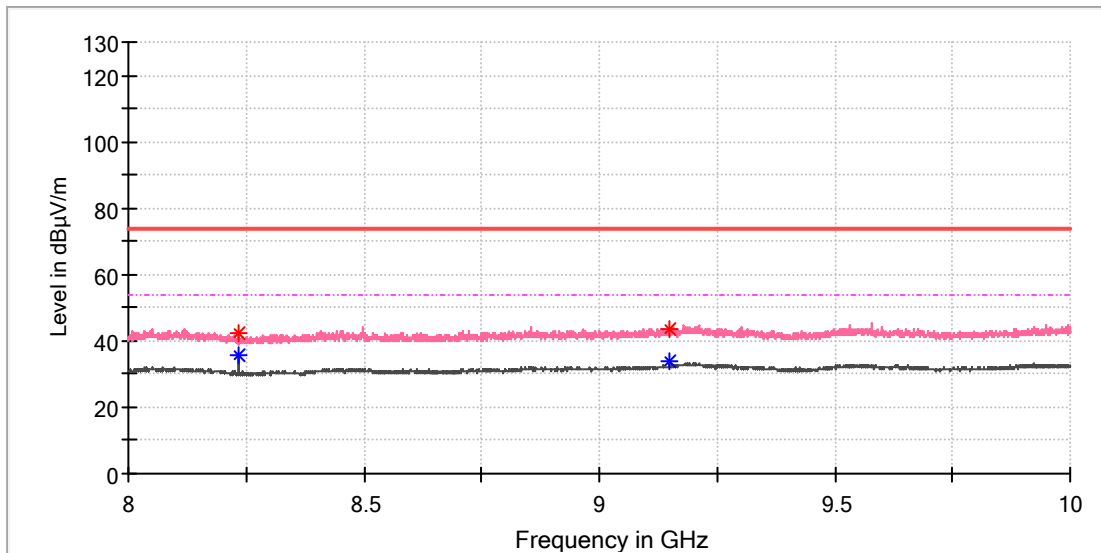


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8234.000000	42.62	---	74.00	31.38	100.0	V	339.0	8.4
8234.000000	---	35.92	54.00	18.08	100.0	V	339.0	8.4
9149.000000	---	34.03	54.00	19.97	100.0	V	280.0	10.1
9150.000000	43.84	---	74.00	30.16	100.0	V	289.0	10.1

Lora DTS, Antenna Gain: 2.3dBi

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_903MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

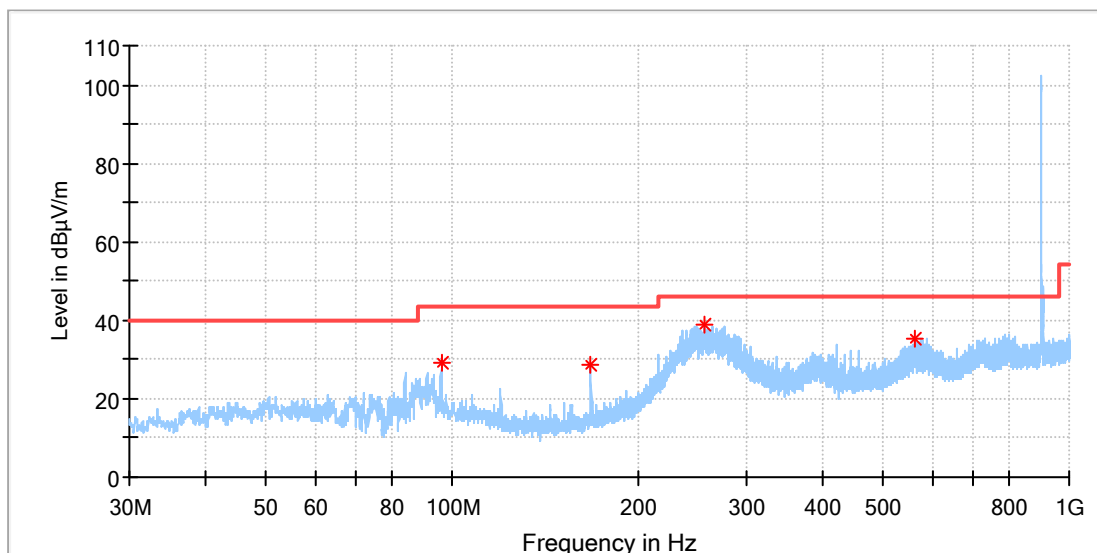


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
96.057000	29.36	43.50	14.14	100.0	H	132.0	-19.6
168.031000	28.70	43.50	14.80	100.0	H	284.0	-21.3
256.349500	38.72	46.00	7.28	100.0	H	179.0	-17.1
563.936500	35.44	46.00	10.56	100.0	H	223.0	-10.6

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_903MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

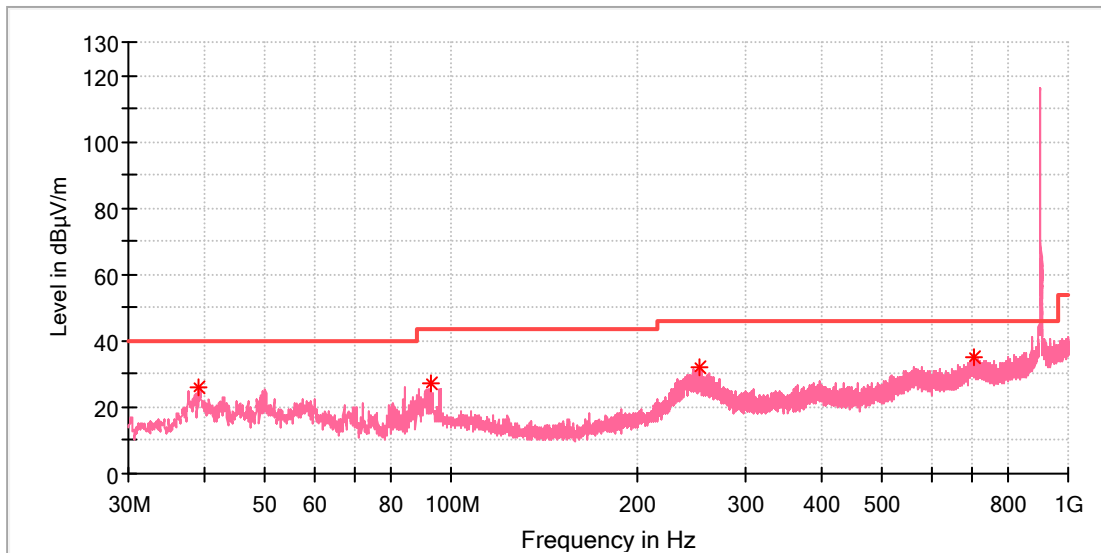


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
38.972500	25.85	40.00	14.15	100.0	V	114.0	-20.5
92.904500	27.35	43.50	16.15	100.0	V	235.0	-20.3
251.790500	31.77	46.00	14.23	100.0	V	274.0	-17.3
704.829000	34.80	46.00	11.20	100.0	V	80.0	-7.9



## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_907.8MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

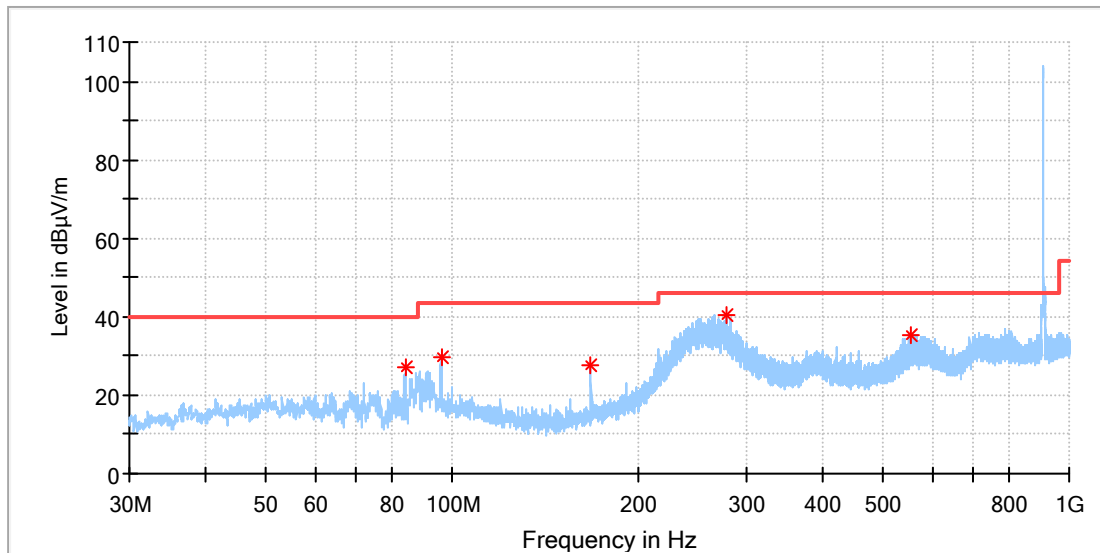


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
84.029000	27.15	40.00	12.85	100.0	H	294.0	-22.6
96.057000	29.64	43.50	13.86	100.0	H	308.0	-19.6
167.982500	27.85	43.50	15.65	100.0	H	286.0	-21.3
278.029000	40.62	46.00	5.38	100.0	H	199.0	-16.7
554.285000	35.51	46.00	10.49	100.0	H	226.0	-10.9

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_907.8MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

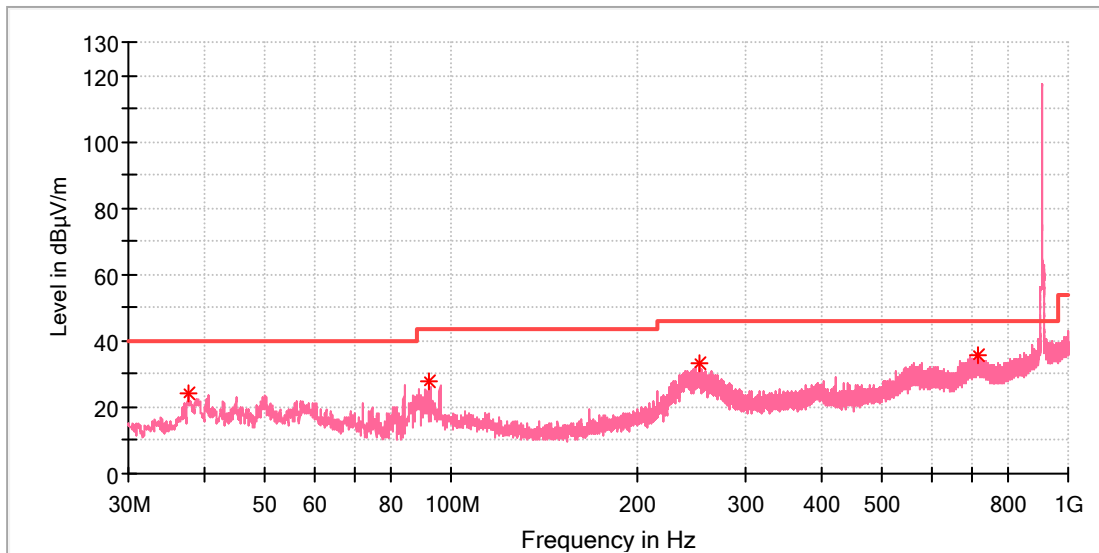


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.517500	23.97	40.00	16.03	100.0	V	262.0	-21.0
92.177000	27.76	43.50	15.74	100.0	V	209.0	-20.5
251.887500	33.12	46.00	12.88	100.0	V	255.0	-17.3
713.025500	35.66	46.00	10.34	100.0	V	63.0	-7.8

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_914.2MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

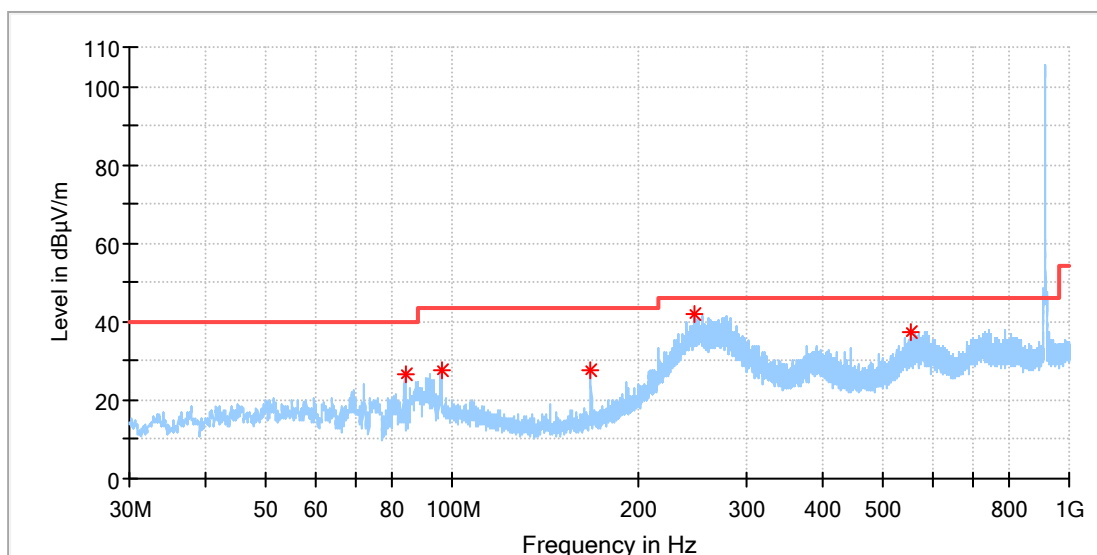


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
83.883500	26.76	40.00	13.24	100.0	H	339.0	-22.6
95.960000	27.85	43.50	15.65	100.0	H	308.0	-19.6
168.031000	27.62	43.50	15.88	100.0	H	277.0	-21.3
246.649500	41.75	46.00	4.25	100.0	H	195.0	-17.5
552.102500	37.52	46.00	8.48	100.0	H	230.0	-10.9

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_914.2MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

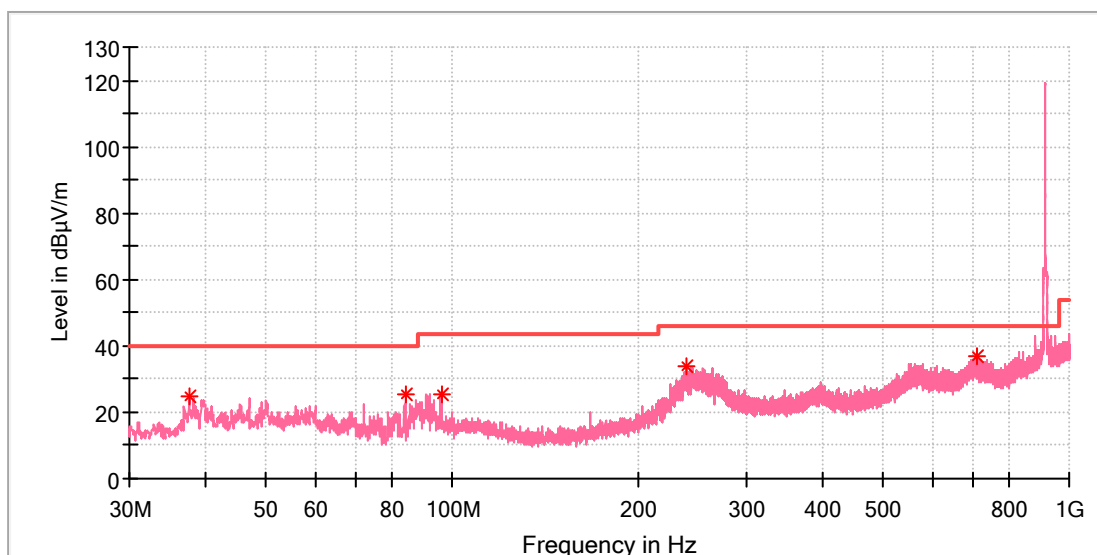


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.469000	24.57	40.00	15.43	100.0	V	326.0	-21.0
83.980500	25.32	40.00	14.68	100.0	V	219.0	-22.6
96.057000	25.31	43.50	18.19	100.0	V	249.0	-19.6
239.956500	33.88	46.00	12.12	100.0	V	281.0	-17.7
707.933000	36.68	46.00	9.32	100.0	V	90.0	-7.9

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_903MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

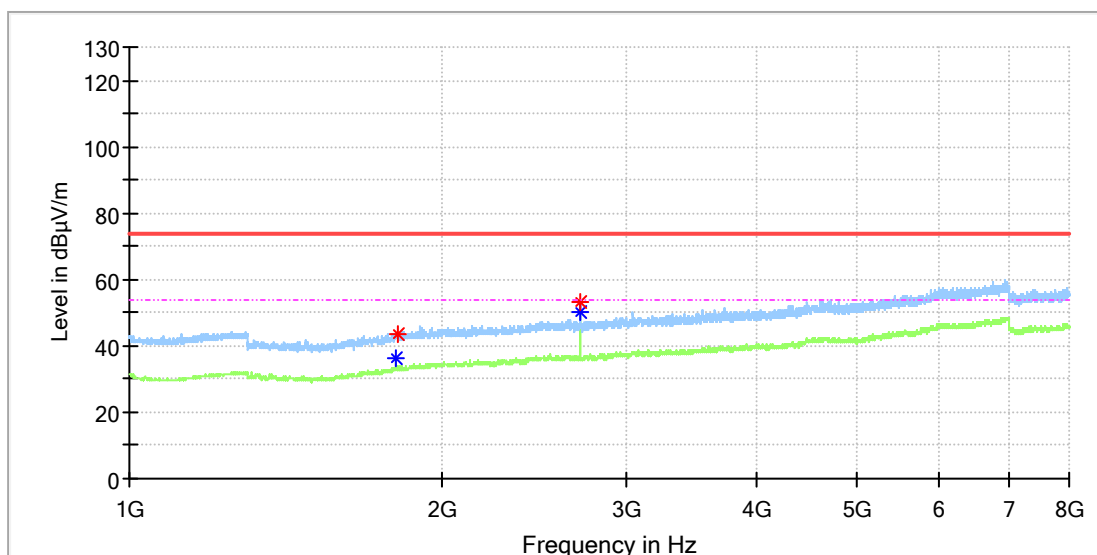


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1805.012500	---	36.26	54.00	17.74	100.0	H	253.0	4.8
1807.525000	43.74	---	74.00	30.26	100.0	H	78.0	4.8
2708.675000	53.51	---	74.00	20.49	100.0	H	144.0	7.6
2708.675000	---	50.26	54.00	3.74	100.0	H	144.0	7.6

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_903MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

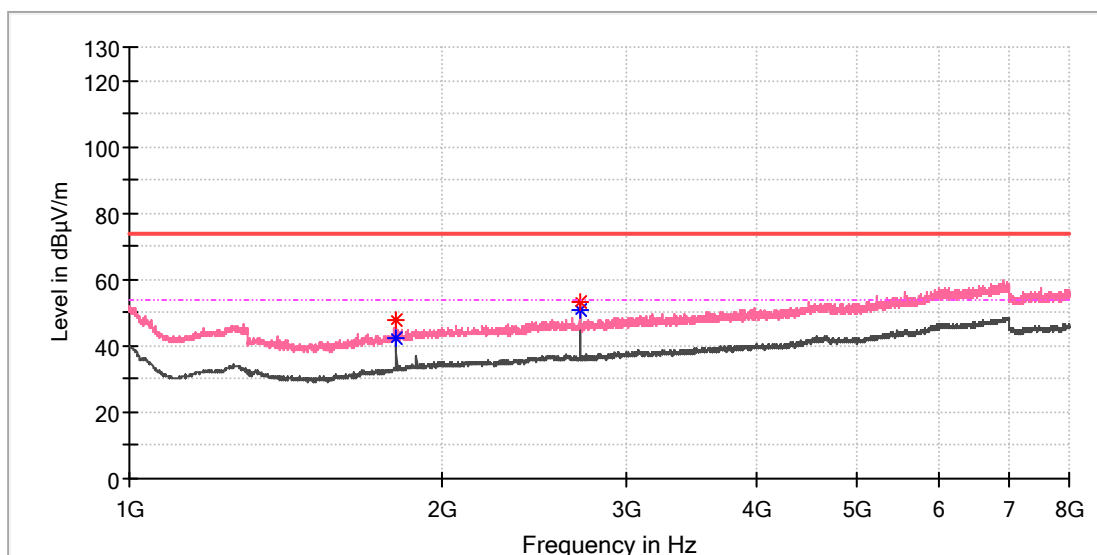


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1805.850000	47.62	---	74.00	26.38	100.0	V	62.0	4.8
1805.850000	---	42.37	54.00	11.63	100.0	V	62.0	4.8
2708.675000	53.35	---	74.00	20.65	100.0	V	263.0	7.6
2708.675000	---	50.53	54.00	3.47	100.0	V	263.0	7.6

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_907.8MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

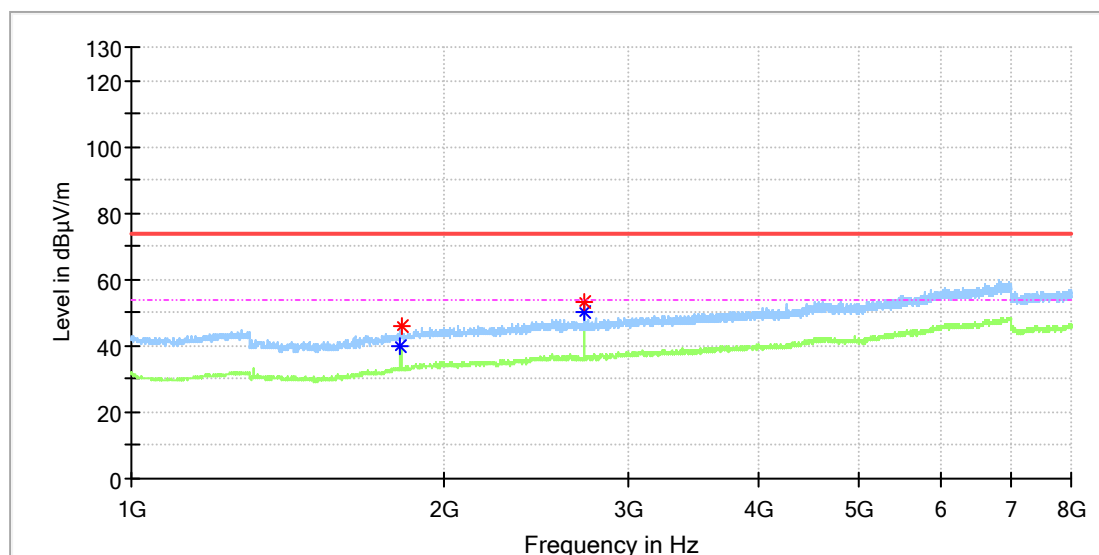


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1815.062500	---	40.05	54.00	13.95	100.0	H	111.0	4.8
1815.900000	45.99	---	74.00	28.01	100.0	H	137.0	4.8
2722.075000	53.15	---	74.00	20.85	100.0	H	263.0	7.7
2722.912500	---	50.04	54.00	3.96	100.0	H	263.0	7.7

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_907.8MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

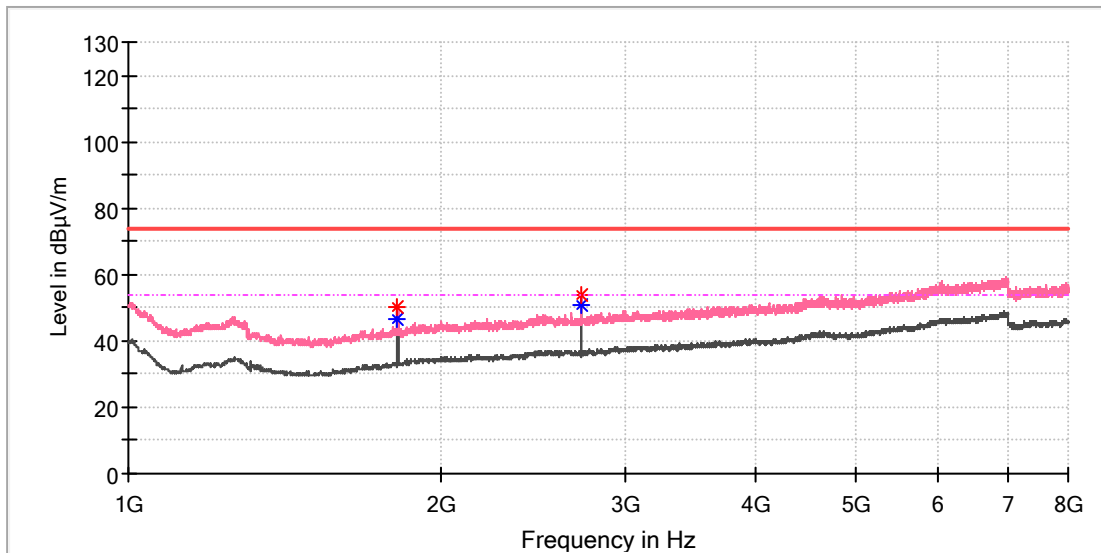


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1815.062500	49.91	---	74.00	24.09	100.0	V	95.0	4.8
1815.062500	---	46.31	54.00	7.69	100.0	V	95.0	4.8
2723.750000	53.97	---	74.00	20.03	100.0	V	252.0	7.7
2723.750000	---	50.50	54.00	3.50	100.0	V	252.0	7.7



## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_914.2MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

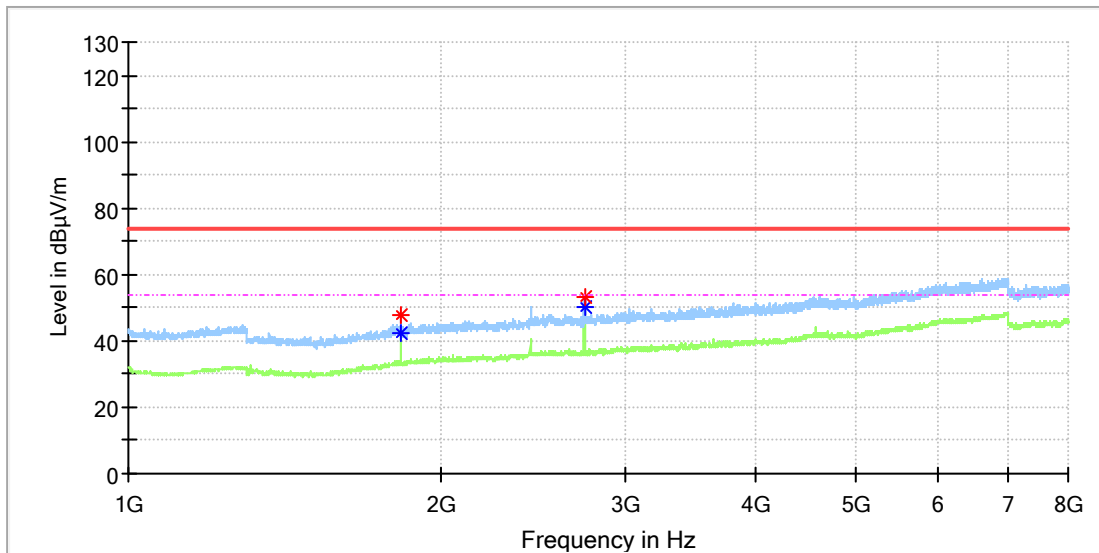


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1828.462500	47.83	---	74.00	26.17	100.0	H	133.0	4.9
1828.462500	---	42.37	54.00	11.63	100.0	H	133.0	4.9
2742.175000	---	49.91	54.00	4.09	100.0	H	151.0	7.8
2743.012500	53.02	---	74.00	20.98	100.0	H	169.0	7.8

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_914.2MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

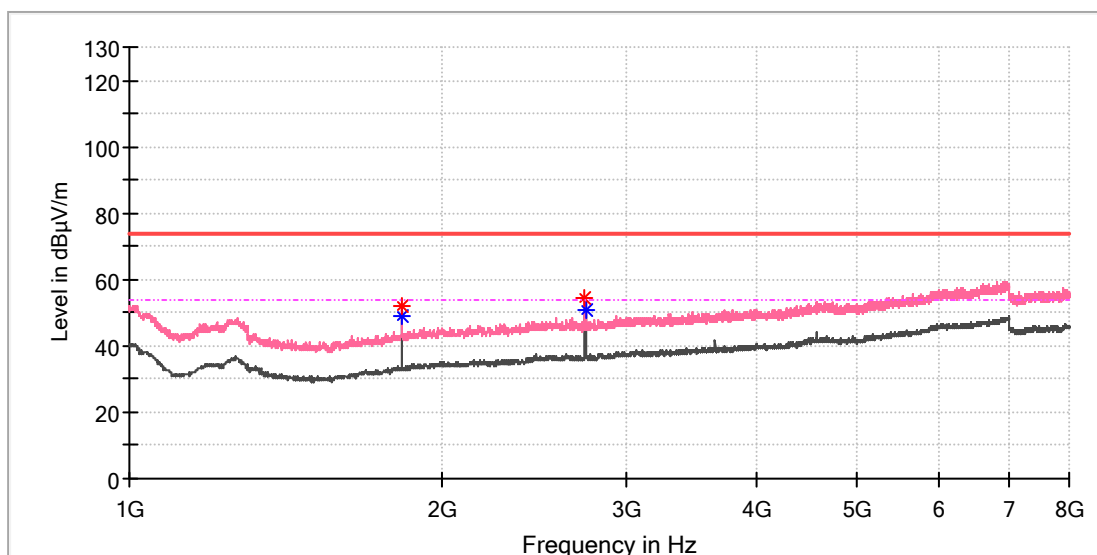


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1828.462500	---	48.74	54.00	5.26	100.0	V	259.0	4.9
1828.462500	51.98	---	74.00	22.02	100.0	V	259.0	4.9
2741.337500	54.71	---	74.00	19.29	100.0	V	285.0	7.8
2742.175000	---	50.97	54.00	3.03	100.0	V	259.0	7.8

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_903MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

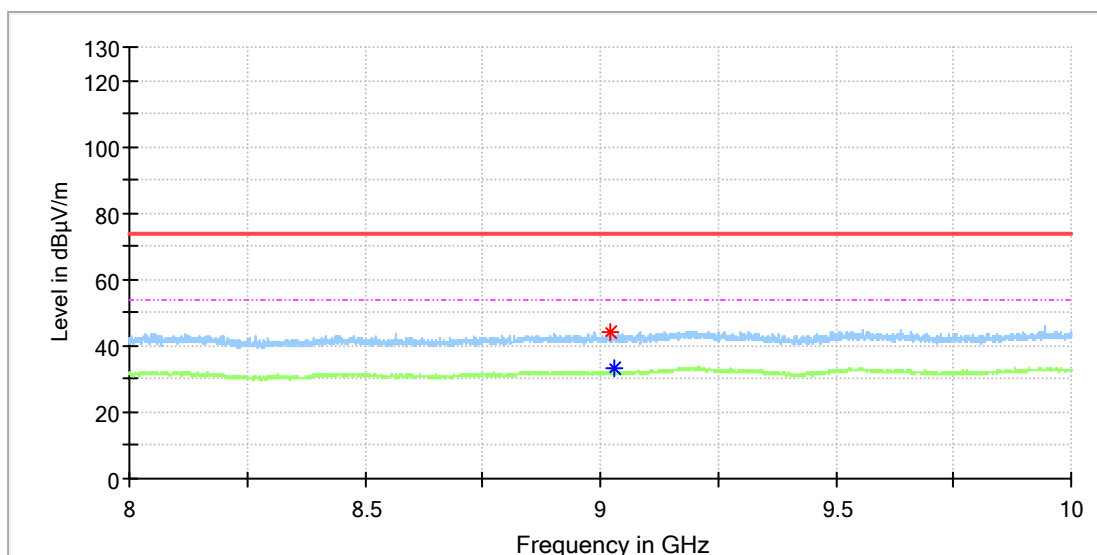


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
9020.500000	44.08	---	74.00	29.92	100.0	H	306.0	8.9
9029.000000	---	33.29	54.00	20.71	100.0	H	207.0	8.9

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_903MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

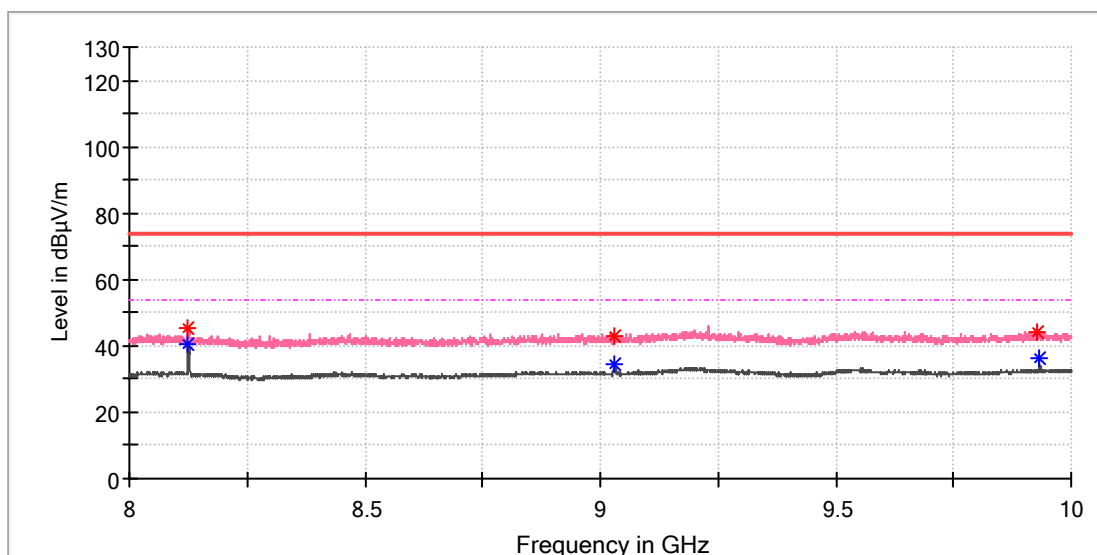


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8125.500000	45.54	---	74.00	28.46	100.0	V	338.0	8.6
8125.500000	---	40.51	54.00	13.49	100.0	V	338.0	8.6
9029.000000	42.88	---	74.00	31.12	100.0	V	297.0	8.9
9029.000000	---	34.75	54.00	19.25	100.0	V	297.0	8.9
9928.000000	44.20	---	74.00	29.80	100.0	V	4.0	10.4
9932.000000	---	36.19	54.00	17.81	100.0	V	174.0	10.4

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_907.8MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

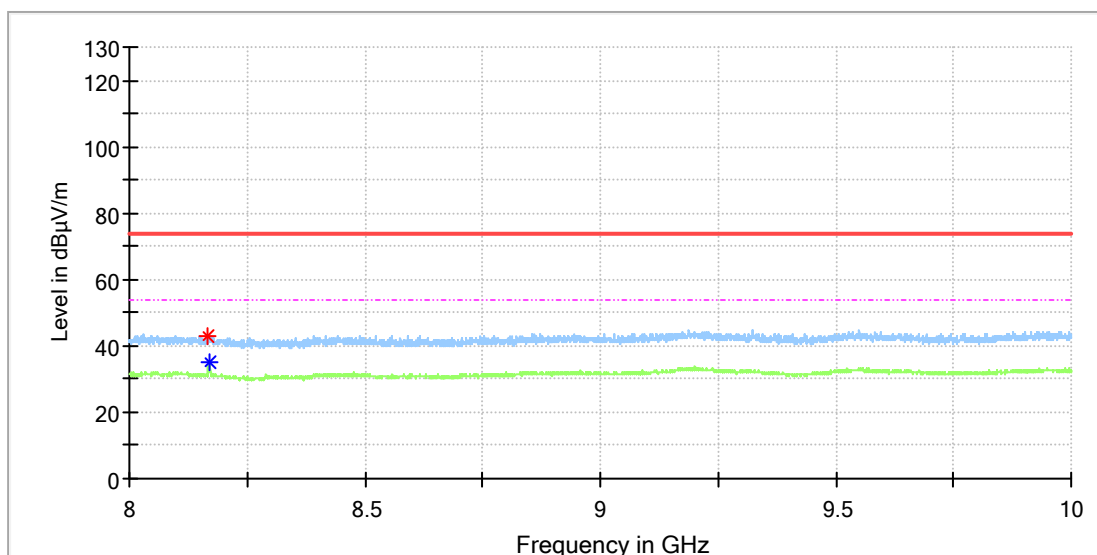


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8168.000000	42.78	---	74.00	31.22	100.0	H	128.0	8.5
8171.000000	---	34.93	54.00	19.07	100.0	H	185.0	8.5

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_907.8MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

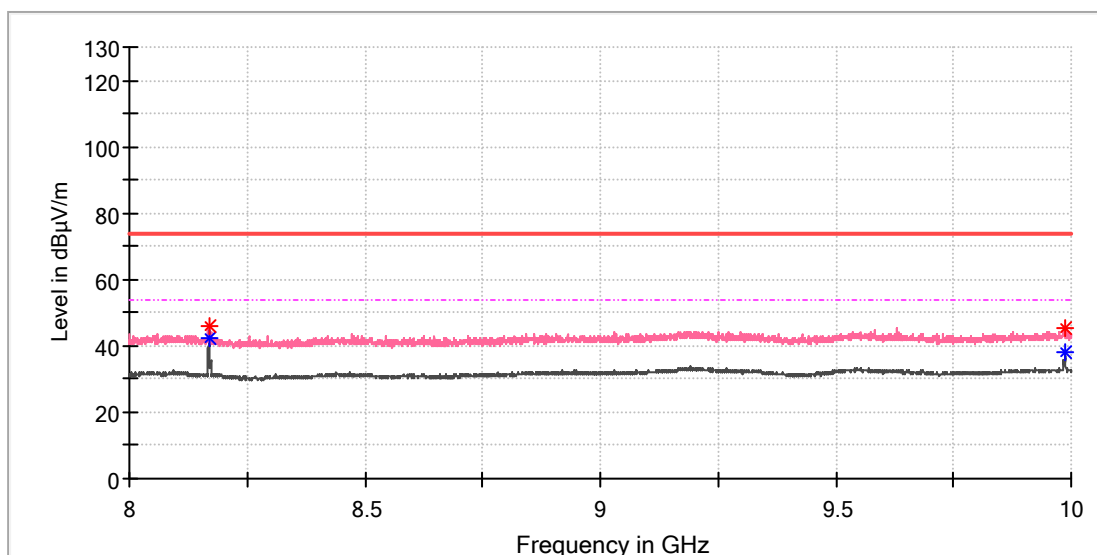


## Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8170.000000	46.15	---	74.00	27.85	100.0	V	324.0	8.5
8170.500000	---	42.09	54.00	11.91	100.0	V	324.0	8.5
9986.000000	---	38.02	54.00	15.98	100.0	V	171.0	10.5
9988.000000	45.23	---	74.00	28.77	100.0	V	182.0	10.5

### EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_914.2MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

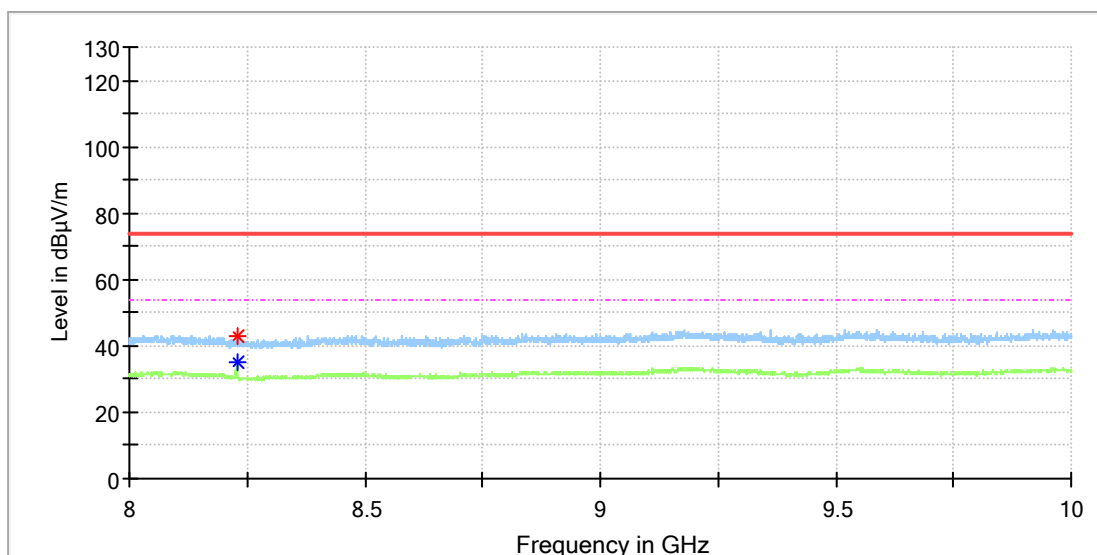


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8228.500000	43.03	---	74.00	30.97	100.0	H	24.0	8.4
8228.500000	---	35.34	54.00	18.66	100.0	H	24.0	8.4

## EUT Information

EUT Name:	WisDuo LPWAN Module
Model:	RAK11300
Test Mode:	Lora_DTS 500K_SF8_914.2MHz
Order No/Sample No:	168358590/A003207710-003
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

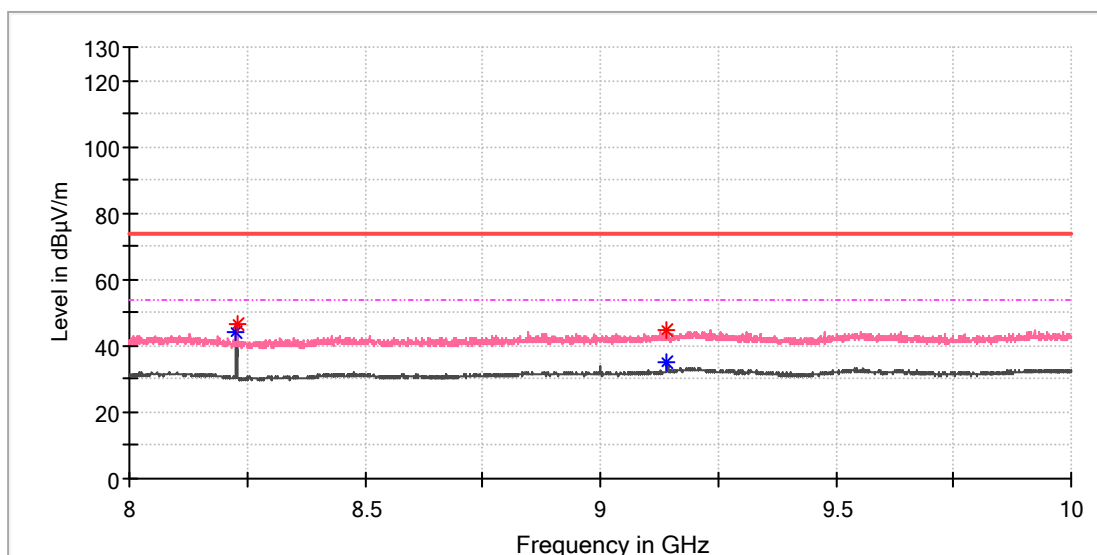

## Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8227.500000	---	43.99	54.00	10.01	100.0	V	327.0	8.4
8228.000000	46.75	---	74.00	27.25	100.0	V	304.0	8.4
9140.500000	---	34.86	54.00	19.14	100.0	V	0.0	10.0
9141.000000	44.77	---	74.00	29.23	100.0	V	294.0	10.0



## Appendix B.8: Test Results of Conducted Emission on AC Mains

### EUT Information

EUT Name: WisDuo LPWAN Module  
 Order No: 168358590\_P00577596  
 Model: RAK11300  
 Test Mode: Lora connect  
 Test Voltage: AC 120V/60Hz  
 Test By: Shower Dai  
 Review By: Gary Chen  
 Remark: SR1

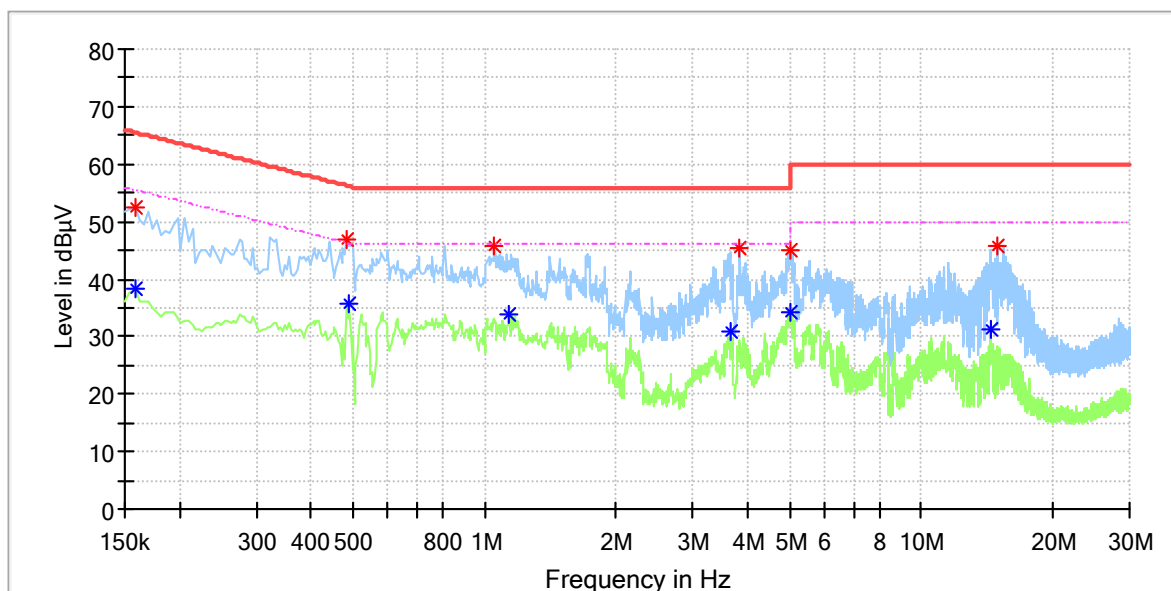


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.158000	---	38.14	55.57	17.43	L1	9.6
0.158000	52.60	---	65.57	12.97	L1	9.6
0.482000	46.90	---	56.31	9.41	L1	9.7
0.490000	---	35.86	46.17	10.31	L1	9.7
1.056000	45.68	---	56.00	10.32	L1	9.7
1.140000	---	33.84	46.00	12.16	L1	9.7
3.644000	---	30.71	46.00	15.29	L1	9.9
3.848000	45.30	---	56.00	10.70	L1	9.9
5.012000	44.85	---	60.00	15.15	L1	10.0
5.028000	---	34.31	50.00	15.69	L1	10.0
14.416000	---	31.20	50.00	18.80	L1	10.2
14.876000	45.85	---	60.00	14.15	L1	10.2

### EUT Information

EUT Name: WisDuo LPWAN Module  
 Order No: 168358590\_P00577596  
 Model: RAK11300  
 Test Mode: Lora connect  
 Test Voltage: AC 120V/60Hz  
 Test By: Shower Dai  
 Review By: Gary Chen  
 Remark: SR1

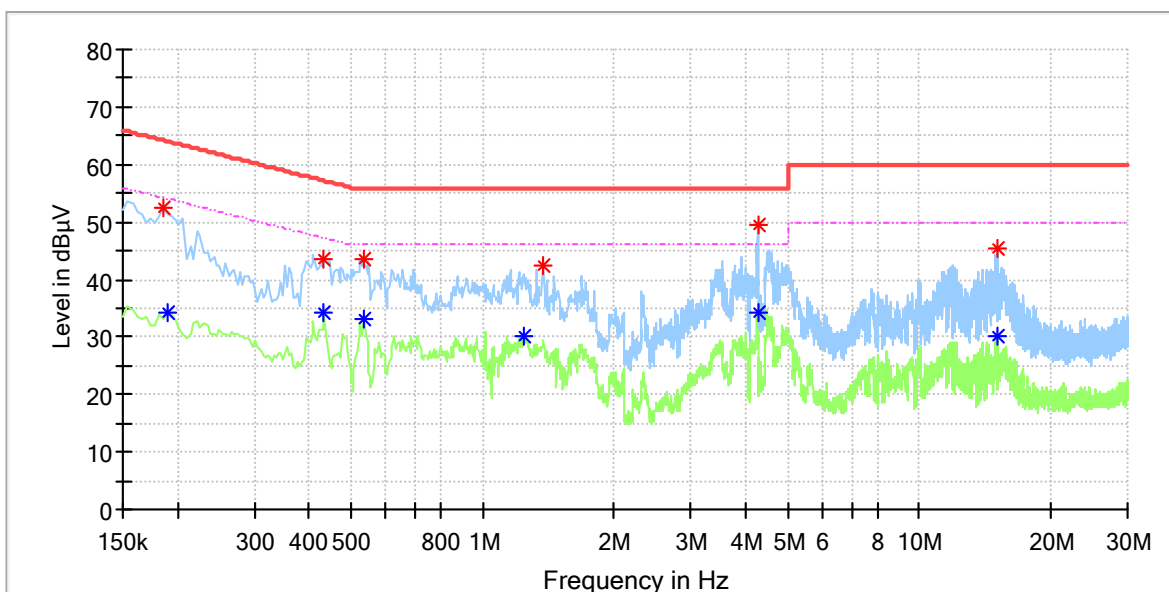

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.186000	52.33	---	64.21	11.88	N	9.6
0.190000	---	34.17	54.04	19.87	N	9.6
0.434000	---	34.25	47.18	12.93	N	9.7
0.434000	43.46	---	57.18	13.72	N	9.7
0.532000	---	33.06	46.00	12.94	N	9.7
0.532000	43.46	---	56.00	12.54	N	9.7
1.248000	---	30.15	46.00	15.85	N	9.7
1.376000	42.26	---	56.00	13.74	N	9.7
4.264000	---	34.12	46.00	11.88	N	9.9
4.264000	49.35	---	56.00	6.65	N	9.9
15.072000	---	30.32	50.00	19.68	N	10.2
15.100000	45.33	---	60.00	14.67	N	10.2