

Prüfbericht-Nr.: <i>Test report no.:</i>	CN21D0DC 002	Auftrags-Nr.: <i>Order no.:</i>	168376868	Seite 1 von 27 <i>Page 1 of 27</i>
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2022-06-10	
Auftraggeber: <i>Client:</i>	Shenzhen RAKwireless Technology Co., Ltd. Room 506, Bldg B, New Compark, Pingshan First Road, Taoyuan Street, XiLi Town Nanshan District, Shenzhen, Guangdong, P.R. China			
Prüfgegenstand: <i>Test item:</i>	Bluetooth Module			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	RAK13400			
Auftrags-Inhalt: <i>Order content:</i>	FCC and IC approval			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 CFR47 FCC Part 2.1093 RSS-247 Issue 2 February 2017 RSS-Gen Issue 5 February 2021 RSS-102 Issue 5 February 2021			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2021-10-26	Please refer to photo documents		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003277567-001 to 005			
Prüfzeitraum: <i>Testing period:</i>	2021-10-28 – 2022-06-18			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	genehmigt von: <i>authorized by:</i>			
Datum: <i>Date:</i> 2022-06-25				
	Signed by: Alex Lan		Signed by: Lin Lin	
Stellung / Position	Assistant Project Manager	Stellung / Position	Reviewer	
Sonstiges / Other:				
This test report based on original FCC ID & IC for alternative antennas. FCC ID: 2AF6B-RAK13400 IC: 25908-RAK13400 HVIN: RAK13400				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged:</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specifications(s) F(ail) = failed a.m. test specifications(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 99%dB BANDWIDTH

RESULT: Pass

5.1.5 6dB BANDWIDTH

RESULT: Pass

5.1.6 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHZ BANDWIDTH

RESULT: Pass

5.1.7 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.8 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

6.1.1 ELECTROMAGNETIC FIELDS

RESULT: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES.....	4
2.1	TEST FACILITIES.....	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACEABILITY.....	7
2.4	CALIBRATION.....	7
2.5	MEASUREMENT UNCERTAINTY	7
2.6	LOCATION OF ORIGINAL DATA	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION.....	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS.....	13
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	13
5.1.1	<i>Antenna Requirement.....</i>	<i>13</i>
5.1.2	<i>Maximum Conducted Output Power</i>	<i>14</i>
5.1.3	<i>Conducted Power Spectral Density.....</i>	<i>17</i>
5.1.4	<i>99%dB Bandwidth.....</i>	<i>19</i>
5.1.5	<i>6dB Bandwidth.....</i>	<i>21</i>
5.1.6	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth</i>	<i>23</i>
5.1.7	<i>Radiated Spurious Emission.....</i>	<i>24</i>
5.1.8	<i>Conducted Emission on AC Mains.....</i>	<i>25</i>
6	SAFETY HUMAN EXPOSURE	26
6.1	RADIO FREQUENCY EXPOSURE COMPLIANCE	26
6.1.1	<i>Electromagnetic Fields</i>	<i>26</i>
7	PHOTOGRAPHS OF THE TEST SET-UP.....	27
8	LIST OF TABLES	27

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results of Conducted & Radiated Testing

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

No. 362 Huanguan Road Middle, Longhua District, Shenzhen 518110, People's Republic of China

FCC Registration No.: 694916

IC Registration No.: 25069, CAB identifier: CN0078

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
Wireless Connectivity Tester	R&S	CMW270	101375	09.08.2022
Signal Analyzer	R&S	FSV 40	101441	09.08.2022
Vector Signal Generator	R&S	SMBV100A	263301	09.08.2022
Signal Generator	R&S	SMB100A	115186	09.08.2022
OSP	R&S	OSP 150	101017	02.12.2022
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A
Power Meter	R&S	NRP2	107105	02.12.2022
Power Sensor	R&S	NRP-Z81	105677	09.08.2022
Humid & Temp Programmable Tester	BOST	NTH090-60	19040801	02.04.2023
Shielding Room 8#	Albatross	SR8	APC17151-SR8	22.06.2024
Unwanted Emission Testing				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR 7	102021	10.08.2022
Signal Analyzer	R&S	FSV 40	101439	09.08.2022
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	09.08.2022
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	09.08.2022
Amplifier	R&S	SCU-18F	180070	09.08.2022
Amplifier	R&S	SCU40A	100475	09.08.2022
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	08.08.2022
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	08.08.2022
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	08.08.2022
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	13.09.2022
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A

Prüfbericht - Nr.: CN21D0DC 002
Test Report No.Seite 6 von 27
Page 6 of 27

3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	22.06.2024
Conducted Emissions testing				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102428	16.08.2022
Artificial Mains Network	R&S	ENV216	102333	16.08.2022
EMC32 test software	R&S	EMC32(Ver.10.50.01)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Item		Extended Uncertainty
Conducted Emission		± 2.74 dB
Radiated Emission (30-1000MHz)	Field strength (dBµV/m)	4.27dB
Radiated Emission (above 1000MHz)	Field strength (dBµV/m)	4.46dB
Radio Spectrum		± 1.5 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No. 362 Huanguan Road Middle, Longhua District, Shenzhen 518110, People's Republic of China. is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a Bluetooth Module, it supports Bluetooth Low Energy wireless technology.

This test report based on original FCC ID & IC for alternative antennas, the alternative antenna specifications as below, conducted output power and radiated spurious emissions were arranged retest.

Model	Antenna Gain	Antenna Type
SA06LWEG01RA	3.4dBi	IPEX connector
SA04WEG01RA	4.7dBi	IPEX connector

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment	Bluetooth Module
Type Designation	RAK13400
FCC ID	2AF6B-RAK13400
IC	25908-RAK13400
HVIN	RAK13400
Operating Voltage	DC 3.63 V Max. (Supplied by socket of PCB board)
Testing Voltage	DC 5V via USB interface
Technical Specification of Bluetooth Low Energy	
Operating Frequency	2402 – 2480 MHz
Data rate	125kbps, 500kbps, 1Mbps, 2Mbps
Channel Number	40 channels
Channel separation	2MHz
Modulation	GFSK
Antenna Type	Dedicated antenna
Smart Antenna Systems:	Not Applicable

Table 3: RF Channel and Frequency of Bluetooth Low Energy

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
00	2402.00	10	2422.00	20	2442.00	30	2462.00
01	2404.00	11	2424.00	21	2444.00	31	2464.00
02	2406.00	12	2426.00	22	2446.00	32	2466.00
03	2408.00	13	2428.00	23	2448.00	33	2468.00
04	2410.00	14	2430.00	24	2450.00	34	2470.00
05	2412.00	15	2432.00	25	2452.00	35	2472.00
06	2414.00	16	2434.00	26	2454.00	36	2474.00
07	2416.00	17	2436.00	27	2456.00	37	2476.00
08	2418.00	18	2438.00	28	2458.00	38	2478.00
09	2420.00	19	2440.00	29	2460.00	39	2480.00

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, transmitting mode
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. On, Operating
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- Block Diagram
- FCC/IC Label and Location Info
- Operation Description
- Photo Document
- Schematics
- User Manual

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013.

According to the clause 3.1, all test were applied on model RAK13400 with two antennas.

4.3 Special Accessories and Auxiliary Equipment

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N
Notebook	Lenovo	ThinkPad X260	N/A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

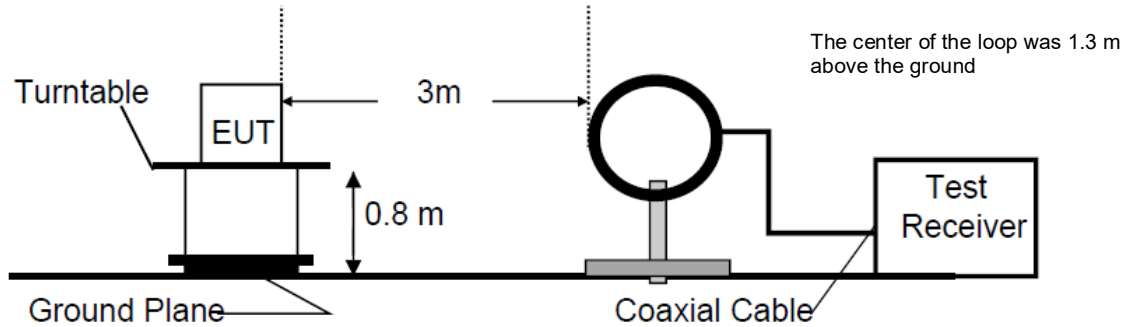


Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

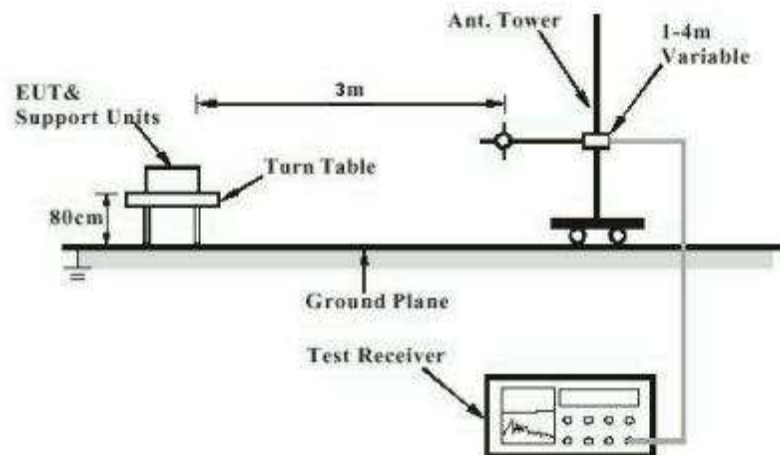


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

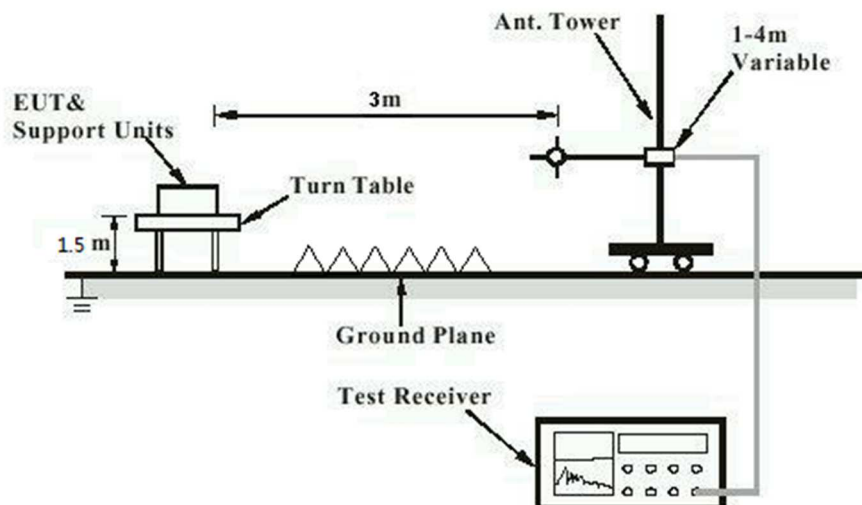


Diagram of Measurement Configuration for Mains Conduction Measurement


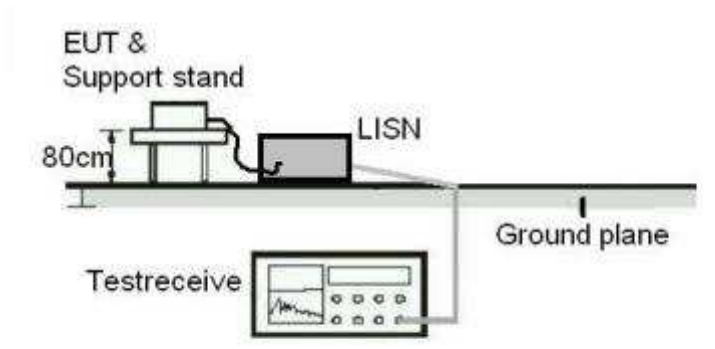


Diagram of Measurement Configuration for Conducted Transmitter Measurement

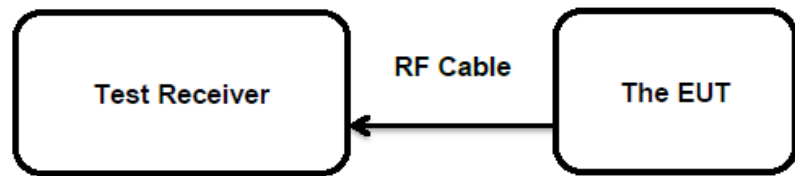

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass****Test Specification**

Test standard	:	FCC Part 15.247(b)(4) and Part 15.203
	:	RSS-Gen Clause 6.7
Limit	:	the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declared, the EUT has an Dedicated antenna , the directional gain of antenna is 3.4dBi or 4.7dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Maximum Conducted Output Power

RESULT:**Pass****Test Specification**

Test standard	:	FCC Part 15.247(b)(3) RSS-247 Clause 5.4(d)
Basic standard	:	ANSI C63.10: 2013
Limits	:	< 1 Watt (Maximum Conducted Peak Power) e.i.r.p. <4W
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2022-06-15
Input voltage	:	DC 5V
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	24.8 °C
Relative humidity	:	53 %
Atmospheric pressure	:	101 kPa

For details refer to following test result.

Table 5: Test Result of Maximum Conducted Output Power, 125Kbps

Channel	Channel Frequency (MHz)	Conducted Peak Output Power		Limit (W)
		(dBm)	(W)	
Low Channel	2402	4.1	0.00257	1
Middle Channel	2440	4.4	0.00275	1
High Channel	2480	4.9	0.00309	1

Channel	Channel Frequency (MHz)	Conducted Average Output Power		Limit (W)
		(dBm)	(W)	
Low Channel	2402	3.8	0.00240	1
Middle Channel	2440	4.1	0.00257	1
High Channel	2480	4.4	0.00275	1

Table 6: Test Result of Maximum Conducted Output Power, 500Kbps

Channel	Channel Frequency (MHz)	Conducted Peak Output Power		Limit (W)
		(dBm)	(W)	
Low Channel	2402	4.1	0.00257	1
Middle Channel	2440	4.4	0.00275	1
High Channel	2480	4.9	0.00309	1

Channel	Channel Frequency (MHz)	Conducted Average Output Power		Limit (W)
		(dBm)	(W)	
Low Channel	2402	3.8	0.00240	1
Middle Channel	2440	4.1	0.00257	1
High Channel	2480	4.5	0.00282	1

Table 7: Test Result of Maximum Conducted Output Power, 1Mbps

Channel	Channel Frequency (MHz)	Conducted Peak Output Power		Limit
		(dBm)	(W)	
Low Channel	2402	3.9	0.00245	1
Middle Channel	2440	4.2	0.00263	1
High Channel	2480	4.7	0.00295	1

Channel	Channel Frequency (MHz)	Conducted Average Output Power		Limit
		(dBm)	(W)	
Low Channel	2402	3.6	0.00229	1
Middle Channel	2440	4.0	0.00251	1
High Channel	2480	4.3	0.00269	1

Table 8: Test Result of Maximum Conducted Output Power, 2Mbps

Channel	Channel Frequency (MHz)	Conducted Peak Output Power		Limit
		(dBm)	(W)	
Low Channel	2402	5.6	0.00363	1
Middle Channel	2440	5.7	0.00372	1
High Channel	2480	6.2	0.00417	1

Channel	Channel Frequency (MHz)	Conducted Average Output Power		Limit
		(dBm)	(W)	
Low Channel	2402	3.5	0.00224	1
Middle Channel	2440	3.8	0.00240	1
High Channel	2480	4.2	0.00263	1

Note: The cable loss is taken into account in results and the e.i.r.p. is 10.9 dBm less than 4W (36 dBm).

5.1.3 Conducted Power Spectral Density

RESULT:**Pass****Test Specification**

Test standard	:	FCC Part 15.247(e) RSS-247 Clause 5.2(b)
Basic standard	:	ANSI C63.10: 2013
Limits	:	8 dBm / 3kHz
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2021-11-10
Input voltage	:	DC 5V
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	24.8 °C
Relative humidity	:	53 %
Atmospheric pressure	:	101 kPa

For details refer to following test result.

Table 9: Test Result of Power Spectral Density, 125Kbps

Channel	Channel Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
Low Channel	2402	-2.60	8
Middle Channel	2440	-2.34	8
High Channel	2480	-1.94	8

Table 10: Test Result of Power Spectral Density, 500Kbps

Channel	Channel Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
Low Channel	2402	-2.70	8
Middle Channel	2440	-2.53	8
High Channel	2480	-1.89	8

Table 11: Test Result of Power Spectral Density, 1Mbps

Channel	Channel Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
Low Channel	2402	-11.43	8
Middle Channel	2440	-12.48	8
High Channel	2480	-11.59	8

Table 12: Test Result of Power Spectral Density, 2Mbps

Channel	Channel Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
Low Channel	2402	-13.72	8
Middle Channel	2440	-14.64	8
High Channel	2480	-14.21	8

Note: The cable loss is taken into account in results.

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN21D0DC 002
Test Report No.Seite 19 von 27
Page 19 of 27

5.1.4 99%dB Bandwidth

RESULT:

Pass

Test Specification

Test standard : RSS-Gen clause 6.7
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded Room

Test Setup

Date of testing : 2021-11-09
Input voltage : DC 5V
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 24.8 °C
Relative humidity : 53 %
Atmospheric pressure : 101 kPa

Table 13: Test Result of 99% Bandwidth, 125Kbps

Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)	Limit (MHz)	Result
Low Channel	2402	1050	/	Pass
Mid Channel	2440	1055	/	Pass
High Channel	2480	1055	/	Pass

Table 14: Test Result of 99% Bandwidth, 500Kbps

Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)	Limit (MHz)	Result
Low Channel	2402	1025	/	Pass
Mid Channel	2440	1025	/	Pass
High Channel	2480	1025	/	Pass

Table 15: Test Result of 99% Bandwidth, 1Mbps

Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)	Limit (MHz)	Result
Low Channel	2402	1030	/	Pass
Mid Channel	2440	1035	/	Pass
High Channel	2480	1030	/	Pass

Table 16: Test Result of 99% Bandwidth, 2Mbps

Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)	Limit (MHz)	Result
Low Channel	2402	2060	/	Pass
Mid Channel	2440	2080	/	Pass
High Channel	2480	2080	/	Pass

For the measurement records, refer to the appendix B.

5.1.5 6dB Bandwidth

RESULT:**Pass****Test Specification**

Test standard	:	FCC Part 15.247(a)(2) RSS-247 Clause 5.2(a)
Basic standard	:	ANSI C63.10: 2013
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2021-11-09
Input voltage	:	DC 5V
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	24.8 °C
Relative humidity	:	53 %
Atmospheric pressure	:	101 kPa

Table 17: Test Result of 6dB Bandwidth, 125Kbps

Channel	Channel Frequency (MHz)	-6dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	712.872	500	Pass
Mid Channel	2440	732.674	500	Pass
High Channel	2480	732.674	500	Pass

Table 18: Test Result of 6dB Bandwidth, 500Kbps

Channel	Channel Frequency (MHz)	-6dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	693.070	500	Pass
Mid Channel	2440	693.070	500	Pass
High Channel	2480	693.070	500	Pass

Table 19: Test Result of 6dB Bandwidth, 1Mbps

Channel	Channel Frequency (MHz)	-6dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	752.476	500	Pass
Mid Channel	2440	752.476	500	Pass
High Channel	2480	752.476	500	Pass

Table 20: Test Result of 6dB Bandwidth, 2Mbps

Channel	Channel Frequency (MHz)	-6dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	1228	500	Pass
Mid Channel	2440	1267	500	Pass
High Channel	2480	1267	500	Pass

For the measurement records, refer to the appendix B.

5.1.6 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

RESULT:**Pass****Test Specification**

Test standard	:	FCC Part 15.247(d) RSS-247 Clause 5.5
Basic standard	:	ANSI C63.10: 2013
Limits	:	20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2021-11-10
Input voltage	:	DC 5V
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	24.8 °C
Relative humidity	:	53 %
Atmospheric pressure	:	101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix B.

5.1.7 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	:	FCC Part 15.247(d) & FCC Part 15.205 RSS-247 Clause 3.3 & 5.5
Basic standard	:	ANSI C63.10: 2013
Limits	:	Refer to 15.209(a) of FCC part 15.247(d) RSS-Gen Table 4 & Table 5
Kind of test site	:	3m Semi-anechoic Chamber

Test Setup

Date of testing	:	2022-06-15 to 2022-06-18
Input voltage	:	DC 5V
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	22 °C
Relative humidity	:	55 %
Atmospheric pressure	:	101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix B.

5.1.8 Conducted Emission on AC Mains

RESULT:**Pass****Test Specification**

Test standard	:	FCC Part 15.207(a) RSS-Gen Clause 8.8
Basic standard	:	ANSI C63.10: 2013
Frequency range	:	0.15 – 30MHz
Limits	:	FCC Part 15.207(a) RSS-Gen Table 4
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2021-10-28
Input voltage	:	AC 120V/60Hz
Operation mode	:	B
Earthing	:	Not connected
Ambient temperature	:	24.8 °C
Relative humidity	:	53 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix B.

6 Safety Human Exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields

RESULT:**Pass****Test Specification**

Test standard : FCC KDB Publication 447498 v06
CFR47 FCC Part 2: Section 2.1093
CFR47 FCC Part 1: Section 1.1310
RSS-102 Issue 5 February 2021

This module has two different antennas, and the maximum e.i.r.p. configuration be evaluated as below:

FCC requirement:

The measured maximum conducted output power of the EUT is 6.2dBm \approx 4.17mW, which is far below the SAR exclusion threshold level 10mW (SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and \leq 50 mm), hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498 D01: Mobile and Portable RF Exposure. Guidance v06.

IC requirements: The EUT shall comply with the requirement of RSS-102 section 2.5.2.

Exemption from Routine Evaluation Limits – RF Exposure Evaluation

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;

- RF exposure evaluation exempted power for BLE: 2.67 W

The worst-case mode (the configuration having highest EIRP) specified:

BLE: 6.20 dBm

Antenna Gain: 4.7 dBi

The Max. e.i.r.p. for Lora DTS: 10.80dBm = 0.012 W

The e.i.r.p. for the BLE are less than the RF exposure evaluation exempted power. So RF exposure evaluation is not required.

“RF Radiation Exposure Statement Caution: This Transmitter must be installed to provide a separation distance of at least 20 cm from all persons.”

7 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

8 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Technical Specification of EUT	8
Table 3: RF Channel and Frequency of Bluetooth Low Energy.....	9
Table 4: List of Accessories and Auxiliary Equipment.....	10
Table 5: Test Result of Maximum Conducted Output Power, 125Kbps.....	15
Table 6: Test Result of Maximum Conducted Output Power, 500Kbps.....	15
Table 7: Test Result of Maximum Conducted Output Power, 1Mbps	16
Table 8: Test Result of Maximum Conducted Output Power, 2Mbps	16
Table 9: Test Result of Power Spectral Density, 125Kbps	18
Table 10: Test Result of Power Spectral Density, 500Kbps	18
Table 11: Test Result of Power Spectral Density, 1Mbps	18
Table 12: Test Result of Power Spectral Density, 2Mbps	18
Table 13: Test Result of 99% Bandwidth, 125Kbps	20
Table 14: Test Result of 99% Bandwidth, 500Kbps	20
Table 15: Test Result of 99% Bandwidth, 1Mbps	20
Table 16: Test Result of 99% Bandwidth, 2Mbps	20
Table 17: Test Result of 6dB Bandwidth, 125Kbps.....	22
Table 18: Test Result of 6dB Bandwidth, 500Kbps.....	22
Table 19: Test Result of 6dB Bandwidth, 1Mbps	22
Table 20: Test Result of 6dB Bandwidth, 2Mbps	22


Appendix B: Test Results

APPENDIX B: TEST RESULTS	1
APPENDIX B.1: CONDUCTED POWER SPECTRAL DENSITY	2
<i>BLE, 125Kbps</i>	2
<i>BLE, 500Kbps</i>	3
<i>BLE, 1Mbps</i>	5
<i>BLE, 2Mbps</i>	6
APPENDIX B.2: 6DB BANDWIDTH	8
<i>BLE, 125Kbps</i>	8
<i>BLE, 500Kbps</i>	9
<i>BLE, 1Mbps</i>	11
<i>BLE, 2Mbps</i>	12
APPENDIX B.3: 99% BANDWIDTH	14
<i>BLE, 125Kbps</i>	14
<i>BLE, 500Kbps</i>	15
<i>BLE, 1Mbps</i>	17
<i>BLE, 2Mbps</i>	18
APPENDIX B.4: CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH	20
<i>BLE, 1Mbps</i>	20
<i>BLE, 2Mbps</i>	24
APPENDIX B.5: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	28
APPENDIX B.6: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	56
APPENDIX B.7: TEST RESULTS OF CONDUCTED EMISSIONS ON AC MAINS	64

Appendix B.1: Conducted Power Spectral Density


BLE, 125Kbps

Low Channel

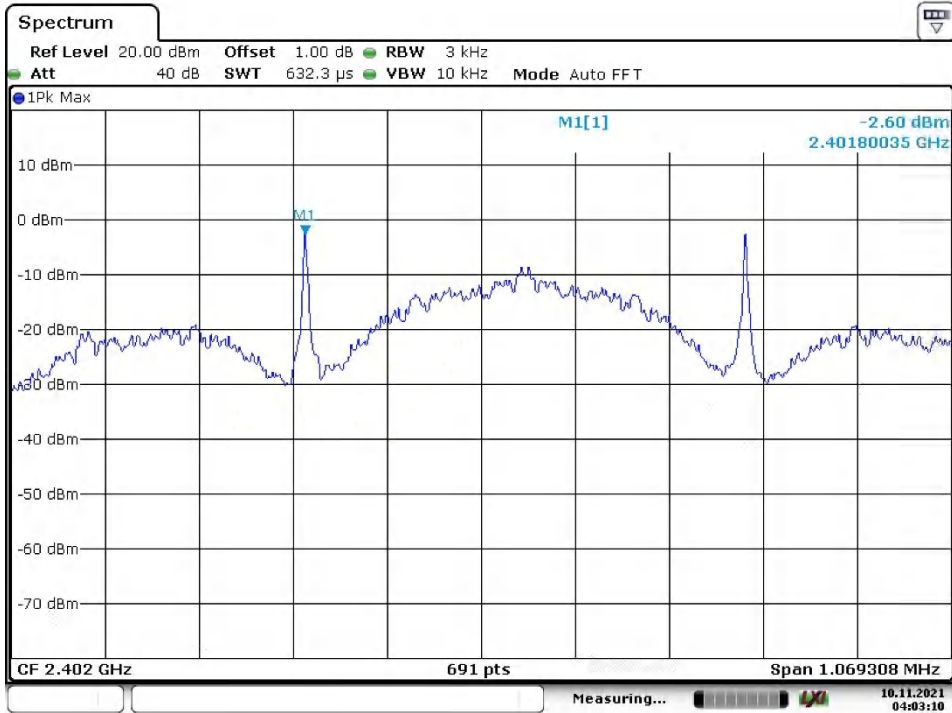


Date: 10.NOV.2021 04:03:10

Middle Channel

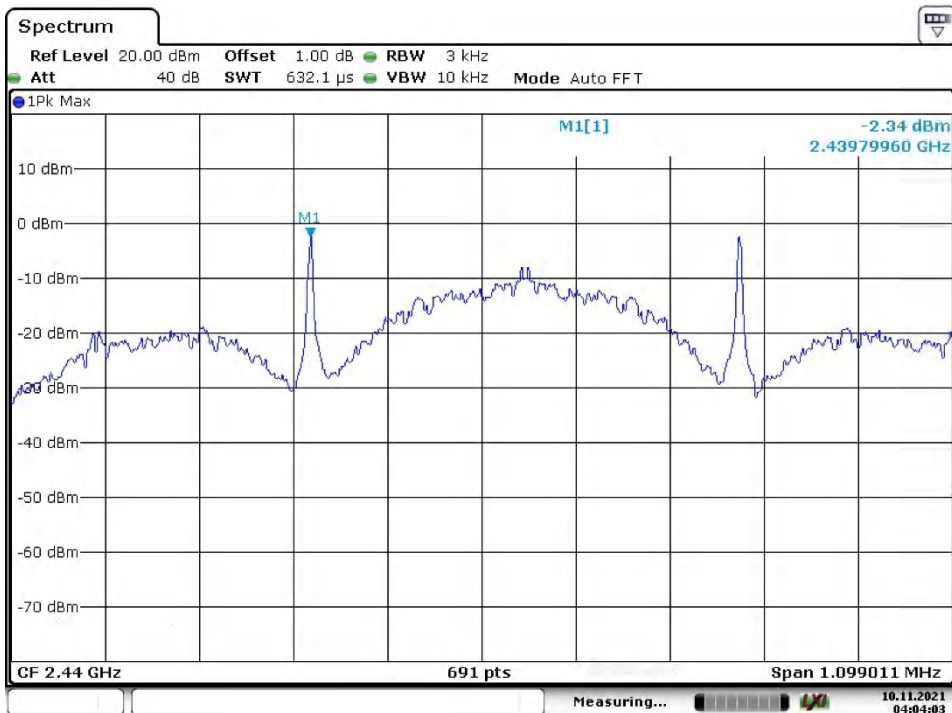

Date: 10.NOV.2021 04:04:03


High Channel

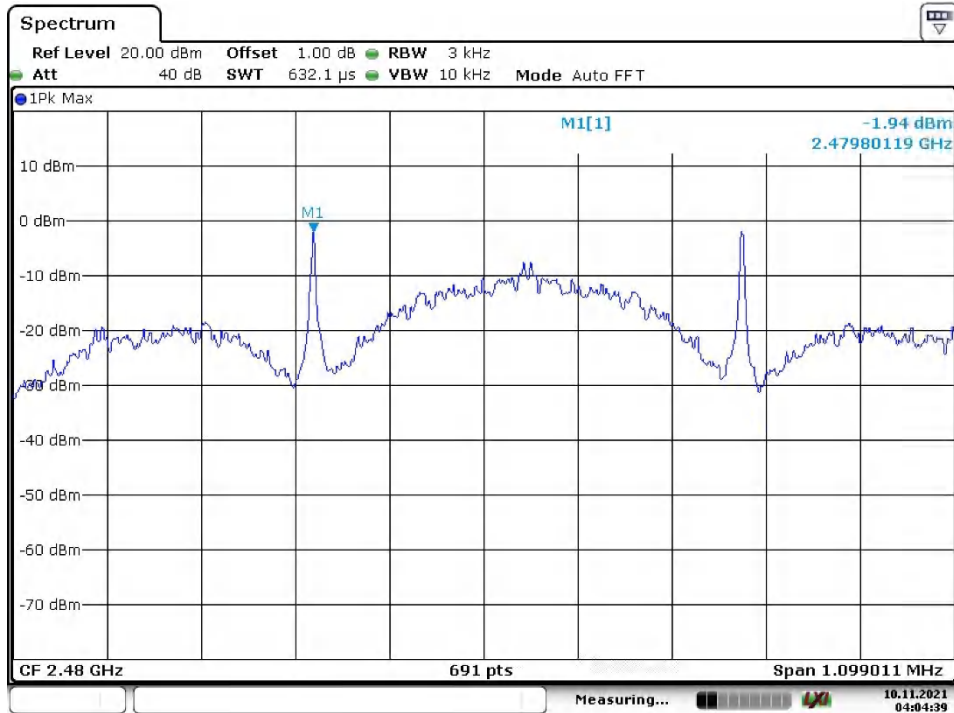

Date: 10.NOV.2021 04:04:39


BLE, 500Kbps

Low Channel

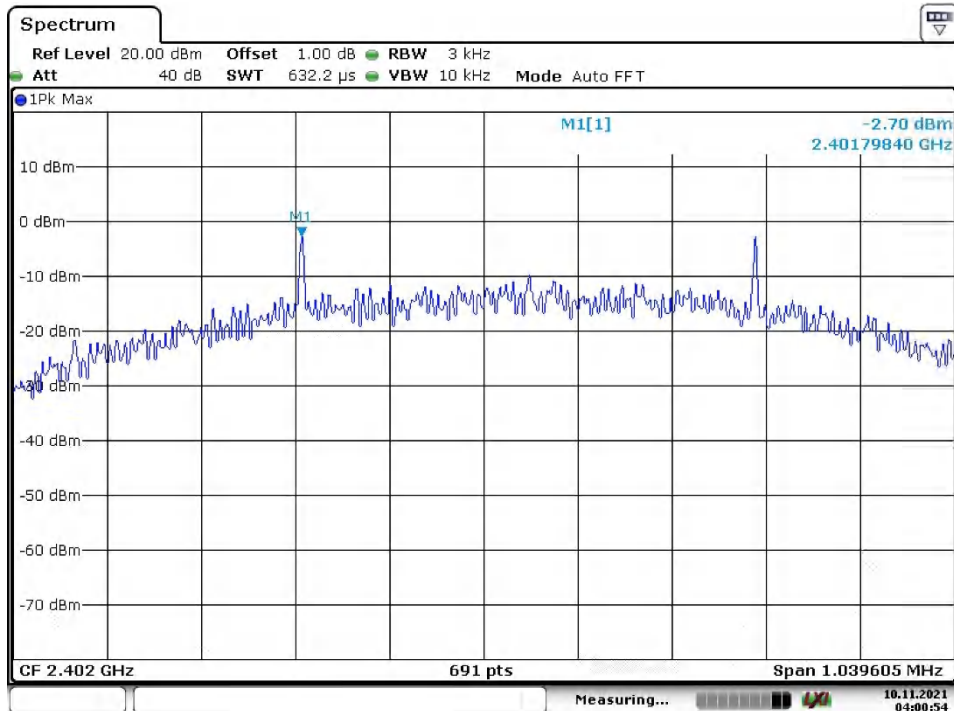


Date: 10.NOV.2021 04:00:54

Middle Channel

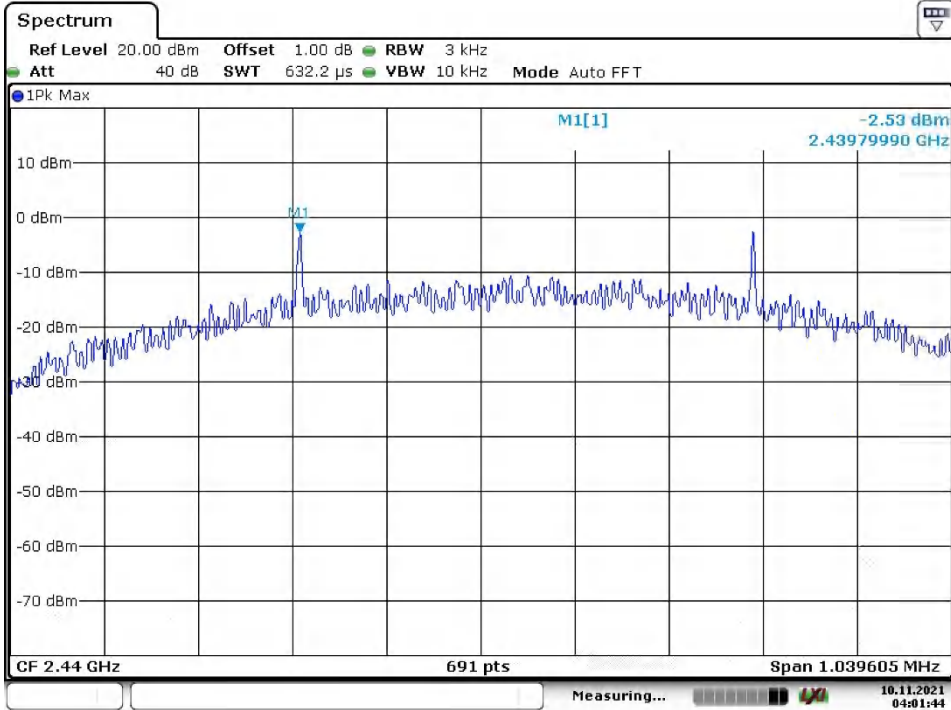

Date: 10.NOV.2021 04:01:44


High Channel

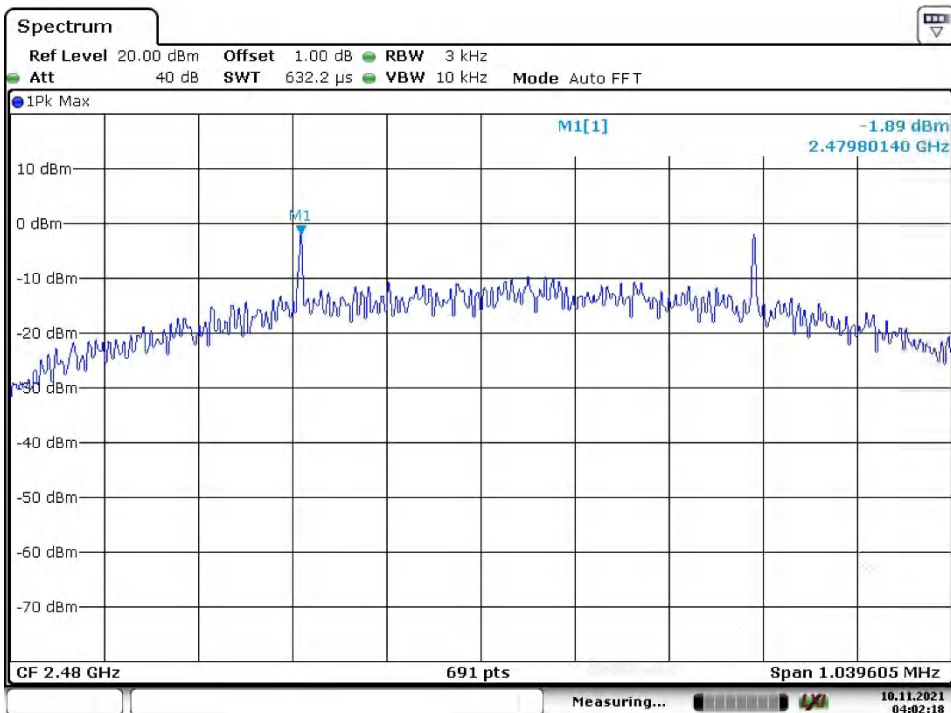

Date: 10.NOV.2021 04:02:18


BLE, 1Mbps

Low Channel

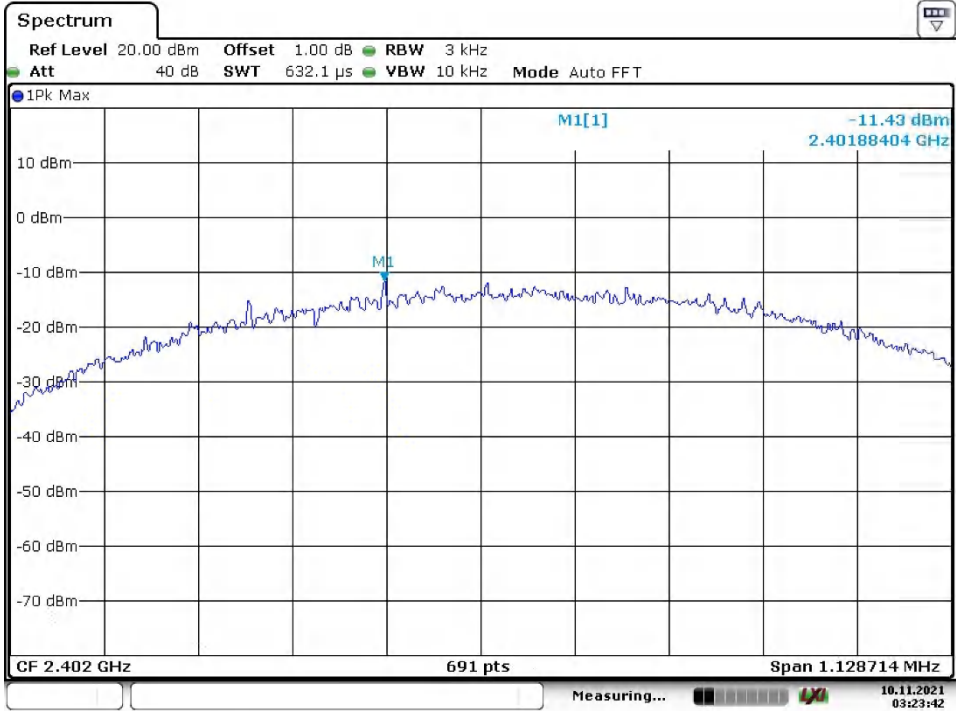


Date: 10.NOV.2021 03:23:42

Middle Channel

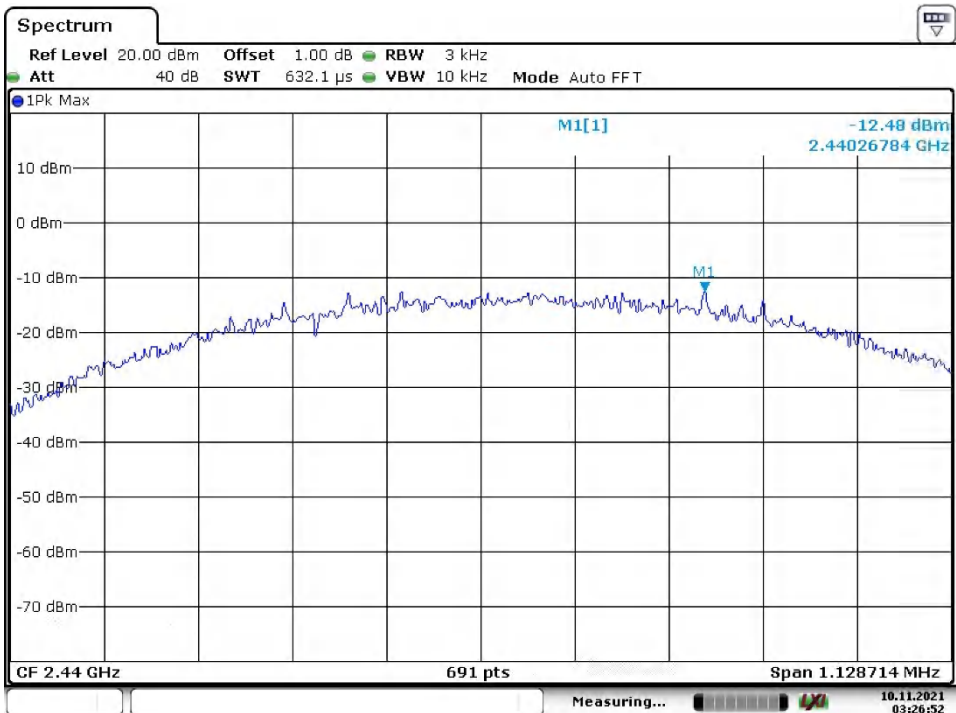

Date: 10.NOV.2021 03:26:51


High Channel

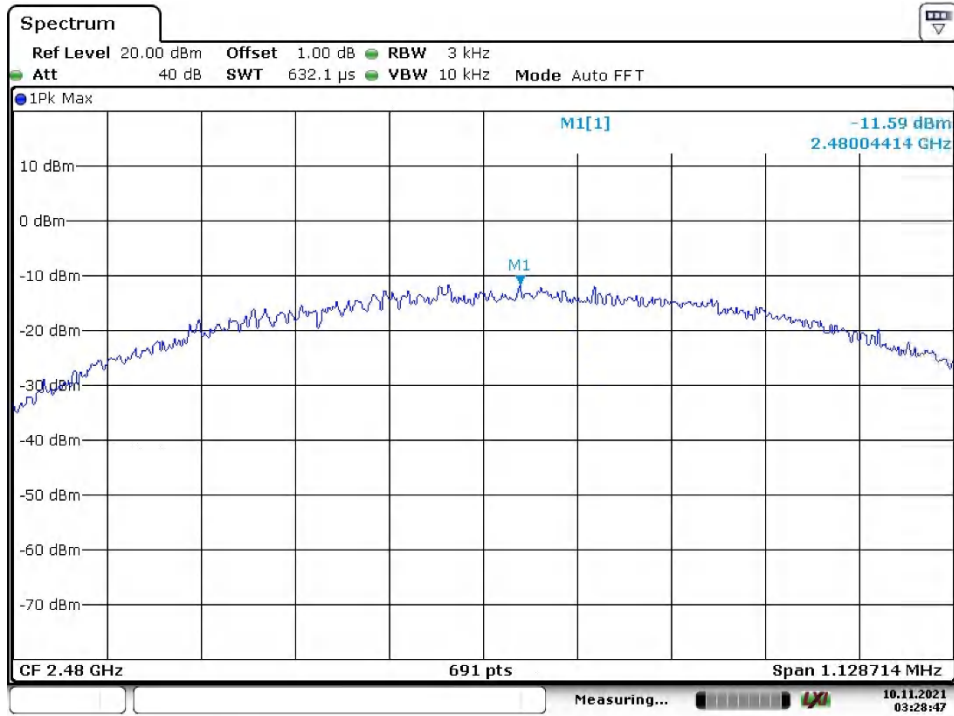

Date: 10.NOV.2021 03:28:47


BLE, 2Mbps

Low Channel

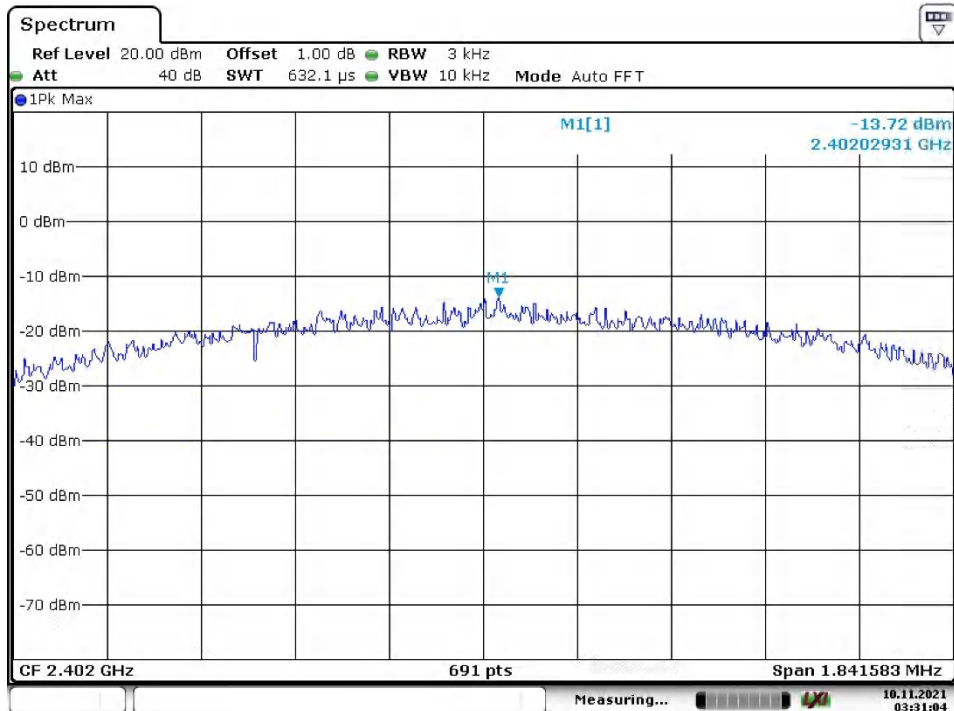


Date: 10.NOV.2021 03:31:04

Middle Channel

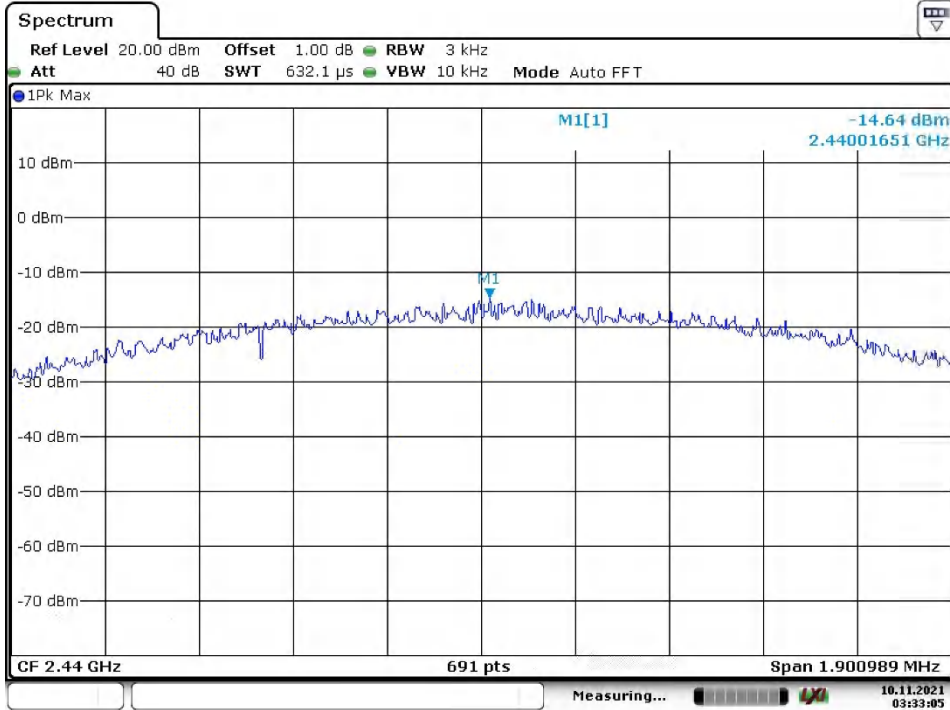

Date: 10.NOV.2021 03:33:05

High Channel

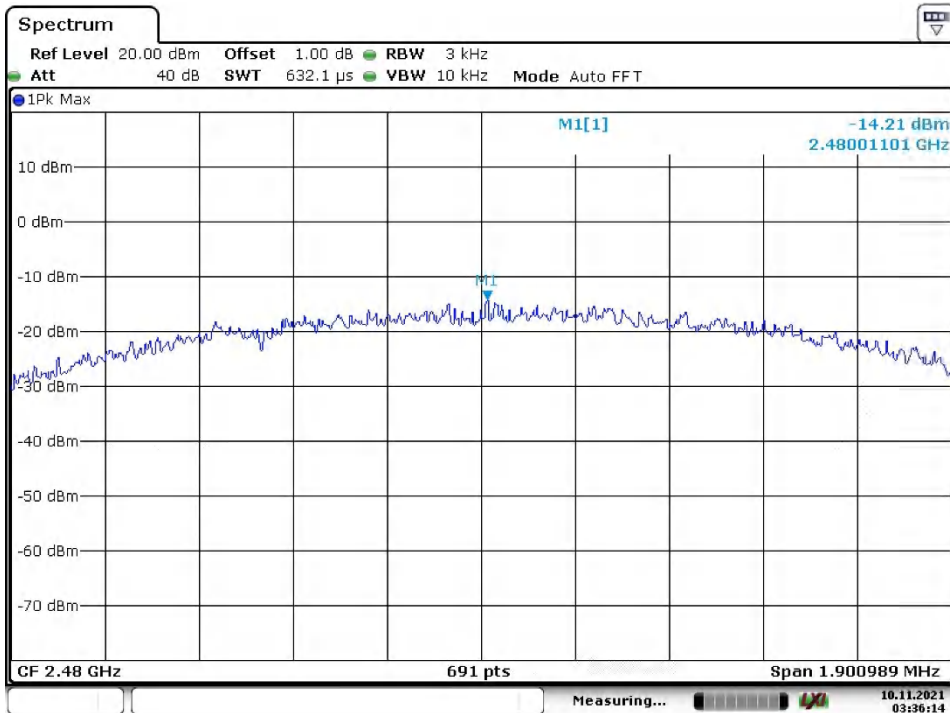

Date: 10.NOV.2021 03:36:14


Appendix B.2: 6dB Bandwidth

BLE, 125Kbps

Low Channel

RBW=100KHz, VBW=300KHz


6 dB Bandwidth

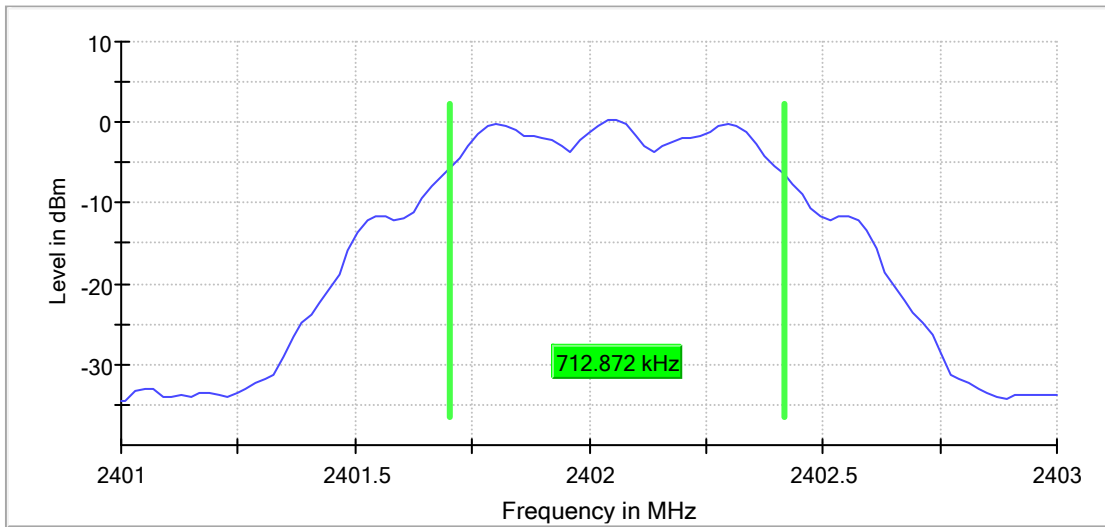

Middle Channel

RBW=100KHz, VBW=300KHz


6 dB Bandwidth

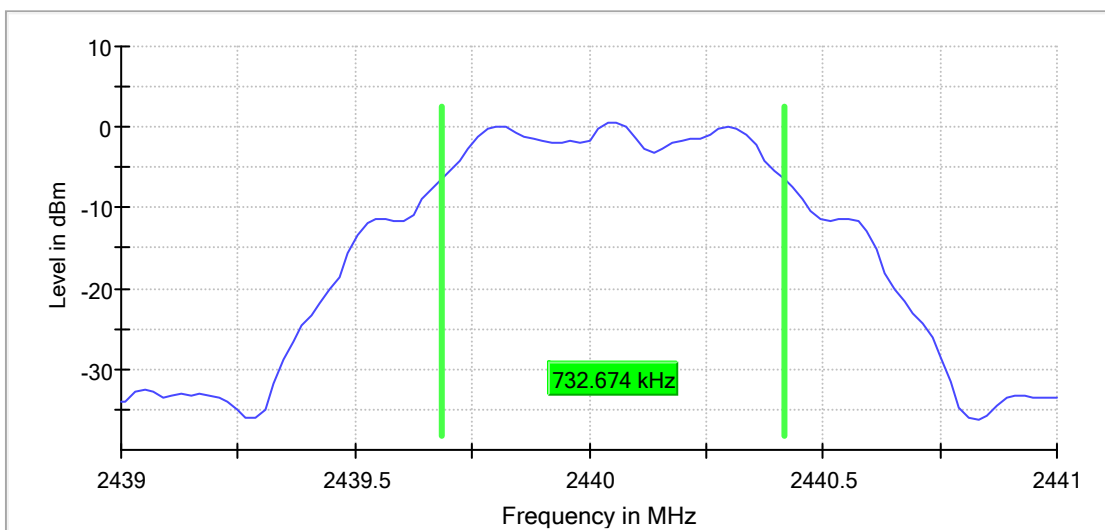

High Channel

RBW=100KHz, VBW=300KHz

6 dB Bandwidth

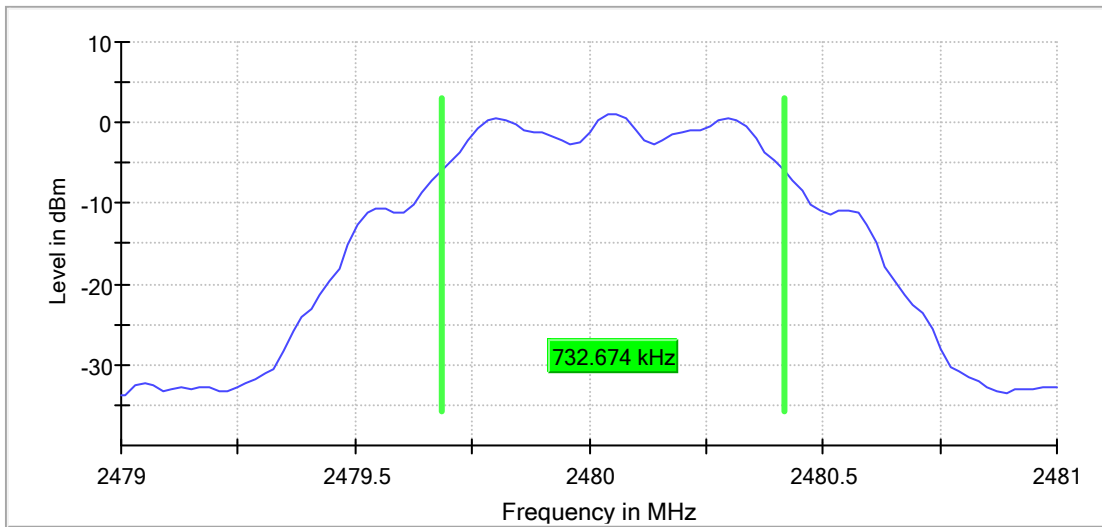


BLE, 500Kbps

Low Channel

RBW=100KHz, VBW=300KHz


6 dB Bandwidth

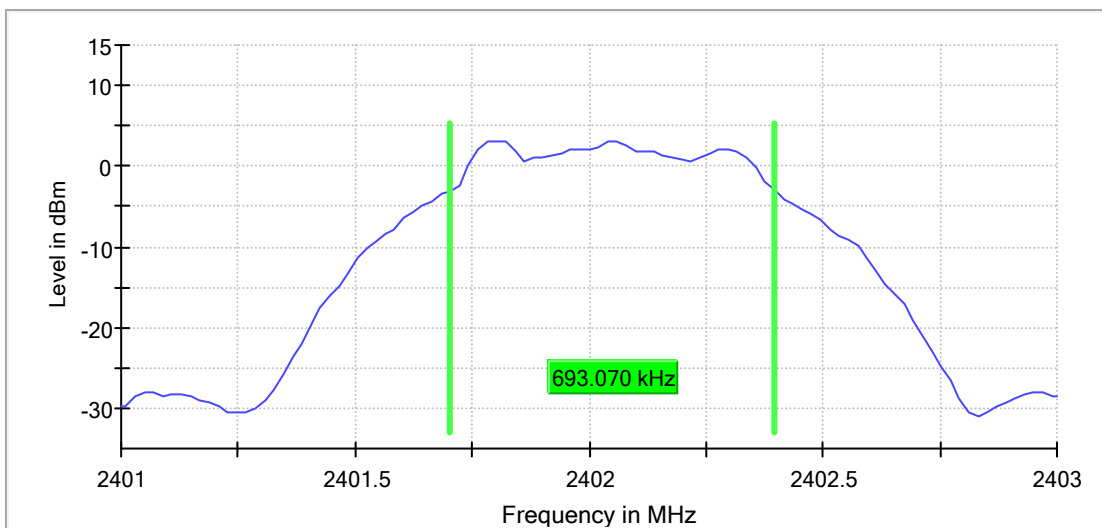

Middle Channel

RBW=100KHz, VBW=300KHz


6 dB Bandwidth

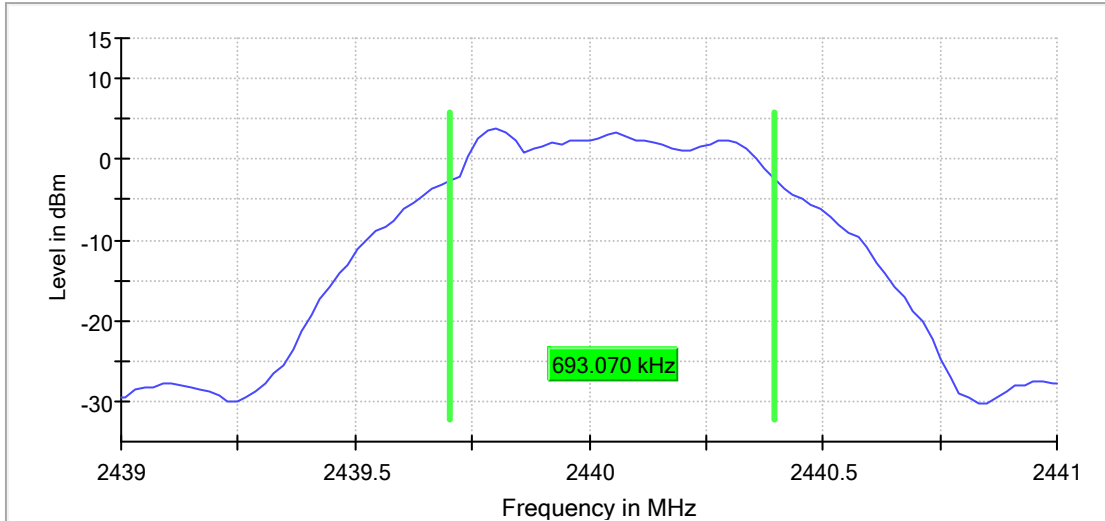

High Channel

RBW=100KHz, VBW=300KHz

6 dB Bandwidth

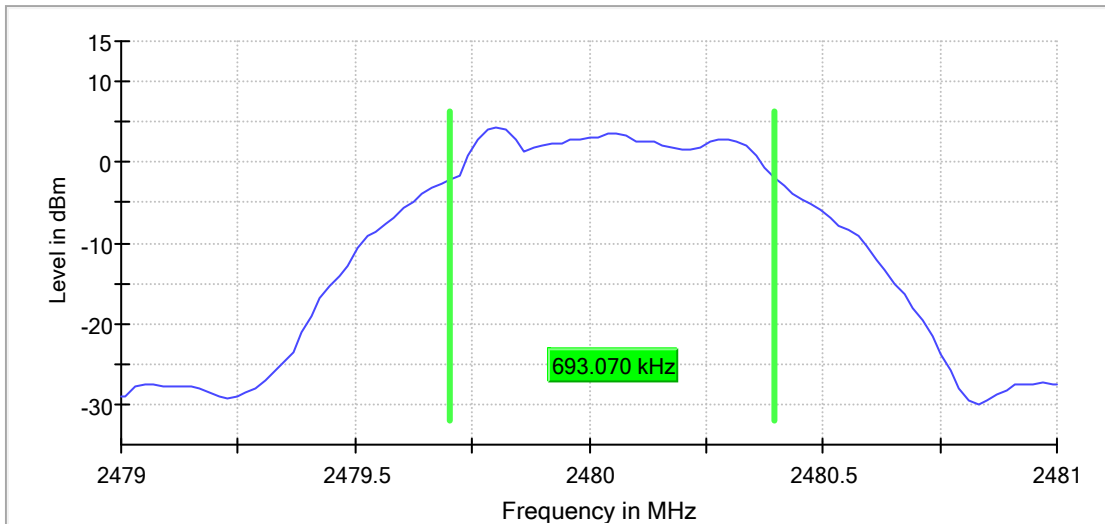


BLE, 1Mbps

Low Channel

RBW=100KHz, VBW=300KHz


6 dB Bandwidth

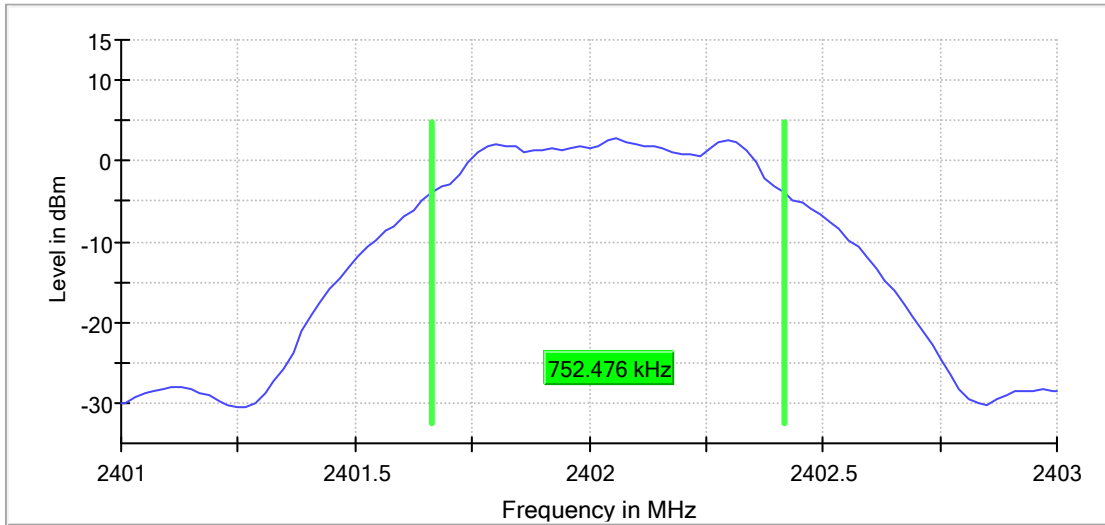

Middle Channel

RBW=100KHz, VBW=300KHz


6 dB Bandwidth

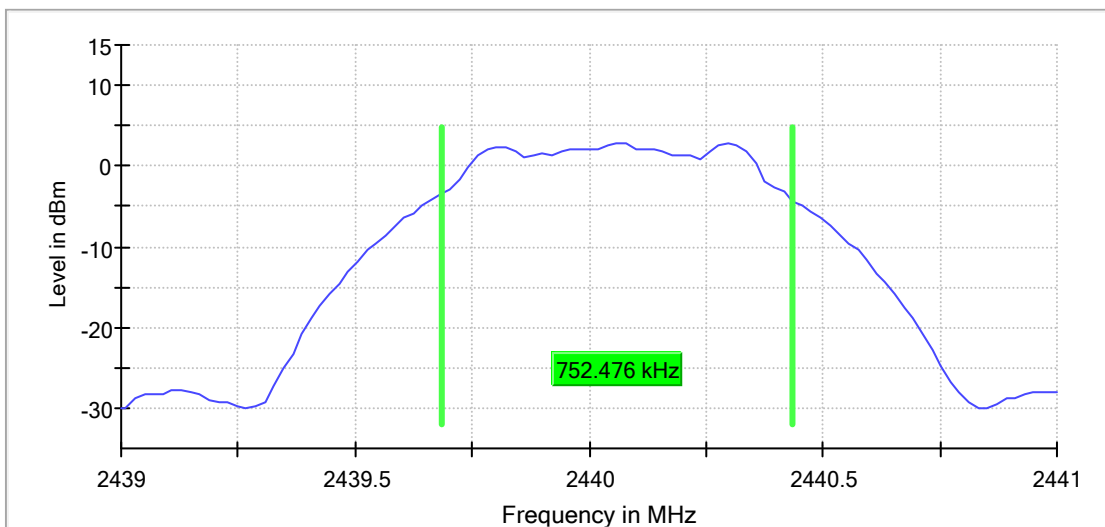

High Channel

RBW=100KHz, VBW=300KHz

6 dB Bandwidth

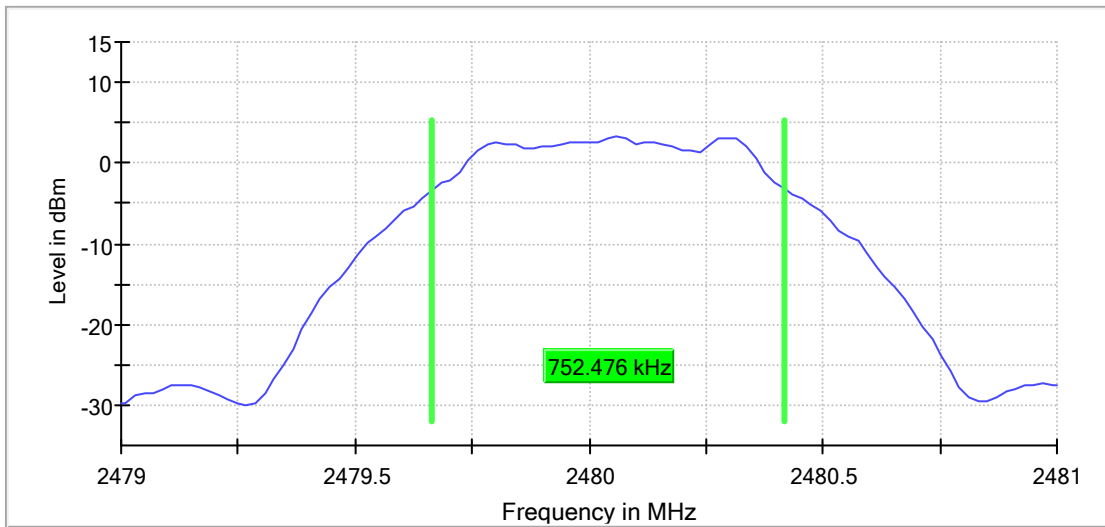


BLE, 2Mbps

Low Channel

RBW=100KHz, VBW=300KHz


6 dB Bandwidth

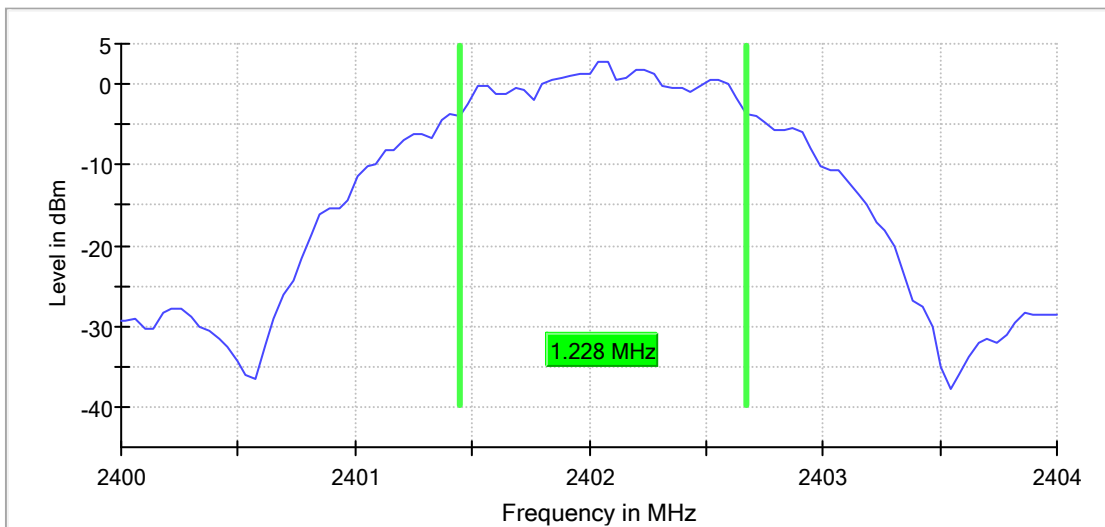

Middle Channel

RBW=100KHz, VBW=300KHz


6 dB Bandwidth

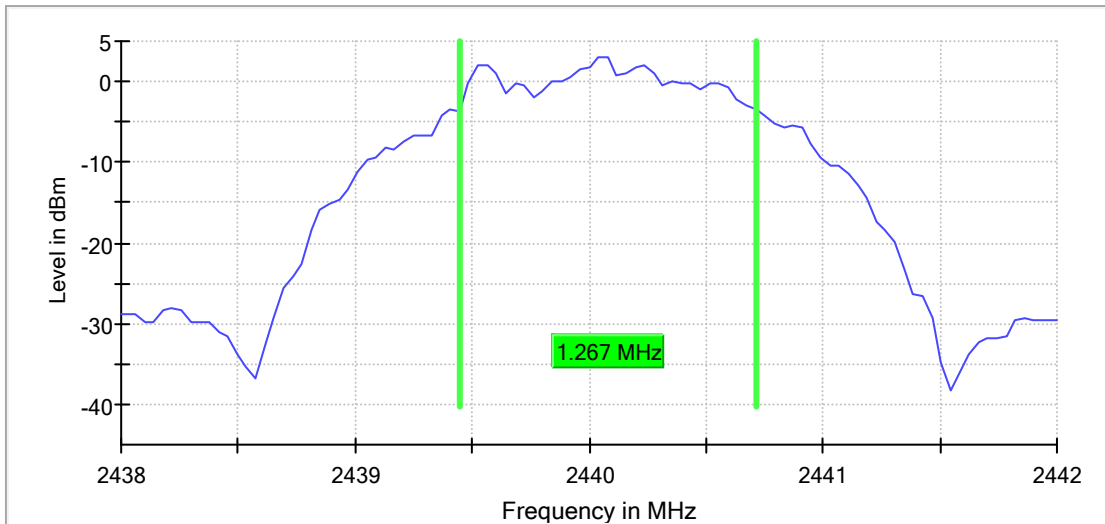

High Channel

RBW=100KHz, VBW=300KHz

6 dB Bandwidth

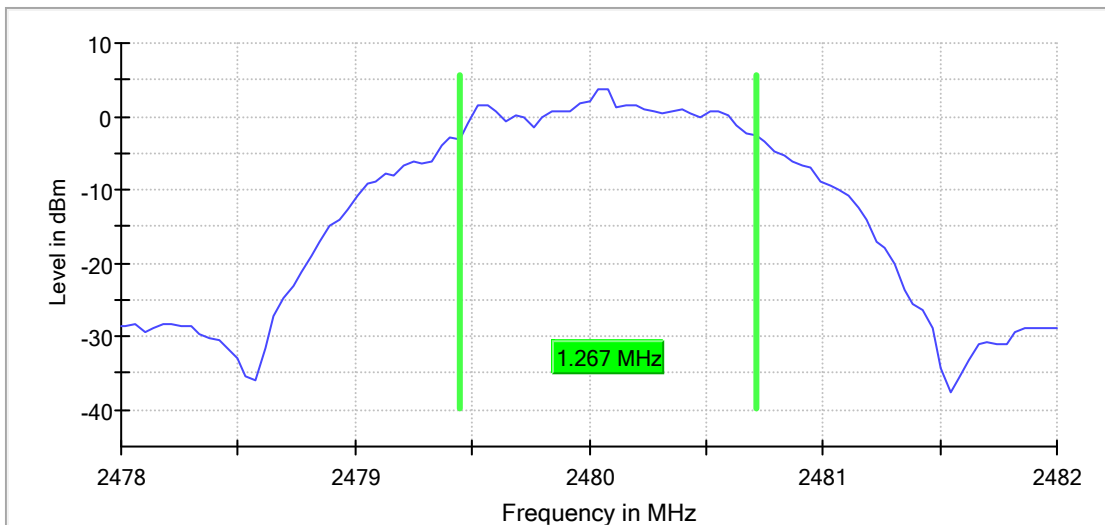


Appendix B.3: 99% Bandwidth

BLE, 125Kbps

Low Channel

RBW=30KHz, VBW=100KHz


99 % Bandwidth

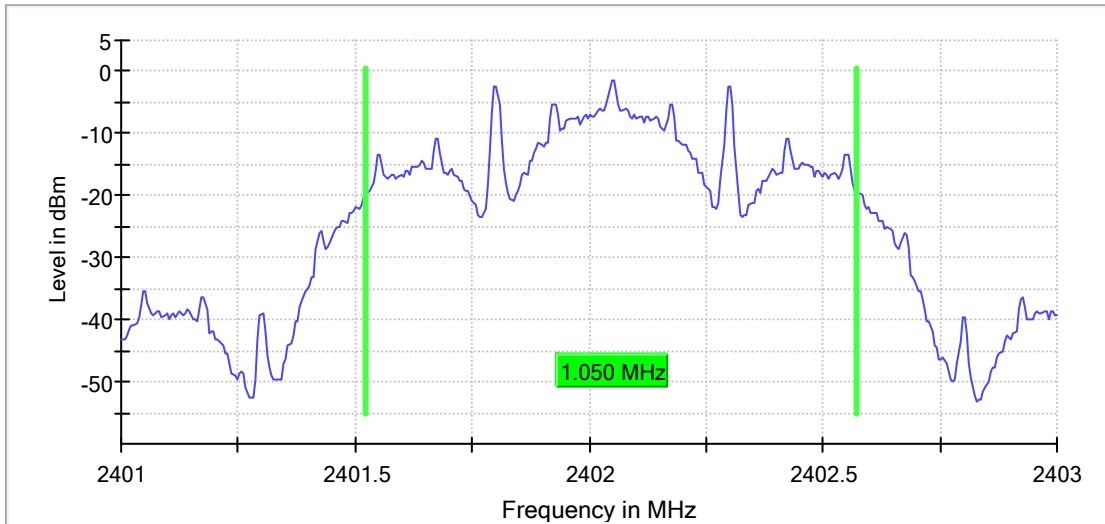

Middle Channel

RBW=30KHz, VBW=100KHz


99 % Bandwidth

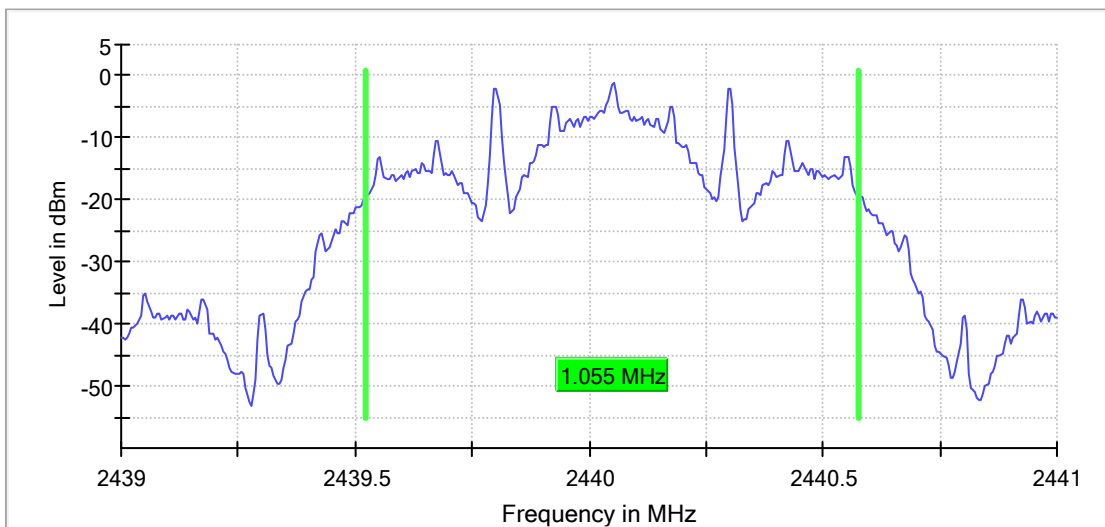

High Channel

RBW=30KHz, VBW=100KHz

99 % Bandwidth

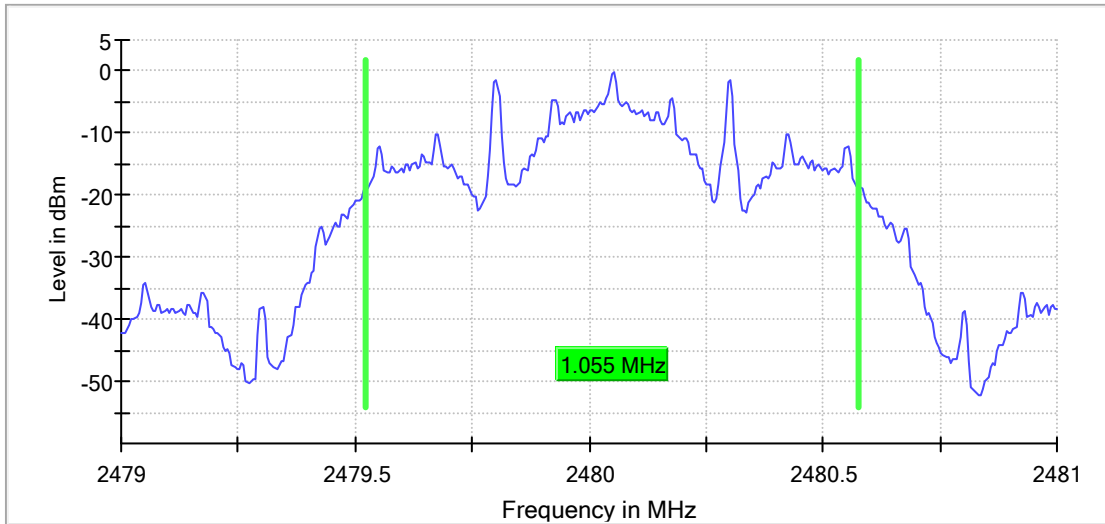


BLE, 500Kbps

Low Channel

RBW=30KHz, VBW=100KHz


99 % Bandwidth

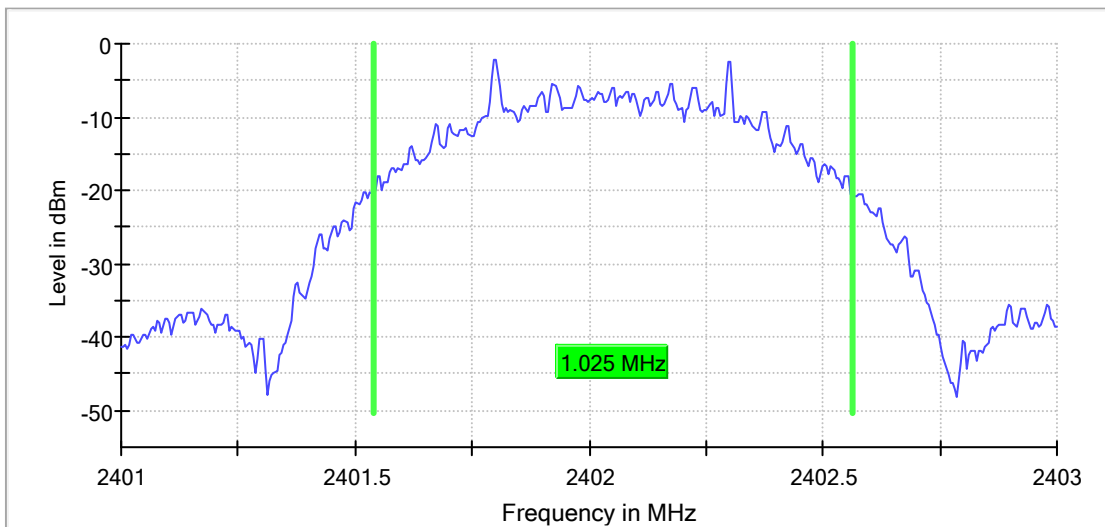

Middle Channel

RBW=30KHz, VBW=100KHz


99 % Bandwidth

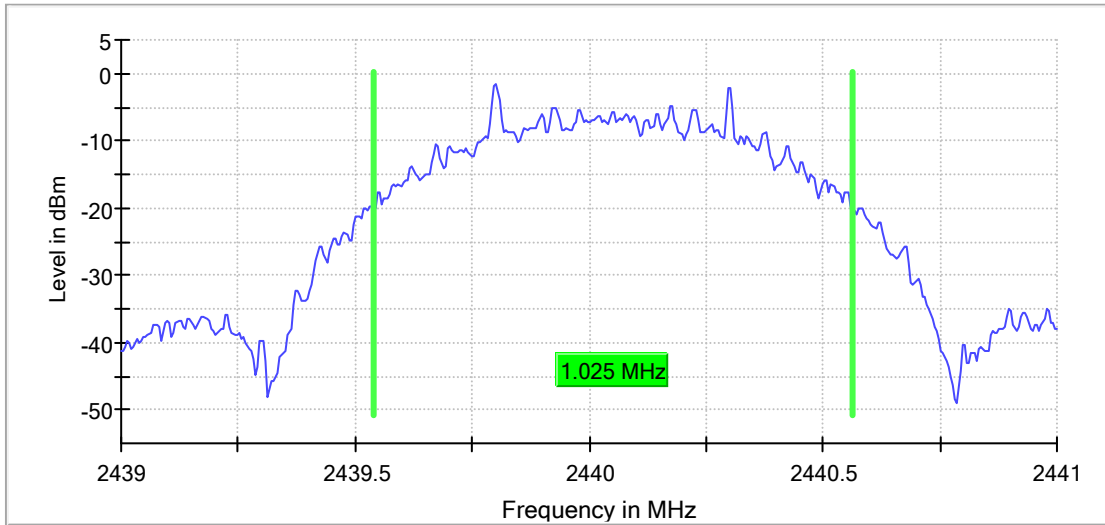

High Channel

RBW=30KHz, VBW=100KHz

99 % Bandwidth

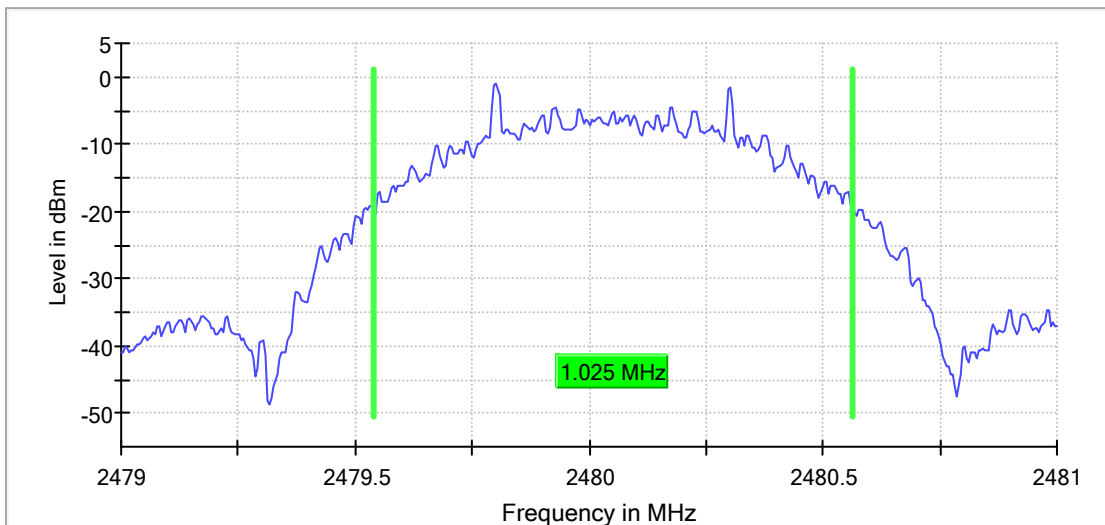


BLE, 1Mbps

Low Channel

RBW=30KHz, VBW=100KHz


99 % Bandwidth

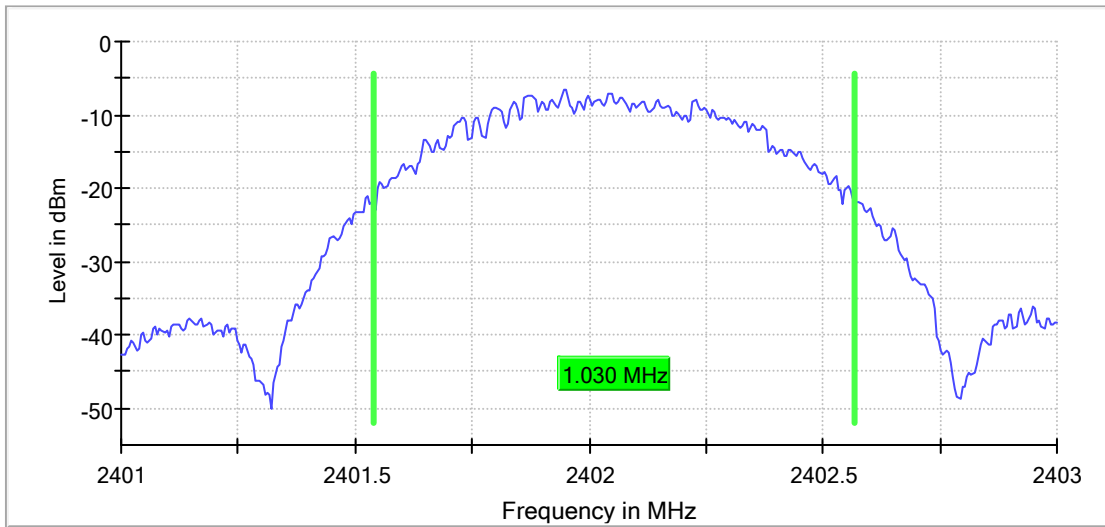

Middle Channel

RBW=30KHz, VBW=100KHz


99 % Bandwidth

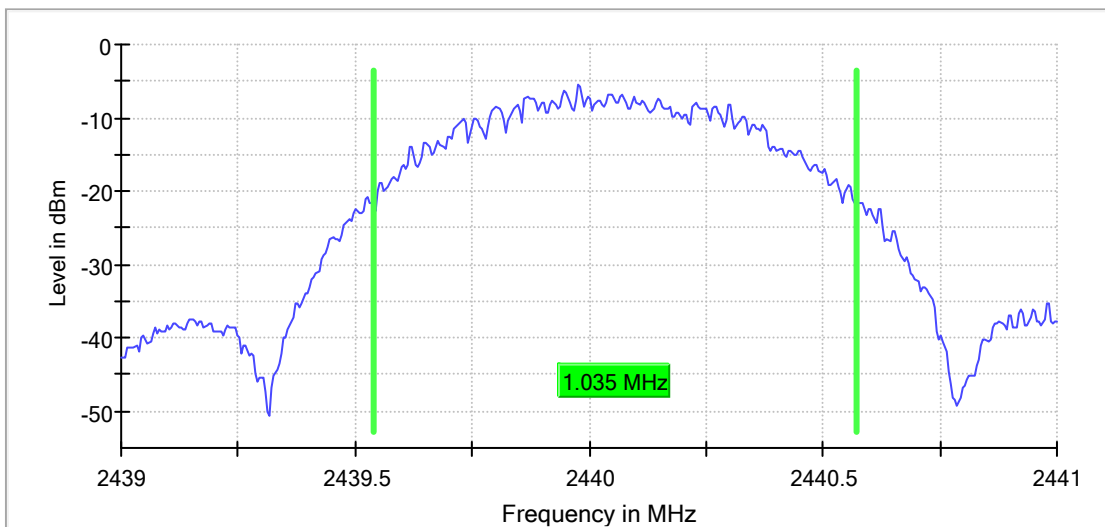

High Channel

RBW=30KHz, VBW=100KHz

99 % Bandwidth

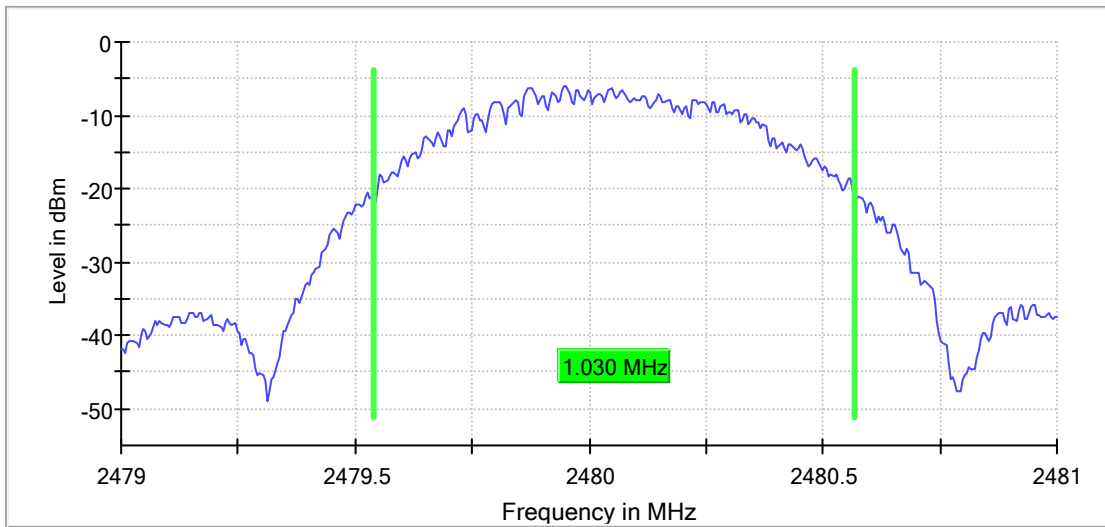


BLE, 2Mbps

Low Channel

RBW=30KHz, VBW=100KHz


99 % Bandwidth

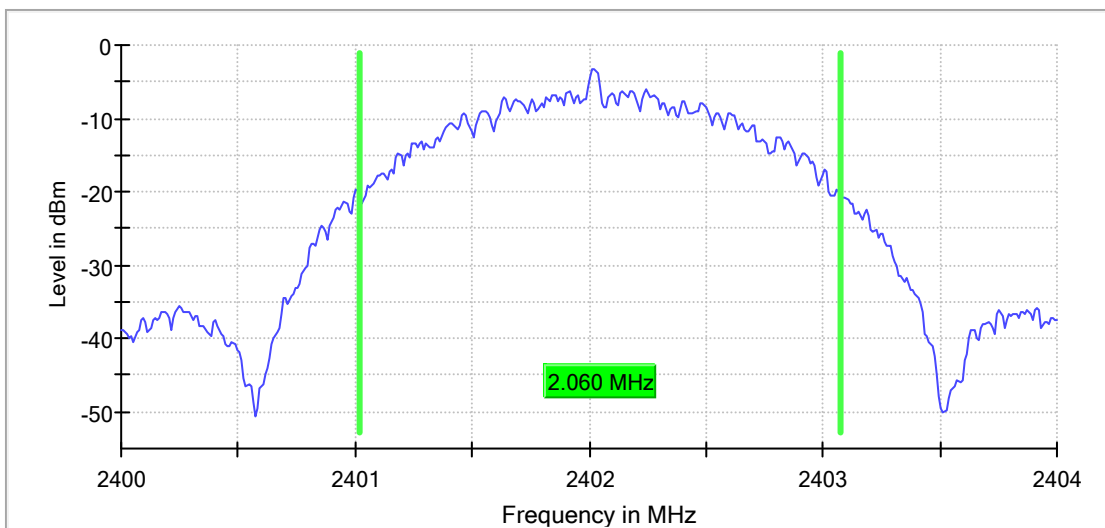

Middle Channel

RBW=30KHz, VBW=100KHz


99 % Bandwidth

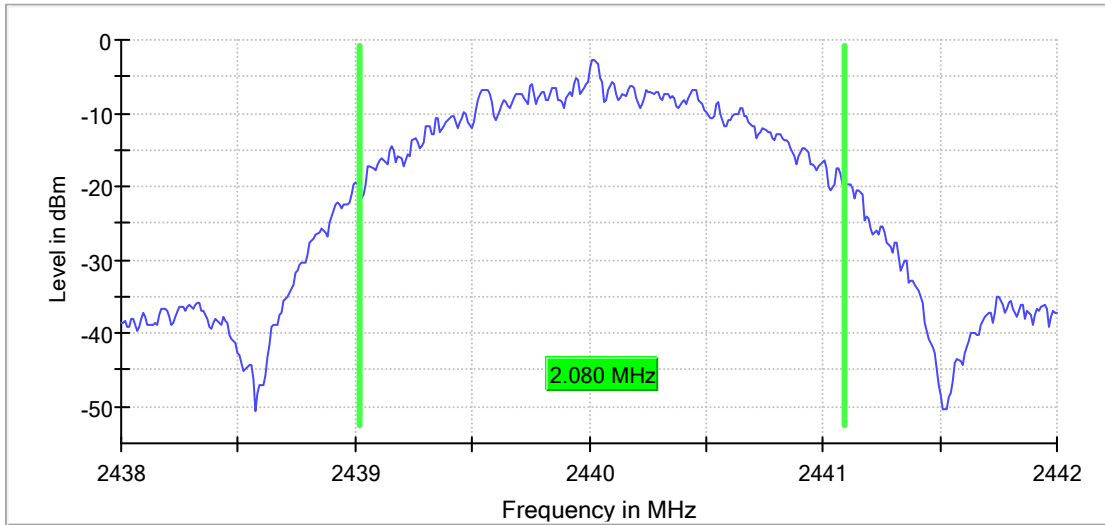

High Channel

RBW=30KHz, VBW=100KHz

99 % Bandwidth

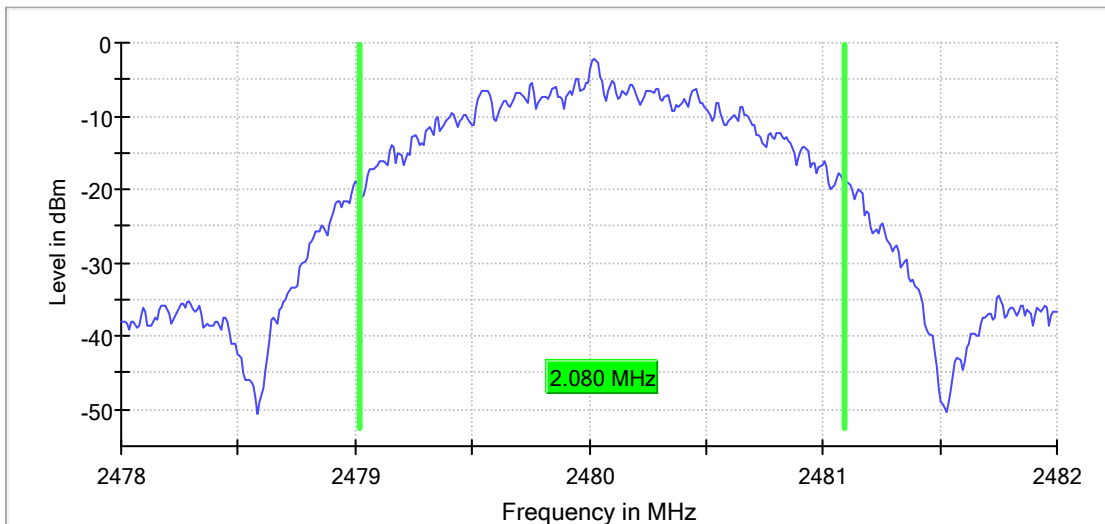


Appendix B.4: Conducted Spurious Emissions Measured in 100 kHz Bandwidth

BLE, 1Mbps

Low Channel



Date: 10.NOV.2021 03:20:27

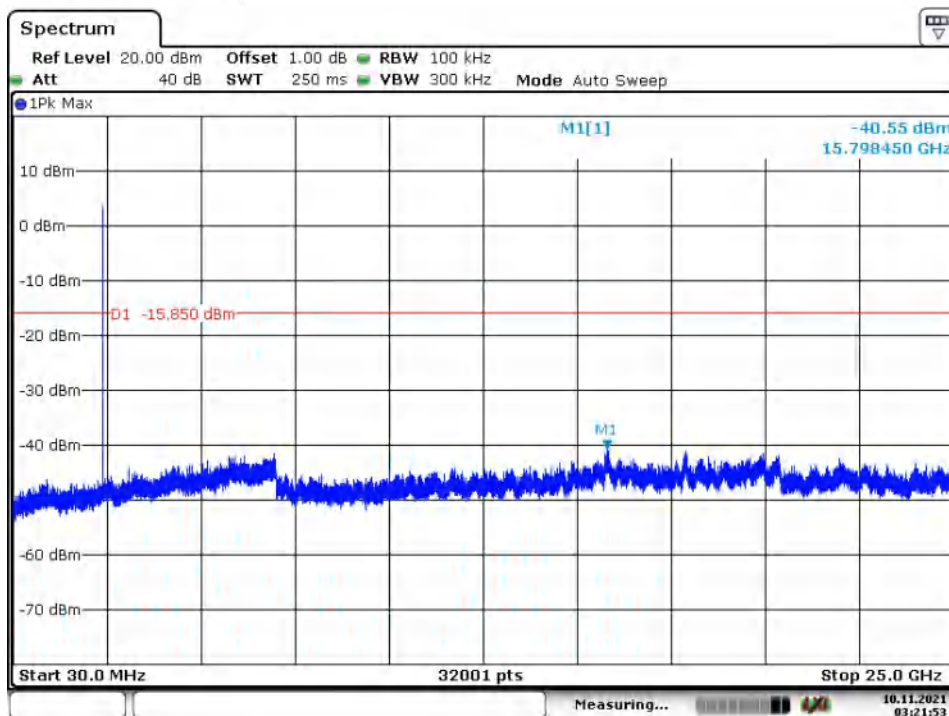


Date: 10.NOV.2021 03:21:53

Middle Channel




Date: 10.NOV.2021 03:24:45

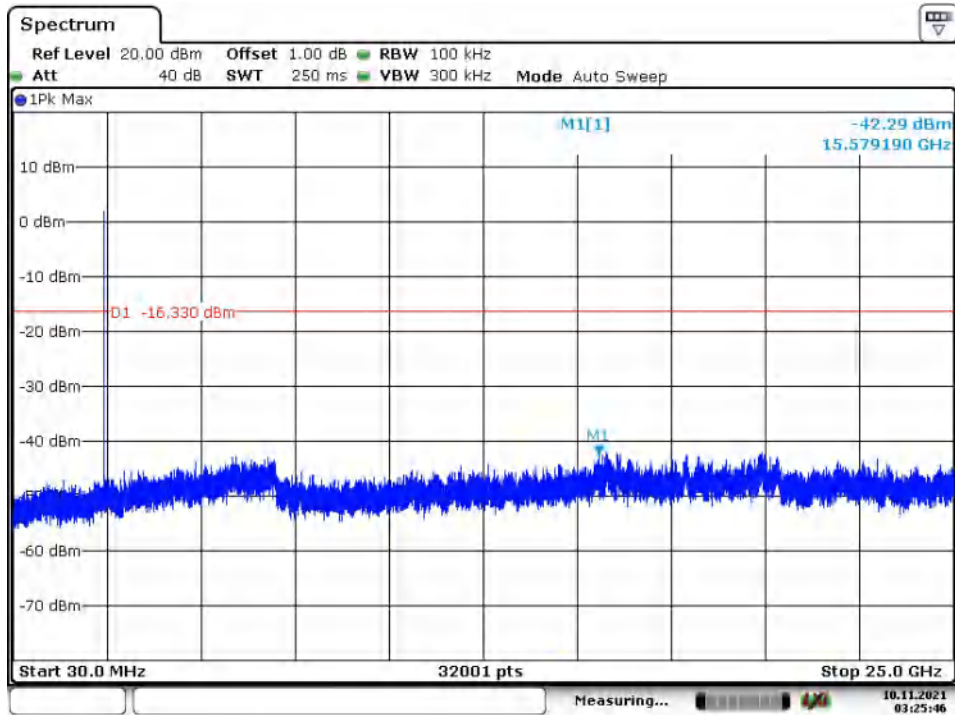


Date: 10.NOV.2021 03:25:46

High Channel

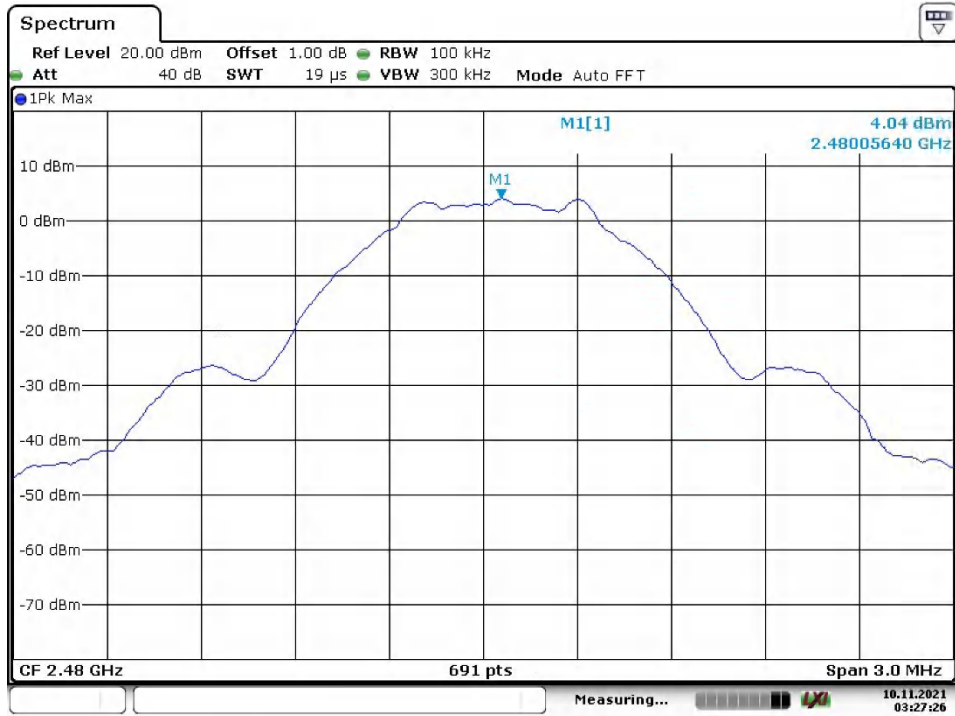


Date: 10.NOV.2021 03:27:25

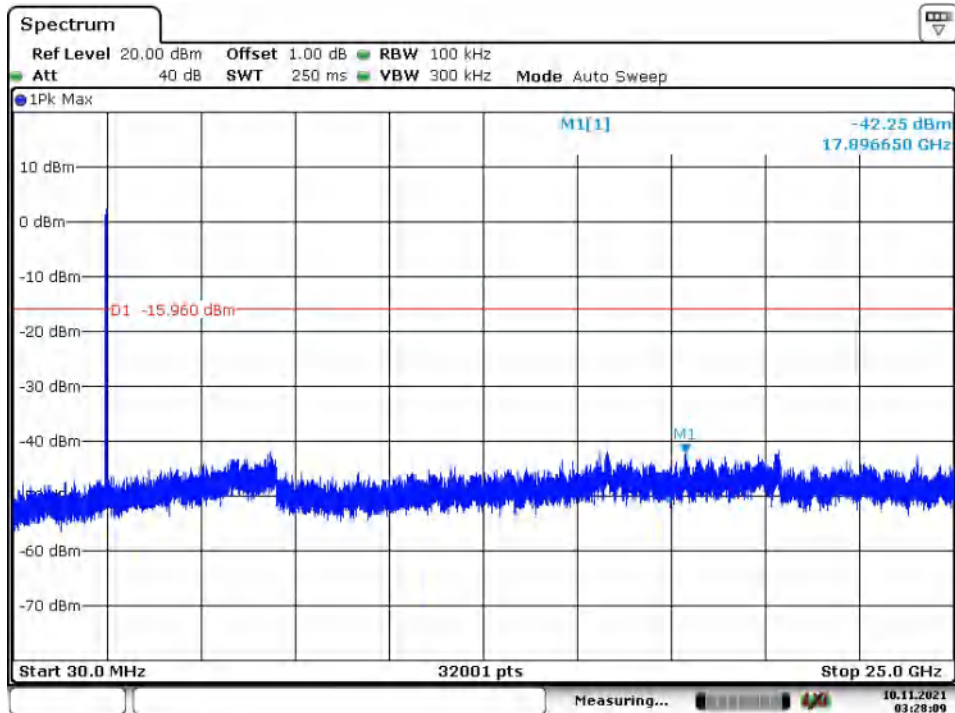


Date: 10.NOV.2021 03:28:09

Low Channel_Band Edge

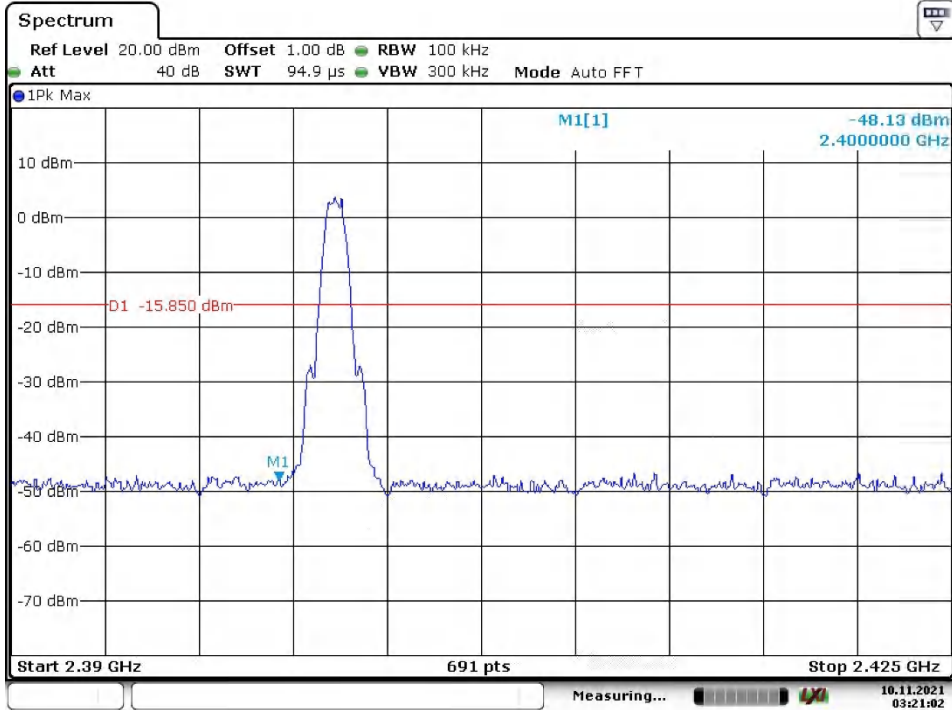

Date: 10.NOV.2021 03:21:02


High Channel_Band Edge

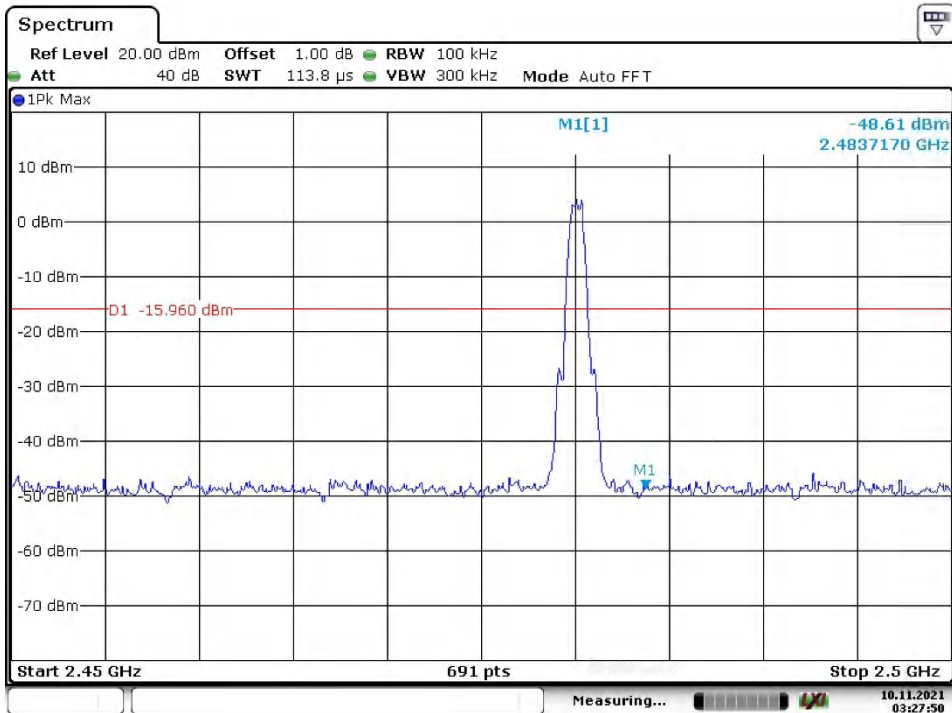


Date: 10.NOV.2021 03:27:50

BLE, 2Mbps

Low Channel

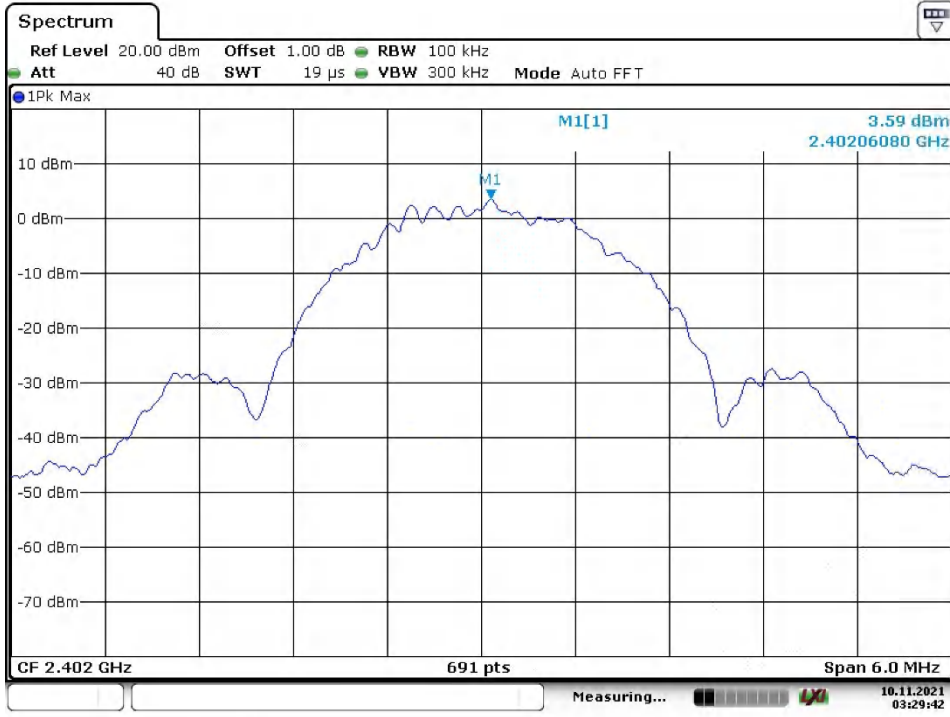


Date: 10.NOV.2021 03:29:42

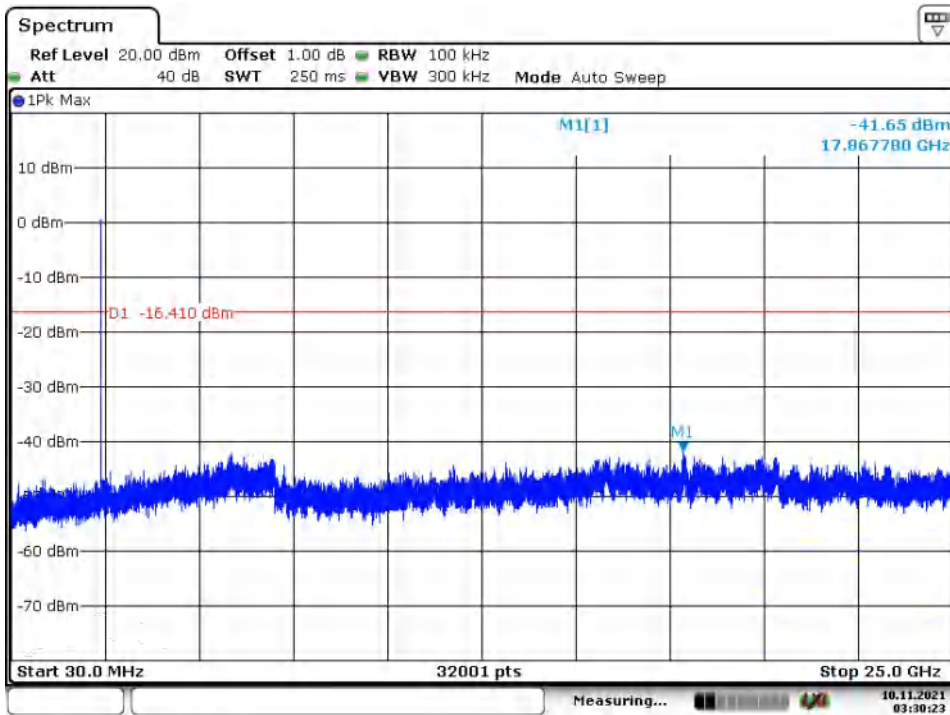


Date: 10.NOV.2021 03:30:23

Middle Channel

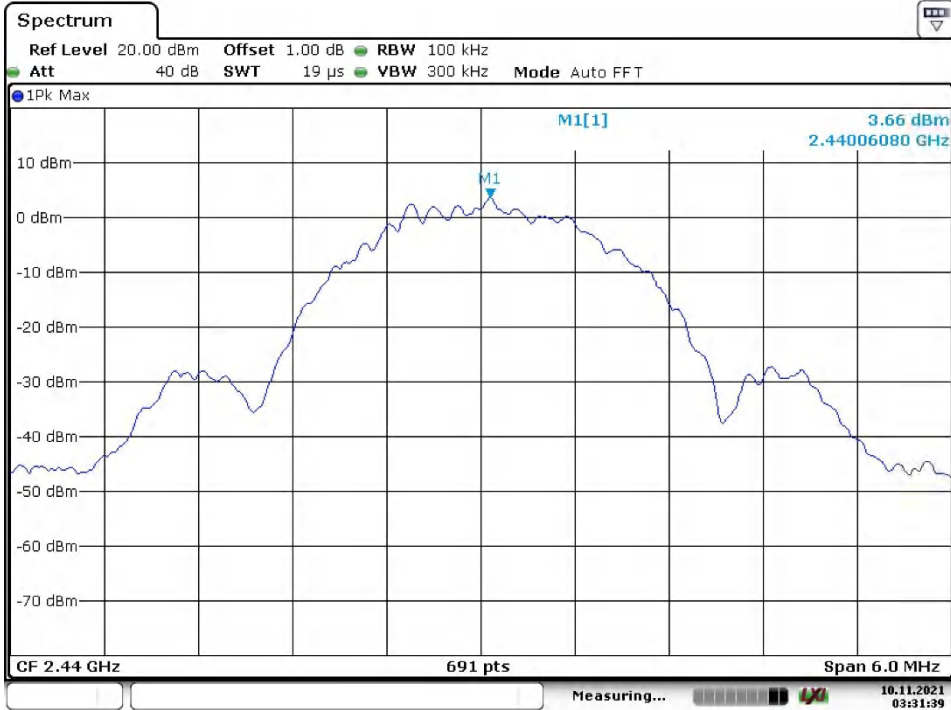


Date: 10.NOV.2021 03:31:39

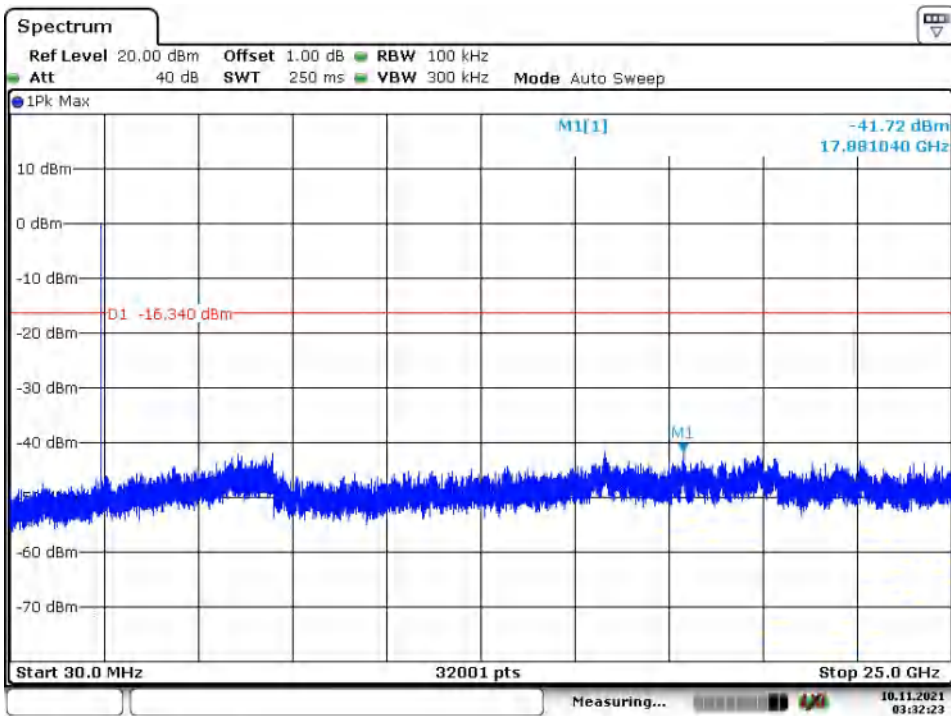


Date: 10.NOV.2021 03:32:23

High Channel

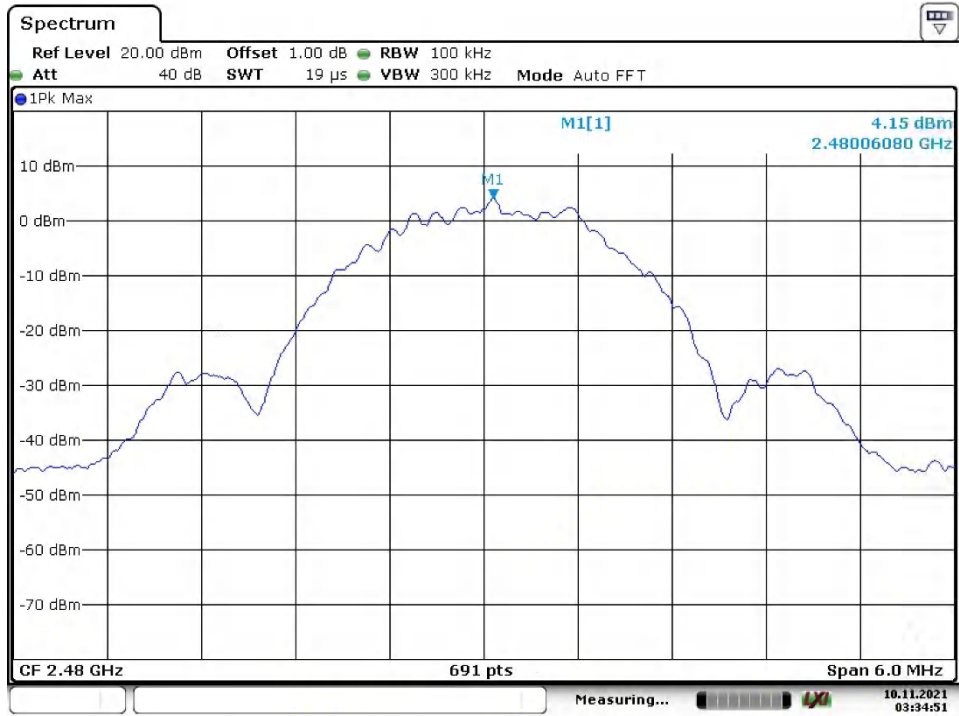


Date: 10.NOV.2021 03:34:51

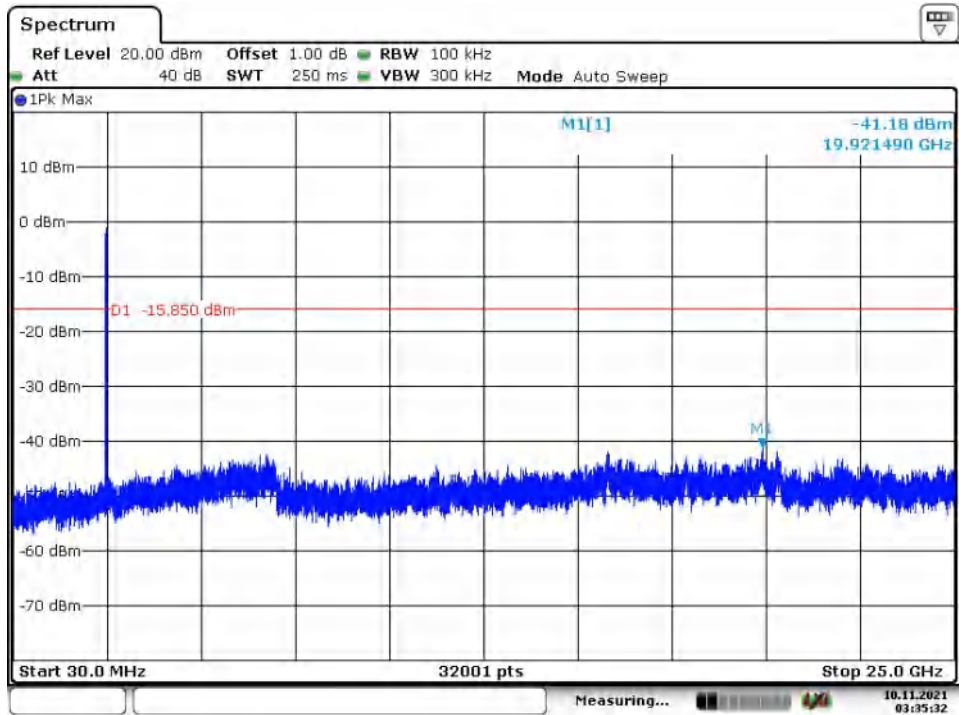


Date: 10.NOV.2021 03:35:32

Low Channel_Band Edge

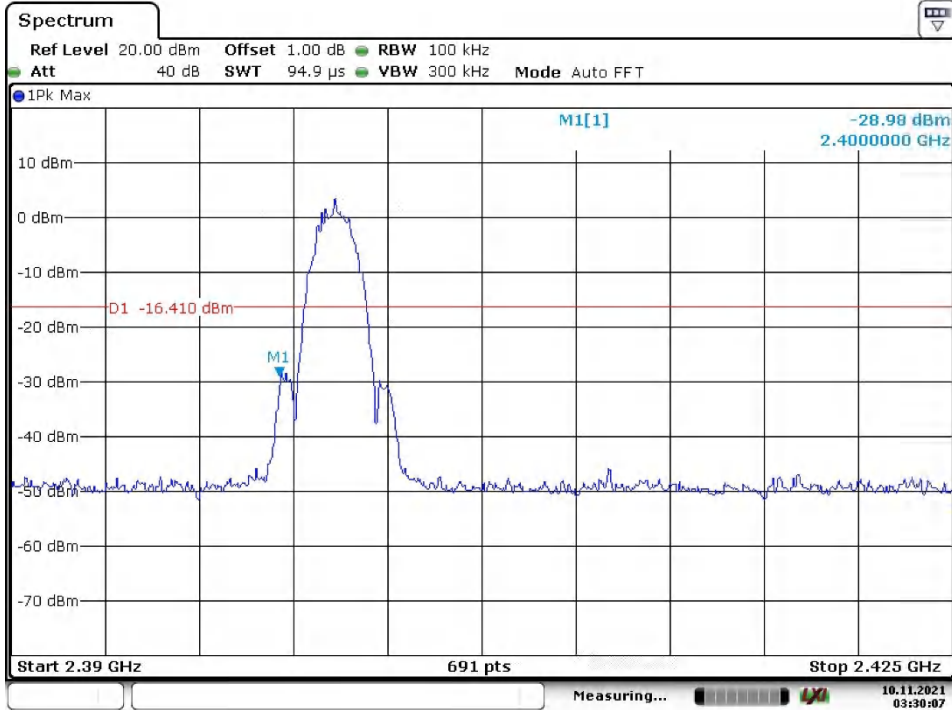

Date: 10.NOV.2021 03:30:07

High Channel_Band Edge

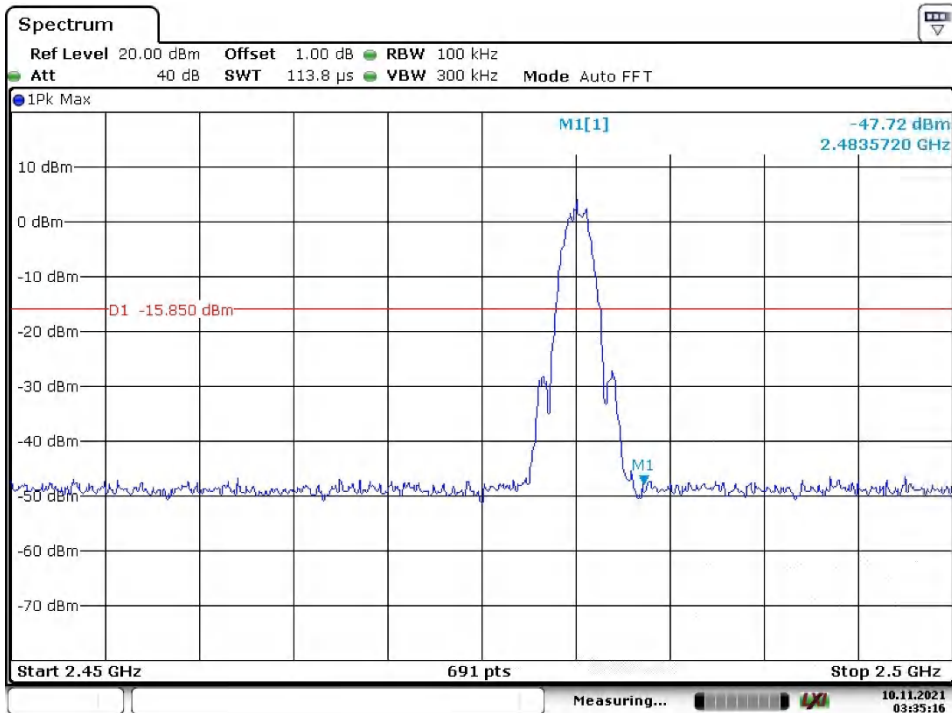

Date: 10.NOV.2021 03:35:16

Appendix B.5: Test Results of Radiated Spurious Emissions


Note 1: Testing was carried out within frequency range 9 kHz to the tenth harmonics. The measurement results below 30MHz and above 18GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

BLE, 1Mbps

Antenna SA06LWEG01RA, 3.4dBi

EUT Information

EUT Name:	Bluetooth Module
Model:	RAK13400
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

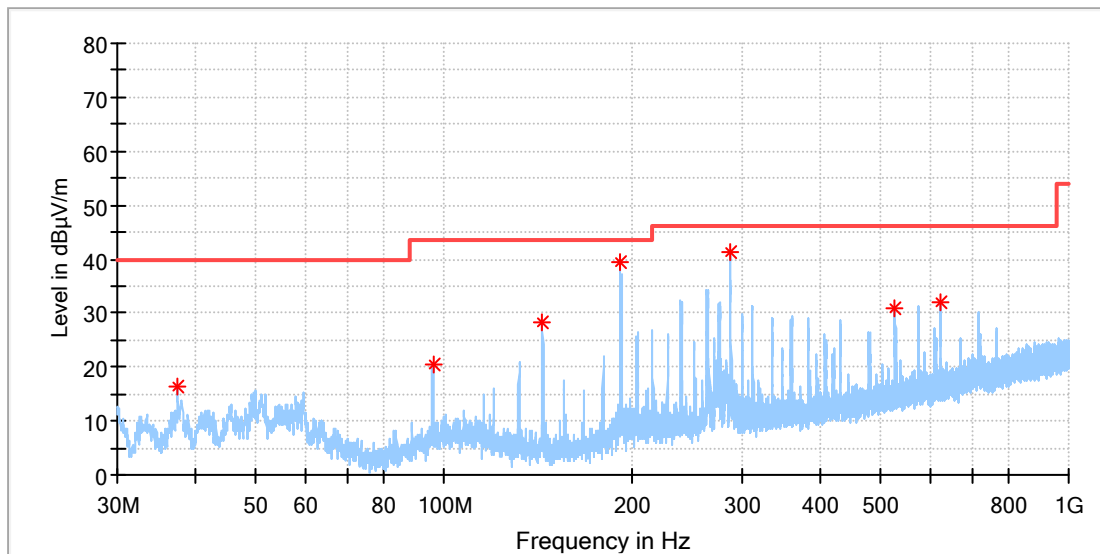


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.498846	16.24	40.00	23.76	100.0	H	233.0	-21.2
95.960000	20.39	43.50	23.11	100.0	H	136.0	-19.9
143.900385	28.13	43.50	15.37	100.0	H	136.0	-22.6
191.840769	39.37	43.50	4.13	100.0	H	359.0	-19.7
287.870769	41.41	46.00	4.59	100.0	H	304.0	-16.9
527.796539	30.91	46.00	15.09	100.0	H	321.0	-11.7
623.901154	31.97	46.00	14.03	100.0	H	304.0	-9.8

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

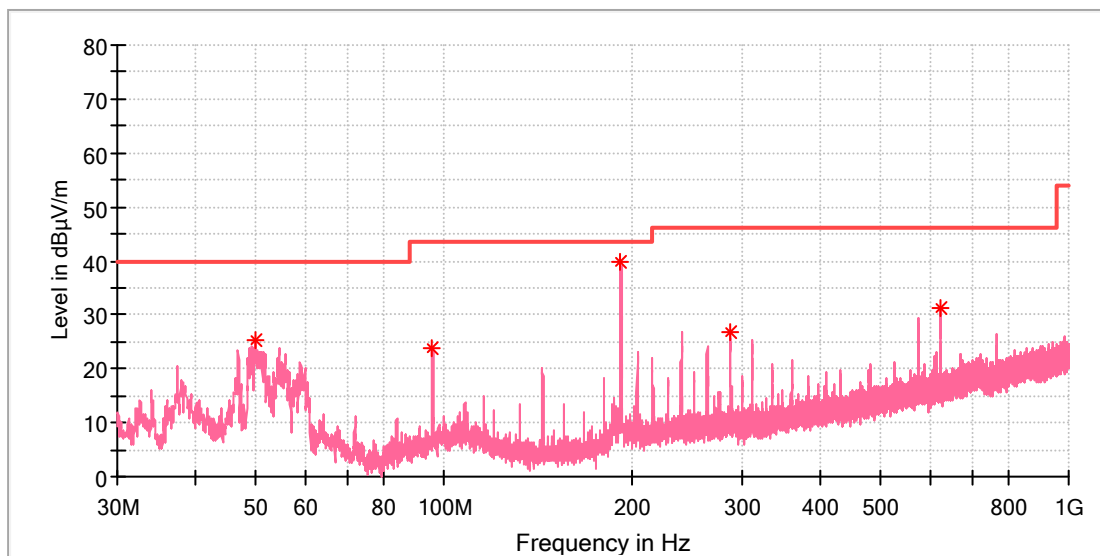


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.996923	25.46	40.00	14.54	100.0	V	218.0	-18.6
95.922692	23.65	43.50	19.85	100.0	V	161.0	-19.9
191.990000	39.71	43.50	3.79	100.0	V	227.0	-19.7
287.684231	26.62	46.00	19.38	100.0	V	0.0	-16.9
624.087692	31.43	46.00	14.57	100.0	V	211.0	-9.8

EUT Information

EUT Name: Bluetooth module
 Model: RAK13400
 Test Mode: BLE 1M_Low channel
 Order No/Sample No: 168376868/A003277567-005
 Test Voltage:: DC 5V From USB
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

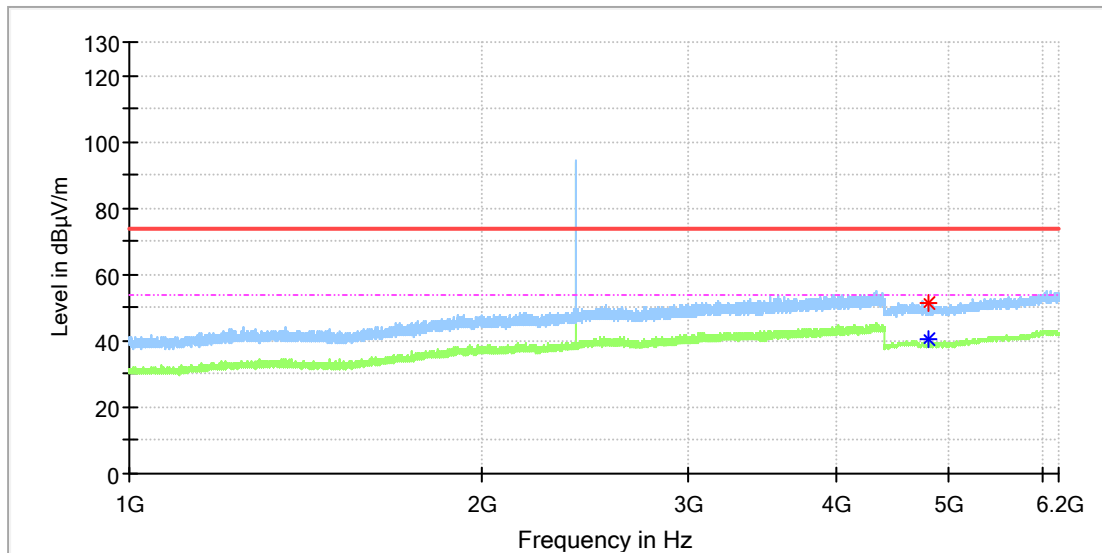


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.500000	51.31	---	74.00	22.69	100.0	H	111.0	11.8
4804.000000	---	40.34	54.00	13.66	100.0	H	223.0	11.8

EUT Information

EUT Name: Bluetooth module
 Model: RAK13400
 Test Mode: BLE 1M_Low channel
 Order No/Sample No: 168376868/A003277567-005
 Test Voltage:: DC 5V From USB
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

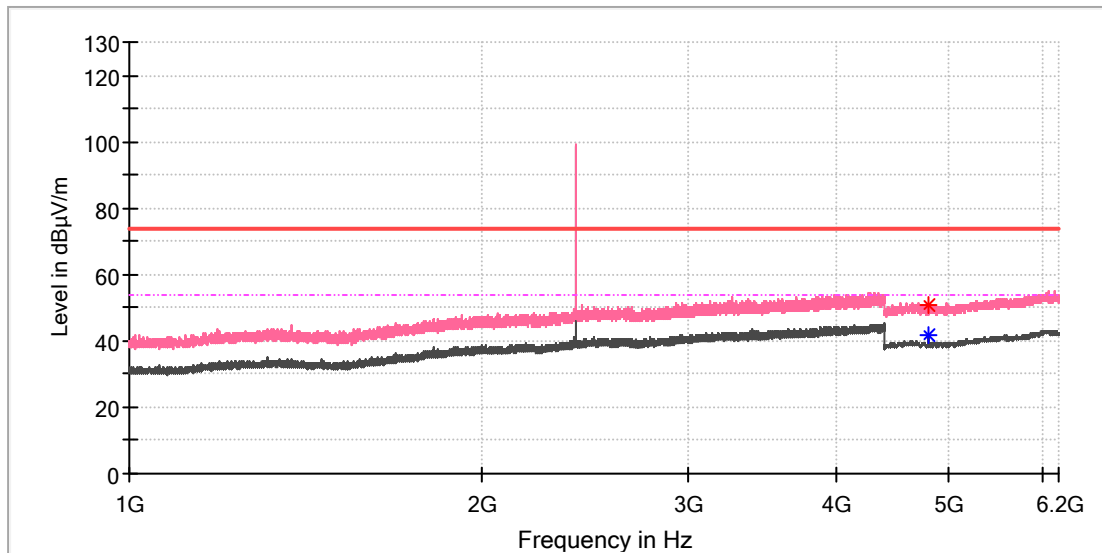


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.500000	50.86	---	74.00	23.14	100.0	V	316.0	11.8
4804.000000	---	41.71	54.00	12.29	100.0	V	316.0	11.8

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

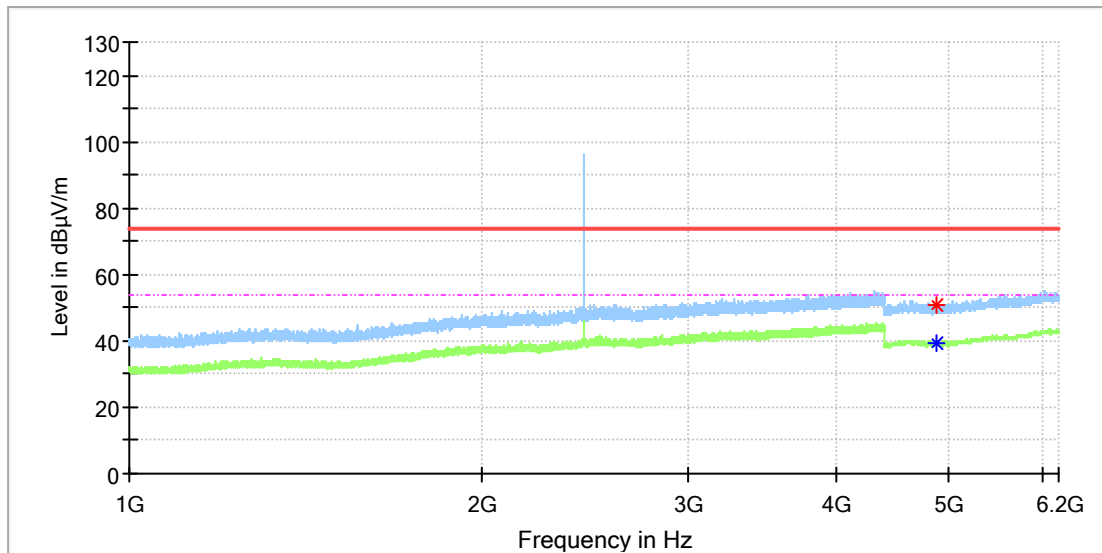


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.000000	50.63	---	74.00	23.37	100.0	H	235.0	11.8
4880.000000	---	39.17	54.00	14.83	100.0	H	117.0	11.8

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

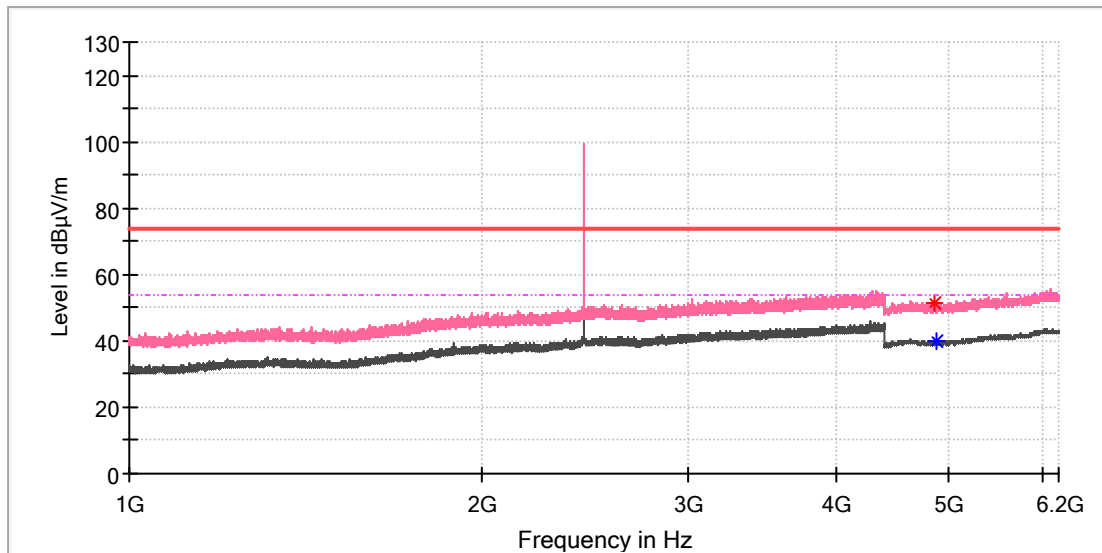


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4868.000000	51.26	---	74.00	22.74	100.0	V	286.0	11.8
4879.500000	---	39.66	54.00	14.34	100.0	V	73.0	11.8

EUT Information

EUT Name: Bluetooth module
 Model: RAK13400
 Test Mode: BLE 1M_High channel
 Order No/Sample No: 168376868/A003277567-005
 Test Voltage:: DC 5V From USB
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

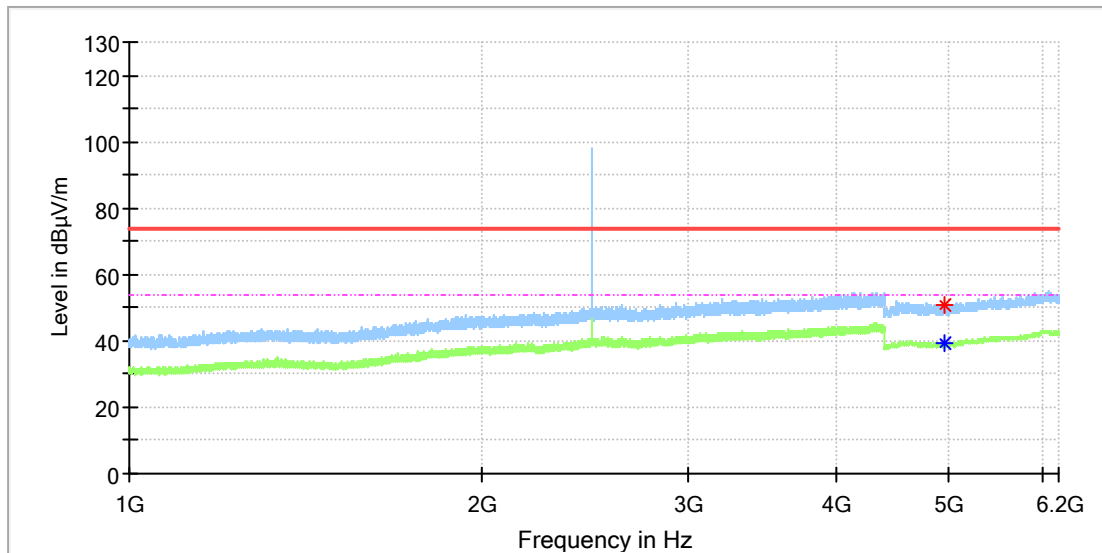


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4959.500000	50.88	---	74.00	23.12	100.0	H	223.0	11.8
4960.000000	---	39.54	54.00	14.46	100.0	H	119.0	11.8

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

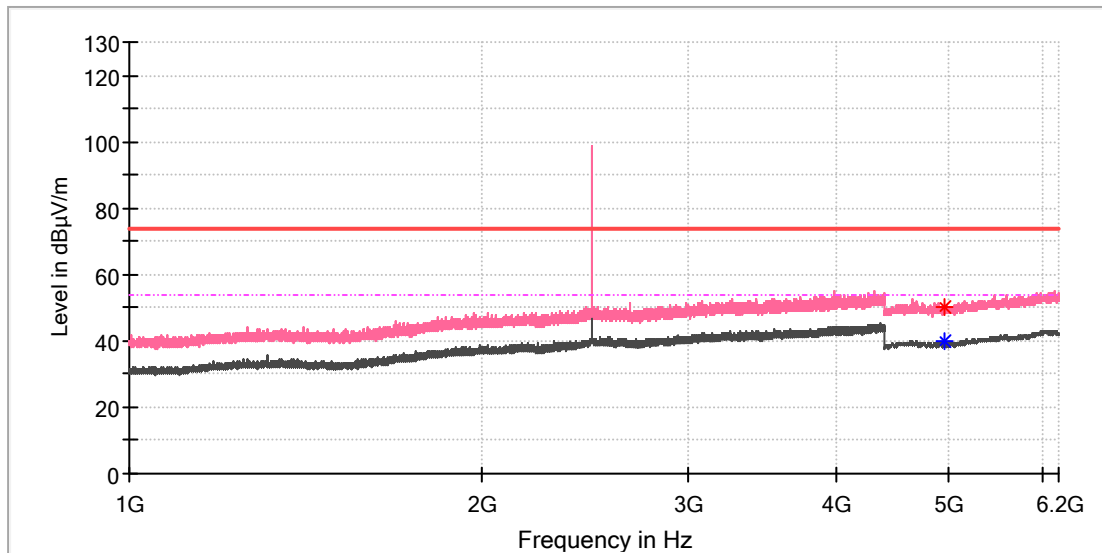


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4956.000000	50.21	---	74.00	23.79	100.0	V	0.0	11.8
4960.500000	---	39.72	54.00	14.28	100.0	V	277.0	11.8

EUT Information

EUT Name: Bluetooth module
 Model: RAK13400
 Test Mode: BLE 1M_Low channel
 Order No/Sample No: 168376868/A003277567-005
 Test Voltage:: DC 5V From USB
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

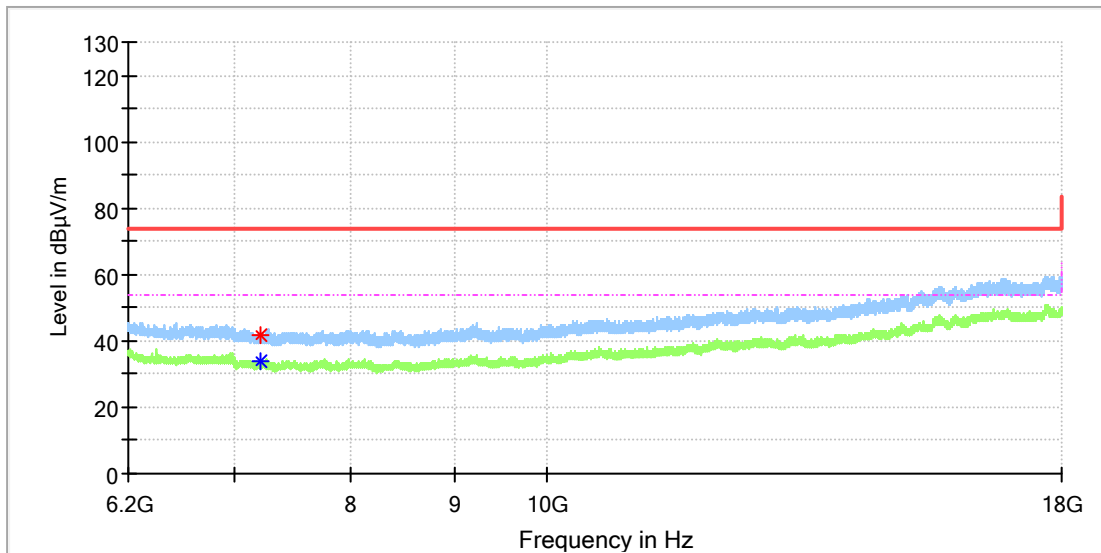


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7202.016667	42.01	---	74.00	31.99	100.0	H	0.0	8.8
7203.983333	---	33.99	54.00	20.01	100.0	H	295.0	8.8

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

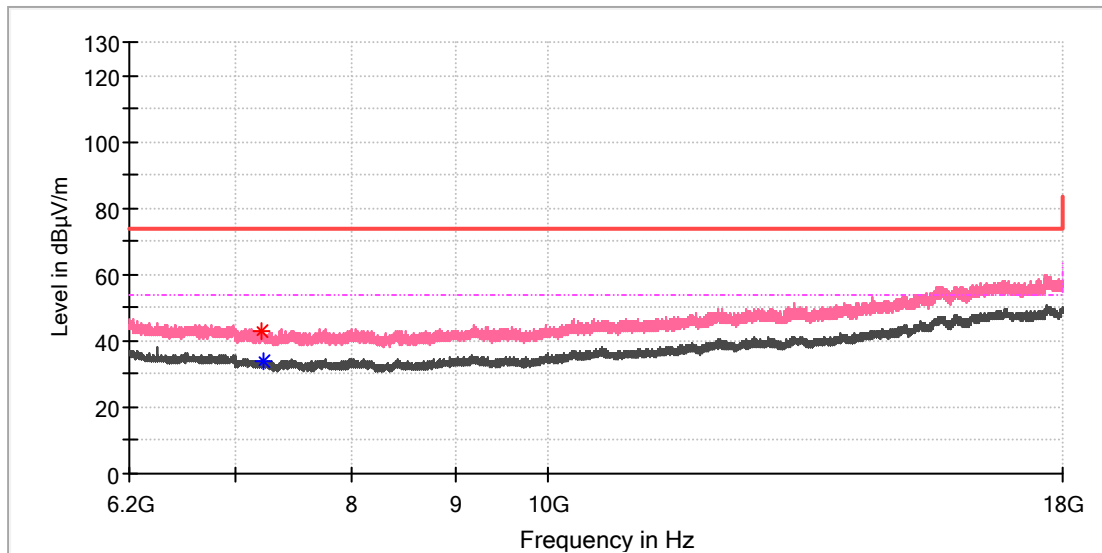


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7215.783333	42.84	---	74.00	31.16	100.0	V	244.0	8.7
7227.091667	---	34.12	54.00	19.88	100.0	V	259.0	8.7

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

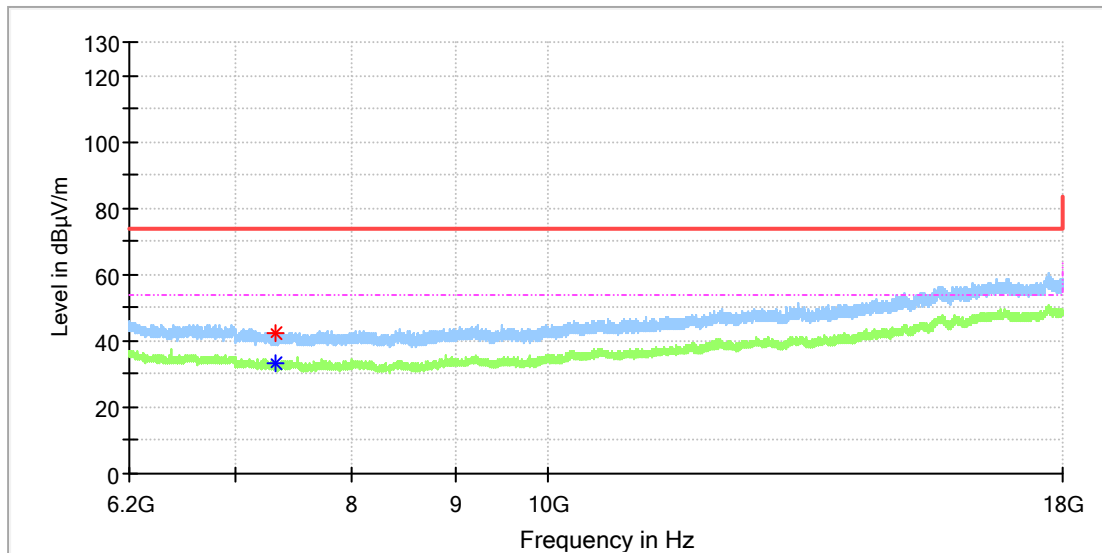


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7324.441667	42.16	---	74.00	31.84	100.0	H	261.0	8.2
7333.291667	---	33.16	54.00	20.84	100.0	H	98.0	8.1

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

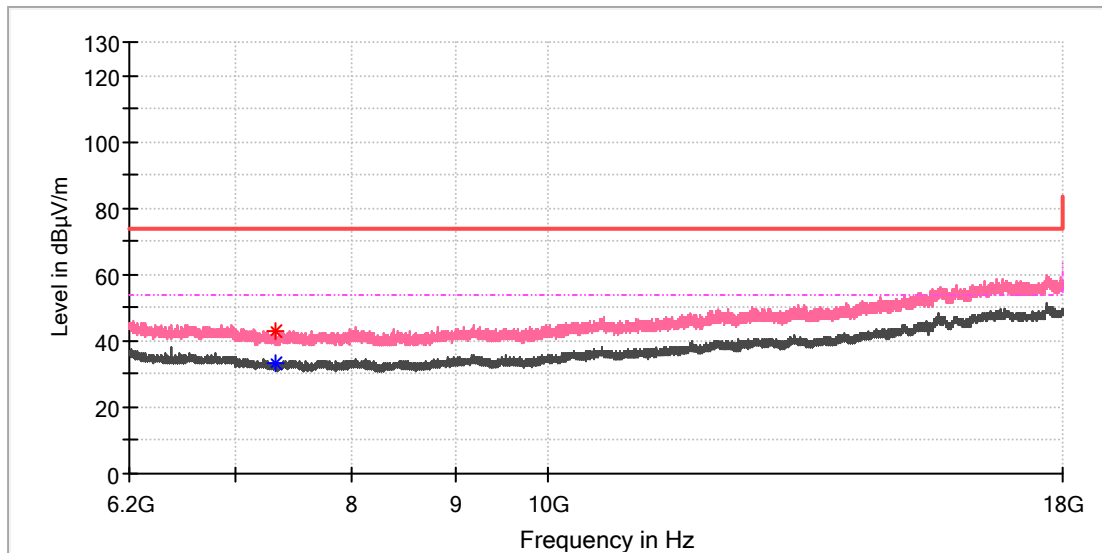


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7321.491667	42.94	---	74.00	31.06	100.0	V	81.0	8.2
7333.783333	---	33.42	54.00	20.58	100.0	V	9.0	8.1

EUT Information

EUT Name: Bluetooth module
 Model: RAK13400
 Test Mode: BLE 1M_High channel
 Order No/Sample No: 168376868/A003277567-005
 Test Voltage:: DC 5V From USB
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

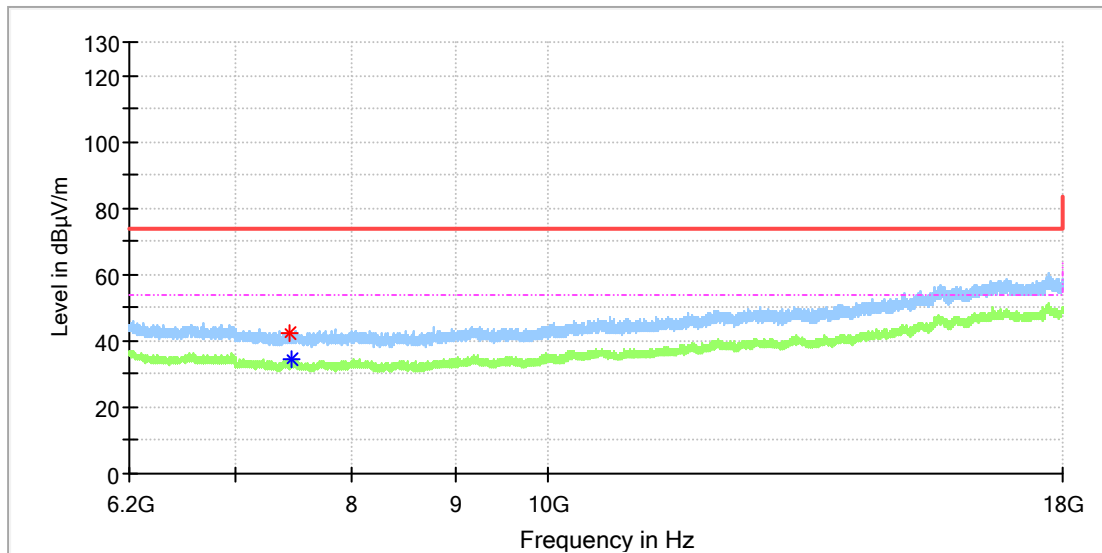


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7452.275000	42.42	---	74.00	31.58	100.0	H	139.0	8.5
7465.058333	---	34.73	54.00	19.27	100.0	H	269.0	8.6

EUT Information

EUT Name: Bluetooth module
 Model: RAK13400
 Test Mode: BLE 1M_High channel
 Order No/Sample No: 168376868/A003277567-005
 Test Voltage:: DC 5V From USB
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

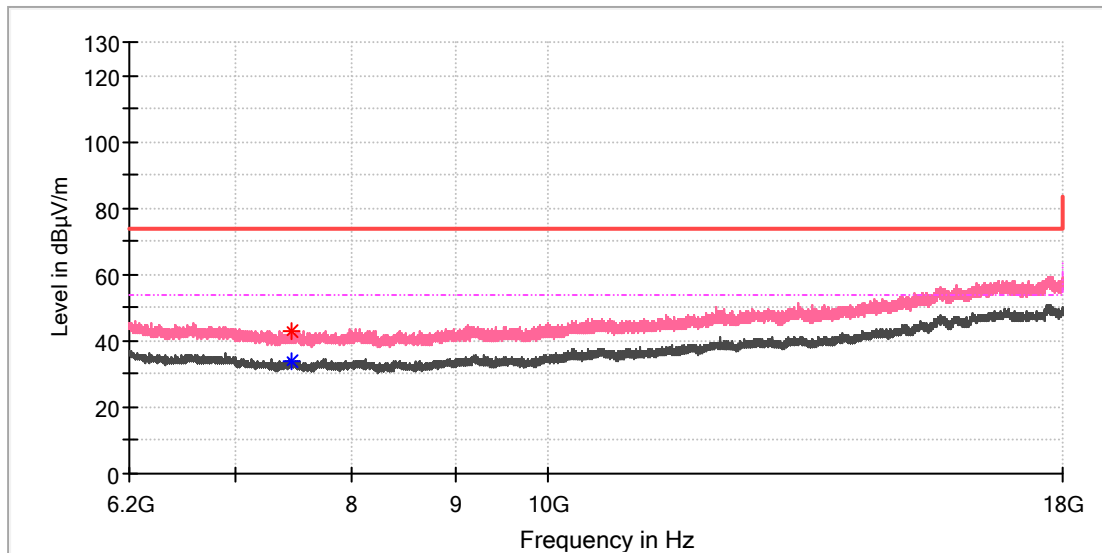


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7463.091667	---	33.82	54.00	20.18	100.0	V	0.0	8.6
7465.058333	42.96	---	74.00	31.04	100.0	V	288.0	8.6

Antenna SA04WEG01RA, 4.7dBi

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

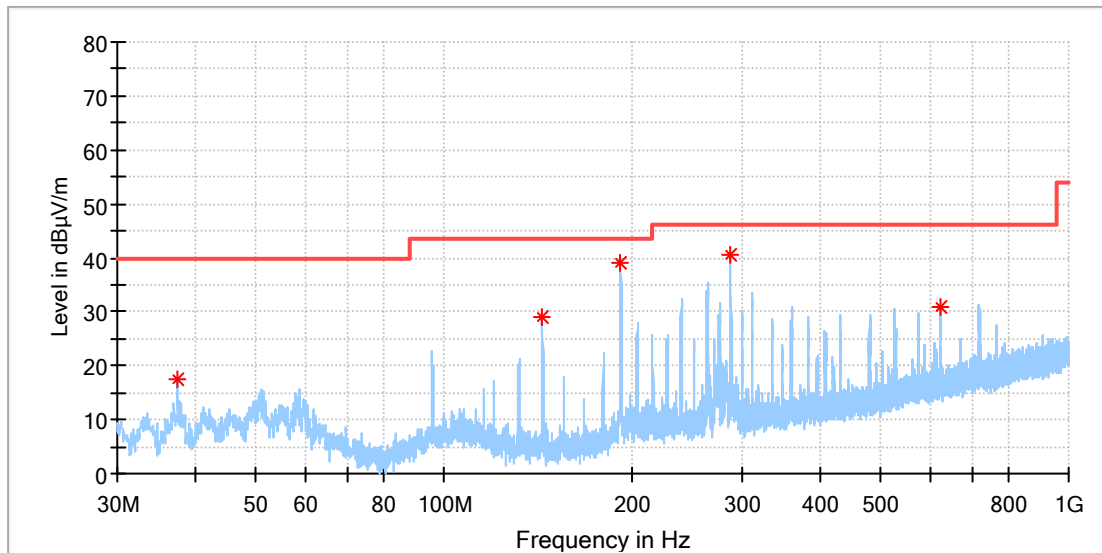


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.498846	17.62	40.00	22.38	100.0	H	244.0	-21.2
143.825769	28.85	43.50	14.65	100.0	H	130.0	-22.6
191.952692	39.18	43.50	4.32	100.0	H	356.0	-19.7
287.908077	40.42	46.00	5.58	100.0	H	311.0	-16.9
623.192308	30.97	46.00	15.03	100.0	H	179.0	-9.8

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

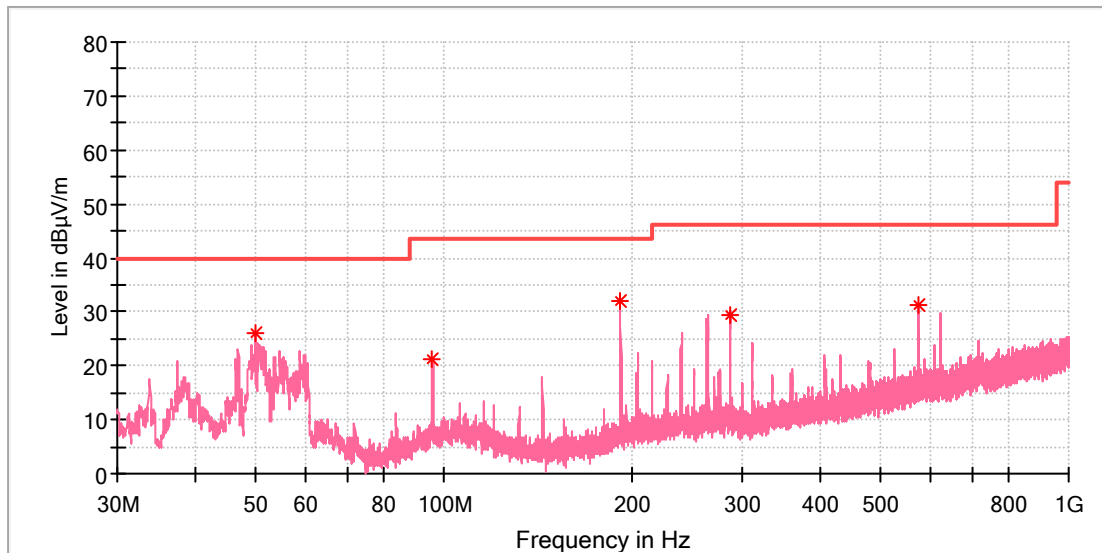


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.996923	26.09	40.00	13.91	100.0	V	13.0	-18.6
95.885385	21.23	43.50	22.27	100.0	V	163.0	-19.9
191.840769	32.02	43.50	11.48	100.0	V	310.0	-19.7
287.646923	29.52	46.00	16.48	100.0	V	0.0	-16.9
575.923462	31.09	46.00	14.91	100.0	V	286.0	-10.7

EUT Information

EUT Name: Bluetooth module
 Model: RAK13400
 Test Mode: BLE 1M_Low channel
 Order No/Sample No: 168376868/A003277567-005
 Test Voltage:: DC 5V From USB
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

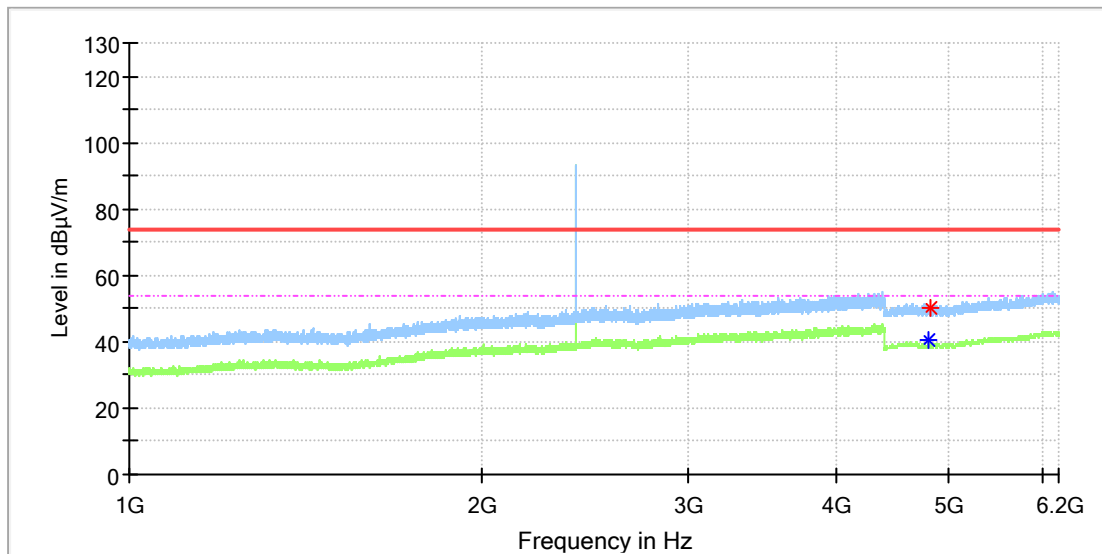


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.500000	---	40.51	54.00	13.49	100.0	H	76.0	11.8
4820.000000	50.34	---	74.00	23.66	100.0	H	83.0	11.8

EUT Information

EUT Name: Bluetooth module
 Model: RAK13400
 Test Mode: BLE 1M_Low channel
 Order No/Sample No: 168376868/A003277567-005
 Test Voltage:: DC 5V From USB
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

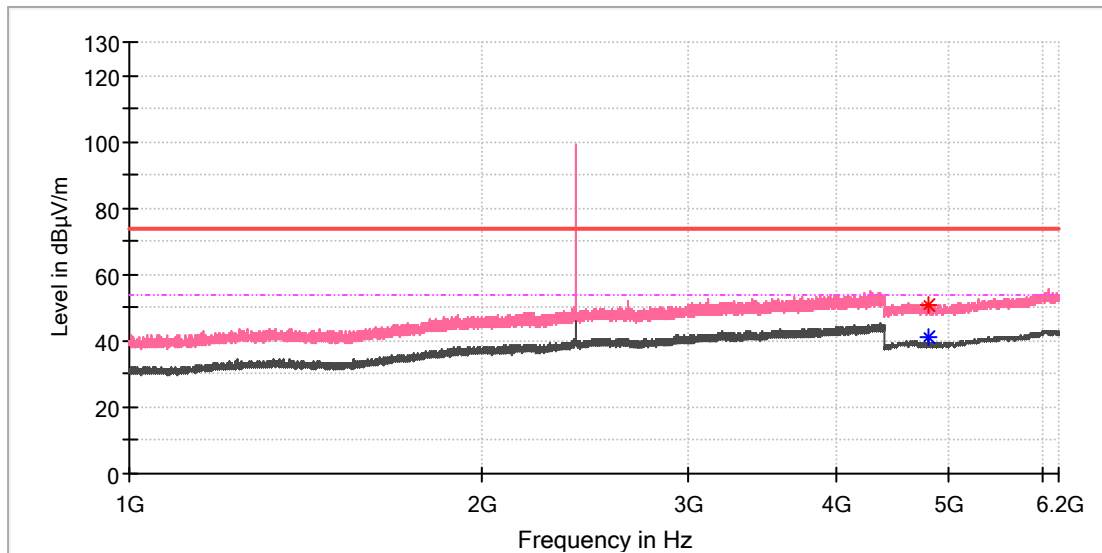


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.500000	50.80	---	74.00	23.20	100.0	V	279.0	11.8
4804.000000	---	41.01	54.00	12.99	100.0	V	279.0	11.8

EUT Information

EUT Name: Bluetooth module
 Model: RAK13400
 Test Mode: BLE 1M_Mid channel
 Order No/Sample No: 168376868/A003277567-005
 Test Voltage:: DC 5V From USB
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

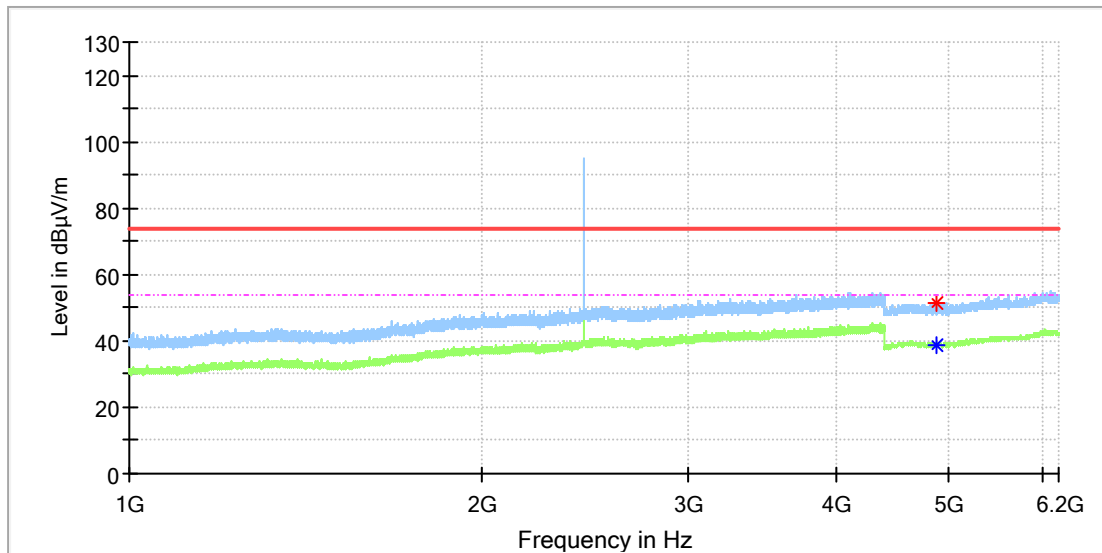


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4869.000000	51.14	---	74.00	22.86	100.0	H	245.0	11.8
4880.000000	---	38.91	54.00	15.09	100.0	H	232.0	11.8

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

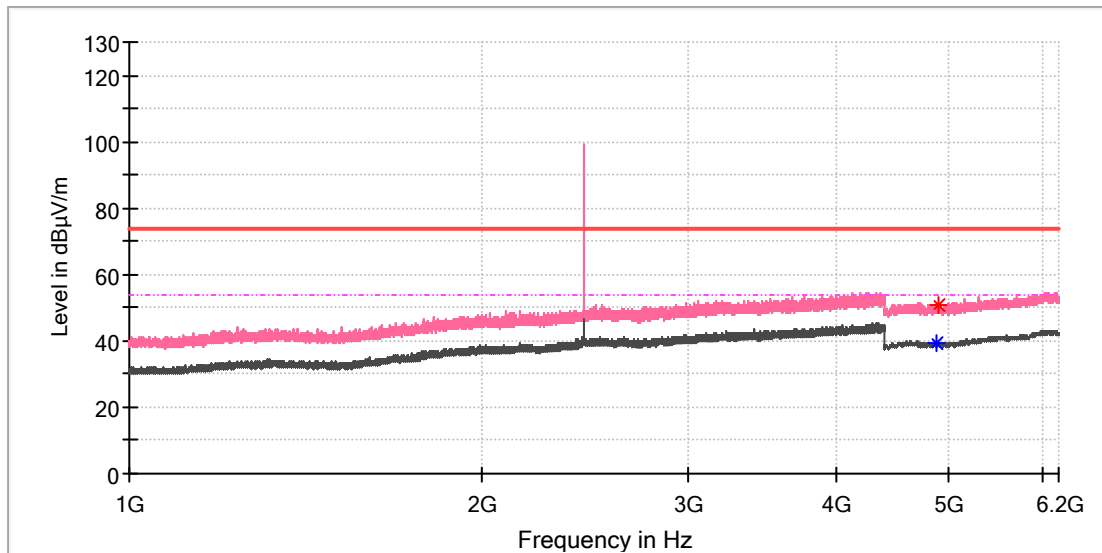


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4879.500000	---	39.39	54.00	14.61	100.0	V	18.0	11.8
4906.000000	50.64	---	74.00	23.36	100.0	V	25.0	11.8

EUT Information

EUT Name: Bluetooth module
 Model: RAK13400
 Test Mode: BLE 1M_High channel
 Order No/Sample No: 168376868/A003277567-005
 Test Voltage:: DC 5V From USB
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

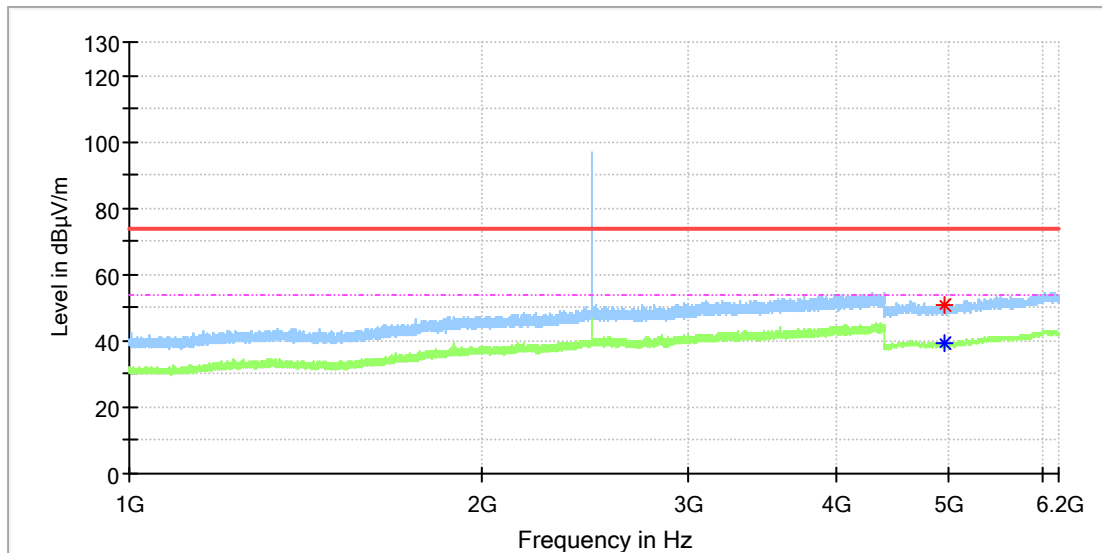


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4956.000000	---	39.45	54.00	14.55	100.0	H	1.0	11.8
4958.000000	50.89	---	74.00	23.11	100.0	H	32.0	11.8

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

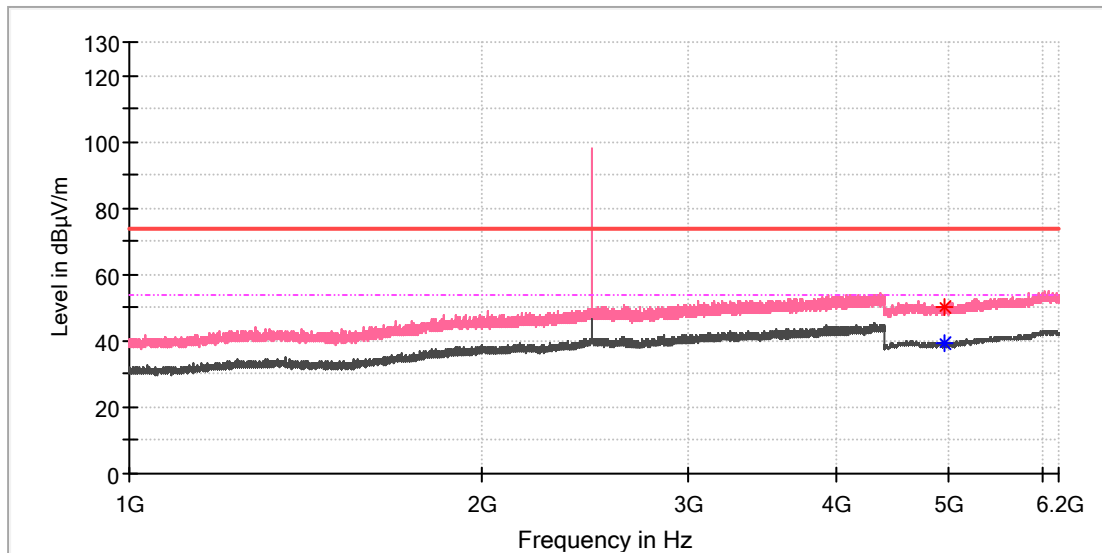


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4954.000000	50.41	---	74.00	23.59	100.0	V	134.0	11.8
4959.500000	---	39.53	54.00	14.47	100.0	V	90.0	11.8

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

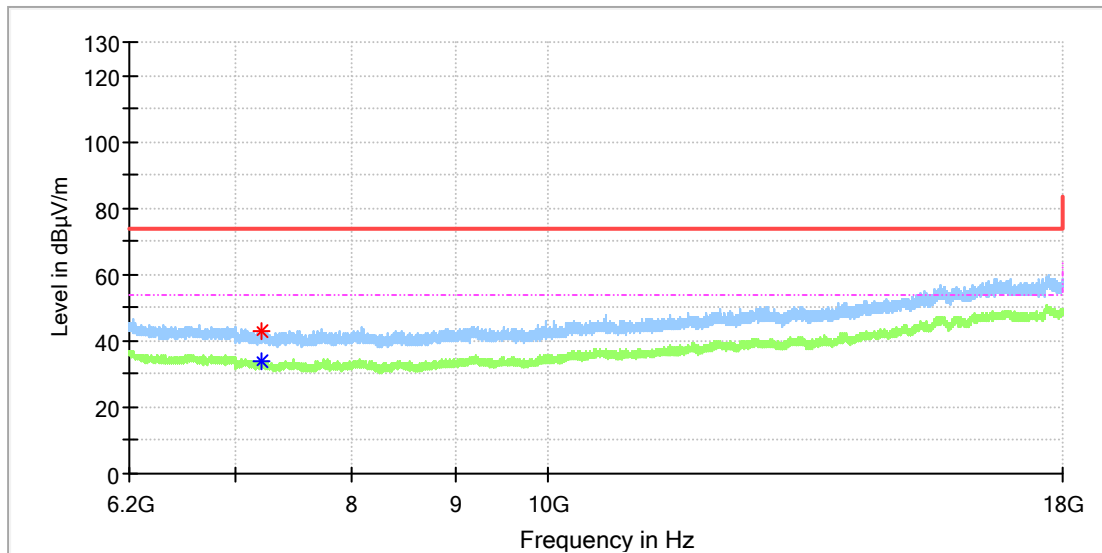


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7202.508333	43.01	---	74.00	30.99	100.0	H	244.0	8.8
7208.408333	---	33.78	54.00	20.22	100.0	H	116.0	8.8

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

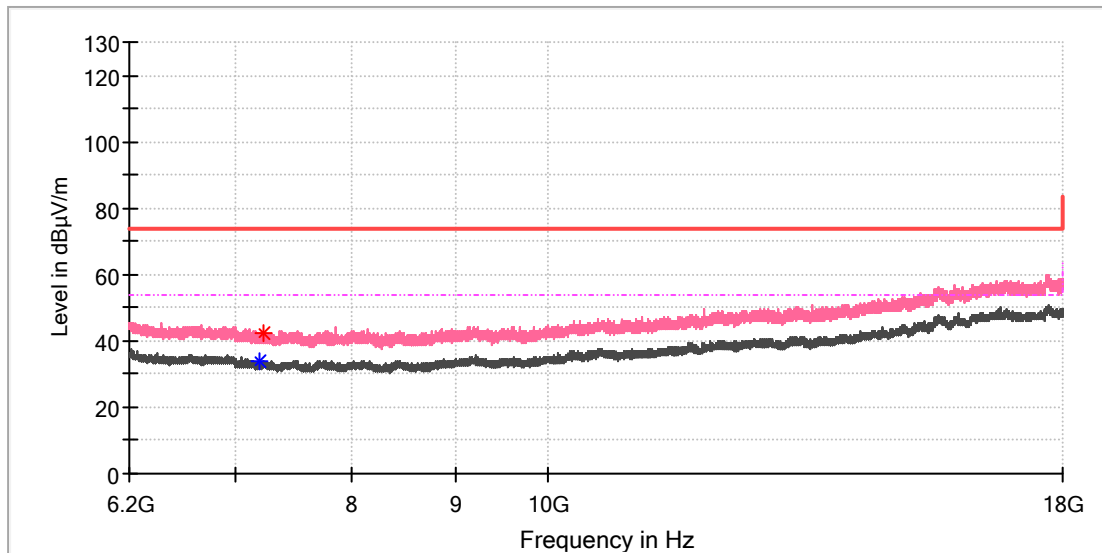


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7200.541667	---	33.74	54.00	20.26	100.0	V	73.0	8.8
7232.500000	42.59	---	74.00	31.41	100.0	V	236.0	8.6

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

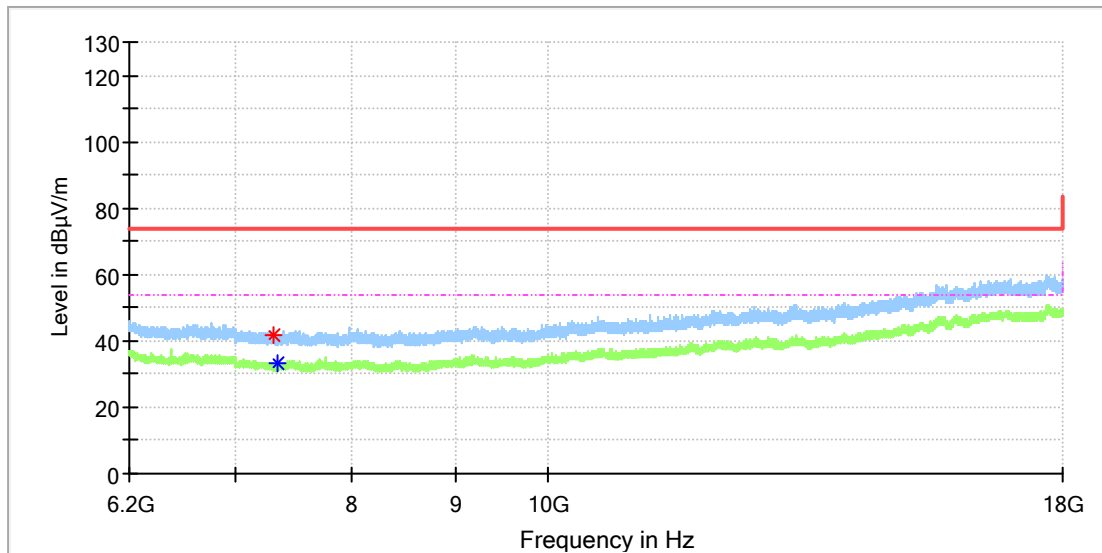


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7306.250000	41.88	---	74.00	32.12	100.0	H	0.0	8.3
7344.600000	---	33.15	54.00	20.85	100.0	H	0.0	8.1

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

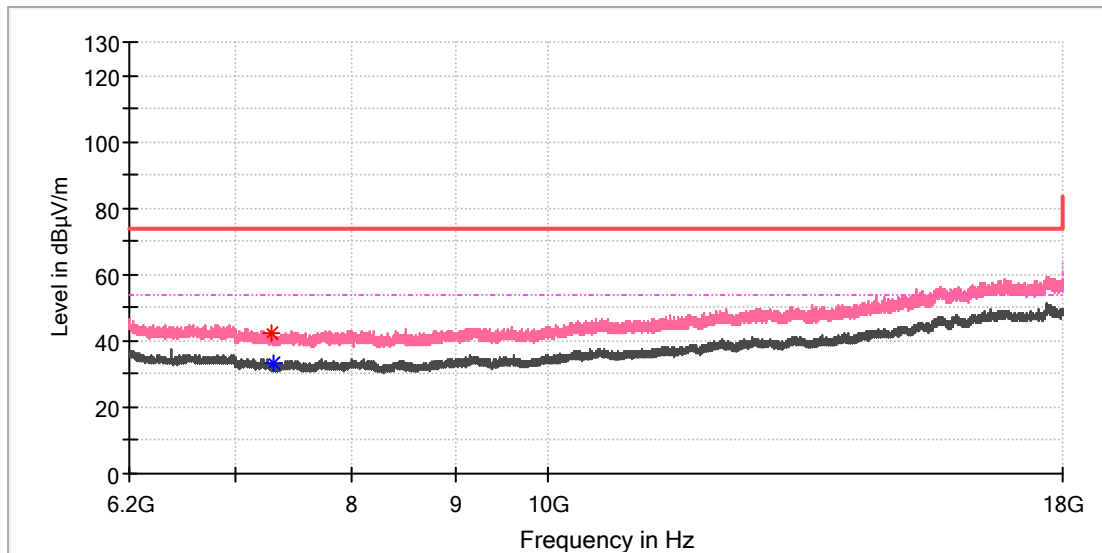


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7298.383333	42.42	---	74.00	31.58	100.0	V	339.0	8.3
7304.775000	---	33.43	54.00	20.57	100.0	V	43.0	8.3

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

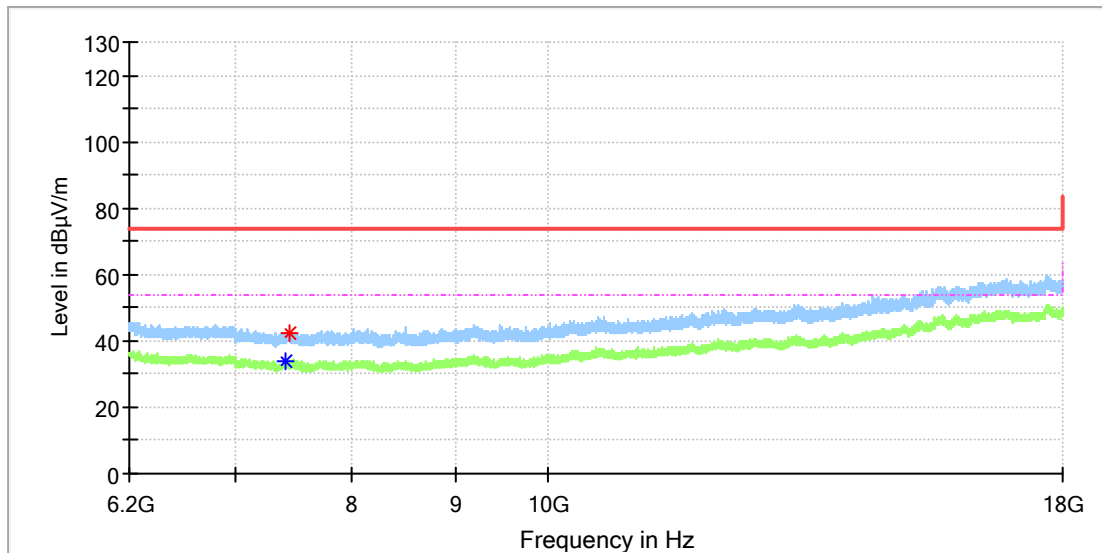


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7408.025000	---	34.02	54.00	19.98	100.0	H	6.0	8.3
7437.033333	42.61	---	74.00	31.39	100.0	H	299.0	8.4

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

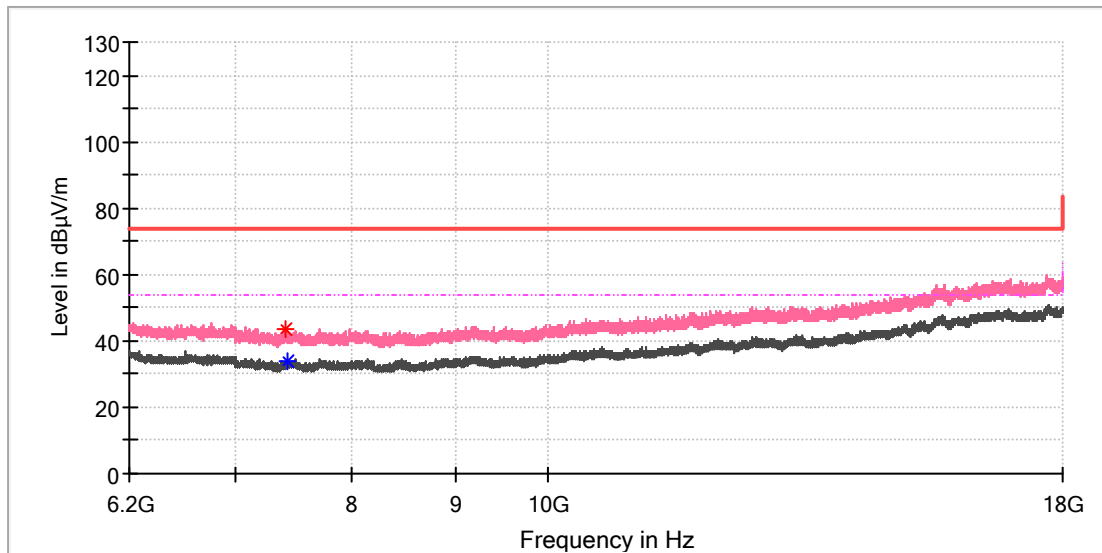

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7409.991667	43.74	---	74.00	30.26	100.0	V	273.0	8.3
7432.116667	---	33.98	54.00	20.02	100.0	V	287.0	8.4


Appendix B.6: Test Results of Radiated Emissions in Restricted Bands

BLE, 1Mbps

Antenna SA06LWEG01RA, 3.4dBi

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

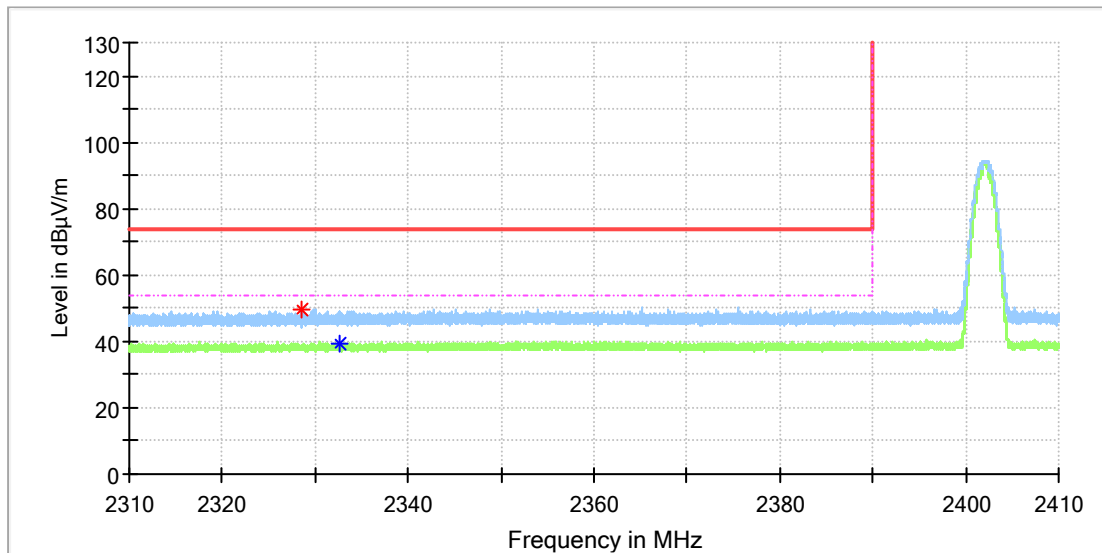


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2328.520000	49.61	---	74.00	24.39	100.0	H	162.0	6.7
2332.695000	---	39.56	54.00	14.44	100.0	H	107.0	6.7

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

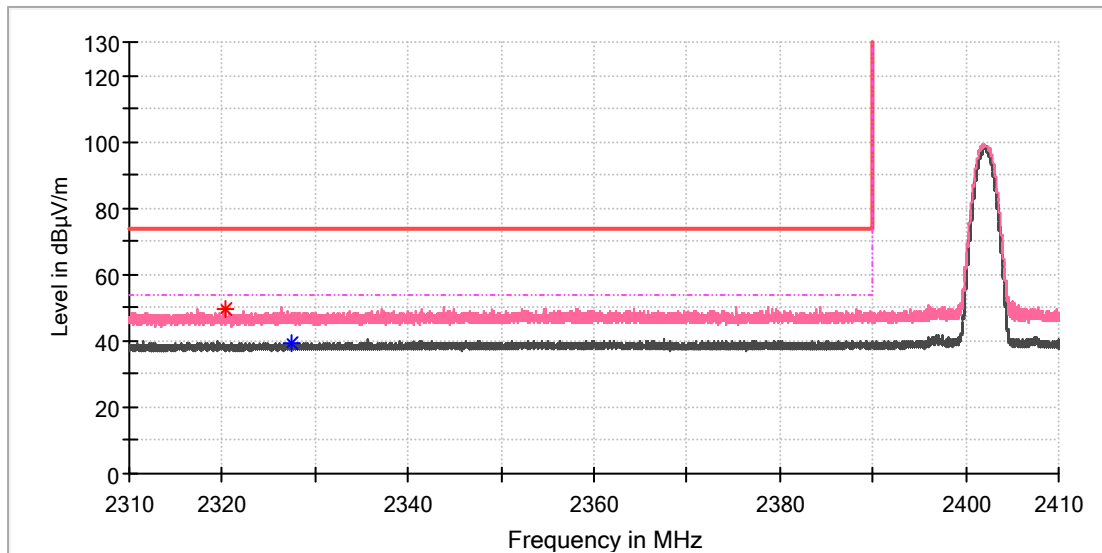


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2320.380000	49.41	---	74.00	24.59	100.0	V	231.0	6.6
2327.455000	---	39.59	54.00	14.41	100.0	V	264.0	6.7

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

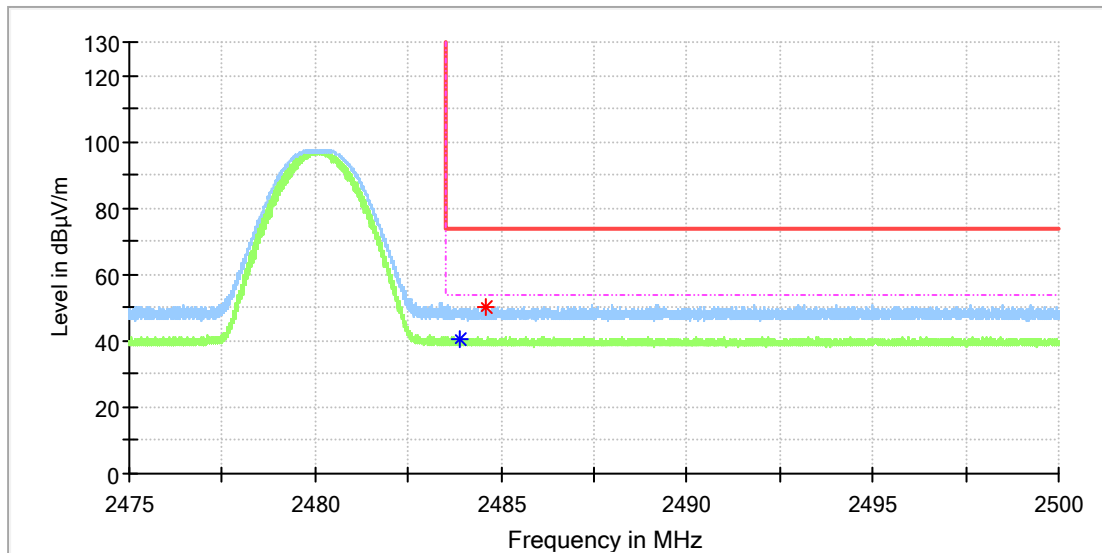


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.866250	---	40.66	54.00	13.34	100.0	H	151.0	7.4
2484.565000	50.34	---	74.00	23.66	100.0	H	0.0	7.4

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

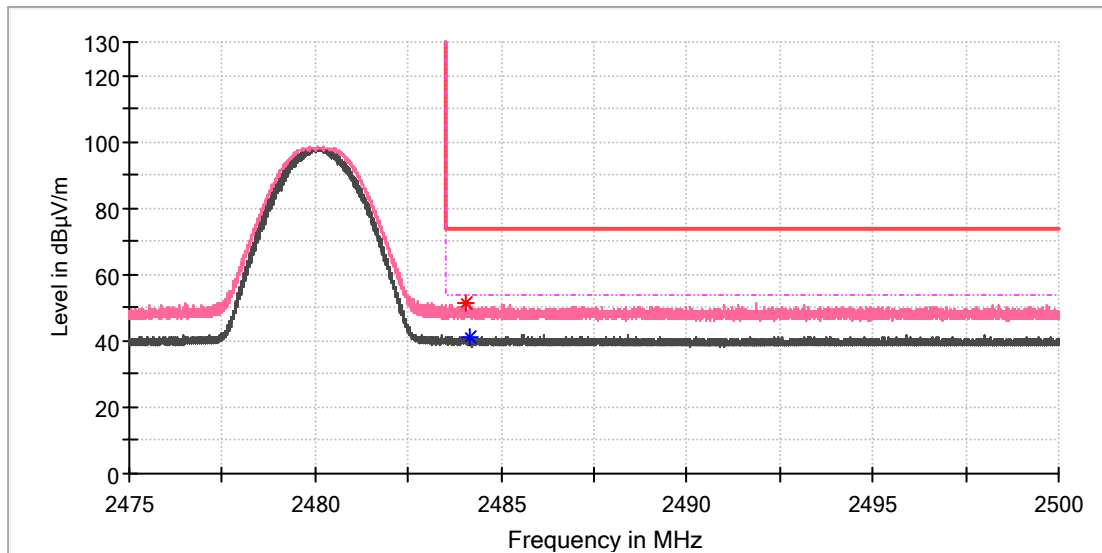


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.038750	51.22	---	74.00	22.78	100.0	V	206.0	7.4
2484.163750	---	41.11	54.00	12.89	100.0	V	0.0	7.4

Antenna SA04WEG01RA, 4.7dBi

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

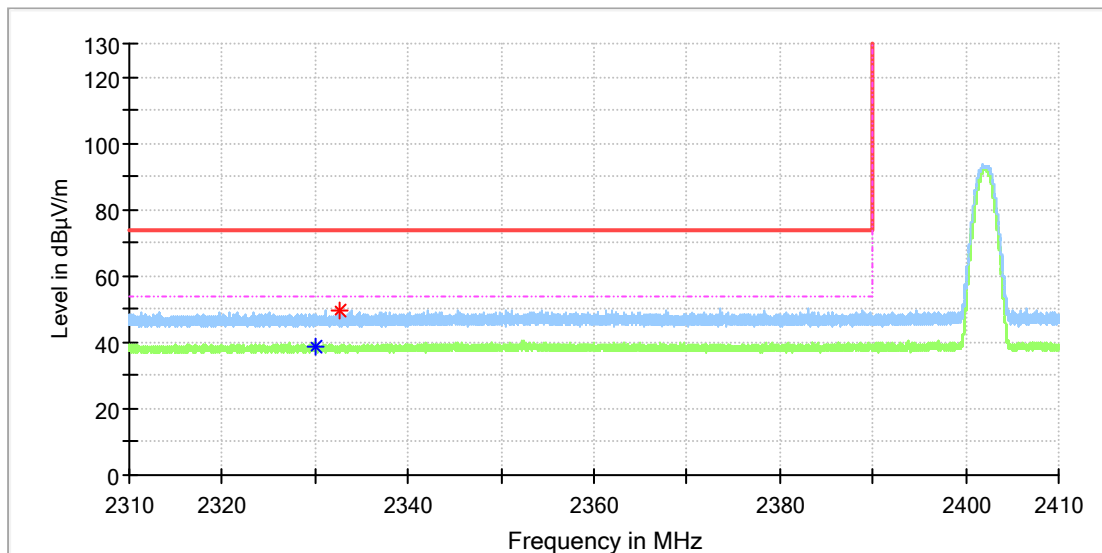


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2330.025000	---	38.85	54.00	15.15	100.0	H	300.0	6.7
2332.680000	49.54	---	74.00	24.46	100.0	H	231.0	6.7

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

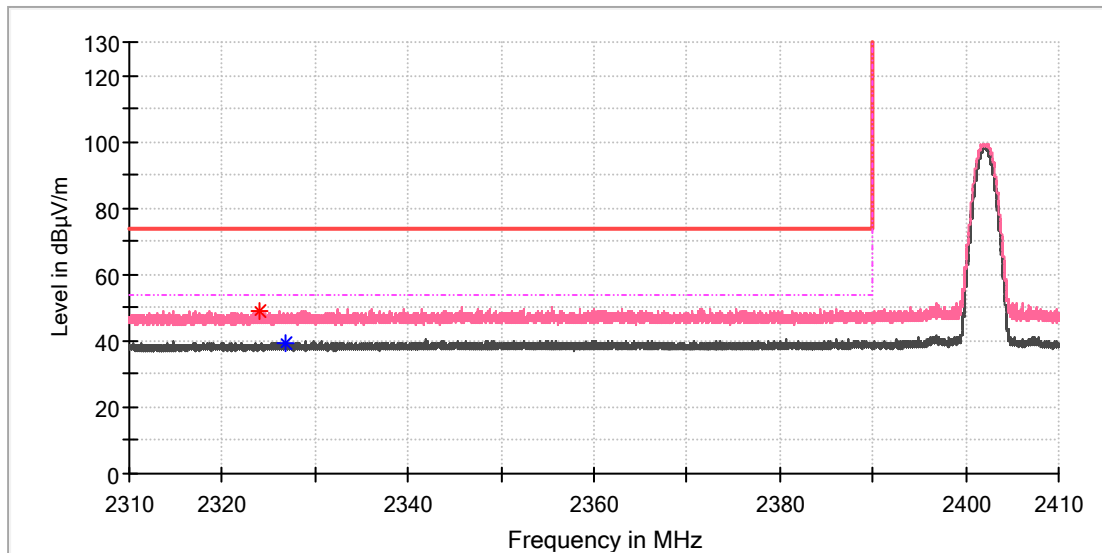


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2323.935000	49.22	---	74.00	24.78	100.0	V	152.0	6.6
2326.710000	---	39.49	54.00	14.51	100.0	V	73.0	6.7

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

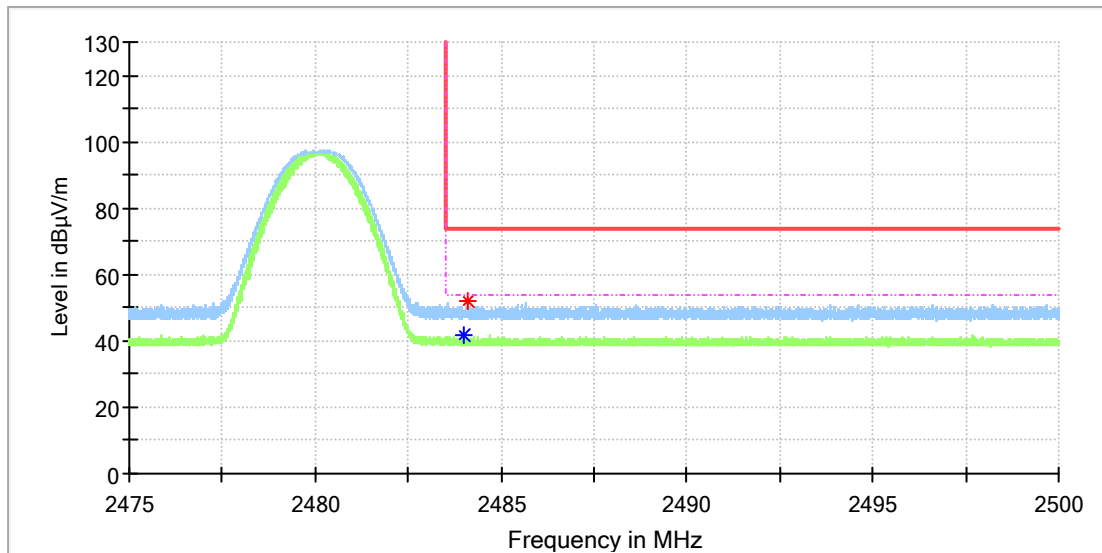


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.002500	---	41.52	54.00	12.48	100.0	H	47.0	7.4
2484.125000	51.89	---	74.00	22.11	100.0	H	268.0	7.4

EUT Information

EUT Name:	Bluetooth module
Model:	RAK13400
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168376868/A003277567-005
Test Voltage::	DC 5V From USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

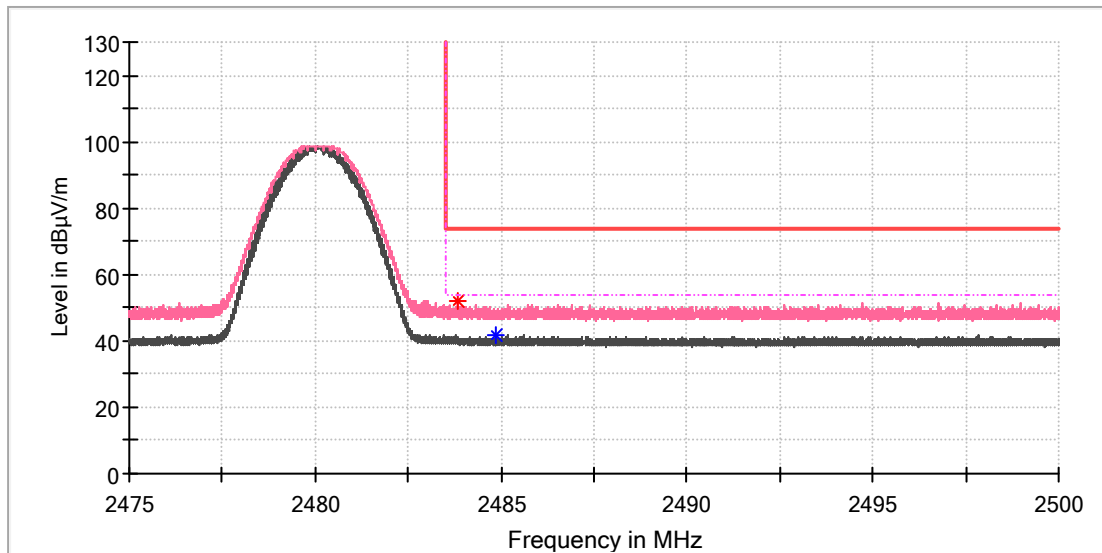


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.853750	51.75	---	74.00	22.25	100.0	V	141.0	7.4
2484.872500	---	41.57	54.00	12.43	100.0	V	141.0	7.4

Appendix B.7: Test Results of Conducted Emissions on AC Mains

EUT Information

EUT Name: Bluetooth Module
 Order No: 168340836_P00467139
 Model: RAK13400
 Test mode: ON
 Test Voltage: AC 120V/60Hz
 Test By: Ouyang Wang
 Review By: Gary Chen
 Remark: SR2

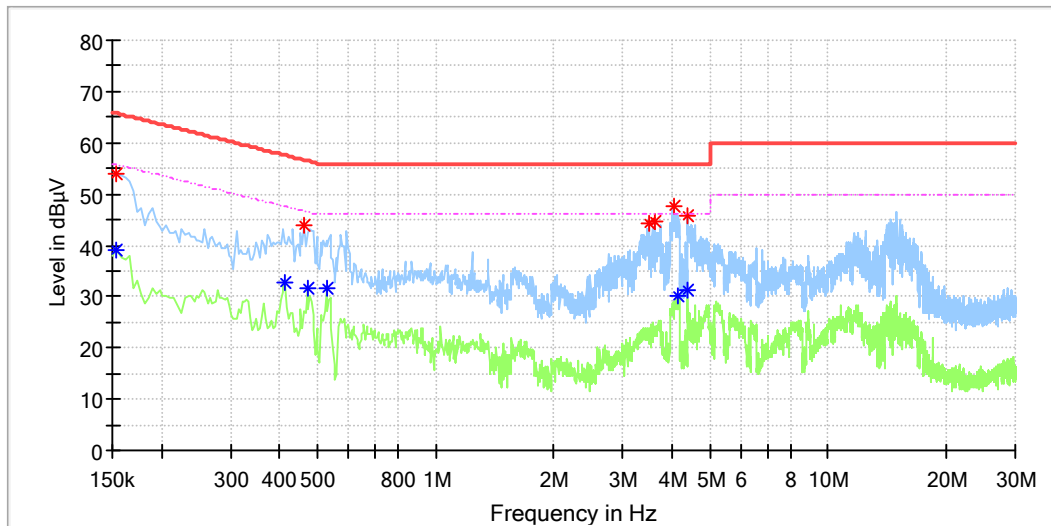


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.154000	53.98	---	65.78	11.80	L1	9.9
0.154000	---	38.89	55.78	16.89	L1	9.9
0.414000	---	32.66	47.57	14.91	L1	9.9
0.462000	44.05	---	56.66	12.60	L1	10.0
0.470000	---	31.64	46.51	14.87	L1	10.0
0.526000	---	31.49	46.00	14.51	L1	10.0
3.502000	44.34	---	56.00	11.66	L1	10.2
3.626000	44.53	---	56.00	11.47	L1	10.2
4.030000	47.62	---	56.00	8.38	L1	10.2
4.162000	---	30.12	46.00	15.88	L1	10.2
4.378000	45.60	---	56.00	10.40	L1	10.2
4.378000	---	31.30	46.00	14.70	L1	10.2

EUT Information

EUT Name:	Bluetooth Module
Order No:	168340836_P00467139
Model:	RAK13400
Test mode:	ON
Test Voltage:	AC 120V/60Hz
Test By:	Ouyang Wang
Review By:	Gary Chen
Remark:	SR2

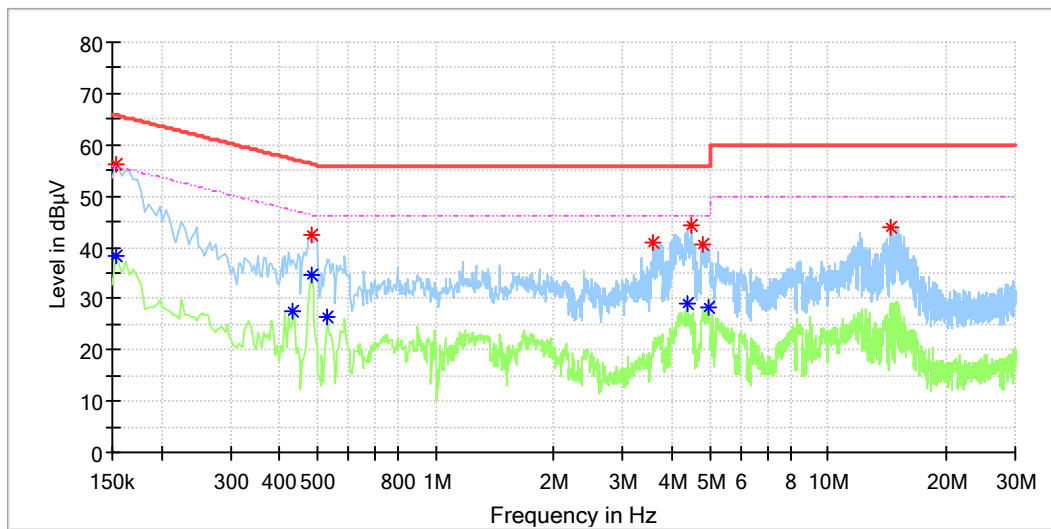

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.154000	56.29	---	65.78	9.49	N	9.8
0.154000	---	38.19	55.78	17.59	N	9.8
0.434000	---	27.53	47.18	19.65	N	9.8
0.482000	---	34.44	46.31	11.87	N	9.8
0.482000	42.59	---	56.31	13.71	N	9.8
0.530000	---	26.59	46.00	19.41	N	9.8
3.590000	40.82	---	56.00	15.18	N	9.9
4.374000	---	28.88	46.00	17.12	N	9.9
4.470000	44.13	---	56.00	11.87	N	9.9
4.814000	40.56	---	56.00	15.44	N	9.9
4.970000	---	28.19	46.00	17.81	N	9.9
14.454000	44.00	---	60.00	16.00	N	10.1