

ANT Datasheet



HL GLOBAL

PRELIMINARY ENGINEERING DATASHEET

SA06LWEG01RA

HL GLOBAL
850 NEW BURTON ROAD.
SUITE 201, DOVER, DE 19904
UNITED STATES OF AMERICA

INFORMATION:
INFO@HLGLOBALCORP.COM



Datasheet Revision History

Revision	Date	Change Log
SA06LWEG01RA/ Rev.1	28 th /Apr /2022	Preliminary Datasheet 1.0
SA06LWEG01RA/ Rev.2	18 th /May /2022	Update Product Photographs and Principal Dimensions and Assembly Drawing

Disclaimer

The information in this document is provided for a specific HL Global product and is proprietary and confidential. HL Global reserves the right to make changes at any time, without notice. HL Global reserves all rights to this document and the information contained herein. Reproduction or disclosure of the document to third parties without express permission is strictly prohibited. Please kindly confirm antenna product details with HL Global before finalizing your product design.



Tables of Contents

1. Antenna Product Description	4
2. Features Overview.....	4
3. Product Photographs	5
4. Antenna Specification Summary	6
5. Principal Dimensions	7
6. Return Loss.....	7
7. Radiation Pattern Characteristics.....	10
8. Realized Efficiency and Peak Realized Gain	13
9. Assembly Drawing.....	19

Figures

Figure 1.Photo of HL GLOBAL antenna SA06LWEG01RA.....	5
Figure 2.Basic dimensions and tolerances of SA06LWEG01RA antenna.....	7
Figure 3.Measured Return Loss of SA06LWEG01RA.....	9
Figure 4.SA06LWEG01RA antenna for radiation pattern measurements. Coordinate system used for radiation pattern	10
Figure 5.Measured radiation pattern characteristics in principal planes at LTE@ 830MHz	10
Figure 6.Measured radiation pattern characteristics in principal planes at LTE@1850MHz	10
Figure 7.Measured radiation pattern characteristics in principal planes at LTE@2155MHz	11
Figure 8.Measured radiation pattern characteristics in principal planes at LTE@2600MHz	11
Figure 9.Measured radiation pattern characteristics in principal planes at WIFI@2450MHz	11
Figure 10.Measured radiation pattern characteristics in principal planes at WIFI@5500MHz	12
Figure 11.Measured radiation pattern characteristics in principal planes at BLE@2450MHz	12
Figure 12.Measured radiation pattern characteristics in principal planes at GNSS@1575MHz/1596MHz/1602MHz	12
Figure 13.Measured Realized Efficiency over frequency.....	14
Figure 14.Measured Peak Realized gain over frequency.....	16
Figure 15.Assembly Drawing.....	19

Tables

Table 1. SA06LWEG01RA antenna specification summary.....	6
Table 2.Summary of peak realized gain and realized efficiency results.....	18



1. Antenna Product Description

SA06LWEG01RA Embedded Antenna features provides a high performance, off-board and cable feeding antenna solution. It was designed for 2x LTE antenna (700—960MHz, 1710—1990 MHz, 2110—2200 MHz, 2500-2700 MHz), 2x 2.4/5G WIFI (2400-2490 MHz, 5150-5850 MHz), 1 x BLE(2400-2490 MHz), 1x GNSS (GPS L1 1575.42 $\pm$ 2 MHz, GLONASS L1 1602.5625 $\pm$ 4 MHz).

2. Features Overview

SA06LWEG01RA Embedded Antenna features

- Covering 2x LTE antenna (700—960MHz, 1710—1990 MHz, 2110—2200 MHz, 2500-2700 MHz), 2x 2.4/5G WIFI (2400-2490 MHz, 5150-5850 MHz), 1 x BLE(2400-2490 MHz), 1x GNSS (GPS L1 1575.42 $\pm$ 2 MHz, GLONASS L1 1602.5625 $\pm$ 4 MHz) freq
- 1.0dBi@LTE-B_0.746GHz; 3.5dBi@ LTE-B_1.745GHz; 4.2dBi@ LTE-B_2.11GHz; 5.1dBi@ LTE-B_2.69GHz;
- 1.1dBi@LTE-W_0.769GHz; 3.8dBi@ LTE-W_1.95GHz; 2.9dBi@ LTE-W_2.17GHz; 4.3 dBi@ LTE-W_2.55GHz;
- 4.5dBi@WIFI-W_2.47GHz; 6.4dBi@WIFI-W_5.75GHz;
- 4.5dBi@WIFI-G_2.49GHz; 7.2dBi@WIFI-G_5.55GHz;
- 3.4dBi@BLE_2.48GHz;
- 28.74dBi@GNSS_1.575GHz ;30.34dBi@GNSS_1.602GHz.
- Superior performance
- Off-board, low profile design
- Low Cost, High performance



4. Antenna Specification Summary

Wireless Standard	LTE,WIFI,BLE,GNSS
Frequency Range	2x LTE antenna (700—960MHz, 1710—1990 MHz, 2110—2200 MHz, 2500-2700 MHz) , 2x 2.4/5G WiFi (2400-2490MHz,5150-5850 MHz) ,1 x BLE(2400-2490 MHz),1x GNSS (GPS L1 1575.42 ±2 MHz, GLONASS L1 1602.5625±4 MHz)
Peak Realized Gain	1.0dBi@LTE-B_0.746GHz; 3.5dBi@ LTE-B_1.745GHz; 4.2dBi@ LTE-B_2.11GHz; 5.1dBi@ LTE-B_2.69GHz; 1.1dBi@LTE-W_0.769GHz; 3.8dBi@ LTE-W_1.95GHz; 2.9dBi@ LTE-W_2.17GHz;4.3 dBi@ LTE-W_2.55GHz; 4.5dBi@WIFI-W_2.47GHz; 6.4dBi@WIFI-W_5.75GHz; 4.5dBi@WIFI-G_2.49GHz; 7.2dBi@WIFI-G_5.55GHz; 3.4dBi@BLE_2.48GHz; 28.74dBi@GNSS_1.575GHz ;30.34dBi@GNSS_1.602GHz.
Realized Efficiency	62%@LTE-B_0.746GHz; 48%@ LTE-B_1.745GHz;46 %@ LTE-B_2.11GHz; 51%@ LTE-B_2.69GHz; 55%@LTE-W_0.769GHz; 50%@ LTE-W_1.95GHz; 42%@ LTE-W_2.17GHz;38%@ LTE-W_2.55GHz; 63%@WIFI-W_2.47GHz;68%@WIFI-W_5.75GHz; 65%@WIFI-G_2.49GHz;68%@WIFI-G_5.55GHz; 47%@BLE_2.48GHz
Return Loss	LTE>3dB;WIFI>7dB;BLE>10dB;GNSS>10dB.
Polarization	Linear Polarization
Radiation Pattern	Omni-directional
Feed Impedance	50Ω
Power Handling	30dBm
Antenna Structure	Metal
Feeding Description	Cable Feeding
Antenna Dimensions	210.2*210.2*24.11(mm)
Weight	210.0g
Temperature Range	Operating temperature: -40° C to +75° C (-40° F to +167° F) Storage temperature: -40° C to +85° C (-40° F to +185° F)

Table 1. SA06LWEG01RA antenna specification summary.

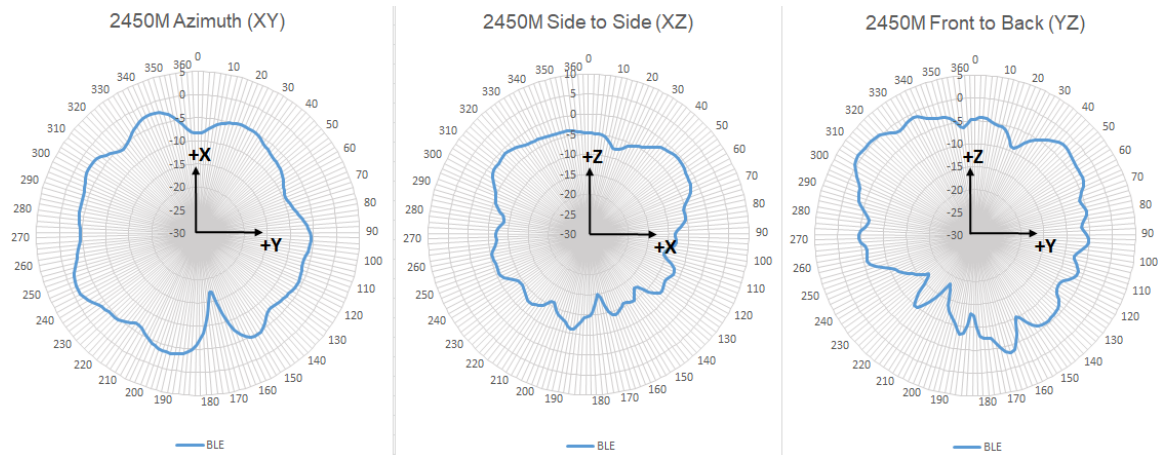


Figure 11.Measured radiation pattern characteristics in principal planes at BLE@2450MHz .

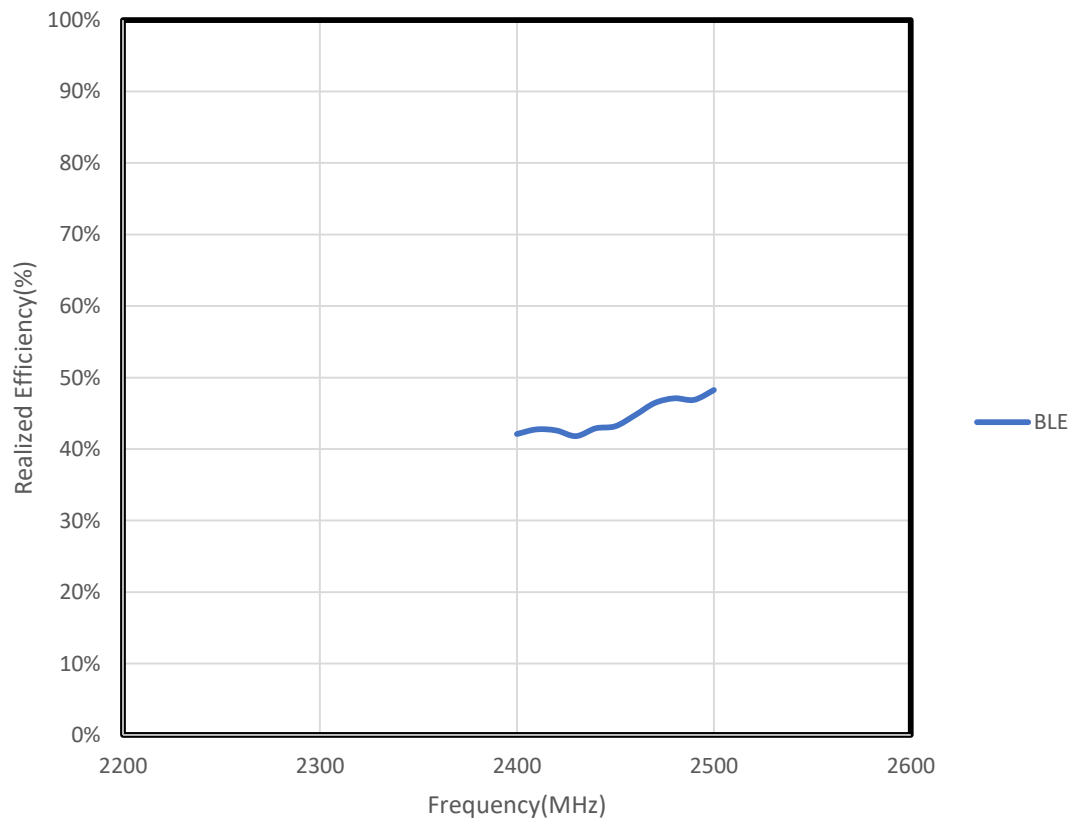


Figure 13.Measured Realized Efficiency over frequency.

