

<b>Prüfbericht-Nr.:</b> <i>Test report no.:</i>	<b>CN22ZW0R 001</b>	<b>Auftrags-Nr.:</b> <i>Order no.:</i>	168376259	Seite 1 von 32 <i>Page 1 of 32</i>	
<b>Kunden-Referenz-Nr.:</b> <i>Client reference no.:</i>	N/A	<b>Auftragsdatum:</b> <i>Order date:</i>	2022-05-26		
<b>Auftraggeber:</b> <i>Client:</i>	<b>Shenzhen RAKwireless Technology Co.,Ltd.</b> Room 506, Building B, New Compark, Pingshan First Road, Taoyuan Street, Nanshan District, Shenzhen, Guangdong, China				
<b>Prüfgegenstand:</b> <i>Test item:</i>	WisLink LPWAN Concentrator				
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type no.:</i>	RAK5147 (Trademark: RAK)				
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	FCC and IC approval				
<b>Prüfgrundlage:</b> <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 CFR47 FCC Part 2: Section 2.1093	RSS-247 Issue 2 February 2017 RSS-Gen Issue 5 February 2021 RSS-102 Issue 5 February 2021			
<b>Wareneingangsdatum:</b> <i>Date of sample receipt:</i>	2022-06-08	Please refer to photo documents			
<b>Prüfmuster-Nr.:</b> <i>Test sample no.:</i>	A003275919				
<b>Prüfzeitraum:</b> <i>Testing period:</i>	2022-06-16 - 2022-06-27				
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.				
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.				
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass				
<b>geprüft von:</b> <i>tested by:</i>			<b>genehmigt von:</b> <i>authorized by:</i>		
<b>Datum:</b> <i>Date:</i>	2022-07-19		<b>Ausstellungsdatum:</b> <i>Issue date:</i>	2022-07-21	
	<small>Signed by: Alex Lan</small>			<small>Signed by: Lin Lin</small>	
<b>Stellung / Position</b>	Assistant Project Manager		<b>Stellung / Position</b>	Reviewer	
<b>Sonstiges / Other:</b>	FCC ID: 2AF6B-RAK5147 IC: 25908-RAK5147, HVIN: RAK5147				
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged:</i>				
<b>Legend:</b>	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n) 1 = very good P(ass) = passed a.m. test specifications(s)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n) 2 = good F(ail) = failed a.m. test specifications(s)	3 = befriedigend 3 = satisfactory	4 = ausreichend 4 = sufficient	5 = mangelhalt N/T = nicht getestet 5 = poor N/T = not tested
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b>					
<i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

## Test Summary

**5.1.1 ANTENNA REQUIREMENT***RESULT: Pass***5.1.2 MAXIMUM CONDUCTED OUTPUT POWER***RESULT: Pass***5.1.3 CONDUCTED POWER SPECTRAL DENSITY***RESULT: Pass***5.1.4 6dB BANDWIDTH***RESULT: Pass***5.1.5 20dB BANDWIDTH***RESULT: Pass***5.1.6 99% BANDWIDTH***RESULT: Pass***5.1.7 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH***RESULT: Pass***5.1.8 RADIATED SPURIOUS EMISSION***RESULT: Pass***5.1.9 CARRIER FREQUENCY SEPARATION***RESULT: Pass***5.1.10 NUMBER OF HOPPING FREQUENCY***RESULT: Pass***5.1.11 TIME OF OCCUPANCY***RESULT: Pass***5.1.12 CONDUCTED EMISSION ON AC MAINS***RESULT: Pass***6.1.1 ELECTROMAGNETIC FIELDS***RESULT: Pass*

## Contents

<b>1</b>	<b>GENERAL REMARKS .....</b>	<b>5</b>
<b>1.1</b>	<b>COMPLEMENTARY MATERIALS .....</b>	<b>5</b>
<b>2</b>	<b>TEST SITES.....</b>	<b>5</b>
<b>2.1</b>	<b>TEST FACILITIES.....</b>	<b>5</b>
<b>2.2</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS .....</b>	<b>6</b>
<b>2.3</b>	<b>TRACEABILITY.....</b>	<b>7</b>
<b>2.4</b>	<b>CALIBRATION.....</b>	<b>7</b>
<b>2.5</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>7</b>
<b>2.6</b>	<b>LOCATION OF ORIGINAL DATA .....</b>	<b>7</b>
<b>2.7</b>	<b>STATUS OF FACILITY USED FOR TESTING.....</b>	<b>7</b>
<b>3</b>	<b>GENERAL PRODUCT INFORMATION.....</b>	<b>8</b>
<b>3.1</b>	<b>PRODUCT FUNCTION AND INTENDED USE.....</b>	<b>8</b>
<b>3.2</b>	<b>RATINGS AND SYSTEM DETAILS .....</b>	<b>9</b>
<b>3.3</b>	<b>INDEPENDENT OPERATION MODES .....</b>	<b>10</b>
<b>3.4</b>	<b>NOISE GENERATING AND NOISE SUPPRESSING PARTS.....</b>	<b>10</b>
<b>3.5</b>	<b>SUBMITTED DOCUMENTS.....</b>	<b>10</b>
<b>4</b>	<b>TEST SET-UP AND OPERATION MODES .....</b>	<b>11</b>
<b>4.1</b>	<b>PRINCIPLE OF CONFIGURATION SELECTION.....</b>	<b>11</b>
<b>4.2</b>	<b>TEST OPERATION AND TEST SOFTWARE.....</b>	<b>11</b>
<b>4.3</b>	<b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....</b>	<b>11</b>
<b>4.4</b>	<b>COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....</b>	<b>11</b>
<b>4.5</b>	<b>TEST SETUP DIAGRAM .....</b>	<b>12</b>
<b>5</b>	<b>TEST RESULTS.....</b>	<b>14</b>
<b>5.1</b>	<b>TRANSMITTER REQUIREMENT &amp; TEST SUITES.....</b>	<b>14</b>
<b>5.1.1</b>	<i>Antenna Requirement.....</i>	<i>14</i>
<b>5.1.2</b>	<i>Maximum Conducted Output Power .....</i>	<i>15</i>
<b>5.1.3</b>	<i>Conducted Power Spectral Density.....</i>	<i>18</i>
<b>5.1.4</b>	<i>6dB Bandwidth.....</i>	<i>21</i>
<b>5.1.5</b>	<i>20dB Bandwidth .....</i>	<i>22</i>
<b>5.1.6</b>	<i>99% Bandwidth .....</i>	<i>23</i>
<b>5.1.7</b>	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth .....</i>	<i>24</i>
<b>5.1.8</b>	<i>Radiated Spurious Emission.....</i>	<i>25</i>
<b>5.1.9</b>	<i>Carrier Frequency Separation.....</i>	<i>26</i>
<b>5.1.10</b>	<i>Number of Hopping Frequency.....</i>	<i>27</i>
<b>5.1.11</b>	<i>Time of Occupancy .....</i>	<i>28</i>
<b>5.1.12</b>	<i>Conducted Emission on AC Mains.....</i>	<i>29</i>
<b>6</b>	<b>SAFETY HUMAN EXPOSURE .....</b>	<b>30</b>
<b>6.1</b>	<b>RADIO FREQUENCY EXPOSURE COMPLIANCE.....</b>	<b>30</b>
<b>6.1.1</b>	<i>Electromagnetic Fields .....</i>	<i>30</i>

**Prüfbericht - Nr.: CN22ZW0R 001**  
*Test Report No.*

Seite 4 von 32  
*Page 4 of 32*

<b>7</b>	<b>PHOTOGRAPHS OF THE TEST SET-UP .....</b>	<b>32</b>
<b>8</b>	<b>LIST OF TABLES .....</b>	<b>32</b>

# 1 General Remarks

## 1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up.

Appendix B: Test Results.

# 2 Test Sites

## 2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China

FCC Registration No.: 694916

ISED wireless device testing laboratory: 25069

## 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

TÜV Rheinland (Shenzhen) Co., Ltd.

<b>Radio Spectrum Testing (SRD-Tonscend)</b>				
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal. until</b>
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY60241175	28.09.2022
MXG X-Series RF Vector Signal Generator	Keysight	N5182B	MY61250137	28.09.2022
EXG X-Series Microwave Analog Signal Generator	Keysight	N5173B	MY61250141	28.09.2022
DC Power Supply	Keysight	E3642A	MY61276100	28.09.2022
Wireless Connectivity Tester	R&S	CMW270	102505	28.09.2022
Power Control Unit	Tonscend	JS0806-4ADC	N/A	28.09.2022
Automation Control Unit	Tonscend	JS0806-2	21C8060396	28.09.2022
Test Software	Tonscend	JS1120-3	N/A	N/A
Control PC	Lenovo	TianYi510S-071MB	YLX23JMF	N/A
<b>Unwanted Emission Testing (TS9975)</b>				
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal. until</b>
EMI Test Receiver	R&S	ESR 7	102021	10.08.2022
Signal Analyzer	R&S	FSV 40	101439	09.08.2022
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	09.08.2022
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	09.08.2022
Amplifier	R&S	SCU-18F	180070	09.08.2022
Amplifier	R&S	SCU40A	100475	09.08.2022
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	08.08.2022
Double-Ridged Antenna (1 - 18 GHz)	ETS-LINDGREN	3117	00218717	08.08.2022
Wideband Ridged Horn Antenna (18- 40 GHz)	Steatite	QMS-00880	19067	08.08.2022
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	13.09.2022
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	22.06.2024

<b>Conducted Emission on AC Mains</b>				
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cali. until</b>
EMI Test Receiver	R&S	ESR3	102428	10.08.2022
Artificial Mains Network	R&S	ENV216	102333	10.08.2022
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

## 2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

<b>Parameter</b>	<b>Uncertainty</b>
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	$\pm 2.5$ dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	$\pm 6$ dB
Radiated Emission of Receiver, valid up to 26.5 GHz	$\pm 6$ dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	$\pm 3.70$ dB / $\pm 3.30$ dB

## 2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

## 2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

### 3 General Product Information

#### 3.1 Product Function and Intended Use

The EUT is a WisLink LPWAN Concentrator which supports Lora and GNSS technologies.

This module has five different antennas, the details specifications for these antennas as below:

Antenna #	Model	Antenna Gain	Antenna Type	Connector Type
1#	RAKARG15	8dBi	Fiber Glass Antenna	N-type male connector
2#	RAKARG14	5.8dBi	Fiber Glass Antenna	N-type male connector
3#	RAKARG19	5.1dBi	Fiber Glass Antenna	N-type male connector
4#	RAKARJ14	2.3 dBi	Dipole Antenna	RPSMA connector
5#	RAKARJ16	2.3 dBi	Dipole Antenna	RPSMA connector

Note:

1. When connecting to the module, all antennas listed above need to transfer to an **IPEX connector**.
2. Antennas 1#, 2# and 3# have the same type and similar in-band and out-of-band characteristics, they are considered as equivalent antennas. Thus, the antenna 1# & 3# was selected to be tested.
3. Antennas 4# and 5# # have the same type and similar in-band and out-of-band characteristics, they are considered as equivalent antennas. Thus, the antenna 4# with highest gain was selected to be tested.

Antenna 4# RAKARJ14 is identical with Antenna 5# RAKARJ16 except the color of enclosure different.

Data Rate	Configuration	Indicative physical bit rate [bit/sec]
0	LoRa Modulation: SF10 / Bandwidth 125 kHz	980
1	LoRa Modulation: SF9 / Bandwidth 125 kHz	1760
2	LoRa Modulation: SF8 / Bandwidth 125 kHz	3125
3	LoRa Modulation: SF7 / Bandwidth 125 kHz	5470
4	LoRa Modulation: SF8 / Bandwidth 500 kHz	12500
8	LoRa Modulation: SF12 / Bandwidth 500 kHz	980
9	LoRa Modulation: SF11 / Bandwidth 500 kHz	1760
10	LoRa Modulation: SF10 / Bandwidth 500 kHz	3900
11	LoRa Modulation: SF9 / Bandwidth 500 kHz	7000
12	LoRa Modulation: SF8 / Bandwidth 500 kHz	12500
13	LoRa Modulation: SF7 / Bandwidth 500 kHz	21900

For details refer to the User Manual, Technical Description and Circuit Diagram.



## 3.2 Ratings and System Details

**Table 2: Technical Specification of EUT**

General Information of EUT	Value
Kind of Equipment	WisLink LPWAN Concentrator
Type Designation	RAK5147
Trademark	RAK
FCC ID	2AF6B-RAK5147
IC	25908-RAK5147
HVIN	RAK5147
Operating Voltage	DC 3.3V (Supplied by socket of PCB board)

Technical Specification of Lora DTS	
Operating Frequency	904.6MHz, 923.3 - 927.5MHz
Type of Modulation	Lora
Data Rate	SF8 / DR4 for 904.6MHz SF7 – SF12 / DR8 – DR13 for 923.3 - 927.5MHz
Channel Number	8 channels for 923.3 - 927.5MHz
Occupied Bandwidth	500 KHz
Technical Specification of Lora Hybrid	
Frequency Range	903.9MHz - 905.3MHz
Type of Modulation	Lora
Data Rate	SF7 – SF10 / DR0 – DR3
Channel Number	8 channels
Channel Separation	200 KHz
Occupied Bandwidth	125 KHz

**Table 3: RF Channel and Frequency of Lora DTS**

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
<b>0</b>	<b>904.6</b>	3	924.5	6	926.3
<b>1</b>	<b>923.3</b>	<b>4</b>	<b>925.1</b>	7	926.9
2	923.9	5	925.7	<b>8</b>	<b>927.5</b>

**Table 4: RF Channel and Frequency of Lora Hybrid**

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
<b>0</b>	<b>903.9</b>	2	904.3	4	904.7	6	905.1
1	904.1	<b>3</b>	<b>904.5</b>	5	904.9	<b>7</b>	<b>905.3</b>

### 3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Lora transmitting mode (DTS & Hybrid )
  - 1) Low Channel
  - 2) Middle Channel
  - 3) High Channel
- B. On, Transmitting on Hopping channel (Hybrid )
- C. Off

### 3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

### 3.5 Submitted Documents

- ID Label and Location Info

- User Manual

## 4 Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

**Radio Spectrum:** The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### 4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013 and ANSI C63.4: 2014.

According to clause 3.1, all tests were performed on model RAK5147 with Ant#1, Ant#3 & Ant#4 in this report.

### 4.3 Special Accessories and Auxiliary Equipment

Table 5: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N
Portable Laptop	Lenovo	ThinkPad T480	10Q67059
adapter	RAK	N/A	N/A

### 4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

## 4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

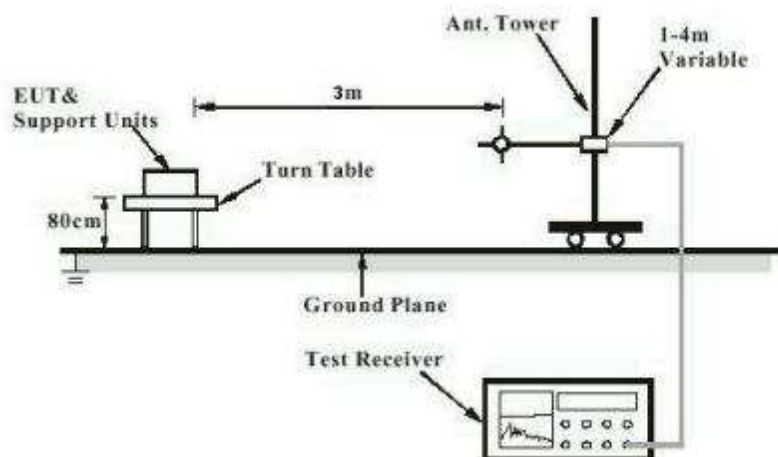


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

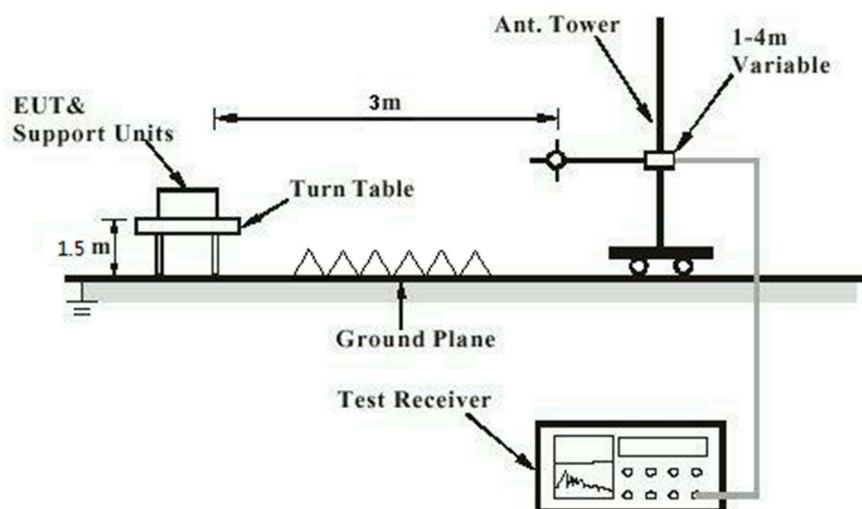


Diagram of Measurement Configuration for Mains Conduction Measurement


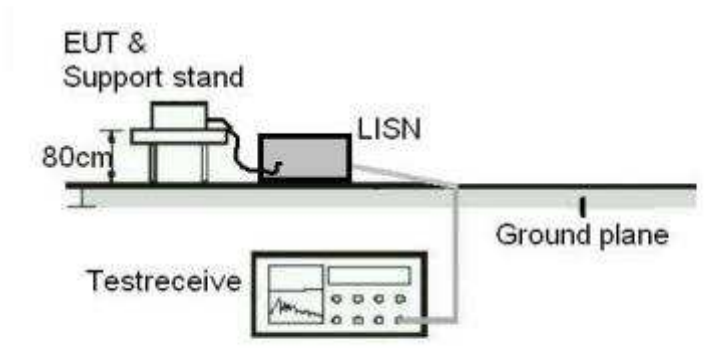


Diagram of Measurement Configuration for Conducted Transmitter Measurement

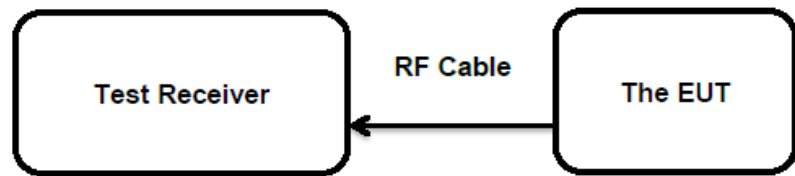

## 5 Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

**RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.247(b)(4) and Part 15.203  
RSS-Gen Clause 6.8

According to the manufacturer declared, the EUT has one external antennas, the maximum directional gain of antenna is 8dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

### 5.1.2 Maximum Conducted Output Power

**RESULT:**
**Pass**
**Test Specification**

Test standard	:	FCC Part 15.247(b)(2)&(3) RSS-247 Clause 5.4(a)&(d)
Basic standard	:	ANSI C63.10: 2013
Limits	:	< 1.0 W (30 dBm) for antenna gain less than 6dBi < 0.631 W (28 dBm) for antenna gain more than 6dBi
Kind of test site	:	Shielded Room

**Test Setup**

Date of testing	:	2022-06-16 to 2022-06-27
Input voltage	:	DC 3.3V
Operation mode	:	A, B
Test channel	:	Low / Middle / High
Ambient temperature	:	25 °C
Relative humidity	:	56 %
Atmospheric pressure	:	101 kPa

For Antenna Gain (2.3dBi) less than 6dBi

**Table 6: Test Result of Maximum Conducted Output Power, Lora DTS**

Test Mode	Test Channel (MHz)	Measured Conducted Power		Limit
		(dBm)	(W)	
Lora DTS SF7	923.3	26.68	0.4656	< 1.0 W (30 dBm)
	925.1	26.59	0.4560	
	927.5	26.51	0.4477	
Lora DTS SF12	923.3	26.84	0.4831	
	925.1	26.77	0.4753	
	927.5	26.43	0.4395	
Lora DTS SF8	904.6	26.85	0.4842	
<b>Max. Measured Value</b>		26.85	0.4842	

**Table 7: Test Result of Maximum Conducted Output Power, Lora Hybrid**

Test Mode	Test Channel (MHz)	Measured Conducted Power		Limit (W)
		(dBm)	(W)	
Lora Hybrid SF7	903.9	19.93	0.0984	< 1.0 W (30 dBm)
	904.5	20.05	0.1012	
	905.3	20.14	0.1033	
Lora Hybrid SF9	903.9	21.34	0.1361	
	904.5	21.43	0.1390	
	905.3	21.69	0.1476	
Lora Hybrid SF10	903.9	19.84	0.0964	
	904.5	20.02	0.1005	
	905.3	20.21	0.1050	
<b>Max. Measured Value</b>		21.69	0.1476	

Note:

- 1) The cable loss is taken into account in results.
- 2) Maximum Antenna gain(G) : 2.3 dBi,  
Maximum e.i.r.p.=29.15dBm = 0.822W, which is far below the 4 W

For Antenna Gain (5.1dBi) less than 6dBi

**Table 8: Test Result of Maximum Conducted Output Power, Lora DTS**

Test Mode	Test Channel (MHz)	Measured Conducted Power		Limit
		(dBm)	(W)	
Lora DTS SF7	923.3	25.88	0.3873	< 1.0 W (30 dBm)
	925.1	25.79	0.3793	
	927.5	25.71	0.3724	
Lora DTS SF12	923.3	26.04	0.4018	
	925.1	25.97	0.3954	
	927.5	25.63	0.3656	
Lora DTS SF8	904.6	26.05	0.4027	
<b>Max. Measured Value</b>		26.05	0.4027	

**Table 9: Test Result of Maximum Conducted Output Power, Lora Hybrid**

Test Mode	Test Channel (MHz)	Measured Conducted Power		Limit (W)
		(dBm)	(W)	
Lora Hybrid SF7	903.9	19.93	0.0984	< 1.0 W (30 dBm)
	904.5	20.05	0.1012	
	905.3	20.14	0.1033	
Lora Hybrid SF9	903.9	21.34	0.1361	
	904.5	21.43	0.1390	
	905.3	21.69	0.1476	
Lora Hybrid SF10	903.9	19.84	0.0964	
	904.5	20.02	0.1005	
	905.3	20.21	0.1050	
<b>Max. Measured Value</b>		21.69	0.1476	

Note:

- 3) The cable loss is taken into account in results.
- 4) Maximum Antenna gain(G) : 5.1 dBi,  
Maximum e.i.r.p.=31.15dBm = 1.303W, which is far below the 4 W



For Antenna Gain (8dBi) more than 6dBi

**Table 10: Test Result of Maximum Conducted Output Power, Lora DTS**

Test Mode	Test Channel (MHz)	Measured Conducted Power		Limit
		(dBm)	(W)	
Lora DTS SF7	923.3	23.03	0.2009	< 0.631 W (28 dBm)
	925.1	23.12	0.2051	
	927.5	22.54	0.1795	
Lora DTS SF12	923.3	22.14	0.1637	
	925.1	22.91	0.1954	
	927.5	22.42	0.1746	
Lora DTS SF8	904.6	22.89	0.1945	
<b>Max. Measured Value</b>		23.12	0.2051	

**Table 11: Test Result of Maximum Conducted Output Power, Lora Hybrid**

Test Mode	Test Channel (MHz)	Measured Conducted Power		Limit (W)
		(dBm)	(W)	
Lora Hybrid SF7	903.9	18.02	0.0634	< 0.631 W (28 dBm)
	904.5	18.24	0.0667	
	905.3	18.28	0.0673	
Lora Hybrid SF9	903.9	19.88	0.0973	
	904.5	19.95	0.0989	
	905.3	20.10	0.1023	
Lora Hybrid SF10	903.9	17.97	0.0627	
	904.5	18.10	0.0646	
	905.3	18.26	0.0670	
<b>Max. Measured Value</b>		20.10	0.1023	

Note:

5) The cable loss is taken into account in results.

6) Maximum Antenna gain(G) : 8 dBi,

Maximum e.i.r.p.=31.12dBm = 1.294W, which is far below the 4 W

### 5.1.3 Conducted Power Spectral Density

**RESULT:**
**Pass**
**Test Specification**

Test standard : FCC Part 15.247(e), FCC Part 15.247(f)  
                   : RSS-247 Clause 5.2(b), RSS-247 Clause 5.3  
 Basic standard : ANSI C63.10: 2013  
 Limits : < 8 dBm / 3kHz for antenna gain less than 6dBi  
           : < 6 dBm / 3kHz for antenna gain 8dBi  
 Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2022-06-16 to 2022-06-27  
 Input voltage : DC 3.3V  
 Operation mode : B  
 Test channel : Low / Middle / High  
 Ambient temperature : 25 °C  
 Relative humidity : 56 %  
 Atmospheric pressure : 101 kPa

For Antenna Gain (2.3dBi) less than 6dBi
--

**Table 12: Test Result of Maximum Power Spectral Density, Lora DTS**

Test Mode	Test Channel (MHz)	Measured Power Spectral Density (dBm/3KHz)
Lora DTS SF7	923.3	7.52
	925.1	7.36
	927.5	7.49
Lora DTS SF12	923.3	7.41
	925.1	7.26
	927.5	7.51
Lora DTS SF8	904.6	6.81
Maximum Measured Value		7.52

**Table 13: Test Result of Maximum Power Spectral Density, Lora Hybrid**

Test Mode	Test Channel (MHz)	Measured Power Spectral Density (dBm/3KHz)
Lora Hybrid SF7	903.9	7.03
	904.5	7.15
	905.3	7.52
Lora Hybrid SF9	903.9	7.02
	904.5	7.53
	905.3	7.28
Lora Hybrid SF10	903.9	7.27
	904.5	7.14
	905.3	7.46
<b>Maximum Measured Value</b>		<b>7.53</b>

For Antenna Gain (5.1dBi) less than 6dBi

**Table 14: Test Result of Maximum Power Spectral Density, Lora DTS**

Test Mode	Test Channel (MHz)	Measured Power Spectral Density (dBm/3KHz)
Lora DTS SF7	923.3	6.88
	925.1	6.72
	927.5	6.85
Lora DTS SF12	923.3	6.77
	925.1	6.62
	927.5	6.87
Lora DTS SF8	904.6	6.17
<b>Maximum Measured Value</b>		<b>6.88</b>

**Table 15: Test Result of Maximum Power Spectral Density, Lora Hybrid**

Test Mode	Test Channel (MHz)	Measured Power Spectral Density (dBm/3KHz)
Lora Hybrid SF7	903.9	7.03
	904.5	7.15
	905.3	7.52
Lora Hybrid SF9	903.9	7.02
	904.5	7.53
	905.3	7.28
Lora Hybrid SF10	903.9	7.27
	904.5	7.14
	905.3	7.46
<b>Maximum Measured Value</b>		<b>7.53</b>

For Antenna Gain (8dBi) more than 6dBi
--

**Table 16: Test Result of Maximum Power Spectral Density, Lora DTS**

Test Mode	Test Channel (MHz)	Measured Power Spectral Density (dBm/3KHz)
Lora DTS SF7	923.3	3.24
	925.1	3.49
	927.5	2.86
Lora DTS SF12	923.3	3.78
	925.1	3.82
	927.5	3.63
Lora DTS SF8	904.6	3.02
<b>Maximum Measured Value</b>		<b>3.82</b>

**Table 17: Test Result of Maximum Power Spectral Density, Lora Hybrid**

Test Mode	Test Channel (MHz)	Measured Power Spectral Density (dBm/3KHz)
Lora Hybrid SF7	903.9	5.13
	904.5	5.34
	905.3	5.27
Lora Hybrid SF9	903.9	5.48
	904.5	5.44
	905.3	5.36
Lora Hybrid SF10	903.9	4.61
	904.5	4.87
	905.3	4.94
<b>Maximum Measured Value</b>		<b>5.48</b>

### 5.1.4 6dB Bandwidth

**RESULT:**
**Pass**
**Test Specification**

Test standard : FCC Part 15.247(a)(2)  
                   : RSS-247 Clause 5.2(a)  
 Basic standard : ANSI C63.10: 2013  
 Limits : At least 500kHz for bandwidth(DTS)  
 Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2022-06-21  
 Input voltage : DC 3.3V  
 Operation mode : B  
 Test channel : Low / Middle / High  
 Ambient temperature : 25 °C  
 Relative humidity : 56 %  
 Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

**Table 18: Test Result of 6dB Bandwidth, Lora DTS**

Test Mode	Test Channel (MHz)	6dB Bandwidth (KHz)	Limit (MHz)
Lora DTS SF7	923.3	579.0	>500KHz
	925.1	578.0	
	927.5	580.0	
Lora DTS SF12	923.3	620.0	
	925.1	616.0	
	927.5	617.0	
Lora DTS SF8	904.6	604.0	
<b>Minimum Measured Value</b>		578.0	

### 5.1.5 20dB Bandwidth

**RESULT:**
**Pass**
**Test Specification**

Test standard	: FCC Part 15.247(a)(1) (i) RSS-247 Clause 5.1(a)
Basic standard	: ANSI C63.10: 2013 Not more than 500kHz and
Limits	: < 250KHz for at least 50 hopping frequencies >=250KHz for at least 25 hopping frequencies
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: 2022-06-20
Input voltage	: DC 3.3V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

**Table 19: Test Result of 20dB Bandwidth, Lora Hybrid**

Test Mode	Channel Frequency (MHz)	20dB Bandwidth (kHz)	Limit (MHz)
Lora Hybrid SF7	903.9	120.68	<500KHz
	904.5	120.58	
	905.3	120.63	
Lora Hybrid SF9	903.9	124.17	
	904.5	124.14	
	905.3	124.13	
Lora Hybrid SF10	903.9	123.99	
	904.5	124.00	
	905.3	123.92	
<b>Maximum Measured Value</b>		124.17	

### 5.1.6 99% Bandwidth

**RESULT:**
**Pass**
**Test Specification**

Test standard : RSS-Gen Clause 6.7  
 Basic standard : ANSI C63.10: 2013  
 Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2022-06-21  
 Input voltage : DC 3.3V  
 Operation mode : A, B  
 Test channel : Low / Middle / High  
 Ambient temperature : 25 °C  
 Relative humidity : 56 %  
 Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

**Table 20: Test Result of 99% Bandwidth, Lora DTS**

Test Mode	Test Channel (MHz)	99% Bandwidth (KHz)	Limit (MHz)
Lora DTS SF7	923.3	472.88	/
	925.1	472.07	
	927.5	475.06	
Lora DTS SF12	923.3	500.01	
	925.1	500.21	
	927.5	501.09	
Lora DTS SF8	904.6	485.15	
<b>Maximum Measured Value</b>		501.09	

**Table 21: Test Result of 99% Bandwidth, Lora Hybrid**

Test Mode	Test Channel (MHz)	99% Bandwidth (KHz)	Limit (MHz)
Lora Hybrid SF7	903.9	120.65	/
	904.5	120.64	
	905.3	120.48	
Lora Hybrid SF9	903.9	124.18	
	904.5	124.15	
	905.3	124.07	
Lora Hybrid SF10	903.9	123.97	
	904.5	123.99	
	905.3	123.96	
<b>Maximum Measured Value</b>		124.18	

### 5.1.7 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(d) RSS-247 Clause 5.5
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: Refer to test result
Input voltage	: DC 3.3V
Operation mode	: A, B
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix B.



## 5.1.8 Radiated Spurious Emission

**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.247(d) & FCC Part 15.205 RSS-247 Clause 3.3
Basic standard	:	ANSI C63.10: 2013
Limits	:	Refer to 15.209(a) of FCC part 15.247(d)
Kind of test site	:	3m Semi-anechoic Chamber

**Test Setup**

Date of testing	:	2022-06-16 to 2022-06-21
Input voltage	:	DC 3.3V
Operation mode	:	A, B
Test channel	:	Low / Middle / High
Ambient temperature	:	Refer to test result
Relative humidity	:	Refer to test result
Atmospheric pressure	:	101 kPa

**Remark:**

Testing was carried out within frequency range 9kHz to the tenth harmonics with all data rate and three channels (Lowest, middle and highest). Only the worst case spurious emissions configuration of the each mode were reported.

Radiated spurious emissions were performed on the EUT with antenna in three orthogonal orientations and only the worst ( antenna vertical) orientations was recorded.

For the measurement records, refer to the appendix B.





### 5.1.11 Time of Occupancy

**RESULT:**
**Pass**
**Test Specification**

Test standard : FCC part 15.247(f)  
                   : RSS-247 Clause 5.3  
 Basic standard : ANSI C63.10: 2013  
 Limits : < 0.4s  
 Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2022-06-21  
 Input voltage : DC 3.3V  
 Operation mode : C  
 Test channel : Low / Middle / High  
 Ambient temperature : 25 °C  
 Relative humidity : 56 %  
 Atmospheric pressure : 101 kPa

**Table 24: Test result of Channel Occupancy**

Test Mode	Period (s)	Channel Occupancy Time (ms)	Limit (ms)
Lora Hybrid (FHSS SF7)	20	38.40	400
Lora Hybrid (FHSS SF9)	20	124.4	400
Lora Hybrid (FHSS SF10)	20	246.7	400

**5.1.12 Conducted Emission on AC Mains****RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.207(a) RSS-Gen Clause 8.8
Basic standard	:	ANSI C63.10: 2013
Frequency range	:	0.15 – 30MHz
Limits	:	FCC Part 15.207(a) RSS-Gen Table 3
Kind of test site	:	Shielded Room

**Test Setup**

Date of testing	:	2022-06-16
Input voltage	:	Powered by Adapter
Operation mode	:	A, B
Earthing	:	Not connected
Ambient temperature	:	24.4 °C
Relative humidity	:	53.6 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix B.

## 6 Safety Human Exposure

### 6.1 Radio Frequency Exposure Compliance

#### 6.1.1 Electromagnetic Fields

**RESULT:****Pass****Test Specification**

Test standard : CFR47 FCC Part 2: Section 2.1091  
CFR47 FCC Part 1: Section 1.1310  
FCC KDB Publication 447498 v06  
FCC KDB Publication 865664 D02 v01r02  
OET Bulletin 65 (Edition 97-01)  
RSS-102 Issue 5 February 2021

**This module has five different antennas, and the maximum e.r.i.p. configuration be evaluated as below:**

**FCC requirement:** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 20cm normally can be maintained between the user and the device.

**MPE Calculation Method according to OET Bulletin 65**

Power Density:  $S_{(mW/cm^2)} = PG/4\pi R^2$  or  $EIRP/4\pi R^2$

Where:

S = power density (mW/cm<sup>2</sup>)

P = power input to the antenna (mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (cm)

**The worst-case mode (the configuration having highest EIRP) specified:**

Lora DTS: 26.05 dBm with 5.1 dBi antenna gain

From the peak RF output power, the minimum mobile separation distance, d=20 cm, the RF power density can be calculated as below:

For Lora DTS:  $S_{(mW/cm^2)} = PG/4\pi R^2 = 0.259$  mW/cm<sup>2</sup>

**Limits for Maximum Permissible Exposure (MPE) according to FCC Part 1.1310:** 0.6026 mW/cm<sup>2</sup>

➤ **IC requirements:** The EUT shall comply with the requirement of RSS-102 section 2.5.2.

#### **Exemption from Routine Evaluation Limits – RF Exposure Evaluation**

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $1.31 \times 10^{-2} f^{0.6834}$  W (adjusted for tune-up tolerance), where  $f$  is in MHz;

- RF exposure evaluation exempted power for Lora Hybrid & DTS: 1.37 W

#### **The worst-case mode (the configuration having highest EIRP) specified:**

Lora DTS: 26.05 dBm

Antenna Gain: 5.1 dBi

The Max. e.i.r.p. for Lora DTS: 31.15dBm = 1.303 W

Both e.i.r.p. for the Lora FHSS and Lora DTS are less than the RF exposure evaluation exempted power. So RF exposure evaluation is not required.

**“RF Radiation Exposure Statement Caution: This Transmitter must be installed to provide a separation distance of at least 20 cm from all persons.”**

## 7 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

## 8 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Technical Specification of EUT .....	9
Table 3: RF Channel and Frequency of Lora DTS.....	9
Table 4: RF Channel and Frequency of Lora Hybrid.....	9
Table 5: Auxiliary Equipment Used during Test.....	11
Table 6: Test Result of Maximum Conducted Output Power, Lora DTS.....	15
Table 7: Test Result of Maximum Conducted Output Power, Lora Hybrid .....	15
Table 8: Test Result of Maximum Conducted Output Power, Lora DTS.....	16
Table 9: Test Result of Maximum Conducted Output Power, Lora Hybrid .....	16
Table 10: Test Result of Maximum Conducted Output Power, Lora DTS.....	17
Table 11: Test Result of Maximum Conducted Output Power, Lora Hybrid .....	17
Table 12: Test Result of Maximum Power Spectral Density, Lora DTS.....	18
Table 13: Test Result of Maximum Power Spectral Density, Lora Hybrid .....	19
Table 14: Test Result of Maximum Power Spectral Density, Lora DTS.....	19
Table 15: Test Result of Maximum Power Spectral Density, Lora Hybrid .....	19
Table 16: Test Result of Maximum Power Spectral Density, Lora DTS.....	20
Table 17: Test Result of Maximum Power Spectral Density, Lora Hybrid .....	20
Table 18: Test Result of 6dB Bandwidth, Lora DTS.....	21
Table 19: Test Result of 20dB Bandwidth, Lora Hybrid.....	22
Table 20: Test Result of 99% Bandwidth, Lora DTS .....	23
Table 21: Test Result of 99% Bandwidth, Lora Hybrid.....	23
Table 22: Test Result of Carrier Frequency Separation .....	26
Table 23: Test result of hopping channel number .....	27
Table 24: Test result of Channel Occupancy .....	28



## Appendix B: Test Results

<b>APPENDIX B: TEST RESULTS</b> .....	<b>1</b>
<b>APPENDIX B.1: 6dB BANDWIDTH</b> .....	<b>2</b>
<i>Lora DTS SF8</i> .....	2
<i>Lora DTS SF7</i> .....	2
<i>Lora DTS SF12</i> .....	4
<b>APPENDIX B.2: 20dB BANDWIDTH</b> .....	<b>6</b>
<i>Lora Hybrid SF7</i> .....	6
<i>Lora Hybrid SF9</i> .....	7
<i>Lora Hybrid SF10</i> .....	9
<b>APPENDIX B.3: 99% BANDWIDTH</b> .....	<b>11</b>
<i>Lora DTS SF8</i> .....	11
<i>Lora DTS SF7</i> .....	11
<i>Lora DTS SF12</i> .....	13
<i>Lora Hybrid SF7</i> .....	14
<i>Lora Hybrid SF9</i> .....	16
<i>Lora Hybrid SF10</i> .....	17
<b>APPENDIX B.4: CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH</b> .....	<b>19</b>
<i>Lora DTS SF8</i> .....	19
<i>Lora DTS SF7</i> .....	20
<i>Lora DTS SF12</i> .....	23
<b>APPENDIX B.5: CARRIER FREQUENCY SEPARATION</b> .....	<b>26</b>
<i>Lora Hybrid SF7</i> .....	26
<i>Lora Hybrid SF9</i> .....	27
<i>Lora Hybrid SF10</i> .....	29
<b>APPENDIX B.6: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS</b> .....	<b>31</b>
<i>Lora DTS SF7 with 8 dBi antenna</i> .....	31
<i>Lora DTS SF8 with 8 dBi antenna</i> .....	45
<i>Lora DTS SF12 with 8 dBi antenna</i> .....	51
<i>Lora DTS SF7 with 2.3dBi antenna</i> .....	55
<i>Lora DTS SF8 with 2.3dBi antenna</i> .....	59
<b>APPENDIX B.7: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS</b> .....	<b>63</b>

### Appendix B.1: 6dB Bandwidth

#### Lora DTS SF8 904.6MHz



#### Lora DTS SF7 Low Channel



### Middle Channel



### High Channel



### Lora DTS SF12

#### Low Channel



#### Middle Channel




### High Channel




## Appendix B.2: 20dB Bandwidth

### Lora Hybrid SF7

#### Low Channel

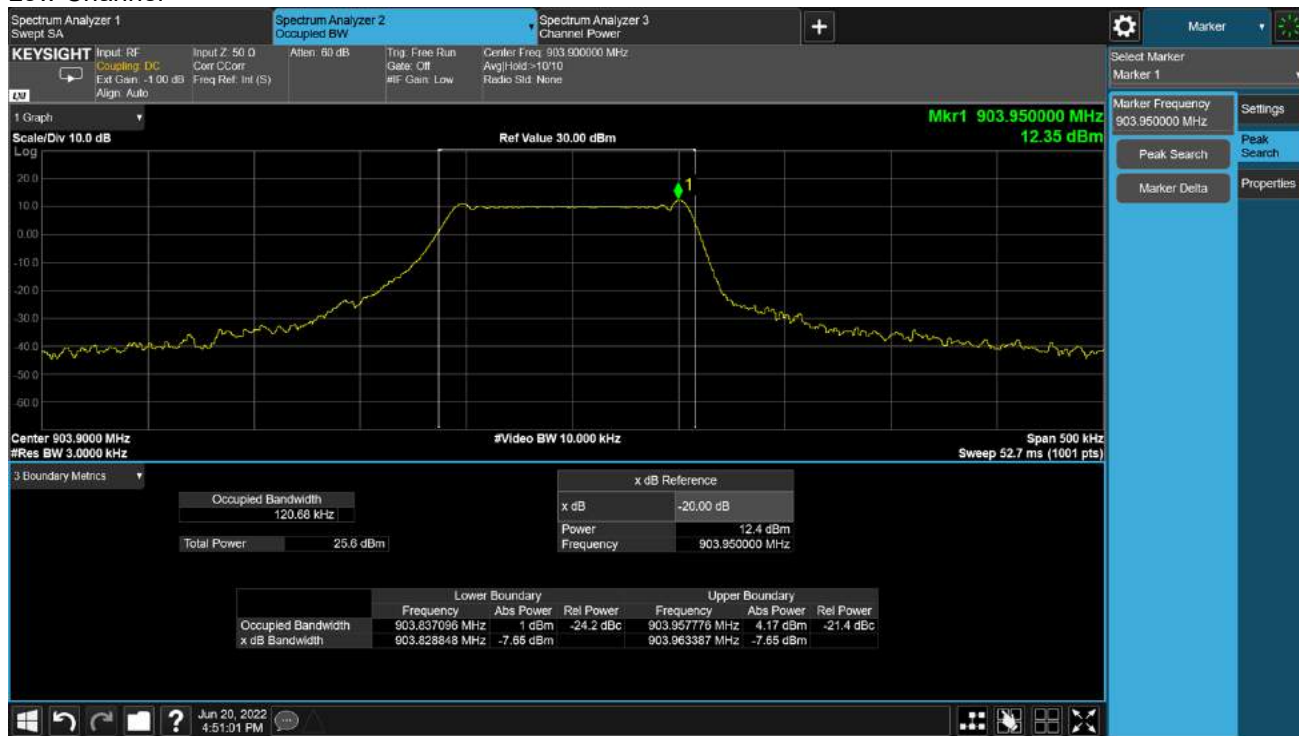

#### Middle Channel

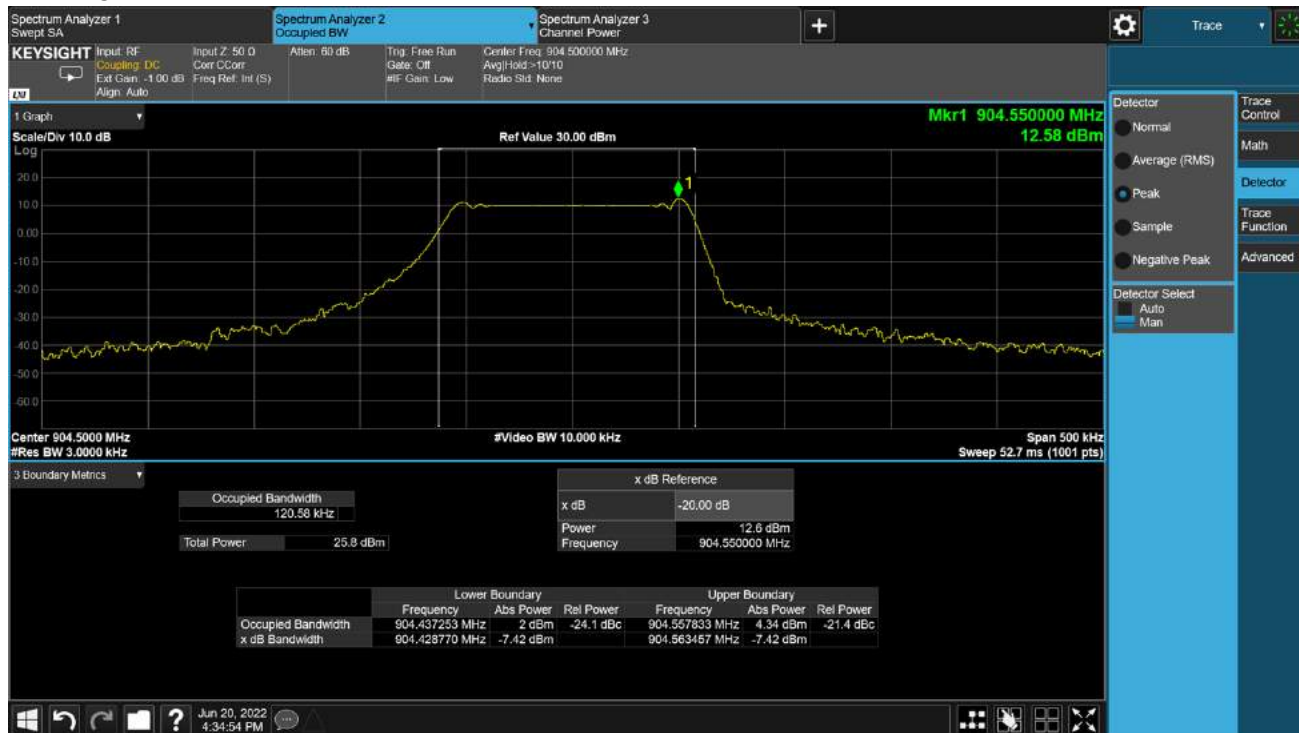


### High Channel




### Lora Hybrid SF9

#### Low Channel

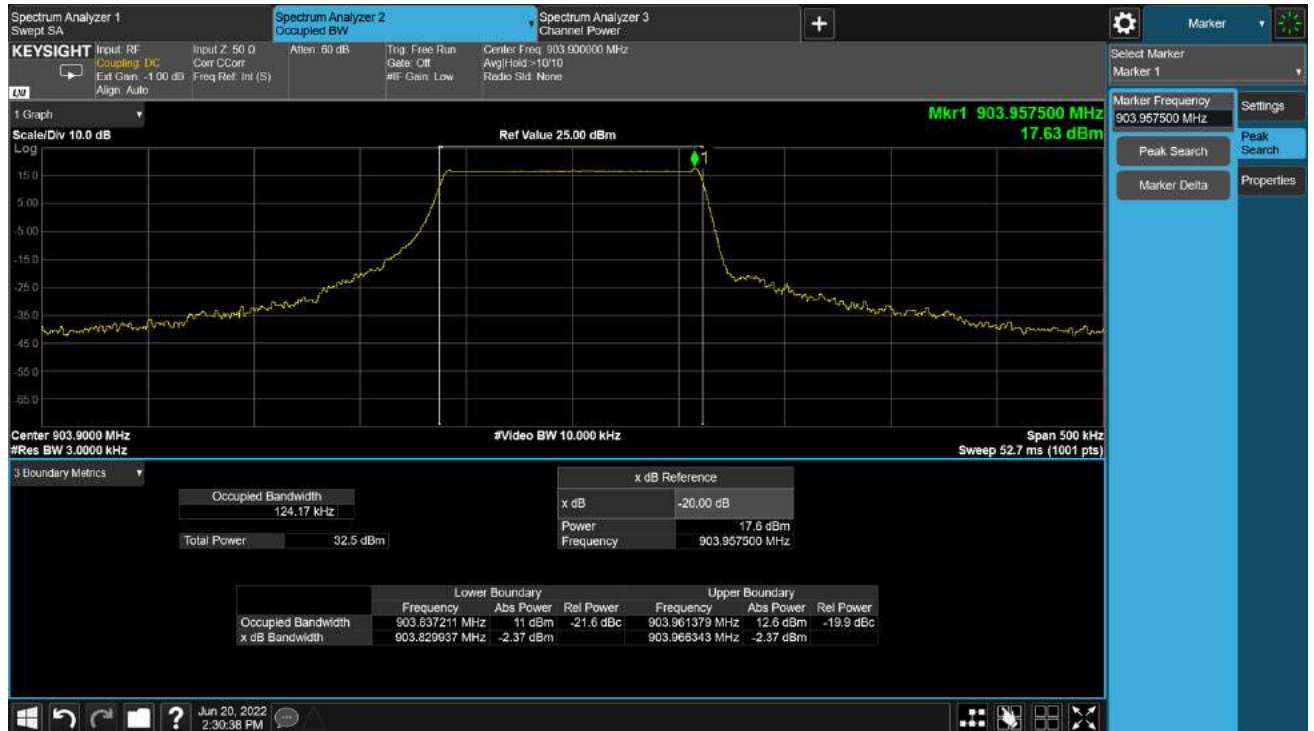

### Middle Channel

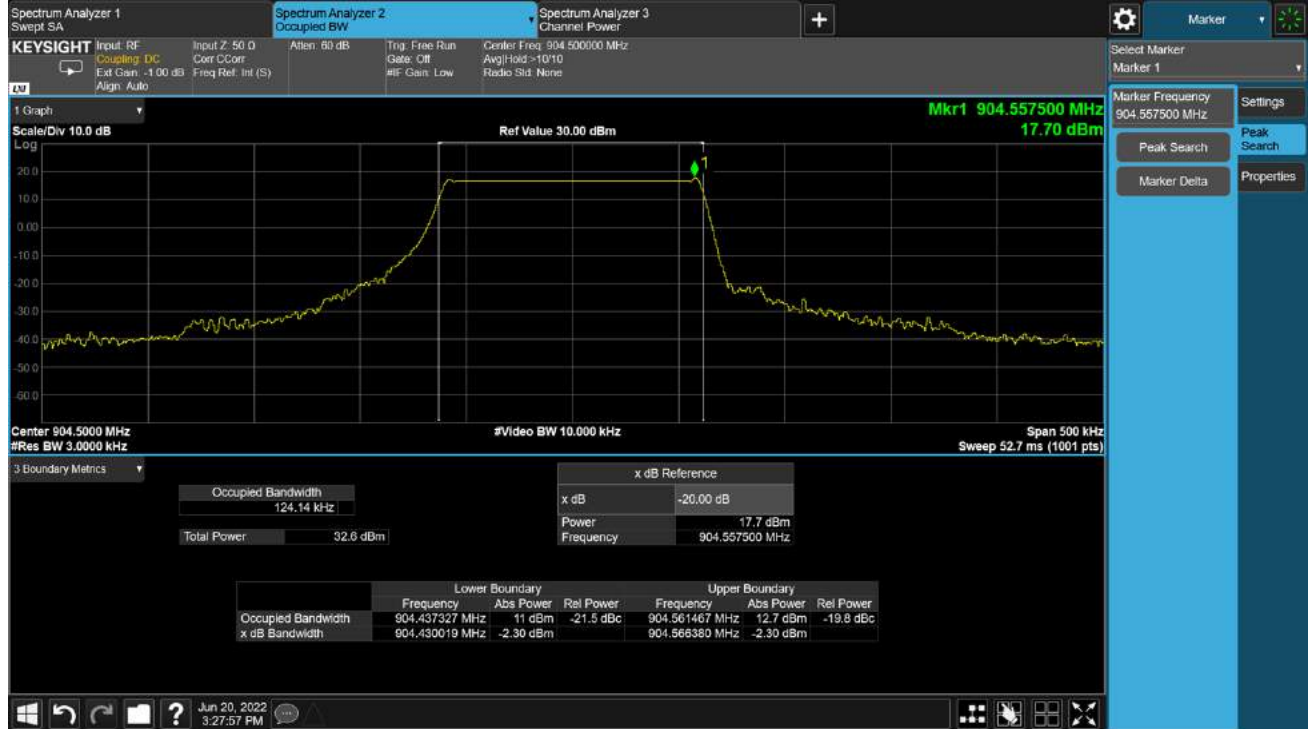


### High Channel






### Lora Hybrid SF10 Low Channel

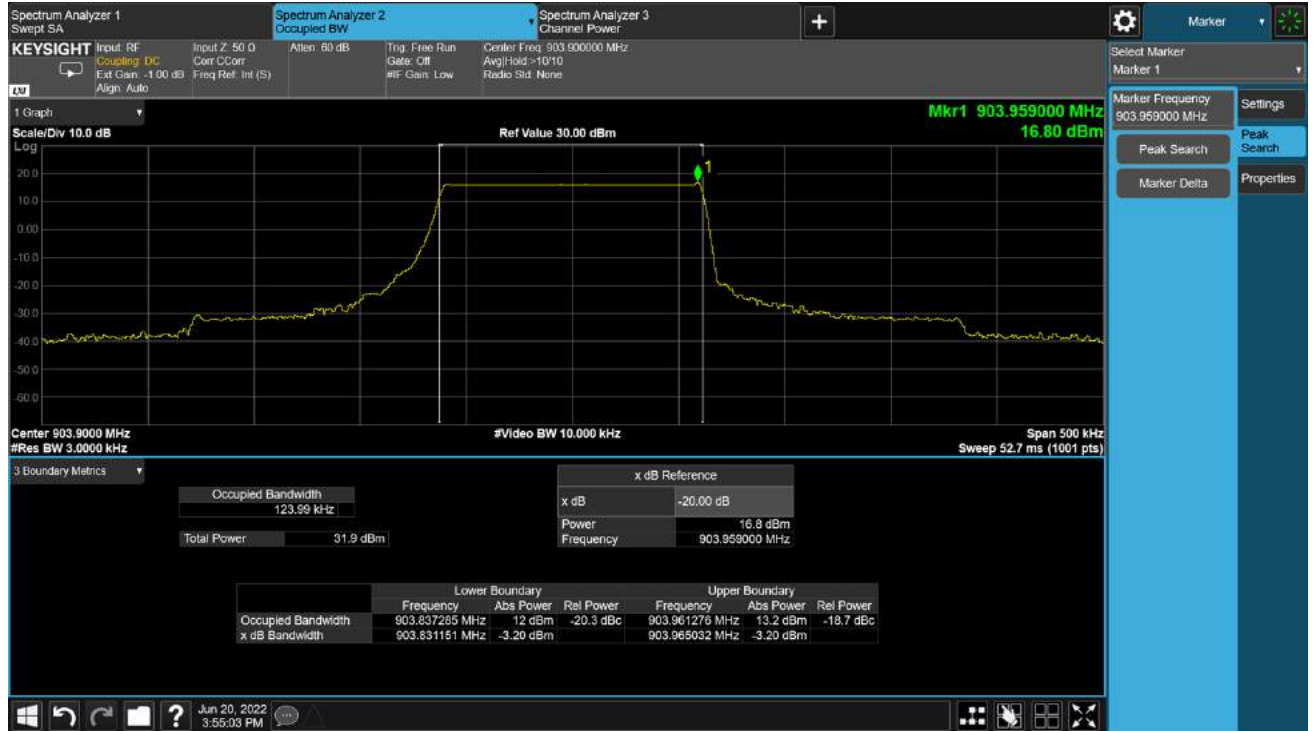

### Middle Channel

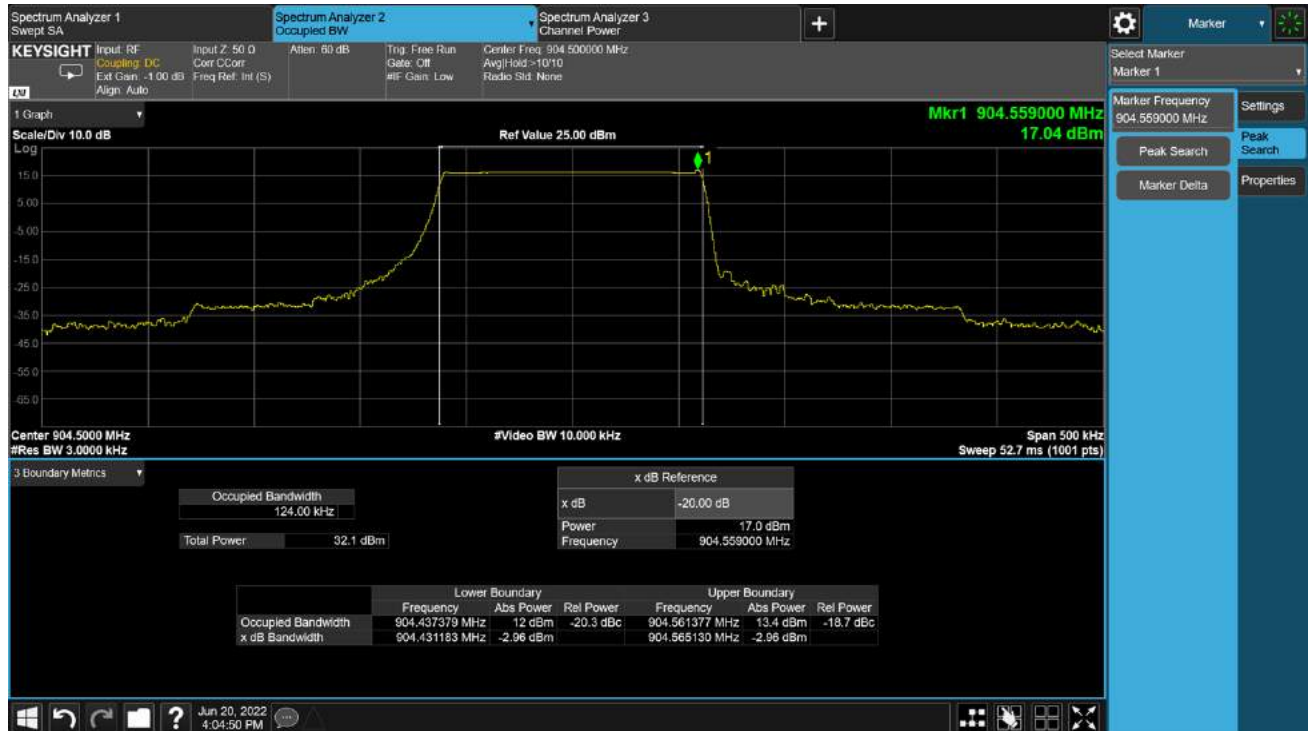


### High Channel




### Appendix B.3: 99% Bandwidth

#### Lora DTS SF8 904.6MHz

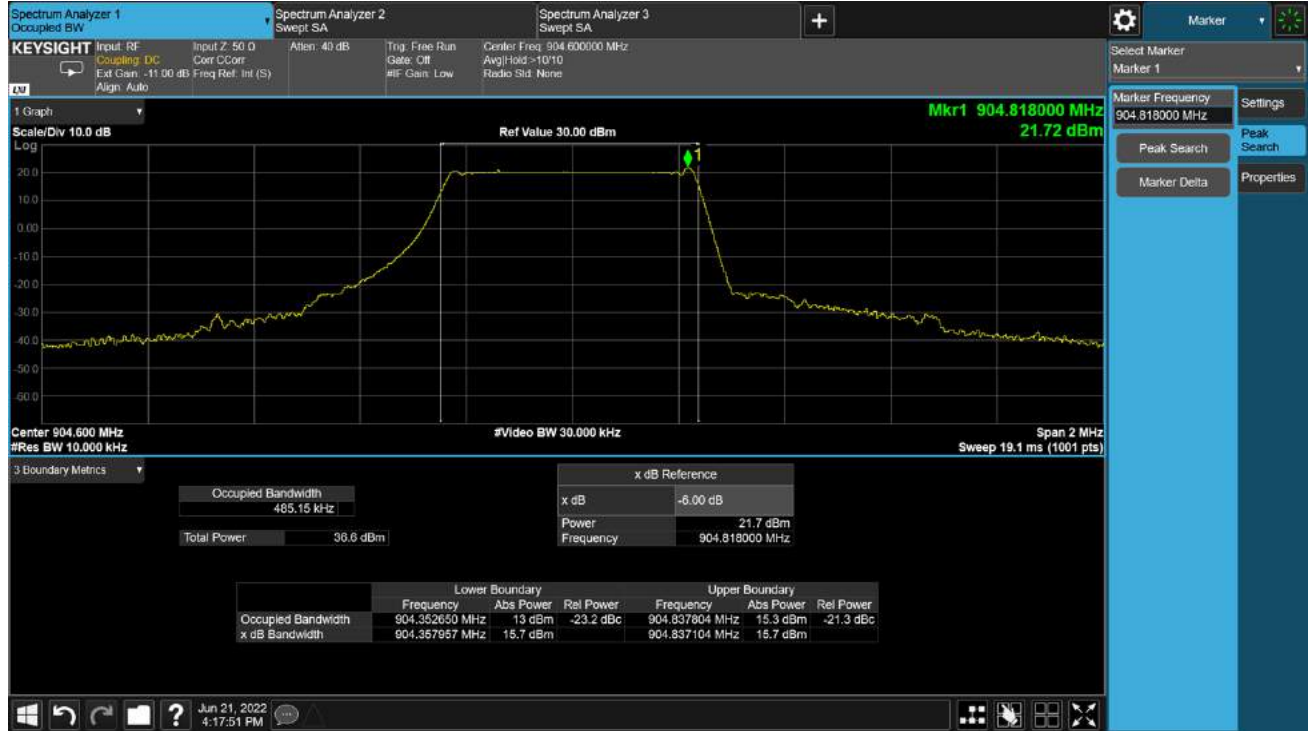

#### Lora DTS SF7 Low Channel

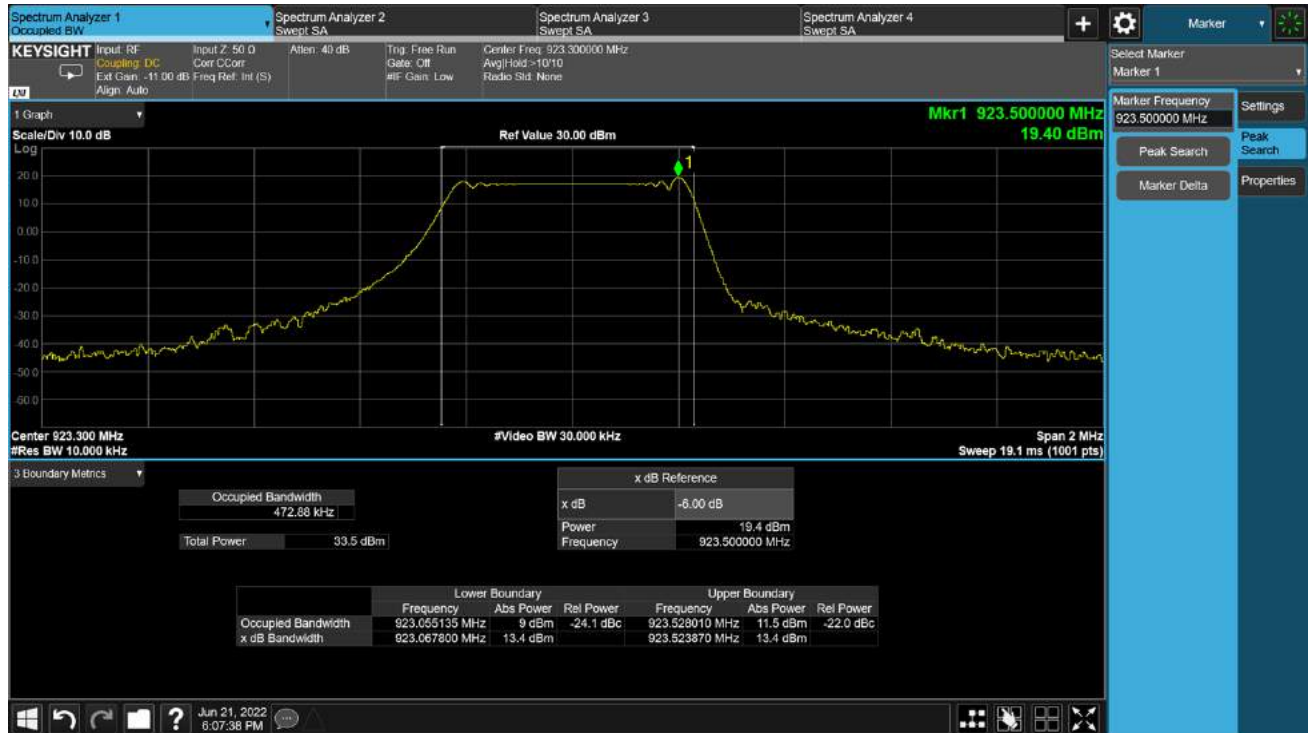

### Middle Channel



### High Channel




Lora DTS SF12  
Low Channel



Middle Channel




### High Channel

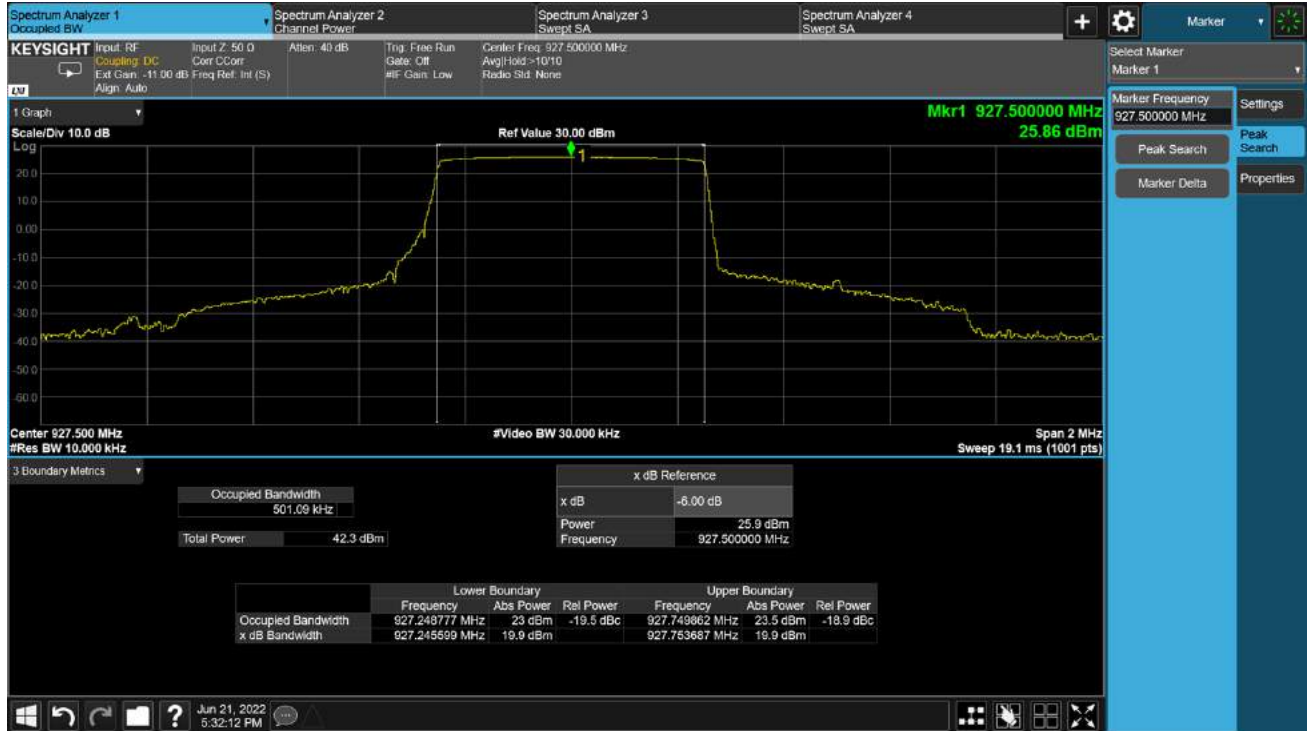


### Lora Hybrid SF7


#### Low Channel

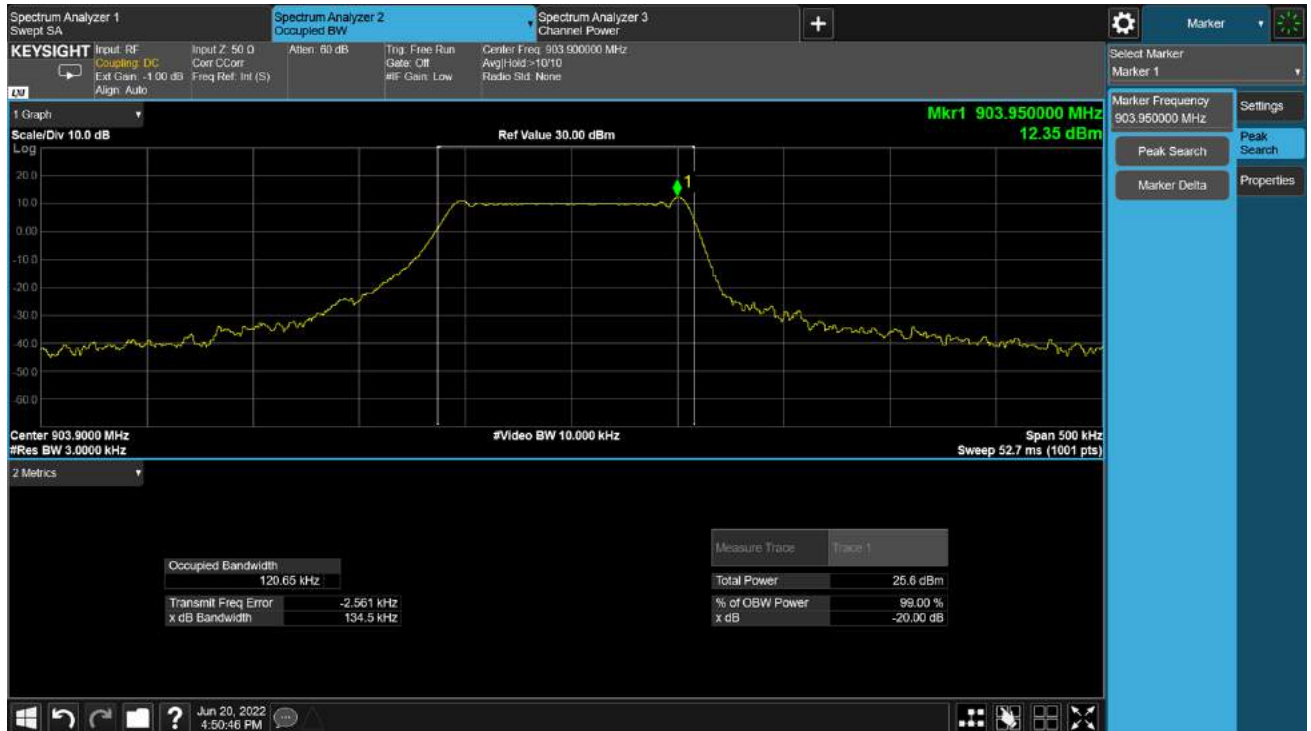


### Middle Channel

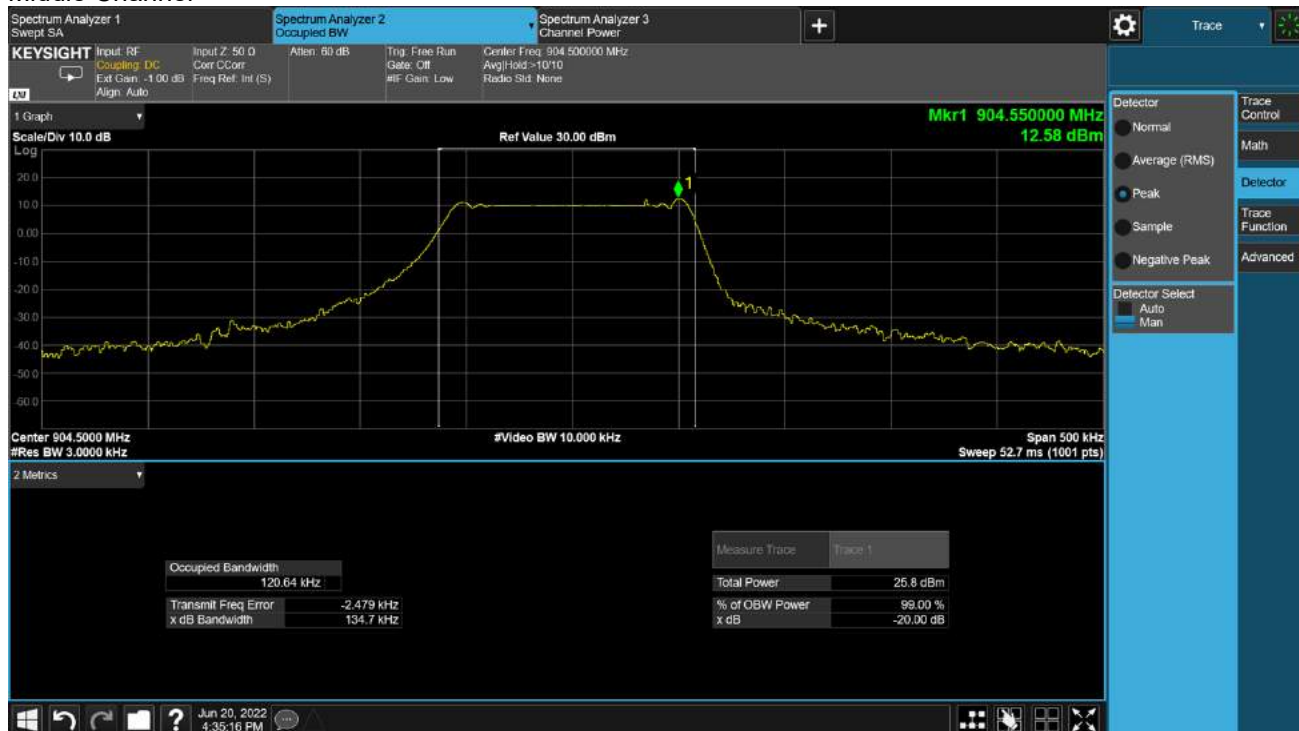

### High Channel

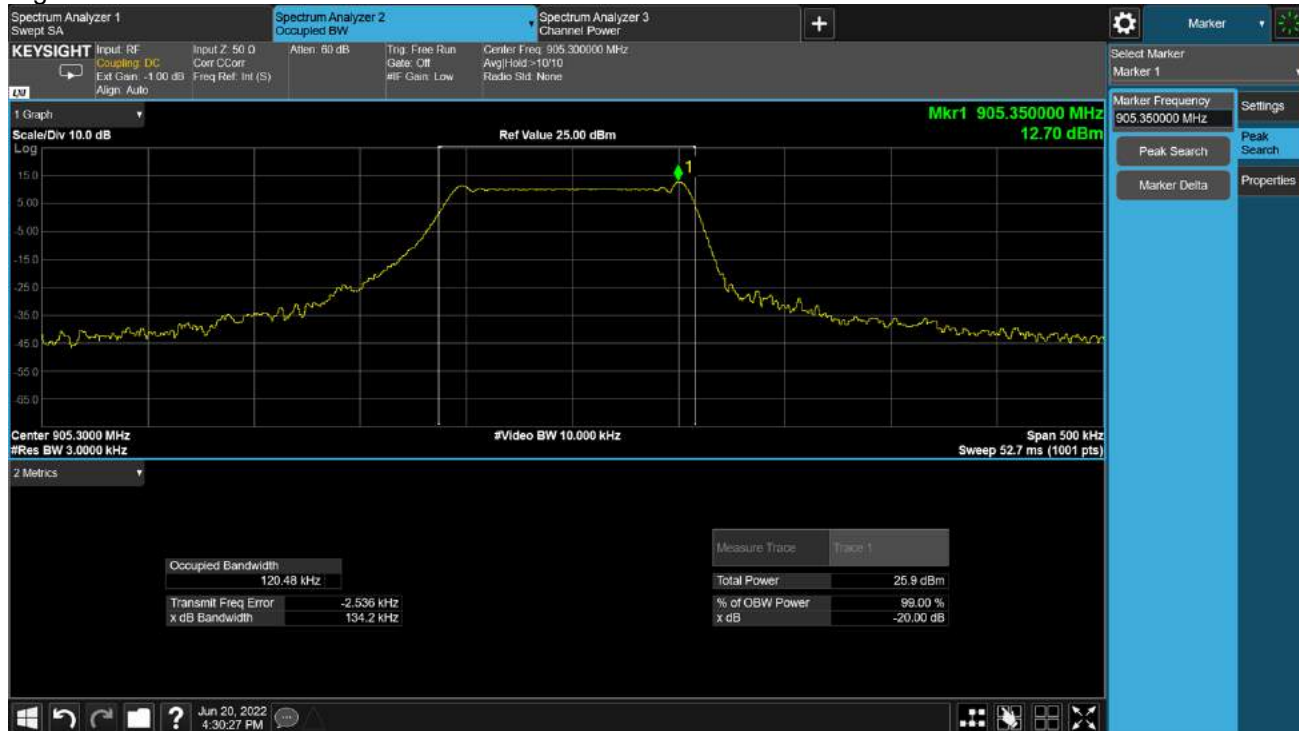

### Lora Hybrid SF9 Low Channel

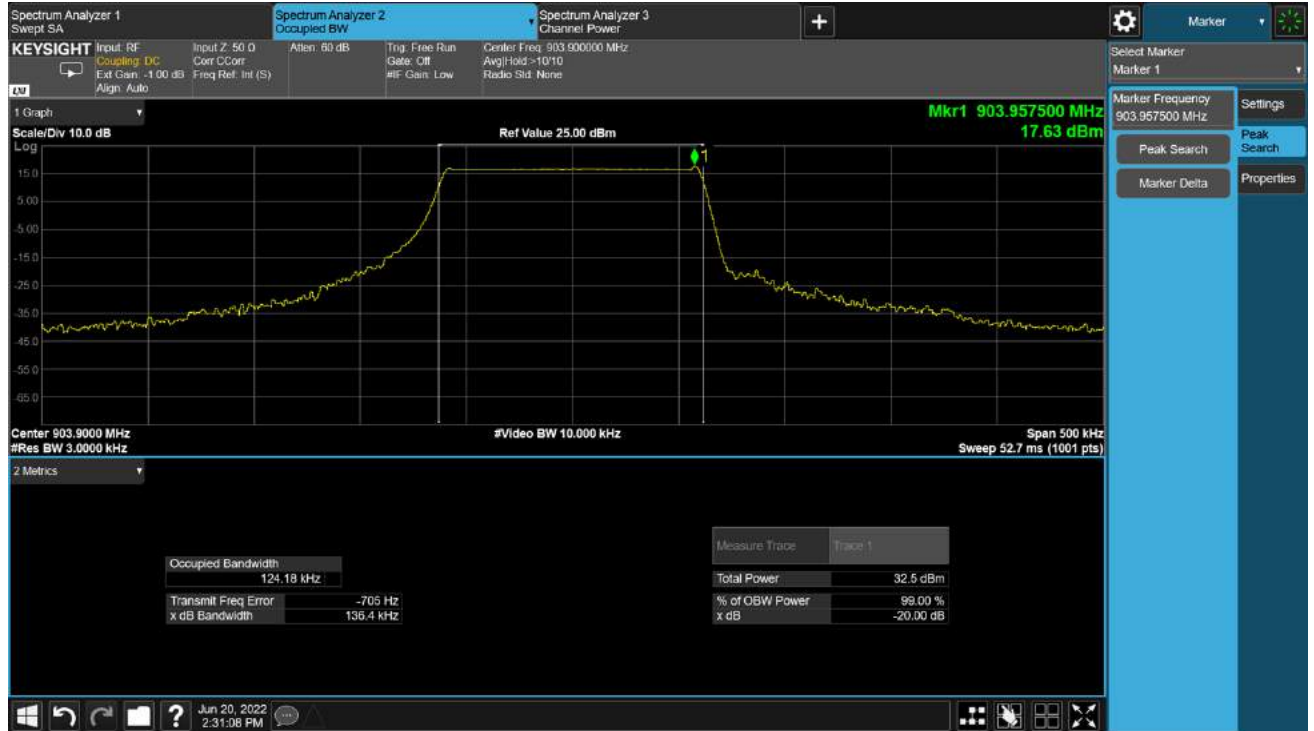


### Middle Channel






### High Channel

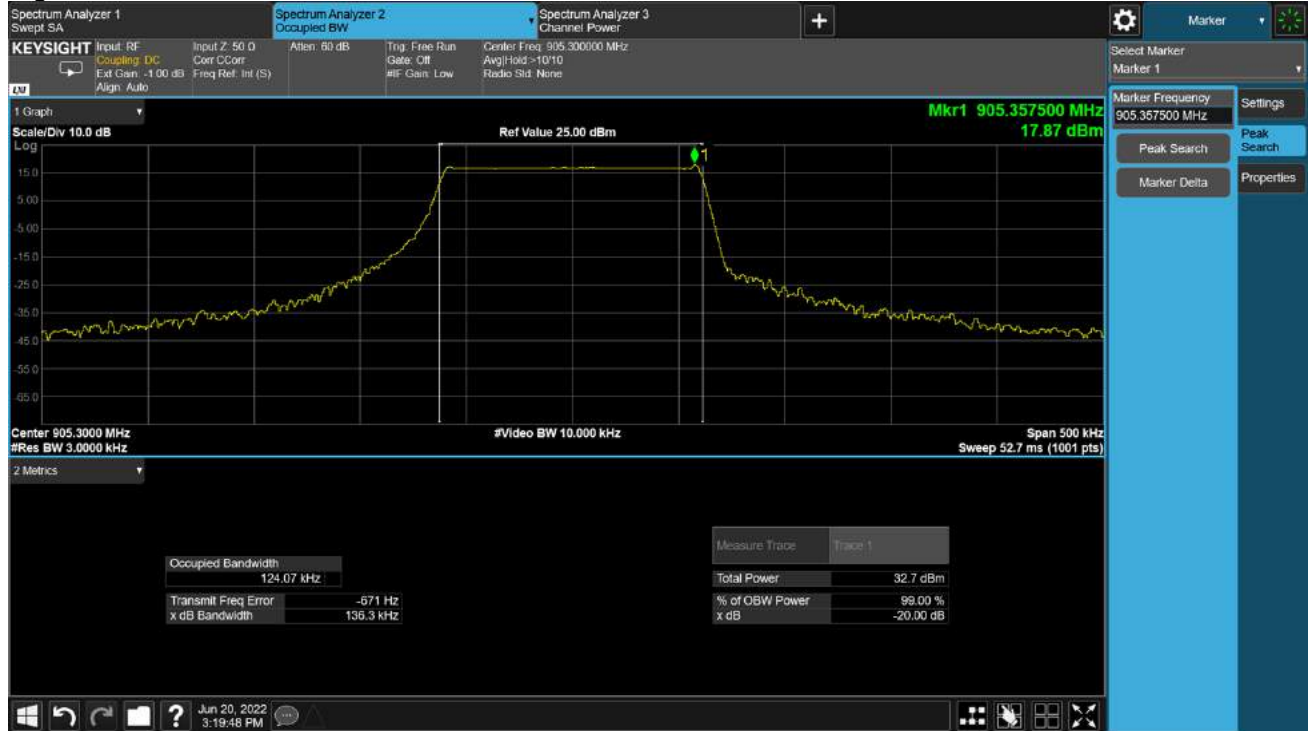


### Lora Hybrid SF10

#### Low Channel

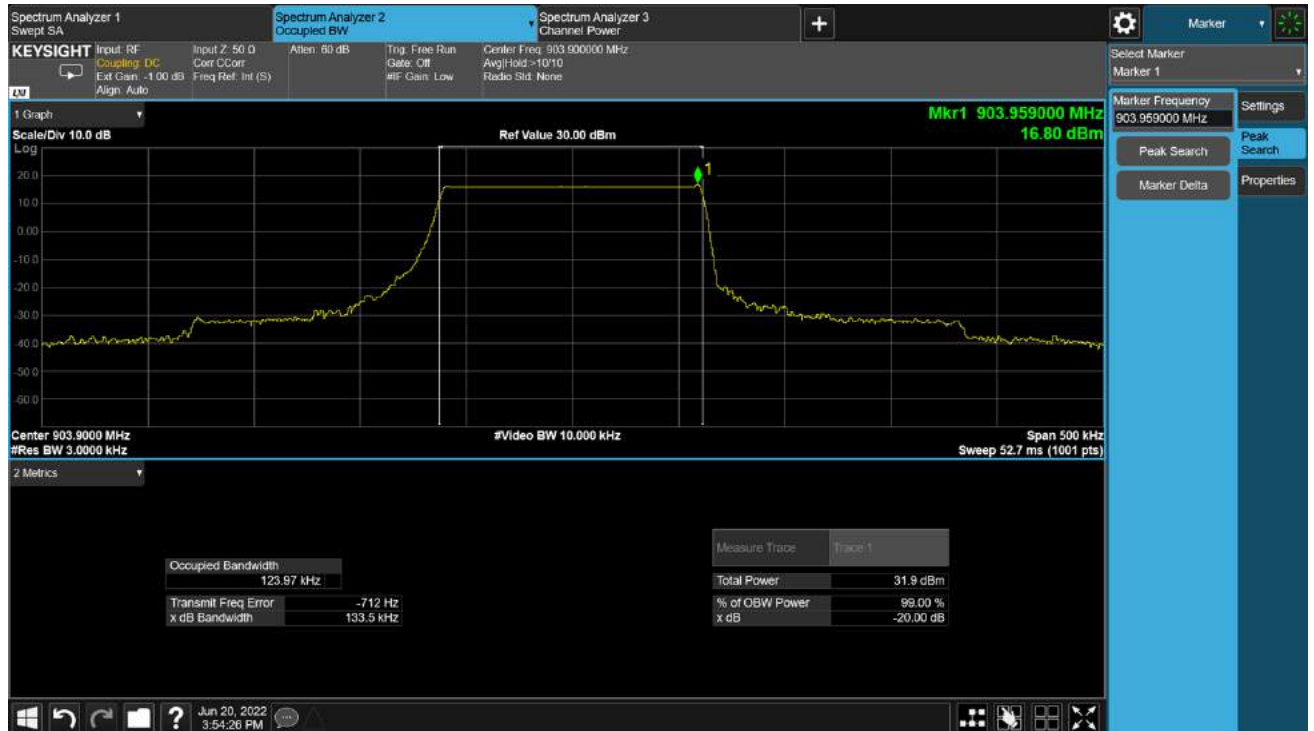

Middle Channel


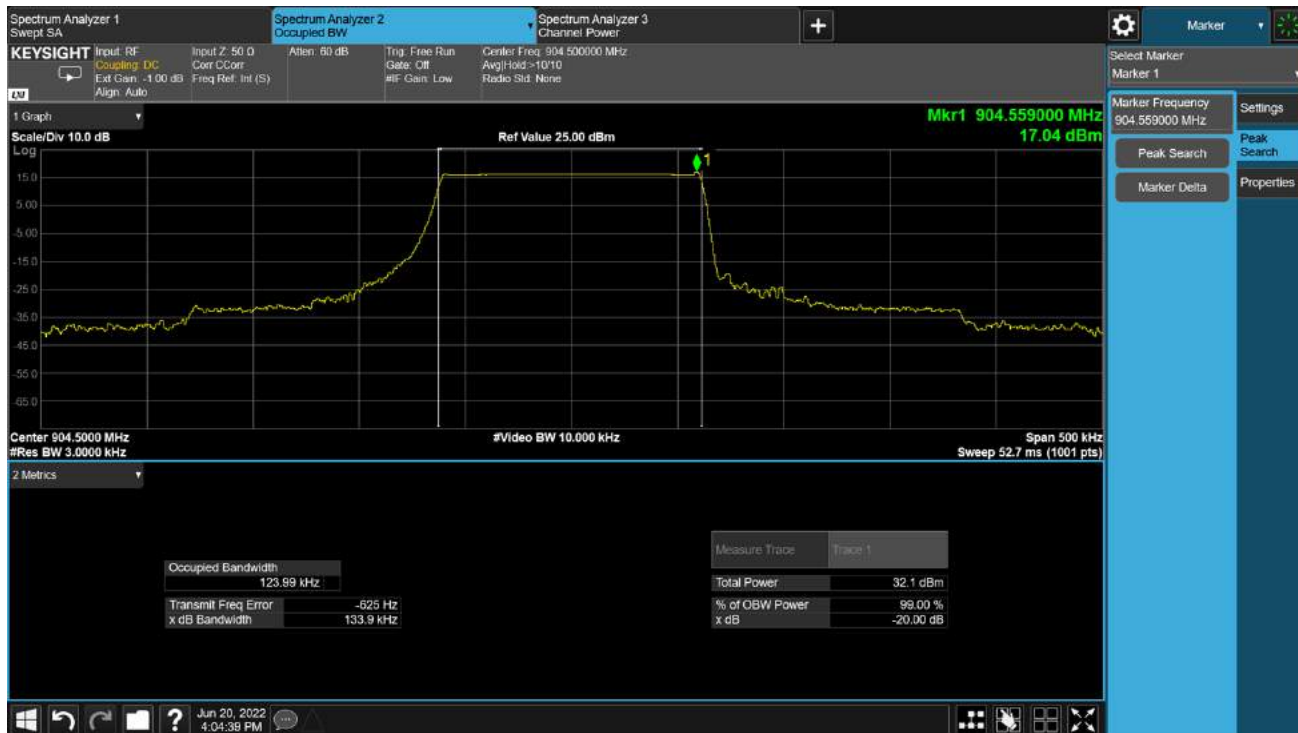


High Channel





### Appendix B.4: Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Lora DTS SF8  
904.6MHz

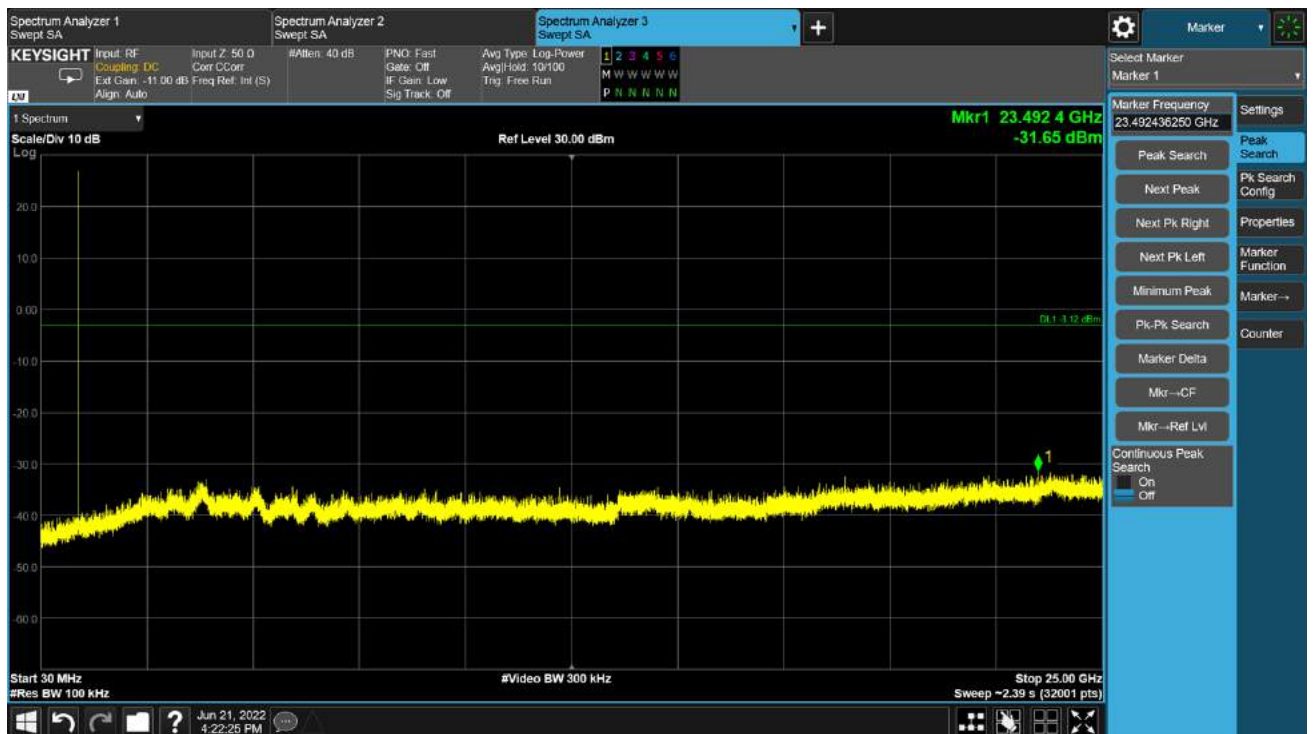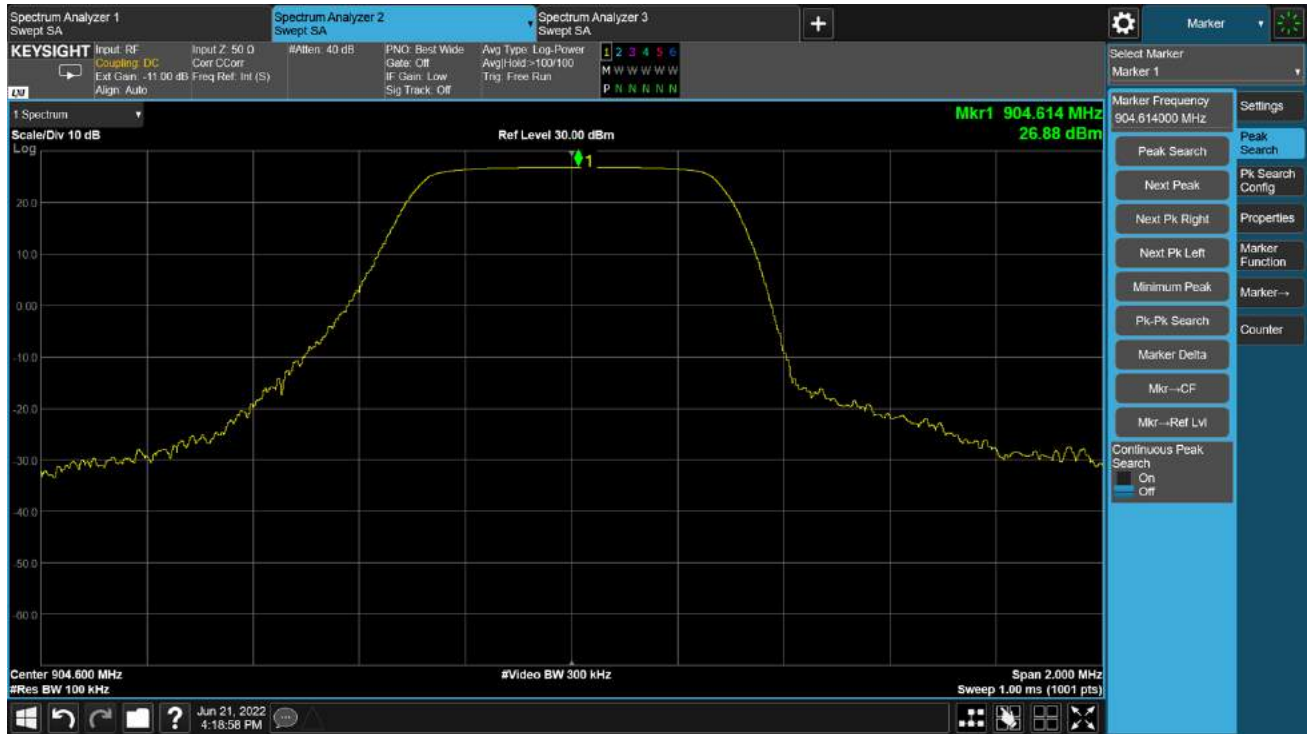


### Lora DTS SF7


#### Low Channel

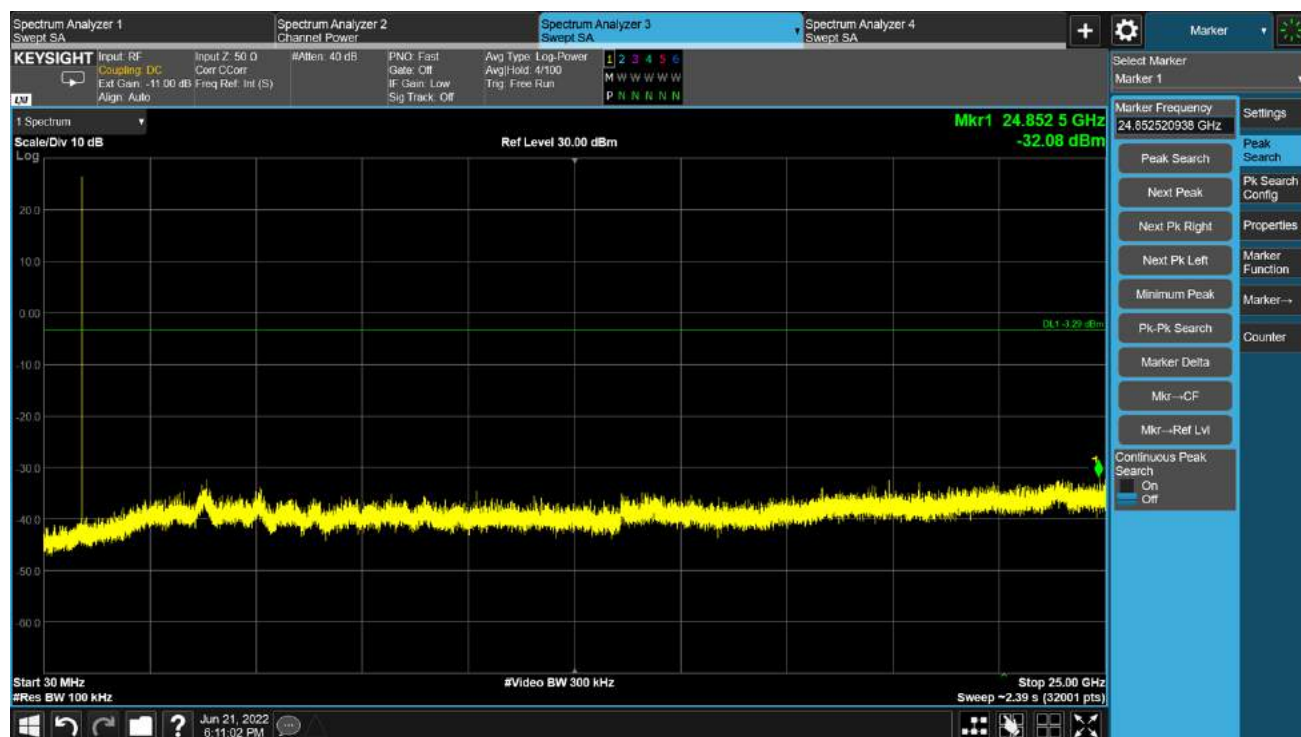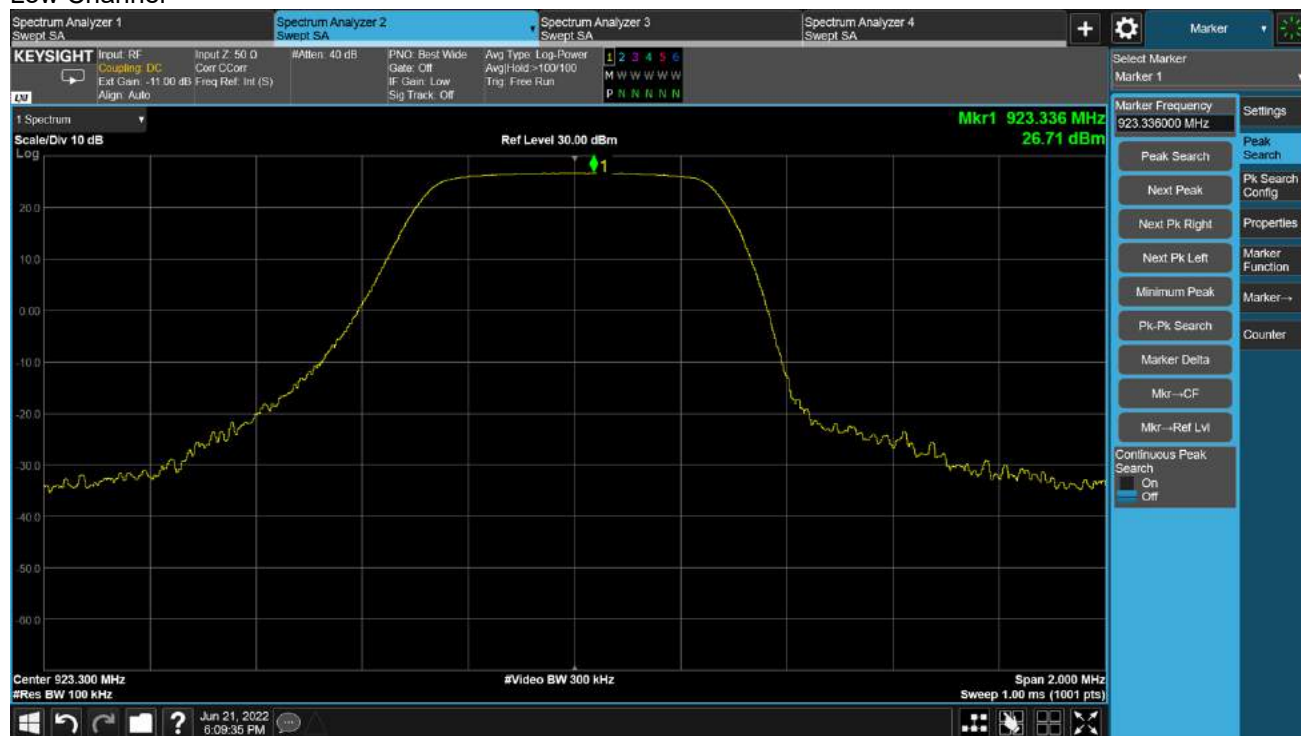

Middle Channel


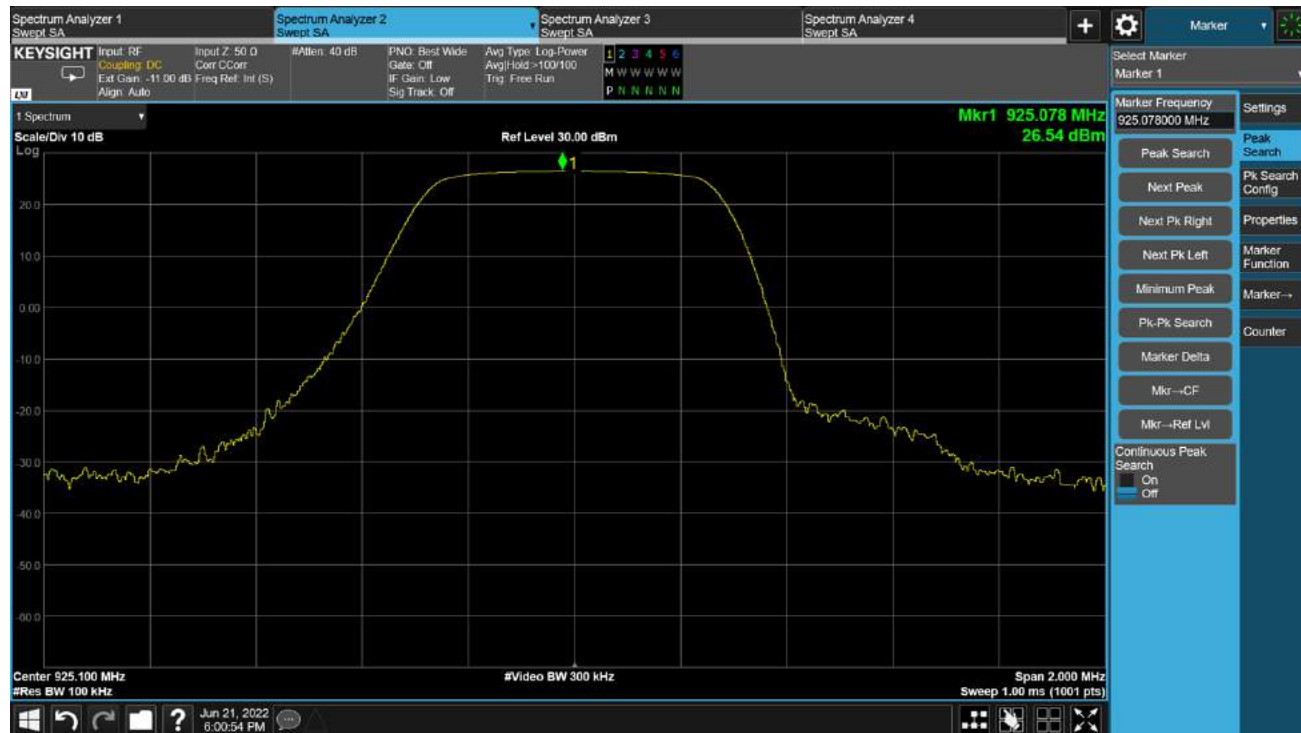


### High Channel


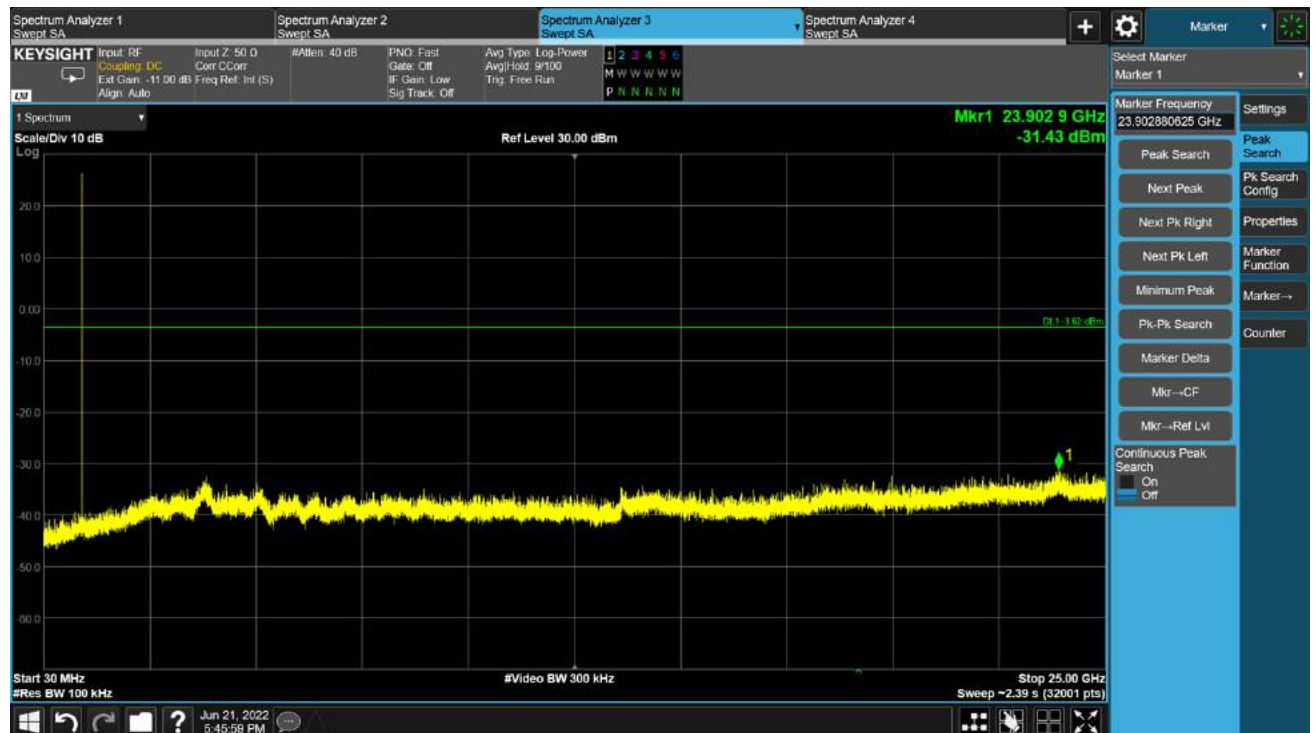


### Lora DTS SF12

### Low Channel

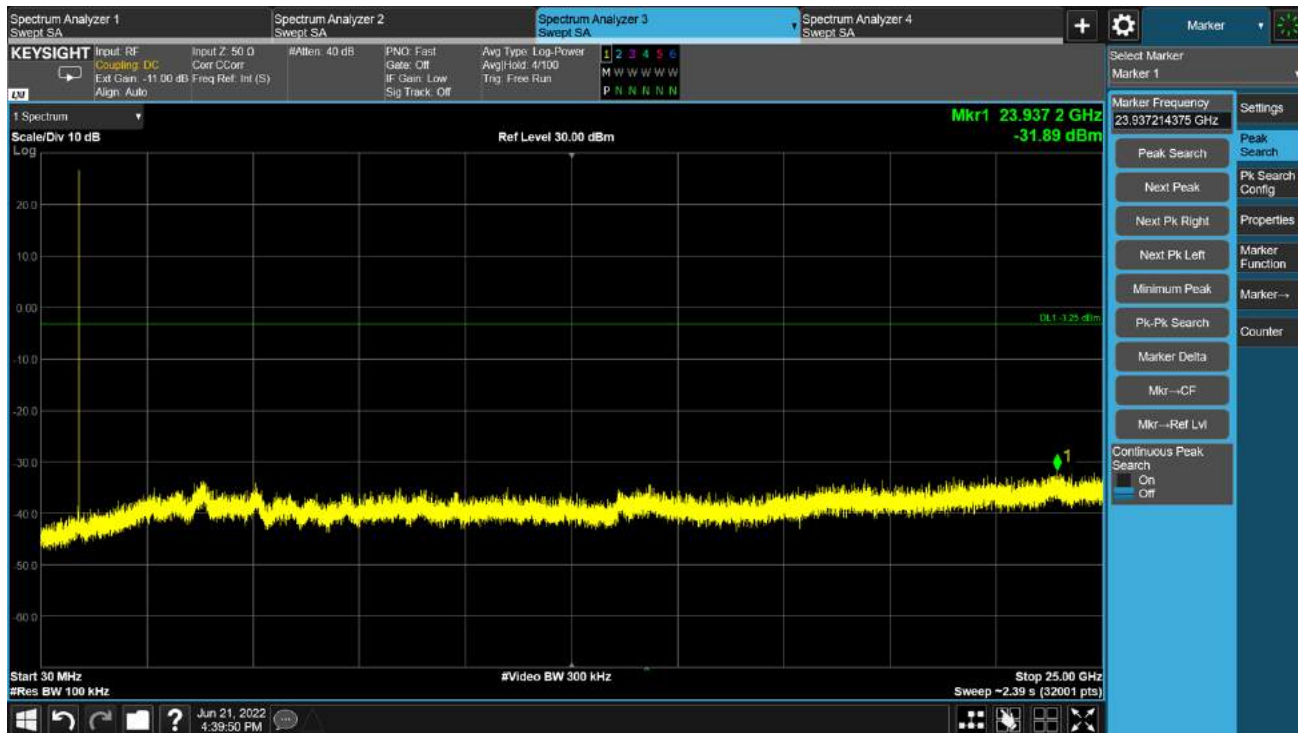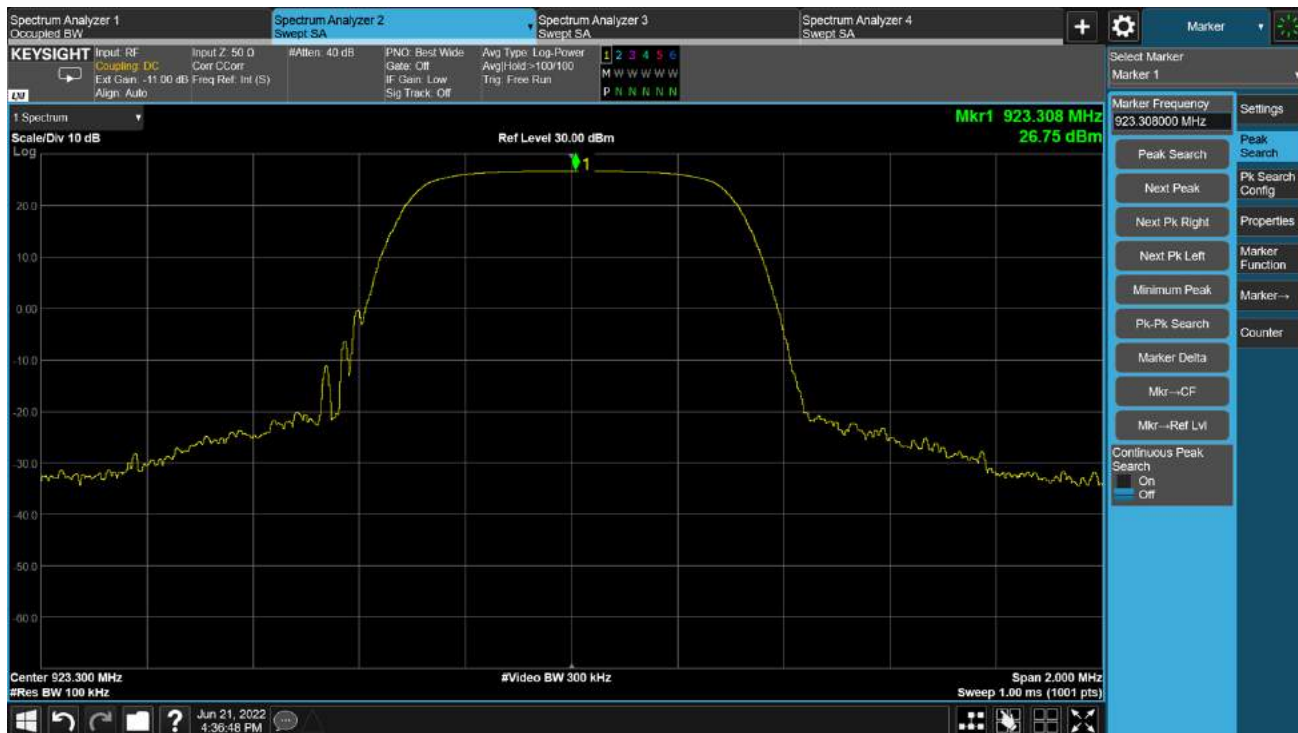


Middle Channel

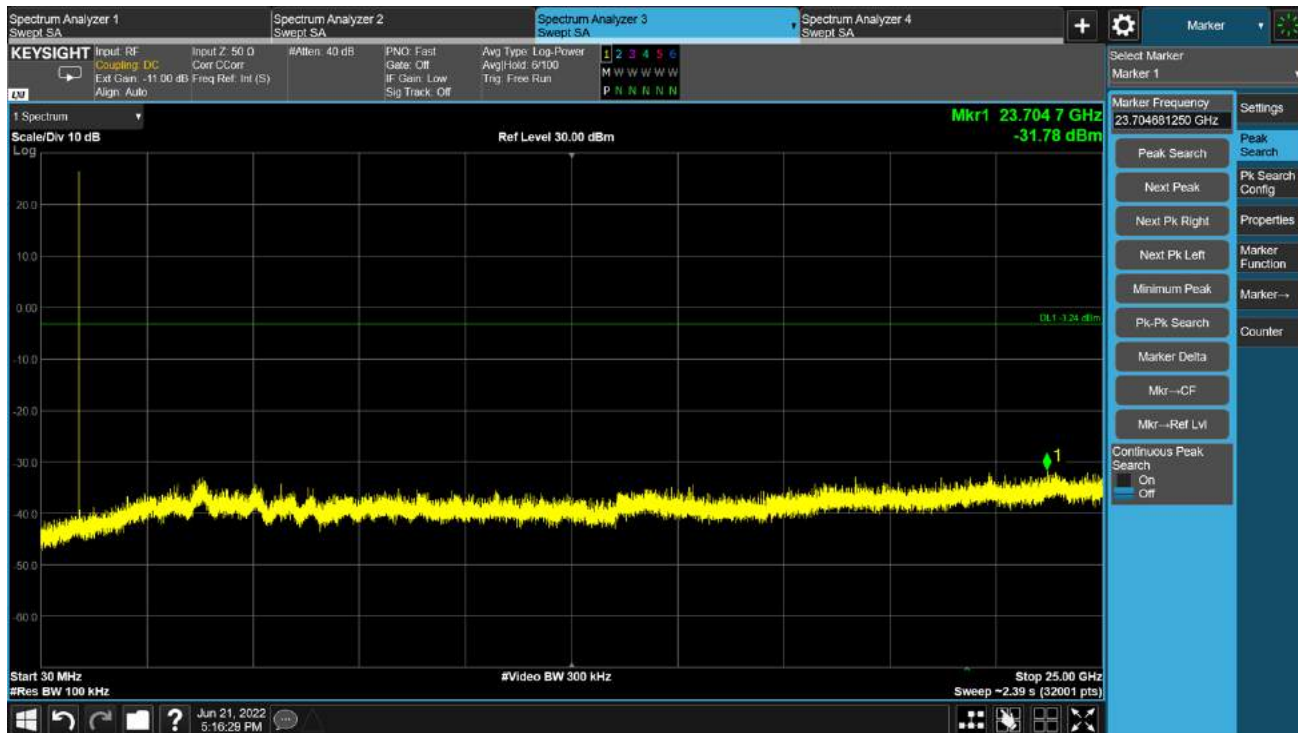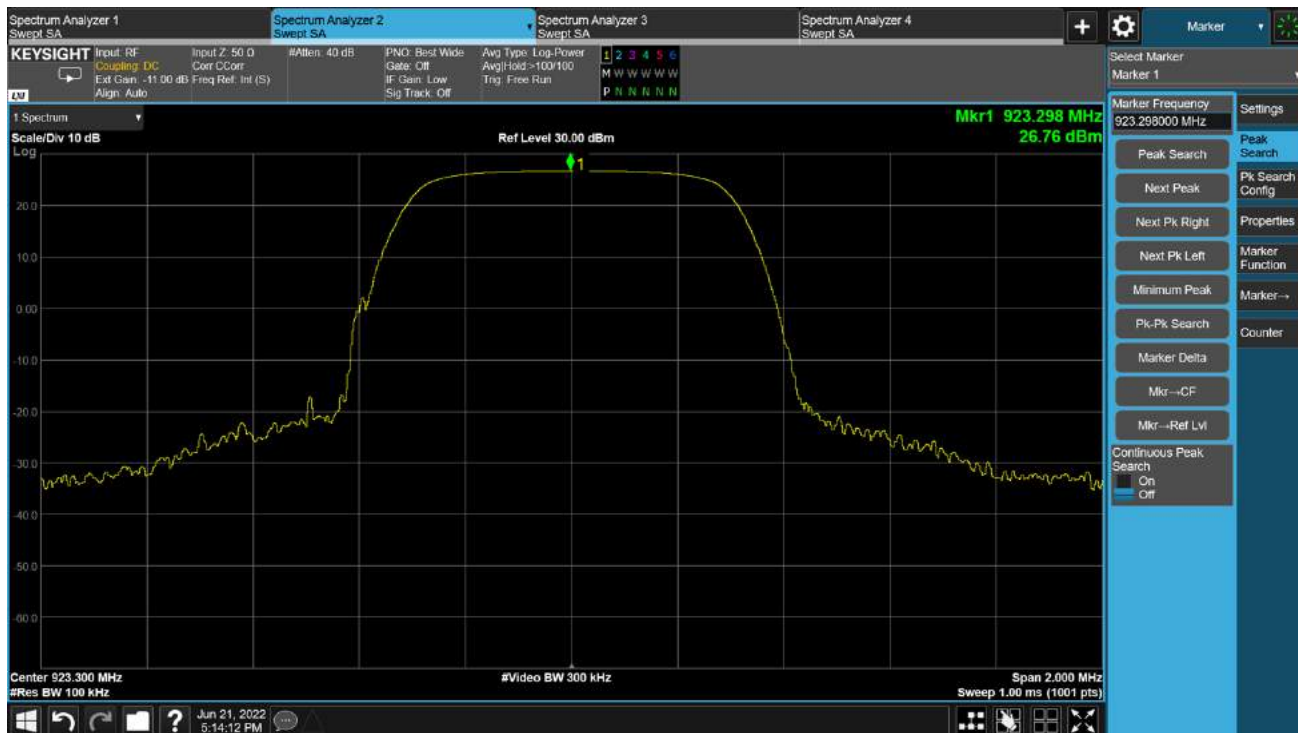



### High Channel

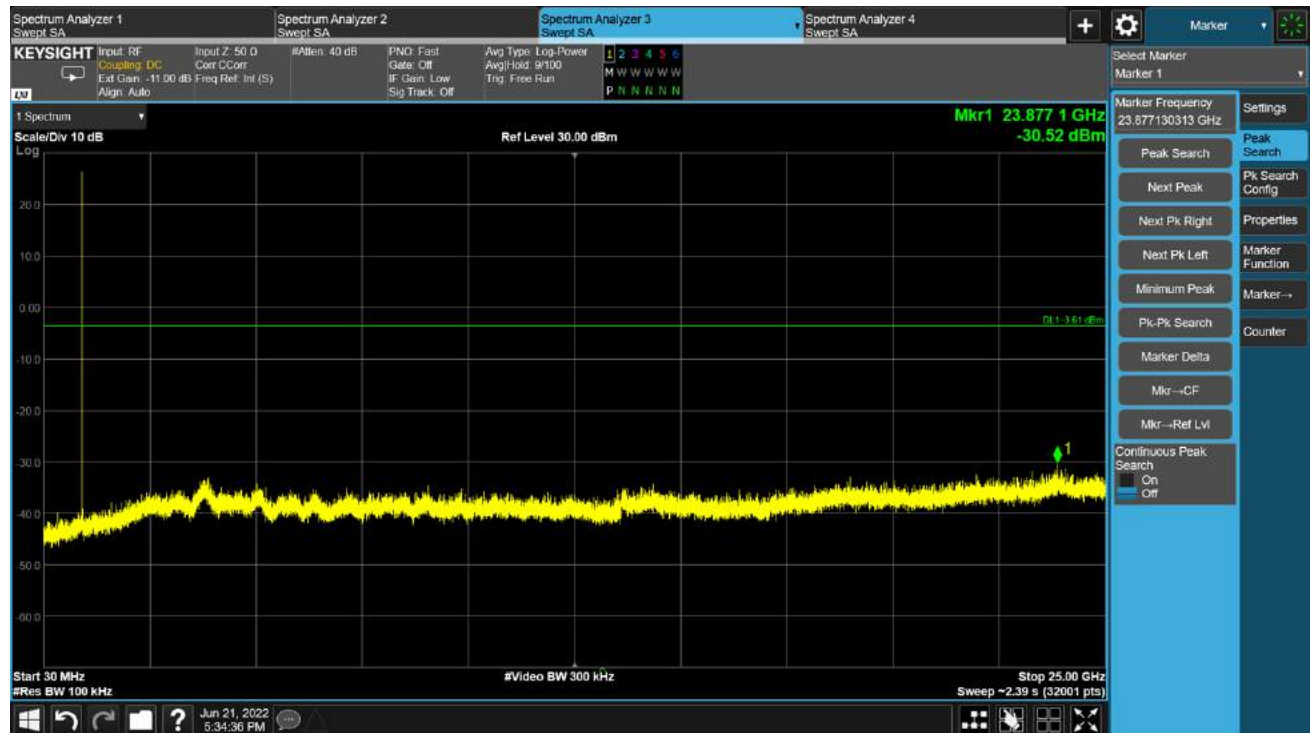


## Appendix B.5: Carrier Frequency Separation


### Lora Hybrid SF7 Low Channel



### Middle Channel

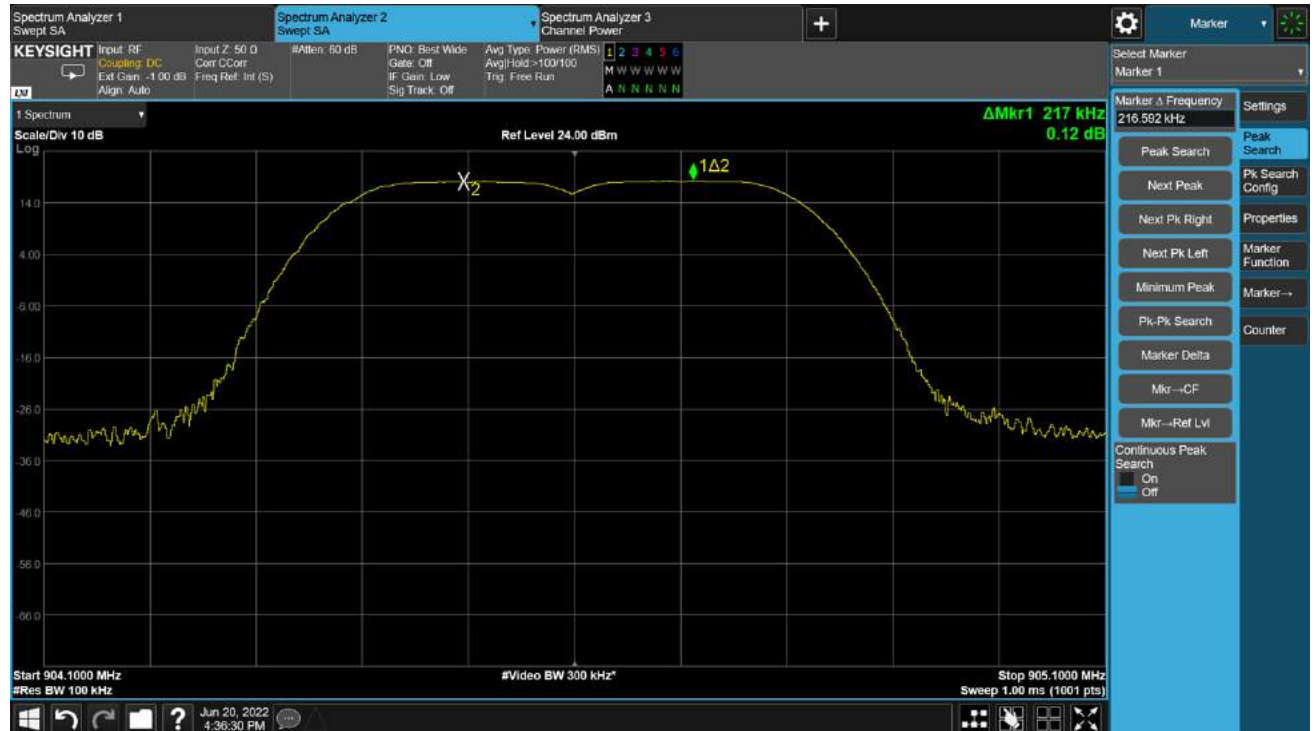

### High Channel

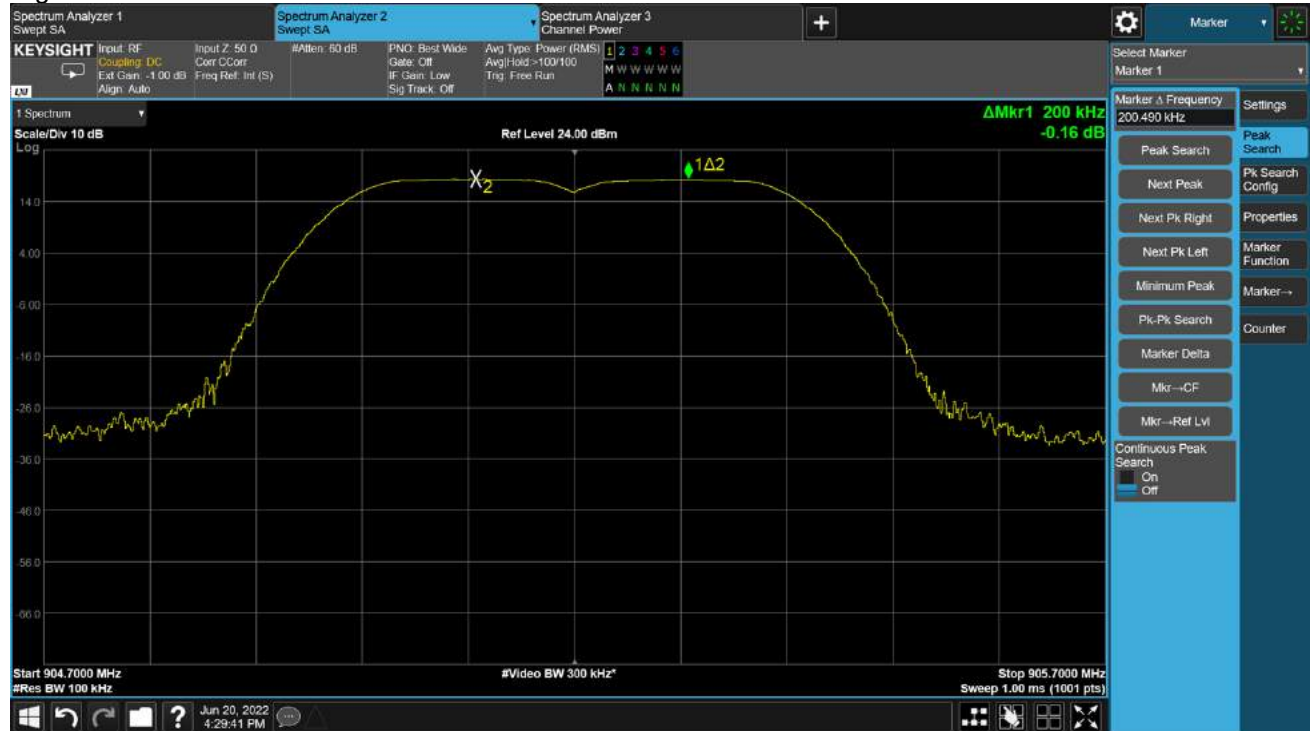


### Lora Hybrid SF9


#### Low Channel




### Middle Channel

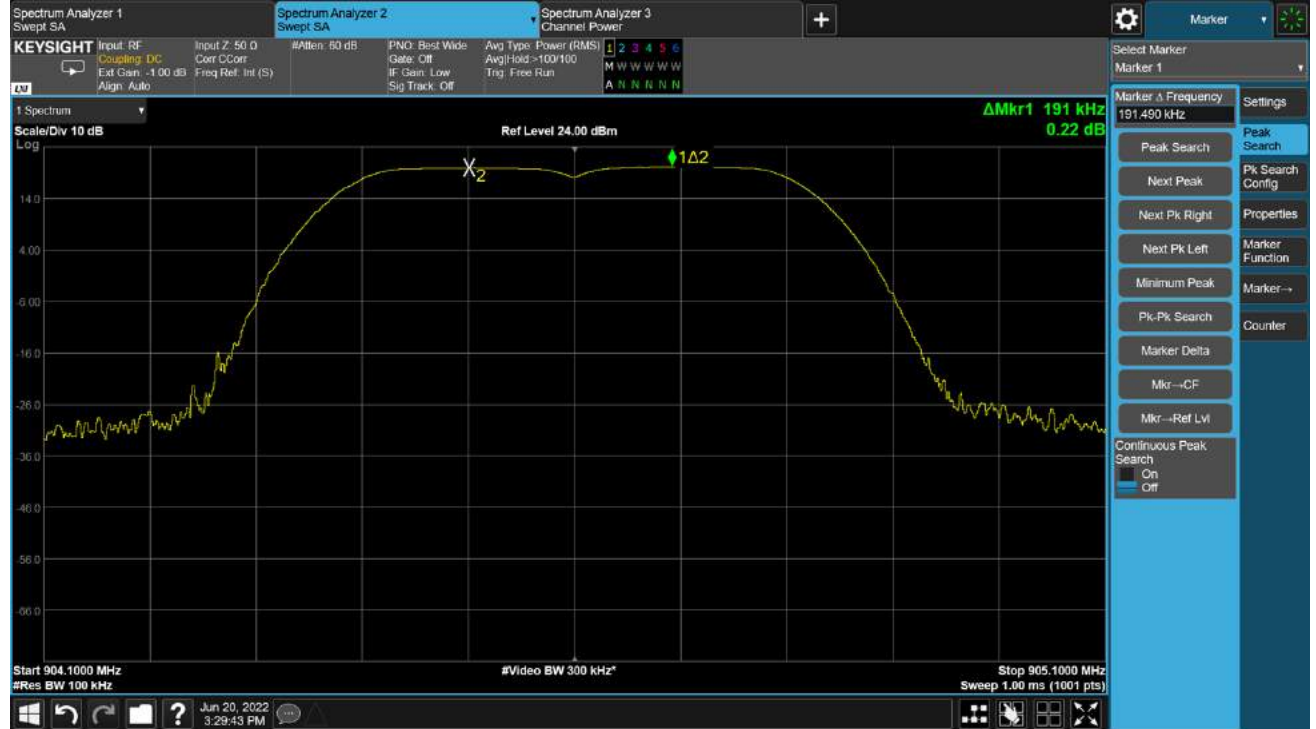


### High Channel

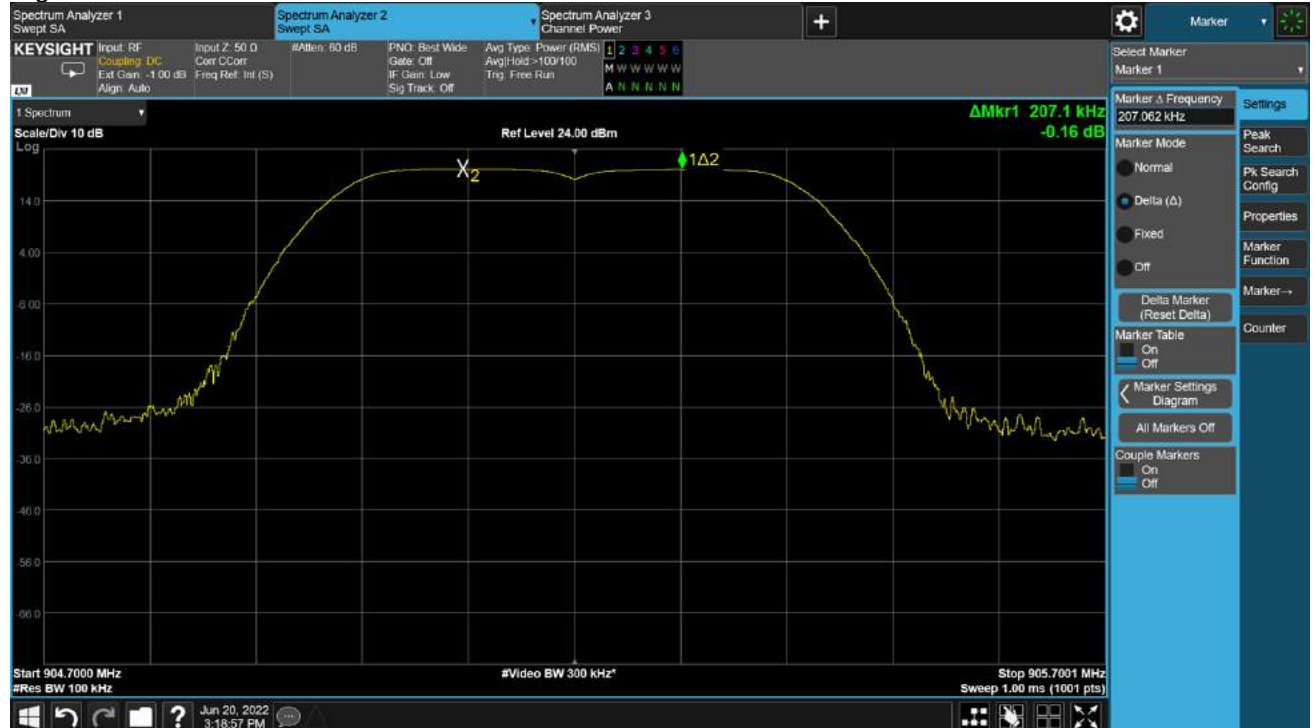

Lora Hybrid SF10  
Low Channel

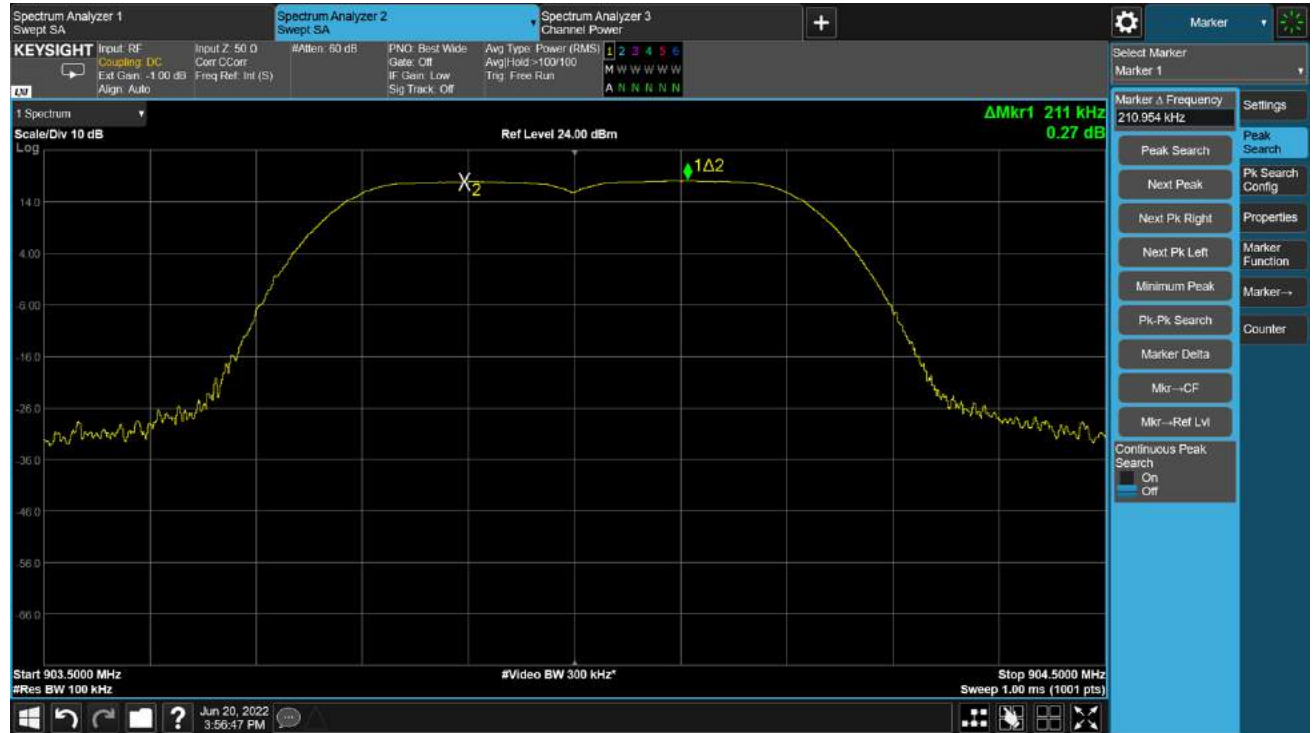

Middle Channel

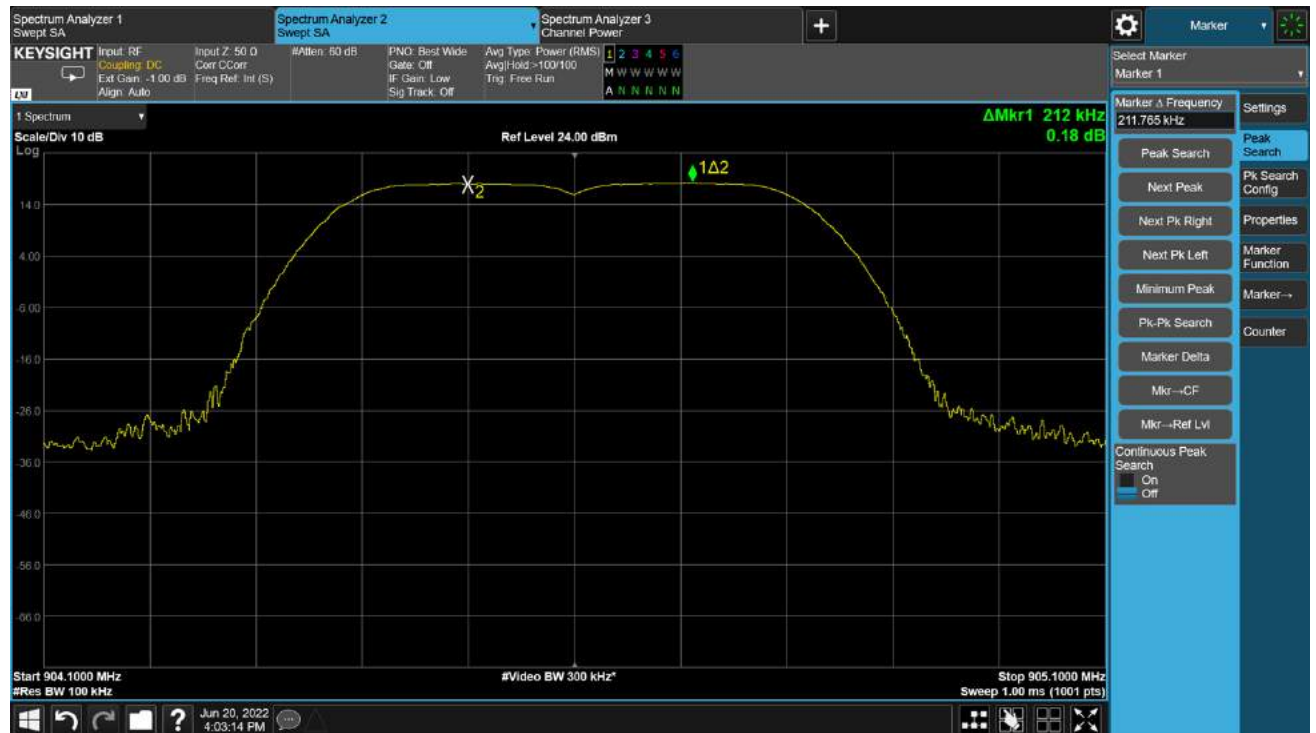

### High Channel




## Appendix B.6: Test Results of Radiated Spurious Emissions

Lora DTS SF7 with 8 dBi antenna

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF7_925.1MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

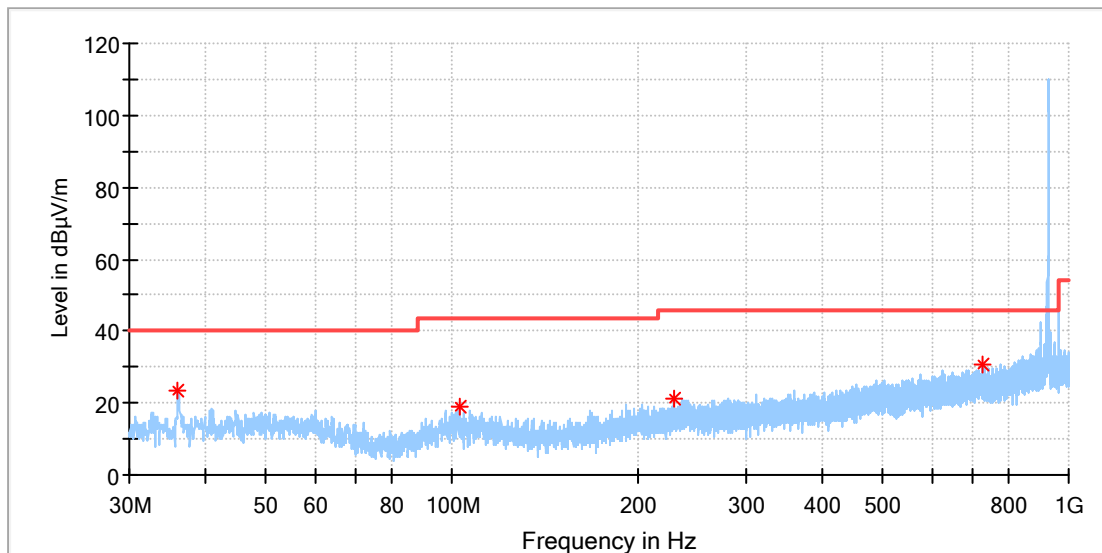


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
36.006539	23.59	40.00	16.41	100.0	H	33.0	-21.8
103.272308	18.97	43.50	24.53	100.0	H	0.0	-19.2
228.476923	21.30	46.00	24.70	100.0	H	25.0	-18.5
722.542692	30.65	46.00	15.35	100.0	H	15.0	-8.0

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF7_925.1MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

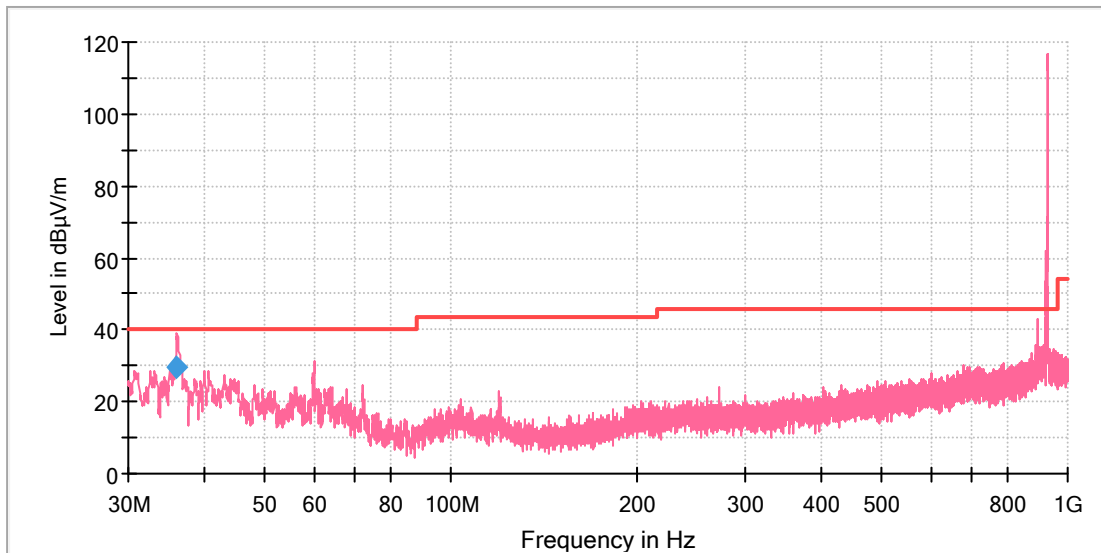

### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
59.995385	31.34	40.00	8.66	100.0	V	38.0	-19.3
119.986154	22.81	43.50	20.69	100.0	V	43.0	-21.1
273.059615	24.10	46.00	21.90	100.0	V	-1.0	-17.2
675.460385	30.28	46.00	15.72	100.0	V	-1.0	-8.9


### Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
35.956962	29.33	40.00	10.67	100.0	V	-3.0	-21.9



### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF7_923.3MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

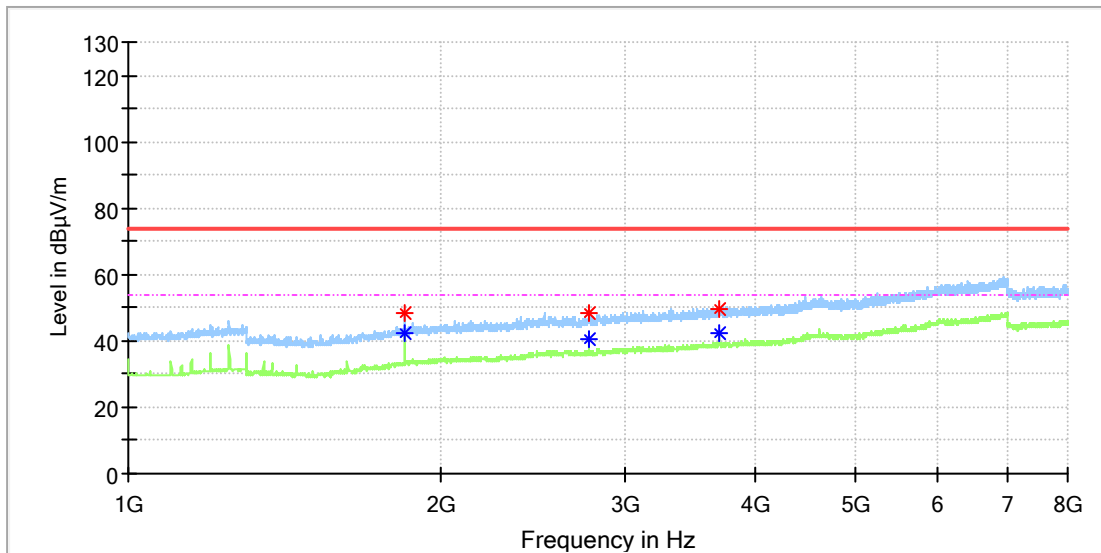


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1846.050000	48.24	---	74.00	25.76	100.0	H	291.0	5.0
1846.050000	---	42.54	54.00	11.46	100.0	H	291.0	5.0
2769.812500	48.07	---	74.00	25.93	100.0	H	338.0	7.9
2769.812500	---	40.44	54.00	13.56	100.0	H	338.0	7.9
3692.737500	---	42.30	54.00	11.70	100.0	H	33.0	9.6
3693.575000	49.42	---	74.00	24.58	100.0	H	33.0	9.6

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF7_923.3MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

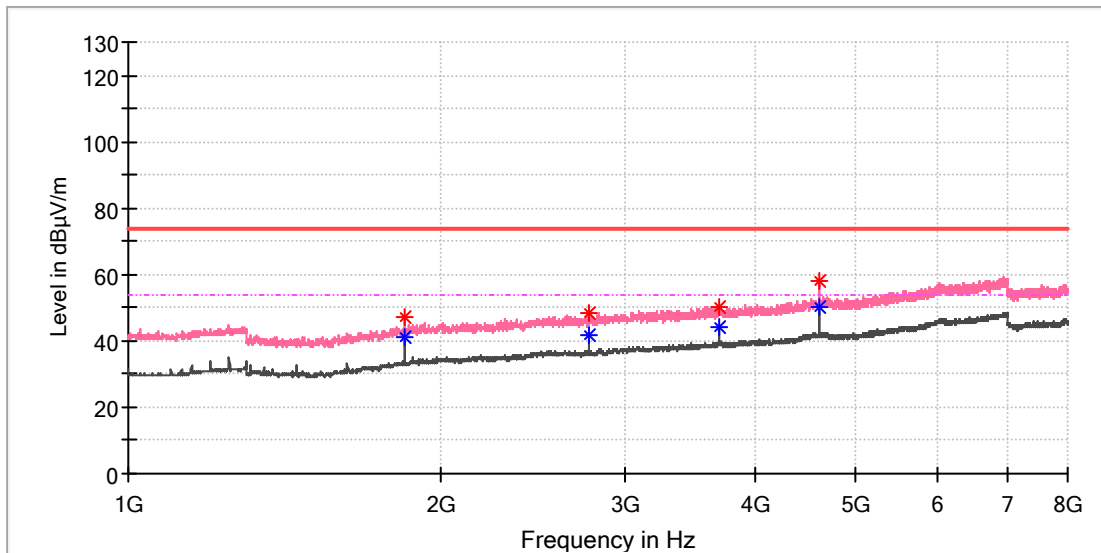


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1846.050000	47.24	---	74.00	26.76	100.0	V	214.0	5.0
1846.050000	---	41.37	54.00	12.63	100.0	V	214.0	5.0
2768.975000	---	41.52	54.00	12.48	100.0	V	338.0	7.9
2769.812500	48.27	---	74.00	25.73	100.0	V	329.0	7.9
3692.737500	---	43.92	54.00	10.08	100.0	V	259.0	9.6
3695.250000	50.34	---	74.00	23.66	100.0	V	355.0	9.6
4615.662500	57.78	---	74.00	16.22	100.0	V	24.0	12.0
4616.500000	---	49.91	54.00	4.09	100.0	V	186.0	12.0

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF7_925.1MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

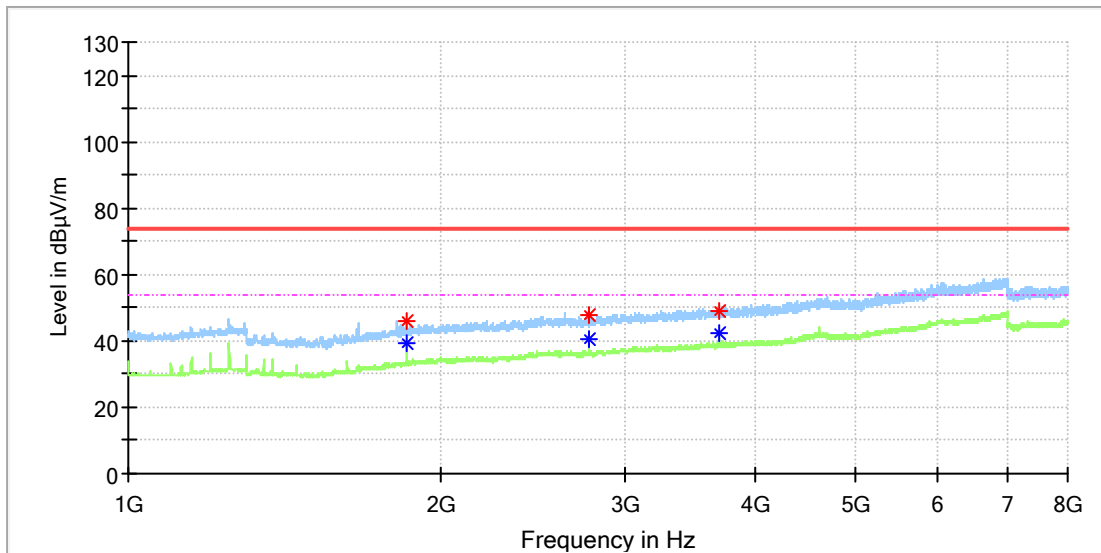


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1849.400000	---	39.06	54.00	14.94	100.0	H	318.0	5.0
1850.237500	45.68	---	74.00	28.32	100.0	H	289.0	5.0
2774.837500	---	40.72	54.00	13.28	100.0	H	6.0	7.9
2775.675000	47.78	---	74.00	26.22	100.0	H	16.0	7.9
3692.737500	49.15	---	74.00	24.85	100.0	H	203.0	9.6
3700.275000	---	42.29	54.00	11.71	100.0	H	327.0	9.6

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF7_925.1MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

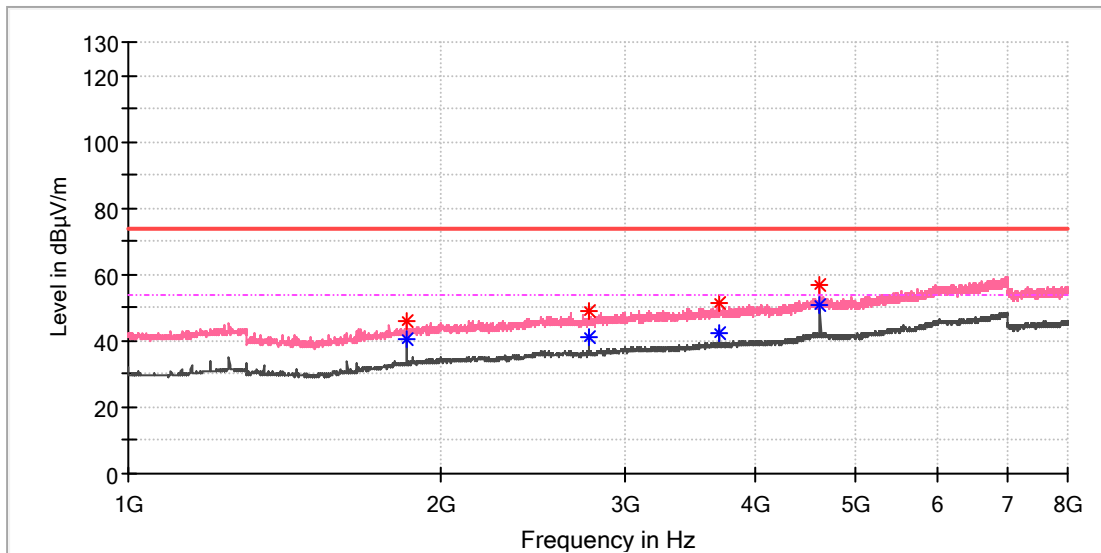


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1849.400000	45.76	---	74.00	28.24	100.0	V	216.0	5.0
1850.237500	---	40.62	54.00	13.38	100.0	V	206.0	5.0
2775.675000	48.75	---	74.00	25.25	100.0	V	188.0	7.9
2775.675000	---	40.87	54.00	13.13	100.0	V	188.0	7.9
3699.437500	---	42.49	54.00	11.51	100.0	V	197.0	9.6
3700.275000	51.15	---	74.00	22.85	100.0	V	251.0	9.6
4625.712500	56.56	---	74.00	17.44	100.0	V	18.0	12.0
4626.550000	---	50.76	54.00	3.24	100.0	V	28.0	12.0

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF7_927.5MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

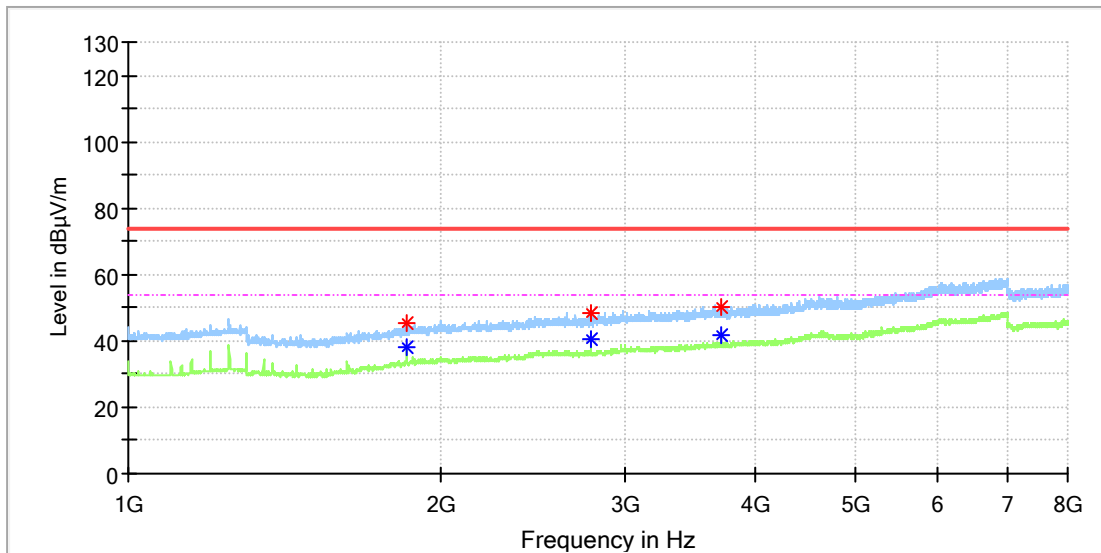


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1854.425000	45.25	---	74.00	28.75	100.0	H	154.0	5.0
1854.425000	---	38.05	54.00	15.95	100.0	H	154.0	5.0
2781.537500	48.33	---	74.00	25.67	100.0	H	316.0	7.9
2782.375000	---	40.56	54.00	13.44	100.0	H	335.0	7.9
3709.487500	---	41.95	54.00	12.05	100.0	H	56.0	9.6
3710.325000	49.91	---	74.00	24.09	100.0	H	235.0	9.6

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF7_927.5MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

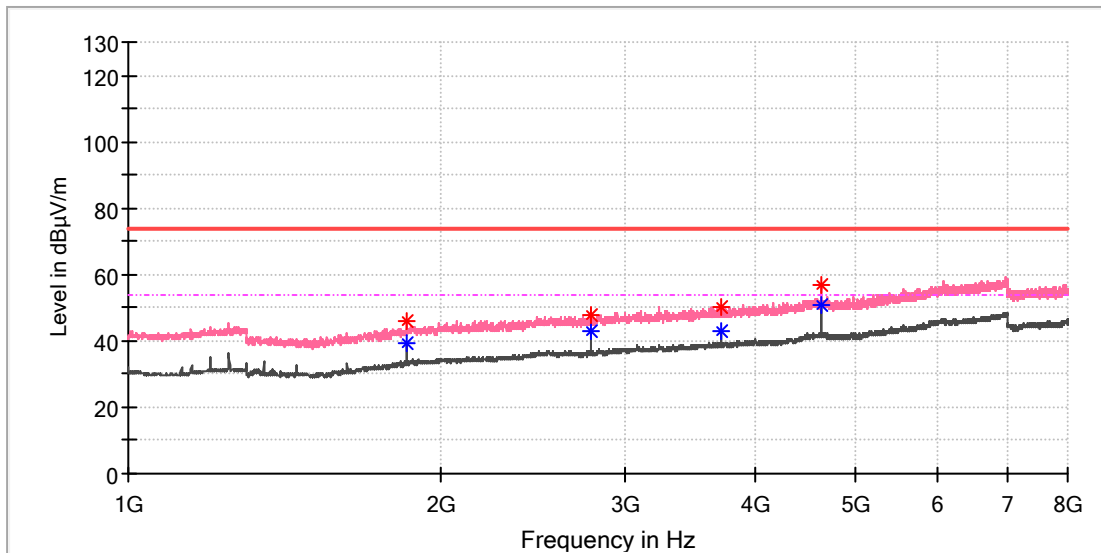


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1854.425000	45.68	---	74.00	28.32	100.0	V	164.0	5.0
1854.425000	---	39.31	54.00	14.69	100.0	V	164.0	5.0
2781.537500	47.55	---	74.00	26.45	100.0	V	295.0	7.9
2782.375000	---	42.65	54.00	11.35	100.0	V	353.0	7.9
3709.487500	50.18	---	74.00	23.82	100.0	V	198.0	9.6
3710.325000	---	42.82	54.00	11.18	100.0	V	110.0	9.6
4636.600000	---	51.02	54.00	2.98	100.0	V	11.0	12.0
4638.275000	56.74	---	74.00	17.26	100.0	V	3.0	12.0

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF7_923.3MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

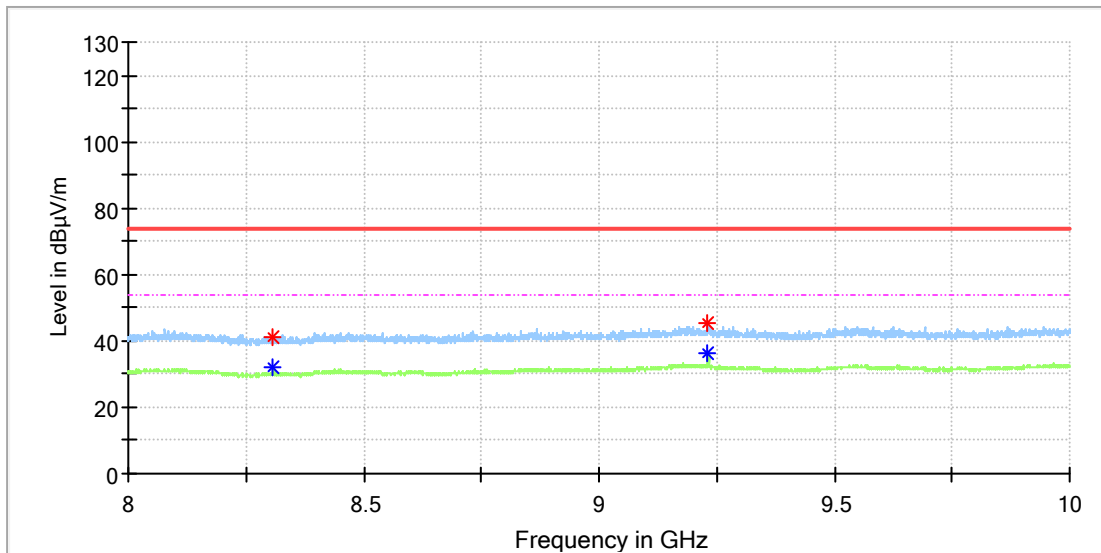


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8308.000000	41.30	---	74.00	32.70	100.0	H	3.0	8.3
8308.500000	---	31.89	54.00	22.11	100.0	H	309.0	8.3
9231.000000	45.13	---	74.00	28.87	100.0	H	350.0	10.4
9231.500000	---	36.44	54.00	17.56	100.0	H	277.0	10.4

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF7_923.3MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

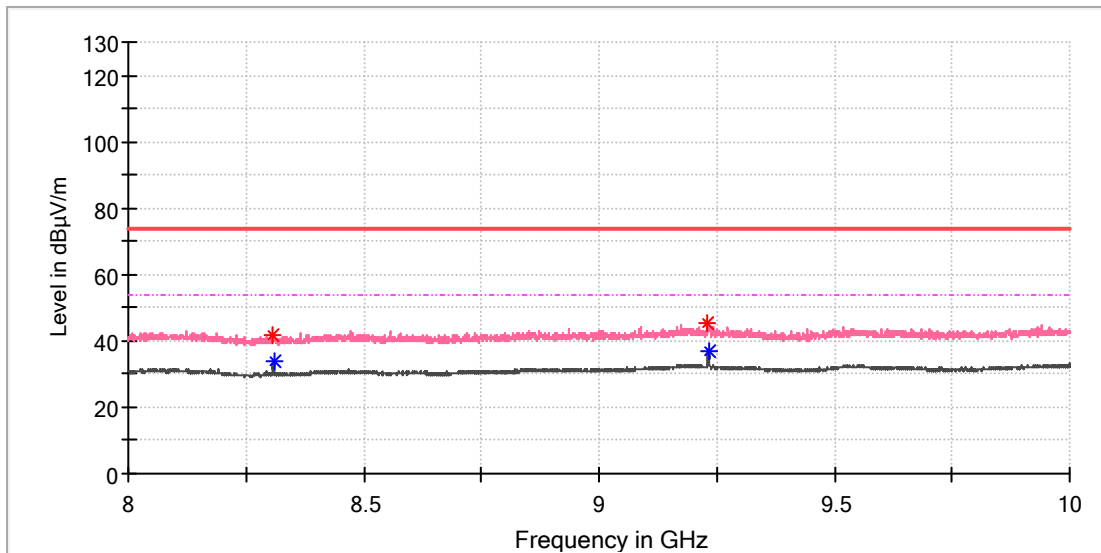


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8308.000000	41.87	---	74.00	32.13	100.0	V	161.0	8.3
8310.500000	---	33.60	54.00	20.40	100.0	V	26.0	8.3
9231.500000	45.46	---	74.00	28.54	100.0	V	350.0	10.4
9235.000000	---	37.11	54.00	16.89	100.0	V	350.0	10.4



### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF7_925.1MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

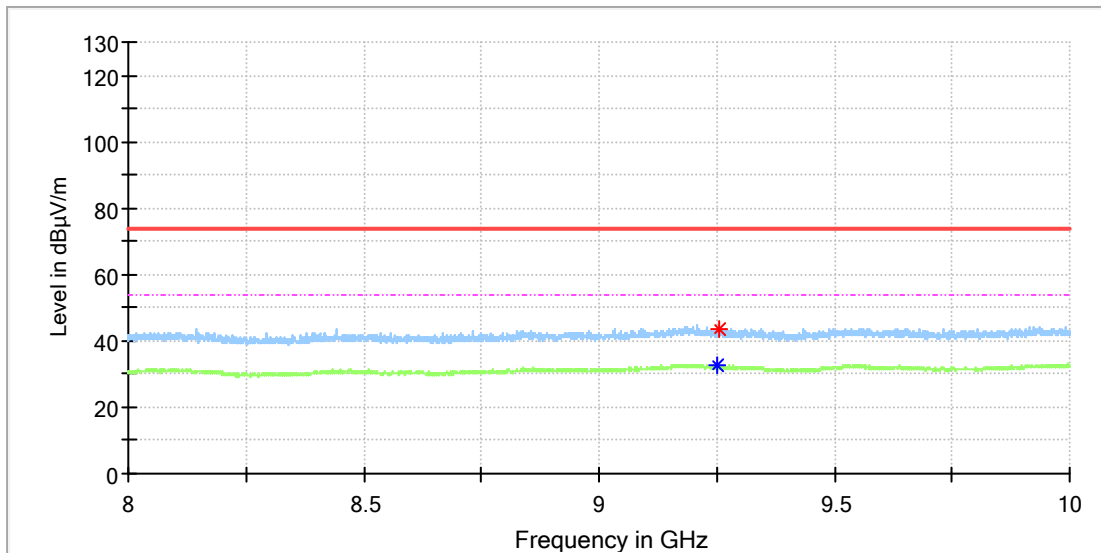


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
9252.500000	---	32.57	54.00	21.43	100.0	H	247.0	10.4
9254.000000	43.47	---	74.00	30.53	100.0	H	45.0	10.4

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF7_925.1MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

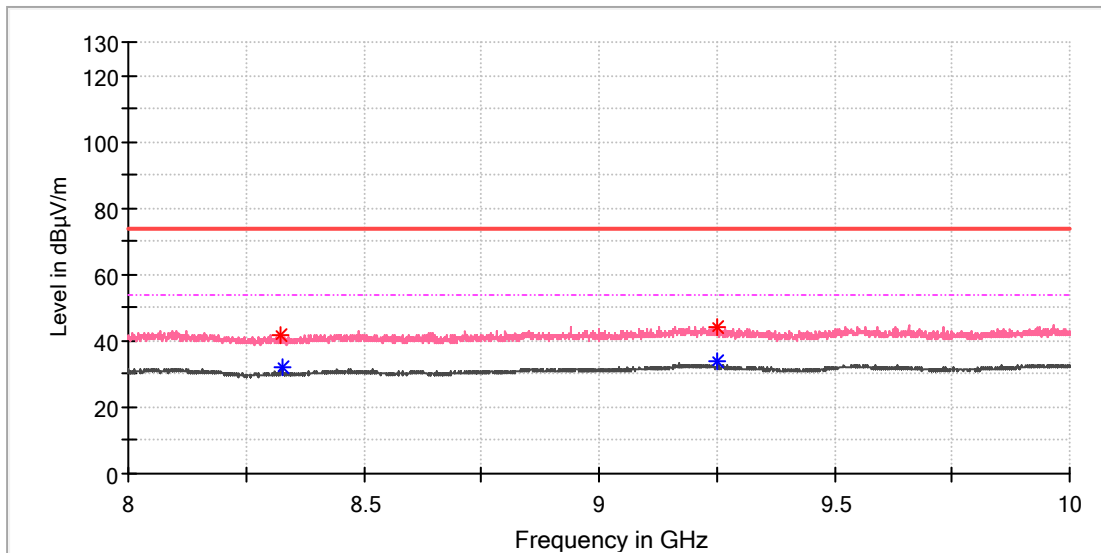


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8325.000000	41.46	---	74.00	32.54	100.0	V	25.0	8.3
8327.000000	---	31.91	54.00	22.09	100.0	V	36.0	8.4
9250.000000	43.97	---	74.00	30.03	100.0	V	346.0	10.5
9252.500000	---	33.90	54.00	20.10	100.0	V	346.0	10.4

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF7_927.5MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

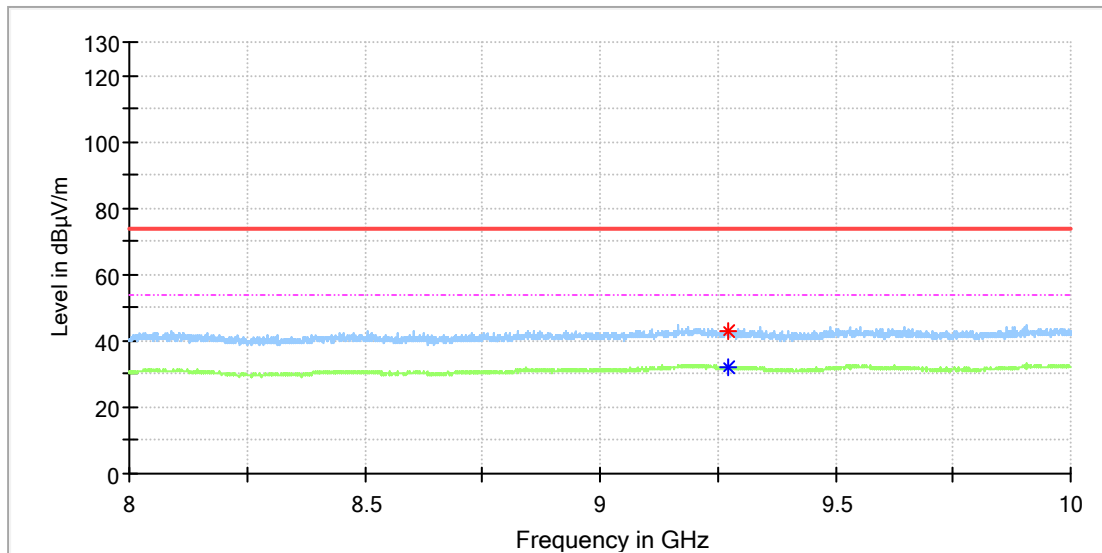


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
9273.000000	43.18	---	74.00	30.82	100.0	H	0.0	10.2
9273.000000	---	32.08	54.00	21.92	100.0	H	0.0	10.2

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF7_927.5MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

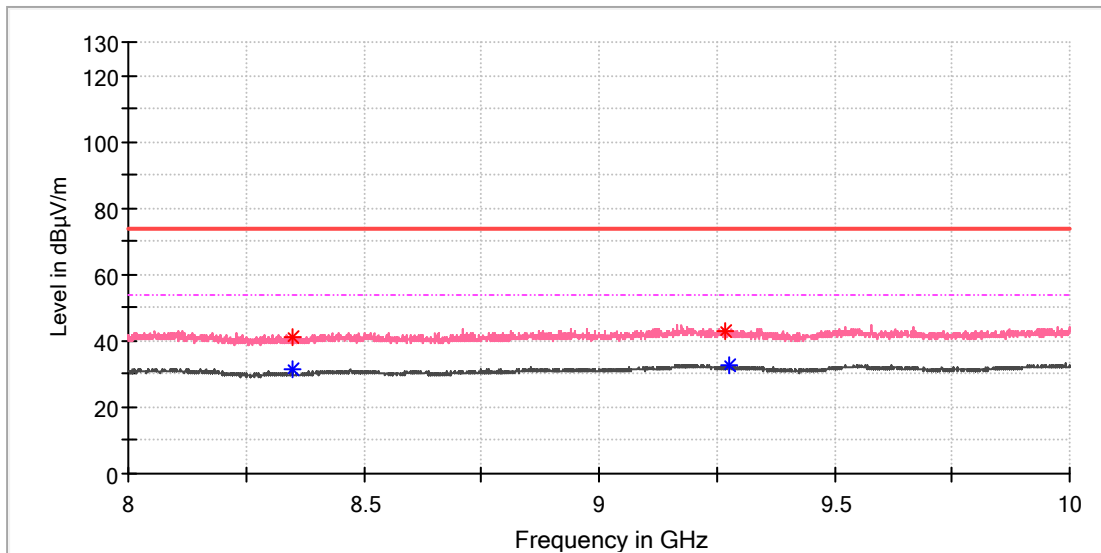


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8347.000000	41.34	---	74.00	32.66	100.0	V	34.0	8.4
8347.000000	---	31.47	54.00	22.53	100.0	V	34.0	8.4
9269.000000	42.97	---	74.00	31.03	100.0	V	327.0	10.2
9275.000000	---	32.93	54.00	21.07	100.0	V	344.0	10.2

**Lora DTS SF8 with 8 dBi antenna**

**EUT Information**

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF8_904.6MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

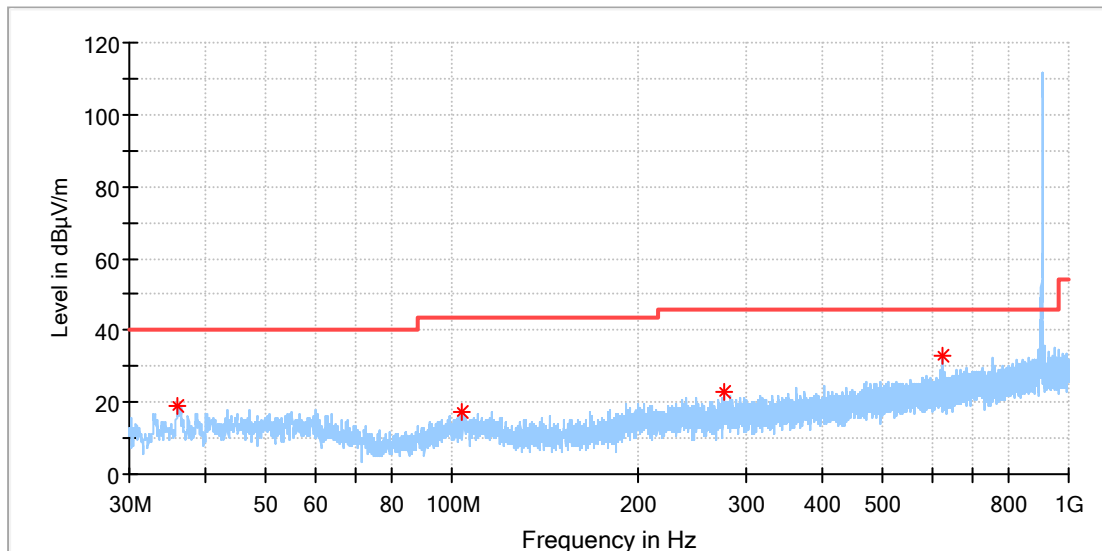


**Critical Freqs**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
35.969231	18.92	40.00	21.08	100.0	H	43.0	-21.9
103.458846	17.31	43.50	26.19	100.0	H	21.0	-19.2
276.865000	22.73	46.00	23.27	100.0	H	43.0	-17.1
625.020385	33.14	46.00	12.86	100.0	H	0.0	-9.8

## EUT Information

EUT Name: WisLink LPWAN Concentrator  
 Model: RAK5147  
 Test Mode: Lora DTS 500K\_SF8\_904.6MHz  
 Order No/Sample No: 168376259/A003275919-006  
 Test Voltage:: DC 5V via USB  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

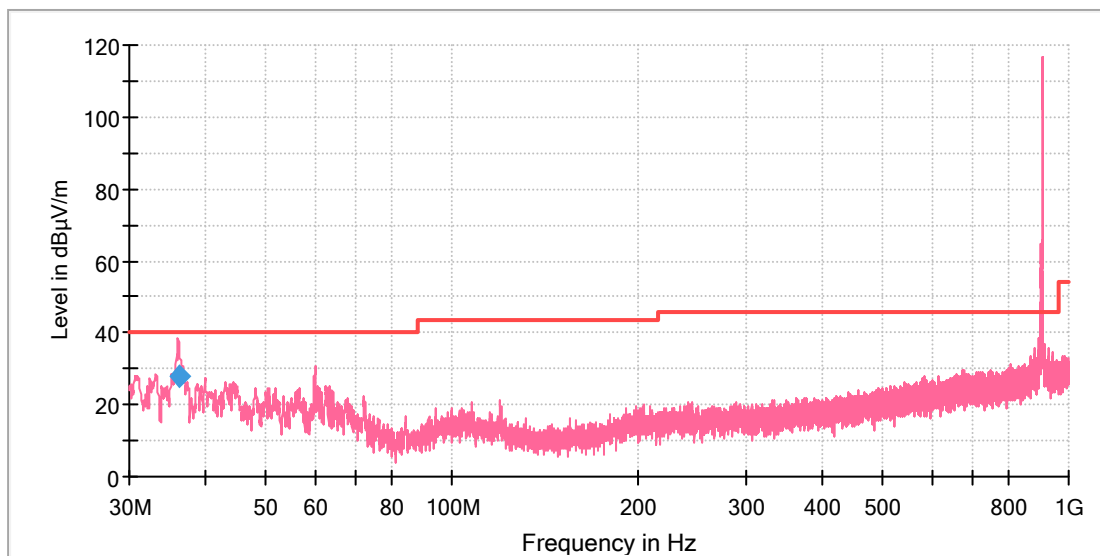

## Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
59.995385	30.52	40.00	9.48	100.0	V	30.0	-19.3
119.986154	21.33	43.50	22.17	100.0	V	45.0	-21.1
581.706154	27.66	46.00	18.34	100.0	V	12.0	-10.6

## Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
36.070000	28.05	40.00	11.95	105.0	V	5.0	-21.8

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF8_904.6MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

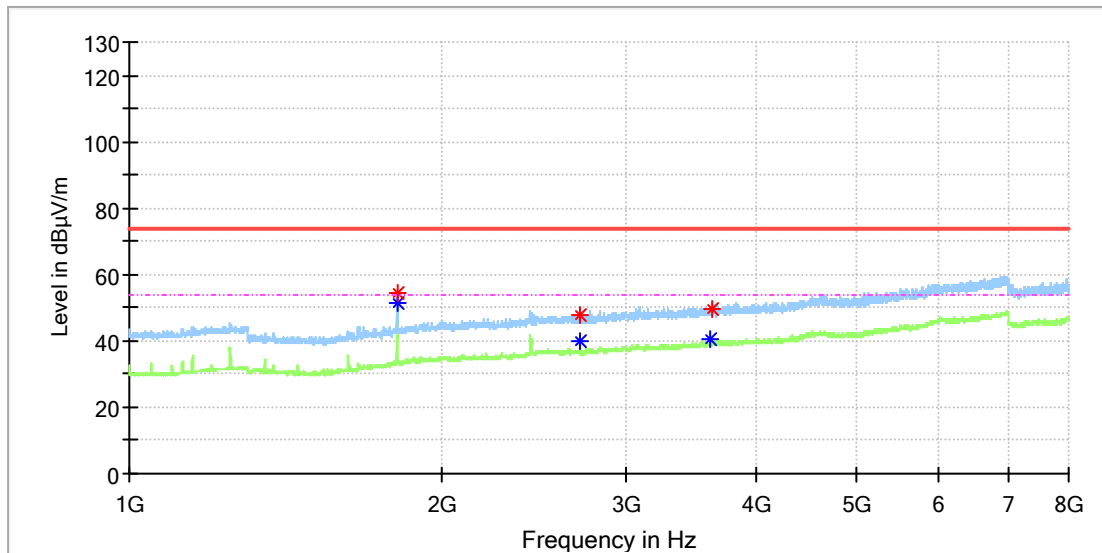


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1808.362500	---	51.51	54.00	2.49	100.0	H	307.0	4.8
1809.200000	54.48	---	74.00	19.52	100.0	H	299.0	4.8
2712.862500	---	39.90	54.00	14.10	100.0	H	335.0	7.6
2714.537500	47.53	---	74.00	26.47	100.0	H	166.0	7.6
3618.200000	---	40.81	54.00	13.19	100.0	H	67.0	9.4
3629.925000	49.67	---	74.00	24.33	100.0	H	325.0	9.4

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF8_904.6MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

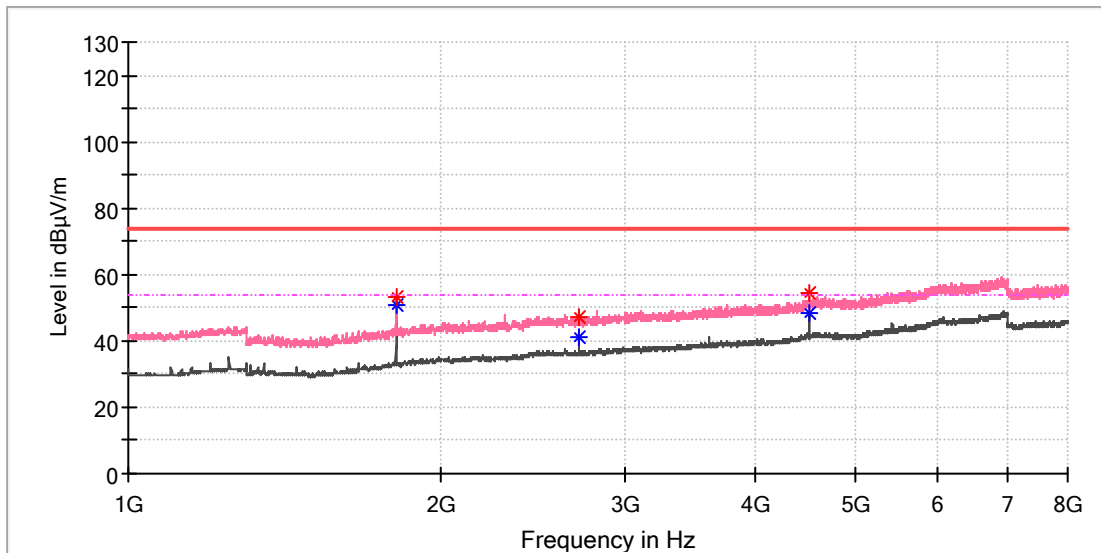


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1808.362500	53.20	---	74.00	20.80	100.0	V	323.0	4.8
1809.200000	---	50.68	54.00	3.32	100.0	V	21.0	4.8
2712.862500	---	41.03	54.00	12.97	100.0	V	218.0	7.6
2712.862500	47.31	---	74.00	26.69	100.0	V	218.0	7.6
4522.700000	54.57	---	74.00	19.43	100.0	V	31.0	11.7
4523.537500	---	48.56	54.00	5.44	100.0	V	21.0	11.7



### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF8_904.6MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

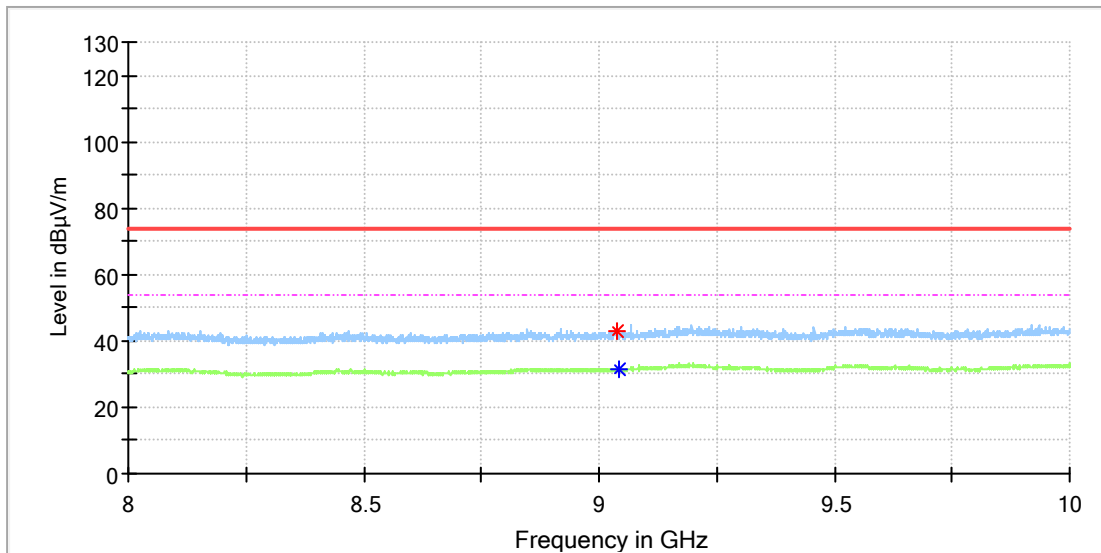


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
9040.000000	42.63	---	74.00	31.37	100.0	H	39.0	8.9
9042.000000	---	31.51	54.00	22.49	100.0	H	152.0	8.9

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF8_904.6MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

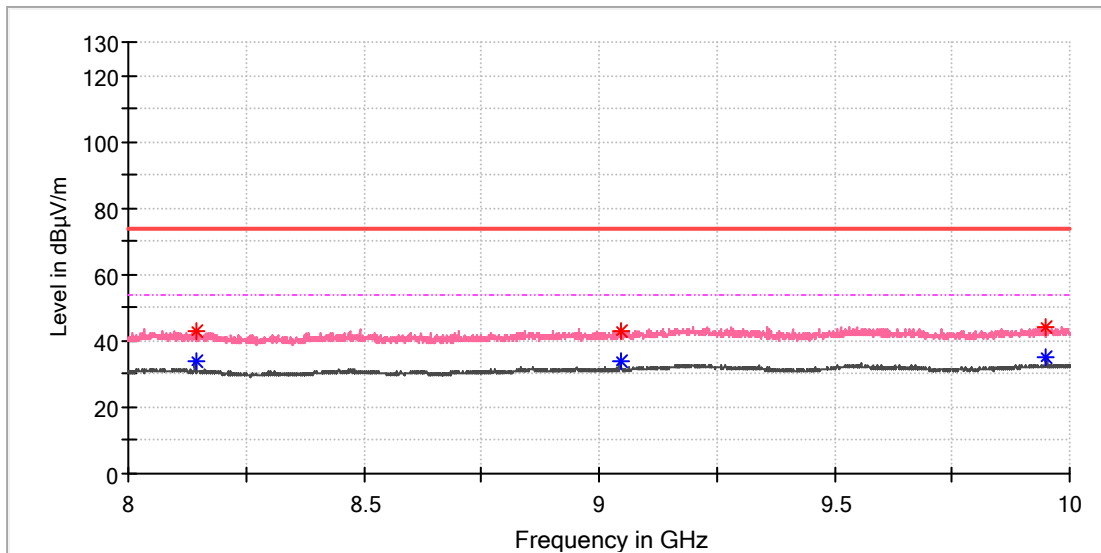


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8143.000000	42.65	---	74.00	31.35	100.0	V	14.0	8.5
8143.000000	---	33.99	54.00	20.01	100.0	V	14.0	8.5
9045.000000	42.67	---	74.00	31.33	100.0	V	54.0	9.0
9046.500000	---	34.05	54.00	19.95	100.0	V	6.0	9.0
9950.000000	---	35.09	54.00	18.91	100.0	V	336.0	10.4
9951.000000	44.14	---	74.00	29.86	100.0	V	328.0	10.4

**Lora DTS SF12 with 8 dBi antenna**

**EUT Information**

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF12_927.5MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

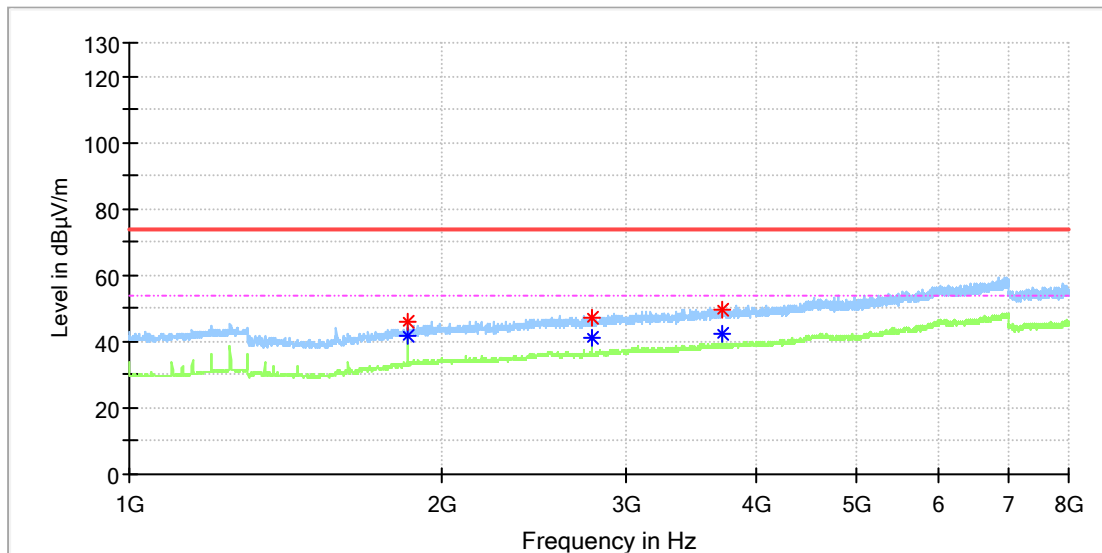


**Critical Freqs**

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1854.425000	45.95	---	74.00	28.05	100.0	H	355.0	5.0
1854.425000	---	41.44	54.00	12.56	100.0	H	355.0	5.0
2779.025000	47.10	---	74.00	26.90	100.0	H	95.0	7.9
2782.375000	---	41.19	54.00	12.81	100.0	H	291.0	7.9
3709.487500	49.45	---	74.00	24.55	100.0	H	39.0	9.6
3709.487500	---	42.16	54.00	11.84	100.0	H	39.0	9.6

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF12_927.5MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

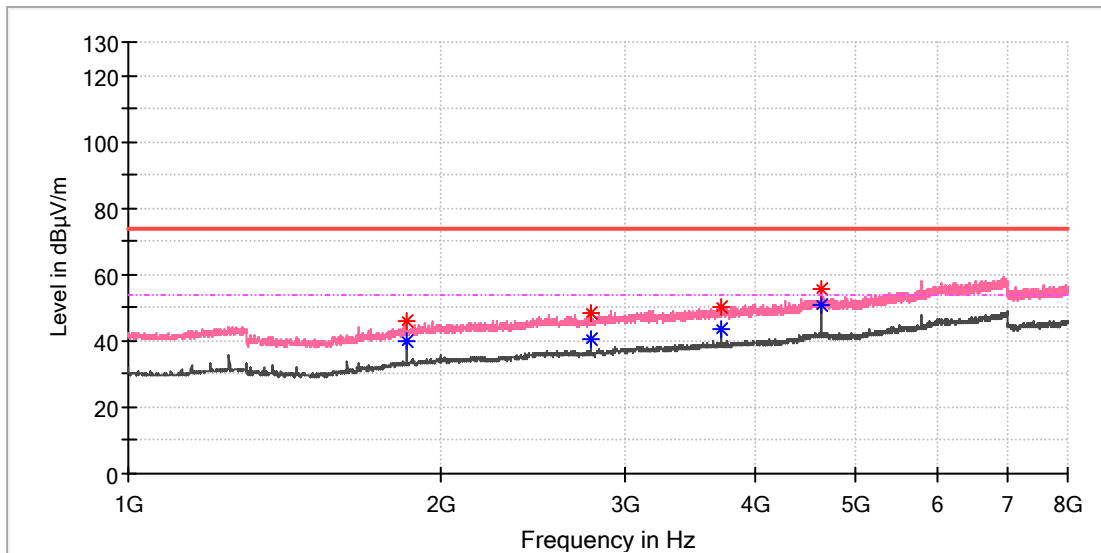


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1854.425000	45.66	---	74.00	28.34	100.0	V	199.0	5.0
1854.425000	---	39.82	54.00	14.18	100.0	V	199.0	5.0
2781.537500	48.10	---	74.00	25.90	100.0	V	15.0	7.9
2781.537500	---	40.38	54.00	13.62	100.0	V	15.0	7.9
3710.325000	50.25	---	74.00	23.75	100.0	V	199.0	9.6
3710.325000	---	43.39	54.00	10.61	100.0	V	199.0	9.6
4638.275000	55.89	---	74.00	18.11	100.0	V	32.0	12.0
4638.275000	---	50.85	54.00	3.15	100.0	V	32.0	12.0

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF12_927.5MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

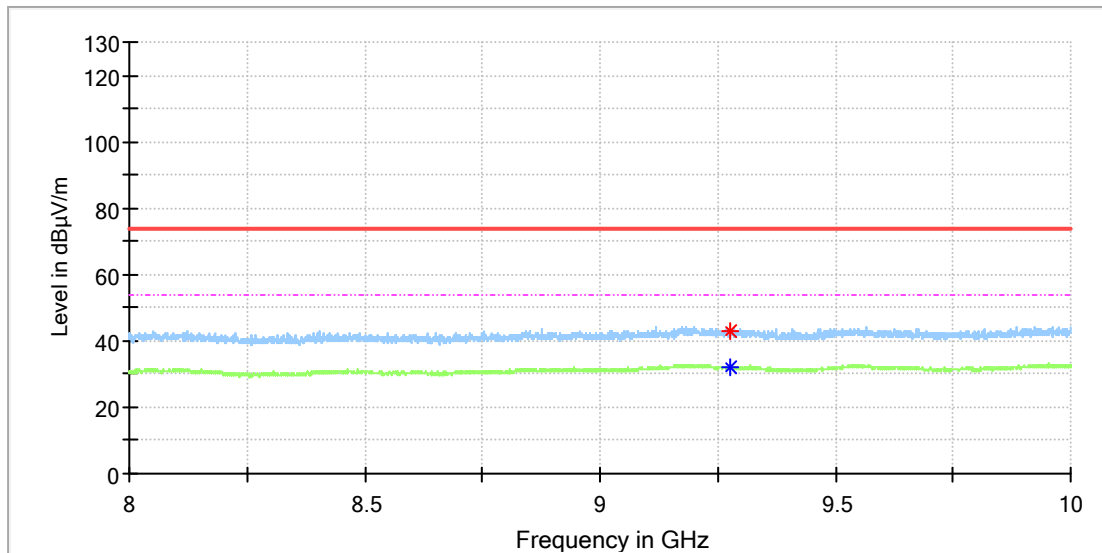


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
9276.500000	---	32.10	54.00	21.90	100.0	H	98.0	10.2
9278.000000	43.13	---	74.00	30.87	100.0	H	98.0	10.2

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF12_927.5MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

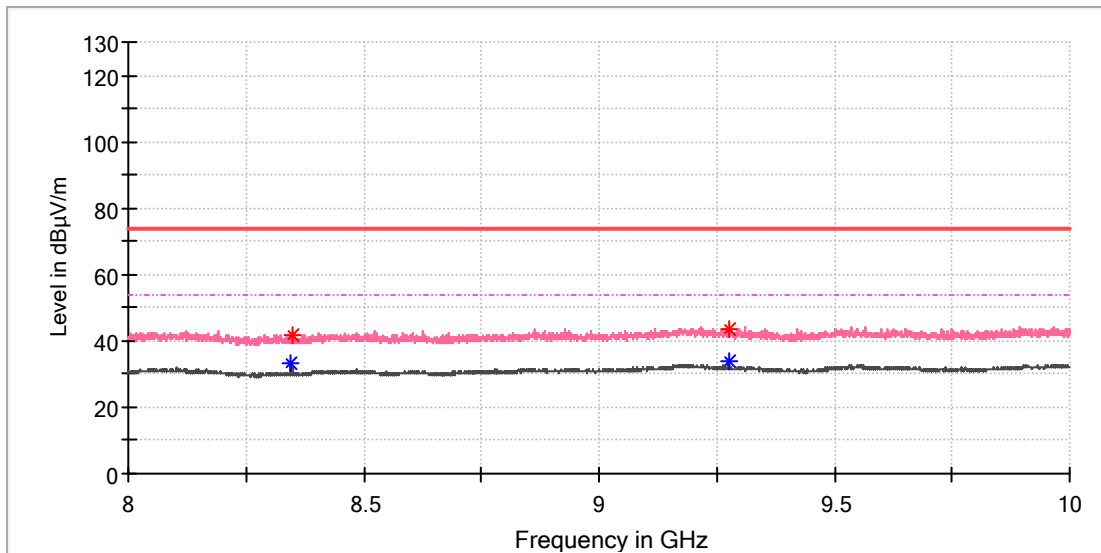


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8345.500000	---	33.05	54.00	20.95	100.0	V	164.0	8.4
8350.000000	41.72	---	74.00	32.28	100.0	V	164.0	8.5
9274.500000	43.54	---	74.00	30.46	100.0	V	335.0	10.2
9274.500000	---	34.16	54.00	19.84	100.0	V	335.0	10.2

**Lora DTS SF7 with 2.3dBi antenna**

**EUT Information**

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF7_927.5MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage:	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

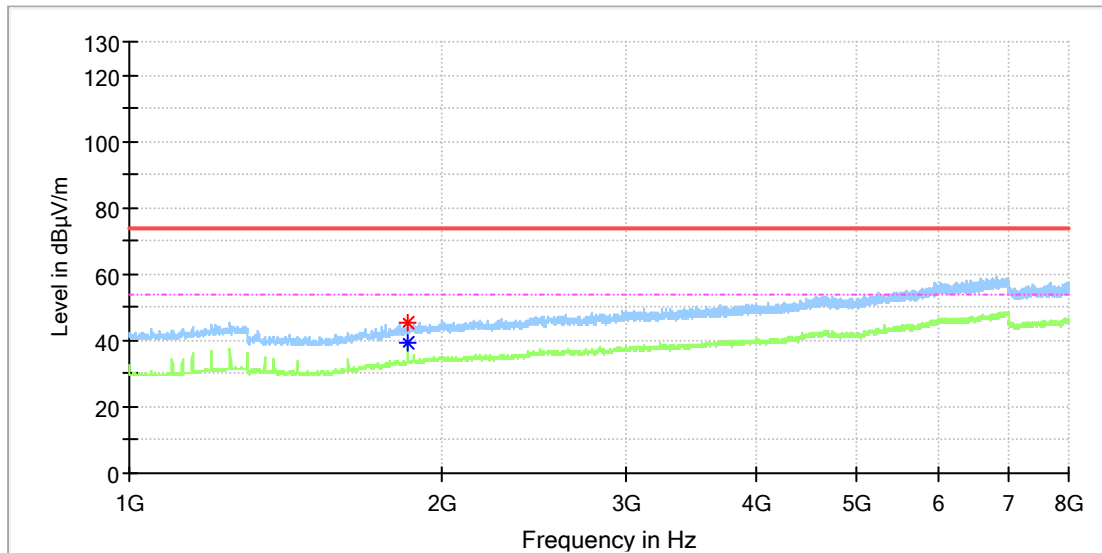


**Critical Freqs**

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1854.425000	45.48	---	74.00	28.52	100.0	H	111.0	5.0
1854.425000	---	39.58	54.00	14.42	100.0	H	111.0	5.0

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF7_927.5MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

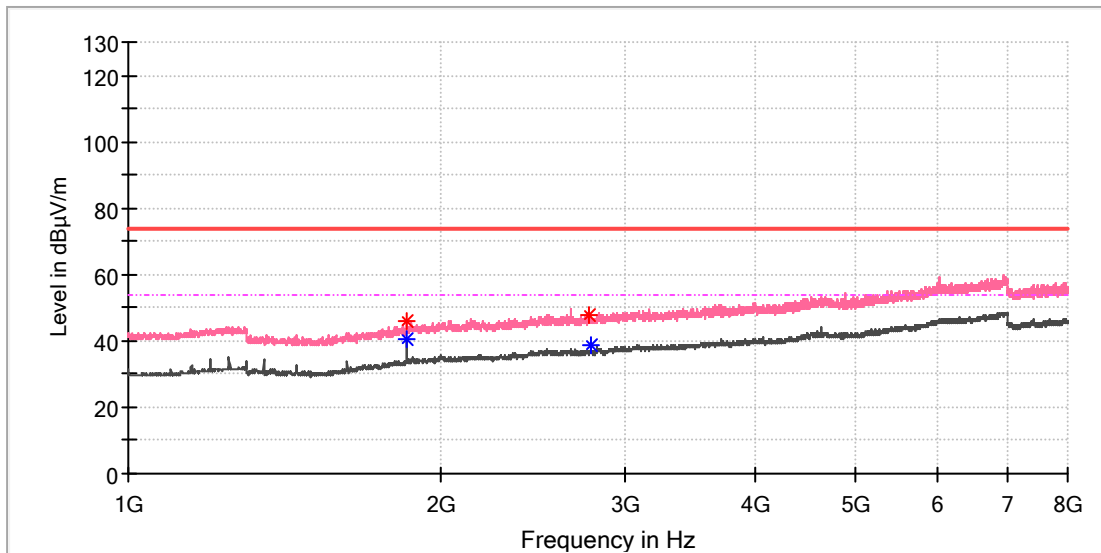


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1854.425000	46.12	---	74.00	27.88	100.0	V	89.0	5.0
1854.425000	---	40.31	54.00	13.69	100.0	V	89.0	5.0
2771.487500	47.87	---	74.00	26.13	100.0	V	121.0	7.9
2782.375000	---	38.76	54.00	15.24	100.0	V	1.0	7.9



### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF7_927.5MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

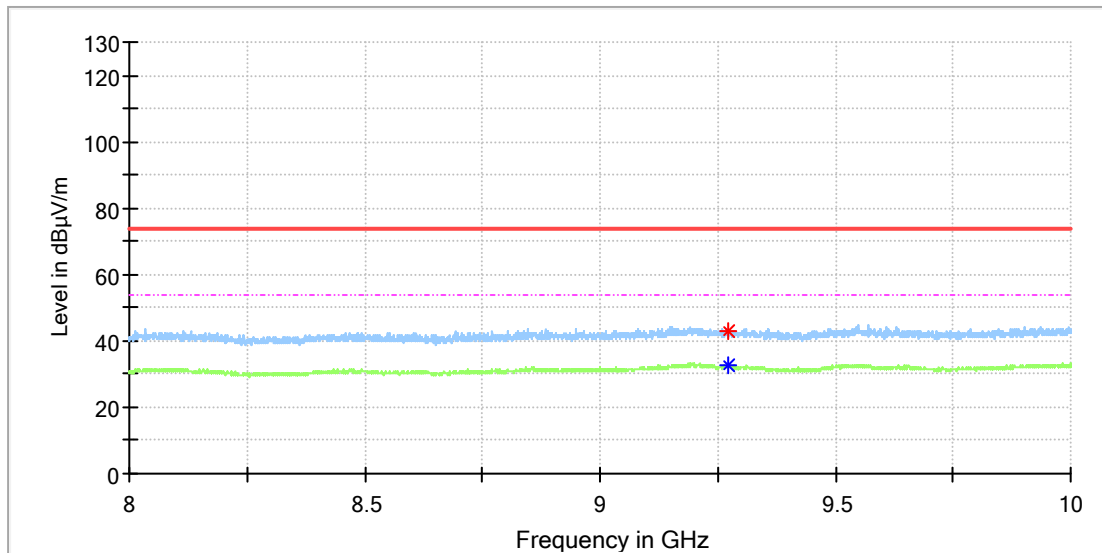


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
9273.500000	---	32.47	54.00	21.53	100.0	H	86.0	10.2
9274.000000	42.79	---	74.00	31.21	100.0	H	108.0	10.2

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF7_927.5MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

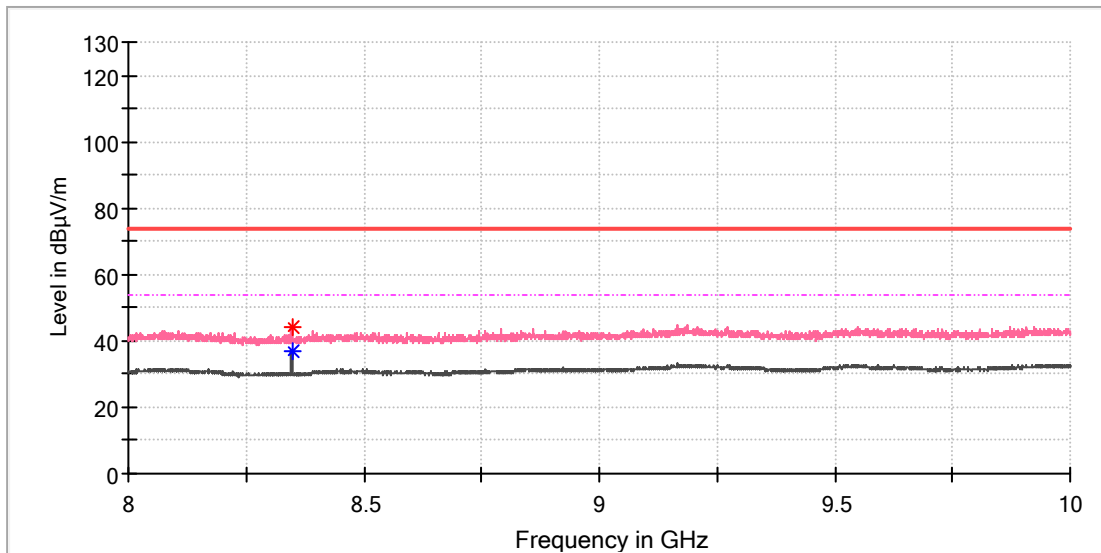


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8347.000000	---	36.73	54.00	17.27	100.0	V	2.0	8.4
8348.500000	43.88	---	74.00	30.12	100.0	V	169.0	8.5

**Lora DTS SF8 with 2.3dBi antenna**

**EUT Information**

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF8_904.6MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

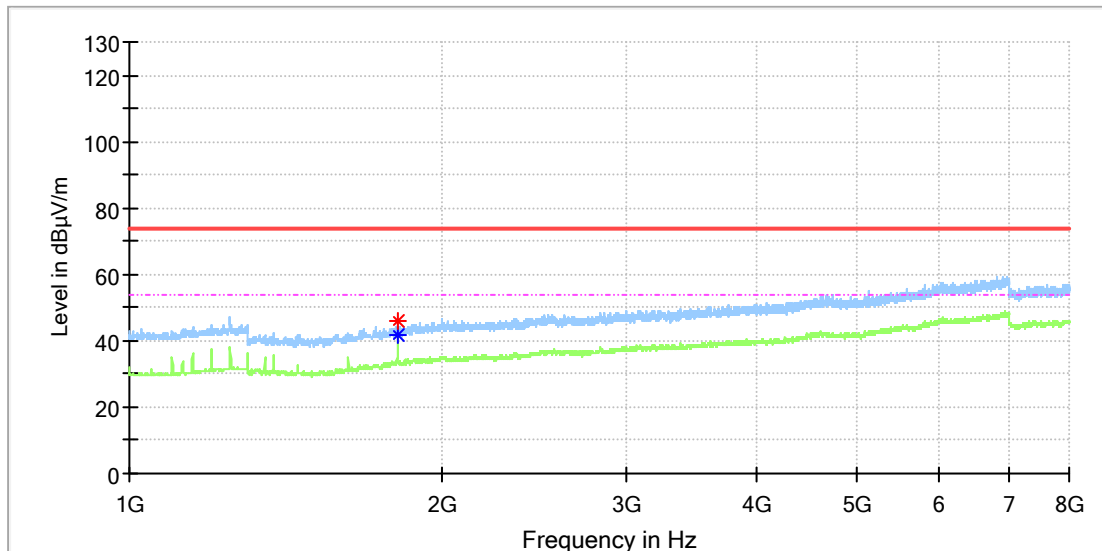


**Critical Freqs**

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1808.362500	46.24	---	74.00	27.76	100.0	H	176.0	4.8
1809.200000	---	41.48	54.00	12.52	100.0	H	326.0	4.8

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF8_904.6MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

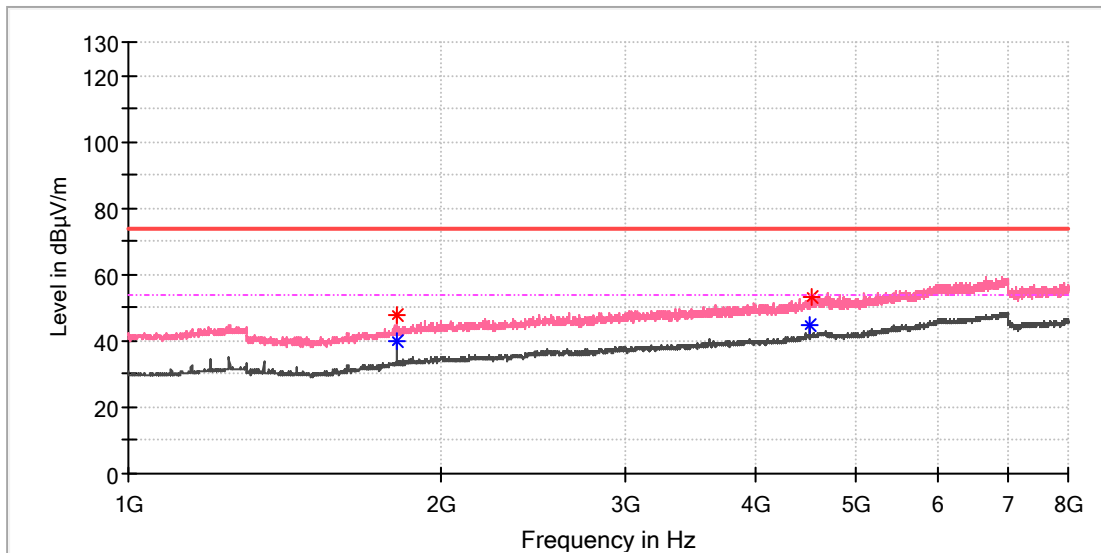


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1808.362500	---	39.70	54.00	14.30	100.0	V	304.0	4.8
1809.200000	47.53	---	74.00	26.47	100.0	V	20.0	4.8
4523.537500	---	44.56	54.00	9.44	100.0	V	20.0	11.7
4533.587500	53.09	---	74.00	20.91	100.0	V	65.0	11.8

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF8_904.6MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

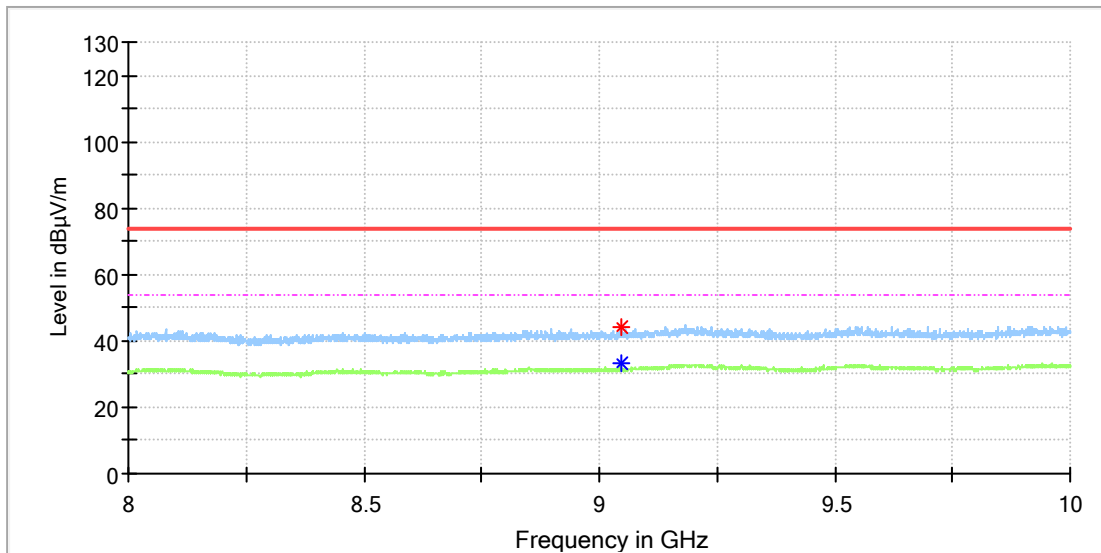


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
9045.000000	44.19	---	74.00	29.81	100.0	H	27.0	9.0
9045.000000	---	33.45	54.00	20.55	100.0	H	27.0	9.0

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora DTS 500K_SF8_904.6MHz
Order No/Sample No:	168376259/A003275919-006
Test Voltage::	DC 5V via USB
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

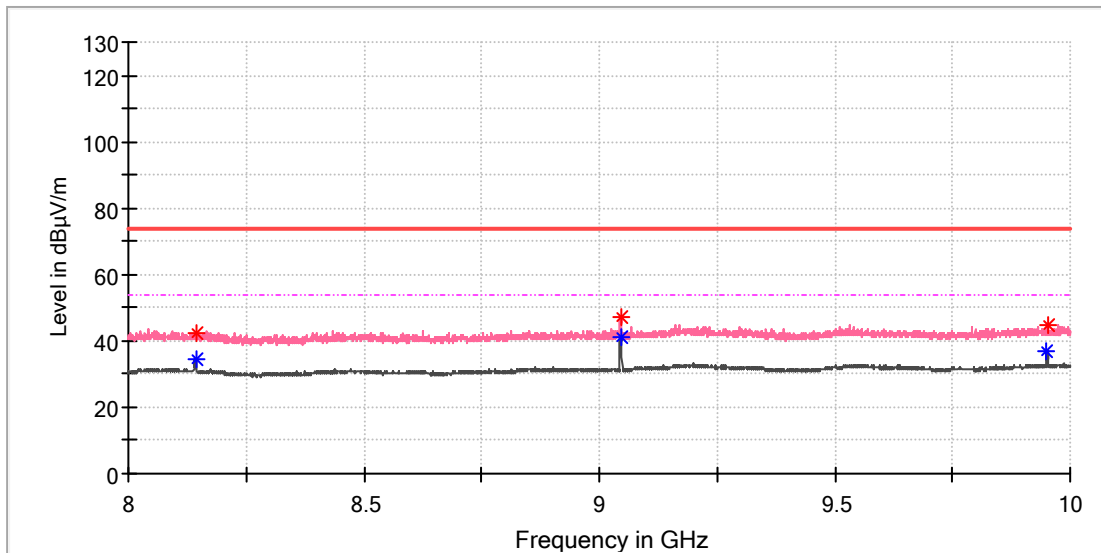


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8143.000000	---	34.70	54.00	19.30	100.0	V	0.0	8.5
8144.000000	42.53	---	74.00	31.47	100.0	V	355.0	8.5
9046.500000	---	41.38	54.00	12.62	100.0	V	112.0	9.0
9047.000000	47.03	---	74.00	26.98	100.0	V	0.0	9.0
9951.000000	---	36.80	54.00	17.20	100.0	V	340.0	10.4
9951.500000	44.74	---	74.00	29.26	100.0	V	348.0	10.4

### Appendix B.7: Test Results of Conducted Emission on AC Mains

#### EUT Information

EUT Name: WisLink LPWAN Concentrator  
 Model: RAK5147  
 Test Mode: Lora TX  
 Test Voltage: DC 5V via USB  
 Test By/Review By: Mac Xie/Gary Chen  
 Test Standard: FCC part 15C  
 Tem./Hum./Pressure: 24.4°C/53.6%/101kPa  
 Remark: SR1

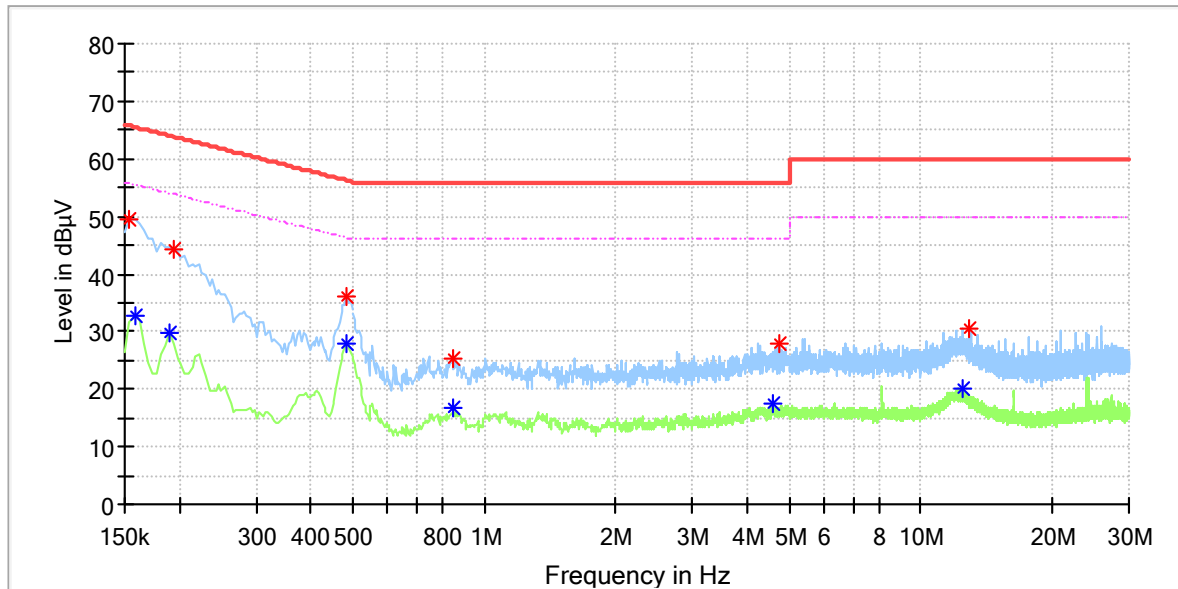


#### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.154000	49.66	---	65.78	16.12	L1	9.6
0.158000	---	32.73	55.57	22.84	L1	9.6
0.190000	---	29.60	54.04	24.44	L1	9.6
0.194000	44.45	---	63.86	19.41	L1	9.6
0.482000	---	28.08	46.31	18.23	L1	9.7
0.482000	36.27	---	56.31	20.04	L1	9.7
0.844000	25.14	---	56.00	30.86	L1	9.7
0.848000	---	16.81	46.00	29.19	L1	9.7
4.604000	---	17.52	46.00	28.48	L1	10.0
4.740000	27.97	---	56.00	28.03	L1	10.0
12.460000	---	19.94	50.00	30.06	L1	10.1
12.944000	30.48	---	60.00	29.52	L1	10.1

### EUT Information

EUT Name:	WisLink LPWAN Concentrator
Model:	RAK5147
Test Mode:	Lora TX
Test Voltage:	DC 5V via USB
Test By/Review By:	Mac Xie/Gary Chen
Test Standard:	FCC part 15C
Tem./Hum./Pressure:	24.4°C/53.6%/101kPa
Remark:	SR1

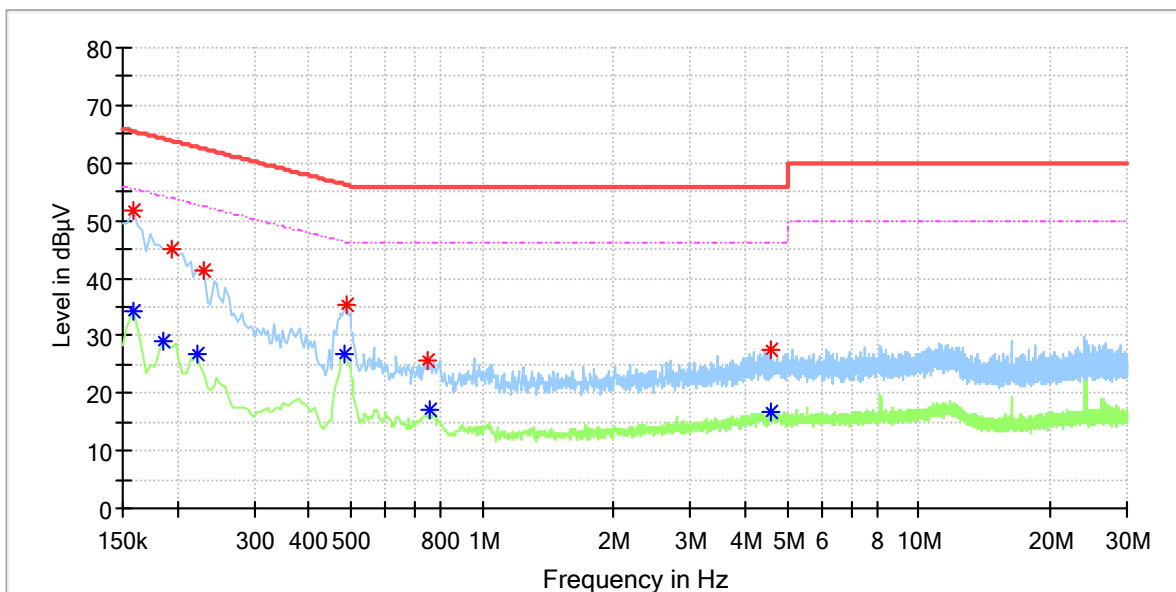

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.158000	51.89	---	65.57	13.68	N	9.6
0.158000	---	34.13	55.57	21.44	N	9.6
0.186000	---	28.99	54.21	25.22	N	9.6
0.194000	44.93	---	63.86	18.93	N	9.6
0.222000	---	26.96	52.74	25.78	N	9.6
0.230000	41.33	---	62.45	21.12	N	9.6
0.482000	---	26.63	46.31	19.67	N	9.7
0.490000	35.35	---	56.17	20.82	N	9.7
0.752000	25.57	---	56.00	30.43	N	9.7
0.756000	---	17.14	46.00	28.86	N	9.7
4.560000	---	16.64	46.00	29.36	N	10.0
4.592000	27.66	---	56.00	28.34	N	10.0