



**FCC Part 15, Subpart C, Section 15.247**

**Test Report**

**On**

**Blink Sync Module  
FCC ID: 2AF77-H1621502**

**Customer Name:** Immedia Semiconductor

**Customer P.O.:** 1001

**Date of Report:** January 5, 2017

**Test Report No.:** R-6151N-1

**Test Start Date:** November 14, 2016

**Test Finish Date:** November 17, 2016

**Test Technician:** M. Seamans

**Report Approved By:** S. Wentworth

**Report Prepared By:** J. Ramsey

Our letters, procedures and reports are for the exclusive use of the customer to whom they are addressed and their communication or the use of the name of Retlif Testing Laboratories must receive our prior written approval. Our letters, procedures and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The letters, procedures and reports and the name of Retlif Testing Laboratories or insignia are not to be used under any circumstances in advertising to the general public. This test report shall not be reproduced, except in full, without the written approval of Retlif Testing Laboratories.

### Technical Information

**Report Number:** R-6151N-1

**Customer:** Immedia Semiconductor

**Address:** 100 Burt Road, Suite 100  
Andover, MA 01810

**Manufacturer:** Immedia Semiconductor

**Manufacturer Address:** 100 Burt Road, Suite 100  
Andover, MA 01810

**Test Sample:** Blink Sync Module

**Model Number:** BSM00201U

**Serial Numbers:** IMS0606441600004 & IMS0606441600030

**FCC ID:** 2AF77-HI621502

**Type:** Frequency Hopping Spread Spectrum Transmitter

**Power Requirements:** 5VDC via 120 VAC, 60 Hz AC/DC Power Adapter

**Power Supply:** AC Adapter, Sunun, Model: SA68-050100U

**Frequency of Operation:** 902.3 MHz to 927.6 MHz

**Equipment Class:** DSS

**Antenna Type:** Internal PCB Antenna – 1.5 dBi gain

**Equipment Use:** Used in a Home Monitoring System

**Test Specification:**

FCC Rules and Regulations Part 15, Subpart C, Section 15.247

**Test Procedure:**

ANSI C63.4:2014  
ANSI C63.10:2013



**Retlif Testing Laboratories**

Report No. R-6151N-1

**Test Facility:**

Retlif Testing Laboratories  
 101 New Boston Road  
 Goffstown, NH 03045

FCC Registered Test Site Number: 90899

Table 1 – Tests Performed

<b>FCC Part 15, Subpart C</b>	<b>Test Method</b>
15.247(a)(1)	Channel Separation
15.247(a)(1)	20 dB Bandwidth
15.247(a)(1)(i)	Number of Channels and Occupancy Time
15.247(b)(1) and (4)	Peak Conducted Output Power
15.247(d)	Spurious Emissions, 30 MHz to 10 GHz
15.247(a)/15.209(a)	Field Strength of Spurious Emissions
15.207(a)	Conducted Emissions, Power Leads, 150 kHz to 30 MHz

Table 2 – Support Equipment

<b>Description</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Serial Number</b>
Laptop Computer	Compaq	Presario CQ60	2CE9501ZD7
Router	Asus	RT-N12	B81AH2004179
Laptop Computer	Asus	Q400A	N/A
Laptop Computer	Toshiba	Satellite P55-A5312	8D215205S



**Retlif Testing Laboratories**

Report No. R-6151N-1

## Certification and Signatures

We certify that this report is a true representation of the results obtained from the tests of the equipment stated. We further certify that the measurements shown in this report were made in accordance with the procedures indicated and vouch for the qualifications of all Retlif Testing Laboratories personnel taking them.



---

Scott Wentworth  
Branch Manager  
NVLAP Approved Signatory



---

Todd Hannemann  
EMC Test Engineer  
iNARTE Certified ATL-0255-T

### Non-Warranty Provision

The testing services have been performed, findings obtained and reports prepared in accordance with generally accepted laboratory principles and practices. This warranty is in lieu of all others, either expressed or implied.

### Non-Endorsement

This test report contains only findings and results arrived at after employing the specific test procedures and standards listed herein. It is not intended to constitute a recommendation, endorsement or certification of the product or material tested. This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.



Retlif Testing Laboratories

Report No. R-6151N-1

## Revision History

Revisions to this document are listed below; the latest revised document supersedes all previous issues of this document:

<b>Revision</b>	<b>Date</b>	<b>Pages Affected</b>
-	January 5, 2017	Original Release



**Retlif Testing Laboratories**

Report No. R-6151N-1

## Requirements and Test Results

### **Requirement:**

#### **FCC Section 15.247 (a)(1)**

#### **Channel Separation and 20 dB Bandwidth**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

- **Results:**

The carrier frequencies were separated by 400.80 kHz which exceeded the maximum 20 dB bandwidth of 376.75 kHz which complies with the requirements specified above.



**Retlif Testing Laboratories**

Report No. R-6151N-1

## Requirements and Test Results (con't)

### **FCC Section 15.247 (a)(1)(i)**

#### **Number of Channels and Occupancy Time**

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

- **Results:**

The number of hopping frequencies used was 64 and the average time of occupancy was 240.48 msec which complied with the above requirements.



**Retlif Testing Laboratories**

Report No. R-6151N-1

## Requirements and Test Results (con't)

### **FCC Section 15.247 (b)(1) and (4) Peak Conducted Output Power**

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(4) The conducted output power limit specified in Paragraph (b) of Section 15.247 is based on the use of antenna with directional gains that do not exceed 6 dBi. Except as shown in Paragraph (c) of Section 15.247, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in Paragraph (b)(1), (b)(2) and (b)(3) of Section 15.247, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

- **Results:**

The frequency hopping system utilizes a transmitting antenna with a gain of 1.5 dBi. The maximum peak conducted output power was measured to be 13.55 milliwatts and the EIRP is less than 1W.



**Retlif Testing Laboratories**

Report No. R-6151N-1



## Requirements and Test Results (con't)

### **FCC Section 15.247 (d) Spurious Emissions**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under Paragraph (b)(3) of Section 15.247, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

- **Results:**

The antenna port conducted spurious emissions comply with the requirement that the radio frequency power be at least 20 dB below the highest in band level.

In addition, Harmonic and Spurious Emissions which were found to be within the restricted bands of operation, as defined in section 15.205 (a) were found to be in compliance with the general limits specified in section 15.209 (a).



**Retlif Testing Laboratories**

Report No. R-6151N-1

**Requirements and Test Results (con't)**

**FCC Section 15.247 (a)**

**Field Strength of Spurious Radiation**

Operation under the provisions of Section 15.247 is limited to frequency hopping and digitally modulated intentional radiators that comply with the provisions stated in Section 15.247(a)(1).

**FCC Section 15.209(a)**

**Radiated Emission Limits, General Requirements**

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 3.

Table 3 - Radiated Emission Limits

<b>Frequency of Emission (MHz)</b>	<b>Field Strength (microvolts/meter)</b>	<b>Measurement Distance (meters)</b>
30 to 88	100	3
88 to 216	150	3
216 to 960	200	3
Above 960	500	3

- **Results:**

The field strength of spurious radiated emissions did not exceed the limits specified in Table 3.



**Retlif Testing Laboratories**

Report No. R-6151N-1

## Field Strength Calculation/Conversion:

The maximized field strength of the emission was obtained as follows:

$$C_R = M_R + C_F$$

Where:

$C_R$  = Corrected Reading in dB $\mu$ V/m

$M_R$  = Uncorrected Meter Reading in dB $\mu$ V

$C_F$  = Correction Factor in dB (Antenna Factor, Pre-amp + Cable Loss)

Example:

$$M_R = 15.35 \text{ dB}\mu\text{V}$$

$$C_F = 16.85 \text{ dB}$$

$$C_R = 15.35 \text{ dB}\mu\text{V} + 16.85 = 32.2 \text{ dB}\mu\text{V/m}$$

dB $\mu$ V/M is converted to uV/M for comparison to the specified limit using the formula:

$$\text{invLog dB}\mu\text{V/M}/20$$

$$32.2 \text{ dB}\mu\text{V/m} = 40.74 \text{ uV/m}$$

## RF Power Conversion:

Power readings in dBm may be converted to mW using the formula:

$$\text{InvLog dBm}/10$$

$$\text{Example: } 20\text{dBm} = 100\text{mW}$$



**Retlif Testing Laboratories**

Report No. R-6151N-1

## Requirements and Test Results (con't)

### **FCC Section 15.247 (i)**

#### **RF Exposure Limits**

Spread Spectrum Transmitters operating under 15.247 must be operated in a manner that ensures the public is not exposed to RF energy levels in excess of the commission's guidelines. Based on the transmitter power and maximum antenna gain (see calculation below) the minimum separation distance was calculated to determine the distance for acceptable MPE power density levels to meet both the Occupational/Controlled Exposure and the General Population/Uncontrolled Exposure requirements of FCC Part 1.1310. The calculation below uses the more stringent General Population MPE Limits.

$$S = \frac{PG}{4\pi Dsq}$$

D = Minimum Separation Distance in cm

S = Max allowed Power Density in mW/cmsq

Per 1.1310 For the Frequency of 928 MHz  $S = 928 / 1500 = 0.618$  mW/cmsq

Power = Max Power Input to Antenna = 13.55 mW

Gain = Max Power Gain of Antenna = 1.5 dBi = 1.41 numeric

$$0.618 \text{ mW/cmsq} = \frac{13.55 \times 1.41}{4 \times (3.14) \times D^2} = \frac{19.10}{12.56 \times D^2}$$

$$D^2 = \frac{19.10}{12.56 \times 0.618}$$

$$D = \sqrt{2.46} = 1.57 \text{ cm}$$

The test sample has an internal antenna and the minimum separation distance will always be maintained.



**Retlif Testing Laboratories**

Report No. R-6151N-1

**Requirement:**

**FCC Section 15.207(a) - Conducted Limits**

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits shown in Table 4, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of the paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Table 4 - Conducted Emission Limits

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

\*Decreases due to logarithm of the frequency

- **Results:**

The conducted emissions observed did not exceed the limits specified in Table 4.



**Retlif Testing Laboratories**

Report No. R-6151N-1

## Equipment List

### FCC Section 15.247(a)(1) Channel Separation

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5039	FLUKE	ATTENUATOR, COAXIAL	20 dB, DC - 12.4 GHz	Y9305	12/2/2015	12/31/2016
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/21/2016	10/31/2017

### FCC Section 15.247(a)(1) 20 dB Bandwidth

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5039	FLUKE	ATTENUATOR, COAXIAL	20 dB, DC - 12.4 GHz	Y9305	12/2/2015	12/31/2016
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/21/2016	10/31/2017

### FCC Section 15.247 (a)(1) (iii) Number of Channels and Occupancy Time

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5039	FLUKE	ATTENUATOR, COAXIAL	20 dB, DC - 12.4 GHz	Y9305	12/2/2015	12/31/2016
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/21/2016	10/31/2017

### FCC Section 15.247 (a)(1) Peak Conducted Output Power

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5039	FLUKE	ATTENUATOR, COAXIAL	20 dB, DC - 12.4 GHz	Y9305	12/2/2015	12/31/2016
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/21/2016	10/31/2017

### FCC Section 15.247 (d) Conducted Spurious Emissions, 30 MHz to 10 GHz

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5039	FLUKE	ATTENUATOR, COAXIAL	20 dB, DC - 12.4 GHz	Y9305	12/2/2015	12/31/2016
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/21/2016	10/31/2017



Retlif Testing Laboratories

Report No. R-6151N-1

**FCC Section 15.247 (a) / 15.209(a)  
Field Strength of Spurious Radiated Emissions**

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
1232	AGILENT / HP	PRE-AMPLIFIER	1 - 26.5 GHz	8449B	6/16/2016	6/30/2017
3258	ETS / EMCO	ANTENNA, DOUBLE RIDGED GUIDE	1 - 18 GHz	3115	10/13/2016	4/30/2018
3427B	ETS / EMCO	ANTENNA, BICONICAL	20 - 200 MHz	3104	2/5/2016	8/31/2017
4029B	RETLIF	OPEN AREA TEST SITE, ATTENUATION	3 / 10 Meters	RNH	4/13/2016	4/30/2018
443	ELECTRO-METRICS	ANTENNA, LOG PERIODIC	200 MHz - 1000 MHz	LPA-25	10/6/2016	4/30/2018
5070E	MICRO-COAX	CABLE, COAXIAL	10 KHz - 18 GHz	UFB311A2-1800-50U50U	5/27/2016	5/31/2017
5179B	MICRO-COAX	CABLE, COAXIAL	10 kHz - 18 GHz	UFB311A-1-036050U50U	10/7/2016	10/31/2017
R469	AGILENT / HP	ANALYZER, SPECTRUM	100 Hz - 26.5 GHz	E7405A;A	11/17/2015	11/30/2016

**FCC Section 15.207 (a)  
AC Line Conducted Emissions**

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5030B	NARDA MICROWAVE	ATTENUATOR, COAXIAL	10 dB, DC - 12.4 GHz	757C-10	3/16/2016	3/31/2017
5070	ROHDE & SCHWARZ	RECEIVER, EMI	20 Hz - 40 GHz	ESIB40	10/21/2016	10/31/2017
5188	Cybertron	COMPUTER, CONTROL	N/A	TSVQJA2221	No Calibration Required	
5209	SOLAR ELECTRONICS	LISN	50 uH, 150 kHz - 30 MHz	21106-50-BP-25-BNC	3/23/2016	3/31/2017
5210	SOLAR ELECTRONICS	LISN	50 uH, 150 kHz - 30 MHz	21106-50-BP-25-BNC	3/23/2016	3/31/2017



**Retlif Testing Laboratories**

Report No. R-6151N-1

**Test Photographs  
Channel Separation**



Test Setup



**Retlif Testing Laboratories**

Report No. R-6151N-1



**FCC Section 15.247(a)(1)  
Channel Separation  
Test Data**




**Retlif Testing Laboratories**

Report No. R-6151N-1

# RETLIF TESTING LABORATORIES

<b>Test Method:</b>	Channel Carrier Frequency Separation		
<b>Customer</b>	Immedia Semiconductor	<b>Job No.</b>	R-6151N-1
<b>Test Sample</b>	Blink Sync Module		
<b>Model Number</b>	BSM00201U	<b>Serial No.</b>	IMS0606441600004
<b>Operating Mode</b>	Transmitting hopping frequency data		
<b>Test Specification</b>	FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)		
<b>Technician</b>	M. Seamans	<b>Date</b>	November 14 <sup>th</sup> , 2016
<b>Climatic Conditions</b>	Temp: 20.0 °C    Relative Humidity: 28.0 %		
<b>Notes</b>	Channel Carrier Frequency Separation: 400.80 kHz		

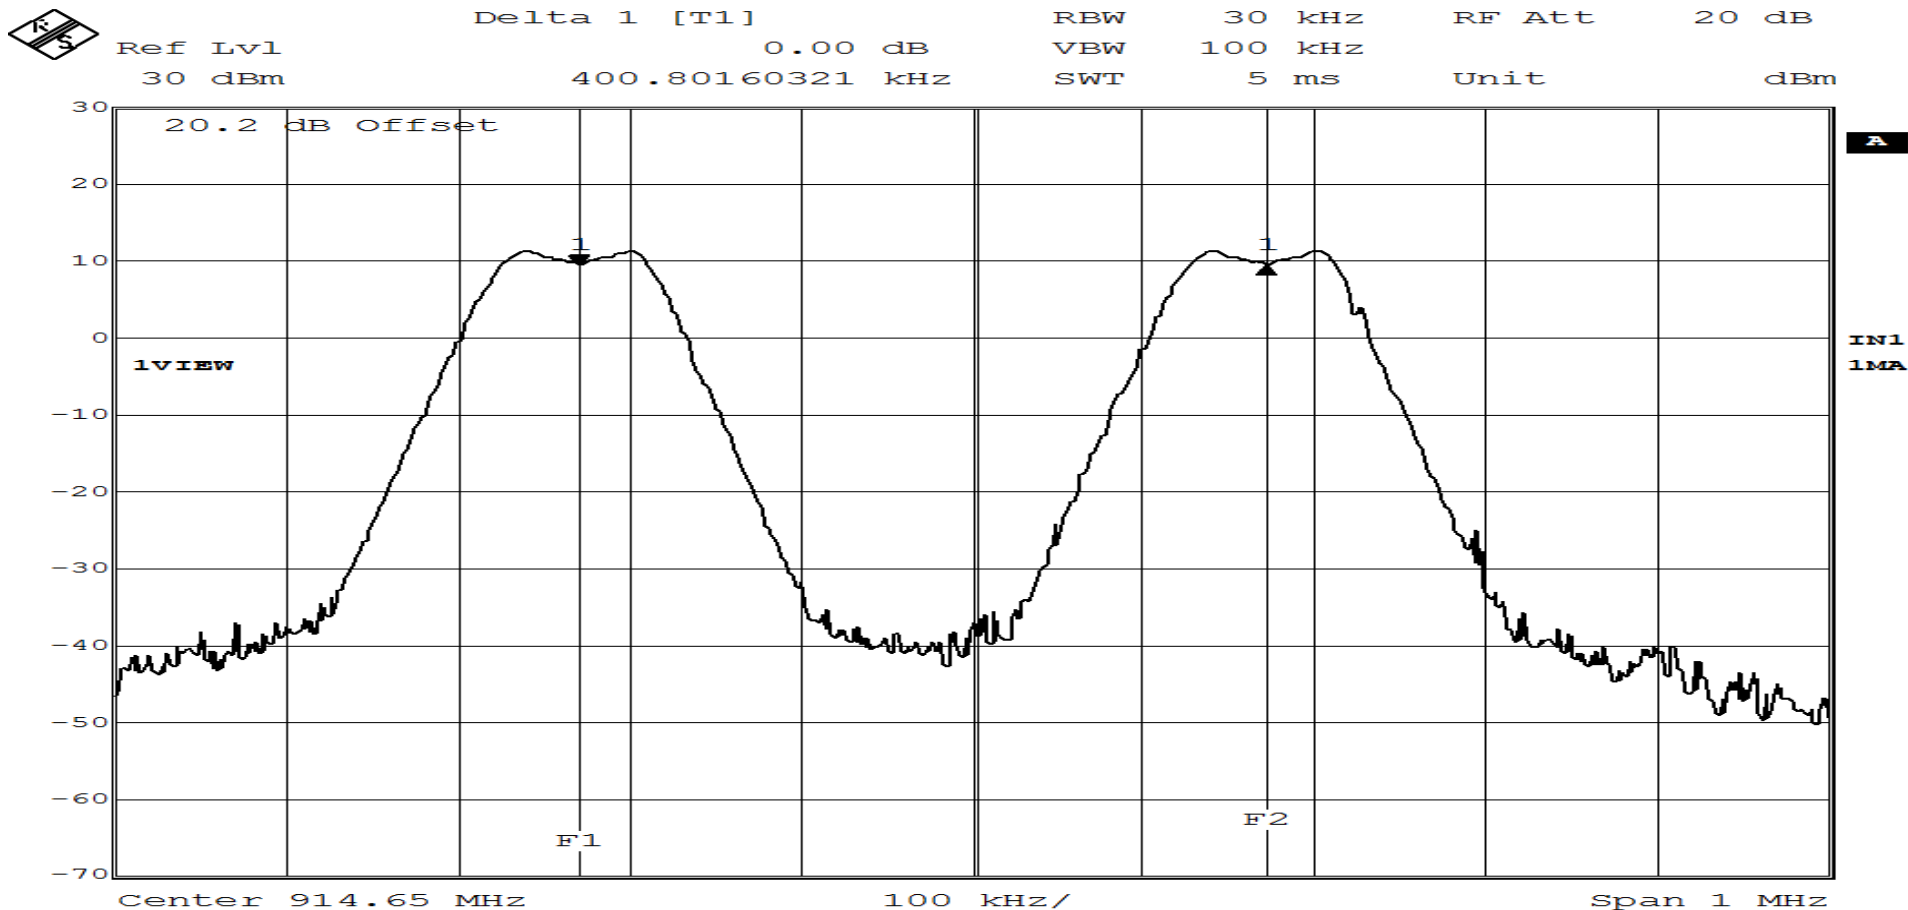

**Test Photographs**  
**20 dB Bandwidth**



Test Setup



**Retlif Testing Laboratories**

Report No. R-6151N-1

**FCC Section 15.247(a)(1)  
20 dB Bandwidth  
Test Data**




**Retlif Testing Laboratories**

Report No. R-6151N-1

# RETLIF TESTING LABORATORIES

<b>Test Method:</b>	20dB Bandwidth		
<b>Customer</b>	Immedia Semiconductor	<b>Job No.</b>	R-6151N-1
<b>Test Sample</b>	Blink Sync Module		
<b>Model Number</b>	BSM00201U	<b>Serial No.</b>	IMS0606441600004
<b>Operating Mode</b>	Transmitting modulated signal		
<b>Test Specification</b>	FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)		
<b>Technician</b>	M. Seamans	<b>Date</b>	November 14 <sup>th</sup> , 2016
<b>Climatic Conditions</b>	Temp: 20.0 °C    Relative Humidity: 28.0%		
<b>Notes</b>	Transmit Frequency: 902.37 MHz    20dB Bandwidth: 372.75 kHz		

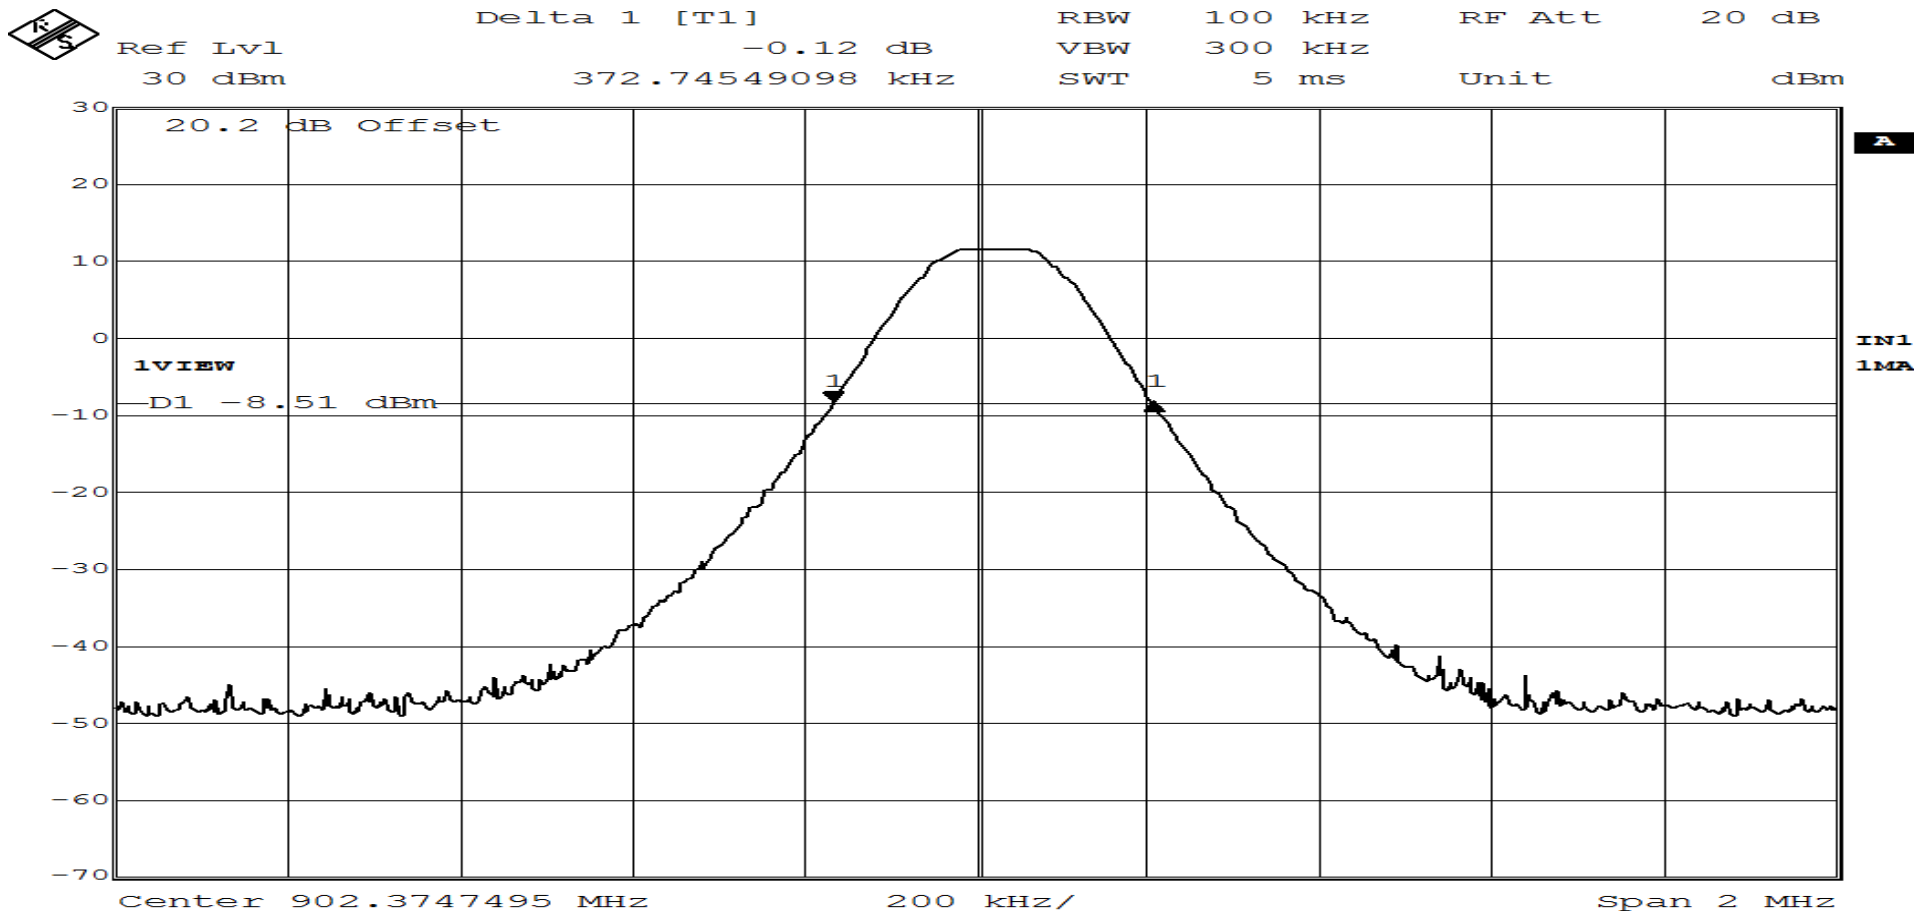


# RETLIF TESTING LABORATORIES

<b>Test Method:</b>	20dB Bandwidth		
<b>Customer</b>	Immedia Semiconductor	<b>Job No.</b>	R-6151N-1
<b>Test Sample</b>	Blink Sync Module		
<b>Model Number</b>	BSM00201U	<b>Serial No.</b>	IMS0606441600004
<b>Operating Mode</b>	Transmitting modulated signal		
<b>Test Specification</b>	FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)		
<b>Technician</b>	M. Seamans	<b>Date</b>	November 14 <sup>th</sup> , 2016
<b>Climatic Conditions</b>	Temp: 20.0 °C    Relative Humidity: 28.0%		
<b>Notes</b>	Transmit Frequency: 914.82 MHz <b>20dB Bandwidth: 376.75 kHz</b>		

Delta 1 [T1]
RBW 100 kHz
RF Att 20 dB


Ref Lvl 30 dBm
-0.35 dB
VBW 300 kHz

376.75350701 kHz
SWT 5 ms
Unit dBm

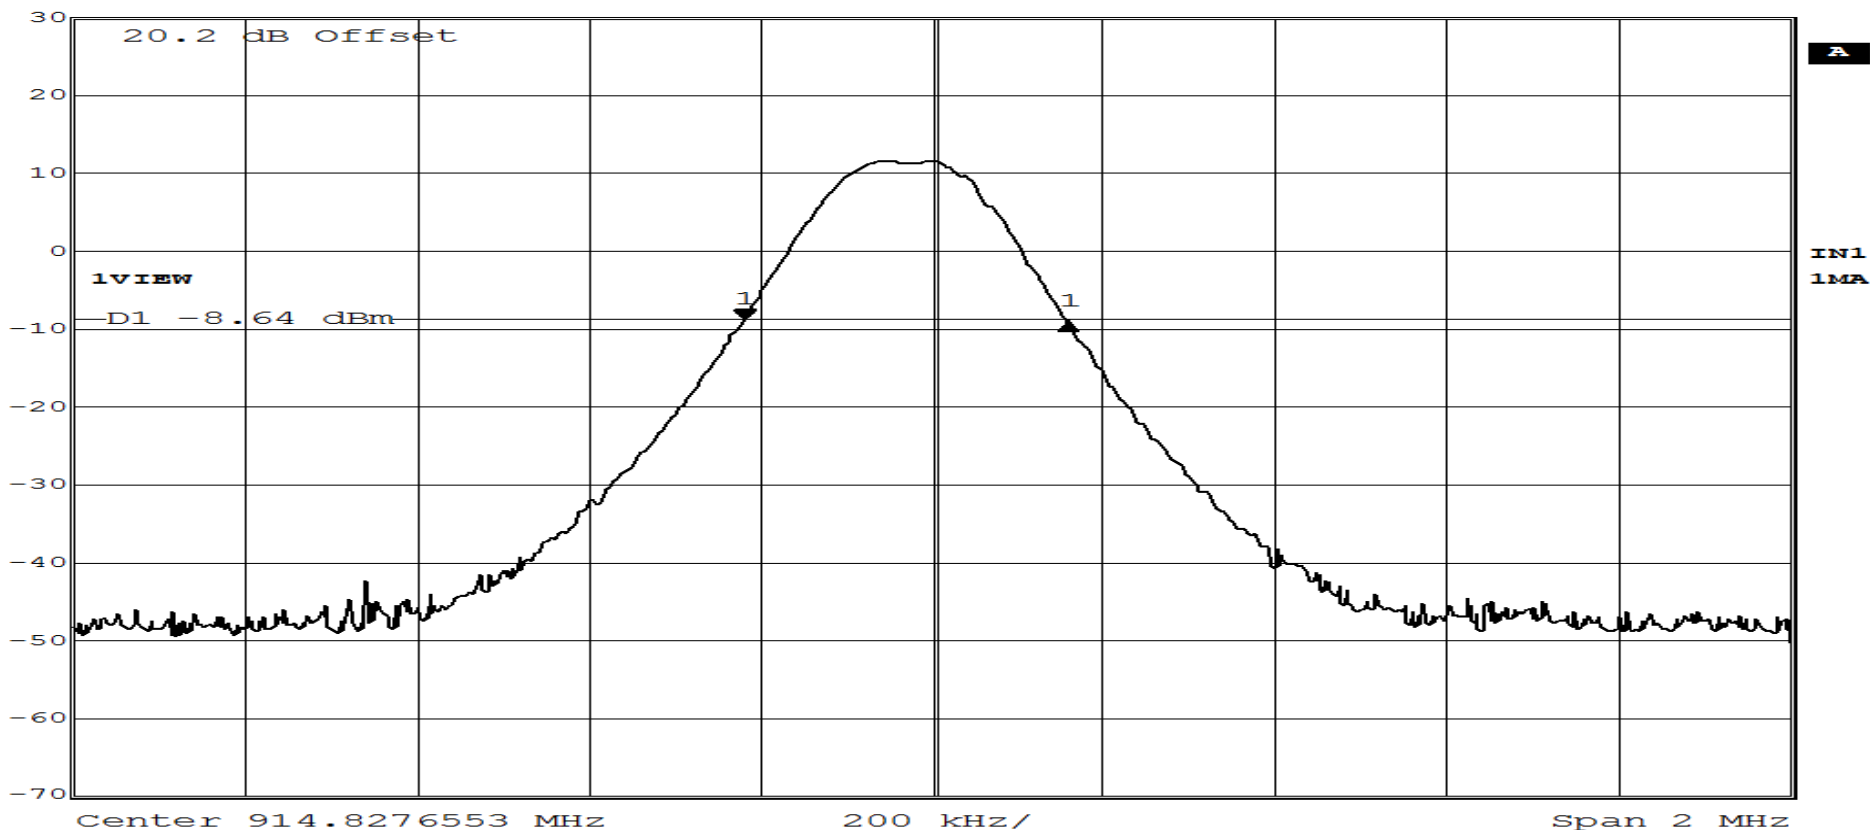

# RETLIF TESTING LABORATORIES

<b>Test Method:</b>	20dB Bandwidth		
<b>Customer</b>	Immedia Semiconductor	<b>Job No.</b>	R-6151N-1
<b>Test Sample</b>	Blink Sync Module		
<b>Model Number</b>	BSM00201U	<b>Serial No.</b>	IMS0606441600004
<b>Operating Mode</b>	Transmitting modulated signal		
<b>Test Specification</b>	FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)		
<b>Technician</b>	M. Seamans	<b>Date</b>	November 14 <sup>th</sup> , 2016
<b>Climatic Conditions</b>	Temp: 20.0 °C    Relative Humidity: 28.0 %		
<b>Notes</b>	Transmit Frequency: 927.59 MHz <b>20dB Bandwidth: 372.75 kHz</b>		

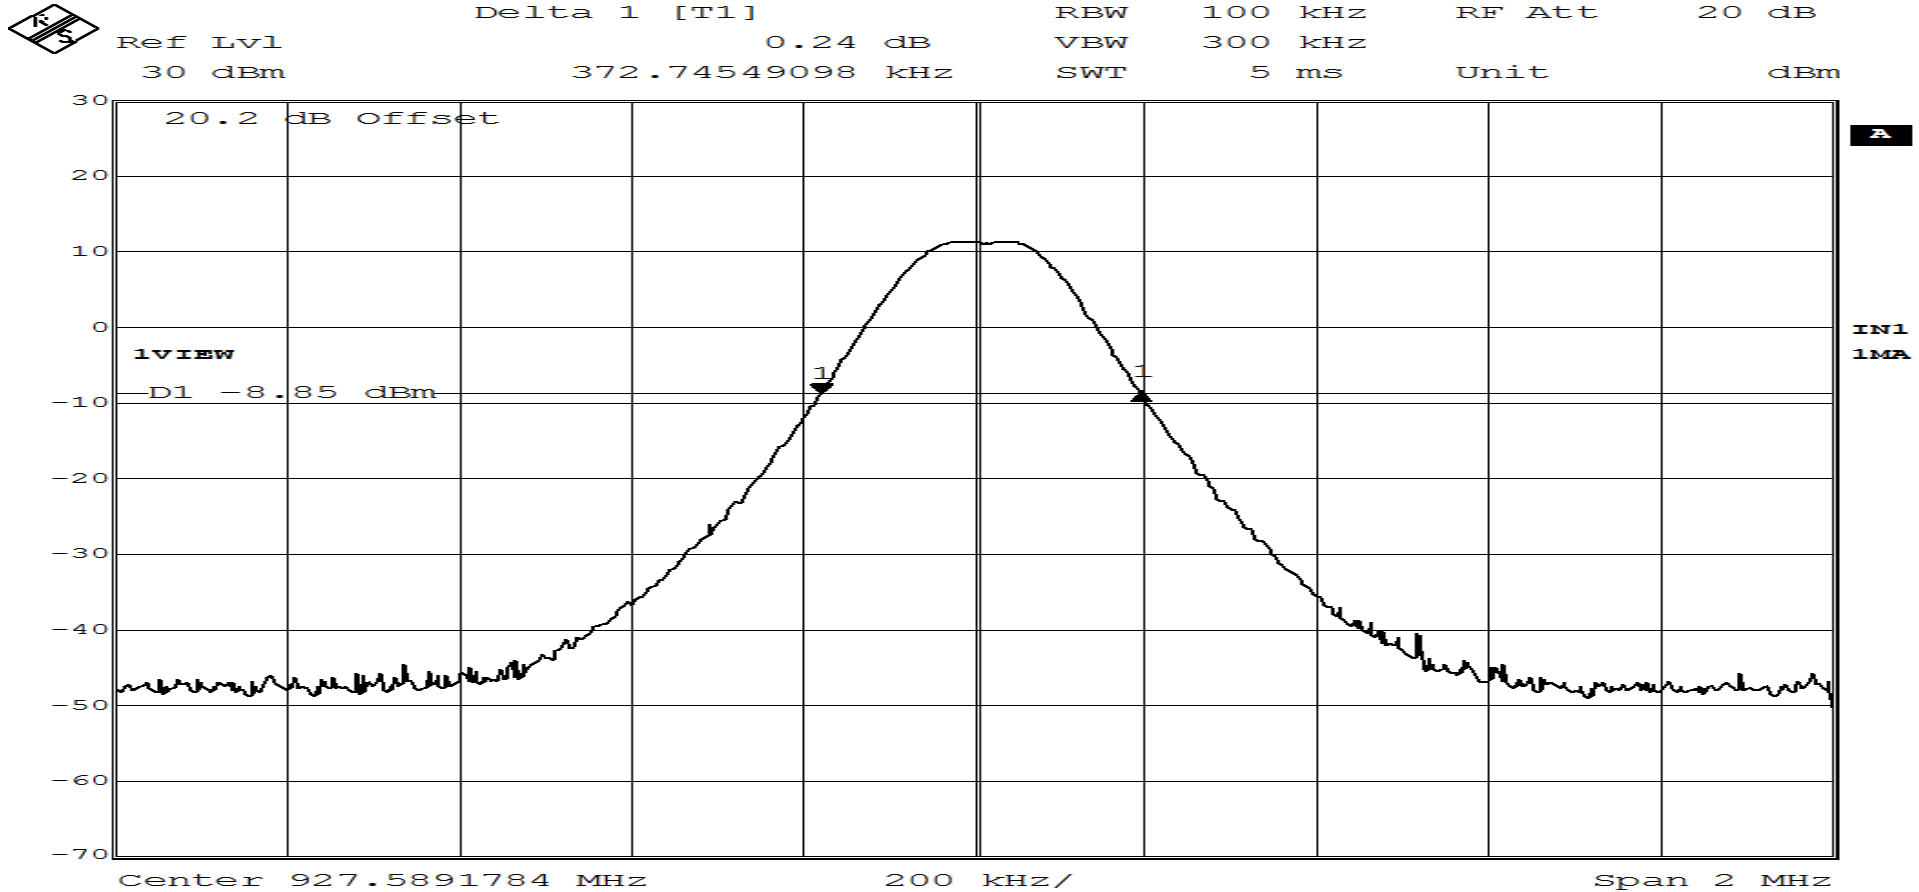

**Test Photographs**  
**Number of Channels and Occupancy Time**



Test Setup



**Retlif Testing Laboratories**

Report No. R-6151N-1



**FCC Section 15.247 (a)(1)(i)  
Number of Channels and Occupancy Time  
Test Data**



**Retlif Testing Laboratories**

Report No. R-6151N-1

**Number of Hopping Frequencies  
Test Data**



**Retlif Testing Laboratories**

Report No. R-6151N-1


# RETLIF TESTING LABORATORIES

<b>Test Method:</b>	Number of Hopping Frequencies		
<b>Customer</b>	Immedia Semiconductor	<b>Job No.</b>	R-6151N-1
<b>Test Sample</b>	Blink Sync Module		
<b>Part Number</b>	BSM00201U	<b>Serial No.</b>	IMS0606441600004
<b>Operating Mode</b>	Transmitting hopping frequency data		
<b>Test Specification</b>	FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)(i)		
<b>Technician</b>	M. Seamans	<b>Date</b>	November 14 <sup>th</sup> , 2016
<b>Climatic Conditions</b>	Temp: 20.0 °C    Relative Humidity: 28.0 %		
<b>Notes</b>	<b>Number of Hopping Frequencies: 64</b>		



Ref Lvl  
30 dBm

RBW    300 kHz    RF Att    20 dB  
 VBW    1 MHz  
 SWT    5 ms    Unit    dBm

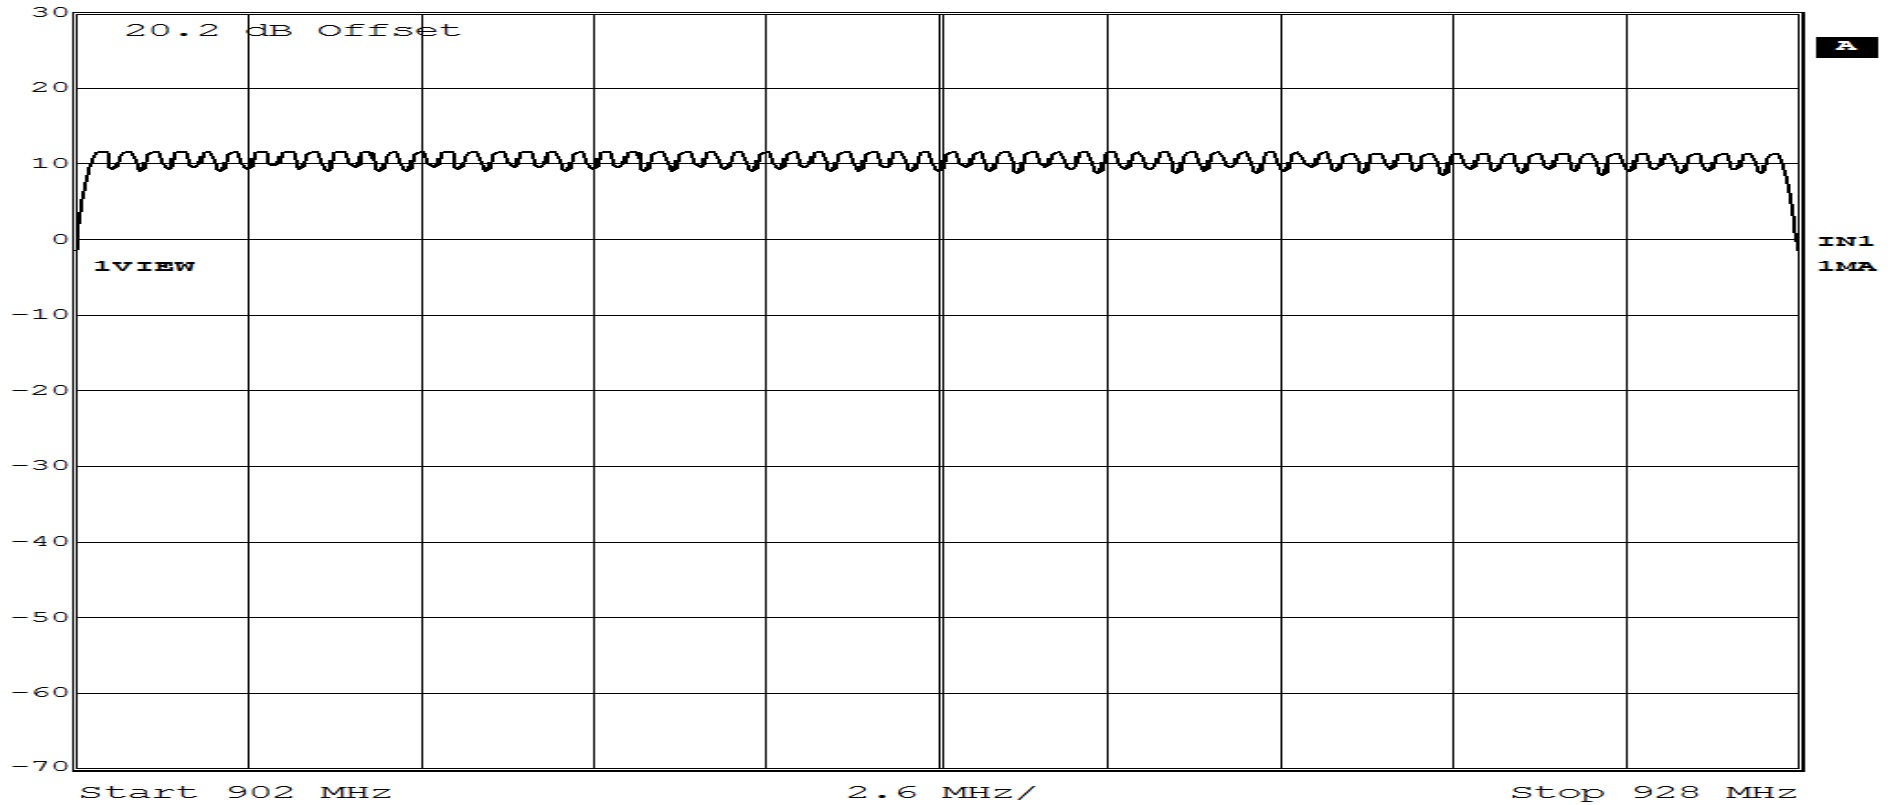

**Time of Occupancy  
Test Data**




**Retlif Testing Laboratories**

Report No. R-6151N-1

# RETLIF TESTING LABORATORIES

<b>Test Method:</b>	Time of Occupancy		
<b>Customer</b>	Immedia Semiconductor	<b>Job No.</b>	R-6151N-1
<b>Test Sample</b>	Blink Sync Module		
<b>Model Number</b>	BSM00201U	<b>Serial No.</b>	IMS0606441600004
<b>Operating Mode</b>	Transmitting hopping frequency data		
<b>Test Specification</b>	FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)(i)		
<b>Technician</b>	M. Seamans	<b>Date</b>	November 14 <sup>th</sup> , 2016
<b>Climatic Conditions</b>	Temp: 20.0 °C    Relative Humidity: 28.0 %		
<b>Notes</b>	Test Frequency: 914.76 MHz    Pulse Width: 120.240 ms		

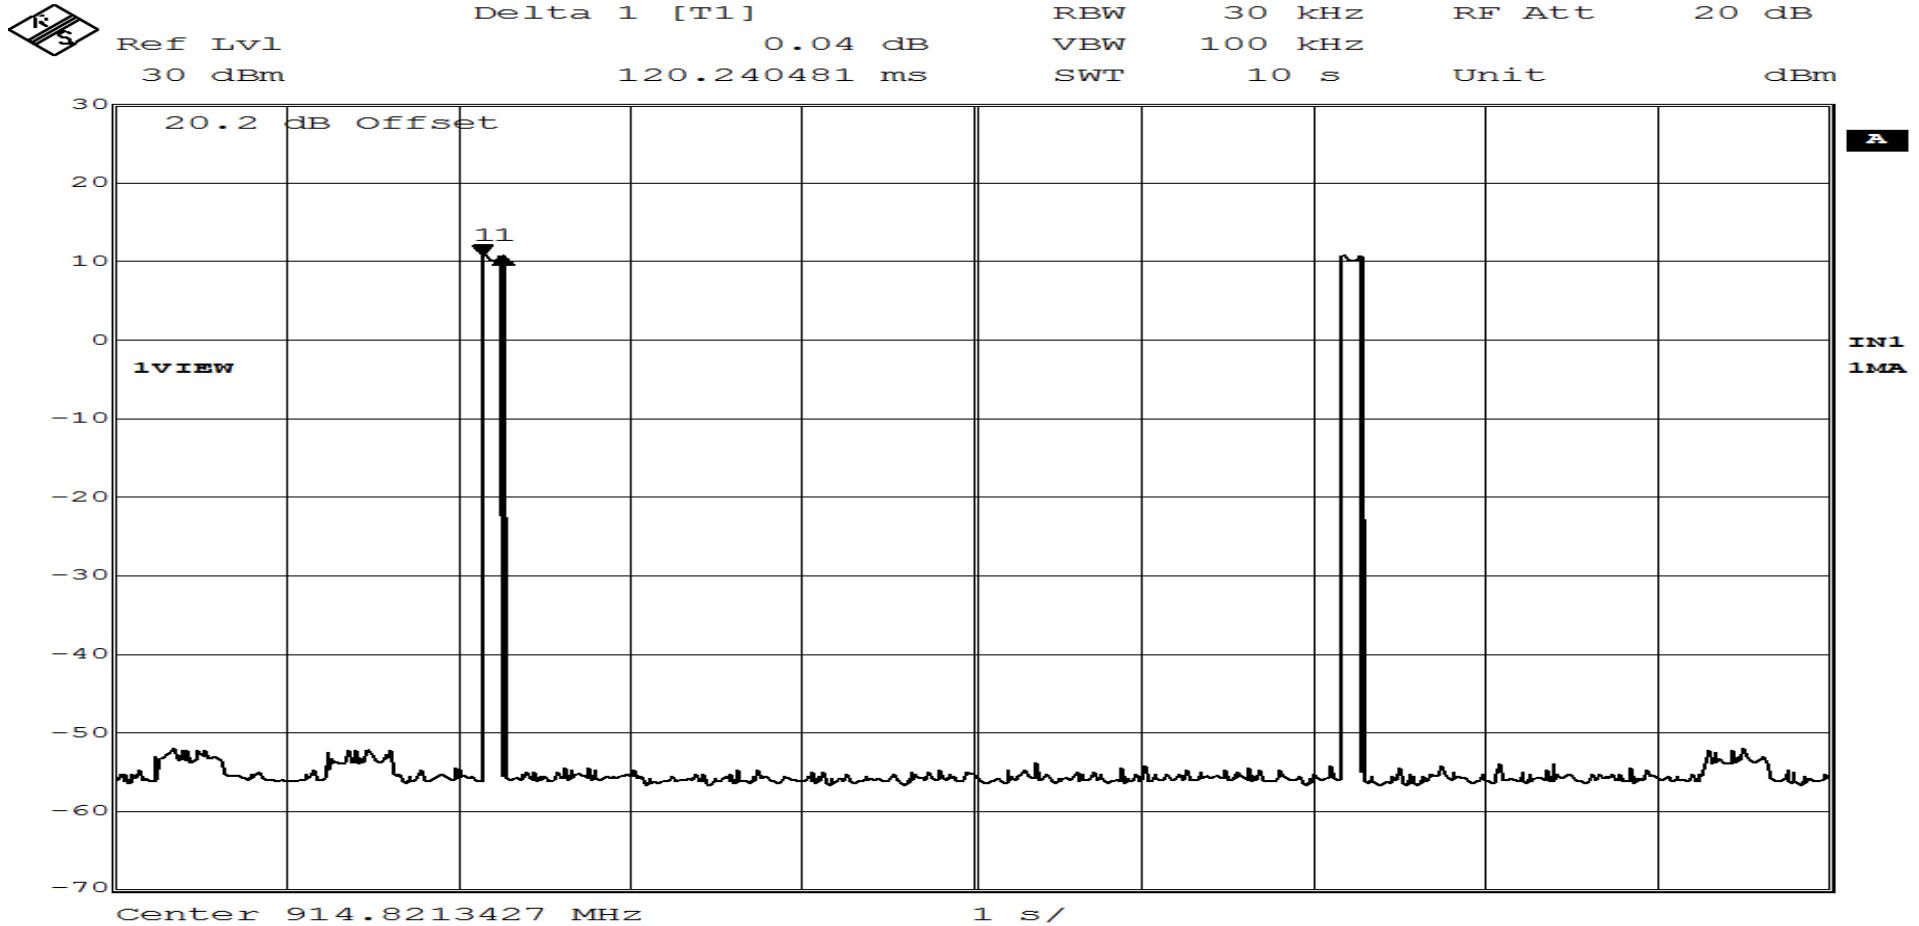


# RETLIF TESTING LABORATORIES

<b>Test Method:</b>	Time of Occupancy		
<b>Customer</b>	Immedia Semiconductor	<b>Job No.</b>	R-6151N-1
<b>Test Sample</b>	Blink Sync Module		
<b>Model Number</b>	BSM00201U	<b>Serial No.</b>	IMS0606441600004
<b>Operating Mode</b>	Transmitting hopping frequency data		
<b>Test Specification</b>	FCC Part 15, Subpart C Paragraph: 15.247 (a)(1)(i)		
<b>Technician</b>	M. Seamans	<b>Date</b>	November 14 <sup>th</sup> , 2016
<b>Climatic Conditions</b>	Temp: 20.0 °C    Relative Humidity: 28.0 %		
<b>Notes</b>	Test Frequency: 914.76 MHz    Pulse Width: 120.240 ms		

Delta 1 [T1]
RBW 30 kHz
RF Att 20 dB

Ref Lvl 0.02 dB
VBW 100 kHz

30 dBm
120.240481 ms
SWT 10 s
Unit dBm

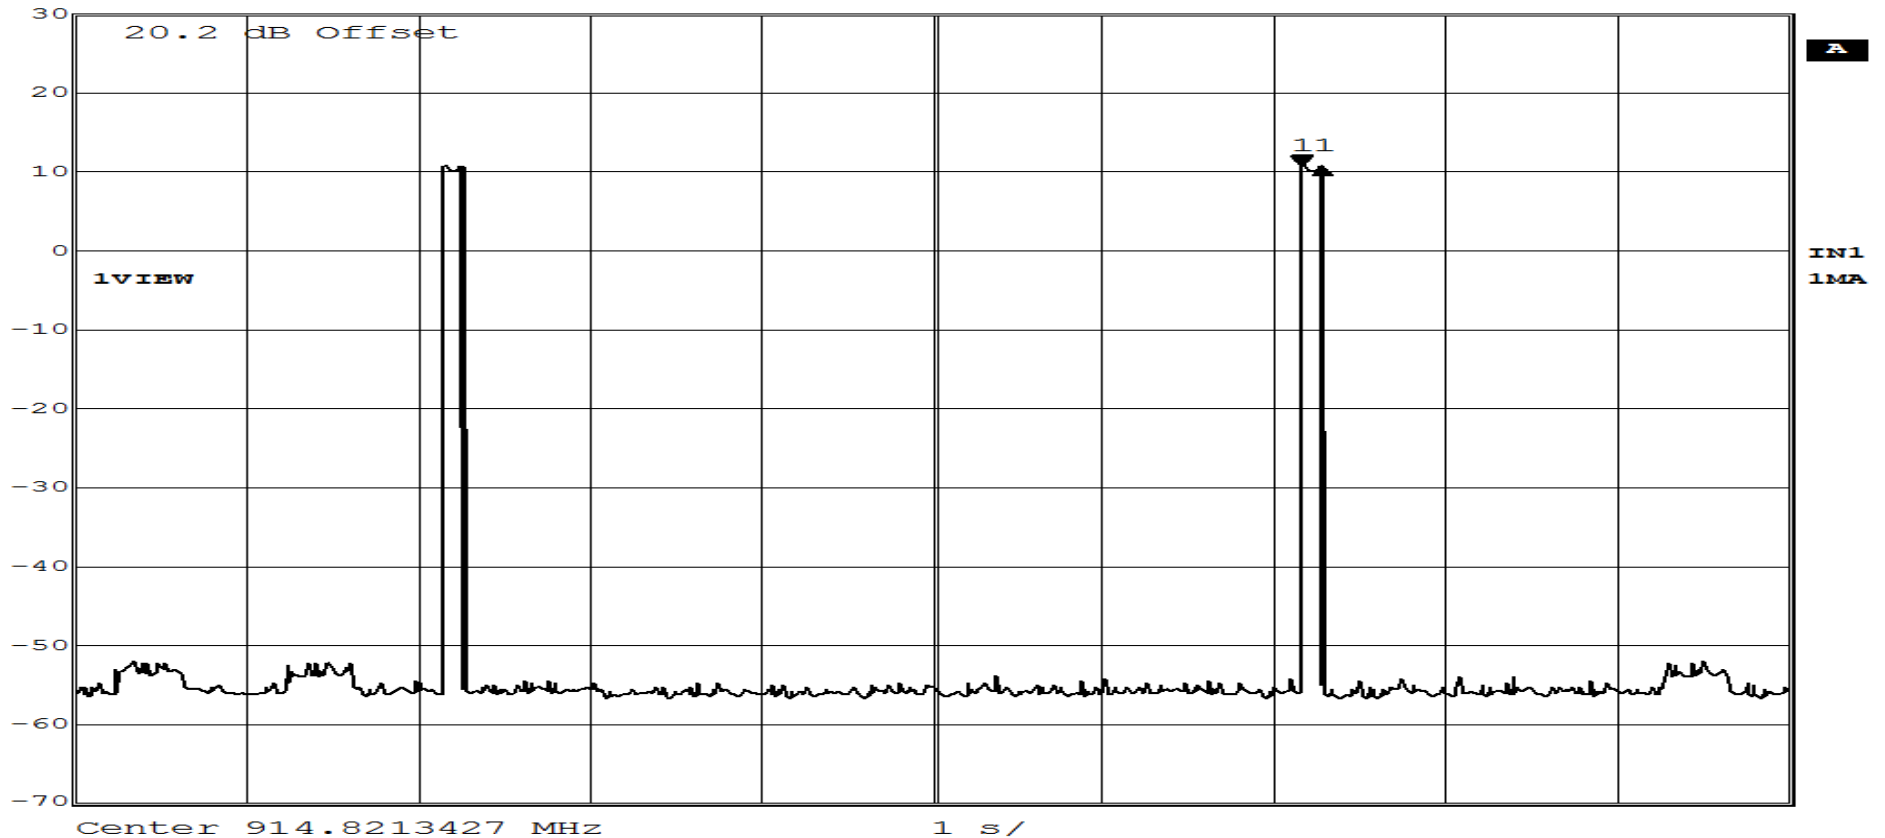

**Test Photographs**  
**Peak Conducted Output Power**



Test Setup



**Retlif Testing Laboratories**

Report No. R-6151N-1

**FCC Section 15.247 (a)(1)  
Peak Conducted Output Power  
Test Data**



**Retlif Testing Laboratories**

Report No. R-6151N-1




# RETLIF TESTING LABORATORIES

<b>Test Method</b>	Peak Power Output		
<b>Customer</b>	Immedia Semiconductor	<b>Job No.</b>	R-6151N-1
<b>Test Sample</b>	Blink Sync Module		
<b>Model Number</b>	BSM00201U	<b>Serial No.</b>	IMS0606441600004
<b>Operating Mode</b>	Transmitting modulated signal		
<b>Test Specification</b>	FCC Part 15, Subpart C Paragraph: 15.247 (b)(3)		
<b>Technician</b>	M. Seamans	<b>Date</b>	November 14 <sup>th</sup> , 2016
<b>Climatic Conditions</b>	Temp: 20.0 °C    Relative Humidity: 28.0 %		
<b>Notes</b>	Transmit Frequency: 902.37 MHz    Peak Power Output: 11.32 dBm (13.55189 mW)		




Ref Lvl	Marker 1 [T1]	RBW	500 kHz	RF Att	20 dB
30 dBm	11.32 dBm	VBW	2 MHz		
	902.37675351 MHz	SWT	5 ms	Unit	dBm

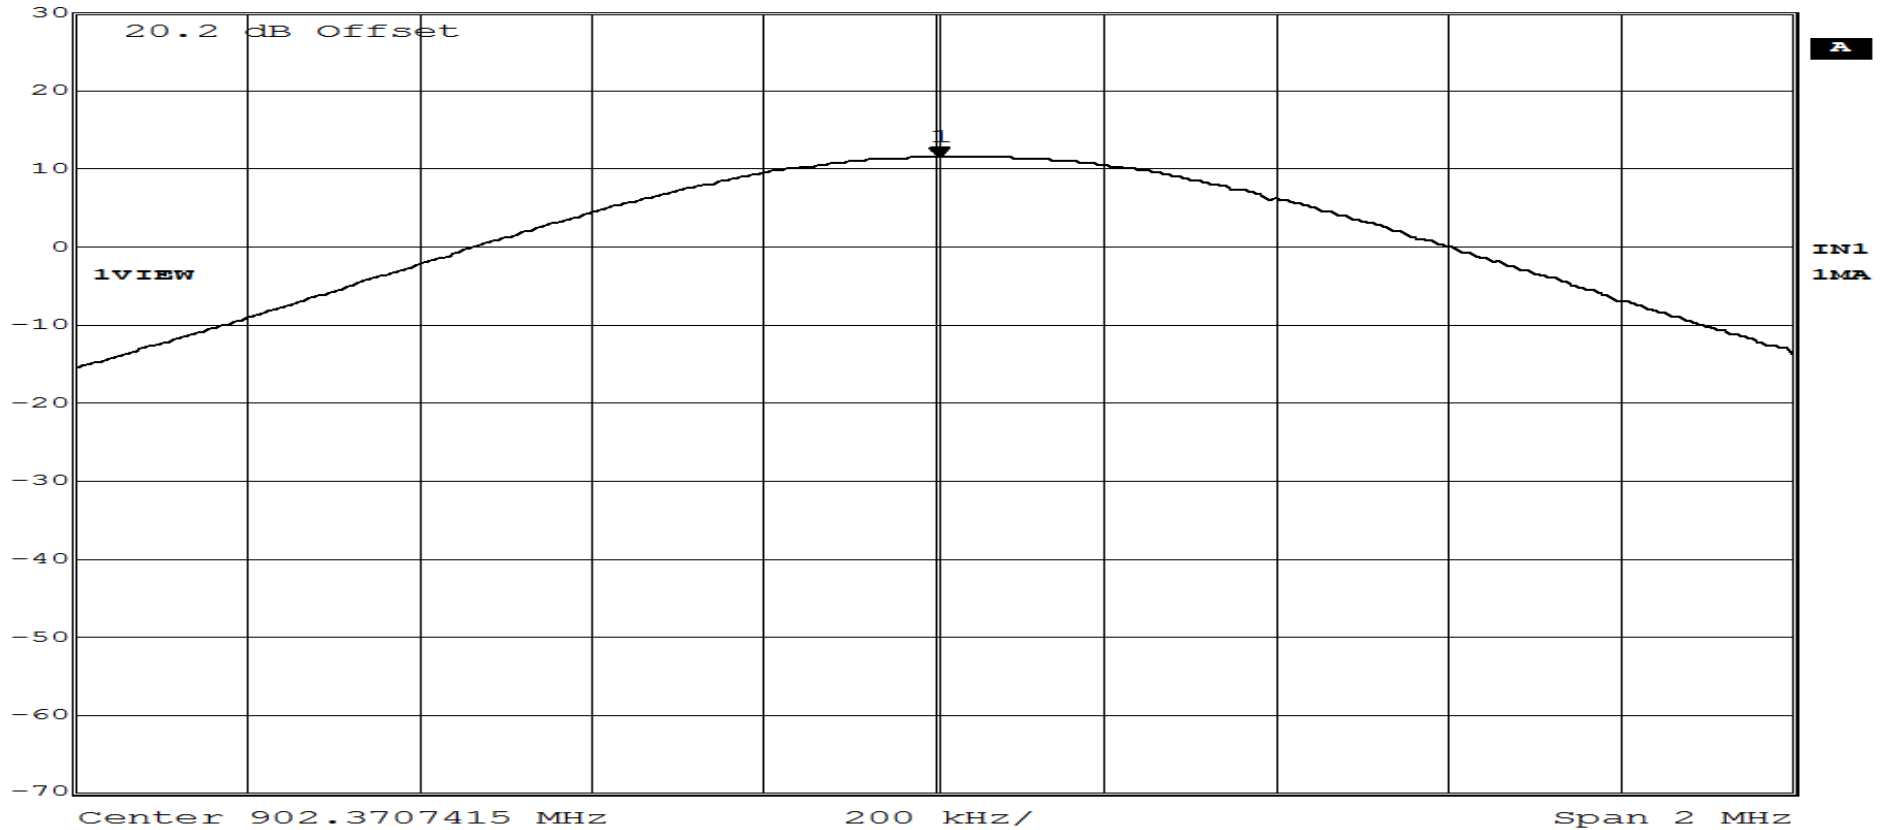

# RETLIF TESTING LABORATORIES

<b>Test Method</b>	Peak Power Output		
<b>Customer</b>	Immedia Semiconductor	<b>Job No.</b>	R-6151N-1
<b>Test Sample</b>	Blink Sync Module		
<b>Model Number</b>	BSM002014	<b>Serial No.</b>	IMS0606441600004
<b>Operating Mode</b>	Transmitting modulated signal		
<b>Test Specification</b>	FCC Part 15, Subpart C Paragraph: 15.247 (b)(3)		
<b>Technician</b>	M. Seamans	<b>Date</b>	November 14 <sup>th</sup> , 2016
<b>Climatic Conditions</b>	Temp: 20.0 °C    Relative Humidity: 28.0 %		
<b>Notes</b>	Transmit Frequency: 914.76 MHz    Peak Power Output: 11.19 dBm (13.15225 mW)		

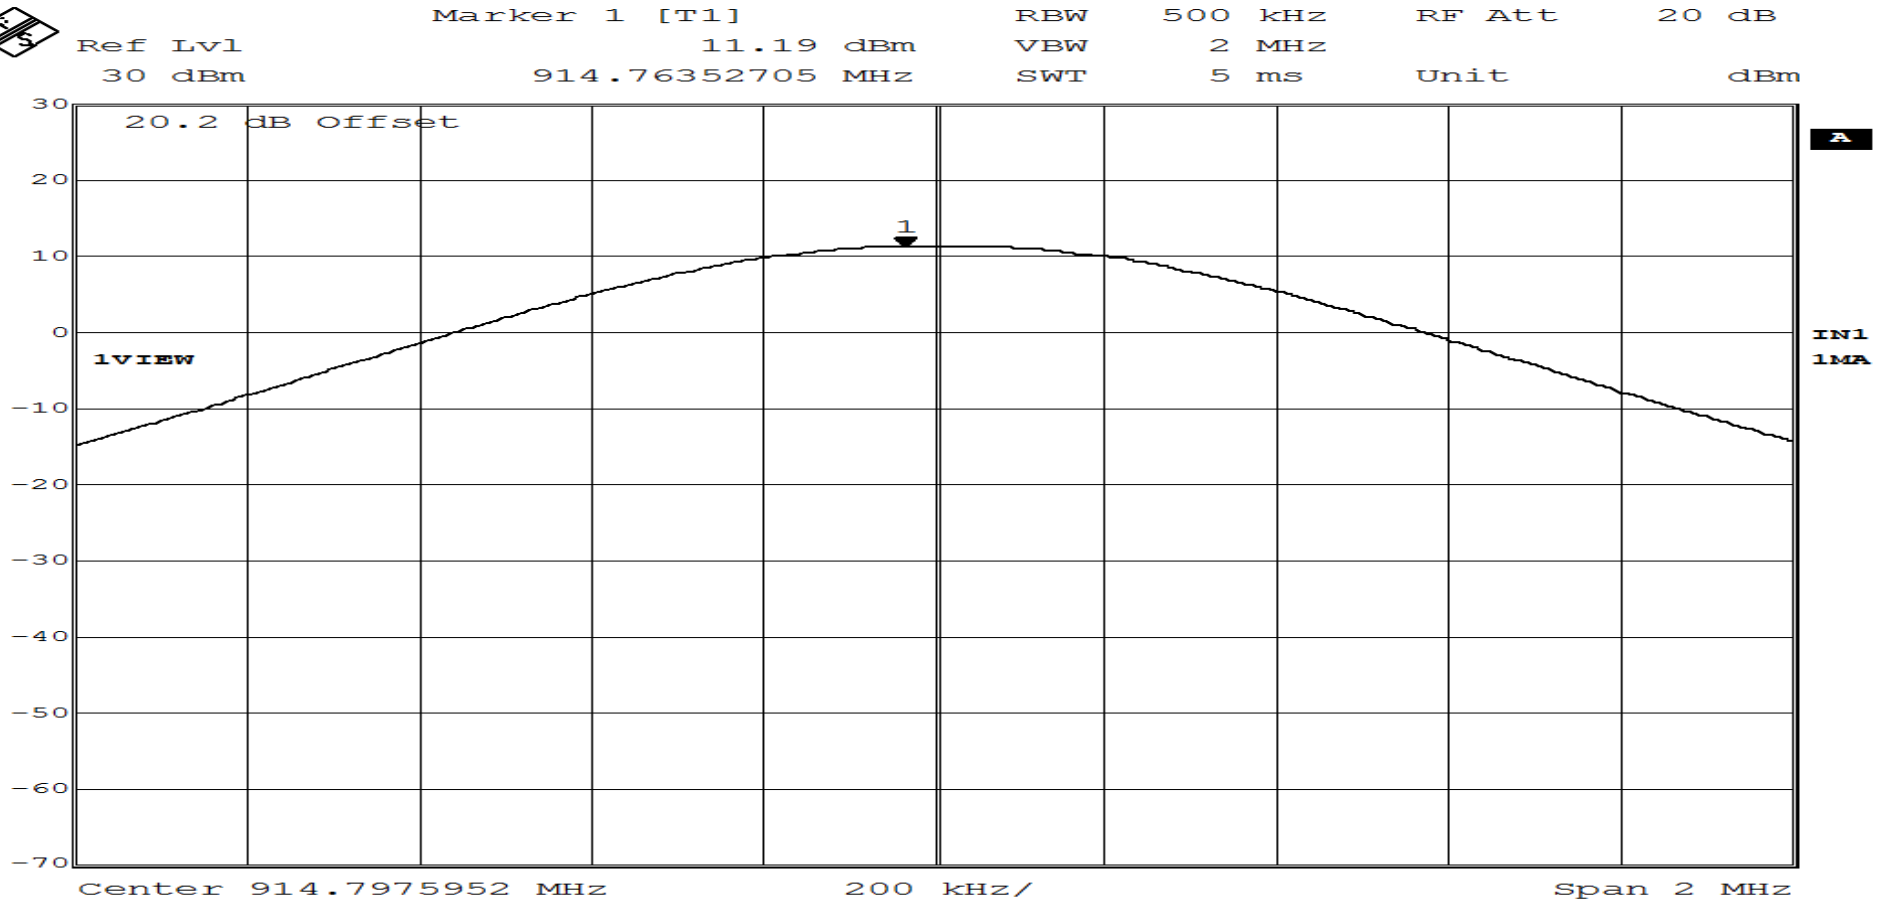


# RETLIF TESTING LABORATORIES

<b>Test Method</b>	Peak Power Output		
<b>Customer</b>	Immedia Semiconductor	<b>Job No.</b>	R-6151N-1
<b>Test Sample</b>	Blink Sync Module		
<b>Model Number</b>	BSM002014	<b>Serial No.</b>	IMS0606441600004
<b>Operating Mode</b>	Transmitting modulated signal		
<b>Test Specification</b>	FCC Part 15, Subpart C Paragraph: 15.247 (b)(3)		
<b>Technician</b>	M. Seamans	<b>Date</b>	November 14 <sup>th</sup> , 2016
<b>Climatic Conditions</b>	Temp: 20.0 °C    Relative Humidity: 32.0 %		
<b>Notes</b>	Transmit Frequency: 927.59 MHz    Peak Power Output: 10.94 dBm (12.41652 mW)		



Ref Lvl	Marker 1 [T1]	RBW	500 kHz	RF Att	20 dB
30 dBm	10.94 dBm	VBW	2 MHz		
	927.61923848 MHz	SWT	5 ms	Unit	dBm

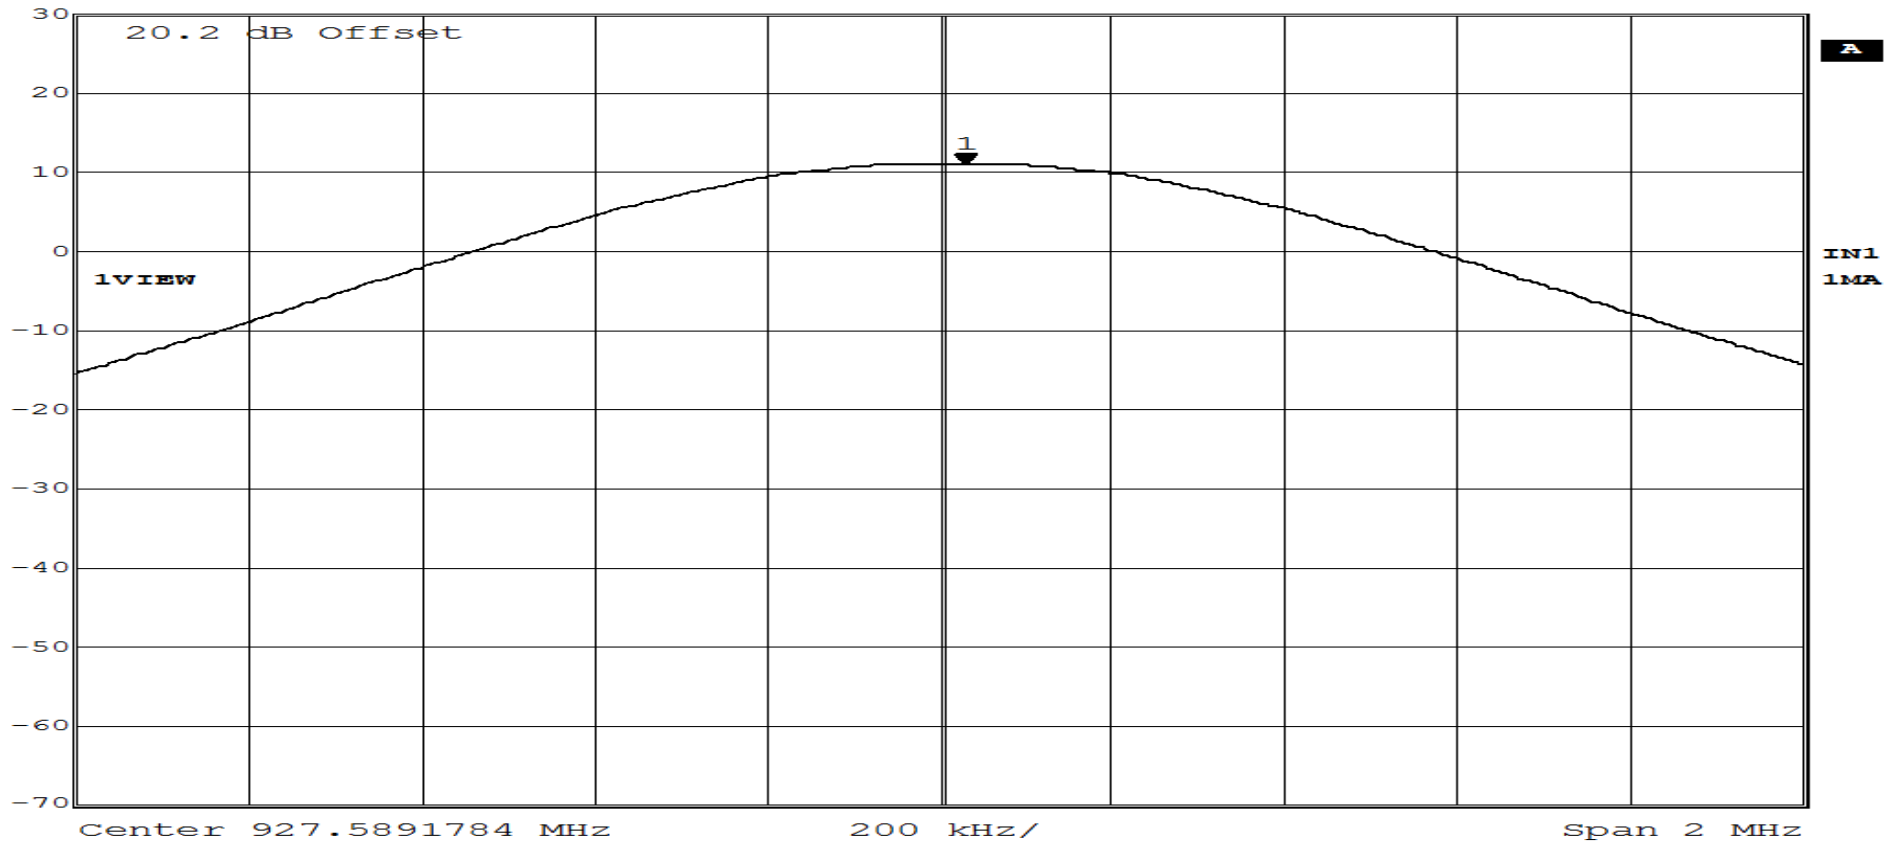

**Test Photographs**  
**Conducted Spurious Emissions, 30 MHz to 10 GHz**



Test Setup



**Retlif Testing Laboratories**

Report No. R-6151N-1

**Unwanted Emissions into Non-Restricted Frequency Bands  
25 MHz to 10 GHz  
Conducted Spurious Emissions Test Data**



**Retlif Testing Laboratories**

Report No. R-6151N-1












# RETLIF TESTING LABORATORIES

<b>Test Method</b>	Unwanted Emissions into Non-Restricted Frequency Bands		
<b>Customer</b>	Immedia Semiconductor	<b>Job No.</b>	R-6151N-1
<b>Test Sample</b>	Blink Sync Module		
<b>Model Number</b>	BSM00201U	<b>Serial No.</b>	IMS0606441600004
<b>Operating Mode</b>	Transmitting modulated signal		
<b>Test Specification</b>	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
<b>Technician</b>	M. Seamans	<b>Date</b>	November 14 <sup>th</sup> , 2016
<b>Climatic Conditions</b>	Temp: 20.0 °C    Relative Humidity: 28.0 %		
<b>Notes</b>	Transmit Frequency: 927.59 MHz <b>Limit is 20dB down from the Fundamental Frequency Peak Power Output</b>		

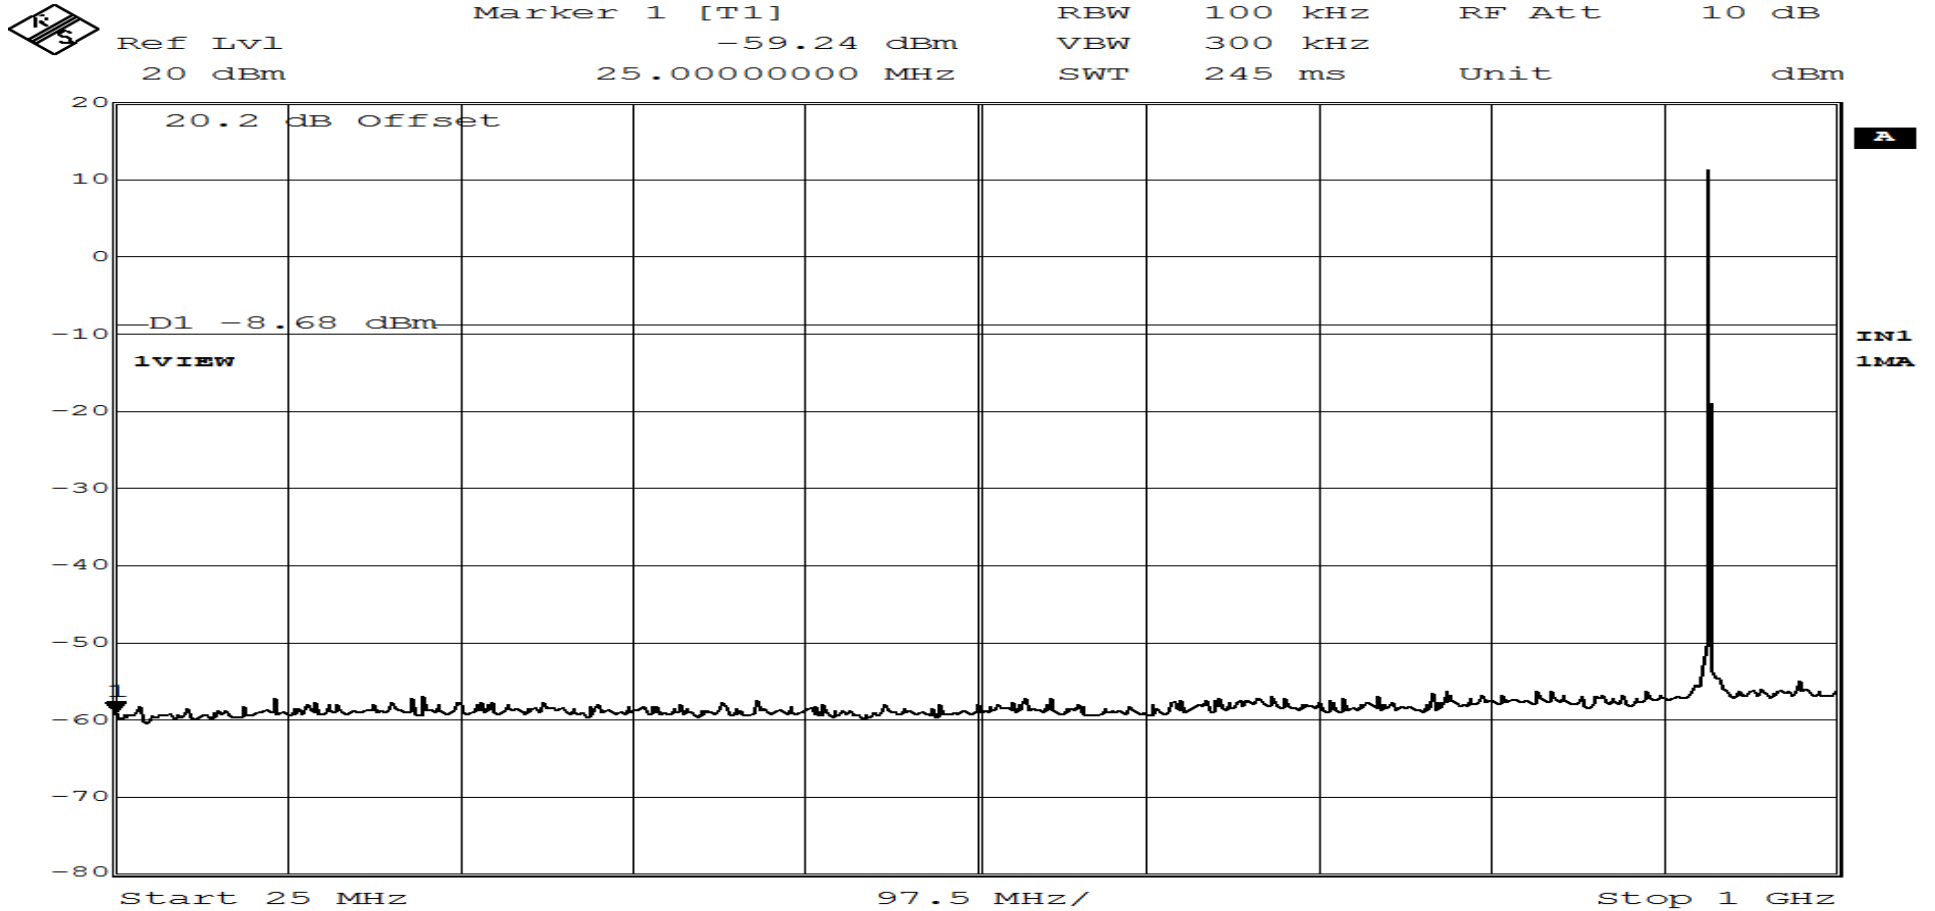



**Band Edge Emissions Conducted  
Test Data**




**Retlif Testing Laboratories**

Report No. R-6151N-1


# RETLIF TESTING LABORATORIES

<b>Test Method</b>	Band Edge Emissions Conducted		
<b>Customer</b>	Immedia Semiconductor	<b>Job No.</b>	R-6151N-1
<b>Test Sample</b>	Blink Sync Module		
<b>Model Number</b>	BSM00201U	<b>Serial No.</b>	IMS0606441600004
<b>Operating Mode</b>	Transmitting modulated signal		
<b>Test Specification</b>	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
<b>Technician</b>	M. Seamans	<b>Date</b>	November 14 <sup>th</sup> , 2016
<b>Climatic Conditions</b>	Temp: 20.0 °C    Relative Humidity: %		
<b>Notes</b>	Transmit Frequency: 902.37 MHz		

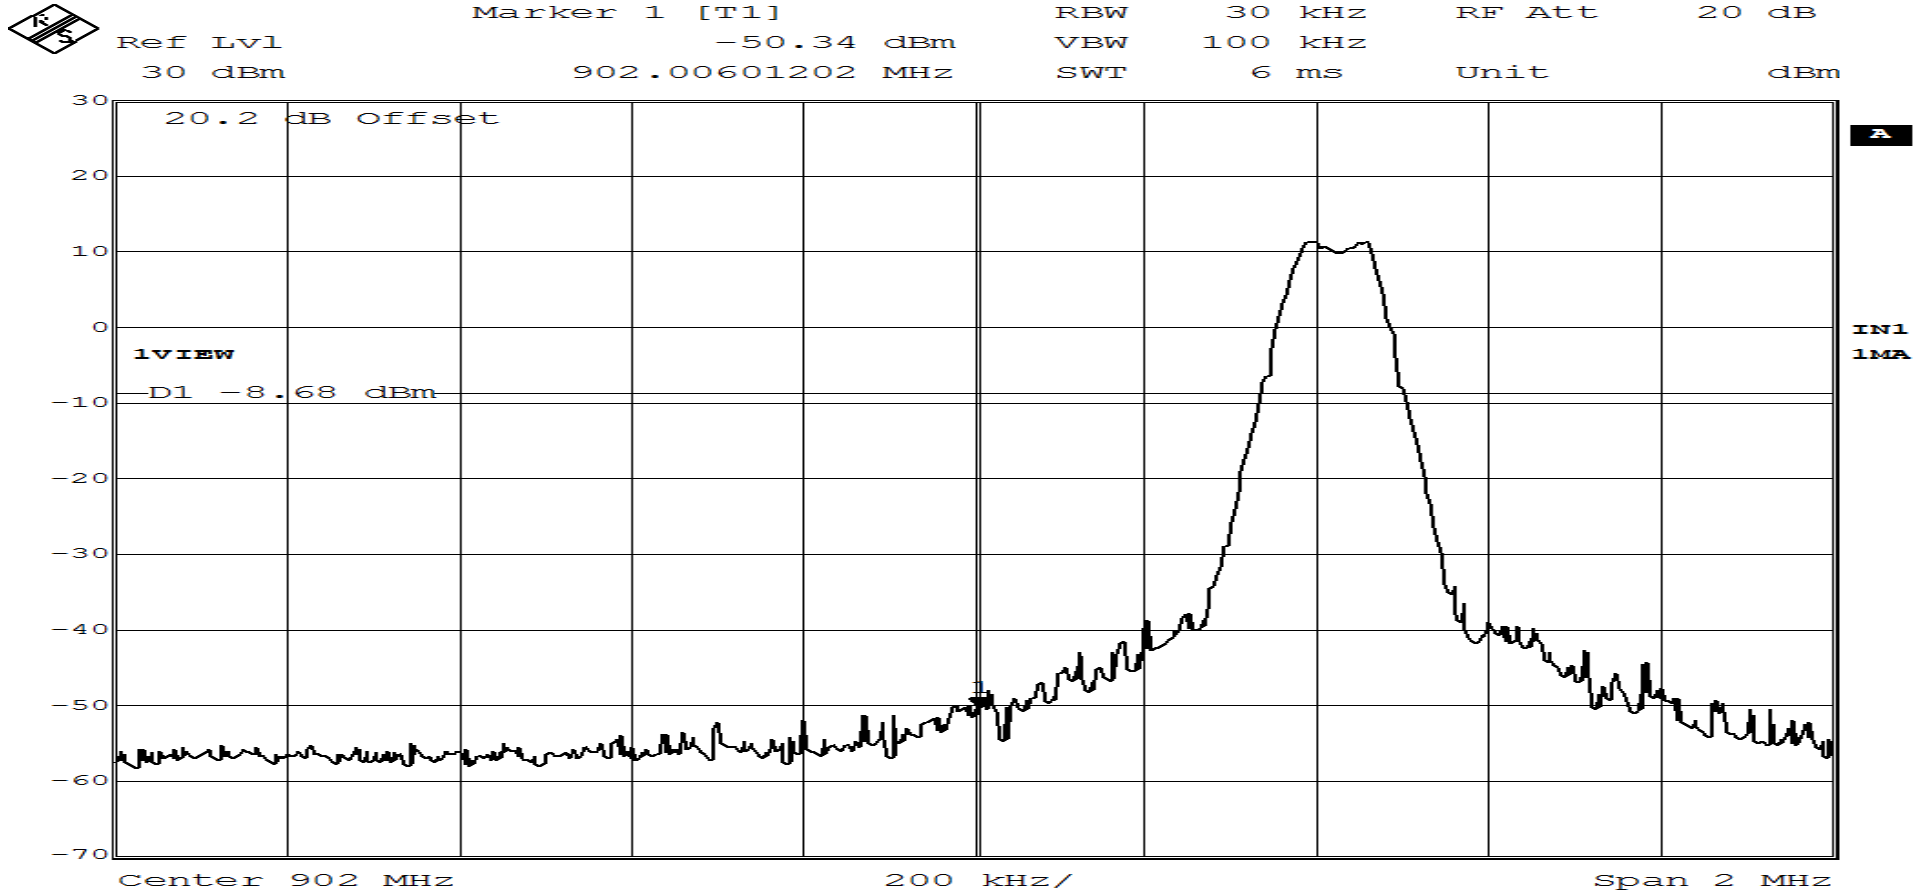


# RETLIF TESTING LABORATORIES

<b>Test Method</b>	Band Edge Emissions Conducted		
<b>Customer</b>	Immedia Semiconductor	<b>Job No.</b>	R-6151N-1
<b>Test Sample</b>	Blink Sync Module		
<b>Model Number</b>	BSM00201U	<b>Serial No.</b>	IMS0606441600004
<b>Operating Mode</b>	Transmitting modulated signal		
<b>Test Specification</b>	FCC Part 15, Subpart C Paragraph: 15.247 (d)		
<b>Technician</b>	M. Seamans	<b>Date</b>	November 14 <sup>th</sup> , 2016
<b>Climatic Conditions</b>	Temp: 20.0 °C    Relative Humidity: 28.0%		
<b>Notes</b>	Transmit Frequency: 927.59 MHz		

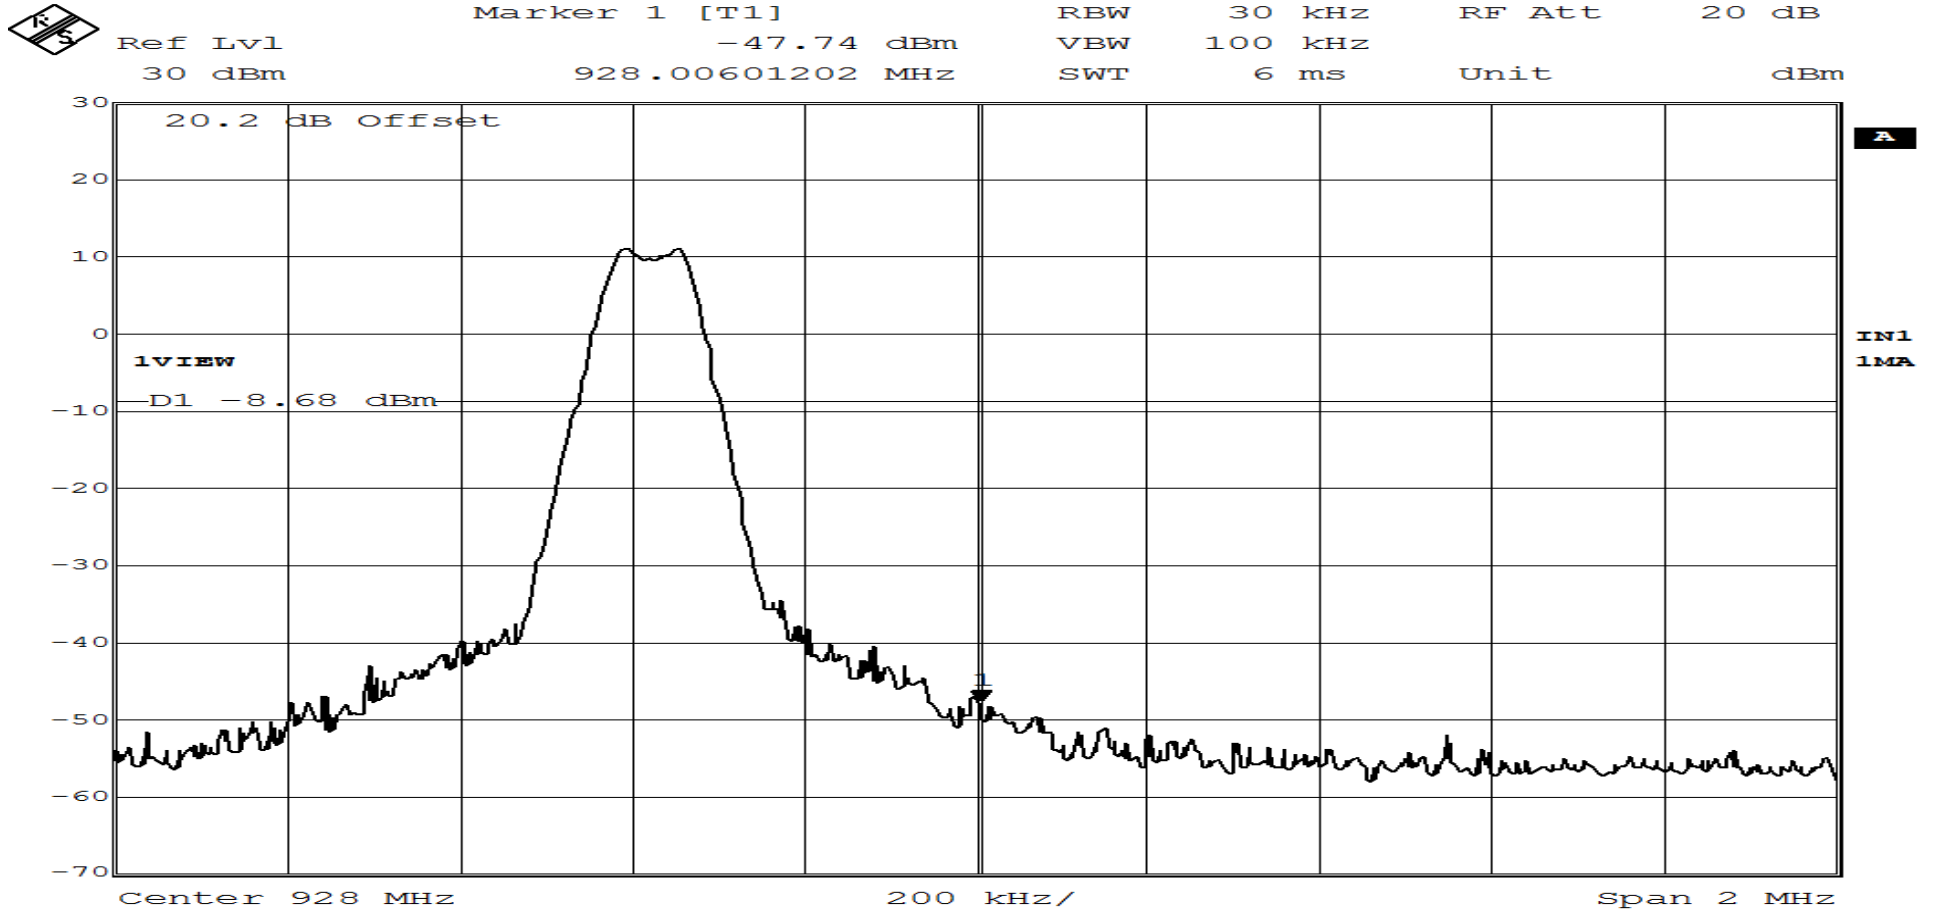

**Test Photographs**  
**Field Strength of Spurious Emissions**

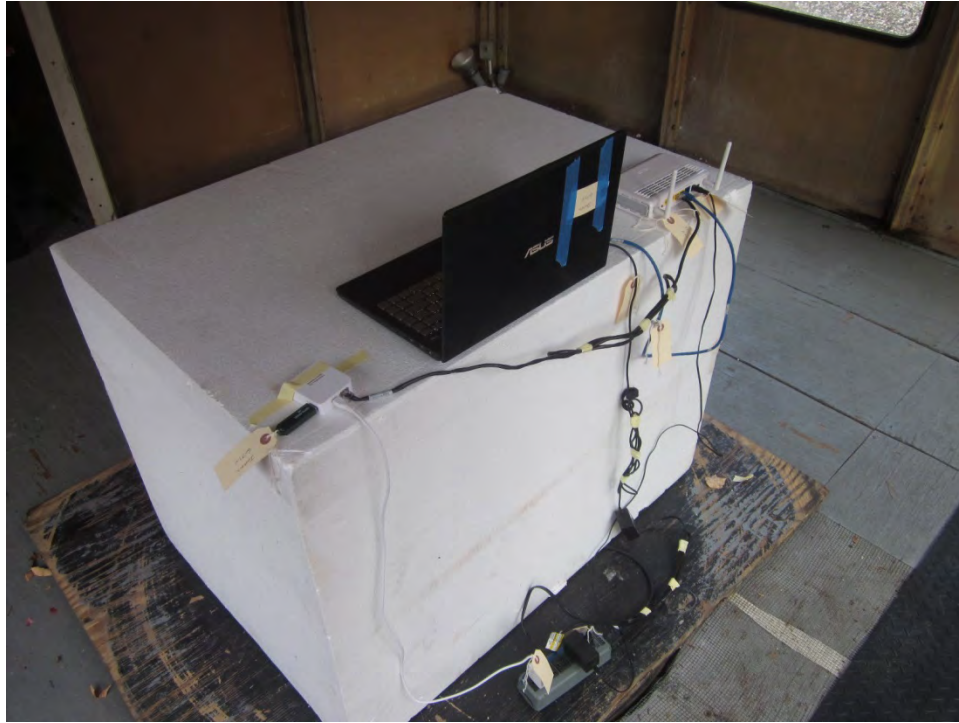

Test Configuration, 80 cm



**Retlif Testing Laboratories**

Report No. R-6151N-1

## Test Photographs Field Strength of Spurious Emissions



Horizontal Antenna Polarization, 30 MHz – 200 MHz, 80 cm



Vertical Antenna Polarization, 30 MHz – 200 MHz, 80 cm



**Retlif Testing Laboratories**

Report No. R-6151N-1



**Test Photographs**  
**Field Strength of Spurious Emissions**



Horizontal Antenna Polarization, 200 MHz – 1 GHz, 80 cm



Vertical Antenna Polarization, 200 MHz – 1 GHz, 80 cm



**Retlif Testing Laboratories**

Report No. R-6151N-1

**Test Photographs**  
**Field Strength of Spurious Emissions**



Horizontal Antenna Polarization, 1 GHz – 10 GHz, 150 cm



Vertical Antenna Polarization, 1 GHz – 10 GHz, 150 cm



**Retlif Testing Laboratories**

Report No. R-6151N-1

**FCC Section 15.247 (a) / 15.209(a)  
Field Strength of Spurious Emissions  
Test Data**



**Retlif Testing Laboratories**

Report No. R-6151N-1

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

<b>Test Method</b>	Unwanted Emissions into Restricted Frequency Bands	
<b>Customer</b>	Immedia Semiconductor	
<b>Job Number</b>	R-6151N-1	
<b>Test Sample</b>	Blink Sync Module	
<b>Model Number</b>	BSM00201U	
<b>Serial Number</b>	IMS0606441600030	
<b>Test Specification</b>	FCC Part 15 Subpart C	Paragraph: 15.247(d)
<b>Operating Mode</b>	Transmitting hopping frequency data at 902.37 MHz, 914.76 MHz and 927.59 MHz consecutively.	
<b>Technician</b>	M. Seamans	
<b>Date</b>	November 17 <sup>th</sup> , 2016	

**Notes:** Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz

### TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading		Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m		uV/m	uV/m
37.50	-	-	-	-		-	100.00
	38.00	22.10	14.20	36.30	*	65.31	I
38.25	-	-	-	-		-	100.00
73.00	-	-	-	-		-	100.00
	74.00	22.84	8.36	31.20	*	36.31	I
74.60	-	-	-	-		-	100.00
74.80	-	-	-	-		-	100.00
	75.00	19.54	8.36	27.90	*	24.83	
75.20	-	-	-	-		-	100.00
108.00	-	-	-	-		-	150.00
	115.00	12.78	10.02	22.80	*	13.80	
	-	-	-	-		-	
121.94	-	-	-	-		-	150.00
123.00	-	-	-	-		-	150.00
	130.00	7.74	15.96	23.70	*	15.31	
	-	-	-	-		-	
138.00	-	-	-	-		-	150.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.  
 \* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 1 of 7



**Retlif Testing Laboratories**

Report No. R-6151N-1

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

<b>Test Method</b>	Unwanted Emissions into Restricted Frequency Bands	
<b>Customer</b>	Immedia Semiconductor	
<b>Job Number</b>	R-6151N-1	
<b>Test Sample</b>	Blink Sync Module	
<b>Model Number</b>	BSM00201U	
<b>Serial Number</b>	IMS0606441600030	
<b>Test Specification</b>	FCC Part 15 Subpart C	Paragraph: 15.247(d)
<b>Operating Mode</b>	Transmitting hopping frequency data at 902.37 MHz, 914.76 MHz and 927.59 MHz consecutively.	
<b>Technician</b>	M. Seamans	
<b>Date</b>	November 17 <sup>th</sup> , 2016	

**Notes:** Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz

### TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading		Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m		uV/m	uV/m
149.90	-	-	-	-		-	150.00
	150.00	15.43	11.17	26.60	*	22.13	
150.05	-	-	-	-		-	150.00
156.52	-	-	-	-		-	150.00
	156.52	13.82	12.08	25.90	*	19.72	
156.52	-	-	-	-		-	150.00
156.70	-	-	-	-		-	150.00
	156.80	12.08	12.12	24.20	*	16.22	
156.90	-	-	-	-		-	150.00
162.01	-	-	-	-		-	150.00
	165.00	9.92	12.68	22.60	*	13.49	
167.17	-	-	-	-		-	150.00
167.72	-	-	-	-		-	150.00
	170.00	9.60	12.80	22.40	*	13.18	
173.20	-	-	-	-		-	150.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.  
 \* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 2 of 7



**Retlif Testing Laboratories**

Report No. R-6151N-1

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

<b>Test Method</b>	Unwanted Emissions into Restricted Frequency Bands	
<b>Customer</b>	Immedia Semiconductor	
<b>Job Number</b>	R-6151N-1	
<b>Test Sample</b>	Blink Sync Module	
<b>Model Number</b>	BSM00201U	
<b>Serial Number</b>	IMS0606441600030	
<b>Test Specification</b>	FCC Part 15 Subpart C	Paragraph: 15.247(d)
<b>Operating Mode</b>	Transmitting hopping frequency data at 902.37 MHz, 914.76 MHz and 927.59 MHz consecutively.	
<b>Technician</b>	M. Seamans	
<b>Date</b>	November 17 <sup>th</sup> , 2016	

**Notes:** Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz

### EST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading		Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m		uV/m	uV/m
240.00	-	-	-	-		-	200.00
	266.46	12.85	16.85	29.70		30.55	
285.00	-	-	-	-		-	200.00
322.80	-	-	-	-		-	200.00
	330.00	7.89	18.91	26.80	*	21.88	
335.40	-	-	-	-		-	200.00
399.90	-	-	-	-		-	200.00
	405.00	2.11	21.49	23.60	*	15.14	
410.00	-	-	-	-		-	200.00
608.00	-	-	-	-		-	200.00
	611.00	-1.84	27.34	25.50	*	18.84	
614.00	-	-	-	-		-	200.00
960.00	-	-	-	-		-	500.00
	975.00	0.80	32.10	32.90	*	44.16	
1240.00	-	-	-	-		-	500.00
1300.00	-	-	-	-		-	500.00
	1350.00	33.67	-5.55	28.12	*	25.47	
1427.00	-	-	-	-		-	500.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.  
 \* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 3 of 7



**Retlif Testing Laboratories**

Report No. R-6151N-1

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

<b>Test Method</b>	Unwanted Emissions into Restricted Frequency Bands	
<b>Customer</b>	Immedia Semiconductor	
<b>Job Number</b>	R-6151N-1	
<b>Test Sample</b>	Blink Sync Module	
<b>Model Number</b>	BSM00201U	
<b>Serial Number</b>	IMS0606441600030	
<b>Test Specification</b>	FCC Part 15 Subpart C	Paragraph: 15.247(d)
<b>Operating Mode</b>	Transmitting hopping frequency data at 902.37 MHz, 914.76 MHz and 927.59 MHz consecutively.	
<b>Technician</b>	M. Seamans	
<b>Date</b>	November 17 <sup>th</sup> , 2016	
<b>Notes:</b> Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz		

### TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading		Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m		uV/m	uV/m
1435.00	-	-	-	-		-	500.00
	1500.00	32.21	-4.81	27.40	*	23.44	
1646.50	-	-	-	-		-	500.00
1660.00	-	-	-	-		-	500.00
	1680.00	31.41	-4.01	27.40	*	23.44	
1710.00	-	-	-	-		-	500.00
1718.80	-	-	-	-		-	500.00
	1720.00	32.08	-3.84	28.24	*	25.82	
1722.20	-	-	-	-		-	500.00
2200.00	-	-	-	-		-	500.00
	2250.00	32.14	-2.07	30.07	*	31.88	
2300.00	-	-	-	-		-	500.00
2310.00	-	-	-	-		-	500.00
	2360.00	31.69	-1.79	29.90	*	31.26	
2390.00	-	-	-	-		-	500.00
2483.50	-	-	-	-		-	500.00
	2490.00	31.91	-1.47	30.44	*	33.27	
2500.00	-	-	-	-		-	500.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.  
 \* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 4 of 7



**Retlif Testing Laboratories**

Report No. R-6151N-1

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

<b>Test Method</b>	Unwanted Emissions into Restricted Frequency Bands	
<b>Customer</b>	Immedia Semiconductor	
<b>Job Number</b>	R-6151N-1	
<b>Test Sample</b>	Blink Sync Module	
<b>Model Number</b>	BSM00201U	
<b>Serial Number</b>	IMS0606441600030	
<b>Test Specification</b>	FCC Part 15 Subpart C	Paragraph: 15.247(d)
<b>Operating Mode</b>	Transmitting hopping frequency data at 902.37 MHz, 914.76 MHz and 927.59 MHz consecutively.	
<b>Technician</b>	M. Seamans	
<b>Date</b>	November 17 <sup>th</sup> , 2016	

**Notes:** Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz

### TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
2690.00	-	-	-	-			-	500.00
	2706.00	37.91	-0.97	36.94	*		70.31	
	2745.00	38.09	-0.89	37.20	*		72.44	
	2781.00	38.19	-0.81	37.38	*		73.96	
2900.00	-	-	-	-			-	500.00
3260.00	-	-	-	-			-	500.00
	3263.00	30.75	0.11	30.86	*		34.91	
3267.00	-	-	-	-			-	500.00
3332.00	-	-	-	-			-	500.00
	3336.00	30.80	0.23	31.03	*		35.60	
3339.00	-	-	-	-			-	500.00
3345.00	-	-	-	-			-	500.00
	3350.00	31.45	0.26	31.71	*		38.50	
3358.00	-	-	-	-			-	500.00
3600.00	-	-	-	-			-	500.00
	3608.00	38.15	0.67	38.82	*		87.30	
	3660.00	38.45	0.75	39.20	*		91.20	
	3708.00	38.32	0.83	39.15	*		90.68	

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.  
 \* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 5 of 7



**Retlif Testing Laboratories**

Report No. R-6151N-1



# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

<b>Test Method</b>	Unwanted Emissions into Restricted Frequency Bands	
<b>Customer</b>	Immedia Semiconductor	
<b>Job Number</b>	R-6151N-1	
<b>Test Sample</b>	Blink Sync Module	
<b>Model Number</b>	BSM00201U	
<b>Serial Number</b>	IMS0606441600030	
<b>Test Specification</b>	FCC Part 15 Subpart C	Paragraph: 15.247(d)
<b>Operating Mode</b>	Transmitting hopping frequency data at 902.37 MHz, 914.76 MHz and 927.59 MHz consecutively.	
<b>Technician</b>	M. Seamans	
<b>Date</b>	November 17 <sup>th</sup> , 2016	

**Notes:** Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz

### TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
	-	-	-	-			-	
4400.00	-	-	-	-			-	500.00
4500.00	-	-	-	-			-	500.00
	4510.00	40.11	1.71	41.82	*		123.31	
	4575.00	40.05	1.76	42.41	*		131.98	
	4635.00	40.35	1.81	42.16	*		128.23	
	-	-	-	-			-	
5150.00	-	-	-	-			-	500.00
5350.00	-	-	-	-			-	500.00
	5400.00	29.72	2.43	32.15	*		40.50	
5460.00	-	-	-	-			-	500.00
7250.00	-	-	-	-			-	500.00
	7500.00	30.58	3.85	34.43	*		52.66	
7750.00	-	-	-	-			-	500.00
8025.00	-	-	-	-			-	500.00
	8118.00	34.08	4.19	38.27	*		81.94	
	8235.00	34.50	4.25	38.75	*		86.60	
	8343.00	34.79	4.26	39.05	*		89.64	
	-	-	-	-			-	
8500.00	-	-	-	-			-	500.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.  
 \* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).

Data Sheet 6 of 7




**Retlif Testing Laboratories**

Report No. R-6151N-1



**Test Photographs**  
**AC Line Conducted Emissions**

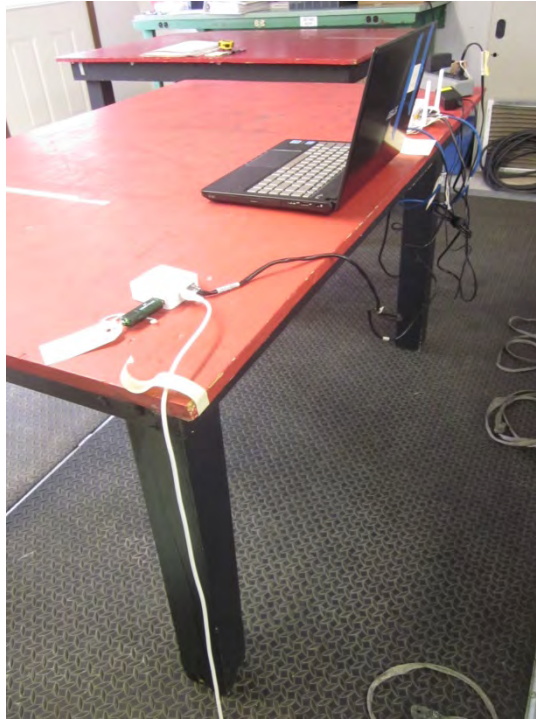

Test Configuration



Test Setup



**Retlif Testing Laboratories**

Report No. R-6151N-1

**FCC Section 15.207 (a)  
AC Line Conducted Emissions  
Test Data**




**Retlif Testing Laboratories**

Report No. R-6151N-1


# RETLIF TESTING LABORATORIES

<b>Test Method</b>	Conducted Emissions 150 kHz to 30 MHz		
<b>Customer</b>	Immedia Semiconductor	<b>Job No.</b>	R-6151N-1
<b>Test Sample</b>	Blink Sync Module		
<b>Model No.</b>	BSM00201U	<b>Serial No.</b>	IMS0606441600030
<b>Operating Mode</b>	Exercising USB, WiFi, and 902-928MHz Radio		
<b>Test Specification</b>	FCC Part 15. 207(a)		
<b>Technician</b>	M. Seamans	<b>Date</b>	November 16 <sup>th</sup> , 2016
<b>Climatic Conditions</b>	Temp: 21.0 °C    Relative Humidity: 46.0 %		
<b>Lead Tested</b>	120 VAC 60 Hz Hot    Peak Readings to Quasi-Peak Limits.		

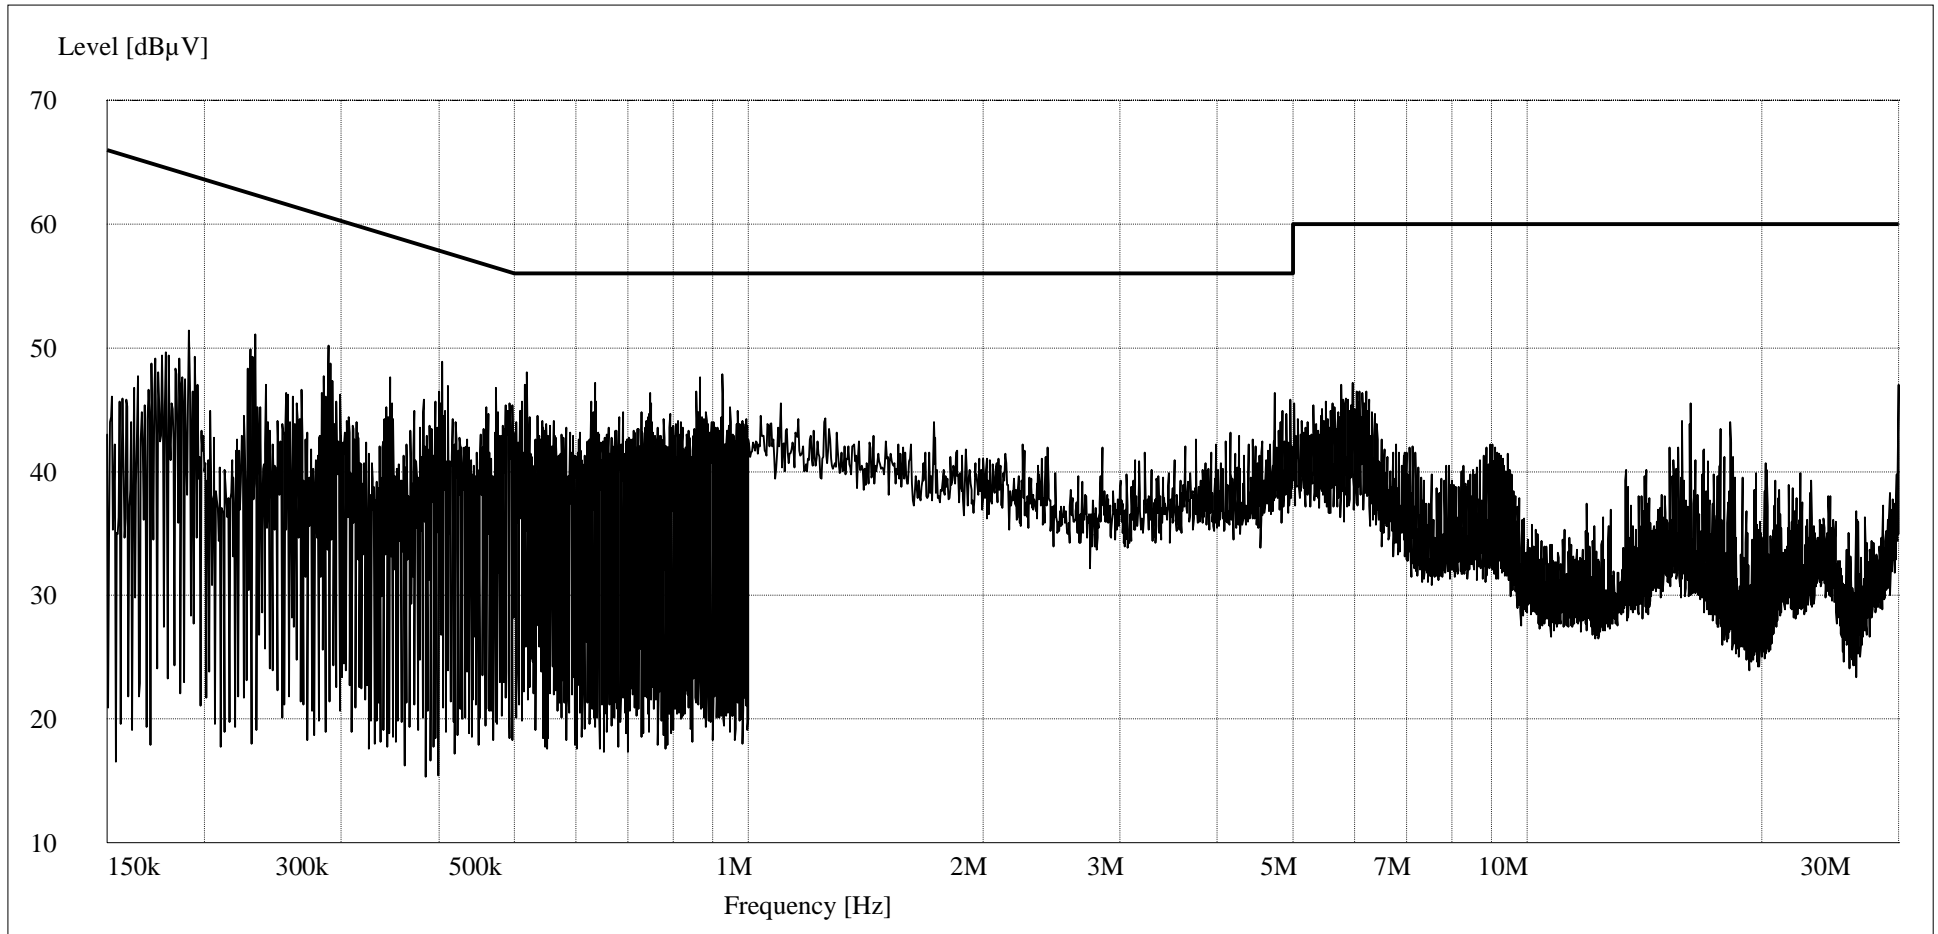


# RETLIF TESTING LABORATORIES

<b>Test Method</b>	Conducted Emissions 150 kHz to 30 MHz		
<b>Customer</b>	Immedia Semiconductor	<b>Job No.</b>	R-6151N-1
<b>Test Sample</b>	Blink Sync Module		
<b>Model No.</b>	BSM00201U	<b>Serial No.</b>	IMS0606441600030
<b>Operating Mode</b>	Exercising USB, WiFi, and 902-928MHz Radio		
<b>Test Specification</b>	FCC Part 15. 207(a)		
<b>Technician</b>	M. Seamans	<b>Date</b>	November 16 <sup>th</sup> , 2016
<b>Climatic Conditions</b>	Temp: 21.0 °C    Relative Humidity: 46.0 %		
<b>Lead Tested</b>	120 VAC 60 Hz Neutral    Peak Readings to Quasi-Peak Limits.		

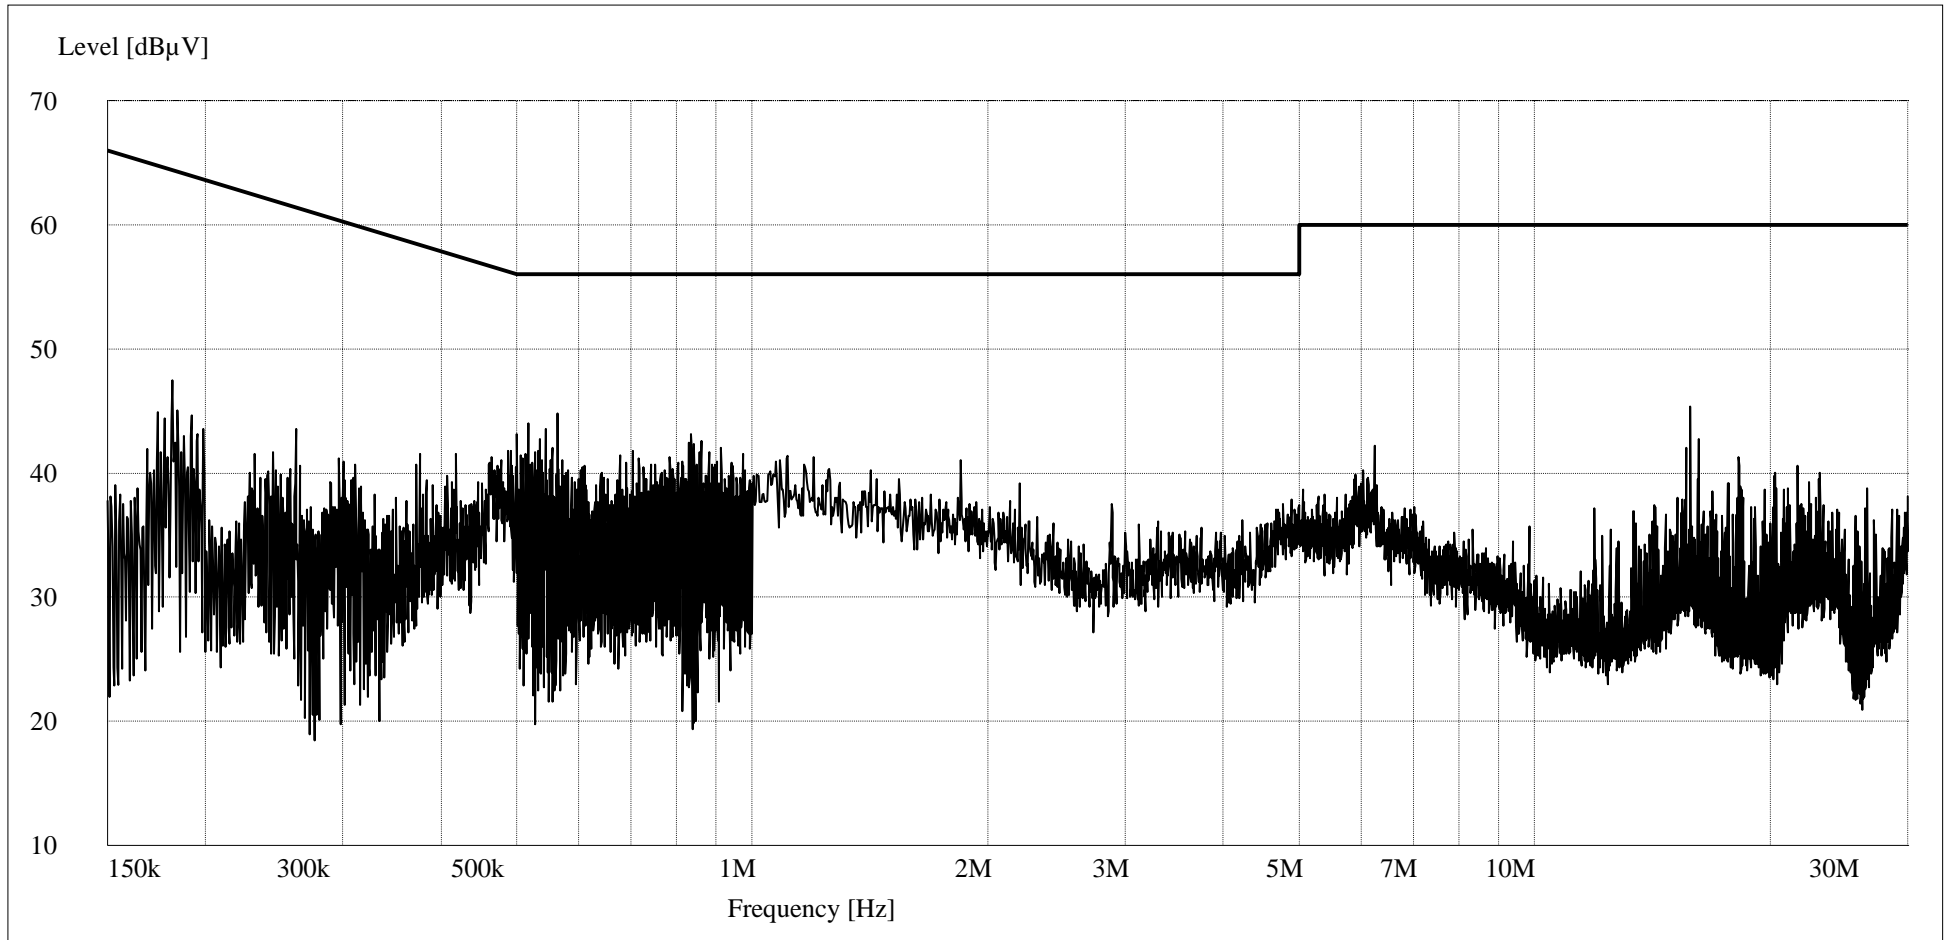

# RETLIF TESTING LABORATORIES

<b>Test Method</b>	Conducted Emissions 150 kHz to 30 MHz		
<b>Customer</b>	Immedia Semiconductor	<b>Job No.</b>	R-6151N-1
<b>Test Sample</b>	Blink Sync Module		
<b>Model No.</b>	BSM00201U	<b>Serial No.</b>	IMS0606441600030
<b>Operating Mode</b>	Exercising USB, WiFi, and 902-928MHz Radio		
<b>Test Specification</b>	FCC Part 15. 207(a)		
<b>Technician</b>	M. Seamans	<b>Date</b>	November 16 <sup>th</sup> , 2016
<b>Climatic Conditions</b>	Temp: 21.0 °C    Relative Humidity: 46.0 %		
<b>Lead Tested</b>	120 VAC 60 Hz Hot    Average Readings to Average Limits.		

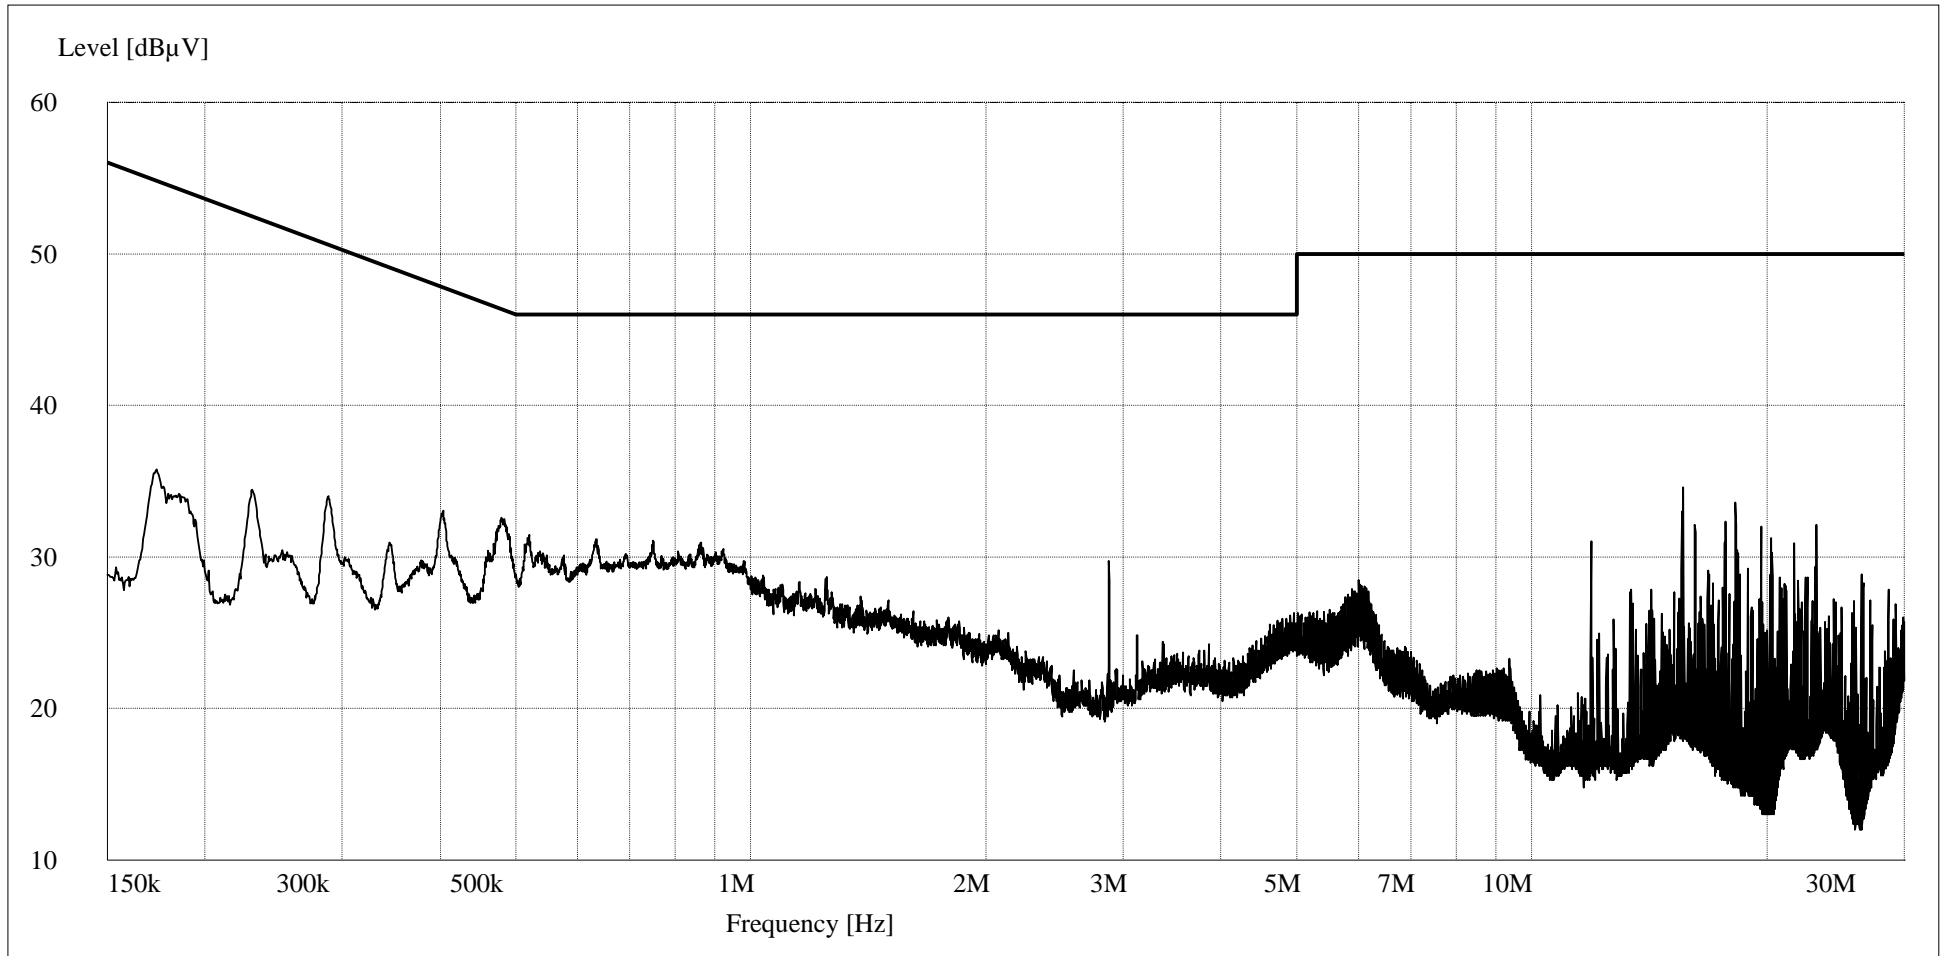

# RETLIF TESTING LABORATORIES

<b>Test Method</b>	Conducted Emissions 150 kHz to 30 MHz		
<b>Customer</b>	Immedia Semiconductor	<b>Job No.</b>	R-6151N-1
<b>Test Sample</b>	Blink Sync Module		
<b>Model No.</b>	BSM00201U	<b>Serial No.</b>	IMS0606441600030
<b>Operating Mode</b>	Exercising USB, WiFi, and 902-928MHz Radio		
<b>Test Specification</b>	FCC Part 15. 207(a)		
<b>Technician</b>	M. Seamans	<b>Date</b>	November 16 <sup>th</sup> , 2016
<b>Climatic Conditions</b>	Temp: 21.0 °C    Relative Humidity: 46.0 %		
<b>Lead Tested</b>	120 VAC 60 Hz Neutral    Average Readings to Average Limits.		

