


EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

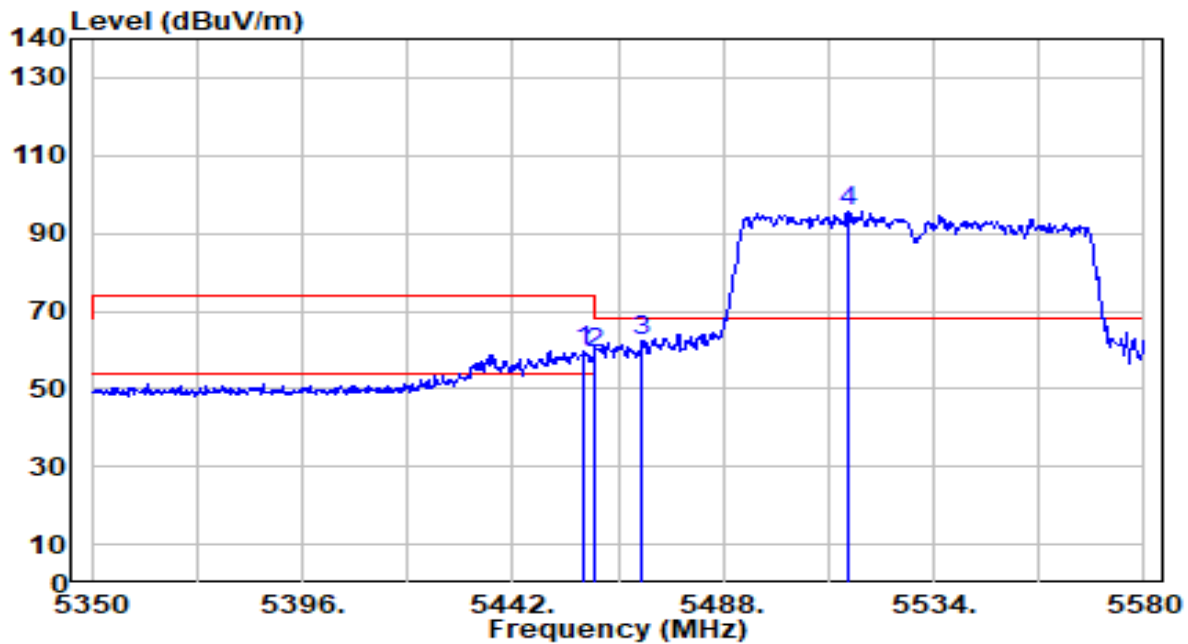


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.410	60.64	-0.88	59.76	-14.24	74.00	300	27	Peak
2	5460.000	59.94	-0.87	59.07	-14.93	74.00	300	27	Peak
3	* 5470.000	62.98	-0.84	62.14	-6.06	68.20	300	27	Peak
4	5515.370	96.39	-0.70	95.69	N/A	N/A	300	27	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

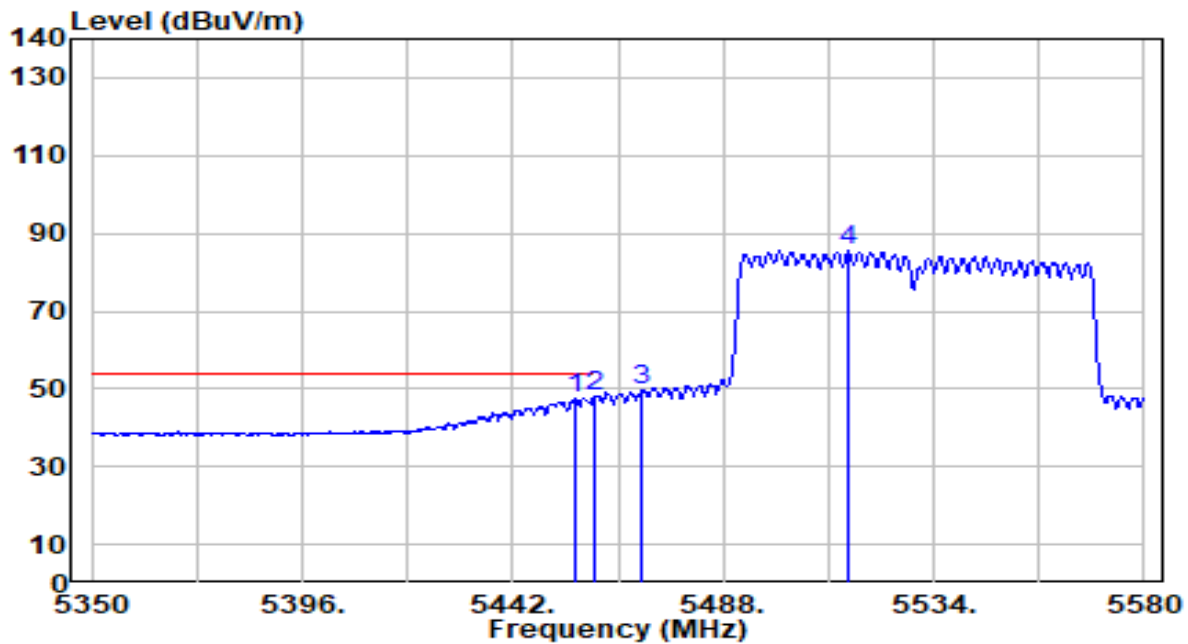


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.570	48.48	-0.88	47.60	-6.40	54.00	300	27	Average
2	* 5460.000	48.95	-0.87	48.08	-5.92	54.00	300	27	Average
3	5470.000	50.43	-0.84	49.59	N/A	N/A	300	27	Average
4	5515.600	86.08	-0.70	85.38	N/A	N/A	300	27	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

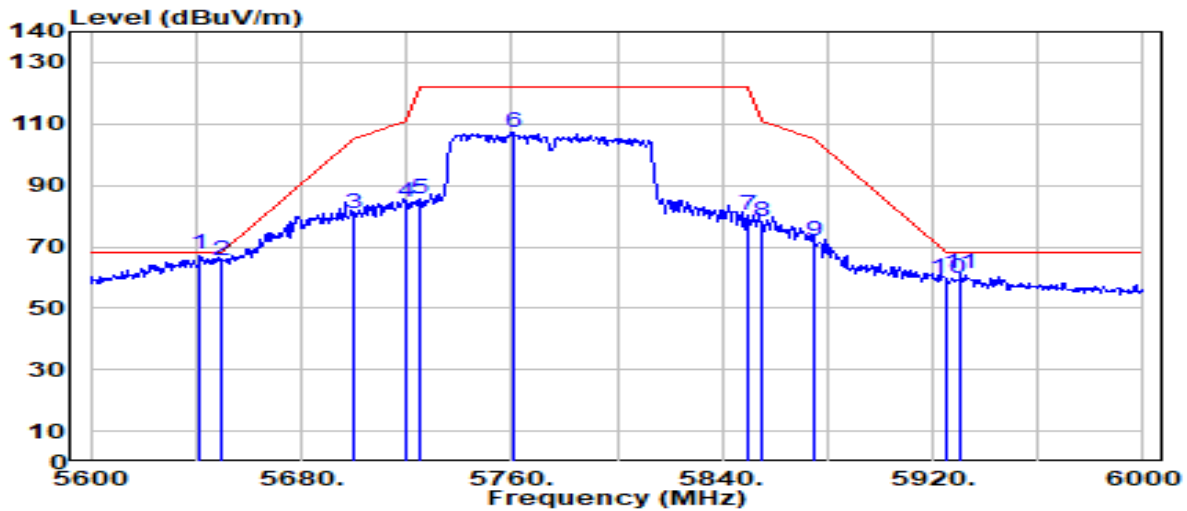


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5641.600	67.89	-0.21	67.68	-0.52	68.20	118	327	Peak
2	5650.000	65.87	-0.16	65.71	-2.49	68.20	118	327	Peak
3	5700.000	80.87	0.10	80.97	-24.23	105.20	118	327	Peak
4	5720.000	84.12	0.20	84.33	-26.47	110.80	118	327	Peak
5	5725.000	85.30	0.23	85.53	-36.67	122.20	118	327	Peak
6	5761.200	106.83	0.42	107.25	N/A	N/A	118	327	Peak
7	5850.000	79.48	0.58	80.06	-42.14	122.20	118	327	Peak
8	5855.000	77.49	0.58	78.08	-32.72	110.80	118	327	Peak
9	5875.000	71.50	0.57	72.07	-33.13	105.20	118	327	Peak
10	5925.000	59.22	0.53	59.75	-8.45	68.20	118	327	Peak
11	5930.400	60.77	0.52	61.29	-6.91	68.20	118	327	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

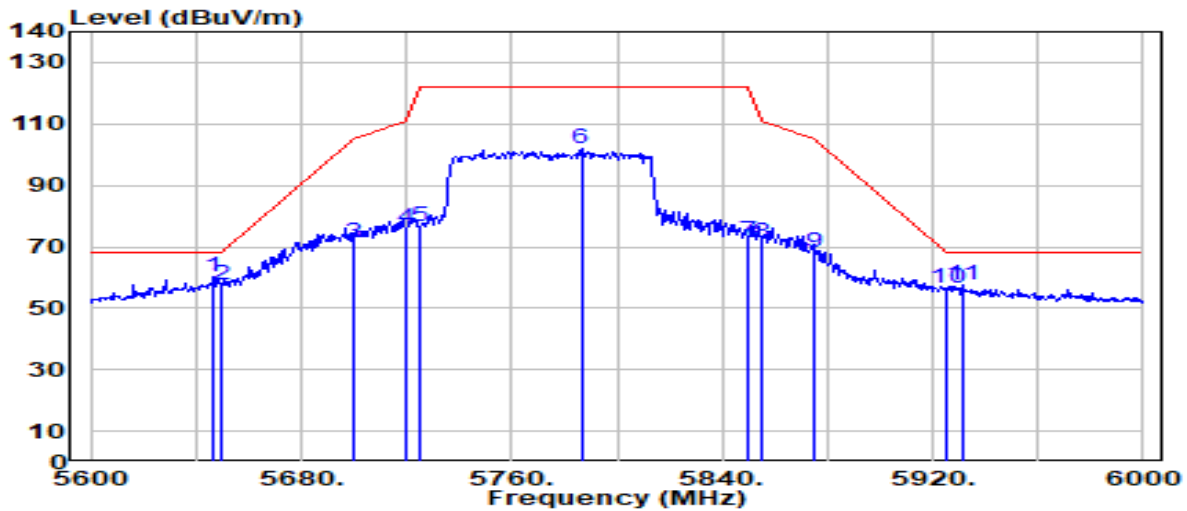


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5646.400	60.39	-0.18	60.21	-7.99	68.20	109	7	Peak
2	5650.000	57.60	-0.16	57.43	-10.77	68.20	109	7	Peak
3	5700.000	71.16	0.10	71.25	-33.95	105.20	109	7	Peak
4	5720.000	75.66	0.20	75.87	-34.93	110.80	109	7	Peak
5	5725.000	76.45	0.23	76.68	-45.52	122.20	109	7	Peak
6	5786.400	101.17	0.55	101.72	N/A	N/A	109	7	Peak
7	5850.000	71.42	0.58	72.01	-50.19	122.20	109	7	Peak
8	5855.000	70.55	0.58	71.13	-39.67	110.80	109	7	Peak
9	5875.000	67.77	0.57	68.33	-36.87	105.20	109	7	Peak
10	5925.000	55.88	0.53	56.41	-11.79	68.20	109	7	Peak
11	5931.600	57.07	0.52	57.59	-10.61	68.20	109	7	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

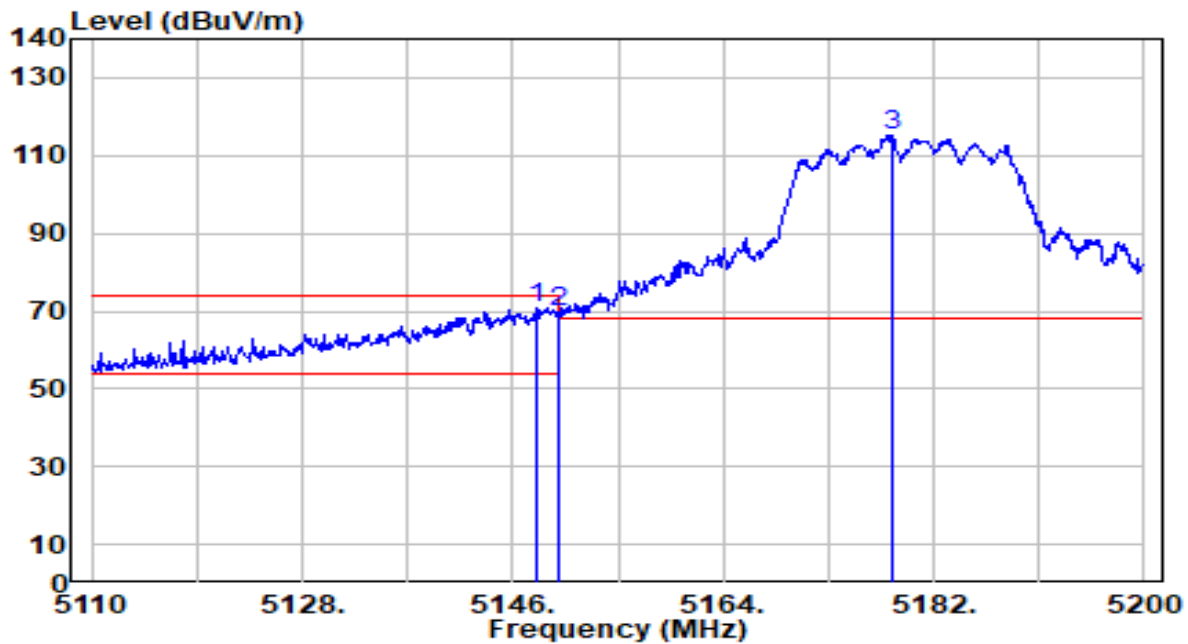


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5147.980	71.54	-0.72	70.83	-3.17	74.00	253	358	Peak
2	5150.000	70.39	-0.72	69.67	-4.33	74.00	253	358	Peak
3	5178.400	115.97	-0.73	115.24	N/A	N/A	253	358	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

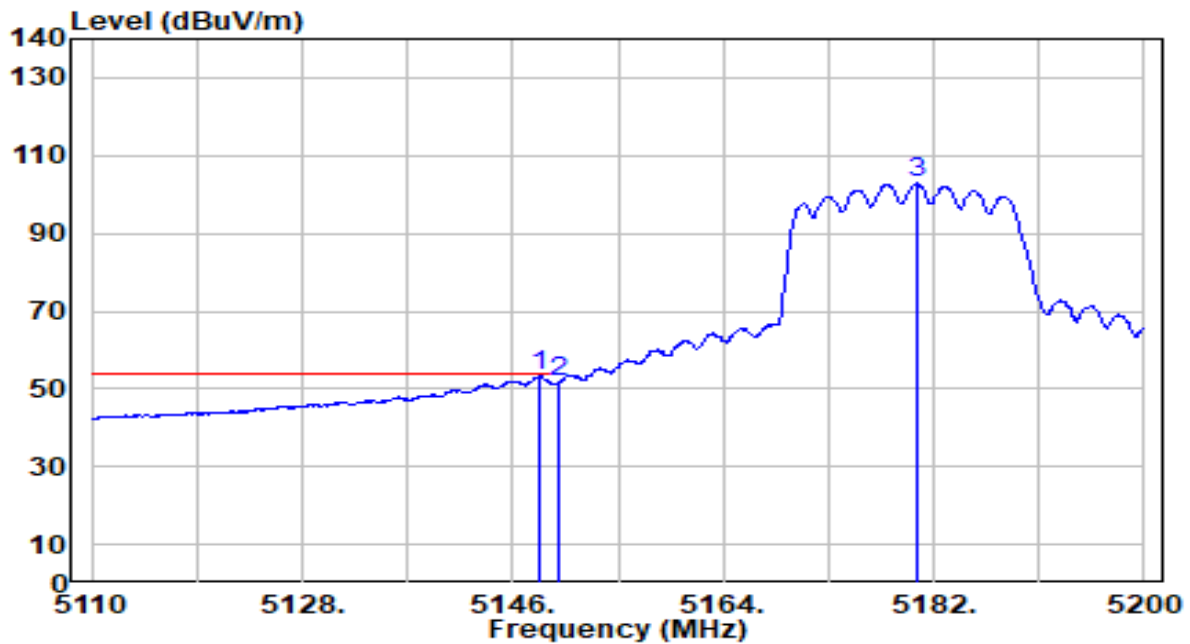


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	54.13	-0.72	53.41	-0.59	54.00	253	358	Average
2		52.27	-0.72	51.55	-2.45	54.00	253	358	Average
3		103.52	-0.73	102.79	N/A	N/A	253	358	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

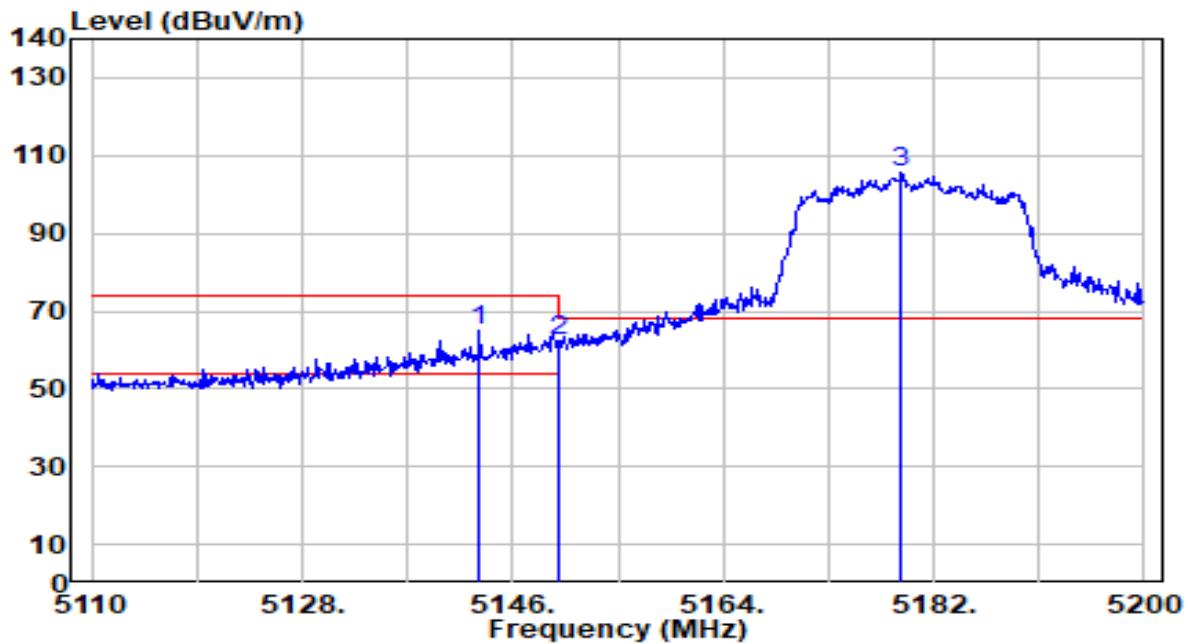


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5143.210	65.61	-0.71	64.90	-9.10	74.00	298	7	Peak
2	5150.000	62.95	-0.72	62.23	-11.77	74.00	298	7	Peak
3	5179.210	106.37	-0.73	105.64	N/A	N/A	298	7	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

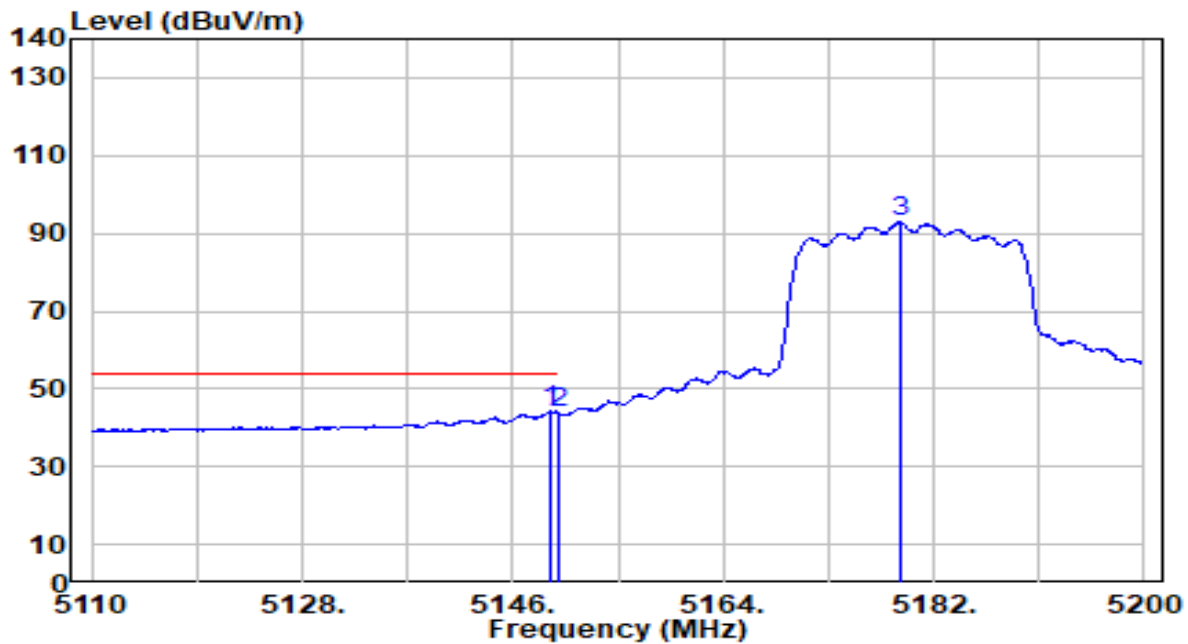


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5149.240	44.97	-0.72	44.25	-9.75	54.00	298	7	Average
2		5150.000	44.64	-0.72	43.93	-10.07	54.00	298	7	Average
3		5179.120	93.54	-0.73	92.81	N/A	N/A	298	7	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

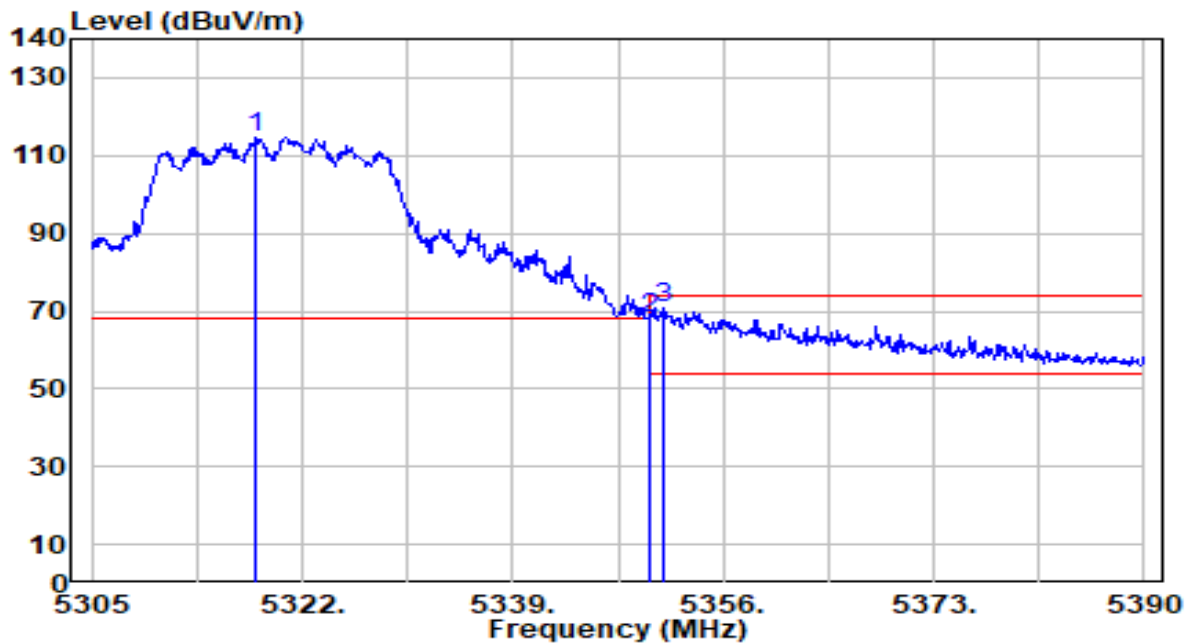


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.260	115.67	-0.92	114.75	N/A	N/A	232	0	Peak
2	5350.000	69.38	-0.97	68.40	-5.60	74.00	232	0	Peak
3	* 5351.155	72.02	-0.97	71.04	-2.96	74.00	232	0	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

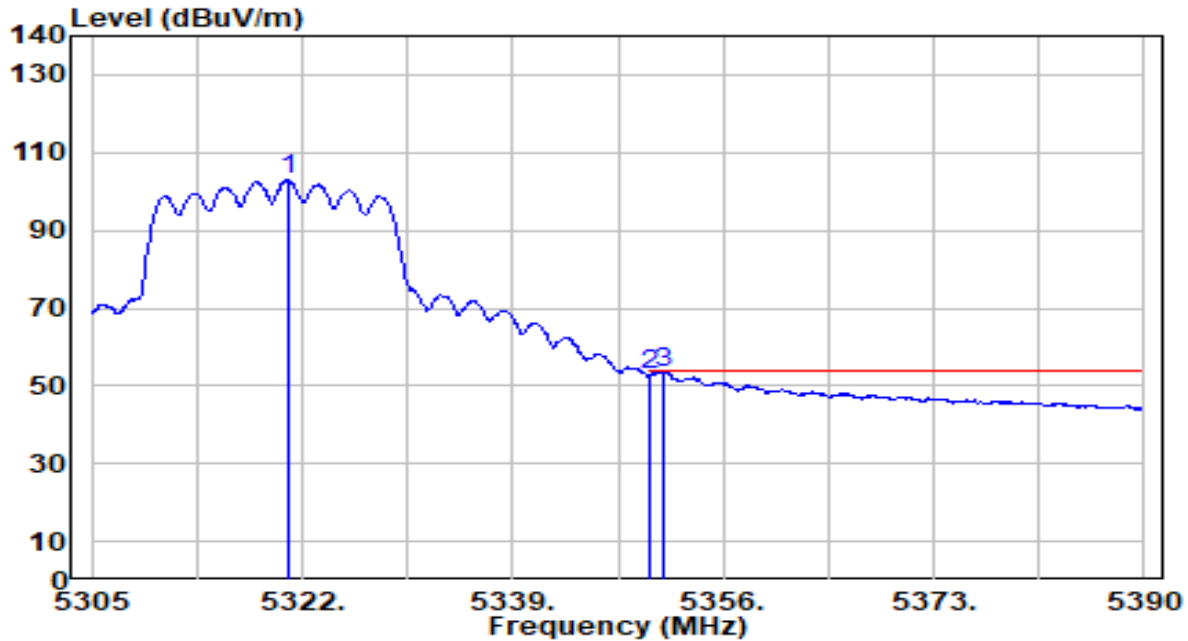


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.895	103.75	-0.93	102.82	N/A	N/A	232	0	Average
2	5350.000	53.64	-0.97	52.67	-1.33	54.00	232	0	Average
3	* 5351.155	54.39	-0.97	53.42	-0.58	54.00	232	0	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

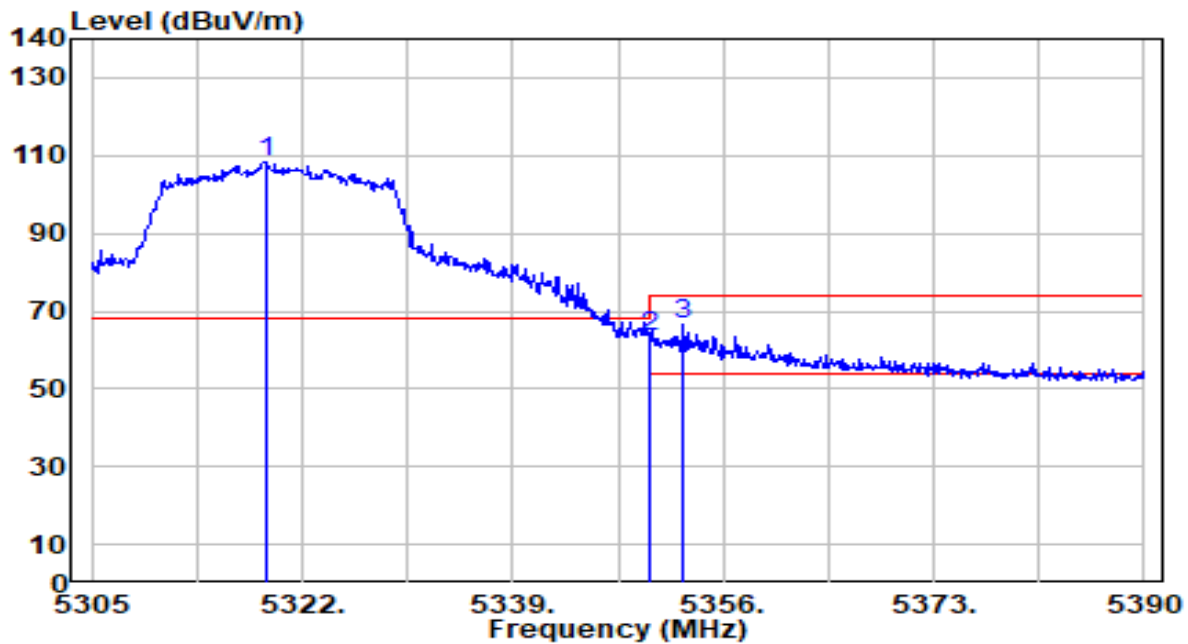


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.025	109.45	-0.92	108.53	N/A	N/A	176	333	Peak
2	5350.000	64.50	-0.97	63.53	-10.47	74.00	176	333	Peak
3	* 5352.770	67.33	-0.98	66.35	-7.65	74.00	176	333	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preampifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

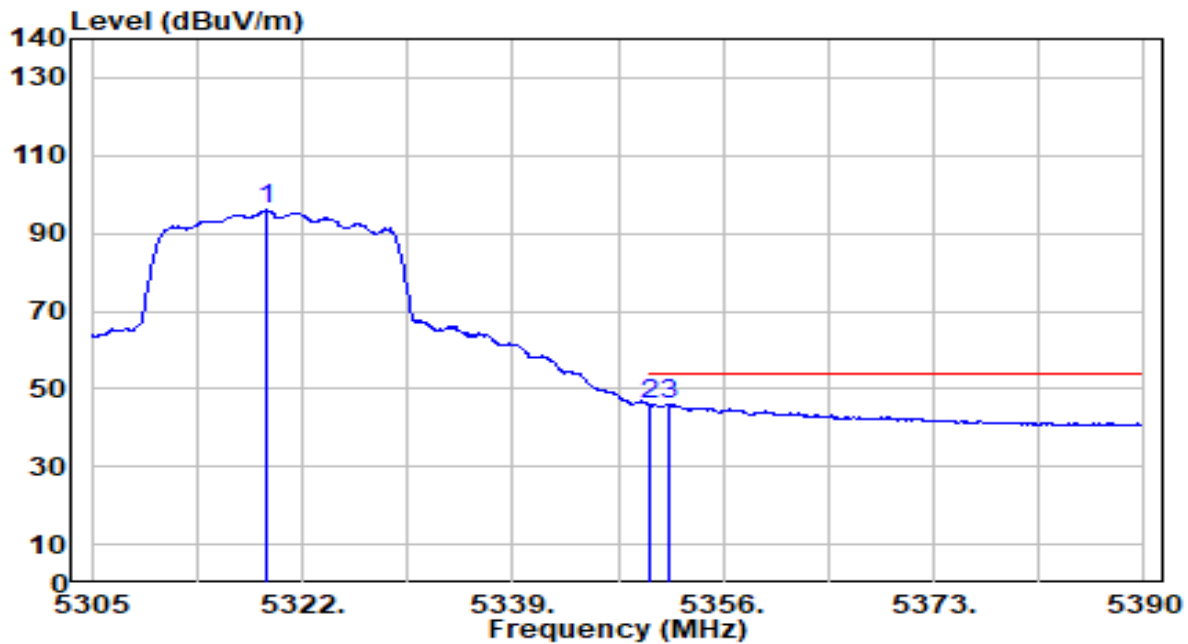


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.110	96.84	-0.93	95.91	N/A	N/A	176	333	Average
2	* 5350.000	47.07	-0.97	46.10	-7.90	54.00	176	333	Average
3	5351.580	46.85	-0.97	45.88	-8.12	54.00	176	333	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

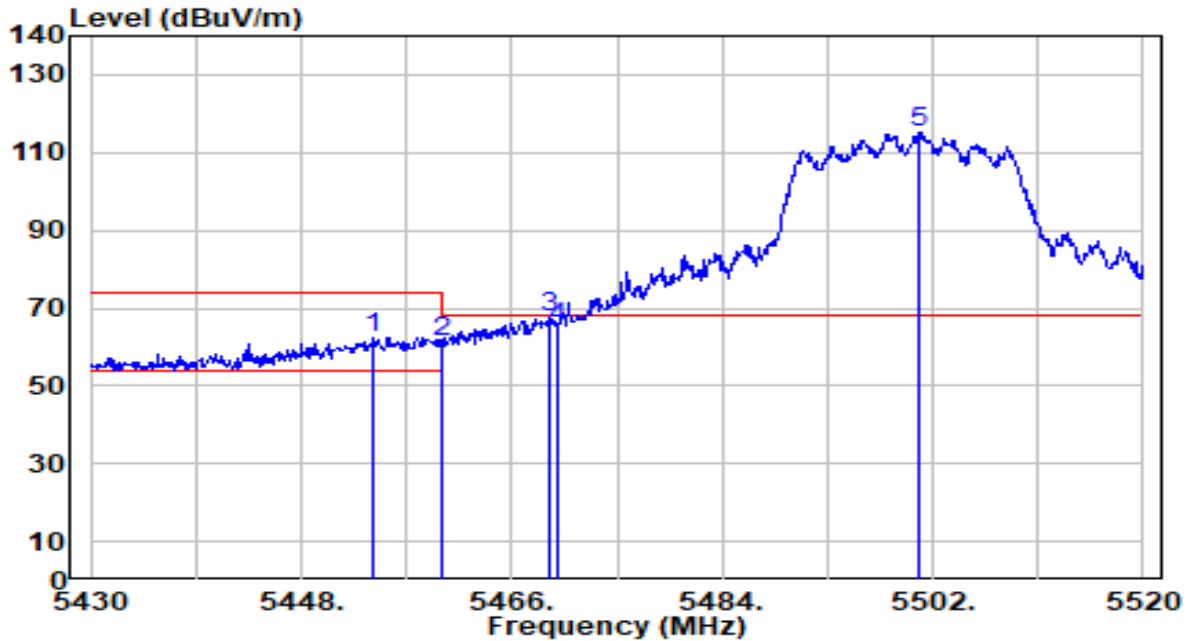


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.120	63.31	-0.89	62.42	-11.58	74.00	211	360	Peak
2	5460.000	61.93	-0.87	61.06	-12.94	74.00	211	360	Peak
3	* 5469.150	68.45	-0.84	67.61	-0.59	68.20	211	360	Peak
4	5470.000	65.92	-0.84	65.09	-3.11	68.20	211	360	Peak
5	5500.830	115.95	-0.75	115.20	N/A	N/A	211	360	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

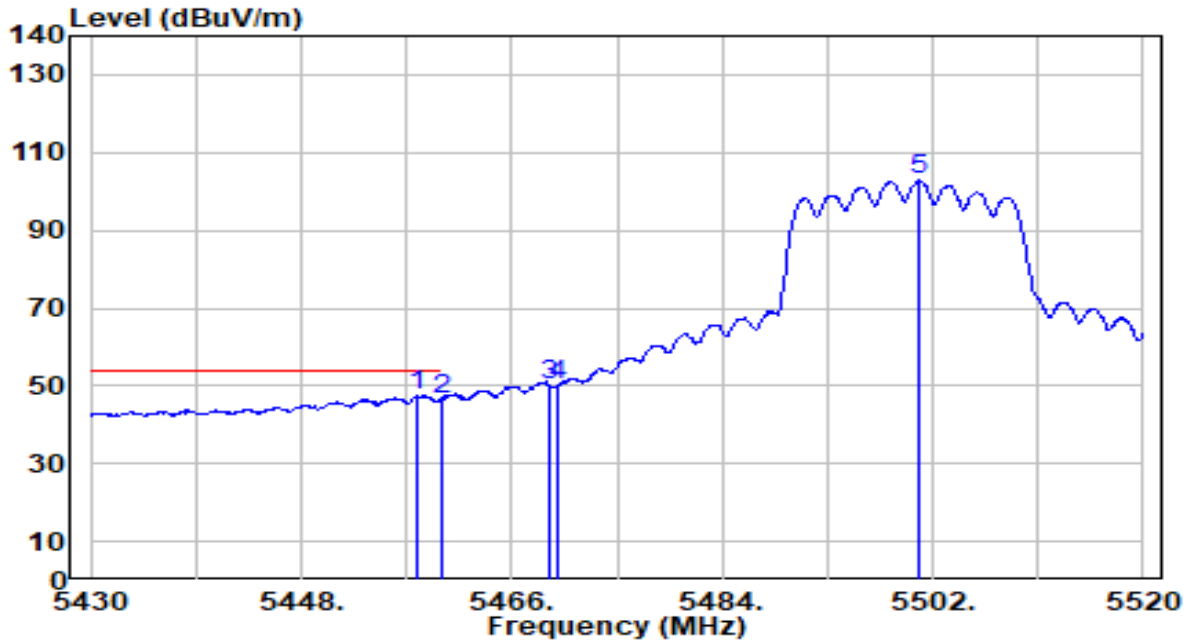


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5457.990	48.44	-0.88	47.57	-6.43	54.00	211	360	Average
2	5460.000	47.57	-0.87	46.70	-7.30	54.00	211	360	Average
3	5469.150	51.06	-0.84	50.22	N/A	N/A	211	360	Average
4	5470.000	50.90	-0.84	50.06	N/A	N/A	211	360	Average
5	5500.830	103.54	-0.75	102.79	N/A	N/A	211	360	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

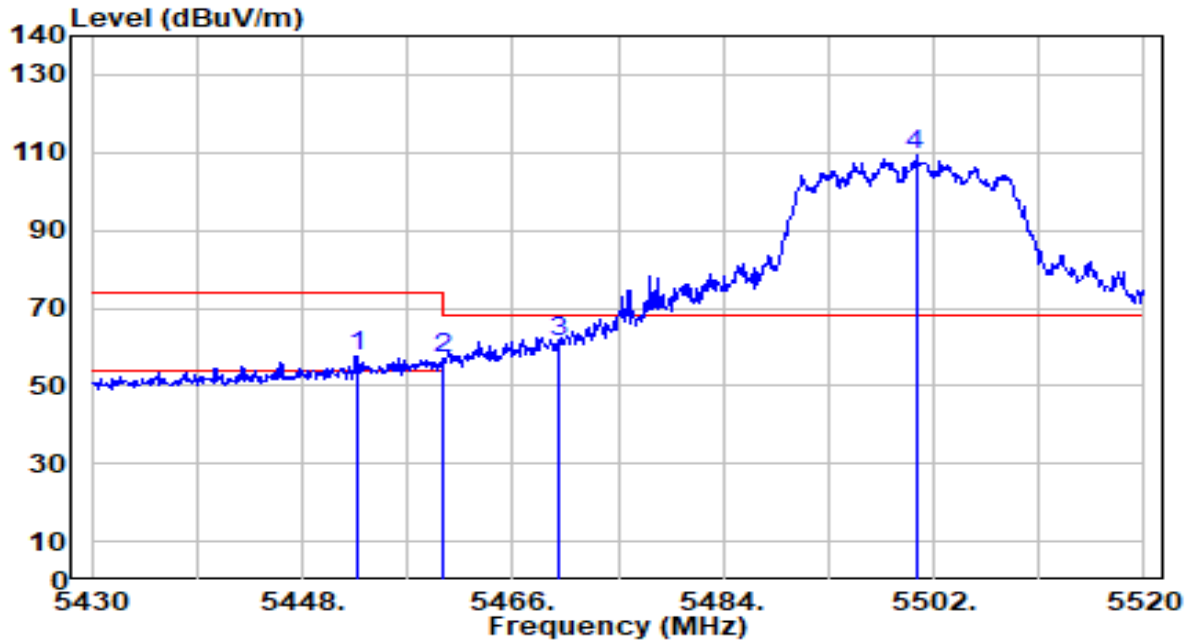


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.680	58.38	-0.89	57.49	-16.51	74.00	300	27	Peak
2	5460.000	57.87	-0.87	57.00	-17.00	74.00	300	27	Peak
3	* 5470.000	62.20	-0.84	61.36	-6.84	68.20	300	27	Peak
4	5500.470	110.28	-0.75	109.53	N/A	N/A	300	27	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

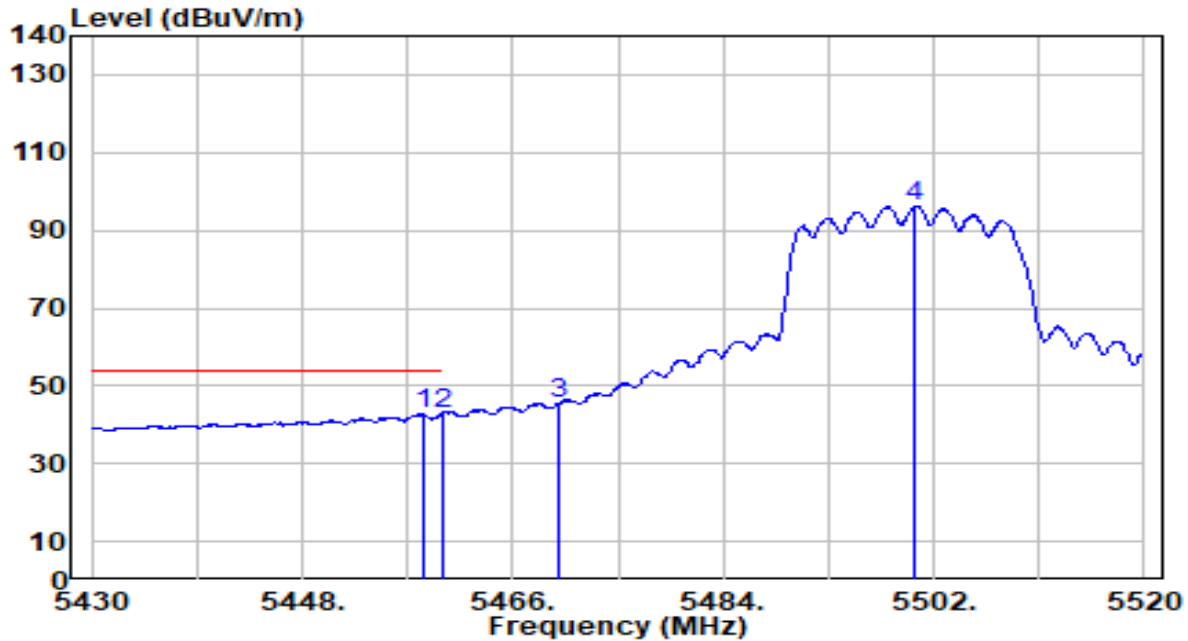


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5458.350	43.57	-0.87	42.70	-11.30	54.00	300	27	Average
2	5460.000	43.42	-0.87	42.55	-11.45	54.00	300	27	Average
3	5470.000	46.19	-0.84	45.35	N/A	N/A	300	27	Average
4	5500.380	97.02	-0.75	96.27	N/A	N/A	300	27	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

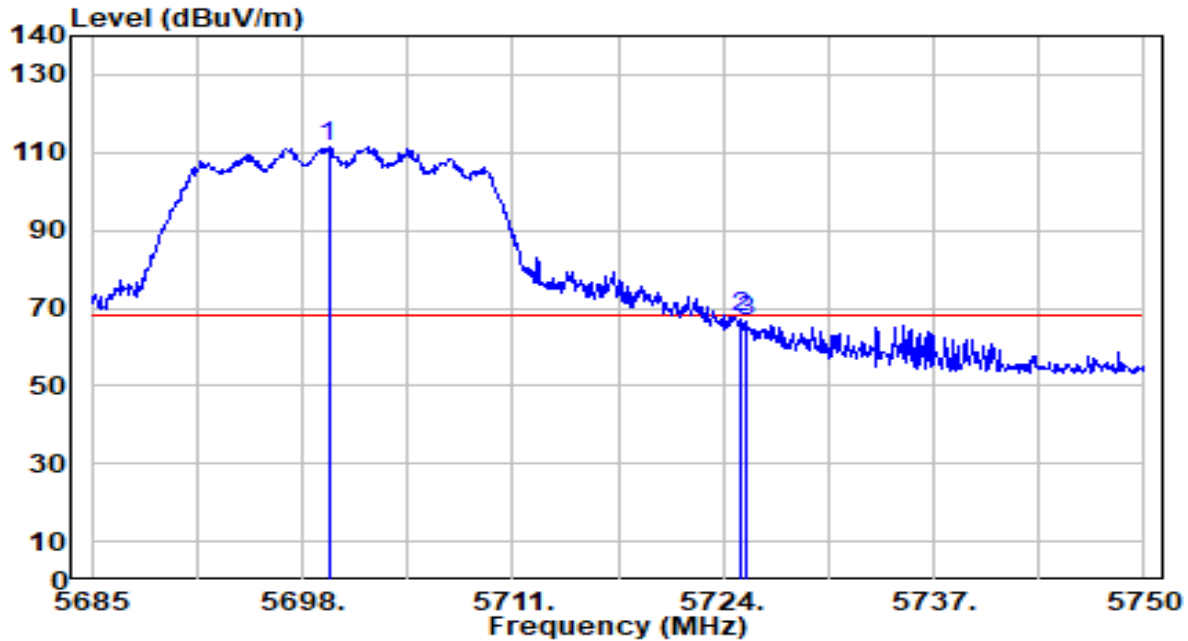


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5699.625	111.52	0.10	111.62	N/A	N/A	100	331	Peak
2	* 5725.000	67.38	0.23	67.61	-0.59	68.20	100	331	Peak
3	5725.430	66.22	0.23	66.45	-1.75	68.20	100	331	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

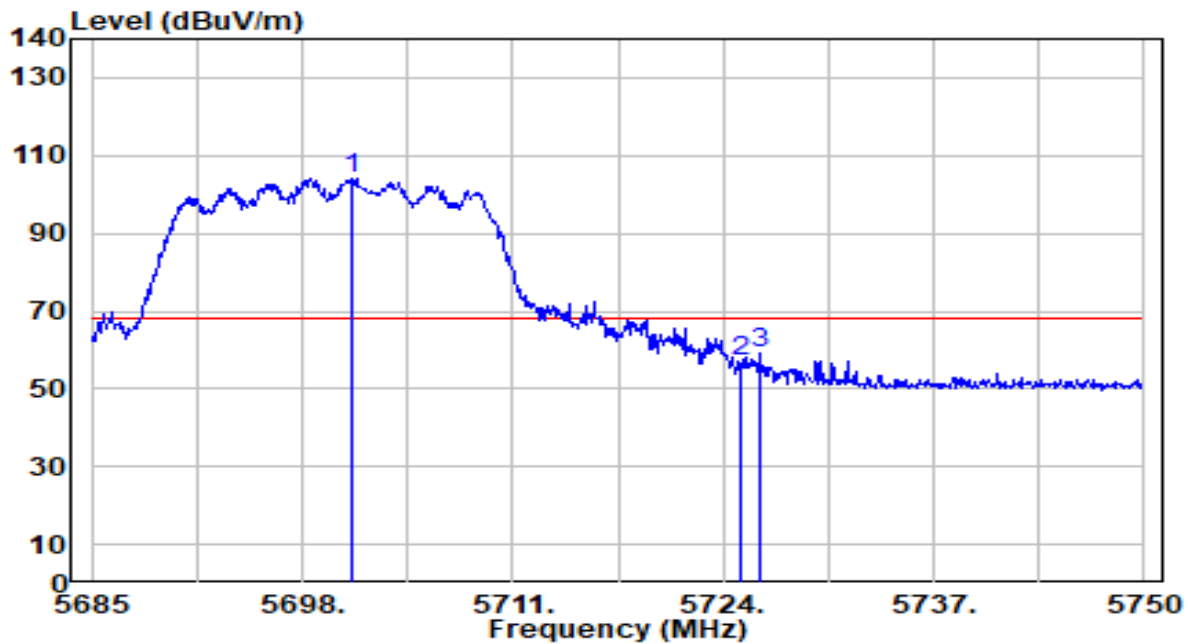


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5701.055	104.07	0.10	104.18	N/A	N/A	114	5	Peak
2	5725.000	56.60	0.23	56.83	-11.37	68.20	114	5	Peak
3	* 5726.210	59.07	0.24	59.30	-8.90	68.20	114	5	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

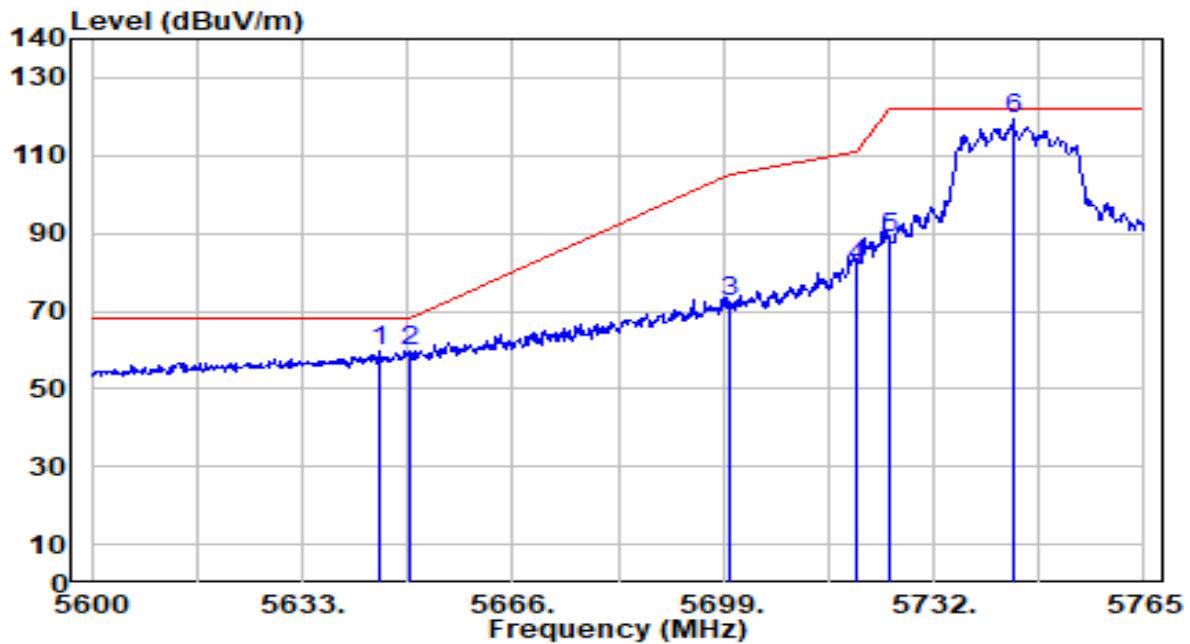


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5645.045	59.67	-0.19	59.48	-8.72	68.20	118	327	Peak
2	* 5650.000	60.09	-0.16	59.93	-8.27	68.20	118	327	Peak
3	5700.000	72.11	0.10	72.21	-32.99	105.20	118	327	Peak
4	5720.000	81.30	0.20	81.50	-29.30	110.80	118	327	Peak
5	5725.000	88.35	0.23	88.58	-33.62	122.20	118	327	Peak
6	5744.540	118.98	0.33	119.31	N/A	N/A	118	327	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

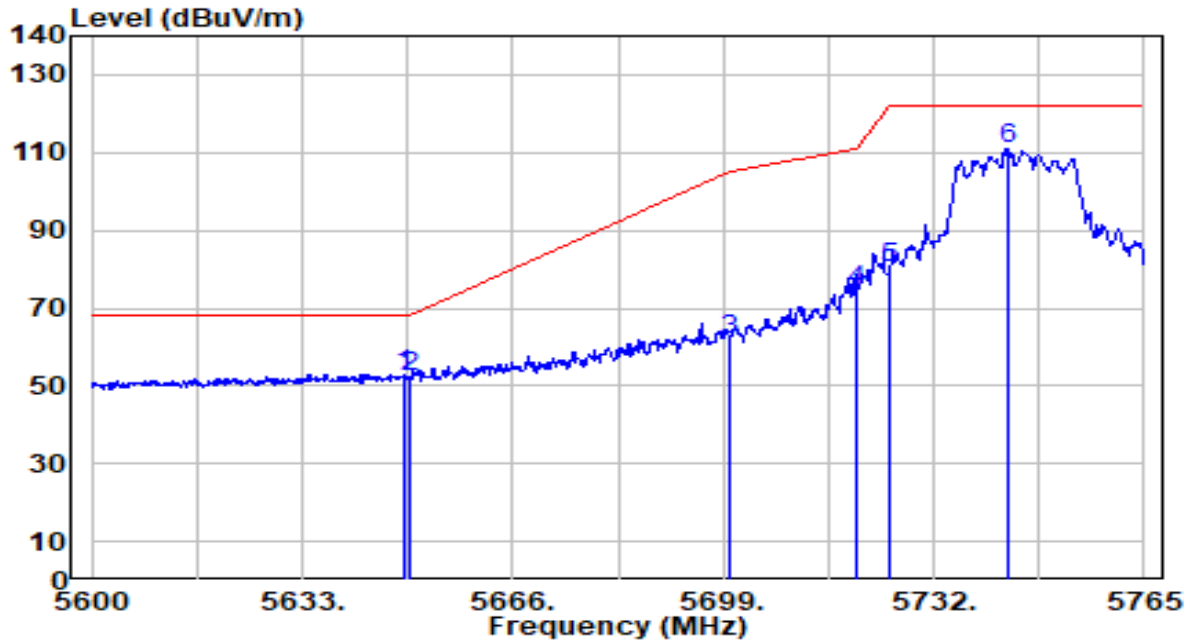


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5648.840	53.20	-0.17	53.03	-15.17	68.20	109	7	Peak
2	5650.000	52.71	-0.16	52.55	-15.65	68.20	109	7	Peak
3	5700.000	61.62	0.10	61.72	-43.48	105.20	109	7	Peak
4	5720.000	74.27	0.20	74.47	-36.33	110.80	109	7	Peak
5	5725.000	80.25	0.23	80.48	-41.72	122.20	109	7	Peak
6	5743.550	110.63	0.33	110.96	N/A	N/A	109	7	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

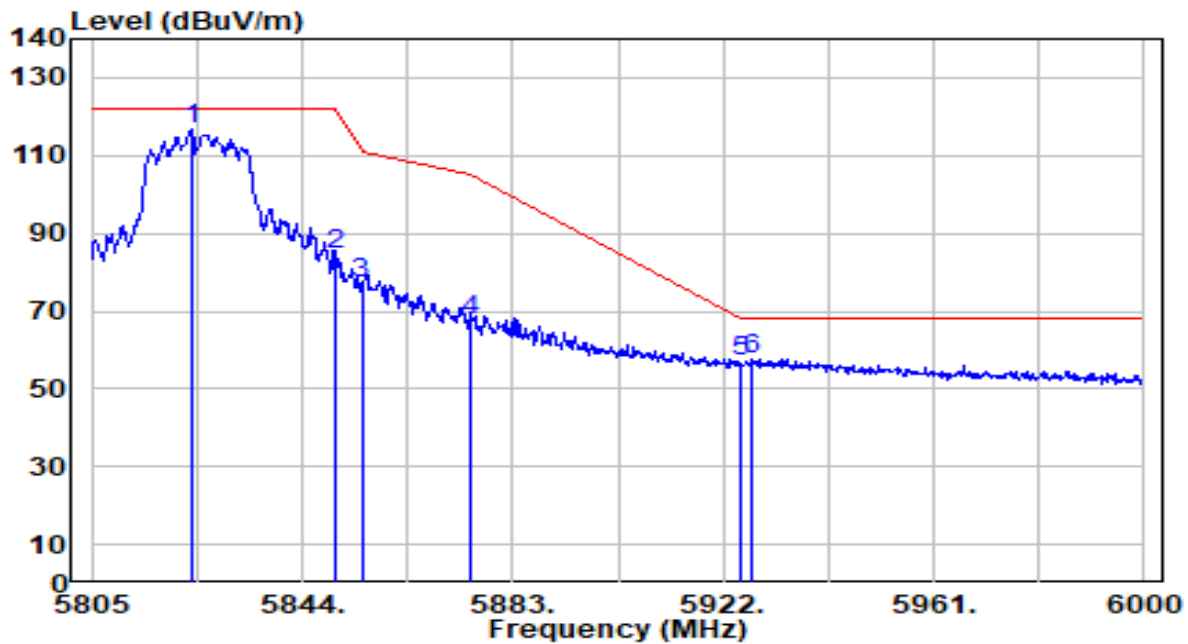


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.720	115.99	0.60	116.59	N/A	N/A	109	0	Peak
2	5850.000	83.91	0.58	84.49	-37.71	122.20	109	0	Peak
3	5855.000	76.35	0.58	76.93	-33.87	110.80	109	0	Peak
4	5875.000	67.26	0.57	67.82	-37.38	105.20	109	0	Peak
5	5925.000	56.54	0.53	57.07	-11.13	68.20	109	0	Peak
6	* 5927.460	57.28	0.53	57.81	-10.39	68.20	109	0	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

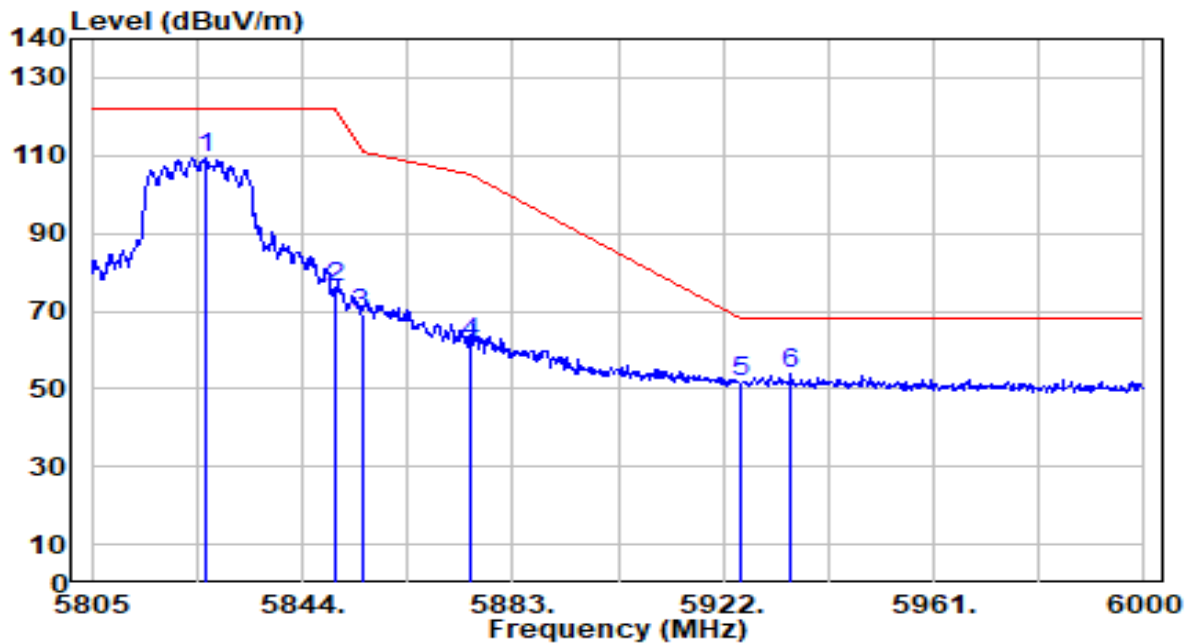


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.060	108.69	0.60	109.29	N/A	N/A	111	7	Peak
2	5850.000	75.45	0.58	76.03	-46.17	122.20	111	7	Peak
3	5855.000	68.78	0.58	69.36	-41.44	110.80	111	7	Peak
4	5875.000	61.23	0.57	61.80	-43.40	105.20	111	7	Peak
5	5925.000	51.17	0.53	51.70	-16.50	68.20	111	7	Peak
6	* 5934.675	53.12	0.52	53.64	-14.56	68.20	111	7	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

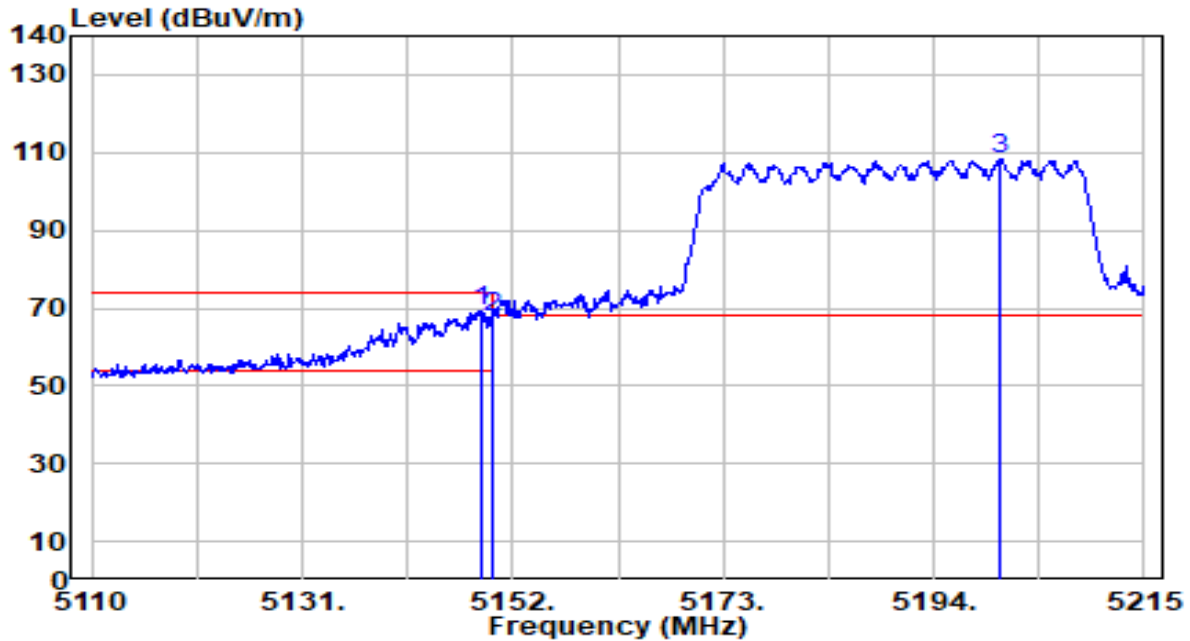


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.955	69.99	-0.72	69.27	-4.73	74.00	290	360	Peak
2	5150.000	68.26	-0.72	67.55	-6.45	74.00	290	360	Peak
3	5200.615	109.31	-0.74	108.56	N/A	N/A	290	360	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

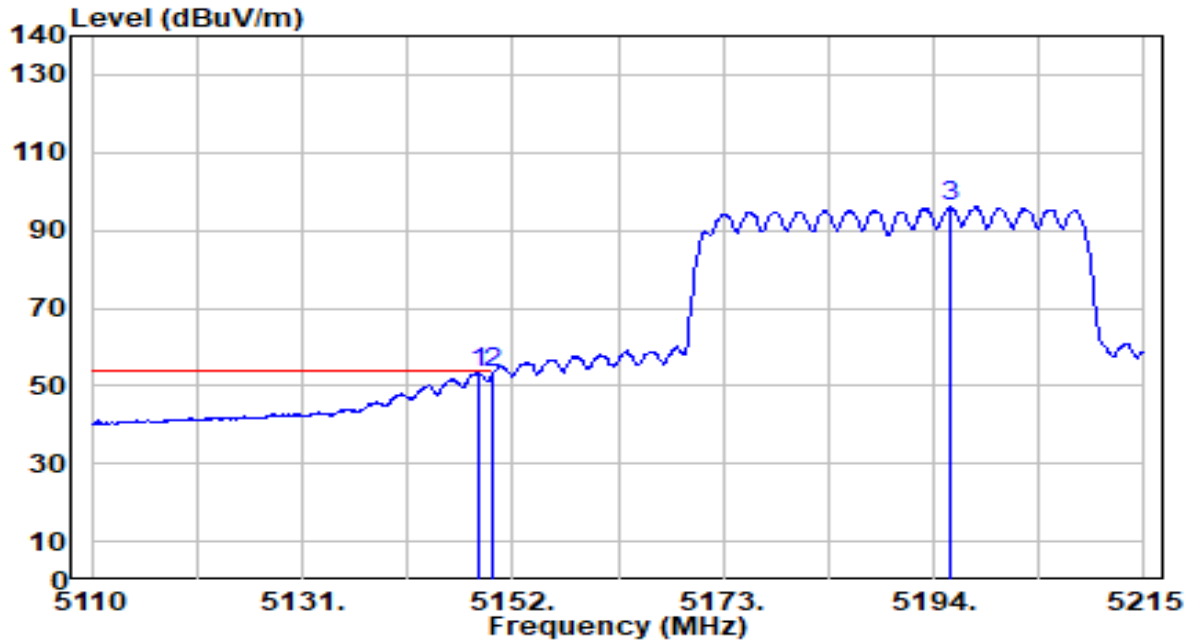


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.640	54.21	-0.72	53.49	-0.51	54.00	290	360	Average
2	5150.000	53.97	-0.72	53.25	-0.75	54.00	290	360	Average
3	5195.680	96.67	-0.74	95.93	N/A	N/A	290	360	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

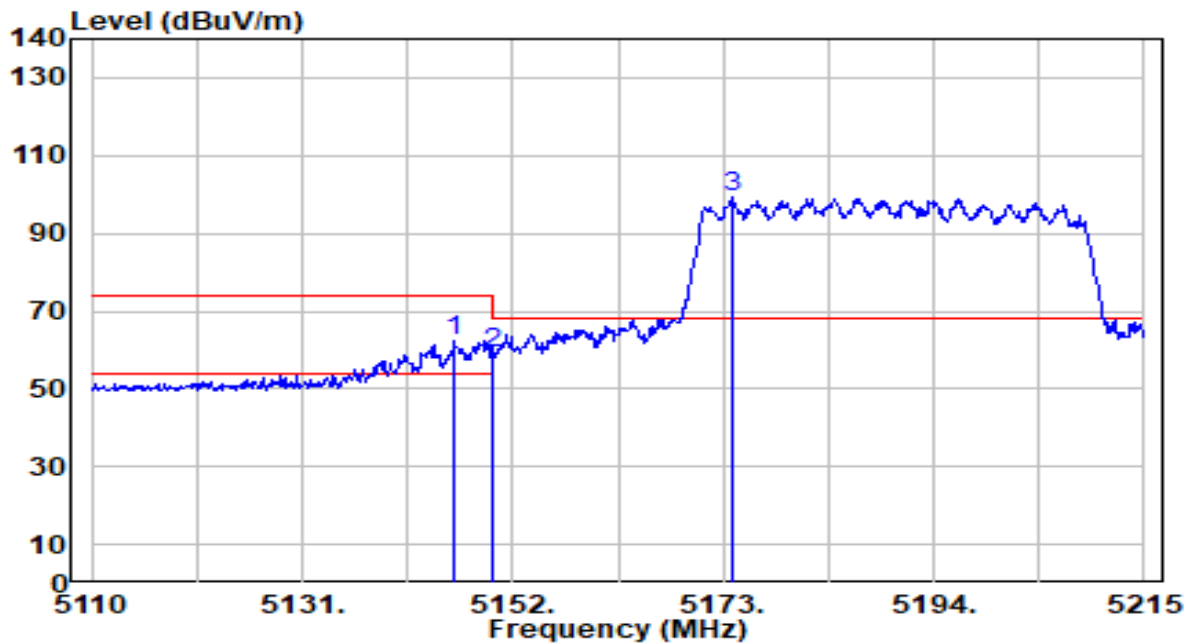


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5146.120	63.06	-0.72	62.35	-11.65	74.00	290	0	Peak
2	5150.000	59.66	-0.72	58.95	-15.05	74.00	290	0	Peak
3	5174.050	100.08	-0.73	99.34	N/A	N/A	290	0	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

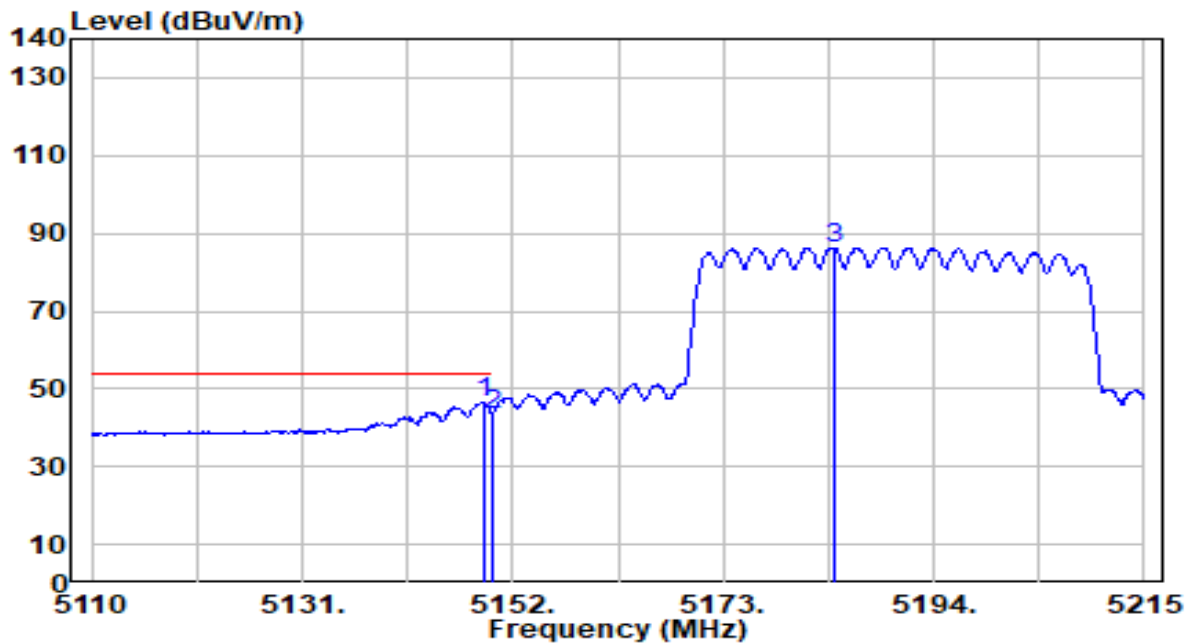


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5149.060	47.15	-0.72	46.43	-7.57	54.00	290	0	Average
2	5150.000	44.19	-0.72	43.47	-10.53	54.00	290	0	Average
3	5184.130	87.05	-0.74	86.32	N/A	N/A	290	0	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

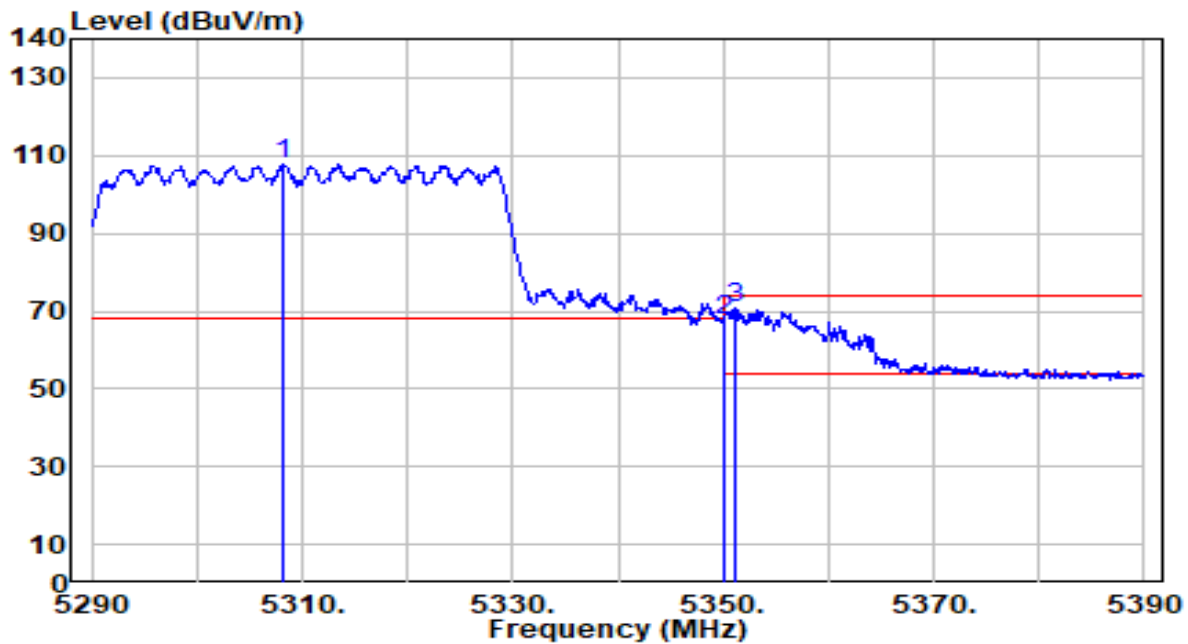


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5308.300	108.68	-0.91	107.77	N/A	N/A	280	360	Peak
2	5350.000	68.67	-0.97	67.70	-6.30	74.00	280	360	Peak
3	* 5351.100	71.61	-0.97	70.64	-3.36	74.00	280	360	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

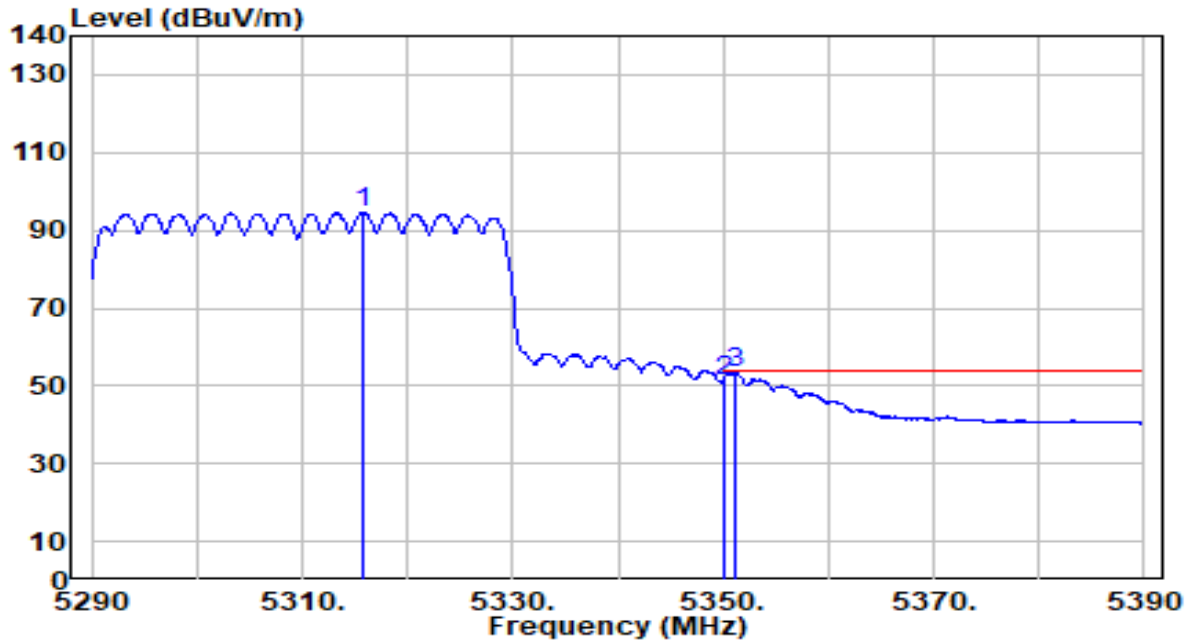


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5315.800	95.63	-0.92	94.71	N/A	N/A	280	360	Average
2	5350.000	52.44	-0.97	51.47	-2.53	54.00	280	360	Average
3	* 5351.200	54.45	-0.97	53.48	-0.52	54.00	280	360	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

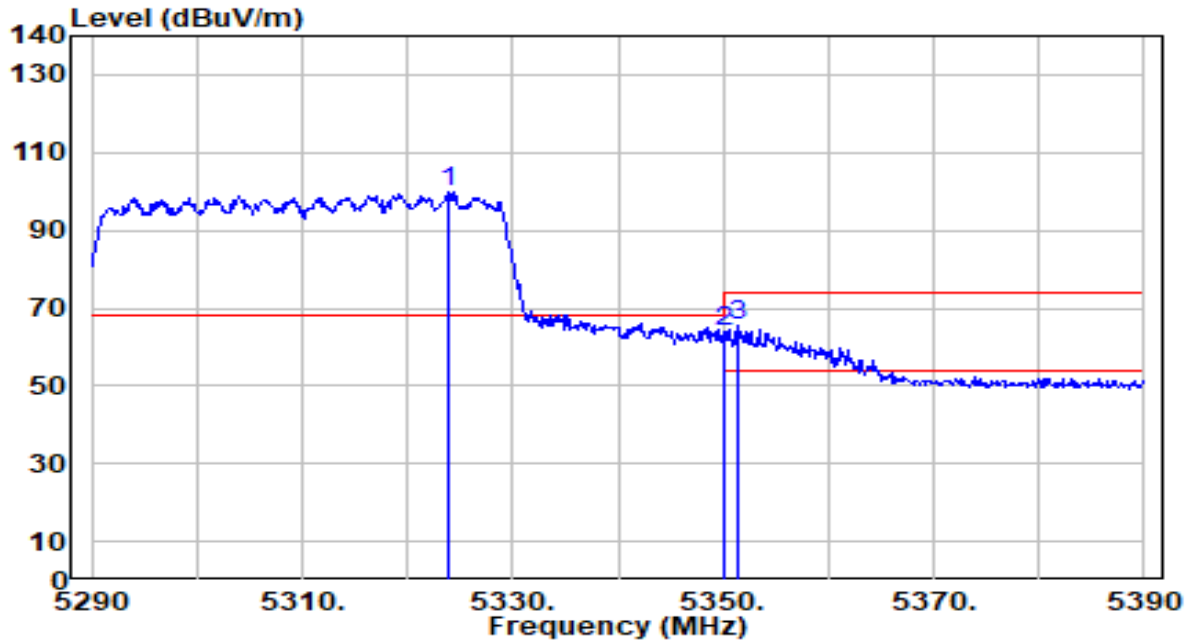


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5323.800	100.97	-0.93	100.03	N/A	N/A	207	327	Peak
2	5350.000	64.80	-0.97	63.83	-10.17	74.00	207	327	Peak
3	* 5351.400	66.38	-0.97	65.41	-8.59	74.00	207	327	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

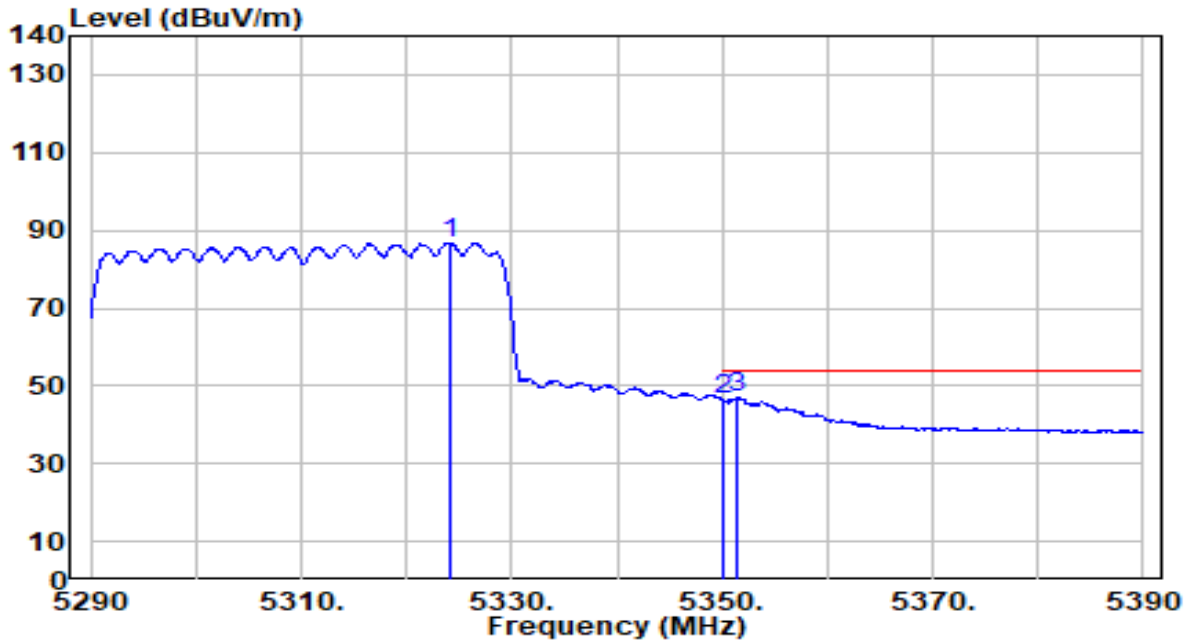


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5324.100	87.62	-0.93	86.69	N/A	N/A	207	327	Average
2	5350.000	47.45	-0.97	46.48	-7.52	54.00	207	327	Average
3	* 5351.500	48.01	-0.97	47.03	-6.97	54.00	207	327	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

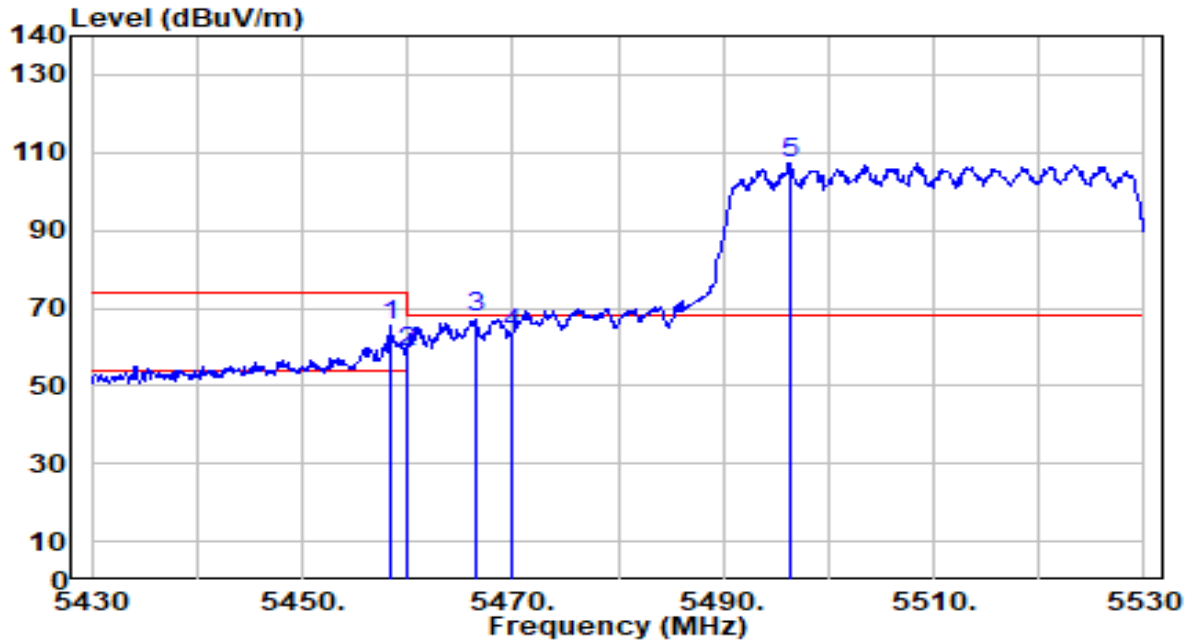


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.300	66.21	-0.87	65.33	-8.67	74.00	150	360	Peak
2	5460.000	59.31	-0.87	58.44	-15.56	74.00	150	360	Peak
3	* 5466.400	68.48	-0.85	67.63	-0.57	68.20	150	360	Peak
4	5470.000	64.20	-0.84	63.36	-4.84	68.20	150	360	Peak
5	5496.300	107.91	-0.76	107.15	N/A	N/A	150	360	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

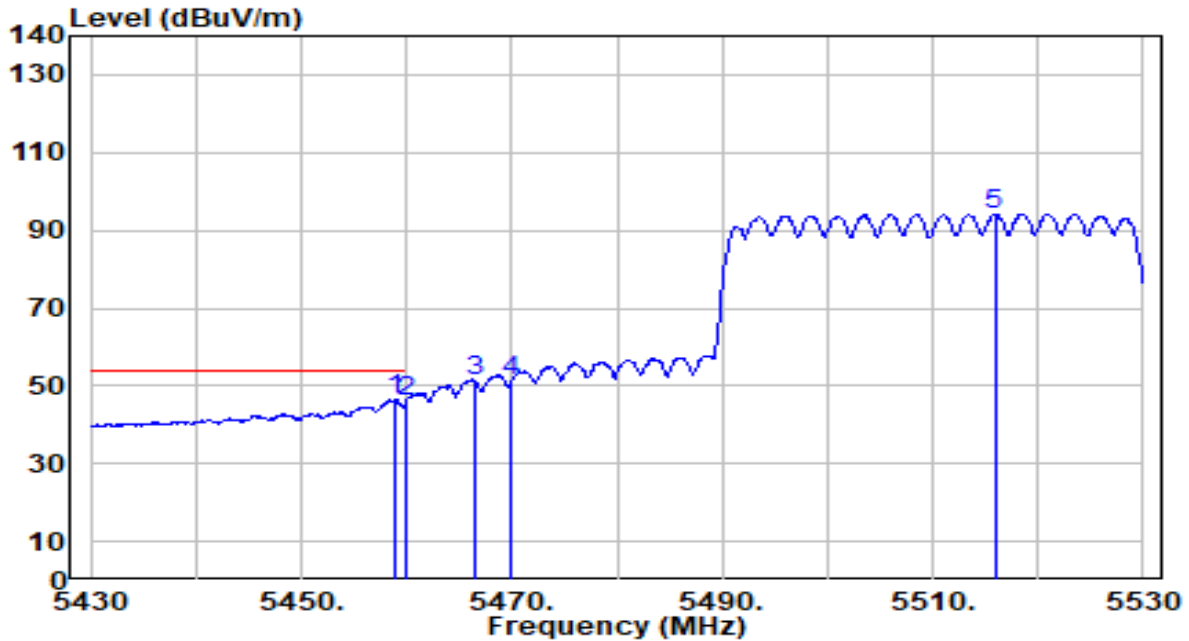


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5458.800	47.37	-0.87	46.50	-7.50	54.00	150	360	Average
2	5460.000	46.74	-0.87	45.87	-8.13	54.00	150	360	Average
3	5466.400	52.19	-0.85	51.33	N/A	N/A	150	360	Average
4	5470.000	51.83	-0.84	50.99	N/A	N/A	150	360	Average
5	5515.900	95.00	-0.70	94.30	N/A	N/A	150	360	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

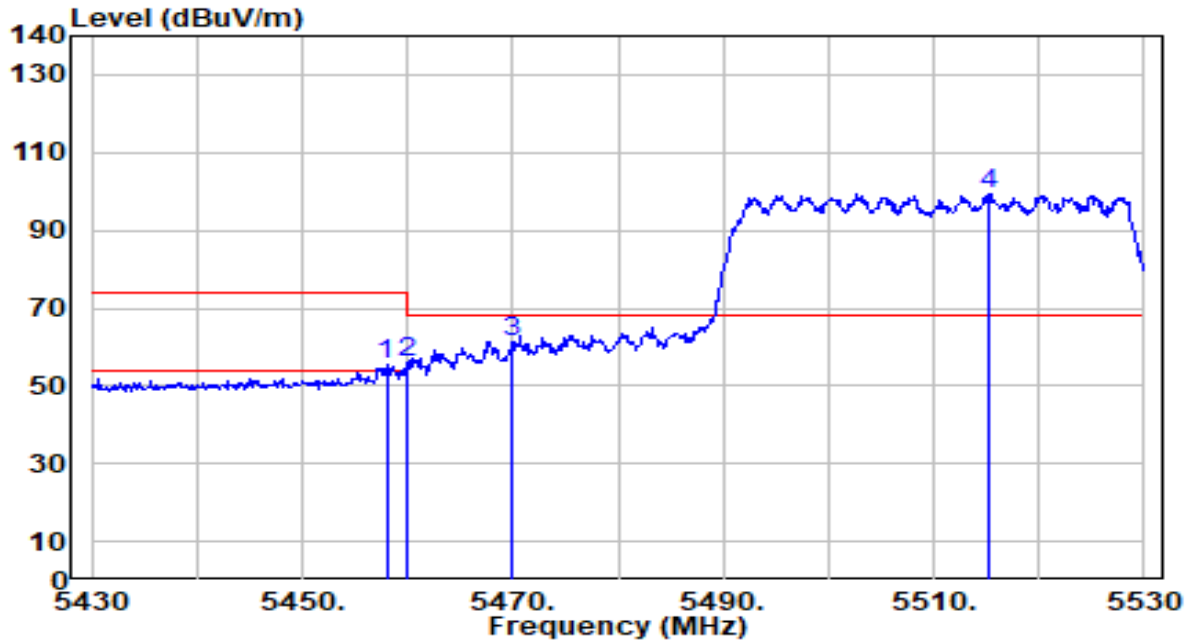


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.000	56.57	-0.88	55.70	-18.30	74.00	300	26	Peak
2	5460.000	57.06	-0.87	56.19	-17.81	74.00	300	26	Peak
3	* 5470.000	62.23	-0.84	61.39	-6.81	68.20	300	26	Peak
4	5515.200	99.83	-0.70	99.13	N/A	N/A	300	26	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

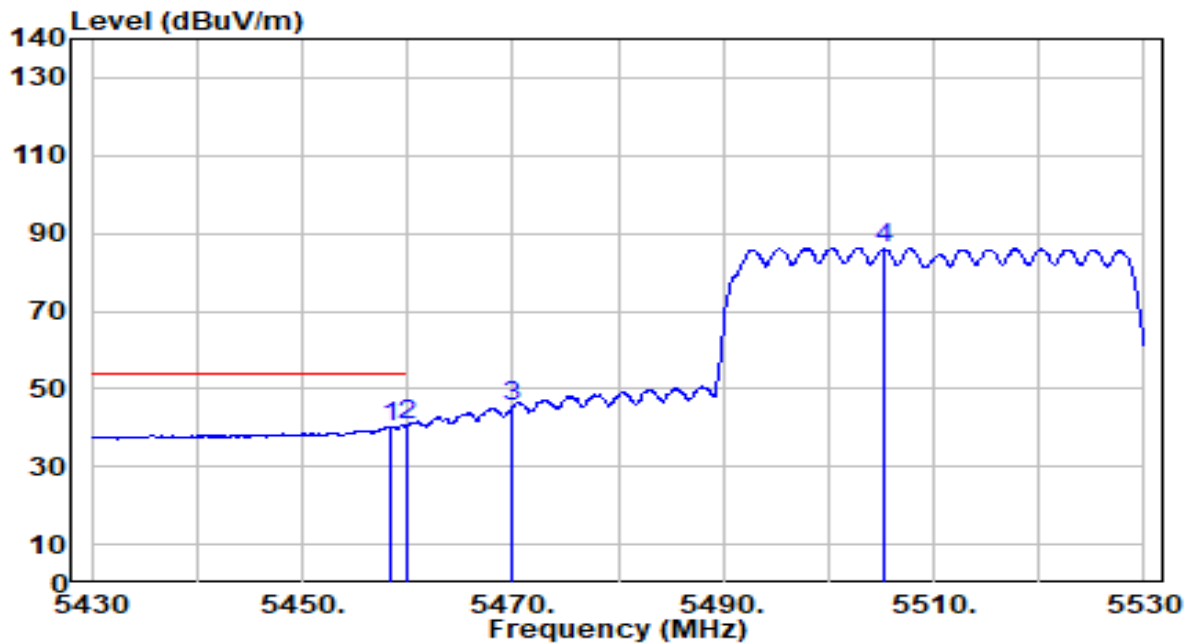


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.300	41.12	-0.87	40.25	-13.75	54.00	300	26	Average
2	* 5460.000	41.63	-0.87	40.77	-13.23	54.00	300	26	Average
3	5470.000	46.20	-0.84	45.36	N/A	N/A	300	26	Average
4	5505.400	86.92	-0.73	86.18	N/A	N/A	300	26	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

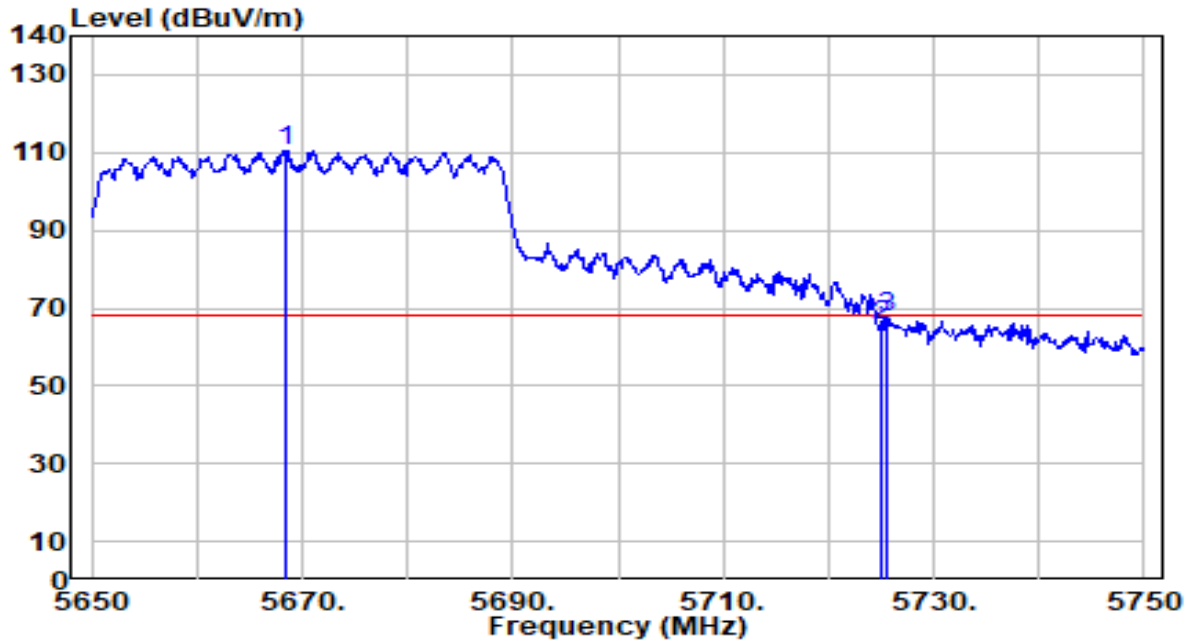


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5668.500	110.41	-0.07	110.34	N/A	N/A	141	360	Peak
2	5725.000	65.08	0.23	65.31	-2.89	68.20	141	360	Peak
3	* 5725.500	67.47	0.23	67.70	-0.50	68.20	141	360	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

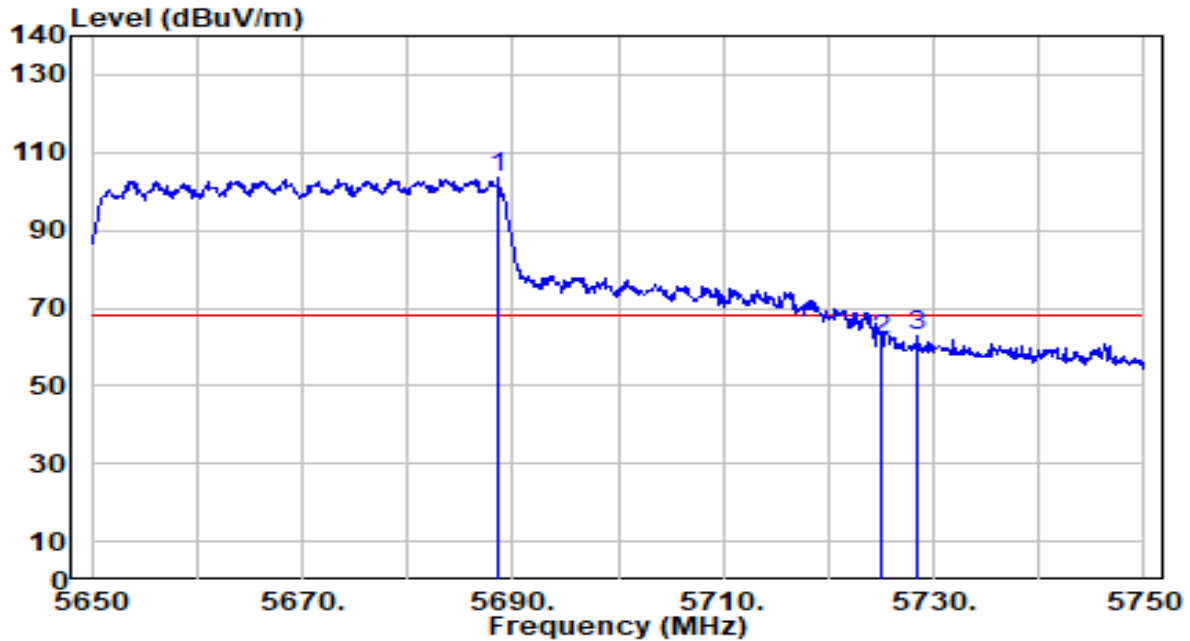


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5688.600	103.30	0.04	103.34	N/A	N/A	106	12	Peak
2	5725.000	61.83	0.23	62.06	-6.14	68.20	106	12	Peak
3	* 5728.500	62.72	0.25	62.97	-5.23	68.20	106	12	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

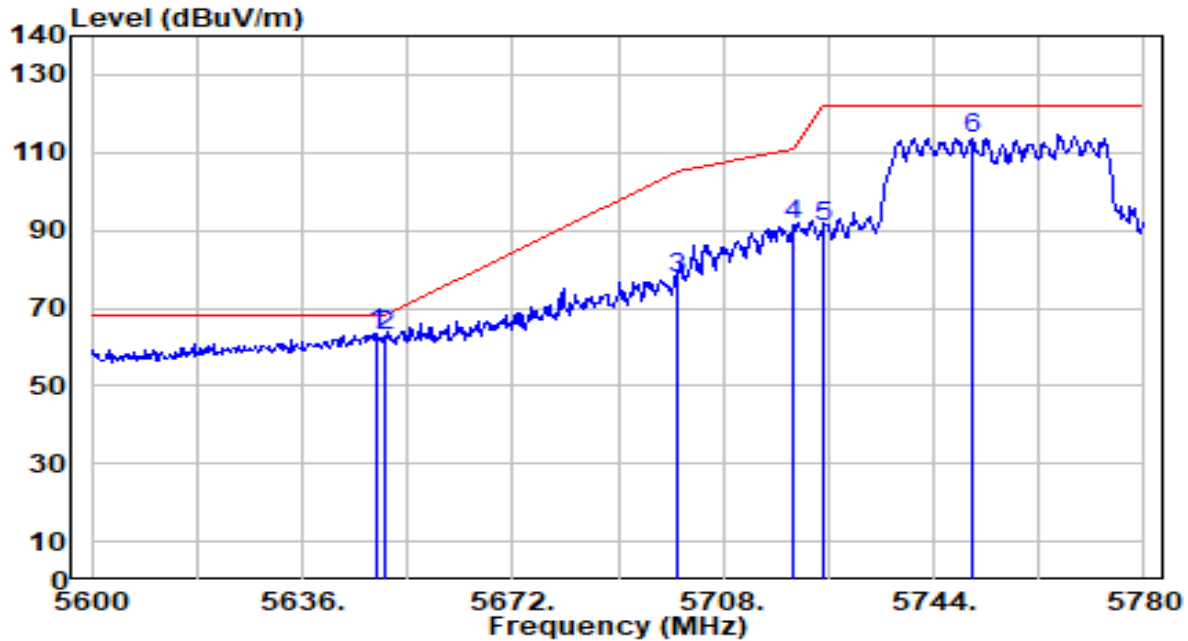


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5648.600	63.49	-0.17	63.32	-4.88	68.20	100	350	Peak
2	5650.000	62.94	-0.16	62.78	-5.42	68.20	100	350	Peak
3	5700.000	77.51	0.10	77.61	-27.59	105.20	100	350	Peak
4	5720.000	91.22	0.20	91.42	-19.38	110.80	100	350	Peak
5	5725.000	90.53	0.23	90.75	-31.45	122.20	100	350	Peak
6	5750.660	113.47	0.36	113.84	N/A	N/A	100	350	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

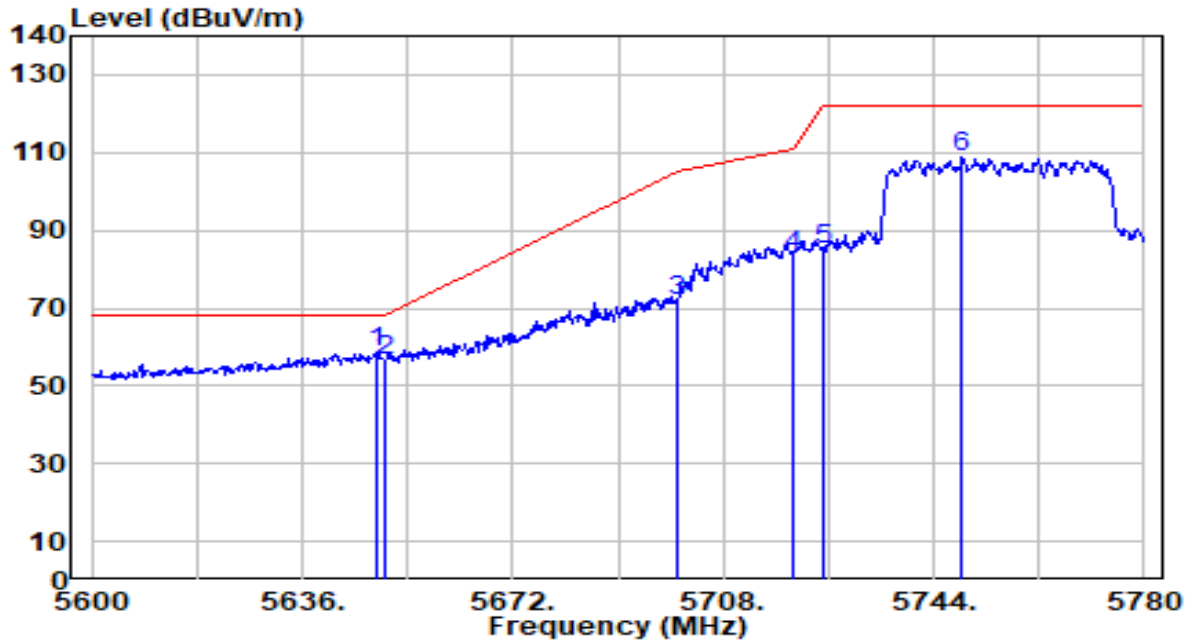


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5648.600	58.81	-0.17	58.64	-9.56	68.20	103	11	Peak
2	5650.000	56.46	-0.16	56.30	-11.90	68.20	103	11	Peak
3	5700.000	71.94	0.10	72.04	-33.16	105.20	103	11	Peak
4	5720.000	83.50	0.20	83.70	-27.10	110.80	103	11	Peak
5	5725.000	85.08	0.23	85.31	-36.89	122.20	103	11	Peak
6	5748.860	108.54	0.35	108.90	N/A	N/A	103	11	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

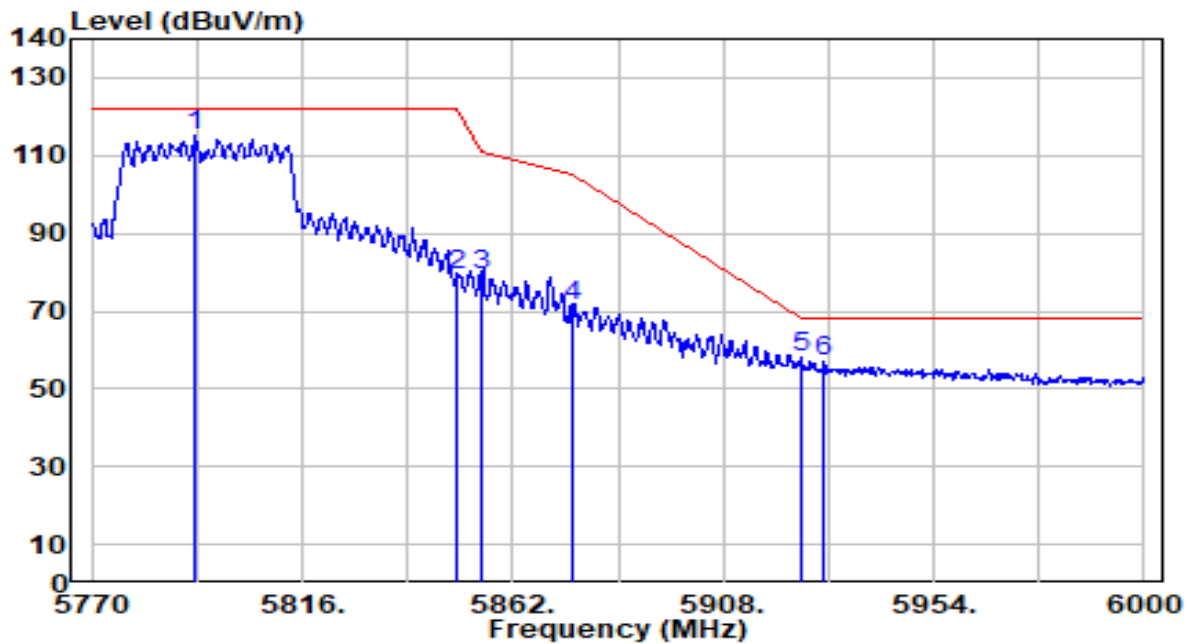


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5792.540	114.80	0.58	115.38	N/A	N/A	100	346	Peak
2	5850.000	78.85	0.58	79.43	-42.77	122.20	100	346	Peak
3	5855.000	78.62	0.58	79.20	-31.60	110.80	100	346	Peak
4	5875.000	71.01	0.57	71.57	-33.63	105.20	100	346	Peak
5	* 5925.000	57.39	0.53	57.92	-10.28	68.20	100	346	Peak
6	5929.850	56.66	0.52	57.19	-11.01	68.20	100	346	Peak

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

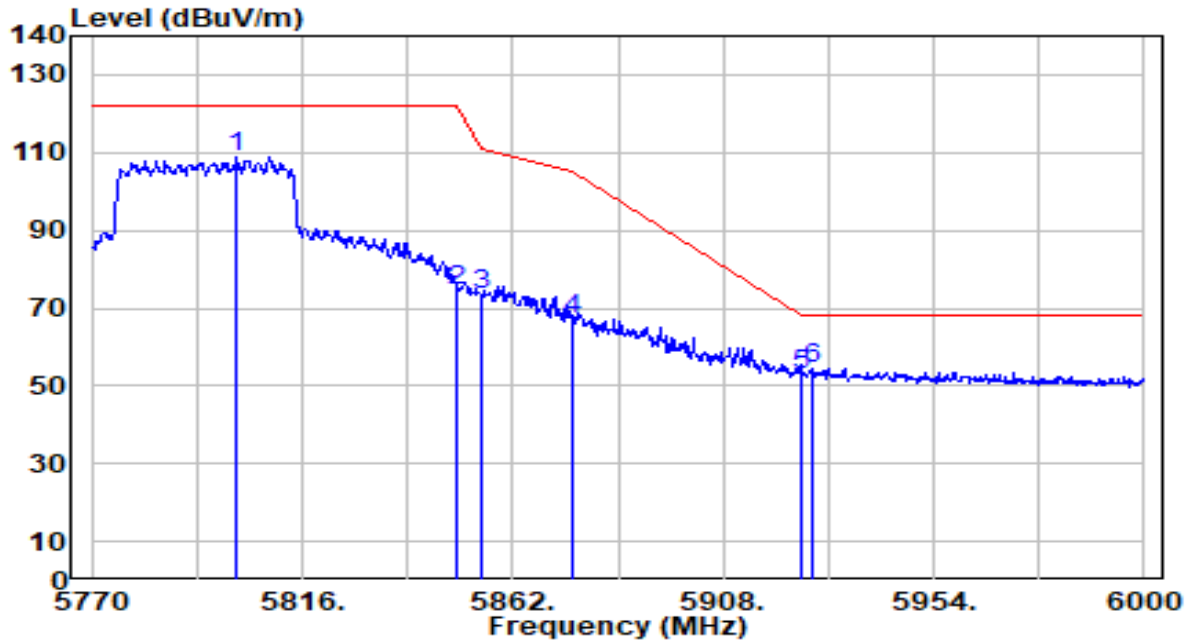


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5801.510	108.05	0.62	108.67	N/A	N/A	101	13	Peak
2	5850.000	73.81	0.58	74.39	-47.81	122.20	101	13	Peak
3	5855.000	72.68	0.58	73.26	-37.54	110.80	101	13	Peak
4	5875.000	66.74	0.57	67.31	-37.89	105.20	101	13	Peak
5	5925.000	52.35	0.53	52.88	-15.32	68.20	101	13	Peak
6	* 5927.320	53.96	0.53	54.48	-13.72	68.20	101	13	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

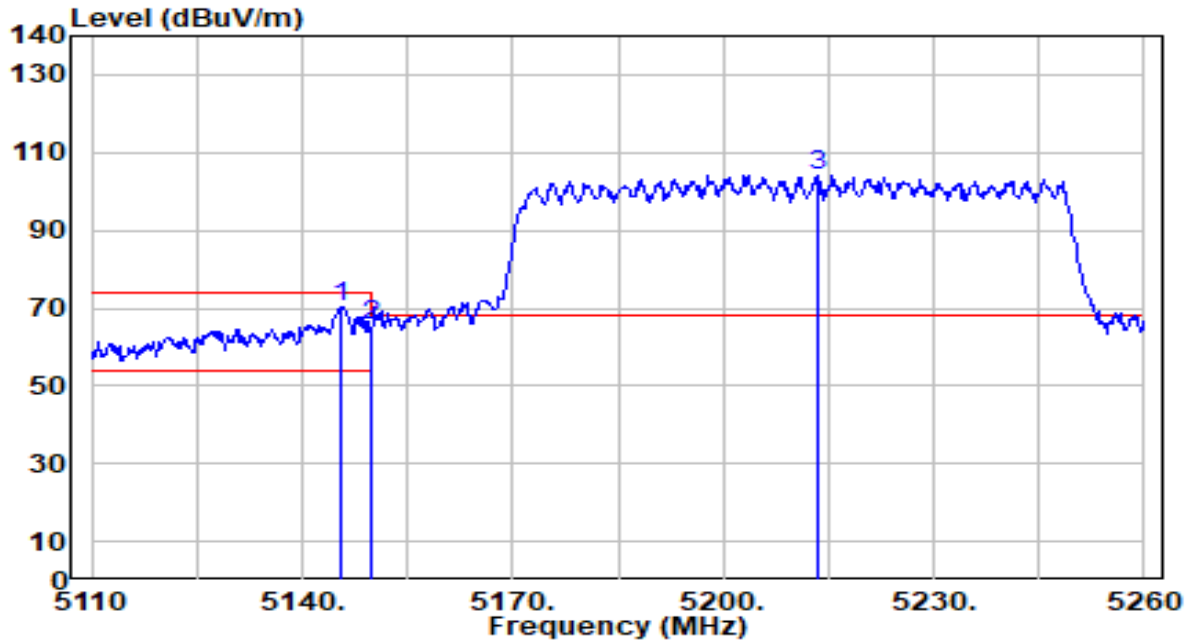


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5145.550	70.98	-0.72	70.26	-3.74	74.00	290	360	Peak
2		5150.000	66.01	-0.72	65.29	-8.71	74.00	290	360	Peak
3		5213.350	104.92	-0.76	104.15	N/A	N/A	290	360	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

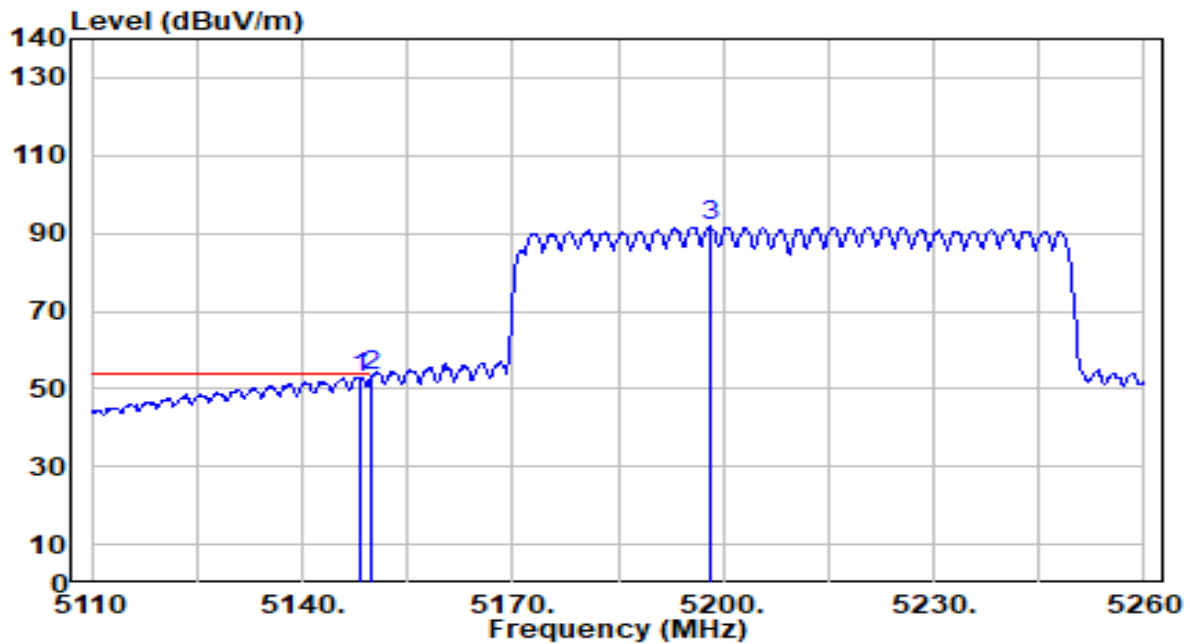


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.400	53.79	-0.72	53.07	-0.93	54.00	290	360	Average
2	* 5150.000	54.22	-0.72	53.50	-0.50	54.00	290	360	Average
3	5198.050	92.54	-0.74	91.79	N/A	N/A	290	360	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

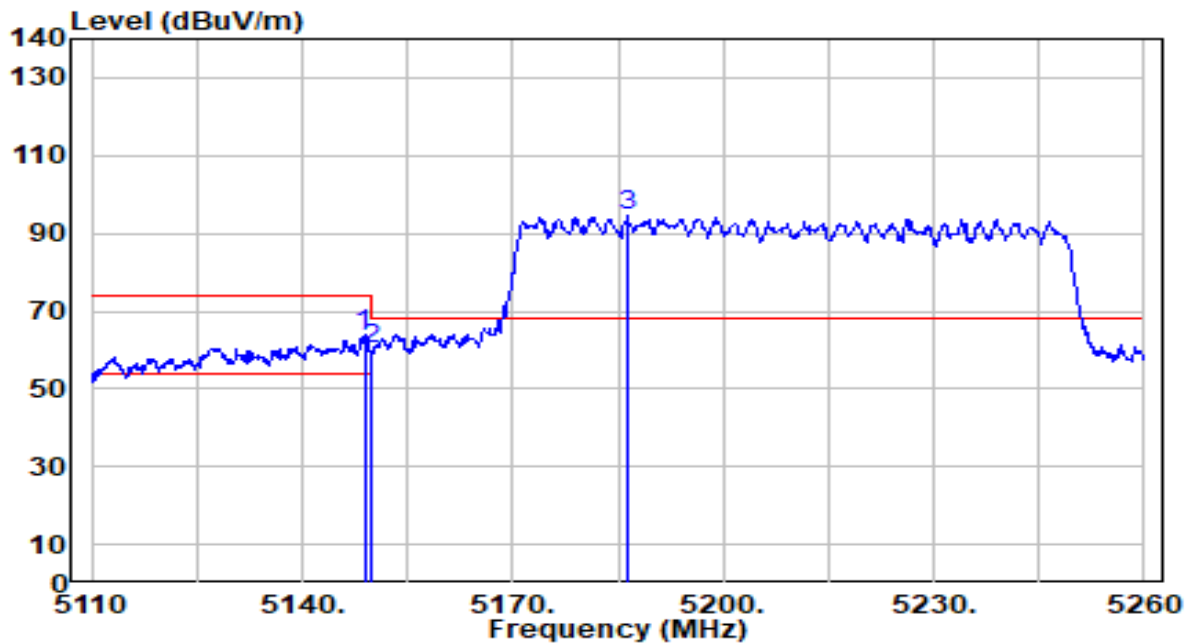


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5148.850	64.64	-0.72	63.92	-10.08	74.00	290	0	Peak
2		5150.000	60.85	-0.72	60.13	-13.87	74.00	290	0	Peak
3		5186.350	95.34	-0.74	94.60	N/A	N/A	290	0	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

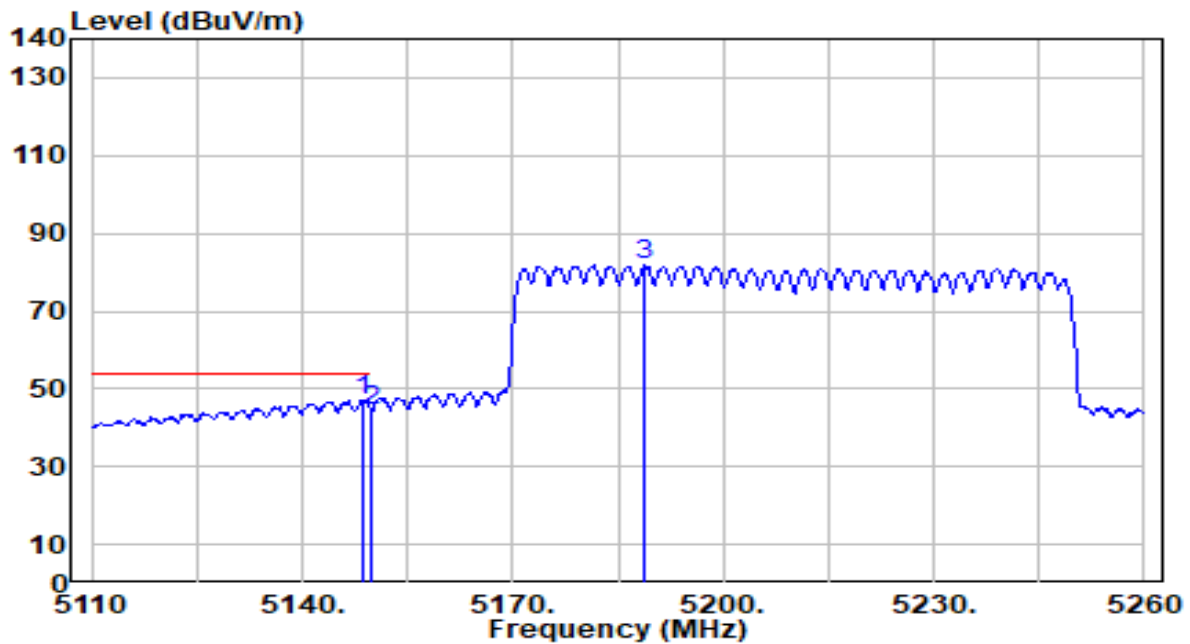


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5148.550	47.80	-0.72	47.08	-6.92	54.00	290	0	Average
2		5150.000	45.28	-0.72	44.56	-9.44	54.00	290	0	Average
3		5188.750	82.45	-0.74	81.71	N/A	N/A	290	0	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

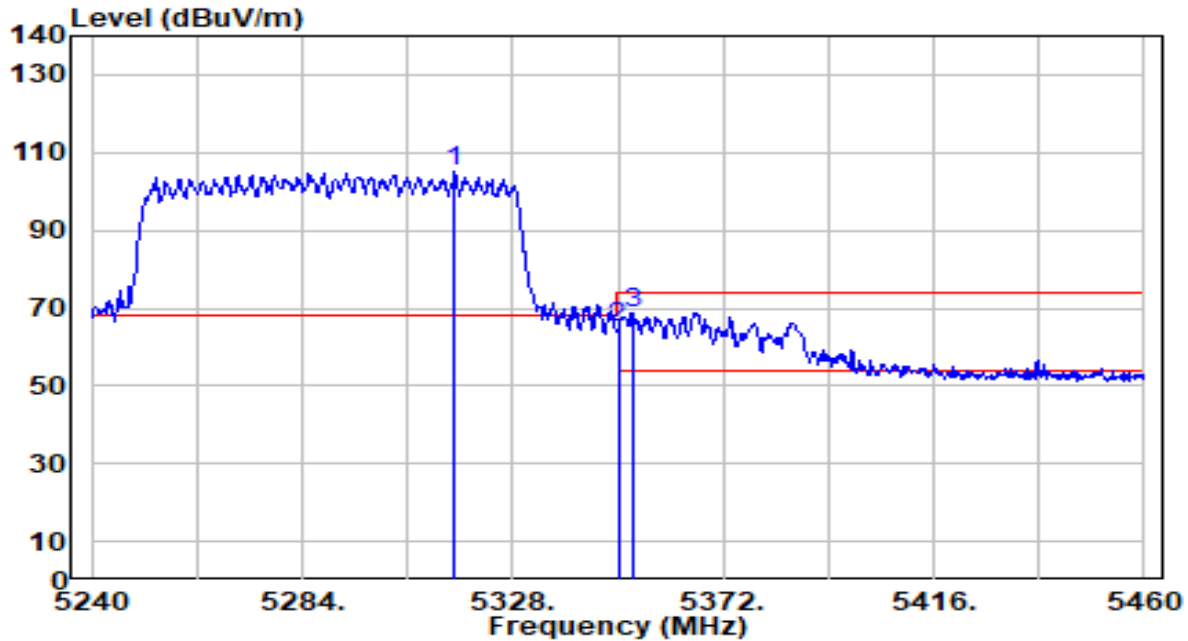


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5315.900	105.88	-0.92	104.96	N/A	N/A	280	360	Peak
2	5350.000	66.21	-0.97	65.24	-8.76	74.00	280	360	Peak
3	* 5353.300	69.84	-0.98	68.86	-5.14	74.00	280	360	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

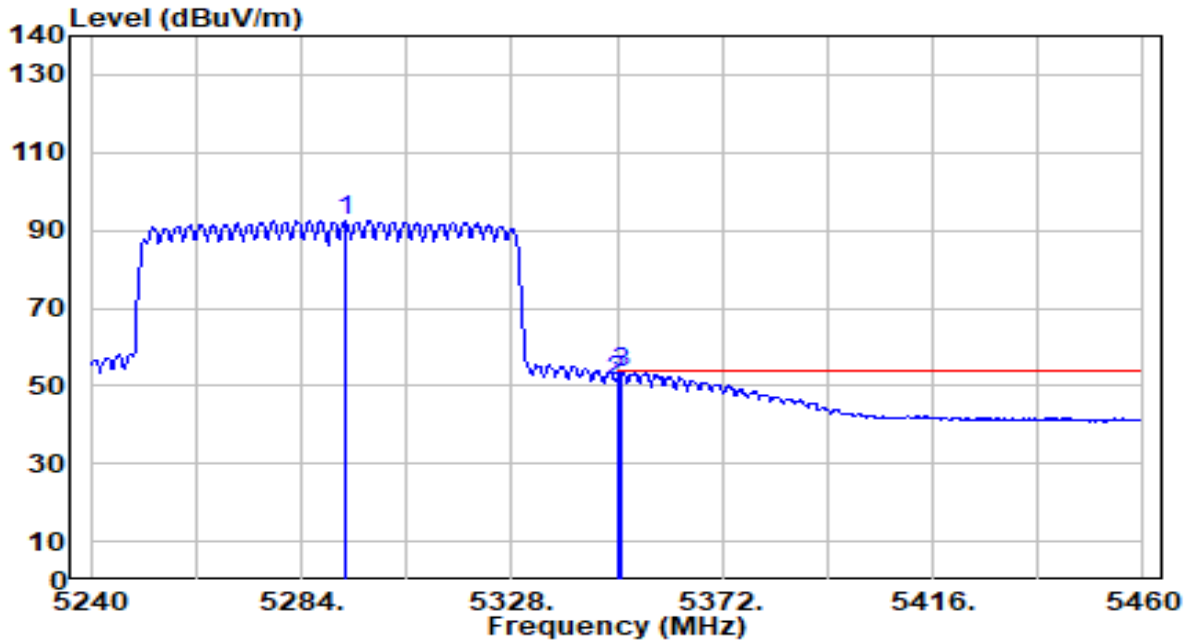


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5293.240	93.27	-0.89	92.38	N/A	N/A	280	360	Average
2	5350.000	52.47	-0.97	51.49	-2.51	54.00	280	360	Average
3	* 5351.100	54.43	-0.97	53.46	-0.54	54.00	280	360	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

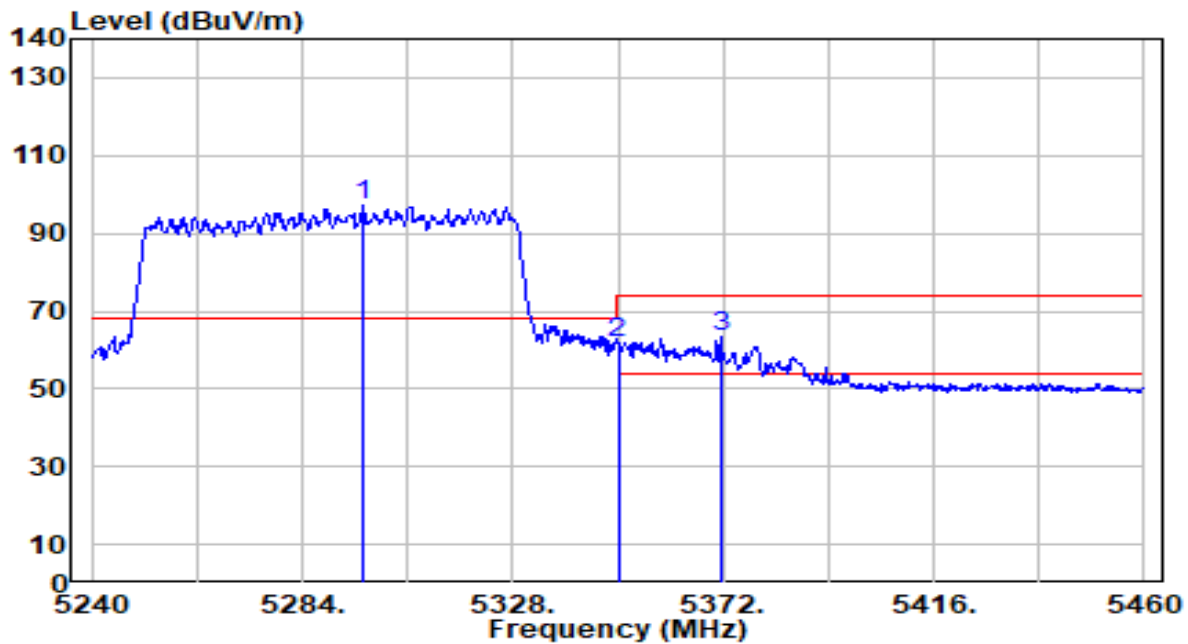


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5296.540	97.97	-0.89	97.08	N/A	N/A	208	327	Peak
2	5350.000	62.77	-0.97	61.79	-12.21	74.00	208	327	Peak
3	* 5371.560	64.19	-1.00	63.19	-10.81	74.00	208	327	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preampifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

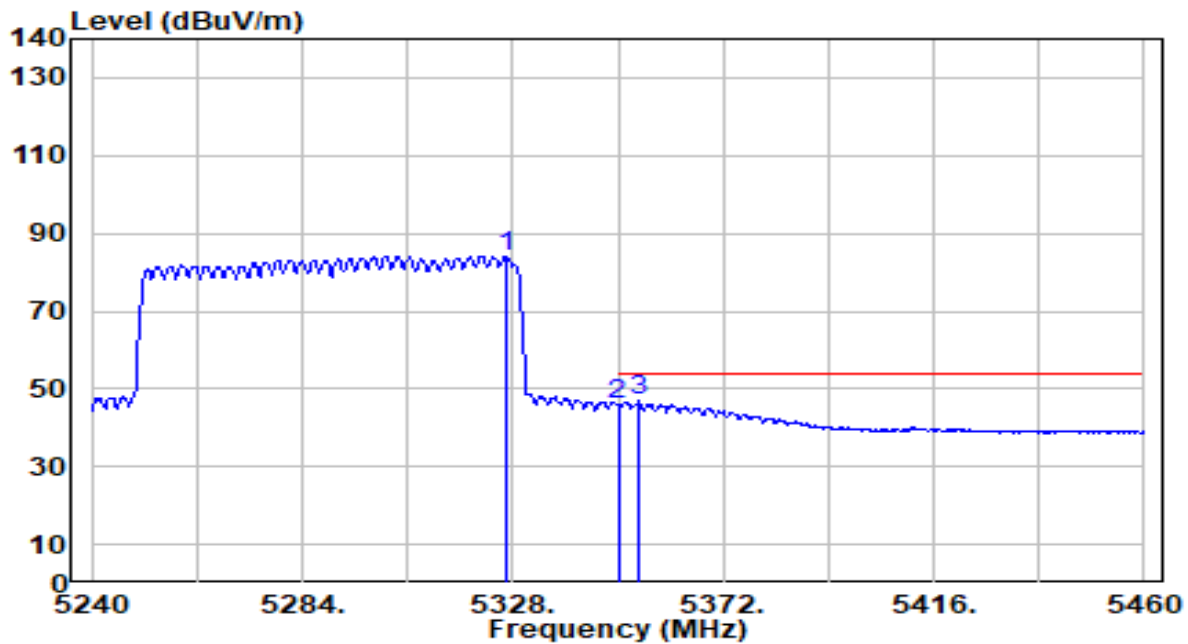


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.680	85.13	-0.94	84.19	N/A	N/A	208	327	Average
2	5350.000	46.83	-0.97	45.86	-8.14	54.00	208	327	Average
3	* 5354.400	47.76	-0.98	46.78	-7.22	54.00	208	327	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

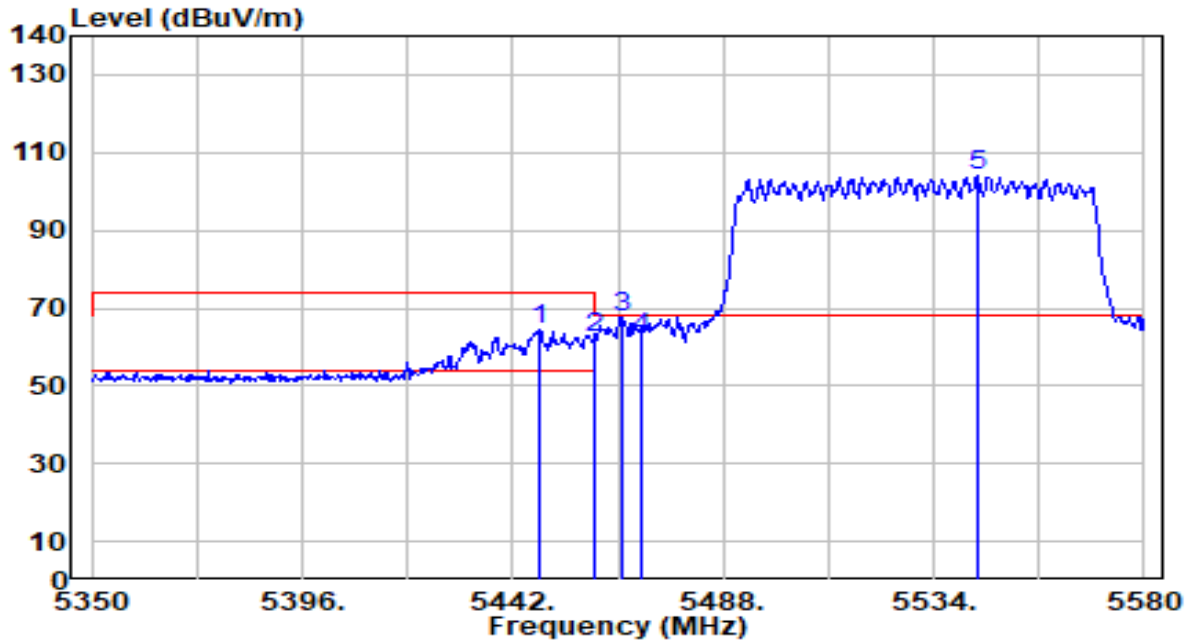


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5447.980	65.12	-0.91	64.22	-9.78	74.00	147	360	Peak
2	5460.000	63.17	-0.87	62.30	-11.70	74.00	147	360	Peak
3	* 5465.920	68.46	-0.85	67.61	-0.59	68.20	147	360	Peak
4	5470.000	63.41	-0.84	62.57	-5.63	68.20	147	360	Peak
5	5543.430	104.85	-0.61	104.24	N/A	N/A	147	360	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

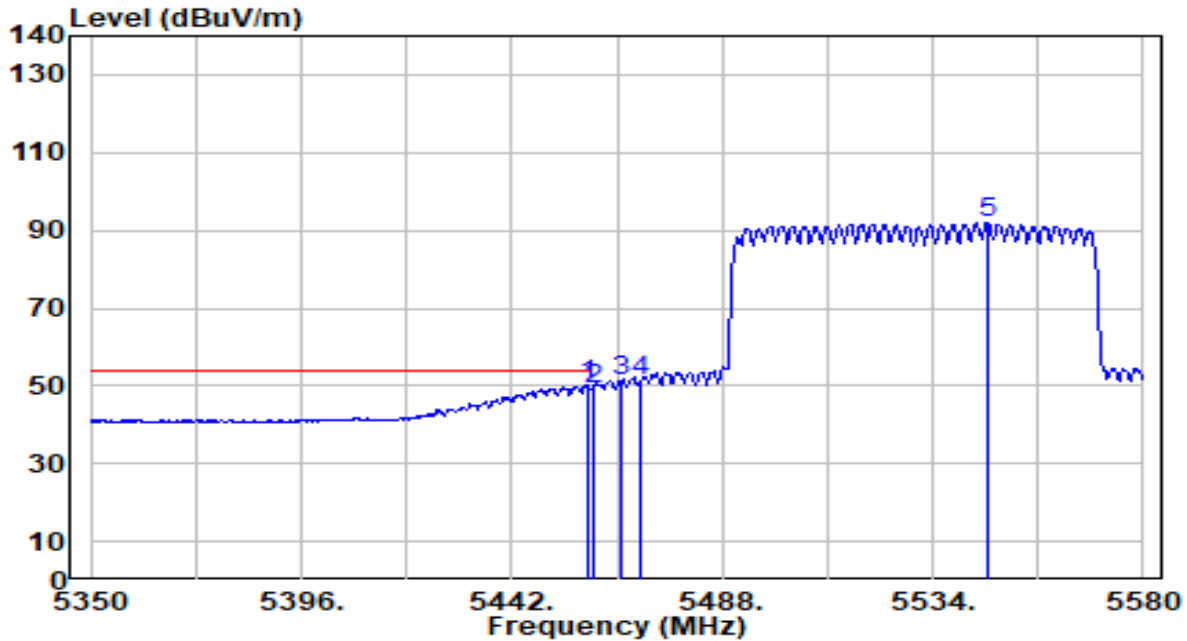


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5458.560	51.01	-0.87	50.13	-3.87	54.00	147	360	Average
2		5460.000	50.07	-0.87	49.20	-4.80	54.00	147	360	Average
3		5465.920	51.90	-0.85	51.05	N/A	N/A	147	360	Average
4		5470.000	51.87	-0.84	51.03	N/A	N/A	147	360	Average
5		5545.960	92.53	-0.60	91.93	N/A	N/A	147	360	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

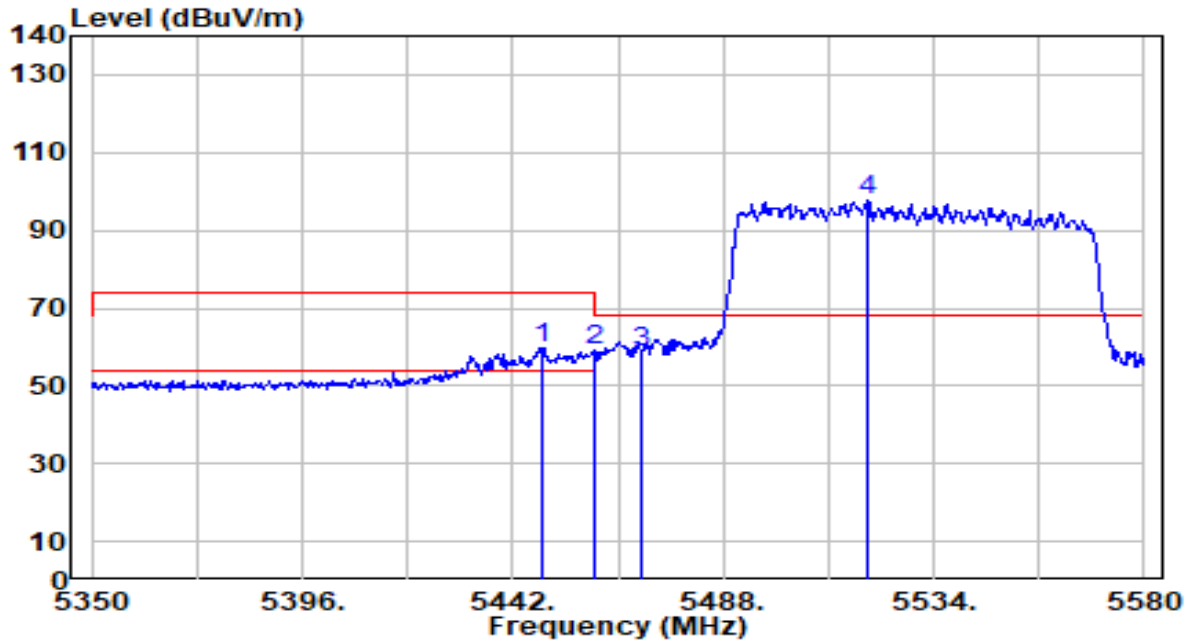


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5448.670	60.84	-0.90	59.94	-14.06	74.00	162	330	Peak
2	5460.000	60.13	-0.87	59.26	-14.74	74.00	162	330	Peak
3	* 5470.000	59.72	-0.84	58.88	-9.32	68.20	162	330	Peak
4	5519.740	98.49	-0.69	97.80	N/A	N/A	162	330	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

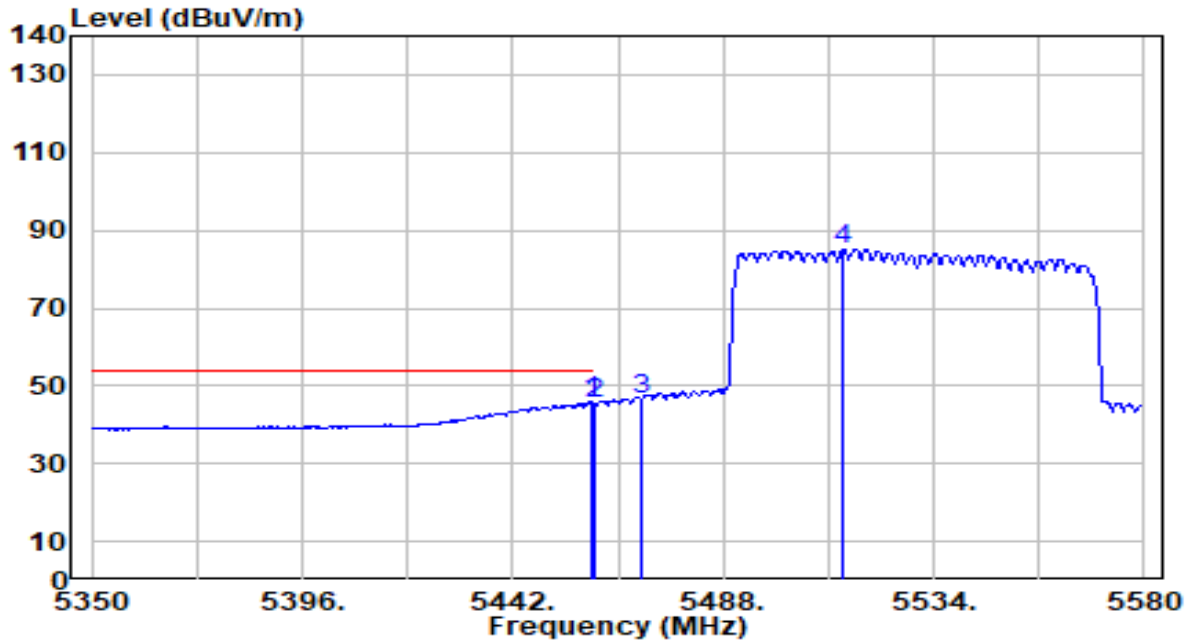


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5459.020	46.63	-0.87	45.75	-8.25	54.00	162	330	Average
2		5460.000	46.32	-0.87	45.45	-8.55	54.00	162	330	Average
3		5470.000	47.07	-0.84	46.23	N/A	N/A	162	330	Average
4		5514.220	85.86	-0.70	85.15	N/A	N/A	162	330	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

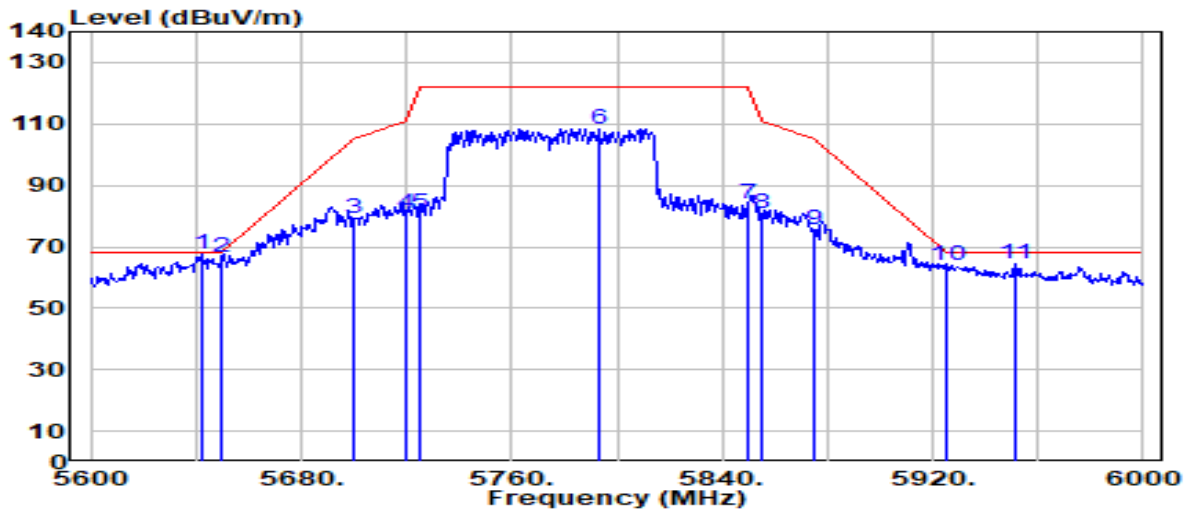


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5642.400	67.85	-0.20	67.65	-0.55	68.20	102	350	Peak
2	5650.000	66.85	-0.16	66.69	-1.51	68.20	102	350	Peak
3	5700.000	78.90	0.10	79.00	-26.20	105.20	102	350	Peak
4	5720.000	80.46	0.20	80.67	-30.13	110.80	102	350	Peak
5	5725.000	80.76	0.23	80.99	-41.21	122.20	102	350	Peak
6	5793.200	107.98	0.59	108.56	N/A	N/A	102	350	Peak
7	5850.000	83.64	0.58	84.23	-37.97	122.20	102	350	Peak
8	5855.000	80.16	0.58	80.74	-30.06	110.80	102	350	Peak
9	5875.000	75.03	0.57	75.59	-29.61	105.20	102	350	Peak
10	5925.000	63.38	0.53	63.91	-4.29	68.20	102	350	Peak
11	5951.200	63.81	0.51	64.32	-3.88	68.20	102	350	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

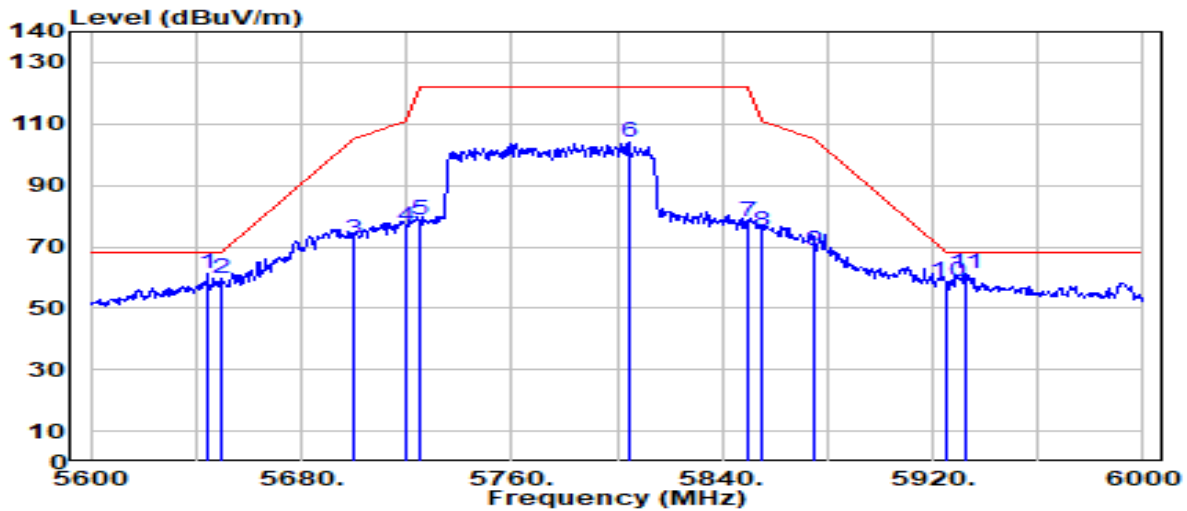


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5644.400	61.29	-0.19	61.10	-7.10	68.20	114	12	Peak
2	5650.000	59.69	-0.16	59.52	-8.68	68.20	114	12	Peak
3	5700.000	72.44	0.10	72.54	-32.66	105.20	114	12	Peak
4	5720.000	76.22	0.20	76.43	-34.37	110.80	114	12	Peak
5	5725.000	78.42	0.23	78.65	-43.55	122.20	114	12	Peak
6	5804.400	103.71	0.62	104.32	N/A	N/A	114	12	Peak
7	5850.000	77.49	0.58	78.07	-44.13	122.20	114	12	Peak
8	5855.000	74.19	0.58	74.77	-36.03	110.80	114	12	Peak
9	5875.000	68.08	0.57	68.64	-36.56	105.20	114	12	Peak
10	5925.000	58.13	0.53	58.65	-9.55	68.20	114	12	Peak
11	5932.400	60.50	0.52	61.02	-7.18	68.20	114	12	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

**IC Band1 Band Edge Data:**

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

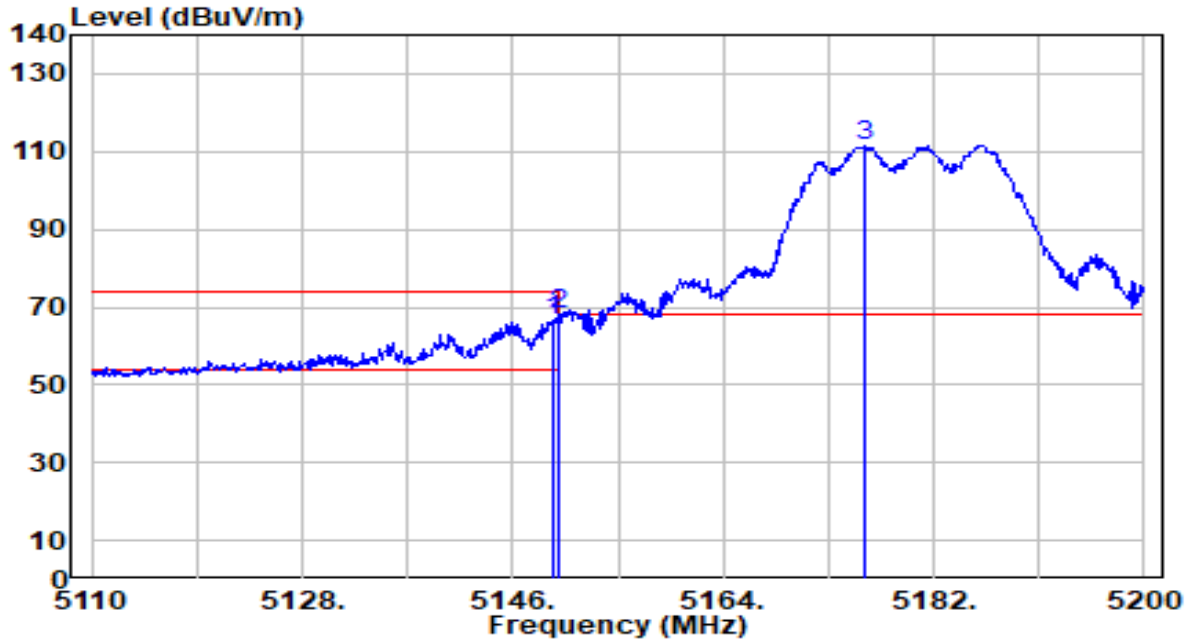


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.420	67.06	-0.72	66.34	-7.66	74.00	266	0	Peak
2	* 5150.000	69.01	-0.72	68.29	-5.71	74.00	266	0	Peak
3	5176.060	112.43	-0.73	111.70	N/A	N/A	266	0	Peak

**Note:**

1. " \*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

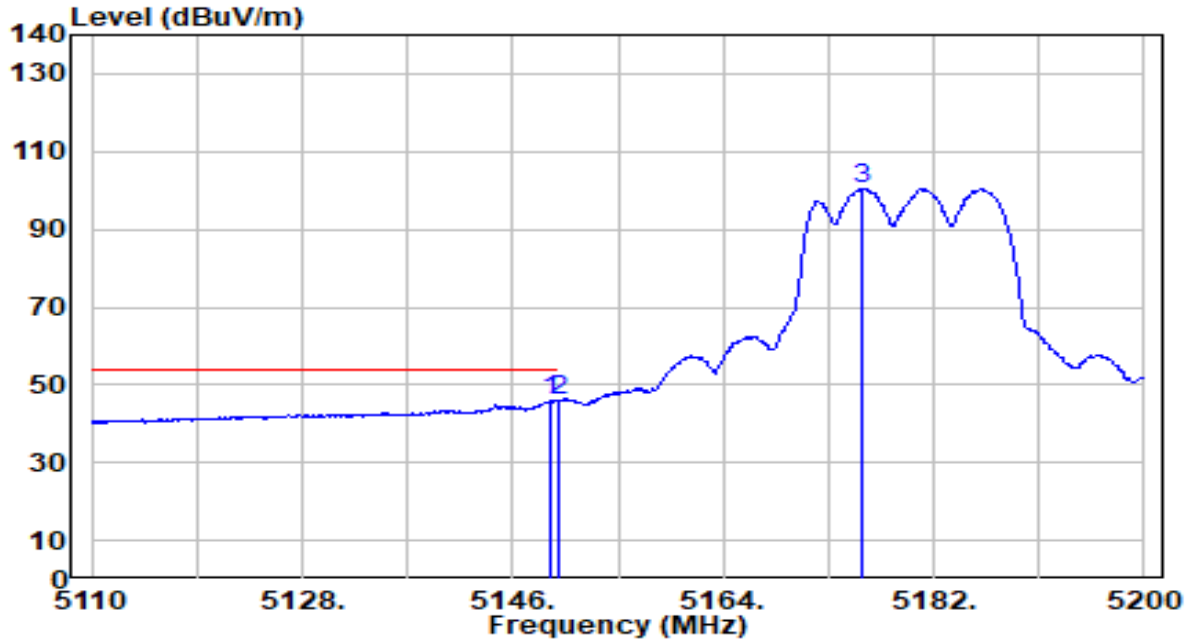


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.330	46.68	-0.72	45.96	-8.04	54.00	266	0	Average
2	* 5150.000	46.70	-0.72	45.98	-8.02	54.00	266	0	Average
3	5175.790	101.28	-0.73	100.54	N/A	N/A	266	0	Average

Note:

1. " \*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

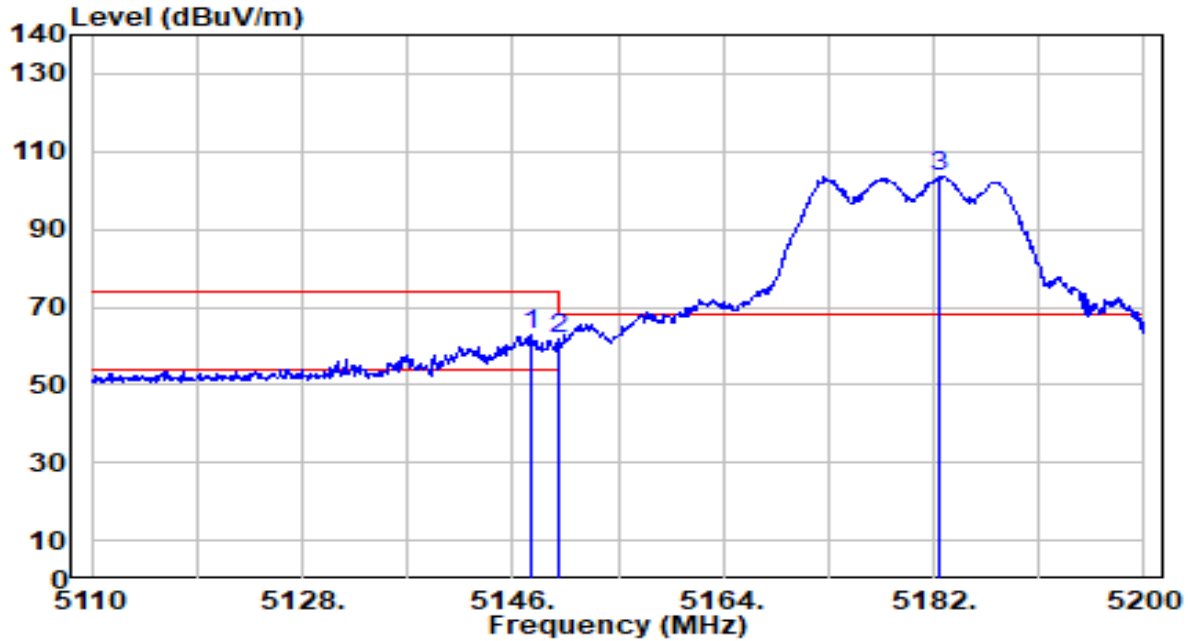


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5147.620	63.82	-0.72	63.10	-10.90	74.00	226	0	Peak
2	5150.000	62.62	-0.72	61.90	-12.10	74.00	226	0	Peak
3	5182.540	104.39	-0.73	103.66	N/A	N/A	226	0	Peak

Note:

1. " \*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

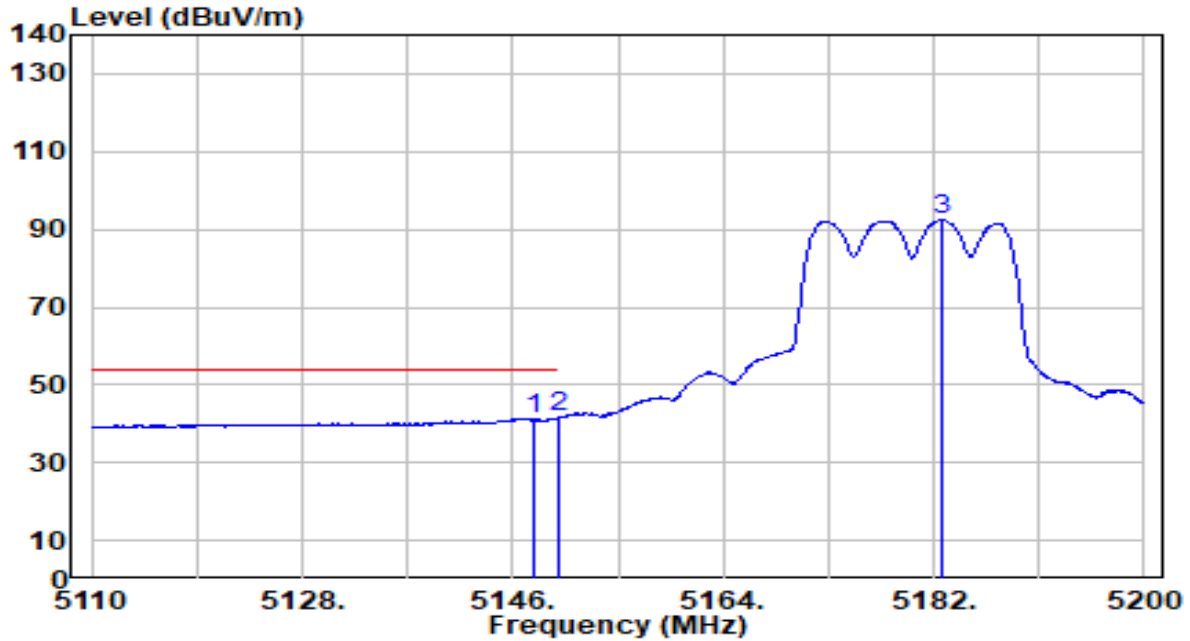


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5147.800	42.06	-0.72	41.34	-12.66	54.00	226	0	Average
2	* 5150.000	42.28	-0.72	41.56	-12.44	54.00	226	0	Average
3	5182.630	93.08	-0.73	92.35	N/A	N/A	226	0	Average

Note:

1. " \*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

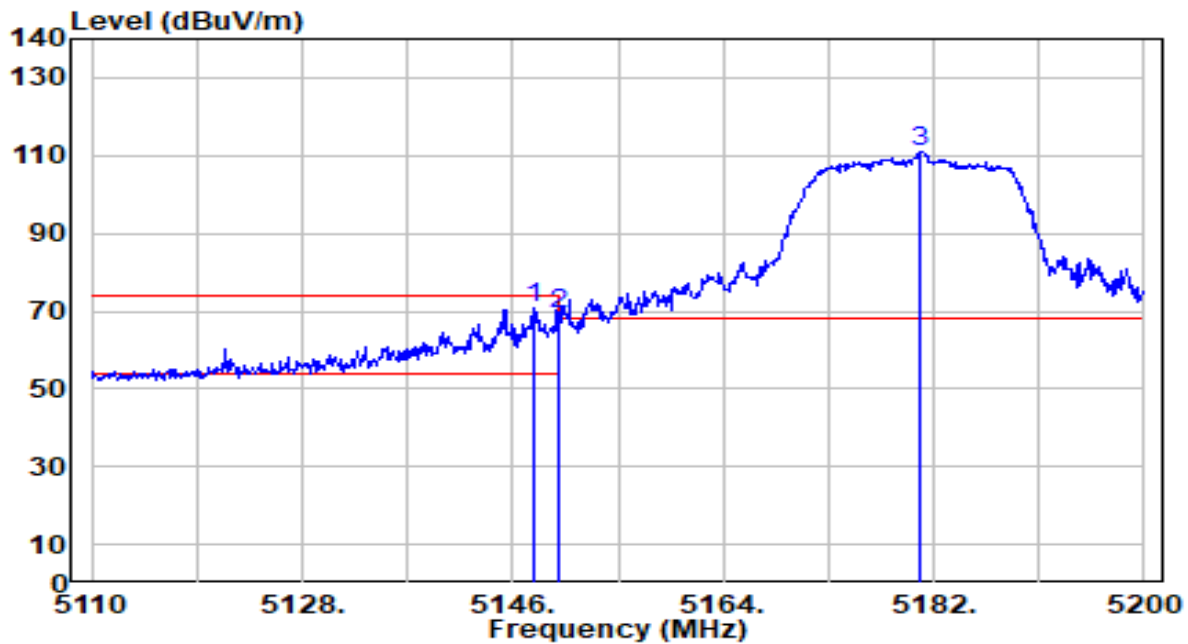


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5147.710	71.52	-0.72	70.80	-3.20	74.00	266	0	Peak
2	5150.000	69.81	-0.72	69.09	-4.91	74.00	266	0	Peak
3	5180.920	111.48	-0.73	110.75	N/A	N/A	266	0	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

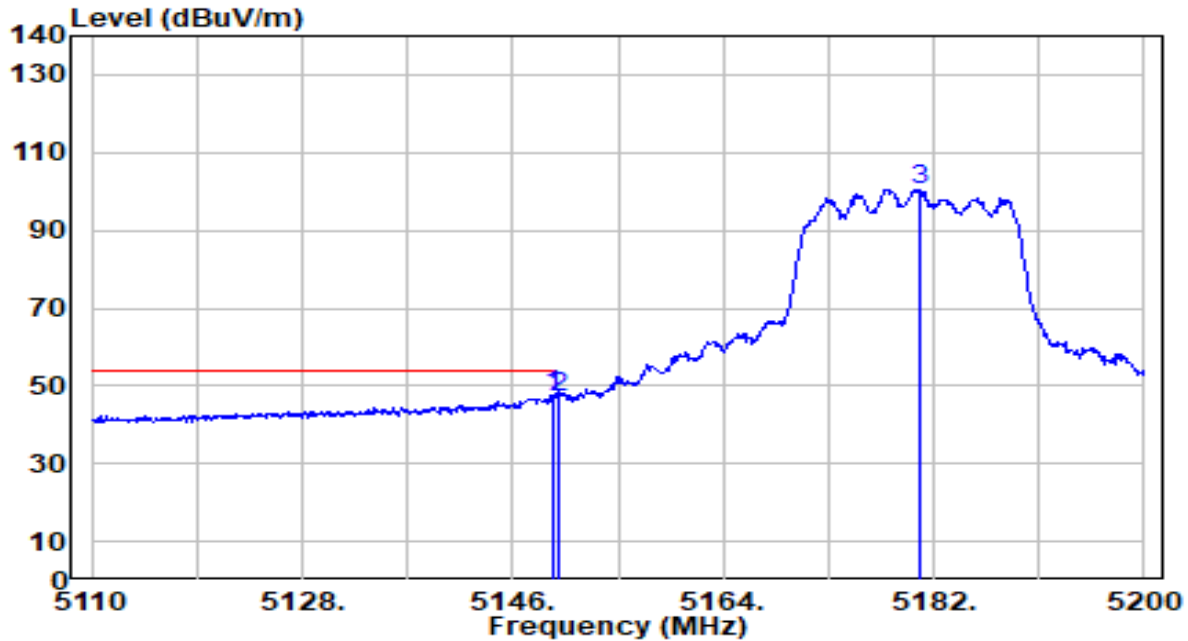


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5149.420	48.33	-0.72	47.61	-6.39	54.00	266	0	Average
2	5150.000	47.91	-0.72	47.19	-6.81	54.00	266	0	Average
3	5180.740	101.33	-0.73	100.60	N/A	N/A	266	0	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

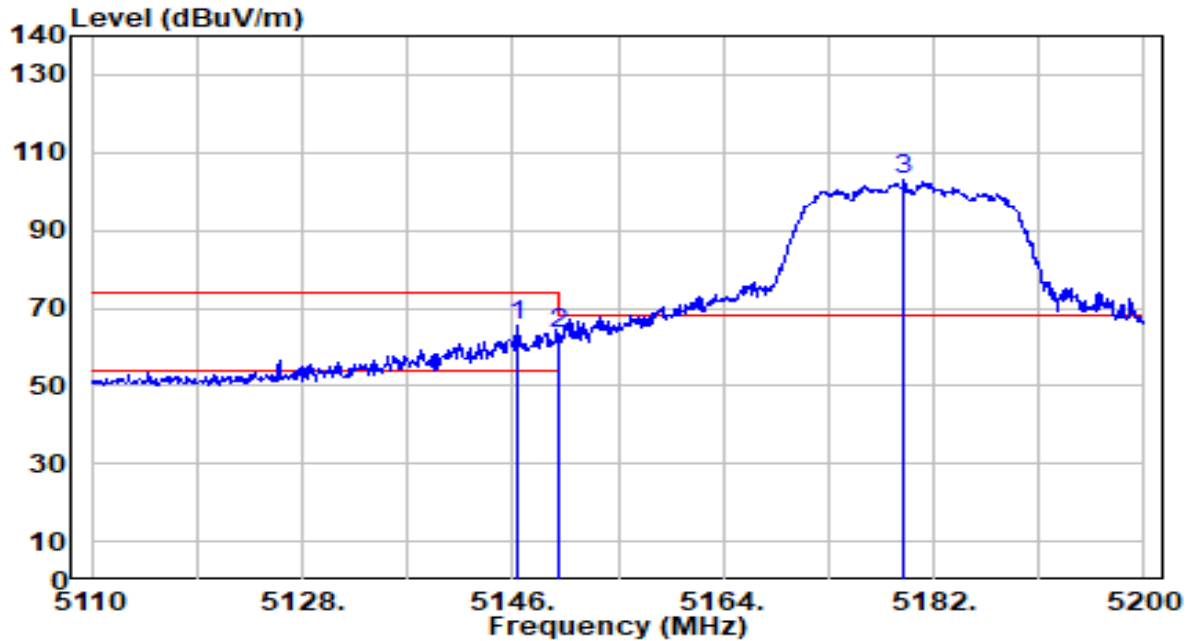


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5146.450	65.98	-0.72	65.27	-8.73	74.00	208	0	Peak
2	5150.000	63.87	-0.72	63.15	-10.85	74.00	208	0	Peak
3	5179.480	103.87	-0.73	103.14	N/A	N/A	208	0	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

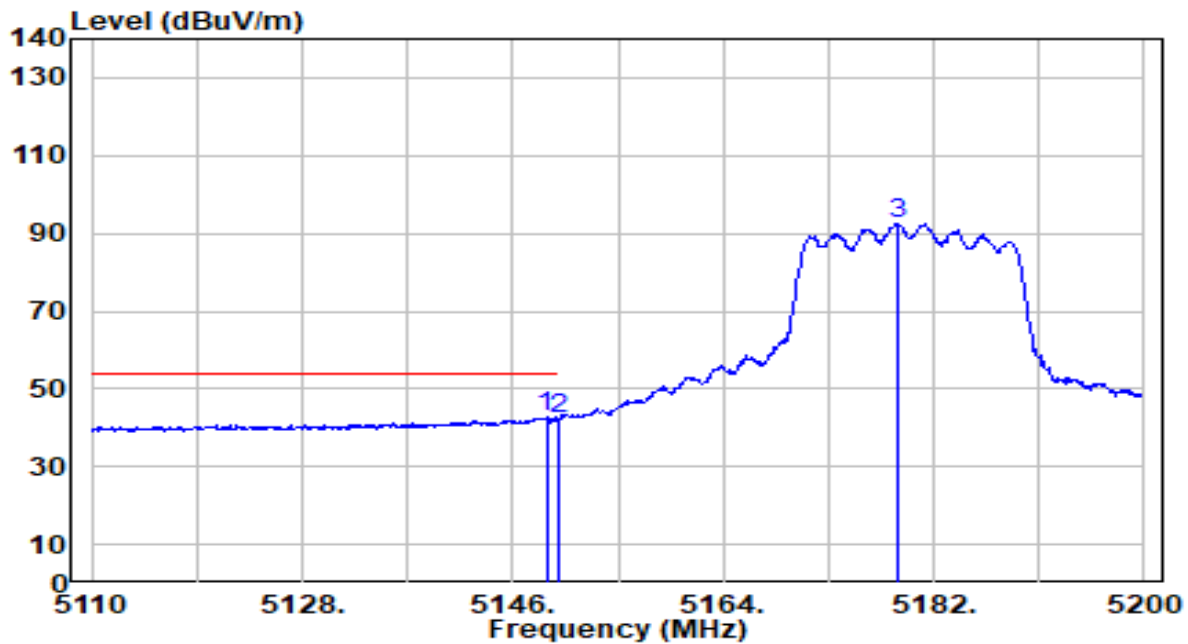


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5148.880	43.26	-0.72	42.55	-11.45	54.00	208	0	Average
2		5150.000	43.02	-0.72	42.31	-11.69	54.00	208	0	Average
3		5178.850	93.43	-0.73	92.70	N/A	N/A	208	0	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

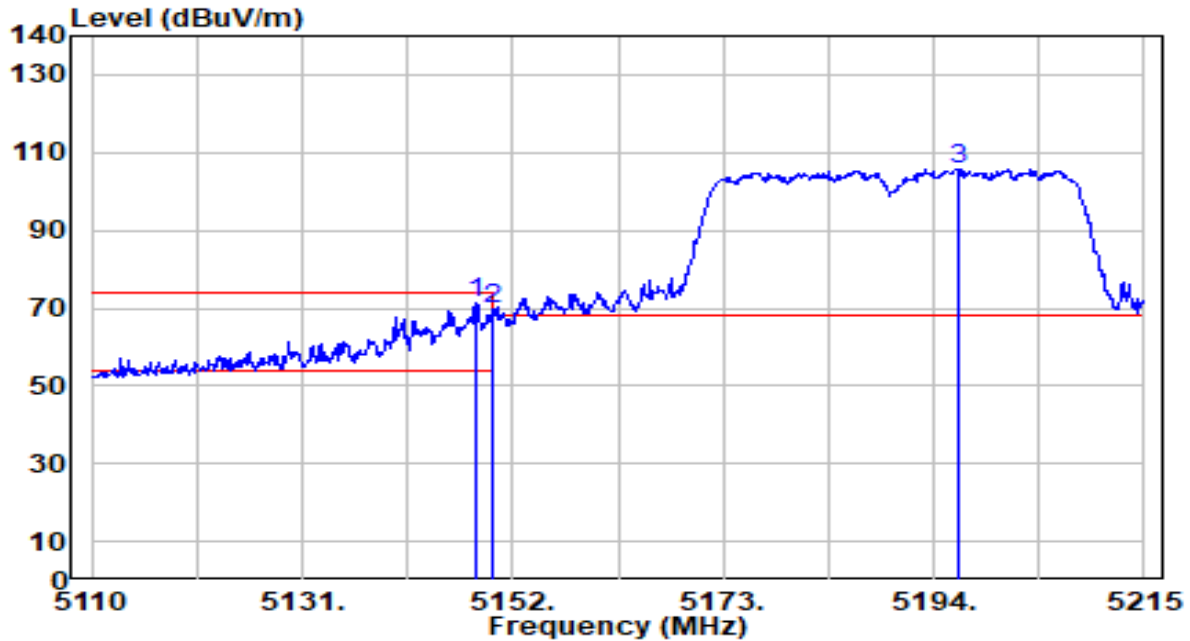


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.220	71.92	-0.72	71.20	-2.80	74.00	253	358	Peak
2	5150.000	70.37	-0.72	69.66	-4.34	74.00	253	358	Peak
3	5196.415	106.46	-0.74	105.72	N/A	N/A	253	358	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

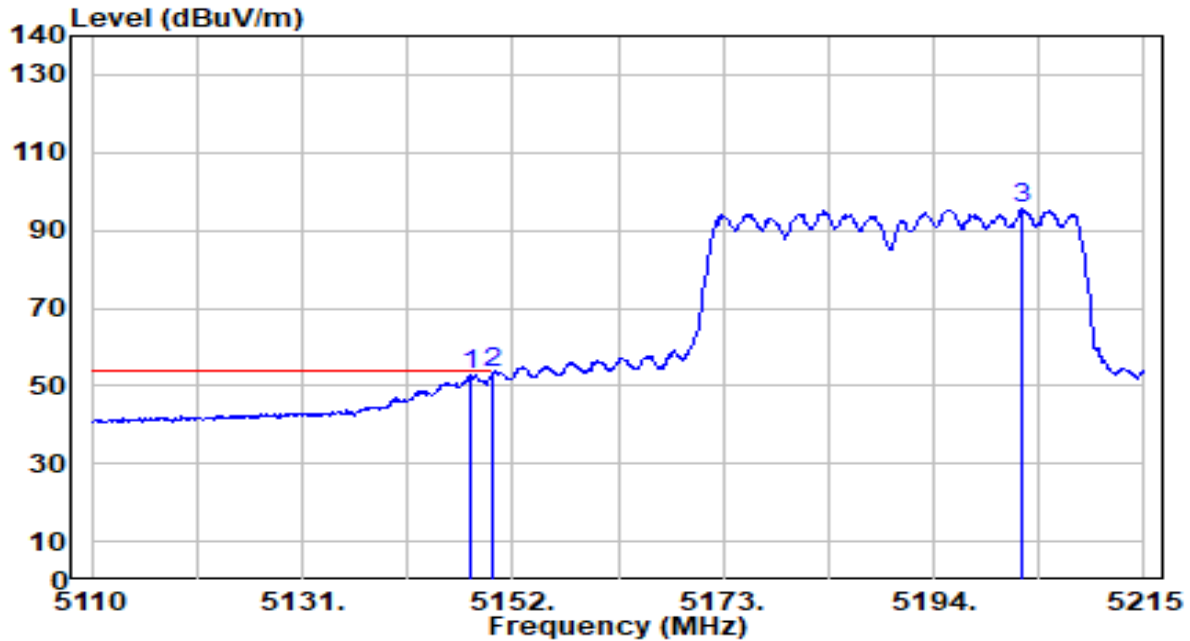


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5147.905	53.63	-0.72	52.91	-1.09	54.00	253	358	Average
2	* 5150.000	54.21	-0.72	53.49	-0.51	54.00	253	358	Average
3	5202.715	96.31	-0.75	95.56	N/A	N/A	253	358	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

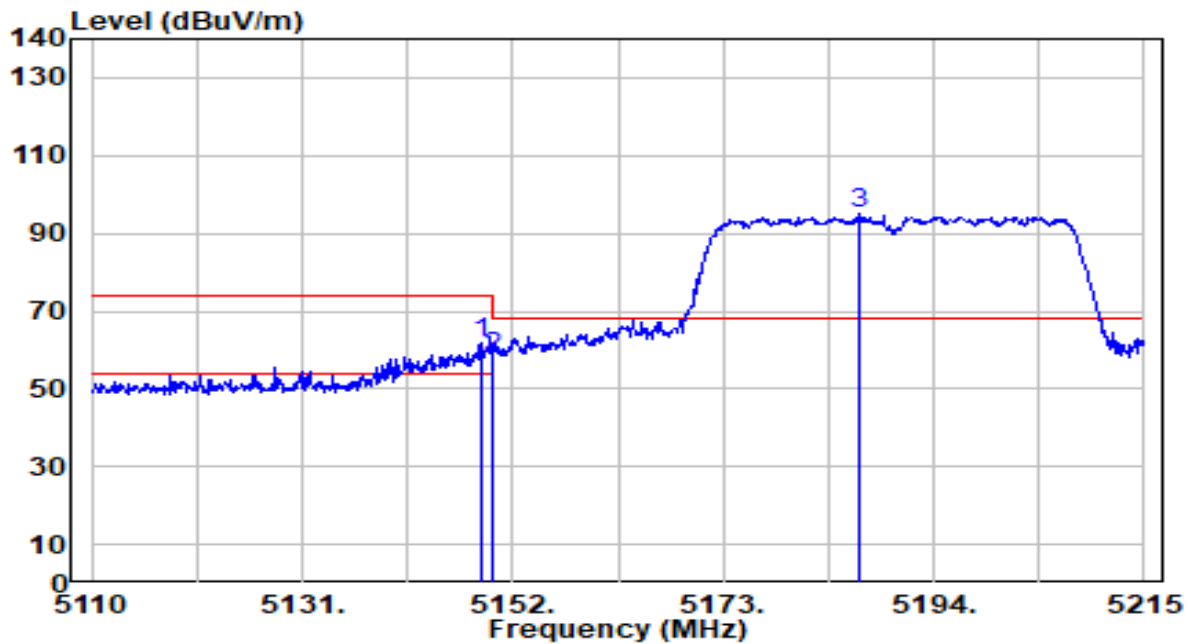


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.955	62.77	-0.72	62.05	-11.95	74.00	298	7	Peak
2	5150.000	58.65	-0.72	57.93	-16.07	74.00	298	7	Peak
3	5186.545	95.79	-0.74	95.05	N/A	N/A	298	7	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

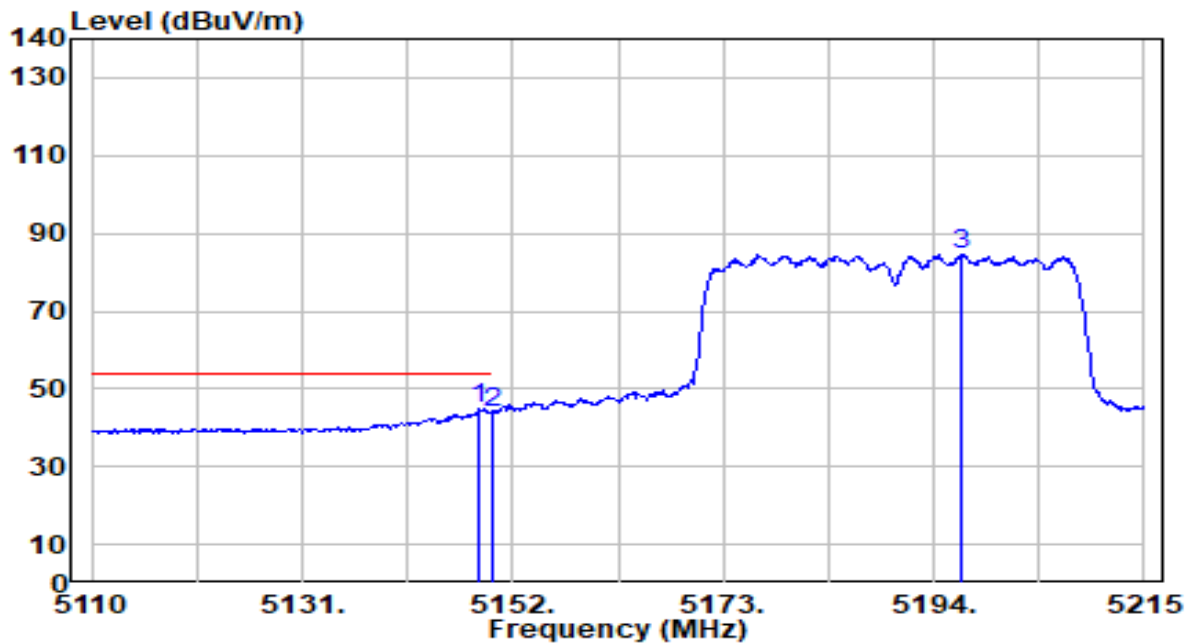


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.745	45.81	-0.72	45.09	-8.91	54.00	298	7	Average
2	5150.000	44.73	-0.72	44.01	-9.99	54.00	298	7	Average
3	5196.835	85.26	-0.74	84.52	N/A	N/A	298	7	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

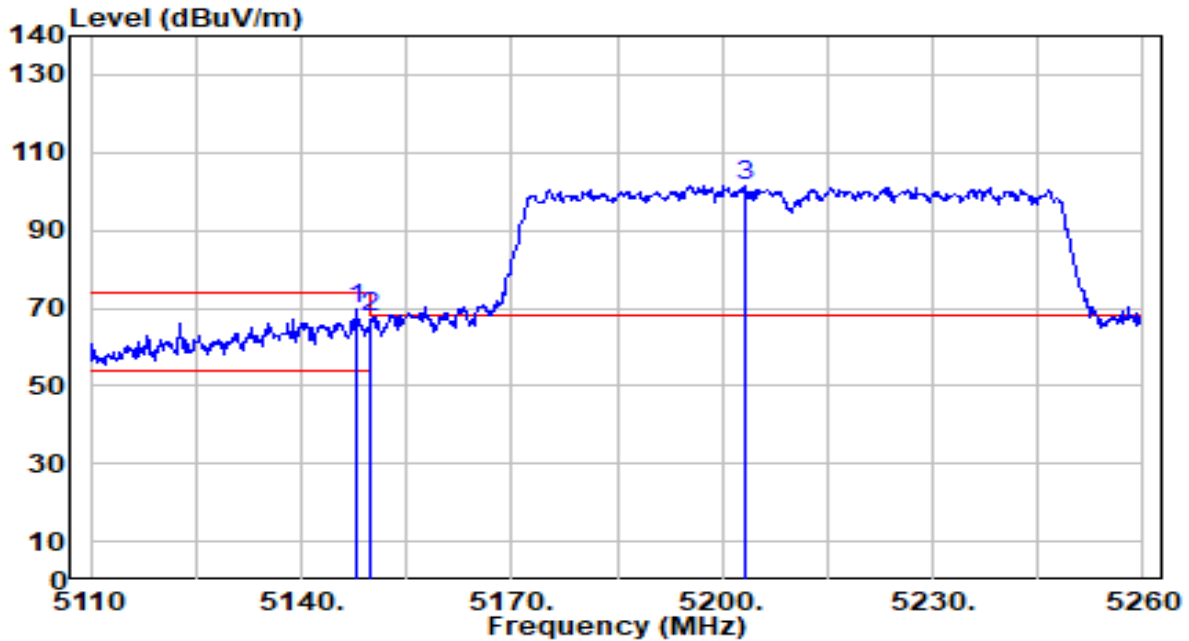


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5147.800	70.32	-0.72	69.60	-4.40	74.00	253	358	Peak
2		5150.000	68.54	-0.72	67.82	-6.18	74.00	253	358	Peak
3		5203.150	102.15	-0.75	101.40	N/A	N/A	253	358	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

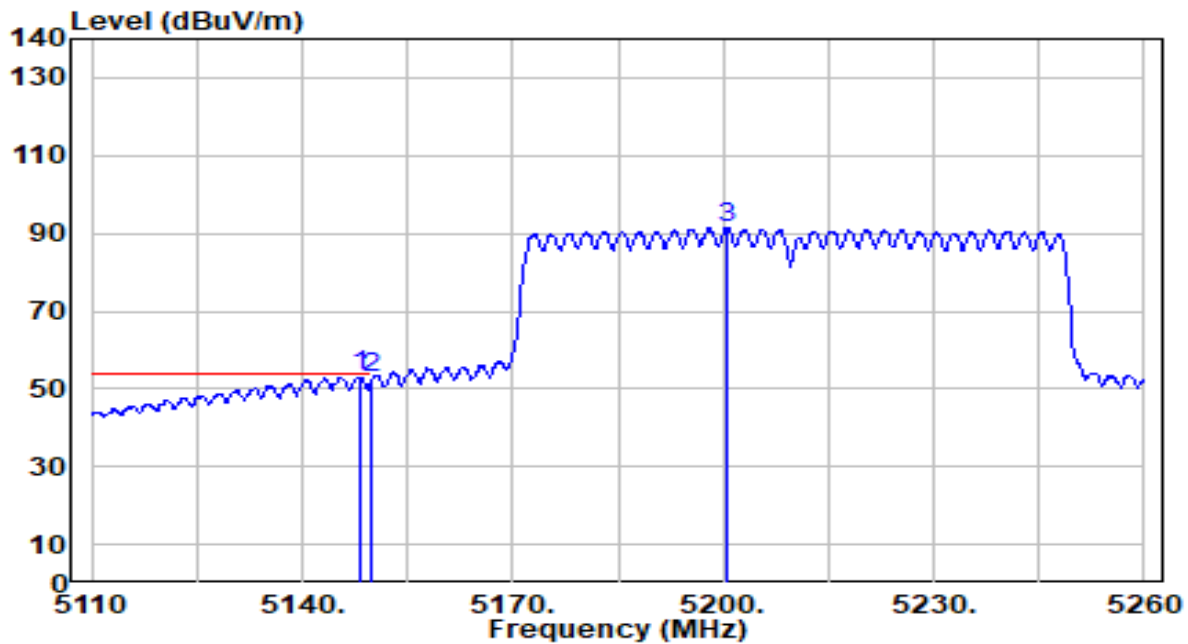


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	54.20	-0.72	53.48	-0.52	54.00	253	358	Average
2		53.70	-0.72	52.98	-1.02	54.00	253	358	Average
3		92.00	-0.74	91.26	N/A	N/A	253	358	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

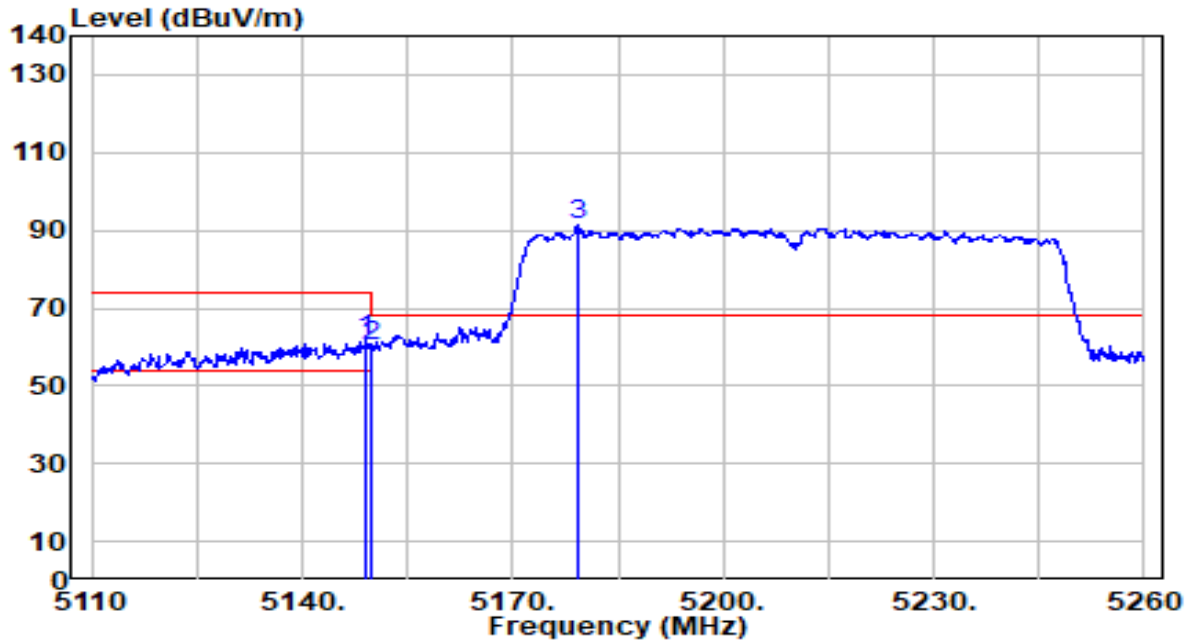


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5149.000	62.31	-0.72	61.59	-12.41	74.00	298	7	Peak
2	5150.000	60.69	-0.72	59.97	-14.03	74.00	298	7	Peak
3	5179.150	92.06	-0.73	91.33	N/A	N/A	298	7	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

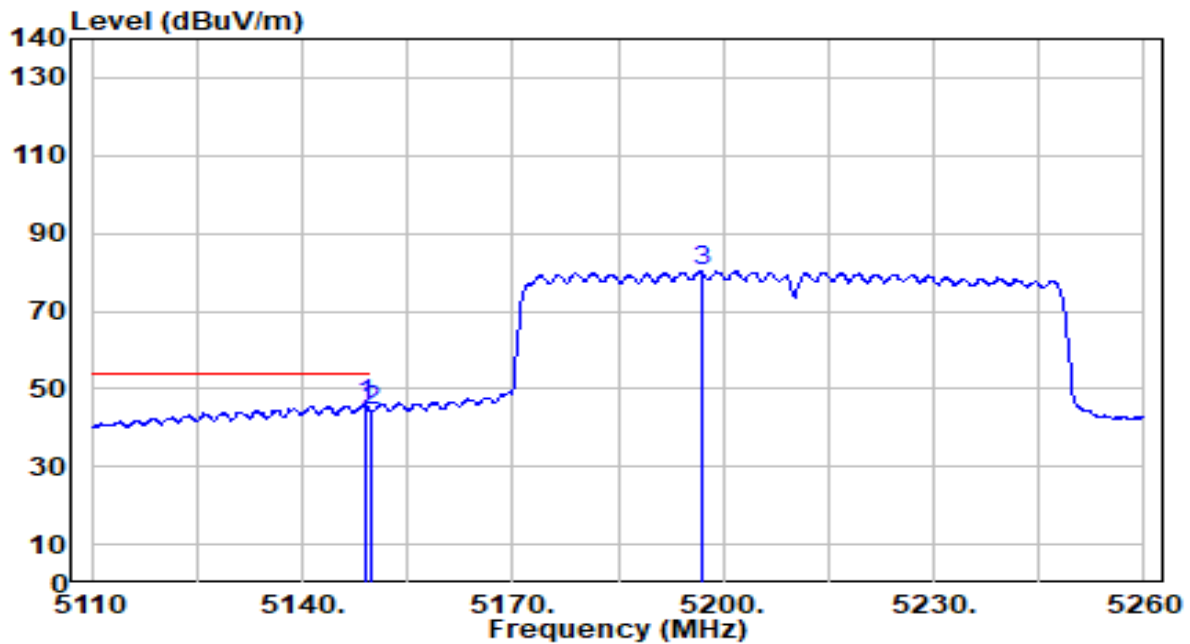


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5149.000	46.46	-0.72	45.75	-8.25	54.00	298	7	Average
2		5150.000	45.34	-0.72	44.63	-9.37	54.00	298	7	Average
3		5196.850	80.96	-0.74	80.22	N/A	N/A	298	7	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

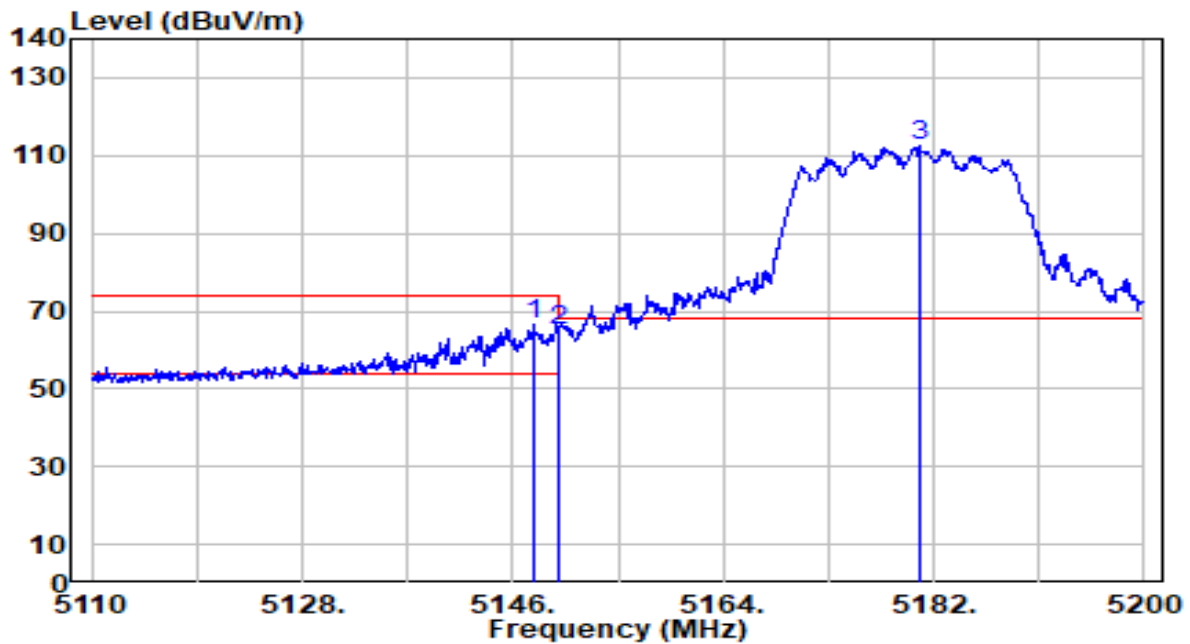


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5147.710	67.28	-0.72	66.56	-7.44	74.00	266	0	Peak
2	5150.000	65.81	-0.72	65.09	-8.91	74.00	266	0	Peak
3	5180.740	113.16	-0.73	112.43	N/A	N/A	266	0	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

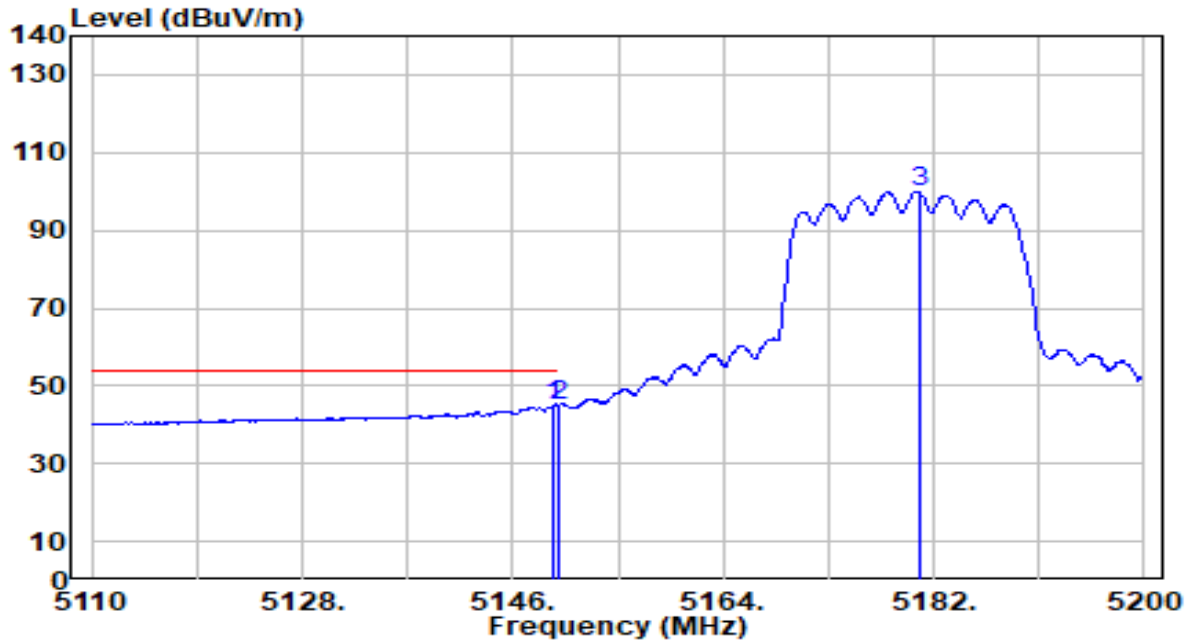


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.420	45.46	-0.72	44.74	-9.26	54.00	266	0	Average
2	* 5150.000	45.83	-0.72	45.12	-8.88	54.00	266	0	Average
3	5180.740	100.70	-0.73	99.96	N/A	N/A	266	0	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

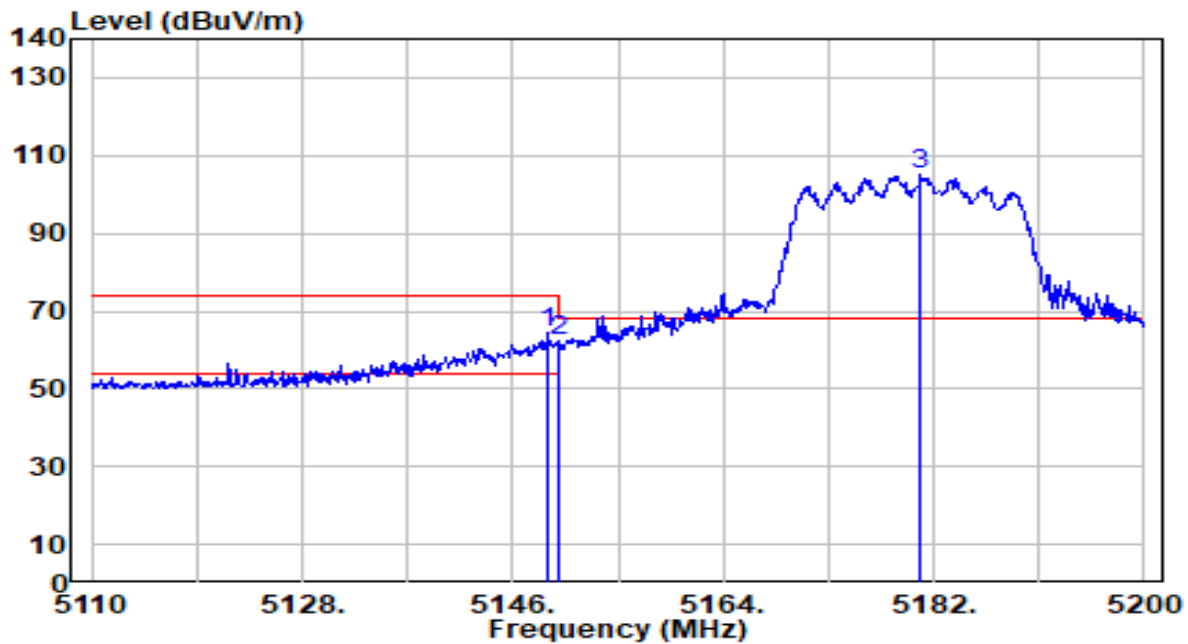


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.970	64.99	-0.72	64.27	-9.73	74.00	208	0	Peak
2	5150.000	63.14	-0.72	62.43	-11.57	74.00	208	0	Peak
3	5180.920	105.67	-0.73	104.94	N/A	N/A	208	0	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

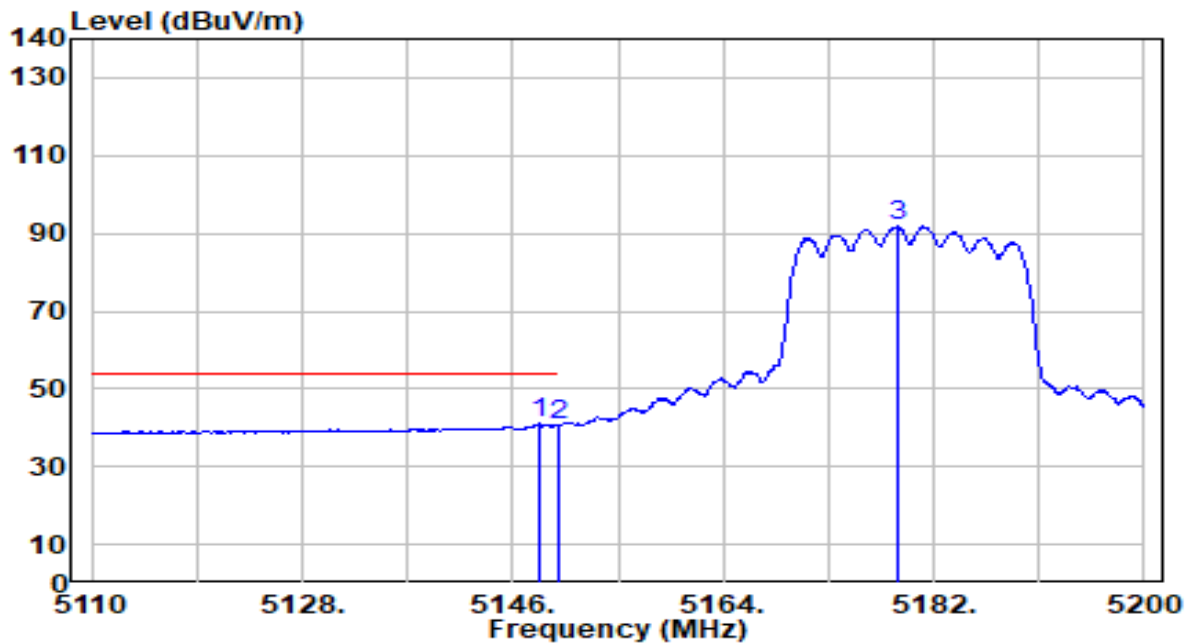


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5148.250	41.70	-0.72	40.98	-13.02	54.00	208	0	Average
2		5150.000	41.30	-0.72	40.58	-13.42	54.00	208	0	Average
3		5178.850	92.51	-0.73	91.78	N/A	N/A	208	0	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

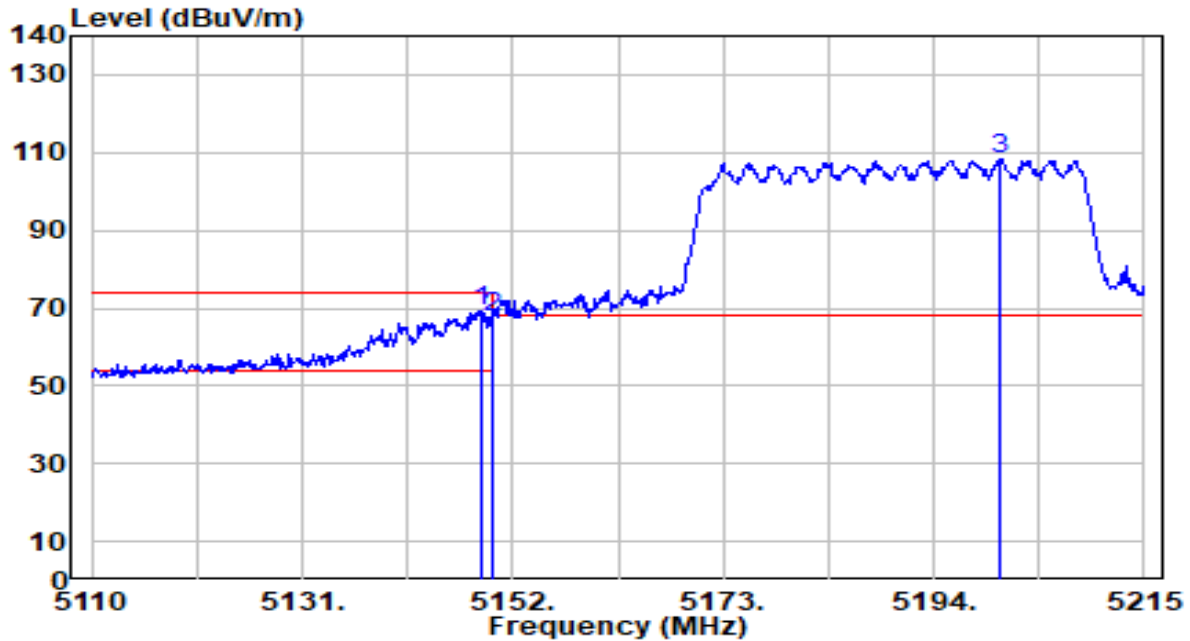


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.955	69.99	-0.72	69.27	-4.73	74.00	290	360	Peak
2	5150.000	68.26	-0.72	67.55	-6.45	74.00	290	360	Peak
3	5200.615	109.31	-0.74	108.56	N/A	N/A	290	360	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

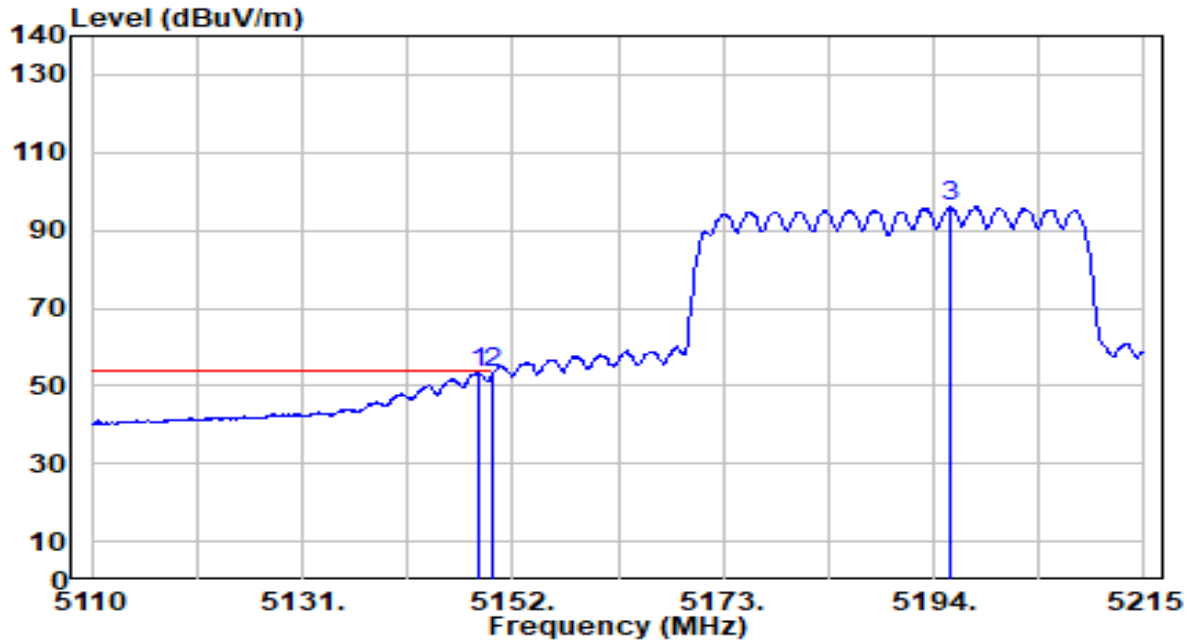


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.640	54.21	-0.72	53.49	-0.51	54.00	290	360	Average
2	5150.000	53.97	-0.72	53.25	-0.75	54.00	290	360	Average
3	5195.680	96.67	-0.74	95.93	N/A	N/A	290	360	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

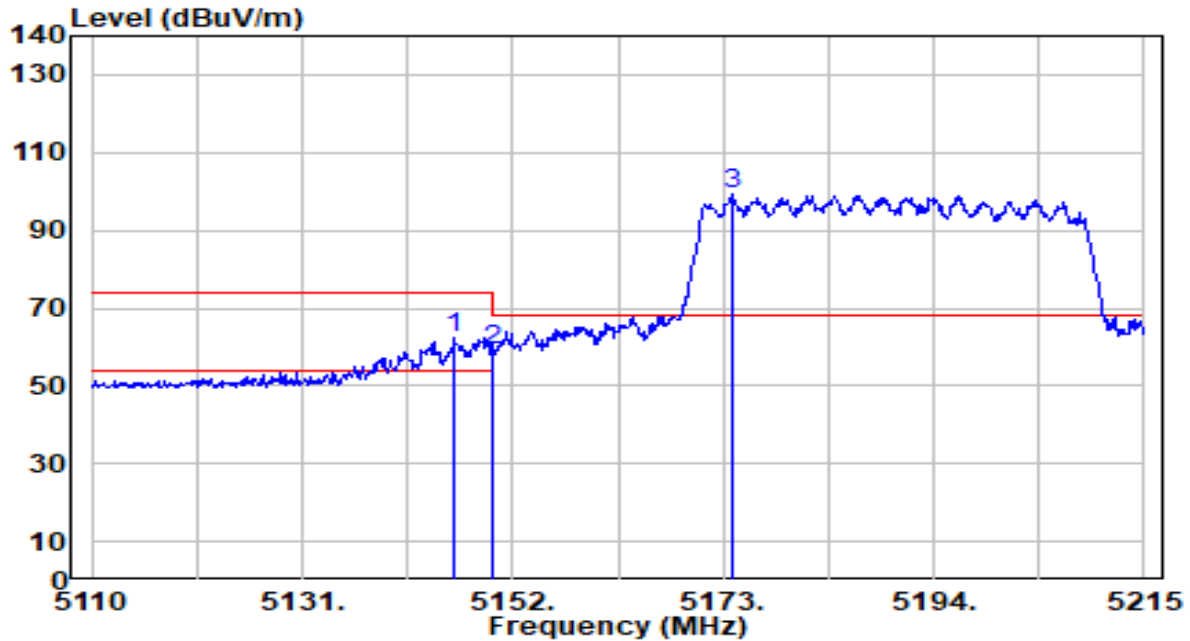


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5146.120	63.06	-0.72	62.35	-11.65	74.00	290	0	Peak
2	5150.000	59.66	-0.72	58.95	-15.05	74.00	290	0	Peak
3	5174.050	100.08	-0.73	99.34	N/A	N/A	290	0	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

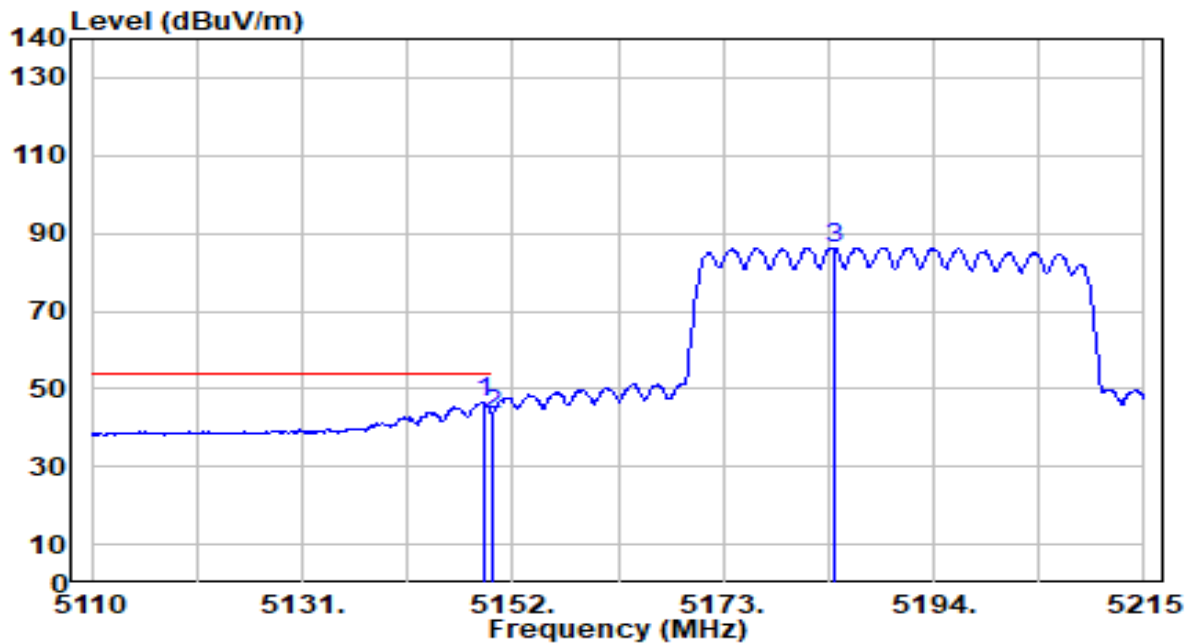


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5149.060	47.15	-0.72	46.43	-7.57	54.00	290	0	Average
2	5150.000	44.19	-0.72	43.47	-10.53	54.00	290	0	Average
3	5184.130	87.05	-0.74	86.32	N/A	N/A	290	0	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

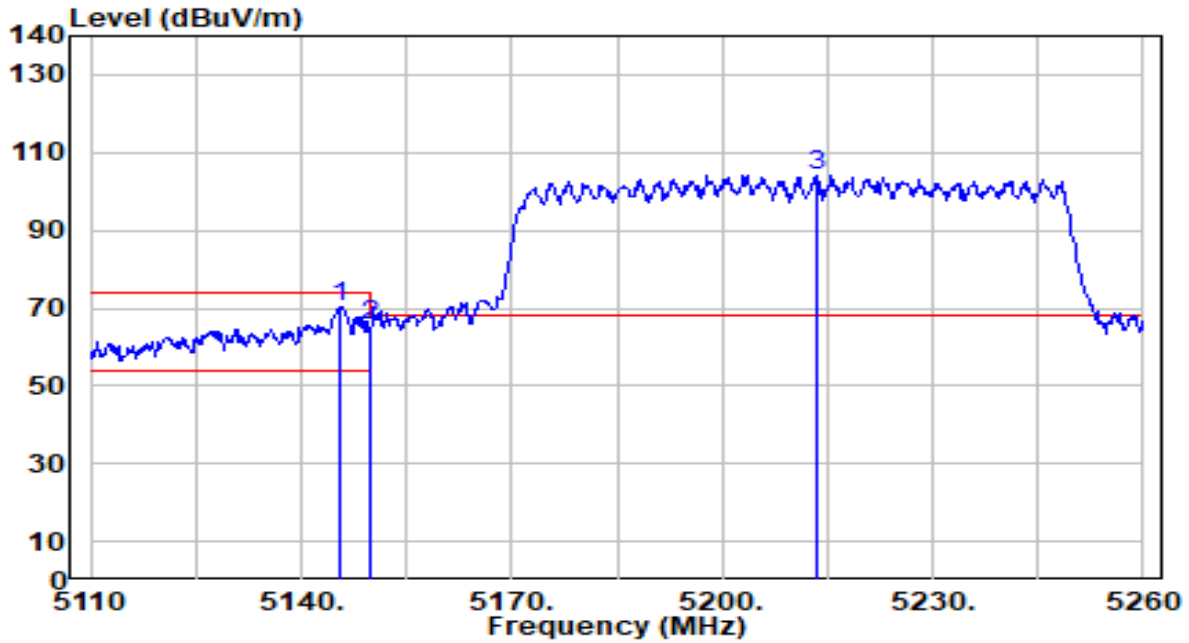


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5145.550	70.98	-0.72	70.26	-3.74	74.00	290	360	Peak
2	5150.000	66.01	-0.72	65.29	-8.71	74.00	290	360	Peak
3	5213.350	104.92	-0.76	104.15	N/A	N/A	290	360	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

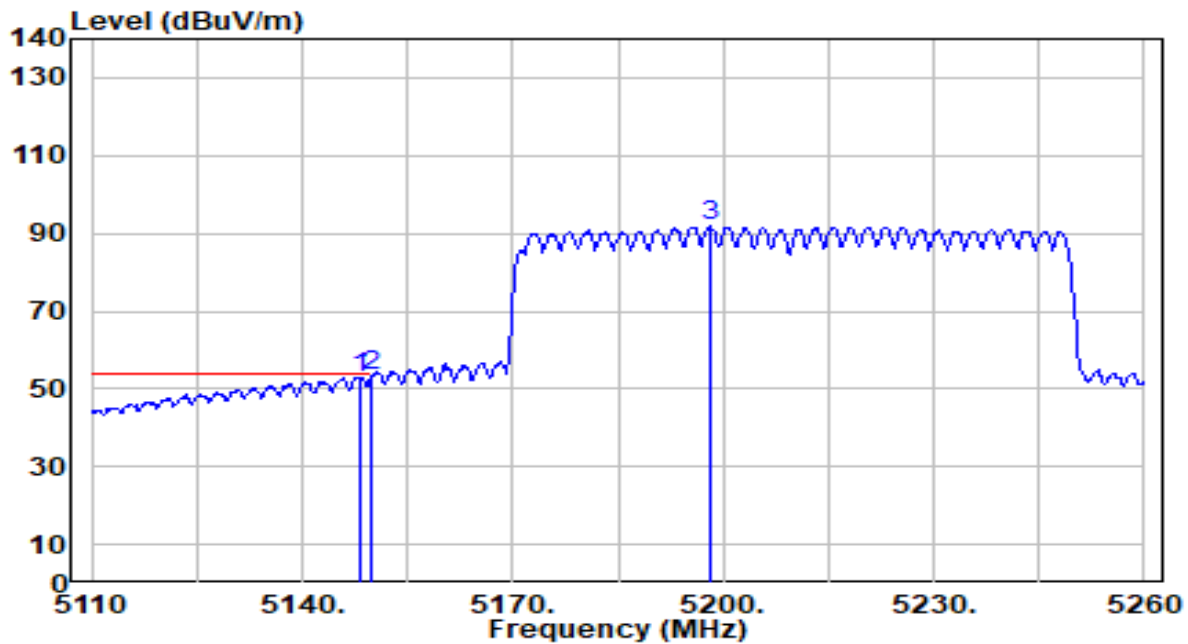


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.400	53.79	-0.72	53.07	-0.93	54.00	290	360	Average
2	* 5150.000	54.22	-0.72	53.50	-0.50	54.00	290	360	Average
3	5198.050	92.54	-0.74	91.79	N/A	N/A	290	360	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

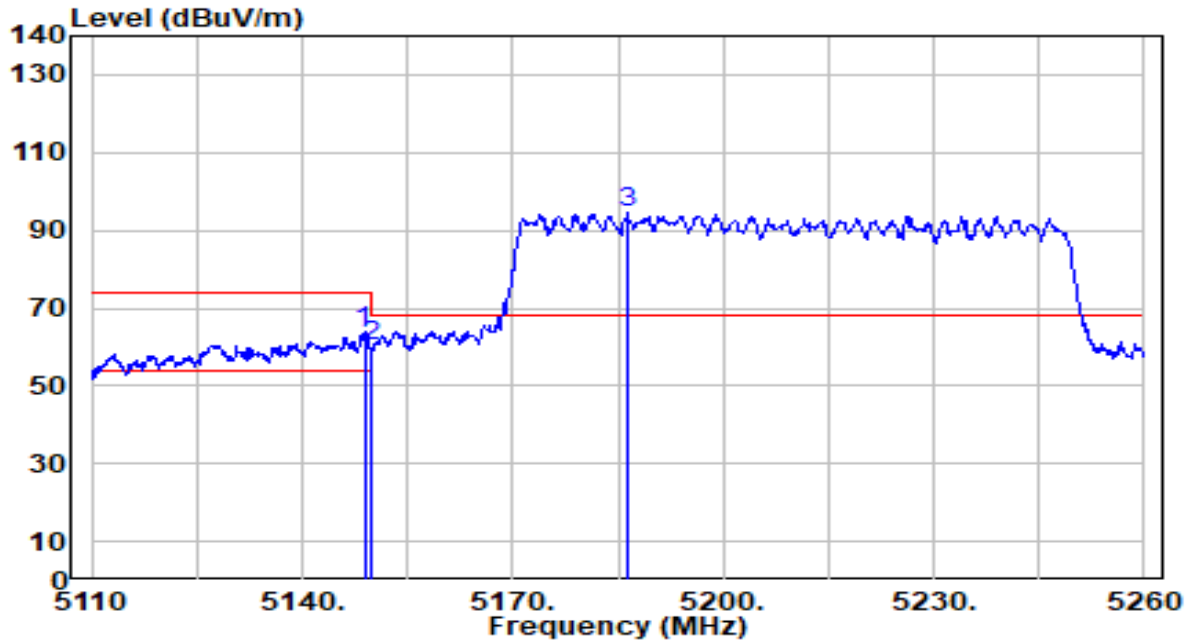


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5148.850	64.64	-0.72	63.92	-10.08	74.00	290	0	Peak
2		5150.000	60.85	-0.72	60.13	-13.87	74.00	290	0	Peak
3		5186.350	95.34	-0.74	94.60	N/A	N/A	290	0	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2023-11-10
Factor	DRH18-E	Temp. / Humidity	24°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

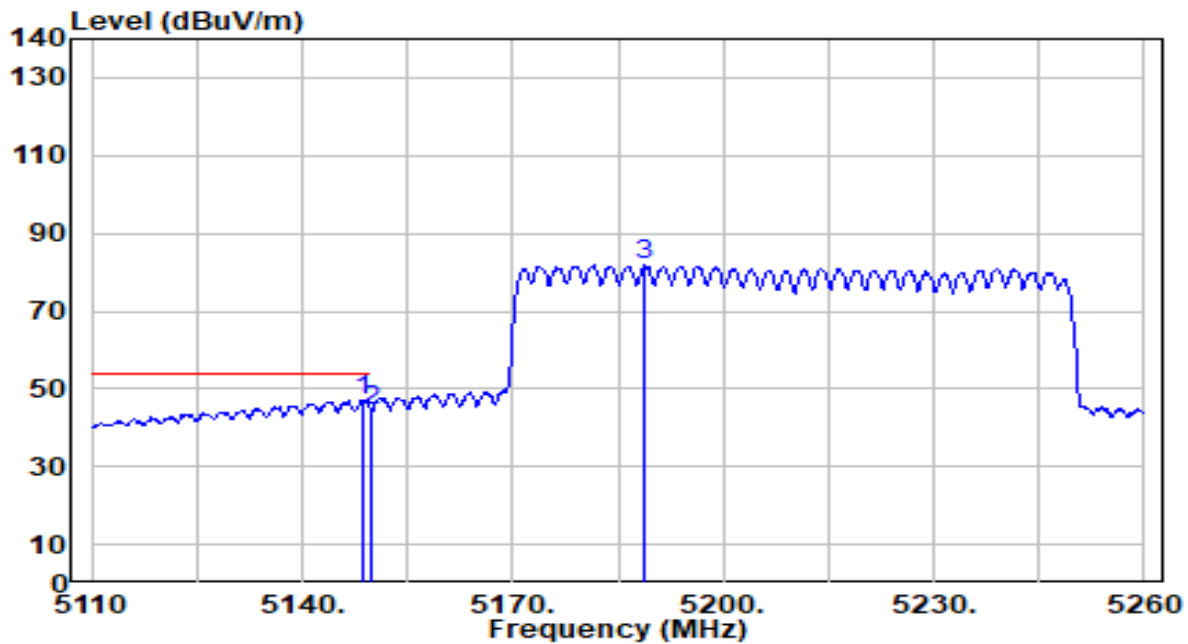

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5148.550	47.80	-0.72	47.08	-6.92	54.00	290	0	Average
2		5150.000	45.28	-0.72	44.56	-9.44	54.00	290	0	Average
3		5188.750	82.45	-0.74	81.71	N/A	N/A	290	0	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preampifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.9. AC Conducted Emissions Measurement

### 7.9.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB $\mu$ V)	AV (dB $\mu$ V)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


### 7.9.2. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

### 7.9.3. Test Setup

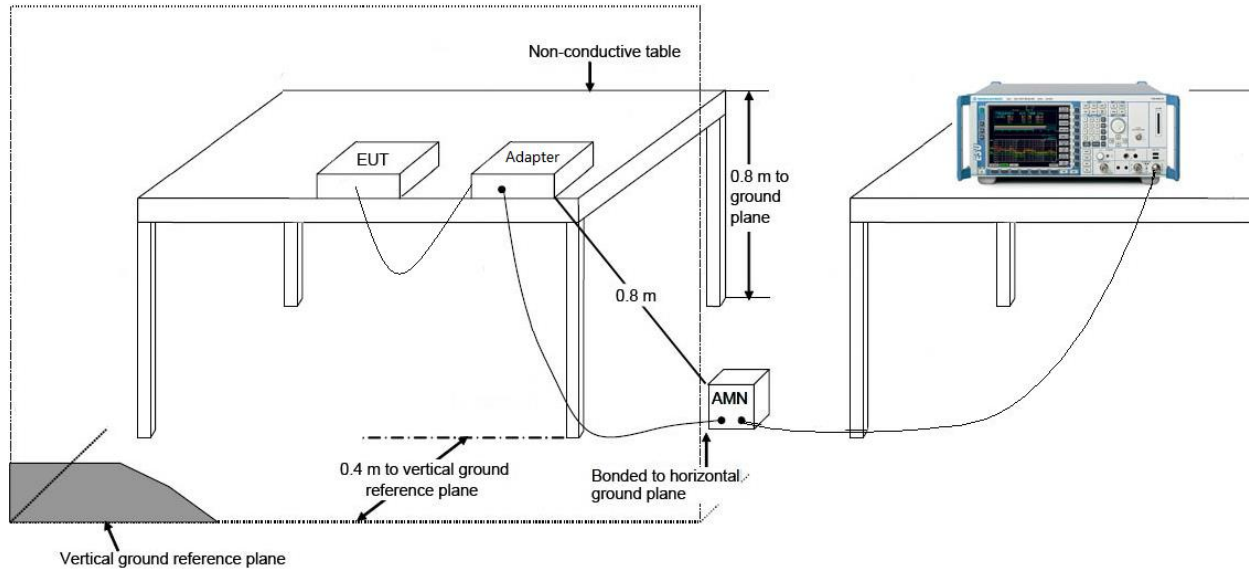

#### **7.9.4. Test Result**

Note 1: Reference Original Report Grant Date: 01/16/2023, FCC ID: 2AF82-AP6275S.

Note 2: Reference Original Report Grant Date: 01/17/2023, IC: 23322-AP6275S.

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Module, FCC ID:**

**2AF82-AP6275S & IC: 23322-AP6275S** is in compliance with Part 15E & RSS-247 of the FCC & IC Rules.

## **Appendix A : Test Photograph**

Refer to “2311TWN801-UT” file.

## **Appendix B : External Photograph**

Refer to “2311TWN801-UE” file.

## **Appendix C : Internal Photograph**

Refer to “2311TWN801-UI” file.

————— The End —————