

Q40XXXXX-XXX-XXX

客户 Customer	QBIC
型号 Model	TD-1050
销往 Sales Area	EU/USA

安规签核Safety parts:

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

内销中文字体要求高度1.8mm以上

Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>
-----	-------------------------------------	----	--------------------------

针对带有UL logo的标签,其厂家须在最小包装上标示UL Recognized Component Mark  公司名称,型号及 UL file no.


条码印刷:
barcode print:
1. 所有条码等级: C级及以上, 客户有特殊要求除外;

REVISION

VERSION A
版本变更说明:
Version Changed Description:

备注Remark:

嘉捷科技(福清)有限公司
TPV Electronics (Fujian) Co., Ltd.
地址(Add): 中国福建省福清市元洪路上部
Shangzheng, Yuanhong Road, Fuqing City,
Fujian Province, China
电话(Tel): +86-591-85285555 85285559
传真(Fax): +86-591-85285447
邮编(Postcode): 350301

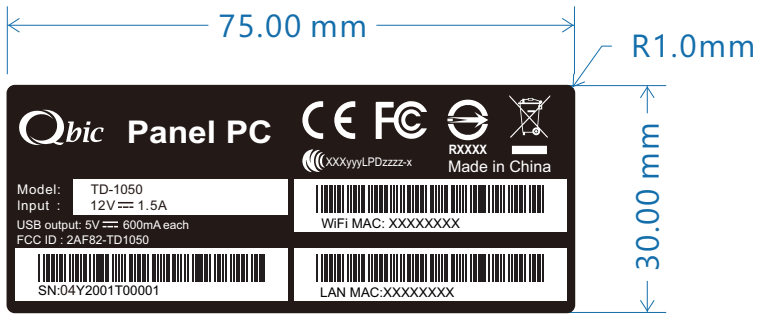

NOTE:


- 印刷如上图
Printing as the drawing
- 尺寸:具体见上图所示(公差: +/-0.2mm),R=2mm
Dimension:as the above drawing(Tolerance:+/-0.2mm),R=2mm
- 材质: 50#PET带不干背胶(材质需经过UL认证).
Material:50#PET with glue on the backside (material must be certified by UL laboratory)
- 底色: 黑色; 字体颜色: 白色
Background color:Black, Fonts color:White
- 贴附位置: 后壳(如图示)
- 粘力: 将label切成25mm宽, 一端粘贴于钢板上, 以180°方向的力拉胶带另一端, 所得拉力即为粘力。用粘力测试仪进行测试。
Stickiness strength :Cut label into 25mm width ,one end paste on the plate , with 180 °direction pulling the other end of the tape, the pull is stickiness strength. With stickiness strength instrument for testing.
- 正常耐温测试: 在钢板上耐温范围为-20~100°癆, 在80~100°癆保持8小时后不翘角,不分层,不脱落,不起泡等。
在塑胶、纸箱上耐温范围为-20~65°C, 在65°癆保持8小时后不翘角,不分层,不脱落,不起泡等。
The normal temperature test: The range of temperature on plate is -20 ~ 100 °C . In 80 ~ 100 °C to maintain 8 hours , the label should not be warp,delamination,frothy and so on. The range of temperature on plastic and carton is -20 ~ 65 °C. In 65 °C to maintain 8 hours ,the label should not be warp, delamination,frothy and so on.
- 耐温湿度循环测试: 循环条件(贴在塑胶咬花面 (PET) 贴在塑胶咬花面): 温度-20~65°癆, 湿度30~90%, 时间 96小时后不翘角不分层不脱落不起泡等。
Temperature and humidity cycle test : Cycle conditions(stick on texture(PET), stick on texture):In temperature of -20 ~ 65 °C and humidity of 30~90%to maintain 96 hours , the label should not be warp,delamination,frothy and so on.
- 裁切需均匀且印刷不可有溢墨及颜色不均等不良现象。
Printing ink can not have overflow and printing color can not be uneven etc.
- 包装方式: 卷状, 连接处打齿孔。
Packing style: coil and there should be a toothed hole between the link of two pieces
- 两张连接处距离3mm, 左右边离型纸3mm(公差: +/-0.5mm).
3mm should be left between the link of two pieces.Around the edge of paper distance is 3mm(Tolerance:+/-0.5mm)
- 内容由厂内打印, 具体内容由业务提供。
The content printed by the factory barcode group and the specific content provided by SS.
- 其它测试要求详见 (FQ-背胶类产品测试检验规格)。

- 根据 TPV 推行 RoHS 的有关规定, 所有的原材料及辅助材料必须符合 RoHS 的有关规定
- 所有原材料的规定物质: 如镉 (Cd) 汞 (Hg) 铅 (Pb) 六价铬 PBB's PBDE's 及镉 (Cd)+汞 (Hg)+铅 (Pb)+六价铬 (针对随机出货的包装材料) 的具体含量依据最新版 RD EMS-01<<供应商环境管理物质管控标准>>的具体限值要求执行

Serial 编码原则:

S/N: XX X XXX X X 0 0 0 0 1 (SAMPLE CODE)
1 2 3 4 5 6 7 8 9 10 11 12 13

- 第1~2 碼為年份, 年 = 公元年 - 1911, 取後二碼。
 - 第3 碼為月份, 代號如下
1月=A, 2月=B, 3月=C, 4月=D, 5月=E, 6月=J
7月=K, 8月=L, 9月=M, 10月=X, 11月=Y, 12月=Z
 - 第4~6碼為機種, 同UPC code後三碼, 代號如下
001 : FHD-100
200 :TD-1050
201 :D-1050
 - 第7 碼為ODM/OEM廠英文之縮寫, ex. T : TPV
 - 第8 碼為硬體版(首版為1)
 - 第9~13 碼為流水號, ex.00001
- 範例: 2015年11月生產的FHD-100, 代工廠TPV, 版本1, 第103台。
S/N : 0 4 Y 0 0 1 1 T 0 0 1 0 3

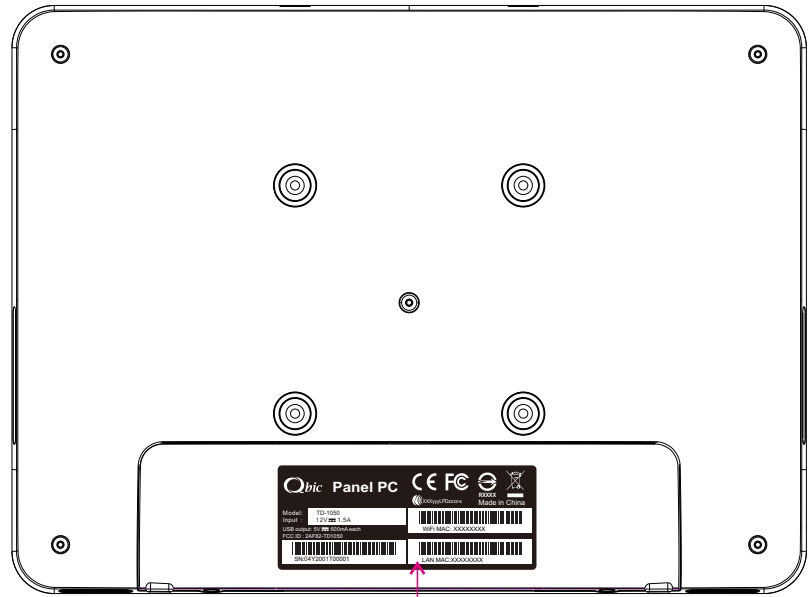

粘貼位置示意图

- According to the rule about RoHS of TPV, All raw material and assistant material should accord with the rule of RoHS
- All the stated substance of raw material: the actual content of Cd/Hg/Pb/Cr/PBB's/PBDE's and Cd+Hg+Pb+Cr(aim at the packing material with the product), should accord with the latest version of RD EMS-01<<The controlled standard about environment substance for supplier>>.